


Test_Mode	GFSK Transmitting	Test_Frequency	2402Mhz
Remark:	\	Test_Date	2026/6/22


Test Graph

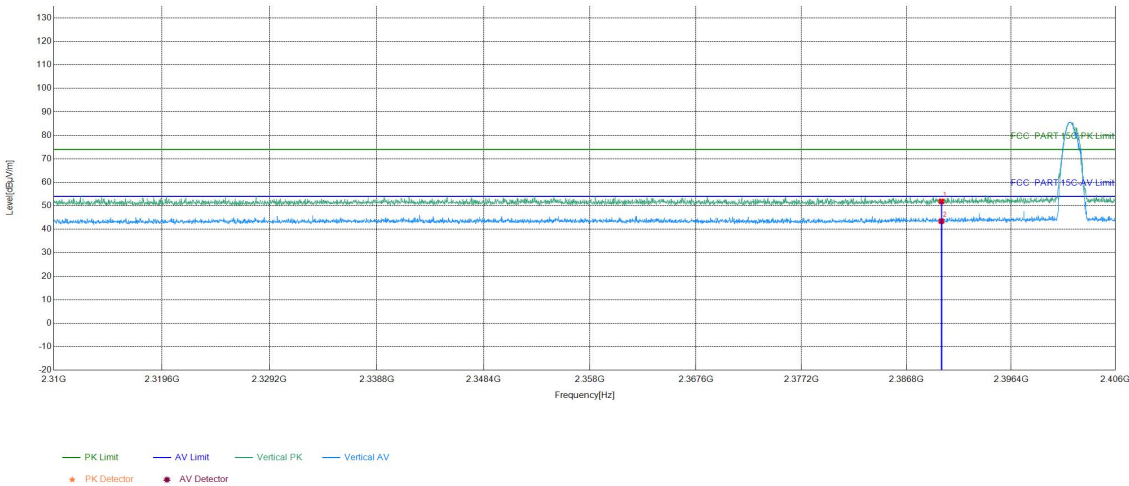

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.91	51.87	74.00	22.13	PASS	Vertical	PK
2	2390	15.96	27.49	43.45	54.00	10.55	PASS	Vertical	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2480Mhz
Remark:	\	Test_Date	2026/6/22


Test Graph

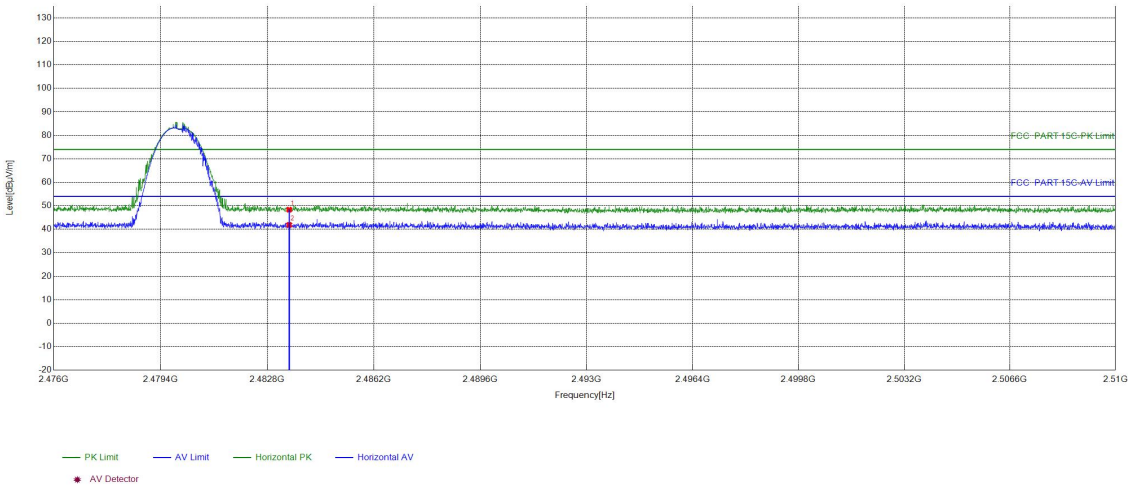

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	32.06	48.35	74.00	25.65	PASS	Horizontal	PK
2	2483.5	16.29	25.56	41.85	54.00	12.15	PASS	Horizontal	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2480Mhz
Remark:	\	Test_Date	2026/6/22


Test Graph

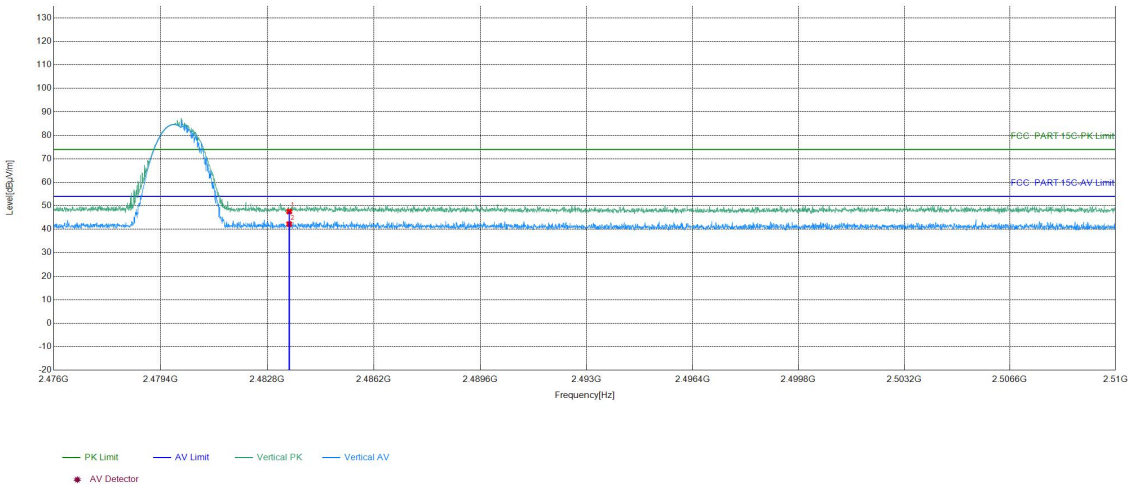

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	31.27	47.56	74.00	26.44	PASS	Vertical	PK
2	2483.5	16.29	25.92	42.21	54.00	11.79	PASS	Vertical	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2402Mhz
Remark:	\	Test_Date	2026/6/22


Test Graph

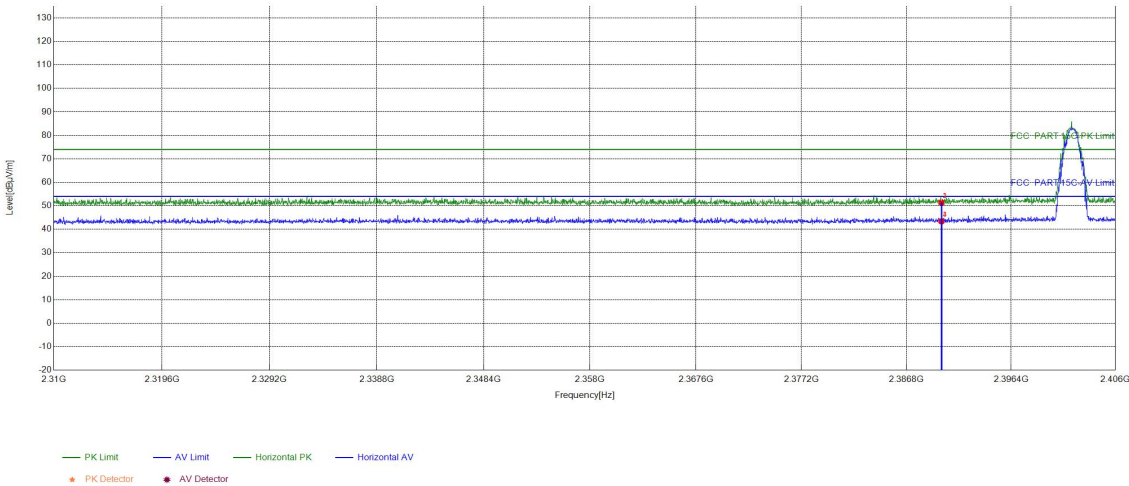

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.39	51.35	74.00	22.65	PASS	Horizontal	PK
2	2390	15.96	35.39	51.35	74.00	22.65	PASS	Horizontal	PK
3	2390	15.96	27.43	43.39	54.00	10.61	PASS	Horizontal	AV
4	2390	15.96	27.43	43.39	54.00	10.61	PASS	Horizontal	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2402Mhz
Remark:	\	Test_Date	2026/6/22


Test Graph

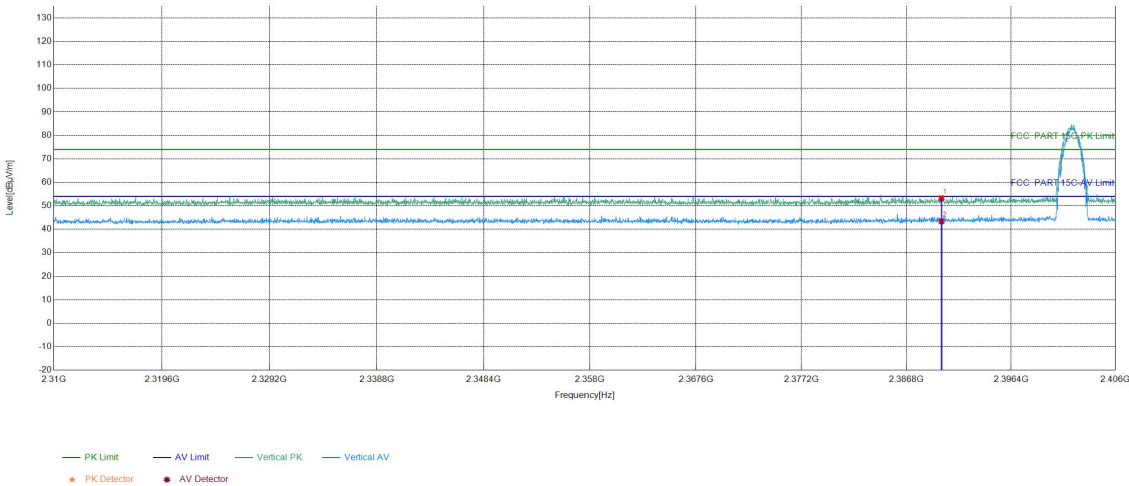

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	37.32	53.28	74.00	20.72	PASS	Vertical	PK
2	2390	15.96	27.41	43.37	54.00	10.63	PASS	Vertical	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2480Mhz
Remark:	\	Test_Date	2026/6/22


Test Graph

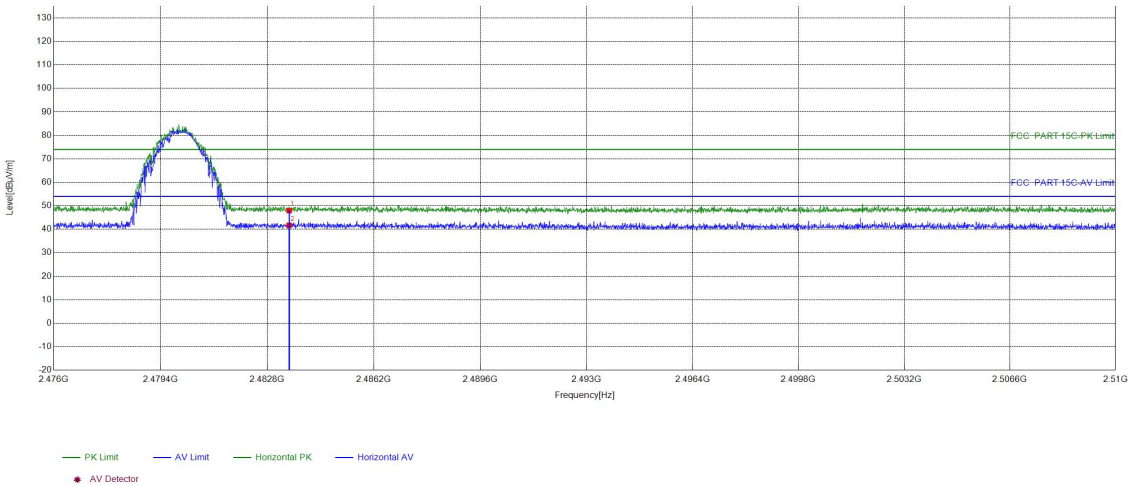

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	31.65	47.94	74.00	26.06	PASS	Horizontal	PK
2	2483.5	16.29	25.39	41.68	54.00	12.32	PASS	Horizontal	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2480Mhz
Remark:	\	Test_Date	2026/6/22


Test Graph

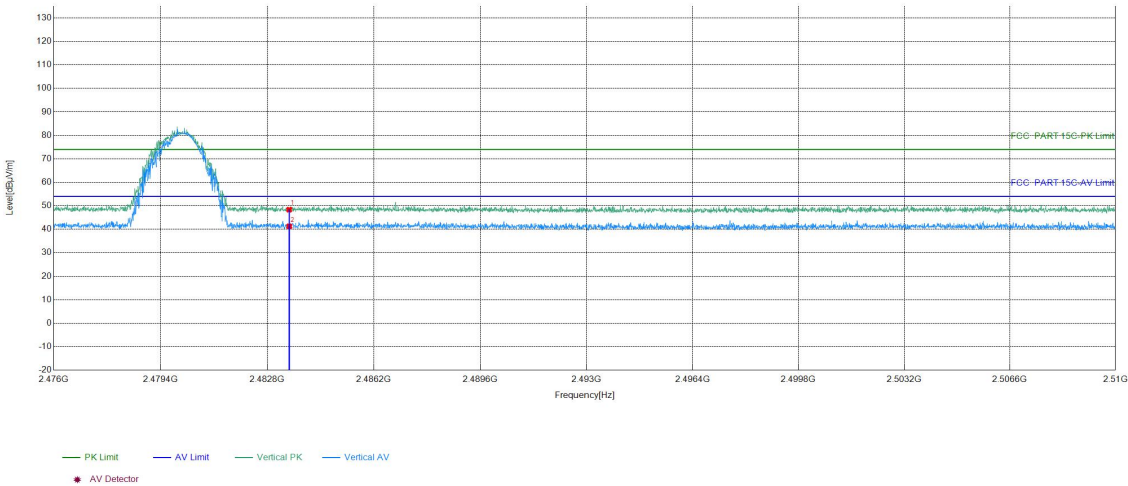

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	32.07	48.36	74.00	25.64	PASS	Vertical	PK
2	2483.5	16.29	24.96	41.25	54.00	12.75	PASS	Vertical	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2402Mhz
Remark:	\	Test_Date	2026/6/22


Test Graph

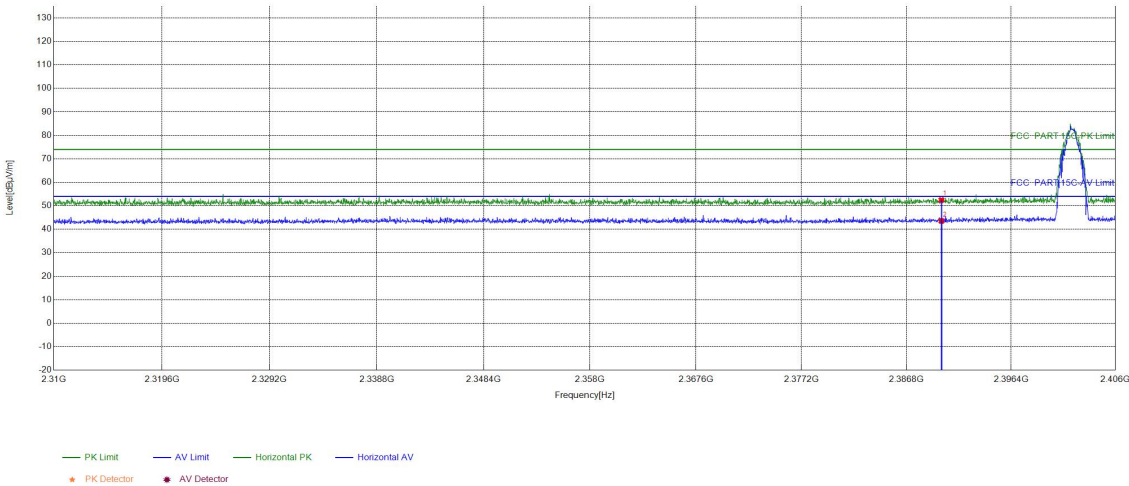

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.49	52.45	74.00	21.55	PASS	Horizontal	PK
2	2390	15.96	27.59	43.55	54.00	10.45	PASS	Horizontal	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2402Mhz
Remark:	\	Test_Date	2026/6/22


Test Graph

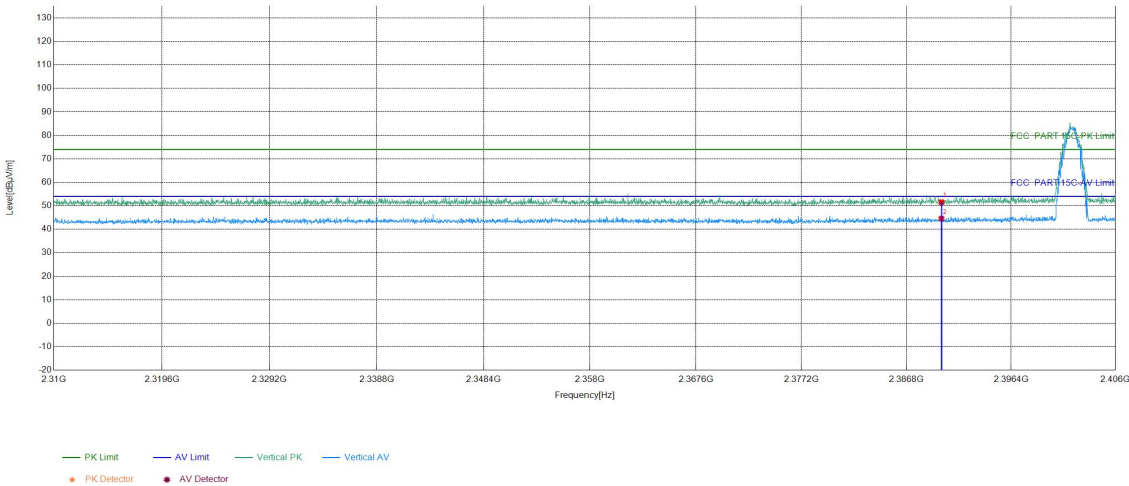

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.58	51.54	74.00	22.46	PASS	Vertical	PK
2	2390	15.96	28.55	44.51	54.00	9.49	PASS	Vertical	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2480Mhz
Remark:	\	Test_Date	2026/6/22


Test Graph

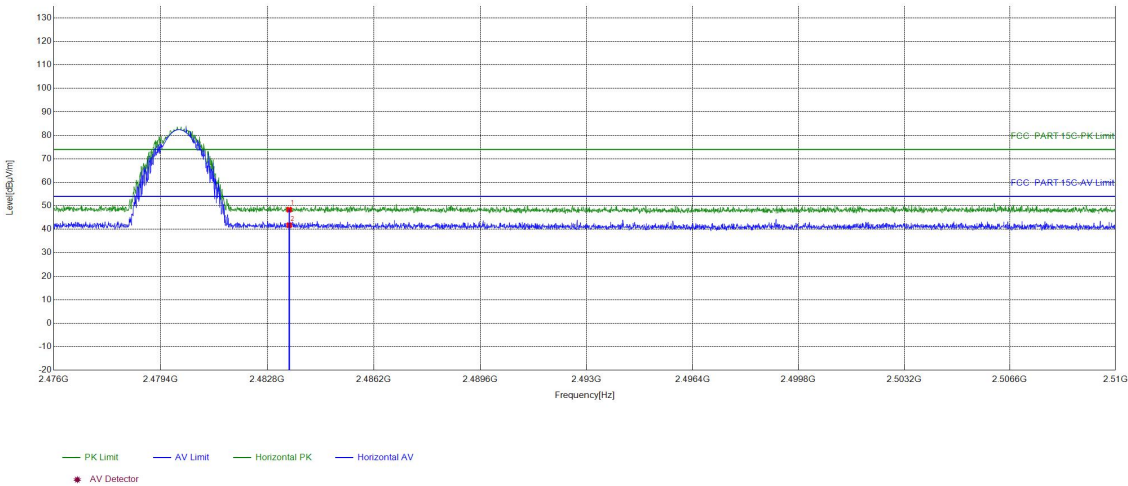

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	32.07	48.36	74.00	25.64	PASS	Horizontal	PK
2	2483.5	16.29	25.45	41.74	54.00	12.26	PASS	Horizontal	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2480Mhz
Remark:	\	Test_Date	2026/6/22

Test Graph

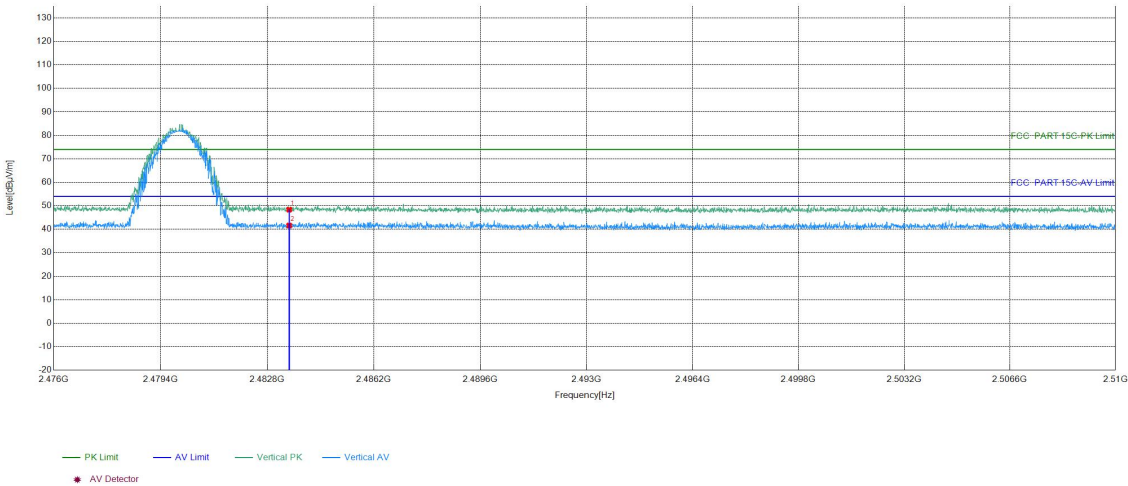

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	32.06	48.35	74.00	25.65	PASS	Vertical	PK
2	2483.5	16.29	25.31	41.60	54.00	12.40	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

5 Appendix A

Refer to Appendix: Bluetooth Classic of EED32S811111

6 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S811111.

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***