


Test_Mode	BLE 1M GFSK Transmitting	Test_Frequency	2480Mhz
Remark:	\	Test_Date	2026/6/22


Test Graph

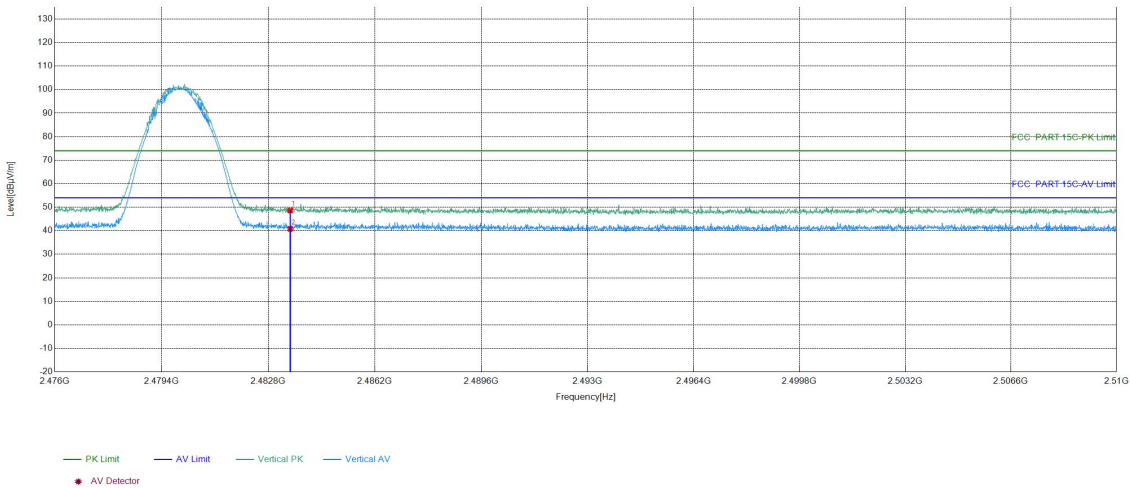

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	32.31	48.60	74.00	25.40	PASS	Vertical	PK
2	2483.5	16.29	24.50	40.79	54.00	13.21	PASS	Vertical	AV

Test_Mode	BLE 2M GFSK Transmitting	Test_Frequency	2402Mhz
Remark:	\	Test_Date	2026/6/22


Test Graph

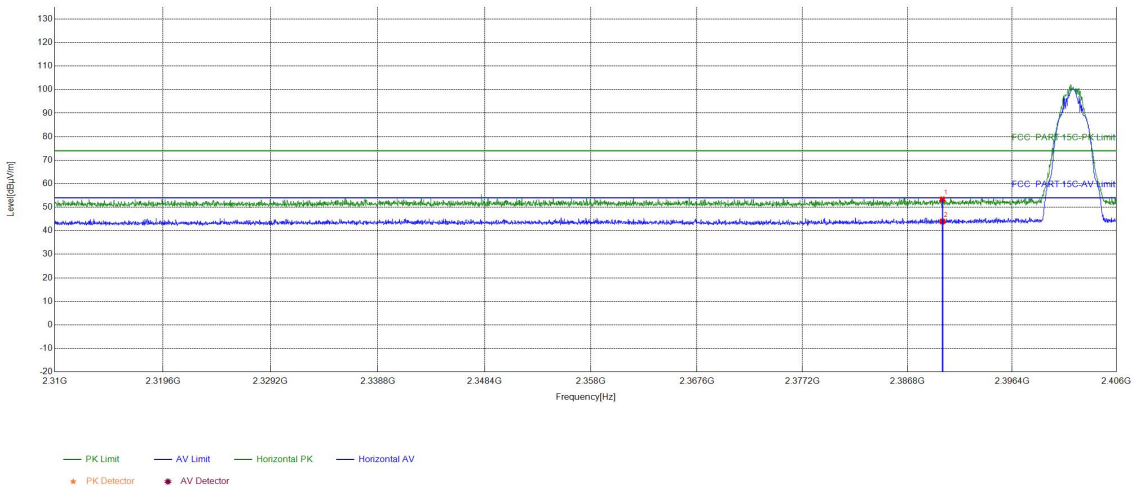

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	37.38	53.34	74.00	20.66	PASS	Horizont	PK
2	2390	15.96	27.98	43.94	54.00	10.06	PASS	Horizont	AV

Test_Mode	BLE 2M GFSK Transmitting	Test_Frequency	2402Mhz
Remark:	\	Test_Date	2026/6/22


Test Graph

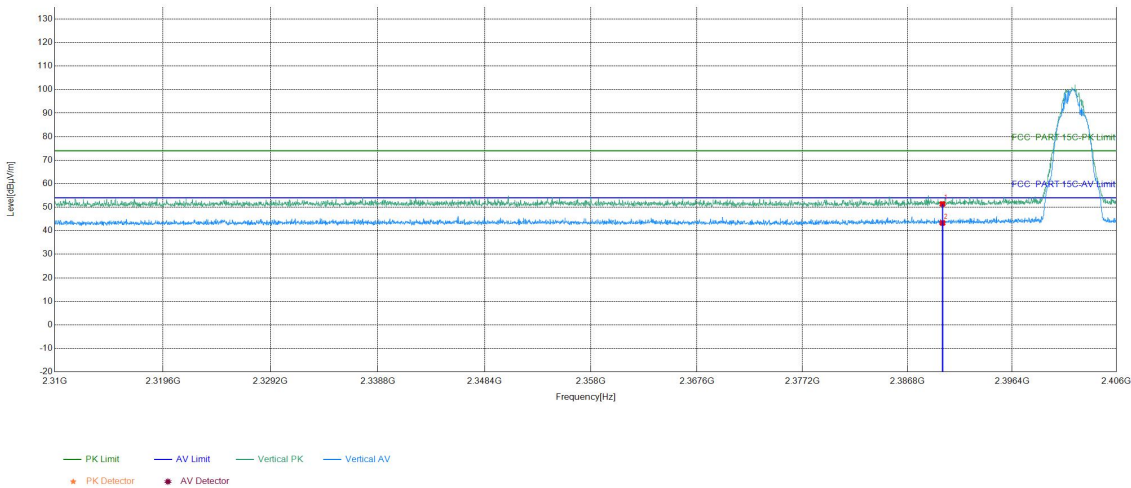

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.42	51.38	74.00	22.62	PASS	Vertical	PK
2	2390	15.96	27.35	43.31	54.00	10.69	PASS	Vertical	AV

Test_Mode	BLE 2M GFSK Transmitting	Test_Frequency	2480Mhz
Remark:	\	Test_Date	2026/6/22


Test Graph

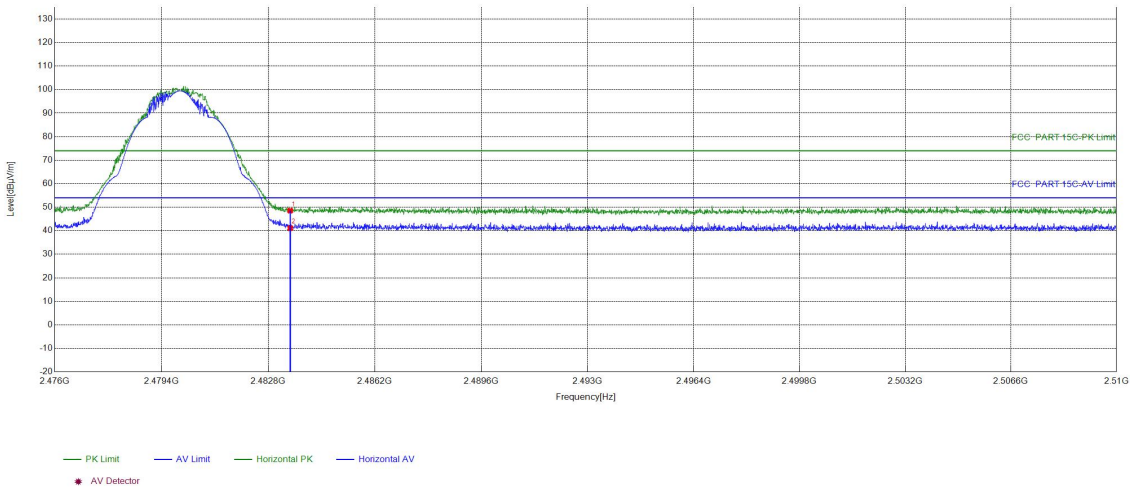

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	32.26	48.55	74.00	25.45	PASS	Horizont	PK
2	2483.5	16.29	24.82	41.11	54.00	12.89	PASS	Horizont	AV

Test_Mode	BLE 2M GFSK Transmitting	Test_Frequency	2480Mhz
Remark:	\	Test_Date	2026/6/22

Test Graph

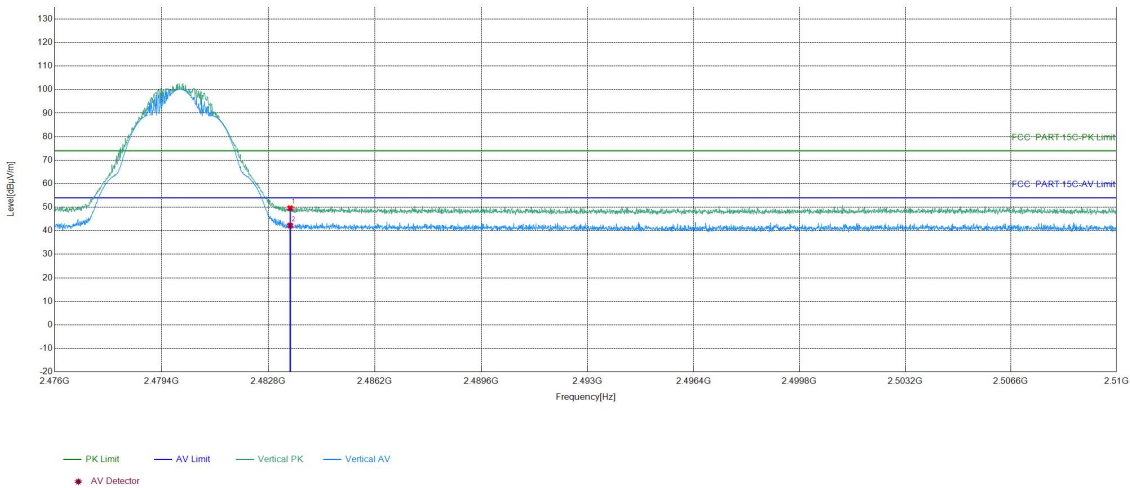

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	33.28	49.57	74.00	24.43	PASS	Vertical	PK
2	2483.5	16.29	25.91	42.20	54.00	11.80	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading -Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

6 Appendix A

Refer to Appendix: Bluetooth LE of EED32S811112

7 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S811111.

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***