

TEST REPORT

Product	: Tablet PC
Trade mark	: ALLDOCUBE
Model/Type reference	: See Clause 3.2
Serial Number	: N/A
Report Number	: EED32S811114
FCC ID	: 2A3J2-CUL3JT-1
Date of Issue	: Jul. 09, 2026
Test Standards	: 47 CFR Part 15 Subpart E
Test result	: PASS

Prepared for:

Shenzhen Alldocube Science and Technology Co., Ltd.
Room 2802,Building A, Longhua District Digital Innovation Center
(HOROI North Station Center), Beizhan Community, Minzhi Street,
Longhua District, Shenzhen City

Prepared by:

Centre Testing International Group Co., Ltd.
Building C, Hongwei Industrial Park Block 70, Bao'an District,
Shenzhen, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385



Compiled by:

Win Wei

Win Wei

Approved by:

Aaron Ma

Aaron Ma

Reviewed by:

Keven Tan

Keven Tan

Date:

Jul. 09, 2026

Check No.:6746200526

1 Content

1 CONTENT2

2 TEST SUMMARY3

3 GENERAL INFORMATION4

 3.1 CLIENT INFORMATION4

 3.2 GENERAL DESCRIPTION OF EUT4

 3.3 TEST ENVIRONMENT7

 3.4 DESCRIPTION OF SUPPORT UNITS8

 3.5 TEST LOCATION8

 3.6 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....8

4 EQUIPMENT LIST9

5 RADIO TECHNICAL REQUIREMENTS SPECIFICATION.....13

 5.1 ANTENNA REQUIREMENT13

 5.2 AC POWER LINE CONDUCTED EMISSIONS14

 5.3 MAXIMUM CONDUCTED OUTPUT POWER18

 5.4 6dB EMISSION BANDWIDTH19

 5.5 26dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....20

 5.6 MAXIMUM POWER SPECTRAL DENSITY21

 5.7 FREQUENCY STABILITY22

 5.8 RADIATED EMISSION23

 5.9 RADIATED EMISSION WHICH FALL IN THE RESTRICTED BANDS.....137

6 APPENDIX A250

7 PHOTOGRAPHS.....251

2 Test Summary

Test Item	Test Requirement	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart E Section 15.407 (b)(6)	PASS
Duty Cycle	47 CFR Part 15 Subpart E Section 15.407	PASS
Maximum Conducted Output Power	47 CFR Part 15 Subpart E Section 15.407 (a)	PASS
26dB Emission Bandwidth	47 CFR Part 15 Subpart E Section 15.407 (a)	PASS
99% Occupied Bandwidth	\	PASS
6dB Emission Bandwidth	47 CFR Part 15 Subpart E Section 15.407 (e)	PASS
Maximum Power Spectral Density	47 CFR Part 15 Subpart E Section 15.407 (a)	PASS
Frequency stability	47 CFR Part 15 Subpart E Section 15.407 (g)	PASS
Radiated Emissions	47 CFR Part 15 Subpart E Section 15.407 (b)	PASS
Radiated Emissions which fall in the restricted bands	47 CFR Part 15 Subpart E Section 15.407 (b)	PASS

3 General Information

3.1 Client Information

Applicant:	Shenzhen Alldocube Science and Technology Co., Ltd.
Address of Applicant:	Room 2802,Building A, Longhua District Digital Innovation Center (HOROY North Station Center), Beizhan Community, Minzhi Street, Longhua District, Shenzhen City
Manufacturer:	Shenzhen Alldocube Science and Technology Co., Ltd.
Address of Manufacturer:	Room 2802,Building A, Longhua District Digital Innovation Center (HOROY North Station Center), Beizhan Community, Minzhi Street, Longhua District, Shenzhen City
Factory:	Guangdong Alldocube Science and Technology Co., Ltd.
Address of Factory:	Floors 4-8, Building 3, No.5 Xiangjun Street, Wangqingsha Town, Nansha District, Guangzhou, China

3.2 General Description of EUT

Product Name:	Tablet PC
Model No.:	U1053, CUL3JT, T1009, T1030, T1031, T1033, T1035, T1036, T1037, T1038,T1039, T1051, T1052, T1053, T1055, T1056, T1057, T1058, T1059, T1101, T1102, T1103, T1105, T1107, T1108, T1150, T1151, T1152, T1153, T1154, T1155, T1156, T1157, T1158, T1159, T1160, T1161, T1161S, T1161P, T1162,T1163, T1165, T1166, T1167, T1168, T1169, T1170, T1171, T1172, T1173, T1174, T1175, T1176, T1177, T1178, T1179, T1180, T1181, T1182, T1183, T1184, T1185, T1186, T1187, T1188, T1189, U1008, U1009, U1011, U1012, U1013, U1015, U1053, U1055, U1056, U1057, U1058, U1059, U1030, U1032, U1033, U1035, U1036, U1037, U1038, U1039, U1101, U1102, U1103, U1105, U1107, U1108, U1109, U1180, U1181, U1182, U1183, U1184,U1185, U1186, U1187, U1188, U1189, i1022, i1023, i1025, i1026, i1027, i1028, i1029, i1115, i1116, i1117, i1118, i1119; ALDS2WT, T1201, T1202, T1203, T1205, T1206, T1207, T1208, T1209, T1250, T1251, T1252, T1253, T1255, T1256, T1257, T1258, T1259, T1260, T1261, T1262, T1263, T1265, T1266, T1267, T1268, T1269, T1270, T1271, T1272, T1273, T1274, T1275, T1276, T1277, T1278, T1279, T1301, T1302, T1303, T1305, T1306, T1307, T1308, T1309, T1360, T1361, T1362, T1363, T1364, T1365, T1366, T1367, T1368, T1369, T1370, T1371, T1372, T1373, T1374, T1375, T1376, T1377, T1378, T1379, T1381, T1382, T1383, T1384, T1385, T1386, T1387, T1388, T1389, T1401, T1402, T1403, T1405, T1406, T1407, T1408, T1409, T1460, T1461, T1462, T1463, T1465, T1466, T1467, T1468, T1469, T1560, T1561, T1562, T1563, T1565, T1566, T1567, T1568, T1569, i1211, i1212, i1213, i1215, i1216, i1217, i1218, i1219, i1301, i1302, i1303, i1305, i1306, i1307, i1308, i1309, i1310, i1311, i1312, i1313, i1314, i1315, i1316, i1317, i1318, i1319, i1401, i1402, i1403, i1405, i1406, i1407, i1408, i1409, i1501, i1502, i1503, i1505, i1506, i1507, U1380, U1381, U1382, U1383, U1385, U1386, U1387, U1388, U1389, U1460, U1461, U1470, U1471, U1480
Test Model No.:	U1053
Model difference:	They have same electrical, PCB and layout, only the model names and

	color are different for marketing requirements.	
Trade mark:	ALLDOCUBE	
EUT Function:	☐ Outdoor AP ☐ Indoor AP ☐ Fixed P2P AP ☒ Indoor	
Type of Modulation:	IEEE 802.11a: OFDM (BPSK, QPSK, 16QAM, 64QAM) IEEE 802.11n(HT20/HT40): OFDM (BPSK, QPSK, 16QAM, 64QAM) IEEE 802.11ac(VHT20/VHT40/VHT80): OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)	
Operating Frequency	U-NII-1 & U-NII-2A: 5150-5350MHz U-NII-2C:5500-5700MHz U-NII-3:5745-5825MHz	
Weather Band	☒ With 5600-5650MHz ☐ Without 5600-5650MHz	
DFS (Dynamic Frequency Selection) Operational mode:	☐ Master ☒ Slaver without radar detection ☐ Slaver with radar detection	
TPC Function	☐ With TPC Function ☒ Without TPC Function	
Antenna Configuration:	☒ Single Transmitting; ☐ MIMO (☐ 2T2R, ☐ 3T3R, ☐ 4T4R, ☐ Other);	
Antenna Type:	FPC Antenna	
Antenna Gain:	Sub-band 1: 1.13dBi Sub-band 2: 1.20dBi Sub-band 3: 1.13dBi Sub-band 4: 0.91dBi	
Power Supply:	Adapter:	Input: AC 100-240V~50/60Hz 0.5A Output: DC 5V 2A
	Battery:	DC3.88V
Test voltage:	DC 5V	
Sample Received Date:	May 28, 2026	
Sample tested Date:	May 28, 2026 to Jun. 26, 2026	

Operation Frequency each of channel

802.11a/802.11n/802.11ac(20MHz) Frequency/Channel Operations:

U-NII-1		U-NII-2A		U-NII-2C		U-NII-3	
Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
36	5180	52	5260	100	5500	149	5745
40	5200	56	5280	104	5520	153	5765
44	5220	60	5300	108	5540	157	5785
48	5240	64	5320	112	5560	161	5805
-	-	-	-	116	5580	165	5825
-	-	-	-	120	5600	-	-
-	-	-	-	124	5620	-	-
-	-	-	-	128	5640	-	-
-	-	-	-	132	5660	-	-
-	-	-	-	136	5680	-	-
-	-	-	-	140	5700	-	-
-	-	-	-	-	-	-	-

802.11n/802.11ac(40MHz) Frequency/Channel Operations:

U-NII-1		U-NII-2A		U-NII-2C		U-NII-3	
Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
38	5190	54	5270	102	5510	151	5755
46	5230	62	5310	110	5550	159	5795
-	-	-	-	118	5590	-	-
-	-	-	-	126	5630	-	-
-	-	-	-	134	5670	-	-
-	-	-	-	-	-	-	-

802.11ac(80MHz) Frequency/Channel Operations:

U-NII-1		U-NII-2A		U-NII-2C		U-NII-3	
Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
42	5210	58	5290	106	5530	155	5775
-	-	-	-	122	5610	-	-
-	-	-	-	-	-	-	-

Test Configuration

EUT Test Software Settings:	
Software:	N/A
EUT Power Grade:	Default
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.	
Test Mode:	
We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.	
Mode	Data rate
802.11a	6 Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0
802.11ac(VHT20)	MCS0
802.11ac(VHT40)	MCS0
802.11ac(VHT80)	MCS0

3.3 Test Environment

Operating Environment:		
Radiated Spurious Emissions:		
Temperature:	22~25.0 °C	
Humidity:	50~55 % RH	
Atmospheric Pressure:	1010mbar	
Conducted Emissions:		
Temperature:	22~25.0 °C	
Humidity:	50~55 % RH	
Atmospheric Pressure:	1010mbar	
RF Conducted:		
Humidity:	50~55 % RH	
Atmospheric Pressure:	1010mbar	
Temperature:	NT (Normal Temperature)	22~25.0 °C
	LT (Low Temperature)	-5 °C

	HT (High Temperature)	50 °C
Working Voltage of the EUT:	NV (Normal Voltage)	5 V
	LV (Low Voltage)	3.88 V
	HV (High Voltage)	5.5 V

3.4 Description of Support Units

The EUT has been tested independently.

3.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164, Test Firm Registration No.: 260439

3.6 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-40GHz)
3	Radiated Spurious emission test	3.3dB (9kHz-30MHz)
		4.5dB (30MHz-1GHz)
		4.8dB (1GHz-18GHz)
		3.4dB (18GHz-40GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

4 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	11-25-2025	11-24-2026
Spectrum Analyzer	R&S	FSVS3044	101509	05-14-2026	05-13-2027
Spectrum Analyzer	R&S	FSW43	102978	08-11-2025	08-10-2026
Signal Generator	Keysight	N5182B	MY53051549	11-13-2025	11-12-2026
Signal Generator	Agilent	N5181A	MY46240094	11-25-2025	11-24-2026
DC Power	Keysight	E3642A	MY56376072	11-13-2025	11-12-2026
Communication test set	R&S	CMW500	169004	02-06-2026	02-05-2027
RF control unit(power unit)	JS Tonscend	JS0806-2	24I80620925	07-21-2025	07-20-2026
Wi-Fi 7GHz Band Extender	JS Tonscend	TS-WF7U2	2206200002	05-09-2026	05-08-2027
high-low temperature test chamber	Dong Guang Qin Zhuo	LK-80GA	QZ20150611879	11-13-2025	11-12-2026
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	05-22-2026	05-21-2027
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	V3.6.21	---	---
Digital multimeter	FLUKE	17B MAX	59545050WS	10-15-2025	10-14-2026

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Fully Anechoic Chamber	TDK	FAC-3	---	01-29-2024	01-28-2027
Receiver	Keysight	N9038A	MY57290136	12-22-2025	12-21-2026
Spectrum Analyzer	Keysight	N9020B	MY57111112	12-21-2025	12-20-2026
Spectrum Analyzer	Keysight	N9030B	MY57140871	12-21-2025	12-20-2026
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	03-29-2026	03-28-2027
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-03-2026	04-02-2027
Horn Antenna	ETS-LINDGREN	3117	57407	05-10-2026	05-09-2027
Preamplifier	EMCI	EMC001330	980563	02-06-2026	02-05-2027
Preamplifier	EMCI	EMC051845SE	980380	11-25-2025	11-24-2026
Preamplifier	Tonscend	TAP-011858	AP21B806112	07-07-2025	07-06-2026
Communication test set	R&S	CMW500	104466	11-25-2025	11-24-2026
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	03-24-2026	03-23-2027
RSE Automatic test software	JS Tonscend	JS36-RSE	V5.0.0.1	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	01-29-2024	01-28-2027
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	01-29-2024	01-28-2027
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	01-29-2024	01-28-2027
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	01-29-2024	01-28-2027
Cable line	Times	EMC104-NMNM-1000	SN160710	01-29-2024	01-28-2027
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	01-29-2024	01-28-2027
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	01-29-2024	01-28-2027
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	01-29-2024	01-28-2027
Cable line	Times	HF160-KMKM-3.00M	393493-0001	01-29-2024	01-28-2027

3M Semi-anechoic Chamber (2)- Radiated disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
				(mm-dd-yyyy)	(mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	01/13/2024	01/12/2027
Receiver	R&S	ESCI7	100938-003	09/03/2025	09/02/2026
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	9163-618	05/11/2026	05/10/2027
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	03/29/2026	03/28/2027
Microwave Preamplifier	Tonscend	EMC051845SE	980380	11/25/2025	11/24/2026
Horn Antenna	A.H.SYSTEMS	SAS-574	374	07/02/2023	07/01/2026
Horn Antenna	ETS-LINGREN	BBHA 9120D	9120D-1869	03/31/2026	03/30/2027
Preamplifier	Agilent	11909A	12-1	02/06/2026	02/05/2027
Preamplifier	CD	PAP-1840-60	6041.6042	05/16/2026	05/15/2027
Test software	Fara	EZ-EMC	EMEC-3A1-Pre	---	---
Cable line	Fulai(7M)	SF106	5219/6A	01/13/2024	01/12/2027
Cable line	Fulai(6M)	SF106	5220/6A	01/13/2024	01/12/2027
Cable line	Fulai(3M)	SF106	5216/6A	01/13/2024	01/12/2027
Cable line	Fulai(3M)	SF106	5217/6A	01/13/2024	01/12/2027

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
				(mm-dd-yyyy)	(mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-07-2026	04-06-2027
Temperature/ Humidity Indicator	Defu	TH128	/	03-24-2026	03-23-2027
LISN	R&S	ENV216	100098	09-13-2025	09-12-2026
Barometer	changchun	DYM3	1188	---	---
Test software	Fara	EZ-EMC	EMC-CON 3A1.1	---	---
Capacitive voltage probe	Schwarzbeck	CVP 9222C	00124	06-07-2025 06-10-2026	06-06-2026 06-09-2027
ISN	TESEQ	ISN T800	30297	11-24-2025	11-23-2026


错误!未找到引用源。

5 Radio Technical Requirements Specification

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	Please see Internal photos
The antenna is FPC Antenna. The best case gain of the antenna Sub-band 1 is 1.13dBi, The best case gain of the antenna Sub-band 2 is 1.20dBi, The best case gain of the antenna Sub-band 3 is 1.13dBi, The best case gain of the antenna Sub-band 4 is 0.87dBi.	


5.2 AC Power Line Conducted Emissions

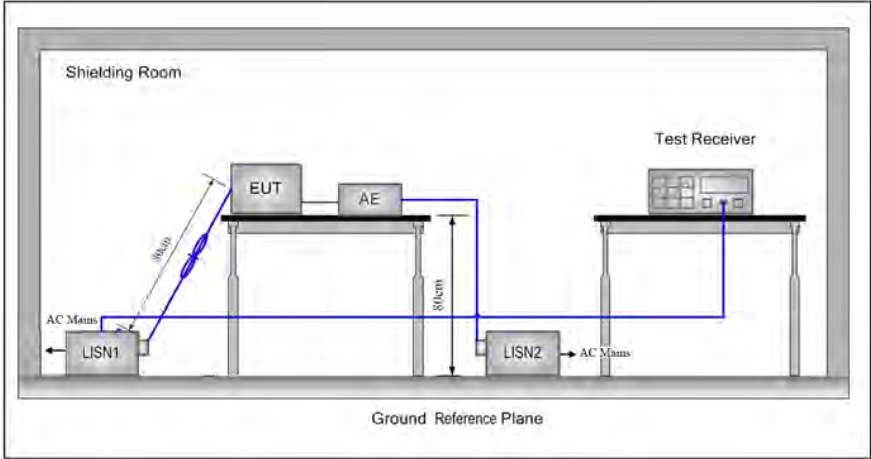Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10-2020		
Test Frequency Range:	150kHz to 30MHz		
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Setup:			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10-2020 on conducted measurement.		

Test Mode:	All modes were tested, only the worst case was recorded in the report.
Test Results:	Pass

Measurement Data

Live line:

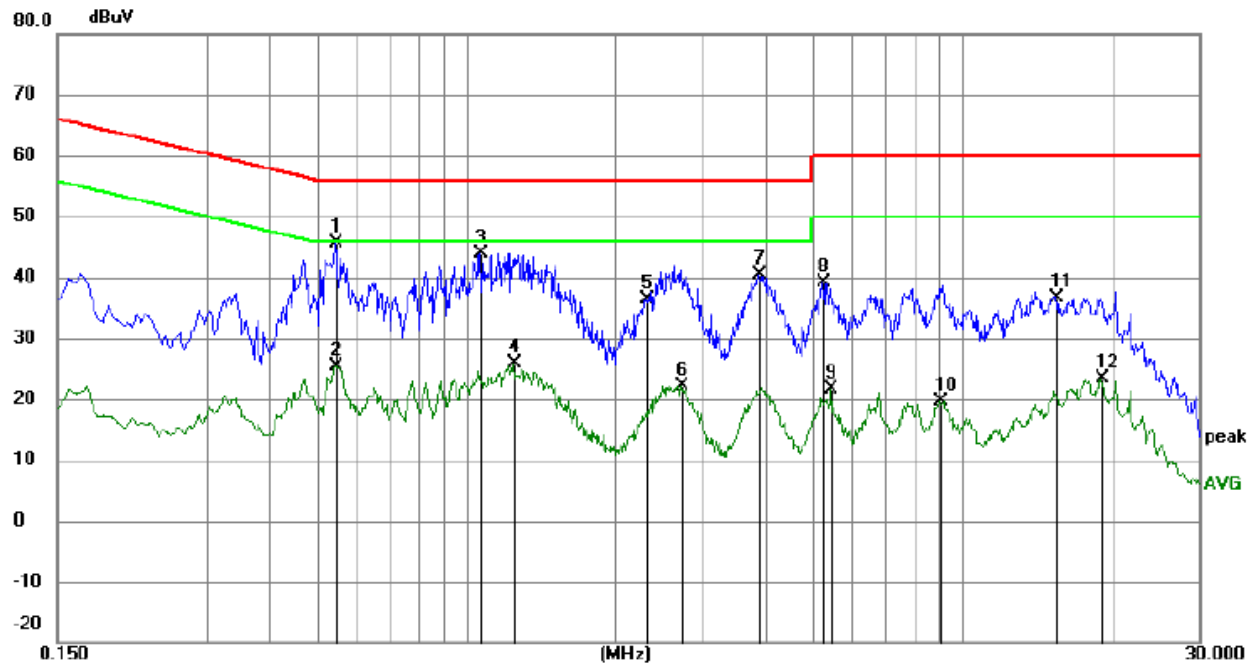


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.5460	35.51	10.09	45.60	56.00	-10.40	QP	
2		0.5460	15.23	10.09	25.32	46.00	-20.68	AVG	
3		1.0680	33.81	10.18	43.99	56.00	-12.01	QP	
4		1.2480	15.72	10.18	25.90	46.00	-20.10	AVG	
5		2.3055	26.29	10.16	36.45	56.00	-19.55	QP	
6		2.7195	12.07	10.14	22.21	46.00	-23.79	AVG	
7		3.8940	30.20	10.10	40.30	56.00	-15.70	QP	
8		5.2395	29.17	10.06	39.23	60.00	-20.77	QP	
9		5.4330	11.53	10.05	21.58	50.00	-28.42	AVG	
10		9.0285	9.72	9.98	19.70	50.00	-30.30	AVG	
11		15.4590	26.90	9.85	36.75	60.00	-23.25	QP	
12		19.0230	13.47	9.81	23.28	50.00	-26.72	AVG	

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. Margin = Measurement - Limit.
4. Measurement = Reading Level + Correct Factor.
5. In the test results, an asterisk (*) indicates Maximum Data, a cross (X) indicates over Limit.
6. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

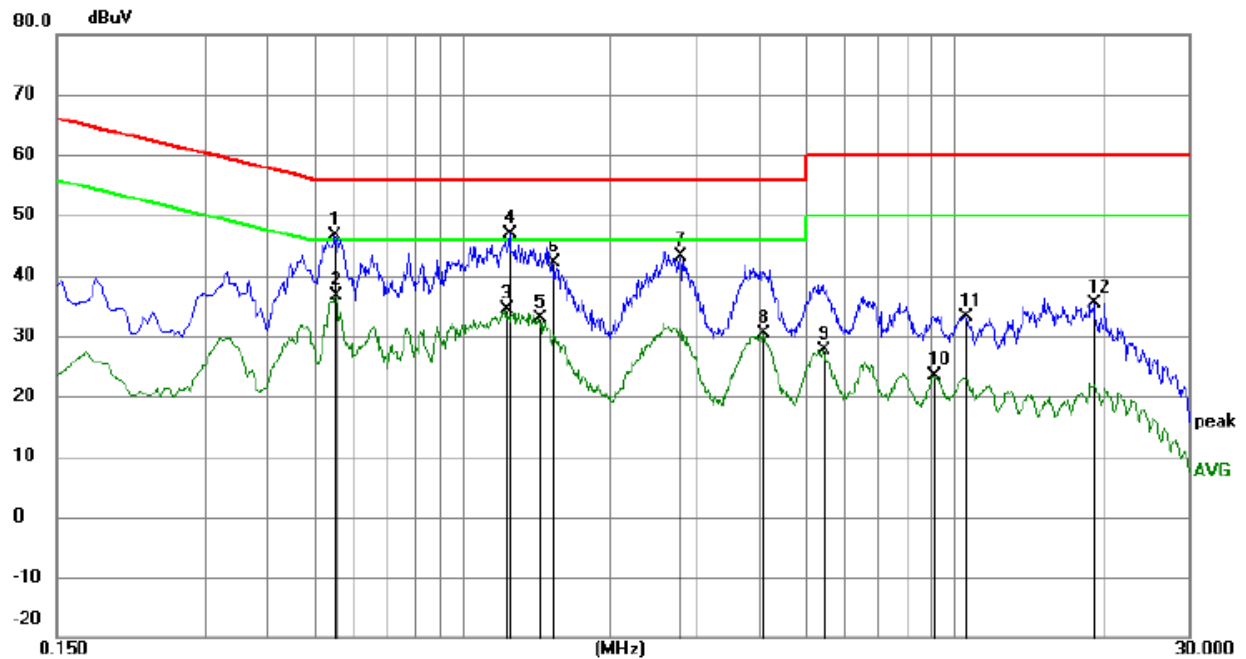


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.5505	36.50	10.09	46.59	56.00	-9.41	QP	
2		0.5550	26.60	10.09	36.69	46.00	-9.31	AVG	
3		1.2345	24.28	10.18	34.46	46.00	-11.54	AVG	
4	*	1.2525	36.58	10.18	46.76	56.00	-9.24	QP	
5		1.4370	22.63	10.18	32.81	46.00	-13.19	AVG	
6		1.5315	31.94	10.17	42.11	56.00	-13.89	QP	
7		2.7690	32.89	10.14	43.03	56.00	-12.97	QP	
8		4.0920	20.27	10.09	30.36	46.00	-15.64	AVG	
9		5.4240	17.58	10.05	27.63	50.00	-22.37	AVG	
10		9.0960	13.36	9.97	23.33	50.00	-26.67	AVG	
11		10.5090	23.21	9.94	33.15	60.00	-26.85	QP	
12		19.2480	25.62	9.81	35.43	60.00	-24.57	QP	


Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. Margin = Measurement - Limit.
4. Measurement = Reading Level + Correct Factor.
5. In the test results, an asterisk (*) indicates Maximum Data, a cross (X) indicates over Limit.
6. If the Peak value under Average limit, the Average value is not recorded in the report.


5.3 Maximum Conducted Output Power

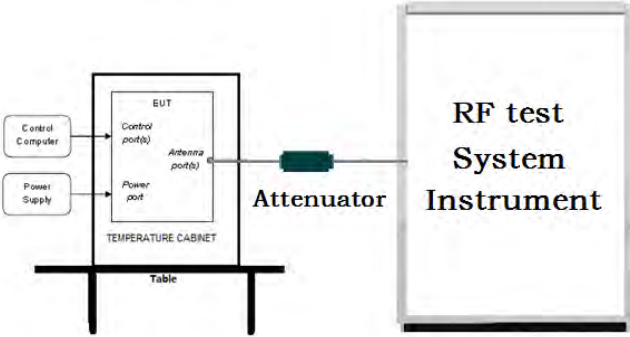Test Requirement:	47 CFR Part 15C Section 15.407 (a)													
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E													
Test Setup:														
Test Procedure:	1. The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E, 3, a 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Measure the conducted output power and record the results in the test report.													
Limit:	<table border="1"> <thead> <tr> <th>Frequency band (MHz)</th><th>Limit</th></tr> </thead> <tbody> <tr> <td rowspan="2">5150-5250</td><td>≤1W(30dBm) for master device</td></tr> <tr> <td>≤250mW(24dBm) for client device</td></tr> <tr> <td>5250-5350</td><td>≤250mW(24dBm) for client device or 11dBm+10logB*</td></tr> <tr> <td>5470-5725</td><td>≤250mW(24dBm) for client device or 11dBm+10logB*</td></tr> <tr> <td>5725-5850</td><td>≤1W(30dBm)</td></tr> <tr> <td>Remark:</td><td>* Where B is the 26dB emission bandwidth in MHz The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.</td></tr> </tbody> </table>	Frequency band (MHz)	Limit	5150-5250	≤1W(30dBm) for master device	≤250mW(24dBm) for client device	5250-5350	≤250mW(24dBm) for client device or 11dBm+10logB*	5470-5725	≤250mW(24dBm) for client device or 11dBm+10logB*	5725-5850	≤1W(30dBm)	Remark:	* Where B is the 26dB emission bandwidth in MHz The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.
Frequency band (MHz)	Limit													
5150-5250	≤1W(30dBm) for master device													
	≤250mW(24dBm) for client device													
5250-5350	≤250mW(24dBm) for client device or 11dBm+10logB*													
5470-5725	≤250mW(24dBm) for client device or 11dBm+10logB*													
5725-5850	≤1W(30dBm)													
Remark:	* Where B is the 26dB emission bandwidth in MHz The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.													
Test Mode:	Transmitting mode with modulation													
Test Results:	Refer to Appendix A													


5.4 6dB Emission Bandwidth

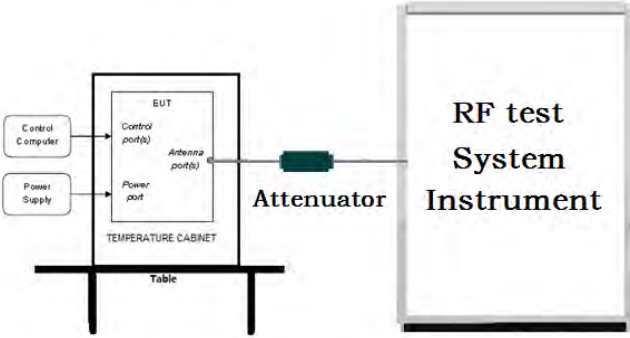Test Requirement:	47 CFR Part 15C Section 15.407 (e)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. 4. Measure and record the results in the test report.
Limit:	≥ 500 kHz
Test Mode:	Transmitting mode with modulation
Test Results:	Refer to Appendix A


5.5 26dB Emission Bandwidth and 99% Occupied Bandwidth

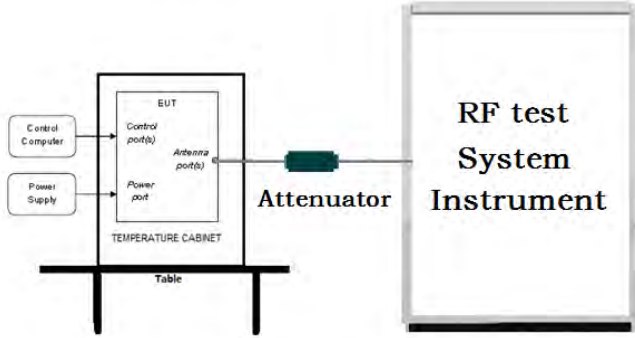Test Requirement:	47 CFR Part 15C Section 15.407 (a)
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C&D
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	For 26dB Occupied Bandwidth: 1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section D 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. 4. Measure and record the results in the test report. For 99% Occupied Bandwidth: 1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$. 4. Measure and record the results in the test report.
Limit:	No restriction limits
Test Mode:	Transmitting mode with modulation
Test Results:	Refer to Appendix A

5.6 Maximum Power Spectral Density

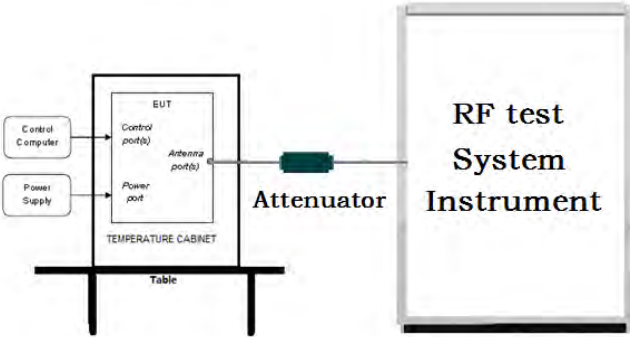
Test Requirement:	47 CFR Part 15C Section 15.407 (a)													
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section F													
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.													
Test Procedure:	1. Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth. 1. Set RBW = 510 kHz/1 MHz, VBW ≥ 3*RBW, Sweep time = Auto, Detector = RMS. 2. Allow the sweeps to continue until the trace stabilizes. 3. Use the peak marker function to determine the maximum amplitude level.													
Limit:	<table><tr><th>Frequency band (MHz)</th><th>Limit</th></tr><tr><td rowspan="2">5150-5250</td><td>≤17dBm in 1MHz for master device</td></tr><tr><td>≤11dBm in 1MHz for client device</td></tr><tr><td>5250-5350</td><td>≤11dBm in 1MHz for client device</td></tr><tr><td>5470-5725</td><td>≤11dBm in 1MHz for client device</td></tr><tr><td>5725-5850</td><td>≤30dBm in 500kHz</td></tr><tr><td>Remark:</td><td>The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.</td></tr></table>	Frequency band (MHz)	Limit	5150-5250	≤17dBm in 1MHz for master device	≤11dBm in 1MHz for client device	5250-5350	≤11dBm in 1MHz for client device	5470-5725	≤11dBm in 1MHz for client device	5725-5850	≤30dBm in 500kHz	Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.
Frequency band (MHz)	Limit													
5150-5250	≤17dBm in 1MHz for master device													
	≤11dBm in 1MHz for client device													
5250-5350	≤11dBm in 1MHz for client device													
5470-5725	≤11dBm in 1MHz for client device													
5725-5850	≤30dBm in 500kHz													
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.													
Test Mode:	Transmitting mode with modulation													
Test Results:	Refer to Appendix A													

5.7 Frequency Stability

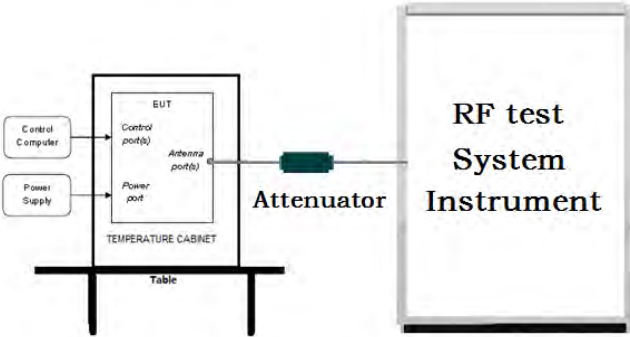Test Requirement:	47 CFR Part 15C Section 15.407 (g)
Test Method:	ANSI C63.10-2020
Test Setup:	 Remark: Offset=Cable loss+ attenuation factor.
Test Procedure:	1.The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. 2. Turn the EUT on and couple its output to a spectrum analyzer. 3. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. 4. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. 5. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
Limit:	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 45 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
Test Mode:	Transmitting mode with modulation
Test Results:	Refer to Appendix A

5.8 Radiated Emission

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.407 (b)										
Test Method:	ANSI C63.10-2020										
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)										
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark						
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak						
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average						
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak						
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak						
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average						
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak						
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak						
	Above 1GHz	Peak	1MHz	3MHz	Peak						
Peak		1MHz	10kHz	Average							
Limit:	(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (4) For transmitters operating in the 5.725-5.85 GHz band: (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.										
	<table><tr><td>EIRP(dBm)</td><td>Field Strength at 3m (dBμV/m)</td></tr><tr><td>-27(RMS)</td><td>68.2</td></tr><tr><td>-7(Peak)</td><td>88.2</td></tr></table>					EIRP(dBm)	Field Strength at 3m (dBμV/m)	-27(RMS)	68.2	-7(Peak)	88.2
	EIRP(dBm)	Field Strength at 3m (dBμV/m)									
	-27(RMS)	68.2									
	-7(Peak)	88.2									
	Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:										
	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)						
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300						
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30						
	1.705MHz-30MHz	30	-	-	30						
30MHz-88MHz	100	40.0	Quasi-peak	3							
88MHz-216MHz	150	43.5	Quasi-peak	3							

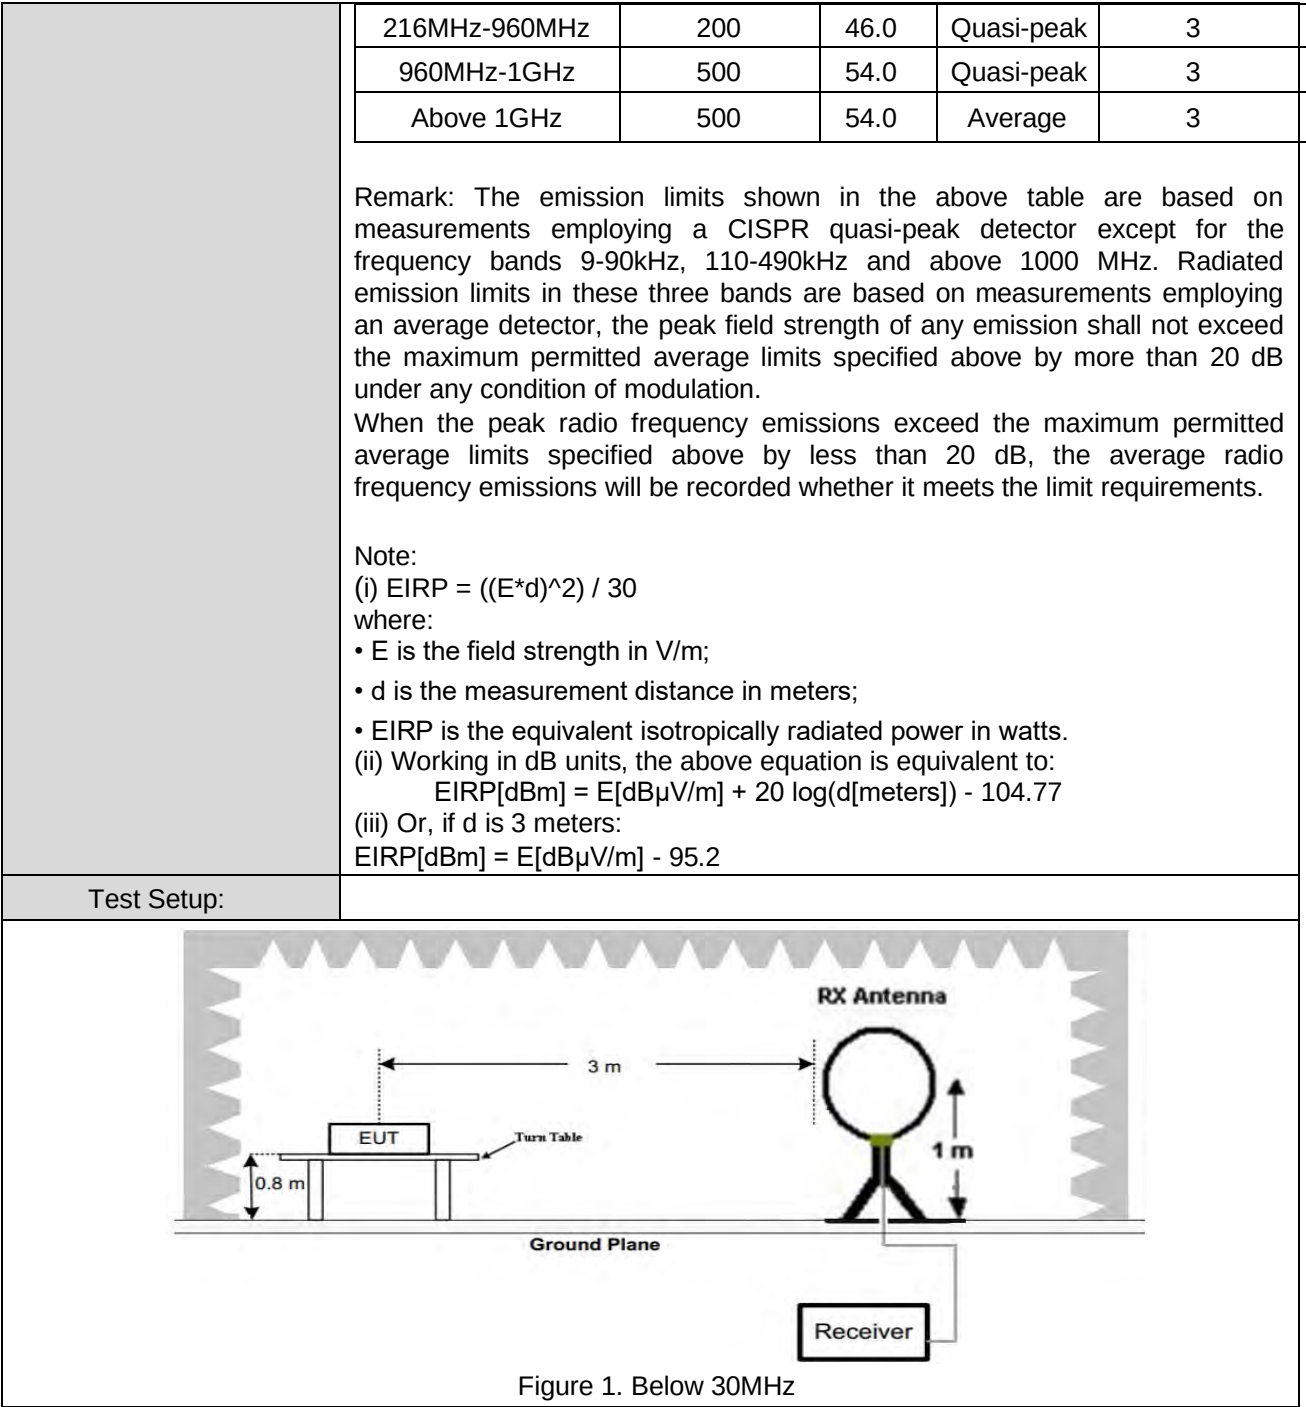

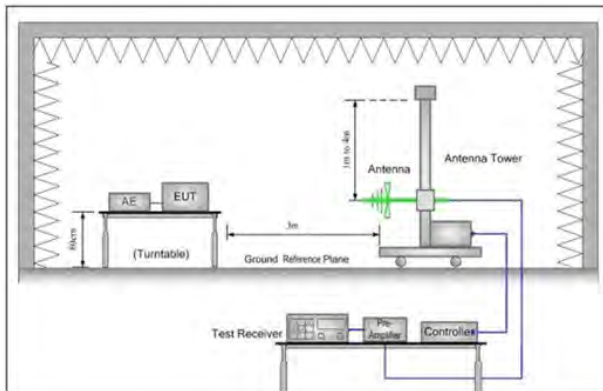


Figure 2. 30MHz to 1GHz

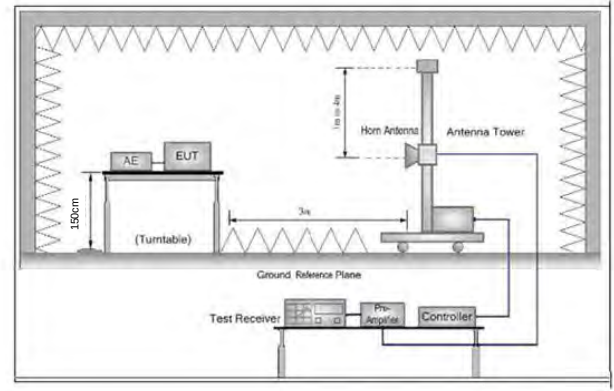


Figure 3. Above 1 GHz

Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 Note: For the radiated emission test above 1GHz:
 Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel and the highest


	channel h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete.
Test Mode:	Transmitting mode with modulation
Test Results:	Pass

Radiated Spurious Emissions test Data: Radiated Emission below 1GHz

Remark: During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes, only the worst case middle channel of 6Mbps for 802.11a was recorded in the report.

Test Graph

Horizontal:

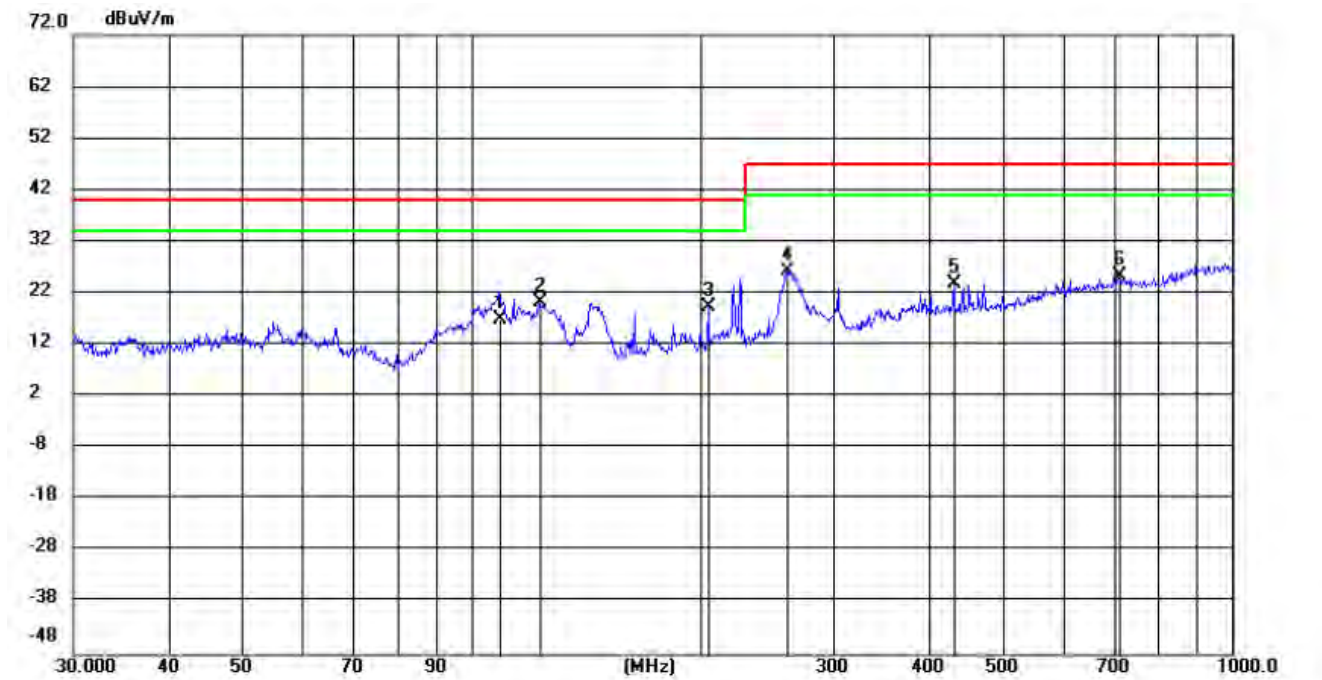


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		108.7995	2.87	14.03	16.90	40.00	-23.10	QP	100	353	
2	*	123.1358	8.96	11.28	20.24	40.00	-19.76	QP	100	14	
3		205.1348	6.60	12.76	19.36	40.00	-20.64	QP	100	56	
4		259.7342	11.37	15.02	26.39	47.00	-20.61	QP	100	142	
5		431.7122	4.00	19.75	23.75	47.00	-23.25	QP	100	91	
6		709.6798	1.22	24.10	25.32	47.00	-21.68	QP	100	116	

Remark:

1. $\text{Margin} = \text{Measurement}(\text{Level}) - \text{Limit}$.
2. $\text{Measurement}(\text{Level}) = \text{Reading Level} + \text{Correct Factor}$.
3. In the test results, an asterisk (*) indicates Maximum Data, a cross (X) indicates over Limit, an exclamation mark (!) indicates over -6dB margin Limit.

Vertical:

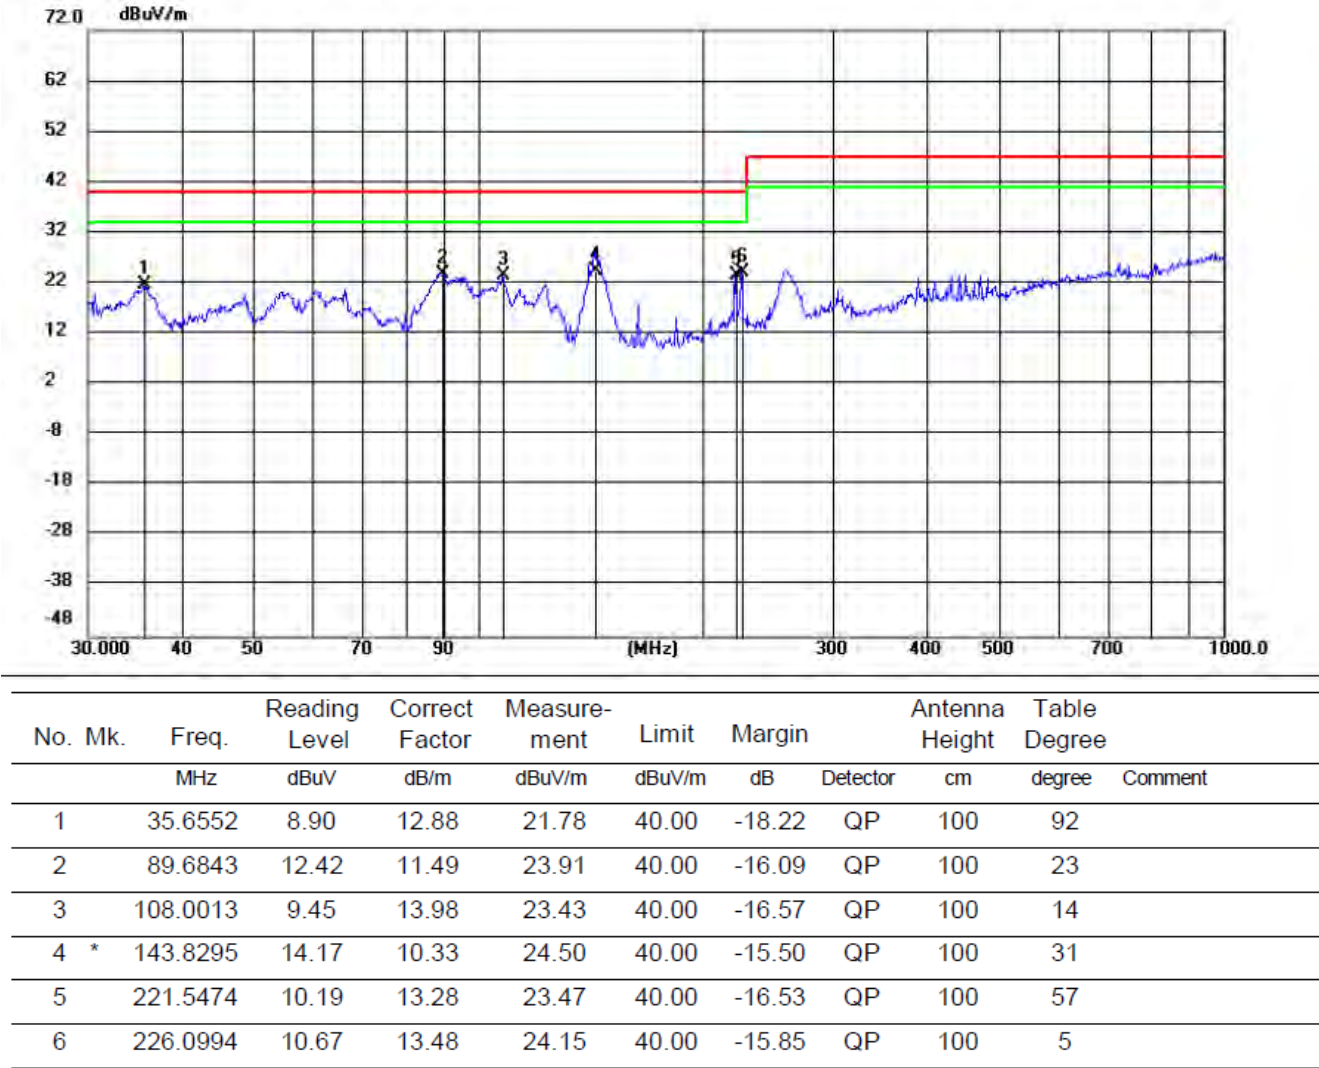

Remark:

1. $\text{Margin} = \text{Measurement}(\text{Level}) - \text{Limit}$.
2. $\text{Measurement}(\text{Level}) = \text{Reading Level} + \text{Correct Factor}$.
3. In the test results, an asterisk (*) indicates Maximum Data, a cross (X) indicates over Limit, an exclamation mark (!) indicates over -6dB margin Limit.


Transmitter Emission above 1GHz

Remark: Through Pre-scan, for 20MHz Occupied Bandwidth, 802.11 n(HT20) was the worst case; for 40MHz Occupied Bandwidth, 802.11 n(HT40) was the worst case; for 80MHz Occupied Bandwidth; only the worst case was in the report.

U-NII-1:

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5180Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

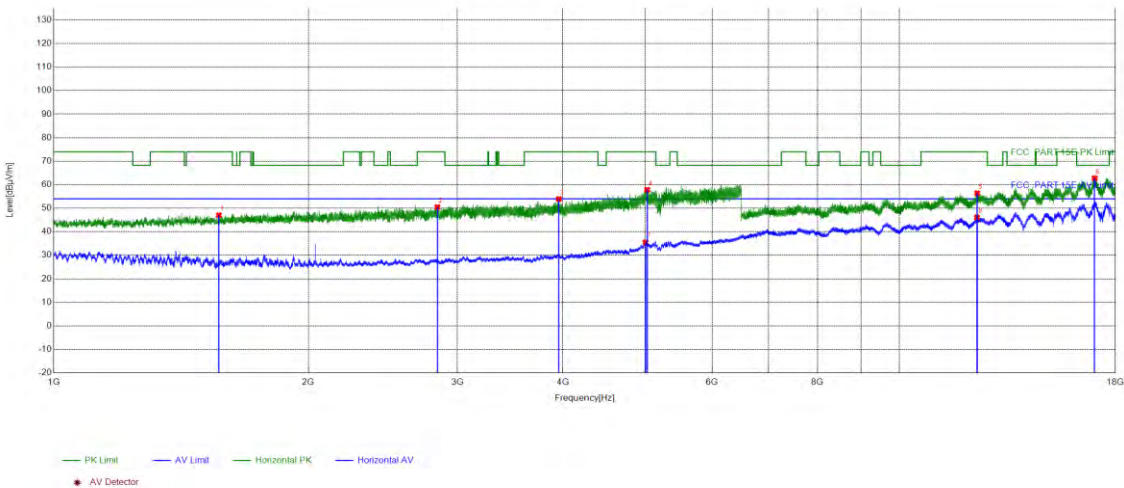

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1567.6227	13.65	33.39	47.04	74.00	26.96	PASS	Horizontal	PK
2	2840.8136	17.57	32.89	50.46	74.00	23.54	PASS	Horizontal	PK
3	3955.5982	21.58	32.32	53.90	74.00	20.10	PASS	Horizontal	PK
4	5030.7812	25.30	32.53	57.83	74.00	16.17	PASS	Horizontal	PK
5	12354.3677	4.70	51.67	56.37	74.00	17.63	PASS	Horizontal	PK
6	17010.3755	12.61	50.16	62.77	68.20	5.43	PASS	Horizontal	PK
7	5008.5603	25.17	10.31	35.48	54.00	18.52	PASS	Horizontal	AV
8	12348.0424	4.70	41.42	46.12	54.00	7.88	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5180Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

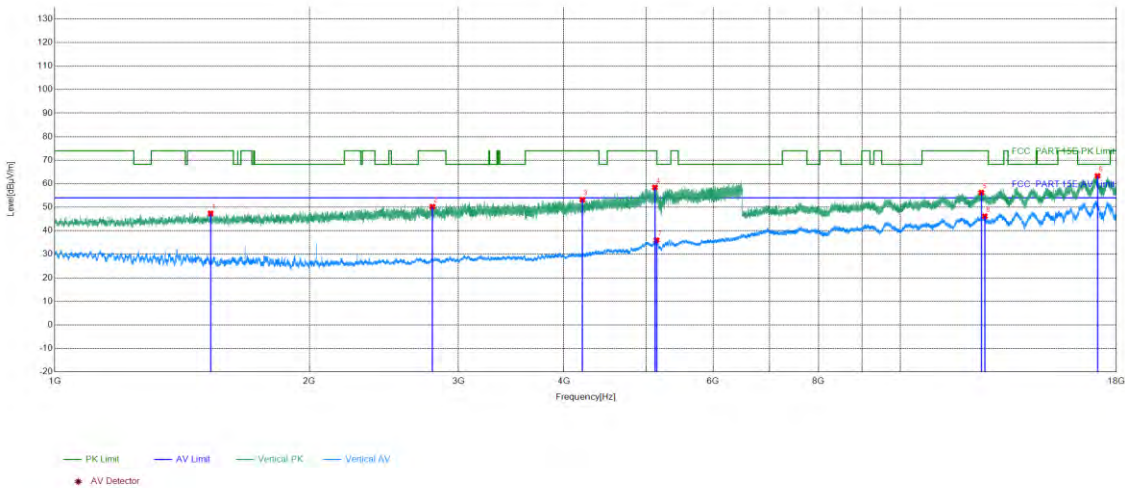

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1528.4611	13.61	33.76	47.37	74.00	26.63	PASS	Vertical	PK
2	2795.9318	17.38	32.84	50.22	74.00	23.78	PASS	Vertical	PK
3	4206.1882	22.26	30.91	53.17	74.00	20.83	PASS	Vertical	PK
4	5123.4049	27.32	31.08	58.40	74.00	15.60	PASS	Vertical	PK
5	12461.3231	3.57	52.66	56.23	74.00	17.77	PASS	Vertical	PK
6	17098.3549	12.25	51.06	63.31	68.20	4.89	PASS	Vertical	PK
7	5147.3859	27.49	8.52	36.01	54.00	17.99	PASS	Vertical	AV
8	12577.4789	4.59	41.59	46.18	54.00	7.82	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5180Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

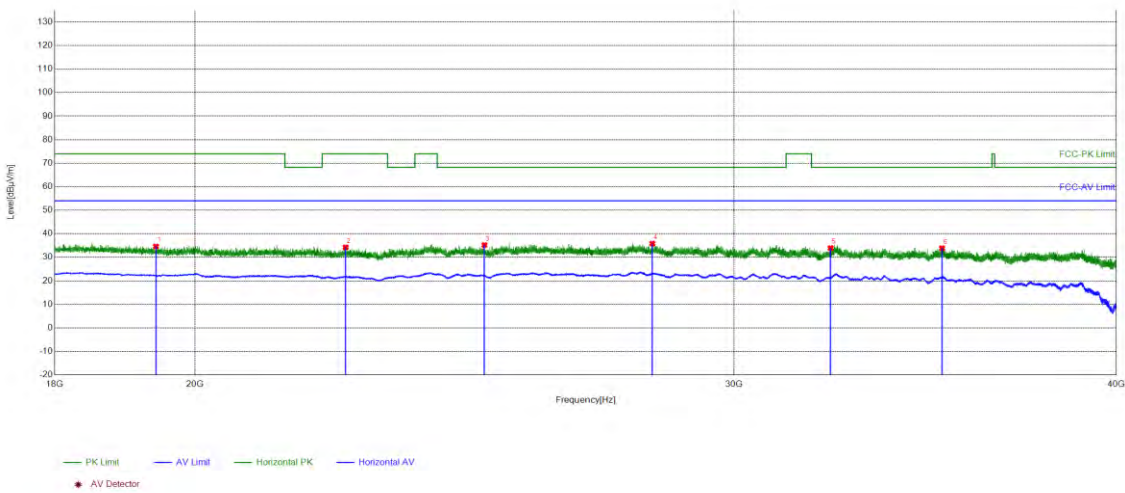

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	19422.1369	-25.62	60.24	34.62	74.00	39.38	PASS	Horizontal	PK
2	22401.056	-25.10	59.33	34.23	74.00	39.77	PASS	Horizontal	PK
3	24866.0346	-22.02	57.21	35.19	68.20	33.01	PASS	Horizontal	PK
4	28214.5686	-21.32	57.14	35.82	68.20	32.38	PASS	Horizontal	PK
5	32263.6105	-18.91	52.83	33.92	68.20	34.28	PASS	Horizontal	PK
6	35082.3633	-16.02	49.85	33.83	68.20	34.37	PASS	Horizontal	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5180Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

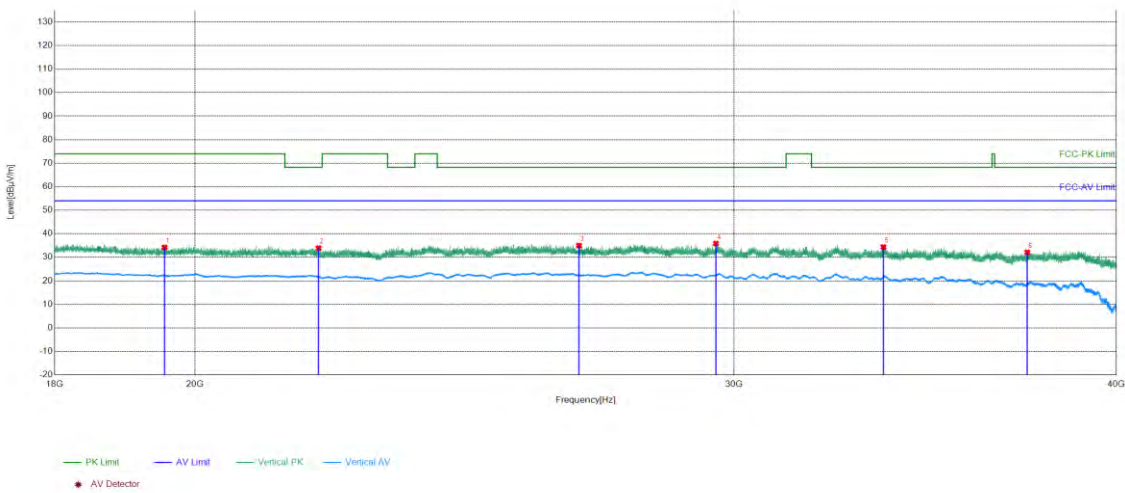

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19548.862	-25.60	59.80	34.20	74.00	39.80	PASS	Vertical	PK
2	21948.7179	-25.74	59.61	33.87	68.20	34.33	PASS	Vertical	PK
3	26700.028	-21.33	56.33	35.00	68.20	33.20	PASS	Vertical	PK
4	29595.3438	-20.62	56.47	35.85	68.20	32.35	PASS	Vertical	PK
5	33570.4628	-17.44	51.79	34.35	68.20	33.85	PASS	Vertical	PK
6	37407.4163	-15.81	47.92	32.11	68.20	36.09	PASS	Vertical	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5200Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

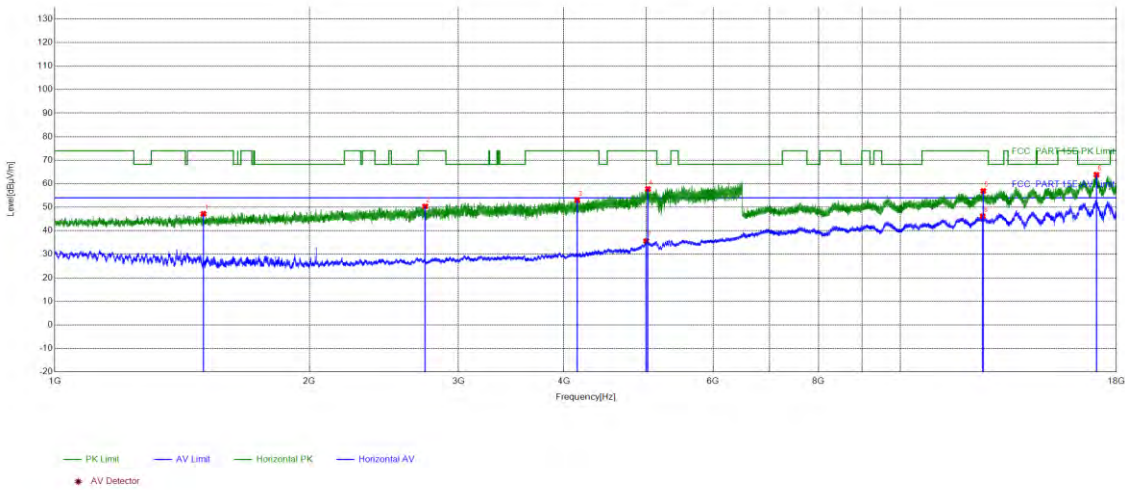

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1498.7599	13.44	33.73	47.17	74.00	26.83	PASS	Horizontal	PK
2	2741.5897	17.06	33.31	50.37	74.00	23.63	PASS	Horizontal	PK
3	4146.3459	22.11	30.95	53.06	74.00	20.94	PASS	Horizontal	PK
4	5027.2611	25.23	32.53	57.76	74.00	16.24	PASS	Horizontal	PK
5	12528.6014	4.84	52.05	56.89	74.00	17.11	PASS	Horizontal	PK
6	17051.7776	12.34	51.44	63.78	68.20	4.42	PASS	Horizontal	PK
7	5004.3802	25.08	10.55	35.63	54.00	18.37	PASS	Horizontal	AV
8	12504.4502	4.55	41.63	46.18	54.00	7.82	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5200Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

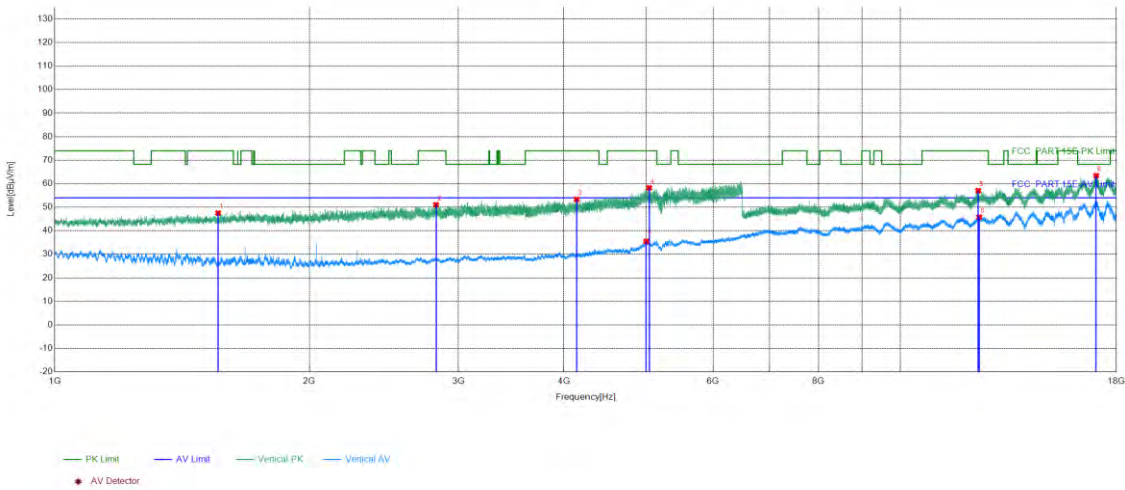

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1559.9224	13.69	33.85	47.54	74.00	26.46	PASS	Vertical	PK
2	2823.6529	17.35	33.69	51.04	74.00	22.96	PASS	Vertical	PK
3	4139.9656	22.25	31.08	53.33	74.00	20.67	PASS	Vertical	PK
4	5045.0818	25.47	32.77	58.24	74.00	15.76	PASS	Vertical	PK
5	12355.5178	4.68	52.33	57.01	74.00	16.99	PASS	Vertical	PK
6	17038.5519	12.43	50.95	63.38	68.20	4.82	PASS	Vertical	PK
7	5004.6002	25.08	10.39	35.47	54.00	18.53	PASS	Vertical	AV
8	12393.4697	4.23	41.58	45.81	54.00	8.19	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5200Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

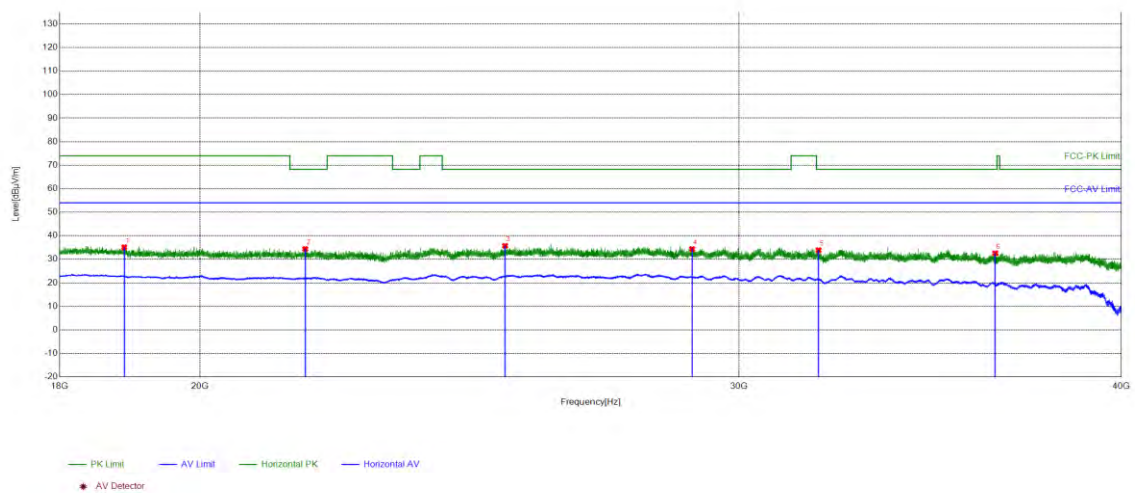

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18893.2357	-26.28	61.37	35.09	74.00	38.91	PASS	Horizont	PK
2	21649.506	-25.69	60.09	34.40	68.20	33.80	PASS	Horizont	PK
3	25159.9664	-21.26	56.97	35.71	68.20	32.49	PASS	Horizont	PK
4	28962.5985	-21.33	55.70	34.37	68.20	33.83	PASS	Horizont	PK
5	31850.874	-20.08	53.97	33.89	68.20	34.31	PASS	Horizont	PK
6	36377.7751	-16.72	49.30	32.58	68.20	35.62	PASS	Horizont	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5200Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

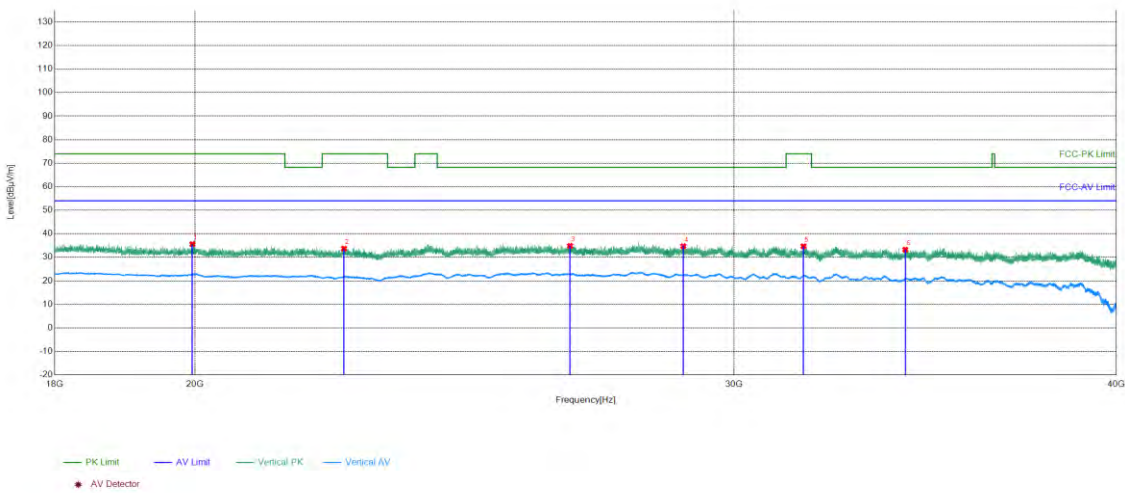

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	19963.3585	-24.73	60.29	35.56	74.00	38.44	PASS	Vertical	PK
2	22373.775	-25.14	58.82	33.68	74.00	40.32	PASS	Vertical	PK
3	26520.5008	-21.13	55.96	34.83	68.20	33.37	PASS	Vertical	PK
4	28878.1151	-21.41	56.14	34.73	68.20	33.47	PASS	Vertical	PK
5	31611.5045	-19.64	54.33	34.69	74.00	39.31	PASS	Vertical	PK
6	34126.6451	-17.58	50.82	33.24	68.20	34.96	PASS	Vertical	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5240Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

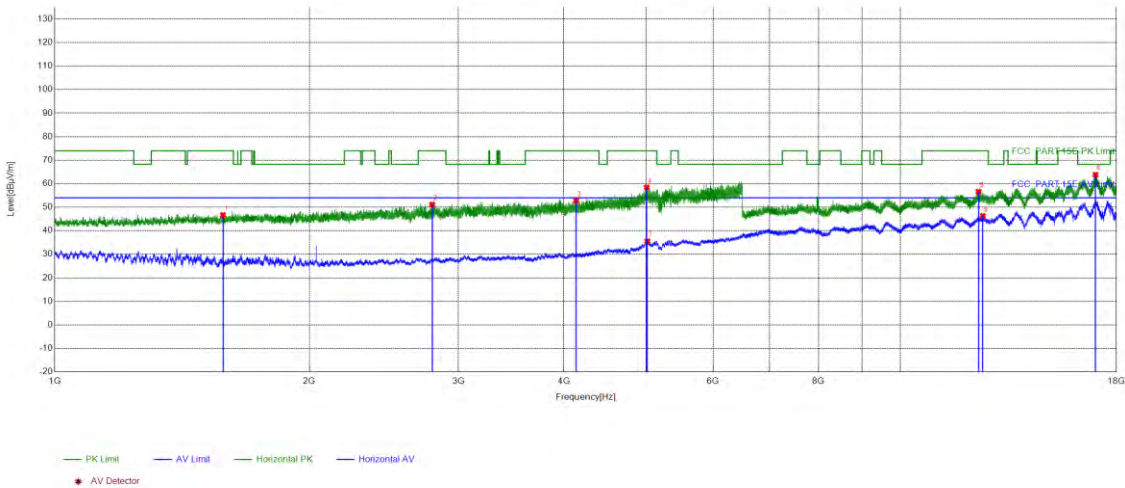

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1580.6032	13.70	33.02	46.72	74.00	27.28	PASS	Horizontal	PK
2	2794.6118	17.38	33.76	51.14	74.00	22.86	PASS	Horizontal	PK
3	4134.6854	22.14	30.67	52.81	74.00	21.19	PASS	Horizontal	PK
4	5011.4205	25.18	33.23	58.41	74.00	15.59	PASS	Horizontal	PK
5	12366.4433	4.55	52.09	56.64	74.00	17.36	PASS	Horizontal	PK
6	17001.1751	12.67	51.10	63.77	68.20	4.43	PASS	Horizontal	PK
7	5019.7808	25.07	10.49	35.56	54.00	18.44	PASS	Horizontal	AV
8	12512.5006	4.65	41.66	46.31	54.00	7.69	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5240Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

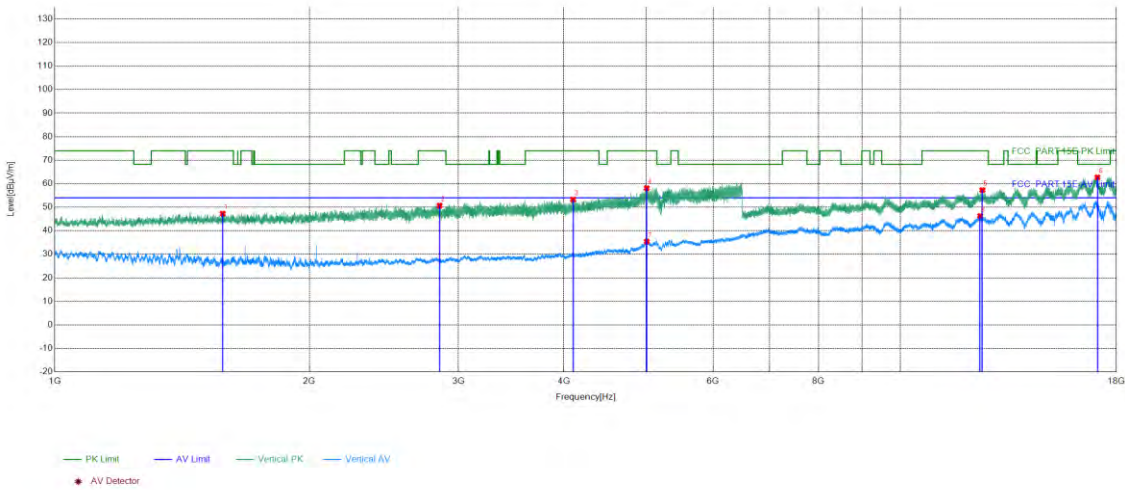

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1579.5032	13.69	33.60	47.29	74.00	26.71	PASS	Vertical	PK
2	2850.714	17.46	33.19	50.65	74.00	23.35	PASS	Vertical	PK
3	4100.144	21.92	31.37	53.29	74.00	20.71	PASS	Vertical	PK
4	5010.5404	25.19	32.93	58.12	74.00	15.88	PASS	Vertical	PK
5	12494.0997	4.36	52.93	57.29	74.00	16.71	PASS	Vertical	PK
6	17093.1797	12.26	50.42	62.68	68.20	5.52	PASS	Vertical	PK
7	5011.4205	25.18	10.24	35.42	54.00	18.58	PASS	Vertical	AV
8	12419.346	3.82	42.49	46.31	54.00	7.69	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5240Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

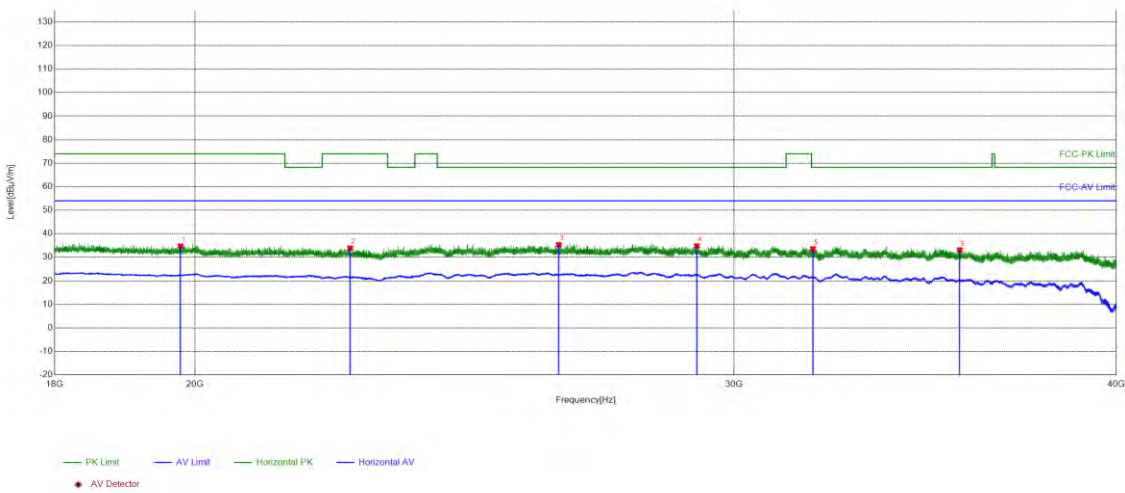

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	19785.5914	-25.25	59.99	34.74	74.00	39.26	PASS	Horizontal	PK
2	22477.6191	-25.06	58.94	33.88	74.00	40.12	PASS	Horizontal	PK
3	26295.2118	-21.27	56.59	35.32	68.20	32.88	PASS	Horizontal	PK
4	29174.687	-21.46	56.30	34.84	68.20	33.36	PASS	Horizontal	PK
5	31835.0334	-20.01	53.58	33.57	68.20	34.63	PASS	Horizontal	PK
6	35553.1821	-16.15	49.27	33.12	68.20	35.08	PASS	Horizontal	PK


Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5240Mhz
Remark:	\	Test_Date	2026/6/23

Test Graph

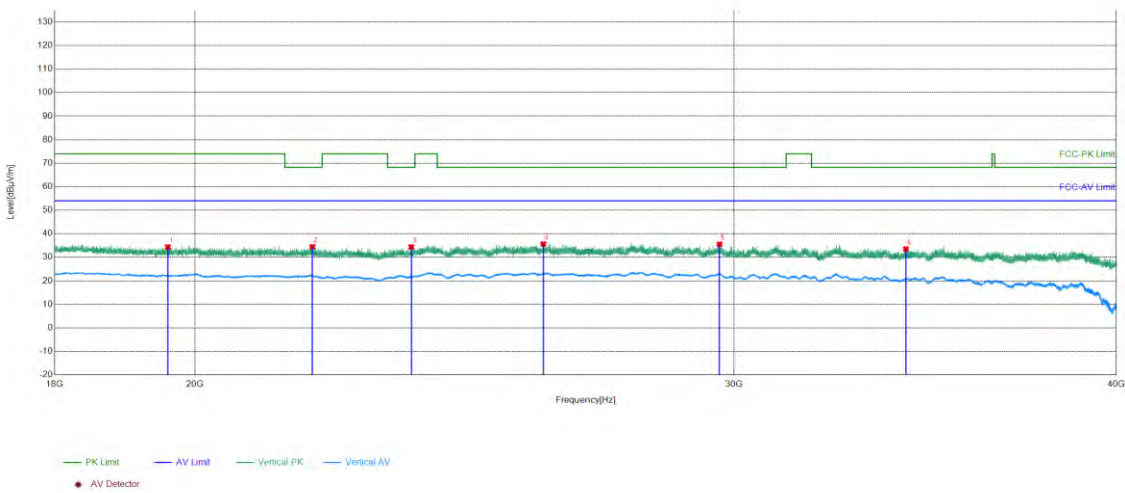

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	19597.2639	-25.59	59.98	34.39	74.00	39.61	PASS	Vertical	PK
2	21848.3939	-25.60	60.06	34.46	68.20	33.74	PASS	Vertical	PK
3	23535.4214	-23.23	57.62	34.39	68.20	33.81	PASS	Vertical	PK
4	25992.4797	-20.90	56.53	35.63	68.20	32.57	PASS	Vertical	PK
5	29675.427	-20.74	56.28	35.54	68.20	32.66	PASS	Vertical	PK
6	34142.4857	-17.53	51.03	33.50	68.20	34.70	PASS	Vertical	PK


Test Graph

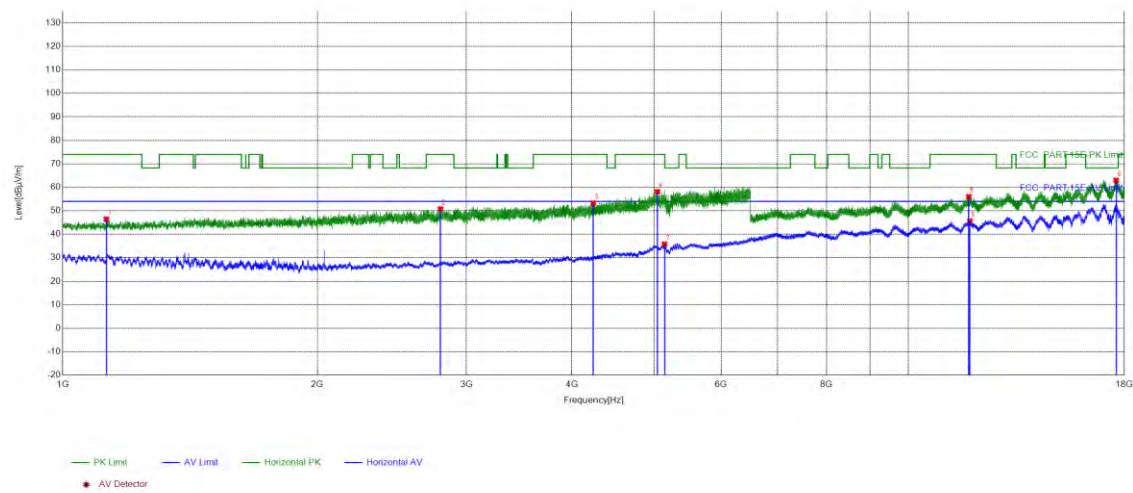

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1126.065	11.50	34.93	46.43	74.00	27.57	PASS	Horizont	PK
2	2795.9318	17.38	33.41	50.79	74.00	23.21	PASS	Horizont	PK
3	4238.9696	22.64	30.65	53.29	74.00	20.71	PASS	Horizont	PK
4	5047.5019	25.51	32.65	58.16	74.00	15.84	PASS	Horizont	PK
5	11784.5142	2.27	53.73	56.00	74.00	18.00	PASS	Horizont	PK
6	17598.6299	14.11	48.82	62.93	68.20	5.27	PASS	Horizont	PK
7	5145.8458	27.49	8.28	35.77	54.00	18.23	PASS	Horizont	AV
8	11820.166	2.58	43.06	45.64	54.00	8.36	PASS	Horizont	AV

Test_Mode	802.11 a Transmitting	Test_Frequency	5180Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

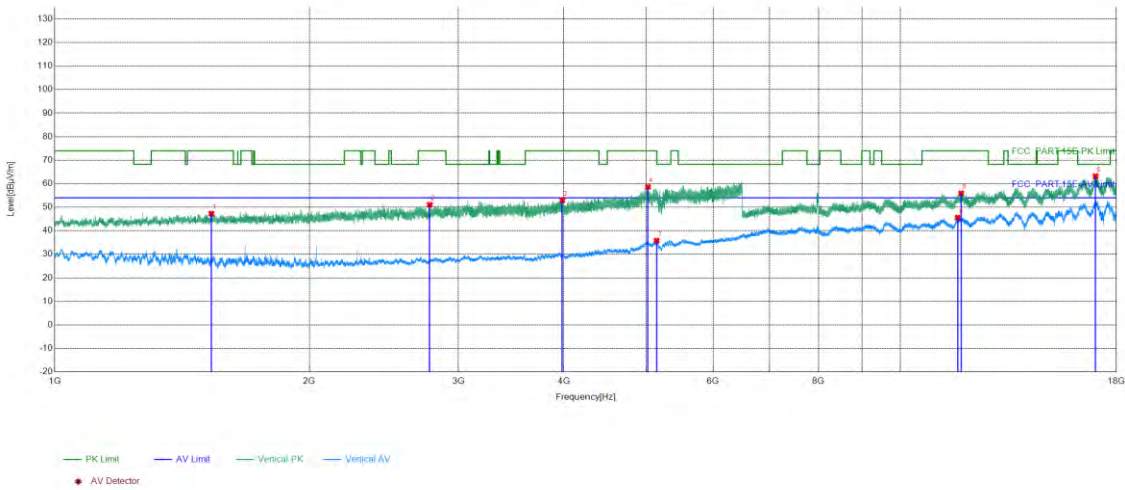

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1531.5413	13.64	33.62	47.26	74.00	26.74	PASS	Vertical	PK
2	2775.471	17.27	33.81	51.08	74.00	22.92	PASS	Vertical	PK
3	3981.9993	21.58	31.38	52.96	74.00	21.04	PASS	Vertical	PK
4	5026.3811	25.21	33.43	58.64	74.00	15.36	PASS	Vertical	PK
5	11794.8647	2.25	53.70	55.95	74.00	18.05	PASS	Vertical	PK
6	17004.0502	12.65	50.57	63.22	68.20	4.98	PASS	Vertical	PK
7	5148.2659	27.50	8.30	35.80	54.00	18.20	PASS	Vertical	AV
8	11684.4592	2.94	42.65	45.59	54.00	8.41	PASS	Vertical	AV

Test_Mode	802.11 a Transmitting	Test_Frequency	5180Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

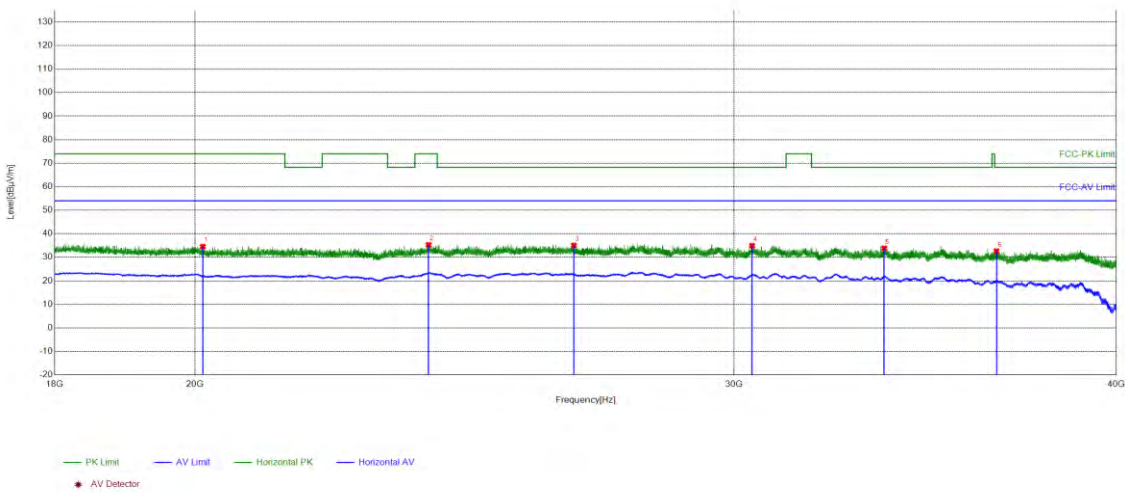

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	20119.1248	-25.15	59.72	34.57	74.00	39.43	PASS	Horizontal	PK
2	23842.5537	-22.24	57.53	35.29	74.00	38.71	PASS	Horizontal	PK
3	26597.0639	-21.11	56.17	35.06	68.20	33.14	PASS	Horizontal	PK
4	30412.8965	-20.35	55.27	34.92	68.20	33.28	PASS	Horizontal	PK
5	33589.8236	-17.37	51.21	33.84	68.20	34.36	PASS	Horizontal	PK
6	36549.382	-16.00	48.62	32.62	68.20	35.58	PASS	Horizontal	PK

Test_Mode	802.11 a Transmitting	Test_Frequency	5180Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

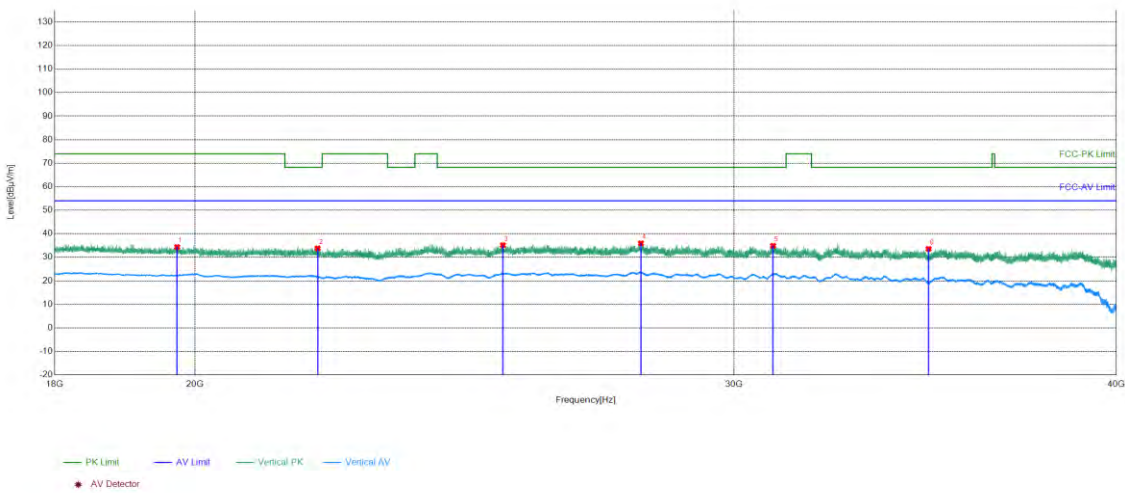

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	19735.4294	-25.34	59.72	34.38	74.00	39.62	PASS	Vertical	PK
2	21934.6374	-25.72	59.51	33.79	68.20	34.41	PASS	Vertical	PK
3	25213.6485	-21.07	56.23	35.16	68.20	33.04	PASS	Vertical	PK
4	27972.5589	-21.18	57.10	35.92	68.20	32.28	PASS	Vertical	PK
5	30896.0358	-19.49	54.38	34.89	68.20	33.31	PASS	Vertical	PK
6	34730.3492	-16.35	49.95	33.60	68.20	34.60	PASS	Vertical	PK

Test_Mode	802.11 a Transmitting	Test_Frequency	5200Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

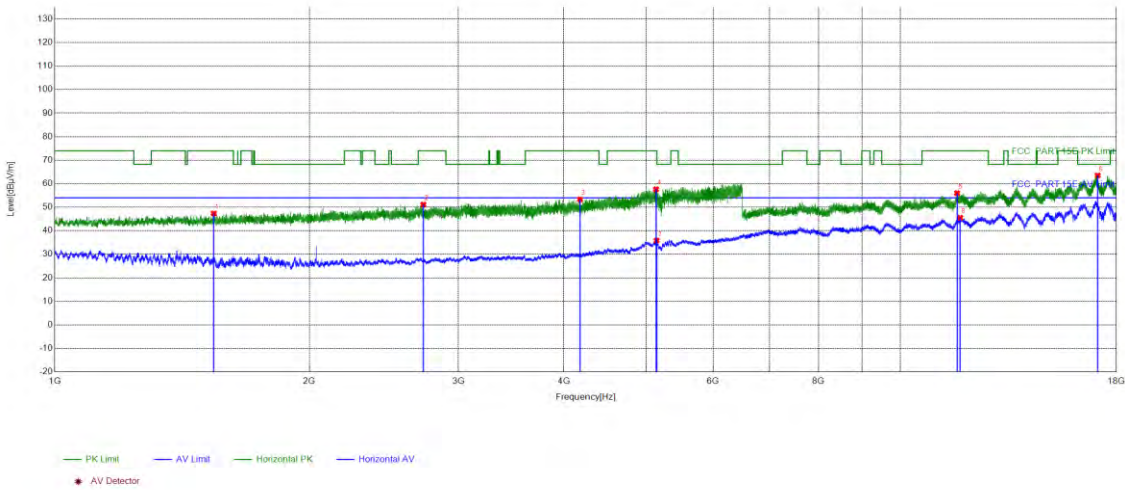

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1541.8817	13.62	33.72	47.34	74.00	26.66	PASS	Horizontal	PK
2	2727.2891	17.23	33.89	51.12	74.00	22.88	PASS	Horizontal	PK
3	4178.4671	22.31	31.05	53.36	74.00	20.64	PASS	Horizontal	PK
4	5139.2456	27.48	30.16	57.64	74.00	16.36	PASS	Horizontal	PK
5	11663.7582	2.68	53.33	56.01	74.00	17.99	PASS	Horizontal	PK
6	17106.9803	12.29	51.20	63.49	68.20	4.71	PASS	Horizontal	PK
7	5147.8259	27.50	8.32	35.82	54.00	18.18	PASS	Horizontal	AV
8	11763.8132	2.33	43.20	45.53	54.00	8.47	PASS	Horizontal	AV

Test_Mode	802.11 a Transmitting	Test_Frequency	5200Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

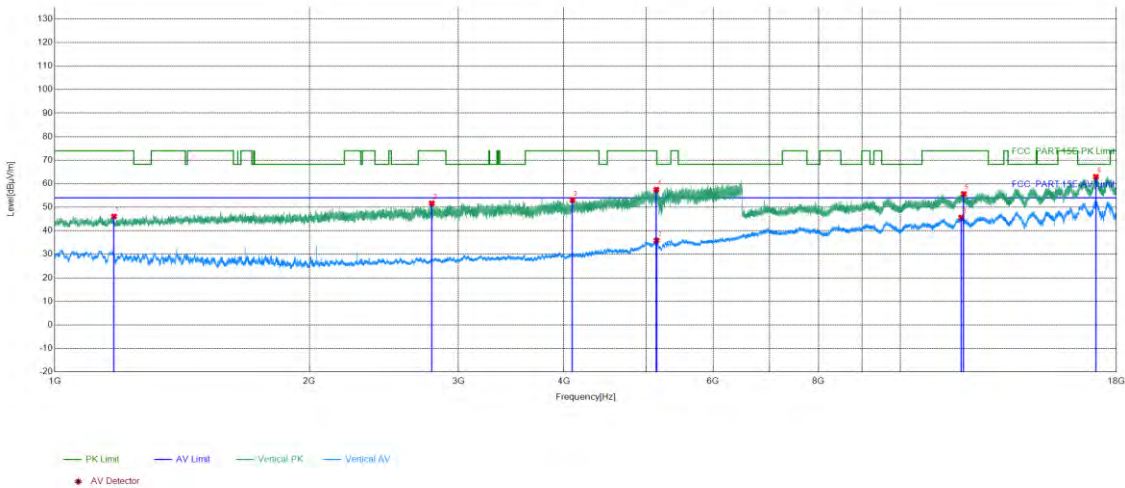

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1175.127	11.55	34.54	46.09	74.00	27.91	PASS	Vertical	PK
2	2791.5317	17.39	34.26	51.65	74.00	22.35	PASS	Vertical	PK
3	4093.5437	22.08	31.01	53.09	74.00	20.91	PASS	Vertical	PK
4	5143.6457	27.49	30.03	57.52	74.00	16.48	PASS	Vertical	PK
5	11878.2439	3.08	52.56	55.64	74.00	18.36	PASS	Vertical	PK
6	17025.3263	12.52	50.39	62.91	68.20	5.29	PASS	Vertical	PK
7	5146.2859	27.49	8.37	35.86	54.00	18.14	PASS	Vertical	AV
8	11802.3401	2.27	43.35	45.62	54.00	8.38	PASS	Vertical	AV

Test_Mode	802.11 a Transmitting	Test_Frequency	5200Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

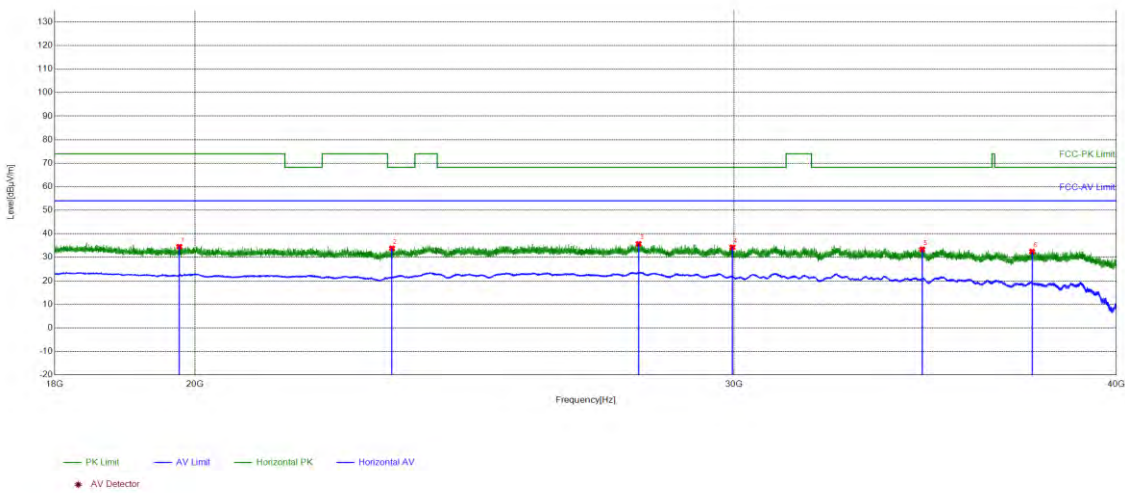

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19767.1107	-25.29	59.79	34.50	74.00	39.50	PASS	Horizontal	PK
2	23195.7278	-24.30	58.09	33.79	68.20	34.41	PASS	Horizontal	PK
3	27924.157	-21.15	56.84	35.69	68.20	32.51	PASS	Horizontal	PK
4	29964.9586	-21.06	55.28	34.22	68.20	33.98	PASS	Horizontal	PK
5	34564.0226	-16.29	49.62	33.33	68.20	34.87	PASS	Horizontal	PK
6	37541.1816	-15.13	47.54	32.41	68.20	35.79	PASS	Horizontal	PK

Test_Mode	802.11 a Transmitting	Test_Frequency	5200Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

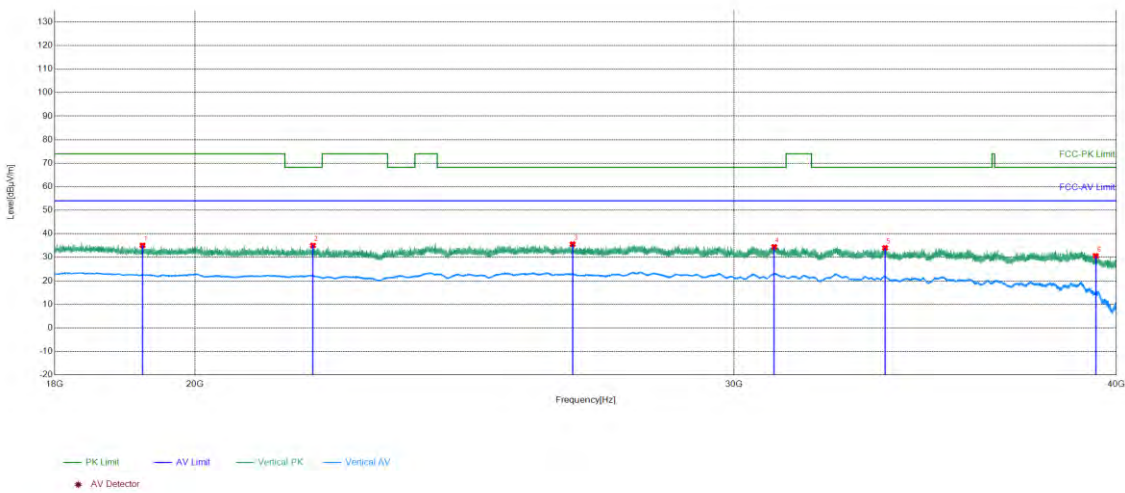

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	19227.6491	-25.99	61.05	35.06	74.00	38.94	PASS	Vertical	PK
2	21858.0743	-25.61	60.61	35.00	68.20	33.20	PASS	Vertical	PK
3	26570.6628	-21.11	56.66	35.55	68.20	32.65	PASS	Vertical	PK
4	30924.197	-19.44	53.86	34.42	68.20	33.78	PASS	Vertical	PK
5	33612.7045	-17.35	51.33	33.98	68.20	34.22	PASS	Vertical	PK
6	39383.0953	-13.88	44.48	30.60	68.20	37.60	PASS	Vertical	PK

Test_Mode	802.11 a Transmitting	Test_Frequency	5240Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

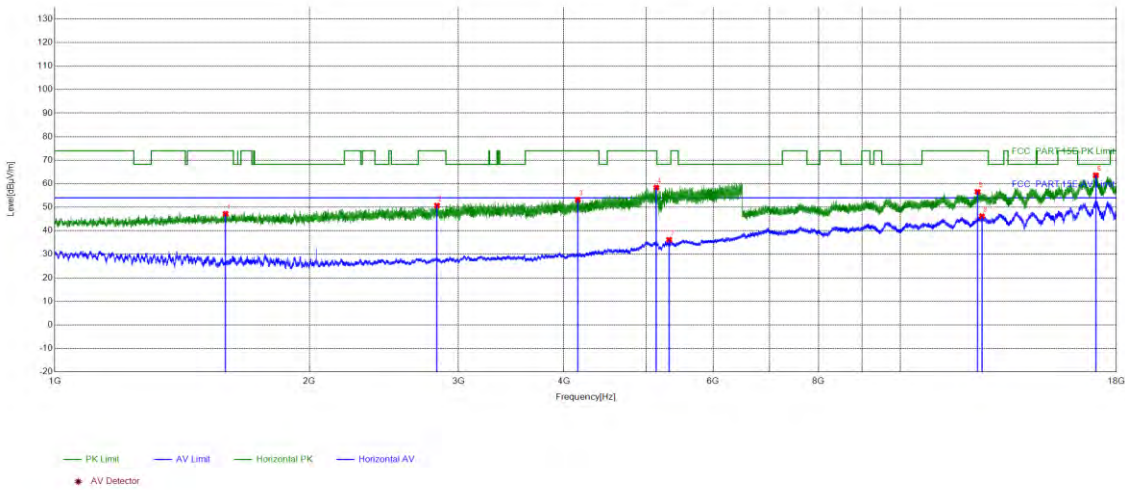

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1592.4837	13.84	33.33	47.17	74.00	26.83	PASS	Horizontal	PK
2	2831.1332	17.44	33.25	50.69	74.00	23.31	PASS	Horizontal	PK
3	4153.3861	22.10	31.12	53.22	74.00	20.78	PASS	Horizontal	PK
4	5143.8658	27.49	30.86	58.35	74.00	15.65	PASS	Horizontal	PK
5	12335.3918	4.42	52.10	56.52	74.00	17.48	PASS	Horizontal	PK
6	17021.3011	12.54	51.05	63.59	68.20	4.61	PASS	Horizontal	PK
7	5325.813	27.85	8.31	36.16	54.00	17.84	PASS	Horizontal	AV
8	12482.5991	4.08	42.12	46.20	54.00	7.80	PASS	Horizontal	AV

Test_Mode	802.11 a Transmitting	Test_Frequency	5240Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

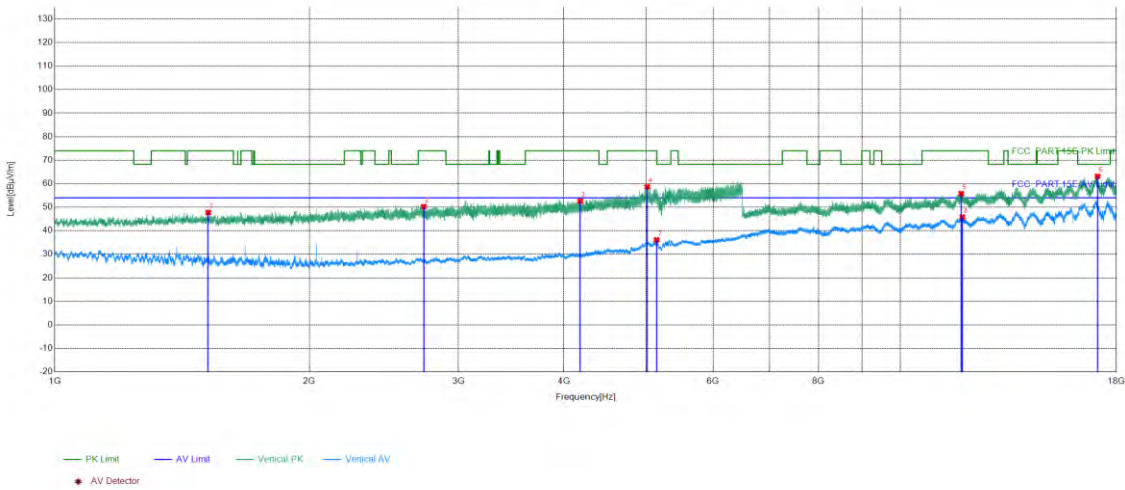

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1518.5607	13.46	34.31	47.77	74.00	26.23	PASS	Vertical	PK
2	2730.5892	17.23	33.00	50.23	74.00	23.77	PASS	Vertical	PK
3	4180.8872	22.35	30.26	52.61	74.00	21.39	PASS	Vertical	PK
4	5018.0207	25.10	33.56	58.66	74.00	15.34	PASS	Vertical	PK
5	11794.8647	2.25	53.53	55.78	74.00	18.22	PASS	Vertical	PK
6	17100.08	12.25	50.89	63.14	68.20	5.06	PASS	Vertical	PK
7	5146.7259	27.49	8.60	36.09	54.00	17.91	PASS	Vertical	AV
8	11831.0916	2.78	43.02	45.80	54.00	8.20	PASS	Vertical	AV

Test_Mode	802.11 a Transmitting	Test_Frequency	5240Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

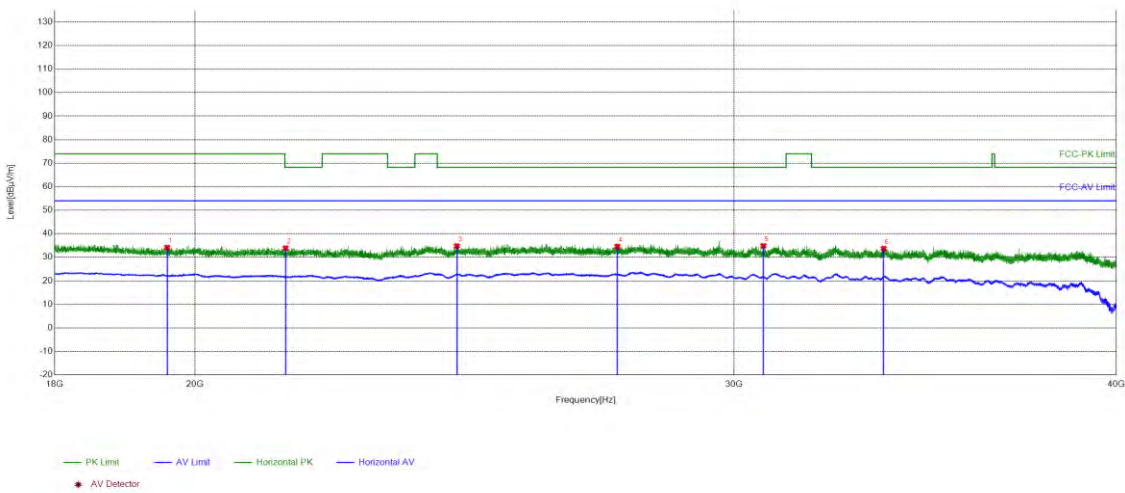

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	19587.5835	-25.59	59.75	34.16	74.00	39.84	PASS	Horizontal	PK
2	21412.7765	-25.87	59.76	33.89	68.20	34.31	PASS	Horizontal	PK
3	24357.3743	-21.88	56.65	34.77	68.20	33.43	PASS	Horizontal	PK
4	27483.2593	-21.61	56.20	34.59	68.20	33.61	PASS	Horizontal	PK
5	30672.5069	-20.24	55.08	34.84	68.20	33.36	PASS	Horizontal	PK
6	33575.743	-17.42	51.13	33.71	68.20	34.49	PASS	Horizontal	PK

Test_Mode	802.11 a Transmitting	Test_Frequency	5240Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

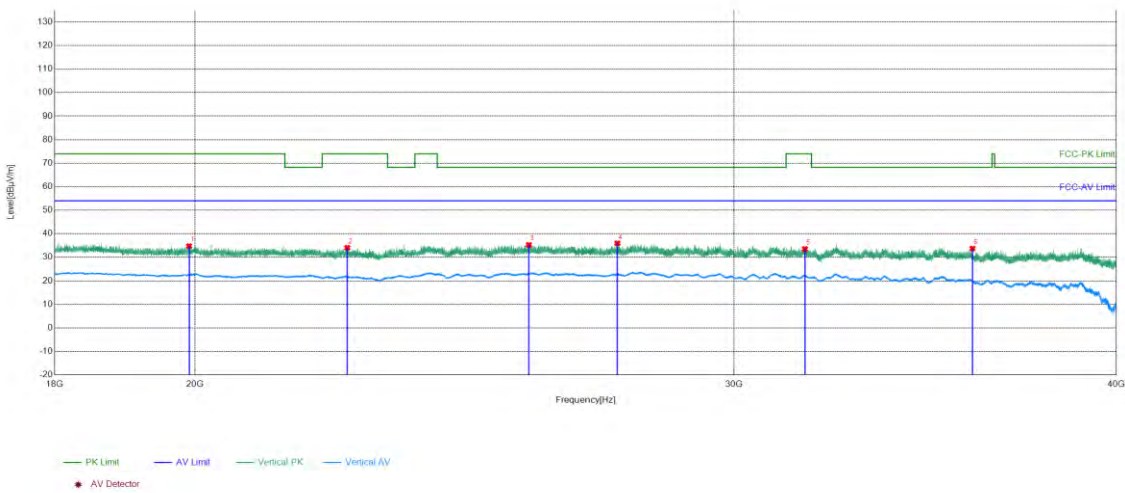

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	19913.1965	-24.89	59.66	34.77	74.00	39.23	PASS	Vertical	PK
2	22430.0972	-25.08	59.12	34.04	74.00	39.96	PASS	Vertical	PK
3	25712.6285	-20.77	56.03	35.26	68.20	32.94	PASS	Vertical	PK
4	27481.4993	-21.61	57.50	35.89	68.20	32.31	PASS	Vertical	PK
5	31644.9458	-19.69	53.23	33.54	74.00	40.46	PASS	Vertical	PK
6	35894.6358	-16.99	50.69	33.70	68.20	34.50	PASS	Vertical	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5180Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

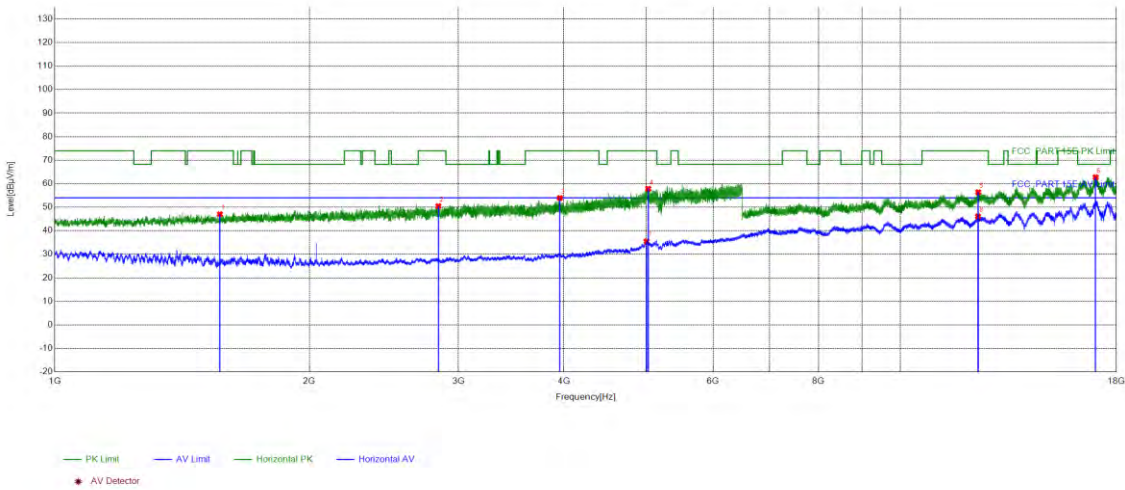

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1567.6227	13.65	33.39	47.04	74.00	26.96	PASS	Horizontal	PK
2	2840.8136	17.57	32.89	50.46	74.00	23.54	PASS	Horizontal	PK
3	3955.5982	21.58	32.32	53.90	74.00	20.10	PASS	Horizontal	PK
4	5030.7812	25.30	32.53	57.83	74.00	16.17	PASS	Horizontal	PK
5	12354.3677	4.70	51.67	56.37	74.00	17.63	PASS	Horizontal	PK
6	17010.3755	12.61	50.16	62.77	68.20	5.43	PASS	Horizontal	PK
7	5008.5603	25.17	10.31	35.48	54.00	18.52	PASS	Horizontal	AV
8	12348.0424	4.70	41.42	46.12	54.00	7.88	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5180Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

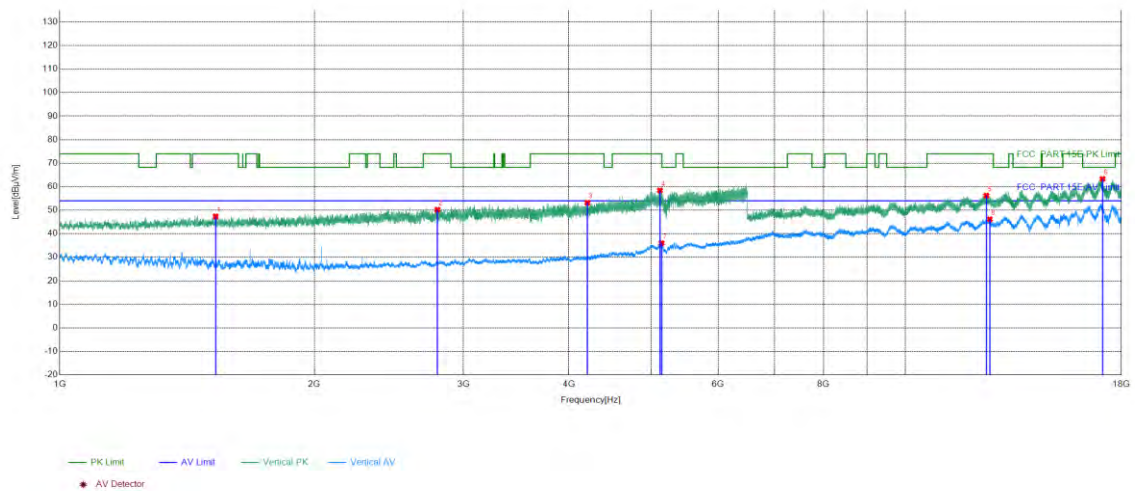

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1528.4611	13.61	33.76	47.37	74.00	26.63	PASS	Vertical	PK
2	2795.9318	17.38	32.84	50.22	74.00	23.78	PASS	Vertical	PK
3	4206.1882	22.26	30.91	53.17	74.00	20.83	PASS	Vertical	PK
4	5123.4049	27.32	31.08	58.40	74.00	15.60	PASS	Vertical	PK
5	12461.3231	3.57	52.66	56.23	74.00	17.77	PASS	Vertical	PK
6	17098.3549	12.25	51.06	63.31	68.20	4.89	PASS	Vertical	PK
7	5147.3859	27.49	8.52	36.01	54.00	17.99	PASS	Vertical	AV
8	12577.4789	4.59	41.59	46.18	54.00	7.82	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5180Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

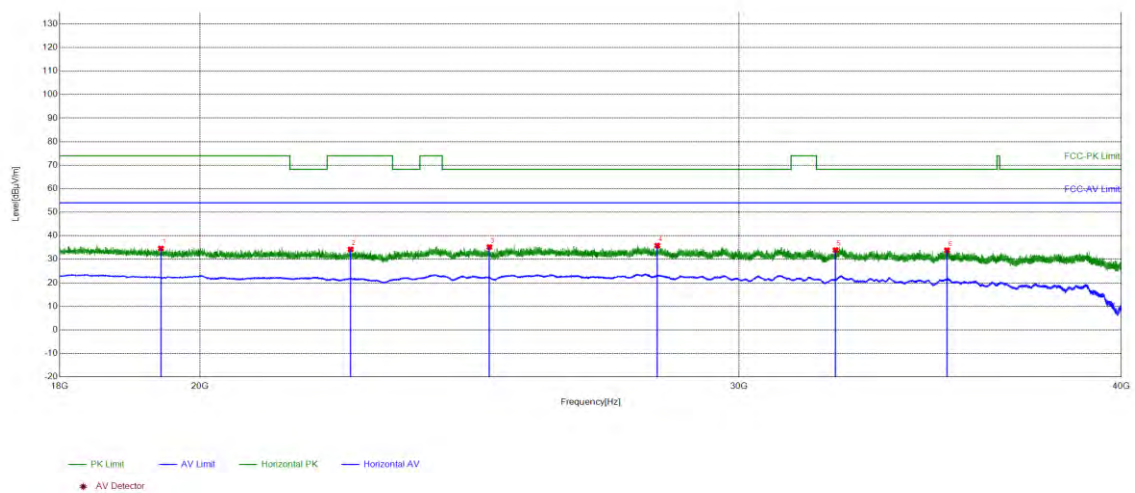

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19422.1369	-25.62	60.24	34.62	74.00	39.38	PASS	Horizont	PK
2	22401.056	-25.10	59.33	34.23	74.00	39.77	PASS	Horizont	PK
3	24866.0346	-22.02	57.21	35.19	68.20	33.01	PASS	Horizont	PK
4	28214.5686	-21.32	57.14	35.82	68.20	32.38	PASS	Horizont	PK
5	32263.6105	-18.91	52.83	33.92	68.20	34.28	PASS	Horizont	PK
6	35082.3633	-16.02	49.85	33.83	68.20	34.37	PASS	Horizont	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5180Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

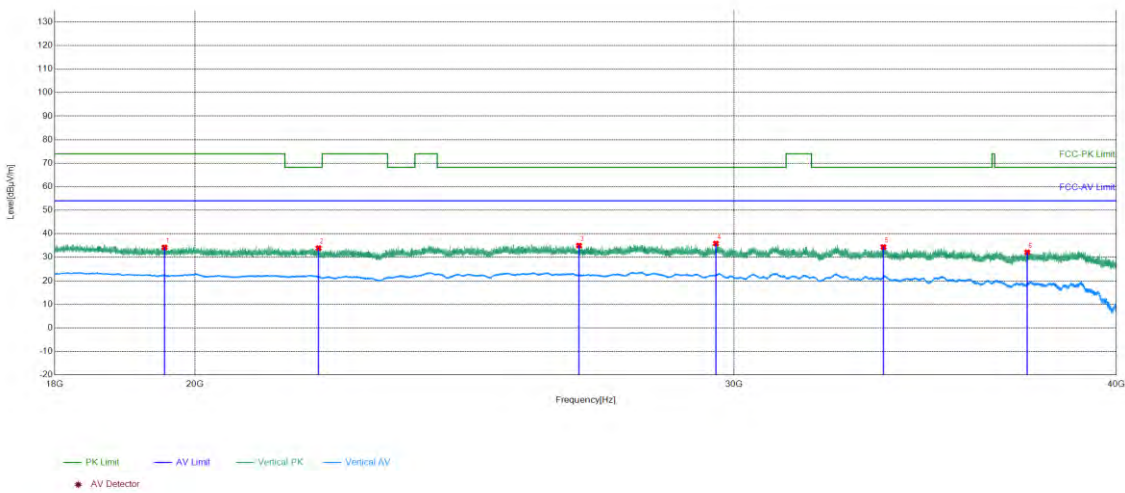

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	19548.862	-25.60	59.80	34.20	74.00	39.80	PASS	Vertical	PK
2	21948.7179	-25.74	59.61	33.87	68.20	34.33	PASS	Vertical	PK
3	26700.028	-21.33	56.33	35.00	68.20	33.20	PASS	Vertical	PK
4	29595.3438	-20.62	56.47	35.85	68.20	32.35	PASS	Vertical	PK
5	33570.4628	-17.44	51.79	34.35	68.20	33.85	PASS	Vertical	PK
6	37407.4163	-15.81	47.92	32.11	68.20	36.09	PASS	Vertical	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5200Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

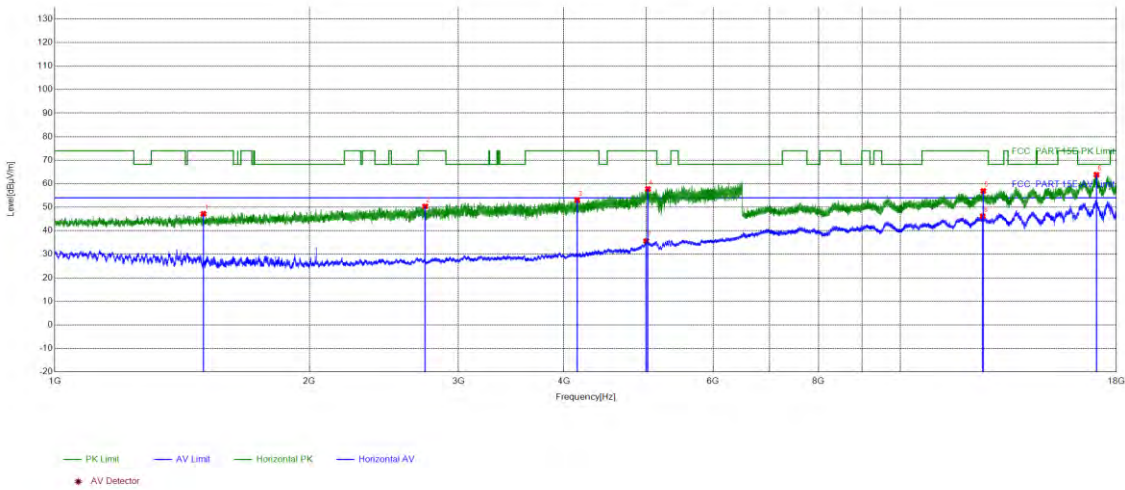

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1498.7599	13.44	33.73	47.17	74.00	26.83	PASS	Horizontal	PK
2	2741.5897	17.06	33.31	50.37	74.00	23.63	PASS	Horizontal	PK
3	4146.3459	22.11	30.95	53.06	74.00	20.94	PASS	Horizontal	PK
4	5027.2611	25.23	32.53	57.76	74.00	16.24	PASS	Horizontal	PK
5	12528.6014	4.84	52.05	56.89	74.00	17.11	PASS	Horizontal	PK
6	17051.7776	12.34	51.44	63.78	68.20	4.42	PASS	Horizontal	PK
7	5004.3802	25.08	10.55	35.63	54.00	18.37	PASS	Horizontal	AV
8	12504.4502	4.55	41.63	46.18	54.00	7.82	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5200Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

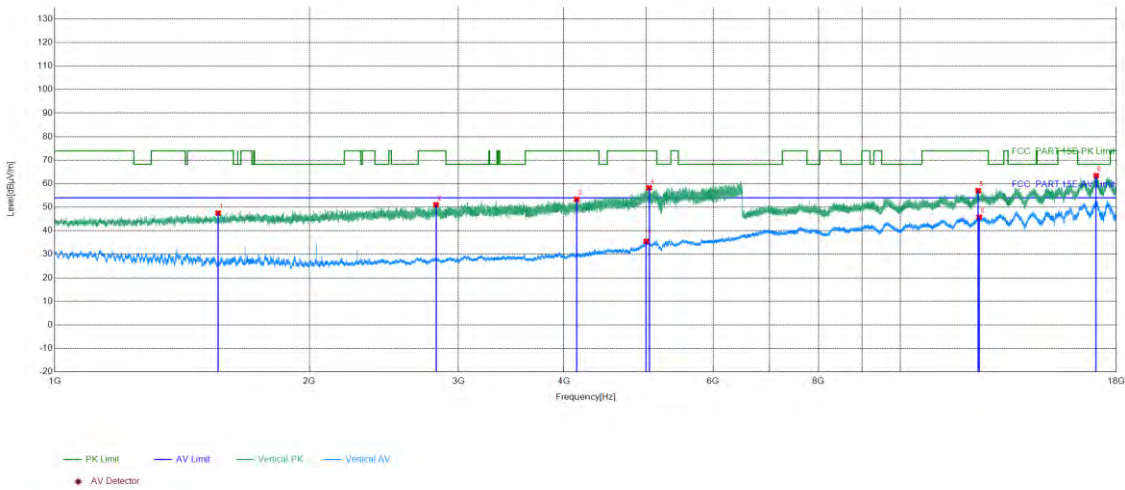

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1559.9224	13.69	33.85	47.54	74.00	26.46	PASS	Vertical	PK
2	2823.6529	17.35	33.69	51.04	74.00	22.96	PASS	Vertical	PK
3	4139.9656	22.25	31.08	53.33	74.00	20.67	PASS	Vertical	PK
4	5045.0818	25.47	32.77	58.24	74.00	15.76	PASS	Vertical	PK
5	12355.5178	4.68	52.33	57.01	74.00	16.99	PASS	Vertical	PK
6	17038.5519	12.43	50.95	63.38	68.20	4.82	PASS	Vertical	PK
7	5004.6002	25.08	10.39	35.47	54.00	18.53	PASS	Vertical	AV
8	12393.4697	4.23	41.58	45.81	54.00	8.19	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5200Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

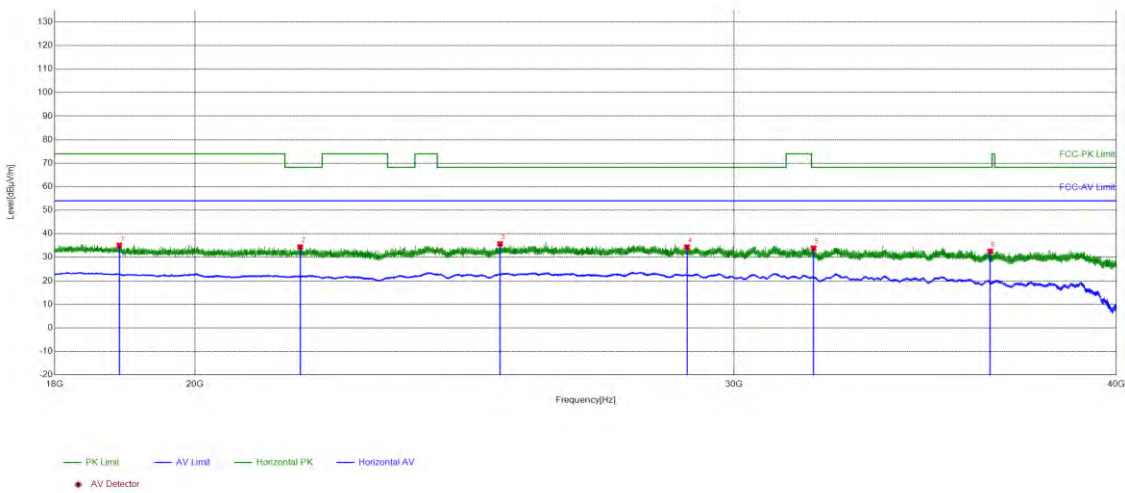

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	18893.2357	-26.28	61.37	35.09	74.00	38.91	PASS	Horizontal	PK
2	21649.506	-25.69	60.09	34.40	68.20	33.80	PASS	Horizontal	PK
3	25159.9664	-21.26	56.97	35.71	68.20	32.49	PASS	Horizontal	PK
4	28962.5985	-21.33	55.70	34.37	68.20	33.83	PASS	Horizontal	PK
5	31850.874	-20.08	53.97	33.89	68.20	34.31	PASS	Horizontal	PK
6	36377.7751	-16.72	49.30	32.58	68.20	35.62	PASS	Horizontal	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5200Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

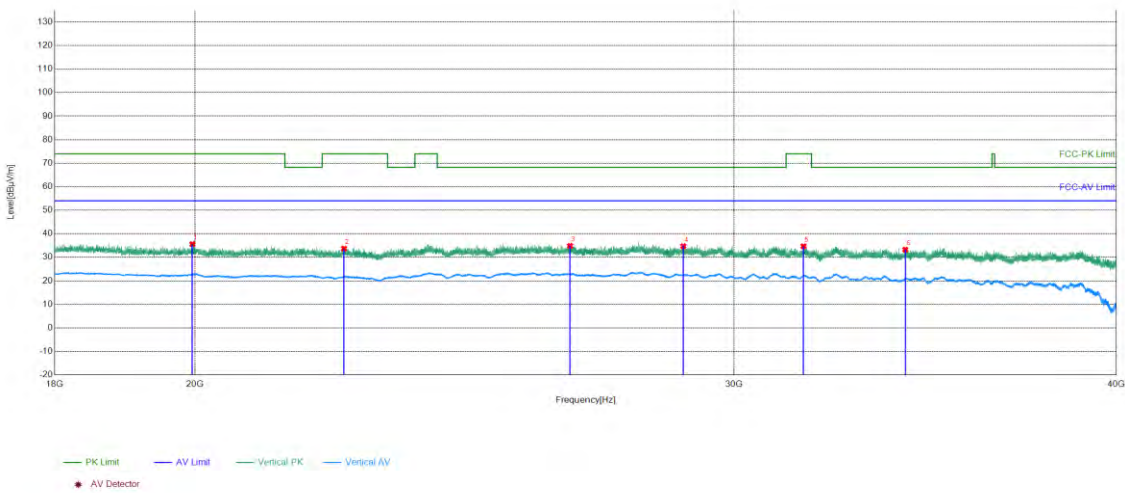

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19963.3585	-24.73	60.29	35.56	74.00	38.44	PASS	Vertical	PK
2	22373.775	-25.14	58.82	33.68	74.00	40.32	PASS	Vertical	PK
3	26520.5008	-21.13	55.96	34.83	68.20	33.37	PASS	Vertical	PK
4	28878.1151	-21.41	56.14	34.73	68.20	33.47	PASS	Vertical	PK
5	31611.5045	-19.64	54.33	34.69	74.00	39.31	PASS	Vertical	PK
6	34126.6451	-17.58	50.82	33.24	68.20	34.96	PASS	Vertical	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5240Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

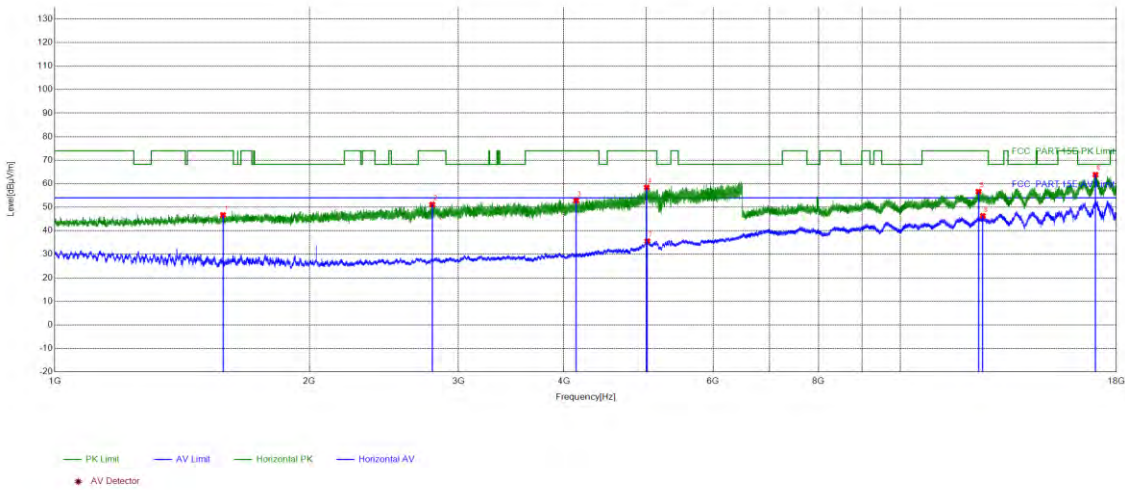

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1580.6032	13.70	33.02	46.72	74.00	27.28	PASS	Horizontal	PK
2	2794.6118	17.38	33.76	51.14	74.00	22.86	PASS	Horizontal	PK
3	4134.6854	22.14	30.67	52.81	74.00	21.19	PASS	Horizontal	PK
4	5011.4205	25.18	33.23	58.41	74.00	15.59	PASS	Horizontal	PK
5	12366.4433	4.55	52.09	56.64	74.00	17.36	PASS	Horizontal	PK
6	17001.1751	12.67	51.10	63.77	68.20	4.43	PASS	Horizontal	PK
7	5019.7808	25.07	10.49	35.56	54.00	18.44	PASS	Horizontal	AV
8	12512.5006	4.65	41.66	46.31	54.00	7.69	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5240Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

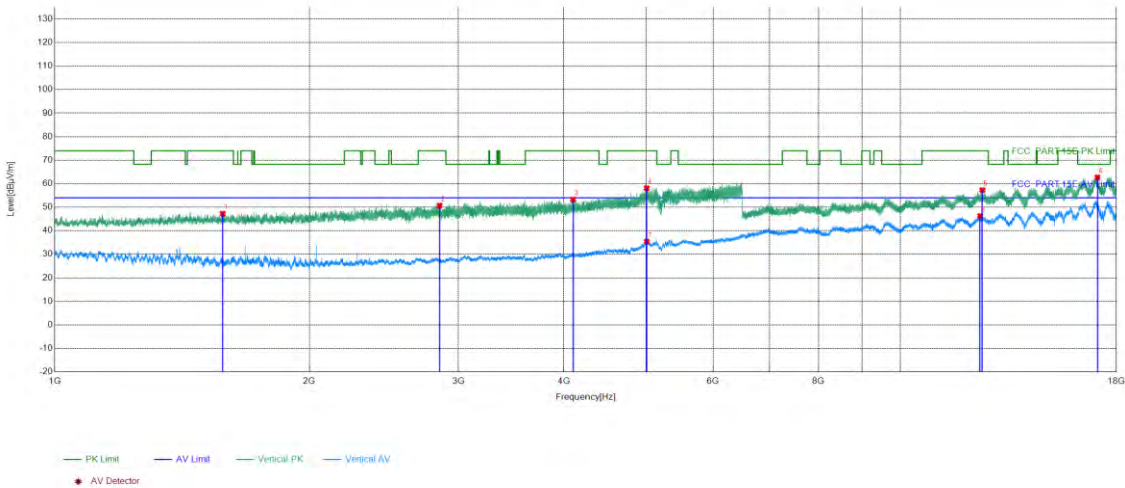

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1579.5032	13.69	33.60	47.29	74.00	26.71	PASS	Vertical	PK
2	2850.714	17.46	33.19	50.65	74.00	23.35	PASS	Vertical	PK
3	4100.144	21.92	31.37	53.29	74.00	20.71	PASS	Vertical	PK
4	5010.5404	25.19	32.93	58.12	74.00	15.88	PASS	Vertical	PK
5	12494.0997	4.36	52.93	57.29	74.00	16.71	PASS	Vertical	PK
6	17093.1797	12.26	50.42	62.68	68.20	5.52	PASS	Vertical	PK
7	5011.4205	25.18	10.24	35.42	54.00	18.58	PASS	Vertical	AV
8	12419.346	3.82	42.49	46.31	54.00	7.69	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5240Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

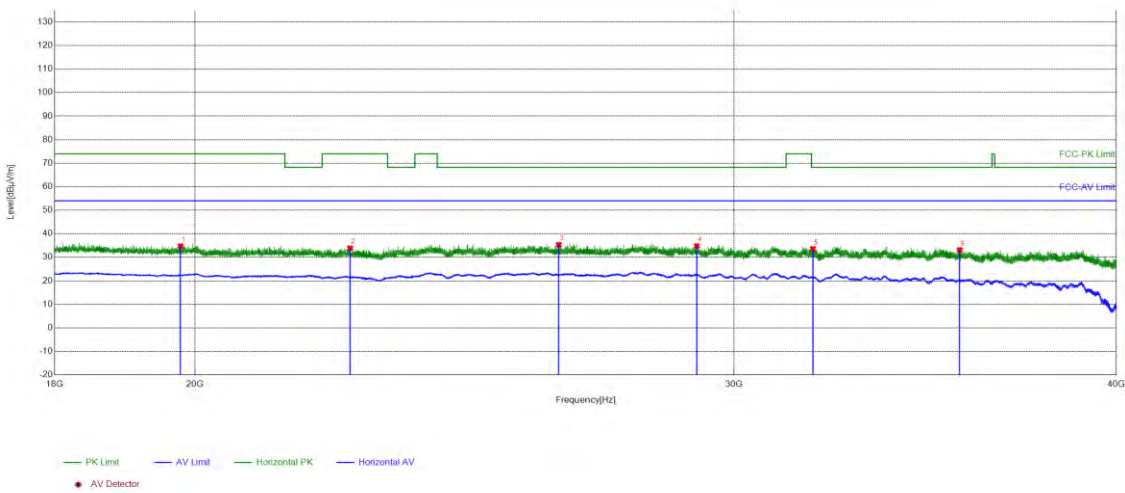

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	19785.5914	-25.25	59.99	34.74	74.00	39.26	PASS	Horizontal	PK
2	22477.6191	-25.06	58.94	33.88	74.00	40.12	PASS	Horizontal	PK
3	26295.2118	-21.27	56.59	35.32	68.20	32.88	PASS	Horizontal	PK
4	29174.687	-21.46	56.30	34.84	68.20	33.36	PASS	Horizontal	PK
5	31835.0334	-20.01	53.58	33.57	68.20	34.63	PASS	Horizontal	PK
6	35553.1821	-16.15	49.27	33.12	68.20	35.08	PASS	Horizontal	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5240Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

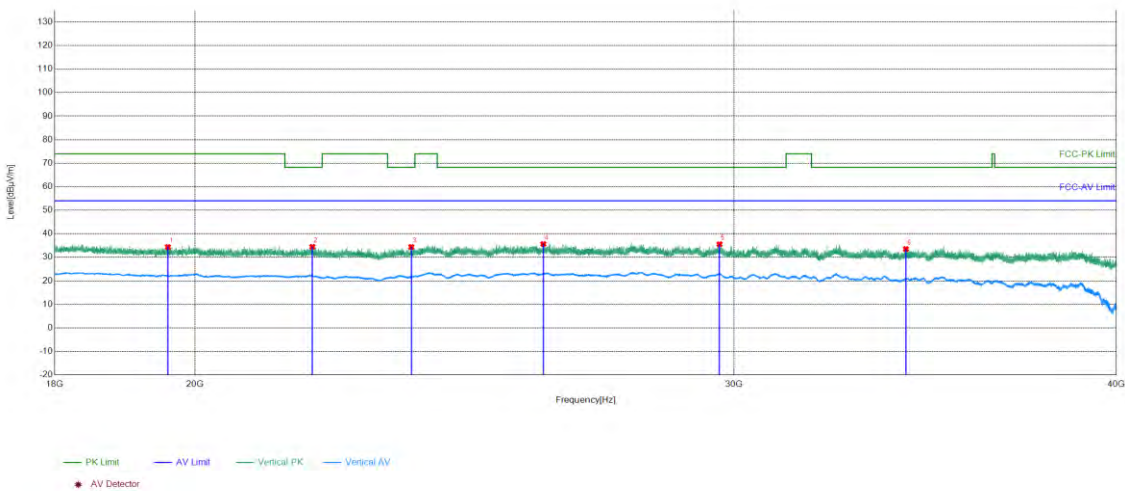

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	19597.2639	-25.59	59.98	34.39	74.00	39.61	PASS	Vertical	PK
2	21848.3939	-25.60	60.06	34.46	68.20	33.74	PASS	Vertical	PK
3	23535.4214	-23.23	57.62	34.39	68.20	33.81	PASS	Vertical	PK
4	25992.4797	-20.90	56.53	35.63	68.20	32.57	PASS	Vertical	PK
5	29675.427	-20.74	56.28	35.54	68.20	32.66	PASS	Vertical	PK
6	34142.4857	-17.53	51.03	33.50	68.20	34.70	PASS	Vertical	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5190Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

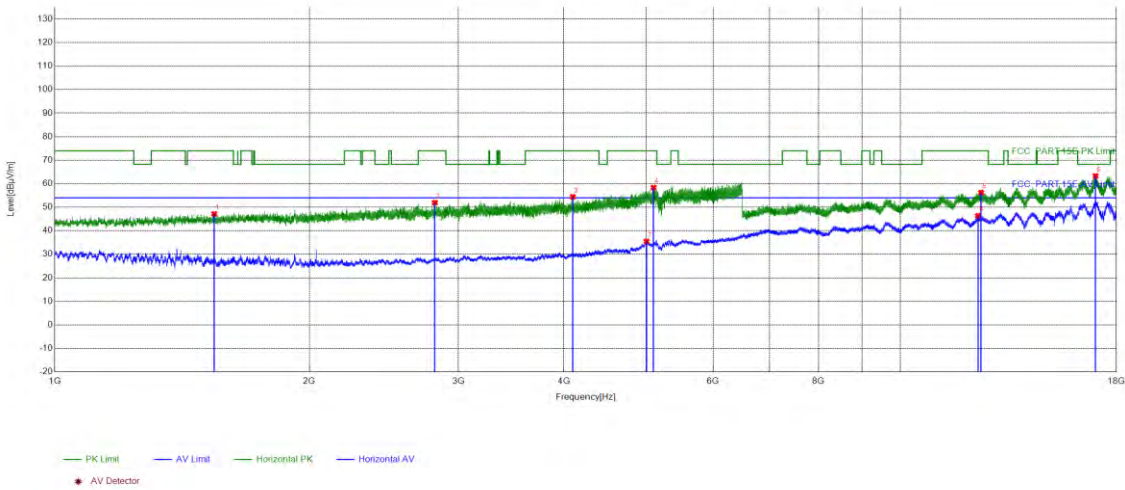

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1543.8618	13.62	33.51	47.13	74.00	26.87	PASS	Horizontal	PK
2	2814.1926	17.42	34.50	51.92	74.00	22.08	PASS	Horizontal	PK
3	4096.4039	22.00	32.42	54.42	74.00	19.58	PASS	Horizontal	PK
4	5105.5842	26.34	31.99	58.33	74.00	15.67	PASS	Horizontal	PK
5	12454.4227	3.41	52.82	56.23	74.00	17.77	PASS	Horizontal	PK
6	17003.4752	12.65	50.62	63.27	68.20	4.93	PASS	Horizontal	PK
7	5007.6803	25.15	10.29	35.44	54.00	18.56	PASS	Horizontal	AV
8	12344.0172	4.61	41.72	46.33	54.00	7.67	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5190Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

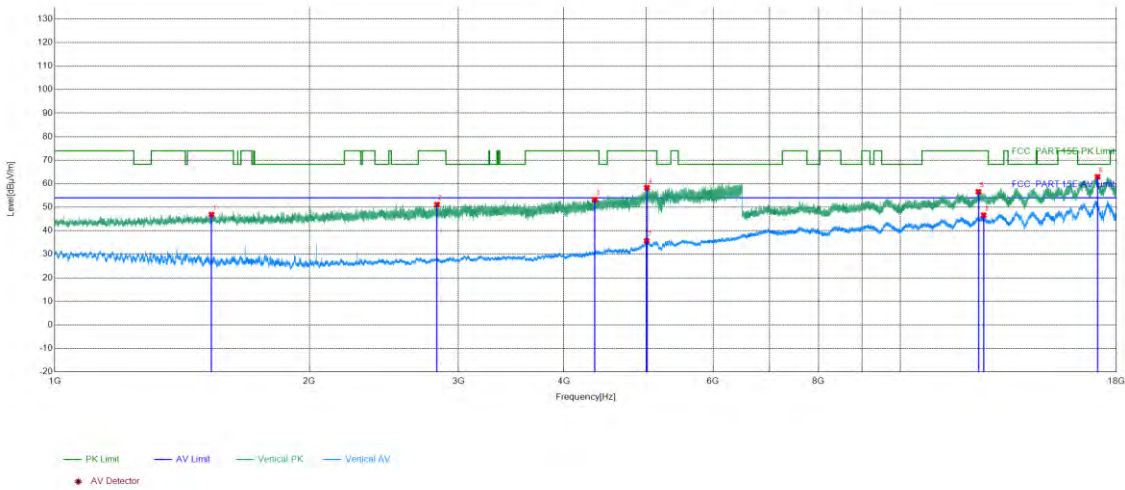

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1531.7613	13.63	33.25	46.88	74.00	27.12	PASS	Vertical	PK
2	2831.5733	17.44	33.68	51.12	74.00	22.88	PASS	Vertical	PK
3	4350.294	23.07	30.15	53.22	74.00	20.78	PASS	Vertical	PK
4	5014.0606	25.15	33.16	58.31	74.00	15.69	PASS	Vertical	PK
5	12364.1432	4.57	52.00	56.57	74.00	17.43	PASS	Vertical	PK
6	17100.655	12.25	50.69	62.94	68.20	5.26	PASS	Vertical	PK
7	5010.1004	25.20	10.49	35.69	54.00	18.31	PASS	Vertical	AV
8	12537.8019	4.95	41.67	46.62	54.00	7.38	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5190Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

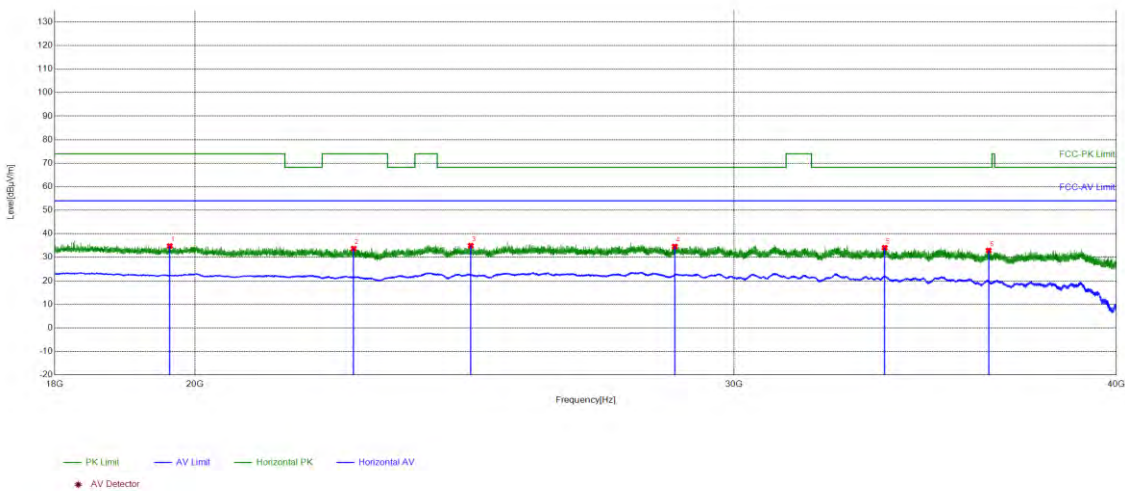

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19626.3051	-25.54	60.33	34.79	74.00	39.21	PASS	Horizontal	PK
2	22536.5815	-25.03	58.71	33.68	74.00	40.32	PASS	Horizontal	PK
3	24611.7045	-21.87	56.81	34.94	68.20	33.26	PASS	Horizontal	PK
4	28694.1878	-21.73	56.32	34.59	68.20	33.61	PASS	Horizontal	PK
5	33602.1441	-17.33	51.36	34.03	68.20	34.17	PASS	Horizontal	PK
6	36336.4135	-16.72	49.62	32.90	68.20	35.30	PASS	Horizontal	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5190Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

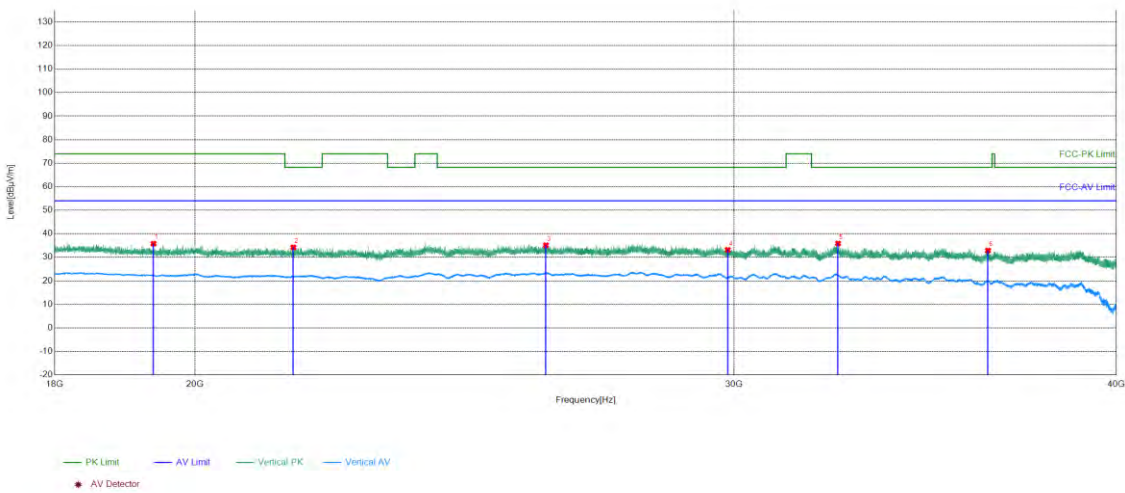

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19386.9355	-25.65	61.43	35.78	74.00	38.22	PASS	Vertical	PK
2	21537.7415	-25.78	59.98	34.20	68.20	34.00	PASS	Vertical	PK
3	26042.6417	-20.99	56.09	35.10	68.20	33.10	PASS	Vertical	PK
4	29861.9945	-21.00	54.15	33.15	68.20	35.05	PASS	Vertical	PK
5	32442.2577	-18.22	54.08	35.86	68.20	32.34	PASS	Vertical	PK
6	36315.2926	-16.73	49.60	32.87	68.20	35.33	PASS	Vertical	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5230Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

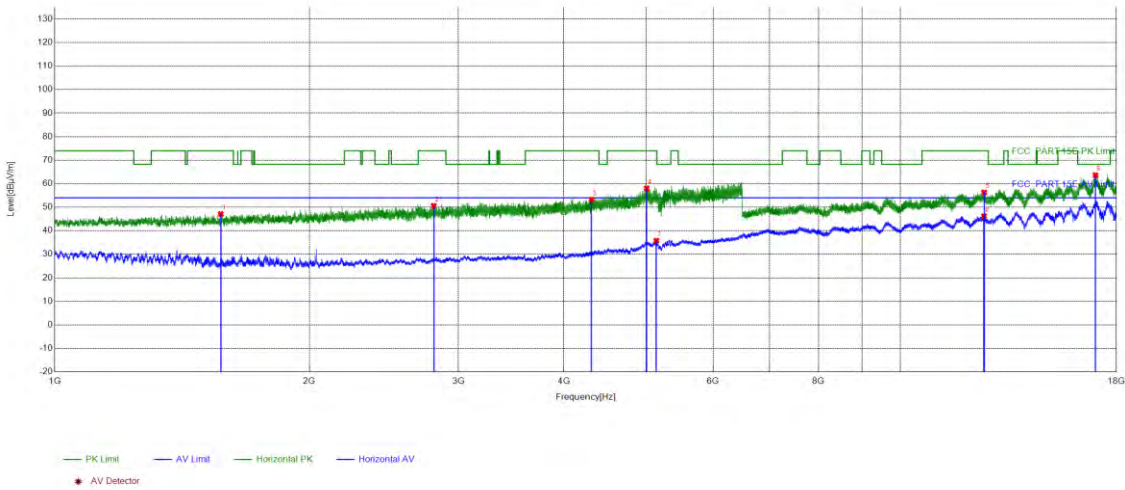

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1571.1428	13.64	33.47	47.11	74.00	26.89	PASS	Horizontal	PK
2	2806.2723	17.45	33.16	50.61	74.00	23.39	PASS	Horizontal	PK
3	4311.3525	22.77	30.48	53.25	74.00	20.75	PASS	Horizontal	PK
4	5010.5404	25.19	32.84	58.03	74.00	15.97	PASS	Horizontal	PK
5	12555.0528	5.01	51.28	56.29	74.00	17.71	PASS	Horizontal	PK
6	17001.1751	12.67	50.95	63.62	68.20	4.58	PASS	Horizontal	PK
7	5143.6457	27.49	8.29	35.78	54.00	18.22	PASS	Horizontal	AV
8	12552.1776	5.06	41.13	46.19	54.00	7.81	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5230Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

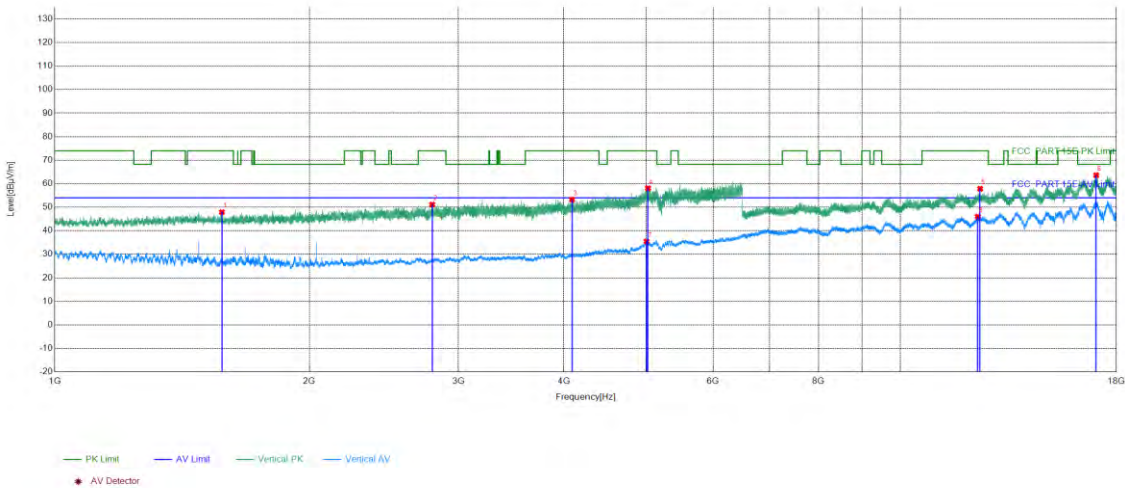

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1576.203	13.67	34.24	47.91	74.00	26.09	PASS	Vertical	PK
2	2793.9518	17.38	33.77	51.15	74.00	22.85	PASS	Vertical	PK
3	4087.6035	22.08	31.17	53.25	74.00	20.75	PASS	Vertical	PK
4	5027.4811	25.23	32.85	58.08	74.00	15.92	PASS	Vertical	PK
5	12417.6209	3.85	54.02	57.87	74.00	16.13	PASS	Vertical	PK
6	17036.8268	12.44	51.19	63.63	68.20	4.57	PASS	Vertical	PK
7	5008.7804	25.18	10.26	35.44	54.00	18.56	PASS	Vertical	AV
8	12342.2921	4.57	41.45	46.02	54.00	7.98	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5230Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

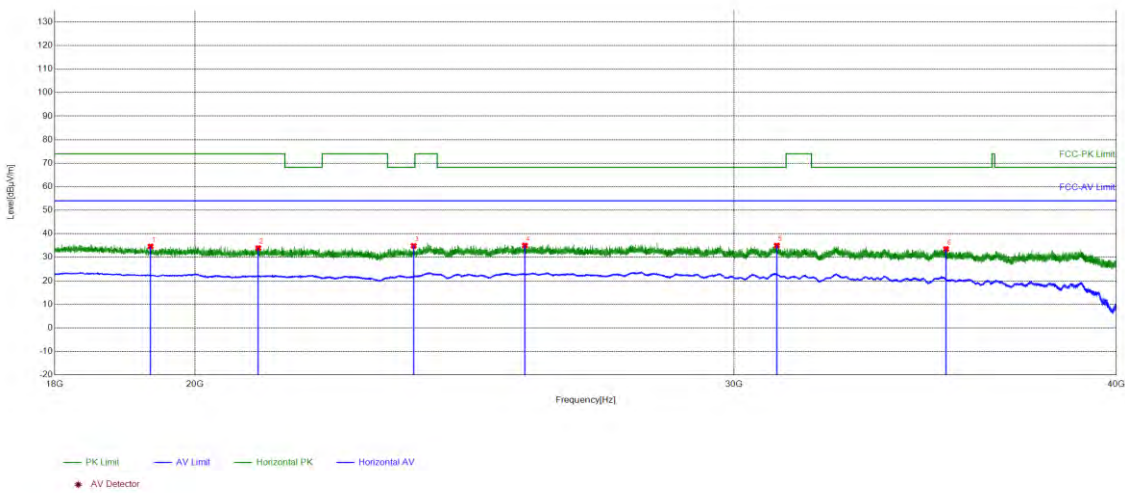

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19344.6938	-25.74	60.38	34.64	74.00	39.36	PASS	Horizontal	PK
2	20977.1591	-25.96	59.87	33.91	74.00	40.09	PASS	Horizontal	PK
3	23577.6631	-23.12	57.97	34.85	68.20	33.35	PASS	Horizontal	PK
4	25635.1854	-20.73	55.75	35.02	68.20	33.18	PASS	Horizontal	PK
5	30984.9194	-19.35	54.36	35.01	68.20	33.19	PASS	Horizontal	PK
6	35191.4877	-15.90	49.44	33.54	68.20	34.66	PASS	Horizontal	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5230Mhz
Remark:	\	Test_Date	2026/6/23

Test Graph

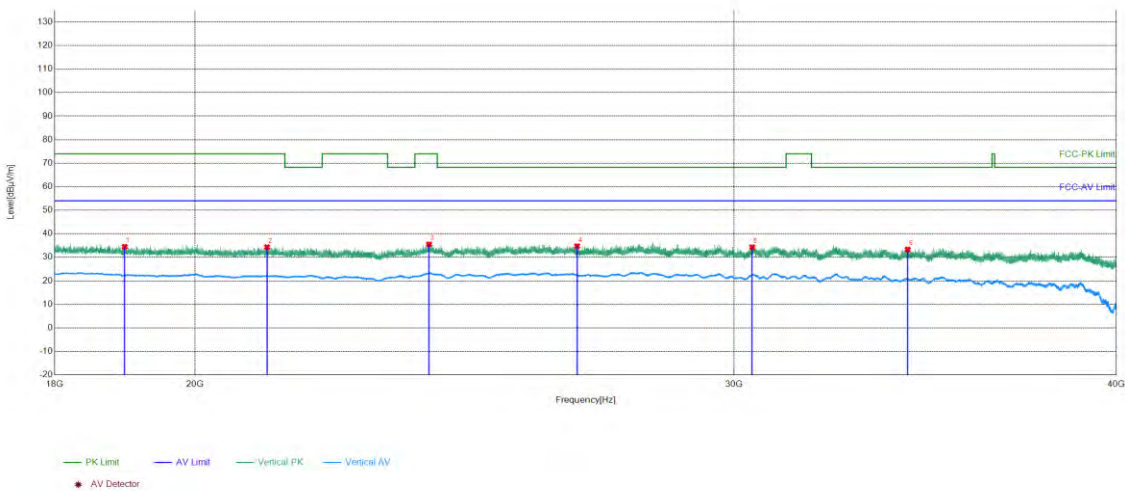


Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18971.5589	-26.27	60.73	34.46	74.00	39.54	PASS	Vertical	PK
2	21115.3246	-25.86	60.16	34.30	74.00	39.70	PASS	Vertical	PK
3	23851.3541	-22.23	57.74	35.51	74.00	38.49	PASS	Vertical	PK
4	26661.3065	-21.24	56.00	34.76	68.20	33.44	PASS	Vertical	PK
5	30416.4167	-20.35	54.63	34.28	68.20	33.92	PASS	Vertical	PK
6	34186.4875	-17.42	50.74	33.32	68.20	34.88	PASS	Vertical	PK

U-NII-2A:

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5260Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

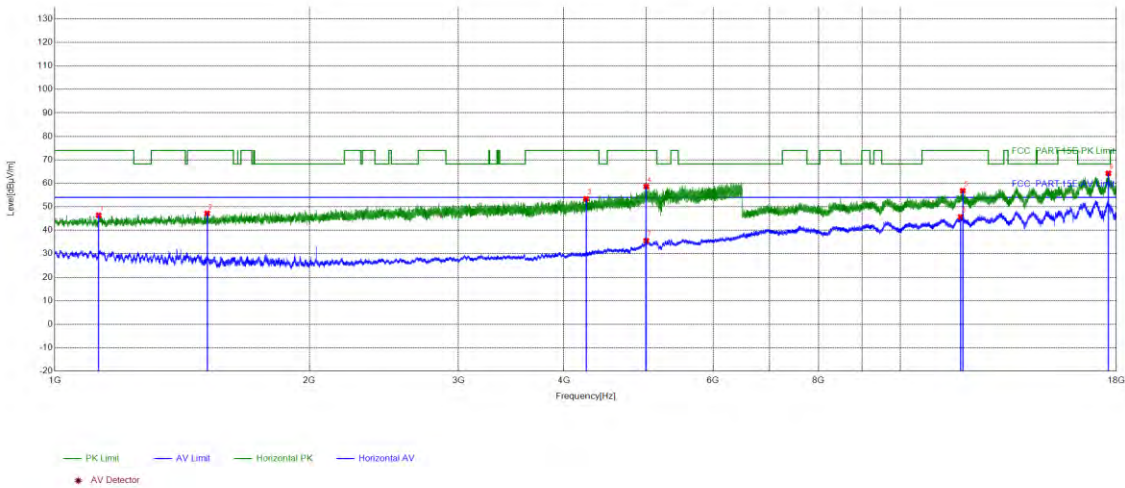

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1126.9451	11.50	34.87	46.37	74.00	27.63	PASS	Horizontal	PK
2	1514.1606	13.44	33.75	47.19	74.00	26.81	PASS	Horizontal	PK
3	4247.3299	22.59	30.76	53.35	74.00	20.65	PASS	Horizontal	PK
4	5005.0402	25.09	33.55	58.64	74.00	15.36	PASS	Horizontal	PK
5	11844.8922	3.02	53.79	56.81	74.00	17.19	PASS	Horizontal	PK
6	17609.5555	14.16	50.09	64.25	68.20	3.95	PASS	Horizontal	PK
7	5005.2602	25.10	10.41	35.51	54.00	18.49	PASS	Horizontal	AV
8	11778.1889	2.29	43.42	45.71	54.00	8.29	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5260Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

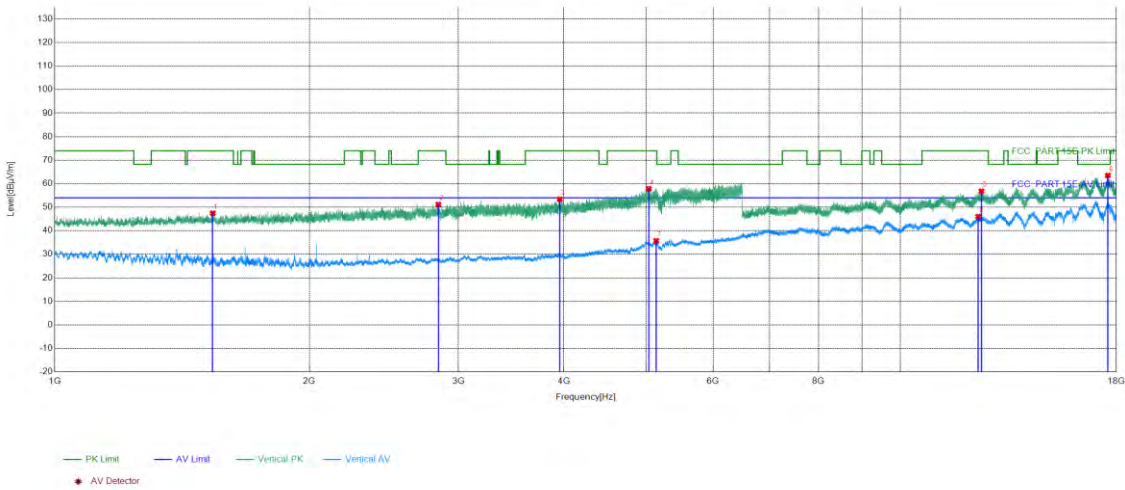

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1537.2615	13.63	33.81	47.44	74.00	26.56	PASS	Vertical	PK
2	2841.4737	17.56	33.63	51.19	74.00	22.81	PASS	Vertical	PK
3	3954.2782	21.57	31.80	53.37	74.00	20.63	PASS	Vertical	PK
4	5039.1416	25.39	32.44	57.83	74.00	16.17	PASS	Vertical	PK
5	12464.7732	3.66	53.11	56.77	74.00	17.23	PASS	Vertical	PK
6	17585.4043	14.05	49.45	63.50	68.20	4.70	PASS	Vertical	PK
7	5142.3257	27.48	8.25	35.73	54.00	18.27	PASS	Vertical	AV
8	12355.5178	4.68	41.34	46.02	54.00	7.98	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5260Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

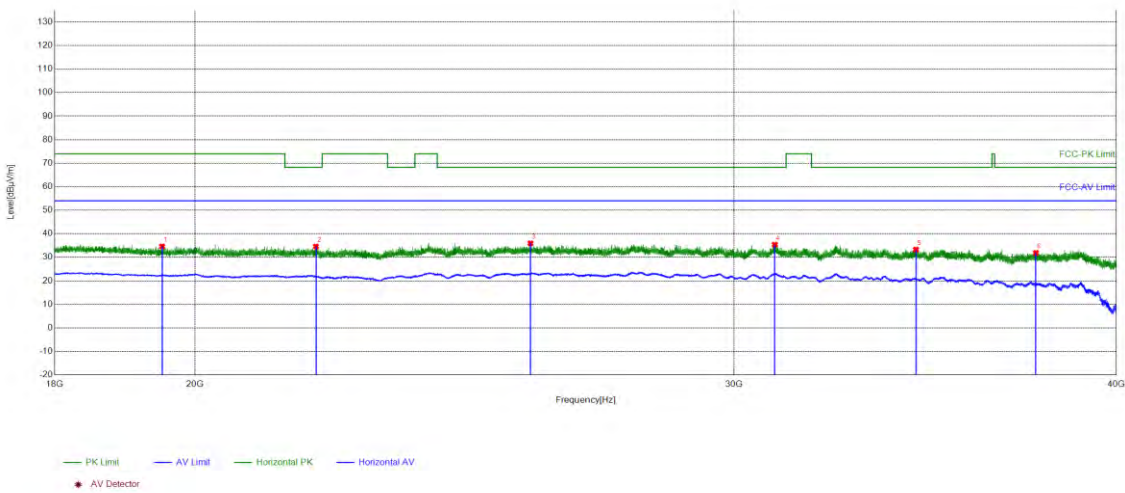

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19512.7805	-25.61	60.23	34.62	74.00	39.38	PASS	Horizontal	PK
2	21907.3563	-25.68	60.29	34.61	68.20	33.59	PASS	Horizontal	PK
3	25742.5497	-20.79	56.70	35.91	68.20	32.29	PASS	Horizontal	PK
4	30936.5175	-19.42	54.78	35.36	68.20	32.84	PASS	Horizontal	PK
5	34399.456	-17.21	50.51	33.30	68.20	34.90	PASS	Horizontal	PK
6	37646.7859	-14.95	46.81	31.86	68.20	36.34	PASS	Horizontal	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5260Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

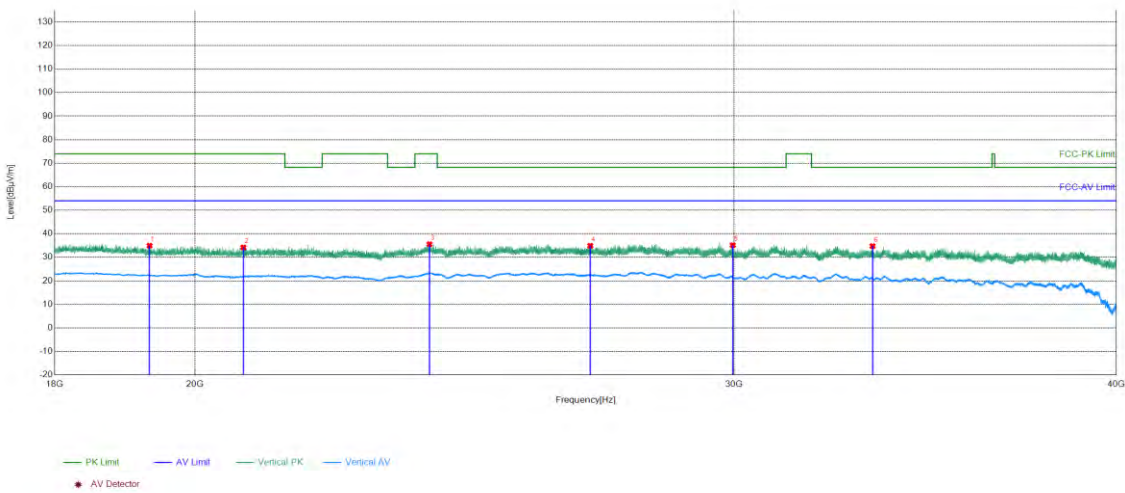

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	19329.7332	-25.77	60.71	34.94	74.00	39.06	PASS	Vertical	PK
2	20743.0697	-25.77	59.94	34.17	74.00	39.83	PASS	Vertical	PK
3	23860.1544	-22.22	57.75	35.53	74.00	38.47	PASS	Vertical	PK
4	26927.0771	-21.73	56.63	34.90	68.20	33.30	PASS	Vertical	PK
5	29973.759	-21.06	56.20	35.14	68.20	33.06	PASS	Vertical	PK
6	33295.8918	-18.19	52.94	34.75	68.20	33.45	PASS	Vertical	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5280Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

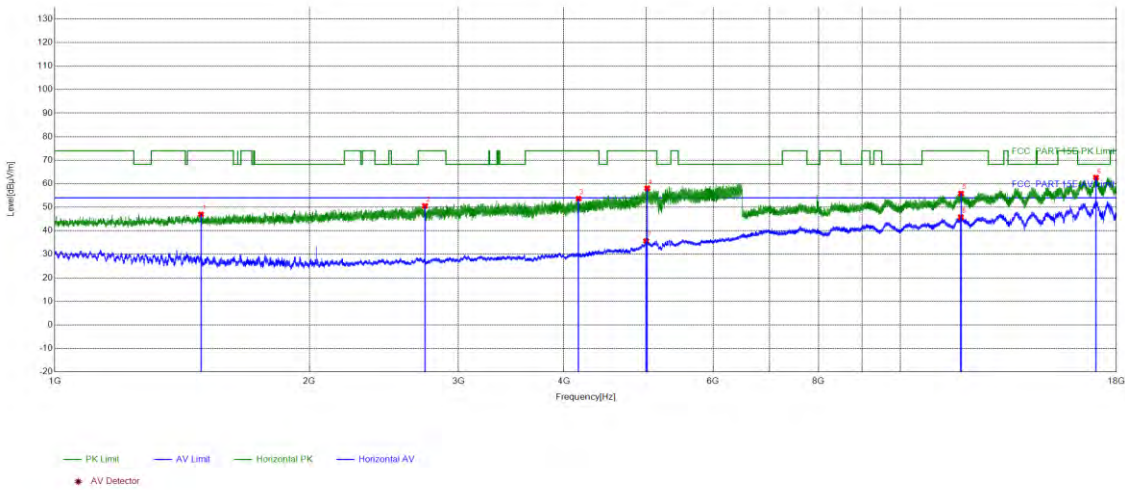

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1488.6395	13.48	33.49	46.97	74.00	27.03	PASS	Horizontal	PK
2	2740.0496	17.03	33.52	50.55	74.00	23.45	PASS	Horizontal	PK
3	4162.6265	22.20	31.44	53.64	74.00	20.36	PASS	Horizontal	PK
4	5018.0207	25.10	32.95	58.05	74.00	15.95	PASS	Horizontal	PK
5	11789.1145	2.25	53.59	55.84	74.00	18.16	PASS	Horizontal	PK
6	17028.2014	12.50	50.12	62.62	68.20	5.58	PASS	Horizontal	PK
7	5003.7201	25.06	10.56	35.62	54.00	18.38	PASS	Horizontal	AV
8	11783.3642	2.27	43.51	45.78	54.00	8.22	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5280Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

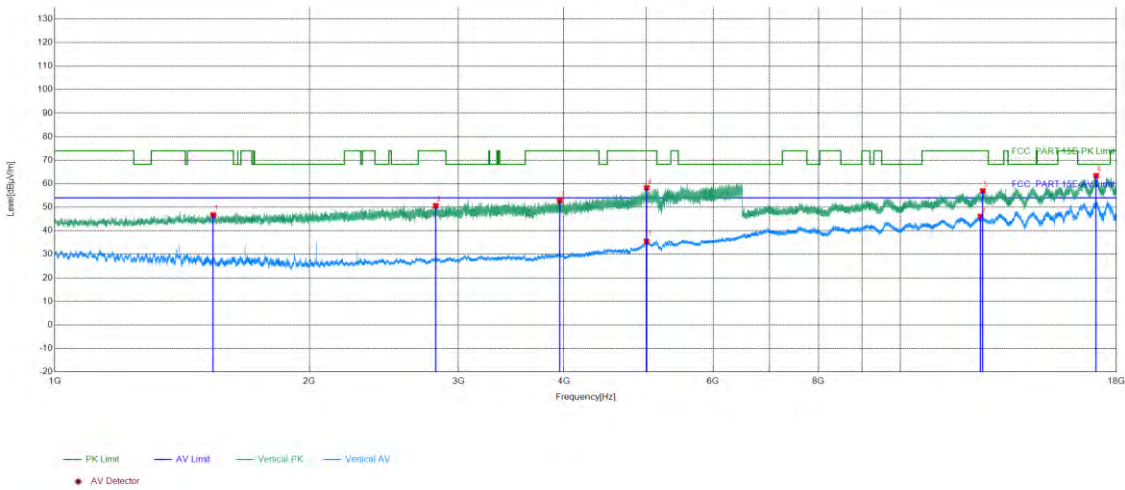

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1539.2416	13.63	33.14	46.77	74.00	27.23	PASS	Vertical	PK
2	2821.0128	17.32	33.31	50.63	74.00	23.37	PASS	Vertical	PK
3	3954.9382	21.57	31.29	52.86	74.00	21.14	PASS	Vertical	PK
4	5011.8605	25.17	33.11	58.28	74.00	15.72	PASS	Vertical	PK
5	12510.7755	4.63	52.32	56.95	74.00	17.05	PASS	Vertical	PK
6	17032.8016	12.46	50.94	63.40	68.20	4.80	PASS	Vertical	PK
7	5008.3403	25.17	10.31	35.48	54.00	18.52	PASS	Vertical	AV
8	12433.7217	3.58	42.54	46.12	54.00	7.88	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5280Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

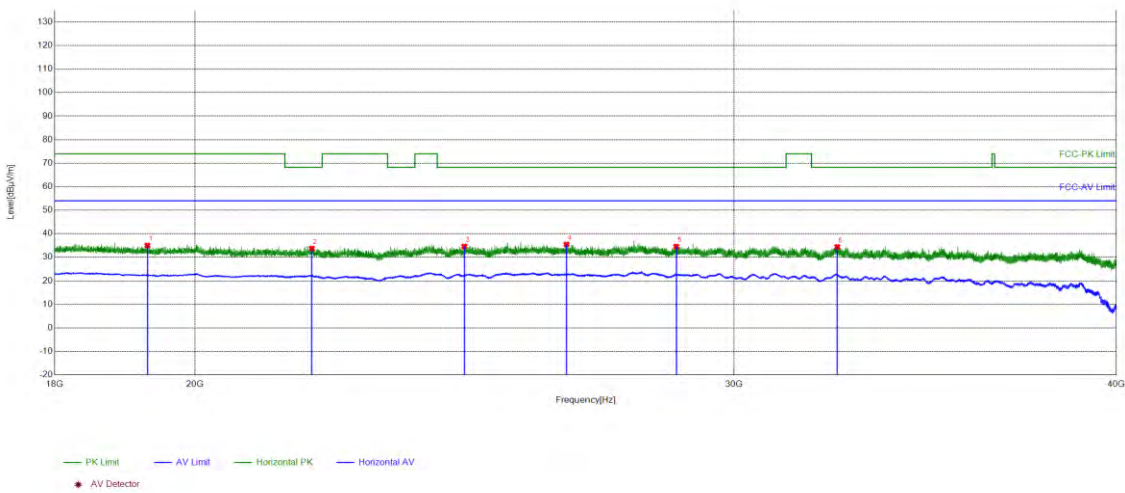

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	19298.932	-25.84	60.85	35.01	74.00	38.99	PASS	Horizontal	PK
2	21840.4736	-25.58	59.31	33.73	68.20	34.47	PASS	Horizontal	PK
3	24492.8997	-21.77	56.40	34.63	68.20	33.57	PASS	Horizontal	PK
4	26449.218	-21.15	56.62	35.47	68.20	32.73	PASS	Horizontal	PK
5	28725.869	-21.65	56.22	34.57	68.20	33.63	PASS	Horizontal	PK
6	32424.657	-18.14	52.56	34.42	68.20	33.78	PASS	Horizontal	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5280Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

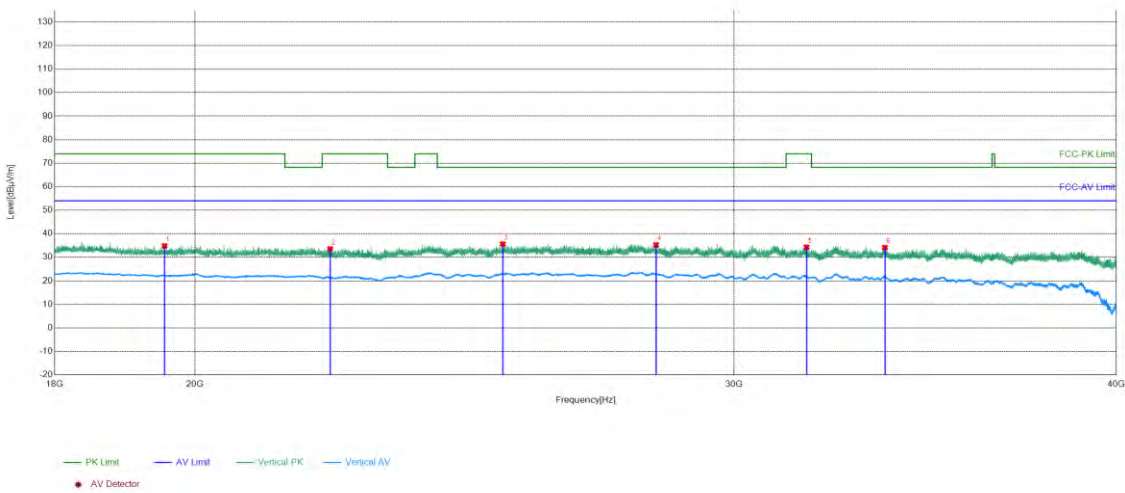

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19549.742	-25.60	60.44	34.84	74.00	39.16	PASS	Vertical	PK
2	22141.4457	-25.52	59.07	33.55	74.00	40.45	PASS	Vertical	PK
3	25212.7685	-21.07	56.69	35.62	68.20	32.58	PASS	Vertical	PK
4	28293.7718	-21.40	56.68	35.28	68.20	32.92	PASS	Vertical	PK
5	31683.6673	-19.74	54.03	34.29	74.00	39.71	PASS	Vertical	PK
6	33608.3043	-17.34	51.45	34.11	68.20	34.09	PASS	Vertical	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5320Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

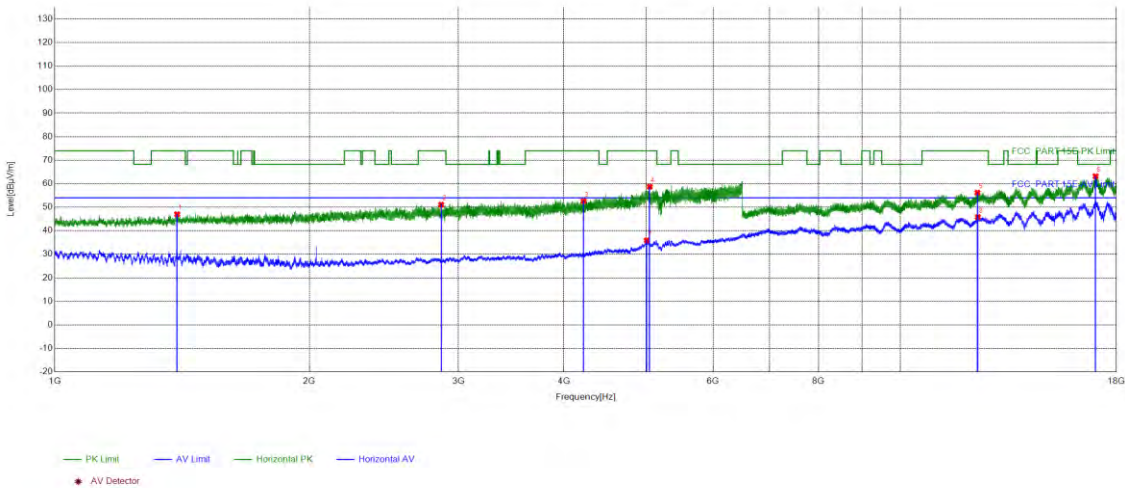

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1395.3558	12.84	34.16	47.00	74.00	27.00	PASS	Horizontal	PK
2	2863.2545	17.52	33.57	51.09	74.00	22.91	PASS	Horizontal	PK
3	4219.3888	22.38	30.26	52.64	74.00	21.36	PASS	Horizontal	PK
4	5051.6821	25.55	33.17	58.72	74.00	15.28	PASS	Horizontal	PK
5	12330.2165	4.30	51.92	56.22	74.00	17.78	PASS	Horizontal	PK
6	17008.0754	12.63	50.55	63.18	68.20	5.02	PASS	Horizontal	PK
7	5009.6604	25.19	10.69	35.88	54.00	18.12	PASS	Horizontal	AV
8	12341.7171	4.56	41.28	45.84	54.00	8.16	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5320Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

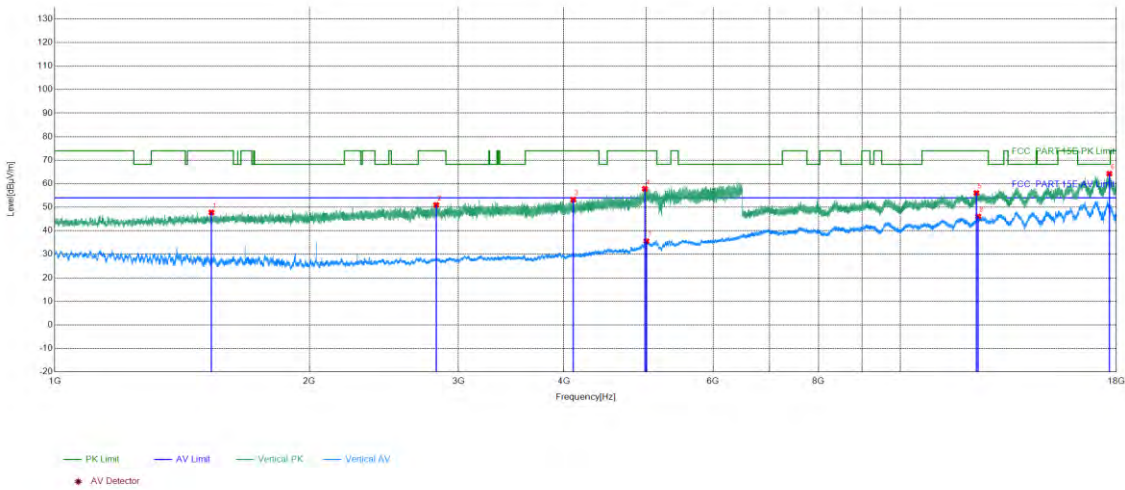

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1531.7613	13.63	34.15	47.78	74.00	26.22	PASS	Vertical	PK
2	2824.753	17.36	33.59	50.95	74.00	23.05	PASS	Vertical	PK
3	4102.7841	21.85	31.39	53.24	74.00	20.76	PASS	Vertical	PK
4	4985.2394	24.87	32.94	57.81	74.00	16.19	PASS	Vertical	PK
5	12293.4147	3.57	52.49	56.06	74.00	17.94	PASS	Vertical	PK
6	17656.7078	14.50	49.75	64.25	68.20	3.95	PASS	Vertical	PK
7	5006.1402	25.11	10.48	35.59	54.00	18.41	PASS	Vertical	AV
8	12354.3677	4.70	41.44	46.14	54.00	7.86	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5320Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

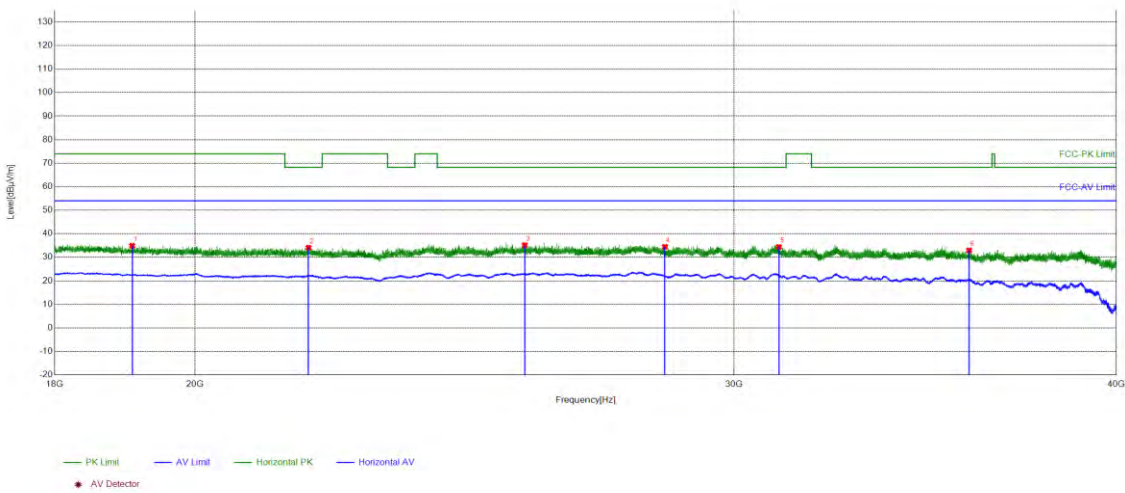

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19078.9232	-26.18	61.09	34.91	74.00	39.09	PASS	Horizontal	PK
2	21785.0314	-25.54	59.61	34.07	68.20	34.13	PASS	Horizontal	PK
3	25632.5453	-20.72	55.89	35.17	68.20	33.03	PASS	Horizontal	PK
4	28482.0993	-21.68	56.14	34.46	68.20	33.74	PASS	Horizontal	PK
5	31031.5613	-19.44	53.83	34.39	68.20	33.81	PASS	Horizontal	PK
6	35804.8722	-16.77	49.73	32.96	68.20	35.24	PASS	Horizontal	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5320Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

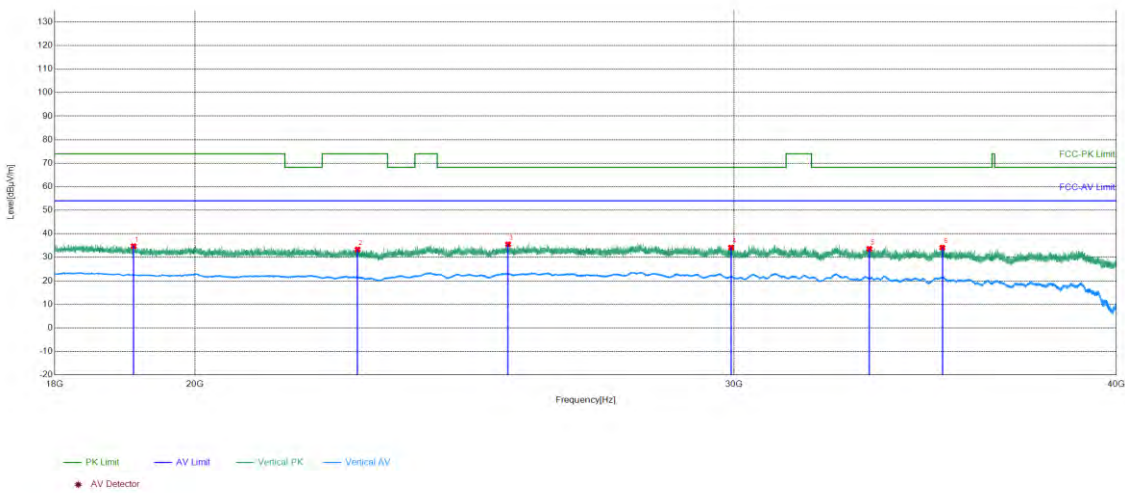

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	19099.164	-26.17	60.91	34.74	74.00	39.26	PASS	Vertical	PK
2	22603.4641	-25.00	58.35	33.35	74.00	40.65	PASS	Vertical	PK
3	25313.9726	-21.27	56.78	35.51	68.20	32.69	PASS	Vertical	PK
4	29935.0374	-21.04	55.17	34.13	68.20	34.07	PASS	Vertical	PK
5	33216.6887	-18.22	51.77	33.55	68.20	34.65	PASS	Vertical	PK
6	35091.1636	-16.01	50.12	34.11	68.20	34.09	PASS	Vertical	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5270Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

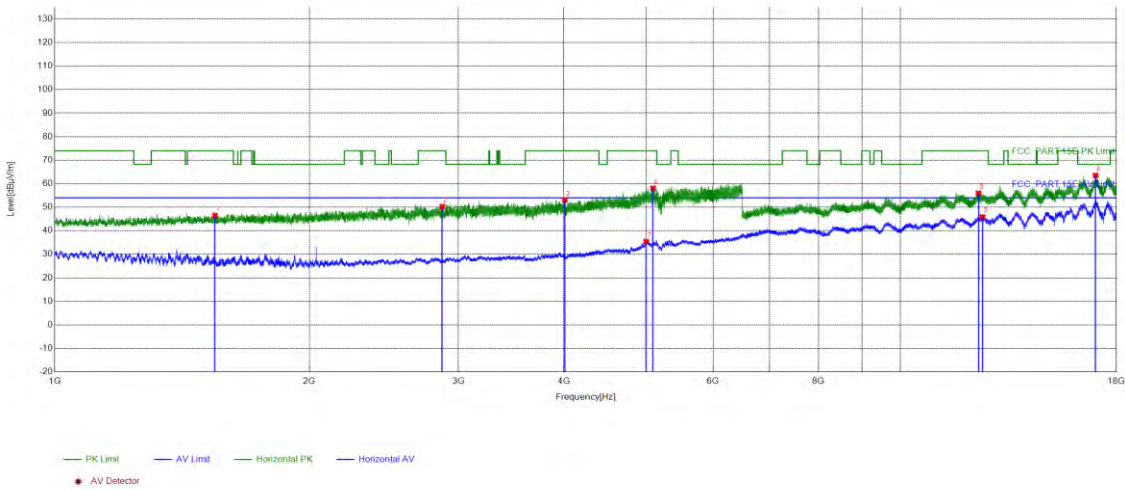

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1546.7219	13.62	32.85	46.47	74.00	27.53	PASS	Horizontal	PK
2	2870.9548	17.50	32.78	50.28	74.00	23.72	PASS	Horizontal	PK
3	4009.0604	21.54	31.53	53.07	74.00	20.93	PASS	Horizontal	PK
4	5097.6639	26.04	32.00	58.04	74.00	15.96	PASS	Horizontal	PK
5	12365.2933	4.56	51.42	55.98	74.00	18.02	PASS	Horizontal	PK
6	17008.0754	12.63	50.87	63.50	68.20	4.70	PASS	Horizontal	PK
7	5005.2602	25.10	10.29	35.39	54.00	18.61	PASS	Horizontal	AV
8	12497.5499	4.44	41.46	45.90	54.00	8.10	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5270Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

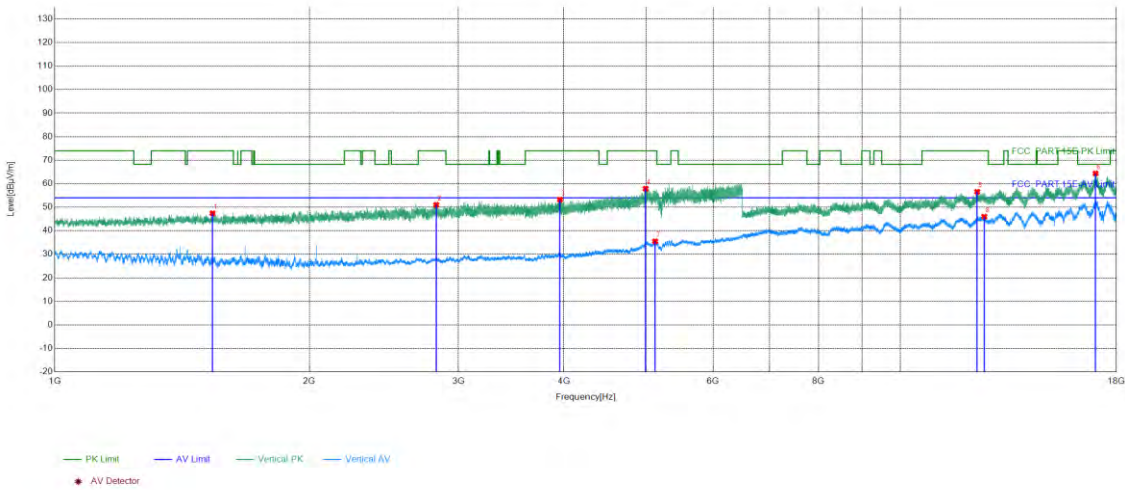

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1536.6015	13.63	33.77	47.40	74.00	26.60	PASS	Vertical	PK
2	2824.753	17.36	33.64	51.00	74.00	23.00	PASS	Vertical	PK
3	3956.6983	21.59	31.66	53.25	74.00	20.75	PASS	Vertical	PK
4	4994.6998	24.94	32.96	57.90	74.00	16.10	PASS	Vertical	PK
5	12322.1661	4.11	52.46	56.57	74.00	17.43	PASS	Vertical	PK
6	17002.3251	12.66	51.70	64.36	68.20	3.84	PASS	Vertical	PK
7	5126.4851	27.45	8.03	35.48	54.00	18.52	PASS	Vertical	AV
8	12561.3781	4.89	41.12	46.01	54.00	7.99	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5270Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

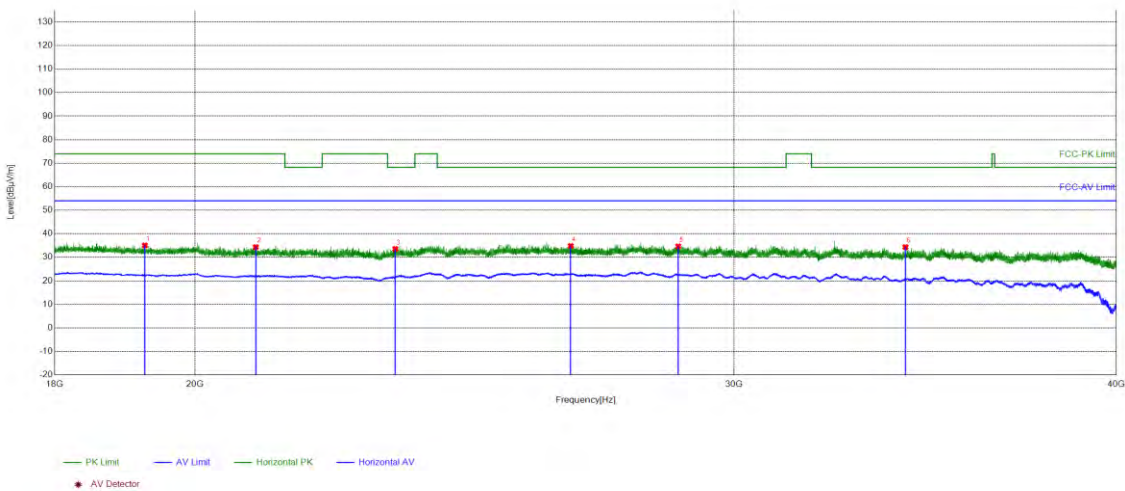

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19261.9705	-25.93	60.97	35.04	74.00	38.96	PASS	Horizontal	PK
2	20936.6775	-25.89	60.23	34.34	74.00	39.66	PASS	Horizontal	PK
3	23254.6902	-24.08	57.63	33.55	68.20	34.65	PASS	Horizontal	PK
4	26534.5814	-21.13	55.95	34.82	68.20	33.38	PASS	Horizontal	PK
5	28770.7508	-21.55	56.24	34.69	68.20	33.51	PASS	Horizontal	PK
6	34131.0452	-17.56	51.89	34.33	68.20	33.87	PASS	Horizontal	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5270Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

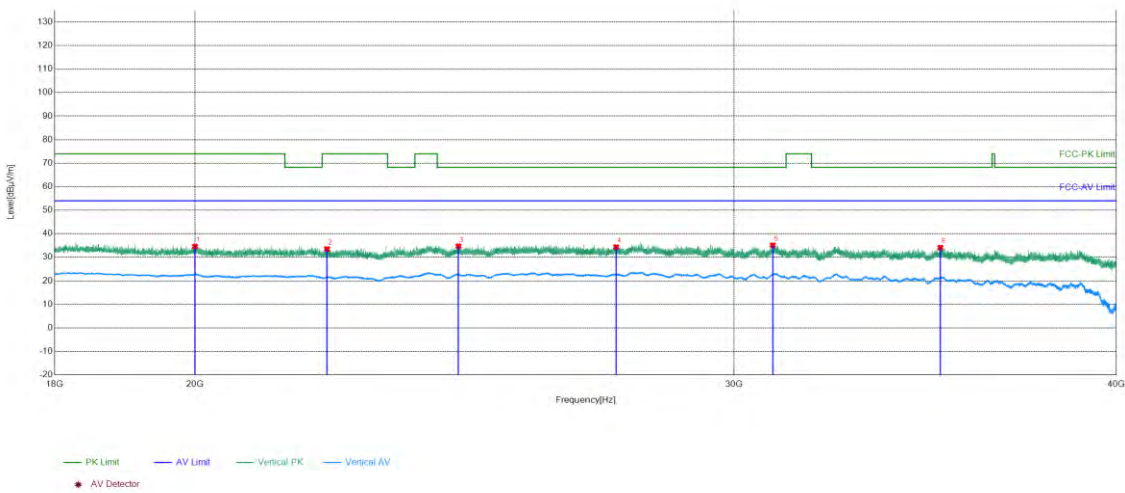

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	20002.9601	-24.63	59.24	34.61	74.00	39.39	PASS	Vertical	PK
2	22089.5236	-25.63	59.14	33.51	74.00	40.49	PASS	Vertical	PK
3	24386.4155	-21.75	56.47	34.72	68.20	33.48	PASS	Vertical	PK
4	27458.6183	-21.62	55.97	34.35	68.20	33.85	PASS	Vertical	PK
5	30886.3555	-19.50	54.64	35.14	68.20	33.06	PASS	Vertical	PK
6	35037.4815	-16.07	50.17	34.10	68.20	34.10	PASS	Vertical	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5310Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

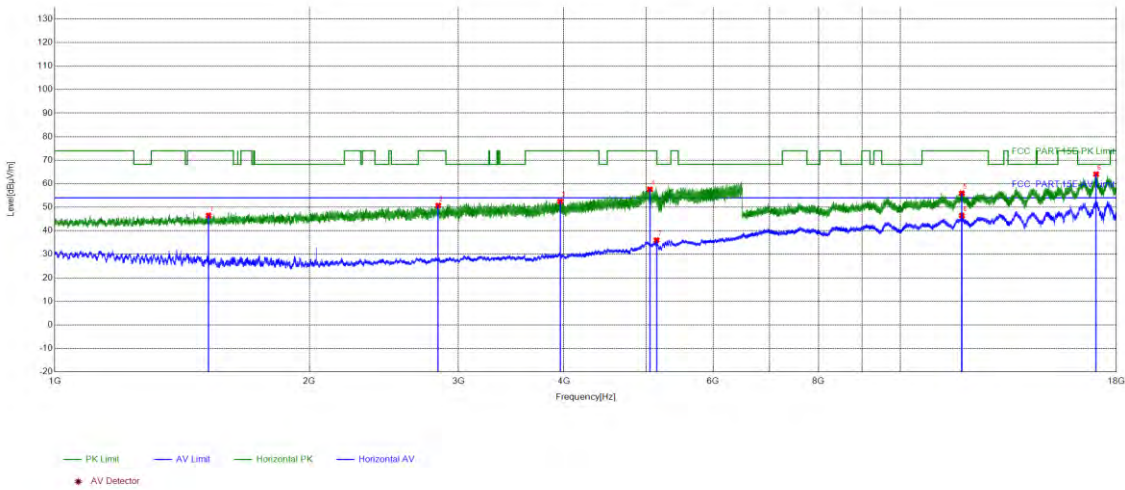

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1520.1008	13.46	33.03	46.49	74.00	27.51	PASS	Horizontal	PK
2	2840.3736	17.57	33.16	50.73	74.00	23.27	PASS	Horizontal	PK
3	3959.1184	21.61	30.86	52.47	74.00	21.53	PASS	Horizontal	PK
4	5054.1022	25.57	32.05	57.62	74.00	16.38	PASS	Horizontal	PK
5	11817.2909	2.53	53.40	55.93	74.00	18.07	PASS	Horizontal	PK
6	17034.5267	12.45	51.58	64.03	68.20	4.17	PASS	Horizontal	PK
7	5147.3859	27.49	8.52	36.01	54.00	17.99	PASS	Horizontal	AV
8	11817.8659	2.54	43.90	46.44	54.00	7.56	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5310Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

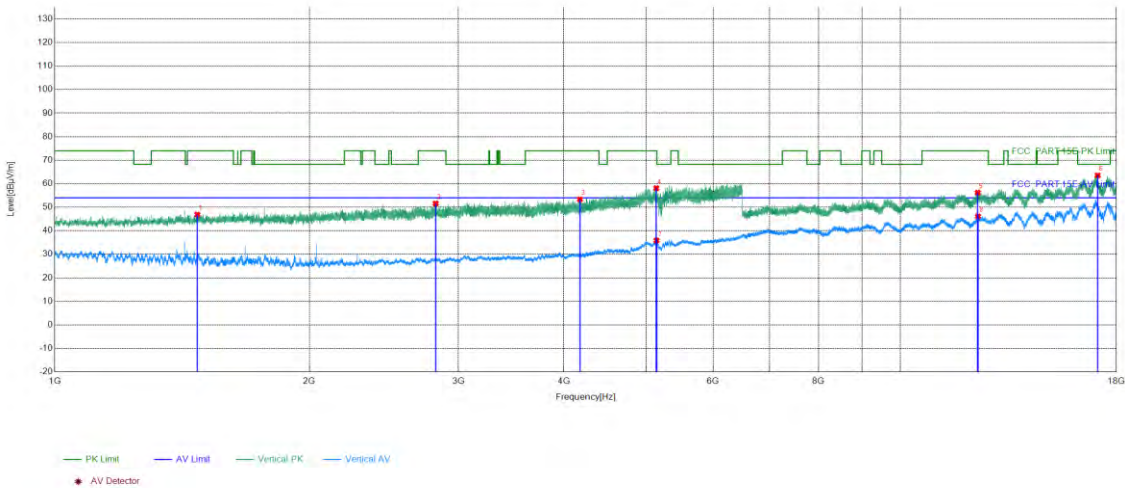

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1474.339	13.25	33.63	46.88	74.00	27.12	PASS	Vertical	PK
2	2820.7928	17.32	34.26	51.58	74.00	22.42	PASS	Vertical	PK
3	4177.3671	22.28	31.08	53.36	74.00	20.64	PASS	Vertical	PK
4	5143.8658	27.49	30.59	58.08	74.00	15.92	PASS	Vertical	PK
5	12339.417	4.51	51.69	56.20	74.00	17.80	PASS	Vertical	PK
6	17105.2553	12.29	51.24	63.53	68.20	4.67	PASS	Vertical	PK
7	5145.8458	27.49	8.38	35.87	54.00	18.13	PASS	Vertical	AV
8	12345.7423	4.65	41.46	46.11	54.00	7.89	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5310Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

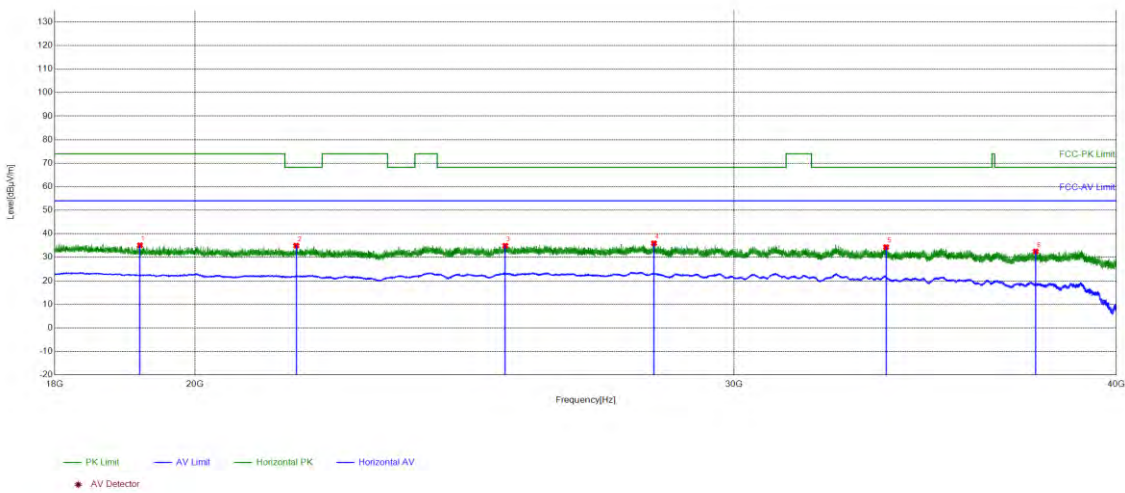

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19191.5677	-26.07	61.19	35.12	74.00	38.88	PASS	Horizontal	PK
2	21584.3834	-25.75	60.70	34.95	68.20	33.25	PASS	Horizontal	PK
3	25259.4104	-21.16	56.07	34.91	68.20	33.29	PASS	Horizontal	PK
4	28249.77	-21.35	57.29	35.94	68.20	32.26	PASS	Horizontal	PK
5	33637.3455	-17.42	51.74	34.32	68.20	33.88	PASS	Horizontal	PK
6	37641.5057	-14.94	47.42	32.48	68.20	35.72	PASS	Horizontal	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5310Mhz
Remark:	\	Test_Date	2026/6/23

Test Graph

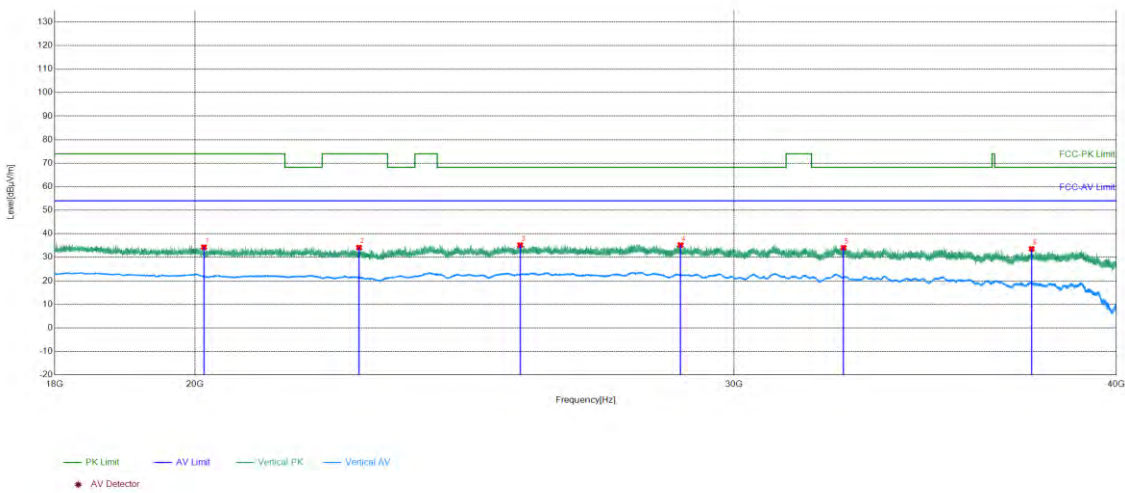


Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	20136.7255	-25.23	59.51	34.28	74.00	39.72	PASS	Vertical	PK
2	22628.9852	-25.00	59.12	34.12	74.00	39.88	PASS	Vertical	PK
3	25544.5418	-20.91	56.09	35.18	68.20	33.02	PASS	Vertical	PK
4	28820.0328	-21.46	56.65	35.19	68.20	33.01	PASS	Vertical	PK
5	32578.6631	-18.84	52.89	34.05	68.20	34.15	PASS	Vertical	PK
6	37530.6212	-15.18	48.75	33.57	68.20	34.63	PASS	Vertical	PK

U-NII-2C:

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5500Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

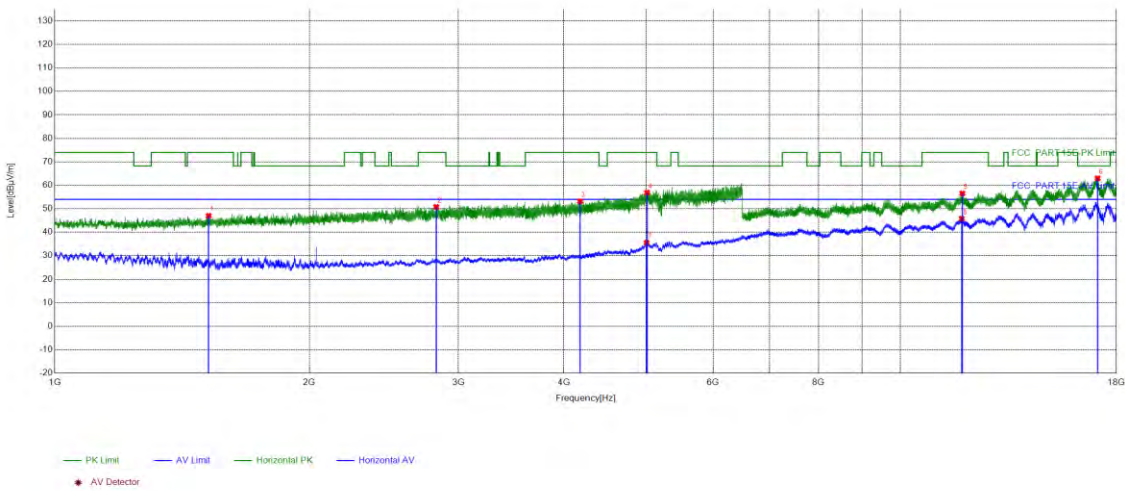

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1520.5408	13.47	33.54	47.01	74.00	26.99	PASS	Horizontal	PK
2	2824.753	17.36	33.43	50.79	74.00	23.21	PASS	Horizontal	PK
3	4178.9072	22.32	30.87	53.19	74.00	20.81	PASS	Horizontal	PK
4	5015.8206	25.12	31.75	56.87	74.00	17.13	PASS	Horizontal	PK
5	11832.2416	2.80	53.74	56.54	74.00	17.46	PASS	Horizontal	PK
6	17103.5302	12.27	50.69	62.96	68.20	5.24	PASS	Horizontal	PK
7	5009.2204	25.18	10.33	35.51	54.00	18.49	PASS	Horizontal	AV
8	11815.5658	2.50	43.29	45.79	54.00	8.21	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5500Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

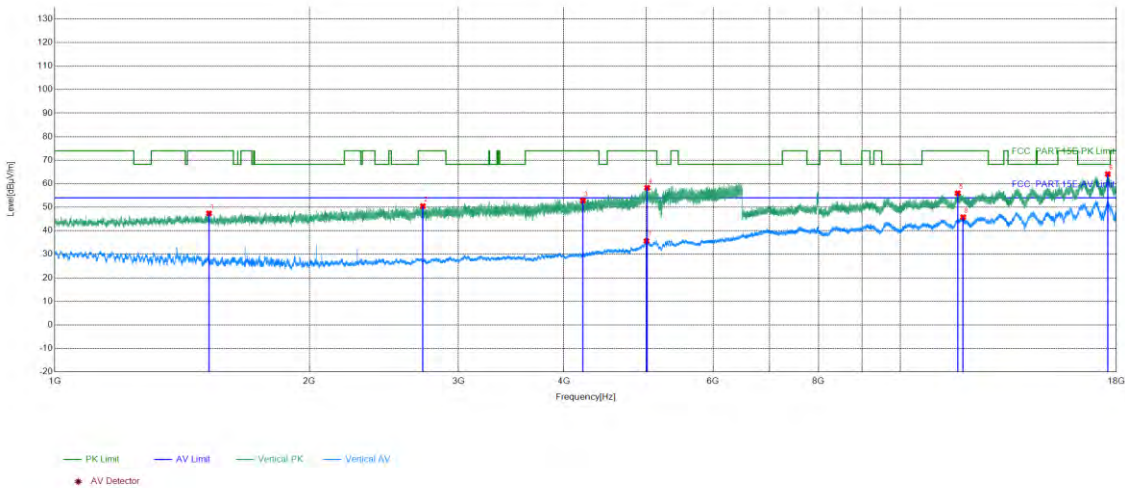

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1521.8609	13.49	33.89	47.38	74.00	26.62	PASS	Vertical	PK
2	2723.989	17.24	33.22	50.46	74.00	23.54	PASS	Vertical	PK
3	4212.1285	22.29	30.52	52.81	74.00	21.19	PASS	Vertical	PK
4	5017.8007	25.10	33.18	58.28	74.00	15.72	PASS	Vertical	PK
5	11685.6093	2.95	53.02	55.97	74.00	18.03	PASS	Vertical	PK
6	17580.804	14.03	50.07	64.10	68.20	4.10	PASS	Vertical	PK
7	5007.6803	25.15	10.48	35.63	54.00	18.37	PASS	Vertical	AV
8	11857.5429	3.10	42.67	45.77	54.00	8.23	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5500Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

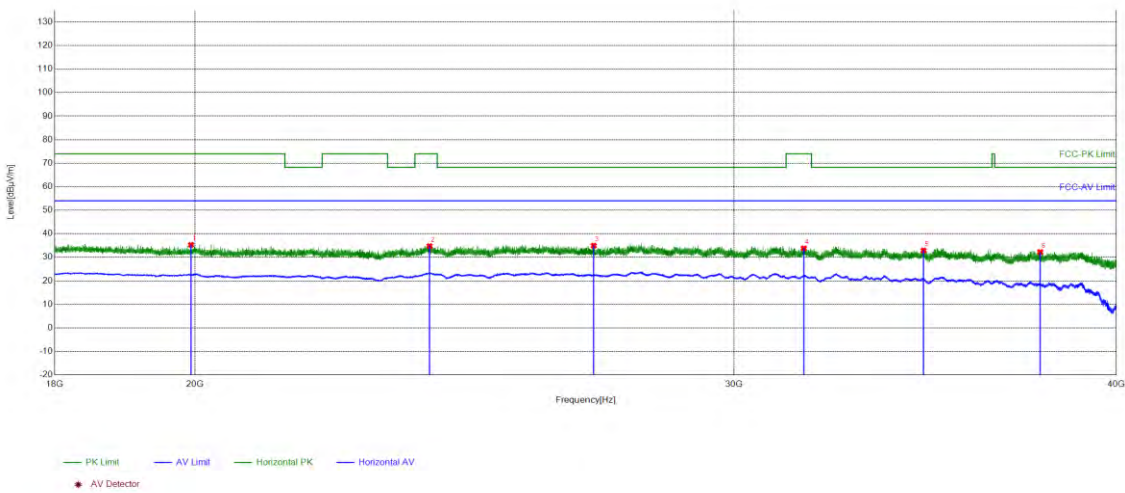

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19942.2377	-24.79	60.05	35.26	74.00	38.74	PASS	Horizontal	PK
2	23861.9145	-22.21	56.97	34.76	74.00	39.24	PASS	Horizontal	PK
3	26996.5999	-21.82	56.76	34.94	68.20	33.26	PASS	Horizontal	PK
4	31617.6647	-19.65	53.47	33.82	74.00	40.18	PASS	Horizontal	PK
5	34600.104	-16.09	49.01	32.92	68.20	35.28	PASS	Horizontal	PK
6	37769.9908	-15.24	47.46	32.22	68.20	35.98	PASS	Horizontal	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5500Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

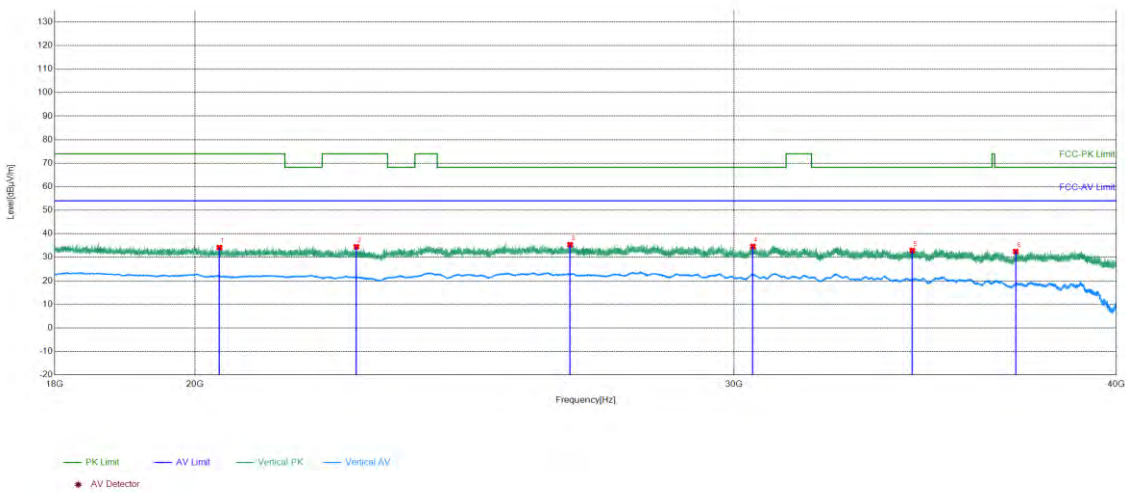

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	20372.5749	-25.48	59.61	34.13	74.00	39.87	PASS	Vertical	PK
2	22584.9834	-25.01	59.49	34.48	74.00	39.52	PASS	Vertical	PK
3	26521.3809	-21.13	56.47	35.34	68.20	32.86	PASS	Vertical	PK
4	30430.4972	-20.37	54.98	34.61	68.20	33.59	PASS	Vertical	PK
5	34308.8124	-17.29	50.20	32.91	68.20	35.29	PASS	Vertical	PK
6	37080.9232	-16.82	49.30	32.48	68.20	35.72	PASS	Vertical	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5580Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

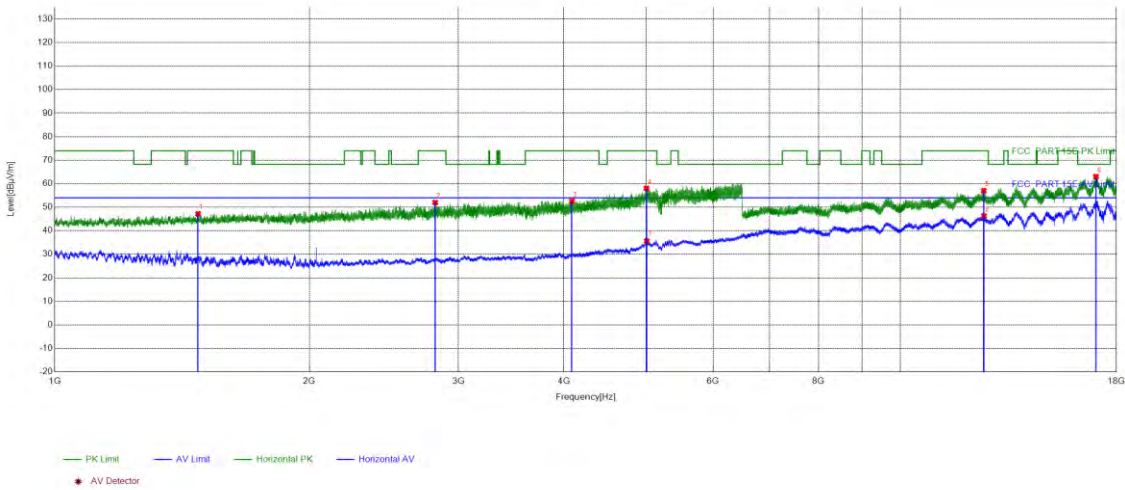

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1476.9791	13.24	33.98	47.22	74.00	26.78	PASS	Horizontal	PK
2	2817.0527	17.37	34.64	52.01	74.00	21.99	PASS	Horizontal	PK
3	4087.1635	22.07	30.54	52.61	74.00	21.39	PASS	Horizontal	PK
4	5007.6803	25.15	32.87	58.02	74.00	15.98	PASS	Horizontal	PK
5	12542.4021	5.00	52.02	57.02	74.00	16.98	PASS	Horizontal	PK
6	17027.0514	12.50	50.48	62.98	68.20	5.22	PASS	Horizontal	PK
7	5012.3005	25.17	10.44	35.61	54.00	18.39	PASS	Horizontal	AV
8	12550.4525	5.09	41.17	46.26	54.00	7.74	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5580Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

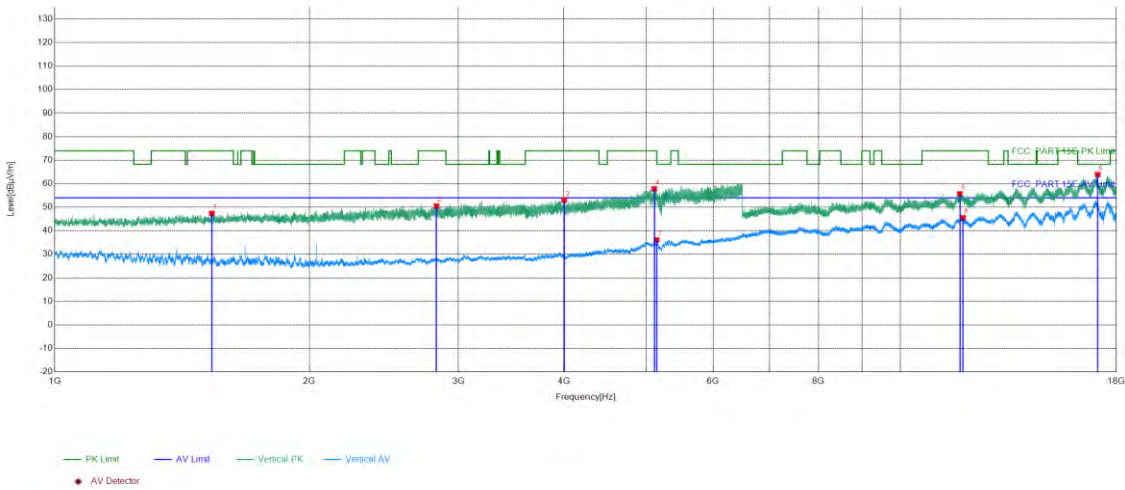

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1533.3013	13.63	33.73	47.36	74.00	26.64	PASS	Vertical	PK
2	2826.9531	17.38	33.12	50.50	74.00	23.50	PASS	Vertical	PK
3	4002.0201	21.54	31.52	53.06	74.00	20.94	PASS	Vertical	PK
4	5115.0446	26.78	31.06	57.84	74.00	16.16	PASS	Vertical	PK
5	11753.4627	2.35	53.35	55.70	74.00	18.30	PASS	Vertical	PK
6	17105.8303	12.29	51.61	63.90	68.20	4.30	PASS	Vertical	PK
7	5146.7259	27.49	8.59	36.08	54.00	17.92	PASS	Vertical	AV
8	11855.2428	3.10	42.44	45.54	54.00	8.46	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5580Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

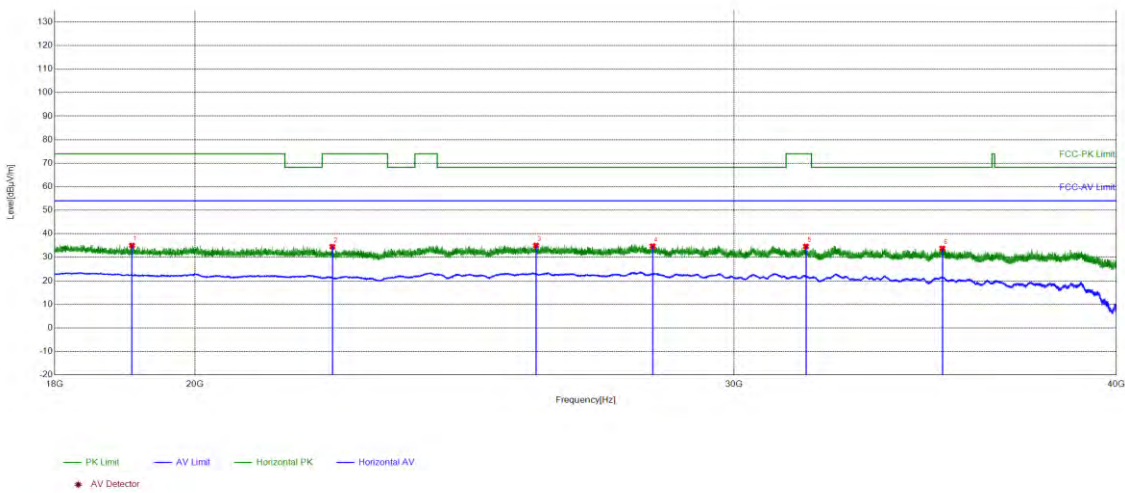

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	19076.2831	-26.19	61.20	35.01	74.00	38.99	PASS	Horizontal	PK
2	22179.2872	-25.44	59.95	34.51	74.00	39.49	PASS	Horizontal	PK
3	25849.914	-20.84	55.87	35.03	68.20	33.17	PASS	Horizontal	PK
4	28220.7288	-21.32	56.06	34.74	68.20	33.46	PASS	Horizontal	PK
5	31672.2269	-19.73	54.36	34.63	74.00	39.37	PASS	Horizontal	PK
6	35092.0437	-16.01	49.78	33.77	68.20	34.43	PASS	Horizontal	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5580Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

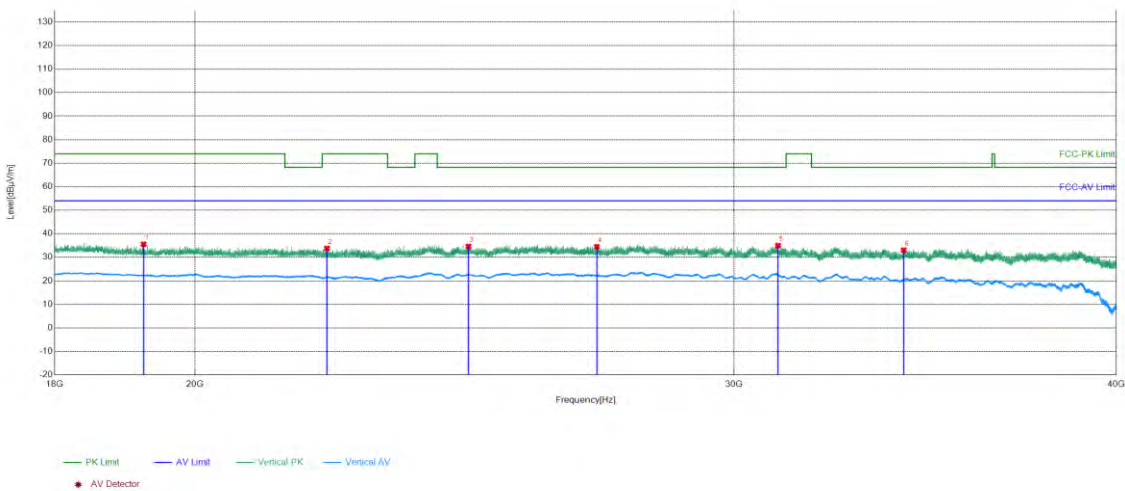

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19243.4897	-25.96	61.49	35.53	74.00	38.47	PASS	Vertical	PK
2	22089.5236	-25.63	59.41	33.78	74.00	40.22	PASS	Vertical	PK
3	24568.5827	-21.84	56.45	34.61	68.20	33.59	PASS	Vertical	PK
4	27059.9624	-21.85	56.32	34.47	68.20	33.73	PASS	Vertical	PK
5	31012.2005	-19.37	54.36	34.99	68.20	33.21	PASS	Vertical	PK
6	34087.0435	-17.67	50.72	33.05	68.20	35.15	PASS	Vertical	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5700Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

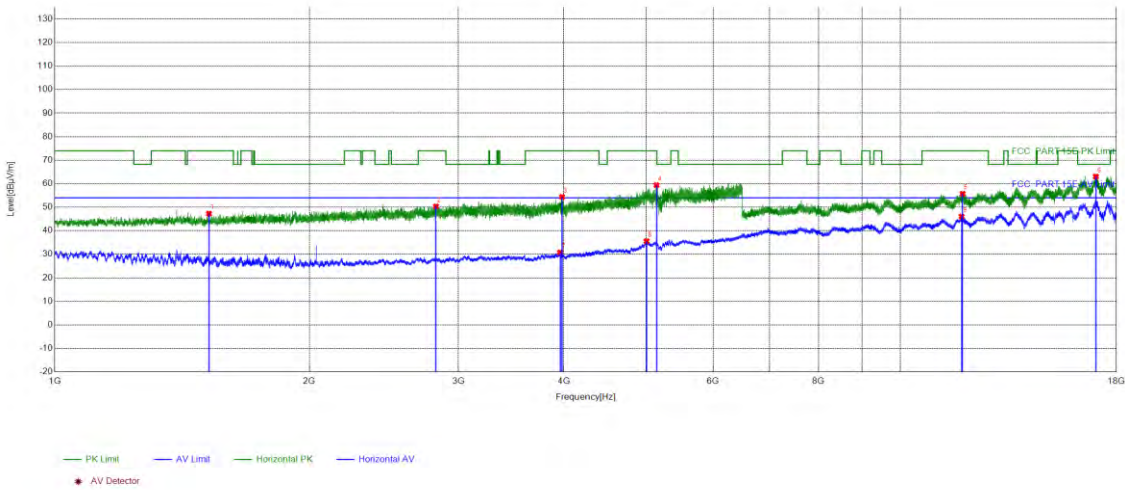

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1521.6409	13.48	33.80	47.28	74.00	26.72	PASS	Horizontal	PK
2	2822.9929	17.35	33.01	50.36	74.00	23.64	PASS	Horizontal	PK
3	3979.5792	21.55	32.84	54.39	74.00	19.61	PASS	Horizontal	PK
4	5145.8458	27.49	31.89	59.38	74.00	14.62	PASS	Horizontal	PK
5	11841.4421	2.95	52.78	55.73	74.00	18.27	PASS	Horizontal	PK
6	17019.001	12.56	50.48	63.04	68.20	5.16	PASS	Horizontal	PK
7	3958.4583	21.61	9.20	30.81	54.00	23.19	PASS	Horizontal	AV
8	5008.1203	25.16	10.39	35.55	54.00	18.45	PASS	Horizontal	AV
9	11809.8155	2.41	43.64	46.05	54.00	7.95	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5700Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

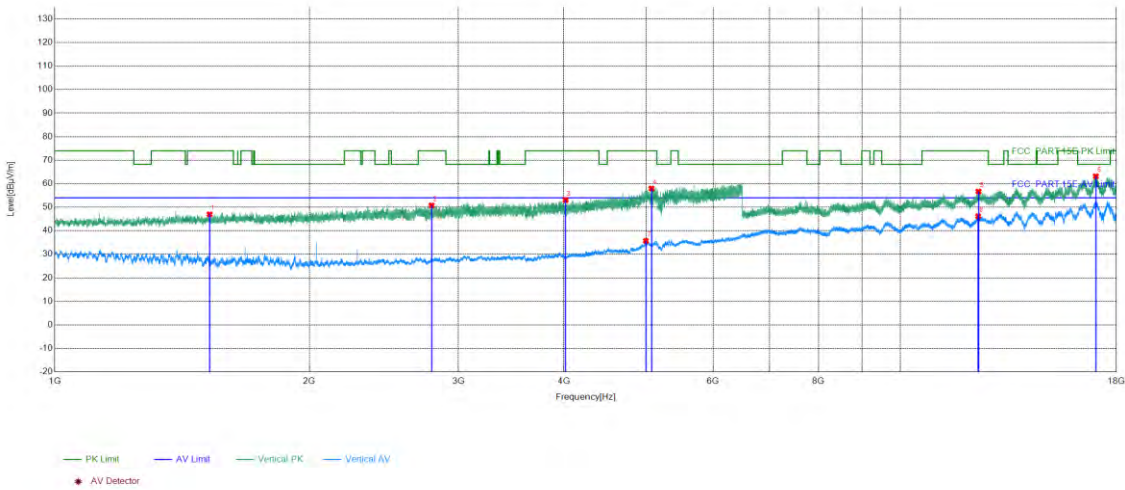

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1524.061	13.53	33.44	46.97	74.00	27.03	PASS	Vertical	PK
2	2789.3316	17.39	33.38	50.77	74.00	23.23	PASS	Vertical	PK
3	4017.6407	21.30	31.74	53.04	74.00	20.96	PASS	Vertical	PK
4	5076.3231	25.52	32.42	57.94	74.00	16.06	PASS	Vertical	PK
5	12365.2933	4.56	52.13	56.69	74.00	17.31	PASS	Vertical	PK
6	17019.001	12.56	50.61	63.17	68.20	5.03	PASS	Vertical	PK
7	4999.54	24.98	10.71	35.69	54.00	18.31	PASS	Vertical	AV
8	12356.6678	4.67	41.51	46.18	54.00	7.82	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5700Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

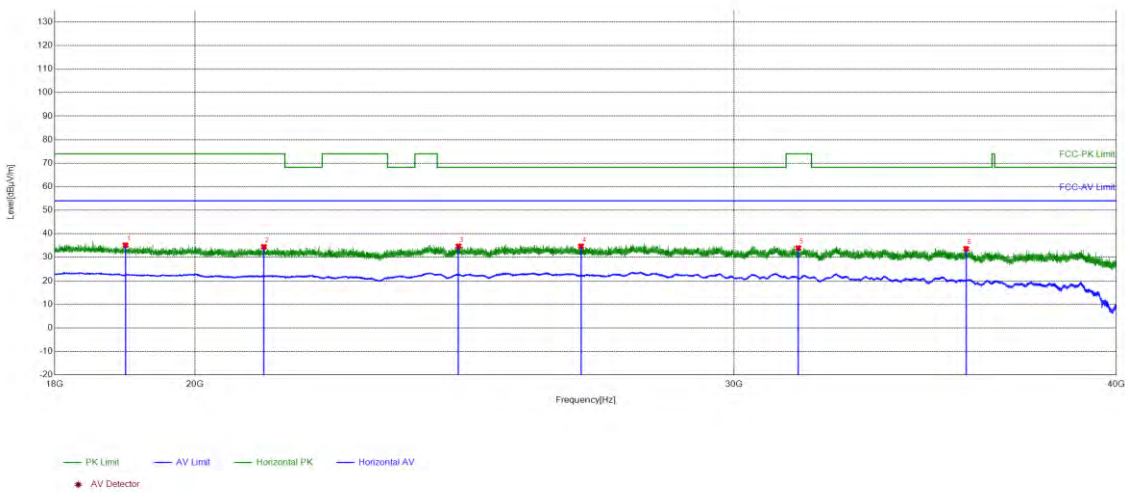

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	18983.8794	-26.27	61.43	35.16	74.00	38.84	PASS	Horizontal	PK
2	21066.0426	-25.92	60.36	34.44	74.00	39.56	PASS	Horizontal	PK
3	24387.2955	-21.74	56.47	34.73	68.20	33.47	PASS	Horizontal	PK
4	26741.3897	-21.42	56.14	34.72	68.20	33.48	PASS	Horizontal	PK
5	31487.4195	-19.68	53.61	33.93	74.00	40.07	PASS	Horizontal	PK
6	35724.789	-16.53	50.16	33.63	68.20	34.57	PASS	Horizontal	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5700Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

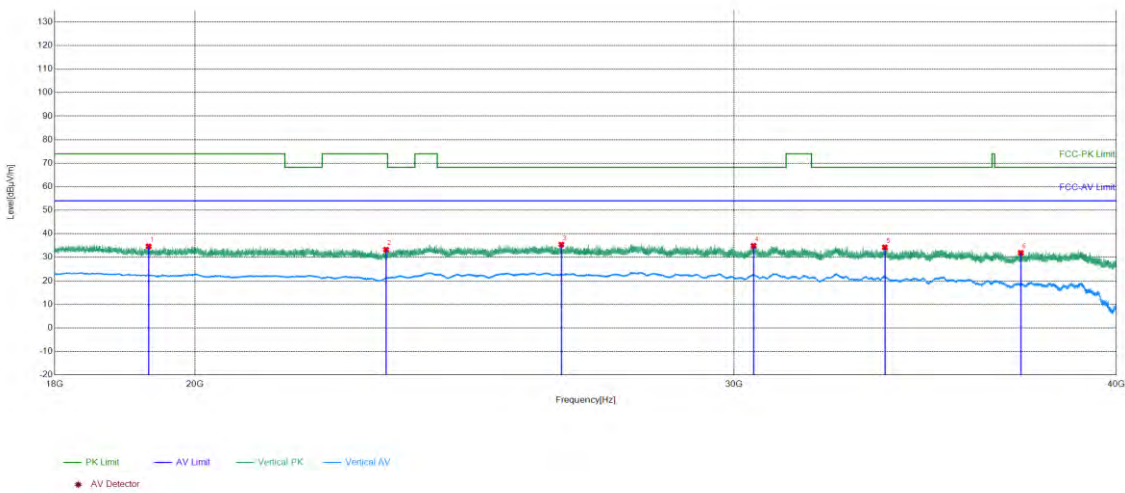

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19316.5327	-25.81	60.43	34.62	74.00	39.38	PASS	Vertical	PK
2	23093.6437	-25.02	58.29	33.27	74.00	40.73	PASS	Vertical	PK
3	26346.2538	-21.22	56.63	35.41	68.20	32.79	PASS	Vertical	PK
4	30445.4578	-20.38	55.26	34.88	68.20	33.32	PASS	Vertical	PK
5	33606.5443	-17.34	51.56	34.22	68.20	33.98	PASS	Vertical	PK
6	37225.249	-16.20	48.08	31.88	68.20	36.32	PASS	Vertical	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5510Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

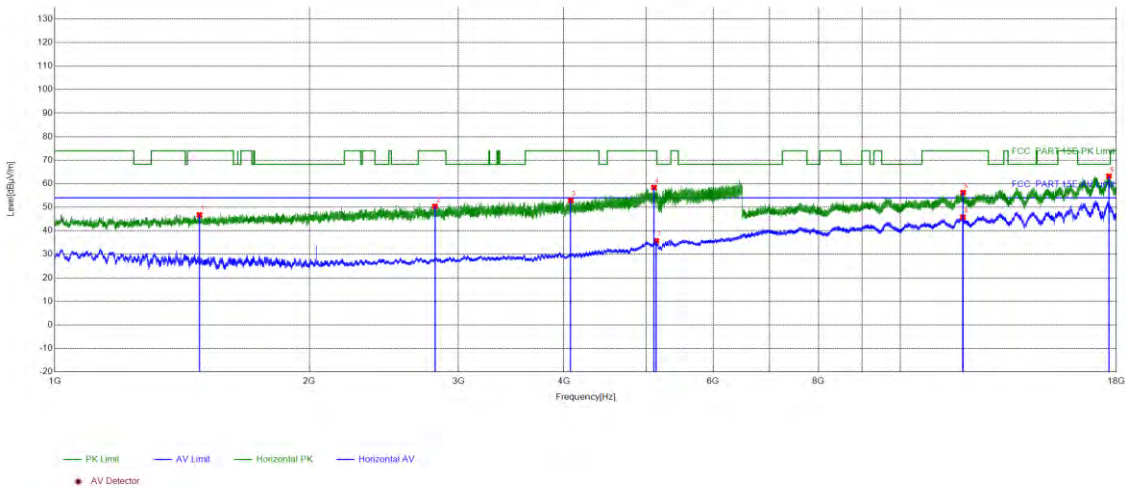

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1482.6993	13.32	33.42	46.74	74.00	27.26	PASS	Horizontal	PK
2	2815.2926	17.39	32.99	50.38	74.00	23.62	PASS	Horizontal	PK
3	4074.183	21.78	31.12	52.90	74.00	21.10	PASS	Horizontal	PK
4	5111.5245	26.59	31.82	58.41	74.00	15.59	PASS	Horizontal	PK
5	11856.3928	3.10	53.16	56.26	74.00	17.74	PASS	Horizontal	PK
6	17635.4318	14.27	48.97	63.24	68.20	4.96	PASS	Horizontal	PK
7	5144.9658	27.49	8.22	35.71	54.00	18.29	PASS	Horizontal	AV
8	11851.2176	3.11	42.63	45.74	54.00	8.26	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5510Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

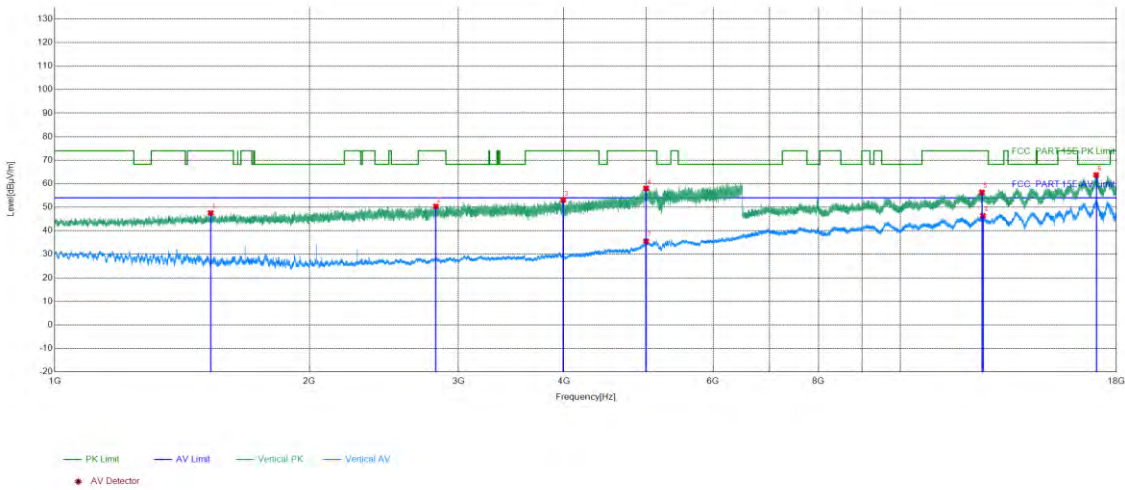

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1528.6811	13.61	33.98	47.59	74.00	26.41	PASS	Vertical	PK
2	2822.5529	17.34	33.03	50.37	74.00	23.63	PASS	Vertical	PK
3	3990.7996	21.65	31.39	53.04	74.00	20.96	PASS	Vertical	PK
4	5000.86	25.00	33.00	58.00	74.00	16.00	PASS	Vertical	PK
5	12479.149	4.00	52.33	56.33	74.00	17.67	PASS	Vertical	PK
6	17039.127	12.42	51.29	63.71	68.20	4.49	PASS	Vertical	PK
7	5002.8401	25.05	10.46	35.51	54.00	18.49	PASS	Vertical	AV
8	12517.1009	4.70	41.67	46.37	54.00	7.63	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5510Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

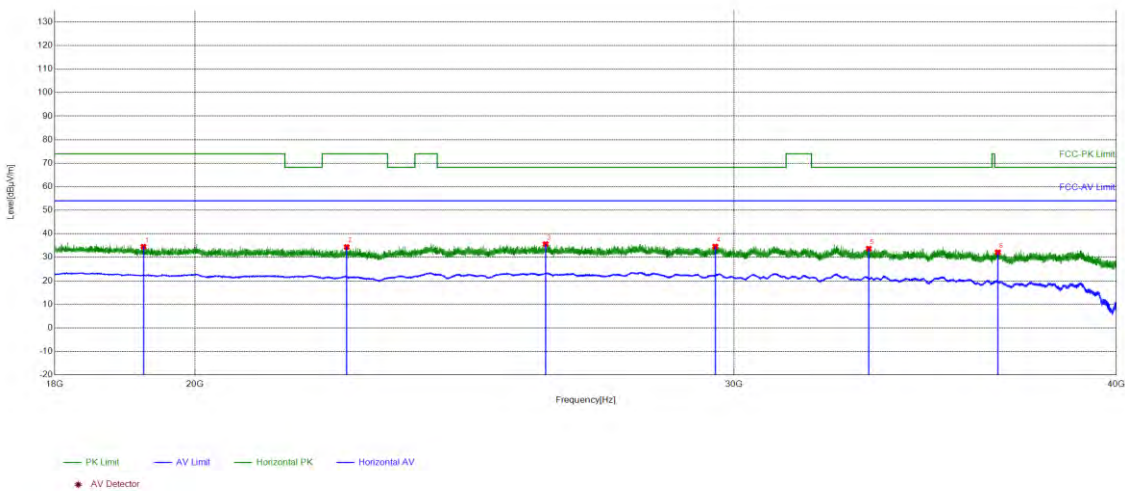

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19241.7297	-25.97	60.49	34.52	74.00	39.48	PASS	Horizontal	PK
2	22420.4168	-25.09	59.44	34.35	74.00	39.65	PASS	Horizontal	PK
3	26037.3615	-20.98	56.59	35.61	68.20	32.59	PASS	Horizontal	PK
4	29582.1433	-20.66	55.26	34.60	68.20	33.60	PASS	Horizontal	PK
5	33201.7281	-18.23	51.88	33.65	68.20	34.55	PASS	Horizontal	PK
6	36588.1035	-15.81	47.94	32.13	68.20	36.07	PASS	Horizontal	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5510Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

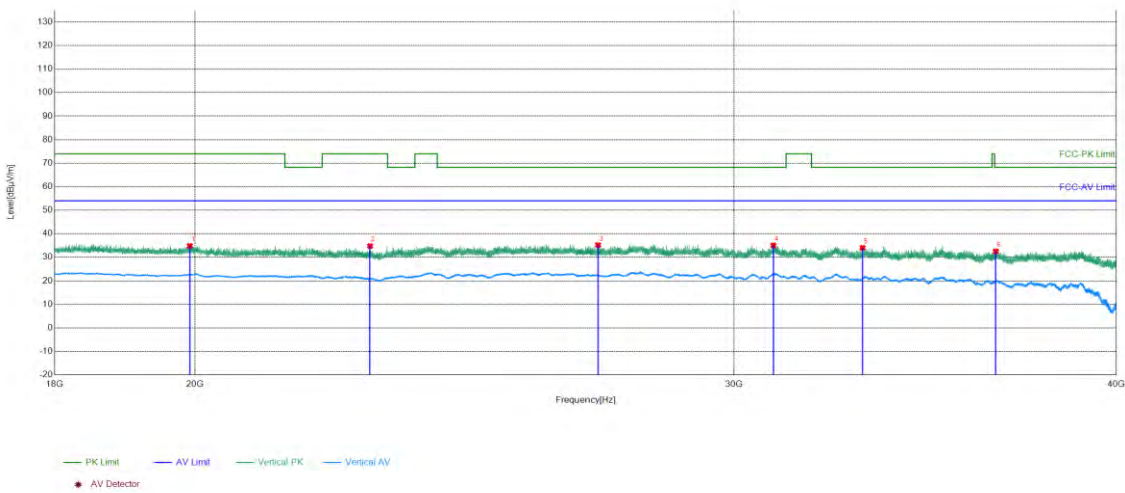

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19924.637	-24.85	59.69	34.84	74.00	39.16	PASS	Vertical	PK
2	22816.4327	-25.10	59.88	34.78	74.00	39.22	PASS	Vertical	PK
3	27085.4834	-21.87	57.07	35.20	68.20	33.00	PASS	Vertical	PK
4	30903.9562	-19.47	54.51	35.04	68.20	33.16	PASS	Vertical	PK
5	33046.8419	-18.64	52.66	34.02	68.20	34.18	PASS	Vertical	PK
6	36530.9012	-16.08	48.58	32.50	68.20	35.70	PASS	Vertical	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5550Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

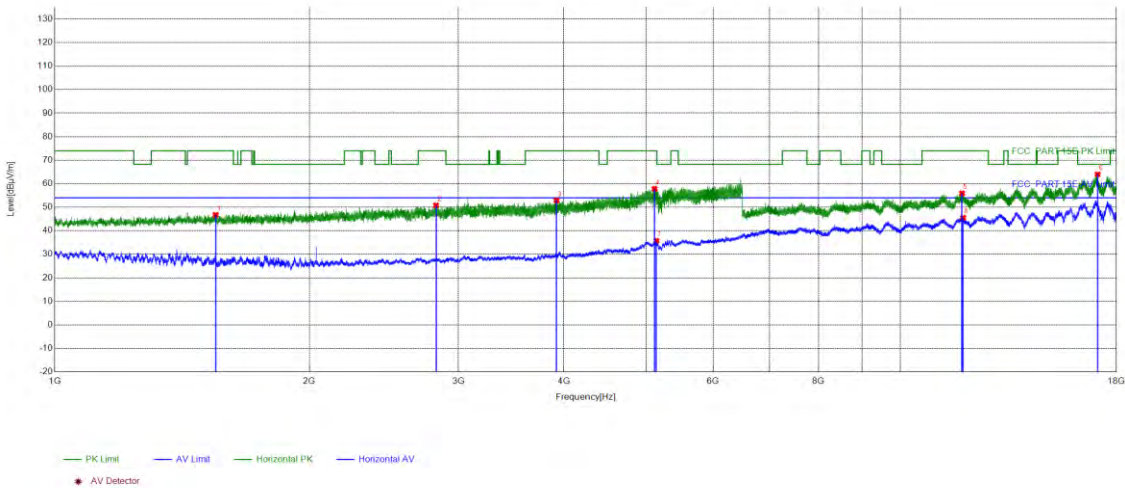

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1549.362	13.61	33.13	46.74	74.00	27.26	PASS	Horizontal	PK
2	2823.4329	17.35	33.45	50.80	74.00	23.20	PASS	Horizontal	PK
3	3919.2968	21.05	31.82	52.87	74.00	21.13	PASS	Horizontal	PK
4	5119.6648	27.01	30.80	57.81	74.00	16.19	PASS	Horizontal	PK
5	11824.1912	2.65	53.28	55.93	74.00	18.07	PASS	Horizontal	PK
6	17102.3801	12.26	51.72	63.98	68.20	4.22	PASS	Horizontal	PK
7	5145.6258	27.49	8.24	35.73	54.00	18.27	PASS	Horizontal	AV
8	11858.6929	3.11	42.42	45.53	54.00	8.47	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5550Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

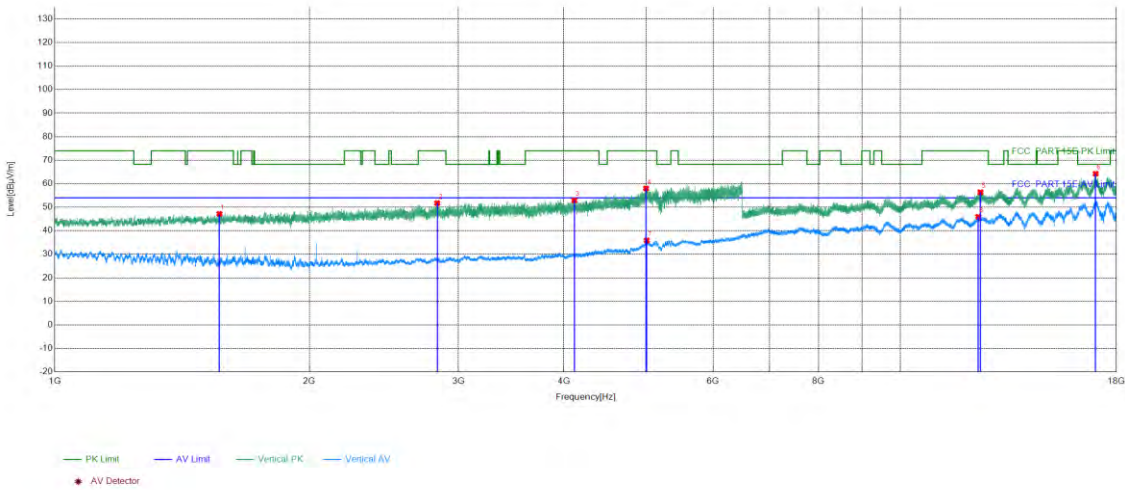

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1565.6426	13.65	33.53	47.18	74.00	26.82	PASS	Vertical	PK
2	2832.6733	17.46	34.27	51.73	74.00	22.27	PASS	Vertical	PK
3	4114.4446	21.77	31.12	52.89	74.00	21.11	PASS	Vertical	PK
4	5001.3001	25.01	32.99	58.00	74.00	16.00	PASS	Vertical	PK
5	12431.4216	3.62	52.75	56.37	74.00	17.63	PASS	Vertical	PK
6	17011.5256	12.60	51.65	64.25	68.20	3.95	PASS	Vertical	PK
7	5011.2004	25.18	10.70	35.88	54.00	18.12	PASS	Vertical	AV
8	12354.9427	4.69	41.27	45.96	54.00	8.04	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5550Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

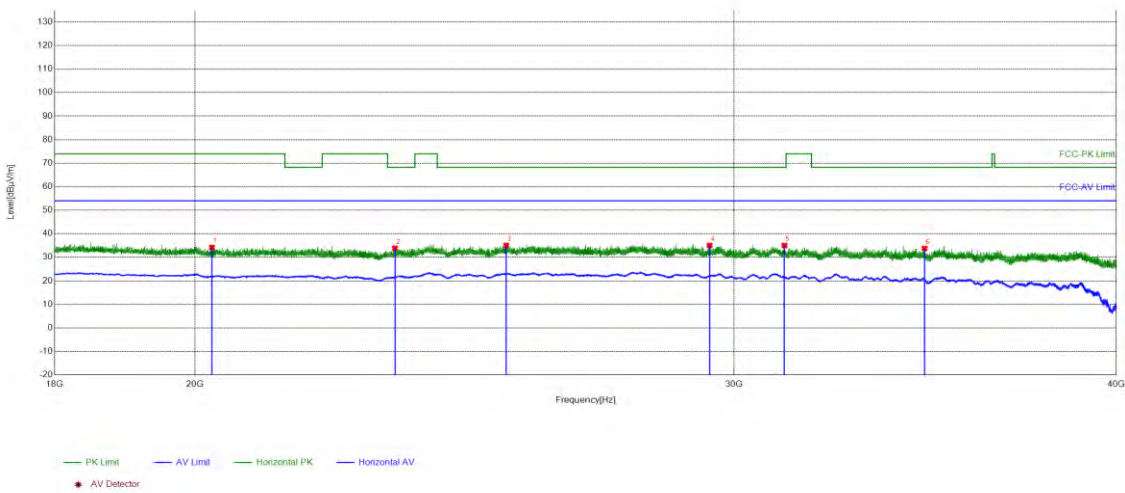

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	20259.0504	-25.50	59.69	34.19	74.00	39.81	PASS	Horizontal	PK
2	23247.6499	-24.10	57.95	33.85	68.20	34.35	PASS	Horizontal	PK
3	25277.8911	-21.19	56.23	35.04	68.20	33.16	PASS	Horizontal	PK
4	29454.5382	-21.12	56.16	35.04	68.20	33.16	PASS	Horizontal	PK
5	31160.0464	-19.89	54.91	35.02	68.20	33.18	PASS	Horizontal	PK
6	34625.625	-16.14	49.91	33.77	68.20	34.43	PASS	Horizontal	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5550Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

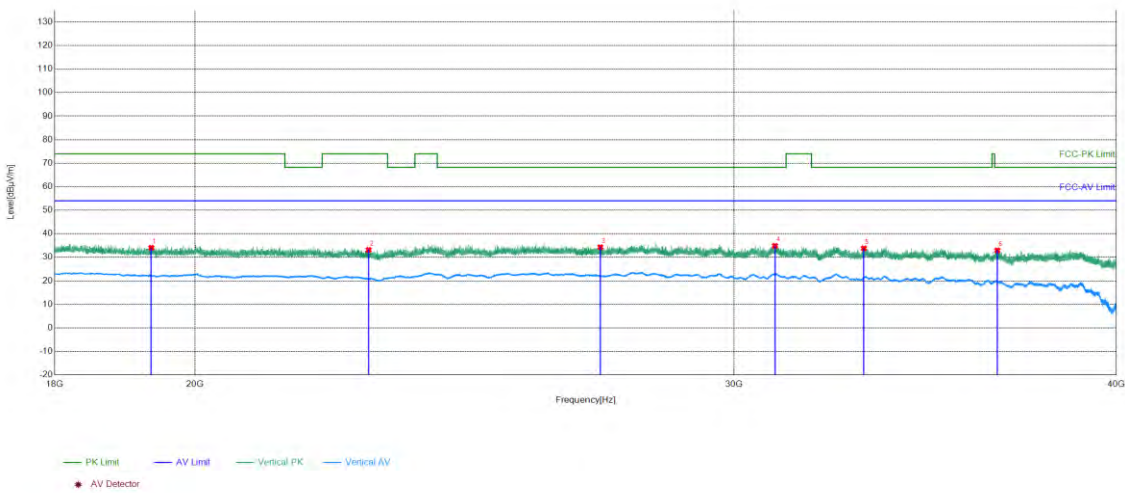

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	19354.3742	-25.72	59.74	34.02	74.00	39.98	PASS	Vertical	PK
2	22791.7917	-25.04	58.18	33.14	74.00	40.86	PASS	Vertical	PK
3	27133.0053	-21.88	56.16	34.28	68.20	33.92	PASS	Vertical	PK
4	30939.1576	-19.42	54.27	34.85	68.20	33.35	PASS	Vertical	PK
5	33079.4032	-18.56	52.35	33.79	68.20	34.41	PASS	Vertical	PK
6	36572.2629	-15.88	48.81	32.93	68.20	35.27	PASS	Vertical	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5670Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

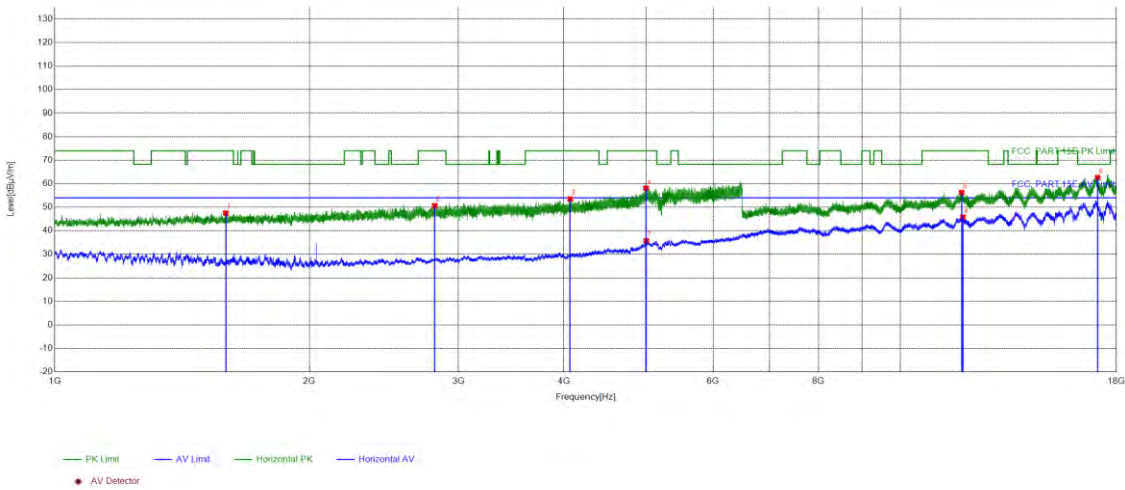

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1592.9237	13.85	33.65	47.50	74.00	26.50	PASS	Horizontal	PK
2	2813.7526	17.42	33.21	50.63	74.00	23.37	PASS	Horizontal	PK
3	4068.0227	21.73	31.74	53.47	74.00	20.53	PASS	Horizontal	PK
4	5000.64	24.99	33.10	58.09	74.00	15.91	PASS	Horizontal	PK
5	11810.3905	2.42	53.81	56.23	74.00	17.77	PASS	Horizontal	PK
6	17102.3801	12.26	50.34	62.60	68.20	5.60	PASS	Horizontal	PK
7	5004.3802	25.08	10.64	35.72	54.00	18.28	PASS	Horizontal	AV
8	11850.0675	3.11	42.70	45.81	54.00	8.19	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5670Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

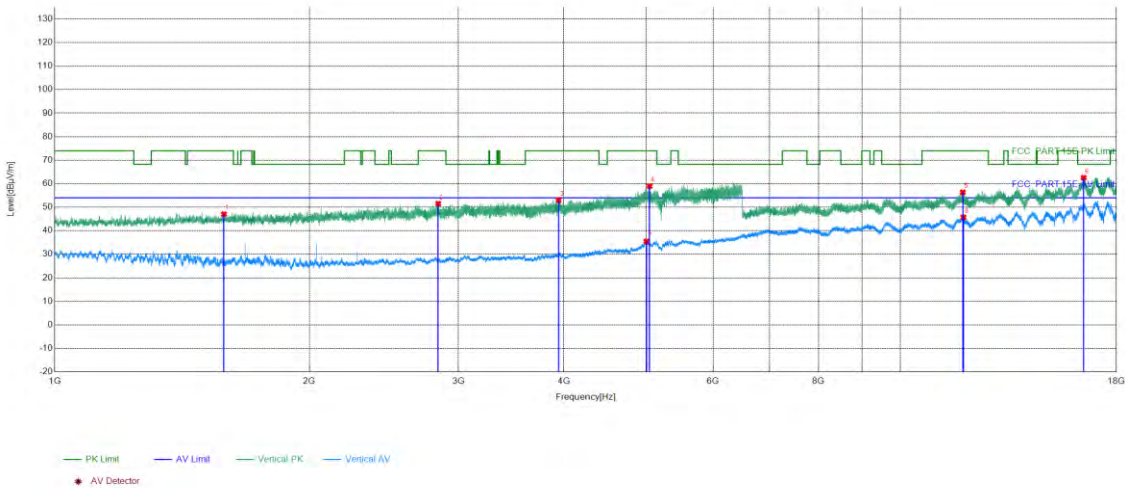

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	1585.2234	13.75	33.28	47.03	74.00	26.97	PASS	Vertical	PK
2	2839.7136	17.57	33.93	51.50	74.00	22.50	PASS	Vertical	PK
3	3941.2977	21.61	31.41	53.02	74.00	20.98	PASS	Vertical	PK
4	5048.822	25.53	33.42	58.95	74.00	15.05	PASS	Vertical	PK
5	11844.8922	3.02	53.33	56.35	74.00	17.65	PASS	Vertical	PK
6	16463.5232	10.44	52.11	62.55	68.20	5.65	PASS	Vertical	PK
7	5006.3603	25.12	10.31	35.43	54.00	18.57	PASS	Vertical	AV
8	11866.7433	3.09	42.62	45.71	54.00	8.29	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5670Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

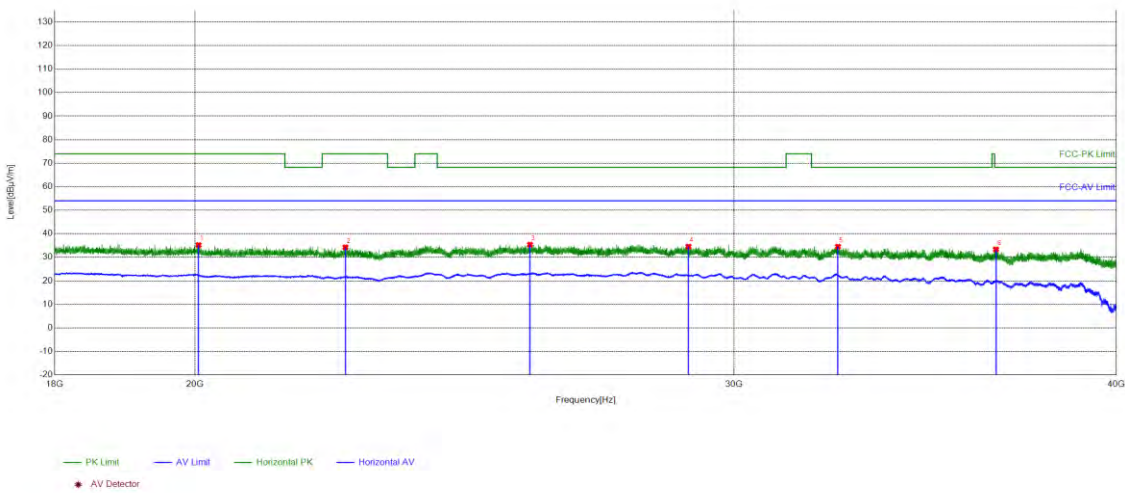

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	20055.7622	-24.87	60.10	35.23	74.00	38.77	PASS	Horizontal	PK
2	22397.5359	-25.10	59.36	34.26	74.00	39.74	PASS	Horizontal	PK
3	25733.7493	-20.78	56.15	35.37	68.20	32.83	PASS	Horizontal	PK
4	28988.9996	-21.31	55.87	34.56	68.20	33.64	PASS	Horizontal	PK
5	32440.4976	-18.21	52.72	34.51	68.20	33.69	PASS	Horizontal	PK
6	36536.1814	-16.06	49.42	33.36	68.20	34.84	PASS	Horizontal	PK

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	5670Mhz
Remark:	\	Test_Date	2026/6/23

Test Graph

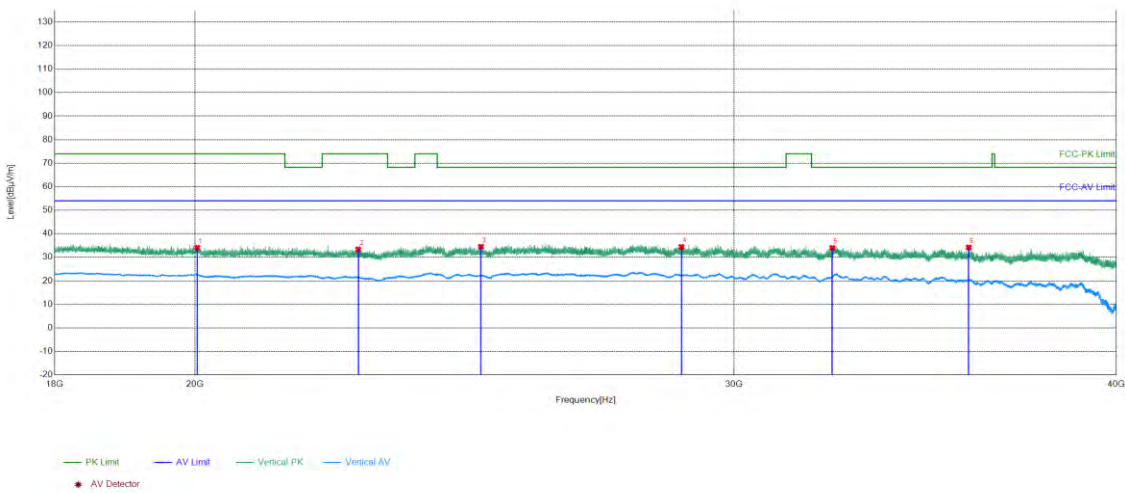


Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	20035.5214	-24.78	58.84	34.06	74.00	39.94	PASS	Vertical	PK
2	22615.7846	-25.00	58.38	33.38	74.00	40.62	PASS	Vertical	PK
3	24803.5521	-21.96	56.47	34.51	68.20	33.69	PASS	Vertical	PK
4	28839.3936	-21.44	55.86	34.42	68.20	33.78	PASS	Vertical	PK
5	32304.9722	-18.64	52.61	33.97	68.20	34.23	PASS	Vertical	PK
6	35793.4317	-16.73	50.91	34.18	68.20	34.02	PASS	Vertical	PK

U-NII-3:

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5745Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

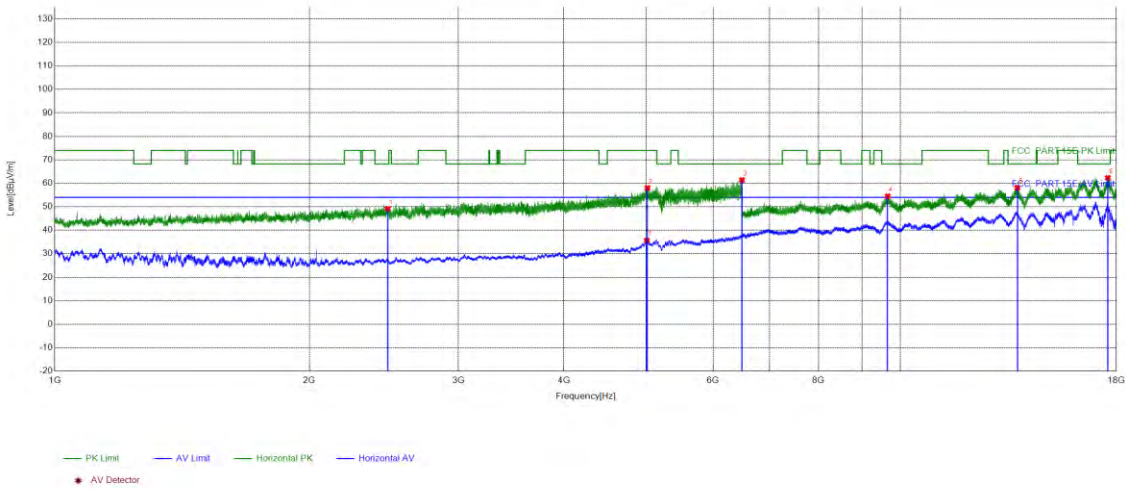

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2476.259	16.70	32.47	49.17	68.20	19.03	PASS	Horizontal	PK
2	5020.6608	25.08	32.93	58.01	74.00	15.99	PASS	Horizontal	PK
3	6492.9597	28.52	32.88	61.40	68.20	6.80	PASS	Horizontal	PK
4	9654.6077	1.17	53.30	54.47	68.20	13.73	PASS	Horizontal	PK
5	13744.7872	7.23	50.90	58.13	68.20	10.07	PASS	Horizontal	PK
6	17585.4043	14.05	48.26	62.31	68.20	5.89	PASS	Horizontal	PK
7	5012.0805	25.17	10.46	35.63	54.00	18.37	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5745Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

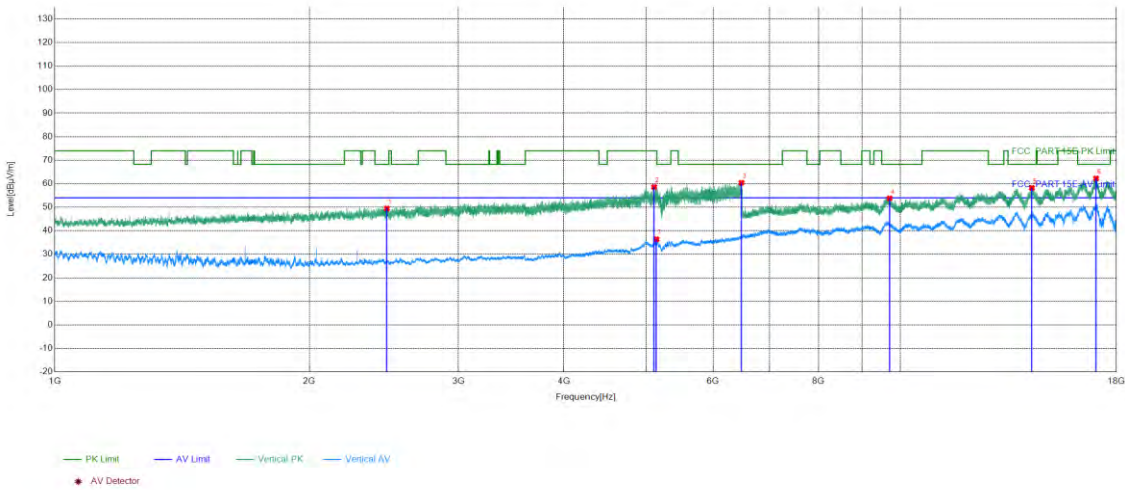

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2469.4388	16.79	32.69	49.48	68.20	18.72	PASS	Vertical	PK
2	5113.5045	26.70	31.88	58.58	74.00	15.42	PASS	Vertical	PK
3	6484.8194	28.65	31.75	60.40	68.20	7.80	PASS	Vertical	PK
4	9705.7853	1.16	52.61	53.77	68.20	14.43	PASS	Vertical	PK
5	14295.0898	8.45	49.77	58.22	68.20	9.98	PASS	Vertical	PK
6	17032.8016	12.46	49.79	62.25	68.20	5.95	PASS	Vertical	PK
7	5145.1858	27.49	8.89	36.38	54.00	17.62	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5745Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

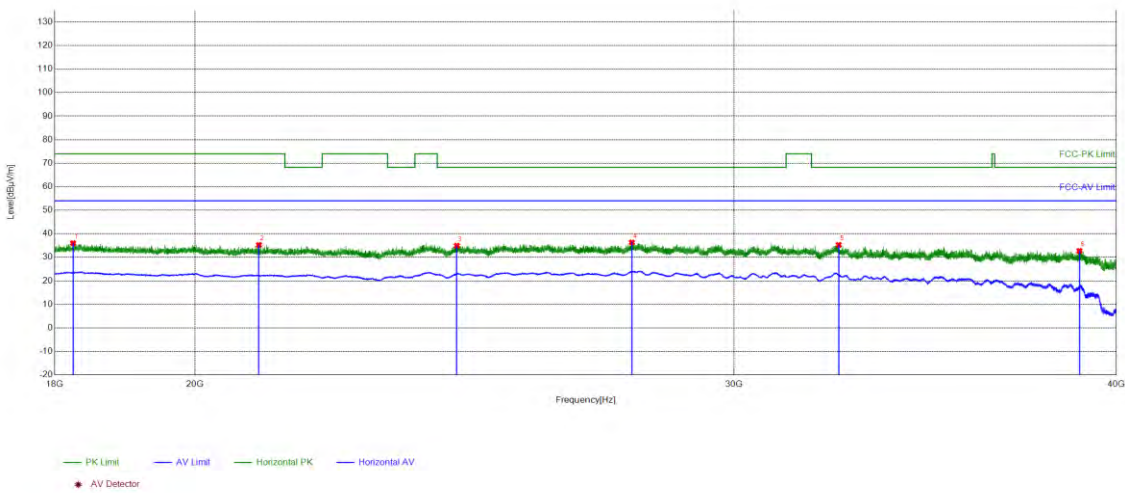

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	18249.05	-26.90	62.89	35.99	74.00	38.01	PASS	Horizontal	PK
2	20986.8395	-25.98	61.21	35.23	74.00	38.77	PASS	Horizontal	PK
3	24356.4943	-21.89	56.82	34.93	68.20	33.27	PASS	Horizontal	PK
4	27781.5913	-21.10	57.41	36.31	68.20	31.89	PASS	Horizontal	PK
5	32461.6185	-18.31	53.58	35.27	68.20	32.93	PASS	Horizontal	PK
6	38902.5961	-13.04	45.77	32.73	68.20	35.47	PASS	Horizontal	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5745Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

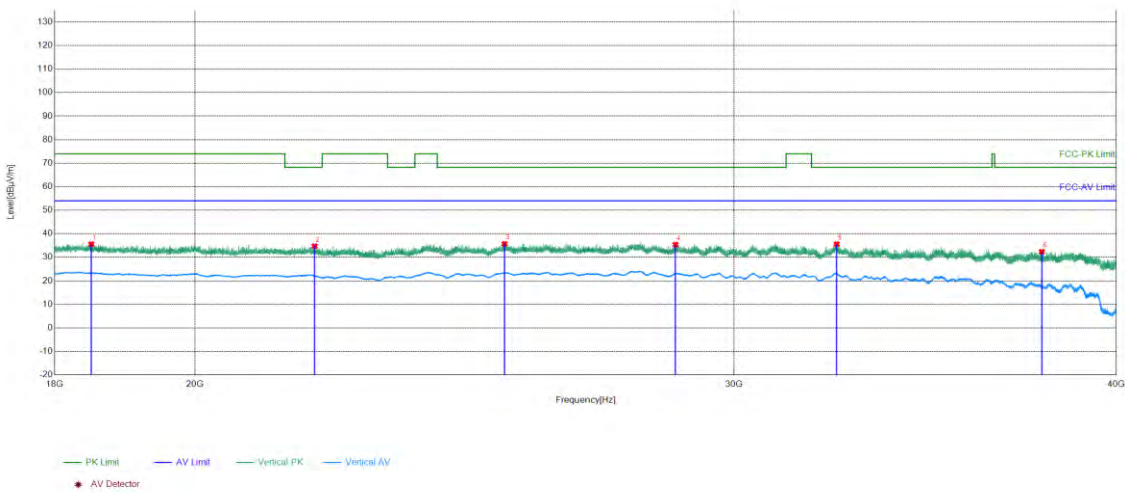

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	18500.74	-26.69	62.26	35.57	74.00	38.43	PASS	Vertical	PK
2	21884.4754	-25.65	60.39	34.74	68.20	33.46	PASS	Vertical	PK
3	25246.2098	-21.13	56.84	35.71	68.20	32.49	PASS	Vertical	PK
4	28710.0284	-21.68	57.04	35.36	68.20	32.84	PASS	Vertical	PK
5	32411.4565	-18.08	53.64	35.56	68.20	32.64	PASS	Vertical	PK
6	37815.7526	-15.28	47.65	32.37	68.20	35.83	PASS	Vertical	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5785Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

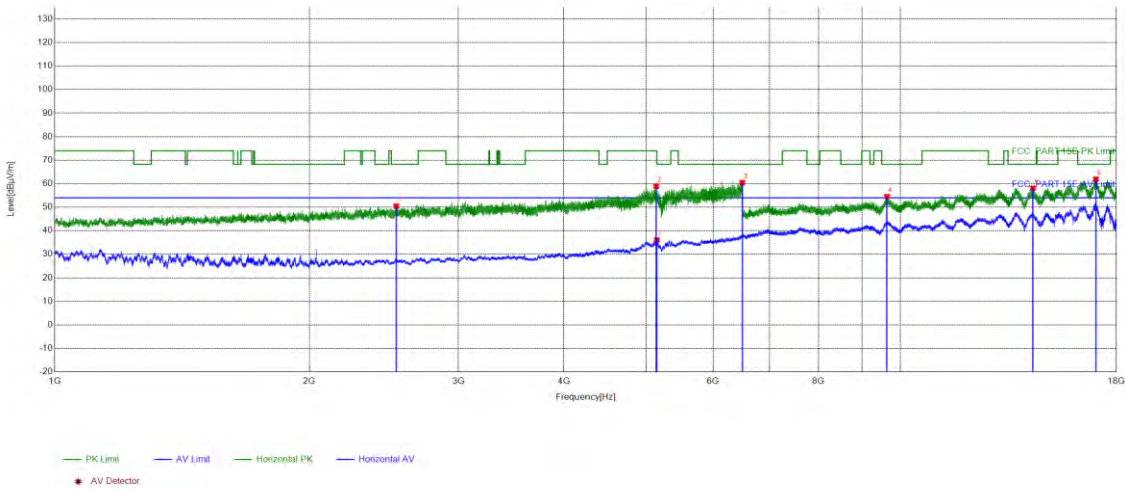

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2533.9014	16.71	33.80	50.51	68.20	17.69	PASS	Horizontal	PK
2	5142.5457	27.49	31.42	58.91	74.00	15.09	PASS	Horizontal	PK
3	6498.4599	28.35	32.13	60.48	68.20	7.72	PASS	Horizontal	PK
4	9637.9319	1.19	53.35	54.54	68.20	13.66	PASS	Horizontal	PK
5	14339.942	8.85	49.24	58.09	68.20	10.11	PASS	Horizontal	PK
6	17023.0262	12.53	49.40	61.93	68.20	6.27	PASS	Horizontal	PK
7	5150.466	27.50	8.63	36.13	54.00	17.87	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5785Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

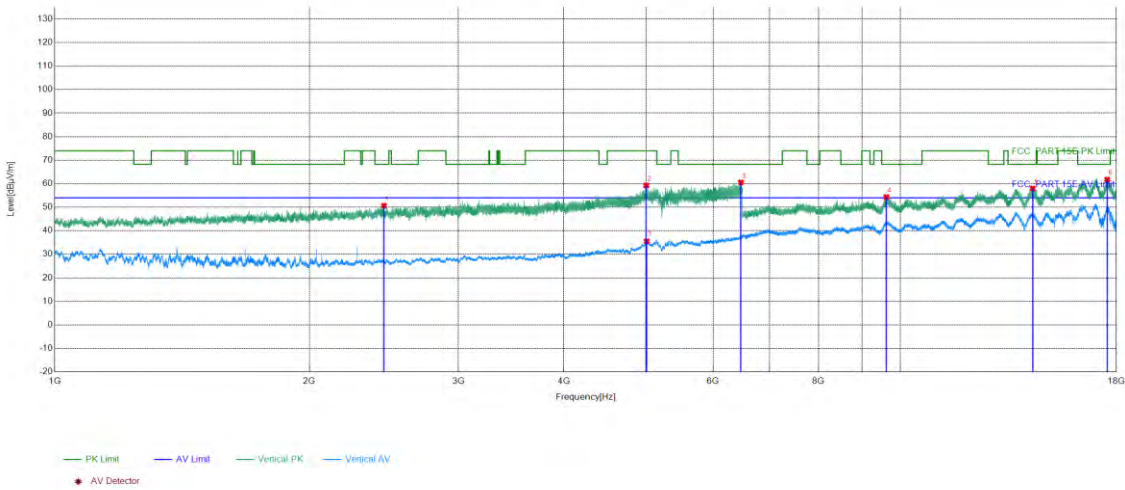

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2450.518	16.50	34.14	50.64	68.20	17.56	PASS	Vertical	PK
2	5003.5001	25.06	34.20	59.26	74.00	14.74	PASS	Vertical	PK
3	6475.799	28.50	32.04	60.54	68.20	7.66	PASS	Vertical	PK
4	9621.2561	1.22	53.11	54.33	68.20	13.87	PASS	Vertical	PK
5	14328.4414	8.73	49.26	57.99	68.20	10.21	PASS	Vertical	PK
6	17556.6528	13.92	47.85	61.77	68.20	6.43	PASS	Vertical	PK
7	5011.2004	25.18	10.34	35.52	54.00	18.48	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5785Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

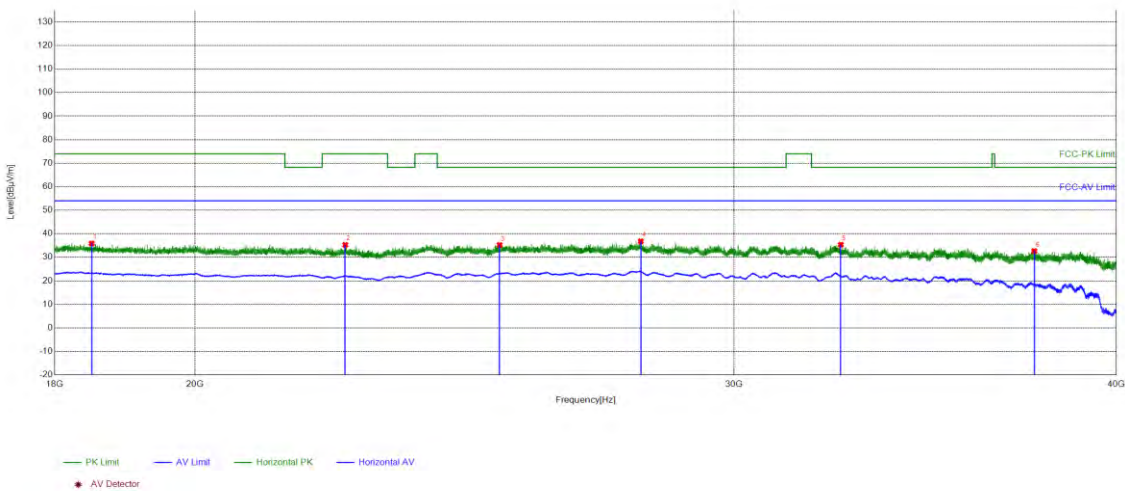

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	18505.1402	-26.69	62.55	35.86	74.00	38.14	PASS	Horizontal	PK
2	22394.8958	-25.10	60.36	35.26	74.00	38.74	PASS	Horizontal	PK
3	25151.166	-21.31	56.52	35.21	68.20	32.99	PASS	Horizontal	PK
4	27970.7988	-21.18	57.98	36.80	68.20	31.40	PASS	Horizontal	PK
5	32510.9004	-18.54	53.88	35.34	68.20	32.86	PASS	Horizontal	PK
6	37603.6641	-14.85	47.50	32.65	68.20	35.55	PASS	Horizontal	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5785Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

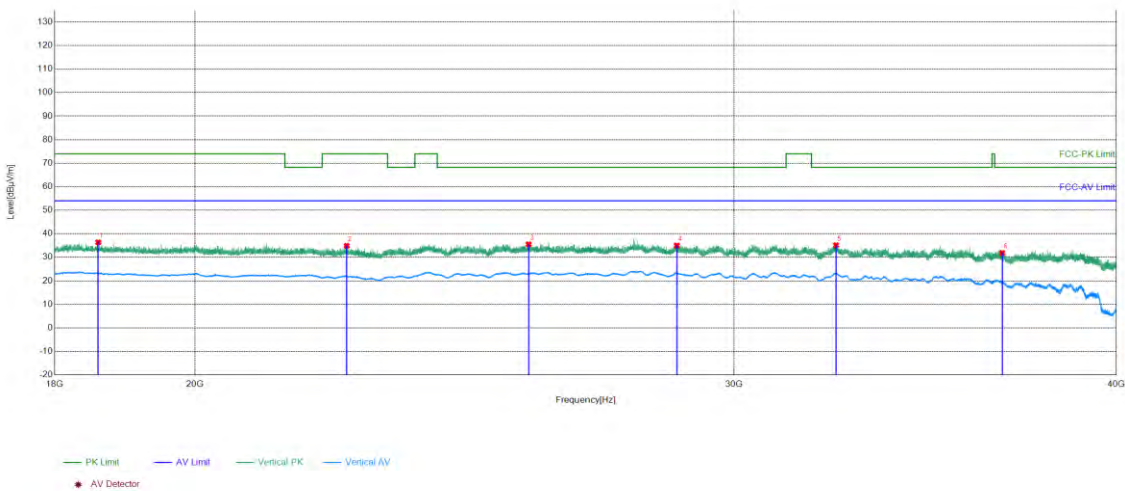

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	18598.4239	-26.69	63.05	36.36	74.00	37.64	PASS	Vertical	PK
2	22419.5368	-25.09	59.97	34.88	74.00	39.12	PASS	Vertical	PK
3	25707.3483	-20.77	56.26	35.49	68.20	32.71	PASS	Vertical	PK
4	28738.1895	-21.63	56.67	35.04	68.20	33.16	PASS	Vertical	PK
5	32393.8558	-18.07	53.22	35.15	68.20	33.05	PASS	Vertical	PK
6	36706.9083	-16.36	48.19	31.83	68.20	36.37	PASS	Vertical	PK

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5825Mhz
Remark:	\	Test_Date	2026/6/23


Test Graph

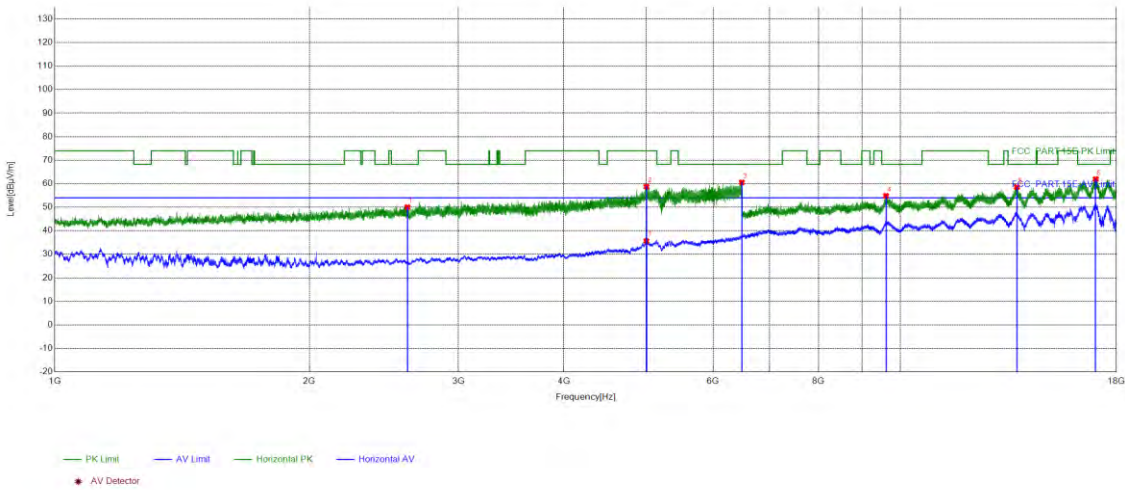

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2612.0045	16.72	33.32	50.04	68.20	18.16	PASS	Horizontal	PK
2	5007.2403	25.13	33.61	58.74	74.00	15.26	PASS	Horizontal	PK
3	6489.4396	28.62	31.93	60.55	68.20	7.65	PASS	Horizontal	PK
4	9611.4806	1.24	53.63	54.87	68.20	13.33	PASS	Horizontal	PK
5	13724.6612	7.24	51.30	58.54	68.20	9.66	PASS	Horizontal	PK
6	17012.6756	12.59	49.35	61.94	68.20	6.26	PASS	Horizontal	PK
7	5005.4802	25.10	10.52	35.62	54.00	18.38	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	5825Mhz
Remark:	\	Test_Date	2026/6/23

Test Graph

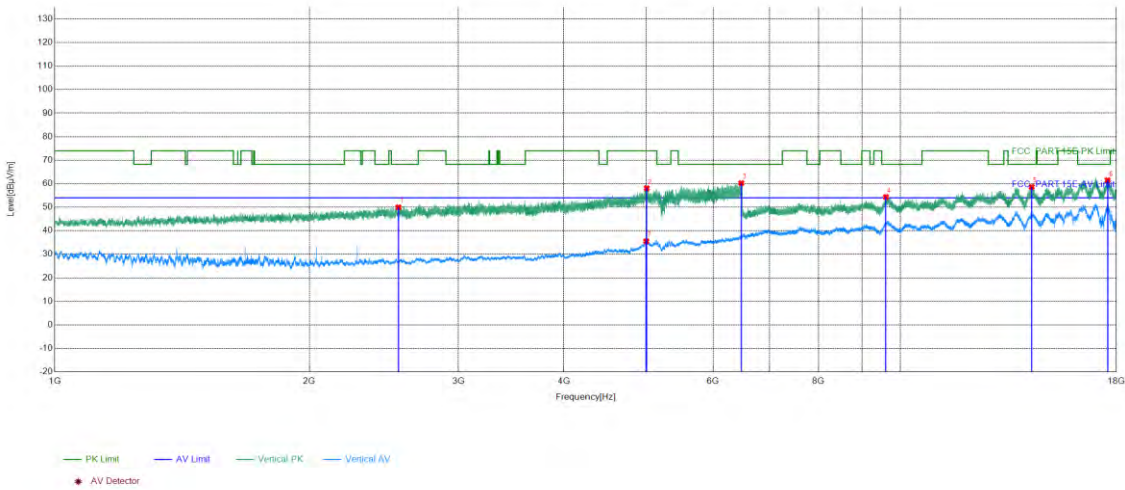

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Result	Polarity	Remark
1	2549.082	16.64	33.35	49.99	68.20	18.21	PASS	Vertical	PK
2	5010.1004	25.20	32.89	58.09	74.00	15.91	PASS	Vertical	PK
3	6481.2993	28.66	31.56	60.22	68.20	7.98	PASS	Vertical	PK
4	9610.9055	1.24	53.11	54.35	68.20	13.85	PASS	Vertical	PK
5	14288.7644	8.50	50.12	58.62	68.20	9.58	PASS	Vertical	PK
6	17573.3287	13.99	47.48	61.47	68.20	6.73	PASS	Vertical	PK
7	5004.1602	25.07	10.41	35.48	54.00	18.52	PASS	Vertical	AV