


Test_Mode	GFSK Transmitting	Test_Frequency	2480Mhz
Remark:	\	Test_Date	2026/6/17


Test Graph

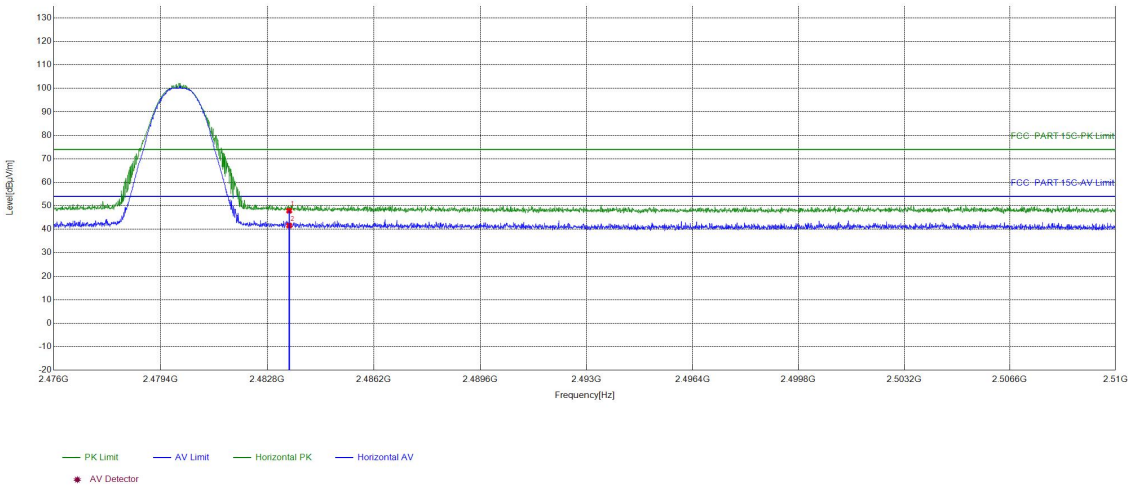

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	31.62	47.91	74.00	26.09	PASS	Horizont	PK
2	2483.5	16.29	25.30	41.59	54.00	12.41	PASS	Horizont	AV

Test_Mode	GFSK Transmitting	Test_Frequency	2480Mhz
Remark:	\	Test_Date	2026/6/17


Test Graph

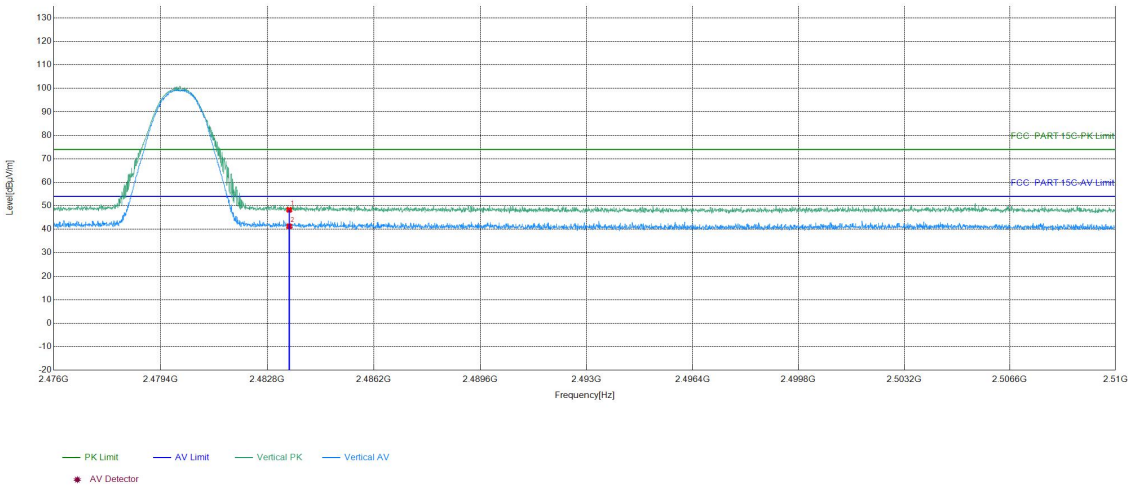

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	32.00	48.29	74.00	25.71	PASS	Vertical	PK
2	2483.5	16.29	24.97	41.26	54.00	12.74	PASS	Vertical	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2402Mhz
Remark:	\	Test_Date	2026/6/17


Test Graph

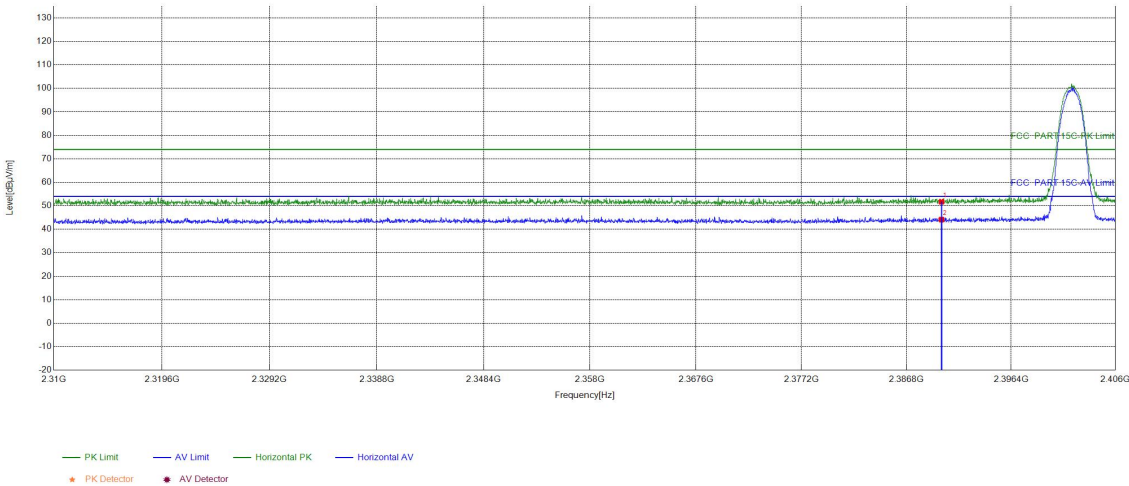

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.76	51.72	74.00	22.28	PASS	Horizont	PK
2	2390	15.96	28.15	44.11	54.00	9.89	PASS	Horizont	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2402Mhz
Remark:	\	Test_Date	2026/6/17


Test Graph

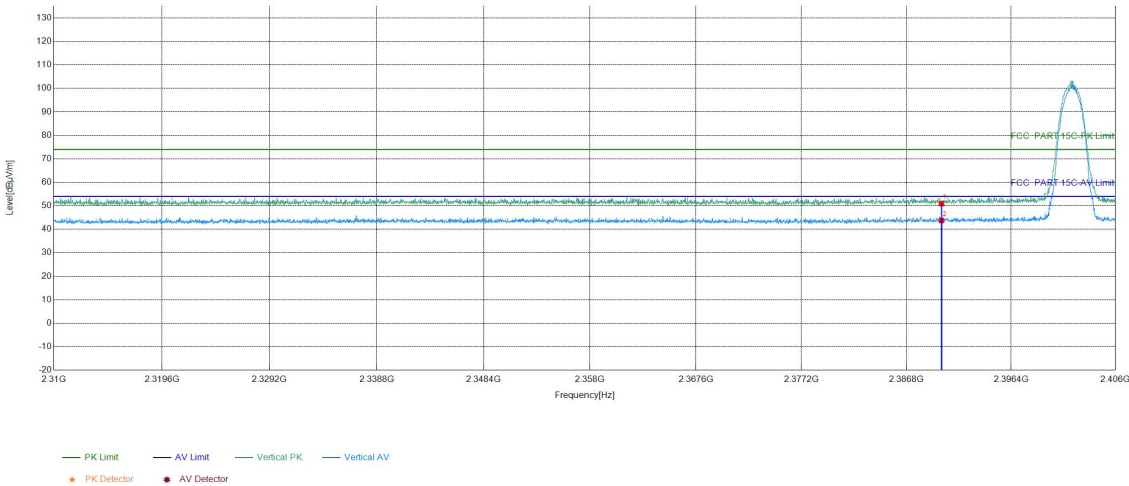

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	34.97	50.93	74.00	23.07	PASS	Vertical	PK
2	2390	15.96	27.81	43.77	54.00	10.23	PASS	Vertical	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2480Mhz
Remark:	\	Test_Date	2026/6/17


Test Graph

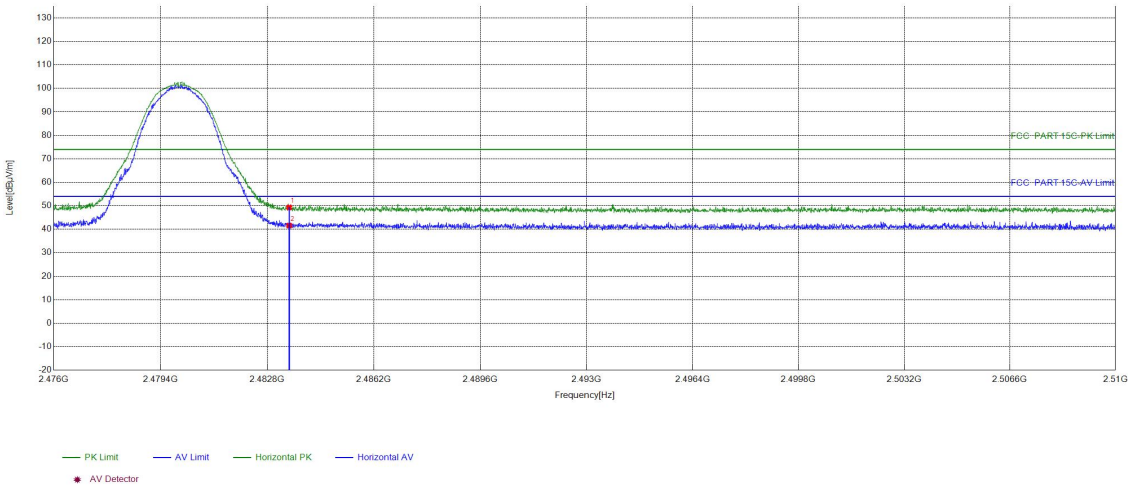

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	33.03	49.32	74.00	24.68	PASS	Horizont	PK
2	2483.5	16.29	25.30	41.59	54.00	12.41	PASS	Horizont	AV

Test_Mode	π /4DQPSK Transmitting	Test_Frequency	2480Mhz
Remark:	\	Test_Date	2026/6/17


Test Graph

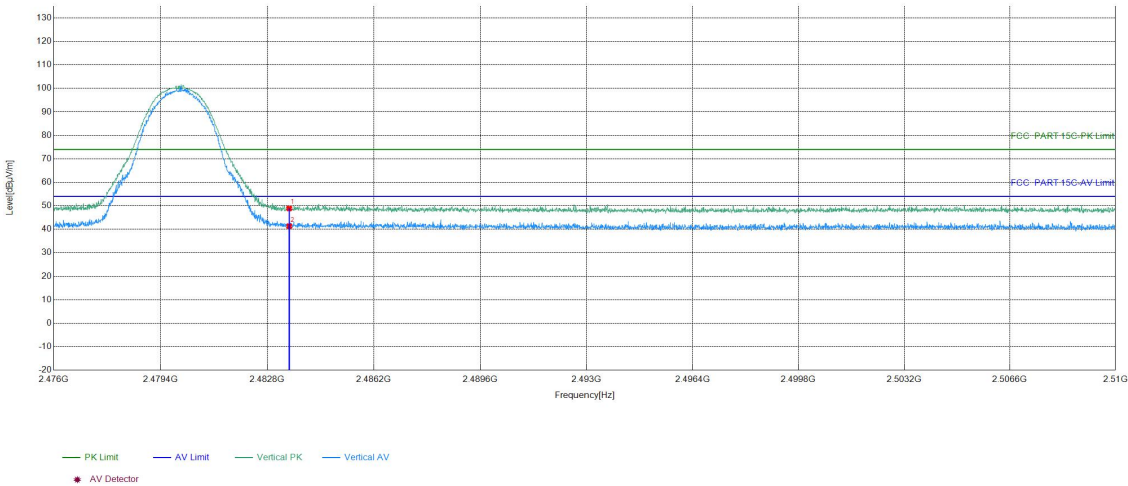

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	32.59	48.88	74.00	25.12	PASS	Vertical	PK
2	2483.5	16.29	25.02	41.31	54.00	12.69	PASS	Vertical	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2402Mhz
Remark:	\	Test_Date	2026/6/17


Test Graph

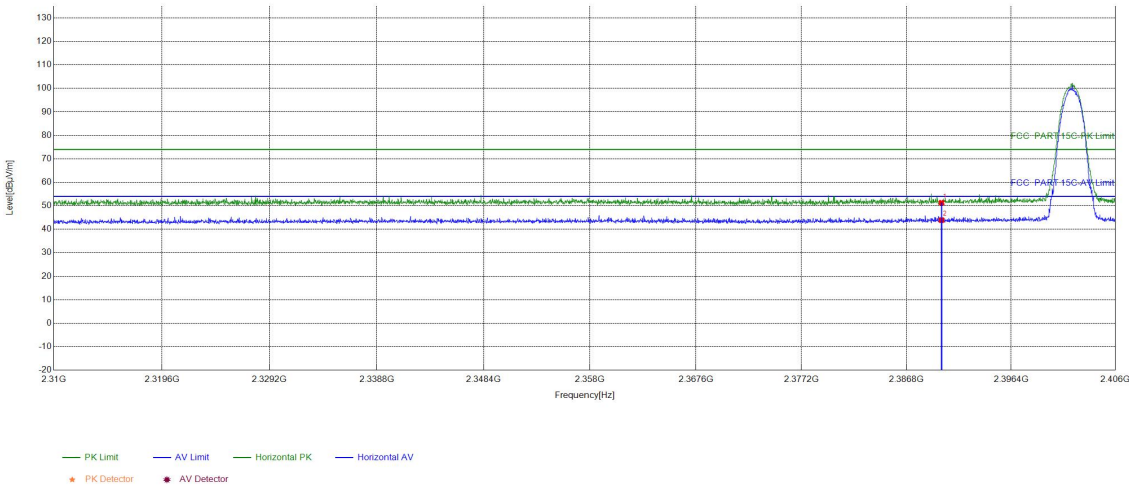

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.32	51.28	74.00	22.72	PASS	Horizont	PK
2	2390	15.96	27.93	43.89	54.00	10.11	PASS	Horizont	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2402Mhz
Remark:	\	Test_Date	2026/6/17


Test Graph

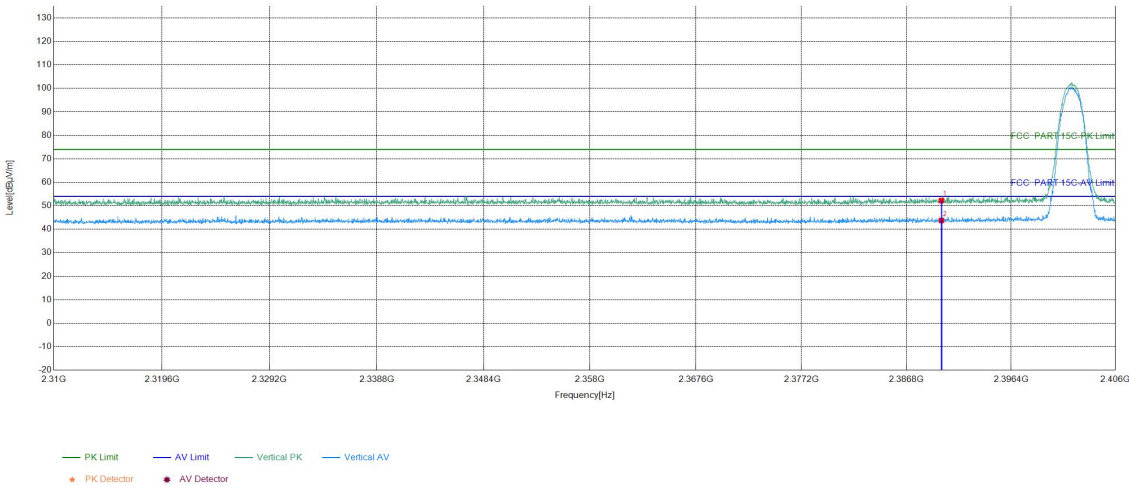

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.29	52.25	74.00	21.75	PASS	Vertical	PK
2	2390	15.96	27.79	43.75	54.00	10.25	PASS	Vertical	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2480Mhz
Remark:	\	Test_Date	2026/6/17


Test Graph

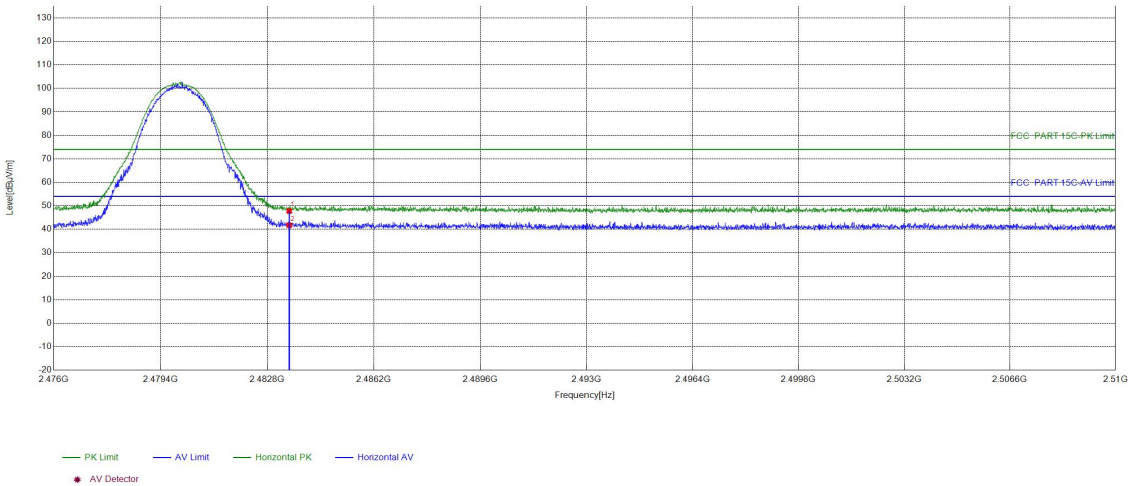

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	31.47	47.76	74.00	26.24	PASS	Horizont	PK
2	2483.5	16.29	25.45	41.74	54.00	12.26	PASS	Horizont	AV

Test_Mode	8DPSK Transmitting	Test_Frequency	2480Mhz
Remark:	\	Test_Date	2026/6/17

Test Graph

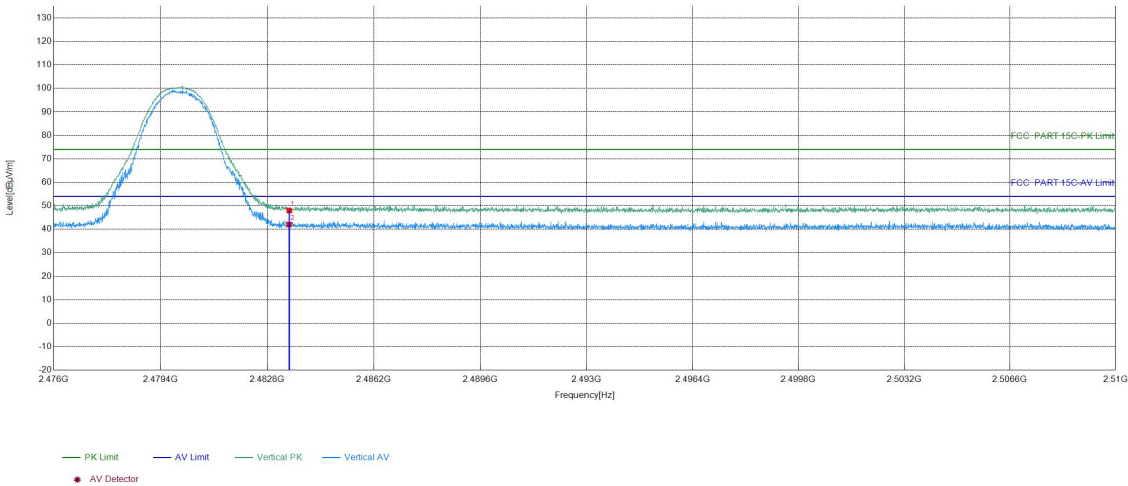

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	31.71	48.00	74.00	26.00	PASS	Vertical	PK
2	2483.5	16.29	25.74	42.03	54.00	11.97	PASS	Vertical	AV

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

5 Appendix A

Refer to Appendix: Bluetooth Classic of EED32S80800402

6 PHOTOGRAPHS

Refer to Appendix Photographs of Report No. EED32S80800401.

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***