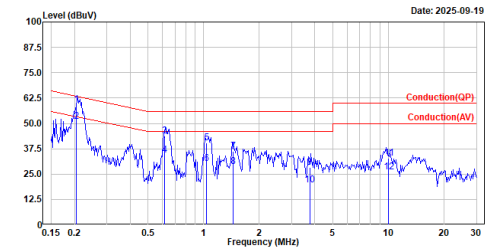
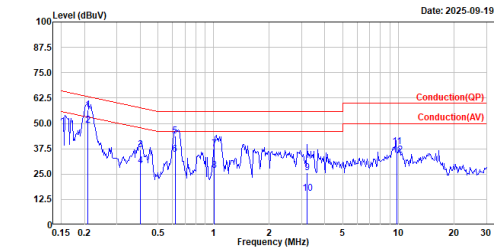


Appendix A. Test Result of AC Power Line Conducted Emission


TX_30-1GHz_Line								TX_30-1GHz_Neutral							
Site :HY-SR01 Condition :Line Mode :TX_30-1GHz test by :Kevin								Site :HY-SR01 Condition :Neutral Mode :TX_30-1GHz test by :Kevin							
															
No.	Frequency	Level	Limit	Over	Read	Factor	Remark	No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	dB	dBuV	dB			MHz	dBuV	dBuV	dB	dBuV	dB	
1	0.205	59.08	63.40	-4.32	49.52	9.56	QP	1	0.209	56.55	63.23	-6.68	46.97	9.58	QP
2	0.205	58.94	53.40	-2.46	41.38	9.56	Average	2	0.209	49.16	53.23	-4.07	39.58	9.58	Average
3	0.614	43.94	56.00	-12.06	34.34	9.60	QP	3	0.403	37.11	57.00	-20.69	27.53	9.58	QP
4	0.614	34.29	46.00	-11.71	24.69	9.60	Average	4	0.403	29.03	47.00	-18.77	19.45	9.58	Average
5	1.037	40.20	56.00	-15.80	30.57	9.63	QP	5	0.618	43.94	56.00	-12.06	34.34	9.60	QP
6	1.037	30.09	46.00	-15.91	20.46	9.63	Average	6	0.618	34.80	46.00	-11.20	25.20	9.60	Average
7	1.451	36.41	56.00	-19.59	26.74	9.67	QP	7	1.012	37.48	56.00	-18.52	27.85	9.63	QP
8	1.451	28.85	46.00	-17.15	19.18	9.67	Average	8	1.012	26.71	46.00	-19.29	17.08	9.63	Average
9	3.749	28.32	56.00	-27.68	18.39	9.93	QP	9	3.208	25.55	56.00	-30.45	15.67	9.88	QP
10	3.749	19.45	46.00	-26.55	9.52	9.93	Average	10	3.208	15.61	46.00	-30.39	5.73	9.88	Average
11	10.028	32.96	60.00	-27.04	22.77	10.19	QP	11	9.795	38.48	60.00	-21.52	28.24	10.24	QP
12	10.028	25.91	50.00	-24.09	15.72	10.19	Average	12	9.795	34.40	50.00	-15.60	24.16	10.24	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line


Appendix B. Test Result of 20dB Bandwidth

Modulation	Frequency (GHz)	Measure Level (MHz)	Limit (MHz)	Result
FMCW	24.205	62.6	-	Pass

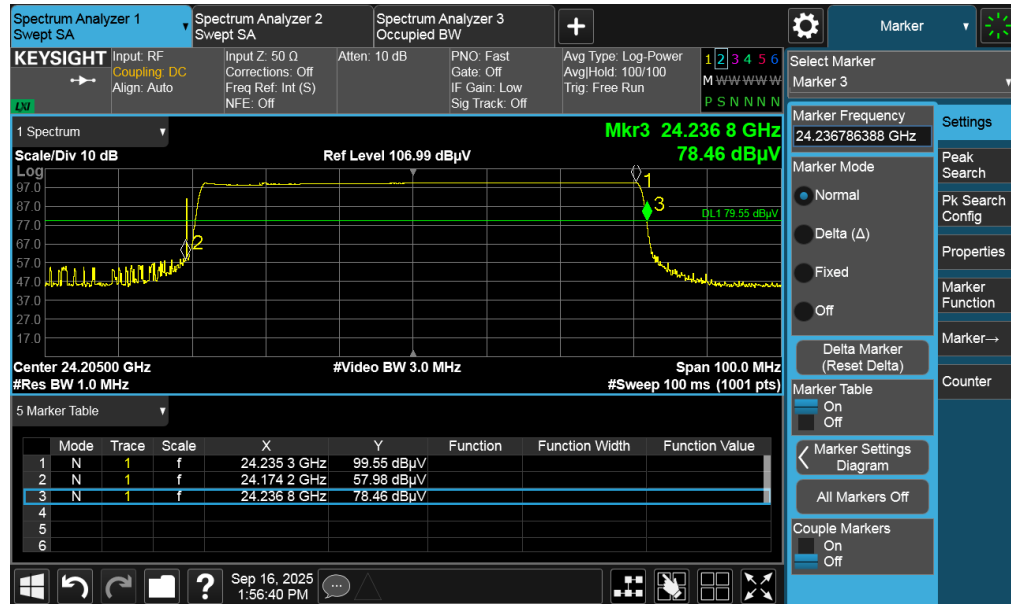

Appendix C. Test Result of Field Strength of Fundamental

Site :HY-CB02
 Condition :1m ,Horizontal
 mode :TX_X_24.205GHz
 Test by :nova
 set :

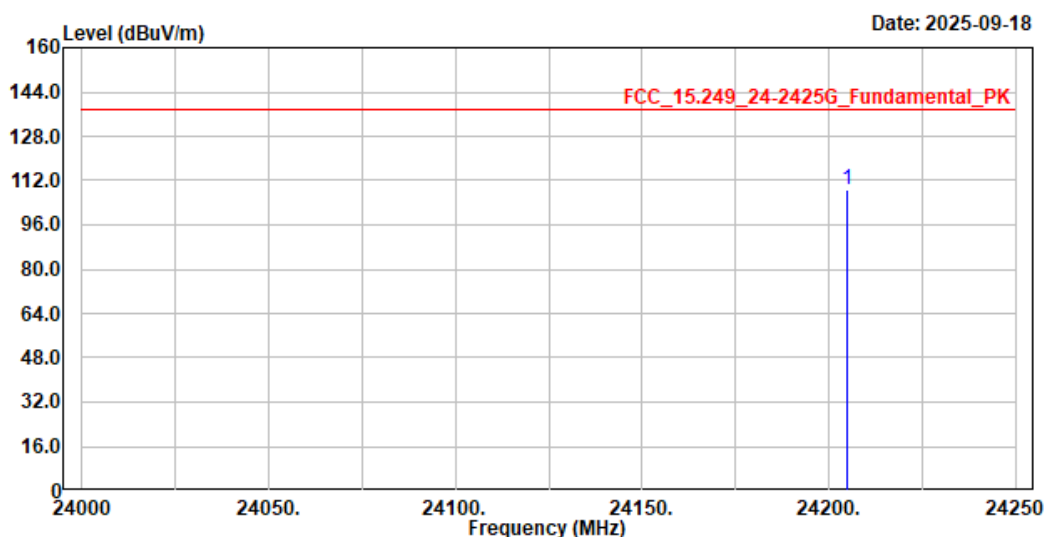

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	24205.000	108.74	137.49	-28.75	99.64	9.10	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
24205	108.74	-16.850	91.890	-25.600	117.490

Site :HY-CB02
Condition :1m ,Vertical
mode :TX_X_24.205GHz
Test by :nova
set :

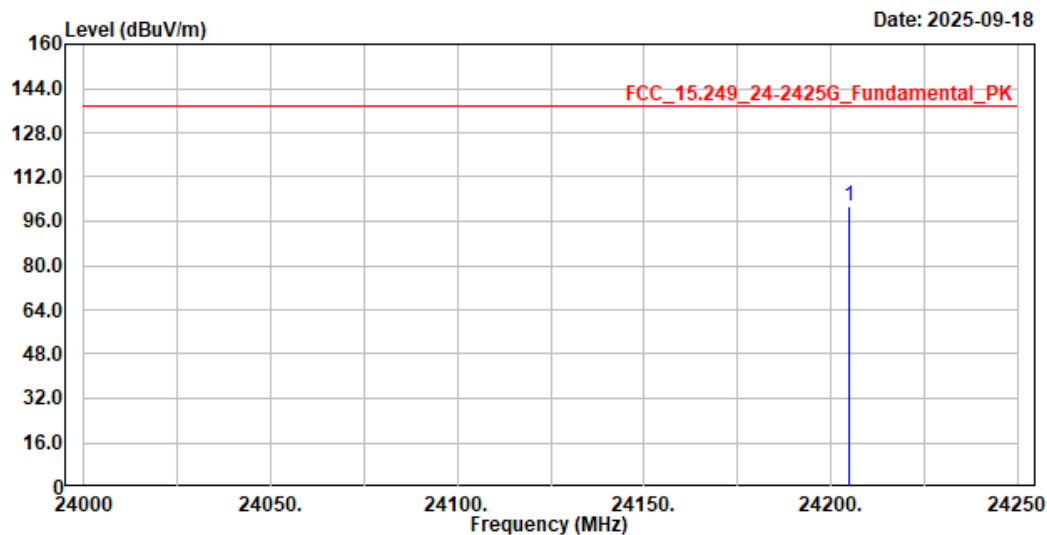

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	24205.000	101.44	137.49	-36.05	92.34	9.10	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
24205	101.44	-16.850	84.590	-32.900	117.490

Site :HY-CB02
 Condition :1m ,Horizontal
 mode :TX_Y_24.205GHz
 Test by :nova
 set :

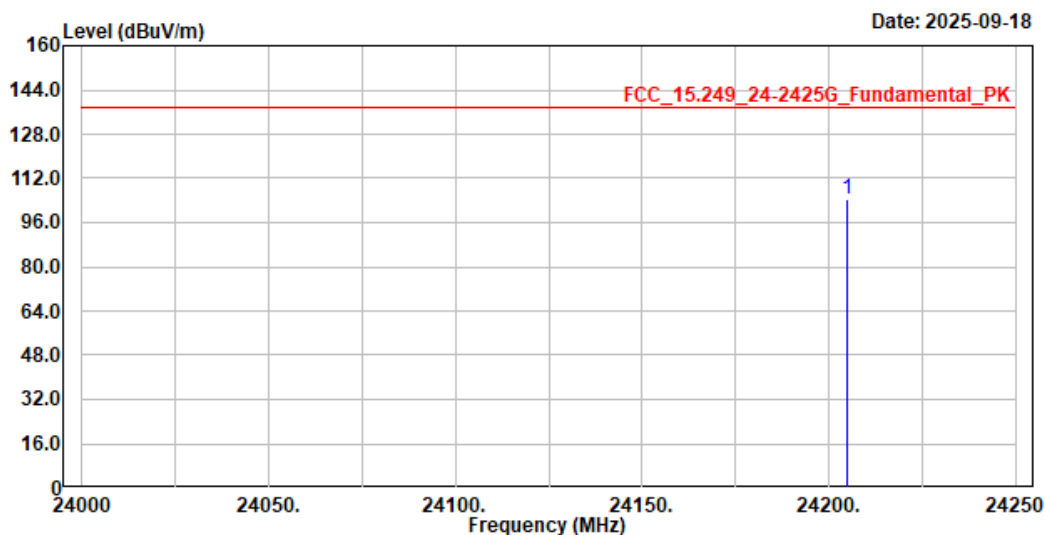

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	24205.000	104.70	137.49	-32.79	95.60	9.10	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
24205	104.7	-16.850	87.850	-29.640	117.490

Site :HY-CB02
Condition :1m ,Vertical
mode :TX_Y_24.205GHz
Test by :nova
set :

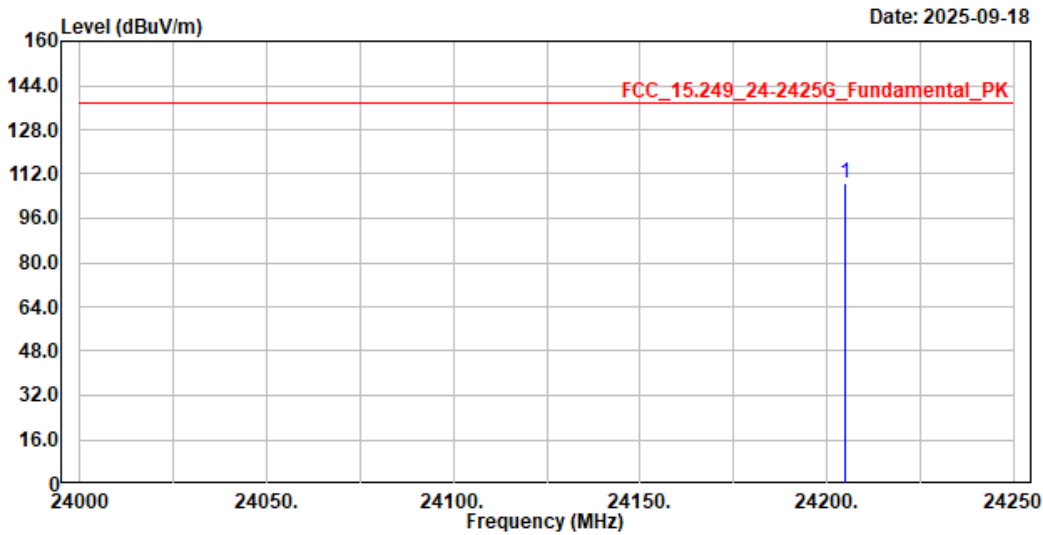

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	24205.000	108.49	137.49	-29.00	99.39	9.10	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
24205	108.49	-16.850	91.640	-25.850	117.490

Site :HY-CB02
 Condition :1m ,Horizontal
 mode :TX_Z_24.205GHz
 Test by :nova
 set :

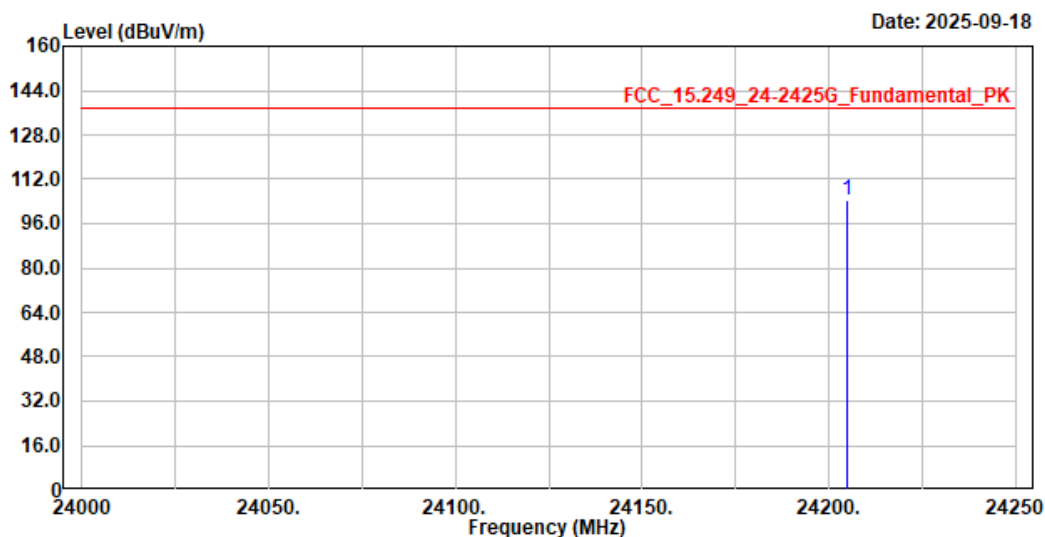

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	24205.000	104.48	137.49	-33.01	95.38	9.10	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
24205	104.48	-16.850	87.630	-29.860	117.490

Site :HY-CB02
Condition :1m ,Vertical
mode :TX_Z_24.205GHz
Test by :nova
set :

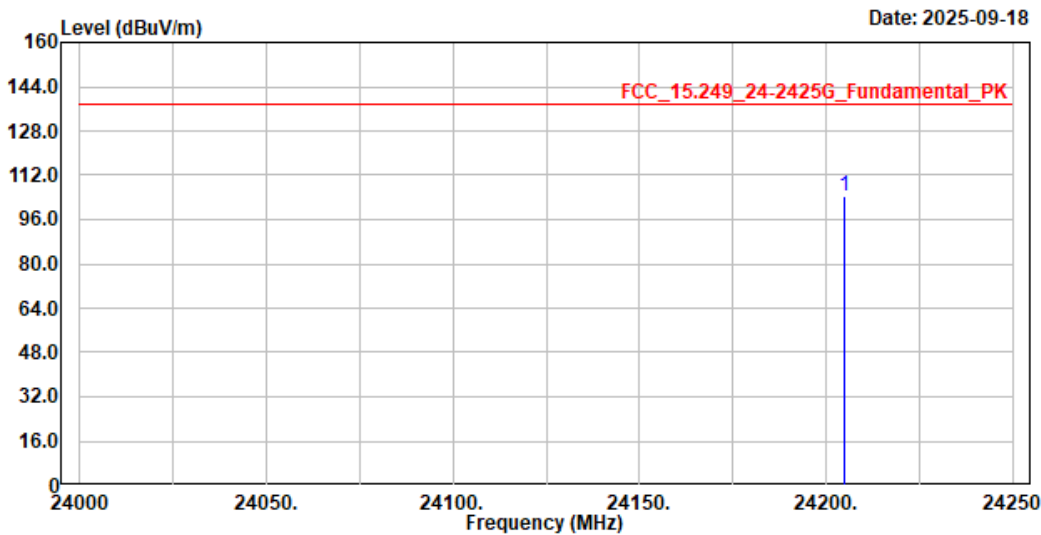

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	24205.000	104.57	137.49	-32.92	95.47	9.10	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
24205	104.57	-16.850	87.720	-29.770	117.490

Appendix D. Test Result of Radiated Emissions

Site :HY-CB02
 Condition :3m ,HORIZONTAL
 mode :TX_1-18GHz
 Test by :nova

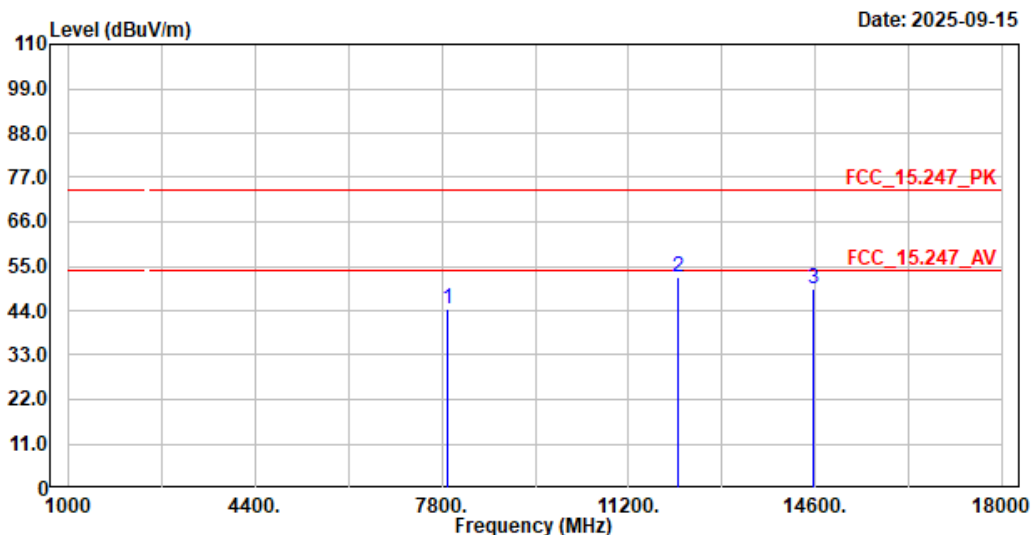


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7895.200	44.34	74.00	-29.66	50.20	-5.86	Peak
2	12099.300	52.34	74.00	-21.66	54.07	-1.73	Peak
3	14572.800	49.37	74.00	-24.63	48.19	1.18	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
 Condition :3m ,VERTICAL
 mode :TX_1-18GHz
 Test by :nova

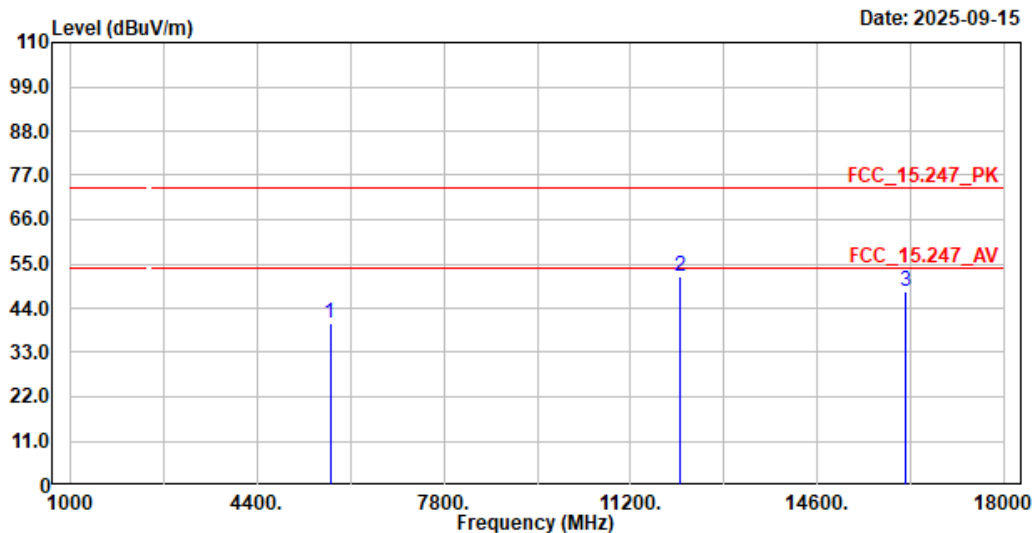


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBUV/m	dBUV/m	dB	dBUV	dB/m	
1	5727.700	40.45	74.00	-33.55	48.53	-8.08	Peak
2	12106.100	52.02	74.00	-21.98	53.75	-1.73	Peak
3	16209.900	47.98	74.00	-26.02	45.96	2.02	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
 Condition :1m ,Horizontal
 mode :TX_18-40GHz
 Test by :nova

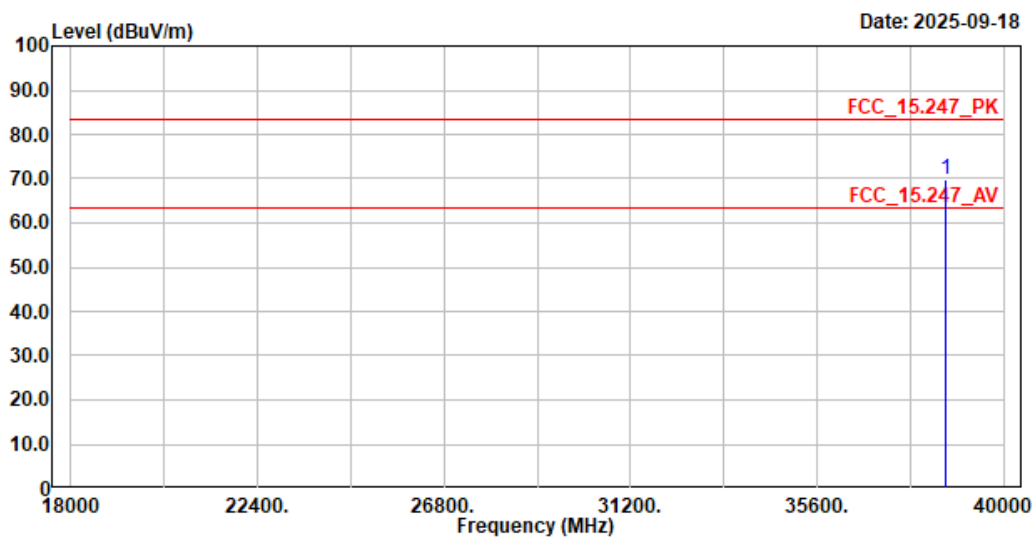

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	38632.300	69.71	83.54	-13.83	52.45	17.26	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
38632.3	69.71	-16.850	52.860	-10.680	63.540

Site :HY-CB02
 Condition :1m ,Vertical
 mode :TX_18-40GHz
 Test by :nova

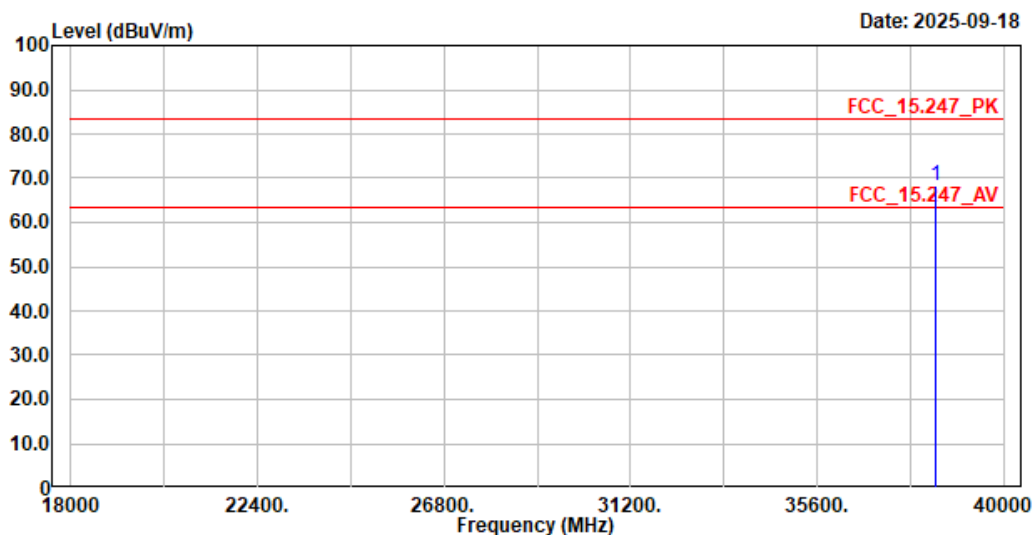

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	38401.300	68.24	83.54	-15.30	51.91	16.33	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
38401.3	68.24	-16.850	51.390	-12.150	63.540

Site :HY-CB02
 Condition :3m ,HORIZONTAL
 mode :TX_30-1GHz
 Test by :nova

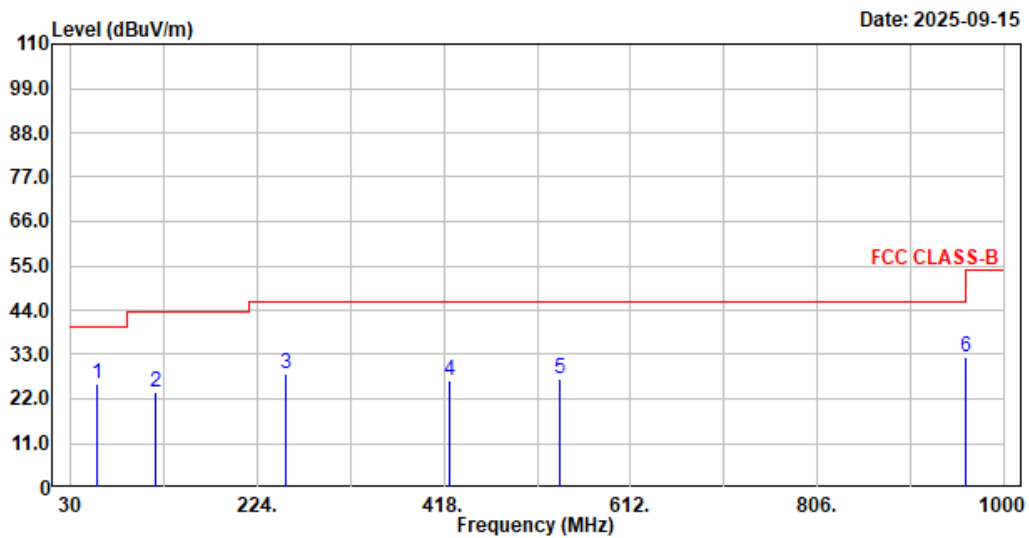


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	57.936	25.83	40.00	-14.17	36.30	-10.47	QP
2	117.591	23.77	43.50	-19.73	36.95	-13.18	QP
3	253.876	28.26	46.00	-17.74	40.14	-11.88	QP
4	424.014	26.59	46.00	-19.41	33.77	-7.18	QP
5	538.086	27.14	46.00	-18.86	32.03	-4.89	QP
6	960.618	32.45	54.00	-21.55	31.13	1.32	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
 Condition :3m ,VERTICAL
 mode :TX_30-1GHz
 Test by :nova

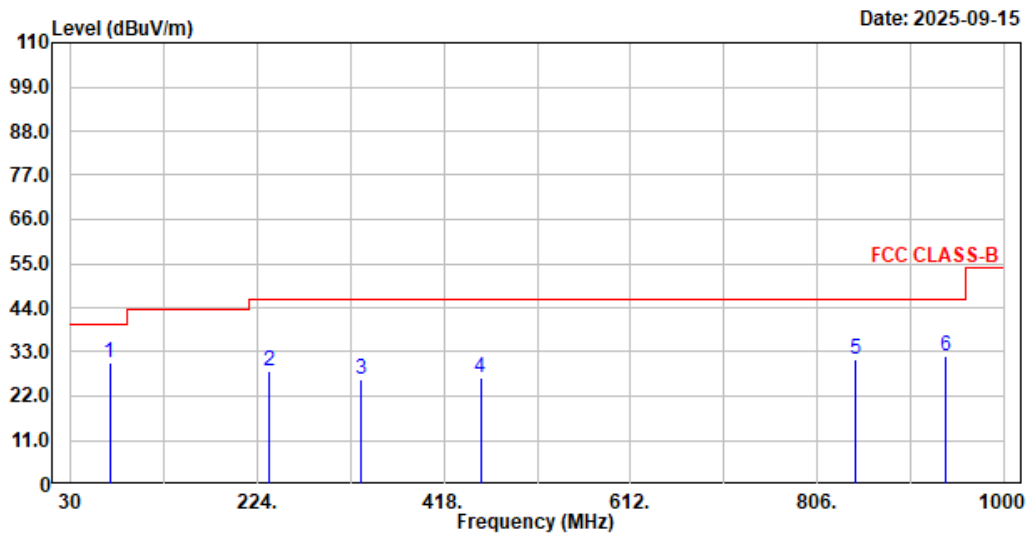


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	70.546	30.32	40.00	-9.68	43.34	-13.02	QP
2	235.737	28.05	46.00	-17.95	40.46	-12.41	QP
3	332.349	26.22	46.00	-19.78	35.37	-9.15	QP
4	456.024	26.53	46.00	-19.47	32.71	-6.18	QP
5	845.091	31.02	46.00	-14.98	31.15	-0.13	QP
6	940.345	32.16	46.00	-13.84	31.16	1.00	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
 Condition :1m ,Horizontal
 mode :TX_40-50GHz
 Test by :nova

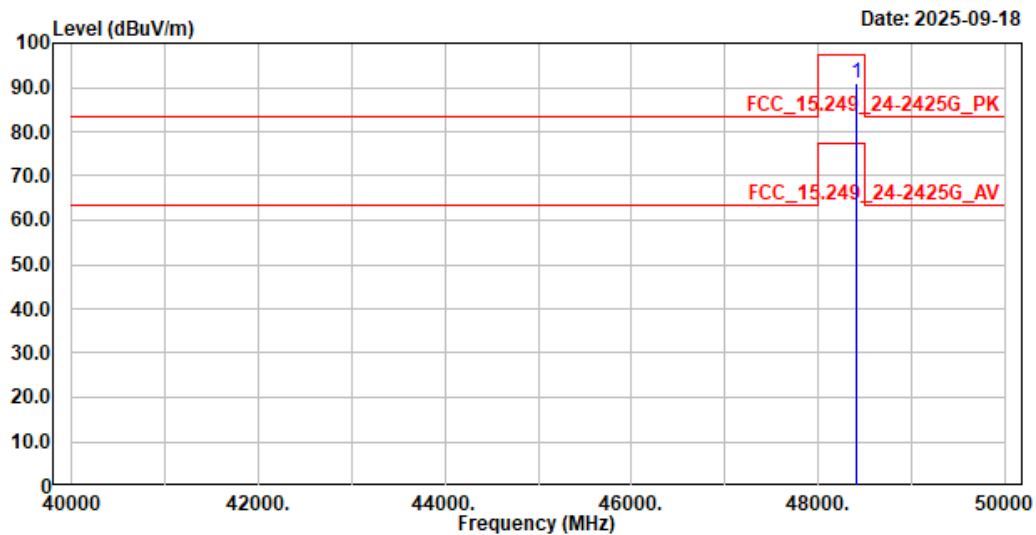

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	48410.000	90.85	97.50	-6.65	86.49	4.36	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
48410	90.85	-16.850	74.000	-3.490	77.490

Site :HY-CB02
 Condition :1m ,Vertical
 mode :TX_40-50GHz
 Test by :nova

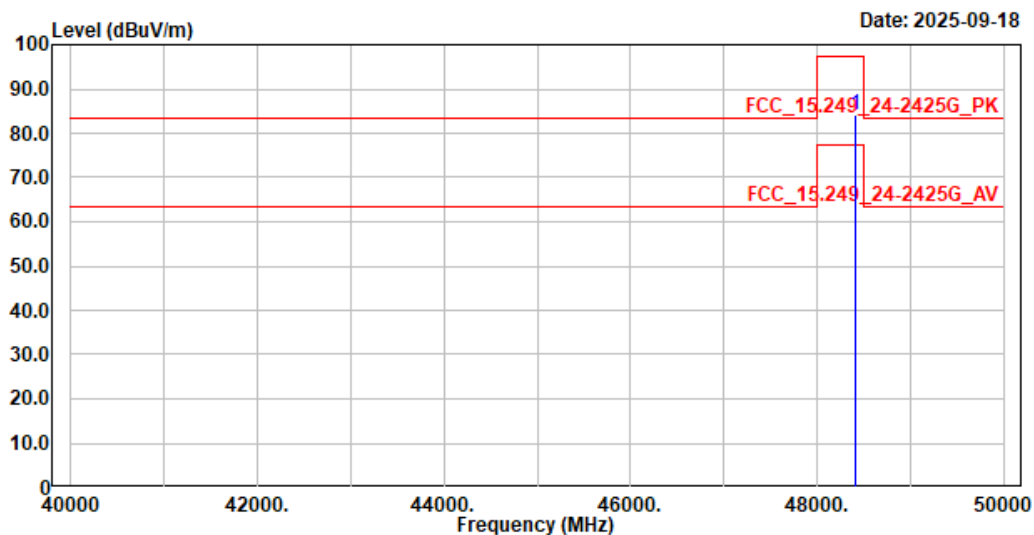

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	48410.000	84.33	97.50	-13.17	79.97	4.36	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamplifier Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
48410	84.33	-16.850	67.480	-10.010	77.490

Site :HY-CB02
 Condition :1m ,HORIZONTAL
 mode :TX_50-75GHz
 Test by :nova

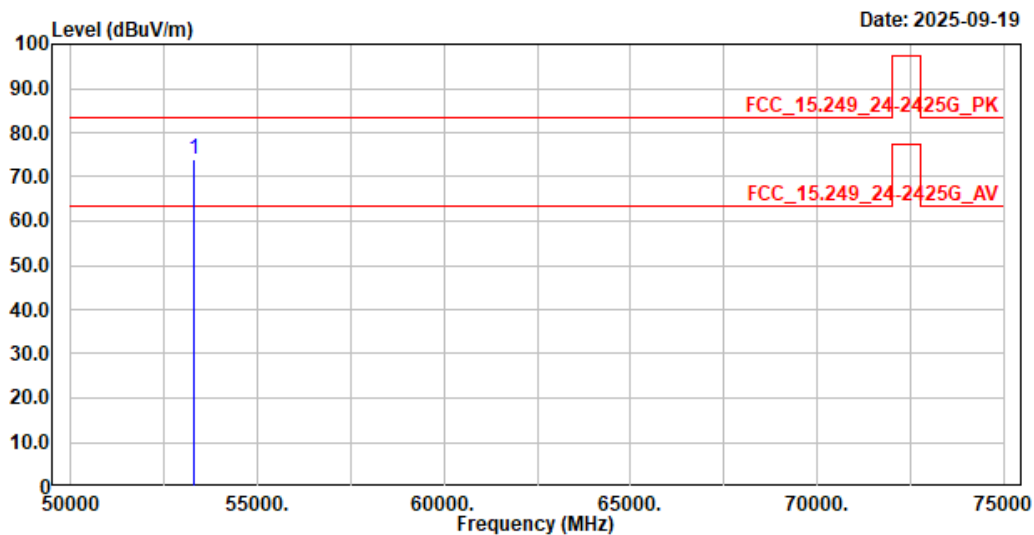

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	53309.000	73.94	83.54	-9.60	14.76	59.18	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
53309	83.46	-16.850	66.610	-10.890	77.500

Site :HY-CB02
 Condition :1m ,VERTICAL
 mode :TX_50-75GHz
 Test by :nova

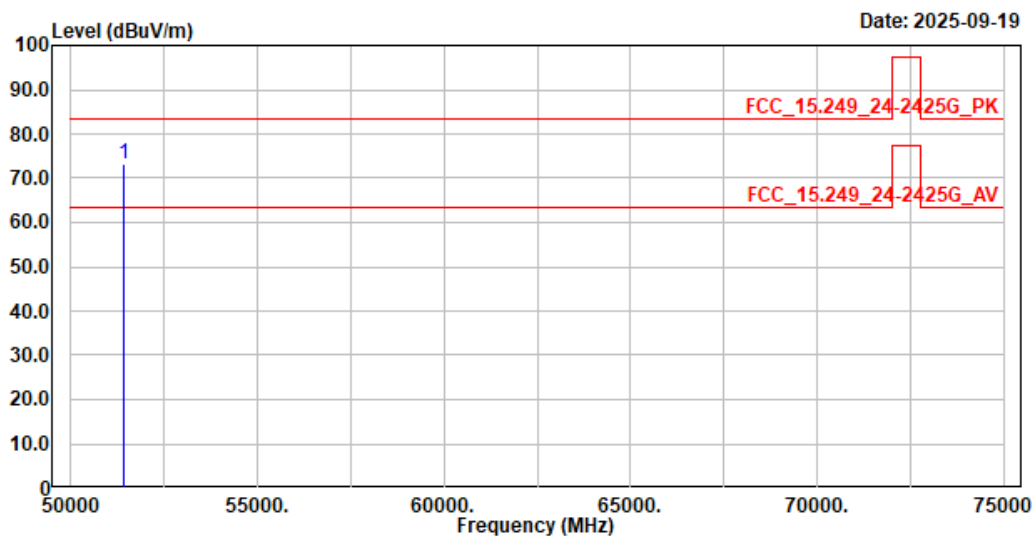

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	51435.000	73.03	83.54	-10.51	14.92	58.11	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
51435	73.2	-16.850	56.350	-7.190	63.540

Site :HY-CB02
 Condition :1m ,HORIZONTAL
 mode :TX_75-100GHz
 Test by :nova

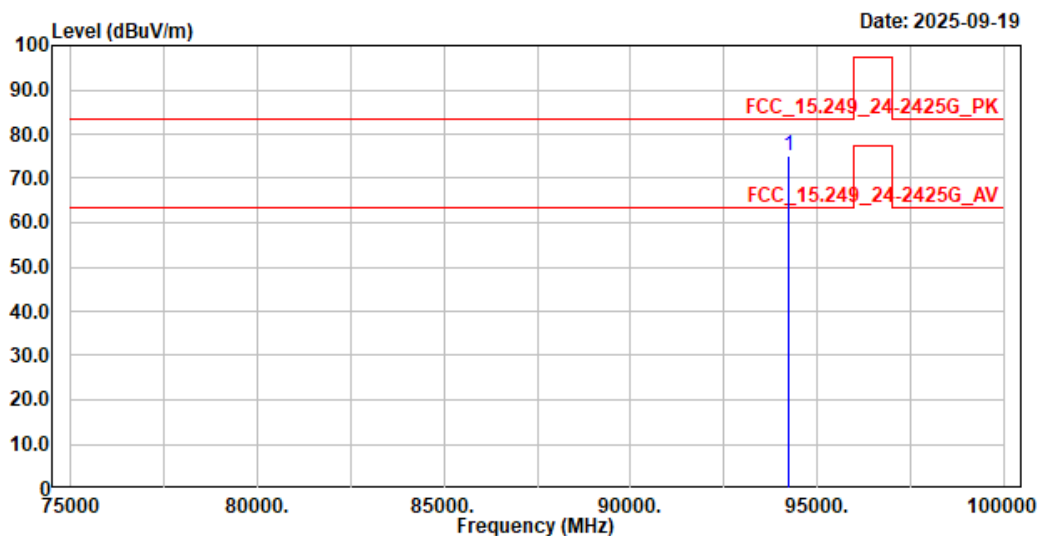

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	94253.000	75.18	83.54	-8.36	15.09	60.09	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
94253	75.36	-16.850	58.510	-5.030	63.540

Site :HY-CB02
 Condition :1m ,VERTICAL
 mode :TX_75-100GHz
 Test by :nova

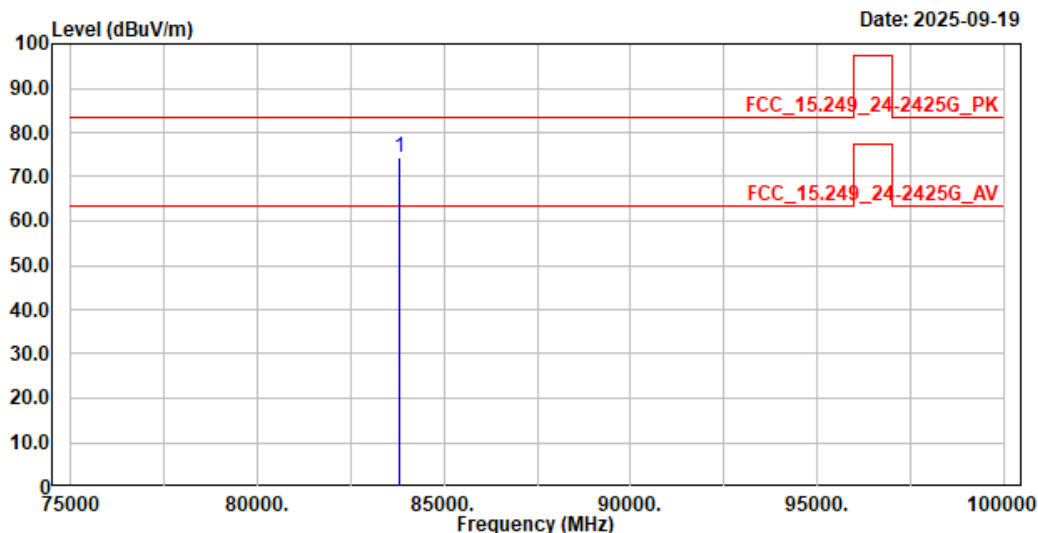

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	83830.000	74.43	83.54	-9.11	15.02	59.41	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
83830	75.81	-16.850	58.960	-4.580	63.540

Site :HY-CB02
 Condition :1m ,Horizontal
 mode :TX_24205MHz
 Test by :Nova
 set :

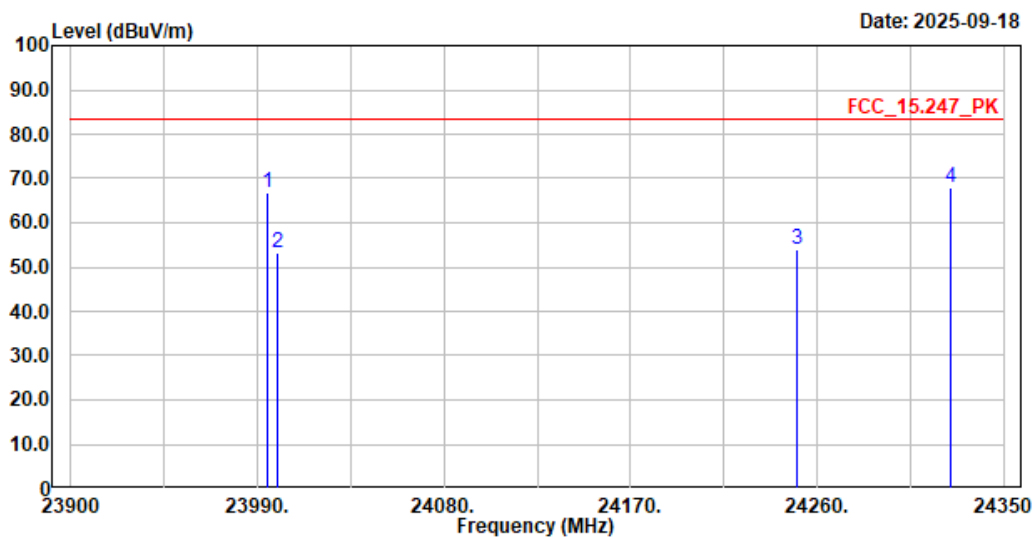

No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	23995.300	66.94	83.54	-16.60	57.81	9.13	Peak
2	24000.000	53.34	83.54	-30.20	44.21	9.13	Peak
3	24250.000	54.03	83.54	-29.51	44.94	9.09	Peak
4	24324.000	67.96	83.54	-15.58	58.88	9.08	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
23995.3	66.94	-16.850	50.090	-13.450	63.540
24000	53.34	-16.850	36.490	-27.050	63.540
24250	54.03	-16.850	37.180	-26.360	63.540
24324	67.96	-16.850	51.110	-12.430	63.540

Site :HY-CB02
 Condition :1m ,Vertical
 mode :TX_24205MHz
 Test by :Nova
 set :

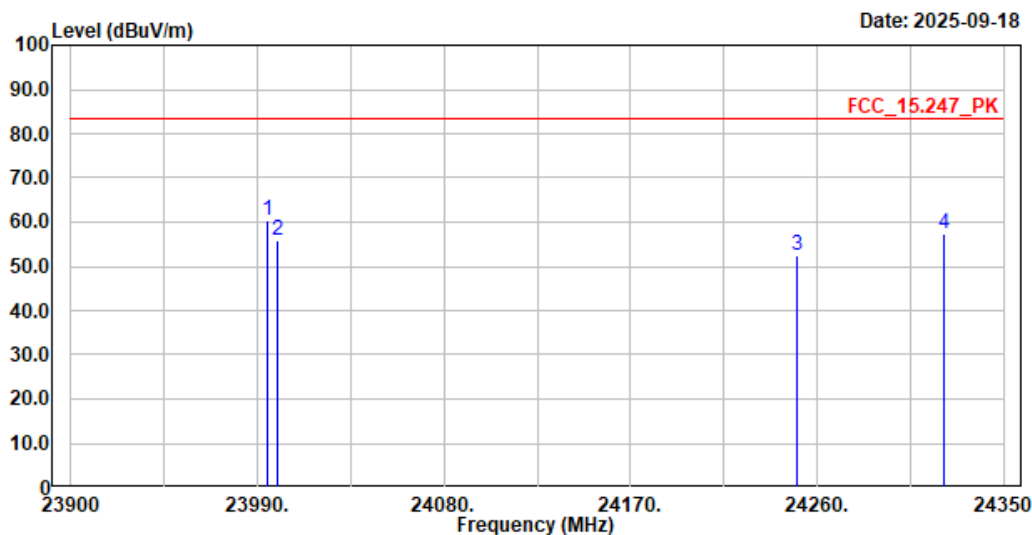

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level		
			dBuV/m	dB	dBuV	dB/m	
1	23995.300	60.31	83.54	-23.23	51.18	9.13	Peak
2	24000.000	55.82	83.54	-27.72	46.69	9.13	Peak
3	24250.000	52.46	83.54	-31.08	43.37	9.09	Peak
4	24321.500	57.26	83.54	-26.28	48.18	9.08	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamplifier Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dBμV/m)	Duty Cycle Factor (dB)	Measurement Level (dBμV/m)	Margin (dB)	Limit (dBμV/m)
23995.3	60.31	-16.850	43.460	-20.080	63.540
24000	55.82	-16.850	38.970	-24.570	63.540
24250	52.46	-16.850	35.610	-27.930	63.540
24321.5	57.26	-16.850	40.410	-23.130	63.540

Radiated Emissions Co-location

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :co-location_RADAR + BLE 1M 2402MHz + ANT+
Test by :Nova

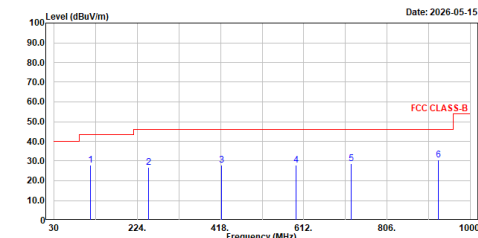


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	114.904	27.74	43.50	-15.76	41.19	-13.45	QP
2	250.161	26.71	46.00	-19.29	38.75	-12.04	QP
3	420.020	27.85	46.00	-18.15	35.40	-7.55	QP
4	593.379	27.98	46.00	-18.02	31.70	-3.72	QP
5	721.836	28.69	46.00	-17.31	30.46	-1.77	QP
6	924.996	30.67	46.00	-15.33	30.05	0.62	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :co-location_RADAR + BLE 1M 2402MHz + ANT+
Test by :Nova

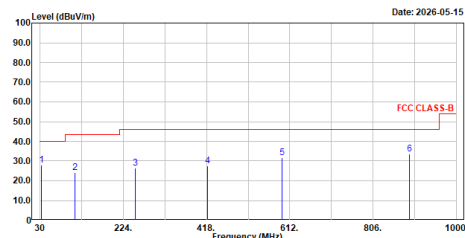


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	33.200	27.77	40.00	-12.23	38.72	-10.95	QP
2	111.504	24.28	43.50	-19.22	37.98	-13.70	QP
3	252.011	26.55	46.00	-19.45	38.58	-12.03	QP
4	420.020	27.40	46.00	-18.60	34.95	-7.55	QP
5	593.429	31.58	46.00	-14.42	35.30	-3.72	QP
6	890.144	33.69	46.00	-12.31	33.68	0.01	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :co-location_RADAR + BLE 1M 2402MHz + ANT+
Test by :Nova

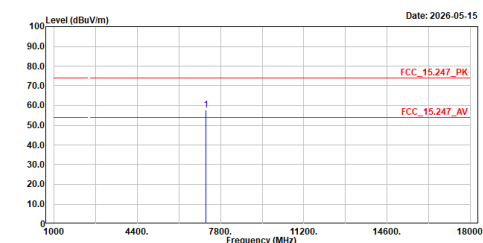


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7206.000	57.67	74.00	-16.33	62.73	-5.06	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :3m ,VERTICAL
mode :co-location_RADAR + BLE 1M 2402MHz + ANT+
Test by :Nova

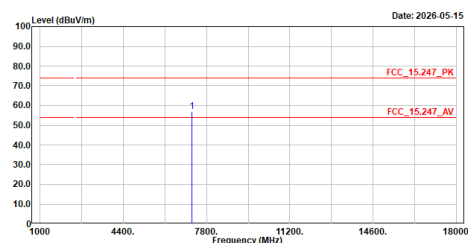


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	7206.000	57.03	74.00	-16.97	62.22	-5.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7206MHz is not in restricted band, its limit is 20dBc of the fundamental emission level.


Site :HY-CB02
Condition :3m ,HORIZONTAL
mode :co-location_RADAR + BLE 1M 2402MHz + ANT+
Test by :Nova

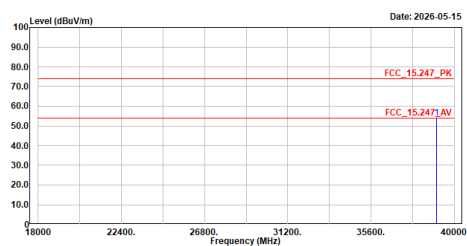

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	39058.810	53.92	74.00	-20.08	44.78	9.14	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :3m ,VERTICAL
mode :co-location_RADAR + BLE 1M 2402MHz + ANT+
Test by :Nova

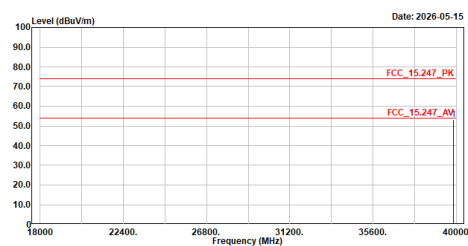

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	39868.690	53.33	74.00	-20.67	42.23	11.10	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB02
Condition :1m ,Horizontal
mode :co-location_RADAR + BLE 1M 2402MHz + ANT+
Test by :Nova

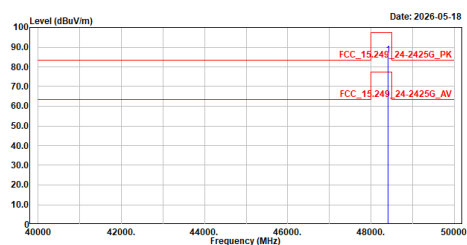

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	48410.000	85.91	97.50	-11.59	81.71	4.20	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB02
Condition :1m ,VERTICAL
mode :co-location_RADAR + BLE 1M 2402MHz + ANT+
Test by :Nova

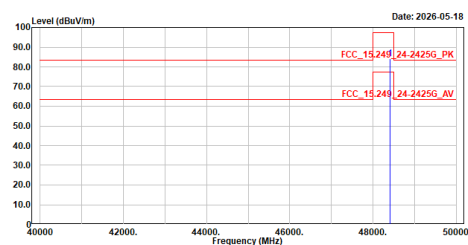

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	48410.000	84.07	97.50	-13.43	79.62	4.45	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

Frequency (MHz)	Peak Measurement (dB μ V/m)	Duty Cycle Factor (dB)	Measurement Level (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)
48410	85.91	-16.85	69.06	-8.44	77.50

Vertical-Average Detector:

Frequency (MHz)	Peak Measurement (dB μ V/m)	Duty Cycle Factor (dB)	Measurement Level (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)
48410	84.07	-16.85	67.22	-10.28	77.50