



Shenzhen CTL Testing Technology Co., Ltd.

Fl.A1, Bldg.A3, No.2533 GuanGuang Road, Fenghuang Community

Fenghuang Street, Guangming District, Shenzhen, Guangdong, P.R.C

Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

Annex for Bluetooth Low Energy

Test Report No.: CTL2602062044-WF02

TABLE OF CONTENTS

1. Duty Cycle	3
1.1 Test Result	3
1.1.1 Ant1	3
1.2 Test Graph.....	4
1.2.1 Ant1	4
2. Bandwidth.....	7
2.1 Test Result	7
2.1.1 OBW	7
2.1.2 6dB BW	7
2.2 Test Graph.....	8
2.2.1 OBW	8
2.2.2 6dB BW	11
3. Maximum Conducted Output Power	14
3.1 Test Result	14
3.1.1 Power	14
4. Maximum Power Spectral Density	15
4.1 Test Result	15
4.1.1 PSD	15
4.2 Test Graph.....	16



Shenzhen CTL Testing Technology Co., Ltd.

Fl.A1, Bldg.A3, No.2533 GuanGuang Road, Fenghuang Community

Fenghuang Street, Guangming District, Shenzhen, Guangdong, PR.C

Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

4.2.1 PSD	16
5. Unwanted Emissions In Non-restricted Frequency Bands.....	19
5.1 Test Result	19
5.1.1 Ref.....	19
5.1.2 CSE	19
5.2 Test Graph.....	20
5.2.1 Ref.....	20
5.2.2 CSE	23

FCC ID: 2ADH6-1901200

1. Duty Cycle

1.1 Test Result


1.1.1 Ant1

Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.399	0.631	63.23	1.99	0.30
		2440	0.400	0.631	63.39	1.98	0.30
		2480	0.400	0.631	63.39	1.98	0.30
2M	SISO	2402	0.218	0.631	34.55	4.62	0.16
		2440	0.218	0.631	34.55	4.62	0.18
		2480	0.217	0.631	34.39	4.64	0.11


FCC ID: 2ADH6-1901200

1.2 Test Graph


1.2.1 Ant1

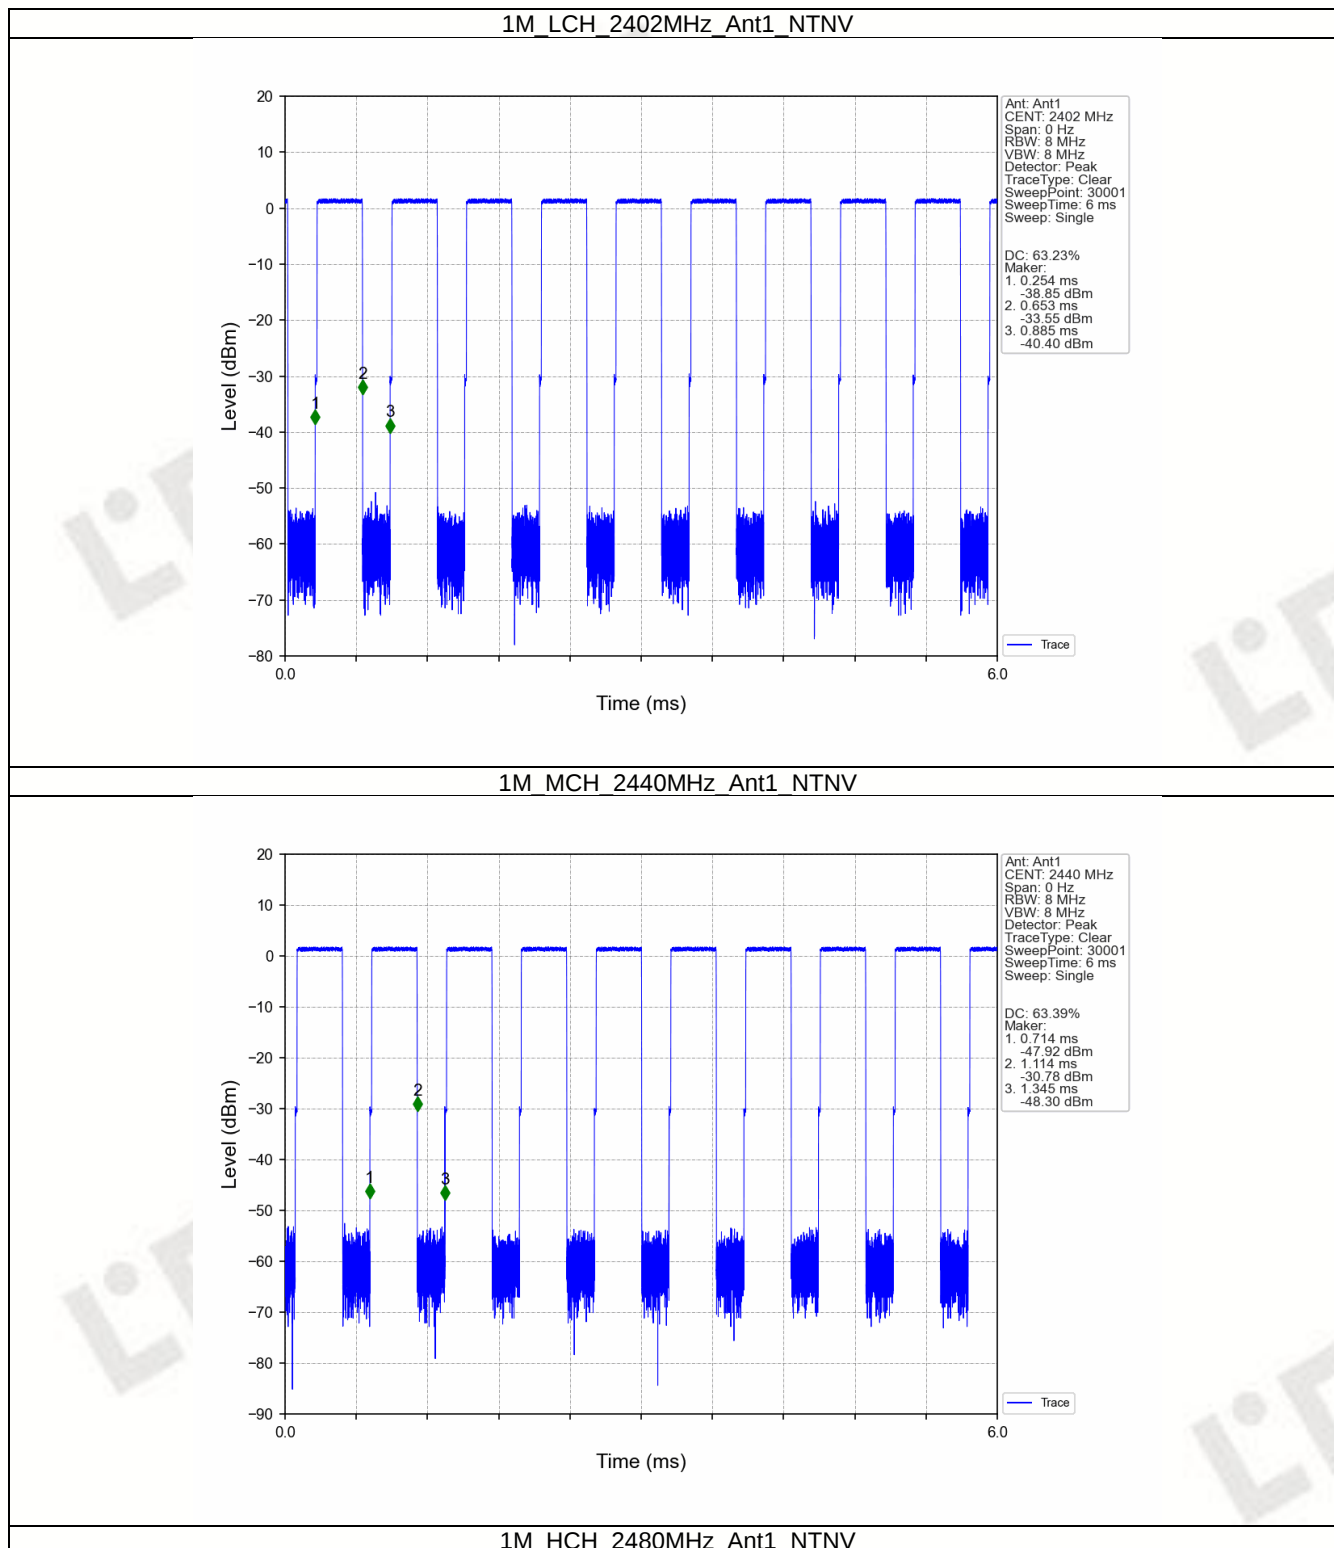


FCC ID: 2ADH6-1901200

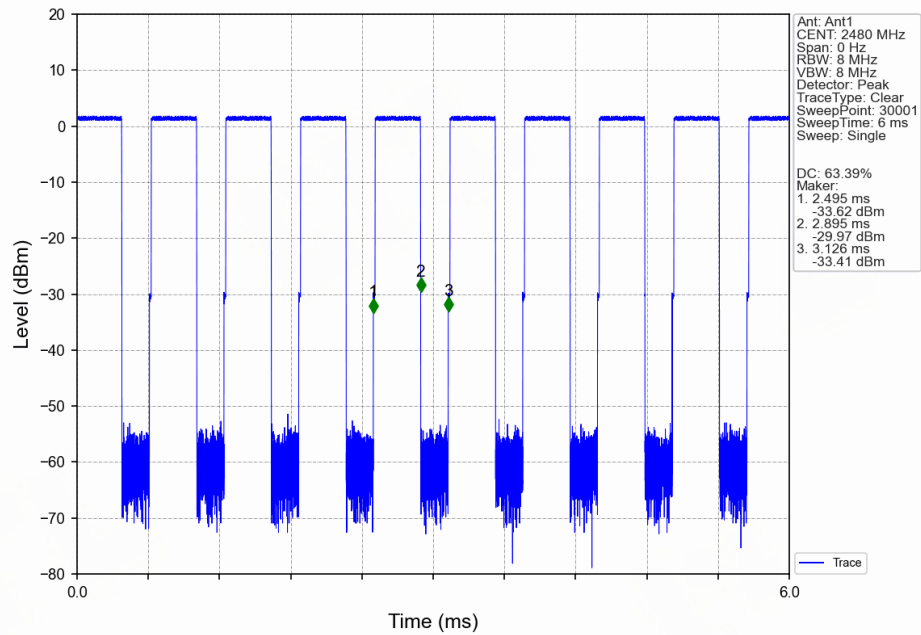

2M_LCH_2402MHz_Ant1_NTNV

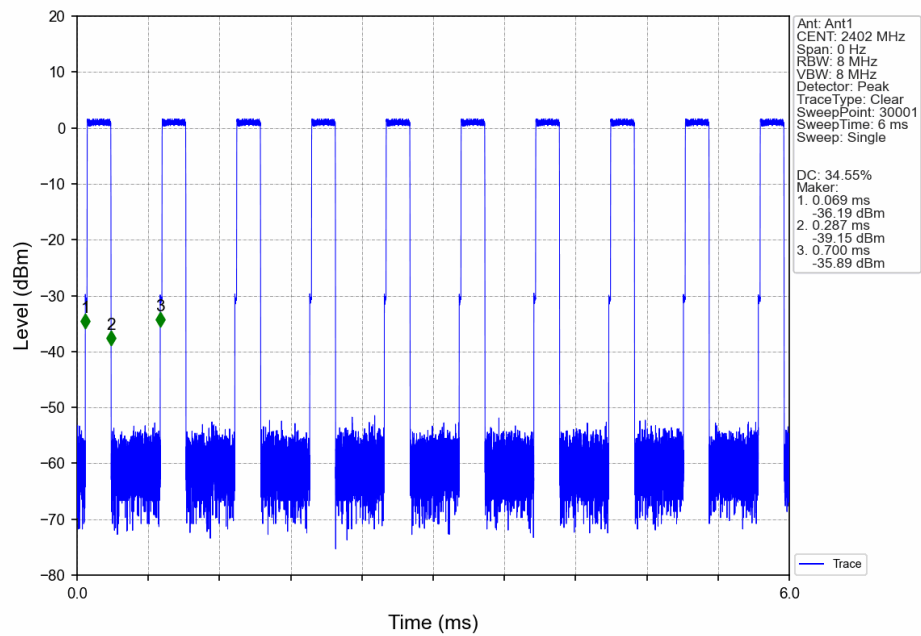

FCC ID: 2ADH6-1901200

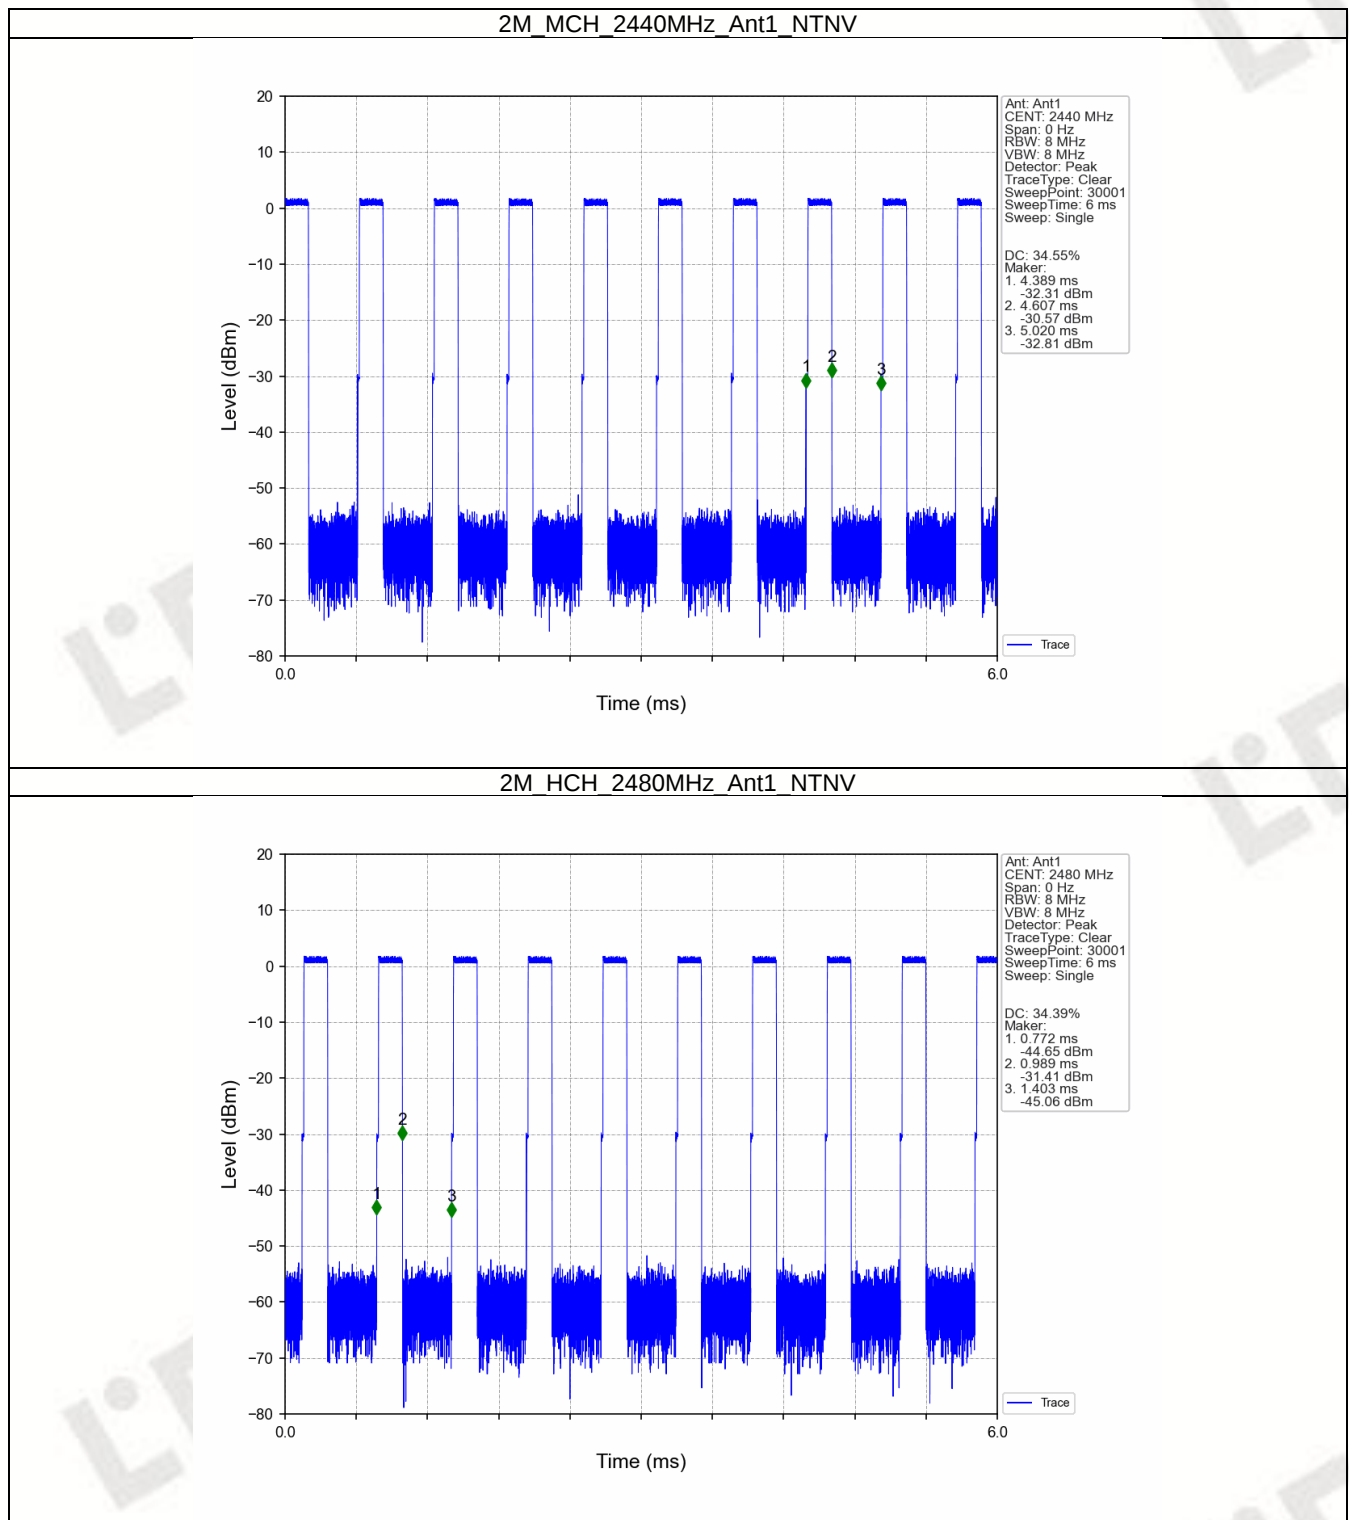

2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.023	/	Pass
		2440	1	1.023	/	Pass
		2480	1	1.022	/	Pass
2M	SISO	2402	1	1.959	/	Pass
		2440	1	1.961	/	Pass
		2480	1	1.957	/	Pass


2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.691	≥ 0.5	Pass
		2440	1	0.695	≥ 0.5	Pass
		2480	1	0.696	≥ 0.5	Pass
2M	SISO	2402	1	1.157	≥ 0.5	Pass
		2440	1	1.150	≥ 0.5	Pass
		2480	1	1.150	≥ 0.5	Pass


FCC ID: 2ADH6-1901200

2.2 Test Graph


2.2.1 OBW

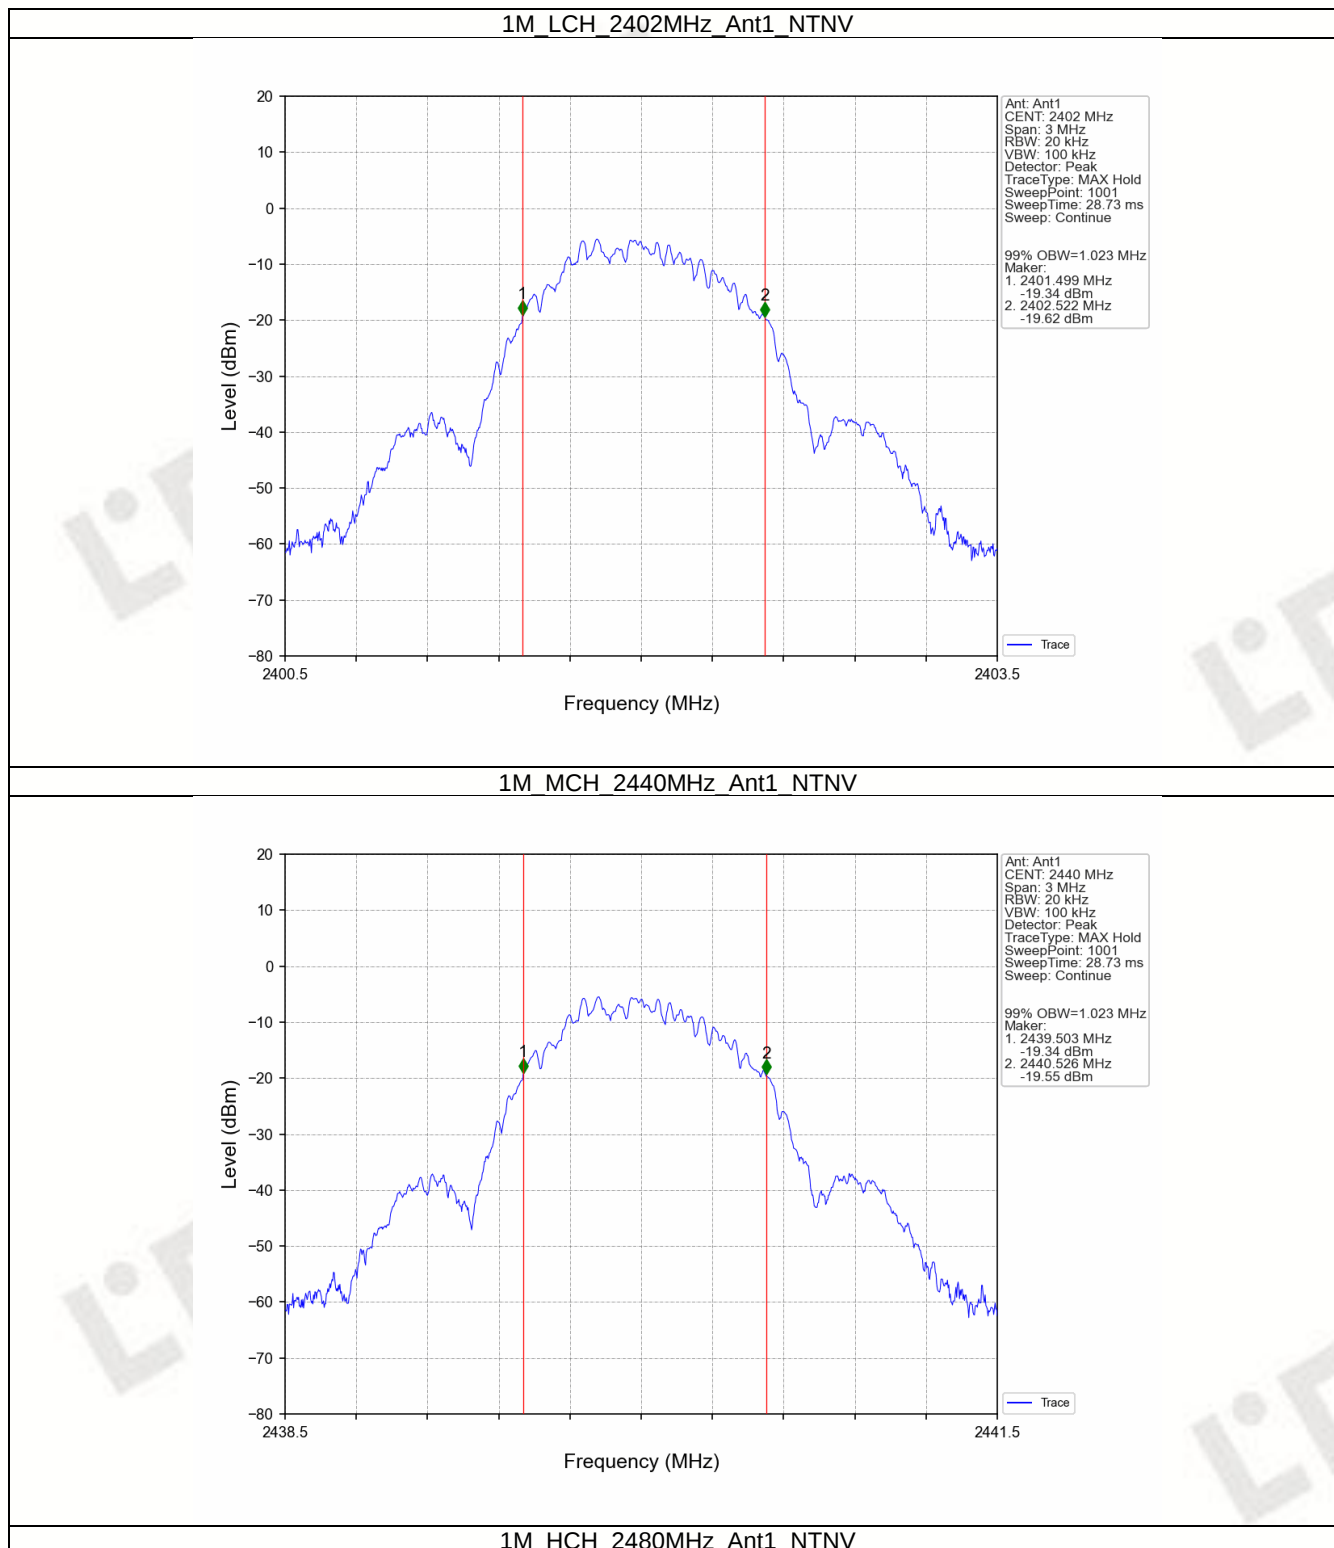


FCC ID: 2ADH6-1901200

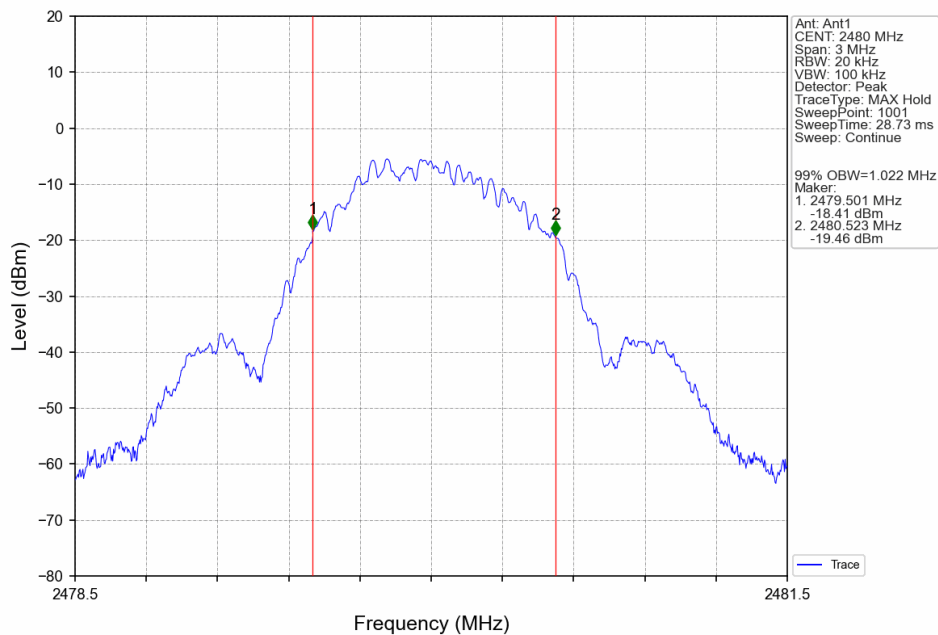

2M_LCH_2402MHz_Ant1_NTNV

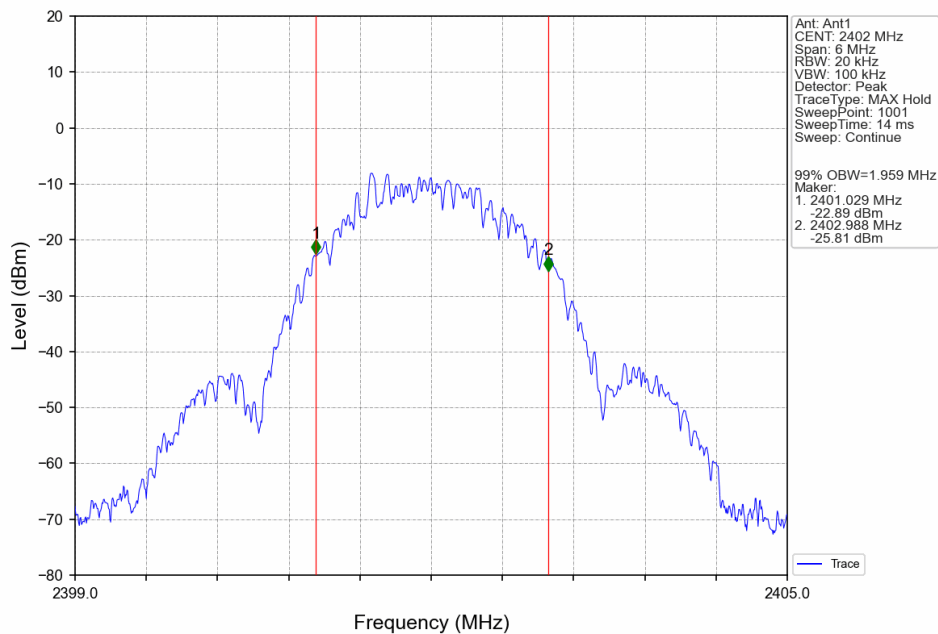


FCC ID: 2ADH6-1901200

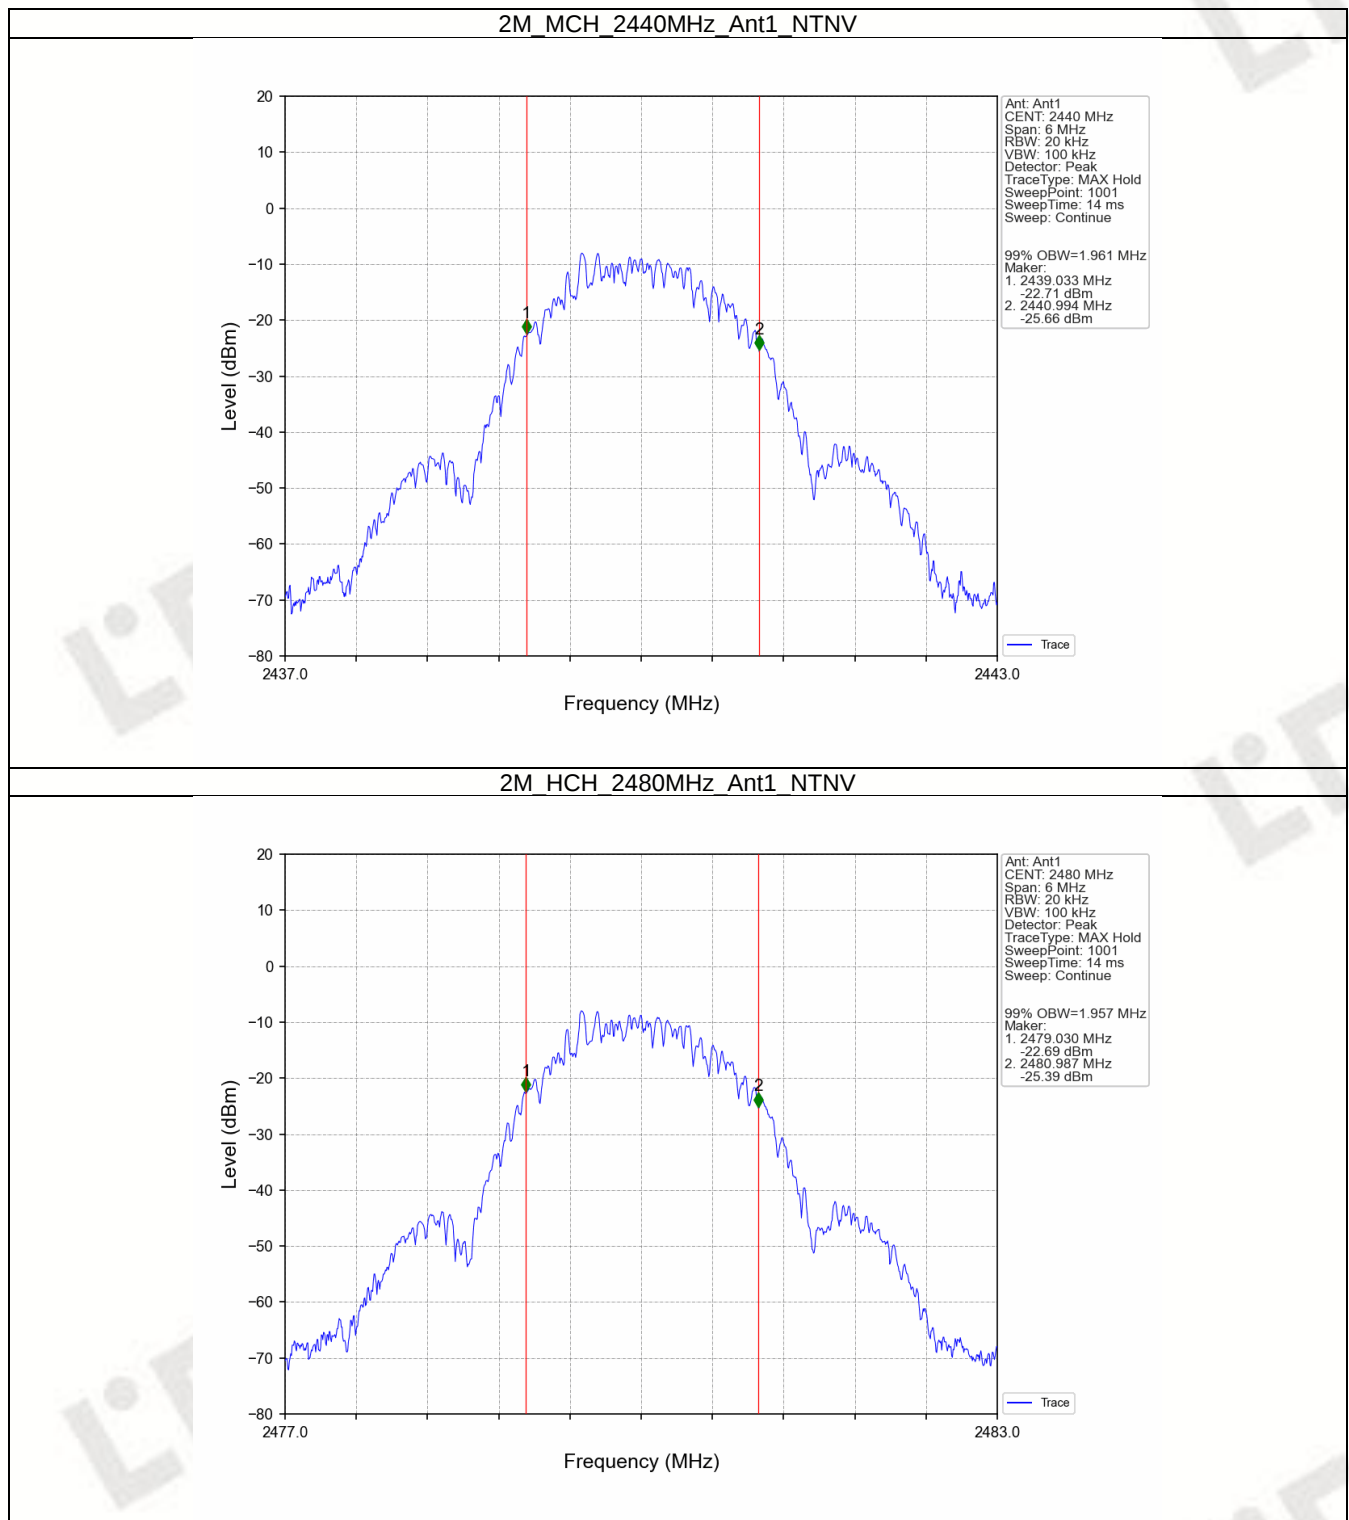


FCC ID: 2ADH6-1901200


2.2.2 6dB BW

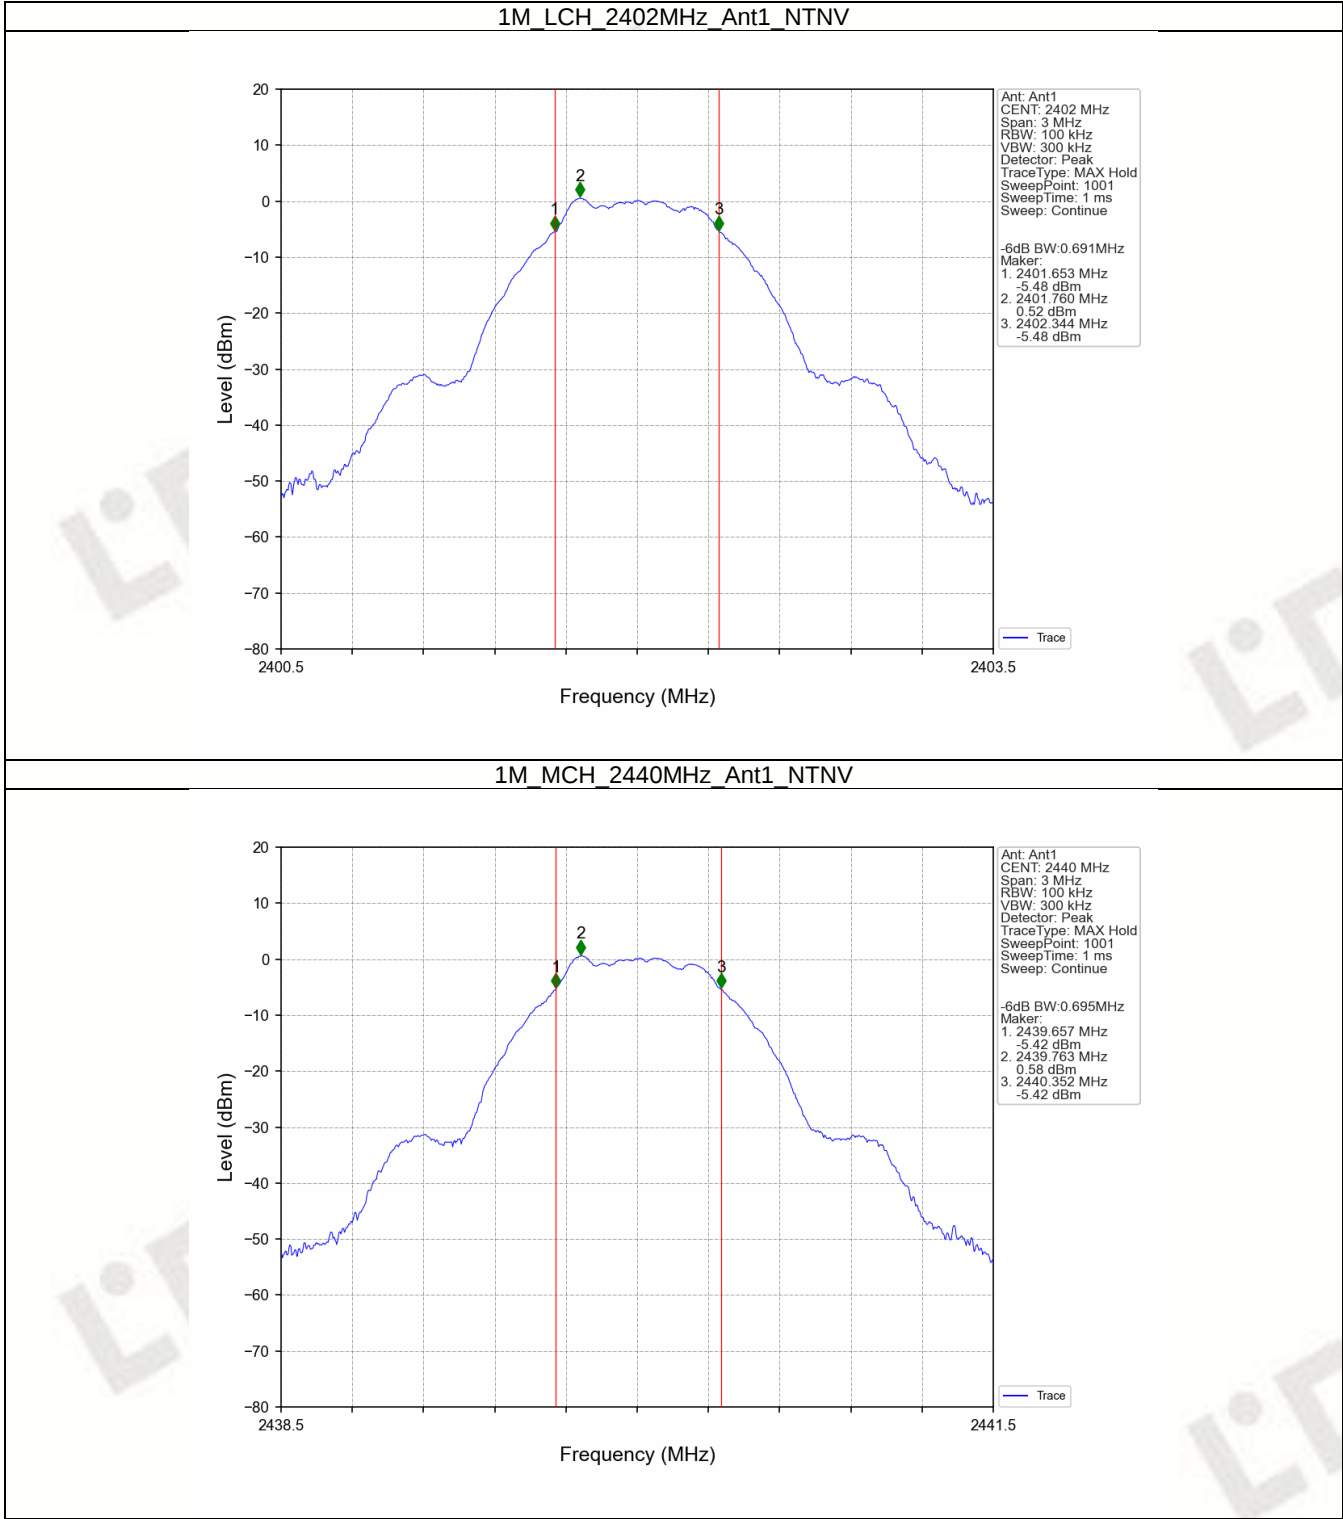

FCC ID: 2ADH6-1901200

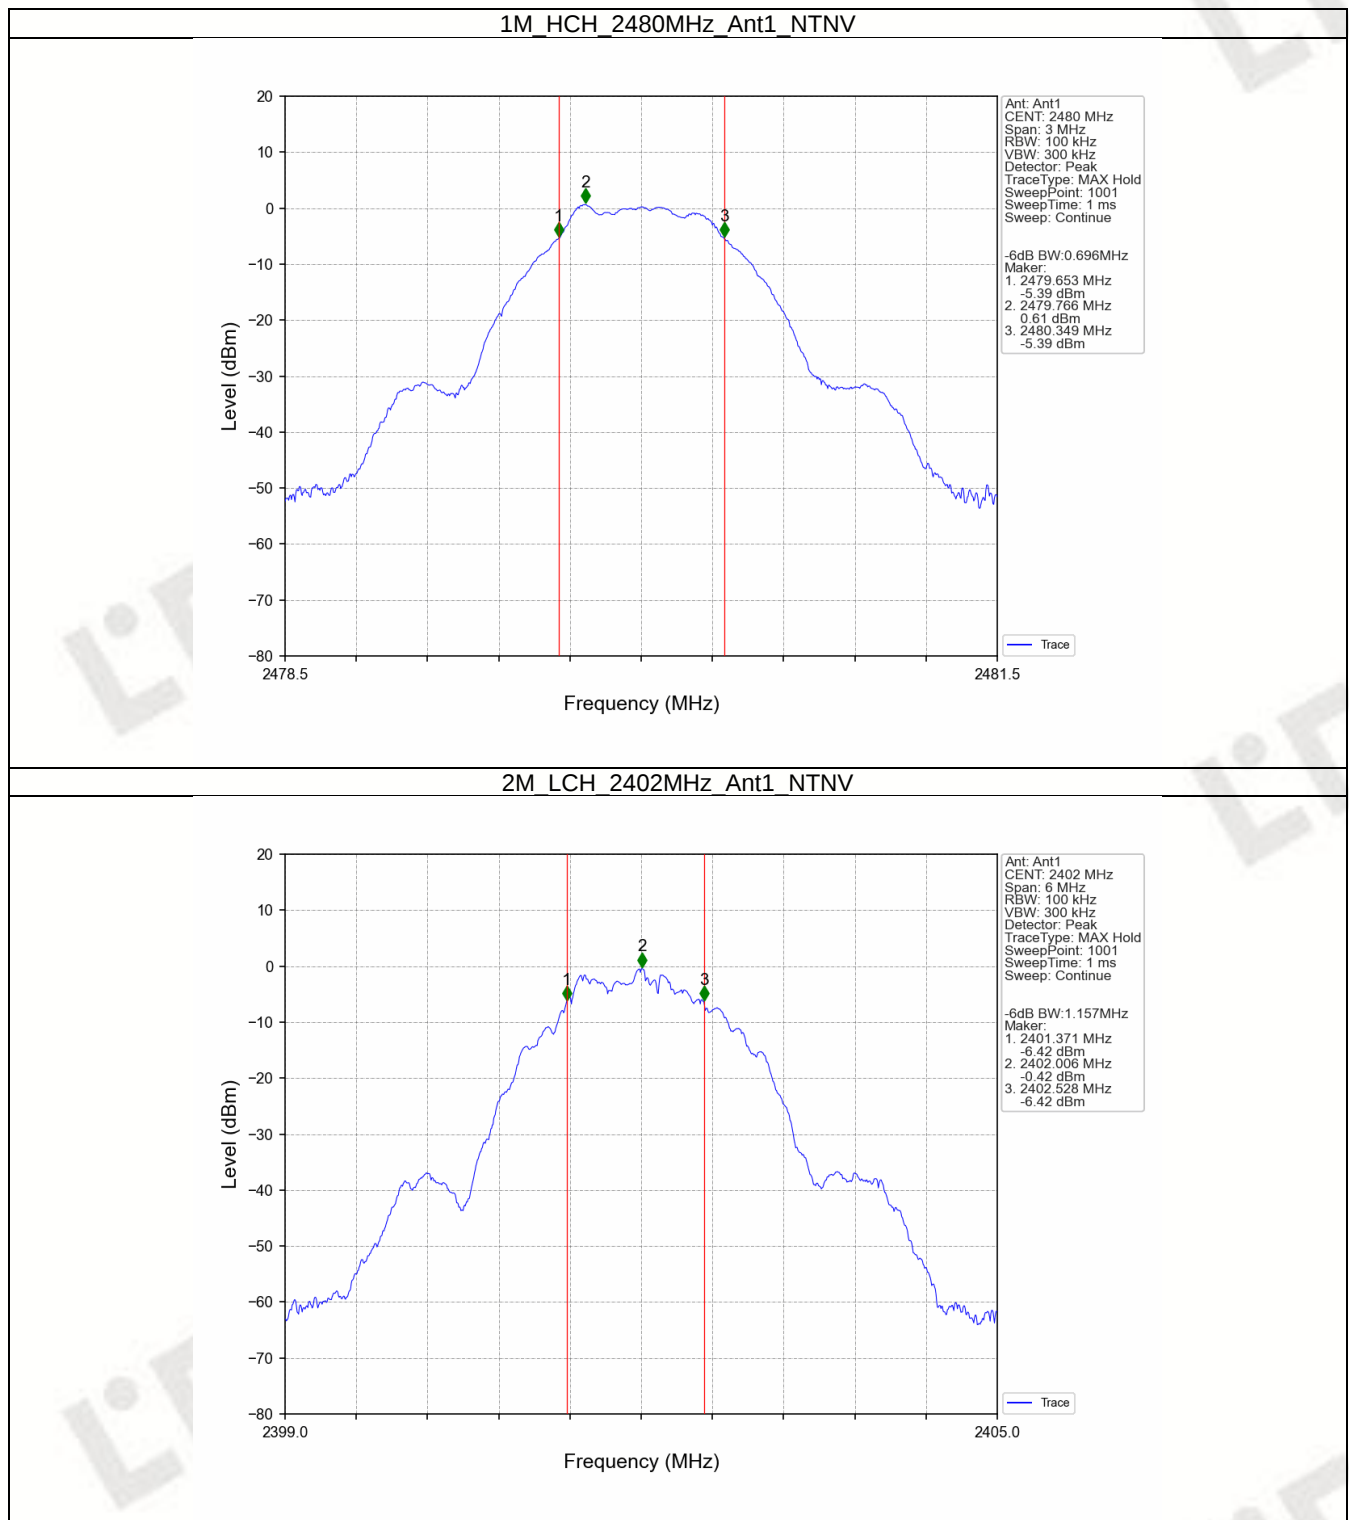

FCC ID: 2ADH6-1901200

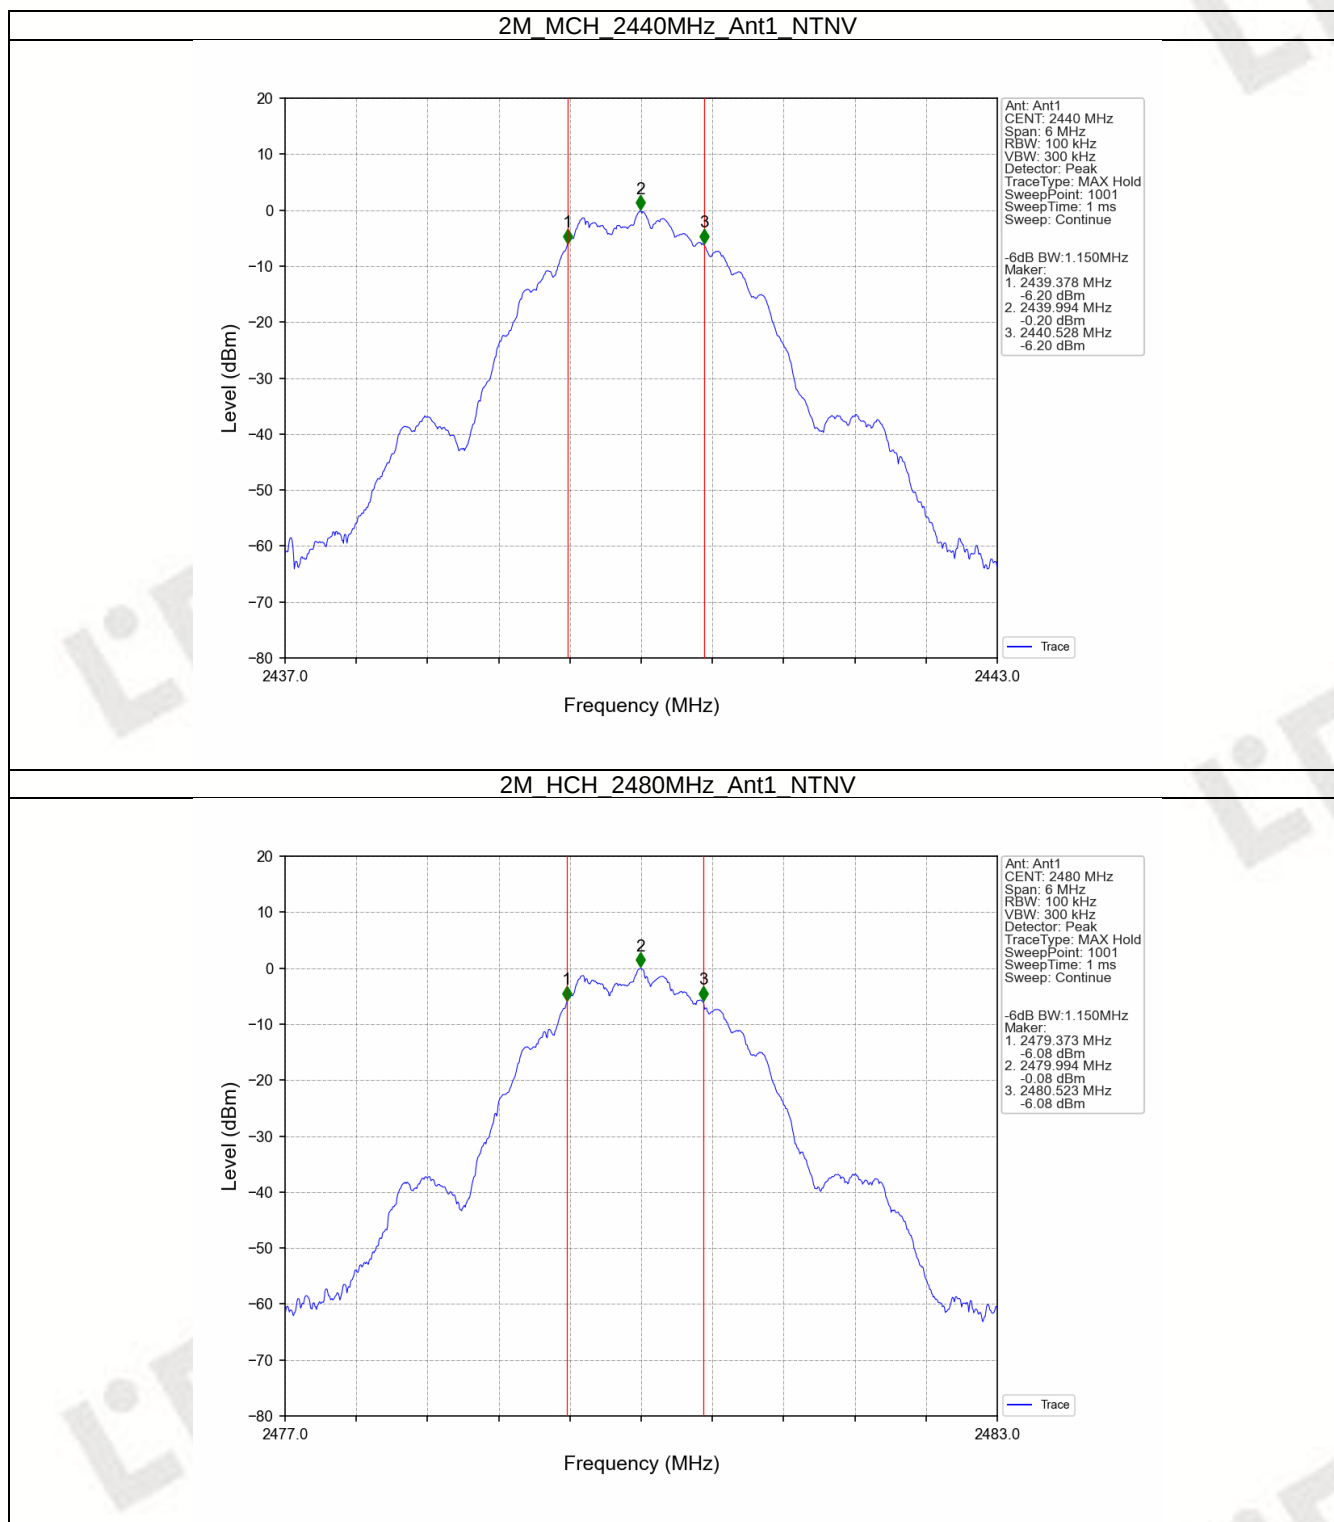

3. Maximum Conducted Output Power

3.1 Test Result

3.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	1.57	<=30	Pass
		2440	1.64	<=30	Pass
		2480	1.68	<=30	Pass
2M	SISO	2402	1.48	<=30	Pass
		2440	1.57	<=30	Pass
		2480	1.62	<=30	Pass
Note1: Antenna Gain: Ant1: 2.07dBi; Note2: The test results include RF Cable loss.					

FCC ID: 2ADH6-1901200

4. Maximum Power Spectral Density

4.1 Test Result

4.1.1 PSD

Mode	TX Type	Frequency (MHz)	Maximum PSD		Verdict
			ANT1 dBm/100kHz	Limit dBm/3kHz	
1M	SISO	2402	0.46	<=8	Pass
		2440	0.57	<=8	Pass
		2480	0.59	<=8	Pass
2M	SISO	2402	-0.39	<=8	Pass
		2440	-0.22	<=8	Pass
		2480	-0.14	<=8	Pass


Note1: Antenna Gain: Ant1: 2.07dBi;

Note2: The test results include RF Cable loss.


FCC ID: 2ADH6-1901200

4.2 Test Graph


4.2.1 PSD

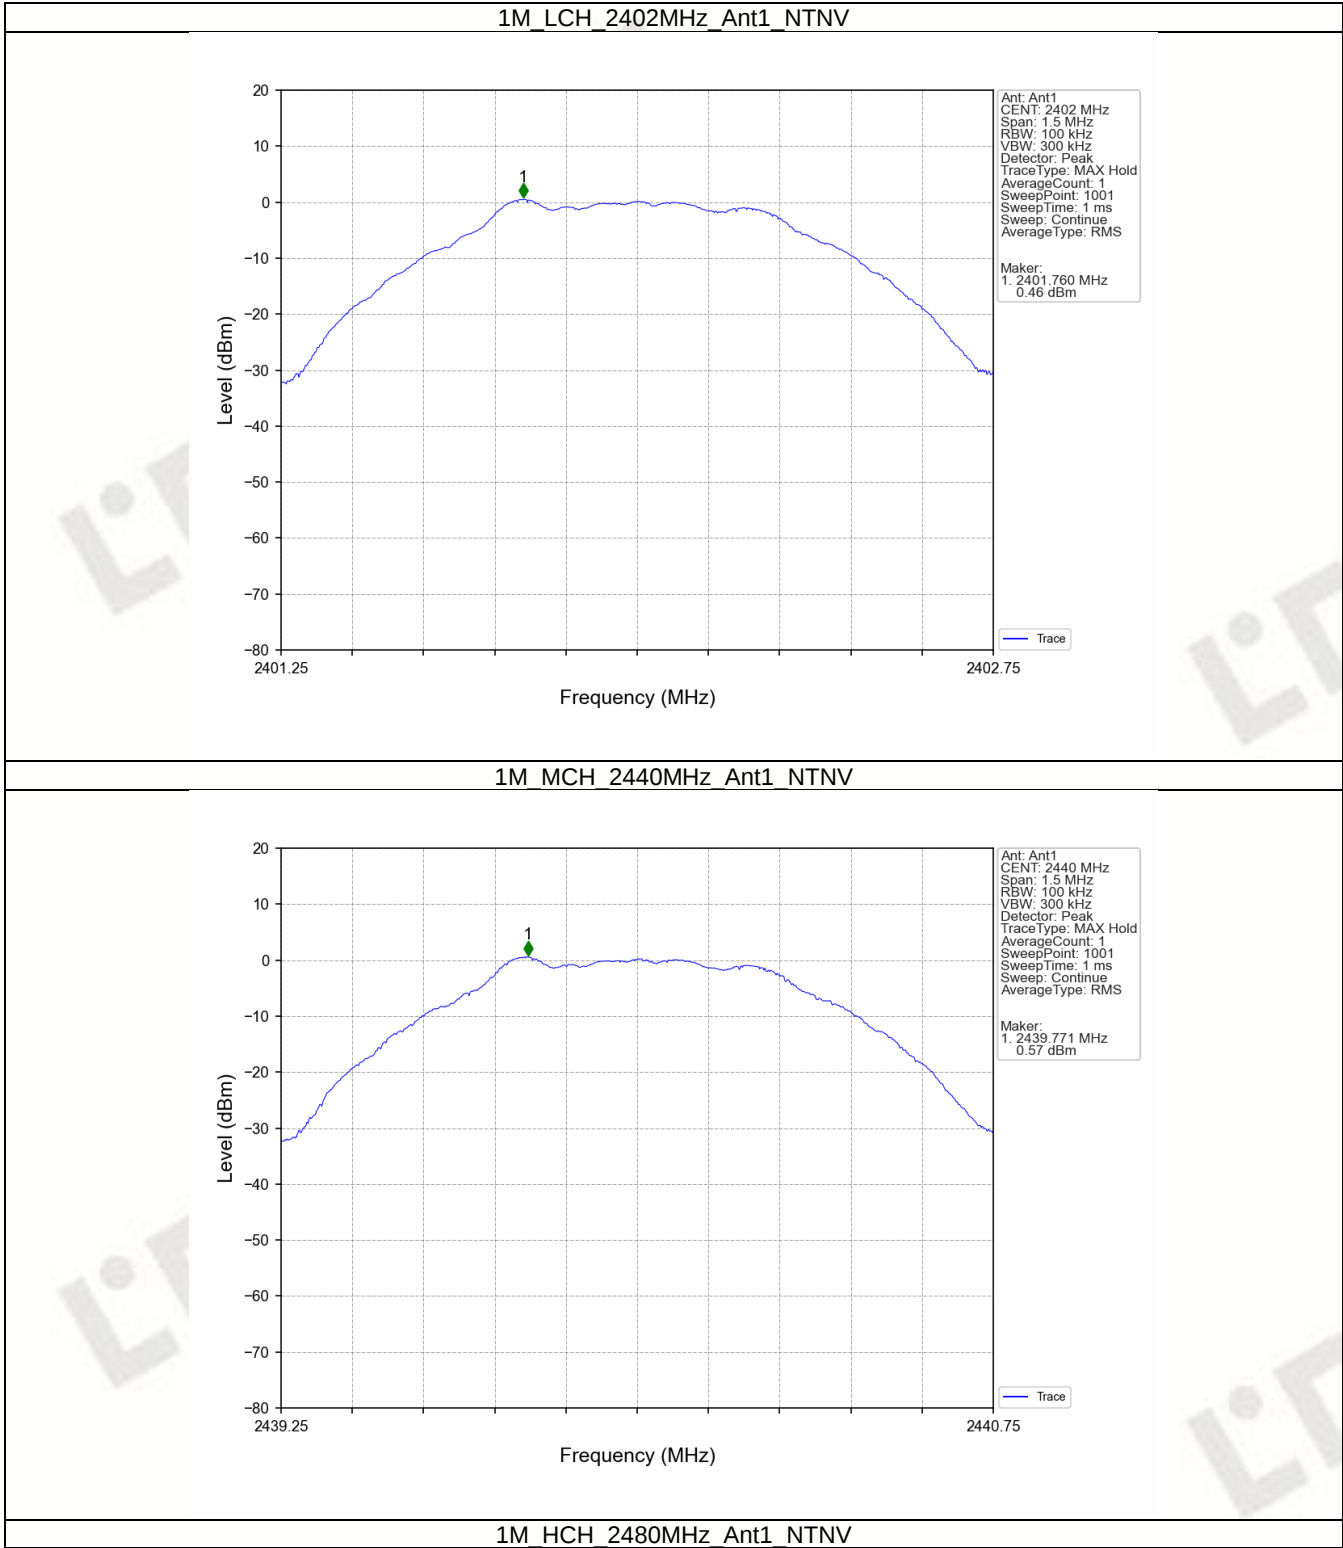


FCC ID: 2ADH6-1901200

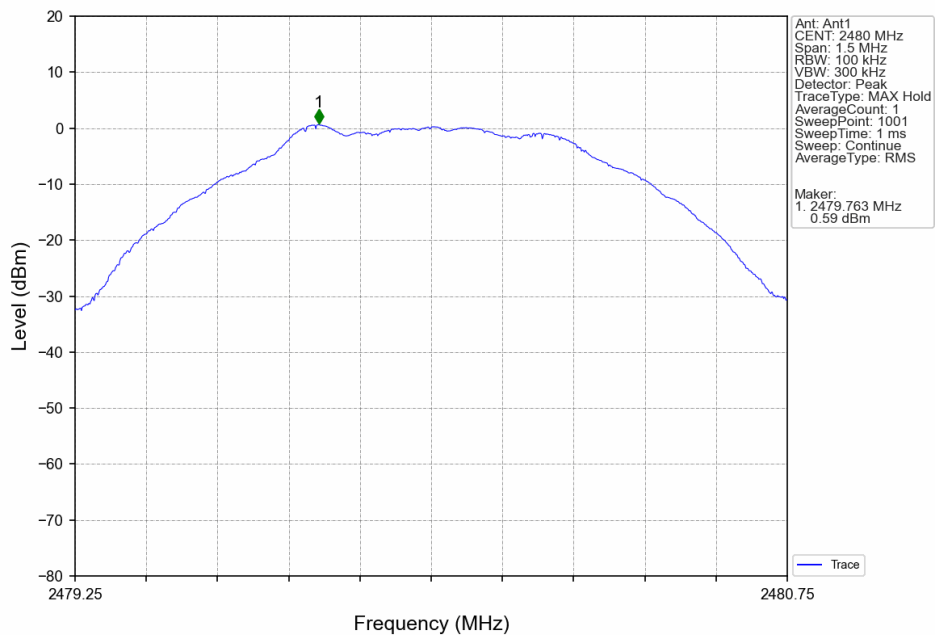

2M_LCH_2402MHz_Ant1_NTNV

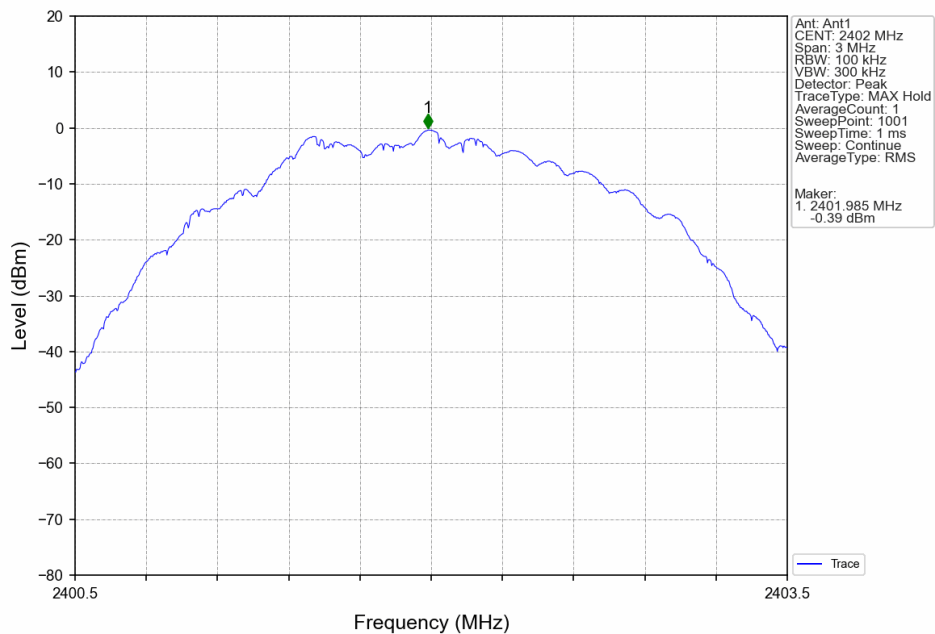

FCC ID: 2ADH6-1901200

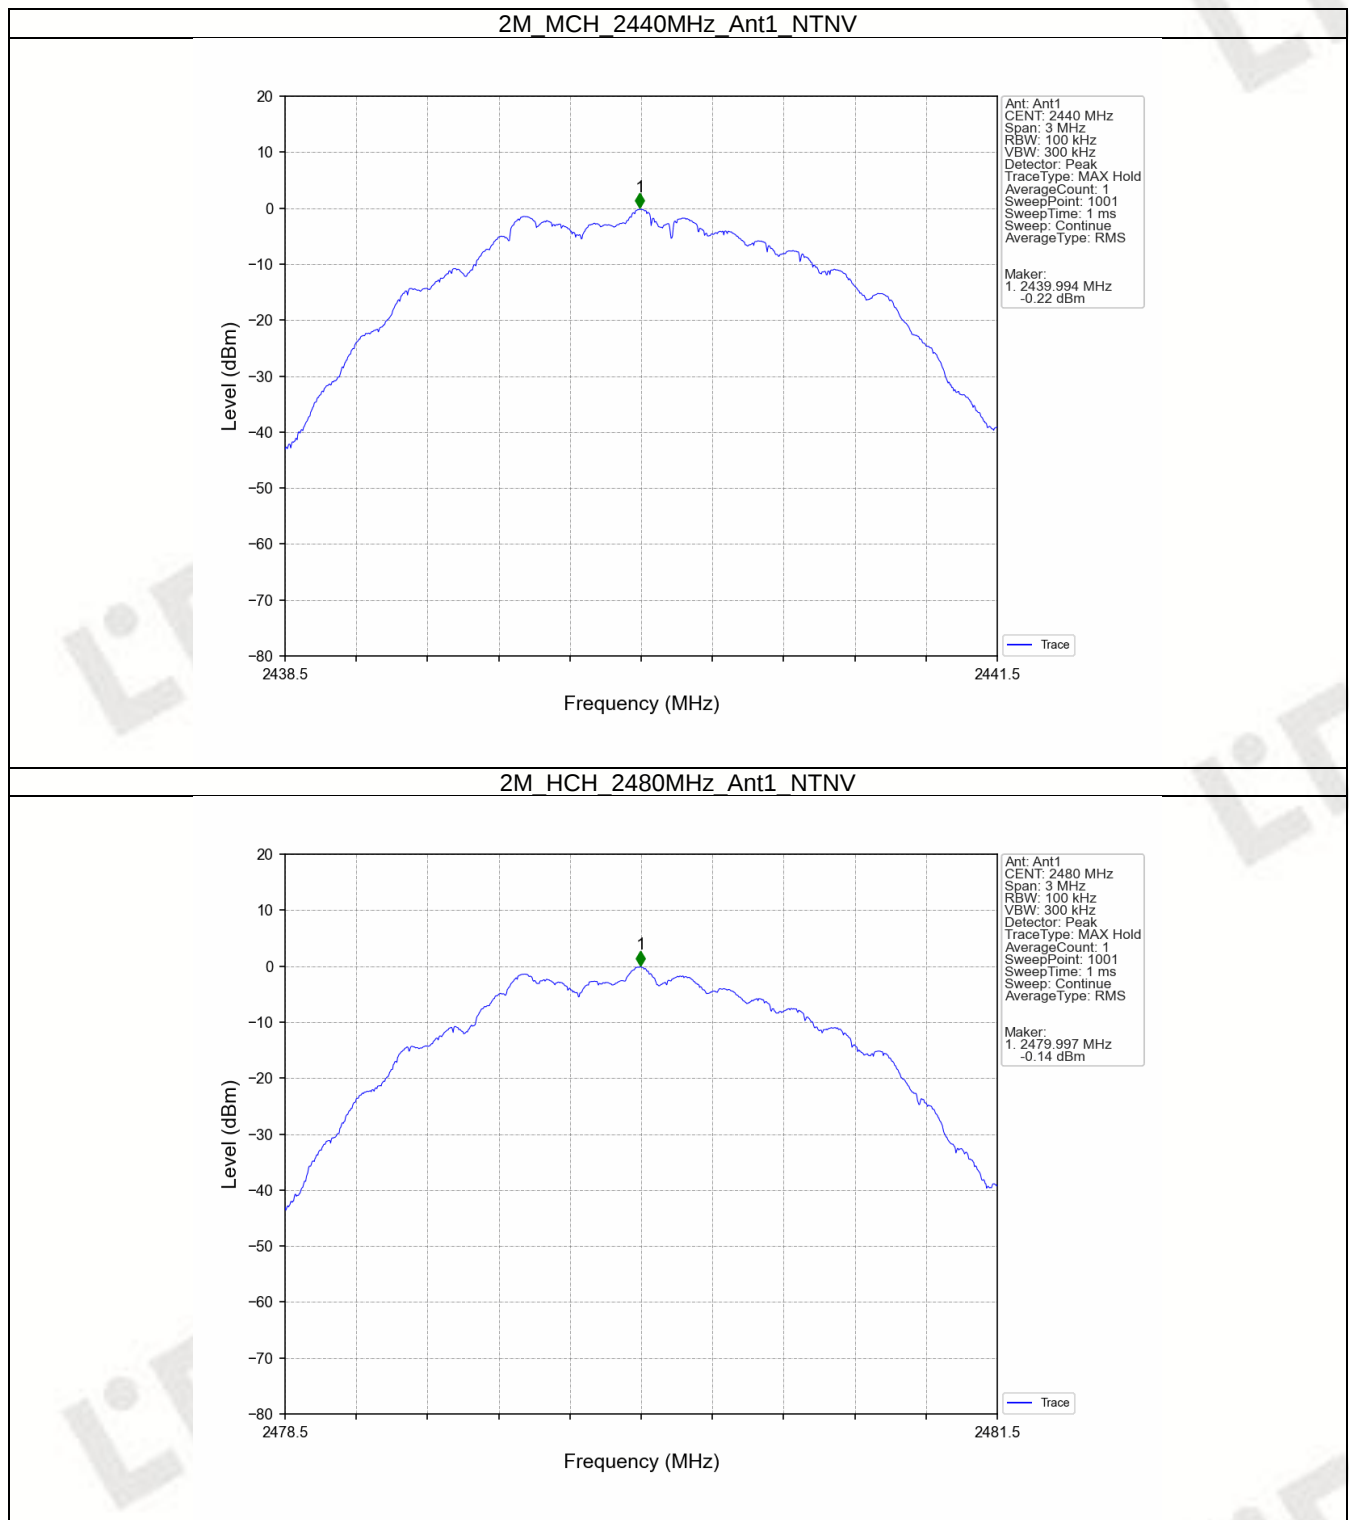

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	0.48
		2440	1	0.56
		2480	1	0.57
2M	SISO	2402	1	-0.37
		2440	1	-0.25
		2480	1	-0.14


5.1.2 CSE

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	0.57	-19.43	Pass
		2440	1	0.57	-19.43	Pass
		2480	1	0.57	-19.43	Pass
2M	SISO	2402	1	-0.14	-20.14	Pass
		2440	1	-0.14	-20.14	Pass
		2480	1	-0.14	-20.14	Pass


FCC ID: 2ADH6-1901200

5.2 Test Graph


5.2.1 Ref

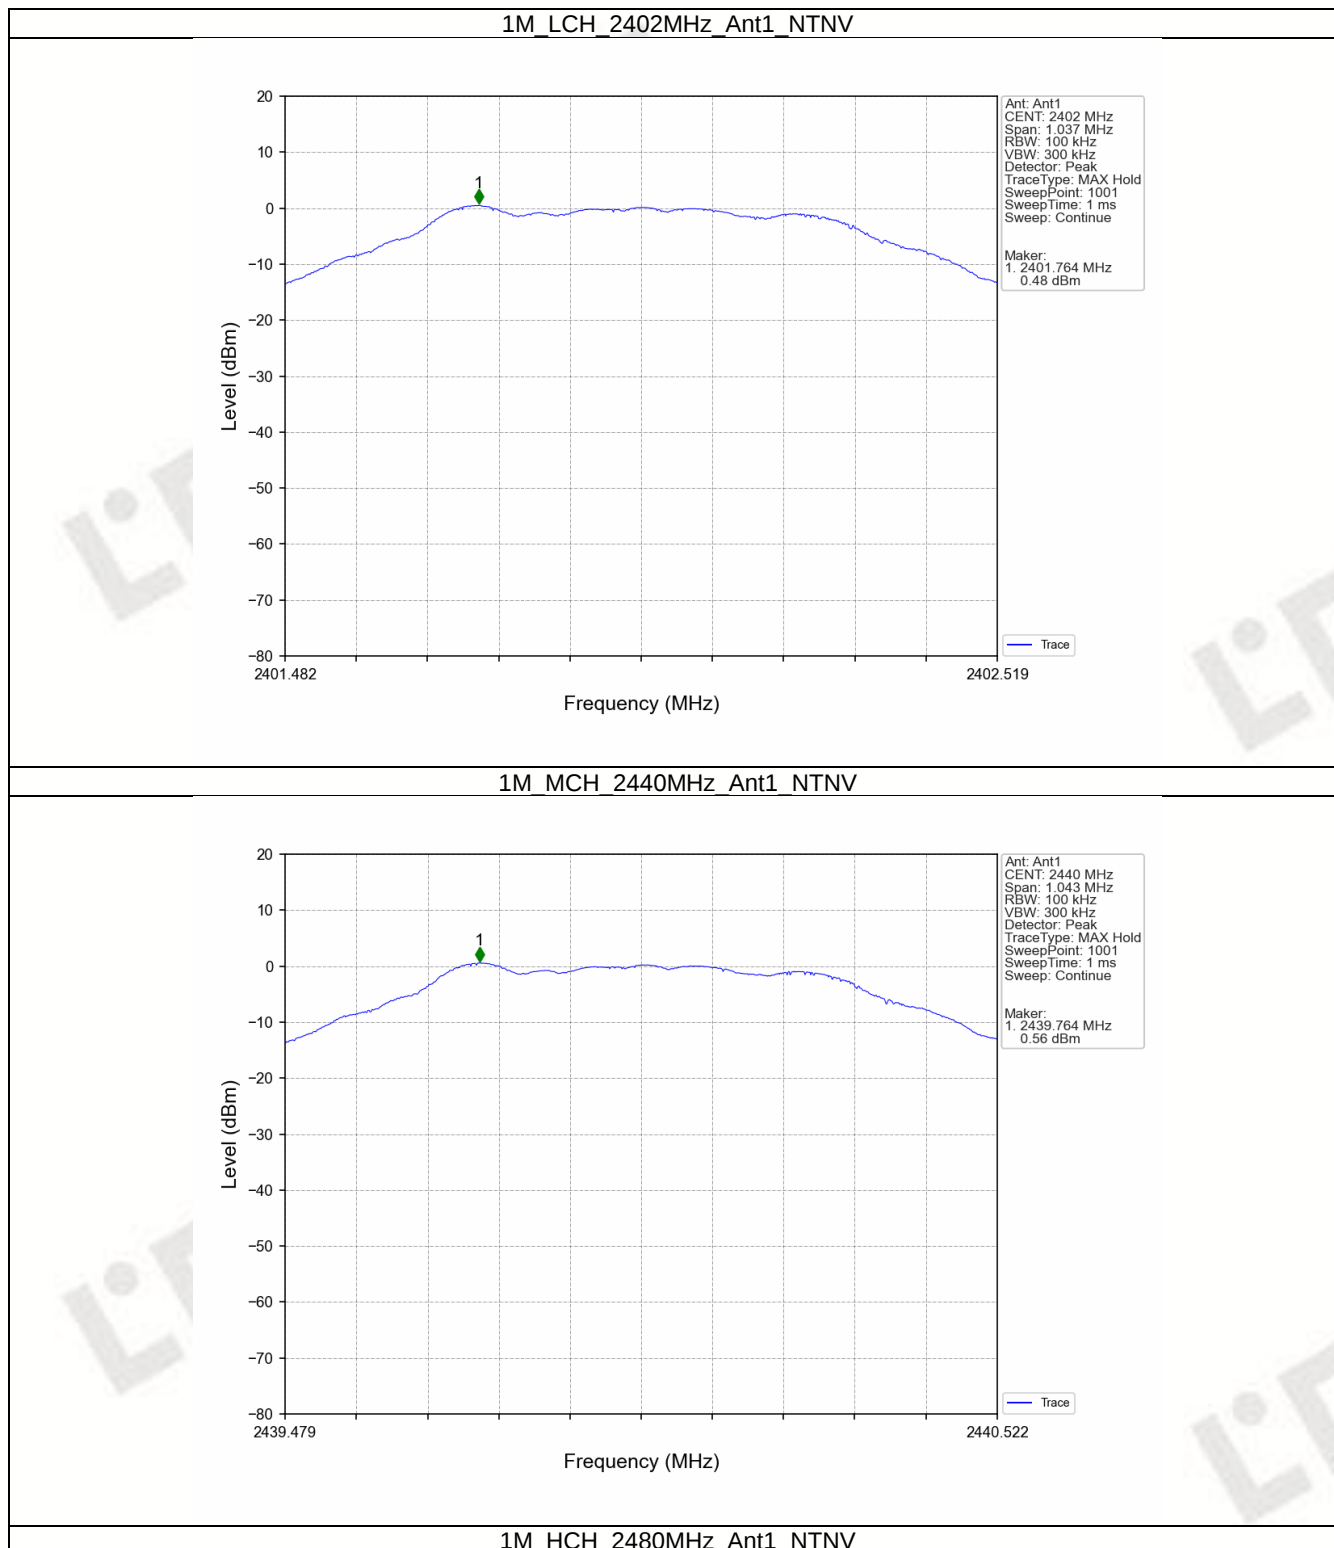


FCC ID: 2ADH6-1901200

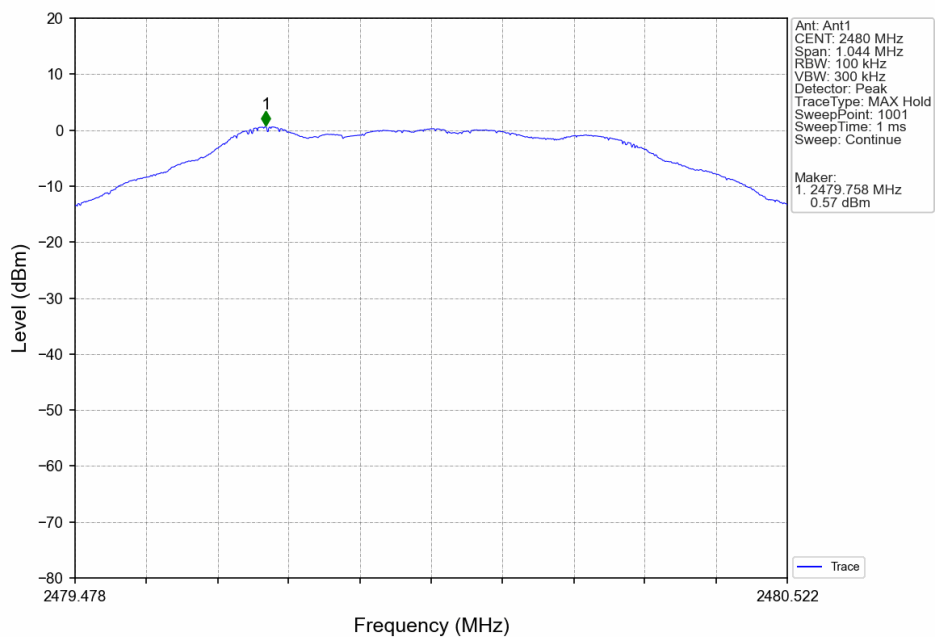

2M_LCH_2402MHz_Ant1_NTNV

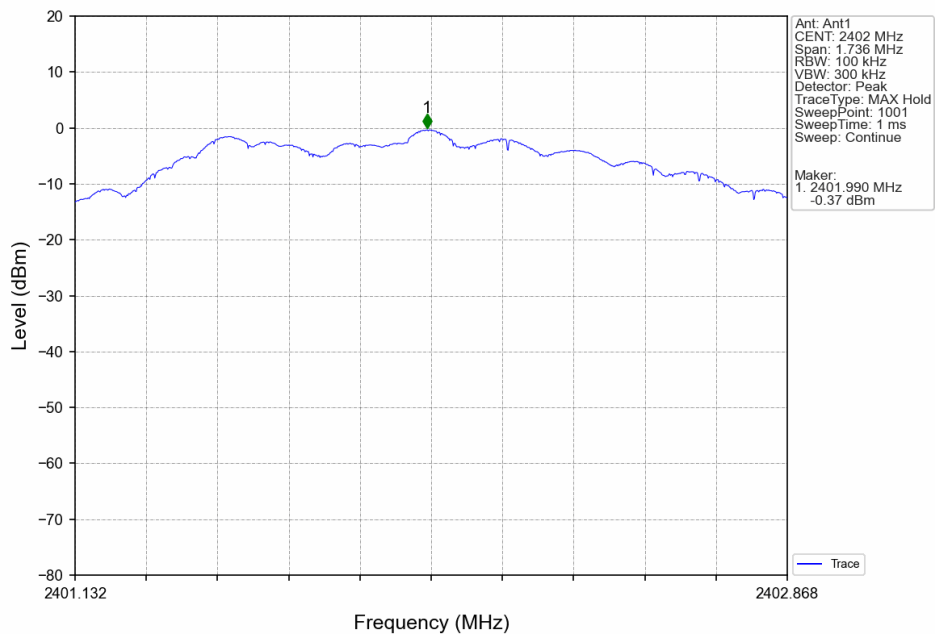


FCC ID: 2ADH6-1901200

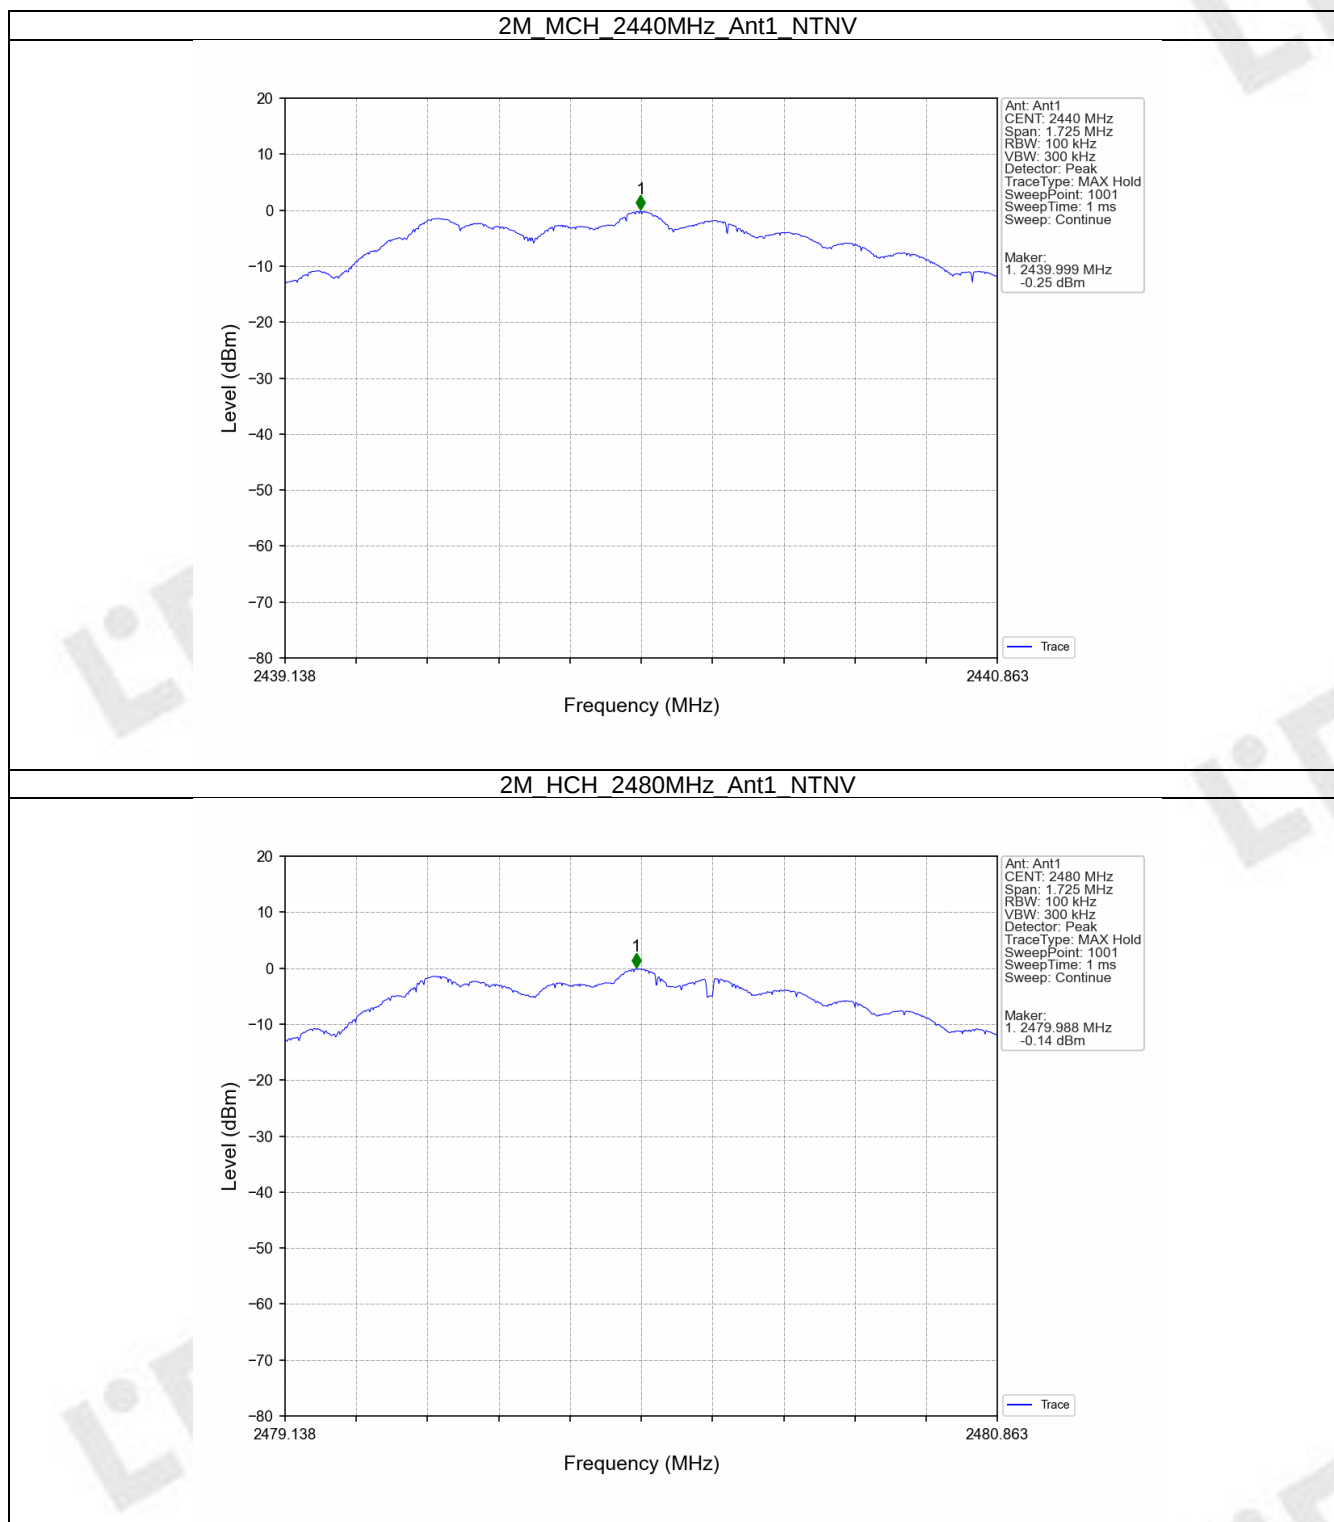


FCC ID: 2ADH6-1901200


5.2.2 CSE

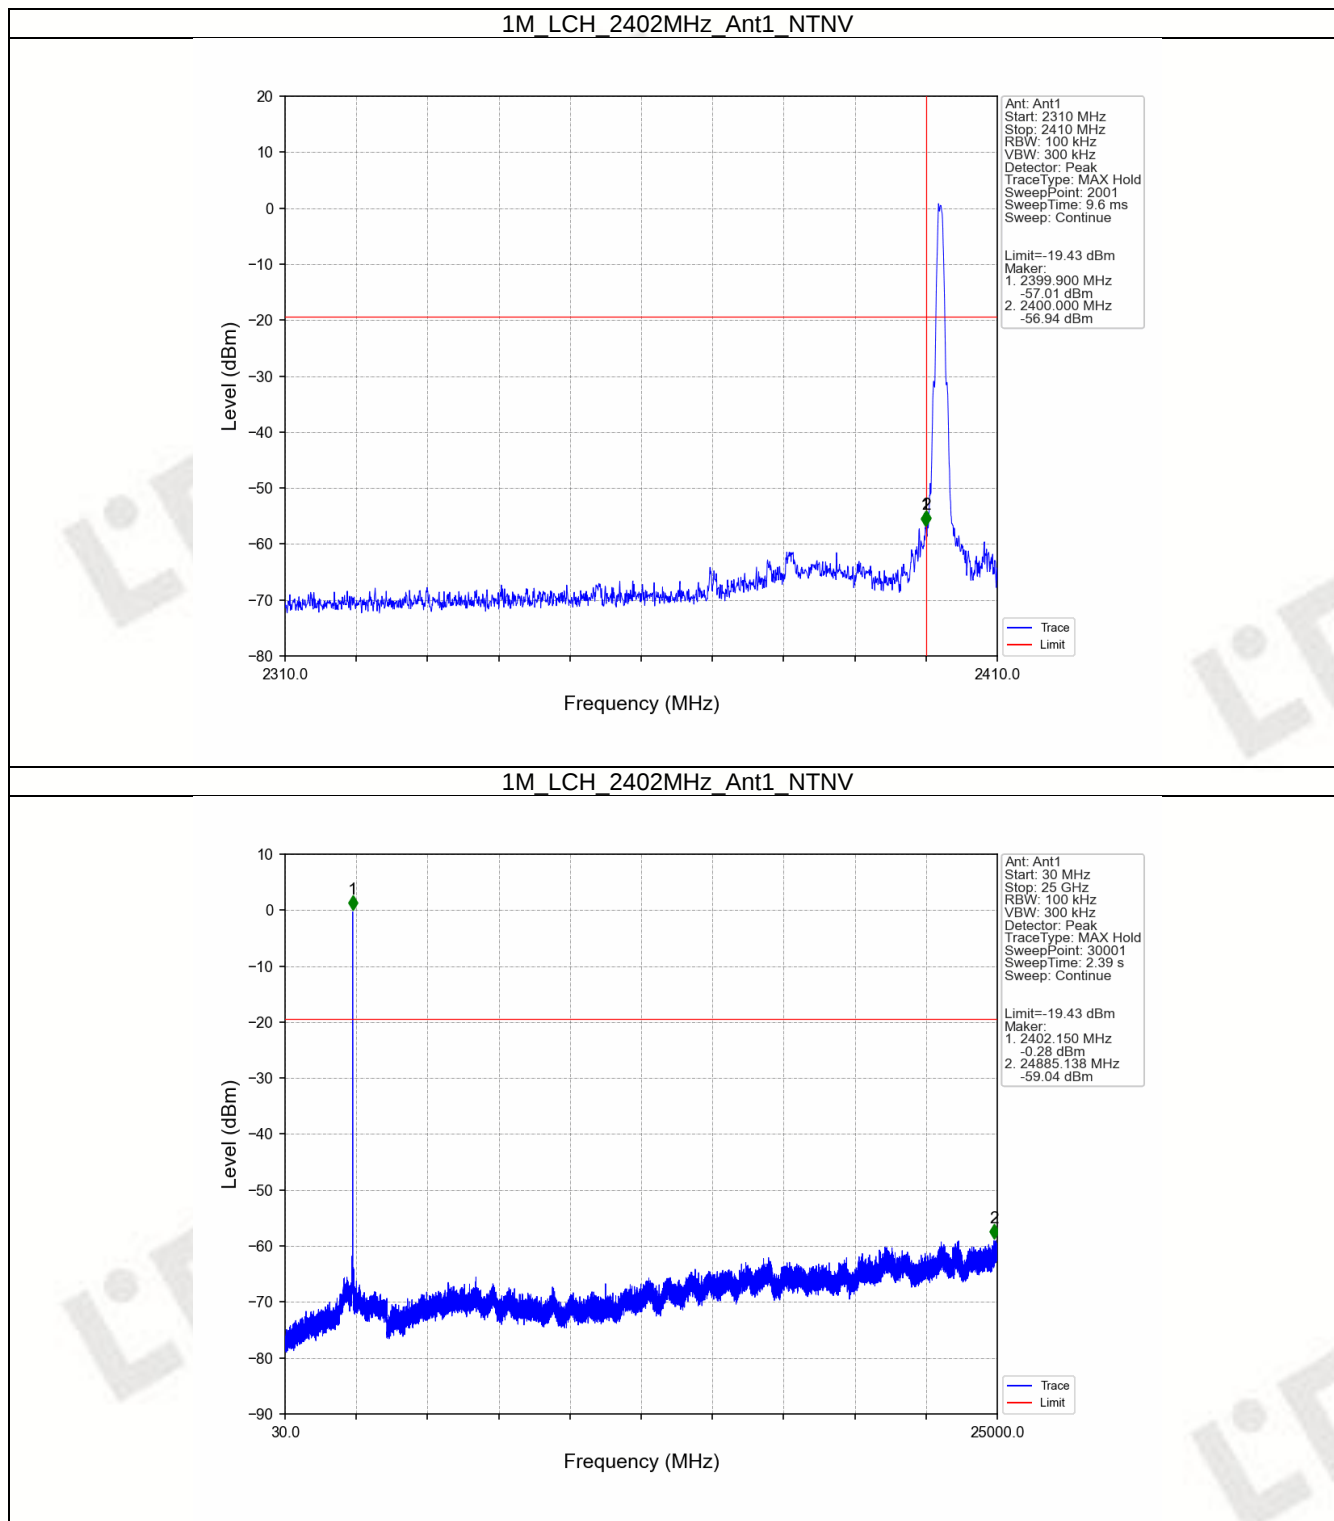


FCC ID: 2ADH6-1901200

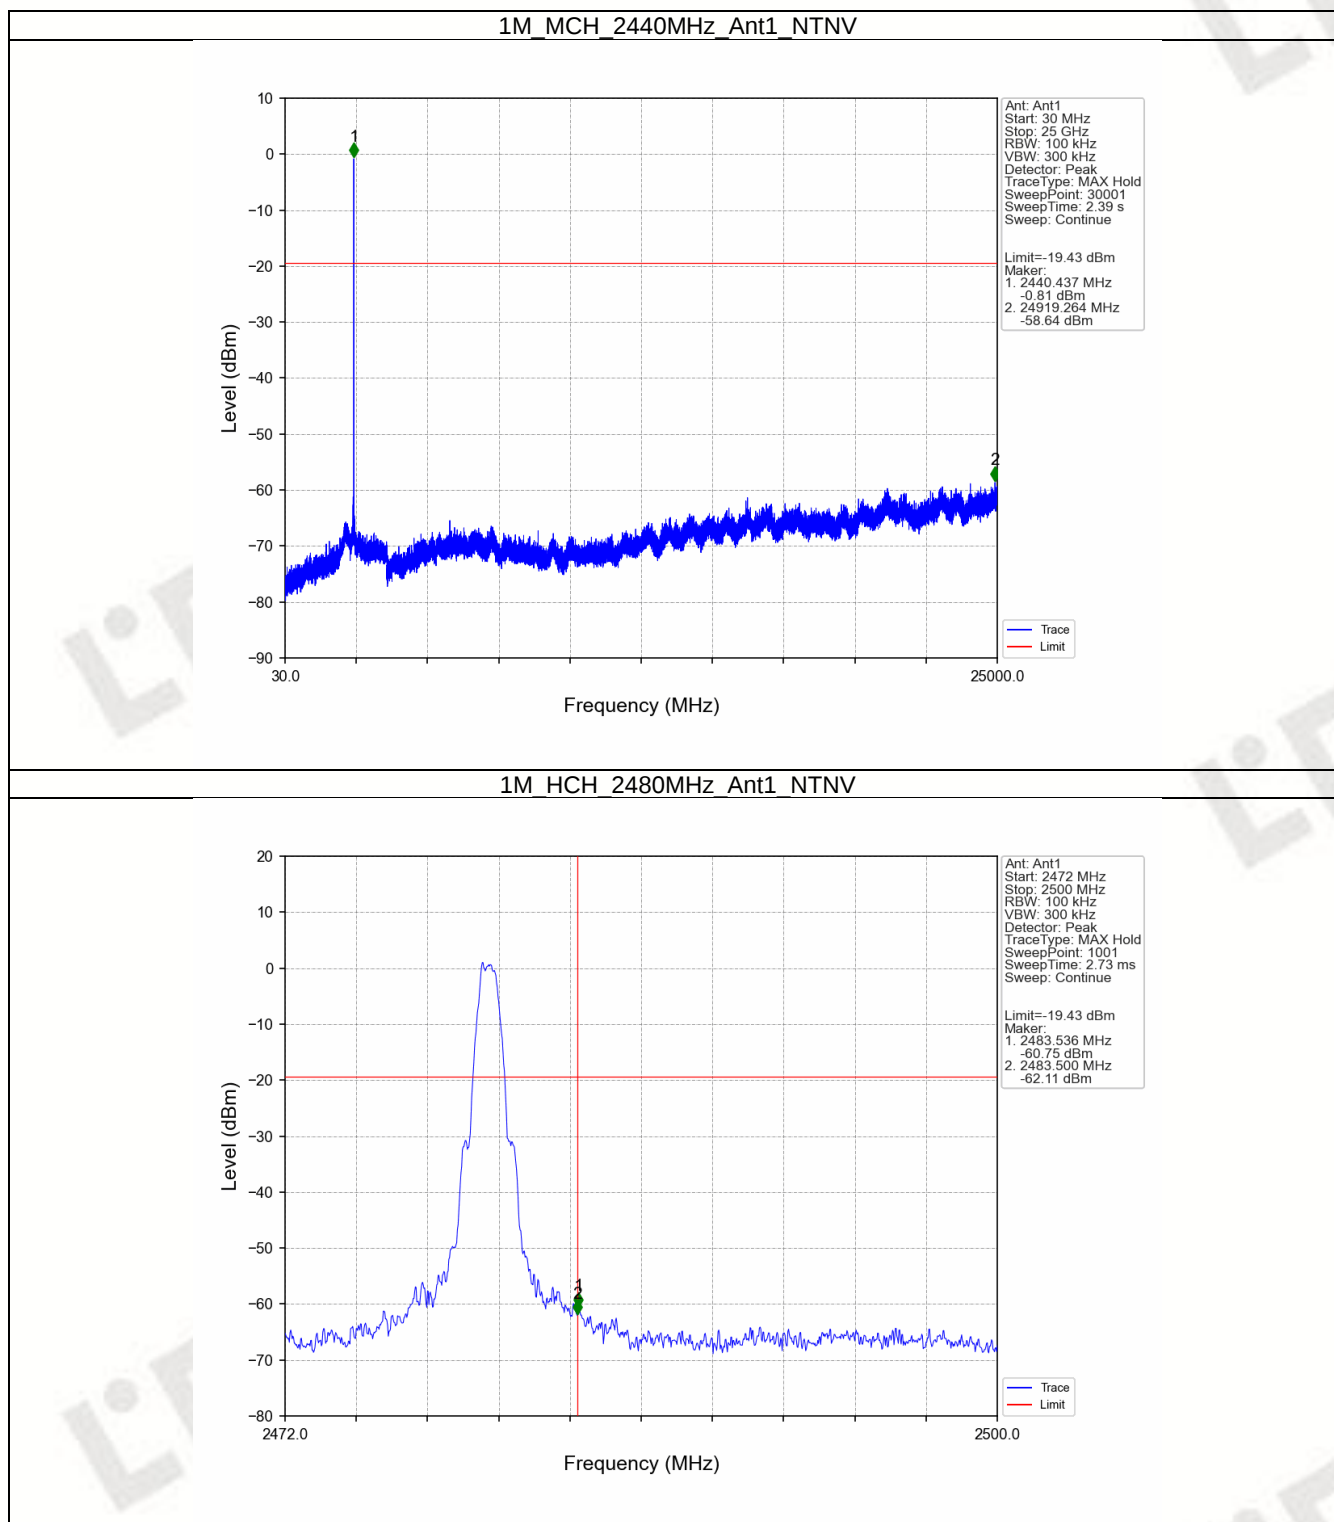

FCC ID: 2ADH6-1901200

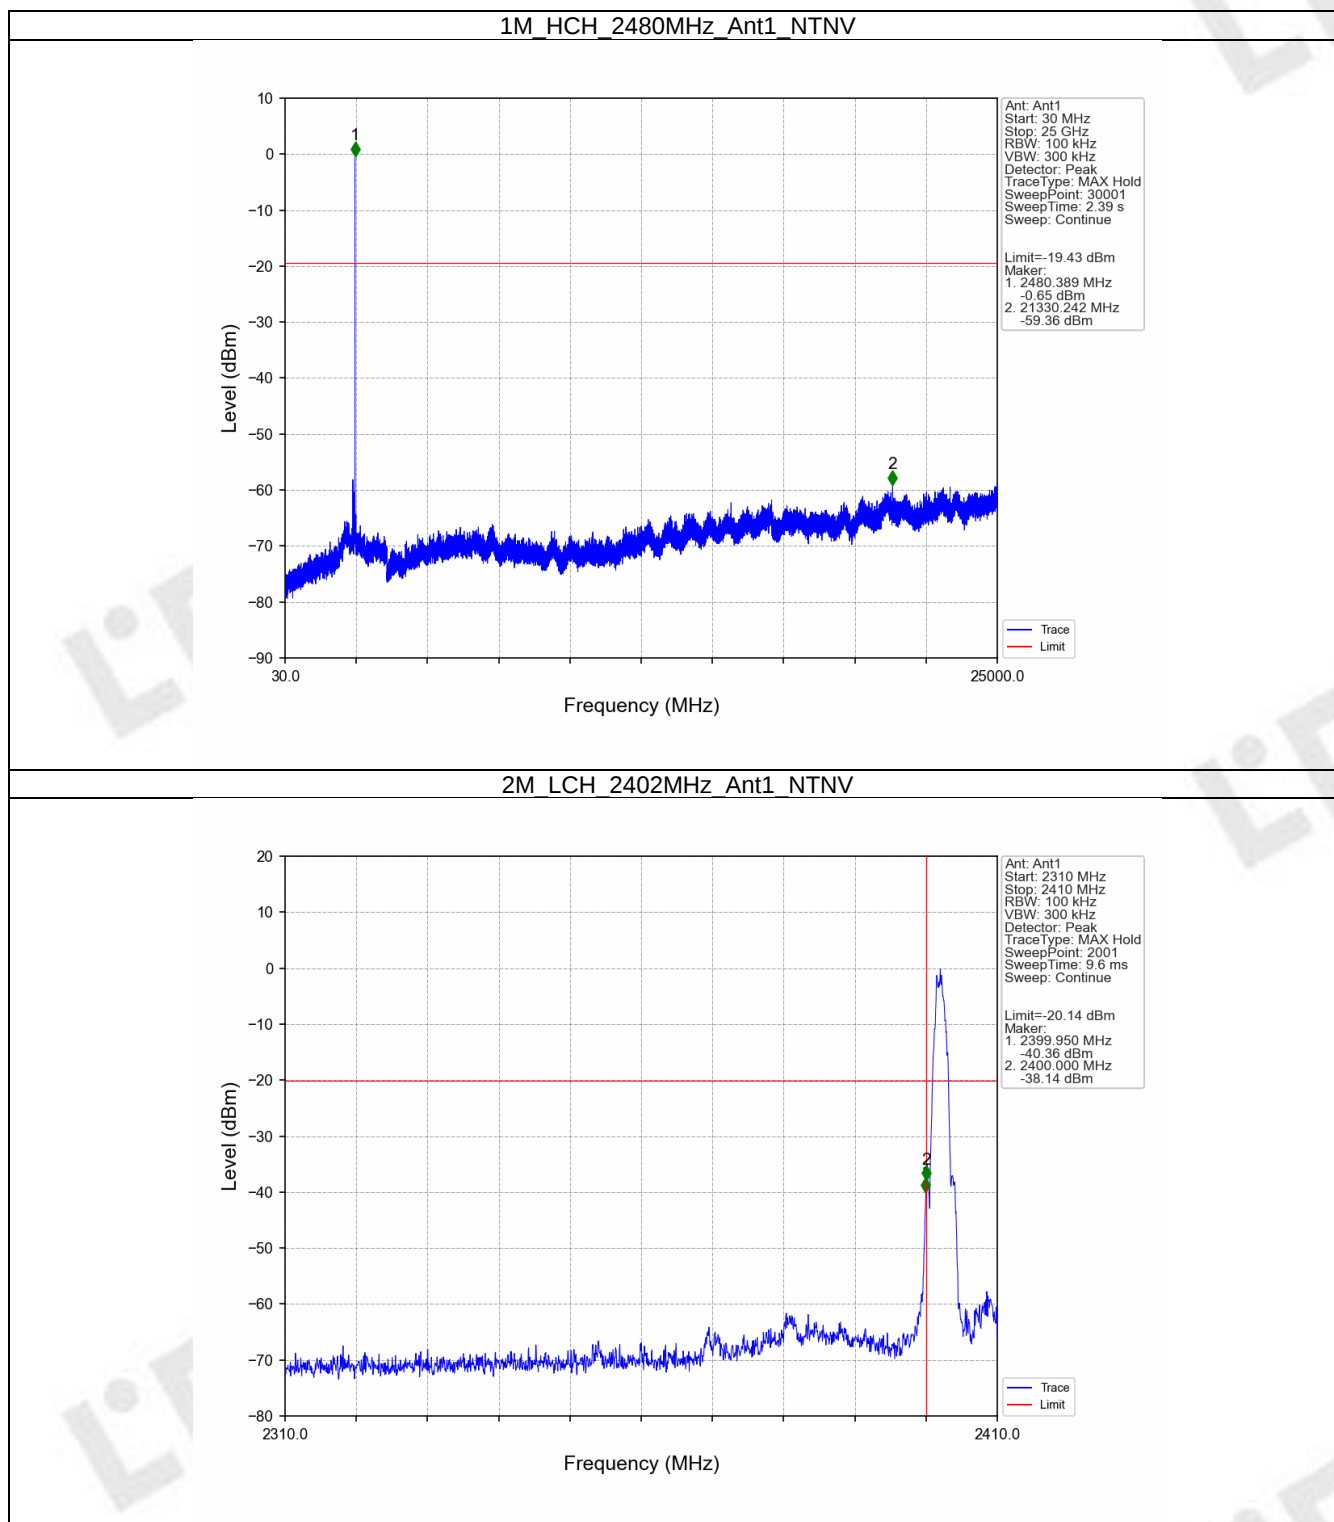

FCC ID: 2ADH6-1901200

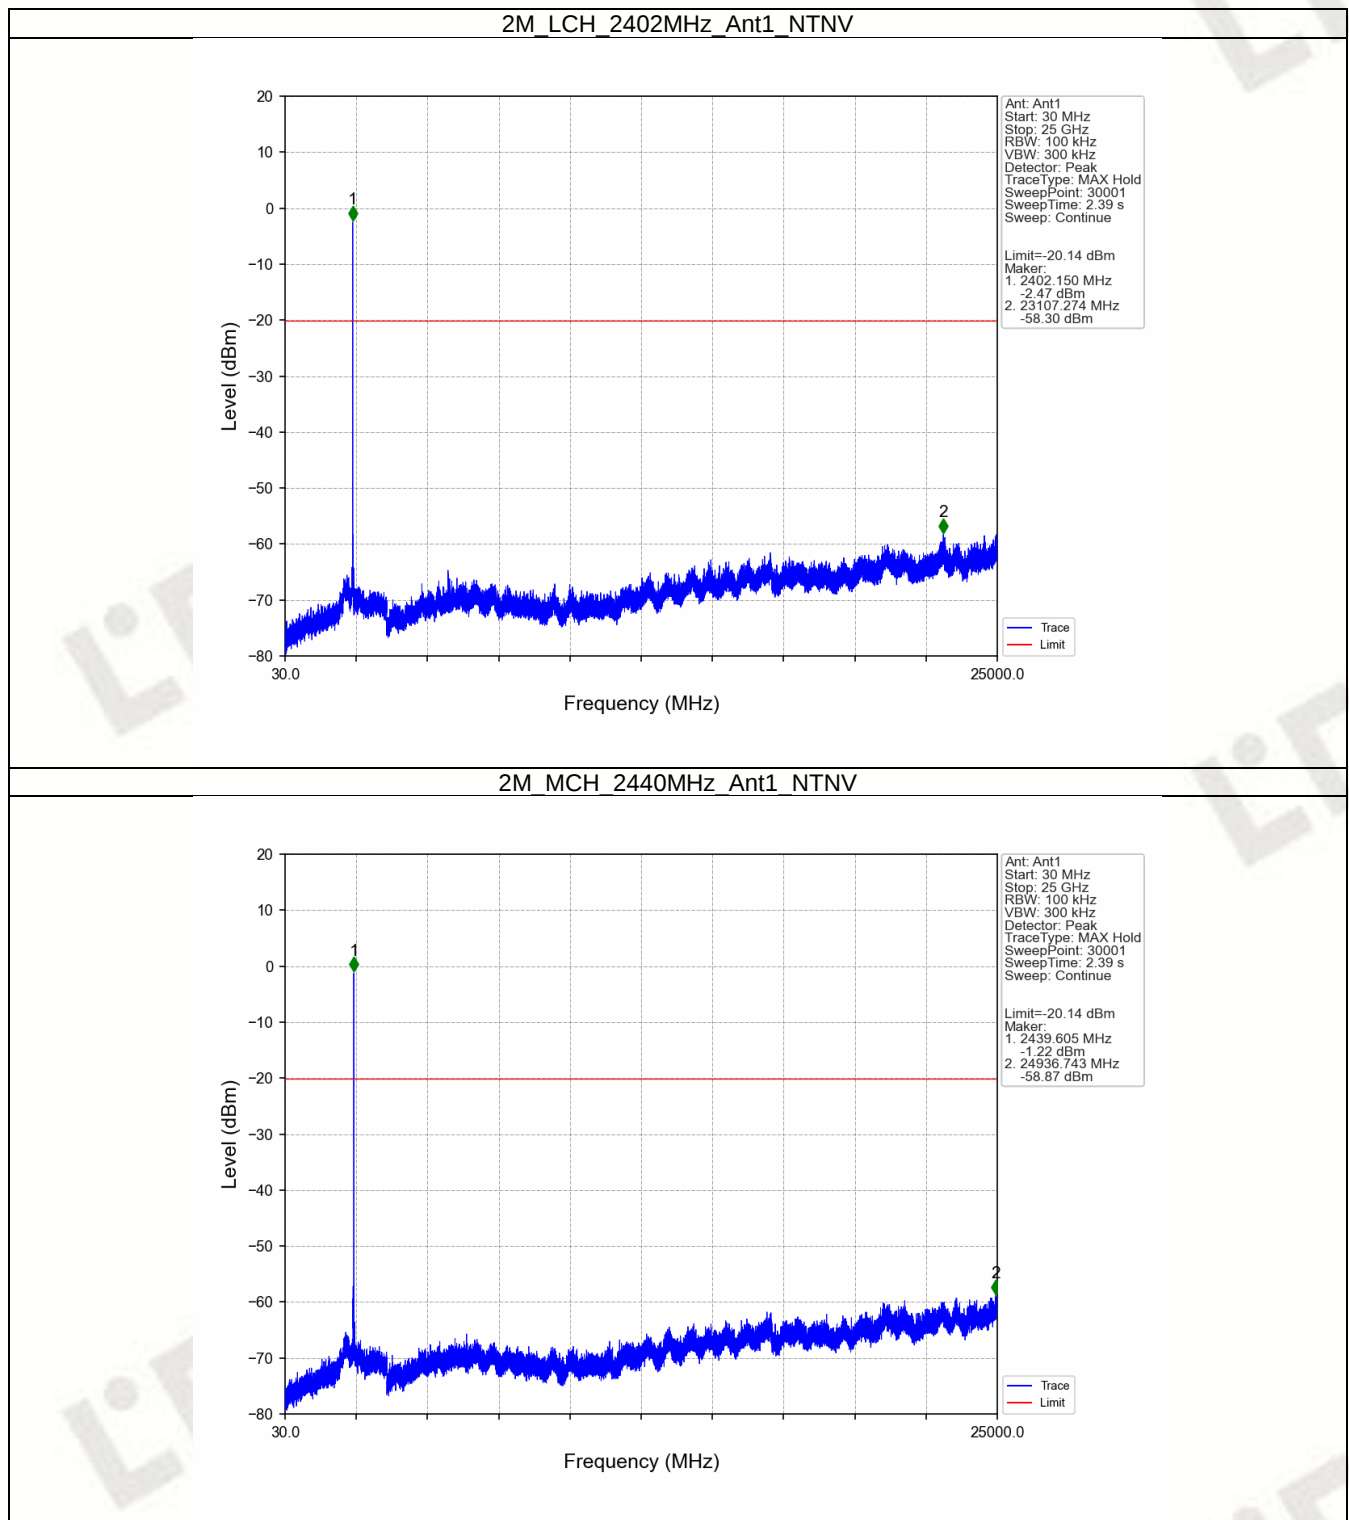

FCC ID: 2ADH6-1901200

