



TEST REPORT

For LTE Cat M

Report No..... : CHTW25100018A1

Project No : SHT2512111506W

FCC ID : 2A3JW-EM25

Applicant's name : Eitan Medical Ltd.

Address..... : 29 Yad Haruzim St. P.O. Box 8639 Netanya 4250529, Israel

Product Name : Sapphire Connect

Trade Mark..... : Eitan Medical

Model No..... : 15044-000-1029

Listed Model(s) : -

Standard : **FCC CFR Title 47 Part 2**
FCC CFR Title 47 Part 22 Subpart H
FCC CFR Title 47 Part 24 Subpart E
FCC CFR Title 47 Part 27

Date of receipt of test sample..... : 2025/6/20

Date of testing..... : 2025/7/9- 2025/8/26

Date of issue..... : 2026/1/7

Result..... : **PASS**



Compiled by
(Position+Printed name+Signature) : File administrator Caspar Chen 

Supervised by
(Position+Printed name+Signature) : Project Engineer Xiaodong Zhao 

Approved by
(Position+Printed name+Signature) : RF Manager Xu Yang 

Testing Laboratory Name : **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address..... : Building 7, Baiwang Idea Factory, No.1051, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong, China

Test Report Form No. : R0066

Test Report Form(s) Originator : Shenzhen Huatongwei International Inspection Co., Ltd.

Master TRF : Dated 2025-07

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. The test report merely correspond to the test sample. The authenticity of this Test Report and its contents can be verified by contacting the Laboratory, responsible for this Test Report.

Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	<u>3</u>
1.1.	Applicable Standards	3
1.2.	Report version information	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>6</u>
3.1.	Client Information	6
3.2.	Product Description	6
3.3.	Radio Specification Description	6
3.4.	Testing Laboratory Information	7
<u>4.</u>	<u>TEST CONFIGURATION</u>	<u>8</u>
4.1.	Test frequency list	8
4.2.	Test mode	9
4.3.	Test sample information	9
4.4.	Setup Diagram for Tests	9
4.5.	Support unit used in test configuration and system	10
4.6.	Testing environmental condition	10
4.7.	Statement of the measurement uncertainty	10
4.8.	Equipments Used during the Test	11
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>12</u>
5.1.	ERP and EIRP	12
5.2.	Radiated Spurious Emission	15
<u>6.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>25</u>
<u>7.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>25</u>

1. TEST STANDARDS AND REPORT VERSION

1.1. Applicable Standards

The tests were performed according to following standards:

[FCC CFR Title 47 Part 2](#): Frequency Allocations and Radio Treaty Matters; General Rules and Regulations

[FCC CFR Title 47 Part 22 Subpart H](#): Cellular Radiotelephone Service

[FCC CFR Title 47 Part 24 Subpart E](#): Broadband PCS

[FCC CFR Title 47 Part 27](#): Miscellaneous Wireless Communications Services

[ANSI C63.26-2015](#): American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[KDB 971168 D01 Power Meas License Digital Systems v03](#): MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

1.2. Report version information

Revision No.	Date of issue	Description
N/A	2025-10-11	Original
A1	2026-01-07	1. Add information about the radiation spurious test software. 2. The equipment list is supplemented with signal sources and attenuators. 3. Add the EUT test configuration diagram.

2. TEST DESCRIPTION

Section	Test Item	Section in CFR 47	Result #1	Test Engineer
-	Conducted Output Power	Part 2.1046 Part 22.913(a) Part 24.232(c) Part 27.50	Pass*	-
-	Peak-to-Average Ratio	Part 24.232 Part 27.50	Pass*	-
-	99% Occupied Bandwidth & 26 dB Bandwidth	Part 2.1049 Part 22.917(b) Part 24.238(b) Part 27.53	Pass*	-
-	Band Edge	Part 2.1051 Part 22.917 Part 24.238 Part 27.53	Pass*	-
-	Conducted Spurious Emissions	Part 2.1051 Part 22.917 Part 24.238 Part 27.53	Pass*	-
-	Frequency stability vs temperature	Part 2.1055(a)(1)(b) Part 22.355 Part 24.235 Part 27.54	Pass*	-
-	Frequency stability vs voltage	Part 2.1055(d)(1)(2) Part 22.355 Part 24.235 Part 27.54	Pass*	-
5.1	ERP and EIRP	Part 22.913(a) Part 24.232(b) Part 27.50	Pass	XIANGYU.WEI
5.2	Radiated Spurious Emissions	Part 2.1053 Part 22.917 Part 24.238 Part 27.53	Pass	YIFAN.WANG

Note:

- 1) #1: The test result does not include measurement uncertainty value
- 2) *: Refer to the module report which report No. is R2005A0283-R2V1 and R2005A0283-R4V1.

- 3) This device has installed a certified modular which FCC ID:XMR202005BG95M5, so these conducted test data directly reference the modular's data.

3. SUMMARY

3.1. Client Information

Applicant:	Eitan Medical Ltd.
Address:	29 Yad Haruzim St. P.O. Box 8639 Netanya 4250529, Israel
Manufacturer:	Eitan Medical Ltd.
Address:	29 Yad Haruzim St. P.O. Box 8639 Netanya 4250529, Israel

3.2. Product Description

Main unit information:	
Product Name:	Sapphire Connect
Trade Mark:	Eitan Medical
Model No.:	15044-000-1029
Listed Model(s):	-
Power supply:	DC 3.7V from Battery
Hardware version:	2.2
Software version:	2.0.0
Accessory unit information:	
Battery information:	LiPo Battery FT503450P 3.7V 900mAh
Adapter information:	Model: FW8000M/05 Input: 100-240V~/50-60Hz/300-150mAh Output: 5Vd.c./2200mA

3.3. Radio Specification Description

Support LTE type:	☒ Cat M1 ☐ Cat M2					
Support Operating Band:	☒ FDD Band 2 ☒ FDD Band 4 ☒ FDD Band 5 ☒ FDD Band 12					
Operating Frequency Range:	Please refer to note #2					
Channel bandwidth:	Please refer to note #3					
Maximum RB:	Cat M1					
	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz
	6	6	6	6	6	6
	Cat M2					
	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz

	6	12	24	24	24	24
Uplink Modulation type:	☒ QPSK	☒ 16QAM	☐ 64QAM	☐ 256QAM		
Downlink Modulation type:	☒ QPSK	☒ 16QAM	☐ 64QAM	☐ 256QAM		
Antenna type:	Dipole Printed Antenna					
Antenna gain #4:	Band 2: 1.5dBi	Band 4: 2.66dBi	Band 5: -10.0dBi			
	Band 12: -1.41dBi					

Note:

○ ☒: means that this feature is supported; ☐: means that this feature is not supported

○ #2: Operating frequency range is as follow:

LTE Band	Uplink frequency	Downlink frequency
FDD Band 2	1850.7 – 1909.3 MHz	1930.7 – 1989.3 MHz
FDD Band 4	1710.7 – 1754.3 MHz	2110.7 – 2154.3 MHz
FDD Band 5	824.7 – 848.3 MHz	869.7 – 893.3 MHz
FDD Band 12	699.7 – 715.3 MHz	729.7 – 745.3 MHz

○ #3: Supported channel bandwidth is as follow:

LTE Band	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz
FDD Band 2	√	√	√	√	√	√
FDD Band 4	√	√	√	√	√	√
FDD Band 5	√	√	√	√	-	-
FDD Band 12	√	√	√	√	-	-

√: means that this feature is supported; -: means that this feature is not supported

○ #4: The antenna gain is provided by the applicant, and the applicant should be responsible for its authenticity, HTW lab has not verified the authenticity of its information

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	Building 7, Baiwang Idea Factory, No.1051, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong, China	
Contact information:	Phone: 400-963-0755 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC Registration Number	762235
	FCC Designation Number	CN1181

4. TEST CONFIGURATION

4.1. Test frequency list

FDD Band 2	<table><tr><th>Test Frequency ID</th><th>Bandwidth [MHz]</th><th>N_{UL}</th><th>Frequency of Uplink [MHz]</th><th>N_{DL}</th><th>Frequency of Downlink [MHz]</th></tr><tr><td rowspan="6">Low Range</td><td>1.4</td><td>18607</td><td>1850.7</td><td>607</td><td>1930.7</td></tr><tr><td>3</td><td>18615</td><td>1851.5</td><td>615</td><td>1931.5</td></tr><tr><td>5</td><td>18625</td><td>1852.5</td><td>625</td><td>1932.5</td></tr><tr><td>10</td><td>18650</td><td>1855</td><td>650</td><td>1935</td></tr><tr><td>15 ^[1]</td><td>18675</td><td>1857.5</td><td>675</td><td>1937.5</td></tr><tr><td>20 ^[1]</td><td>18700</td><td>1860</td><td>700</td><td>1940</td></tr><tr><td>Mid Range</td><td>1.4/3/5/10/15 ^[1]/20 ^[1]</td><td>18900</td><td>1880</td><td>900</td><td>1960</td></tr><tr><td rowspan="6">High Range</td><td>1.4</td><td>19193</td><td>1909.3</td><td>1193</td><td>1989.3</td></tr><tr><td>3</td><td>19185</td><td>1908.5</td><td>1185</td><td>1988.5</td></tr><tr><td>5</td><td>19175</td><td>1907.5</td><td>1175</td><td>1987.5</td></tr><tr><td>10</td><td>19150</td><td>1905</td><td>1150</td><td>1985</td></tr><tr><td>15 ^[1]</td><td>19125</td><td>1902.5</td><td>1125</td><td>1982.5</td></tr><tr><td>20 ^[1]</td><td>19100</td><td>1900</td><td>1100</td><td>1980</td></tr></table> NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.	Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]	Low Range	1.4	18607	1850.7	607	1930.7	3	18615	1851.5	615	1931.5	5	18625	1852.5	625	1932.5	10	18650	1855	650	1935	15 ^[1]	18675	1857.5	675	1937.5	20 ^[1]	18700	1860	700	1940	Mid Range	1.4/3/5/10/15 ^[1] /20 ^[1]	18900	1880	900	1960	High Range	1.4	19193	1909.3	1193	1989.3	3	19185	1908.5	1185	1988.5	5	19175	1907.5	1175	1987.5	10	19150	1905	1150	1985	15 ^[1]	19125	1902.5	1125	1982.5	20 ^[1]	19100	1900	1100	1980
Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]																																																																						
Low Range	1.4	18607	1850.7	607	1930.7																																																																						
	3	18615	1851.5	615	1931.5																																																																						
	5	18625	1852.5	625	1932.5																																																																						
	10	18650	1855	650	1935																																																																						
	15 ^[1]	18675	1857.5	675	1937.5																																																																						
	20 ^[1]	18700	1860	700	1940																																																																						
Mid Range	1.4/3/5/10/15 ^[1] /20 ^[1]	18900	1880	900	1960																																																																						
High Range	1.4	19193	1909.3	1193	1989.3																																																																						
	3	19185	1908.5	1185	1988.5																																																																						
	5	19175	1907.5	1175	1987.5																																																																						
	10	19150	1905	1150	1985																																																																						
	15 ^[1]	19125	1902.5	1125	1982.5																																																																						
	20 ^[1]	19100	1900	1100	1980																																																																						
FDD Band 4	<table><tr><th>Test Frequency ID</th><th>Bandwidth [MHz]</th><th>N_{UL}</th><th>Frequency of Uplink [MHz]</th><th>N_{DL}</th><th>Frequency of Downlink [MHz]</th></tr><tr><td rowspan="6">Low Range</td><td>1.4</td><td>19957</td><td>1710.7</td><td>1957</td><td>2110.7</td></tr><tr><td>3</td><td>19965</td><td>1711.5</td><td>1965</td><td>2111.5</td></tr><tr><td>5</td><td>19975</td><td>1712.5</td><td>1975</td><td>2112.5</td></tr><tr><td>10</td><td>20000</td><td>1715</td><td>2000</td><td>2115</td></tr><tr><td>15</td><td>20025</td><td>1717.5</td><td>2025</td><td>2117.5</td></tr><tr><td>20</td><td>20050</td><td>1720</td><td>2050</td><td>2120</td></tr><tr><td>Mid Range</td><td>1.4/3/5/10/15/20</td><td>20175</td><td>1732.5</td><td>2175</td><td>2132.5</td></tr><tr><td rowspan="6">High Range</td><td>1.4</td><td>20393</td><td>1754.3</td><td>2393</td><td>2154.3</td></tr><tr><td>3</td><td>20385</td><td>1753.5</td><td>2385</td><td>2153.5</td></tr><tr><td>5</td><td>20375</td><td>1752.5</td><td>2375</td><td>2152.5</td></tr><tr><td>10</td><td>20350</td><td>1750</td><td>2350</td><td>2150</td></tr><tr><td>15</td><td>20325</td><td>1747.5</td><td>2325</td><td>2147.5</td></tr><tr><td>20</td><td>20300</td><td>1745</td><td>2300</td><td>2145</td></tr></table>	Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]	Low Range	1.4	19957	1710.7	1957	2110.7	3	19965	1711.5	1965	2111.5	5	19975	1712.5	1975	2112.5	10	20000	1715	2000	2115	15	20025	1717.5	2025	2117.5	20	20050	1720	2050	2120	Mid Range	1.4/3/5/10/15/20	20175	1732.5	2175	2132.5	High Range	1.4	20393	1754.3	2393	2154.3	3	20385	1753.5	2385	2153.5	5	20375	1752.5	2375	2152.5	10	20350	1750	2350	2150	15	20325	1747.5	2325	2147.5	20	20300	1745	2300	2145
Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]																																																																						
Low Range	1.4	19957	1710.7	1957	2110.7																																																																						
	3	19965	1711.5	1965	2111.5																																																																						
	5	19975	1712.5	1975	2112.5																																																																						
	10	20000	1715	2000	2115																																																																						
	15	20025	1717.5	2025	2117.5																																																																						
	20	20050	1720	2050	2120																																																																						
Mid Range	1.4/3/5/10/15/20	20175	1732.5	2175	2132.5																																																																						
High Range	1.4	20393	1754.3	2393	2154.3																																																																						
	3	20385	1753.5	2385	2153.5																																																																						
	5	20375	1752.5	2375	2152.5																																																																						
	10	20350	1750	2350	2150																																																																						
	15	20325	1747.5	2325	2147.5																																																																						
	20	20300	1745	2300	2145																																																																						
FDD Band 5	<table><tr><th>Test Frequency ID</th><th>Bandwidth [MHz]</th><th>N_{UL}</th><th>Frequency of Uplink [MHz]</th><th>N_{DL}</th><th>Frequency of Downlink [MHz]</th></tr><tr><td rowspan="4">Low Range</td><td>1.4</td><td>20407</td><td>824.7</td><td>2407</td><td>869.7</td></tr><tr><td>3</td><td>20415</td><td>825.5</td><td>2415</td><td>870.5</td></tr><tr><td>5</td><td>20425</td><td>826.5</td><td>2425</td><td>871.5</td></tr><tr><td>10 ^[1]</td><td>20450</td><td>829</td><td>2450</td><td>874</td></tr><tr><td>Mid Range</td><td>1.4/3/5/10 ^[1]</td><td>20525</td><td>836.5</td><td>2525</td><td>881.5</td></tr><tr><td rowspan="4">High Range</td><td>1.4</td><td>20643</td><td>848.3</td><td>2643</td><td>893.3</td></tr><tr><td>3</td><td>20635</td><td>847.5</td><td>2635</td><td>892.5</td></tr><tr><td>5</td><td>20625</td><td>846.5</td><td>2625</td><td>891.5</td></tr><tr><td>10 ^[1]</td><td>20600</td><td>844</td><td>2600</td><td>889</td></tr></table> NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.	Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]	Low Range	1.4	20407	824.7	2407	869.7	3	20415	825.5	2415	870.5	5	20425	826.5	2425	871.5	10 ^[1]	20450	829	2450	874	Mid Range	1.4/3/5/10 ^[1]	20525	836.5	2525	881.5	High Range	1.4	20643	848.3	2643	893.3	3	20635	847.5	2635	892.5	5	20625	846.5	2625	891.5	10 ^[1]	20600	844	2600	889																				
Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]																																																																						
Low Range	1.4	20407	824.7	2407	869.7																																																																						
	3	20415	825.5	2415	870.5																																																																						
	5	20425	826.5	2425	871.5																																																																						
	10 ^[1]	20450	829	2450	874																																																																						
Mid Range	1.4/3/5/10 ^[1]	20525	836.5	2525	881.5																																																																						
High Range	1.4	20643	848.3	2643	893.3																																																																						
	3	20635	847.5	2635	892.5																																																																						
	5	20625	846.5	2625	891.5																																																																						
	10 ^[1]	20600	844	2600	889																																																																						
FDD Band 12	Table 4.3.1.1.12-1: Test frequencies for E-UTRA channel bandwidth for operating band 12 <table><tr><th>Test Frequency ID</th><th>Bandwidth [MHz]</th><th>N_{UL}</th><th>Frequency of Uplink [MHz]</th><th>N_{DL}</th><th>Frequency of Downlink [MHz]</th></tr><tr><td rowspan="4">Low Range</td><td>1.4</td><td>23017</td><td>699.7</td><td>5017</td><td>729.7</td></tr><tr><td>3</td><td>23025</td><td>700.5</td><td>5025</td><td>730.5</td></tr><tr><td>5 ^[1]</td><td>23035</td><td>701.5</td><td>5035</td><td>731.5</td></tr><tr><td>10 ^[1]</td><td>23060</td><td>704</td><td>5060</td><td>734</td></tr><tr><td>Mid Range</td><td>1.4/3/5 ^[1]/10 ^[1]</td><td>23095</td><td>707.5</td><td>5095</td><td>737.5</td></tr><tr><td rowspan="4">High Range</td><td>1.4</td><td>23173</td><td>715.3</td><td>5173</td><td>745.3</td></tr><tr><td>3</td><td>23165</td><td>714.5</td><td>5165</td><td>744.5</td></tr><tr><td>5 ^[1]</td><td>23155</td><td>713.5</td><td>5155</td><td>743.5</td></tr><tr><td>10 ^[1]</td><td>23130</td><td>711</td><td>5130</td><td>741</td></tr></table> NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.	Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]	Low Range	1.4	23017	699.7	5017	729.7	3	23025	700.5	5025	730.5	5 ^[1]	23035	701.5	5035	731.5	10 ^[1]	23060	704	5060	734	Mid Range	1.4/3/5 ^[1] /10 ^[1]	23095	707.5	5095	737.5	High Range	1.4	23173	715.3	5173	745.3	3	23165	714.5	5165	744.5	5 ^[1]	23155	713.5	5155	743.5	10 ^[1]	23130	711	5130	741																				
Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]																																																																						
Low Range	1.4	23017	699.7	5017	729.7																																																																						
	3	23025	700.5	5025	730.5																																																																						
	5 ^[1]	23035	701.5	5035	731.5																																																																						
	10 ^[1]	23060	704	5060	734																																																																						
Mid Range	1.4/3/5 ^[1] /10 ^[1]	23095	707.5	5095	737.5																																																																						
High Range	1.4	23173	715.3	5173	745.3																																																																						
	3	23165	714.5	5165	744.5																																																																						
	5 ^[1]	23155	713.5	5155	743.5																																																																						
	10 ^[1]	23130	711	5130	741																																																																						

4.2. Test mode

Test mode	Link mode
-----------	-----------

- 1) Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems and ANSI C63.26 with maximum output power.
- 2) Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Test configuration is as follow:

Test Items	Bandwidth	Modulation	RB #		
			1	Half	Full
Radiated Spurious Emission	#5	#6	○	-	-

Note:

- #5: Test all kind of bandwidth in section 3.3
- #6: Test all kind of uplink modulation in section 3.3
- ○: means that this configuration is chosen for testing
- -: means that this configuration is not test.
- The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different bandwidth, modulations and RB size/offset in exploratory test. Subsequently, only the worst case emissions (highest bandwidth, QPSK, and 1RB0) are reported.


4.3. Test sample information

Test item	HTW sample no.
Radiated test items	YPHT25060472003

Note:

Radiated test items: Radiated Spurious Emission

4.4. Setup Diagram for Tests

Test item	Configuration
Radiated test items	 <pre> graph LR Adapter[Adapter] --- EUT[EUT] ANT[ANT] --- CMW500[CMW500] </pre>

4.5. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?				
✓ No				
Item	Equipment	Trade Name	Model No.	Other
1				
2				

4.6. Testing environmental condition

Voltage	VN=Nominal Voltage	DC 3.70V
Temperature	TN=Normal Temperature	25 °C
Humidity	30~60 %	
Air Pressure	950-1050 hPa	

4.7. Statement of the measurement uncertainty

No.	Test Items	Measurement Uncertainty
1	Radiated Spurious Emission	4.54dB for 30MHz-1GHz 5.10dB for above 1GHz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.8. Equipments Used during the Test

● RF Test Software					
Used	Test Item	Software Name	Manufacturer	Equipment No.	Version
●	Radiated Spurious Emission	E3	AUDIX	HTWER006	V6.110407a

● Radiated Spurious Emission							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	C11121	2023/4/17	2026/4/16
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2024/8/12	2025/8/11
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2025/8/6	2026/8/5
●	Spectrum Analyzer	Agilent	HTWE0385	N9020A	MY54486658	2024/8/12	2025/8/11
●	Spectrum Analyzer	Agilent	HTWE0385	N9020A	MY54486658	2025/8/6	2026/8/5
●	Vector signal generator	R&S	HTWE0244	SMBV100A	260790	2025/3/13	2026/3/12
●	Attenuator	Eastsheep	HTWE0387	NCP-20-3-100W	/	2025/3/26	2026/3/25
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0123	VULB9163	538	2024/4/8	2027/4/7
●	Horn Antenna	SCHWARZBECK	HTWE0126	BBHA 9120D	1011	2023/2/14	2026/2/13
●	Horn Antenna	STEATITE	HTWE0549	QMS-00880	25661	2025/4/14	2028/4/13
●	Pre-Amplifier	CD	HTWE0071	PAP-0102	12004	2025/5/26	2026/5/25
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0551	SCU18F	100855	2025/5/26	2026/5/25
●	Pre-amplifier	SCHWARZBECK	HTWE0552	SCU40F1	100619	2025/5/26	2026/5/25

● Auxiliary Equipment							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Radio communication tester	R&S	HTWE0323	CMW500	137681	2025/3/13	2026/3/12
●	High pass filter	Wainwright	HTWE0297	WHKX3.0/18G-10SS	38	2025/5/26	2026/5/25
●	Band Stop filter	-	HTWE0039	N/A	N/A	2025/1/21	2026/1/20

5. TEST CONDITIONS AND RESULTS

5.1. ERP and EIRP

LIMIT

LTE Band 2: 2W(33dBm) EIRP

LTE Band 4: 1W(30dBm) EIRP

LTE Band 5: 7W(38.50dBm) ERP

LTE Band 12: 3W(34.77dBm) ERP

TEST PROCEDURE

1. According to the power tested in section 5.1, select the maximum power in each mode, and use the following formula to calculate the corresponding ERP/EIRP.
2. $ERP = \text{conducted power} + \text{Gain(dBd)}$
3. $EIRP = \text{conducted power} + \text{Gain(dBi)}$
 $ERP = EIRP - 2.15$

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

TEST DATA

Band	Bandwidth	Mode	Conducted Power (dBm)	Antenna Gain (dBi)	ERP		Limit (W)	Verdict
					(dBm)	(W)		
Band 5	1.4MHz	QPSK	23.64	-10.00	11.49	0.0141	7	PASS
		16QAM	23.13	-10.00	10.98	0.0125	7	PASS
	3MHz	QPSK	23.75	-10.00	11.60	0.0145	7	PASS
		16QAM	23.21	-10.00	11.06	0.0128	7	PASS
	5MHz	QPSK	23.98	-10.00	11.83	0.0152	7	PASS
		16QAM	23.65	-10.00	11.50	0.0141	7	PASS
	10MHz	QPSK	23.95	-10.00	11.80	0.0151	7	PASS
		16QAM	23.98	-10.00	11.83	0.0152	7	PASS

Band	Bandwidth	Mode	Conducted Power (dBm)	Antenna Gain (dBi)	ERP		Limit (W)	Verdict
					(dBm)	(W)		
Band 12	1.4MHz	QPSK	23.03	-1.41	19.47	0.0885	3	PASS
		16QAM	22.41	-1.41	18.85	0.0767	3	PASS
	3MHz	QPSK	23.60	-1.41	20.04	0.1009	3	PASS
		16QAM	22.23	-1.41	18.67	0.0736	3	PASS
	5MHz	QPSK	23.24	-1.41	19.68	0.0929	3	PASS
		16QAM	23.12	-1.41	19.56	0.0904	3	PASS
	10MHz	QPSK	23.33	-1.41	19.77	0.0948	3	PASS
		16QAM	23.21	-1.41	19.65	0.0923	3	PASS

Note: Conducted power refer to module FCC ID:XMR202005BG95M5.

Band	Bandwidth	Mode	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP		Limit (W)	Verdict
					(dBm)	(W)		
Band 2	1.4MHz	QPSK	23.50	1.50	25.00	0.3162	2	PASS
		16QAM	23.58	1.50	25.08	0.3221	2	PASS
	3MHz	QPSK	23.44	1.50	24.94	0.3119	2	PASS
		16QAM	22.05	1.50	23.55	0.2265	2	PASS
	5MHz	QPSK	23.37	1.50	24.87	0.3069	2	PASS
		16QAM	23.35	1.50	24.85	0.3055	2	PASS
	10MHz	QPSK	23.45	1.50	24.95	0.3126	2	PASS
		16QAM	23.64	1.50	25.14	0.3266	2	PASS
	15MHz	QPSK	23.14	1.50	24.64	0.2911	2	PASS
		16QAM	23.24	1.50	24.74	0.2979	2	PASS
Band 4	1.4MHz	QPSK	23.69	2.66	26.35	0.4315	1	PASS
		16QAM	22.74	2.66	25.40	0.3467	1	PASS
	3MHz	QPSK	23.62	2.66	26.28	0.4246	1	PASS
		16QAM	22.85	2.66	25.51	0.3556	1	PASS
	5MHz	QPSK	23.56	2.66	26.22	0.4188	1	PASS
		16QAM	23.76	2.66	26.42	0.4385	1	PASS
	10MHz	QPSK	23.66	2.66	26.32	0.4285	1	PASS
		16QAM	23.62	2.66	26.28	0.4246	1	PASS
	15MHz	QPSK	23.64	2.66	26.30	0.4266	1	PASS
		16QAM	23.65	2.66	26.31	0.4276	1	PASS
	20MHz	QPSK	23.58	2.66	26.24	0.4207	1	PASS
		16QAM	23.61	2.66	26.27	0.4236	1	PASS


Note: Conducted power refer to module FCC ID:XMR202005BG95M5.

5.2. Radiated Spurious Emission

LIMIT

LTE Band 2/4/5/12: -13dBm

TEST CONFIGURATION

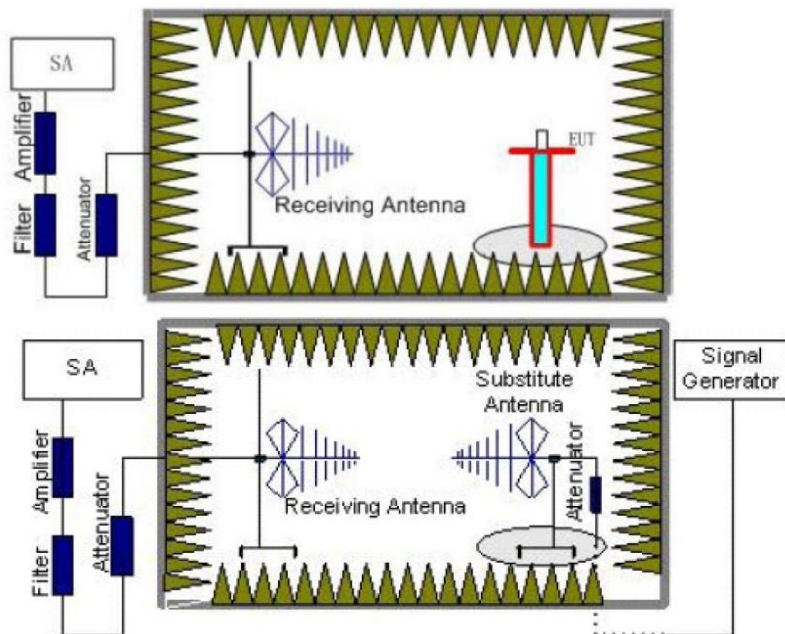

TEST PROCEDURE

1. Place the EUT in the center of the turntable.
 - a) For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
 - b) For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
2. Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
3. The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
4. Receiver or Spectrum set as follow:

Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto

Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peak, Sweep time=Auto
5. Each emission under consideration shall be evaluated:
 - a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - c) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - e) Record the measured emission amplitude level and frequency
6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal

and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.

7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
10. For each emission that was detected and measured in the initial test
 - a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
 - c) Record the output power level of the signal generator when equivalence is achieved in step b).
11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.
12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
where
 P_e = equivalent emission power in dBm
 P_s = source (signal generator) power in dBm
NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:
$$\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}.$$
If necessary, the antenna gain can be calculated from calibrated antenna factor information
14. Provide the complete measurement results as a part of the test report.

TEST MODE

Please refer to the clause 4.2

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Note: only show the worse case for QPSK modulation.

LTE Band 2									
Test channel:		Low		Polarization:			Horizontal		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	45.75	-69.89	25.22	1.24	30.93	-74.36	-13.00	-61.36	Peak
2	400.56	-71.14	25.43	3.95	29.80	-71.56	-13.00	-58.56	Peak
3	3700.26	-53.11	42.29	5.22	40.76	-46.36	-13.00	-33.36	Peak
4	6001.77	-54.55	44.56	6.70	39.23	-42.52	-13.00	-29.52	Peak
5	7508.69	-55.66	48.05	7.79	39.93	-39.75	-13.00	-26.75	Peak
6	10011.21	-56.77	50.43	8.61	39.91	-37.64	-13.00	-24.64	Peak
Test channel:		Low		Polarization:			Vertical		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	45.75	-65.22	21.68	1.24	30.93	-73.23	-13.00	-60.23	Peak
2	400.56	-65.19	25.25	3.95	29.80	-65.79	-13.00	-52.79	Peak
3	3498.74	-53.14	41.10	5.07	40.93	-47.90	-13.00	-34.90	Peak
4	4996.69	-55.88	44.50	6.00	40.20	-45.58	-13.00	-32.58	Peak
5	6001.77	-55.75	44.76	6.70	39.23	-43.52	-13.00	-30.52	Peak
6	10011.21	-57.30	50.54	8.61	39.91	-38.06	-13.00	-25.06	Peak

Test channel:		Middle		Polarization:			Horizontal		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	45.75	-69.78	25.22	1.24	30.93	-74.25	-13.00	-61.25	Peak
2	400.56	-69.35	25.43	3.95	29.80	-69.77	-13.00	-56.77	Peak
3	3747.66	-54.00	42.24	5.24	40.68	-47.20	-13.00	-34.20	Peak
4	5747.59	-55.94	43.93	6.67	39.36	-44.70	-13.00	-31.70	Peak
5	6001.77	-53.44	44.56	6.70	39.23	-41.41	-13.00	-28.41	Peak
6	10011.21	-55.61	50.43	8.61	39.91	-36.48	-13.00	-23.48	Peak
Test channel:		Middle		Polarization:			Vertical		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	94.74	-79.54	25.82	1.82	30.60	-82.50	-13.00	-69.50	Peak
2	400.56	-73.45	25.25	3.95	29.80	-74.05	-13.00	-61.05	Peak
3	3498.74	-53.59	41.10	5.07	40.93	-48.35	-13.00	-35.35	Peak
4	5504.17	-55.57	44.00	6.40	39.71	-44.88	-13.00	-31.88	Peak
5	7508.69	-59.34	48.40	7.79	39.93	-43.08	-13.00	-30.08	Peak
6	10011.21	-59.77	50.54	8.61	39.91	-40.53	-13.00	-27.53	Peak

Test channel:		High		Polarization:			Horizontal		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	44.64	-65.41	25.69	1.22	30.94	-69.44	-13.00	-56.44	Peak
2	400.56	-66.30	25.43	3.95	29.80	-66.72	-13.00	-53.72	Peak
3	3786.01	-54.70	42.20	5.26	40.61	-47.85	-13.00	-34.85	Peak
4	5747.59	-54.33	43.93	6.67	39.36	-43.09	-13.00	-30.09	Peak
5	7508.69	-57.70	48.05	7.79	39.93	-41.79	-13.00	-28.79	Peak
6	10750.81	-59.33	52.31	8.90	40.45	-38.57	-13.00	-25.57	Peak
Test channel:		High		Polarization:			Vertical		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	45.75	-67.30	21.68	1.24	30.93	-75.31	-13.00	-62.31	Peak
2	400.56	-70.90	25.25	3.95	29.80	-71.50	-13.00	-58.50	Peak
3	3498.74	-52.15	41.10	5.07	40.93	-46.91	-13.00	-33.91	Peak
4	5674.90	-54.21	43.99	6.59	39.47	-43.10	-13.00	-30.10	Peak
5	7508.69	-57.98	48.40	7.79	39.93	-41.72	-13.00	-28.72	Peak
6	10011.21	-59.76	50.54	8.61	39.91	-40.52	-13.00	-27.52	Peak

LTE Band 4									
Test channel:		Low		Polarization:			Horizontal		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	45.75	-64.87	25.22	1.24	30.93	-69.34	-13.00	-56.34	Peak
2	400.56	-65.86	25.43	3.95	29.80	-66.28	-13.00	-53.28	Peak
3	3419.49	-45.30	39.86	4.92	40.84	-41.36	-13.00	-28.36	Peak
4	5138.58	-48.50	44.07	6.11	40.04	-38.36	-13.00	-25.36	Peak
5	7508.69	-58.00	48.05	7.79	39.93	-42.09	-13.00	-29.09	Peak
6	10011.21	-56.28	50.43	8.61	39.91	-37.15	-13.00	-24.15	Peak
Test channel:		Low		Polarization:			Vertical		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	45.75	-67.46	21.68	1.24	30.93	-75.47	-13.00	-62.47	Peak
2	400.56	-71.16	25.25	3.95	29.80	-71.76	-13.00	-58.76	Peak
3	3419.49	-47.95	39.88	4.92	40.84	-43.99	-13.00	-30.99	Peak
4	5138.58	-48.27	44.10	6.11	40.04	-38.10	-13.00	-25.10	Peak
5	6001.77	-53.56	44.76	6.70	39.23	-41.33	-13.00	-28.33	Peak
6	10011.21	-59.99	50.54	8.61	39.91	-40.75	-13.00	-27.75	Peak

Test channel:		Middle		Polarization:			Horizontal		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	45.75	-67.79	25.22	1.24	30.93	-72.26	-13.00	-59.26	Peak
2	400.56	-70.09	25.43	3.95	29.80	-70.51	-13.00	-57.51	Peak
3	3445.70	-45.03	40.24	4.97	40.87	-40.69	-13.00	-27.69	Peak
4	6001.77	-54.51	44.56	6.70	39.23	-42.48	-13.00	-29.48	Peak
5	8506.17	-56.44	47.21	8.24	40.20	-41.19	-13.00	-28.19	Peak
6	10011.21	-56.45	50.43	8.61	39.91	-37.32	-13.00	-24.32	Peak
Test channel:		Middle		Polarization:			Vertical		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	45.75	-64.82	21.68	1.24	30.93	-72.83	-13.00	-59.83	Peak
2	703.10	-68.41	28.55	5.38	29.30	-63.78	-13.00	-50.78	Peak
3	3445.70	-52.05	40.28	4.97	40.87	-47.67	-13.00	-34.67	Peak
4	5177.97	-51.34	43.98	6.15	39.99	-41.20	-13.00	-28.20	Peak
5	6903.71	-58.95	47.38	7.39	39.42	-43.60	-13.00	-30.60	Peak
6	10011.21	-56.14	50.54	8.61	39.91	-36.90	-13.00	-23.90	Peak

Test channel:		High		Polarization:			Horizontal		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	44.64	-69.07	25.69	1.22	30.94	-73.10	-13.00	-60.10	Peak
2	400.56	-70.96	25.43	3.95	29.80	-71.38	-13.00	-58.38	Peak
3	3472.12	-48.48	40.61	5.02	40.90	-43.75	-13.00	-30.75	Peak
4	6001.77	-55.32	44.56	6.70	39.23	-43.29	-13.00	-30.29	Peak
5	7508.69	-56.37	48.05	7.79	39.93	-40.46	-13.00	-27.46	Peak
6	10011.21	-55.50	50.43	8.61	39.91	-36.37	-13.00	-23.37	Peak
Test channel:		High		Polarization:			Vertical		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	45.75	-69.73	21.68	1.24	30.93	-77.74	-13.00	-64.74	Peak
2	400.56	-70.18	25.25	3.95	29.80	-70.78	-13.00	-57.78	Peak
3	3498.74	-52.42	41.10	5.07	40.93	-47.18	-13.00	-34.18	Peak
4	5204.40	-52.74	43.92	6.17	39.96	-42.61	-13.00	-29.61	Peak
5	6001.77	-53.16	44.76	6.70	39.23	-40.93	-13.00	-27.93	Peak
6	10011.21	-59.82	50.54	8.61	39.91	-40.58	-13.00	-27.58	Peak

LTE Band 5									
Test channel:		Low		Polarization:			Horizontal		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	44.64	-65.98	25.69	1.22	30.83	-69.90	-13.00	-56.90	Peak
2	410.54	-77.63	25.71	4.03	29.29	-77.18	-13.00	-64.18	Peak
3	6001.77	-47.30	44.56	7.27	39.12	-34.59	-13.00	-21.59	Peak
4	7508.69	-57.55	48.05	7.98	39.20	-40.72	-13.00	-27.72	Peak
5	10011.21	-58.16	50.43	8.81	40.62	-39.54	-13.00	-26.54	Peak
6	12024.96	-61.26	52.57	10.11	40.79	-39.37	-13.00	-26.37	Peak
Test channel:		Low		Polarization:			Vertical		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	45.75	-65.87	21.68	1.24	30.83	-73.78	-13.00	-60.78	Peak
2	496.39	-79.92	26.17	4.47	29.27	-78.55	-13.00	-65.55	Peak
3	6001.77	-49.07	44.76	7.27	39.12	-36.16	-13.00	-23.16	Peak
4	7508.69	-57.83	48.40	7.98	39.20	-40.65	-13.00	-27.65	Peak
5	10011.21	-57.89	50.54	8.81	40.62	-39.16	-13.00	-26.16	Peak
6	11515.68	-62.57	53.20	9.33	40.02	-40.06	-13.00	-27.06	Peak

Test channel:		Middle		Polarization:			Horizontal		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	45.75	-66.56	25.22	1.24	30.83	-70.93	-13.00	-57.93	Peak
2	674.05	-74.33	28.03	5.29	29.15	-70.16	-13.00	-57.16	Peak
3	4996.69	-52.59	44.35	6.31	39.92	-41.85	-13.00	-28.85	Peak
4	6001.77	-47.59	44.56	7.27	39.12	-34.88	-13.00	-21.88	Peak
5	6511.12	-54.90	46.32	7.50	39.00	-40.08	-13.00	-27.08	Peak
6	10011.21	-57.89	50.43	8.81	40.62	-39.27	-13.00	-26.27	Peak
Test channel:		Middle		Polarization:			Vertical		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	45.75	-62.22	21.68	1.24	30.83	-70.13	-13.00	-57.13	Peak
2	639.42	-69.61	28.42	5.14	29.15	-65.20	-13.00	-52.20	Peak
3	4996.69	-57.48	44.50	6.31	39.92	-46.59	-13.00	-33.59	Peak
4	6001.77	-49.63	44.76	7.27	39.12	-36.72	-13.00	-23.72	Peak
5	10011.21	-58.20	50.54	8.81	40.62	-39.47	-13.00	-26.47	Peak
6	12024.96	-60.04	52.88	10.11	40.79	-37.84	-13.00	-24.84	Peak

Test channel:		High		Polarization:			Horizontal		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	44.64	-65.15	25.69	1.22	30.83	-69.07	-13.00	-56.07	Peak
2	438.91	-78.88	26.04	4.17	29.20	-77.87	-13.00	-64.87	Peak
3	5747.59	-51.41	43.93	7.01	39.33	-39.80	-13.00	-26.80	Peak
4	6001.77	-49.90	44.56	7.27	39.12	-37.19	-13.00	-24.19	Peak
5	7508.69	-57.86	48.05	7.98	39.20	-41.03	-13.00	-28.03	Peak
6	10011.21	-57.72	50.43	8.81	40.62	-39.10	-13.00	-26.10	Peak
Test channel:		High		Polarization:			Vertical		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	45.75	-62.48	21.68	1.24	30.83	-70.39	-13.00	-57.39	Peak
2	646.20	-69.47	28.37	5.16	29.14	-65.08	-13.00	-52.08	Peak
3	5747.59	-53.14	44.07	7.01	39.33	-41.39	-13.00	-28.39	Peak
4	6001.77	-47.15	44.76	7.27	39.12	-34.24	-13.00	-21.24	Peak
5	7508.69	-58.61	48.40	7.98	39.20	-41.43	-13.00	-28.43	Peak
6	10011.21	-59.15	50.54	8.81	40.62	-40.42	-13.00	-27.42	Peak

LTE Band 12									
Test channel:		Low		Polarization:			Horizontal		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	55.51	-95.17	24.10	1.36	0.00	-69.71	-13.00	-56.71	Peak
2	411.99	-94.27	25.76	4.00	0.00	-64.51	-13.00	-51.51	Peak
3	1406.50	-40.14	37.12	3.09	41.30	-41.23	-13.00	-28.23	Peak
4	2113.59	-35.84	40.19	3.83	41.10	-32.92	-13.00	-19.92	Peak
5	6001.77	-53.71	44.56	6.70	39.23	-41.68	-13.00	-28.68	Peak
6	10011.21	-58.17	50.43	8.61	39.91	-39.04	-13.00	-26.04	Peak
Test channel:		Low		Polarization:			Vertical		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	96.76	-95.52	25.79	1.84	0.00	-67.89	-13.00	-54.89	Peak
2	404.81	-94.85	25.28	3.97	0.00	-65.60	-13.00	-52.60	Peak
3	1406.50	-44.72	37.76	3.09	41.30	-45.17	-13.00	-32.17	Peak
4	2113.59	-42.49	40.29	3.83	41.10	-39.47	-13.00	-26.47	Peak
5	3498.74	-56.30	41.10	5.07	40.93	-51.06	-13.00	-38.06	Peak
6	9019.05	-61.83	48.73	8.41	39.99	-44.68	-13.00	-31.68	Peak

Test channel:		Middle		Polarization:			Horizontal		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	41.75	-96.54	26.96	1.18	0.00	-68.40	-13.00	-55.40	Peak
2	413.44	-94.84	25.80	4.01	0.00	-65.03	-13.00	-52.03	Peak
3	1406.50	-40.85	37.12	3.09	41.30	-41.94	-13.00	-28.94	Peak
4	2108.21	-34.37	40.14	3.82	41.10	-31.51	-13.00	-18.51	Peak
5	5747.59	-54.13	43.93	6.67	39.36	-42.89	-13.00	-29.89	Peak
6	10011.21	-56.78	50.43	8.61	39.91	-37.65	-13.00	-24.65	Peak
Test channel:		Middle		Polarization:			Vertical		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	96.76	-95.23	25.79	1.84	0.00	-67.60	-13.00	-54.60	Peak
2	503.43	-93.92	26.18	4.46	0.00	-63.28	-13.00	-50.28	Peak
3	1498.91	-50.20	37.76	3.18	41.49	-50.75	-13.00	-37.75	Peak
4	2108.21	-41.19	40.20	3.82	41.10	-38.27	-13.00	-25.27	Peak
5	3498.74	-51.55	41.10	5.07	40.93	-46.31	-13.00	-33.31	Peak
6	5504.17	-54.29	44.00	6.40	39.71	-43.60	-13.00	-30.60	Peak

Test channel:		High		Polarization:			Horizontal		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	43.71	-95.07	26.09	1.21	0.00	-67.77	-13.00	-54.77	Peak
2	449.85	-93.91	25.95	4.20	0.00	-63.76	-13.00	-50.76	Peak
3	1420.89	-35.94	37.03	3.10	41.32	-37.13	-13.00	-24.13	Peak
4	2135.22	-35.64	40.39	3.87	41.10	-32.48	-13.00	-19.48	Peak
5	7508.69	-58.17	48.05	7.79	39.93	-42.26	-13.00	-29.26	Peak
6	10011.21	-58.03	50.43	8.61	39.91	-38.90	-13.00	-25.90	Peak
Test channel:		High		Polarization:			Vertical		
Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	104.54	-95.51	25.14	1.92	0.00	-68.45	-13.00	-55.45	Peak
2	417.82	-94.76	25.36	4.03	0.00	-65.37	-13.00	-52.37	Peak
3	1420.89	-36.69	37.76	3.10	41.32	-37.15	-13.00	-24.15	Peak
4	2135.22	-36.47	40.66	3.87	41.10	-33.04	-13.00	-20.04	Peak
5	5504.17	-53.26	44.00	6.40	39.71	-42.57	-13.00	-29.57	Peak
6	10011.21	-60.51	50.54	8.61	39.91	-41.27	-13.00	-28.27	Peak

6. TEST SETUP PHOTOS OF THE EUT

Refer to the test report No.: CHTW25100017A1

7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

Refer to the test report No.: CHTW25100017A1

--- End of Report ---