



Registration
No.910917

TEST REPORT FOR RF TESTING

Report No.: SRTC2017-9004(F)-17101001(C)

Product Name: Mobile Phone

Product Model: Hisense L675 PRO

Applicant: Hisense International Co., Ltd

Manufacturer: Hisense Communications Co., Ltd.

Specification: FCC Part 24E, Part 22H Part 2 Part 27 (October, 2016
edition)

FCC ID: 2ADOBL675PRO

The State Radio_monitoring_center Testing Center (SRTC)

15th Building, No.30 Shixing Street, Shijingshan District, Beijing, China

Tel: 86-10-57996181 Fax: 86-10-57996288

CONTENTS

1. GENERAL INFORMATION.....	2
1.1 Notes of the test report.....	2
1.2 Information about the testing laboratory.....	2
1.3 Applicant's details.....	2
1.4 Manufacturer's details.....	2
1.5 Test Environment.....	3
2 DESCRIPTION OF THE EQUIPMENT UNDER TEST.....	4
2.1 Final Equipment Build Status.....	4
2.2 Summary table.....	5
2.3 Support Equipment.....	7
3 REFERENCE SPECIFICATION.....	8
4 KEY TO NOTES AND RESULT CODES.....	9
5 RESULT SUMMARY.....	10
6 TEST RESULT.....	11
7 MEASUREMENT UNCERTAINTIES.....	23
8 TEST EQUIPMENTS.....	24
APPENDIX A – TEST DATA OF CONDUCTED EMISSION.....	25
APPENDIX B – TEST DATA OF RADIATED EMISSION.....	25
APPENDIX C – TEST SETUP.....	25
APPENDIX A – TEST DATA OF CONDUCTED EMISSION.....	26
1 RF Power Output-FCC Part 2.1046.....	26
2 Occupied Bandwidth-FCC Part 2.1049/27.53(h)(1).....	38
3 Emission Bandwidth-FCC Part22.917(b).....	279
4 Peak-Average Ratio -FCC Part 27.50(d)(5).....	520
5 Spurious Emissions at antenna terminal-FCC Part 2.1051/27.53(h)/22.53(m).....	540
6 Band Edges Compliance-FCC Part 2.1051 27.53(h)/22.53(m).....	781
7 Frequency Stability-FCC Part 2.1055/27.54.....	942
APPENDIX B – TEST DATA OF RADIATED EMISSION.....	948
APPENDIX C –TEST SETUP.....	956

1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District
City:	Beijing
Country or Region:	P.R.China
Contacted person:	liujia
Tel:	+86 10 5799 6181
Fax:	+86 10 5799 6288
Email:	liujiaf@srtc.org.cn

1.3 Applicant's details

Company:	Hisense International Co., Ltd.
Address:	Floor 22, Hisense Tower, 17 Donghai Xi Road, Qingdao, 266071, China
City:	Qingdao
Country or Region:	P.R.China
Grantee Code:	2ADOB
Contacted person:	Zhang Kelin
Tel:	86-532-55753242
Fax:	----
Email:	zhangkelin@hisense.com

1.4 Manufacturer's details

Company:	Hisense Communications Co., Ltd.
Address:	218 Qianwangang Road, Economic & Technological Development Zone, Qingdao, Shandong Province, P.R. China
City:	Qingdao
Country or Region:	P.R.China
Contacted person:	Li Xin
Tel:	86-532-55755993
Fax:	----
Email:	linxin12@hisense.com

1.5 Test Environment

Date of Receipt of test sample at SRTC:	2017.04.27
Testing Start Date:	2017.04.27
Testing End Date:	2017.10.24

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	25	38
Maximum Extreme	55	80
Minimum Extreme	-10	---

Normal Supply Voltage (V d.c.):	3.80
Maximum Extreme Supply Voltage (V d.c.):	4.35
Minimum Extreme Supply Voltage (V d.c.):	3.50

2 DESCRIPTION OF THE EQUIPMENT UNDER TEST

2.1 Final Equipment Build Status

Frequency Range	LTE Band 2: Tx:1850~1910MHz Rx:1930~1990MHz LTE Band 4: Tx:1710~1755MHz Rx:2110~2155MHz LTE Band 5: Tx:825~850MHz Rx:870~900MHz LTE Band 7: Tx:2500~2570MHz Rx:2620~2690MHz
Modulation Type	QPSK 16QAM
Duplex Mode	FDD
Antenna Type	Fixed Internal
Power Supply	Battery or Charger
HW Version	V1.00
SW Version	L1402.6.02.02.MX05
IMEI	863721030069535

2.2 Summary table.

FCC Rule Part	Frequency Range(MHz)	Output Power(W)	Frequency Tolerance	Emission Designator	Emission Bandwidth (MHz)	Communication Type
GSM						
22H	824.2-848.8	1.12	0.016	300KGXW	---	GPRS 850
	824.2-848.8	0.93	0.018	300KG7W	---	EGPRS850
24E	1850.2-1909.8	0.46	0.016	300KGXW	---	GPRS 1900
	1850.2-1909.8	0.39	0.018	300KG7W	---	EGPRS1900
WCDMA						
22H	826.4-846.6	0.25	0.015	4M50F9W	---	WCDMA
	826.4-846.6	0.19	0.018	4M50F9W	---	HSDPA/UPA
24E	1852.4-1907.6	0.18	0.016	4M50F9W	---	WCDMA
	1852.4-1907.6	0.17	0.018	4M50F9W	---	HSDPA/UPA
LTE BAND2						
24E	1850.7-1909.3	0.22	0.005	1M40G7D	1.4M	QPSK
	1850.7-1909.3	0.17	0.005	1M40D7W	1.4M	16QAM
	1851.5-1908.5	0.20	0.005	3M00G7D	3M	QPSK
	1851.5-1908.5	0.16	0.005	3M00D7W	3M	16QAM
	1852.5-1907.5	0.21	0.005	5M00G7D	5M	QPSK
	1852.5-1907.5	0.16	0.005	5M00D7W	5M	16QAM
	1855-1905	0.21	0.005	10M0G7D	10M	QPSK
	1855-1905	0.16	0.005	10M0D7W	10M	16QAM
	1857.5-1902.5	0.21	0.005	15M0G7D	15M	QPSK
	1857.5-1902.5	0.16	0.005	15M0D7W	15M	16QAM
	1860-1900	0.21	0.005	20M0G7D	20M	QPSK
	1860-1900	0.16	0.005	20M0D7W	20M	16QAM
LTE BAND4						
27L	1710.7-1754.3	0.18	0.005	1M40G7D	1.4M	QPSK
	1710.7-1754.3	0.14	0.005	1M40D7W	1.4M	16QAM
	1711.5-1753.5	0.17	0.005	3M00G7D	3M	QPSK
	1711.5-1753.5	0.13	0.005	3M00D7W	3M	16QAM
	1712.5-1752.5	0.18	0.005	5M00G7D	5M	QPSK
	1712.5-1752.5	0.14	0.005	5M00D7W	5M	16QAM
	1715-1750	0.18	0.005	10M0G7D	10M	QPSK
	1715-1750	0.14	0.005	10M0D7W	10M	16QAM
	1717.5-1747.5	0.18	0.005	15M0G7D	15M	QPSK
	1717.5-1747.5	0.14	0.005	15M0D7W	15M	16QAM
	1720-1745	0.18	0.005	20M0G7D	20M	QPSK
	1720-1745	0.14	0.005	20M0D7W	20M	16QAM
LTE BAND7						
27B	2502.5-2567.5	0.21	0.005	5M00G7D	5M	QPSK
	2502.5-2567.5	0.16	0.005	5M00D7W	5M	16QAM

	2505-2565	0.21	0.005	10M0G7D	10M	QPSK
	2505-2565	0.16	0.005	10M0D7W	10M	16QAM
	2507.5-2562.5	0.21	0.005	15M0G7D	15M	QPSK
	2507.5-2562.5	0.16	0.005	15M0D7W	15M	16QAM
	2510-2560	0.22	0.005	20M0G7D	20M	QPSK
	2510-2560	0.16	0.005	20M0D7W	20M	16QAM
LTE BAND5						
22H	824.7-848.3	0.08	0.005	1M40G7D	1.4M	QPSK
	824.7-848.3	0.06	0.005	1M40D7W	1.4M	16QAM
	825.5-847.5	0.08	0.005	3M00G7D	3M	QPSK
	825.5-847.5	0.06	0.005	3M00D7W	3M	16QAM
	826.5-846.5	0.07	0.005	5M00G7D	5M	QPSK
	826.5-846.5	0.06	0.005	5M00D7W	5M	16QAM
	829-844	0.05	0.005	10M0G7D	10M	QPSK
	829-844	0.04	0.005	10M0D7W	10M	16QAM

2.3 Support Equipment

The following support equipment was used to exercise the EUT during testing:

Equipment	Battery
Manufacturer	TMB
Model Number	LIW38238
Serial Number	----

Equipment	Battery
Manufacturer	VEKEN
Model Number	LIW38238
Serial Number	----

As the information described above, there are one models of battery manufactured by two companies. The relevant tests have been performed in order to verify in which combination case (EUT exercised by one models of battery manufactured by two companies) the EUT would have the worst features. So all the tests shown in this test report are performed when the EUT exercised by the battery 1 manufactured by TMB

3 REFERENCE SPECIFICATION

Specification	Version	Title
2.1046	July 7, 1998	Measurements required: RF power output.
2.1049	July 7, 1998	Measurements required: Occupied bandwidth.
2.1051	July 7, 1998	Measurements required: Spurious emissions at antenna terminals.
2.1053	July 7, 1998	Measurements required: Field strength of spurious radiation.
2.1055	Dec. 9, 2003	Measurements required: Frequency stability.
22.355	Oct. 17, 1996	Frequency tolerance.
22.913	Dec. 15, 2004	Effective radiated power limits.
22.917	Dec. 17, 2002	Emission limitations for cellular equipment.
24.232	May 2, 2008	Power and antenna height limits.
24.235/27.54	N/A	Frequency stability.
24.238	Dec. 17, 2002	Emission limitations for Broadband PCS equipment.
27.50	Apr. 7, 1997	Power limits and duty cycle.
27.53	Apr. 7, 1997	Emission limits.

4 KEY TO NOTES AND RESULT CODES


The following are the definition of the test result.

Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
N/T	Test case is not tested.
NTNV	Nominal voltage, Normal Temperature
HV	High voltage, Normal Temperature
LV	Low voltage, Normal Temperature
HTHV	high voltage, High Temperature
LTHV	High voltage, Low Temperature
HTLV	Low voltage, High Temperature
LTLV	Low voltage, Low Temperature

5 RESULT SUMMARY

The following table summarizes the test results obtained.

No.	Test case	FCC reference	Verdict
1	RF Power Output	2.1046	Pass
2	Effective Radiated Power and Effective Isotropic Radiated Power	22.913(a)/24.232(c) /27.50(d)(4)	Pass
3	Occupied Bandwidth	2.1049/27.53(h)(1)	Pass
4	Peak-Average Ratio	27.50(d)(5)	Pass
5	Emission Bandwidth	22.917(b)/24.238(b)	Pass
6	Spurious Emissions at antenna terminals	2.1051/22.917(a)/24.238(a)/ 27.53(h)	Pass
7	Band Edges Compliance	2.1051/22.917(a)/24.238(a)/ 27.53(h)	Pass
8	Frequency Stability	2.1055/22.355/24.235/27.54	Pass
9	Radiated Spurious Emissions	2.1053/22.917(a)/24.238(a)/ 27.53(h), 27.53(g)	Pass

This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Ms. Liu Jia 
Tested by: Mr. Jiang Shuo 	Issued date: 2017.10.25


6 TEST RESULT

6.1 RF Power Output-FCC Part 2.1046

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

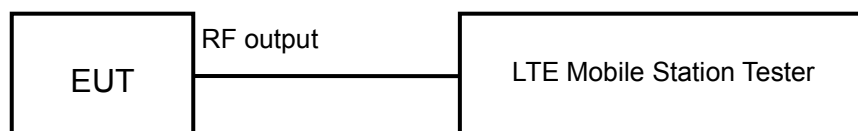

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.


Limits	≤30dBm
--------	--------

6.2 Effective Radiated Power-FCC Part 22.913(a)/24.232(c)/27.50(d)(4)


Ambient condition:

Temperature	Relative humidity	Pressure
20.8°C	36.5%	100.9kPa

Test setup:

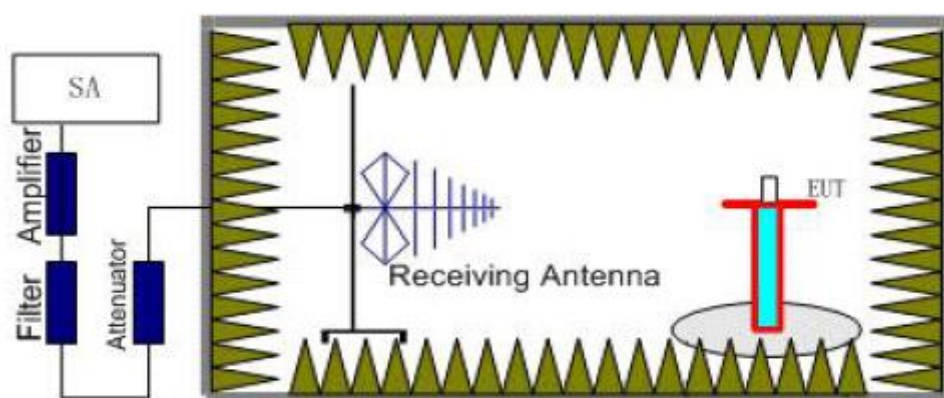

Step 1

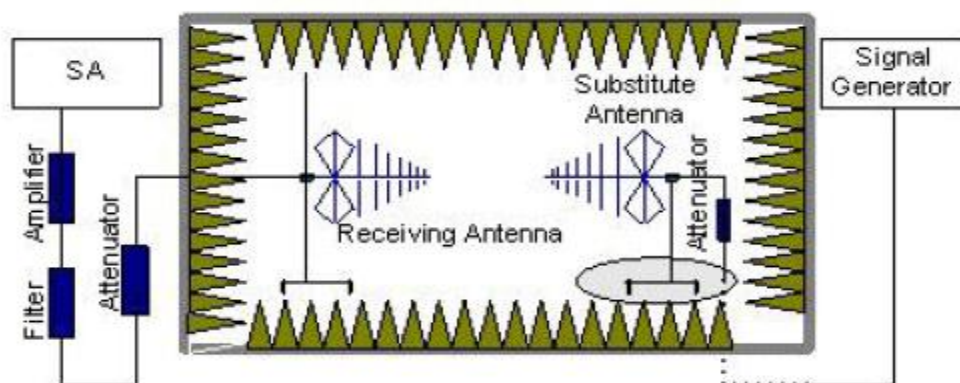

Step 2

Test procedure:

The measurements procedures in TIA-603C-2004 are used.

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meters high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used and RBW is set to 3MHz. Then the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum power value on spectrum analyzer or receiver. And the maximum value of the receiver should be recorded as (Pr).

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator. To repeat the same procedure as step1 and the level of signal generator will be adjusted till the same power value on the spectrum analyzer or receiver. The ERP/EIRP of the EUT can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (Pmea) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (Pmea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A “reference path loss” should be calculated after test. The attenuation of “reference path loss” is the cable loss between the Signal Source with the Substitution Antenna (Pca) and the Substitution Antenna Gain (Ga).

The measurement results are obtained as described below:

Power (EIRP) = Pmea+ Pca+ Ga

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP – 2.15 (dB).


Limits	≤30dBm
--------	--------

6.3 Occupied Bandwidth-FCC Part 2.1049/27.53(h)(1)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

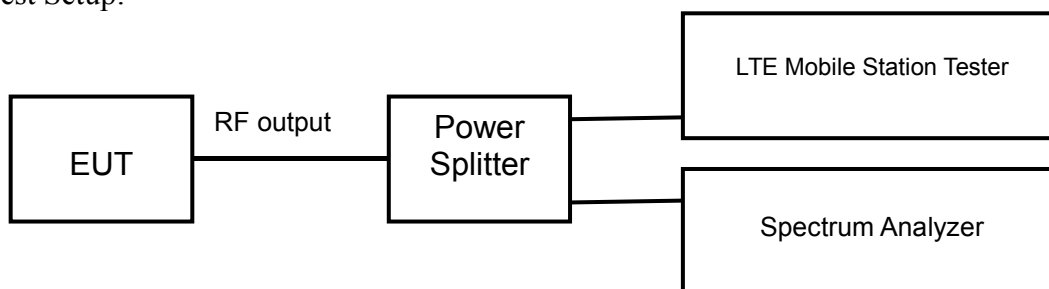

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 30kHz on spectrum analyzer. The bandwidth of 99% power can be read on spectrum analyzer.

The measurement will be conducted at three channels (Bottom, middle and top channels of LTE band)


Limits: No specific occupied bandwidth requirements in part 2.1049

6.4 Emission Bandwidth-FCC Part 22.917(b)/24.238(b)

Ambient condition:

Temperature	Relative humidity	Pressure
23 °C	42%	101.9kPa

Test Setup:

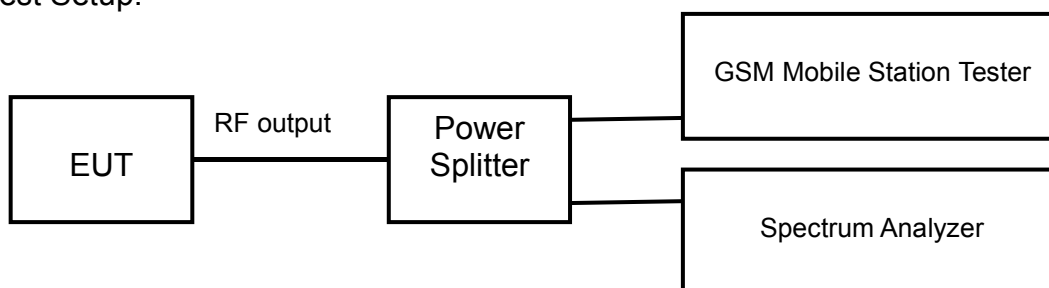

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The emission bandwidth is measured using spectrum analyzer. RBW is set to 3kHz on spectrum analyzer. The bandwidth of -26dB transmitter power can be read on spectrum analyzer.


Limits: No specific emission bandwidth requirements in part 22.917(b)

6.5 Peak-Average Ratio -FCC Part 27.50(d)(5)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

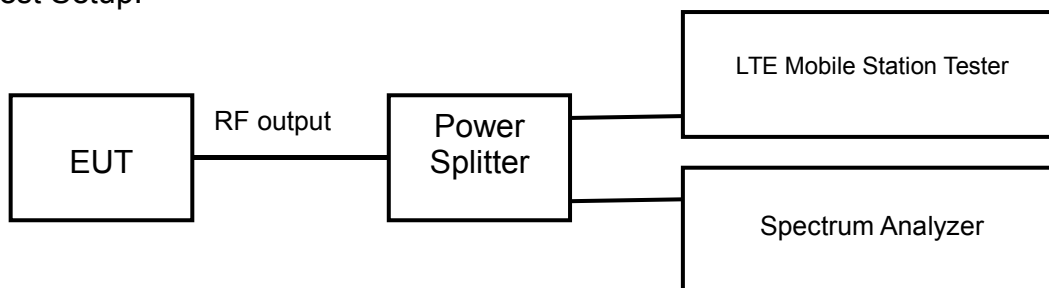

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The Peak-Average Ratio is measured using spectrum analyzer. RBW is set to 30kHz on spectrum analyzer. The Peak-Average Ratio can be read on spectrum analyzer.


Limits	≤13dB
--------	-------

6.6 Spurious Emissions at antenna terminal-FCC Part 2.1051/22.917(a)/24.238(a)/27.53(h)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

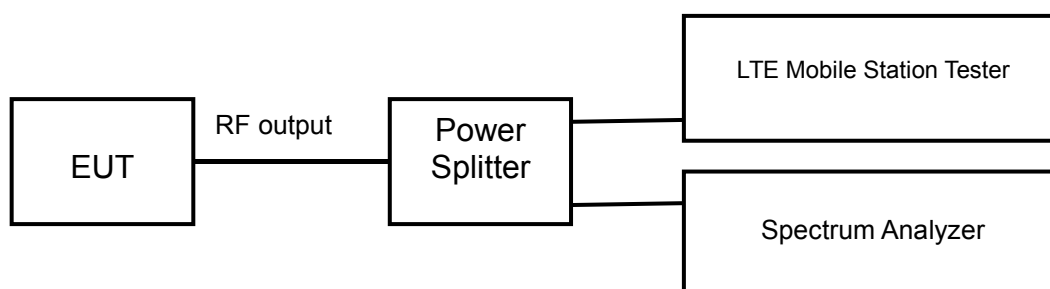

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to 26GHz (higher than the 10th harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer.


Limits	$\leq -13\text{dBm}$
--------	----------------------

6.7 Band Edges Compliance-FCC Part 2.1051/22.917(a)/24.238(a)/27.53(h)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

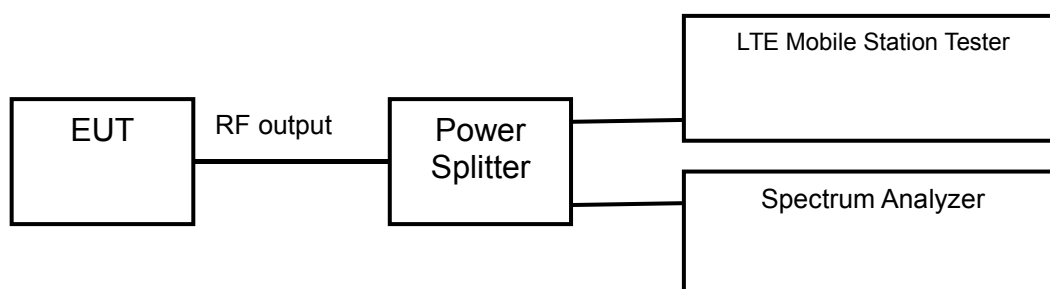

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The peak detector is used and RBW is set to at least 1% of the emission bandwidth on spectrum analyzer.


Limits	≤-13dBm
--------	---------

6.8 Frequency Stability-FCC Part 2.1055/22.355/24.235/27.54

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test setup:

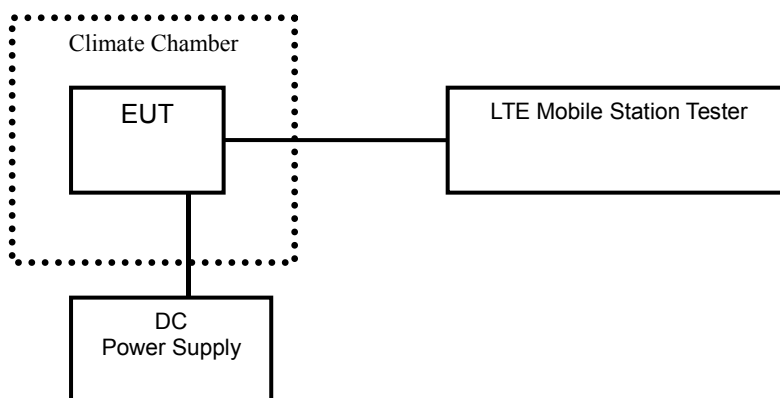

Test Procedure:

A radio link shall be established between EUT and Tester. The tester will sample the transmitter RF output signal and measure its frequency. The temperature inside the climate chamber is varied from -30 to +50°C in 10°C step size, and also the DC power supply voltage to the EUT is varied from LV to HV. The measurement will be conducted at three channels (Bottom, middle and top channels).


Limits: No specific frequency stability requirements in part 2.1055 and part 22.355.

6.9 Radiated Spurious Emissions-FCC Part 2.1053/22.917(a)/24.238(a)/27.53(h), 27.53(g)


Ambient condition:

Temperature	Relative humidity	Pressure
20.8°C	36.5%	100.9kPa

Test Setup:

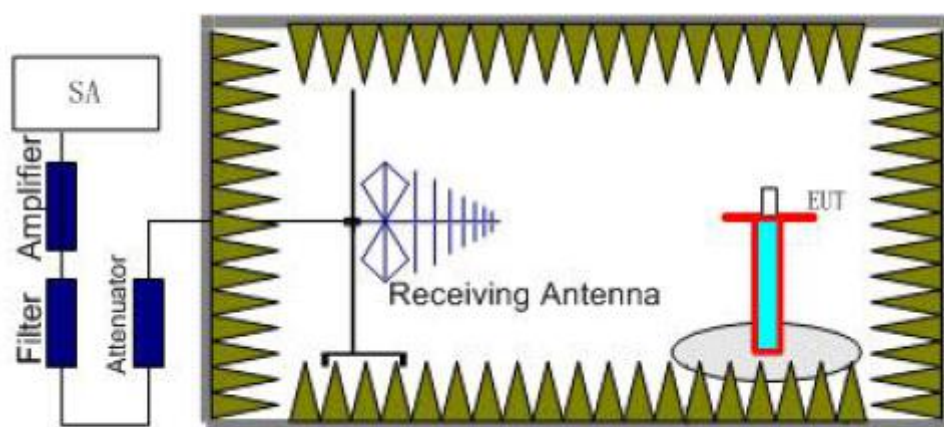

Step 1

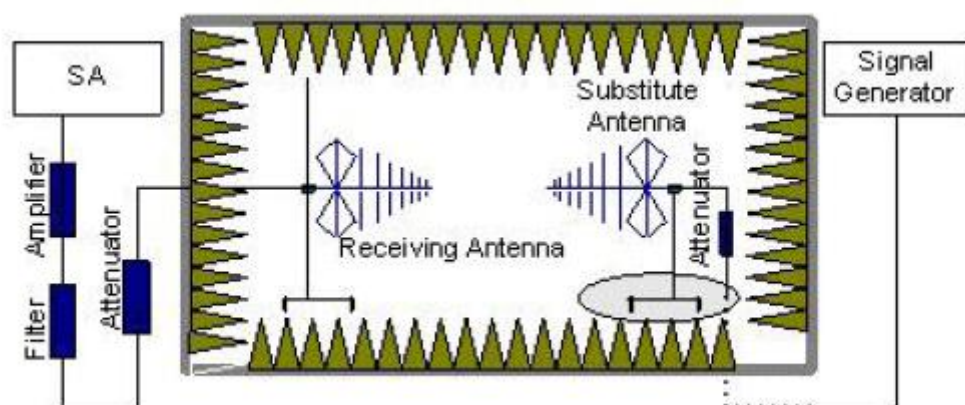

Step 2

Test procedure:

The measurements procedures in TIA-603C-2004 are used.

The spectrum was scanned from 30MHz to the 10th harmonic of the highest frequency generated within the equipment.

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meter high non-conductive table at a 3 meter test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 26GHz (higher than the 10th harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer. Then the antenna height and turn table rotation is adjusted till the maximum power value is founded on spectrum analyzer or receiver. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (P_{mea}) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A “reference path loss” should be calculated after test. The attenuation of “reference path loss” is the cable loss between the Signal Source with the Substitution Antenna (P_{ca}) and the Substitution Antenna Gain (G_a).

Calculation procedure:

The data of cable loss and antenna gain has been calibrated in full testing frequency range before the testing.

The power of the Radiated Spurious Emissions is calculated by adding the cable loss and antenna gain. The basic equation with a sample calculation is as followed:

$$\text{Power(EIRP)} = P_{mea} + P_{ca} + G_a$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15 \text{ (dB)}$.

Assumed the power of signal source record is -20dBm. A cable loss of -30dB, and an antenna gain of 11dB are added.

$$P=P_{mea}+P_{ca}+G_a=(-20\text{dBm})+(-30\text{dB})+(11\text{dB})=-39\text{dBm}$$

7 MEASUREMENT UNCERTAINTIES

Items	Uncertainty	
RF Power Output	U=0.6 dB	
Occupied Bandwidth	3kHz	
Spurious Emissions	9kHz~2GHz	U=1.2dB
	2G~3.6GHz	U=1.4dB
	3.6G~8GHz	U=2.2dB
	8G~12.75GHz	U=2.7dB
Band Edges Compliance	1.2dB	
Frequency Stability	U=48 Hz	

8 TEST EQUIPMENTS

No.	Name/Model	Manufacturer	Serial Number	Calibration Due Date
1	Mobile Station Tester	SP8010B	E0095	2017.09.24
2	N9020A Spectrum Analyzer	Agilent	MY48010771	2017.08.20
3	DC Power Supply E3645A	Agilent	MY43007648	2017.08.20
4	Power Splitter 11850C	Agilent	19632	2017.08.20
5	Temperature chamber SH241	ESPEC	92013758	2017.08.20
6	12.65m×8.03m×7.50m Fully-Anechoic Chamber	FRANKONIA	-----	-----
7	Turn table Diameter: 1m	HD	-----	-----
8	Antenna master FAC(MA4.0)	MATURO	-----	-----
9	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100030	2017.08.20
10	HL562 Ultra log antenna	R&S	100016	2017.08.20
11	3160-09 Receive antenna	SCHWARZ-BECK	002058-002	2017.08.20
12	ESI 40 EMI test receiver	R&S	100015	2017.08.20
13	Radio tester	CMU 200	114667	2017.08.20
14	Spectrum Analyzer	FSV40	101065	2017.08.20

APPENDIX A – TEST DATA OF CONDUCTED EMISSION

Please refer to the attachment.

APPENDIX B – TEST DATA OF RADIATED EMISSION

Please refer to the attachment.

APPENDIX C – TEST SETUP

Please refer to the attachment.

APPENDIX A – TEST DATA OF CONDUCTED EMISSION

Appendix Test Setup

1 RF Power Output-FCC Part 2.1046

Test result:

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
2	1850.7	18607	1.4	1	0	20.8	19.7
				1	5	20.7	19.7
				3	2	20.5	20.0
				6	0	19.6	18.7

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
2	1880	18900	1.4	1	0	20.5	19.7
				1	5	20.6	19.7
				3	2	20.7	19.6
				6	0	19.5	18.6

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
2	1909.3	19193	1.4	1	0	20.7	19.7
				1	5	20.8	19.7
				3	2	20.7	19.7
				6	0	19.7	18.5

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
2	1851.5	18615	3	1	0	20.8	20.2
				1	14	20.6	20.2
				8	4	19.8	19.0
				15	0	19.7	18.9

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
2	1880	18900	3	1	0	20.5	19.7
				1	14	20.6	19.6
				8	4	19.6	18.6
				15	0	19.6	18.0

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
2	1908.5	19185	3	1	0	20.7	19.8
				1	14	20.8	19.7
				8	4	19.8	18.7
				15	0	19.7	18.7

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
2	1852.5	18625	5	1	0	20.9	19.7
				1	24	20.7	19.7
				12	6	19.8	18.9
				25	0	19.7	18.8

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
2	1880	18900	5	1	0	20.6	19.9
				1	24	20.6	19.8
				12	6	19.6	18.8
				25	0	19.6	18.7

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
2	1907.5	19175	5	1	0	20.7	19.7
				1	24	20.8	19.7
				12	6	19.7	18.7
				25	0	19.7	18.7

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
2	1855	18650	10	1	0	21.0	20.3
				1	49	20.6	20.3
				24	12	19.7	18.8
				50	0	19.7	18.8

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
2	1880	18900	10	1	0	20.6	19.8

				1	49	20.6	19.7
				24	12	19.6	18.7
				50	0	19.6	18.7

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
2	1905	19150	10	1	0	20.7	19.8
				1	49	20.8	19.8
				24	12	19.7	18.7
				50	0	19.7	18.7

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
2	1857.5	18675	15	1	0	21.1	20.4
				1	74	20.7	20.3
				40	18	19.7	18.9
				75	0	19.9	18.9

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
2	1880	18900	15	1	0	20.7	19.9
				1	74	20.7	19.8
				40	18	19.6	18.7
				75	0	19.8	18.8

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
2	1902.5	19125	15	1	0	20.7	20.1
				1	74	20.9	20.1
				40	18	19.7	18.7
				75	0	19.8	18.7

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
2	1860	18700	20	1	0	21.1	20.3
				1	99	20.8	20.0
				50	25	19.8	18.8
				100	0	19.8	18.9

Band	Carrier	Channel	BW	RB	RB	RF Power Output	
------	---------	---------	----	----	----	-----------------	--

	frequency (MHz)	(Mid)		Size	Offset	(dBm)	
						QPSK	16-QAM
2	1880	18900	20	1	0	20.9	20.1
				1	99	20.8	19.9
				50	25	19.6	18.7
				100	0	19.7	18.7

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
2	1900	19100	20	1	0	20.6	20.2
				1	99	20.8	20.2
				50	25	19.7	18.6
				100	0	19.6	18.6

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
4	1710.7	19957	1.4	1	0	20.8	19.9
				1	5	20.8	19.9
				3	2	20.8	19.6
				6	0	19.8	18.7

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
4	1732.5	20175	1.4	1	0	20.8	19.9
				1	5	20.7	19.9
				3	2	20.8	19.8
				6	0	19.8	18.8

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
4	1754.3	20393	1.4	1	0	20.2	19.2
				1	5	20.1	19.2
				3	2	20.1	19.2
				6	0	19.1	17.9

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
4	1711.5	19965	3	1	0	20.1	19.9

				1	14	20.2	19.8
				8	4	19.3	18.5
				15	0	19.3	18.3

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
4	1732.5	20175	3	1	0	20.2	19.3
				1	14	20.1	19.3
				8	4	19.2	18.2
				15	0	19.2	18.1

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
4	1753.5	20385	3	1	0	20.7	19.8
				1	14	20.5	19.8
				8	4	19.8	18.8
				15	0	19.7	18.8

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
4	1712.5	19975	5	1	0	20.9	19.9
				1	24	20.8	19.9
				12	6	19.9	18.9
				25	0	19.9	18.9

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
4	1732.5	20175	5	1	0	20.9	20.2
				1	24	20.8	20.1
				12	6	19.9	18.9
				25	0	19.9	18.8

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
4	1752.5	20375	5	1	0	20.8	19.8
				1	24	20.7	19.8
				12	6	19.8	18.7
				25	0	19.7	18.7

Band	Carrier	Channel	BW	RB	RB	RF Power Output	
------	---------	---------	----	----	----	-----------------	--

	frequency (MHz)	(Low)		Size	Offset	(dBm)	
						QPSK	16-QAM
4	1715	20000	10	1	0	20.9	20.7
				1	49	20.9	20.5
				24	12	20.0	19.0
				50	0	20.0	18.9

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
4	1732.5	20175	10	1	0	21.0	20.1
				1	49	20.9	20.1
				24	12	19.9	19.0
				50	0	19.9	18.9

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
4	1750	20350	10	1	0	20.9	20.0
				1	49	20.7	19.8
				24	12	19.8	18.7
				50	0	19.8	18.8

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
4	1717.5	20025	15	1	0	21.0	20.7
				1	74	20.9	20.5
				40	18	19.9	19.0
				75	0	20.0	19.0

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
4	1732.5	20175	15	1	0	21.0	20.1
				1	74	20.9	20.1
				40	18	19.9	19.0
				75	0	20.0	18.9

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
4	1747.5	20325	15	1	0	20.9	20.5

				1	74	20.8	20.2
				40	18	19.8	18.8
				75	0	19.9	18.8

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
4	1720	20050	20	1	0	21.1	20.3
				1	99	20.7	20.2
				50	25	19.9	18.9
				100	0	20.0	19.0

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
4	1732.5	20175	20	1	0	21.1	20.2
				1	99	21.0	20.2
				50	25	19.9	18.9
				100	0	19.9	18.9

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
4	1745	20300	20	1	0	20.9	20.6
				1	99	20.7	20.3
				50	25	19.8	18.8
				100	0	19.8	18.8

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
5	824.7	20407	1.4	1	0	22.5	18.6
				1	5	19.5	18.6
				3	2	19.6	18.8
				6	0	18.5	17.6

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
5	836.5	20525	1.4	1	0	19.5	18.6
				1	5	19.5	18.6
				3	2	19.6	18.5
				6	0	18.5	17.5

Band	Carrier	Channel	BW	RB	RB	RF Power Output	
------	---------	---------	----	----	----	-----------------	--

	frequency (MHz)	(High)		Size	Offset	(dBm)	
						QPSK	16-QAM
5	848.3	20643	1.4	1	0	19.5	18.7
				1	5	19.6	18.7
				3	2	19.7	18.7
				6	0	18.5	17.4

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
5	825.5	20415	3	1	0	19.5	19.0
				1	14	19.4	19.0
				8	4	18.5	17.7
				15	0	18.5	17.6

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
5	836.5	20525	3	1	0	19.4	18.6
				1	14	19.5	18.6
				8	4	18.5	17.4
				15	0	18.4	17.4

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
5	847.5	20635	3	1	0	19.5	18.6
				1	14	19.5	18.6
				8	4	18.6	17.6
				15	0	18.5	17.6

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
5	826.5	20425	5	1	0	19.6	18.5
				1	24	19.5	18.4
				12	6	18.5	17.5
				25	0	18.4	17.6

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
5	836.5	20525	5	1	0	19.5	18.8

				1	24	19.5	18.7
				12	6	18.5	17.5
				25	0	18.4	17.4

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
5	846.5	20625	5	1	0	19.6	18.6
				1	24	19.5	18.6
				12	6	18.6	17.5
				25	0	18.5	17.5

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
5	829	20450	10	1	0	19.6	19.1
				1	49	19.4	19.1
				24	12	18.5	17.6
				50	0	18.5	17.6

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
5	836.5	20525	10	1	0	19.6	18.7
				1	49	19.5	18.6
				24	12	18.5	17.6
				50	0	18.5	17.5

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
5	844	20600	10	1	0	19.6	18.6
				1	49	19.5	18.6
				24	12	18.5	17.5
				50	0	18.5	17.5

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
7	2502.5	20775	5	1	0	17.3	19.1
				1	24	19.8	18.8
				12	6	18.9	17.9
				25	0	18.9	17.9

Band	Carrier	Channel	BW	RB	RB	RF Power Output	
------	---------	---------	----	----	----	-----------------	--

	frequency (MHz)	(Mid)		Size	Offset	(dBm)	
						QPSK	16-QAM
7	2535	21100	5	1	0	20.0	19.2
				1	24	19.9	19.1
				12	6	18.9	17.9
				25	0	18.9	17.9

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
7	2567.5	21425	5	1	0	19.6	18.8
				1	24	19.5	18.5
				12	6	18.5	17.5
				25	0	18.5	17.5

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
7	2505	20800	10	1	0	20.1	19.6
				1	49	19.6	19.2
				24	12	18.7	17.8
				50	0	18.8	17.8

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
7	2535	21100	10	1	0	20.0	19.1
				1	49	19.9	19.0
				24	12	18.9	17.9
				50	0	18.9	17.9

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
7	2565	21400	10	1	0	19.8	19.0
				1	49	19.5	18.5
				24	12	18.6	17.5
				50	0	18.7	17.7

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
7	2507.5	20825	15	1	0	20.3	19.9

				1	74	19.8	19.3
				40	18	18.8	17.8
				75	0	19.1	18.0

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
7	2535	21100	15	1	0	20.0	19.0
				1	74	19.8	18.9
				40	18	18.8	17.9
				75	0	18.9	17.9

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
7	2562.5	21375	15	1	0	19.6	19.1
				1	74	19.2	18.6
				40	18	18.3	17.3
				75	0	18.5	17.4

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
7	2510	20850	20	1	0	20.4	19.6
				1	99	20.0	19.3
				50	25	18.8	17.7
				100	0	18.9	17.9

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
7	2535	21100	20	1	0	19.9	19.0
				1	99	19.8	19.0
				50	25	18.8	17.8
				100	0	18.8	17.8

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	RF Power Output (dBm)	
						QPSK	16-QAM
7	2560	21350	20	1	0	19.6	19.2
				1	99	19.2	18.7
				50	25	18.4	17.4
				100	0	18.5	17.4

Band	Carrier	Channel	BW	RB	RB	RF Power Output	
------	---------	---------	----	----	----	-----------------	--

	frequency (MHz)	(High)		Size	Offset	(dBm)	
						QPSK	16-QAM
7	2560	21350	20	1	0	19.6	19.2
				1	99	19.2	18.7
				50	25	18.4	17.4
				100	0	18.5	17.4

2 Occupied Bandwidth-FCC Part 2.1049/27.53(h)(1)

Test result

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	Bandwidth of 99% Power (MHz)			
						QPSK		16-QAM	
2	1850.7	18607	1.4	1	0	0.207	Fig.1	0.219	Fig.5
				1	5	0.213	Fig.2	0.219	Fig.6
				3	2	0.577	Fig.3	0.584	Fig.7
				6	0	1.094	Fig.4	1.100	Fig.8



Fig.1

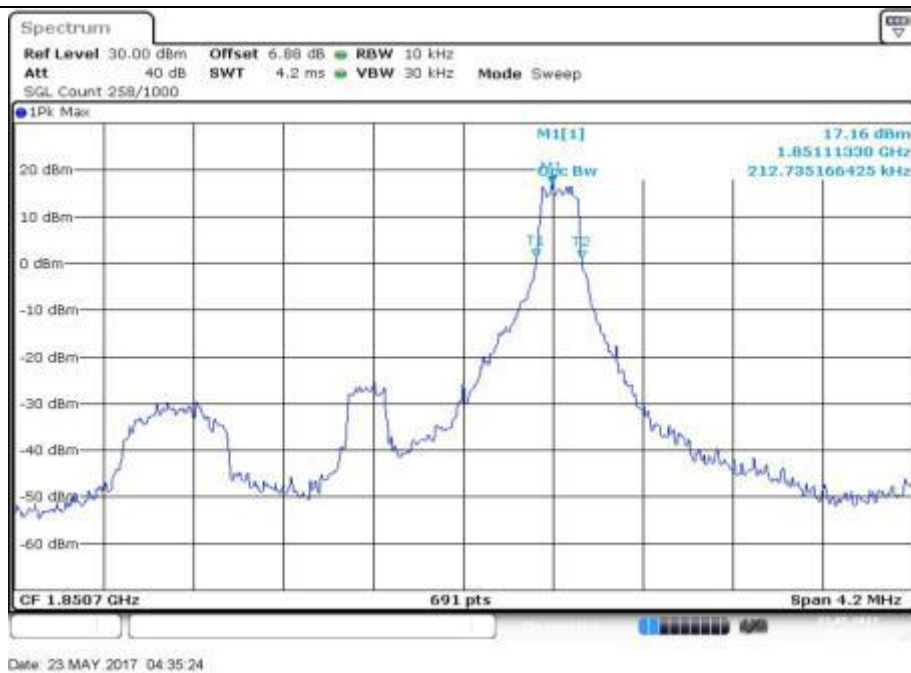


Fig.2



Fig.3



Fig.4



Fig.5



Fig.6



Fig.7

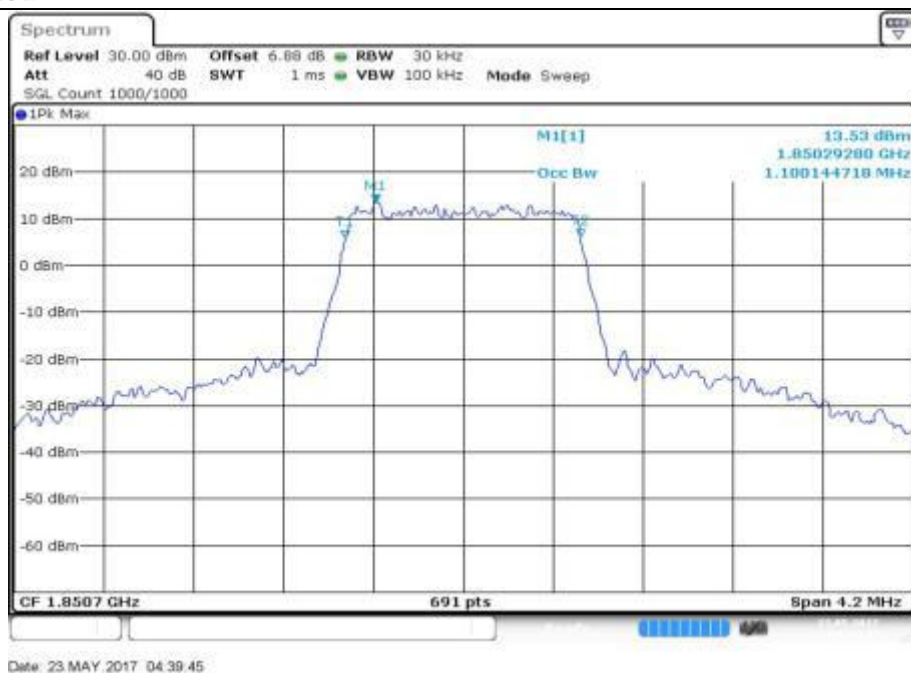


Fig.8

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	Bandwidth of 99% Power (MHz)			
						QPSK		16-QAM	
2	1880	18900	1.4	1	0	0.225	Fig.1	0.213	Fig.5
				1	5	0.219	Fig.2	0.219	Fig.6
				3	2	0.571	Fig.3	0.577	Fig.7
				6	0	1.100	Fig.4	1.088	Fig.8



Fig.1



Fig.2



Fig.3



Fig.4



Fig.5



Fig.6

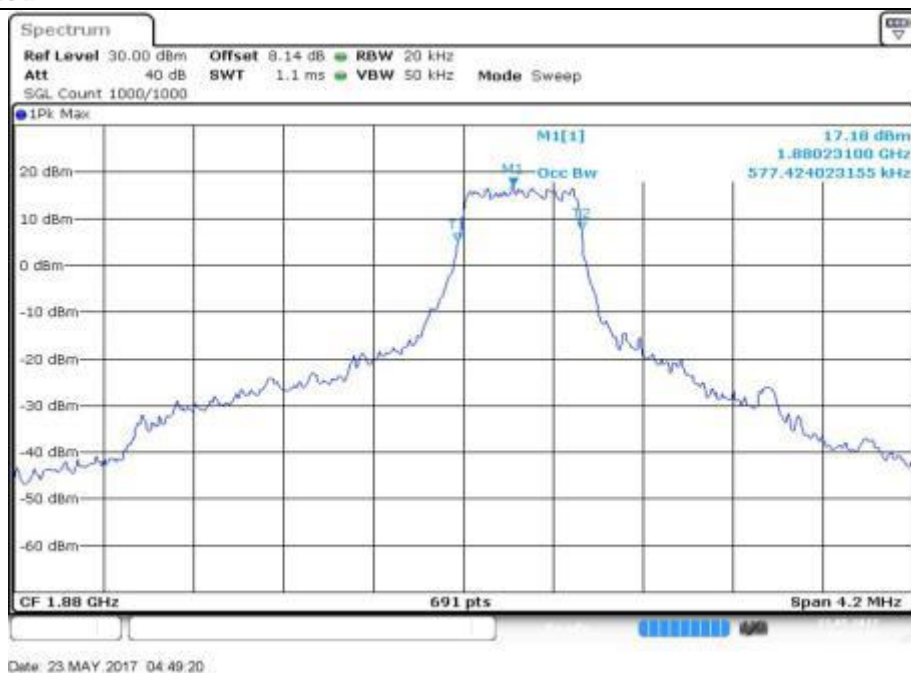


Fig.7

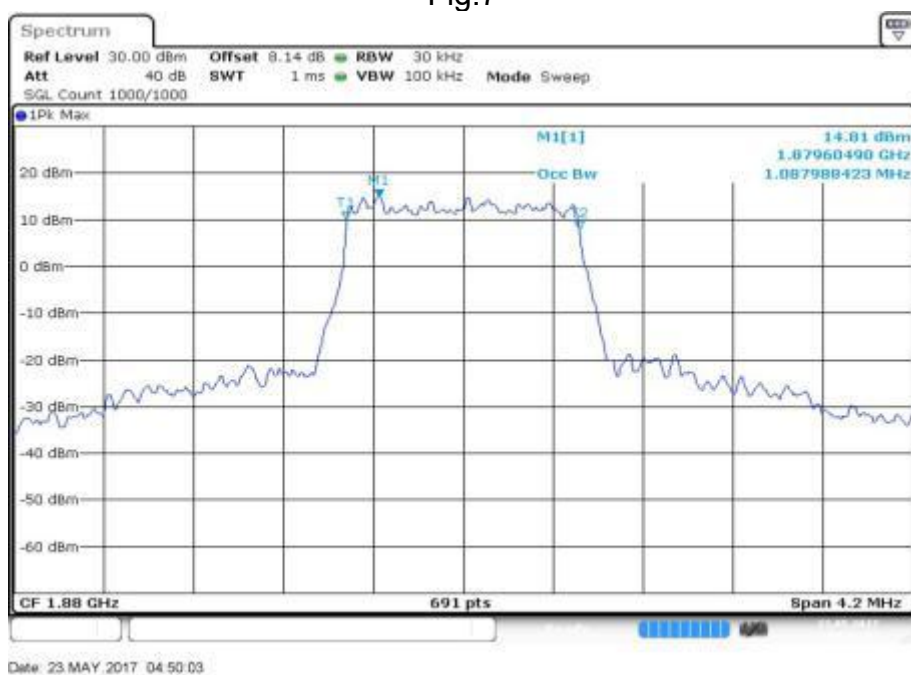


Fig.8

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	Bandwidth of 99% Power (MHz)			
						QPSK		16-QAM	
2	1909.3	19193	1.4	1	0	0.213	Fig.1	0.219	Fig.5
				1	5	0.219	Fig.2	0.225	Fig.6
				3	2	0.577	Fig.3	0.571	Fig.7
				6	0	1.106	Fig.4	1.094	Fig.8



Fig.1



Fig.2



Fig.3

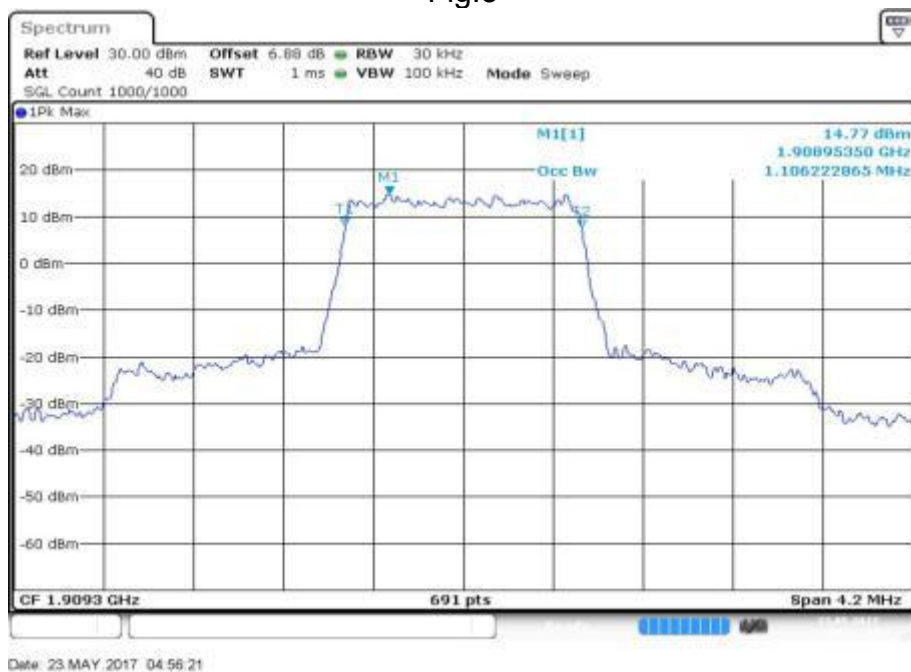


Fig.4



Fig.5



Fig.6

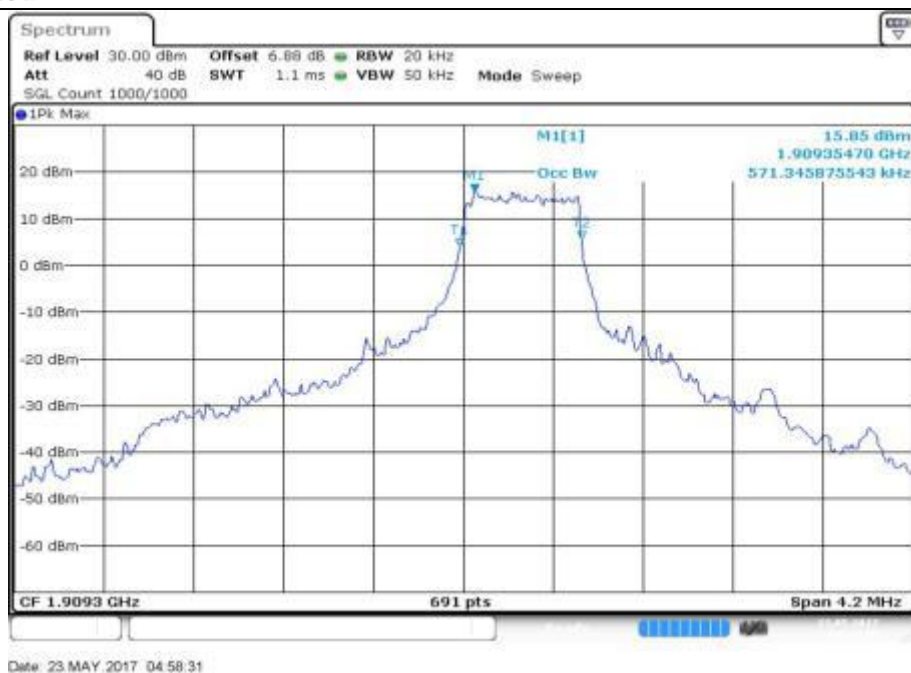


Fig.7

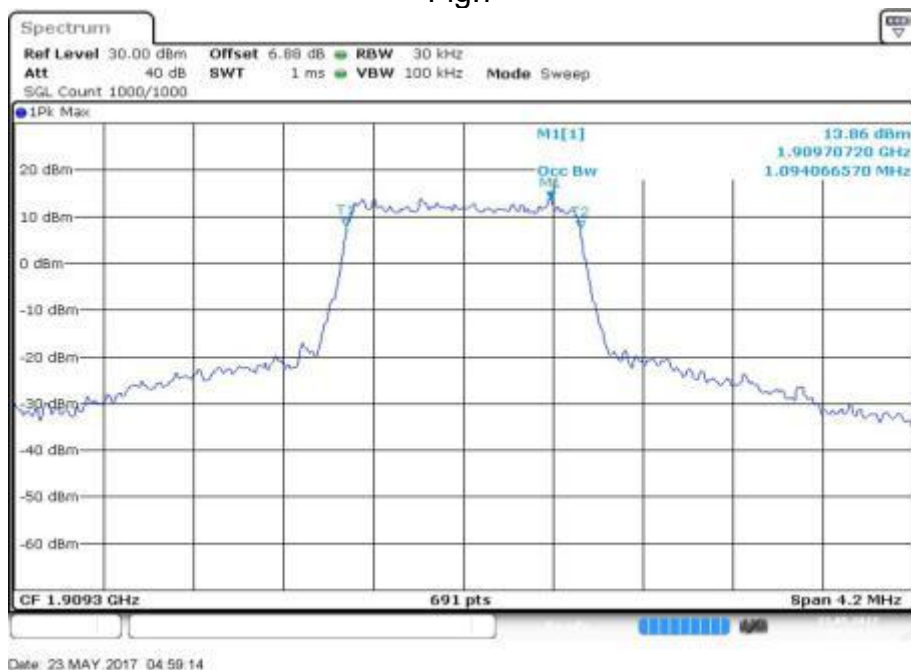


Fig.8

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	Bandwidth of 99% Power (MHz)			
						QPSK		16-QAM	
2	1851.5	18615	3	1	0	0.221	Fig.1	0.221	Fig.5
				1	14	0.221	Fig.2	0.221	Fig.6
				8	4	1.459	Fig.3	1.459	Fig.7
				15	0	2.735	Fig.4	2.748	Fig.8

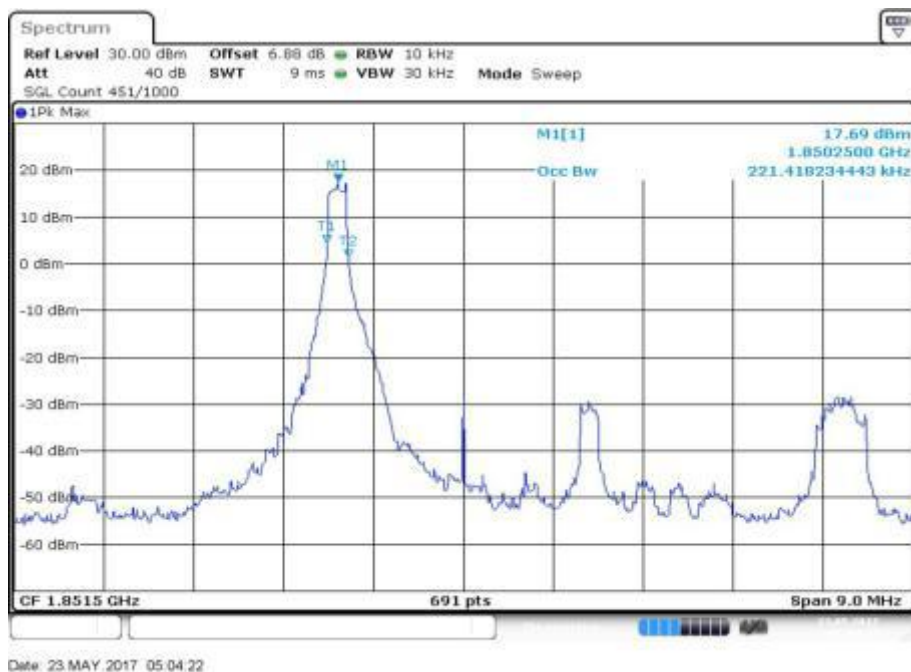


Fig.1

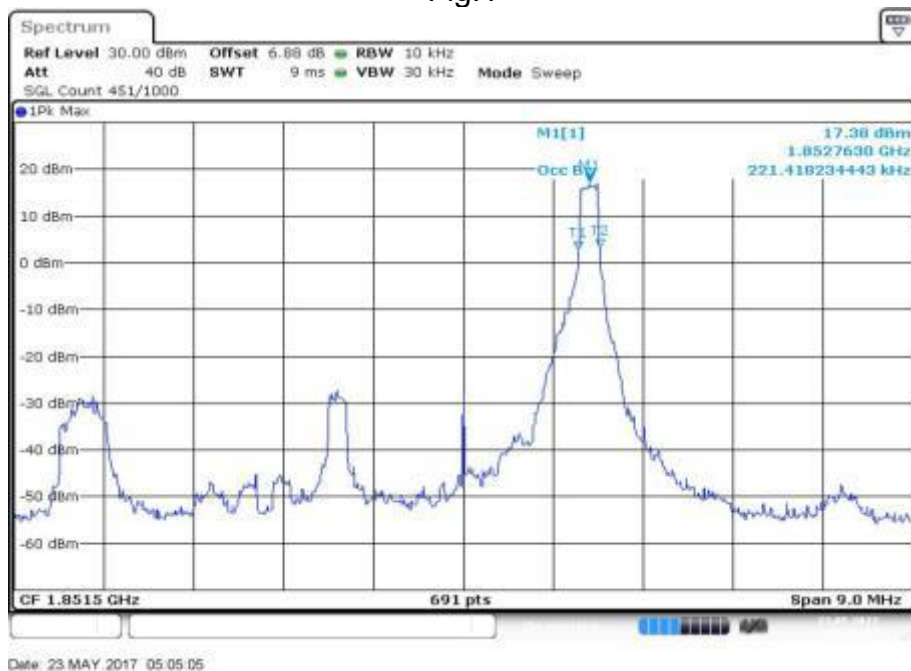


Fig.2

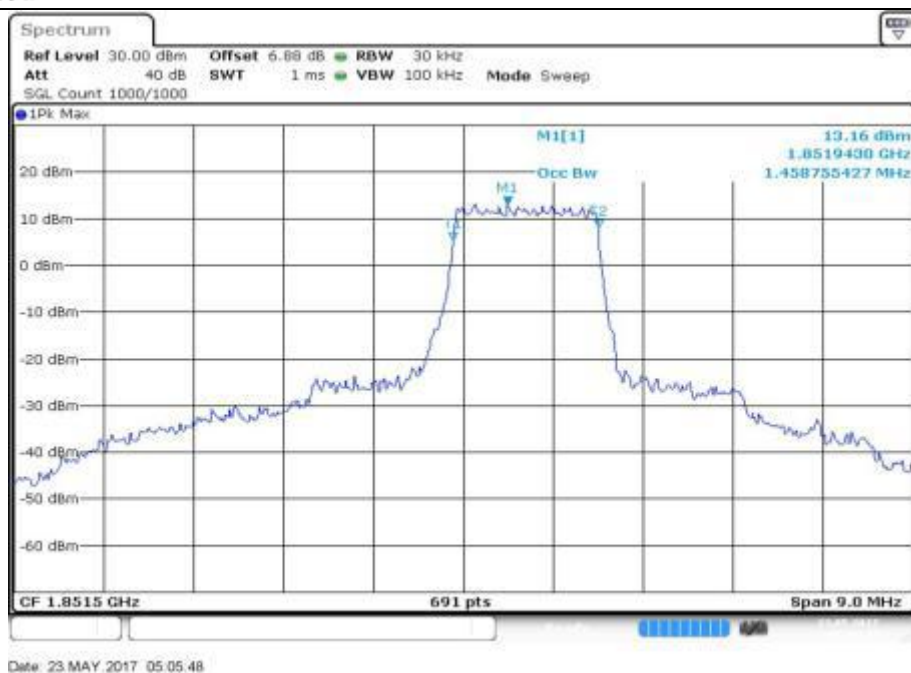


Fig.3

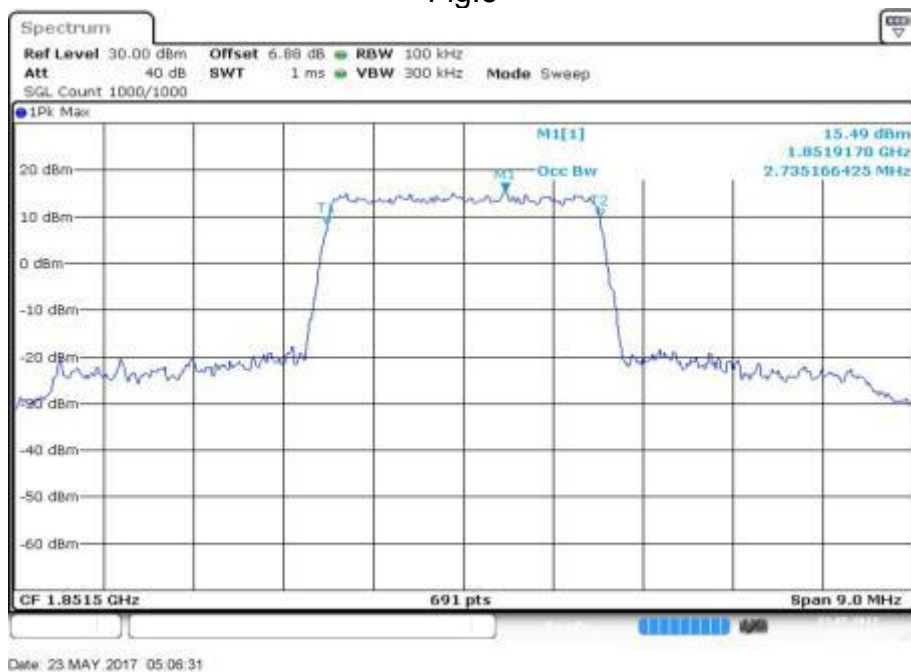


Fig.4

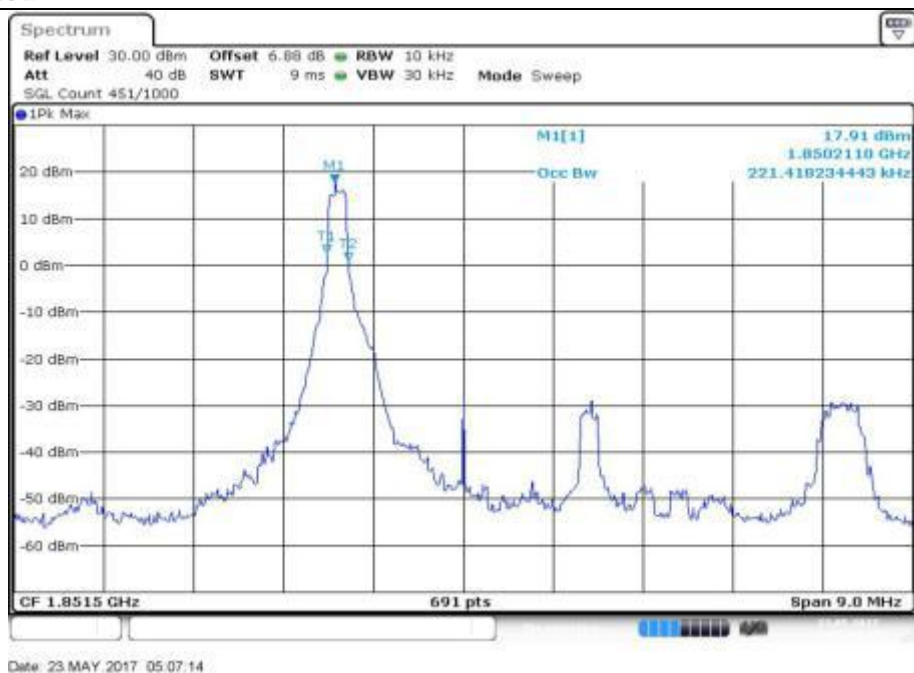


Fig.5

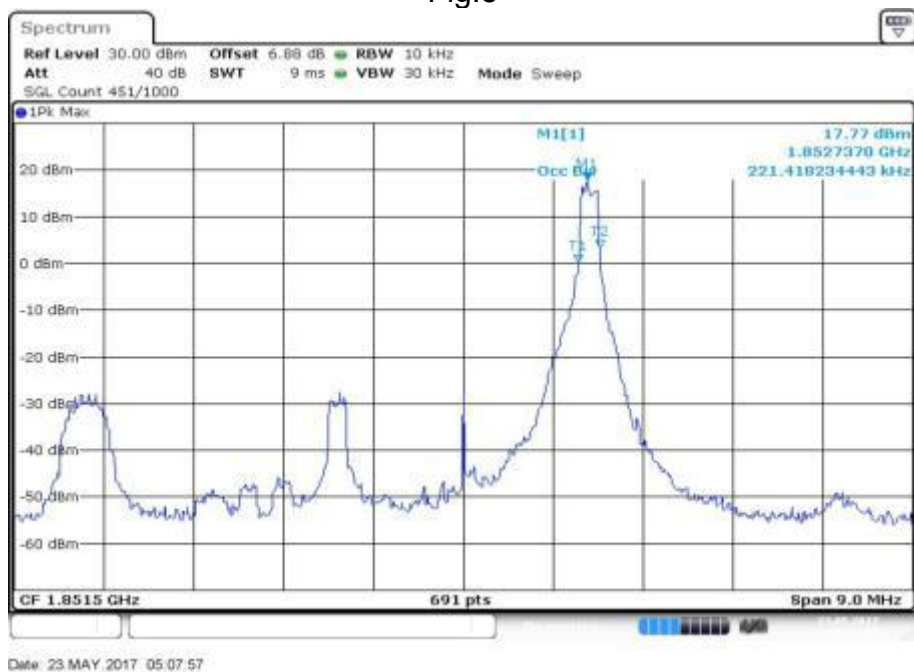


Fig.6

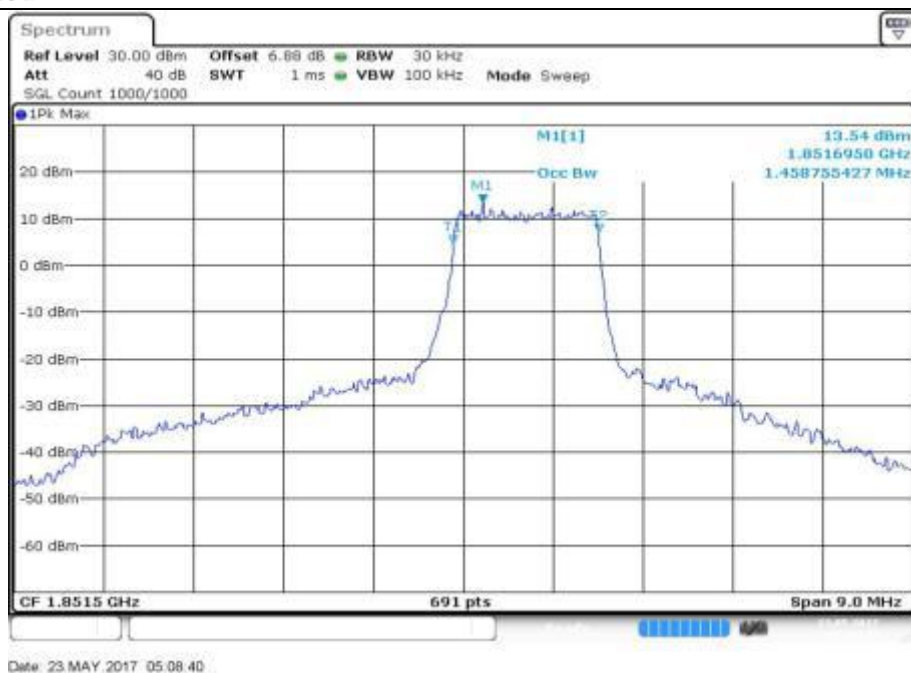


Fig.7

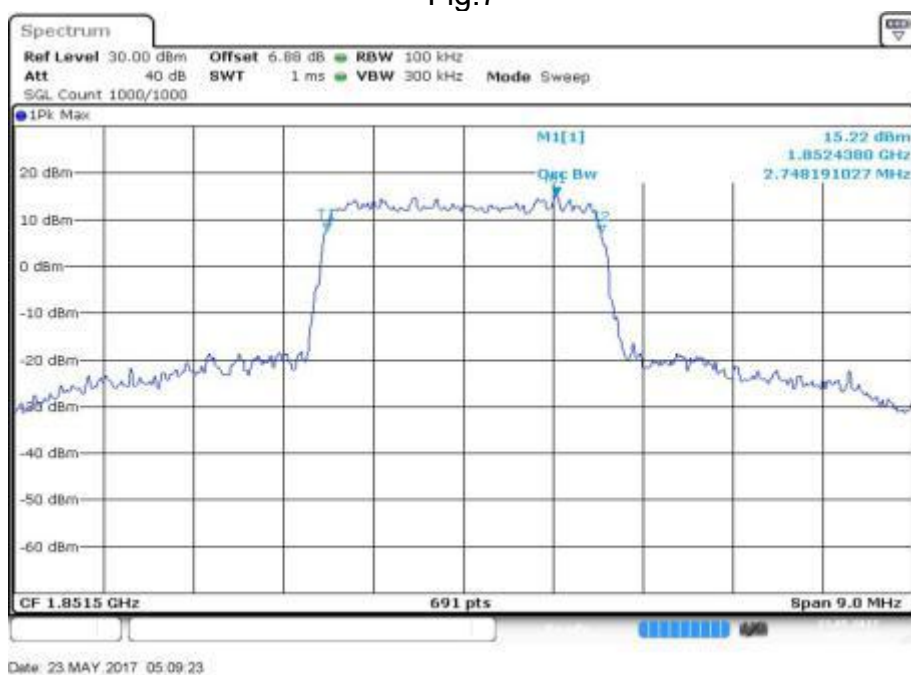


Fig.8

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	Bandwidth of 99% Power (MHz)			
						QPSK		16-QAM	
2	1880	18900	3	1	0	0.221	Fig.1	0.234	Fig.5
				1	14	0.221	Fig.2	0.221	Fig.6
				8	4	1.446	Fig.3	1.459	Fig.7
				15	0	2.735	Fig.4	2.735	Fig.8

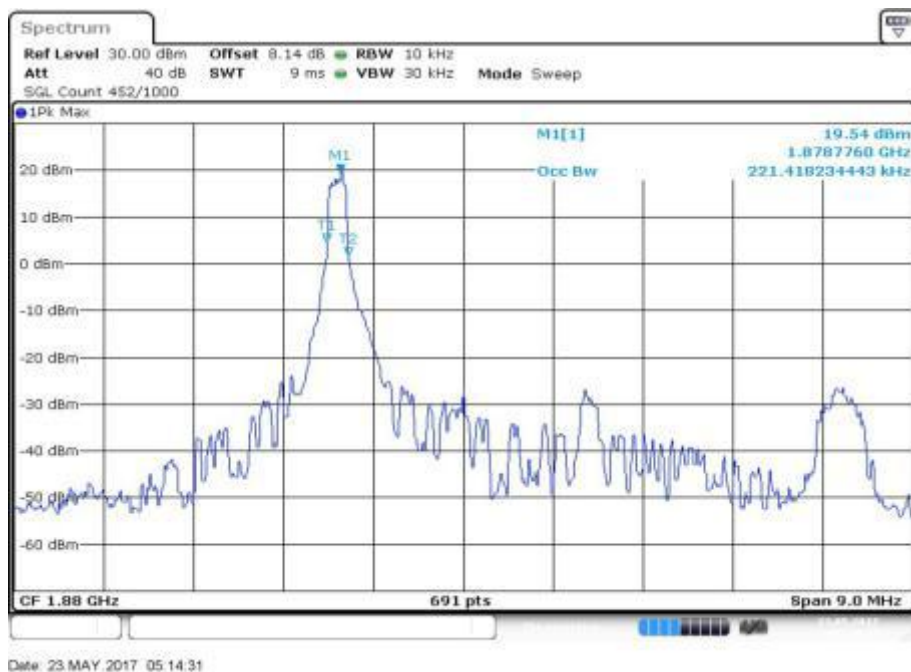


Fig.1

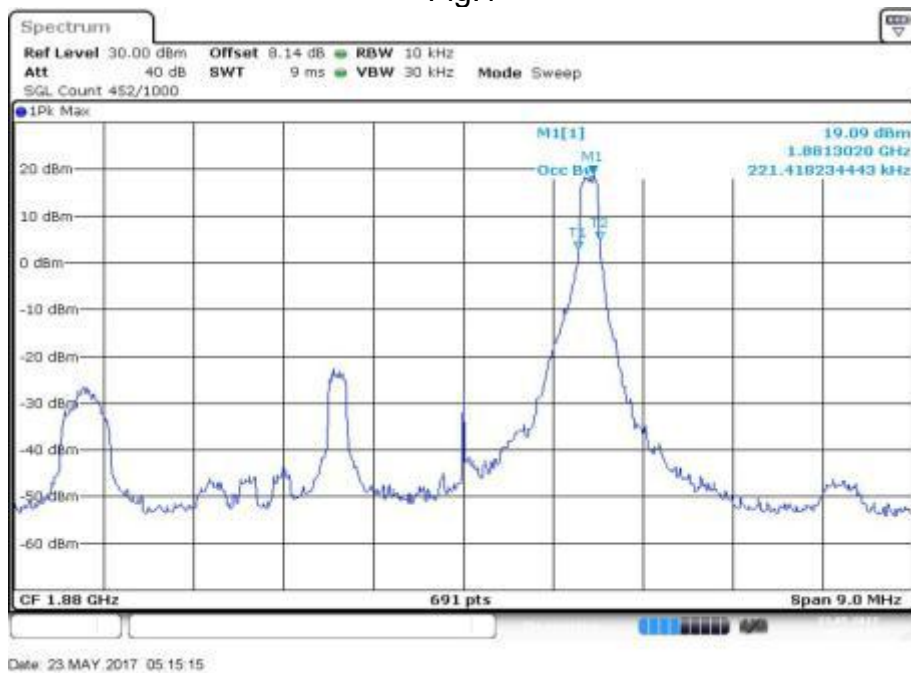


Fig.2

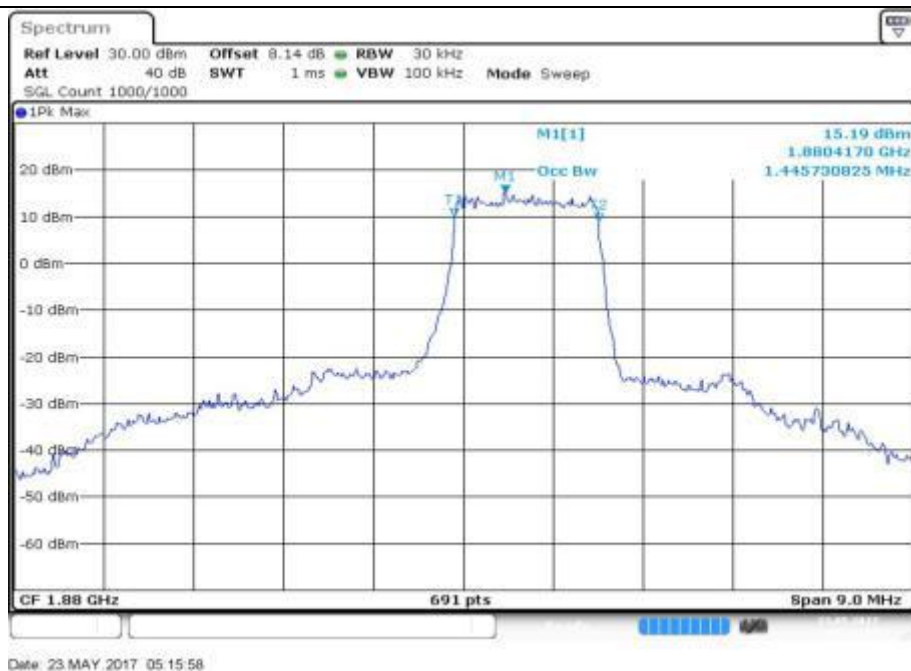


Fig.3



Fig.4

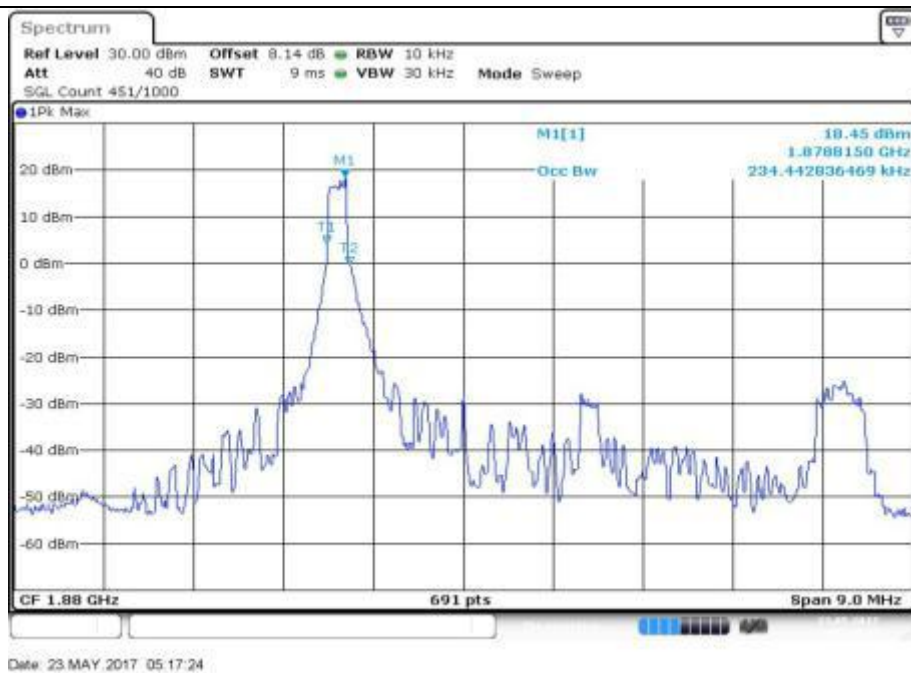


Fig.5

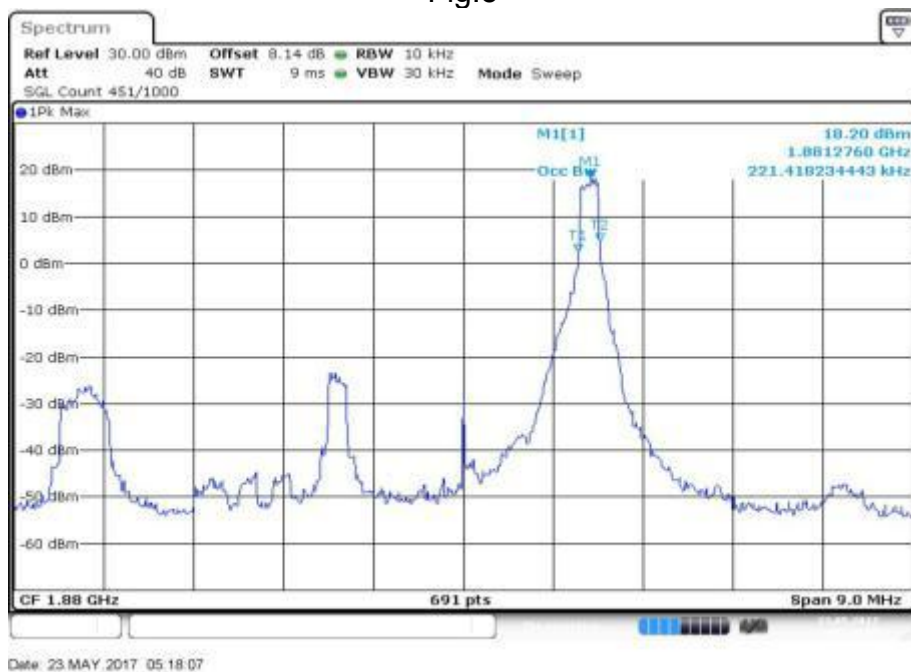


Fig.6

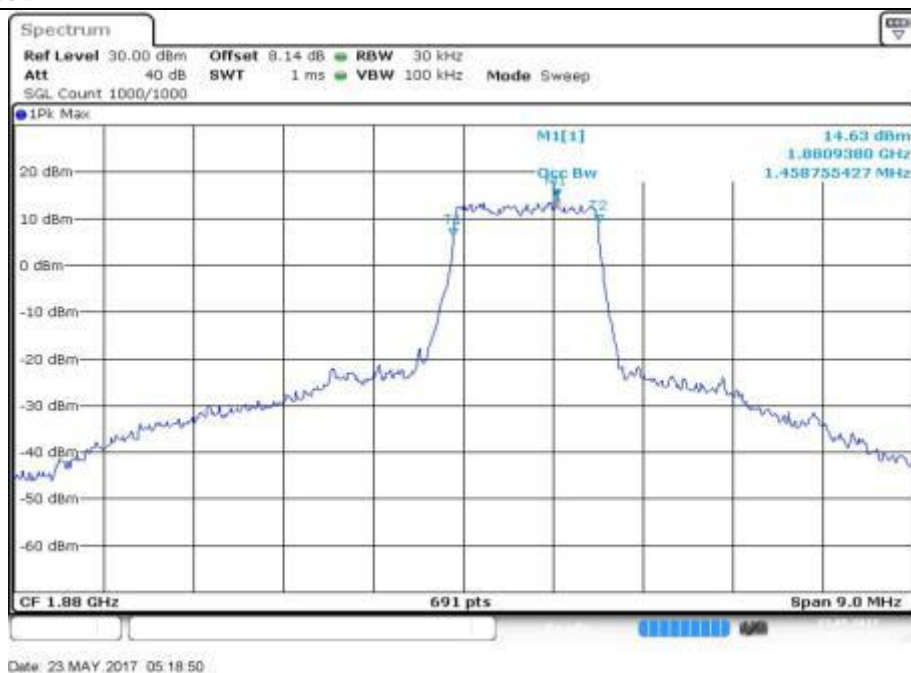


Fig.7

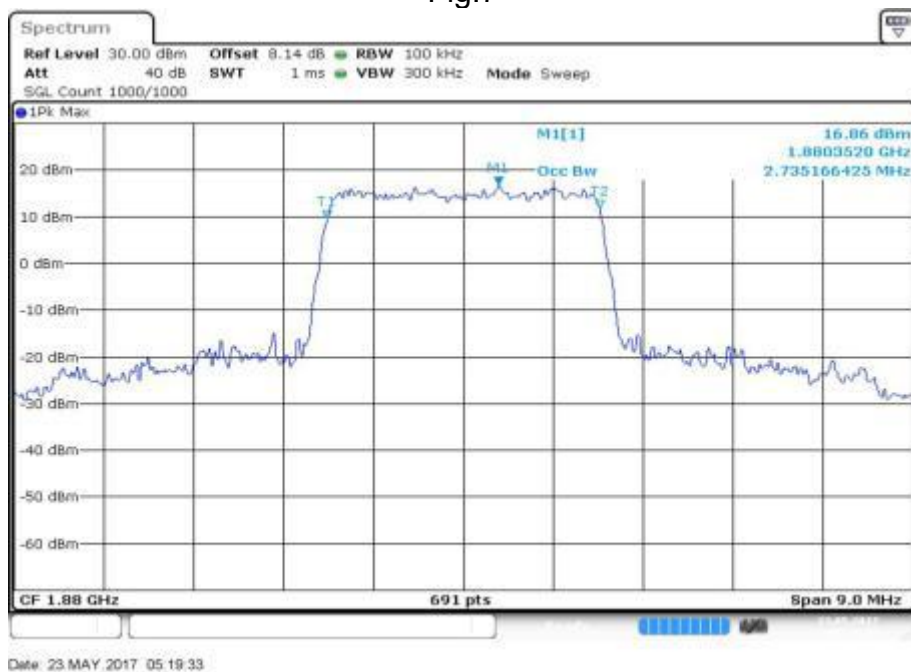


Fig.8

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	Bandwidth of 99% Power (MHz)			
						QPSK		16-QAM	
2	1908.5	19185	3	1	0	0.221	Fig.1	0.221	Fig.5
				1	14	0.234	Fig.2	0.234	Fig.6
				8	4	1.459	Fig.3	1.459	Fig.7
				15	0	2.735	Fig.4	2.748	Fig.8

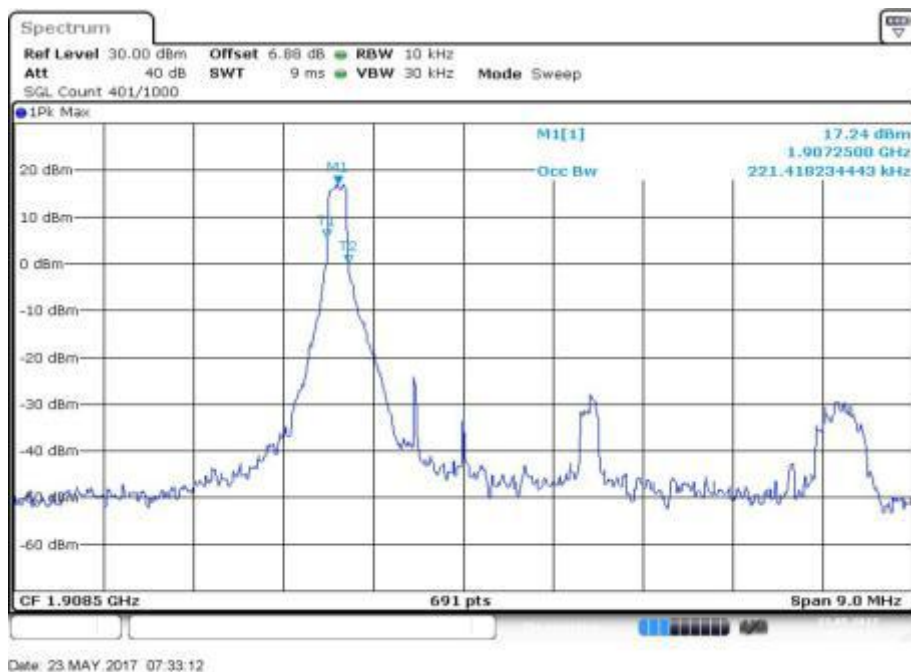


Fig.1

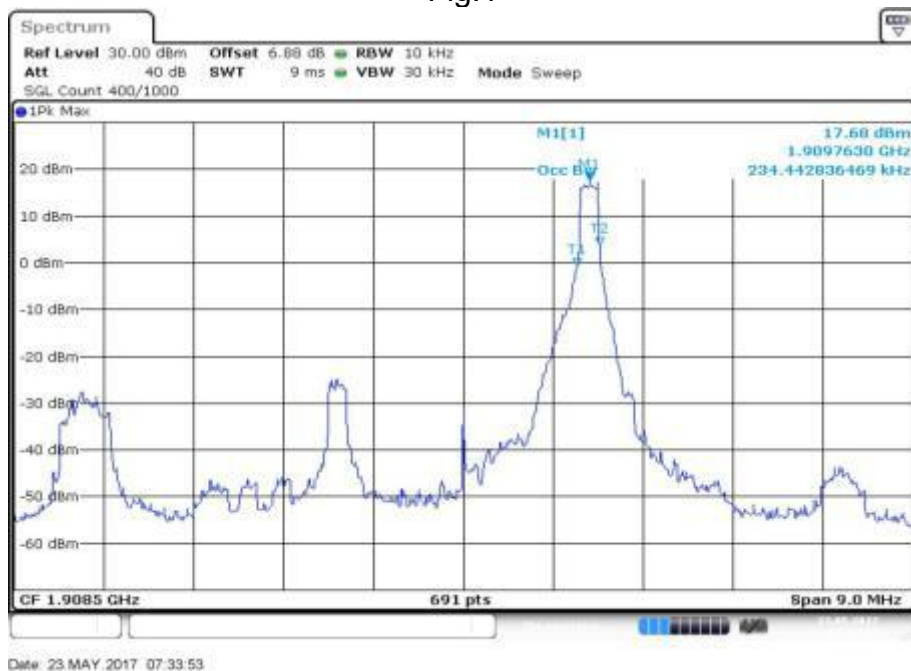


Fig.2

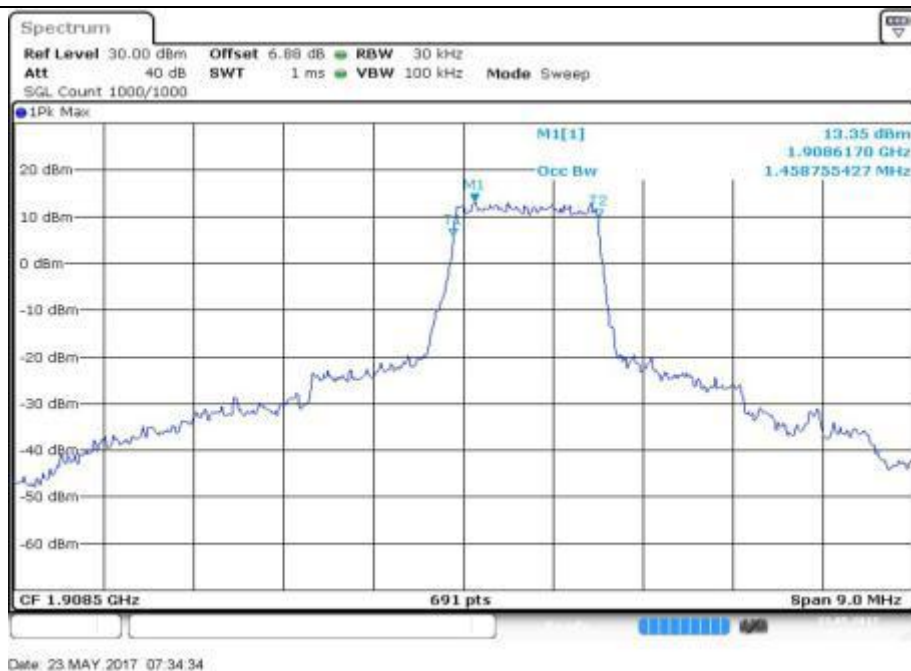


Fig.3

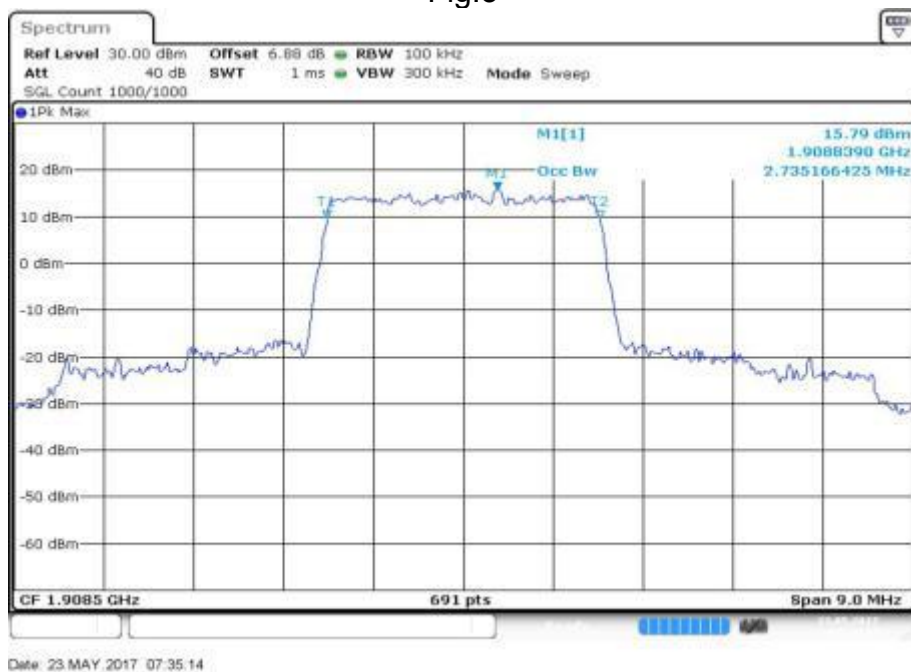


Fig.4

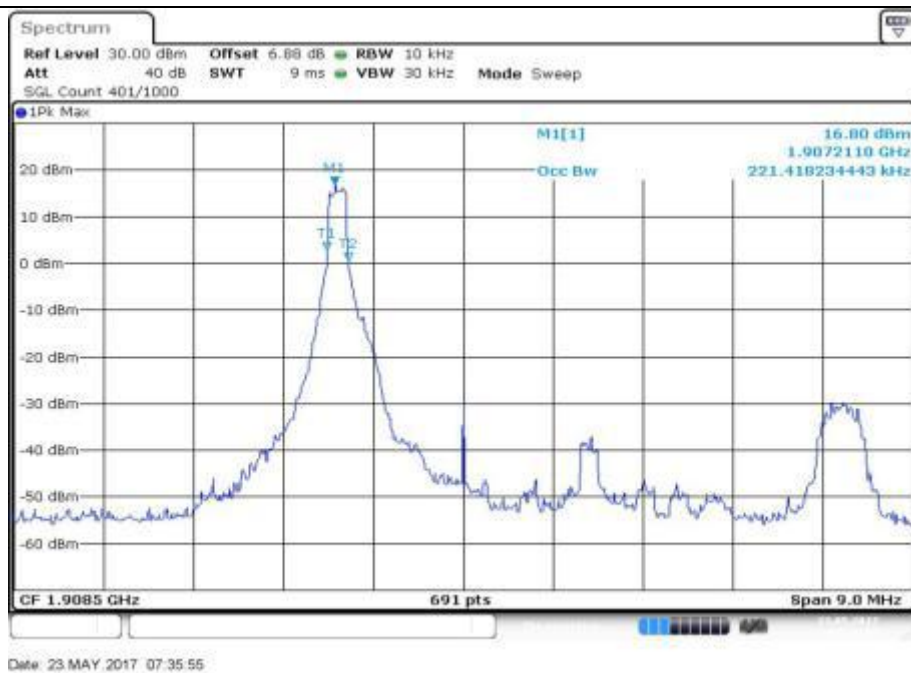


Fig.5

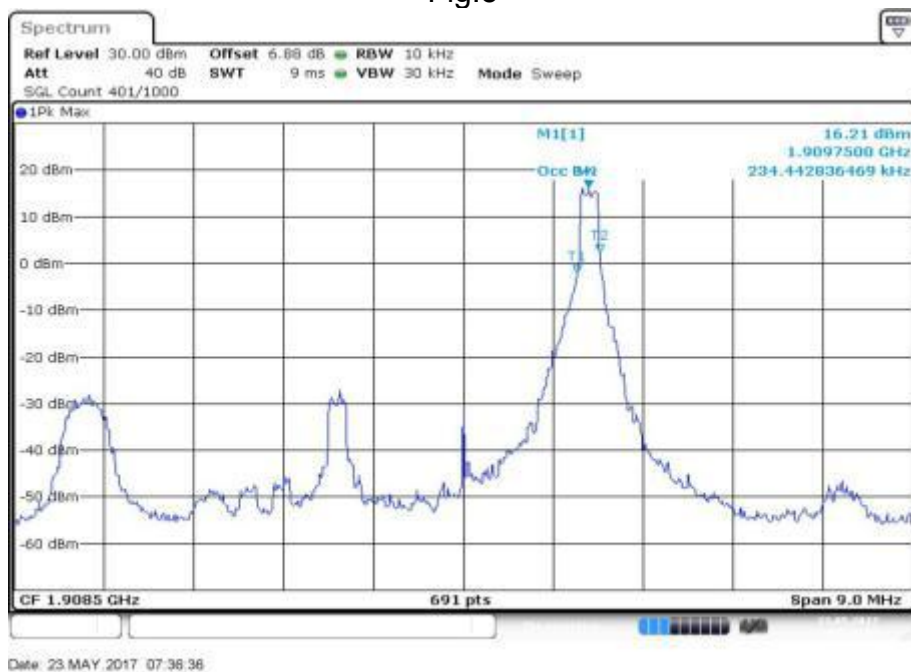


Fig.6

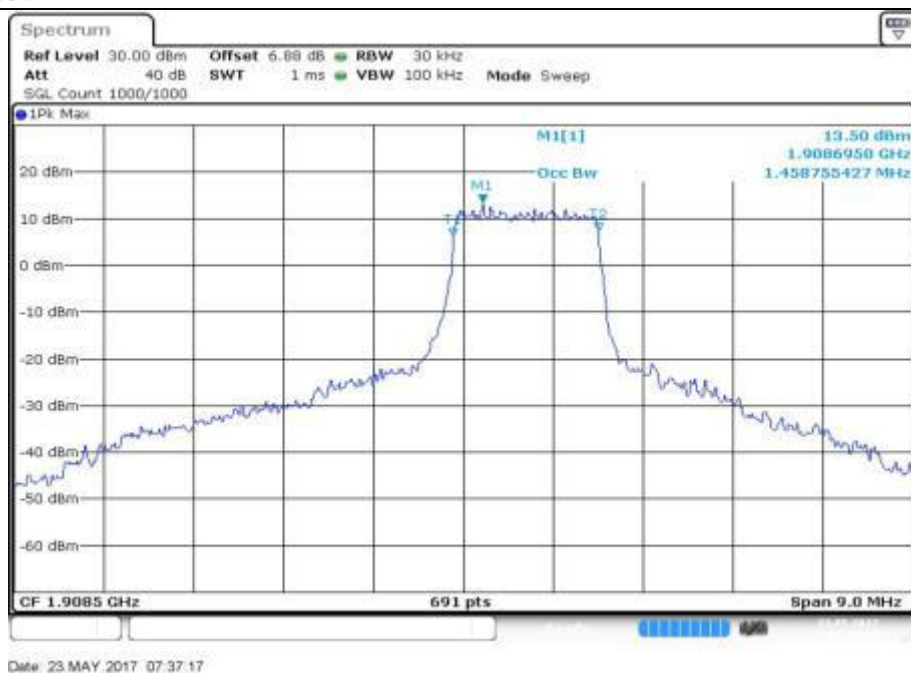


Fig.7

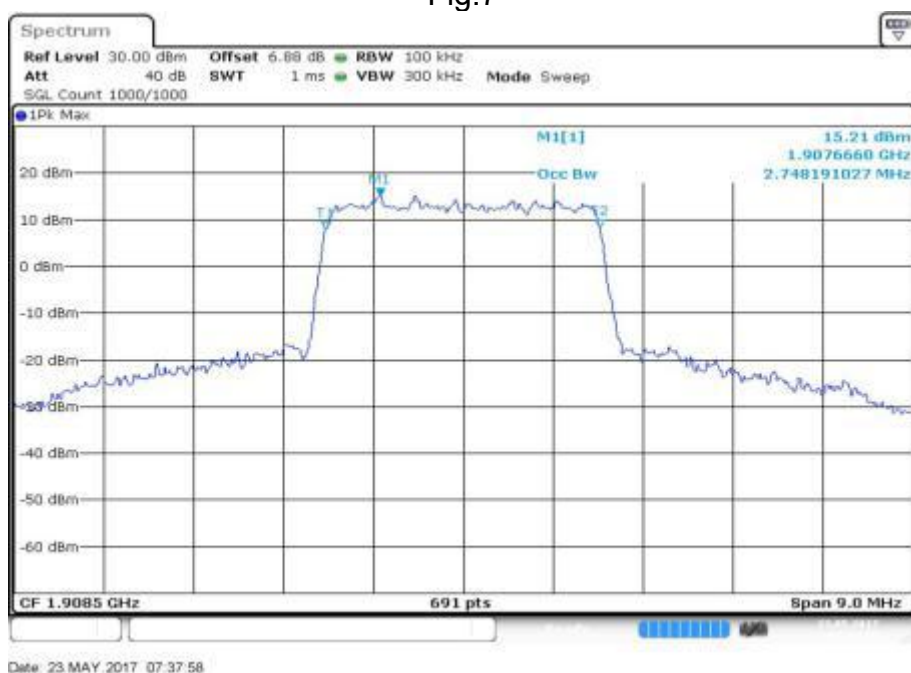


Fig.8

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	Bandwidth of 99% Power (MHz)			
						QPSK		16-QAM	
2	1852.5	18625	5	1	0	0.239	Fig.1	0.239	Fig.5
				1	24	0.260	Fig.2	0.260	Fig.6
				12	6	2.192	Fig.3	2.171	Fig.7
				25	0	4.537	Fig.4	4.515	Fig.8

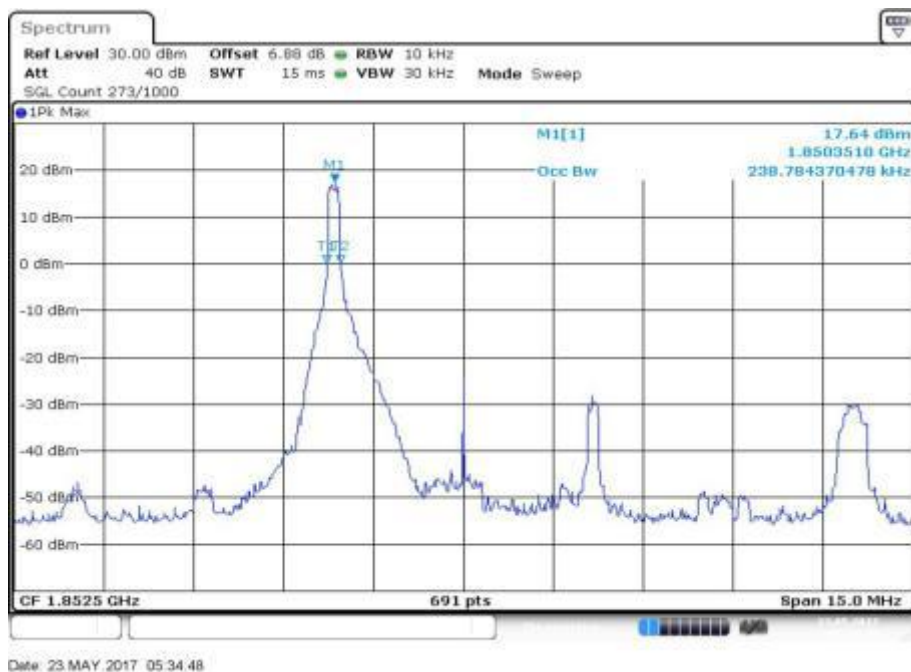


Fig.1

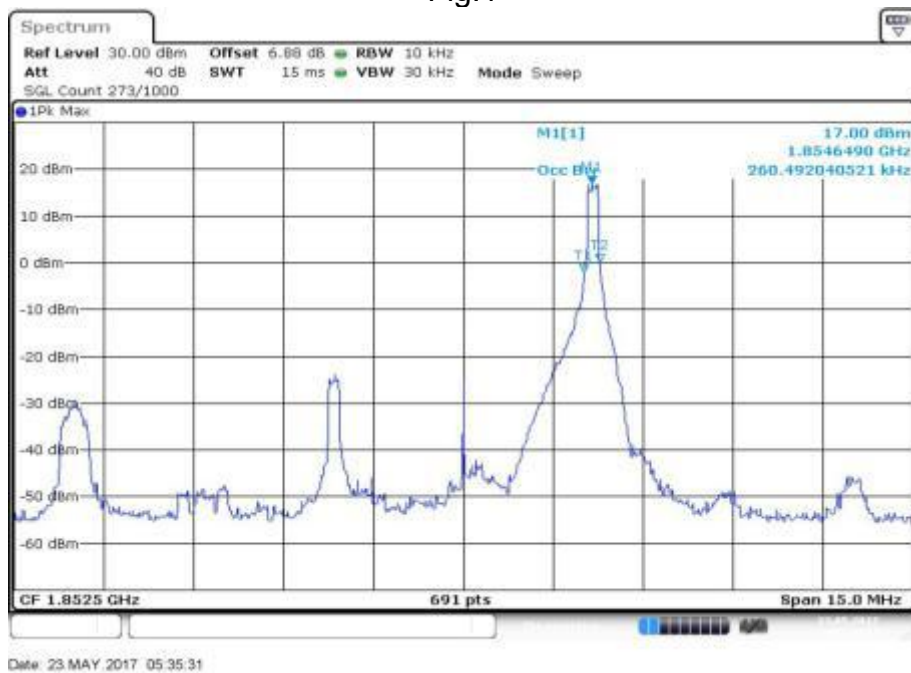


Fig.2

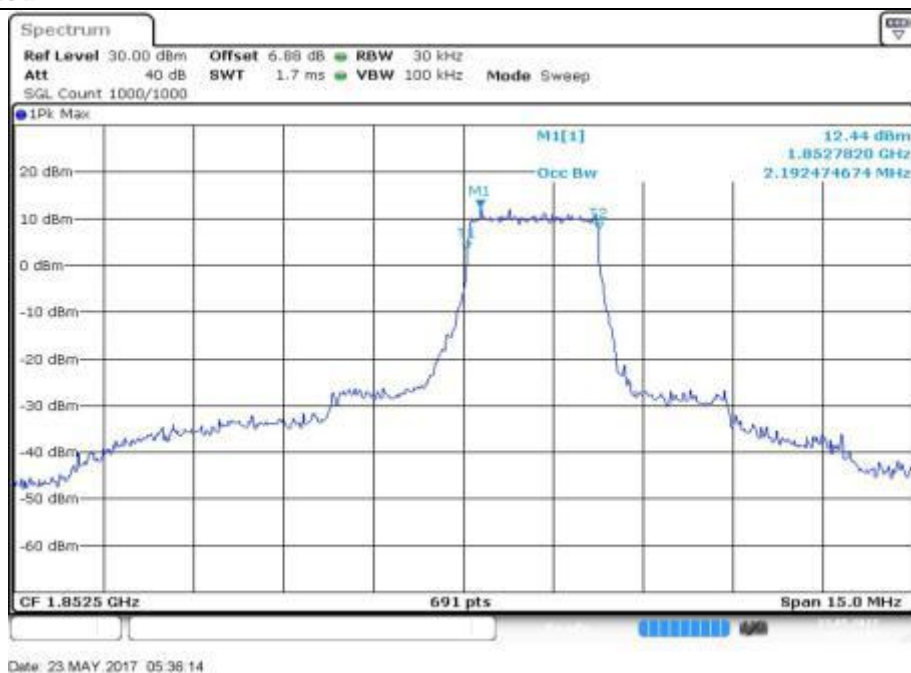


Fig.3

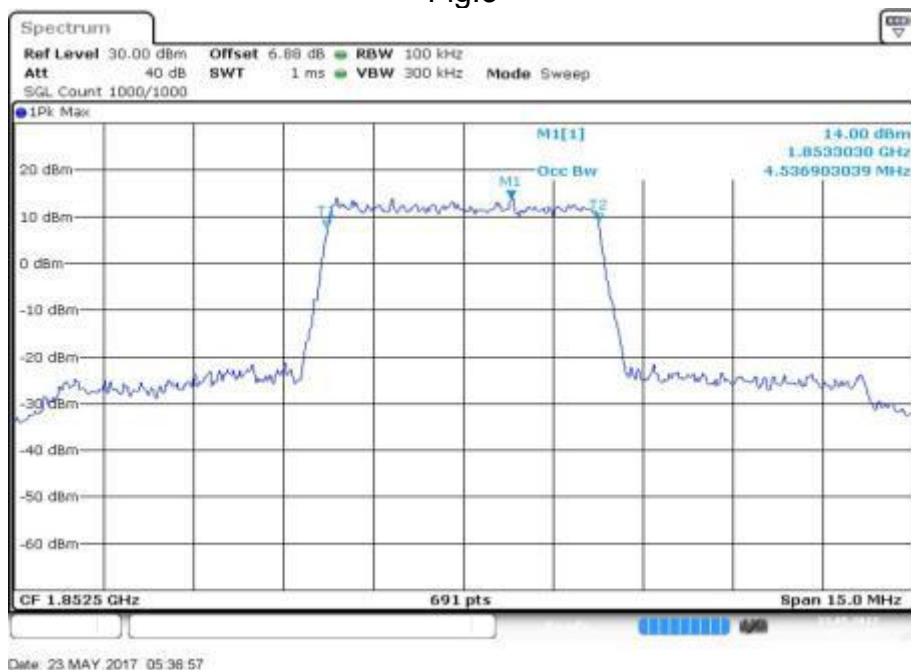


Fig.4

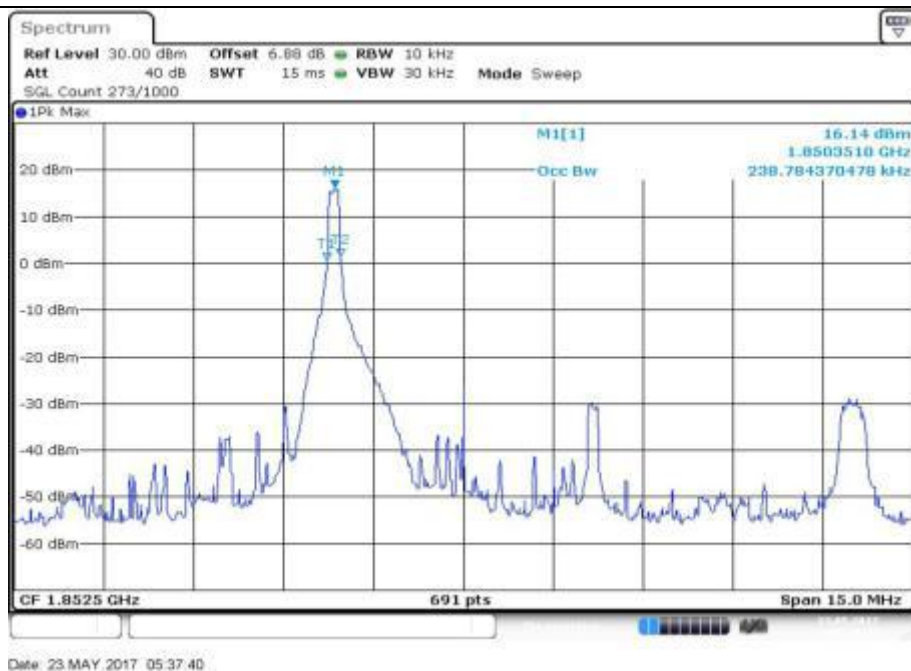


Fig.5

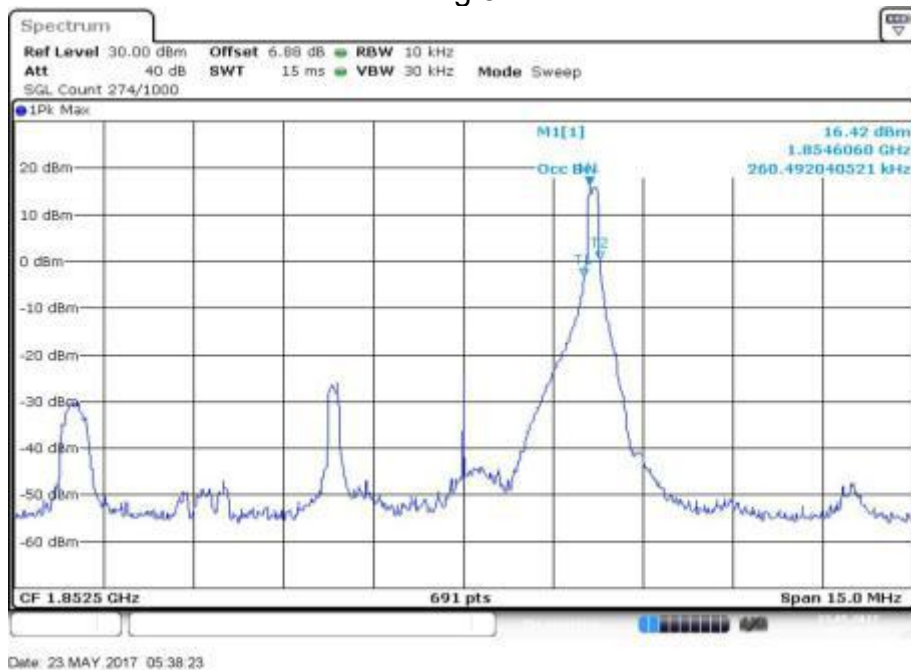


Fig.6



Fig.7

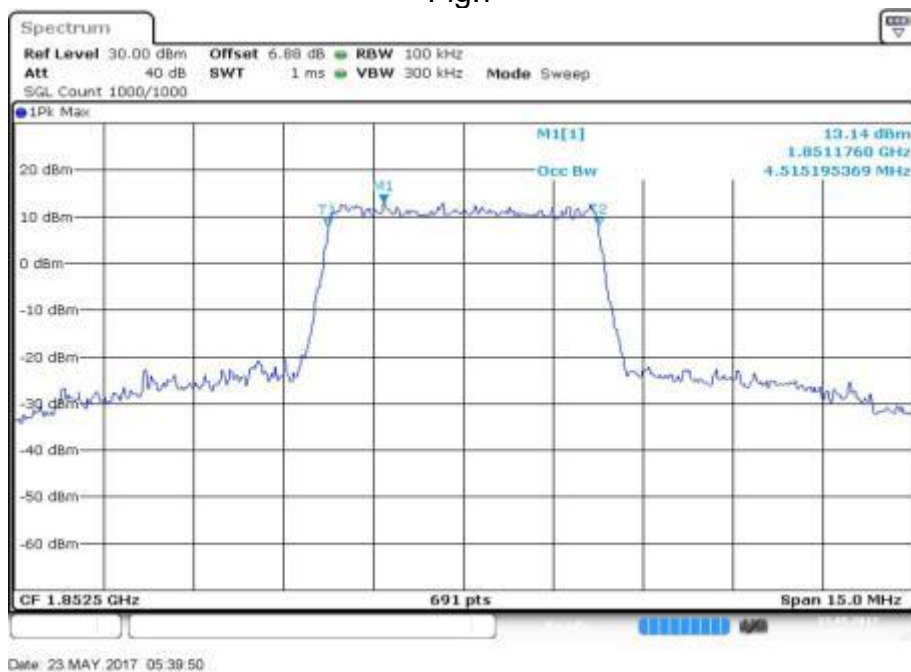


Fig.8

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	Bandwidth of 99% Power (MHz)			
						QPSK		16-QAM	
2	1880	18900	5	1	0	0.239	Fig.1	0.260	Fig.5
				1	24	0.239	Fig.2	0.239	Fig.6
				12	6	2.171	Fig.3	2.171	Fig.7
				25	0	4.515	Fig.4	4.515	Fig.8

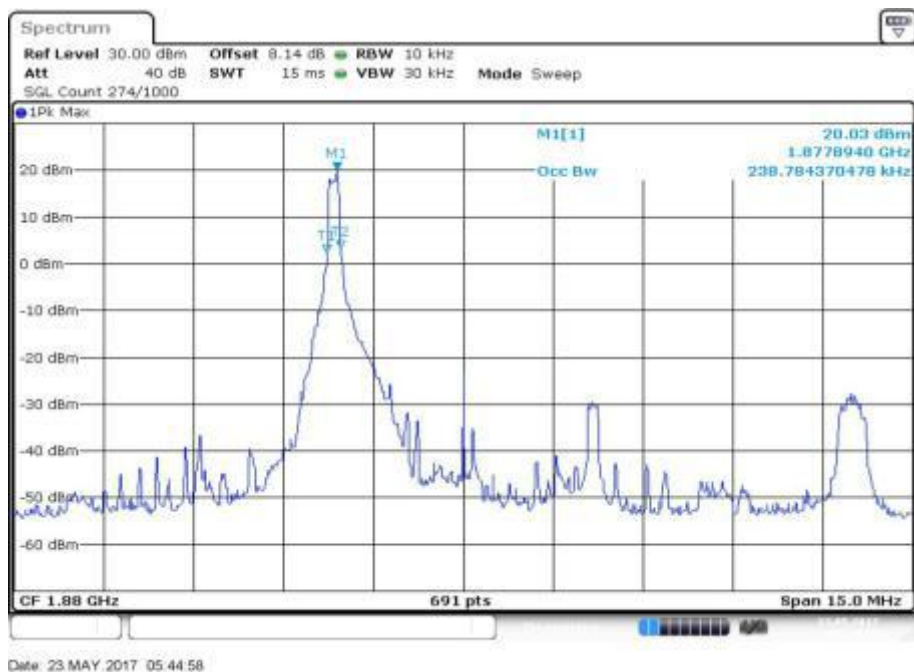


Fig.1

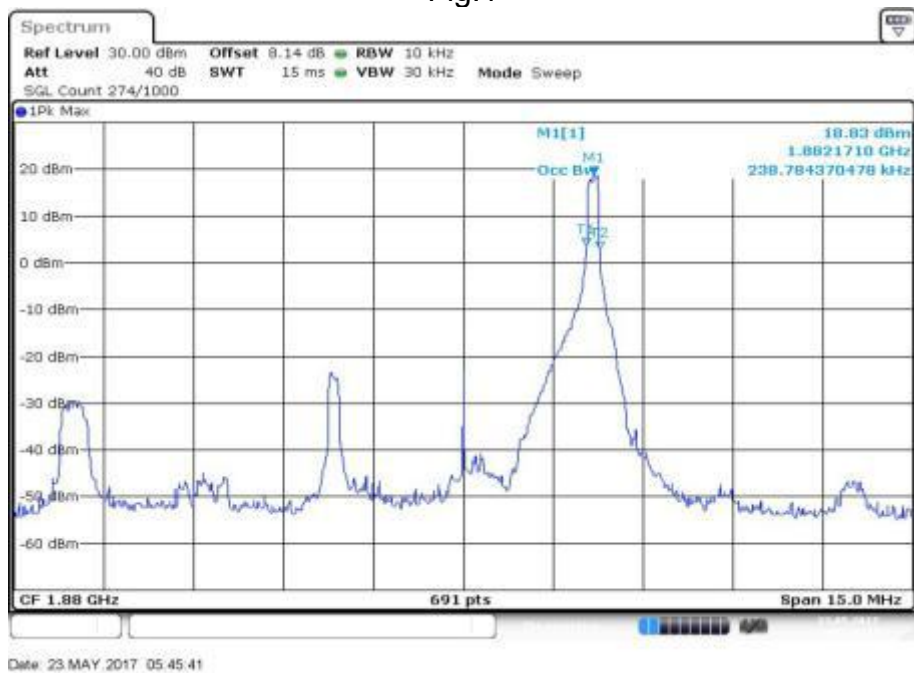


Fig.2

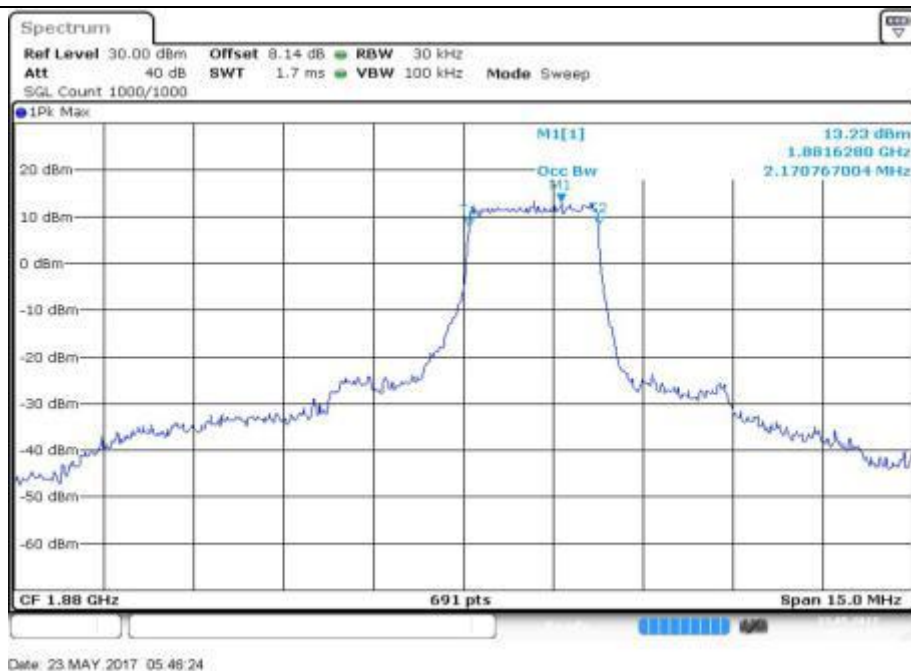


Fig.3



Fig.4

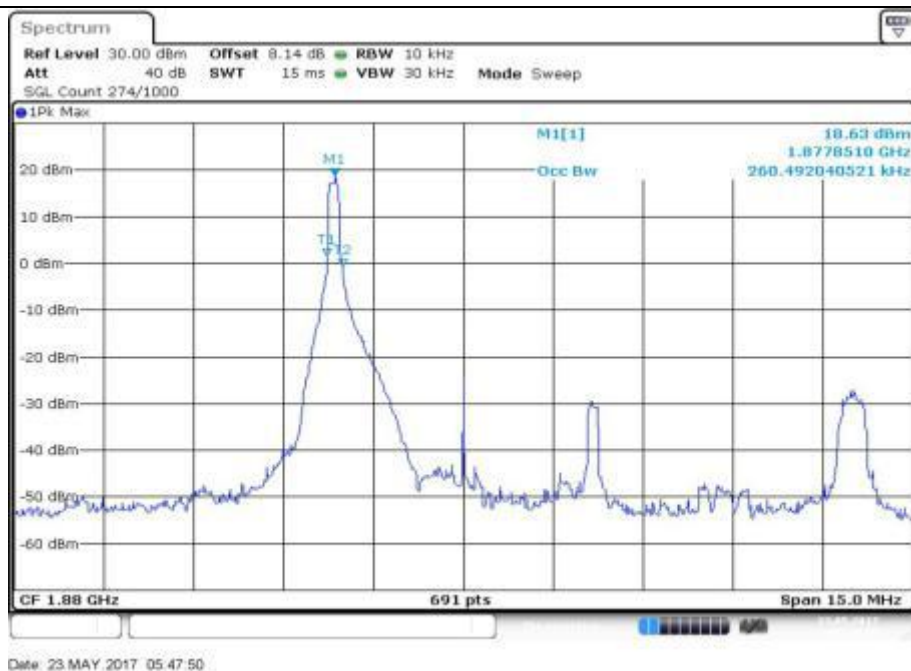


Fig.5

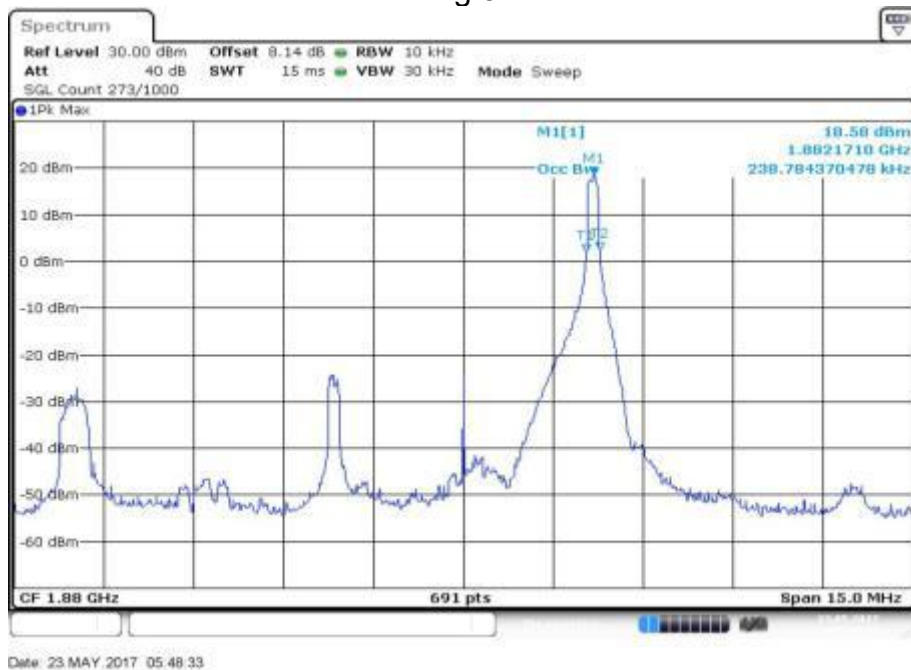


Fig.6

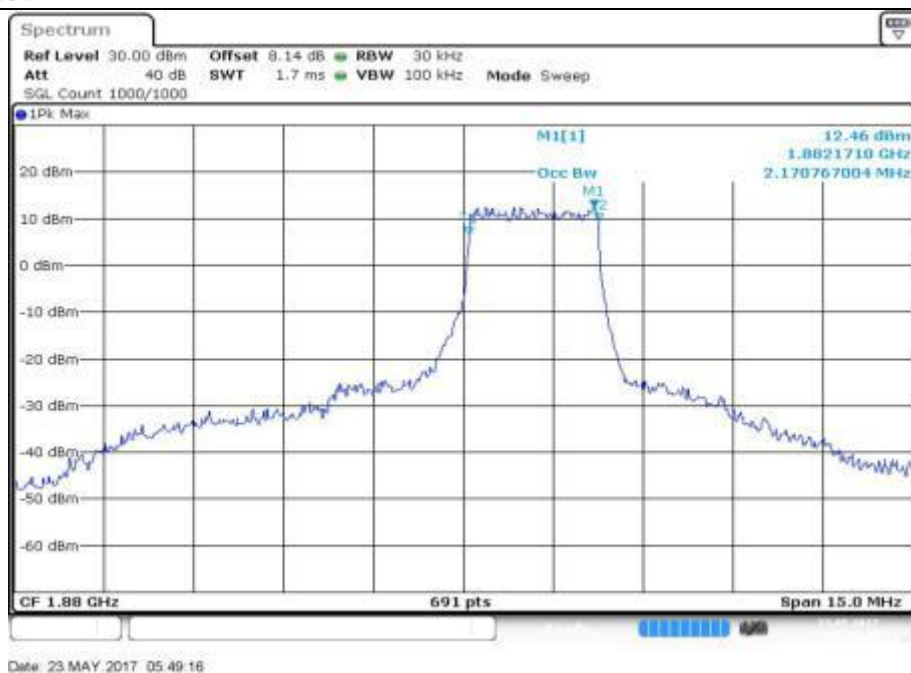


Fig.7

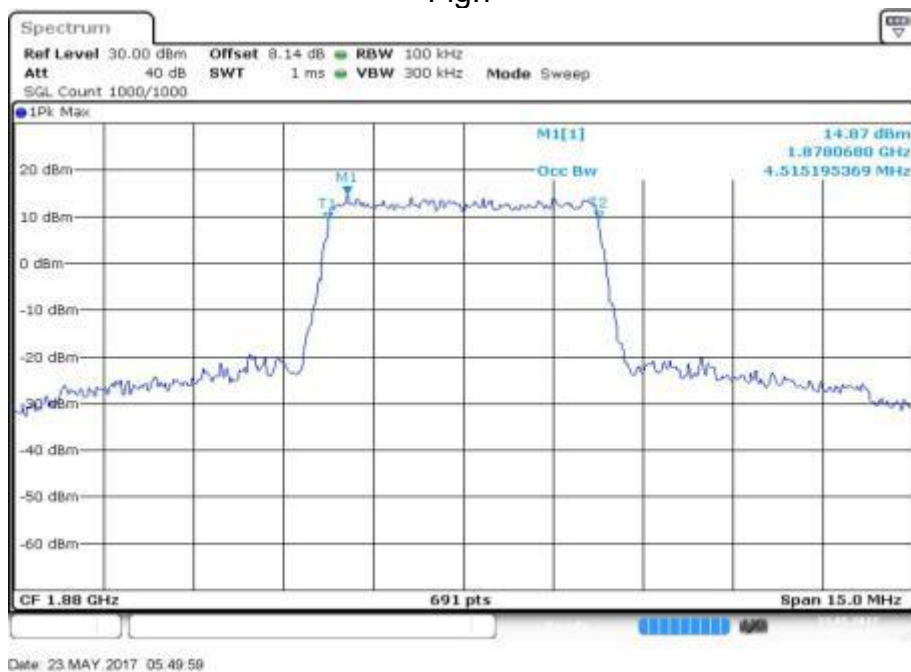


Fig.8

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	Bandwidth of 99% Power (MHz)			
						QPSK		16-QAM	
2	1907.5	19175	5	1	0	0.260	Fig.1	0.239	Fig.5
				1	24	0.260	Fig.2	0.260	Fig.6
				12	6	2.192	Fig.3	2.171	Fig.7
				25	0	4.515	Fig.4	4.537	Fig.8

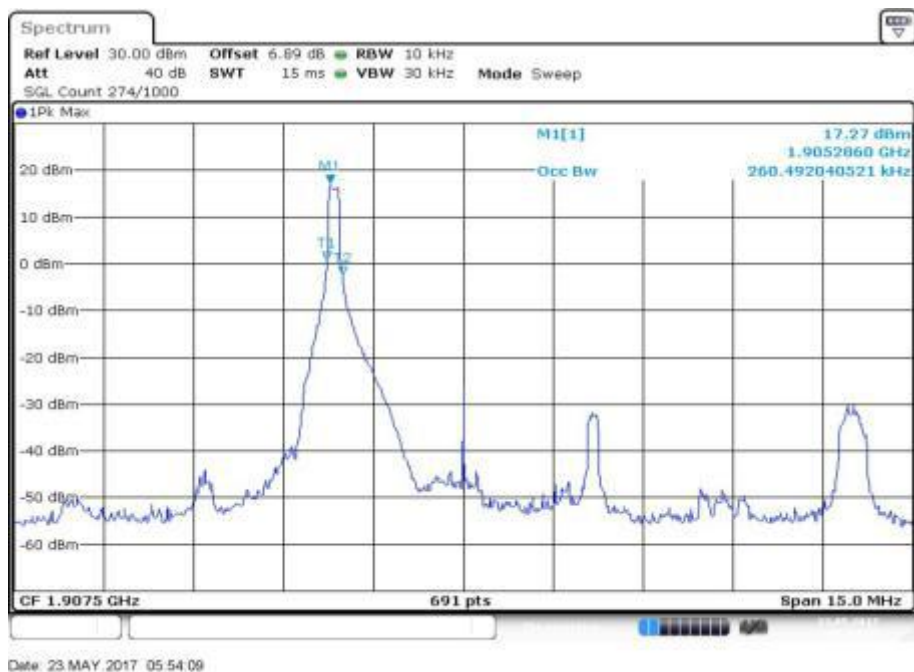


Fig.1

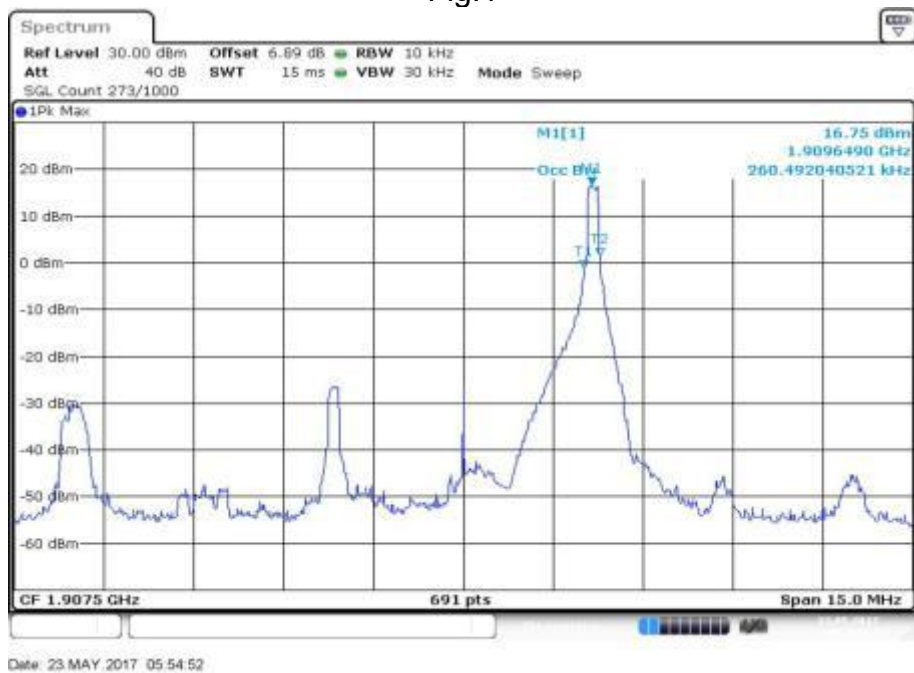


Fig.2



Fig.3

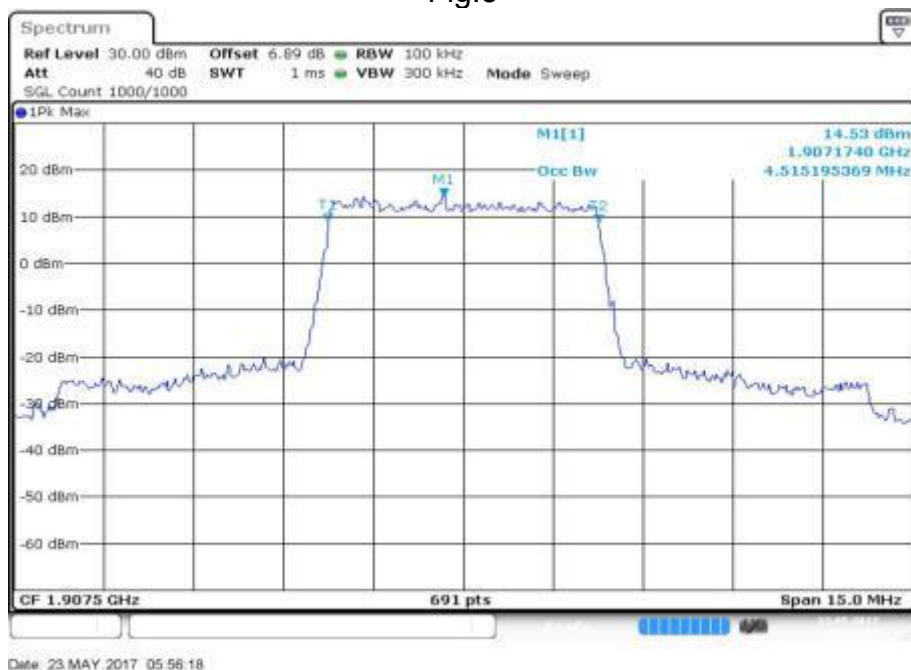


Fig.4

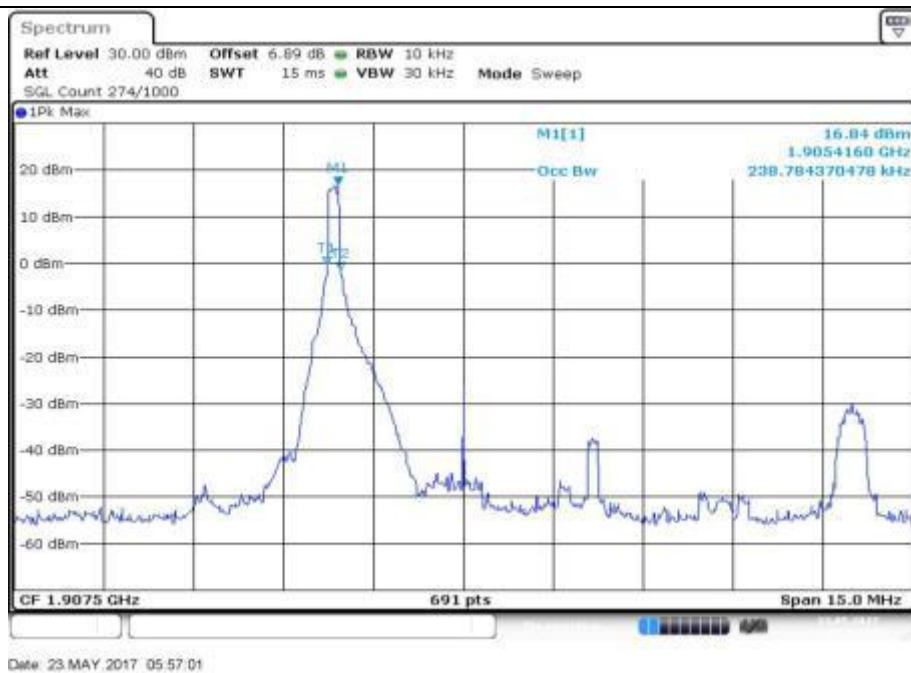


Fig.5

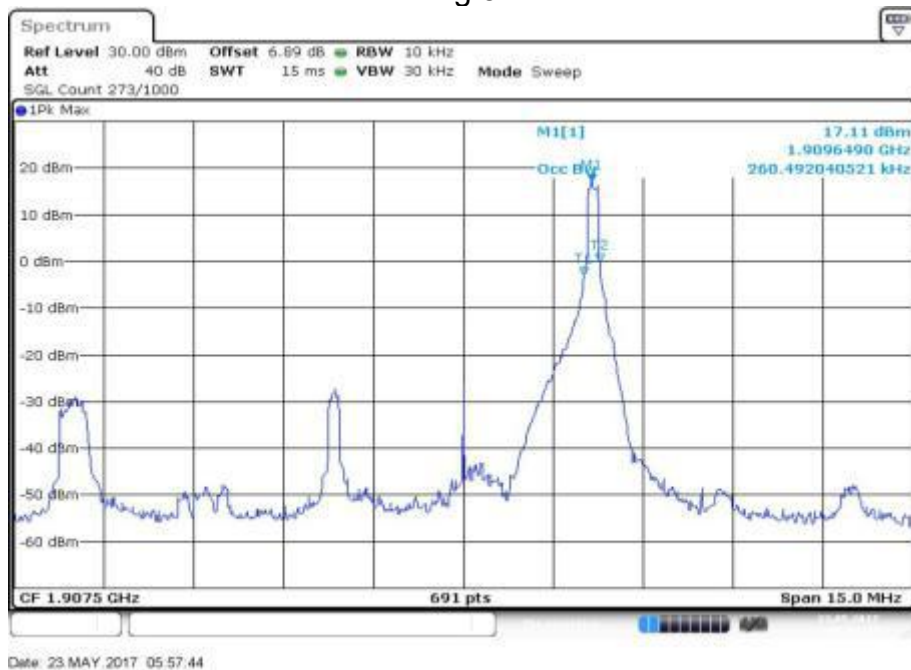


Fig.6



Fig.7

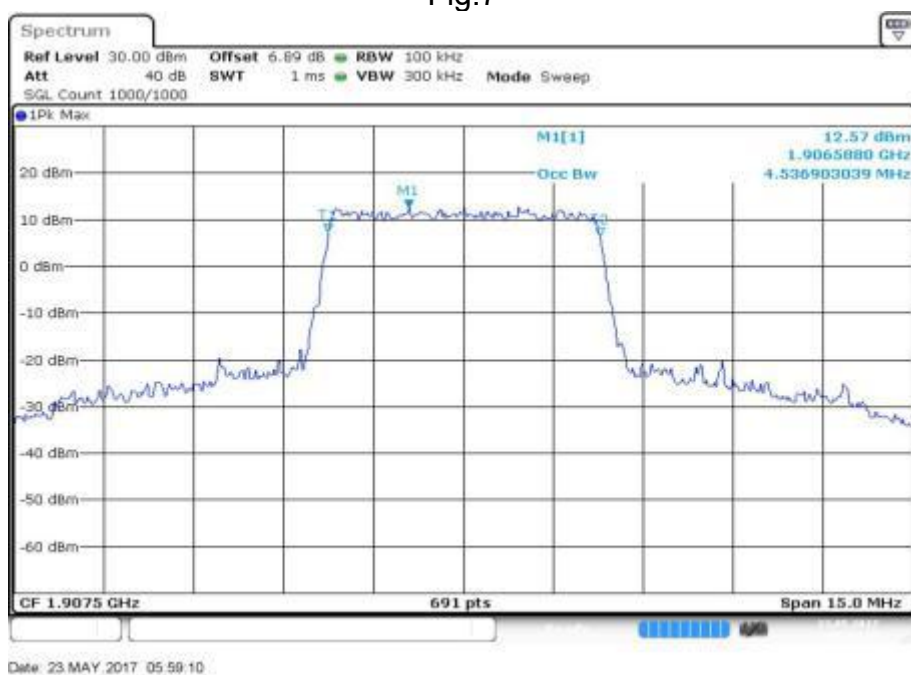


Fig.8

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	Bandwidth of 99% Power (MHz)			
						QPSK		16-QAM	
2	1855	18650	10	1	0	0.217	Fig.1	0.217	Fig.5
				1	49	0.217	Fig.2	0.217	Fig.6
				24	12	4.342	Fig.3	4.385	Fig.7
				50	0	9.074	Fig.4	9.117	Fig.8

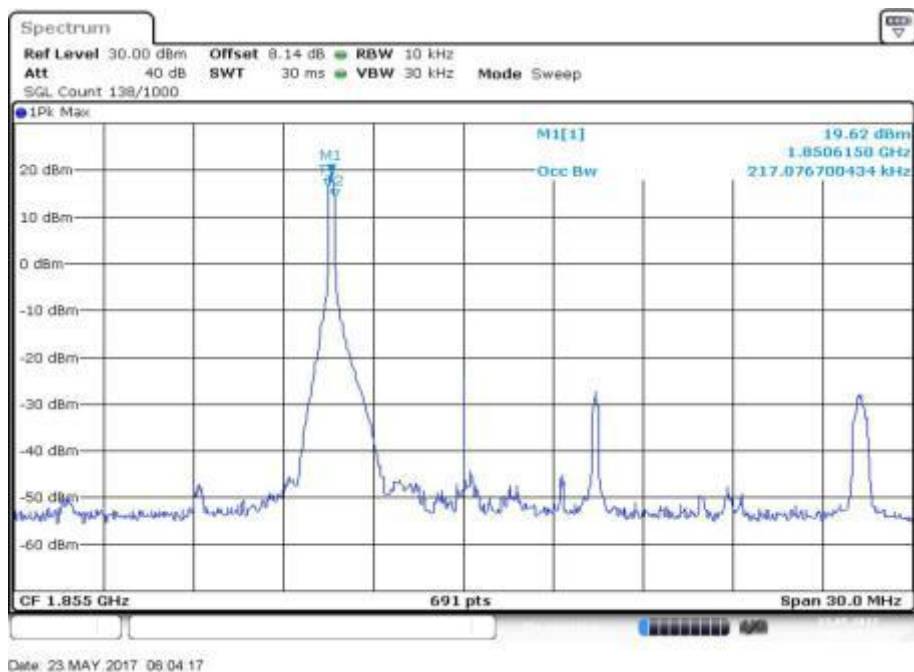


Fig.1

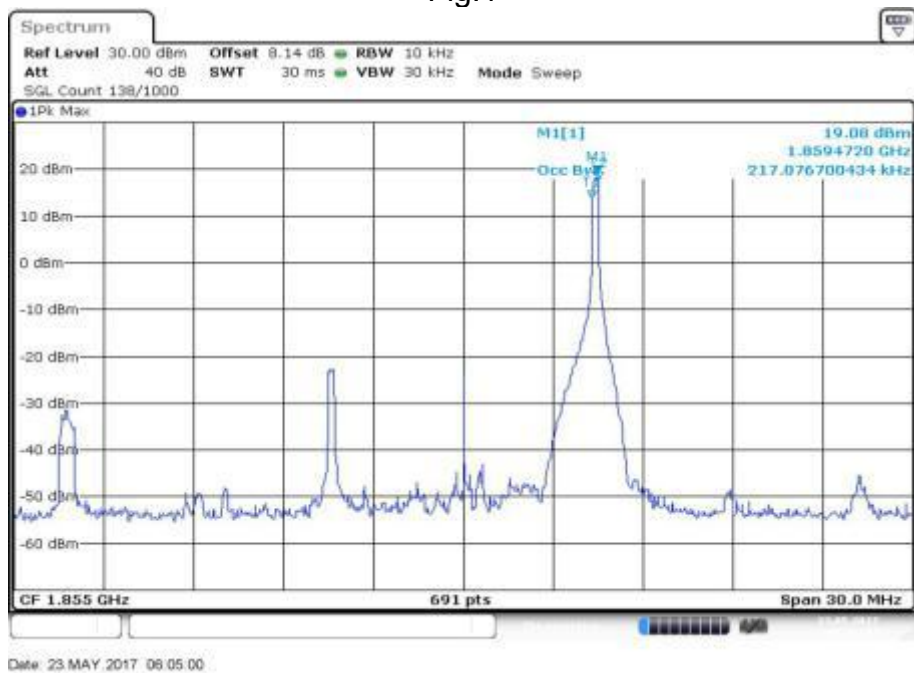


Fig.2

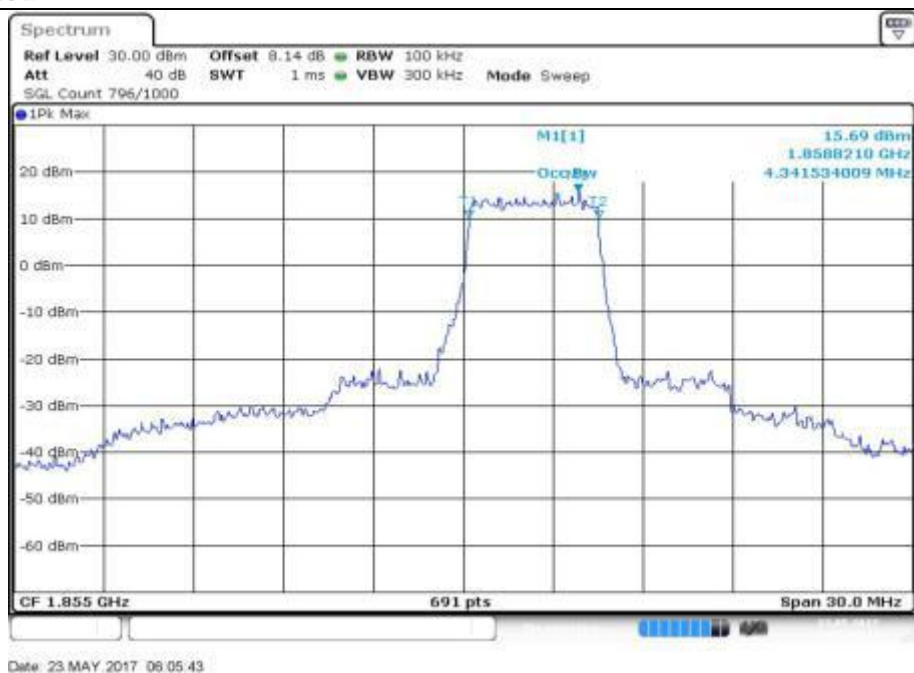


Fig.3

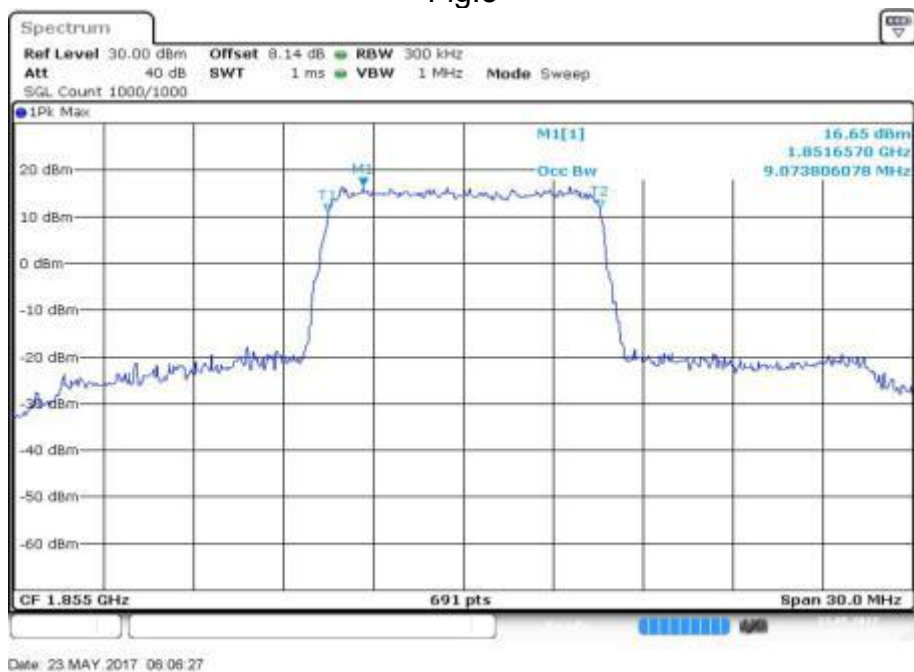


Fig.4

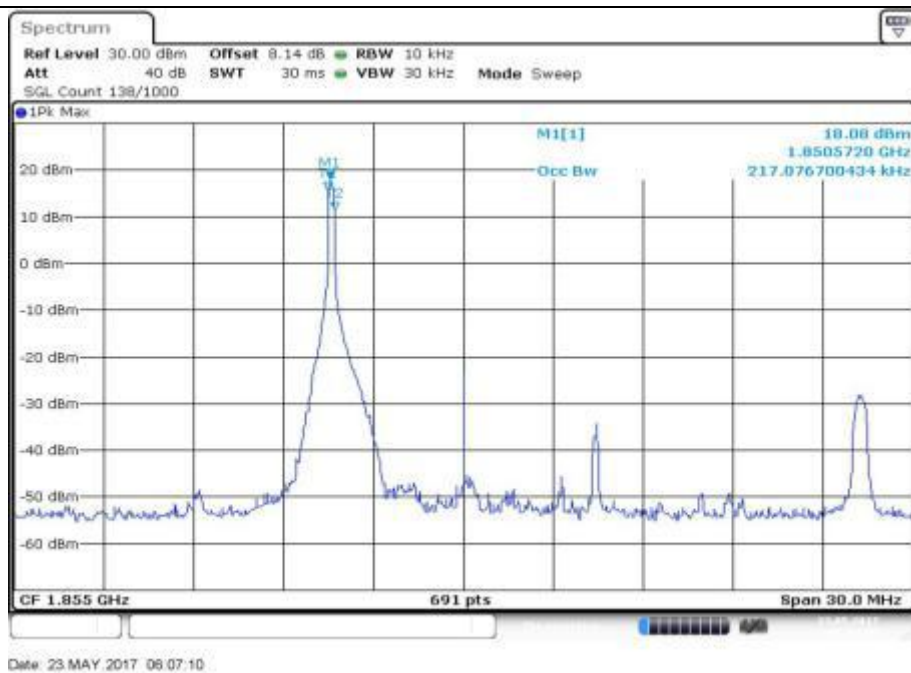


Fig.5

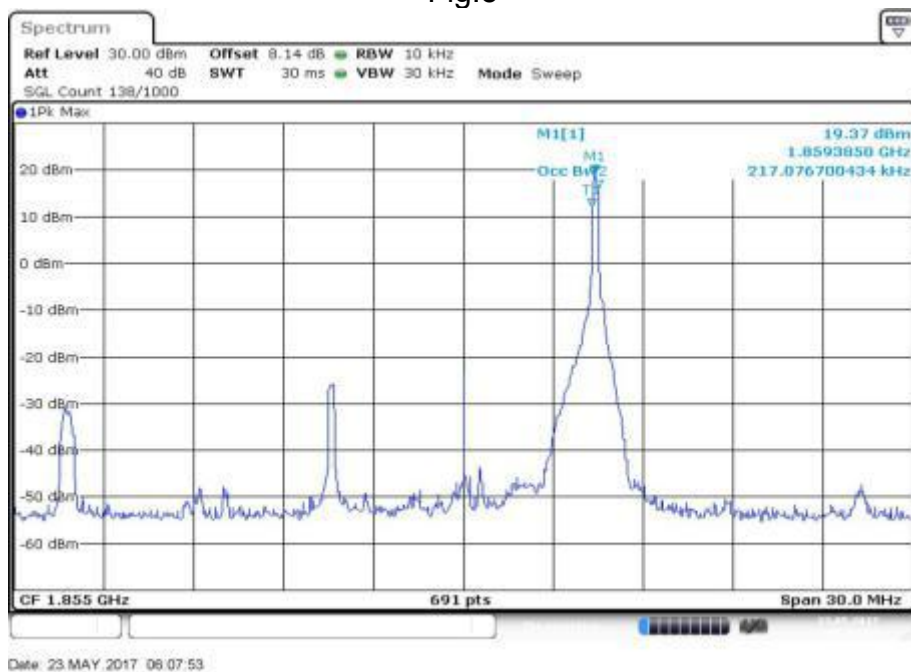


Fig.6

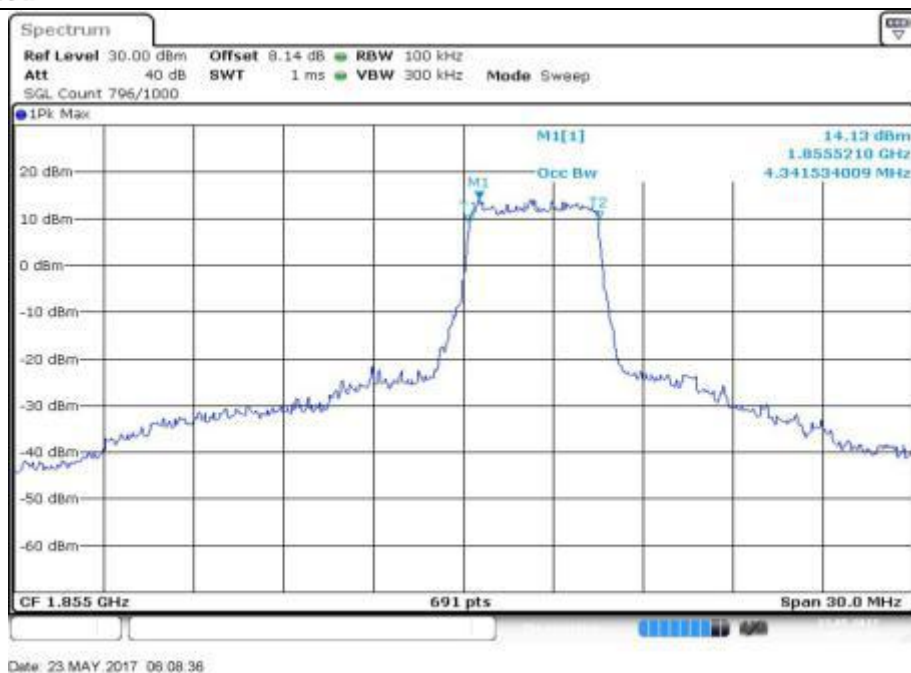


Fig.7

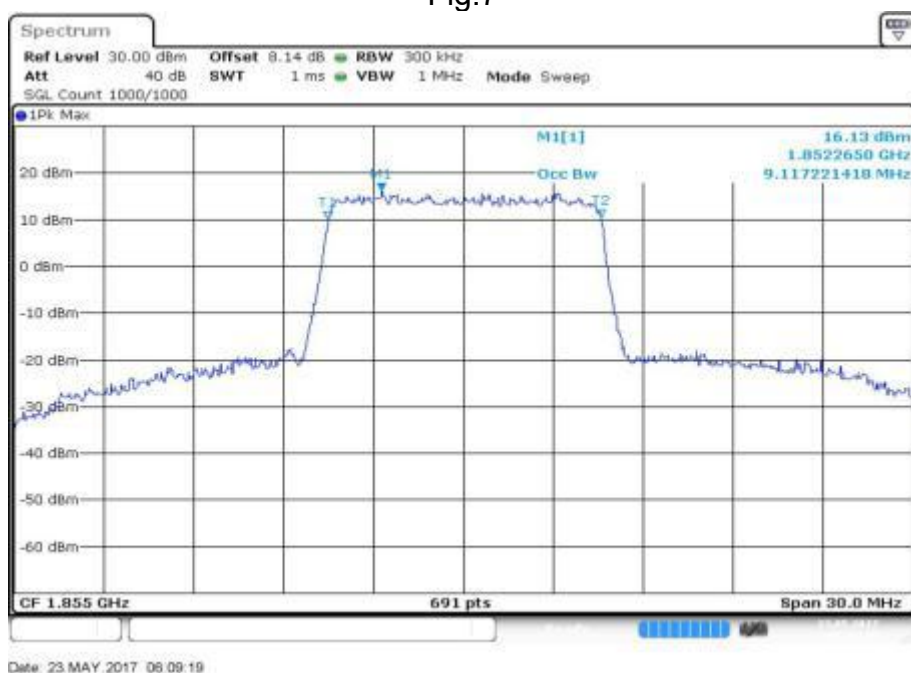


Fig.8

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	Bandwidth of 99% Power (MHz)			
						QPSK		16-QAM	
2	1880	18900	10	1	0	0.217	Fig.1	0.304	Fig.5
				1	49	0.217	Fig.2	0.260	Fig.6
				24	12	4.385	Fig.3	4.342	Fig.7
				50	0	9.030	Fig.4	9.074	Fig.8

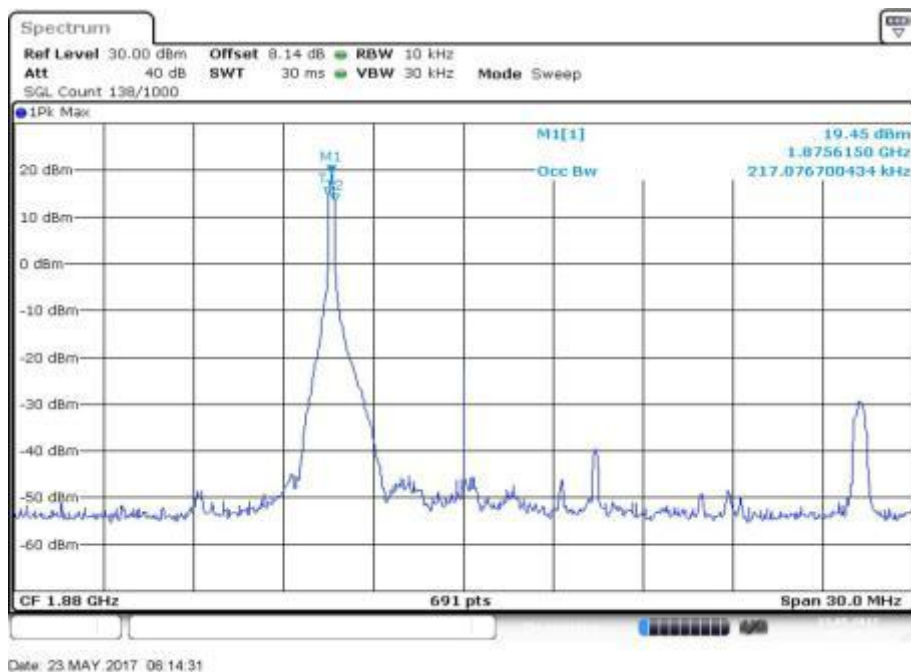


Fig.1

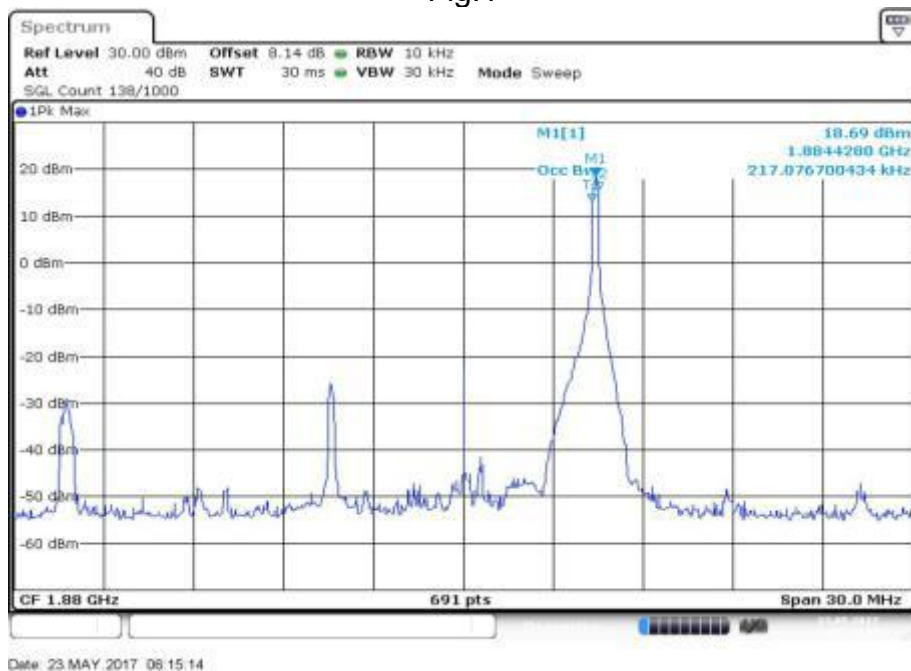


Fig.2



Fig.3



Fig.4

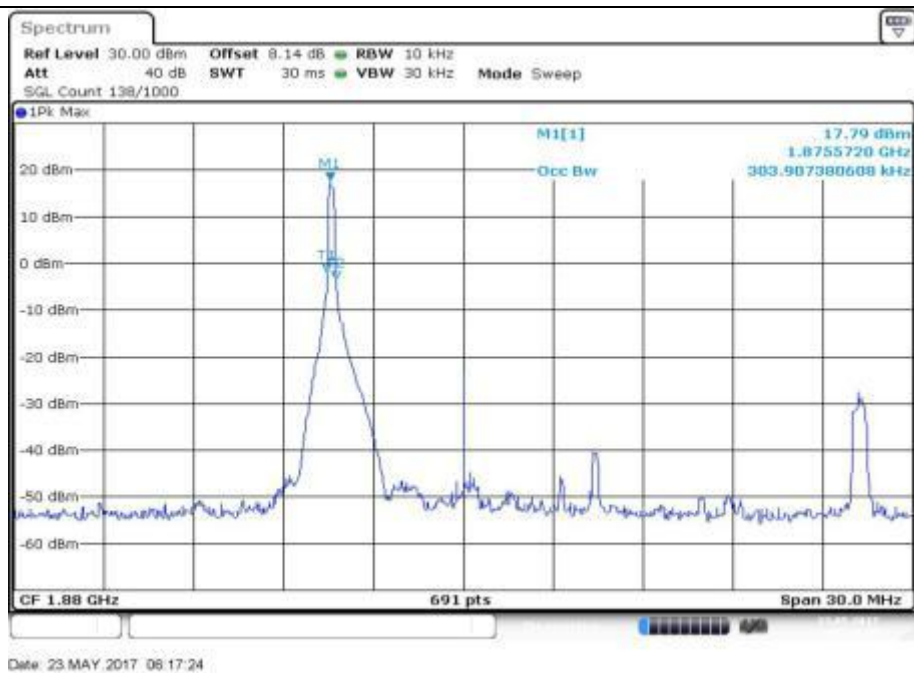


Fig.5

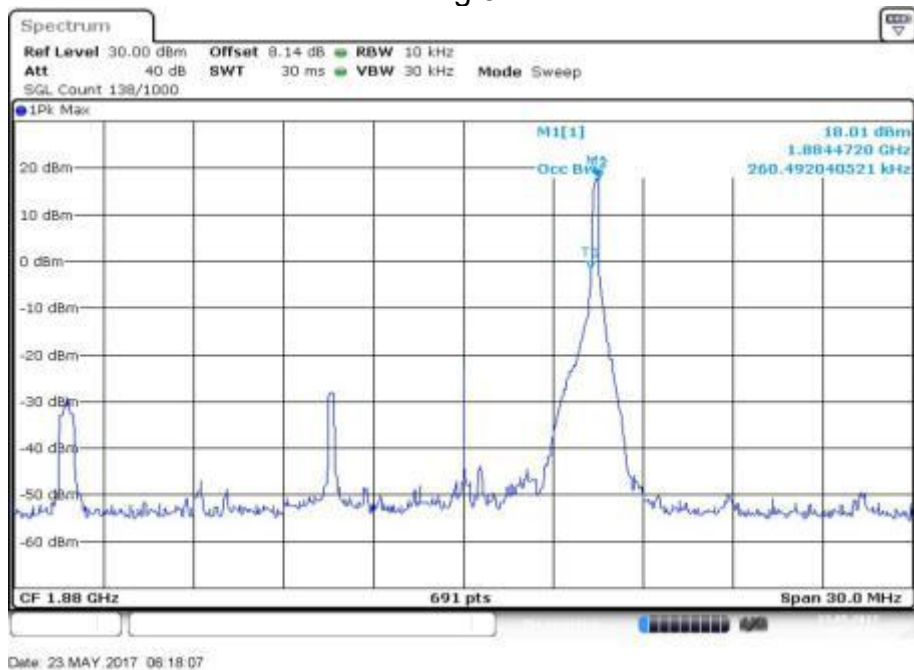


Fig.6



Fig.7

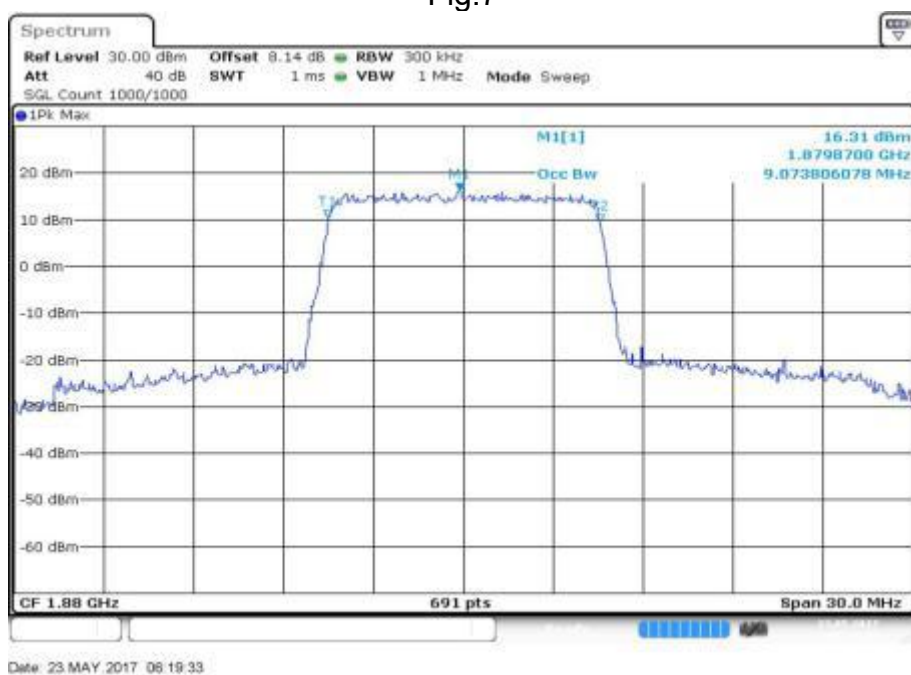


Fig.8

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	Bandwidth of 99% Power (MHz)			
						QPSK		16-QAM	
2	1905	19150	10	1	0	0.260	Fig.1	0.304	Fig.5
				1	49	0.260	Fig.2	0.304	Fig.6
				24	12	4.342	Fig.3	4.385	Fig.7
				50	0	9.030	Fig.4	9.030	Fig.8

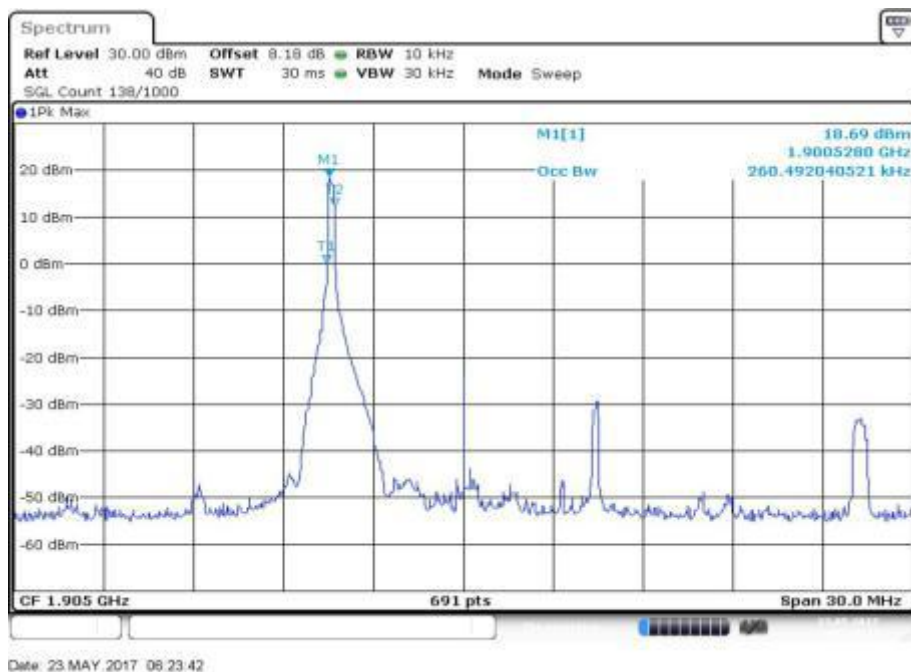


Fig.1

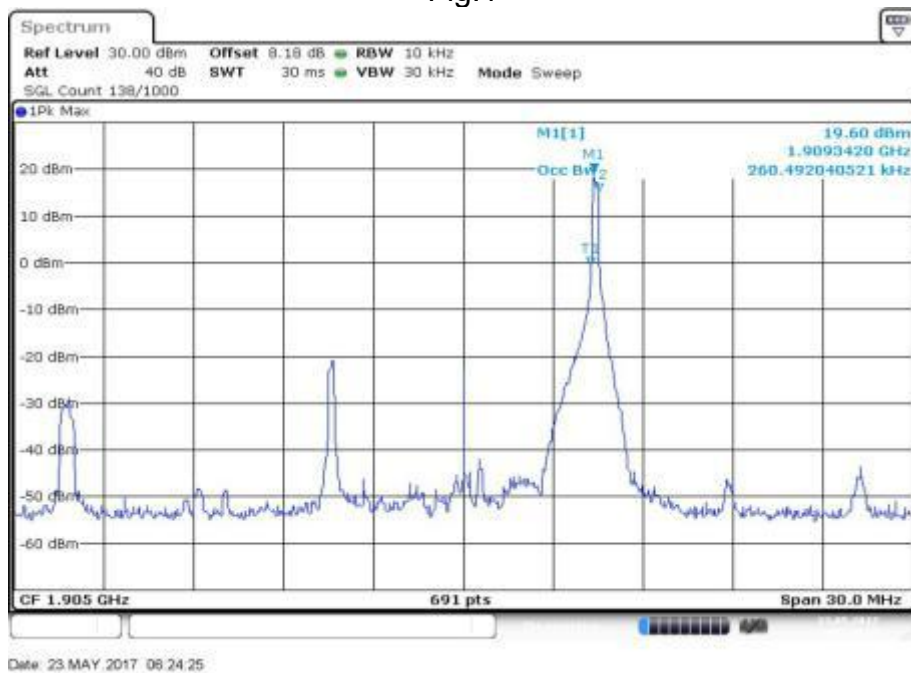


Fig.2

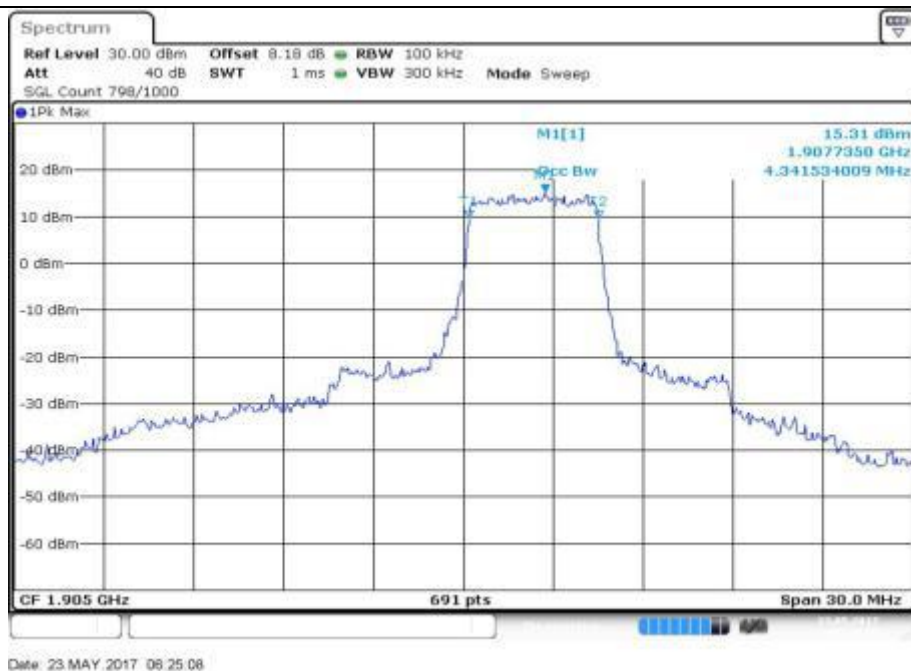


Fig.3

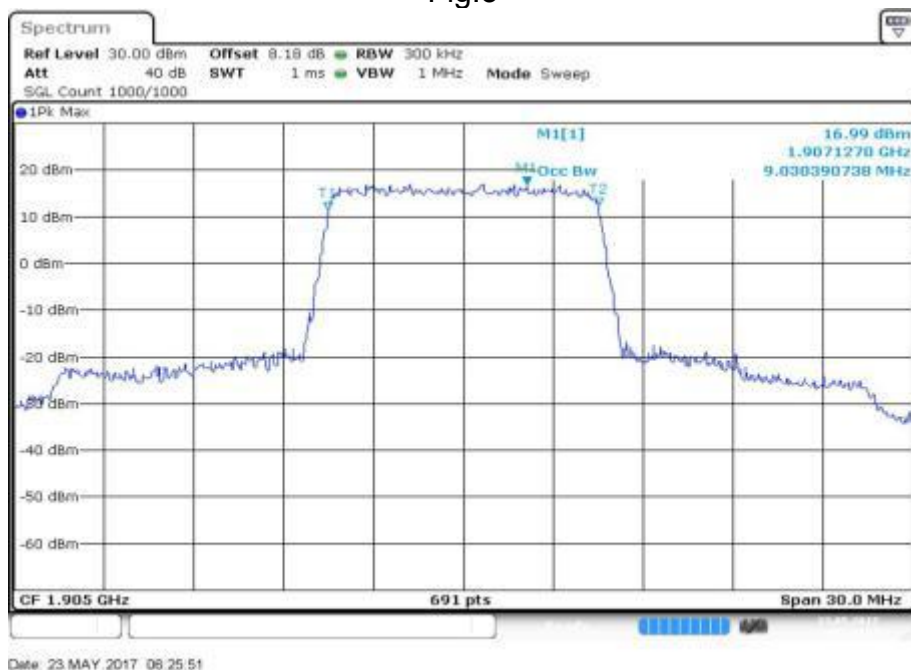


Fig.4

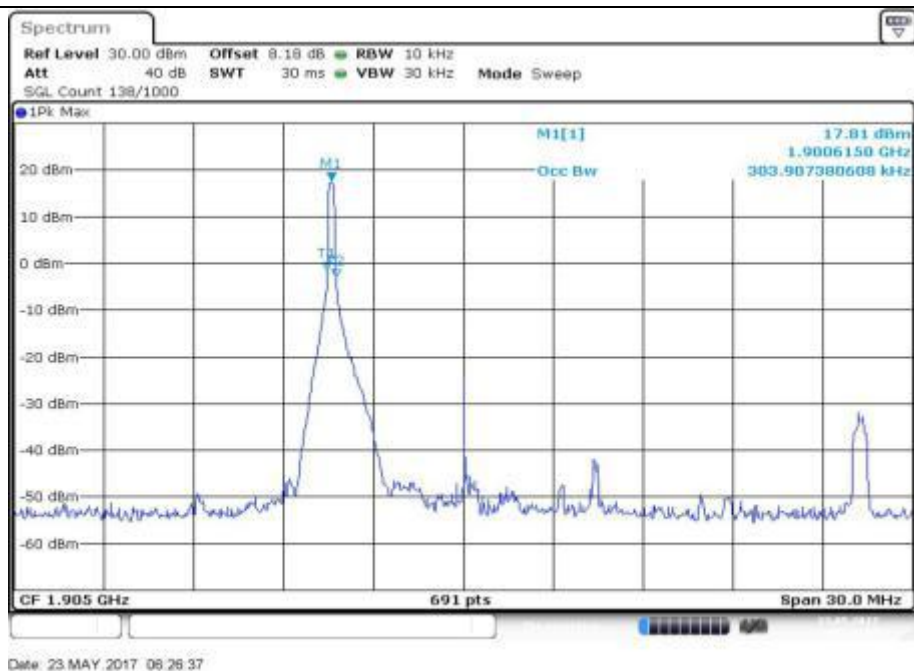


Fig.5

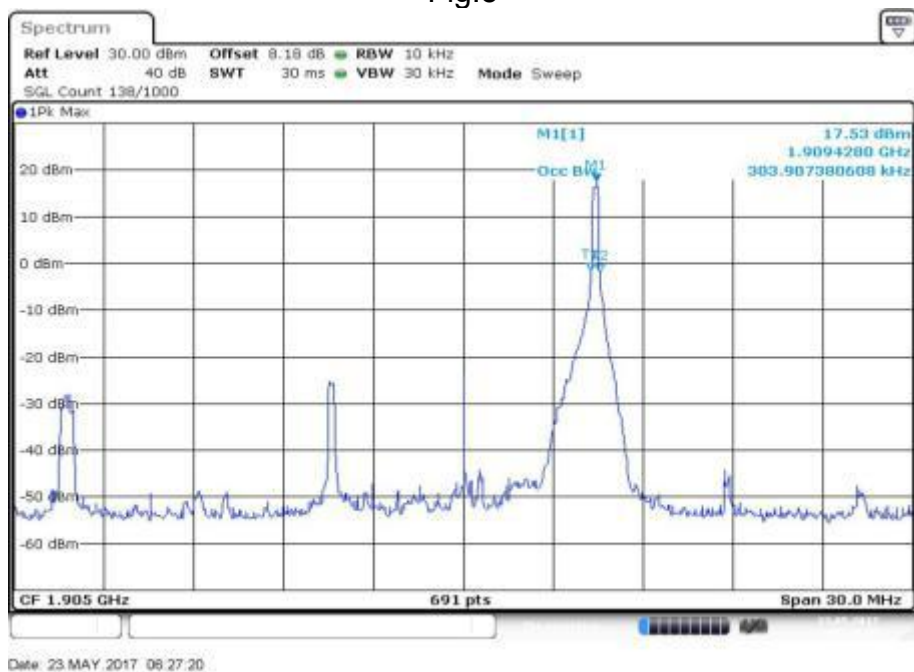


Fig.6

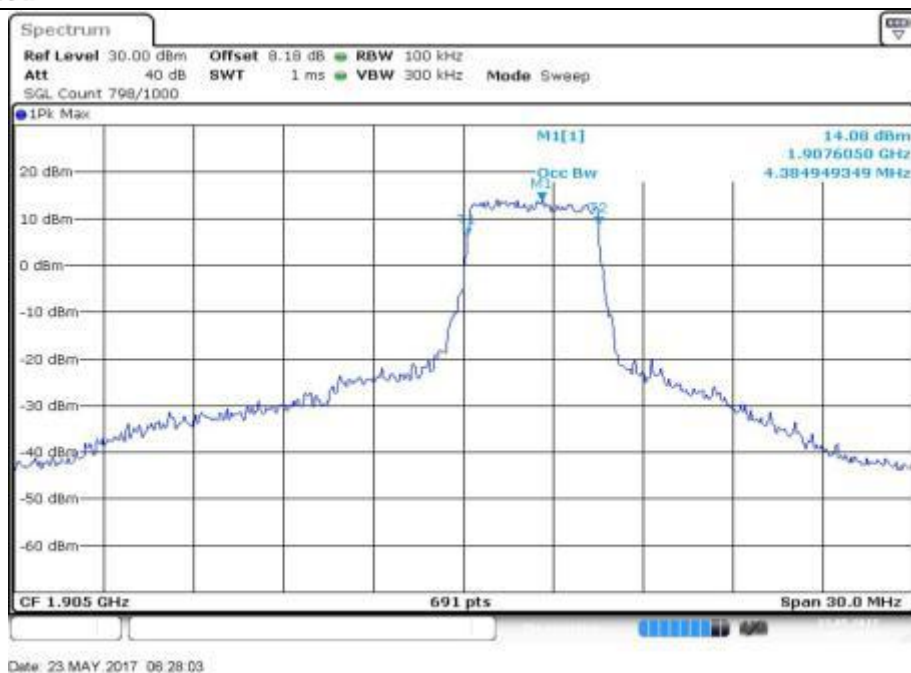


Fig.7

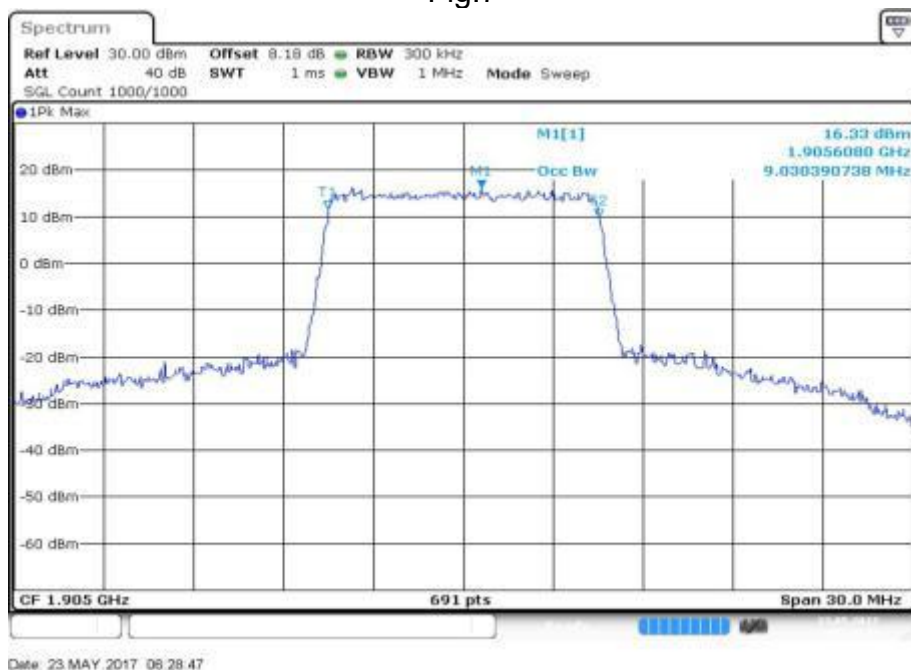


Fig.8

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	Bandwidth of 99% Power (MHz)			
						QPSK		16-QAM	
2	1857.5	18675	15	1	0	0.260	Fig.1	0.260	Fig.5
				1	74	0.260	Fig.2	0.260	Fig.6
				40	18	7.229	Fig.3	7.229	Fig.7
				75	0	13.546	Fig.4	13.480	Fig.8

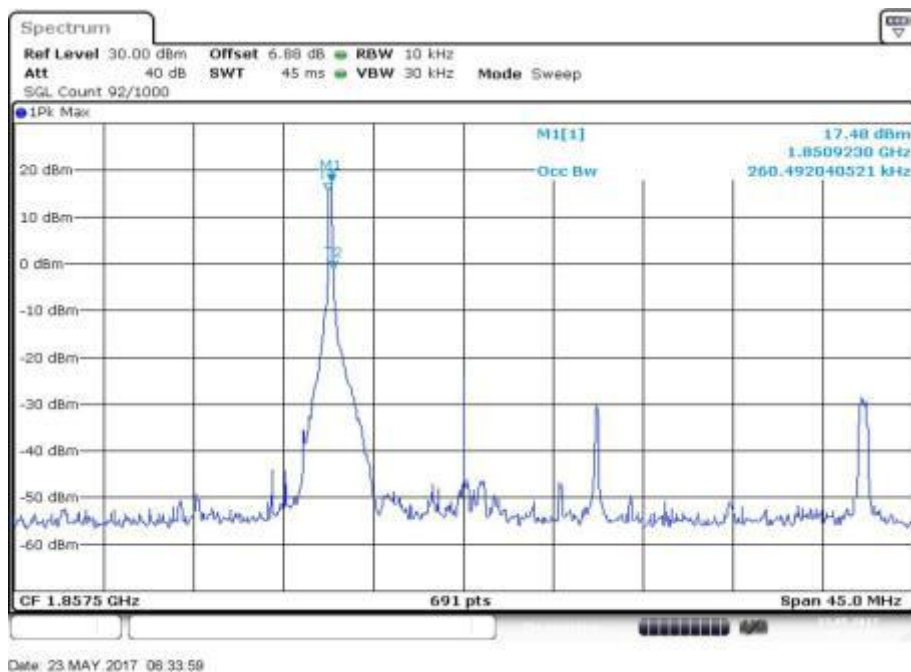


Fig.1

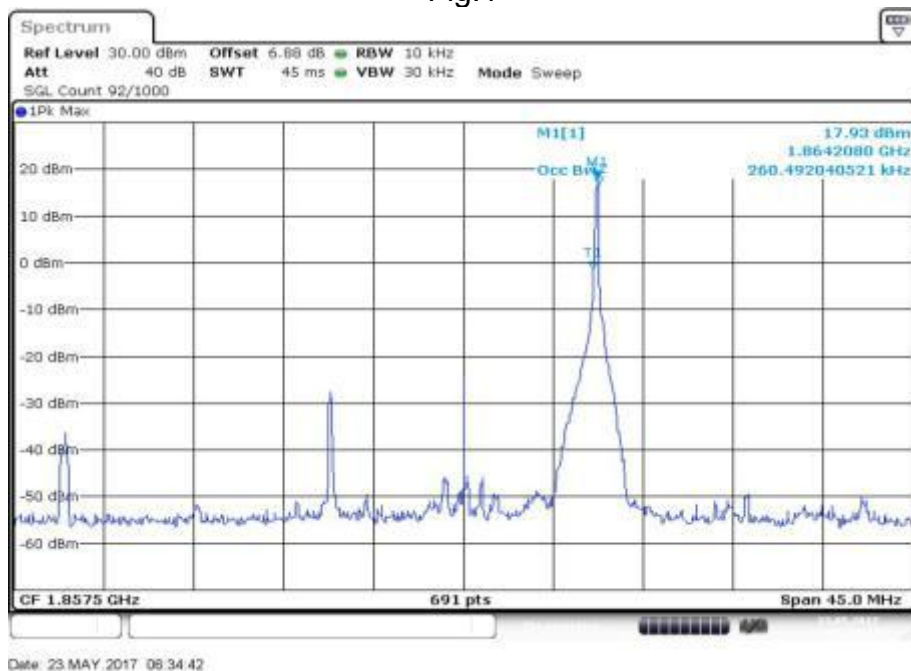


Fig.2



Fig.3

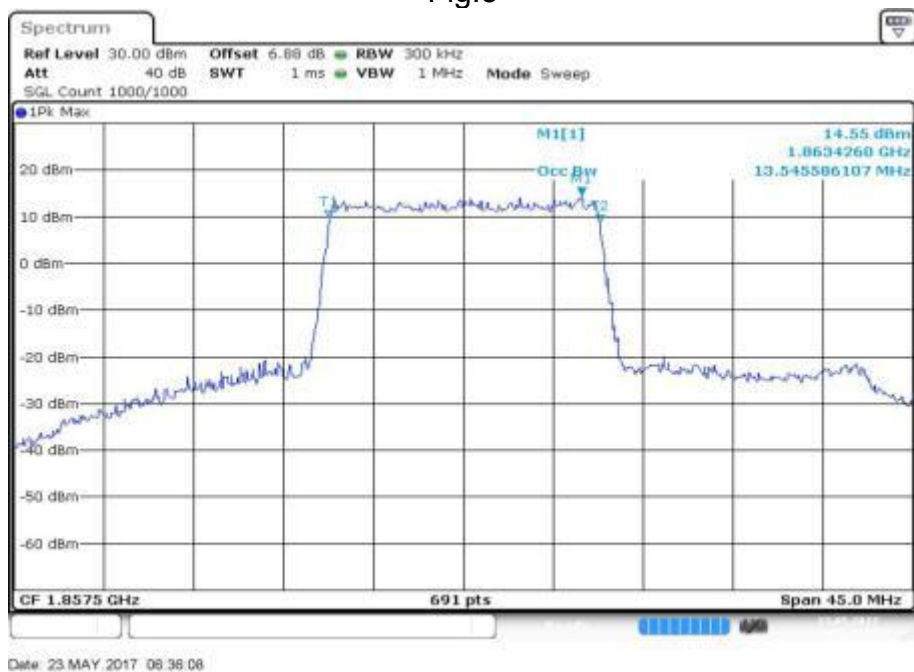


Fig.4

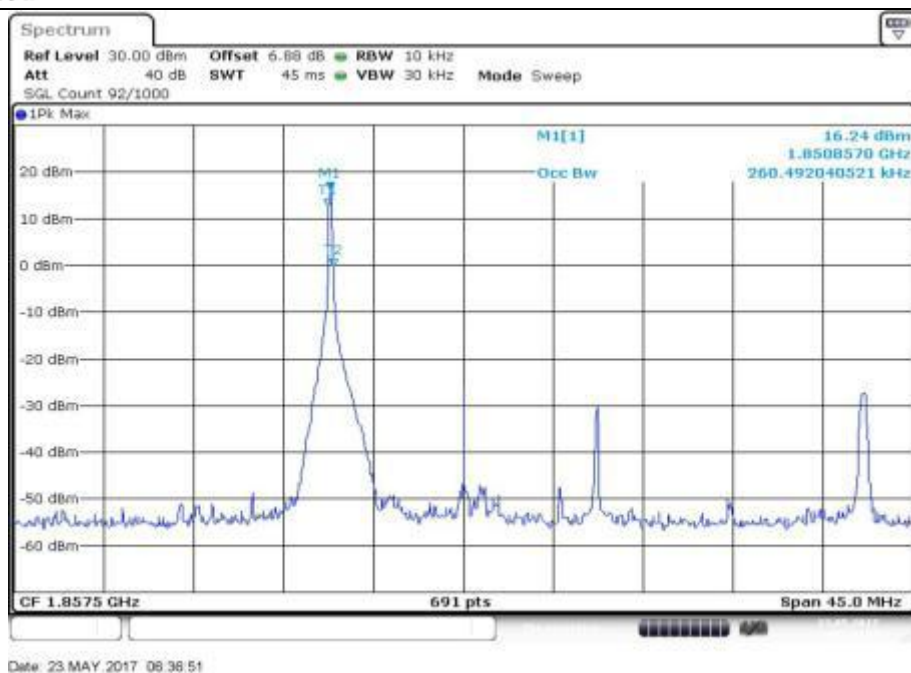


Fig.5

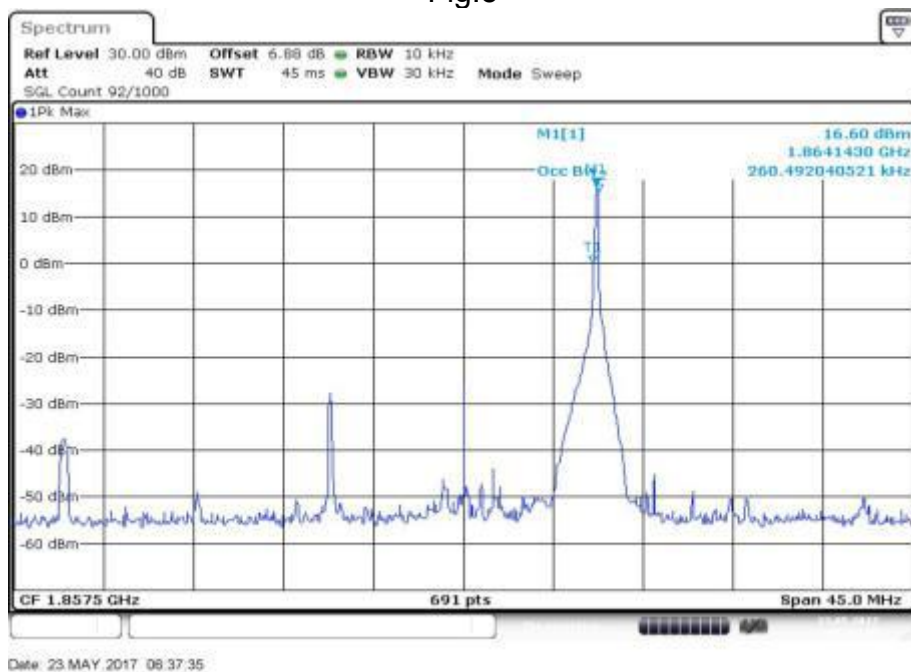


Fig.6

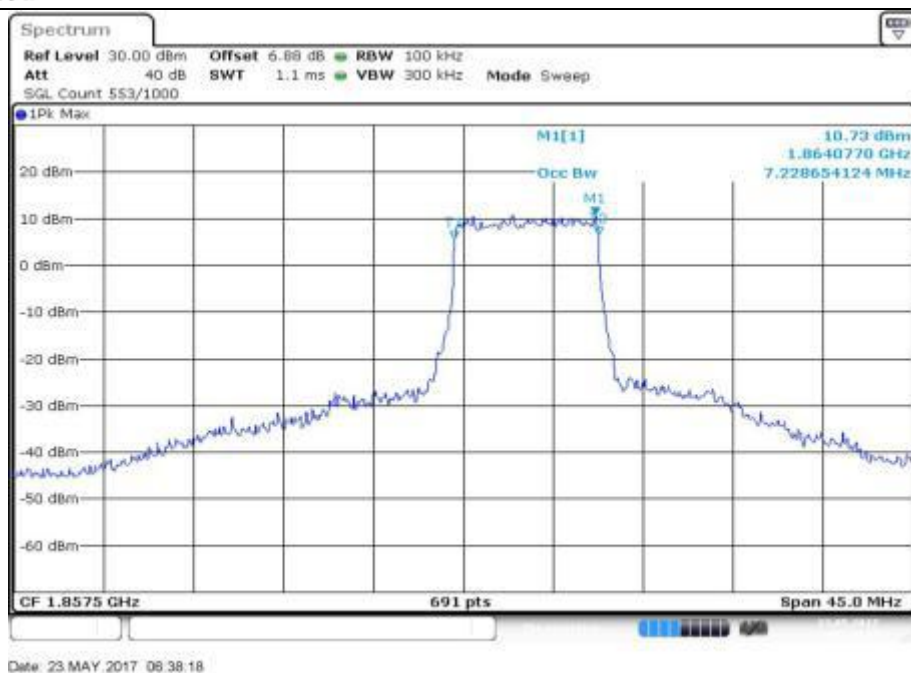


Fig.7

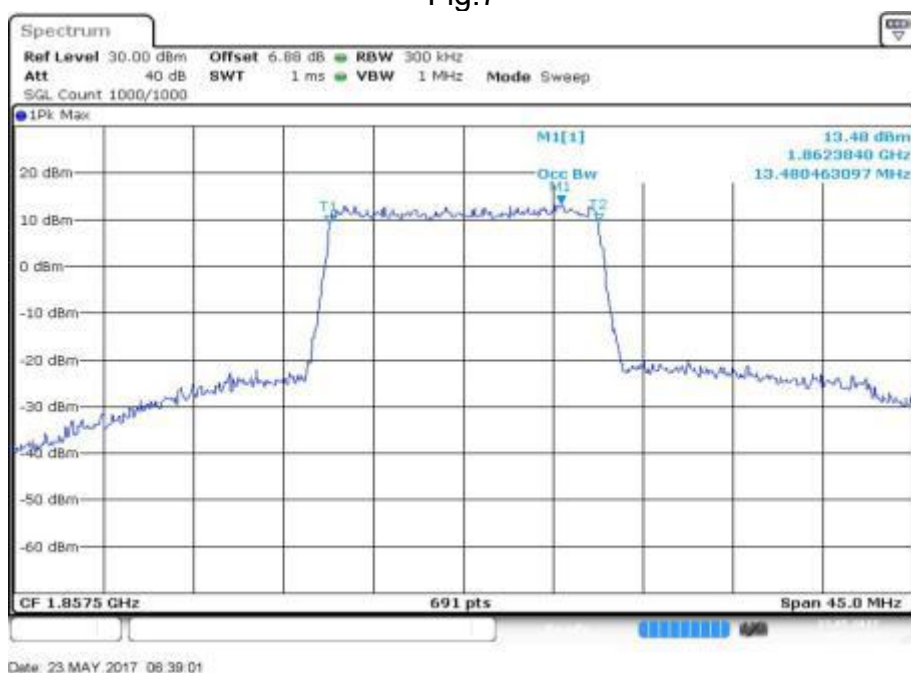


Fig.8

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	Bandwidth of 99% Power (MHz)			
						QPSK		16-QAM	
2	1880	18900	15	1	0	0.260	Fig.1	0.260	Fig.5
				1	74	0.260	Fig.2	0.260	Fig.6
				40	18	7.229	Fig.3	7.229	Fig.7
				75	0	13.480	Fig.4	13.480	Fig.8

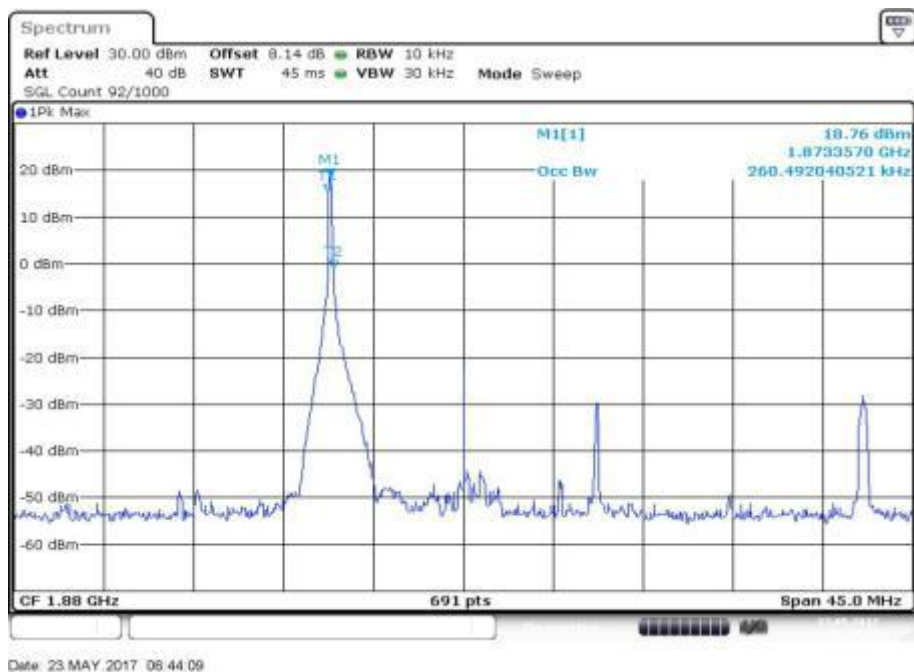


Fig.1

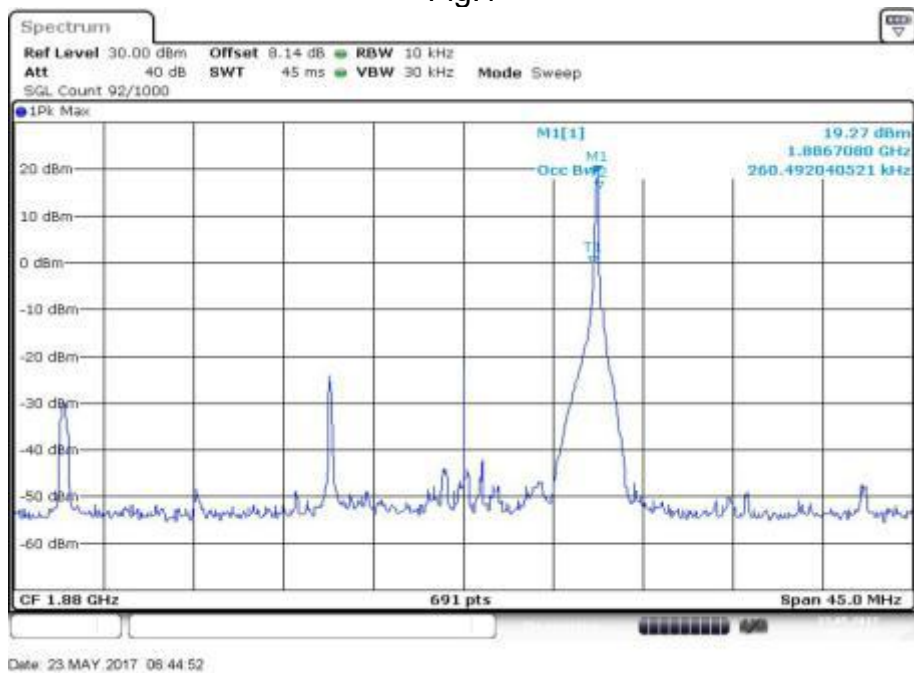


Fig.2

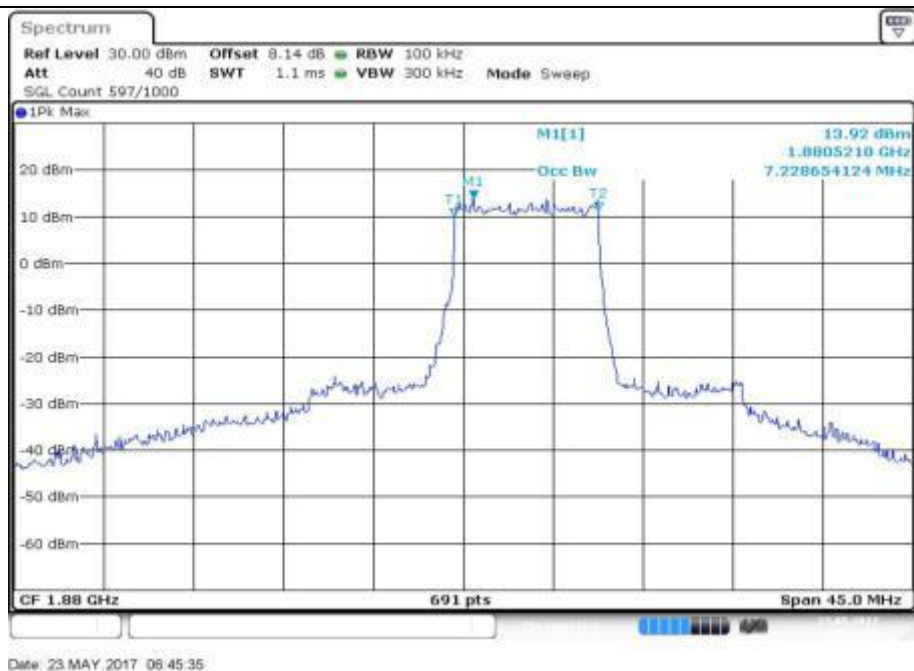


Fig.3

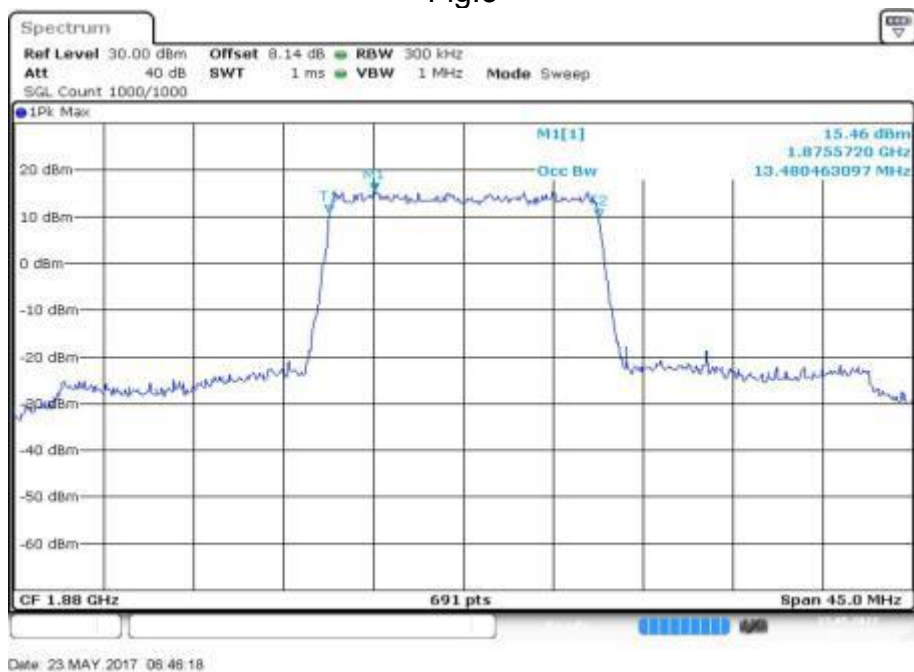


Fig.4

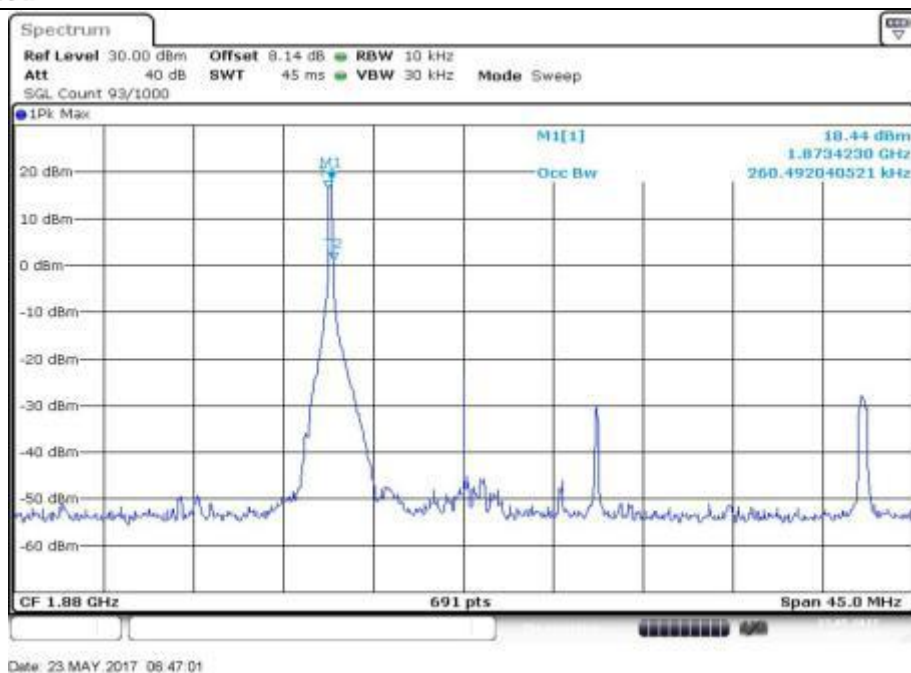


Fig.5

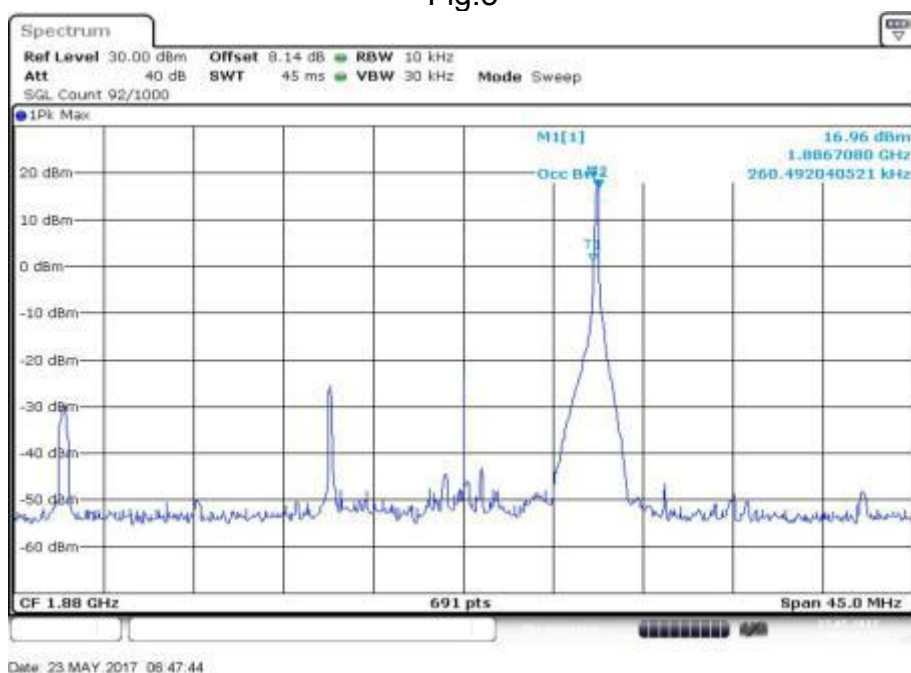


Fig.6



Fig.7

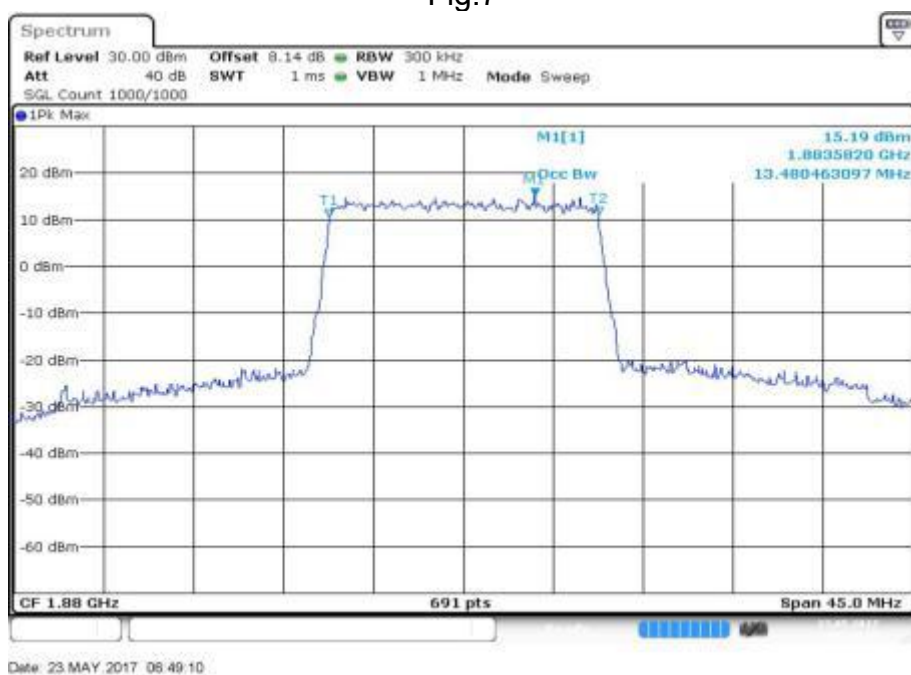


Fig.8

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	Bandwidth of 99% Power (MHz)			
						QPSK		16-QAM	
2	1902.5	19125	15	1	0	0.260	Fig.1	0.260	Fig.5
				1	74	0.260	Fig.2	0.260	Fig.6
				40	18	7.229	Fig.3	7.229	Fig.7
				75	0	13.480	Fig.4	13.546	Fig.8

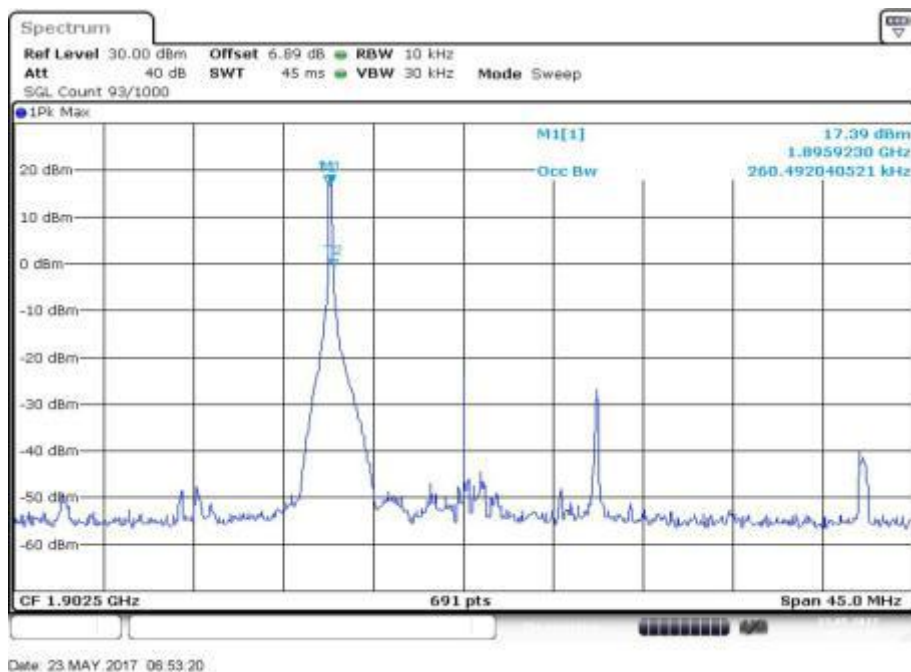


Fig.1

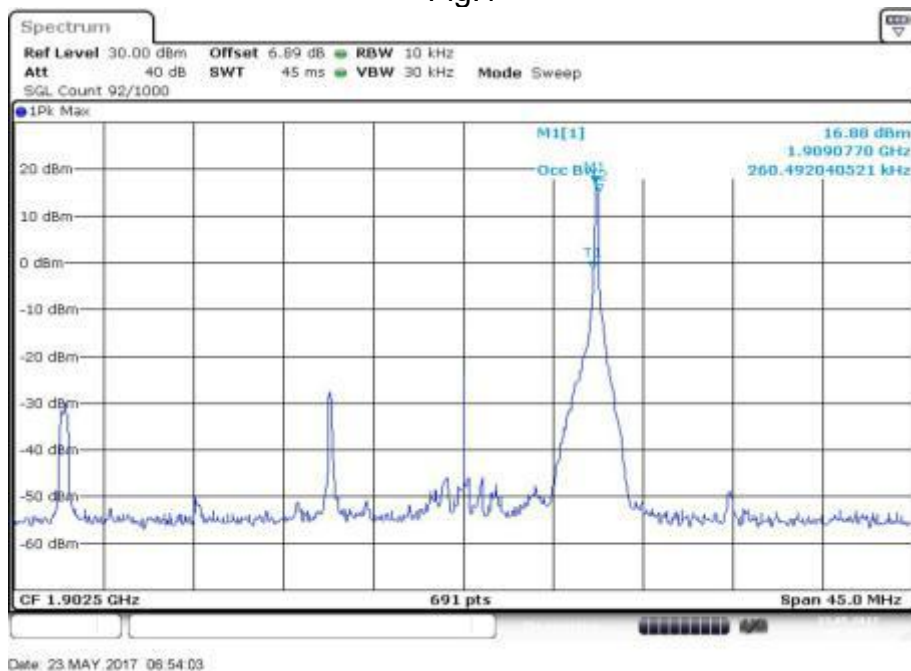


Fig.2

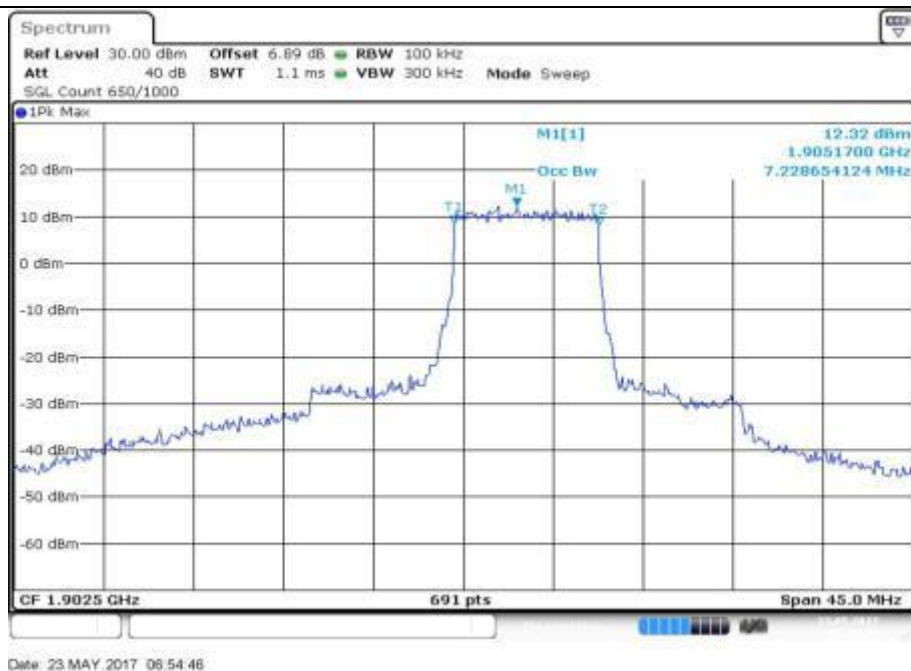


Fig.3

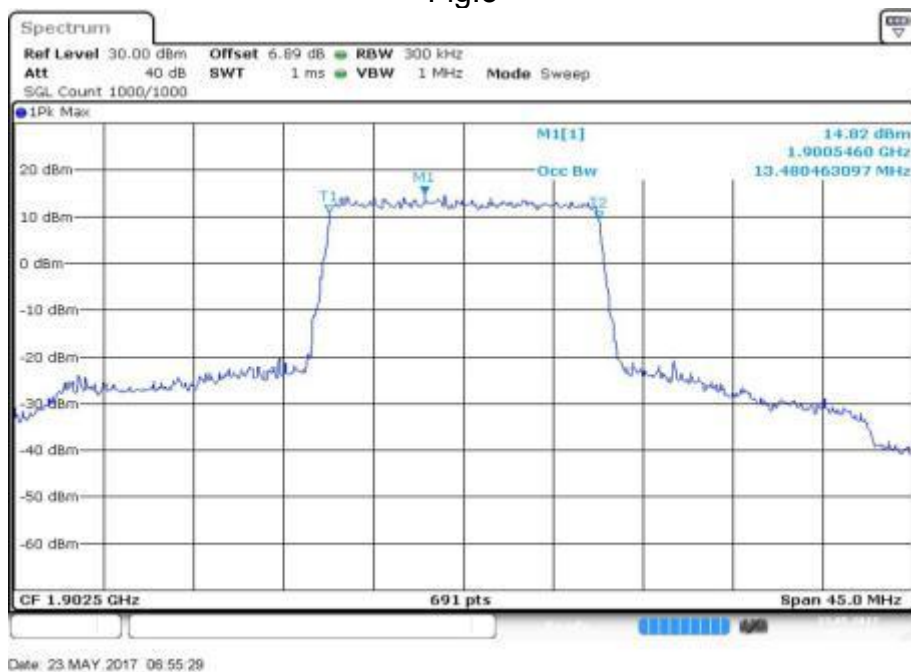


Fig.4

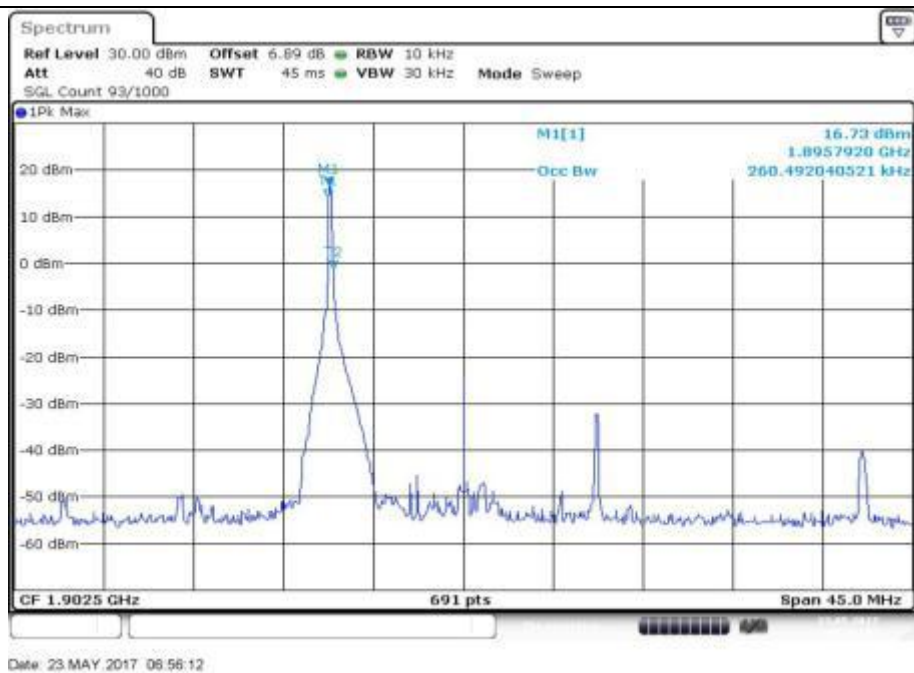


Fig.5

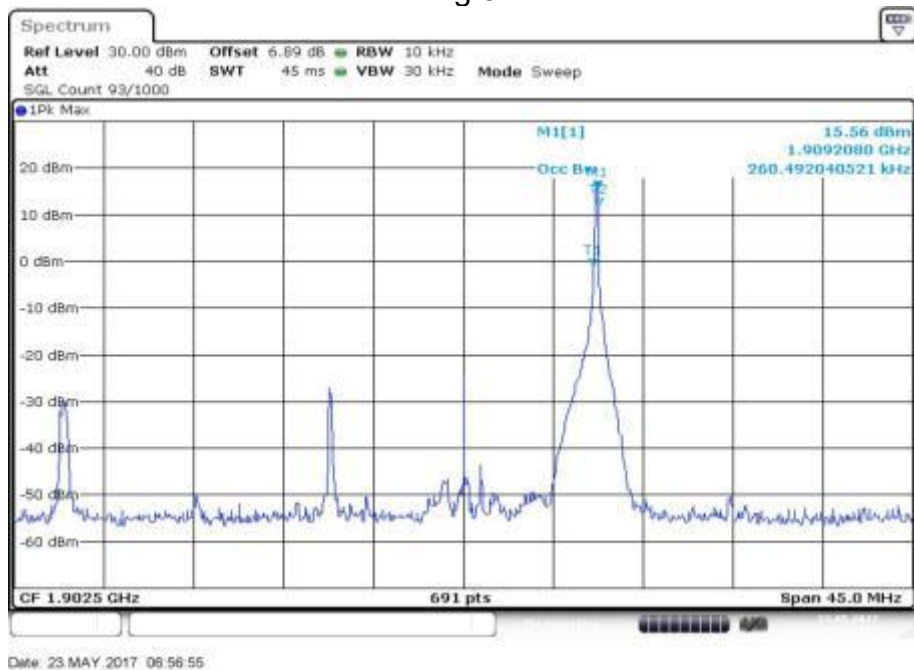


Fig.6

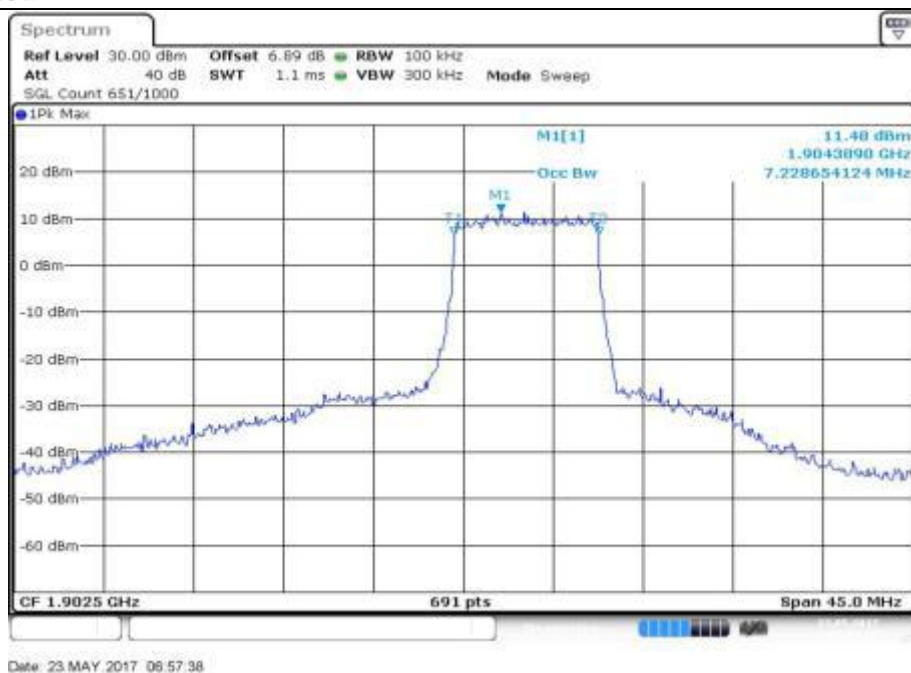


Fig.7

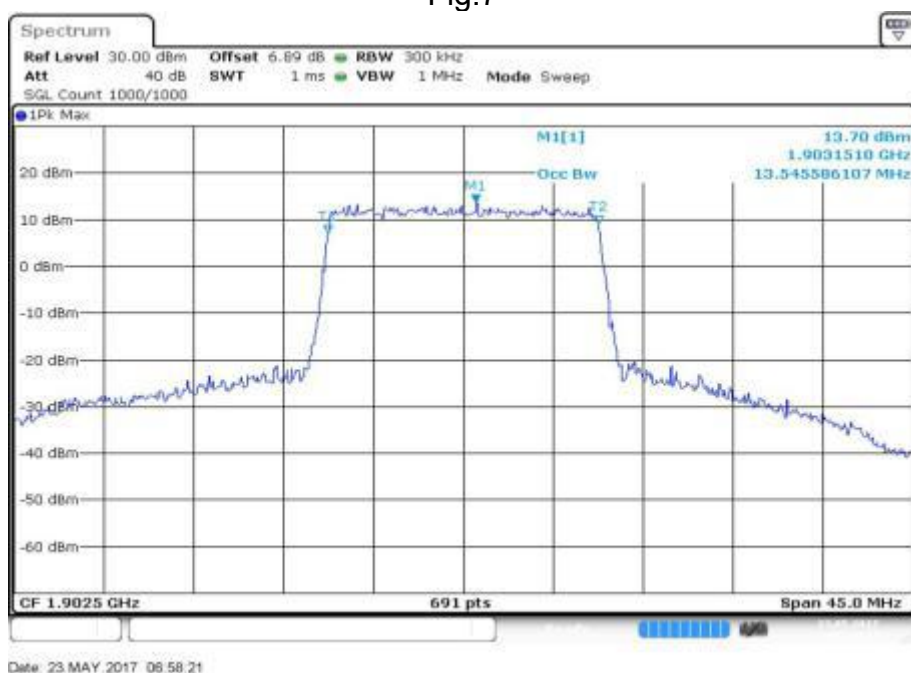


Fig.8

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	Bandwidth of 99% Power (MHz)			
						QPSK		16-QAM	
2	1860	18700	20	1	0	0.260	Fig.1	0.260	Fig.5
				1	99	0.260	Fig.2	0.260	Fig.6
				50	25	9.117	Fig.3	9.117	Fig.7
				100	0	17.974	Fig.4	17.974	Fig.8

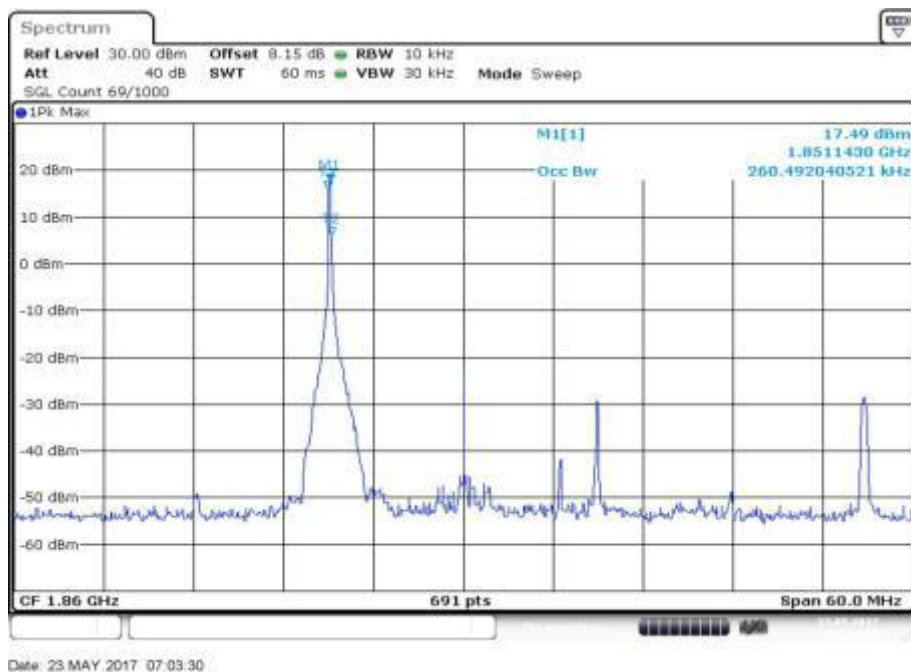


Fig.1

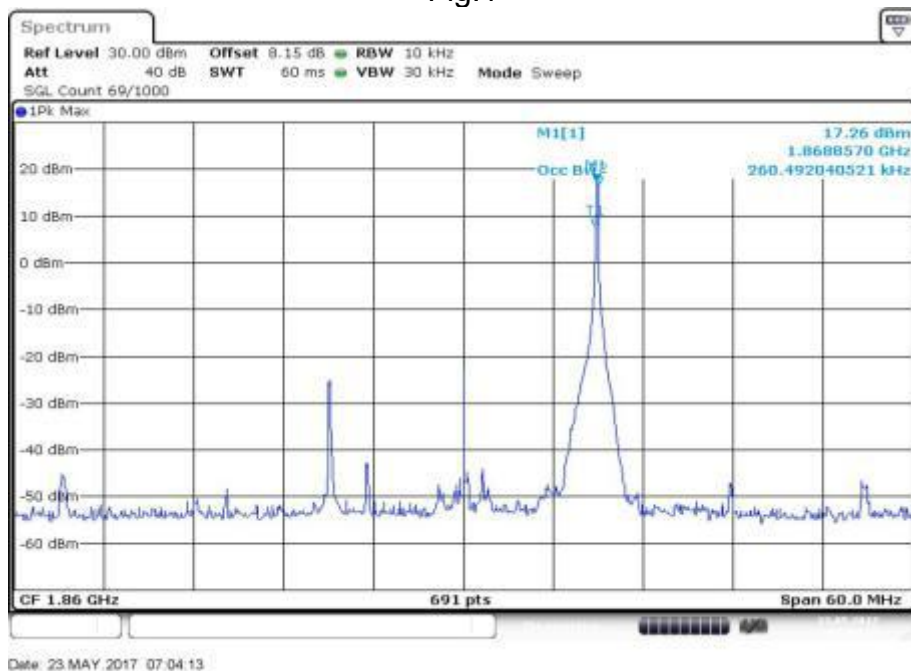


Fig.2

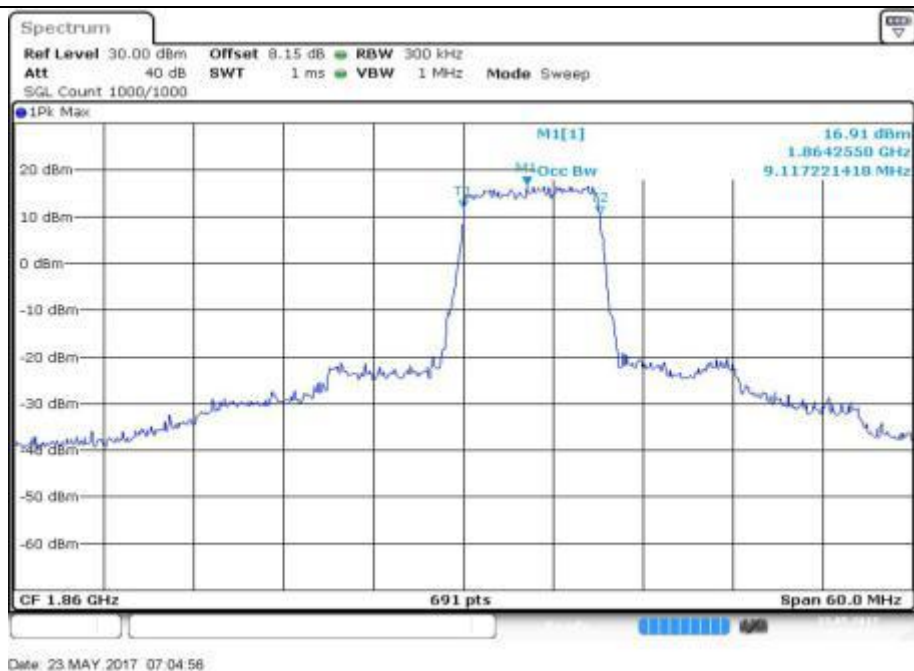


Fig.3

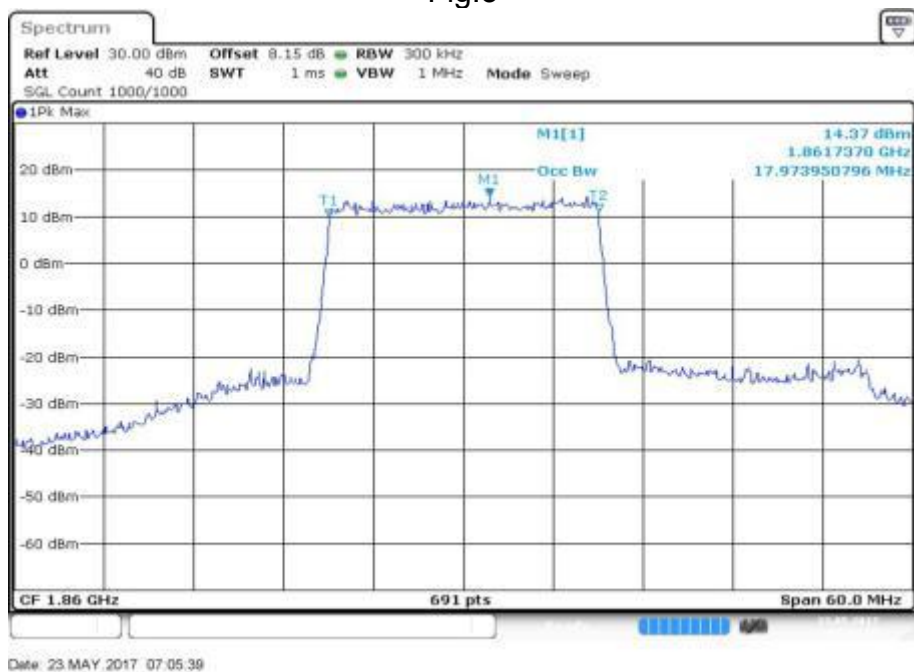


Fig.4

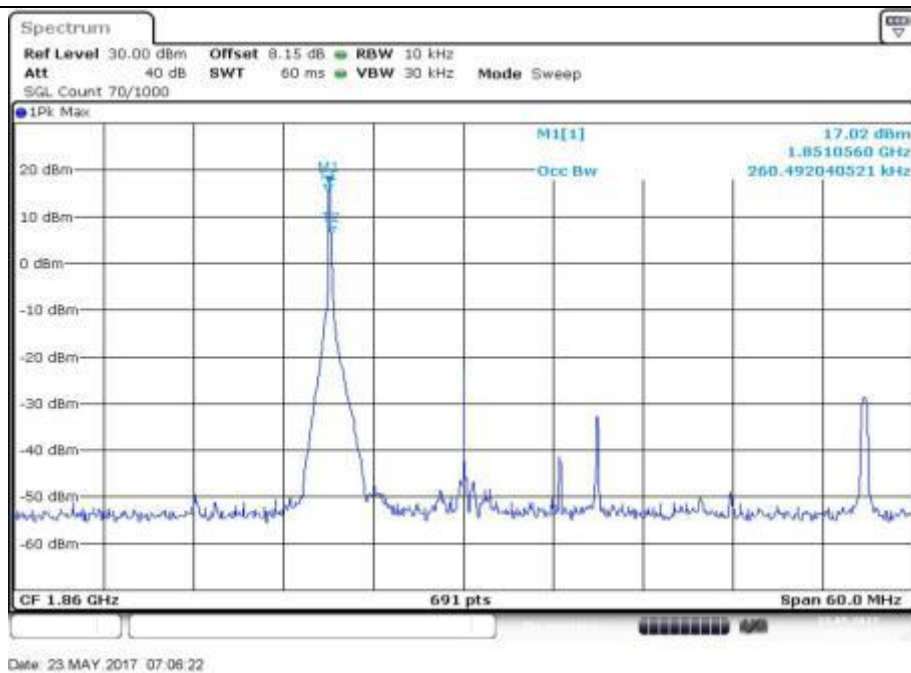


Fig.5

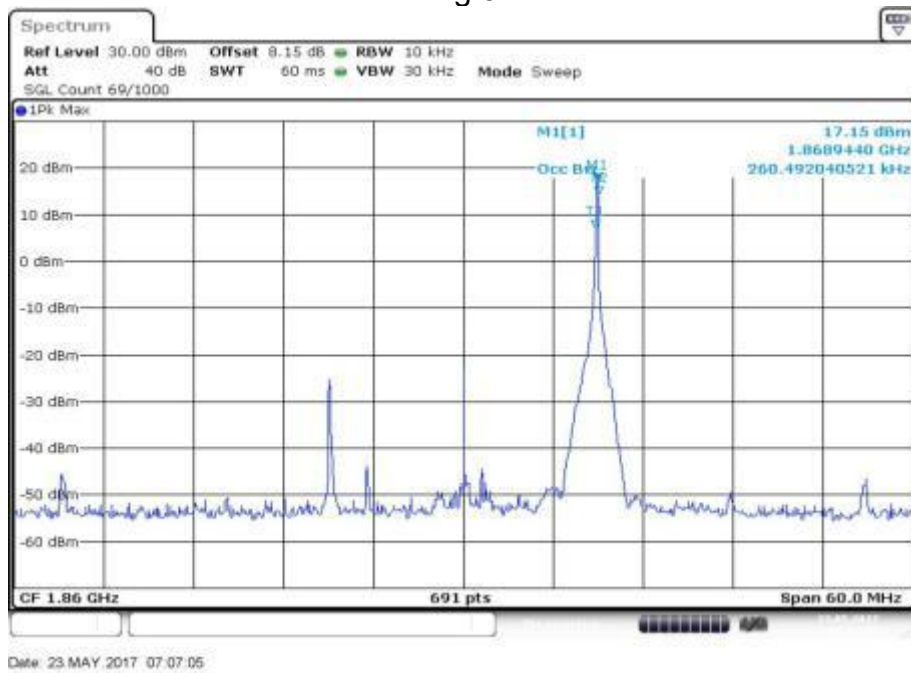


Fig.6

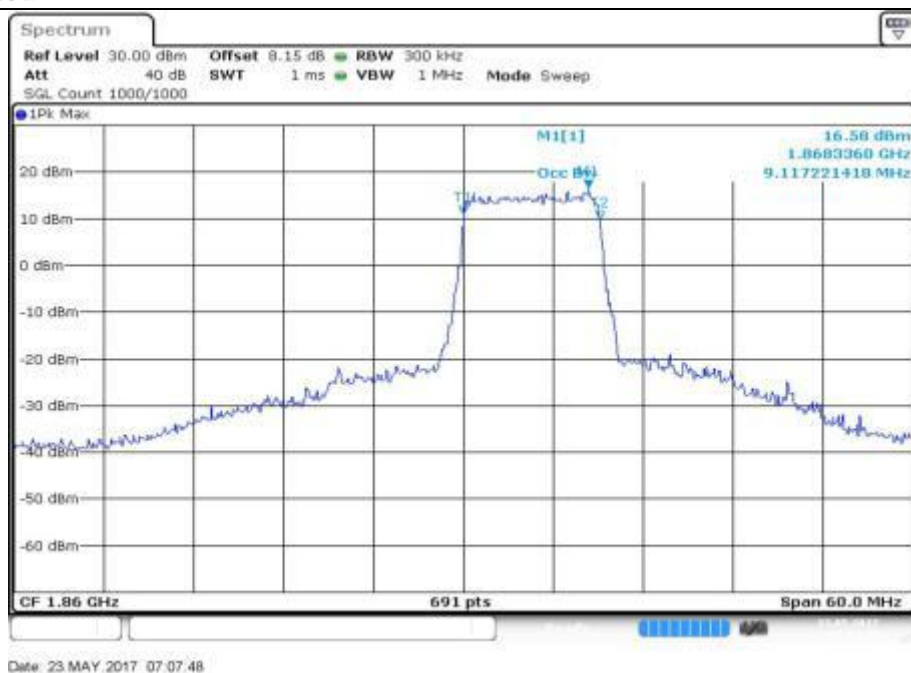


Fig.7

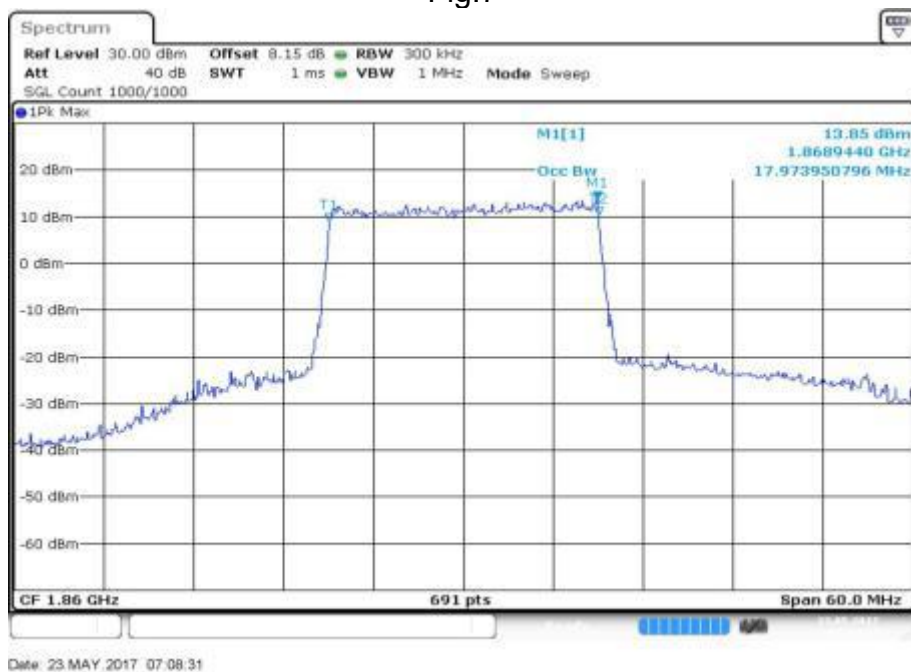


Fig.8

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	Bandwidth of 99% Power (MHz)			
						QPSK		16-QAM	
2	1880	18900	20	1	0	0.260	Fig.1	0.260	Fig.5
				1	99	0.260	Fig.2	0.260	Fig.6
				50	25	9.117	Fig.3	9.117	Fig.7
				100	0	17.974	Fig.4	17.974	Fig.8

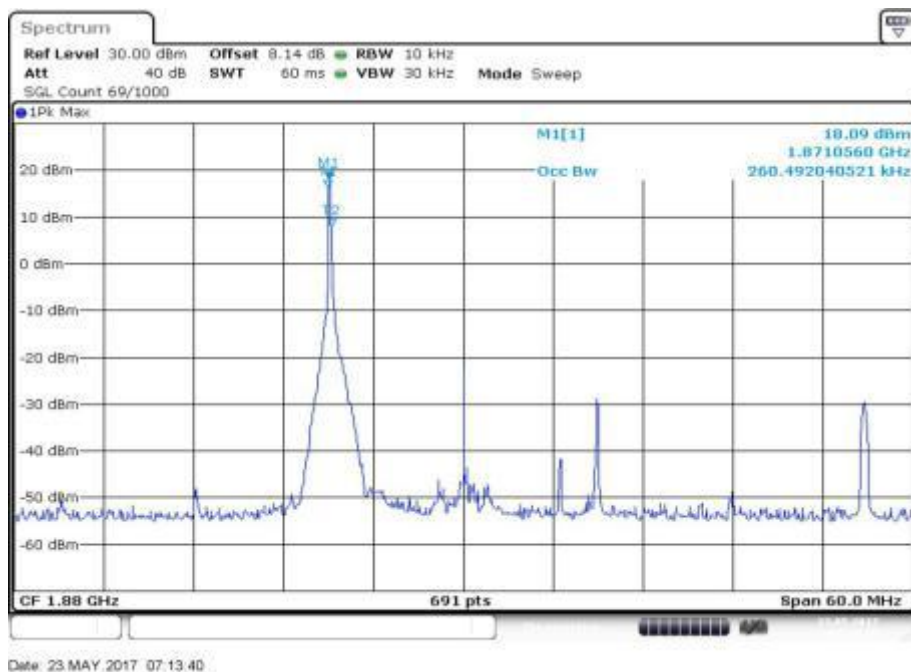


Fig.1

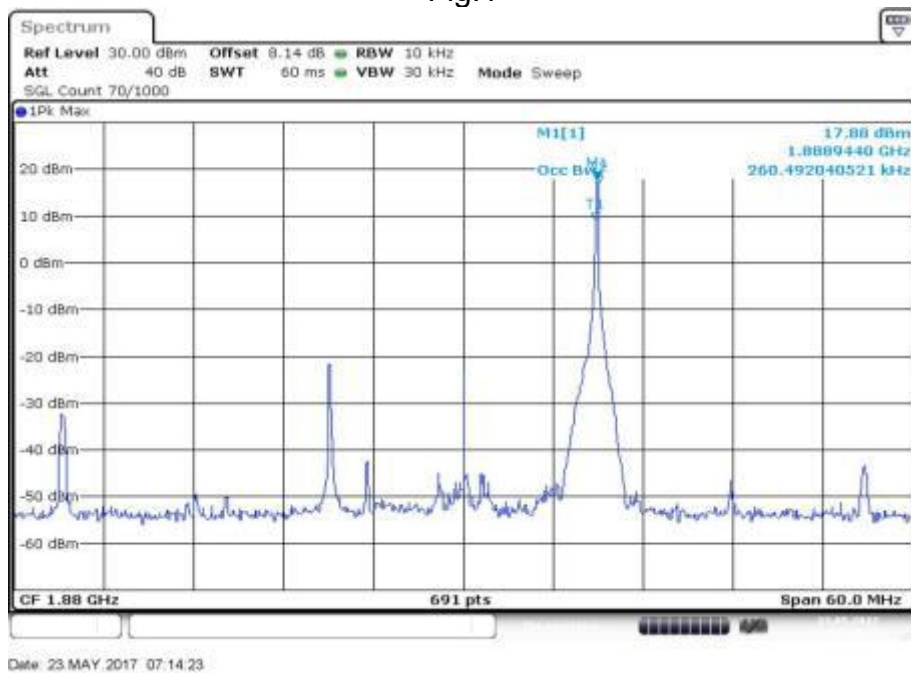


Fig.2

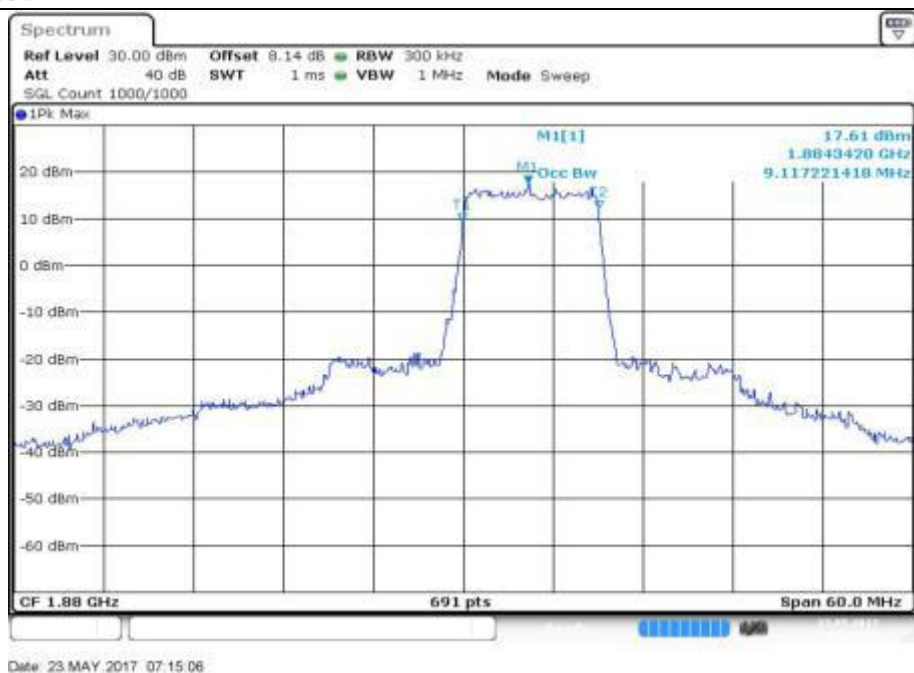


Fig.3

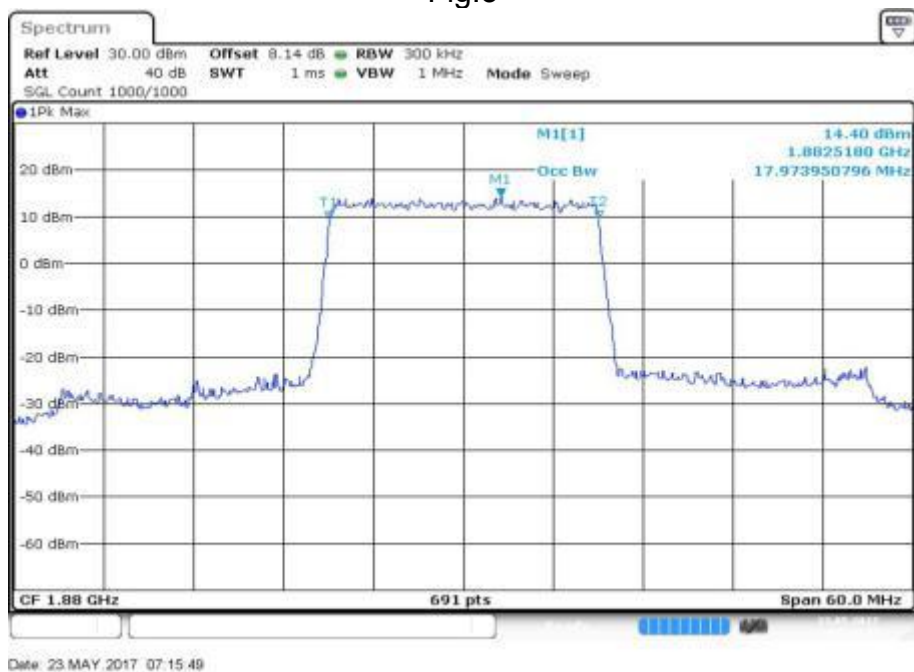


Fig.4

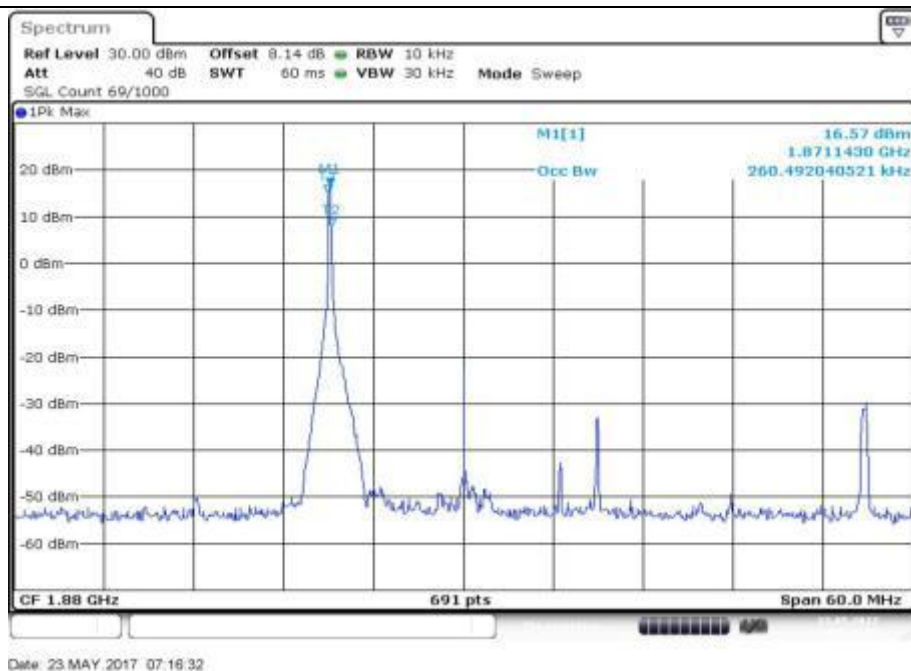


Fig.5

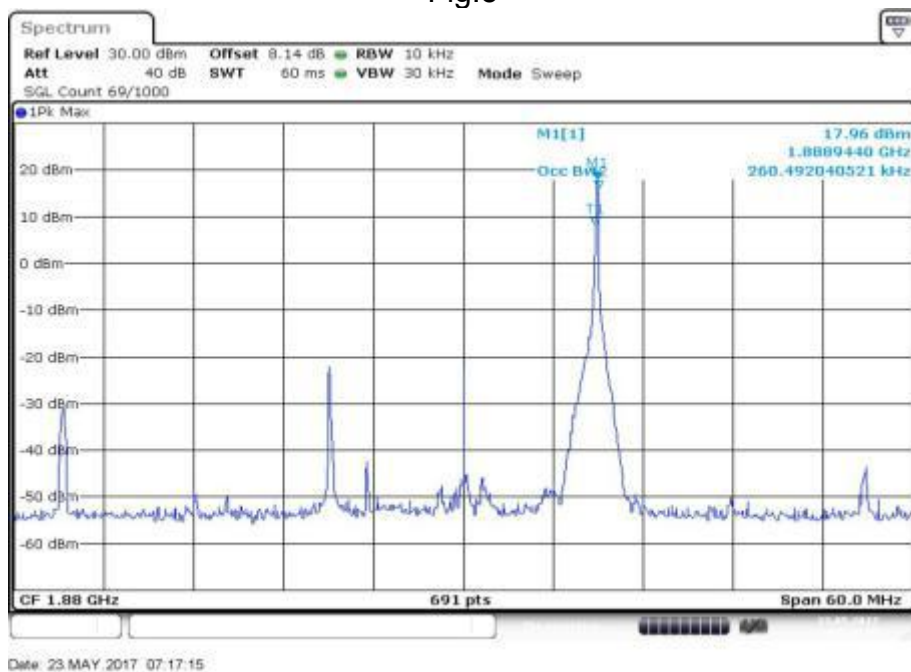


Fig.6



Fig.7

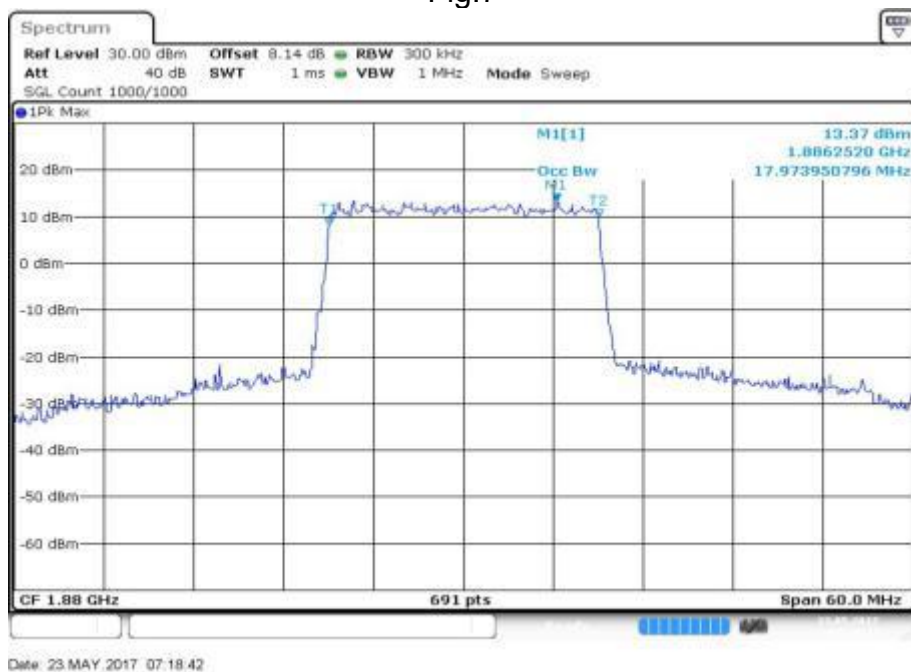


Fig.8

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	Bandwidth of 99% Power (MHz)			
						QPSK		16-QAM	
2	1900	19100	20	1	0	0.260	Fig.1	0.260	Fig.5
				1	99	0.260	Fig.2	0.260	Fig.6
				50	25	9.117	Fig.3	9.204	Fig.7
				100	0	17.974	Fig.4	17.974	Fig.8

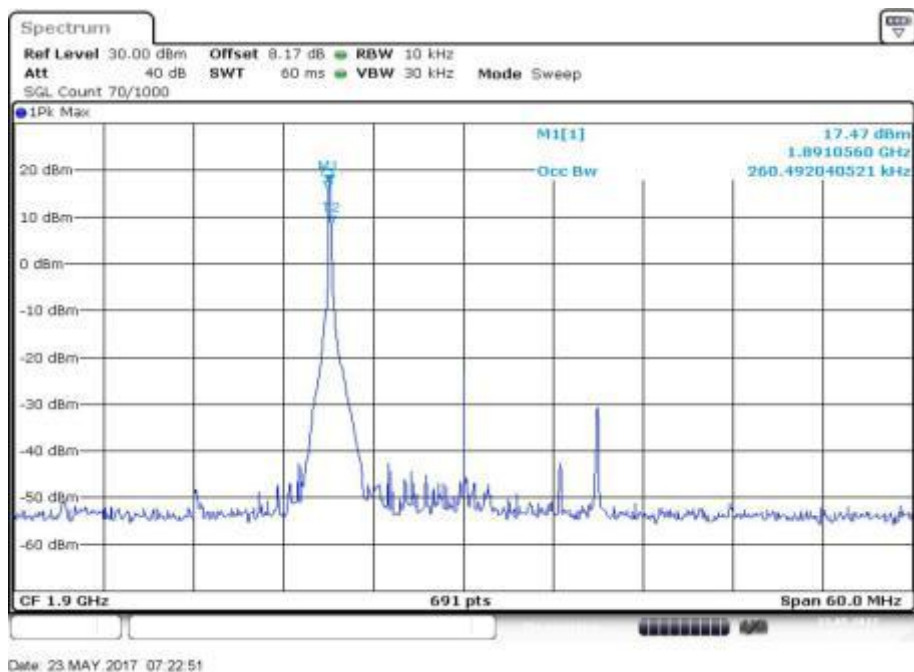


Fig.1

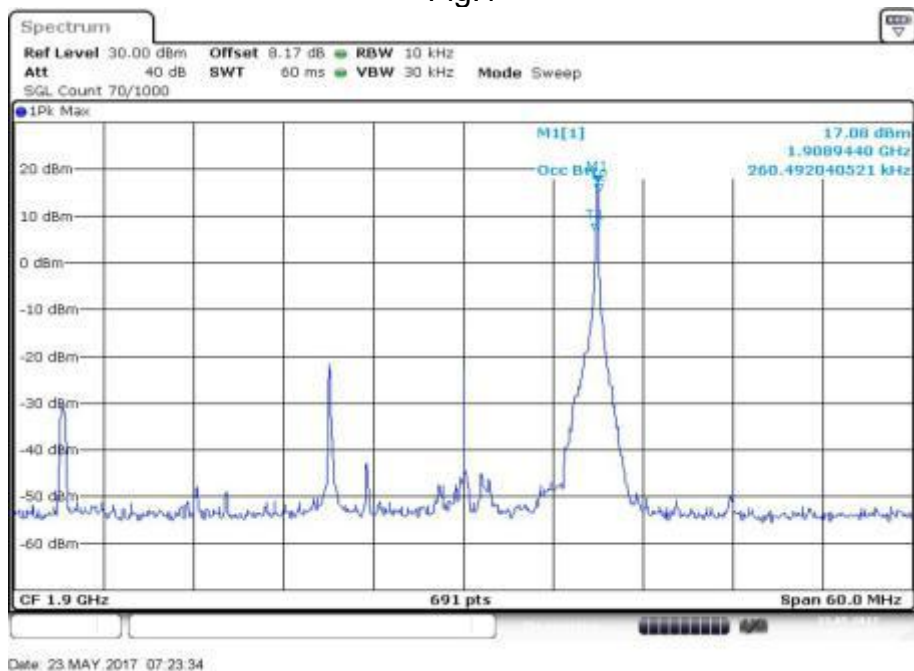


Fig.2

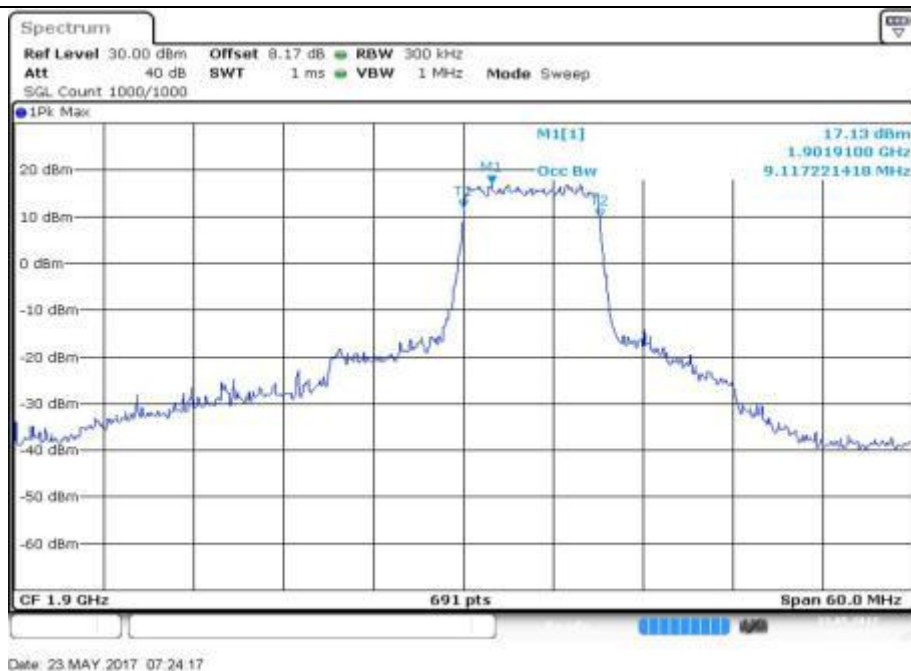


Fig.3

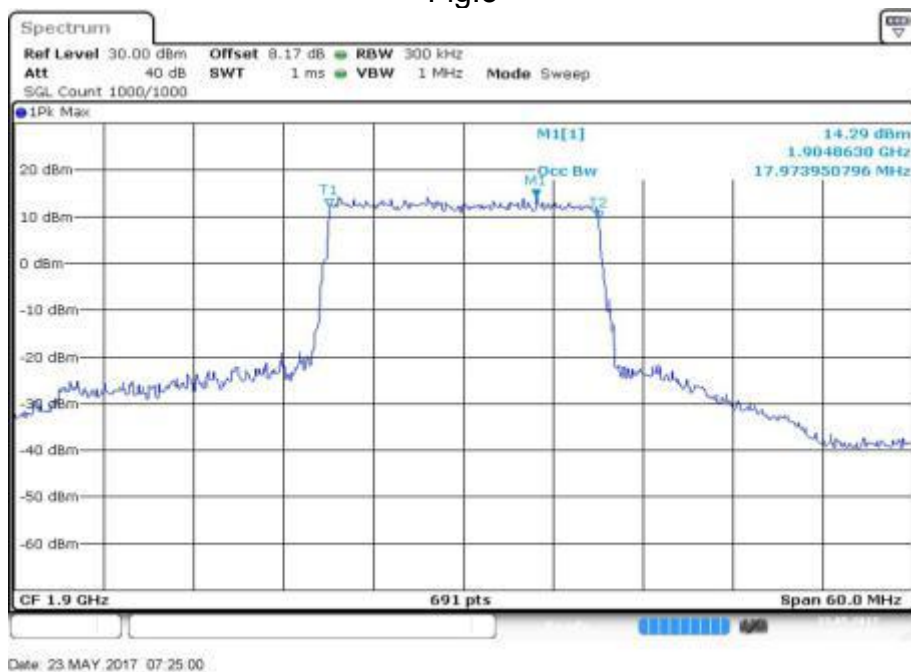


Fig.4

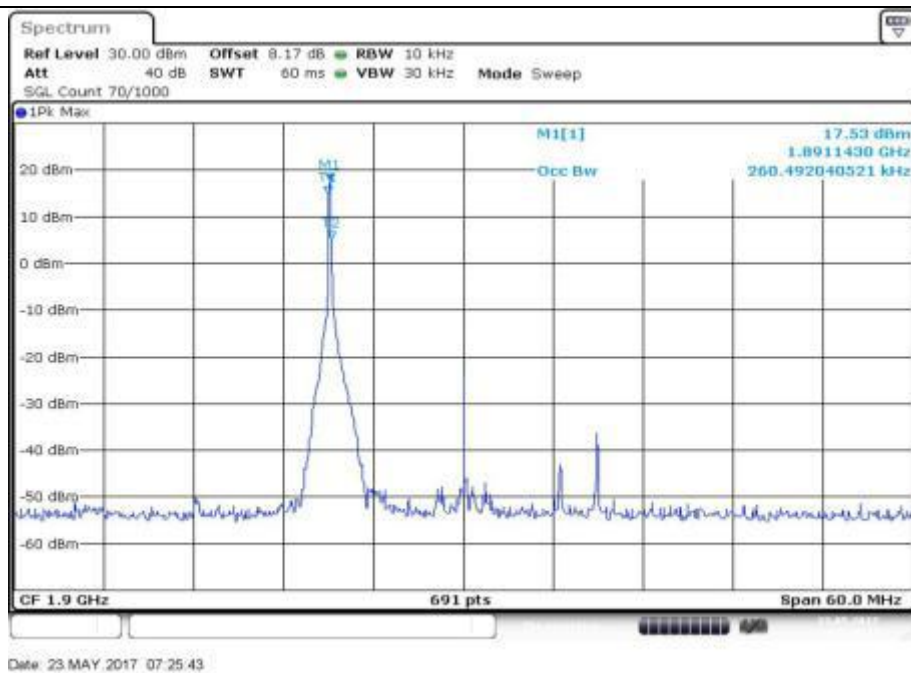


Fig.5

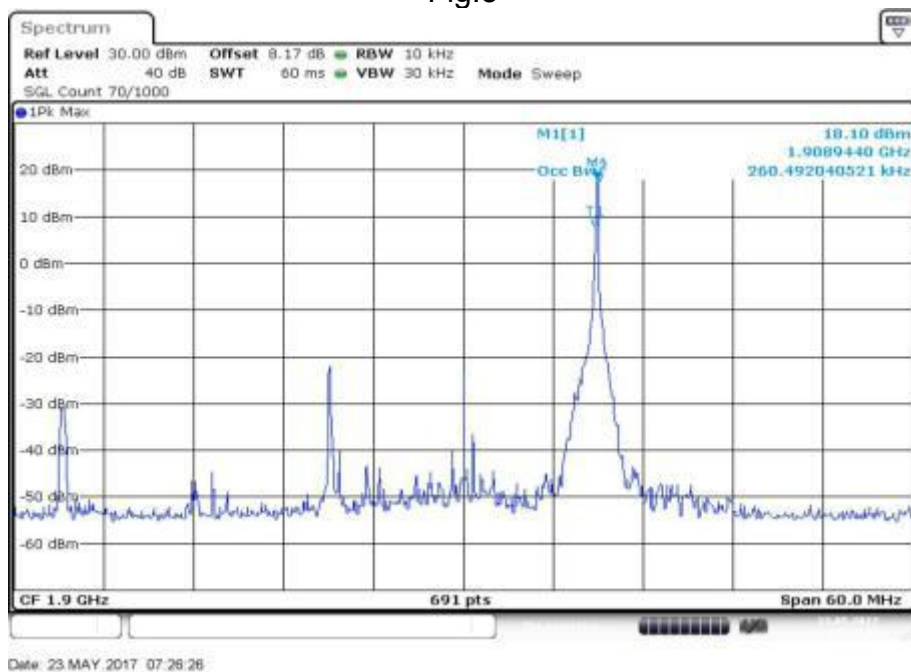


Fig.6

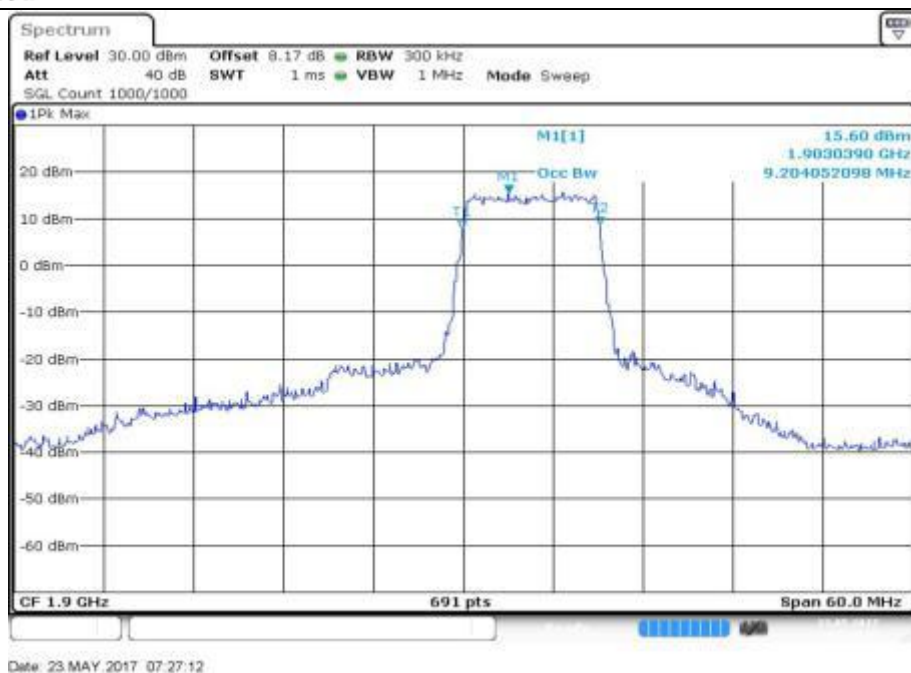


Fig.7

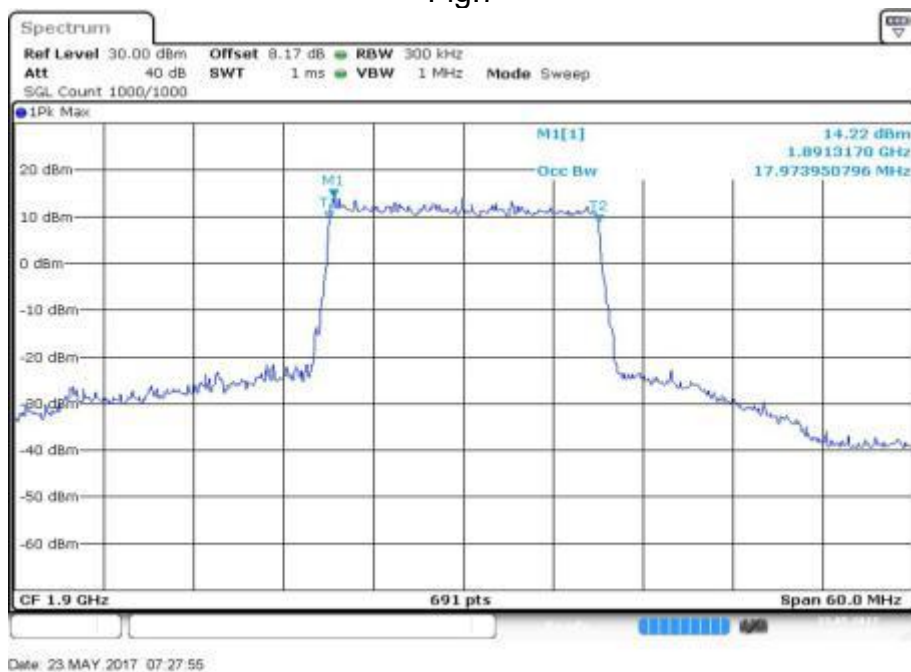


Fig.8

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	Bandwidth of 99% Power (MHz)			
						QPSK		16-QAM	
4	1710.7	19957	1.4	1	0	0.213	Fig.1	0.219	Fig.5
				1	5	0.213	Fig.2	0.219	Fig.6
				3	2	0.571	Fig.3	0.577	Fig.7
				6	0	1.100	Fig.4	1.100	Fig.8

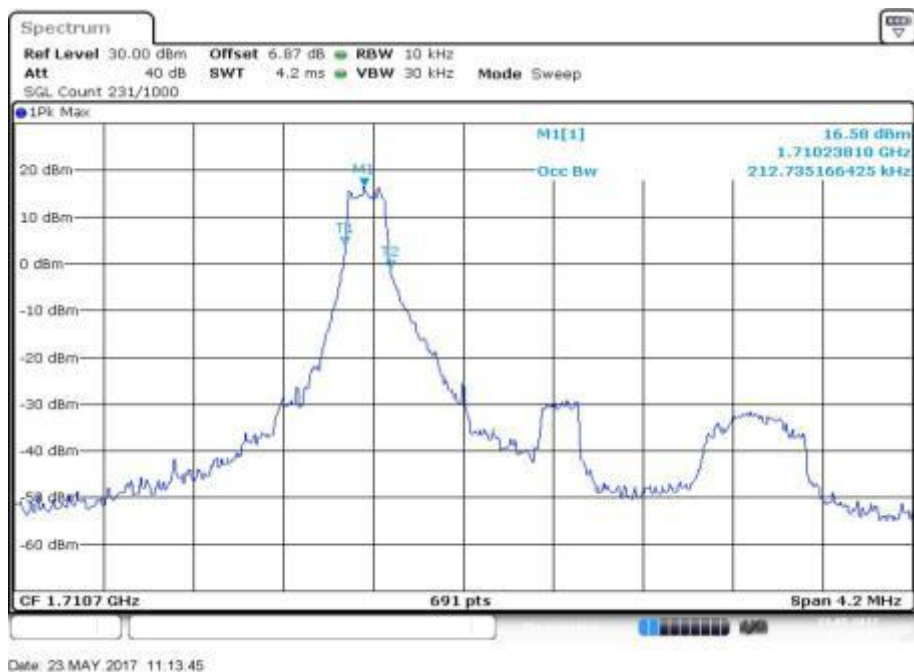


Fig.1



Fig.2



Fig.3



Fig.4



Fig.5



Fig.6



Fig.7

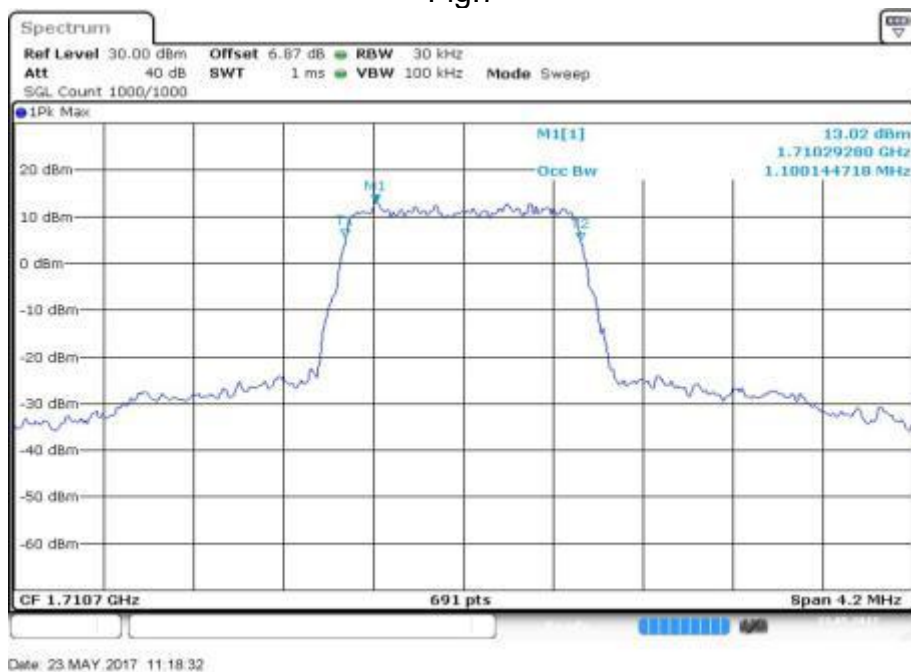


Fig.8

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	Bandwidth of 99% Power (MHz)			
						QPSK		16-QAM	
4	1732.5	20175	1.4	1	0	0.213	Fig.1	0.219	Fig.5
				1	5	0.213	Fig.2	0.219	Fig.6
				3	2	0.565	Fig.3	0.577	Fig.7
				6	0	1.094	Fig.4	1.094	Fig.8

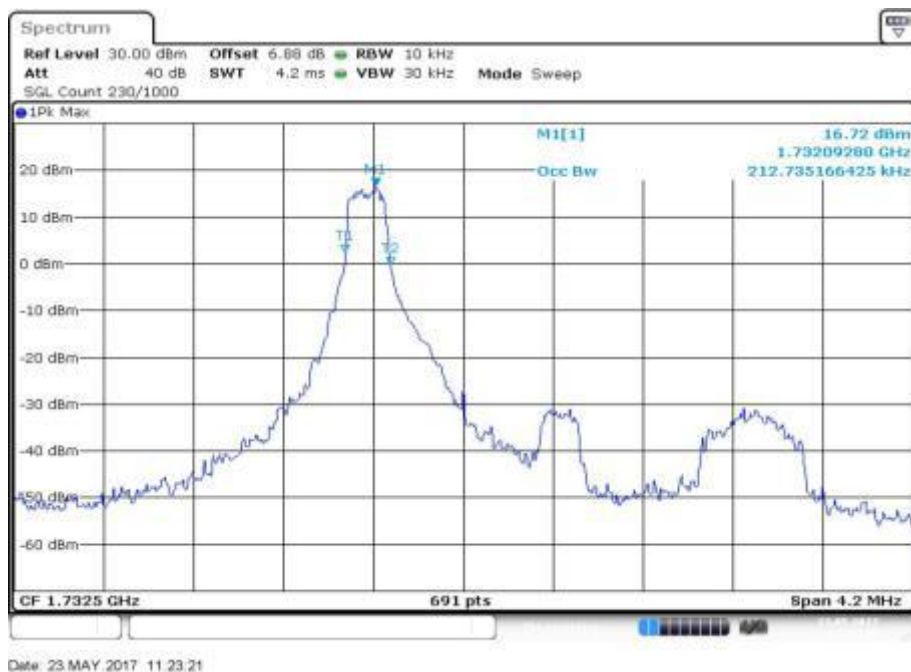


Fig.1



Fig.2



Fig.3



Fig.4



Fig.5



Fig.6

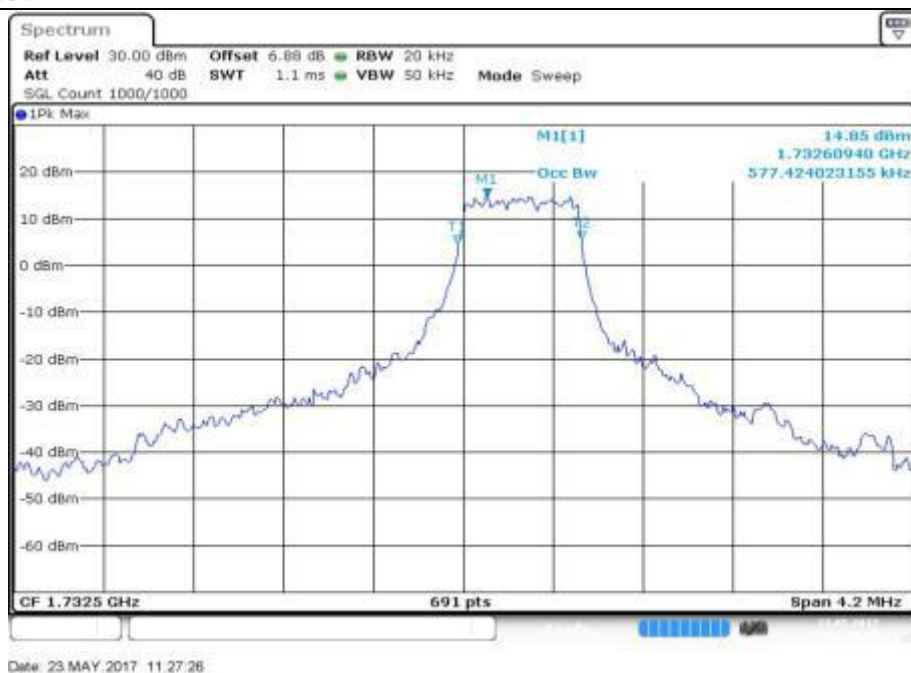


Fig.7



Fig.8

Band	Carrier frequency (MHz)	Channel (High)	BW	RB Size	RB Offset	Bandwidth of 99% Power (MHz)			
						QPSK		16-QAM	
4	1754.3	20393	1.4	1	0	0.213	Fig.1	0.225	Fig.5
				1	5	0.213	Fig.2	0.213	Fig.6
				3	2	0.571	Fig.3	0.565	Fig.7
				6	0	1.100	Fig.4	1.094	Fig.8

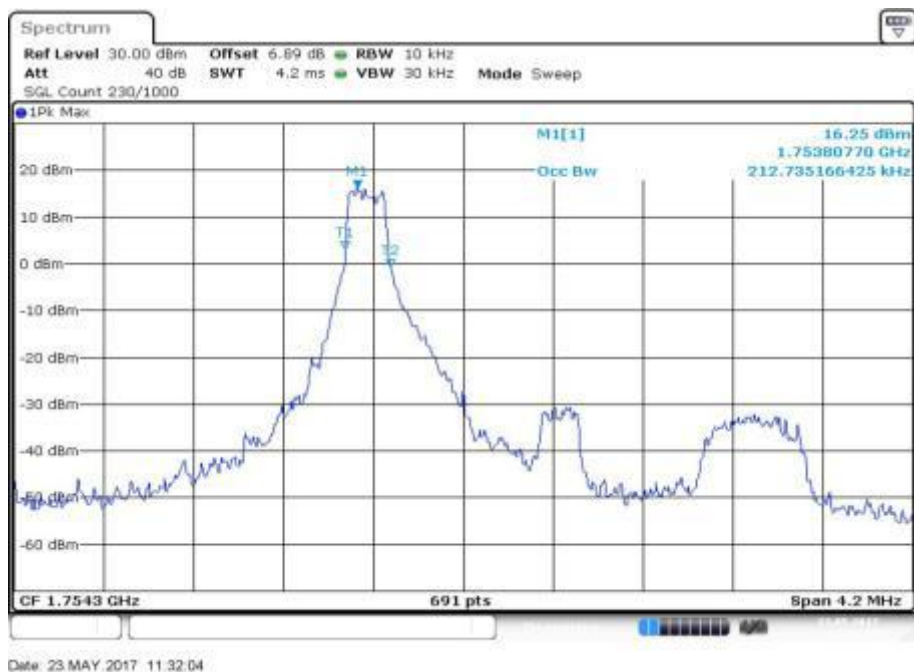


Fig.1



Fig.2



Fig.3



Fig.4



Fig.5

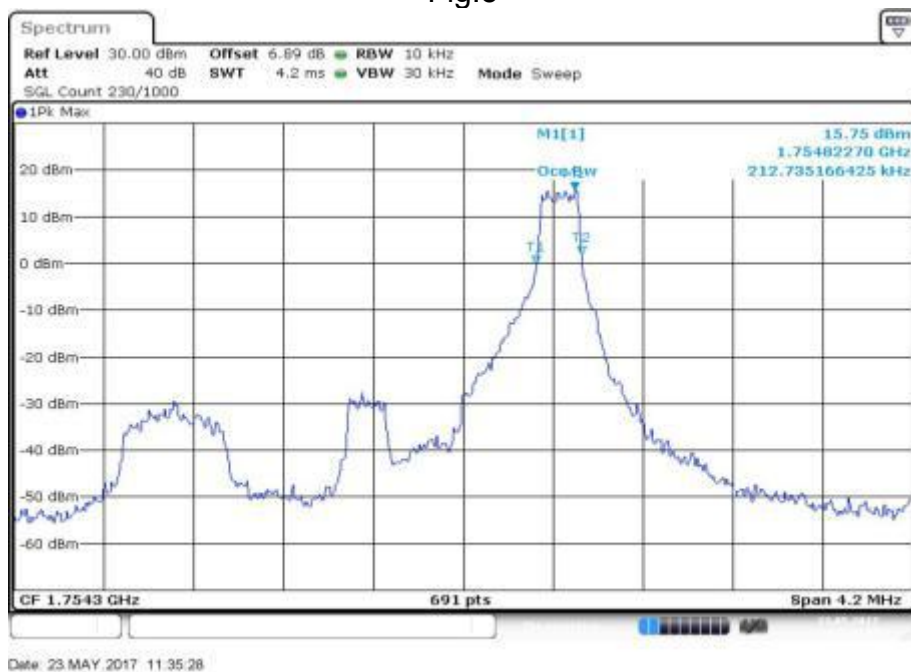


Fig.6

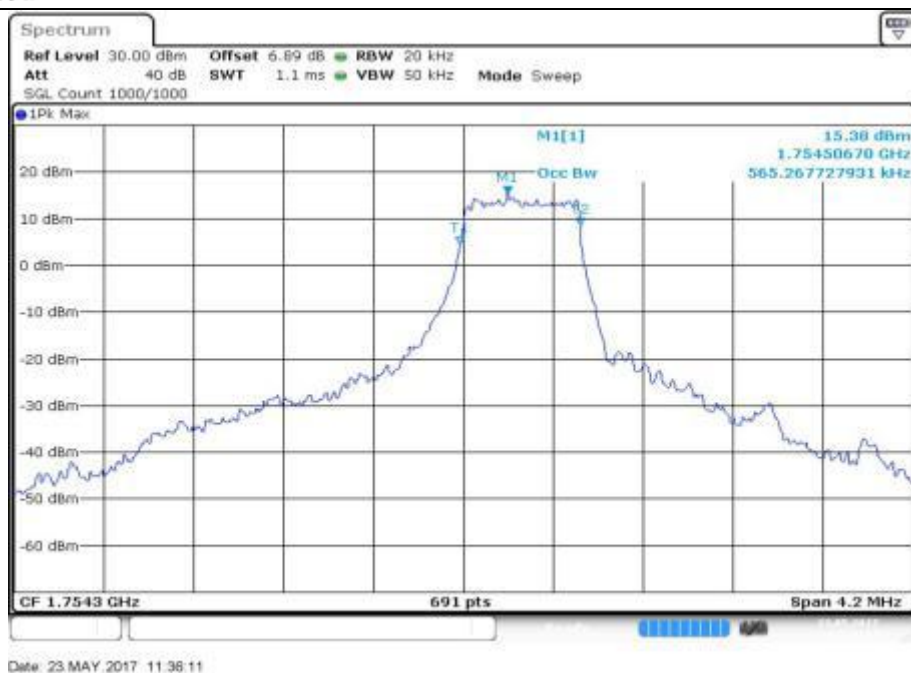


Fig.7

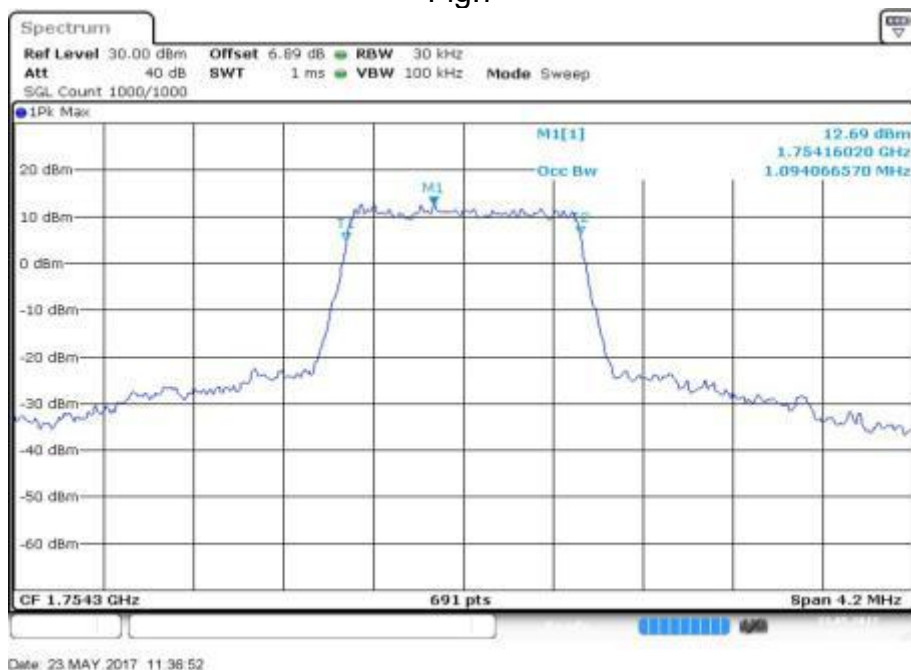


Fig.8

Band	Carrier frequency (MHz)	Channel (Low)	BW	RB Size	RB Offset	Bandwidth of 99% Power (MHz)			
						QPSK		16-QAM	
4	1711.5	19965	3	1	0	0.221	Fig.1	0.221	Fig.5
				1	14	0.221	Fig.2	0.221	Fig.6
				8	4	1.459	Fig.3	1.472	Fig.7
				15	0	2.748	Fig.4	2.748	Fig.8

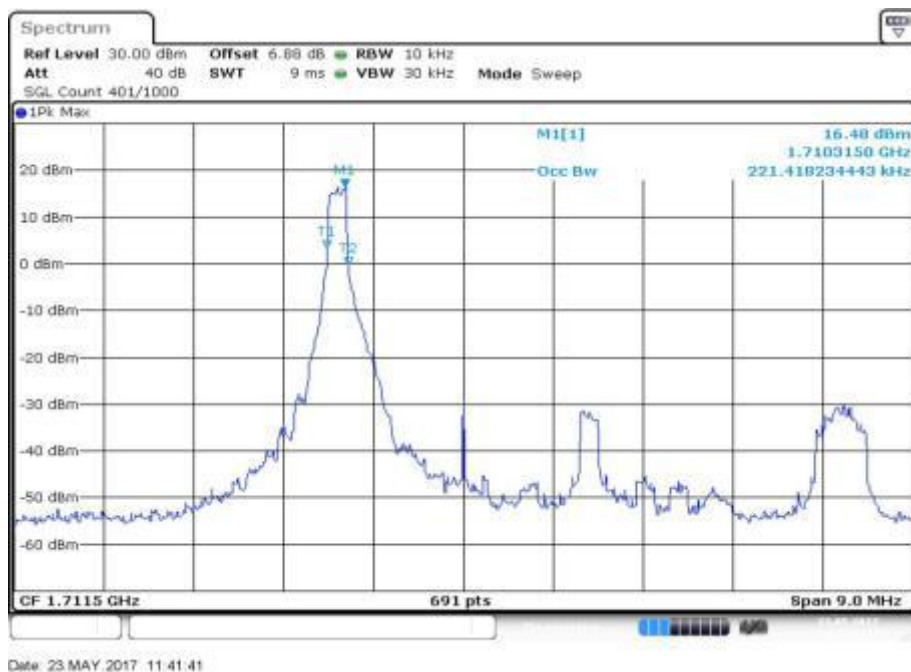


Fig.1

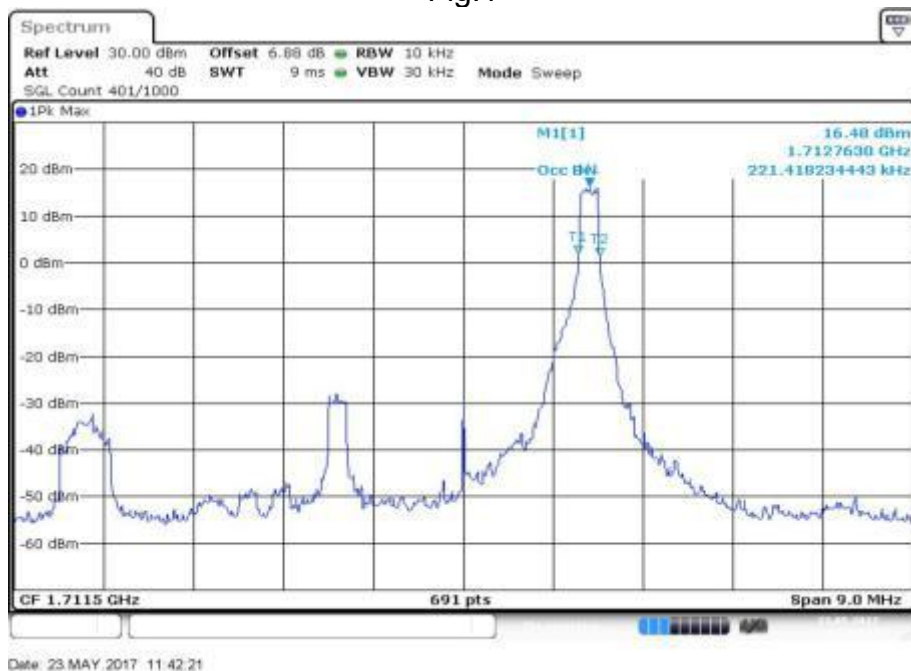


Fig.2



Fig.3

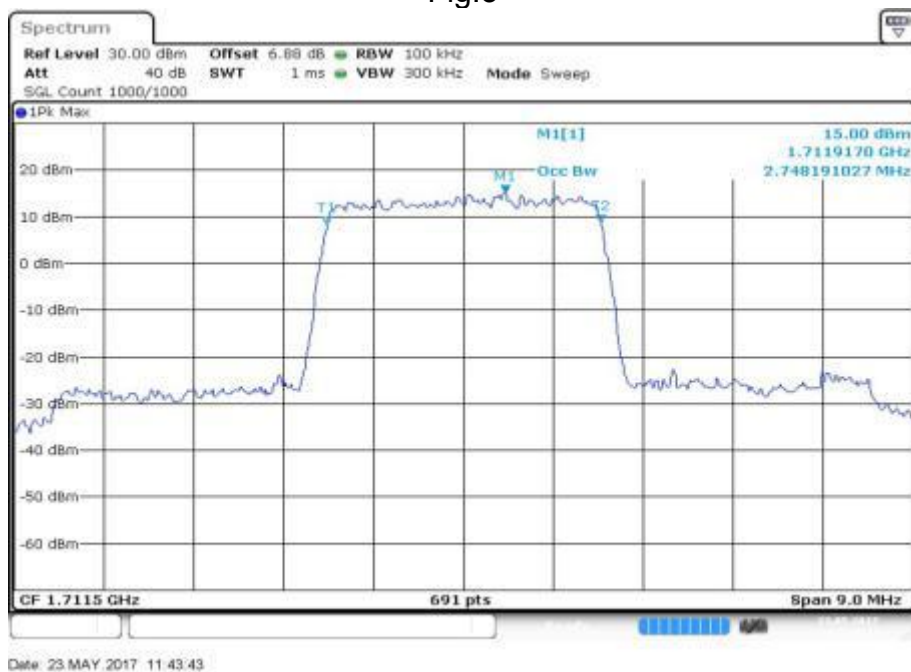


Fig.4

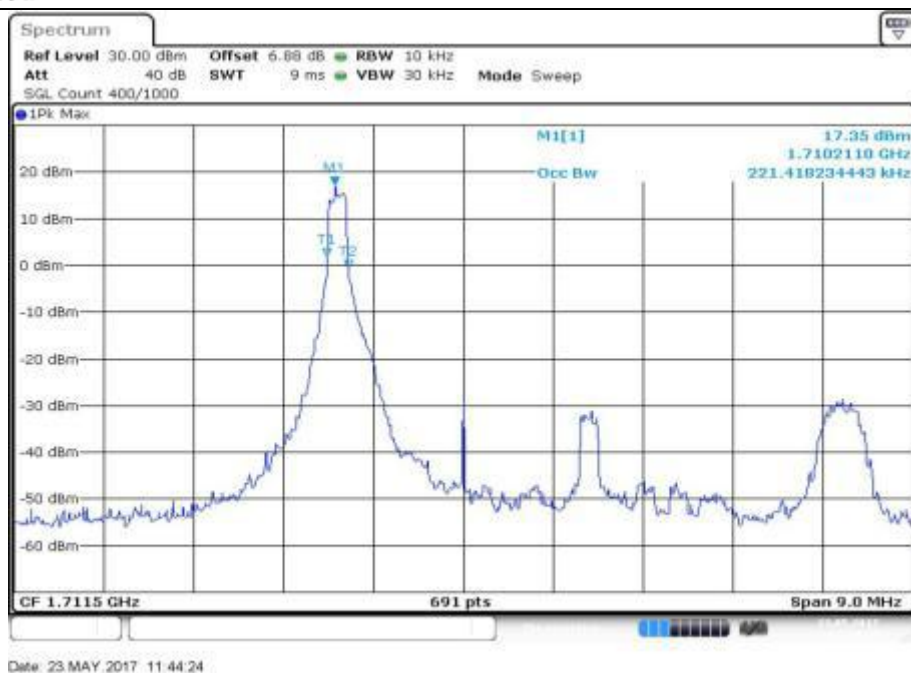


Fig.5

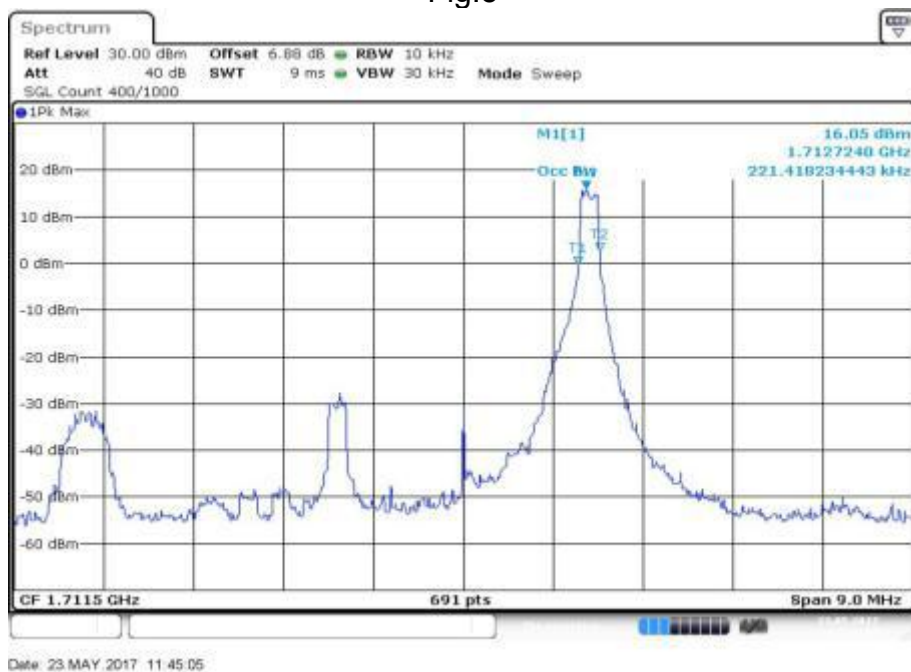


Fig.6

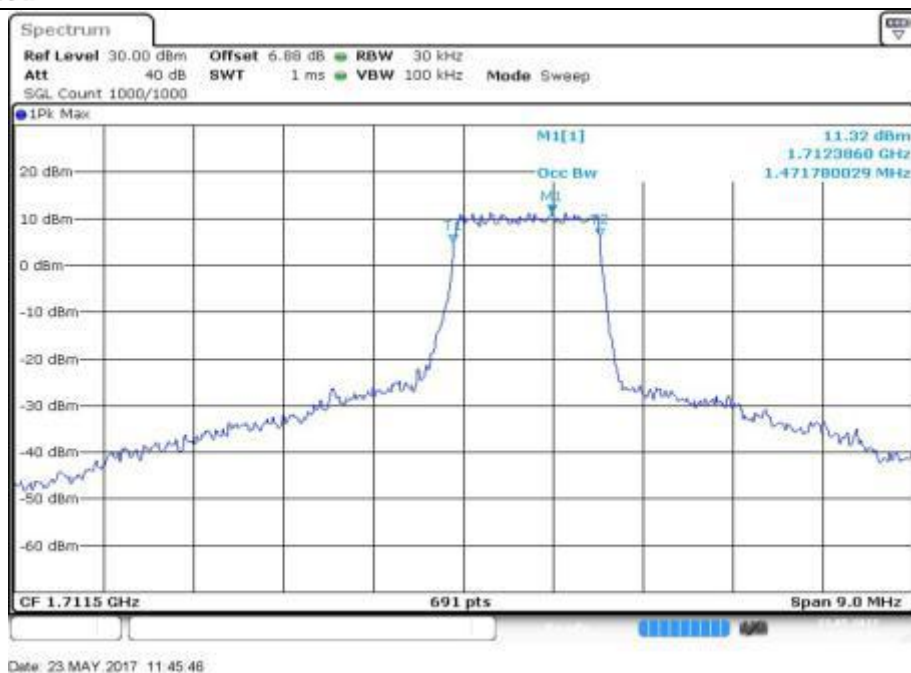


Fig.7

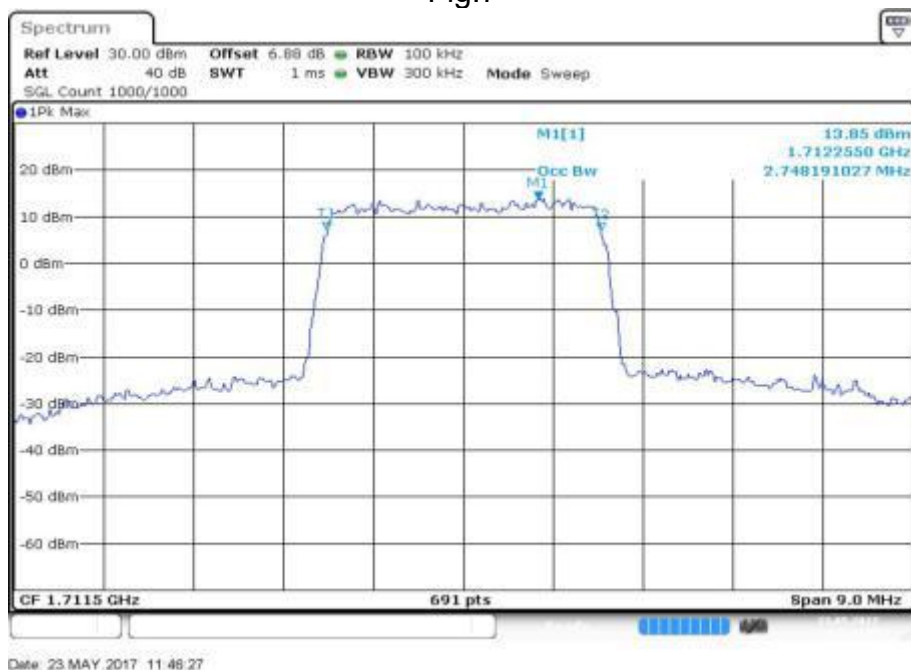


Fig.8

Band	Carrier frequency (MHz)	Channel (Mid)	BW	RB Size	RB Offset	Bandwidth of 99% Power (MHz)			
						QPSK		16-QAM	
4	1732.5	20175	3	1	0	0.221	Fig.1	0.234	Fig.5
				1	14	0.221	Fig.2	0.221	Fig.6
				8	4	1.459	Fig.3	1.459	Fig.7
				15	0	2.735	Fig.4	2.735	Fig.8

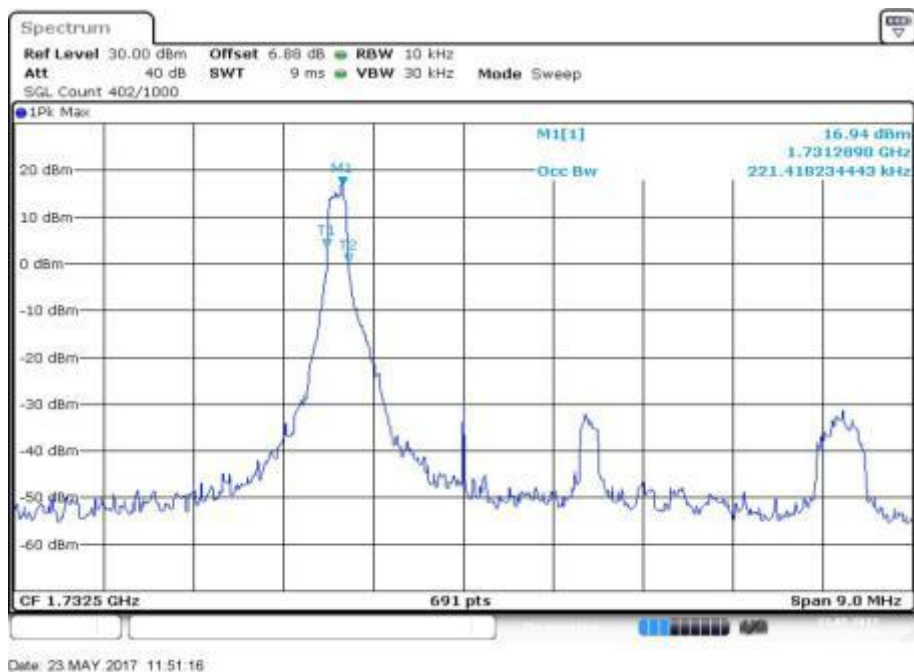


Fig.1

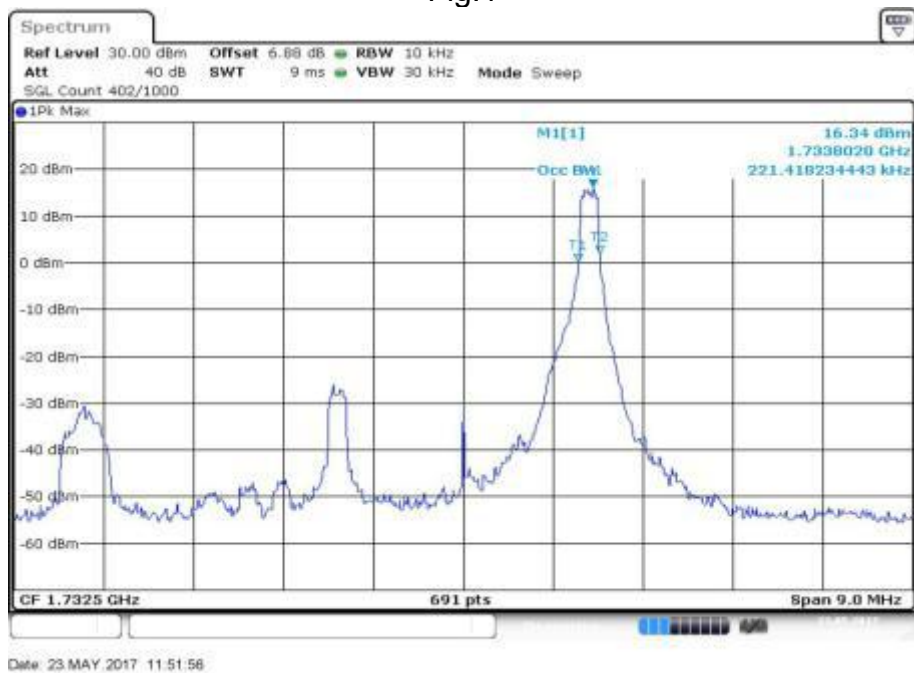


Fig.2

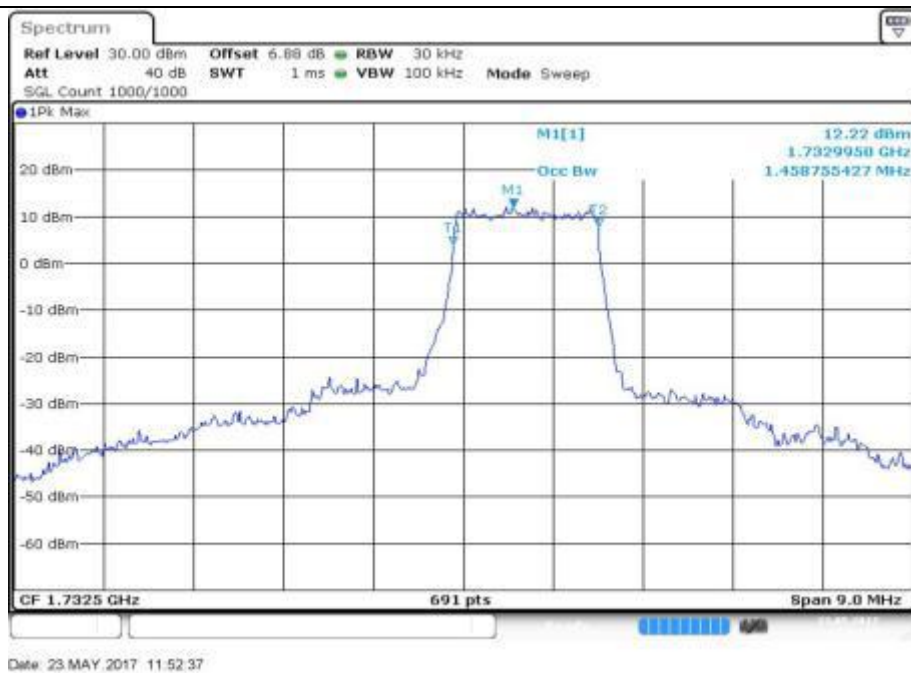


Fig.3

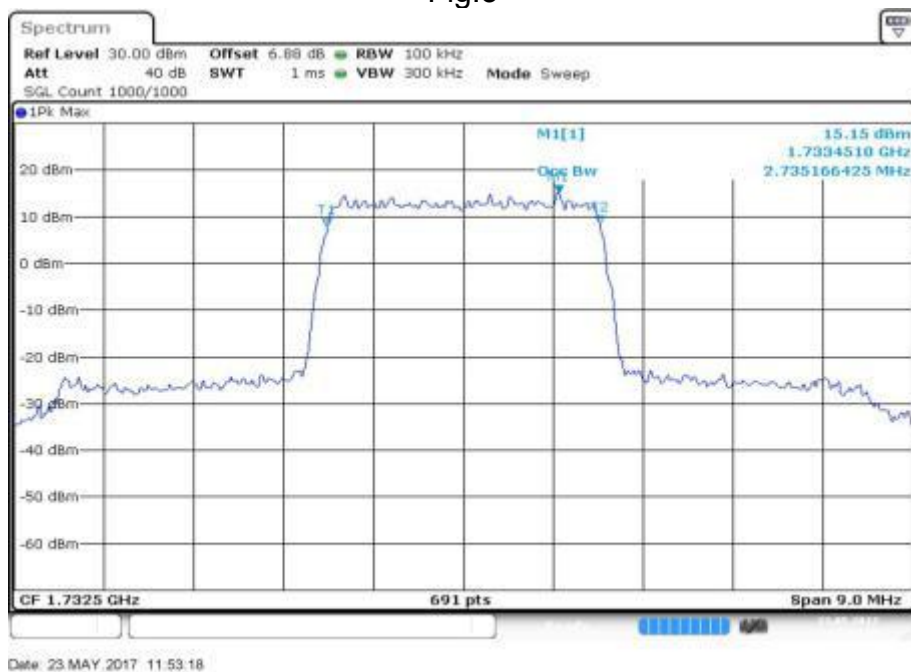


Fig.4