

D) 技术参数 Specifications:

型号Model no.:	RC-5
频率Frequency	2.4GHz
遥控距离Remote distance	20 M
工作电压Battery Voltage	AAx 3
显示屏 LCD Display	√
尺寸 Size (LxWxH)	180x55x20mm
重量 Weight	183 g

E) 使用注意事项 Attention

- 1.非专业人士，请勿随便拆卸，否则后果自负。
- 2.使用环境应保持干燥、通风注意防潮防水。
3. 请避免硬物将其划伤以至影响使用效果。
- 4.使用产品时，请详细阅读说明书。
- 1.Make sure the power is off after use.
- 2.Since there can be high voltage inside the unit, Do NOT open or repair the unit yourself. If there is any defect, please contact an experienced technician.
- 3.Keep the environment dry and ventilated when using the product. Do not leave or use the flash in humid or dusty environment.
- 4.Do NOT apply pressure to the product.
- 5.Read this manual carefully before using the product.

F) FCC Warning Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



RC-5说明书 Instruction Manual



感谢您选购锐鹰公司的产品！

如欲了解更多相关产品的信息，请联系您当地的经销商或访问我们的网页。使用产品之前，请先仔细阅读说明书。

Thank you for purchasing FalconEyes' products.

For further details of our related products, please contact your local distributor or visit our webpage at www.falconeyes.com.hk

Thank you.

Please read this manual carefully before using this product.

E-mail: info@falconeyes.com.hk

Website: www.falconeyes.com.hk




A) 产品概述 Product Overview

RC-5B遥控器配高清晰的LCD液晶屏，内置2.4G抗干扰遥控发送装置，抗干扰能力强；用户可根据所需，旋动旋钮进行频道设置，内设0-512个频道。可批量或单独遥控灯具，将灯具上的频道和遥控器频道设置一样，可同时遥控多台灯具；将灯具的频道设置不一样，可单个灯具进行调节控制；在遥控调节灯具时，遥控器直接更改对应的灯具频道，即可控制对应的灯具。使用方便，操作简单，摄影师不用移步到灯具边上，便可快速调节，大大提高工作效率。

RC-5B remote is equipped with a touch screen LCD display, and equipped with a internal 2.4G anti-jamming transmitter which able to control single or multiple fixtures at a same time. By setting the ID channels, user can set channels from 0-512. User can adjust the channels on the fixtures to match with the remote channels in order to remote control single or multiple units. Users can also preset different groups of fixtures in different channels and adjust the remote channels to control corresponding group of fixtures. User will no longer need to adjust lighting one by one and this improved the efficiency on different projects.

B) 功能示意图 Panel Diagram

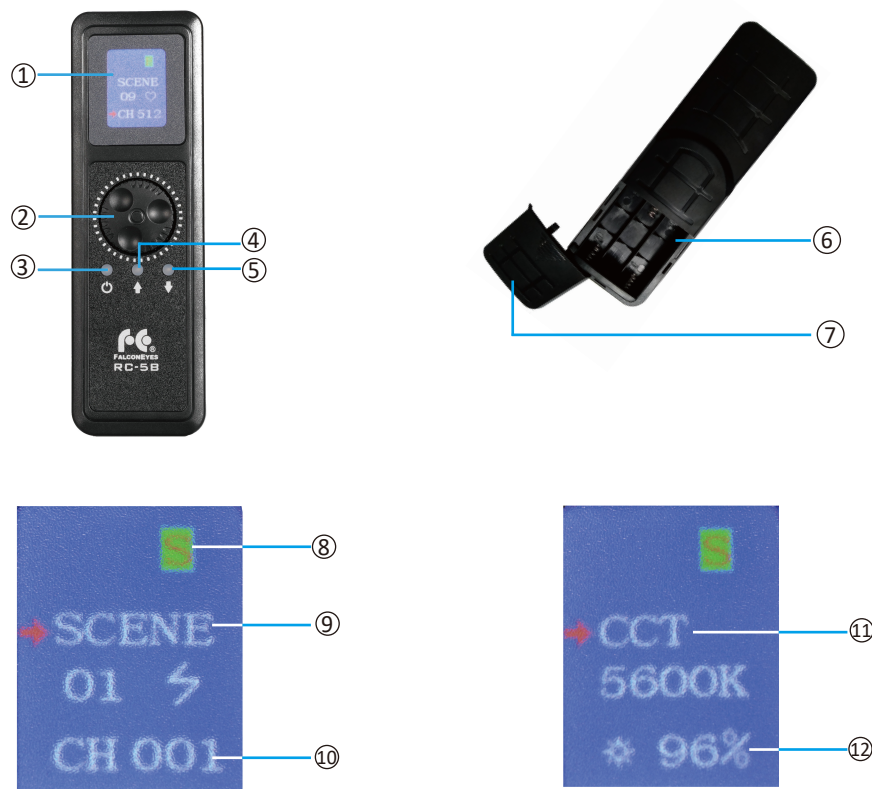

- | | | |
|------------------------|------------------------------------|-----------------------------------|
| 1. LCD显示屏LCD display | 5. 向下调节按键down button | 9. 特效模式Special effects mode |
| 2. 调节旋钮Adjustment knob | 6. AA电池槽AA battery | 10. 频道显示Channel display |
| 3. 遥控开关按键ON/OFF | 7. 电池盖子Battery cover | 11. 色温显示Color temperature display |
| 4. 向上调节按键 Up button | 8. F/S快调&慢调 Fast adjustment & slow | 12. 亮度显示 Output Display |

C) 操作说明 Operating Instructions

遥控器用AA电池，电池平滑面贴近弹簧进行安装，安装后按下遥控器面板上的开关，打开遥控器。用户可根据所需使用遥控器对灯具进行调节，应注意遥控器上的频道必须要调节到和灯具的频道一致，才能对灯具进行遥控操作。（遥控距离约20米）具体操作如下：

- 按向下调节键选中“CHANNEL(频道模式)”后，显示屏会显示如图1，旋动“调节旋钮”后便可调节到所需的频道（0-512）。
- 按向下调节键选中“CCT(色温模式)”后，显示屏会显示如图2，旋动“调节旋钮”即可调节到所需的色温（3000K-5600K）。
- 按向下调节键选中“DIMMER（亮度模式）”后，显示屏会显示如图3，旋动“调节旋钮”即可调节到所需的亮度（0%-100%）。
- 按向上调节键选中“SCENE（特效模式）”后，显示屏会显示如图4，需切换下一个特效场景时，旋动“调节旋钮”即可切换到所需的特效模式(0-9)。（特效模式一共设有九款，分别为：闪电1、闪电2、电视机、蜡烛、狗仔队、双闪、远近光灯、警示、呼吸灯）
- 该遥控器设有快调慢调功能，轻按“调节旋钮”即可切换快调或慢调（F&S）。

Please install three AA batteries and press the ON/OFF button to turn on the remote. Make sure the remote adjusts to the same channel as the light. (Distance limit: 20 m) The operation is as follows:

- Channel adjustment:**
Please the Down button and select the “CHANNEL” as Figure 1. Adjust the channel (0-512) by turning the Adjustment knob.
 - Color temperature adjustment:**
Please the Down button and select the “CCT” as Figure 2. Adjust the color temperature (3000-5600K) by turning the Adjustment knob.
 - Dimming adjustment:**
Please the Down button and select the “DIMMER” as Figure 3. Adjust the dimming (1-100%) by turning the Adjustment knob.
 - Special effects adjustment:**
Please the Down button and select the “SCENE” as Figure 4. Select the special effects (1-9) by turning the Adjustment knob.
- Nine special effects: Lightning1, Lightning2, TV Screen, Candle, Paparazzi, Strobe, High and low beam bulb, Double flash, Breathing.
5. User can press the adjustment knob to switch between Fast and Slow adjustment (F&S).

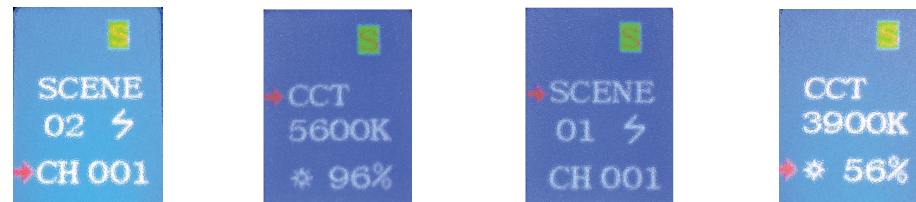


图1
Figure 1

图2
Figure 2

图3
Figure 3

图4
Figure 4