



HAC RF Test Report

For

Applicant Name: UNNECTO HOLDING LIMITED
Address: 13/F HARBOUR COMMERCIAL BUILDING 122-124
CONNAUGHT ROAD CENTRAL SHEUNG WAN HK
EUT Name: Mobile Phone
Model Name: Eco 1

Issued By


Company Name: BTF Testing Lab (Shenzhen) Co., Ltd.
Address: Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial
Park, Tantou Community, Songgang Street, Bao'an District,
Shenzhen, Guangdong, China

Report Number: BTF251210R00601
Test Standards: ANSI C63.19-2019 FCC 47 CFR §20.19 KDB 285076 D01
KDB 285076 D02 KDB 285076 D03
FCC ID: 2ADR3UE001

Test Conclusion: Pass
Test Date: 2026-01-05
Date of Issue: 2026-01-08
Tested By: Ella. Ku
Ella Ku / Tester

Date: 2026-01-08
Reviewed By: Birch Zhang
Birch Zhang / Project Engineer
Date: 2026-01-08

Approved By: Ryan.CJ
Ryan.CJ / EMC Manager
Date: 2026-01-08



Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue Date	Revisions Content
R_V0	2026-01-08	Original
Note:	Once the revision has been made, then previous versions reports are invalid.	

Table of Contents

1. Introduction	4
1.1 Identification of Testing Laboratory	4
1.2 Identification of the Responsible Testing Location	4
1.3 Laboratory Condition	4
1.4 Announcement	4
2. Product Information	5
2.1 Application Information	5
2.2 Manufacturer Information	5
2.3 Factory Information	5
2.4 General Description of Equipment under Test (EUT)	5
2.5 Equipment under Test Ancillary Equipment	5
2.6 Technical Information	5
2.7 Equipment under Test (EUT) Description	6
2.8 Air Interfaces / Bands Indicating Operating Modes	7
2.9 Power Reduction Description	7
3. Summary of Test Results	8
3.1 Test Standards	8
3.2 Summary of HAC result	8
3.3 HAC Test Uncertainty	9
4. Measurement System	10
4.1 Definition of Hearing Aid Compatibility (HAC)	10
4.2 HAC RF Test Configuration and Setting	11
4.3 MVG HAC System	11
5. System Validation	14
5.1 System Validation Setup	14
5.2 System Check Procedure	14
5.3 System Validation Procedure	15
6. WD emission requirements	16
7. Modulation Interference Factor (MIF)	17
8. HAC Immunity Measurement Procedures	18
8.1 HAC Measurement Process Diagram	18
8.2 HAC RF Test Setup	19
8.3 RF Emission Measurement Procedures: indirect measurement-preferred	19
9. Max. Conducted RF Output Power	20
10. Low-Power Exemption	26
10.1 Tune-up Power	26
10.2 RF Emissions Lower Power Exemption	27
11. Test Equipment List	28
ANNEX A HAC RF System Validation Result	29
ANNEX B HAC RF Measurement Result	31
ANNEX C Test Setup Photos	33
ANNEX D EUT External & Internal Photos	33
ANNEX E Calibration Information	33

1. Introduction

1.1 Identification of Testing Laboratory

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130

1.2 Identification of the Responsible Testing Location

Test Location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Description:	All measurement facilities used to collect the measurement data are located at Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
FCC Registration Number	518915
Designation Number	CN1409

1.3 Laboratory Condition

Ambient Temperature:	21°C to 25°C
Ambient Relative Humidity:	48% to 59%
Ambient Pressure:	100 kPa to 102 kPa

1.4 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2. Product Information

2.1 Application Information

Company Name:	UNNECTO HOLDING LIMITED
Address:	13/F HARBOUR COMMERCIAL BUILDING 122-124 CONNAUGHT ROAD CENTRAL SHEUNG WAN HK

2.2 Manufacturer Information

Company Name:	Shenzhen Water World Information Co., LTD
Address:	3rd Floor, Building 3, Dexinchang Smart Park, No. 23, Heping Road, Qinghua Community, Longhua Sub-district, Longhua District, Shenzhen City

2.3 Factory Information

Company Name:	Luzhou Chiteng Technology co., LTD
Address:	5th Floor, Building 16, Intelligent Terminal Industrial Park, Section 5, Jiugu Avenue, Tai'an Town, Jiangyang District, Luzhou City, Sichuan Province, P.R.China

2.4 General Description of Equipment under Test (EUT)

EUT Name	Mobile Phone
Under Test Model Name	Eco 1
Sample No.	BTFSN260120003

2.5 Equipment under Test Ancillary Equipment

Ancillary Equipment 1	Rechargeable Battery	
	Capacity	4000mAh
	Nominal Voltage	3.85V

2.6 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS/EGPRS 850/1900 3G Network WCDMA/HSDPA/HSUPA Band 2/4/5 4G Network FDD LTE Band 2/4/5/7/12/13/17/25/26/30/66/71 TDD LTE Band 38/41 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20/40) 5G WIFI 802.11a, 802.11n(HT20/40), 802.11ac(VHT20/40/80) BT (EDR+BLE)
-----------------------------------	---

2.7 Equipment under Test (EUT) Description

Operating Mode	GSM, WCDMA, LTE, WLAN, Bluetooth		
Frequency Range	GSM 850	TX: 824 ~ 849 MHz	RX: 869 ~ 894 MHz
	GSM 1900	TX: 1850 ~ 1910 MHz	RX: 1930 ~ 1990 MHz
	WCDMA Band 2	TX: 1850 ~ 1910 MHz	RX: 1930 ~ 1990 MHz
	WCDMA Band 4	TX: 1710 ~ 1755 MHz	RX: 2110 ~ 2155 MHz
	WCDMA Band 5	TX: 824 ~ 849 MHz	RX: 869 ~ 894 MHz
	LTE Band 2	TX: 1850 ~ 1910 MHz	RX: 1930 ~ 1990 MHz
	LTE Band 4	TX: 1710 ~ 1755 MHz	RX: 2110 ~ 2155 MHz
	LTE Band 5	TX: 824 ~ 849 MHz	RX: 869 ~ 894 MHz
	LTE Band 7	TX: 2500 ~ 2570 MHz	RX: 2620 ~ 2690 MHz
	LTE Band 12	TX: 698 ~ 716 MHz	RX: 728 ~ 746 MHz
	LTE Band 13	TX: 777 ~ 787 MHz	RX: 746 ~ 756 MHz
	LTE Band 17	TX: 704 ~ 716 MHz	RX: 734 ~ 746 MHz
	LTE Band 25	TX: 1850 ~ 1915 MHz	RX: 1930 ~ 1995 MHz
	LTE Band 26 part 90	TX: 814.7 ~ 823.3 MHz	RX: 859.7 ~ 868.3 MHz
	LTE Band 26 part 22	TX: 824.7 ~ 848.3 MHz	RX: 869.7 ~ 893.3 MHz
	LTE Band 30	2305 ~ 2315 MHz	
	LTE Band 38	2570 ~ 2620 MHz	
	LTE Band 41	2535 ~ 2655 MHz	
	LTE Band 66	TX: 1710 ~ 1780 MHz	RX: 2110 ~ 2200 MHz
	LTE Band 71	TX: 663 ~ 698 MHz	RX: 617 ~ 652 MHz
	802.11b/g/n(HT20)	2412 ~ 2462 MHz	
	802.11n(HT40)	2422 ~ 2452 MHz	
	802.11a /802.11n(HT20/40) /802.11ac(HT20/40/80)	U-NII-1: 5180 MHz ~ 5240 MHz, U-NII-2A: 5260 MHz ~ 5320 MHz, U-NII-2C: 5500 MHz ~ 5700 MHz, U-NII-3: 5745 MHz ~ 5825 MHz	
	Bluetooth	2402 ~ 2480 MHz	
Modulation Mode	GSM/GPRS: GMSK EDGE: 8PSK WCDMA: QPSK, 16QAM LTE: QPSK, 16QAM, 64QAM 802.11b: DSSS 802.11a/g: OFDM 802.11n-HT20/HT40: OFDM 802.11ac-VHT20/40/80: OFDM BR+EDR: GFSK, π/4-DQPSK, 8-DPSK Bluetooth LE: GFSK		

2.8 Air Interfaces / Bands Indicating Operating Modes

Air Interface	Band	Type	C63.19 RFAIL Tested	Simultaneous Transmitter	Name of Service	Power Reduction
GSM	850	VO	Yes	WLAN & BT	CMRS Voice	No
	1900	VO	Yes	WLAN & BT	CMRS Voice	No
	GPRS/EGPRS	DT	No	N/A	N/A	No
WCDMA	Band II	VO	No	WLAN & BT	CMRS Voice	No
	Band IV	VO	No	WLAN & BT	CMRS Voice	No
	Band V	VO	No	WLAN & BT	CMRS Voice	No
	HSPA	DT	No	N/A	N/A	No
LTE	Band 2	VD	No	WLAN & BT	VoLTE	No
	Band 4	VD	No	WLAN & BT	VoLTE	No
	Band 5	VD	No	WLAN & BT	VoLTE	No
	Band 7	VD	No	WLAN & BT	VoLTE	No
	Band 12	VD	No	WLAN & BT	VoLTE	No
	Band 13	VD	No	WLAN & BT	VoLTE	No
	Band 17	VD	No	WLAN & BT	VoLTE	No
	Band 25	VD	No	WLAN & BT	VoLTE	No
	Band 26 part 90	VD	No	WLAN & BT	VoLTE	No
	Band 26 part 22	VD	No	WLAN & BT	VoLTE	No
	Band 30	VD	No	WLAN & BT	VoLTE	No
	Band 38	VD	No	WLAN & BT	VoLTE	No
	Band 41	VD	No	WLAN & BT	VoLTE	No
	Band 66	VD	No	WLAN & BT	VoLTE	No
	Band 71	VD	No	WLAN & BT	VoLTE	No
WLAN	2.4g&5g	DT	No	WWAN	N/A	No
BT	2450	DT	No	WWAN	N/A	No

NA: Not Applicable

VO: Voice Only

VD: CMRS and IP Voice Service over Digital Transport

DT: Digital Transport Only

Note1: The air interface max power plus MIF is complies with ANSI63.19-2019 Table 4.1 RFAIPL

Note2: According to section 4.7 of the 2019 version of ANSI C63.19, the exemption limits vary for different frequency ranges. For details, refer to Part Six of the report.

Note3: The hearing aid compatibility mode of the prototype was turned on during testing, and all tests were performed in HAC mode.

2.9 Power Reduction Description

Each qualified transmitter is tested individually using the method of ANSI C63.19-2019 Clause 4. Other WD transmitters shall be temporarily disabled or reduced in power level such that their average antenna input power is at least 6 dB lower than the average antenna input power of the transmitter under test. The transmitter under test is set to the fixed and repeatable combination of power and modulation characteristic that is representative of the worst case (highest interference potential) likely to be encountered while the WD is experiencing normal voice mode operation.

The limiting measurement for device qualification is the highest RF audio interference potential measured for any of the WD transmitters. If the highest interference measurement is from a transmitter that is not required for normal voice mode operation, a secondary rating may be given that applies when that transmitter is disabled.

Note: The device does not support power reduction for HAC mode, so we do not need to consider the case of power reduction.

3. Summary of Test Results

3.1 Test Standards

No.	Identity	Document Title
1	ANSI C63.19-2019	American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids
2	FCC 47 CFR §20.19	Hearing Aid Compatible Mobile Headsets
3	KDB 285076 D01	HAC Guidance v06r04
4	KDB 285076 D02	T-Coil testing for CMRS IP v04
5	KDB 285076 D03	HAC FAQ v01r06

3.2 Summary of HAC result

Band	Channel	Measurement Result	
GSM850	Low (128)	E-Field dB (V/m)	27.58
	Middle(190)	E-Field dB (V/m)	27.66
	High(251)	E-Field dB (V/m)	28.66
GSM1900	Low (512)	E-Field dB (V/m)	28.11
	Middle(661)	E-Field dB (V/m)	28.45
	High(810)	E-Field dB (V/m)	28.44
PASS			

3.3 HAC Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in ANSI C6 3.19-2019. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

UNCERTAINTY EVALUATION FOR RF HAC MEASUREMENT					
Uncertainty Component	Tol ($\pm$ dB)	Prob. Dist.	Div.	Uncertainty (dB)	Uncertainty (%)
Measurement System					
RF reflections	0.1	R	$\sqrt{3}$	0.06	
Field probe conv. Factor	0.4	R	$\sqrt{3}$	0.23	
Field probe anisotropy	0.25	R	$\sqrt{3}$	0.14	
Positioning accuracy	0.2	R	$\sqrt{3}$	0.12	
Probe cable placement	0.1	R	$\sqrt{3}$	0.06	
System repeatability	0.2	R	$\sqrt{3}$	0.12	
EUT repeatability	0.4	N	1	0.40	
Combined Standard Uncertainty		N	1	0.52	
Expanded Uncertainty (95% CONFIDENCE INTERVAL)		N	$K=2$	1.03	12.65
REPORTED Expanded uncertainty (confidence level of 95%, $k = 2$)		N	$K=2$	1.00	13.00

4. Measurement System

4.1 Definition of Hearing Aid Compatibility (HAC)

The purpose of this standard is to establish categories for hearing aids and for WD (wireless communications devices) that can indicate to health care practitioners and hearing aid users which hearing aids are compatible with which WD, and to provide tests that can be used to assess the electromagnetic characteristics of hearing aids and WD and assign them to these categories. The various parameters required, in order to demonstrate compatibility and accessibility are measured. The design of the standard is such that when a hearing aid and WD achieve one of the categories specified, as measured by the methodology of this standard, the indicated performance is realized.

In order to provide for the usability of a hearing aid with a WD, several factors must be coordinated:

- a) Radio frequency (RF) measurements of the near-field electric and magnetic fields emitted by a WD to categorize these emissions for correlation with the RF immunity of a hearing aid.
- b) Magnetic field measurements of a WD emitted via the audio transducer associated with the T-coil mode of the hearing aid, for assessment of hearing aid performance.
- c) Measurements with the hearing aid and a simulation of the categorized WD T-coil emissions to assess the hearing aid RF immunity in the T-coil mode.

The WD radio frequency (RF) and audio band emissions are measured.

Hence, the following are measurements made for the WD:

- a) RF E-Field emissions
- b) T-coil mode, magnetic signal strength in the audio band
- c) T-coil mode, magnetic signal and noise articulation index
- d) T-coil mode, magnetic signal frequency response through the audio band

Corresponding to the WD measurements, the hearing aid is measured for:


- a) RF immunity in microphone mode
- b) RF immunity in T-coil mode

4.2 HAC RF Test Configuration and Setting

For HAC RF emission testing, the EUT was linked and controlled by wireless communication test set. Communication between the EUT and the wireless communication test set was established by air link. The distance between the EUT and the communicating antenna of the test set is larger than 50 cm and the output power radiated from the wireless communication test set antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the wireless communication test set to radiate maximum output power during HAC testing.

4.3 MVG HAC System

MVG HAC System Diagram

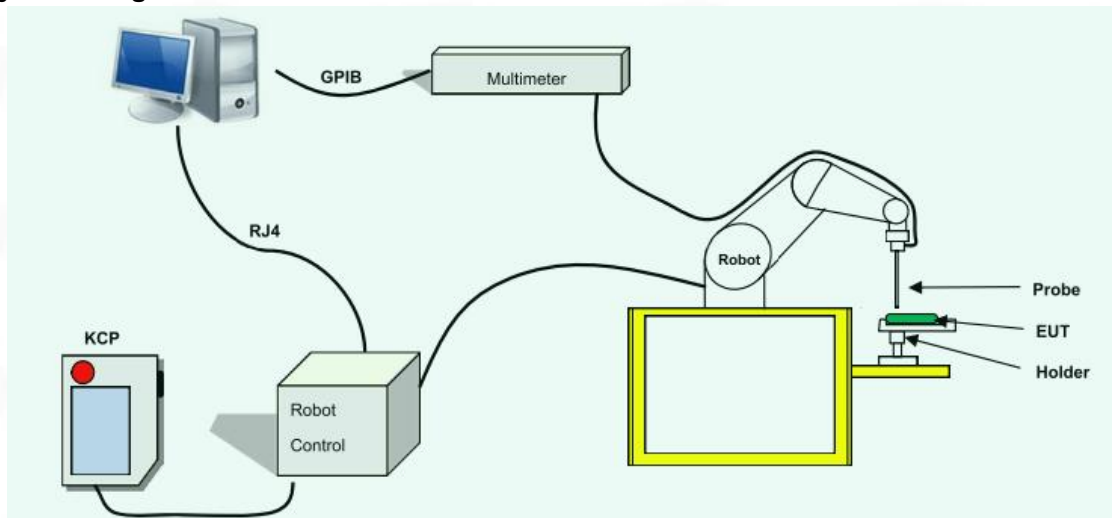

4.3.1 Robot



A standard high precision 6-axis robot (Denso) with a scanning system

- It must be able to scan all the volume of the phantom to evaluate the tridimensional distribution of SAR.
- Must be able to set the probe orthogonal to the surface of the phantom ($\pm 30^\circ$).
- Detects stresses on the probe and stop itself if necessary to keep the integrity of the probe.

4.3.2 E-Field Probe

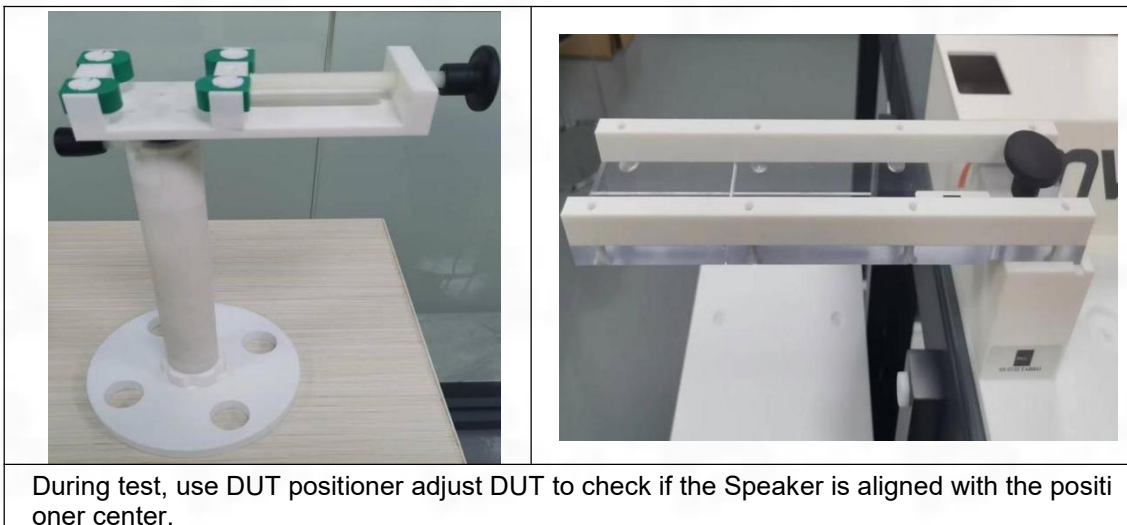


Figure 1 – MVG COMOHAC E field Probe

Probe Length	330 mm
Length of Individual Dipoles	3.3 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	5 mm
Distance between dipoles / probe extremity	3 mm

Device Type	COMOHAC E FIELD PROBE
Manufacturer	MVG
Model	SCE
Serial Number	SN 07/22 EPH50
Product Condition (new / used)	New
Frequency Range of Probe	0.7GHz-2.5GHz
Resistance of Three Dipoles at Connector	Dipole 1: R1=0.208 MΩ Dipole 2: R2=0.220 MΩ Dipole 3: R3=0.212 MΩ

4.3.3 Device Holder/DUT positioner




5. System Validation

According to ANSI C63.19, before hearing aid testing commences, the experimental setup shall be validated. Sub clauses 6.3.1 through 6.3.5 include a set of pretest procedures designed to validate the experimental setup to ensure the accuracy of the results. To verify that the hearing aid performs per the manufacturer's specifications, 6.3.5 advises that the hearing aid be pretested per ANSI S3.22.

5.1 System Validation Setup


Using this setup configuration, the signal generator was adjusted for the desired output power 20dBm (100mW) at a specified frequency. The reference power from the coupled port of the directional coupler is recorded. Next, the output cable is connected to the reference dipole

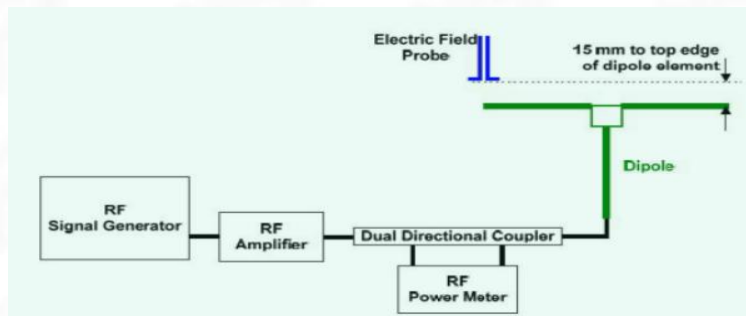

5.2 System Check Procedure

The input signal was an unmodulated continuous wave. The following points were taken into consideration in performing this check:


- Average Input Power $P = 100\text{mW RMS}$ (20dBm RMS) after adjustment for return loss
- The test fixture must meet the 2 wavelength separation criterion
- The proper measurement of the 1 cm probe to dipole separation, which is measured from top surface of the dipole to the calibration reference point of the sensor, defined by the probe manufacturer is shown in the following diagram:

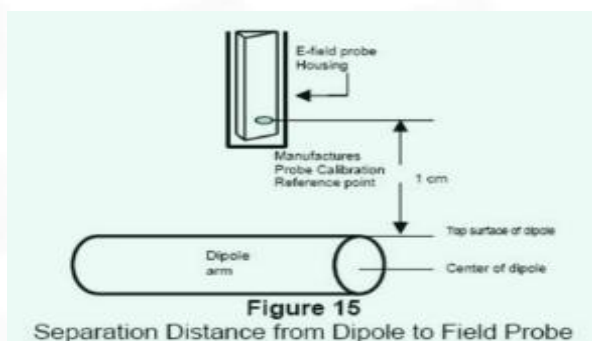

RF power was recorded using both an average reading meter and a peak reading meter. Readings of the probe are provided by the measurement system. To assure proper operation of the near-field measurement probe the input power to the dipole shall be commensurate with the full rated output power of the wireless device (e.g. – for a cellular phone wireless device the average peak antenna input power will be on the order of 100mW (i.e. - 20dBm) RMS after adjustment for any mismatch.

5.3 System Validation Procedure

A dipole antenna meeting the requirements given in C63.19 was placed in the position normally occupied by the WD. The length of the dipole was scanned with both E-field and H-field probes and the maximum values for each were recorded. Using the near-field measurement system, scan the antenna over the radiating dipole and record the greatest field reading observed. Due to the nature of E-fields about free-space dipoles, the two E-field peaks measured over the dipole are averaged to compensate for non-parallelity of the setup see manufacturer method on dipole calibration certificates, Field strength measurements shall be made only when the probe is stationary. RF power was recorded using both an average and a peak power reading meter.

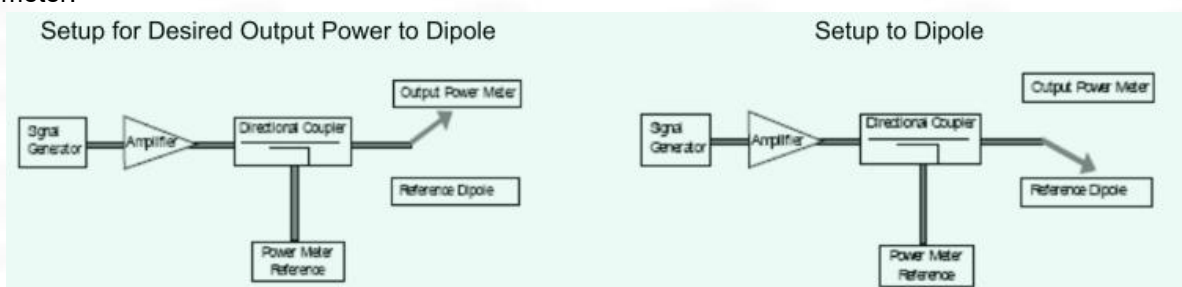

6. WD emission requirements

The WD's conducted power must be at or below either the stated RFAIPL (Table 1.1) or the stated peak power level (Table 1.2), or the average near-field emissions over the measurement area must be at or below the stated RFAIL (Table 1.3), or the stated peak field strength (Table 1.4). The WD may demonstrate compliance by meeting any of these four requirements, but it must do so in each of its operating bands at its established worst-case normal speech- mode operating condition.

Table 1.1—Wireless device RF audio interference power level

Frequency range (MHz)	RFAIPL (dBm)
<960	29
960-2000	26
>2000	25

Table 1.2—Wireless device RF peak power level

Frequency range (MHz)	RFpeak Power (dBm)
<960	35
960-2000	32
>2000	31

Table 1.3—Wireless device RF audio interference level

Frequency range (MHz)	RFAIL [dB(V/m)]
<960	39
960-2000	36
>2000	35

Table 1.4-Wireless device RF peak near-field level

Frequency range (MHz)	RFpeak [dB(V/m)]
<960	45
960-2000	42
>2000	41

7. Modulation Interference Factor (MIF)

The HAC Standard ANSI C63.19-2019 defines a new scaling using the Modulation Interference Factor (MIF). For any specific fixed and repeatable modulated signal, a modulation interference factor (MIF, expressed in dB) may be developed that relates its interference potential to its steady-state rms signal level or average power level. This factor is a function only of the audio-frequency amplitude modulation characteristics of the signal and is the same for field-strength and conducted power measurements. It is important to emphasize that the MIF is valid only for a specific repeatable audio-frequency amplitude modulation characteristic. Any change in modulation characteristic requires determination and application of a new MIF.

The MIF may be determined using a radiated RF field, a conducted RF signal, or in a preliminary stage, a mathematical analysis of a modeled RF signal:

a) Verify the slope accuracy and dynamic range capability over the desired operating frequency band of a fast probe or sensor, square-law detector, as specified in D.3, and weighting system as specified in D.4 and D.5. For the probe and instrumentation included in the measurement of MIF, additional calibration and application of calibration factors are not required.

b) Using RF illumination or conducted coupling, apply the specific modulated signal in question to the measurement system at a level within its confirmed operating dynamic range.

c) Measure the steady-state rms level at the output of the fast probe or sensor.

d) Measure the steady-state average level at the weighting output.

e) Without changing the square-law detector or weighting system, and using RF illumination or conducted coupling, substitute for the specific modulated signal a 1 kHz, 80% amplitude-modulated carrier at the same frequency and adjust its strength until the level at the weighting output equals the step d) measurement.

f) Without changing the carrier level from step e), remove the 1 kHz modulation and again measure the steady-state rms level indicated at the output of the fast probe or sensor.


g) The MIF for the specific modulation characteristic is provided by the ratio of the step f) measurement to the step c) measurement, expressed in dB ($20 \times \log(\text{step f}) / \text{step c})$).

In practice, step e) and step f) need not be repeated for each MIF determination if the relationship between the two measurements has been preestablished for the measurement system over the operating frequency and dynamic ranges.


Modulation group	Modulation characteristics	MIF
GSM	TDMA	3.3
WCDMA	UMTS-FDD	-27.2
LTE	LTE-FDD / RB=1 / BW=20 MHz / QPSK	-15.6
	LTE-TDD / RB=1 / BW=20 MHz / QPSK	-1.6
2.4G WiFi	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	-2.02
	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	0.12
5G WiFi	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle)	-5.59
	IEEE 802.11a/n WiFi 5 GHz (OFDM, 54 Mbps)	-3.15
	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	-5.57
Bluetooth	IEEE 802.15.1 Bluetooth (GFSK, DH1)	1.0

8. HAC Immunity Measurement Procedures

8.1 HAC Measurement Process Diagram

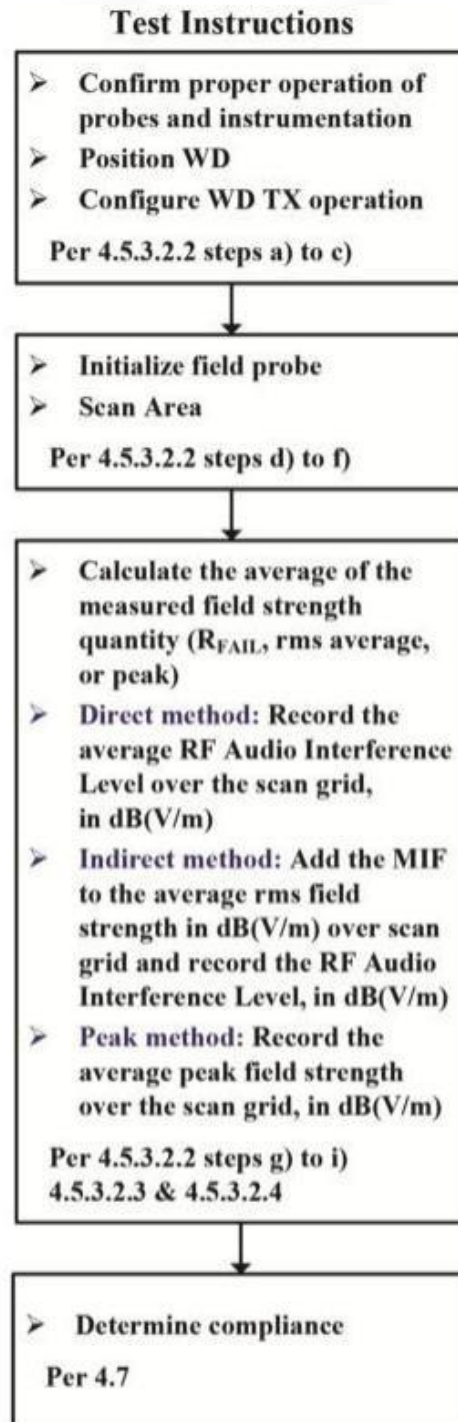

8.2 HAC RF Test Setup

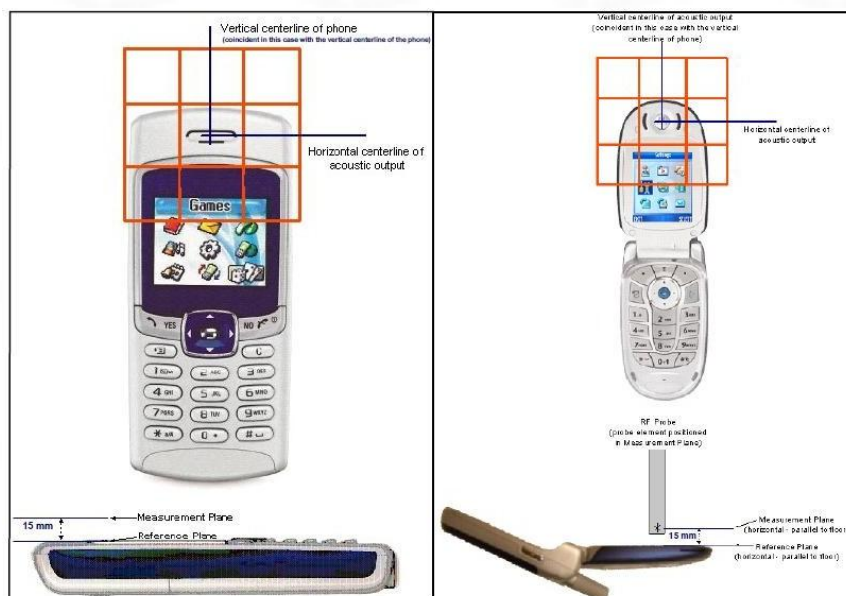

WD reference and plane for RF emission measurements

8.3 RF Emission Measurement Procedures: indirect measurement-preferred

- The measurement procedure using a probe and instrumentation chain with a response of <10 kHz (see ANSI63.19-2019 section4.5.1) is identical to the direct measurement method of ANSI63.19-2019 section4.5.3.2.2: however, because of the bandwidth limitations, it cannot include the direct use of the spectral and temporal weighting functions. The output of such measurement systems must be readings of steady state rms field strength in dB(V/m).
- The RF audio interference level in dB(Vim) is obtained by adding the Modulation Interference Factor (in decibels) to the average steady state rms field strength reading over the measurement area, in dB(V/m), from Step c). Use this result to determine the WD's compliance per ANSI 63.19-2019 section4.7.
- The measurement area shall be centered on the acoustic output or the T-Coil mode measurement reference point, as appropriate. Locate the field probe at the initial test position in the 50 mm by 50 mm measurement area, which is contained in the measurement plane.described in ANSI 63.19-2019 section 4.5.2 and illustrated in Figure A.1. If the field alignment method is used, align the probe for maximum field reception.
- Record the reading at the output of the measurement system.
- Scan the entire 50 mm by 50 mm measurement area in equally spaced step sizes and record the reading at each measurement point. The step size shall meet the specification for step size in ANSI 63.19-2019 section 4.5.3.
- Calculate the average of the measurements taken in Step f).
- Convert the average value found in Step g) to RF audio interference level, in volts per meter, by taking the square root of the reading and then dividing it by the measurement system transfer function, as established in ANSI 63.19-2019 section 4.5.3.2.1 pre-test procedure. Convert the result to dB(V/m) by taking the base-10 logarithm and multiplying it by 20.Expressed as a formula:

$$\text{RF audio interference level in db(V/M)} = 20 \times \log(R_{\text{ave}}^{1/2} / \text{TF})$$

where

R_{ave} is the average reading

- Compare this RF audio interference level to the limits in 6 and record the result.

9. Max. Conducted RF Output Power

2G

Mode: GSM850	Maximum Tune-up(dBm)	Burst Average Power (dBm)		
		CH128	CH190	CH251
		824.2MHz	836.6MHz	848.8MHz
GSM	32.00	31.71	31.70	31.65
Mode: GSM1900	Maximum Tune-up(dBm)	Burst Average Power (dBm)		
		CH512	CH661	CH810
		1850.2MHz	1880.0MHz	1909.8MHz
GSM	29.00	28.09	28.43	28.72

3G

Mode	Maximum Tune-up(dBm)	WCDMA Band II		
		Conducted Power (dBm)		
		CH9262	CH9400	CH9538
		1852.4	1880.0	1907.6
RMC 12.2K	21.50	20.59	20.95	21.49

Mode	Maximum Tune-up(dBm)	WCDMA Band IV		
		Conducted Power (dBm)		
		CH1312	CH1413	CH1513
		1712.4	1732.6	1752.6
RMC 12.2K	18.50	17.82	18.18	18.29

Mode	Maximum Tune-up(dBm)	WCDMA Band V		
		Conducted Power (dBm)		
		CH4132	CH4183	CH4233
		826.4	836.6	846.6
RMC 12.2K	21.00	20.66	20.53	20.62

4G

Band 2

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	18700	18900	19100
					1860.0MHz	1880.0MHz	1900.0MHz
20MHz	QPSK	1	0	22.50	21.27	21.57	22.09
			50	22.50	21.66	22.06	22.48
			99	22.50	21.48	21.99	22.23
		50	0	21.50	20.44	20.79	21.28
			25	21.50	20.55	20.99	21.39
			50	21.50	20.66	21.02	21.33
		100	0	21.50	20.58	20.92	21.31

Band 4

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20050	20175	20300
					1720.0MHz	1732.5MHz	1745.0MHz
20MHz	QPSK	1	0	22.50	22.11	22.42	22.46
			50	23.00	22.62	22.88	22.80
			99	23.00	22.49	22.55	22.48
		50	0	22.00	21.18	21.76	21.53
			25	22.00	21.49	21.71	21.59
			50	22.00	21.45	21.59	21.78
		100	0	22.00	21.33	21.69	21.67

Band 5

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20450	20525	20600
					829.0MHz	836.5MHz	844.0MHz
10MHz	QPSK	1	0	22.00	21.74	21.67	21.65
			25	22.00	21.97	21.85	21.86
			49	22.00	21.72	21.68	21.74
		25	0	21.00	20.85	20.75	20.70
			13	21.00	20.80	20.73	20.78
			25	21.00	20.76	20.69	20.72
		50	0	21.00	20.81	20.71	20.71

Band 7

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	20850	21100	21350
					2510.0MHz	2535.0MHz	2560.0MHz
20MHz	QPSK	1	0	22.50	21.04	21.26	22.02
			50	23.00	21.29	21.72	22.63
			99	23.00	21.09	21.81	22.62
		50	0	21.50	20.20	20.34	21.25
			25	21.50	20.13	20.59	21.44
			50	21.50	20.08	20.67	21.48
		100	0	21.50	20.17	20.54	21.38

Band 12

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	23060	23095	23130
					704.0MHz	707.5MHz	711.0MHz
10MHz	QPSK	1	0	22.00	21.87	21.83	21.86
			25	22.50	22.12	22.08	22.16
			49	22.50	22.01	22.05	22.10
		25	0	21.50	20.95	21.00	21.02
			13	21.50	21.03	21.04	21.16
			25	21.50	21.07	21.09	21.08
		50	0	21.50	21.03	21.07	21.07

Band 13

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	23230
					782.0MHz
10MHz	QPSK	1	0	23.50	23.08
			25	23.50	23.26
			49	23.00	22.99
		25	0	22.50	22.09
			13	22.50	22.13
			25	22.50	22.06
		50	0	22.50	22.11

Band 17

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	23780	23790	23800
					709MHz	710MHz	711MHz
10MHz	QPSK	1	0	22.00	21.94	21.88	21.90
			25	22.50	22.27	22.20	22.23
			49	22.50	22.17	22.13	22.19
		25	0	21.50	21.06	21.03	21.06
			13	21.50	21.11	21.13	21.22
			25	21.50	21.12	21.14	21.12
		50	0	21.50	21.09	21.10	21.10

Band 25

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	26140	26365	26590
					1860.0MHz	1882.5MHz	1905.0MHz
20MHz	QPSK	1	0	23.00	21.72	22.08	22.59
			50	23.00	22.15	22.61	22.99
			99	23.00	21.94	22.50	22.75
		50	0	22.00	20.88	21.39	21.80
			25	22.00	21.06	21.54	21.82
			50	22.00	21.08	21.58	21.77
		100	0	22.00	21.06	21.47	21.82

Band 26 Part 90

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	26740
					819.0MHz
10MHz	QPSK	1	0	22.50	22.10
			25	22.50	22.21
			49	22.00	21.86
		25	0	21.50	21.08
			13	21.50	21.02
			25	21.50	21.01
		50	0	21.50	21.01

Band 26 Part 22

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	26865	26915	26965
					831.5MHz	836.5MHz	841.5MHz
15MHz	QPSK	1	0	22.00	21.79	21.65	21.61
			38	22.00	21.85	21.74	21.77
			74	22.00	21.63	21.61	21.68
		36	0	21.00	20.88	20.82	20.78
			18	21.00	20.86	20.79	20.81
			39	21.00	20.78	20.81	20.77
		75	0	21.00	20.80	20.78	20.80

Band 30

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	27710
					2310.0MHz
10MHz	QPSK	1	0	19.00	18.87
			25	19.50	19.03
			49	19.00	18.78
		25	0	19.00	18.92
			13	19.00	18.82
			25	19.00	18.75
		50	0	19.00	18.84

Band 38

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	37850	38000	38150
					2580.0MHz	2595.0MHz	2610.0MHz
20MHz	QPSK	1	0	19.50	19.08	19.14	18.93
			50	19.50	19.35	19.41	19.11
			99	19.50	19.11	18.92	18.84
		50	0	19.50	19.20	19.34	19.03
			25	19.50	19.33	19.16	19.05
			50	19.50	19.28	19.06	18.93
		100	0	19.50	19.32	19.28	18.88

Band 41

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	39750	40620	41490
					2498.5MHz	2593.0MHz	2687.5MHz
20MHz	QPSK	1	0	19.50	17.97	19.24	18.36
			50	20.00	18.01	19.57	18.28
			99	19.50	17.66	19.12	18.04
		50	0	19.50	18.00	19.34	18.44
			25	19.50	17.86	19.30	18.22
			50	19.50	17.80	19.20	18.15
		100	0	19.50	17.99	19.14	18.37

Band 66

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	132072	132322	132572
					1720.0MHz	1745.0MHz	1770.0MHz
20MHz	QPSK	1	0	20.00	19.15	19.39	19.61
			50	20.00	19.73	19.68	19.95
			99	20.00	19.54	19.36	19.66
		50	0	20.00	19.20	19.58	19.85
			25	20.00	19.57	19.68	19.80
			50	20.00	19.56	19.84	19.92
		100	0	20.00	19.40	19.74	19.86

Band 71

Bandwidth	Modulation	RB allocation	RB offset	Maximum Tune-up(dBm)	133222	133322	133372
					MHz	683.0MHz	688.0MHz
20MHz	QPSK	1	0	22.00	21.57	21.51	21.52
			50	22.00	21.89	21.78	21.80
			99	22.00	21.57	21.58	21.68
		50	0	21.00	20.50	20.65	20.53
			25	21.00	20.69	20.70	20.67
			50	21.00	20.66	20.67	20.66
		100	0	21.00	20.60	20.65	20.61

2.4G

Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
2.4g Wifi (2.4~2.4835)	802.11b	1	2412	15.40	15.50	No
		6	2437	15.49	15.50	Yes
		11	2462	15.18	15.50	No
	802.11g	1	2412	15.38	15.50	No
		6	2437	15.53	16.00	No
		11	2462	14.72	15.00	No
	802.11n(HT20)	1	2412	14.99	15.00	No
		6	2437	15.10	15.50	No
		11	2462	14.65	15.00	No
	802.11n(HT40)	3	2422	15.59	16.00	No
		6	2437	15.66	16.00	No
		9	2452	15.43	15.50	No

5G

Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-1 (5.150~5.250)	802.11a	36	5180	15.33	15.50	No
		40	5200	15.25	15.50	No
		48	5240	15.11	15.50	No
	802.11n(HT20)	36	5180	15.71	16.00	No
		40	5200	15.57	16.00	No
		48	5240	15.62	16.00	No
	802.11ac(VHT20)	36	5180	15.58	16.00	No
		40	5200	15.45	15.50	No
		48	5240	15.51	16.00	No
	802.11n(HT40)	38	5190	15.62	16.00	No
		46	5230	15.62	16.00	No
	802.11ac(VHT40)	38	5190	15.60	16.00	No
		46	5230	15.65	16.00	No
	802.11ac(VHT80)	42	5210	16.03	16.50	Yes

Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-2a (5.250~5.350)	802.11a	52	5260	15.12	15.50	No
		56	5300	14.93	15.00	No
		64	5320	14.30	14.50	No
	802.11n(HT20)	52	5260	15.45	15.50	No
		56	5300	15.25	15.50	No
		64	5320	15.26	15.50	No
	802.11ac(VHT20)	52	5260	15.42	15.50	No
		56	5300	15.18	15.50	No
		64	5320	15.13	15.50	No
	802.11n(HT40)	54	5270	15.47	15.50	No
		62	5310	15.25	15.50	No
	802.11ac(VHT40)	54	5270	15.45	15.50	No
		62	5310	15.26	15.50	No
	802.11ac(VHT80)	58	5290	15.79	16.00	Yes

Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-2c (5.470~5.725)	802.11a	100	5500	13.01	13.50	No
		120	5580	12.39	12.50	No
		140	5700	12.19	12.50	No
	802.11n(HT20)	100	5500	14.05	14.50	Yes
		120	5580	13.12	13.50	No
		140	5700	13.15	13.50	No
	802.11ac(VHT20)	100	5500	13.99	14.00	No
		120	5580	13.08	13.50	No
		140	5700	13.16	13.50	No
	802.11n(HT40)	102	5510	13.72	14.00	No
		118	5550	13.31	13.50	No
		134	5670	13.34	13.50	No
	802.11ac(VHT40)	102	5510	13.76	14.00	No
		118	5550	13.51	14.00	No
		134	5670	13.31	13.50	No
	802.11ac(VHT80)	106	5530	13.73	14.00	No
		122	5610	13.24	13.50	No

Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Maximum Tune-up(dBm)	SAR Test Require.
U-NII-3 (5.725~5.850)	802.11a	149	5745	11.88	12.00	No
		157	5785	11.81	12.00	No
		165	5825	11.99	12.00	No
	802.11n(HT20)	149	5745	12.87	13.00	No
		157	5785	12.64	13.00	No
		165	5825	12.86	13.00	No
	802.11ac(VHT20)	149	5745	12.80	13.00	No
		157	5785	12.56	13.00	No
		165	5825	12.89	13.00	No
	802.11n(HT40)	151	5755	12.86	13.00	No
		159	5795	12.93	13.00	No
	802.11ac(VHT40)	151	5755	12.82	13.00	No
		159	5795	12.78	13.00	No
	802.11ac(VHT80)	155	5775	13.62	14.00	Yes

Bluetooth

EDR	Mode	Maximum Tune-up(dBm)	Conducted Output Power (dBm)		
			0	39	78
			2402MHz	2441MHz	2480MHz
	GFSK	5.00	3.60	4.58	3.98
	$\pi/4$ QPSK	4.00	2.83	3.78	3.14
BLE	8DPSK	4.00	2.80	3.76	3.12
	Mode	Maximum Tune-up(dBm)	Conducted Output Power (dBm)		
			0	20	39
			2402MHz	2440MHz	2480MHz
	1Mbps	-2.50	-3.44	-2.58	-3.27
	2Mbps	-2.50	-3.40	-2.59	-3.26

10. Low-Power Exemption

10.1 Tune-up Power

Mode	Tune-up Power (dBm)
GSM 850	32.00
GSM 1900	29.00
WCDMA II	21.50
WCDMA IV	18.50
WCDMA V	21.00
LTE Band 2	22.50
LTE Band 4	23.00
LTE Band 5	22.00
LTE Band 7	23.00
LTE Band 12	22.50
LTE Band 13	23.50
LTE Band 17	22.50
LTE Band 25	23.00
LTE Band 26 part 90	22.50
LTE Band 26 part 22	22.00
LTE Band 30	19.50
LTE Band 38	19.50
LTE Band 41	20.00
LTE Band 66	20.00
LTE Band 71	22.00
2.4G WIFI	15.50
5.2G WIFI	16.50
5.4G WIFI	16.00
5.6G WIFI	14.50
5.8G WIFI	14.00
Bluetooth	5.00

10.2 RF Emissions Lower Power Exemption

Mode	Tune-up Power (dBm)	MIF	Power + MIF(dB)	C63.19 Lowest RFAIPL(dBm)	C63.19 Test Required?
GSM 850	32.00	3.30	35.30	29.00	Yes
GSM 1900	29.00	3.30	32.30	26.00	Yes
WCDMA II	21.50	-27.20	-5.70	26.00	No
WCDMA IV	18.50	-27.20	-8.70	26.00	No
WCDMA V	21.00	-27.20	-6.20	29.00	No
LTE Band 2	22.50	-15.60	6.90	26.00	No
LTE Band 4	23.00	-15.60	7.40	26.00	No
LTE Band 5	22.00	-15.60	6.40	29.00	No
LTE Band 7	23.00	-15.60	7.40	25.00	No
LTE Band 12	22.50	-15.60	6.90	29.00	No
LTE Band 13	23.50	-15.60	7.90	29.00	No
LTE Band 17	22.50	-15.60	6.90	29.00	No
LTE Band 25	23.00	-15.60	7.40	26.00	No
LTE Band 26 part 90	22.50	-15.60	6.90	29.00	No
LTE Band 26 part 22	22.00	-15.60	6.40	29.00	No
LTE Band 30	19.50	-15.60	3.90	25.00	No
LTE Band 38	19.50	-15.60	3.90	25.00	No
LTE Band 41	20.00	-1.60	18.40	25.00	No
LTE Band 66	20.00	-15.60	4.40	26.00	No
LTE Band 71	22.00	-15.60	6.40	29.00	No
2.4G WIFI	15.50	-2.02	13.48	25.00	No
5.2G WIFI	16.50	-5.57	10.93	25.00	No
5.4G WIFI	16.00	-5.57	10.43	25.00	No
5.6G WIFI	14.50	-5.57	8.93	25.00	No
5.8G WIFI	14.00	-5.57	8.43	25.00	No
Bluetooth	5.00	1.00	6.00	25.00	No

Note:

1. Use maximum power plus worst case MIF to determine whether it complies with RFAIPL.
2. If maximum power plus worst case MIF does not comply with RFAIPL, then further evaluation RFAIPL include in section 11.2.
3. EDGE data modes is not necessary due the GSM Voice mode is the worst case.
4. According to ANSI C63.19 2019, if maximum power plus worst case MIF is complies with RFAIPL, means compliance with WD emission requirements.

11. Test Equipment List

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
PC	Dell	N/A	N/A	N/A	N/A
Test Software	MVG	N/A	OpenHAC V5.1.3	N/A	N/A
COMOHAC E-field Probe	MVG	SCE	07/22 EPH50	2025/02/05	2026/02/04
COMOHAC 800-950MHz reference dipole	MVG	SIDB835	07/22 DHA69	2025/05/27	2028/05/26
COMOHAC 1700-2000MHz reference dipole	MVG	SIDB1900	07/22 DHB70	2025/05/27	2028/05/26
6 1/2 Digital Multimeter	Keithley	DMM6500	4527164	2025/10/17	2026/10/16
MXG Vector Signal Generator	Agilent	N5182A	MY46240163	2025/10/17	2026/10/16
E-Series Avg. Power Sensor	KEYSIGHT	E9300A	MY55050017	2025/04/02	2026/04/01
EPM Series Power Meter	KEYSIGHT	E4418B	MY41293435	2025/04/02	2026/04/01
10DB Attenuator	MIDWEST MICROWAVE	263-10dB	/	2025/04/02	2026/04/01
Coupler	MERRIMAC	CWM-10R-10.8G	LOT-83391	2025/10/17	2026/10/16
Wideband Radio Communication Tester	ROHDE & SCHWARZ	CMW500	161997	2025/10/17	2026/10/16

ANNEX A HAC RF System Validation Result

E-Field Scan							
Mode	Frequency (MHz)	Input Power (mW)	Measured Value (dBV/m)	Target Value (V/m)	Target Value (dBV/m)	Deviation (%)	Limit (%)
CW	835	100	46.58	223.21	46.97	-0.83%	±10
CW	1900	100	42.96	151.75	43.62	-1.51%	±10

System check at 835.00 MHz

Date of measurement: 5/1/2026

Experimental Conditions

Probe	SN_0722_EPH50
Signal	CW
Band	CW835
Channels	middle
Channels Number	-
Frequency (MHz)	835.00


Results

E-field average [dB(V/m)]	46.58
Right E-field maximum [dB(V/m)]	46.55
Left E-field maximum [dB(V/m)]	46.61

Scan parameter

Scan area: length (mm), width (mm)	20.00, 150.00
Measurement point spacing (mm)	5
distance to reference plane (mm)	8.00
X and Y offset with the reference point (mm)	0.00, 0.00
Number of measurement points	155

RF audio interference near field

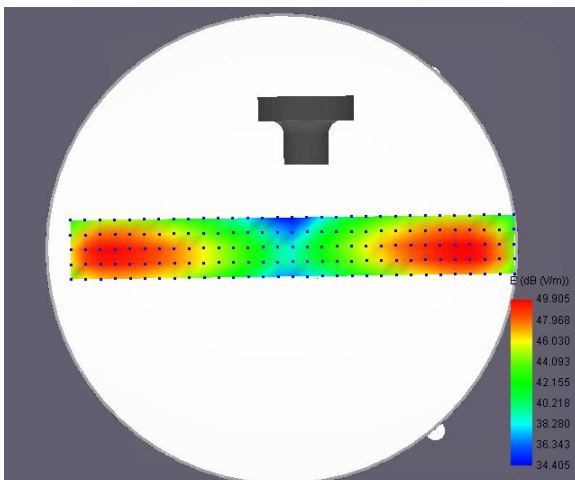

System check at 1900.00 MHz

Date of measurement: 5/1/2026

Experimental Conditions

Probe	SN_0722_EPH50
Signal	CW
Band	CW1900
Channels	middle
Channels Number	-
Frequency (MHz)	1900.00


Results

E-field average [dB(V/m)]	42.96
Right E-field maximum [dB(V/m)]	42.66
Left E-field maximum [dB(V/m)]	43.24

Scan parameter

Scan area: length (mm), width (mm)	20.00, 80.00
Measurement point spacing (mm)	5
distance to reference plane (mm)	8.00
X and Y offset with the reference point (mm)	0.00, 0.00
Number of measurement points	85

RF audio interference near field

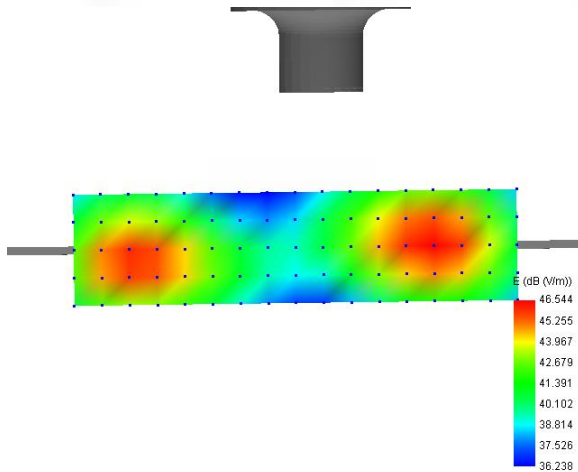

ANNEX B HAC RF Measurement Result

Band	Channel	Frequency (MHz)	RF audio interference level [dB(V/m)]	Device compliant	Plot
GSM850	Low (128)	824.2MHz	27.58	Yes	/
	Middle(190)	836.6MHz	27.66	Yes	/
	High(251)	848.8MHz	28.66	Yes	1#
GSM1900	Low (512)	1850.2MHz	28.11	Yes	/
	Middle(661)	1880.0MHz	28.45	Yes	2#
	High(810)	1909.8MHz	28.44	Yes	/

Measurement at GSM850

Date of measurement: 5/1/2026

Experimental Conditions

Probe	SN_0722_EPH50
Signal	GSM
Band	GSM850
Channels	high
Channels Number	251
Frequency (MHz)	848.80
MIF	0.00


Results

RF audio interference level [dB(V/m)]	28.66
Device compliant	Yes
Measurement status	Complete

Scan parameter

Scan area: length (mm), width (mm)	50.00, 50.00
Measurement point spacing (mm)	10
distance to reference plane (mm)	15.00
X and Y offset with the reference point (mm)	0.00, 0.00
Number of measurement points	36

RF audio interference near field

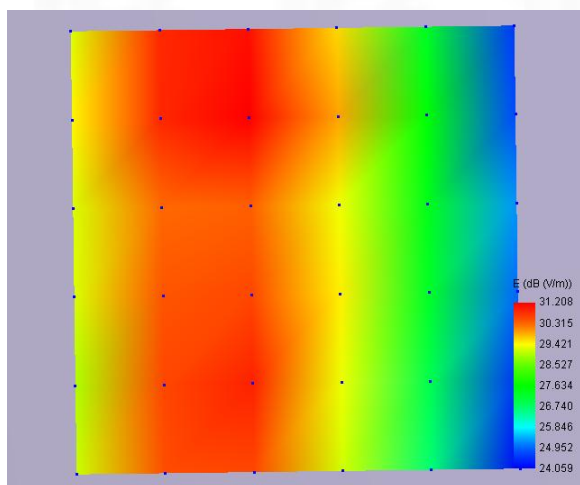

Measurement at GSM1900

Date of measurement: 5/1/2026

Experimental Conditions

Probe	SN_0722_EPH50
Signal	GSM
Band	GSM1900
Channels	middle
Channels Number	661
Frequency (MHz)	1880.00
MIF	0.00


Results

RF audio interference level [dB(V/m)]	28.45
Device compliant	Yes
Measurement status	Complete

Scan parameter

Scan area: length (mm), width (mm)	50.00, 50.00
Measurement point spacing (mm)	10
distance to reference plane (mm)	15.00
X and Y offset with the reference point (mm)	0.00, 0.00
Number of measurement points	36

RF audio interference near field

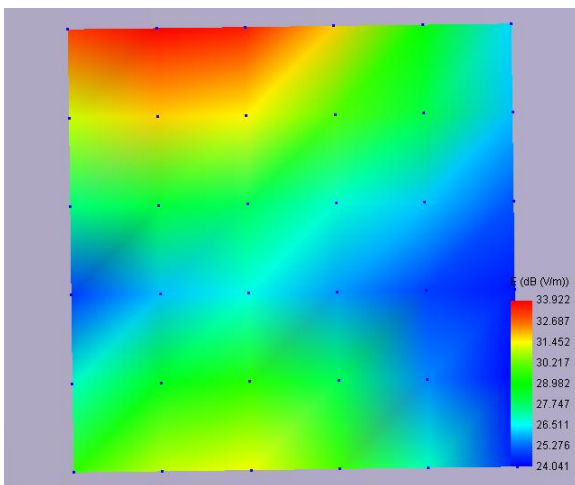

ANNEX C Test Setup Photos

Please refer to the document “ANNEX C Test Setup Photos_RF.pdf”.

ANNEX D EUT External & Internal Photos

Please refer to RF Report.

ANNEX E Calibration Information

Please refer to the document “Calibration.pdf”.



BTF Testing Lab (Shenzhen) Co., Ltd.

Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,
Bao'an District, Shenzhen, Guangdong, China

www.btf-lab.com

--END OF REPORT--