


Test Mode	TX G Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

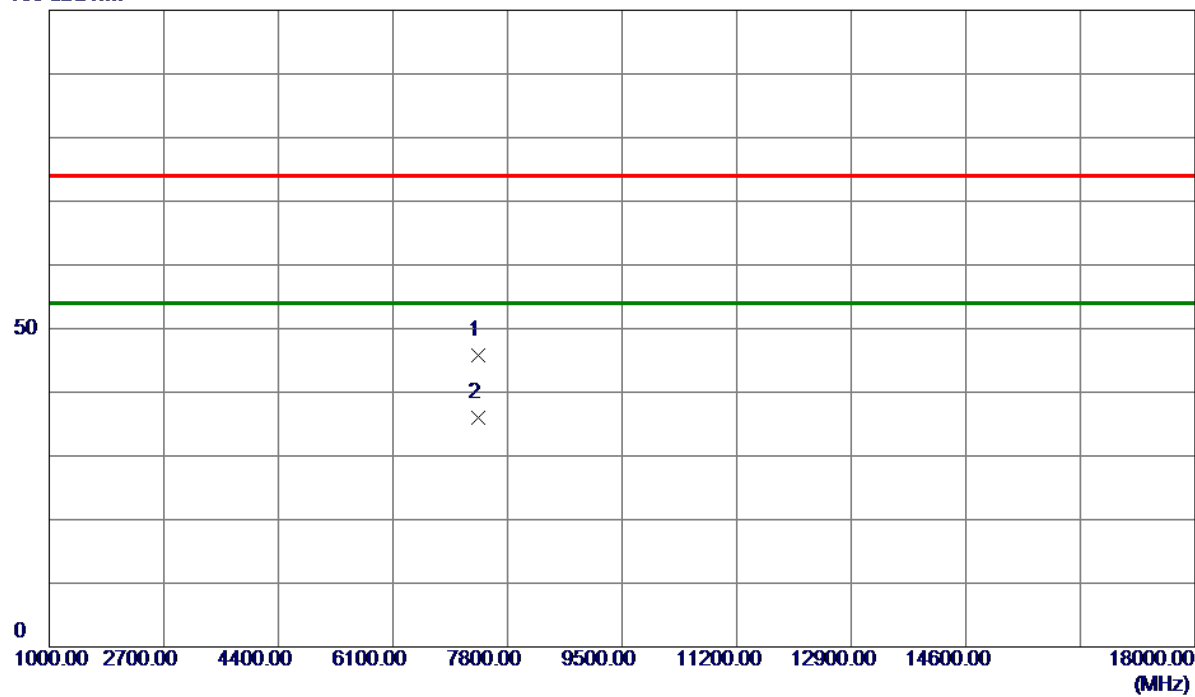


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7366.2500	36.38	9.51	45.89	74.00	-28.11	Peak	
2 *	7371.5000	26.51	9.50	36.01	54.00	-17.99	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT20) Mode 2412 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

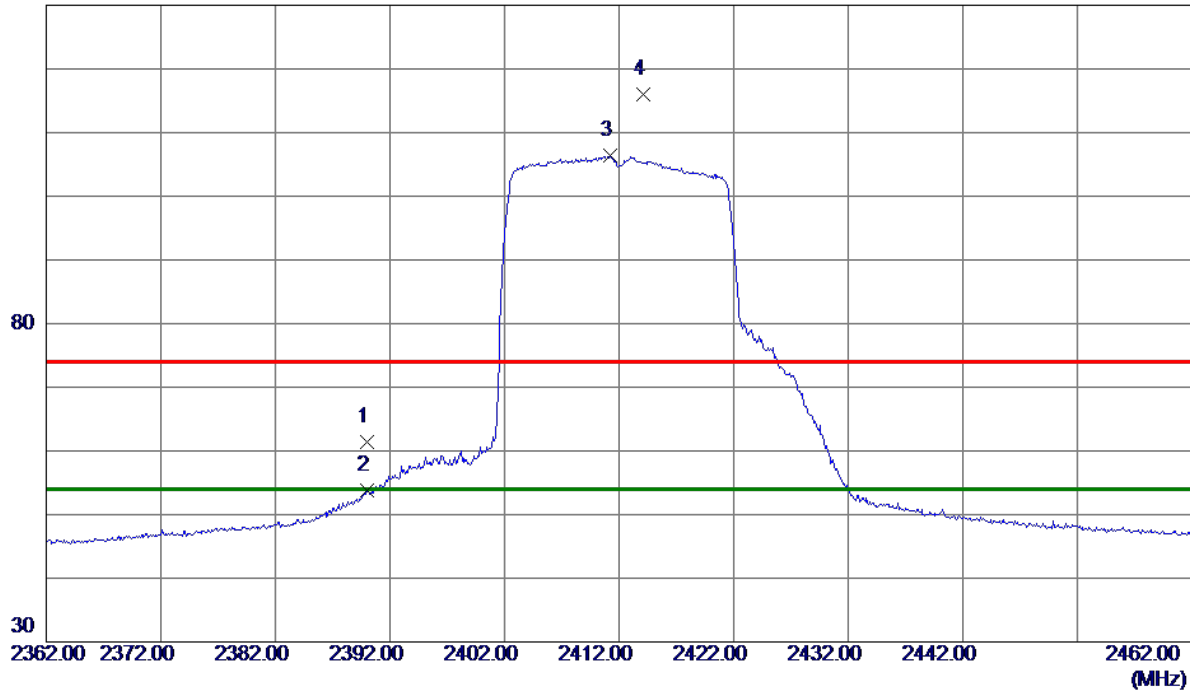


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	53.67	7.78	61.45	74.00	-12.55	Peak	
2	2390.0000	45.99	7.78	53.77	54.00	-0.23	AVG	
3 *	2411.2000	98.54	7.83	106.37	54.00	52.37	AVG	No Limit
4	2414.1000	108.21	7.83	116.04	74.00	42.04	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT20) Mode 2412 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

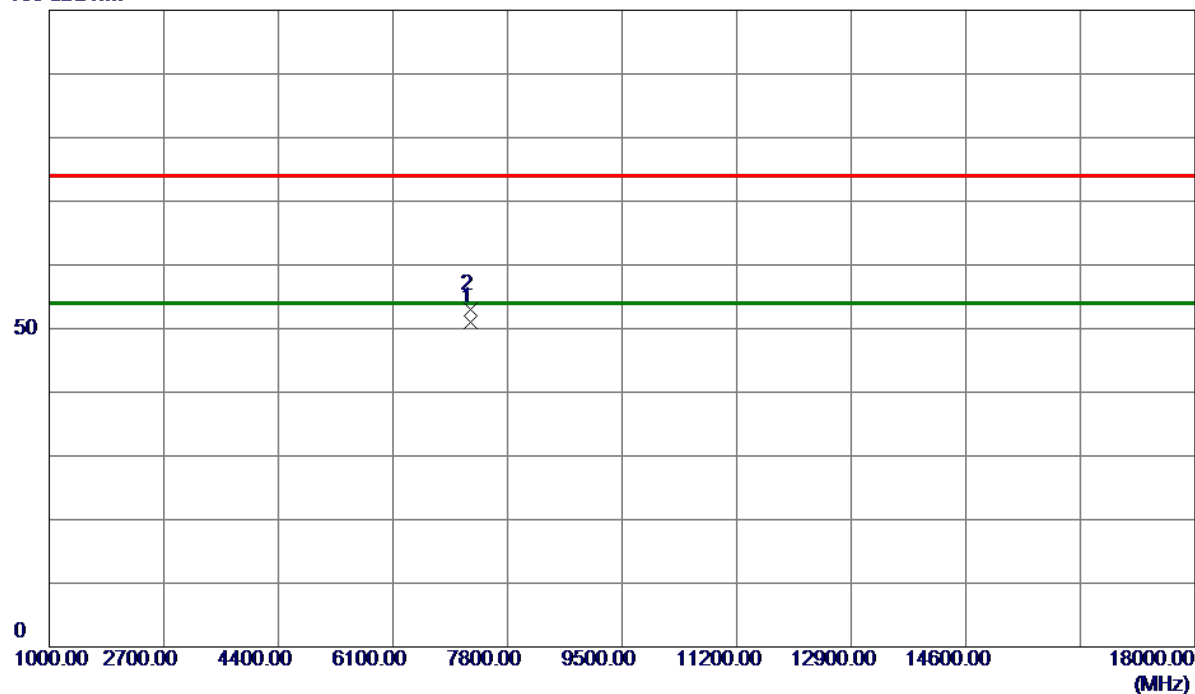


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7247.4000	41.39	9.59	50.98	54.00	-3.02	AVG	
2	7247.5000	43.46	9.59	53.05	74.00	-20.95	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT20) Mode 2437 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

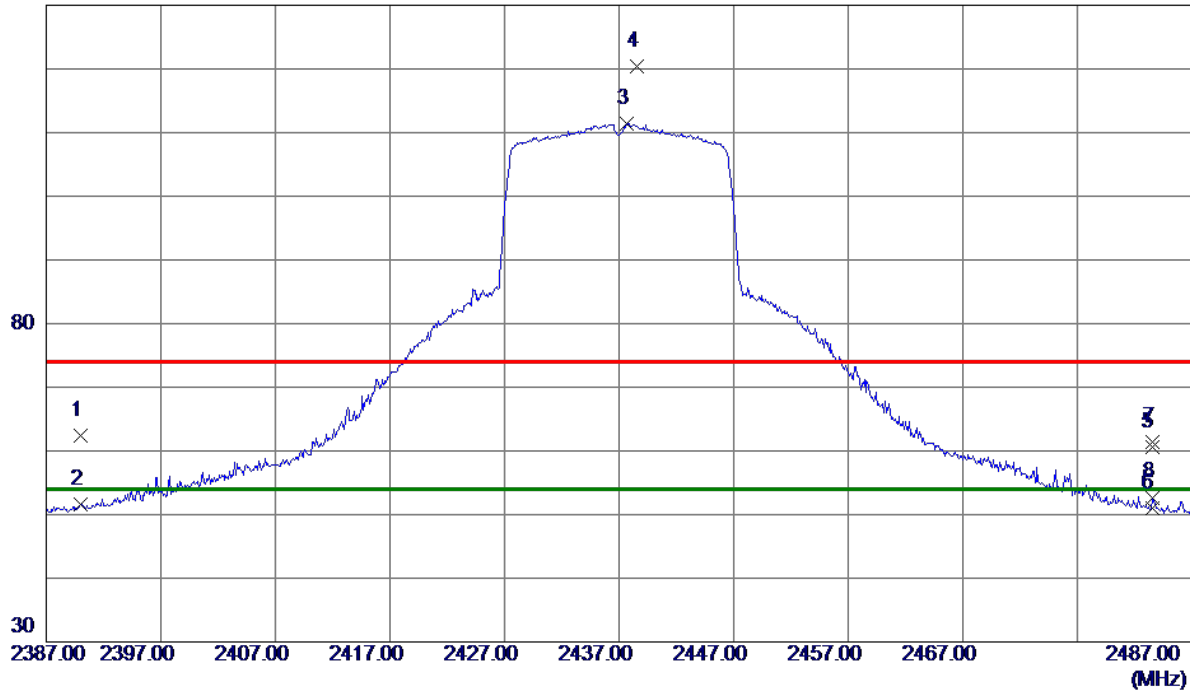

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	54.57	7.78	62.35	74.00	-11.65	Peak	
2	2390.0000	43.91	7.78	51.69	54.00	-2.31	AVG	
3 *	2437.7000	103.55	7.89	111.44	54.00	57.44	AVG	No Limit
4	2438.6000	112.58	7.89	120.47	74.00	46.47	Peak	No Limit
5	2483.5000	52.54	8.00	60.54	74.00	-13.46	Peak	
6	2483.5000	43.05	8.00	51.05	54.00	-2.95	AVG	
7	2483.6000	53.38	8.00	61.38	74.00	-12.62	Peak	
8	2483.6000	44.70	8.00	52.70	54.00	-1.30	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT20) Mode 2437 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

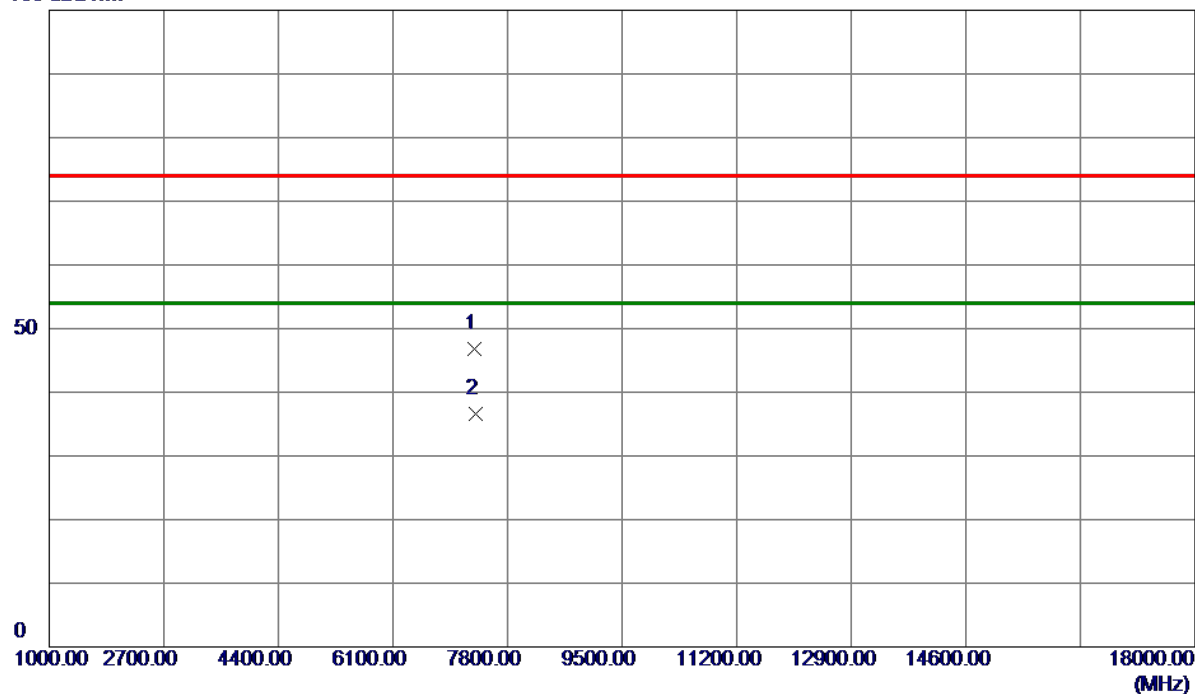


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7311.3000	37.31	9.55	46.86	74.00	-27.14	Peak	
2 *	7318.7500	27.07	9.54	36.61	54.00	-17.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT20) Mode 2462 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

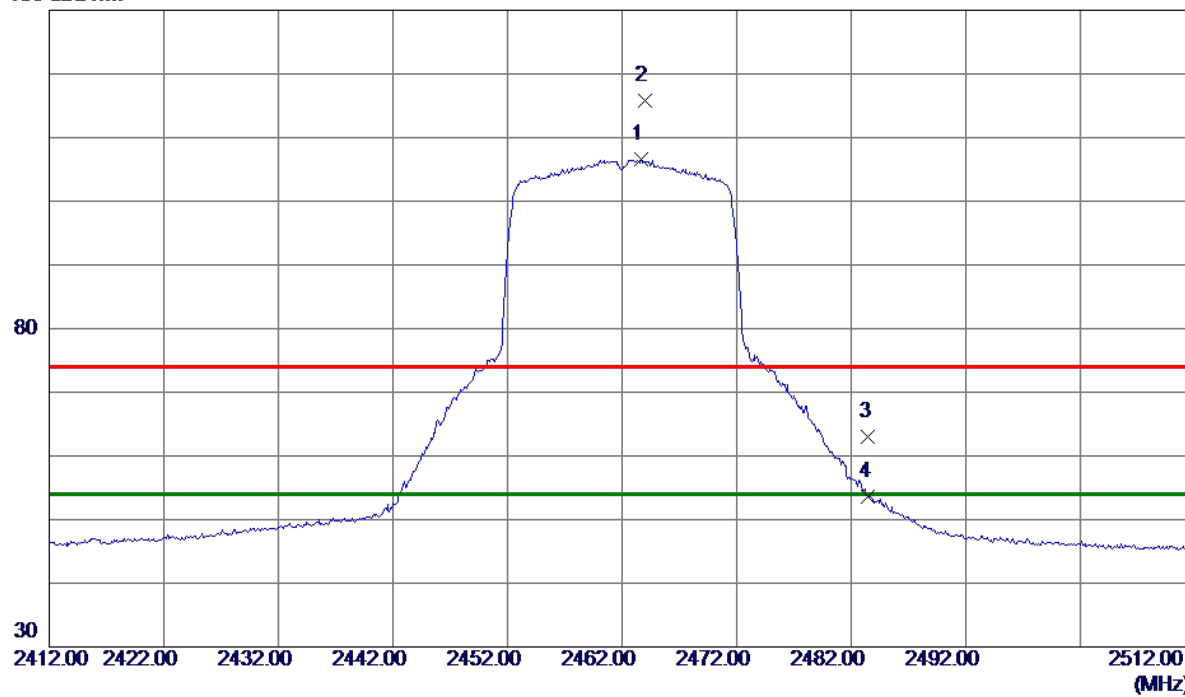


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2463.7000	98.62	7.95	106.57	54.00	52.57	AVG	No Limit
2	2464.0000	107.92	7.95	115.87	74.00	41.87	Peak	No Limit
3	2483.5000	55.09	8.00	63.09	74.00	-10.91	Peak	
4	2483.5000	45.57	8.00	53.57	54.00	-0.43	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT20) Mode 2462 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

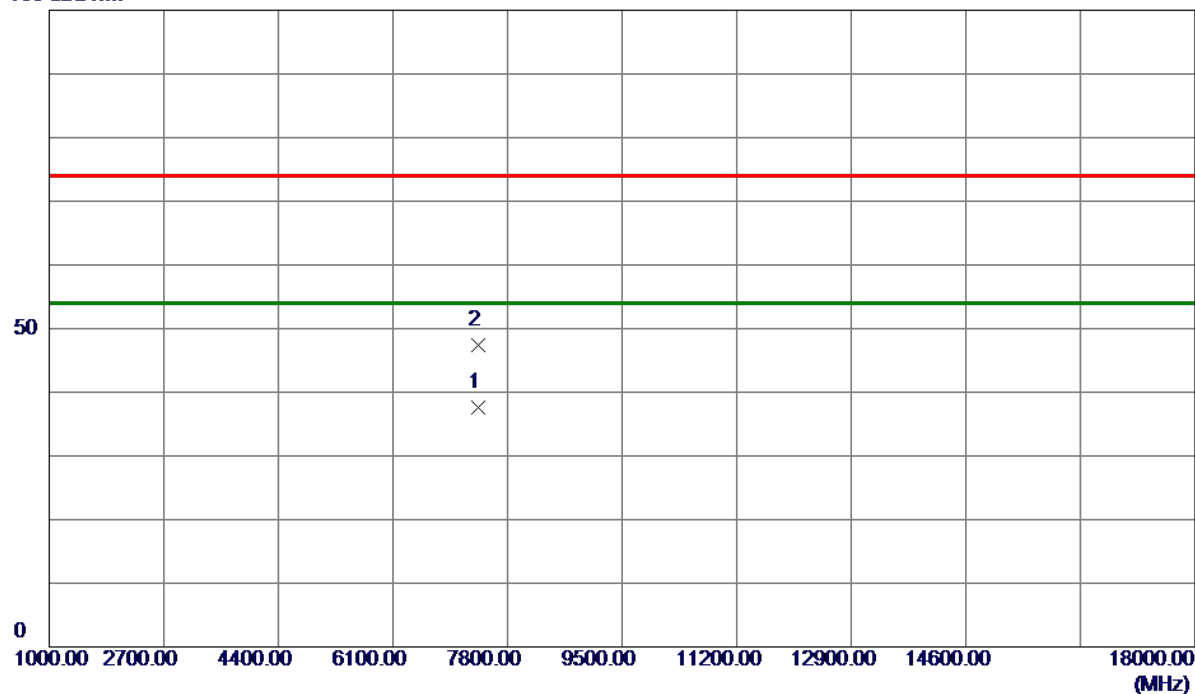


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7361.0000	28.18	9.51	37.69	54.00	-16.31	AVG	
2	7365.2000	37.91	9.51	47.42	74.00	-26.58	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT40) Mode 2422 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

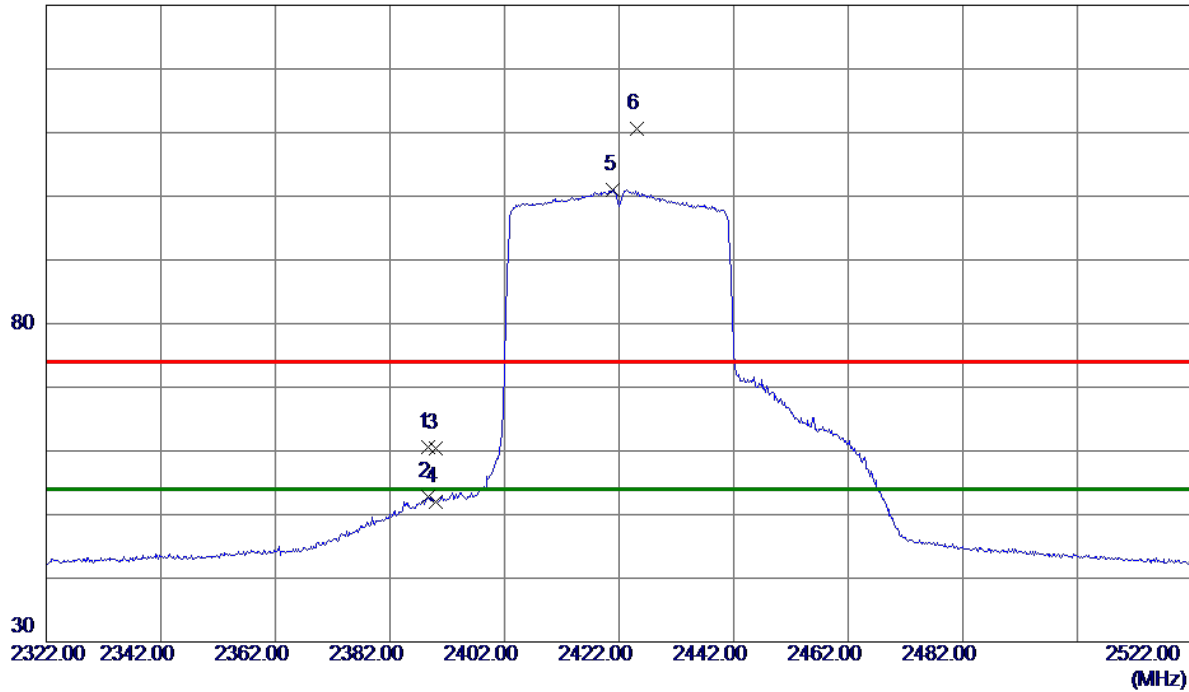

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2388.6000	52.83	7.77	60.60	74.00	-13.40	Peak	
2	2388.6000	44.95	7.77	52.72	54.00	-1.28	AVG	
3	2390.0000	52.68	7.78	60.46	74.00	-13.54	Peak	
4	2390.0000	44.21	7.78	51.99	54.00	-2.01	AVG	
5 *	2421.0000	93.14	7.85	100.99	54.00	46.99	AVG	No Limit
6	2425.2000	102.80	7.86	110.66	74.00	36.66	Peak	No Limit


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT40) Mode 2422 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

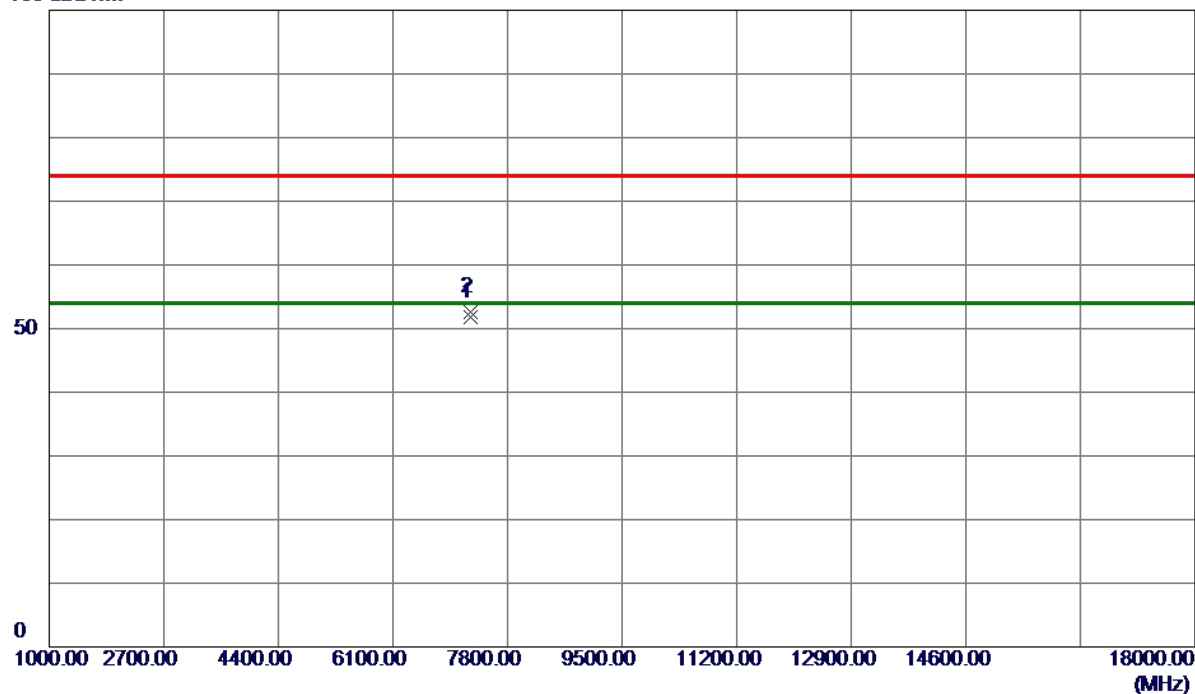


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	7247.4000	42.14	9.59	51.73	54.00	-2.27	AVG	
2	7247.7000	43.03	9.59	52.62	74.00	-21.38	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT40) Mode 2437 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

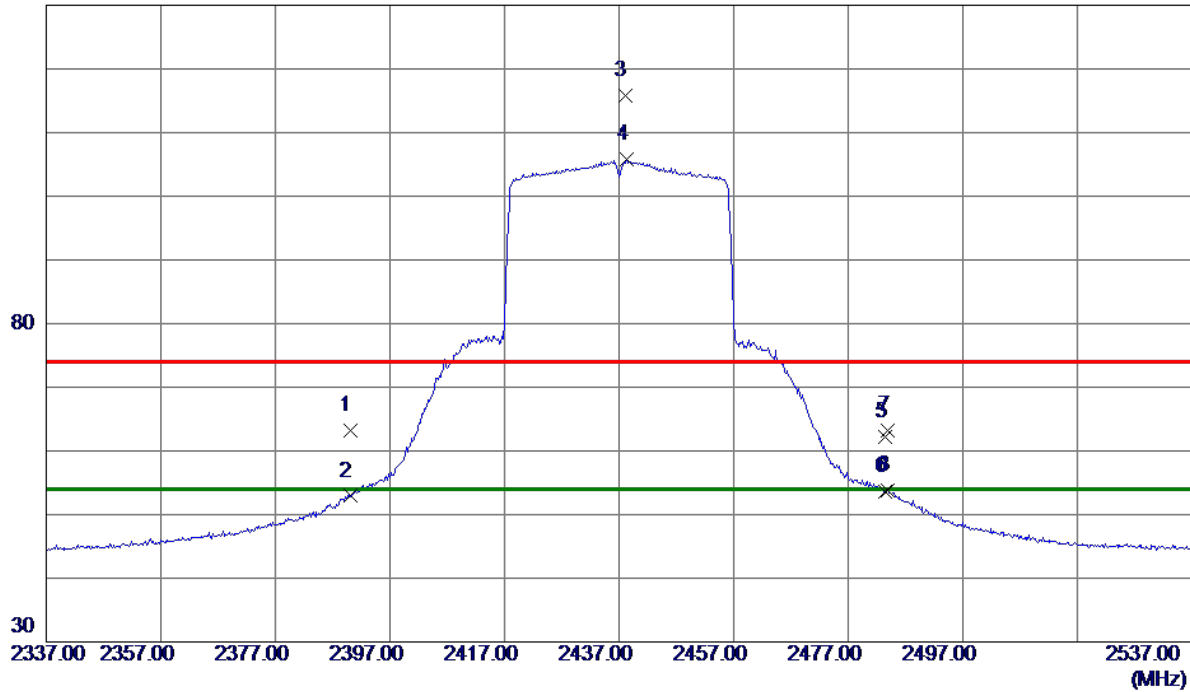

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	55.33	7.78	63.11	74.00	-10.89	Peak	
2	2390.0000	45.12	7.78	52.90	54.00	-1.10	AVG	
3	2438.0000	107.96	7.89	115.85	74.00	41.85	Peak	No Limit
4 *	2438.4000	97.83	7.89	105.72	54.00	51.72	AVG	No Limit
5	2483.5000	54.25	8.00	62.25	74.00	-11.75	Peak	
6	2483.5000	45.66	8.00	53.66	54.00	-0.34	AVG	
7	2483.8000	55.25	8.00	63.25	74.00	-10.75	Peak	
8	2483.8000	45.82	8.00	53.82	54.00	-0.18	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT40) Mode 2437 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

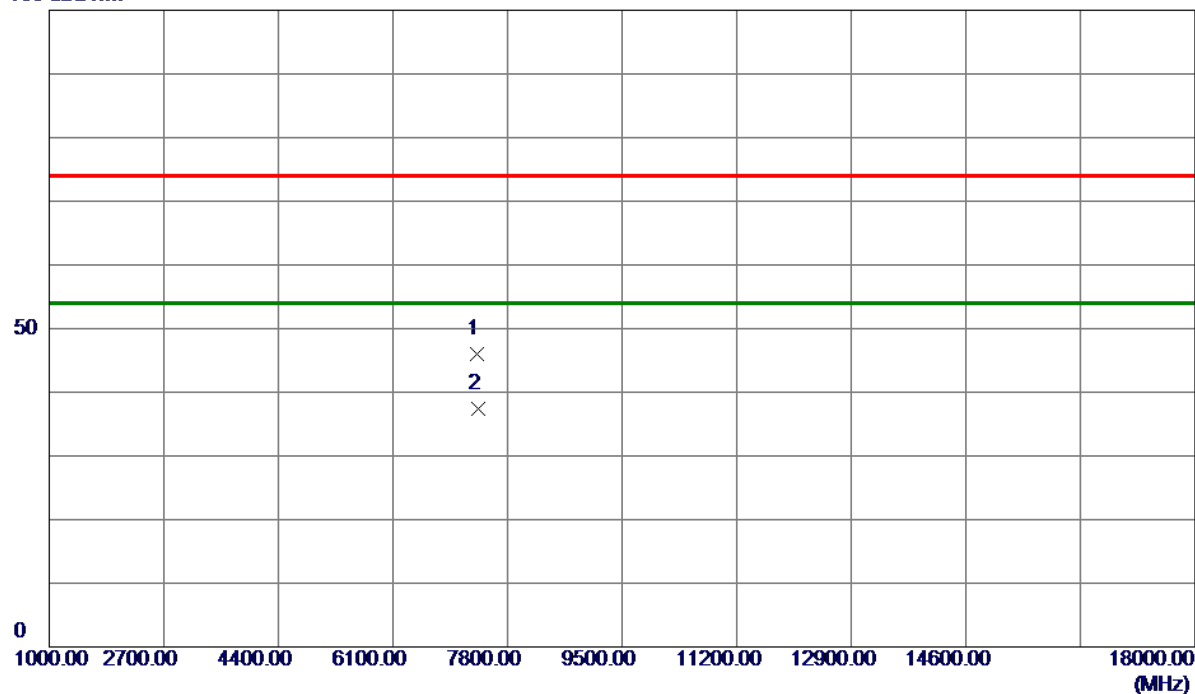


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7338.1000	36.52	9.53	46.05	74.00	-27.95	Peak	
2 *	7360.1000	27.84	9.51	37.35	54.00	-16.65	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT40) Mode 2452 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

130 dBuV/m

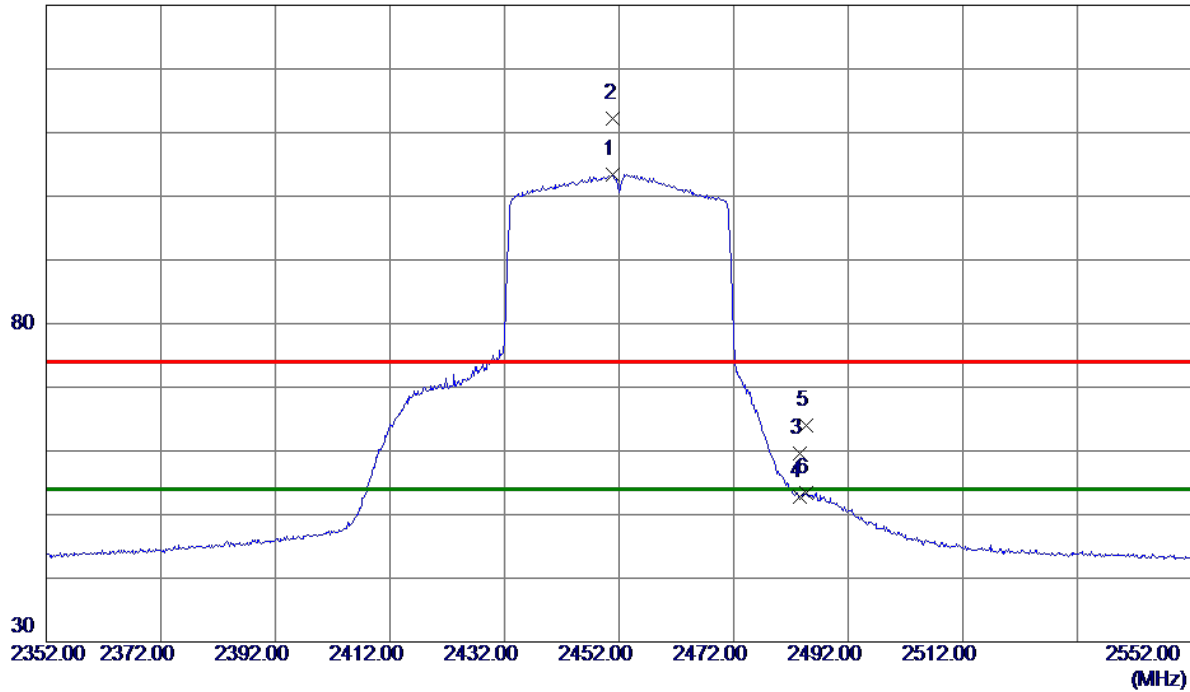

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2450.8000	95.47	7.92	103.39	54.00	49.39	AVG	No Limit
2	2451.0000	104.21	7.92	112.13	74.00	38.13	Peak	No Limit
3	2483.5000	51.55	8.00	59.55	74.00	-14.45	Peak	
4	2483.5000	44.76	8.00	52.76	54.00	-1.24	AVG	
5	2484.6000	56.07	8.00	64.07	74.00	-9.93	Peak	
6	2484.6000	45.43	8.00	53.43	54.00	-0.57	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT40) Mode 2452 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

100 dBuV/m

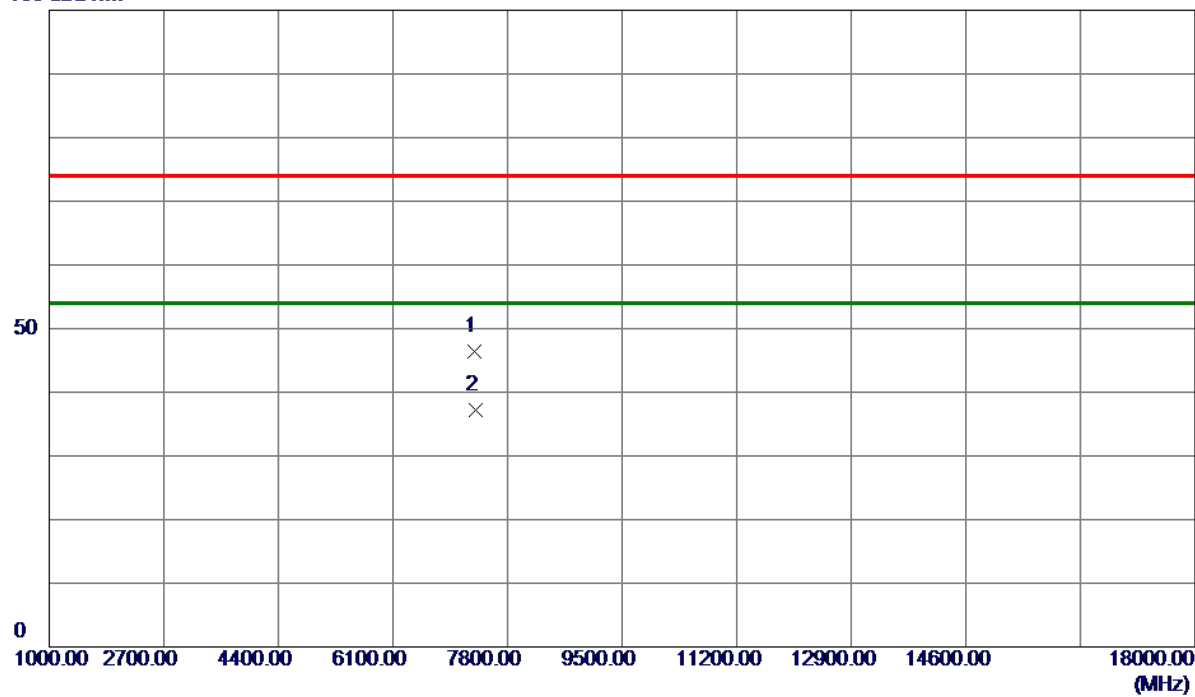


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7310.3000	36.80	9.55	46.35	74.00	-27.65	Peak	
2 *	7337.2000	27.70	9.53	37.23	54.00	-16.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

100 dBuV/m

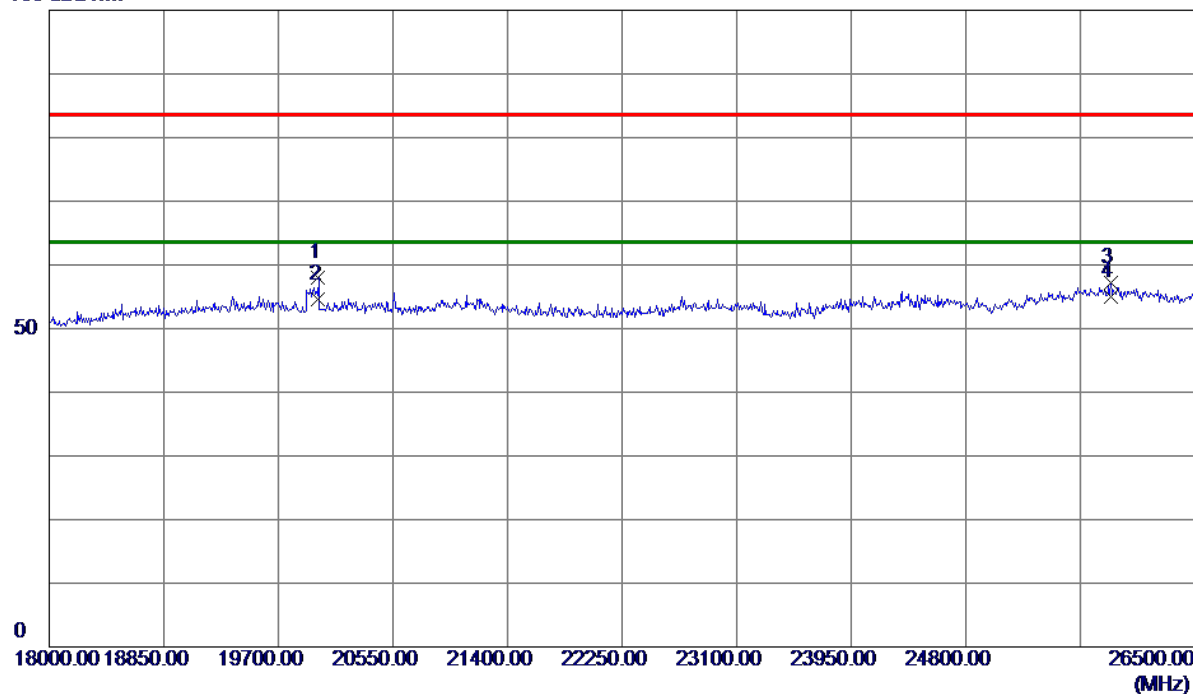


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	19997.5000	54.74	3.28	58.02	83.50	-25.48	Peak	
2	19997.5000	51.27	3.28	54.55	63.50	-8.95	AVG	
3	25879.5000	51.02	6.26	57.28	83.50	-26.22	Peak	
4 *	25879.5000	48.68	6.26	54.94	63.50	-8.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2437 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

100 dBuV/m

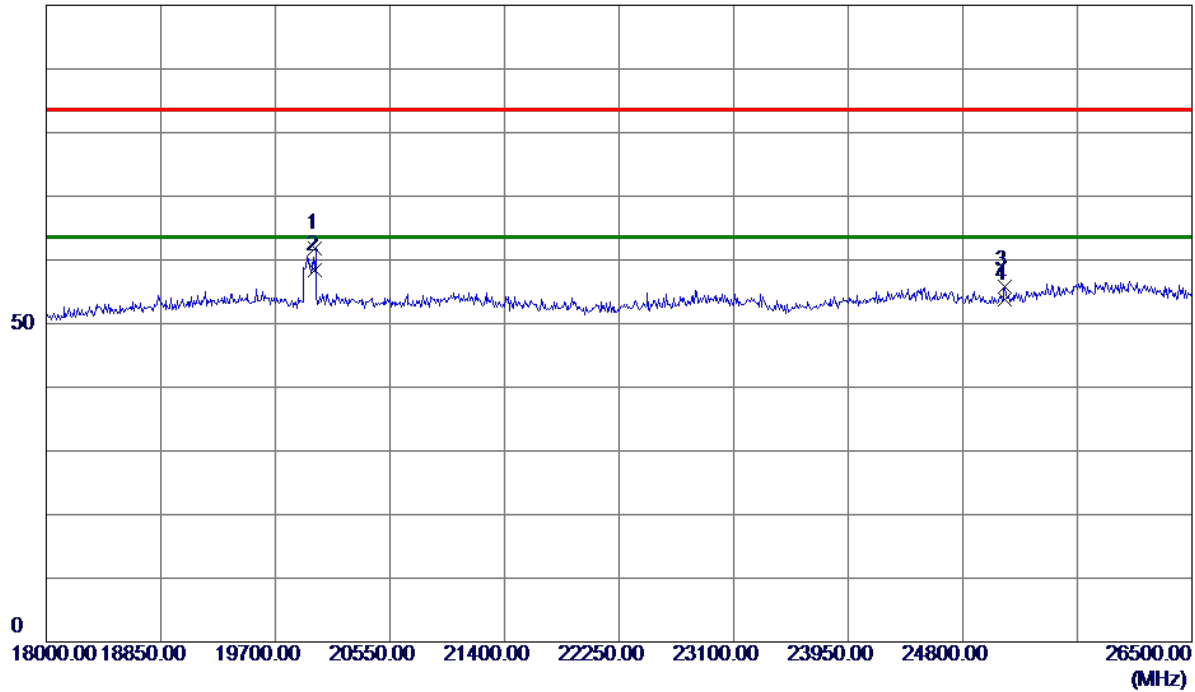


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	19997.5000	58.50	3.28	61.78	83.50	-21.72	Peak	
2 *	19997.5000	55.12	3.28	58.40	63.50	-5.10	AVG	
3	25114.5000	51.18	4.72	55.90	83.50	-27.60	Peak	
4	25114.5000	49.05	4.72	53.77	63.50	-9.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

The worst case:

Test Mode	TX BE(EHT40) Mode 2422 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

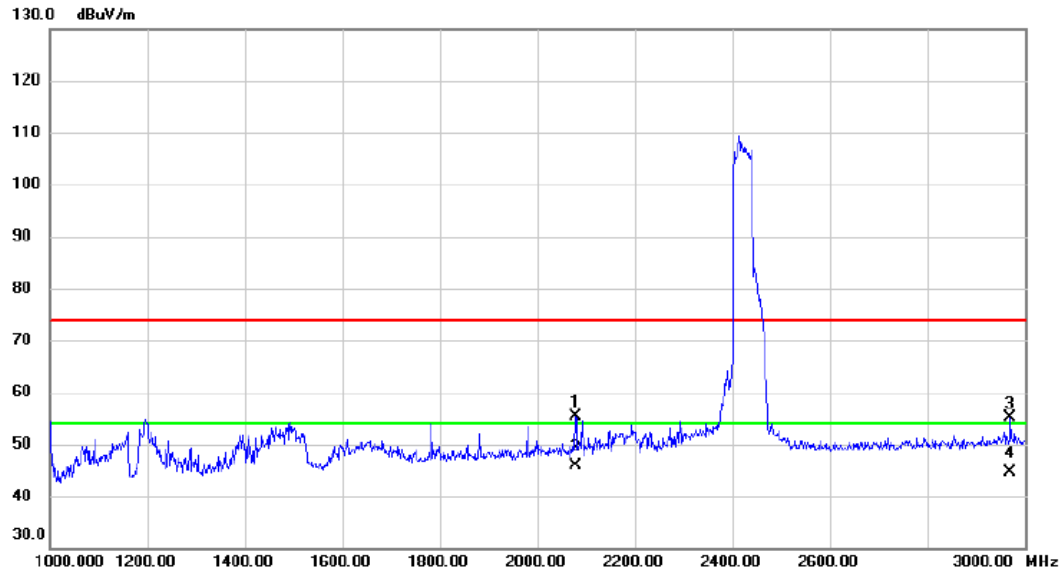


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2078.000	47.60	7.85	55.45	74.00	-18.55	peak	
2	*	2078.000	37.91	7.85	45.76	54.00	-8.24	AVG	
3		2970.000	44.76	10.34	55.10	74.00	-18.90	peak	
4		2970.000	34.25	10.34	44.59	54.00	-9.41	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX BE(EHT40) Mode 2422 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

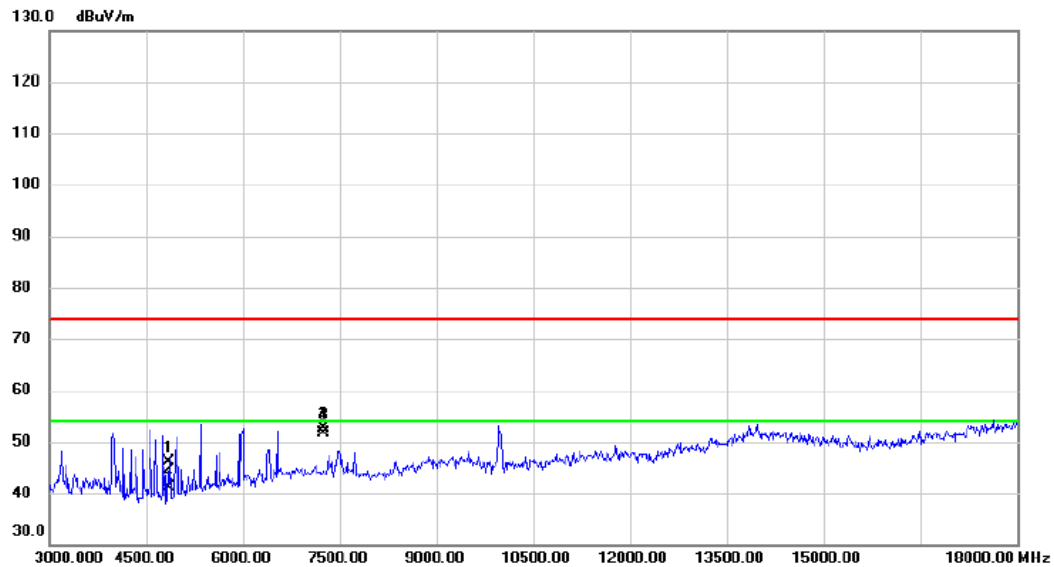

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4851.000	42.51	3.50	46.01	74.00	-27.99	peak	
2		4851.000	37.72	3.50	41.22	54.00	-12.78	AVG	
3	*	7247.400	41.66	10.07	51.73	54.00	-2.27	AVG	
4		7247.700	42.55	10.07	52.62	74.00	-21.38	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH


Test Mode TX B Mode

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	10.120	15.417	0.5	Pass
06	2437	12.640	18.216	0.5	Pass
11	2462	12.600	34.168	0.5	Pass


CH01

CH06
6 dB Bandwidth

CH11

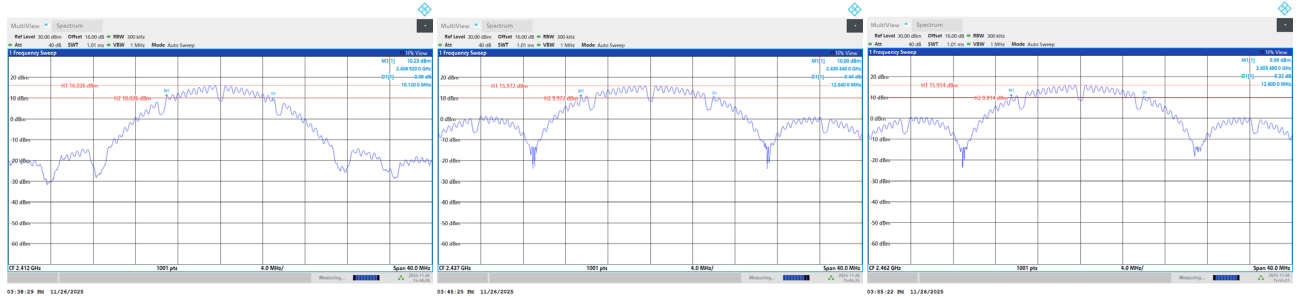

99 % Occupied Bandwidth

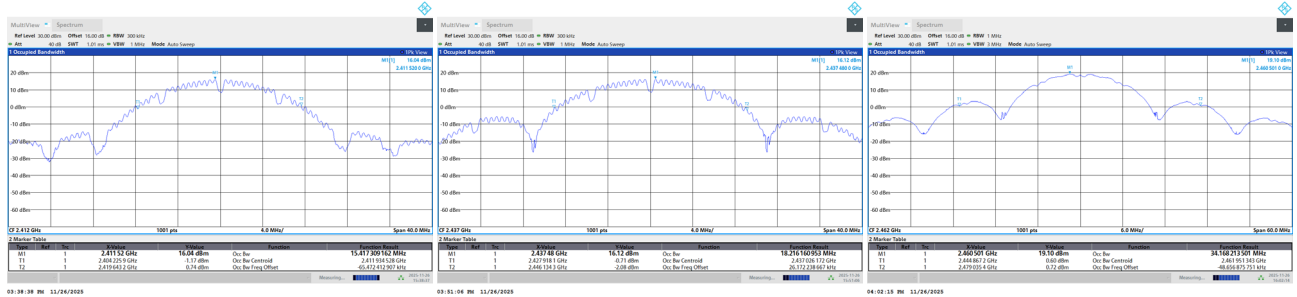


Test Mode TX G Mode

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	16.360	16.572	0.5	Pass
06	2437	16.560	48.696	0.5	Pass
11	2462	16.440	48.426	0.5	Pass


CH01

CH06
6 dB Bandwidth

CH11

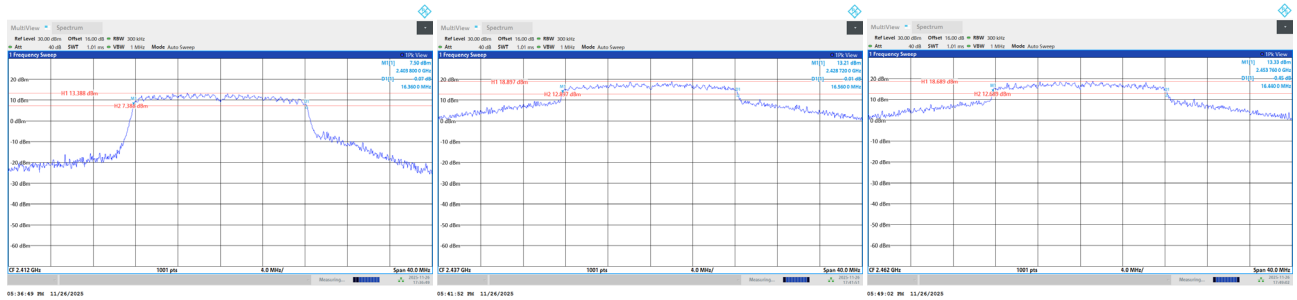

99 % Occupied Bandwidth

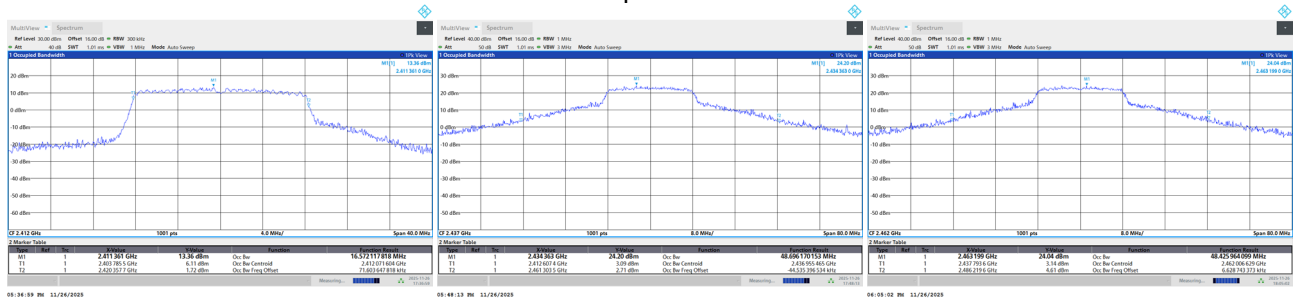


Test Mode TX BE(EHT20) Mode

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	18.920	18.892	0.5	Pass
06	2437	19.240	44.330	0.5	Pass
11	2462	19.040	39.244	0.5	Pass


CH01

CH06
6 dB Bandwidth

CH11

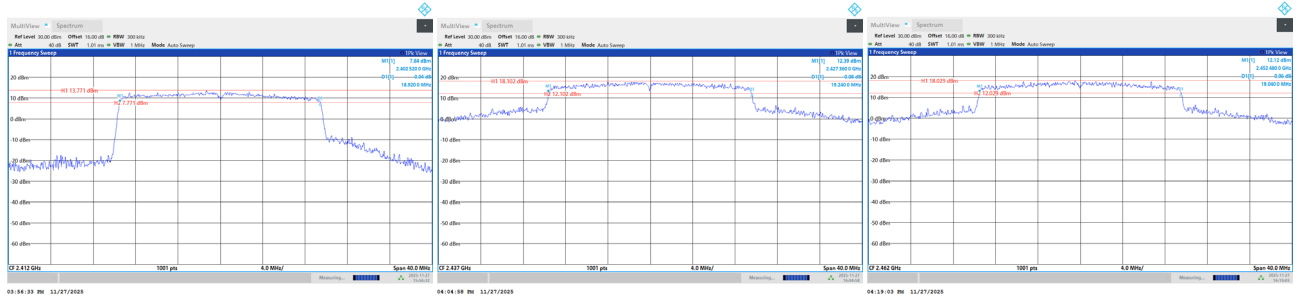

99 % Occupied Bandwidth

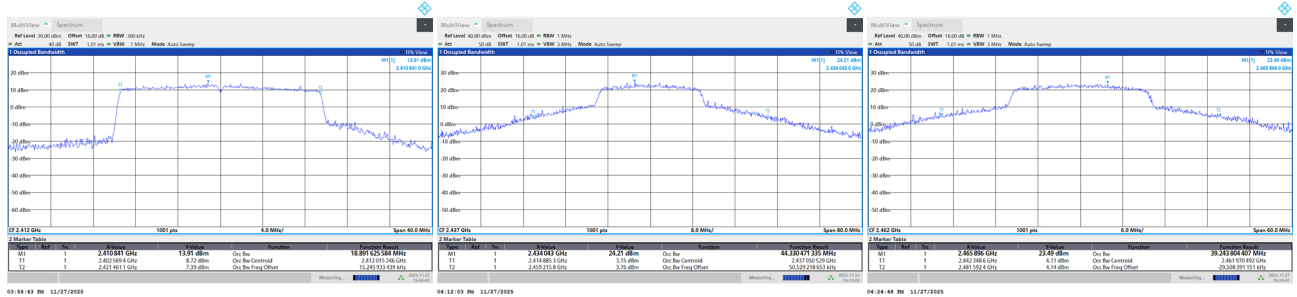


Test Mode	TX BE(EHT40) Mode
-----------	-------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
03	2422	37.520	37.945	0.5	Pass
06	2437	37.120	37.988	0.5	Pass
09	2452	37.760	47.659	0.5	Pass


CH03

CH06
6 dB Bandwidth

CH09

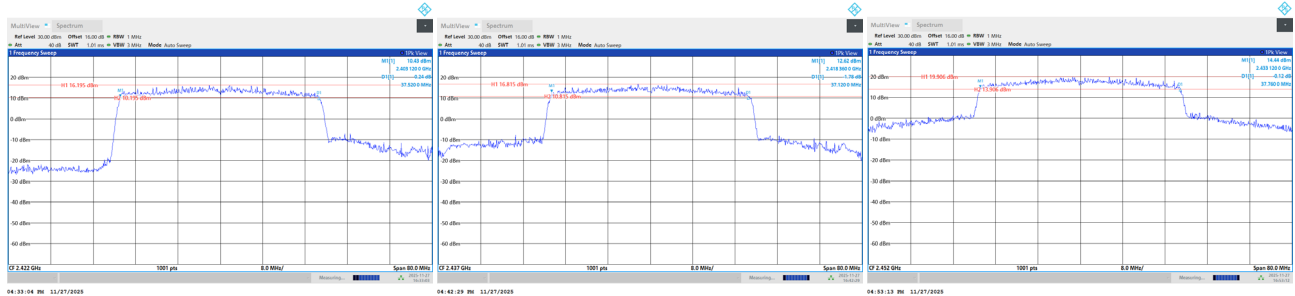

99 % Occupied Bandwidth

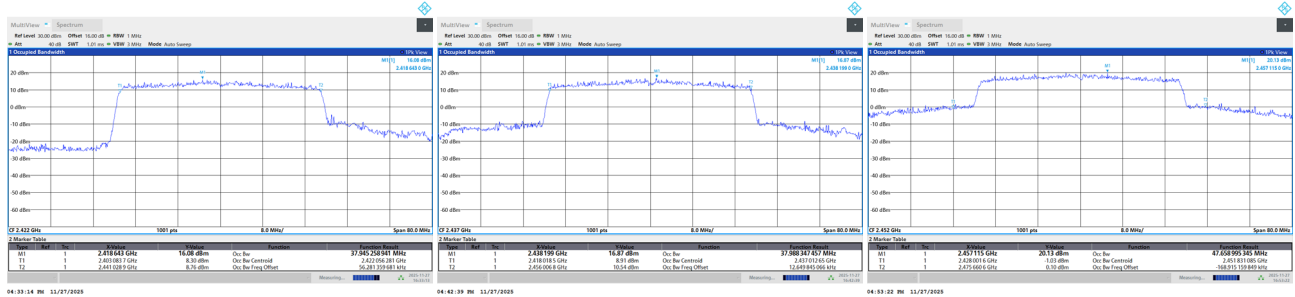

APPENDIX F - MAXIMUM OUTPUT POWER

Test Mode	TX B Mode_Ant 1
-----------	-----------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	18.34	0.00	18.34	30.00	1.0000	Pass
06	2437	21.46	0.00	21.46	30.00	1.0000	Pass
11	2462	19.68	0.00	19.68	30.00	1.0000	Pass

Test Mode	TX B Mode_Ant 2
-----------	-----------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	17.53	0.00	17.53	30.00	1.0000	Pass
06	2437	20.25	0.00	20.25	30.00	1.0000	Pass
11	2462	19.12	0.00	19.12	30.00	1.0000	Pass

Test Mode	TX B Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	20.96	30.00	1.0000	Pass
06	2437	23.91	30.00	1.0000	Pass
11	2462	22.42	30.00	1.0000	Pass

Test Mode	TX G Mode_Ant 1
-----------	-----------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.04	0.16	16.20	30.00	1.0000	Pass
06	2437	20.16	0.16	20.32	30.00	1.0000	Pass
11	2462	17.63	0.16	17.79	30.00	1.0000	Pass

Test Mode	TX G Mode_Ant 2
-----------	-----------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	15.38	0.16	15.54	30.00	1.0000	Pass
06	2437	18.57	0.16	18.73	30.00	1.0000	Pass
11	2462	17.87	0.16	18.03	30.00	1.0000	Pass

Test Mode	TX G Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	18.89	30.00	1.0000	Pass
06	2437	22.61	30.00	1.0000	Pass
11	2462	20.92	30.00	1.0000	Pass

Test Mode	TX BE(EHT20) Mode_Ant 1
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	14.09	0.20	14.29	30.00	1.0000	Pass
06	2437	20.19	0.20	20.39	30.00	1.0000	Pass
11	2462	15.67	0.20	15.87	30.00	1.0000	Pass

Test Mode	TX BE(EHT20) Mode_Ant 2
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	13.47	0.20	13.67	30.00	1.0000	Pass
06	2437	18.79	0.20	18.99	30.00	1.0000	Pass
11	2462	16.13	0.20	16.33	30.00	1.0000	Pass

Test Mode	TX BE(EHT20) Mode_Total
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	17.00	30.00	1.0000	Pass
06	2437	22.75	30.00	1.0000	Pass
11	2462	19.11	30.00	1.0000	Pass

Test Mode	TX BE(EHT40) Mode_Ant 1
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	11.35	0.18	11.53	30.00	1.0000	Pass
06	2437	16.29	0.18	16.47	30.00	1.0000	Pass
09	2452	14.27	0.18	14.45	30.00	1.0000	Pass

Test Mode	TX BE(EHT40) Mode_Ant 2
-----------	-------------------------

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dB)	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	10.74	0.18	10.92	30.00	1.0000	Pass
06	2437	15.64	0.18	15.82	30.00	1.0000	Pass
09	2452	13.67	0.18	13.85	30.00	1.0000	Pass

Test Mode	TX BE(EHT40) Mode_Total
-----------	-------------------------


Channel	Frequency (MHz)	Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	14.25	30.00	1.0000	Pass
06	2437	19.17	30.00	1.0000	Pass
09	2452	17.18	30.00	1.0000	Pass

Note: Output power = Measure result + Cable loss


APPENDIX G - CONDUCTED SPURIOUS EMISSIONS

Test Mode TX B Mode_Ant. 1


Reference Level-CH01

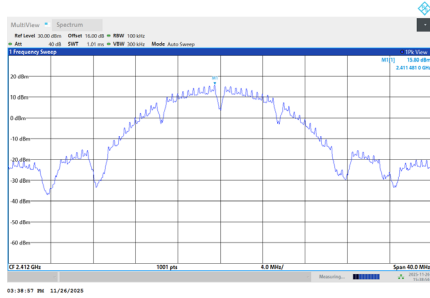


Reference Level-CH06

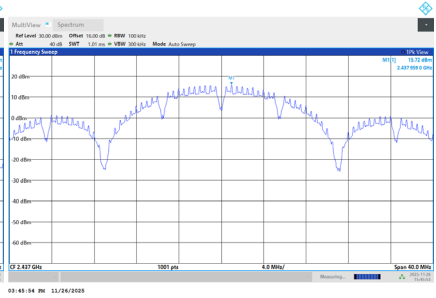


Reference Level-CH11

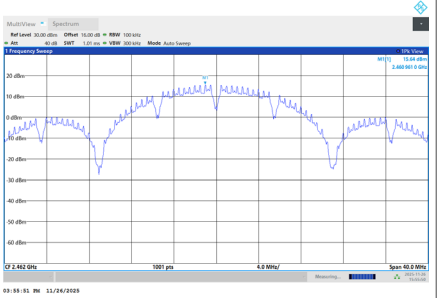


Bandedge-CH01

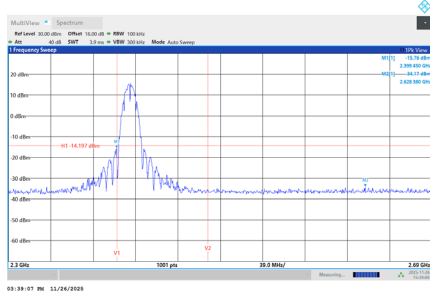


Bandedge-CH11

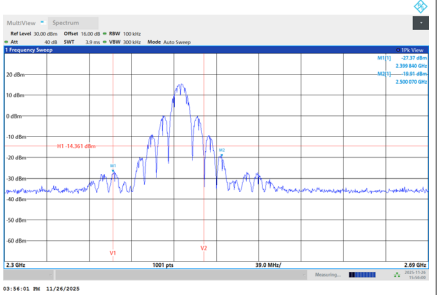


Harmonic-CH01

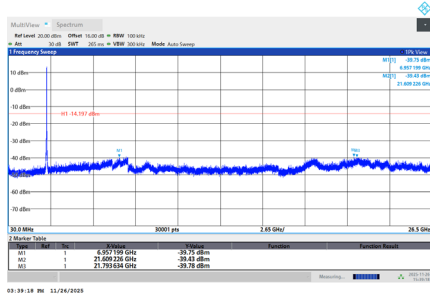

Harmonic-CH06

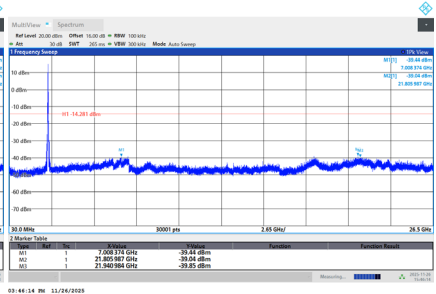


Harmonic-CH11

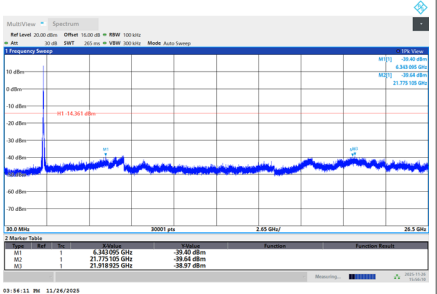


Test Mode TX B Mode_Ant. 2


Reference Level-CH01

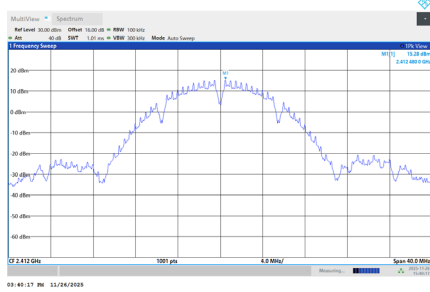


Reference Level-CH06

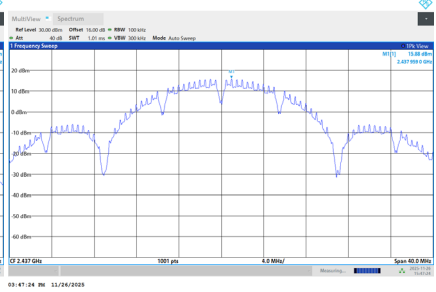


Reference Level-CH11

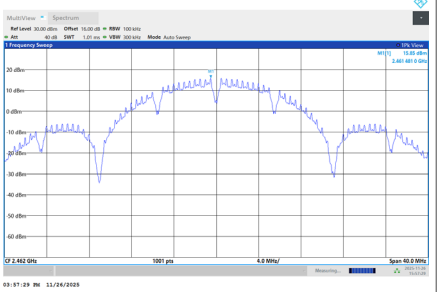


Bandedge-CH01

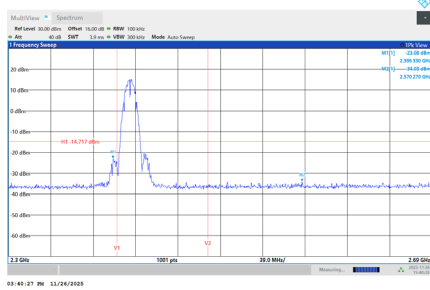


Bandedge-CH11

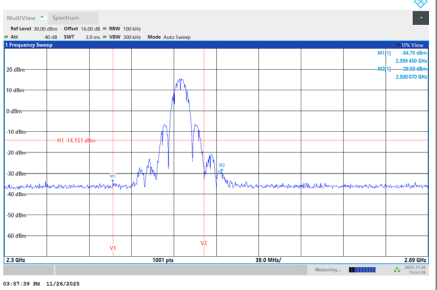


Harmonic-CH01

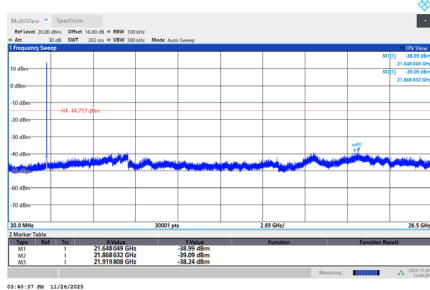

Harmonic-CH06

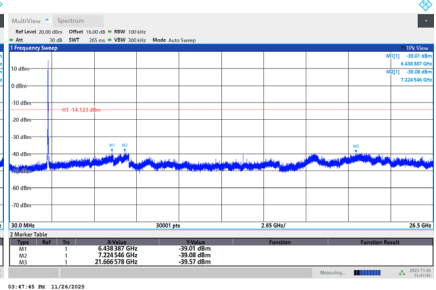


Harmonic-CH11

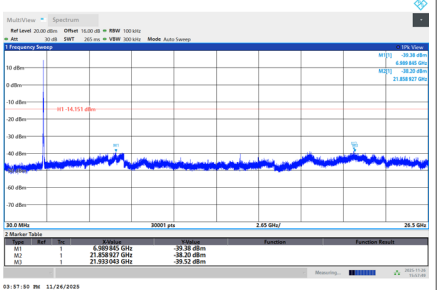


Test Mode TX G Mode_Ant. 1


Reference Level-CH01

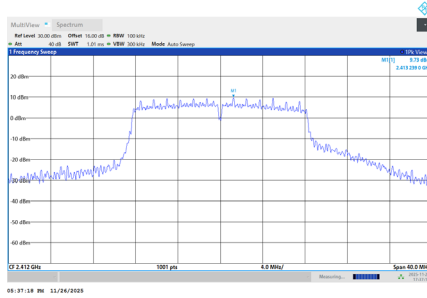


Reference Level-CH06

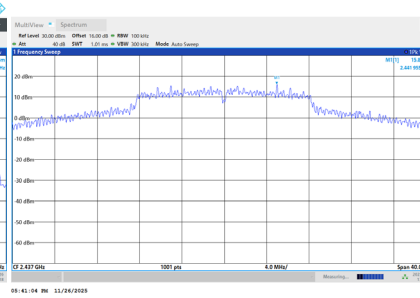


Reference Level-CH11

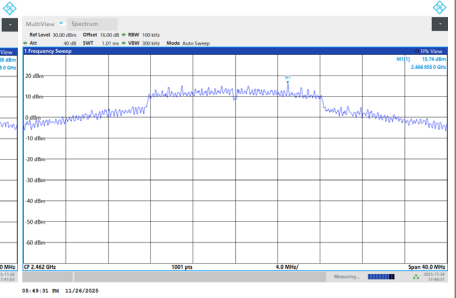


Bandedge-CH01

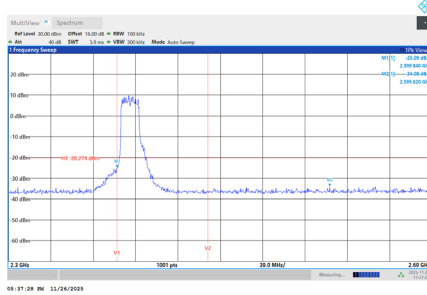


Bandedge-CH11

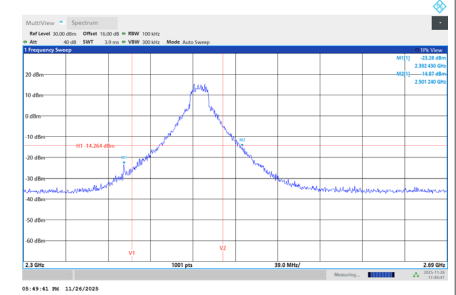


Harmonic-CH01

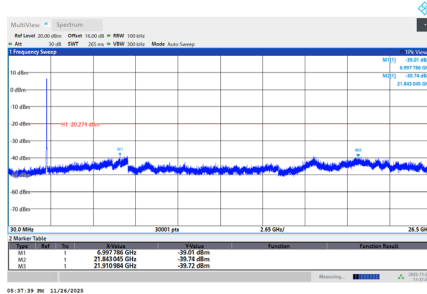

Harmonic-CH06

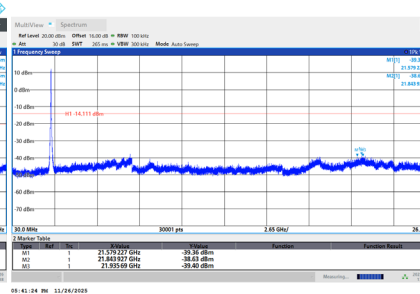


Harmonic-CH11

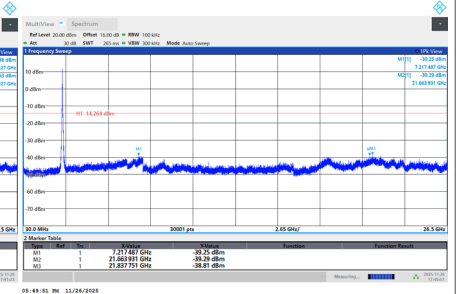


Test Mode TX G Mode_Ant. 2


Reference Level-CH01

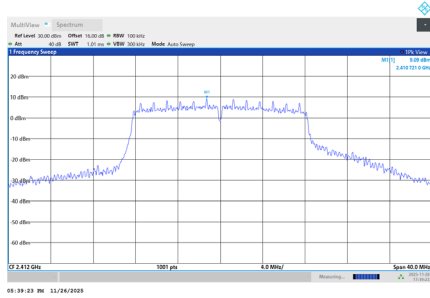


Reference Level-CH06

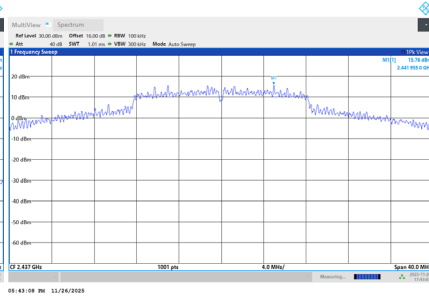


Reference Level-CH11

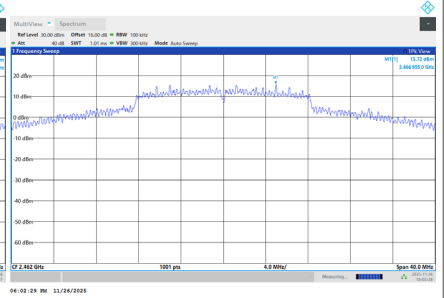


Bandedge-CH01

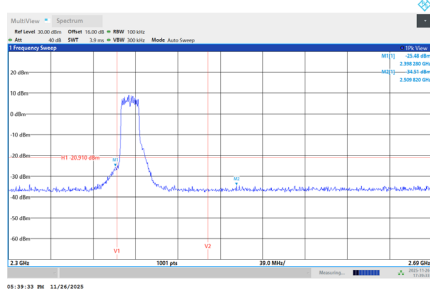


Bandedge-CH11

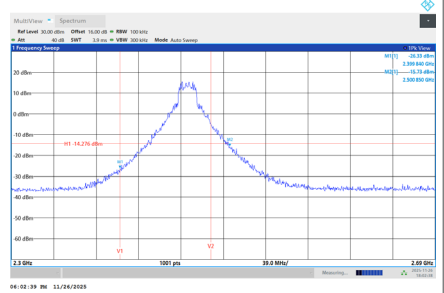


Harmonic-CH01

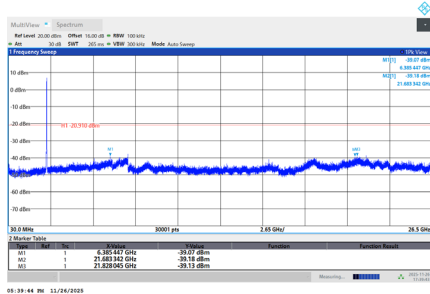

Harmonic-CH06

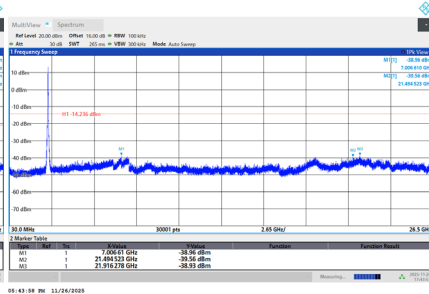


Harmonic-CH11

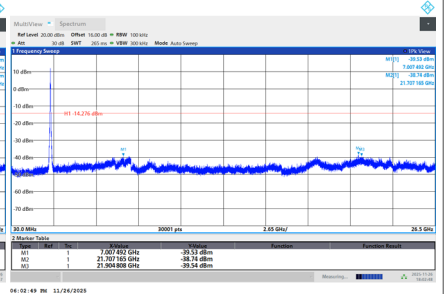


Test Mode TX BE(EHT20) Mode_Ant. 1


Reference Level-CH01

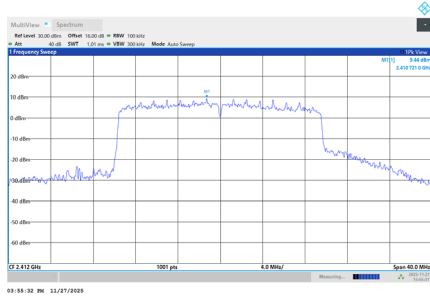


Reference Level-CH06

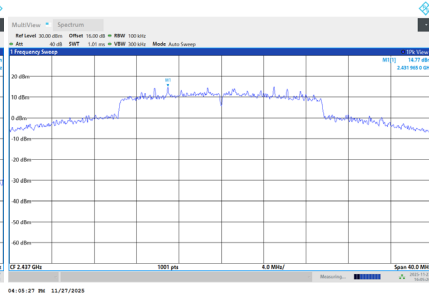


Reference Level-CH11

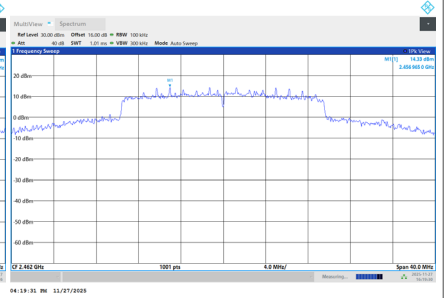


Bandedge-CH01

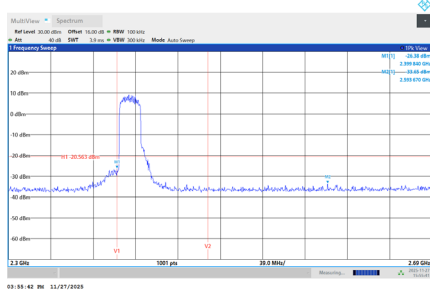


Bandedge-CH11

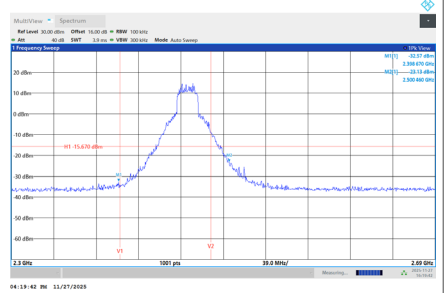


Harmonic-CH01

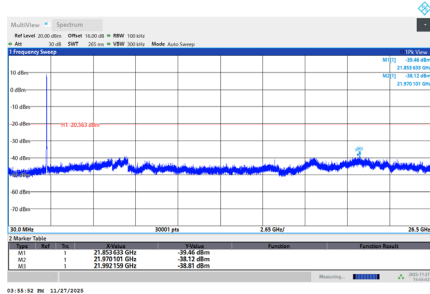

Harmonic-CH06

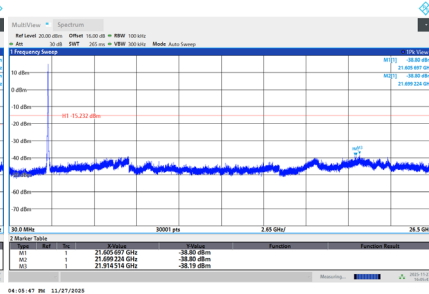


Harmonic-CH11

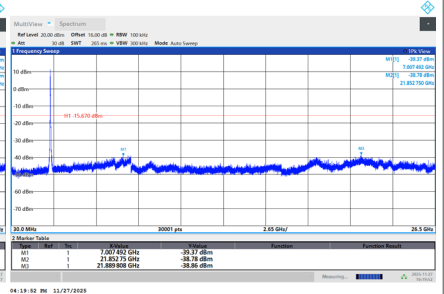


Test Mode TX BE(EHT20) Mode_Ant. 2


Reference Level-CH01

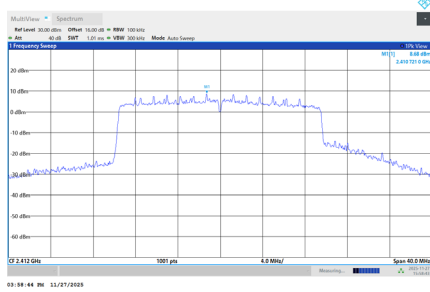


Reference Level-CH06

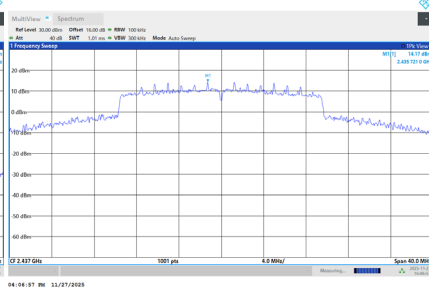


Reference Level-CH11

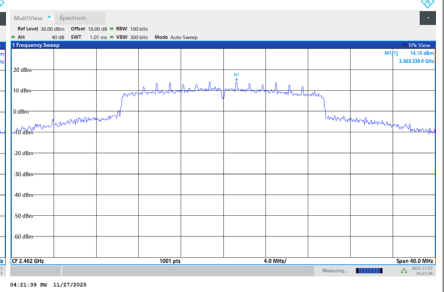


Bandedge-CH01

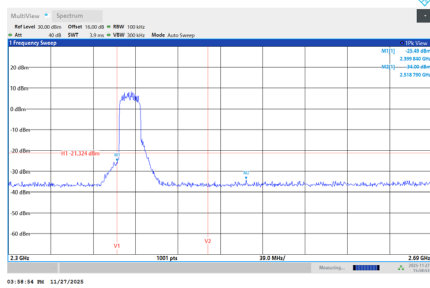


Bandedge-CH11

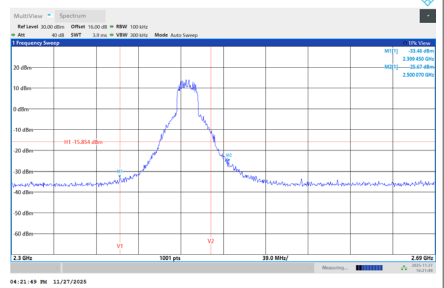

Harmonic-CH01

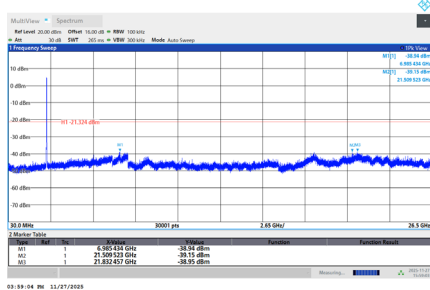

Harmonic-CH06

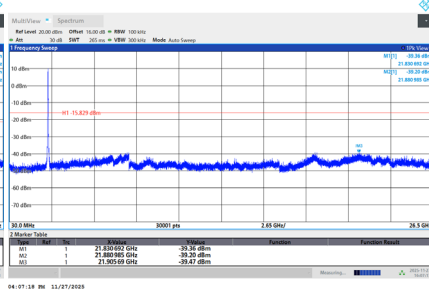

Harmonic-CH11

