

TEST REPORT

FCC ID: 2ADYY-K15SDA-1

Product: Laptop Computer

Model No.: K15SDA

Trade Mark: TECNO

Report No.: WSCT-ANAB-R&E250700057A-LE

Issued Date: 14 August 2025

Issued for:

TECNO MOBILE LIMITED

FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI
STREET FOTAN NT HONGKONG

Issued By:

World Standardization Certification & Testing Group(Shenzhen) Co.,Ltd.
Building A-B,Baoli'an Industrial Park,No.58 and 60,Tangtuo Avenue, Shiyan
Street,Bao'an District, Shenzhen City, Guangdong Province, China

TEL: +86-755-26996192

FAX: +86-755-86376605

Note: This report shall not be reproduced except in full, without the written approval of World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. This document may be altered or revised by World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. Test Certification	3
2. Test Result Summary	4
3. EUT Description.....	5
4. Genera Information.....	7
4.1. TEST ENVIRONMENT AND MODE	7
4.2. DESCRIPTION OF SUPPORT UNITS	8
5. Facilities and Accreditations	9
5.1. FACILITIES	9
5.2. ACCREDITATIONS	9
5.3. MEASUREMENT UNCERTAINTY	10
5.4. MEASUREMENT INSTRUMENTS	11
6. Test Results and Measurement Data	12
6.1. ANTENNA REQUIREMENT.....	12
6.2. CONDUCTED EMISSION	14
6.3. CONDUCTED PEAK OUTPUT POWER.....	18
6.4. EMISSION BANDWIDTH.....	21
6.5. POWER SPECTRAL DENSITY	32
6.6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT	53
6.7. RADIATED SPURIOUS EMISSION MEASUREMENT	84
7 Test Setup Photographs	95

1. Test Certification

Product:	Laptop Computer
Model No.:	K15SDA
Trade Mark:	TECNO
Applicant:	TECNO MOBILE LIMITED
Address:	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Manufacturer:	TECNO MOBILE LIMITED
Address:	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Date of Test:	04 July 2025 to 11 August 2025
Applicable Standards:	FCC CFR Title 47 Part 15 Subpart C Section 15.247

The above equipment has been tested by World Standardization Certification & Testing Group(Shenzhen)Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

Wang Xiang

(Wang Xiang)

Checked By:

Qin Shuiquan

(Qin Shuiquan)

Approved By:

Li Huaibi

(Li Huaibi)

Date:

14 August 2025

2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Conducted Peak Output Power	§15.247 (b)(3) §2.1046	PASS
6dB Emission Bandwidth	§15.247 (a)(2) §2.1049	PASS
Power Spectral Density	§15.247 (e)	PASS
Band Edge	§15.247(d) §2.1051, §2.1057	PASS
Spurious Emission	§15.205/§15.209 §2.1053, §2.1057	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. EUT Description

Product:	Laptop Computer
Model No.:	K15SDA
Trade Mark:	TECNO
Software Version	Windows 11
Hardware Version	N160DBC01_MB_V10 VD
Operation Frequency:	2412MHz~2462MHz (802.11b/g/n/ax(HT20)) 2422MHz~2452MHz (802.11n/ax(HT40))
Channel Separation:	5MHz
Modulation type:	DSSS (DBPSK, DQPSK, CCK) for IEEE 802.11b OFDM(BPSK,QPSK,16QAM,64QAM,256QAM) for IEEE 802.11g/n OFDM/OFDMA(BPSK,QPSK,16QAM,64QAM,256QAM,1024QAM) for IEEE 802.11ax
Antenna Type:	Integral Antenna
Antenna Gain	MAIN:1.42dBi ,AUX:1.96 dBi
EUT Power Rating	Adapter1: E065-1R200325VU Input: 100-240V~50/60Hz 1.5A Output: 20V=3.25A 65.0W Rechargeable Li-ion Polymer Battery: K15S Nominal Voltage: 11.55V Rated Capacity: 6060mAh Rated Energy: 70.00Wh Limited Charge Voltage: 13.2V
Remark:	N/A.

Configuration differences

Configuration	CPU
1	R5-7430U
2	R7-5825U
Note: All models were tested, and the K15SDA (R5-7430U) has the worst test result, which is the main test model reported	

Operation Frequency each of channel For 802.11b/g/n/ax(HT20)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Operation Frequency each of channel For 802.11n/ax (HT40)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
--	--	4	2427MHz	7	2442MHz	--	--
--	--	5	2432MHz	8	2447MHz	--	--
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

802.11b/g/n/ax (HT20)

Channel	Frequency
The lowest channel	2412MHz
The middle channel	2437MHz
The Highest channel	2462MHz

802.11n/ax (HT40)

Channel	Frequency
The lowest channel	2422MHz
The middle channel	2437MHz
The Highest channel	2452MHz

4. Genera Information

4.1. Test environment and mode

Operating Environment:

Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar

Test Mode:

Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 98.46%)
-------------------	--

The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. For the full battery state and The output power to the maximum state.

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode
802.11b
802.11g
802.11n/ax(H20)
802.11n/ax(H40)

Final Test Mode:

Operation mode:	Keep the EUT in continuous transmitting with modulation
-----------------	---

1. For WIFI function, the engineering test program was provided and enabled to make EUT continuous transmit/receive. 2. According to ANSI C63.10 standards, the test results are both the "worst case" and "worst setup" 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n(H20). Duty cycle setting during the transmission is 98.5% with maximum power setting for all modulations.

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Adapter	E065-1R200325VU		/	TECNO

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

5. Facilities and Accreditations

5.1. Facilities

All measurement facilities used to collect the measurement data are located at **World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. Building A-B, Baoli'an Industrial Park, No.58 and 60, Tangtou Avenue, Shiyao Street, Bao'an District, Shenzhen City, Guangdong Province, China**

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 32. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:2017.

USA	ANAB - Certificate Number: AT-3951
China	CNAS (Registration Number: L3732)
Canada	ISED(CAB identifier:CN0178)

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.wsct-cert.com>

5.3.Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission Test	$\pm 3.2\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1GHz)	$\pm 4.7\text{dB}$
5	All emissions, radiated(>1GHz)	$\pm 4.7\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2.0\%$

5.4.MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Calibration Date	Calibration Due.
Test software	--	EZ-EMC	CON-03A	-	-
Test software	--	MTS8310	-	-	-
EMI Test Receiver	R&S	ESCI	100005	2024-11-05	2025-11-04
LISN	AFJ	LS16	16010222119	2024-11-05	2025-11-04
LISN(EUT)	Mestec	AN3016	04/10040	2024-11-05	2025-11-04
Universal Radio Communication Tester	R&S	CMU 200	1100.0008.02	2024-11-05	2025-11-04
Coaxial cable	Megalon	LMR400	N/A	2024-11-05	2025-11-04
GPIO cable	Megalon	GPIO	N/A	2024-11-05	2025-11-04
Spectrum Analyzer	R&S	FSU	100114	2024-11-05	2025-11-04
Pre Amplifier	H.P.	HP8447E	2945A02715	2024-11-05	2025-11-04
Pre-Amplifier	CDSI	PAP-1G18-38	--	2024-11-05	2025-11-04
Bi-log Antenna	SCHWARZBECK	VULB9168	01488	2025-07-29	2026-07-28
9*6*6 Anechoic	--	--	--	2024-11-05	2025-11-04
Horn Antenna	COMPLIANCE ENGINEERING	CE18000	--	2024-11-05	2025-11-04
Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-631	2024-11-05	2025-11-04
Cable	TIME MICROWAVE	LMR-400	N-TYPE04	2024-11-05	2025-11-04
System-Controller	CCS	N/A	N/A	N.C.R	N.C.R
Turn Table	CCS	N/A	N/A	N.C.R	N.C.R
Antenna Tower	CCS	N/A	N/A	N.C.R	N.C.R
RF cable	Murata	MXHQ87WA3000	-	2024-11-05	2025-11-04
Loop Antenna	EMCO	6502	00042960	2024-11-05	2025-11-04
Horn Antenna	SCHWARZBECK	BBHA 9170	1123	2024-11-05	2025-11-04
Power meter	Anritsu	ML2487A	6K00003613	2024-11-05	2025-11-04
Power sensor	Anritsu	MX248XD	--	2024-11-05	2025-11-04
Spectrum Analyzer	Keysight	N9010B	MY60241089	2024-11-05	2025-11-04

6. Test Results and Measurement Data

6.1. Antenna requirement

Standard requirement:

FCC Part15 C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

E.U.T Antenna:

The Wi-Fi antenna is a Integral Antenna. it meets the standards, and the best case gain of the antenna is "MAIN:1.42dBi (ANT1),AUX:1.96dBi (ANT2)".

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(N_{ANT}/N_{SS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with

G_{ANT} set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

- (i) If all antennas have the same gain, G_{ANT} , Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices,
 $\text{Array Gain} = 10 \log(N_{ANT}/N_{SS})$ dB.

- For power measurements on IEEE 802.11 devices,^{1,2}
 $Array\ Gain = 0\ dB$ (i.e., no array gain) for $N_{ANT} \leq 4$;
 $Array\ Gain = 0\ dB$ (i.e., no array gain) for channel widths $\geq 40\ MHz$ for any N_{ANT} ;
 $Array\ Gain = 5\ log(N_{ANT}/N_{SS})\ dB$ or $3\ dB$, whichever is less, for 20-MHz channel widths with $N_{ANT} \geq 5$.
- For power measurements on all other devices:
 $Array\ Gain = 10\ log(N_{ANT}/N_{SS})\ dB$. The FCC may permit a lower array gain value based on analysis involving the specific cyclic delays, signal bandwidths, channelization, and antenna configurations used by the device. Contact the FCC through the Knowledge DataBase (www.fcc.gov/labhelp) for more information.

(ii) If antenna gains are not equal, the user may use either of the following methods to calculate directional gain, provided that each transmit antenna is driven by only one spatial stream:

- Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain; or,

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

The directional gain “DG” is calculated as following table.

<CDD Modes>	Ant1 (dBi)	Ant2 (dBi)	DG for power (dBi)	DG for PSD (dBi)
2412~2462MHz	1.42	1.96	1.96	4.70

Power limit reduction = Composite gain – 6dBi, (min = 0)

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, (min = 0)

6.2. Conducted Emission

6.2.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	Reference Plane Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m														
Test Mode:	Charging + transmitting with modulation														
Test Procedure:	1. The E.U.T is connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.														
Test Result:	PASS														


6.2.2. EUT OPERATING CONDITIONS

The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.


Test data

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

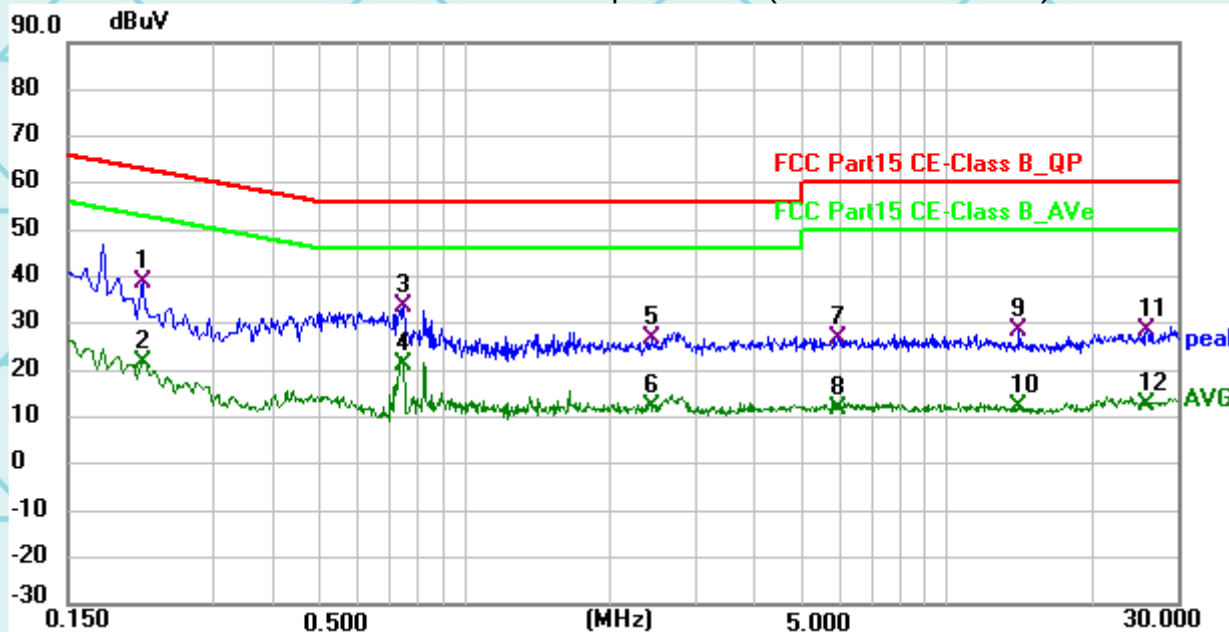

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2130	18.11	20.68	38.79	63.09	-24.30	QP
2	0.2130	0.90	20.68	21.58	53.09	-31.51	AVG
3 *	0.7440	12.99	20.56	33.55	56.00	-22.45	QP
4	0.7440	0.47	20.56	21.03	46.00	-24.97	AVG
5	2.4405	6.08	20.60	26.68	56.00	-29.32	QP
6	2.4405	-8.42	20.60	12.18	46.00	-33.82	AVG
7	5.9595	6.41	20.54	26.95	60.00	-33.05	QP
8	5.9595	-8.80	20.54	11.74	50.00	-38.26	AVG
9	14.1000	8.15	20.22	28.37	60.00	-31.63	QP
10	14.1000	-8.09	20.22	12.13	50.00	-37.87	AVG
11	25.9980	7.78	20.71	28.49	60.00	-31.51	QP
12	25.9980	-8.22	20.71	12.49	50.00	-37.51	AVG

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

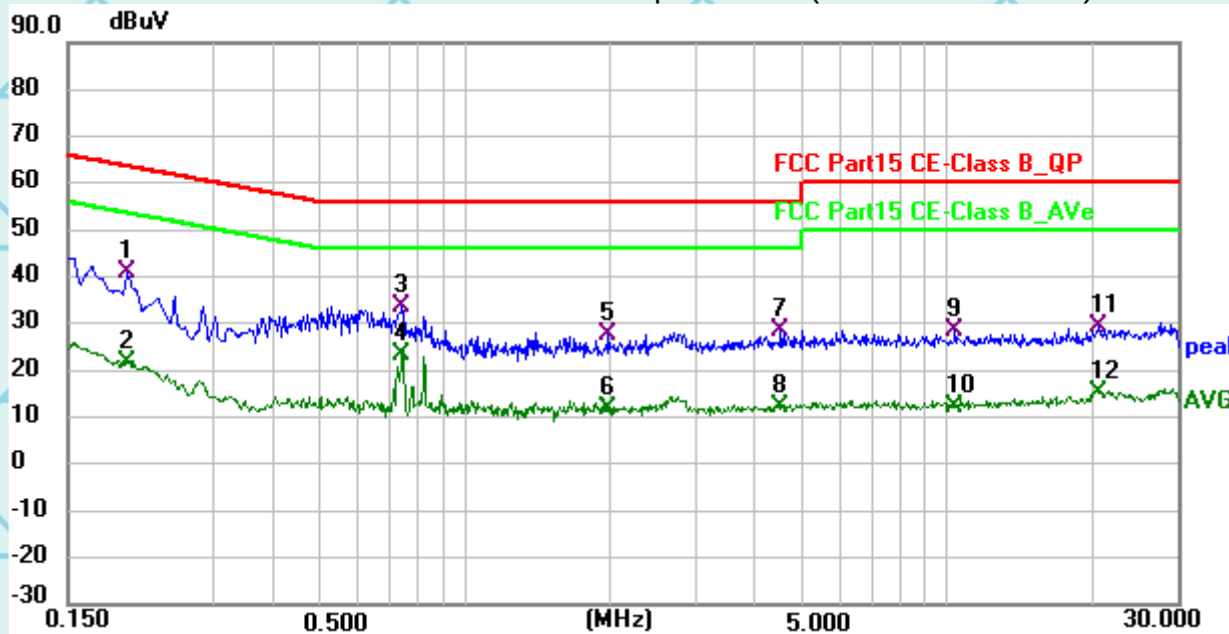

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1995	20.04	20.69	40.73	63.63	-22.90	QP
2	0.1995	0.81	20.69	21.50	53.63	-32.13	AVG
3 *	0.7395	12.99	20.56	33.55	56.00	-22.45	QP
4	0.7395	2.95	20.56	23.51	46.00	-22.49	AVG
5	1.9815	6.96	20.61	27.57	56.00	-28.43	QP
6	1.9815	-9.03	20.61	11.58	46.00	-34.42	AVG
7	4.5195	7.76	20.58	28.34	56.00	-27.66	QP
8	4.5195	-8.39	20.58	12.19	46.00	-33.81	AVG
9	10.3470	8.02	20.43	28.45	60.00	-31.55	QP
10	10.3470	-8.24	20.43	12.19	50.00	-37.81	AVG
11	20.6250	9.25	20.30	29.55	60.00	-30.45	QP
12	20.6250	-5.14	20.30	15.16	50.00	-34.84	AVG

Note1:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)


Limit (dBμV) = Limit stated in standard

Margin (dB) = Measurement (dBμV) – Limits (dBμV)

Q.P. =Quasi-Peak AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

6.3. Conducted Peak Output Power

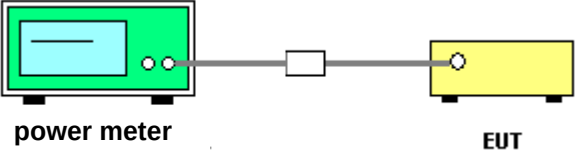Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	KDB 558074
Limit:	30dBm
Test Setup:	 The diagram illustrates the test setup. On the left is a green box labeled 'power meter'. A line connects it to a small white box labeled 'attenuator'. Another line connects the attenuator to a yellow box labeled 'EUT' (Equipment Under Test).
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04. 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Measure the conducted output power and record the results in the test report.

Test Data

MAIN Ant1

Mode	Frequency (MHz)	Total Power (dBm)	Limit (dBm)	Verdict
b	2412	22.36	30	Pass
b	2437	22.44	30	Pass
b	2462	22.52	30	Pass
g	2412	24.85	30	Pass
g	2437	25.62	30	Pass
g	2462	25.51	30	Pass
n20	2412	23.87	30	Pass
n20	2437	24.37	30	Pass
n20	2462	24.47	30	Pass
n40	2422	24.50	30	Pass
n40	2437	24.45	30	Pass
n40	2452	24.70	30	Pass
ax20	2412	24.07	30	Pass
ax20	2437	24.35	30	Pass
ax20	2462	24.51	30	Pass
ax40	2422	24.69	30	Pass
ax40	2437	24.80	30	Pass
ax40	2452	24.80	30	Pass

AUX Ant2

Mode	Frequency (MHz)	Total Power (dBm)	Limit (dBm)	Verdict
b	2412	22.06	30	Pass
b	2437	22.08	30	Pass
b	2462	22.22	30	Pass
g	2412	22.29	30	Pass
g	2437	22.56	30	Pass
g	2462	22.72	30	Pass
n20	2412	21.47	30	Pass
n20	2437	21.80	30	Pass
n20	2462	22.07	30	Pass
n40	2422	21.00	30	Pass
n40	2437	20.98	30	Pass
n40	2452	21.04	30	Pass
ax20	2412	23.26	30	Pass
ax20	2437	23.37	30	Pass
ax20	2462	23.57	30	Pass
ax40	2422	23.63	30	Pass
ax40	2437	23.82	30	Pass
ax40	2452	23.84	30	Pass

Report No.: WSCT-ANAB-R&E250700057A -Wi-Fi1
MiMO Mode


Issued Date: 14 August 2025

Revised: None

Mode	Frequency (MHz)	Total Power (dBm)	Limit (dBm)	Verdict
n20	2412	25.84	30	Pass
n20	2437	26.28	30	Pass
n20	2462	26.44	30	Pass
n40	2422	26.10	30	Pass
n40	2437	26.06	30	Pass
n40	2452	26.25	30	Pass
ax20	2412	26.69	30	Pass
ax20	2437	26.90	30	Pass
ax20	2462	27.08	30	Pass
ax40	2422	27.20	30	Pass
ax40	2437	27.35	30	Pass
ax40	2452	27.36	30	Pass

6.4. Emission Bandwidth

6.4.1. Test Specification

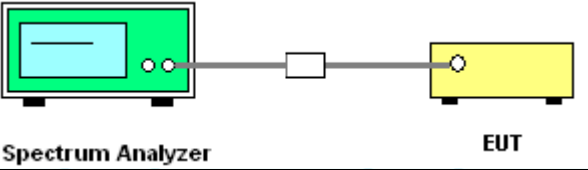
Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	KDB 558074
Limit:	>500kHz
Test Setup:	 The diagram shows a Spectrum Analyzer (represented by a green box with a screen and two knobs) connected via a cable to a small white rectangular block, which is then connected to a yellow rectangular box labeled 'EUT'.
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v04. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz. 4. Measure and record the results in the test report.
Test Result:	PASS

6.4.2. Test data

Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
b	2412	7.607	0.5	Pass
b	2437	7.558	0.5	Pass
b	2462	7.578	0.5	Pass
g	2412	16.33	0.5	Pass
g	2437	16.30	0.5	Pass
g	2462	16.00	0.5	Pass
n20	2412	16.54	0.5	Pass
n20	2437	17.29	0.5	Pass
n20	2462	16.63	0.5	Pass
n40	2422	34.94	0.5	Pass
n40	2437	35.13	0.5	Pass
n40	2452	35.02	0.5	Pass
ax20	2412	18.19	0.5	Pass
ax20	2437	18.15	0.5	Pass
ax20	2462	18.61	0.5	Pass
ax40	2422	35.81	0.5	Pass
ax40	2437	35.06	0.5	Pass
ax40	2452	36.45	0.5	Pass

Test Graphs


-6dB Bandwidth b 2412MHz

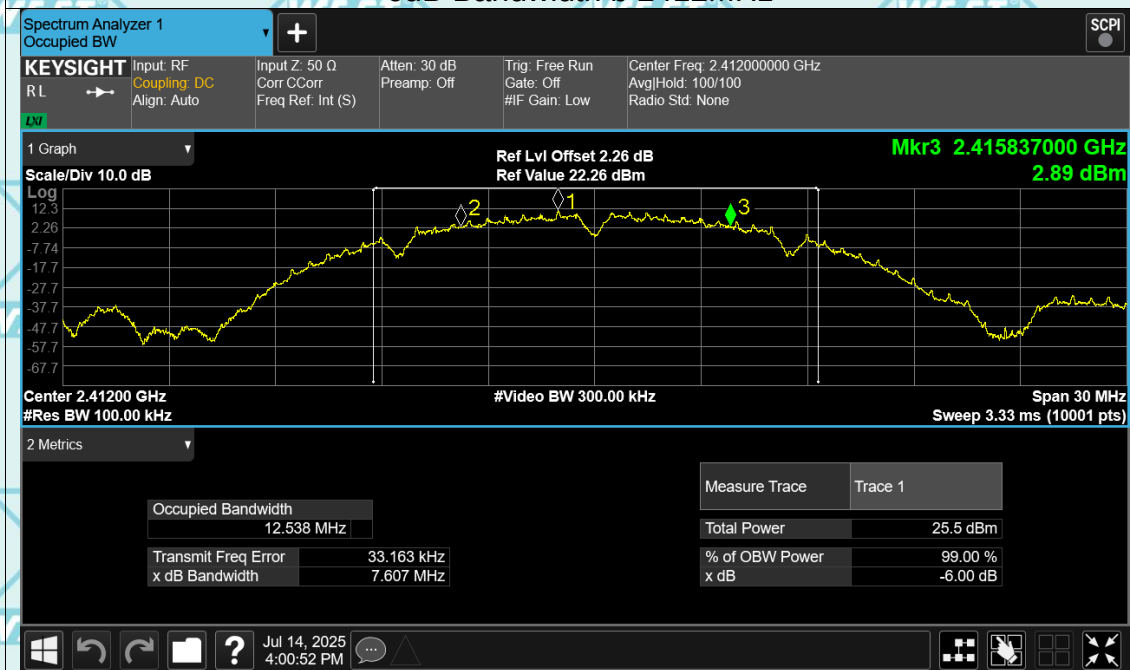


-6dB Bandwidth b 2437MHz




-6dB Bandwidth b 2462MHz

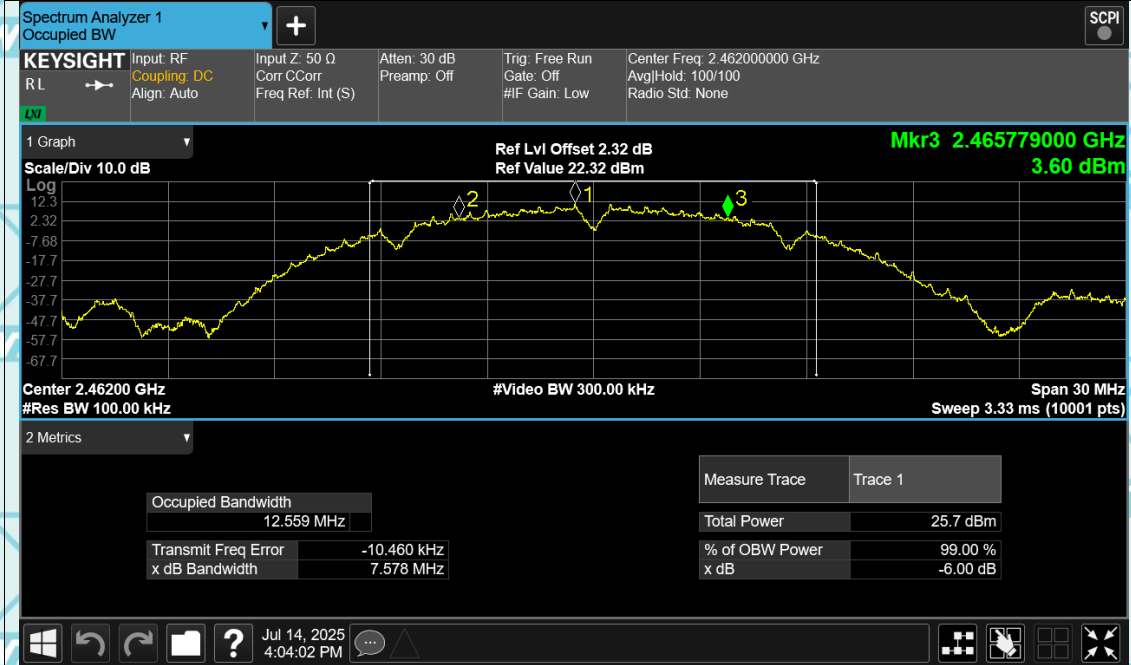


-6dB Bandwidth g 2412MHz

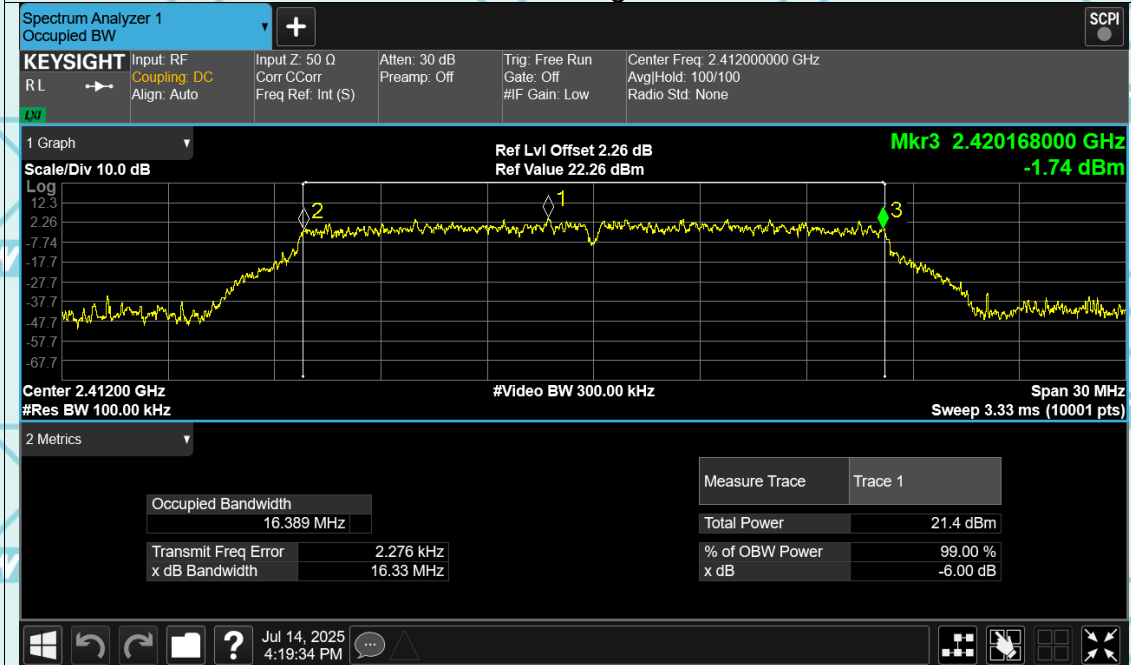


-6dB Bandwidth g 2437MHz

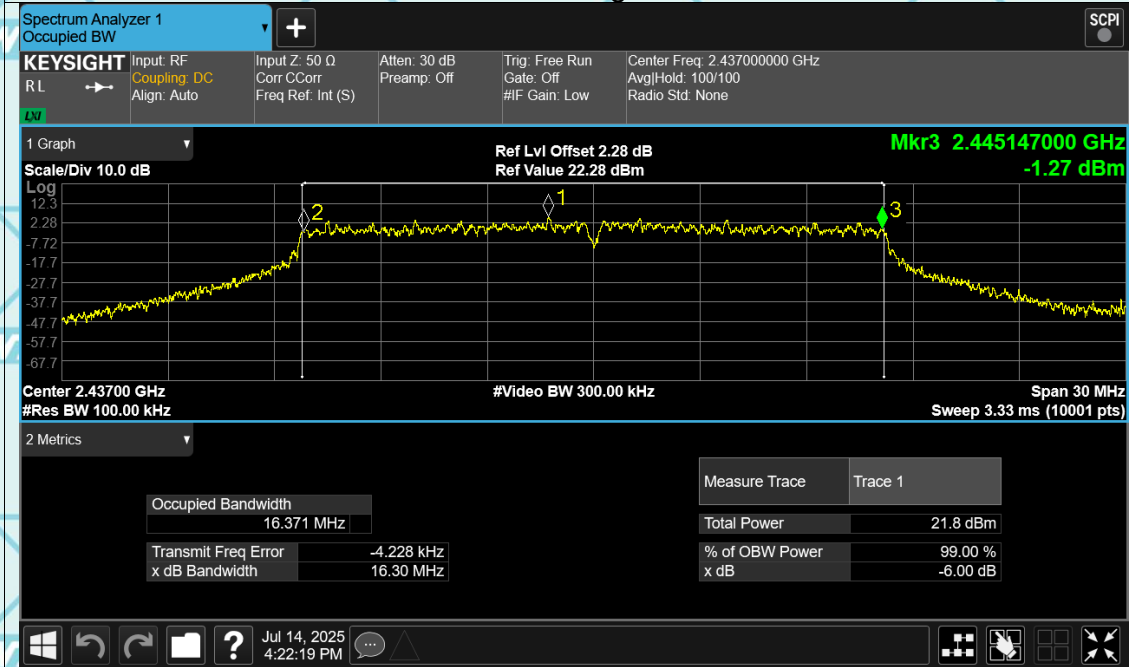


-6dB Bandwidth g 2462MHz

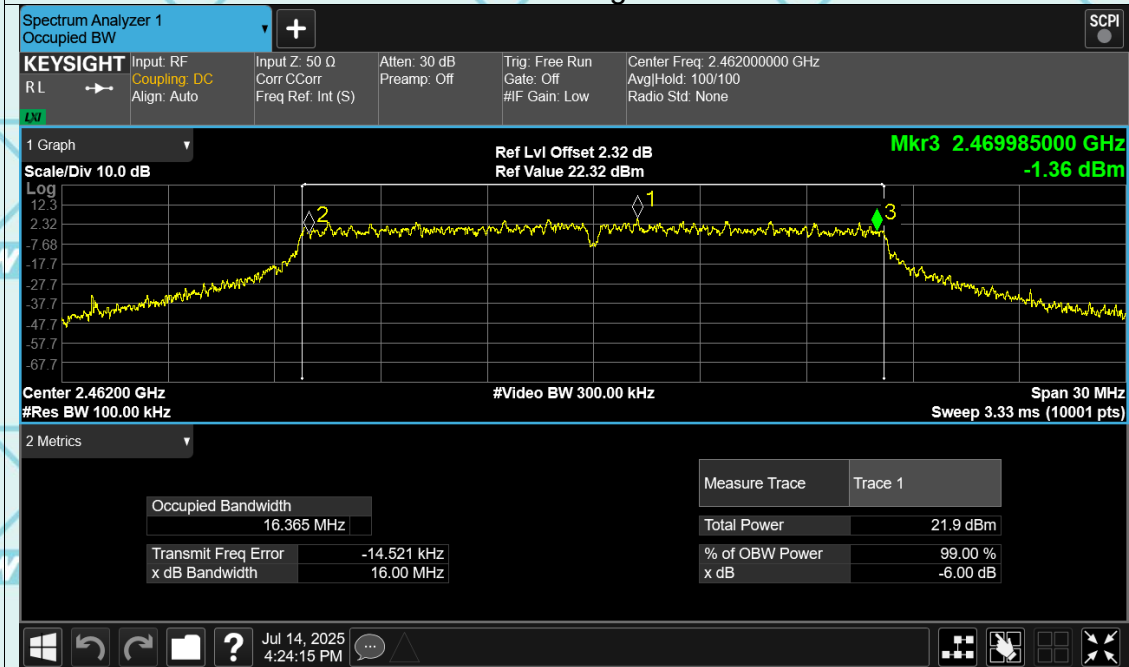


-6dB Bandwidth n20 2412MHz

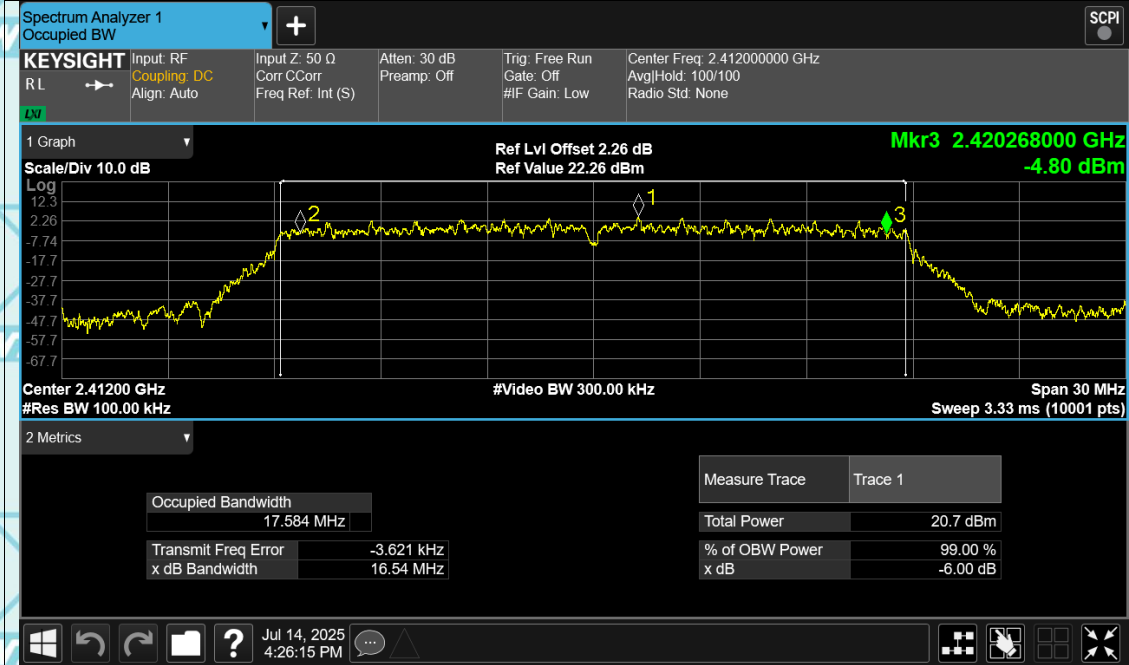


-6dB Bandwidth n20 2437MHz

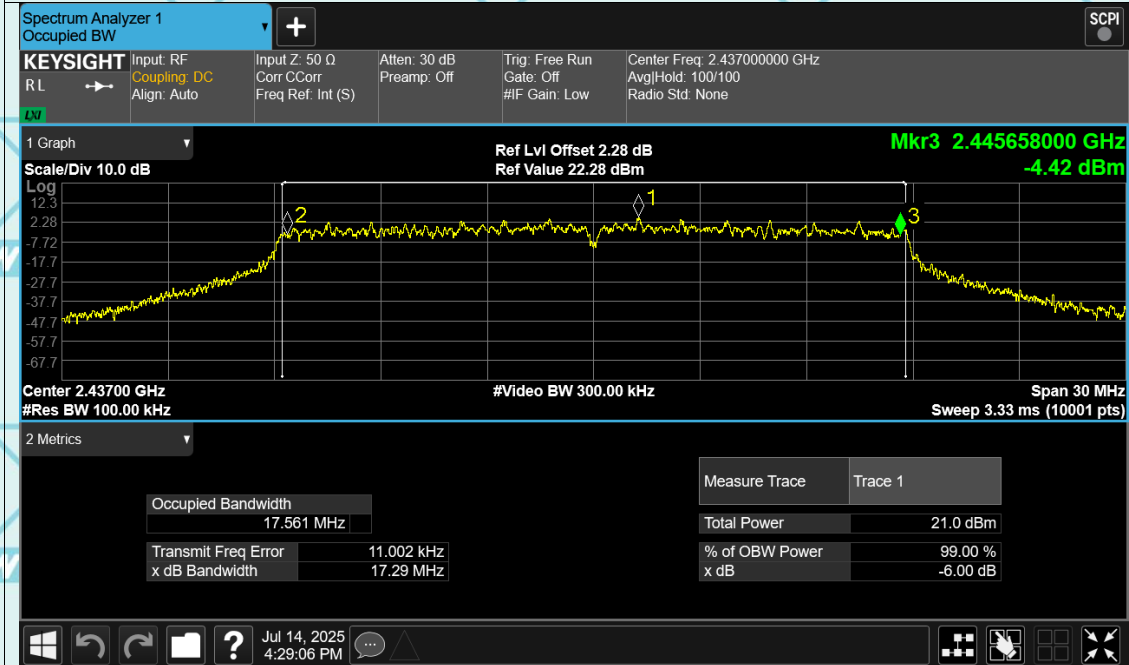


-6dB Bandwidth n20 2462MHz

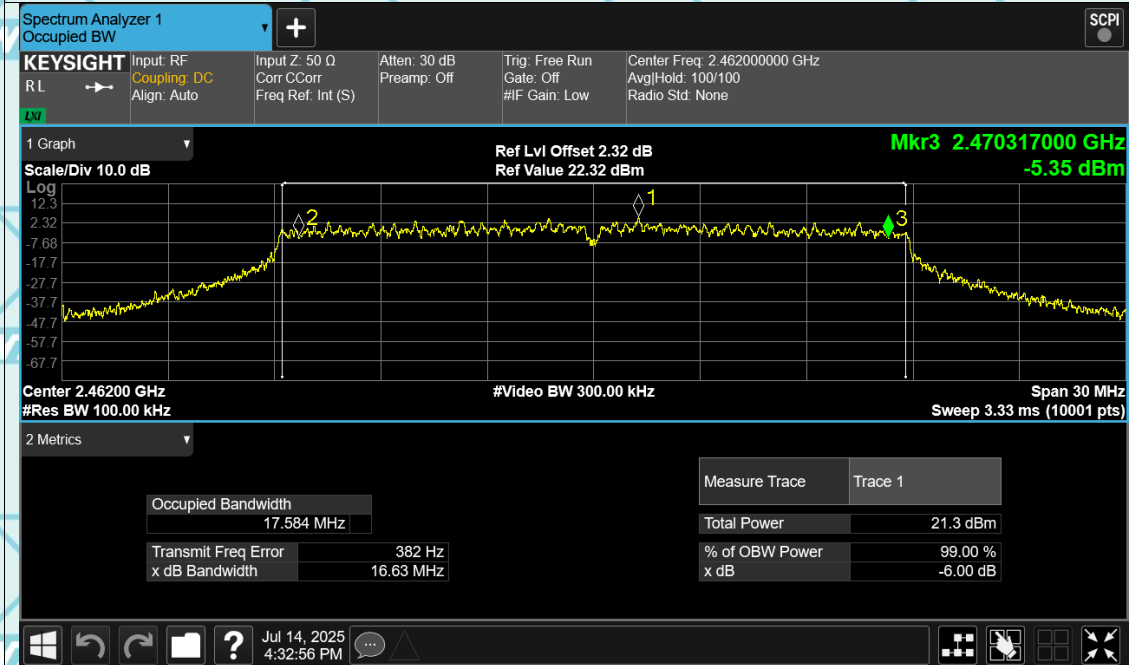


-6dB Bandwidth n40 2422MHz

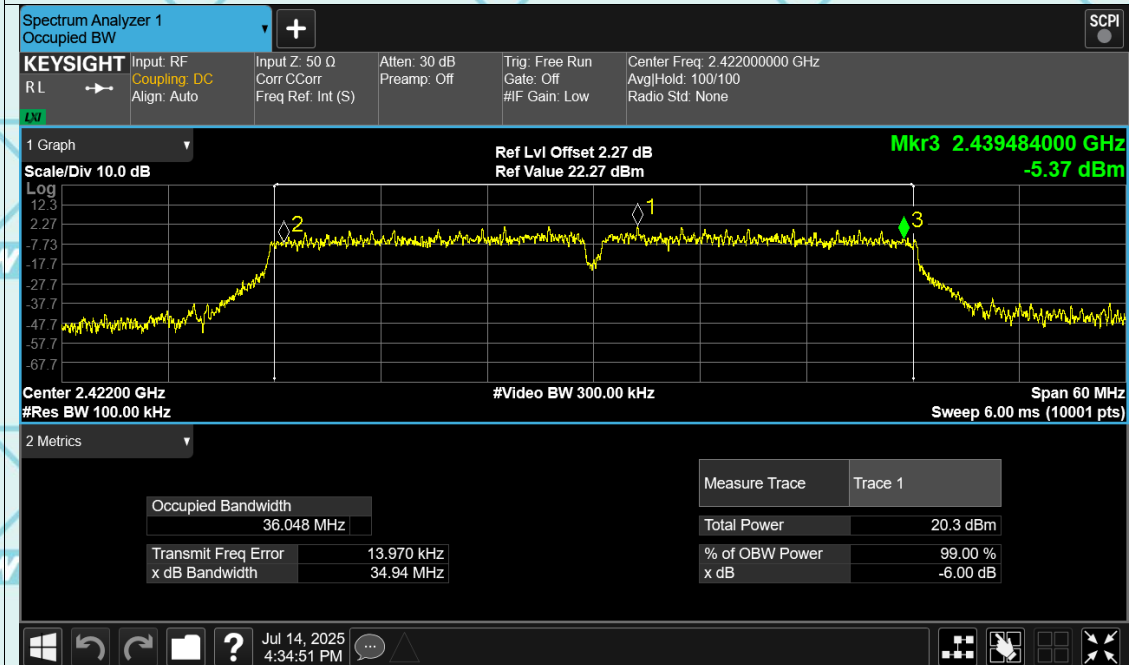


-6dB Bandwidth n40 2437MHz

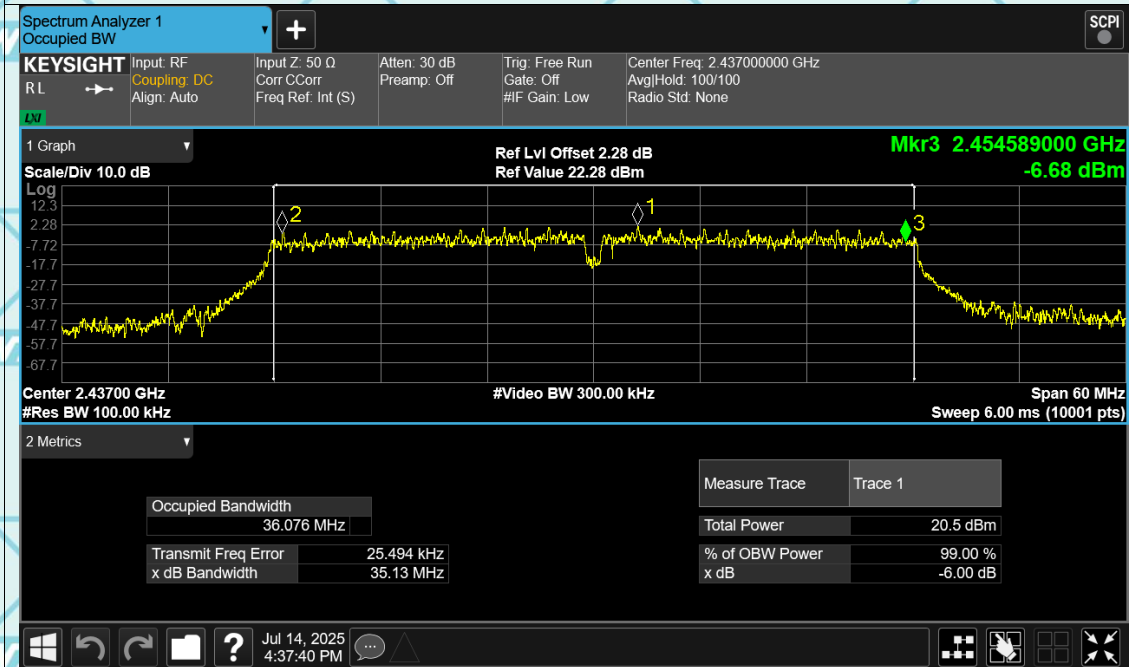


-6dB Bandwidth n40 2452MHz

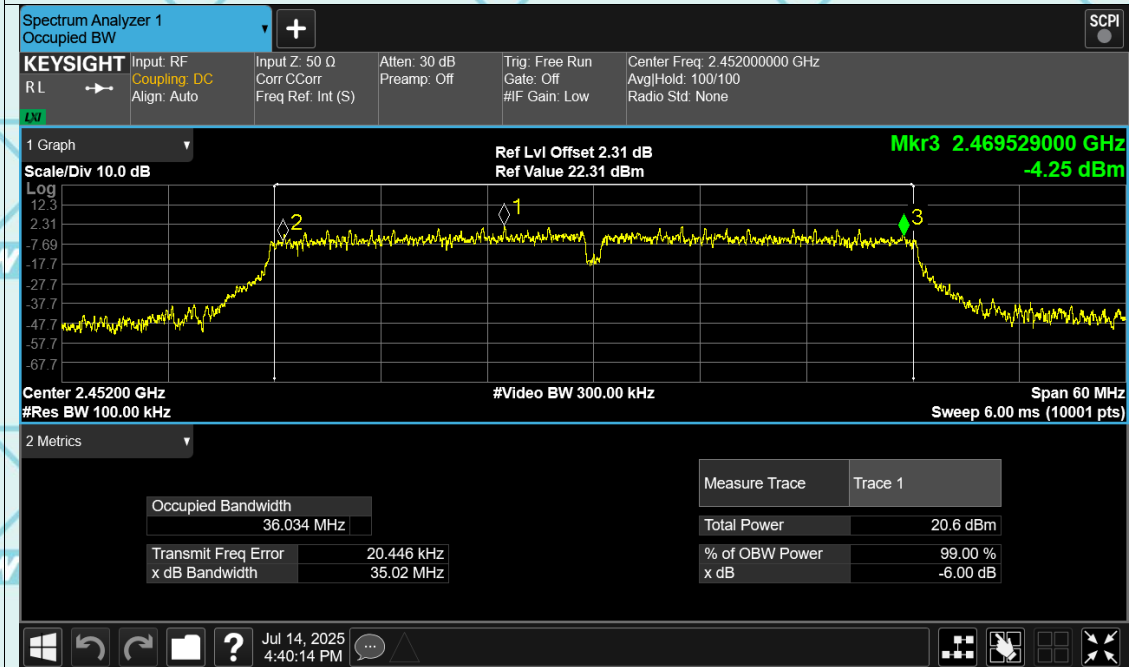


-6dB Bandwidth ax20 2412MHz

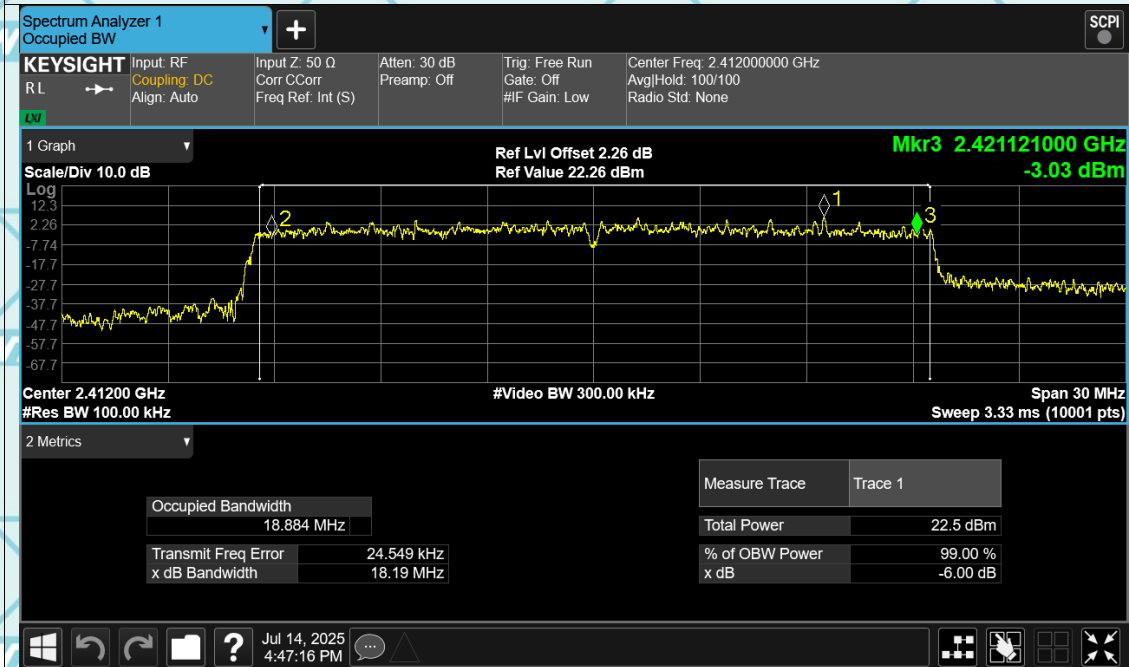


-6dB Bandwidth ax20 2437MHz

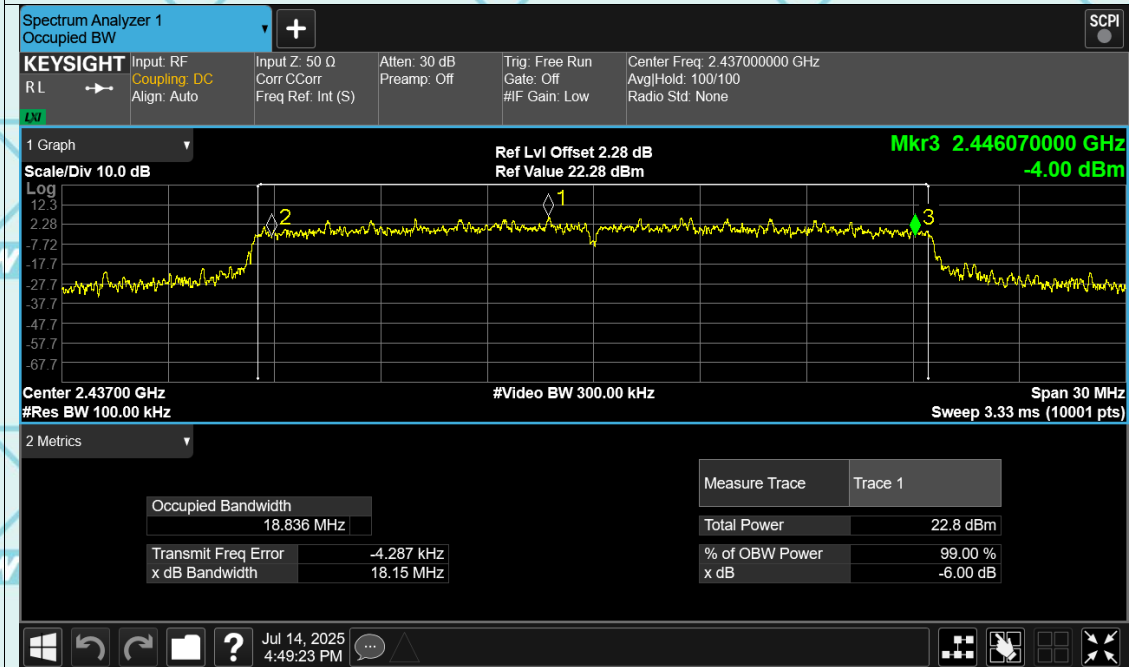


-6dB Bandwidth ax20 2462MHz

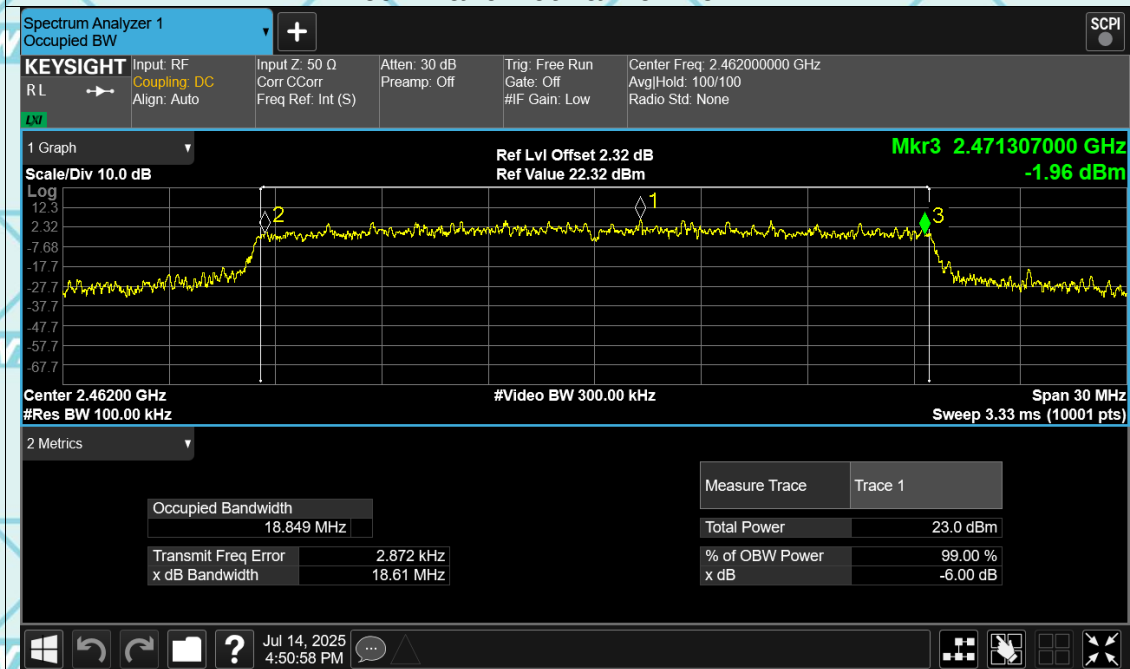


-6dB Bandwidth ax40 2422MHz

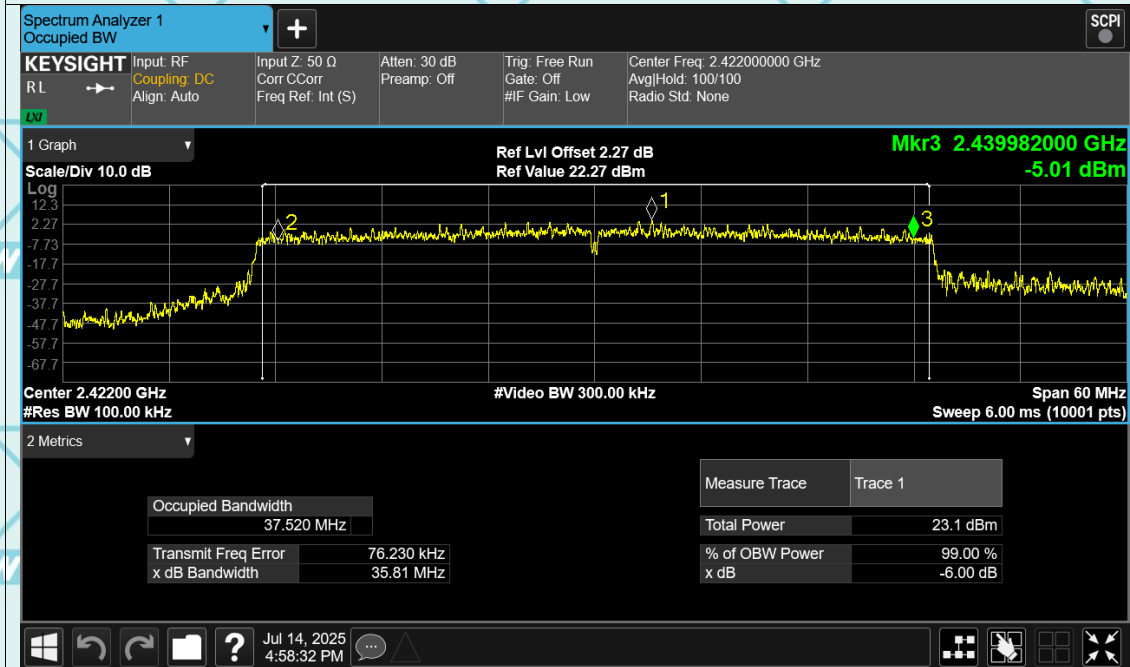

-6dB Bandwidth ax40 2437MHz

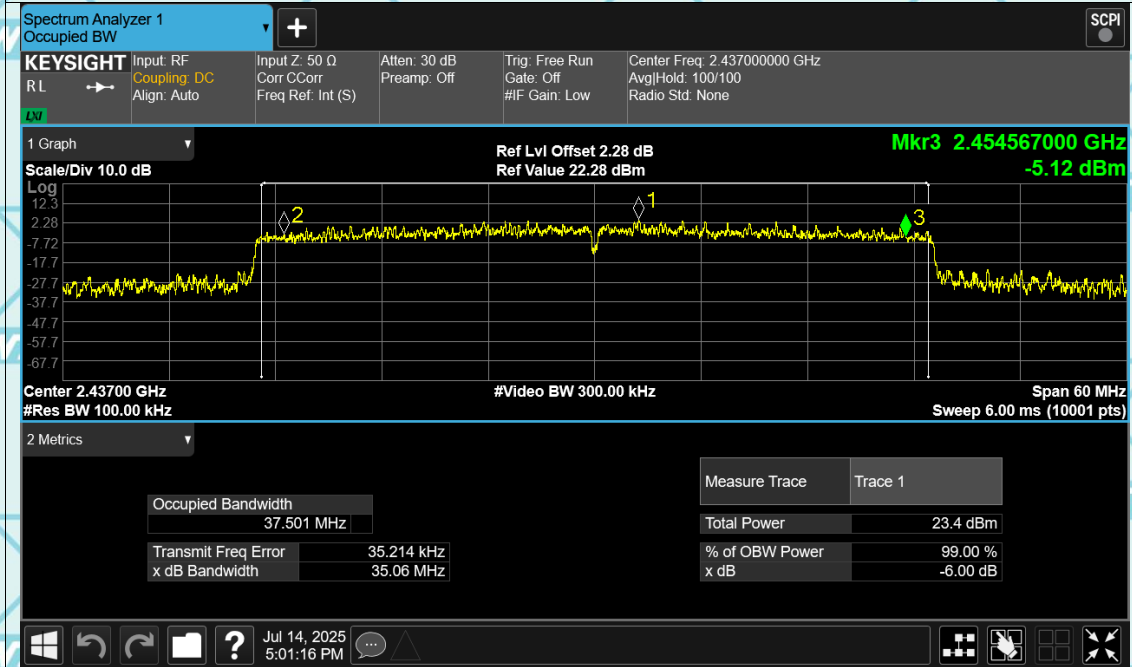


-6dB Bandwidth ax40 2452MHz

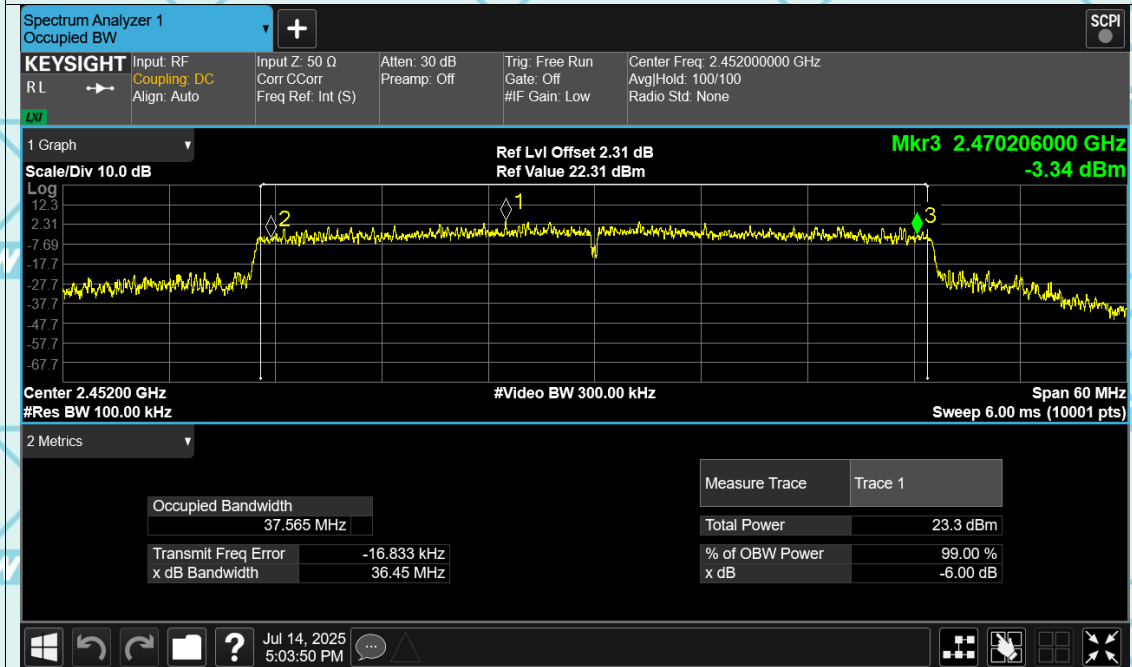

6.5. Power Spectral Density

6.5.1 Test Specification

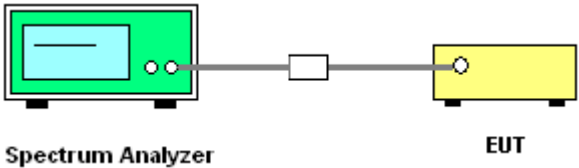Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	KDB 558074
Limit:	The average power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.
Test Setup:	 Spectrum Analyzer EUT
Test Mode:	Transmitting mode with modulation
Test Procedure:	1. The testing follows Measurement Procedure 10.3 Method AVGPSPD of FCC KDB Publication No.558074 D01 DTS Meas. Guidance v04 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW): $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$. Video bandwidth VBW $\geq 3 \times \text{RBW}$. Set the span to at least 1.5 times the OBW. 5. Detector = RMS, Sweep time = auto couple. 6. Employ trace averaging (RMS) mode over a minimum of 100 traces. Use the peak marker function to determine the maximum power level. 6. Measure and record the results in the test report.
Test Result:	PASS

6.5.2. Test data

MAIN Ant1

Mode	Frequency (MHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
b	2412	-2.57	8	Pass
b	2437	-1.62	8	Pass
b	2462	-3.42	8	Pass
g	2412	-6.92	8	Pass
g	2437	-5.72	8	Pass
g	2462	-5.83	8	Pass
n20	2412	-6.92	8	Pass
n20	2437	-7.46	8	Pass
n20	2462	-7.44	8	Pass
n40	2422	-9.52	8	Pass
n40	2437	-9.72	8	Pass
n40	2452	-9.95	8	Pass
ax20	2412	-8.90	8	Pass
ax20	2437	-8.27	8	Pass
ax20	2462	-9.52	8	Pass
ax40	2422	-11.41	8	Pass
ax40	2437	-11.80	8	Pass
ax40	2452	-10.83	8	Pass



AUX Ant2

Mode	Frequency (MHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
b	2412	-2.50	8	Pass
b	2437	-2.91	8	Pass
b	2462	-2.69	8	Pass
g	2412	-6.28	8	Pass
g	2437	-6.46	8	Pass
g	2462	-6.65	8	Pass
n20	2412	-6.11	8	Pass
n20	2437	-7.51	8	Pass
n20	2462	-5.32	8	Pass
n40	2422	-9.60	8	Pass
n40	2437	-9.55	8	Pass
n40	2452	-9.97	8	Pass
ax20	2412	-10.80	8	Pass
ax20	2437	-10.77	8	Pass
ax20	2462	-9.40	8	Pass
ax40	2422	-12.61	8	Pass
ax40	2437	-12.23	8	Pass
ax40	2452	-11.45	8	Pass


MIMO

Mode	Frequency (MHz)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
n20	2412	-3.49	8	Pass
n20	2437	-4.47	8	Pass
n20	2462	-3.24	8	Pass
n40	2422	-6.55	8	Pass
n40	2437	-6.62	8	Pass
n40	2452	-6.95	8	Pass
ax20	2412	-6.74	8	Pass
ax20	2437	-6.33	8	Pass
ax20	2462	-6.45	8	Pass
ax40	2422	-8.96	8	Pass
ax40	2437	-9.00	8	Pass
ax40	2452	-8.12	8	Pass


ANT1

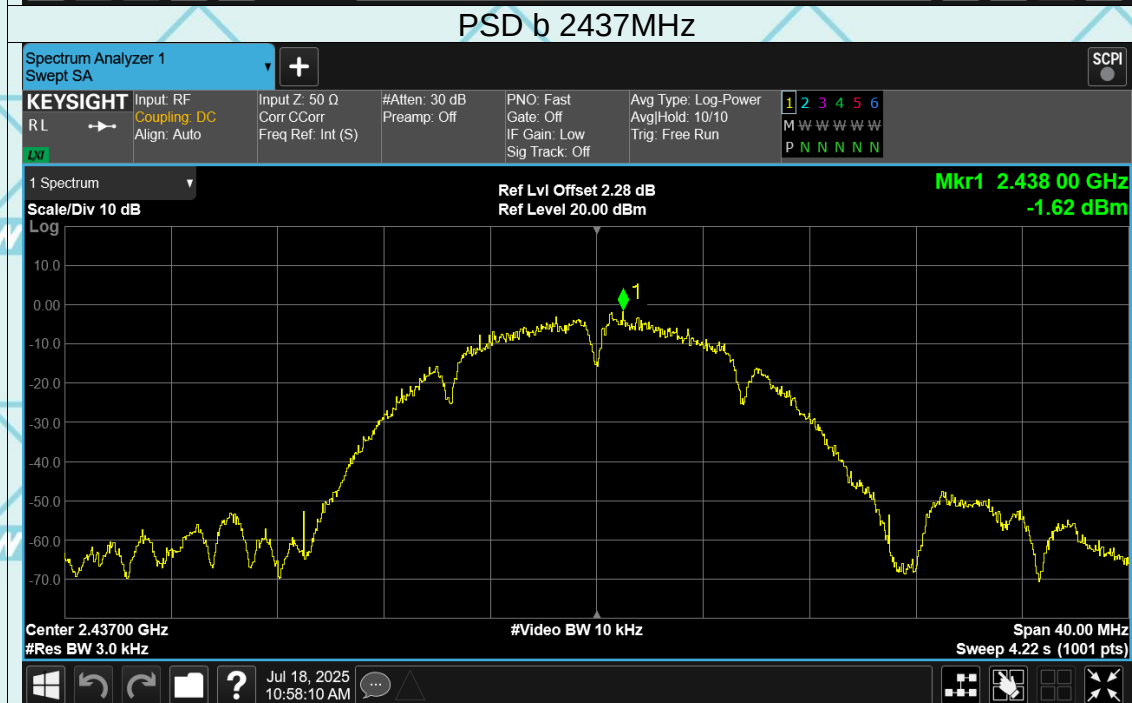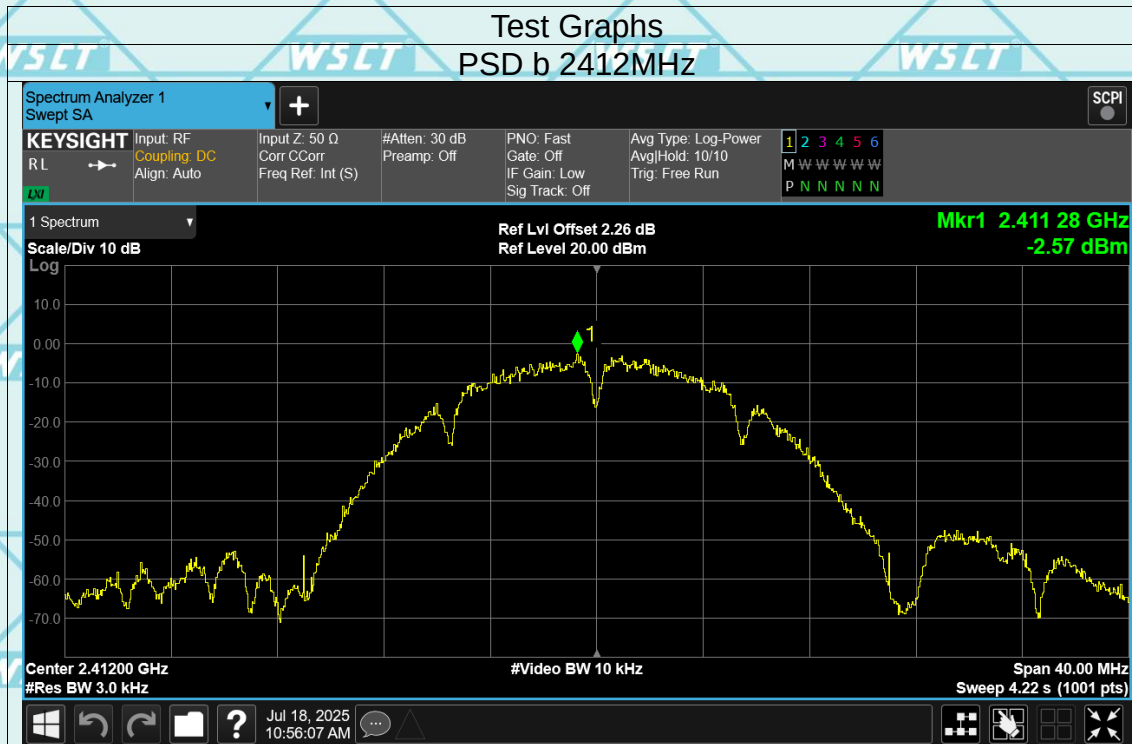


PSD b 2462MHz

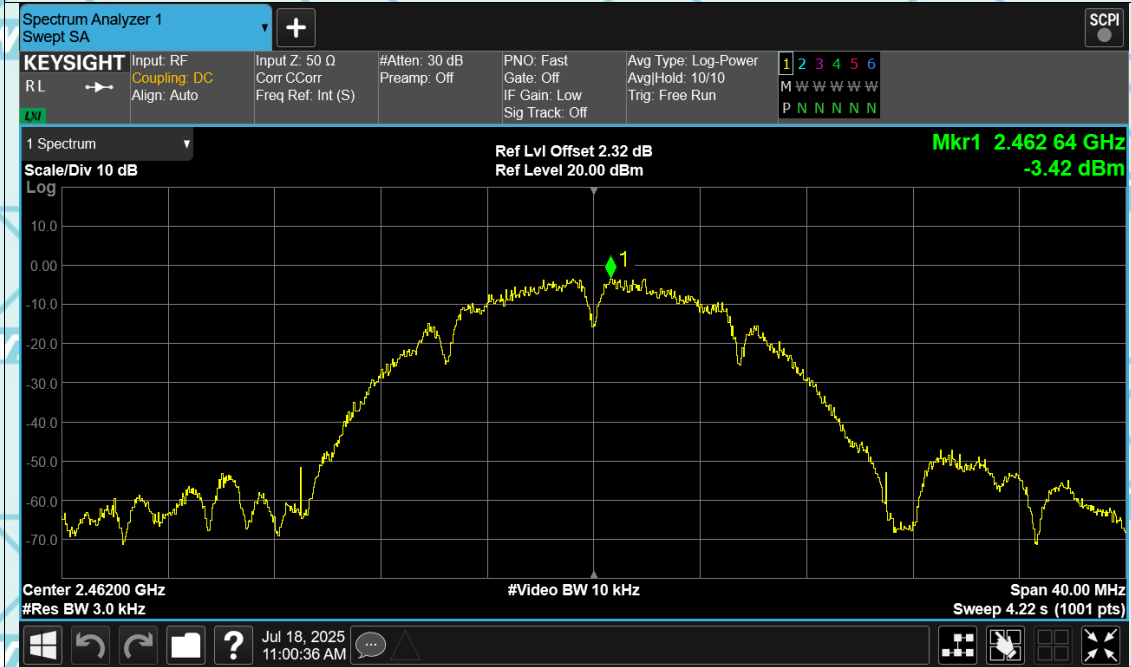


PSD g 2412MHz

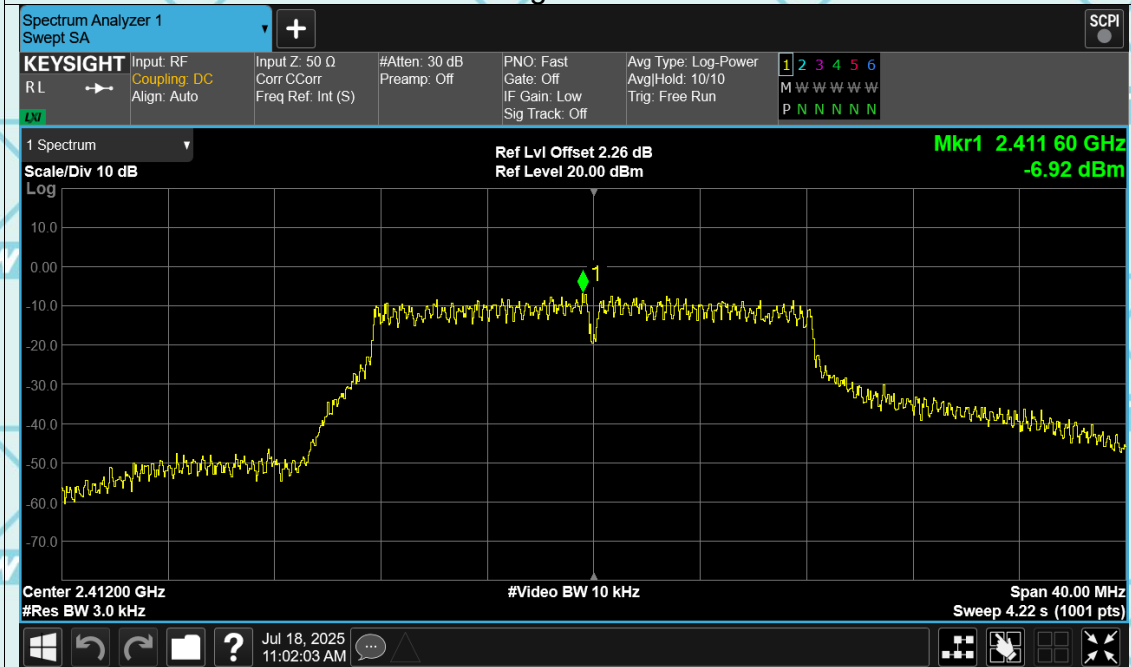


PSD g 2437MHz

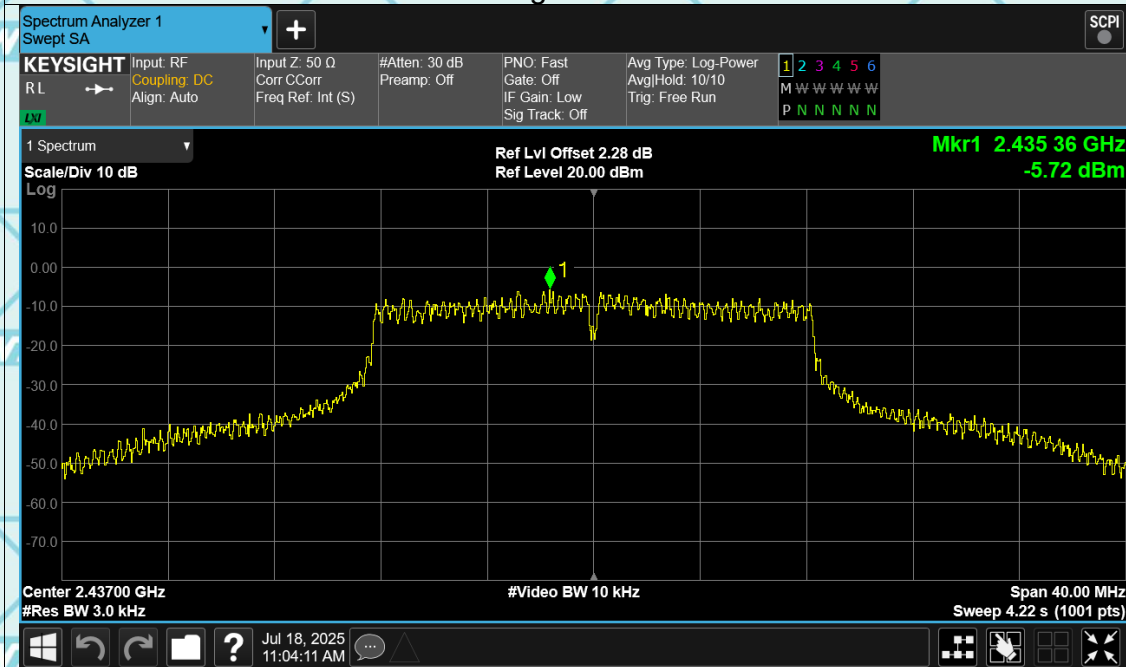


PSD g 2462MHz

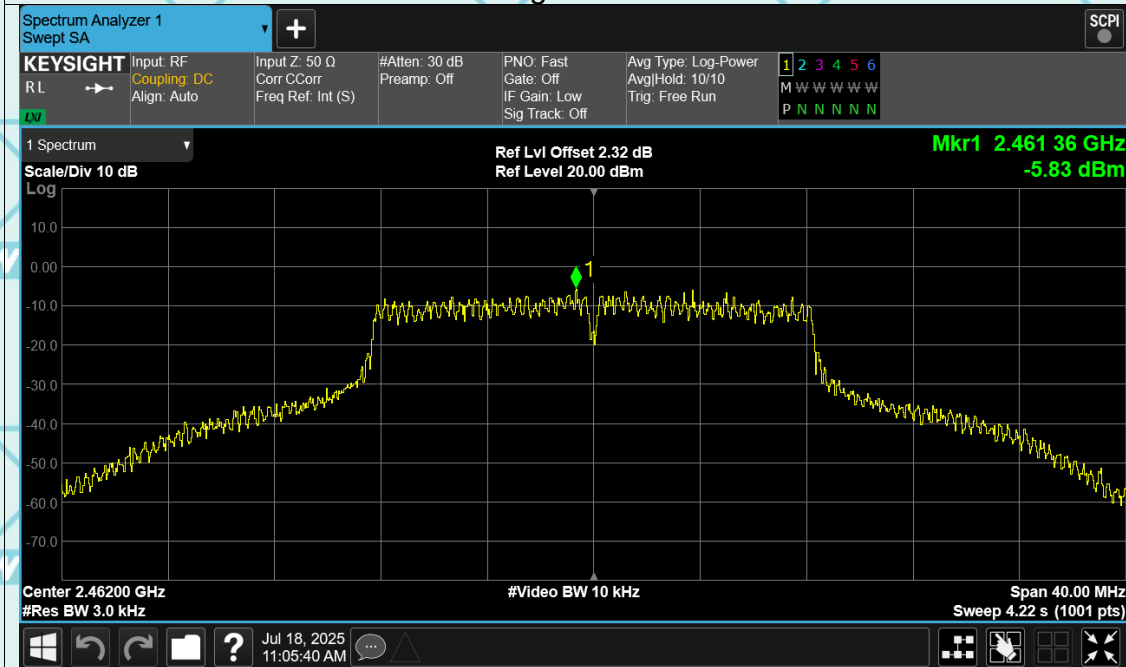


PSD n20 2412MHz

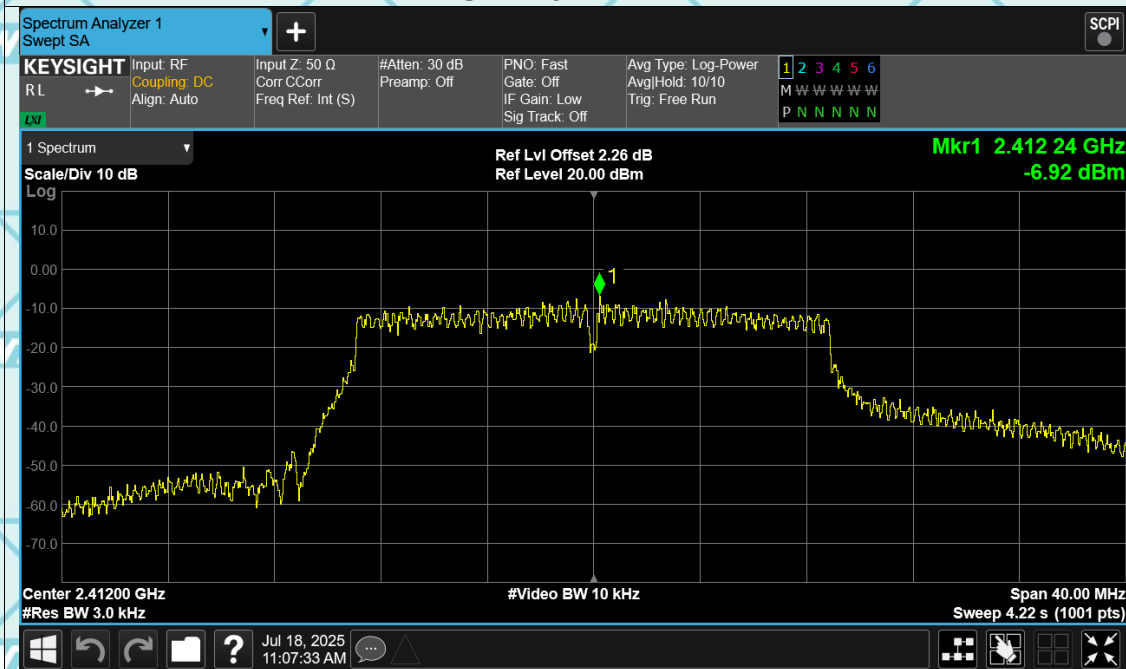


PSD n20 2437MHz

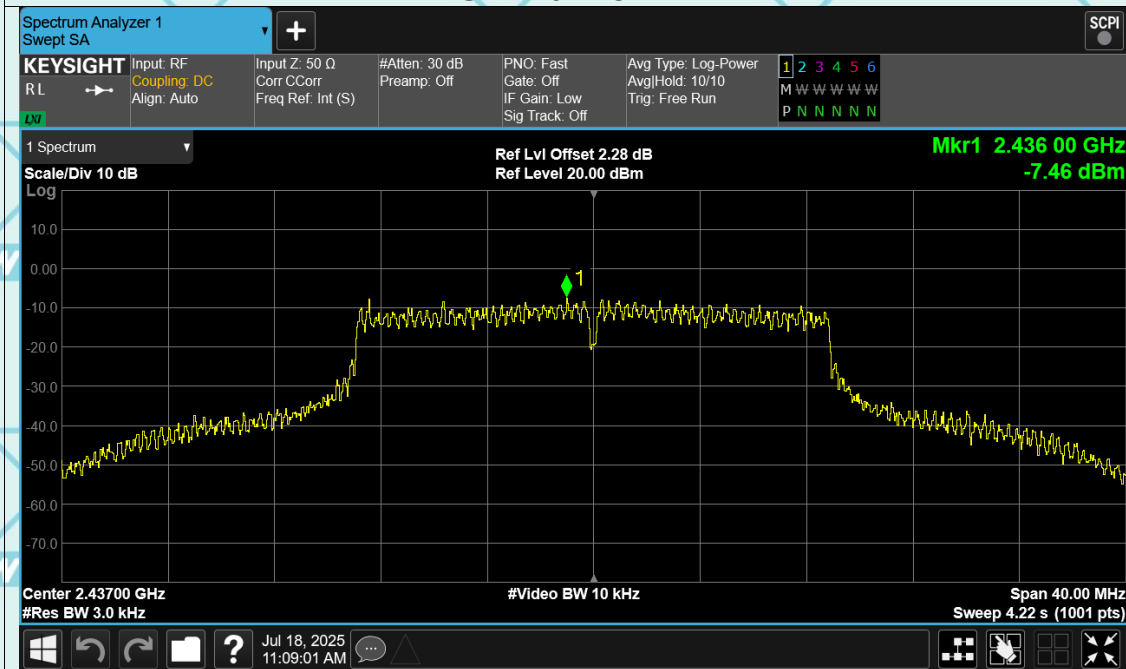


PSD n20 2462MHz

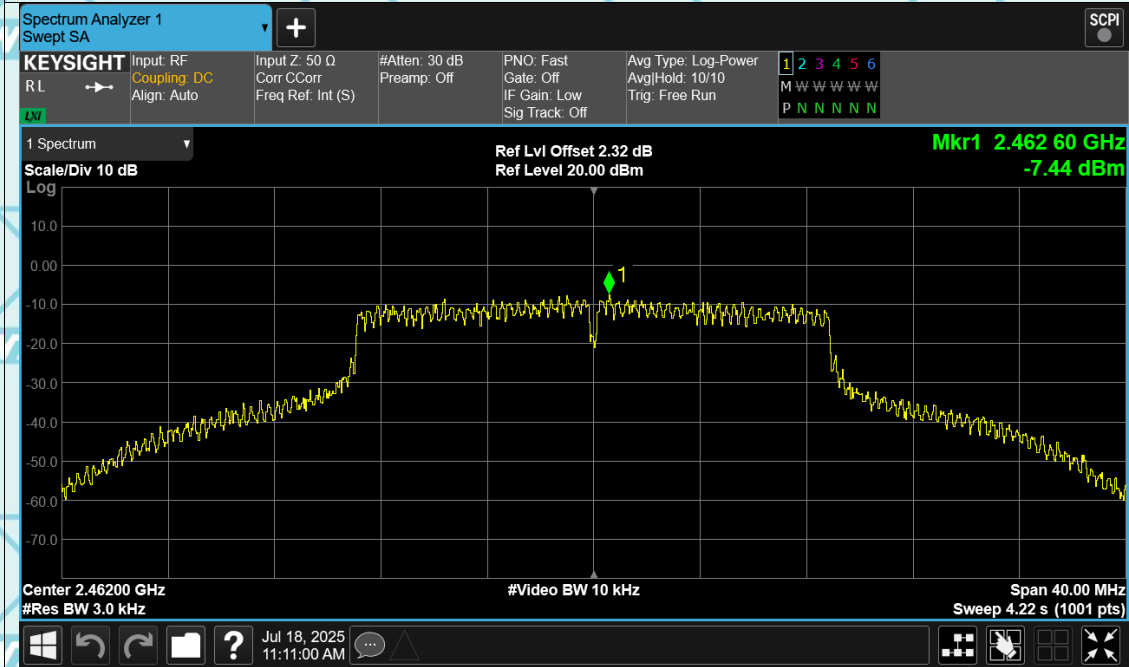


PSD n40 2422MHz

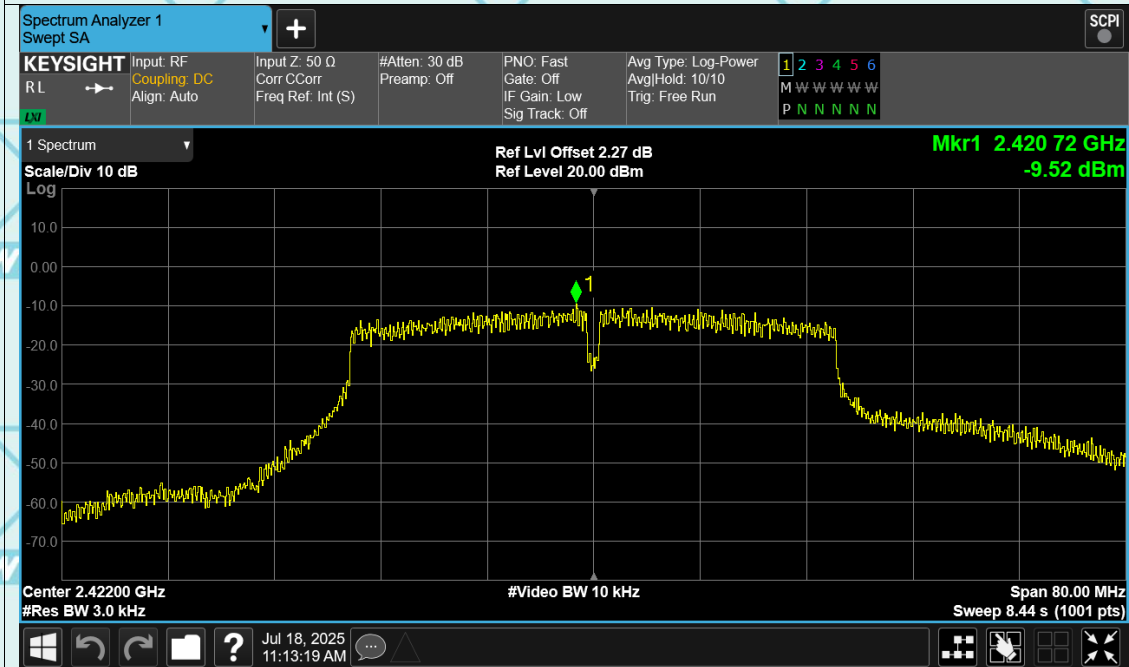


PSD n40 2437MHz

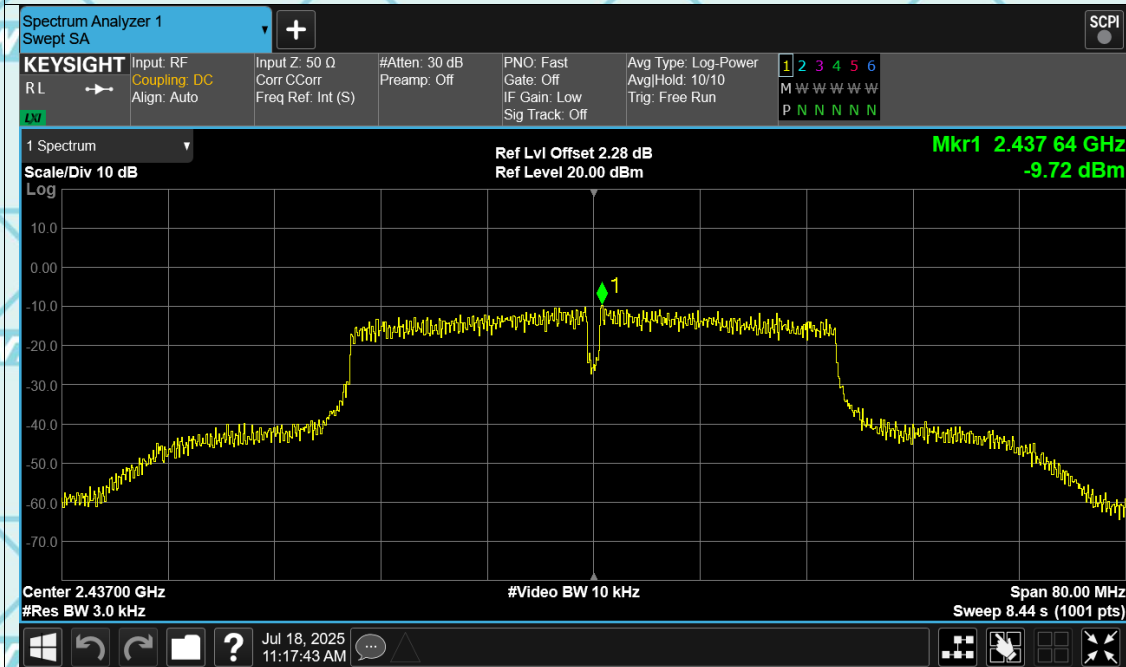


PSD n40 2452MHz

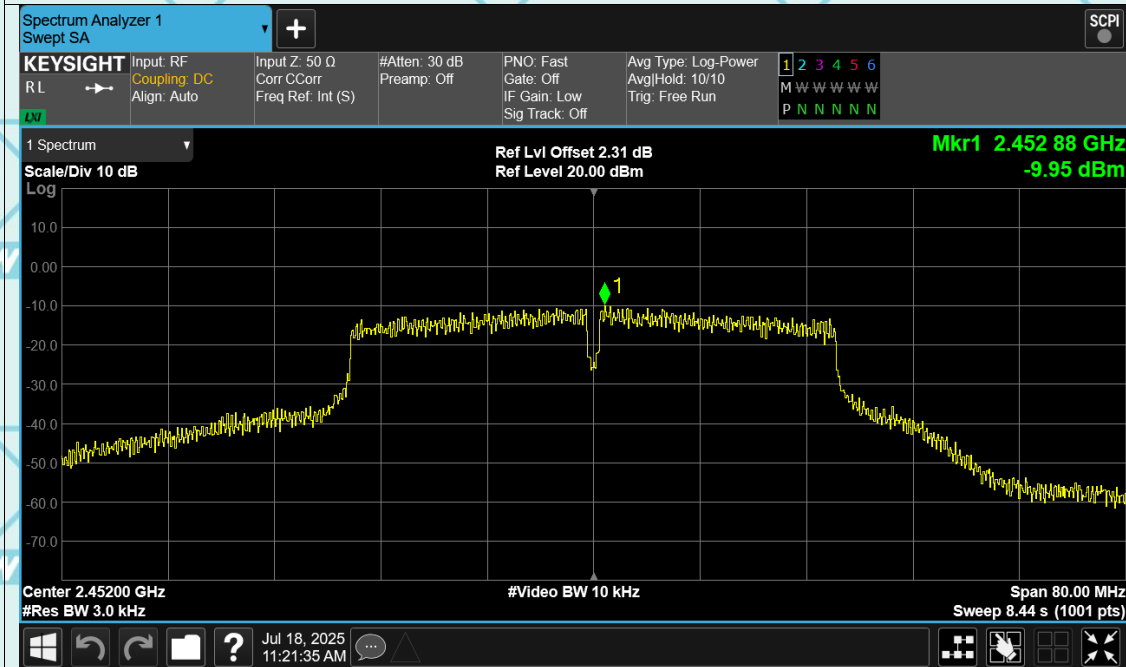


PSD ax20 2412MHz

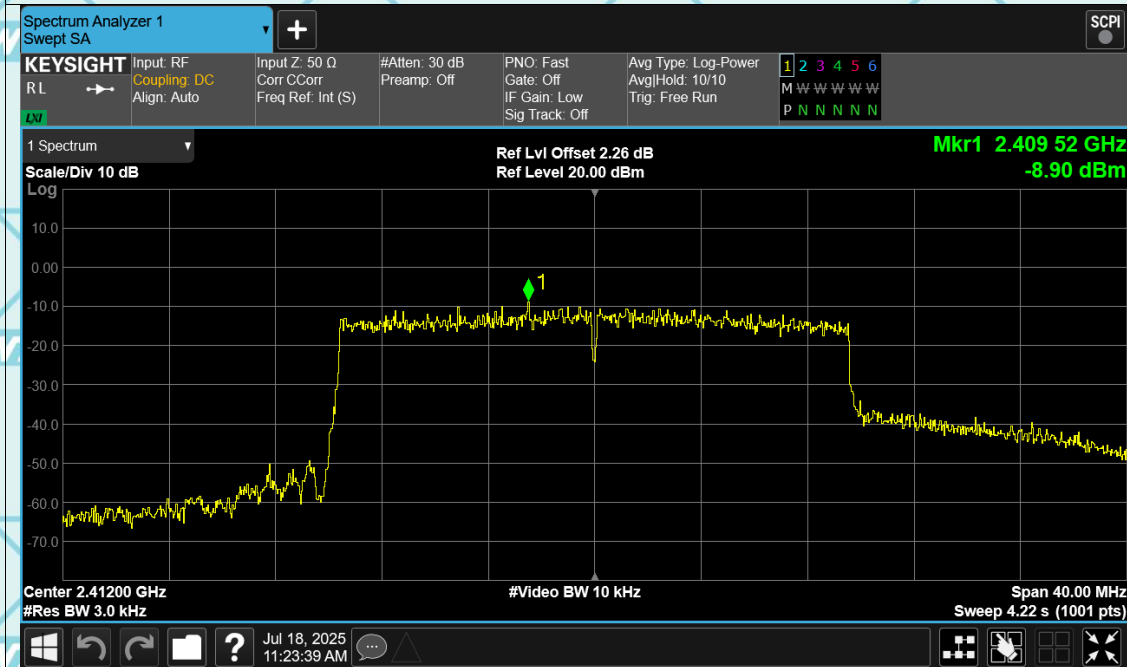


PSD ax20 2437MHz

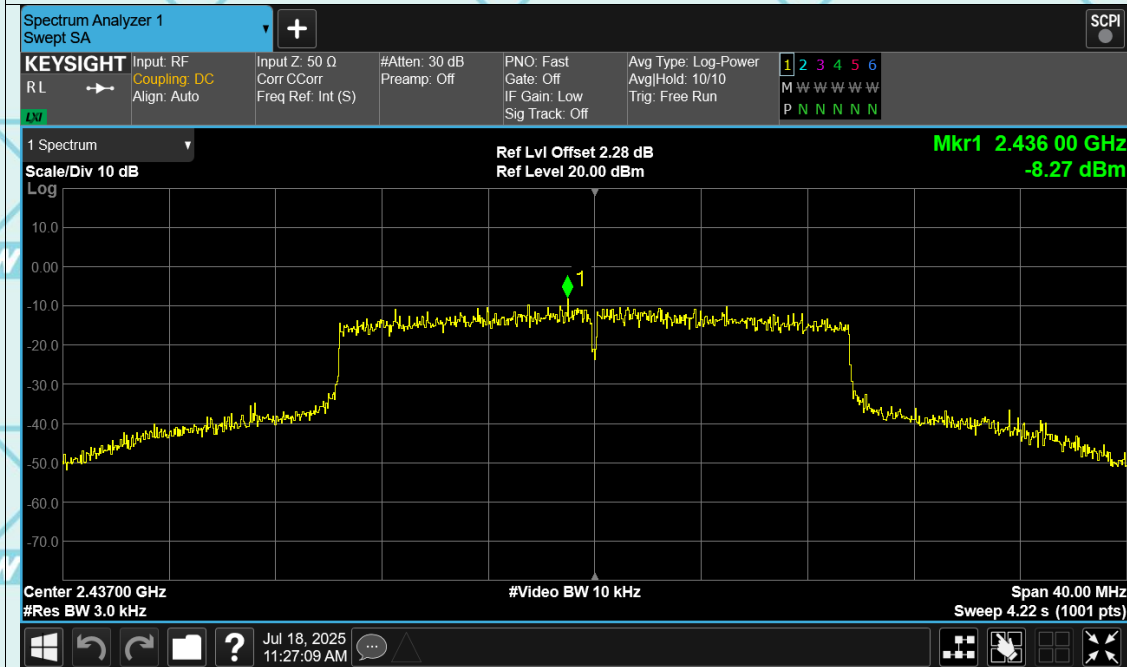


PSD ax20 2462MHz

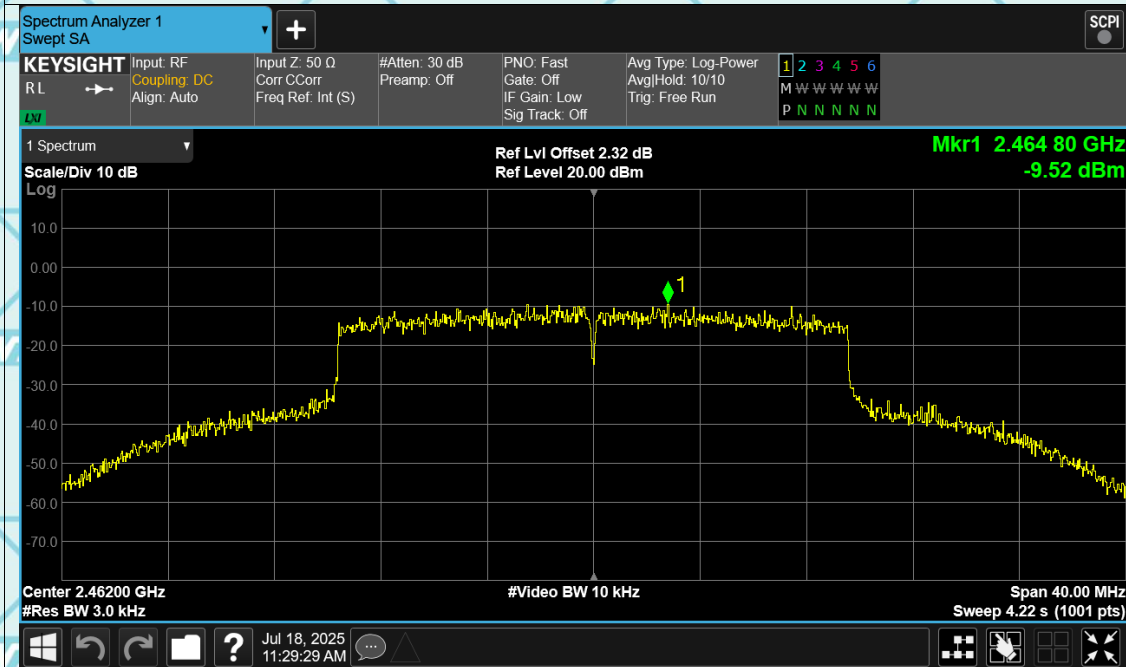


PSD ax40 2422MHz

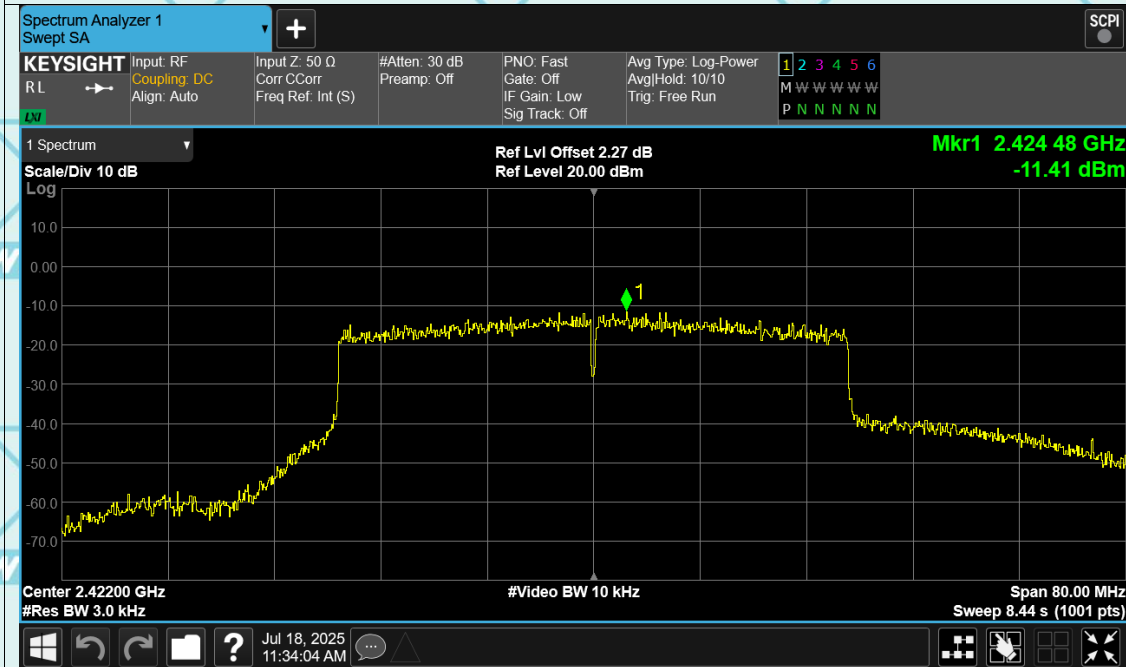

PSD ax40 2437MHz

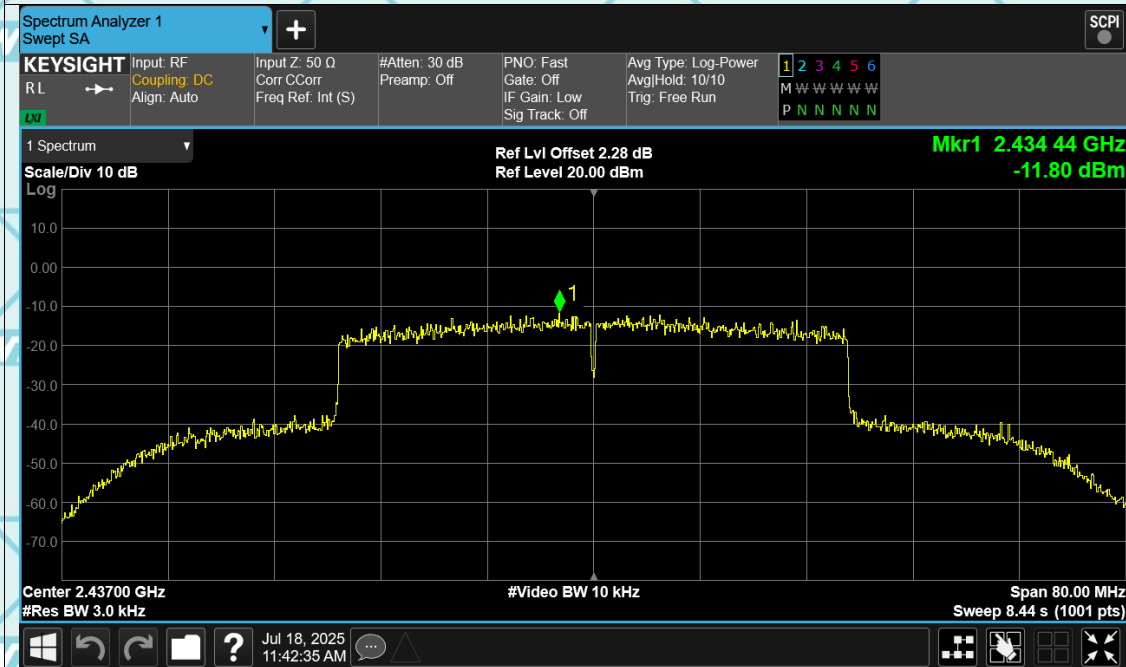


PSD ax40 2452MHz

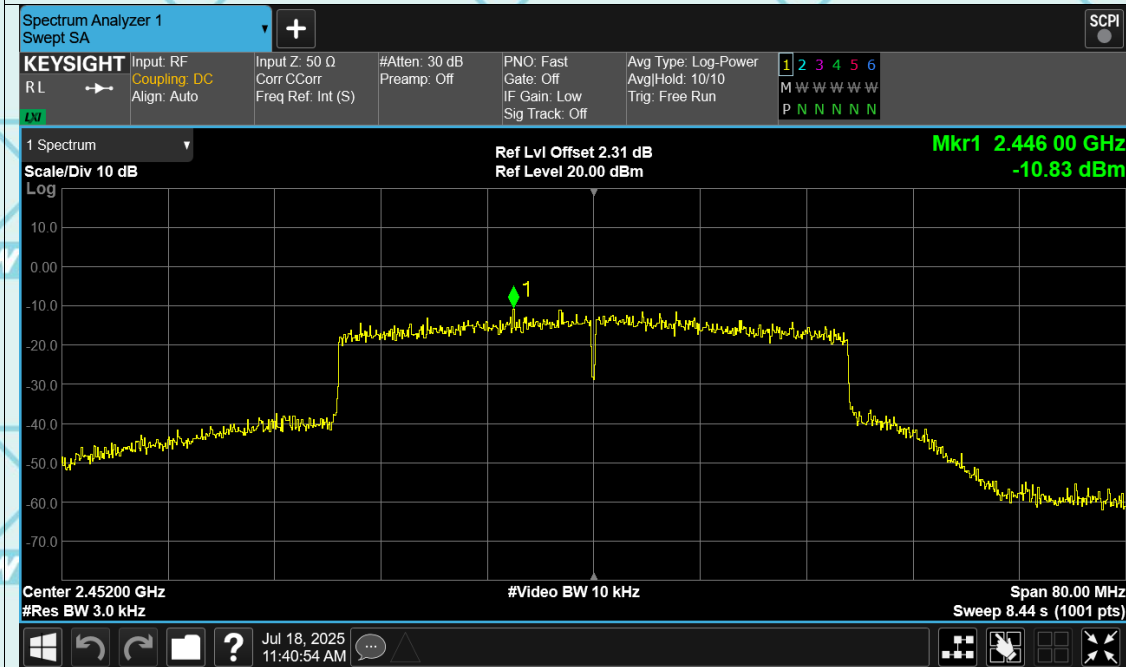


Test Graphs


PSD b 2412MHz

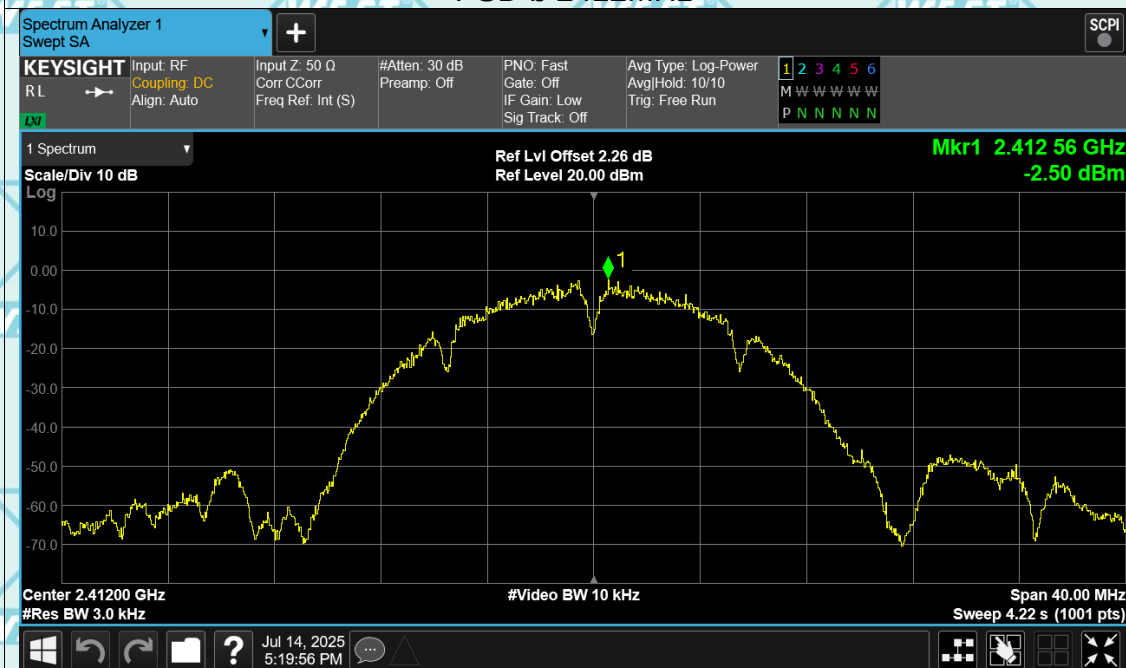


PSD b 2437MHz

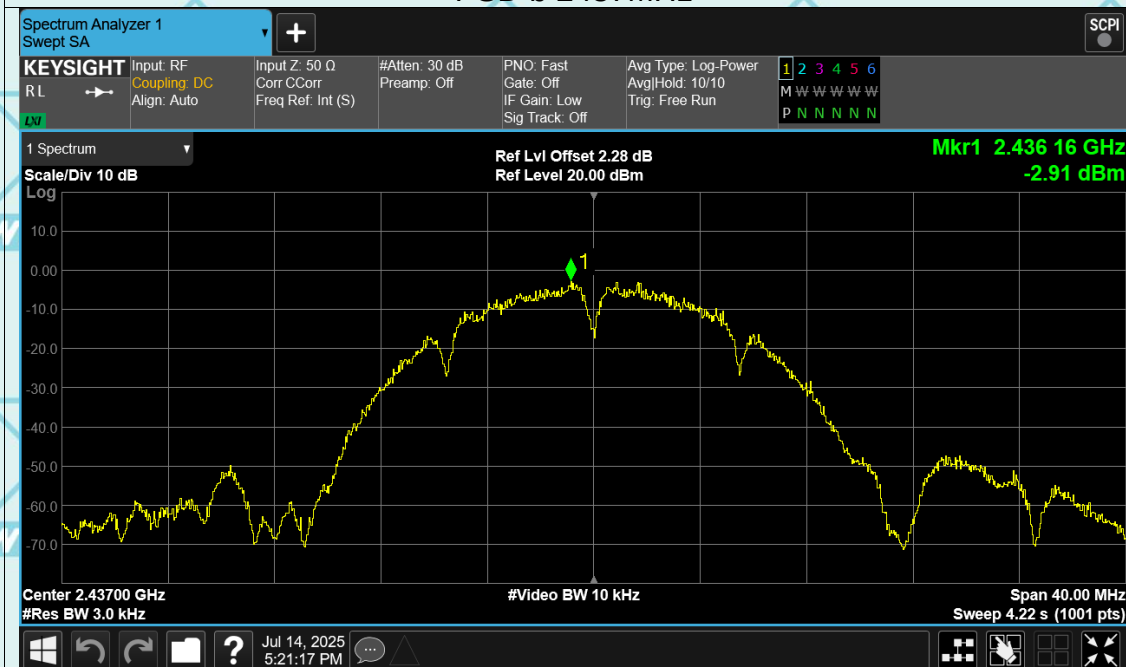


PSD b 2462MHz

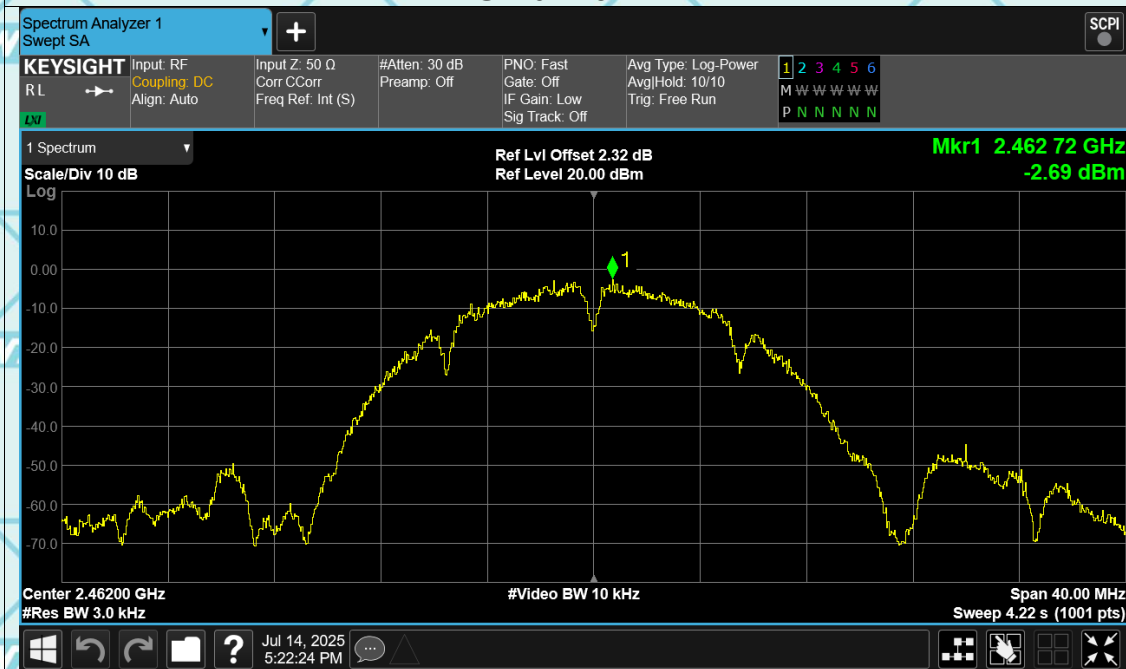

PSD g 2412MHz

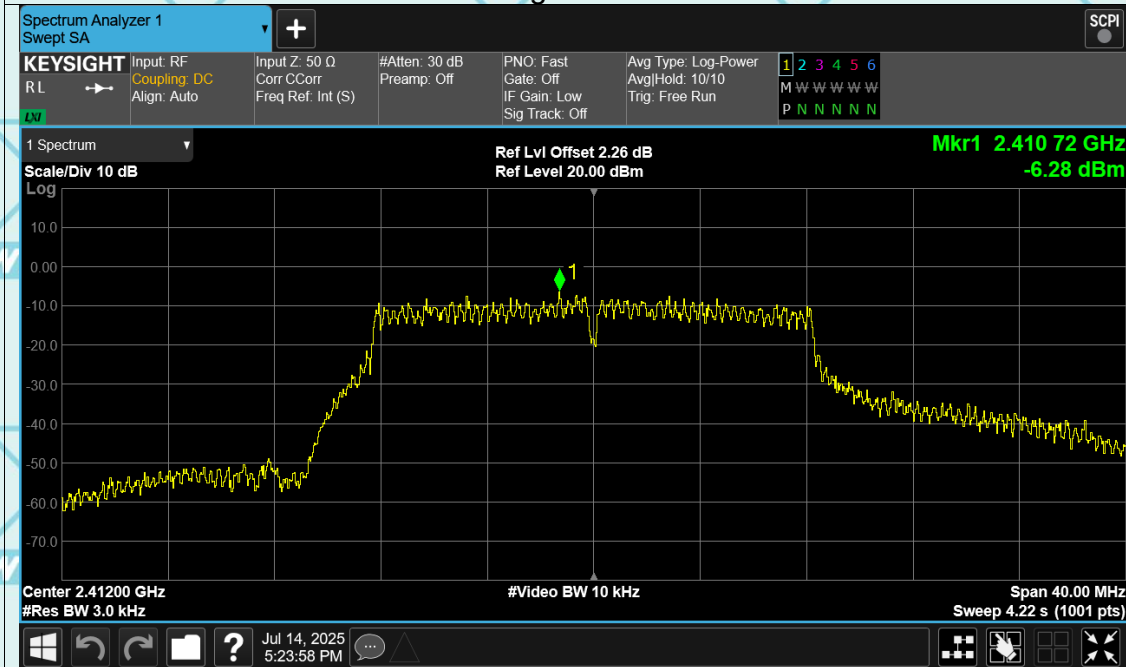

PSD g 2437MHz

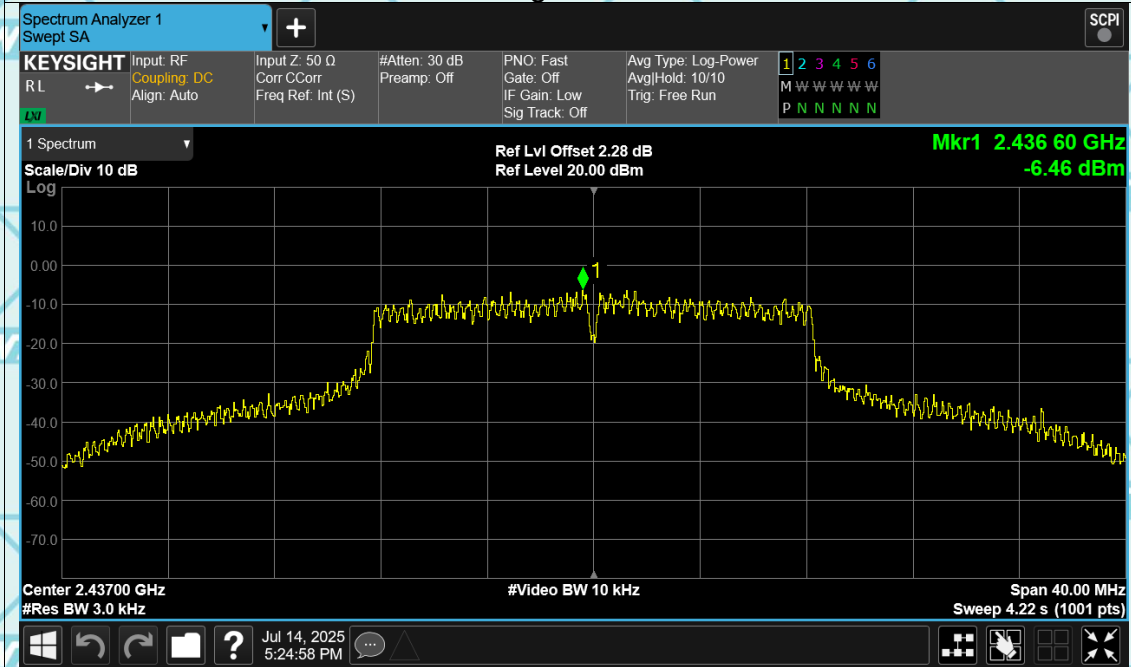

PSD g 2462MHz

