

TABLE OF CONTENTS

1. Conducted output power	2
2. Frequency stability	4
3. Peak-to-Average Ratio	5
4. Occupied bandwidth	16
5. Band edge	26
6. Out-of-band emissions	33

1. Conducted output power

<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Conducted output power (dBm)</i>	<i>Gain (dBm)</i>	<i>Gain (dBd)</i>	<i>ERP (dBm)</i>	<i>ERP Limit (dBm)</i>	<i>Verdict</i>
EGPRS850 1 Slot	128	824.2	34.14	-3.7	-5.85	28.29	38.45	PASS
EGPRS850 1 Slot	190	836.6	34.12	-3.7	-5.85	28.27	38.45	PASS
EGPRS850 1 Slot	251	848.8	34.11	-3.7	-5.85	28.26	38.45	PASS
EGPRS850 2 Slot	128	824.2	34.06	-3.7	-5.85	28.21	38.45	PASS
EGPRS850 2 Slot	190	836.6	33.95	-3.7	-5.85	28.10	38.45	PASS
EGPRS850 2 Slot	251	848.8	33.94	-3.7	-5.85	28.09	38.45	PASS
EGPRS850 3 Slot	128	824.2	33.89	-3.7	-5.85	28.04	38.45	PASS
EGPRS850 3 Slot	190	836.6	33.78	-3.7	-5.85	27.93	38.45	PASS
EGPRS850 3 Slot	251	848.8	33.76	-3.7	-5.85	27.91	38.45	PASS
EGPRS850 4 Slot	128	824.2	33.85	-3.7	-5.85	28.00	38.45	PASS
EGPRS850 4 Slot	190	836.6	33.55	-3.7	-5.85	27.70	38.45	PASS
EGPRS850 4 Slot	251	848.8	33.42	-3.7	-5.85	27.57	38.45	PASS
GPRS850 1 Slot	128	824.2	35.39	-3.7	-5.85	29.54	38.45	PASS
GPRS850 1 Slot	190	836.6	35.44	-3.7	-5.85	29.59	38.45	PASS
GPRS850 1 Slot	251	848.8	35.24	-3.7	-5.85	29.39	38.45	PASS
GPRS850 2 Slot	128	824.2	34.51	-3.7	-5.85	28.66	38.45	PASS
GPRS850 2 Slot	190	836.6	34.61	-3.7	-5.85	28.76	38.45	PASS
GPRS850 2 Slot	251	848.8	34.23	-3.7	-5.85	28.38	38.45	PASS
GPRS850 3 Slot	128	824.2	32.09	-3.7	-5.85	26.24	38.45	PASS
GPRS850 3 Slot	190	836.6	32.3	-3.7	-5.85	26.45	38.45	PASS
GPRS850 3 Slot	251	848.8	31.74	-3.7	-5.85	25.89	38.45	PASS
GPRS850 4 Slot	128	824.2	30.71	-3.7	-5.85	24.86	38.45	PASS
GPRS850 4 Slot	190	836.6	30.91	-3.7	-5.85	25.06	38.45	PASS
GPRS850 4 Slot	251	848.8	30.27	-3.7	-5.85	24.42	38.45	PASS
GSM850	128	824.2	35.38	-3.7	-5.85	29.53	38.45	PASS
GSM850	190	836.6	35.43	-3.7	-5.85	29.58	38.45	PASS
GSM850	251	848.8	35.25	-3.7	-5.85	29.40	38.45	PASS

<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Conducted output power (dBm)</i>	<i>Gain (dBm)</i>	<i>EIRP (dBm)</i>	<i>EIRP Limit (dBm)</i>	<i>Verdict</i>
EGPRS1900 1 Slot	512	1850.2	27.81	-3.3	24.51	33.01	PASS
EGPRS1900 1 Slot	661	1880	28.15	-3.3	24.85	33.01	PASS
EGPRS1900 1 Slot	810	1909.8	28.28	-3.3	24.98	33.01	PASS
EGPRS1900 2 Slot	512	1850.2	27.72	-3.3	24.42	33.01	PASS
EGPRS1900 2 Slot	661	1880	27.9	-3.3	24.60	33.01	PASS
EGPRS1900 2 Slot	810	1909.8	27.8	-3.3	24.50	33.01	PASS
EGPRS1900 3 Slot	512	1850.2	27.16	-3.3	23.86	33.01	PASS
EGPRS1900 3 Slot	661	1880	27	-3.3	23.70	33.01	PASS
EGPRS1900 3 Slot	810	1909.8	27.11	-3.3	23.81	33.01	PASS
EGPRS1900 4 Slot	512	1850.2	26.33	-3.3	23.03	33.01	PASS
EGPRS1900 4 Slot	661	1880	26.72	-3.3	23.42	33.01	PASS
EGPRS1900 4 Slot	810	1909.8	26.49	-3.3	23.19	33.01	PASS
GPRS1900 1 Slot	512	1850.2	29.01	-3.3	25.71	33.01	PASS
GPRS1900 1 Slot	661	1880	29.07	-3.3	25.77	33.01	PASS
GPRS1900 1 Slot	810	1909.8	28.93	-3.3	25.63	33.01	PASS
GPRS1900 2 Slot	512	1850.2	28.13	-3.3	24.83	33.01	PASS
GPRS1900 2 Slot	661	1880	28.15	-3.3	24.85	33.01	PASS
GPRS1900 2 Slot	810	1909.8	27.97	-3.3	24.67	33.01	PASS
GPRS1900 3 Slot	512	1850.2	26.13	-3.3	22.83	33.01	PASS
GPRS1900 3 Slot	661	1880	26.13	-3.3	22.83	33.01	PASS
GPRS1900 3 Slot	810	1909.8	25.89	-3.3	22.59	33.01	PASS
GPRS1900 4 Slot	512	1850.2	24.82	-3.3	21.52	33.01	PASS
GPRS1900 4 Slot	661	1880	24.84	-3.3	21.54	33.01	PASS
GPRS1900 4 Slot	810	1909.8	24.55	-3.3	21.25	33.01	PASS
GSM1900	512	1850.2	28.97	-3.3	25.67	33.01	PASS
GSM1900	661	1880	29.02	-3.3	25.72	33.01	PASS
GSM1900	810	1909.8	28.89	-3.3	25.59	33.01	PASS


2.Frequency stability

<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Result(Hz)</i>	<i>Result (ppm)</i>	<i>Low Limit (ppm)</i>	<i>high Limit (ppm)</i>	<i>Verdict</i>
EGPRS850	128	824.2	-816.8643	-0.99	-2.500	2.5	PASS
EGPRS850	190	836.6	-10.46062	-0.01	-2.500	2.5	PASS
EGPRS850	251	848.8	234.589	0.28	-2.500	2.5	PASS
GPRS850	128	824.2	-4.068017	0.00	-2.500	2.5	PASS
GPRS850	190	836.6	-2.292295	0.00	-2.500	2.5	PASS
GPRS850	251	848.8	-0.9362896	0.00	-2.500	2.5	PASS
GSM850	128	824.2	-0.03	0.000	-2.5	2.5	PASS
GSM850	190	836.6	-3.00	-0.004	-2.5	2.5	PASS
GSM850	251	848.8	-5.07	-0.006	-2.5	2.5	PASS
EGPRS1900	512	1850.2	-5.779167	0.00	-2.500	2.5	PASS
EGPRS1900	661	1880	-7.135173	0.00	-2.500	2.5	PASS
EGPRS1900	810	1909.8	-4.294018	0.00	-2.500	2.5	PASS
GPRS1900	512	1850.2	-3.777444	0.00	-2.500	2.5	PASS
GPRS1900	661	1880	-2.195438	0.00	-2.500	2.5	PASS
GPRS1900	810	1909.8	-9.976327	-0.01	-2.500	2.5	PASS
GSM1900	512	1850.2	-1.58	-0.001	-2.5	2.5	PASS
GSM1900	661	1880	-9.49	-0.005	-2.5	2.5	PASS
GSM1900	810	1909.8	-2.03	-0.001	-2.5	2.5	PASS


Note: (Voltage: 3.92V, Temperature: 25°C) only reflect the worst mode.

3. Peak-to-Average Ratio


<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Result (dB)</i>	<i>high Limit (dB)</i>	<i>Verdict</i>
EGPRS850	128	824.2	3.969230769	13.00	PASS
EGPRS850	190	836.6	4.081269841	13.00	PASS
EGPRS850	251	848.8	3.970784314	13.00	PASS
GPRS850	128	824.2	2.66349345	13.00	PASS
GPRS850	190	836.6	2.653974933	13.00	PASS
GPRS850	251	848.8	2.663489037	13.00	PASS
GSM850	128	824.2	2.62	13	PASS
GSM850	190	836.6	2.65	13	PASS
GSM850	251	848.8	2.63	13	PASS
EGPRS1900	512	1850.2	5.973149905	13.00	PASS
EGPRS1900	661	1880	6.085721232	13.00	PASS
EGPRS1900	810	1909.8	6.229601874	13.00	PASS
GPRS1900	512	1850.2	2.751892523	13.00	PASS
GPRS1900	661	1880	2.737182867	13.00	PASS
GPRS1900	810	1909.8	2.724253076	13.00	PASS
GSM1900	512	1850.2	2.71	13	PASS
GSM1900	661	1880	2.70	13	PASS
GSM1900	810	1909.8	2.69	13	PASS

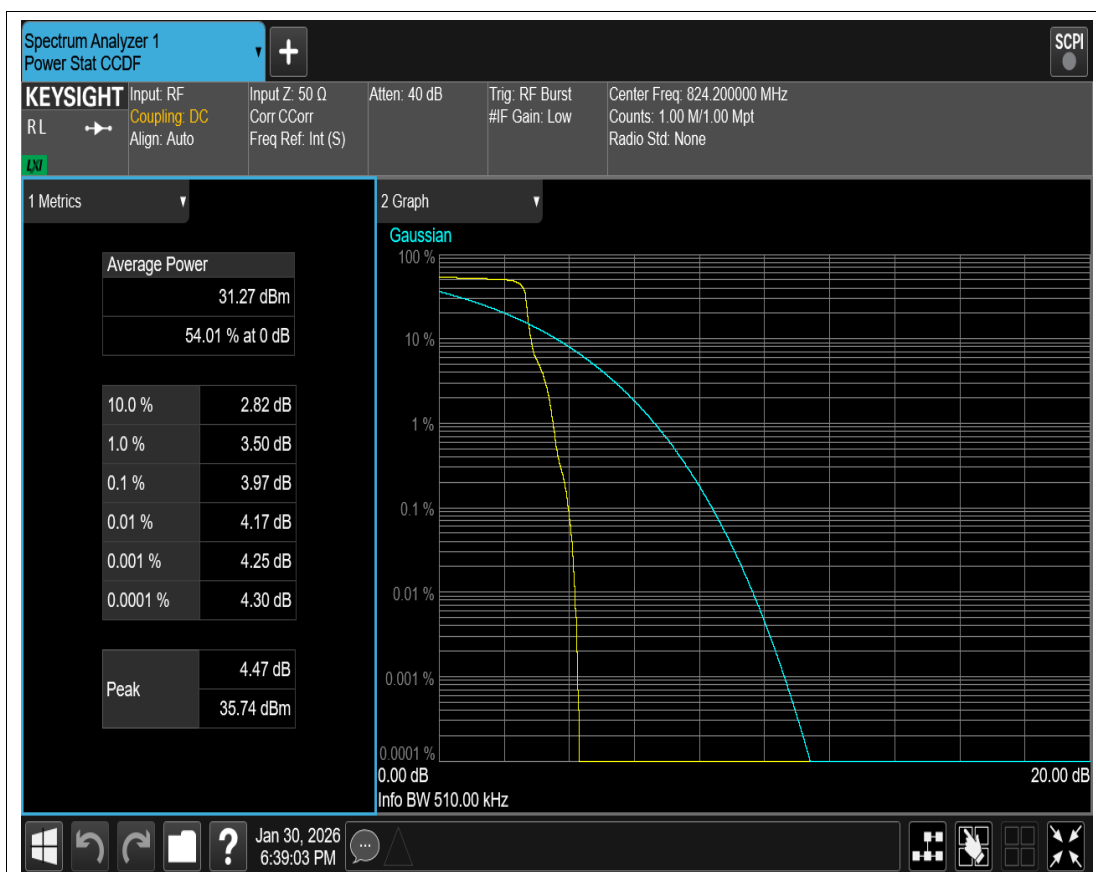


EGPRS850 Channel=128

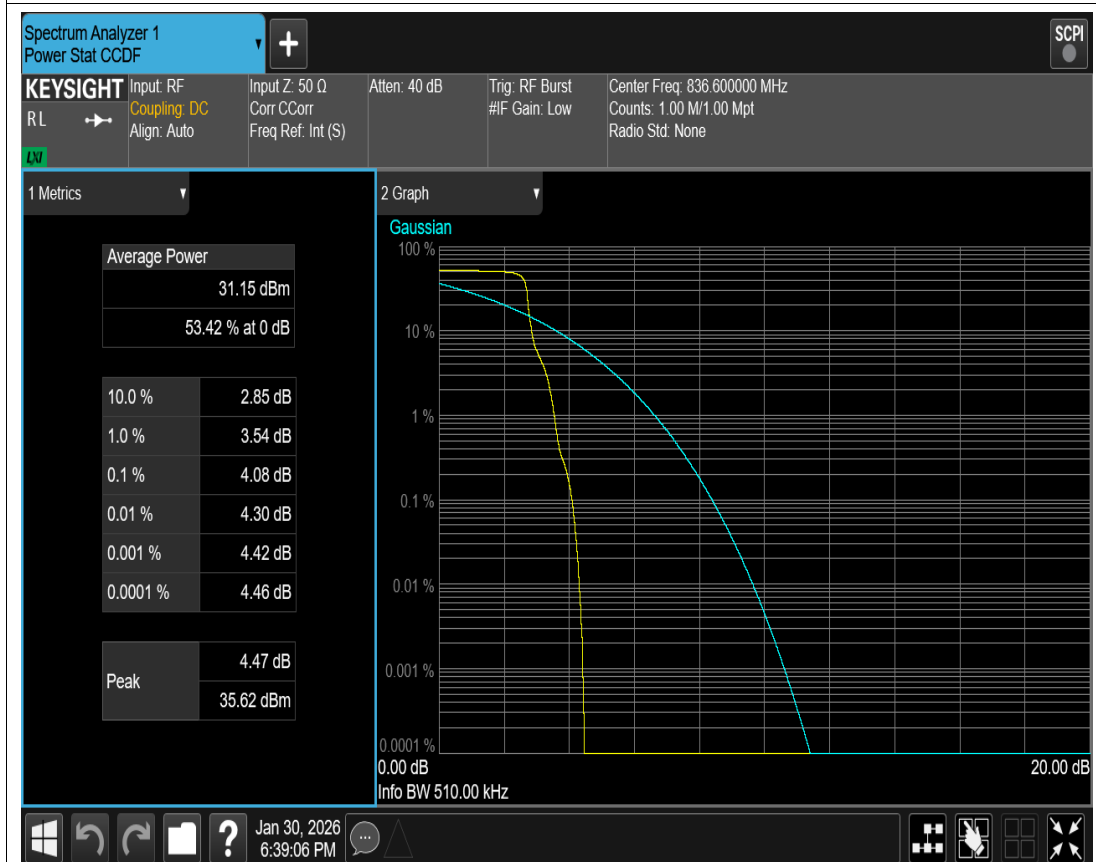


EGPRS850 Channel=190

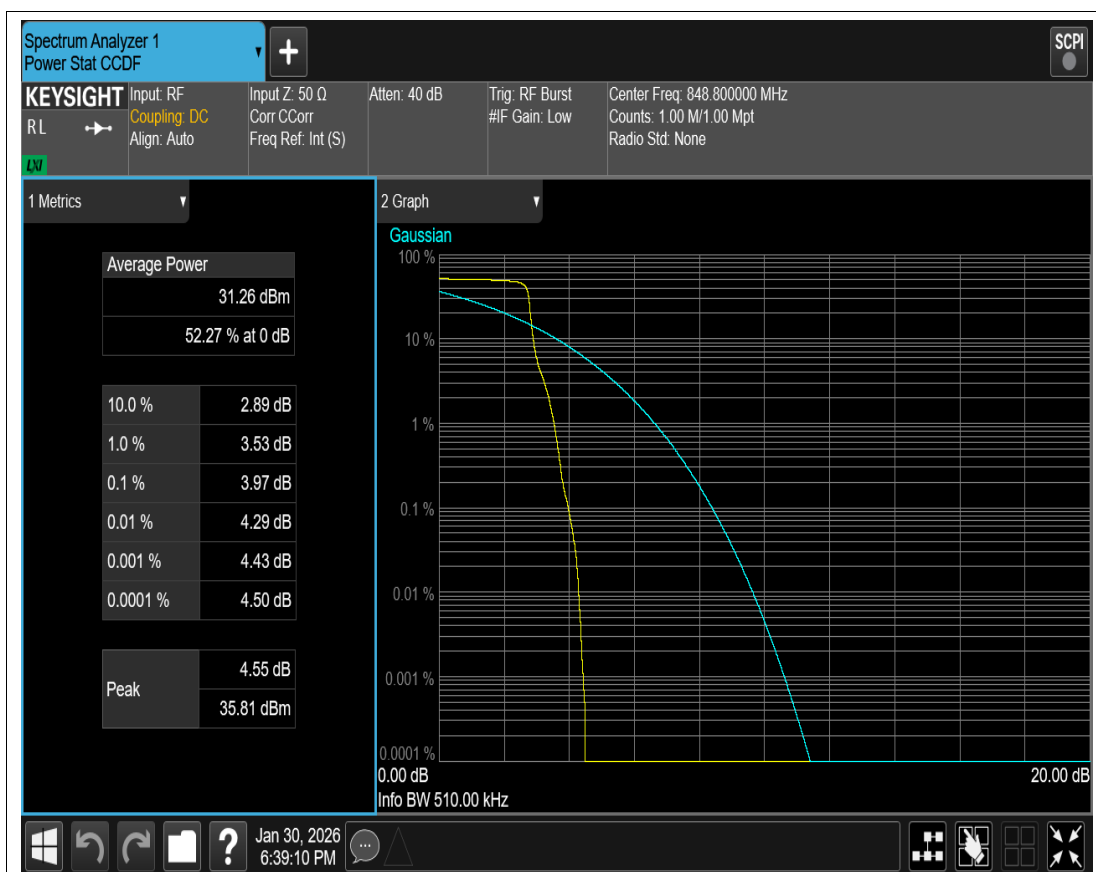


EGPRS850 Channel=251

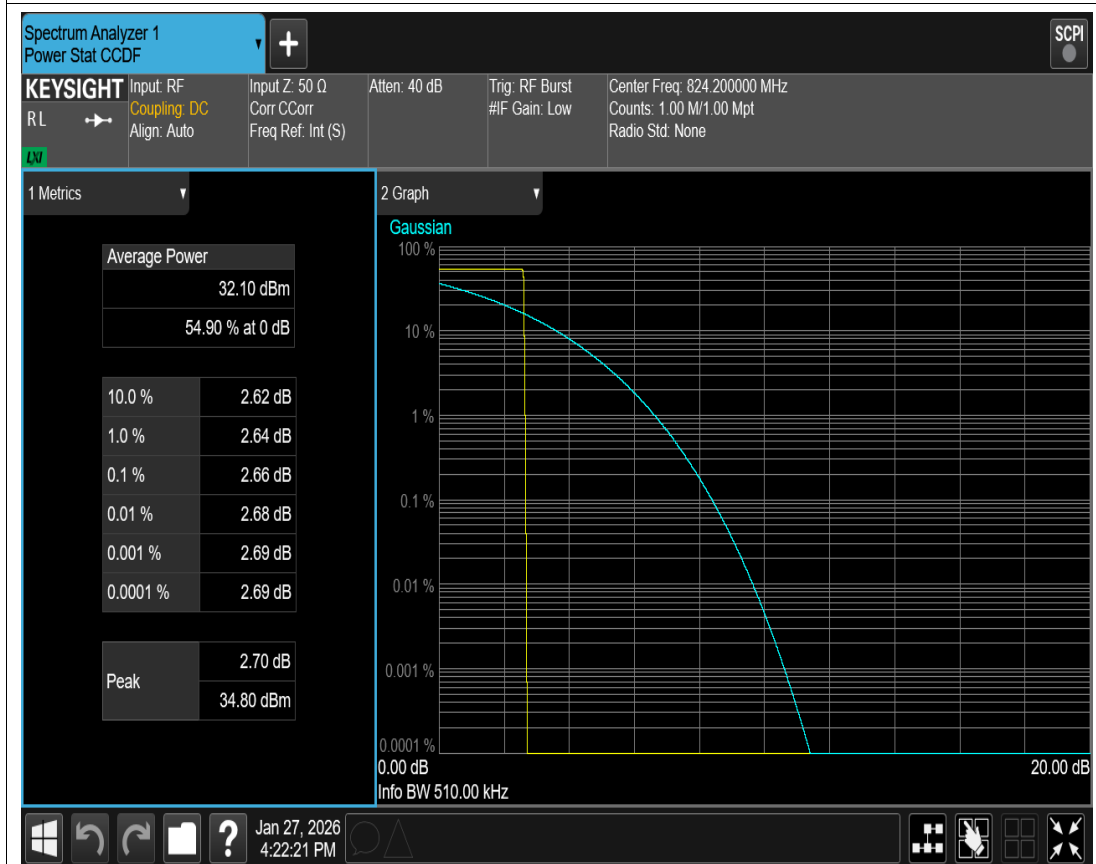


GPRS850 Channel=128

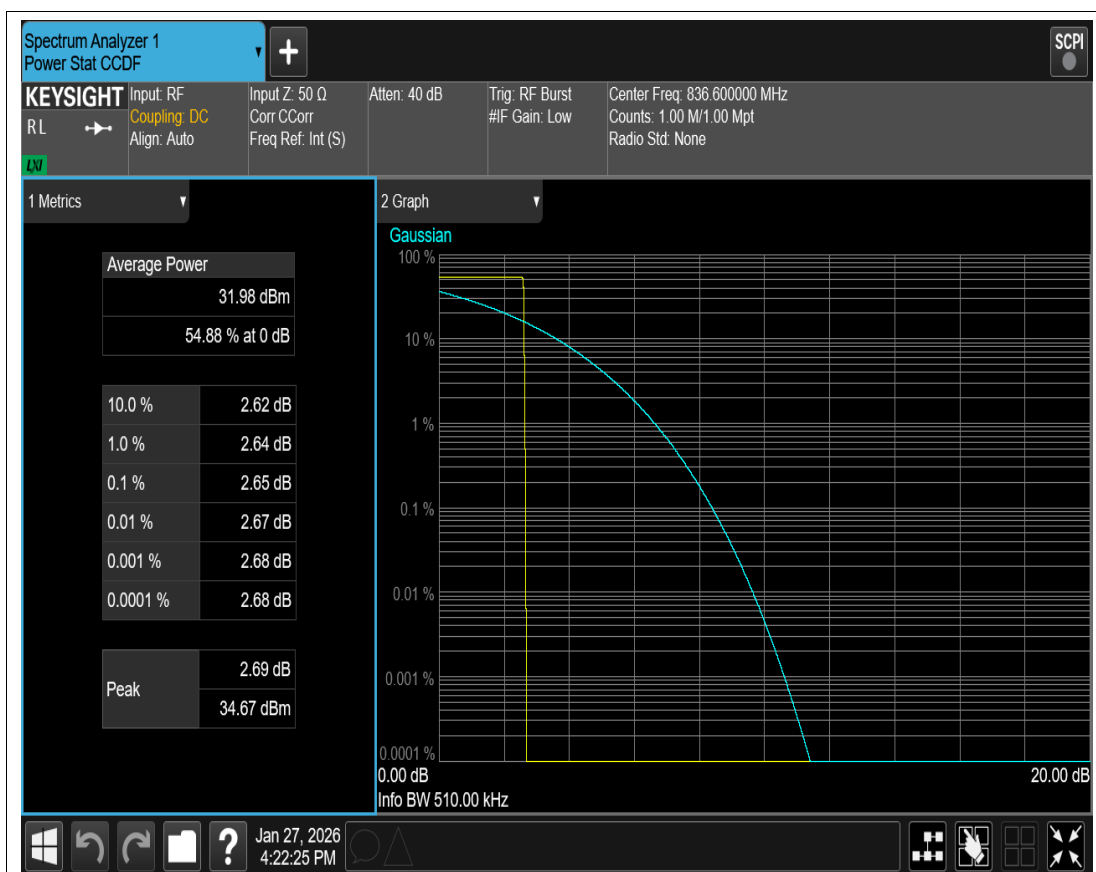


GPRS850 Channel=190

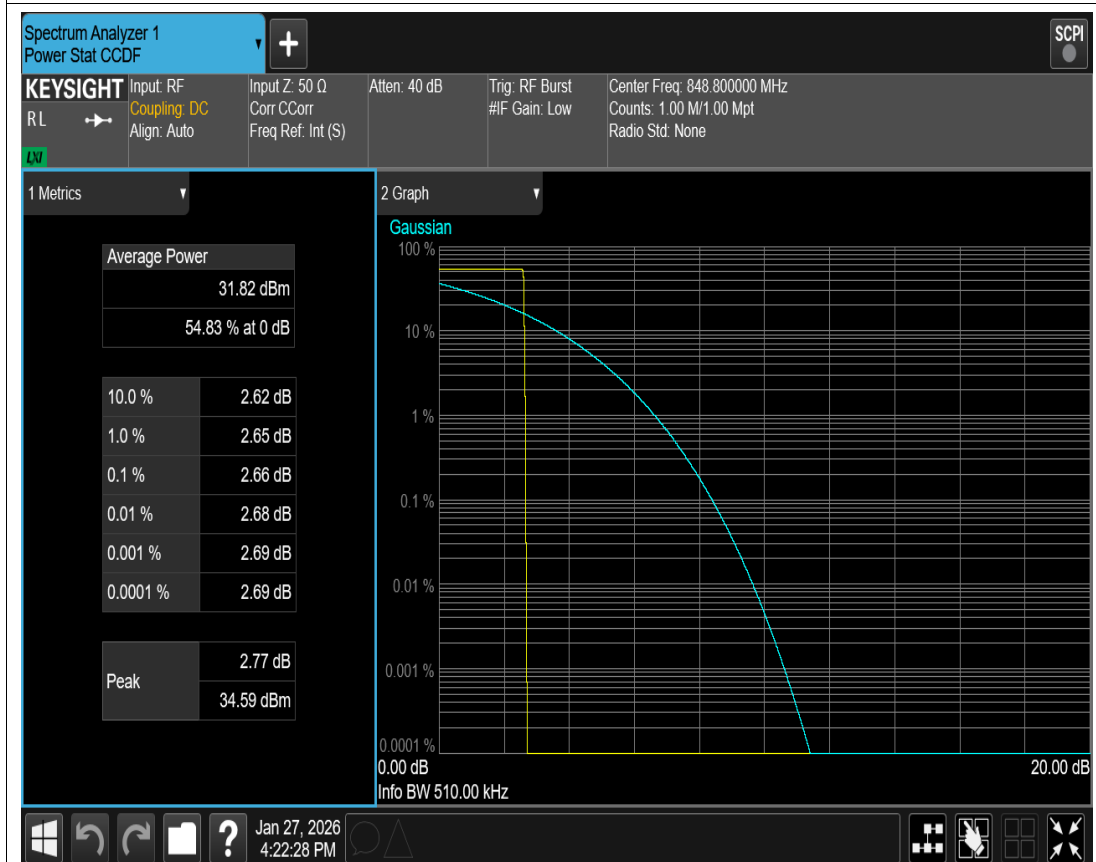


GPRS850 Channel=251

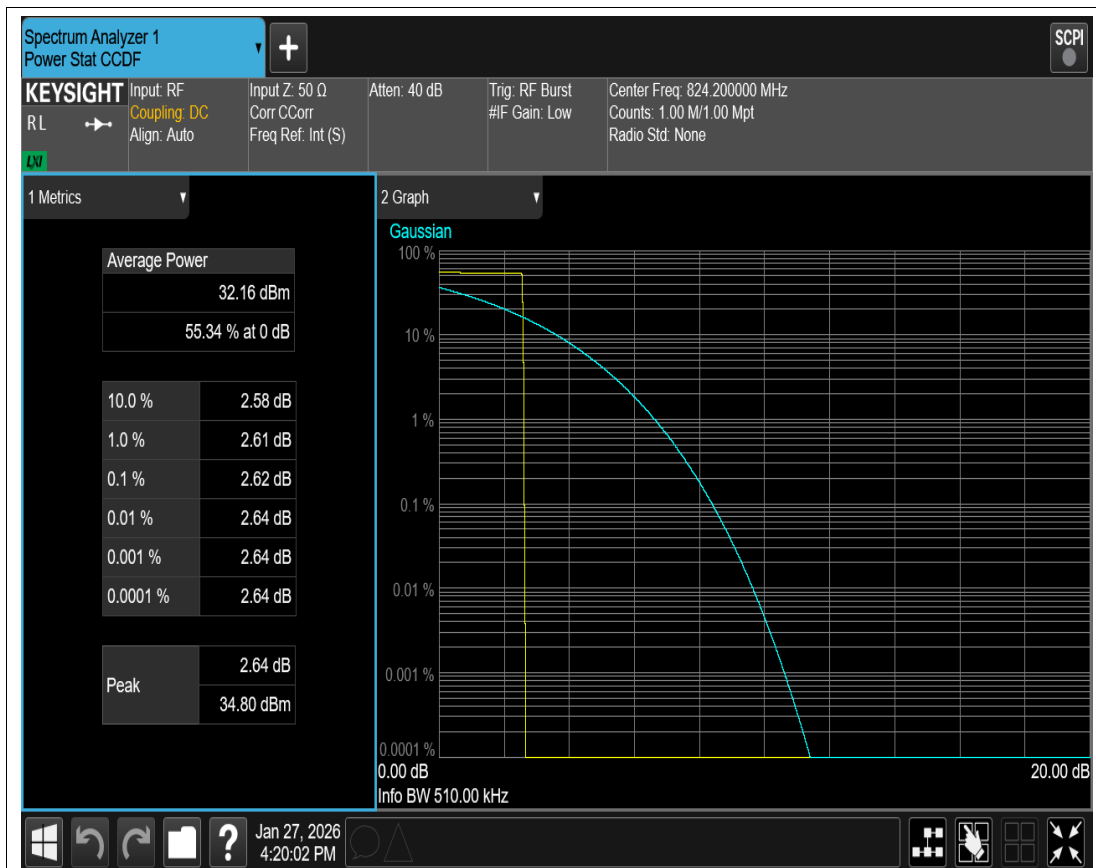

GSM850 Channel=128

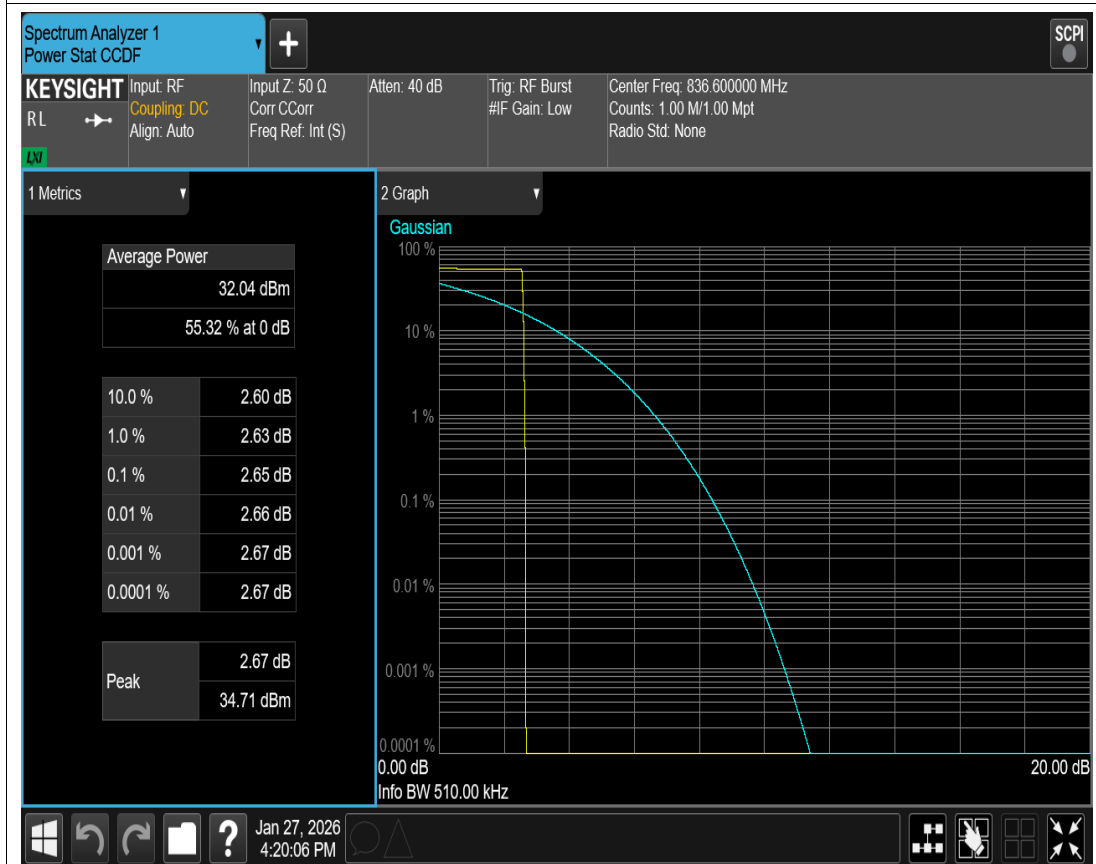


GSM850 Channel=190

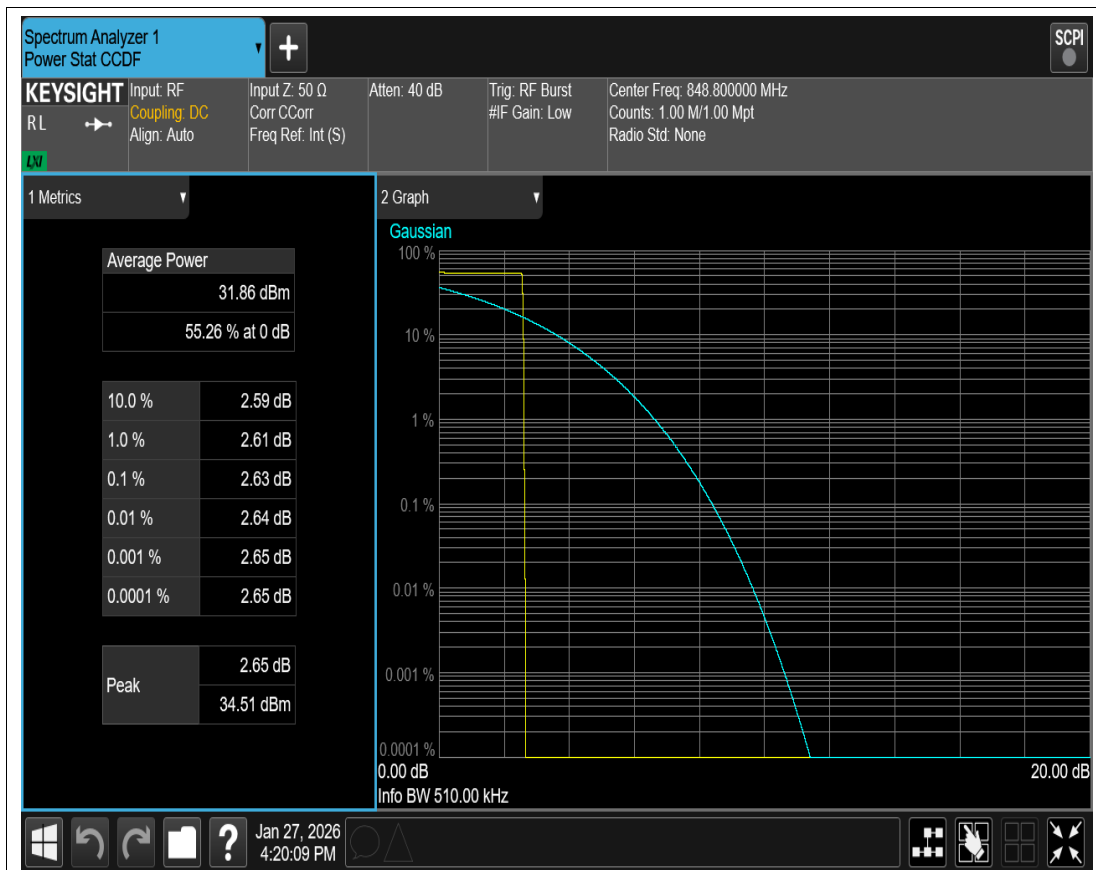

GSM850 Channel=251




EGPRS1900 Channel=512

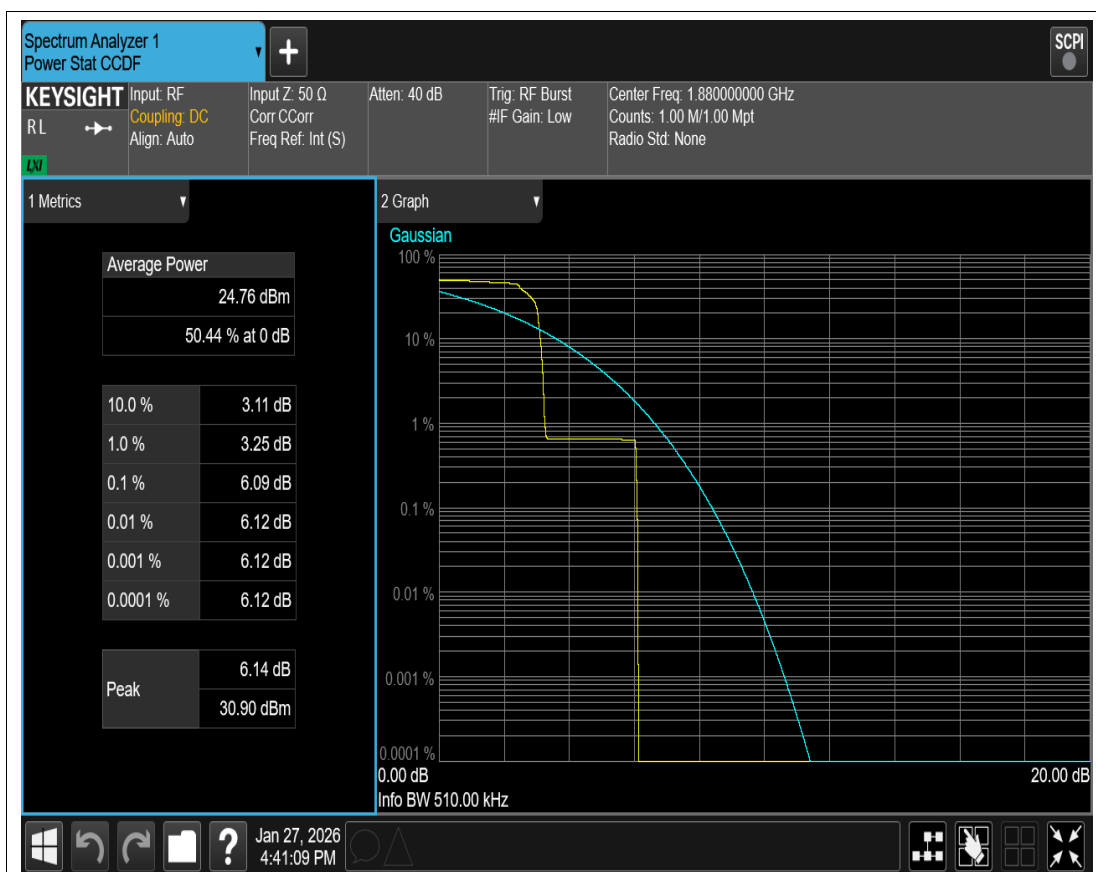


EGPRS1900 Channel=661




EGPRS1900 Channel=810

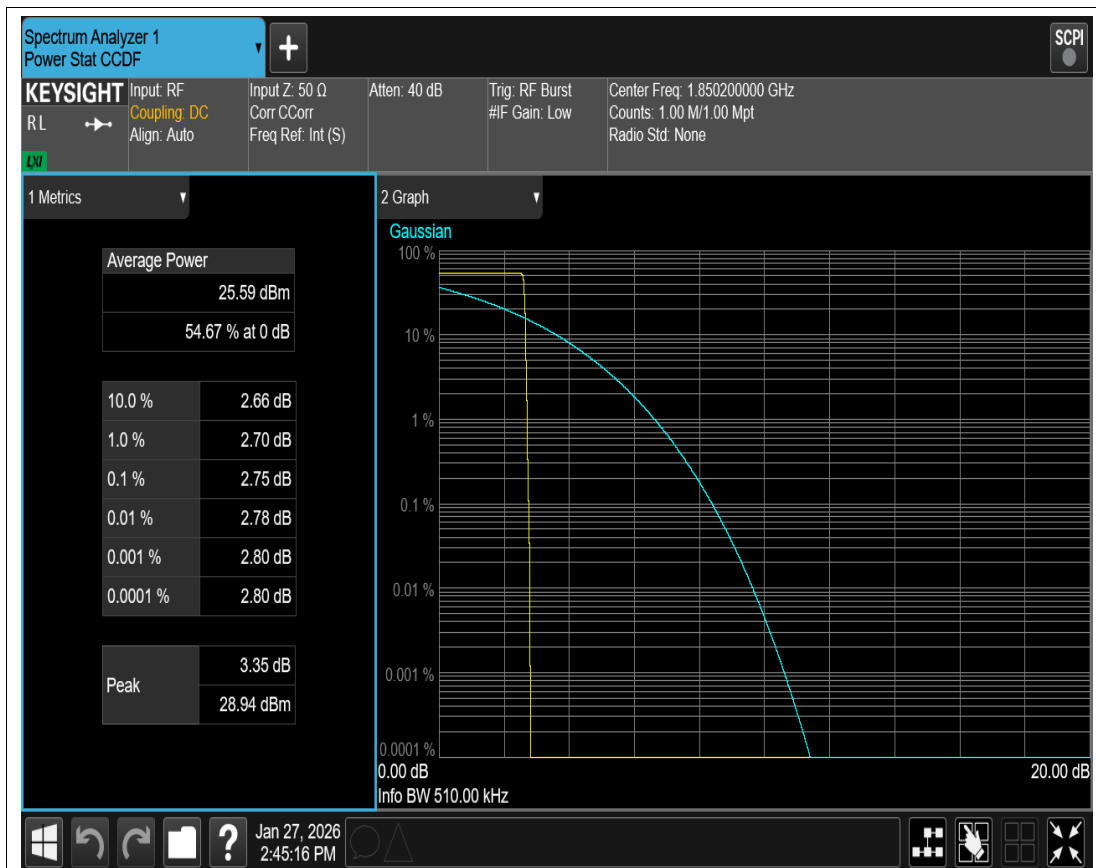


GPRS1900 Channel=512

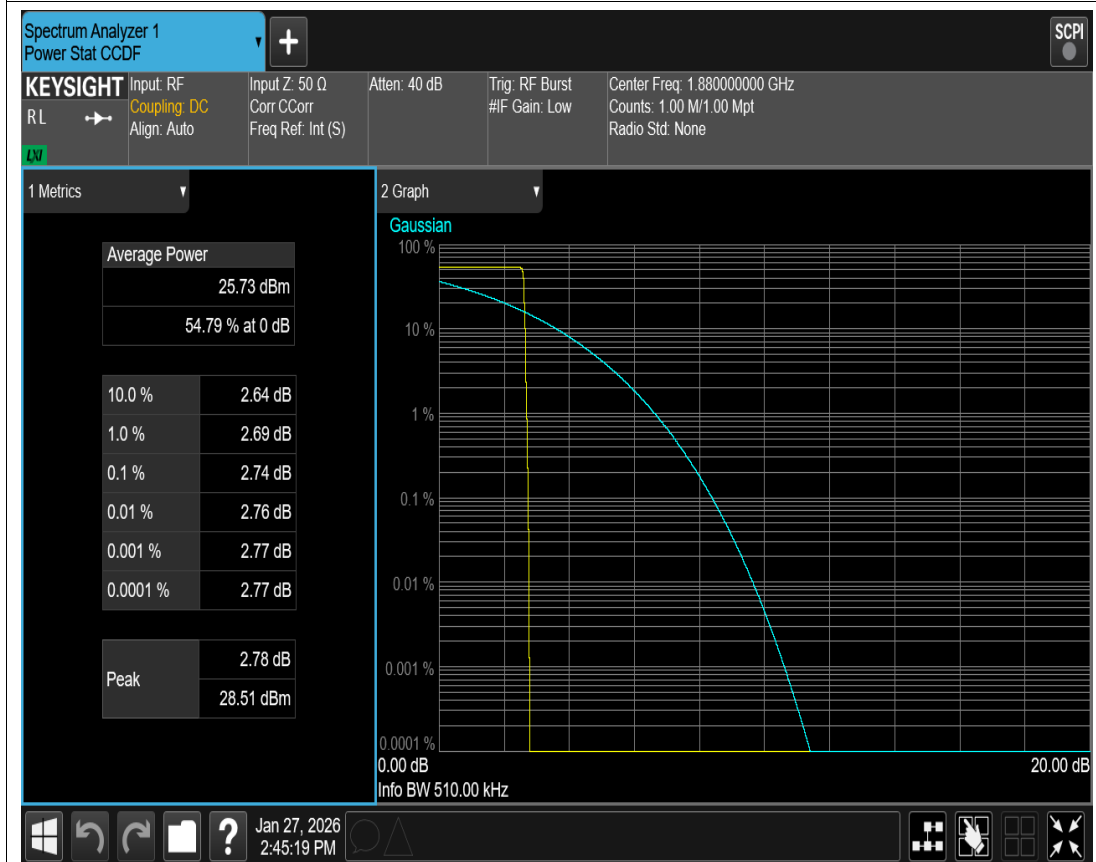


GPRS1900 Channel=661

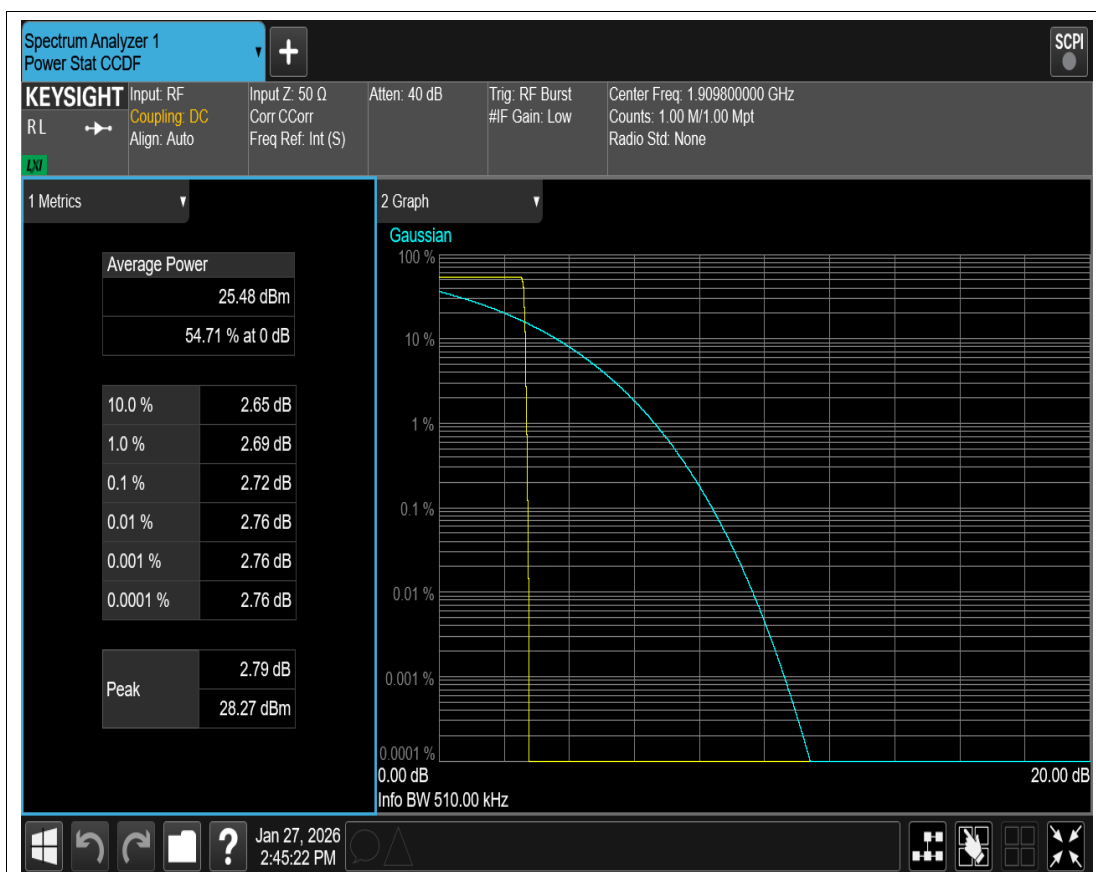


GPRS1900 Channel=810

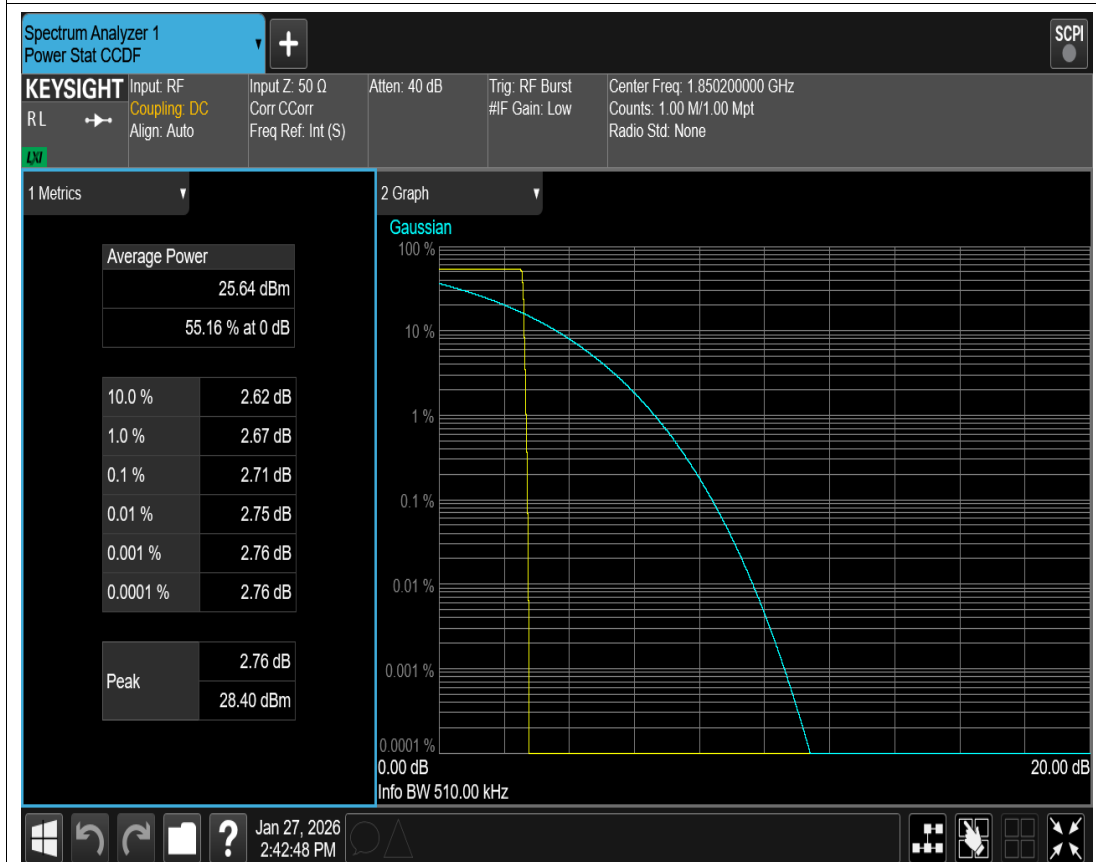

GSM1900 Channel=512

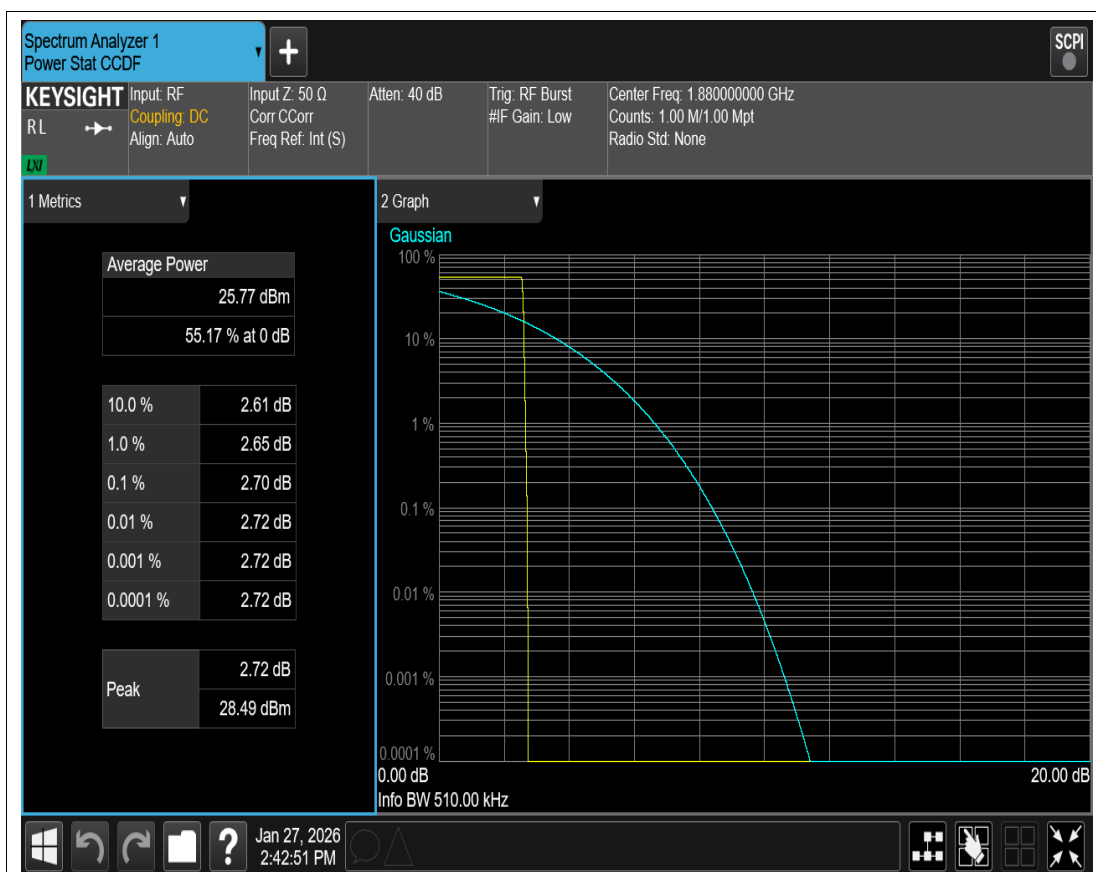


GSM1900 Channel=661

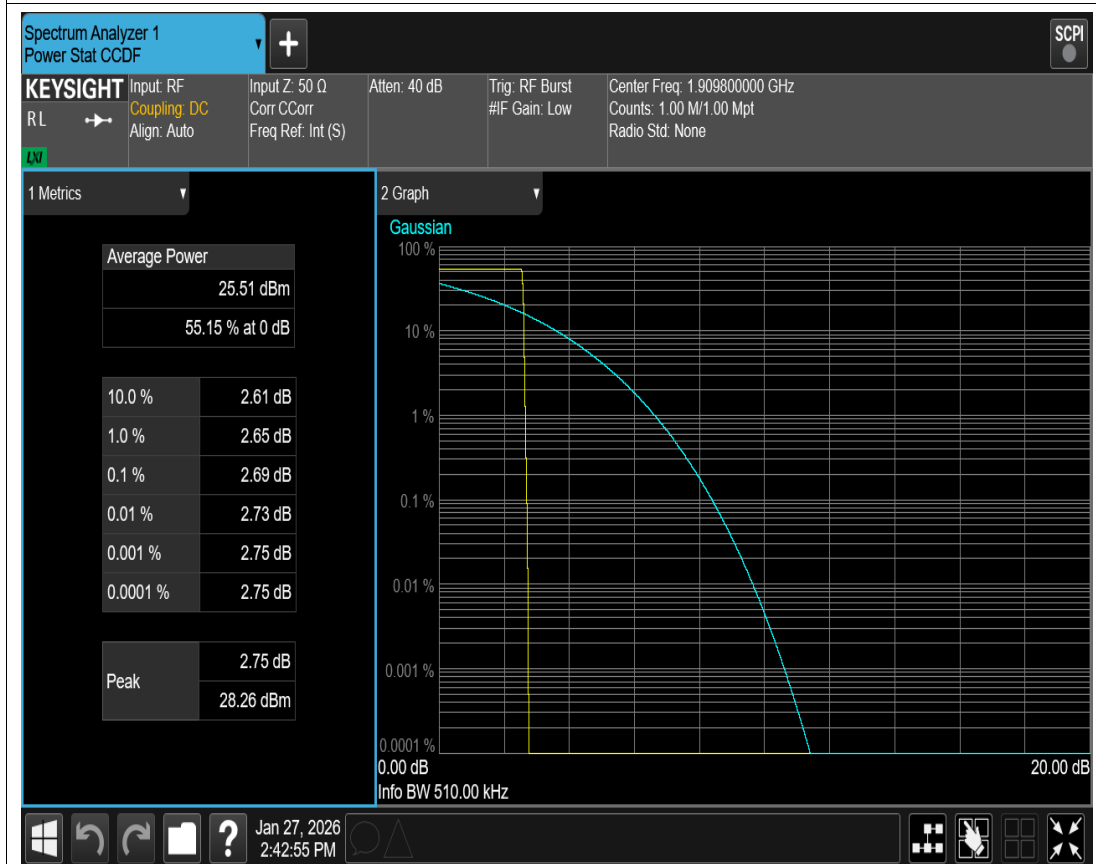


GSM1900 Channel=810

4.Occupied bandwidth

<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>99% OBW (kHz)</i>	<i>-26dB EBW (kHz)</i>	<i>Verdict</i>
EGPRS850	128	824.2	574.913	861.756	PASS
EGPRS850	190	836.6	599.291	922.767	PASS
EGPRS850	251	848.8	627.904	942.237	PASS
GPRS850	128	824.2	245.996	314.286	PASS
GPRS850	190	836.6	244.992	312.851	PASS
GPRS850	251	848.8	246.798	310.475	PASS
GSM850	128	824.2	244.515	319.656	PASS
GSM850	190	836.6	239.728	309.957	PASS
GSM850	251	848.8	250.044	321.893	PASS
EGPRS1900	512	1850.2	345.902	427.108	PASS
EGPRS1900	661	1880	338.346	429.623	PASS
EGPRS1900	810	1909.8	341.567	461.470	PASS
GPRS1900	512	1850.2	247.836	324.816	PASS
GPRS1900	661	1880	248.433	313.745	PASS
GPRS1900	810	1909.8	245.642	320.453	PASS
GSM1900	512	1850.2	244.708	315.593	PASS
GSM1900	661	1880	248.956	317.992	PASS
GSM1900	810	1909.8	244.935	318.089	PASS

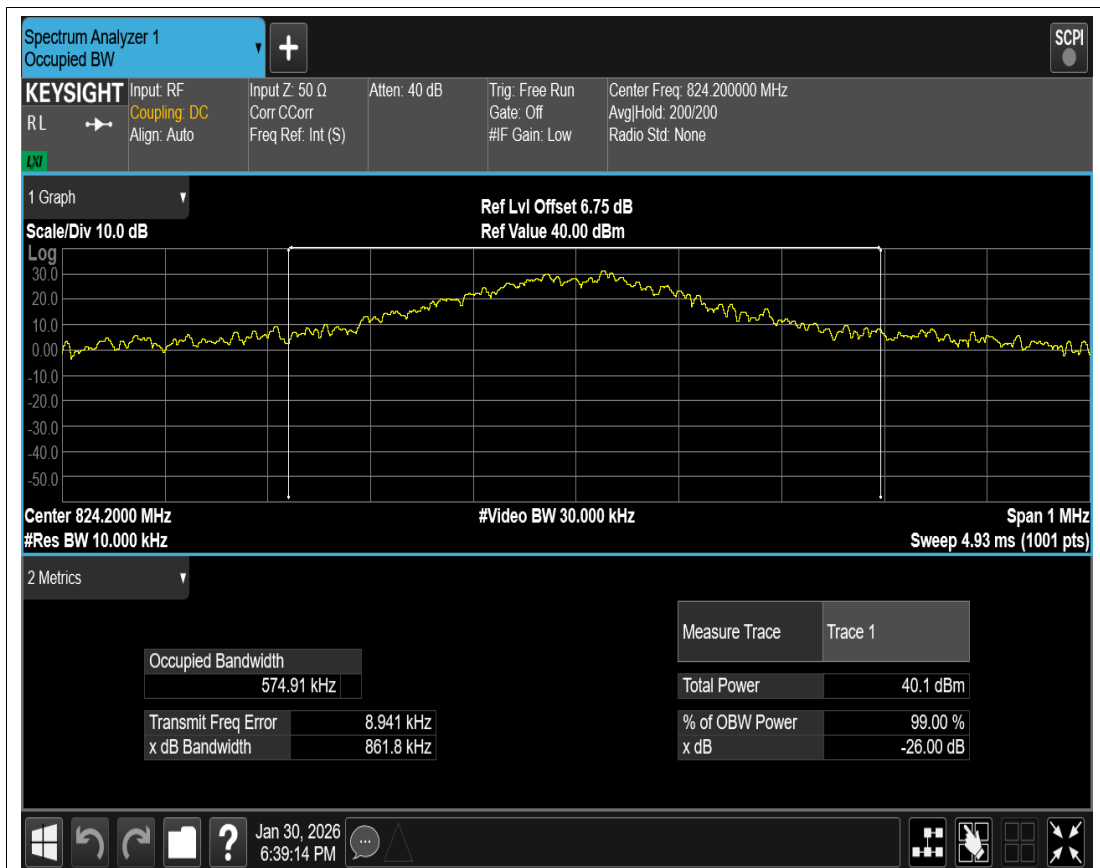


EGPRS850 Channel=128

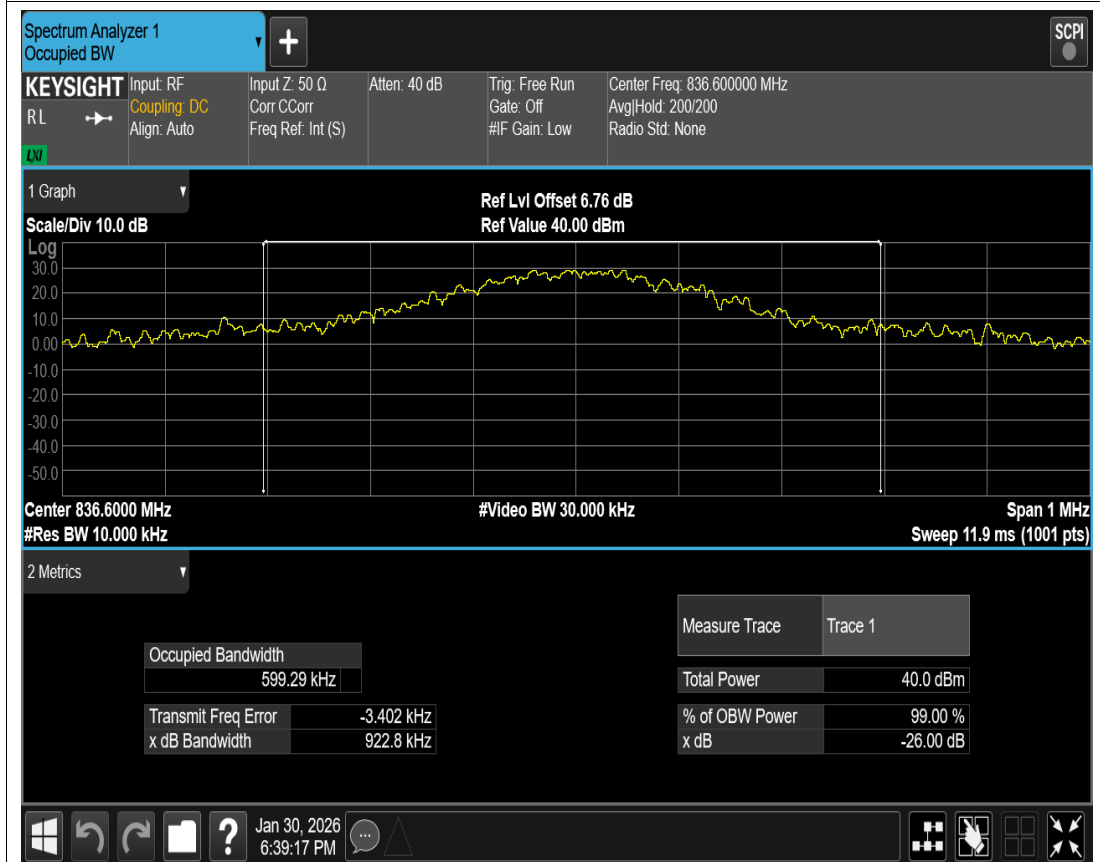


EGPRS850 Channel=190




EGPRS850 Channel=251

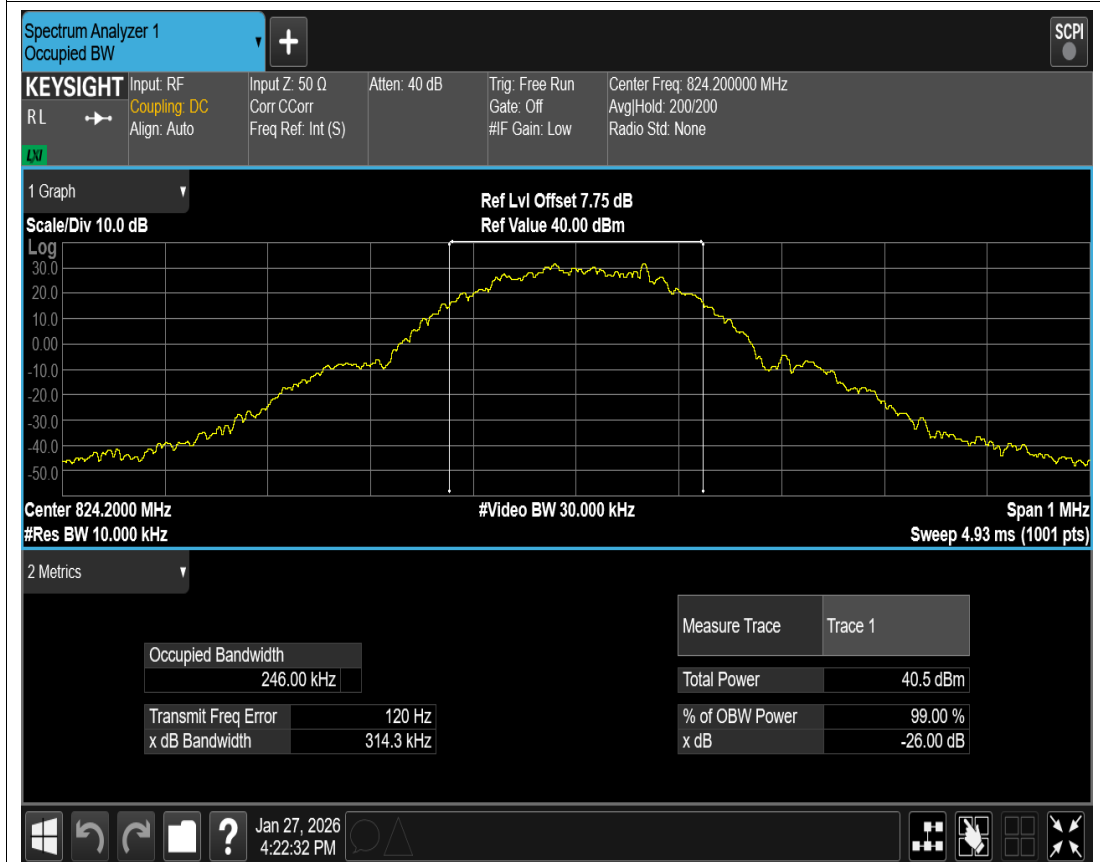


GPRS850 Channel=128

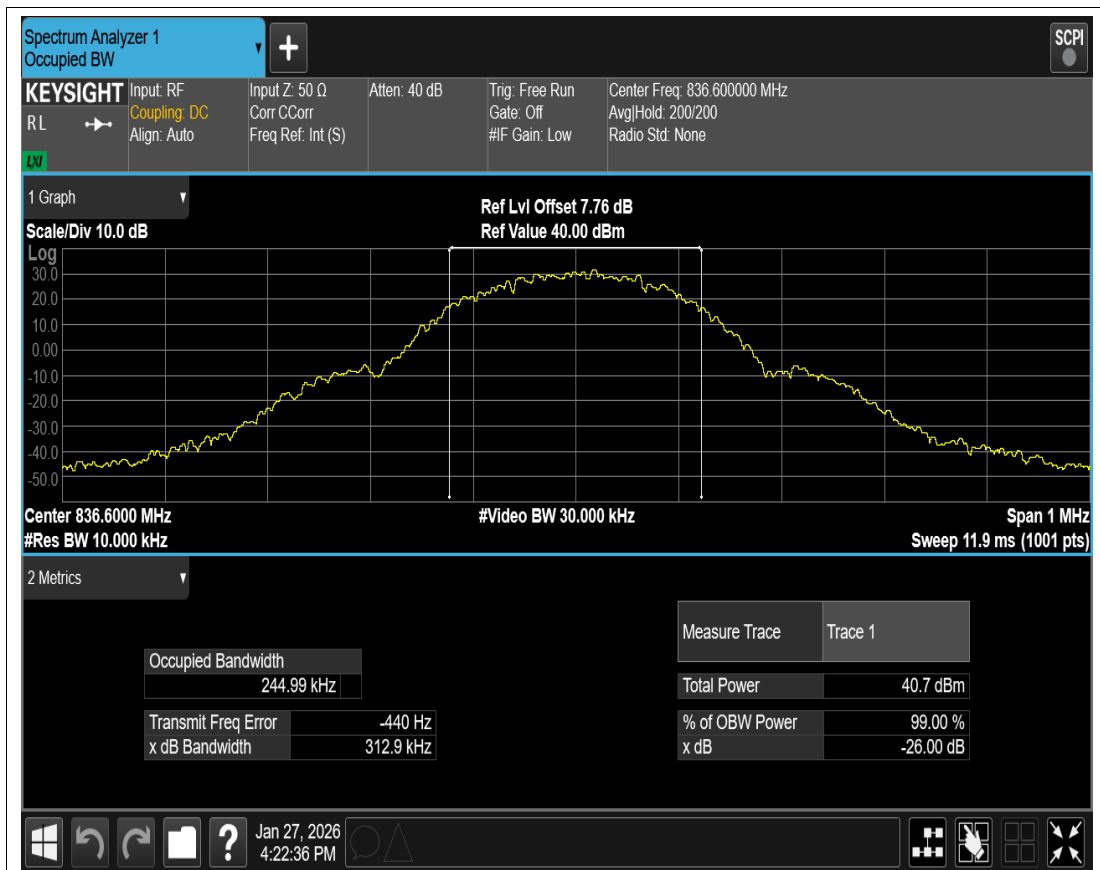


GPRS850 Channel=190

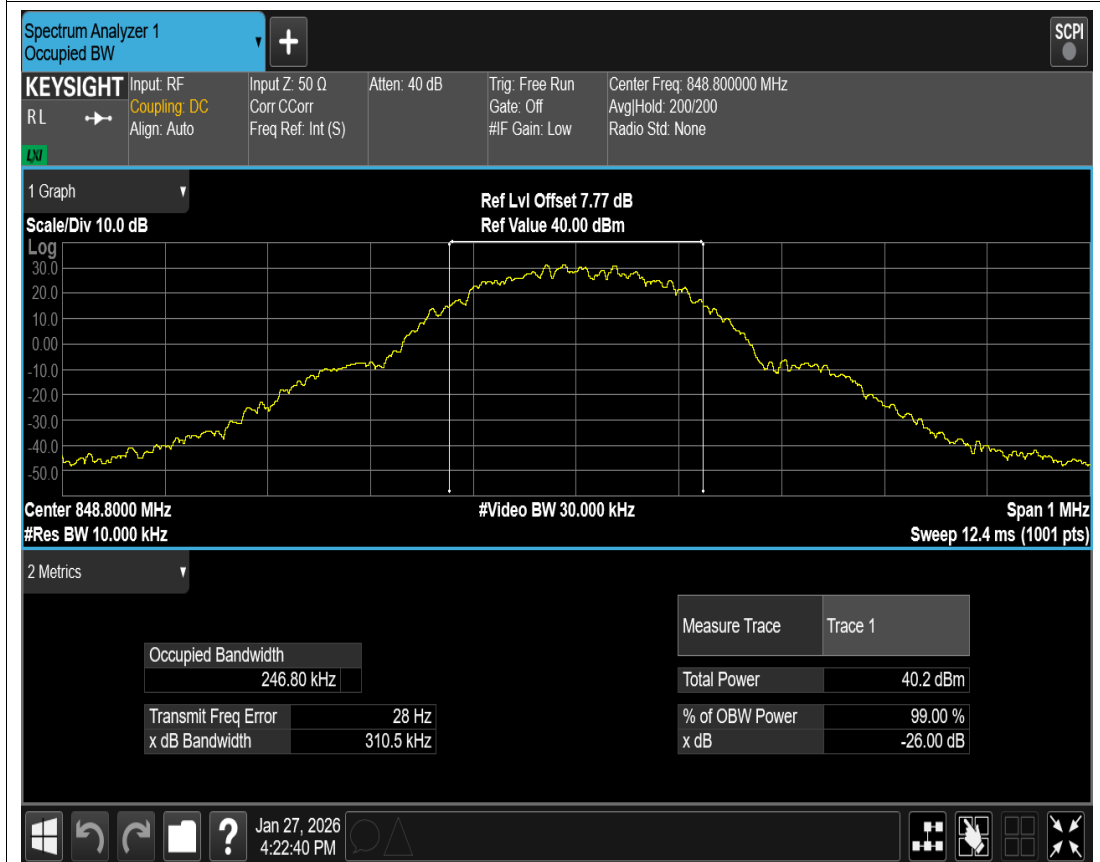


GPRS850 Channel=251

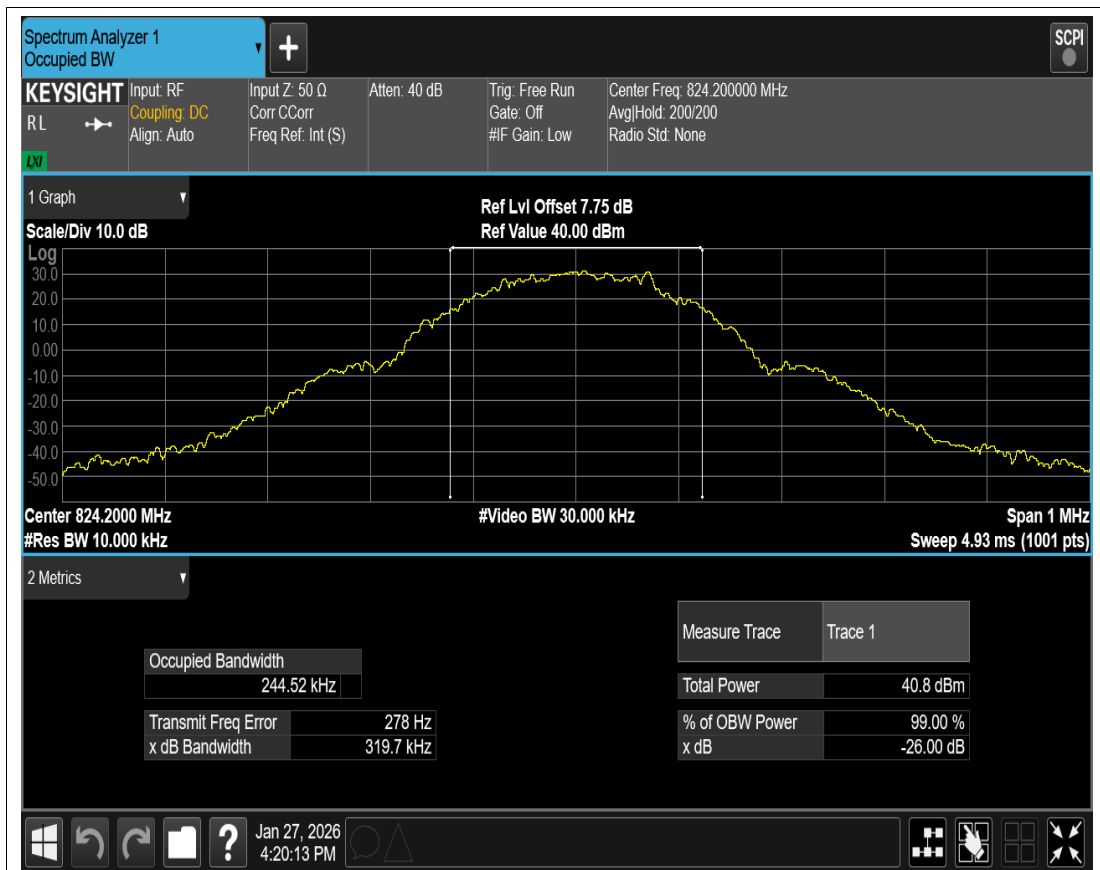


GSM850 Channel=128

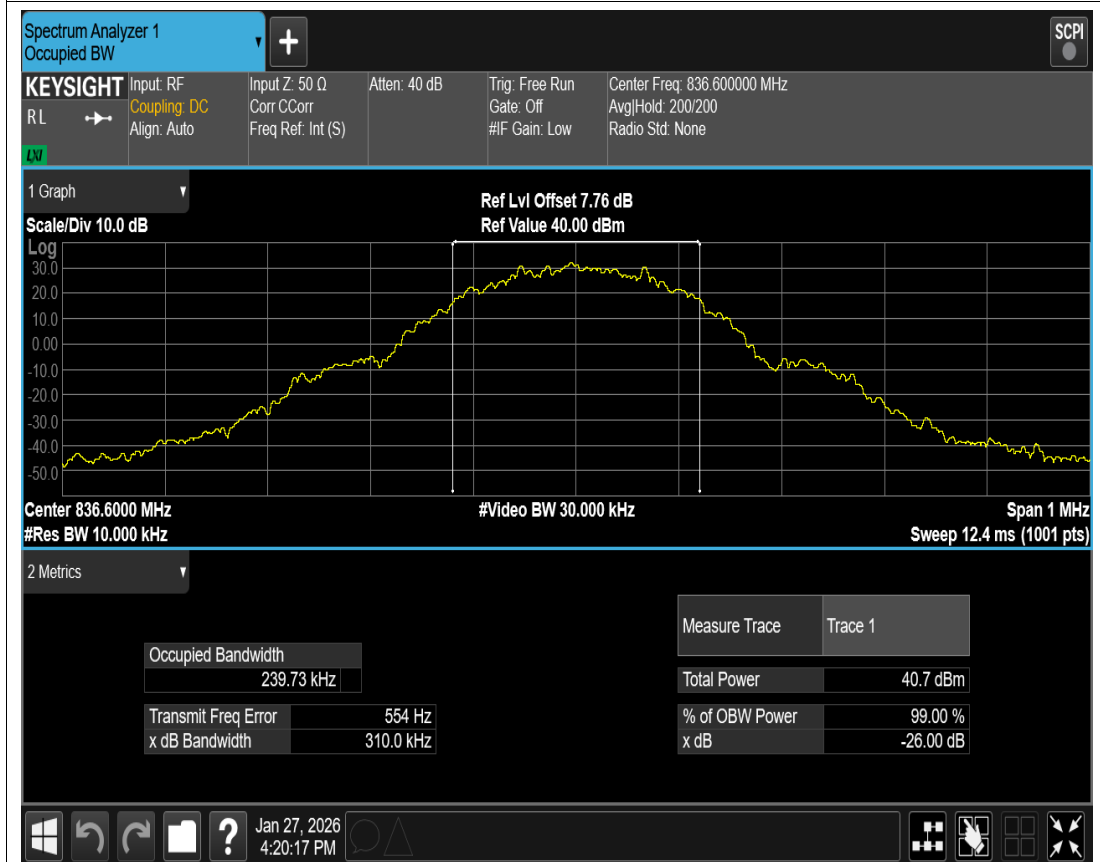

GSM850 Channel=190

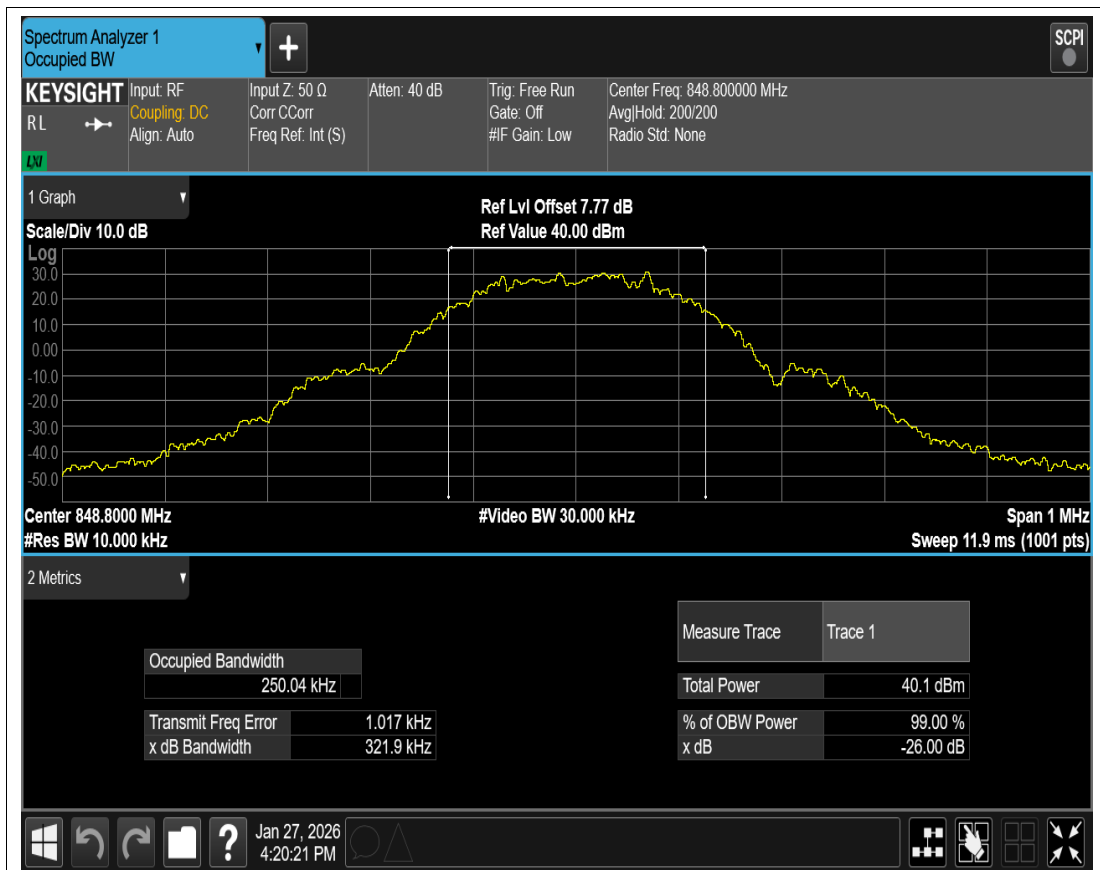


GSM850 Channel=251

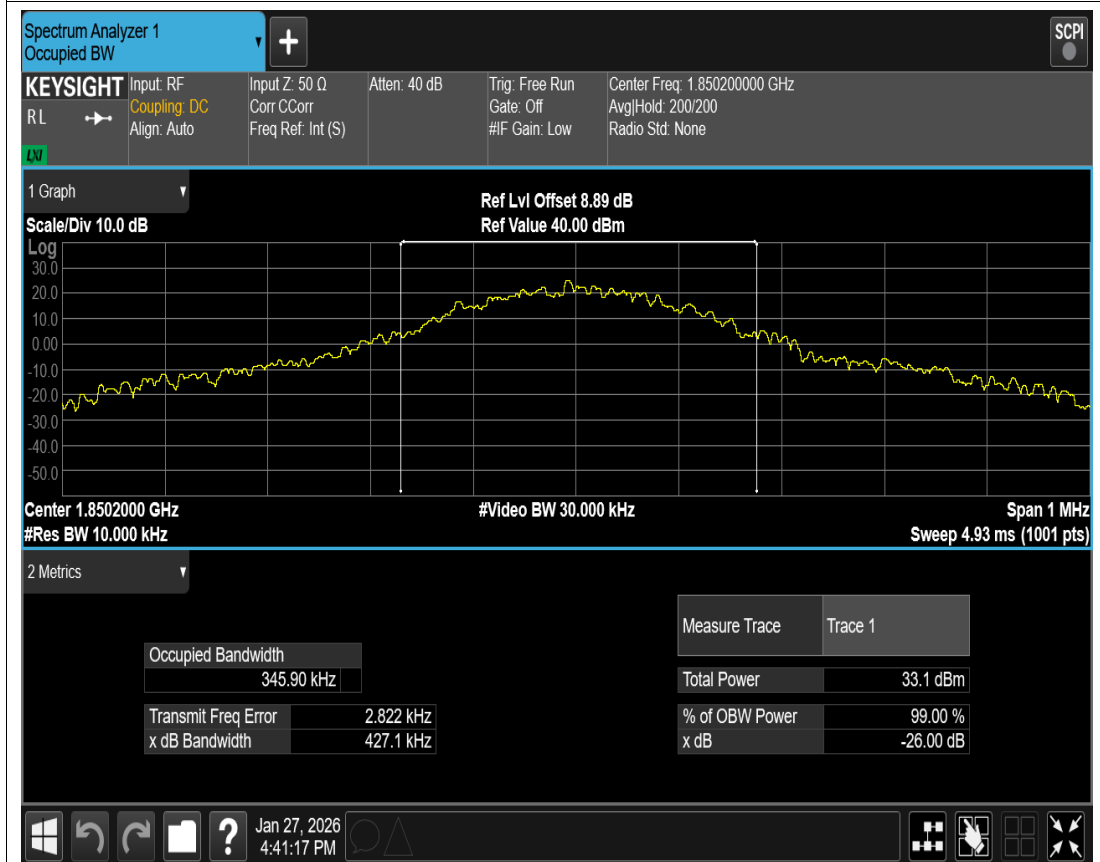


EGPRS1900 Channel=512




EGPRS1900 Channel=661

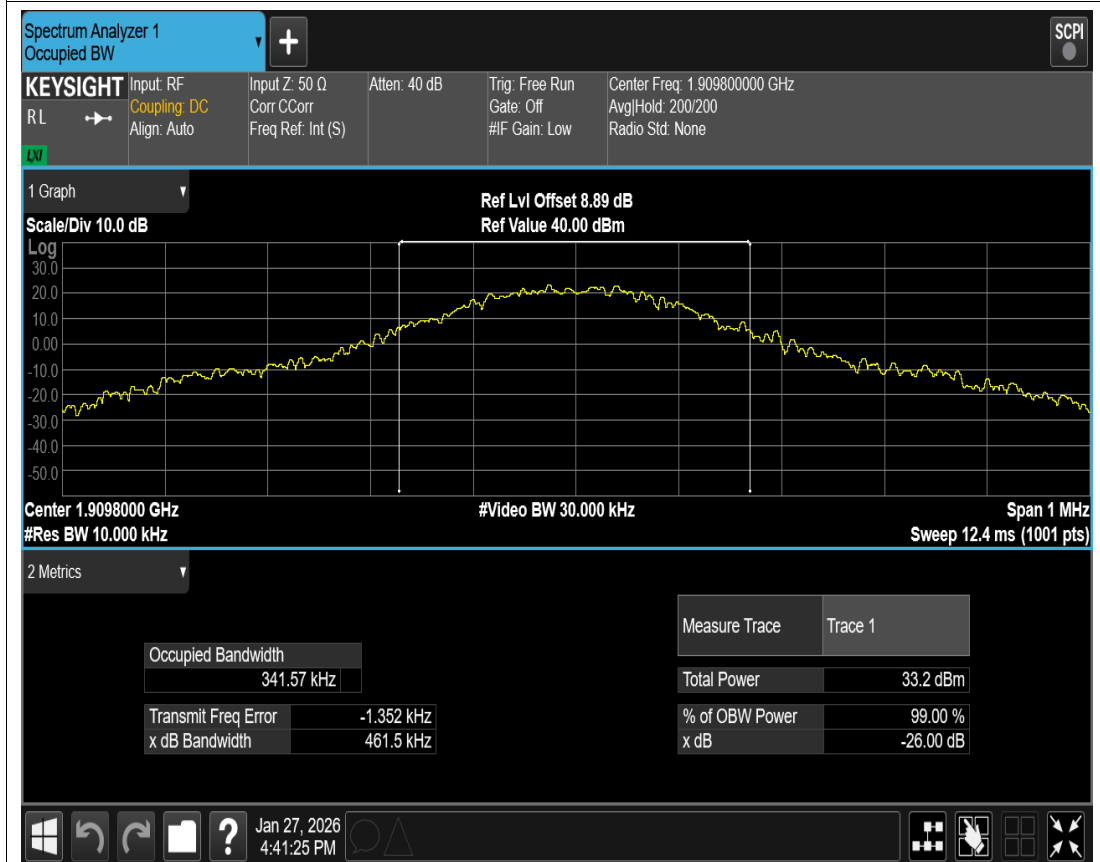


EGPRS1900 Channel=810

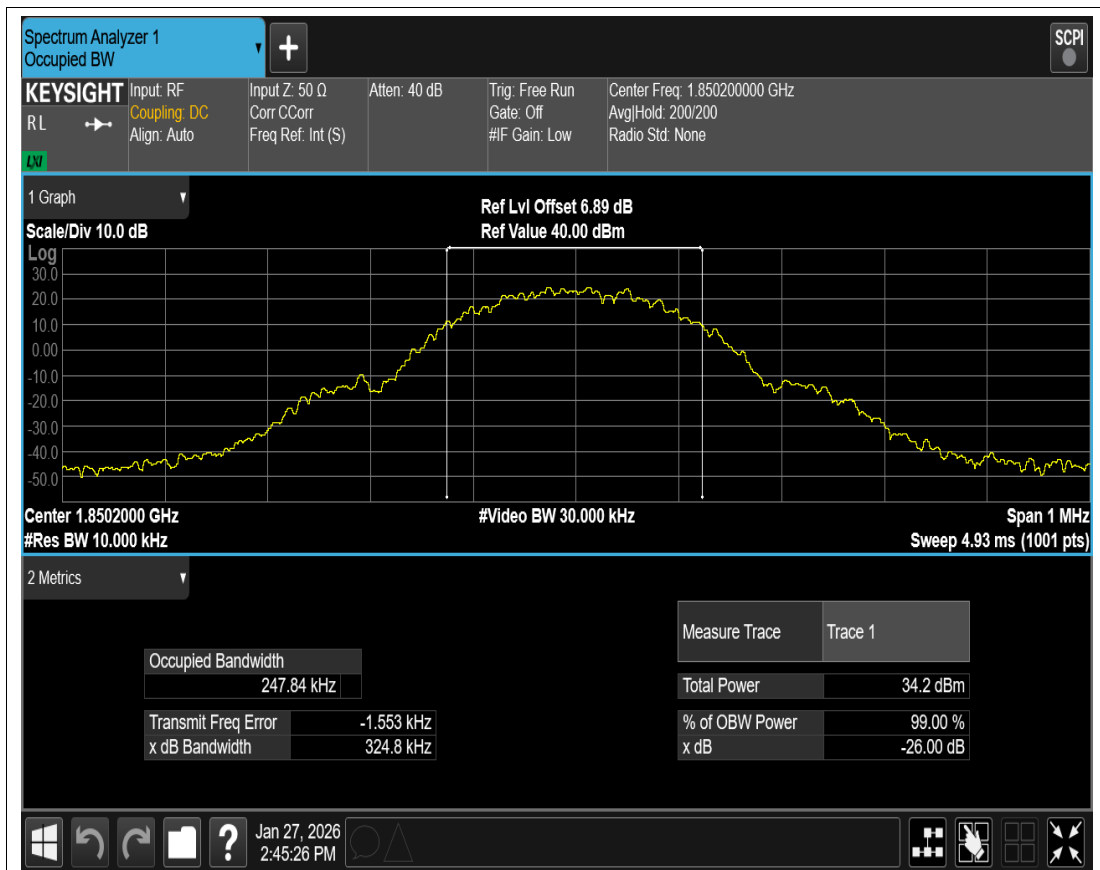


GPRS1900 Channel=512

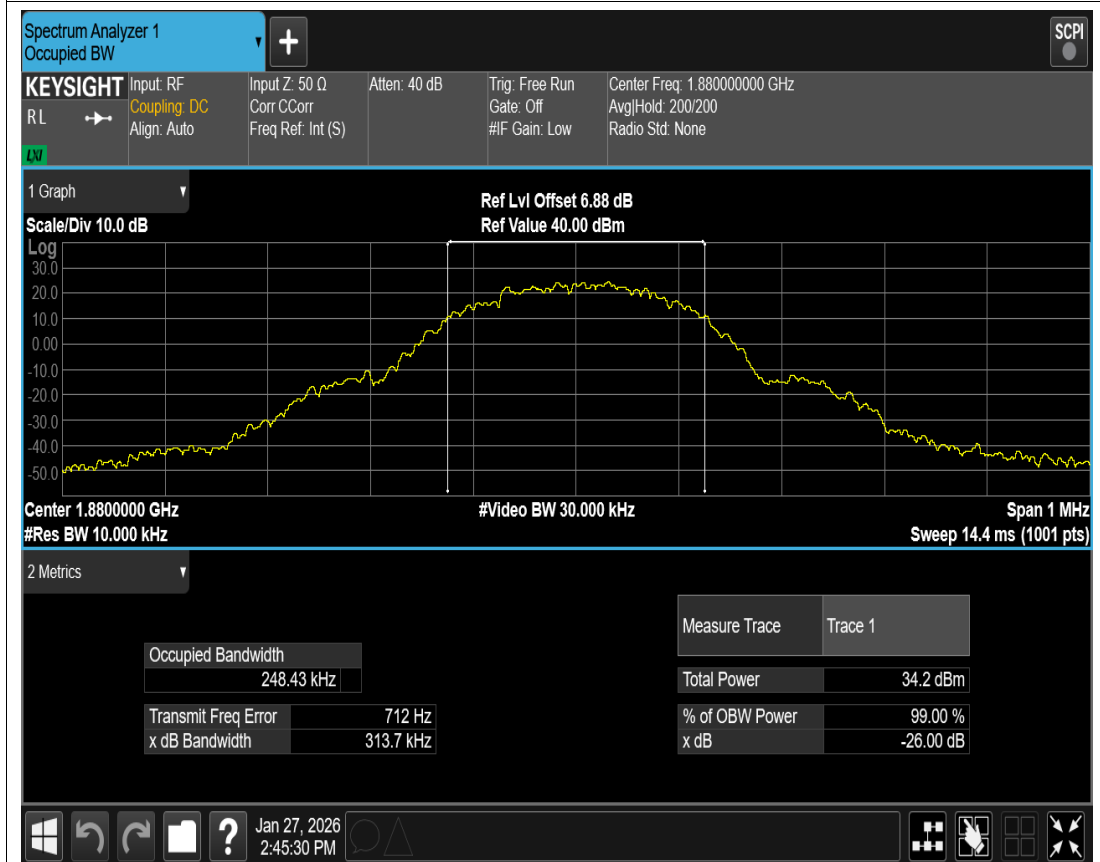


GPRS1900 Channel=661

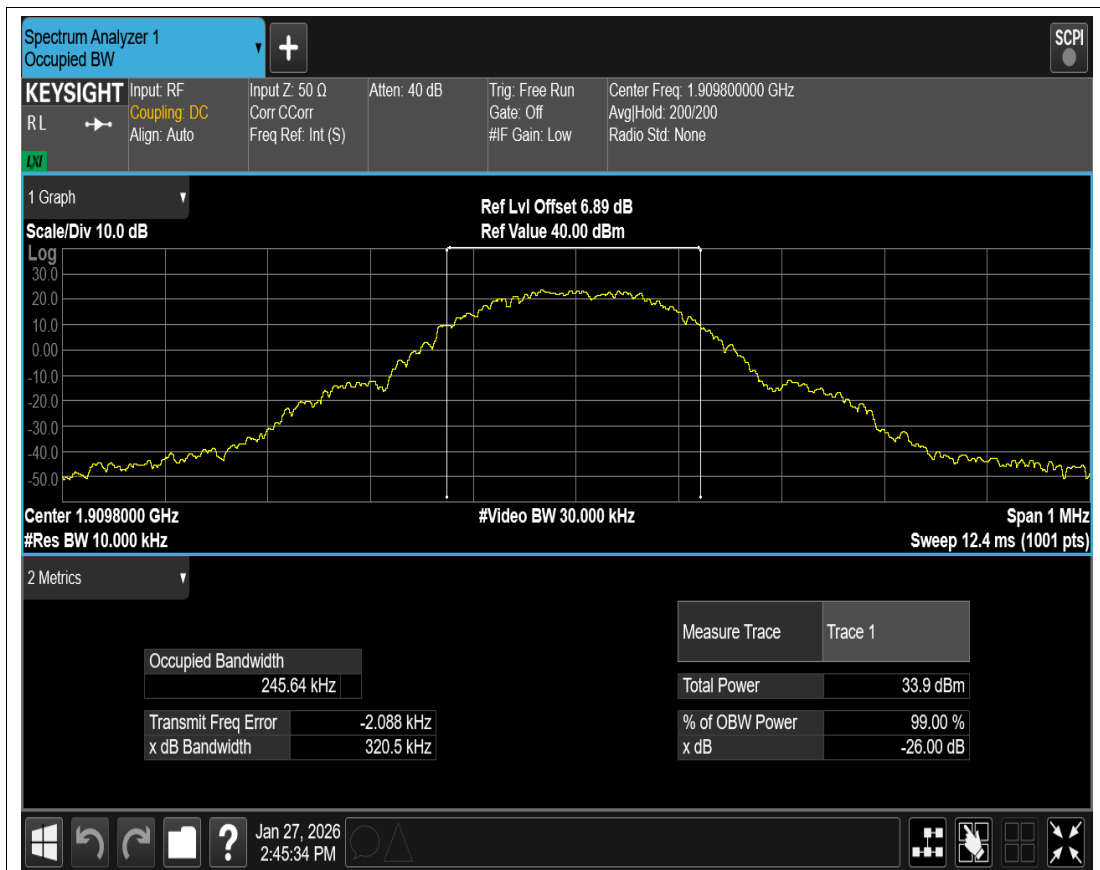


GPRS1900 Channel=810

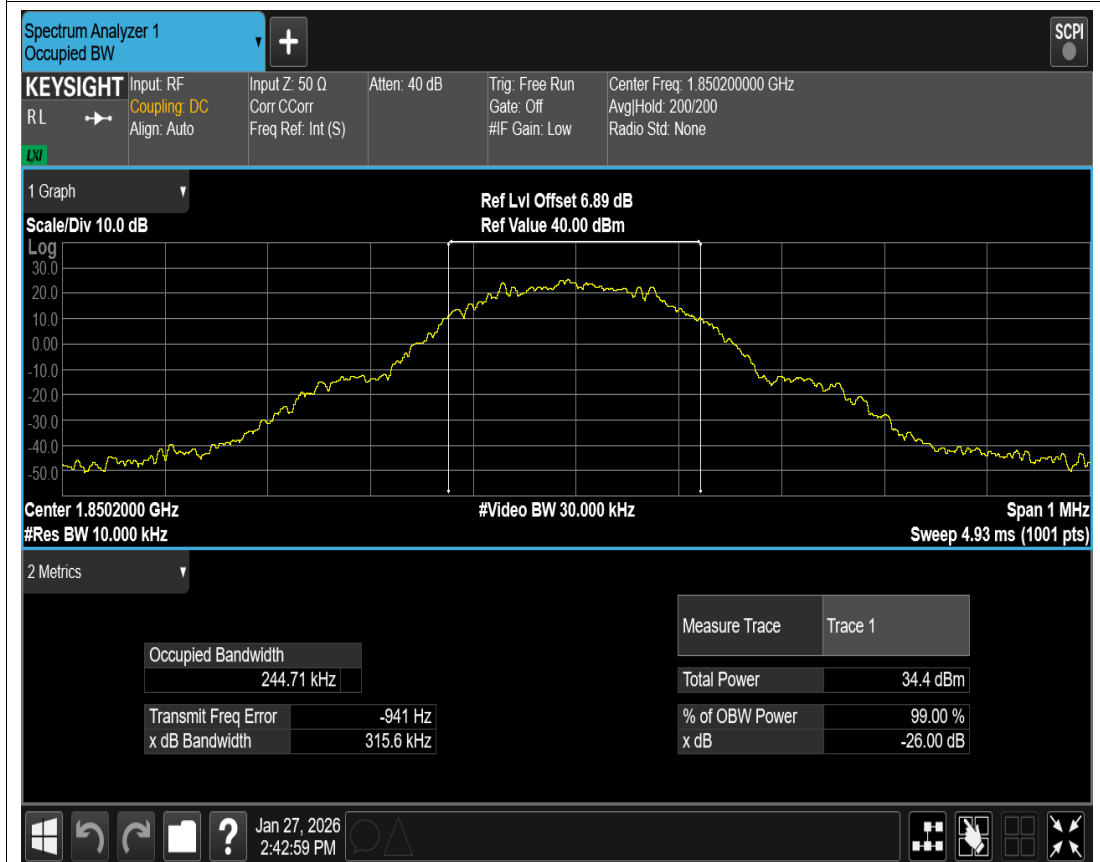

GSM1900 Channel=512

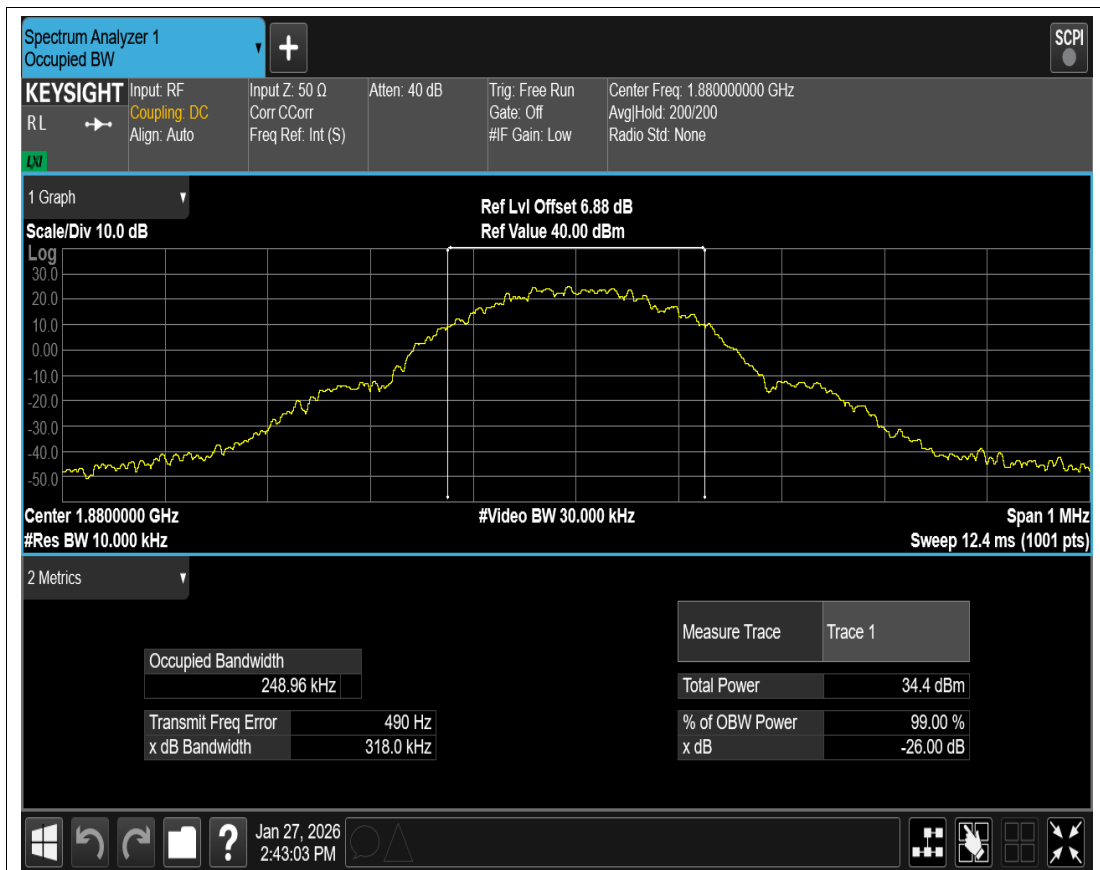


GSM1900 Channel=661

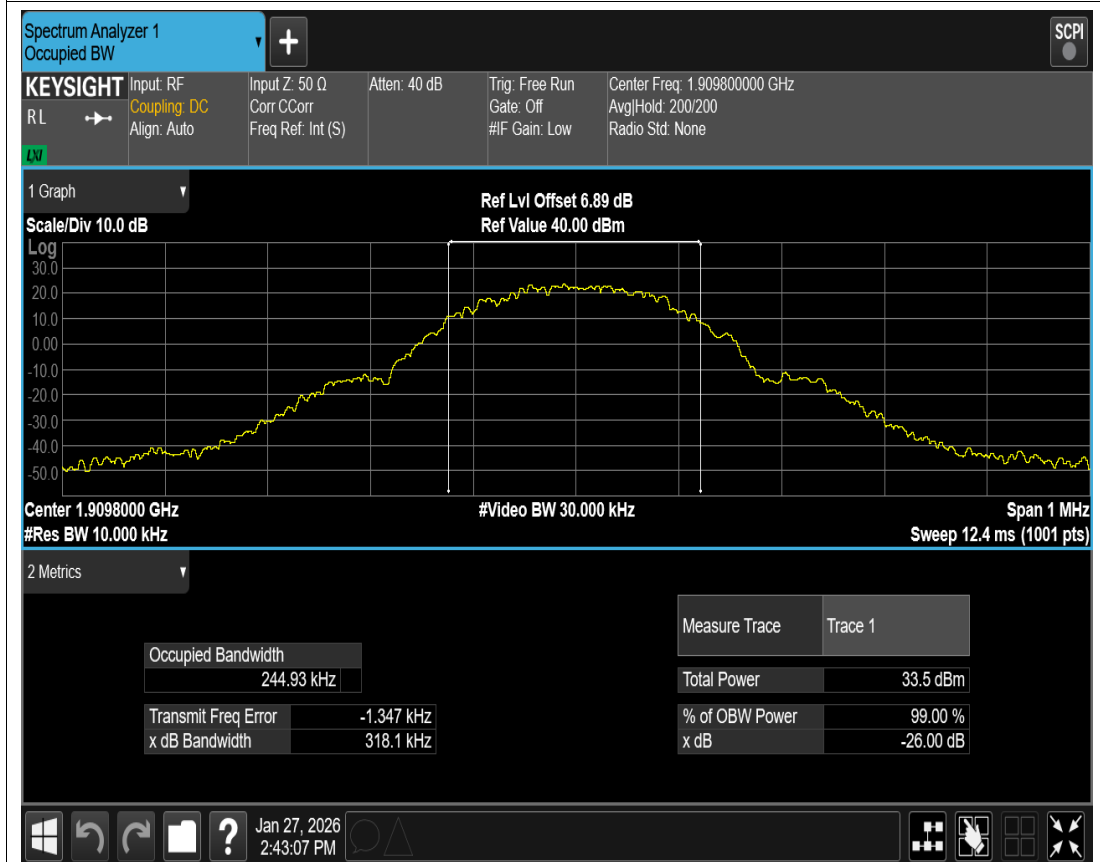


GSM1900 Channel=810

5. Band edge


<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Spur Freq (MHz)</i>	<i>Spur Level (dBm)</i>	<i>Limit (dBm)</i>	<i>Verdict</i>
EGPRS850	128	824.2	823.99	-32.92	-13	PASS
EGPRS850	251	848.8	849.00	-32.98	-13	PASS
GPRS850	128	824.2	823.98	-25.63	-13	PASS
GPRS850	251	848.8	849.03	-25.41	-13	PASS
GSM850	128	824.2	823.98	-25.18	-13	PASS
GSM850	251	848.8	849.02	-24.69	-13	PASS
EGPRS1900	512	1850.2	1849.98	-20.26	-13	PASS
EGPRS1900	810	1909.8	1910.01	-20.37	-13	PASS
GPRS1900	512	1850.2	1849.98	-31.04	-13	PASS
GPRS1900	810	1909.8	1910.02	-33.03	-13	PASS
GSM1900	512	1850.2	1849.99	-32.14	-13	PASS
GSM1900	810	1909.8	1910.02	-31.15	-13	PASS

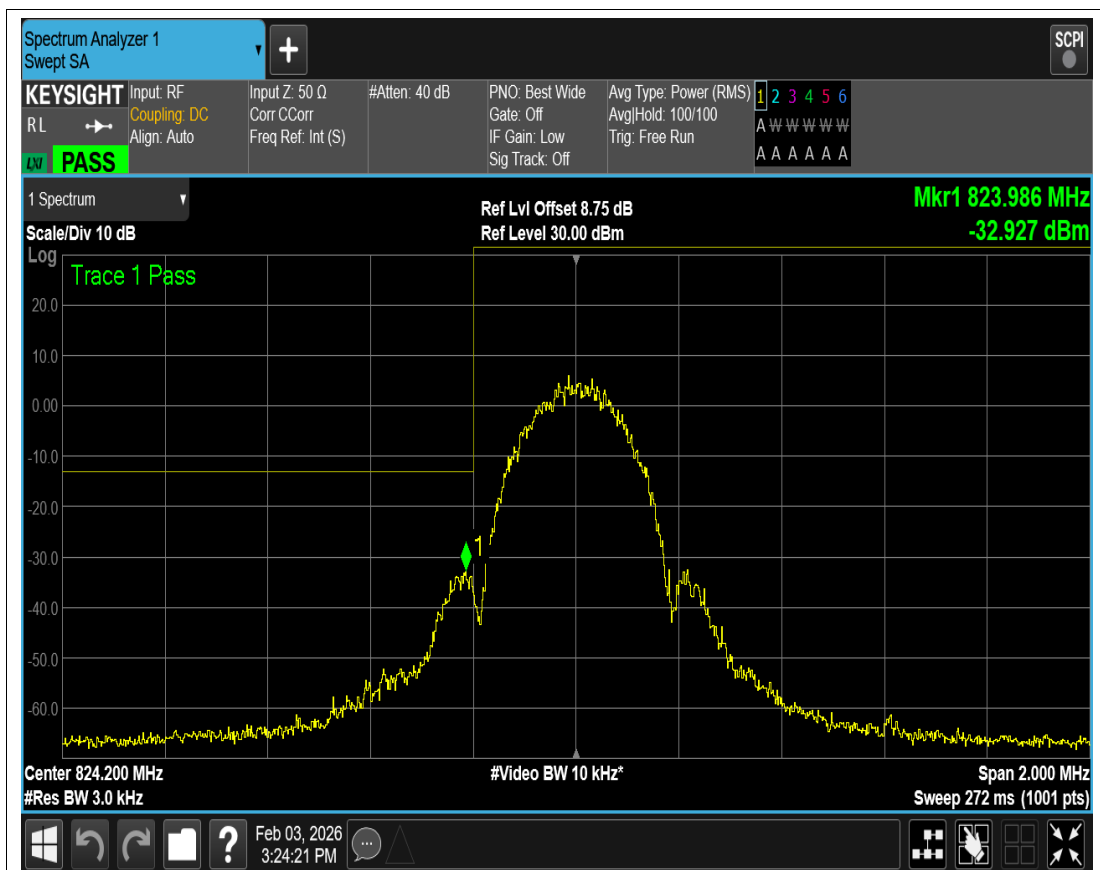


EGPRS850 Channel=128

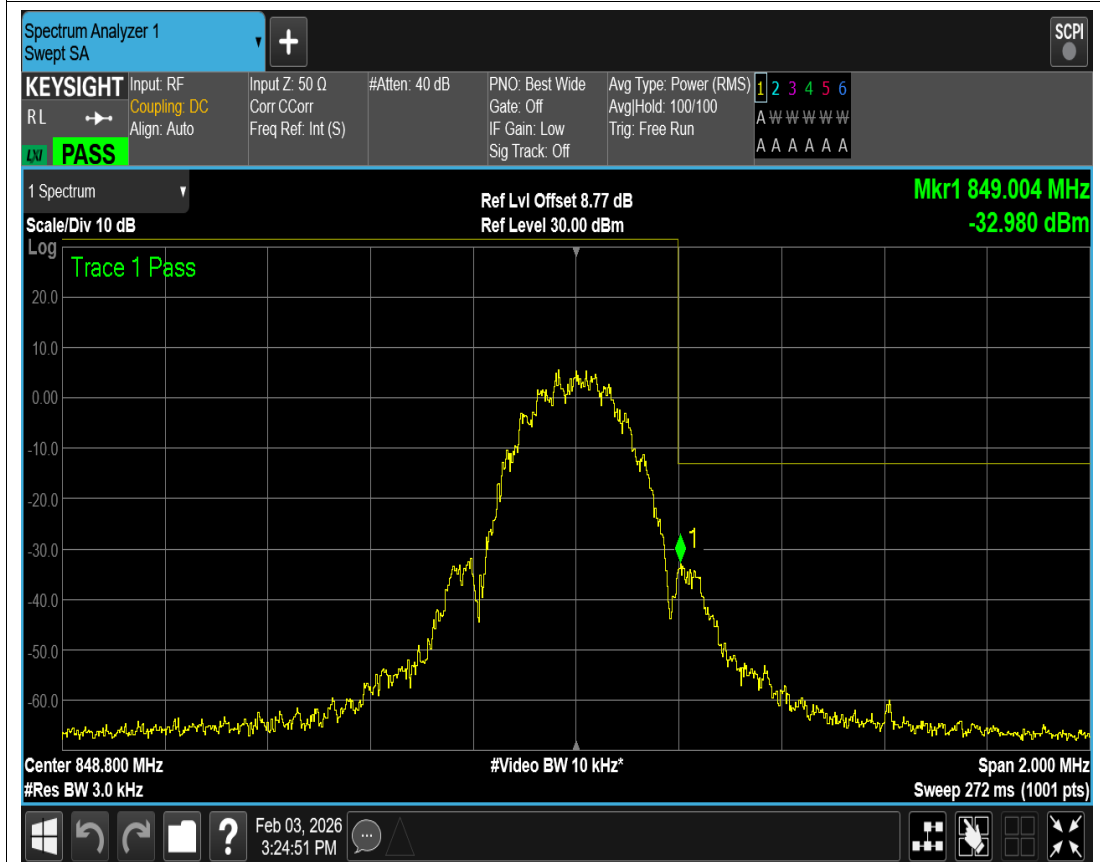


EGPRS850 Channel=251

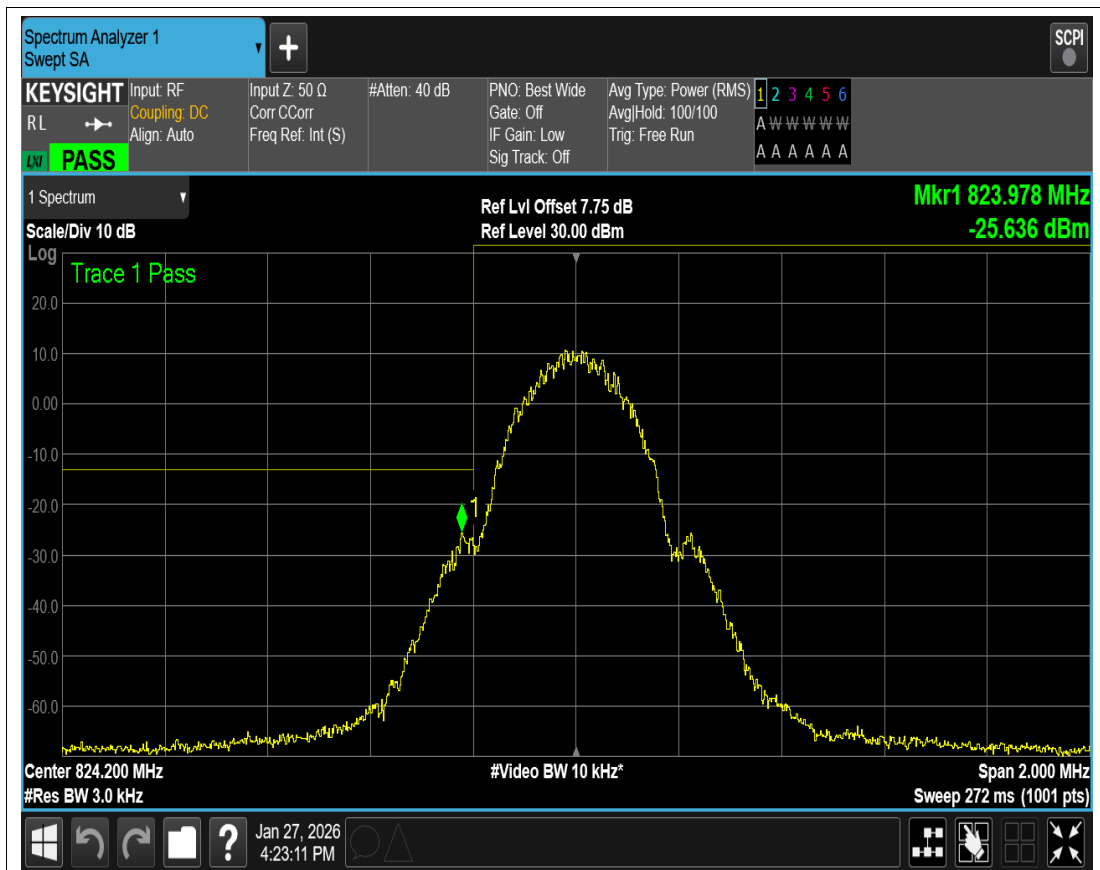


GPRS850 Channel=128

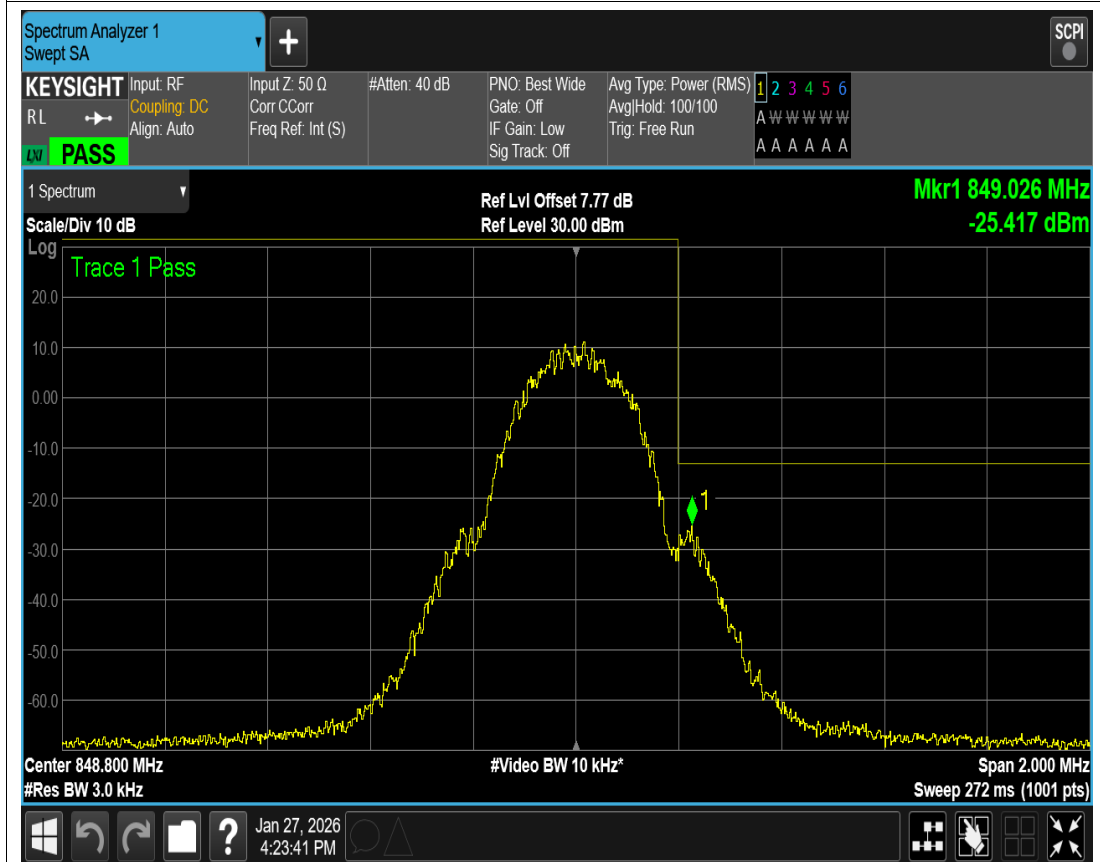


GPRS850 Channel=251

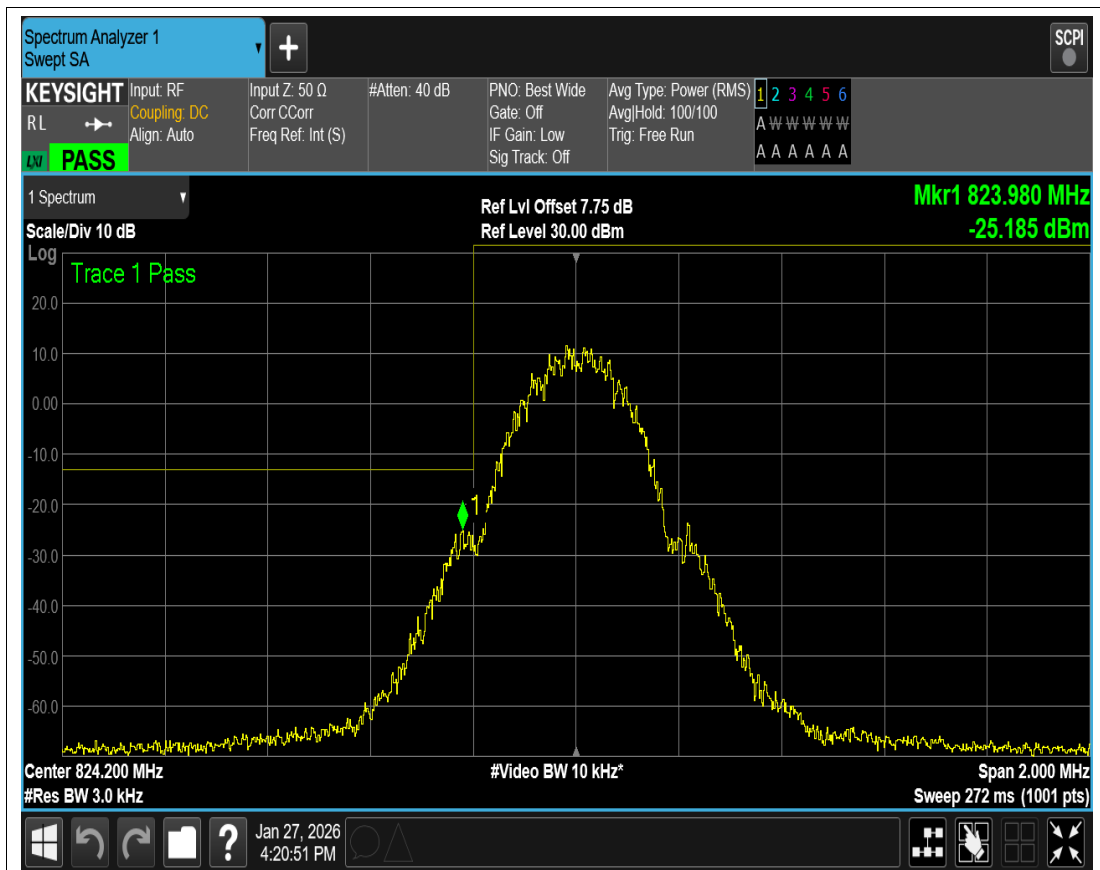


GSM850 Channel=128

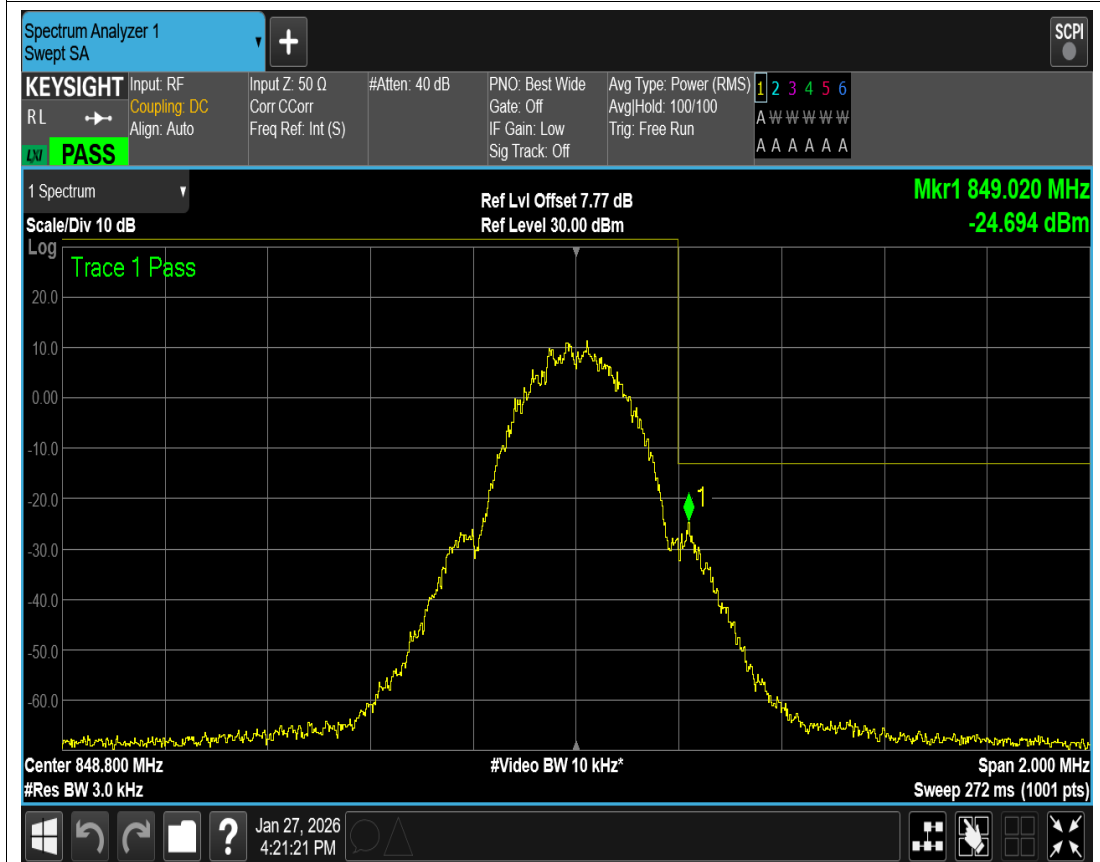


GSM850 Channel=251

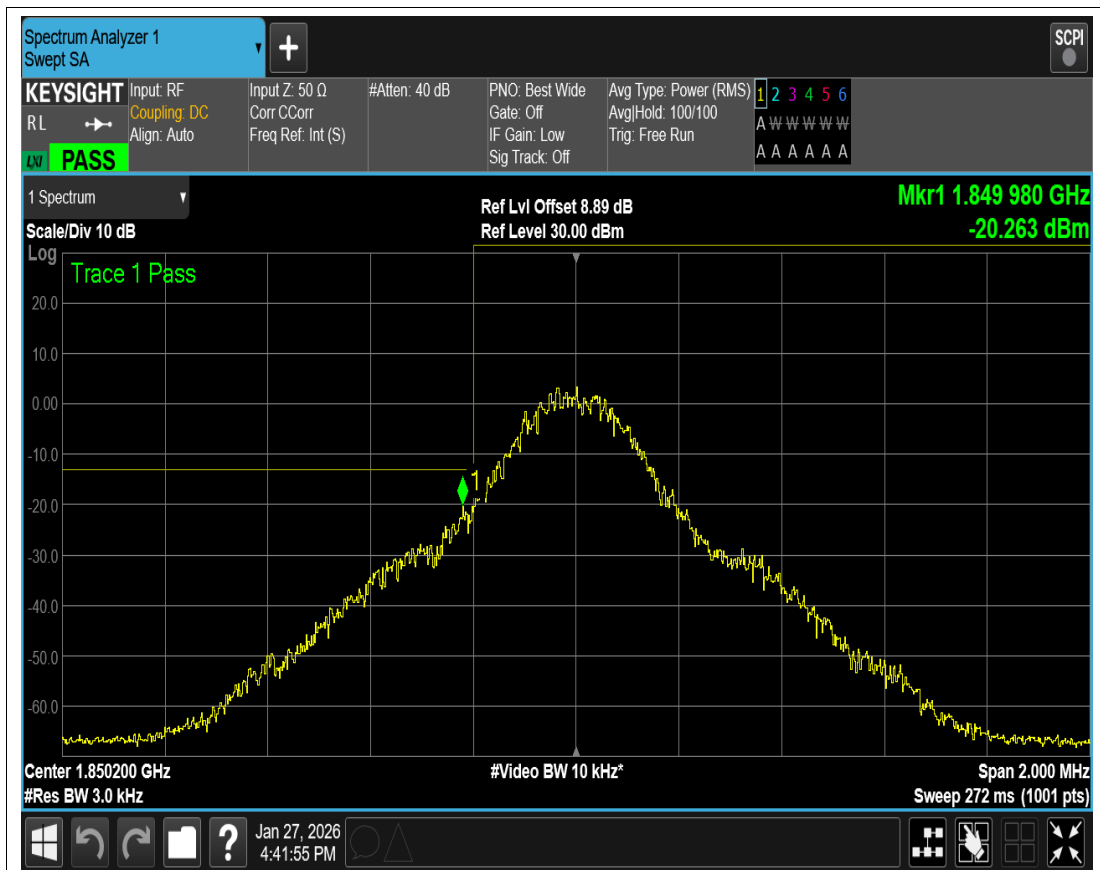


EGPRS1900 Channel=512

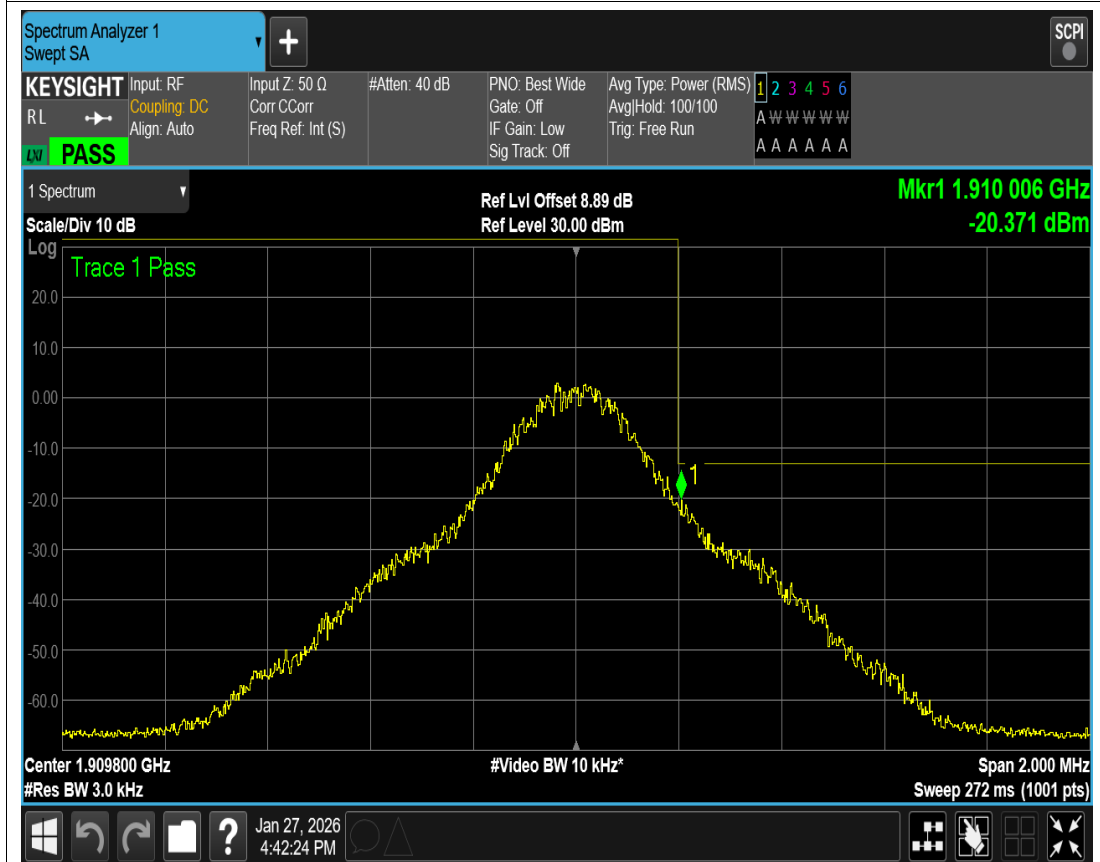


EGPRS1900 Channel=810

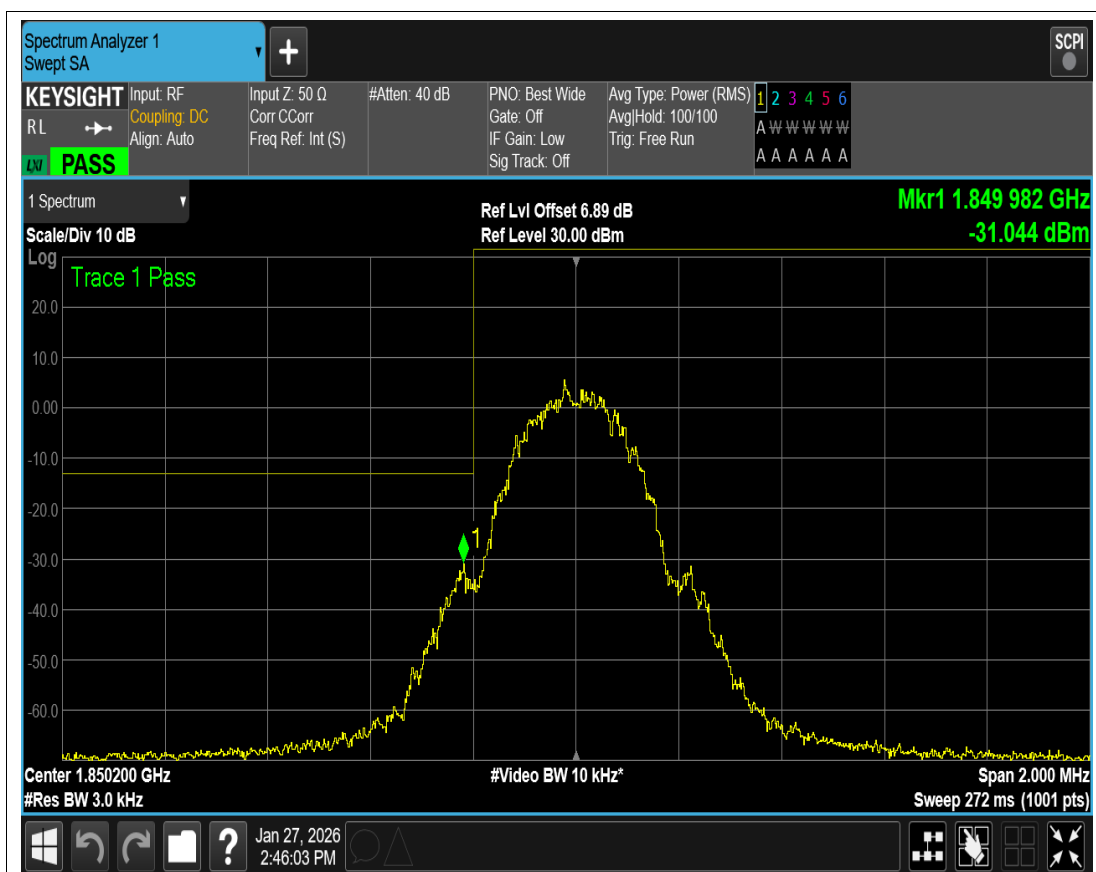


GPRS1900 Channel=512

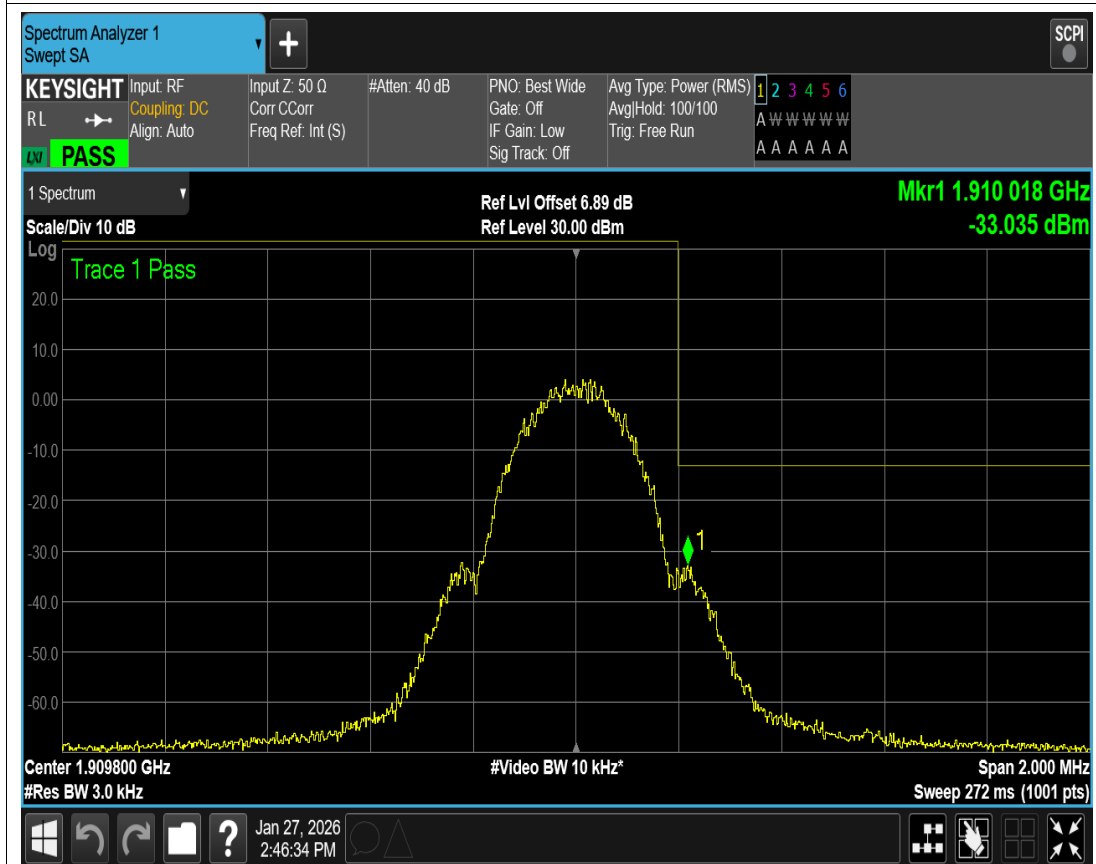

GPRS1900 Channel=810

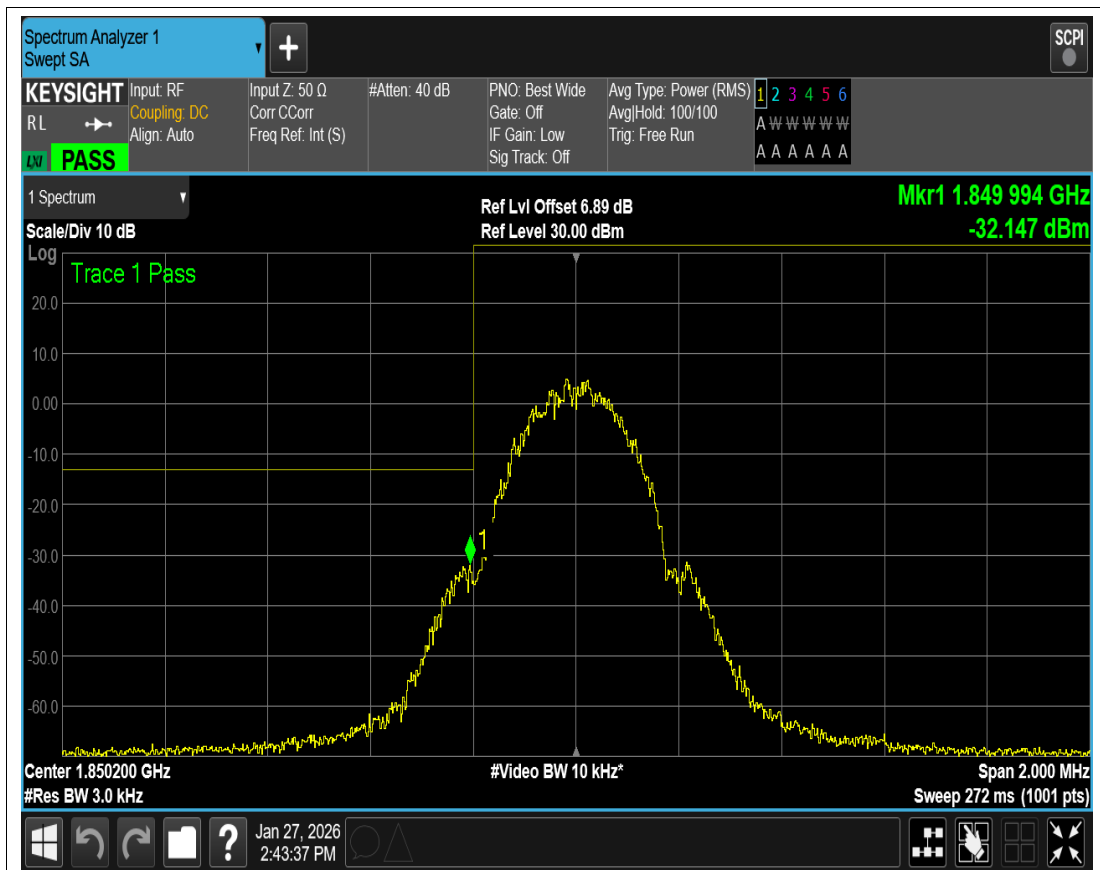


GSM1900 Channel=512

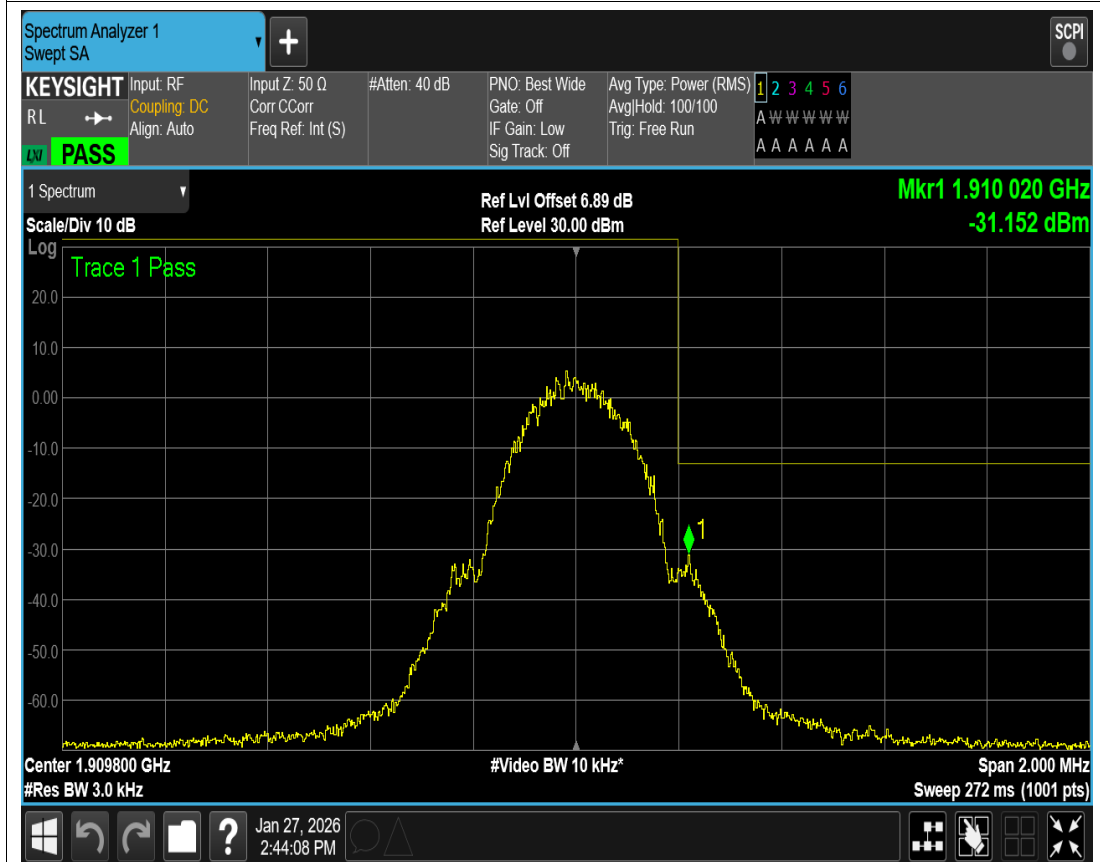


GSM1900 Channel=810

6.Out-of-band emissions


<i>Band</i>	<i>Channel</i>	<i>Frequency (MHz)</i>	<i>Spur Freq (MHz)</i>	<i>Spur Level (dBm)</i>	<i>Limit (dBm)</i>	<i>Verdict</i>
EGPRS850	128	824.2	3897.11	-25.53	-13	PASS
EGPRS850	190	836.6	3825.08	-25.09	-13	PASS
EGPRS850	251	848.8	3760.03	-25.59	-13	PASS
GPRS850	128	824.2	6421.52	-26.65	-13	PASS
GPRS850	190	836.6	3820.10	-27.53	-13	PASS
GPRS850	251	848.8	3859.48	-26.65	-13	PASS
GSM850	128	824.2	3887.14	-27.12	-13	PASS
GSM850	190	836.6	3885.65	-26.53	-13	PASS
GSM850	251	848.8	3694.22	-28.09	-13	PASS
EGPRS1900	512	1850.2	3751.91	-25.86	-13	PASS
EGPRS1900	661	1880	3904.68	-25.50	-13	PASS
EGPRS1900	810	1909.8	3848.76	-26.05	-13	PASS
GPRS1900	512	1850.2	18697.46	-27.48	-13	PASS
GPRS1900	661	1880	3914.17	-28.00	-13	PASS
GPRS1900	810	1909.8	3829.79	-28.21	-13	PASS
GSM1900	512	1850.2	3719.46	-27.49	-13	PASS
GSM1900	661	1880	3908.17	-28.18	-13	PASS
GSM1900	810	1909.8	3868.73	-28.00	-13	PASS

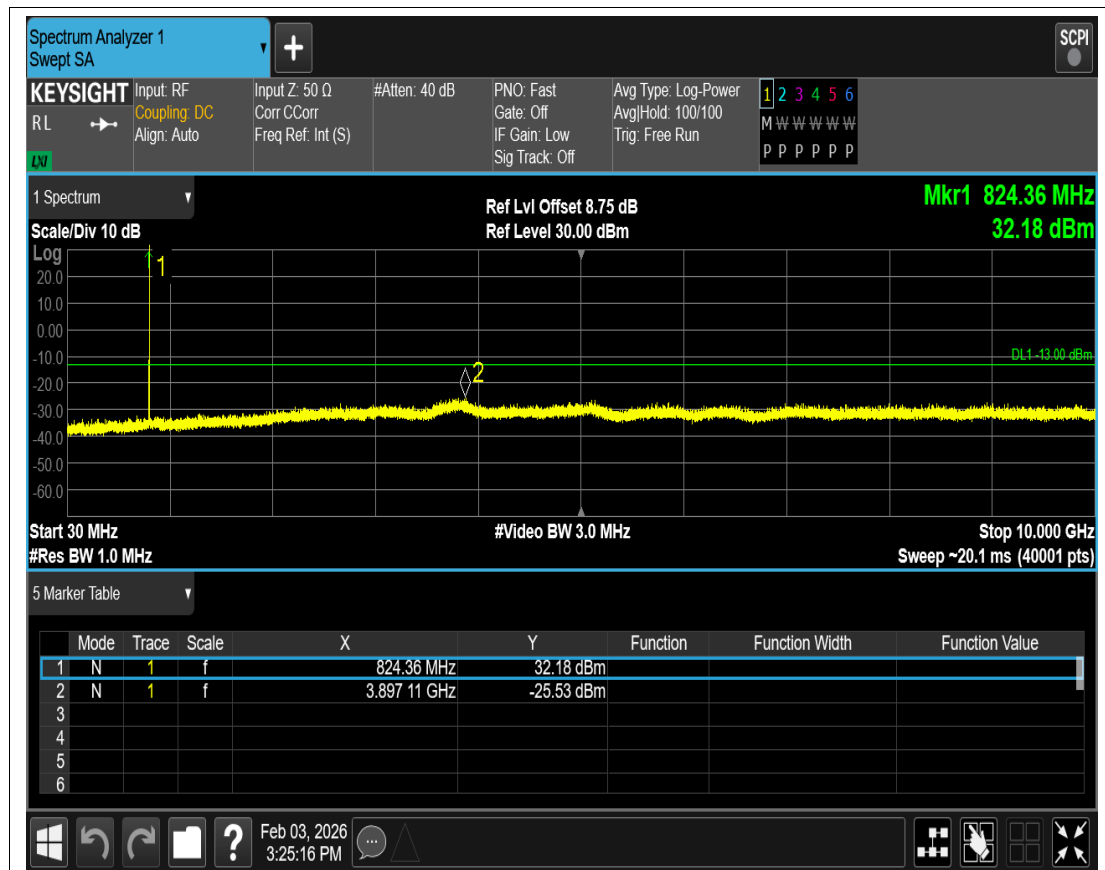


EGPRS850 Channel=128

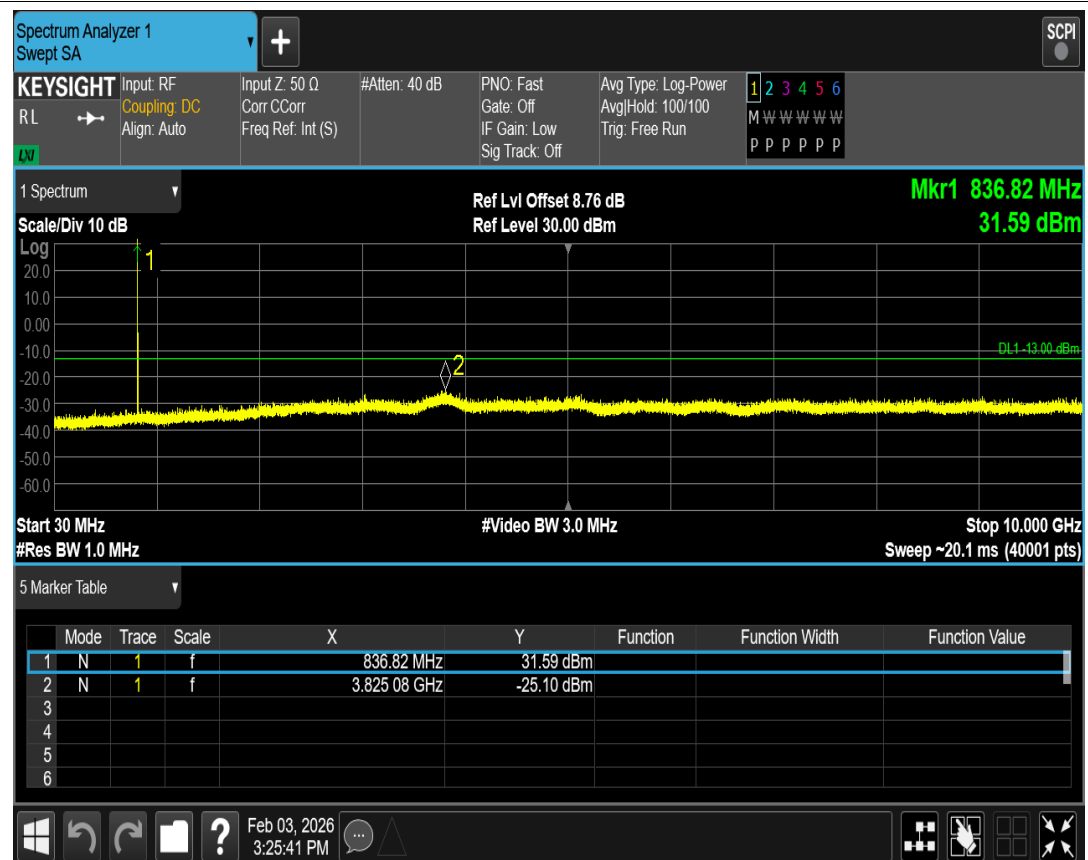


EGPRS850 Channel=190

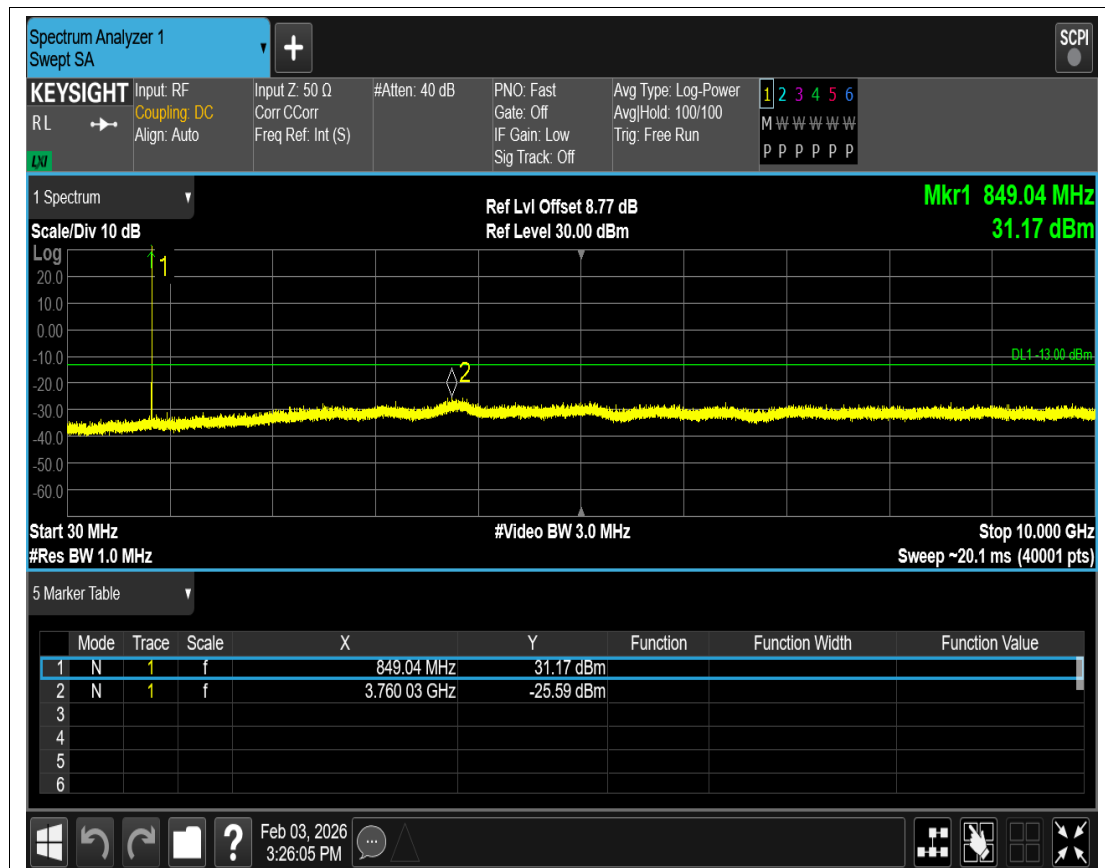


EGPRS850 Channel=251

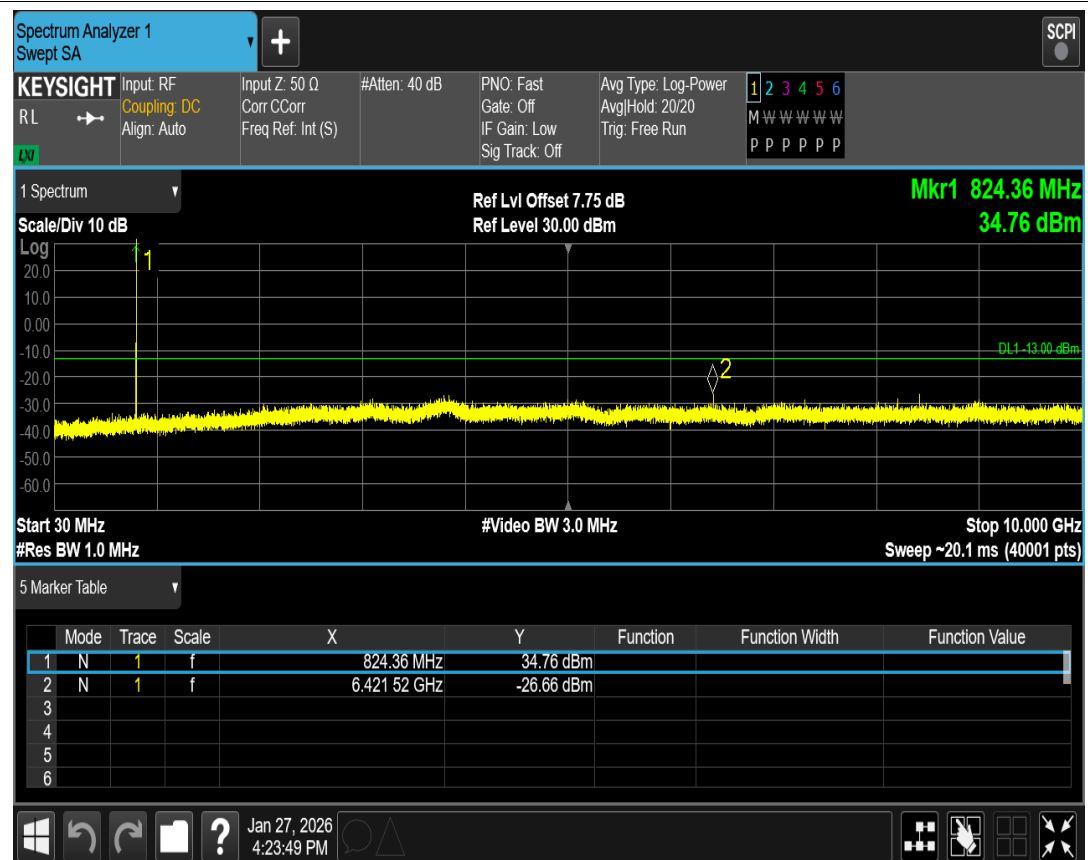

GPRS850 Channel=128

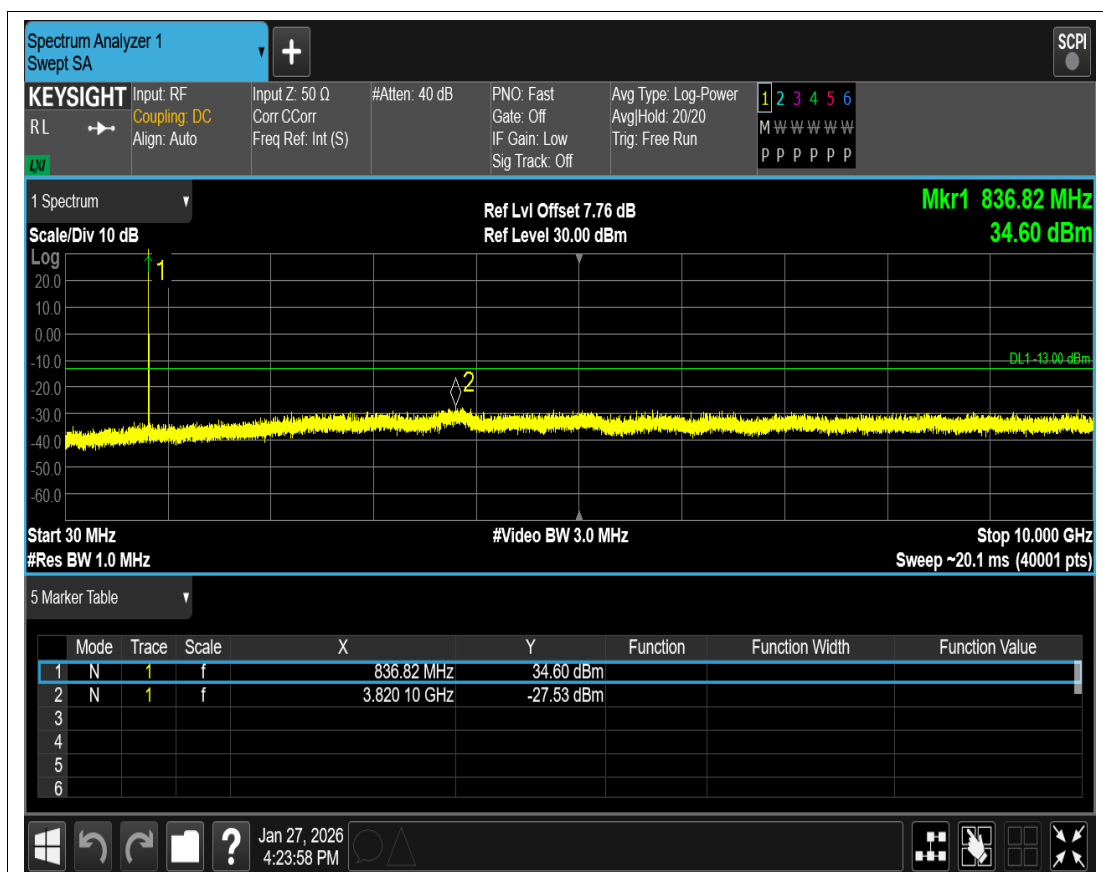


GPRS850 Channel=190

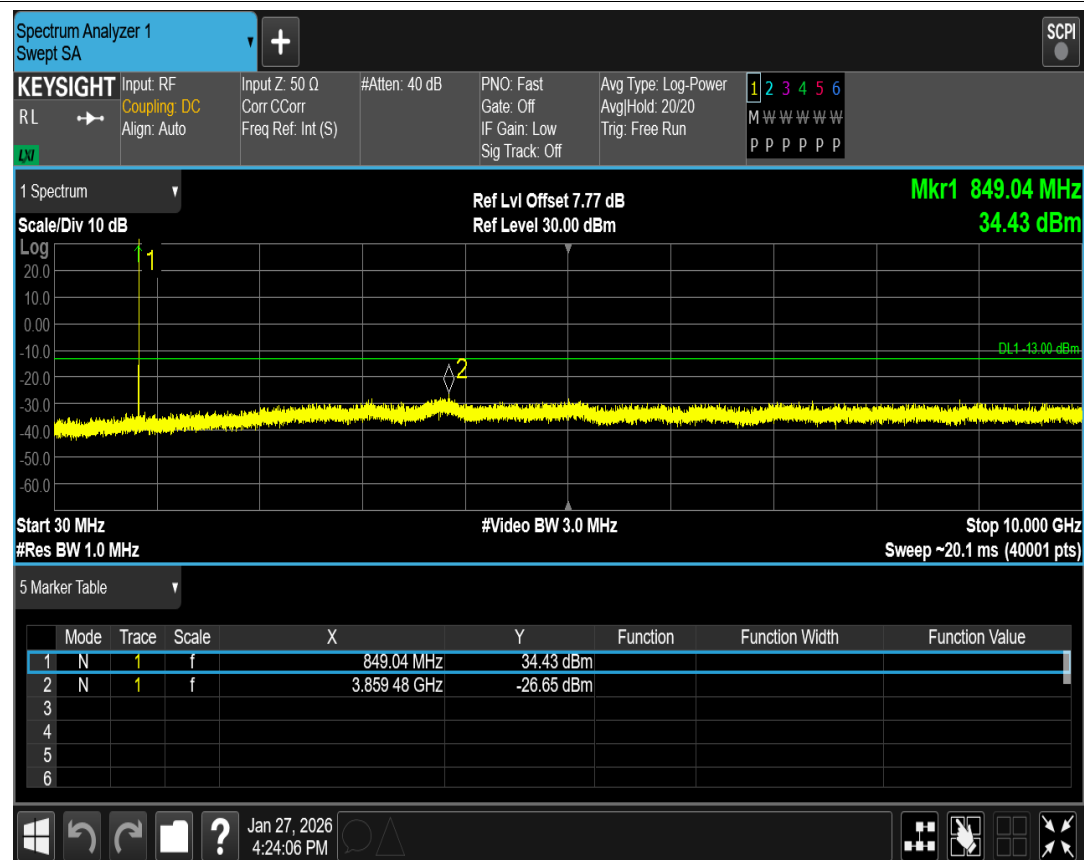

GPRS850 Channel=251




GSM850 Channel=128

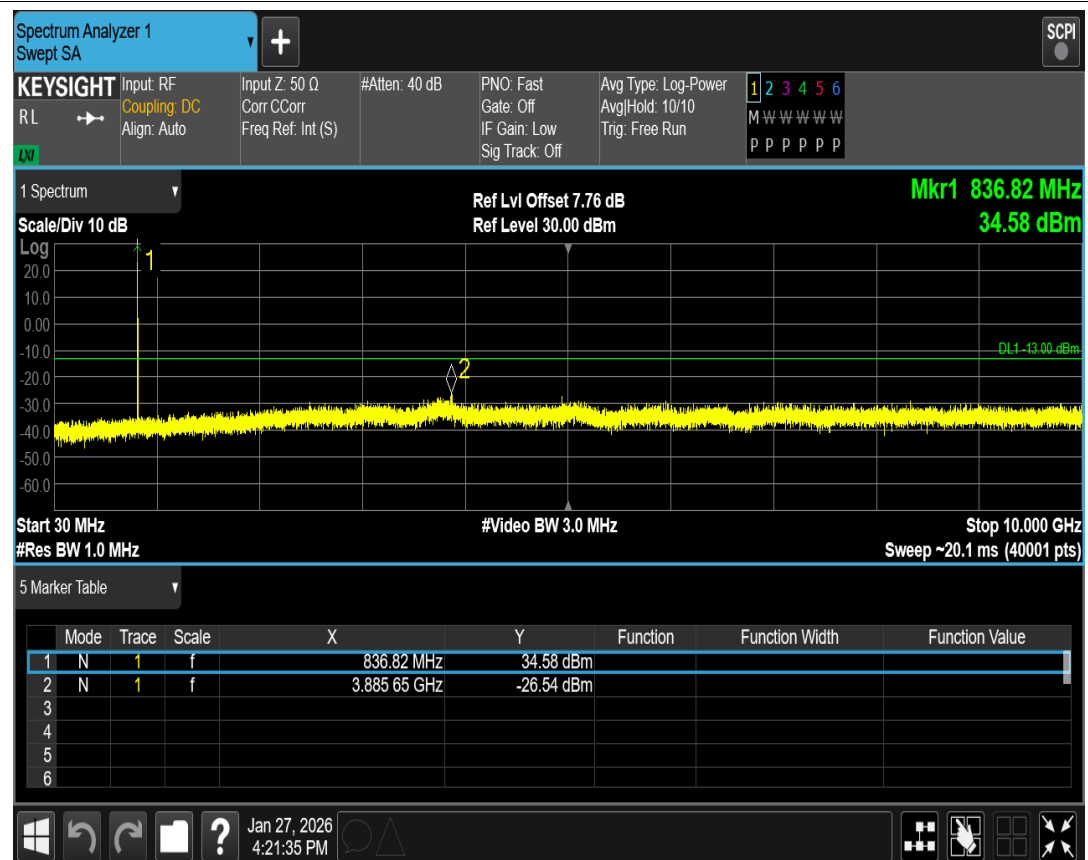


GSM850 Channel=190




GSM850 Channel=251

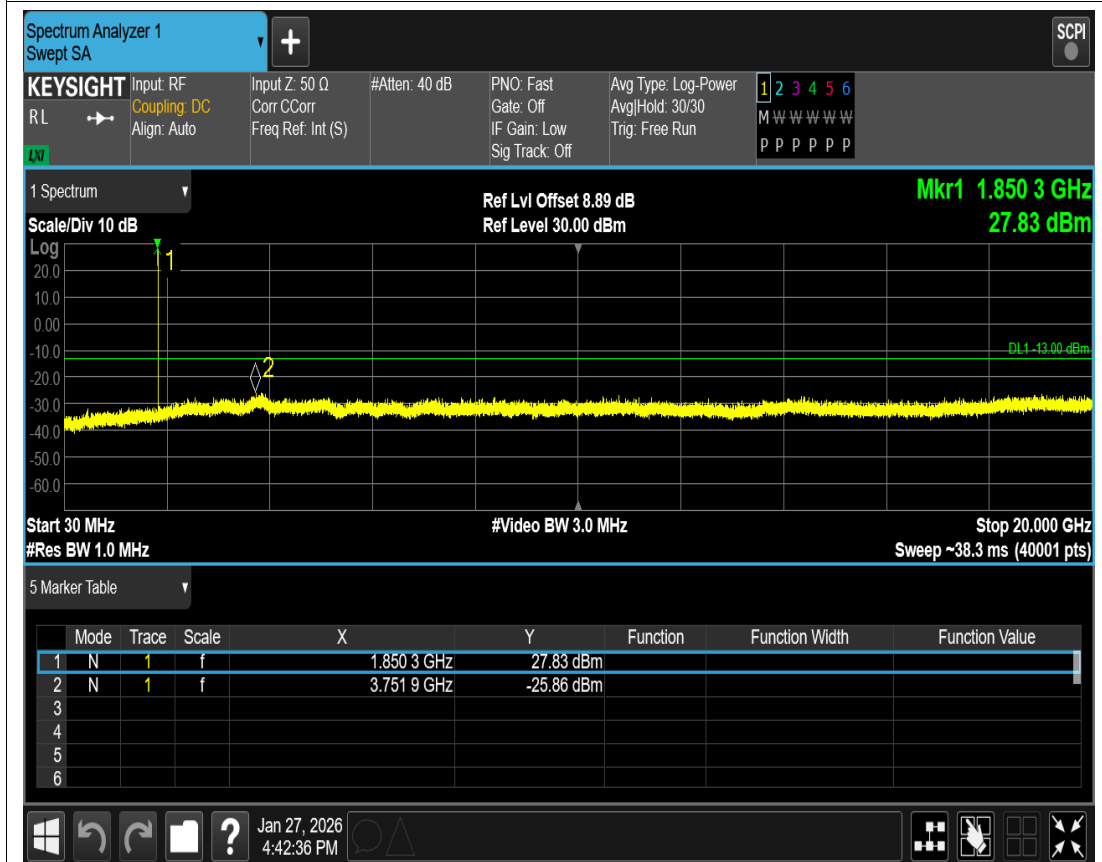


EGPRS1900 Channel=512

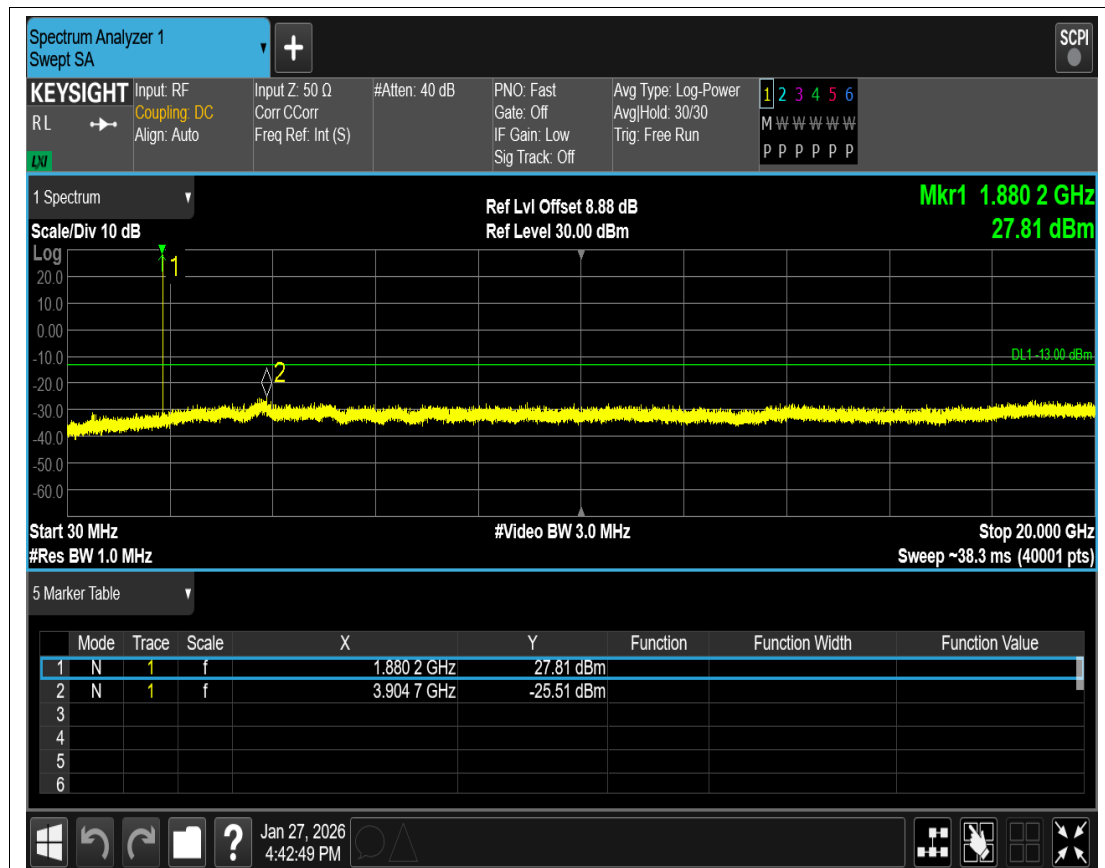


EGPRS1900 Channel=661

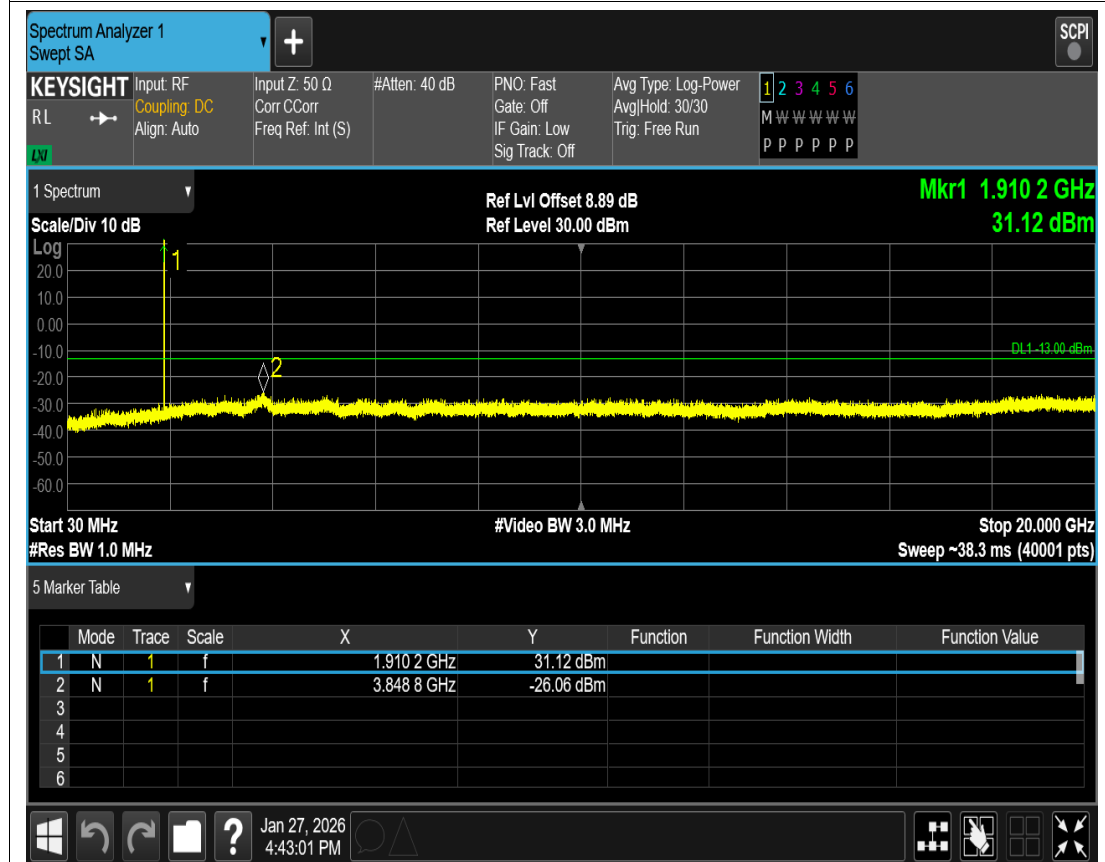


EGPRS1900 Channel=810

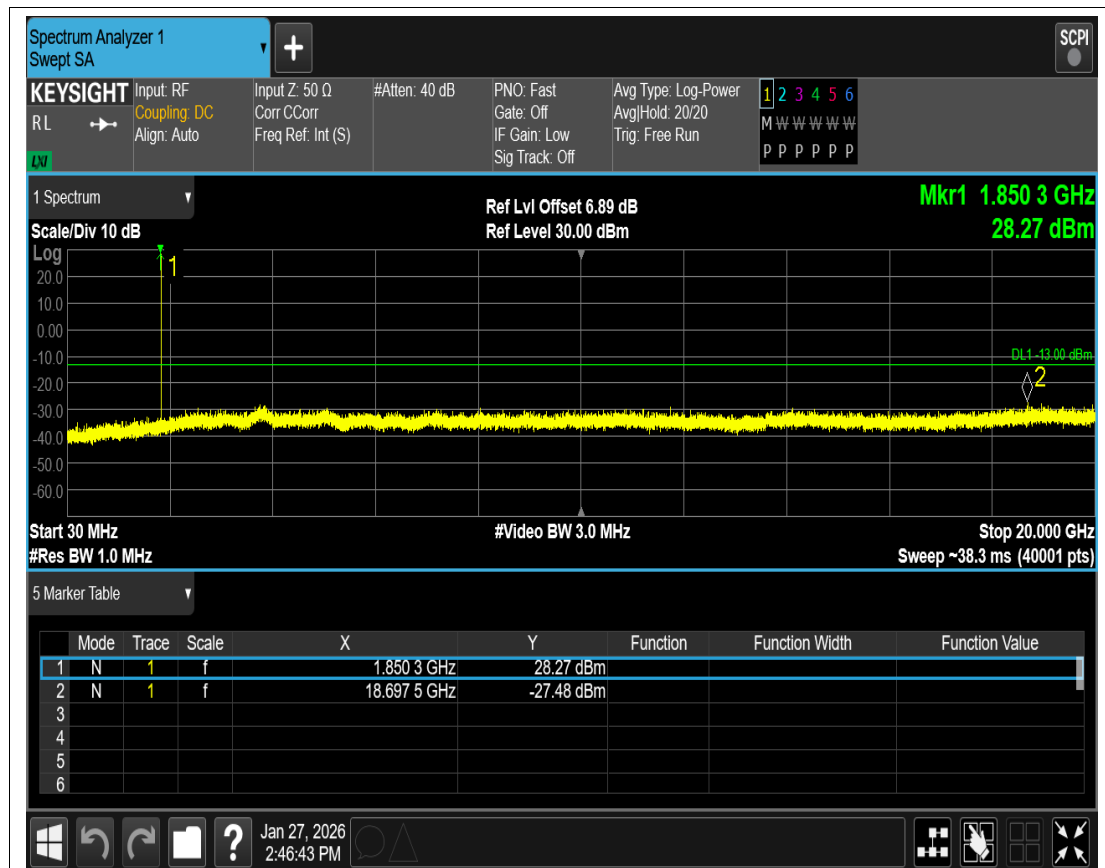


GPRS1900 Channel=512

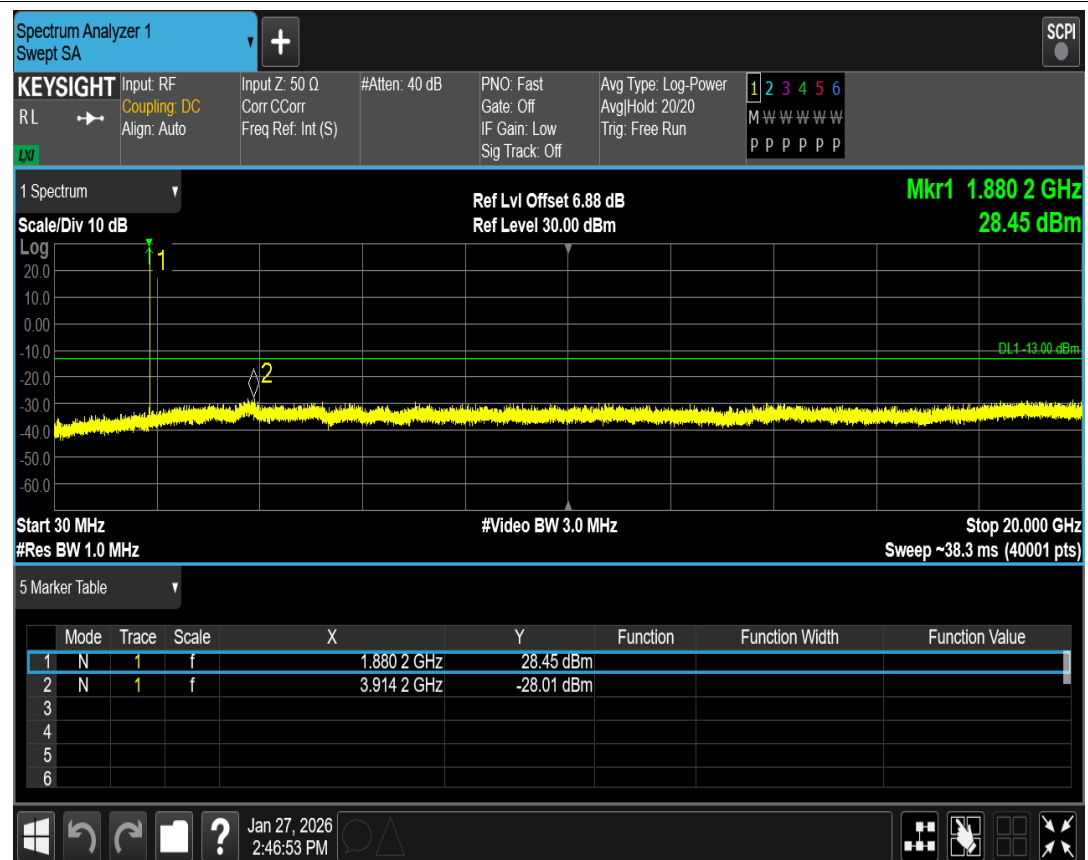


GPRS1900 Channel=661

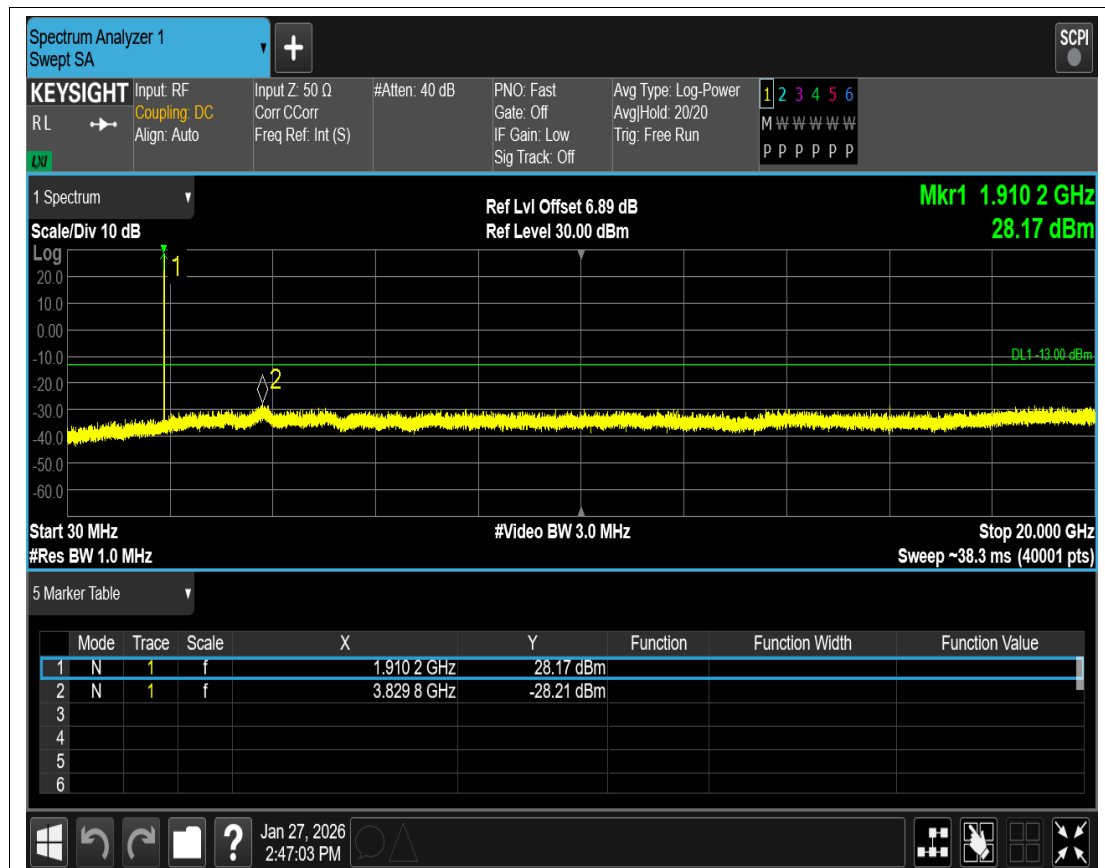

GPRS1900 Channel=810

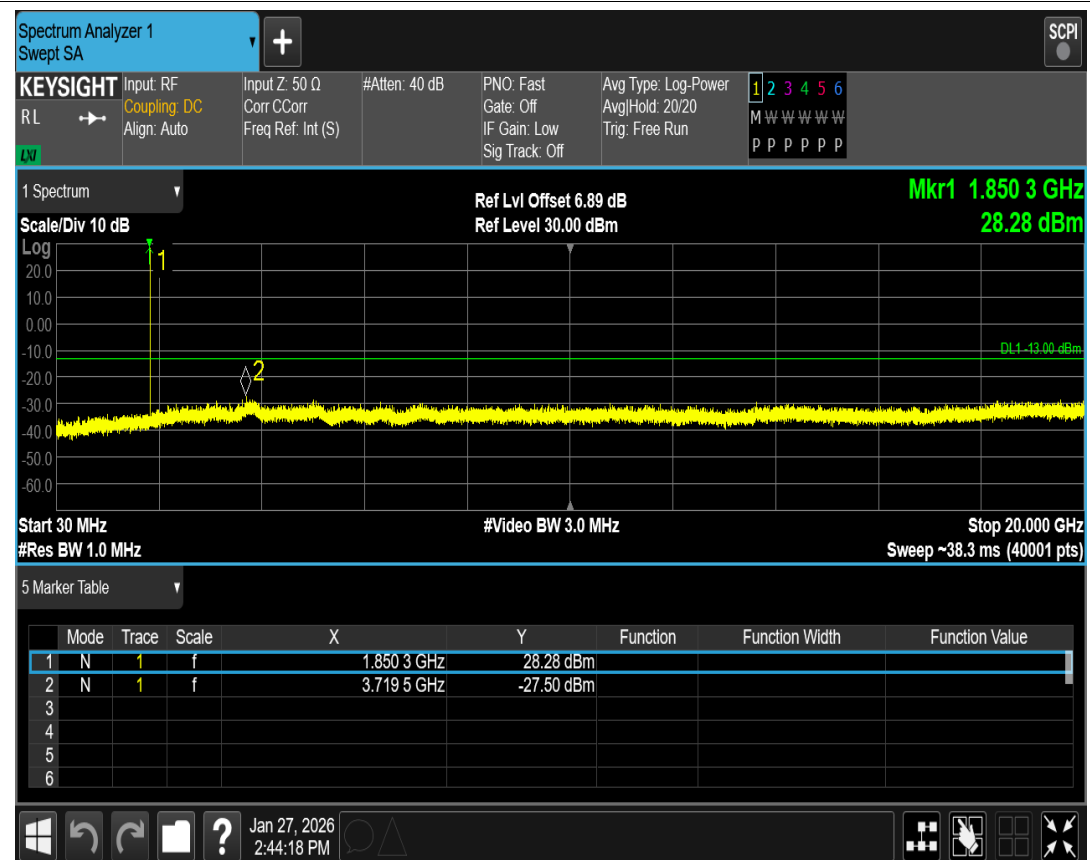

GSM1900 Channel=512

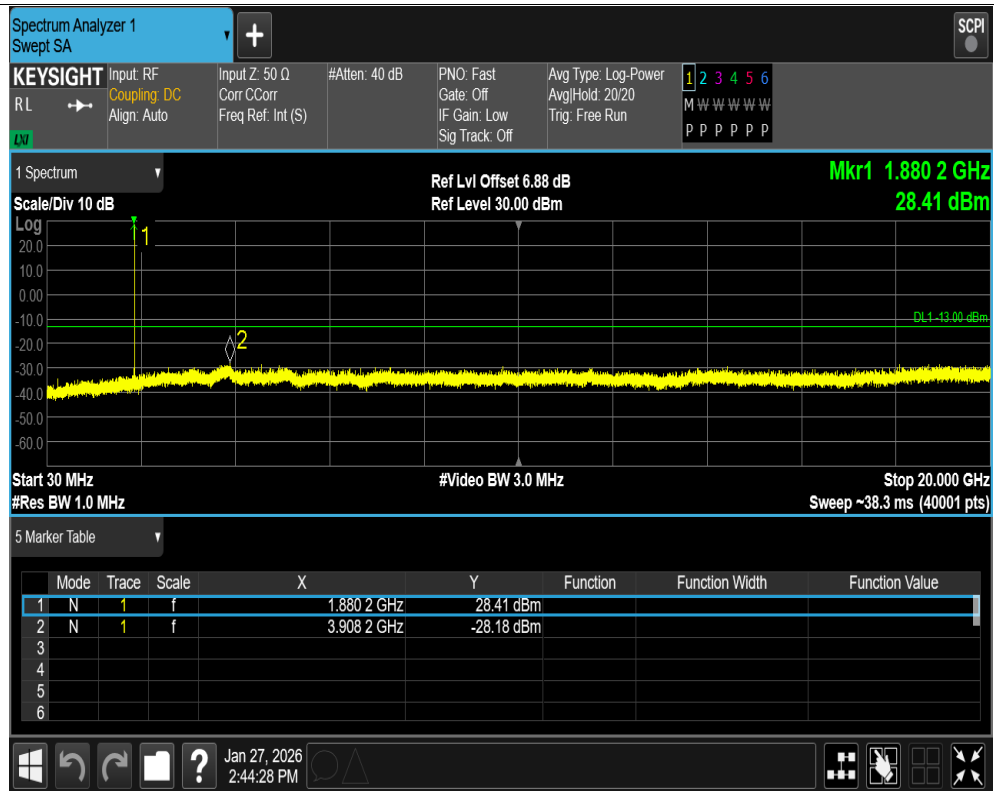

GSM1900 Channel=661



GSM1900 Channel=810