

TEST REPORT

Applicant: TECNO MOBILITY LIMITED

Address: FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE
19-25 SHAN MEI STREET FOTAN NT HONGKONG

Product Name: Mobile Phone

FCC ID: 2ADYY-LK7

Standard(s): 47 CFR Part 96
ANSI C63.26-2015

Report Number: 2602R09298E-RF-00H

Report Date: 2026/5/8

The above device has been tested and found compliant with the requirement of the relevant standards by Bay Area Compliance Laboratories Corp. (Dongguan).

Alice Tan

Pedro Yun

Reviewed By: Alice Tan

Approved By: Pedro Yun

Title: RF Engineer

Title: RF Supervisor

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

CONTENTS

DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST	5
1.2 ACCESSORY INFORMATION	5
1.3 OPERATION VOLTAGE(V_{DC})▲	5
1.4 TRANSMISSION ANTENNA INFORMATION▲	5
1.5 EQUIPMENT MODIFICATIONS	6
2. SUMMARY OF TEST RESULTS	7
3. DESCRIPTION OF TEST CONFIGURATION	8
3.1 EUT OPERATION CONDITION:	8
3.2 SUPPORT EQUIPMENT LIST AND DETAILS	9
3.3 SUPPORT CABLE LIST AND DETAILS	9
3.4 BLOCK DIAGRAM OF TEST SETUP	9
3.5 TEST FACILITY	11
3.6 MEASUREMENT UNCERTAINTY	11
4. REQUIREMENTS AND TEST PROCEDURES	12
4.1 TRANSMITTER OUTPUT POWER AND EQUIVALENT RADIATED POWER:	12
4.1.1 Applicable Standard	12
4.1.2 Test Setup Block	12
4.1.3 Test Procedure	13
4.1.4 Test Results	13
4.2 OCCUPIED BANDWIDTH	14
4.2.1 Applicable Standard	14
4.2.2 Test Setup Block	14
4.2.3 Test Procedure	14
4.2.4 Test Results	15
4.3 FREQUENCY STABILITY	16
4.3.1 Applicable Standard	16
4.3.2 Test Setup Block	16
4.3.3 Test Procedure	16
4.3.4 Test Results	17
4.4 TRANSMITTER UNWANTED EMISSIONS-AT ANTENNA TERMINALS	18
4.4.1 Applicable Standard	18
4.4.2 Test Setup Block	19
4.4.3 Test Procedure	19
4.4.4 Test Results	19
4.5 TRANSMITTER UNWANTED EMISSIONS-OUT OF BAND EMISSION	20
4.5.1 Applicable Standard	20
4.5.2 Test Setup Block	21
4.5.3 Test Procedure	21
4.5.4 Test Results	21
4.6 ADJACENT CHANNEL LEAKAGE RATIO	22
4.6.1 Applicable Standard	22

4.6.2 Test Setup Block 22

4.6.3 Test Procedure..... 22

4.6.4 Test Results 22

4.7 TRANSMITTER UNWANTED EMISSIONS-RADIATED SPURIOUS EMISSIONS:23

4.7.1 Applicable Standard 23

4.7.2 Test setup 24

4.7.3 Test Procedure..... 25

4.7.4 Test Results 26

5. TEST DATA AND RESULTS27

5.1 ANTENNA PORT TEST DATA AND RESULTS:.....27

5.2 RADIATION SPURIOUS EMISSIONS.....28

EXHIBIT A - EUT PHOTOGRAPHS37

EXHIBIT B - TEST SETUP PHOTOGRAPHS38

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2602R09298E-RF-00H	Original Report	2026/5/8

1. GENERAL INFORMATION

1.1 General Description Of Equipment under Test

EUT Name:	Mobile Phone
EUT Model:	LK7
Operation Bands and modes:	5G NR Band 77_2: 3550-3700MHz 5G NR Band 78_2: 3550-3700MHz
EN DC possible combinations	DC_5A_n77A, DC_7A_n77A, DC_41A_n77A, DC_66A_n77A, DC_2A_n78A, DC_4A_n78A, DC_5A_n78A, DC_7A_n78A, DC_38A_n78A, DC_41A_n78A, DC_66A_n78A
Modulation Type:	DFT-s-OFDM: $\pi/2$ BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM
Rated Input Voltage:	DC 3.92V from Battery or DC 9V from Adapter
Serial Number:	For Radiated Spurious Emissions tests: 3J02-4 For RF Conducted Test: 3J02-1
EUT Received Date:	2026/3/27
EUT Received Status:	Good
Note: 1. For NSA mode, we only show the combination of the maximum power among all NSA combinations in the report as below: DC_5A_n77A, DC_5A_n78A, please refer to report: 2602R09298E-RF-00J. 2. The device is an End User Device.	

1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
Adapter	TECNO MOBILITY LIMITED	U45TSB	Input: AC 100~240V, 50/60Hz, 1.8A Output: DC 5V 3A 15W or 5-10V 4.5A or 11V 4.1A 45W MAX

1.3 Operation Voltage(V_{DC}) ▲

Lowest:	3.0	Normal:	3.92	Highest:	4.53
---------	-----	---------	------	----------	------

1.4 Transmission Antenna Information ▲

Antenna	Antenna Type	Operation Bands	Antenna Frequency Range (MHz)	Antenna Gain(G_T) (dBi)	L_c (dB)
ANT 0	LDS	NR n77_2	3550-3700	-6.33	0
		NR n78_2	3550-3700	-6.33	0
ANT 3		NR n77_2	3550-3700	-3.02	0
		NR n78_2	3550-3700	-3.02	0
ANT 5		NR n77_2	3550-3700	-5.31	0
		NR n78_2	3550-3700	-5.31	0
ANT 6		NR n77_2	3550-3700	-2.74	0
		NR n78_2	3550-3700	-2.74	0
Note: 1. L_c = Signal Attenuation in the connecting cable between the transmitter and antenna, in dB. 2. All Band support multi-antenna transmission can be switched, and the maximum antenna gain is calculated.					

1.5 Equipment Modifications

No modifications are made to the EUT during all test items.

2. SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC§2.1046; § 96.41(b)	RF Output Power	Compliant
FCC§ 2.1047	Modulation Characteristics	Not Applicable
FCC§ 2.1049; § 96.41	Occupied Bandwidth	Compliant
FCC§ 2.1051; § 96.41(e)	Spurious Emissions at Antenna Terminal	Compliant
FCC§ 96.41(e)	Out of band emission, Band Edge	Compliant
FCC§ 2.1055	Frequency stability vs. temperature Frequency stability vs. voltage	Compliant
FCC§ 2.1053; §96.41(e)	Radiated Spurious Emission	Compliant
FCC §96.41(e)	Adjacent Channel Leakage Ratio	Compliant

3. DESCRIPTION OF TEST CONFIGURATION

3.1 EUT Operation Condition:

The EUT was configured for testing according to ANSI C63.26-2015.

The test items were performed with the EUT operating at testing mode. The device operates on n77_2/n78_2, test was performed with channels as below table:

Frequency Bands	SCS (kHz)	Bandwidth (MHz)	Test Frequency(MHz)		
			Low	Middle	High
n77_2	15, 30	10	3555	3625	3695
	15, 30	15	3557.5	3625	3692.5
	15, 30	20	3560	3625	3690
	15, 30	25	3562.5	3625	3687.5
	15, 30	30	3565	3625	3685
	15, 30	40	3570	3625	3680
	15, 30	50	3575	3625	3675
	15, 30	60	3580	3625	3670
	30	70	3585	3625	3665
	30	80	3590	3625	3660
	30	90	3595	3625	3655
	30	100	3600	3625	3650
n78_2	15, 30	10	3555	3625	3695
	15, 30	15	3557.5	3625	3692.5
	15, 30	20	3560	3625	3690
	15, 30	25	3562.5	3625	3687.5
	15, 30	30	3565	3625	3685
	15, 30	40	3570	3625	3680
	15, 30	50	3575	3625	3675
	15, 30	60	3580	3625	3670
	30	70	3585	3625	3665
	30	80	3590	3625	3660
	30	90	3595	3625	3655
	30	100	3600	3625	3650

Note:

1. The device support SCS 15kHz and 30kHz, they have same output power, so only SCS 30kHz tested for TDD band.
2. For modulation of CP-OFDM and DFT-s-OFDM, the maximum power of CP-OFDM is lower than DFT-s-OFDM modulation, therefore, we chose higher power (DFT-s-OFDM modulation) to perform all tests and show in the report.

3.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
R&S	Wideband Radio Communication Tester	CMW500	149216
Unknown	Antenna	Unknown	Unknown
Anritsu	Radio Communication Test Station	MT8000A	6272709229

3.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	No	No	1	Adapter	EUT
Signal Cable	no	no	3	Antenna	Wideband Radio Communication Tester/Radio Communication Test Station

3.4 Block Diagram of Test Setup

Radiated Spurious Emission:
Below 1G:

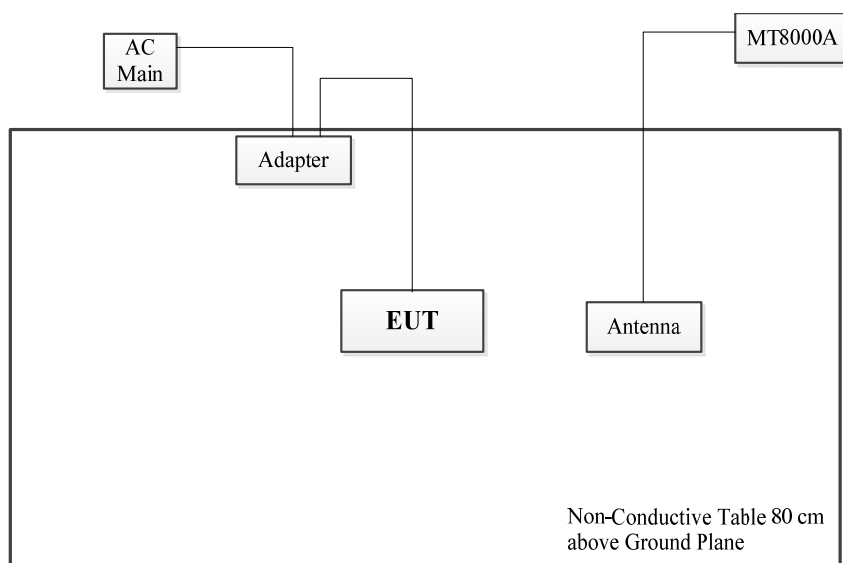

Above 1G:

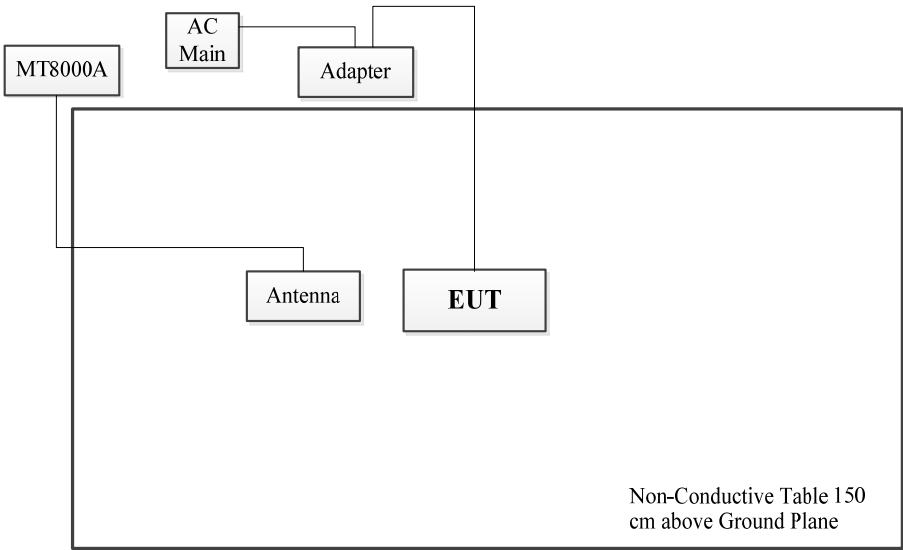

3.5 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

3.6 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.55 dB
Power Spectral Density, conducted	±0.55 dB
Unwanted Emissions, radiated	30MHz~1GHz: 5.12 dB, 1GHz~18GHz: 5.61 dB, 18GHz~26.5GHz: 5.33 dB, 26.5GHz~40GHz: 5.33 dB
Unwanted Emissions, conducted	±2.47 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
RF Frequency	±0.076×10 ⁻⁶

4. REQUIREMENTS AND TEST PROCEDURES

4.1 Transmitter output power and equivalent radiated power:

4.1.1 Applicable Standard

FCC §96.41
(b) Power limits. Unless otherwise specified in this section, the maximum effective isotropic radiated power (EIRP) and maximum Power Spectral Density (PSD) of any CBSD and End User Device must comply with the limits shown in the table in this paragraph (b):


Device	Maximum EIRP (dBm/10 megahertz)	Maximum PSD (dBm/MHz)
End User Device	23	n/a
Category A CBSD	30	20
Category B CBSD ¹	47	37

¹ Category B CBSDs will only be authorized for use after an ESC is approved and commercially deployed consistent with §§ 96.15 and 96.67.

(g) Power measurement. The peak-to-average power ratio (PAPR) of any CBSD transmitter output power must not exceed 13 dB. PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities or another Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.


4.1.2 Test Setup Block

For RF Output Power:

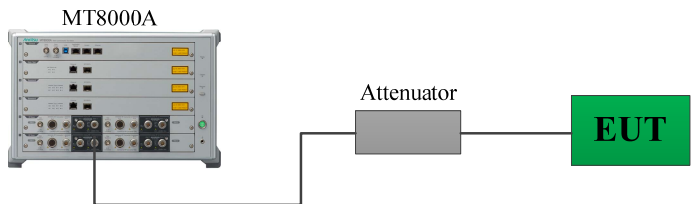

Note: The Insertion loss of the RF cable and coaxial Attenuator was offset into the Reading of MT8000A.

For PAR:

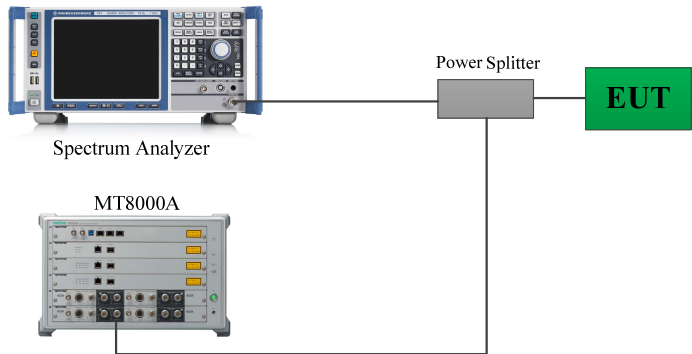

Note: The Insertion loss of the RF cable and Power Splitter was offset into the Reading of Spectrum Analyzer.

4.1.3 Test Procedure

For RF Output Power:

According to CFR Part 2.1046, ANSI C63.26-2015 Section 5.2.5.5:

Connect the instrument and the EUT according to the Test Setup Block, and then read the Test results on the CMW500/Wireless Communication Test Set.

For PAR:

According to ANSI C63.26-2015 Section 5.2.3.4:

- a) Set resolution/measurement bandwidth $\geq$ OBW or specified reference bandwidth.
- b) Set the number of counts to a value that stabilizes the measured CCDF curve.
- c) Set the measurement interval as follows:
 - 1) For continuous transmissions, set to the greater of $[10 \times (\text{number of points in sweep}) \times (\text{transmission symbol period})]$ or 1 ms.
 - 2) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize. Set the measurement interval to a time that is less than or equal to the burst duration.
 - 3) If there are several carriers in a single antenna port, the peak power shall be determined for each individual carrier (by disabling the other carriers while measuring the required carrier) and the total peak power calculated from the sum of the individual carrier peak powers.
- d) Record the maximum PAPR level associated with a probability of 0.1%.
- e) The peak power level is calculated from the sum of the PAPR value from step d) to the measured average power.

4.1.4 Test Results

Please refer to section 5.1.


4.2 Occupied Bandwidth

4.2.1 Applicable Standard

FCC 47§2.1049, §96.41

Occupied Bandwidth shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

4.2.2 Test Setup Block

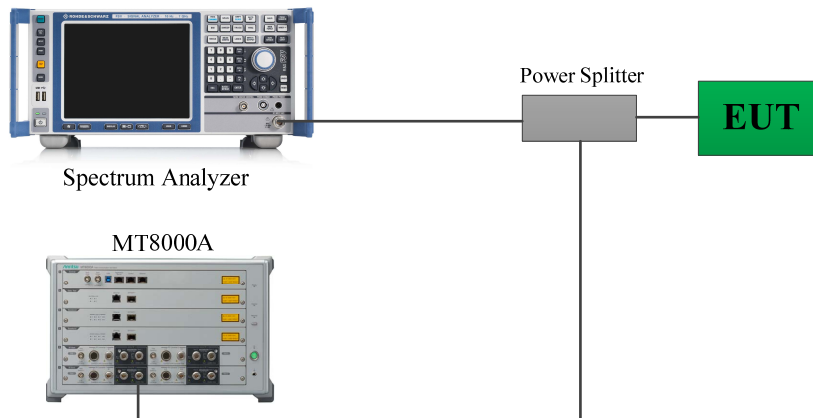

Note: The Insertion loss of the RF cable and Power Splitter was offset into the Reading of Spectrum Analyzer.

4.2.3 Test Procedure

According to ANSI C63.26-2015 Section 5.4.4

The OBW is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring (99%) power bandwidth:

- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient).
- The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.
- Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
NOTE—Step a), step b), and step c) may require iteration to adjust within the specified tolerances.
- Set the detection mode to peak, and the trace mode to max-hold.
- If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.

f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

4.2.4 Test Results

Please refer to section 5.1.


4.3 Frequency stability

4.3.1 Applicable Standard

FCC §2.1055

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

4.3.2 Test Setup Block

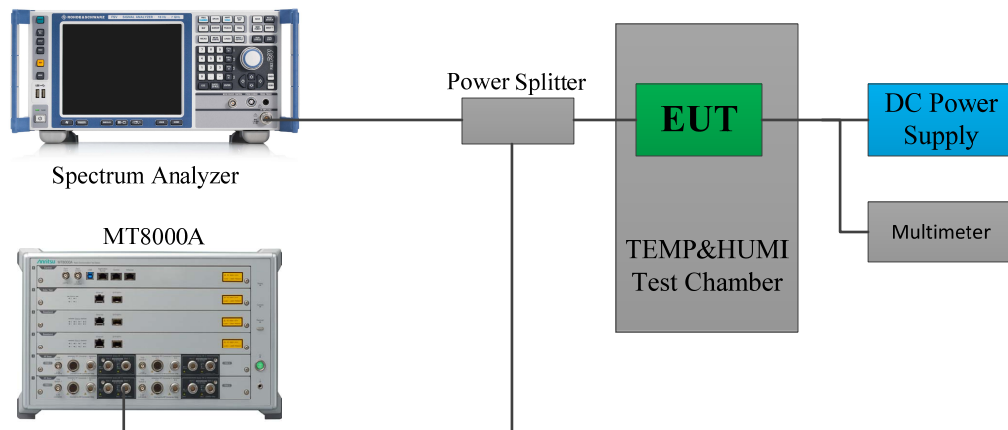

Note: The Insertion loss of the RF cable and Power Splitter was offset into the Reading of Spectrum Analyzer.

4.3.3 Test Procedure

According to ANSI C63.26-2015 Section 5.6:

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage.

The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency determining circuit element shall be made subsequent to this initial set-up. Frequency stability is tested:

- At 10 °C intervals of temperatures between -30 °C and +50 °C at the manufacturer's rated supply voltage, and
- At +20 °C temperature and $\pm 15\%$ supply voltage variations. If a product is specified to operate over a range of input voltage then the -15% variation is applied to the lowermost voltage and the +15% is applied to the uppermost voltage.

During the test all necessary settings, adjustments and control of the EUT have to be performed without disturbing the test environment, i.e., without opening the environmental chamber. The frequency stabilities can be maintained to a lesser temperature range provided that the transmitter is automatically inhibited from operating outside the lesser temperature range. For handheld equipment that is only capable of operating from internal batteries and the supply voltage cannot be varied, the frequency stability tests shall be performed at the nominal battery voltage and the battery end point voltage specified by the manufacturer. An external supply voltage can be used and set at the internal battery nominal voltage, and again at the battery operating end point voltage which shall be specified by the equipment manufacturer.

If an unmodulated carrier is not available, the mean frequency of a modulated carrier can be obtained by using a frequency counter with gating time set to an appropriately large multiple of bit periods (gating time depending on the required accuracy). Full details on the choice of values shall be included in the test report.

4.3.4 Test Results

Please refer to section 5.1.

4.4 Transmitter unwanted emissions-at antenna terminals


4.4.1 Applicable Standard

FCC §96.41

(e) 3.5 GHz Emissions and Interference Limits--

(1) General protection levels.

Figure 1 to paragraph (e) – Protection levels

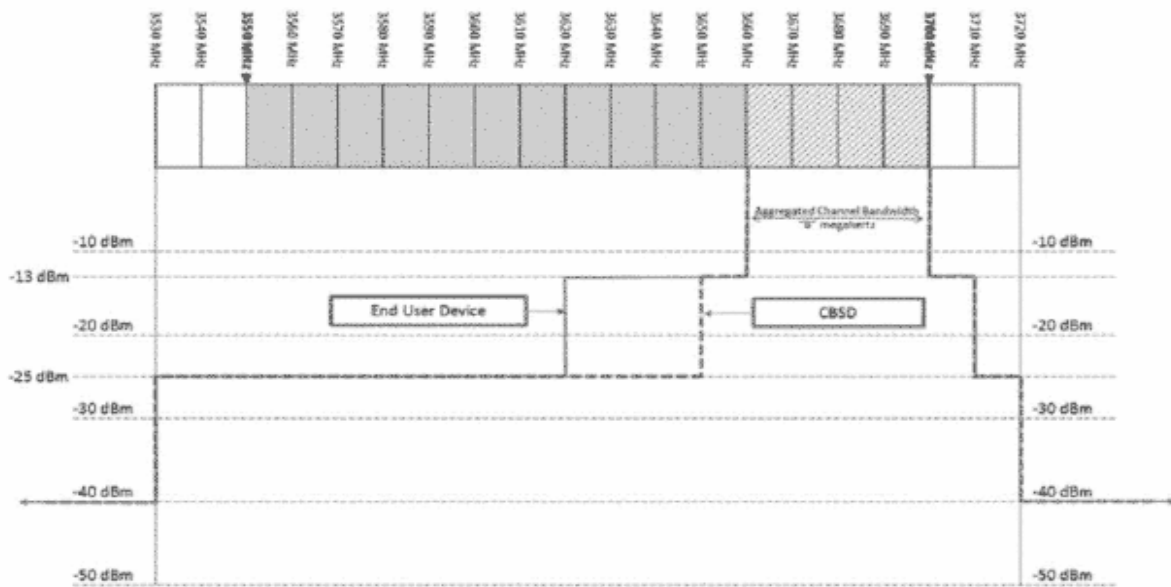


(i) Except as otherwise specified in paragraph (e)(2) of this section, for channel and frequency assignments made by the SAS to CBSDs, the conducted power of any CBSD emission outside the fundamental emission bandwidth as specified in paragraph (e)(3) of this section (whether the emission is inside or outside of the authorized band) shall not exceed -13 dBm/MHz within 0-10 megahertz above the upper SAS-assigned channel edge and within 0-10 megahertz below the lower SAS-assigned channel edge. At all frequencies greater than 10 megahertz above the upper SAS assigned channel edge and less than 10 MHz below the lower SAS assigned channel edge, the conducted power of any CBSD emission shall not exceed -25 dBm/MHz. The upper and lower SAS assigned channel edges are the upper and lower limits of any channel assigned to a CBSD by an SAS, or in the case of multiple contiguous channels, the upper and lower limits of the combined contiguous channels.

(ii) Except as otherwise specified in paragraph (e)(2) of this section, for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed -25 dBm/MHz. Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

(2) Additional protection levels. Notwithstanding paragraph (e)(1) of this section, for CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz.

4.4.2 Test Setup Block

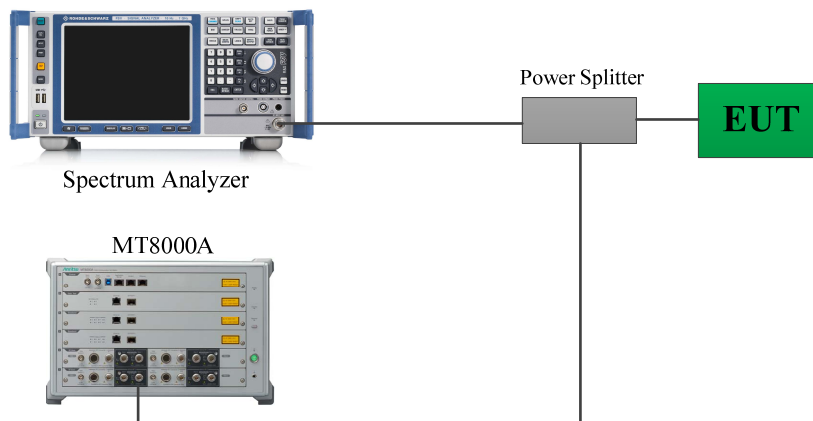

Note: The Insertion loss of the RF cable and Power Splitter was offset into the Reading of Spectrum Analyzer.

4.4.3 Test Procedure

According to ANSI C63.26-2015 Section 5.7.4:

the applicable rule part specifies the reference bandwidth for measuring unwanted emission levels (typically, 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GHz),8 effectively depicting the unwanted emission limit in terms of a power spectral density. In those cases where no reference bandwidth is explicitly specified, the values in the preceding sentence should be used.

4.4.4 Test Results

Please refer to section 5.1.

4.5 Transmitter unwanted emissions-Out of band emission


4.5.1 Applicable Standard

FCC §96.41

(e) 3.5 GHz Emissions and Interference Limits--

(1) General protection levels.

Figure 1 to paragraph (e) – Protection levels

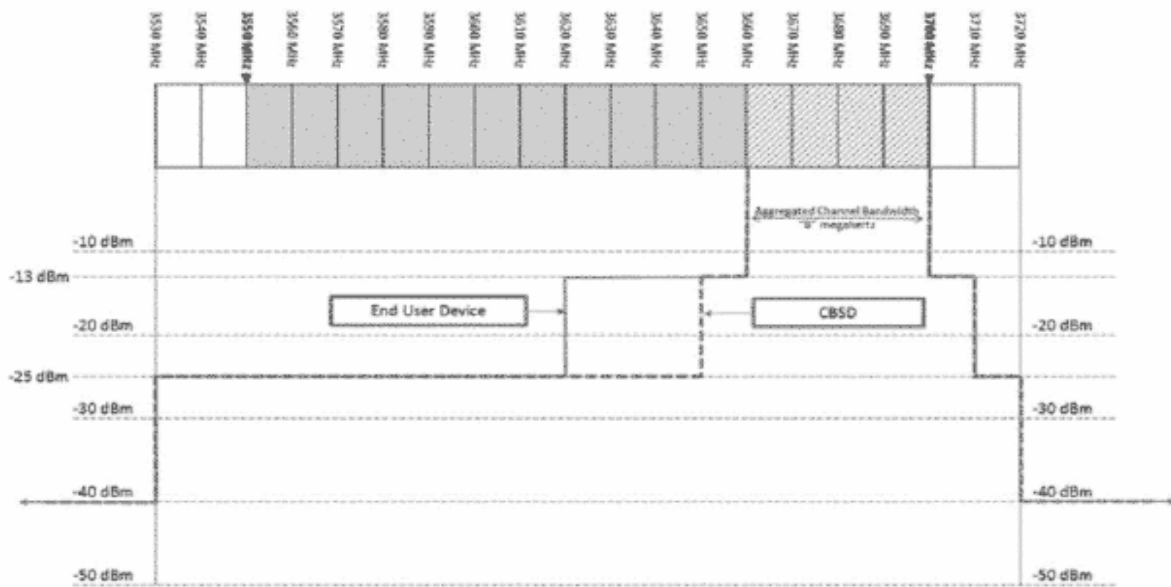


(i) Except as otherwise specified in paragraph (e)(2) of this section, for channel and frequency assignments made by the SAS to CBSDs, the conducted power of any CBSD emission outside the fundamental emission bandwidth as specified in paragraph (e)(3) of this section (whether the emission is inside or outside of the authorized band) shall not exceed -13 dBm/MHz within 0-10 megahertz above the upper SAS-assigned channel edge and within 0-10 megahertz below the lower SAS-assigned channel edge. At all frequencies greater than 10 megahertz above the upper SAS assigned channel edge and less than 10 MHz below the lower SAS assigned channel edge, the conducted power of any CBSD emission shall not exceed -25 dBm/MHz. The upper and lower SAS assigned channel edges are the upper and lower limits of any channel assigned to a CBSD by an SAS, or in the case of multiple contiguous channels, the upper and lower limits of the combined contiguous channels.

(ii) Except as otherwise specified in paragraph (e)(2) of this section, for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed -25 dBm/MHz. Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

(2) Additional protection levels. Notwithstanding paragraph (e)(1) of this section, for CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz.

4.5.2 Test Setup Block

For Band Edge:

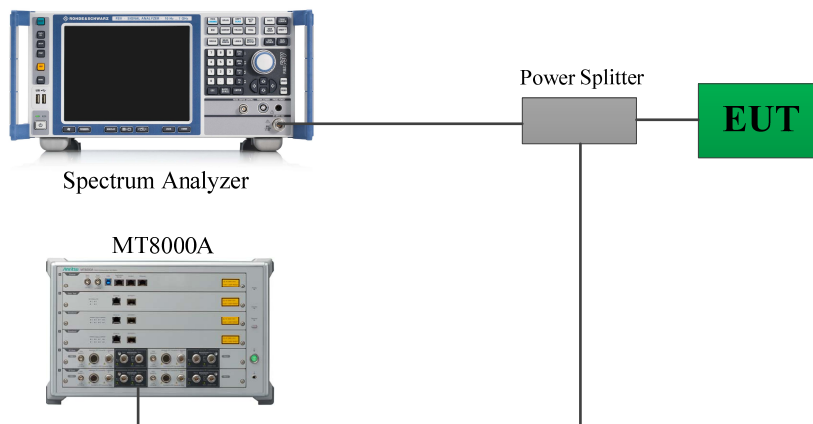

Note: The Insertion loss of the RF cable and Power Splitter was offset into the Reading of Spectrum Analyzer.

4.5.3 Test Procedure

According to ANSI C63.26-2015 Section 5.7.3:

Typically, a measurement (resolution) bandwidth smaller than the reference bandwidth is allowed for measurements within a specified frequency range at the edge of the authorized frequency block/band (e.g., within the first Y MHz outside of the authorized frequency band/block, where the value of Y is specified in the relevant rule part). Some FCC out-of-band emission rules permit the use of a narrower RBW (typically limited to a minimum RBW of 1 % of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth. Beyond the specified frequency range in which this relaxation of the uniform reference bandwidth is permitted, it typically is also acceptable to use a narrower RBW (again limited to a minimum of 1 % of OBW) to increase accuracy, but the measurement result must subsequently be integrated over the full reference bandwidth.

4.5.4 Test Results

Please refer to section 5.1.

4.6 Adjacent Channel Leakage Ratio


4.6.1 Applicable Standard

FCC §96.41

(e) 3.5 GHz Emissions and Interference Limits

(1) (ii) Except as otherwise specified in paragraph (e)(2) of this section, for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed -25 dBm/MHz. Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

4.6.2 Test Setup Block

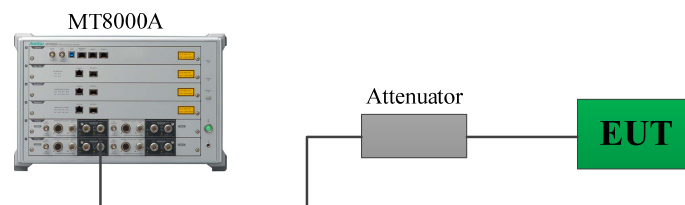

Note: The Insertion loss of the RF cable and Power Splitter was offset into the Reading of Spectrum Analyzer.

4.6.3 Test Procedure

According to ANSI C63.26-2015 Section 5.7.3:

Typically, a measurement (resolution) bandwidth smaller than the reference bandwidth is allowed for measurements within a specified frequency range at the edge of the authorized frequency block/band (e.g., within the first Y MHz outside of the authorized frequency band/block, where the value of Y is specified in the relevant rule part). Some FCC out-of-band emission rules permit the use of a narrower RBW (typically limited to a minimum RBW of 1 % of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth. Beyond the specified frequency range in which this relaxation of the uniform reference bandwidth is permitted, it typically is also acceptable to use a narrower RBW (again limited to a minimum of 1 % of OBW) to increase accuracy, but the measurement result must subsequently be integrated over the full reference bandwidth.

4.6.4 Test Results

Please refer to section 5.1.

4.7 Transmitter unwanted emissions-Radiated Spurious emissions:


4.7.1 Applicable Standard

FCC §96.41

(e) 3.5 GHz Emissions and Interference Limits--

(1) General protection levels.

Figure 1 to paragraph (e) – Protection levels

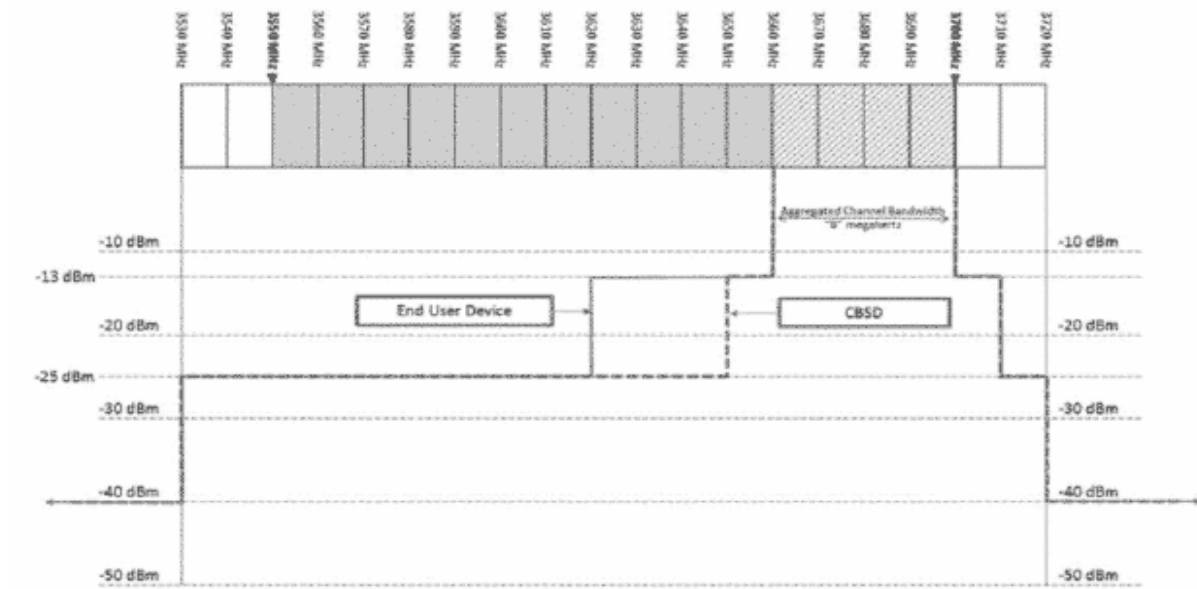

(i) Except as otherwise specified in paragraph (e)(2) of this section, for channel and frequency assignments made by the SAS to CBSDs, the conducted power of any CBSD emission outside the fundamental emission bandwidth as specified in paragraph (e)(3) of this section (whether the emission is inside or outside of the authorized band) shall not exceed -13 dBm/MHz within 0-10 megahertz above the upper SAS-assigned channel edge and within 0-10 megahertz below the lower SAS-assigned channel edge. At all frequencies greater than 10 megahertz above the upper SAS assigned channel edge and less than 10 MHz below the lower SAS assigned channel edge, the conducted power of any CBSD emission shall not exceed -25 dBm/MHz. The upper and lower SAS assigned channel edges are the upper and lower limits of any channel assigned to a CBSD by an SAS, or in the case of multiple contiguous channels, the upper and lower limits of the combined contiguous channels.

(ii) Except as otherwise specified in paragraph (e)(2) of this section, for channel and frequency assignments made by a CBSD to End User Devices, the conducted power of any End User Device emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B megahertz (where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B megahertz below the lower CBSD-assigned channel edge. At all frequencies greater than B megahertz above the upper CBSD assigned channel edge and less than B megahertz below the lower CBSD-assigned channel edge, the conducted power of any End User Device emission shall not exceed -25 dBm/MHz. Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

(2) Additional protection levels. Notwithstanding paragraph (e)(1) of this section, for CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz.

4.7.2 Test setup

According to ANSI C63.26-2015 Section 5.5.3:

Test setup:

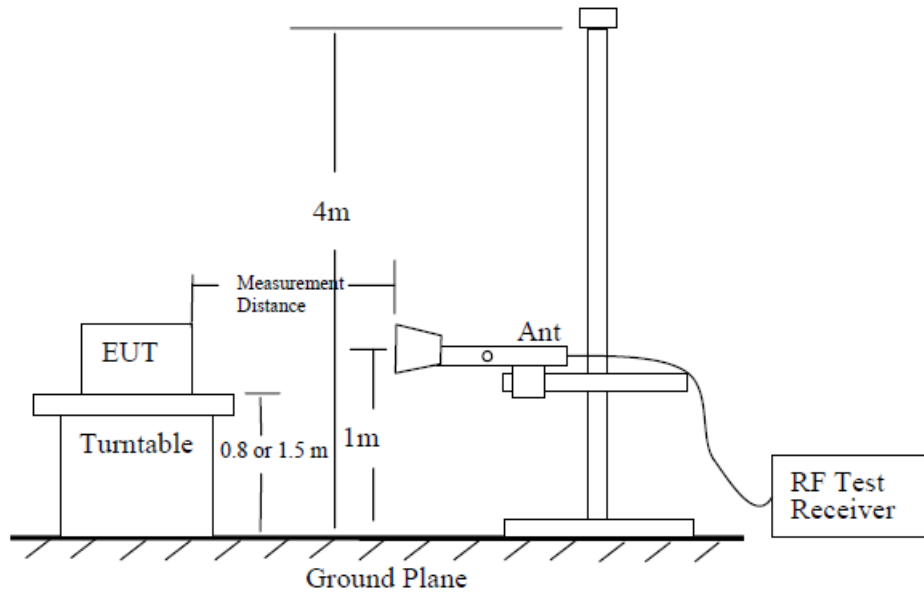


Figure 6 —Test site-up for radiated ERP and/or EIRP measurements

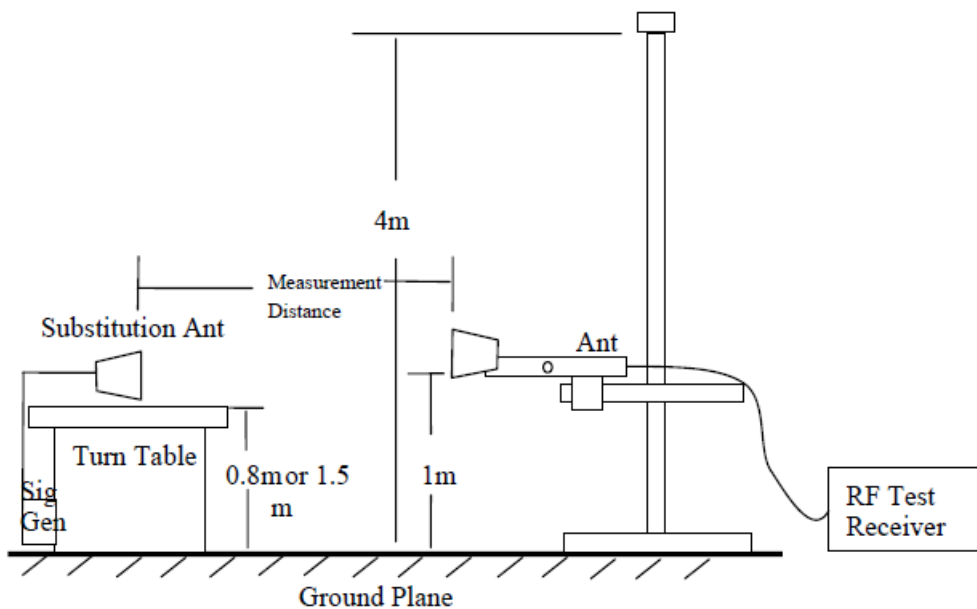


Figure 7 —Substitution method set-up for radiated emission

4.7.3 Test Procedure

According to ANSI C63.26-2015 Section 5.5.3:

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
 - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
 - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
 - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
where
 - P_e = equivalent emission power in dBm
 - P_s = source (signal generator) power in dBmNOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
- j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from: $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$. If necessary, the antenna gain can be calculated from calibrated antenna factor information
- k) Provide the complete measurement results as a part of the test report.

4.7.4 Test Results

Please refer to section 5.2.

5. TEST DATA AND RESULTS

5.1 Antenna Port Test Data and Results:

Please refer to the attachment Appendix E1, E2, E3, E4, E5, E6, E7, E8 .

5.2 Radiation Spurious Emissions

Serial Number:	3J02-4	Test Date:	2026/4/7~2026/4/14
Test Site:	Chamber 10m, Chamber B	Test Mode:	Transmitting
Tester:	Joe Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.3~24.8	Relative Humidity: (%)	40~44	ATM Pressure: (kPa)	100.2~101.1
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
30MHz~1000MHz					
Sunol Sciences	Hybrid Antenna	JB3	A060611-1	2025/6/23	2028/6/22
Narda	Coaxial Attenuator	779-6dB	04269	2025/6/23	2028/6/22
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2025/7/1	2026/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2025/7/1	2026/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2025/7/1	2026/6/30
Sonoma	Amplifier	310N	185914	2025/8/25	2026/8/24
R&S	EMI Test Receiver	ESR3	102453	2025/6/25	2026/6/24
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
Micro-Coax	Coaxial Cable	UFA210B	99G1448	2025/9/4	2026/9/3
Agilent	Signal Generator	E8247C	MY43321350	2025/7/28	2026/7/27
Anritsu	Radio Communication Test Station	MT8000A	6272709229	2025/9/21	2026/9/20
Above 1GHz					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
AH	Horn Antenna	SAS-571	1177	2026/1/22	2029/1/21
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2026/2/21	2029/2/20
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-03 1304	2026/2/6	2029/2/5
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2026/2/6	2029/2/5
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-02 1302	2026/2/21	2029/2/20
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2025/11/17	2026/11/16
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001 #0001	2025/11/14	2026/11/13
Micro-Coax	Coaxial Cable	UFA210B	99G1448	2025/9/4	2026/9/3
Agilent	Signal Generator	E8247C	MY43321350	2025/7/28	2026/7/27
AH	Preamplifier	PAM-0118P	469	2026/4/10	2027/4/10
AH	Preamplifier	PAM-1840VH	191	2025/9/4	2026/9/3
R&S	Spectrum Analyzer	FSV40	101944	2025/8/8	2026/8/7
Anritsu	Radio Communication Test Station	MT8000A	6272709229	2025/9/21	2026/9/20
Decentest	Multiplex Switch Test Control Set & Filter Switch Unit	DT7220SCU & DT7220FCU	DC79902 & DC79905	2025/8/25	2026/8/24

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

After pre-scan in the X, Y and Z axes of orientation, the worst case(Y axe was the worst) is below:

NR n77_2

ANT 0:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 10MHz, Frequency:3555MHz								
80.34	H	48.72	-59.82	0.00	0.26	-60.08	-40.00	20.08
375.16	V	58.63	-47.33	0.00	0.61	-47.94	-40.00	7.94
7110.00	H	48.72	-59.84	11.03	1.18	-49.99	-40.00	9.99
7110.00	V	48.38	-60.38	11.03	1.18	-50.53	-40.00	10.53
10665.00	H	47.23	-56.31	11.13	1.49	-46.67	-40.00	6.67
10665.00	V	47.19	-56.98	11.13	1.49	-47.34	-40.00	7.34
1RB, 10MHz, Frequency:3625MHz								
79.35	H	48.72	-59.25	-0.33	0.26	-59.84	-40.00	19.84
375.43	V	57.16	-48.79	0.00	0.61	-49.40	-40.00	9.40
7250.00	H	47.94	-60.44	10.95	1.19	-50.68	-40.00	10.68
7250.00	V	47.83	-60.95	10.95	1.19	-51.19	-40.00	11.19
10875.00	H	47.37	-56.40	11.05	1.58	-46.93	-40.00	6.93
10875.00	V	47.66	-56.64	11.05	1.58	-47.17	-40.00	7.17
1RB, 10MHz, Frequency:3695MHz								
80.62	H	47.21	-61.42	0.00	0.26	-61.68	-40.00	21.68
375.33	V	57.34	-48.62	0.00	0.61	-49.23	-40.00	9.23
7390.00	H	48.49	-59.70	10.87	1.20	-50.03	-40.00	10.03
7390.00	V	48.85	-59.94	10.87	1.20	-50.27	-40.00	10.27
11085.00	H	47.59	-56.28	11.12	1.62	-46.78	-40.00	6.78
11085.00	V	47.84	-56.28	11.12	1.62	-46.78	-40.00	6.78

ANT 3:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 10MHz, Frequency:3555MHz								
80.84	H	50.27	-58.43	0.00	0.26	-58.69	-40.00	18.69
375.49	V	58.11	-47.84	0.00	0.61	-48.45	-40.00	8.45
7110.00	H	48.67	-59.89	11.03	1.18	-50.04	-40.00	10.04
7110.00	V	48.28	-60.48	11.03	1.18	-50.63	-40.00	10.63
10665.00	H	47.16	-56.38	11.13	1.49	-46.74	-40.00	6.74
10665.00	V	47.34	-56.83	11.13	1.49	-47.19	-40.00	7.19
1RB, 10MHz, Frequency:3625MHz								
79.11	H	50.66	-57.14	-0.45	0.26	-57.85	-40.00	17.85
375.96	V	57.41	-48.53	0.00	0.61	-49.14	-40.00	9.14
7250.00	H	47.85	-60.53	10.95	1.19	-50.77	-40.00	10.77
7250.00	V	47.61	-61.17	10.95	1.19	-51.41	-40.00	11.41
10875.00	H	47.24	-56.53	11.05	1.58	-47.06	-40.00	7.06
10875.00	V	47.59	-56.71	11.05	1.58	-47.24	-40.00	7.24
1RB, 10MHz, Frequency:3695MHz								
80.43	H	50.29	-58.28	0.00	0.26	-58.54	-40.00	18.54
375.09	V	57.22	-48.74	0.00	0.61	-49.35	-40.00	9.35
7390.00	H	48.34	-59.85	10.87	1.20	-50.18	-40.00	10.18
7390.00	V	48.76	-60.03	10.87	1.20	-50.36	-40.00	10.36
11085.00	H	47.51	-56.36	11.12	1.62	-46.86	-40.00	6.86
11085.00	V	47.63	-56.49	11.12	1.62	-46.99	-40.00	6.99

ANT 5:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 10MHz, Frequency:3555MHz								
80.86	H	48.19	-60.51	0.00	0.26	-60.77	-40.00	20.77
375.19	V	58.24	-47.72	0.00	0.61	-48.33	-40.00	8.33
7110.00	H	48.75	-59.81	11.03	1.18	-49.96	-40.00	9.96
7110.00	V	48.34	-60.42	11.03	1.18	-50.57	-40.00	10.57
10665.00	H	47.27	-56.27	11.13	1.49	-46.63	-40.00	6.63
10665.00	V	47.39	-56.78	11.13	1.49	-47.14	-40.00	7.14
1RB, 10MHz, Frequency:3625MHz								
79.19	H	48.47	-59.39	-0.41	0.26	-60.06	-40.00	20.06
375.00	V	57.63	-48.34	0.00	0.61	-48.95	-40.00	8.95
7250.00	H	47.94	-60.44	10.95	1.19	-50.68	-40.00	10.68
7250.00	V	47.72	-61.06	10.95	1.19	-51.30	-40.00	11.30
10875.00	H	47.38	-56.39	11.05	1.58	-46.92	-40.00	6.92
10875.00	V	47.66	-56.64	11.05	1.58	-47.17	-40.00	7.17
1RB, 10MHz, Frequency:3695MHz								
81.88	H	47.39	-61.63	0.00	0.26	-61.89	-40.00	21.89
374.29	V	58.43	-47.56	0.00	0.61	-48.17	-40.00	8.17
7390.00	H	48.49	-59.70	10.87	1.20	-50.03	-40.00	10.03
7390.00	V	48.83	-59.96	10.87	1.20	-50.29	-40.00	10.29
11085.00	H	47.62	-56.25	11.12	1.62	-46.75	-40.00	6.75
11085.00	V	47.84	-56.28	11.12	1.62	-46.78	-40.00	6.78

ANT 6:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 10MHz, Frequency:3555MHz								
82.27	H	48.16	-60.97	0.00	0.26	-61.23	-40.00	21.23
376.29	V	58.27	-47.66	0.00	0.61	-48.27	-40.00	8.27
7110.00	H	48.86	-59.70	11.03	1.18	-49.85	-40.00	9.85
7110.00	V	48.55	-60.21	11.03	1.18	-50.36	-40.00	10.36
10665.00	H	47.54	-56.00	11.13	1.49	-46.36	-40.00	6.36
10665.00	V	47.62	-56.55	11.13	1.49	-46.91	-40.00	6.91
1RB, 10MHz, Frequency:3625MHz								
82.33	H	48.08	-61.07	0.00	0.26	-61.33	-40.00	21.33
376.52	V	57.13	-48.79	0.00	0.62	-49.41	-40.00	9.41
7250.00	H	48.23	-60.15	10.95	1.19	-50.39	-40.00	10.39
7250.00	V	47.84	-60.94	10.95	1.19	-51.18	-40.00	11.18
10875.00	H	47.42	-56.35	11.05	1.58	-46.88	-40.00	6.88
10875.00	V	47.58	-56.72	11.05	1.58	-47.25	-40.00	7.25
1RB, 10MHz, Frequency:3695MHz								
82.54	H	47.88	-61.34	0.00	0.26	-61.60	-40.00	21.60
376.85	V	58.96	-46.95	0.00	0.62	-47.57	-40.00	7.57
7390.00	H	48.55	-59.64	10.87	1.20	-49.97	-40.00	9.97
7390.00	V	48.76	-60.03	10.87	1.20	-50.36	-40.00	10.36
11085.00	H	47.72	-56.15	11.12	1.62	-46.65	-40.00	6.65
11085.00	V	47.94	-56.18	11.12	1.62	-46.68	-40.00	6.68

NR n78_2

ANT 0:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 10MHz, Frequency:3555MHz								
80.47	H	48.76	-59.82	0.00	0.26	-60.08	-40.00	20.08
375.69	V	57.94	-48.01	0.00	0.61	-48.62	-40.00	8.62
7110.00	H	47.78	-60.78	11.03	1.18	-50.93	-40.00	10.93
7110.00	V	47.66	-61.10	11.03	1.18	-51.25	-40.00	11.25
10665.00	H	47.28	-56.26	11.13	1.49	-46.62	-40.00	6.62
10665.00	V	47.53	-56.64	11.13	1.49	-47.00	-40.00	7.00
1RB, 10MHz, Frequency:3625MHz								
81.63	H	48.16	-60.78	0.00	0.26	-61.04	-40.00	21.04
376.14	V	58.45	-47.48	0.00	0.61	-48.09	-40.00	8.09
7250.00	H	47.34	-61.04	10.95	1.19	-51.28	-40.00	11.28
7250.00	V	47.42	-61.36	10.95	1.19	-51.60	-40.00	11.60
10875.00	H	47.65	-56.12	11.05	1.58	-46.65	-40.00	6.65
10875.00	V	47.38	-56.92	11.05	1.58	-47.45	-40.00	7.45
1RB, 10MHz, Frequency:3695MHz								
80.16	H	48.37	-60.12	0.00	0.26	-60.38	-40.00	20.38
374.29	V	57.69	-48.30	0.00	0.61	-48.91	-40.00	8.91
7390.00	H	47.84	-60.35	10.87	1.20	-50.68	-40.00	10.68
7390.00	V	47.95	-60.84	10.87	1.20	-51.17	-40.00	11.17
11085.00	H	47.72	-56.15	11.12	1.62	-46.65	-40.00	6.65
11085.00	V	47.65	-56.47	11.12	1.62	-46.97	-40.00	6.97

ANT 3:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 10MHz, Frequency:3555MHz								
80.16	H	48.39	-60.10	0.00	0.26	-60.36	-40.00	20.36
375.04	V	57.42	-48.55	0.00	0.61	-49.16	-40.00	9.16
7110.00	H	47.63	-60.93	11.03	1.18	-51.08	-40.00	11.08
7110.00	V	47.54	-61.22	11.03	1.18	-51.37	-40.00	11.37
10665.00	H	47.16	-56.38	11.13	1.49	-46.74	-40.00	6.74
10665.00	V	47.46	-56.71	11.13	1.49	-47.07	-40.00	7.07
1RB, 10MHz, Frequency:3625MHz								
81.07	H	48.55	-60.22	0.00	0.26	-60.48	-40.00	20.48
376.96	V	58.67	-47.23	0.00	0.62	-47.85	-40.00	7.85
7250.00	H	47.15	-61.23	10.95	1.19	-51.47	-40.00	11.47
7250.00	V	47.48	-61.30	10.95	1.19	-51.54	-40.00	11.54
10875.00	H	47.73	-56.04	11.05	1.58	-46.57	-40.00	6.57
10875.00	V	47.29	-57.01	11.05	1.58	-47.54	-40.00	7.54
1RB, 10MHz, Frequency:3695MHz								
80.52	H	48.74	-59.86	0.00	0.26	-60.12	-40.00	20.12
374.24	V	57.79	-48.20	0.00	0.61	-48.81	-40.00	8.81
7390.00	H	47.76	-60.43	10.87	1.20	-50.76	-40.00	10.76
7390.00	V	47.82	-60.97	10.87	1.20	-51.30	-40.00	11.30
11085.00	H	47.61	-56.26	11.12	1.62	-46.76	-40.00	6.76
11085.00	V	47.74	-56.38	11.12	1.62	-46.88	-40.00	6.88

ANT 5:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 10MHz, Frequency:3555MHz								
81.18	H	48.84	-59.96	0.00	0.26	-60.22	-40.00	20.22
374.75	V	57.66	-48.32	0.00	0.61	-48.93	-40.00	8.93
7110.00	H	47.71	-60.85	11.03	1.18	-51.00	-40.00	11.00
7110.00	V	47.64	-61.12	11.03	1.18	-51.27	-40.00	11.27
10665.00	H	47.36	-56.18	11.13	1.49	-46.54	-40.00	6.54
10665.00	V	47.54	-56.63	11.13	1.49	-46.99	-40.00	6.99
1RB, 10MHz, Frequency:3625MHz								
81.19	H	48.57	-60.23	0.00	0.26	-60.49	-40.00	20.49
376.21	V	58.49	-47.44	0.00	0.61	-48.05	-40.00	8.05
7250.00	H	47.34	-61.04	10.95	1.19	-51.28	-40.00	11.28
7250.00	V	47.58	-61.20	10.95	1.19	-51.44	-40.00	11.44
10875.00	H	47.82	-55.95	11.05	1.58	-46.48	-40.00	6.48
10875.00	V	47.39	-56.91	11.05	1.58	-47.44	-40.00	7.44
1RB, 10MHz, Frequency:3695MHz								
80.21	H	48.65	-59.85	0.00	0.26	-60.11	-40.00	20.11
374.37	V	57.77	-48.22	0.00	0.61	-48.83	-40.00	8.83
7390.00	H	47.72	-60.47	10.87	1.20	-50.80	-40.00	10.80
7390.00	V	47.93	-60.86	10.87	1.20	-51.19	-40.00	11.19
11085.00	H	47.68	-56.19	11.12	1.62	-46.69	-40.00	6.69
11085.00	V	47.87	-56.25	11.12	1.62	-46.75	-40.00	6.75

ANT 6:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
1RB, 10MHz, Frequency:3555MHz								
81.46	H	48.19	-60.70	0.00	0.26	-60.96	-40.00	20.96
374.93	V	57.67	-48.30	0.00	0.61	-48.91	-40.00	8.91
7110.00	H	48.22	-60.34	11.03	1.18	-50.49	-40.00	10.49
7110.00	V	47.87	-60.89	11.03	1.18	-51.04	-40.00	11.04
10665.00	H	47.69	-55.85	11.13	1.49	-46.21	-40.00	6.21
10665.00	V	47.74	-56.43	11.13	1.49	-46.79	-40.00	6.79
1RB, 10MHz, Frequency:3625MHz								
81.18	H	48.58	-60.22	0.00	0.26	-60.48	-40.00	20.48
376.95	V	58.46	-47.45	0.00	0.62	-48.07	-40.00	8.07
7250.00	H	47.57	-60.81	10.95	1.19	-51.05	-40.00	11.05
7250.00	V	47.83	-60.95	10.95	1.19	-51.19	-40.00	11.19
10875.00	H	47.79	-55.98	11.05	1.58	-46.51	-40.00	6.51
10875.00	V	47.64	-56.66	11.05	1.58	-47.19	-40.00	7.19
1RB, 10MHz, Frequency:3695MHz								
80.47	H	48.22	-60.36	0.00	0.26	-60.62	-40.00	20.62
374.29	V	57.69	-48.30	0.00	0.61	-48.91	-40.00	8.91
7390.00	H	47.82	-60.37	10.87	1.20	-50.70	-40.00	10.70
7390.00	V	48.25	-60.54	10.87	1.20	-50.87	-40.00	10.87
11085.00	H	47.76	-56.11	11.12	1.62	-46.61	-40.00	6.61
11085.00	V	47.95	-56.17	11.12	1.62	-46.67	-40.00	6.67

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gai.
- 3) Margin = Limit-Absolute Level

EXHIBIT A - EUT PHOTOGRAPHS

Please refer to the attachment 2602R09298E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2602R09298E-RF-INP EUT INTERNAL PHOTOGRAPHS.

EXHIBIT B - TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2602R09298E-RF-00J-TSP TEST SETUP PHOTOGRAPHS.

******* END OF REPORT *******