



Appendix C

RF Test Data for 5.8GWIFI (Conducted Measurement)

Product Name: Gaming tablet

Test Model: MGS101-09B


Environmental Conditions

Temperature:	24.8° C
Relative Humidity:	53.7%
ATM Pressure:	100.0 kPa
Test Engineer:	Jerry Chu
Supervised by:	Can Kun




C.1 -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	16.37	0.5	Pass
NVNT	a	5785	Ant1	16.35	0.5	Pass
NVNT	a	5825	Ant1	16.38	0.5	Pass
NVNT	n20	5745	Ant1	17.43	0.5	Pass
NVNT	n20	5785	Ant1	17.55	0.5	Pass
NVNT	n20	5825	Ant1	17.55	0.5	Pass
NVNT	n40	5755	Ant1	36.28	0.5	Pass
NVNT	n40	5795	Ant1	36.16	0.5	Pass
NVNT	ac20	5745	Ant1	17.42	0.5	Pass
NVNT	ac20	5785	Ant1	17.41	0.5	Pass
NVNT	ac20	5825	Ant1	17.54	0.5	Pass
NVNT	ac40	5755	Ant1	36.2	0.5	Pass
NVNT	ac40	5795	Ant1	36.42	0.5	Pass
NVNT	ac80	5775	Ant1	75.49	0.5	Pass

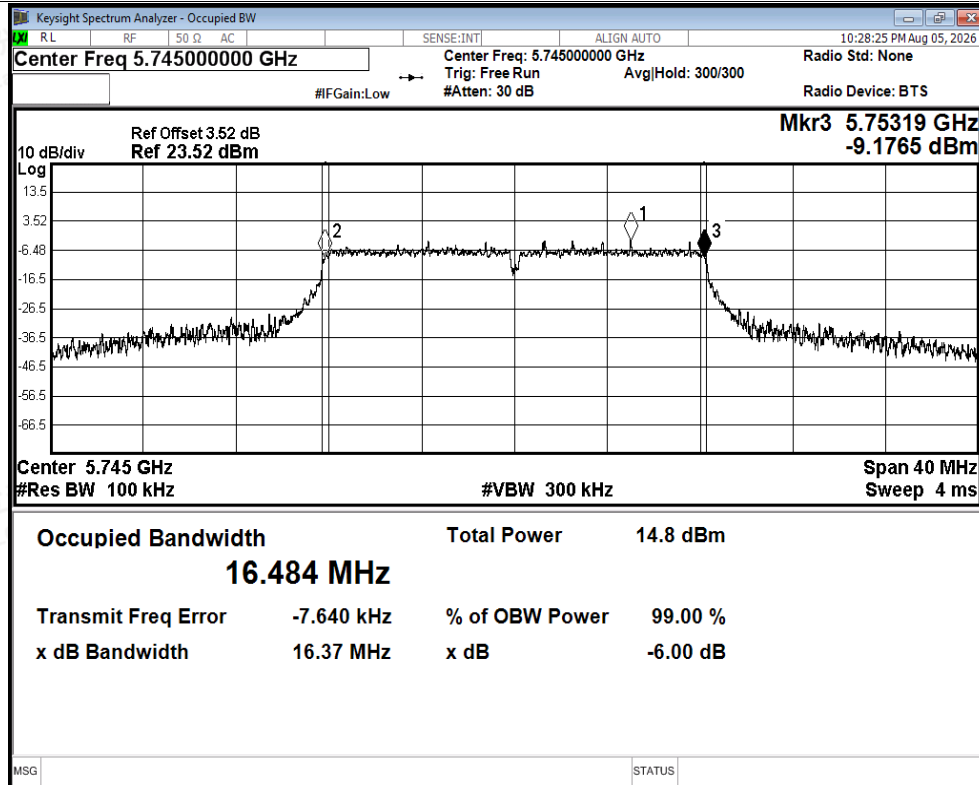


-6dB Bandwidth NVNT a 5745MHz Ant1

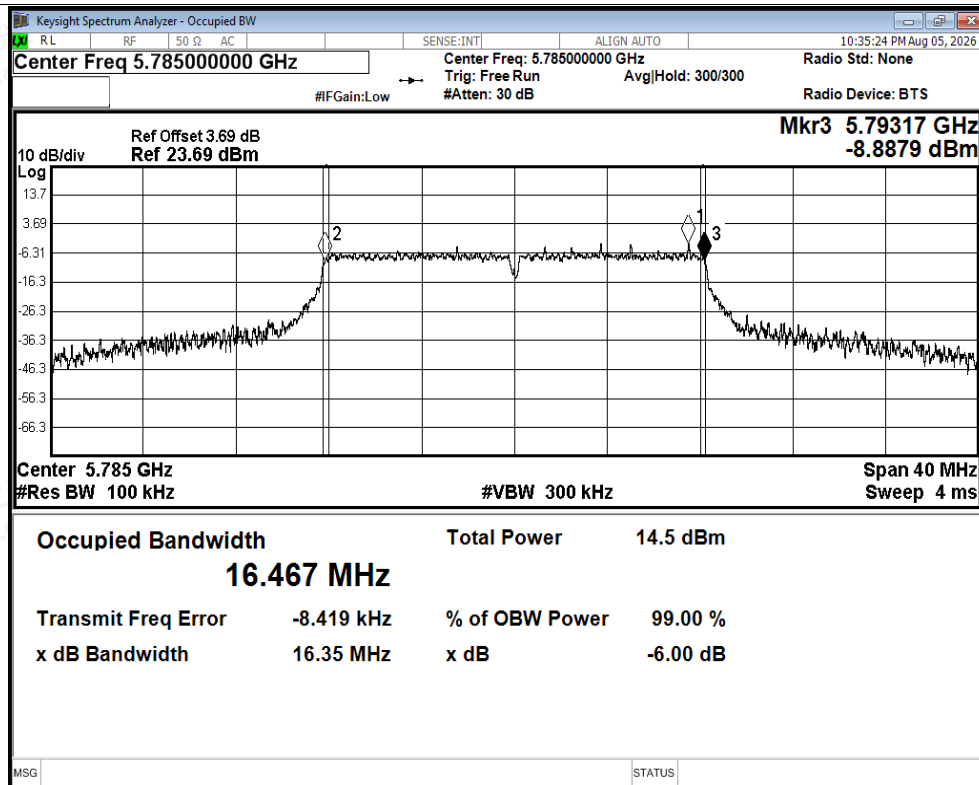


-6dB Bandwidth NVNT a 5785MHz Ant1

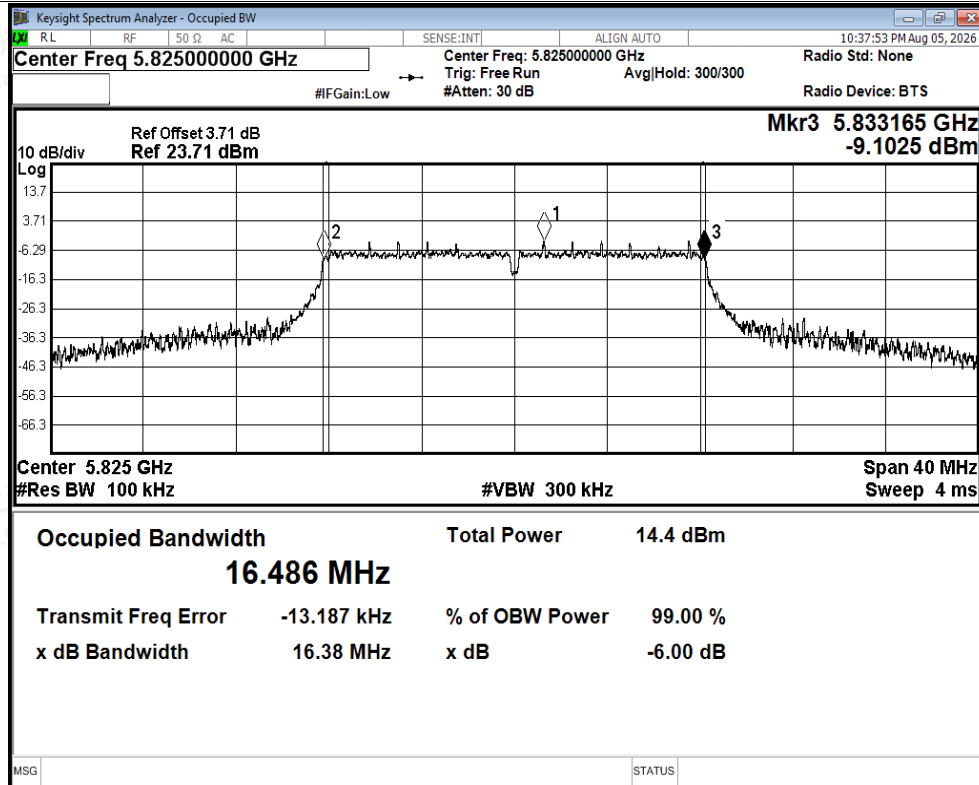


-6dB Bandwidth NVNT a 5825MHz Ant1

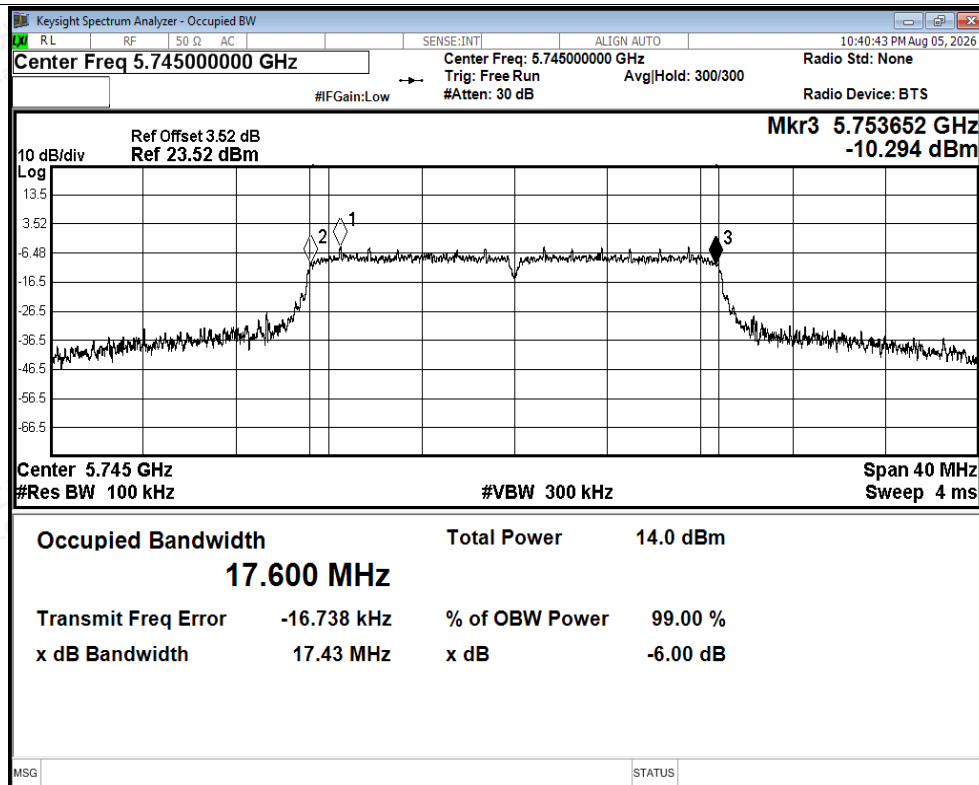


-6dB Bandwidth NVNT n20 5745MHz Ant1

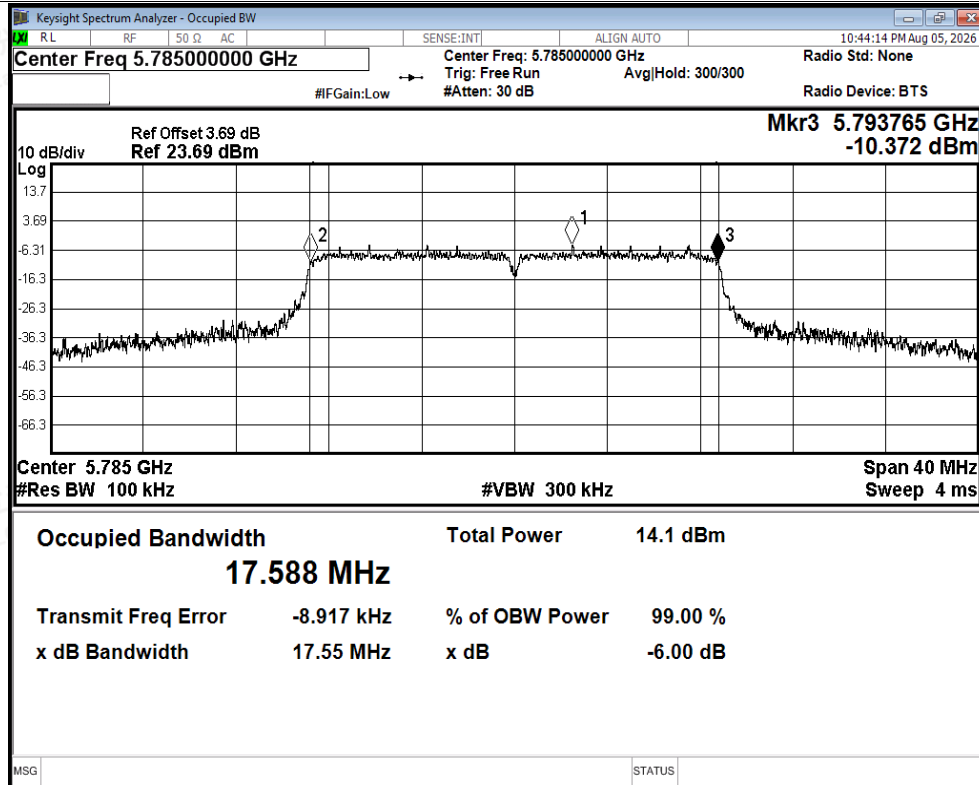


-6dB Bandwidth NVNT n20 5785MHz Ant1

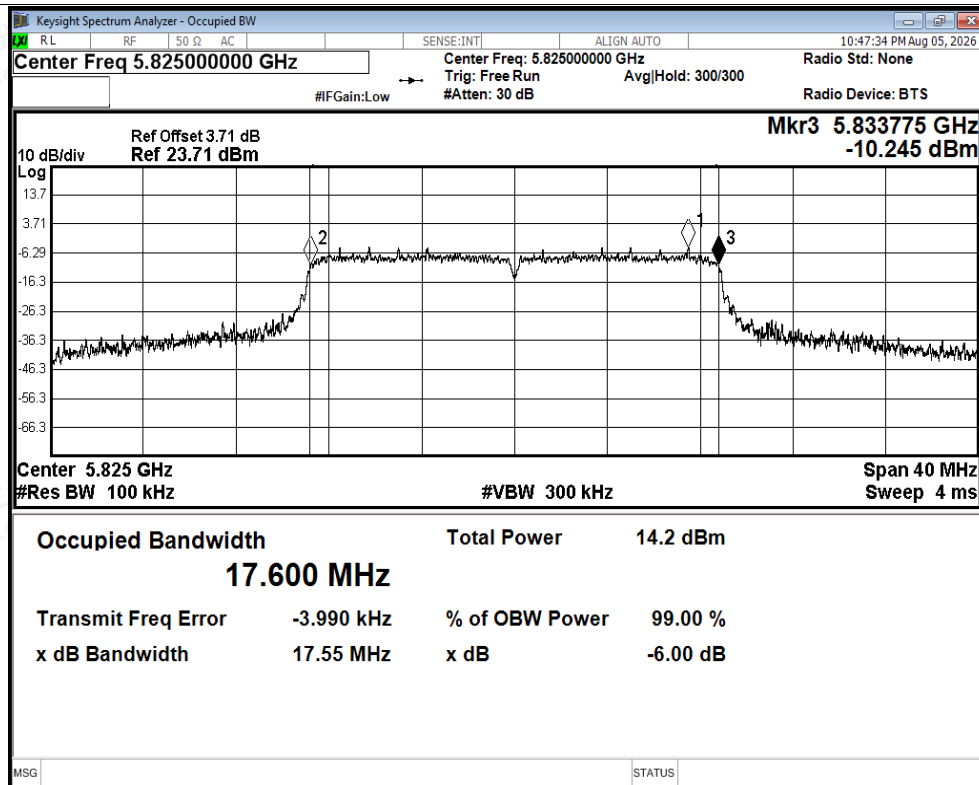


-6dB Bandwidth NVNT n20 5825MHz Ant1

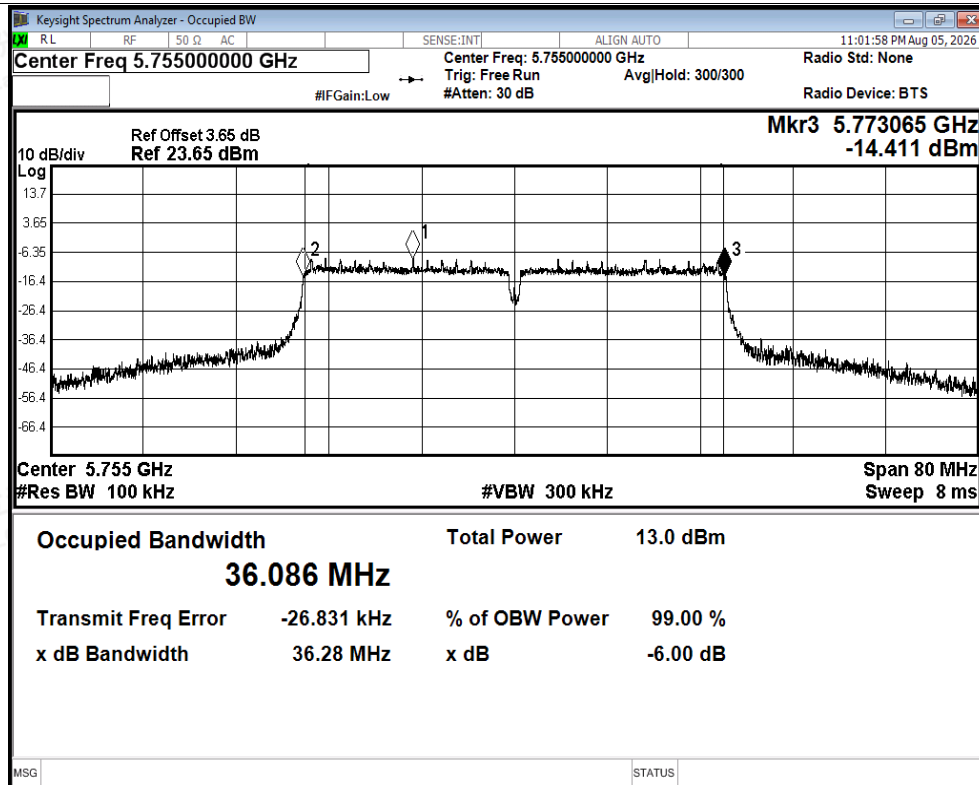


-6dB Bandwidth NVNT n40 5755MHz Ant1

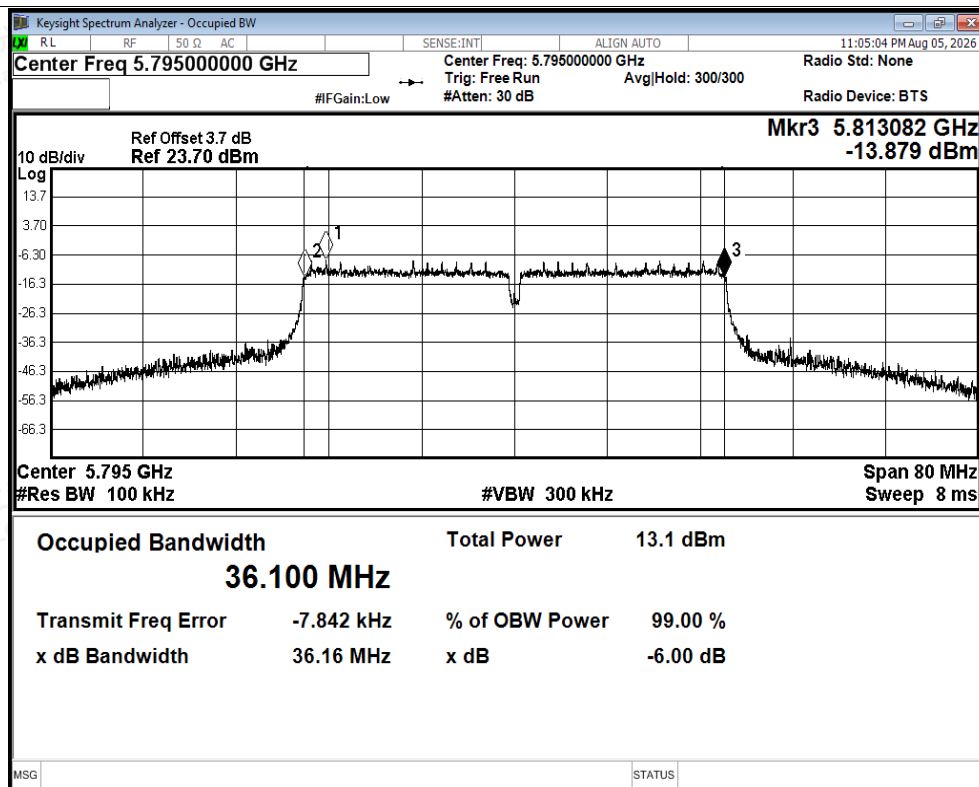


-6dB Bandwidth NVNT n40 5795MHz Ant1

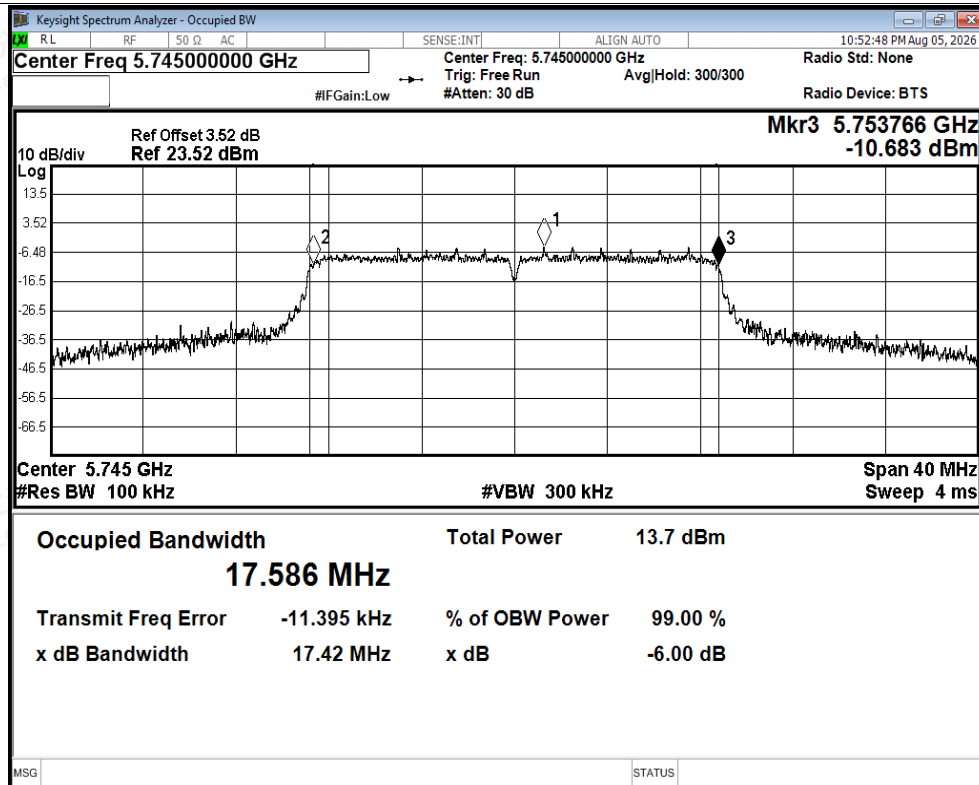


-6dB Bandwidth NVNT ac20 5745MHz Ant1

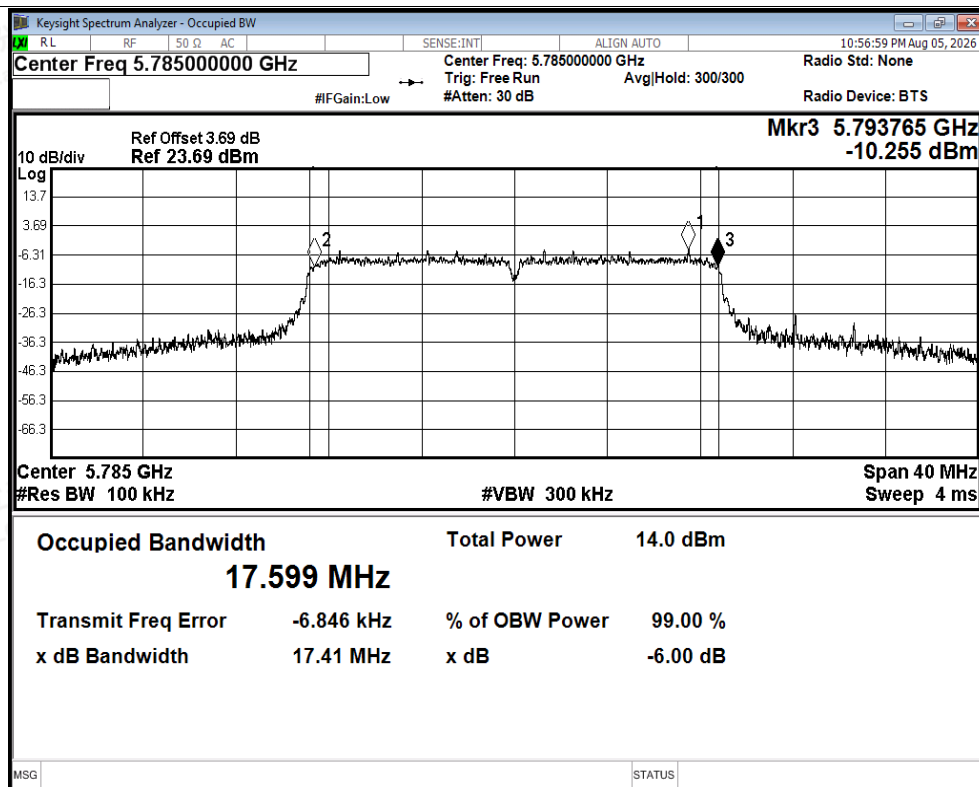


-6dB Bandwidth NVNT ac20 5785MHz Ant1

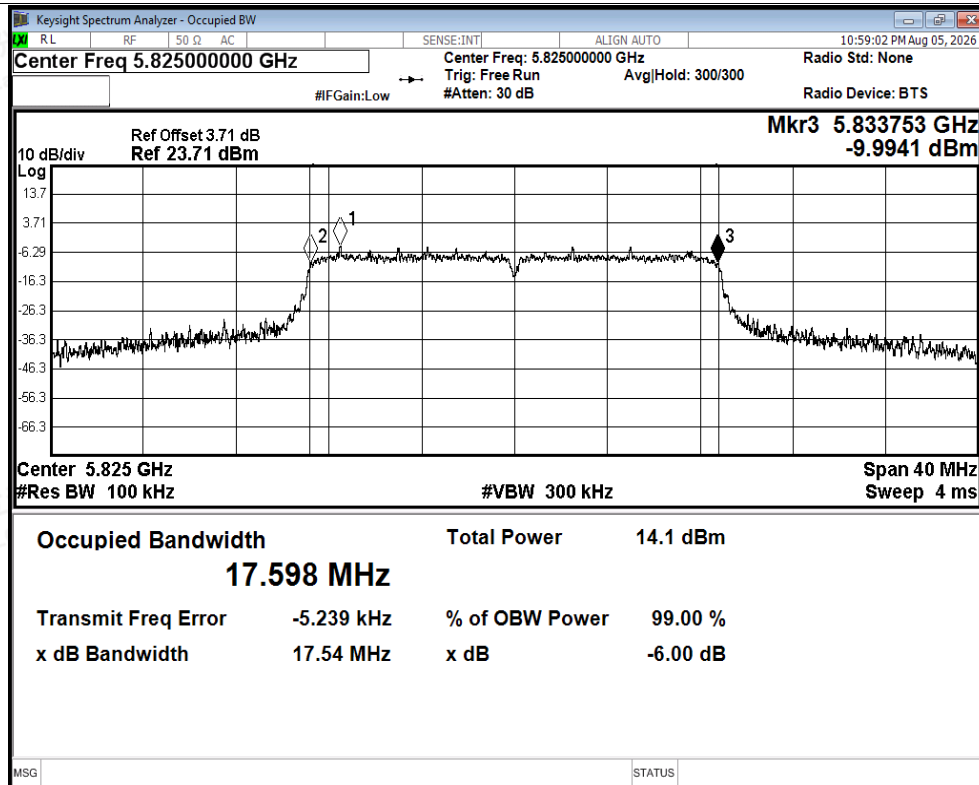


-6dB Bandwidth NVNT ac20 5825MHz Ant1

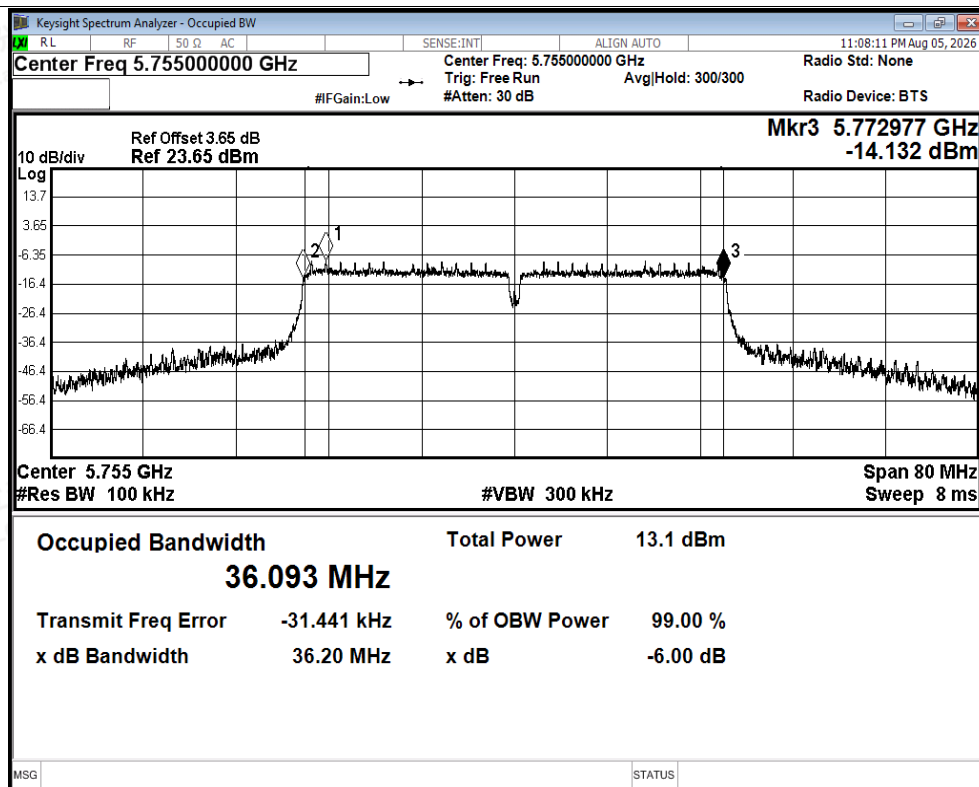

-6dB Bandwidth NVNT ac40 5755MHz Ant1

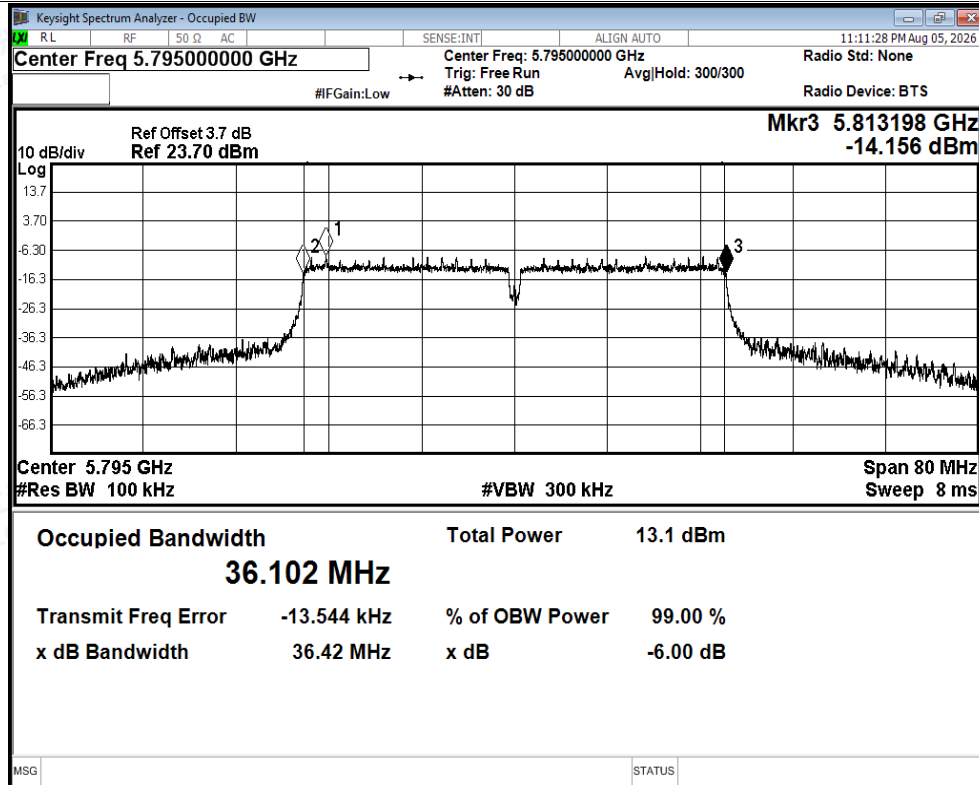


-6dB Bandwidth NVNT ac40 5795MHz Ant1

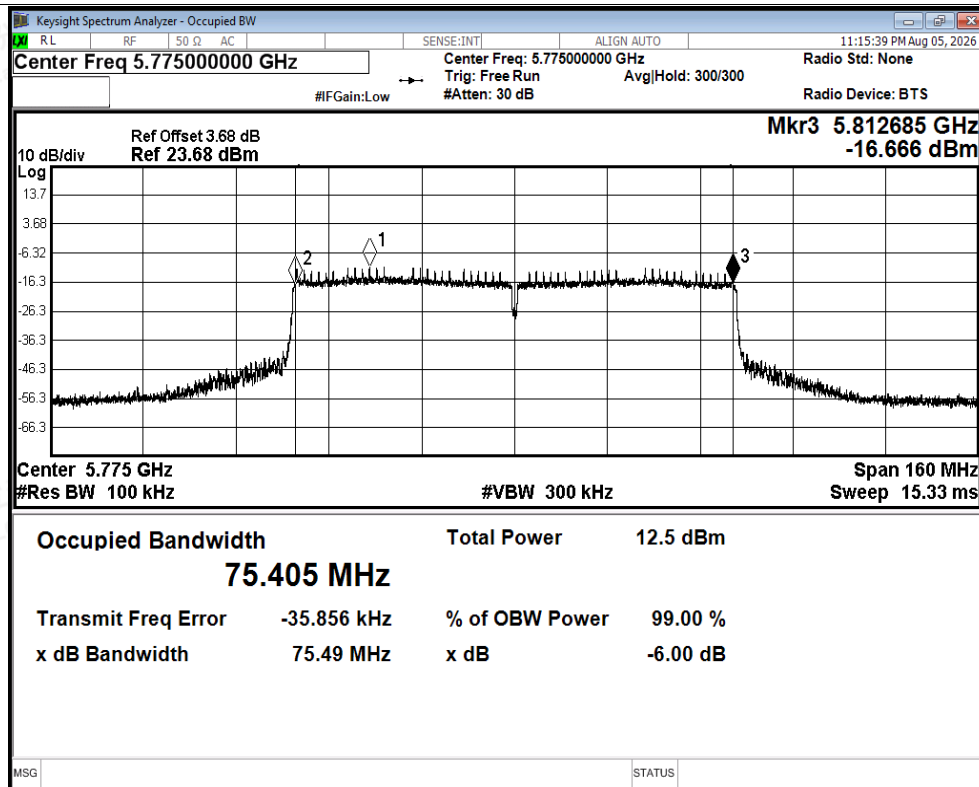


-6dB Bandwidth NVNT ac80 5775MHz Ant1




Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant2	16.34	0.5	Pass
NVNT	a	5785	Ant2	16.36	0.5	Pass
NVNT	a	5825	Ant2	16.35	0.5	Pass
NVNT	n20	5745	Ant2	17.41	0.5	Pass
NVNT	n20	5785	Ant2	17.52	0.5	Pass
NVNT	n20	5825	Ant2	17.55	0.5	Pass
NVNT	n40	5755	Ant2	36.45	0.5	Pass
NVNT	n40	5795	Ant2	36.28	0.5	Pass
NVNT	ac20	5745	Ant2	17.55	0.5	Pass
NVNT	ac20	5785	Ant2	17.54	0.5	Pass
NVNT	ac20	5825	Ant2	17.56	0.5	Pass
NVNT	ac40	5755	Ant2	36.43	0.5	Pass
NVNT	ac40	5795	Ant2	36.29	0.5	Pass
NVNT	ac80	5775	Ant2	75.48	0.5	Pass

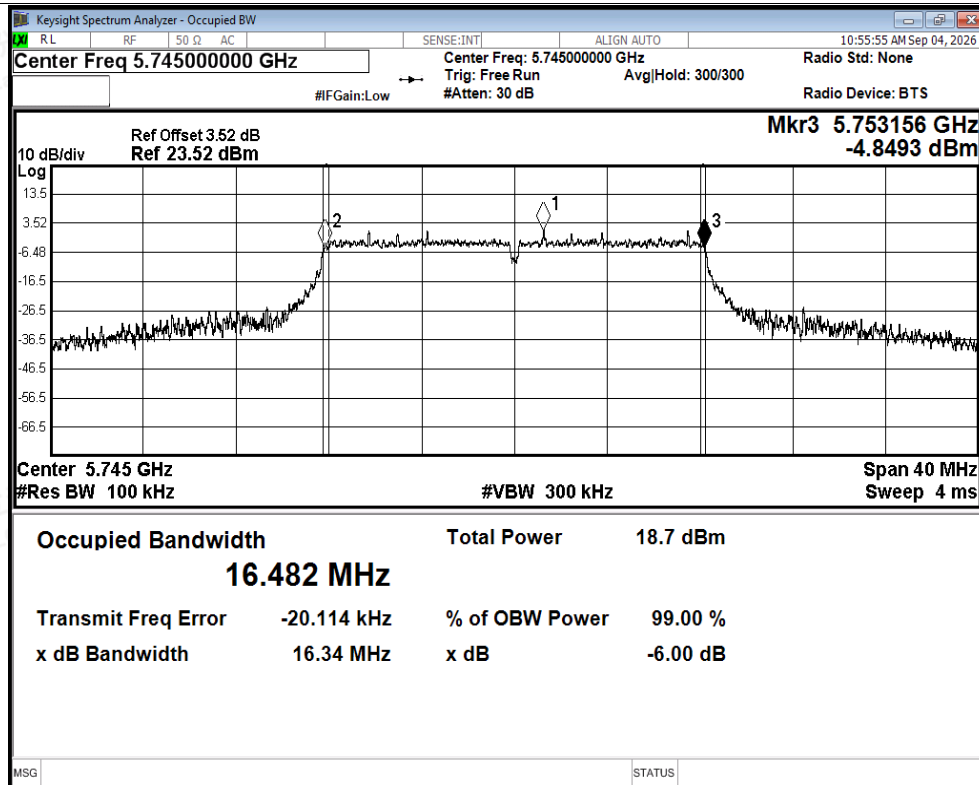


-6dB Bandwidth NVNT a 5745MHz Ant2

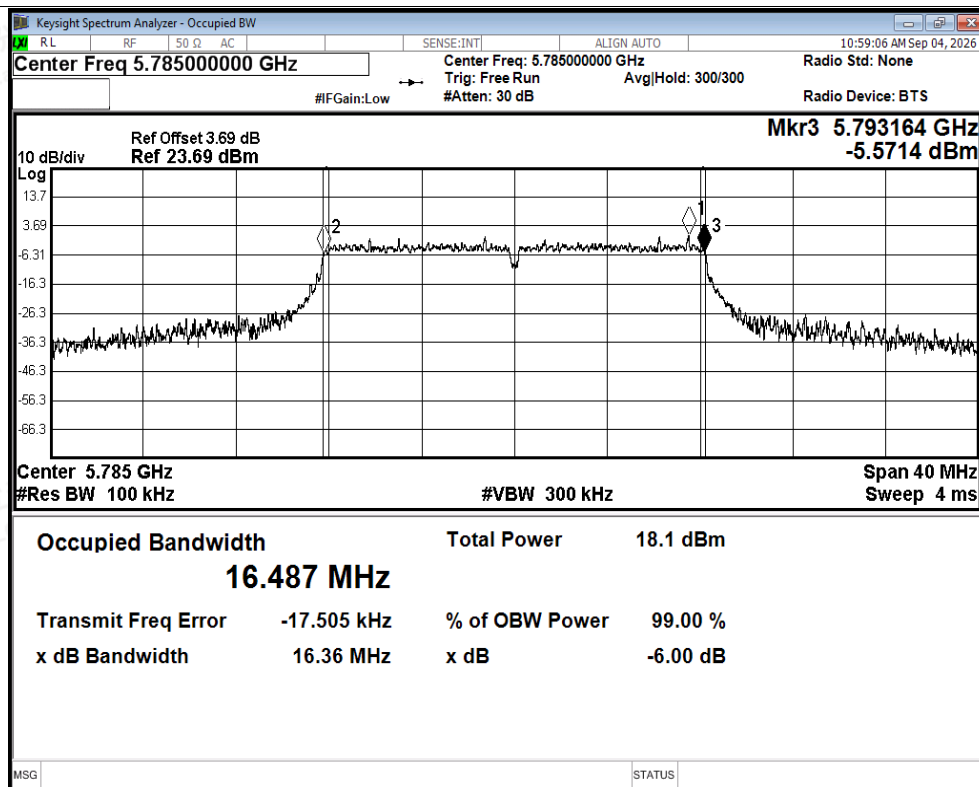


-6dB Bandwidth NVNT a 5785MHz Ant2

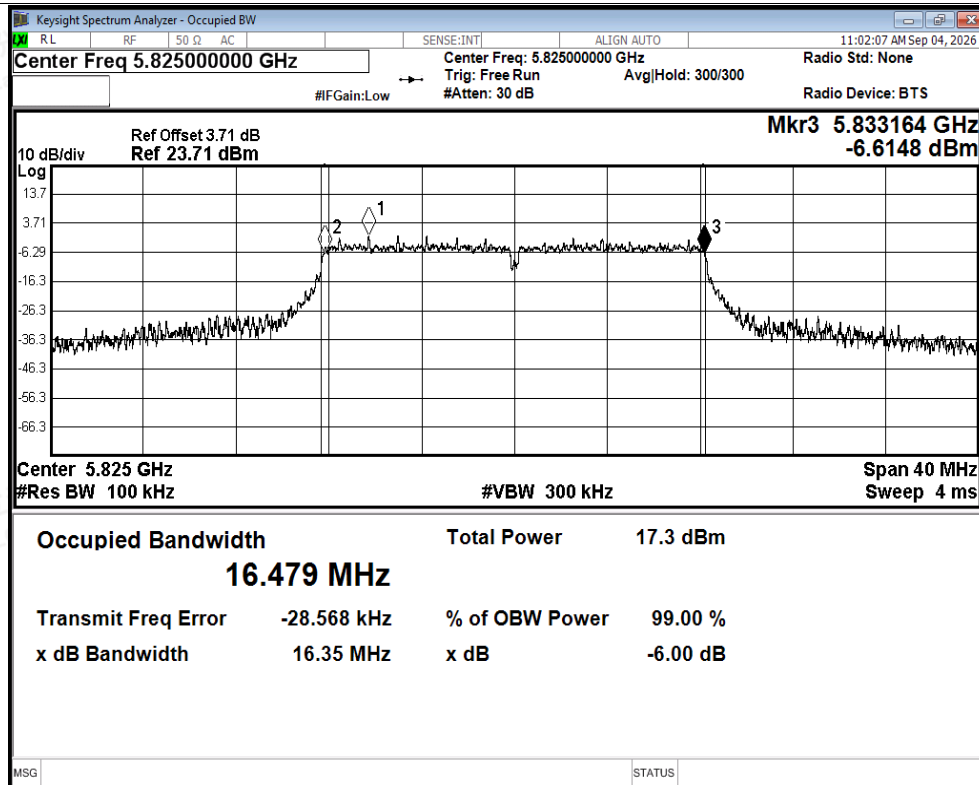


-6dB Bandwidth NVNT a 5825MHz Ant2

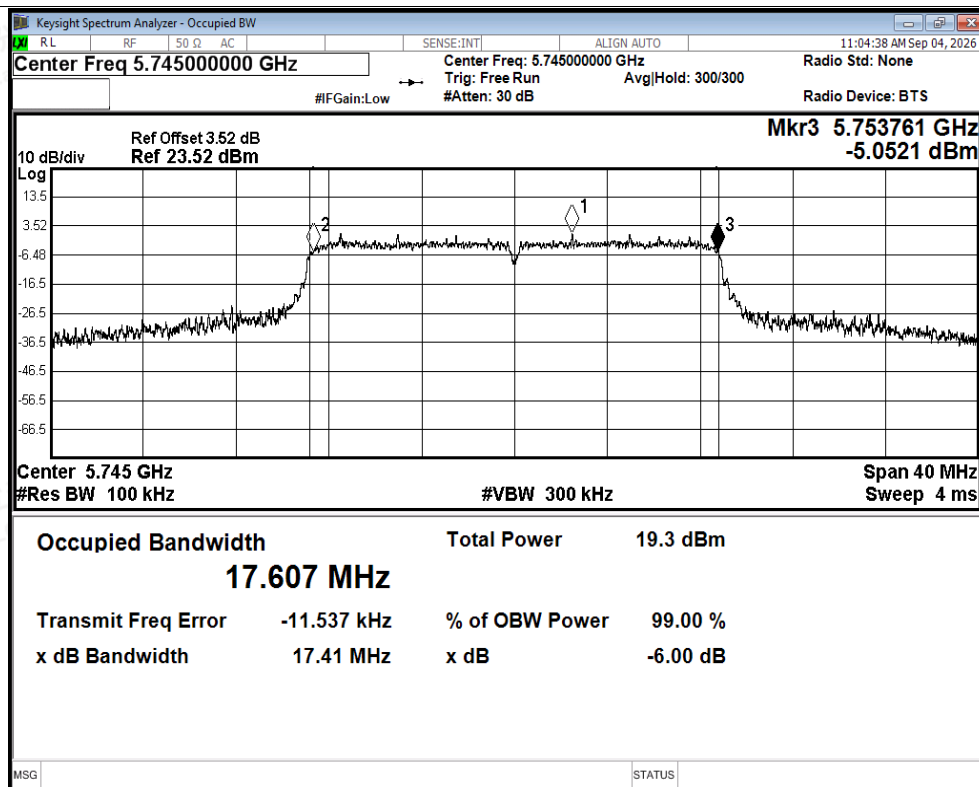


-6dB Bandwidth NVNT n20 5745MHz Ant2

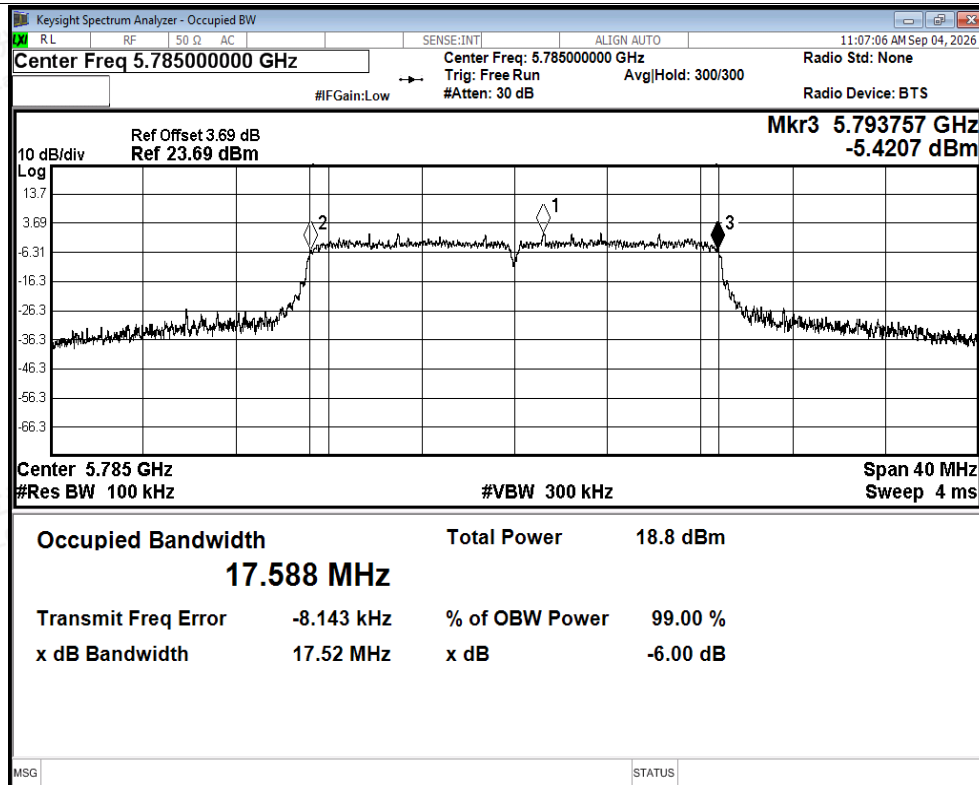


-6dB Bandwidth NVNT n20 5785MHz Ant2

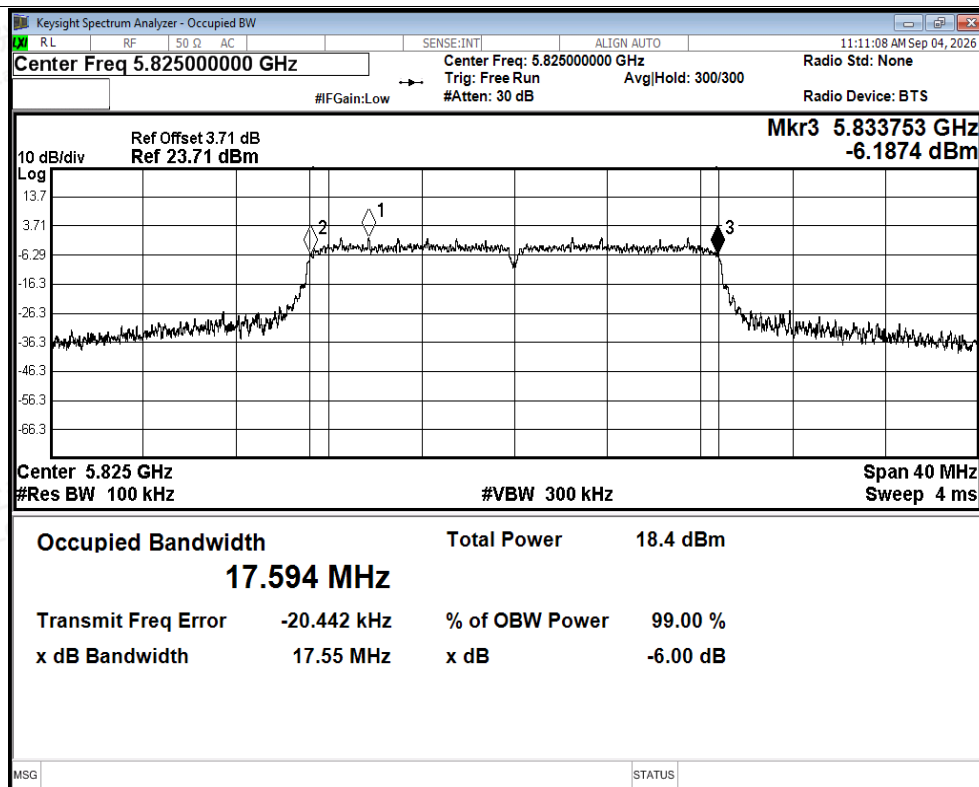


-6dB Bandwidth NVNT n20 5825MHz Ant2

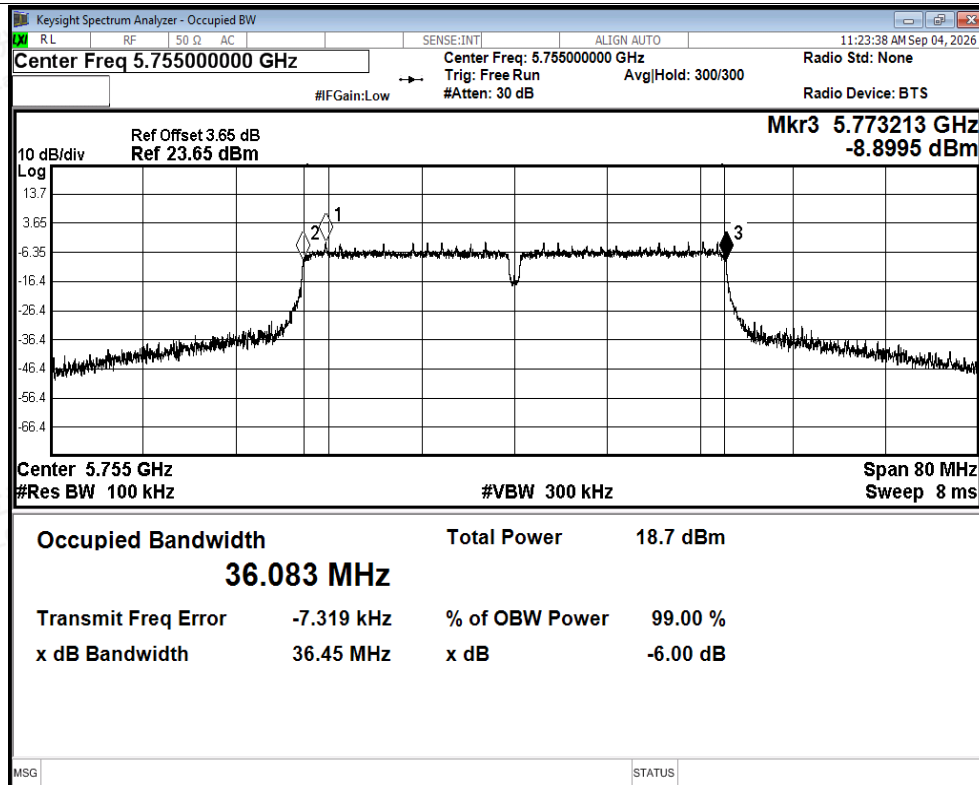


-6dB Bandwidth NVNT n40 5755MHz Ant2

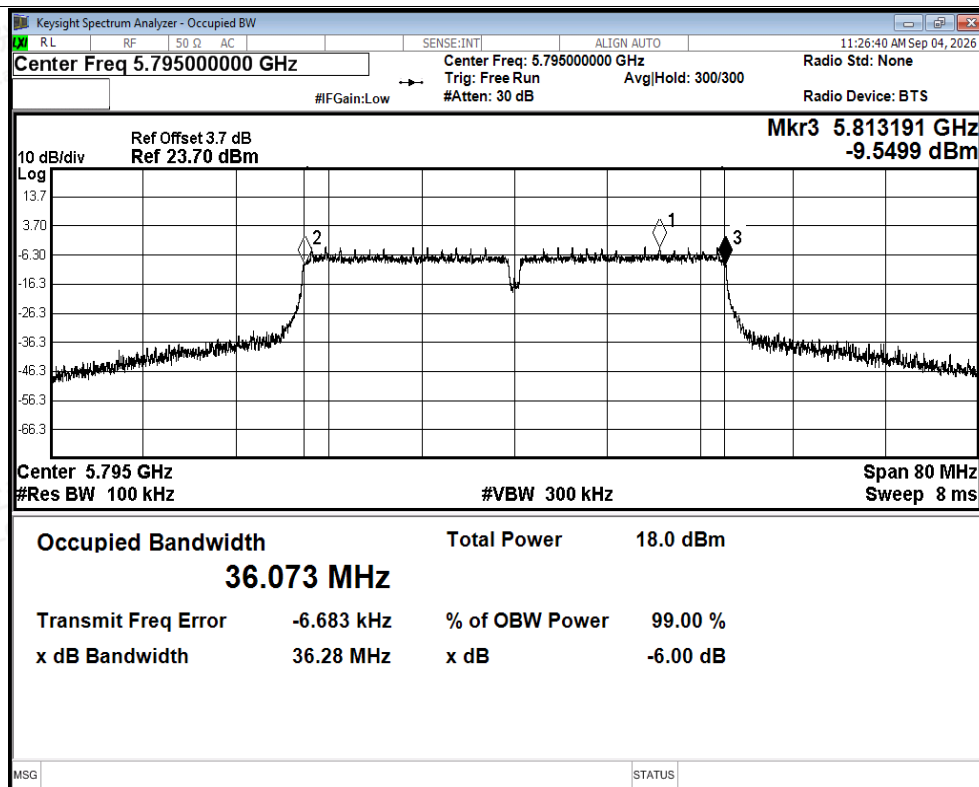


-6dB Bandwidth NVNT n40 5795MHz Ant2

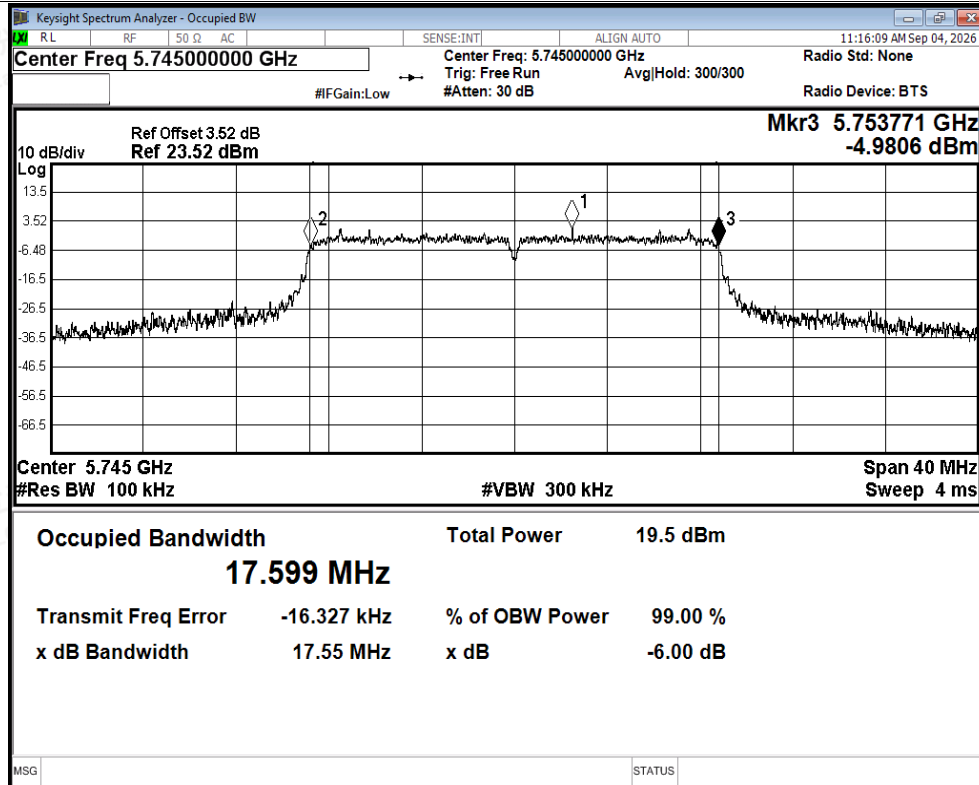


-6dB Bandwidth NVNT ac20 5745MHz Ant2

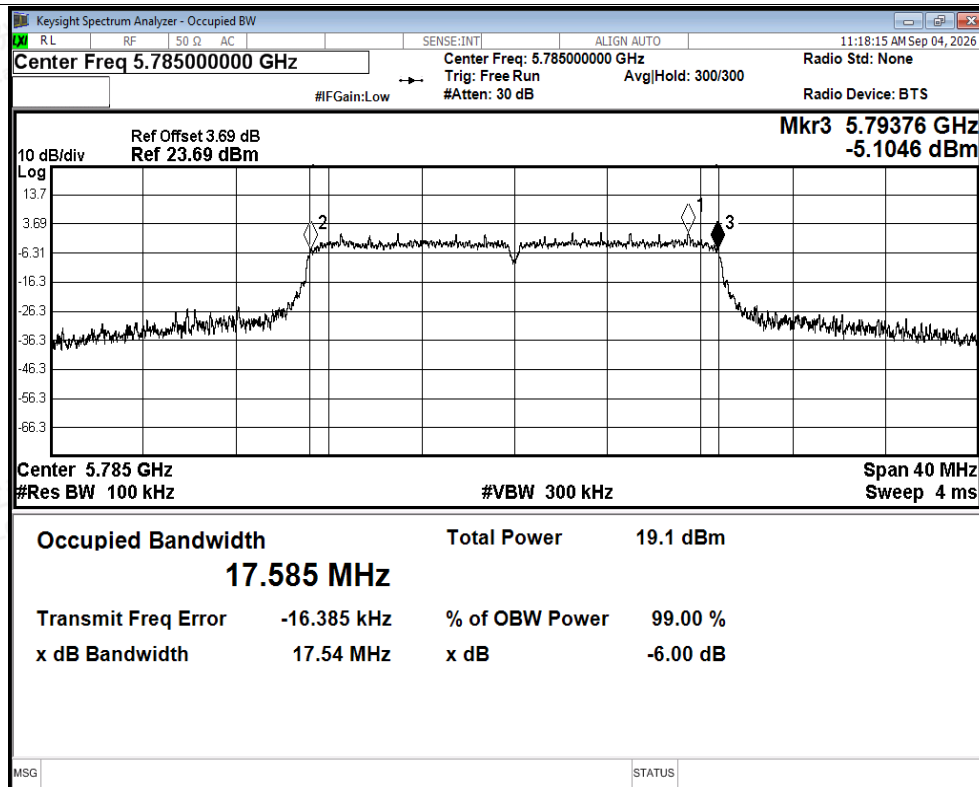


-6dB Bandwidth NVNT ac20 5785MHz Ant2

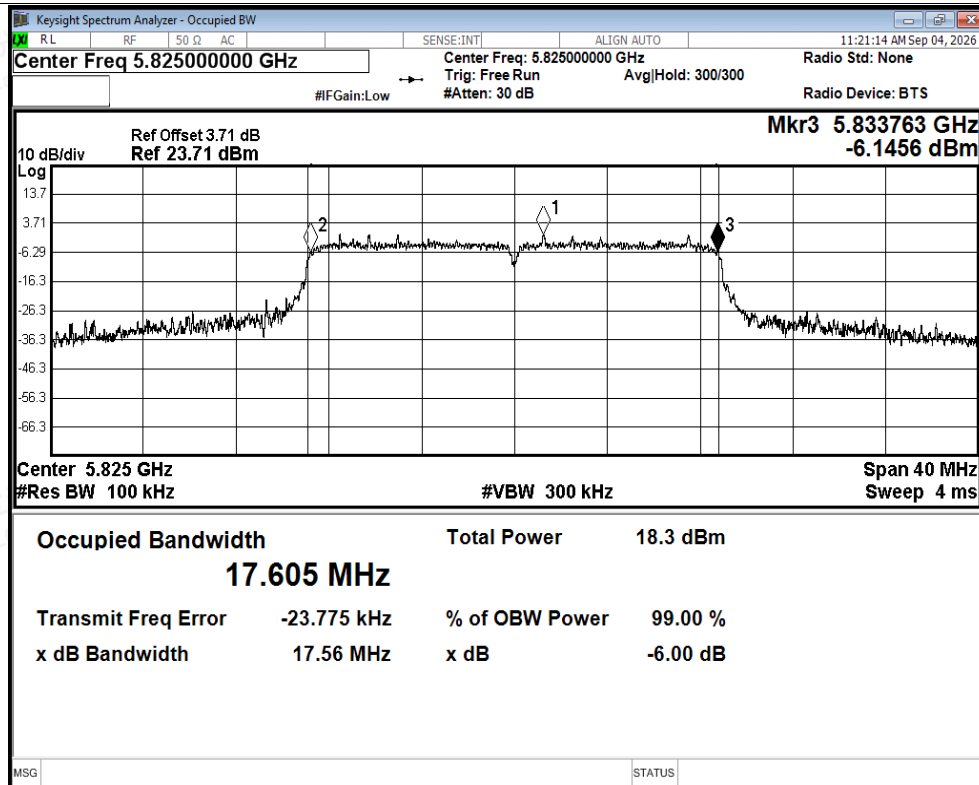


-6dB Bandwidth NVNT ac20 5825MHz Ant2

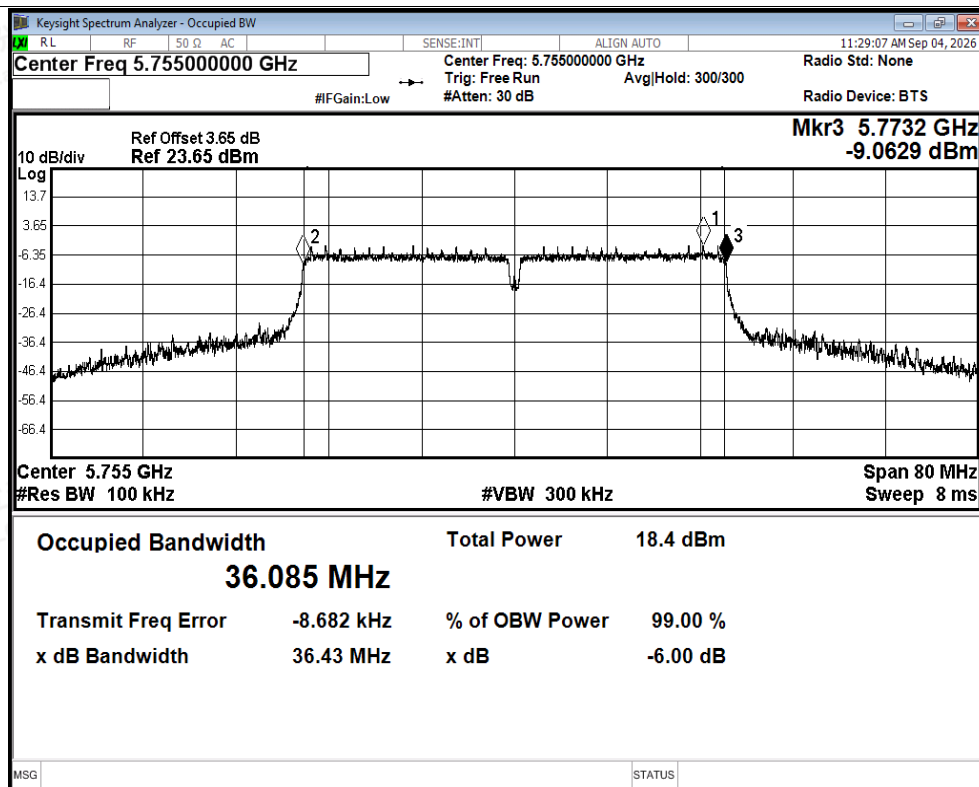

-6dB Bandwidth NVNT ac40 5755MHz Ant2

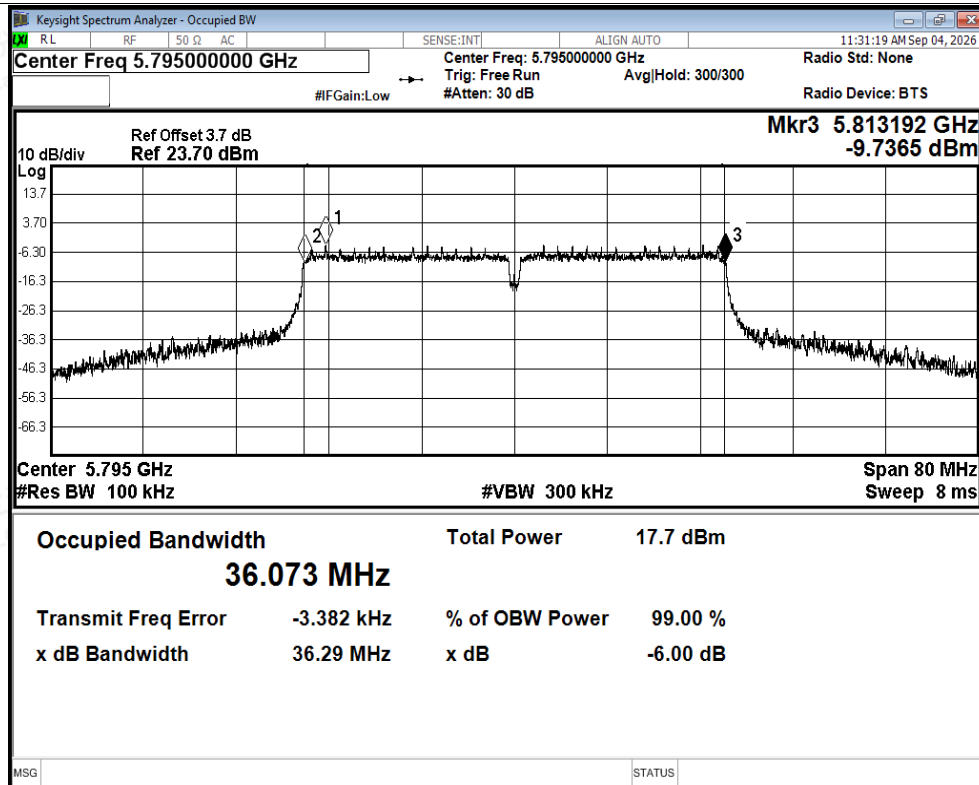

-6dB Bandwidth NVNT ac40 5795MHz Ant2

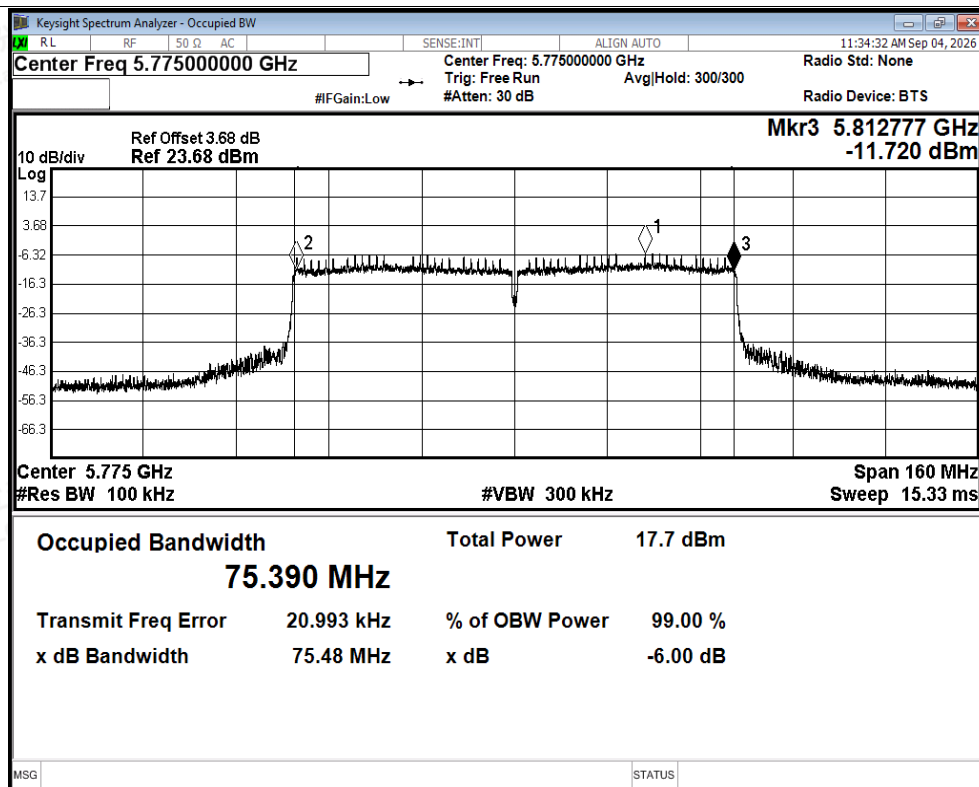

-6dB Bandwidth NVNT ac80 5775MHz Ant2



C.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Limit Conducted(dBm)	Verdict
NVNT	a	5745	Ant1	12.47	0.11	12.58	30	Pass
NVNT	a	5785	Ant1	12.6	0.1	12.7	30	Pass
NVNT	a	5825	Ant1	12.51	0.1	12.61	30	Pass
NVNT	n20	5745	Ant1	11.75	0.11	11.86	30	Pass
NVNT	n20	5785	Ant1	12	0.11	12.11	30	Pass
NVNT	n20	5825	Ant1	12.03	0.11	12.14	30	Pass
NVNT	n40	5755	Ant1	10.87	0.23	11.1	30	Pass
NVNT	n40	5795	Ant1	11.12	0.23	11.35	30	Pass
NVNT	ac20	5745	Ant1	11.59	0.11	11.7	30	Pass
NVNT	ac20	5785	Ant1	11.92	0.11	12.03	30	Pass
NVNT	ac20	5825	Ant1	7.25	0.11	7.36	30	Pass
NVNT	ac40	5755	Ant1	12	0.23	12.23	30	Pass
NVNT	ac40	5795	Ant1	11.09	0.23	11.32	30	Pass
NVNT	ac80	5775	Ant1	10.46	0.46	10.92	30	Pass

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Limit Conducted(dBm)	Verdict
NVNT	a	5745	Ant2	12.22	0.1	12.32	30	Pass
NVNT	a	5785	Ant2	11.65	0.1	11.75	30	Pass
NVNT	a	5825	Ant2	11.02	0.1	11.12	30	Pass
NVNT	n20	5745	Ant2	12.58	0.11	12.69	30	Pass
NVNT	n20	5785	Ant2	11.97	0.11	12.08	30	Pass
NVNT	n20	5825	Ant2	11.53	0.11	11.64	30	Pass
NVNT	n40	5755	Ant2	11.68	0.27	11.95	30	Pass
NVNT	n40	5795	Ant2	10.98	0.23	11.21	30	Pass
NVNT	ac20	5745	Ant2	12.66	0.11	12.77	30	Pass
NVNT	ac20	5785	Ant2	12.27	0.11	12.38	30	Pass
NVNT	ac20	5825	Ant2	11.51	0.11	11.62	30	Pass
NVNT	ac40	5755	Ant2	11.5	0.23	11.73	30	Pass
NVNT	ac40	5795	Ant2	10.63	0.23	10.86	30	Pass
NVNT	ac80	5775	Ant2	10.56	0.46	11.02	30	Pass

**MIMO**

Condition	Mode	Frequency (MHz)	Total Power (dBm)			Limit (dBm)	Verdict
			Ant1	Ant2	Ant1+Ant2		
NVNT	n20	5745	11.86	12.69	15.31	30	Pass
NVNT	n20	5785	12.11	12.08	15.11	30	Pass
NVNT	n20	5825	12.14	11.64	14.91	30	Pass
NVNT	n40	5755	11.1	11.95	14.56	30	Pass
NVNT	n40	5795	11.35	11.21	14.29	30	Pass
NVNT	ac20	5745	11.7	12.77	15.28	30	Pass
NVNT	ac20	5785	12.03	12.38	15.22	30	Pass
NVNT	ac20	5825	7.36	11.62	13.00	30	Pass
NVNT	ac40	5755	12.23	11.73	15.00	30	Pass
NVNT	ac40	5795	11.32	10.86	14.11	30	Pass
NVNT	ac80	5775	10.92	11.02	13.98	30	Pass




C.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/500KHz)	Duty Factor (dB)	Total PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	a	5745	Ant1	-5.65	0.11	-5.53	30	Pass
NVNT	a	5785	Ant1	-6.09	0.1	-5.99	30	Pass
NVNT	a	5825	Ant1	-6.1	0.1	-6	30	Pass
NVNT	n20	5745	Ant1	-7.41	0.11	-7.3	30	Pass
NVNT	n20	5785	Ant1	-7.02	0.11	-6.91	30	Pass
NVNT	n20	5825	Ant1	-6.9	0.11	-6.79	30	Pass
NVNT	n40	5755	Ant1	-11.28	0.23	-11.05	30	Pass
NVNT	n40	5795	Ant1	-11.3	0.23	-11.07	30	Pass
NVNT	ac20	5745	Ant1	-7.43	0.11	-7.32	30	Pass
NVNT	ac20	5785	Ant1	-7.16	0.11	-7.05	30	Pass
NVNT	ac20	5825	Ant1	-7.06	0.11	-6.95	30	Pass
NVNT	ac40	5755	Ant1	-11.14	0.23	-10.91	30	Pass
NVNT	ac40	5795	Ant1	-11.08	0.23	-10.85	30	Pass
NVNT	ac80	5775	Ant1	-14.96	0.46	-14.5	30	Pass


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/500KHz)	Duty Factor (dB)	Total PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	a	5745	Ant2	-1.91	0.1	-1.81	30	Pass
NVNT	a	5785	Ant2	-2.34	0.1	-2.24	30	Pass
NVNT	a	5825	Ant2	-3.01	0.1	-2.91	30	Pass
NVNT	n20	5745	Ant2	-1.8	0.11	-1.69	30	Pass
NVNT	n20	5785	Ant2	-2.18	0.11	-2.07	30	Pass
NVNT	n20	5825	Ant2	-2.78	0.11	-2.67	30	Pass
NVNT	n40	5755	Ant2	-5.63	0.27	-5.36	30	Pass
NVNT	n40	5795	Ant2	-6.44	0.23	-6.21	30	Pass
NVNT	ac20	5745	Ant2	-1.72	0.11	-1.61	30	Pass
NVNT	ac20	5785	Ant2	-2.03	0.11	-1.91	30	Pass
NVNT	ac20	5825	Ant2	-2.91	0.11	-2.8	30	Pass
NVNT	ac40	5755	Ant2	-5.83	0.23	-5.6	30	Pass
NVNT	ac40	5795	Ant2	-6.62	0.23	-6.39	30	Pass
NVNT	ac80	5775	Ant2	-9.7	0.46	-9.24	30	Pass

**MIMO**


Condition	Mode	Frequency (MHz)	Total PSD (dBm/500KHz)			Limit (dBm/500KHz)	Verdict
			Ant1	Ant2	Ant1+Ant2		
NVNT	n20	5745	-7.3	-1.69	-0.64	29.05	Pass
NVNT	n20	5785	-6.91	-2.07	-0.84	29.05	Pass
NVNT	n20	5825	-6.79	-2.67	-1.25	29.05	Pass
NVNT	n40	5755	-11.05	-5.36	-4.32	29.05	Pass
NVNT	n40	5795	-11.07	-6.21	-4.98	29.05	Pass
NVNT	ac20	5745	-7.32	-1.61	-0.58	29.05	Pass
NVNT	ac20	5785	-7.05	-1.91	-0.75	29.05	Pass
NVNT	ac20	5825	-6.95	-2.8	-1.39	29.05	Pass
NVNT	ac40	5755	-10.91	-5.6	-4.48	29.05	Pass
NVNT	ac40	5795	-10.85	-6.39	-5.06	29.05	Pass
NVNT	ac80	5775	-14.5	-9.24	-8.11	29.05	Pass

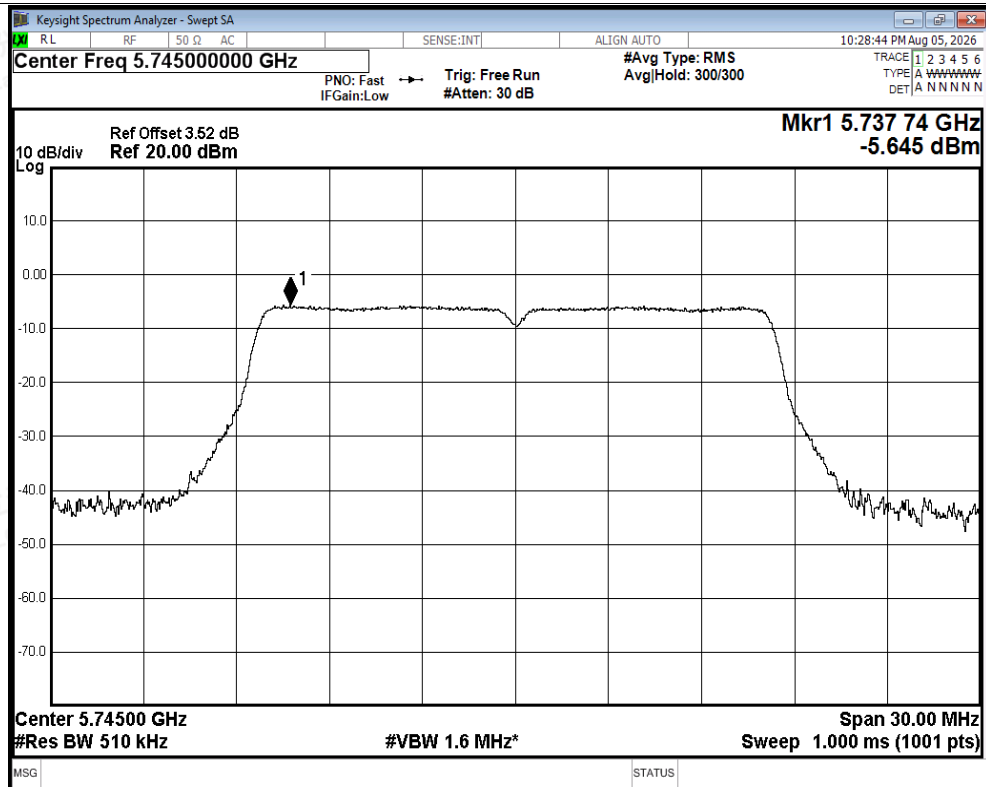


PSD NVNT a 5745MHz Ant1

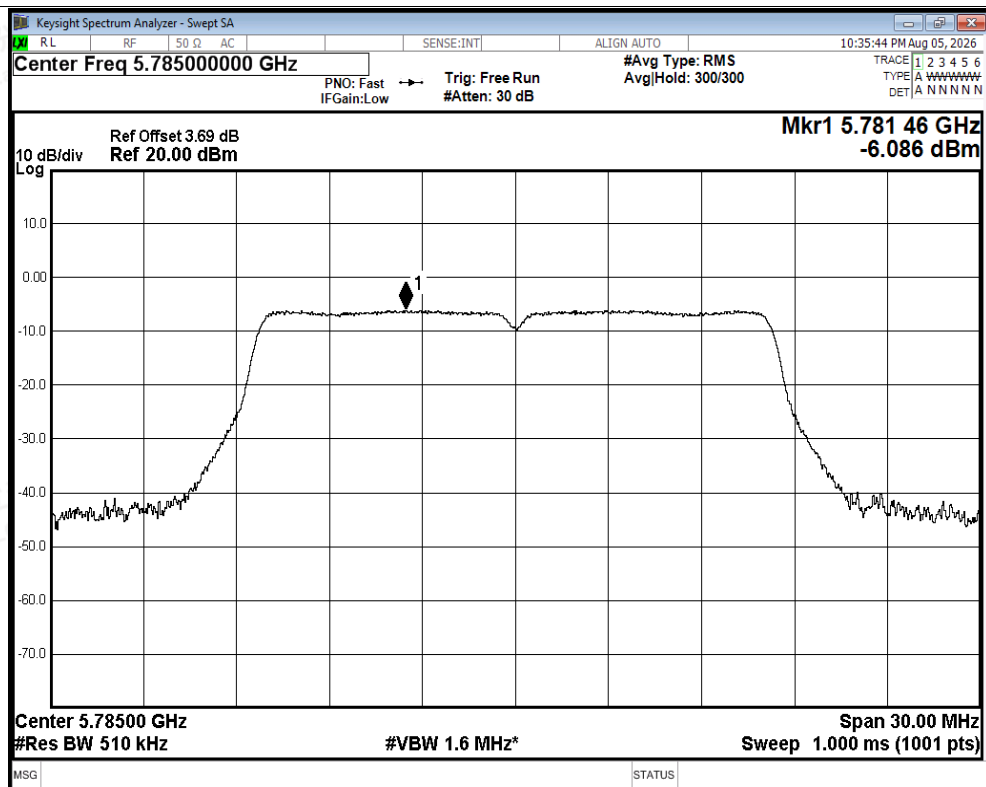


PSD NVNT a 5785MHz Ant1

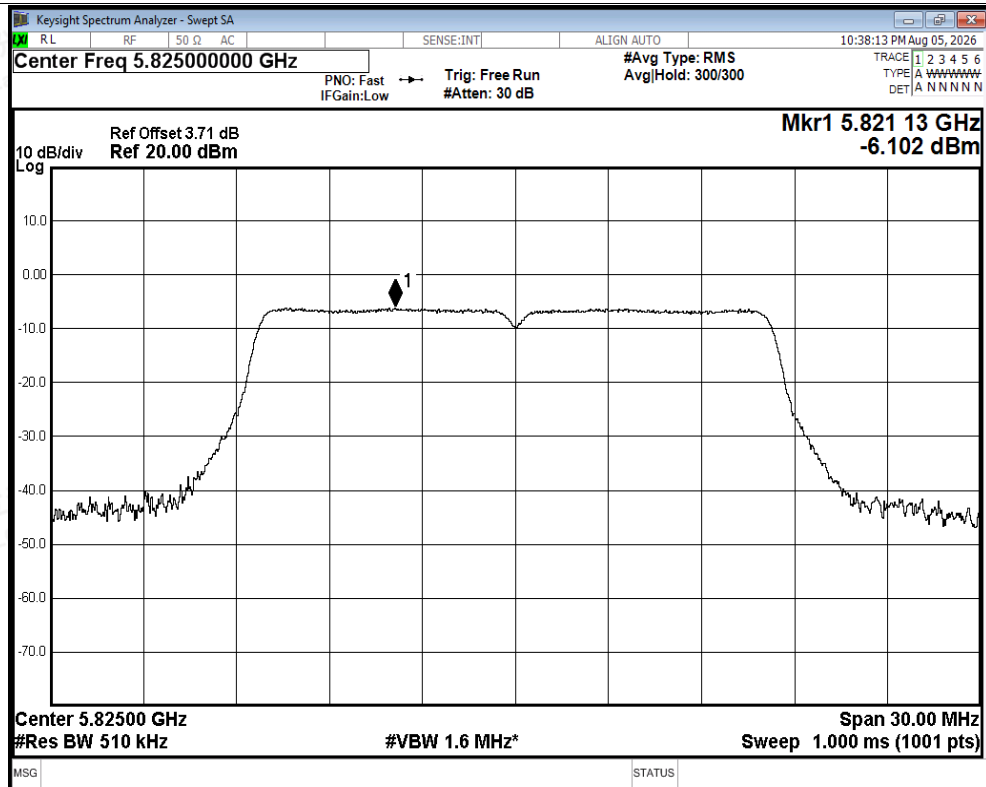


PSD NVNT a 5825MHz Ant1

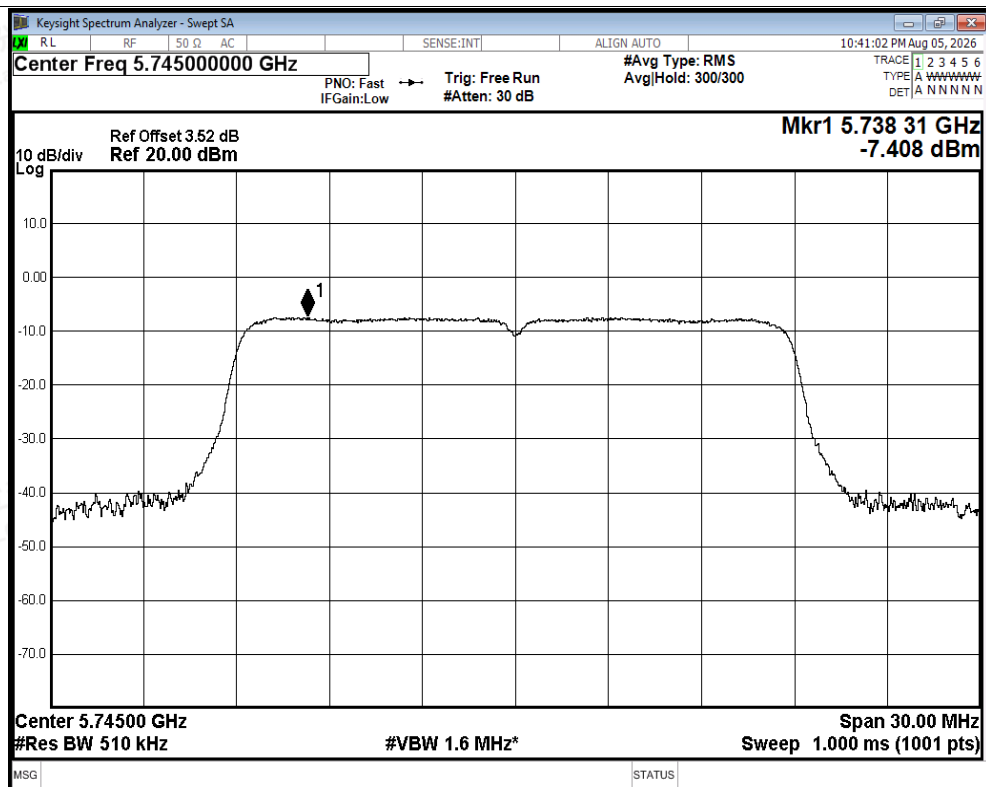


PSD NVNT n20 5745MHz Ant1

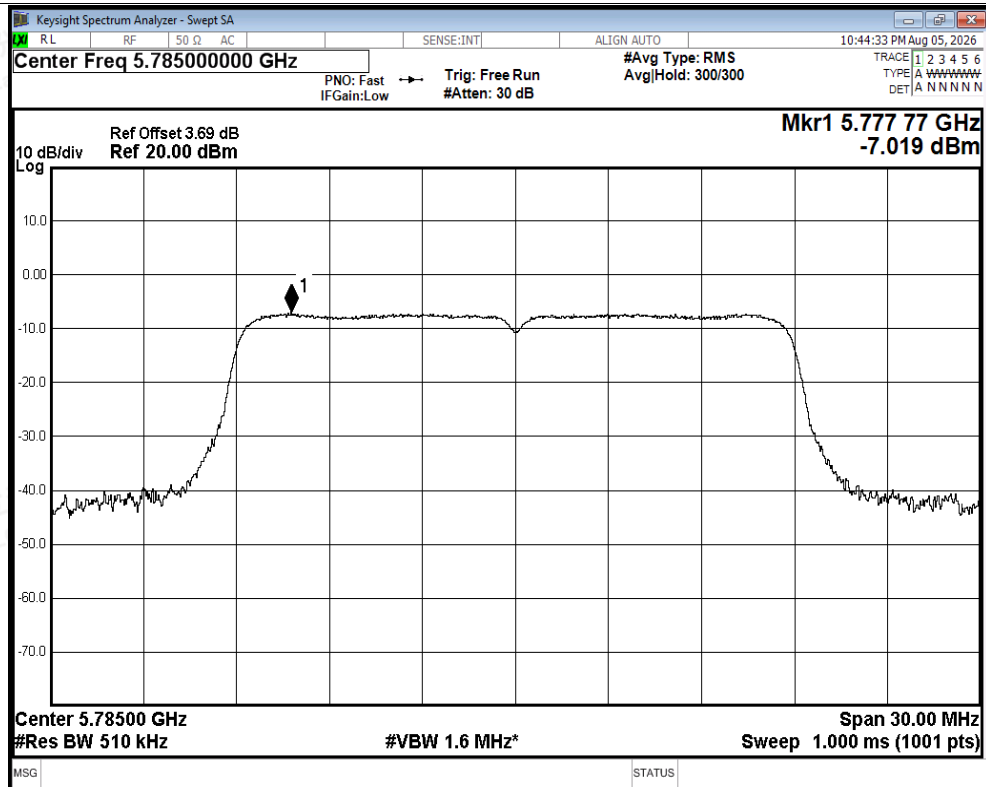


PSD NVNT n20 5785MHz Ant1

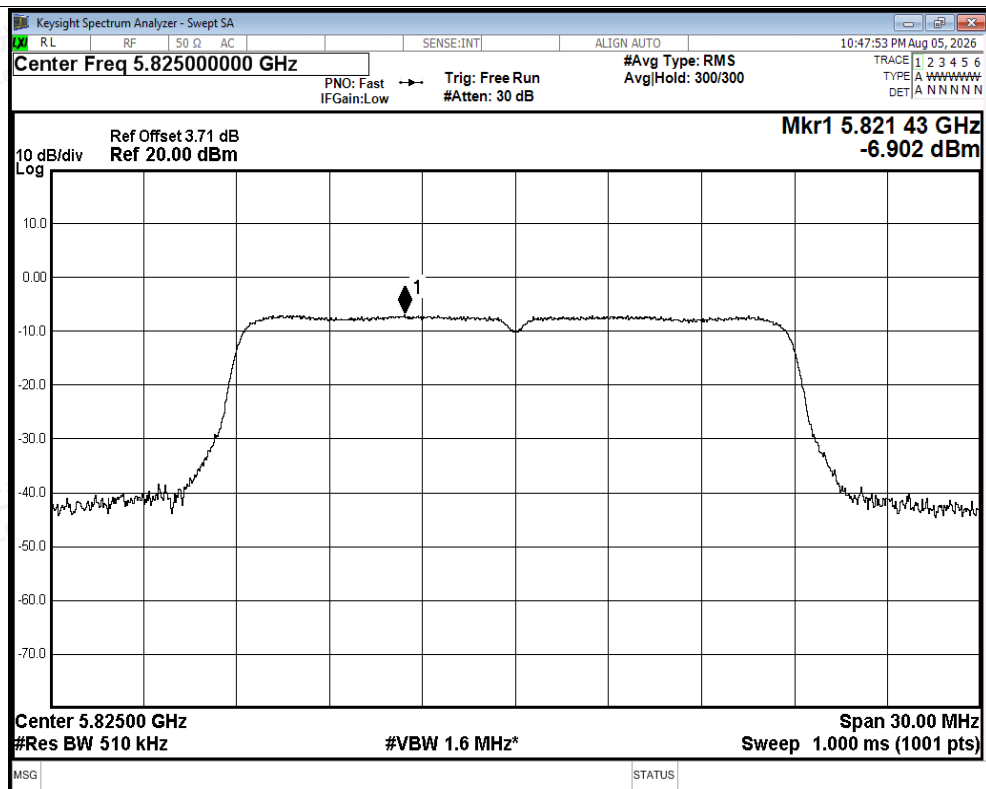


PSD NVNT n20 5825MHz Ant1

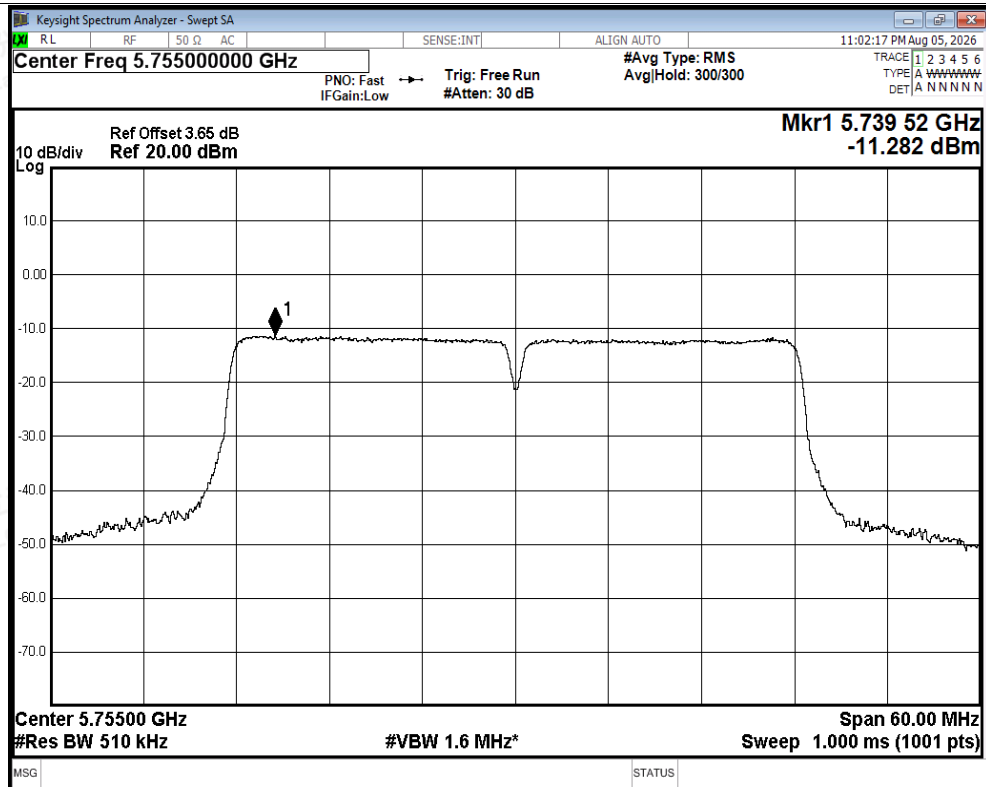


PSD NVNT n40 5755MHz Ant1

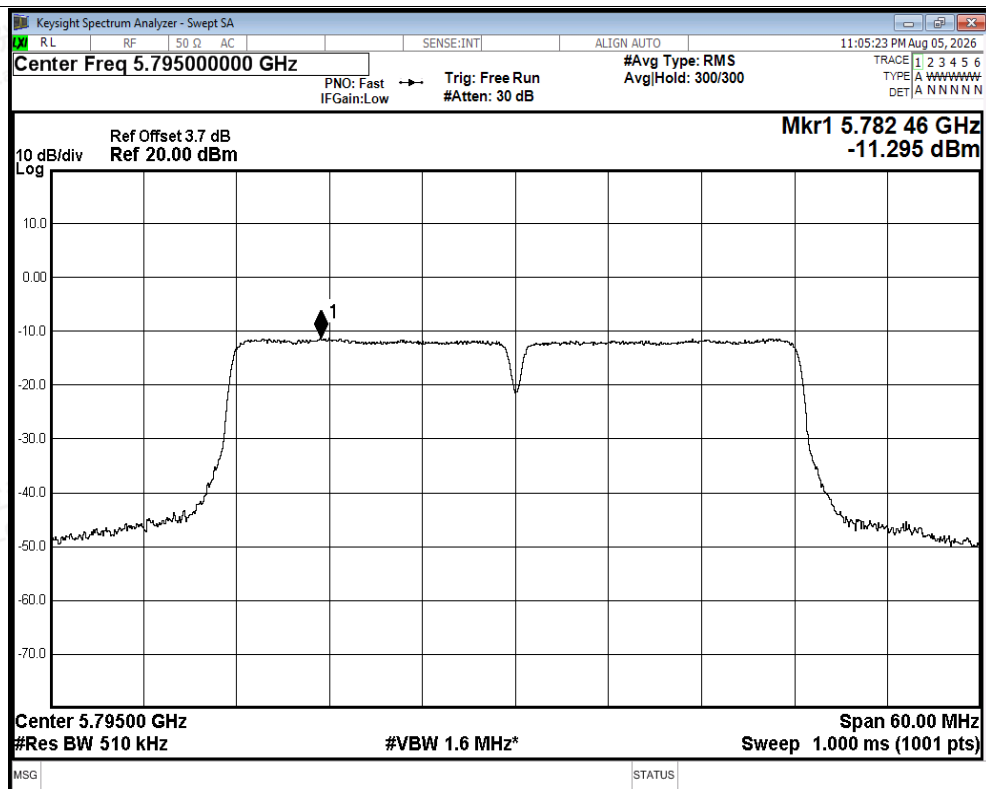


PSD NVNT n40 5795MHz Ant1

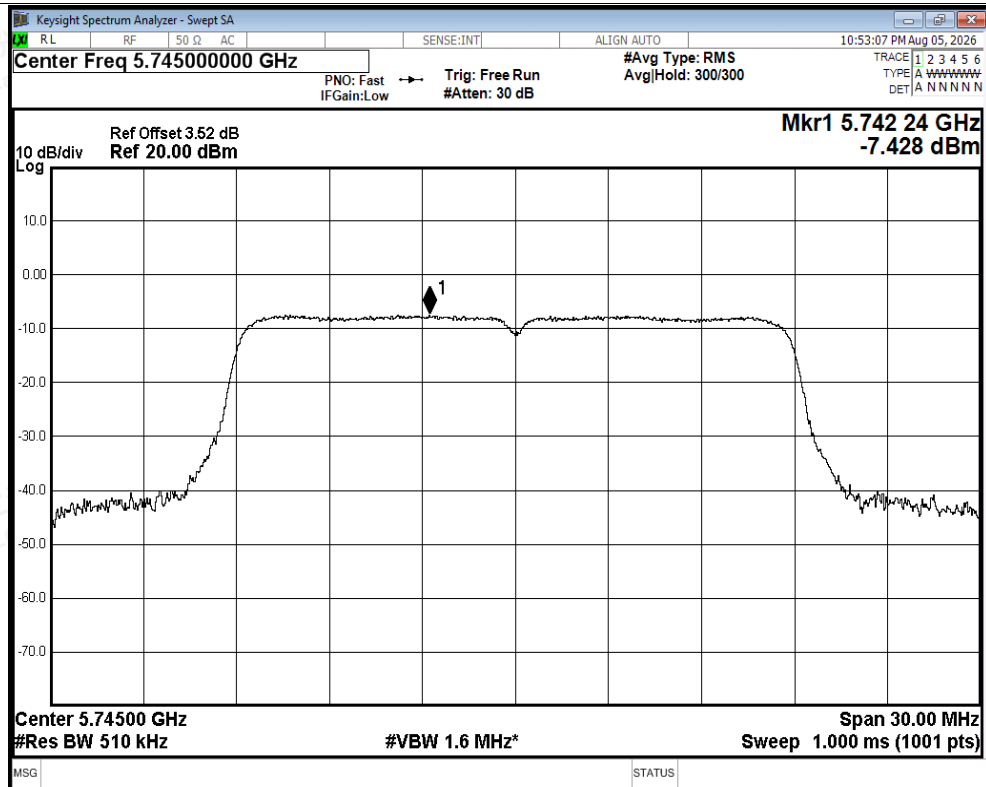


PSD NVNT ac20 5745MHz Ant1

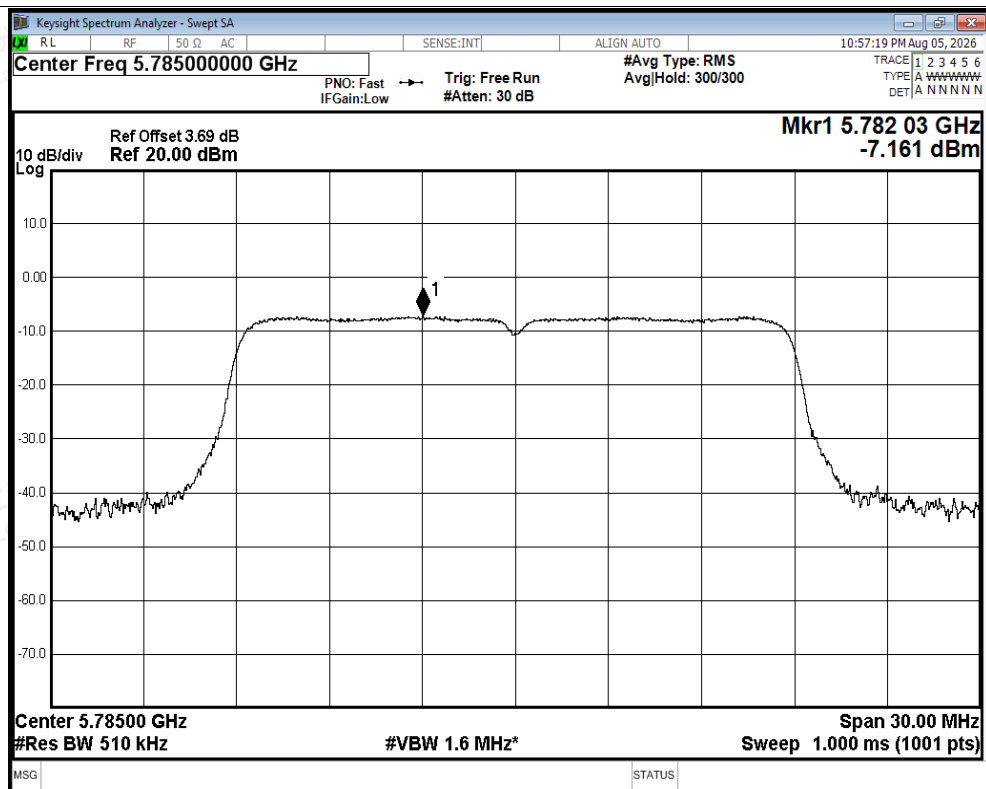


PSD NVNT ac20 5785MHz Ant1

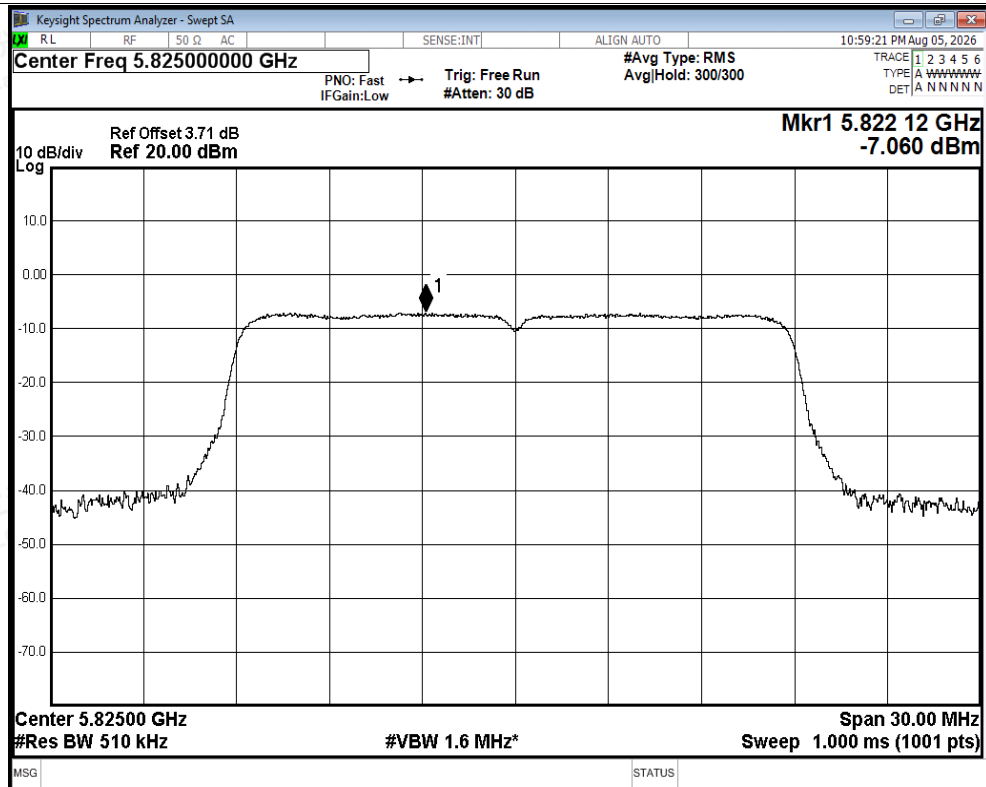


PSD NVNT ac20 5825MHz Ant1

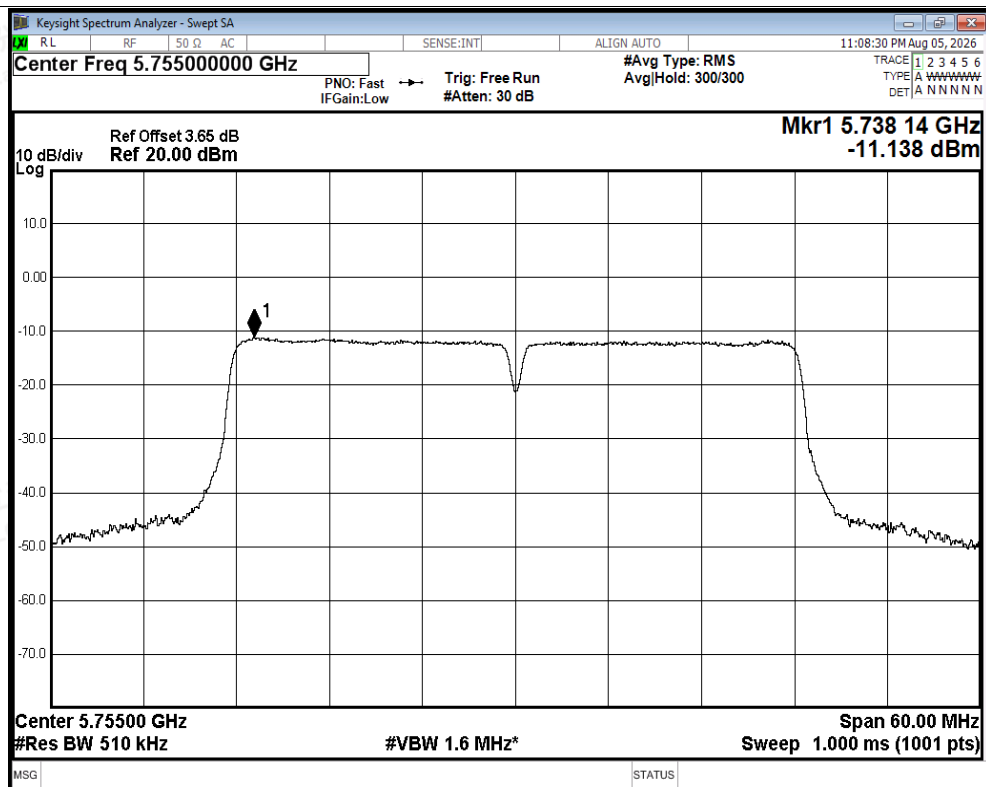


PSD NVNT ac40 5755MHz Ant1

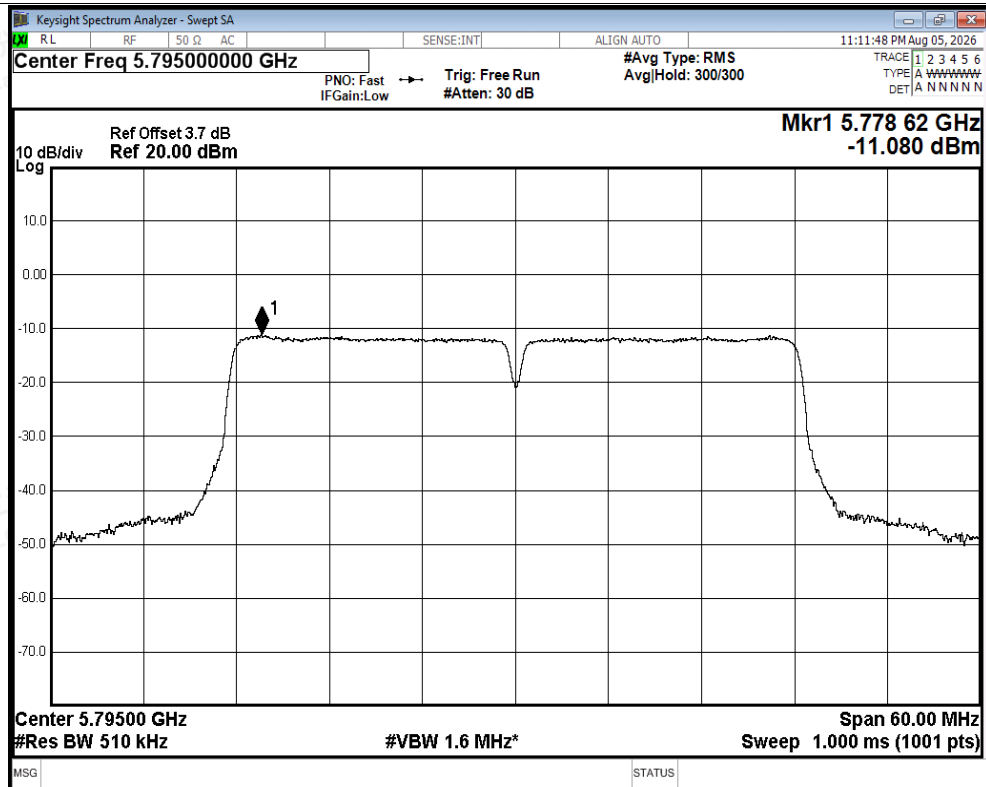


PSD NVNT ac40 5795MHz Ant1

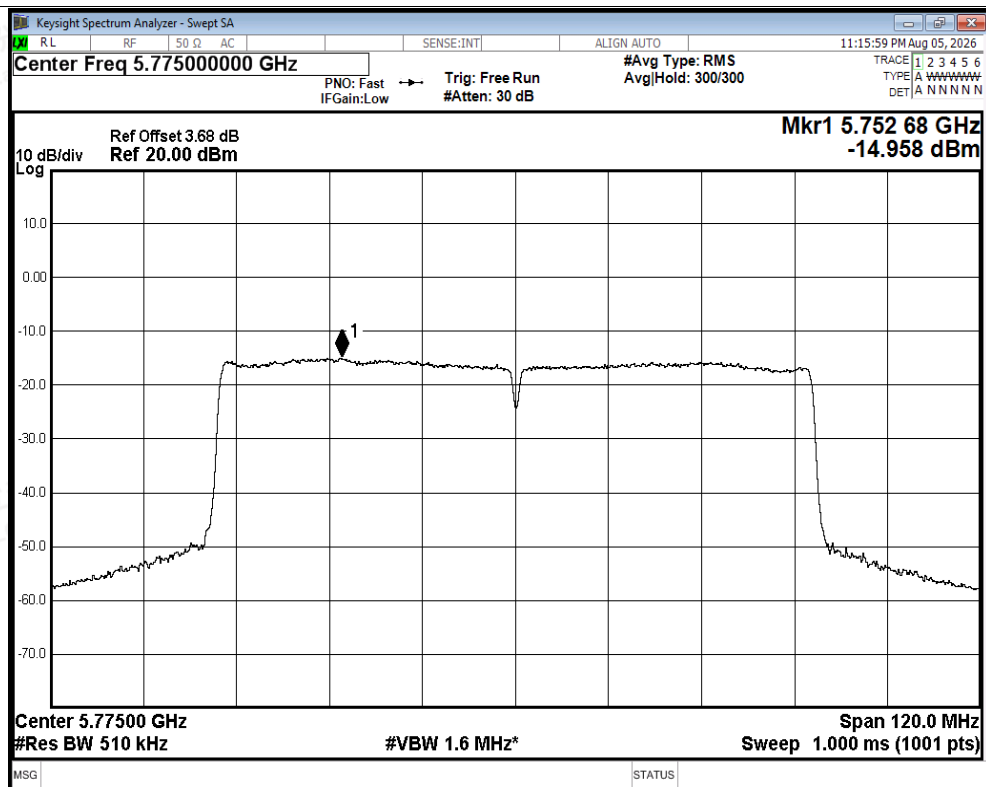


PSD NVNT ac80 5775MHz Ant1

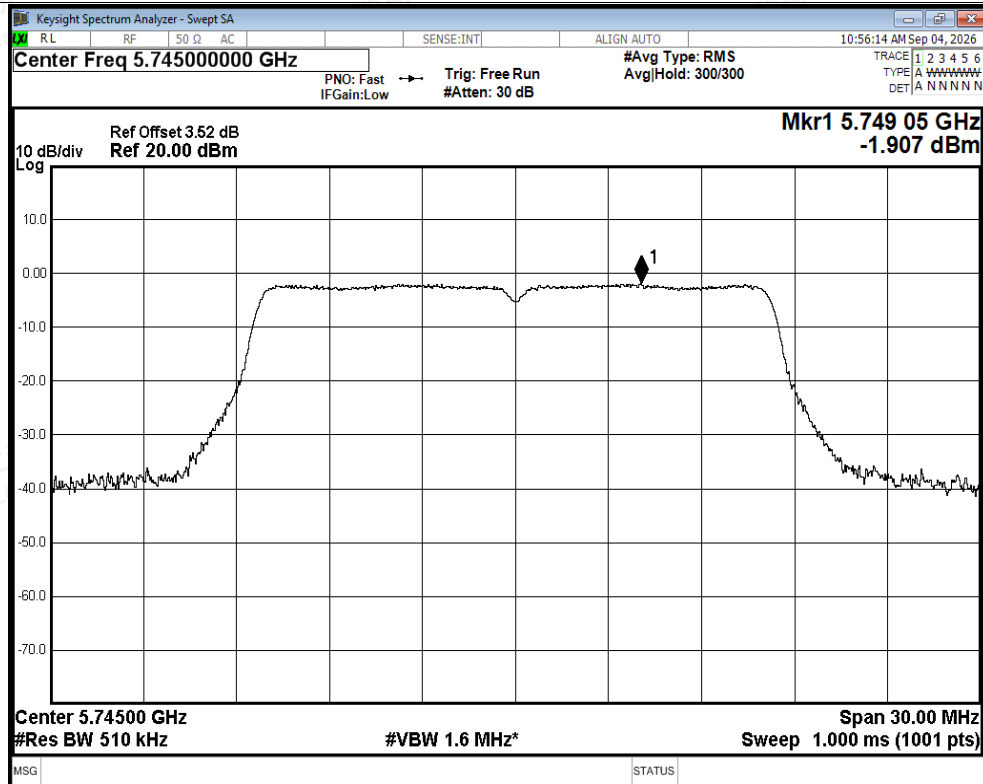


PSD NVNT a 5745MHz Ant2

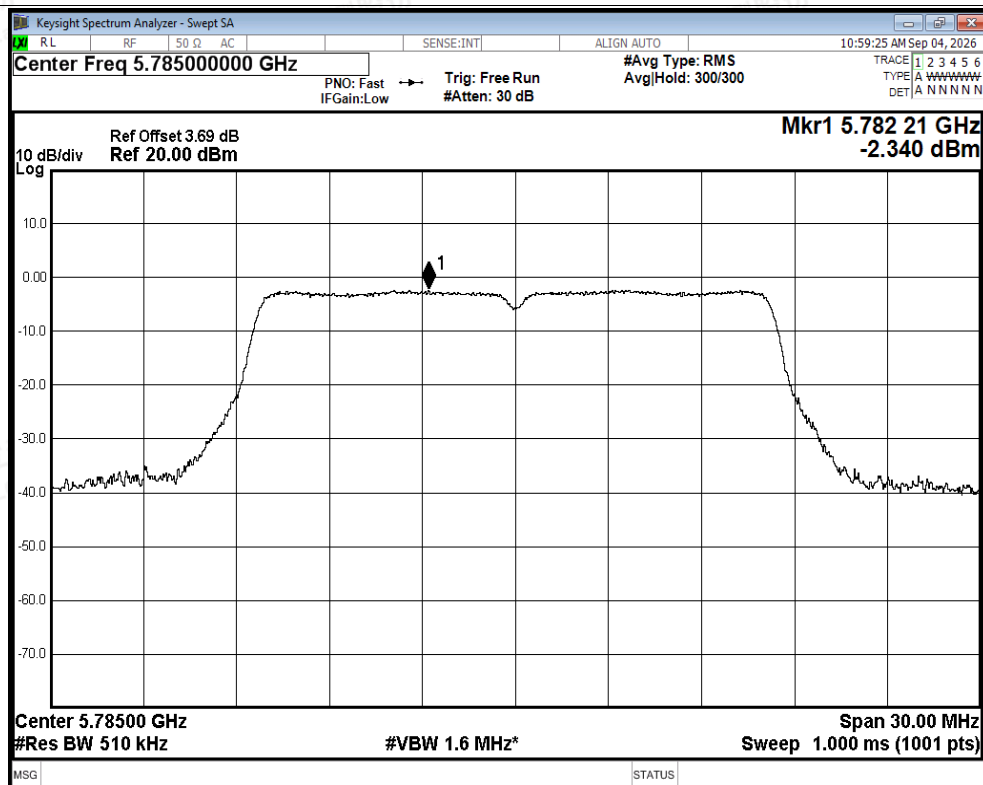


PSD NVNT a 5785MHz Ant2

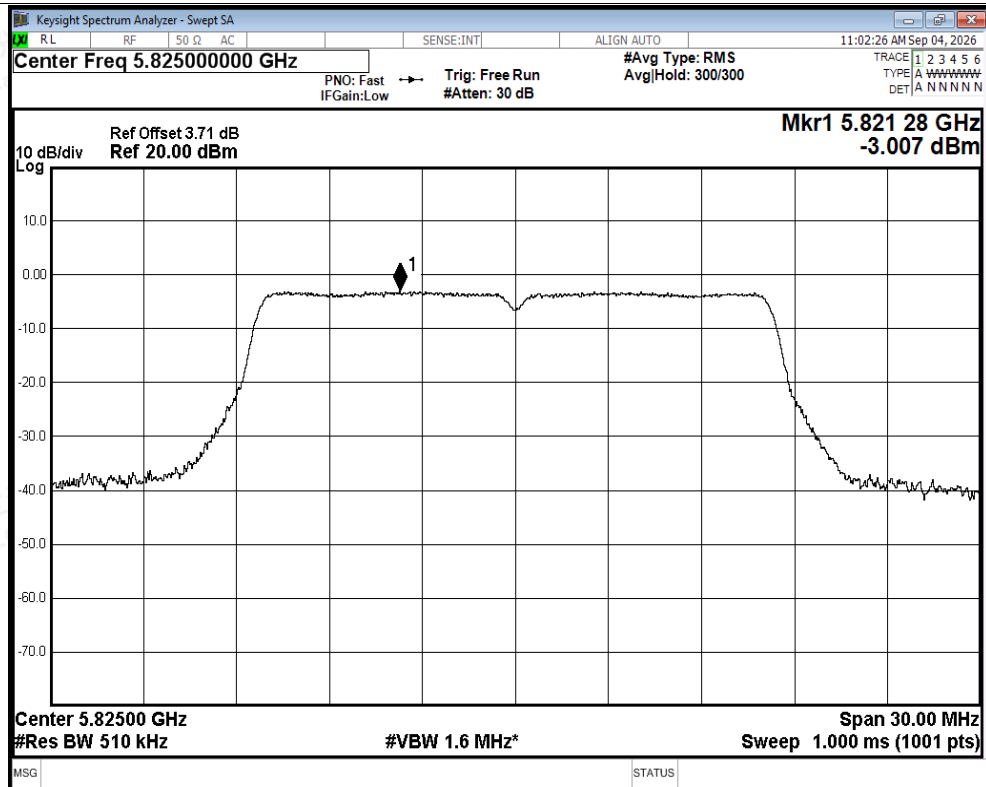


PSD NVNT a 5825MHz Ant2

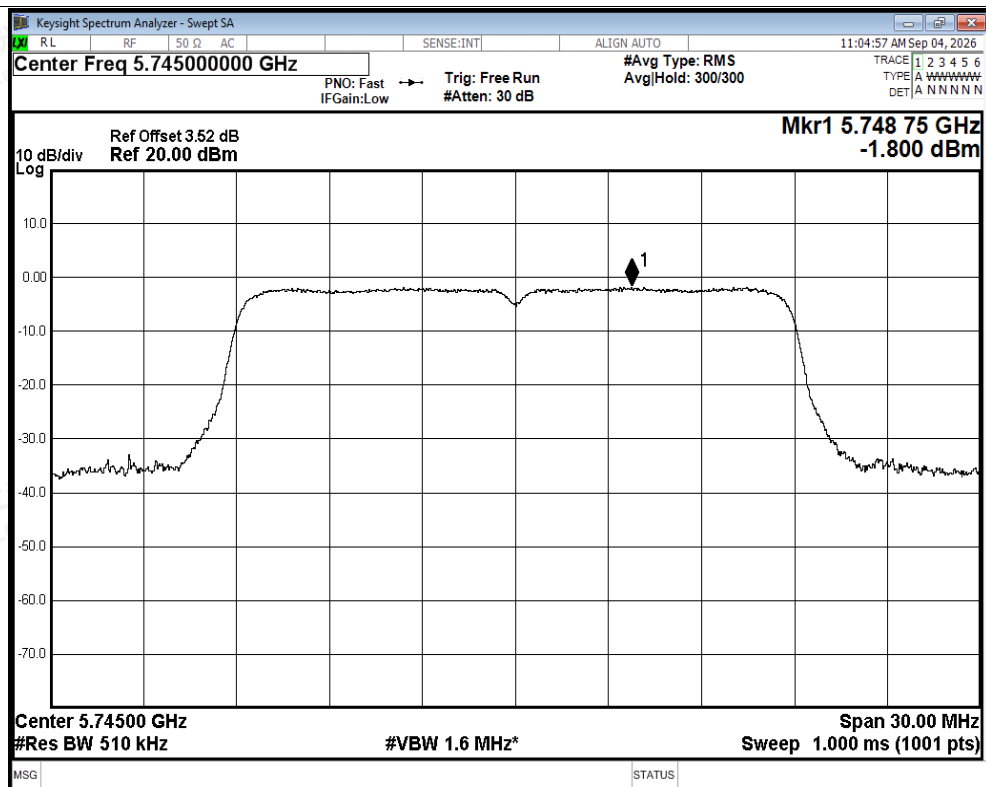


PSD NVNT n20 5745MHz Ant2

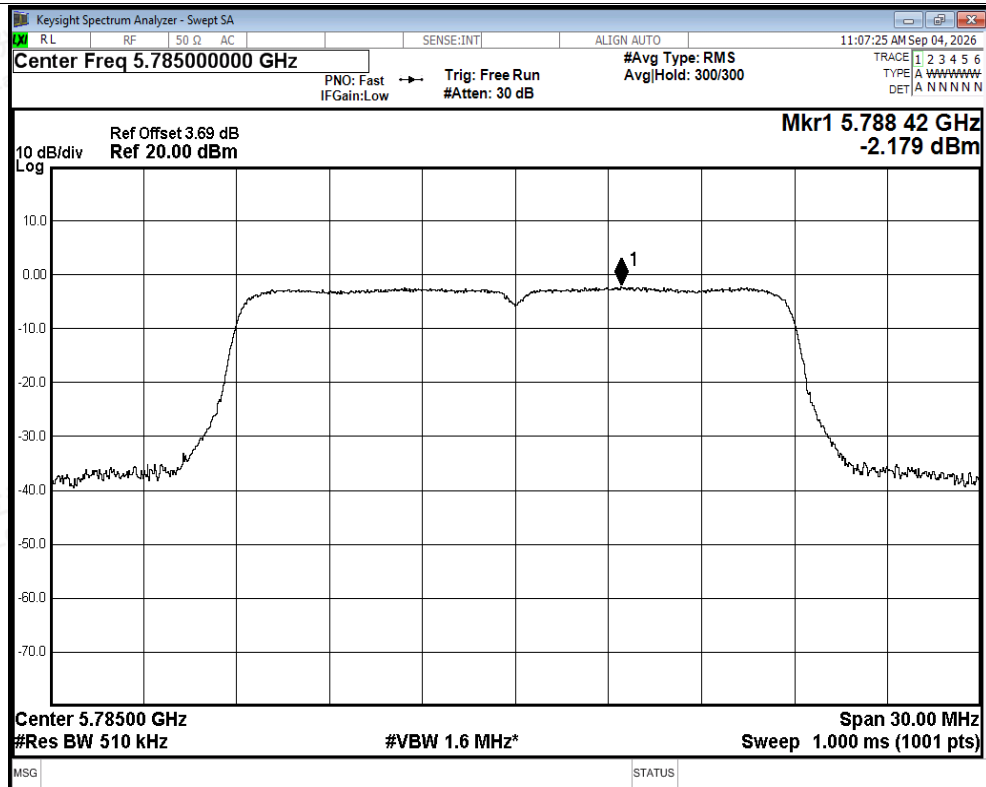


PSD NVNT n20 5785MHz Ant2

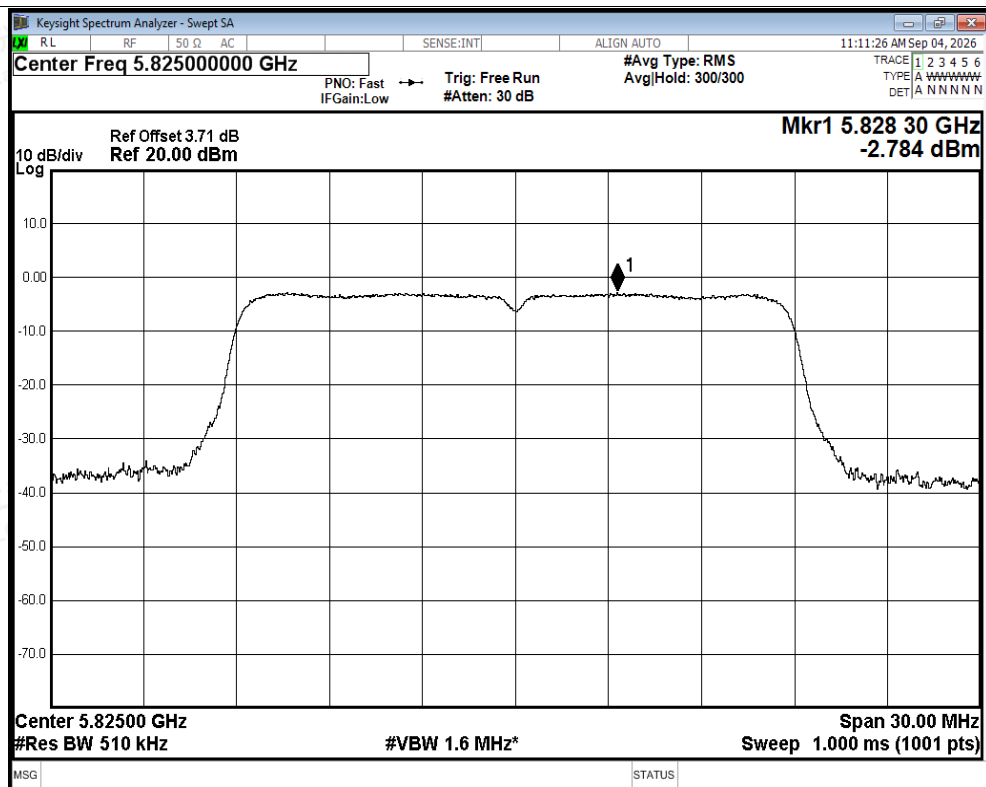


PSD NVNT n20 5825MHz Ant2

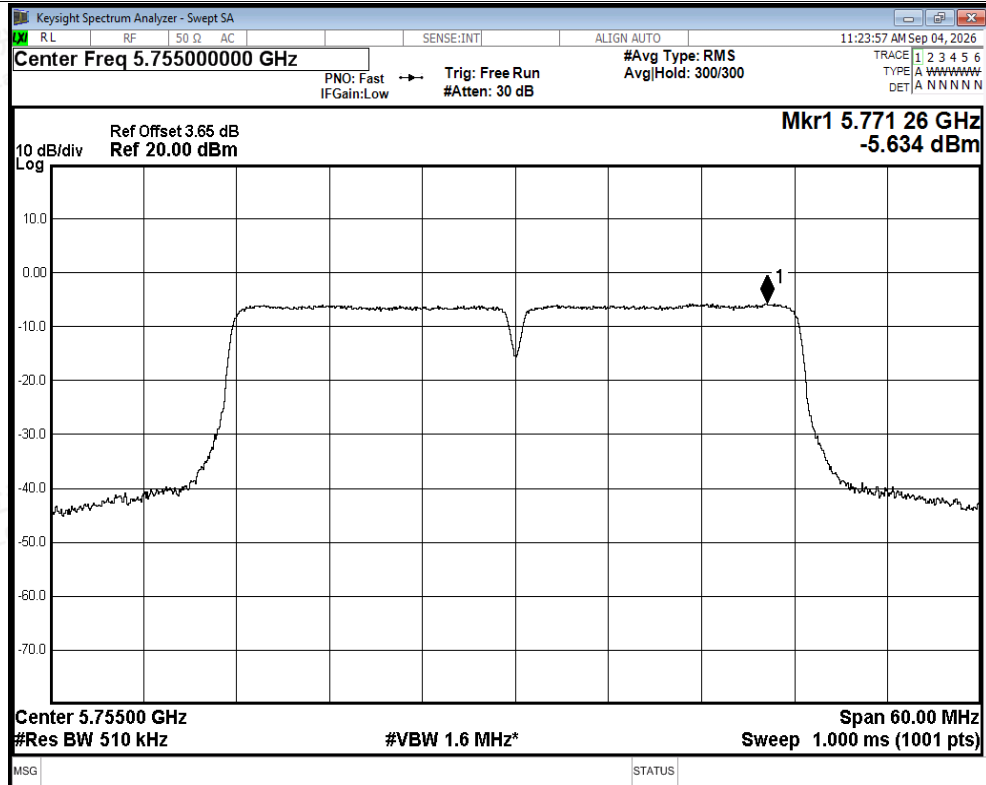


PSD NVNT n40 5755MHz Ant2

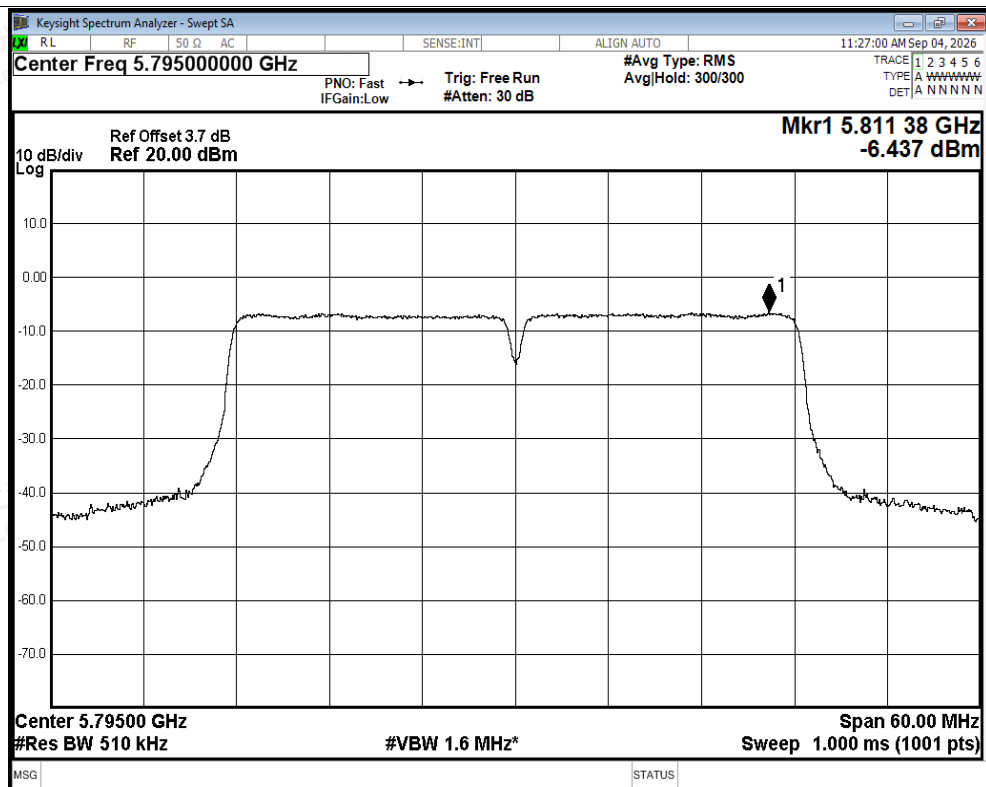


PSD NVNT n40 5795MHz Ant2

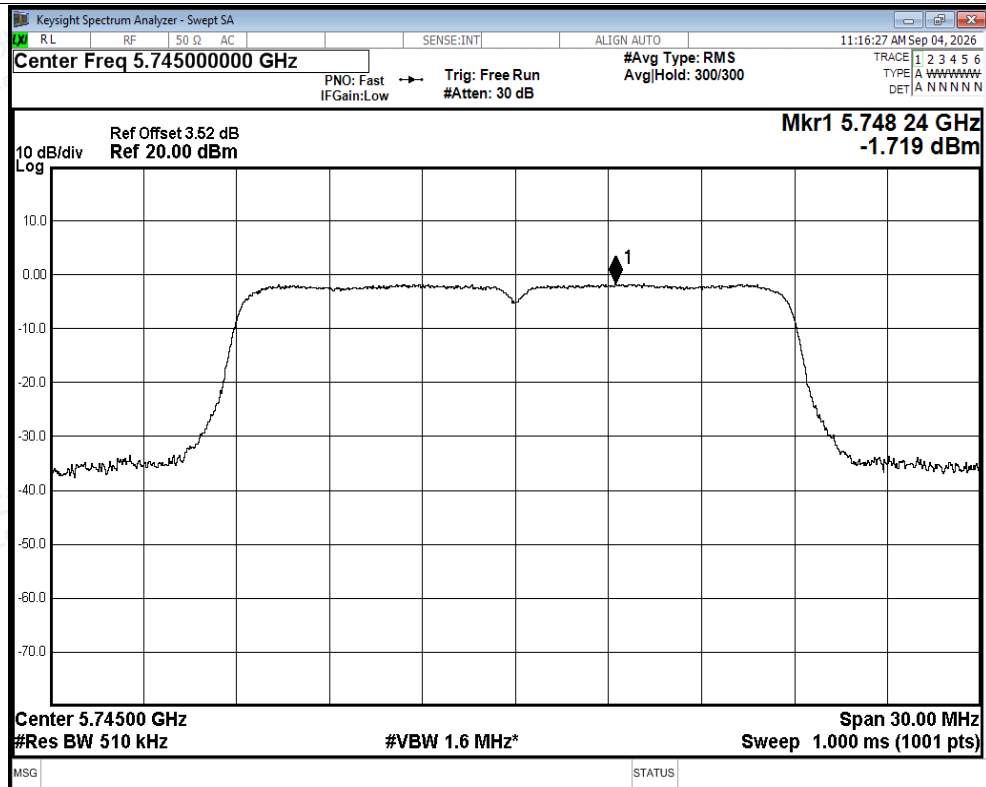


PSD NVNT ac20 5745MHz Ant2

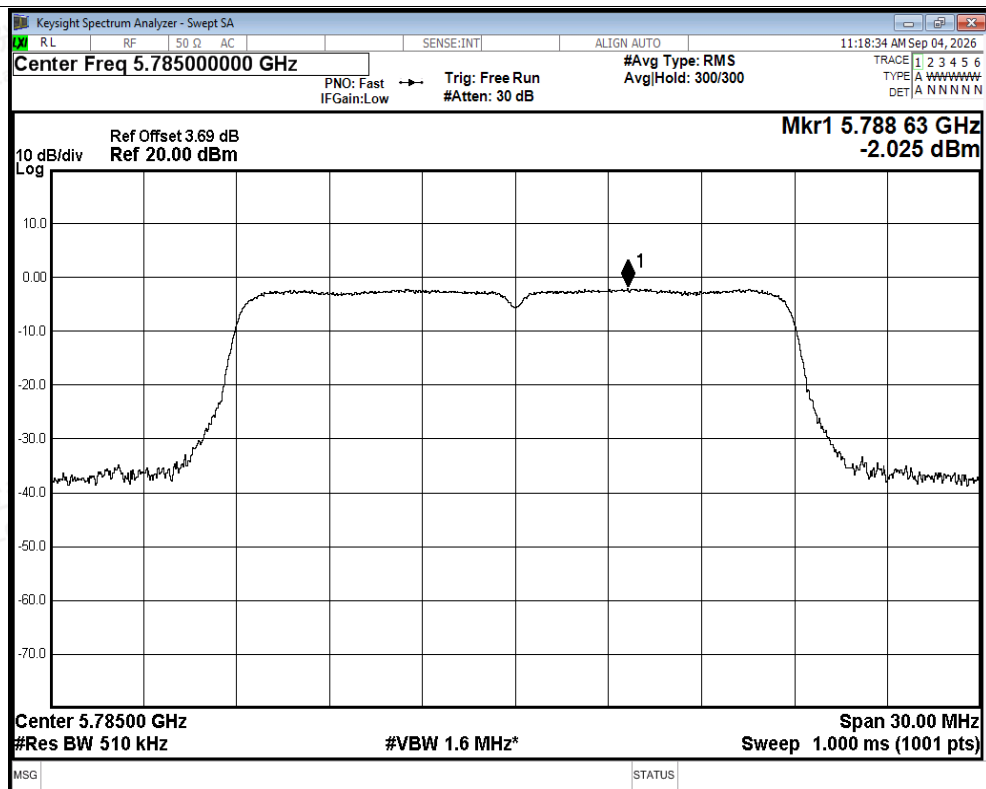


PSD NVNT ac20 5785MHz Ant2

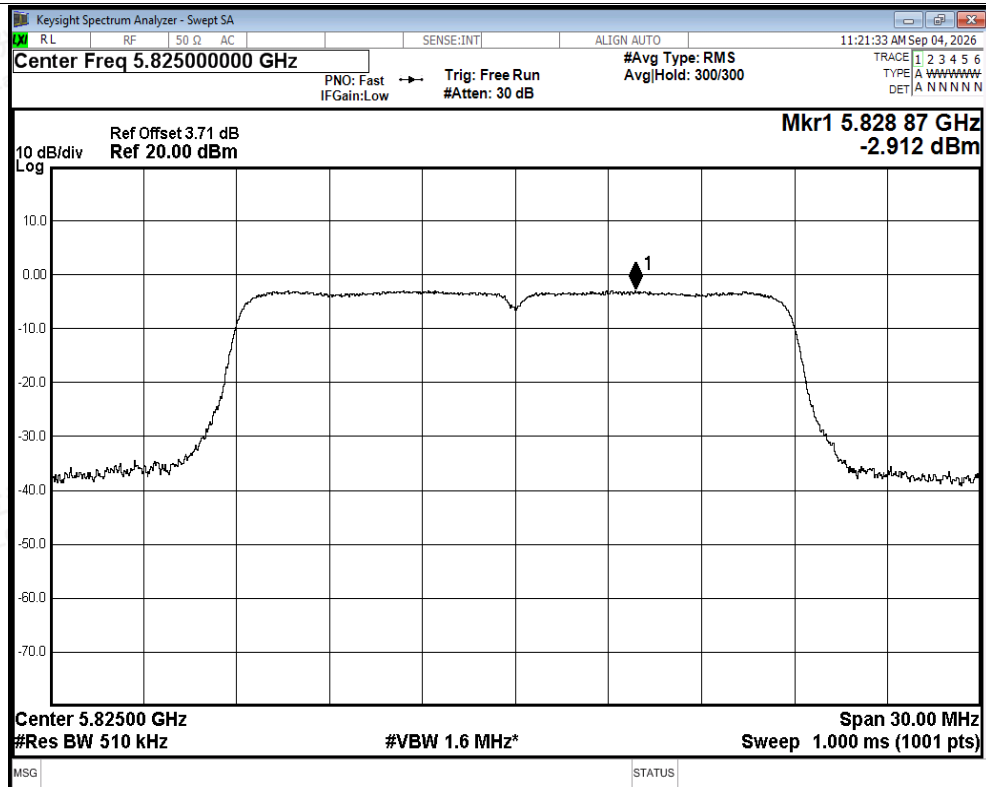


PSD NVNT ac20 5825MHz Ant2

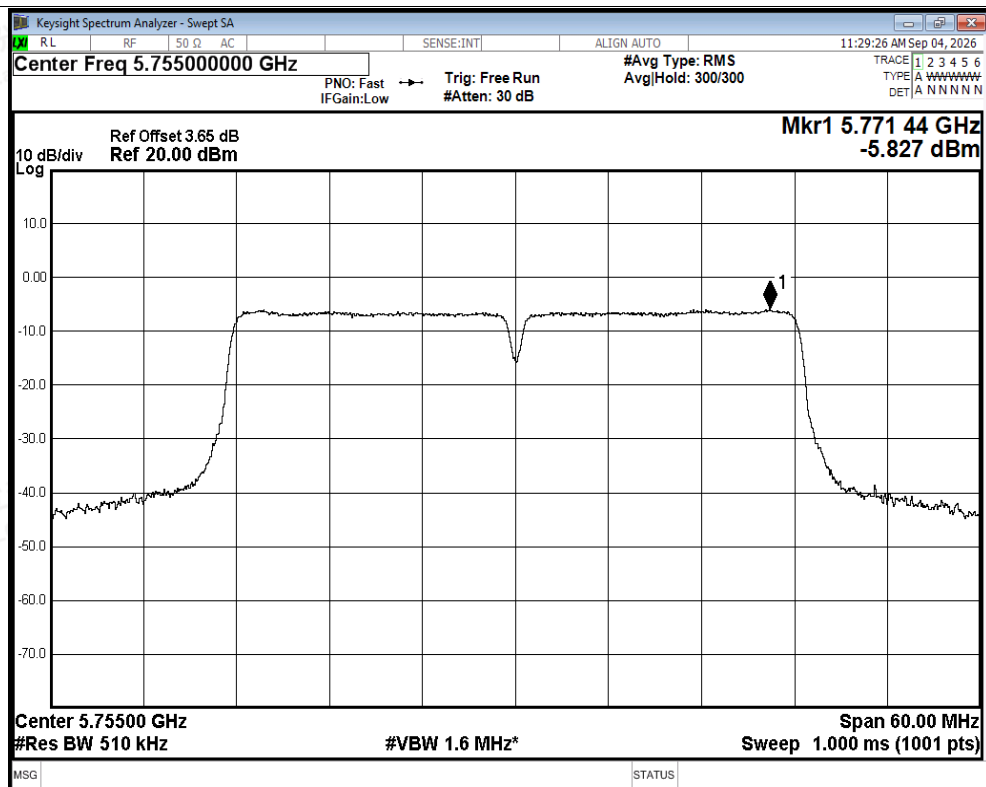

PSD NVNT ac40 5755MHz Ant2

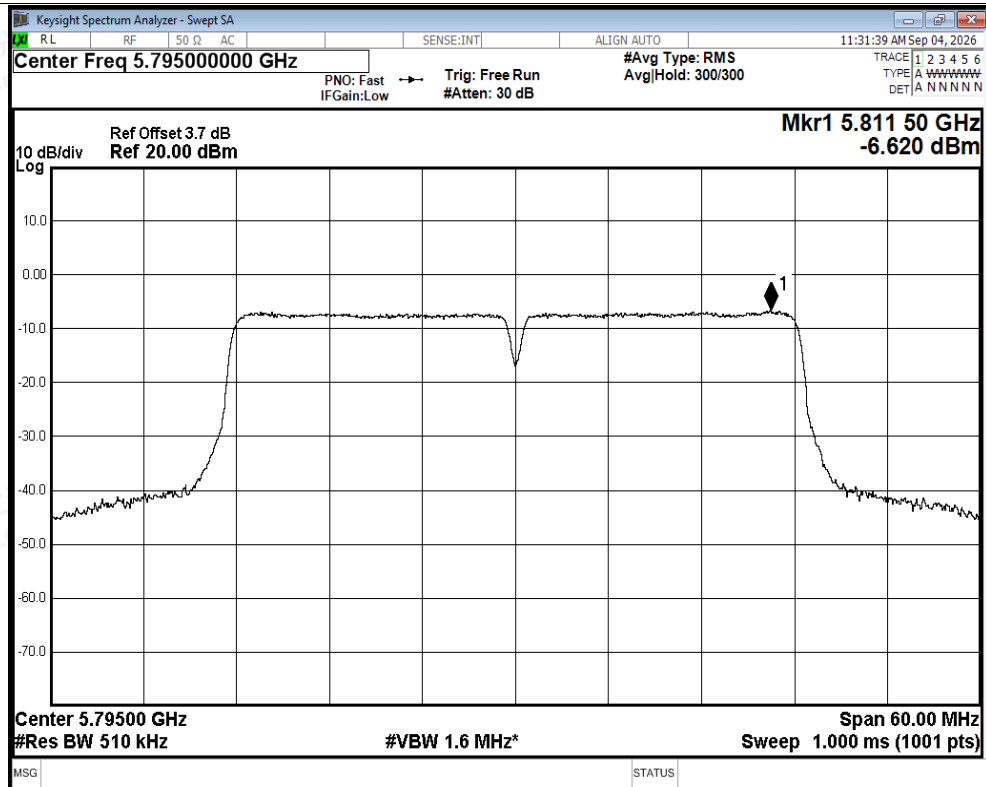

PSD NVNT ac40 5795MHz Ant2

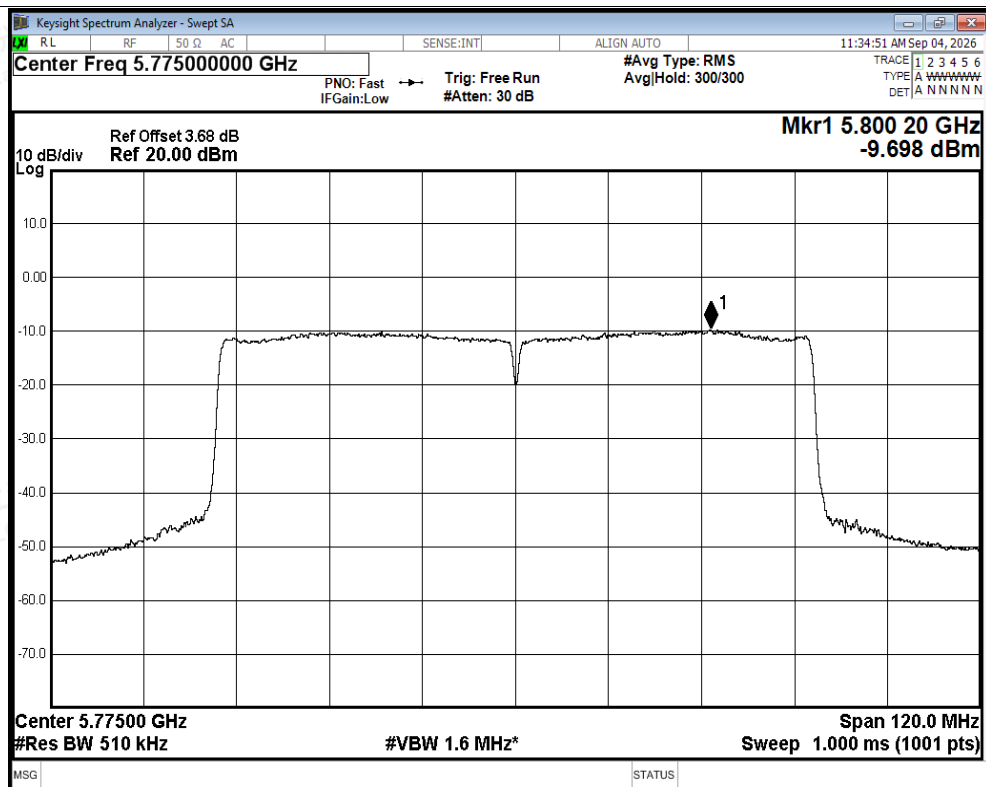

PSD NVNT ac80 5775MHz Ant2



C.4 Restrict Band


Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	EIRP (dBm)	Detector	Limit (dB/m)	Verdict
NVNT	a	5745	Ant1	5650	-50.97	3.94	-47.03	Peak	-29.98	Pass
NVNT	a	5745	Ant1	5650	-57.34	3.94	-53.40	Average	-29.98	Pass
NVNT	a	5745	Ant1	5700	-48.25	3.94	-44.31	Peak	7.02	Pass
NVNT	a	5745	Ant1	5700	-55.15	3.94	-51.21	Average	7.02	Pass
NVNT	a	5745	Ant1	5720	-34.33	3.94	-30.39	Peak	12.62	Pass
NVNT	a	5745	Ant1	5720	-46.11	3.94	-42.17	Average	12.62	Pass
NVNT	a	5745	Ant1	5725	-24.71	3.94	-20.77	Peak	24.02	Pass
NVNT	a	5745	Ant1	5725	-41.38	3.94	-37.44	Average	24.02	Pass
NVNT	a	5825	Ant1	5850	-36.69	3.94	-32.75	Peak	24.02	Pass
NVNT	a	5825	Ant1	5850	-49.39	3.94	-45.45	Average	24.02	Pass
NVNT	a	5825	Ant1	5855	-44.21	3.94	-40.27	Peak	12.62	Pass
NVNT	a	5825	Ant1	5855	-52.78	3.94	-48.84	Average	12.62	Pass
NVNT	a	5825	Ant1	5875	-46.46	3.94	-42.52	Peak	7.02	Pass
NVNT	a	5825	Ant1	5875	-54.9	3.94	-50.96	Average	7.02	Pass
NVNT	a	5825	Ant1	5925	-48.35	3.94	-44.41	Peak	-29.98	Pass
NVNT	a	5825	Ant1	5925	-55.79	3.94	-51.85	Average	-29.98	Pass
NVNT	n20	5745	Ant1	5650	-50.71	3.94	-46.77	Peak	-29.98	Pass
NVNT	n20	5745	Ant1	5650	-57.24	3.94	-53.30	Average	-29.98	Pass
NVNT	n20	5745	Ant1	5700	-48.62	3.94	-44.68	Peak	7.02	Pass
NVNT	n20	5745	Ant1	5700	-55.67	3.94	-51.73	Average	7.02	Pass
NVNT	n20	5745	Ant1	5720	-34.21	3.94	-30.27	Peak	12.62	Pass
NVNT	n20	5745	Ant1	5720	-47.23	3.94	-43.29	Average	12.62	Pass
NVNT	n20	5745	Ant1	5725	-24.13	3.94	-20.19	Peak	24.02	Pass
NVNT	n20	5745	Ant1	5725	-41.96	3.94	-38.02	Average	24.02	Pass
NVNT	n20	5825	Ant1	5850	-35.02	3.94	-31.08	Peak	24.02	Pass
NVNT	n20	5825	Ant1	5850	-46.08	3.94	-42.14	Average	24.02	Pass
NVNT	n20	5825	Ant1	5855	-39.98	3.94	-36.04	Peak	12.62	Pass
NVNT	n20	5825	Ant1	5855	-50.48	3.94	-46.54	Average	12.62	Pass
NVNT	n20	5825	Ant1	5875	-46.9	3.94	-42.96	Peak	7.02	Pass
NVNT	n20	5825	Ant1	5875	-55.13	3.94	-51.19	Average	7.02	Pass
NVNT	n20	5825	Ant1	5925	-48.59	3.94	-44.65	Peak	-29.98	Pass
NVNT	n20	5825	Ant1	5925	-55.86	3.94	-51.92	Average	-29.98	Pass
NVNT	n40	5755	Ant1	5650	-50.75	3.94	-46.81	Peak	-29.98	Pass
NVNT	n40	5755	Ant1	5650	-56.99	3.94	-53.05	Average	-29.98	Pass
NVNT	n40	5755	Ant1	5700	-48.63	3.94	-44.69	Peak	7.02	Pass
NVNT	n40	5755	Ant1	5700	-55.79	3.94	-51.85	Average	7.02	Pass
NVNT	n40	5755	Ant1	5720	-33.22	3.94	-29.28	Peak	12.62	Pass
NVNT	n40	5755	Ant1	5720	-46.6	3.94	-42.66	Average	12.62	Pass
NVNT	n40	5755	Ant1	5725	-32.5	3.94	-28.56	Peak	24.02	Pass
NVNT	n40	5755	Ant1	5725	-43.23	3.94	-39.29	Average	24.02	Pass




NVNT	n40	5795	Ant1	5850	-48.74	3.94	-44.80	Peak	24.02	Pass
NVNT	n40	5795	Ant1	5850	-55.27	3.94	-51.33	Average	24.02	Pass
NVNT	n40	5795	Ant1	5855	-49.09	3.94	-45.15	Peak	12.62	Pass
NVNT	n40	5795	Ant1	5855	-55.39	3.94	-51.45	Average	12.62	Pass
NVNT	n40	5795	Ant1	5875	-49.75	3.94	-45.81	Peak	7.02	Pass
NVNT	n40	5795	Ant1	5875	-55.68	3.94	-51.74	Average	7.02	Pass
NVNT	n40	5795	Ant1	5925	-50.49	3.94	-46.55	Peak	-29.98	Pass
NVNT	n40	5795	Ant1	5925	-56.15	3.94	-52.21	Average	-29.98	Pass
NVNT	ac20	5745	Ant1	5650	-49.37	3.94	-45.43	Peak	-29.98	Pass
NVNT	ac20	5745	Ant1	5650	-57.32	3.94	-53.38	Average	-29.98	Pass
NVNT	ac20	5745	Ant1	5700	-48.03	3.94	-44.09	Peak	7.02	Pass
NVNT	ac20	5745	Ant1	5700	-55.8	3.94	-51.86	Average	7.02	Pass
NVNT	ac20	5745	Ant1	5720	-33.36	3.94	-29.42	Peak	12.62	Pass
NVNT	ac20	5745	Ant1	5720	-47.03	3.94	-43.09	Average	12.62	Pass
NVNT	ac20	5745	Ant1	5725	-27.68	3.94	-23.74	Peak	24.02	Pass
NVNT	ac20	5745	Ant1	5725	-42.08	3.94	-38.14	Average	24.02	Pass
NVNT	ac20	5825	Ant1	5850	-35.99	3.94	-32.05	Peak	24.02	Pass
NVNT	ac20	5825	Ant1	5850	-46.62	3.94	-42.68	Average	24.02	Pass
NVNT	ac20	5825	Ant1	5855	-34.29	3.94	-30.35	Peak	12.62	Pass
NVNT	ac20	5825	Ant1	5855	-50.95	3.94	-47.01	Average	12.62	Pass
NVNT	ac20	5825	Ant1	5875	-47.49	3.94	-43.55	Peak	7.02	Pass
NVNT	ac20	5825	Ant1	5875	-55.19	3.94	-51.25	Average	7.02	Pass
NVNT	ac20	5825	Ant1	5925	-48.74	3.94	-44.8	Peak	-29.98	Pass
NVNT	ac20	5825	Ant1	5925	-55.87	3.94	-51.93	Average	-29.98	Pass
NVNT	ac40	5755	Ant1	5650	-49.19	3.94	-45.25	Peak	-29.98	Pass
NVNT	ac40	5755	Ant1	5650	-57.15	3.94	-53.21	Average	-29.98	Pass
NVNT	ac40	5755	Ant1	5700	-48.76	3.94	-44.82	Peak	7.02	Pass
NVNT	ac40	5755	Ant1	5700	-55.57	3.94	-51.63	Average	7.02	Pass
NVNT	ac40	5755	Ant1	5720	-30.4	3.94	-26.46	Peak	12.62	Pass
NVNT	ac40	5755	Ant1	5720	-46.19	3.94	-42.25	Average	12.62	Pass
NVNT	ac40	5755	Ant1	5725	-28.75	3.94	-24.81	Peak	24.02	Pass
NVNT	ac40	5755	Ant1	5725	-43.29	3.94	-39.35	Average	24.02	Pass
NVNT	ac40	5795	Ant1	5850	-47.4	3.94	-43.46	Peak	24.02	Pass
NVNT	ac40	5795	Ant1	5850	-55.27	3.94	-51.33	Average	24.02	Pass
NVNT	ac40	5795	Ant1	5855	-48.33	3.94	-44.39	Peak	12.62	Pass
NVNT	ac40	5795	Ant1	5855	-55.48	3.94	-51.54	Average	12.62	Pass
NVNT	ac40	5795	Ant1	5875	-49.25	3.94	-45.31	Peak	7.02	Pass
NVNT	ac40	5795	Ant1	5875	-55.93	3.94	-51.99	Average	7.02	Pass
NVNT	ac40	5795	Ant1	5925	-48.79	3.94	-44.85	Peak	-29.98	Pass
NVNT	ac40	5795	Ant1	5925	-56.06	3.94	-52.12	Average	-29.98	Pass
NVNT	ac80	5775	Ant1	5850	-48.89	3.94	-44.95	Peak	-29.98	Pass
NVNT	ac80	5775	Ant1	5850	-54.56	3.94	-50.62	Average	-29.98	Pass
NVNT	ac80	5775	Ant1	5855	-47.18	3.94	-43.24	Peak	7.02	Pass
NVNT	ac80	5775	Ant1	5855	-54.55	3.94	-50.61	Average	7.02	Pass




NVNT	ac80	5775	Ant1	5875	-48.66	3.94	-44.72	Peak	12.62	Pass
NVNT	ac80	5775	Ant1	5875	-55.43	3.94	-51.49	Average	12.62	Pass
NVNT	ac80	5775	Ant1	5925	-48.9	3.94	-44.96	Peak	24.02	Pass
NVNT	ac80	5775	Ant1	5925	-55.75	3.94	-51.81	Average	24.02	Pass
NVNT	ac80	5775	Ant1	5650	-50.15	3.94	-46.21	Peak	24.02	Pass
NVNT	ac80	5775	Ant1	5650	-56.64	3.94	-52.70	Average	24.02	Pass
NVNT	ac80	5775	Ant1	5700	-45.43	3.94	-41.49	Peak	12.62	Pass
NVNT	ac80	5775	Ant1	5700	-54.02	3.94	-50.08	Average	12.62	Pass
NVNT	ac80	5775	Ant1	5720	-40.98	3.94	-37.04	Peak	7.02	Pass
NVNT	ac80	5775	Ant1	5720	-50.32	3.94	-46.38	Average	7.02	Pass
NVNT	ac80	5775	Ant1	5725	-39.85	3.94	-35.91	Peak	-29.98	Pass
NVNT	ac80	5775	Ant1	5725	-48.57	3.94	-44.63	Average	-29.98	Pass

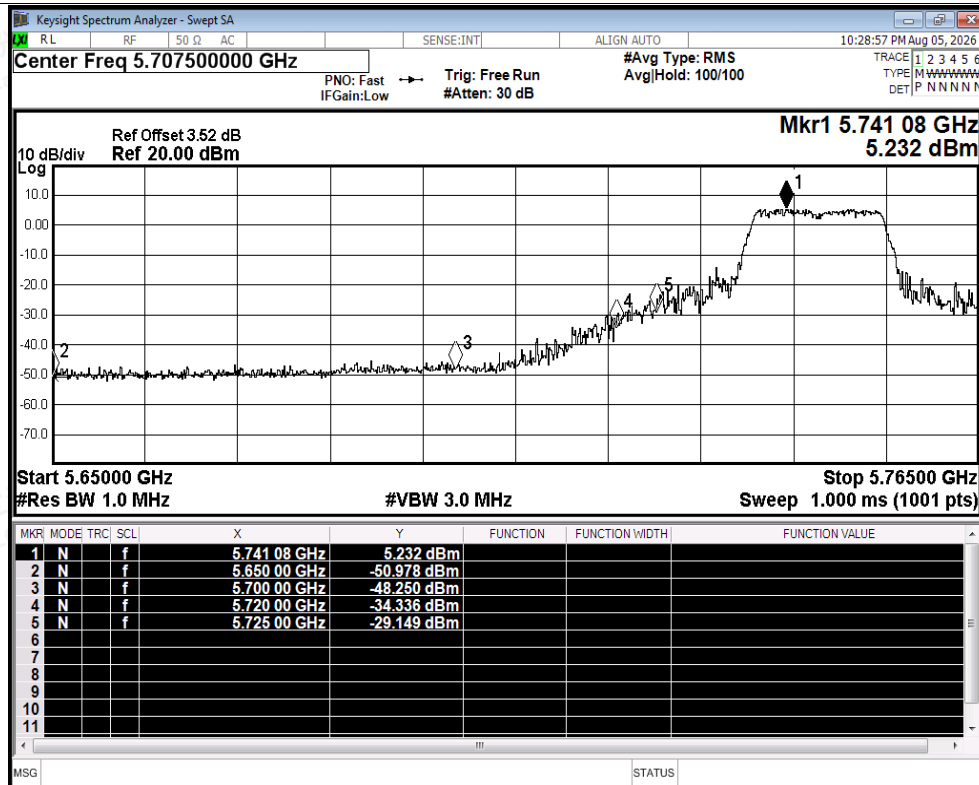


Restrict Band NVNT a 5745MHz Ant1 Peak

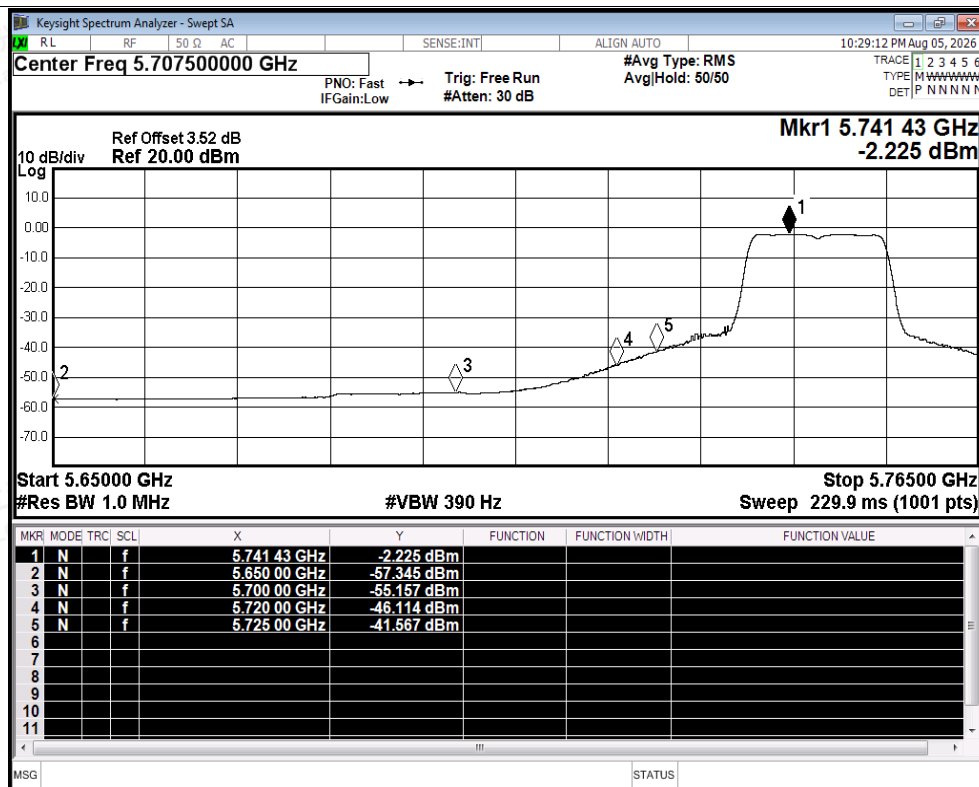


Restrict Band NVNT a 5745MHz Ant1 Average

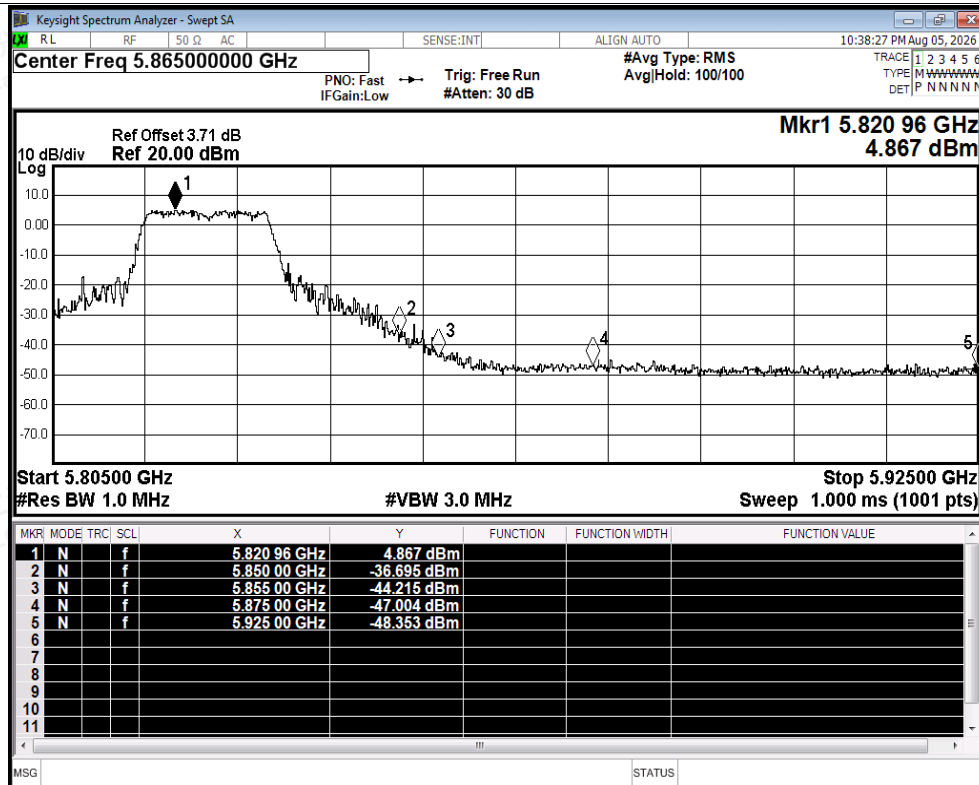


Restrict Band NVNT a 5825MHz Ant1 Peak

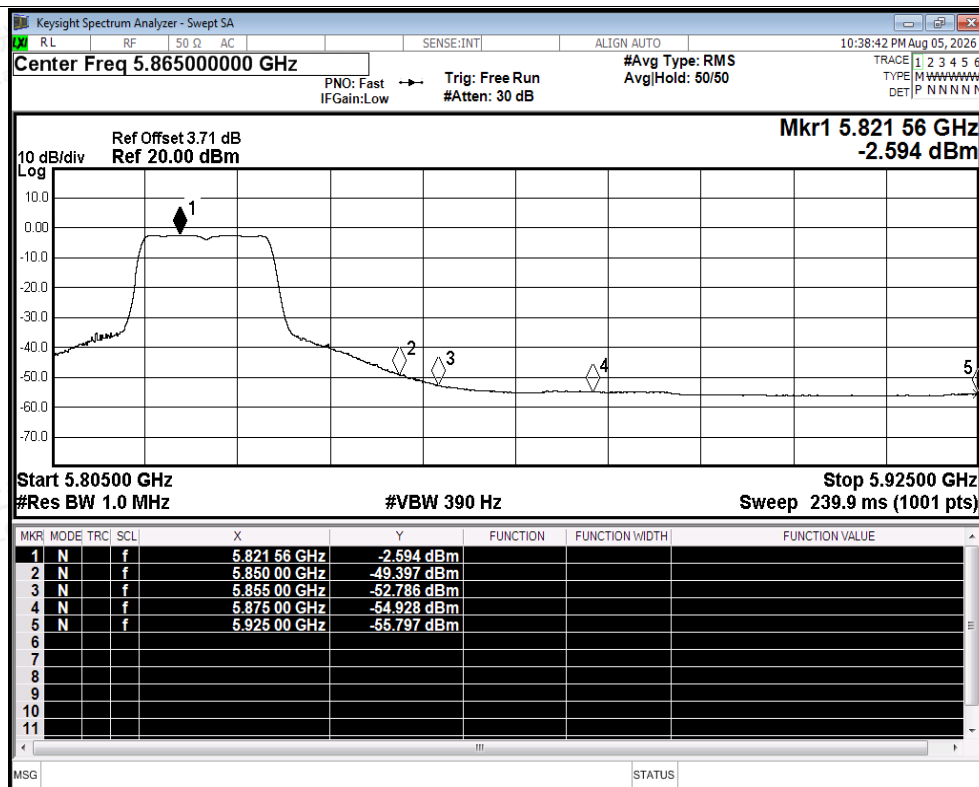


Restrict Band NVNT a 5825MHz Ant1 Average

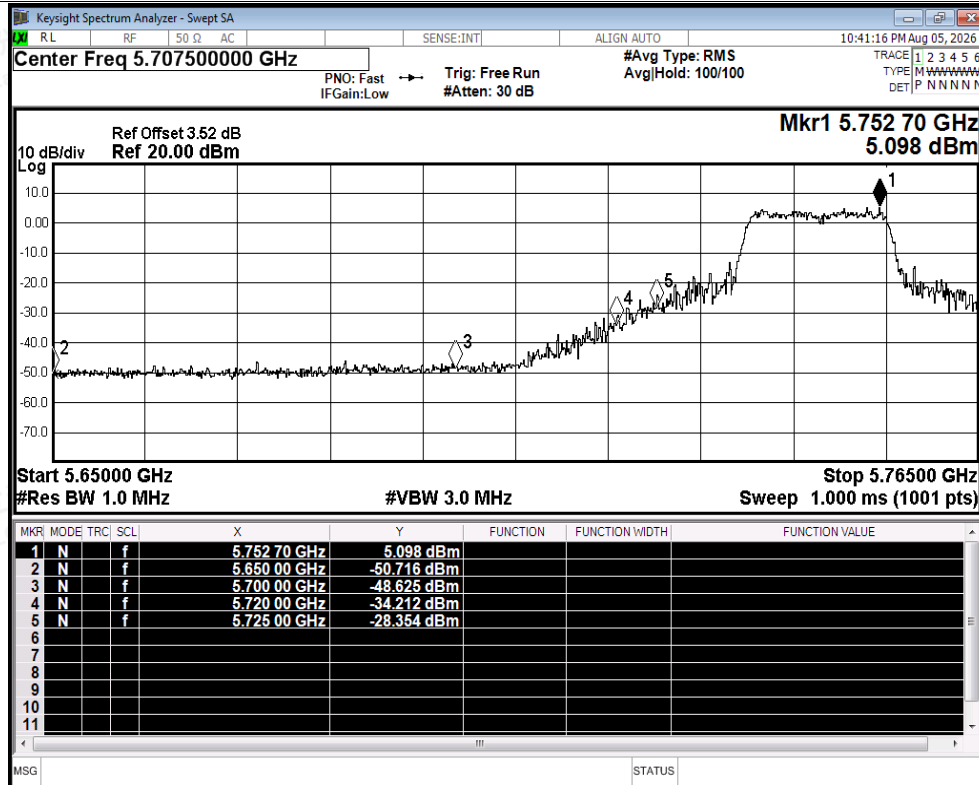


Restrict Band NVNT n20 5745MHz Ant1 Peak

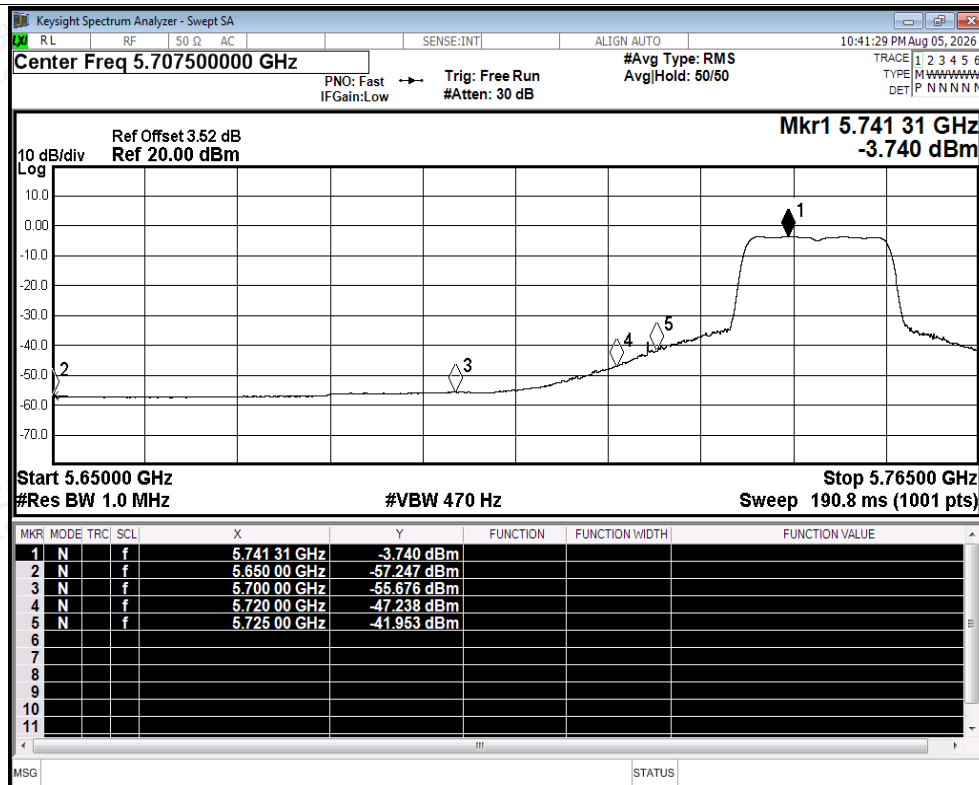


Restrict Band NVNT n20 5745MHz Ant1 Average

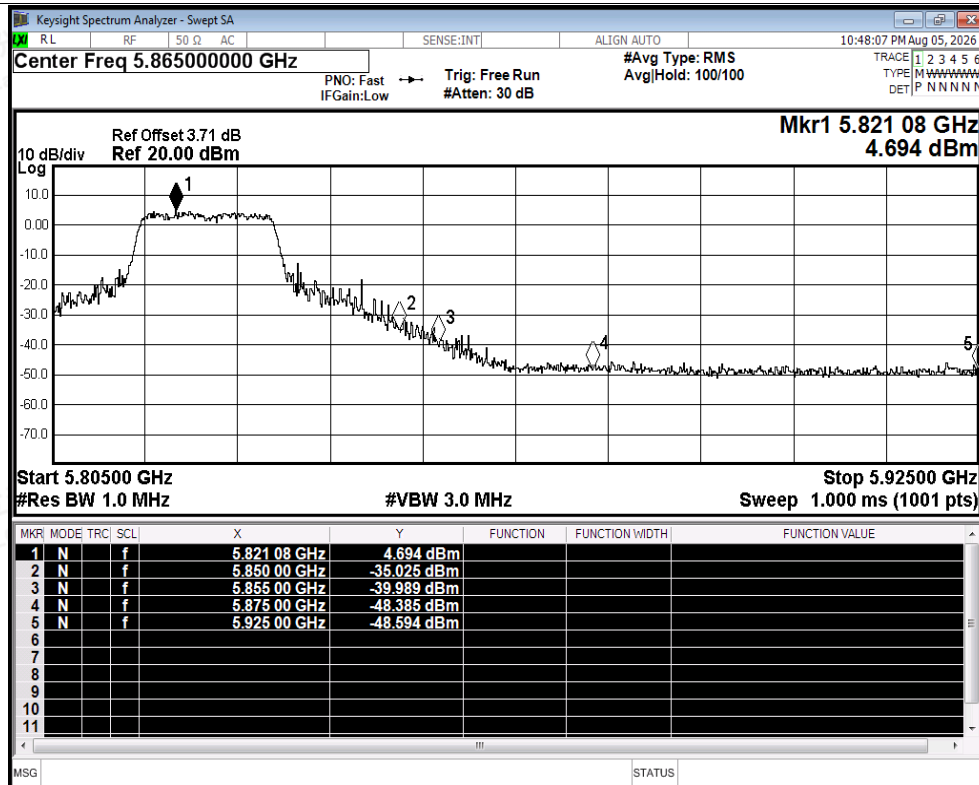


Restrict Band NVNT n20 5825MHz Ant1 Peak

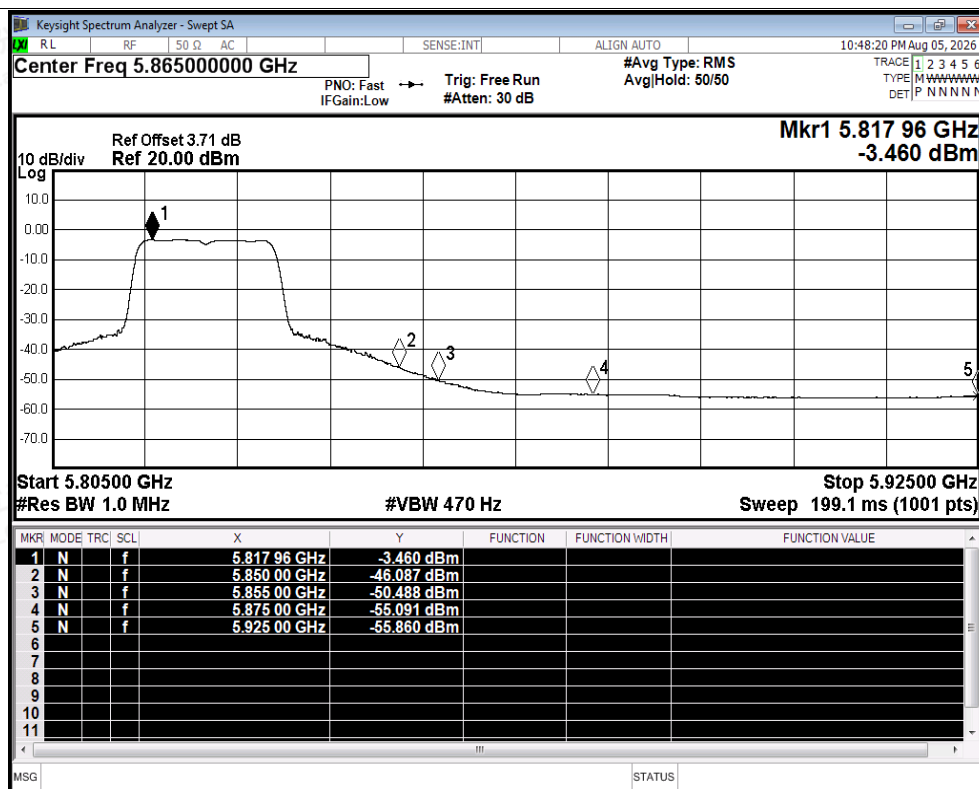


Restrict Band NVNT n20 5825MHz Ant1 Average

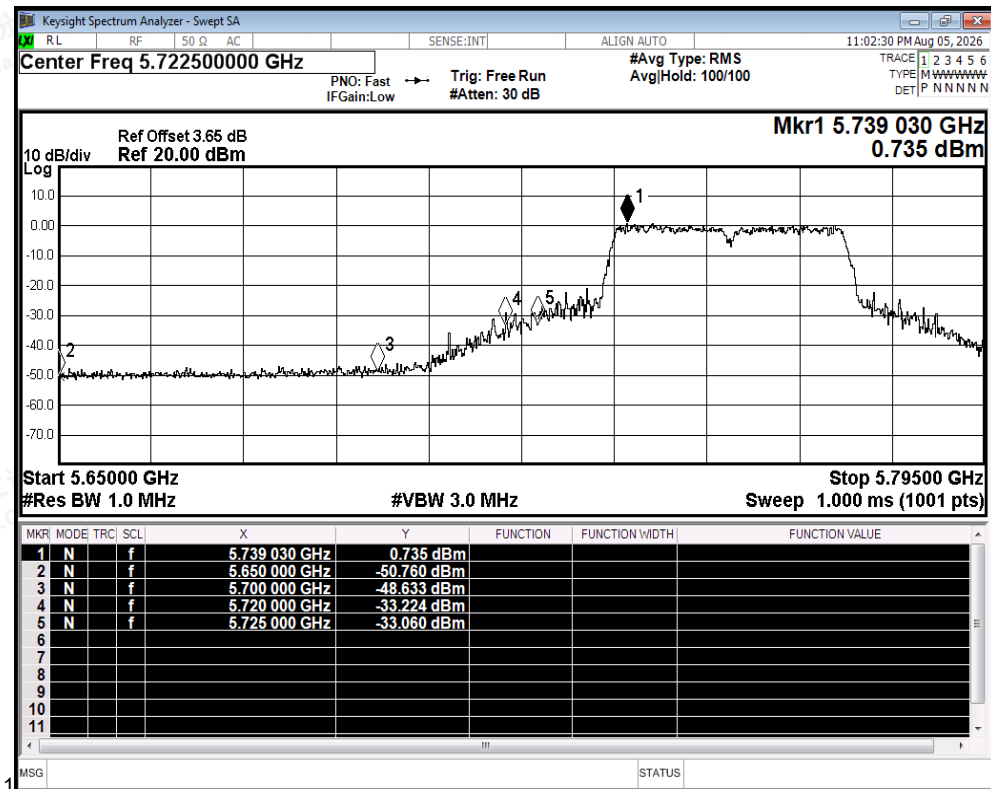


Restrict Band NVNT n40 5755MHz Ant1 Peak

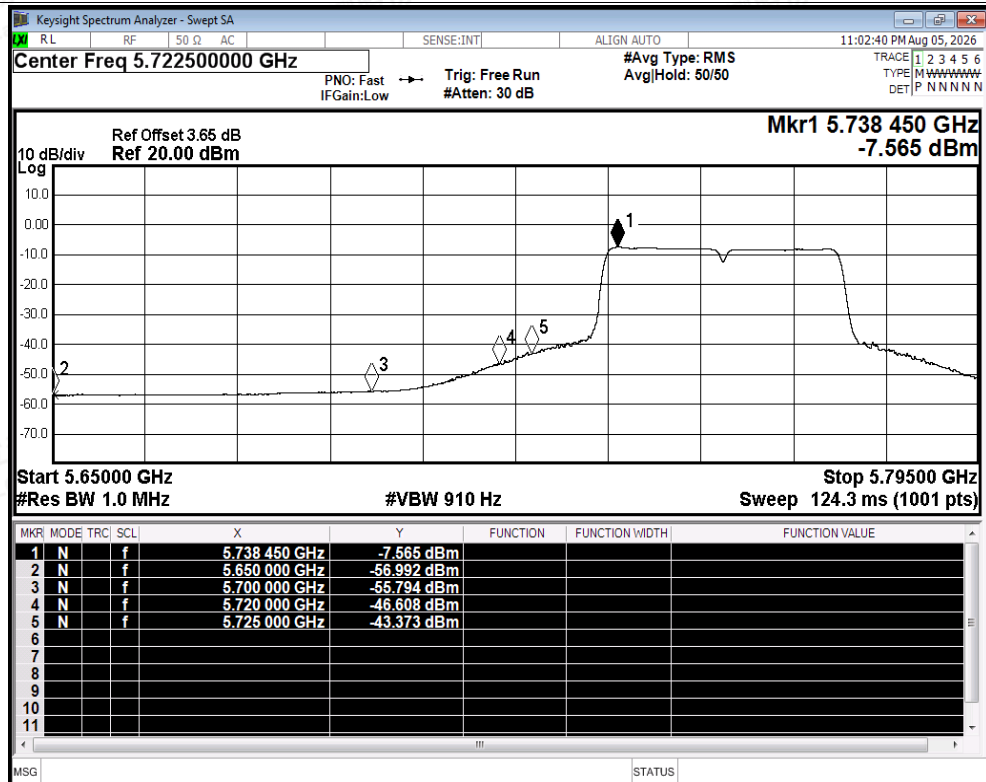


Restrict Band NVNT n40 5755MHz Ant1 Average

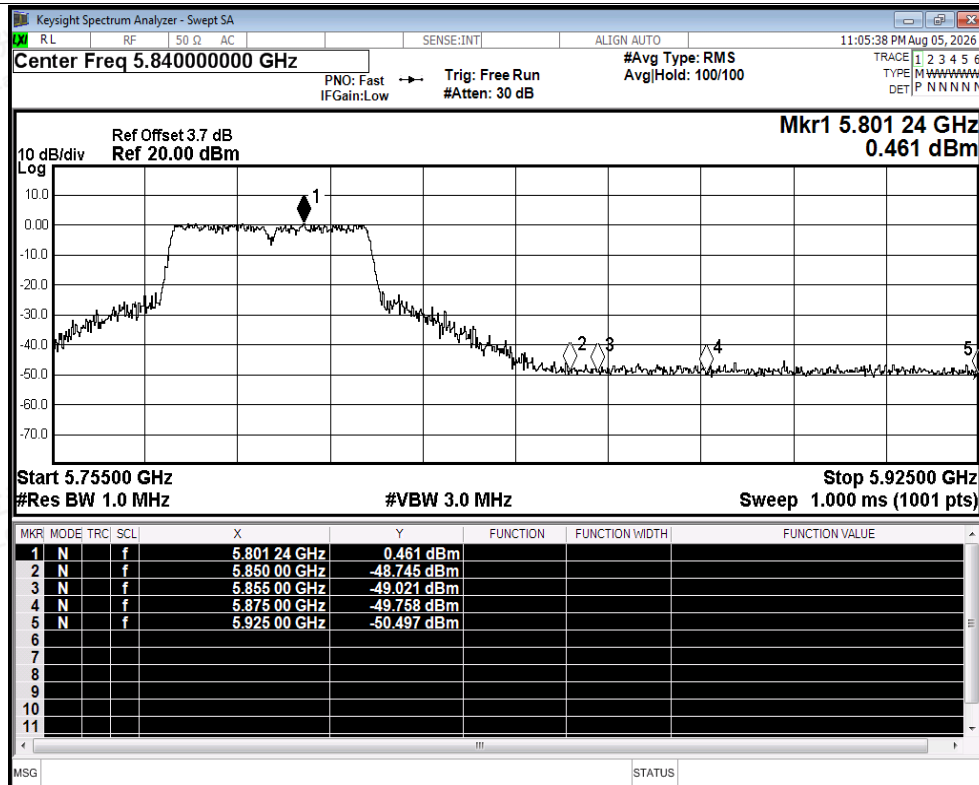


Restrict Band NVNT n40 5795MHz Ant1 Peak

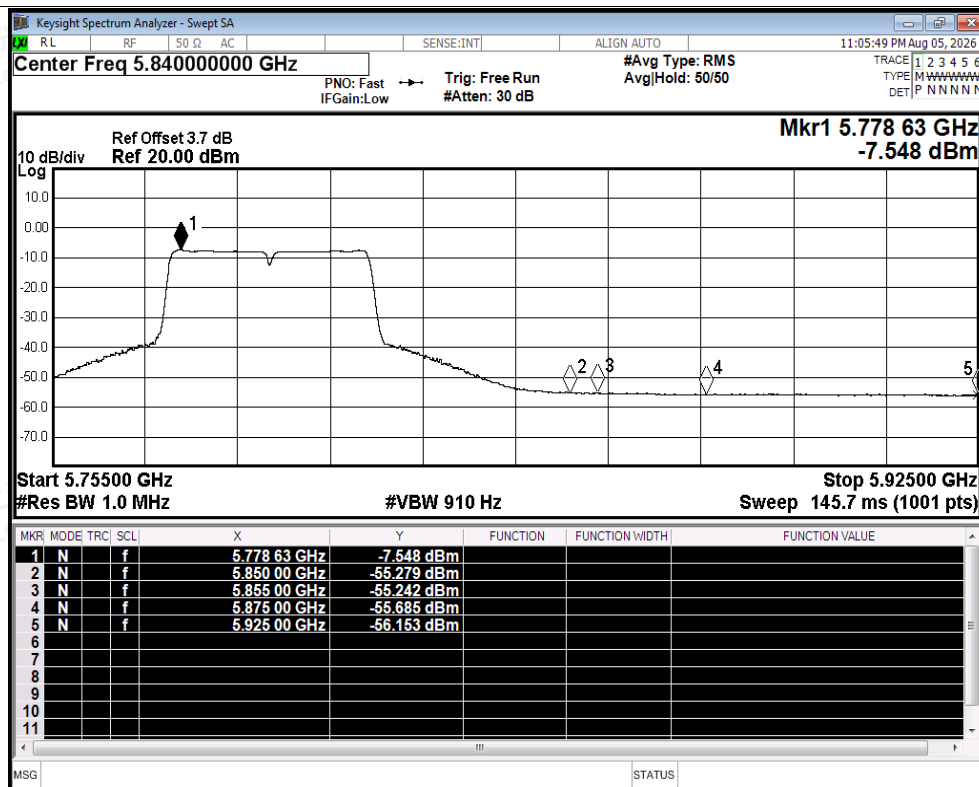


Restrict Band NVNT n40 5795MHz Ant1 Average

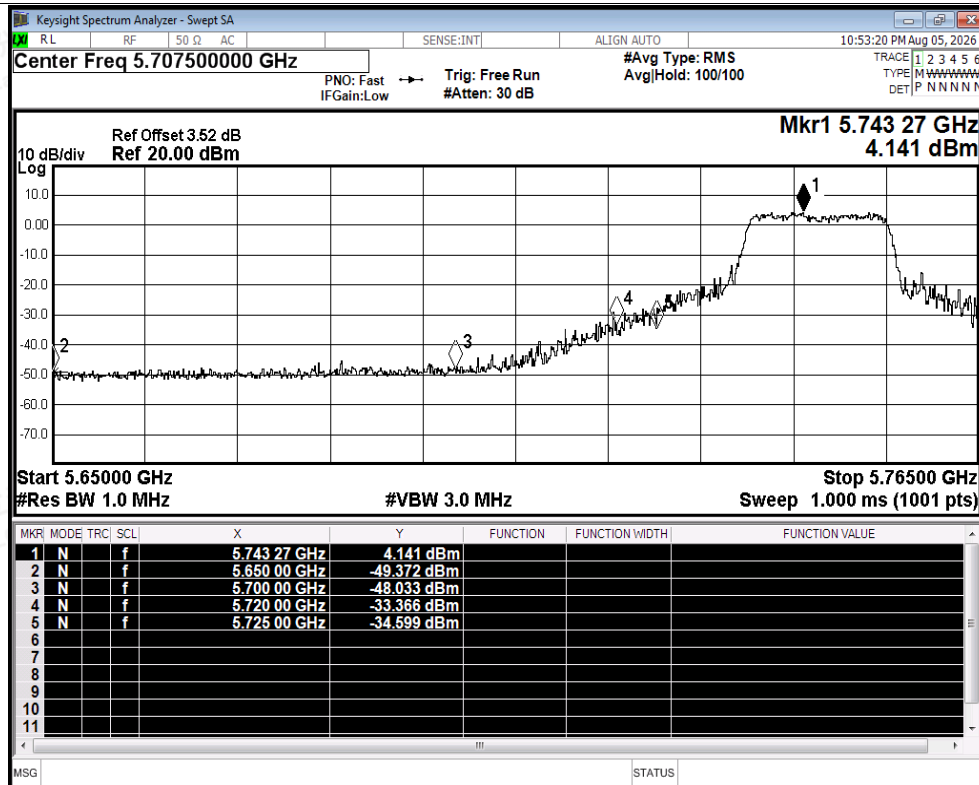


Restrict Band NVNT ac20 5745MHz Ant1 Peak

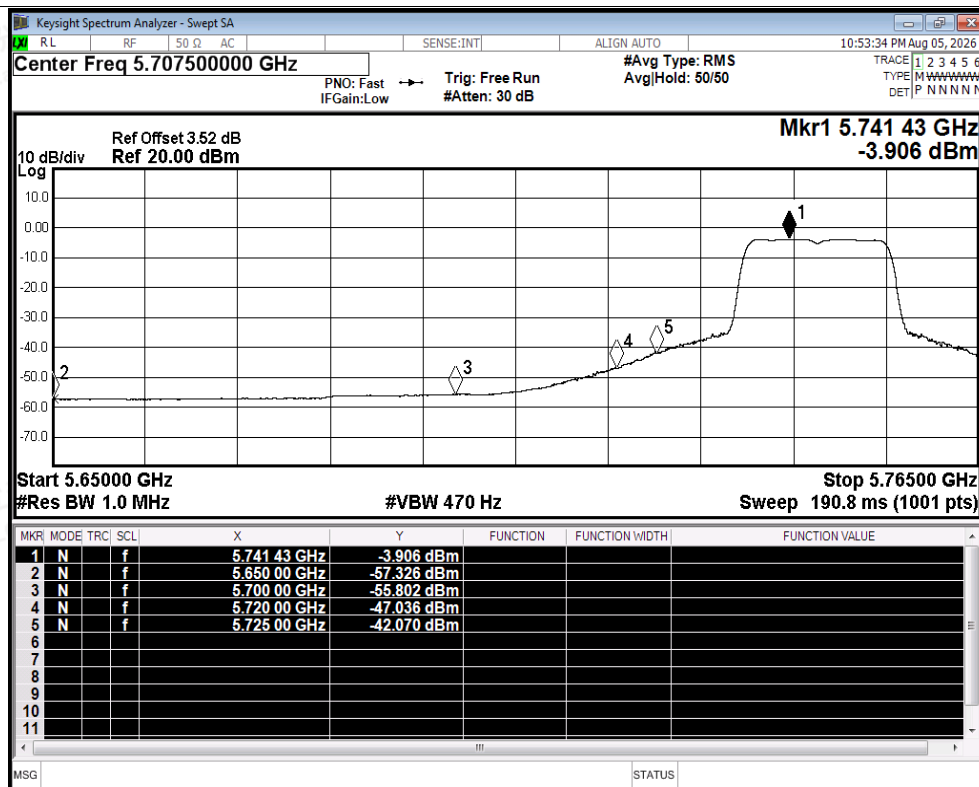


Restrict Band NVNT ac20 5745MHz Ant1 Average

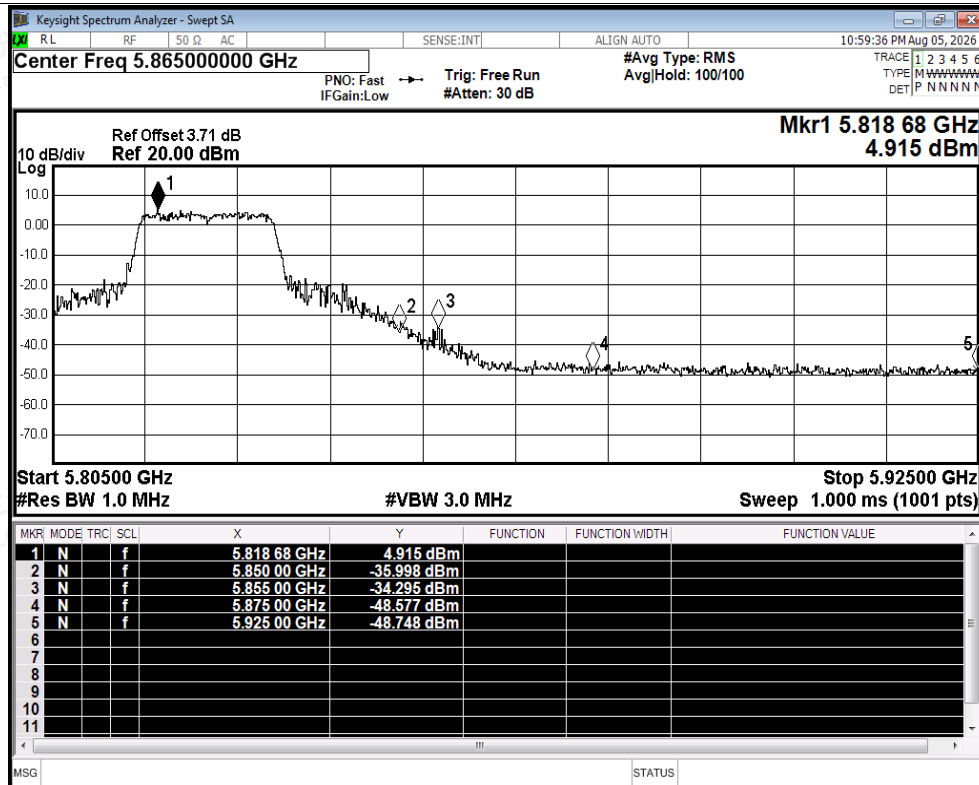


Restrict Band NVNT ac20 5825MHz Ant1 Peak

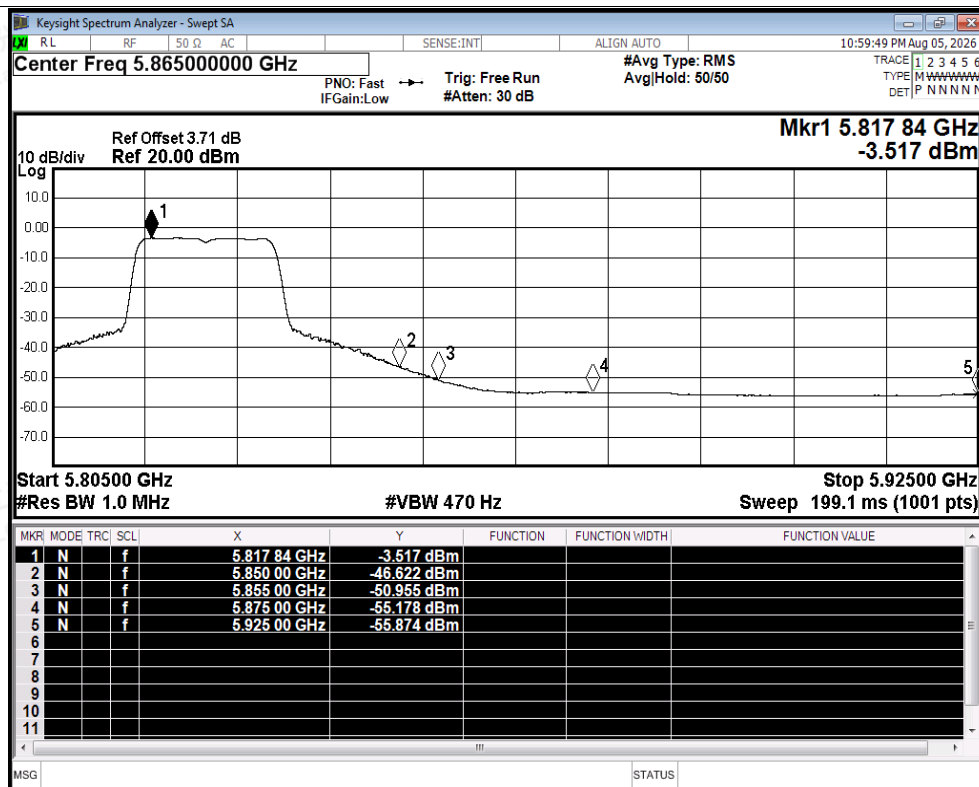


Restrict Band NVNT ac20 5825MHz Ant1 Average

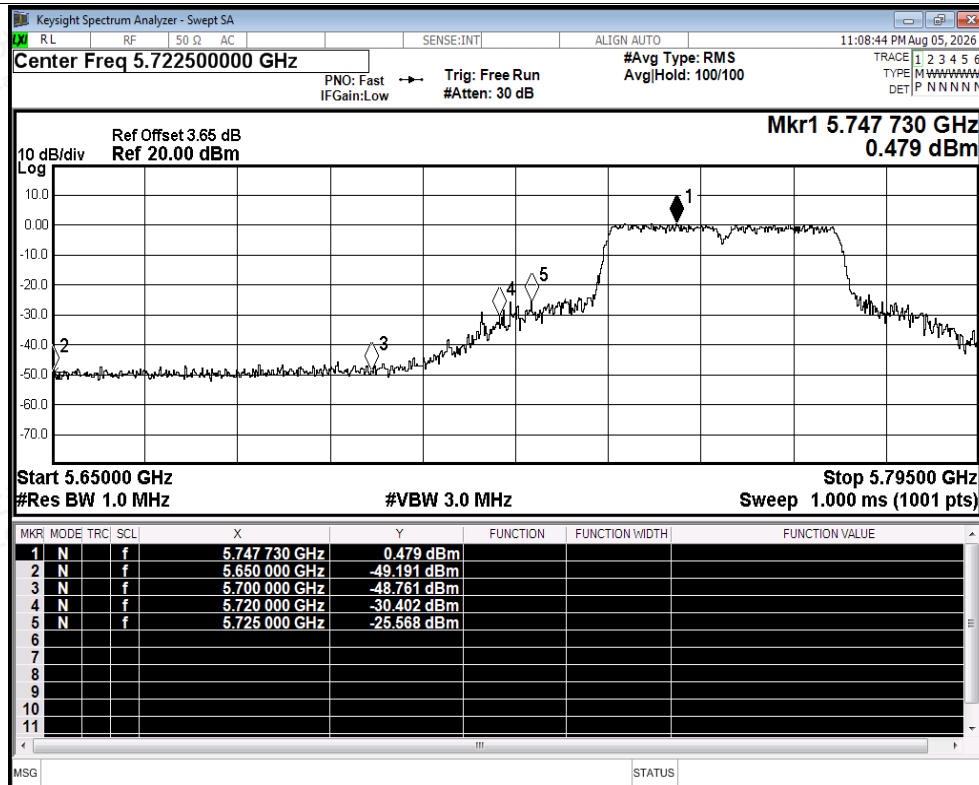


Restrict Band NVNT ac40 5755MHz Ant1 Peak

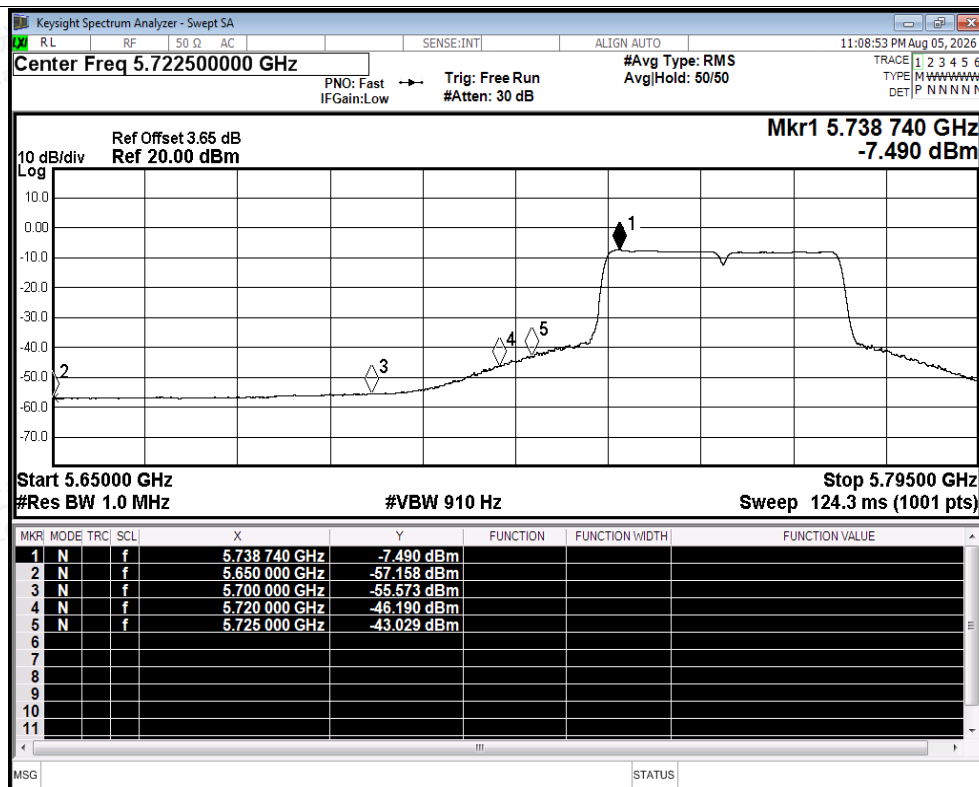


Restrict Band NVNT ac40 5755MHz Ant1 Average

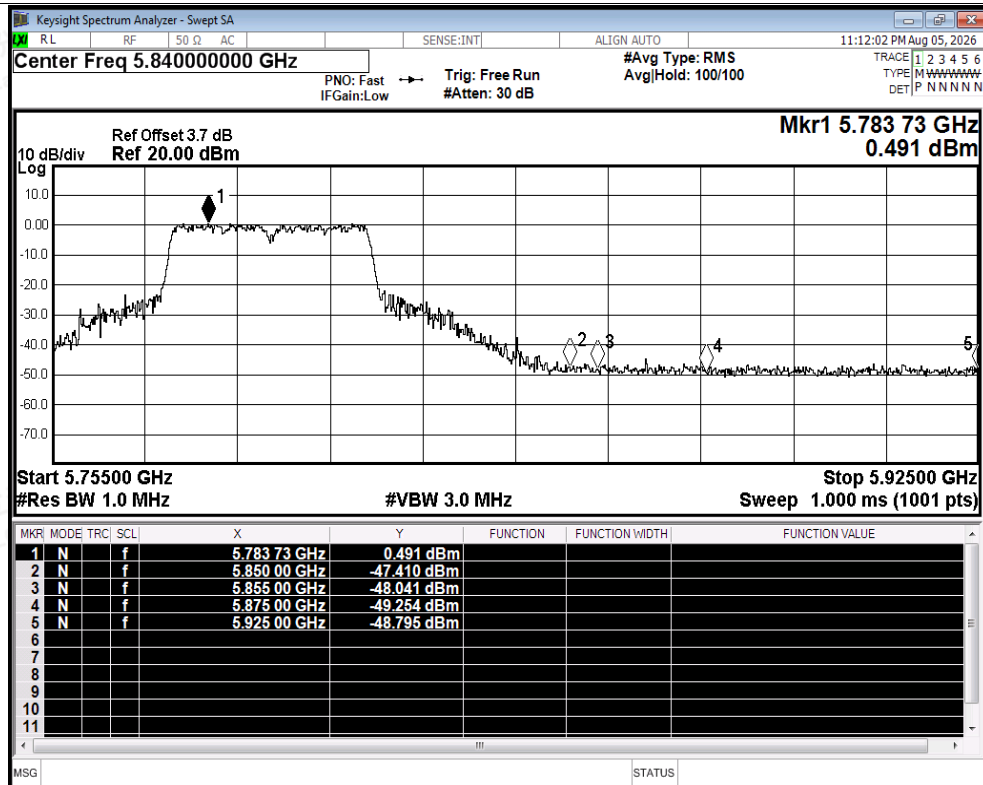


Restrict Band NVNT ac40 5795MHz Ant1 Peak

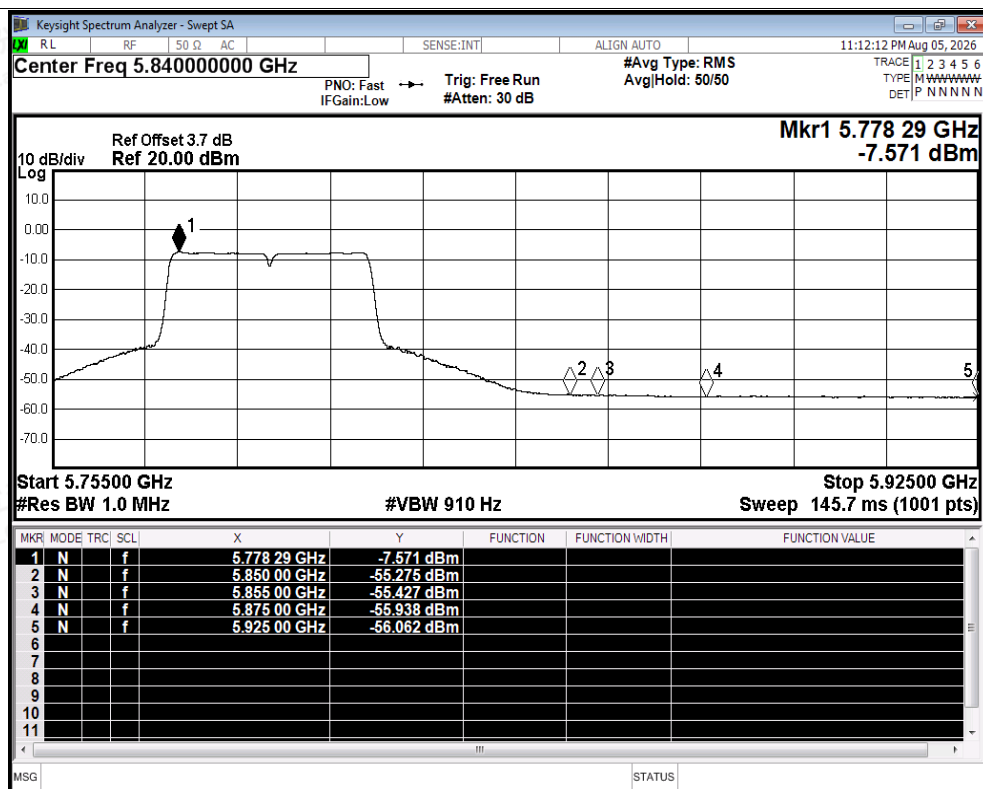


Restrict Band NVNT ac40 5795MHz Ant1 Average

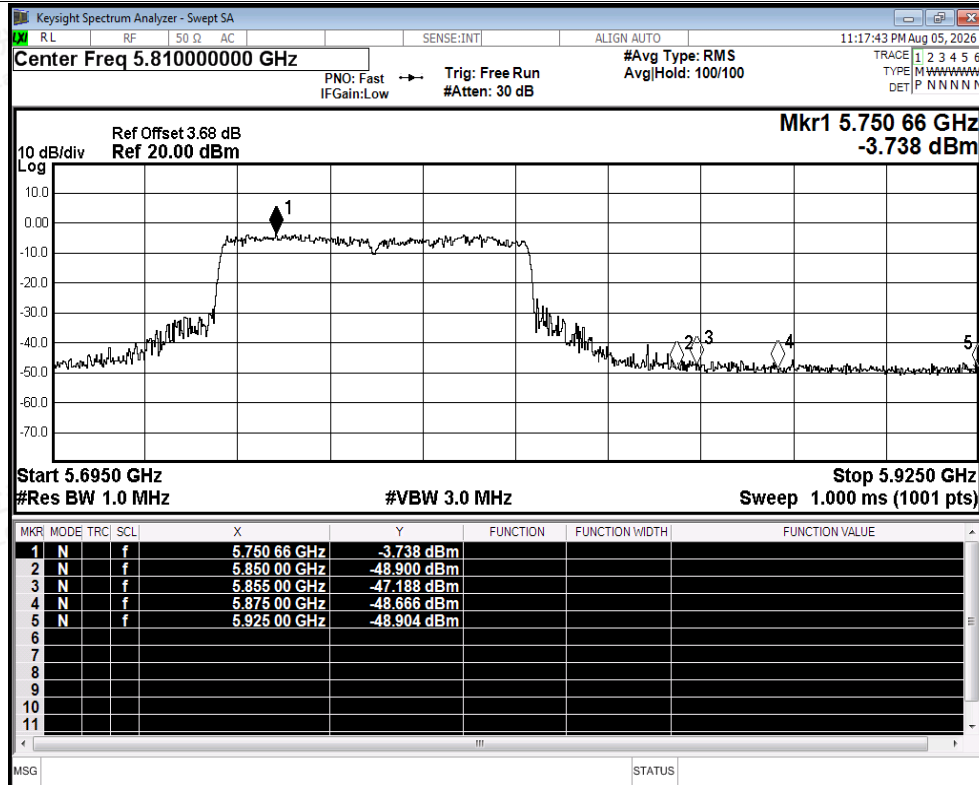


Restrict Band NVNT ac80 5775MHz Ant1 Peak

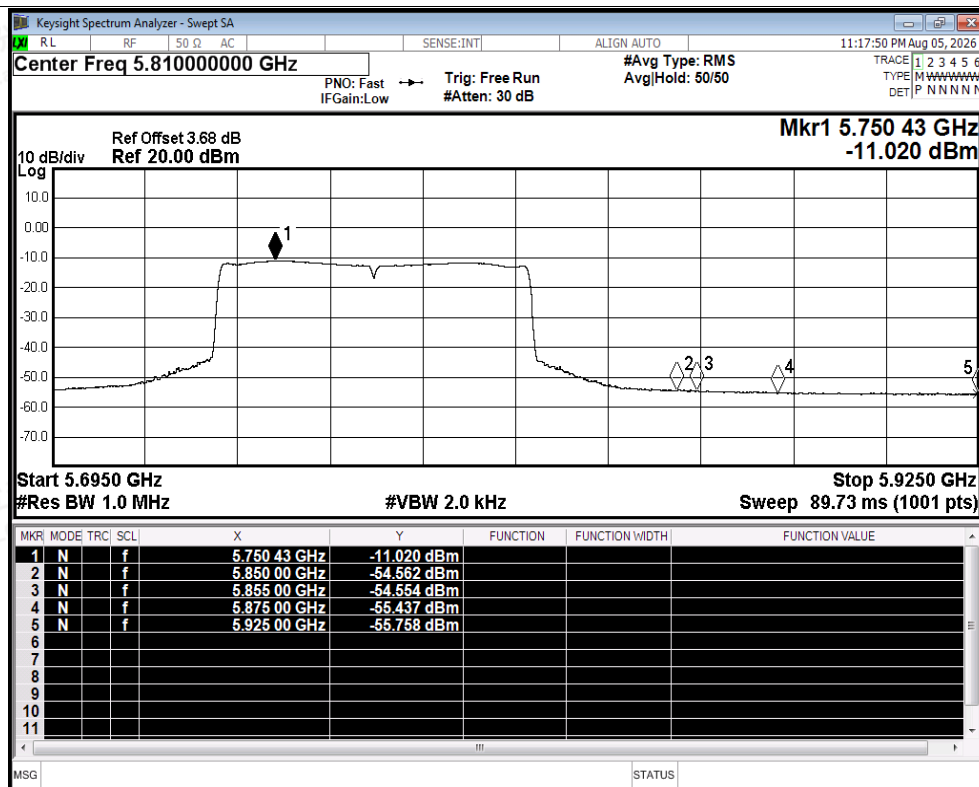

Restrict Band NVNT ac80 5775MHz Ant1 Average

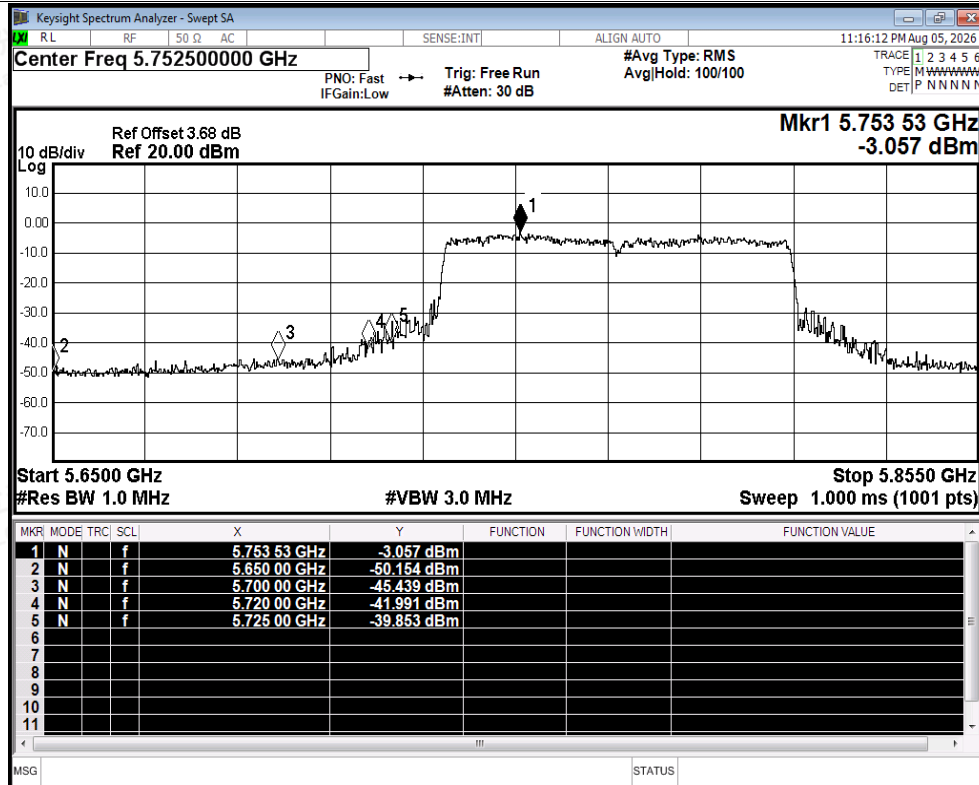

Restrict Band NVNT ac80 5775MHz Ant1 Peak

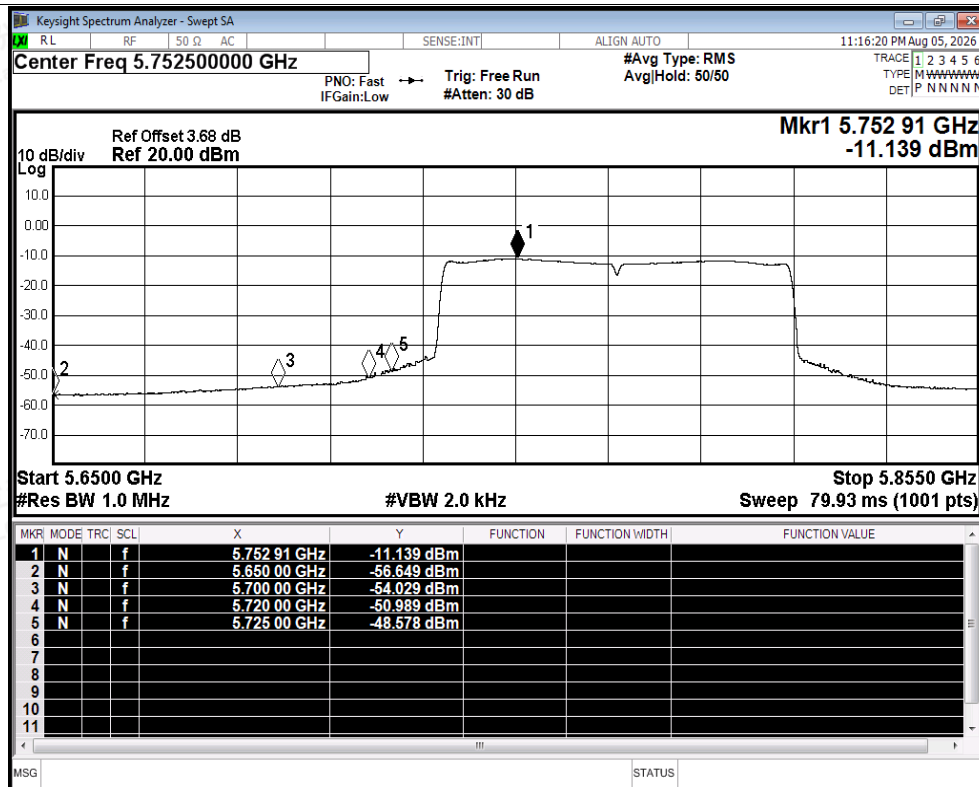

Restrict Band NVNT ac80 5775MHz Ant1 Average