



FCC RF Test Report

APPLICANT : Nokia Shanghai Bell Co., Ltd.
EQUIPMENT : Nokia FastMile 5G Gateway 12
BRAND NAME : Nokia
MODEL NAME : 5G31-03W-B
FCC ID : 2ADZR5G3103WB
STANDARD : 47 CFR Part 2, 96
CLASSIFICATION : Citizens Band End User Devices (CBE)
EQUIPMENT TYPE : End User Equipment
TEST DATE(S) : Apr. 03, 2024 ~ May. 09, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test.....	5
1.4 Maximum EIRP Power and Emission Designator	6
1.5 Testing Site.....	6
1.6 Test Software	7
1.7 Applied Standards	7
2 Test Configuration of Equipment Under Test	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration	9
2.4 Measurement Results Explanation Example	9
2.5 Frequency List of Low/Middle/High Channels.....	10
3 Conducted Test Items.....	11
3.1 Measuring Instruments.....	11
3.2 Test Setup	11
3.3 Conducted Output Power	12
3.4 EIRP and PSD.....	13
3.5 Occupied Bandwidth	14
3.6 Conducted Band Edge	15
3.7 Conducted Spurious Emission	16
3.8 Frequency Stability.....	17
4 Radiated Test Items	18
4.1 Measuring Instruments.....	18
4.2 Test Setup	18
4.3 Test Result of Radiated Test.....	19
4.4 Radiated Spurious Emission	20
5 List of Measuring Equipment.....	21
6 Measurement Uncertainty	22
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FG432101K	01	Initial issue of report	Jun. 21, 2024

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.3	§2.1046	Conducted Output Power	Reporting only	-
-	§96.41	Peak-to-Average Ratio	Not Applicable	Not applicable for End User Devices
3.4	§96.41	Maximum E.I.R.P	Pass	-
		Maximum Power Spectral Density	Not Applicable	Not applicable for End User Devices
3.5	§2.1049 §96.41	Occupied Bandwidth	Reporting only	-
3.6	§2.1051 §96.41	Conducted Band Edge Measurement Adjacent Channel Leakage Ratio	Pass	-
3.7	§2.1051 §96.41	Conducted Spurious Emission	Pass	
3.8	§2.1055	Frequency Stability for Temperature & Voltage	Pass	-
4.4	§2.1051 §96.41	Radiated Spurious Emission	Pass	Under limit 4.68 dB at 7209.00 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

Nokia Shanghai Bell Co., Ltd.

388#, Ningqiao Road, China (Shanghai) Pilot Free Trade Zone, Shanghai 201206, China

1.2 Manufacturer

Nokia Solutions and Networks Oy

Karakaari 7, 02610 Espoo, Finland

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Nokia FastMile 5G Gateway 12
Brand Name	Nokia
Model Name	5G31-03W-B
FCC ID	2ADZR5G3103WB
Tx Frequency	5G NR n48: 3550 MHz ~ 3700 MHz
Rx Frequency	5G NR n48: 3550 MHz ~ 3700 MHz
SCS	30kHz
Bandwidth	20MHz / 30MHz / 40MHz
Antenna Gain	<Ant. 1> 5G NR n48: 3.4 dBi <MIMO Ant. 0+1>(See Remark4) 5G NR n48: 1.7 dBi
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM
SN / IMEI Code	Conducted: KLT241102369(SN) Radiation: 355630740001412(IMEI)
HW Version	3TG03021Exxx (x may be from A to Z)
SW Version	5GGW-QCOM7X_D240200B31T0601E0496
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. 5G NR n48 supports SA mode work on Ant.1 and UL MIMO mode work on Ant.1+0.
3. For UL MIMO mode, MIMO Antenna gain is calculated according to KDB 662911 D01.
4. UL MIMO mode only support CP-OFDM Modulation, the conducted BE/Spurious are tested at single antenna port and add $10 \cdot \log(N_{\text{ANT}})$ according to KDB 662911 D01.
5. There are three samples under test, only different for the antenna manufacturers as below. According to the difference, we choose sample 1 to full test and the sample 2/3 are verified the RSE worse cases of NR in this report, and LTE in another report.



Ant Description	P/N	Vendor_1	Vendor_2	Vendor_3
Ant0&WiFi3_2.4G	3TG03393AAAA	GW12-A0W3	N42NKASA-PK1-D1X95BUD150U4LI	NKH049-15-000-R
Ant1&WiFi2_6G	3TG03394AAAA	GW12-A1W2	N40NKASB-PK1-E1X190BUE110U4LI	NKH050-15-000-R
Ant 2,Ant3,Ant5,Ant7	3TG03395AAAA	GW12-A2357	N40NKASC-PK1-R150U4LID115U4LI E165U4LIA105U4LI	NKH051-15-000-R
Ant4,Ant6&Ant9	3TG03396AAAA	GW12-A469	N40NKASD-PK1-A135U4LID170U4LI E200U4LI	NKH052-15-000-R
WiFi1_6G	3TG03397AAAA	GW12-W1	N06NKASF-PK1-A1X95BU	NKH053-15-000-R
WiFi4_2.4G	3TG03398AAAA	GW12-W4	N01NKASG-PK1-R1X160BU	NKH054-15-000-R
WiFi5_5G	3TG03399AAAA	GW12-W5	N02NKASH-PK1-D1X90BU	NKH055-15-000-R
Ant8&WiFi6_5G	3TG03400AAAA	GW12-A8W6	N43NKASE-PK1-E1X95BUA165U4LI	NKH056-15-000-R
WiFi7_5G	3TG03401AAAA	GW12-W7	N02NKASJ-PK1-A1X95BU	NKH057-15-000-R
WiFi8_5G	3TG03402AAAA	GW12-W8	N02NKASK-PK1-R1X115BU	NKH058-15-000-R

1.4 Maximum EIRP Power and Emission Designator

5G NR n48 SISO		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	3560.01~3690.00	0.1694	18M2G7D	0.1340	18M2W7D
30	3565.02~3684.99	0.1581	27M9G7D	0.1396	27M9W7D
40	3570.00~3679.98	0.1718	38M0G7D	0.1361	38M0W7D

5G NR n48 UL MIMO		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	3560.01~3690.00	0.1683	18M2G7D	0.1396	18M2W7D
30	3565.02~3684.99	0.1671	27M8G7D	0.1406	27M9W7D
40	3570.00~3679.98	0.1690	38M0G7D	0.1510	38M0W7D

1.5 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test data subcontracted: Conducted test cases in section 3 of this report.

1.6 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH04-KS	AUDIX	E3	210616

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 2, 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 940660 D01 Part 96 CBRS v03
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

Test Items	Band	Bandwidth (MHz)						Modulation					RB #			Test Channel		
		1.4	10	15	20	30	40	PI/2 BPSK	QPSK	16 QAM	64 QAM	256 QAM	1	Half	Full	L	M	H
Max. Output Power	n48	-	-	-	v	v	v	v	v	v	v	v	v		v	v	v	v
Adjacent Channel Leakage Ratio	n48	-	-	-	v		v	v	v				v		v	v	v	v
26dB and 99% Bandwidth	n48	-	-	-	v	v	v		v	v	v	v			v		v	
Conducted Band Edge	n48	-	-	-	v	v	v	v	v				v		v	v	v	v
Conducted Spurious Emission	n48	-	-	-	v	v	v	v	v				v			v	v	v
E.I.R.P	n48	-	-	-	v	v	v	v	v	v	v	v	v		v	v	v	v
Frequency Stability	n48	-	-	-	v				v						v		v	
Radiated Spurious Emission	n48	Worst Case															v	
Remark	1. The mark “v” means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Frequency Stability : Normal Voltage = 12.0V ; Low Voltage =10.8V. ; High Voltage =13.2V																	

2.2 Connection Diagram of Test System

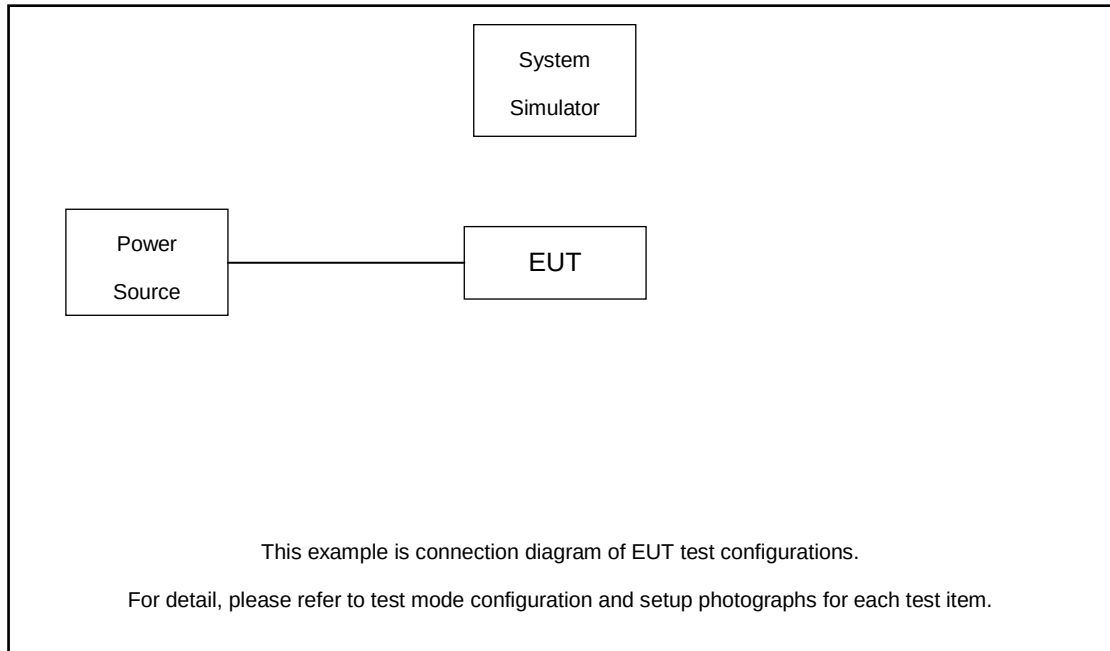

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
3.	Fixture	INTEL	NGFF Card Carrier	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 8.9 dB.

Example :

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} \\
 &= 8.9 \text{ (dB)}
 \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

5G NR n48 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	638000	641666	645332
	Frequency	3570	3624.99	3679.98
30	Channel	637668	641666	645666
	Frequency	3565.02	3624.99	3684.99
20	Channel	637334	641666	646000
	Frequency	3560.01	3624.99	3690


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power / ACLR

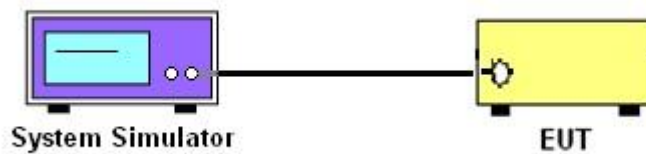

3.2.2 26dB & 99% Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

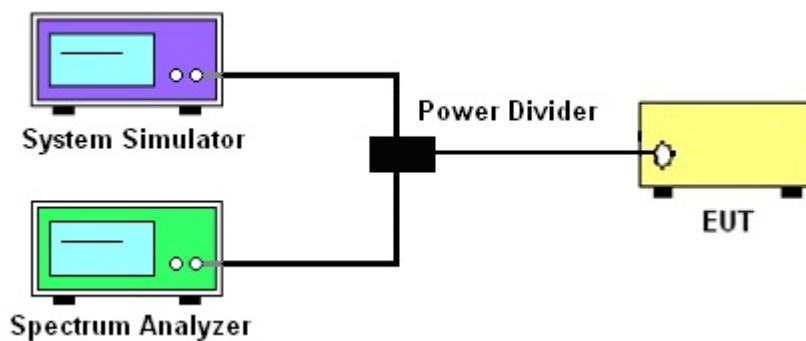

3.2.3 Frequency Stability

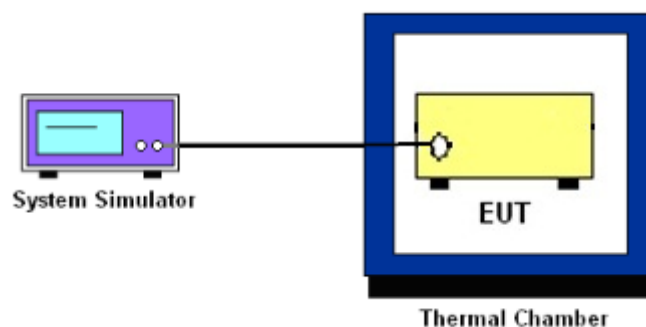

3.2.4 Test Result of Conducted Test

Please refer to Appendix A.

3.3 Conducted Output Power

3.3.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.3.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.4 EIRP

3.4.1 Description of the EIRP Measurement

EIRP limits for CBRS equipment as below table:

Device		Maximum EIRP (dBm/10 MHz)	Maximum PSD (dBm/MHz)
Applied	End User Device	23	n/a
☐	Category A CBSD	30	20
☐	Category B CBSD	47	37

Remark: The worst case EIRP shown in this section is found with LTE operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for LTE Band 48 (i.e. 5, 10, 15, 20MHz)

3.4.2 Test Procedures for EIRP

1. Establishing a communications link with the call box (Base station) to measure the Maximum conducted power, the parameters were set to force the EUT transmitting at maximum output power level. Use the average power measurement function to measure total channel power of each channel bandwidth (per ANSI C63.26-2015 Section 5.2.1)
2. Determining ERP and/or EIRP from conducted RF output power measurements (Per ANSI C63.26-2015 Section 5.2.5.5)
$$\text{EIRP} = P_T + G_T - L_C, \text{ ERP} = \text{EIRP} - 2.15, \text{ where}$$
$$P_T = \text{transmitter output power in dBm}$$
$$G_T = \text{gain of the transmitting antenna in dBi}$$
$$L_C = \text{signal attenuation in the connecting cable between the transmitter and antenna in dB}$$

3.5 Occupied Bandwidth

3.5.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.5.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.6 Conducted Band Edge

3.6.1 Description of Conducted Band Edge Measurement

Part 96.41 (e) (1) (i)

For CBSD the emission limits outside the fundamental are as follows:

Within 0 MHz to 10 MHz above and below the assigned channel ≤ -13 dBm/MHz

Greater than 10 MHz above and below the assigned channel ≤ -25 dBm/MHz

Part 96.41 (e) (1) (ii)

For End User Devices the emission limits outside the fundamental are as follows:

Within 0 MHz to B MHz above and below the assigned channel ≤ -13 dBm/MHz

Greater than B MHz above and below the assigned channel ≤ -25 dBm/MHz

where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device.

Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

Part 96.41 (e) (2)

For CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
5. Offset has included the duty factor for LTE Band 48. Duty factor $=10 \log (1/x)$, where x is the measured duty cycle.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7 Conducted Spurious Emission

3.7.1 Description of Conducted Spurious Emission Measurement

96.41 (e)(2)

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

3.7.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is -40dBm/MHz.

3.8 Frequency Stability

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.8.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

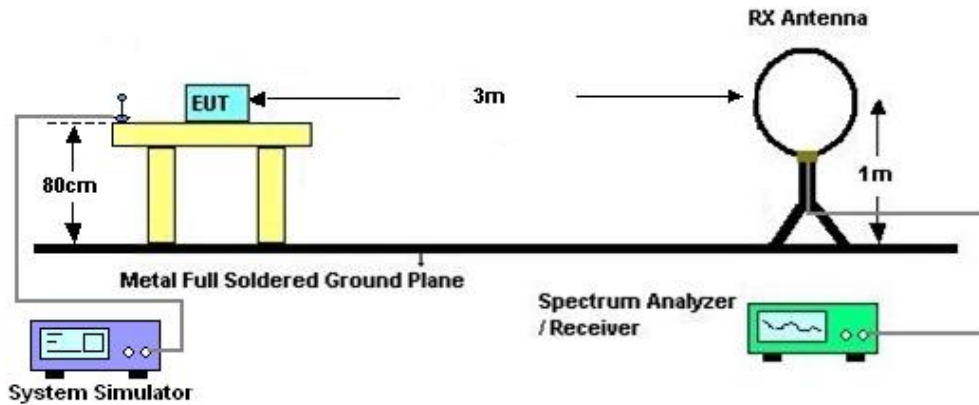

4.2.2 For radiated test from 30MHz to 1GHz

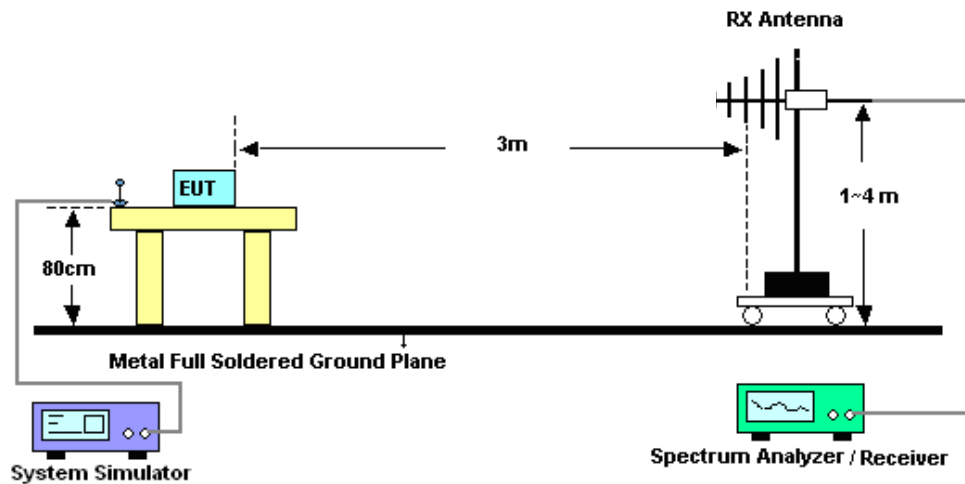

4.2.3 For radiated test above 1GHz

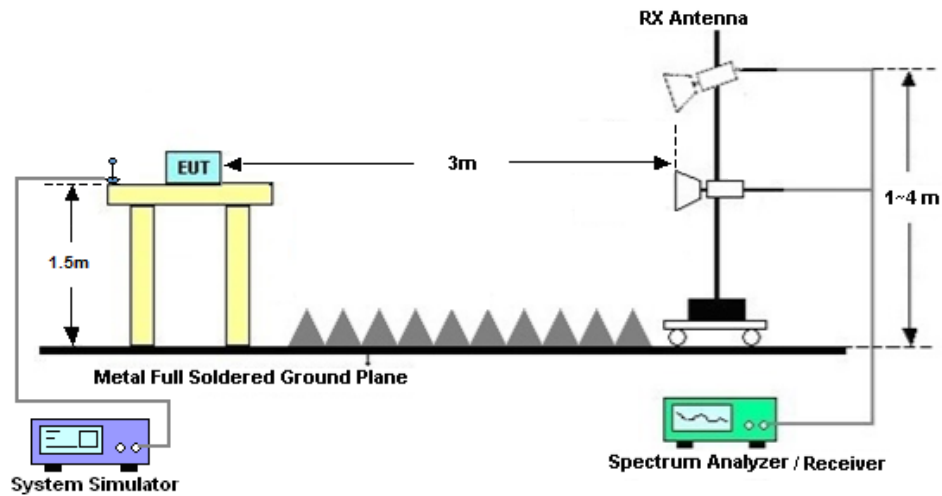

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI C63.26-2015.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is -40dBm/MHz



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2023	Apr. 03, 2024~Apr. 21, 2024	Jul. 06, 2024	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct. 16, 2023	Apr. 03, 2024~Apr. 21, 2024	Oct. 15, 2024	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04265	60.06.020.0077	0.4GHz~26.5GHz	Dec. 25, 2023	Apr. 03, 2024~Apr. 21, 2024	Dec. 24, 2024	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 05, 2023	Apr. 03, 2024~Apr. 21, 2024	Jul. 04, 2024	Conducted (TH01-SZ)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz~44G,MAX 30dB	Oct. 10, 2023	May 09, 2024	Oct. 09, 2024	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	May 09, 2024	Sep. 10, 2024	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz~1GHz	Aug. 19, 2023	May 09, 2024	Aug. 18, 2024	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00251694	1GHz~18GHz	Jul. 12, 2023	May 09, 2024	Jul. 11, 2024	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2024	May 09, 2024	Jan. 04, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	380827	9KHz~1GHz	Jul. 06, 2023	May 09, 2024	Jul. 05, 2024	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2024	May 09, 2024	Jan. 04, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18GA	060840	1Ghz~18Ghz	Oct. 10, 2023	May 09, 2024	Oct. 09, 2024	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A02370	1Ghz~18Ghz	Oct. 10, 2023	May 09, 2024	Oct. 09, 2024	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	May 09, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	May 09, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	May 09, 2024	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

6 Measurement Uncertainty

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Density	±1.32 dB
Peak to Average Ratio	±1.34 dB
Frequency Stability	±1.3 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.82 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Lorenzo Liu	Temperature :	24~26°C
		Relative Humidity :	50~53%

FR1 N48(ANT1)

Transmitter Conducted Output Power And EIRP, ($G_T - L_C$)=3.4dB

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@1	18.89	22.29	0.1694
48	30	20	637334	3560.01	DFT-s-OFDM 16 QAM	1@1	17.87	21.27	0.1340
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@1	18.42	21.82	0.1521
48	30	20	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	17.24	20.64	0.1159
48	30	20	646000	3690	DFT-s-OFDM QPSK	1@1	18.5	21.9	0.1549
48	30	20	646000	3690	DFT-s-OFDM 16 QAM	1@1	17.56	20.96	0.1247
48	30	30	637668	3565.02	DFT-s-OFDM QPSK	1@1	18.5	21.9	0.1549
48	30	30	637668	3565.02	DFT-s-OFDM 16 QAM	1@1	18.05	21.45	0.1396
48	30	30	641666	3624.99	DFT-s-OFDM QPSK	1@1	18.45	21.85	0.1531
48	30	30	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	17.52	20.92	0.1236
48	30	30	645666	3684.99	DFT-s-OFDM QPSK	1@1	18.59	21.99	0.1581
48	30	30	645666	3684.99	DFT-s-OFDM 16 QAM	1@1	17.64	21.04	0.1271
48	30	40	638000	3570	DFT-s-OFDM PI/2 BPSK	50@25	18.83	22.23	0.1671
48	30	40	638000	3570	DFT-s-OFDM PI/2 BPSK	1@1	18.95	22.35	0.1718
48	30	40	638000	3570	DFT-s-OFDM PI/2 BPSK	1@104	18.37	21.77	0.1503
48	30	40	638000	3570	DFT-s-OFDM QPSK	50@25	18.74	22.14	0.1637
48	30	40	638000	3570	DFT-s-OFDM QPSK	1@1	18.83	22.23	0.1671
48	30	40	638000	3570	DFT-s-OFDM QPSK	1@104	18.27	21.67	0.1469
48	30	40	638000	3570	DFT-s-OFDM 16 QAM	50@25	17.71	21.11	0.1291
48	30	40	638000	3570	DFT-s-OFDM 16 QAM	1@1	17.94	21.34	0.1361
48	30	40	638000	3570	DFT-s-OFDM 16 QAM	1@104	17.47	20.87	0.1222
48	30	40	638000	3570	DFT-s-OFDM 64 QAM	50@25	16.23	19.63	0.0918
48	30	40	638000	3570	DFT-s-OFDM 64 QAM	1@1	16.37	19.77	0.0948
48	30	40	638000	3570	DFT-s-OFDM 64 QAM	1@104	15.75	19.15	0.0822
48	30	40	638000	3570	DFT-s-OFDM 256 QAM	50@25	14.21	17.61	0.0577
48	30	40	638000	3570	DFT-s-OFDM 256 QAM	1@1	14.34	17.74	0.0594
48	30	40	638000	3570	DFT-s-OFDM 256 QAM	1@104	13.83	17.23	0.0528
48	30	40	638000	3570	CP-OFDM QPSK	53@26	17.17	20.57	0.1140
48	30	40	638000	3570	CP-OFDM QPSK	1@1	17.42	20.82	0.1208
48	30	40	638000	3570	CP-OFDM QPSK	1@104	16.95	20.35	0.1084
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	50@25	18.59	21.99	0.1581
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@1	18.44	21.84	0.1528
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@104	18.25	21.65	0.1462
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	50@25	18.57	21.97	0.1574
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@1	18.4	21.8	0.1514
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@104	18.18	21.58	0.1439

48	30	40	641666	3624.99	DFT-s-OFDM 16 QAM	50@25	17.54	20.94	0.1242
48	30	40	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	17.48	20.88	0.1225
48	30	40	641666	3624.99	DFT-s-OFDM 16 QAM	1@104	17.3	20.7	0.1175
48	30	40	641666	3624.99	DFT-s-OFDM 64 QAM	50@25	15.97	19.37	0.0865
48	30	40	641666	3624.99	DFT-s-OFDM 64 QAM	1@1	15.97	19.37	0.0865
48	30	40	641666	3624.99	DFT-s-OFDM 64 QAM	1@104	15.74	19.14	0.0820
48	30	40	641666	3624.99	DFT-s-OFDM 256 QAM	50@25	14.01	17.41	0.0551
48	30	40	641666	3624.99	DFT-s-OFDM 256 QAM	1@1	13.91	17.31	0.0538
48	30	40	641666	3624.99	DFT-s-OFDM 256 QAM	1@104	13.79	17.19	0.0524
48	30	40	641666	3624.99	CP-OFDM QPSK	53@26	16.92	20.32	0.1076
48	30	40	641666	3624.99	CP-OFDM QPSK	1@1	17.01	20.41	0.1099
48	30	40	641666	3624.99	CP-OFDM QPSK	1@104	16.81	20.21	0.1050
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	50@25	18.65	22.05	0.1603
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@1	18.44	21.84	0.1528
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@104	18.29	21.69	0.1476
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	50@25	18.53	21.93	0.1560
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@1	18.42	21.82	0.1521
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@104	18.21	21.61	0.1449
48	30	40	645332	3679.98	DFT-s-OFDM 16 QAM	50@25	17.53	20.93	0.1239
48	30	40	645332	3679.98	DFT-s-OFDM 16 QAM	1@1	17.5	20.9	0.1230
48	30	40	645332	3679.98	DFT-s-OFDM 16 QAM	1@104	17.23	20.63	0.1156
48	30	40	645332	3679.98	DFT-s-OFDM 64 QAM	50@25	16.05	19.45	0.0881
48	30	40	645332	3679.98	DFT-s-OFDM 64 QAM	1@1	15.87	19.27	0.0845
48	30	40	645332	3679.98	DFT-s-OFDM 64 QAM	1@104	15.68	19.08	0.0809
48	30	40	645332	3679.98	DFT-s-OFDM 256 QAM	50@25	14.05	17.45	0.0556
48	30	40	645332	3679.98	DFT-s-OFDM 256 QAM	1@1	13.77	17.17	0.0521
48	30	40	645332	3679.98	DFT-s-OFDM 256 QAM	1@104	13.63	17.03	0.0505
48	30	40	645332	3679.98	CP-OFDM QPSK	53@26	17.02	20.42	0.1102
48	30	40	645332	3679.98	CP-OFDM QPSK	1@1	16.95	20.35	0.1084
48	30	40	645332	3679.98	CP-OFDM QPSK	1@104	16.88	20.28	0.1067


Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0023	PASS	NV
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0062	PASS	LV
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0067	PASS	HV
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0055	PASS	-30°C
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0054	PASS	-20°C
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0067	PASS	-10°C
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0068	PASS	0°C
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0044	PASS	10°C
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0023	PASS	20°C
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0038	PASS	30°C
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0042	PASS	40°C
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	0.0021	PASS	50°C


Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
48	30	20	641666	3624.99	CP-OFDM QPSK	51@0	18.198	19.34
48	30	20	641666	3624.99	CP-OFDM 16 QAM	51@0	18.18	19.57
48	30	20	641666	3624.99	CP-OFDM 64 QAM	51@0	18.181	19.43
48	30	20	641666	3624.99	CP-OFDM 256 QAM	51@0	18.234	19.69
48	30	30	641666	3624.99	CP-OFDM QPSK	78@0	27.856	29.43
48	30	30	641666	3624.99	CP-OFDM 16 QAM	78@0	27.874	29.57
48	30	30	641666	3624.99	CP-OFDM 64 QAM	78@0	27.94	29.07
48	30	30	641666	3624.99	CP-OFDM 256 QAM	78@0	27.789	29.18
48	30	40	641666	3624.99	CP-OFDM QPSK	106@0	37.981	39.11
48	30	40	641666	3624.99	CP-OFDM 16 QAM	106@0	37.837	39.11
48	30	40	641666	3624.99	CP-OFDM 64 QAM	106@0	37.998	39.49
48	30	40	641666	3624.99	CP-OFDM 256 QAM	106@0	37.955	39.54


N48(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

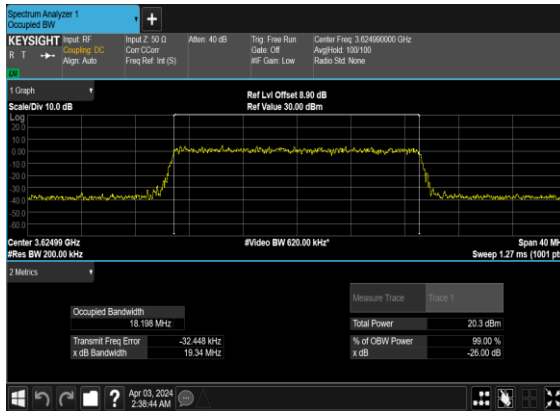


N48(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

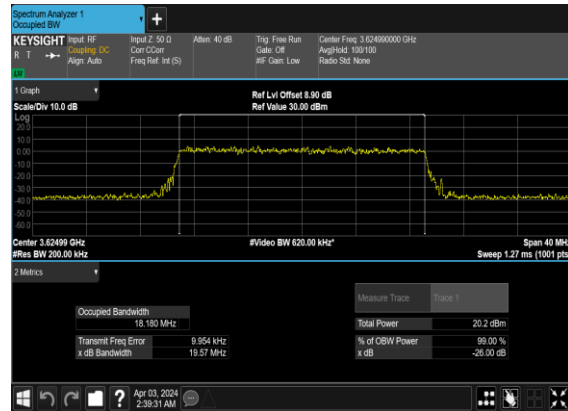


N48(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

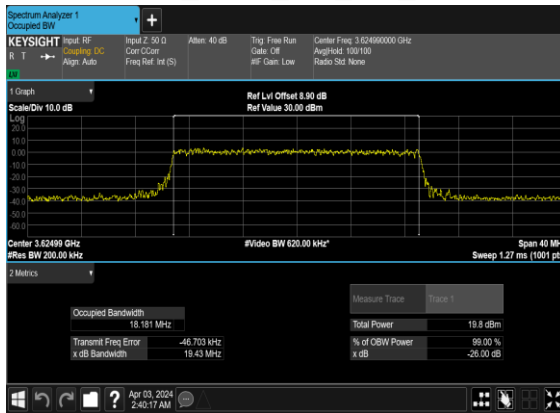


N48(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

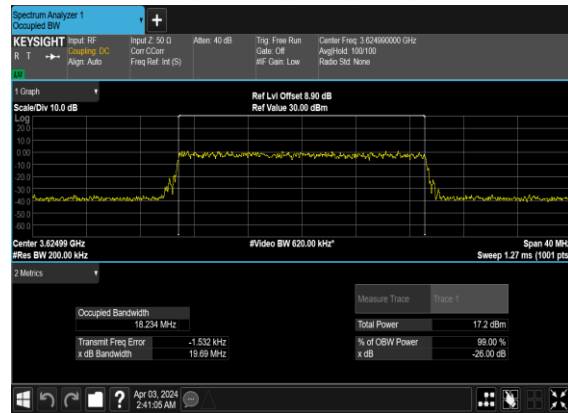


N48(30M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

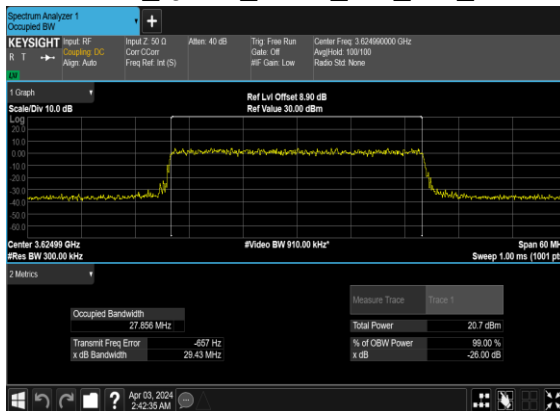


N48(30M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

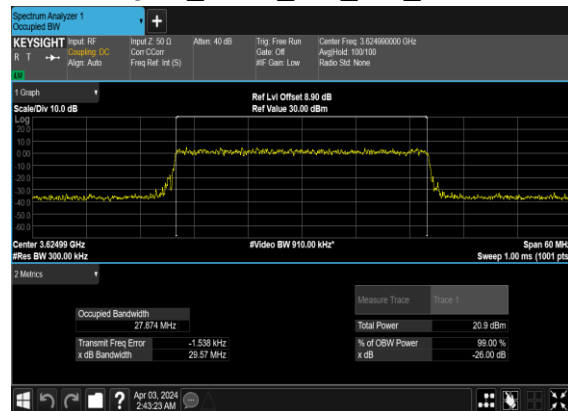


N48(30M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

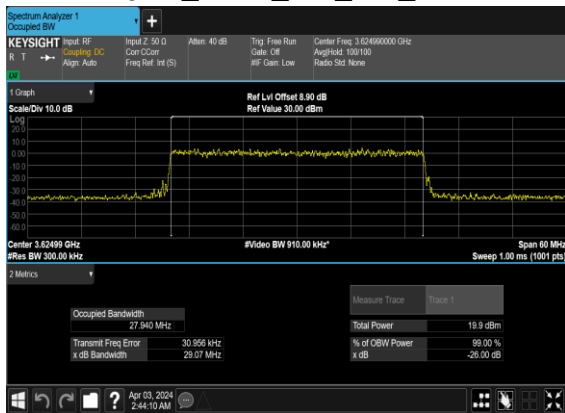


N48(30M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

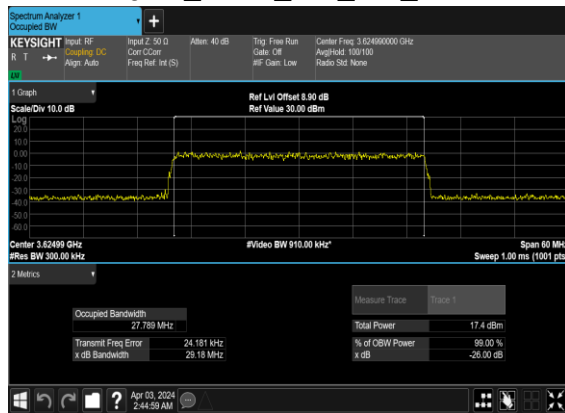


N48(40M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

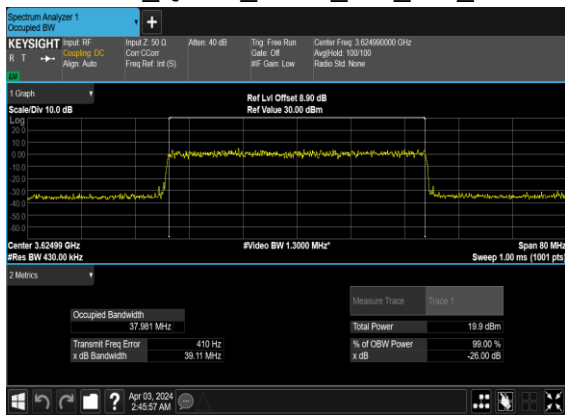


N48(40M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

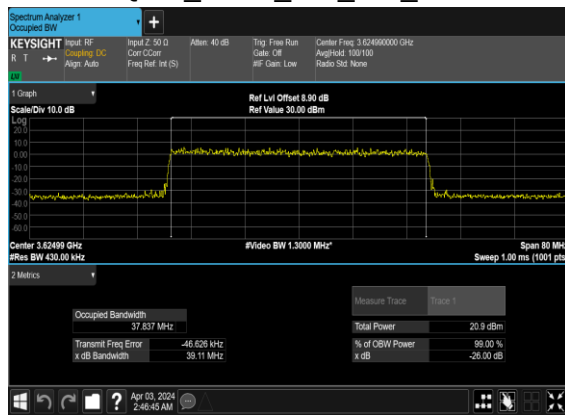

N48(40M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

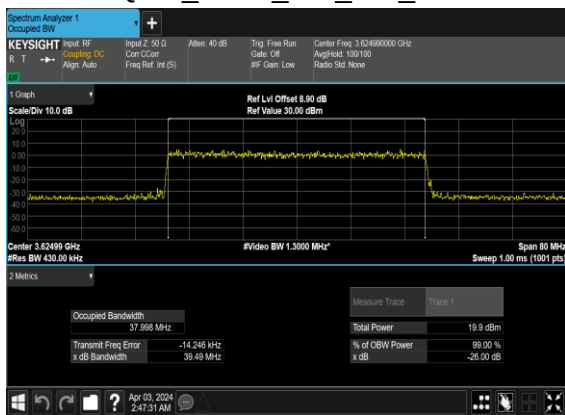

N48(40M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

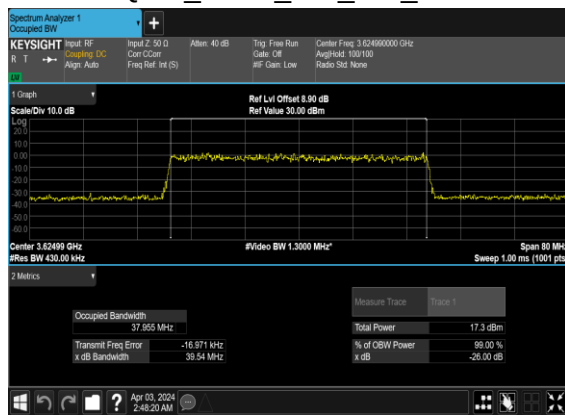


Adjacent Channel Leakage Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Lower Margin	Upper Margin	Result	Verdict
48	30	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	50@0	-16.31	-17.65	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	1@0	-9.99	-19.92	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	1@50	-20.83	-12.63	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	50@0	-14.3	-15.13	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	-12.95	-20.11	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@50	-18.87	-11.84	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	50@0	-14.03	-15.0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	-10.9	-16.05	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@50	-16.24	-11.99	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	-13.26	-14.22	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	-11.16	-15.05	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@50	-16.04	-12.21	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM PI/2 BPSK	50@0	-13.78	-14.48	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM PI/2 BPSK	1@0	-10.1	-14.75	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM PI/2 BPSK	1@50	-14.6	-10.68	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	50@0	-12.61	-13.31	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	-9.89	-14.24	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@50	-14.86	-10.95	see graph	PASS
48	30	30	637668	3565.02	DFT-s-OFDM PI/2 BPSK	75@0	-13.48	-13.97	see graph	PASS
48	30	30	637668	3565.02	DFT-s-OFDM PI/2 BPSK	1@0	-13.46	-15.19	see graph	PASS
48	30	30	637668	3565.02	DFT-s-OFDM PI/2 BPSK	1@77	-16.15	-13.93	see graph	PASS
48	30	30	637668	3565.02	DFT-s-OFDM QPSK	75@0	-12.14	-12.69	see graph	PASS


48	30	30	637668	3565.02	DFT-s-OFDM QPSK	1@0	-12.48	-14.86	see graph	PASS
48	30	30	637668	3565.02	DFT-s-OFDM QPSK	1@77	-13.17	-11.19	see graph	PASS
48	30	30	641666	3624.99	DFT-s-OFDM PI/2 BPSK	75@0	-13.3	-13.48	see graph	PASS
48	30	30	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	-12.43	-14.07	see graph	PASS
48	30	30	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@77	-13.9	-11.67	see graph	PASS
48	30	30	641666	3624.99	DFT-s-OFDM QPSK	75@0	-12.2	-12.69	see graph	PASS
48	30	30	641666	3624.99	DFT-s-OFDM QPSK	1@0	-11.89	-13.65	see graph	PASS
48	30	30	641666	3624.99	DFT-s-OFDM QPSK	1@77	-13.64	-11.68	see graph	PASS
48	30	30	645666	3684.99	DFT-s-OFDM PI/2 BPSK	75@0	-13.15	-12.95	see graph	PASS
48	30	30	645666	3684.99	DFT-s-OFDM PI/2 BPSK	1@0	-12.67	-14.09	see graph	PASS
48	30	30	645666	3684.99	DFT-s-OFDM PI/2 BPSK	1@77	-12.36	-10.31	see graph	PASS
48	30	30	645666	3684.99	DFT-s-OFDM QPSK	75@0	-11.46	-11.72	see graph	PASS
48	30	30	645666	3684.99	DFT-s-OFDM QPSK	1@0	-11.52	-13.26	see graph	PASS
48	30	30	645666	3684.99	DFT-s-OFDM QPSK	1@77	-13.0	-11.03	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM PI/2 BPSK	100@0	-12.72	-13.09	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM PI/2 BPSK	1@0	-12.6	-14.49	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM PI/2 BPSK	1@105	-13.72	-11.61	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	100@0	-11.72	-12.24	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	-12.41	-14.02	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@105	-13.82	-11.79	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	100@0	-11.91	-12.0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	-11.98	-13.52	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@105	-11.68	-9.76	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	100@0	-11.3	-11.4	see graph	PASS

48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	-12.02	-12.37	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@105	-12.44	-10.35	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	100@0	-12.26	-11.79	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@0	-10.67	-12.03	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@105	-12.65	-10.52	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	100@0	-11.48	-11.2	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	-10.58	-11.33	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@105	-12.16	-10.13	see graph	PASS


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH

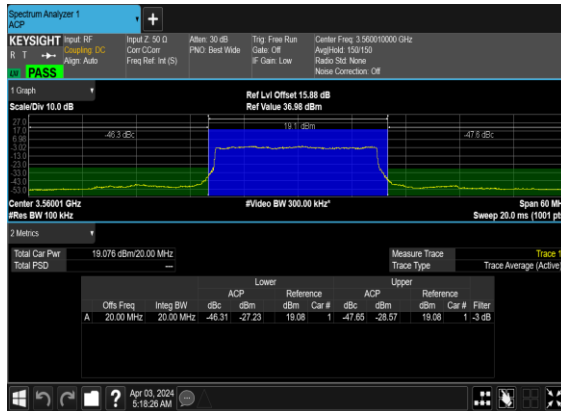


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH

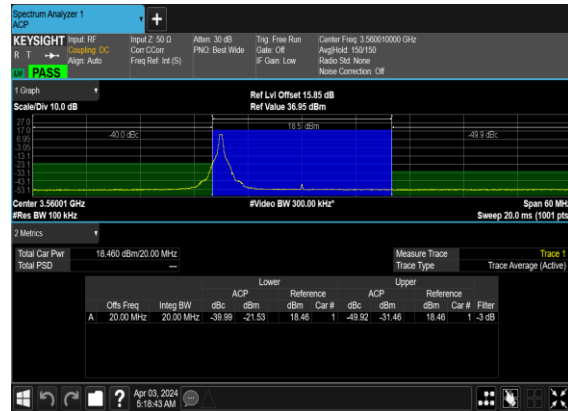


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_Low_CH

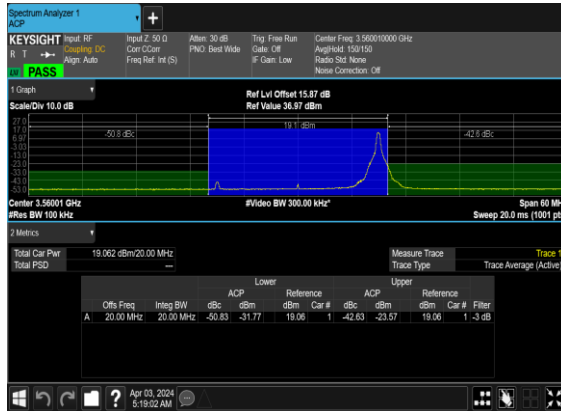


N48(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

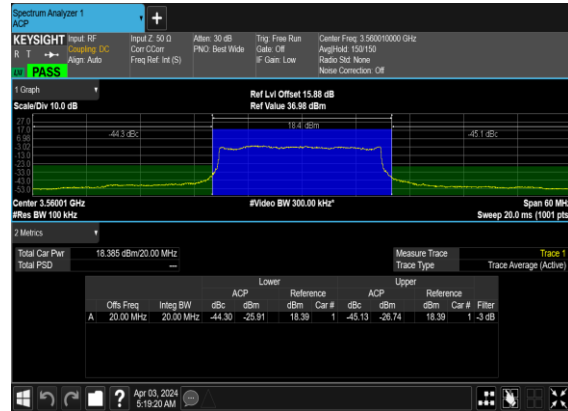


N48(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

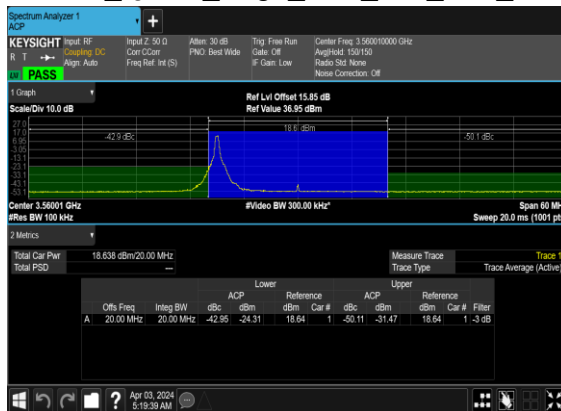


N48(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Low_CH

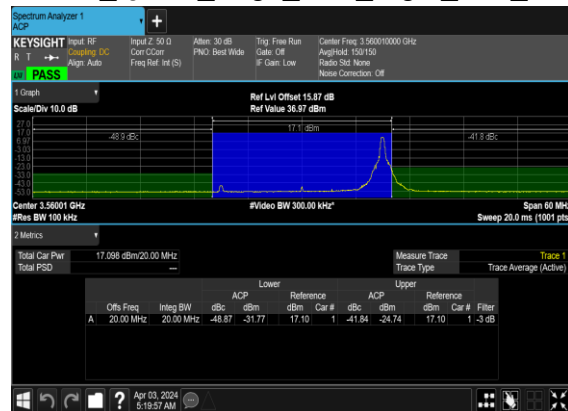


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

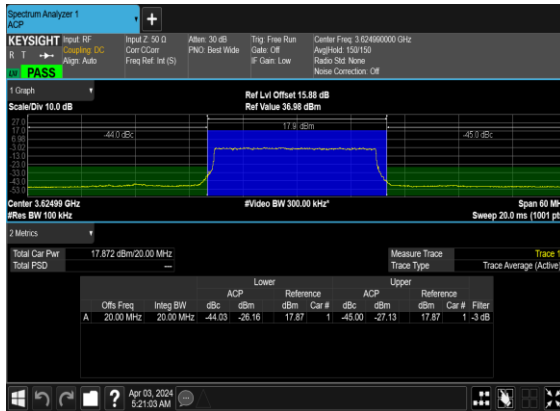


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

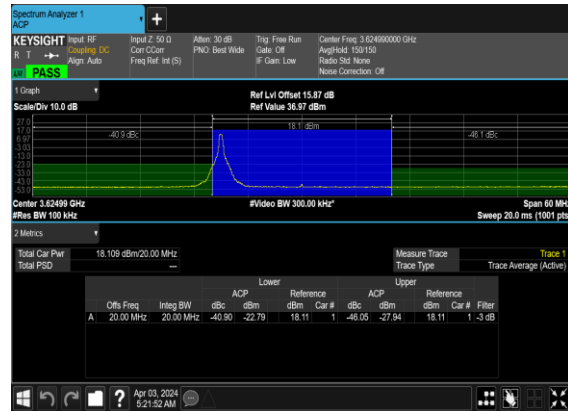


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_Mid_CH

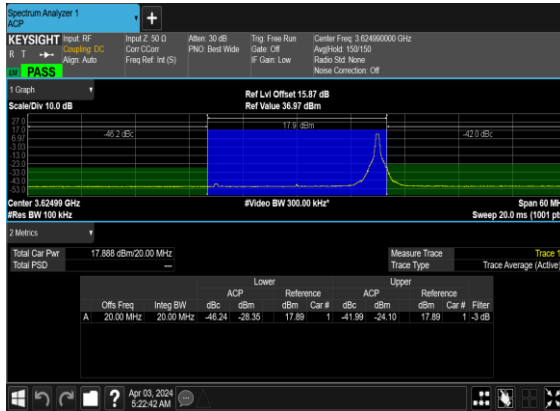


N48(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

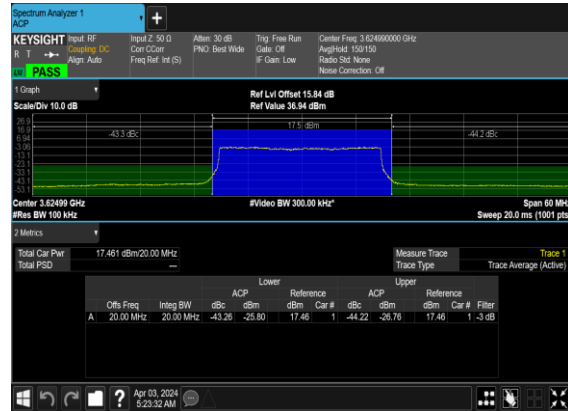


N48(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

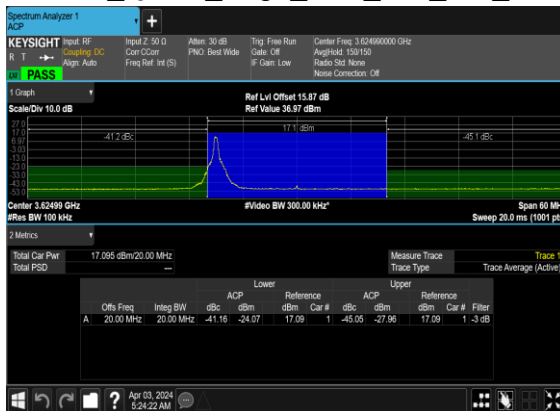


N48(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Mid_CH

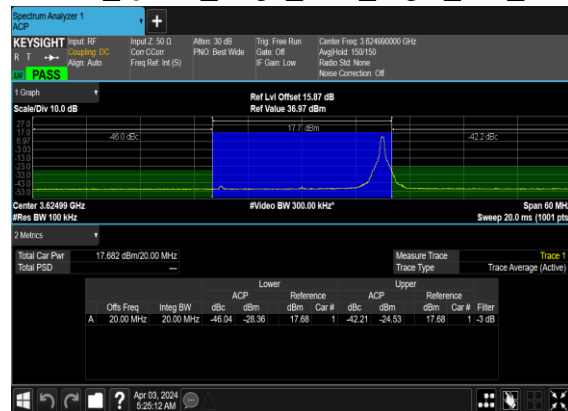


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_High_CH

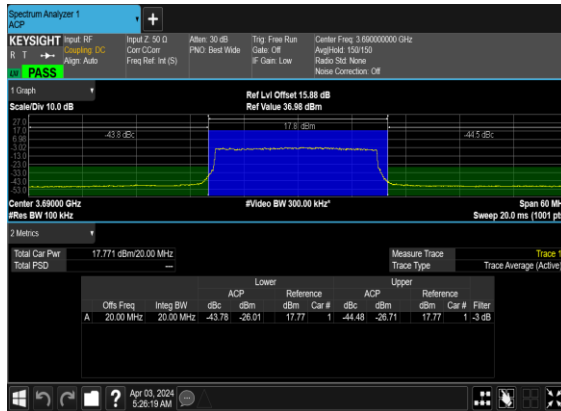


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_High_CH

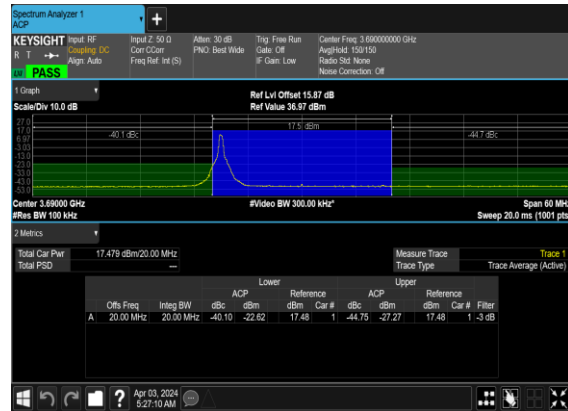


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_High_CH

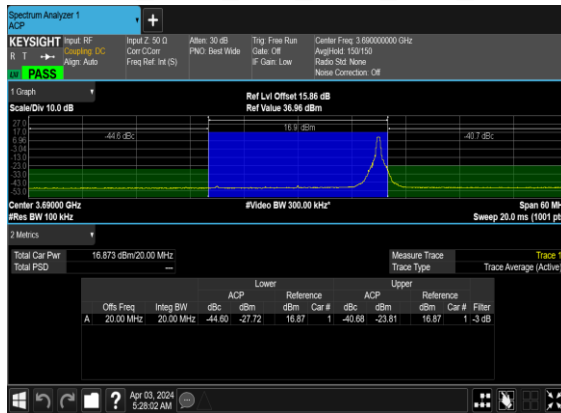


N48(20M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

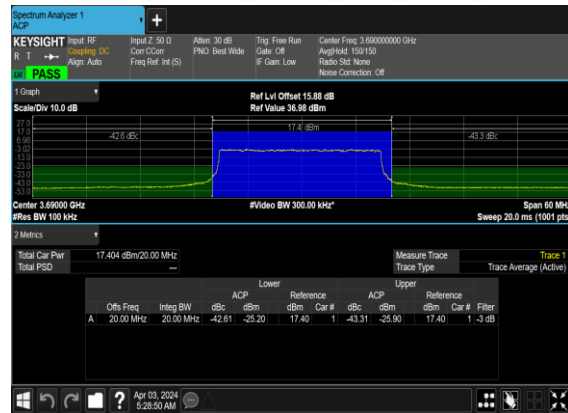

N48(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

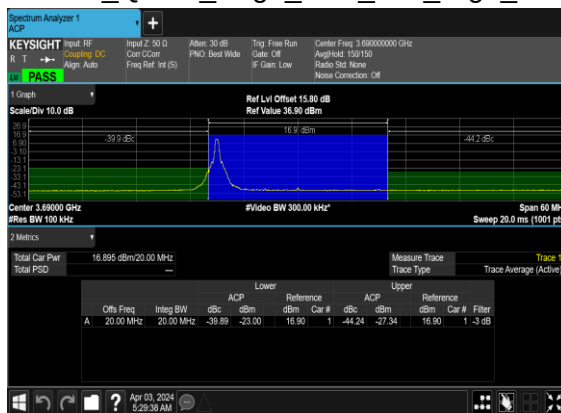

N48(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

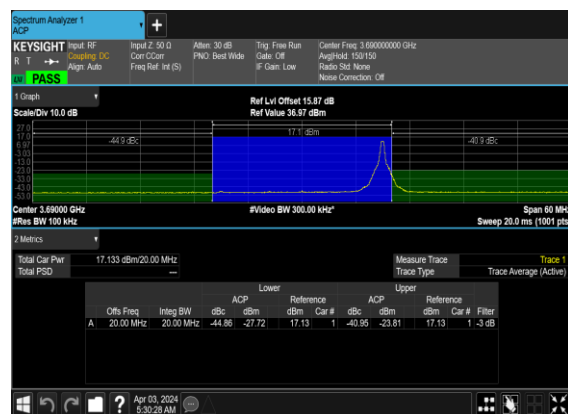

Spectrum Analyzer 1
ACP

KEYSIGHT Input: RF Input: 2.50 GHz
R T → → Core C-Cor
Align: Auto Freq Ref: Int (s)

Att: 30 dB P/N: Best Wide
Trig: Free Run Gate: Off
IF Gain: Low Noise Correction: Off

Center Freq: 3.56502000 GHz
Amp: 44.1501 dB
Ratio: Std None

1 Graph
Scale/Div: 10.0 dB
Ref Lvl Offset: 15.00 dB
Ref Value: 36.96 dBm

Center: 3.56502 GHz
#Res BW 100 kHz
Span: 90 MHz
Sweep: 27.2 ms (1001 pt)

2 Metrics
Total Car Pwr: 18.313 dBm/30.00 MHz
Total PSD: —

		Lower				Upper				
		ACP	Reference	ACP	Reference					
Offs Freq	Integ BW	dBc	dBm	dBm	Car #	dBc	dBm	dBm	Car #	
A	30.00 MHz	30.00 MHz	-43.48	-25.17	18.31	1	-43.97	-25.66	18.31	1 -3 dB

Measure Trace
Trace Type
Trace Average (Active)

Apr 03, 2004
8:31:38 AM

Spectrum Analyzer 1
ACP

KEYSIGHT Input: RF, Coupling: DC, Acp: Auto
R T →

Input Z: 50 Ω, Port C: C, Freq Ref: 1st (S)
Att: 30 dB, PNO: Best Wide, Trig: Free Run, Gate: Off, Filter: 3.56502000 GHz
Assigned: 151150, Ratio: Std None, Noise Correction: Off

1 Graph
Scale/Div: 10.0 dB

Ref Level Offset: 15.00 dB
Ref Value: 36.90 dBm

Span: 90 MHz
Sweep: 27.2 ms (1001 pts)

2 Metrics

Total Car Pair	18.571 dBm/30.00 MHz	Measure Trace Type	Trace Type	Trace Average (AC)
Total PSD	---			

Offs Freq	Integ BW	ACP		Reference		Upper		Reference		Filter	
		dBc	dBm	dBm	Car #	dBc	dBm	dBm	Car #		
A	30.00 MHz	30.00 MHz	-43.46	-24.89	18.57	1	-45.19	-26.62	18.57	1	-3 dB

Apr 03, 2024 3:32:29 AM

The screenshot displays the Keysight Spectrum Analyzer 1 ACP interface. The top panel shows the center frequency at 3.56502000 GHz and the resolution bandwidth (RBW) at 300 kHz. The main display area shows a signal trace with a prominent peak at 19.216 dBm/300 kHz. The trace is labeled with 'Ref Lvl Offset: 15.53 dB' and 'Ref Value: 36.93 dBm'. The bottom panel shows the measurement results, including the total power (19.216 dBm/300 kHz) and the total PSD (19.216 dBm/300 kHz).

Keysight Spectrum Analyzer 1 ACP

Input: RF
Output: DC
Align: Auto
Scale: Div 10.0 dB

Center Freq: 3.56502000 GHz
Ref Lvl Offset: 15.53 dB
Ref Value: 36.93 dBm

Span: 90 MHz
Sweep: 27.2 ms (1001 pts)

Measurements:

Offs Freq	Integ BW	dBc	dBm	Reference	ACP	Lower	Upper	Reference	Filter
30.00 MHz	30.00 MHz	-46.15	-26.94	19.22	1	-43.93	-24.71	19.22	1 -3 dB

Spectrum Analyzer 1
 ACP

KEYSIGHT Input RF
 R T → **Channeling DC**
 Align Auto

Input2 7.50 D
 Corr C-Corr
 Freq Ref (Hz)

Attm: 30 dB
 PNO: Best Wide

Trig: Free Run
 Gate: Off
 S: Gain Low

Center Freq: 3.56502000 GHz
 Assigned: 1011510
 Ratio: Std Noise
 Noise Correction: Off

OK PASS

1 Graph
 Scale/Div 10.0 dB

Ref Lvl Offset: 15.85 dBm
 Ref Value 36.95 dBm

Center 3.56502 GHz
 #Res BW 100 kHz

Span 60 MHz
 Sweep 27.2 ms 100 MHz

2 Metrics

Total Car Pair	17.815 dBm/30.00 MHz	Measure Trace	Trace Type	Trace Average (Aver)
Total PSD	---			

		ACP		Lower		Reference		ACP		Upper		Reference		Filter	
Offs Freq	Integ BW	dBc	dBm	dBm	Car #	dBc	dBm	dBm	Car #	dBc	dBm	dBm	Car #	dBc	Filter
A 30.00 MHz	30.00 MHz	-42.14	-24.33	17.82	1	-42.69	-24.67	17.82	1	-3	dB				

Apr 03, 2004
 3:34:15 AM

Spectrum Analyzer 1
ACP

KEYSIGHT Input RF
R T → Creating DC
Align Auto

Input Z: 50 Ω
Corr CCW
Freq Ref Int (S)

Att: 30 dB
PNO: Best Wide
IF Gain: Low

Center Freq: 3.55500000 GHz
Arg1/4d: 150/150
Stats Std: None
Noise Correction: Off

1 Graph
Scale/Div 10.0 dB

Ref Lvl Offset 15.62 dB
Ref Value 36.62 dBm

-42.5 dBc

18.7 dBm

-44.1 dBc

Center: 3.55500 GHz
Span: 50 MHz
BW: 100 MHz
Sweep: 27.2 ms (1001 pts)

2 Metrics

Total Car Power: 18.20 dBm/30.00 MHz
Total PSD: —

Lower				Upper			
Offs Freq	Integ BW	ACP	Reference	ACP	Reference	Filter	
dBc	dBm	dBm	Car #	dBm	dBm	Car #	
A 30.00 MHz	30.00 MHz	-42.48	-24.20	18.28	1	-44.86	-26.58
							18.28 1 -3 dB

Measure Trace
Trace Type
Trace Average (Active)

Apr 30, 2004
8:36:01 AM

Keysight Input RF: Coupling Auto Align Auto Att: 30 dB PNO: Bird Wide Trig: Free Run Gate: Off IF Gain: Low Center Freq: 3.5500000 GHz Amp/In: 150/150 Ratio: 80:1 Noise Correction: Off

1 Graph Scale/Div: 10.0 dB

Ref Lvl Offset: 15.87 dB
Ref Value: 58.97 dBm

Center: 3.55007 GHz
Span: 10 MHz
Sweep: 27.2 ms (1001 pts)

2 Metrics

Total Car Pwr: 16.25 dBm/30.00 MHz
Total PSD: ---

Lower				Upper			
Offs Freq	Integ BW	dBc	dBm	Reference	dBc	Reference	Filter
A 30.00 MHz	30.00 MHz	-43.17	-26.92	16.25	-41.19	-24.94	1 -3 dB

Spectrum Analyzer 1
 ACP

KEYSIGHT Input RF
 R T →→ Coupling DC
 Align Auto

Input Z: 50 Ω
 Corr CCW
 Freq Ref In (s)

Att: 30 dB
 PWR Best Wide

Trig Free Run
 Gate Off
 IF Gain: Low

Center Freq: 3.62490000 GHz
 Resolved: 1501 Hz
 Noise Correction: Off

1 Graph
 Scale/Div 10.0 dB
 Ref Lvl Offset: 15.00 dB
 Ref Value: 36.96 dBm

Center: 3.62499 GHz
 #Res BW 100 kHz
 Span 90 MHz
 Sweep 27.2 ms (1001 pt)

2 Metrics
 Total Car Pwr: 17.949 dBm/30.0 MHz
 Total PSD: —

		Lower				Upper				
		ACP	Reference	ACP	Reference					
Offs Freq	Integ BW	dBc	dBm	dBm	Car #	dBc	dBm	dBm	Car #	
A	30.00 MHz	30.00 MHz	-43.30	-25.36	17.95	1	-43.48	-25.53	17.95	1 -3 dB

Measure Trace
 Trace Type
 Trace Average (Active)

Apr 03, 2004
 8:37:16 AM

Spectrum Analyzer 1
ACP

KEYSIGHT Input: RF, Output: DC, Auto: Auto, Alarm: 30 dB, PNO: Best Wide, Trig: Free Run, Gate: Off, Center Freq: 3.62490000 GHz, Assigned: 150150, Ratio: Std None, Noise Correction: Off

1 Graph
Scale/Div: 10.0 dB

Ref Level Offset: 15.57 dB
Ref Value: 36.87 dBm

Center: 3.62490 GHz
Span: 90 MHz
RBW: 300.00 MHz
Sweep: 27.2 ms (1001 pts)

2 Metrics

Total	Car Pair	Trace Type	Trace Average (AC)
Total PSD	17.992 dBm/30.00 MHz		

Offs Freq	Integ BW	ACP	Lower	Reference	ACP	Upper	Reference	Filter			
		dBc	dBm	dBm	Car #	dBc	dBm	Car #			
A	30.00 MHz	30.00 MHz	-42.43	-24.43	17.99	1	-44.07	-26.08	17.99	1	-3 dB

Apr 03, 2004
5:38:12 AM

Spectrum Analyzer 1
ACP

KEYSIGHT Input RF
R T → →
Align Auto

Input Z: 50 Ω
Port CC: RF
Freq Ref: Int (S)

Att: 30 dB
PNO: Best Wide

Trig Pres: Run
Car: Off
IF Gain: Low

Center Freq: 3.62499000 GHz
Amp: 44.1301150
Ratio Set: None
Noise Correction: Off

1 Graph
Scale/Div 10.0 dB

Ref Lvl Offset: 15.57 dBm
Ref Value 36.97 dBm

Span 90 MHz
Sweep 27.2 ms (1001 pts)

#Video BW 300.00 kHz

2 Metrics

Total Car Power	17.237 dBm/30.00 MHz	Measure Trace	Trace Type	Trace Average (Ave)
Total PSD	---			

ACP Lower Reference				ACP Upper Reference			
Ols Freq	Integ BW	dBc	dBm	dBm	Car #	ACP	Reference
						dBm	Car #
30.00 MHz	30.00 MHz	-43.90	-26.67	17.24	1	-41.67	-24.43
				17.24	1	-3 dB	

Apr 03, 2024
8:39:01 AM

Spectrum Analyzer 1
ACP

KEYSIGHT Input RF: **Channeling DC**
 R T → Align: Auto
IN PASS

Input Z: 50 Ω
 Corr Coeff:
 Freq Ref: 10 (s)

Atten: 30 dB
 PNO: Best Wide

Trig: Free Run
 Gate: Off
 IF: Gain: Low

Center Freq: 3.62496000 GHz
 Assigned: 103150
 Ratio: Std: None
 Noise Correction: Off

Ref Lvl Offset: 15.00 dB
 Ref Value: 36.98 dBm

1 Graph
 Scale/Div: 10.0 dB

27.0
 17.0
 7.0
 -2.0
 -12.0
 -22.0
 -32.0
 -42.0

-42.2 (dB)

17.4 (dBm)

42.7 (dB)

Center 3.62499 GHz
 #Res BW 100 kHz

#Video BW 300.00 kHz

Span 60 MHz
 Sweep 27.2 ms (100% pts)

2 Metrics

Total Chr Pair: 17.448 dBm/30.00 MHz
 Total PSD: —

Measure Trace
 Trace Type:
 Trace Average (ACI):

Lower		Reference		Upper	
Offs Freq	Integ BW	dBc	dBm	dBc	dBm
A 30.00 MHz	30.00 MHz	-42.20	-24.75	17.45	-42.69
					-25.25
				17.45	-1.3 dB

The screenshot displays the Keysight Spectrum Analyzer 1 ACP interface. The main display shows a signal trace with a peak at 30.00 MHz. The trace is labeled with a frequency of 30.00 MHz and a power level of -41.89 dBm. The trace is also labeled with a frequency of 30.00 MHz and a power level of -41.89 dBm. The trace is labeled with a frequency of 30.00 MHz and a power level of -41.89 dBm.

Below the main display, there is a table of measurement data. The table has two main sections: 'Lower' and 'Upper'. The 'Lower' section shows measurements for the signal at 30.00 MHz, including the offset frequency, integrated bandwidth, and power levels in dBm. The 'Upper' section shows measurements for the signal at 30.00 MHz, including the offset frequency, integrated bandwidth, and power levels in dBm.

Lower		Reference		ACP		Upper		Reference		ACP	
Offs Freq	Integ BW	dBm	dBm	Car #	ACP	dBm	dBm	Car #	ACP	dBm	dBm
30.00 MHz	30.00 MHz	-41.89	-24.31	17.58	1	-43.65	-26.06	17.58	1	-43.65	-26.06

Spectrum Analyzer 1
ACP

KEYSIGHT Input RF: 3.62490000 GHz
 R 1 → Coupling DC: 150 dBm
 Apn: Auto: Ratio S&S: None
 Noise Correction: Off

1 Graph
 Scale/Div 10.0 dB

Ref Lvl Offset 15.81 dB
 Ref Value 36.91 dBm

Center 3.624900 GHz
 Span 10 MHz
 Res BW 100 kHz
 Sweep 27.2 ms (1001 pts)


2 Metrics

Total Car Pwr: 16.917 dBm/300 MHz
 Total PSD: —


Lower				Upper			
Offs Freq	Integ BW	dBc	dBm	Reference	dBm	dBc	Filter
A 30.00 MHz	30.00 MHz	-43.64	-26.72	16.92	-41.68	-24.76	1 -3 dB

Apr 10, 2024 14:32:40


N48(30M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_High_CH

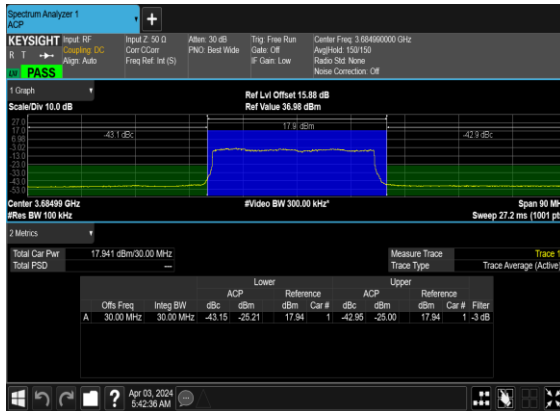


N48(30M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_High_CH

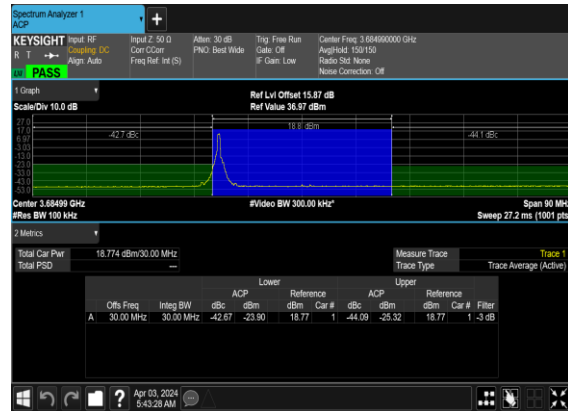


N48(30M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_High_CH

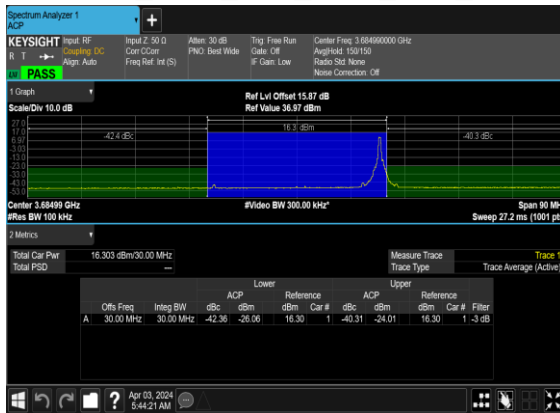


N48(30M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

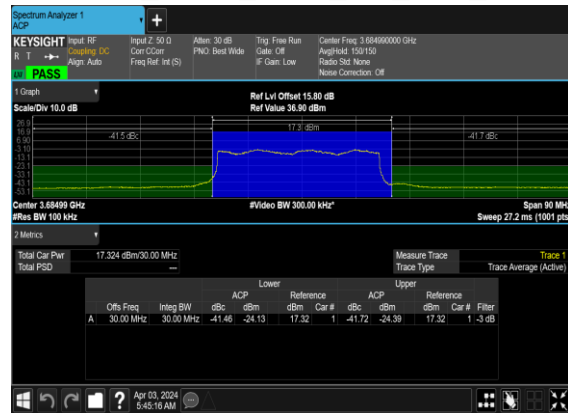

N48(30M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

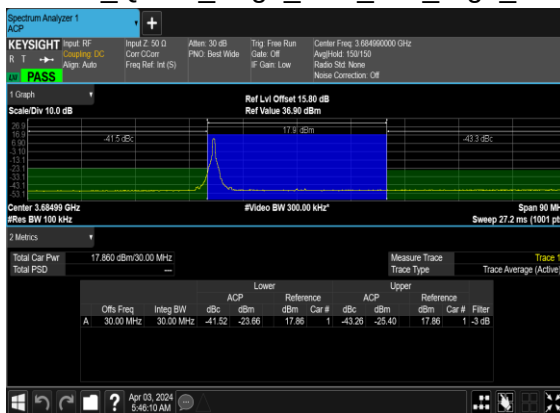

N48(30M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

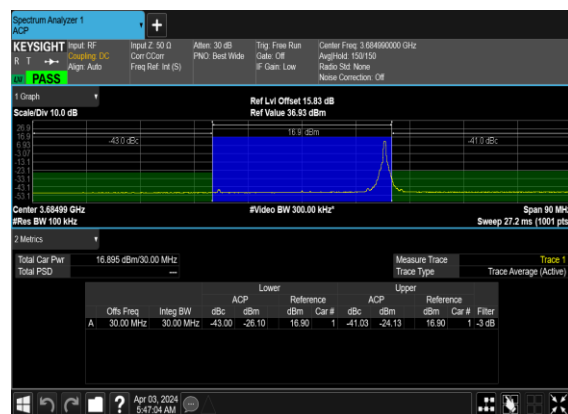

Spectrum Analyzer 1
ACP

KEYSIGHT Input RF
R T → →
Align Auto

Input Z: 50 Ω
Corr CCen
Freq Ref: 1st (s)

Att: 30 dB
P/N: 0 Best Wide

Trig Free Run
Gate: Off
IF Gain: Low

Center Freq: 3.57000000 GHz
Amp: 14.0 dBm
Res: 50 dB
Noise Correction: Off

Ref Lvl Offset: 15.08 dBm
Ref Value: 36.98 dBm

1 Graph
Scale/Div 10.0 dB

42.7 dBc
16.4 dBm
43.1 dBc

Center: 3.570000 GHz
#Res BW 100 kHz
#Video BW 300.00 kHz

Span 120 MHz
Sweep 36.3 ms (1001 pt)

2 Metrics

Total Car Pwr: 16.442 dBm/40.00 MHz
Total PSD: —

Measure Trace
Trace Type: Trace Average (Active)

Offs Freq	Integ BW	Lower				Upper				
		ACP	Reference	ACP	Reference					
		dBc	dBm	dBm	Car #	dBc	dBm	dBm	Car #	Filter
A	40.00 MHz	40.00 MHz	-42.72	-24.28	18.44	1	-43.09	-24.65	18.44	1 -3 dB

Apr 03, 2024
8:48:20 AM

Spectrum Analyzer 1
ACP

KEYSIGHT Input: RF, Output: DC, Acp: Auto, R: T, Freq: 19.321 GHz, Span: 120 MHz, Res: 3.0 kHz, Video BW: 300.00 MHz, Noise Floor: -140.0 dBm, Noise Correction: Off

Graph
Scale Div: 10.0 dB
Ref Level: 19.321 dBm
Ref Value: 36.87 dBm
Span: 120 MHz
Sweep: 36.3 ms (1001 pt)

Metrics

Total	Carrier	Power	ACP	Lower	Reference	ACP	Upper	Reference	Filter	
Offs Freq	Integ BW	dBc	dBm	dBm	Car #	dBc	dBm	dBm	Car #	
A	40.00 MHz	40.00 MHz	-42.60	-23.28	19.32	1	-44.49	-25.17	19.32	1 -3 dB

Spectrum Analyzer 1
 ACP

KEYSIGHT Input RF
 R T → Align Auto
 Input 2: 50 Ω
 Corr CCW
 Freq Ref Int (S)
 Att: 30 dB
 PNO Best Wide
 Trig Free Run
 Gate: Off
 Ref: Can Low
 Center Freq: 3.57000000 GHz
 ARefHz: 101150
 Ratio Set None
 Noise Correction Off

PASS

1 Graph
 Scale/Div 10.0 dB
 Ref Lvl Offset: 15.54 dB
 Ref Value 36.94 dBm

Center: 3.570000 GHz
 #Res BW 100 kHz
 #Video BW 300.00 kHz
 Span 120 MHz
 Sweep 36.3 ms (1001 pts)

2 Metrics

Total Car Power	17.991 dBm/40.00 MHz	Measure Trace	Trace Type	Trace Average (Ave)
Total PSD	-			

		Lower				Reference				Upper			
Offs Freq	Integ BW	dBc	dBm	dBm	Car #	dBc	dBm	dBm	Car #	Filter			
A 40.00 MHz	40.00 MHz	-43.72	-25.73	17.99	1	-41.61	-23.62	17.99	1	-3 dB			

Spectrum Analyzer 1
ACF

KEYSIGHT Input RF
R T → ←
Align Auto

Input Z: 50 Ω
Cort C: Off
Freq Ref: 1st (S)

Attn: 30 dB
PNO: Best Wld

Trig: Free Run
Gate: Off
F: Gain Low

Center Freq: 3.57000000 MHz
Assigned: 101150
Ratio: Std: None
Name Correction: Off

1 Graph
Scale/Div: 10.0 dB

27.0
17.0
7.0
-3.0
-13.0
-23.0
-33.0
-43.0
-53.0

-41.7 dBc
17.7 dBm
-42.2 dBc

Center 3.570000 MHz
#Res BW 100 kHz

#Video BW 300.00 kHz

Span 120 MHz
Sweep 36.3 ms (1000 pts)

2 Metrics

Total Cn: Pair
Total PSD

17.802 dBm/40.00 MHz
--

Measure Trace
Trace Type
Trace Average (AC)

Lower Reference
Upper Reference

Offs Freq	Integ BW	dBc	dBm	Reference	Car #	ACF	dBm	Reference	Car #	Filter
A 40.00 MHz	40.00 MHz	-41.72	-23.84	17.88	1	-42.24	-24.36	17.88	1	-3 dB

The screenshot displays the Keysight Spectrum Analyzer 1 ACP interface. The main display shows a signal trace with a peak at 18.837 dBm/40.00 MHz. The trace is labeled "Video BW 300.0 MHz". The scale is set to 10.0 dB. The center frequency is 3.57000000 GHz. The reference level is 15.67 dBm. The trace type is "Trace Average (Active)".

Below the main display, there is a table of measurement data:

		Lower				Upper			
		ACP	Reference	ACP	Reference	ACP	Reference	ACP	Reference
Offs Freq	Integ BW	dBc	dBm	dBm	Car #	dBc	dBm	dBm	Car #
A	40.00 MHz	-42.41	-23.57	18.84	1	-44.02	-25.18	18.84	1 -3 dB

Spectrum Analyzer 1
ACF

KEYSIGHT Input RF: 3.57000 GHz
R 1 → Coupling: Auto
Appl: Auto

Att: 30 dB
PNO: Best Wdth

Trig: Free Run
Gate: Off
IF: Gain Low

Center Freq: 3.57000000 GHz
Amp/IdB: 15.85 dB
Ratio S&B: None
Noise Correction: Off

1 Graph
Scale/Div: 10.0 dB

Ref Lvl Offset: 15.85 dB
Ref Value: 36.95 dBm

Center 3.57000 GHz
dBFS BW: 100 Hz

Video BW: 300.0 kHz

Span: 120 MHz
Sweep: 36.3 ms (1001 pts)

2 Metrics


Total Car Pwr: 18.092 dBm/40.00 MHz
Total PSD: —

Measure Trace: Trace 1
Trace Type: Trace Average (Active)


Lower				Upper			
Offs Freq	Integ BW	ACP	Reference	ACP	Reference	Car #	Filter
dBc	dBm	dBm	dBm	dBm	dBm		
A 40.00 MHz	40.00 MHz	-43.82	-25.73	18.09	-41.79	-23.70	1 -3 dB

Apr 18, 2024
5:52:36 AM


N48(40M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

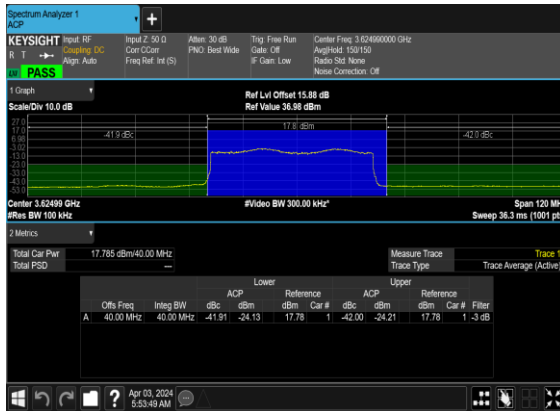


N48(40M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

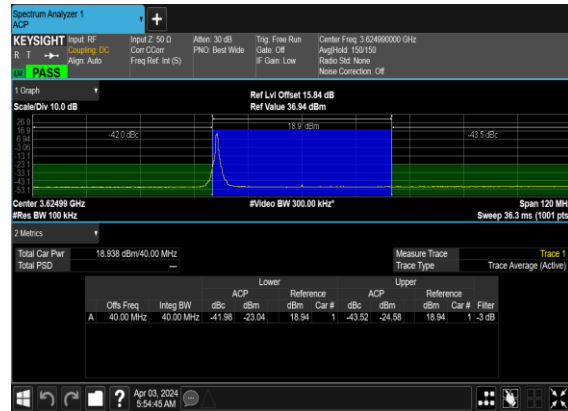


N48(40M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_Mid_CH

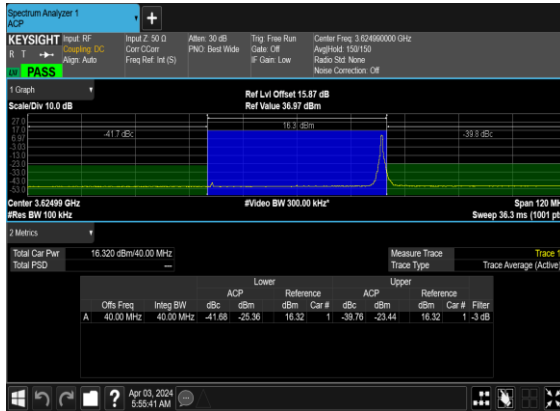


N48(40M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

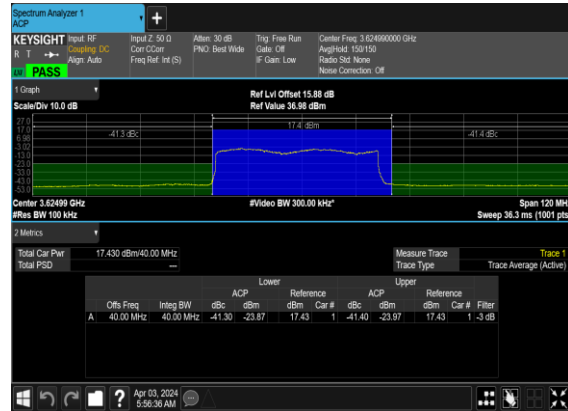


N48(40M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

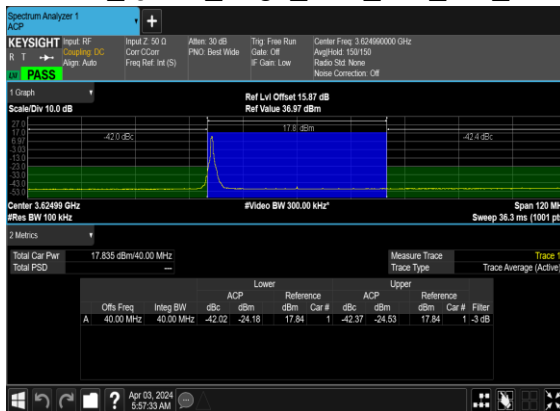


N48(40M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Mid_CH

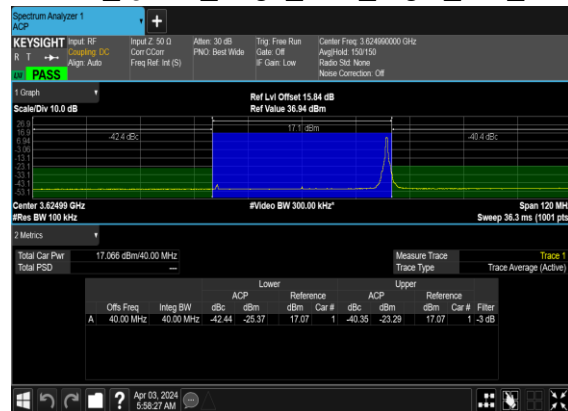

N48(40M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_High_CH

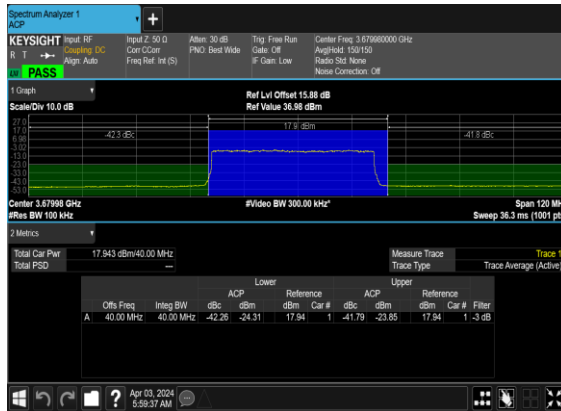


N48(40M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_High_CH

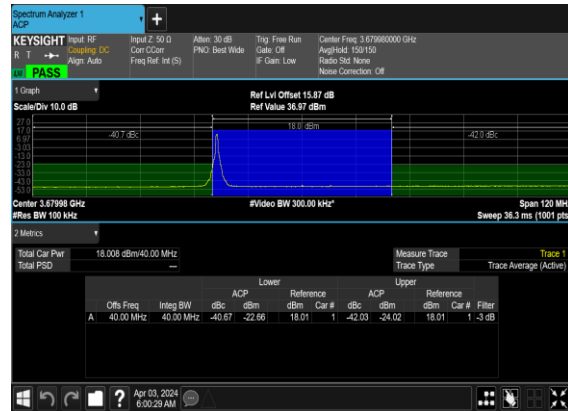


N48(40M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_High_CH




N48(40M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

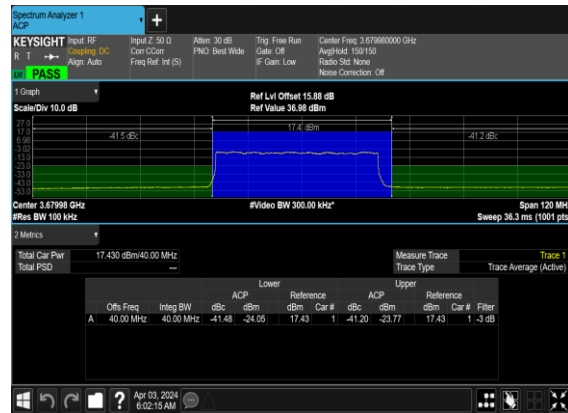

N48(40M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

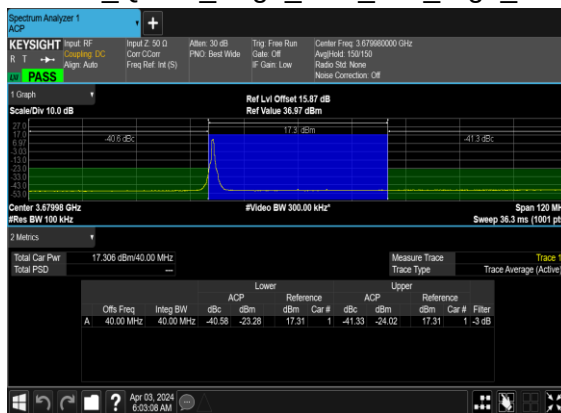

N48(40M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

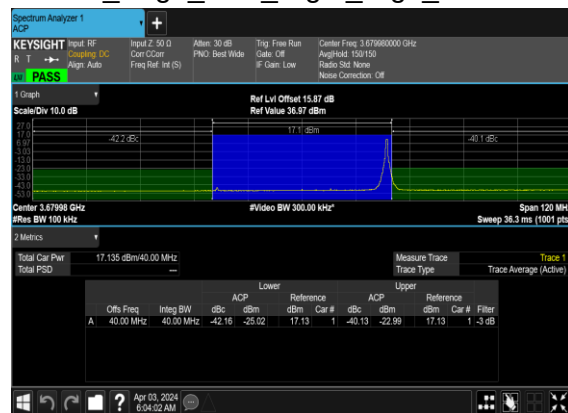


Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	30	637668	3565.02	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	30	637668	3565.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	30	637668	3565.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	30	637668	3565.02	DFT-s-OFDM QPSK	1@0	see graph	---

48	30	30	637668	3565.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	30	637668	3565.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	30	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	30	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	30	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	30	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	30	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	30	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	30	645666	3684.99	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	30	645666	3684.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	30	645666	3684.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	30	645666	3684.99	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	30	645666	3684.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	30	645666	3684.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	---

48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	see graph	PASS


N48(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

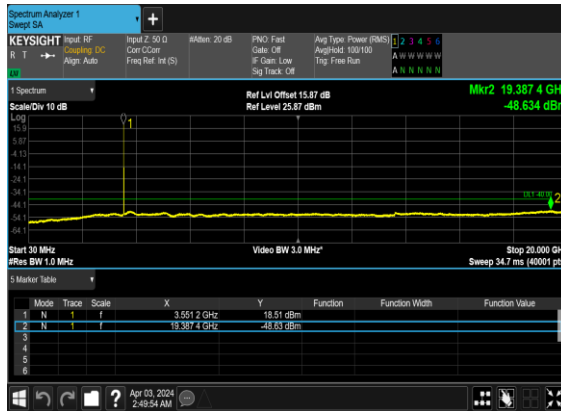

N48(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH




N48(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

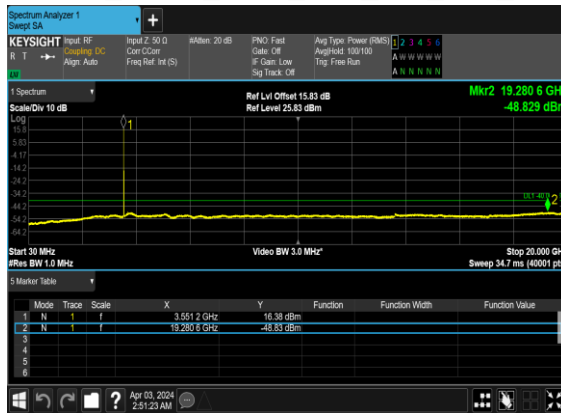


N48(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH




N48(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

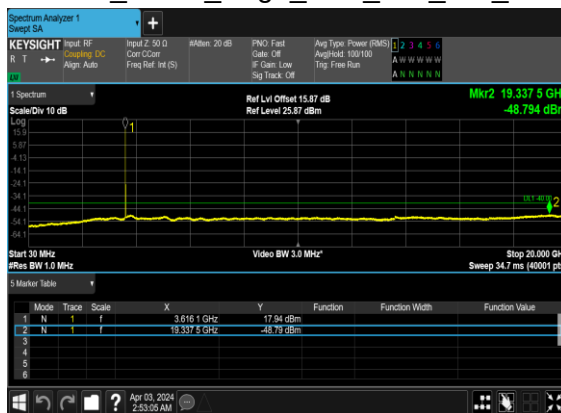

N48(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

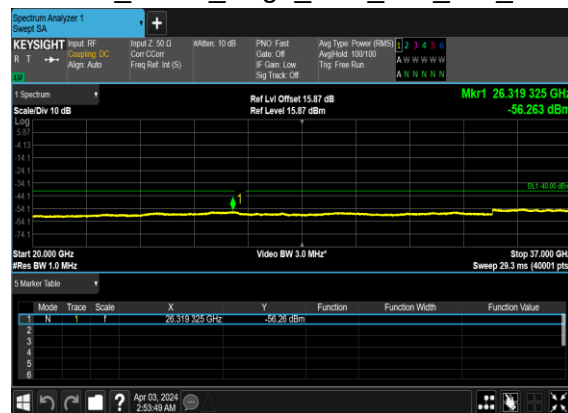


N48(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

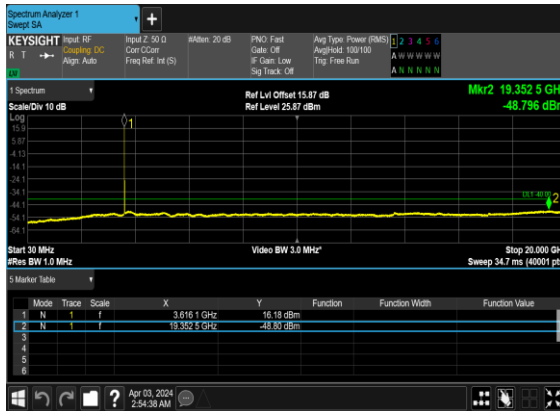


N48(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH




N48(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

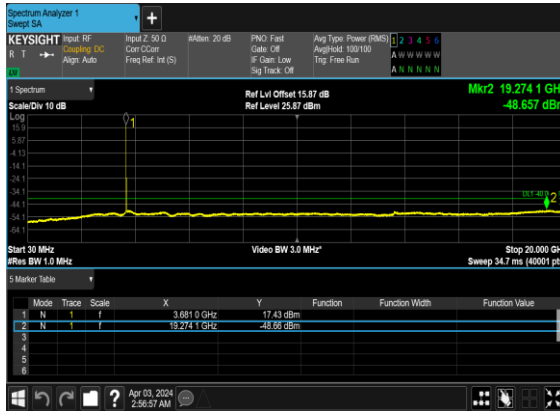


N48(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

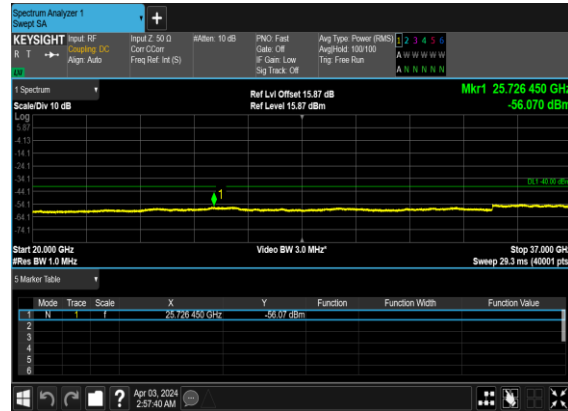

N48(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

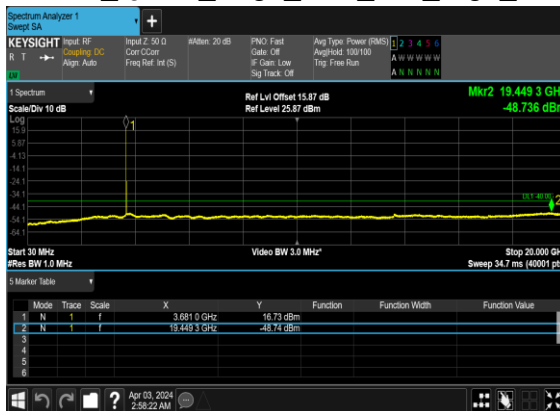

N48(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

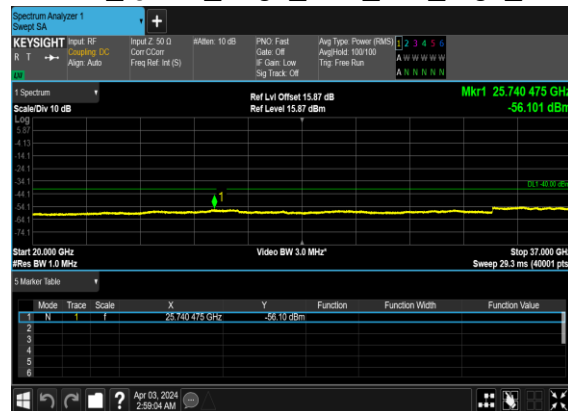


N48(30M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH




N48(30M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH




N48(30M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

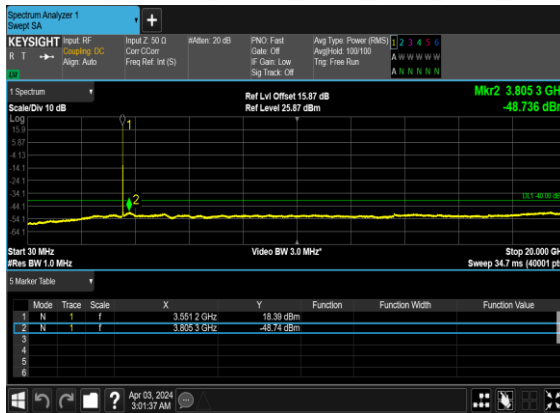


N48(30M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

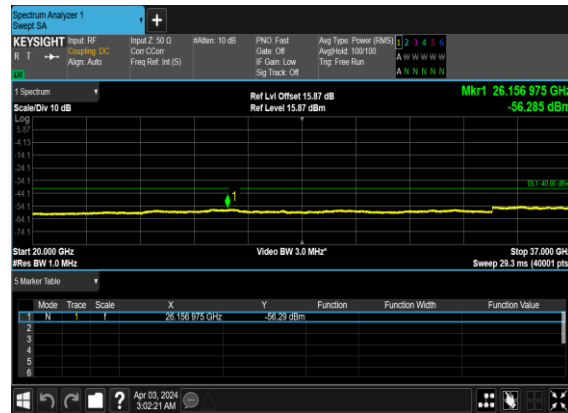


N48(30M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

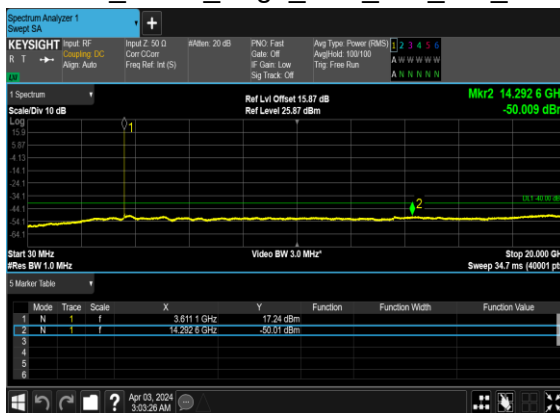

N48(30M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

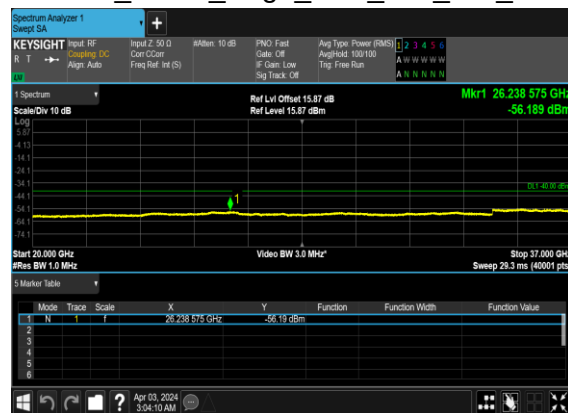


N48(30M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

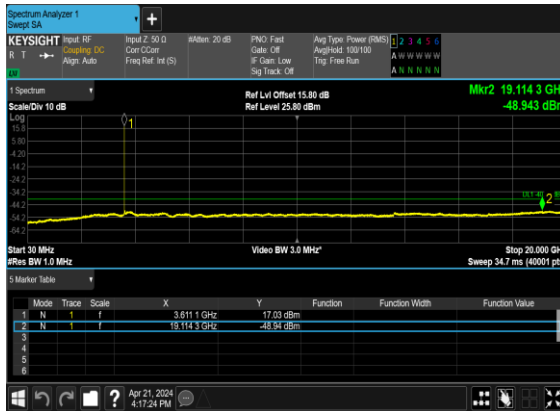


N48(30M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH




N48(30M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH

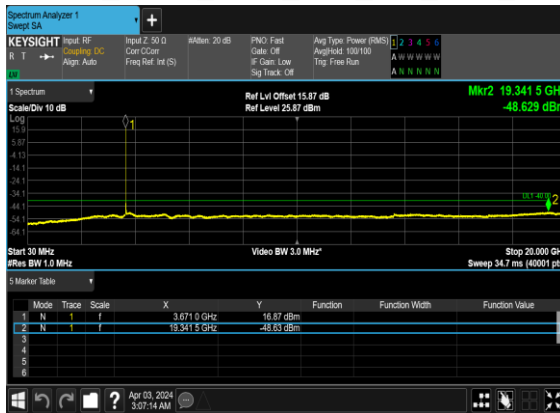

N48(30M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH

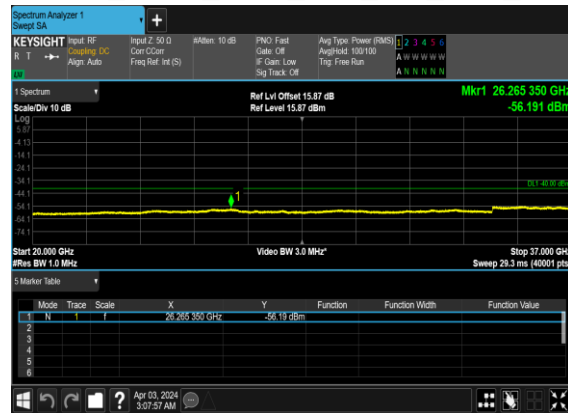

N48(30M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH

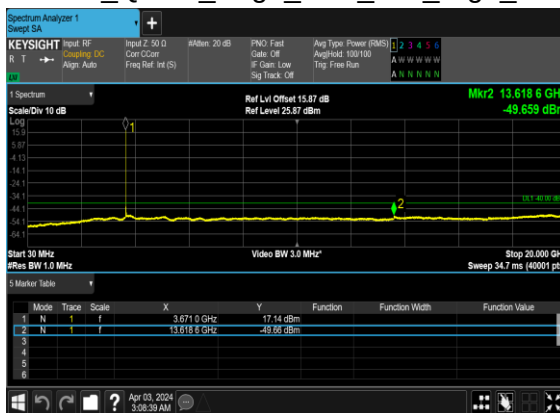

N48(30M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH

