



# TEST REPORT

## FCC ID:2AE6W-GCW1303D

**Product:** Indoor Camera (Plug-In, 1080p)  
**Model Name:** G-CW1303D, HD-CW1303D, CW1303D  
**Brand:** N/A  
**Report No.:** NCT26028229XE1-5

Prepared for

**Shenzhen Omimo Technology Co., Ltd.**

**Room 1104,Building 6,No.136 Zhongkang Road,Meidu Community,Meilin  
Subdistrict,Futian District,Shenzhen,Guangdong P.R.China**

Prepared by

**Shenzhen NCT Testing Technology Co., Ltd.**

**A101,B2,Fuqiao 6th Area ,xintian Community,Fuhai Street,Baoan  
District,Shenzhen,China**

**TEL: 400-8868-419**

**1 TEST RESULT CERTIFICATION**

Applicant's name : Shenzhen Omimo Technology Co., Ltd.

Address : Room 1104, Building 6, No.136 Zhongkang Road, Meidu Community, Meilin Subdistrict, Futian District, Shenzhen, Guangdong P.R.China

Manufacture's name : SHARETRONIC DATA TECHNOLOGY (THAILAND) Co., Ltd.

Address : 88/1 No. 3, Nong Heing, Phanatnikom, Chonburi THAILAND 20140

Product name : Indoor Camera (Plug-In, 1080p)

Model name : G-CW1303D, HD-CW1303D, CW1303D

Standards : FCC PART 15 C 15.407  
ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024  
KDB 789033 D02 v01r02  
KDB 905462 D03 v01r02

Test procedure : ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024

Test Date : Jul. 06, 2026 ~ Sep. 14, 2026

Date of Issue : Sep. 14, 2026

Test Result : Pass

This device described above has been tested by NCT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NCT, this document may be altered or revised by NCT, personal only, and shall be noted in the revision of the document.

Prepared by:

Shine Wu

Shine Wu

Reviewer:

Keven Wu

Keven Wu

Approved:

Henry Wang

Henry Wang

**Contents**

|                                                | <b>Page</b> |
|------------------------------------------------|-------------|
| <b>1 TEST RESULT CERTIFICATION .....</b>       | <b>2</b>    |
| <b>2 TEST SUMMARY .....</b>                    | <b>4</b>    |
| <b>3 TEST FACILITY .....</b>                   | <b>5</b>    |
| <b>4 GENERAL INFORMATION .....</b>             | <b>6</b>    |
| 4.1 GENERAL DESCRIPTION OF E.U.T. ....         | 6           |
| 4.2 TEST SETUP CONFIGURATION .....             | 10          |
| 4.3 TEST MODE .....                            | 11          |
| 4.4 EQUIPMENT UNDER TEST (EUT) DETAILS .....   | 11          |
| <b>5 EQUIPMENT DURING TEST .....</b>           | <b>12</b>   |
| 5.1 EQUIPMENTS LIST .....                      | 12          |
| 5.2 MEASUREMENT UNCERTAINTY .....              | 13          |
| 5.3 DESCRIPTION OF SUPPORT UNITS .....         | 13          |
| <b>6 DFS MEASUREMENT INSTRUMENTATION .....</b> | <b>14</b>   |
| <b>7 DFS PARAMETERS .....</b>                  | <b>16</b>   |
| 7.1 DFS PARAMETERS .....                       | 16          |
| 7.2 DFS -TEST RESULTS .....                    | 21          |
| 7.3 DFS TEST DATA .....                        | 23          |
| <b>8 TEST SETUP &amp; EUT PHOTOGRAPH .....</b> | <b>33</b>   |
| <b>9 EUT PHOTOGRAPH .....</b>                  | <b>34</b>   |

## 2 Test Summary

Test procedures according to the technical standards: KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 and 905462 D03 UNII Clients Without Radar Detection New Rules v01r02

| Part 15.407                       |                  |              |              |
|-----------------------------------|------------------|--------------|--------------|
| Requirement                       | Operational Mode |              | RESULTS      |
|                                   | Master           | Client       |              |
| DFS Detection Threshold           | Yes              | Not required | Not required |
| Channel Availability Check Time   | Yes              | Not required | Not required |
| Channel Closing Transmission Time | Yes              | Yes          | Pass         |
| Channel Move Time                 | Yes              | Yes          | Pass         |
| U-NII Detection Bandwidth         | Yes              | Not required | Not required |

Remark: Operational Mode is Client for this module.

## 3 TEST FACILITY

### Site Description

EMC Lab. : Accredited by CNAS

The Certificate Registration Number is L8251

Designation Number: CN1347

Test Firm Registration Number: 894804

Accredited by A2LA

The Certificate Registration Number is 6837.01

Accredited by Industry Canada

The Conformity Assessment Body Identifier is CN0150

Company Number:30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.

Site Location : A101,B2,Fuqiao 6th Area ,xintian Community,Fuhai Street,Baoan District,Shenzhen,China

## 4 General Information

### 4.1 General Description of E.U.T.

|                                |                                                                                                                                                                                                        |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name:                  | Indoor Camera (Plug-In, 1080p)                                                                                                                                                                         |
| Model No.:                     | G-CW1303D                                                                                                                                                                                              |
| Sample ID:                     | NCT26028229X-001                                                                                                                                                                                       |
| Sample(s) Status:              | Engineer sample                                                                                                                                                                                        |
| Series model:                  | HD-CW1303D, CW1303D                                                                                                                                                                                    |
| Model Different:               | All models are the same except for the model name and color.                                                                                                                                           |
| Operation Frequency Range:     | U-NII Band 2A: 5.26~5.32 GHz<br>U-NII Band 2C: 5.50~5.70 GHz                                                                                                                                           |
| Frequency Block                | U-NII Band 2A: 5.25~5.35 GHz<br>U-NII Band 2C: 5.47~5.725 GHz                                                                                                                                          |
| Modulation type:               | OFDM with BPSK/QPSK/16QAM/64QAM for 802.11a/n<br>OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11ac                                                                                                   |
| Antenna Type:                  | FPC Antenna                                                                                                                                                                                            |
| Channel Bandwidth              | 802.11a: 20 MHz<br>802.11n: 20 MHz, 40 MHz<br>802.11ac: 20 MHz, 40 MHz, 80 MHz                                                                                                                         |
| TPC:                           | <input checked="" type="checkbox"/> Supported <input type="checkbox"/> Unsupported                                                                                                                     |
| Channel Puncturing Function:   | <input type="checkbox"/> Supported <input checked="" type="checkbox"/> Unsupported                                                                                                                     |
| Slave without radar detection: | <input checked="" type="checkbox"/> Supported <input type="checkbox"/> Unsupported                                                                                                                     |
| Support RU:                    | <input checked="" type="checkbox"/> Full RU <input type="checkbox"/> Partial RU                                                                                                                        |
| Antenna gain:                  | Wifi 5G:1.91 dBi                                                                                                                                                                                       |
| Power supply:                  | DC 5V from adapter input AC120V60Hz                                                                                                                                                                    |
| Adapter information:           | Model Number: CS-0502000<br>INPUT:100-240V~50/60Hz 0.5A<br>OUTPUT:5V=2.0A                                                                                                                              |
| Hardware Version:              | V1.0                                                                                                                                                                                                   |
| Software Version:              | V1.0                                                                                                                                                                                                   |
| Remark:                        | the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant. |

☒ Wifi 5G with U-NII -2A

Frequency and Channel list for 802.11a/n (HT20)/802.11ac (VHT20):

| Channel | Frequency<br>(MHz) | Channel | Frequency<br>(MHz) | Channel | Frequency<br>(MHz) |
|---------|--------------------|---------|--------------------|---------|--------------------|
| 52      | 5260               | 60      | 5300               |         |                    |
| 56      | 5280               | 64      | 5320               |         |                    |

Frequency and Channel list for 802.11n (HT40)/ 802.11ac (VHT40):

| Channel | Frequency<br>(MHz) | Channel | Frequency<br>(MHz) | Channel | Frequency<br>(MHz) |
|---------|--------------------|---------|--------------------|---------|--------------------|
| 54      | 5270               |         |                    |         |                    |
| 62      | 5310               |         |                    |         |                    |

**Test** Frequency and Channel for 802.11a/n (HT20)/802.11ac (VHT20):

| Lowest Frequency |                    | Middle Frequency |                    | Highest Frequency |                    |
|------------------|--------------------|------------------|--------------------|-------------------|--------------------|
| Channel          | Frequency<br>(MHz) | Channel          | Frequency<br>(MHz) | Channel           | Frequency<br>(MHz) |
| 52               | 5260               | 60               | 5300               | 64                | 5320               |

**Test** Frequency and channel for 802.11n (HT40)/ 802.11ac (VHT40):

| Lowest Frequency |                    | Middle Frequency |                    | Highest Frequency |                    |
|------------------|--------------------|------------------|--------------------|-------------------|--------------------|
| Channel          | Frequency<br>(MHz) | Channel          | Frequency<br>(MHz) | Channel           | Frequency<br>(MHz) |
| 54               | 5270               | N/A              | N/A                | 62                | 5310               |

**TTTest** Frequency and Channel for 802.11ac (VHT80):

| Lowest Frequency |                    | Middle Frequency |                    | Highest Frequency |                    |
|------------------|--------------------|------------------|--------------------|-------------------|--------------------|
| Channel          | Frequency<br>(MHz) | Channel          | Frequency<br>(MHz) | Channel           | Frequency<br>(MHz) |
| 58               | 5290               |                  |                    |                   |                    |

☒ Wifi 5G with U-NII -2C

Frequency and Channel list for 802.11a/n (HT20)/802.11ac (VHT20):

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|
| 100     | 5500            | 116     | 5580            | 132     | 5660            |
| 104     | 5520            | 120     | 5600            | 136     | 5680            |
| 108     | 5540            | 124     | 5620            | 140     | 5700            |
| 112     | 5560            | 128     | 5640            |         |                 |

Frequency and Channel list for 802.11n (HT40)/ 802.11ac (VHT40):

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|
| 102     | 5510            | 118     | 5590            | 134     | 5670            |
| 110     | 5550            | 126     | 5630            |         |                 |

**Test** Frequency and Channel for 802.11a/n (HT20)/802.11ac (VHT20):

| Lowest Frequency |                 | Middle Frequency |                 | Highest Frequency |                 |
|------------------|-----------------|------------------|-----------------|-------------------|-----------------|
| Channel          | Frequency (MHz) | Channel          | Frequency (MHz) | Channel           | Frequency (MHz) |
| 100              | 5500            | 120              | 5600            | 140               | 5700            |

**Test** Frequency and channel for 802.11n (HT40)/ 802.11ac (VHT40):

| Lowest Frequency |                 | Middle Frequency |                 | Highest Frequency |                 |
|------------------|-----------------|------------------|-----------------|-------------------|-----------------|
| Channel          | Frequency (MHz) | Channel          | Frequency (MHz) | Channel           | Frequency (MHz) |
| 102              | 5510            | 118              | 5590            | 134               | 5670            |

**Test** Frequency and Channel for 802.11ac (VHT80):

| Lowest Frequency |                 | Middle Frequency |                 | Highest Frequency |  |
|------------------|-----------------|------------------|-----------------|-------------------|--|
| Channel          | Frequency (MHz) | Channel          | Frequency (MHz) |                   |  |

|     |      |     |      |  |  |
|-----|------|-----|------|--|--|
| 106 | 5530 | 122 | 5610 |  |  |
|-----|------|-----|------|--|--|


Note: 1. The EUT not support TPC function, Radar detection and hotspot.

2. The master device fixed the test mode and working channel on the background management page, the client device is connected to the wireless network sent by the master device, it takes 120 seconds for the master device to fully boot up, and 8.0 seconds for the client device.




## 4.2 Test Setup Configuration

Setup for Master with injection at the Master

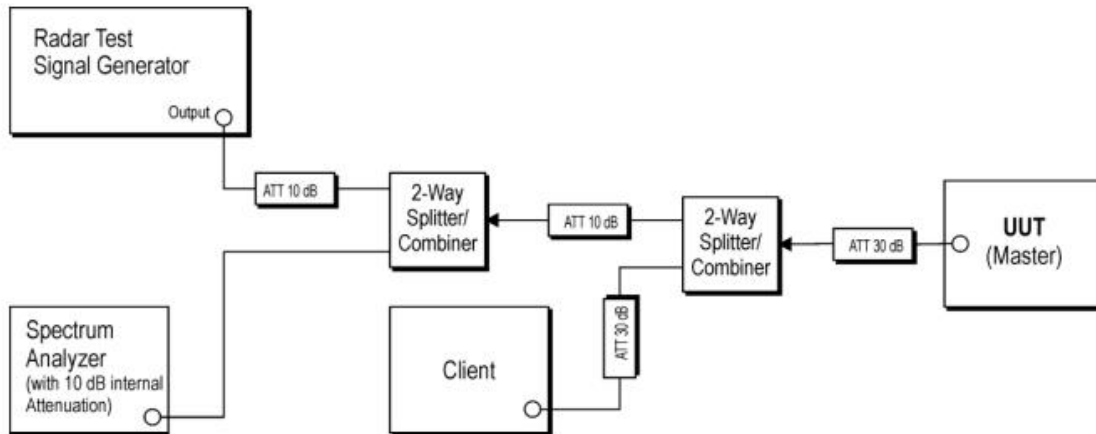

**Figure 2: Example Conducted Setup where UUT is a Master and Radar Test Waveforms are injected into the Master**

Setup for Client with injection at the Master

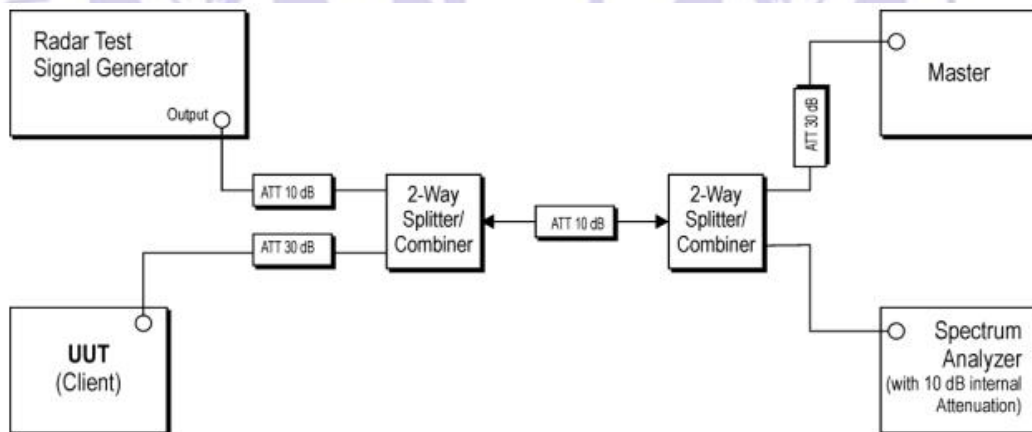

**Figure 3: Example Conducted Setup where UUT is a Client and Radar Test Waveforms are injected into the Master**

## 4.3 Test Mode

|                                                                                                                                                                                                                                       |                                                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| Transmitting mode                                                                                                                                                                                                                     | Keep the EUT in continuously transmitting mode. |
| Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data. |                                                 |

|                   |                       |
|-------------------|-----------------------|
| Test Software     | Aic rf test_2024_0509 |
| Power level setup | 2 dBm                 |

## 4.4 EQUIPMENT UNDER TEST (EUT) DETAILS

The manufacturer declared values for the EUT operational characteristics that affect DFS are as follows

### Operating Modes (5260 - 5320 MHz, 5470-5725)

- ☐ Master Device  
☒ Client Device (no In Service Monitoring, no Ad-Hoc mode)  
☐ Client Device with In-Service Monitoring

### Antenna Gains / EIRP (5260 - 5320 MHz, 5470-5725)

|                               | 5260 - 5320 MHz | 5470-5725MHz |
|-------------------------------|-----------------|--------------|
| Lowest Antenna Gain (dBi)     | 5.24            | 4.98         |
| Highest Antenna Gain (dBi)    | 5.24            | 4.98         |
| DFS Detection Threshold (dBm) | -64             |              |

### Channel Protocol

- ☒ IP Based  
☐ Frame Based  
☐ OTHER

The EUT did not require modifications during testing in order to comply with the requirements of the standard(s) referenced in this test report.

## 5 Equipment During Test

### 5.1 Equipments List

| Name                        | Model No. | Serial No. | Manufacturer    | Date of Cal. | Due Date  | Equipment State |
|-----------------------------|-----------|------------|-----------------|--------------|-----------|-----------------|
| MXG Signal Analyzer         | N9020A    | MY50510202 | Agilent         | 2026/6/05    | 2027/6/04 | Normal          |
| MXG Vector Signal Generator | N5182A    | MY50140020 | Agilent         | 2026/6/05    | 2027/6/04 | Normal          |
| MXG Analog Signal Generator | N5181A    | MY47420919 | Agilent         | 2026/6/05    | 2027/6/04 | Normal          |
| Power Sensor                | TR1029-2  | 512364     | Techoy          | 2026/6/05    | 2027/6/04 | Normal          |
| RF Switch                   | TR1029-1  | 512364     | Techoy          | 2026/6/05    | 2027/6/04 | Normal          |
| MXG Signal Analyzer         | N9020A    | MY50510202 | Agilent         | 2026/6/05    | 2027/6/04 | Normal          |
| Attenuator                  | eastsheep | 90db       | N/A             | 2026/6/05    | 2027/6/04 | Normal          |
| Radio Communication Tester  | CWM500    | 104995     | Rohde & Schwarz | 2026/6/05    | 2027/6/04 | Normal          |

Other

| Item | Name                         | Manufacturer | Model  | Software version |
|------|------------------------------|--------------|--------|------------------|
| 1    | RF test system               | TACHOY       | RFTest | V1.0.0           |
| 2    | RF communication test system | TACHOY       | RFTest | V1.0.0           |

## 5.2 Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

| No. | Item                      | Uncertainty               |
|-----|---------------------------|---------------------------|
| 1   | DFS Threshold (radiated)  | $\pm 1.50\text{dB}$       |
| 2   | DFS Threshold (conducted) | $\pm 1.45\text{dB}$       |
| 3   | Temperature               | $\pm 0.5^{\circ}\text{C}$ |
| 4   | Humidity                  | $\pm 2\%$                 |

## 5.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment                      | Mfr/Brand | Model/Type No. | Series No.                | Note      |
|------|--------------------------------|-----------|----------------|---------------------------|-----------|
| E-1  | Indoor Camera (Plug-In, 1080p) | N/A       | G-CW1303D      | N/A                       | EUT       |
| E-2  | Adapter                        | N/A       | CS-0502000     | N/A                       | Auxiliary |
| E-3  | Router                         | TP-LINK   | TL-WR885N      | FCC ID:<br>Q87-WRT3200ACM | Auxiliary |
| E-4  | Notebook                       | /         | X1502Z         | N/A                       | Auxiliary |

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## **6 DFS MEASUREMENT INSTRUMENTATION**

### **DFS MEASUREMENT INSTRUMENTATION**

#### **a. RADAR GENERATION SYSTEM**

An Agilent PSG is used as the radar-generating source. The integral arbitrary waveform generators are programmed using Agilent's "Pulse Building" software and Elliott custom software to produce the

required waveforms, with the capability to produce both unmodulated and modulated (FM Chirp) pulses. Where there are multiple values for a specific radar parameter then the software selects a value at

random and, for FCC tests, the software verifies that the resulting waveform is truly unique.

With the exception of the hopping waveforms required by the FCC's rules (see below), the radar generator is set to a single frequency within the radar detection bandwidth of the EUT.

Frequency hopping radar waveforms are simulated using a time domain model. A randomly hopping sequence algorithm (which uses each channel in the hopping radar's range once in a hopping

sequence) generates a hop sequence. A segment of the first 100 elements of the hop sequence are

then examined to determine if it contains one or more frequencies within the radar detection bandwidth of the EUT. If it does not then the first element of the segment is discarded and the next frequency in the sequence is added. The process repeats until a valid segment is produced. The radar system is then

programmed to produce bursts at timeslots coincident with the frequencies within the segment that fall

in the detection bandwidth. The frequency of the generator is stepped in 1 MHz increments across the EUT's detection range.

The radar signal level is verified during testing using a CW signal with the AGC function switched on.

Correction factors to account for the fact that pulses are generated with the AGC functions switched off are measured annually and an offset is used to account for this in the software. The generator output is connected to the coupling port of the conducted set-up or to the radar-generating antenna.

#### **b. CHANNEL MONITORING SYSTEM**

Channel monitoring is achieved using a spectrum analyzer and digital storage oscilloscope. The

analyzer is configured in a zero-span mode, center frequency set to the radar waveform's frequency or the center frequency of the EUT's operating channel.

The IF output of the analyzer is connected to one input of the oscilloscope and analyzer.

A signal generator output is set to send either the modulating signal directly or a pulse gate with an

output pulse co-incident with each radar pulse. This output is connected to a second input on the

oscilloscope and the oscilloscope displays both the channel traffic (via the if input) and the radar pulses on its display.

For in service monitoring tests the analyzer sweep time is set to > 20 seconds and the oscilloscope is

configured with a data record length of 10 seconds for the short duration and frequency hopping

waveforms, 20 seconds for the long duration waveforms. Both instruments are set for a single

acquisition sequence. The analyzer is triggered 500ms before the start of the waveform and the

oscilloscope is triggered directly by the modulating pulse train. Timing measurements for aggregate

channel transmission time and channel move time are made from the oscilloscope data, with the end of the waveform clearly identified by the pulse train on one trace. The analyzer trace data is used to

confirm that the last transmission occurred within the 10-second record of the oscilloscope. If necessary the record length of the oscilloscope is expanded to capture the last transmission on the channel prior to the channel move.

Channel availability check time timing plots are made using the analyzer. The analyzer is triggered at start of the EUT's channel availability check and used to verify that the EUT does not transmit when radar is applied during the check time.

The analyzer detector and oscilloscope sampling mode is set to peak detect for all plots.



## 7 DFS PARAMETERS

### 7.1 DFS PARAMETERS

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

| Requirement                            | Operational Mode |                                |                             |
|----------------------------------------|------------------|--------------------------------|-----------------------------|
|                                        | Master           | Client Without Radar Detection | Client With Radar Detection |
| <i>Non-Occupancy Period</i>            | Yes              | Not required                   | Yes                         |
| <i>DFS Detection Threshold</i>         | Yes              | Not required                   | Yes                         |
| <i>Channel Availability Check Time</i> | Yes              | Not required                   | Not required                |
| <i>U-NII Detection Bandwidth</i>       | Yes              | Not required                   | Yes                         |

Table 2: Applicability of DFS requirements during normal operation

| Requirement                                                                                                                                                                                                                                                                                                                                                  | Operational Mode                                    |                                                      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|------------------------------------------------------|
|                                                                                                                                                                                                                                                                                                                                                              | Master Device or Client with Radar Detection        | Client Without Radar Detection                       |
| <i>DFS Detection Threshold</i>                                                                                                                                                                                                                                                                                                                               | Yes                                                 | Not required                                         |
| <i>Channel Closing Transmission Time</i>                                                                                                                                                                                                                                                                                                                     | Yes                                                 | Yes                                                  |
| <i>Channel Move Time</i>                                                                                                                                                                                                                                                                                                                                     | Yes                                                 | Yes                                                  |
| <i>U-NII Detection Bandwidth</i>                                                                                                                                                                                                                                                                                                                             | Yes                                                 | Not required                                         |
| <b>Additional requirements for devices with multiple bandwidth modes</b>                                                                                                                                                                                                                                                                                     | <b>Master Device or Client with Radar Detection</b> | <b>Client Without Radar Detection</b>                |
| <i>U-NII Detection Bandwidth and Statistical Performance Check</i>                                                                                                                                                                                                                                                                                           | All BW modes must be tested                         | Not required                                         |
| <i>Channel Move Time and Channel Closing Transmission Time</i>                                                                                                                                                                                                                                                                                               | Test using widest BW mode available                 | Test using the widest BW mode available for the link |
| <i>All other tests</i>                                                                                                                                                                                                                                                                                                                                       | Any single BW mode                                  | Not required                                         |
| <b>Note:</b> Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency. |                                                     |                                                      |

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

| Maximum Transmit Power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Value<br>(See Notes 1, 2, and 3) |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| EIRP $\geq$ 200 milliwatt                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | -64 dBm                          |
| EIRP < 200 milliwatt and<br>power spectral density < 10 dBm/MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | -62 dBm                          |
| EIRP < 200 milliwatt that do not meet the power spectral<br>density requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                             | -64 dBm                          |
| <p><b>Note 1:</b> This is the level at the input of the receiver assuming a 0 dBi receive antenna.</p> <p><b>Note 2:</b> Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p><b>Note3:</b> EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.</p> |                                  |

Table 4: DFS Response Requirement Values

| Parameter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Value                                                                                                                 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <i>Non-occupancy period</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Minimum 30 minutes                                                                                                    |
| <i>Channel Availability Check Time</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 60 seconds                                                                                                            |
| <i>Channel Move Time</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 10 seconds<br>See Note 1.                                                                                             |
| <i>Channel Closing Transmission Time</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 200 milliseconds + an<br>aggregate of 60<br>milliseconds over<br>remaining 10 second<br>period.<br>See Notes 1 and 2. |
| <i>U-NII Detection Bandwidth</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Minimum 100% of the U-<br>NII 99% transmission<br>power bandwidth. See<br>Note 3.                                     |
| <p><b>Note 1:</b> <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.</p> <p><b>Note 2:</b> The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel move</i> (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p> <p><b>Note 3:</b> During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.</p> |                                                                                                                       |

Table 5 - Short Pulse Radar Test Waveforms

| Radar Type                                                                                                                                  | Pulse Width (μsec) | PRI (μsec)                                                                                                                                                    | Number of Pulses                                                                                                 | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|---------------------------------------------------------------------------------------------------------------------------------------------|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|--------------------------------------------|--------------------------|
| 0                                                                                                                                           | 1                  | 1428                                                                                                                                                          | 18                                                                                                               | See Note 1                                 | See Note 1               |
| 1                                                                                                                                           | 1                  | Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a                                                                     | Roundup $\left\{ \left( \frac{1}{360} \right) \cdot \left( \frac{19 \cdot 10^6}{PRI_{\mu sec}} \right) \right\}$ | 60%                                        | 30                       |
|                                                                                                                                             |                    | Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A |                                                                                                                  |                                            |                          |
| 2                                                                                                                                           | 1-5                | 150-230                                                                                                                                                       | 23-29                                                                                                            | 60%                                        | 30                       |
| 3                                                                                                                                           | 6-10               | 200-500                                                                                                                                                       | 16-18                                                                                                            | 60%                                        | 30                       |
| 4                                                                                                                                           | 11-20              | 200-500                                                                                                                                                       | 12-16                                                                                                            | 60%                                        | 30                       |
| Aggregate (Radar Types 1-4)                                                                                                                 |                    |                                                                                                                                                               |                                                                                                                  | 80%                                        | 120                      |
| <b>Note 1:</b> Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. |                    |                                                                                                                                                               |                                                                                                                  |                                            |                          |

Table 5a - Pulse Repetition Intervals Values for Test A

| Pulse Repetition Frequency Number | Pulse Repetition Frequency (Pulses Per Second) | Pulse Repetition Interval (Microseconds) |
|-----------------------------------|------------------------------------------------|------------------------------------------|
| 1                                 | 1930.5                                         | 518                                      |
| 2                                 | 1858.7                                         | 538                                      |
| 3                                 | 1792.1                                         | 558                                      |
| 4                                 | 1730.1                                         | 578                                      |
| 5                                 | 1672.2                                         | 598                                      |
| 6                                 | 1618.1                                         | 618                                      |
| 7                                 | 1567.4                                         | 638                                      |
| 8                                 | 1519.8                                         | 658                                      |
| 9                                 | 1474.9                                         | 678                                      |
| 10                                | 1432.7                                         | 698                                      |
| 11                                | 1392.8                                         | 718                                      |
| 12                                | 1355                                           | 738                                      |
| 13                                | 1319.3                                         | 758                                      |
| 14                                | 1285.3                                         | 778                                      |
| 15                                | 1253.1                                         | 798                                      |
| 16                                | 1222.5                                         | 818                                      |
| 17                                | 1193.3                                         | 838                                      |
| 18                                | 1165.6                                         | 858                                      |
| 19                                | 1139                                           | 878                                      |
| 20                                | 1113.6                                         | 898                                      |
| 21                                | 1089.3                                         | 918                                      |
| 22                                | 1066.1                                         | 938                                      |
| 23                                | 326.2                                          | 3066                                     |

The aggregate is the average of the percentage of successful detections of Short Pulse Radar

Types 1-4. For example, the following table indicates how to compute the aggregate of percentage of successful detections.

| Radar Type                                           | Number of Trials | Number of Successful Detections | Minimum Percentage of Successful Detection |
|------------------------------------------------------|------------------|---------------------------------|--------------------------------------------|
| 1                                                    | 35               | 29                              | 82.9%                                      |
| 2                                                    | 30               | 18                              | 60%                                        |
| 3                                                    | 30               | 27                              | 90%                                        |
| 4                                                    | 50               | 44                              | 88%                                        |
| Aggregate $(82.9\% + 60\% + 90\% + 88\%)/4 = 80.2\%$ |                  |                                 |                                            |

Long Pulse Radar Test Waveform

Table 6 - Long Pulse Radar Test Waveform

| Radar Type | Pulse Width (μsec) | Chirp Width (MHz) | PRI (μsec) | Number of Pulses per Burst | Number of Bursts | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|------------|--------------------|-------------------|------------|----------------------------|------------------|--------------------------------------------|--------------------------|
| 5          | 50-100             | 5-20              | 1000-2000  | 1-3                        | 8-20             | 80%                                        | 30                       |

Figure 1 provides a graphical representation of the Long Pulse Radar Test Waveform.

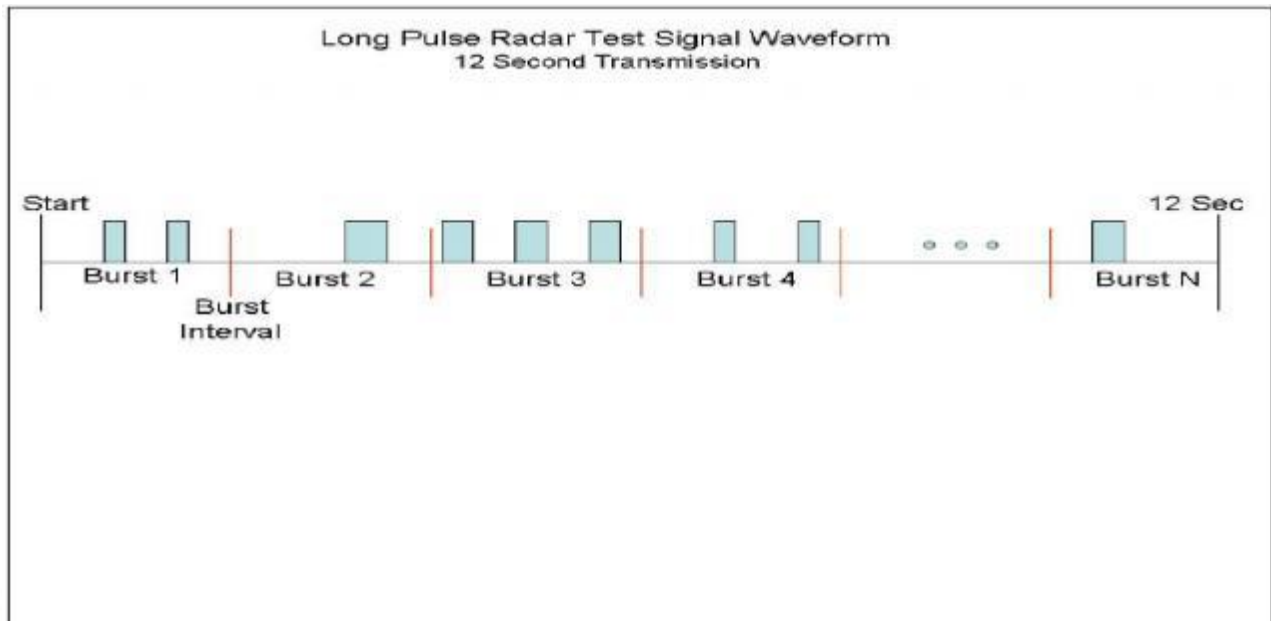


Table 7 - Frequency Hopping Radar Test Waveform

| Radar Type | Pulse Width (μsec) | PRI (μsec) | Pulses per Hop | Hopping Rate (kHz) | Hopping Sequence Length (msec) | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|------------|--------------------|------------|----------------|--------------------|--------------------------------|--------------------------------------------|--------------------------|
| 6          | 1                  | 333        | 9              | 0.333              | 300                            | 70%                                        | 30                       |

## **7.2 DFS -TEST RESULTS**

### **7.2.1 DFS MEASUREMENT METHODS**

#### **a. DFS - CHANNEL CLOSING TRANSMISSION TIME AND CHANNEL MOVE TIME**

Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

#### **b. DFS - CHANNEL NON-OCCUPANCY AND VERIFICATION OF PASSIVE SCANNING**

Non-occupancy Period. A channel that has been flagged as containing a radar system, either by a channel availability check or in-service monitoring, is subject to a non-occupancy period of at least 30 minutes. The non-occupancy period starts at the time when the radar system is detected.

#### **c. CHANNEL AVAILABILITY CHECK TIME**

Channel Availability Check Time. A U-NII device shall check if there is a radar system already operating on the channel before it can initiate a transmission on a channel and when it has to move to a new channel. The U-NII device may start using the channel if no radar signal with a power level greater than the interference threshold values listed in paragraph (h)(2) of this section, is detected within 60 seconds.

#### **d. CONTROL (TPC)**

Compliance with the transmit power control requirements for devices is demonstrated through measurements showing multiple power levels and manufacturer statements explaining how the power control is implemented.

#### **e. DETECTION PROBABILITY / SUCCESS RATE**

During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic. Minimum 100% of the U-NII 99% transmission power bandwidth.

#### **f. NON- OCCUPANCY PERIOD**

During the 30 minutes observation time, UUT did not make any transmissions on a channel after a radar signal was detected on that channel by either the Channel Availability Check or the In-Service Monitoring

## 7.2.2 DFS CONDUCTION TEST METHOD

a. The signal level of the simulated waveform is set to a reference level equal to the threshold

level (plus 1dB if testing against FCC requirements). Lower levels may also be applied on request of the manufacturer.


The signal level is verified by measuring the CW signal level at the coupling point to the RDD

antenna port. The radar signal level is calculated from the measured level, R (dBm) and the lowest gain antenna assembly intended for use with the RDD

If both master and client devices have radar detection capability then the radar level at the non

RDD is verified to be at least 20dB below the threshold level to ensure that any responses are due to the RDD detecting radar.

The antenna connected to the channel monitoring subsystem is positioned to allow both master and client transmissions to be observed, with the level of the EUT's transmissions between 6 and 10dB higher than those from the other device.

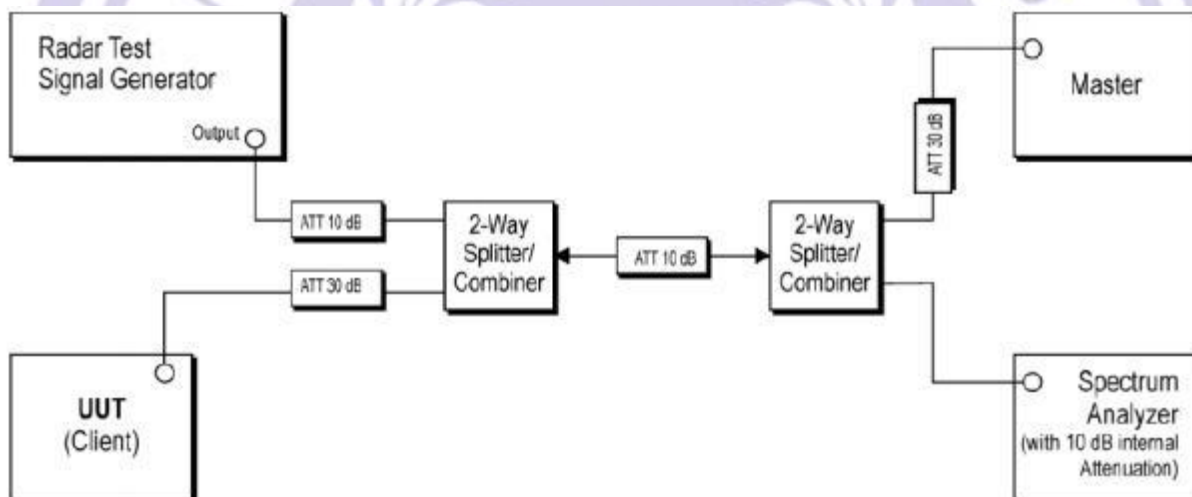

b. Set-up B is a set-up whereby the UUT is an RLAN device operating in slave mode, with or

without Radar Interference Detection function. This set-up also contains an RLAN device


operating in master mode. The radar test signals are injected into the master device. The UUT

(slave device) is associated with the master device. Figure 5 shows an example for Set-up B. The set-up used shall be documented in the test report.



Channel loading mode:


EUT connects to the router through DFS setup, then controls and switches the EUT channel on the router background page.

## 7.3 DFS Test Data

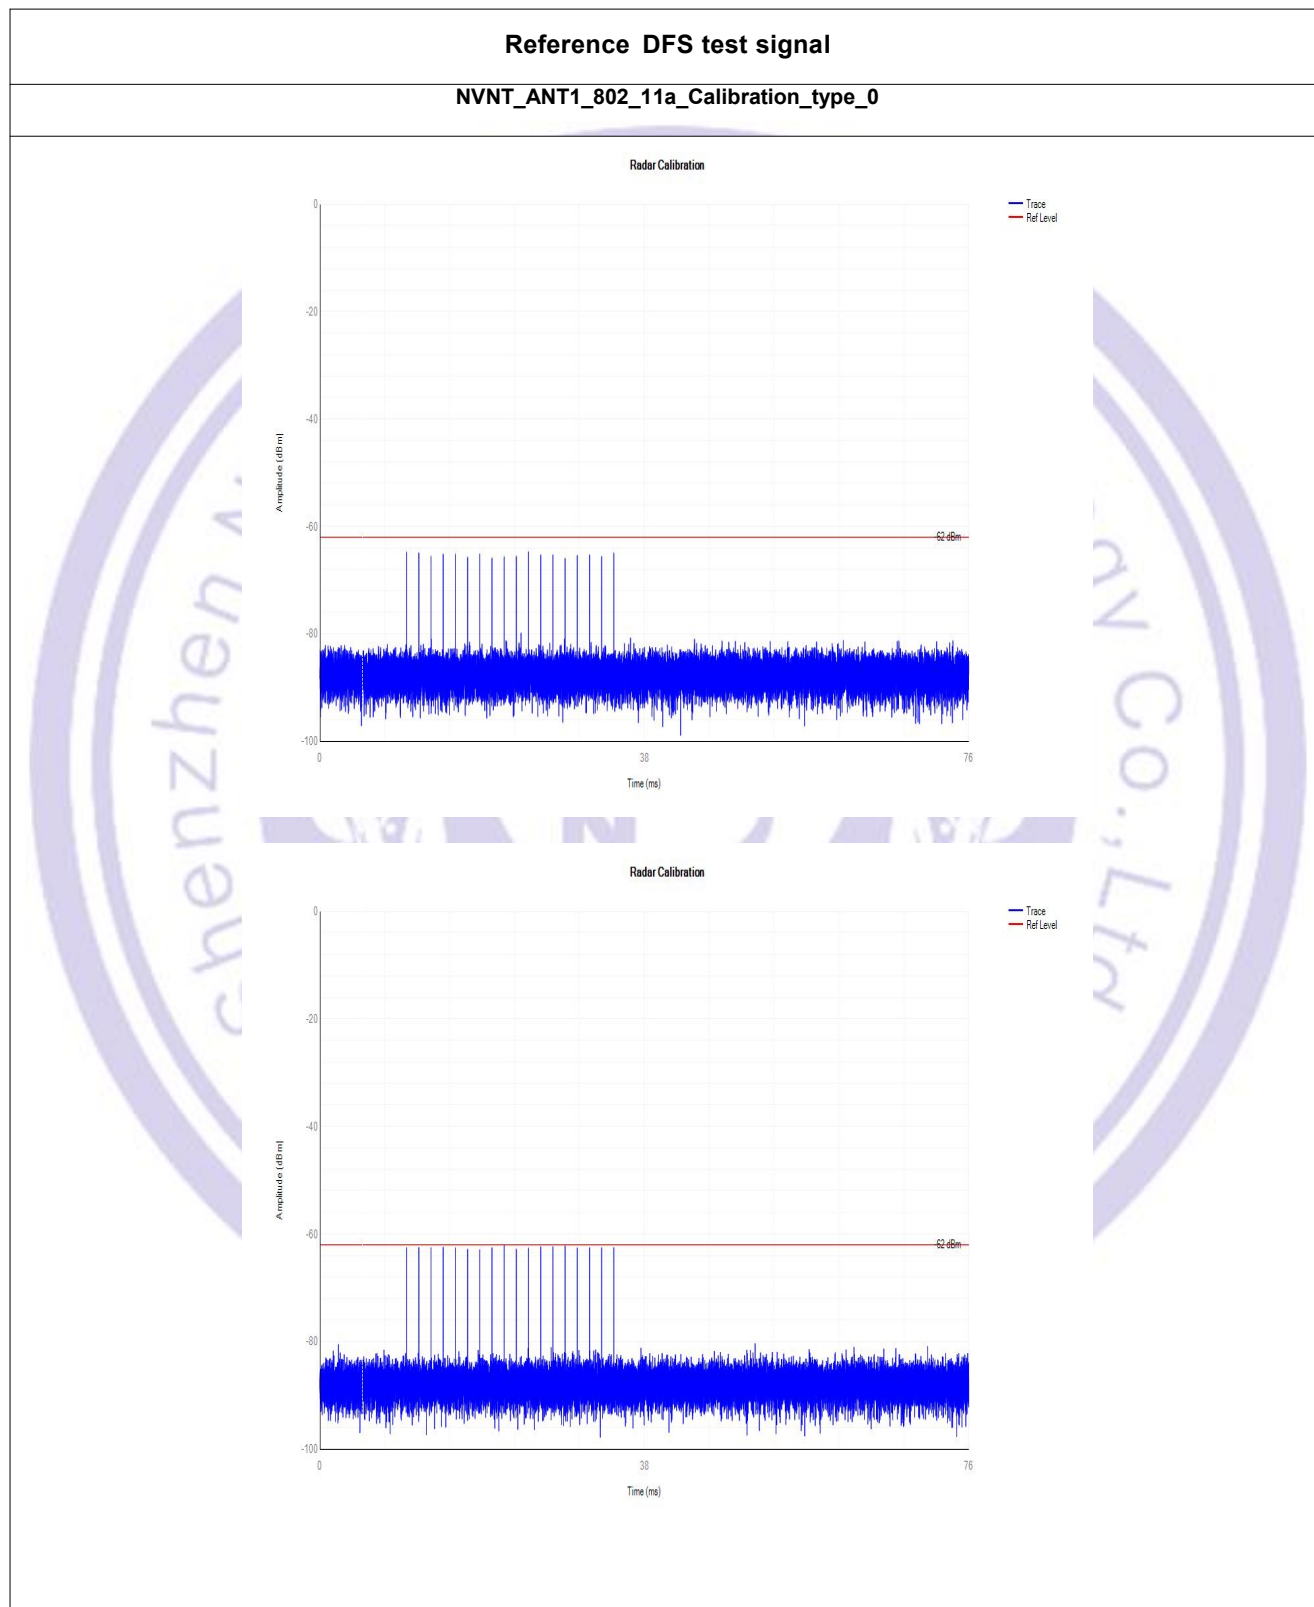


## NVNT\_ANT1\_802\_11ac(VHT40)\_Calibration\_type\_0

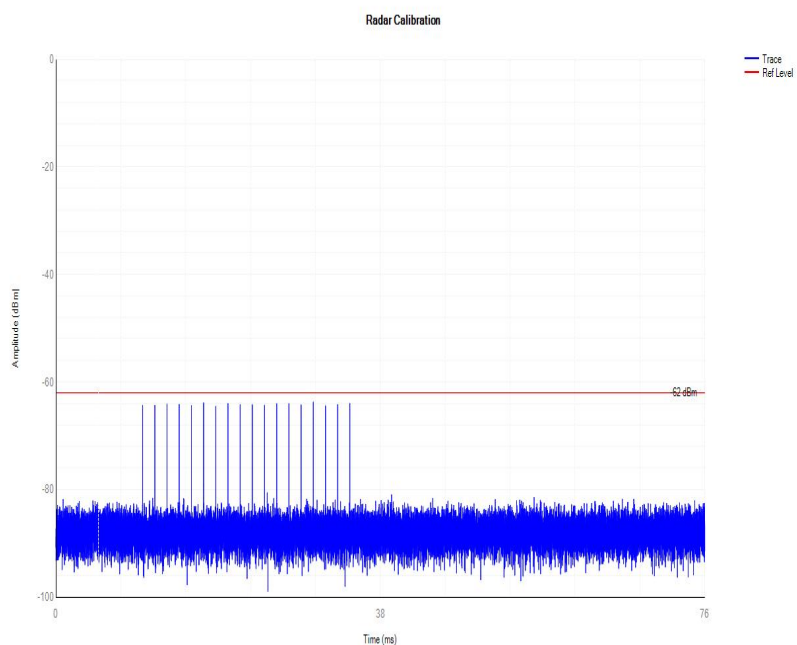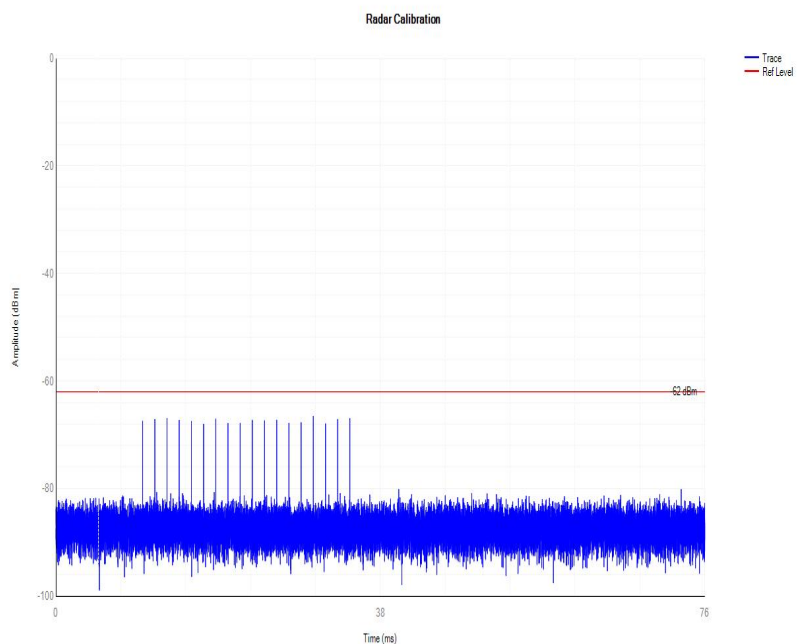

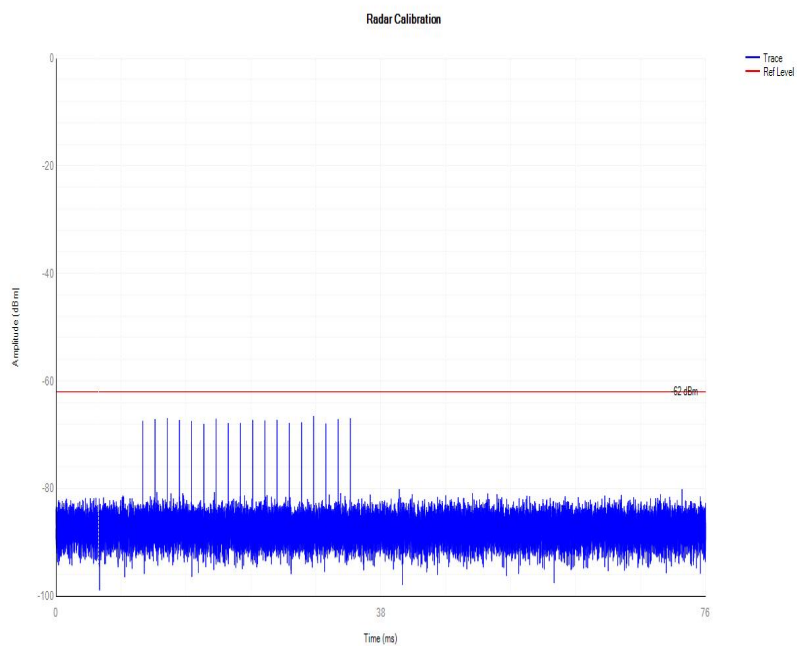


NVNT\_ANT1\_802\_11ac(VHT80)\_Calibration\_type\_0

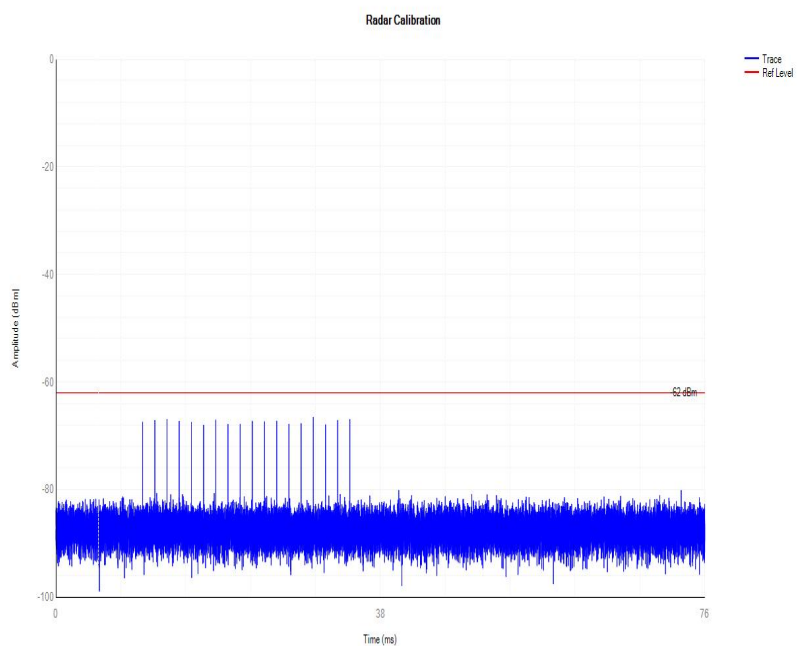


## Non-Occupancy


### 802.11a 5320MHz Non-Occupancy

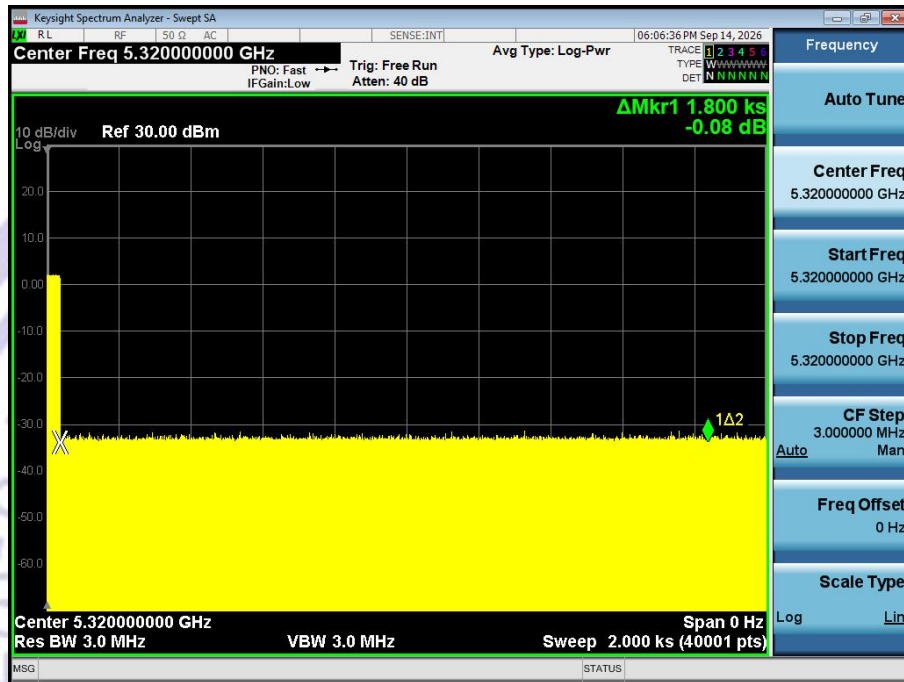


### 802.11a 5500MHz Non-Occupancy

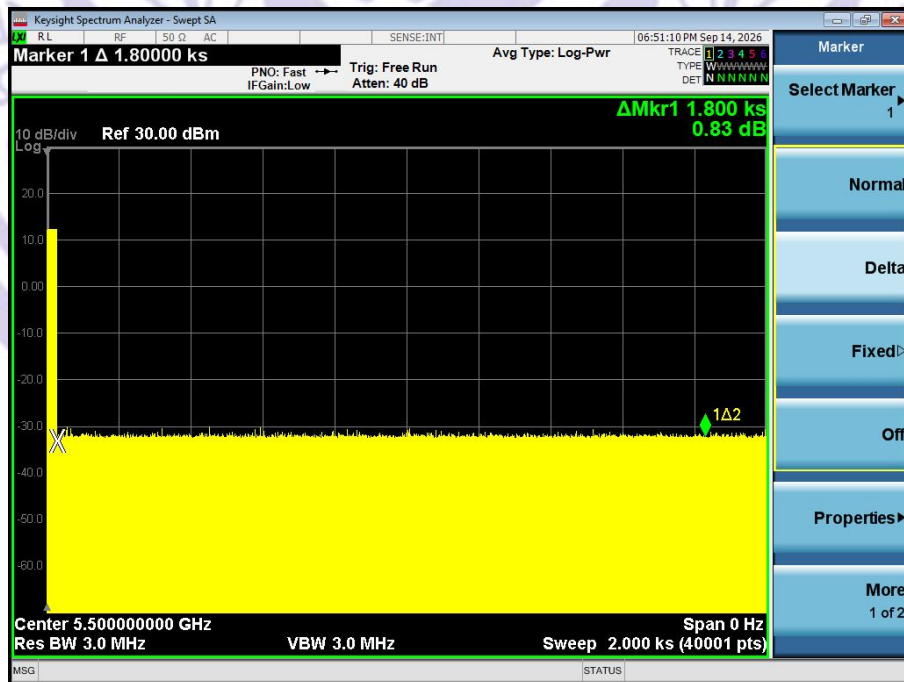


## 802.11ac40 5310MHz Non-Occupancy

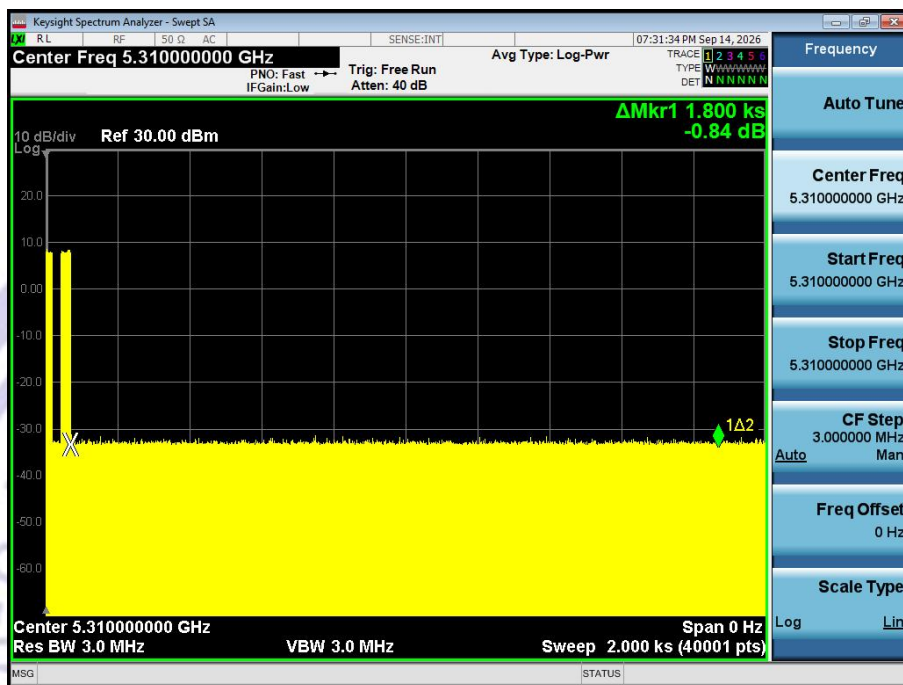

## 802.11ac40 5510MHz Non-Occupancy

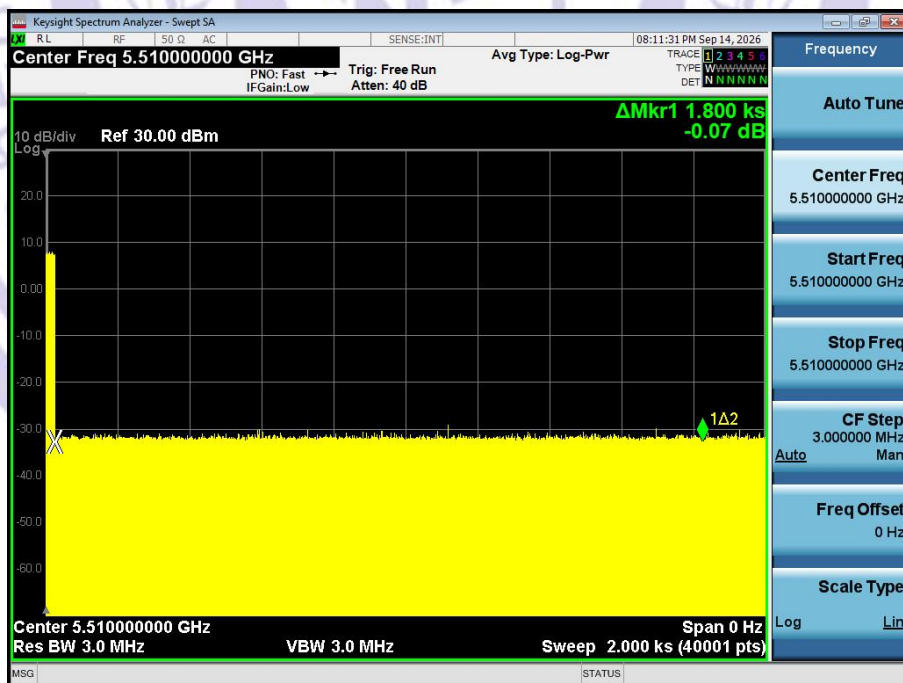

## 802.11ac80 5610MHz Non-Occupancy

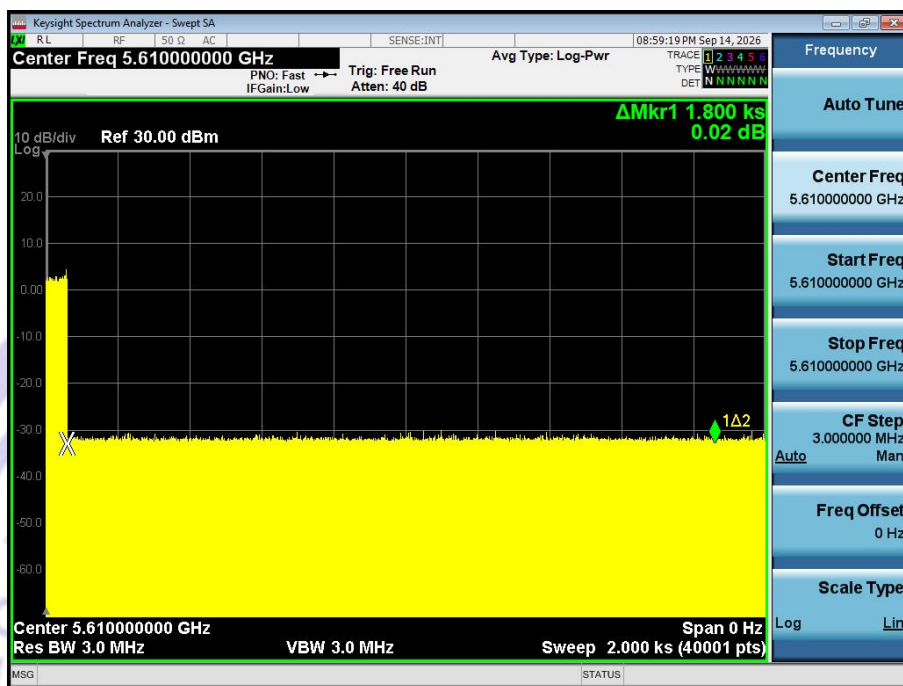


**TEST RESULTS- FCC Part 15.407 CLIENT DEVICE Shutdown Time**

| Mode | Channel<br>Move<br>Time<br>(s) | Channel<br>Move Time<br>(s) | Limit<br>Channel<br>Move<br>Time<br>(s) | Close<br>Transmissio<br>n<br>Time (ms) | Limit Close<br>Transmission<br>Time<br>(ms) | Close<br>Transmission<br>Time after<br>200 (ms) | Limit Close<br>Transmission<br>Time after<br>200 (ms) | Verdict |
|------|--------------------------------|-----------------------------|-----------------------------------------|----------------------------------------|---------------------------------------------|-------------------------------------------------|-------------------------------------------------------|---------|
| a    | 5320                           | 0.104                       | 10                                      | 0.017                                  | 0.26                                        | 0                                               | 0.06                                                  | Pass    |
| a    | 5500                           | 0.119                       | 10                                      | 0.017                                  | 0.26                                        | 0                                               | 0.06                                                  | Pass    |
| ac40 | 5310                           | 0.109                       | 10                                      | 0.013                                  | 0.26                                        | 0                                               | 0.06                                                  | Pass    |
| ac40 | 5510                           | 0.115                       | 10                                      | 0.009                                  | 0.26                                        | 0                                               | 0.06                                                  | Pass    |
| ac80 | 5290                           | 0.215                       | 10                                      | 0.013                                  | 0.26                                        | 0                                               | 0.06                                                  | Pass    |
| ac80 | 5530                           | 0.205                       | 10                                      | 0.005                                  | 0.26                                        | 0                                               | 0.06                                                  | Pass    |


**Notes:**

- 1) Tests were performed using the conduction test method.
- 2) Channel availability check, detection threshold and non-occupancy period are not applicable to client devices.


## 5320MHz a Shutdown

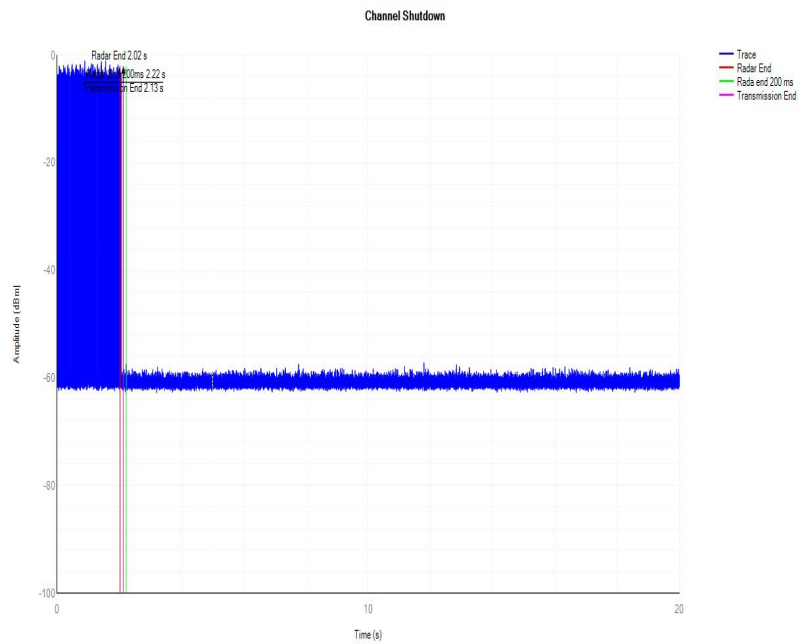


## 5500MHz a Shutdown

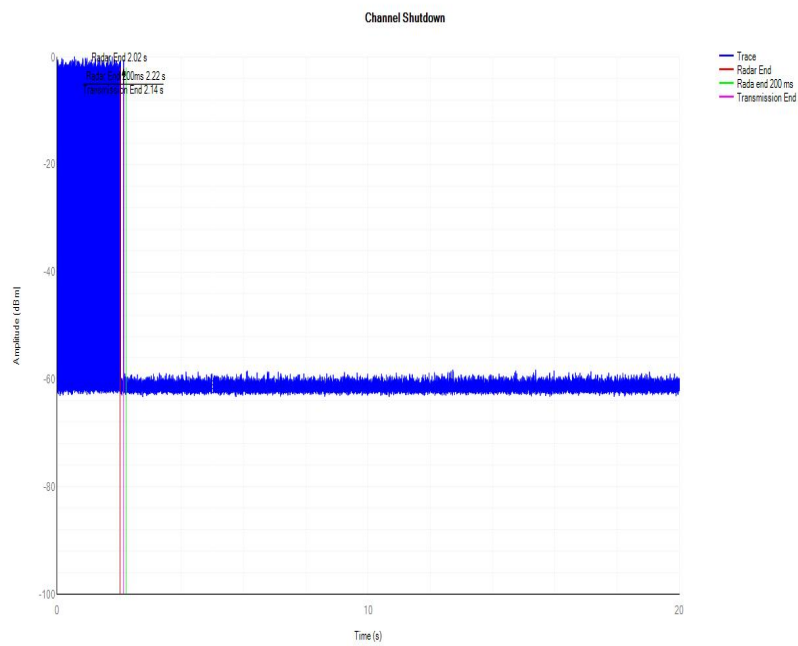


## 5310MHz ac40 Shutdown

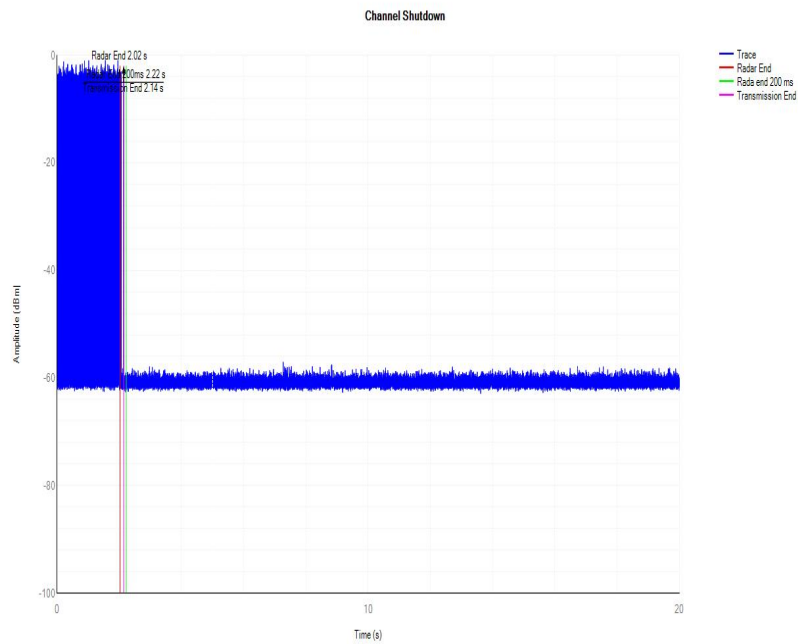


## 5510MHz ac40 Shutdown

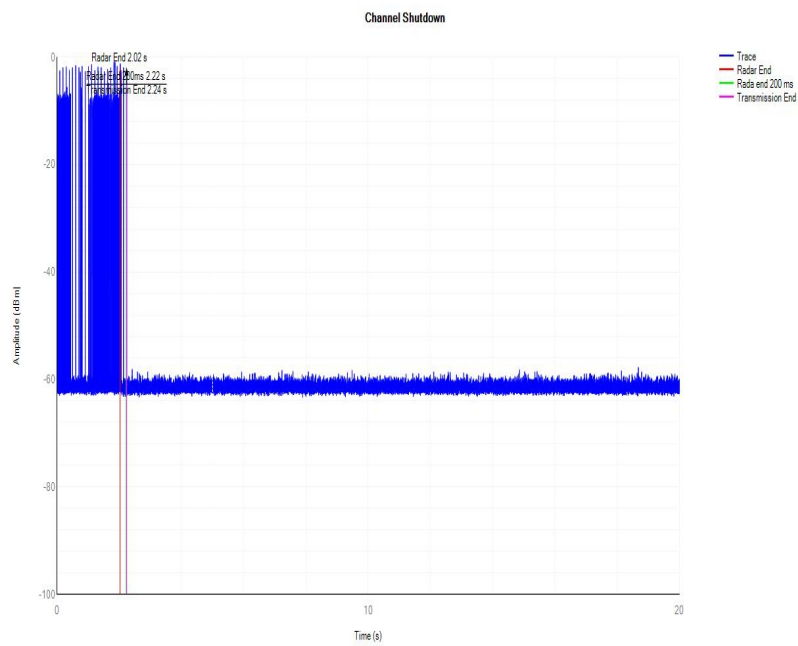

## 5320MHz ac 80 Shutdown

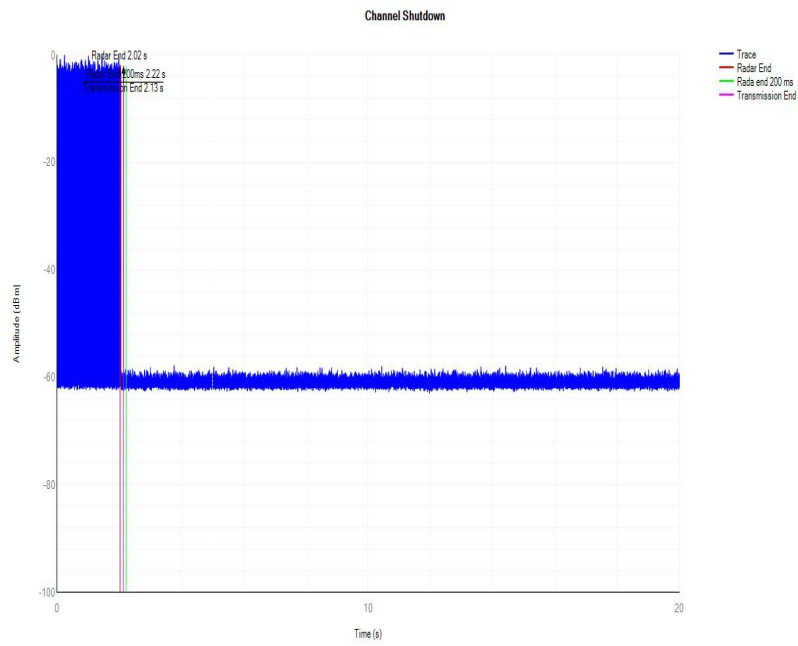

## 5500MHz ac 80 Shutdown

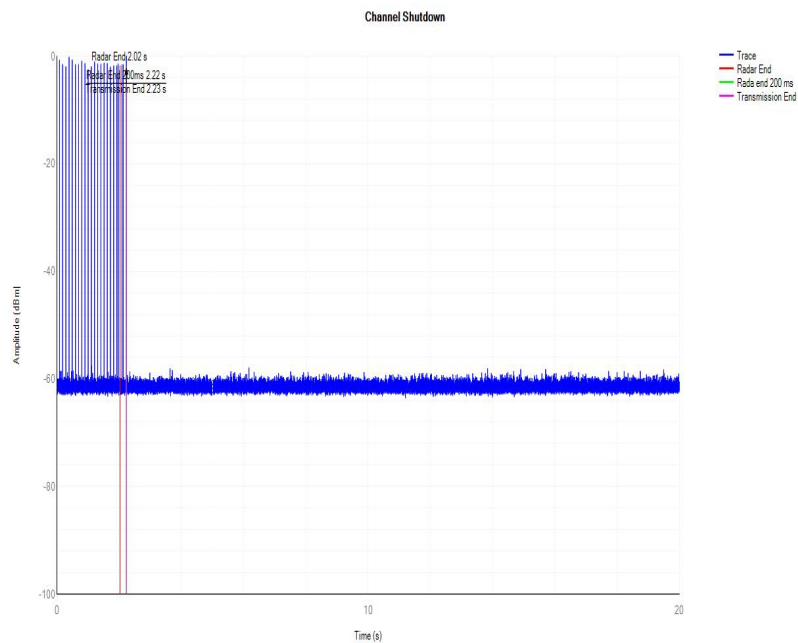

## 8 TEST SETUP & EUT PHOTOGRAPH

Please see the attachment for details.



## 9 EUT PHOTOGRAPH

Please see the attachment for details.

----- End of Report -----

