


1. Bandwidth

1.1 OBW


1.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)	Verdict
					Result	
GFSK	SISO	2402	DH5	1	0.840	Pass
		2441	DH5	1	0.844	Pass
		2480	DH5	1	0.839	Pass
PI/4DQPSK	SISO	2402	2DH5	1	1.178	Pass
		2441	2DH5	1	1.180	Pass
		2480	2DH5	1	1.178	Pass
8DPSK	SISO	2402	3DH5	1	1.182	Pass
		2441	3DH5	1	1.184	Pass
		2480	3DH5	1	1.184	Pass


1.1.2 Test Graph

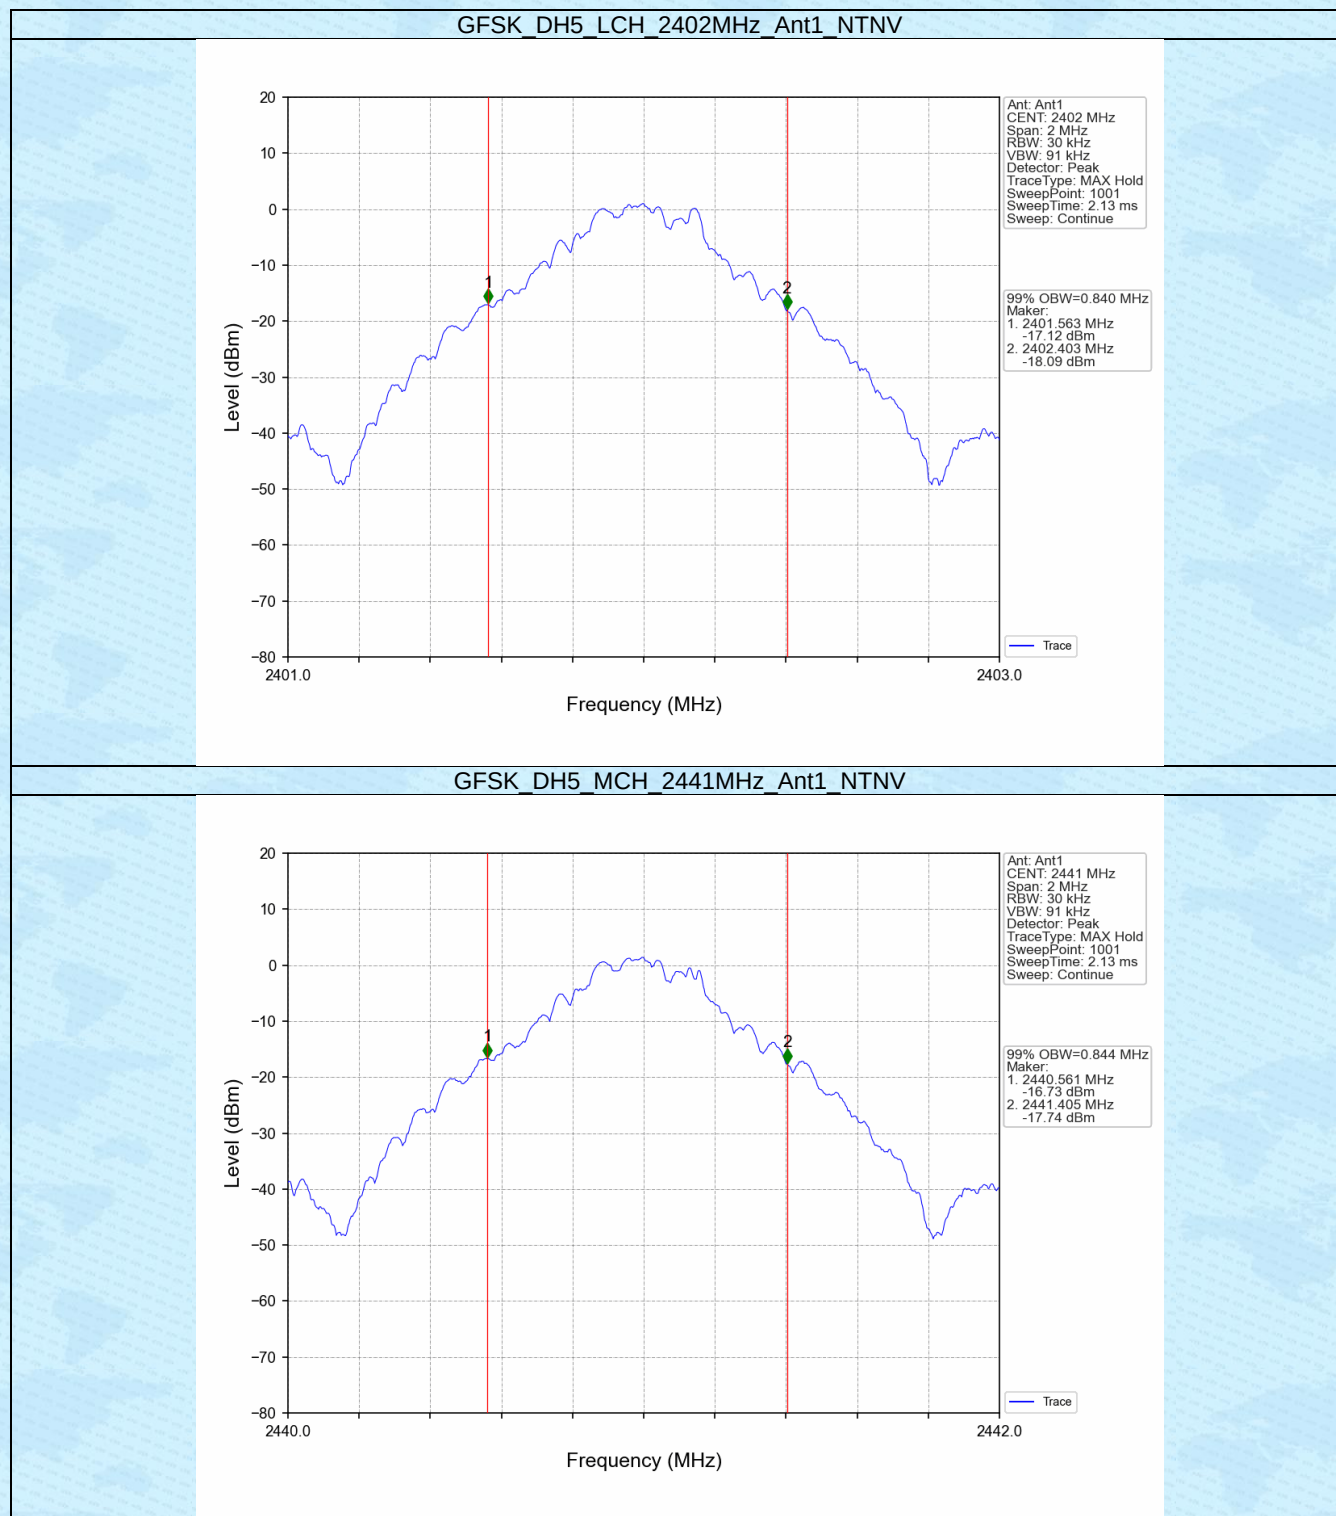


GFSK DH5_HCH_2480MHz_Ant1_NTNV

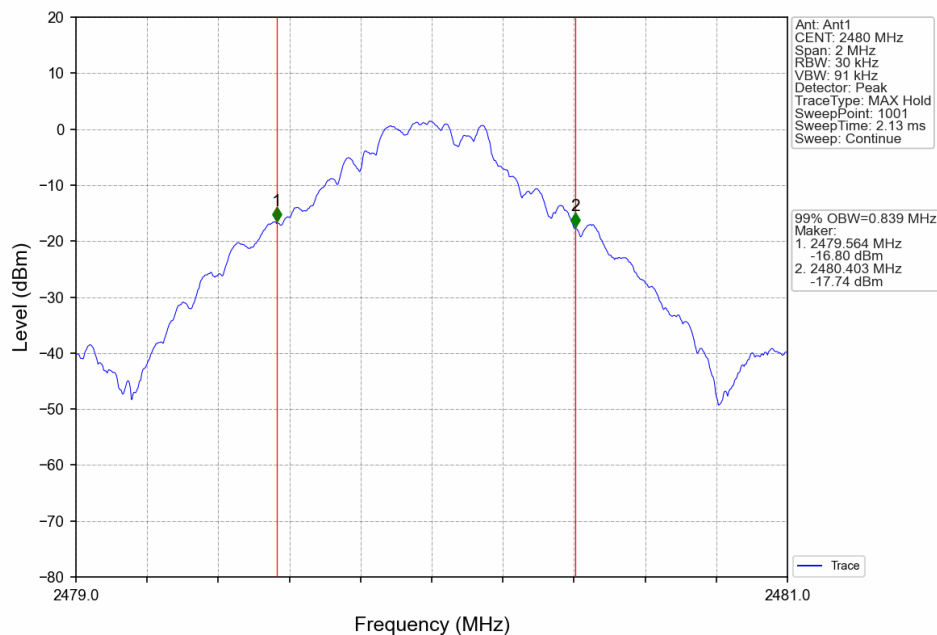


PI/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

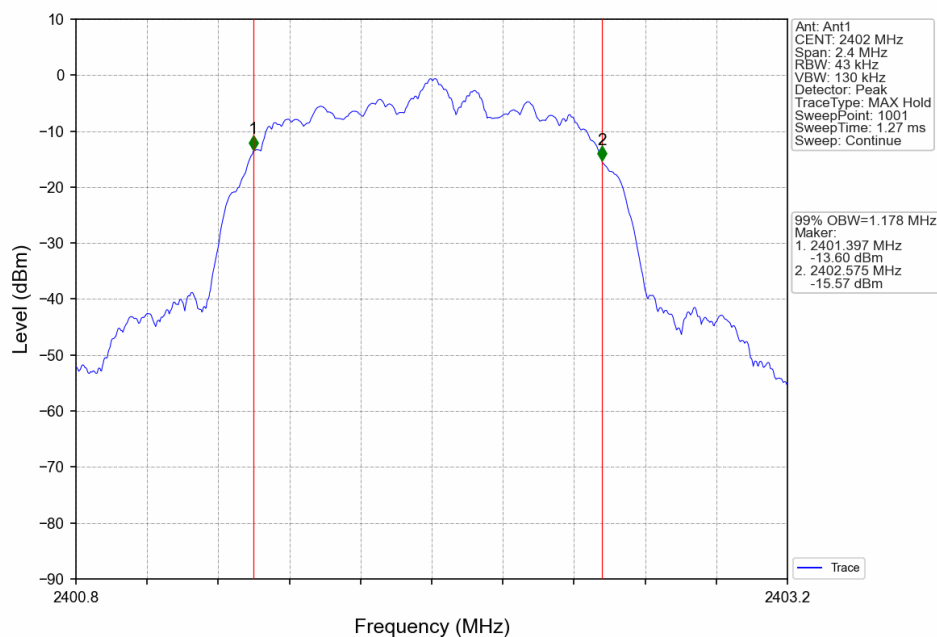


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

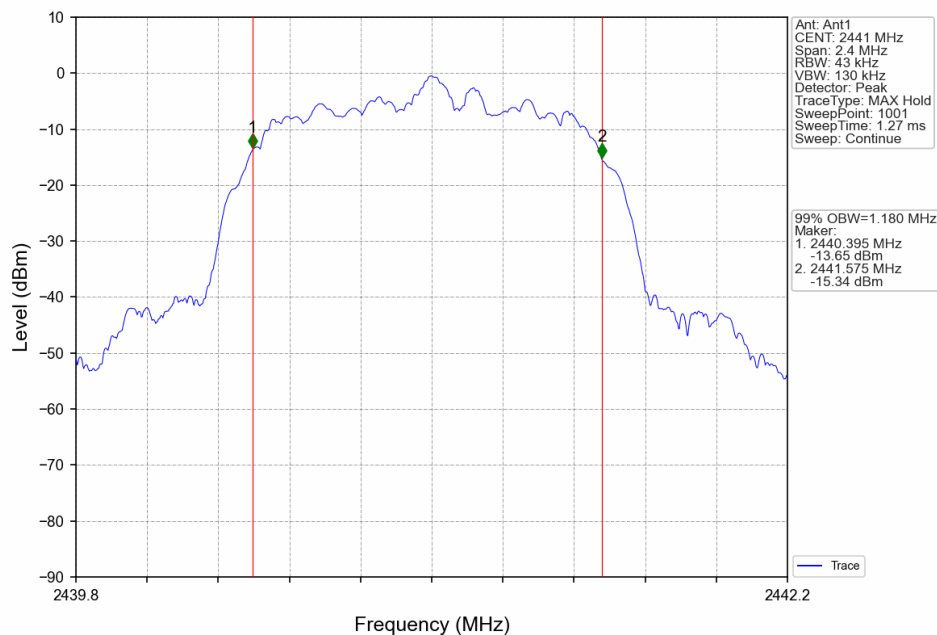


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

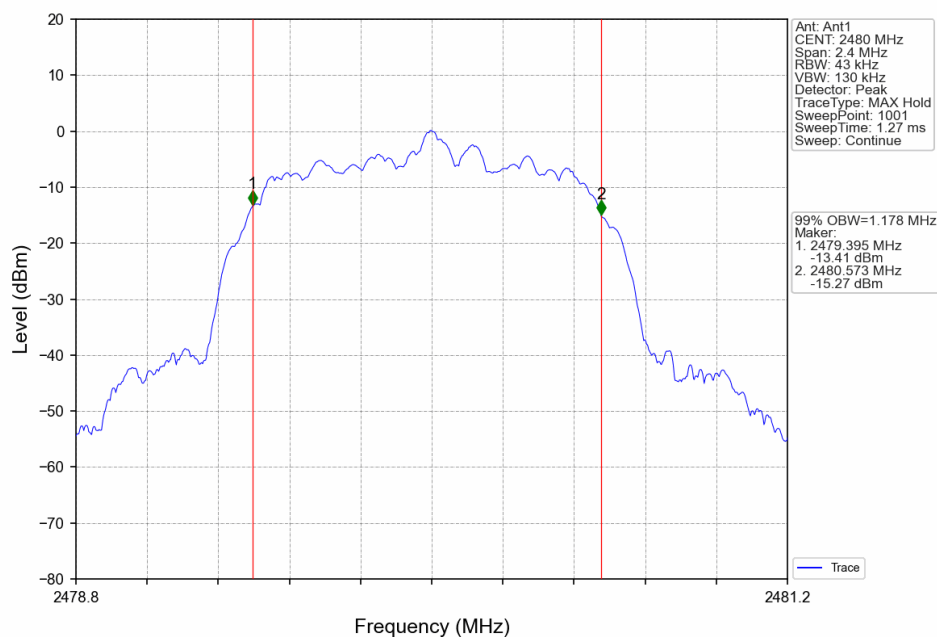


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

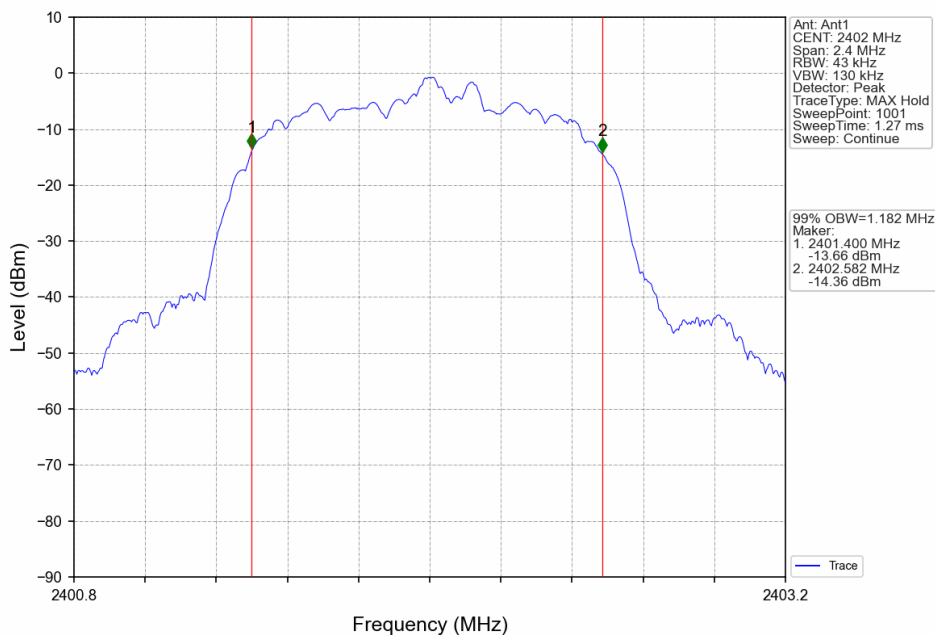

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

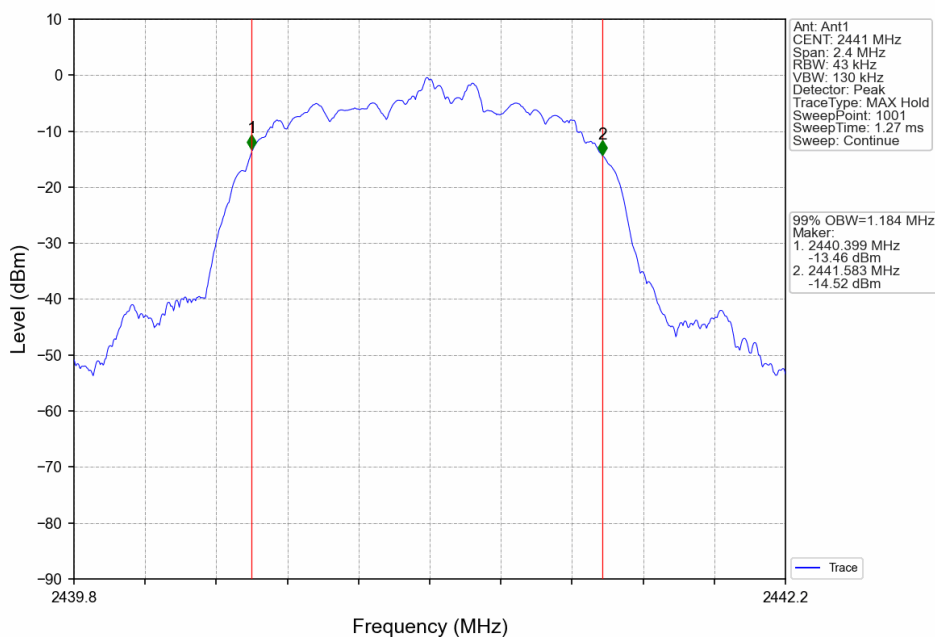

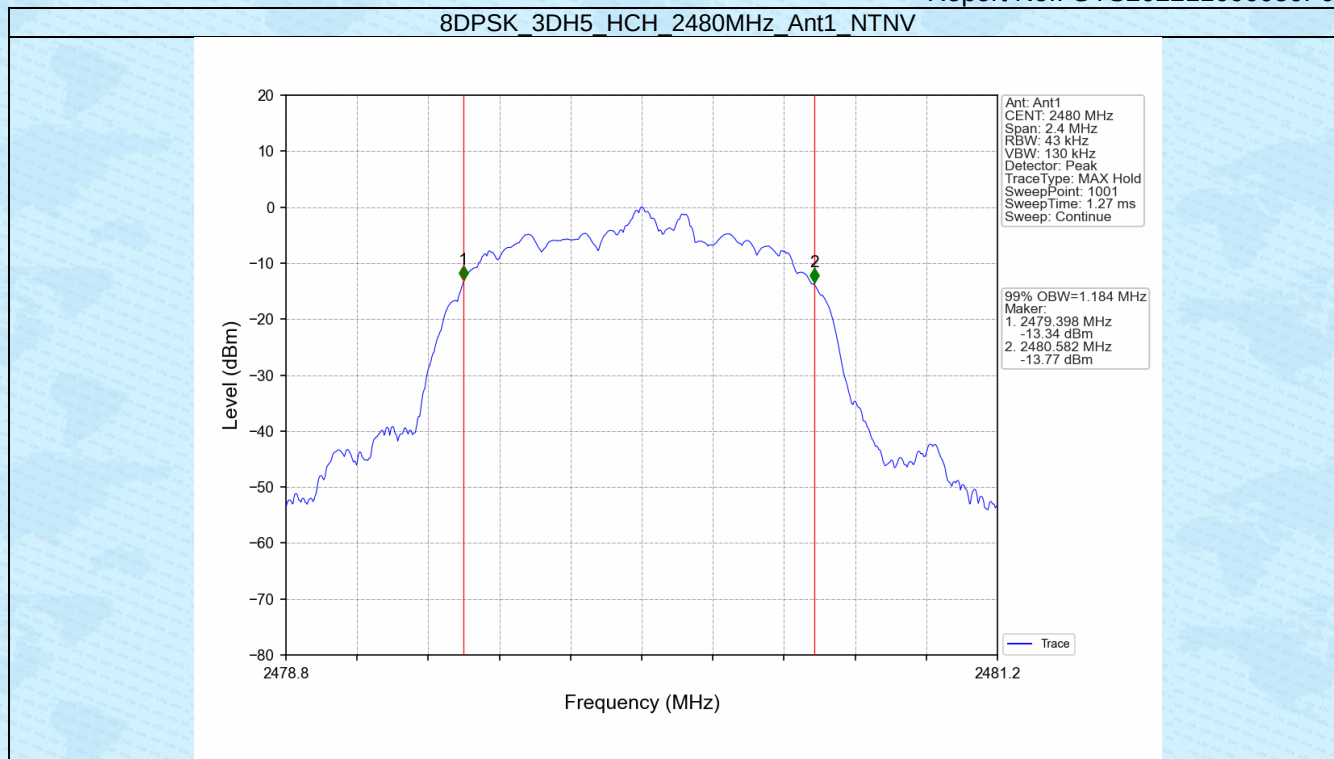


1.2 20dB BW


1.2.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)	Verdict
					Result	
GFSK	SISO	2402	DH5	1	0.943	Pass
		2441	DH5	1	0.946	Pass
		2480	DH5	1	0.943	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.298	Pass
		2441	2DH5	1	1.298	Pass
		2480	2DH5	1	1.301	Pass
8DPSK	SISO	2402	3DH5	1	1.313	Pass
		2441	3DH5	1	1.310	Pass
		2480	3DH5	1	1.315	Pass


1.2.2 Test Graph

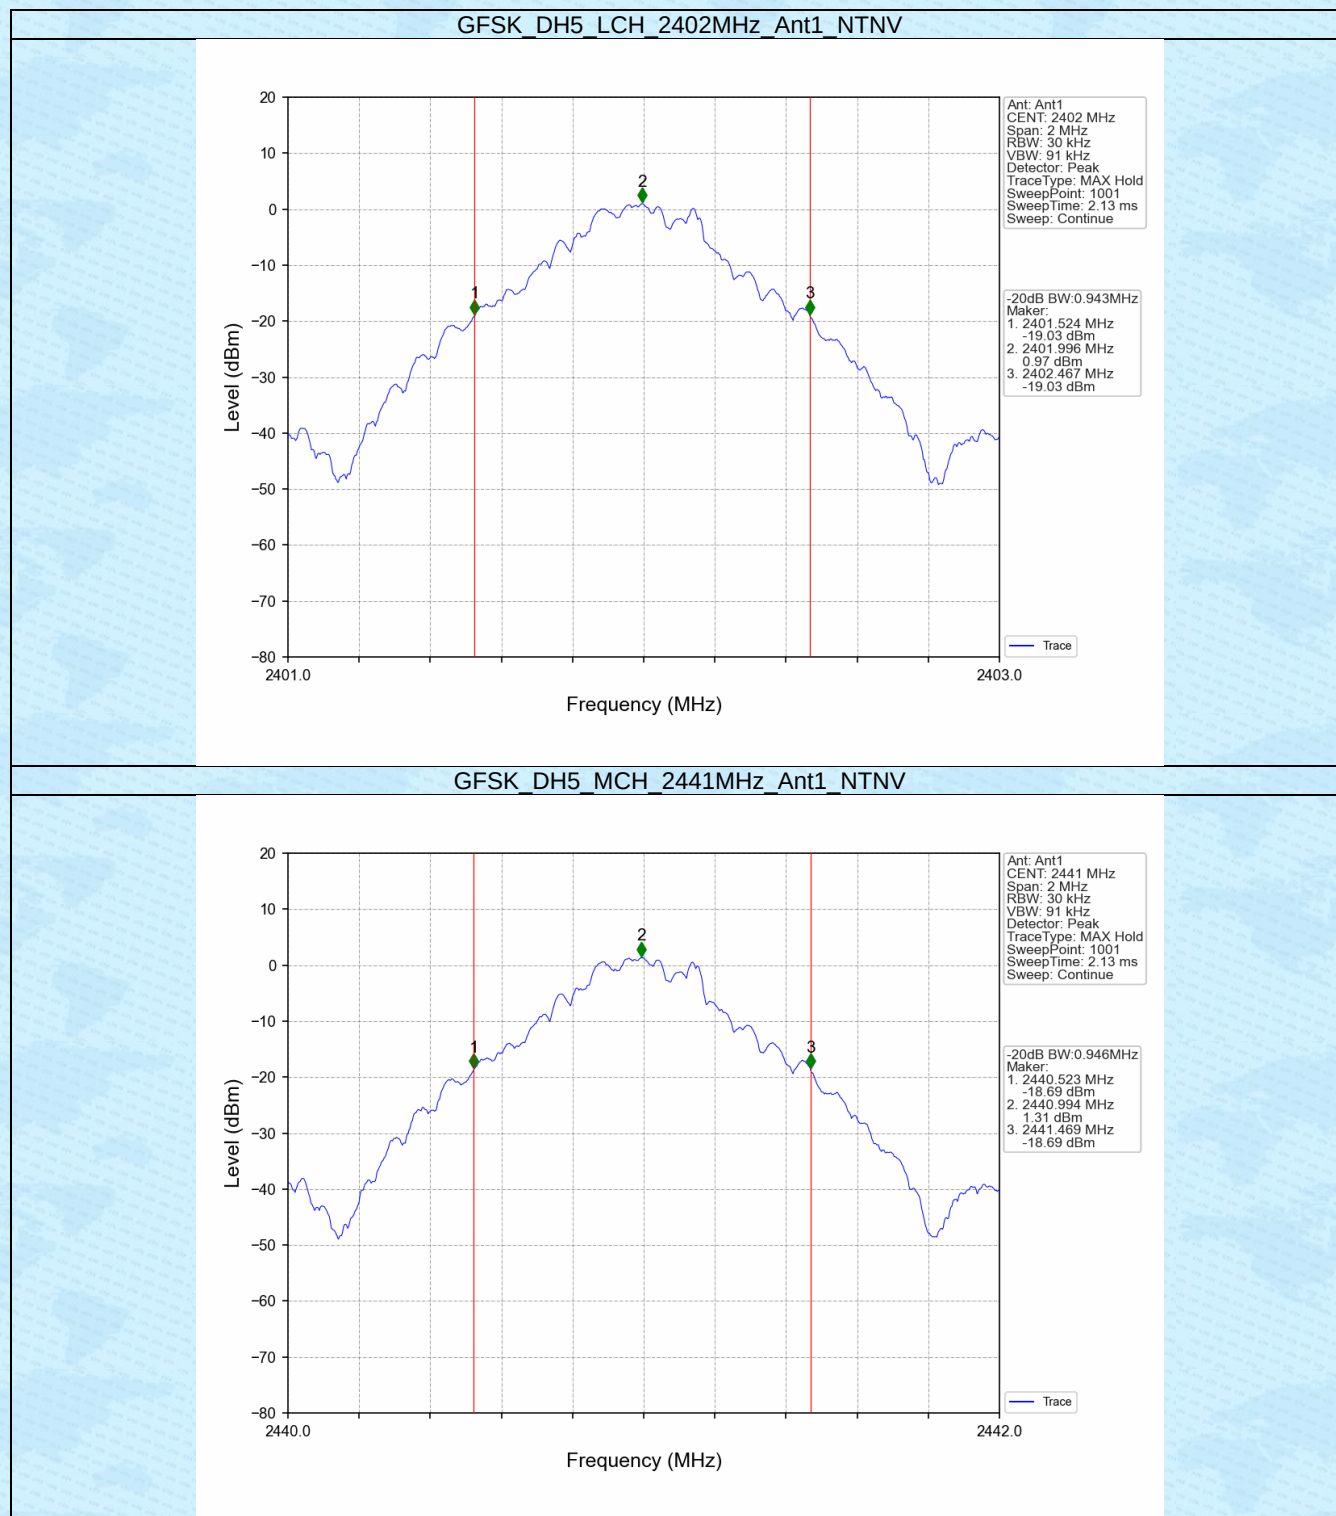


GFSK DH5_HCH_2480MHz_Ant1_NTNV

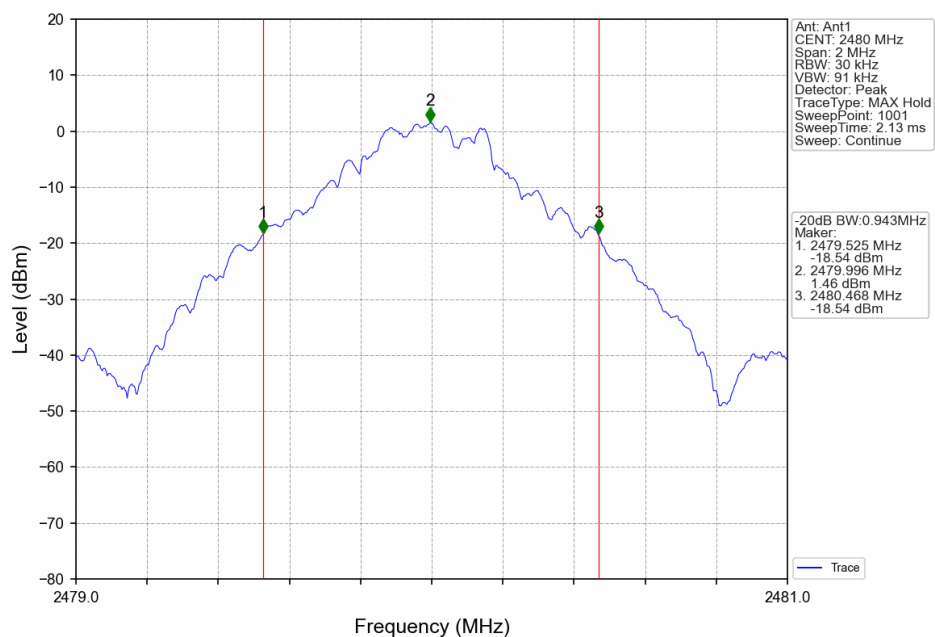


PI/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

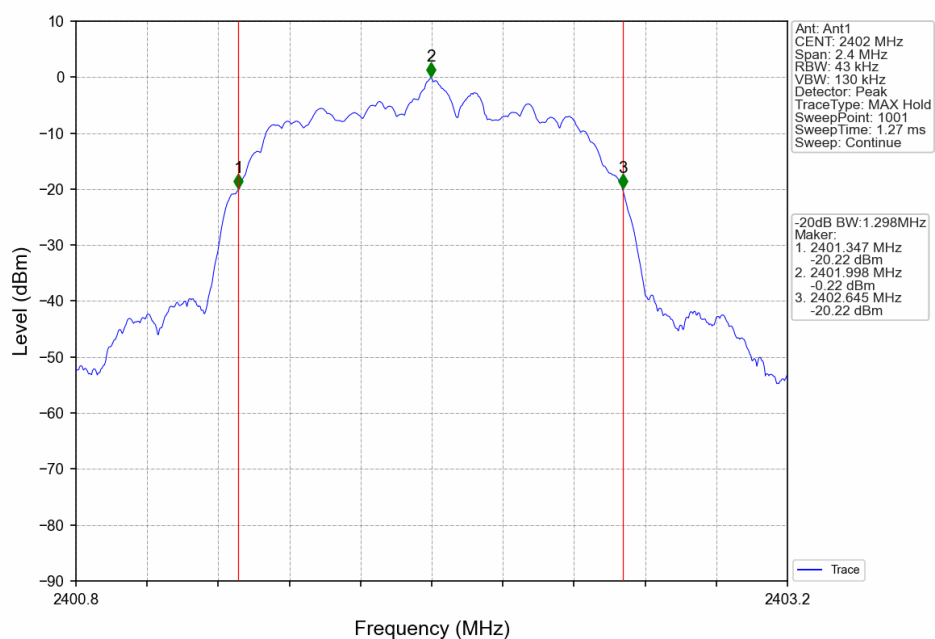


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

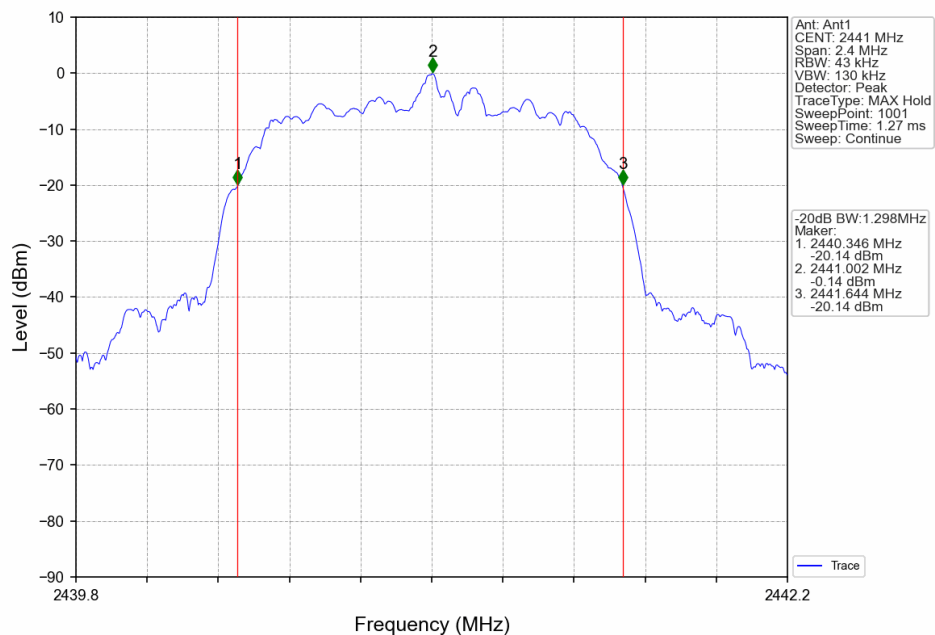


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

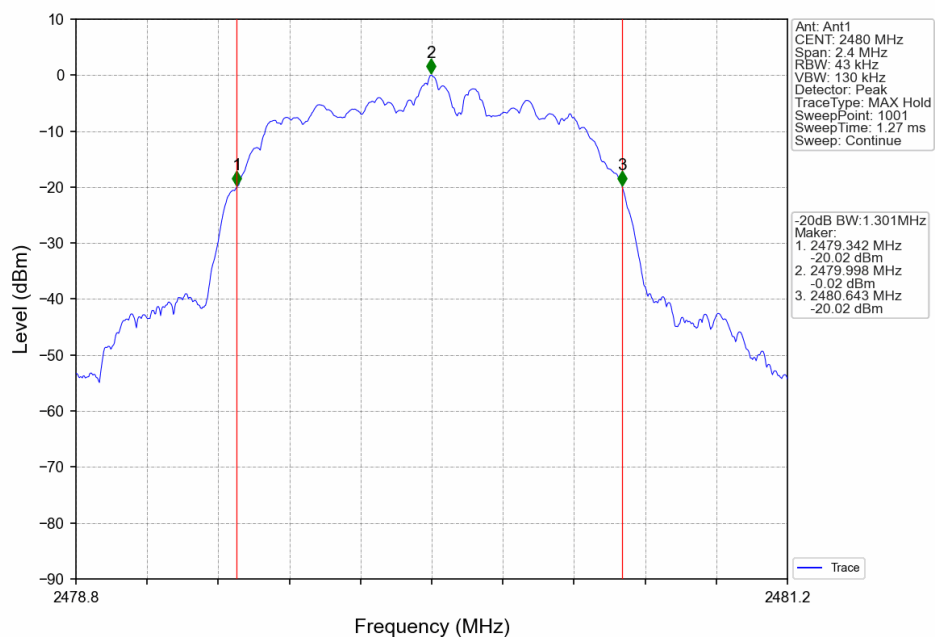


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

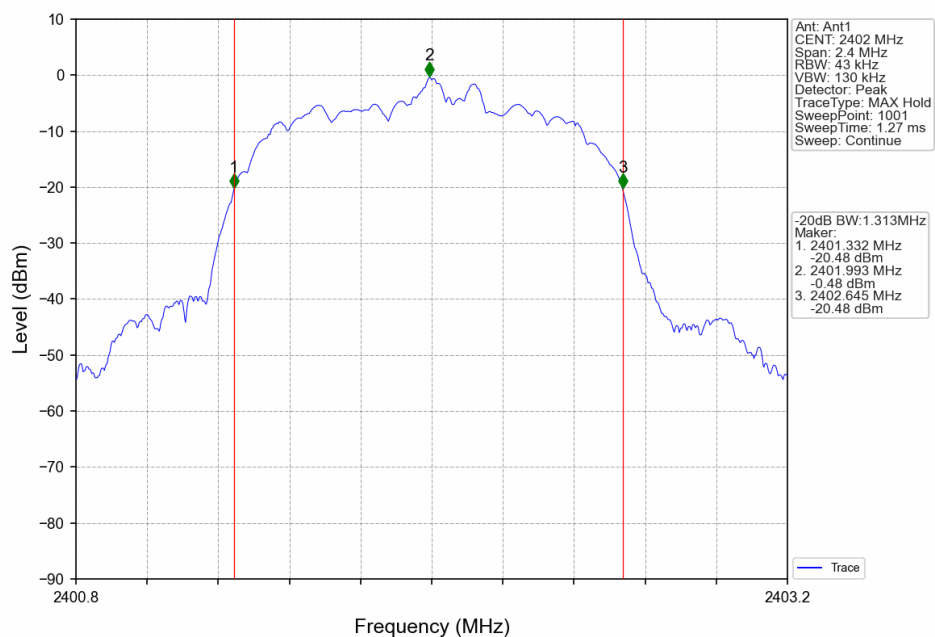

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

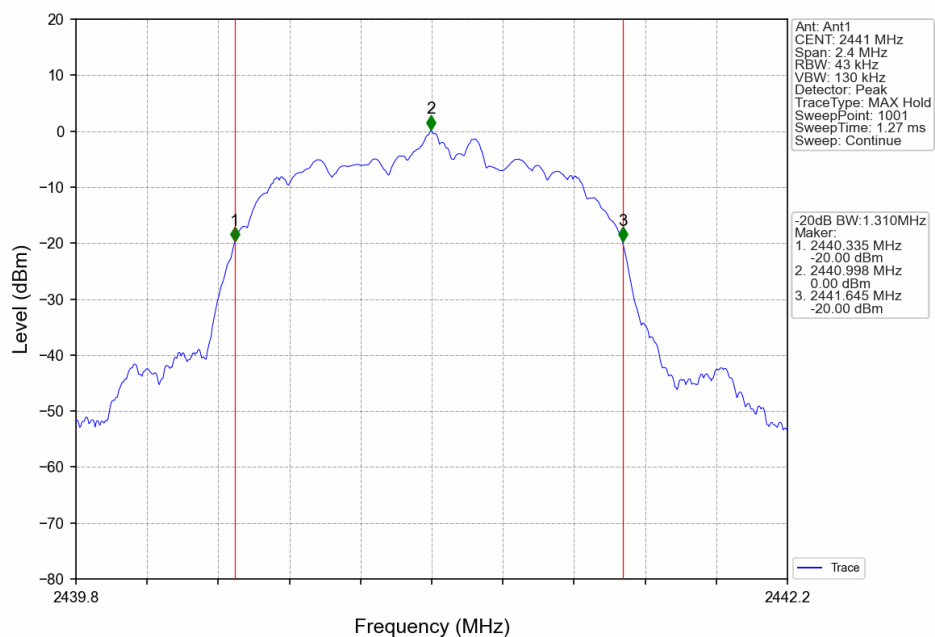

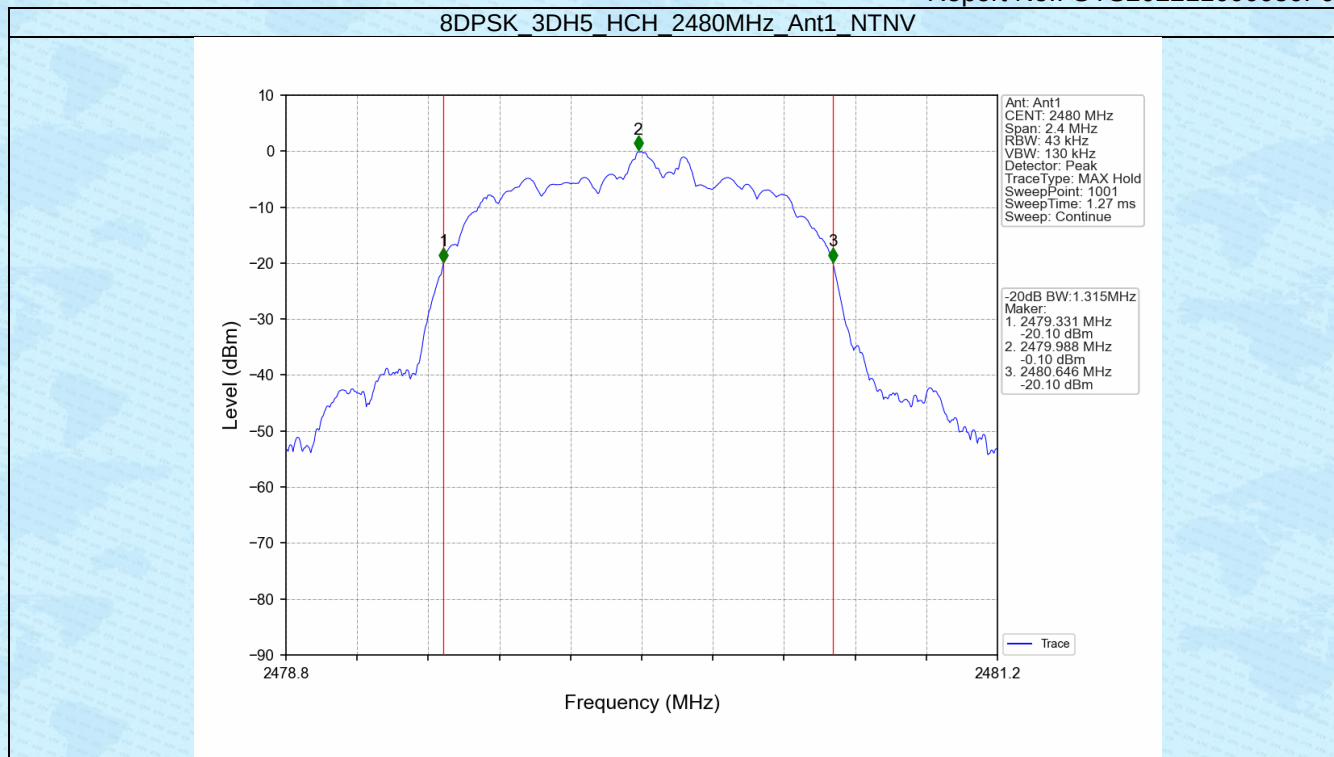


2. Maximum Conducted Output Power

2.1 Power


2.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	3.49	<=30	Pass
		2441	DH5	4.00	<=30	Pass
		2480	DH5	3.99	<=30	Pass
Pi/4DQPSK	SISO	2402	2DH5	3.01	<=20.97	Pass
		2441	2DH5	3.11	<=20.97	Pass
		2480	2DH5	3.35	<=20.97	Pass
8DPSK	SISO	2402	3DH5	3.25	<=20.97	Pass
		2441	3DH5	3.71	<=20.97	Pass
		2480	3DH5	3.81	<=20.97	Pass


2.1.2 Test Graph

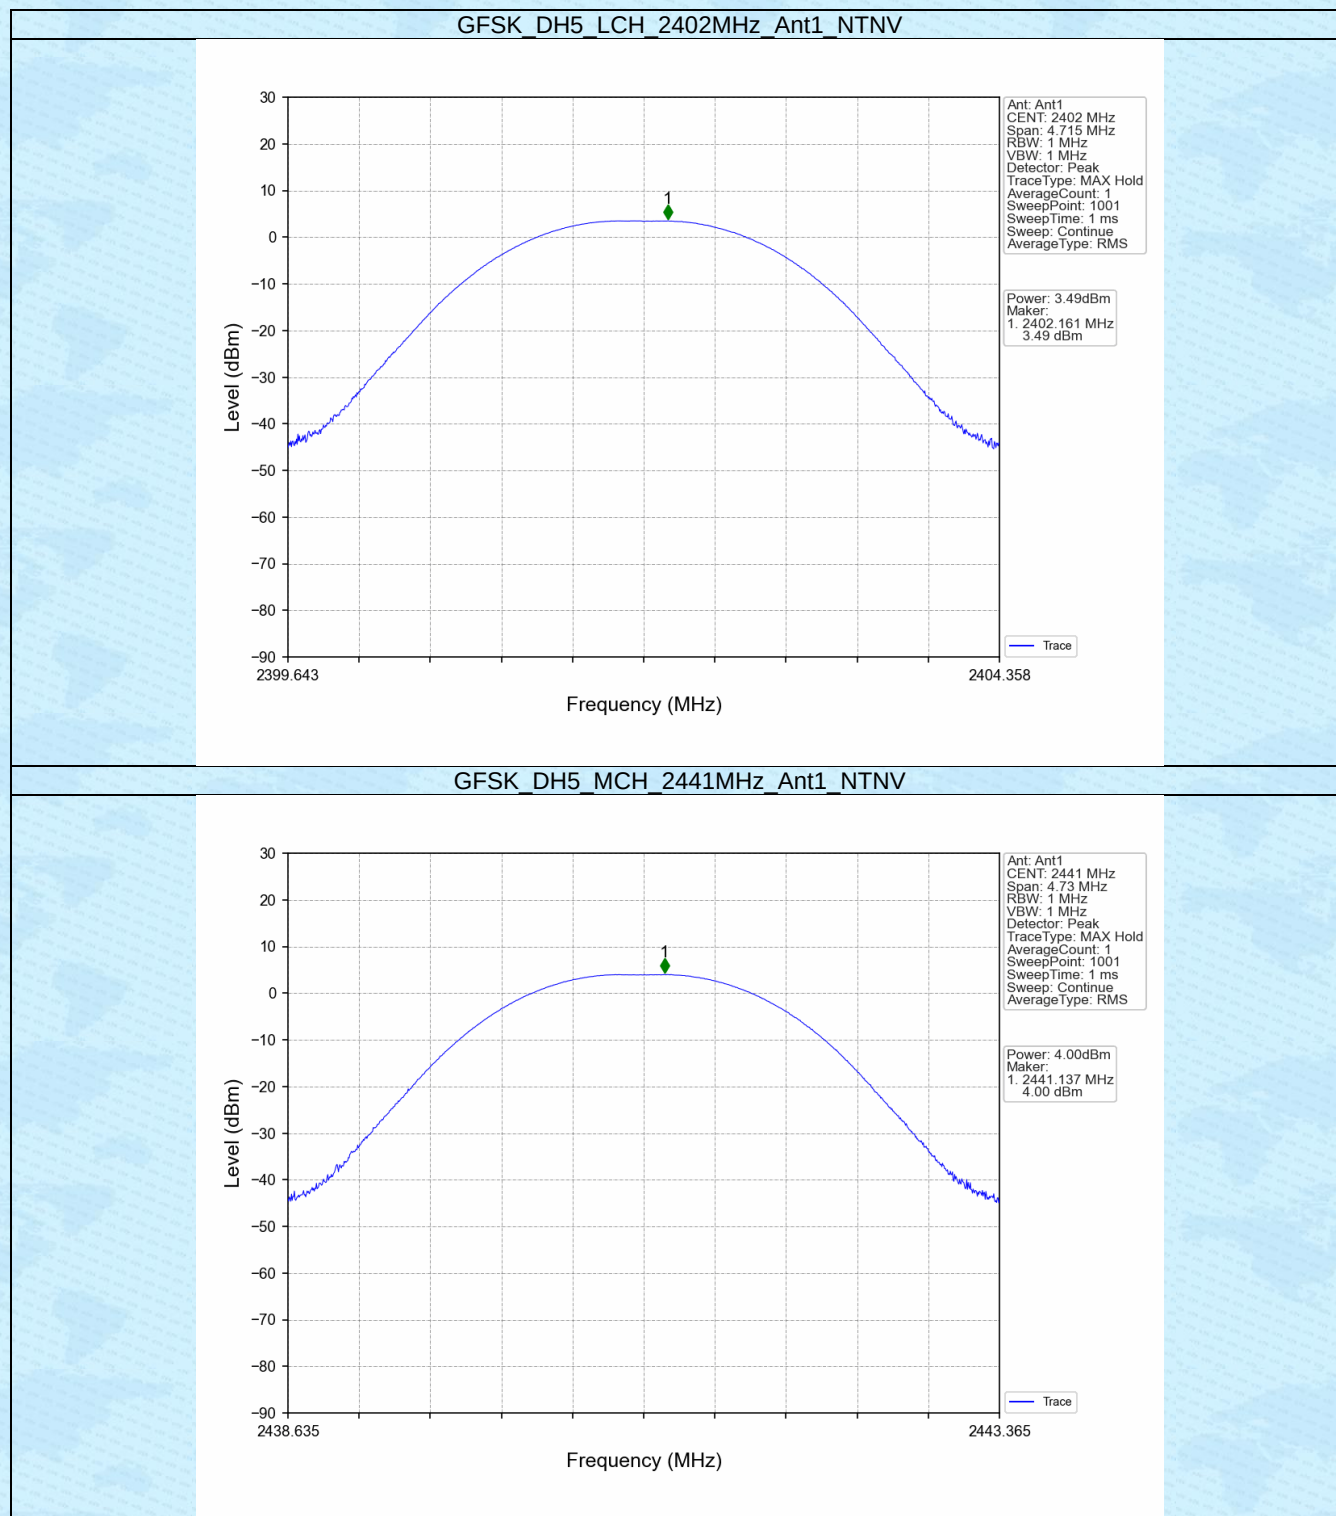


GFSK DH5_HCH_2480MHz_Ant1_NTNV

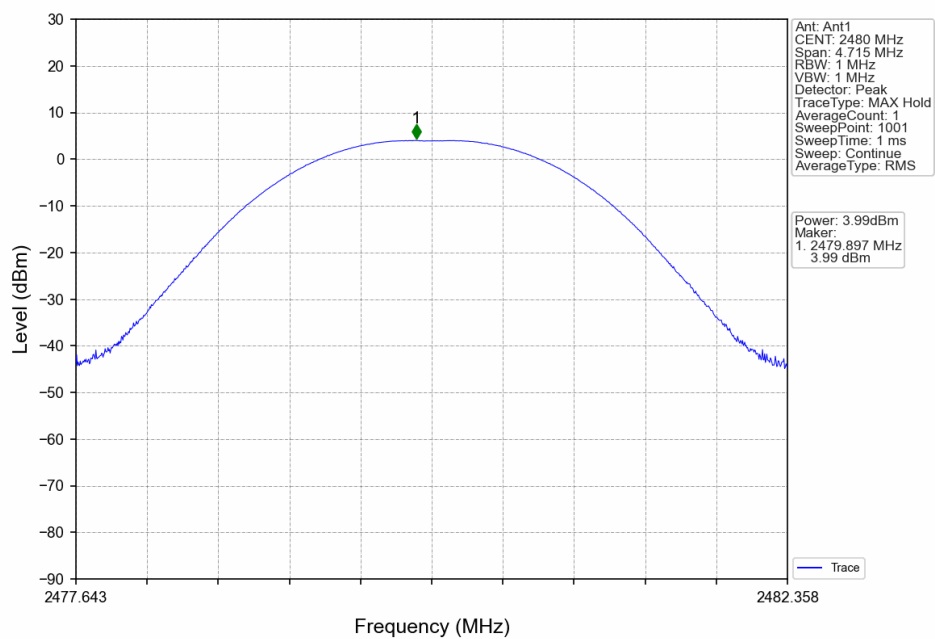


PI/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

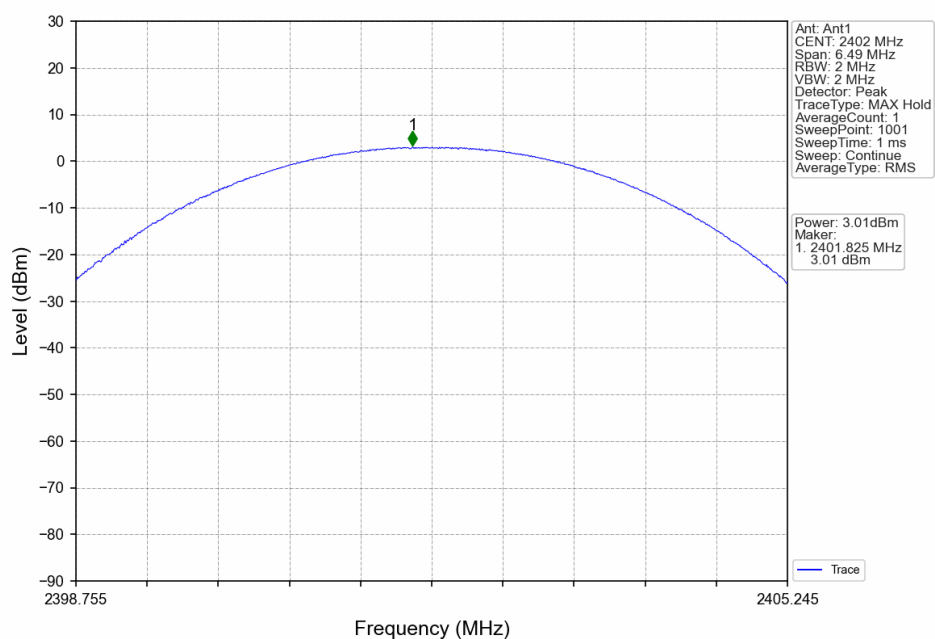


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

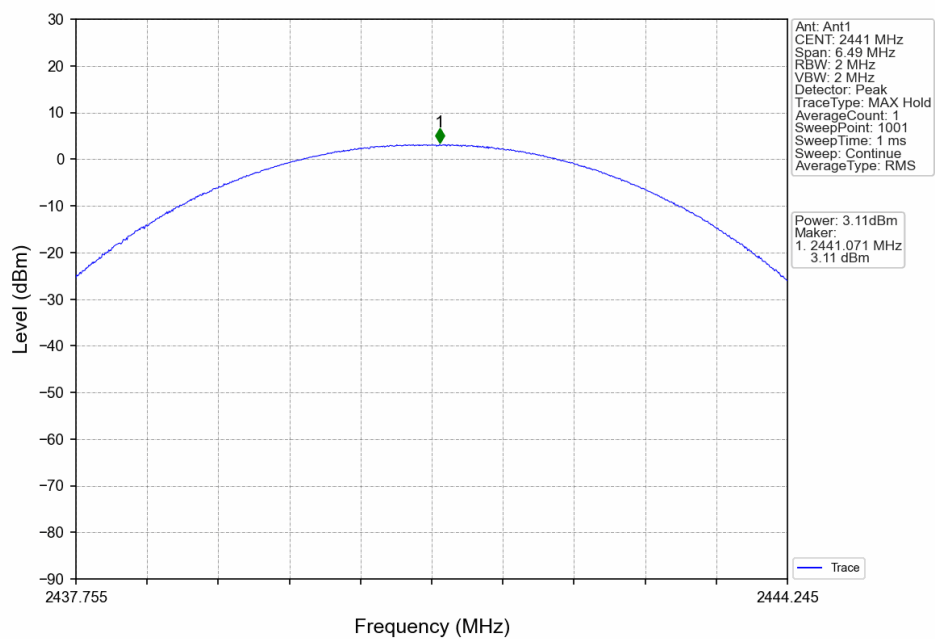


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

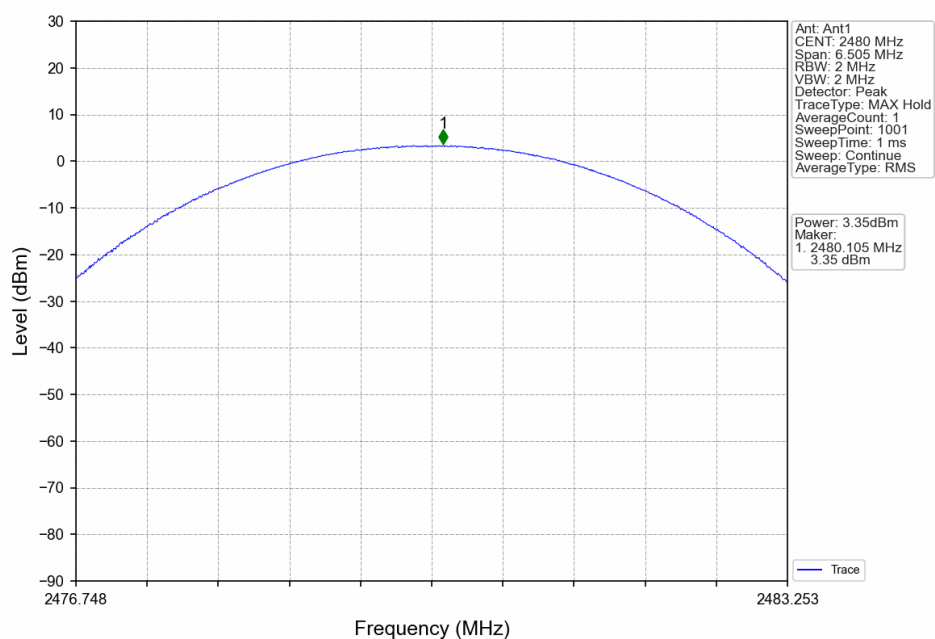


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

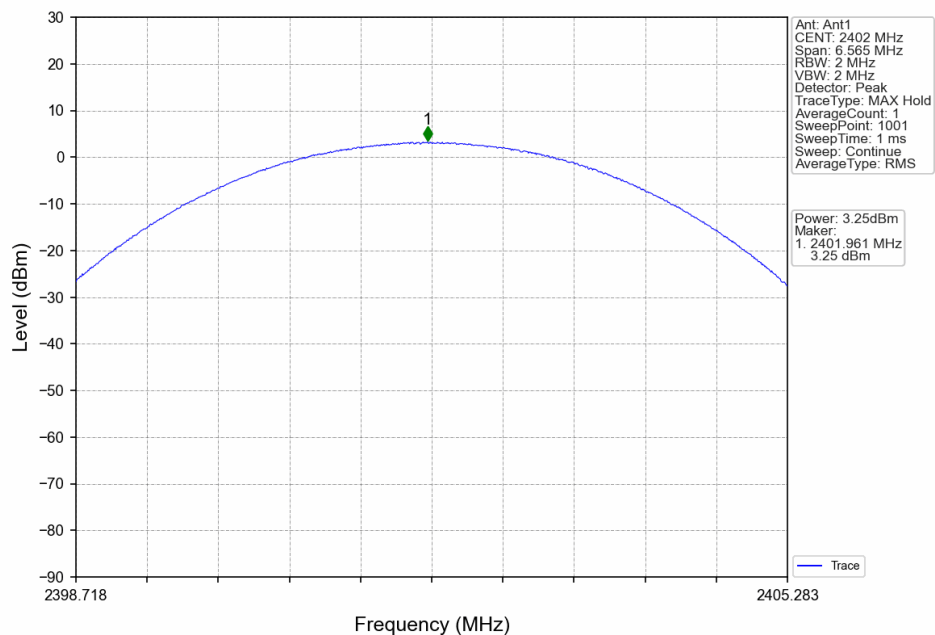

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

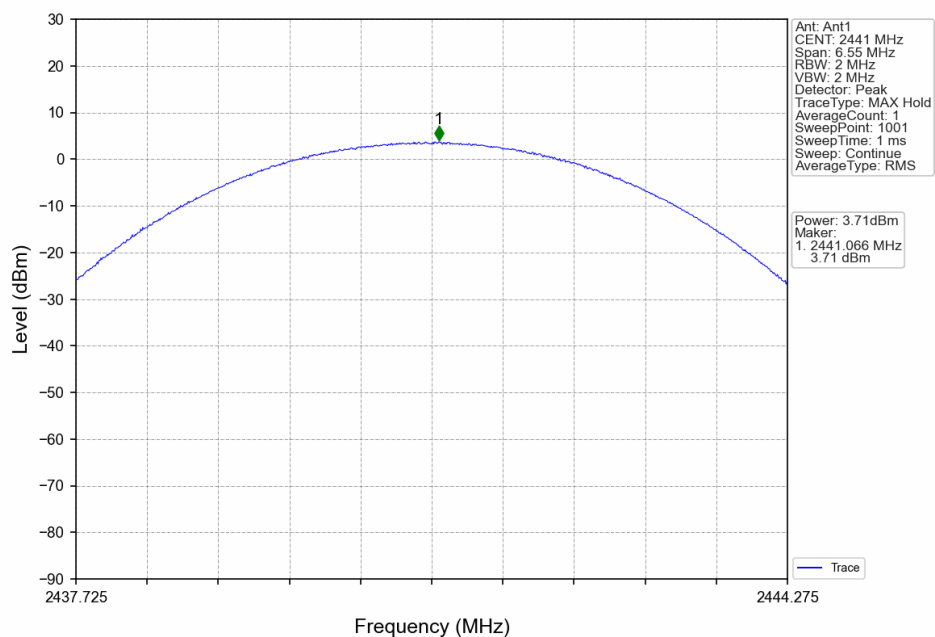

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

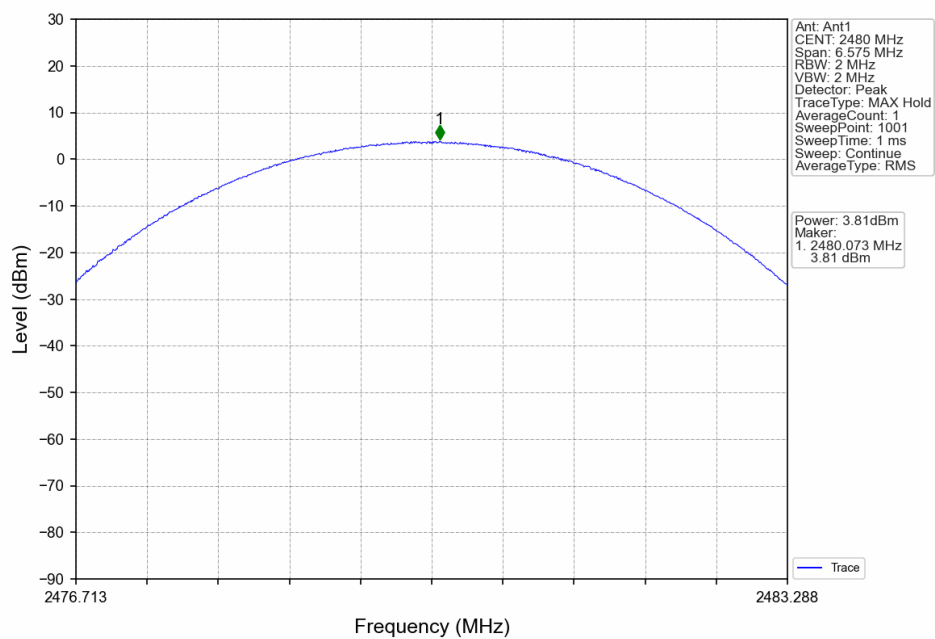


3. Carrier Frequency Separation


3.1 Ant1

3.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	1.024	0.946	≥ 0.946	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	0.991	1.301	≥ 0.867	Pass
8DPSK	SISO	HOPP	3DH5	1.001	1.315	≥ 0.877	Pass

3.1.2 Test Graph

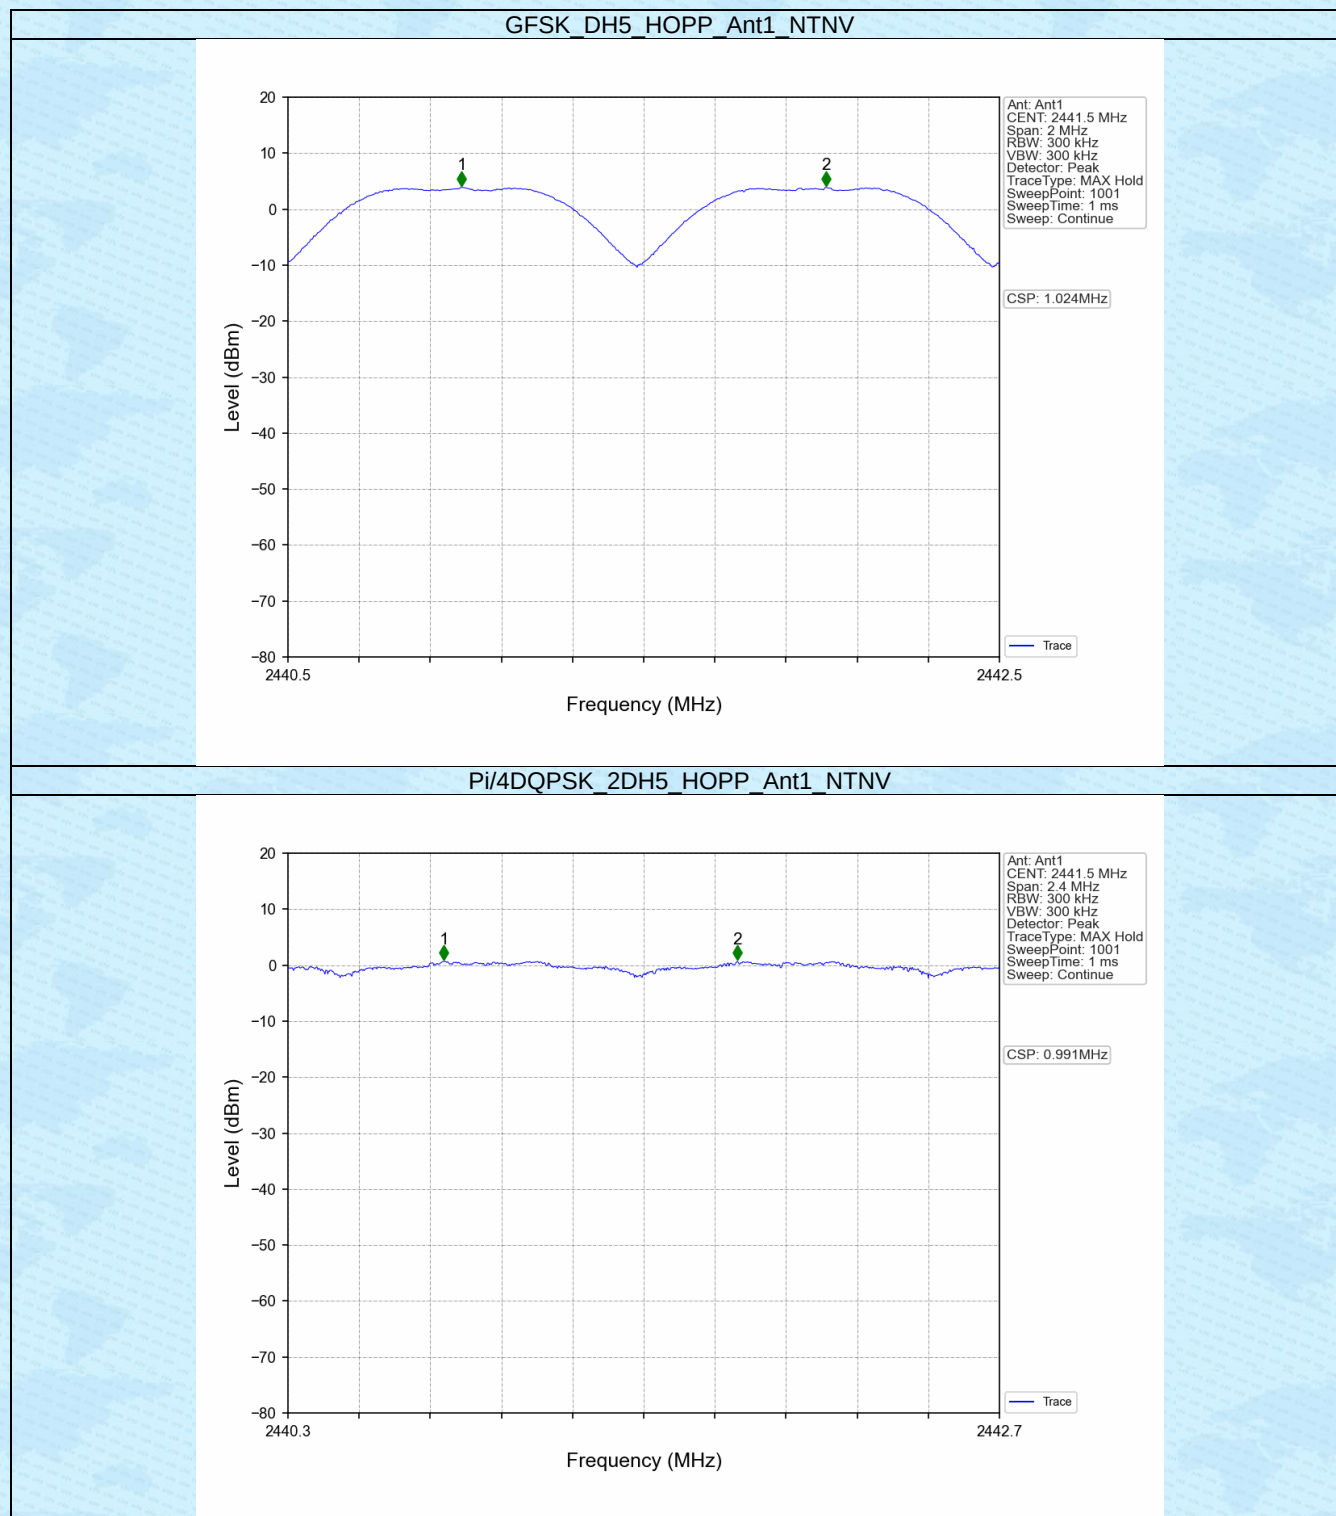

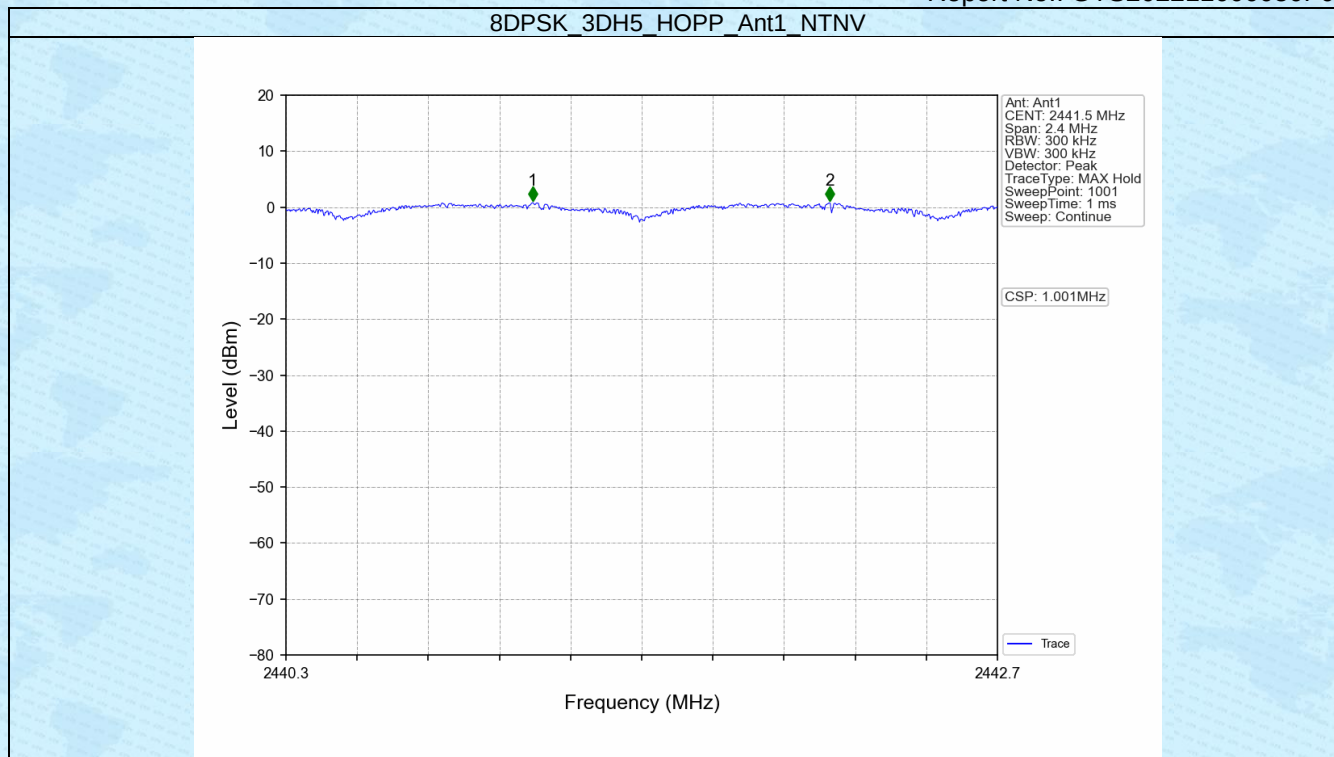


4. Number of Hopping Frequencies


4.1 HoppNum

4.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	≥ 15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	≥ 15	Pass
8DPSK	SISO	HOPP	3DH5	79	≥ 15	Pass

4.1.2 Test Graph

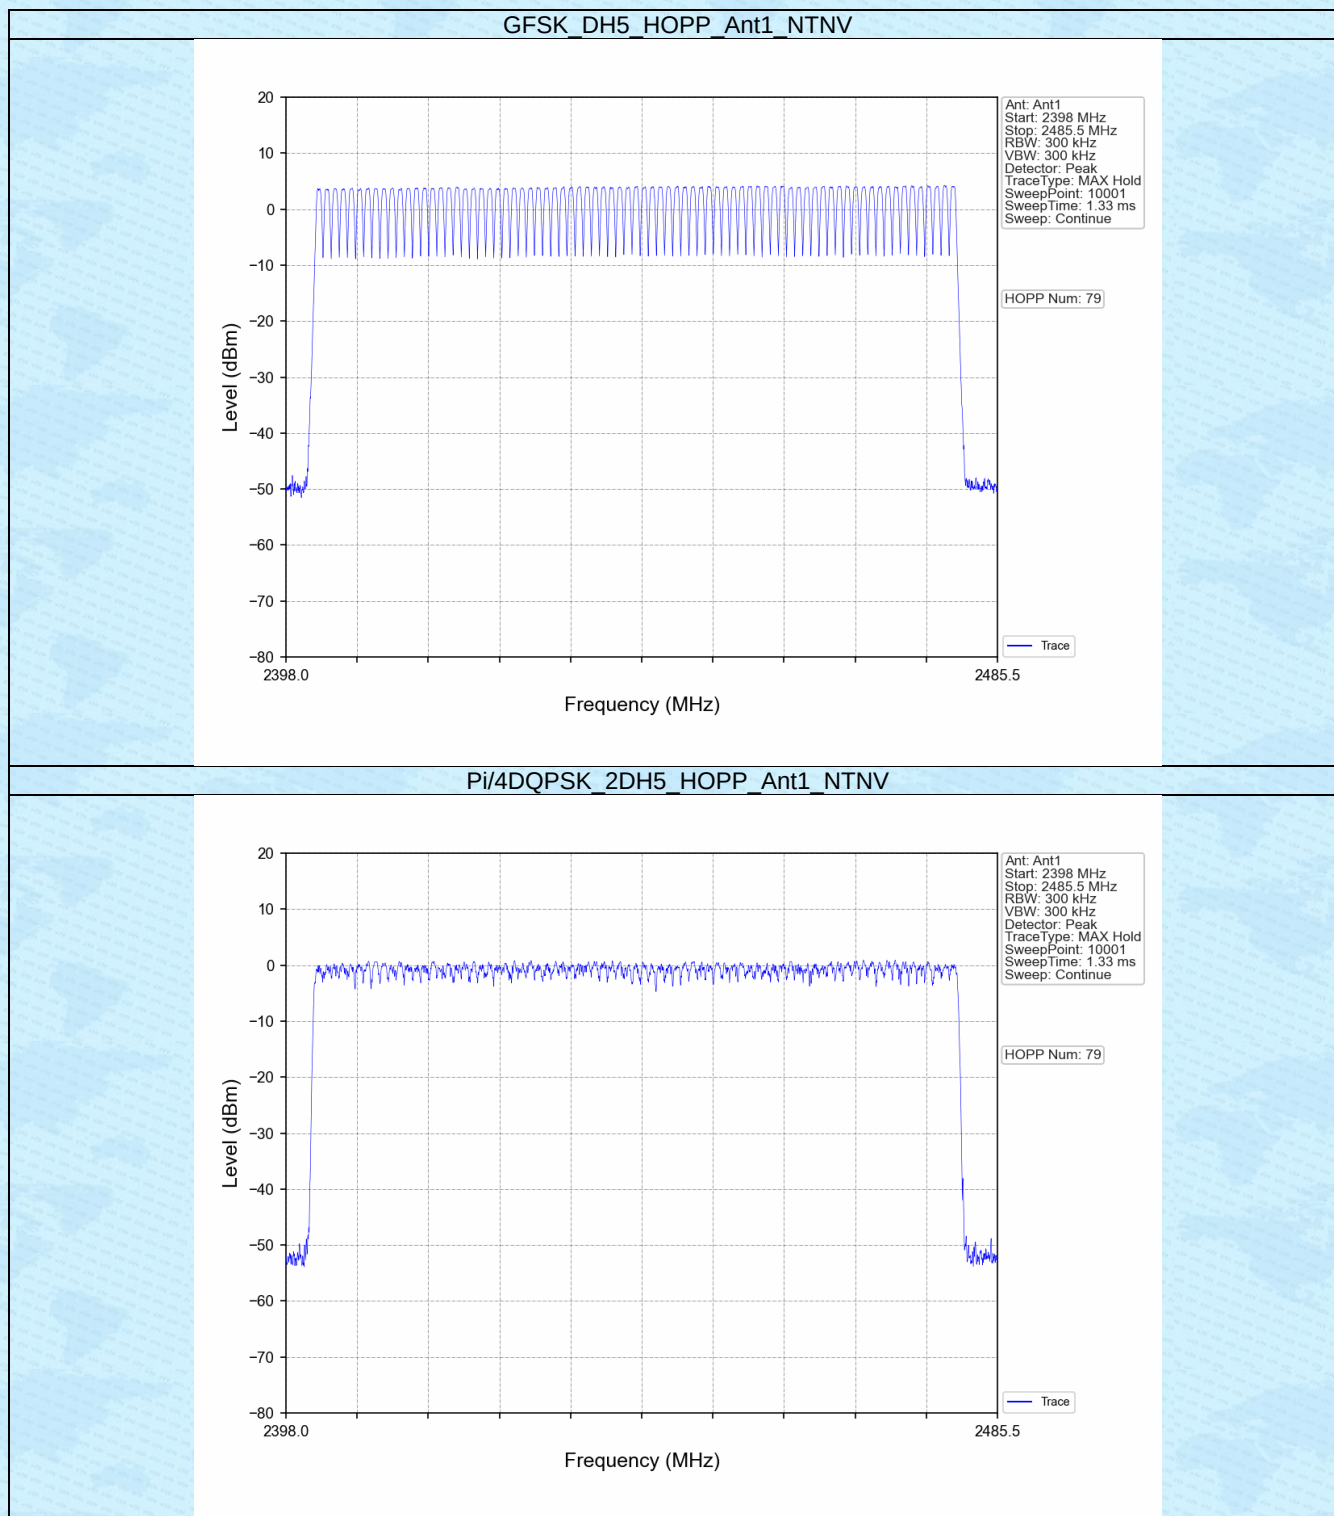

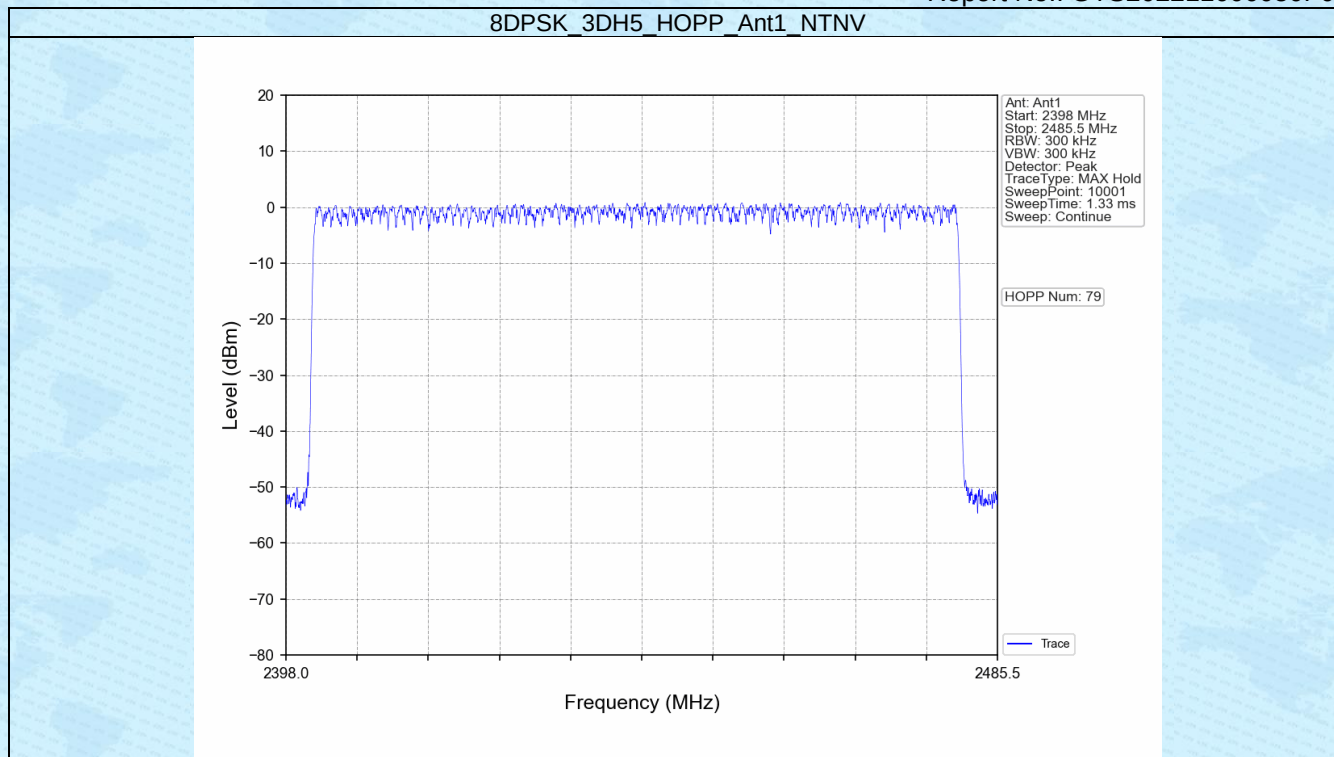


5. Time of Occupancy (Dwell Time)

5.1 Ant1


5.1.1 Test Result

Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.382	31.600	132	50.424	<=400	Pass
			DH3	1.640	31.600	112	183.680	<=400	Pass
			DH5	2.888	31.600	85	245.480	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH1	0.398	31.600	120	47.760	<=400	Pass
			2DH3	1.648	31.600	115	189.520	<=400	Pass
			2DH5	2.896	31.600	82	237.472	<=400	Pass
8DPSK	SISO	HOPP	3DH1	0.396	31.600	117	46.332	<=400	Pass
			3DH3	1.648	31.600	117	192.816	<=400	Pass
			3DH5	2.900	31.600	79	229.100	<=400	Pass


5.1.2 Test Graph

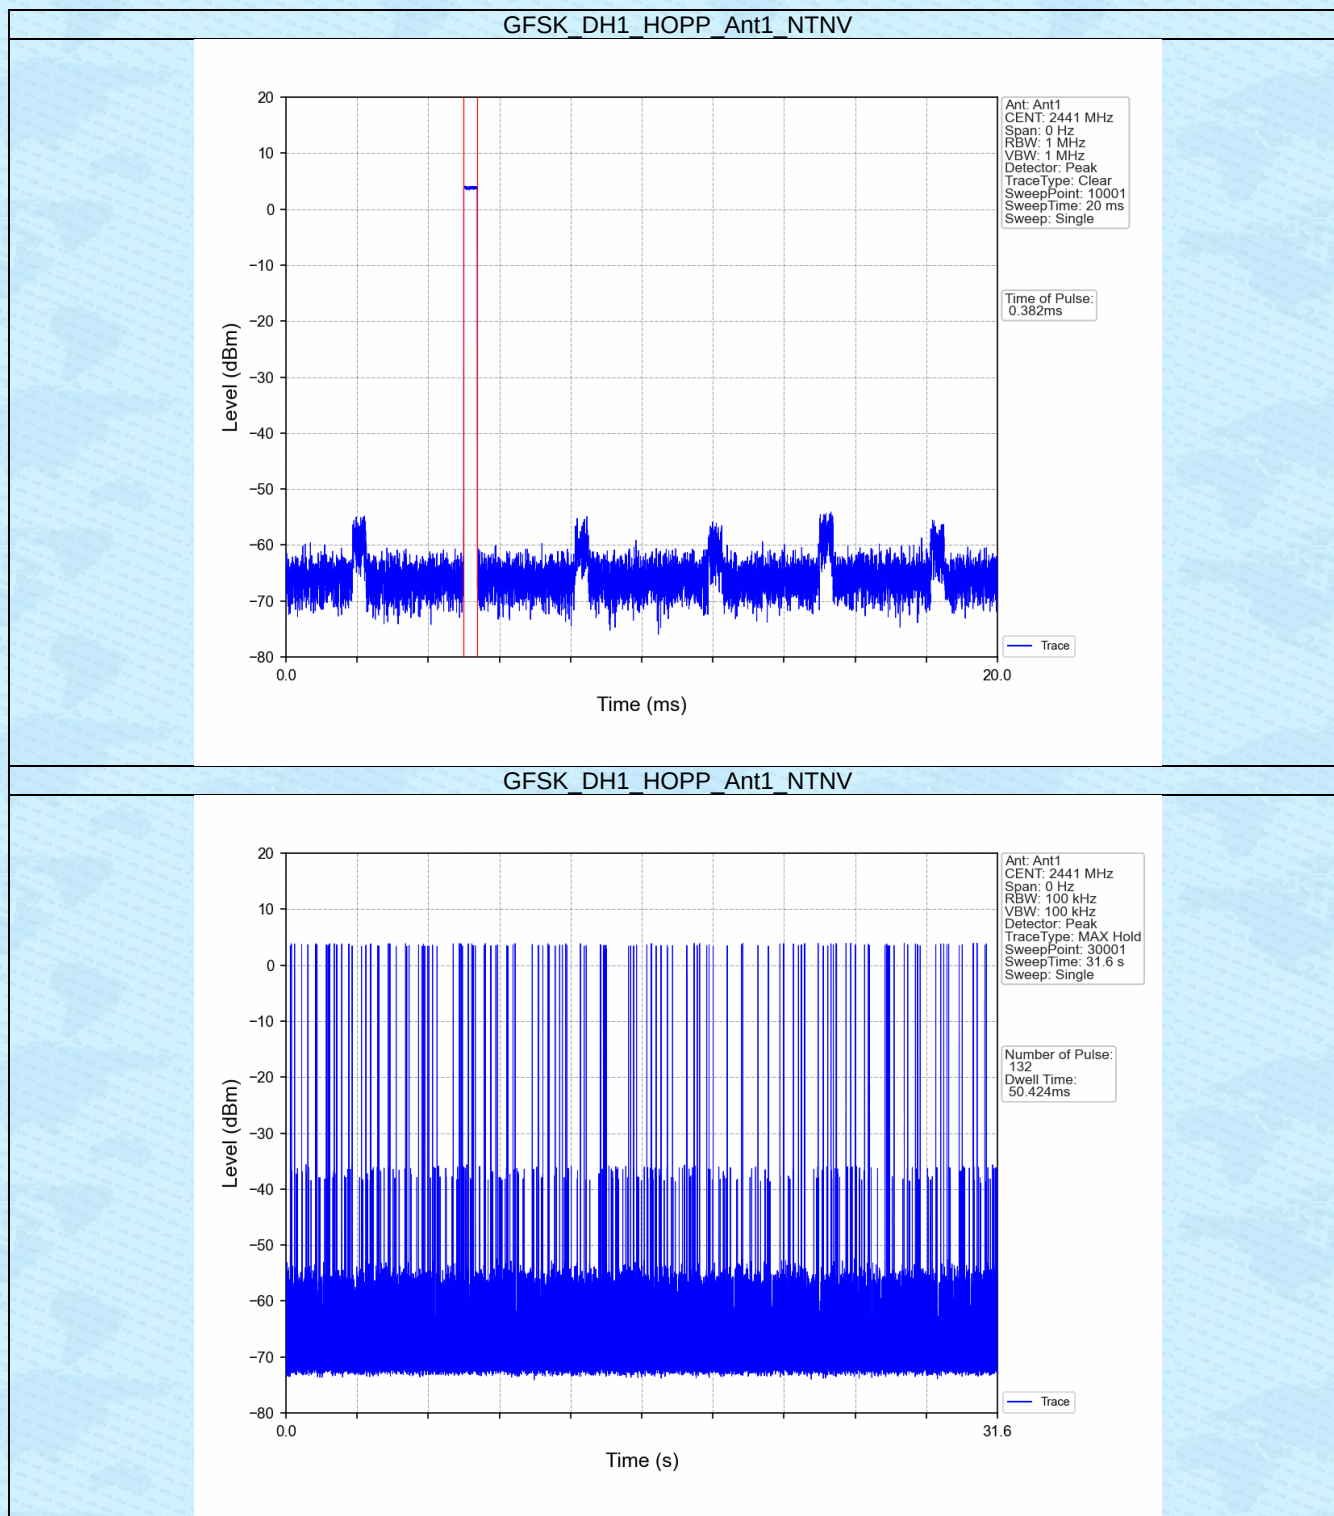


GFSK_DH3_HOPP_Ant1_NTNV

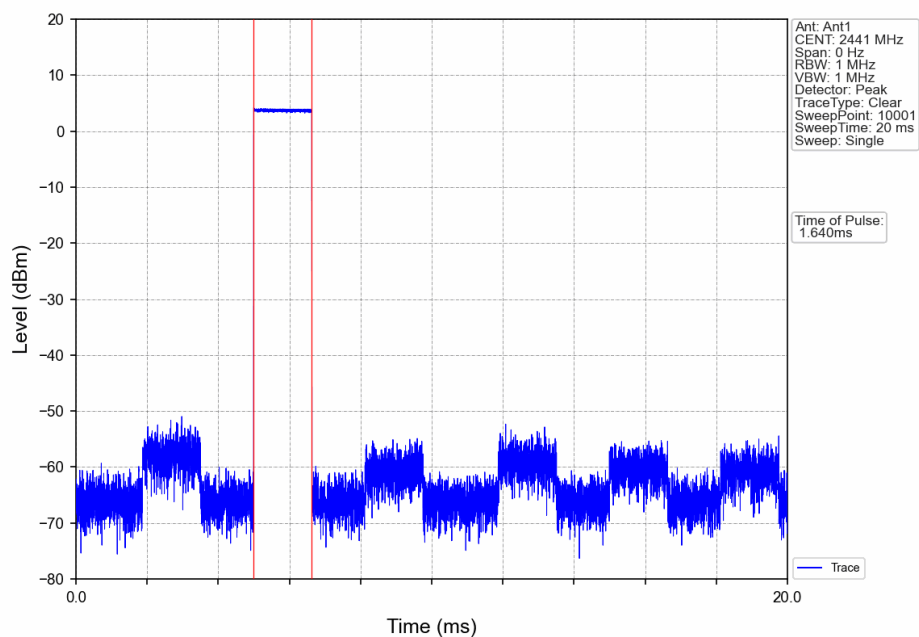


GFSK_DH3_HOPP_Ant1_NTNV

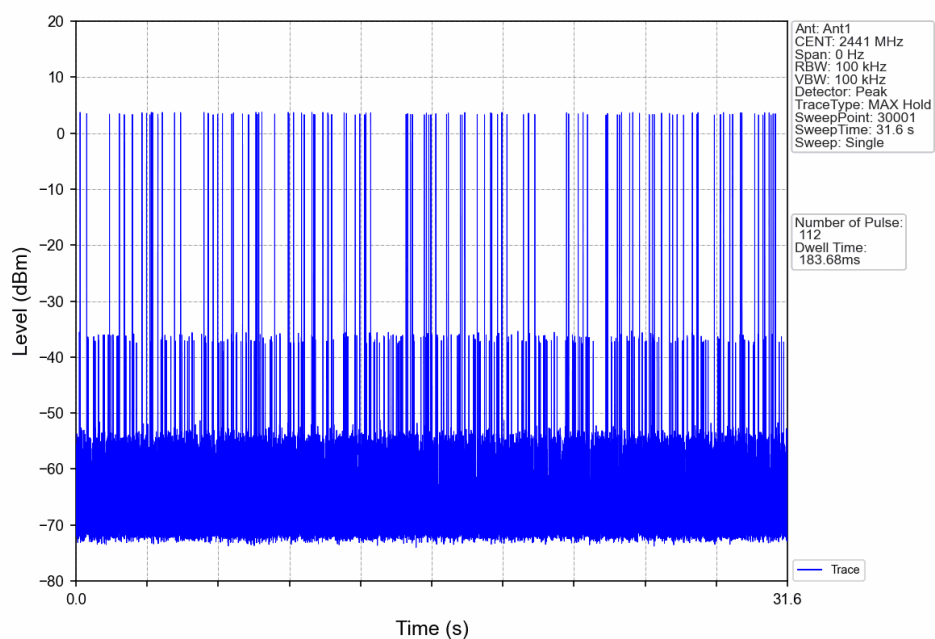


GFSK_DH5_HOPP_Ant1_NTNV

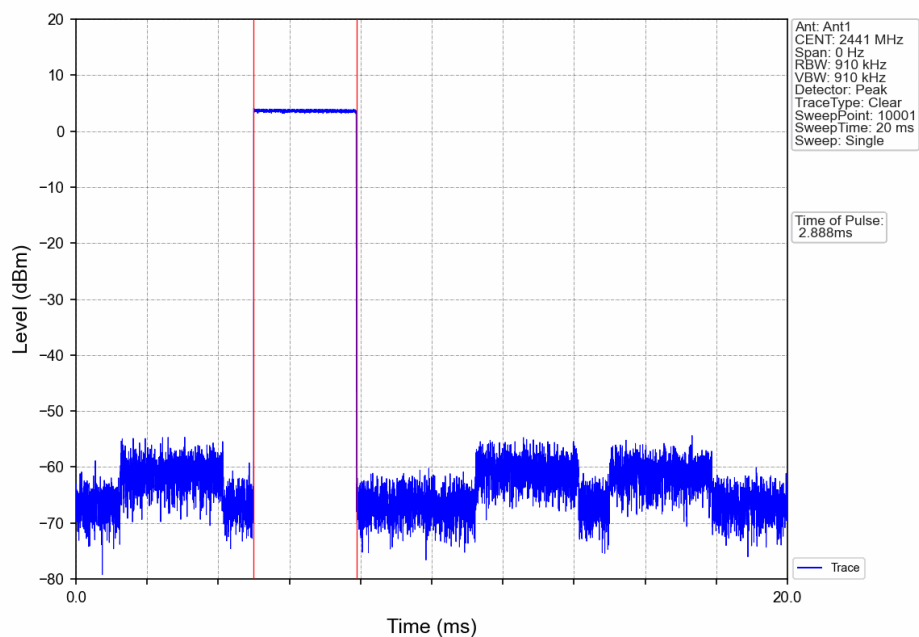


GFSK_DH5_HOPP_Ant1_NTNV

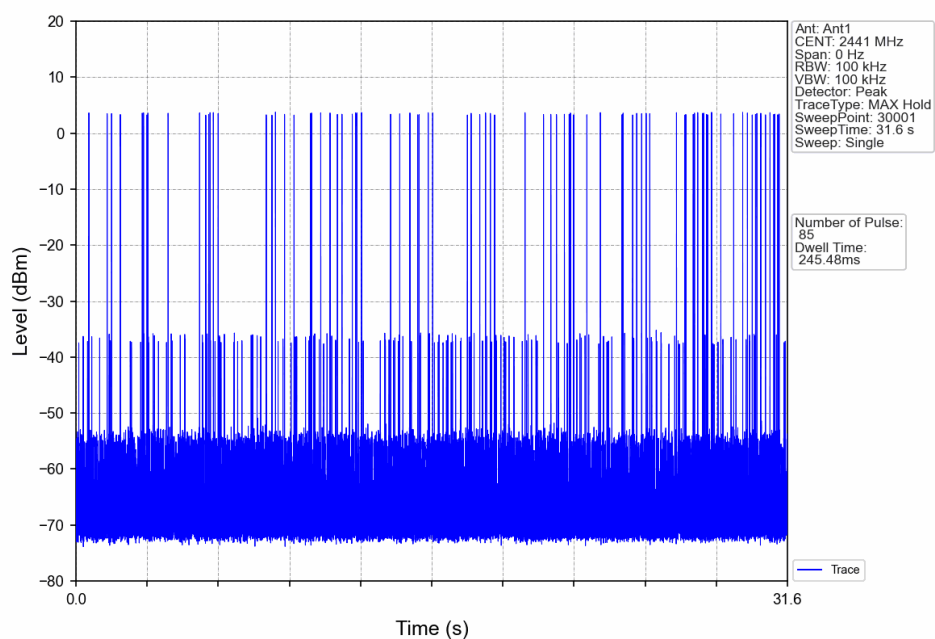


Pi/4DQPSK_2DH1_HOPP_Ant1_NTNV

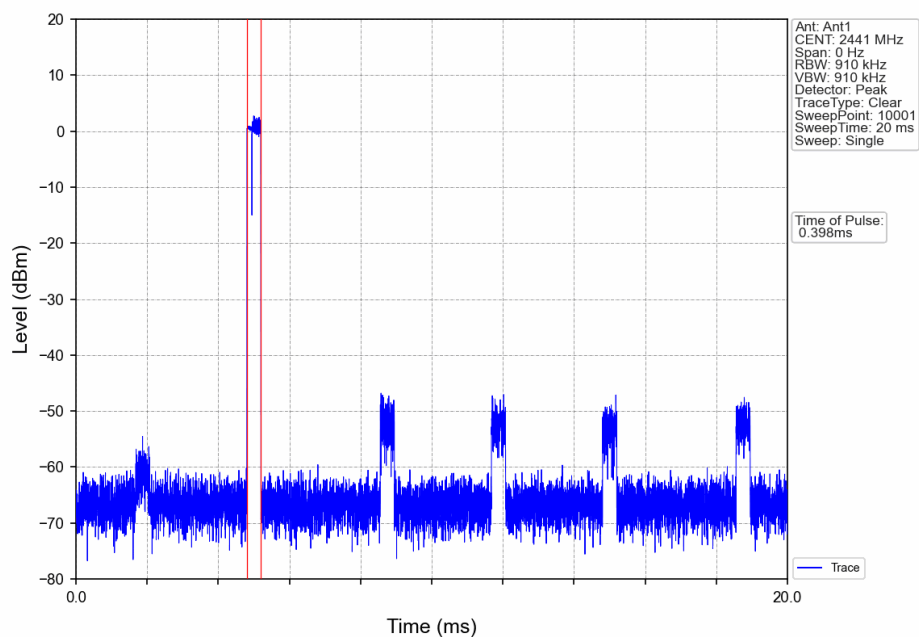


Pi/4DQPSK_2DH1_HOPP_Ant1_NTNV

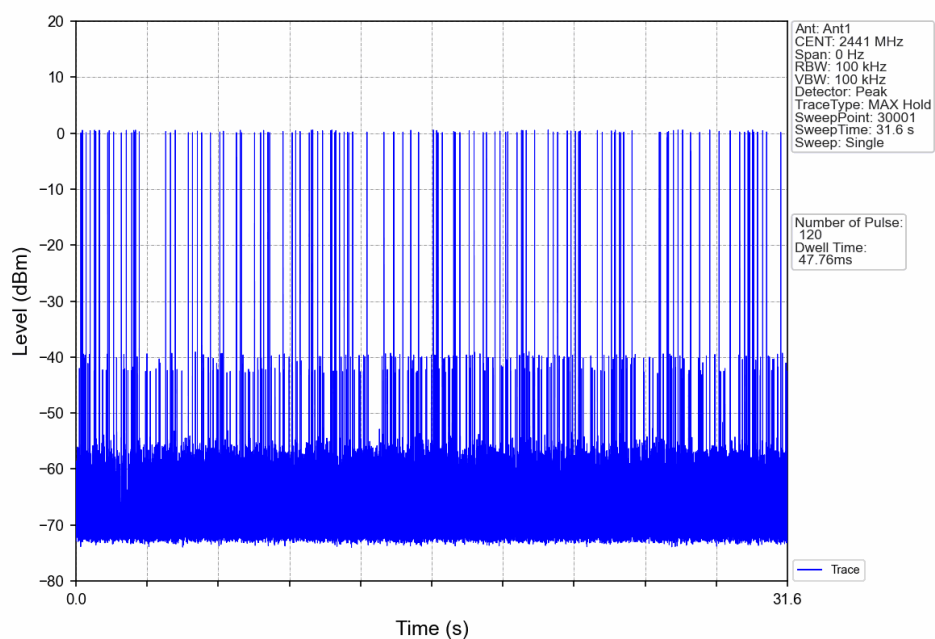


Pi/4DQPSK_2DH3_HOPP_Ant1_NTNV

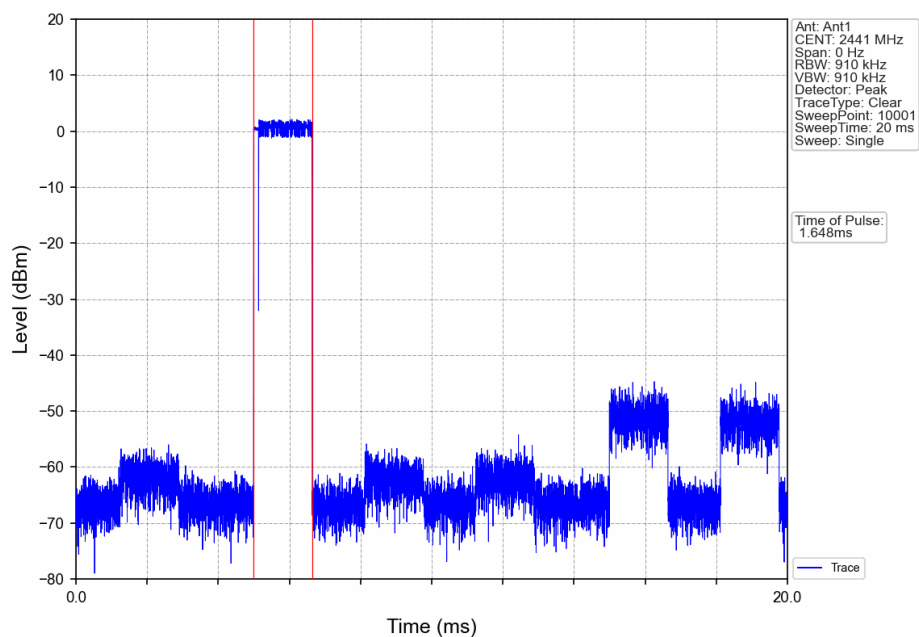


Pi/4DQPSK_2DH3_HOPP_Ant1_NTNV

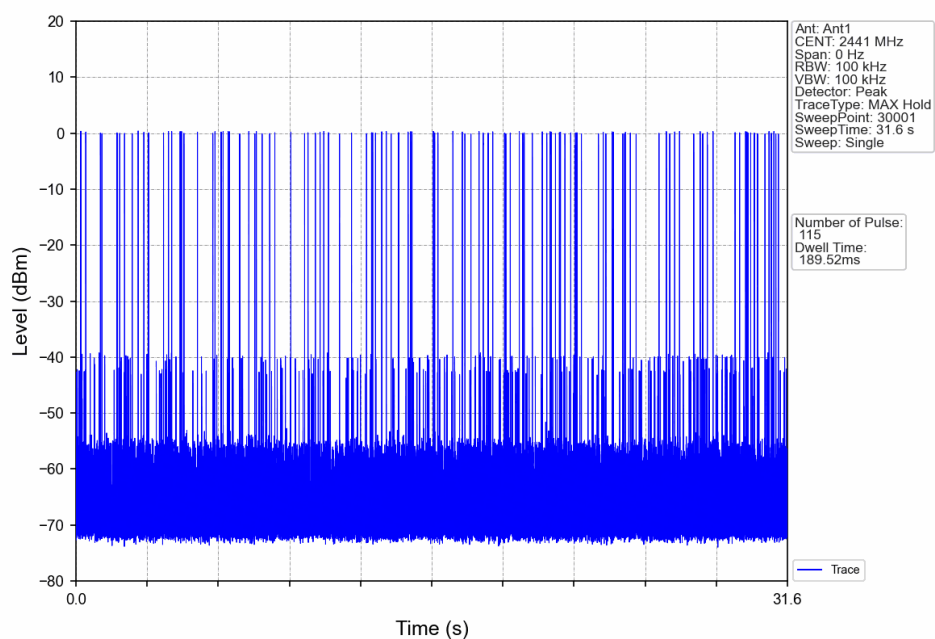


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

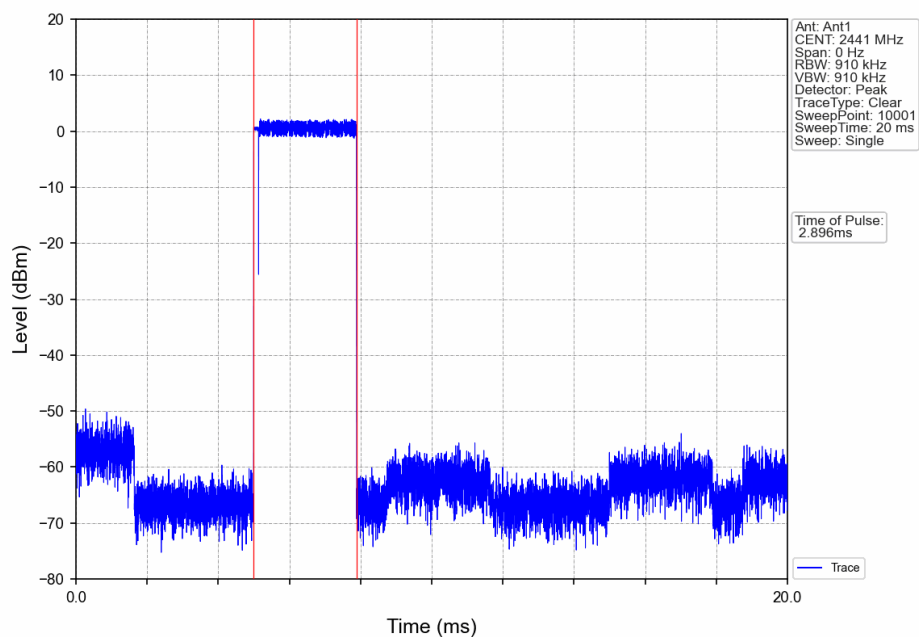


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

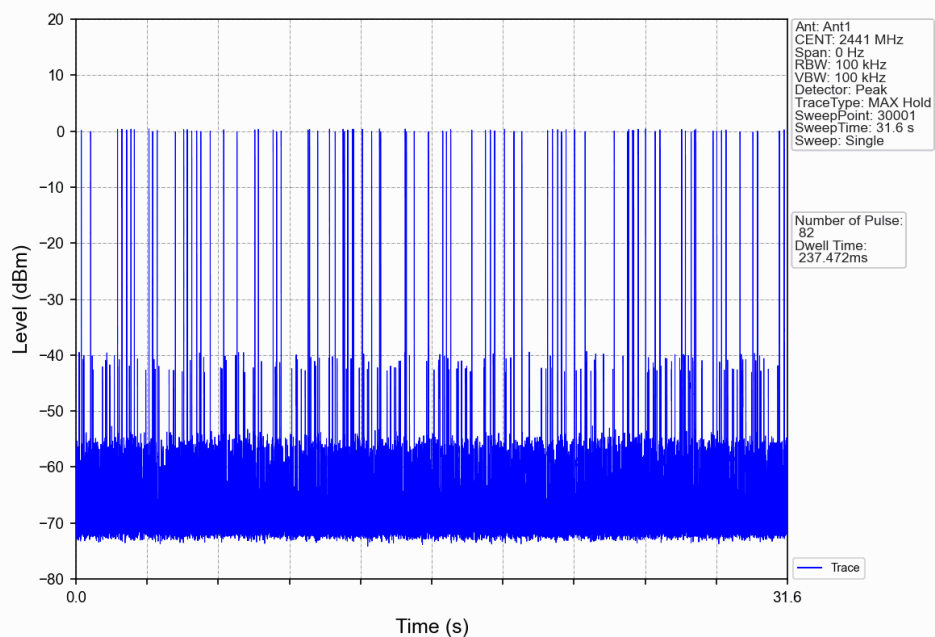


8DPSK_3DH1_HOPP_Ant1_NTNV

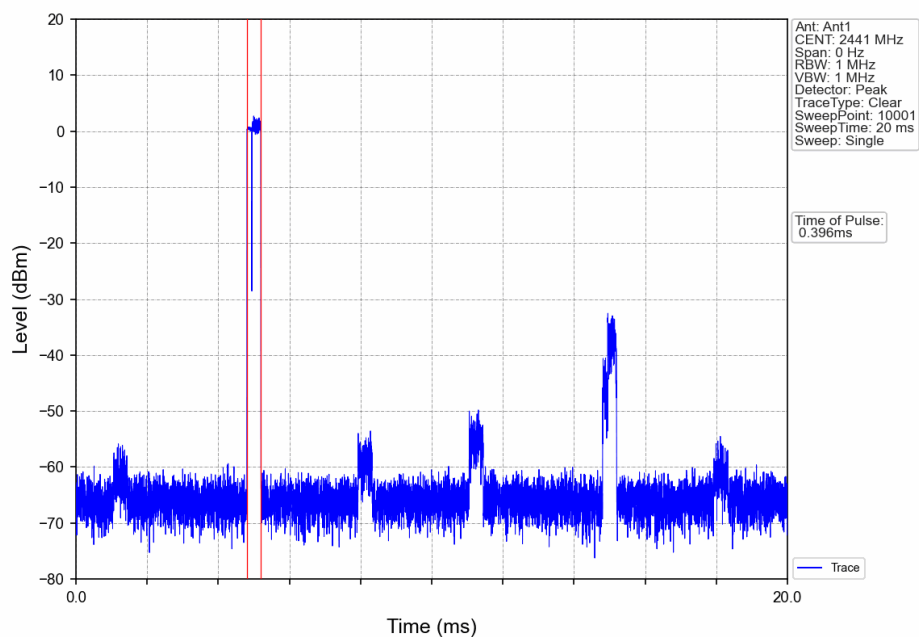


8DPSK_3DH1_HOPP_Ant1_NTNV

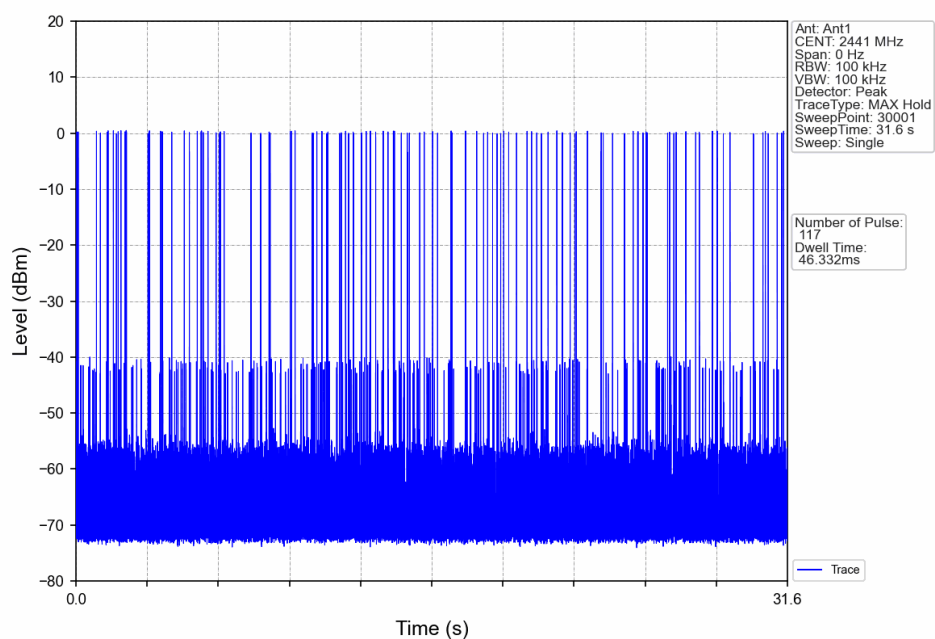


8DPSK_3DH3_HOPP_Ant1_NTNV

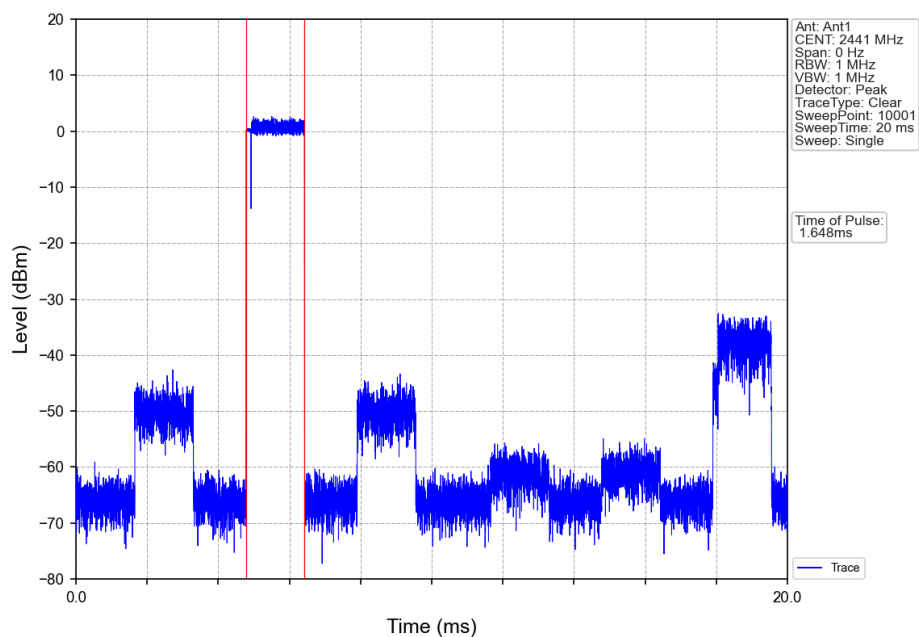


8DPSK_3DH3_HOPP_Ant1_NTNV

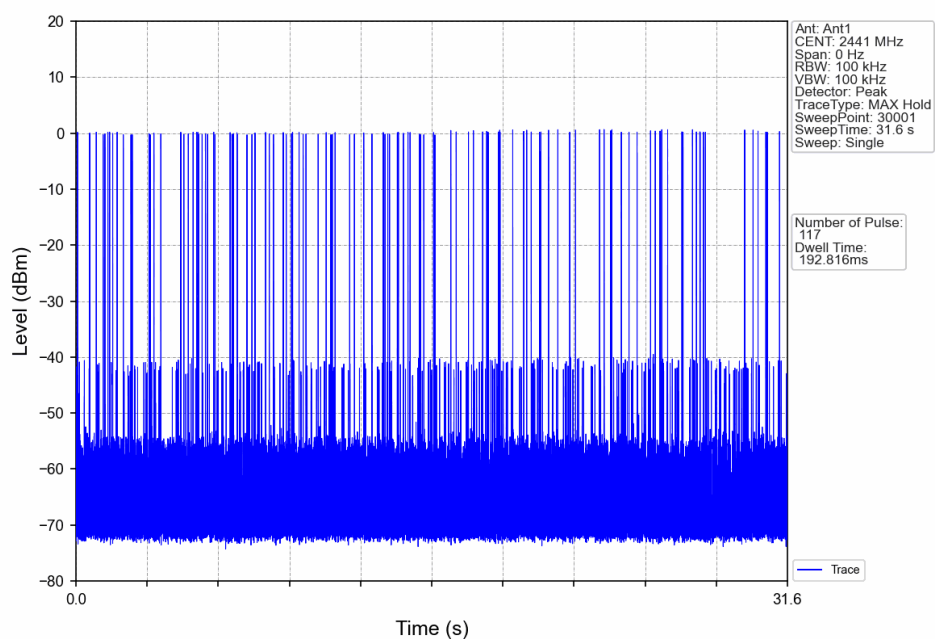

8DPSK_3DH5_HOPP_Ant1_NTNV

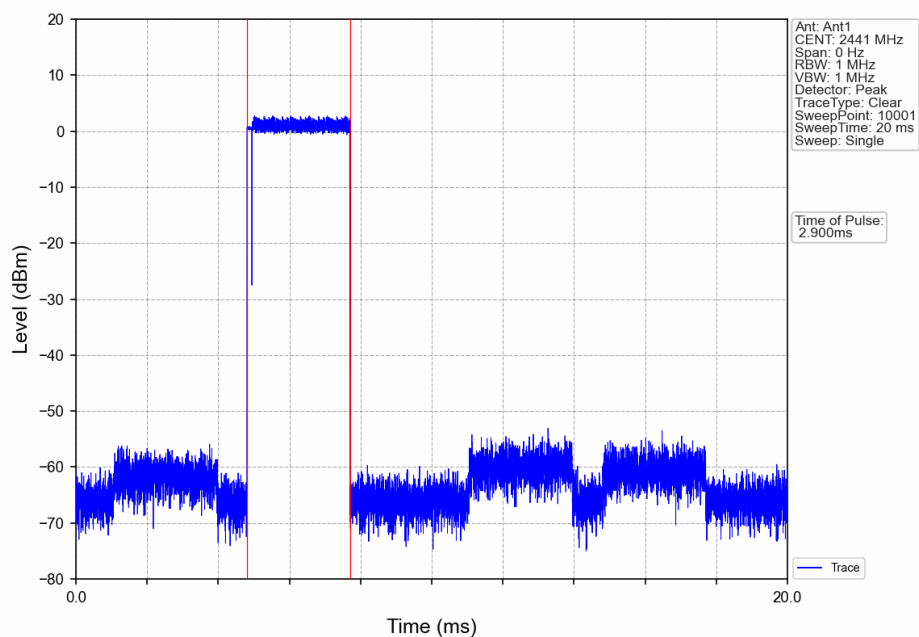

8DPSK_3DH5_HOPP_Ant1_NTNV

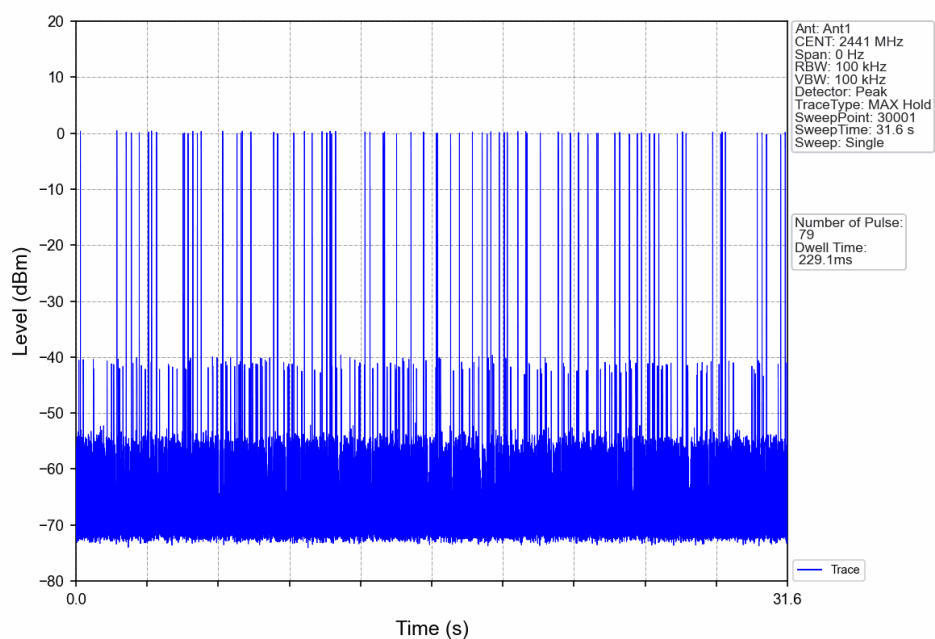

6. Unwanted Emissions In Non-restricted Frequency Bands


6.1 Ref

6.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	3.35
		2441	DH5	1	3.61
		2480	DH5	1	3.55
Pi/4DQPSK	SISO	2402	2DH5	1	0.28
		2441	2DH5	1	0.08
		2480	2DH5	1	0.77
8DPSK	SISO	2402	3DH5	1	0.26
		2441	3DH5	1	0.30
		2480	3DH5	1	0.75

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


6.1.2 Test Graph

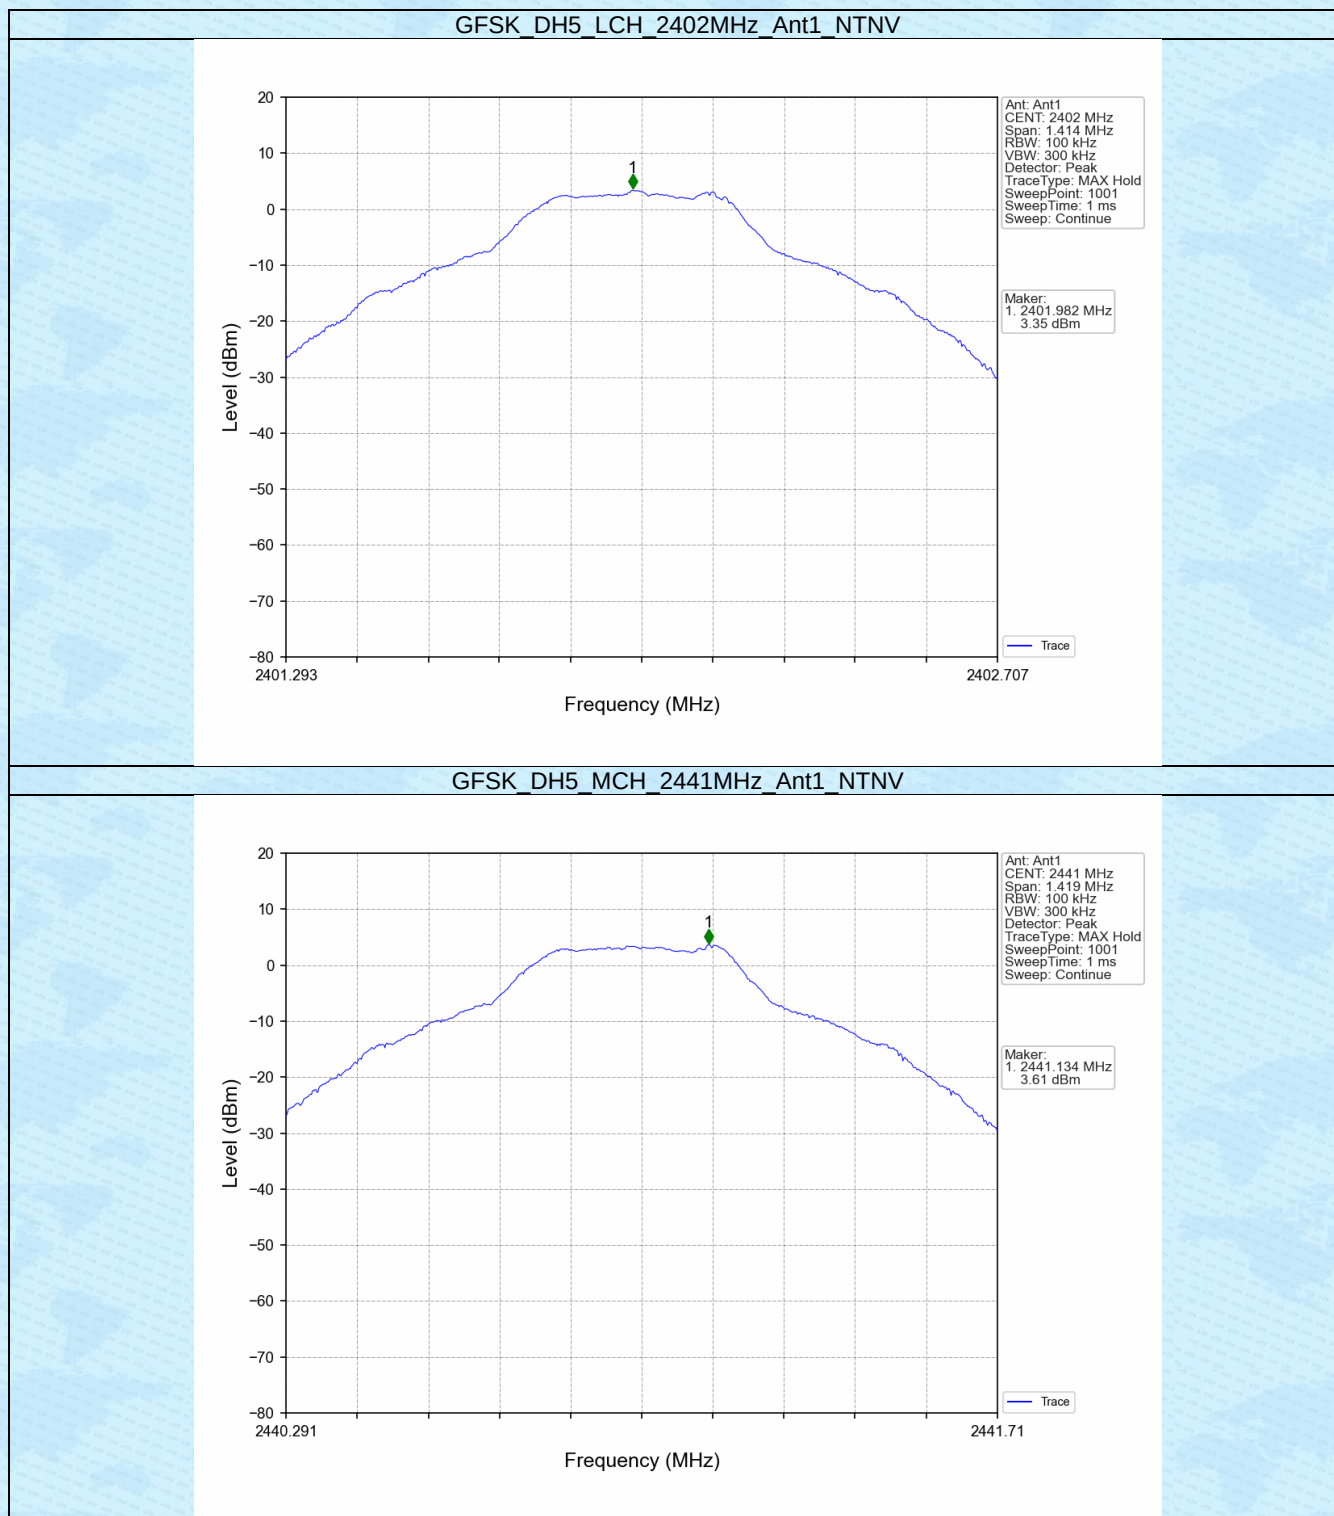


GFSK DH5_HCH_2480MHz_Ant1_NTNV

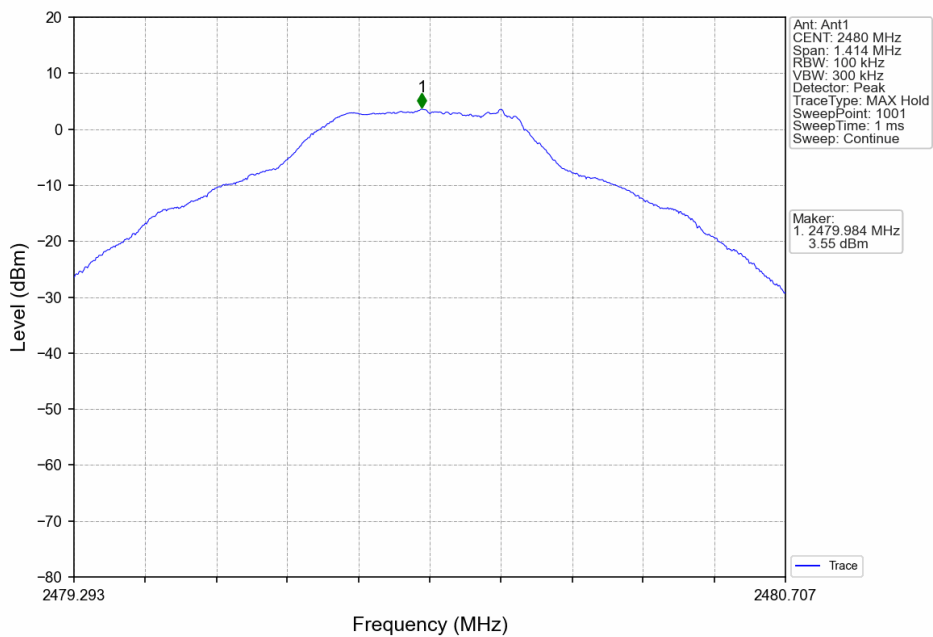


PI/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

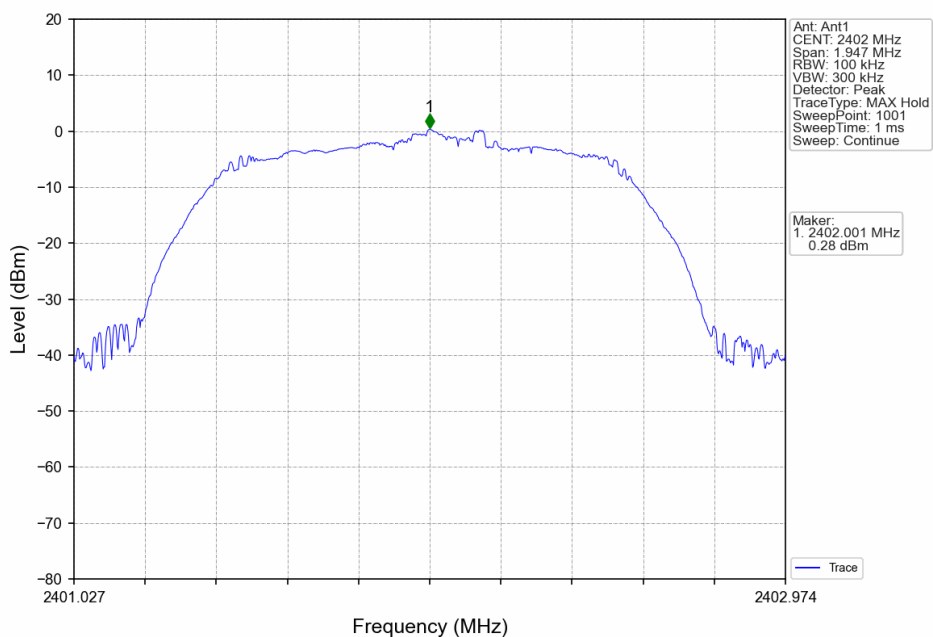


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

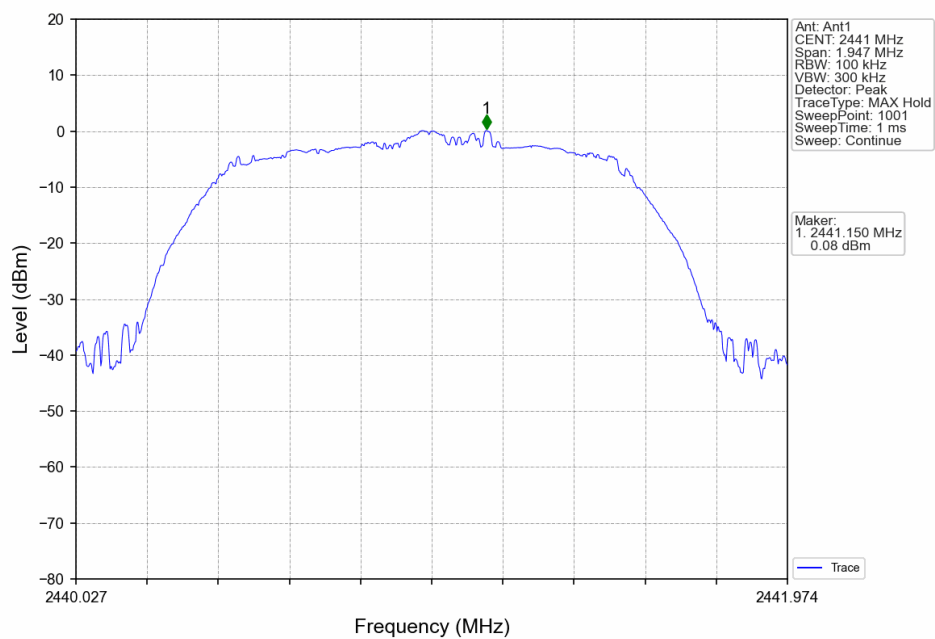


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

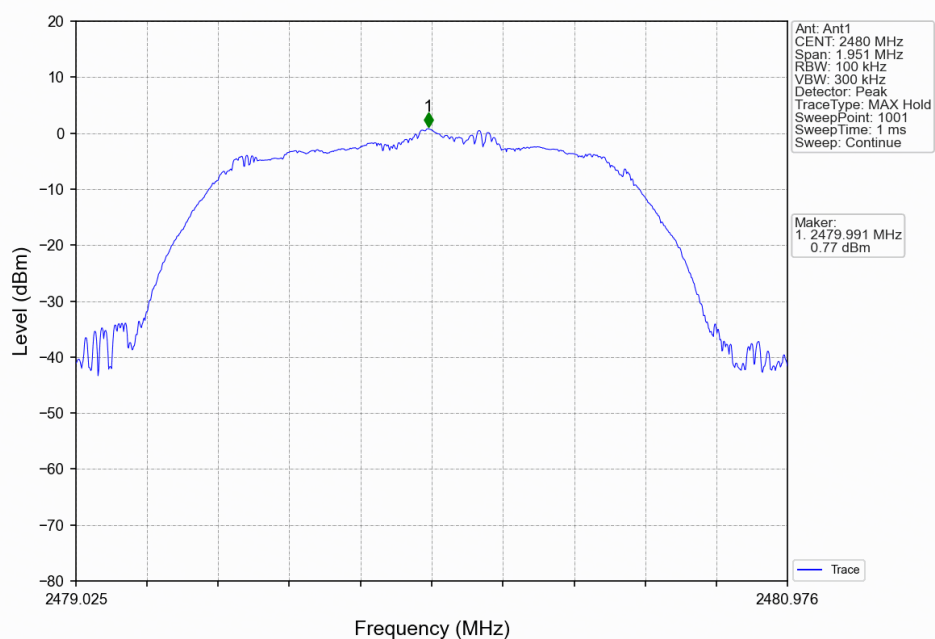


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

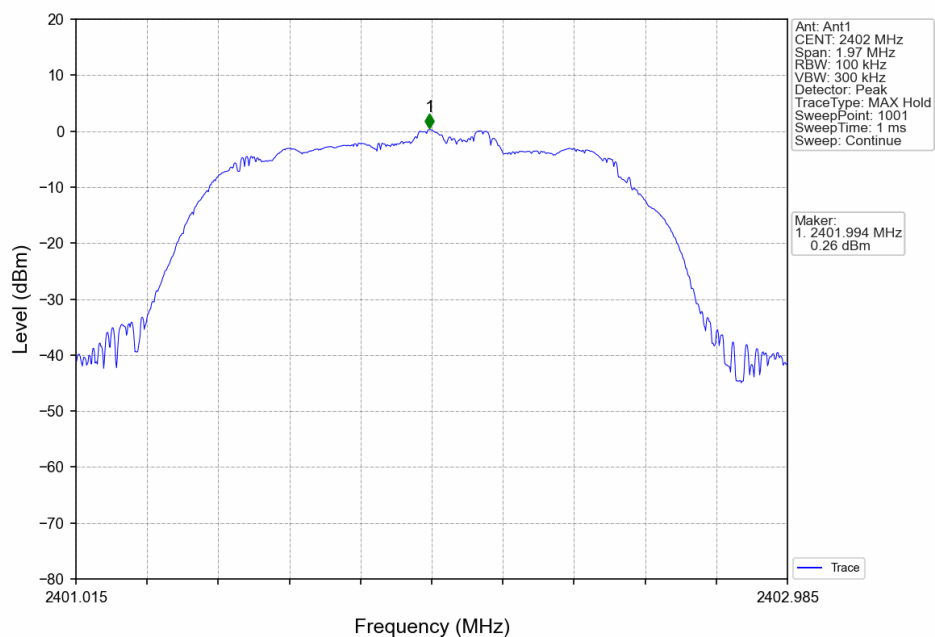

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

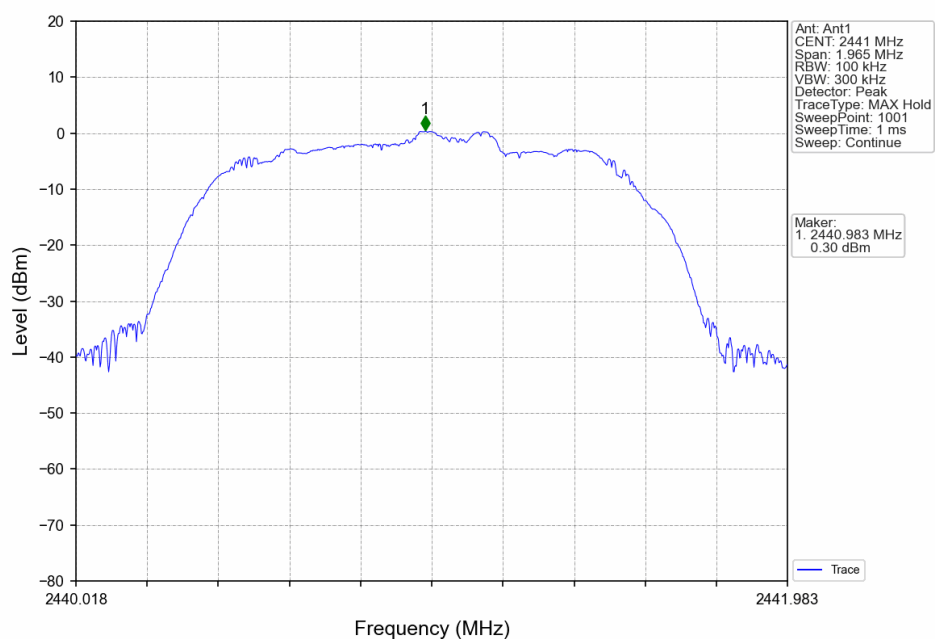

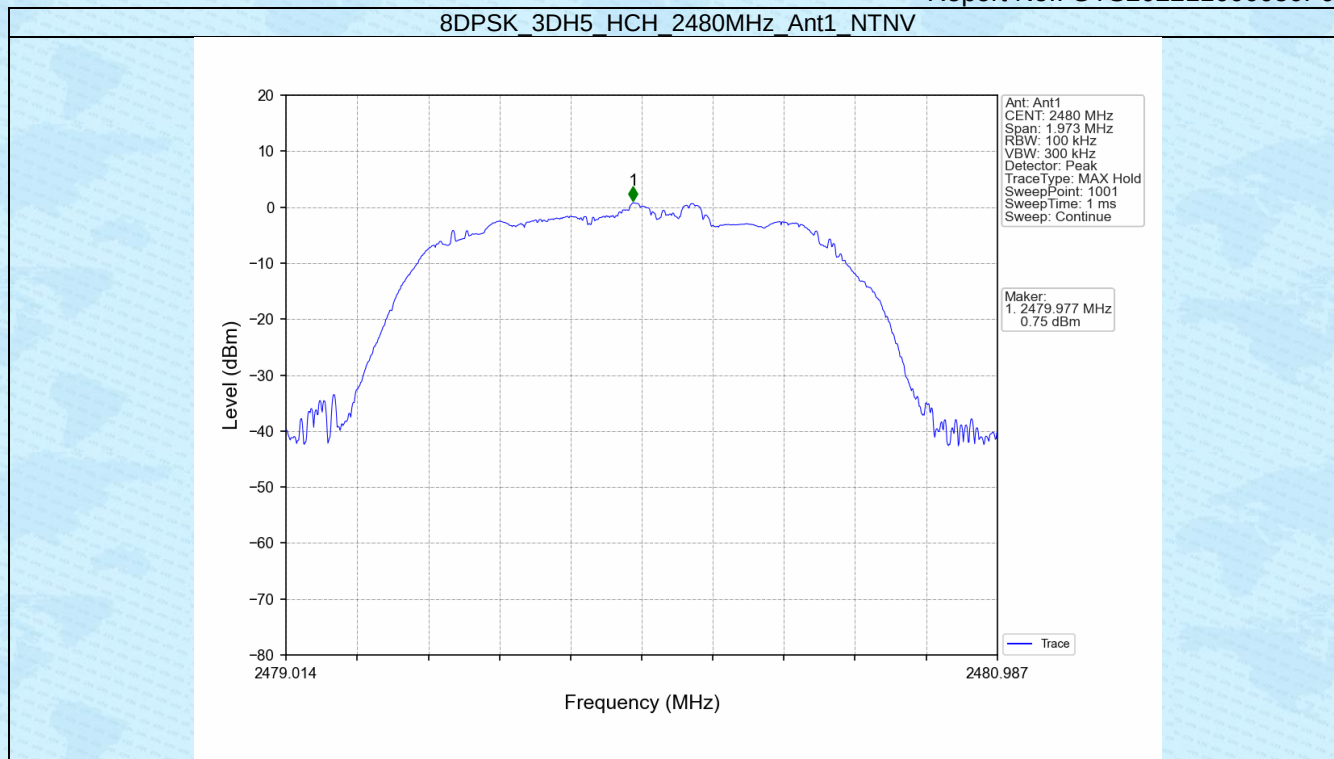


6.2 CSE


6.2.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	3.61	-16.39	Pass
		2441	DH5	1	3.61	-16.39	Pass
		2480	DH5	1	3.61	-16.39	Pass
		HOPP	DH5	1	3.61	-16.39	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	0.77	-19.23	Pass
		2441	2DH5	1	0.77	-19.23	Pass
		2480	2DH5	1	0.77	-19.23	Pass
		HOPP	2DH5	1	0.77	-19.23	Pass
8DPSK	SISO	2402	3DH5	1	0.75	-19.25	Pass
		2441	3DH5	1	0.75	-19.25	Pass
		2480	3DH5	1	0.75	-19.25	Pass
		HOPP	3DH5	1	0.75	-19.25	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.							


6.2.2 Test Graph

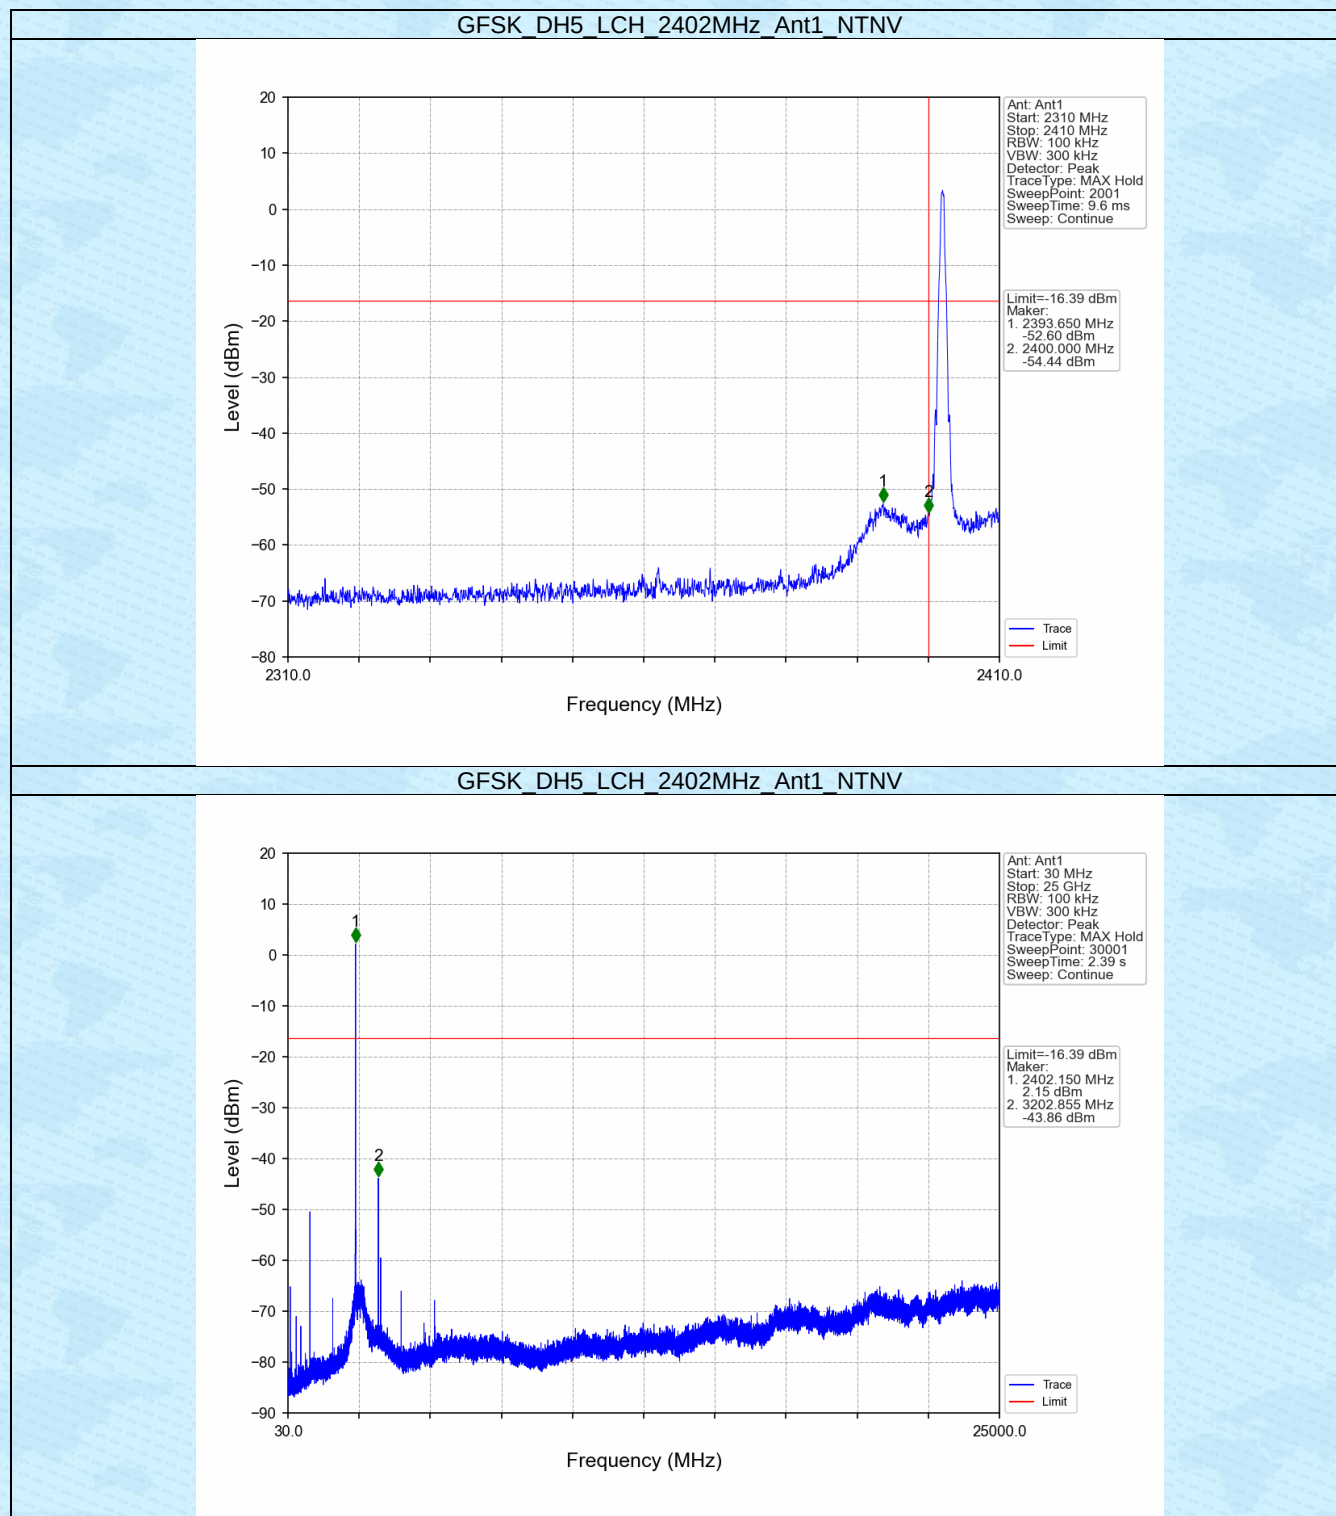


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

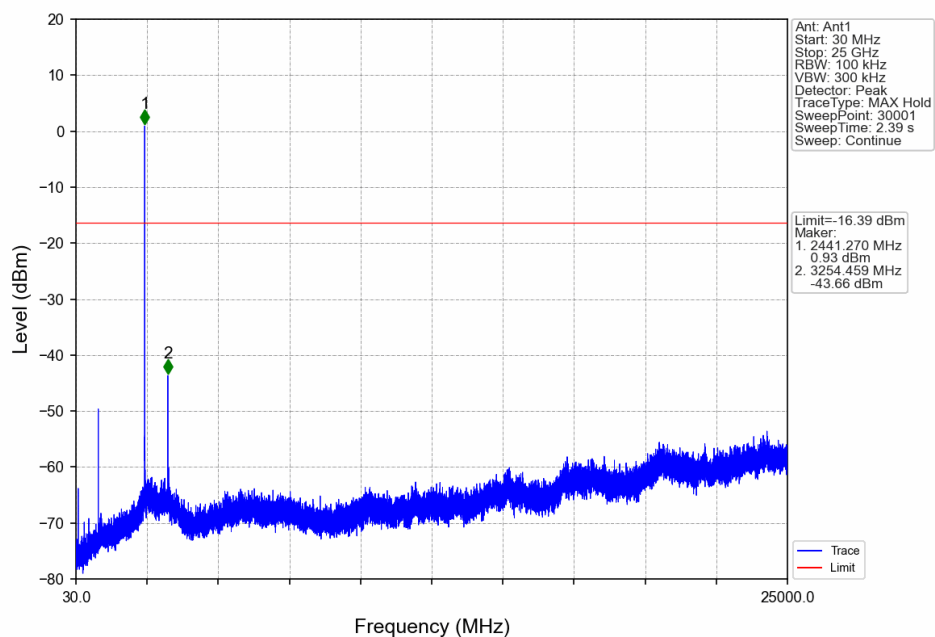


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

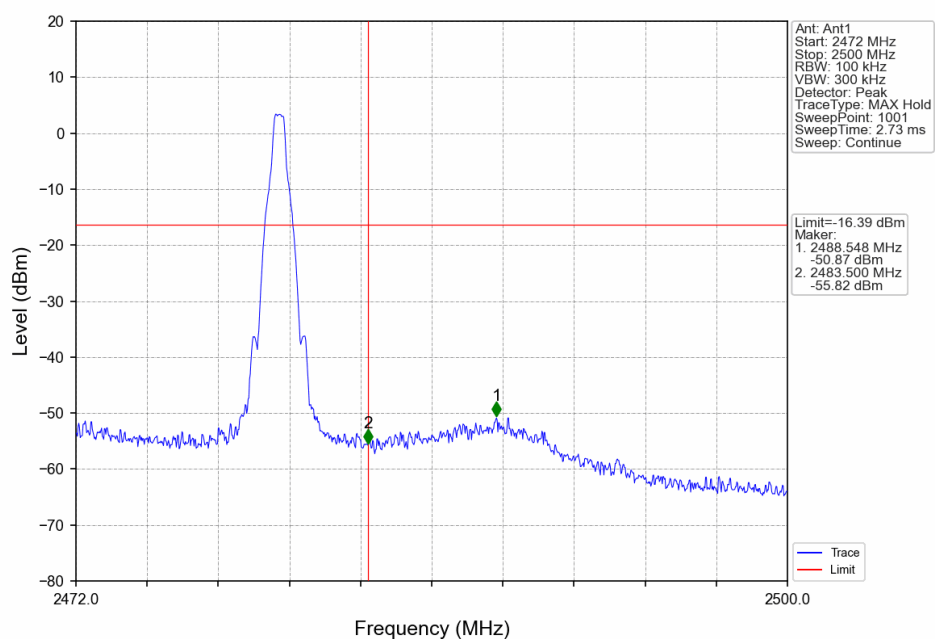


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

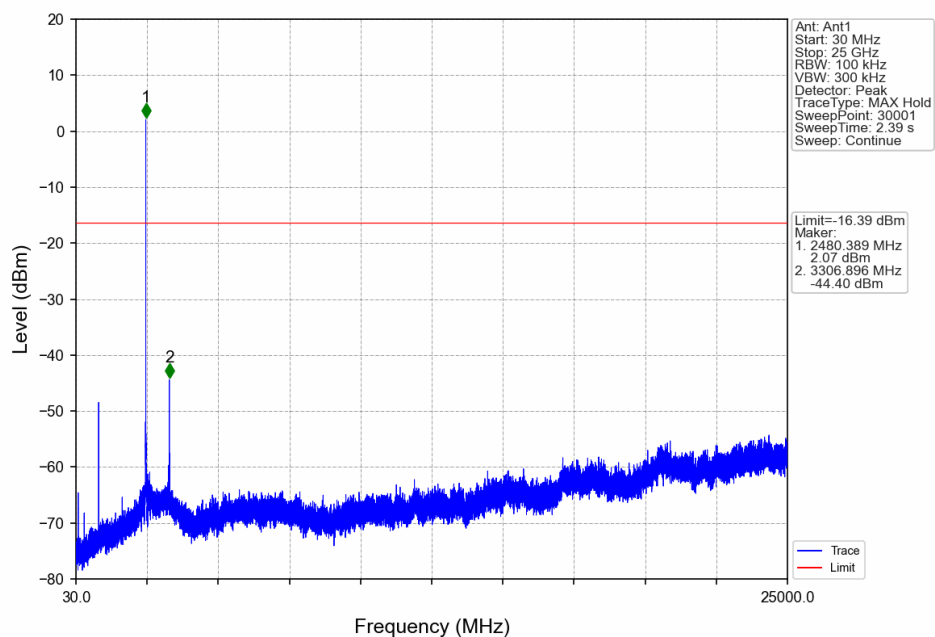


GFSK_DH5_HOPP_2410MHz_Ant1_NTNV

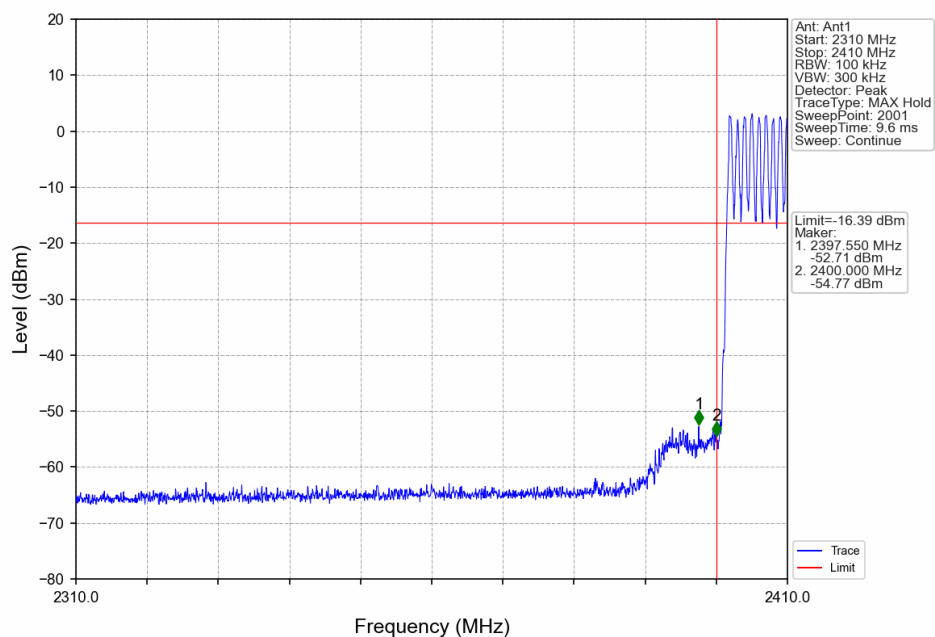


GFSK_DH5_HOPP_Ant1_NTNV

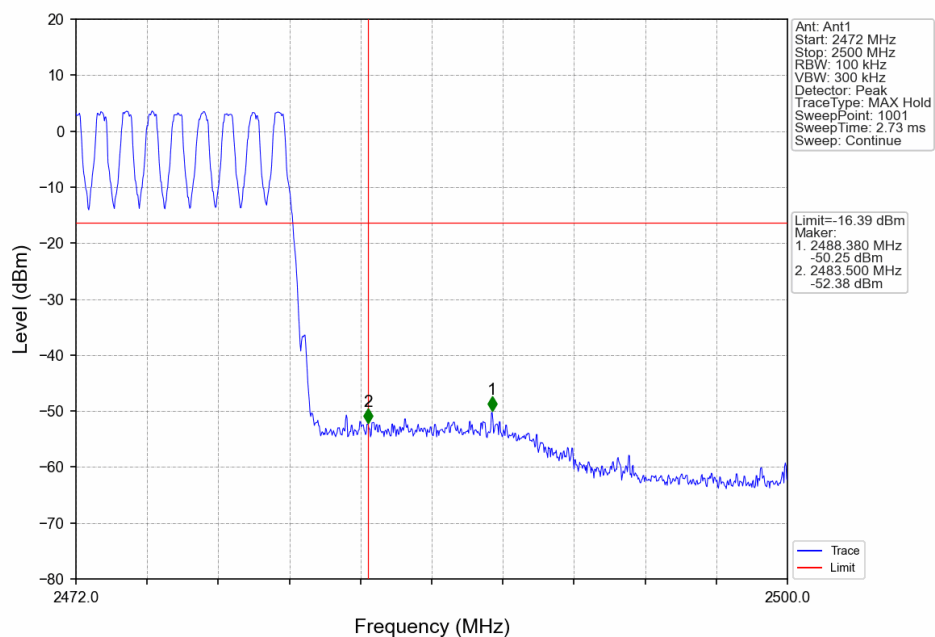


PI/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

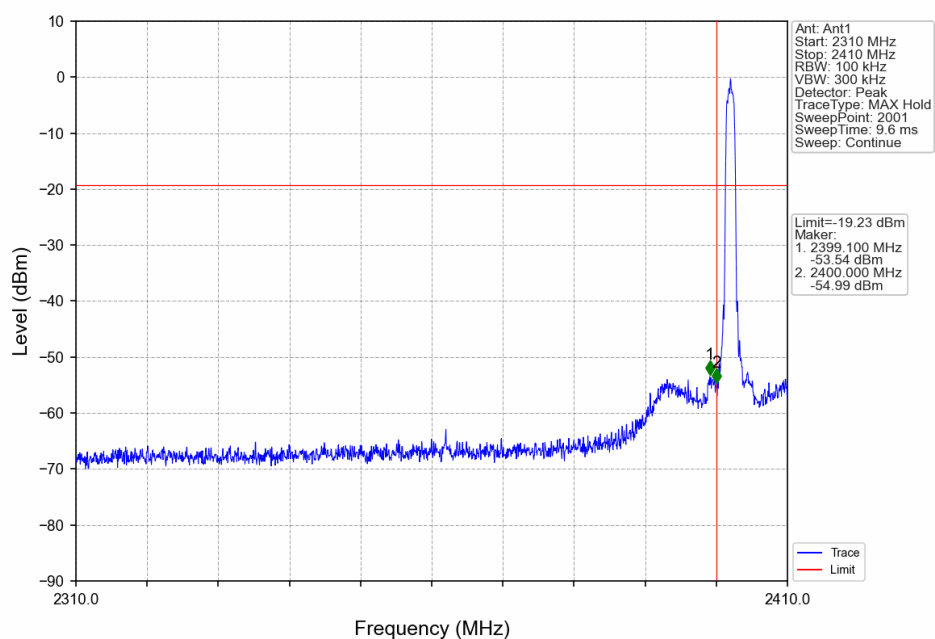


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

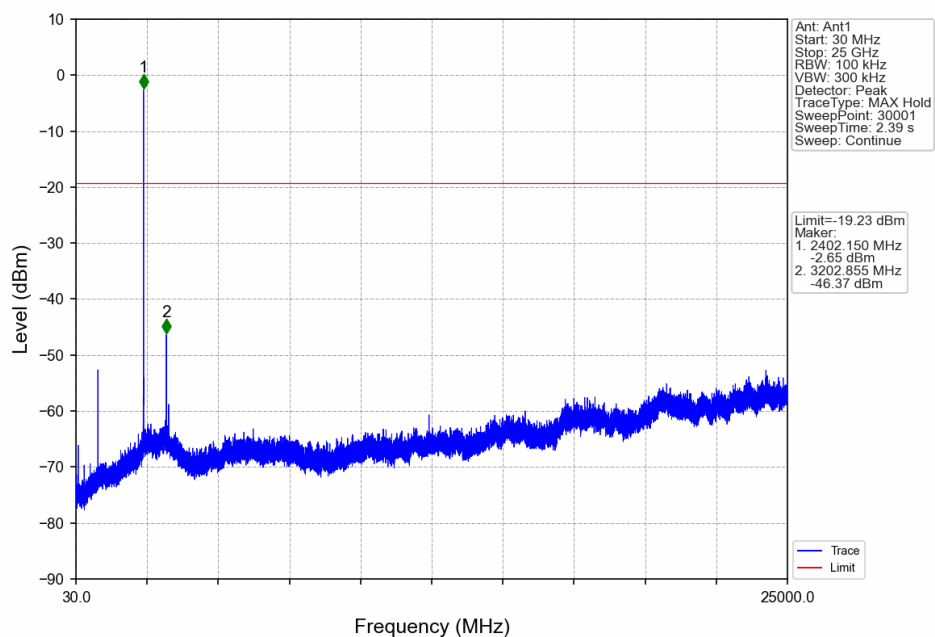


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

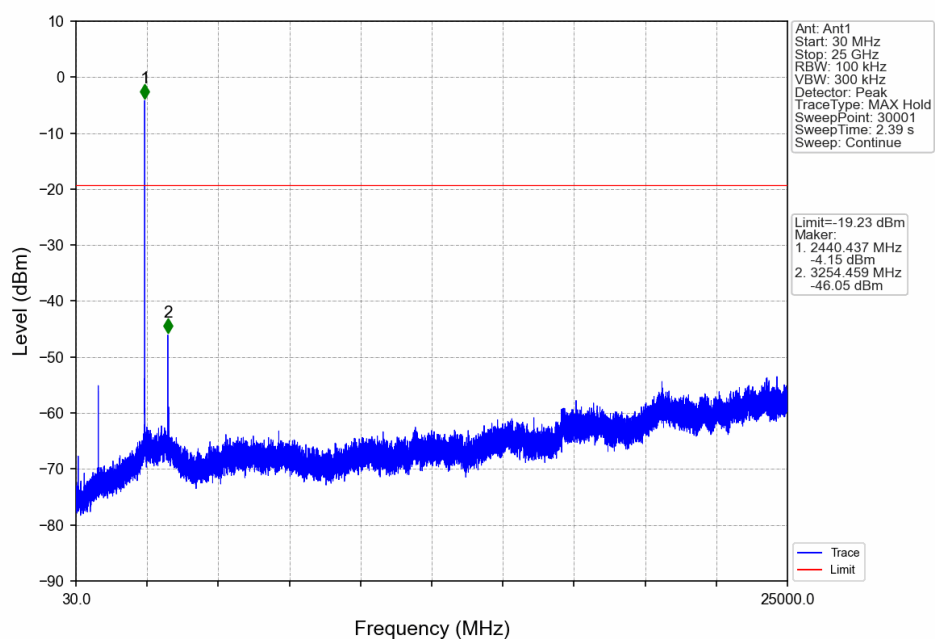


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

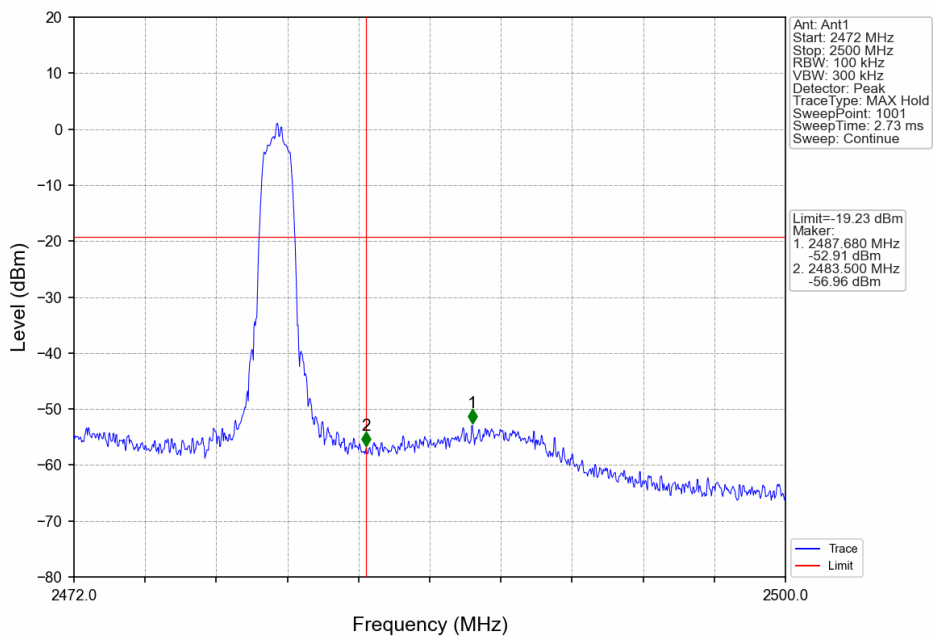


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

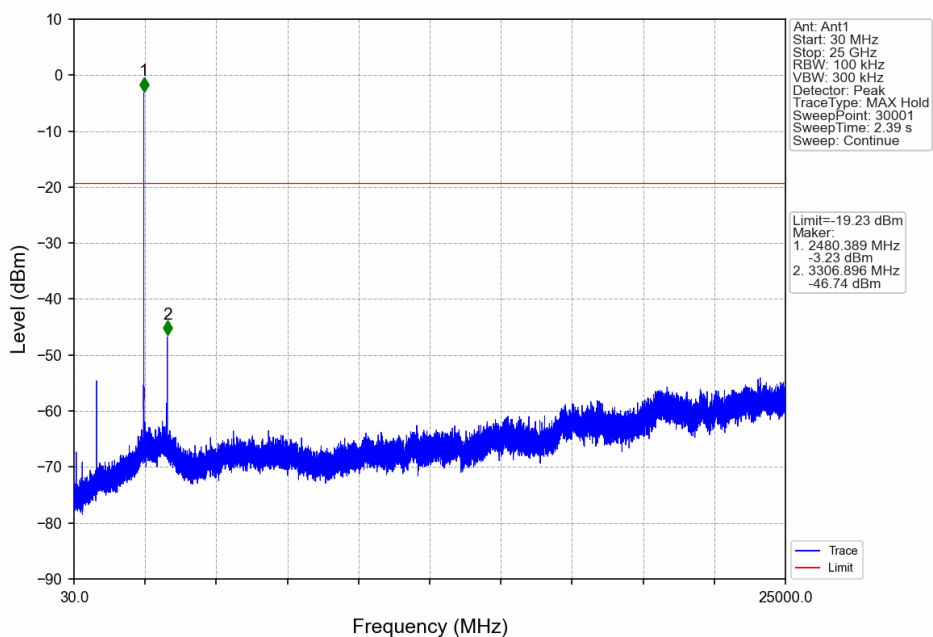


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

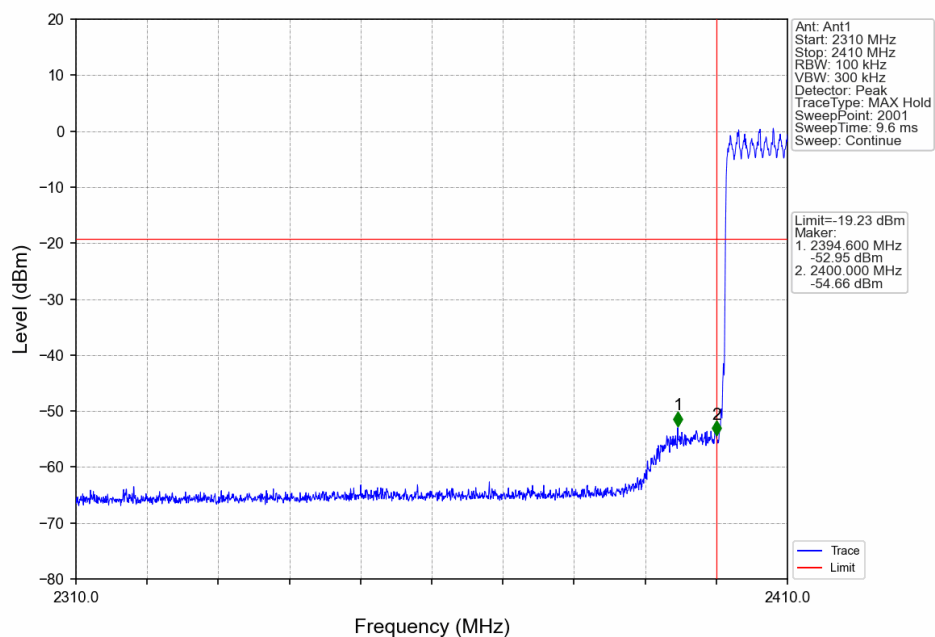


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

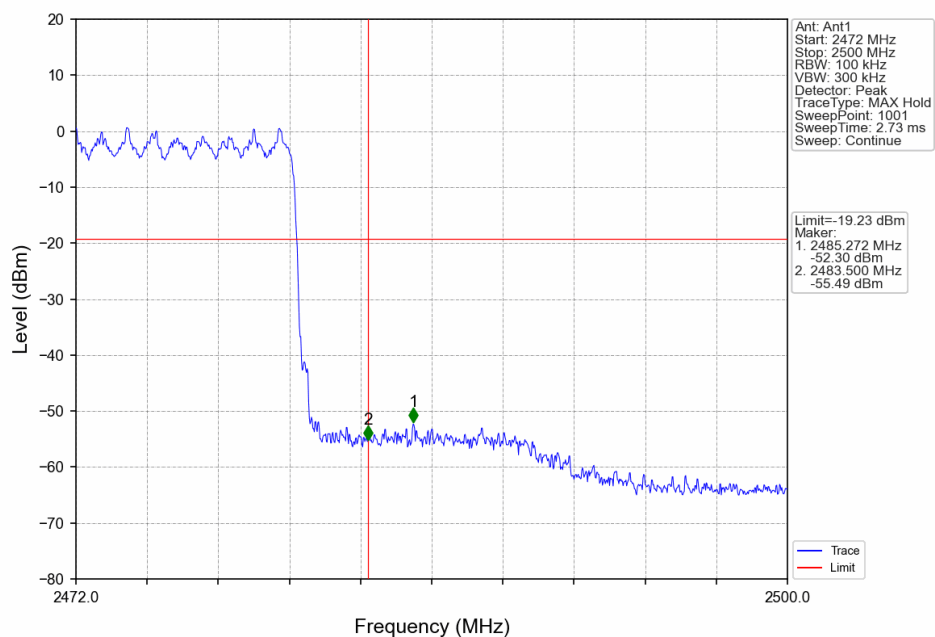


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

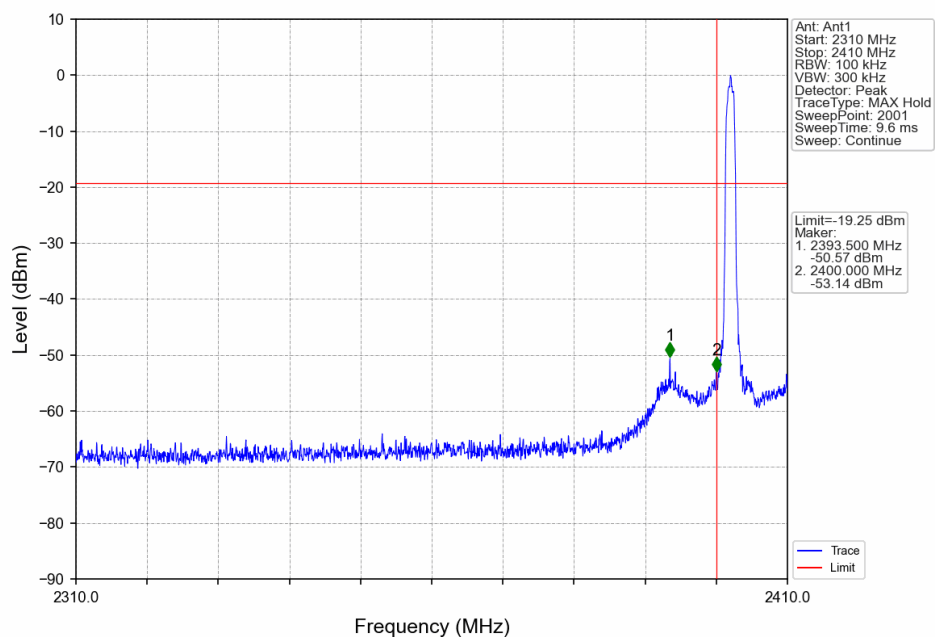


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

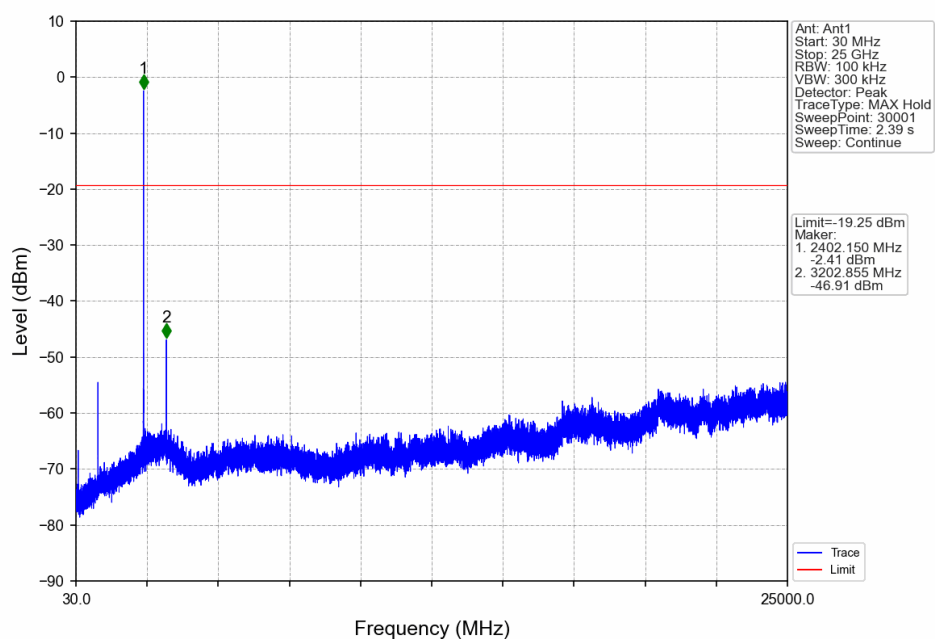


8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

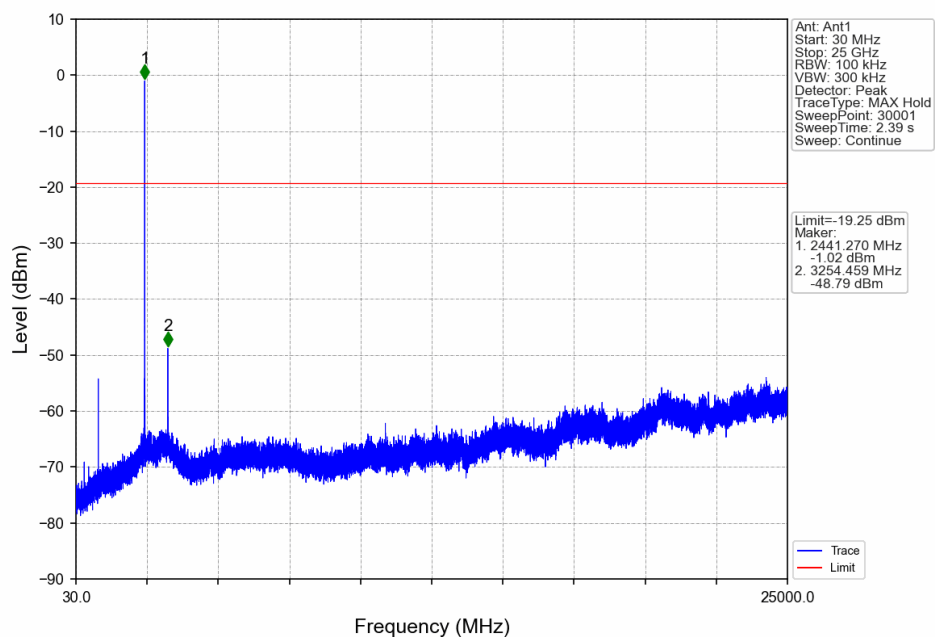


8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

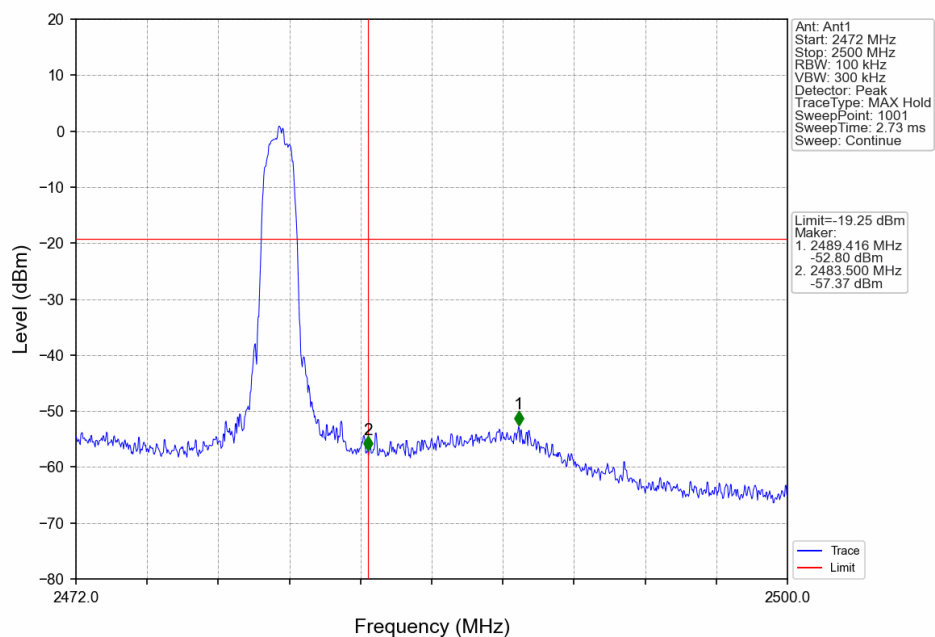


8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

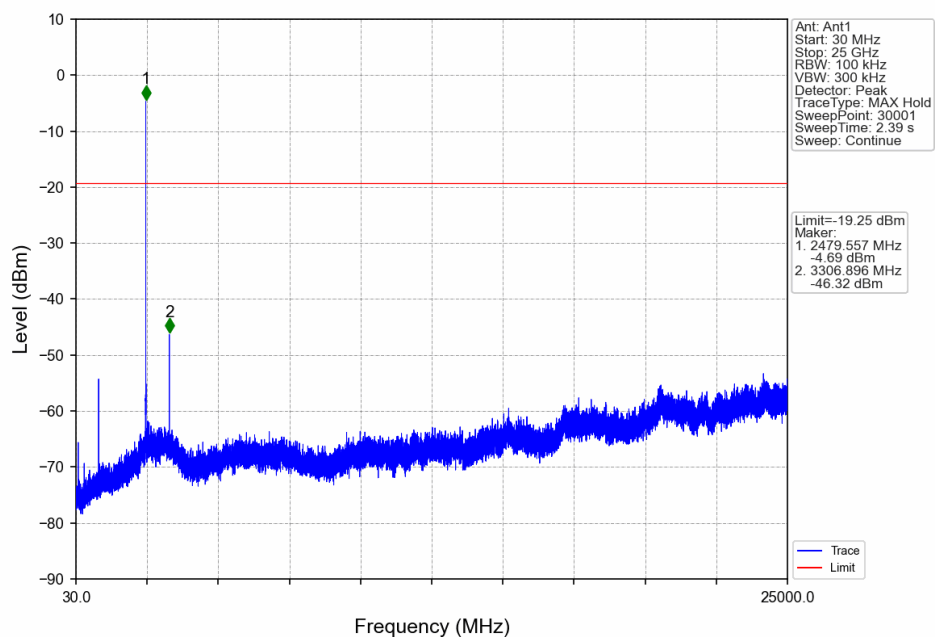

8DPSK_3DH5_HOPP_Ant1_NTNV

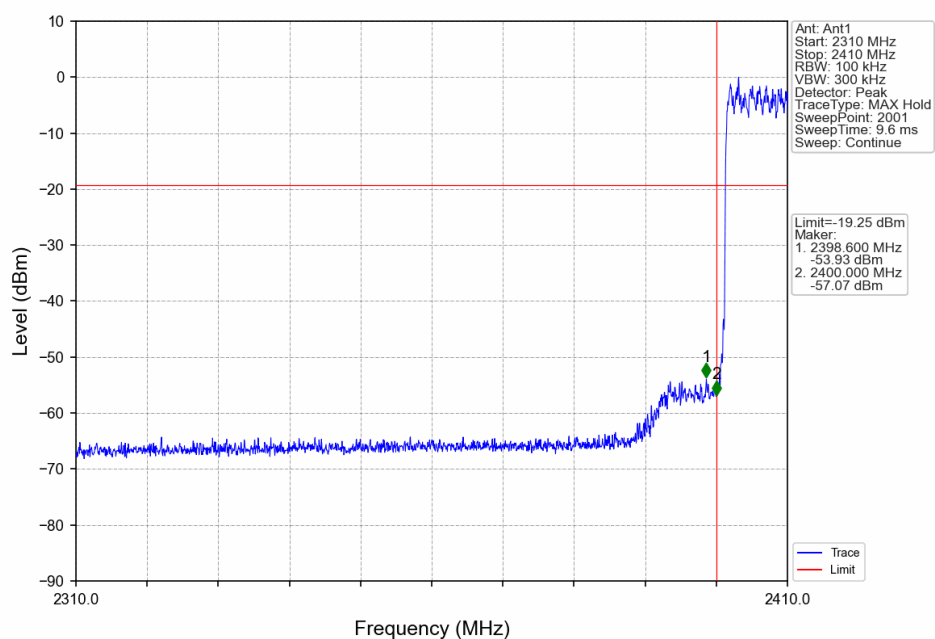

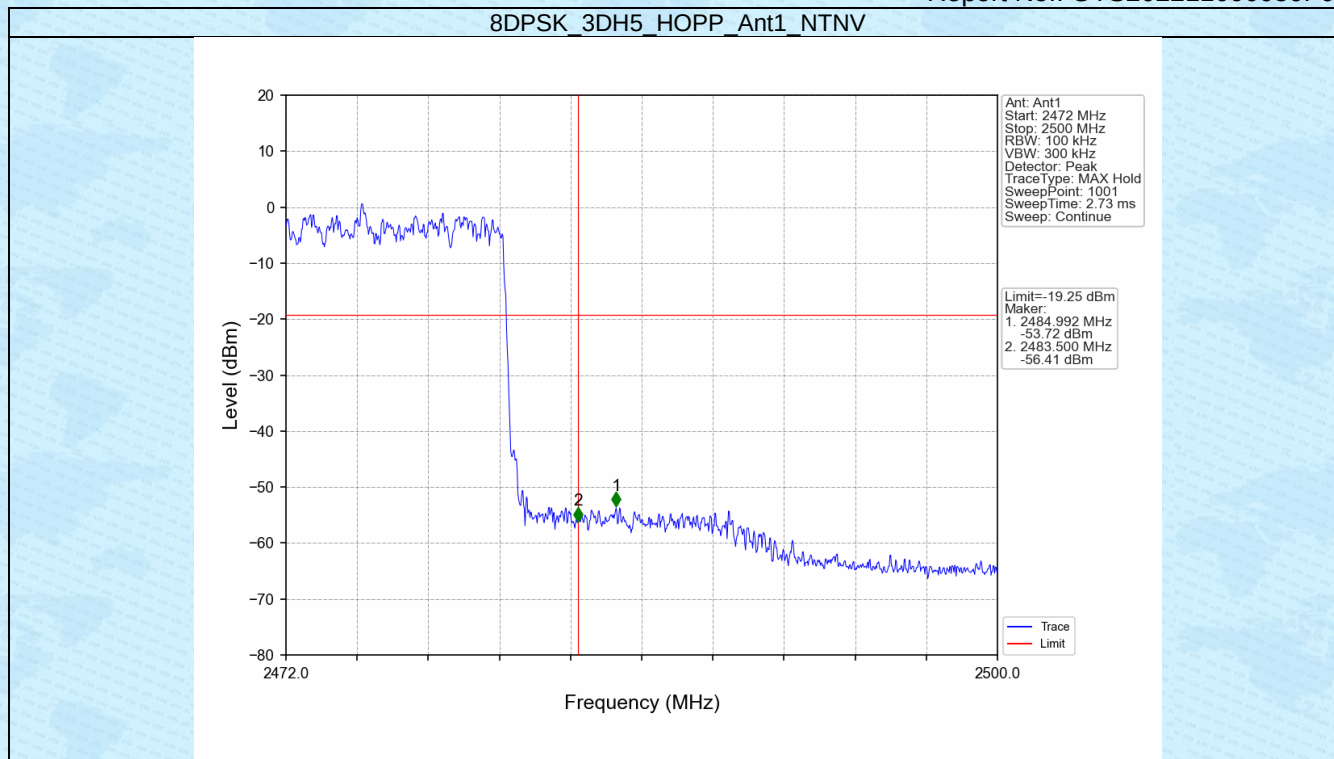

-----End-----