



FCC TEST REPORT

FCC ID: 2A3MU-NBASE

Product : Geodetic GNSS Receiver
Model Name : NBase
Brand : **farnav**
Report No. : NCT260221235E1-2

Prepared for

Shanghai EFIX Geomatics Co., Ltd.

Room 1137, Area D, 11th Floor, Building 1, No. 158, Shuanglian Road, Qingpu District,
Shanghai

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.

A101,B2,Fuqiao 6th Area ,xintian Community,Fuhai Street,Baoan
District,Shenzhen,China

TEL: 400-8868-419

1 TEST RESULT CERTIFICATION

Applicant : Shanghai EFIX Geomatics Co., Ltd.
Address : Room 1137, Area D, 11th Floor, Building 1, No. 158, Shuanglian Road, Qingpu District, Shanghai
Manufacturer : Shanghai EFIX Geomatics Co., Ltd.
Address : Room 1137, Area D, 11th Floor, Building 1, No. 158, Shuanglian Road, Qingpu District, Shanghai
Product name : Geodetic GNSS Receiver
Model name : NBase
Standards : FCC CFR47 Part 15 Section 15.247
Test procedure : ANSI C63.10-2020+Cor 1-2023
Date of test : April 29, 2026 – July 07, 2026
Date of Issue : July 07, 2026

This device described above has been tested by NCT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NCT, this document may be altered or revised by NCT, personal only, and shall be noted in the revision of the document.

Prepared by:

Shine Wu


Reviewer:

Keven Wu

Approved:

Henry Wang

Shine Wu



Contents

Page

1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF E.U.T.....	6
3.2 CHANNEL LIST	7
3.3 TEST SITE.....	8
3.4 TEST SETUP CONFIGURATION	8
3.5 TEST CONFIGURATION.....	9
4 EQUIPMENT DURING TEST	10
4.1 EQUIPMENTS LIST.....	10
4.2 MEASUREMENT UNCERTAINTY.....	13
4.3 DESCRIPTION OF SUPPORT UNITS.....	14
5 CONDUCTED EMISSION	15
5.1 E.U.T. OPERATION.....	15
5.2 EUT SETUP	15
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	16
5.4 MEASUREMENT PROCEDURE	16
5.5 CONDUCTED EMISSION LIMIT	16
5.6 MEASUREMENT DESCRIPTION.....	16
5.7 CONDUCTED EMISSION TEST RESULT	16
6 RADIATED SPURIOUS EMISSIONS	17
6.1 EUT OPERATION	17
6.2 TEST SETUP	18
6.3 SPECTRUM ANALYZER SETUP.....	19
6.4 TEST PROCEDURE.....	20
6.5 SUMMARY OF TEST RESULTS	21
7 CONDUCT BAND EDGE AND SPURIOUS EMISSIONS MEASUREMENT	32
7.1 TEST PROCEDURE.....	32
7.2 TEST SETUP BLOCKING.....	32

7.3 TEST RESULT	32
8 6DB&99% BANDWIDTH MEASUREMENT	33
8.1 TEST PROCEDURE.....	33
8.2 TEST SETUP BLOCKING.....	33
8.3 TEST RESULT	33
9 MAXIMUM OUTPUT POWER.....	34
9.1 TEST PROCEDURE.....	34
9.2 TEST SETUP LAYOUT	34
9.3 TEST RESULT	34
10 POWER SPECTRAL DENSITY.....	35
10.1 TEST PROCEDURE.....	35
10.2 TEST SETUP BLOCKING	35
10.3 TEST RESULT	35
11 ANTENNA APPLICATION	36
11.1 ANTENNA REQUIREMENT.....	36
11.2 RESULT	36
12 TEST SETUP AND EUT PHOTOS	37

2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	FCC part 15.207	N/A
Radiated Spurious Emissions	FCC part 15.205/15.209	PASS
Conducted Spurious Emission	FCC part 15.205/15.209	PASS
Band edge	FCC part 15.247(d)	PASS
6dB&99% Bandwidth	FCC part 15.247 (a)(2)	PASS
Maximum Peak Output Power	FCC part 15.247 (b)(3)	PASS
Power Spectral Density	FCC part 15.247 (e)	PASS
Antenna Requirement	FCC part 15.203/15.247 (c)	PASS

Remark:

"N/A" denotes test is not applicable in this Test Report.

3 General Information

3.1 General Description of E.U.T.

Product Name	:	Geodetic GNSS Receiver
Model Name	:	NBase
Sample ID	:	260221235-001#
Sample(s) Status:	:	Engineer sample
Series Model	:	N/A
Model Different.:	:	N/A
Specification	:	802.11b/g/n20
Operation Frequency	:	2412-2462MHz for 802.11b/g/n20
Number of Channel	:	11 channels for 802.11b/g/n20
Type of Modulation	:	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n
Antenna installation	:	Internal Antenna
Antenna Gain	:	1.95 dBi
Power supply	:	DC 7.4V from battery
Hardware Version	:	V1.0
Software Version	:	V1.0
Channel Puncturing Function	:	☐ Supported ☒ Unspported
Remark: the Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.		

3.2 Channel List

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps; 802.11g: 6 Mbps; 802.11n (HT20): MCS0) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11b/g/n20:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Test Frequency and Channel for 802.11 b/g/n/ (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462

3.3 Test Site

Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27

The certificate is valid until 2028.01.07

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)

The Certificate Registration Number is L8251

Designation Number: CN1347

Test Firm Registration Number: 894804

Accredited by A2LA, June 14, 2023

The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018

The Conformity Assessment Body Identifier is CN0150

Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.

Site Location : A101,B2,Fuqiao 6th Area ,xintian Community,Fuhai Street,Baoan District,Shenzhen,China

3.4 Test Setup Configuration

Radiated Emission

EUT

Radiated Spurious

EUT

Conducted Spurious



3.5 Test configuration

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

Test Software	SecureCRTPortable
Power level setup	802.11b(1Mbps,11Mbps,): Default; 802.11g(6Mbps,54Mbps: Default; 802.11n(HT20_MCS0,): Default

4 Equipment During Test

4.1 Equipments List

Radiated emission & Radio Frequency Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2025/1/17	2028/1/16
EMI Test Receiver	ESCI	101178	Rohde & Schwarz	2026/6/5	2027/6/4
Spectrum Analyze (10Hz-26.5GHz)	N9020A	MY50510202	Agilent	2026/6/5	2027/6/4
Amplifier (30MHz-1GHz)	BBV 9743 B	00374	SCHWARZBECK	2026/6/5	2027/6/4
Bilog Antenna (30MHz-1GHz)	VULB9162	00473	SCHWARZBECK	2026/3/07	2027/3/06
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHWARZBECK	2026/3/07	2027/3/06
Preamplifier (1GHz-18GHz)	BBV 9718D	00042	SCHWARZBECK	2026/6/5	2027/6/4
Spectrum Analyze (1GHz-40GHz)	FSV 40	100952	Rohde & Schwarz	2026/6/5	2027/6/4
Preamplifier (15GHz-40GHz)	BBV 9721	0056	SCHWARZBECK	2026/6/5	2027/6/4
Broadband Antenna (15GHz-40GHz)	SAS-574	588	A.H.System	2026/6/5	2027/6/4
Loop Antenna (9KHz-30MHz)	FMZB1519B	014	SCHWARZBECK	2026/6/9	2027/6/8
Capacitive voltage probe	CVP 9222 C	00109	SCHWARZBECK	2026/6/5	2027/6/4
MXG Signal Analyzer	N9020A	MY50510202	Agilent	2026/6/5	2027/6/4
MXG Vector Signal Generator	N5182A	MY50140020	Agilent	2026/6/5	2027/6/4
MXG Analog Signal Generator	N5181A	MY47420919	Agilent	2026/6/5	2027/6/4
Power Meter	ML2485A	319502	Aritsu	2026/6/5	2027/6/4
Power Sensor	TR1029-2	512364	Techoy	2026/6/5	2027/6/4

RF Swith	TR1029-1	512364	Techoy	2026/6/5	2027/6/4
Cable	DA800-4000MM	NA	DA	2026/6/5	2027/6/4
Cable	DA800-11000MM	NA	DA	2026/6/5	2027/6/4
High Pass Filter	HXHPF-3G-S	202507220001	luanwei	2026/6/5	2027/6/4
Attenuator	SN-SMA-10	N/A	SNIT	2026/6/5	2027/6/4

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2025/1/17	2028/1/16
EMI Test Receiver	ESCI	101178	Rohde & Schwarz	2025/6/10	2026/6/09
Spectrum Analyze (10Hz-26.5GHz)	N9020A	MY50510202	Agilent	2025/6/10	2026/6/09
Amplifi (30MHz-1GHz)	BBV 9743 B	00374	SCHWARZBECK	2025/6/10	2026/6/09
Bilog Antenna (30MHz-1GHz)	VULB9162	00473	SCHWARZBECK	2026/3/07	2027/3/06
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHWARZBECK	2026/3/07	2027/3/06
Pream plifier (1GHz-18GHz)	BBV 9718D	00042	SCHWARZBECK	2025/6/10	2026/6/09
Spectrum Analyze (1GHz-40GHz)	FSV 40	100952	Rohde & Schwarz	2025/6/10	2026/6/09
Pream plifier (15GHz-40GHz)	BBV 9721	0056	SCHWARZBECK	2025/6/10	2026/6/09
Broadband Antenna (15GHz-40GHz)	SAS-574	588	A.H.System	2025/6/10	2026/6/09
Loop Antenna (9KHz-30MHz)	FMZB1519B	014	SCHWARZBECK	2025/6/13	2026/6/12
Capacitive voltage probe	CVP 9222 C	00109	SCHWARZBECK	2025/6/10	2026/6/09
MXG Signal Analyzer	N9020A	MY50510202	Agilent	2025/6/10	2026/6/09

MXG Vector Signal Generator	N5182A	MY50140020	Agilent	2025/6/10	2026/6/09
MXG Analog Signal Generator	N5181A	MY47420919	Agilent	2025/6/10	2026/6/09
Power Meter	ML2485A	319502	Aritsu	2025/6/10	2026/6/09
Power Sensor	TR1029-2	512364	Techoy	2025/6/10	2026/6/09
RF Swith	TR1029-1	512364	Techoy	2025/6/10	2026/6/09
Cable	DA800-4000MM	NA	DA	2025/6/10	2026/6/09
Cable	DA800-11000MM	NA	DA	2025/6/10	2026/6/09
High Pass Filter	HXHPF-3G-S	202507220001	luanwei	2025/6/10	2026/6/09
Attenuator	SN-SMA-10	N/A	SNIT	2025/6/10	2026/6/09

Conducted emission Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	944 Room	/	EMToni	2025/1/17	2028/1/16
EMI Test Receiver	ESPI	101604	Rohde & Schwarz	2026/6/5	2027/6/4
LISN	ENV 216	102796	Rohde & Schwarz	2026/6/5	2027/6/4
LISN	VN1-13S	004023	CRANAGE	2026/6/5	2027/6/4
Cable	RG223-1500MM	NA	RG	2026/6/5	2027/6/4

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	944 Room	/	EMToni	2025/1/17	2028/1/16
EMI Test Receiver	ESPI	101604	Rohde & Schwarz	2025/6/10	2026/6/09
LISN	ENV 216	102796	Rohde & Schwarz	2025/6/10	2026/6/09
LISN	VN1-13S	004023	CRANAGE	2025/6/10	2026/6/09
Cable	RG223-1500MM	NA	RG	2025/6/10	2026/6/09

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ-EMC	Ver.EMC-CON 3A1.1+
2	EMC radiation test system	FALA	EZ-EMC	Ver.FA-03A2 RE+
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 × 10 ⁻⁶
Bandwidth	± 1.5 × 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.24dB
Radiated Emission(9KHz~30MHz)	±4.51dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Radiated Emission(25GHz~40GHz)	±3.38dB
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	

4.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
/	/	/	/	/	/

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

5 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207
Test Method : ANSI C63.10-2020+Cor 1-2023
Test Result : PASS
Frequency Range : 150kHz to 30MHz
Class/Severity : Class B


5.1 E.U.T. Operation

Operating Environment :


Temperature : 24.5 °C
Humidity : 51.3 % RH
Atmospheric Pressure : 101.11kPa

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10-2020+Cor 1-2023.

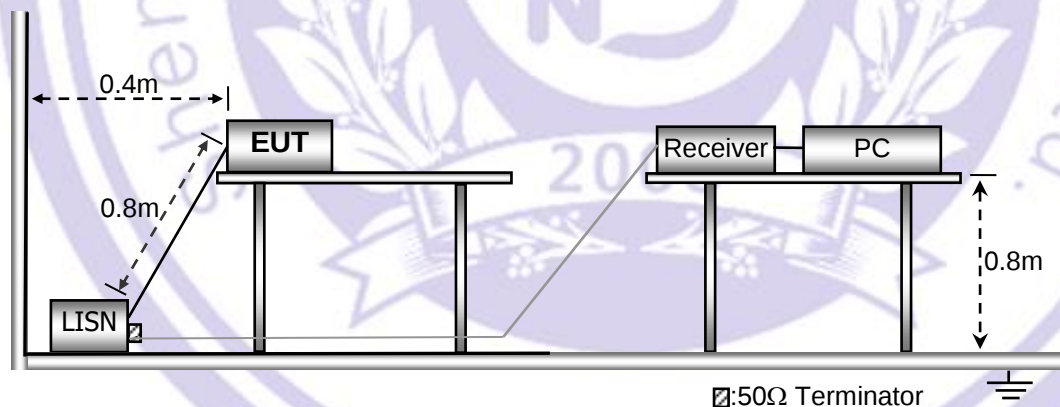

5.3 Test SET-UP (Block Diagram of Configuration)

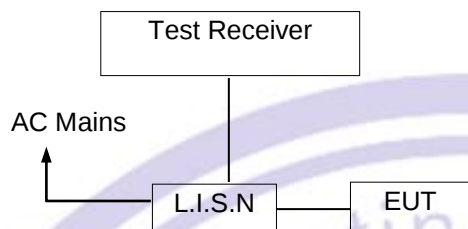

5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

5.7 Conducted Emission Test Result

Not applicable for equipment operated with battery.

6 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247
RSS-Gen §8.9, RSS-Gen §8.10
Test Method : ANSI C63.10-2020+Cor 1-2023
Test Result : PASS
Measurement Distance : 3m
Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1 EUT Operation

Operating Environment :

Temperature: : 23.6°C


Humidity: : 55 % RH

Atmospheric Pressure: : 101kPa


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

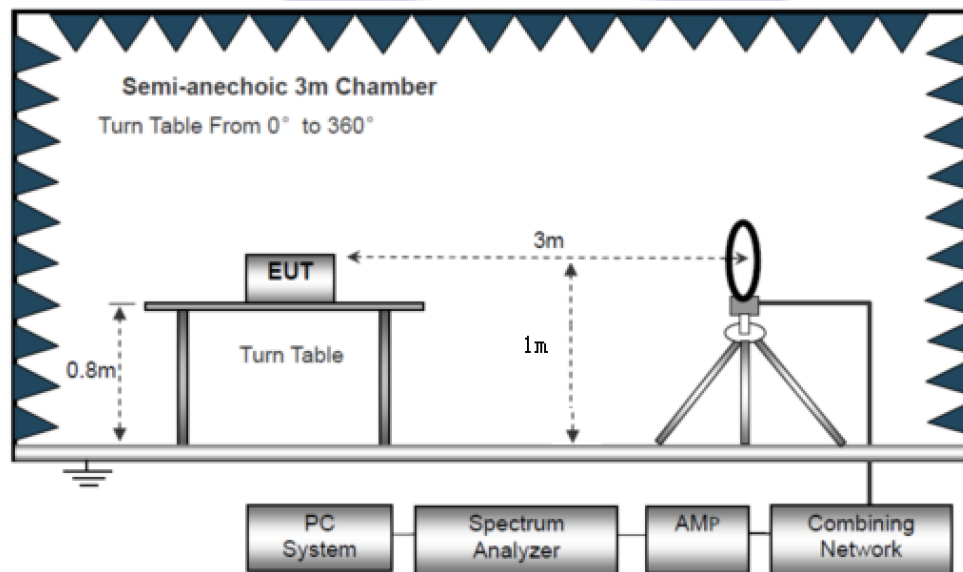

The test setup for emission measurement from 30 MHz to 1 GHz.

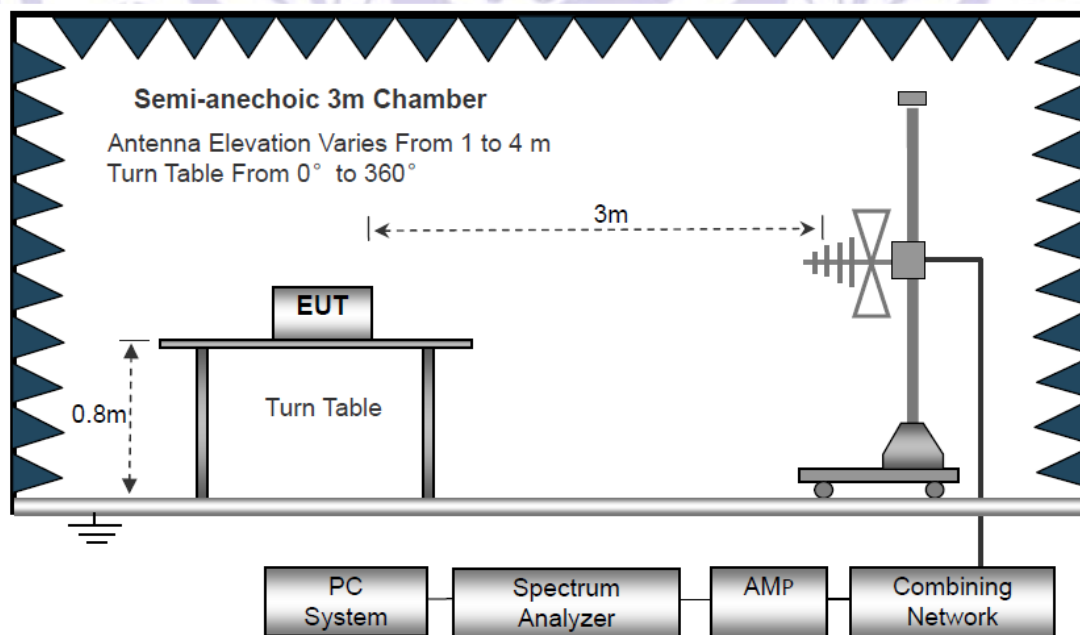

The test setup for emission measurement above 1 GHz

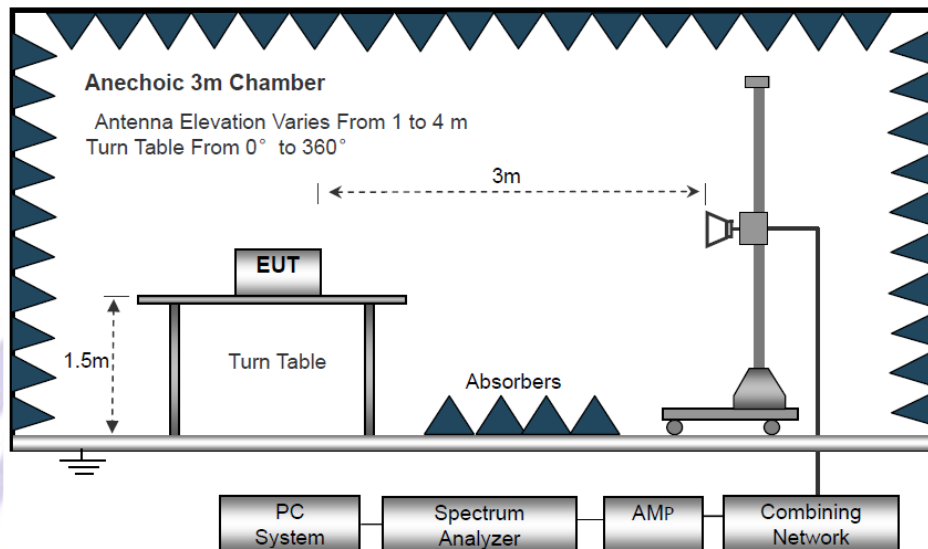

6.3 Spectrum Analyzer Setup

Below 30MHz			
IF Bandwidth	:	10kHz	
Resolution Bandwidth	:	10kHz	
Video Bandwidth	:	10kHz	
30MHz ~ 1GHz			
Detector	:	PK	QP
Resolution Bandwidth	:	100kHz	120kHz
Video Bandwidth	:	300kHz	300kHz
Above 1GHz			
Detector	:	PK	AV
Resolution Bandwidth	:	1MHz	1MHz
Video Bandwidth	:	3MHz	10Hz

6.4 Test Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. For cases where the test frequency exceeds 1GHz, an external band-stop filter should be connected in series between the receiving antenna and the input end of the test receiver.
9. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room

6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


Distance extrapolation factor = $40 \log(\text{Specific distance} / \text{test distance})$ (dB);
Limit line = Specific limits (dBuV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1GHz

All the modulation modes were tested the data of the worst mode (TX 802.11b Low Channel) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following test plots:

Temperature:	23.6℃	Relative Humidity:	55%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 7.4V		

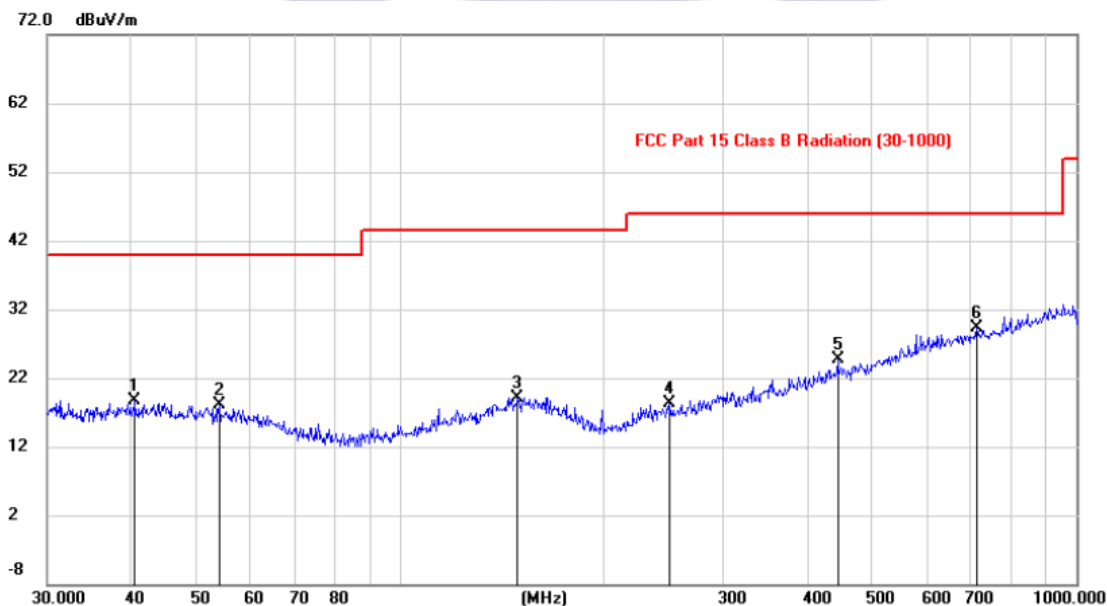


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		40.4266	-1.15	19.80	18.65	40.00	-21.35	peak		
2		53.9196	-1.11	19.21	18.10	40.00	-21.90	peak		
3		149.1367	-1.28	20.45	19.17	43.50	-24.33	peak		
4		250.6525	-0.52	18.77	18.25	46.00	-27.75	peak		
5		443.3461	0.71	23.96	24.67	46.00	-21.33	peak		
6	*	713.2557	0.77	28.58	29.35	46.00	-16.65	peak		

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Temperature:	23.6°C	Relative Humidity:	55%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 7.4V		

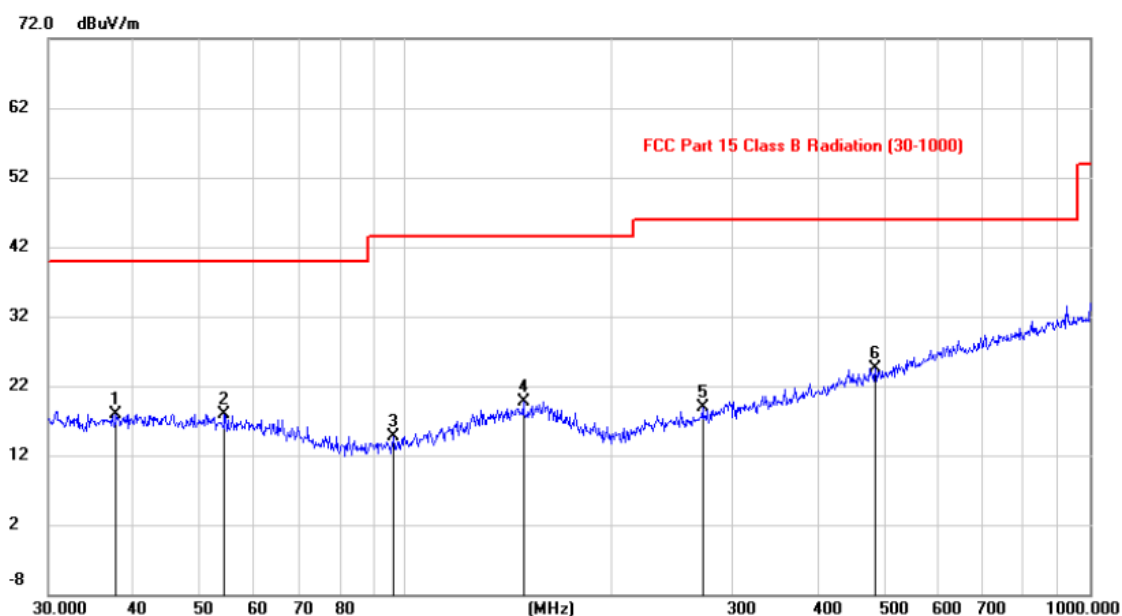


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		37.7062	-1.69	19.62	17.93	40.00	-22.07			peak
2		54.2927	-1.35	19.20	17.85	40.00	-22.15			peak
3		96.0649	-1.16	15.90	14.74	43.50	-28.76			peak
4		148.5278	-0.66	20.45	19.79	43.50	-23.71			peak
5		272.2140	-0.46	19.37	18.91	46.00	-27.09			peak
6	*	486.9734	0.05	24.53	24.58	46.00	-21.42			peak

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

Test Frequency: From 1GHz to 18GHz

Temperature:	23.6°C	Relative Humidity:	55%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 7.4V	Mode	802.11b Low Channel

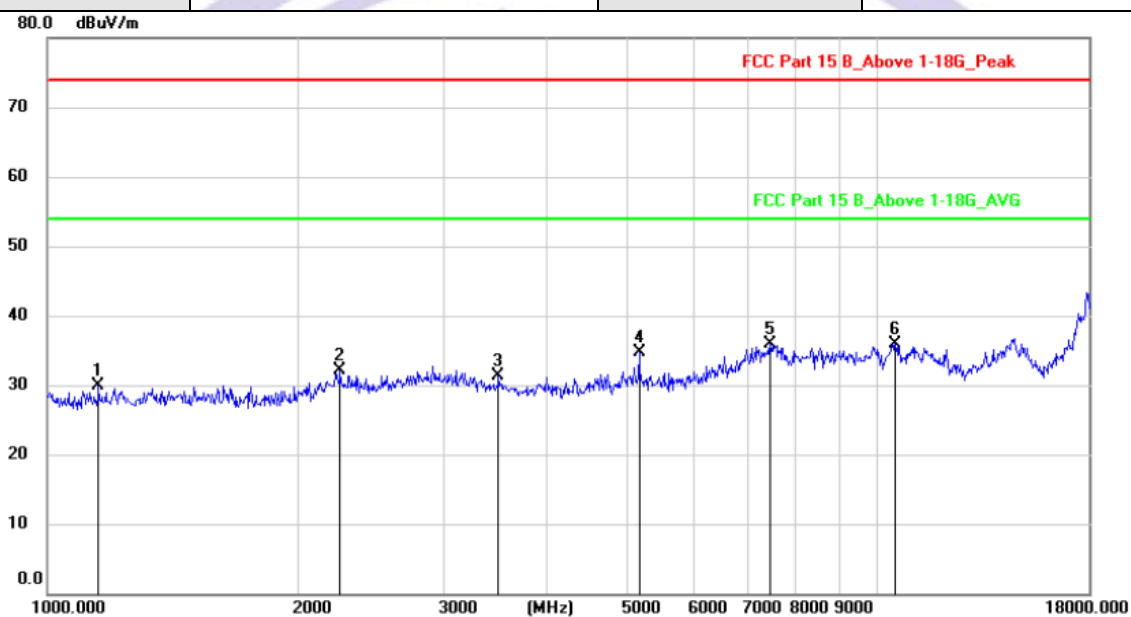


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		1155.038	51.85	-22.04	29.81	74.00	-44.19	peak		
2		2253.932	50.74	-18.67	32.07	74.00	-41.93	peak		
3		3497.375	48.61	-17.31	31.30	74.00	-42.70	peak		
4		5175.059	48.58	-13.83	34.75	74.00	-39.25	peak		
5		7450.839	44.89	-9.07	35.82	74.00	-38.18	peak		
6	*	10518.63	42.01	-6.02	35.99	74.00	-38.01	peak		

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Temperature:	23.6℃	Relative Humidity:	55%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 7.4V	Mode	802.11b Low Channel

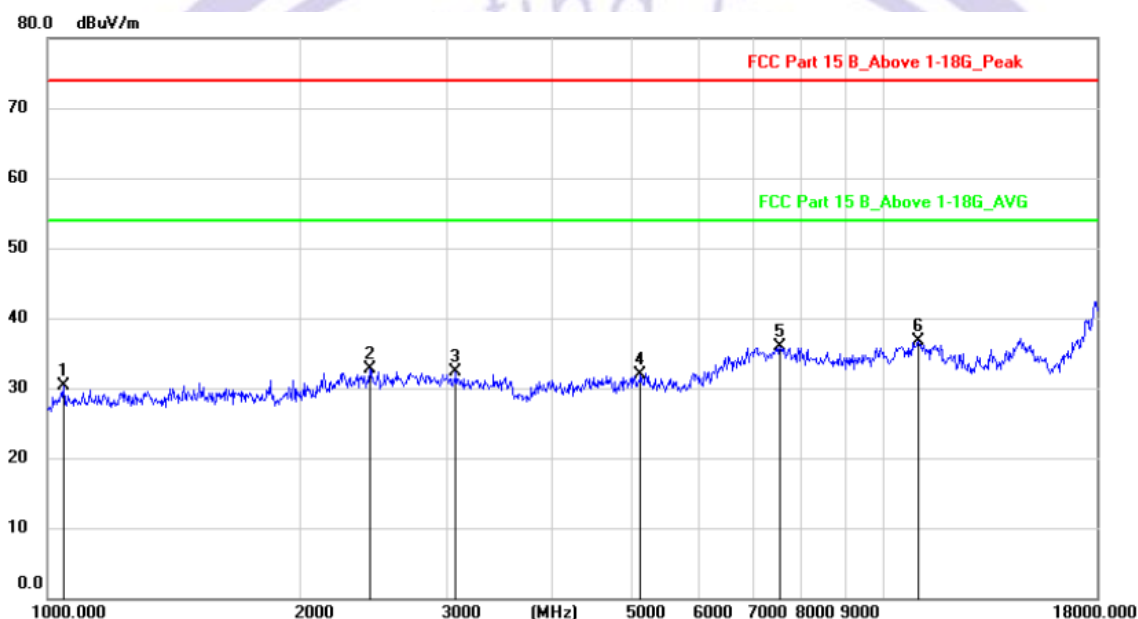


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1		1045.819	52.67	-22.37	30.30	74.00	-43.70	peak		
2		2432.183	51.51	-18.85	32.66	74.00	-41.34	peak		
3		3082.384	49.80	-17.54	32.26	74.00	-41.74	peak		
4		5124.452	45.60	-13.78	31.82	74.00	-42.18	peak		
5		7539.660	44.98	-9.13	35.85	74.00	-38.15	peak		
6	*	11042.00	42.21	-5.51	36.70	74.00	-37.30	peak		

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Temperature:	23.6℃	Relative Humidity:	55%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 7.4V	Mode	802.11b Mid Channel

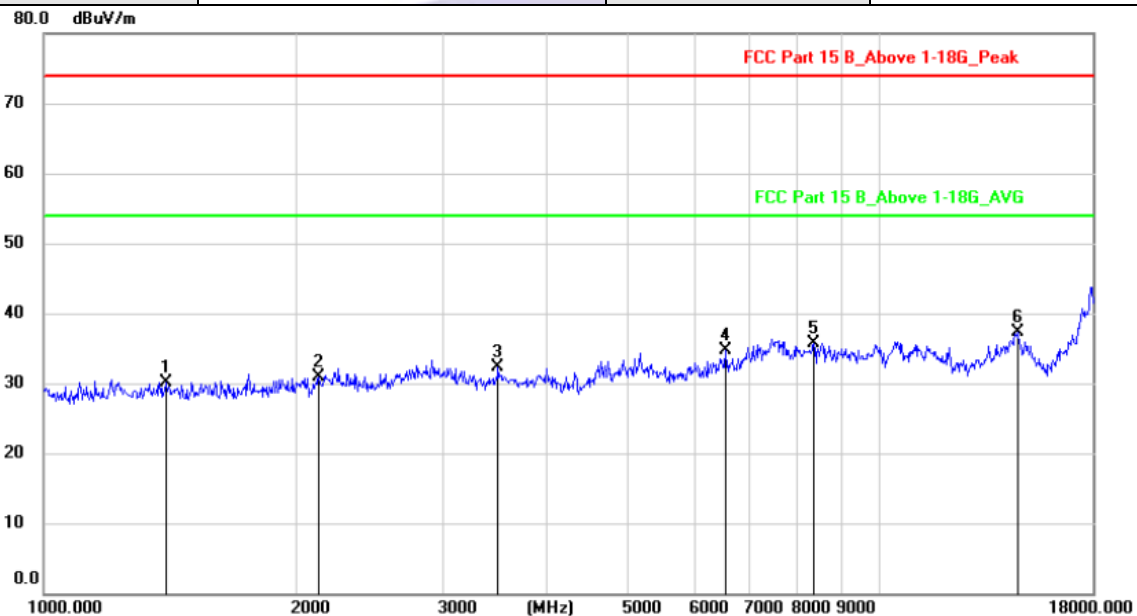


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		1405.765	51.51	-21.33	30.18	74.00	-43.82	peak		
2		2134.929	50.18	-19.36	30.82	74.00	-43.18	peak		
3		3497.375	49.61	-17.31	32.30	74.00	-41.70	peak		
4		6547.155	45.70	-11.04	34.66	74.00	-39.34	peak		
5		8366.457	45.12	-9.39	35.73	74.00	-38.27	peak		
6	*	14693.00	40.11	-2.86	37.25	74.00	-36.75	peak		

Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Temperature:	23.6℃	Relative Humidity:	55%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 7.4V	Mode	802.11b Mid Channel

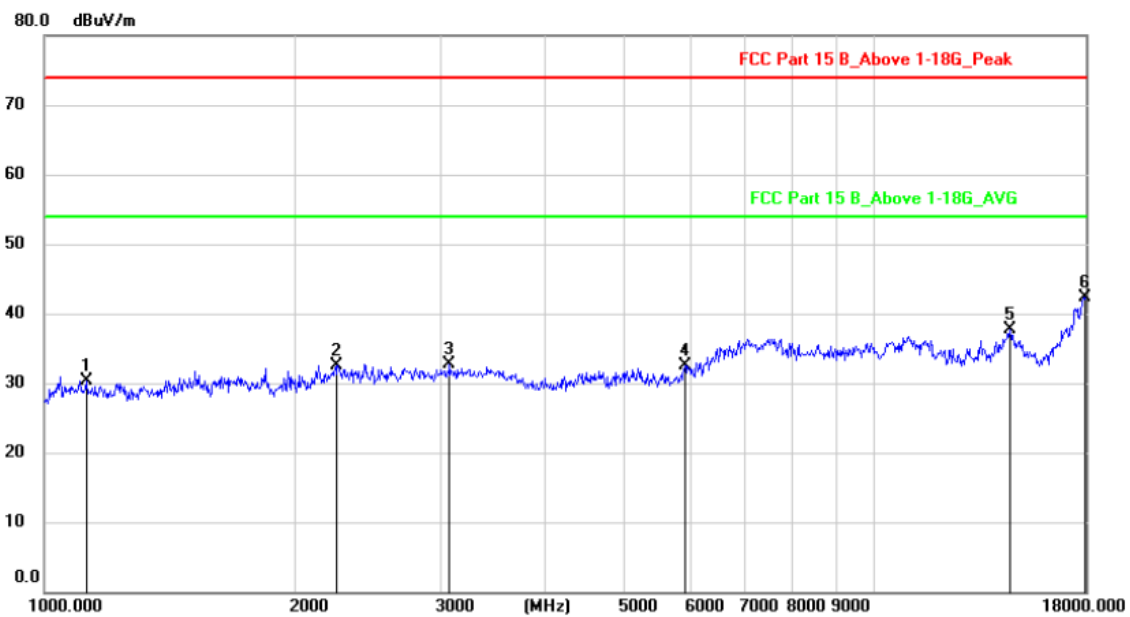


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Comment
1		1122.888	52.42	-22.19	30.23	74.00	-43.77			peak
2		2253.498	51.26	-18.67	32.59	74.00	-41.41			peak
3		3082.384	50.30	-17.54	32.76	74.00	-41.24			peak
4		5932.638	45.49	-12.94	32.55	74.00	-41.45			peak
5		14577.37	40.40	-2.79	37.61	74.00	-36.39			peak
6	*	17951.50	39.94	2.38	42.32	74.00	-31.68			peak

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

Temperature:	23.6℃	Relative Humidity:	55%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 7.4V	Mode	802.11b High Channel

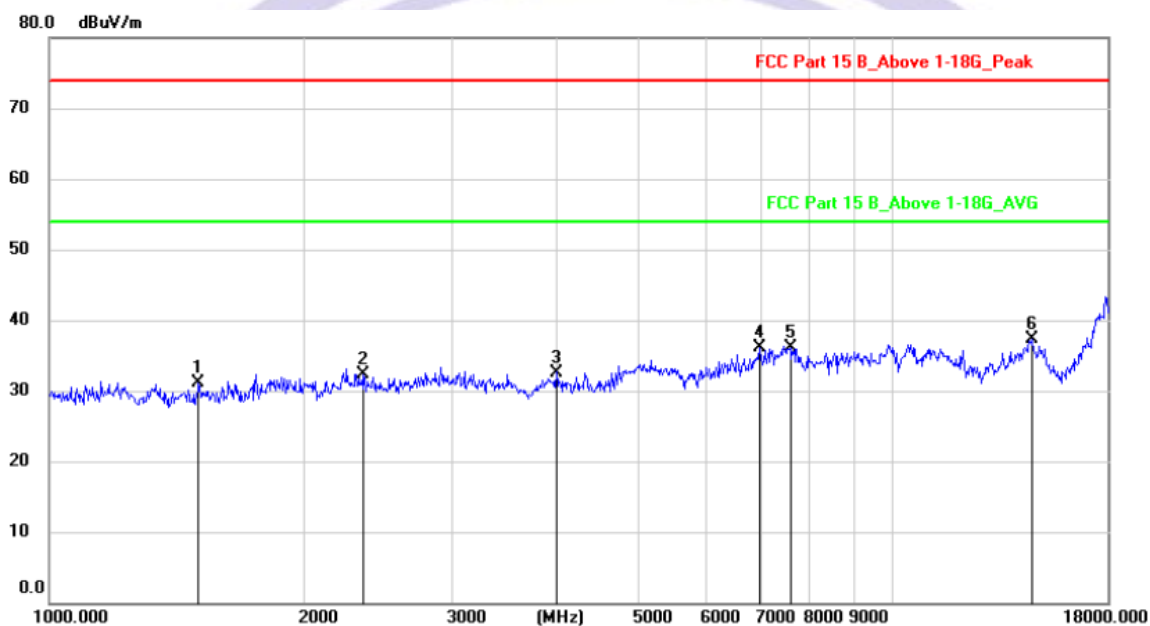


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		1506.163	52.81	-21.61	31.20	74.00	-42.80	peak		
2		2361.752	51.07	-18.73	32.34	74.00	-41.66	peak		
3		3993.936	48.91	-16.31	32.60	74.00	-41.40	peak		
4		6970.280	46.23	-10.03	36.20	74.00	-37.80	peak		
5		7568.044	45.30	-9.14	36.16	74.00	-37.84	peak		
6	*	14693.00	40.11	-2.86	37.25	74.00	-36.75	peak		

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

Temperature:	23.6°C	Relative Humidity:	55%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 7.4V	Mode	802.11b High Channel

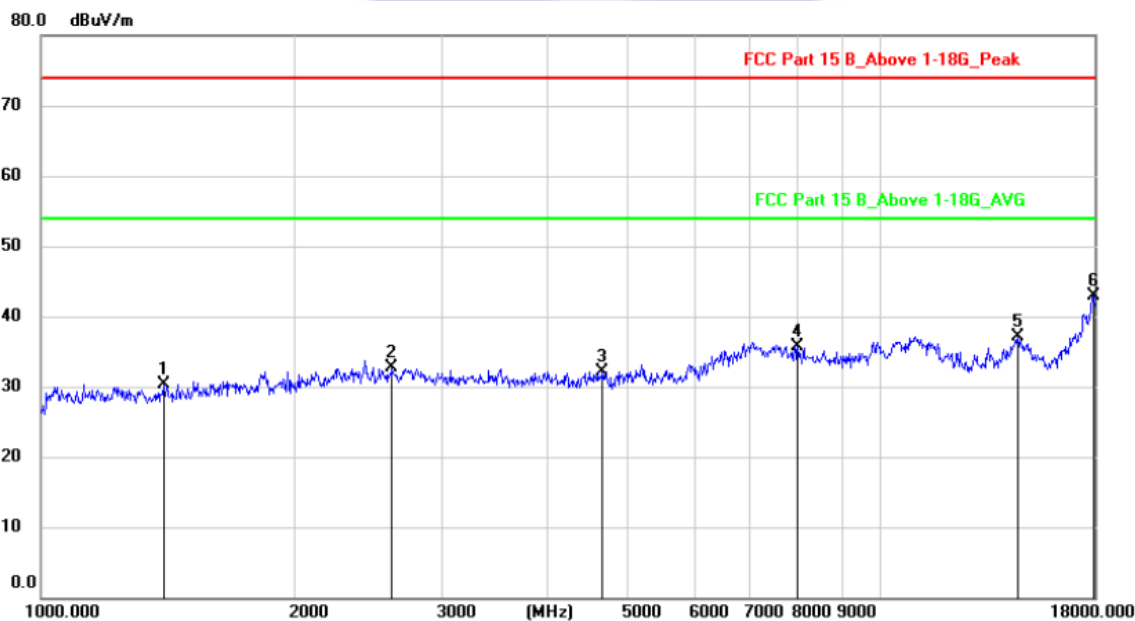

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	dBuV	Factor	ment			Height	Degree	
					dBuV/m	dBuV/m	dB	Detector	cm	degree
1		1398.336	51.65	-21.33	30.32	74.00	-43.68	peak		
2		2619.479	51.25	-18.51	32.74	74.00	-41.26	peak		
3		4676.243	46.81	-14.68	32.13	74.00	-41.87	peak		
4		7979.891	44.68	-8.89	35.79	74.00	-38.21	peak		
5		14577.37	39.90	-2.79	37.11	74.00	-36.89	peak		
6	*	17951.50	40.44	2.38	42.82	74.00	-31.18	peak		

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Remark: 1. Since the peak value is less than the limit of the AVG value, there is no AVG data.

2. From 18GHz to 26.5GHz, the amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


3. Pre-scan all mode, and found the 802.11b mode which it is worse case, so only show the test data for worse case

Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 7.4V	Mode	802.11G Low Channel

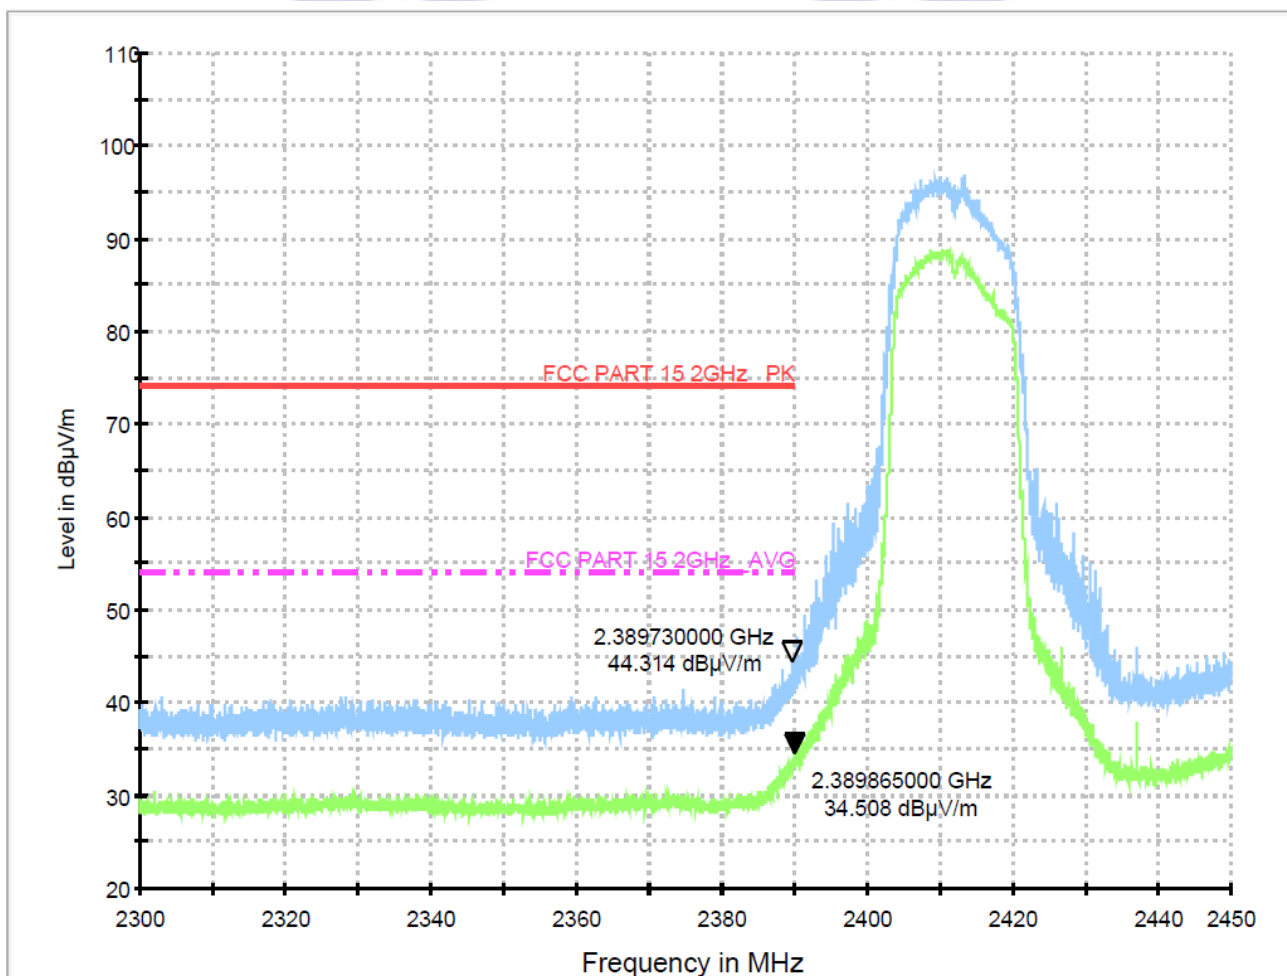

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Horizontal
Test Voltage:	DC 7.4V	Mode	802.11G High Channel

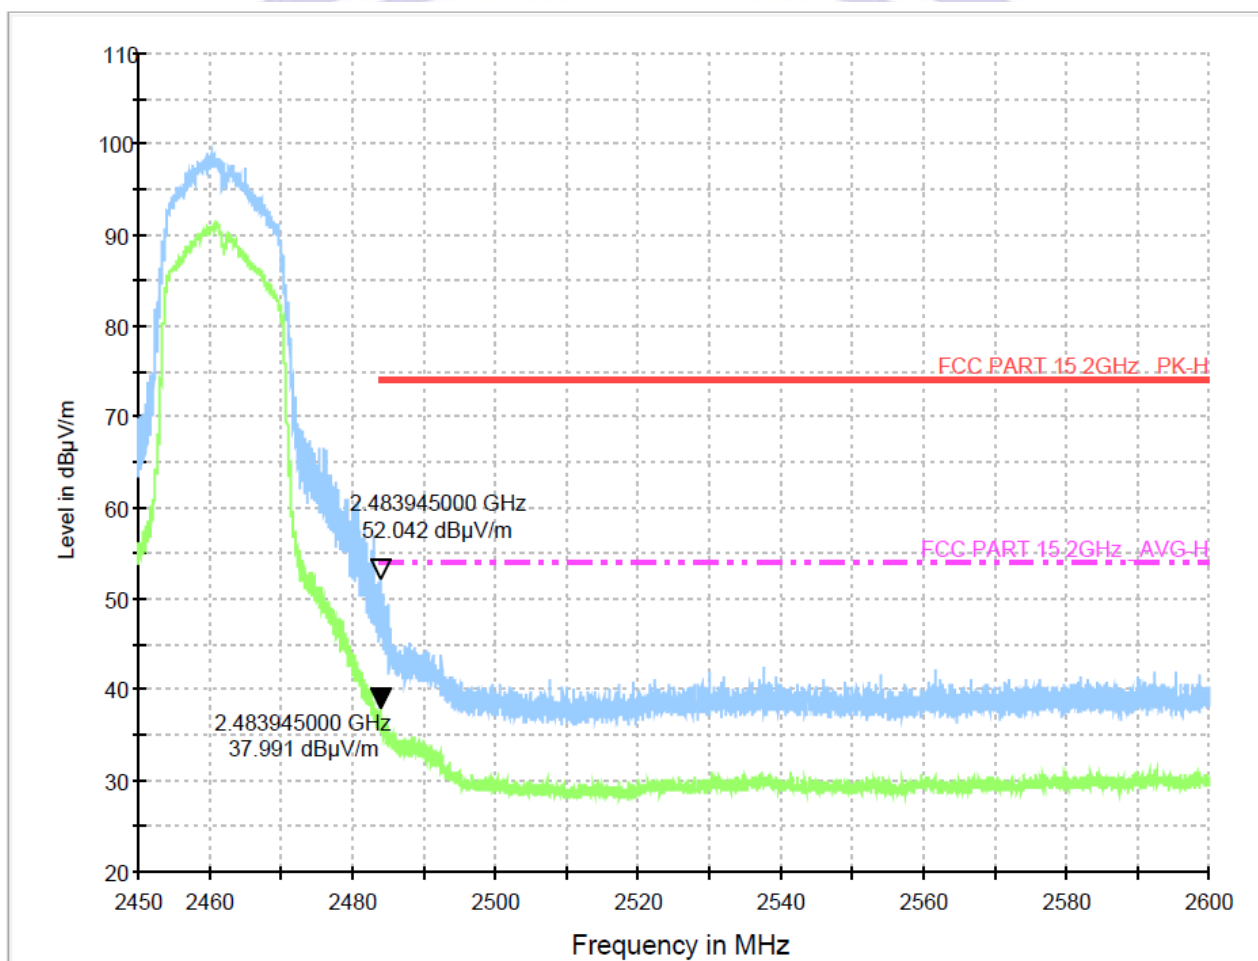

Note:

1. Pre-scan all mode, and found the 802.11G mode which it is worse case, so only show the test data for worse case
2. Pre-scan all Polarization, and found the Horizontal which it is worse case, so only show the test data for worse case


7 Conduct Band Edge And Spurious Emissions Measurement

Test Requirement	:	FCC CFR47 Part 15 Section 15.247
Test Method	:	ANSI C63.10-2020+Cor 1-2023
Test Limit	:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

7.2 Test Setup Blocking



7.3 Test Result

Please see the Appendix for the wifi 2.4g data.

8 6dB&99% Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247, RSS-GEN §6.7& RSS-247

Test Method : ANSI C63.10-2020+Cor 1-2023

Test Limit Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

8.1 Test Procedure


For 6dB Bandwidth Measurement

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: $RBW = 1\%-5\%$ OBW, $VBW \geq 3RBW$

For 99% Bandwidth Measurement

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: $RBW = 1\%-5\%$ OBW, $VBW \geq 3RBW$

8.2 Test Setup Blocking



8.3 Test Result

Please see the Appendix for the wifi 2.4g data.


9 Maximum Output Power

Test Requirement	: FCC CFR47 Part 15 Section 15.247, RSS-247 § 6.3.2
Test Method	: ANSI C63.10-2020+Cor 1-2023
Test Limit	: Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

9.1 Test Procedure

ANSI C63.10-2020, section 11.9.2 Maximum conducted (average) output power

9.2 Test Setup Layout



9.3 Test Result

Please see the Appendix for the wifi 2.4g data.


10 Power Spectral density

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10-2020+Cor 1-2023
Test Limit	: Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz, Span = 1.5 times the OBW.
Sweep = auto; Detector Function = RMS Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

10.2 Test Setup Blocking



10.3 Test Result

Please see the Appendix for the wifi 2.4g data.

11 Antenna Application

11.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

According to RSS-GEN section 6.8

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

11.2 Result

The antenna is Internal antenna, the Max gain of the antennas is 1.95 dBi, reference to the attachment for details.

12 Test Setup and EUT Photos

Reference to the attachment for details.

*****THE END REPORT*****

