FCC PART 22/24 TEST REPORT

FCC Part 22 /Part 24

Report Reference No.:	HK1809271163E	
FCC ID:	2AFD9LITEPRO	
Compiled by (position+printed name+signature) :	File administrators Gary Qian	Gary Qian
Supervised by (position+printed name+signature) :	Technique principal Eden Hu	Eden Hu
Approved by (position+printed name+signature) :	Manager Jason Zhou	Jason Zhou
Date of issue:	Oct. 17, 2018	
Testing Laboratory Name :	Shenzhen HUAK Testing Technology Co., Ltd.	
Address :	1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, China	
Applicant's name :	MOVEON TECHNOLOGY LIMITED	
Address :	World Trade Plaza-A block #3201-3202 Fuhong Road, Futian, Shenzhen, China	
Standard :	FCC Part 22: PUBLIC MOBILE SERVICES FCC Part 24: PERSONAL COMMUNICATIONS SERVICES	

Shenzhen HUAK Testing Technology Co., Ltd. All rights reserved.
This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description :	Smart Phone
Brand Name :	ZOOM
Model	LitePro
Ratings :	DC 3.7V From Battery; DC5V/0.5A
Modulation :	GSM / GPRS :GMSK HSDPA:QPSK/16QAM; HSUPA:BPSK; WCDMA:QPSK
Hardware version:	7130D-MMI-V10
Software version :	Zoom_LitePro_001_20180903
Frequency	GSM 850MHz; PCS 1900MHz; UMTS Band II;UMTS Band V
Result :	PASS

TEST REPORT

Test Report No. : HK1809271163E	Oct. 17, 2018 Date of issue

Equipment under Test	:	Smart Phone
Model /Type	:	LitePro
Applicant	:	MOVEON TECHNOLOGY LIMITED
Address	:	World Trade Plaza-A block #3201-3202 Fuhong Road, Futian, Shenzhen, China
Manufacturer	:	MOVEON TECHNOLOGY LIMITED
Address	:	World Trade Plaza-A block #3201-3202 Fuhong Road, Futian, Shenzhen, China
Factory		MOVEON TECHNOLOGY LIMITED
Address		World Trade Plaza-A block #3201-3202 Fuhong Road, Futian, Shenzhen, China

Test Result:	**PASS**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision	Issue Date	Revisions	Revised By
V1.0	Oct. 17, 2018	Initial Issue	Jason Zhou

TABLE OF CONTENTS

1.VERIFICATION OF COMPLIANCE ..... 错误！未定义书签。
2. GENERAL INFORMATION **6**
2.1 PRODUCT DESCRIPTION 7
2.2RELATED SUBMITTAL(S) / GRANT (S) 8
2.3 TEST METHODOLOGY 9
2.4 TEST FACILITY 10
2.6 SPECIAL ACCESSORIES 11
2.7 EQUIPMENT MODIFICATIONS 11
3. SYSTEM TEST CONFIGURATION **12**
3.1 EUT CONFIGURATION 12
3.2 EUT EXERCISE 12
3.3 CONFIGURATION OF EUT SYSTEM 12
4. SUMMARY OF TEST RESULTS **13**
5. DESCRIPTION OF TEST MODES **14**
6. OUTPUT POWER **15**
6.1 CONDUCTED OUTPUT POWER 15
6.2 RADIATED OUTPUT POWER 21
6.2.1 MEASUREMENT METHOD 21
6.2.2 PROVISIONS APPLICABLE 22
6.3. PEAK-TO-AVERAGE RATIO 25
6.3.1 MEASUREMENT METHOD 25
6.3.2 PROVISIONS APPLICABLE 25
6.3.3 MEASUREMENT RESULT 26
7. OCCUPIED BANDWIDTH **27**
7.1 MEASUREMENT METHOD 27
7.2 PROVISIONS APPLICABLE 27
7.3 MEASUREMENT RESULT 28
8. BAND EDGE **34**
8.1 MEASUREMENT METHOD 34
8.2 PROVISIONS APPLICABLE 34
8.3 MEASUREMENT RESULT 35
9. SPURIOUS EMISSION **38**
9.1 CONDUCTED SPURIOUS EMISSION 38
9.2 RADIATED SPURIOUS EMISSION 53
9.2.2 TEST SETUP 54
10. FREQUENCY STABILITY **59**
10.1 MEASUREMENT METHOD 59

10.2 PROVISIONS APPLICABLE 60
10.3 MEASUREMENT RESULT 61
APPENDIX A: PHOTOGRAPHS OF TEST SETUP 69

1. SUMMARY

1.1 General Remarks

Date of receipt of test sample	:	Sep. 26, 2018
Testing commenced on	:	Sep. 26, 2018
Testing concluded on	:	Oct. 10, 2018

2. SUMMARY

2.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	Smart Phone
Frequency Bands:	☒GSM 850 ☒PCS1900 (U.S. Bands) ☒GSM 900 ☒DCS 1800 (Non-U.S. Bands) ☒UMTS FDD Band II ☐UMTS FDD Band IV ☒UMTS FDD Band V (U.S. Bands) ☒UMTS FDD Band I ☒UMTS FDD Band VIII (Non-U.S. Bands)
Antenna Type	PIFA Antenna
Type of Modulation	GSM / GPRS :GMSK WCDMA : QPSK
Antenna gain	GSM850:0.99dBi; PCS1900: 0.84dBi; WCDMA850: 0.74dBi; WCDMA1900:0.66dBi
Power Supply:	DC 3.7V by battery
Battery parameter:	DC3.7V/2500mAh
Dual Card:	GSM /WCDMA Card Slot GSM Card Slot.
GPRS Class	12
Extreme Vol. Limits:	DC3.4 V to 4.2 V (Normal: DC3.7 V)
Extreme Temp. Tolerance	-10℃ to +50℃
*** Note: 1. The High Voltage DC4.35V and Low Voltage DC3.4V were declared by manufacturer 2. The EUT couldn't be operating normally with higher or lower voltage.	

***** Note:**1.The maximum power levels are GSM for MCS-4: GMSK link, and RMC 12.2kbps mode for WCDMA band II, WCDMA band V, only these modes were used for all tests.

2. We found out the test mode with the highest power level after we analyze all the data rates. So we chose worst cases a representative.

GSM/WCDMA Card1 Slot :

	Maximum ERP/EIRP (dBm)	Max. Conducted Power (dBm)	Max. Average Burst Power (dBm)
GSM 850	31.47	32.39	31.52
PCS 1900	27.69	29.44	28.69
UMTS BAND II	21.58	23.49	22.36
UMTS BAND V	21.69	23.87	21.72

GSM Card2 Slot :

	Maximum ERP/EIRP (dBm)	Max. Conducted Power (dBm)	Max. Average Burst Power (dBm)
GSM 850	30.95	31.79	30.98
PCS 1900	27.21	28.99	28.13

2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID:2AFD9LITEPRO**, filing to comply with the FCC Part 22H&24E requirements.

2.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI/TIA-603-E-2016, and KDB 971168 D01 Power Means License Digital Systems V03R01.

2.4 TEST FACILITY

Site	Shenzhen HUAK Testing Technology Co., Ltd.
Location	1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China
Designation Number	CN1229
Test Firm Registration Number : 616276	

ALL TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Receiver	R&S	ESCI 7	HKE-010	2017/12/28	2018/12/27
LISN	R&S	ENV216	HKE-002	2017/12/28	2018/12/27
Spectrum analyzer	Agilent	N9020A	HKE-048	2017/12/28	2018/12/27
Horn antenna	Schwarzbeck	9120D	HKE-013	2017/12/28	2019/12/26
Preamplifier	EMCI	EMC051845SE	HKE-015	2017/12/28	2018/12/27
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	HKE-087	2017/12/28	2018/12/27
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	2017/12/28	2019/12/26
Spectrum analyzer	Agilent	N9020A	HKE-048	2017/12/28	2018/12/27
Power Sensor	Agilent	E9300A	HKE-086	2017/12/28	2018/12/27
Wireless Communication Test Set	R&S	CMU200	HKE-026	2017/12/28	2018/12/27

2.6 SPECIAL ACCESSORIES

The battery wassupplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

2.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

3. SYSTEM TEST CONFIGURATION

3.1 EUT CONFIGURATION

The EUTconfiguration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

3.3 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System

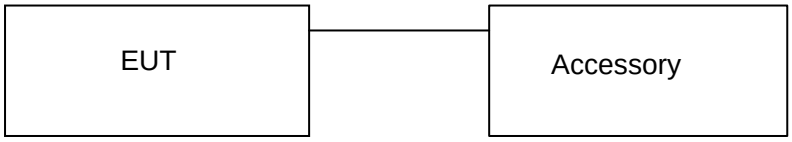

Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Remark
1	Smart Phone	LitePro	2AFD9LITEPRO	EUT
2	Adapter	LitePro	DC 5.0V 1A	Accessory
3	Battery	LitePro	DC 3.7V/2500mAh	Accessory
4	Earphone	N/A	N/A	Accessory
5	USB	N/A	N/A	Accessory

***Note: All the accessories have been used during the test. The following "EUT" in setup diagram means EUT system.

4. SUMMARY OF TEST RESULTS

Item Number	Item Description		FCC Rules	Result
1	Output Power	Conducted Output Power	2.1046	Pass
		Radiated Output Power	22.913(a) (2) / 24.232 (c)	
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)	Pass
3	Spurious Emission	Conducted Spurious Emission	2.1051/22.917/24.238	Pass
		Radiated Spurious Emission		
4	Frequency Stability		2.1055/22.355/24.235	Pass
5	Occupied Bandwidth		2.1049	Pass
6	Band Edge		2.1051/22.917(a)/24.238(a)	Pass

5. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200)to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GSMand PCS frequency band.

*****Note:** GSM/GPRS 850, GSM/GPRS 1900, WCDMA/HSPA band II, WCDMA/HSPA band V,mode have been tested during the test.

The worst condition was recorded in the test report if no other modes test data.

6. OUTPUT POWER

6.1 CONDUCTED OUTPUT POWER

6.1.1 MEASUREMENT METHOD

The transmitter output port was connected to base station.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for othermodulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GSM/GPRS850, GSM/GPRS1900, WCDMA/HSPA band II,WCDMA/HSPA band V)at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

6.1.2 MEASUREMENT RESULT

Conducted Output Power Limits for GPRS 850 band		
Mode	**Nominal Peak Power**	**Tolerance(dB)**
GSM	33 dBm (2W)	- 2
GPRS	33 dBm (2W)	- 2
Conducted Output Power Limits for GPRS 1900band		
Mode	**Nominal Peak Power**	**Tolerance(dB)**
GSM	30 dBm (1W)	- 2
GPRS	30 dBm (1W)	- 2
Conducted Output Power Limits for UMTS band II		
Mode	**Nominal Peak Power**	**Tolerance(dB)**
WCDMA	24dBm (0.25W)	- 2
Conducted Output Power Limits for UMTS band V		
Mode	**Nominal Peak Power**	**Tolerance(dB)**
WCDMA	24dBm (0.25W)	- 2

GSM 850:

Mode	Frequency (MHz)	Reference Power	Peak Power	Tolerance	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
GSM850	824.2	33	32.37	-0.63	31.44	-9	22.44
	836.6	33	32.28	-0.72	**31.52**	-9	22.52
	848.8	33	**32.39**	-0.61	31.34	-9	22.34
GPRS850 (1 Slot)	824.2	33	32.29	-0.71	31.25	-9	22.25
	836.6	33	32.19	-0.81	31.28	-9	22.28
	848.8	33	32.25	-0.75	31.34	-9	22.34
GPRS850 (2 Slot)	824.2	30	29.19	-0.81	28.42	-6	22.42
	836.6	30	29.35	-0.65	28.19	-6	22.19
	848.8	30	29.22	-0.78	28.27	-6	22.27
GPRS850 (3 Slot)	824.2	28.23	27.28	-0.95	26.33	-4.26	22.07
	836.6	28.23	27.33	-0.90	26.42	-4.26	22.16
	848.8	28.23	27.42	-0.81	26.35	-4.26	22.09
GPRS850 (4 Slot)	824.2	27	26.27	-0.73	25.28	-3	22.28
	836.6	27	26.19	-0.81	25.42	-3	22.22
	848.8	27	26.21	-0.79	25.38	-3	22.38

PCS 1900:

Mode	Frequency (MHz)	Reference Power	Peak Power	Tolerance	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
GSM1900	1850.2	30	**29.44**	-0.56	**28.69**	-9	19.69
	1880	30	29.06	-0.94	28.54	-9	19.54
	1909.8	30	29.71	-0.29	28.46	-9	19.46
GPRS1900 (1 Slot)	1850.2	30	28.79	-1.21	27.28	-9	18.28
	1880	30	28.78	-1.22	27.17	-9	18.17
	1909.8	30	28.49	-1.51	27.37	-9	18.37
GPRS1900 (2 Slot)	1850.2	27	25.25	-1.75	24.42	-6	18.42
	1880	27	25.14	-1.86	24.25	-6	18.25
	1909.8	27	25.33	-1.67	24.54	-6	18.54
GPRS1900 (3 Slot)	1850.2	25.23	24.27	-0.96	23.39	-4.26	19.13
	1880	25.23	24.44	-0.79	23.47	-4.26	19.21
	1909.8	25.23	24.19	-1.04	23.56	-4.26	19.30
GPRS1900 (4 Slot)	1850.2	24	23.57	-0.43	22.74	-3	19.74
	1880	24	23.39	-0.61	22.58	-3	19.58
	1909.8	24	23.46	-0.54	22.55	-3	19.55

UMTS BAND II

Mode	Frequency (MHz)	Reference power	Peak Power	Tolerance	Avg.Burst Power
WCDMA1900 RMC	1852.4	24	23.23	-0.77	22.11
	1880	24	**23.49**	-0.51	**22.36**
	1907.6	24	23.47	-0.53	22.28
WCDMA1900 AMR	1852.4	24	23.32	-0.68	22.18
	1880	24	23.12	-0.88	22.23
	1907.6	24	23.37	-0.63	22.12
HSDPA Subtest 1	1852.4	24	21.32	-2.68	21.56
	1880	24	21.32	-2.68	21.47
	1907.6	24	21.08	-2.92	21.48
HSDPA Subtest 2	1852.4	24	22.24	-1.76	20.33
	1880	24	22.26	-1.74	20.26
	1907.6	24	22.18	-1.82	20.28
HSDPA Subtest 3	1852.4	24	22.33	-1.67	20.05
	1880	24	22.03	-1.97	20.11
	1907.6	24	22.09	-1.91	20.10
HSDPA Subtest 4	1852.4	24	22.11	-1.89	20.53
	1880	24	22.54	-1.46	20.49
	1907.6	24	22.13	-1.87	20.58
HSUPA Subtest 1	1852.4	24	22.02	-1.98	20.44
	1880	24	21.06	-2.94	20.39
	1907.6	24	22.99	-1.01	20.43
HSUPA Subtest 2	1852.4	24	22.48	-1.52	21.00
	1880	24	22.19	-1.81	21.06
	1907.6	24	22.51	-1.49	21.33
HSUPA Subtest 3	1852.4	24	22.45	-1.55	21.58
	1880	24	22.40	-1.60	21.47
	1907.6	24	21.46	-2.54	21.61
HSUPA Subtest 4	1852.4	24	22.12	-1.88	21.53
	1880	24	22.22	-1.78	22.47
	1907.6	24	22.49	-1.51	22.33
HSUPA Subtest 5	1852.4	24	22.41	-1.59	21.17
	1880	24	22.47	-1.53	21.28
	1907.6	24	22.33	-1.67	21.23

UMTS BAND V

Mode	Frequency (MHz)	Reference power	Peak Power	Tolerance	Avg.Burst Power
WCDMA850 RMC	826.4	24	23.62	-0.41	21.58
	836.4	24	23.46	-0.45	21.11
	846.6	24	**23.87**	-0.23	**21.72**
WCDMA850 AMR	826.4	24	23.66	-1.00	21.18
	836.4	24	23.49	-0.91	21.33
	846.6	24	23.31	-0.89	21.15
HSDPA Subtest 1	826.4	24	22.77	-1.66	20.14
	836.4	24	22.50	-1.51	20.21
	846.6	24	22.62	-1.48	20.27
HSDPA Subtest 2	826.4	24	22.63	-1.71	19.95
	836.4	24	22.21	-1.58	20.07
	846.6	24	22.82	-1.75	20.03
HSDPA Subtest 3	826.4	24	21.79	-2.67	20.62
	836.4	24	21.58	-2.56	20.26
	846.6	24	21.82	-2.04	20.50
HSDPA Subtest 4	826.4	24	22.93	-1.89	20.62
	836.4	24	22.99	-1.71	20.37
	846.6	24	22.86	-1.66	20.51
HSUPA Subtest 1	826.4	24	22.49	-1.78	20.53
	836.4	24	22.34	-1.86	21.52
	846.6	24	22.63	-1.45	20.97
HSUPA Subtest 2	826.4	24	22.71	-1.97	20.85
	836.4	24	22.59	-1.9	20.99
	846.6	24	22.16	-1.91	21.00
HSUPA Subtest 3	826.4	24	22.04	-1.82	20.87
	836.4	24	22.06	-1.87	20.61
	846.6	24	22.06	-1.89	20.66
HSUPA Subtest 4	826.4	24	22.33	-1.67	20.78
	836.4	24	22.34	-1.66	20.32
	846.6	24	22.32	-1.68	20.87
HSUPA Subtest 5	826.4	24	22.90	-1.42	20.43
	836.4	24	22.54	-1.53	20.51
	846.6	24	22.42	-1.4	20.26

According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	0≤ CM≤3.5	MAX(CM-1,0)
Note: CM=1 for β_c/β_d=12/15,β_{hs}/β_c=24/15.For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

6.2 RADIATED OUTPUT POWER

6.2.1 MEASUREMENT METHOD

The measurements procedures specified in ANSI/TIA-603-E-2016 were applied.

1. Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signal operating below 1GHz are performed using dipole antennas. Measurements on signals operating above 1GHz are performed using broadband horn antennas. All measurements are performed as RMS average measurements while the EUT operating at its maximum duty cycle, at maximum power, and at the approximate frequencies.
2. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (Pin) is applied to the input of the dipole, and the power received (Pr) at the chamber's probe antenna is recorded.
3. The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as ARpl=Pin + 2.15 - Pr. TheARpl is the attenuation of “reference path loss”, and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: Power=PMea+ARpl
4. The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
5. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
6. The EUT is then put into continuously transmitting mode at its maximum power level.
7. Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
8. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (Pin).
9. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi...

6.2.2 PROVISIONS APPLICABLE

Mode	FCC Part Section(s)	Nominal Peak Power
GSM/GPRS 850	22.913(a)(2)	<=38.45dBm (7W). ERP
GSM/GPRS 1900	24.232(c)	<=33dBm (2W). EIRP
UMTS BAND II	24.232(c)	<=33dBm (2W),EIRP
UMTS BANDV	22.913(a)(2)	<=38.45dBm (7W).ERP

6.2.3 MEASUREMENT RESULT

Radiated Power (ERP) for GSM/GPRS 850				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GSM	824.2	**31.47**	Horizontal	Pass
	836.6	31.33	Horizontal	Pass
	848.8	31.31	Horizontal	Pass
	824.2	28.44	Vertical	Pass
	836.6	28.49	Vertical	Pass
	848.8	28.53	Vertical	Pass
GPRS	824.2	25.28	Horizontal	Pass
	836.6	25.49	Horizontal	Pass
	848.8	25.54	Horizontal	Pass
	824.2	23.36	Vertical	Pass
	836.6	23.37	Vertical	Pass
	848.8	23.55	Vertical	Pass

Radiated Power (E.I.R.P) for GSM/GPRS 1900				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
GSM	1850.2	27.58	Horizontal	Pass
	1880.0	**27.69**	Horizontal	Pass
	1909.8	27.47	Horizontal	Pass
	1850.2	24.36	Vertical	Pass
	1880.0	24.42	Vertical	Pass
	1909.8	24.38	Vertical	Pass
GPRS	1850.2	23.55	Horizontal	Pass
	1880.0	23.49	Horizontal	Pass
	1909.8	23.66	Horizontal	Pass
	1850.2	21.53	Vertical	Pass
	1880.0	21.48	Vertical	Pass
	1909.8	21.58	Vertical	Pass

Radiated Power (E.I.R.P) for UMTS band II				
Mode	**Frequency**	**Result**		**Conclusion**
		Max. Peak E.I.R.P (dBm)	**Polarization Of Max. E.I.R.P**	
UMTS	1852.4	21.44	Horizontal	Pass
	1880	21.53	Horizontal	Pass
	1907.6	**21.58**	Horizontal	Pass
	1852.4	19.77	Vertical	Pass
	1880	19.69	Vertical	Pass
	1907.6	19.78	Vertical	Pass

Radiated Power (ERP) for UMTS band V				
Mode	**Frequency**	**Result**		**Conclusion**
		Max. Peak ERP (dBm)	**Polarization Of Max. ERP**	
UMTS	826.4	21.43	Horizontal	Pass
	836.4	21.28	Horizontal	Pass
	846.6	**21.69**	Horizontal	Pass
	826.4	19.44	Vertical	Pass
	836.4	19.53	Vertical	Pass
	846.6	19.47	Vertical	Pass

Note: Above is the worst mode data.

6.3. PEAK-TO-AVERAGE RATIO

6.3.1 MEASUREMENT METHOD

Use one of the procedures presented in 4.1 to measure the total peak power and record as PPk. Use one of the applicable procedures presented 4.2 to measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

PAPR (dB) = PPk (dBm) - PAvg (dBm).

6.3.2 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument’s resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

6.3.3 MEASUREMENT RESULT

Modes	GSM850(GSM)		
Channel	128	190	251
	(Low)	(Mid)	(High)
Frequency (MHz)	824.2	836.6	848.8
Peak-To-Average Ratio (dB)/GSM	1.33	1.28	1.27
Peak-To-Average Ratio (dB)/GRPS	1.44	1.36	1.19

Modes	PCS1900 (GSM)		
Channel	512	661	810
	(Low)	(Mid)	(High)
Frequency (MHz)	1850.2	1880	1909.8
Peak-To-Average Ratio (dB)/GSM	0.52	0.47	0.39
Peak-To-Average Ratio (dB)/GPRS	1.00	1.23	1.41

Modes	UMTS BAND II		
Channel	9262	9400	9538
	(Low)	(Mid)	(High)
Frequency (MHz)	1852.4	1880	1907.6
Peak-To-Average Ratio (dB)	1.12	1.17	1.28

Modes	UMTS BAND V		
Channel	4132	4182	4233
	(Low)	(Mid)	(High)
Frequency (MHz)	826.4	836.4	846.6
Peak-To-Average Ratio (dB)	1.23	1.53	1.47

7. OCCUPIED BANDWIDTH

7.1 MEASUREMENT METHOD

1. The Occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper Frequency limits, the mean power radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

2. RBW=1~5% of the expected OBW, VBW>=3 x RBW, Detector=Peak, Trace mode=max hold, Sweep=auto couple, and the trace was allowed to stabilize.

7.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

7.3 MEASUREMENT RESULT

Test Results

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
GSM850	GSM	LCH	246.93	317.1	PASS
		MCH	247.34	308.6	PASS
		HCH	248.01	312.8	PASS
	GRPS	LCH	246.73	315.5	PASS
		MCH	246.40	315.8	PASS
		HCH	246.74	313.3	PASS

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
GSM1900	GSM	LCH	245.12	319.2	PASS
		MCH	243.64	304.2	PASS
		HCH	244.59	314.3	PASS
	GRPS	LCH	245.57	315.9	PASS
		MCH	246.10	318.5	PASS
		HCH	248.95	315.8	PASS

For GSM

Test Band=GSM850/PCS1900

Test Mode=GSM/GPRS

GSM 850-LCH-GSM	GSM 850-MCH-GSM
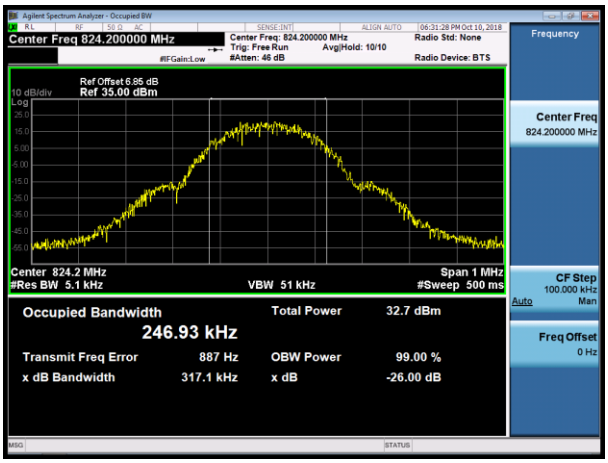	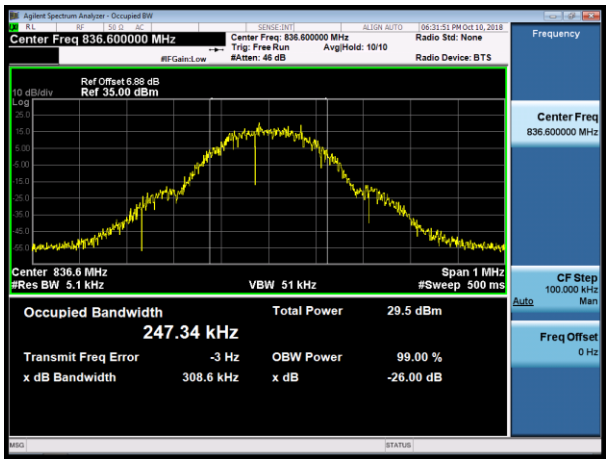
GSM 850-HCH-GSM	**GSM 850-LCH- GPRS**
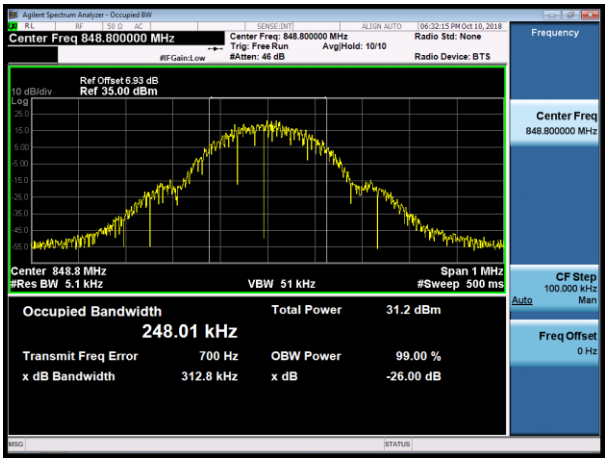	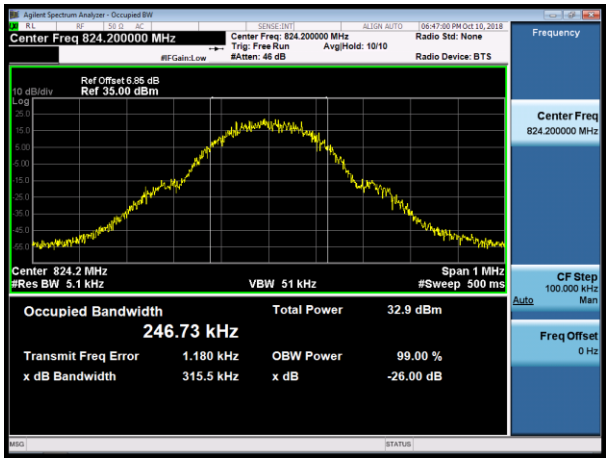

GSM 850-MCH-GPRS	GSM 850-HCH- GPRS
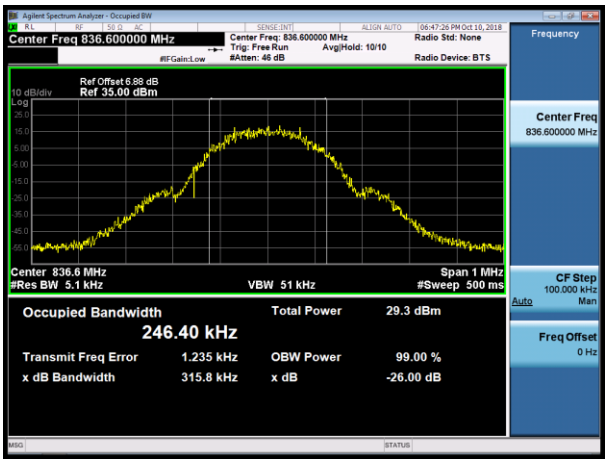	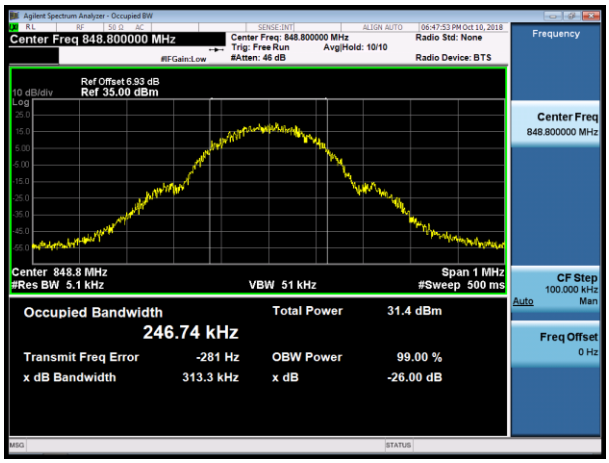

GSM 1900-LCH-GSM	GSM 1900-MCH-GSM
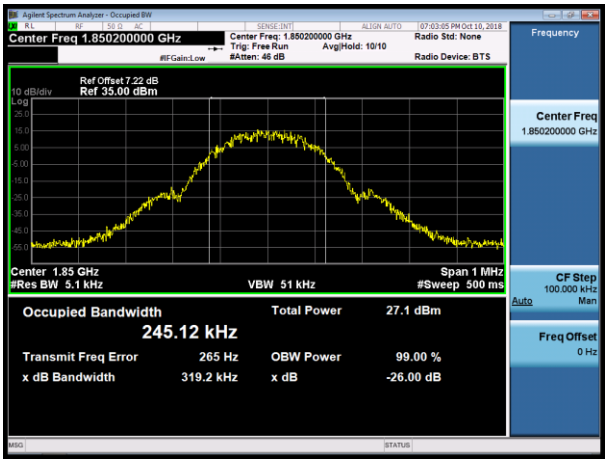	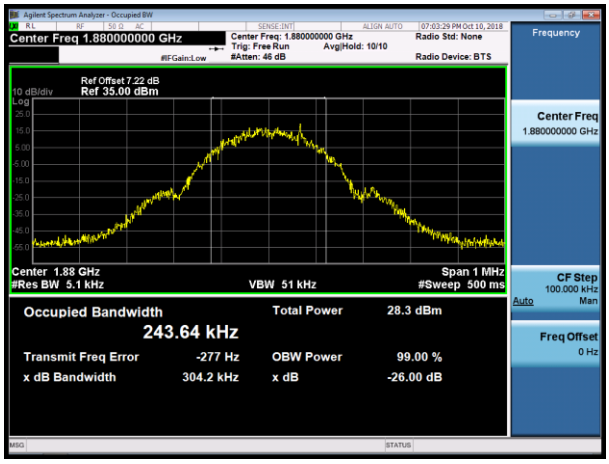

GSM 1900-HCH-GSM	GSM 1900-LCH-GPRS
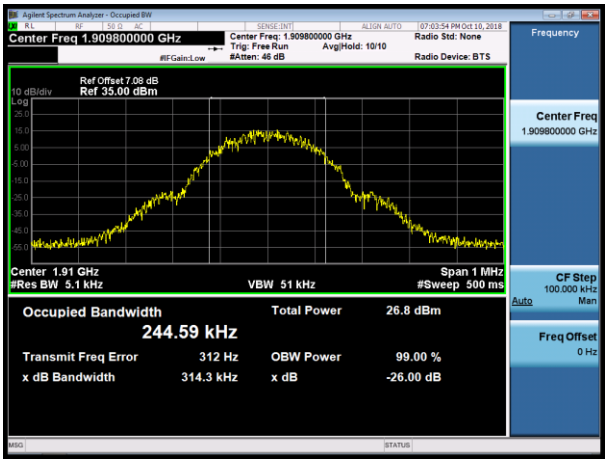	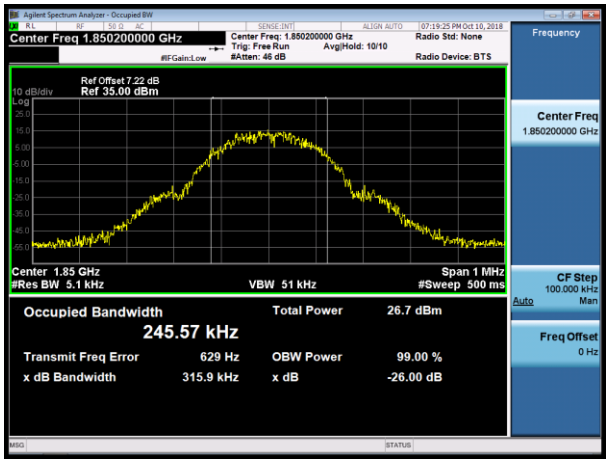

GSM 1900-MCH-GPRS	GSM 1900-HCH-GPRS
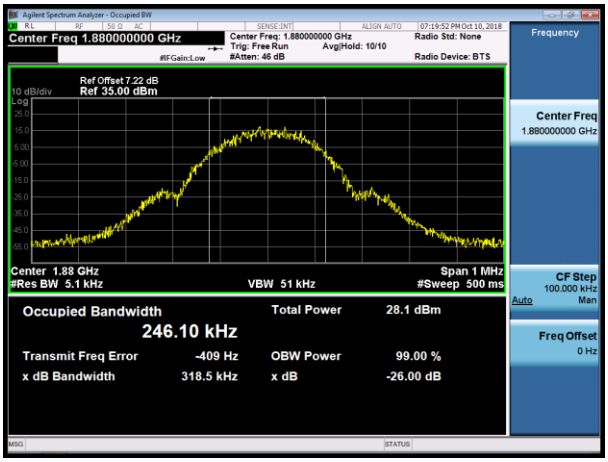	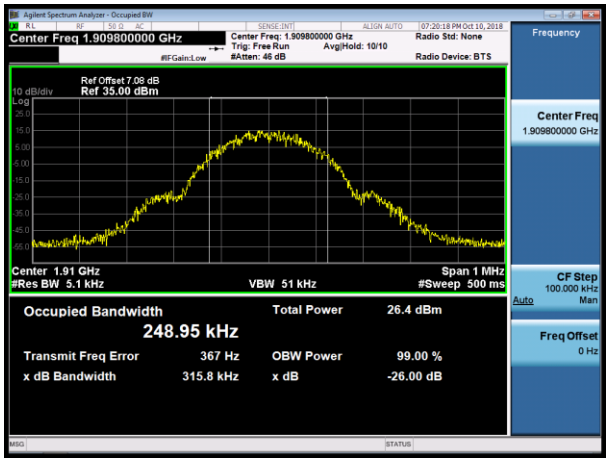

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
WCDMA 850	UMTS	LCH	4163.8	4687	PASS
		MCH	4155.9	4691	PASS
		HCH	4156.3	4684	PASS

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
WCDMA 1900	UMTS	LCH	4209.4	4762	PASS
		MCH	4171.1	4742	PASS
		HCH	4204.9	4752	PASS

For WCDMA

Test Band=WCDMA850/WCDMA1900

Test Mode=UMTS

WCDMA 850-LCH	WCDMA 850-MCH
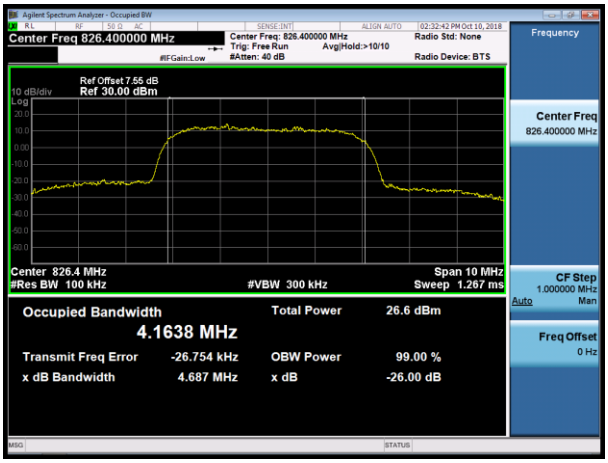	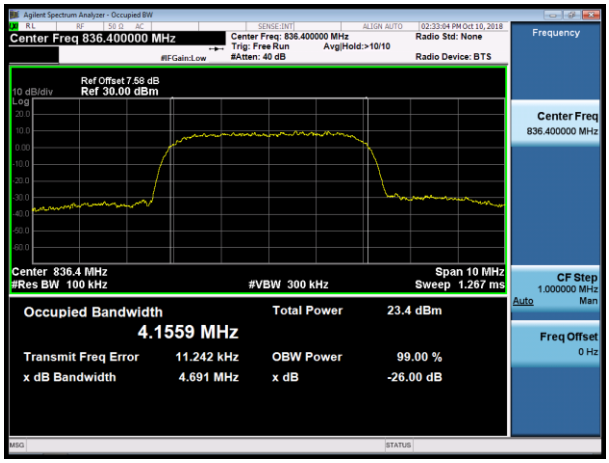

WCDMA 850-HCH	WCDMA 1900-LCH
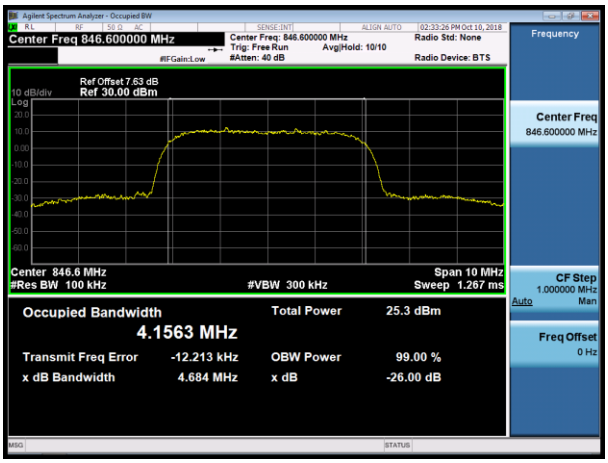	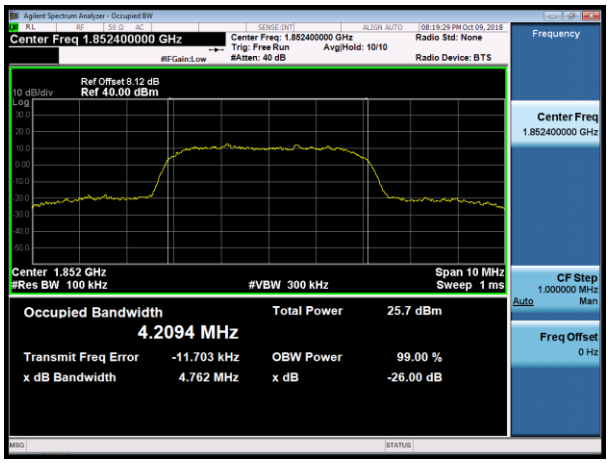

WCDMA 1900-MCH	WCDMA 1900-HCH
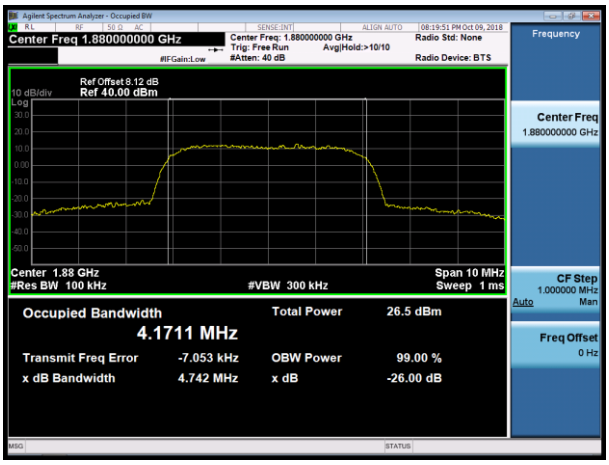	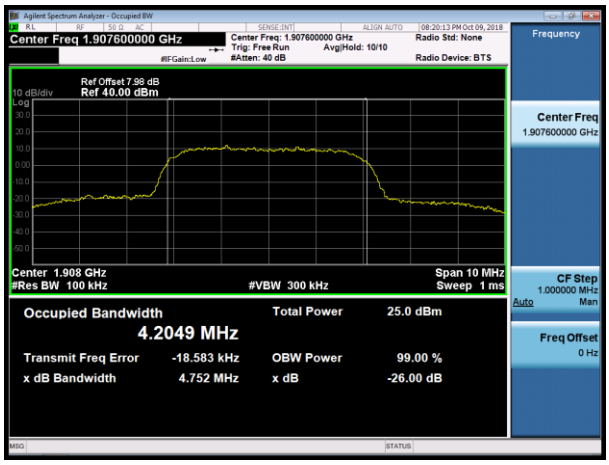

8. BAND EDGE

8.1 MEASUREMENT METHOD

1. All out of band emissions are measured with an analyzer spectrum connected to the antenna terminal of the EUT while the EUT at its maximum duty cycle, at maximum power, and at the approximate frequencies. All data rates were investigated to determine the worst case configuration
2. The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.
3. Start and stop frequency were set such that the band edge would be placed in the center of the plot.
4. Span was set large enough so as to capture all out of band emissions near the band edge.
5. RBW>1% of the emission bandwidth, VBW >=3 x RBW, Detector=RMS, Number of points>=2 x Span/RBW, Trace mode=max hold, Sweep time=auto couple, and the trace was allowed to stabilize

8.2 PROVISIONS APPLICABLE

As Specified in FCC rules of 22.917(a) 、24.238(a)and KDB 971168 D1 V03R01.