



Band26a 10MHz 16QAM HCH 819MHz RB 1 49 NTNV

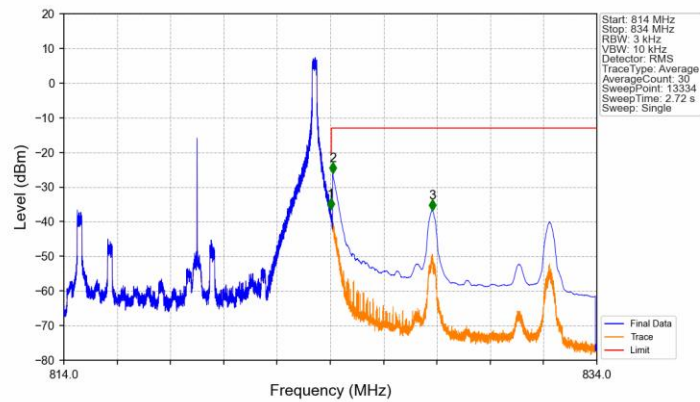

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
814	824	0.003	/	/	/	/	/	/
824	824.038	0.003	/	1	824.013	-36.48	-20	Pass
824.038	825	0.1	CHP	2	824.088	-26.09	-13	Pass
825	834	0.1	CHP	3	827.818	-36.74	-13	Pass

Band26a 10MHz 16QAM HCH 819MHz RB 50 0 NTNV

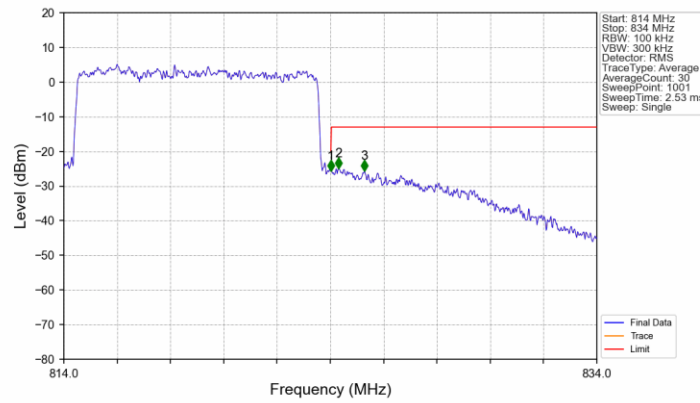

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
814	824	0.1	/	/	/	/	/	/
824	824.038	0.1	/	1	824.020	-25.70	-20	Pass
824.038	825	0.1	/	2	824.300	-24.93	-13	Pass
825	834	0.1	/	3	825.280	-25.58	-13	Pass

7. Form731

7.1 Test Result

7.1.1 Form731_Power

Band	BW	Lower Freq	High Freq	MAX Power (W)	Value	Hz/ppm	Emission Designator	Rule Parts	MAX Power (dBm)
26a	1.4	814.7	823.3	0.2193	0.0127	ppm	1M13G7D	/	23.41
26a	1.4	814.7	823.3	0.1778	0.0137	ppm	1M12W7D	/	22.50
26a	3	815.5	822.5	0.2218	0.0136	ppm	2M76G7D	/	23.46
26a	3	815.5	822.5	0.1746	0.0154	ppm	2M75W7D	/	22.42
26a	5	816.5	821.5	0.2138	0.0125	ppm	4M57G7D	/	23.30
26a	5	816.5	821.5	0.1614	0.0130	ppm	4M60W7D	/	22.08
26a	10	819	819	0.2183	0.0118	ppm	9M08G7D	/	23.39
26a	10	819	819	0.1977	0.0094	ppm	9M06W7D	/	22.96

7.1.2 Form731_ERP

Band	BW	Lower Freq	High Freq	MAX Power (W)	Value	Hz/ppm	Emission Designator	Rule Parts	MAX Power (dBm)
26a	1.4	814.7	823.3	0.2070	0.0127	ppm	1M13G7D	/	23.16
26a	1.4	814.7	823.3	0.1679	0.0137	ppm	1M12W7D	/	22.25
26a	3	815.5	822.5	0.2094	0.0136	ppm	2M76G7D	/	23.21
26a	3	815.5	822.5	0.1648	0.0154	ppm	2M75W7D	/	22.17
26a	5	816.5	821.5	0.2018	0.0125	ppm	4M57G7D	/	23.05
26a	5	816.5	821.5	0.1524	0.0130	ppm	4M60W7D	/	21.83
26a	10	819	819	0.2061	0.0118	ppm	9M08G7D	/	23.14
26a	10	819	819	0.1866	0.0094	ppm	9M06W7D	/	22.71

***** End of Report *****