



Product specifications:

- Pairing name:MERKURY BT150
- BT: 5.3
- Working distance: 10M
- Battery:3.7V 1200mAh
- Speaker driver : Ø 52 mm*2
- Power 4Ω, 5W
- Frequency response: 120 Hz-18KHz
- Unit size: 106mm*96mm*224mm
- Unit weight: 1.49lbs
- Charging: 5V/1000mA
- Charging time: around 2 hours
- Normal volume Playing time: around 2 hours

Product Feature:

1. International advanced BT chip and circuit design techniques, support all BT device ;
2. Built-in Low-freq radiators, Super dynamic low-frequency sound pressure gain, listening transparent and flexible.
3. Can play music after pairing with BT device .for example mobile/ MID/ TV, the working distance is more than 10M.
4. Support AUX IN audio input
5. Built-in MP3 decoding, can directly play TF card, U disk
6. Build-in the FM radio module, convenient to auto scan and save radio channels.
7. with Mic for hands-free phone call function.
8. support TWS

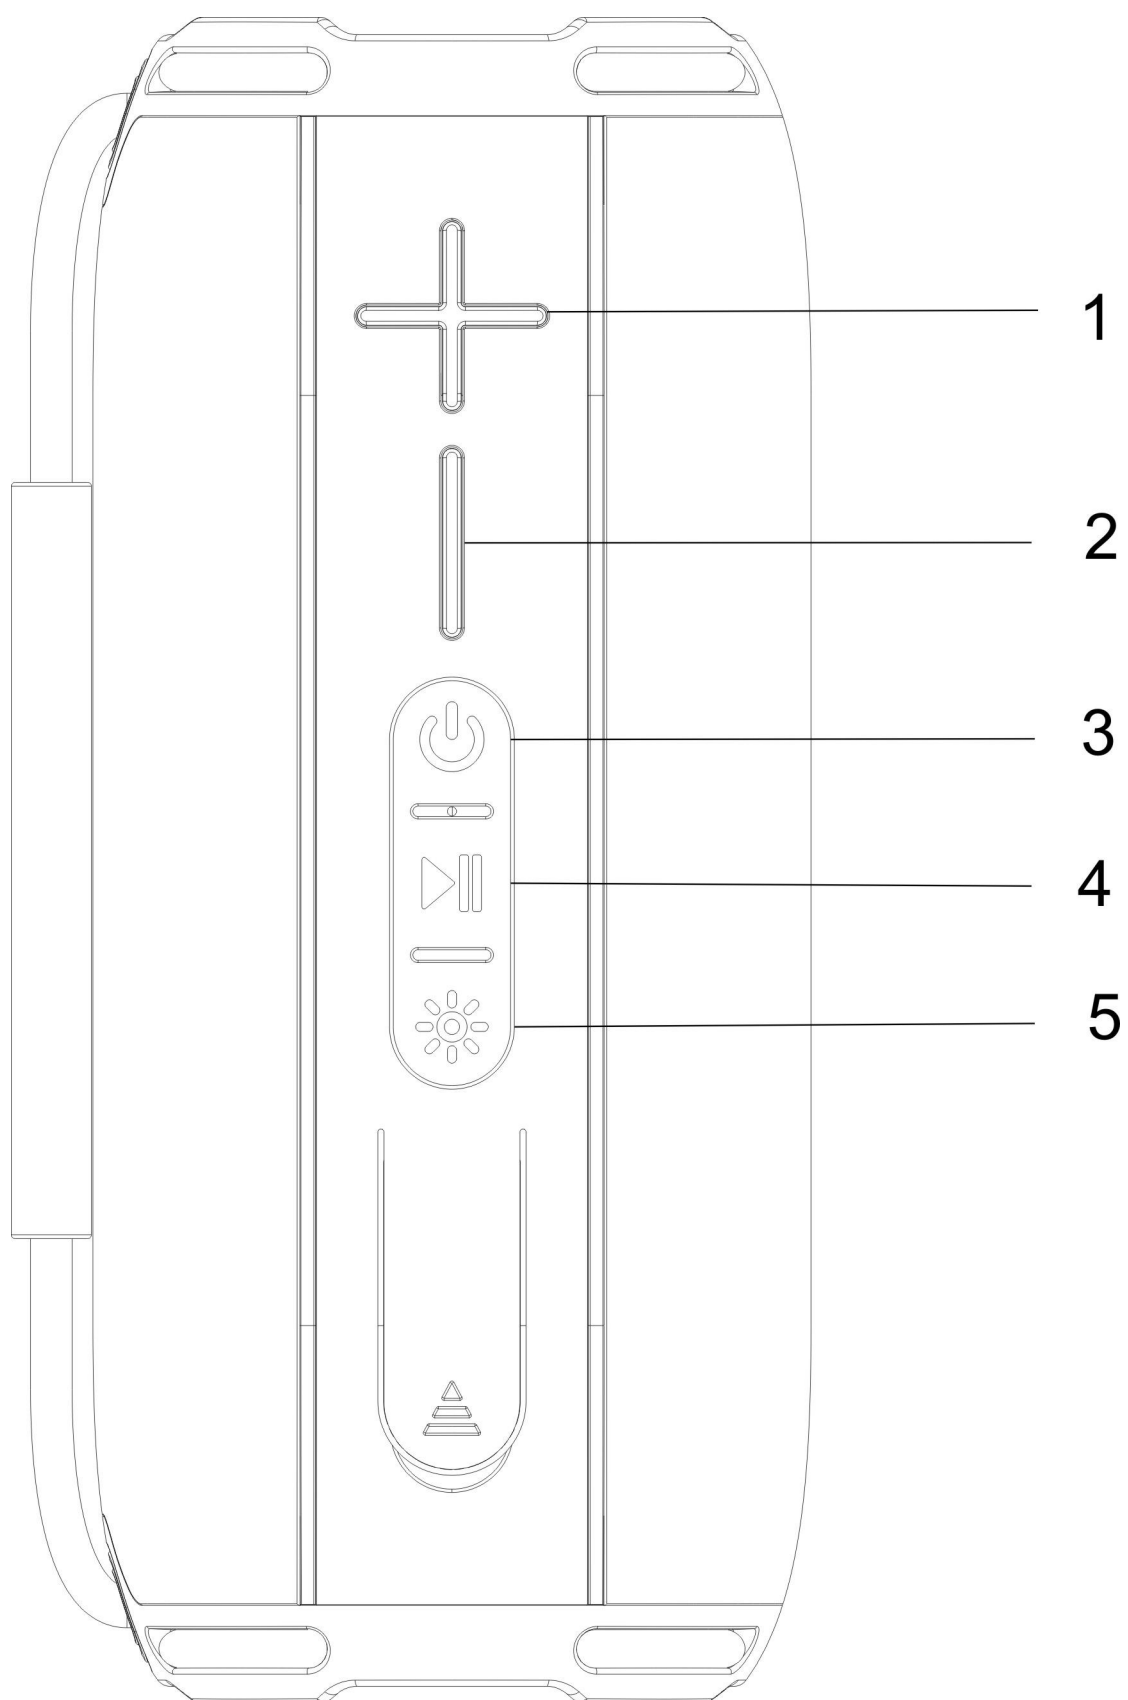

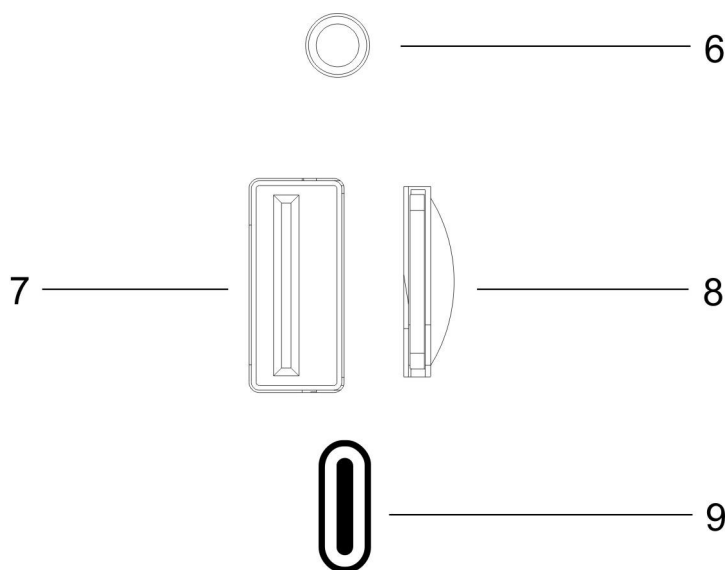

key & slot function:

1. Plus-Short Press to Raise Volume / Long press to Next track
2. Minus-Short Press to Lower Volume / Long press to Previous Track
3. Power-Long press to turn the Speaker on or off / Short press to switch mode (BT/ FM/ USB disk/TF card/Aux)
4. Play/Pause-Play/Pause the Music.

Under BT mode with mobile paired, when call comes, press to answer a call hands-free, press again to hand up, press twice to ring up a call.

In FM mode, press to search station automatically, press again to stop searching.

Keep the two speakers under BT mode without pairing, Long press the play/pause for 3 seconds either of the speaker until hear a hint and meantime the button light stops flashing, now is in TWS mode, then can pair the mobile.

5. Light button-Short press to change light mode / Long press to turn the light on or off
6. Aux 3.5mm port
7. USB disk port
8. TF card port
9. Type-C charging port

TWS FUNCTION

Turn on two speakers then hold press for 3 seconds one of speaker play/pause button, you will hear the sound of the speaker. And wait a moment, then both speakers produce a hint sound, one of the speaker blue indicator light turns to solid. Open your device and search for "MERKURY BT150" to connect, an alert will sound indicating speaker is connected, then you can start to play music through the speaker

Simply plug in your USB drive, TF card or AUX audio device for instant auto playback.

In USB, TF card and AUX modes, short press +/- keys to adjust the volume.

Long press +/- to switch tracks in USB/TF mode; not supported in AUX mode.

FM stations searching

1. Press the Power button to enter FM mode.
2. Press Play/pause and the speaker will automatically search and save radio stations.
3. Long Press + for next station, Long Press - for previous station
4. For stronger radio signals, connect the AUX cable into the AUX port. The cable works as an antenna and improves FM reception.

LIGHT Modes: 9 light modes

1. Short press the light button to cycle through the modes.
2. Long press the light button to turn ON/OFF the light without cycling through the modes.
3. There are nine modes that can be converted.

CHARGING

To charge your speaker, connect one end of the provided Type-C cable to a USB power source. When the speaker is charging, the LED charging indicator will glow red. When it is fully charged, the indicator light will turn off.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC

Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF warning for Portable device:

The device has been evaluated to meet general RF exposure requirement.

The device can be used in portable exposure condition without restriction.