

# SOLUM Newton Pro Full Color Electronic Shelf Label Datasheet

11/09/2024

## Summary

This datasheet presents the general performance and specifications of Newton Pro-Label for SOLUM Electronic Shelf Label (ESL) System.



© SOLUM. All rights reserved

*The names of actual companies and Products mentioned herein may be the trademarks of their respective owners.*

*No part of this document may be reProduced, stored in a retrieval system, or transmitted in any form or by any means without the express written consent of SOLUM*

***This document is subject to change without notice.***

**THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.**

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR SOLUM REPRESENTATIVE FOR A COPY.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. SOLUM AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL SOLUM OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF SOLUM OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

SOLUM and the SOLUM logo are trademarks or registered trademarks of SOLUM and/or its affiliates in the KOREA and other countries. Third-party trademarks mentioned are the Property of their respective owners. The use of the word partner does not imply a partnership relationship between SOLUM and any other company.

**©2016-2024 SOLUM Co Ltd, Inc. All rights reserved.**

## Table of Contents

|          |                                                         |           |
|----------|---------------------------------------------------------|-----------|
| <b>1</b> | <b>PREFACE .....</b>                                    | <b>5</b>  |
| 1.1      | ABOUT THIS GUIDE .....                                  | 5         |
| 1.2      | AUDIENCE .....                                          | 5         |
| 1.3      | ABBREVIATIONS AND ACRONYMS .....                        | 5         |
| <b>2</b> | <b>OVERVIEW .....</b>                                   | <b>6</b>  |
| <b>3</b> | <b>SPECIFICATION .....</b>                              | <b>7</b>  |
| 3.1      | PRODUCT SPECIFICATION .....                             | 7         |
| 3.2      | RADIO (RF) SPECIFICATION.....                           | 8         |
| 3.3      | NFC SPECIFICATION .....                                 | 8         |
| 3.4      | FEATURES .....                                          | 9         |
| 3.5      | MECHANICAL DRAWING .....                                | 10        |
| 3.6      | LABEL MARKING.....                                      | 14        |
| 3.7      | INITIAL DISPLAY IMAGE.....                              | 15        |
| 3.8      | CERTIFICATIONS .....                                    | 15        |
| <b>4</b> | <b>PACKAGING .....</b>                                  | <b>18</b> |
| 4.1      | 4.0" .....                                              | 18        |
| 4.2      | 7.3" .....                                              | 19        |
| 4.3      | 8.2" .....                                              | 20        |
| 4.4      | 13.3" .....                                             | 21        |
| <b>5</b> | <b>RELIABILITY TEST .....</b>                           | <b>22</b> |
| <b>6</b> | <b>PRODUCT HANDLING PRECAUTIONS.....</b>                | <b>23</b> |
| 6.1      | USAGE ENVIRONMENT .....                                 | 23        |
| 6.2      | STORAGE AND USE .....                                   | 23        |
| 6.3      | PRODUCT CLEANING .....                                  | 24        |
| 6.4      | BATTERY REPLACEMENT .....                               | 25        |
| <b>7</b> | <b>BATTERY HANDLING GUIDE.....</b>                      | <b>26</b> |
| 7.1      | AVOIDING HAZARDS IN LITHIUM BATTERY HANDLING.....       | 26        |
| 7.2      | PROPER STORING AND DISPOSING OF LITHIUM BATTERIES ..... | 28        |

**Document History**

| Rev.        | Date       | Revision History    | Page |
|-------------|------------|---------------------|------|
| Preliminary | 11/09/2024 | Preliminary release | -    |

# 1 Preface

## 1.1 About This Guide

This datasheet presents the specification and general performance of SOLUM's Newton Pro Electronic Shelf Labels (ESLs) lineup.

## 1.2 Audience

This manual is intended for any user (IT, operations, store managers, installers, etc.) authorized to operate and install SOLUM ESLs.

## 1.3 Abbreviations and Acronyms

| Terminology/Abbreviation | Description            |
|--------------------------|------------------------|
| GW                       | Gateway                |
| ESL                      | Electronic Shelf Label |
| RF                       | Radio Frequency        |
| IT                       | Information Technology |
| PoE                      | Power over Ethernet    |
| TBD                      | To Be Decided          |

## 2 Overview

SOLUM Newton Pro Full Color Electronic Shelf Labels (ESLs) are components to a total SOLUM's ESL System. The SOLUM's ESL System consists of the ESLs, Gateway(s), Server, and optional accessories (such as the Newton Pro Full Color Remote Controller) and is used to electronically displays key information such as price and Product information, that are traditionally printed or written on paper in environments like supermarkets, warehouses, and factories.

SOLUM's Newton Pro Full Color ESLs are the industry leading solutions that provide the longest battery life (beyond 10 years), fastest update speed, built in LEDs, built in button IP68 rating for various environments, multiple pages per ESL, and more to take the operation beyond just displaying information on the ESLs with a wide range of colors.

Newton Pro Full Color ESLs come in various sizes and colors to meet all customer use cases. They are battery powered for ease of deployment and wirelessly receive updates from SOLUM Gateway for.



**Figure 1. Newton Pro Full Color Product LINE-UP**

## 3 Specification

This section details specification of each ESL by size. ESLs are identified by the diagonal measurement of the display in inches. For example, a 2.9" ESL is referring to an ESL with the diagonal display dimension of 2.9".

### 3.1 Product Specification

| Item                                       | Description                                                                                                                                                                                                                                                                                                                       |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Label Dimensions</b><br>(W x H x D(mm)) | <b>4.0"</b> : 110.4 x 72.26 x 14.5 mm (4.35 x 2.84 x 0.57 inch)<br><b>7.3"</b> : 125.0 x 182.9 x 15.95 mm (4.92 x 7.20 x 0.63 inch)<br><b>8.2"</b> : 139.5 x 208.3 x 15.95 mm (5.49 x 8.20 x 0.63 inch)<br><b>13.3"</b> : 223.2 x 300.8 x 16.5 mm (8.79 x 11.84 x 0.65 inch)                                                      |
| <b>Display Dimensions</b><br>(W x H(mm))   | <b>4.0"</b> : 600 x 400 Pixel (180dpi) /<br>84.6 x 56.4 mm (3.33 x 2.22 inch)<br><b>7.3"</b> : 480 x 800 Pixel (127dpi) / 96.0 x 160.0 mm (3.78 x 6.30 inch)<br><b>8.2"</b> : 576 x 1024 Pixel (144dpi) / 101.4 x 180.2 mm (3.99 x 7.09 inch)<br><b>13.3"</b> : 1200 x 1600 Pixel (150dpi) / 202.8 x 270.4 mm (7.98 x 10.64 inch) |
| <b>Label Weight</b>                        | <b>4.0"</b> : 87.3g<br><b>7.3"</b> : 231.7g<br><b>8.2"</b> : 239.7g<br><b>13.3"</b> : 788.1g                                                                                                                                                                                                                                      |
| <b>Viewing Angle</b>                       | Nearly 180°                                                                                                                                                                                                                                                                                                                       |
| <b>Display Colors</b>                      |  KWR YGB (black, white, red, yellow, green, blue)                                                                                                                                                                                              |
| <b>Battery</b>                             | Type and quantity of batteries defer based on ESL<br><br><b>4.0"</b> : CP 1500mAh<br><b>7.3"</b> : CP 3500mAh<br><b>8.2"</b> : CP 3500mAh<br><b>13.3"</b> : CP 7000mAh                                                                                                                                                            |
| <b>Wireless Communication</b>              | 2.4 GHz Unlicensed ISM band<br>BLE physical layer with SOLUM Proprietary Protocol                                                                                                                                                                                                                                                 |
| <b>Communication Distance</b>              | 98 feet (30m) radius Line of Sight                                                                                                                                                                                                                                                                                                |
| <b>Security</b>                            | 128-bit AES Encryption                                                                                                                                                                                                                                                                                                            |
| <b>Compliance</b>                          | FCC, CE, RoHS                                                                                                                                                                                                                                                                                                                     |
| <b>Operating Temperature</b>               | 32°F ~ 122°F (0°C ~ 50°C) @45~70% RH                                                                                                                                                                                                                                                                                              |
| <b>Storage Temperature</b>                 | 32°F ~ 122°F (0°C ~ 50°C) @45~70% RH                                                                                                                                                                                                                                                                                              |


### 3.2 Radio (RF) Specification

| Item | Parameter                            | Specification |     |     | Unit | Condition                     |
|------|--------------------------------------|---------------|-----|-----|------|-------------------------------|
|      |                                      | Min           | Typ | Max |      |                               |
| Tx   | Tx Power                             |               | 4   |     | dBm  |                               |
|      | [Carrier Frequency Offset and Drift] | -75           | 0   | 75  | kHz  |                               |
|      | Tx Current                           |               | -   | 10  | mA   | total current at max Tx Power |
| Rx   | Receiver Sensitivity                 | -85           | -   | -   | dBm  | PER < 5%                      |

### 3.3 NFC Specification

| Item | Parameter     | Specification |     |     | Unit | Condition |
|------|---------------|---------------|-----|-----|------|-----------|
|      |               | Min           | Typ | Max |      |           |
| NFC  | Read Distance | -             | 0.7 | -   | in   |           |
|      |               | -             | 20  | -   | mm   |           |

NFC antenna location shown for each ESL size.

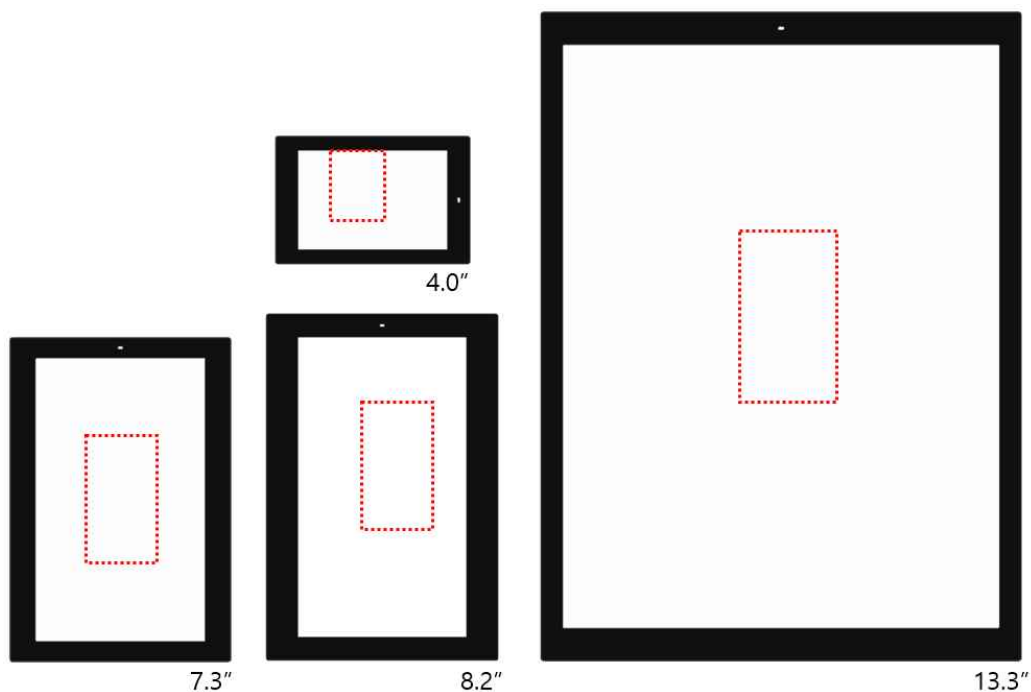

**Figure 2. NFC LOCATION**

### 3.4 Features


Some of the features of SOLUM ESL.

- Low power consumption (up to 10year battery life)
- 'Real time' update speed
- SOLUM Proprietary Protocol communication with SOLUM Gateway for added security

| Item                | Description                                               |
|---------------------|-----------------------------------------------------------|
| LED                 | 7 colors (Red, Green, Blue, Yellow, Cyan, Magenta, White) |
| Usable Pages        | 7 pages / 3 pages                                         |
| NFC                 | Built-in Felica NFC Forum Type 3                          |
| IP Rating           | IP68                                                      |
| Housing Bezel Color | White, Black                                              |

## 3.5 Mechanical Drawing

**4.0''**  
Model

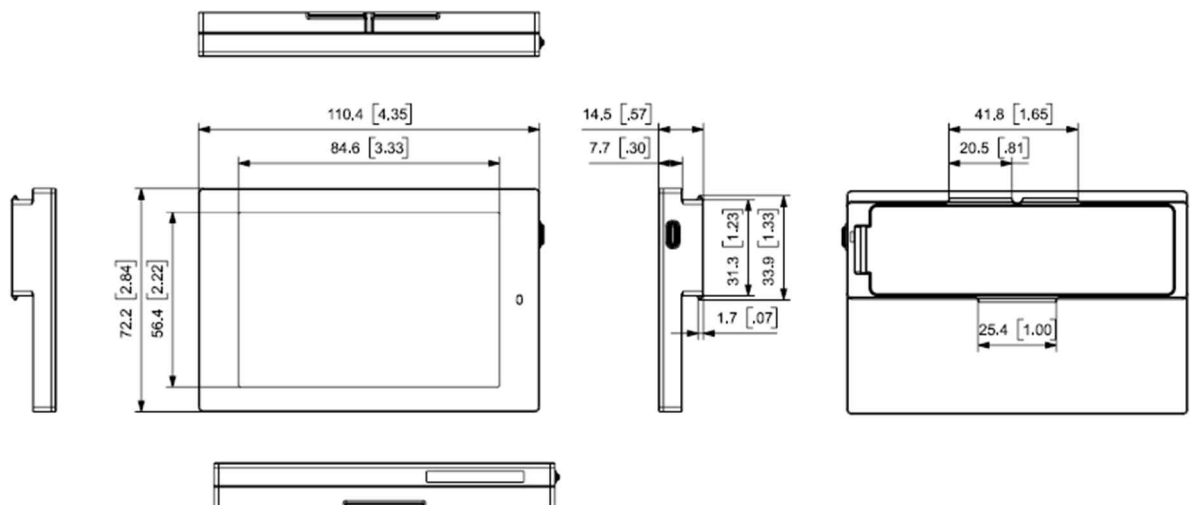

(Unit: mm)

**Figure 3. 4.0'' Mechanical Dimension**


**7.3"**  
Model



(Unit: mm)

**Figure 4. 7.3" Mechanical Dimension**


**8.2"**  
Model

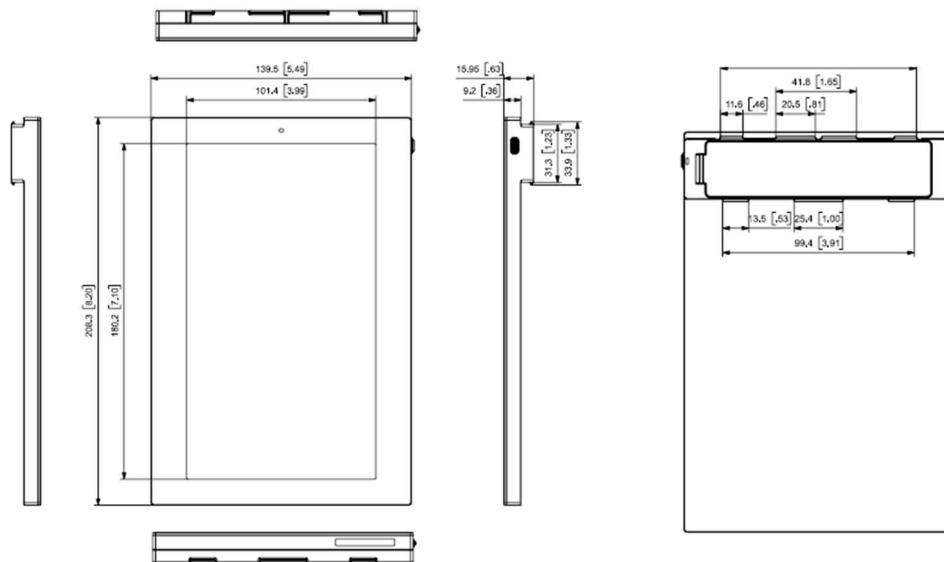

(Unit: mm)


**Figure 5. 8.2" Mechanical Dimension**

**13.3"**  
Model

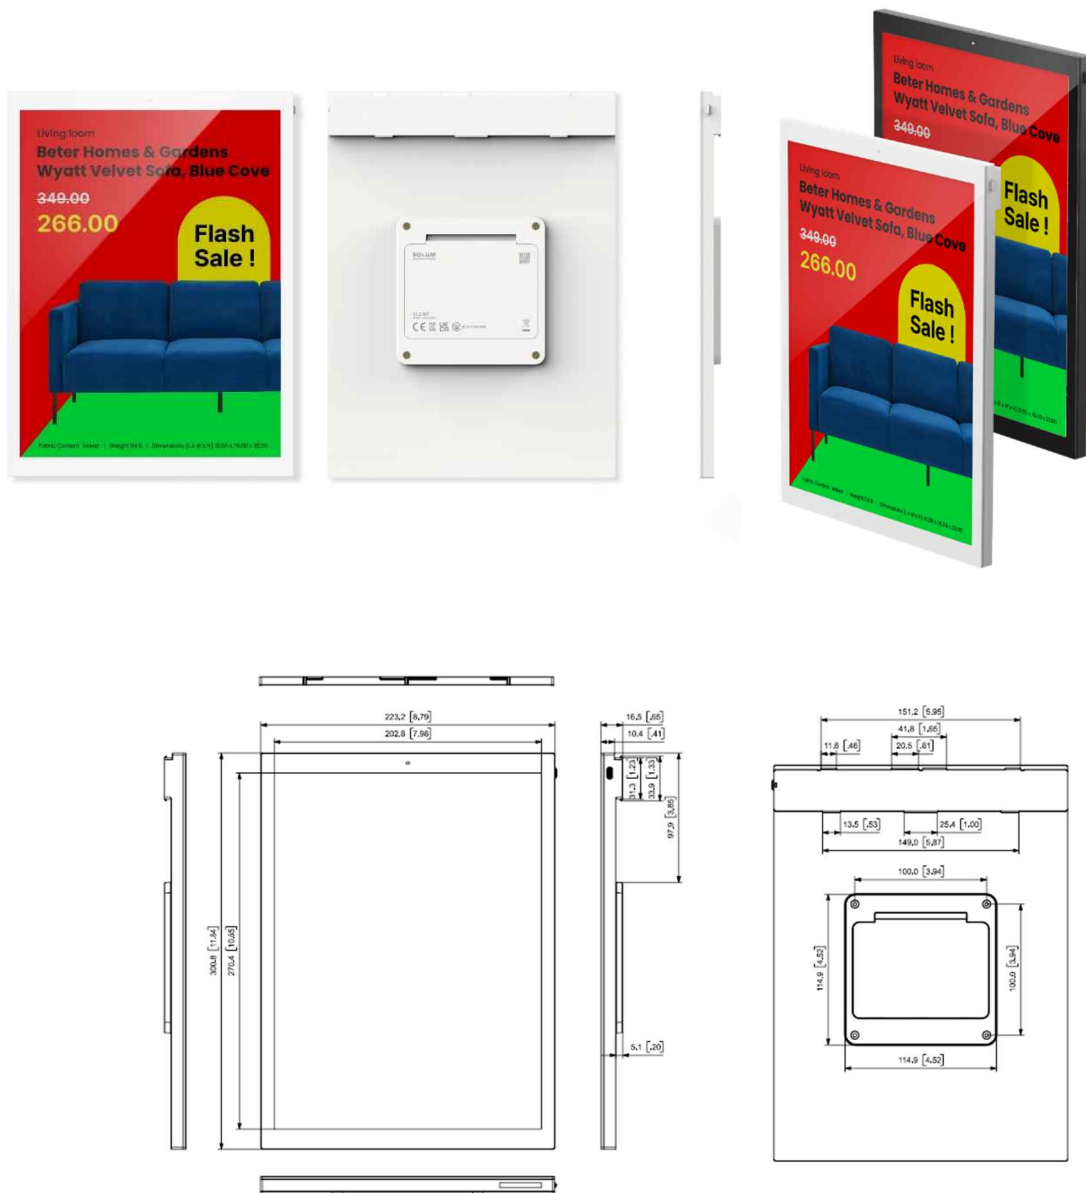

**Figure 6. 13.3" Mechanical Dimension**

### 3.6 Label Marking

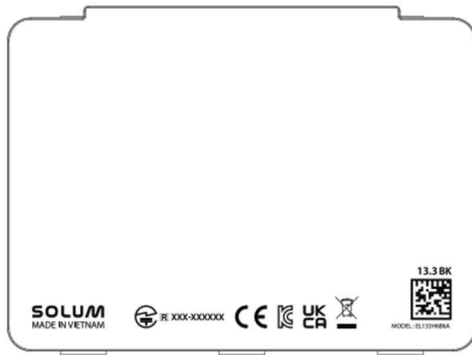

**Figure 7. ESL Labels**

ESL specific information can be found on the laser marking located on the back of the ESL.  
Information displayed are : Model, Certifications

1) Model: EL-①②③**F6**④⑤⑥ (i.e. EL016F6W4A)

- ① ② ③: ESL Display Size

029=2.9", 043=4.3", 082=8.2", 116=11.6"

- ④: Housing Color

W =white, B =black

- ⑤: ESL Display Color

4= RED, YELLOW (BWRY) , **6=SPECTRA 6**

- ⑥: ESL Tag Type

A=(Button, NFC,LED)

| Size  | Model Name |            |
|-------|------------|------------|
|       | WHITE      | BLACK      |
| 4.0"  | EL040H6W6A | EL040H6B6A |
| 7.3"  | EL073H6W6A | EL073H6B6A |
| 8.2"  | EL082H6W6A | EL082H6B6A |
| 13.3" | EL133H6B6A | EL133H6B6A |

#### ● E-label

**[Accessed by the user]**

-Step1 : Press the side Button for 3seconds and then ESL screen will be off.

-Step2 : Press the side Button for 3seconds again and then

E-LABEL will be shown during 1 minute on the display

 **NEWTON PRO 13.3" FULL COLOR Normal**

Rating : 3V 1.0A

R-R-SLU-EL133H6B6A

IC : 22800-EL133H6B6A

FCC ID : 2AFWN-EL133H6B6A

### 3.7 Initial display image

ESL specific information can be found on the image of the ESL. Information displayed are but not limited to : IC, FCC ID, Model, ESL Media Access and Control (MAC) Address.

Information can be found in the image below. MAC barcode and 12-digits code will be shown on the display and the label can be found in the side of the ESL as well. They are to be scanned for operation.



**Figure 8. ESL Labels (MAC)**

### 3.8 Certifications

Each ESL has the following certifications and should be noted for your region.

| Size  | Model      | FCC | IC | CE* | UKCA | TELEC | KC |
|-------|------------|-----|----|-----|------|-------|----|
| 4.0"  | EL040H6B6A | o   | o  | o   | o    | o     | o  |
| 7.3"  | EL073H6B6A | o   | o  | o   | o    | o     | o  |
| 8.2"  | EL082H6B6A | o   | o  | o   | o    | o     | o  |
| 13.3" | EL133H6B6A | o   | o  | o   | o    | o     | o  |

- IEC 62471 standard (Photobiological Safety of Lamps and Lamp Systems) compliant

\*CE: RF/EMC/LVD/RoHS2

#### 3.8.1

#### 3.8.2 FCC

**FCC ID : 2AFWN-EL133H6B6A**

**WARNING:** This equipment may generate or use radio frequency energy. Changes or modifications to this equipment may cause harmful interference unless the modifications are expressly approved in the instruction manual. The user could lose the authority to operate this equipment if an unauthorized change or modification is made.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**FCC Information to User**

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

**Caution**

THE GRANTEE IS NOT RESPONSIBLE FOR ANY CHANGES OR MODIFICATIONS NOT EXPRESSLY APPROVED BY THE PARTY RESPONSIBLE FOR COMPLIANCE. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT. IMPORTANT NOTE : FCC RF Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

**3.8.3 CE**

We hereby declare under our sole responsibility that the electrical product above is in compliance with the essential requirements of the Radio Equipment Directive (2014/53/EU) by application of EN IEC 62368-1:2020+A11:2020 EN 62479:2010

EN 300 328 V2.2.2

EN 300 330 V2.1.1

EN 62479: 2010

EN 301 489-1 V2.2.3

EN 301 489-3 V2.1.1

EN 301 489-17 V 3.2.0

and the Directive (2011/65/EU) on the restriction of the use of certain hazardous substances in electrical and electronic equipment by application of EN 62321 Series.

• SOLUM CO., LTD



• 357, Yongin Techno Valley Building A, Guseong-ro, Giheung-gu, Yongin-si, Gyeonggi-do, 16914, Republic of Korea

### 3.8.4 IC

#### IC : 22800-EL133H6B6A

ISED Information to User

[French]

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Attention: Tout changement ou modification non expressément approuvé par le fabricant peut annuler le droit de l'utilisateur à utiliser l'équipement.

exposition aux rayonnements radiofréquences. Pour se conformer aux exigences de conformité de l'exposition IC RF, une distance de séparation d'au moins 20 cm doit être maintenue entre l'antenne de cet appareil et toutes les personnes.

[English]

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Caution: Any change or modification not expressly approved by the manufacturer may void the user's right to use the equipment.

exposure to radiofrequency radiation. To comply with the ICRF exposure compliance requirements, a separation distance of at least 20 cm must be maintained between the antenna of this device and all persons.

-PMN(Product Marking Name) ESL Label

-FVIN(Firmware Version Identity Number) V36

### 3.8.5 KC

인증받은 자의 상호명 : 주식회사 솔루엠

제품명 : 특정소출력 무선기기(무선데이터통신시스템용 무선기기)

모델명 : EL133H6B6A


제조사 : 주식회사 솔루엠

제조국 : 한국, 베트남


제조일자 : 2024. . .

## 4 Packaging

### 4.1 4.0"

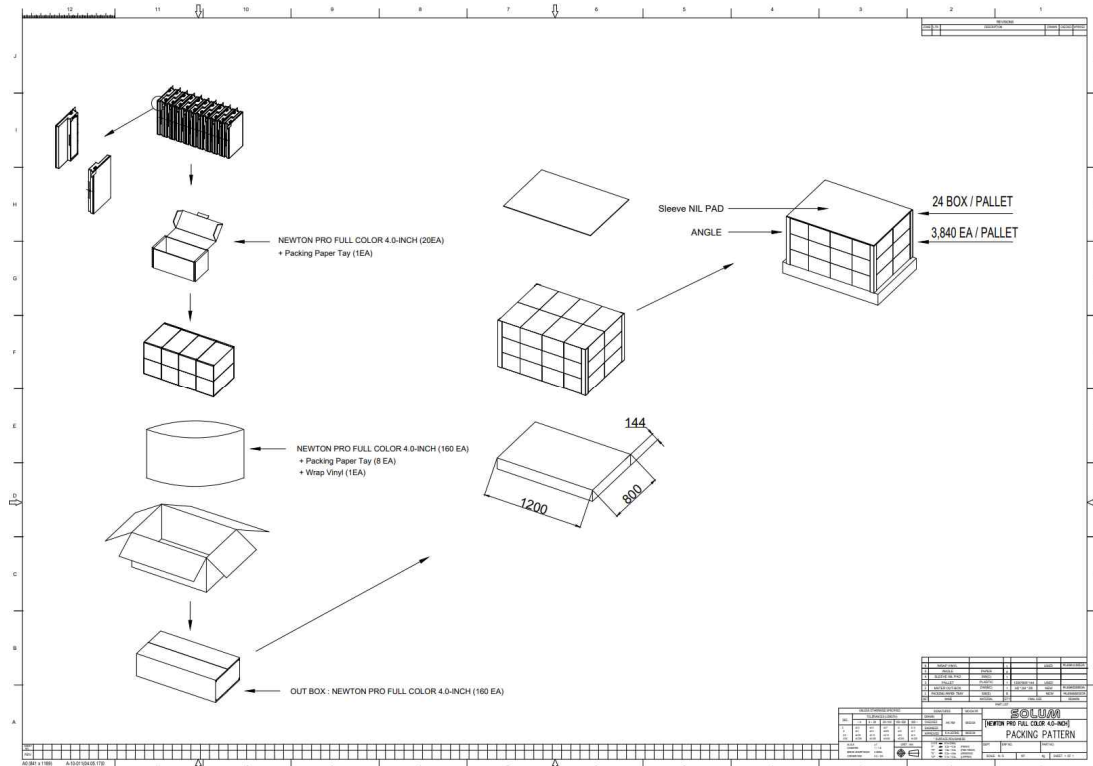

**Figure 9. 4.0" Packing-Diagram (1,200 X 800)**

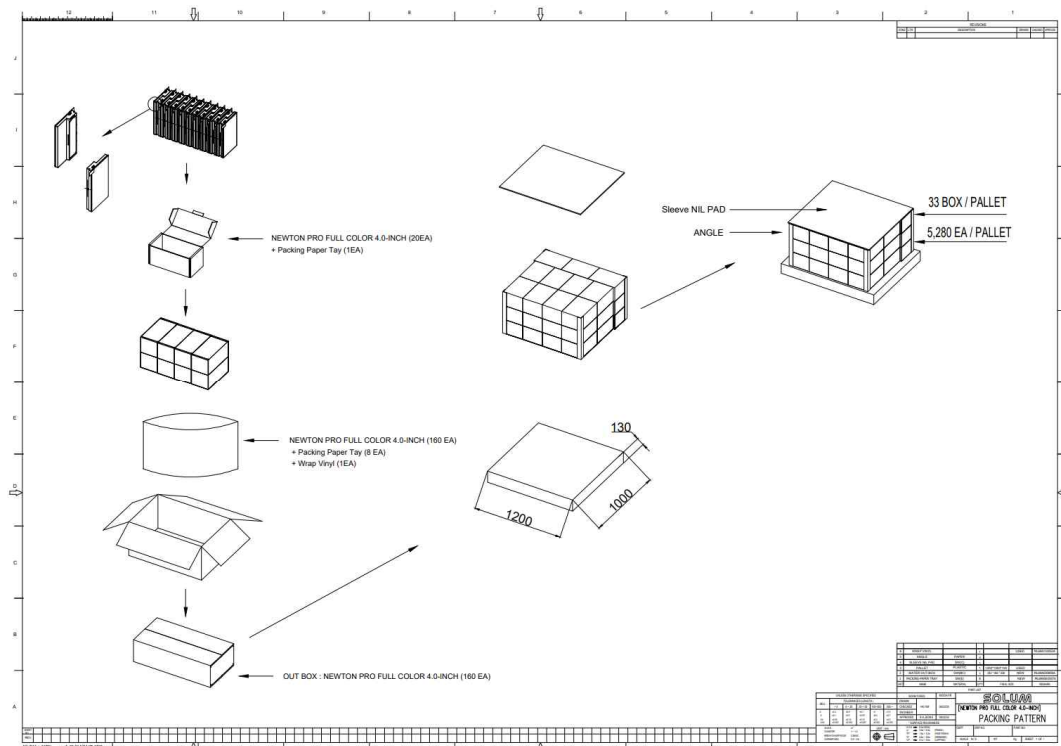

**Figure 10. 4.0" Packing-Diagram (1,200 X 1,000)**

Diagram illustrating the packing pattern for Newton Pro Full Color 7.3-inch (40 EA).

The diagram shows the assembly of the inner box, the addition of padding (Sleeve Nil Pad) and tape (ANGEL), and the final outer box construction.

Dimensions and quantities are provided:

- Inner box dimensions: 1200 (length) x 800 (width) x 144 (height).
- Outer box dimensions: 1200 (length) x 800 (width) x 144 (height).
- Quantity: 25 BOX / PALLET, 1,000 EA / PALLET.

Labels and descriptions include:

- NEWTON PRO FULL COLOR 7.3-INCH (20EA) + Packing Paper Tay (1EA)
- NEWTON PRO FULL COLOR 7.3-INCH (40 EA) + Packing Paper Tay (2 EA) + Wrap Vinyl (1EA)
- OUT BOX : NEWTON PRO FULL COLOR 7.3-INCH (40 EA)

Additional labels include: Sleeve Nil Pad, ANGEL, 25 BOX / PALLET, 1,000 EA / PALLET.

Diagram illustrating the packing pattern for the Newton Pro Full Color 7.3-inch monitor.

The diagram shows the assembly of the monitor into its protective packaging. The components and steps are as follows:

- Newton Pro Full Color 7.3-inch (20EA)** + Packing Paper Tray (1EA)
- Newton Pro Full Color 7.3-inch (40 EA)** + Packing Paper Tray (2 EA) + Wrap Vinyl (1EA)
- OUT BOX : NEWTON PRO FULL COLOR 7.3-INCH (40 EA)**
- 40 BOX / PALLET**
- 1,600 EA / PALLET**


Dimensions for the box and pallet are provided:

- Box dimensions: 1200 (width) x 1000 (depth) x 130 (height)
- Pallet dimensions: 1200 (width) x 1000 (depth)


Additional labels include: Sleeve NIL PAD, ANGLE, and SOLIDUM.

Proprietary and Confidential

### 4.3 8.2"

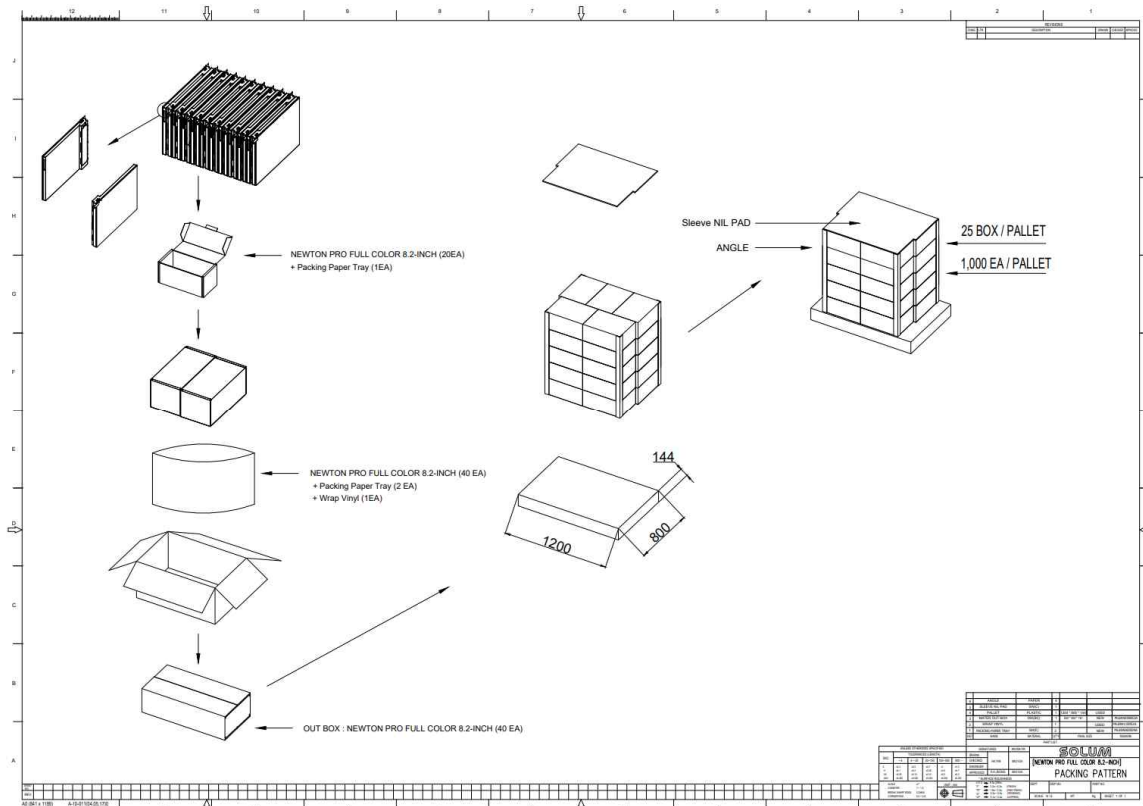


**Figure 13. 8.2" Packing-Diagram (1,200 X 800)**

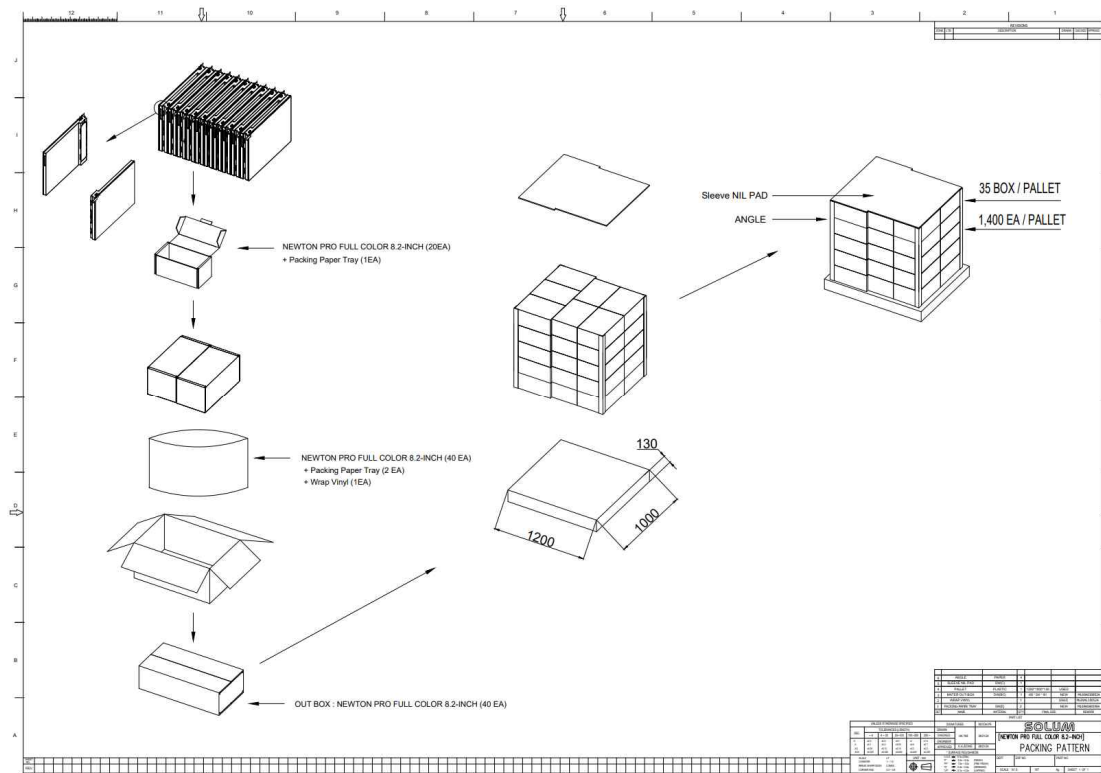


**Figure 14. 8.2" Packing-Diagram (1,200 X 1,000)**

## 4.4 13.3"

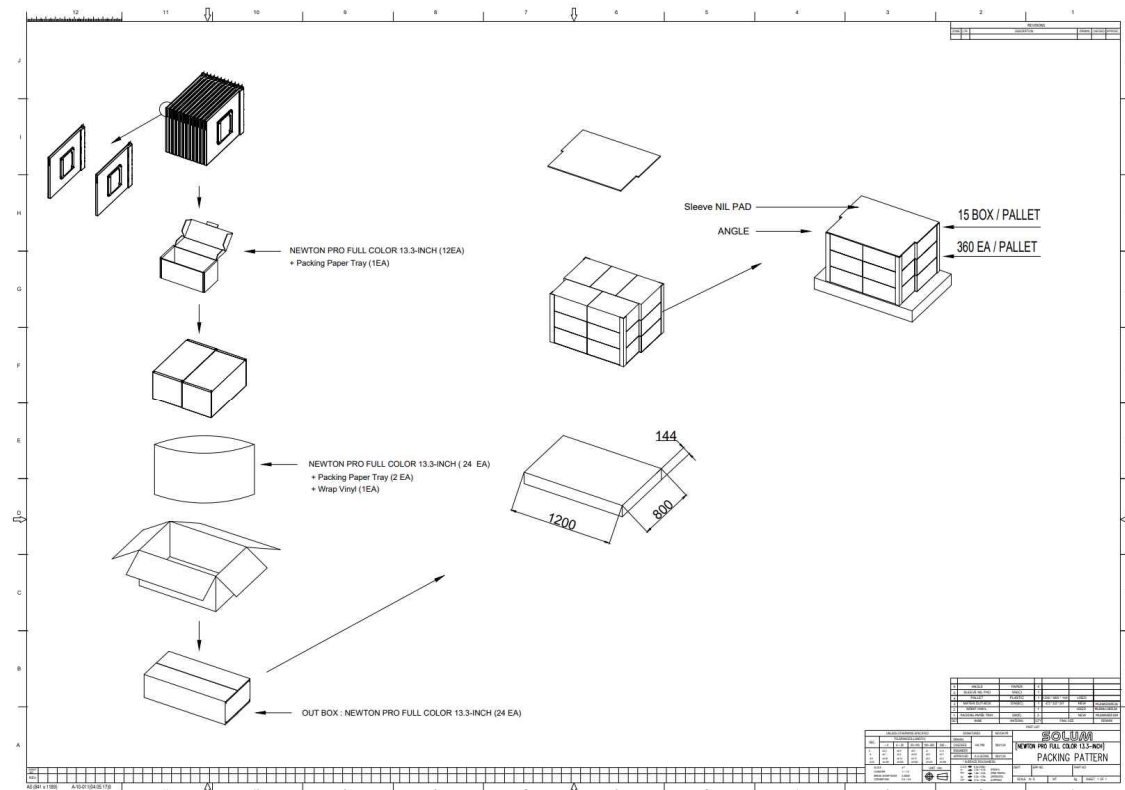

**Figure 15. 13.3" Packing-Diagram (1,200 X 800)**

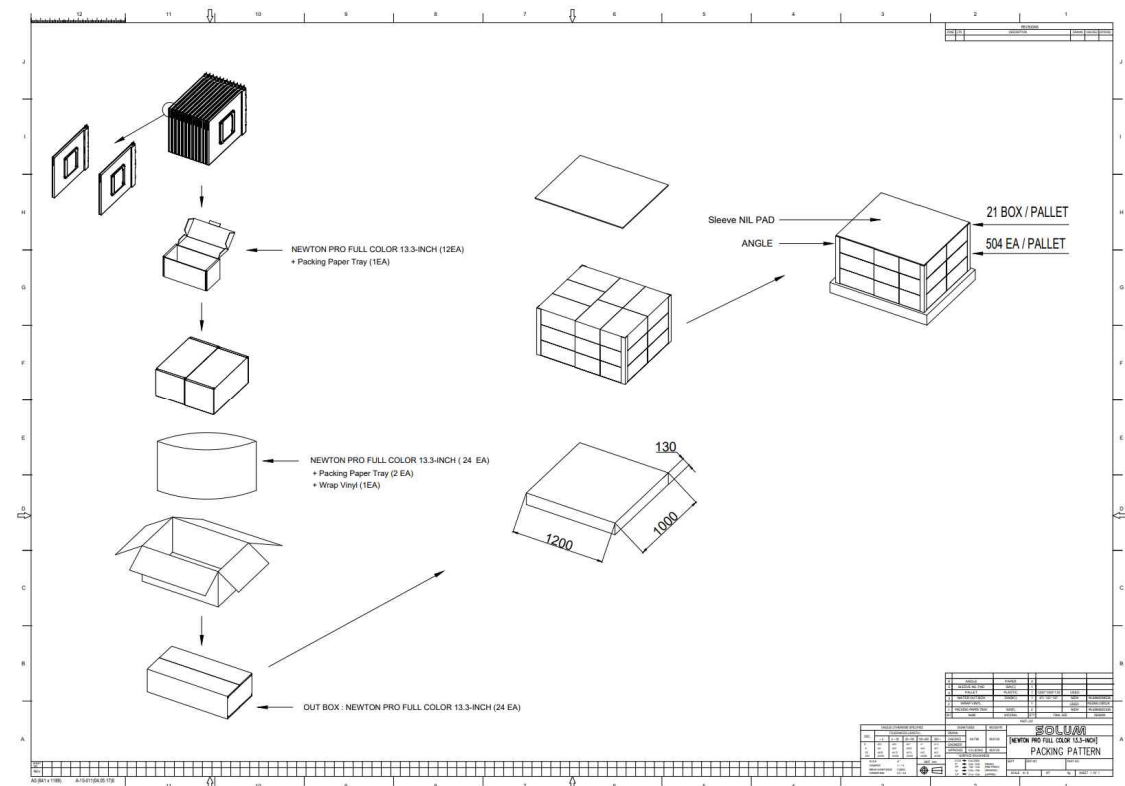

**Figure 16. 13.3" Packing-Diagram (1,200 X 1,000)**

## 5 Reliability Test

High Temperature Operation

Low Temperature Operation

High Temperature/Humidity Operation

High Temperature Storage

Temperature Shock (Storage)

ESD

Package Drop Test

Package Random Vibration Test

| Test Item                               | Test Condition                                                                                                  | Pass Criteria                        |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------|--------------------------------------|
| High Temp Resistance                    | 60°C / 35%, 240hrs                                                                                              | Normal operation after test          |
| High Temp Operation                     | 40°C / 35%, 240hrs                                                                                              |                                      |
| Thermal Shock                           | -25°C (for 30mins) ~ 60°C (for 30mins) for 240 cycles                                                           |                                      |
| High Temp & Humidity Operation          | 40°C / 70%, 240hrs                                                                                              |                                      |
| Low Temp Operation                      | Normal ESL: 0°C (240hrs)                                                                                        |                                      |
| ESD Test                                | Air ±10KV, 150pF, 330Ω, 10 times/Point                                                                          |                                      |
| WaterProof (IEC60529)                   | WaterProof Test: 15cm x 15cm water tank, 1m depth of water, 30 minutes (IP68 criteria) for Newton Pro tags only | No water ingress into tag            |
| RF Sensitivity (Communication Distance) | Gateway <-> Tag distance: 100 meters                                                                            | Tag receives RF signal from Gateway. |

## 6 Product Handling Precautions

Provisions should be made to Protect against any damage to the Product caused by improper handling. The purchaser assumes any responsibility for damage to the Product caused by improper handling.

Product should be stored in 32 °F ~ 104 °F (0°C ~ 40°C) @45~70% RH environment and should be installed within **90 days** of receipt.

### 6.1 Usage Environment

Take extra caution when using this RF device in the vicinity of other electronic devices and appliances. Most electronic devices and appliances use electromagnetic waves. Electromagnetic waves emitted by this RF device can affect other electronic devices and appliances.

If using the device in an explosion hazard area, follow all safety regulations, instructions, and signals.

### 6.2 Storage and Use

- The Product is shipped in sleep mode (white screen), so it should be activated by pressing the button.
- Moisture and liquids can damage internal parts and circuit boards if allowed to enter into the device itself.
- Do not place or store the Product on a sloped surface. The Product may slide and fall off the surface and become damaged.
- Use the Product in temperatures ranges of **0°C~40°C/32~104°F**. Parts and circuits may be damaged if operated or stored in extreme temperature.
- The display panel needs extra care during handling.
  - Do not apply any impacts on the e-Paper display as it is fragile.
  - Continuous exposure to excessive moisture (over 70% RH) or UV shortens display lifetime.
  - Ghosting image may appear in temperature conditions of less than **15°C/59°F**. (If  $\Delta L^* > 2$ , we call it ghosting phenomenon)
- Avoid areas with strong magnetism or subject to magnetism.  
Contact between the device and a magnetic object can lead to malfunctions.
- Do not place the product near heat-producing kitchen appliances like a stove or a microwave or in the vicinity of highly pressurized containers.
- External impact to the product, such as from being dropped, can damage the product.
- Twisting and bending the product can damage the exterior casing and the internal components.


- If this product operates abnormally while removing battery or replacing battery, it needs to be discharged by contacting the battery terminals (+) and (-) in the product.
- This product uses the 2.4GHz frequency band for the wireless communication network. Radio communications can be limited or affected by other applications that share the same frequency band, such as WiFi, Bluetooth, Zigbee, etc.
- A prior investigation into the radio environment is strongly required for efficient and smooth installation.
- Frequent communications, updates and screen renewals may reduce battery life time.
- Low temperature environments may reduce battery life.
- FIFO (First In First Out)

## 6.3 Product Cleaning

### For Spray Cleaning:

#### Steps

- ① Lightly spray all surfaces and wait a few seconds.
- ② Gently wipe clean using a cloth or tissue.
- ③ Let the labels dry.

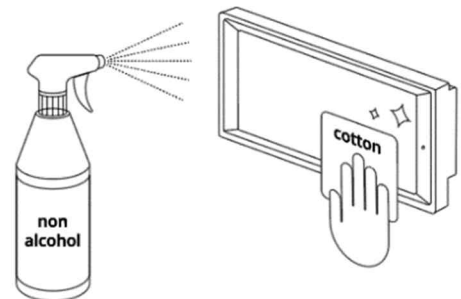

#### Notes:

- Use mild, non-alcoholic detergents or glass cleaner.
- Recommend non-abrasive cloths: Microfiber, Cotton T-shirt, Cotton handkerchief, Cotton tea towel

### For Wet Tissue Cleaning:

#### Steps

- ① Stand or lay down the labels.
- ② Wipe using wet tissues.
- ③ Let the labels dry.



## 6.4 Battery Replacement

### Audience

- Authorized personnel with the following knowledge are allowed to replace the battery:  
Battery / Electronic assemblies (e.g. circuit board) / Compliance with the instruction
- ※ Note: Warranty is voided if battery is replaced by unauthorized personnel.  
(When batteries require replacement, please contact the authorized personnel)

### Instructions

- Risk of short circuit if battery is incorrectly installed/stored.
- Check that hands are dry before and at all times during the replacement Process.
- Keep batteries away from children and infants.
- Do not heat, charge, bend, drop, short-circuit and/or disassemble battery.
- Do not mix together used and new batteries or different battery types.
- ※ Note: Battery rarely has minor stain or leak.

### Steps

- ① Open the battery cover.
- ② Take out the batteries.
- ③ Put in the new batteries.
- ④ Check the batteries direction.
- ⑤ Put back in the battery cover.

### Battery Direction

Red Wire: (+) Positive  
Black Wire: (-) Negative

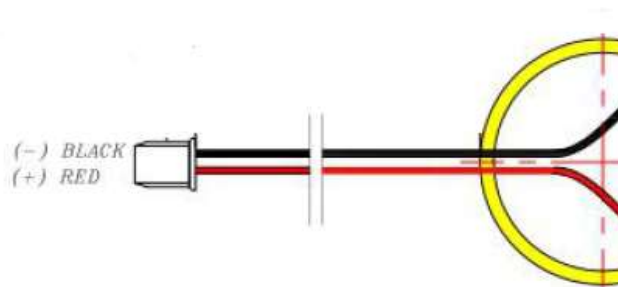


Figure 17. Battery Direction

## 7 Battery Handling Guide

### 7.1 Avoiding hazards in lithium battery handling

#### 1. Do not short circuit (Fig. 1)

. Direct connection of plus (+) and minus (-) poles may result in leakage, heat generation, explosion and/or fire.

. Do not store and/or carry batteries with metallic items, such as a necklace.

#### 2. Do not stack and/or jumble batteries (Fig. 2)


. Stacked and/or jumbled batteries may cause a short circuit and/or forced discharge from contact with other batteries.

. This may result in leakage, heat generation, explosion and/or fire.

#### 3. Do not make forced discharge batteries (Fig. 3)

. On a forced discharge by an external power source, the battery voltage goes to negative and this causes gas generation in inside of the battery.

. This may result in leakage, heat generation, explosion and/or fire.

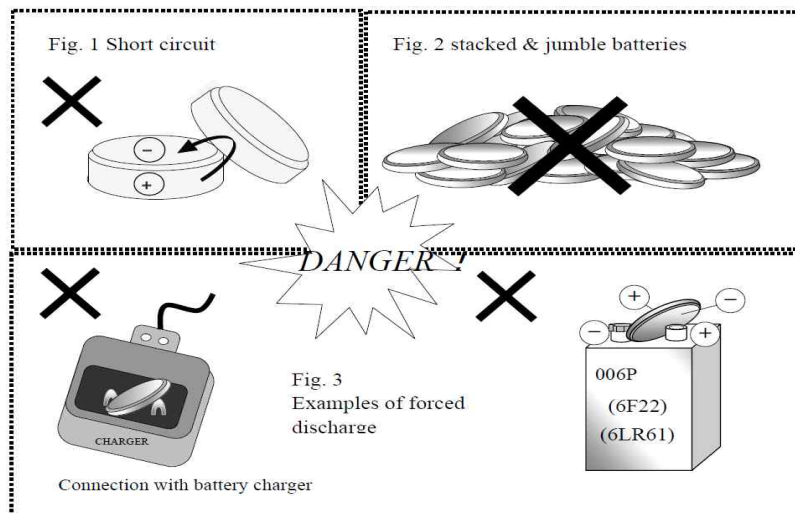

#### 4. Do not dispose of batteries in fire

. Disposal of batteries in fire is extremely dangerous with a risk of explosion and violent flaring.

#### 5. Do not heat batteries

. Heating batteries above 100°C/212°F may damage the resin in crimping, separator and other parts, potentially causing an electrolyte leak, internal short circuit, fire and/or explosion.

**6. Do not solder directly onto batteries**

. Direct soldering onto batteries may damage the resin in crimping, separator and other parts, potentially causing an electrolyte leak, internal short circuit, fire and/or explosion.

**7. Do not recharge batteries**

. Recharging of batteries may result in internal gas generation, causing electrolyte leak, battery swelling, fire and explosion.

**8. Do not disassemble batteries**

. Disassembly of batteries may generate gas that may irritate your throat.

. Lithium may also react with moisture to generate heat and fire.

**9. Do not deform batteries**

. Applying extreme pressure to batteries may cause deformation of the crimping and internal short circuit, causing electrolyte leak, battery swelling, fire and explosion.

**10. Do not mix different type batteries**

. For some applications, mixing different types of batteries or new and old batteries, can cause an overdischarge due to differences in voltage and discharge capacities.

. This may lead to the risk of swelling and/or explosion.






**11. Do not insert batteries with opposite polarity**

. For some applications, battery insertion with opposite polarity (reverse insertion of plus and minus) may result in leakage, heat generation, explosion and/or fire.

**※ Please ensure the above precautions are strictly observed by related divisions including Production, warehouse, Product technology, sales, quality, customer stores, S/I companies, part-time workers, and external service companies.**


## 7.2 Proper Storing and Disposing of Lithium Batteries

- To minimize risk of fire and explosion of batteries, be sure to follow the instructions below.

| NG | Do not stack batteries                                                            | Do not stack batteries in a vinyl bags                                            | Do not Short circuit                                                               | Do not make forced discharge batteries                                              |                                                                                     |
|----|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|    |  |  |  |  |  |
| OK | Using battery tray<br>→ Tape sealing                                              | Tape attachment to "+/- electrodes                                                |                                                                                    |                                                                                     |                                                                                     |
|    |  |  |  |  |  |

- Proper use of battery tray is outlined below.

With batteries Properly placed into each tray slot → stack the trays in the same orientation → use an empty tray on the top stack → tape the stack together to avoid falling apart.

| OK | Use the battery tray                                                                | Stack on the tray                                                                    | Seal the tray with tape                                                               |
|----|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|    |  |  |  |

- Follow local regulations for Proper battery disposal guideline.