


11ax_40M_TX_CH_102_Vertical

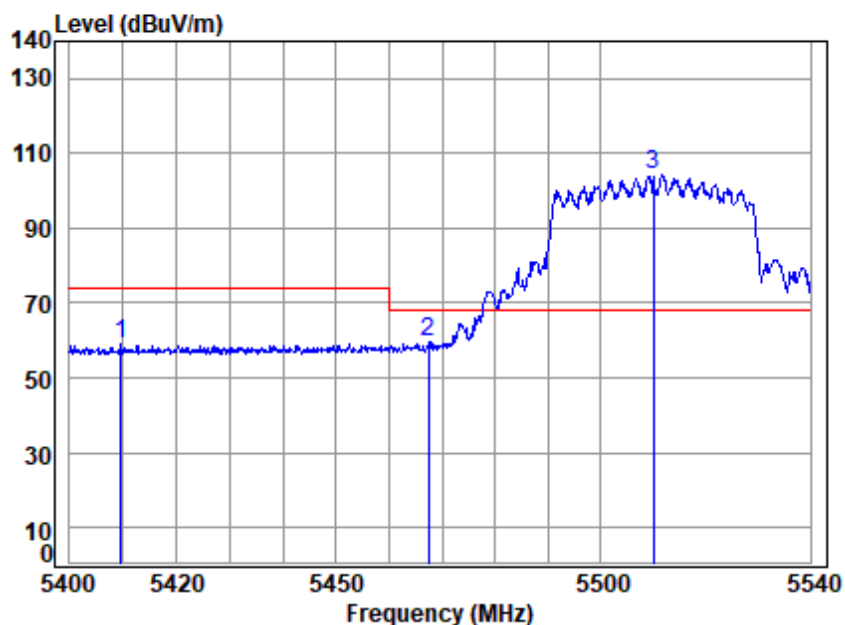


Condition: 3m VERTICAL

Job No : 04261WM

Mode : 5510 Band edge
: 5G Wi-Fi 11ax40

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5409.684	10.62	32.82	30.63	46.43	59.24	74.00	-14.76	peak
2	5467.453	10.59	32.90	30.65	46.76	59.60	68.20	-8.60	peak
3	5510.000	10.56	32.90	30.66	91.38	104.18	68.20	35.98	peak


11ax_40M_TX_CH_102_Vertical

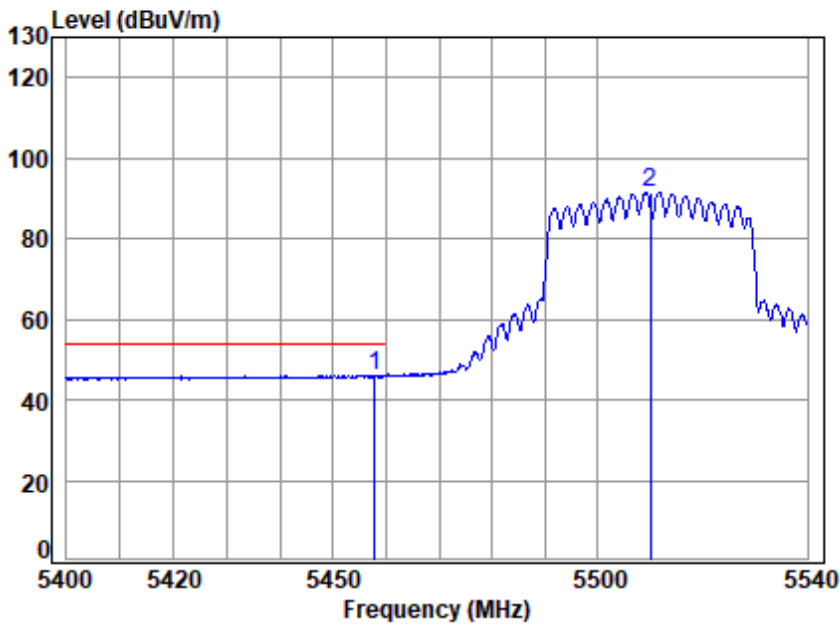

Condition: 3m VERTICAL
Job No : 04261WM
Mode : 5510 Band edge
: 5G Wi-Fi 11ax40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5457.805	10.60	32.90	30.64	33.28	46.14	54.00	-7.86	Average
2	5510.000	10.56	32.90	30.66	78.85	91.65	-----	-----	Average

11ax_40M_TX_CH_134_Horizontal

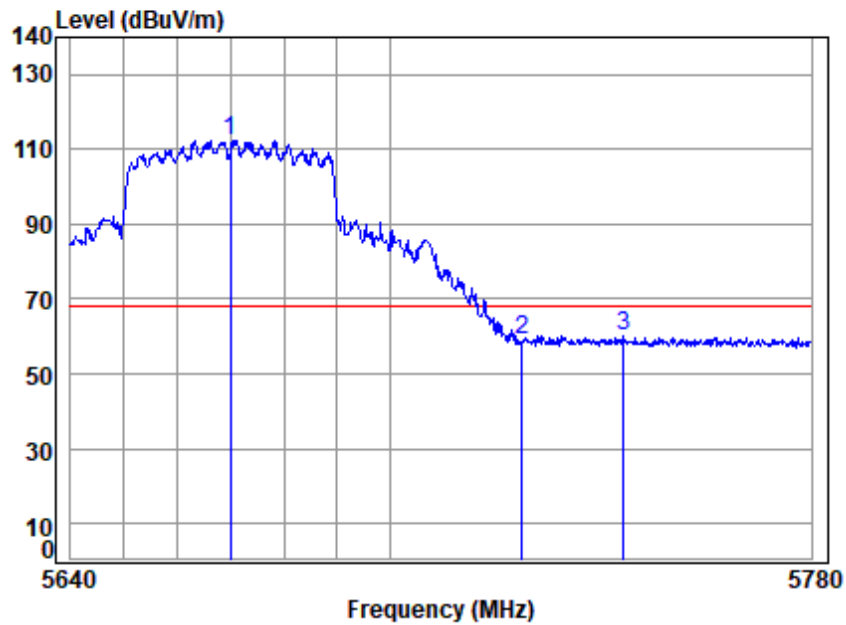


Condition: 3m HORIZONTAL

Job No : 04261WM

Mode : 5670 Band edge
: 5G Wi-Fi 11ax40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5670.000	10.52	33.14	30.71	99.60	112.55	68.20	44.35	peak
2	5725.000	10.68	33.25	30.72	45.72	58.93	68.20	-9.27	peak
3	5744.255	10.76	33.29	30.73	47.00	60.32	68.20	-7.88	peak

11ax_40M_TX_CH_134_Vertical

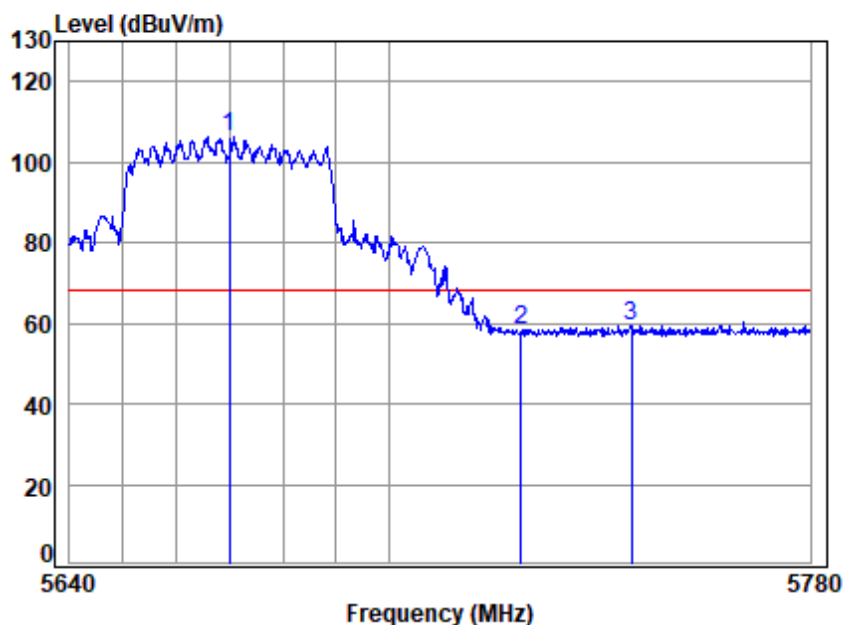


Condition: 3m VERTICAL

Job No : 04261WM

Mode : 5670 Band edge
: 5G Wi-Fi 11ax40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5670.000	10.52	33.14	30.71	93.47	106.42	68.20	38.22	peak
2	5725.000	10.68	33.25	30.72	45.07	58.28	68.20	-9.92	peak
3	5745.805	10.77	33.29	30.73	45.96	59.29	68.20	-8.91	peak

11ax_80M_TX_CH_106_Horizontal

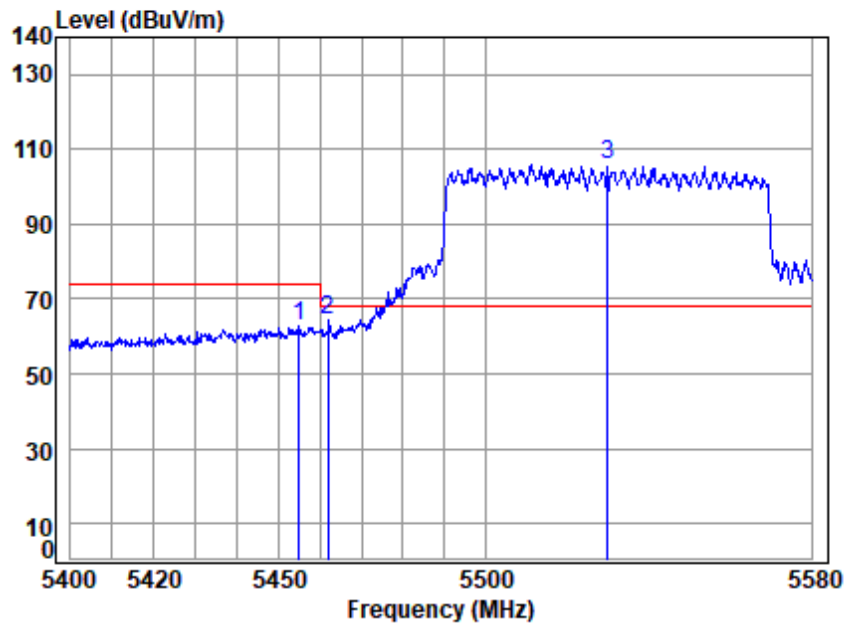

Condition: 3m HORIZONTAL


Job No : 04261WM

Mode : 5530 Band edge

: 5G Wi-Fi 11ax80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5454.813	10.60	32.90	30.64	49.74	62.60	74.00	-11.40	peak
2	5461.972	10.60	32.90	30.65	51.43	64.28	68.20	-3.92	peak
3	5530.000	10.53	32.90	30.67	92.95	105.71	68.20	37.51	peak

11ax_80M_TX_CH_106_Horizontal

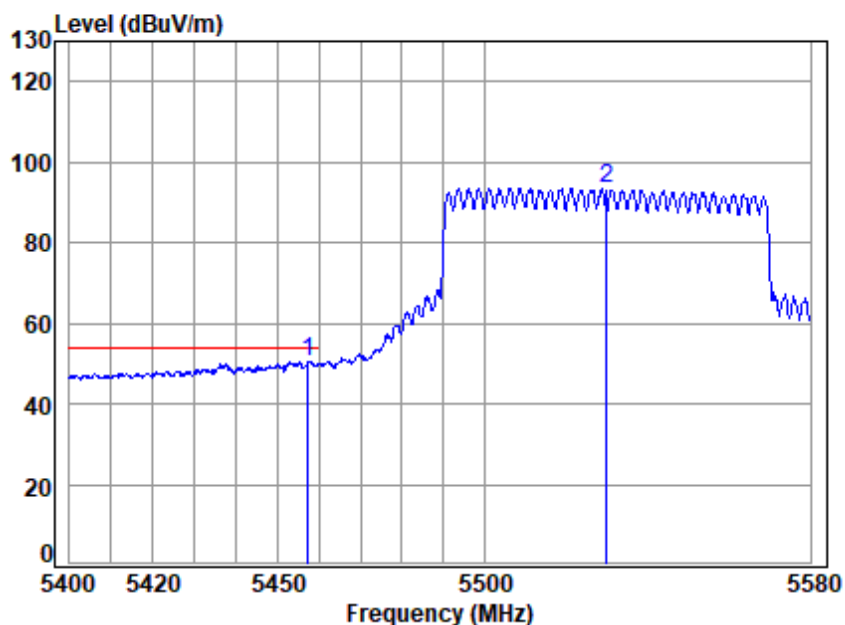


Condition: 3m HORIZONTAL

Job No : 04261WM

Mode : 5530 Band edge
: 5G Wi-Fi 11ax80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5457.317	10.60	32.90	30.64	37.54	50.40	54.00	-3.60	Average
2	5530.000	10.53	32.90	30.67	80.77	93.53	-----	-----	Average

11ax_80M_TX_CH_106_Vertical

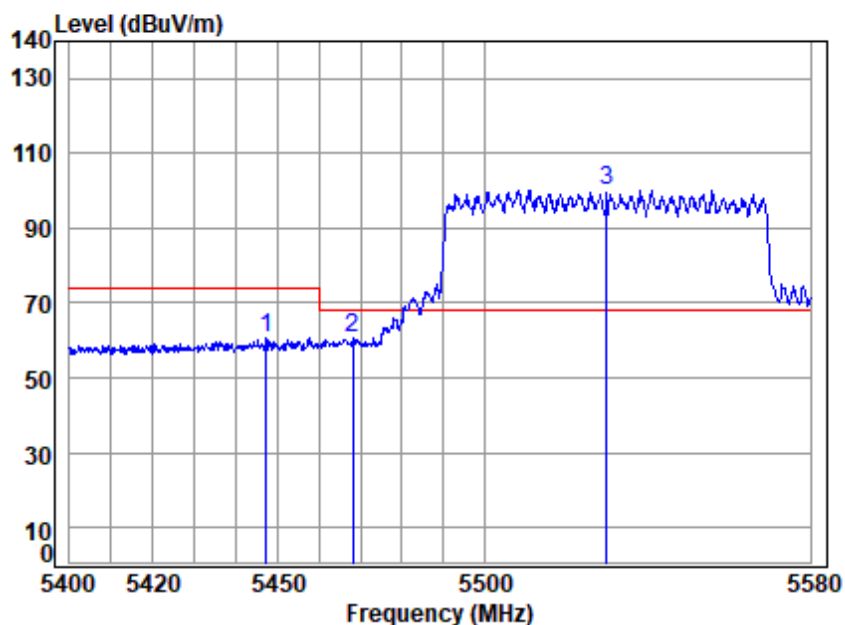

Condition: 3m VERTICAL


Job No : 04261WM

Mode : 5530 Band edge

: 5G Wi-Fi 11ax80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5447.305	10.60	32.89	30.64	47.76	60.61	74.00	-13.39	peak
2	5468.064	10.59	32.90	30.65	47.73	60.57	68.20	-7.63	peak
3 pp	5530.000	10.53	32.90	30.67	87.34	100.10	68.20	31.90	peak

11ax_80M_TX_CH_106_Vertical

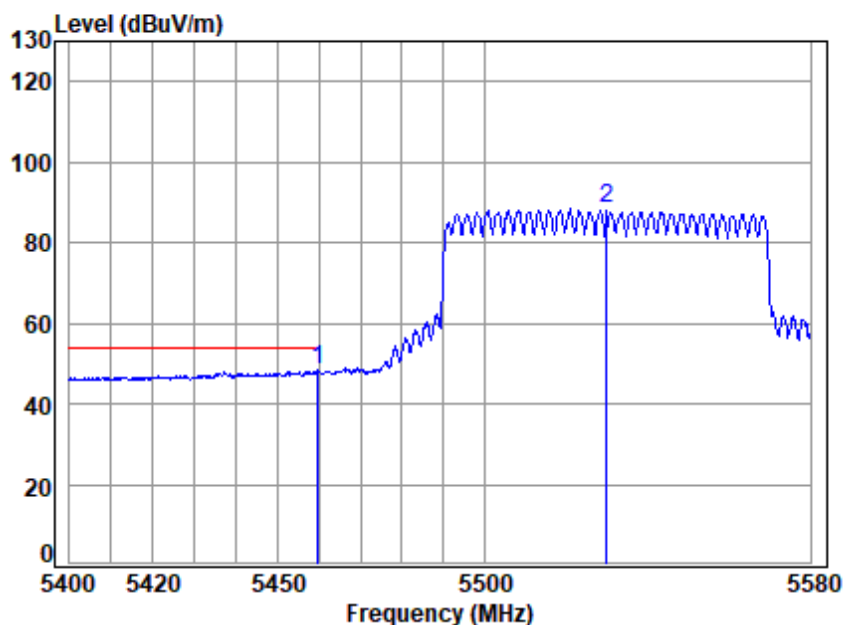


Condition: 3m VERTICAL

Job No : 04261WM

Mode : 5530 Band edge
: 5G Wi-Fi 11ax80

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	pp 5459.644	10.60	32.90	30.64	35.44	48.30	54.00	-5.70 Average
2	5530.000	10.53	32.90	30.67	75.66	88.42	-----	----- Average

11ax_80M_TX_CH_122_Horizontal

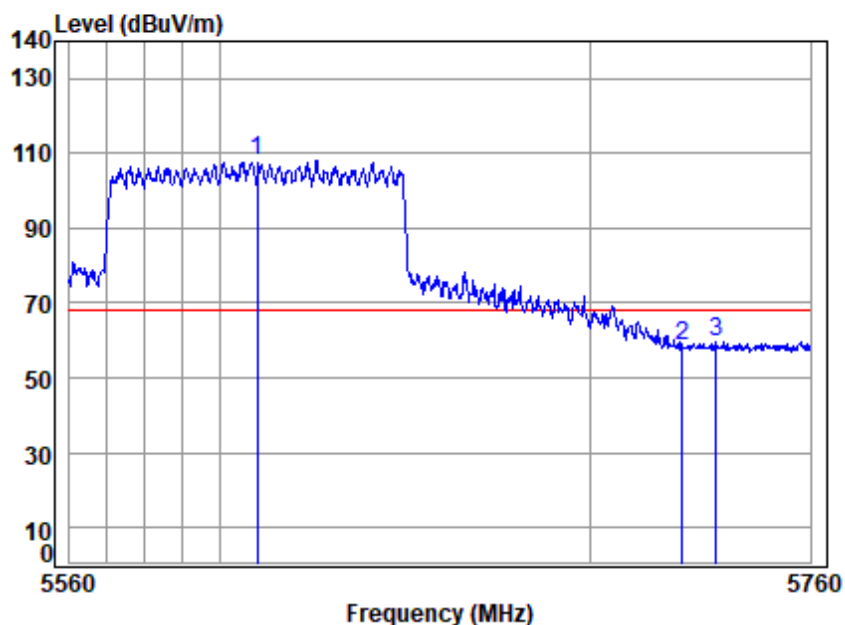


Condition: 3m HORIZONTAL

Job No : 04261WM

Mode : 5610 Band edge
: 5G Wi-Fi 11ax80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5610.000	10.43	33.02	30.69	95.35	108.11	68.20	39.91	peak
2	5725.000	10.68	33.25	30.72	45.52	58.73	68.20	-9.47	peak
3	5734.207	10.72	33.27	30.73	46.32	59.58	68.20	-8.62	peak

11ax_80M_TX_CH_122_Vertical

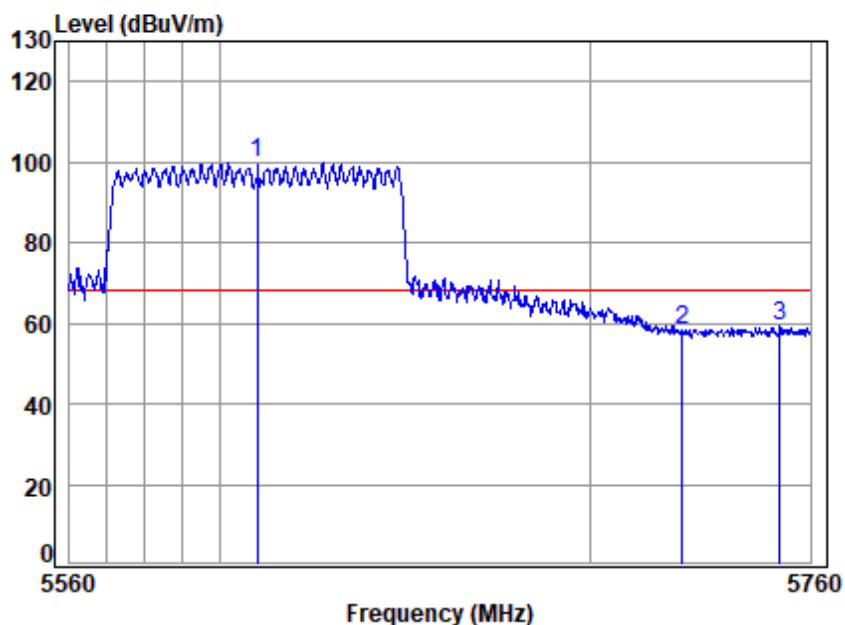

Condition: 3m VERTICAL


Job No : 04261WM

Mode : 5610 Band edge

: 5G Wi-Fi 11ax80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5610.000	10.43	33.02	30.69	87.29	100.05	68.20	31.85	peak
2	5725.000	10.68	33.25	30.72	45.12	58.33	68.20	-9.87	peak
3	5751.660	10.80	33.30	30.73	45.89	59.26	68.20	-8.94	peak

11ax_160M_TX_CH_114_Horizontal

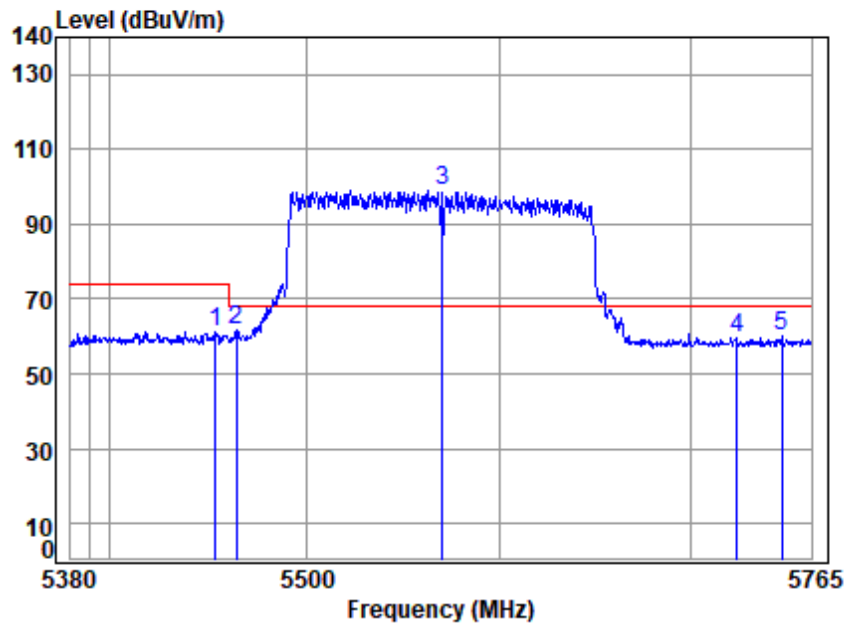

Condition: 3m HORIZONTAL


Job No : 04261WM

Mode : 5570 Band edge

: 5G Wi-Fi 11ax160

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5453.378	10.60	32.90	30.64	48.59	61.45	74.00	-12.55	peak
2	5463.942	10.59	32.90	30.65	49.05	61.89	68.20	-6.31	peak
3 pp	5570.000	10.46	32.94	30.68	86.48	99.20	68.20	31.00	peak
4	5725.000	10.68	33.25	30.72	46.22	59.43	68.20	-8.77	peak
5	5749.083	10.79	33.30	30.73	46.63	59.99	68.20	-8.21	peak

11ax_160M_TX_CH_114_Horizontal

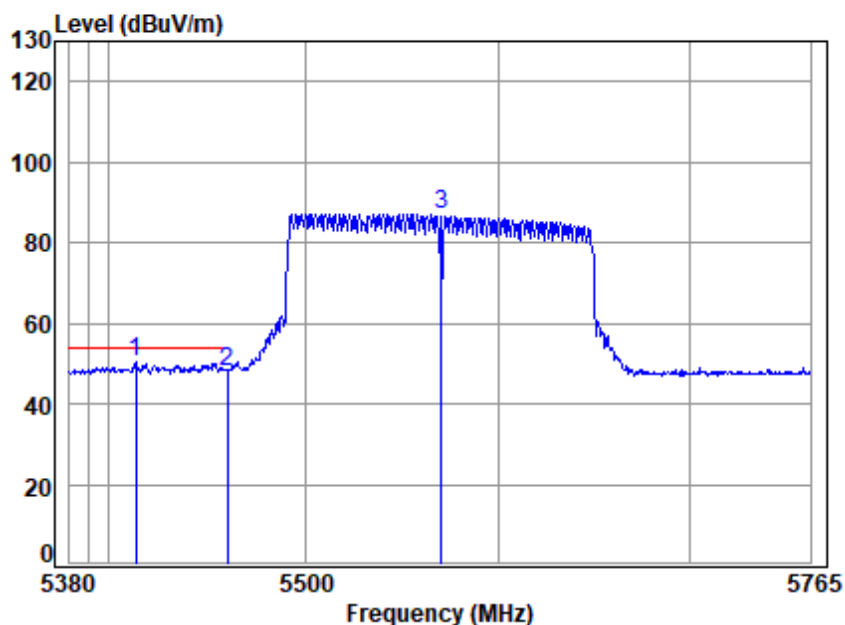

Condition: 3m HORIZONTAL


Job No : 04261WM

Mode : 5570 Band edge

: 5G Wi-Fi 11ax160

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5413.196	10.61	32.83	30.63	37.42	50.23	54.00	-3.77	Average
2	5460.000	10.60	32.90	30.64	35.26	48.12	54.00	-5.88	Average
3	5570.000	10.46	32.94	30.68	74.50	87.22	-----	-----	Average

11ax_160M_TX_CH_114_Vertical

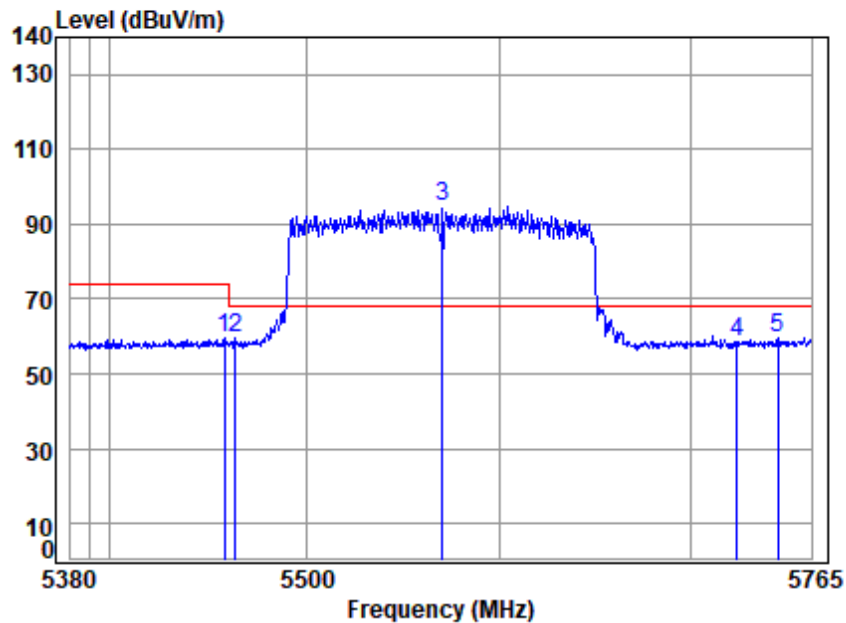

Condition: 3m VERTICAL


Job No : 04261WM

Mode : 5570 Band edge

: 5G Wi-Fi 11ax160

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5457.903	10.60	32.90	30.64	46.80	59.66	74.00	-14.34	peak
2	5463.564	10.59	32.90	30.65	47.00	59.84	68.20	-8.36	peak
3 pp	5570.000	10.46	32.94	30.68	81.98	94.70	68.20	26.50	peak
4	5725.000	10.68	33.25	30.72	45.24	58.45	68.20	-9.75	peak
5	5747.097	10.78	33.29	30.73	46.32	59.66	68.20	-8.54	peak


11ax_160M_TX_CH_114_Vertical

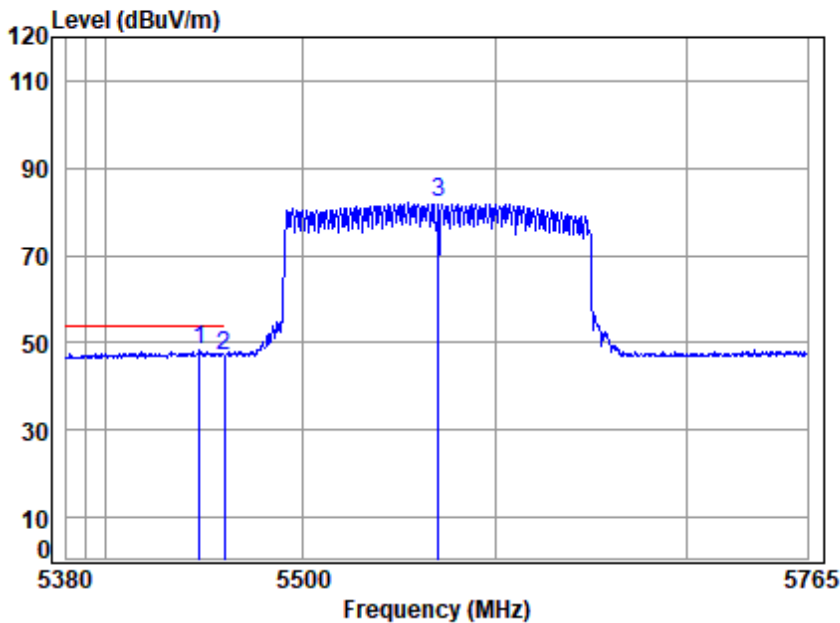

Condition: 3m VERTICAL
Job No : 04261WM
Mode : 5570 Band edge
: 5G Wi-Fi 11ax160

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5447.351	10.60	32.89	30.64	35.49	48.34	54.00	-5.66	Average
2	5460.000	10.60	32.90	30.64	34.18	47.04	54.00	-6.96	Average
3	5570.000	10.46	32.94	30.68	69.39	82.11	-----	-----	Average

11ax_20M_Partial_RU26_TX_CH_100_Horizontal

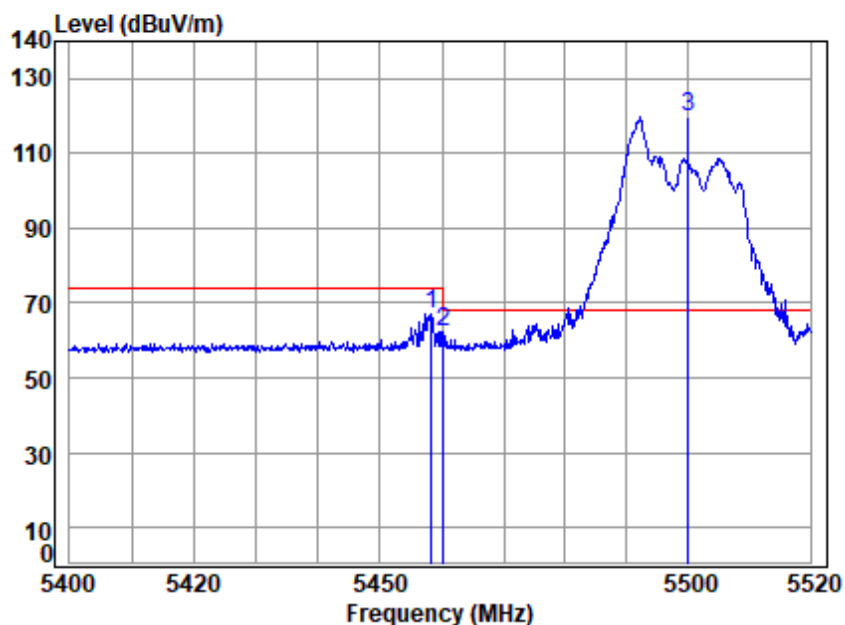

Condition: 3m HORIZONTAL


Job No : 04261WM

Mode : 5500 Band edge

: 5G Wi-Fi 11ax20 RU26

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5458.351	10.60	32.90	30.64	54.46	67.32	74.00	-6.68	peak
2	5460.271	10.60	32.90	30.64	49.18	62.04	68.20	-6.16	peak
3	5500.000	10.58	32.90	30.66	107.00	119.82	68.20	51.62	peak

11ax_20M_Partial_RU26_TX_CH_100_Horizontal

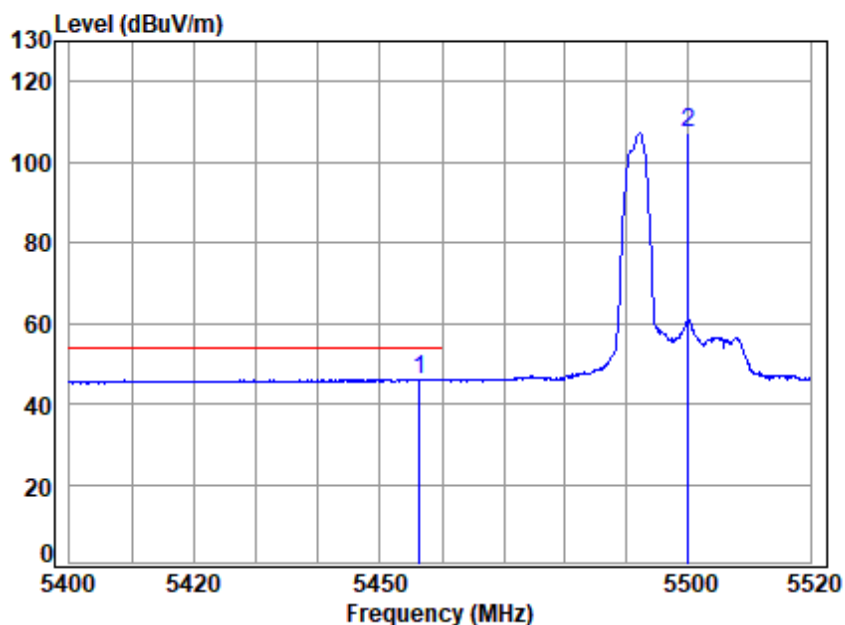

Condition: 3m HORIZONTAL


Job No : 04261WM

Mode : 5500 Band edge

: 5G Wi-Fi 11ax20 RU26

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5456.312	10.60	32.90	30.64	33.26	46.12	54.00	-7.88	Average
2	5500.000	10.58	32.90	30.66	94.41	107.23	-----	-----	Average

11ax_20M_Partial_RU26_TX_CH_100_Vertical

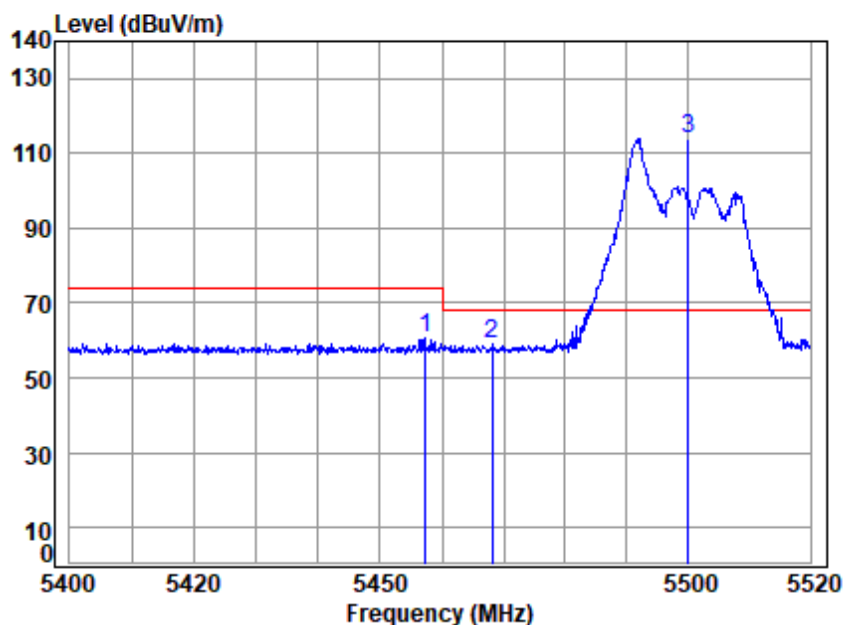

Condition: 3m VERTICAL


Job No : 04261WM

Mode : 5500 Band edge

: 5G Wi-Fi 11ax20 RU26

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5457.271	10.60	32.90	30.64	47.95	60.81	74.00	-13.19	peak
2	5468.197	10.59	32.90	30.65	46.32	59.16	68.20	-9.04	peak
3	5500.000	10.58	32.90	30.66	101.24	114.06	68.20	45.86	peak


11ax_20M_Partial_RU26_TX_CH_100_Vertical

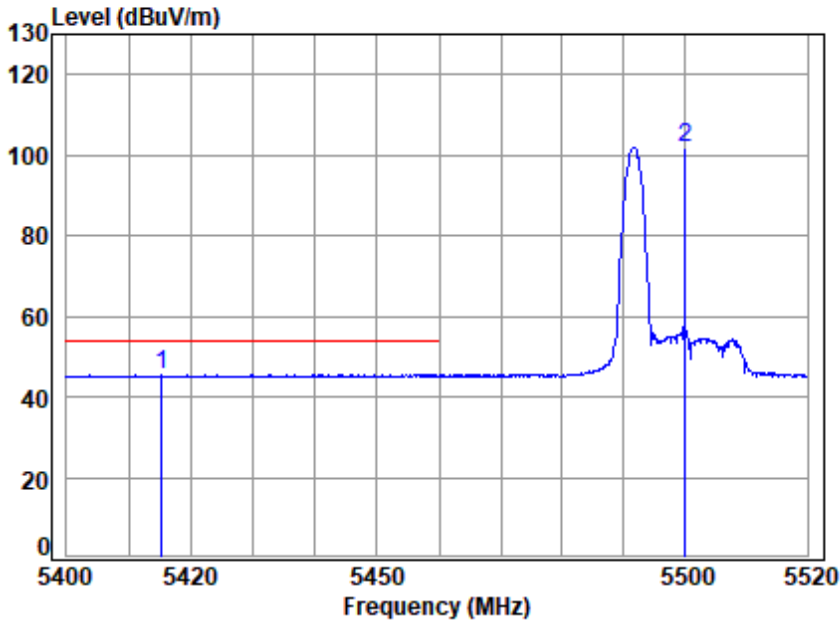

Condition: 3m VERTICAL
Job No : 04261WM
Mode : 5500 Band edge
: 5G Wi-Fi 11ax20 RU26

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5415.213	10.61	32.83	30.63	32.62	45.43	54.00	-8.57	Average
2 5500.000	10.58	32.90	30.66	89.17	101.99	-----	-----	Average

11ax_20M_Partial_RU26_TX_CH_140_Horizontal

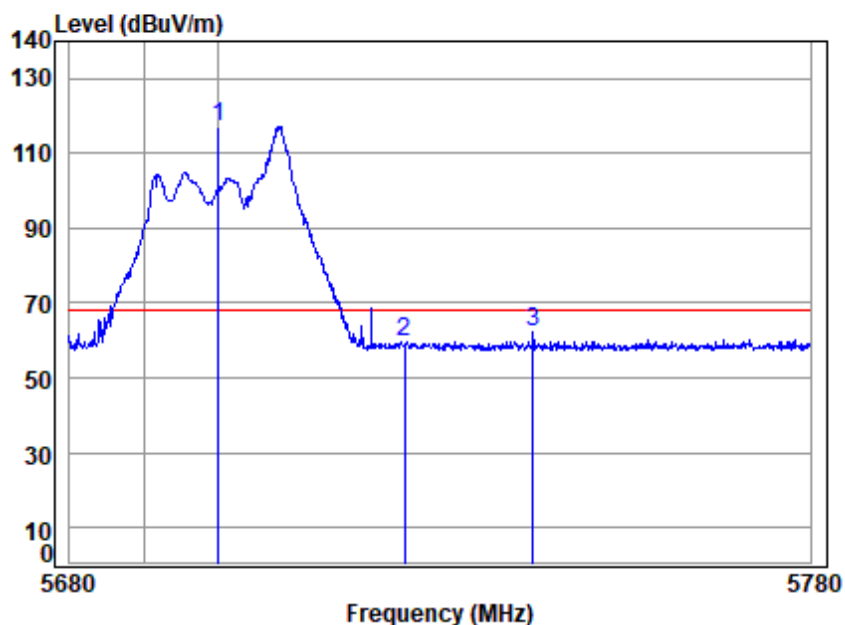

Condition: 3m HORIZONTAL


Job No : 04261WM

Mode : 5700 Band edge

: 5G Wi-Fi 11ax20 RU26

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5700.000	10.56	33.20	30.72	103.99	117.03	68.20	48.83	peak
2	5725.000	10.68	33.25	30.72	46.39	59.60	68.20	-8.60	peak
3	5742.396	10.76	33.28	30.73	48.87	62.18	68.20	-6.02	peak

11ax_20M_Partial_RU26_TX_CH_140_Vertical

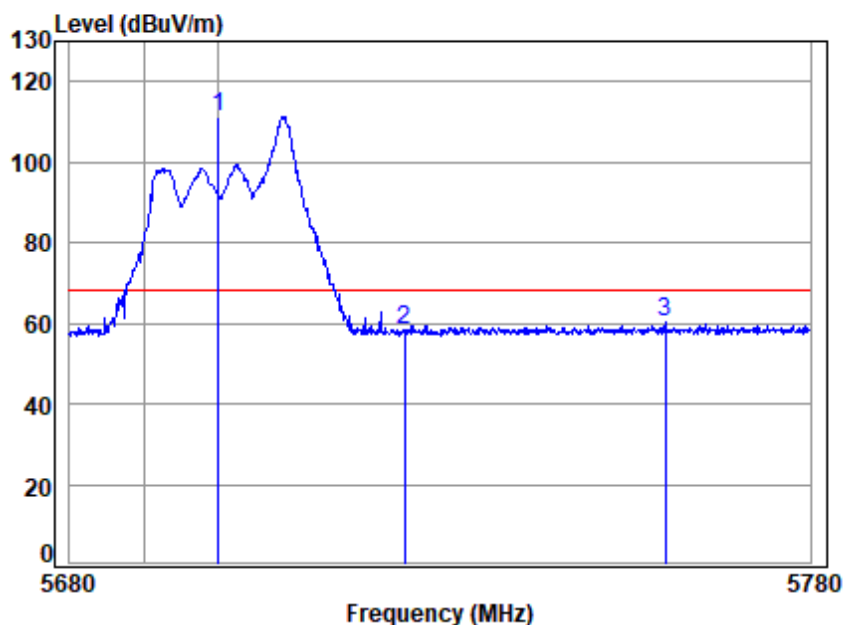

Condition: 3m VERTICAL


Job No : 04261WM

Mode : 5700 Band edge

: 5G Wi-Fi 11ax20 RU26

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5700.000	10.56	33.20	30.72	98.23	111.27	68.20	43.07	peak
2	5725.000	10.68	33.25	30.72	45.13	58.34	68.20	-9.86	peak
3	5760.262	10.84	33.32	30.73	46.79	60.22	68.20	-7.98	peak

11ax_20M_Partial_RU52_TX_CH_100_Horizontal

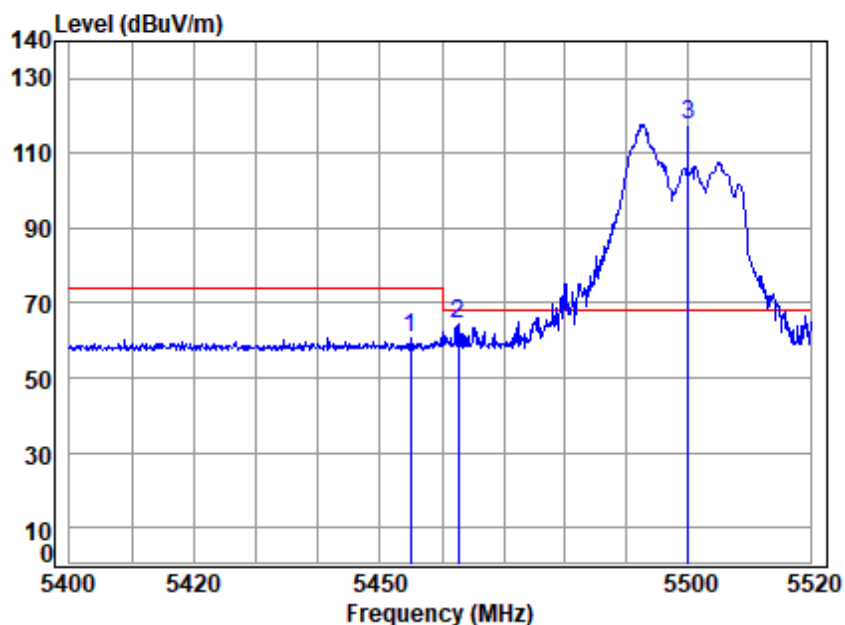

Condition: 3m HORIZONTAL


Job No : 04261WM

Mode : 5500 Band edge

: 5G Wi-Fi 11ax20 RU52

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5454.873	10.60	32.90	30.64	47.80	60.66	74.00	-13.34	peak
2	5462.671	10.59	32.90	30.65	51.61	64.45	68.20	-3.75	peak
3	5500.000	10.58	32.90	30.66	105.04	117.86	68.20	49.66	peak


11ax_20M_Partial_RU52_TX_CH_100_Horizontal

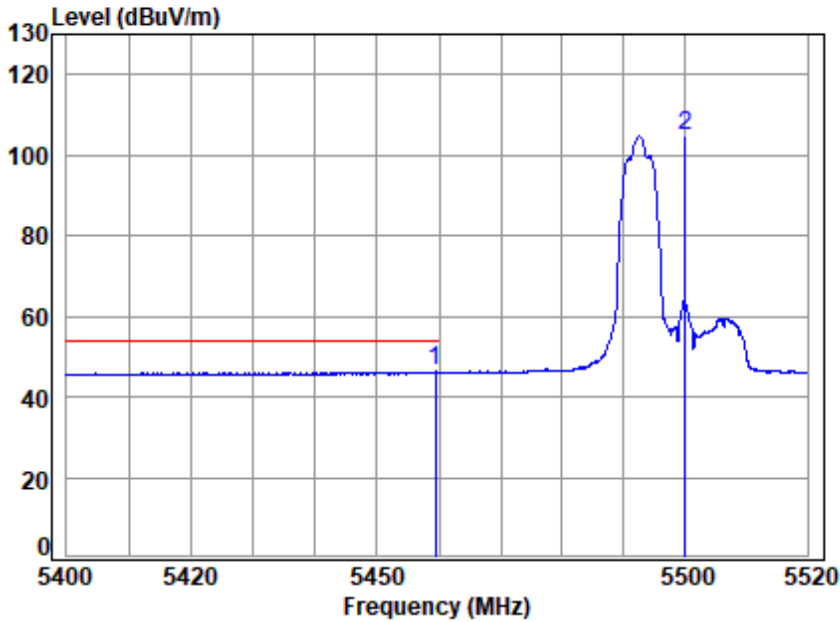

Condition: 3m HORIZONTAL
 Job No : 04261WM
 Mode : 5500 Band edge
 : 5G Wi-Fi 11ax20 RU52

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5459.430	10.60	32.90	30.64	33.38	46.24	54.00	-7.76	Average
2	5500.000	10.58	32.90	30.66	91.90	104.72	-----	-----	Average

11ax_20M_Partial_RU52_TX_CH_100_Vertical

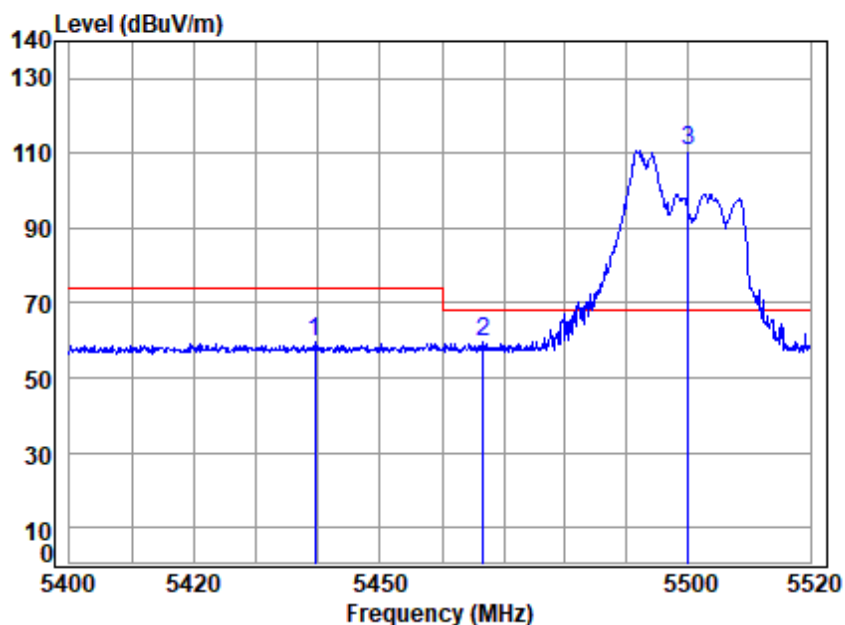

Condition: 3m VERTICAL


Job No : 04261WM

Mode : 5500 Band edge

: 5G Wi-Fi 11ax20 RU52

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5439.428	10.60	32.88	30.64	46.86	59.70	74.00	-14.30	peak
2	5466.755	10.59	32.90	30.65	46.53	59.37	68.20	-8.83	peak
3	5500.000	10.58	32.90	30.66	97.95	110.77	68.20	42.57	peak

11ax_20M_Partial_RU52_TX_CH_100_Vertical

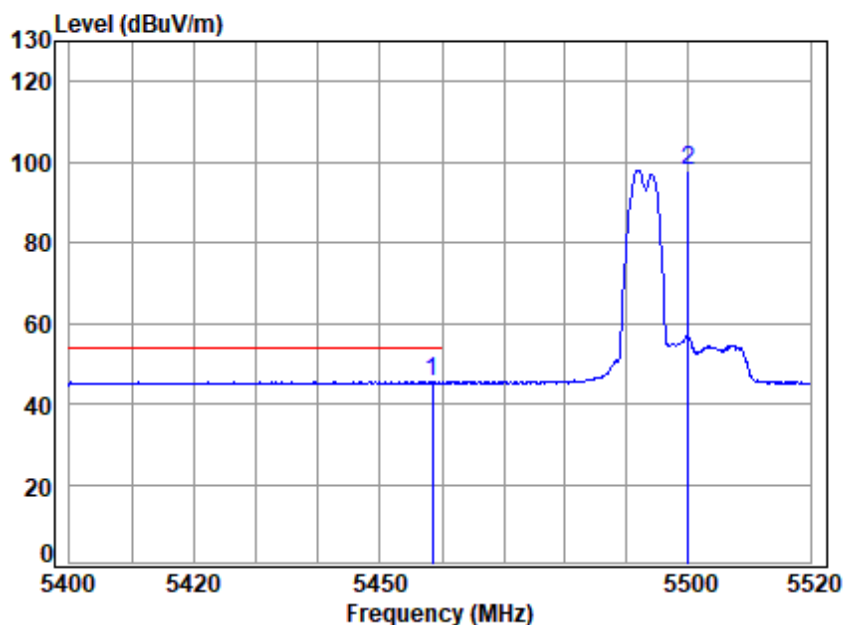

Condition: 3m VERTICAL


Job No : 04261WM

Mode : 5500 Band edge

: 5G Wi-Fi 11ax20 RU52

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5458.471	10.60	32.90	30.64	32.70	45.56	54.00	-8.44	Average
2	5500.000	10.58	32.90	30.66	85.17	97.99	-----	-----	Average


11ax_20M_Partial_RU52_TX_CH_140_Horizontal

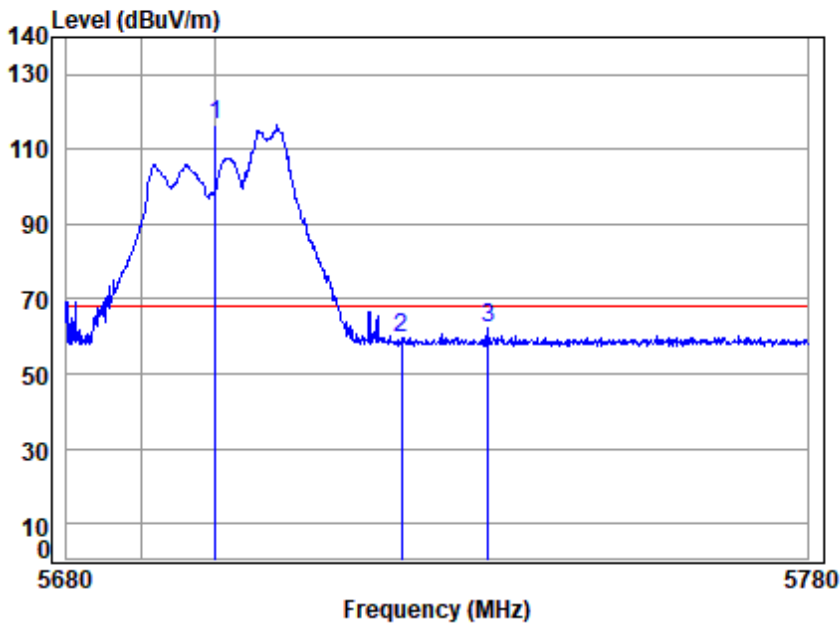

Condition: 3m HORIZONTAL
Job No : 04261WM
Mode : 5700 Band edge
: 5G Wi-Fi 11ax20 RU52

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5700.000	10.56	33.20	30.72	103.28	116.32	68.20	48.12	peak
2	5725.000	10.68	33.25	30.72	46.48	59.69	68.20	-8.51	peak
3	5736.686	10.73	33.27	30.73	48.93	62.20	68.20	-6.00	peak

11ax_20M_Partial_RU52_TX_CH_140_Vertical

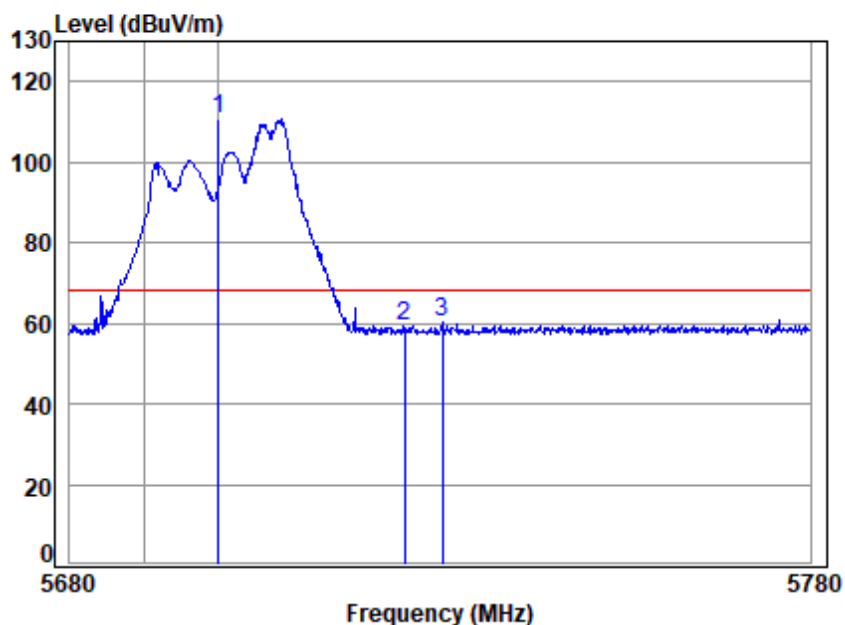

Condition: 3m VERTICAL


Job No : 04261WM

Mode : 5700 Band edge

: 5G Wi-Fi 11ax20 RU52

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5700.000	10.56	33.20	30.72	97.54	110.58	68.20	42.38	peak
2	5725.000	10.68	33.25	30.72	45.98	59.19	68.20	-9.01	peak
3	5730.082	10.70	33.26	30.72	47.14	60.38	68.20	-7.82	peak

11ax_20M_Partial_RU106_TX_CH_100_Horizontal

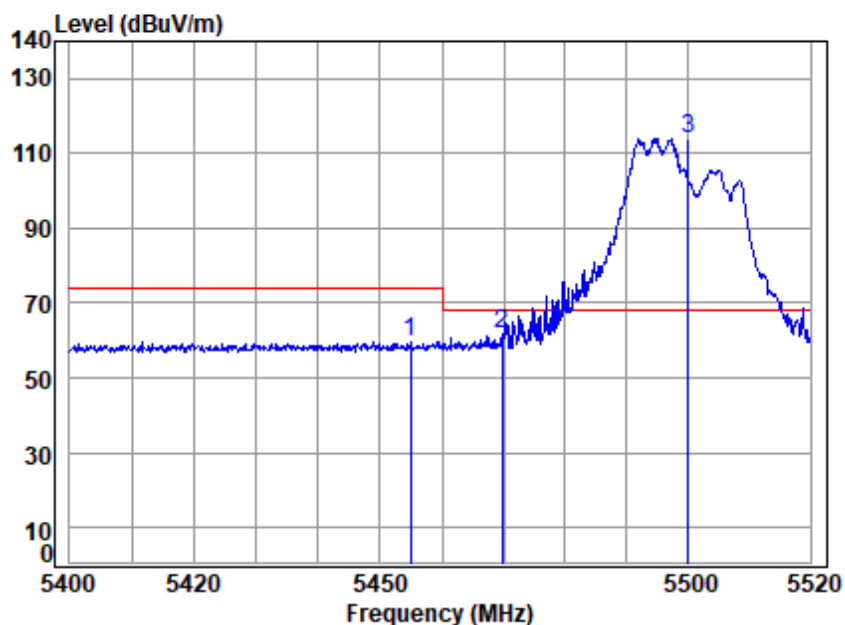

Condition: 3m HORIZONTAL


Job No : 04261WM

Mode : 5500 Band edge

: 5G Wi-Fi 11ax20 RU106

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5454.992	10.60	32.90	30.64	46.72	59.58	74.00	-14.42	peak
2	5469.759	10.59	32.90	30.65	49.17	62.01	68.20	-6.19	peak
3	5500.000	10.58	32.90	30.66	101.22	114.04	68.20	45.84	peak


11ax_20M_Partial_RU106_TX_CH_100_Horizontal

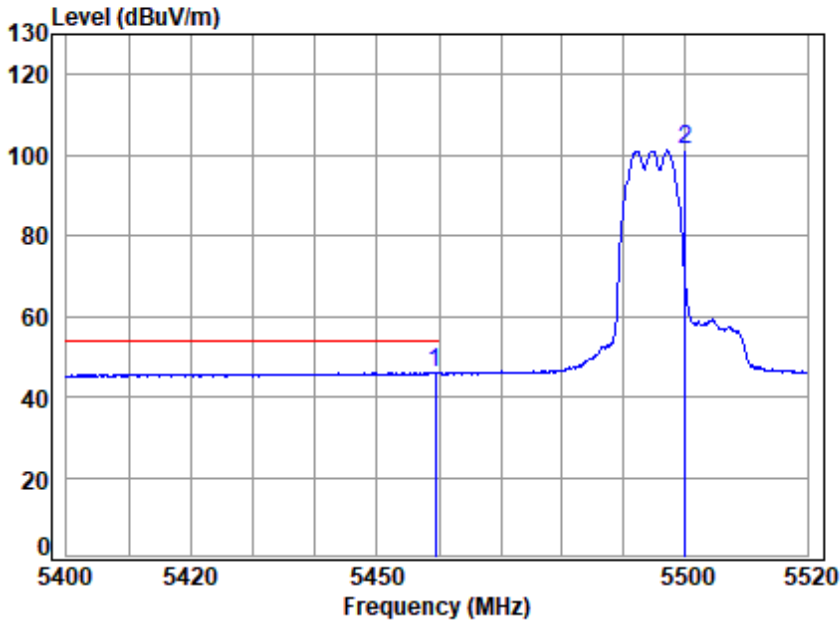

Condition: 3m HORIZONTAL
Job No : 04261WM
Mode : 5500 Band edge
: 5G Wi-Fi 11ax20 RU106

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5459.430	10.60	32.90	30.64	33.12	45.98	54.00	-8.02	Average
2	5500.000	10.58	32.90	30.66	88.28	101.10	-----	-----	Average

11ax_20M_Partial_RU106_TX_CH_100_Vertical

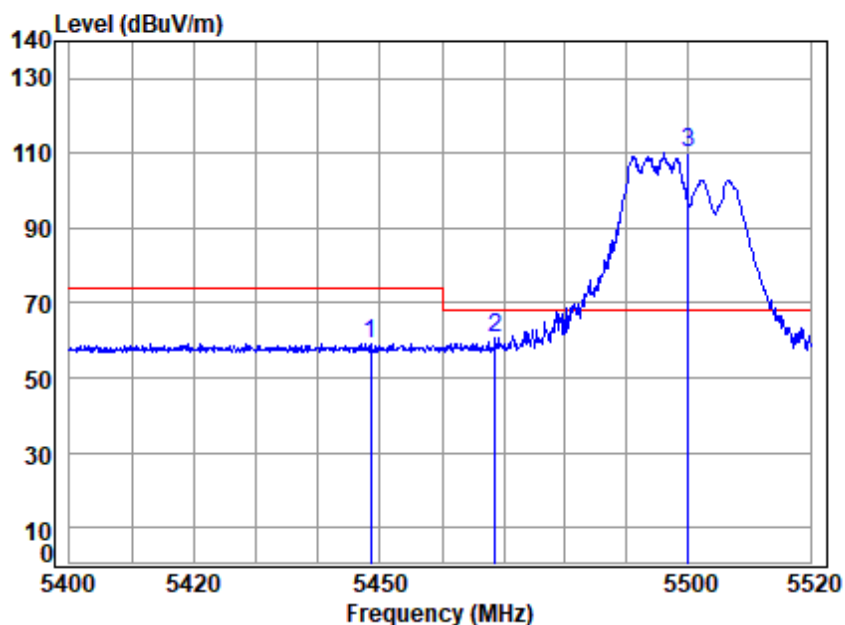

Condition: 3m VERTICAL


Job No : 04261WM

Mode : 5500 Band edge

: 5G Wi-Fi 11ax20 RU106

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5448.402	10.60	32.90	30.64	46.26	59.12	74.00	-14.88	peak
2	5468.557	10.59	32.90	30.65	47.96	60.80	68.20	-7.40	peak
3 pp	5500.000	10.58	32.90	30.66	97.28	110.10	68.20	41.90	peak

11ax_20M_Partial_RU106_TX_CH_100_Vertical

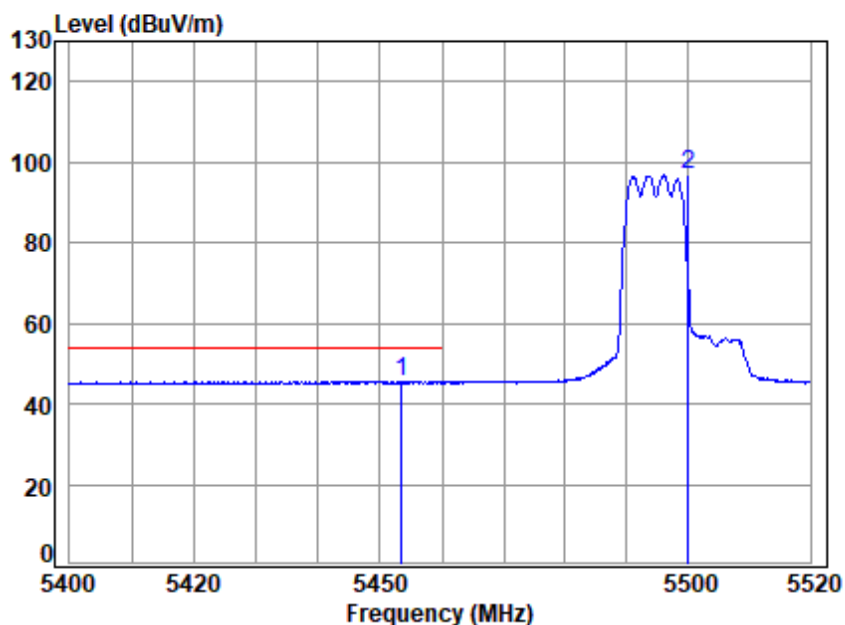

Condition: 3m VERTICAL


Job No : 04261WM

Mode : 5500 Band edge

: 5G Wi-Fi 11ax20 RU106

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5453.434	10.60	32.90	30.64	32.78	45.64	54.00	-8.36	Average
2	5500.000	10.58	32.90	30.66	83.84	96.66	-----	-----	Average

11ax_20M_Partial_RU106_TX_CH_140_Horizontal

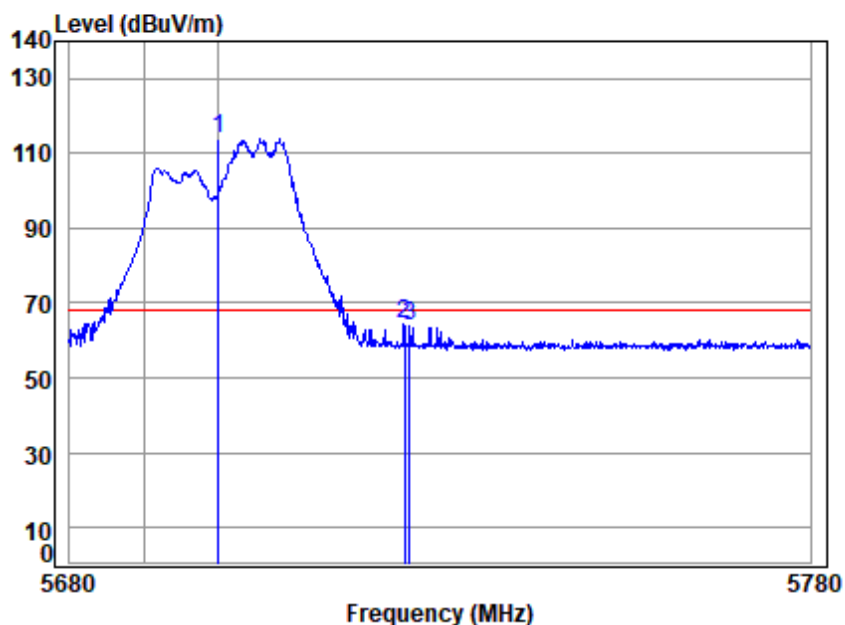

Condition: 3m HORIZONTAL


Job No : 04261WM

Mode : 5700 Band edge

: 5G Wi-Fi 11ax20 RU106

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5700.000	10.56	33.20	30.72	100.78	113.82	68.20	45.62	peak
2	5725.000	10.68	33.25	30.72	51.31	64.52	68.20	-3.68	peak
3	5725.684	10.68	33.25	30.72	50.67	63.88	68.20	-4.32	peak

11ax_20M_Partial_RU106_TX_CH_140_Vertical

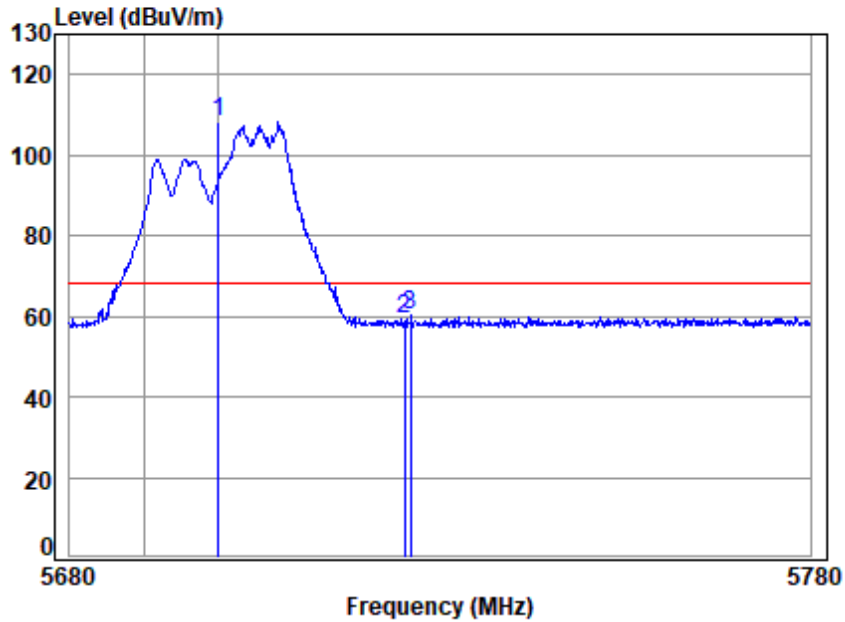

Condition: 3m VERTICAL


Job No : 04261WM

Mode : 5700 Band edge

: 5G Wi-Fi 11ax20 RU106

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5700.000	10.56	33.20	30.72	95.16	108.20	68.20	40.00	peak
2	5725.000	10.68	33.25	30.72	45.97	59.18	68.20	-9.02	peak
3	5725.883	10.68	33.25	30.72	46.92	60.13	68.20	-8.07	peak

11ax_40M_Partial_RU242_TX_CH_102_Horizontal

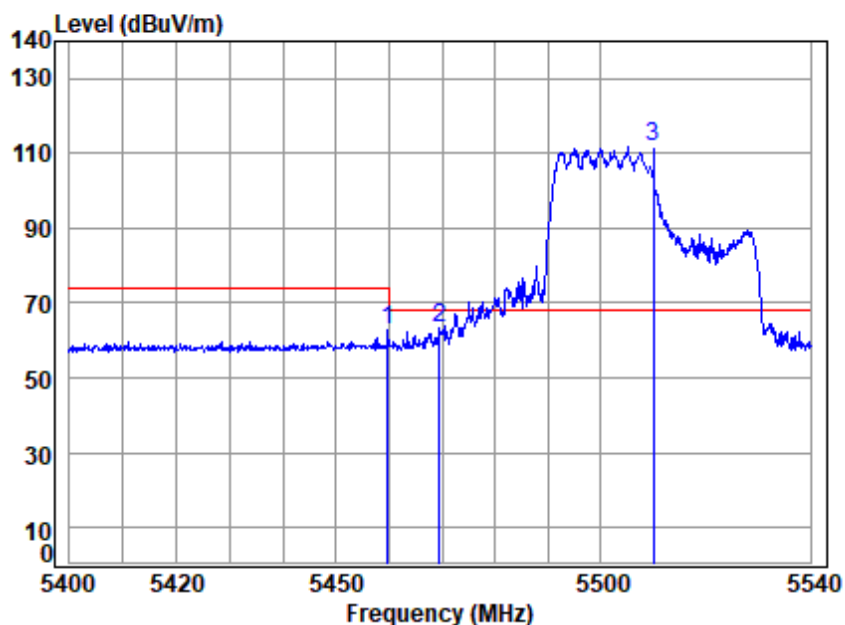

Condition: 3m HORIZONTAL


Job No : 04261WM

Mode : 5510 Band edge

: 5G Wi-Fi 11ax40 RU242

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5459.622	10.60	32.90	30.64	49.82	62.68	74.00	-11.32	peak
2	5469.552	10.59	32.90	30.65	50.66	63.50	68.20	-4.70	peak
3	5510.000	10.56	32.90	30.66	98.93	111.73	68.20	43.53	peak

11ax_40M_Partial_RU242_TX_CH_102_Horizontal

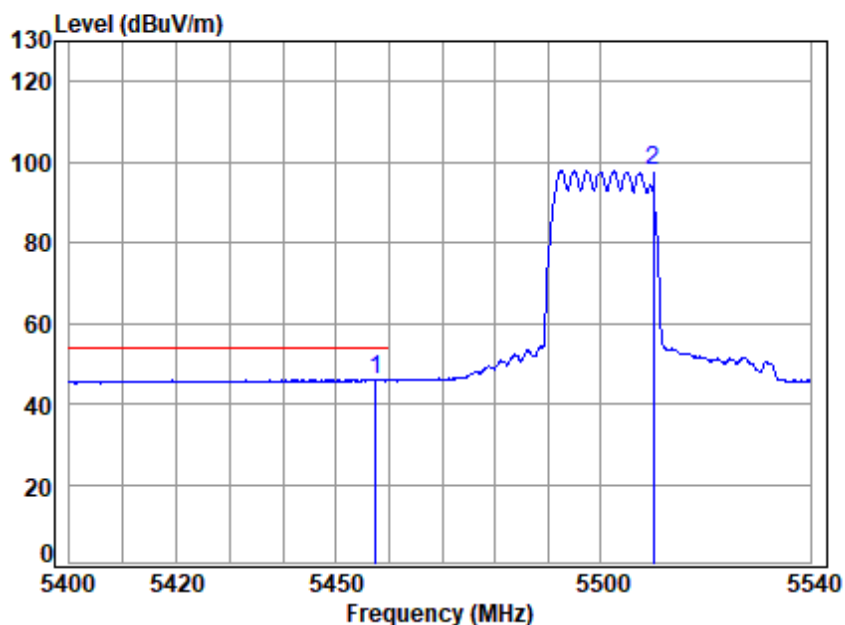

Condition: 3m HORIZONTAL


Job No : 04261WM

Mode : 5510 Band edge

: 5G Wi-Fi 11ax40 RU242

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5457.526	10.60	32.90	30.64	33.21	46.07	54.00	-7.93	Average
2	5510.000	10.56	32.90	30.66	84.96	97.76	-----	-----	Average


11ax_40M_Partial_RU242_TX_CH_102_Vertical

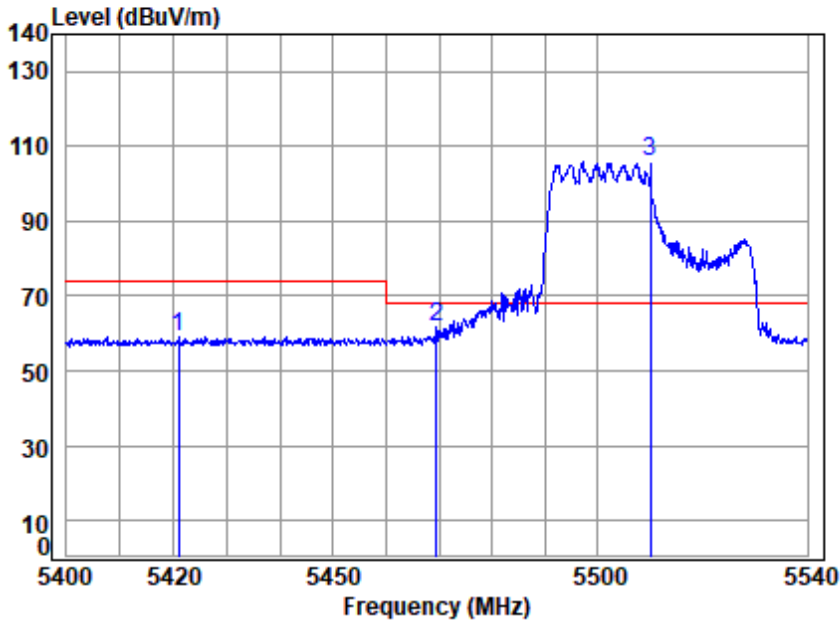

Condition: 3m VERTICAL
Job No : 04261WM
Mode : 5510 Band edge
: 5G Wi-Fi 11ax40 RU242

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5420.911	10.61	32.84	30.63	46.47	59.29	74.00	-14.71	peak
2	5469.552	10.59	32.90	30.65	49.06	61.90	68.20	-6.30	peak
3	5510.000	10.56	32.90	30.66	93.21	106.01	68.20	37.81	peak

11ax_40M_Partial_RU242_TX_CH_102_Vertical

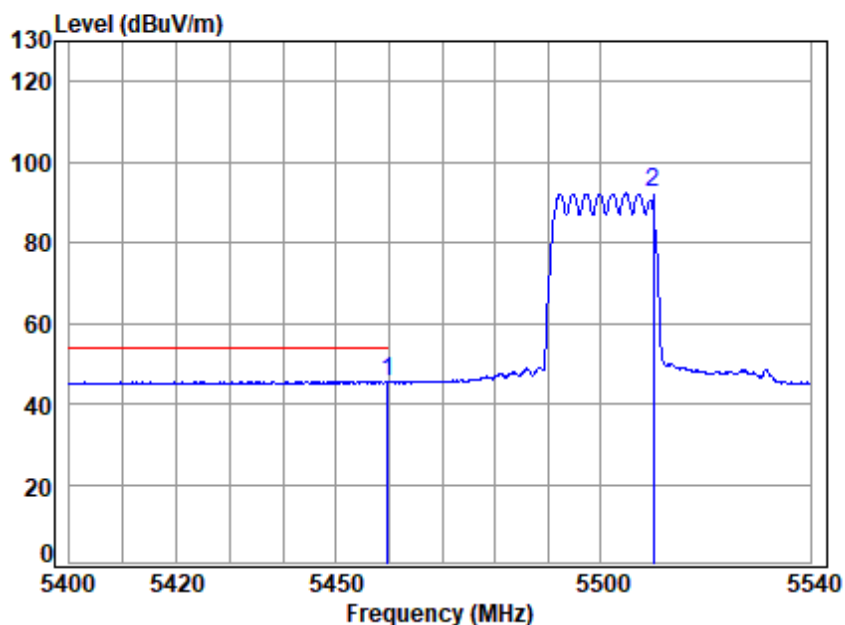

Condition: 3m VERTICAL


Job No : 04261WM

Mode : 5510 Band edge

: 5G Wi-Fi 11ax40 RU242

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5459.761	10.60	32.90	30.64	32.71	45.57	54.00	-8.43	Average
2	5510.000	10.56	32.90	30.66	79.46	92.26	-----	-----	Average

11ax_40M_Partial_RU242_TX_CH_134_Horizontal

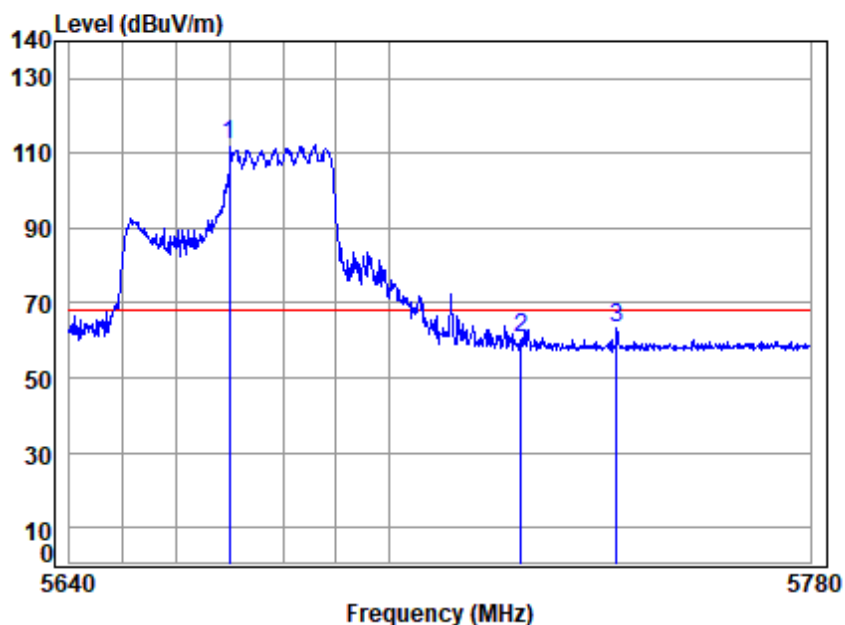

Condition: 3m HORIZONTAL


Job No : 04261WM

Mode : 5670 Band edge

: 5G Wi-Fi 11ax40 RU242

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5670.000	10.52	33.14	30.71	99.31	112.26	68.20	44.06	peak
2	5725.000	10.68	33.25	30.72	47.43	60.64	68.20	-7.56	peak
3	5743.128	10.76	33.29	30.73	49.91	63.23	68.20	-4.97	peak

11ax_40M_Partial_RU242_TX_CH_134_Vertical

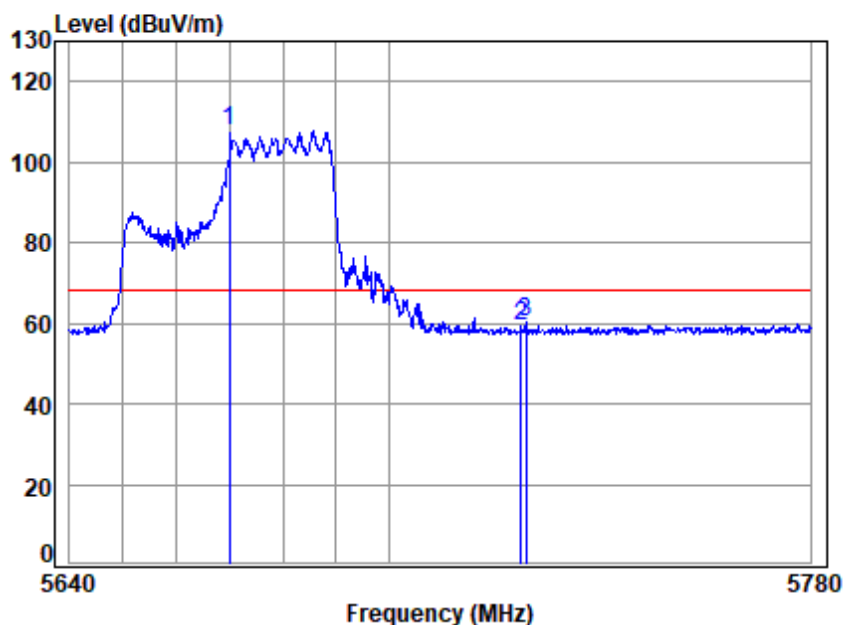

Condition: 3m VERTICAL


Job No : 04261WM

Mode : 5670 Band edge

: 5G Wi-Fi 11ax40 RU242

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5670.000	10.52	33.14	30.71	94.75	107.70	68.20	39.50	peak
2	5725.000	10.68	33.25	30.72	45.90	59.11	68.20	-9.09	peak
3	5725.833	10.68	33.25	30.72	47.23	60.44	68.20	-7.76	peak

11ax_80M_Partial_RU484_TX_CH_106_Horizontal

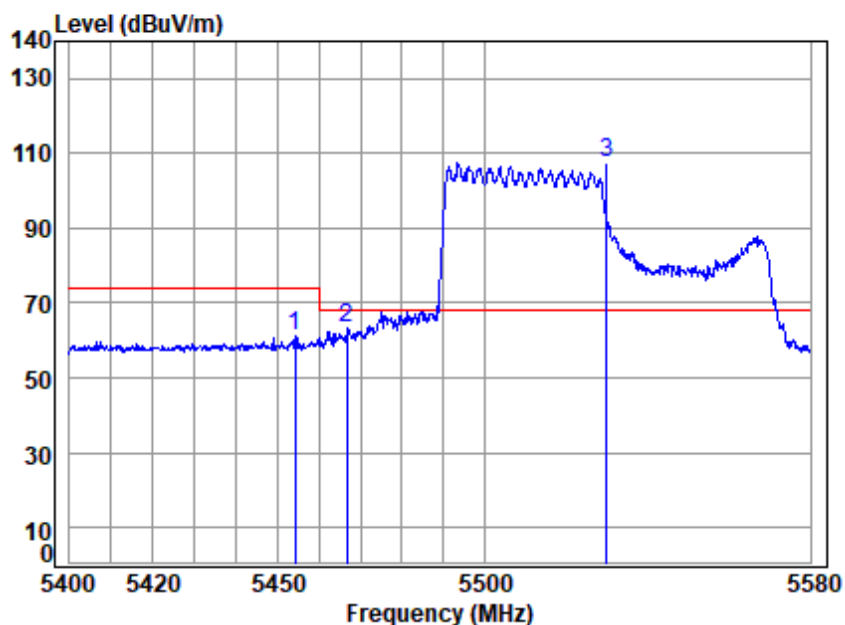

Condition: 3m HORIZONTAL


Job No : 04261WM

Mode : 5530 Band edge

: 5G Wi-Fi 11ax80 RU484

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5454.097	10.60	32.90	30.64	48.27	61.13	74.00	-12.87	peak
2	5466.630	10.59	32.90	30.65	50.74	63.58	68.20	-4.62	peak
3 pp	5530.000	10.53	32.90	30.67	94.95	107.71	68.20	39.51	peak

11ax_80M_Partial_RU484_TX_CH_106_Horizontal

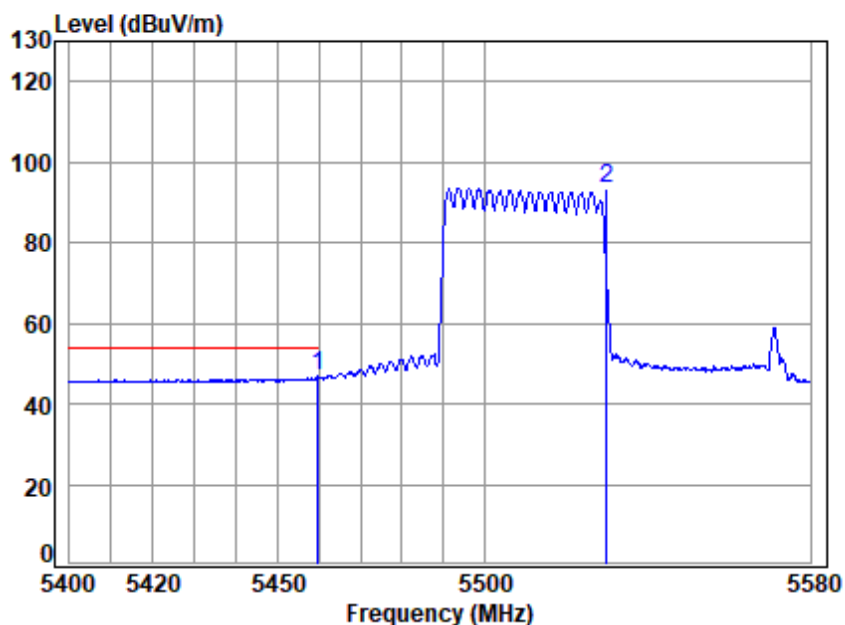

Condition: 3m HORIZONTAL


Job No : 04261WM

Mode : 5530 Band edge

: 5G Wi-Fi 11ax80 RU484

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5459.823	10.60	32.90	30.64	34.12	46.98	54.00	-7.02	Average
2	5530.000	10.53	32.90	30.67	80.88	93.64	-----	-----	Average


11ax_80M_Partial_RU484_TX_CH_106_Vertical

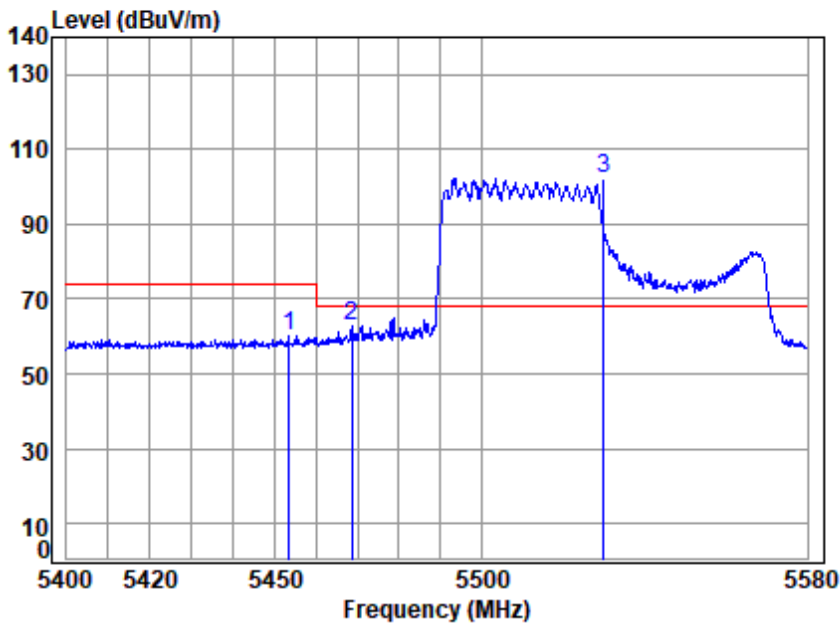

Condition: 3m VERTICAL
Job No : 04261WM
Mode : 5530 Band edge
: 5G Wi-Fi 11ax80 RU484

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5453.382	10.60	32.90	30.64	47.28	60.14	74.00	-13.86	peak
2	5468.602	10.59	32.90	30.65	49.77	62.61	68.20	-5.59	peak
3 pp	5530.000	10.53	32.90	30.67	89.59	102.35	68.20	34.15	peak

11ax_80M_Partial_RU484_TX_CH_106_Vertical

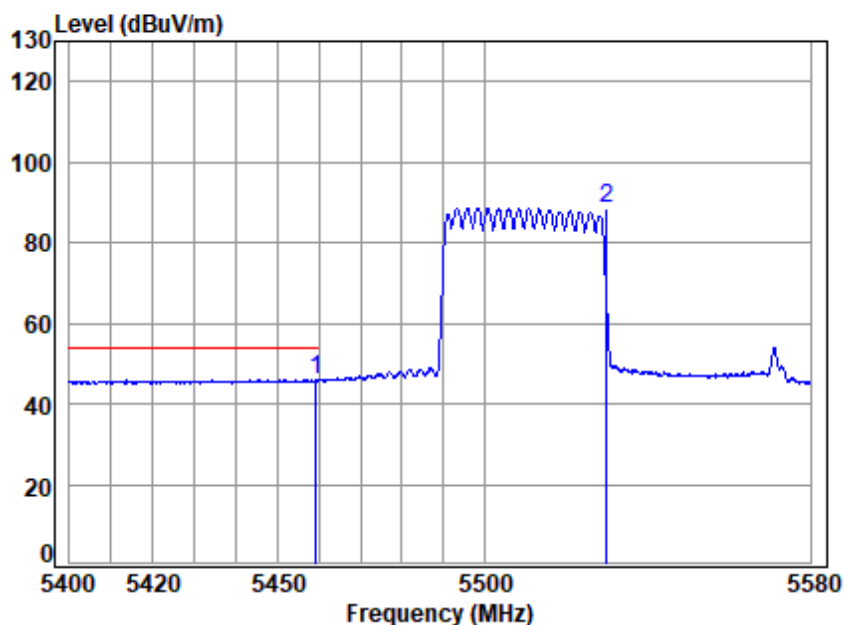

Condition: 3m VERTICAL


Job No : 04261WM

Mode : 5530 Band edge

: 5G Wi-Fi 11ax80 RU484

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5459.286	10.60	32.90	30.64	33.11	45.97	54.00	-8.03	Average
2	5530.000	10.53	32.90	30.67	75.85	88.61	-----	-----	Average

11ax_80M_Partial_RU484_TX_CH_122_Horizontal

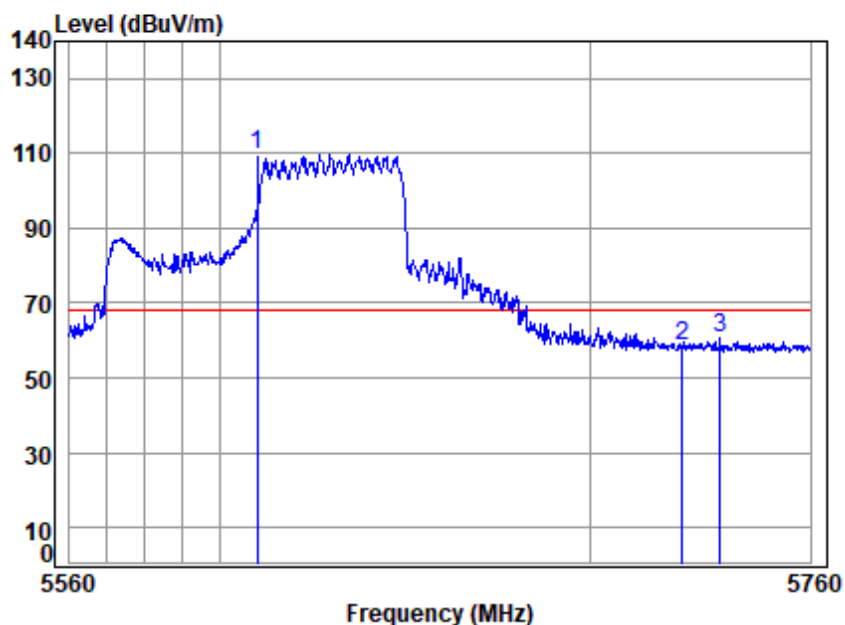

Condition: 3m HORIZONTAL


Job No : 04261WM

Mode : 5610 Band edge

: 5G Wi-Fi 11ax80 RU484

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5610.000	10.43	33.02	30.69	97.14	109.90	68.20	41.70	peak
2	5725.000	10.68	33.25	30.72	45.38	58.59	68.20	-9.61	peak
3	5735.220	10.72	33.27	30.73	47.24	60.50	68.20	-7.70	peak

11ax_80M_Partial_RU484_TX_CH_122_Vertical

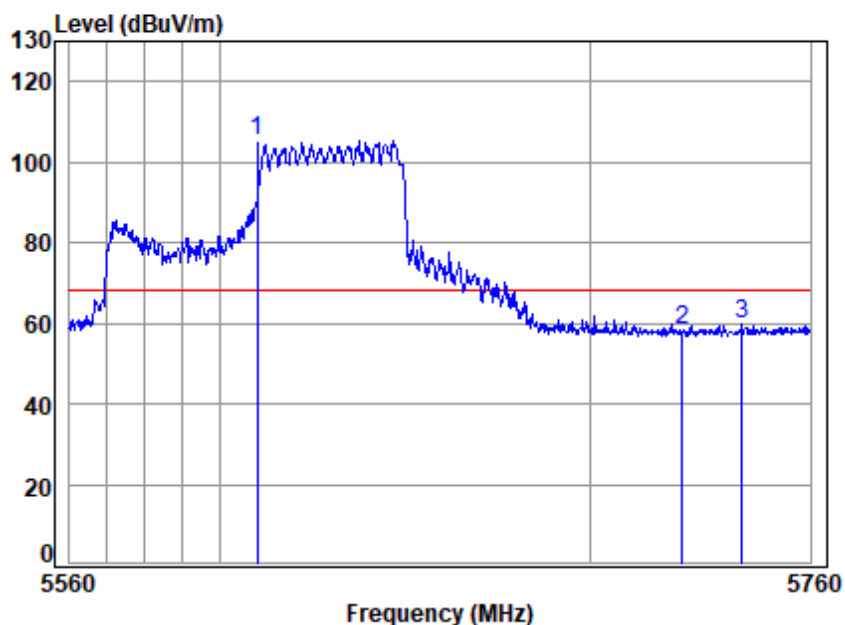

Condition: 3m VERTICAL


Job No : 04261WM

Mode : 5610 Band edge

: 5G Wi-Fi 11ax80 RU484

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5610.000	10.43	33.02	30.69	92.42	105.18	68.20	36.98	peak
2	5725.000	10.68	33.25	30.72	45.06	58.27	68.20	-9.93	peak
3	5741.303	10.75	33.28	30.73	46.30	59.60	68.20	-8.60	peak

11ax_160M_Partial_RU996_TX_CH_114_Horizontal

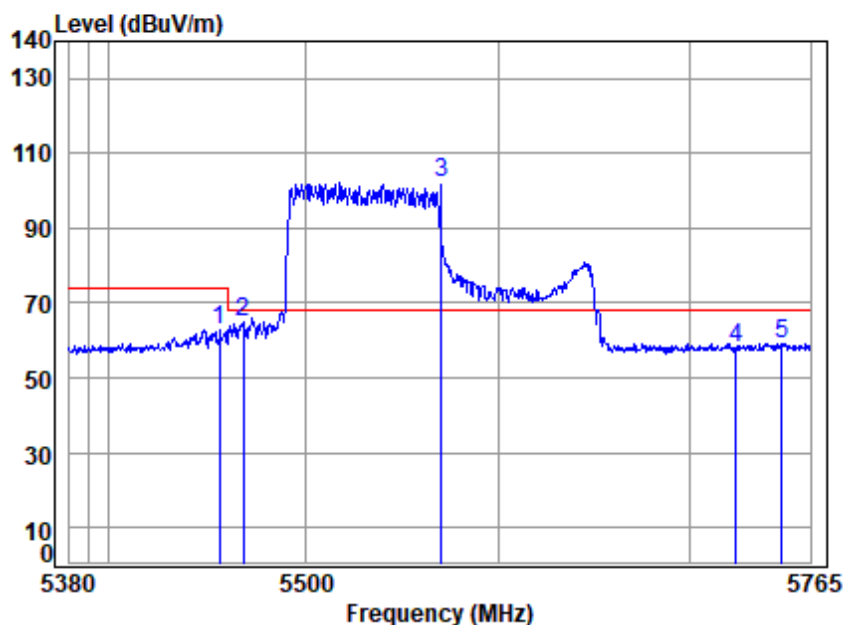

Condition: 3m HORIZONTAL


Job No : 04261WM

Mode : 5570 Band edge

: 5G Wi-Fi 11ax160 RU996

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5456.017	10.60	32.90	30.64	50.03	62.89	74.00	-11.11	peak
2	5468.098	10.59	32.90	30.65	52.00	64.84	68.20	-3.36	peak
3 pp	5570.000	10.46	32.94	30.68	89.29	102.01	68.20	33.81	peak
4	5725.000	10.68	33.25	30.72	44.75	57.96	68.20	-10.24	peak
5	5749.878	10.79	33.30	30.73	45.84	59.20	68.20	-9.00	peak

11ax_160M_Partial_RU996_TX_CH_114_Horizontal

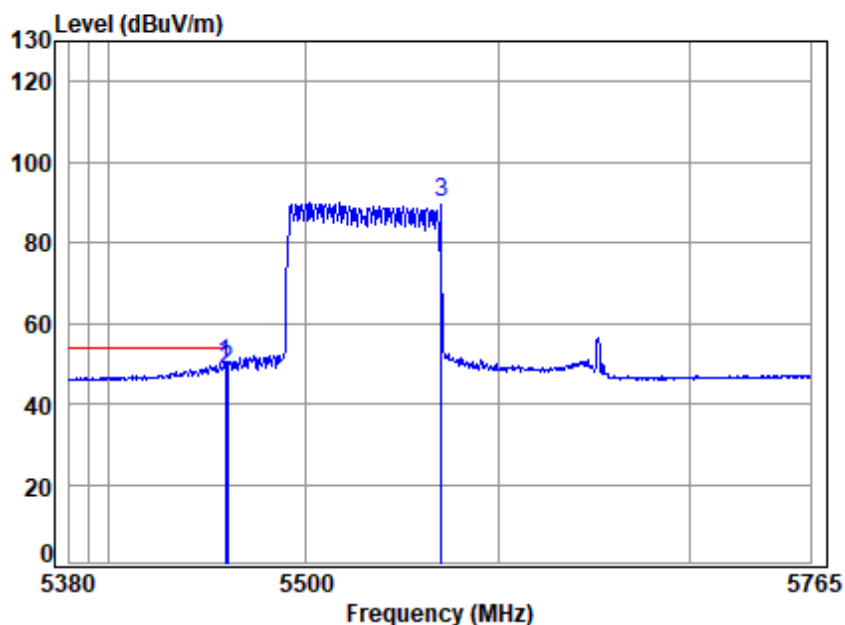

Condition: 3m HORIZONTAL


Job No : 04261WM

Mode : 5570 Band edge

: 5G Wi-Fi 11ax160 RU996

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5458.658	10.60	32.90	30.64	37.25	50.11	54.00	-3.89	Average
2	5460.000	10.60	32.90	30.64	35.73	48.59	54.00	-5.41	Average
3	5570.000	10.46	32.94	30.68	77.08	89.80	-----	-----	Average

11ax_160M_Partial_RU996_TX_CH_114_Vertical

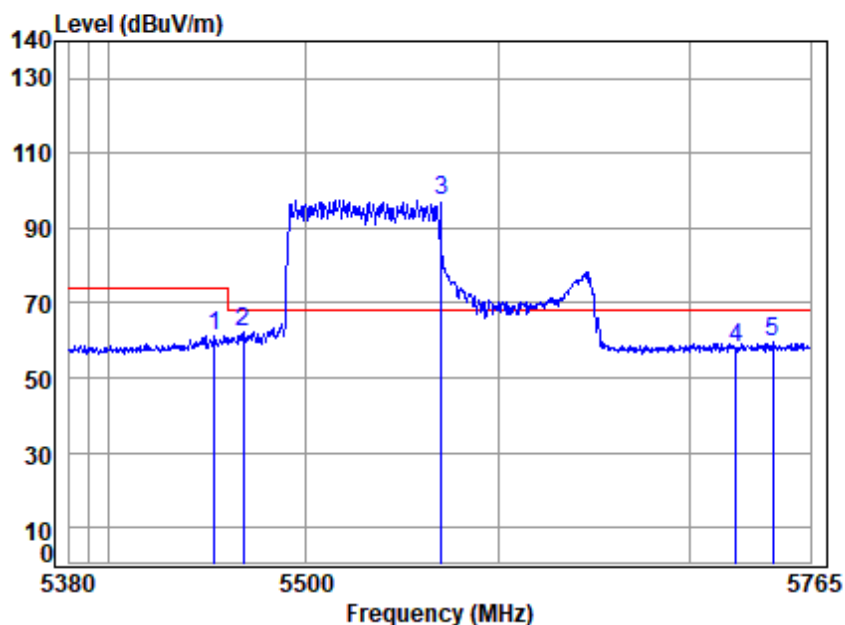

Condition: 3m VERTICAL


Job No : 04261WM

Mode : 5570 Band edge

: 5G Wi-Fi 11ax160 RU996

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5453.378	10.60	32.90	30.64	48.41	61.27	74.00	-12.73	peak
2	5467.720	10.59	32.90	30.65	49.44	62.28	68.20	-5.92	peak
3 pp	5570.000	10.46	32.94	30.68	84.87	97.59	68.20	29.39	peak
4	5725.000	10.68	33.25	30.72	44.85	58.06	68.20	-10.14	peak
5	5745.111	10.77	33.29	30.73	46.09	59.42	68.20	-8.78	peak

11ax_160M_Partial_RU996_TX_CH_114_Vertical

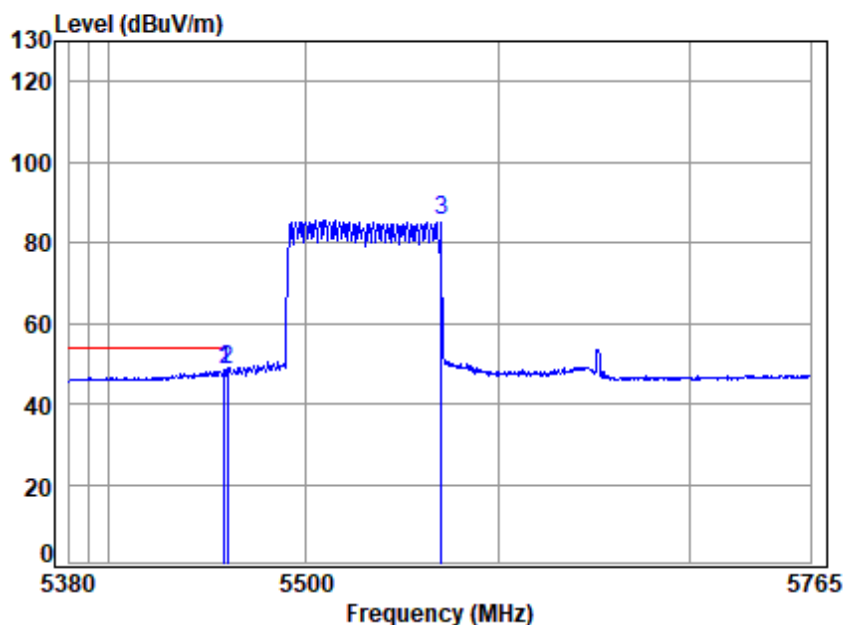

Condition: 3m VERTICAL


Job No : 04261WM

Mode : 5570 Band edge

: 5G Wi-Fi 11ax160 RU996

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5458.280	10.60	32.90	30.64	35.54	48.40	54.00	-5.60	Average
2	5460.000	10.60	32.90	30.64	35.36	48.22	54.00	-5.78	Average
3	5570.000	10.46	32.94	30.68	72.86	85.58	-----	-----	Average

11a_TX_CH_149_Horizontal

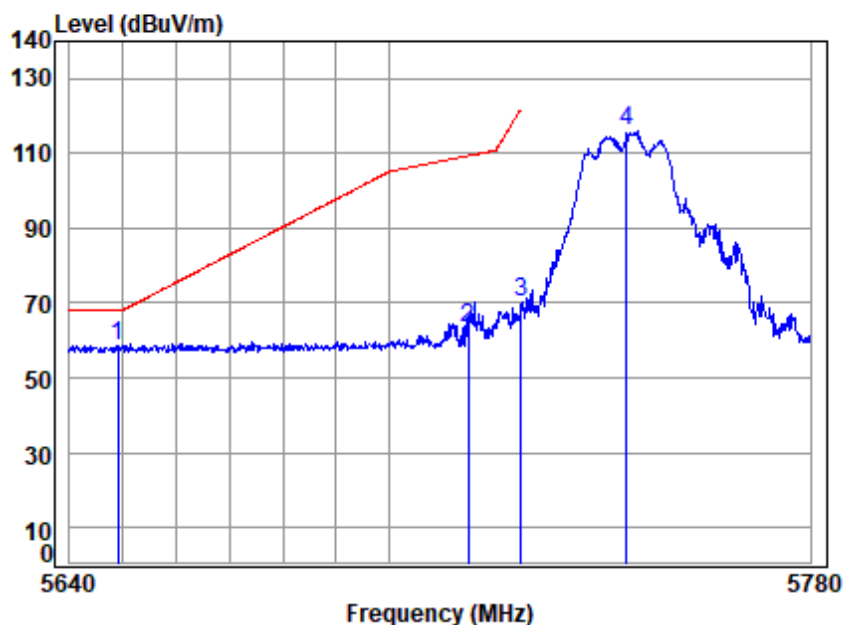

Condition: 3m HORIZONTAL


Job No : 04261WM

Mode : 5745 Band edge

: 5.8G Wi-Fi 11a

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5648.996	10.48	33.10	30.70	45.90	58.78	68.20	-9.42 peak
2	5715.000	10.63	33.23	30.72	50.02	63.16	109.40	-46.24 peak
3	5725.000	10.68	33.25	30.72	56.82	70.03	122.20	-52.17 peak
4	5745.000	10.77	33.29	30.73	102.52	115.85	-----	----- peak

11a_TX_CH_149_Vertical

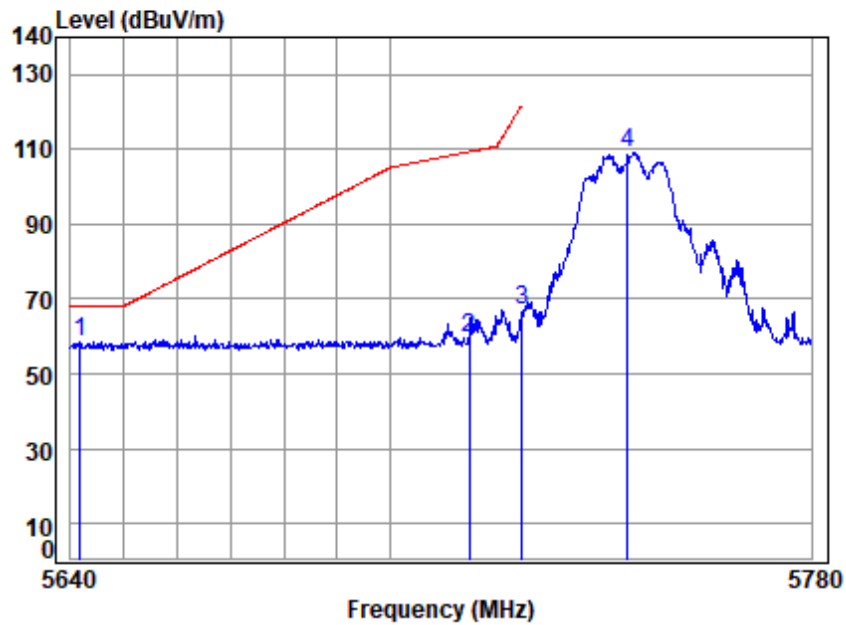

Condition: 3m VERTICAL


Job No : 04261WM

Mode : 5745 Band edge

: 5.8G Wi-Fi 11a

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5641.798	10.47	33.08	30.70	45.79	58.64	68.20	-9.56 peak
2	5715.000	10.63	33.23	30.72	46.67	59.81	109.40	-49.59 peak
3	5725.000	10.68	33.25	30.72	53.83	67.04	122.20	-55.16 peak
4	5745.000	10.77	33.29	30.73	95.71	109.04	-----	----- peak

11a_TX_CH_165_Horizontal

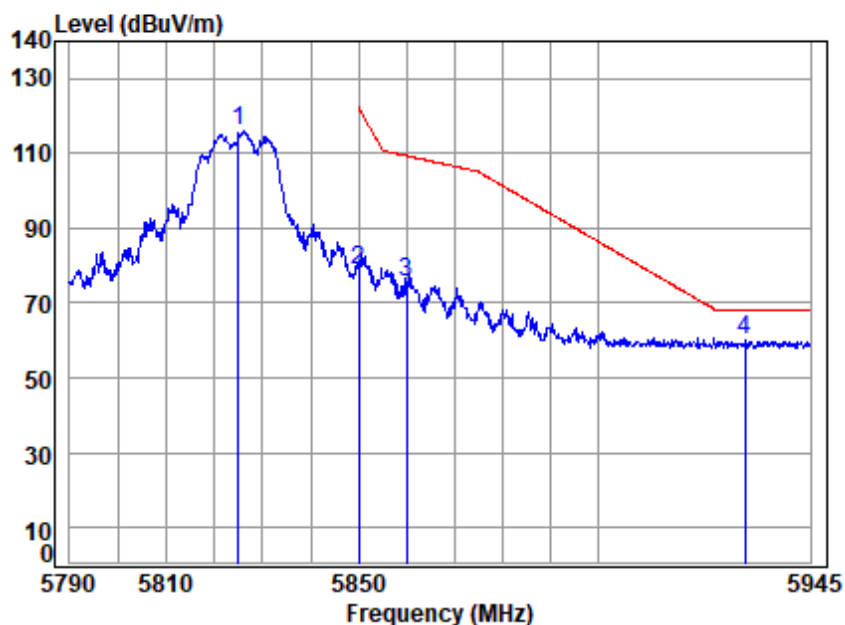

Condition: 3m HORIZONTAL


Job No : 04261WM

Mode : 5825 Band edge

: 5.8G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5825.000	10.99	33.50	30.75	102.06	115.80	-----	-----	peak
2	5850.000	10.95	33.60	30.76	64.96	78.75	122.20	-43.45	peak
3	5860.000	10.94	33.58	30.76	61.75	75.51	109.40	-33.89	peak
4 pp	5931.195	10.86	33.56	30.78	46.32	59.96	68.20	-8.24	peak

11a_TX_CH_165_Vertical

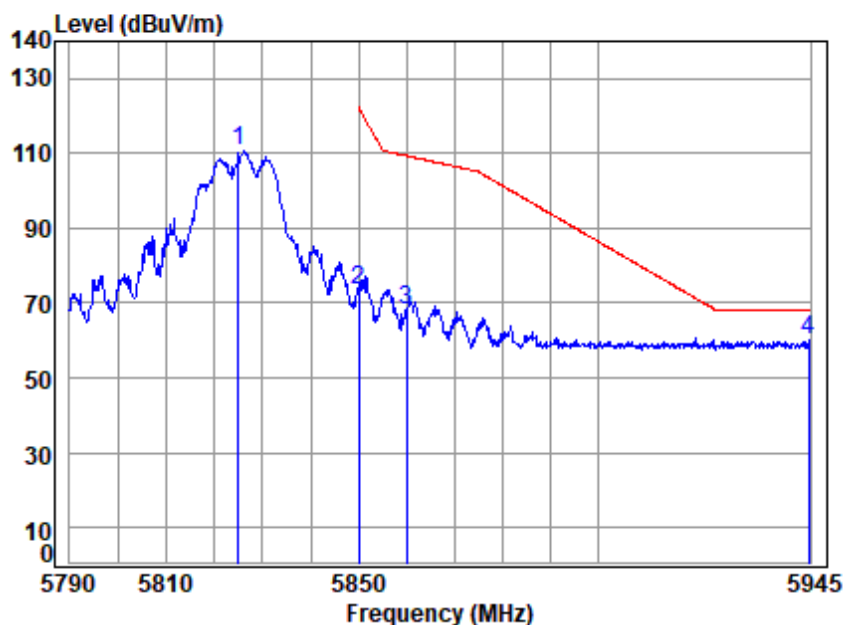

Condition: 3m VERTICAL


Job No : 04261WM

Mode : 5825 Band edge

: 5.8G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5825.000	10.99	33.50	30.75	96.73	110.47	-----	-----	peak
2	5850.000	10.95	33.60	30.76	59.56	73.35	122.20	-48.85	peak
3	5860.000	10.94	33.58	30.76	54.64	68.40	109.40	-41.00	peak
4 pp	5944.686	10.85	33.59	30.78	46.32	59.98	68.20	-8.22	peak

11ac_VHT(20M)_TX_CH_149_Horizontal

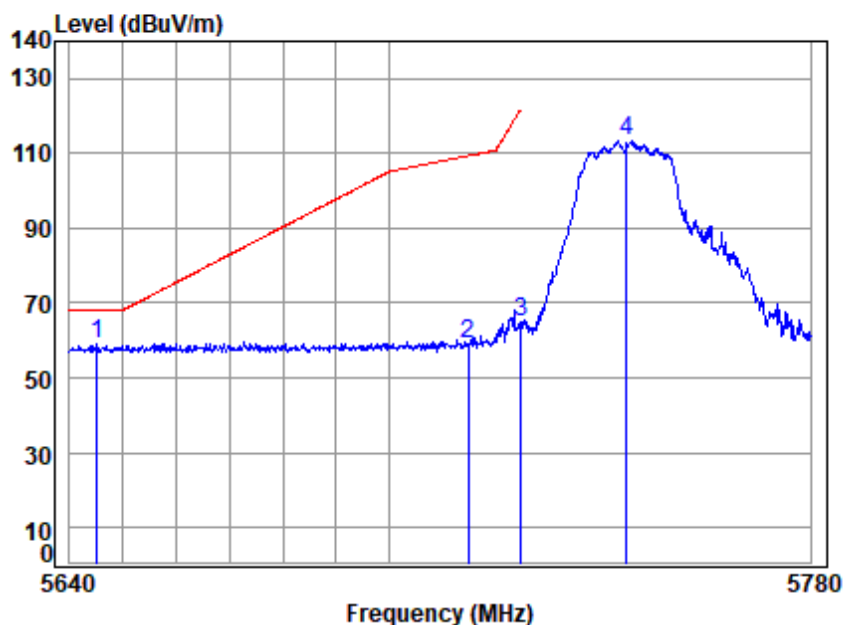

Condition: 3m HORIZONTAL


Job No : 04261WM

Mode : 5745 Band edge

: 5.8G Wi-Fi 11ac20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5645.119	10.48	33.09	30.70	46.08	58.95	68.20	-9.25 peak
2	5715.000	10.63	33.23	30.72	46.13	59.27	109.40	-50.13 peak
3	5725.000	10.68	33.25	30.72	51.91	65.12	122.20	-57.08 peak
4	5745.000	10.77	33.29	30.73	100.25	113.58	-----	----- peak

11ac_VHT(20M)_TX_CH_149_Vertical

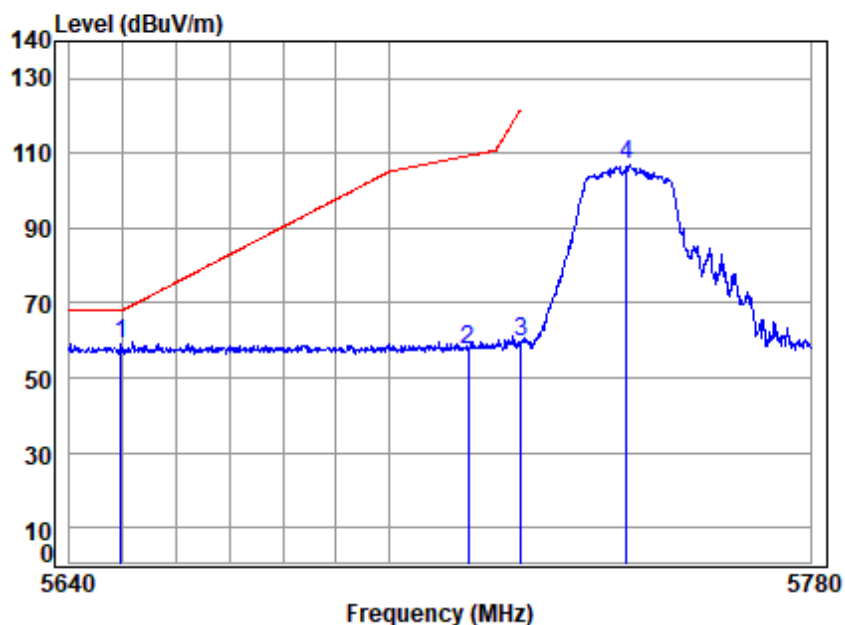

Condition: 3m VERTICAL


Job No : 04261WM

Mode : 5745 Band edge

: 5.8G Wi-Fi 11ac20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5649.550	10.48	33.10	30.70	46.31	59.19	68.20	-9.01 peak
2	5715.000	10.63	33.23	30.72	44.38	57.52	109.40	-51.88 peak
3	5725.000	10.68	33.25	30.72	46.54	59.75	122.20	-62.45 peak
4	5745.000	10.77	33.29	30.73	93.76	107.09	-----	----- peak

11ac_VHT(20M)_TX_CH_165_Horizontal

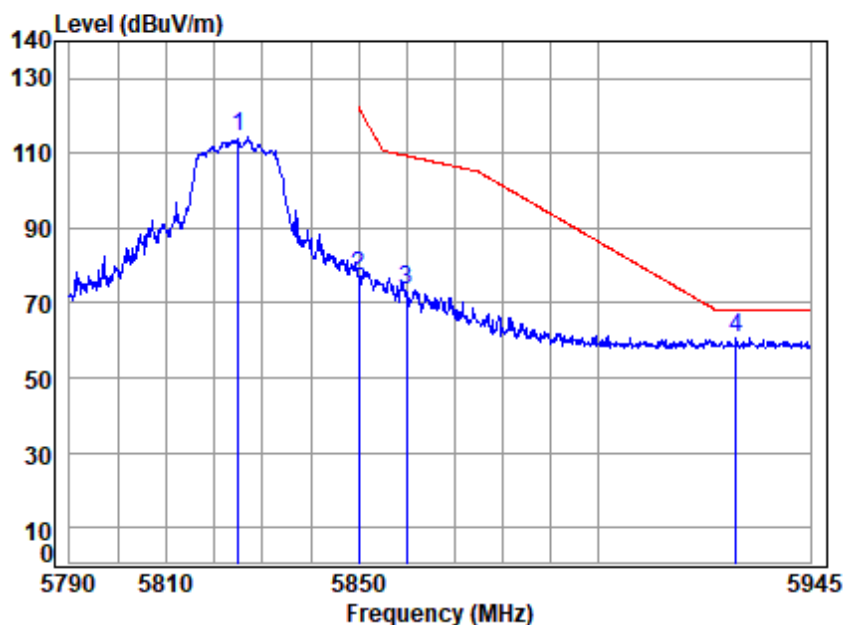

Condition: 3m HORIZONTAL


Job No : 04261WM

Mode : 5825 Band edge

: 5.8G Wi-Fi 11ac20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5825.000	10.99	33.50	30.75	100.45	114.19	-----	-----	peak
2	5850.000	10.95	33.60	30.76	63.43	77.22	122.20	-44.98	peak
3	5860.000	10.94	33.58	30.76	59.54	73.30	109.40	-36.10	peak
4 pp	5929.315	10.87	33.56	30.78	46.83	60.48	68.20	-7.72	peak

11ac_VHT(20M)_TX_CH_165_Vertical

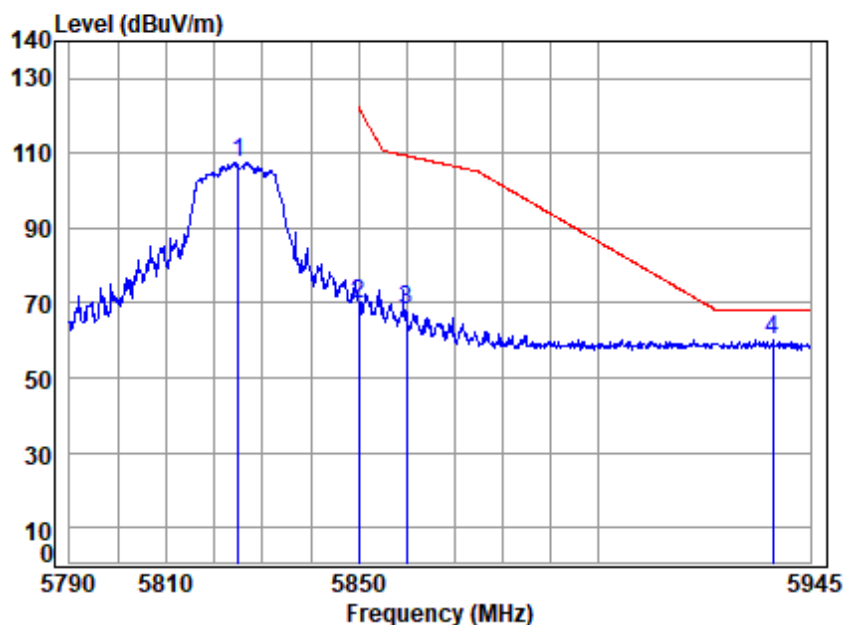

Condition: 3m VERTICAL


Job No : 04261WM

Mode : 5825 Band edge

: 5.8G Wi-Fi 11ac20

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5825.000	10.99	33.50	30.75	94.04	107.78	-----	-----	peak
2	5850.000	10.95	33.60	30.76	55.70	69.49	122.20	-52.71	peak
3	5860.000	10.94	33.58	30.76	54.61	68.37	109.40	-41.03	peak
4 pp	5936.996	10.86	33.57	30.78	46.56	60.21	68.20	-7.99	peak

11ac_VHT(40M)_TX_CH_151_Horizontal

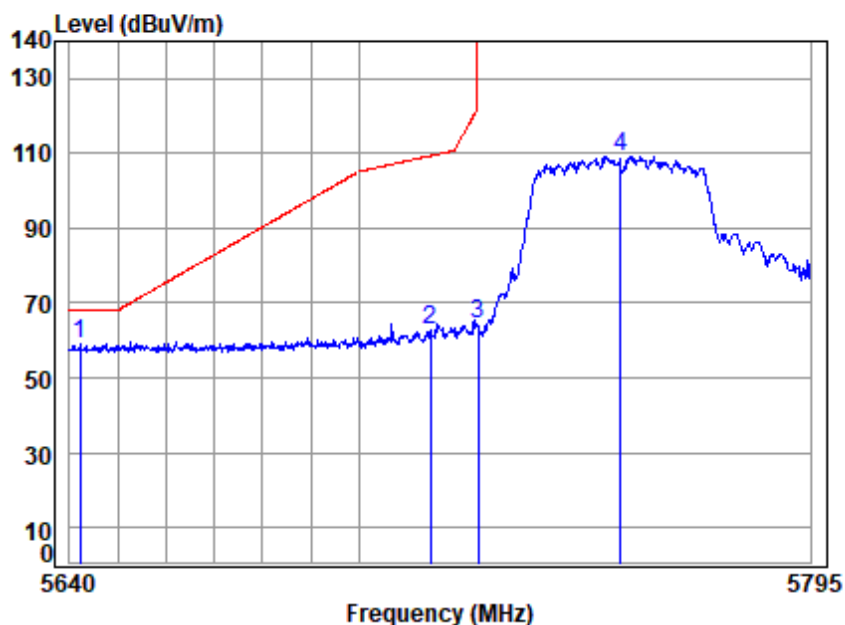

Condition: 3m HORIZONTAL


Job No : 04261WM

Mode : 5755 Band edge

: 5.8G Wi-Fi 11ac40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5642.141	10.47	33.08	30.70	46.47	59.32	68.20	-8.88 peak
2	5715.000	10.63	33.23	30.72	49.50	62.64	109.40	-46.76 peak
3	5725.000	10.68	33.25	30.72	51.30	64.51	122.20	-57.69 peak
4	5755.000	10.81	33.31	30.73	95.74	109.13	-----	----- peak

11ac_VHT(40M)_TX_CH_151_Vertical

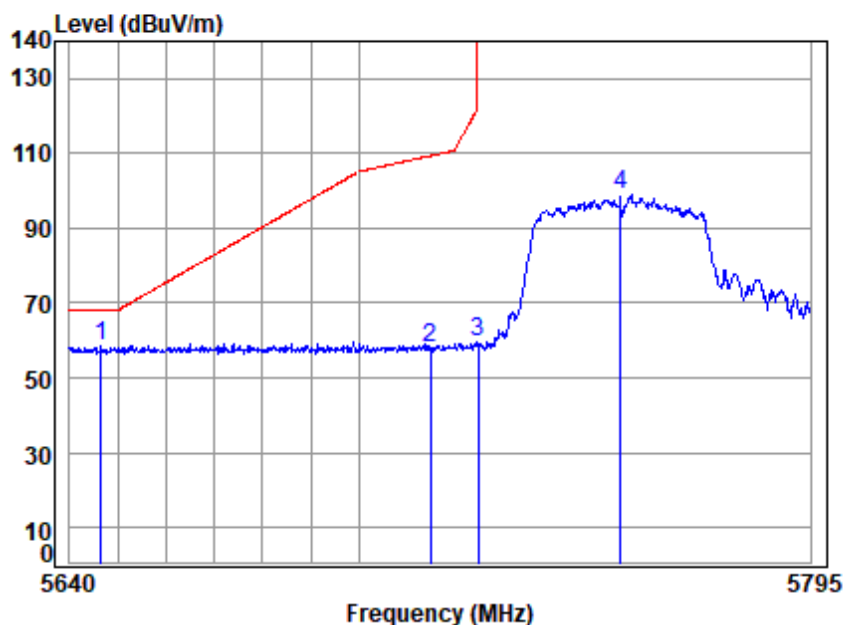

Condition: 3m VERTICAL


Job No : 04261WM

Mode : 5755 Band edge

: 5.8G Wi-Fi 11ac40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5646.426	10.48	33.09	30.70	45.95	58.82	68.20	-9.38 peak
2	5715.000	10.63	33.23	30.72	45.09	58.23	109.40	-51.17 peak
3	5725.000	10.68	33.25	30.72	46.25	59.46	122.20	-62.74 peak
4	5755.000	10.81	33.31	30.73	85.36	98.75	-----	----- peak

11ac_VHT(40M)_TX_CH_159_Horizontal

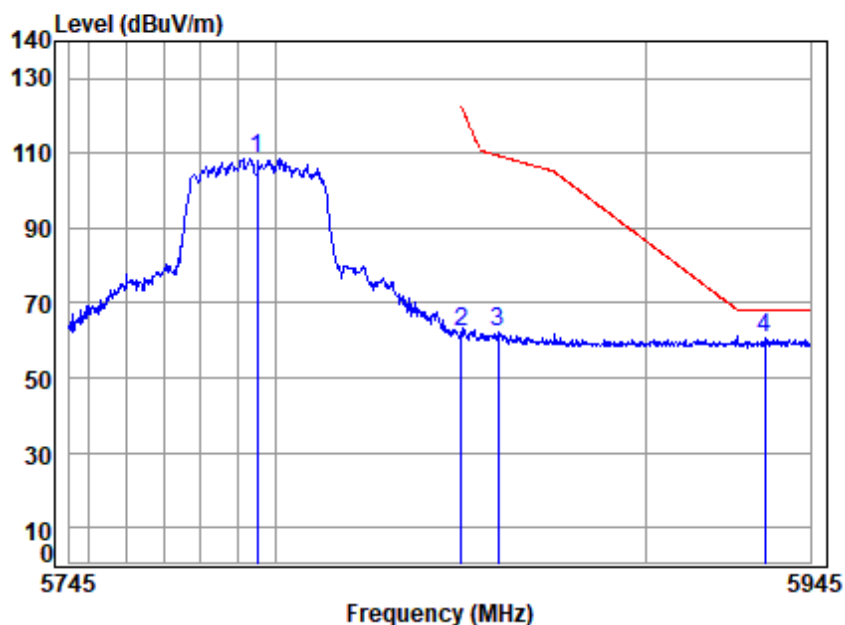

Condition: 3m HORIZONTAL


Job No : 04261WM

Mode : 5795 Band edge

: 5.8G Wi-Fi 11ac40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5795.000	11.00	33.39	30.74	95.17	108.82	-----	-----	peak
2	5850.000	10.95	33.60	30.76	48.33	62.12	122.20	-60.08	peak
3	5860.000	10.94	33.58	30.76	48.73	62.49	109.40	-46.91	peak
4 pp	5932.603	10.86	33.57	30.78	47.00	60.65	68.20	-7.55	peak

11ac_VHT(40M)_TX_CH_159_Vertical

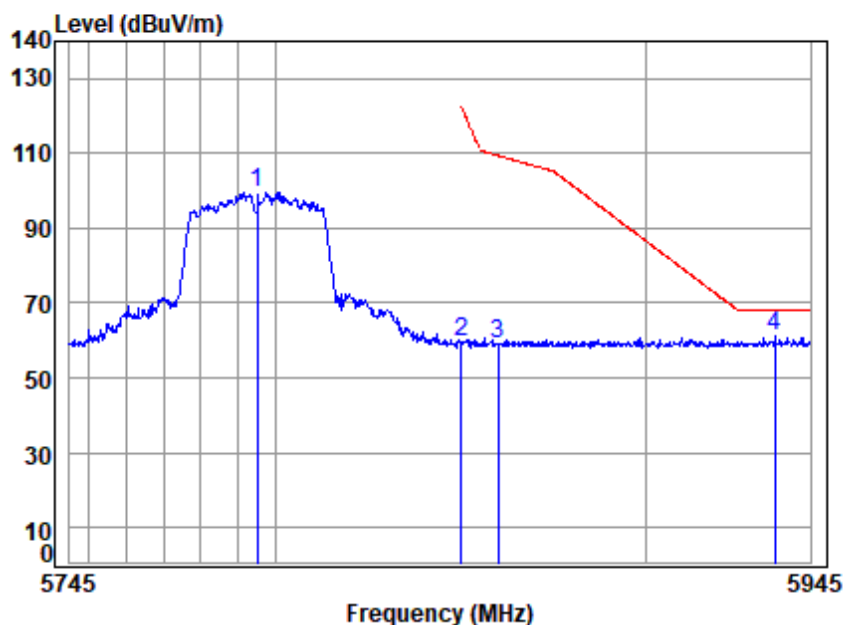

Condition: 3m VERTICAL


Job No : 04261WM

Mode : 5795 Band edge

: 5.8G Wi-Fi 11ac40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5795.000	11.00	33.39	30.74	86.15	99.80	-----	-----	peak
2	5850.000	10.95	33.60	30.76	45.63	59.42	122.20	-62.78	peak
3	5860.000	10.94	33.58	30.76	45.28	59.04	109.40	-50.36	peak
4 pp	5935.243	10.86	33.57	30.78	47.34	60.99	68.20	-7.21	peak

11ac_VHT(80M)_TX_CH_155_Horizontal

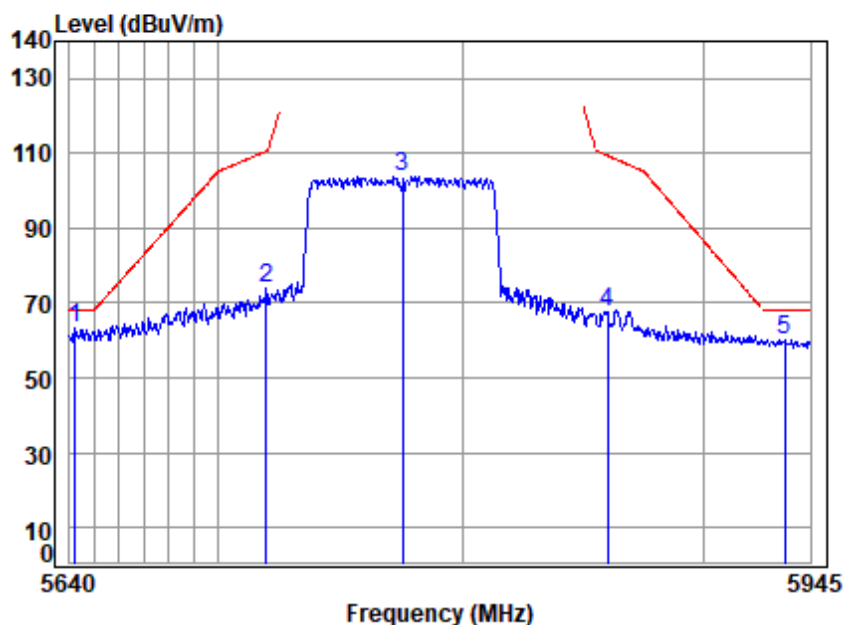

Condition: 3m HORIZONTAL

Job No : 04261WM

Mode : 5775 Band edge

: 5.8G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 5642.377	10.47	33.08	30.70	50.36	63.21	68.20	-4.99	peak
2	5719.568	10.65	33.24	30.72	61.07	74.24	110.68	-36.44	peak
3	5775.000	10.91	33.35	30.74	90.39	103.91	-----	-----	peak
4	5859.826	10.94	33.58	30.76	53.85	67.61	109.45	-41.84	peak
5	5934.364	10.86	33.57	30.78	46.67	60.32	68.20	-7.88	peak