FCC RF Test Report

APPLICANT	: Xiaomi Communications Co., Ltd.
EQUIPMENT	: Mobile Phone
BRAND NAME	: Xiaomi
MODEL NAME	: XIG04
FCC ID	: 2AFZZN60R
STANDARD	: 47 CFR Part 2, 22, 27
CLASSIFICATION	: PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S)	: Jun. 10, 2023 ~ Jun. 21, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia

ACCREDITED Cert #5145.02

Sporton International Inc. (Kunshan)
No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China

TABLE OF CONTENTS

REVISION HISTORY **3**

SUMMARY OF TEST RESULT **4**

1 GENERAL DESCRIPTION **5**

1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Product Specification of Equipment Under Test 5
1.5 Modification of EUT 6
1.6 Maximum EIRP Power and Emission Designator 6
1.7 Testing Location 6
1.8 Applicable Standards 6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST **7**

2.1 Test Mode 7
2.2 Connection Diagram of Test System 8
2.3 Support Unit used in test configuration and system 8
2.4 Measurement Results Explanation Example 8
2.5 Frequency List of Low/Middle/High Channels 9

3 CONDUCTED TEST ITEMS **10**

3.1 Measuring Instruments 10
3.2 Test Setup 10
3.3 Test Result of Conducted Test 10
3.4 Conducted Output Power and EIRP 11
3.5 Peak-to-Average Ratio 12
3.6 Occupied Bandwidth 13
3.7 Conducted Band Edge 14
3.8 Conducted Spurious Emission 15
3.9 Frequency Stability 16

4 LIST OF MEASURING EQUIPMENT **17**

5 MEASUREMENT UNCERTAINTY **18**

APPENDIX A. TEST RESULTS OF CONDUCTED TEST

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG350505-01C	Rev. 01	Initial issue of report	Jul. 04, 2023

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(h)(2)	Equivalent Isotropic Radiated Power (5G NR n41)	EIRP < 2Watt		
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§27.53(m)(4)	Conducted Band Edge Measurement (5G NR n41)	§27.53(m)(4)	PASS	-
3.8	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (5G NR n41)	< $55+10\log_{10}$(P[Watts])	PASS	-
3.9	§27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
-	§2.1051 §27.53(m)(4)	Radiated Spurious Emission (5G NR n41)	< $55+10\log_{10}$(P[Watts])	Not Performed	1

Note 1: n41 RSE data re-use parent model, and indicate in Spot Check Evaluation report.

Conformity Assessment Condition:
1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account. 2. The measurement uncertainty please refer to each test result in the section “Measurement Uncertainty”
Disclaimer:
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.
#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.
#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Xiaomi
Model Name	XIG04
FCC ID	2AFZZN60R
IMEI Code	Conducted: 866263060006282/866263060006290
HW Version	P2.0
SW Version	MIUI 14
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n41 : 2496 MHz ~ 2690 MHz
Rx Frequency	5G NR n41 : 2496 MHz ~ 2690 MHz
Bandwidth	n41 : 20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 80MHz / 90MHz / 100MHz
SCS	30kHz
Antenna Gain	<Ant. 1> -4.50 dBi <Ant. 2> -4.90 dBi <Ant. 3> -6.30 dBi <Ant. 4> -1.50 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum EIRP is calculated from max output power and max antenna gain, only the maximum EIRP of Ant.4 is shown in the report.
2. 5G NR n41 support SA mode and NSA mode. According to the maximum power between SA and NSA mode, SA covers NSA mode.
3. All the supported ENDC combinations are verified conducted power, only the ENDC combination with highest power are shown in the report.
4. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP Power and Emission Designator

5G NR n41		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
20	2506.02 ~ 2679.99	0.2113	18M2G7D	0.1774	18M2W7D
30	2511.00 ~ 2674.98	0.2075	27M8G7D	0.1774	27M9W7D
40	2516.01 ~ 2670.00	0.2065	37M8G7D	0.1738	37M9W7D
50	2521.02 ~ 2664.99	0.2065	47M4G7D	0.1758	47M5W7D
60	2526.00 ~ 2659.98	0.2070	57M7G7D	0.1734	58M0W7D
80	2536.02 ~ 2649.99	0.2148	77M6G7D	0.1762	77M6W7D
90	2541.00 ~ 2644.98	0.2123	87M5G7D	0.1738	87M6W7D
100	2546.01 ~ 2640.00	0.2275	97M4G7D	0.1888	97M6W7D

1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	**Sporton Site No.**	**FCC Designation No.**	**FCC Test Firm Registration No.**
	TH01-KS	CN1257	314309

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 27
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

Test Items	5G NR	Bandwidth (MHz)													Modulation					RB #		Test Channel		
		5	10	15	20	25	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16 QAM	64 QAM	256 QAM	1	Full	L	M	H
Max. Output Power	n41	-	-	-	v	-	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	n41	-	-	-		-					-			v	v	v				v	v		v	
26dB and 99% Bandwidth	n41	-	-	-	v	-	v	v	v	v	-	v	v	v		v	v	v	v		v		v	
Conducted Band Edge	n41	-	-	-	v	-			v		-			v	v	v				v	v	v		v
Conducted Spurious Emission	n41	-	-	-	v	-			v		-			v	v	v				v		v	v	v
Frequency Stability	n41	-	-	-	v	-					-					v					v		v	
E.R.P / E.I.R.P	n41	-	-	-	v	-	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v
Note	The mark "**v** " means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. Frequency Stability：Normal Voltage = 3.89V ；Low Voltage =3.60V.；High Voltage =4.48V All test items are based on engineering evaluation.																							

2.2 Connection Diagram of Test System

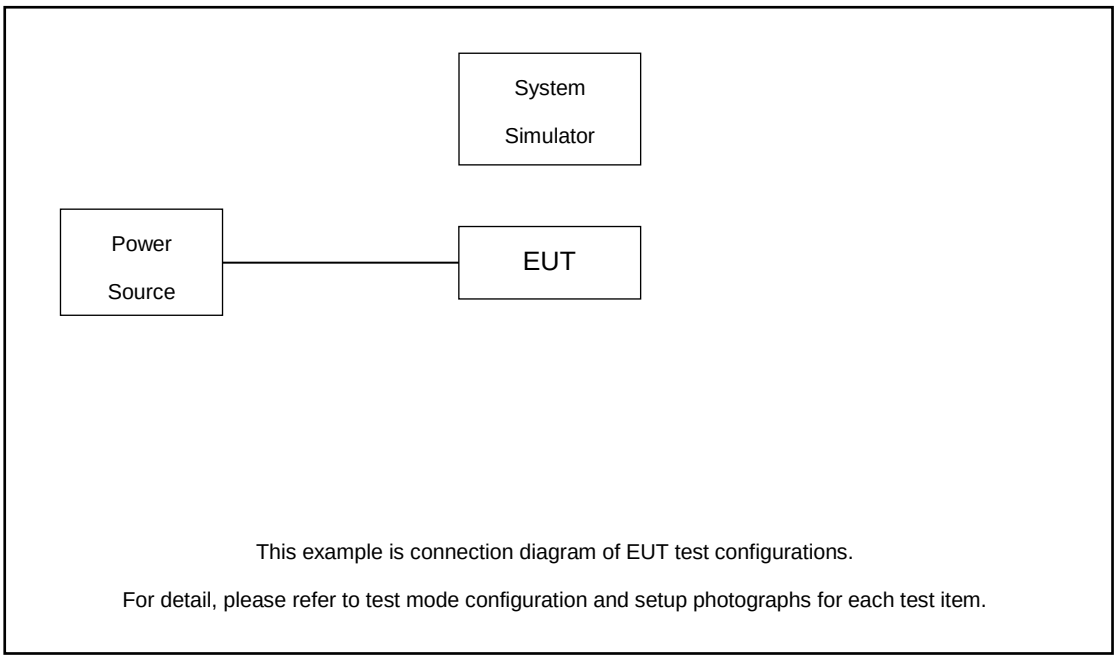

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 6.0 dB and 20dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 6.0 + 20 = 26.0 (dB)

2.5 Frequency List of Low/Middle/High Channels

5G NR n41 Channel and Frequency List				
BW [MHz]	**Channel/Frequency(MHz)**	**Lowest**	**Middle**	**Highest**
100	Channel	509202	518598	528000
	Frequency	2546.01	2592.99	2640
90	Channel	508200	518598	528996
	Frequency	2541	2592.99	2644.98
80	Channel	507204	518598	529998
	Frequency	2536.02	2592.99	2649.99
60	Channel	505200	518598	531996
	Frequency	2526	2592.99	2659.98
50	Channel	504204	518598	532998
	Frequency	2521.02	2592.99	2664.99
40	Channel	503202	518598	534000
	Frequency	2516.01	2592.99	2670
30	Channel	502200	518598	534996
	Frequency	2511	2592.99	2674.98
20	Channel	501204	518598	535998
	Frequency	2506.02	2592.99	2679.99

3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power

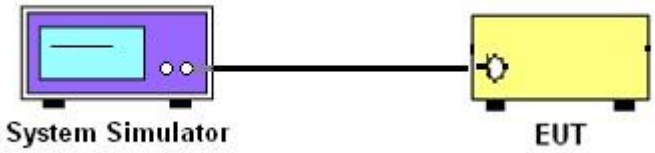

3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

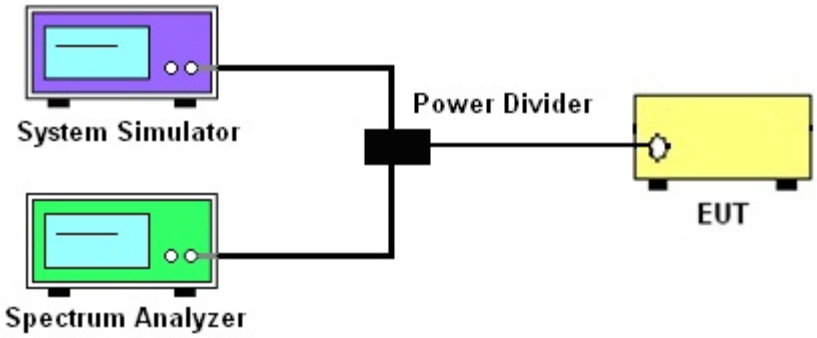

3.2.3 Frequency Stability

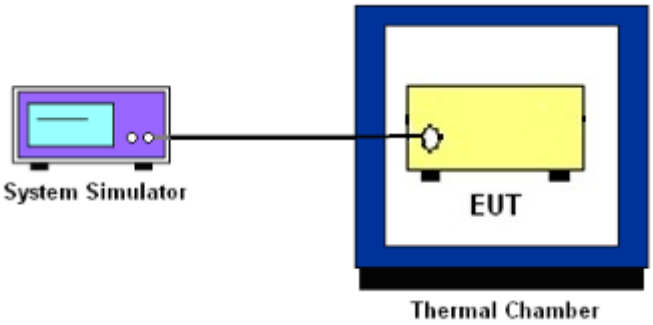

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and EIRP

3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n41.

According to KDB 412172 D01 Power Approach,

EIRP = $P_T + G_T – L_C$, ERP = EIRP -2.15, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace. (this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “–X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW >= 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used (generally limited to no less than 1% of the OBW) and the measured power was integrated over the full required measurement bandwidth.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.
   Example:
   The limit line is derived from 43 + 10log(P)dB below the transmitter power P(Watts)
   = P(W)- [43 + 10log(P)] (dB)
   = [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB) = -13dBm.
9. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

For 5G NR n41:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 55 + 10 log (P) dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. For 5G NR n41

    The limit line is derived from 55 + 10log(P)dB below the transmitter power P(Watts)

    = P(W)- [55+ 10log(P)] (dB)

    = [30+ 10log(P)] (dBm) - [55+ 10log(P)] (dB)

    = -25dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Jun. 10, 2023~ Jun. 21, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	Aug. 26, 2022	Jun. 10, 2023~ Jun. 21, 2023	Aug. 25, 2023	Conducted (TH01-KS)
Temperature &humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 15, 2022	Jun. 10, 2023~ Jun. 21, 2023	Jul. 14, 2023	Conducted (TH01-KS)

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	**±0.46 dB**
Conducted Emissions	**±0.48 dB**
Occupied Channel Bandwidth	**±0.1 %**

---------- THE END ----------

Appendix A. Test Results of Conducted Test

Test Engineer :	Smile Wang	**Temperature :**	22~23℃
		Relative Humidity :	40~42%

Software Version: 23.04.1201

FR1 N41(Ant4)

Transmitter Conducted Output Power And EIRP, (G_T - L_C)=-1.5dBi

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
41	30	20	501204	2506.02	DFT-s-OFDM PI/2 BPSK	1@1	24.74	23.24	0.2109
41	30	20	501204	2506.02	DFT-s-OFDM QPSK	1@1	24.7	23.2	0.2089
41	30	20	501204	2506.02	DFT-s-OFDM 16 QAM	1@1	23.95	22.45	0.1758
41	30	20	518598	2592.99	DFT-s-OFDM PI/2 BPSK	1@1	24.48	22.98	0.1986
41	30	20	518598	2592.99	DFT-s-OFDM QPSK	1@1	24.51	23.01	0.2000
41	30	20	518598	2592.99	DFT-s-OFDM 16 QAM	1@1	23.71	22.21	0.1663
41	30	20	535998	2679.99	DFT-s-OFDM PI/2 BPSK	1@1	24.75	23.25	0.2113
41	30	20	535998	2679.99	DFT-s-OFDM QPSK	1@1	24.67	23.17	0.2075
41	30	20	535998	2679.99	DFT-s-OFDM 16 QAM	1@1	23.99	22.49	0.1774
41	30	30	502200	2511	DFT-s-OFDM PI/2 BPSK	1@1	24.66	23.16	0.2070
41	30	30	502200	2511	DFT-s-OFDM QPSK	1@1	24.67	23.17	0.2075
41	30	30	502200	2511	DFT-s-OFDM 16 QAM	1@1	23.99	22.49	0.1774
41	30	30	518598	2592.99	DFT-s-OFDM PI/2 BPSK	1@1	24.55	23.05	0.2018
41	30	30	518598	2592.99	DFT-s-OFDM QPSK	1@1	24.58	23.08	0.2032
41	30	30	518598	2592.99	DFT-s-OFDM 16 QAM	1@1	23.67	22.17	0.1648
41	30	30	534996	2674.98	DFT-s-OFDM PI/2 BPSK	1@1	24.63	23.13	0.2056
41	30	30	534996	2674.98	DFT-s-OFDM QPSK	1@1	24.6	23.1	0.2042
41	30	30	534996	2674.98	DFT-s-OFDM 16 QAM	1@1	23.9	22.4	0.1738
41	30	40	503202	2516.01	DFT-s-OFDM PI/2 BPSK	1@1	24.61	23.11	0.2046
41	30	40	503202	2516.01	DFT-s-OFDM QPSK	1@1	24.65	23.15	0.2065
41	30	40	503202	2516.01	DFT-s-OFDM 16 QAM	1@1	23.9	22.4	0.1738
41	30	40	518598	2592.99	DFT-s-OFDM PI/2 BPSK	1@1	24.52	23.02	0.2004
41	30	40	518598	2592.99	DFT-s-OFDM QPSK	1@1	24.51	23.01	0.2000
41	30	40	518598	2592.99	DFT-s-OFDM 16 QAM	1@1	23.69	22.19	0.1656
41	30	40	534000	2670	DFT-s-OFDM PI/2 BPSK	1@1	24.65	23.15	0.2065
41	30	40	534000	2670	DFT-s-OFDM QPSK	1@1	24.64	23.14	0.2061
41	30	40	534000	2670	DFT-s-OFDM 16 QAM	1@1	23.88	22.38	0.1730
41	30	50	504204	2521.02	DFT-s-OFDM PI/2 BPSK	1@1	24.65	23.15	0.2065
41	30	50	504204	2521.02	DFT-s-OFDM QPSK	1@1	24.64	23.14	0.2061
41	30	50	504204	2521.02	DFT-s-OFDM 16 QAM	1@1	23.95	22.45	0.1758
41	30	50	518598	2592.99	DFT-s-OFDM PI/2 BPSK	1@1	24.56	23.06	0.2023
41	30	50	518598	2592.99	DFT-s-OFDM QPSK	1@1	24.52	23.02	0.2004
41	30	50	518598	2592.99	DFT-s-OFDM 16 QAM	1@1	23.67	22.17	0.1648
41	30	50	532998	2664.99	DFT-s-OFDM PI/2 BPSK	1@1	24.53	23.03	0.2009
41	30	50	532998	2664.99	DFT-s-OFDM QPSK	1@1	24.63	23.13	0.2056
41	30	50	532998	2664.99	DFT-s-OFDM 16 QAM	1@1	23.86	22.36	0.1722

41	30	60	505200	2526	DFT-s-OFDM PI/2 BPSK	1@1	24.66	23.16	0.2070
41	30	60	505200	2526	DFT-s-OFDM QPSK	1@1	24.65	23.15	0.2065
41	30	60	505200	2526	DFT-s-OFDM 16 QAM	1@1	23.89	22.39	0.1734
41	30	60	518598	2592.99	DFT-s-OFDM PI/2 BPSK	1@1	24.47	22.97	0.1982
41	30	60	518598	2592.99	DFT-s-OFDM QPSK	1@1	24.47	22.97	0.1982
41	30	60	518598	2592.99	DFT-s-OFDM 16 QAM	1@1	23.6	22.1	0.1622
41	30	60	531996	2659.98	DFT-s-OFDM PI/2 BPSK	1@1	24.45	22.95	0.1972
41	30	60	531996	2659.98	DFT-s-OFDM QPSK	1@1	24.46	22.96	0.1977
41	30	60	531996	2659.98	DFT-s-OFDM 16 QAM	1@1	23.64	22.14	0.1637
41	30	80	507204	2536.02	DFT-s-OFDM PI/2 BPSK	1@1	24.75	23.25	0.2113
41	30	80	507204	2536.02	DFT-s-OFDM QPSK	1@1	24.82	23.32	0.2148
41	30	80	507204	2536.02	DFT-s-OFDM 16 QAM	1@1	23.96	22.46	0.1762
41	30	80	518598	2592.99	DFT-s-OFDM PI/2 BPSK	1@1	24.44	22.94	0.1968
41	30	80	518598	2592.99	DFT-s-OFDM QPSK	1@1	24.49	22.99	0.1991
41	30	80	518598	2592.99	DFT-s-OFDM 16 QAM	1@1	23.79	22.29	0.1694
41	30	80	529998	2649.99	DFT-s-OFDM PI/2 BPSK	1@1	24.43	22.93	0.1963
41	30	80	529998	2649.99	DFT-s-OFDM QPSK	1@1	24.59	23.09	0.2037
41	30	80	529998	2649.99	DFT-s-OFDM 16 QAM	1@1	23.64	22.14	0.1637
41	30	90	508200	2541	DFT-s-OFDM PI/2 BPSK	1@1	24.76	23.26	0.2118
41	30	90	508200	2541	DFT-s-OFDM QPSK	1@1	24.77	23.27	0.2123
41	30	90	508200	2541	DFT-s-OFDM 16 QAM	1@1	23.9	22.4	0.1738
41	30	90	518598	2592.99	DFT-s-OFDM PI/2 BPSK	1@1	24.41	22.91	0.1954
41	30	90	518598	2592.99	DFT-s-OFDM QPSK	1@1	24.44	22.94	0.1968
41	30	90	518598	2592.99	DFT-s-OFDM 16 QAM	1@1	23.67	22.17	0.1648
41	30	90	528996	2644.98	DFT-s-OFDM PI/2 BPSK	1@1	24.38	22.88	0.1941
41	30	90	528996	2644.98	DFT-s-OFDM QPSK	1@1	24.4	22.9	0.1950
41	30	90	528996	2644.98	DFT-s-OFDM 16 QAM	1@1	23.64	22.14	0.1637
41	30	100	509202	2546.01	DFT-s-OFDM PI/2 BPSK	135@67	24.64	23.14	0.2061
41	30	100	509202	2546.01	DFT-s-OFDM PI/2 BPSK	1@1	24.73	23.23	0.2104
41	30	100	509202	2546.01	DFT-s-OFDM PI/2 BPSK	1@271	24.61	23.11	0.2046
41	30	100	509202	2546.01	DFT-s-OFDM QPSK	135@67	24.67	23.17	0.2075
41	30	100	509202	2546.01	DFT-s-OFDM QPSK	1@1	24.8	23.3	0.2138
41	30	100	509202	2546.01	DFT-s-OFDM QPSK	1@271	24.61	23.11	0.2046
41	30	100	509202	2546.01	DFT-s-OFDM 16 QAM	135@67	23.88	22.38	0.1730
41	30	100	509202	2546.01	DFT-s-OFDM 16 QAM	1@1	24.03	22.53	0.1791
41	30	100	509202	2546.01	DFT-s-OFDM 16 QAM	1@271	23.31	21.81	0.1517
41	30	100	509202	2546.01	DFT-s-OFDM 64 QAM	135@67	22.36	20.86	0.1219
41	30	100	509202	2546.01	DFT-s-OFDM 64 QAM	1@1	22.62	21.12	0.1294
41	30	100	509202	2546.01	DFT-s-OFDM 64 QAM	1@271	22.42	20.92	0.1236
41	30	100	509202	2546.01	DFT-s-OFDM 256 QAM	135@67	20.38	18.88	0.0773
41	30	100	509202	2546.01	DFT-s-OFDM 256 QAM	1@1	20.61	19.11	0.0815
41	30	100	509202	2546.01	DFT-s-OFDM 256 QAM	1@271	20.43	18.93	0.0782
41	30	100	509202	2546.01	CP-OFDM QPSK	137@68	23.31	21.81	0.1517
41	30	100	509202	2546.01	CP-OFDM QPSK	1@1	23.49	21.99	0.1581

41	30	100	509202	2546.01	CP-OFDM QPSK	1@271	23.13	21.63	0.1455
41	30	100	518598	2592.99	DFT-s-OFDM PI/2 BPSK	135@67	24.63	23.13	0.2056
41	30	100	518598	2592.99	DFT-s-OFDM PI/2 BPSK	1@1	24.9	23.4	0.2188
41	30	100	518598	2592.99	DFT-s-OFDM PI/2 BPSK	1@271	24.84	23.34	0.2158
41	30	100	518598	2592.99	DFT-s-OFDM QPSK	135@67	24.66	23.57	0.2275
41	30	100	518598	2592.99	DFT-s-OFDM QPSK	1@1	24.65	23.15	0.2065
41	30	100	518598	2592.99	DFT-s-OFDM QPSK	1@271	24.62	23.12	0.2051
41	30	100	518598	2592.99	DFT-s-OFDM 16 QAM	135@67	23.7	22.2	0.1660
41	30	100	518598	2592.99	DFT-s-OFDM 16 QAM	1@1	23.8	22.3	0.1698
41	30	100	518598	2592.99	DFT-s-OFDM 16 QAM	1@271	24.07	22.57	0.1807
41	30	100	518598	2592.99	DFT-s-OFDM 64 QAM	135@67	21.81	20.31	0.1074
41	30	100	518598	2592.99	DFT-s-OFDM 64 QAM	1@1	22.41	20.91	0.1233
41	30	100	518598	2592.99	DFT-s-OFDM 64 QAM	1@271	22.79	21.29	0.1346
41	30	100	518598	2592.99	DFT-s-OFDM 256 QAM	135@67	20.2	18.7	0.0741
41	30	100	518598	2592.99	DFT-s-OFDM 256 QAM	1@1	20.39	18.89	0.0774
41	30	100	518598	2592.99	DFT-s-OFDM 256 QAM	1@271	20.75	19.25	0.0841
41	30	100	518598	2592.99	CP-OFDM QPSK	137@68	23.18	21.68	0.1472
41	30	100	518598	2592.99	CP-OFDM QPSK	1@1	23.16	21.66	0.1466
41	30	100	518598	2592.99	CP-OFDM QPSK	1@271	23.7	22.2	0.1660
41	30	100	528000	2640	DFT-s-OFDM PI/2 BPSK	135@67	24.74	23.24	0.2109
41	30	100	528000	2640	DFT-s-OFDM PI/2 BPSK	1@1	24.82	23.32	0.2148
41	30	100	528000	2640	DFT-s-OFDM PI/2 BPSK	1@271	24.76	23.26	0.2118
41	30	100	528000	2640	DFT-s-OFDM QPSK	135@67	24.74	23.57	0.2275
41	30	100	528000	2640	DFT-s-OFDM QPSK	1@1	24.38	22.88	0.1941
41	30	100	528000	2640	DFT-s-OFDM QPSK	1@271	24.72	23.22	0.2099
41	30	100	528000	2640	DFT-s-OFDM 16 QAM	135@67	24.03	22.53	0.1791
41	30	100	528000	2640	DFT-s-OFDM 16 QAM	1@1	23.61	22.11	0.1626
41	30	100	528000	2640	DFT-s-OFDM 16 QAM	1@271	24.26	22.76	0.1888
41	30	100	528000	2640	DFT-s-OFDM 64 QAM	135@67	22.51	21.01	0.1262
41	30	100	528000	2640	DFT-s-OFDM 64 QAM	1@1	21.74	20.24	0.1057
41	30	100	528000	2640	DFT-s-OFDM 64 QAM	1@271	22.51	21.01	0.1262
41	30	100	528000	2640	DFT-s-OFDM 256 QAM	135@67	20.48	18.98	0.0791
41	30	100	528000	2640	DFT-s-OFDM 256 QAM	1@1	20.1	18.6	0.0724
41	30	100	528000	2640	DFT-s-OFDM 256 QAM	1@271	21.02	19.52	0.0895
41	30	100	528000	2640	CP-OFDM QPSK	137@68	23.41	21.91	0.1552
41	30	100	528000	2640	CP-OFDM QPSK	1@1	22.94	21.44	0.1393
41	30	100	528000	2640	CP-OFDM QPSK	1@271	23.88	22.38	0.1730

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
41	30	20	518598	2592.99	DFT-s-OFDM QPSK	24@0	-0.0014	**PASS**	NV
41	30	20	518598	2592.99	DFT-s-OFDM QPSK	24@0	0.0035	**PASS**	LV
41	30	20	518598	2592.99	DFT-s-OFDM QPSK	24@0	-0.0028	**PASS**	HV
41	30	20	518598	2592.99	DFT-s-OFDM QPSK	24@0	0.0025	**PASS**	-30℃
41	30	20	518598	2592.99	DFT-s-OFDM QPSK	24@0	0.0019	**PASS**	-20℃
41	30	20	518598	2592.99	DFT-s-OFDM QPSK	24@0	0.0018	**PASS**	-10℃
41	30	20	518598	2592.99	DFT-s-OFDM QPSK	24@0	0.0031	**PASS**	0℃
41	30	20	518598	2592.99	DFT-s-OFDM QPSK	24@0	-0.0012	**PASS**	10℃
41	30	20	518598	2592.99	DFT-s-OFDM QPSK	24@0	0.0021	**PASS**	20℃
41	30	20	518598	2592.99	DFT-s-OFDM QPSK	24@0	0.0018	**PASS**	30℃
41	30	20	518598	2592.99	DFT-s-OFDM QPSK	24@0	-0.0033	**PASS**	40℃
41	30	20	518598	2592.99	DFT-s-OFDM QPSK	24@0	0.0022	**PASS**	50℃

Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
41	30	100	518598	2592.99	DFT-s-OFDM PI/2 BPSK	270@0	10.2	13	**PASS**
41	30	100	518598	2592.99	DFT-s-OFDM PI/2 BPSK	1@0	7.79	13	**PASS**
41	30	100	518598	2592.99	DFT-s-OFDM QPSK	270@0	10.73	13	**PASS**
41	30	100	518598	2592.99	DFT-s-OFDM QPSK	1@0	8.51	13	**PASS**

N41(100M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

N41(100M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

N41(100M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

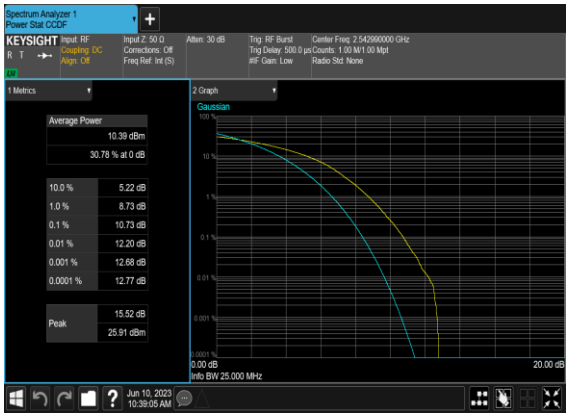

N41(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

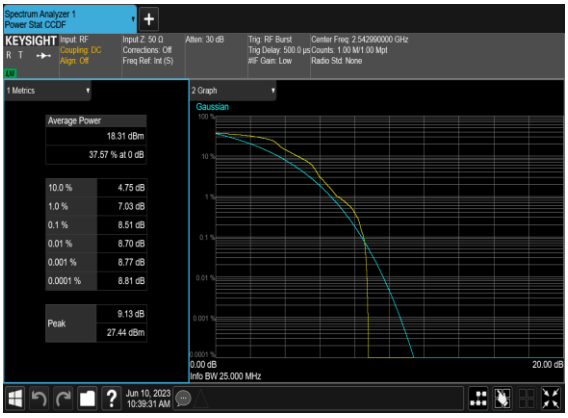

Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
41	30	20	518598	2592.99	CP-OFDM QPSK	51@0	18.173	19.01
41	30	20	518598	2592.99	CP-OFDM 16 QAM	51@0	18.214	19.09
41	30	20	518598	2592.99	CP-OFDM 64 QAM	51@0	18.154	18.98
41	30	20	518598	2592.99	CP-OFDM 256 QAM	51@0	18.122	19.01
41	30	30	518598	2592.99	CP-OFDM QPSK	78@0	27.805	28.89
41	30	30	518598	2592.99	CP-OFDM 16 QAM	78@0	27.818	28.97
41	30	30	518598	2592.99	CP-OFDM 64 QAM	78@0	27.77	28.87
41	30	30	518598	2592.99	CP-OFDM 256 QAM	78@0	27.865	28.85
41	30	40	518598	2592.99	CP-OFDM QPSK	106@0	37.799	39.25
41	30	40	518598	2592.99	CP-OFDM 16 QAM	106@0	37.878	39.06
41	30	40	518598	2592.99	CP-OFDM 64 QAM	106@0	37.829	39.26
41	30	40	518598	2592.99	CP-OFDM 256 QAM	106@0	37.782	39.38
41	30	50	518598	2592.99	CP-OFDM QPSK	133@0	47.401	49.0
41	30	50	518598	2592.99	CP-OFDM 16 QAM	133@0	47.334	48.96
41	30	50	518598	2592.99	CP-OFDM 64 QAM	133@0	47.527	49.17
41	30	50	518598	2592.99	CP-OFDM 256 QAM	133@0	47.429	49.27
41	30	60	518598	2592.99	CP-OFDM QPSK	162@0	57.732	59.62
41	30	60	518598	2592.99	CP-OFDM 16 QAM	162@0	57.81	59.85
41	30	60	518598	2592.99	CP-OFDM 64 QAM	162@0	57.962	59.77
41	30	60	518598	2592.99	CP-OFDM 256 QAM	162@0	57.773	59.7
41	30	80	518598	2592.99	CP-OFDM QPSK	217@0	77.616	79.91
41	30	80	518598	2592.99	CP-OFDM 16 QAM	217@0	77.58	79.98
41	30	80	518598	2592.99	CP-OFDM 64 QAM	217@0	77.559	79.87
41	30	80	518598	2592.99	CP-OFDM 256 QAM	217@0	77.517	81.29
41	30	90	518598	2592.99	CP-OFDM QPSK	245@0	87.495	90.19
41	30	90	518598	2592.99	CP-OFDM 16 QAM	245@0	87.381	90.28

41	30	90	518598	2592.99	CP-OFDM 64 QAM	245@0	87.584	90.13
41	30	90	518598	2592.99	CP-OFDM 256 QAM	245@0	87.556	90.23
41	30	100	518598	2592.99	CP-OFDM QPSK	273@0	97.382	100.4
41	30	100	518598	2592.99	CP-OFDM 16 QAM	273@0	97.387	100.5
41	30	100	518598	2592.99	CP-OFDM 64 QAM	273@0	97.507	100.6
41	30	100	518598	2592.99	CP-OFDM 256 QAM	273@0	97.592	100.5

N41(20M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

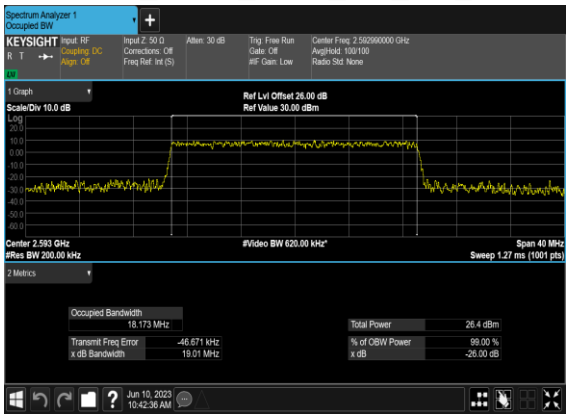

N41(20M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

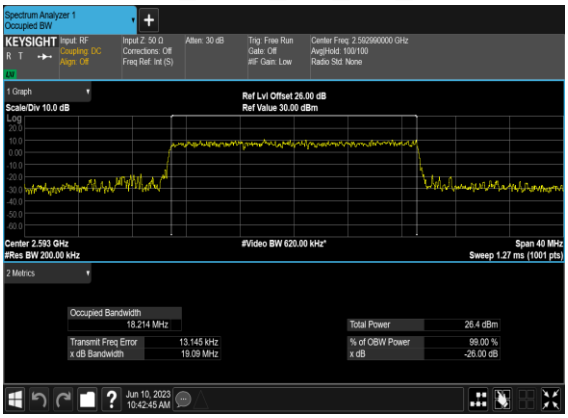

N41(20M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

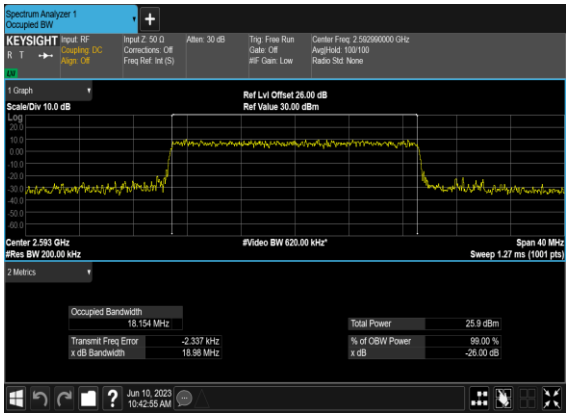

N41(20M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

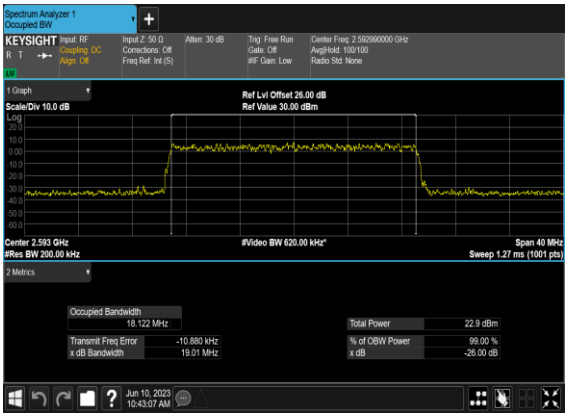

N41(30M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

N41(30M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

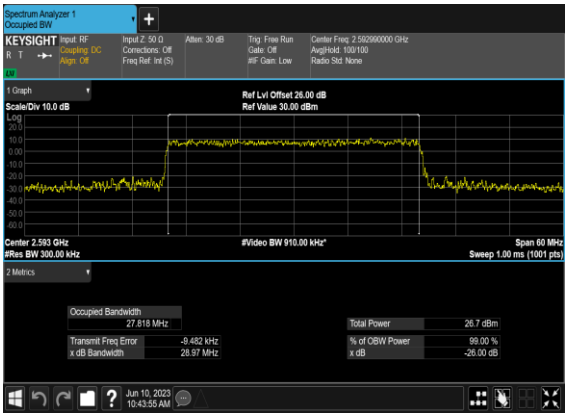

N41(30M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

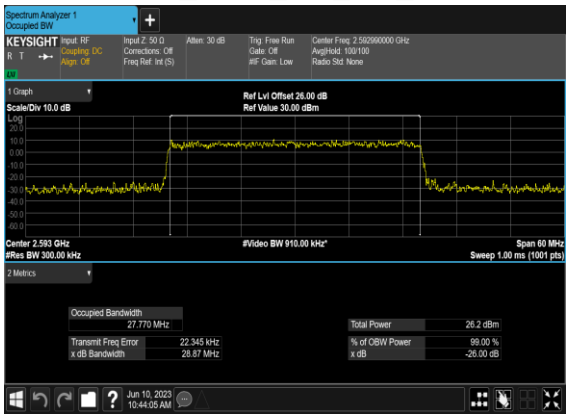

N41(30M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

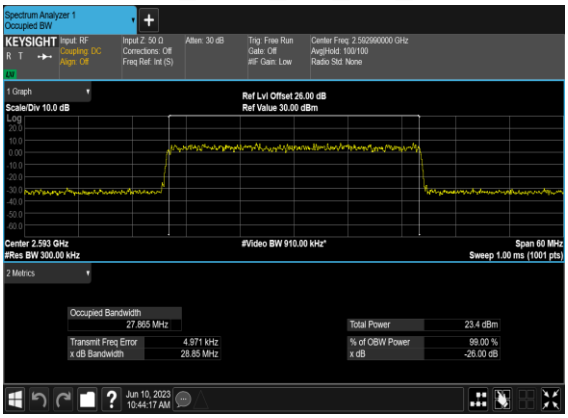

N41(40M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

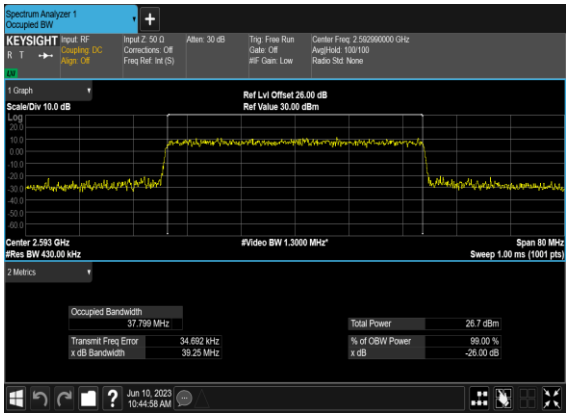

N41(40M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

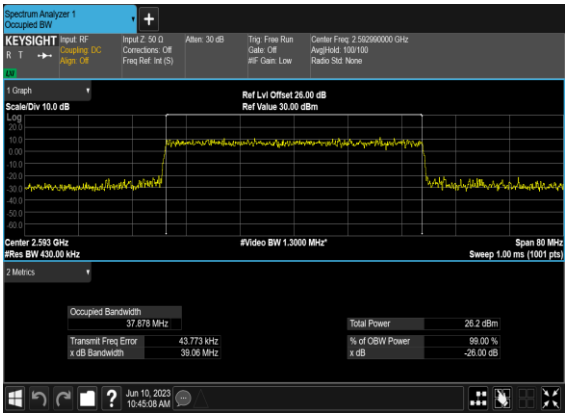

N41(40M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

N41(40M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

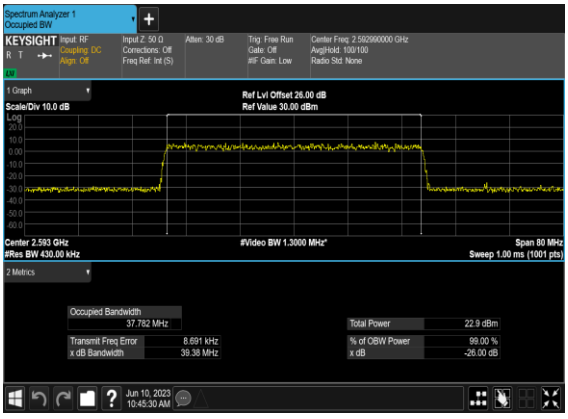

N41(50M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

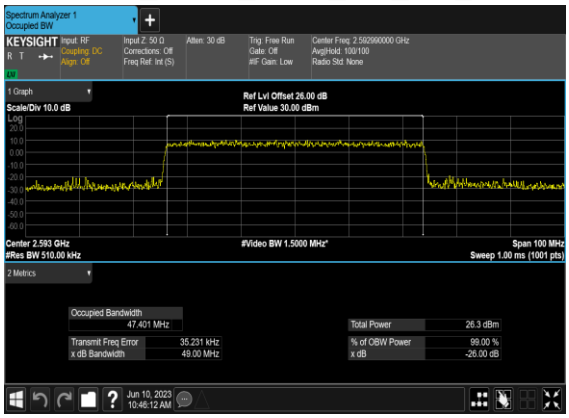

N41(50M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

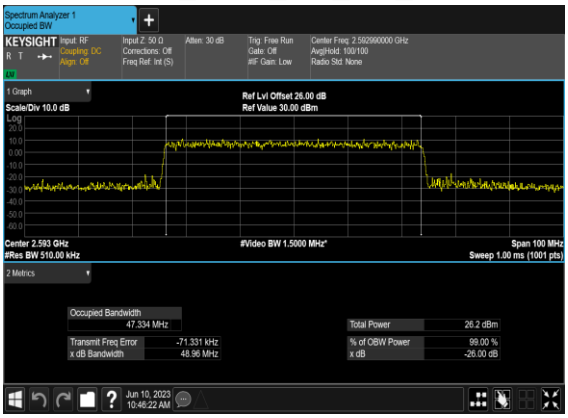

N41(50M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

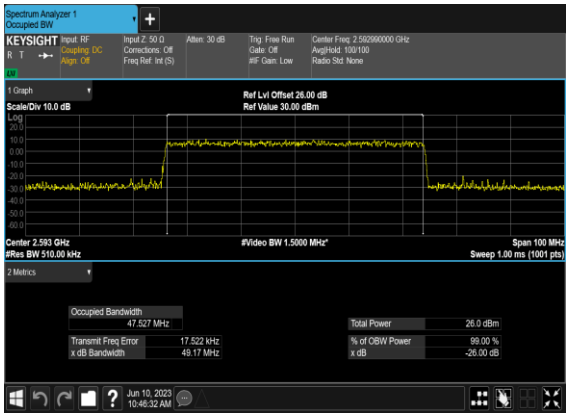

N41(50M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

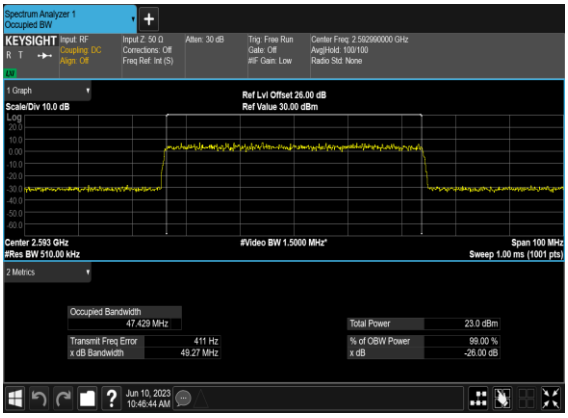

N41(60M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

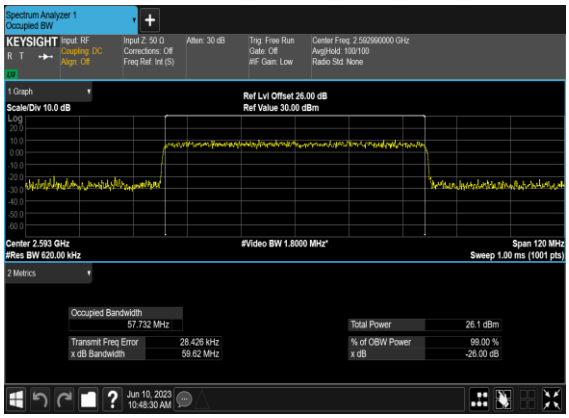

N41(60M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

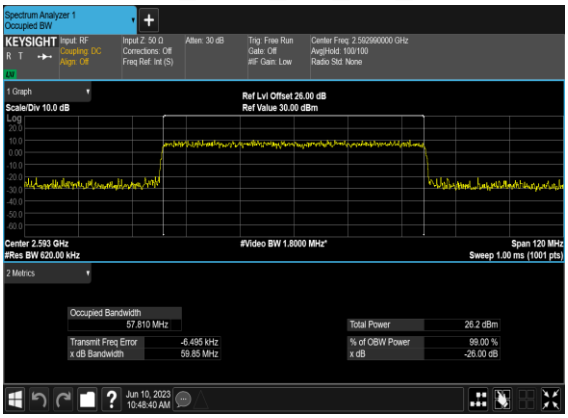

N41(60M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

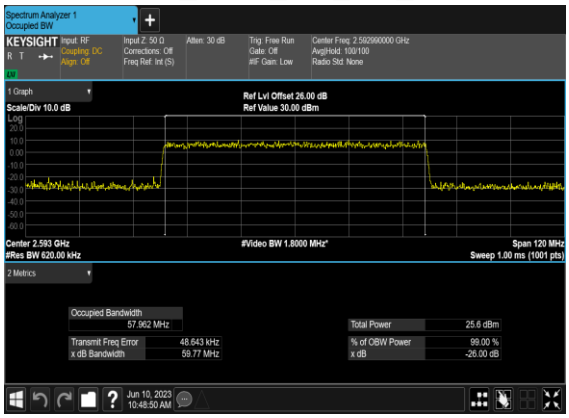

N41(60M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

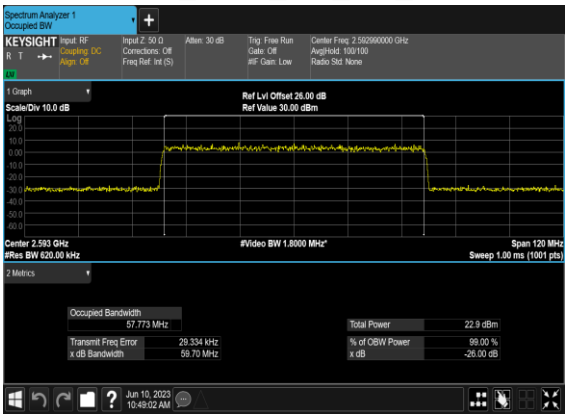

N41(80M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

N41(80M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

N41(80M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

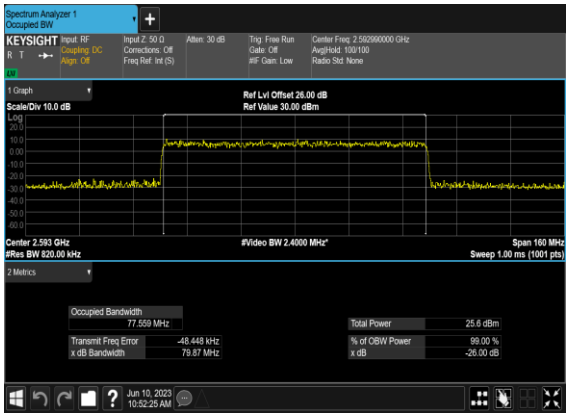

N41(80M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

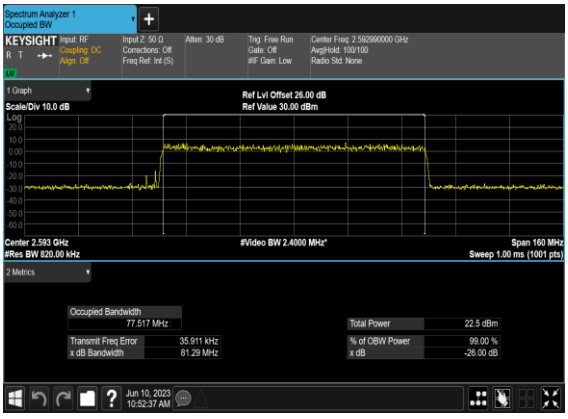

N41(90M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

N41(90M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

N41(90M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

N41(90M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

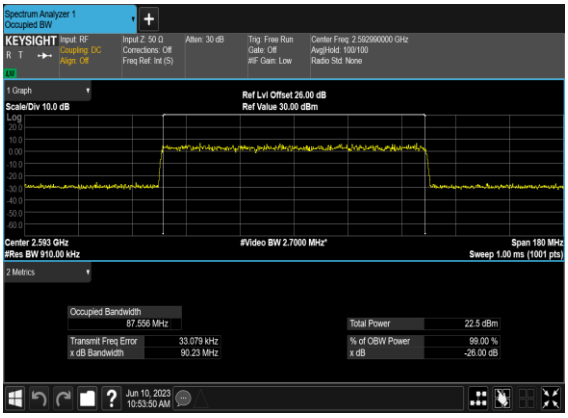

N41(100M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

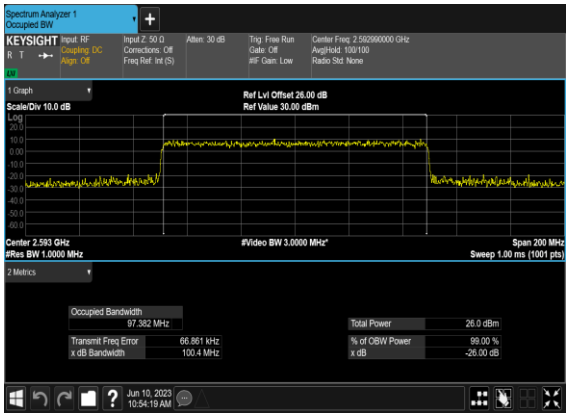

N41(100M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

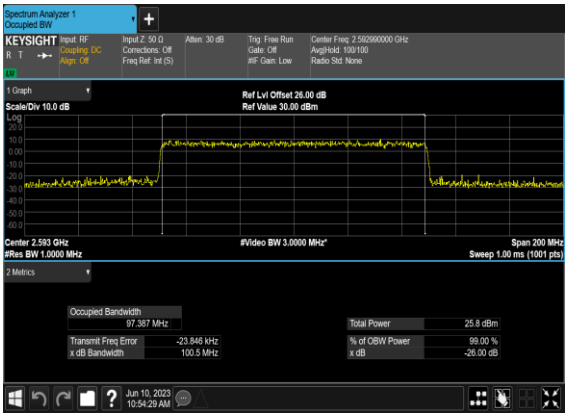

N41(100M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

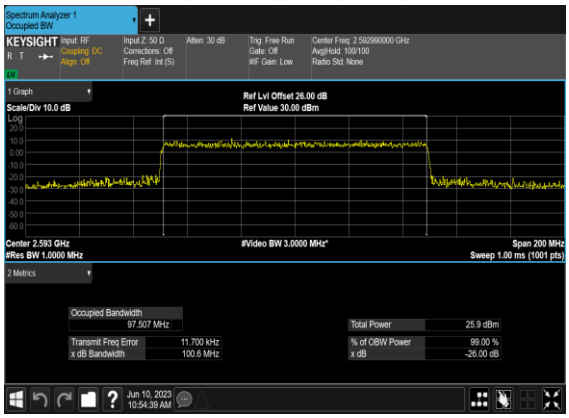

N41(100M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

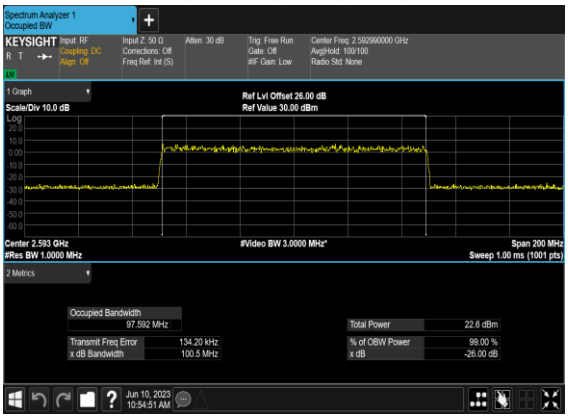

Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
41	30	20	501204	2506.02	DFT-s-OFDM BPSK	1@0	see graph	**---**
41	30	20	501204	2506.02	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
41	30	20	501204	2506.02	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
41	30	20	501204	2506.02	DFT-s-OFDM QPSK	1@0	see graph	**---**
41	30	20	501204	2506.02	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
41	30	20	501204	2506.02	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
41	30	20	518598	2592.99	DFT-s-OFDM BPSK	1@0	see graph	**---**
41	30	20	518598	2592.99	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
41	30	20	518598	2592.99	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
41	30	20	518598	2592.99	DFT-s-OFDM QPSK	1@0	see graph	**---**
41	30	20	518598	2592.99	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
41	30	20	518598	2592.99	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
41	30	20	535998	2679.99	DFT-s-OFDM BPSK	1@0	see graph	**---**
41	30	20	535998	2679.99	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
41	30	20	535998	2679.99	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
41	30	20	535998	2679.99	DFT-s-OFDM QPSK	1@0	see graph	**---**
41	30	20	535998	2679.99	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
41	30	20	535998	2679.99	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
41	30	50	504204	2521.02	DFT-s-OFDM BPSK	1@0	see graph	**---**
41	30	50	504204	2521.02	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
41	30	50	504204	2521.02	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
41	30	50	504204	2521.02	DFT-s-OFDM QPSK	1@0	see graph	**---**
41	30	50	504204	2521.02	DFT-s-OFDM QPSK	1@0	see graph	**PASS**

41	30	50	504204	2521.02	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
41	30	50	518598	2592.99	DFT-s-OFDM BPSK	1@0	see graph	**---**
41	30	50	518598	2592.99	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
41	30	50	518598	2592.99	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
41	30	50	518598	2592.99	DFT-s-OFDM QPSK	1@0	see graph	**---**
41	30	50	518598	2592.99	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
41	30	50	518598	2592.99	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
41	30	50	532998	2664.99	DFT-s-OFDM BPSK	1@0	see graph	**---**
41	30	50	532998	2664.99	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
41	30	50	532998	2664.99	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
41	30	50	532998	2664.99	DFT-s-OFDM QPSK	1@0	see graph	**---**
41	30	50	532998	2664.99	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
41	30	50	532998	2664.99	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
41	30	100	509202	2546.01	DFT-s-OFDM BPSK	1@0	see graph	**---**
41	30	100	509202	2546.01	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
41	30	100	509202	2546.01	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
41	30	100	509202	2546.01	DFT-s-OFDM QPSK	1@0	see graph	**---**
41	30	100	509202	2546.01	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
41	30	100	509202	2546.01	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
41	30	100	518598	2592.99	DFT-s-OFDM BPSK	1@0	see graph	**---**
41	30	100	518598	2592.99	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
41	30	100	518598	2592.99	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
41	30	100	518598	2592.99	DFT-s-OFDM QPSK	1@0	see graph	**---**
41	30	100	518598	2592.99	DFT-s-OFDM QPSK	1@0	see graph	**PASS**

41	30	100	518598	2592.99	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
41	30	100	528000	2640.0	DFT-s-OFDM BPSK	1@0	see graph	**---**
41	30	100	528000	2640.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
41	30	100	528000	2640.0	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
41	30	100	528000	2640.0	DFT-s-OFDM QPSK	1@0	see graph	**---**
41	30	100	528000	2640.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
41	30	100	528000	2640.0	DFT-s-OFDM QPSK	1@0	see graph	**PASS**

N41(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

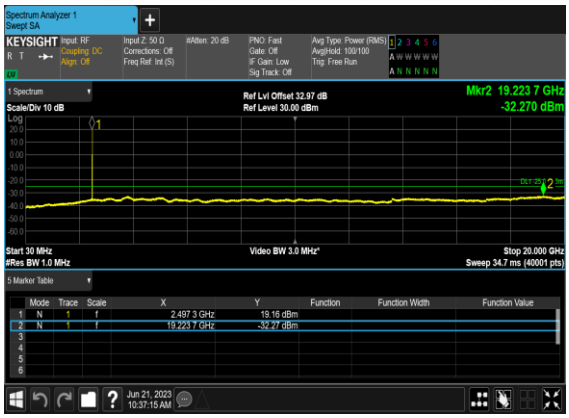

N41(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

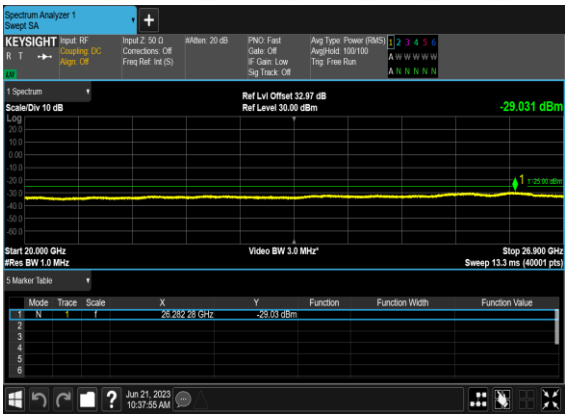

N41(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

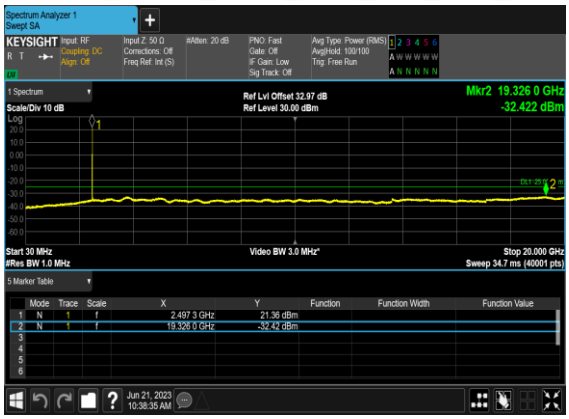

N41(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

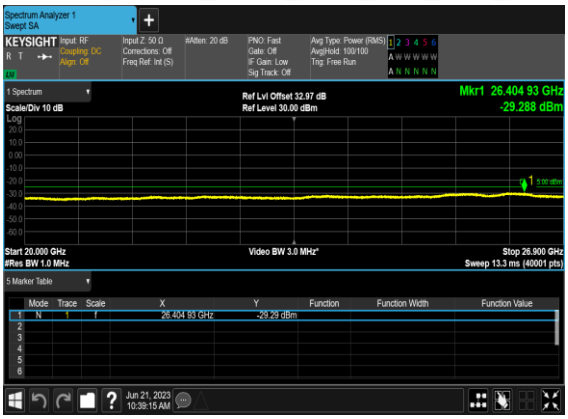

N41(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

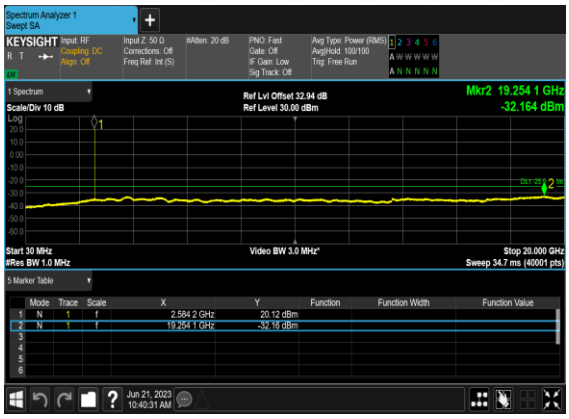

N41(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

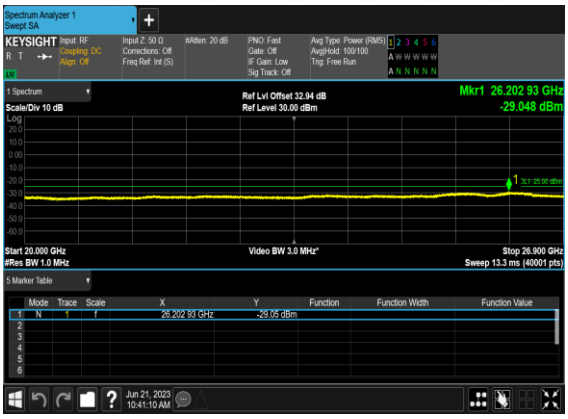

N41(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

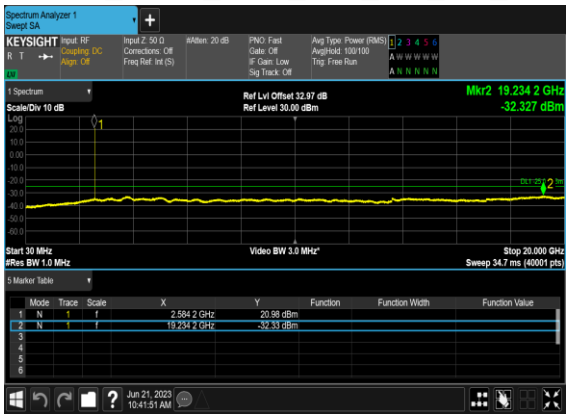

N41(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

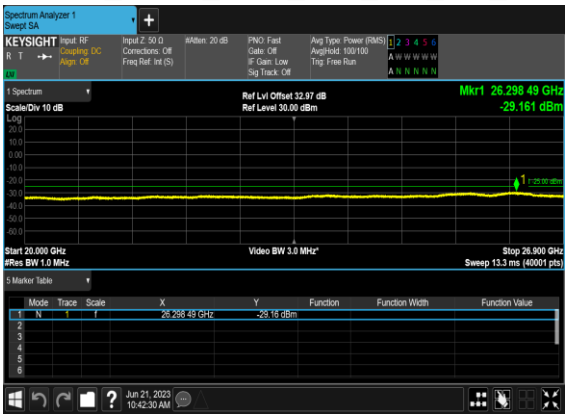

N41(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

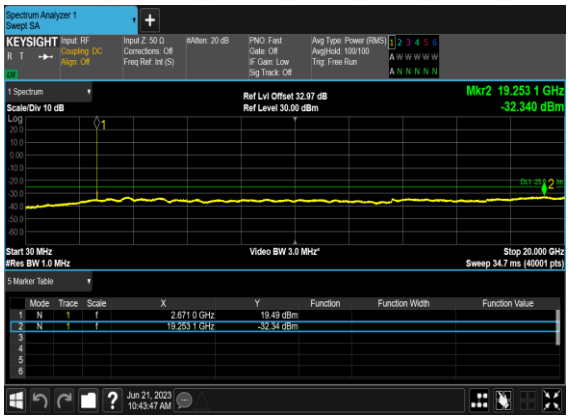

N41(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

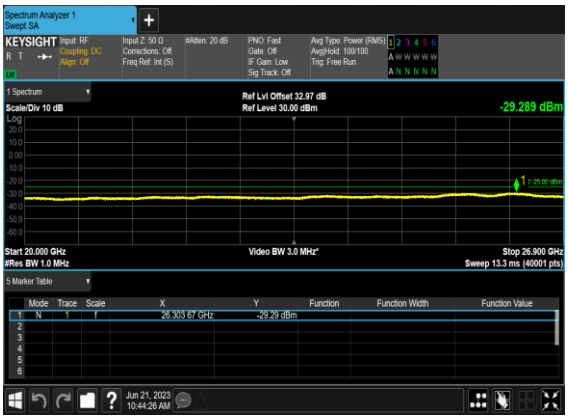

N41(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

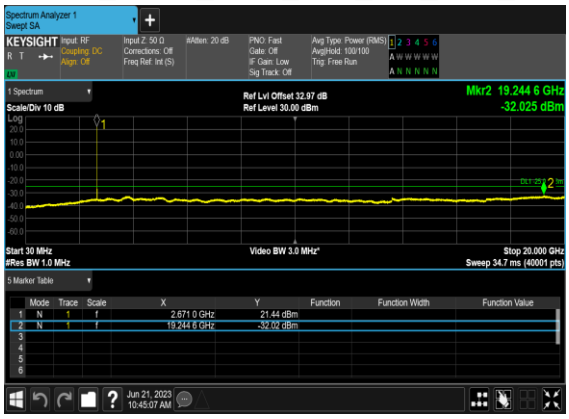

N41(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

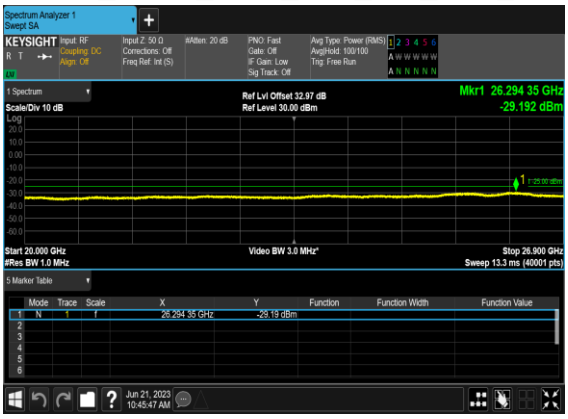

N41(50M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

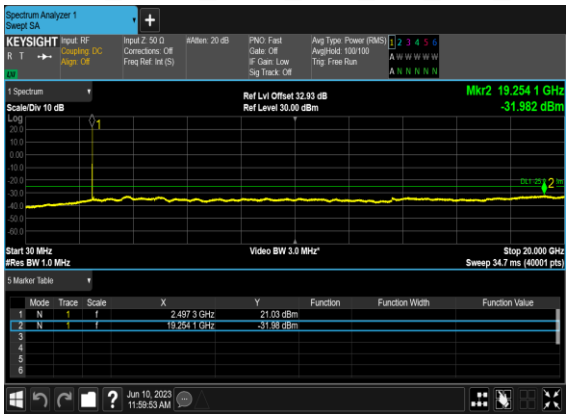

N41(50M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

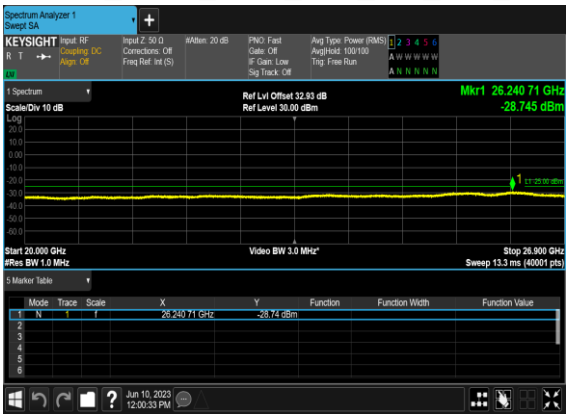

N41(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

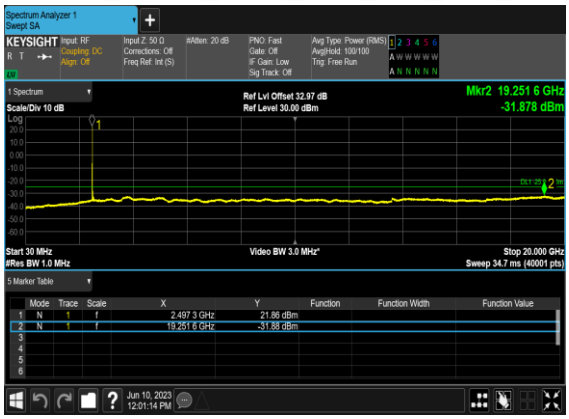

N41(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

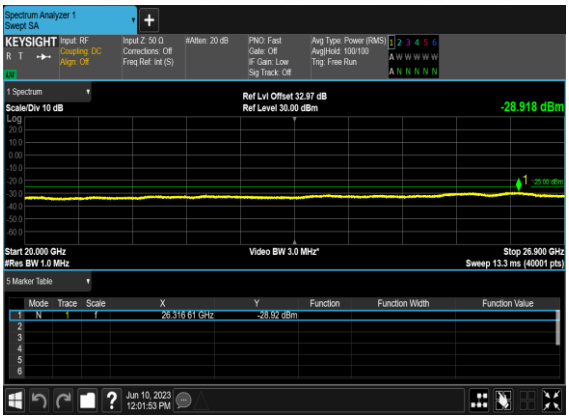

N41(50M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

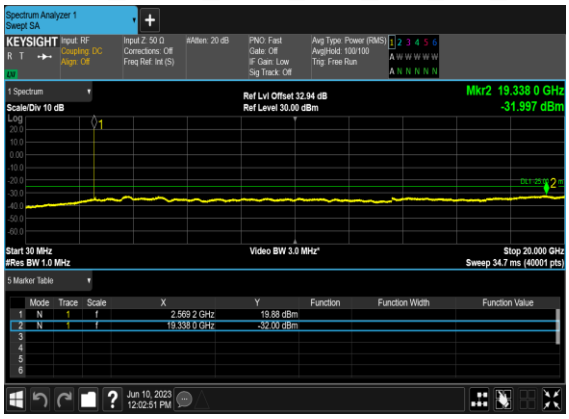

N41(50M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

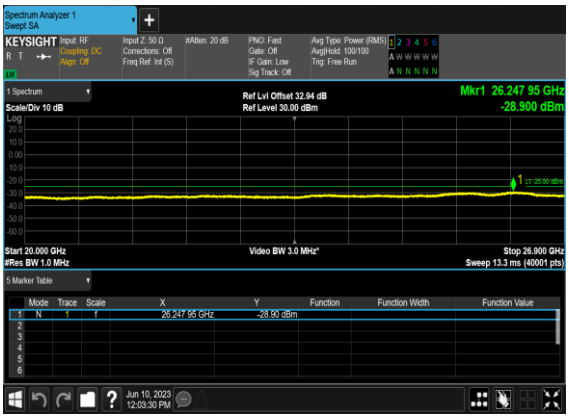

N41(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

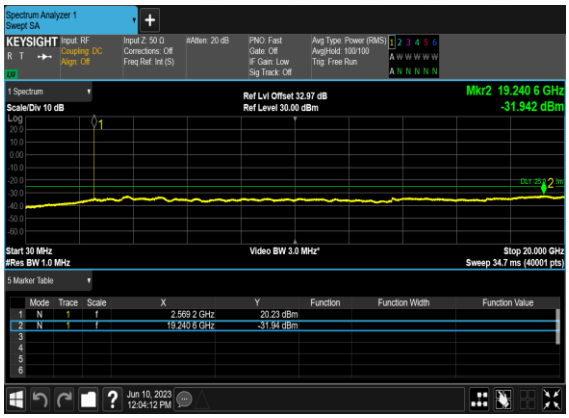

N41(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

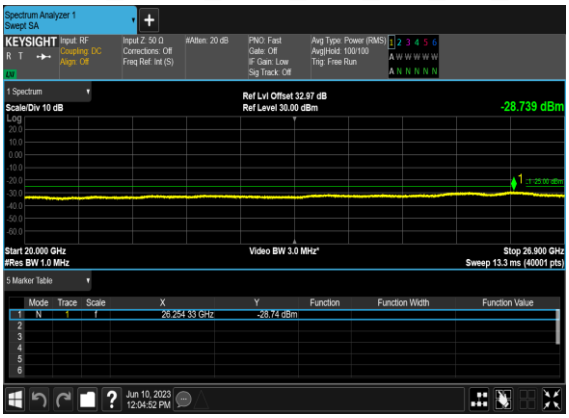

N41(50M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

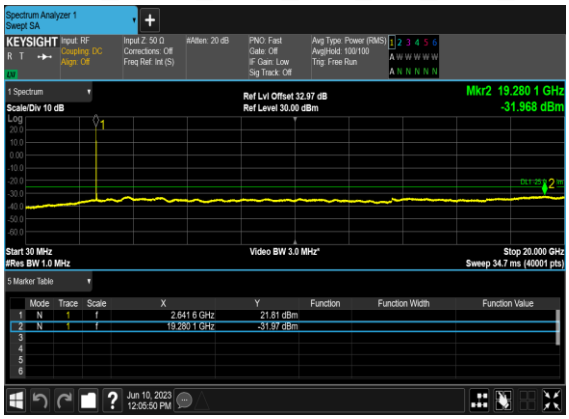

N41(50M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

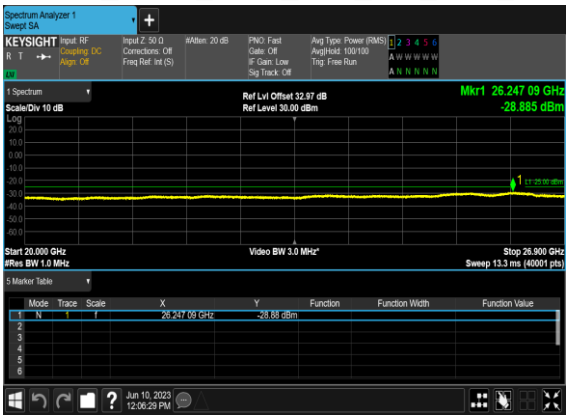

N41(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

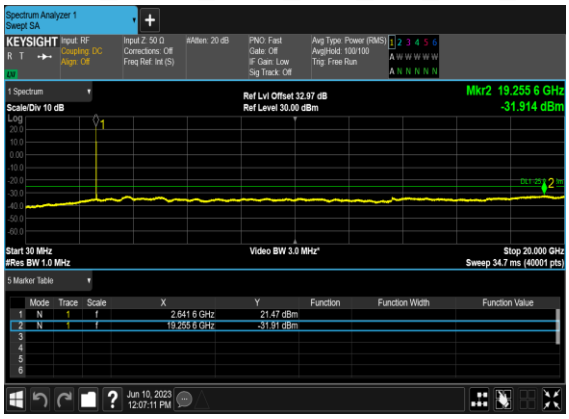

N41(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

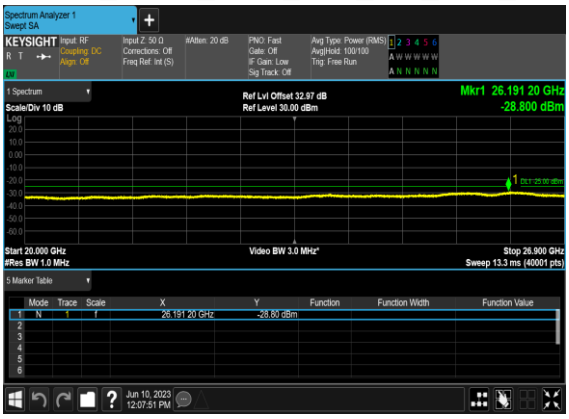

N41(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

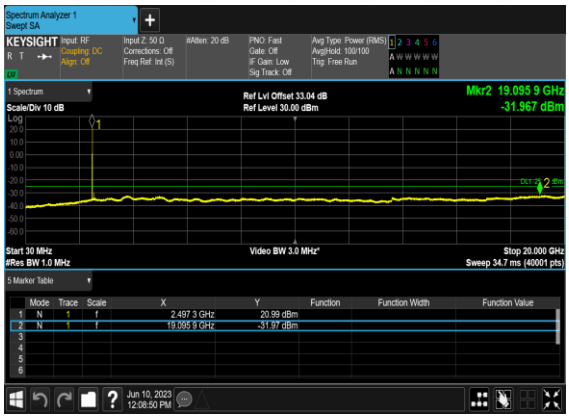

N41(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

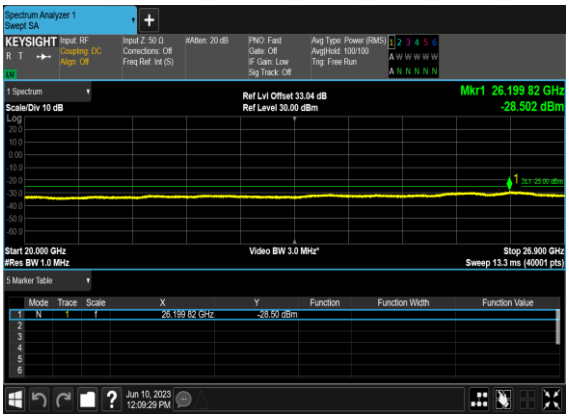

N41(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

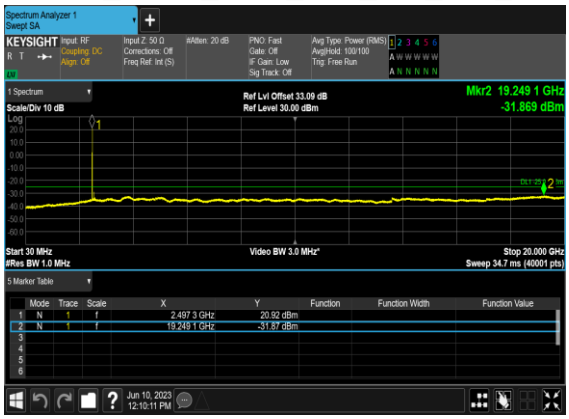

N41(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

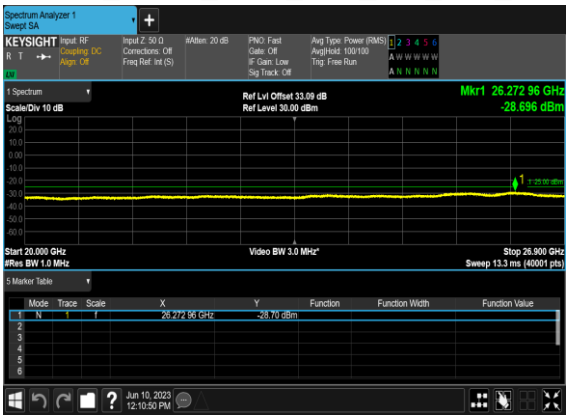

N41(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

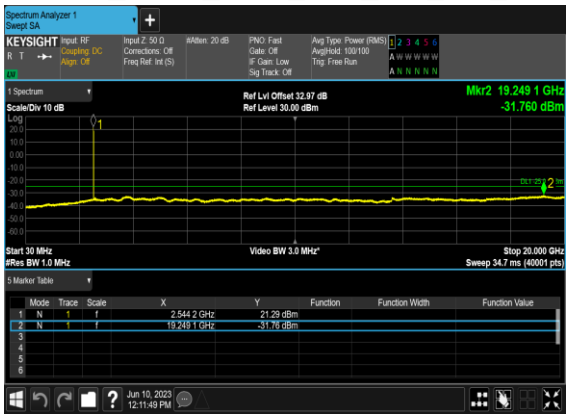

N41(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

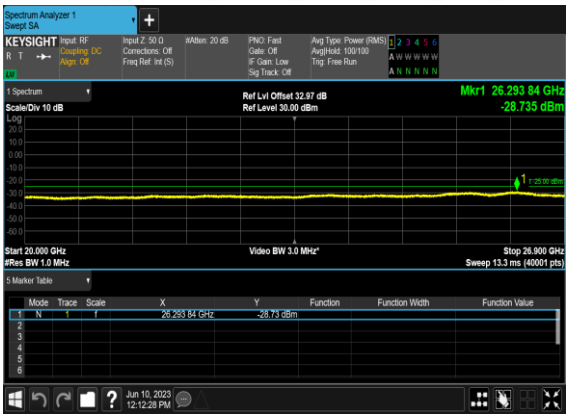

N41(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

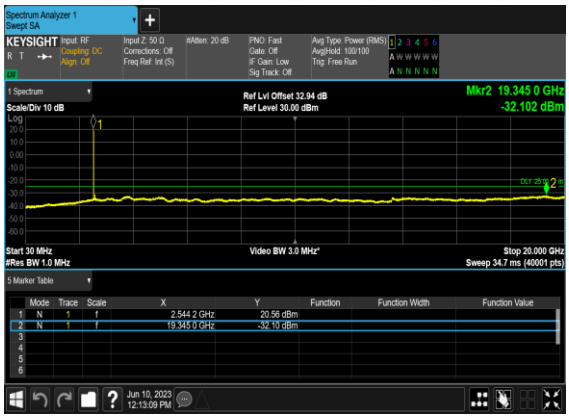

N41(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

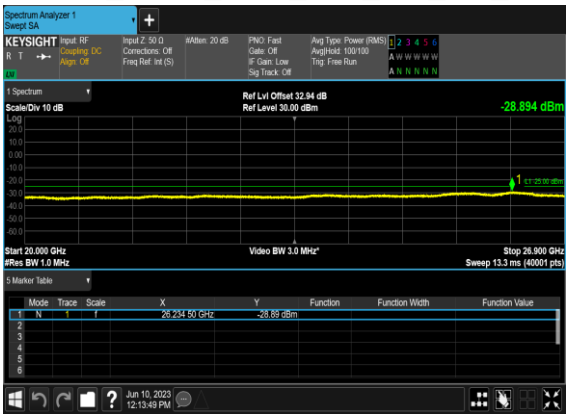

N41(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

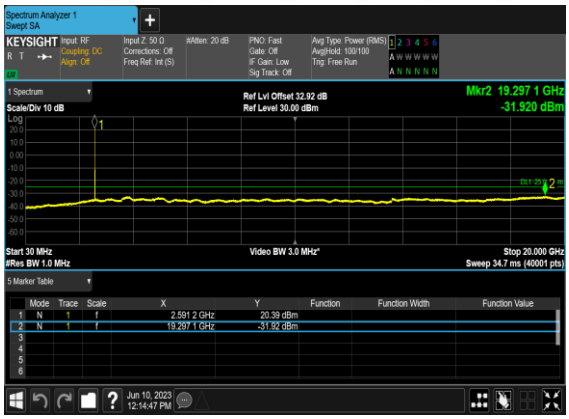

N41(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

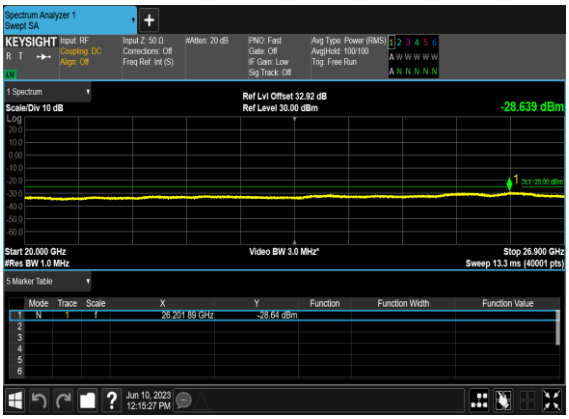

N41(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

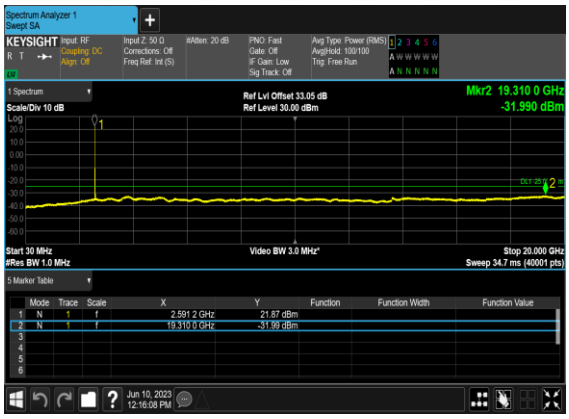

N41(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

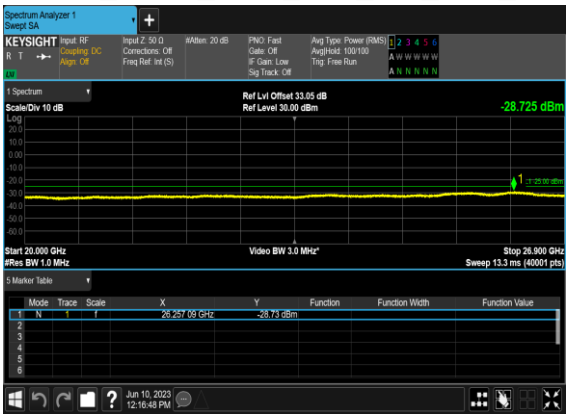

Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
41	30	20	501204	2506.02	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
41	30	20	501204	2506.02	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
41	30	20	501204	2506.02	DFT-s-OFDM BPSK	50@0	see graph	**PASS**
41	30	20	501204	2506.02	DFT-s-OFDM QPSK	50@0	see graph	**PASS**
41	30	20	535998	2679.99	DFT-s-OFDM BPSK	1@50	see graph	**PASS**
41	30	20	535998	2679.99	DFT-s-OFDM QPSK	1@50	see graph	**PASS**
41	30	20	535998	2679.99	DFT-s-OFDM BPSK	50@0	see graph	**PASS**
41	30	20	535998	2679.99	DFT-s-OFDM QPSK	50@0	see graph	**PASS**
41	30	50	504204	2521.02	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
41	30	50	504204	2521.02	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
41	30	50	504204	2521.02	DFT-s-OFDM BPSK	128@0	see graph	**PASS**
41	30	50	504204	2521.02	DFT-s-OFDM QPSK	128@0	see graph	**PASS**
41	30	50	532998	2664.99	DFT-s-OFDM BPSK	1@132	see graph	**PASS**
41	30	50	532998	2664.99	DFT-s-OFDM QPSK	1@132	see graph	**PASS**
41	30	50	532998	2664.99	DFT-s-OFDM BPSK	128@0	see graph	**PASS**
41	30	50	532998	2664.99	DFT-s-OFDM QPSK	128@0	see graph	**PASS**
41	30	100	509202	2546.01	DFT-s-OFDM BPSK	1@0	see graph	**PASS**
41	30	100	509202	2546.01	DFT-s-OFDM QPSK	1@0	see graph	**PASS**
41	30	100	509202	2546.01	DFT-s-OFDM BPSK	270@0	see graph	**PASS**
41	30	100	509202	2546.01	DFT-s-OFDM QPSK	270@0	see graph	**PASS**
41	30	100	528000	2640.0	DFT-s-OFDM BPSK	1@272	see graph	**PASS**
41	30	100	528000	2640.0	DFT-s-OFDM QPSK	1@272	see graph	**PASS**
41	30	100	528000	2640.0	DFT-s-OFDM BPSK	270@0	see graph	**PASS**
41	30	100	528000	2640.0	DFT-s-OFDM QPSK	270@0	see graph	**PASS**

N41(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

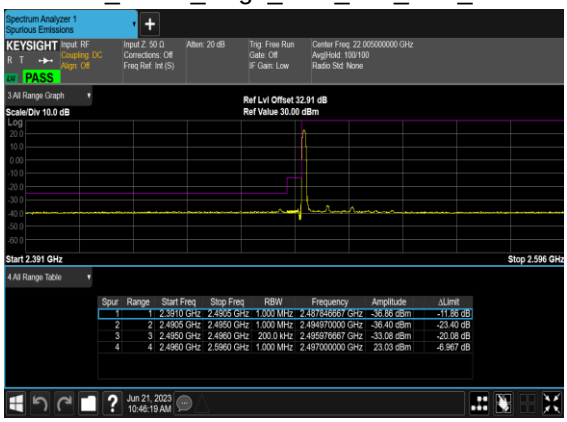

N41(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

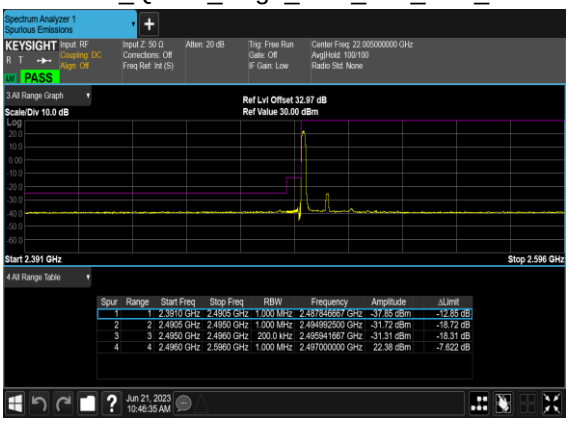

N41(20M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH

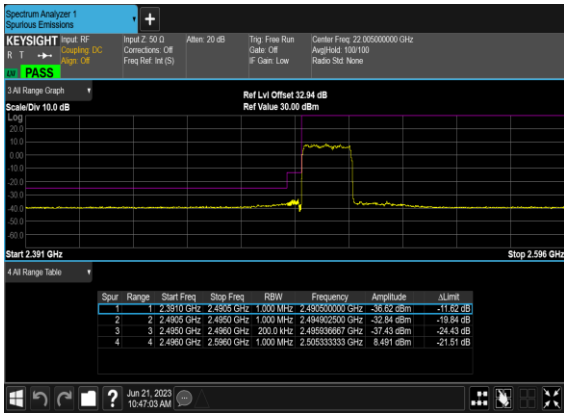

N41(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

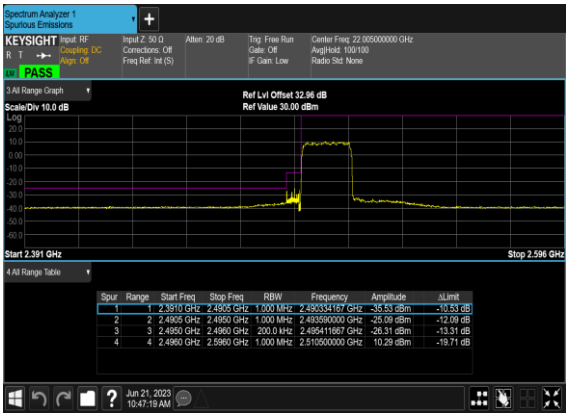

N41(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_High_CH

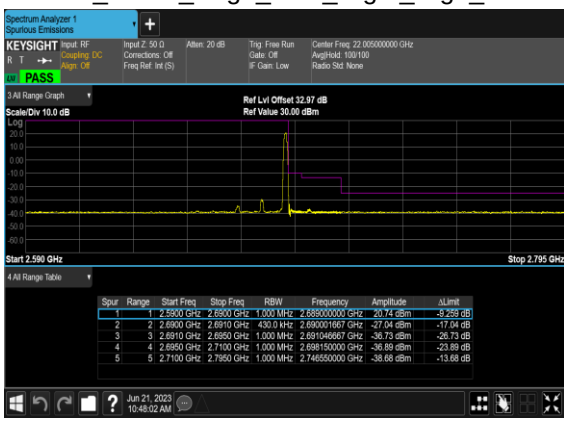

N41(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

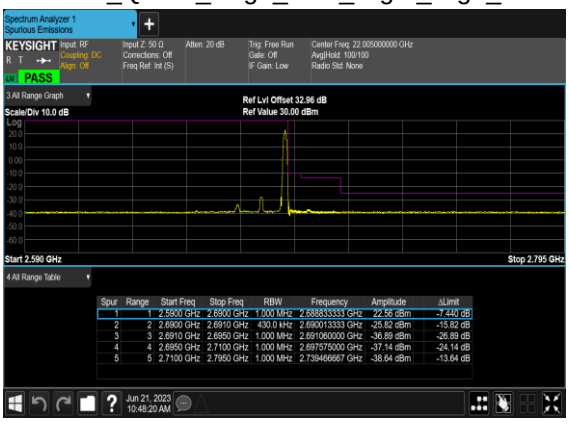

N41(20M)_DFT-s-OFDM_BPSK_Outer_Full_High_CH

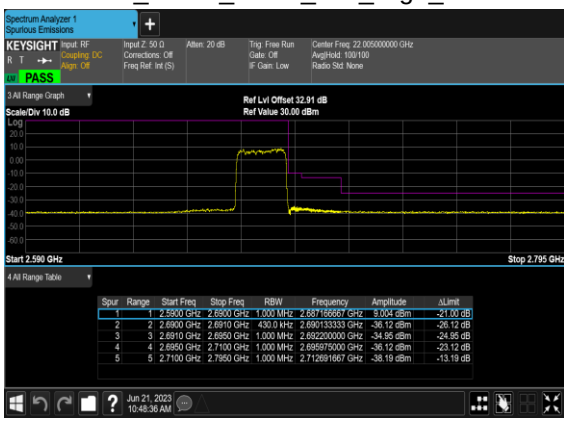

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	ΔLimit
1	1	2.5900 GHz	2.6900 GHz	1.000 MHz	2.687166667 GHz	9.004 dBm	-21.00 dB
2	2	2.6900 GHz	2.6910 GHz	430.0 kHz	2.690133333 GHz	-36.12 dBm	-26.12 dB
3	3	2.6910 GHz	2.6950 GHz	1.000 MHz	2.692200000 GHz	-34.95 dBm	-24.95 dB
4	4	2.6950 GHz	2.7100 GHz	1.000 MHz	2.695675000 GHz	-36.12 dBm	-23.12 dB
5	5	2.7100 GHz	2.7950 GHz	1.000 MHz	2.712691667 GHz	-38.19 dBm	-13.19 dB

N41(20M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

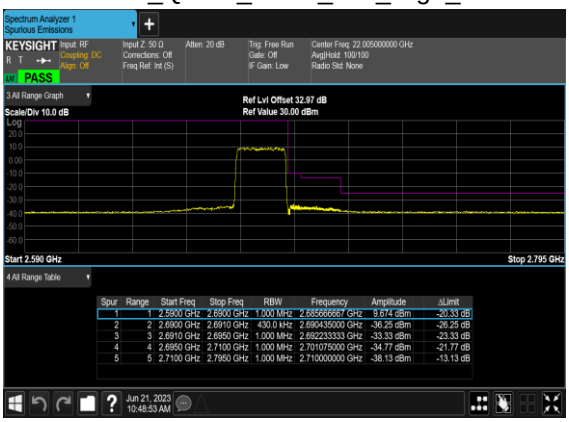

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	ΔLimit
1	1	2.5900 GHz	2.6900 GHz	1.000 MHz	2.685666667 GHz	9.674 dBm	-20.33 dB
2	2	2.6900 GHz	2.6910 GHz	430.0 kHz	2.690435000 GHz	-36.25 dBm	-26.25 dB
3	3	2.6910 GHz	2.6950 GHz	1.000 MHz	2.692233333 GHz	-33.33 dBm	-23.33 dB
4	4	2.6950 GHz	2.7100 GHz	1.000 MHz	2.701075000 GHz	-34.77 dBm	-21.77 dB
5	5	2.7100 GHz	2.7950 GHz	1.000 MHz	2.710000000 GHz	-38.13 dBm	-13.13 dB

N41(50M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

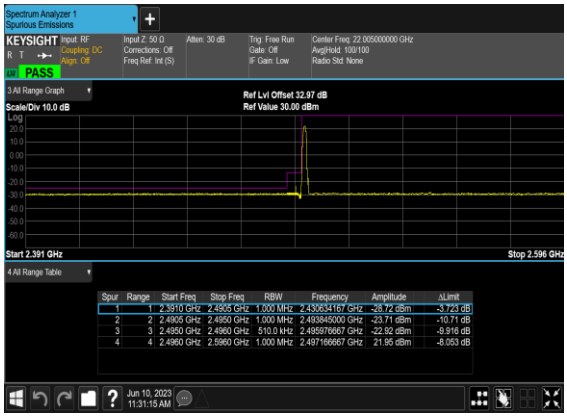

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	ΔLimit
1	1	2.3910 GHz	2.4905 GHz	1.000 MHz	2.439634167 GHz	-28.72 dBm	-3.723 dB
2	2	2.4905 GHz	2.4950 GHz	1.000 MHz	2.493845000 GHz	-23.71 dBm	-10.71 dB
3	3	2.4950 GHz	2.4960 GHz	510.0 kHz	2.495976667 GHz	-22.92 dBm	-9.916 dB
4	4	2.4960 GHz	2.5960 GHz	1.000 MHz	2.497166667 GHz	21.95 dBm	-8.053 dB

N41(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

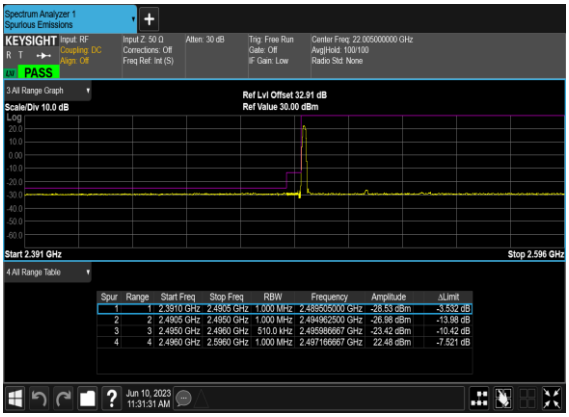

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	ΔLimit
1	1	2.3910 GHz	2.4905 GHz	1.000 MHz	2.485025000 GHz	-26.53 dBm	-3.532 dB
2	2	2.4905 GHz	2.4950 GHz	1.000 MHz	2.494962500 GHz	-26.96 dBm	-13.96 dB
3	3	2.4950 GHz	2.4960 GHz	510.0 kHz	2.495986667 GHz	-23.42 dBm	-10.42 dB
4	4	2.4960 GHz	2.5960 GHz	1.000 MHz	2.497166667 GHz	22.48 dBm	-7.521 dB

N41(50M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH

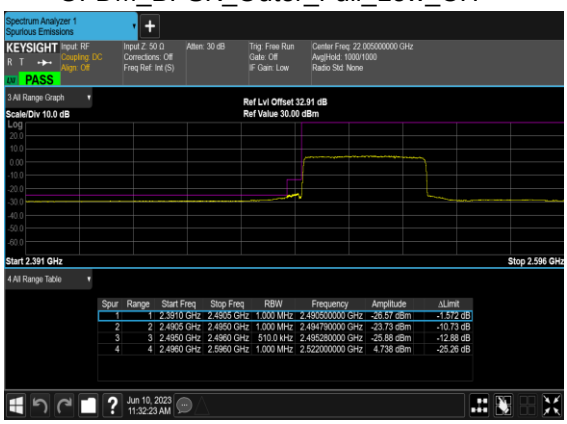

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	ΔLimit
1	1	2.3910 GHz	2.4905 GHz	1.000 MHz	2.490500000 GHz	-26.57 dBm	-1.572 dB
2	2	2.4905 GHz	2.4950 GHz	1.000 MHz	2.494790000 GHz	-23.73 dBm	-10.73 dB
3	3	2.4950 GHz	2.4960 GHz	510.0 kHz	2.495280000 GHz	-25.88 dBm	-12.88 dB
4	4	2.4960 GHz	2.5960 GHz	1.000 MHz	2.522000000 GHz	4.738 dBm	-25.26 dB

N41(50M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

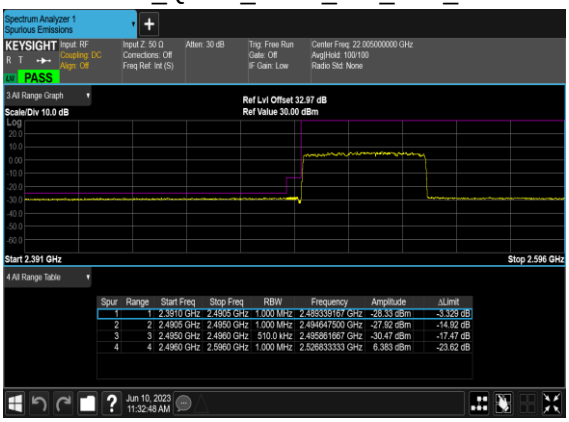

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	ΔLimit
1	1	2.3910 GHz	2.4905 GHz	1.000 MHz	2.488339167 GHz	-28.33 dBm	-3.329 dB
2	2	2.4905 GHz	2.4950 GHz	1.000 MHz	2.494647500 GHz	-27.92 dBm	-14.92 dB
3	3	2.4950 GHz	2.4960 GHz	510.0 kHz	2.495861667 GHz	-30.47 dBm	-17.47 dB
4	4	2.4960 GHz	2.5960 GHz	1.000 MHz	2.526833333 GHz	6.383 dBm	-23.62 dB

N41(50M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_High_CH

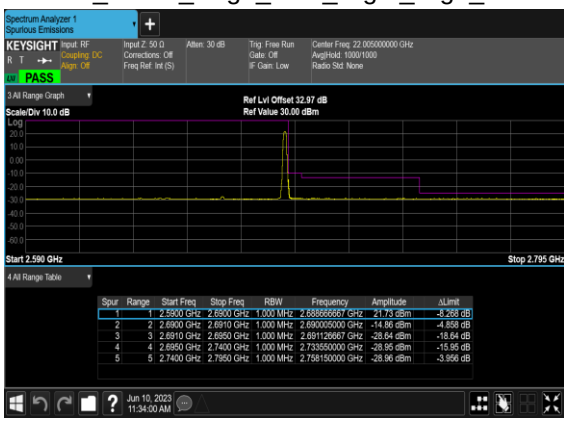

N41(50M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

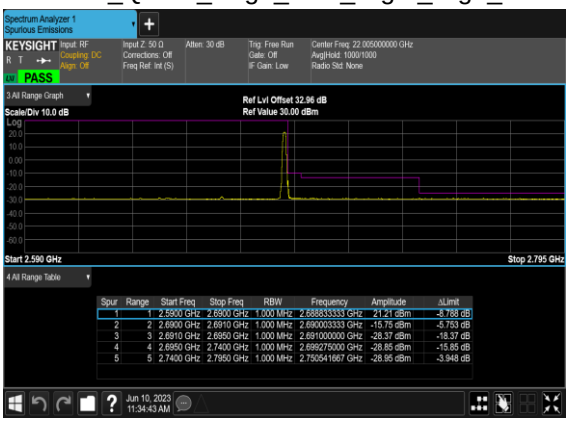

N41(50M)_DFT-s-OFDM_BPSK_Outer_Full_High_CH

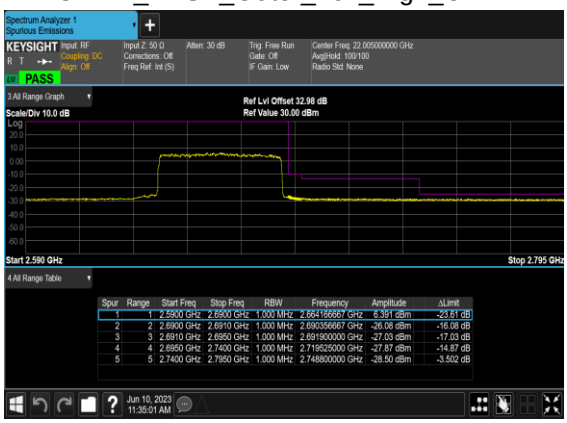

N41(50M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

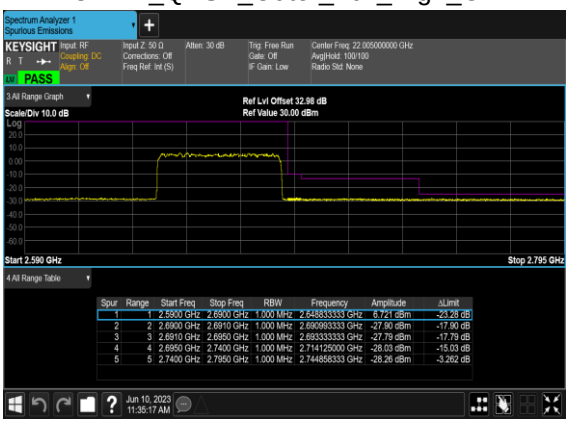

N41(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

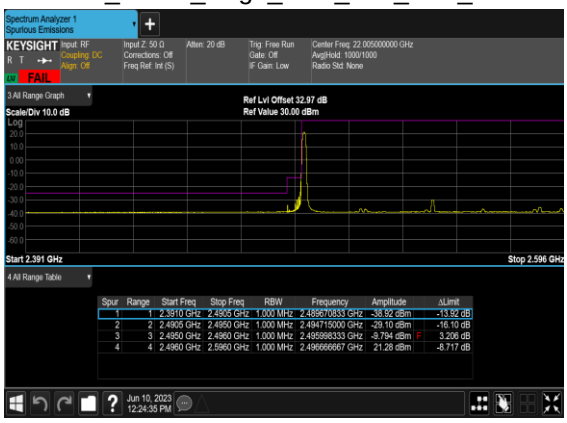

N41(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH_**CHP_PAS**

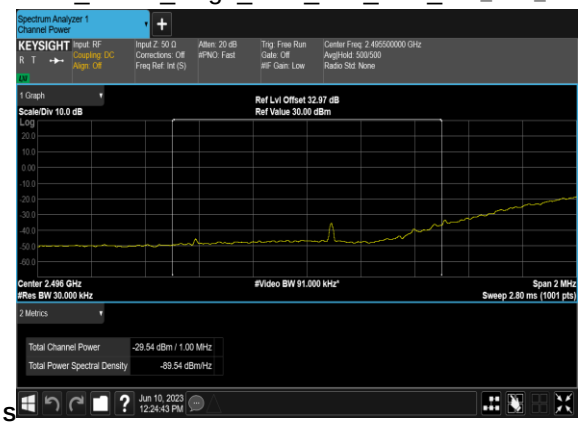

S

N41(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

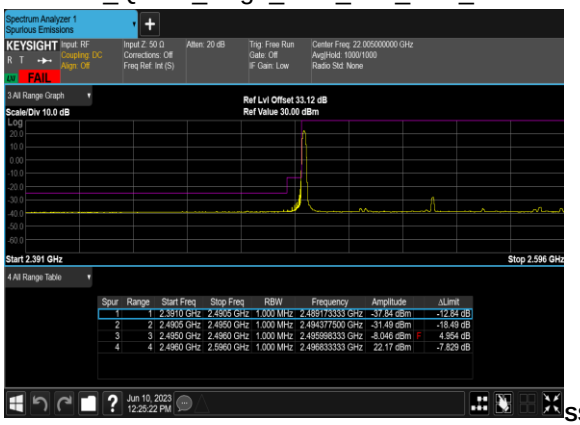

N41(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH_**CHP_PASS**

N41(100M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH

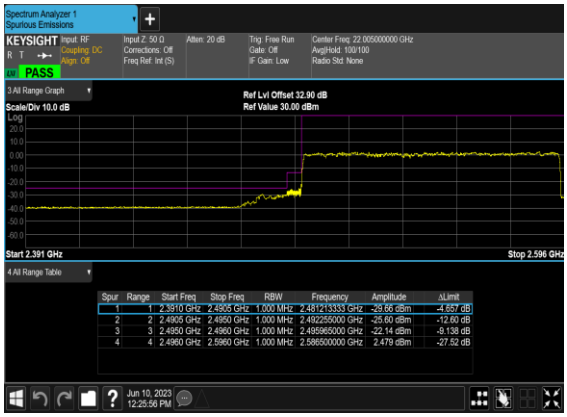

N41(100M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

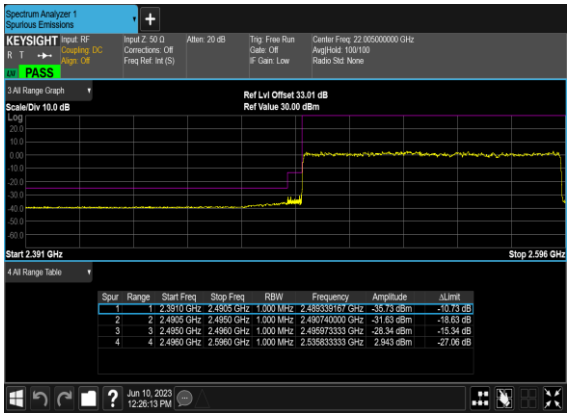

N41(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_High_CH

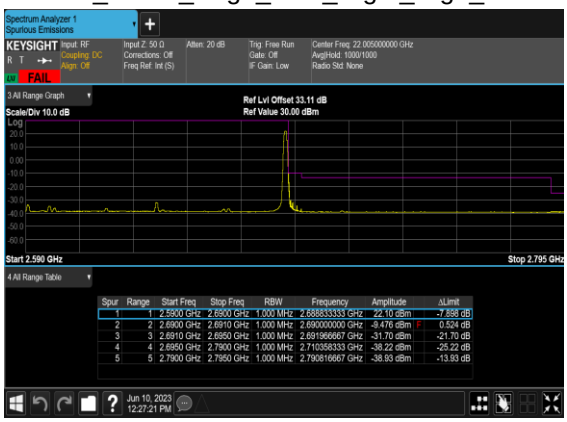

N41(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_High_CH_**CHP_PASS**

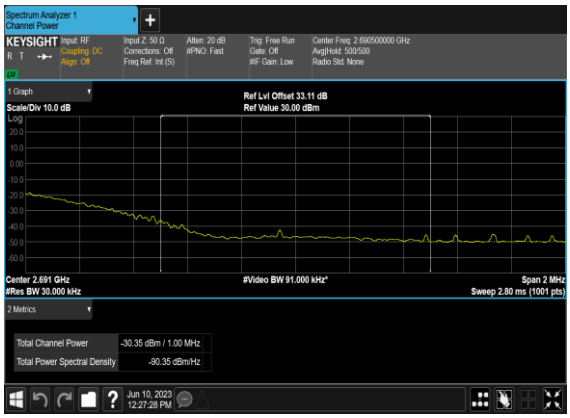

N41(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

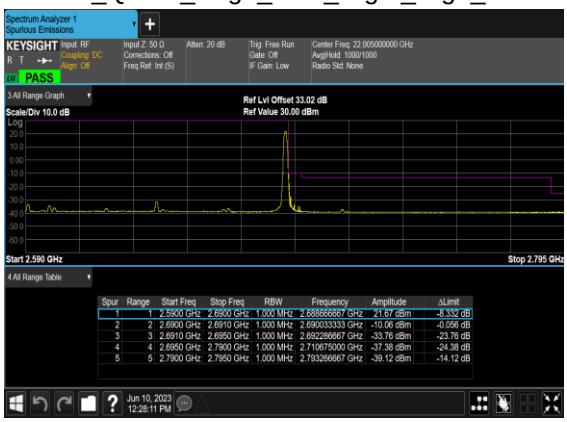

N41(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH_**CHP_PASS**

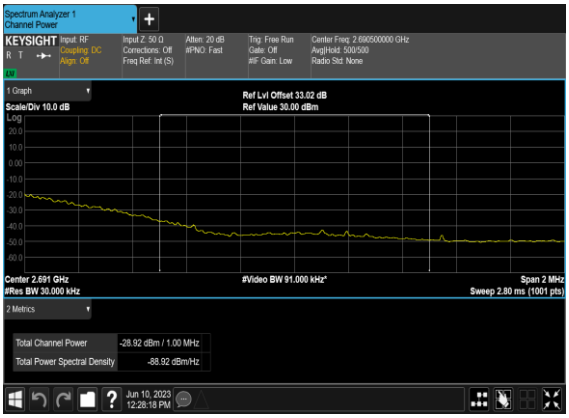

N41(100M)_DFT-s-OFDM_BPSK_Outer_Full_High_CH

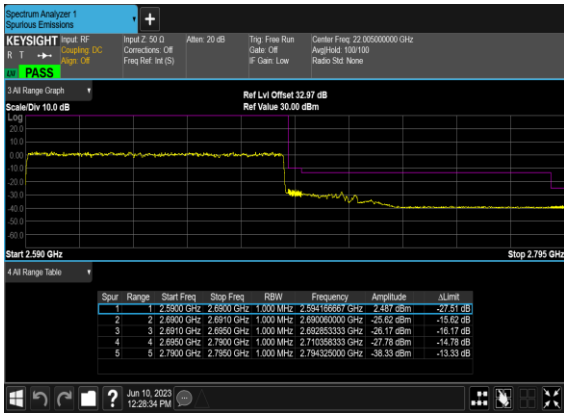
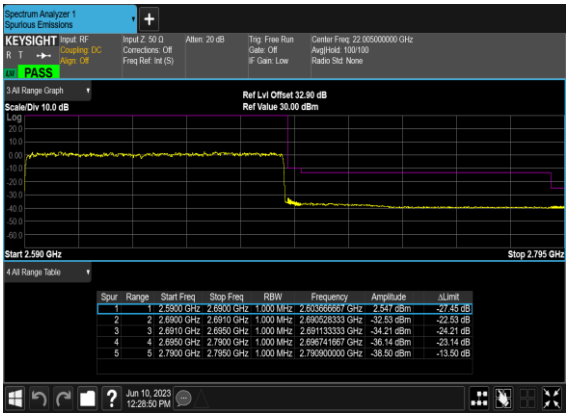
N41(100M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH