| Mode | 22 | |
|---|---|---|
| | Band Edge - L | |
| | U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full_5310MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 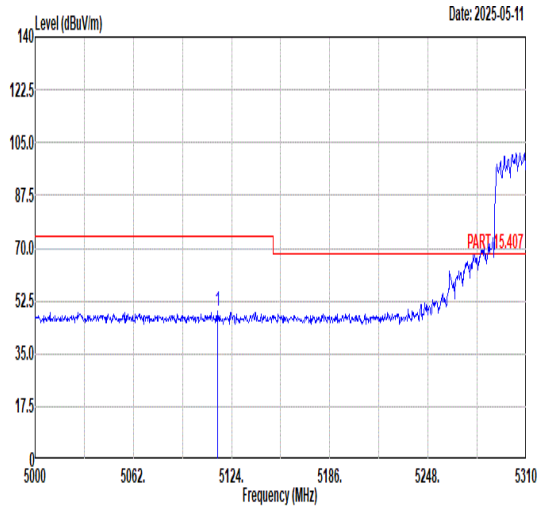 | 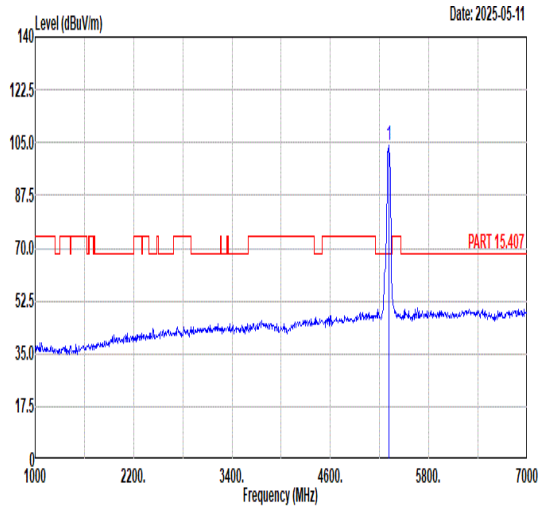 |
| Avg | 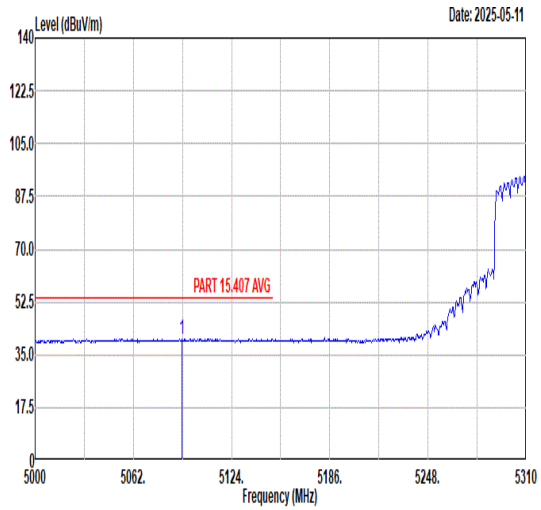 | 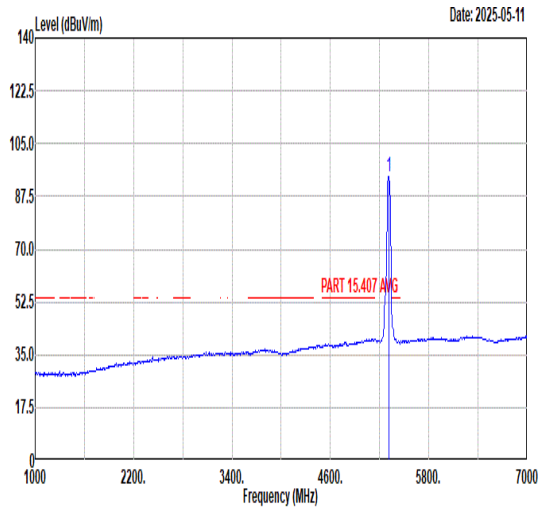 |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5115.01 | 49.18 | 74.00 | -24.82 | 40.06 | 33.97 | 7.90 | 32.75 | 229 | 145 | PEAK |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5310.00 | 104.08 | ------ | ------ | 94.43 | 34.09 | 8.23 | 32.67 | 229 | 145 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5092.69 | 40.32 | 54.00 | -13.68 | 31.24 | 33.96 | 7.88 | 32.76 | 229 | 145 | AVERAGE |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5310.00 | 94.27 | ------ | ------ | 84.64 | 34.08 | 8.22 | 32.67 | 229 | 145 | AVERAGE |

| Mode | 22 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full_5310MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 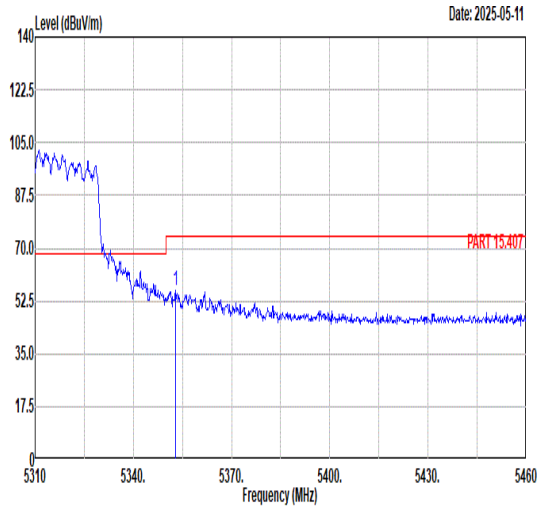 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5352.90 55.80 74.00 -18.20 46.01 34.11 8.34 32.66 229 145 PEAK | Blank |
| Avg | 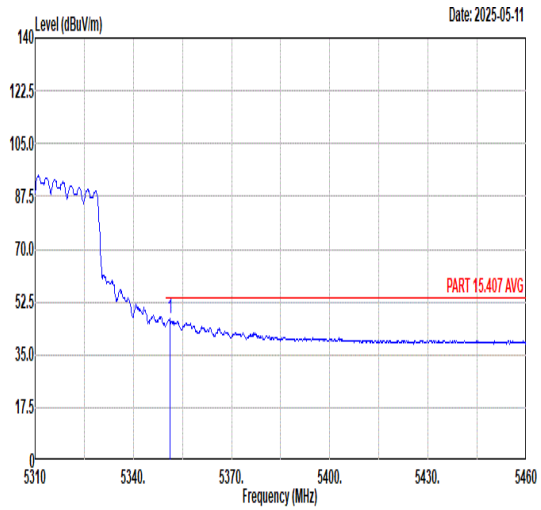 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5351.10 47.06 54.00 -6.94 37.28 34.11 8.33 32.66 229 145 AVERAGE | Blank |

| Mode | 22 | |
|---|---|---|
| | Band Edge - L | |
| | U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full_5310MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |

**Peak**




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5023.25 | 49.02 | 74.00 | -24.98 | 40.06 | 33.92 | 7.83 | 32.79 | 113 | 302 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5310.00 | 97.65 | ------ | ------ | 87.98 | 34.09 | 8.25 | 32.67 | 113 | 302 | PEAK |

**Avg**

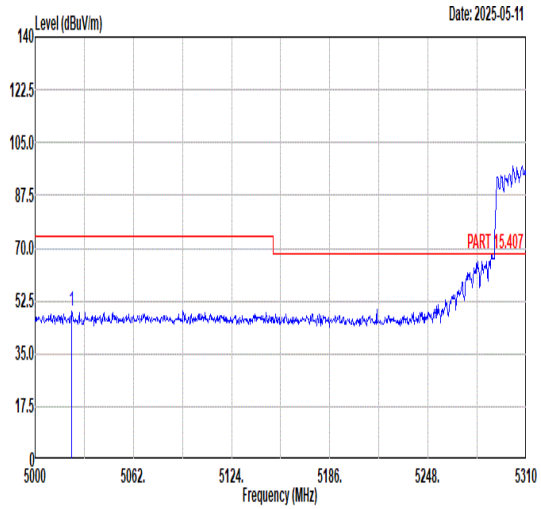


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5121.21 | 40.16 | 54.00 | -13.84 | 31.04 | 33.97 | 7.90 | 32.75 | 113 | 302 | AVERAGE |

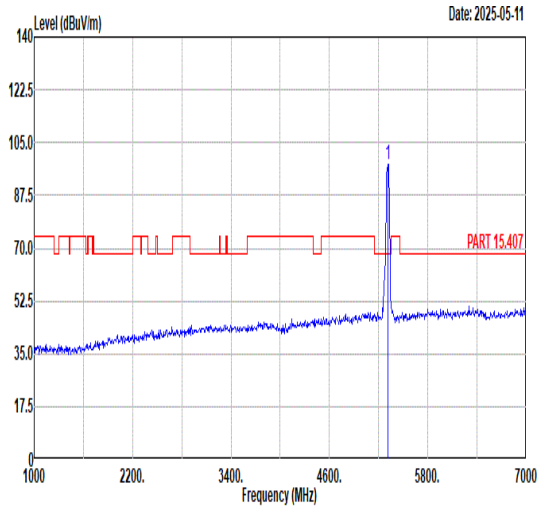


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5310.00 | 89.61 | ------ | ------ | 79.98 | 34.08 | 8.22 | 32.67 | 113 | 302 | AVERAGE |

| Mode | 22 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full_5310MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 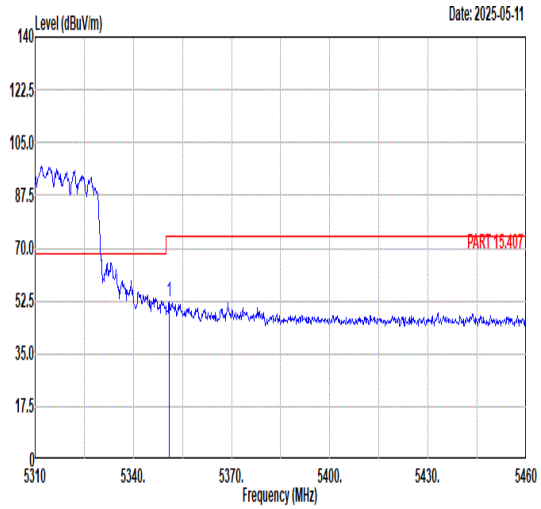 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5350.95 52.11 74.00 -21.89 42.33 34.11 8.33 32.66 113 302 PEAK | Blank |
| Avg | 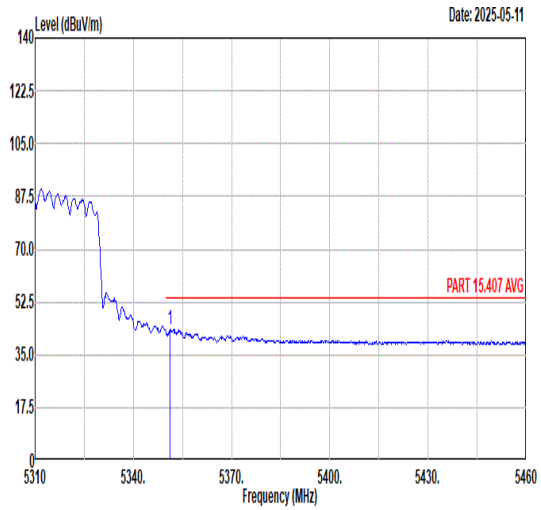 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5351.10 43.22 54.00 -10.78 33.44 34.11 8.33 32.66 113 302 AVERAGE | Blank |
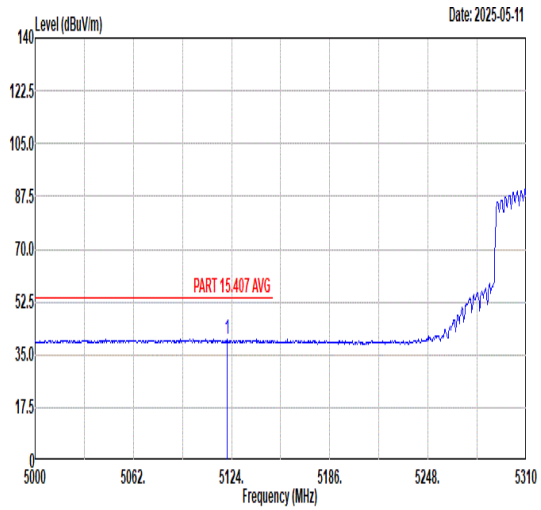
| Mode | 22 | |
|---|---|---|
| | Harmonic | |
| | U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full_5310MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Vertical |
| Peak<br>Avg | 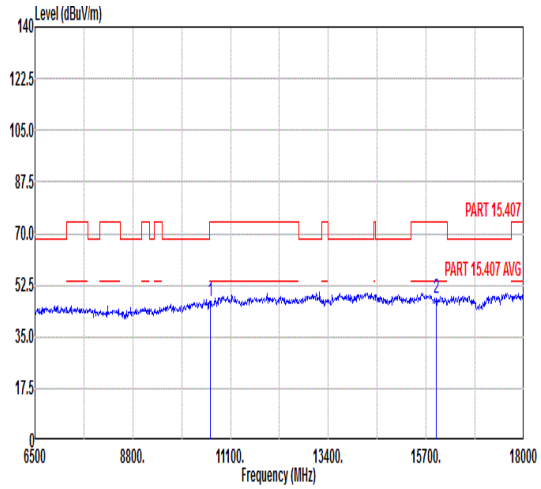 | 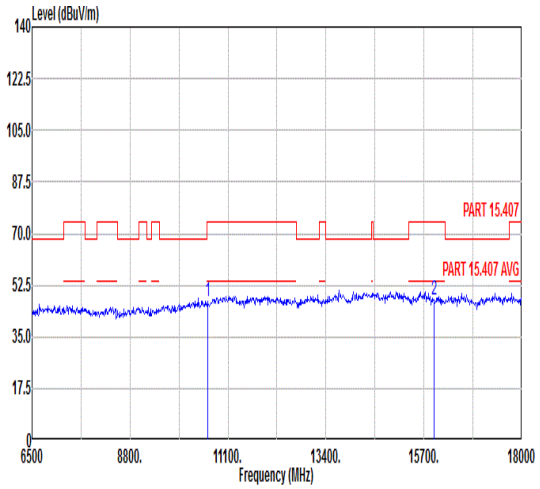 |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 10620.00 | 46.95 | 74.00 | -27.05 | 57.00 | 37.74 | 10.92 | 58.71 | --- | --- | Peak |
| 2 | 15930.00 | 47.86 | 74.00 | -26.14 | 54.93 | 39.57 | 12.70 | 59.34 | --- | --- | Peak |
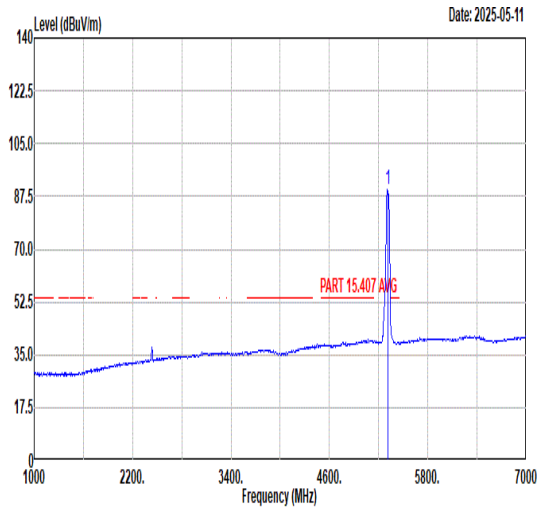
| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 10620.00 | 47.05 | 74.00 | -26.95 | 57.10 | 37.74 | 10.92 | 58.71 | --- | --- | Peak |
| 2 | 15930.00 | 47.43 | 74.00 | -26.57 | 54.50 | 39.57 | 12.70 | 59.34 | --- | --- | Peak |

| Mode | 23 | |
|---|---|---|
| | Band Edge - L | |
| | U-NII-2C_5.47-5.725_802.11be EHT40_CH102_Full_5510MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |

**Peak**




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5458.16 | 52.16 | 74.00 | -21.84 | 42.19 | 34.17 | 8.41 | 32.61 | 109 | 141 | PEAK |
| 2 | 5467.92 | 53.80 | 68.30 | -14.50 | 43.83 | 34.18 | 8.40 | 32.61 | 109 | 141 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5510.00 | 102.22 | ------ | ------ | 92.28 | 34.20 | 8.35 | 32.61 | 109 | 141 | PEAK |

**Avg**

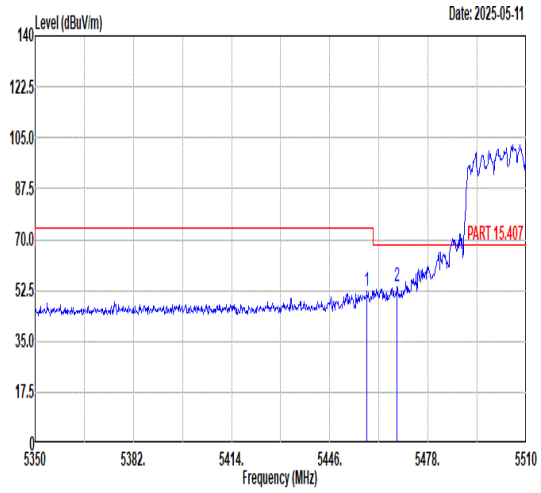


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5458.32 | 43.20 | 54.00 | -10.80 | 33.23 | 34.17 | 8.41 | 32.61 | 109 | 141 | AVERAGE |

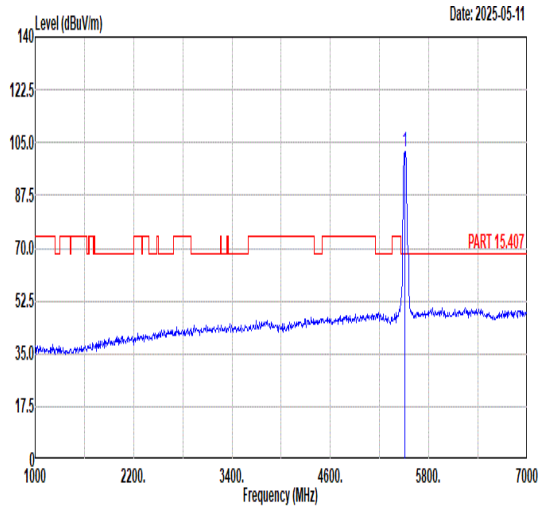


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5510.00 | 94.64 | ------ | ------ | 84.70 | 34.20 | 8.35 | 32.61 | 109 | 141 | AVERAGE |

| Mode | 23 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-2C_5.47-5.725_802.11be EHT40_CH102_Full_5510MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 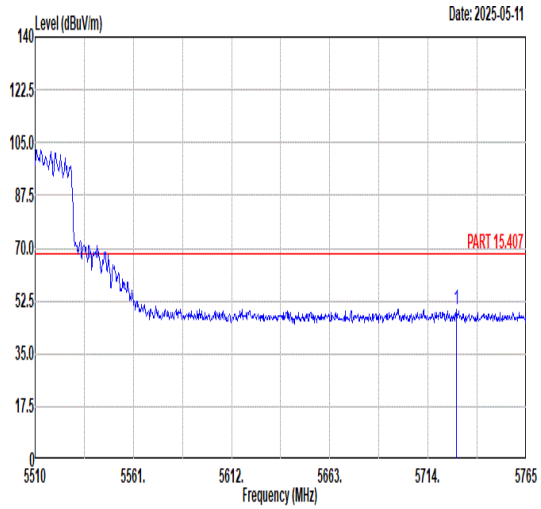 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5728.79 49.64 68.30 -18.66 39.12 34.61 8.69 32.78 109 141 PEAK | Blank |
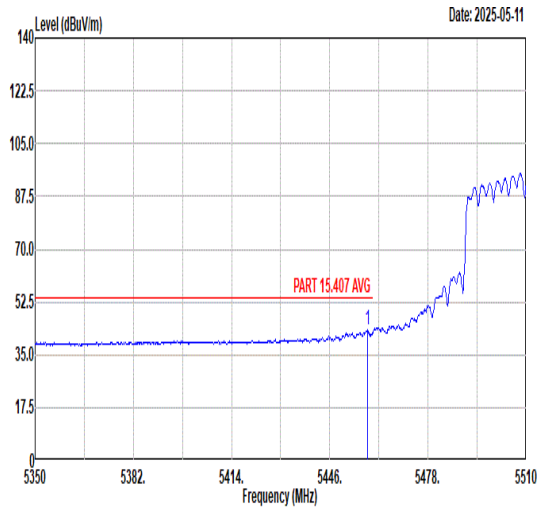
| Mode | 23 | |
|---|---|---|
| | Band Edge - L | |
| | U-NII-2C_5.47-5.725_802.11be EHT40_CH102_Full_5510MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 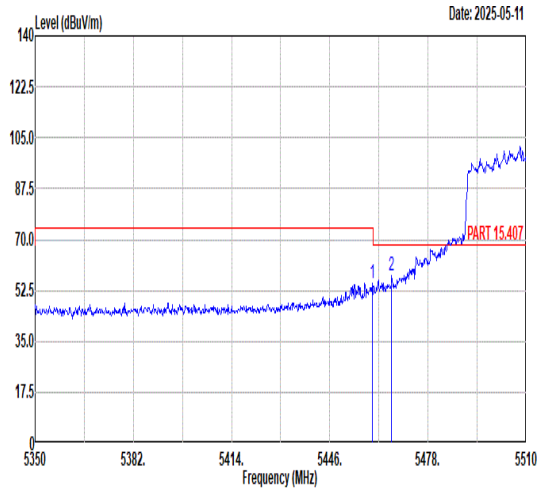 | 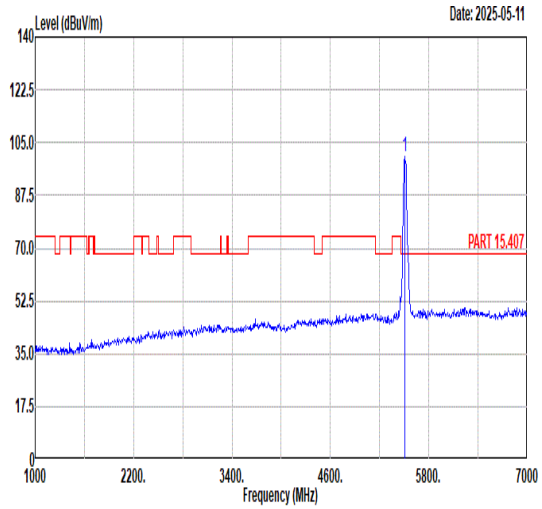 |
| Avg | 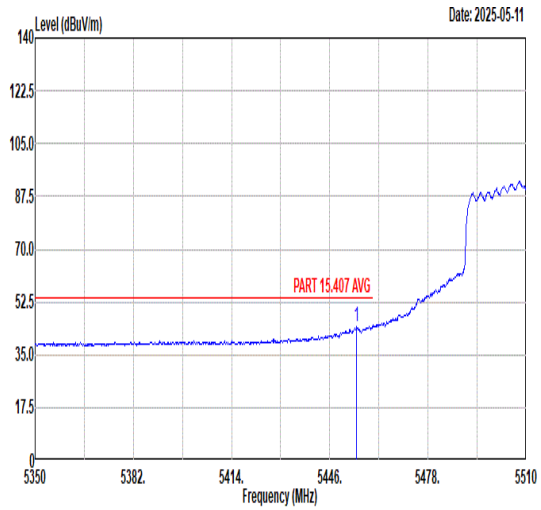 | 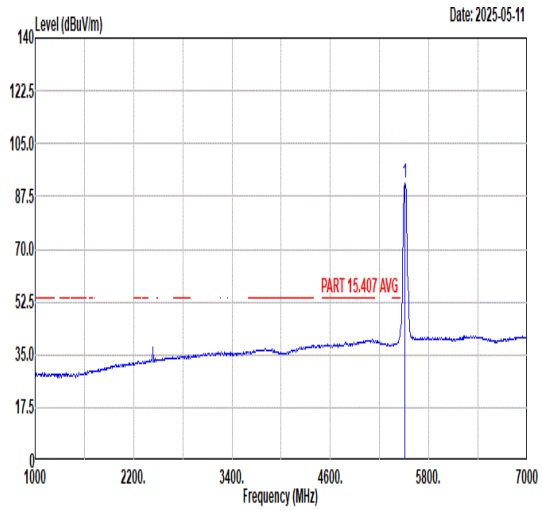 |

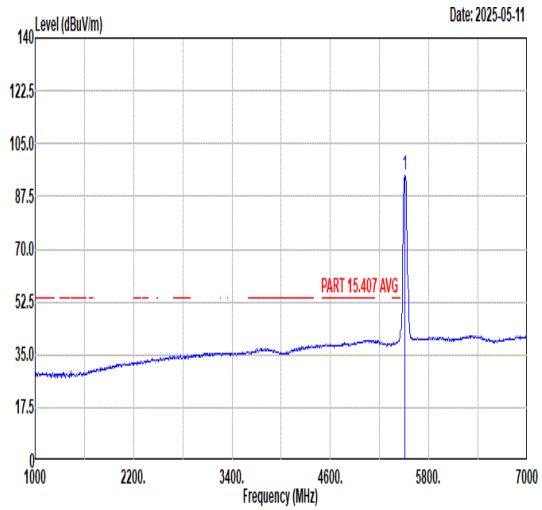

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5459.76 | 55.13 | 74.00 | -18.87 | 45.16 | 34.17 | 8.41 | 32.61 | 244 | 53 | PEAK |
| 2 | 5466.16 | 57.38 | 68.30 | -10.92 | 47.41 | 34.18 | 8.40 | 32.61 | 244 | 53 | PEAK |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5510.00 | 100.29 | ------ | ------ | 90.35 | 34.20 | 8.35 | 32.61 | 244 | 53 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5454.80 | 44.38 | 54.00 | -9.62 | 34.41 | 34.17 | 8.42 | 32.62 | 244 | 53 | AVERAGE |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5510.00 | 91.94 | ------ | ------ | 82.00 | 34.20 | 8.35 | 32.61 | 244 | 53 | AVERAGE |

| Mode | 23 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-2C_5.47-5.725_802.11be EHT40_CH102_Full_5510MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 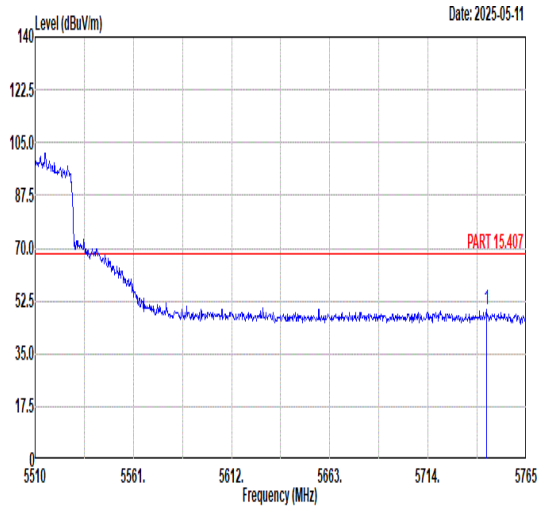 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5744.60 49.53 68.30 -18.77 38.93 34.64 8.75 32.79 244 53 PEAK | Blank |

| Mode | 23 | |
|---|---|---|
| | Harmonic | |
| | U-NII-2C_5.47-5.725_802.11be EHT40_CH102_Full_5510MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Vertical |
| Peak<br>Avg | 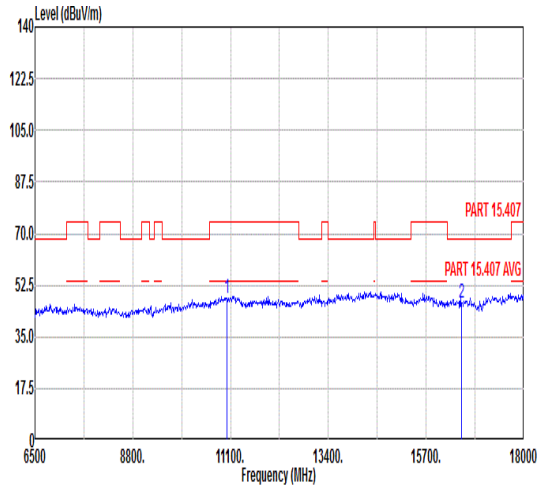 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 11020.00 48.24 74.00 -25.76 56.86 38.43 11.22 58.27 --- --- Peak<br>2 16530.00 46.57 68.30 -21.73 52.04 40.42 12.92 58.81 --- --- Peak | 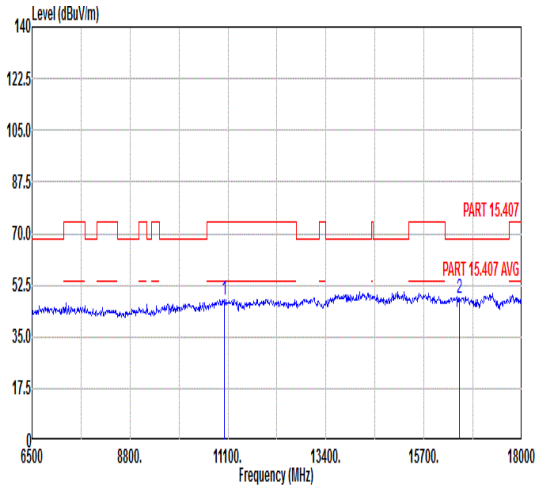 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 11020.00 47.51 74.00 -26.49 56.13 38.43 11.22 58.27 --- --- Peak<br>2 16530.00 47.89 68.30 -20.41 53.36 40.42 12.92 58.81 --- --- Peak |

| Mode | 24 | |
|---|---|---|
| | Harmonic | |
| | U-NII-2C_5.47-5.725_802.11be EHT40_CH110_Full_5550MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Vertical |
| Peak<br>Avg | 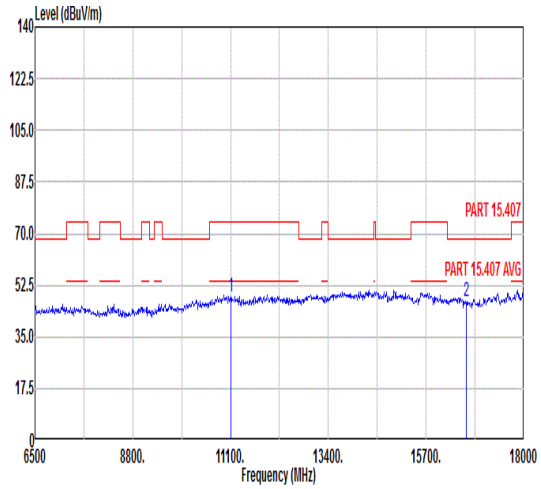 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 11100.00 48.46 74.00 -25.54 57.18 38.21 11.26 58.19 --- --- Peak<br>2 16650.00 46.79 68.30 -21.51 51.98 40.52 12.97 58.68 --- --- Peak | 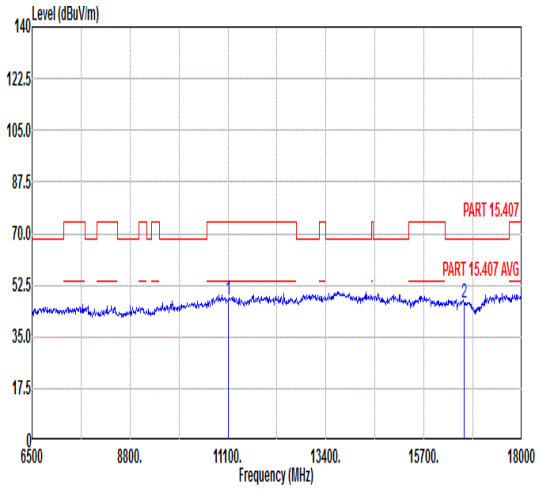 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 11100.00 47.59 74.00 -26.41 56.31 38.21 11.26 58.19 --- --- Peak<br>2 16650.00 46.42 68.30 -21.88 51.61 40.52 12.97 58.68 --- --- Peak |

| Mode | 25 |
|---|---|
| | Band Edge - L |
| | U-NII-2C_5.47-5.725_802.11be EHT40_CH134_Full_5670MHz |
| ANT | CDD 6+17 |

| Pol. | Horizontal | Fundamental |
|---|---|---|

**Peak**




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5418.16 | 47.91 | 74.00 | -26.09 | 37.92 | 34.15 | 8.47 | 32.63 | 100 | 141 | PEAK |
| 2 | 5466.80 | 47.58 | 68.30 | -20.72 | 37.61 | 34.18 | 8.40 | 32.61 | 100 | 141 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5670.00 | 102.68 | ------ | ------ | 92.46 | 34.50 | 8.46 | 32.74 | 100 | 141 | PEAK |

**Avg**

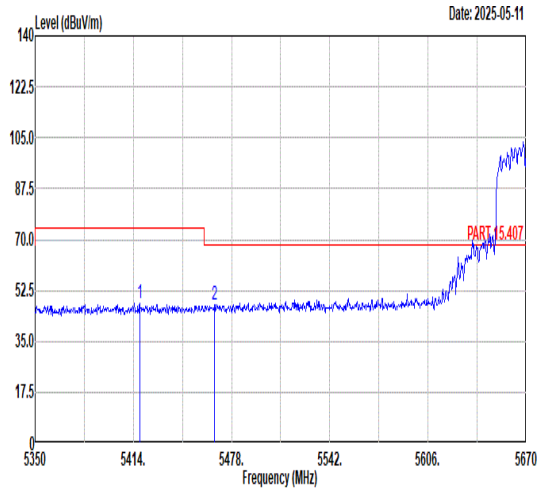


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5426.16 | 39.49 | 54.00 | -14.51 | 29.52 | 34.15 | 8.45 | 32.63 | 100 | 141 | AVERAGE |

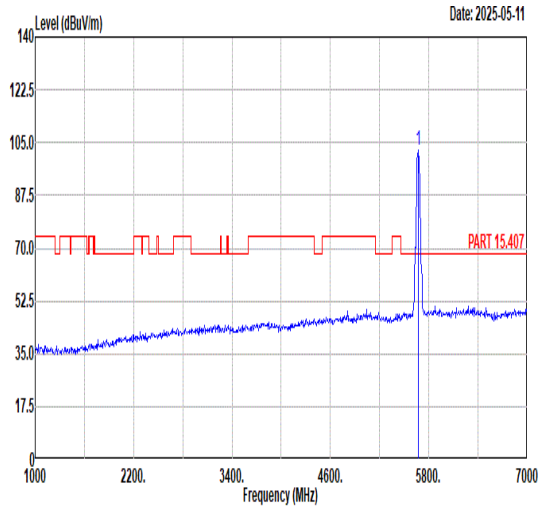


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5670.00 | 94.85 | ------ | ------ | 84.63 | 34.50 | 8.46 | 32.74 | 100 | 141 | AVERAGE |

| Mode | 25 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-2C_5.47-5.725_802.11be EHT40_CH134_Full_5670MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 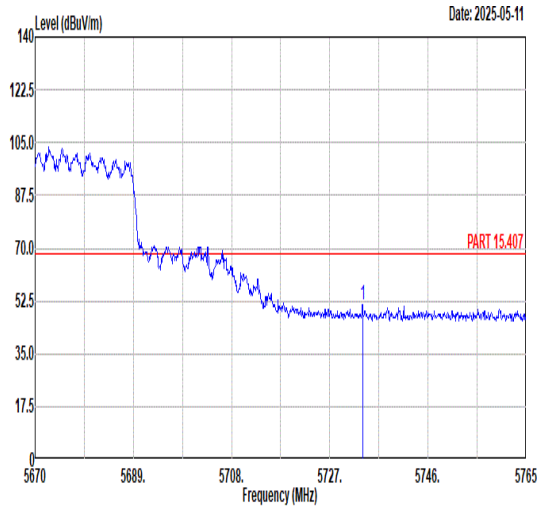 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5733.37 51.31 68.30 -16.99 40.77 34.62 8.71 32.79 100 141 PEAK | Blank |
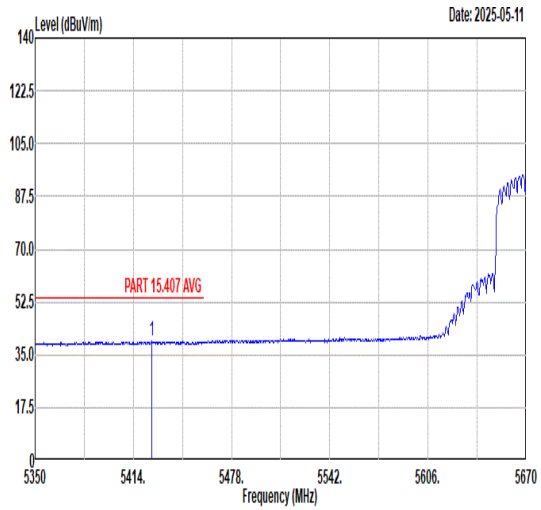
| Mode | 25 | |
|---|---|---|
| | Band Edge - L | |
| | U-NII-2C_5.47-5.725_802.11be EHT40_CH134_Full_5670MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |

**Peak**

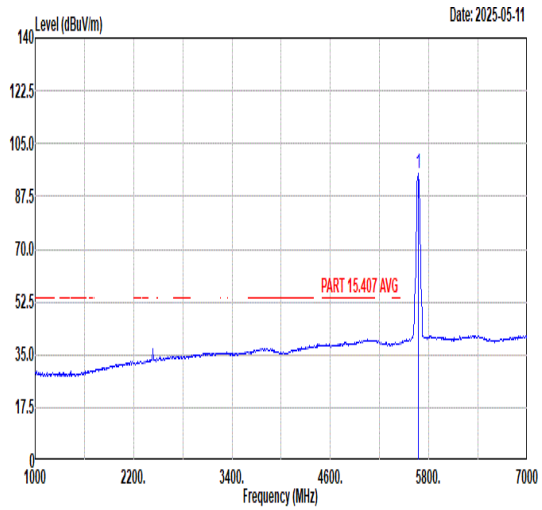


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5404.08 | 48.17 | 74.00 | -25.83 | 38.20 | 34.14 | 8.47 | 32.64 | 224 | 76 | PEAK |
| 2 | 5463.92 | 48.24 | 68.30 | -20.06 | 38.27 | 34.18 | 8.40 | 32.61 | 224 | 76 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5670.00 | 100.64 | ------ | ------ | 90.38 | 34.51 | 8.49 | 32.74 | 224 | 76 | PEAK |

**Avg**

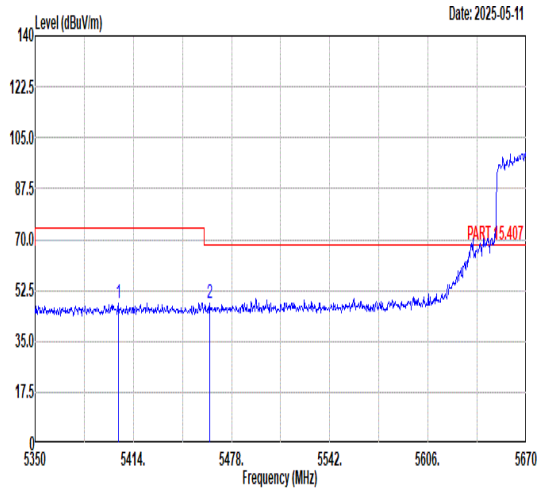


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5407.60 | 39.25 | 54.00 | -14.75 | 29.26 | 34.14 | 8.48 | 32.63 | 224 | 76 | AVERAGE |

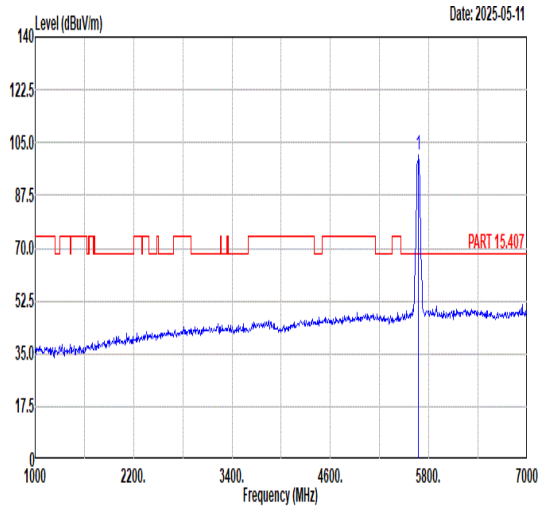


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5670.00 | 92.93 | ------ | ------ | 82.67 | 34.51 | 8.49 | 32.74 | 224 | 76 | AVERAGE |

| Mode | 25 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-2C_5.47-5.725_802.11be EHT40_CH134_Full_5670MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 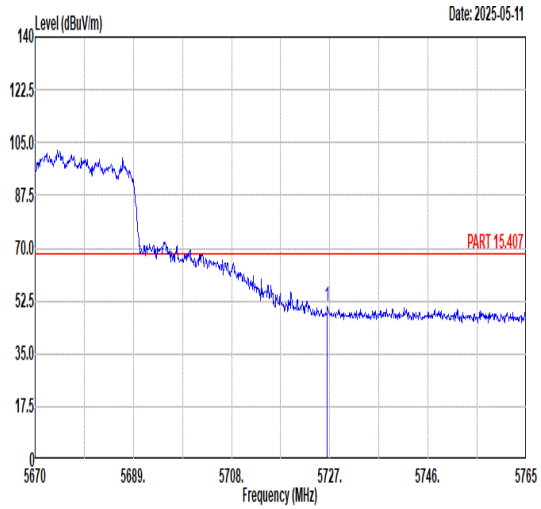 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5726.53 50.65 68.30 -17.65 40.15 34.60 8.68 32.78 224 76 PEAK | Blank |
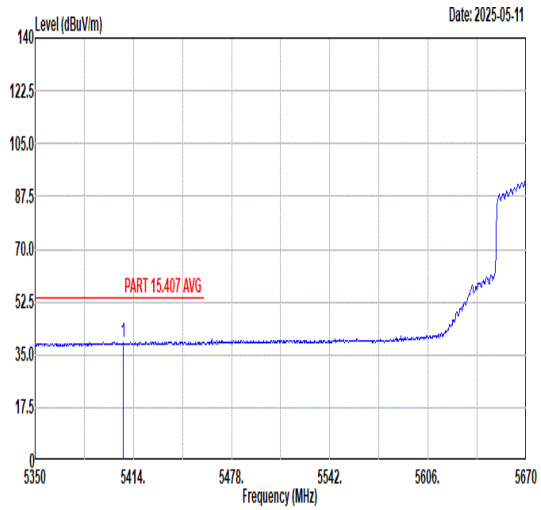
| Mode | 25 | |
|---|---|---|
| | Harmonic | |
| | U-NII-2C_5.47-5.725_802.11be EHT40_CH134_Full_5670MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Vertical |
| Peak<br>Avg | 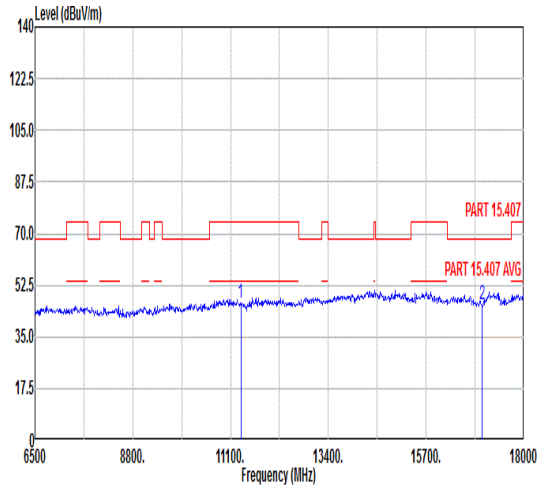 | 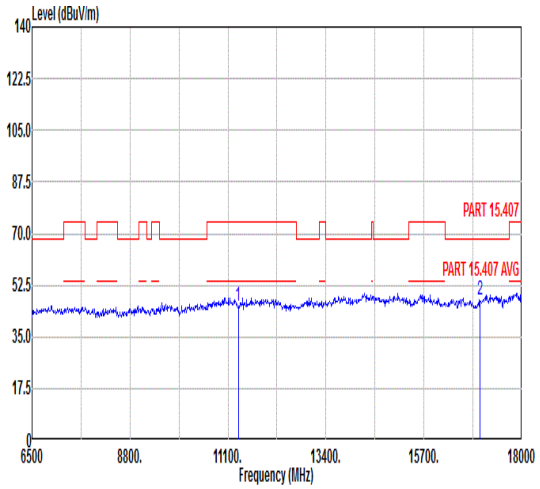 |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 11340.00 | 46.48 | 74.00 | -27.52 | 55.46 | 37.56 | 11.38 | 57.92 | --- | --- | Peak |
| 2 | 17010.00 | 45.82 | 68.30 | -22.48 | 50.15 | 40.83 | 13.12 | 58.28 | --- | --- | Peak |
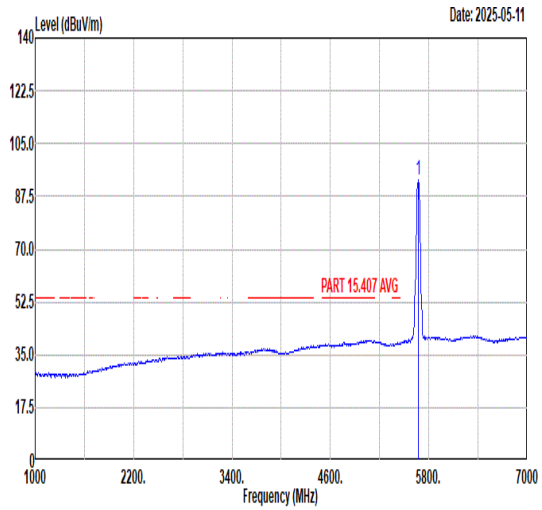
| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 11340.00 | 45.61 | 74.00 | -28.39 | 54.59 | 37.56 | 11.38 | 57.92 | --- | --- | Peak |
| 2 | 17010.00 | 47.68 | 68.30 | -20.62 | 52.01 | 40.83 | 13.12 | 58.28 | --- | --- | Peak |

| Mode | 26 | |
|---|---|---|
| | Band Edge - L | |
| | U-NII-1_5.15-5.25_802.11be EHT80_CH42_Full_5210MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |

**Peak**




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5117.60 | 55.48 | 74.00 | -18.52 | 46.36 | 33.97 | 7.90 | 32.75 | 198 | 140 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5210.00 | 97.14 | ------ | ------ | 87.88 | 34.02 | 7.96 | 32.72 | 198 | 140 | PEAK |

**Avg**

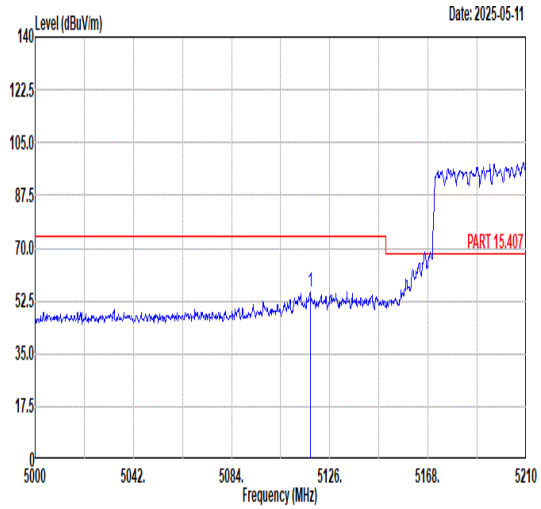


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5117.39 | 50.20 | 54.00 | -3.80 | 41.08 | 33.97 | 7.90 | 32.75 | 198 | 140 | Average |

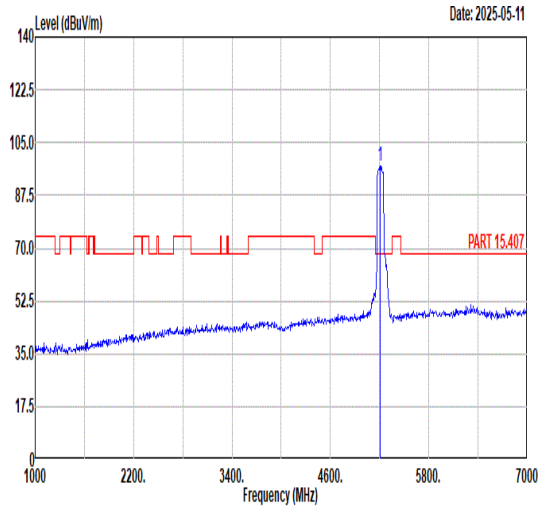


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5210.00 | 91.94 | ------ | ------ | 82.66 | 34.03 | 7.96 | 32.71 | 198 | 140 | AVERAGE |

| Mode | 26 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-1_5.15-5.25_802.11be EHT80_CH42_Full_5210MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 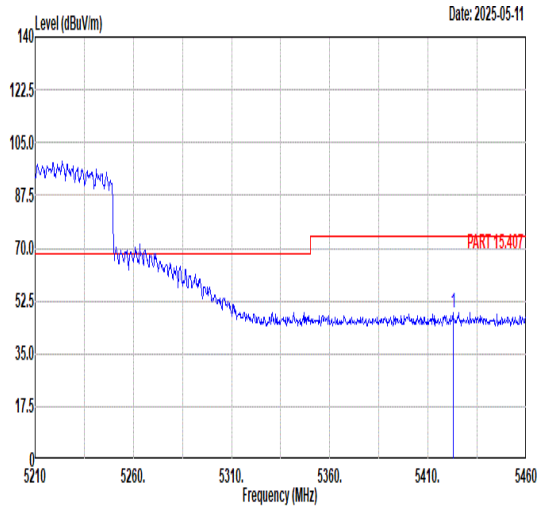 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5422.75 48.83 74.00 -25.17 38.85 34.15 8.46 32.63 198 140 PEAK | Blank |
| Avg | 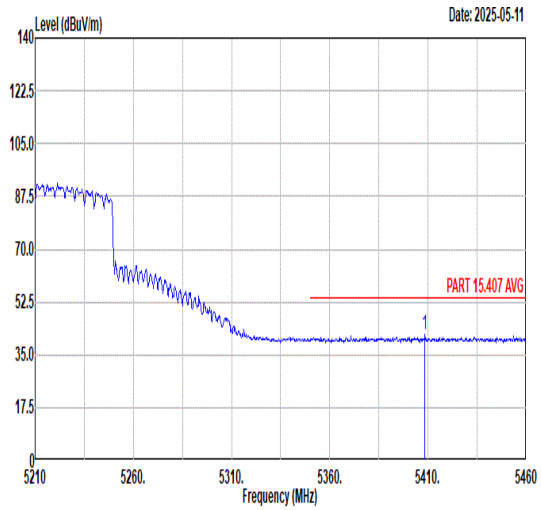 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5408.50 41.48 54.00 -12.52 31.49 34.14 8.48 32.63 198 140 AVERAGE | Blank |
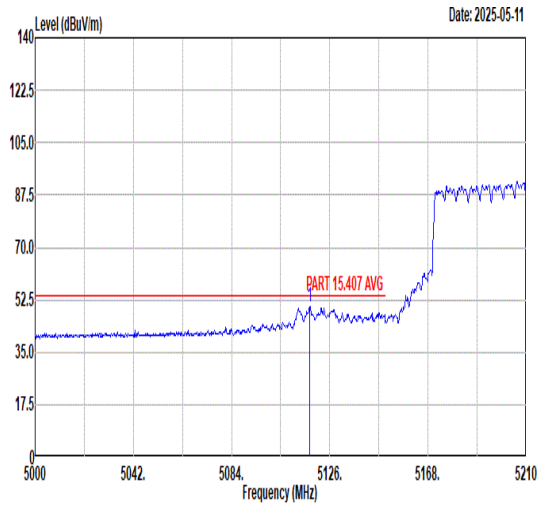
| Mode | 26 | |
|---|---|---|
| | Band Edge - L | |
| | U-NII-1_5.15-5.25_802.11be EHT80_CH42_Full_5210MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 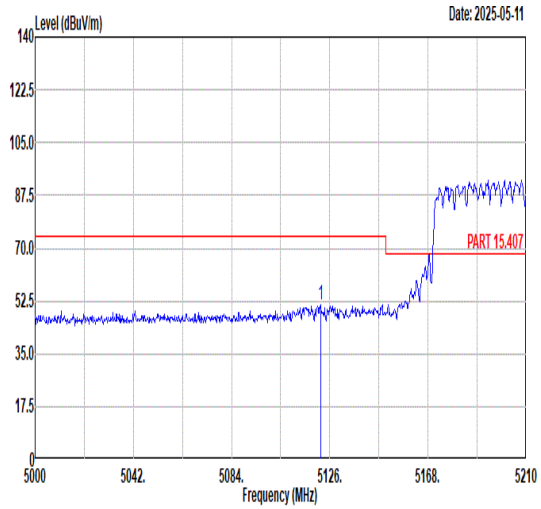 | 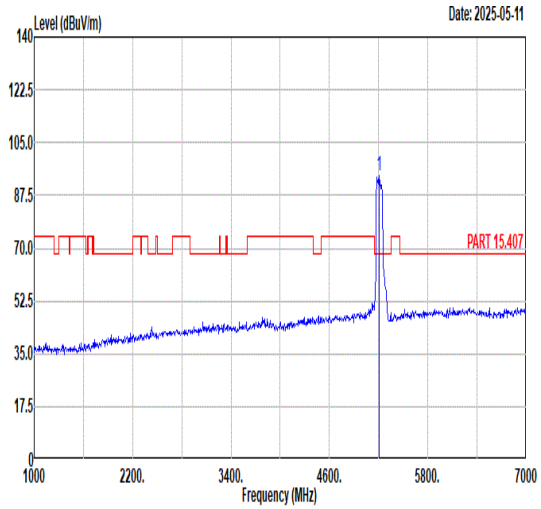 |
| Avg | 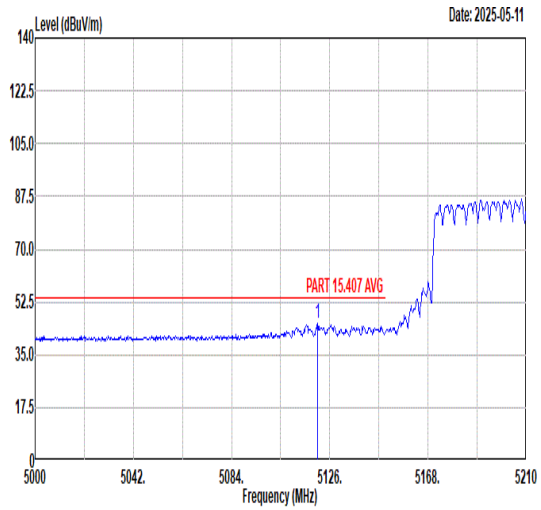 | 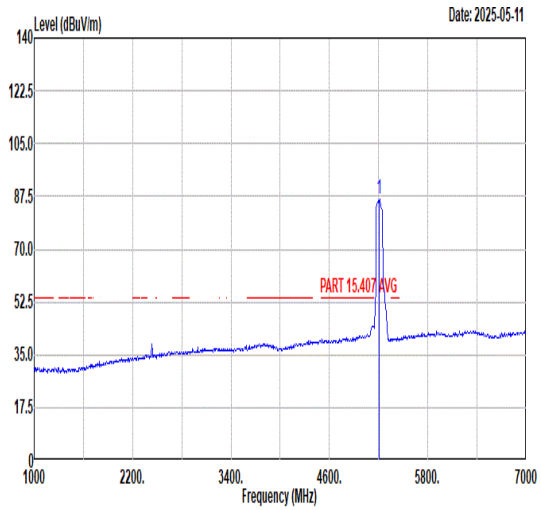 |

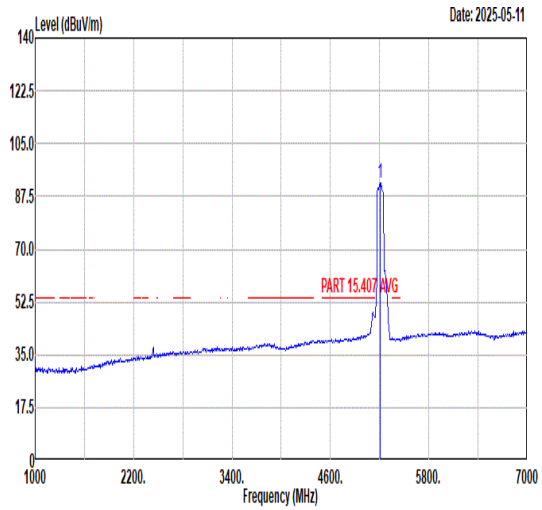

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5122.01 | 51.31 | 74.00 | -22.69 | 42.19 | 33.97 | 7.90 | 32.75 | 176 | 260 | PEAK |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5210.00 | 93.88 | ------ | ------ | 84.62 | 34.02 | 7.96 | 32.72 | 176 | 260 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5120.75 | 45.19 | 54.00 | -8.81 | 36.07 | 33.97 | 7.90 | 32.75 | 176 | 260 | AVERAGE |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5210.00 | 86.60 | ------ | ------ | 77.30 | 34.03 | 7.98 | 32.71 | 176 | 260 | AVERAGE |

| Mode | 26 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-1_5.15-5.25_802.11be EHT80_CH42_Full_5210MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 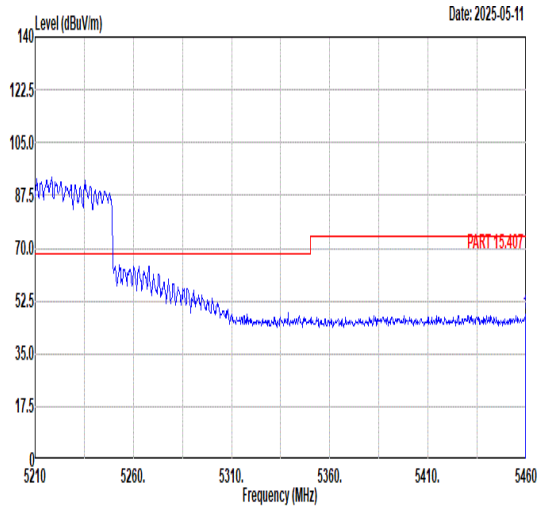 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5459.50 47.90 74.00 -26.10 37.93 34.17 8.41 32.61 176 260 PEAK | Blank |
| Avg | 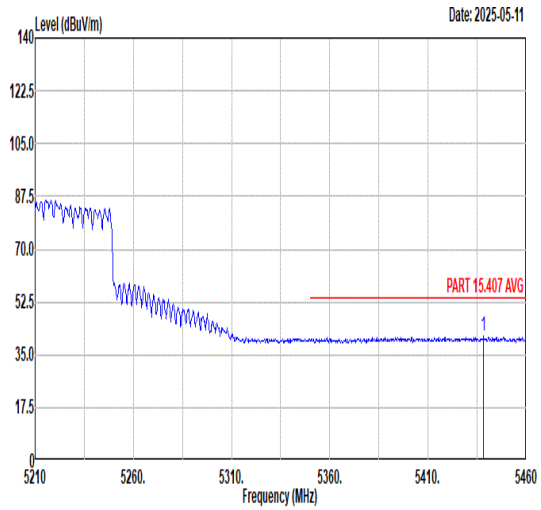 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5438.25 41.11 54.00 -12.89 31.13 34.16 8.44 32.62 176 260 AVERAGE | Blank |

| Mode | 26 | |
|---|---|---|
| | Harmonic | |
| | U-NII-1_5.15-5.25_802.11be EHT80_CH42_Full_5210MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Vertical |
| Peak<br>Avg | 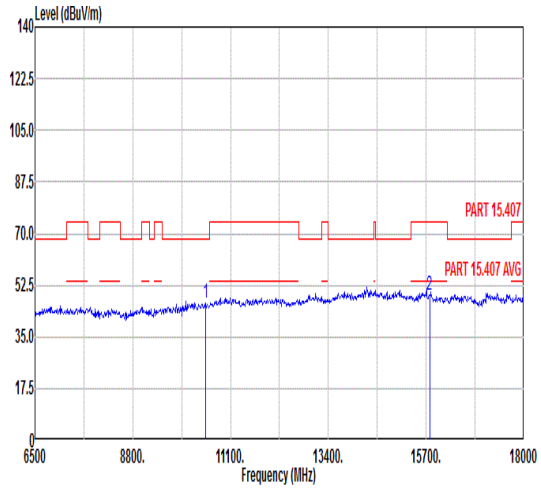 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 10520.00 46.47 68.30 -21.83 56.91 37.53 10.85 58.82 --- --- Peak<br>2 15780.00 49.17 74.00 -24.83 56.13 39.51 12.71 59.18 --- --- Peak | 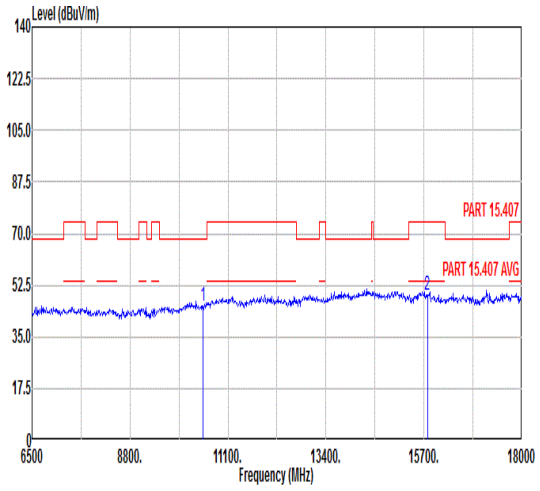 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 10520.00 45.42 68.30 -22.88 55.86 37.53 10.85 58.82 --- --- Peak<br>2 15780.00 49.13 74.00 -24.87 56.09 39.51 12.71 59.18 --- --- Peak |

| Mode | 27 | |
|---|---|---|
| | Band Edge - L | |
| | U-NII-2A_5.25-5.35_802.11be EHT80_CH58_Full_5290MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 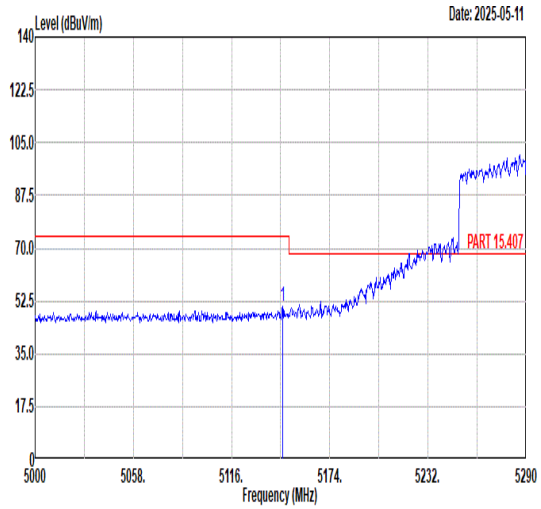 | 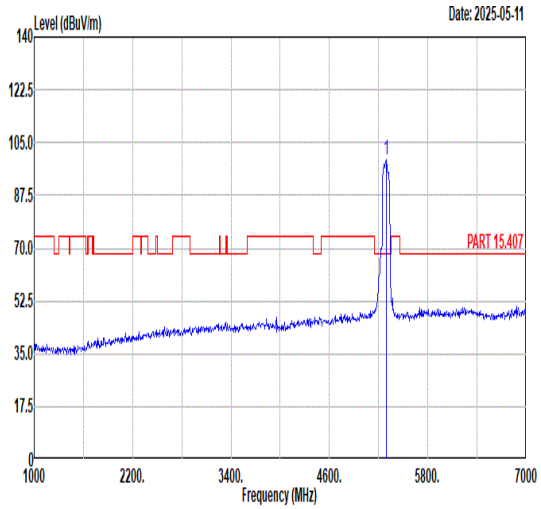 |
| Avg | 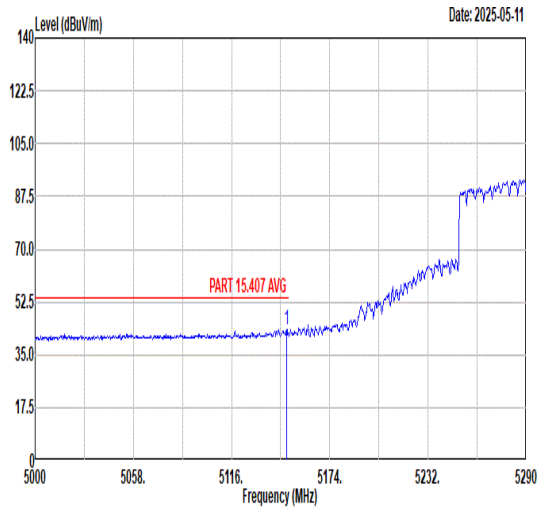 | 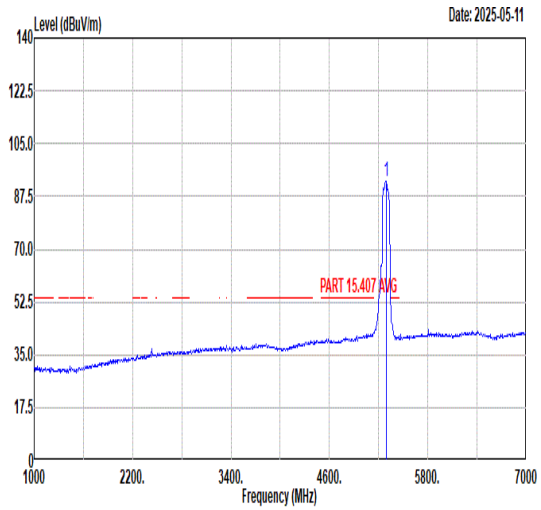 |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5146.16 | 50.95 | 74.00 | -23.05 | 41.78 | 33.99 | 7.92 | 32.74 | 195 | 138 | PEAK |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5290.00 | 99.46 | ------ | ------ | 89.90 | 34.07 | 8.17 | 32.68 | 195 | 138 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5148.48 | 43.37 | 54.00 | -10.63 | 34.20 | 33.99 | 7.92 | 32.74 | 195 | 138 | AVERAGE |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5290.00 | 92.67 | ------ | ------ | 83.11 | 34.07 | 8.17 | 32.68 | 195 | 138 | AVERAGE |

| Mode | 27 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-2A_5.25-5.35_802.11be EHT80_CH58_Full_5290MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 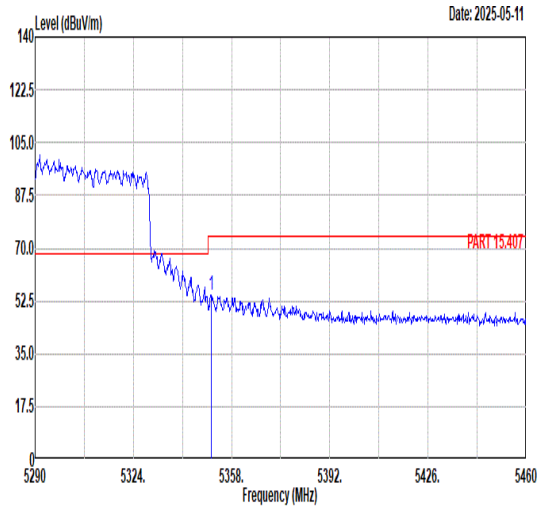 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5350.86 54.65 74.00 -19.35 44.87 34.11 8.33 32.66 195 138 PEAK | Blank |
| Avg | 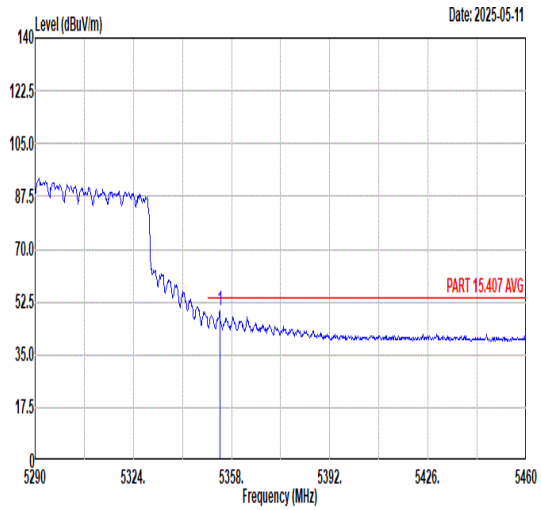 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5353.92 49.71 54.00 -4.29 39.92 34.11 8.34 32.66 195 138 AVERAGE | Blank |

| Mode | 27 | |
|---|---|---|
| | Band Edge - L | |
| | U-NII-2A_5.25-5.35_802.11be EHT80_CH58_Full_5290MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 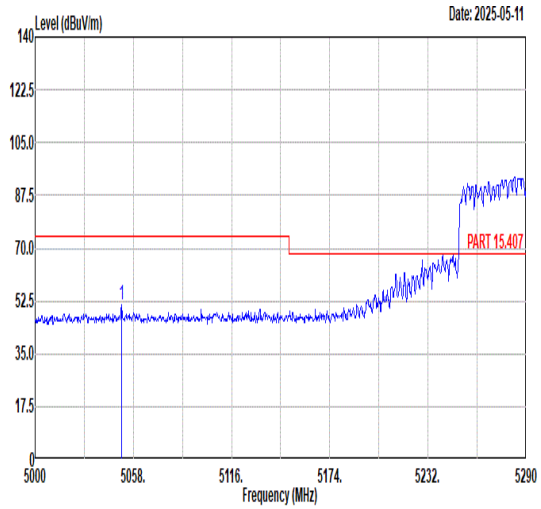 | 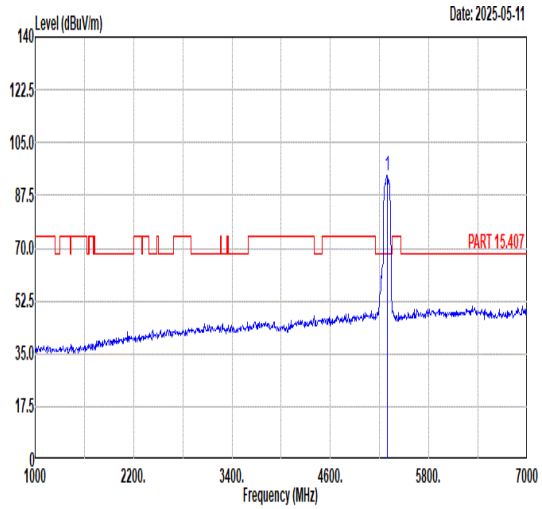 |
| Avg | 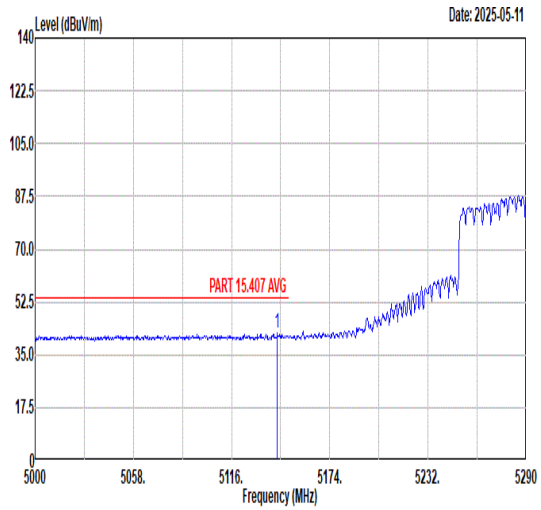 | 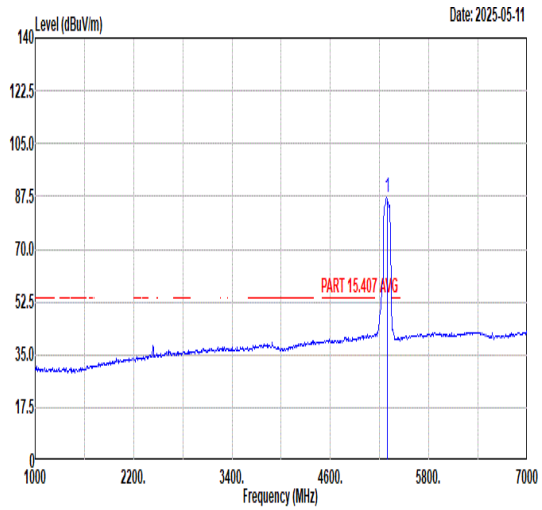 |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5051.04 | 51.16 | 74.00 | -22.84 | 42.16 | 33.93 | 7.85 | 32.78 | 157 | 253 | PEAK |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5290.00 | 94.12 | ------ | ------ | 84.54 | 34.08 | 8.18 | 32.68 | 157 | 253 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5142.97 | 42.20 | 54.00 | -11.80 | 33.04 | 33.99 | 7.91 | 32.74 | 157 | 253 | AVERAGE |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5290.00 | 86.99 | ------ | ------ | 77.45 | 34.07 | 8.15 | 32.68 | 157 | 253 | AVERAGE |

| Mode | 27 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-2A_5.25-5.35_802.11be EHT80_CH58_Full_5290MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 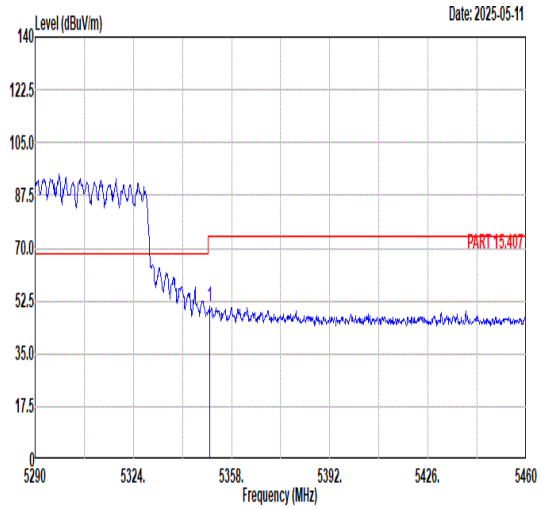 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5350.35 50.50 74.00 -23.50 40.72 34.11 8.33 32.66 157 253 PEAK | Blank |
| Avg | 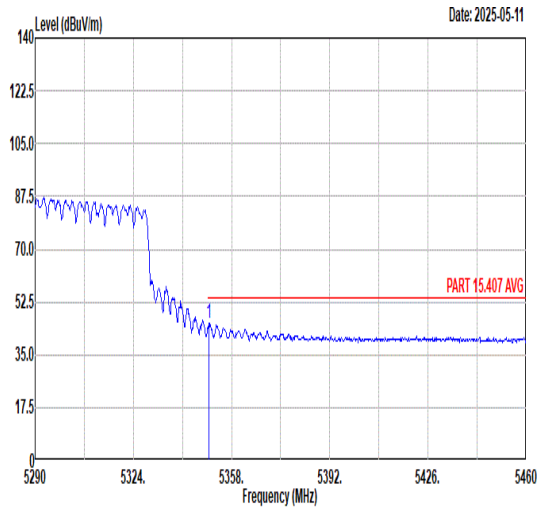 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5350.18 45.35 54.00 -8.65 35.57 34.11 8.33 32.66 157 253 AVERAGE | Blank |

| Mode | 27 | |
|---|---|---|
| | Harmonic | |
| | U-NII-2A_5.25-5.35_802.11be EHT80_CH58_Full_5290MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Vertical |
| Peak<br>Avg | 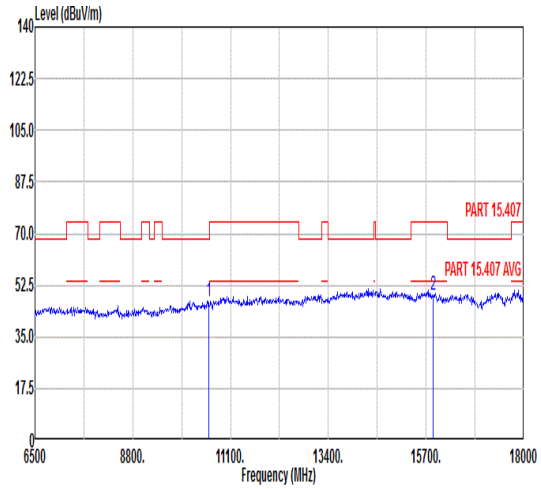 | 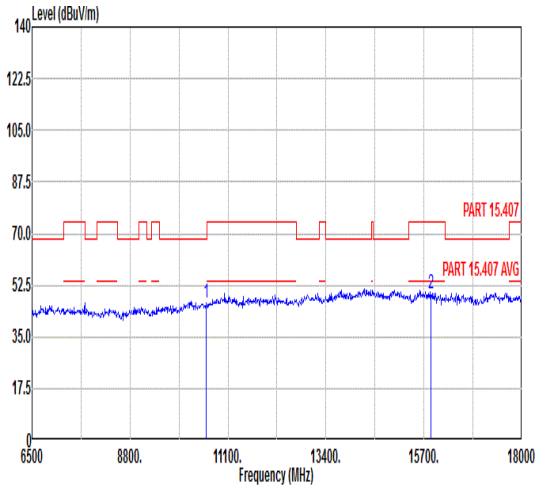 |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 10580.00 | 46.79 | 68.30 | -21.51 | 57.00 | 37.66 | 10.89 | 58.76 | --- | --- | Peak |
| 2 | 15870.00 | 49.37 | 74.00 | -24.63 | 56.38 | 39.55 | 12.71 | 59.27 | --- | --- | Peak |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 10580.00 | 46.35 | 68.30 | -21.95 | 56.56 | 37.66 | 10.89 | 58.76 | --- | --- | Peak |
| 2 | 15870.00 | 49.71 | 74.00 | -24.29 | 56.72 | 39.55 | 12.71 | 59.27 | --- | --- | Peak |

| Mode | 28 | |
|---|---|---|
| | Band Edge - L | |
| | U-NII-2C_5.47-5.725_802.11be EHT80_CH106_Full_5530MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |

**Peak**




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5431.54 | 51.38 | 74.00 | -22.62 | 41.39 | 34.16 | 8.45 | 32.62 | 158 | 132 | PEAK |
| 2 | 5468.26 | 52.53 | 68.30 | -15.77 | 42.56 | 34.18 | 8.40 | 32.61 | 158 | 132 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5530.00 | 100.03 | ------ | ------ | 90.10 | 34.30 | 8.28 | 32.65 | 158 | 132 | PEAK |

**Avg**

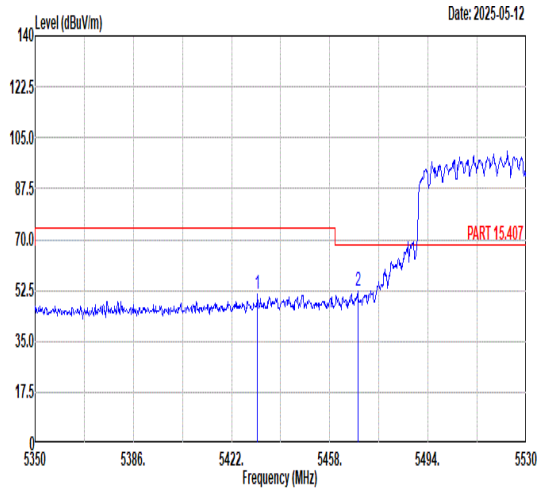


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5445.58 | 44.99 | 54.00 | -9.01 | 35.01 | 34.17 | 8.43 | 32.62 | 158 | 132 | AVERAGE |

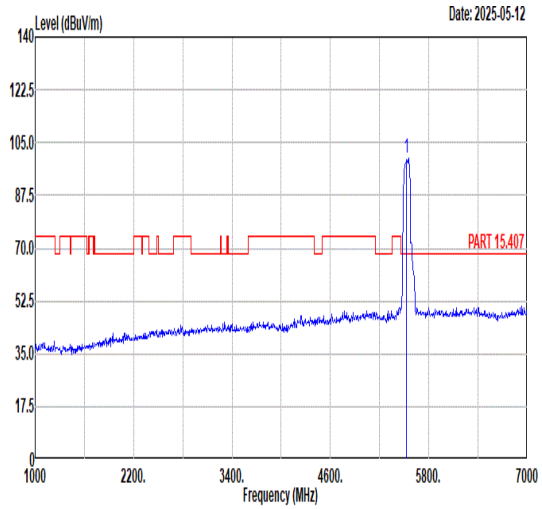


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5530.00 | 92.55 | ------ | ------ | 82.62 | 34.23 | 8.32 | 32.62 | 158 | 132 | AVERAGE |

<table>
<tr><td rowspan="3">Mode</td><td colspan="2">28</td></tr>
<tr><td colspan="2">Band Edge - R</td></tr>
<tr><td colspan="2">U-NII-2C_5.47-5.725_802.11be EHT80_CH106_Full_5530MHz</td></tr>
<tr><td>ANT</td><td colspan="2">CDD 6+17</td></tr>
<tr><td>Pol.</td><td>Horizontal</td><td>Fundamental</td></tr>
<tr><td>Peak</td><td> 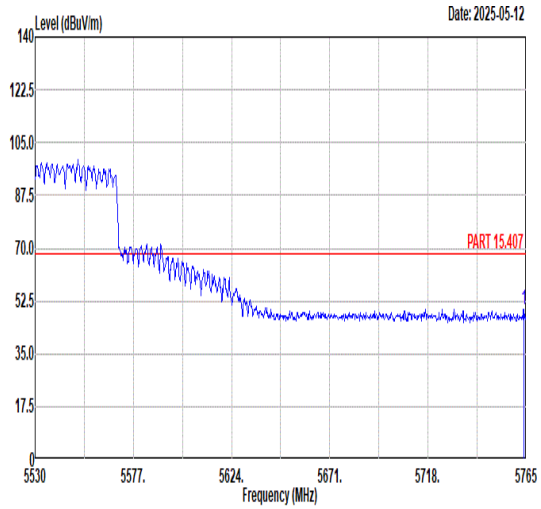

<table>
<tr><th></th><th>Freq</th><th>Level</th><th>Limit Line</th><th>Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr>
<tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td><td></td></tr>
<tr><td>1</td><td>5763.83</td><td>49.50</td><td>68.30</td><td>-18.80</td><td>38.82</td><td>34.67</td><td>8.82</td><td>32.81</td><td>158</td><td>132</td><td>PEAK</td></tr>
</table></td><td>Blank</td></tr>
</table>
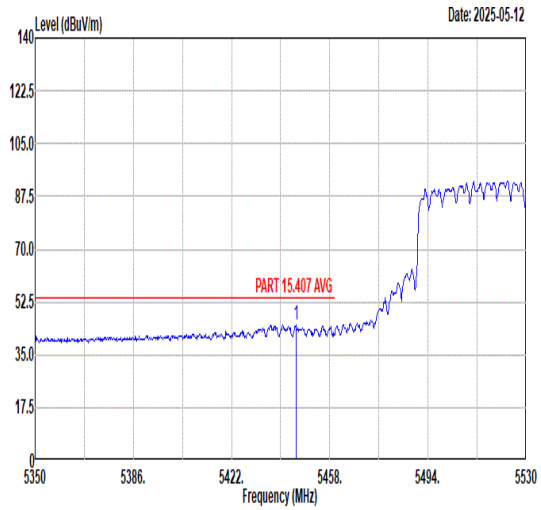
| Mode | 28 | |
|---|---|---|
| | Band Edge - L | |
| | U-NII-2C_5.47-5.725_802.11be EHT80_CH106_Full_5530MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |

**Peak**

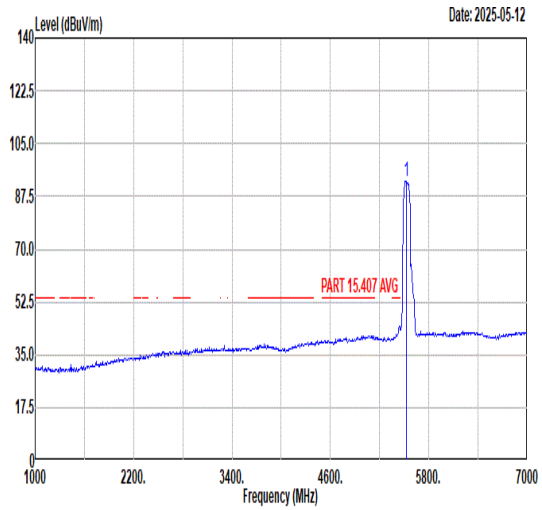


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5446.12 | 49.51 | 74.00 | -24.49 | 39.53 | 34.17 | 8.43 | 32.62 | 148 | 232 | PEAK |
| 2 | 5465.38 | 49.25 | 68.30 | -19.05 | 39.28 | 34.18 | 8.40 | 32.61 | 148 | 232 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5530.00 | 97.60 | ------ | ------ | 87.67 | 34.23 | 8.32 | 32.62 | 148 | 232 | PEAK |

**Avg**

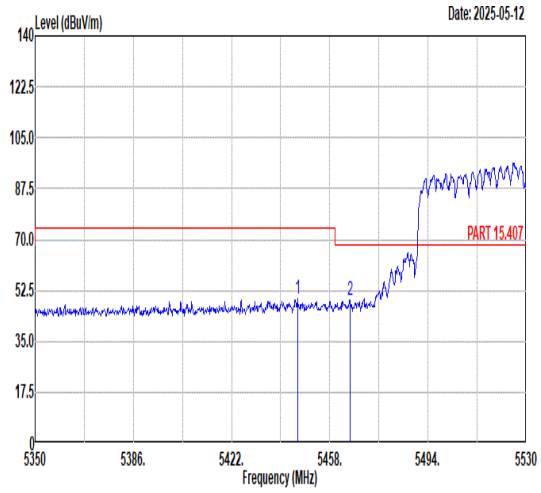


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5457.64 | 42.81 | 54.00 | -11.19 | 32.84 | 34.17 | 8.41 | 32.61 | 148 | 232 | AVERAGE |

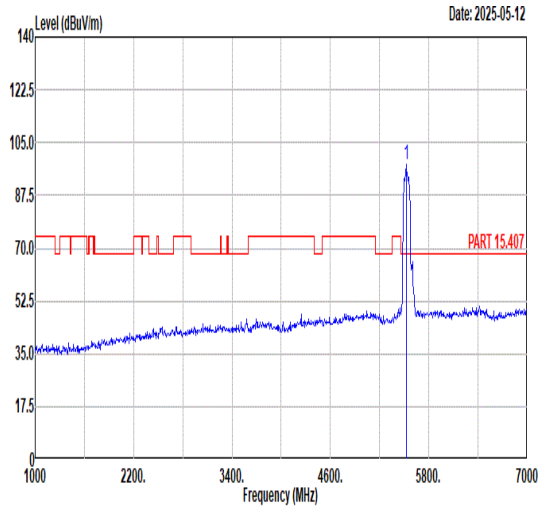


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5530.00 | 89.12 | ------ | ------ | 79.18 | 34.25 | 8.32 | 32.63 | 148 | 232 | AVERAGE |

| Mode | 28 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-2C_5.47-5.725_802.11be EHT80_CH106_Full_5530MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 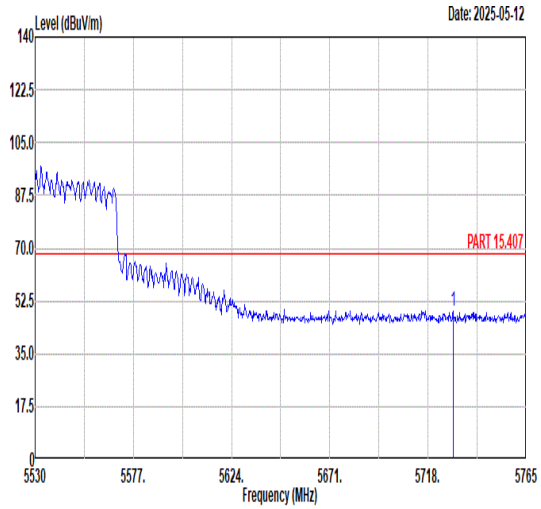 | Blank |

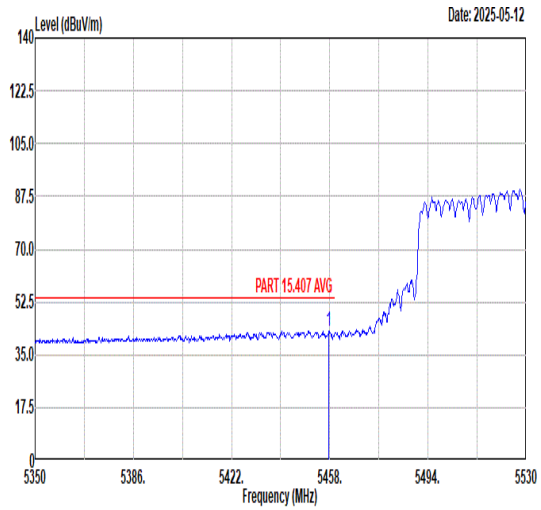

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5729.99 | 49.29 | 68.30 | -19.01 | 38.77 | 34.61 | 8.69 | 32.78 | 148 | 232 | PEAK |
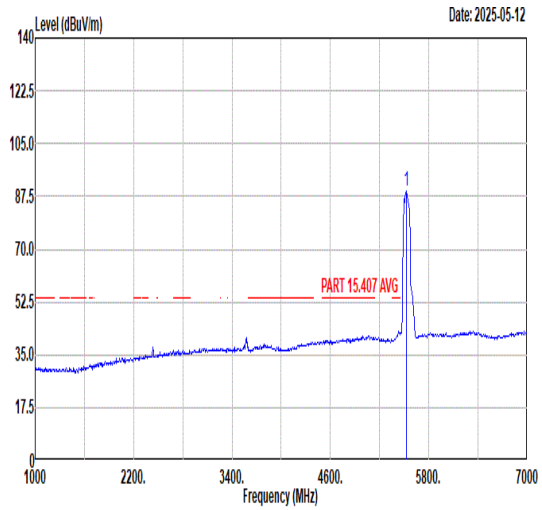
| Mode | 28 | |
|---|---|---|
| | Harmonic | |
| | U-NII-2C_5.47-5.725_802.11be EHT80_CH106_Full_5530MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Vertical |
| Peak<br>Avg | 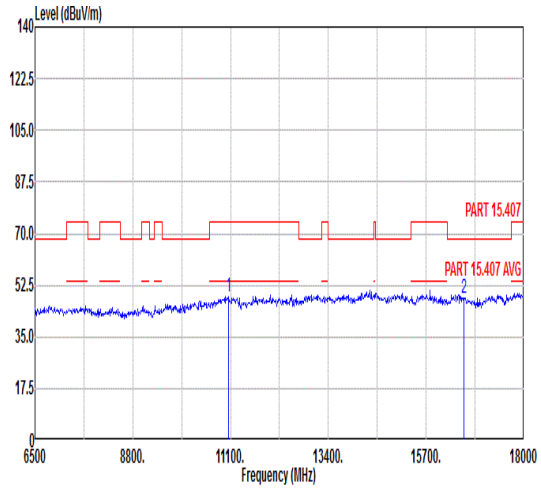 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 11060.00 48.55 74.00 -25.45 57.22 38.32 11.24 58.23 --- --- Peak<br>2 16590.00 48.24 68.30 -20.06 53.57 40.47 12.95 58.75 --- --- Peak | 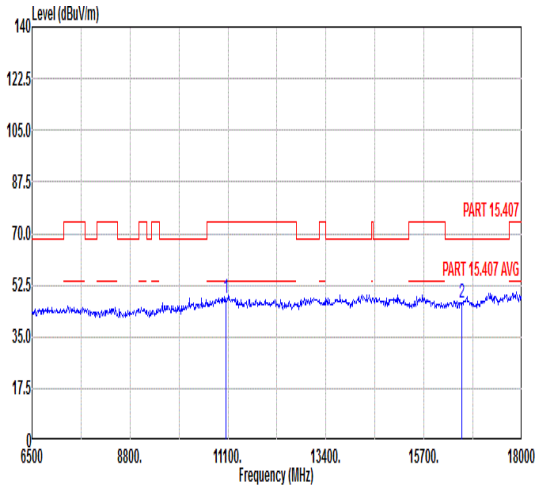 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 11060.00 48.08 74.00 -25.92 56.75 38.32 11.24 58.23 --- --- Peak<br>2 16590.00 46.48 68.30 -21.82 51.81 40.47 12.95 58.75 --- --- Peak |

| Mode | 29 | |
|---|---|---|
| | Band Edge - L | |
| | U-NII-2C_5.47-5.725_802.11be EHT80_CH122_Full_5610MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |

**Peak**




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5446.46 | 48.38 | 74.00 | -25.62 | 38.40 | 34.17 | 8.43 | 32.62 | 161 | 132 | PEAK |
| 2 | 5466.48 | 47.29 | 68.30 | -21.01 | 37.32 | 34.18 | 8.40 | 32.61 | 161 | 132 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5610.00 | 100.25 | ------ | ------ | 90.25 | 34.41 | 8.29 | 32.70 | 161 | 132 | PEAK |

**Avg**

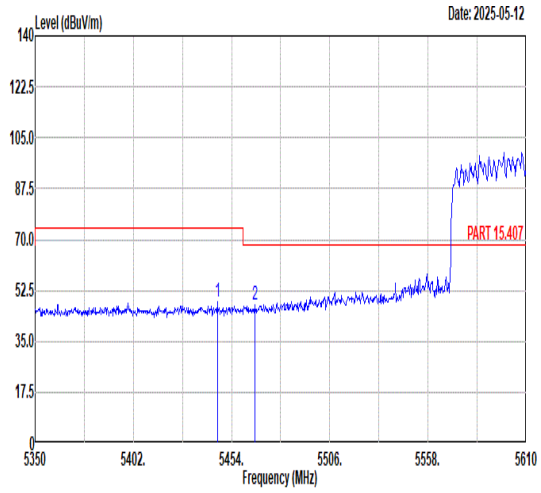


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5437.62 | 41.29 | 54.00 | -12.71 | 31.31 | 34.16 | 8.44 | 32.62 | 161 | 132 | AVERAGE |

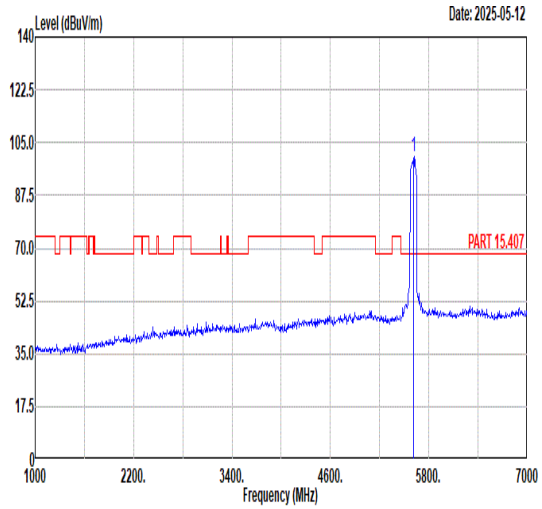


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5610.00 | 91.83 | ------ | ------ | 81.86 | 34.40 | 8.26 | 32.69 | 161 | 132 | AVERAGE |

| Mode | 29 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-2C_5.47-5.725_802.11be EHT80_CH122_Full_5610MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 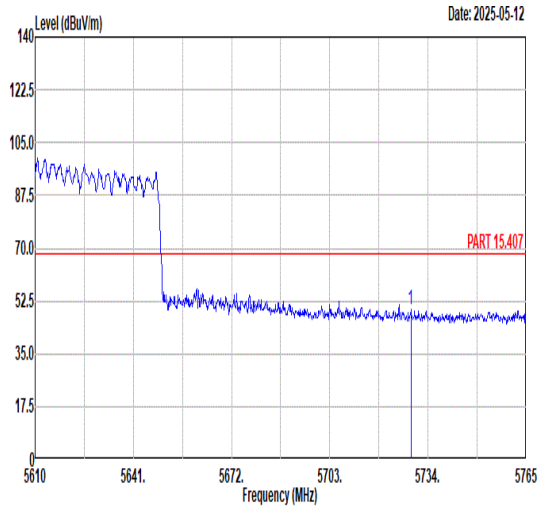 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5728.58 49.57 68.30 -18.73 39.05 34.61 8.69 32.78 161 132 PEAK | Blank |
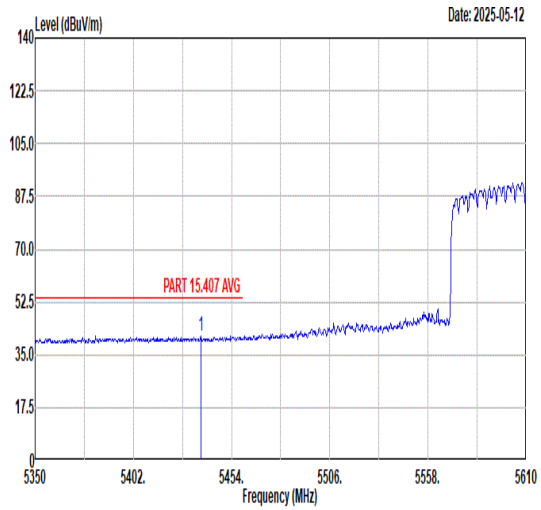
| Mode | 29 | |
|---|---|---|
| | Band Edge - L | |
| | U-NII-2C_5.47-5.725_802.11be EHT80_CH122_Full_5610MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |

**Peak**

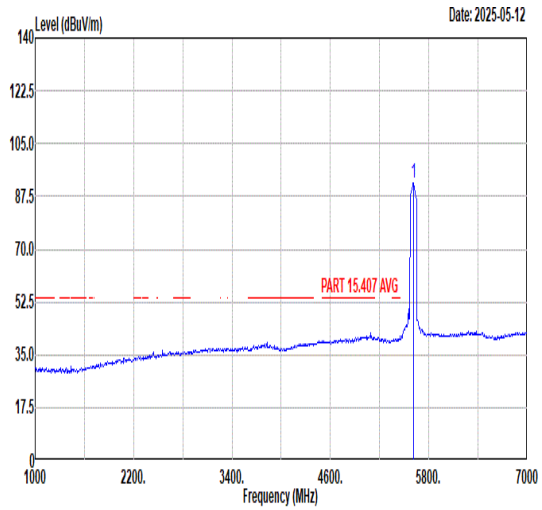


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5378.86 | 48.61 | 74.00 | -25.39 | 38.73 | 34.13 | 8.40 | 32.65 | 148 | 253 | PEAK |
| 2 | 5469.86 | 47.32 | 68.30 | -20.98 | 37.35 | 34.18 | 8.40 | 32.61 | 148 | 253 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5610.00 | 95.76 | ------ | ------ | 85.82 | 34.39 | 8.24 | 32.69 | 148 | 253 | PEAK |

**Avg**

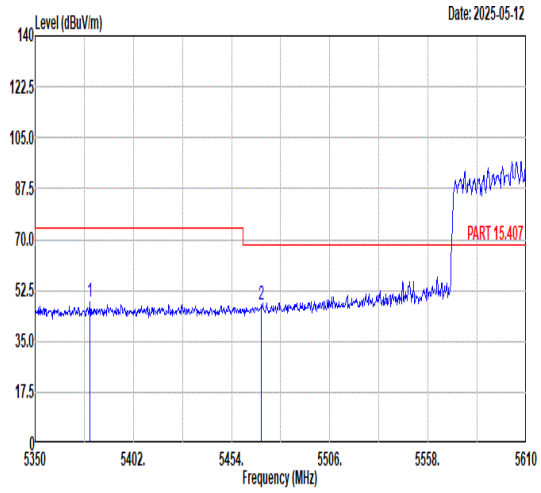


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5420.72 | 41.14 | 54.00 | -12.86 | 31.16 | 34.15 | 8.46 | 32.63 | 148 | 253 | AVERAGE |

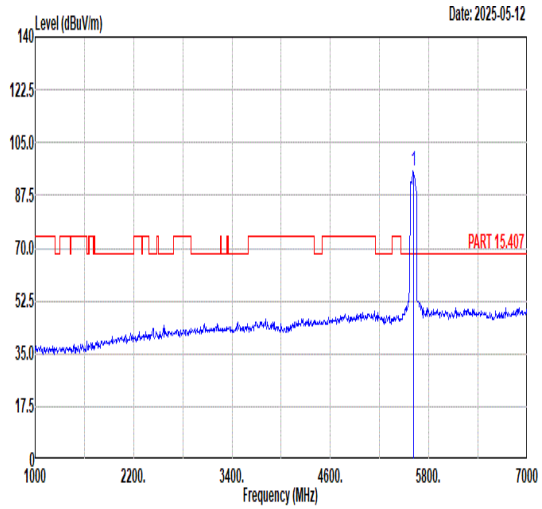


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5610.00 | 88.30 | ------ | ------ | 78.36 | 34.39 | 8.24 | 32.69 | 148 | 253 | AVERAGE |

| Mode | 29 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-2C_5.47-5.725_802.11be EHT80_CH122_Full_5610MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 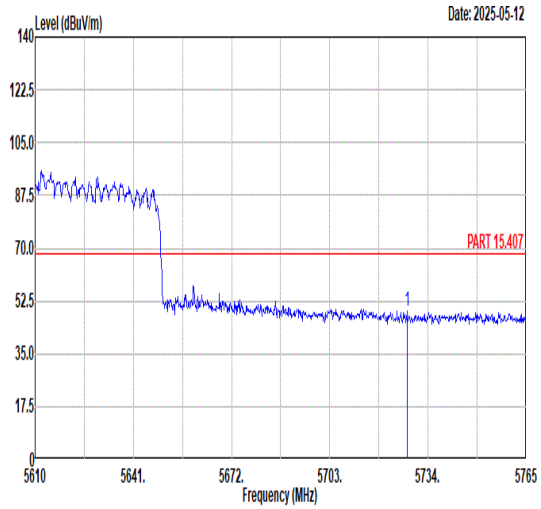 | Blank |

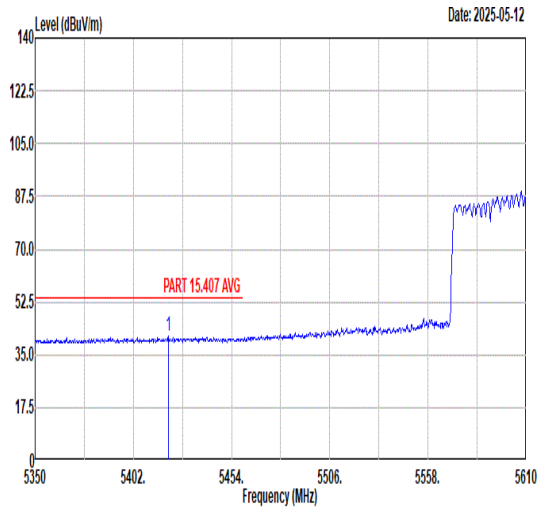

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5727.34 | 49.06 | 68.30 | -19.24 | 38.55 | 34.61 | 8.68 | 32.78 | 148 | 253 | PEAK |
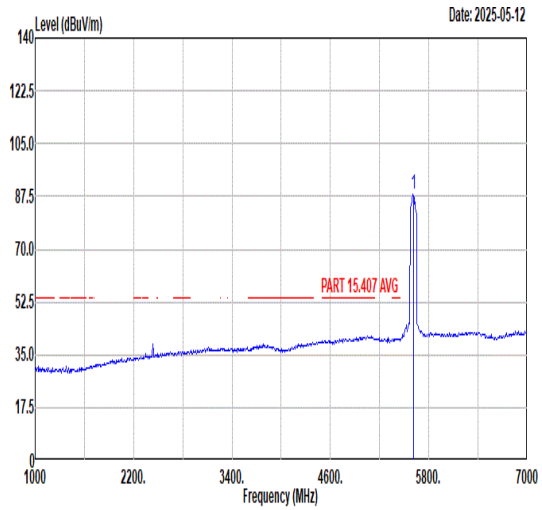
| Mode | 29 | |
|---|---|---|
| | Harmonic | |
| | U-NII-2C_5.47-5.725_802.11be EHT80_CH122_Full_5610MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Vertical |
| Peak<br>Avg | 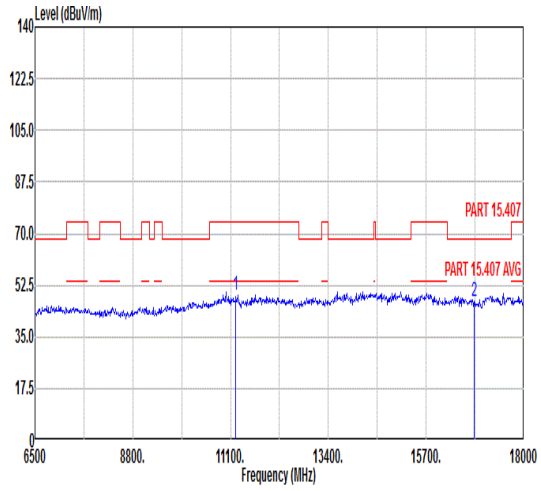 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 11220.00 49.01 74.00 -24.99 57.85 37.89 11.32 58.05 --- --- Peak<br>2 16830.00 47.26 68.30 -21.04 52.03 40.66 13.05 58.48 --- --- Peak | 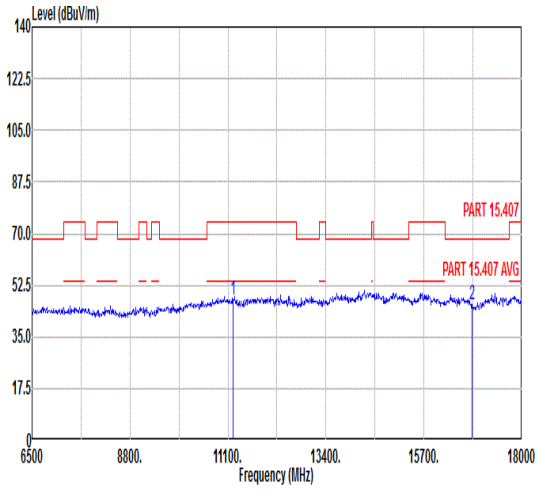 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 11220.00 47.38 74.00 -26.62 56.22 37.89 11.32 58.05 --- --- Peak<br>2 16830.00 45.70 68.30 -22.60 50.47 40.66 13.05 58.48 --- --- Peak |

| Mode | 30 | |
|---|---|---|
| | Band Edge - L | |
| | U-NII-1_5.15-5.35_802.11be EHT160_CH50_Full_5250MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 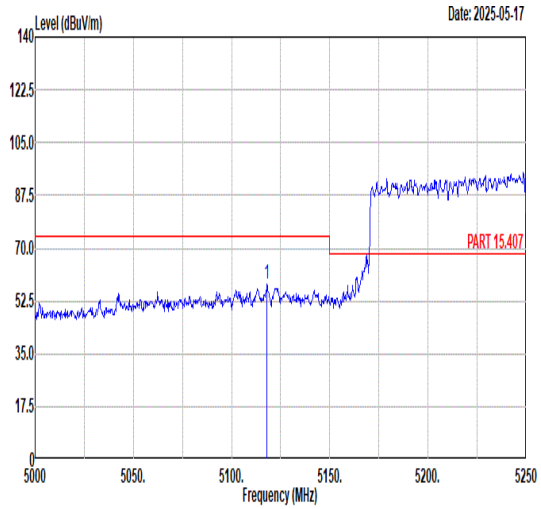 | 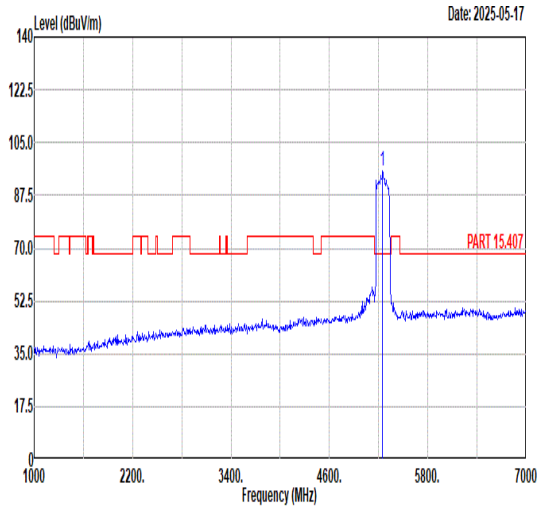 |
| Avg | 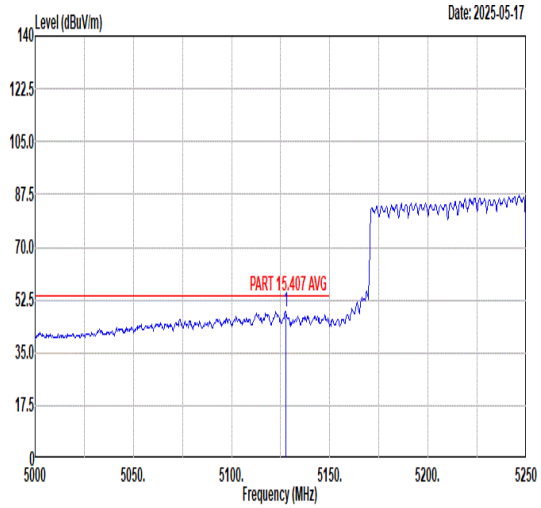 | 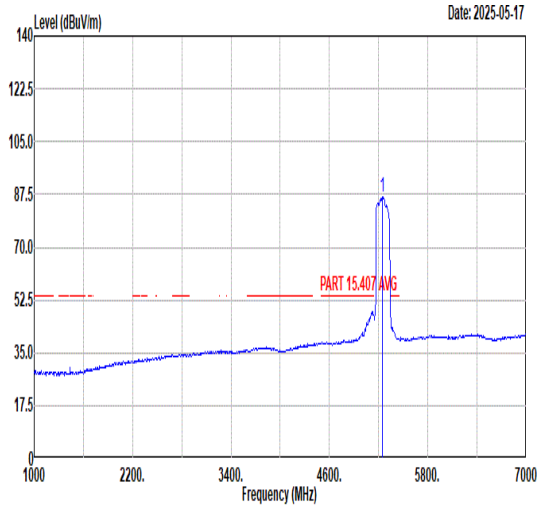 |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5118.00 | 57.90 | 74.00 | -16.10 | 48.78 | 33.97 | 7.90 | 32.75 | 186 | 129 | PEAK |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5250.00 | 95.61 | ------ | ------ | 86.20 | 34.05 | 8.06 | 32.70 | 186 | 129 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5127.50 | 48.75 | 54.00 | -5.25 | 39.62 | 33.98 | 7.90 | 32.75 | 186 | 129 | AVERAGE |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5250.00 | 86.57 | ------ | ------ | 77.16 | 34.05 | 8.06 | 32.70 | 186 | 129 | AVERAGE |

| Mode | 30 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-1_5.15-5.35_802.11be EHT160_CH50_Full_5250MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 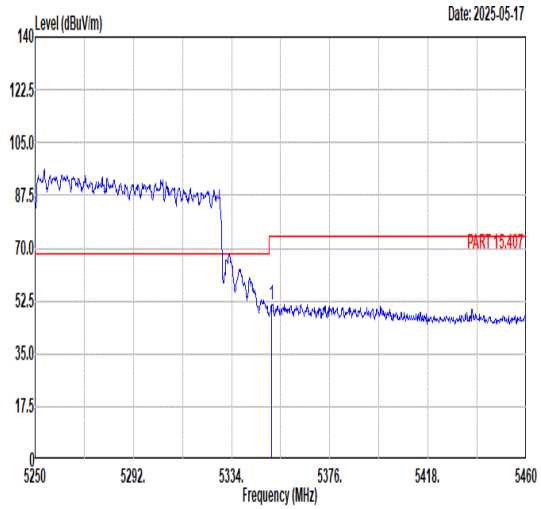 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5351.22 51.35 74.00 -22.65 41.57 34.11 8.33 32.66 186 129 PEAK | Blank |
| Avg | 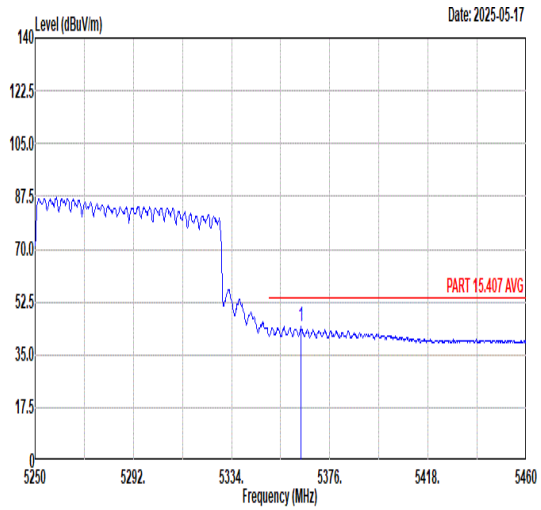 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5363.82 44.21 54.00 -9.79 34.38 34.12 8.36 32.65 186 129 AVERAGE | Blank |

| Mode | 30 | |
|---|---|---|
| | Band Edge - L | |
| | U-NII-1_5.15-5.35_802.11be EHT160_CH50_Full_5250MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 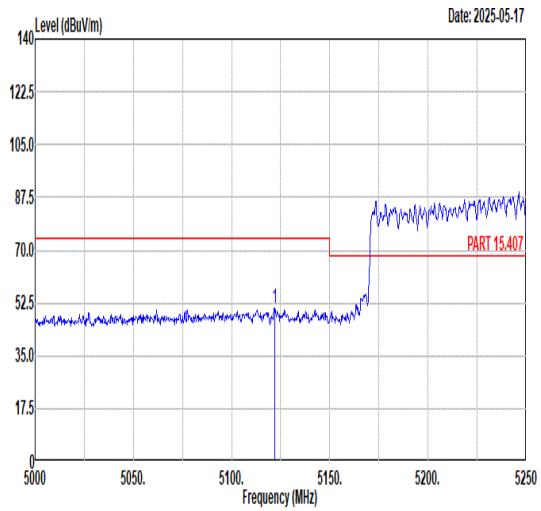 | 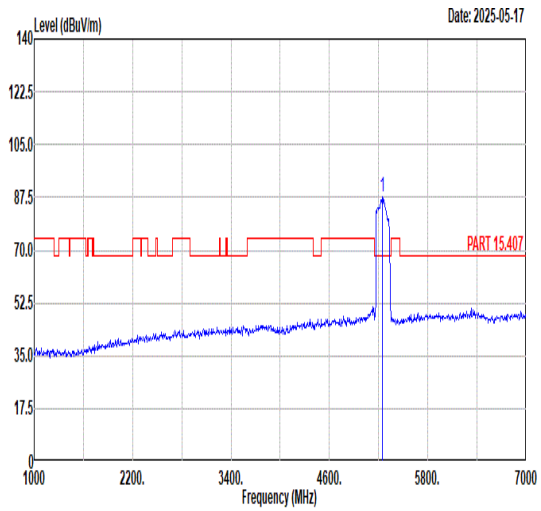 |
| Avg | 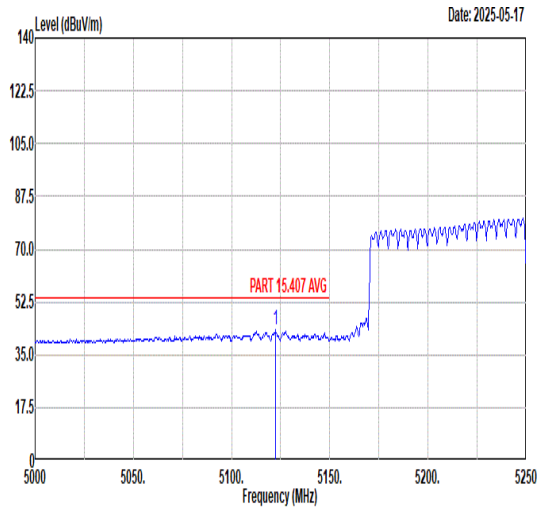 | 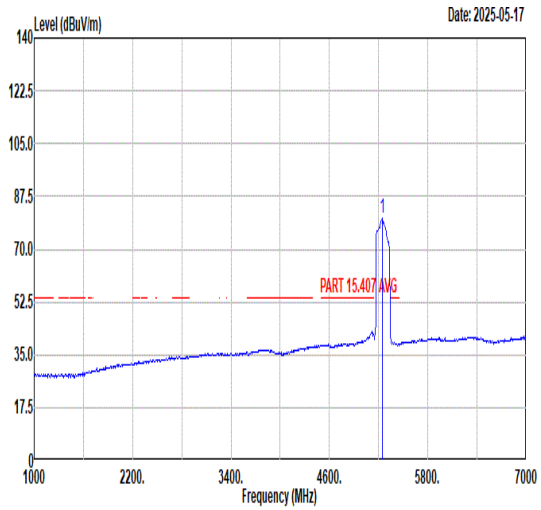 |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5122.00 | 50.95 | 74.00 | -23.05 | 41.83 | 33.97 | 7.90 | 32.75 | 343 | 287 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5250.00 | 87.79 | ------ | ------ | 78.40 | 34.05 | 8.04 | 32.70 | 343 | 287 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5122.50 | 43.36 | 54.00 | -10.64 | 34.24 | 33.97 | 7.90 | 32.75 | 343 | 287 | AVERAGE |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5250.00 | 80.30 | ------ | ------ | 70.89 | 34.05 | 8.06 | 32.70 | 343 | 287 | AVERAGE |

| Mode | 30 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-1_5.15-5.35_802.11be EHT160_CH50_Full_5250MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 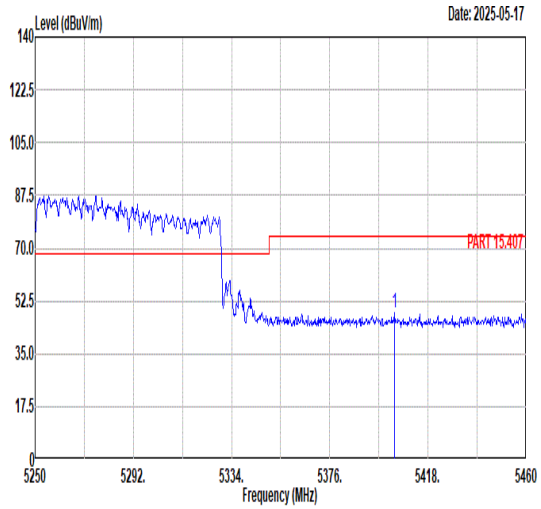 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5403.72 48.63 74.00 -25.37 38.66 34.14 8.47 32.64 343 287 PEAK | Blank |
| Avg | 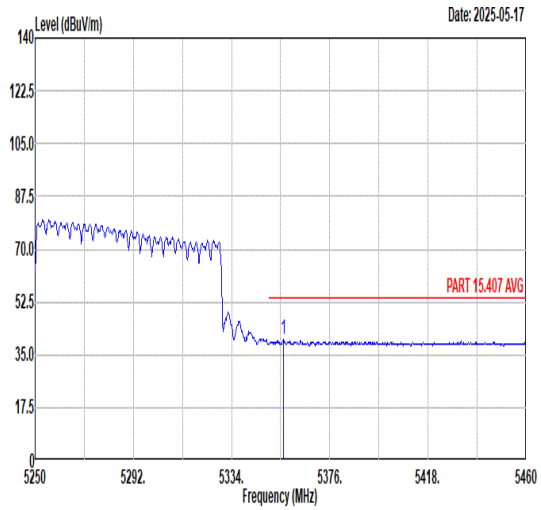 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5356.05 39.90 54.00 -14.10 30.11 34.11 8.34 32.66 343 287 AVERAGE | Blank |

| Mode | 30 | |
|---|---|---|
| | Harmonic | |
| | U-NII-1_5.15-5.35_802.11be EHT160_CH50_Full_5250MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Vertical |
| Peak<br>Avg | 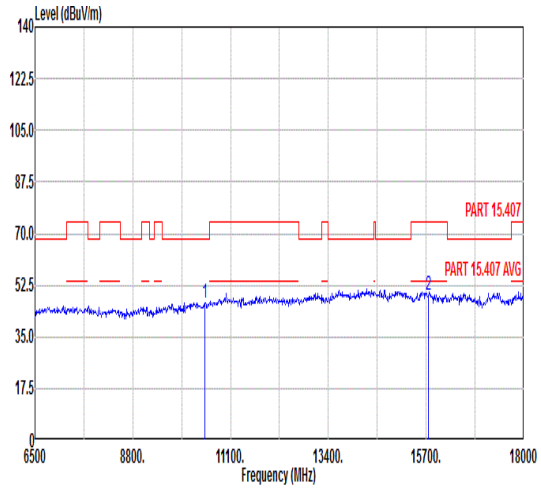 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 10500.00 46.63 68.30 -21.67 57.15 37.49 10.83 58.84 --- --- Peak<br>2 15750.00 49.38 74.00 -24.62 56.32 39.50 12.71 59.15 --- --- Peak | 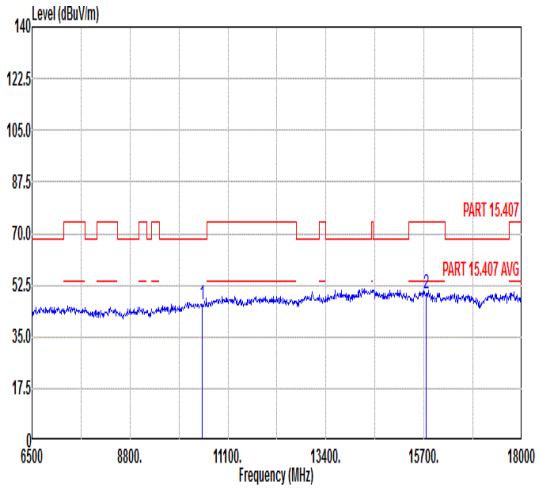 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 10500.00 45.80 68.30 -22.50 56.32 37.49 10.83 58.84 --- --- Peak<br>2 15750.00 49.62 74.00 -24.38 56.56 39.50 12.71 59.15 --- --- Peak |

| Mode | 31 |
|---|---|
| | Band Edge - L |
| | U-NII-2C_5.47-5.725_802.11be EHT160_CH114_Full_5570MHz |
| ANT | CDD 6+17 |

| Pol. | Horizontal | Fundamental |
|---|---|---|

**Peak**




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5434.04 | 51.12 | 74.00 | -22.88 | 41.14 | 34.16 | 8.44 | 32.62 | 311 | 134 | PEAK |
| 2 | 5468.80 | 48.76 | 68.30 | -19.54 | 38.79 | 34.18 | 8.40 | 32.61 | 311 | 134 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5570.00 | 92.88 | ------ | ------ | 82.95 | 34.30 | 8.28 | 32.65 | 311 | 134 | PEAK |

**Avg**

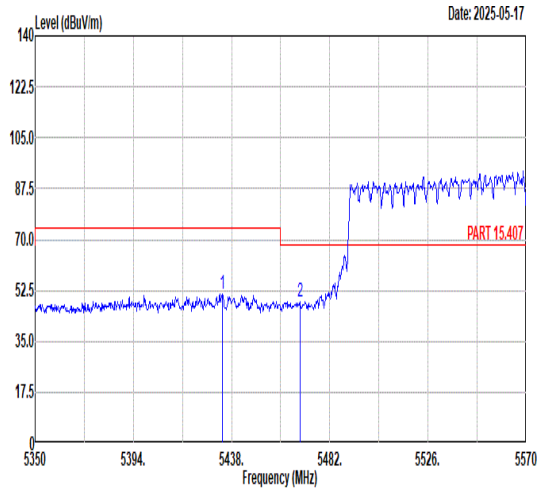


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5433.38 | 43.38 | 54.00 | -10.62 | 33.40 | 34.16 | 8.44 | 32.62 | 311 | 134 | AVERAGE |

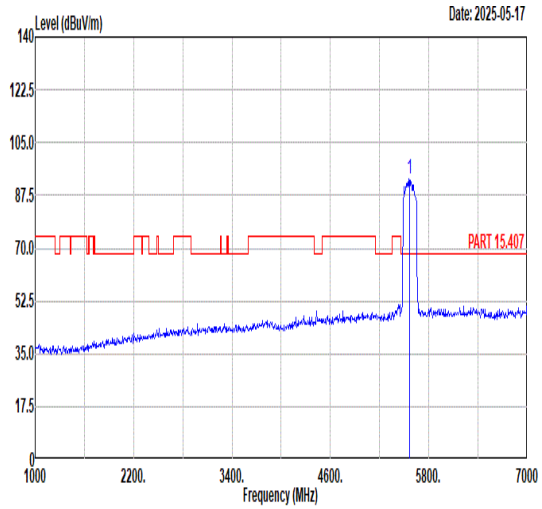


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5570.00 | 84.61 | ------ | ------ | 74.69 | 34.31 | 8.27 | 32.66 | 311 | 134 | AVERAGE |

| Mode | 31 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-2C_5.47-5.725_802.11be EHT160_CH114_Full_5570MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 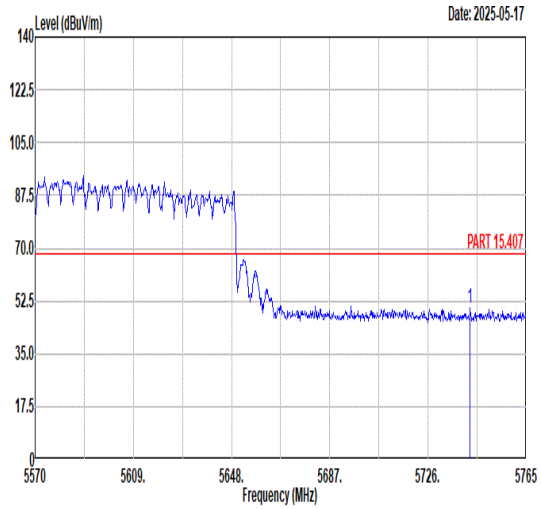 | Blank |

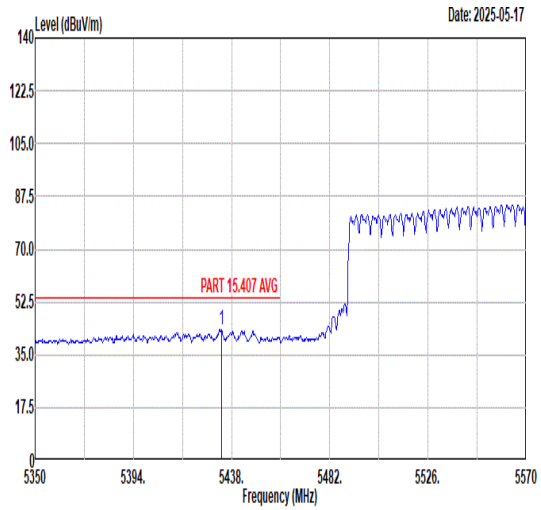

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5742.77 | 49.96 | 68.30 | -18.34 | 39.38 | 34.63 | 8.74 | 32.79 | 311 | 134 | PEAK |
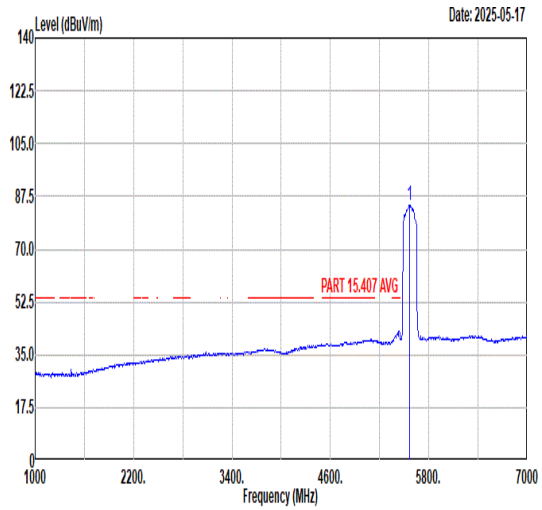
| Mode | 31 |
|---|---|
| | Band Edge - L |
| | U-NII-2C_5.47-5.725_802.11be EHT160_CH114_Full_5570MHz |
| ANT | CDD 6+17 |

| Pol. | Vertical | Fundamental |
|---|---|---|

**Peak**




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5434.70 | 51.37 | 74.00 | -22.63 | 41.39 | 34.16 | 8.44 | 32.62 | 248 | 50 | PEAK |
| 2 | 5464.84 | 48.59 | 68.30 | -19.71 | 38.62 | 34.18 | 8.40 | 32.61 | 248 | 50 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5570.00 | 92.41 | ------ | ------ | 82.49 | 34.32 | 8.26 | 32.66 | 248 | 50 | PEAK |

**Avg**

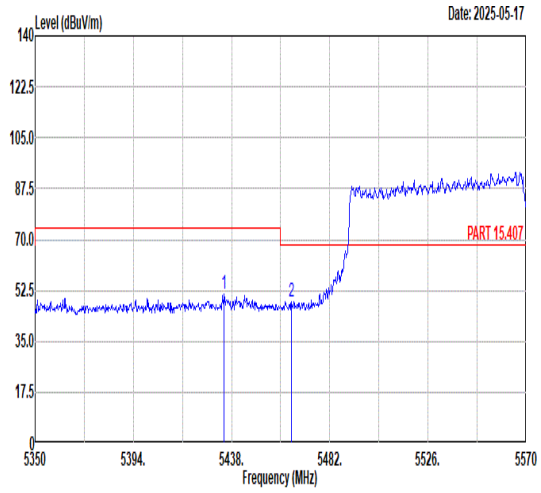


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5434.92 | 41.56 | 54.00 | -12.44 | 31.58 | 34.16 | 8.44 | 32.62 | 248 | 50 | AVERAGE |

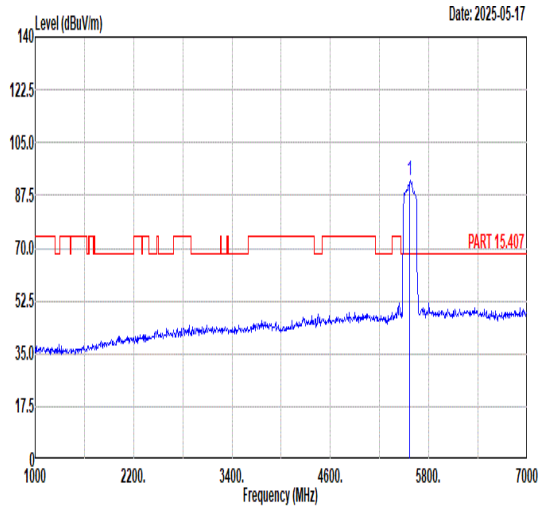


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5570.00 | 84.50 | ------ | ------ | 74.59 | 34.33 | 8.25 | 32.67 | 248 | 50 | AVERAGE |

| Mode | 31 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-2C_5.47-5.725_802.11be EHT160_CH114_Full_5570MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 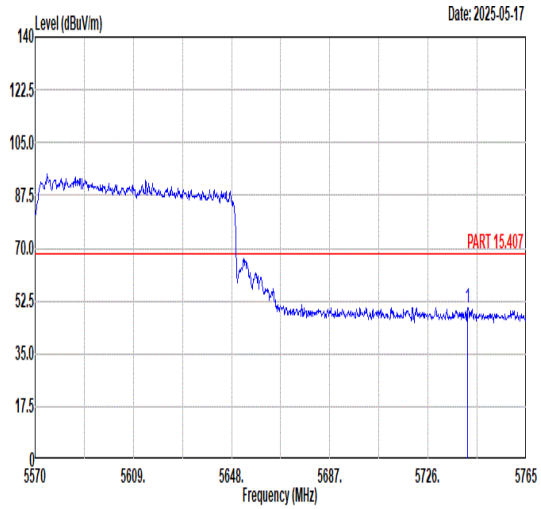 | Blank |

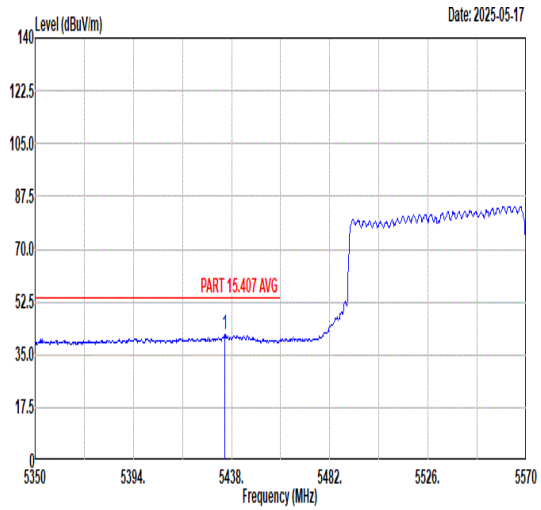

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5741.60 | 50.45 | 68.30 | -17.85 | 39.87 | 34.63 | 8.74 | 32.79 | 248 | 50 | PEAK |
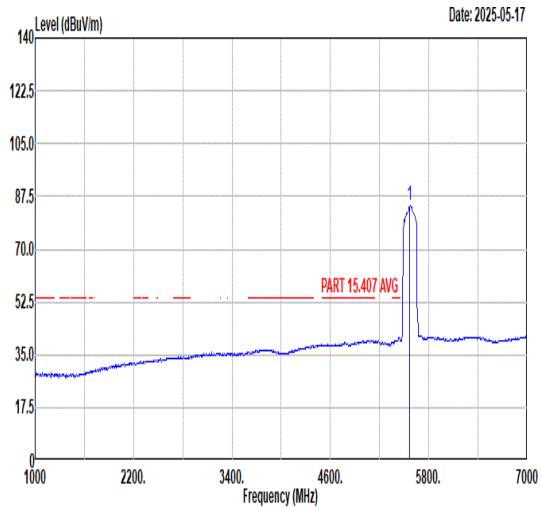
| Mode | 31 | |
|---|---|---|
| | Harmonic | |
| | U-NII-2C_5.47-5.725_802.11be EHT160_CH114_Full_5570MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Vertical |
| Peak<br>Avg | 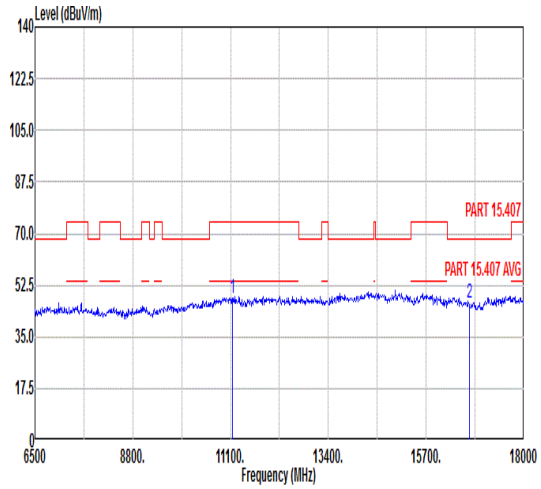 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 11140.00 47.99 74.00 -26.01 56.75 38.10 11.28 58.14 --- --- Peak<br>2 16710.00 46.75 68.30 -21.55 51.79 40.57 13.00 58.61 --- --- Peak | 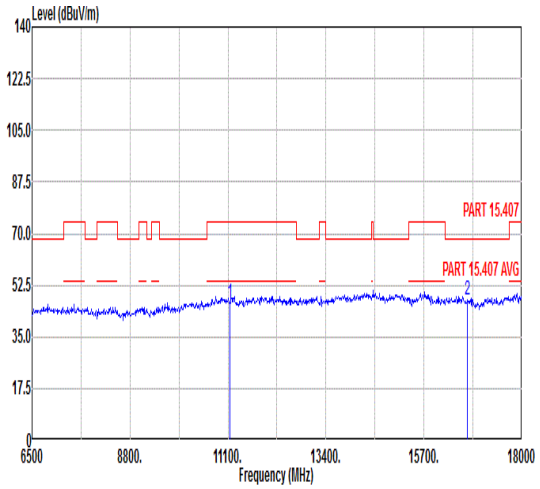 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 11140.00 46.70 74.00 -27.30 55.46 38.10 11.28 58.14 --- --- Peak<br>2 16710.00 47.74 68.30 -20.56 52.78 40.57 13.00 58.61 --- --- Peak |

| Mode | 32 | |
|---|---|---|
| | Band Edge | |
| | U-NII-3_5.725-5.85_802.11a_CH149_5745MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 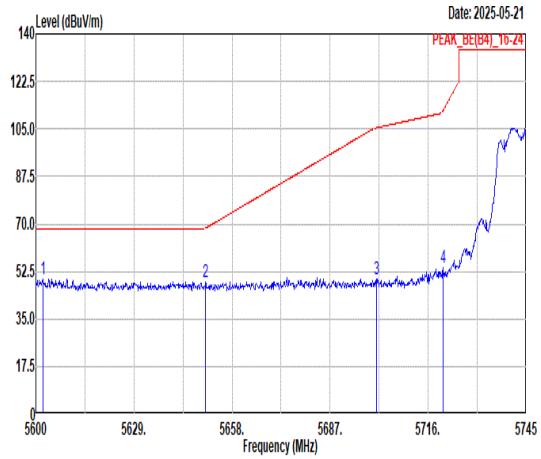 | 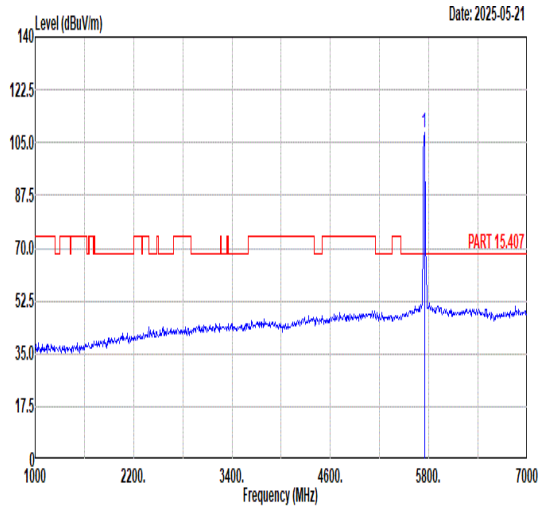 |
| Avg | Blank | 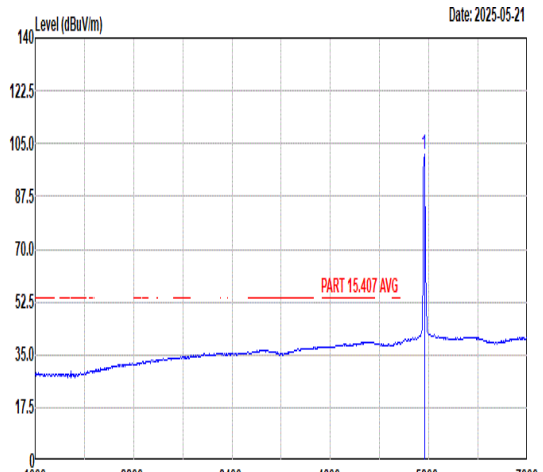 |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5602.03 | 49.53 | 68.30 | -18.77 | 39.61 | 34.38 | 8.22 | 32.68 | 153 | 130 | PEAK |
| 2 | 5650.17 | 48.38 | 68.43 | -20.05 | 38.23 | 34.47 | 8.40 | 32.72 | 153 | 130 | PEAK |
| 3 | 5700.78 | 49.76 | 105.42 | -55.66 | 39.38 | 34.56 | 8.58 | 32.76 | 153 | 130 | PEAK |
| 4 | 5720.35 | 53.69 | 111.60 | -57.91 | 43.22 | 34.59 | 8.66 | 32.78 | 153 | 130 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5745.00 | 108.30 | ------ | ------ | 97.71 | 34.64 | 8.75 | 32.80 | 153 | 130 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5745.00 | 101.22 | ------ | ------ | 90.63 | 34.64 | 8.75 | 32.80 | 153 | 130 | AVERAGE |

| Mode | 32 | |
|---|---|---|
| | Band Edge | |
| | U-NII-3_5.725-5.85_802.11a_CH149_5745MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 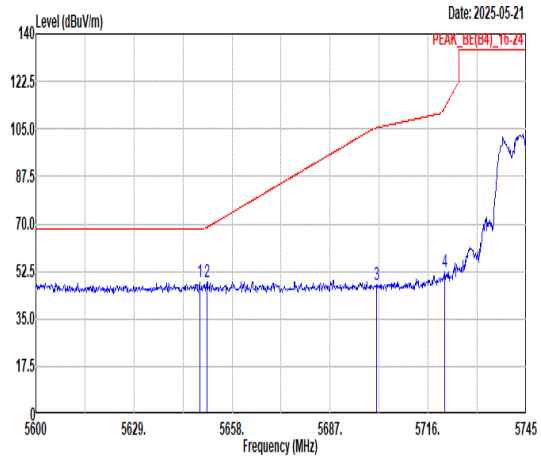 | 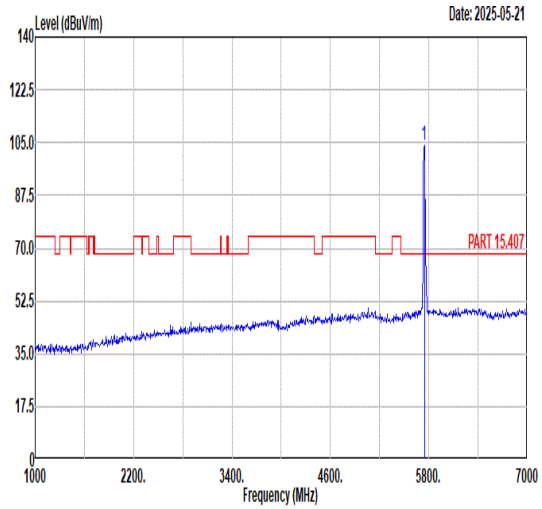 |
| Avg | Blank | 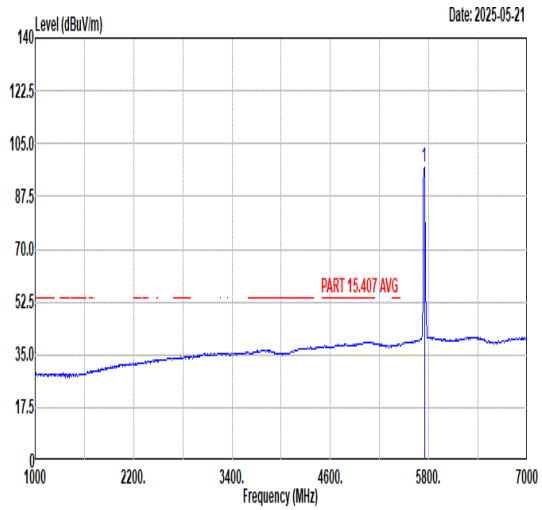 |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5648.43 | 48.52 | 68.30 | -19.78 | 38.39 | 34.46 | 8.39 | 32.72 | 127 | 335 | PEAK |
| 2 | 5650.61 | 48.55 | 68.75 | -20.20 | 38.40 | 34.47 | 8.40 | 32.72 | 127 | 335 | PEAK |
| 3 | 5700.63 | 47.59 | 105.38 | -57.79 | 37.21 | 34.56 | 8.58 | 32.76 | 127 | 335 | PEAK |
| 4 | 5720.79 | 52.52 | 112.59 | -60.07 | 42.05 | 34.59 | 8.66 | 32.78 | 127 | 335 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5745.00 | 104.01 | ------ | ------ | 93.42 | 34.64 | 8.75 | 32.80 | 127 | 335 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5745.00 | 97.03 | ------ | ------ | 86.44 | 34.64 | 8.75 | 32.80 | 127 | 335 | AVERAGE |

| Mode | 32 | |
|---|---|---|
| | Harmonic | |
| | U-NII-3_5.725-5.85_802.11a_CH149_5745MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Vertical |

**Peak**

**Avg**




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 11490.00 | 46.85 | 74.00 | -27.15 | 56.02 | 37.14 | 11.45 | 57.76 | --- | --- | Peak |
| 2 | 17235.00 | 49.22 | 68.30 | -19.08 | 52.75 | 41.27 | 13.17 | 57.97 | --- | --- | Peak |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 11490.00 | 48.58 | 74.00 | -25.42 | 57.75 | 37.14 | 11.45 | 57.76 | --- | --- | Peak |
| 2 | 17235.00 | 48.63 | 68.30 | -19.67 | 52.16 | 41.27 | 13.17 | 57.97 | --- | --- | Peak |

| Mode | 33 | |
|---|---|---|
| | Harmonic | |
| | U-NII-3_5.725-5.85_802.11a_CH157_5785MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Vertical |

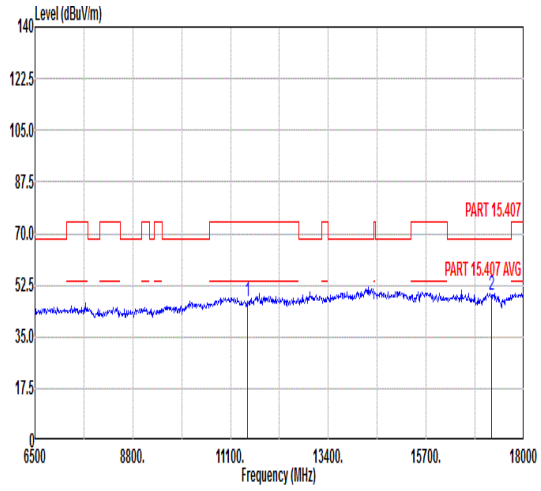Peak
Avg

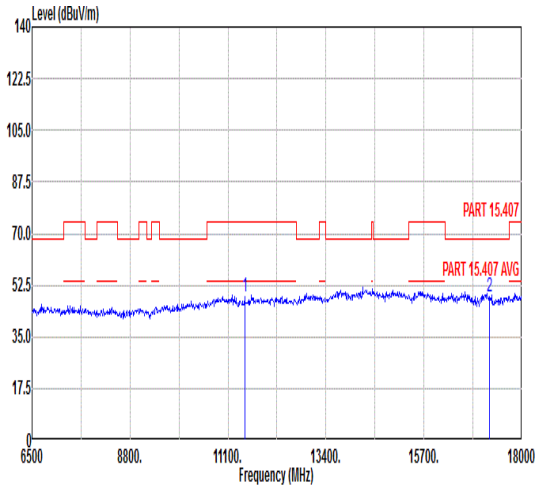


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 11570.00 | 47.56 | 74.00 | -26.44 | 56.46 | 37.28 | 11.49 | 57.67 | --- | --- | Peak |
| 2 | 17355.00 | 46.15 | 68.30 | -22.15 | 49.25 | 41.50 | 13.20 | 57.80 | --- | --- | Peak |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 11570.00 | 46.70 | 74.00 | -27.30 | 55.60 | 37.28 | 11.49 | 57.67 | --- | --- | Peak |
| 2 | 17355.00 | 47.64 | 68.30 | -20.66 | 50.74 | 41.50 | 13.20 | 57.80 | --- | --- | Peak |

| Mode | 34 |
|---|---|
| | Band Edge |
| | U-NII-3_5.725-5.85_802.11a_CH165_5825MHz |
| ANT | CDD 6+17 |
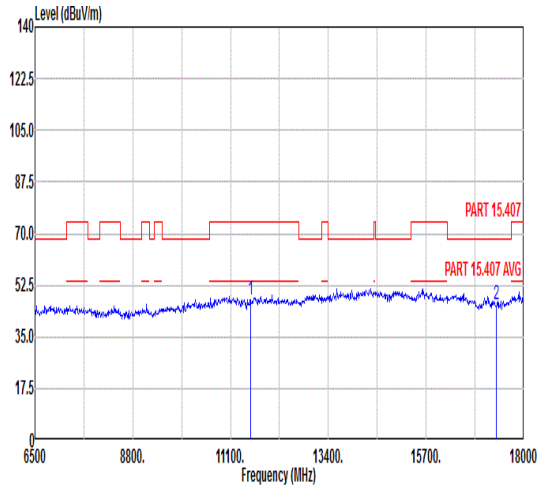
| Pol. | Horizontal | Fundamental |
|---|---|---|

**Peak**

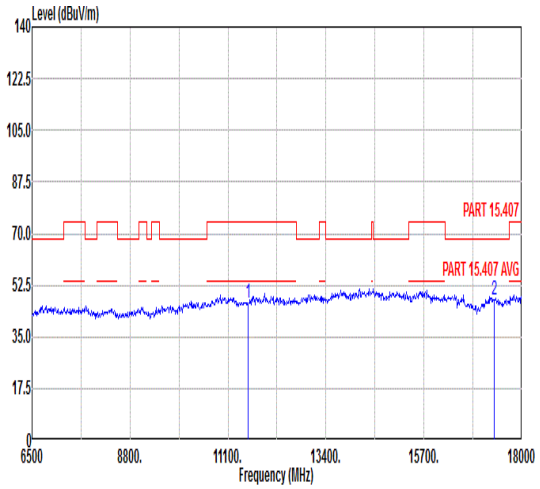


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5855.00 | 52.03 | 110.80 | -58.77 | 41.20 | 34.84 | 8.87 | 32.88 | 153 | 131 | PEAK |
| 2 | 5874.50 | 49.74 | 105.34 | -55.60 | 38.91 | 34.87 | 8.85 | 32.89 | 153 | 131 | PEAK |
| 3 | 5923.88 | 49.55 | 69.03 | -19.48 | 38.73 | 34.96 | 8.79 | 32.93 | 153 | 131 | PEAK |
| 4 | 5947.63 | 50.53 | 68.30 | -17.77 | 39.71 | 35.01 | 8.76 | 32.95 | 153 | 131 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5825.00 | 107.46 | ------ | ------ | 96.63 | 34.78 | 8.91 | 32.86 | 153 | 131 | PEAK |

**Avg**

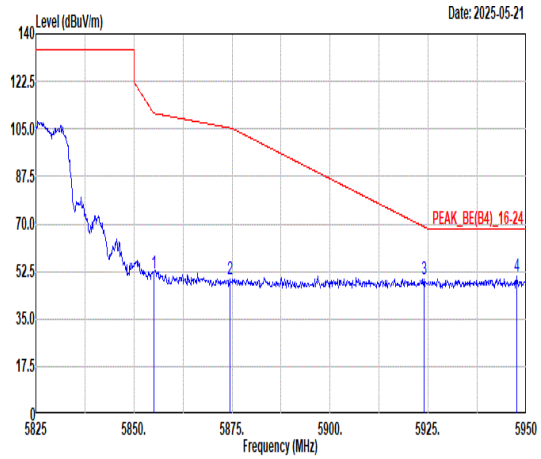**Blank**

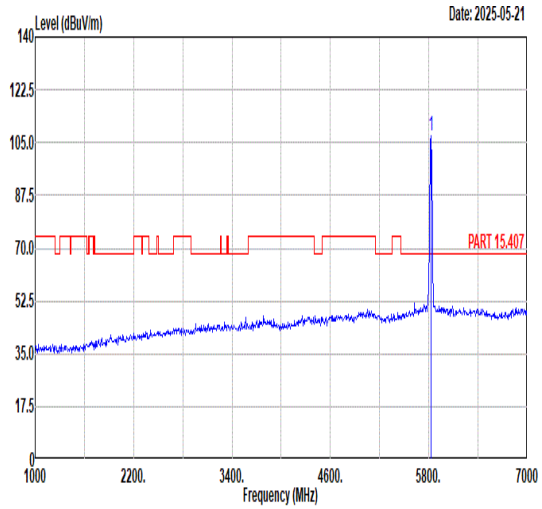


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5825.00 | 101.01 | ------ | ------ | 90.18 | 34.78 | 8.91 | 32.86 | 153 | 131 | AVERAGE |

| Mode | 34 | |
|---|---|---|
| | Band Edge | |
| | U-NII-3_5.725-5.85_802.11a_CH165_5825MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 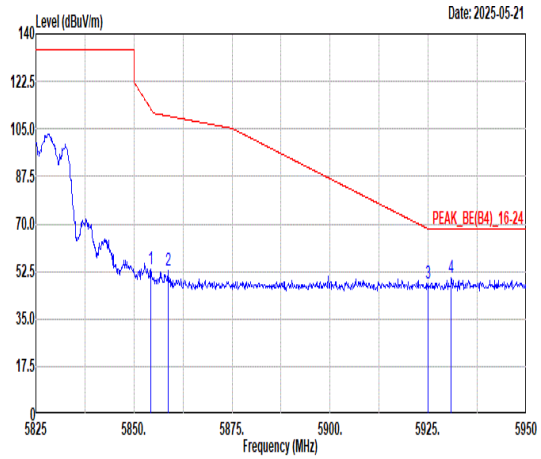 | 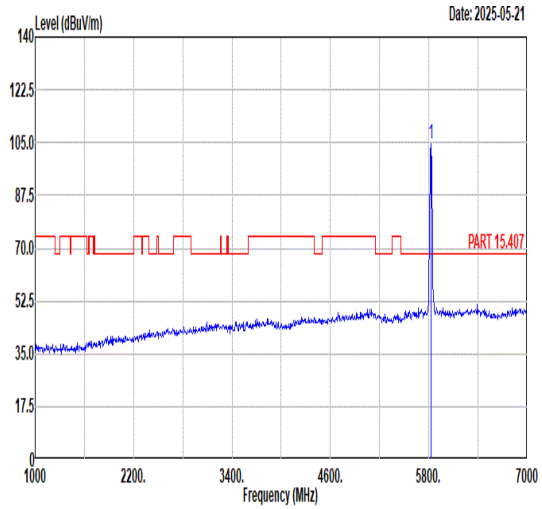 |
| Avg | Blank | 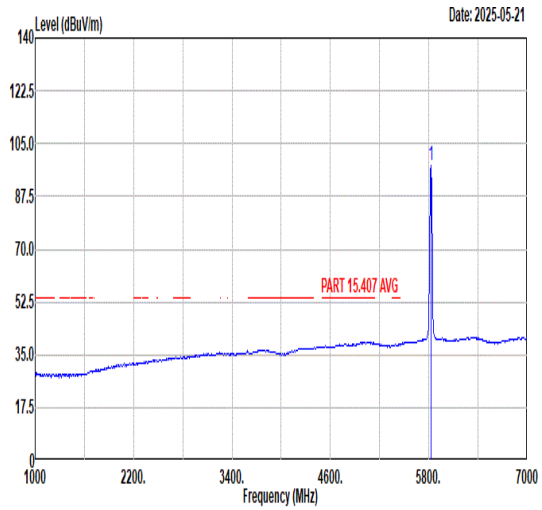 |

Peak (Vertical)

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5854.38 | 53.23 | 112.22 | -58.99 | 42.40 | 34.84 | 8.87 | 32.88 | 138 | 335 | PEAK |
| 2 | 5858.75 | 53.00 | 109.75 | -56.75 | 42.16 | 34.85 | 8.87 | 32.88 | 138 | 335 | PEAK |
| 3 | 5925.00 | 48.31 | 68.20 | -19.89 | 37.48 | 34.97 | 8.79 | 32.93 | 138 | 335 | PEAK |
| 4 | 5930.88 | 50.29 | 68.30 | -18.01 | 39.47 | 34.98 | 8.78 | 32.94 | 138 | 335 | PEAK |

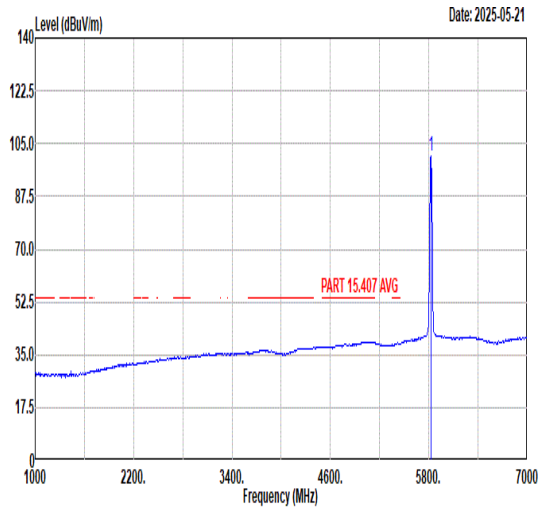Peak (Fundamental)

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5825.00 | 104.67 | ------ | ------ | 93.84 | 34.78 | 8.91 | 32.86 | 138 | 335 | PEAK |

Avg (Fundamental)

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5825.00 | 97.76 | ------ | ------ | 86.93 | 34.78 | 8.91 | 32.86 | 138 | 335 | AVERAGE |

| Mode | 34 | |
|---|---|---|
| | Harmonic | |
| | U-NII-3_5.725-5.85_802.11a_CH165_5825MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Vertical |
| Peak<br>Avg | 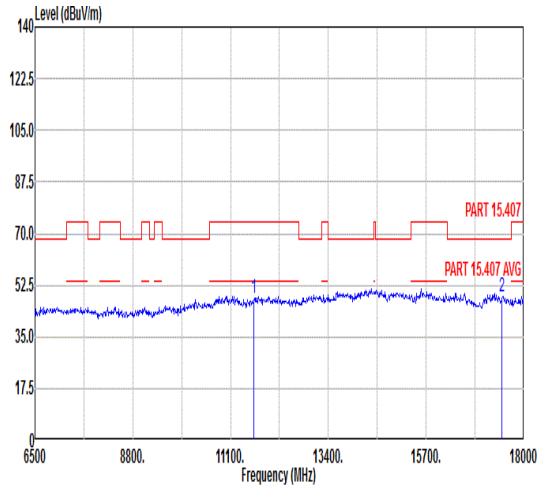 | 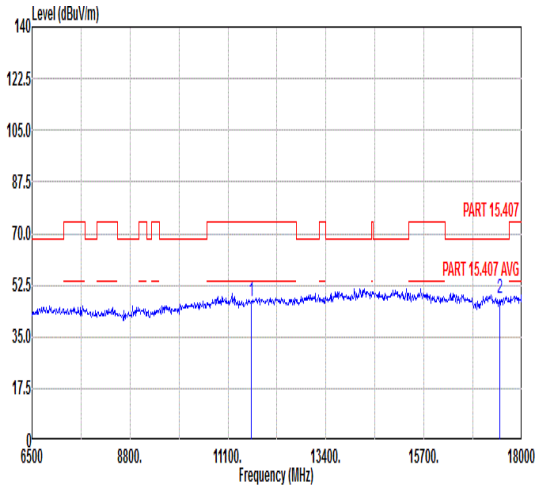 |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 11650.00 | 47.95 | 74.00 | -26.05 | 56.49 | 37.51 | 11.53 | 57.58 | --- | --- | Peak |
| 2 | 17475.00 | 48.79 | 68.30 | -19.51 | 51.45 | 41.74 | 13.23 | 57.63 | --- | --- | Peak |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 11650.00 | 47.23 | 74.00 | -26.77 | 55.77 | 37.51 | 11.53 | 57.58 | --- | --- | Peak |
| 2 | 17475.00 | 47.95 | 68.30 | -20.35 | 50.61 | 41.74 | 13.23 | 57.63 | --- | --- | Peak |

| Mode | 35 | |
|---|---|---|
| | Band Edge | |
| | U-NII-3_5.725-5.85_802.11be EHT20_CH149_Full_5745MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 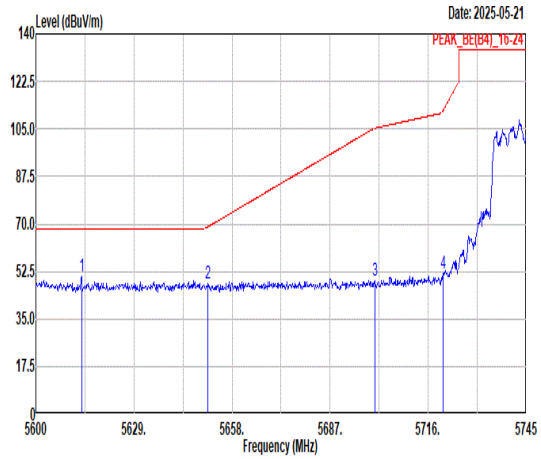 | 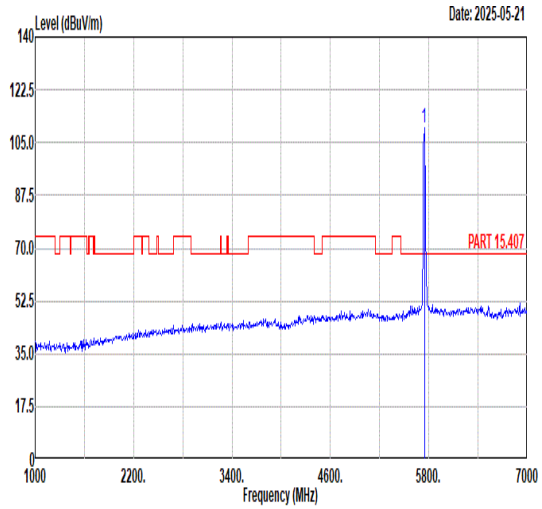 |
| Avg | Blank | 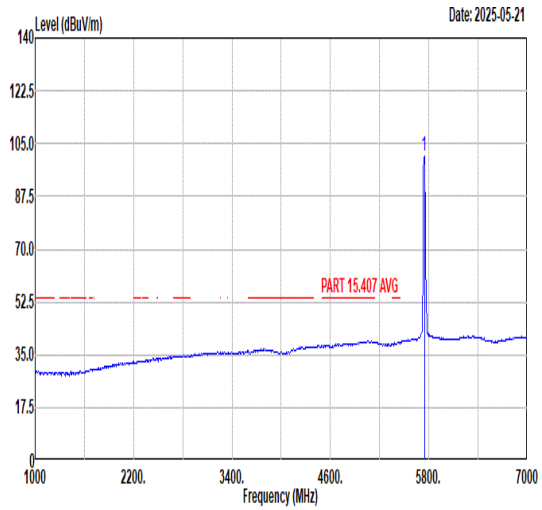 |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5613.49 | 50.81 | 68.30 | -17.49 | 40.84 | 34.40 | 8.26 | 32.69 | 164 | 131 | PEAK |
| 2 | 5650.90 | 47.89 | 68.96 | -21.07 | 37.74 | 34.47 | 8.40 | 32.72 | 164 | 131 | PEAK |
| 3 | 5700.20 | 49.18 | 105.25 | -56.07 | 38.80 | 34.56 | 8.58 | 32.76 | 164 | 131 | PEAK |
| 4 | 5720.35 | 51.65 | 111.60 | -59.95 | 41.18 | 34.59 | 8.66 | 32.78 | 164 | 131 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5745.00 | 109.69 | ------ | ------ | 99.10 | 34.64 | 8.75 | 32.80 | 164 | 131 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5745.00 | 100.67 | ------ | ------ | 90.08 | 34.64 | 8.75 | 32.80 | 164 | 131 | AVERAGE |

| Mode | 35 | |
|---|---|---|
| | Band Edge | |
| | U-NII-3_5.725-5.85_802.11be EHT20_CH149_Full_5745MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 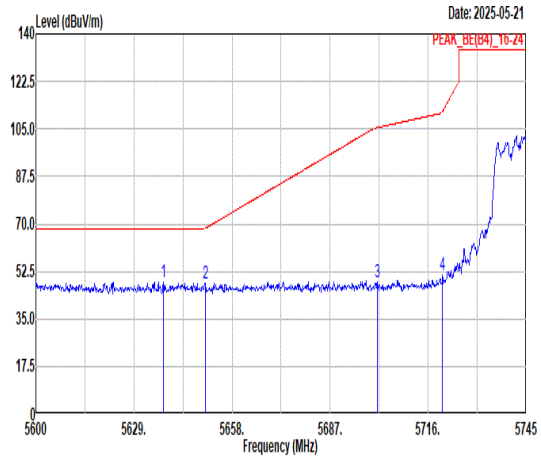 | 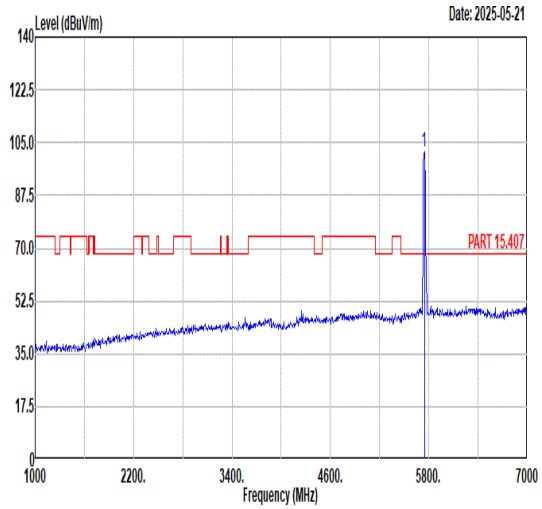 |
| Avg | Blank | 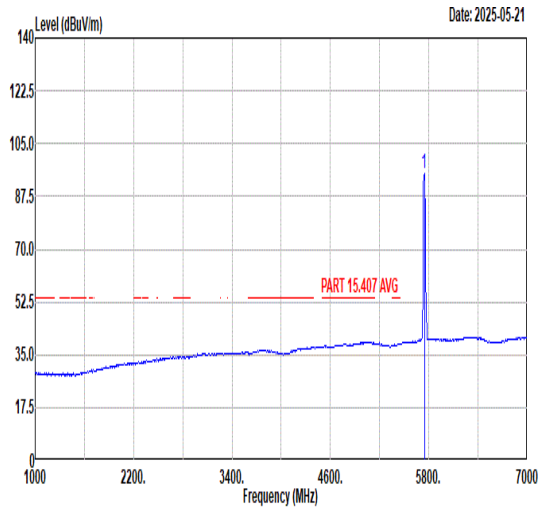 |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5637.70 | 48.85 | 68.30 | -19.45 | 38.77 | 34.44 | 8.35 | 32.71 | 129 | 332 | PEAK |
| 2 | 5650.03 | 48.09 | 68.32 | -20.23 | 37.95 | 34.46 | 8.40 | 32.72 | 129 | 332 | PEAK |
| 3 | 5701.07 | 48.40 | 105.50 | -57.10 | 38.01 | 34.56 | 8.59 | 32.76 | 129 | 332 | PEAK |
| 4 | 5720.21 | 51.22 | 111.27 | -60.05 | 40.75 | 34.59 | 8.66 | 32.78 | 129 | 332 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5745.00 | 102.10 | ------ | ------ | 91.51 | 34.64 | 8.75 | 32.80 | 129 | 332 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5745.00 | 95.34 | ------ | ------ | 84.75 | 34.64 | 8.75 | 32.80 | 129 | 332 | AVERAGE |

| Mode | 35 | |
|---|---|---|
| | Harmonic | |
| | U-NII-3_5.725-5.85_802.11be EHT20_CH149_Full_5745MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Vertical |
| Peak<br>Avg | 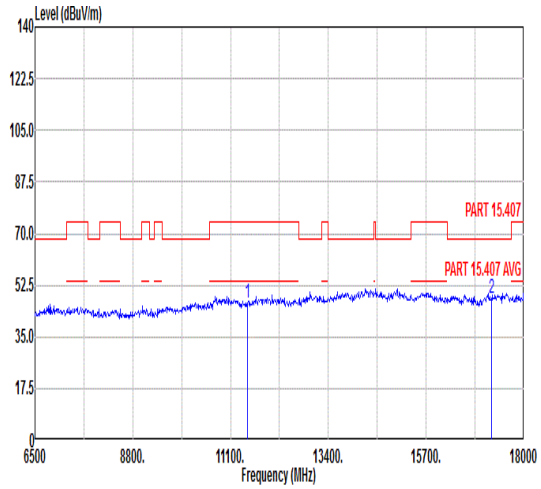 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 11490.00 46.34 74.00 -27.66 55.51 37.14 11.45 57.76 --- --- Peak<br>2 17235.00 48.07 68.30 -20.23 51.60 41.27 13.17 57.97 --- --- Peak | 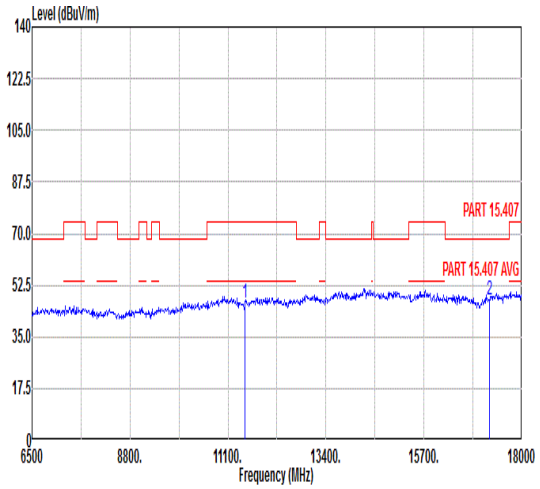 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 11490.00 46.28 74.00 -27.72 55.45 37.14 11.45 57.76 --- --- Peak<br>2 17235.00 47.59 68.30 -20.71 51.12 41.27 13.17 57.97 --- --- Peak |

| Mode | 36 | |
|---|---|---|
| | Harmonic | |
| | U-NII-3_5.725-5.85_802.11be EHT20_CH157_Full_5785MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Vertical |
| Peak<br>Avg | 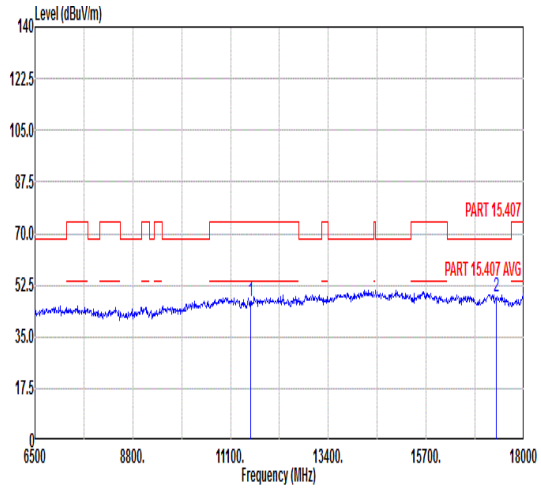 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 11570.00 46.77 74.00 -27.23 55.67 37.28 11.49 57.67 --- --- Peak<br>2 17355.00 48.83 68.30 -19.47 51.93 41.50 13.20 57.80 --- --- Peak | 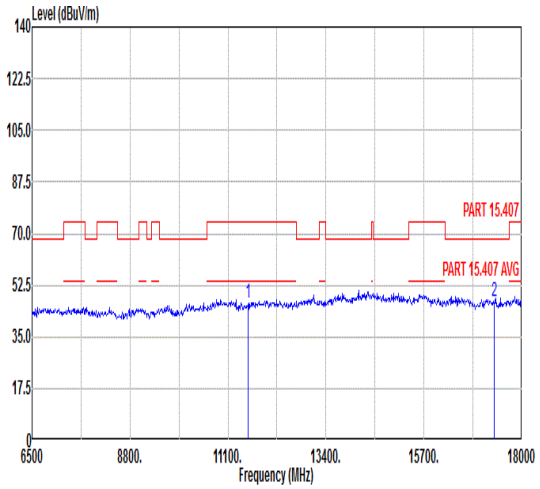 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 11570.00 46.40 74.00 -27.60 55.30 37.28 11.49 57.67 --- --- Peak<br>2 17355.00 47.01 68.30 -21.29 50.11 41.50 13.20 57.80 --- --- Peak |

| Mode | 37 | |
|---|---|---|
| | Band Edge | |
| | U-NII-3_5.725-5.85_802.11be EHT20_CH165_Full_5825MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 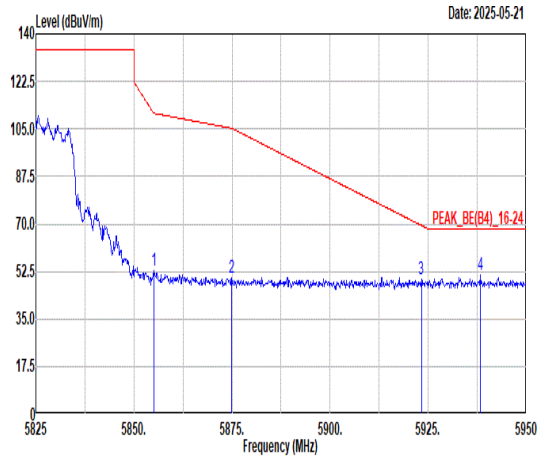 | 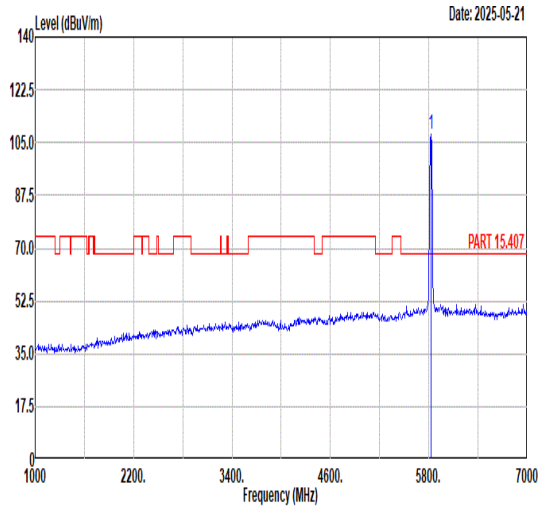 |
| Avg | Blank | 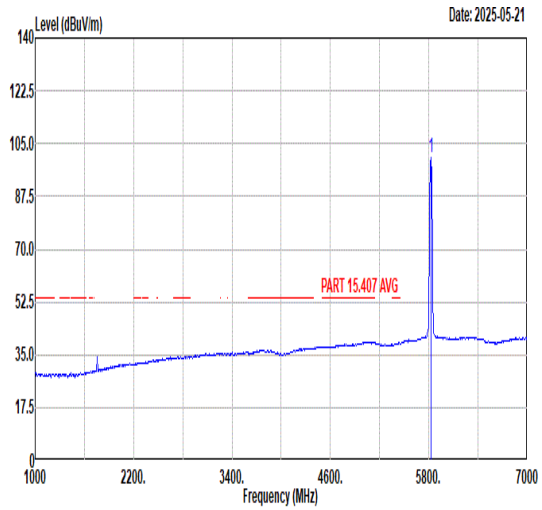 |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5855.00 | 52.89 | 110.80 | -57.91 | 42.06 | 34.84 | 8.87 | 32.88 | 159 | 129 | PEAK |
| 2 | 5874.88 | 50.03 | 105.23 | -55.20 | 39.19 | 34.88 | 8.85 | 32.89 | 159 | 129 | PEAK |
| 3 | 5923.25 | 49.73 | 69.49 | -19.76 | 38.91 | 34.96 | 8.79 | 32.93 | 159 | 129 | PEAK |
| 4 | 5938.25 | 51.32 | 68.30 | -16.98 | 40.50 | 34.99 | 8.77 | 32.94 | 159 | 129 | PEAK |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5825.00 | 107.88 | ------ | ------ | 97.05 | 34.78 | 8.91 | 32.86 | 159 | 129 | PEAK |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5825.00 | 100.30 | ------ | ------ | 89.47 | 34.78 | 8.91 | 32.86 | 159 | 129 | AVERAGE |

| Mode | 37 | |
|---|---|---|
| | Band Edge | |
| | U-NII-3_5.725-5.85_802.11be EHT20_CH165_Full_5825MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 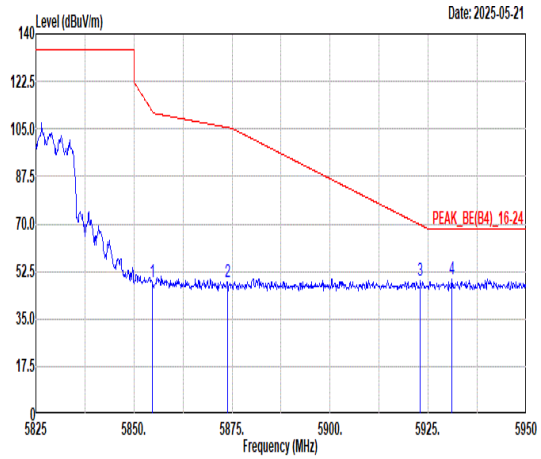 | 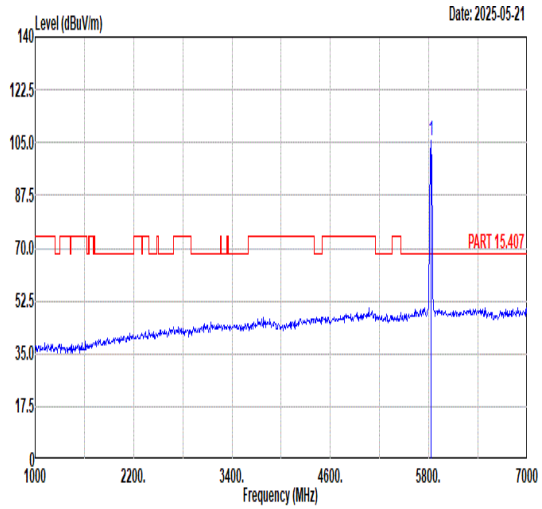 |
| Avg | Blank | 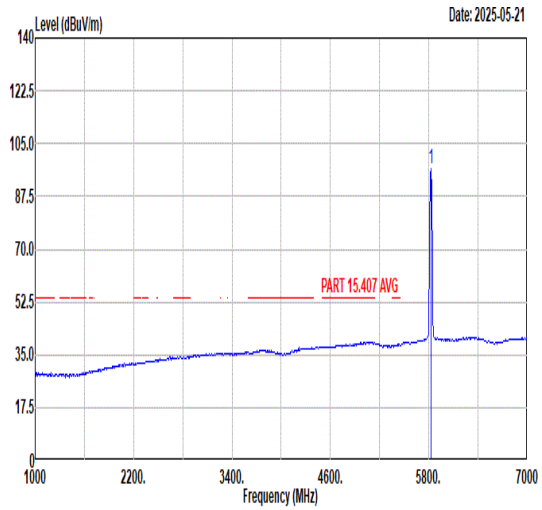 |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5854.75 | 48.64 | 111.37 | -62.73 | 37.81 | 34.84 | 8.87 | 32.88 | 108 | 336 | PEAK |
| 2 | 5873.88 | 48.66 | 105.51 | -56.85 | 37.83 | 34.87 | 8.85 | 32.89 | 108 | 336 | PEAK |
| 3 | 5923.00 | 49.01 | 69.67 | -20.66 | 38.19 | 34.96 | 8.79 | 32.93 | 108 | 336 | PEAK |
| 4 | 5931.00 | 49.55 | 68.30 | -18.75 | 38.73 | 34.98 | 8.78 | 32.94 | 108 | 336 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5825.00 | 105.53 | ------ | ------ | 94.70 | 34.78 | 8.91 | 32.86 | 108 | 336 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5825.00 | 96.65 | ------ | ------ | 85.82 | 34.78 | 8.91 | 32.86 | 108 | 336 | AVERAGE |

| Mode | 37 | |
|---|---|---|
| | Harmonic | |
| | U-NII-3_5.725-5.85_802.11be EHT20_CH165_Full_5825MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Vertical |
| Peak<br>Avg | 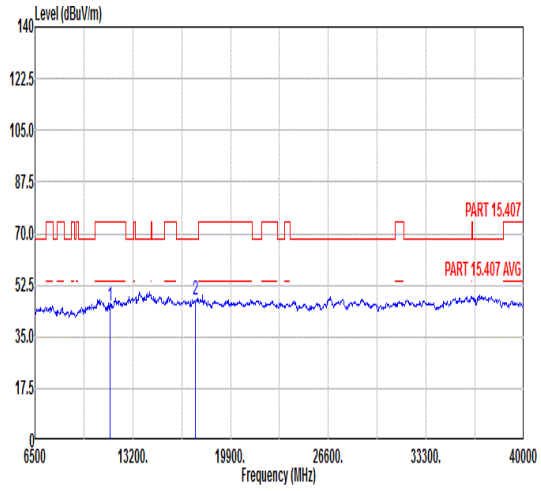 | 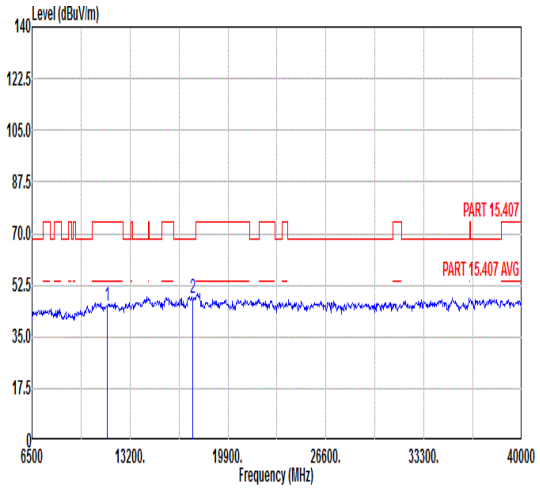 |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 11650.00 | 45.47 | 74.00 | -28.53 | 54.01 | 37.51 | 11.53 | 57.58 | --- | --- | Peak |
| 2 | 17475.00 | 47.70 | 68.30 | -20.60 | 50.36 | 41.74 | 13.23 | 57.63 | --- | --- | Peak |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 11650.00 | 45.64 | 74.00 | -28.36 | 54.18 | 37.51 | 11.53 | 57.58 | --- | --- | Peak |
| 2 | 17475.00 | 48.04 | 68.30 | -20.26 | 50.70 | 41.74 | 13.23 | 57.63 | --- | --- | Peak |

| Mode | 38 | |
|---|---|---|
| | Band Edge - L | |
| | U-NII-3_5.725-5.85_802.11be EHT40_CH151_Full_5755MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 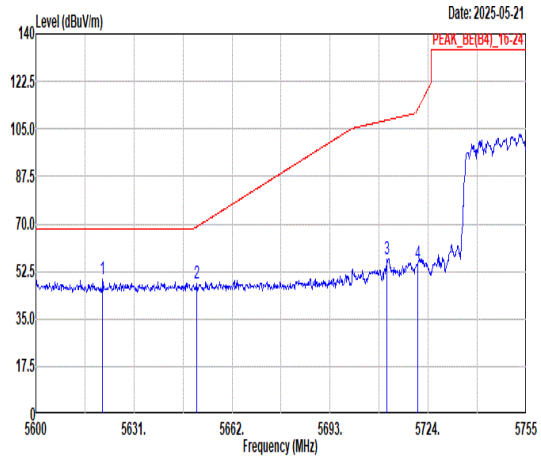 | 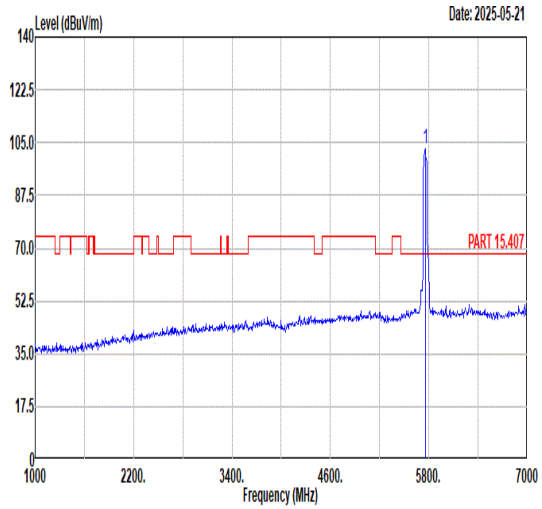 |
| Avg | Blank | 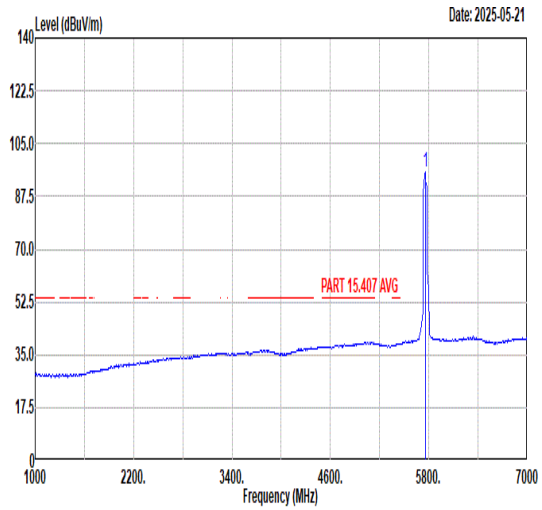 |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5621.08 | 49.64 | 68.30 | -18.66 | 39.64 | 34.41 | 8.29 | 32.70 | 176 | 138 | PEAK |
| 2 | 5650.84 | 48.05 | 68.92 | -20.87 | 37.90 | 34.47 | 8.40 | 32.72 | 176 | 138 | PEAK |
| 3 | 5710.98 | 57.25 | 108.28 | -51.03 | 46.82 | 34.58 | 8.62 | 32.77 | 176 | 138 | PEAK |
| 4 | 5720.59 | 55.65 | 112.15 | -56.50 | 45.18 | 34.59 | 8.66 | 32.78 | 176 | 138 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5755.00 | 103.26 | ------ | ------ | 92.60 | 34.66 | 8.80 | 32.80 | 176 | 138 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5755.00 | 95.39 | ------ | ------ | 84.73 | 34.66 | 8.80 | 32.80 | 176 | 138 | AVERAGE |

| Mode | 38 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-3_5.725-5.85_802.11be EHT40_CH151_Full_5755MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 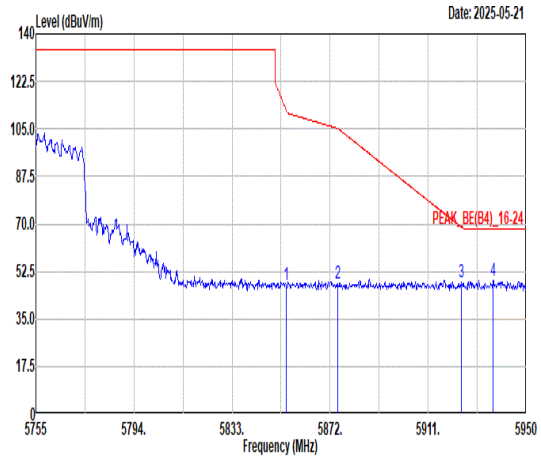 | Blank |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5854.65 | 47.70 | 111.61 | -63.91 | 36.87 | 34.84 | 8.87 | 32.88 | 176 | 138 | PEAK |
| 2 | 5874.93 | 47.91 | 105.22 | -57.31 | 37.07 | 34.88 | 8.85 | 32.89 | 176 | 138 | PEAK |
| 3 | 5924.26 | 48.48 | 68.75 | -20.27 | 37.65 | 34.97 | 8.79 | 32.93 | 176 | 138 | PEAK |
| 4 | 5936.74 | 49.17 | 68.30 | -19.13 | 38.34 | 34.99 | 8.78 | 32.94 | 176 | 138 | PEAK |

| Mode | 38 | |
|---|---|---|
| | Band Edge - L | |
| | U-NII-3_5.725-5.85_802.11be EHT40_CH151_Full_5755MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 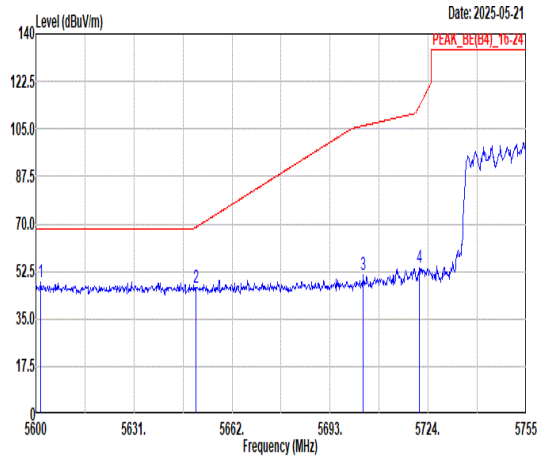 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5601.40 48.45 68.30 -19.85 38.53 34.38 8.22 32.68 121 344 PEAK<br>2 5650.69 46.64 68.81 -22.17 36.49 34.47 8.40 32.72 121 344 PEAK<br>3 5703.54 51.00 106.19 -55.19 40.61 34.56 8.59 32.76 121 344 PEAK<br>4 5721.21 54.08 113.56 -59.48 43.61 34.59 8.66 32.78 121 344 PEAK | 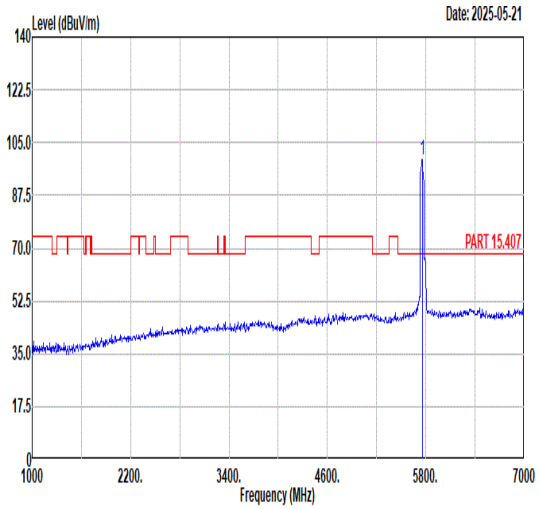 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5755.00 99.53 ------ ------ 88.91 34.65 8.77 32.80 121 344 PEAK |
| Avg | Blank | 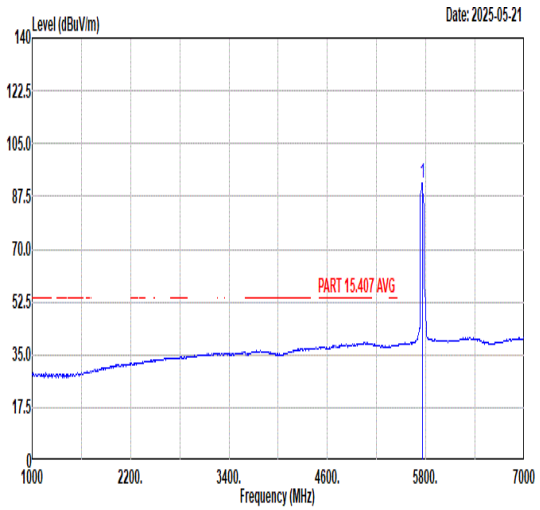 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5755.00 92.15 ------ ------ 81.53 34.65 8.77 32.80 121 344 AVERAGE |

| Mode | 38 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-3_5.725-5.85_802.11be EHT40_CH151_Full_5755MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 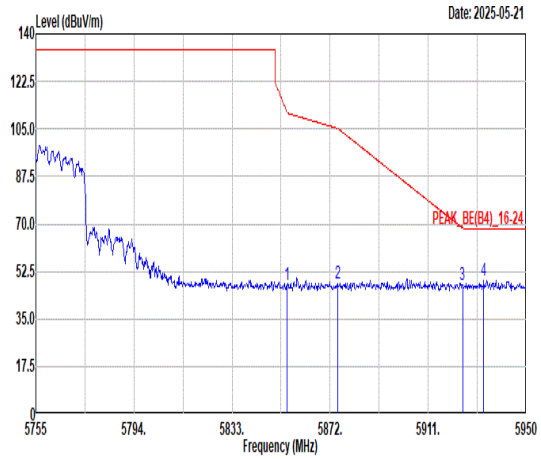 | Blank |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5854.84 | 47.62 | 111.17 | -63.55 | 36.79 | 34.84 | 8.87 | 32.88 | 121 | 344 | PEAK |
| 2 | 5874.93 | 47.97 | 105.22 | -57.25 | 37.13 | 34.88 | 8.85 | 32.89 | 121 | 344 | PEAK |
| 3 | 5924.65 | 47.69 | 68.46 | -20.77 | 36.86 | 34.97 | 8.79 | 32.93 | 121 | 344 | PEAK |
| 4 | 5933.04 | 49.07 | 68.30 | -19.23 | 38.25 | 34.98 | 8.78 | 32.94 | 121 | 344 | PEAK |

| Mode | 38 | |
|---|---|---|
| | Harmonic | |
| | U-NII-3_5.725-5.85_802.11be EHT40_CH151_Full_5755MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Vertical |
| Peak<br>Avg | 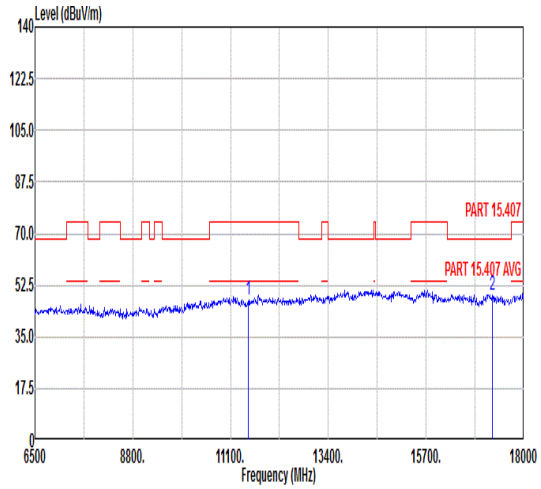 | 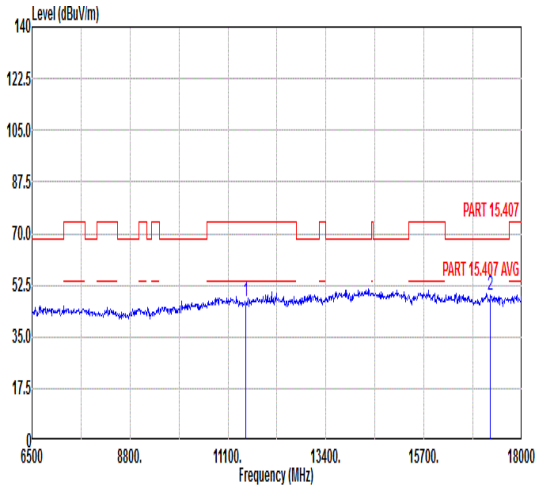 |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 11510.00 | 47.36 | 74.00 | -26.64 | 56.53 | 37.11 | 11.46 | 57.74 | --- | --- | Peak |
| 2 | 17265.00 | 49.26 | 68.30 | -19.04 | 52.68 | 41.33 | 13.18 | 57.93 | --- | --- | Peak |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 11510.00 | 47.09 | 74.00 | -26.91 | 56.26 | 37.11 | 11.46 | 57.74 | --- | --- | Peak |
| 2 | 17265.00 | 48.90 | 68.30 | -19.40 | 52.32 | 41.33 | 13.18 | 57.93 | --- | --- | Peak |

| Mode | 39 | |
|---|---|---|
| | Band Edge - L | |
| | U-NII-3_5.725-5.85_802.11be EHT40_CH159_Full_5795MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 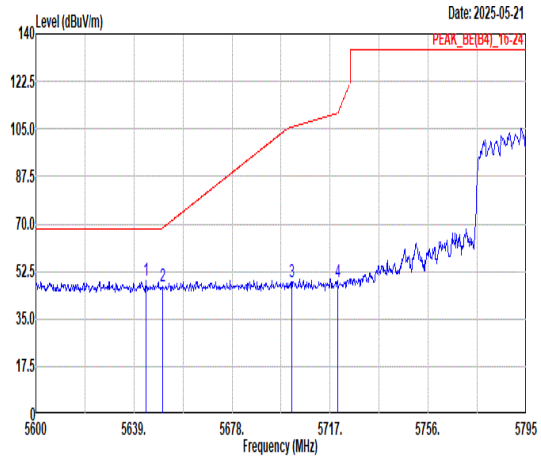 | 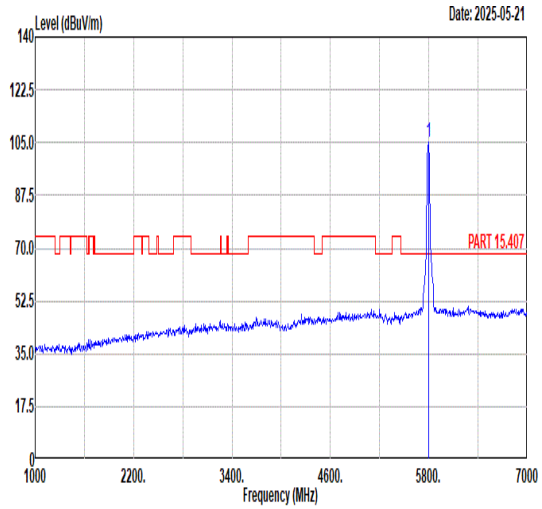 |
| Avg | Blank | 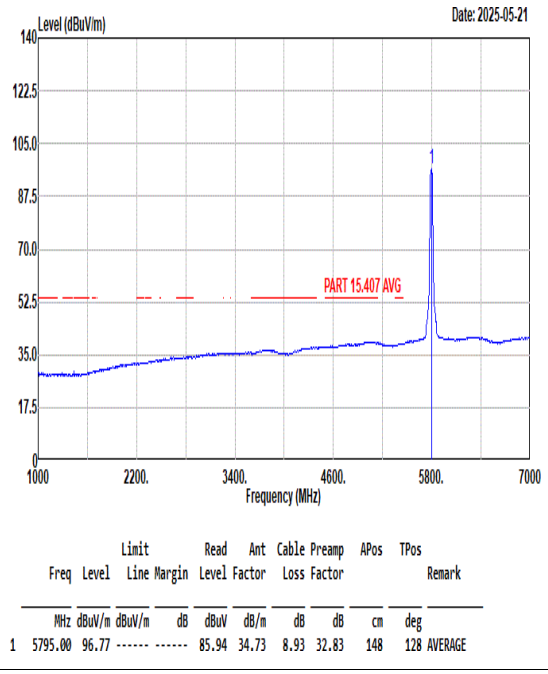 |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5643.68 | 49.04 | 68.30 | -19.26 | 38.94 | 34.45 | 8.37 | 32.72 | 148 | 128 | PEAK |
| 2 | 5650.31 | 46.98 | 68.53 | -21.55 | 36.83 | 34.47 | 8.40 | 32.72 | 148 | 128 | PEAK |
| 3 | 5701.79 | 48.76 | 105.70 | -56.94 | 38.37 | 34.56 | 8.59 | 32.76 | 148 | 128 | PEAK |
| 4 | 5720.12 | 48.60 | 111.07 | -62.47 | 38.13 | 34.59 | 8.66 | 32.78 | 148 | 128 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5795.00 | 104.87 | ------ | ------ | 94.04 | 34.73 | 8.93 | 32.83 | 148 | 128 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5795.00 | 96.77 | ------ | ------ | 85.94 | 34.73 | 8.93 | 32.83 | 148 | 128 | AVERAGE |

| Mode | 39 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-3_5.725-5.85_802.11be EHT40_CH159_Full_5795MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 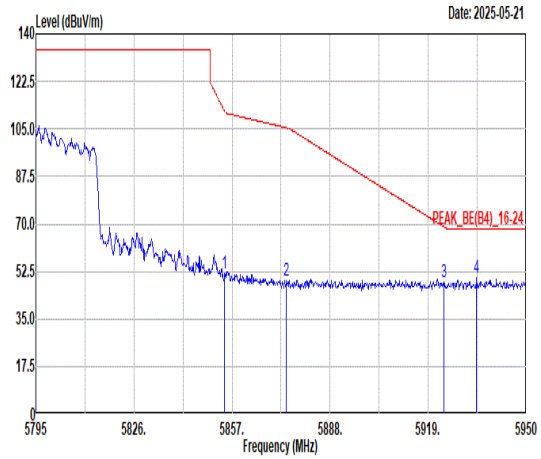 | Blank |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5854.68 | 51.93 | 111.54 | -59.61 | 41.10 | 34.84 | 8.87 | 32.88 | 148 | 128 | PEAK |
| 2 | 5874.21 | 49.31 | 105.42 | -56.11 | 38.48 | 34.87 | 8.85 | 32.89 | 148 | 128 | PEAK |
| 3 | 5923.96 | 48.58 | 68.97 | -20.39 | 37.76 | 34.96 | 8.79 | 32.93 | 148 | 128 | PEAK |
| 4 | 5934.35 | 49.93 | 68.30 | -18.37 | 39.11 | 34.98 | 8.78 | 32.94 | 148 | 128 | PEAK |

| Mode | 39 | |
|---|---|---|
| | Band Edge - L | |
| | U-NII-3_5.725-5.85_802.11be EHT40_CH159_Full_5795MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 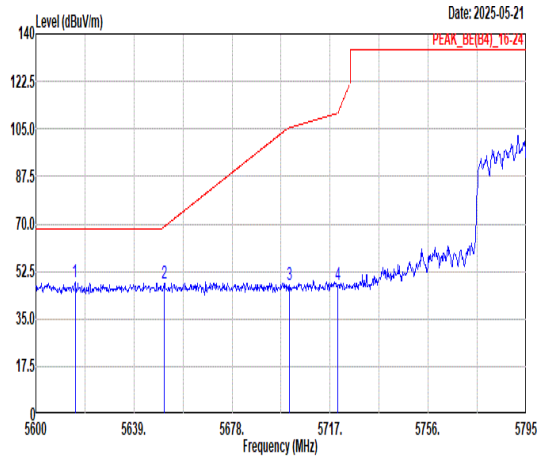 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5615.60 48.41 68.30 -19.89 38.44 34.40 8.27 32.70 121 344 PEAK<br>2 5650.90 48.11 68.96 -20.85 37.96 34.47 8.40 32.72 121 344 PEAK<br>3 5700.82 47.58 105.43 -57.85 37.20 34.56 8.58 32.76 121 344 PEAK<br>4 5720.12 47.49 111.07 -63.58 37.02 34.59 8.66 32.78 121 344 PEAK | 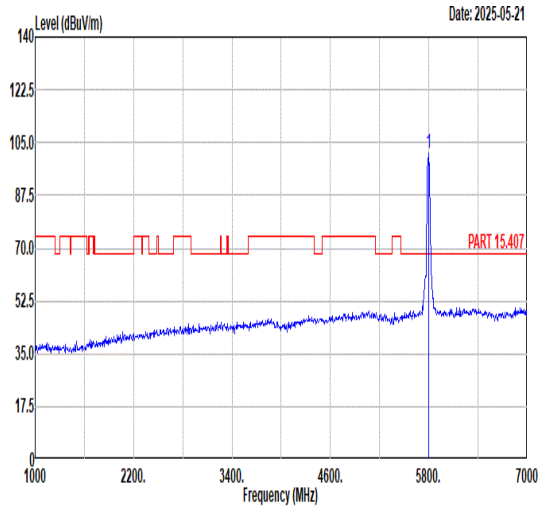 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5795.00 101.39 ------ ------ 90.56 34.73 8.93 32.83 121 344 PEAK |
| Avg | Blank | 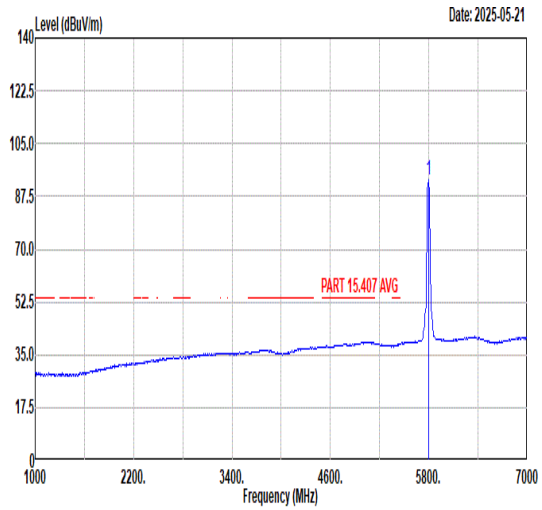 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5795.00 92.78 ------ ------ 81.95 34.73 8.93 32.83 121 344 AVERAGE |

| Mode | 39 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-3_5.725-5.85_802.11be EHT40_CH159_Full_5795MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 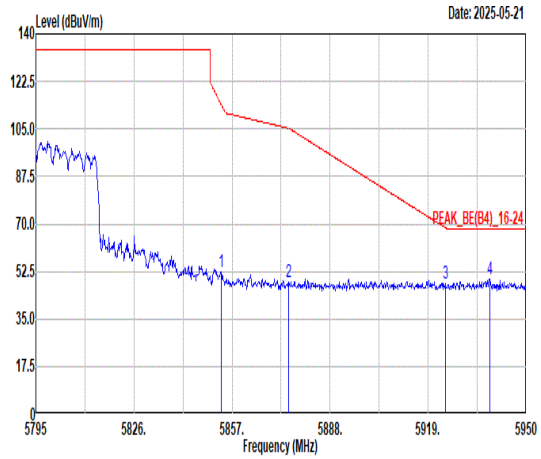 | Blank |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5853.59 | 52.54 | 114.01 | -61.47 | 41.71 | 34.84 | 8.87 | 32.88 | 121 | 344 | PEAK |
| 2 | 5874.98 | 48.74 | 105.21 | -56.47 | 37.90 | 34.88 | 8.85 | 32.89 | 121 | 344 | PEAK |
| 3 | 5924.43 | 48.03 | 68.62 | -20.59 | 37.20 | 34.97 | 8.79 | 32.93 | 121 | 344 | PEAK |
| 4 | 5938.38 | 49.67 | 68.30 | -18.63 | 38.85 | 34.99 | 8.77 | 32.94 | 121 | 344 | PEAK |

| Mode | 39 | |
|---|---|---|
| | Harmonic | |
| | U-NII-3_5.725-5.85_802.11be EHT40_CH159_Full_5795MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Vertical |
| Peak<br>Avg | 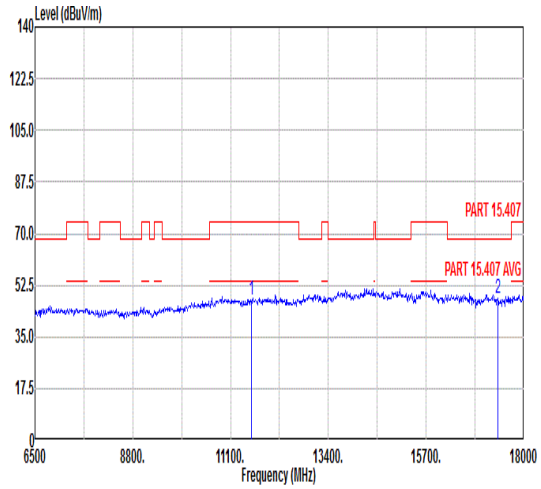 | 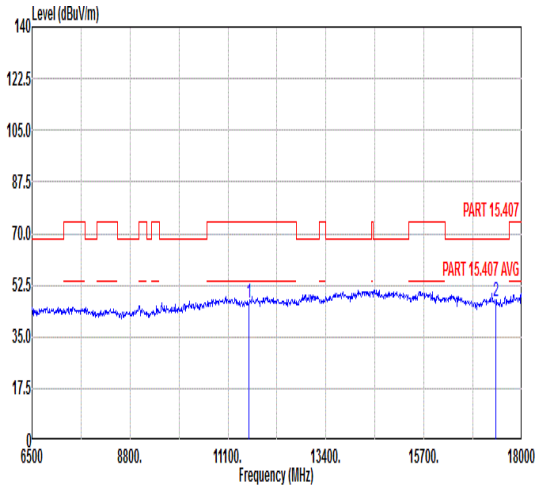 |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 11590.00 | 47.79 | 74.00 | -26.21 | 56.60 | 37.34 | 11.50 | 57.65 | --- | --- | Peak |
| 2 | 17385.00 | 48.26 | 68.30 | -20.04 | 51.25 | 41.56 | 13.21 | 57.76 | --- | --- | Peak |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 11590.00 | 46.66 | 74.00 | -27.34 | 55.47 | 37.34 | 11.50 | 57.65 | --- | --- | Peak |
| 2 | 17385.00 | 47.19 | 68.30 | -21.11 | 50.18 | 41.56 | 13.21 | 57.76 | --- | --- | Peak |

| Mode | 40 | |
|---|---|---|
| | Band Edge - L | |
| | U-NII-3_5.725-5.85_802.11be EHT80_CH155_Full_5775MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 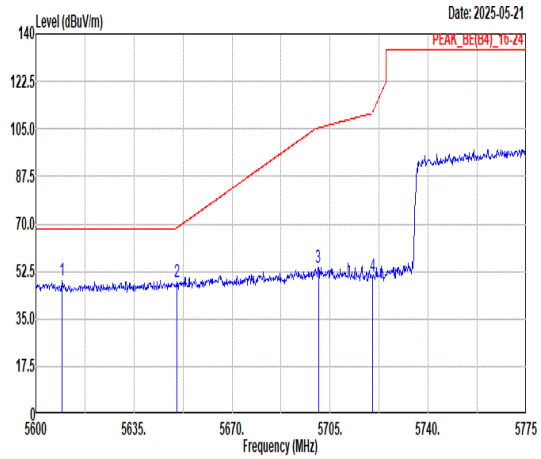 | 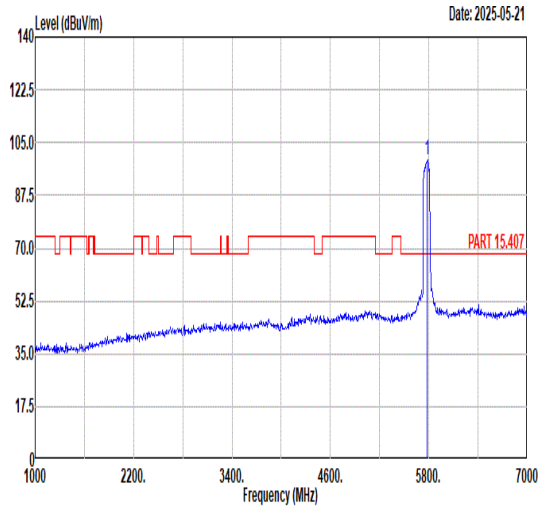 |
| Avg | Blank | 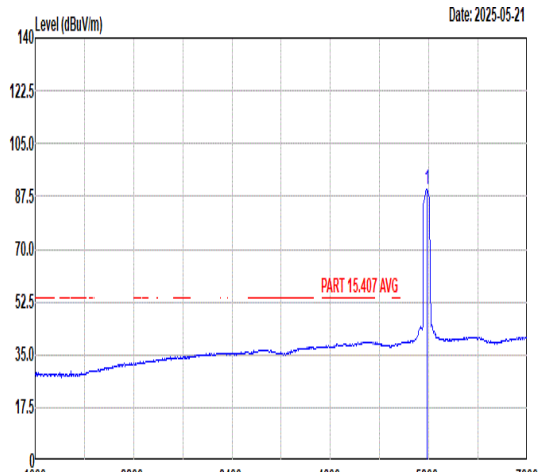 |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5609.45 | 48.99 | 68.30 | -19.31 | 39.04 | 34.39 | 8.25 | 32.69 | 150 | 127 | PEAK |
| 2 | 5650.23 | 48.48 | 68.47 | -19.99 | 38.33 | 34.47 | 8.40 | 32.72 | 150 | 127 | PEAK |
| 3 | 5700.80 | 53.95 | 105.42 | -51.47 | 43.57 | 34.56 | 8.58 | 32.76 | 150 | 127 | PEAK |
| 4 | 5720.05 | 50.90 | 110.91 | -60.01 | 40.43 | 34.59 | 8.66 | 32.78 | 150 | 127 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5775.00 | 99.08 | ------ | ------ | 88.28 | 34.72 | 8.91 | 32.83 | 150 | 127 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5775.00 | 89.93 | ------ | ------ | 79.16 | 34.71 | 8.88 | 32.82 | 150 | 127 | AVERAGE |

| Mode | 40 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-3_5.725-5.85_802.11be EHT80_CH155_Full_5775MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 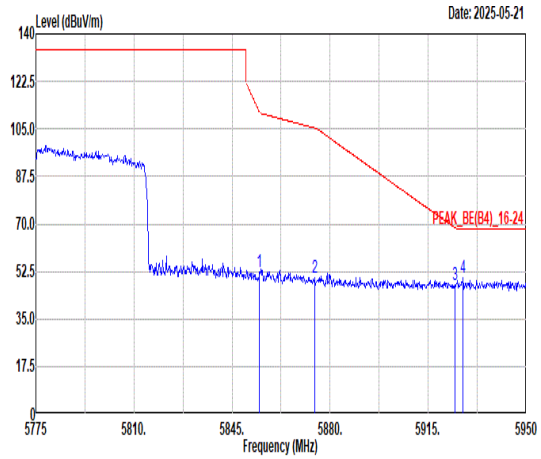 | Blank |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5854.80 | 52.05 | 111.26 | -59.21 | 41.22 | 34.84 | 8.87 | 32.88 | 150 | 127 | PEAK |
| 2 | 5874.40 | 50.43 | 105.37 | -54.94 | 39.60 | 34.87 | 8.85 | 32.89 | 150 | 127 | PEAK |
| 3 | 5924.63 | 47.53 | 68.48 | -20.95 | 36.70 | 34.97 | 8.79 | 32.93 | 150 | 127 | PEAK |
| 4 | 5927.43 | 50.02 | 68.30 | -18.28 | 39.19 | 34.97 | 8.79 | 32.93 | 150 | 127 | PEAK |

| Mode | 40 | |
|---|---|---|
| | Band Edge - L | |
| | U-NII-3_5.725-5.85_802.11be EHT80_CH155_Full_5775MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 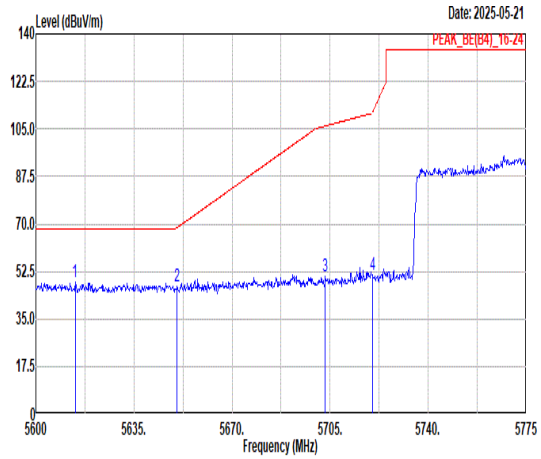 | 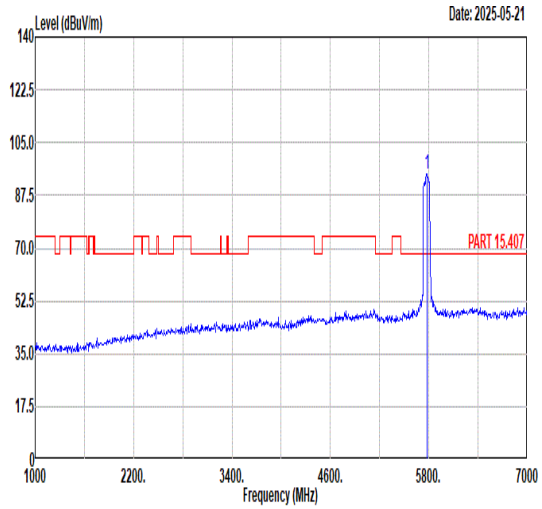 |
| Avg | Blank | 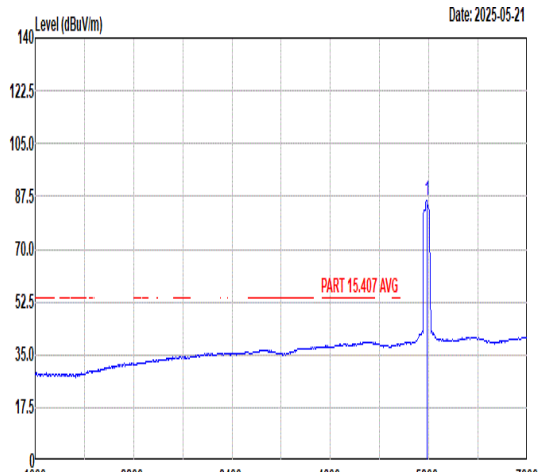 |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5614.00 | 48.39 | 68.30 | -19.91 | 38.42 | 34.40 | 8.26 | 32.69 | 127 | 334 | PEAK |
| 2 | 5650.40 | 47.18 | 68.60 | -21.42 | 37.03 | 34.47 | 8.40 | 32.72 | 127 | 334 | PEAK |
| 3 | 5703.25 | 50.79 | 106.11 | -55.32 | 40.40 | 34.56 | 8.59 | 32.76 | 127 | 334 | PEAK |
| 4 | 5720.23 | 51.45 | 111.31 | -59.86 | 40.98 | 34.59 | 8.66 | 32.78 | 127 | 334 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5775.00 | 94.65 | ------ | ------ | 83.94 | 34.68 | 8.84 | 32.81 | 127 | 334 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5775.00 | 86.34 | ------ | ------ | 75.63 | 34.68 | 8.84 | 32.81 | 127 | 334 | AVERAGE |

<table>
<tr><td rowspan="3">Mode</td><td colspan="2">40</td></tr>
<tr><td colspan="2">Band Edge - R</td></tr>
<tr><td colspan="2">U-NII-3_5.725-5.85_802.11be EHT80_CH155_Full_5775MHz</td></tr>
<tr><td>ANT</td><td colspan="2">CDD 6+17</td></tr>
<tr><td>Pol.</td><td>Vertical</td><td>Fundamental</td></tr>
<tr><td>Peak</td><td>
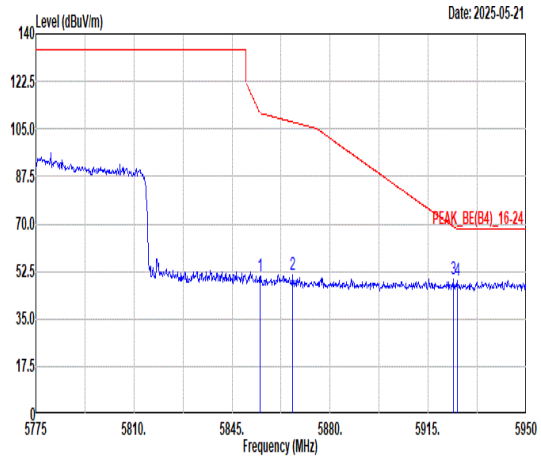

<table>
<tr><th></th><th>Freq</th><th>Level</th><th>Limit Line</th><th>Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr>
<tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td><td></td></tr>
<tr><td>1</td><td>5854.98</td><td>50.58</td><td>110.86</td><td>-60.28</td><td>39.75</td><td>34.84</td><td>8.87</td><td>32.88</td><td>127</td><td>334</td><td>PEAK</td></tr>
<tr><td>2</td><td>5866.53</td><td>51.09</td><td>107.57</td><td>-56.48</td><td>40.26</td><td>34.86</td><td>8.86</td><td>32.89</td><td>127</td><td>334</td><td>PEAK</td></tr>
<tr><td>3</td><td>5923.93</td><td>49.65</td><td>68.99</td><td>-19.34</td><td>38.83</td><td>34.96</td><td>8.79</td><td>32.93</td><td>127</td><td>334</td><td>PEAK</td></tr>
<tr><td>4</td><td>5925.33</td><td>49.28</td><td>68.30</td><td>-19.02</td><td>38.45</td><td>34.97</td><td>8.79</td><td>32.93</td><td>127</td><td>334</td><td>PEAK</td></tr>
</table>
</td><td>Blank</td></tr>
</table>

| Mode | 40 | |
|---|---|---|
| | Harmonic | |
| | U-NII-3_5.725-5.85_802.11be EHT80_CH155_Full_5775MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Vertical |
| Peak<br>Avg | 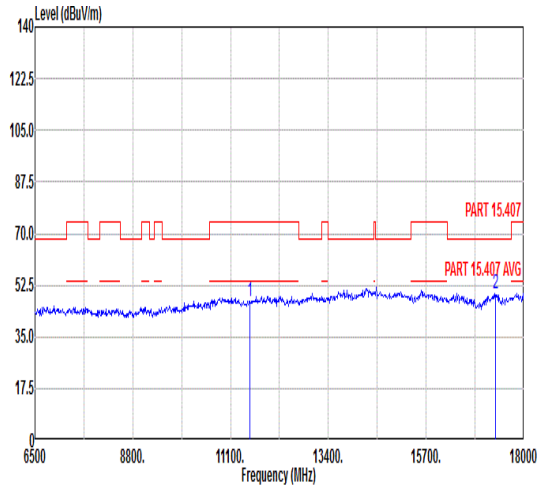 | 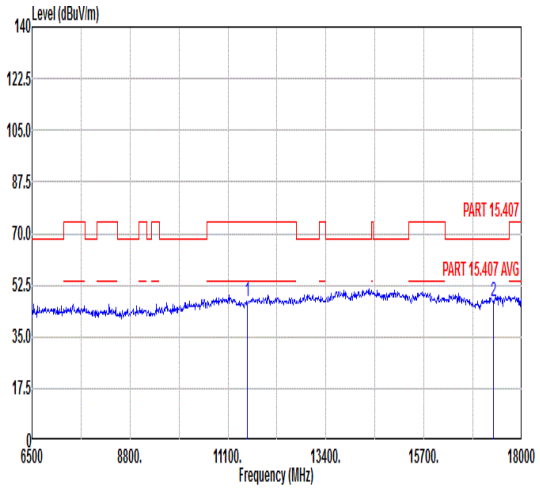 |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 11550.00 | 46.99 | 74.00 | -27.01 | 55.98 | 37.22 | 11.48 | 57.69 | --- | --- | Peak |
| 2 | 17325.00 | 49.43 | 68.30 | -18.87 | 52.64 | 41.44 | 13.19 | 57.84 | --- | --- | Peak |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 11550.00 | 47.25 | 74.00 | -26.75 | 56.24 | 37.22 | 11.48 | 57.69 | --- | --- | Peak |
| 2 | 17325.00 | 47.27 | 68.30 | -21.03 | 50.48 | 41.44 | 13.19 | 57.84 | --- | --- | Peak |

| Mode | 41 | |
|---|---|---|
| | Harmonic | |
| | U-NII-2C-3_5.47-5.85_802.11a_CH144_5720MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Vertical |
| Peak<br>Avg | 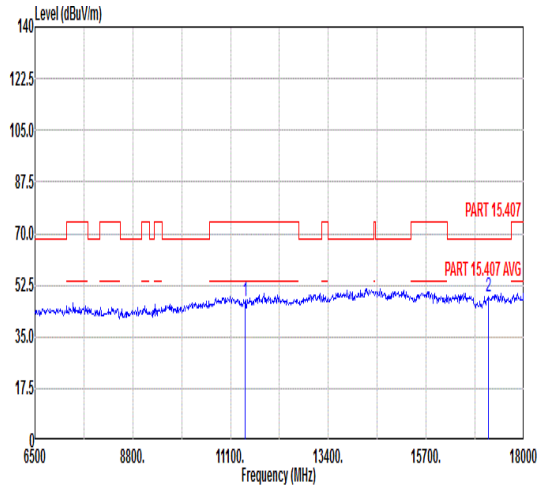 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 11440.00 47.28 74.00 -26.72 56.39 37.28 11.42 57.81 157 285 Peak<br>2 17160.00 48.64 68.30 -19.66 52.43 41.12 13.16 58.07 165 246 Peak | 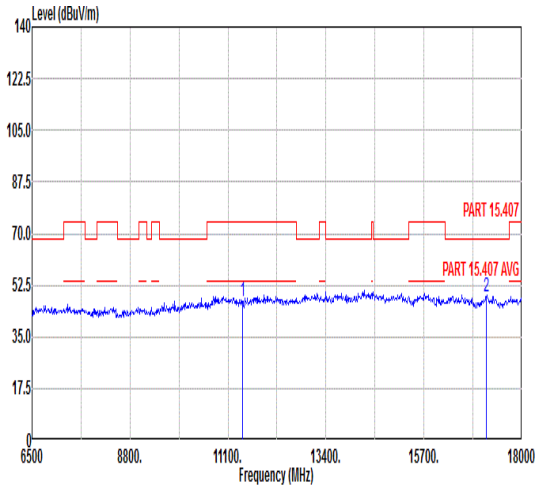 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 11440.00 47.07 74.00 -26.93 56.18 37.28 11.42 57.81 122 291 Peak<br>2 17160.00 48.61 68.30 -19.69 52.40 41.12 13.16 58.07 153 102 Peak |

| Mode | 42 | |
|---|---|---|
| | Harmonic | |
| | U-NII-2C-3_5.47-5.85_802.11be EHT20_CH144_Full_5720MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Vertical |
| Peak<br>Avg | 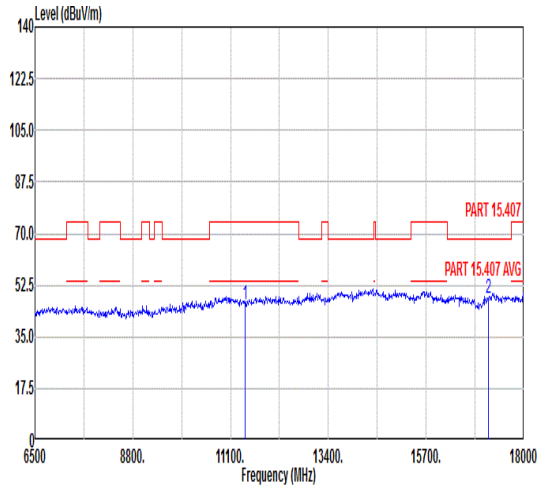 | 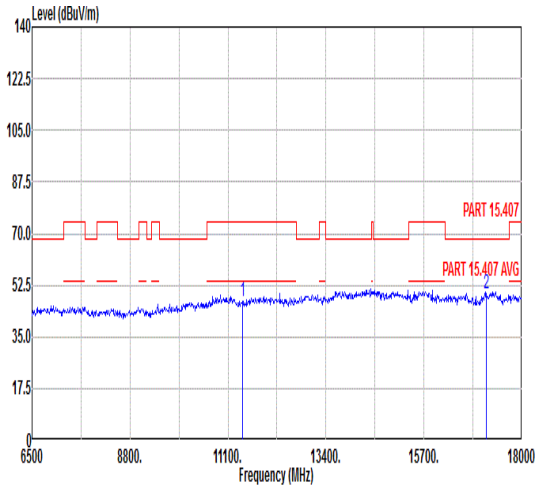 |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 11440.00 | 46.15 | 74.00 | -27.85 | 55.26 | 37.28 | 11.42 | 57.81 | --- | --- | Peak |
| 2 | 17160.00 | 48.30 | 68.30 | -20.00 | 52.09 | 41.12 | 13.16 | 58.07 | --- | --- | Peak |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 11440.00 | 47.11 | 74.00 | -26.89 | 56.22 | 37.28 | 11.42 | 57.81 | --- | --- | Peak |
| 2 | 17160.00 | 49.68 | 68.30 | -18.62 | 53.47 | 41.12 | 13.16 | 58.07 | --- | --- | Peak |

| Mode | 43 | |
|---|---|---|
| | Harmonic | |
| | U-NII-2C-3_5.47-5.85_802.11be EHT40_CH142_Full_5710MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Vertical |
| Peak<br>Avg | 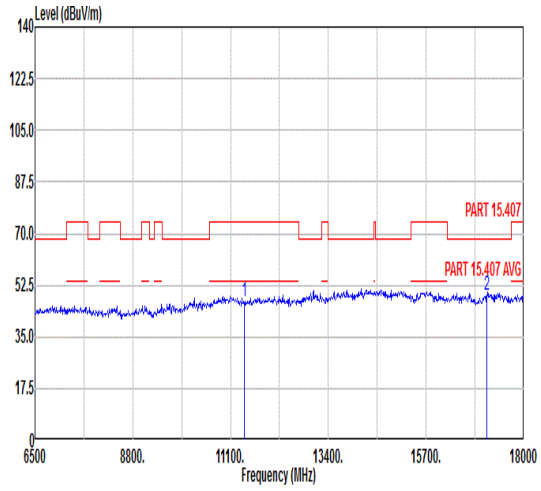 | 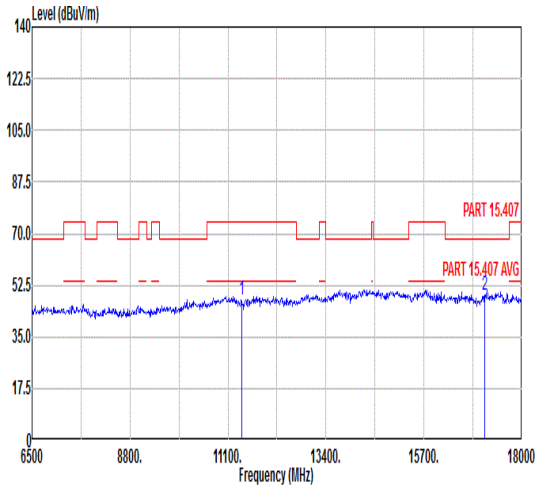 |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 11420.00 | 47.20 | 74.00 | -26.80 | 56.28 | 37.34 | 11.41 | 57.83 | --- | --- | Peak |
| 2 | 17130.00 | 49.34 | 68.30 | -18.96 | 53.24 | 41.06 | 13.15 | 58.11 | --- | --- | Peak |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 11420.00 | 47.31 | 74.00 | -26.69 | 56.39 | 37.34 | 11.41 | 57.83 | --- | --- | Peak |
| 2 | 17130.00 | 49.09 | 68.30 | -19.21 | 52.99 | 41.06 | 13.15 | 58.11 | --- | --- | Peak |

| Mode | 44 | |
|---|---|---|
| | Harmonic | |
| | U-NII-2C-3_5.47-5.85_802.11be EHT80_CH138_Full_5690MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Vertical |
| Peak<br>Avg | 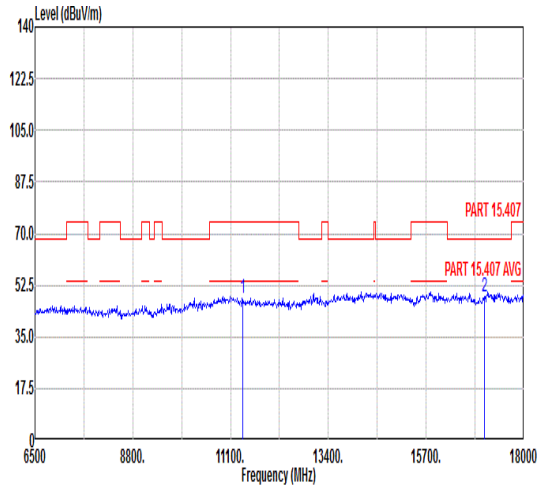 | 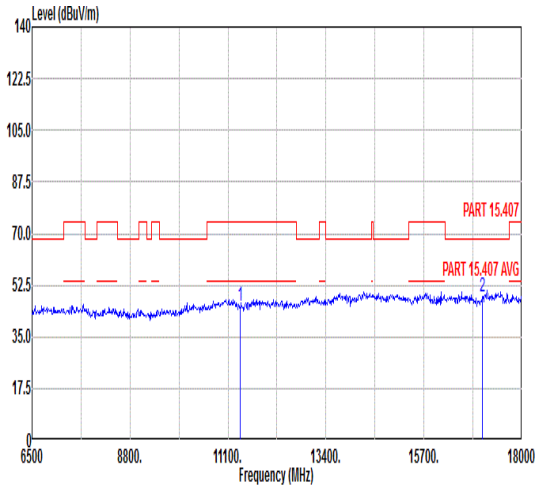 |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 11380.00 | 48.11 | 74.00 | -25.89 | 57.14 | 37.45 | 11.40 | 57.88 | 157 | 285 | Peak |
| 2 | 17070.00 | 48.52 | 68.30 | -19.78 | 52.64 | 40.94 | 13.14 | 58.20 | 165 | 246 | Peak |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 11380.00 | 45.42 | 74.00 | -28.58 | 54.45 | 37.45 | 11.40 | 57.88 | 122 | 291 | Peak |
| 2 | 17070.00 | 48.58 | 68.30 | -19.72 | 52.70 | 40.94 | 13.14 | 58.20 | 153 | 102 | Peak |

| Mode | 45 | |
|---|---|---|
| | Band Edge | |
| | U-NII-1_5.15-5.25_802.11be EHT20_CH36_Single RU26/0_5180MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |

**Peak**




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5083.52 | 48.96 | 74.00 | -25.04 | 39.91 | 33.95 | 7.87 | 32.77 | 151 | 174 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5180.00 | 104.73 | ------ | ------ | 95.53 | 34.00 | 7.93 | 32.73 | 151 | 174 | PEAK |

**Avg**

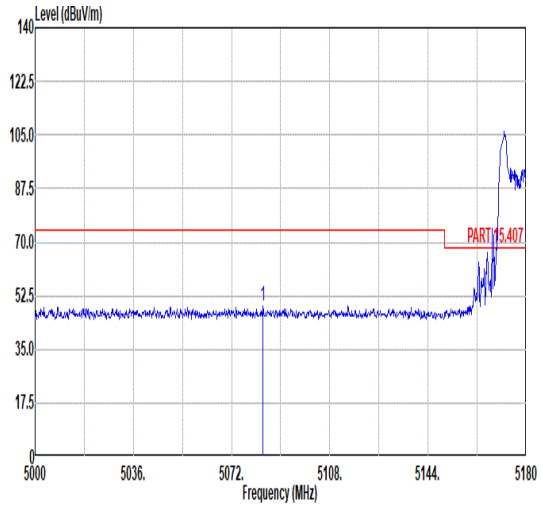


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5020.52 | 39.44 | 54.00 | -14.56 | 30.48 | 33.92 | 7.83 | 32.79 | 151 | 174 | AVERAGE |

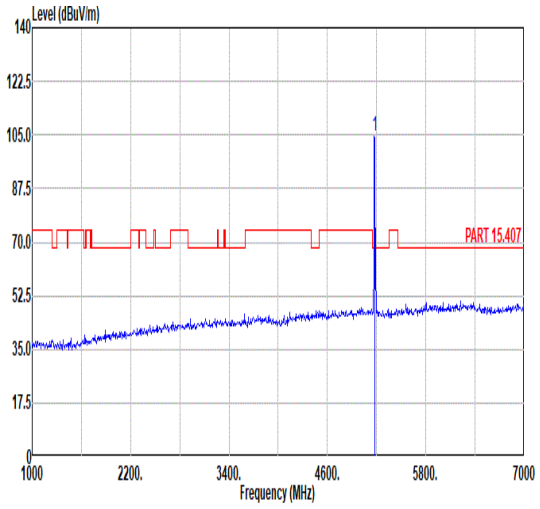


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5180.00 | 98.02 | ------ | ------ | 88.82 | 34.00 | 7.93 | 32.73 | 151 | 174 | AVERAGE |

| Mode | 45 | |
|---|---|---|
| | Band Edge | |
| | U-NII-1_5.15-5.25_802.11be EHT20_CH36_Single RU26/0_5180MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |

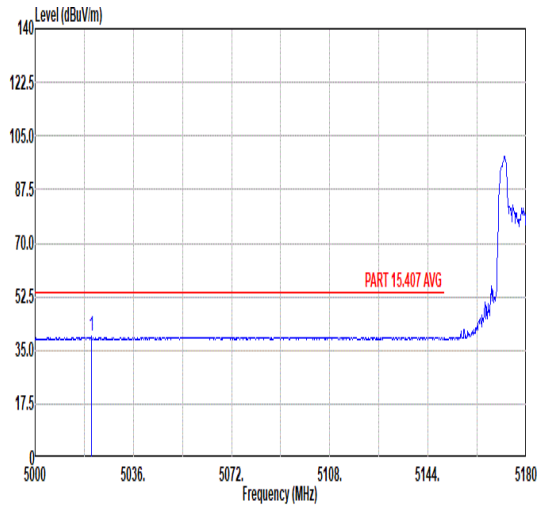**Peak**

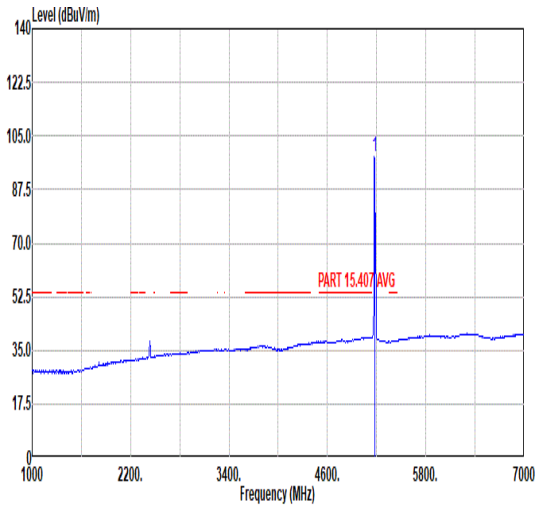


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5070.92 | 50.08 | 74.00 | -23.92 | 41.04 | 33.94 | 7.87 | 32.77 | 125 | 282 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5180.00 | 99.22 | ------ | ------ | 90.02 | 34.00 | 7.93 | 32.73 | 125 | 282 | PEAK |

**Avg**

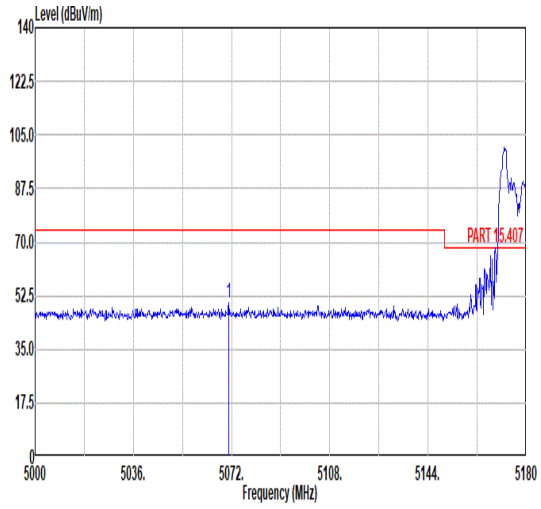


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5070.38 | 39.40 | 54.00 | -14.60 | 30.36 | 33.94 | 7.87 | 32.77 | 125 | 282 | AVERAGE |

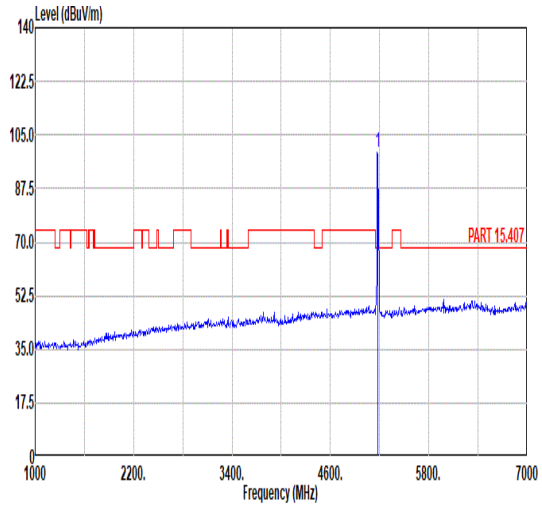


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5180.00 | 93.76 | ------ | ------ | 84.56 | 34.00 | 7.93 | 32.73 | 125 | 282 | AVERAGE |

| Mode | 46 | |
|---|---|---|
| | Band Edge | |
| | U-NII-2A_5.15-5.25_802.11be EHT20_CH64_Single RU106/54_5320MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |

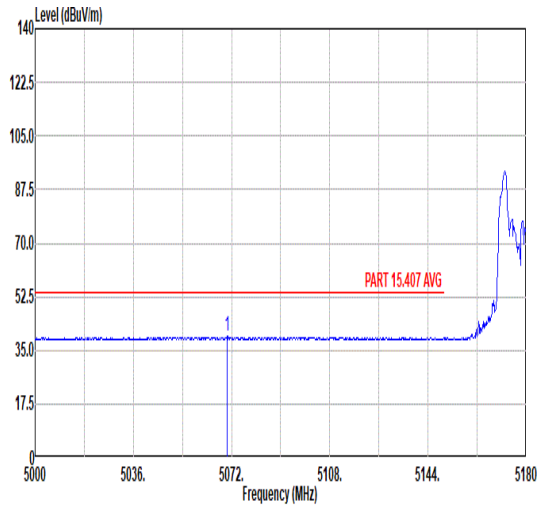**Peak**

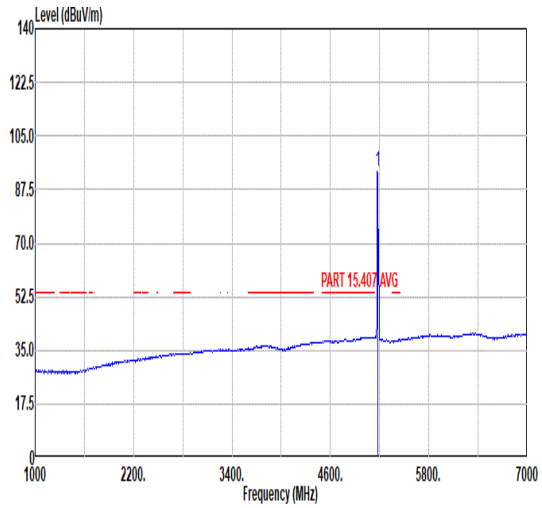


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5422.34 | 48.81 | 74.00 | -25.19 | 38.83 | 34.15 | 8.46 | 32.63 | 176 | 217 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5320.00 | 104.33 | ------ | ------ | 94.66 | 34.09 | 8.25 | 32.67 | 176 | 217 | PEAK |

**Avg**

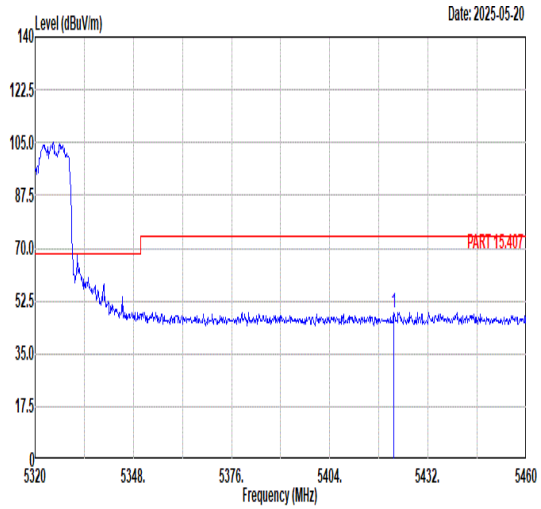


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5350.10 | 39.99 | 54.00 | -14.01 | 30.21 | 34.11 | 8.33 | 32.66 | 176 | 217 | AVERAGE |

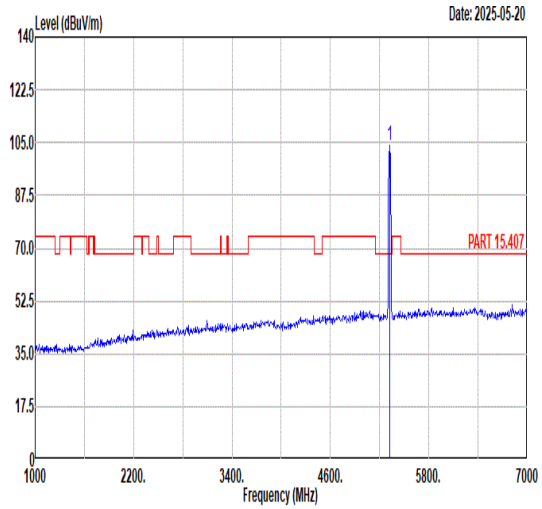


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5320.00 | 96.27 | ------ | ------ | 86.60 | 34.09 | 8.25 | 32.67 | 176 | 217 | AVERAGE |

| Mode | 46 | |
|---|---|---|
| | Band Edge | |
| | U-NII-2A_5.15-5.25_802.11be EHT20_CH64_Single RU106/54_5320MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |

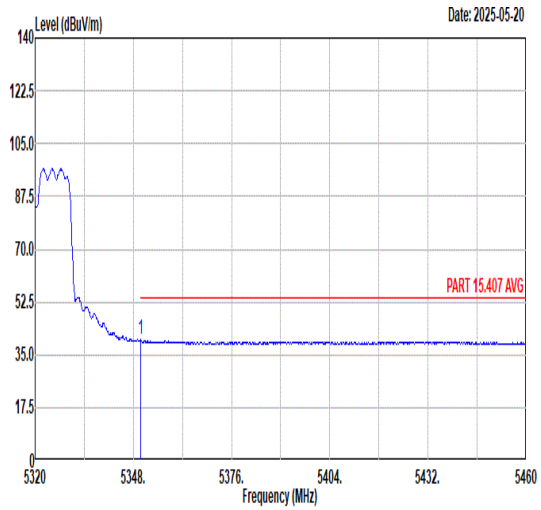**Peak**

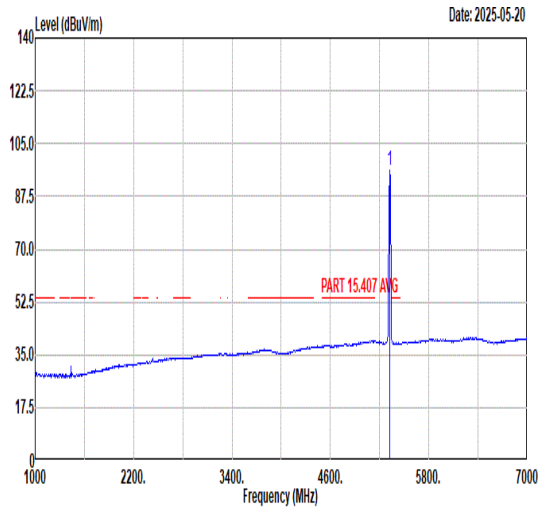


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5403.30 | 49.19 | 74.00 | -24.81 | 39.22 | 34.14 | 8.47 | 32.64 | 128 | 284 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5320.00 | 102.58 | ------ | ------ | 92.90 | 34.09 | 8.26 | 32.67 | 128 | 284 | PEAK |

**Avg**

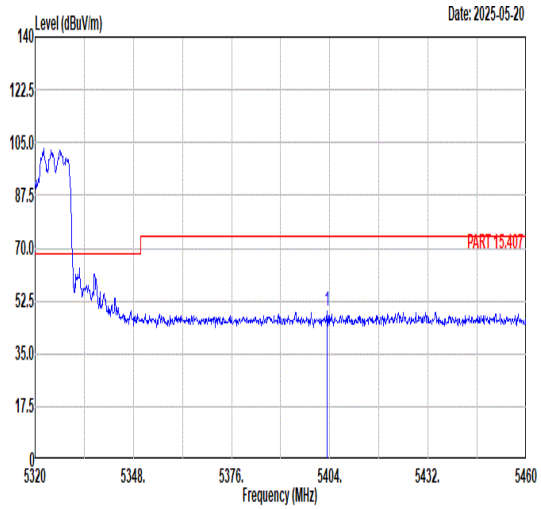


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5350.10 | 39.36 | 54.00 | -14.64 | 29.58 | 34.11 | 8.33 | 32.66 | 128 | 284 | AVERAGE |

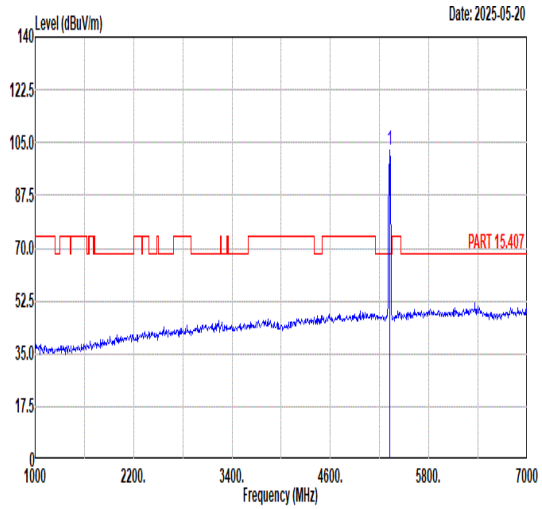


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5320.00 | 94.13 | ------ | ------ | 84.45 | 34.09 | 8.26 | 32.67 | 128 | 284 | AVERAGE |

| Mode | 47 | |
|---|---|---|
| | Band Edge | |
| | U-NII-2C_5.25-5.35_802.11be EHT20_CH100_Single RU106/53_5500MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |

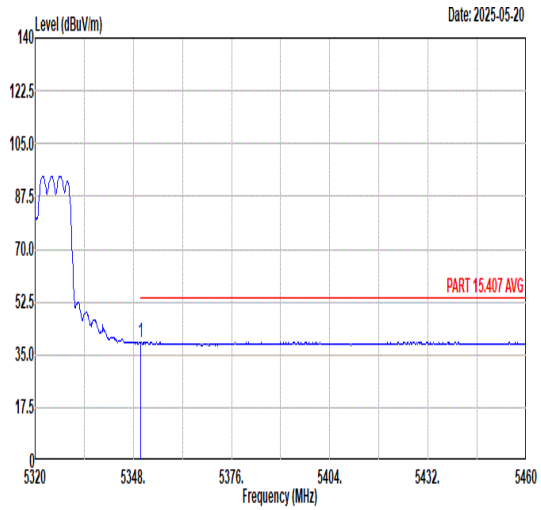**Peak**

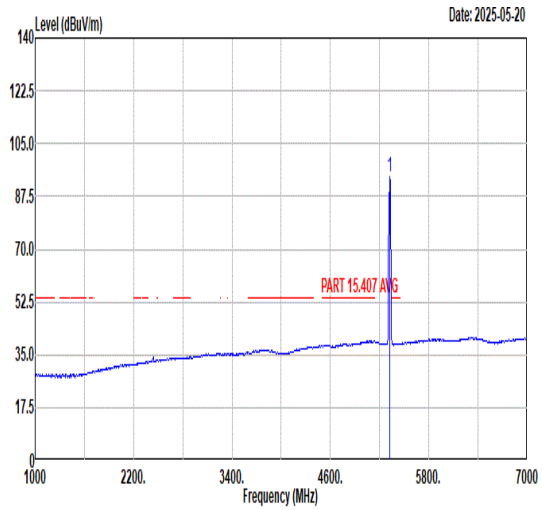


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5455.45 | 49.07 | 74.00 | -24.93 | 39.09 | 34.17 | 8.42 | 32.61 | 179 | 220 | PEAK |
| 2 | 5466.25 | 48.59 | 68.30 | -19.71 | 38.62 | 34.18 | 8.40 | 32.61 | 179 | 220 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5500.00 | 103.46 | ------ | ------ | 93.51 | 34.19 | 8.36 | 32.60 | 179 | 220 | PEAK |

**Avg**

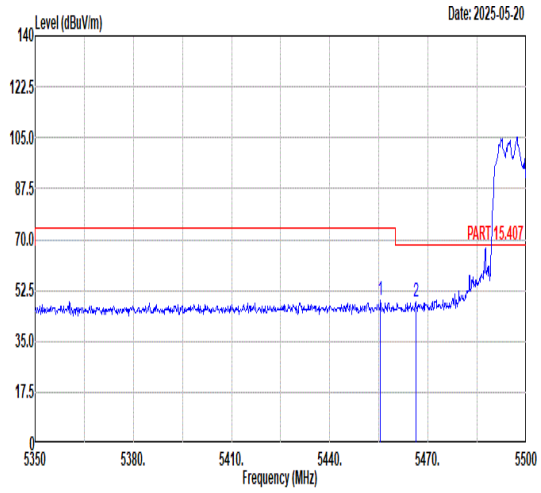


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5427.40 | 39.26 | 54.00 | -14.74 | 29.29 | 34.15 | 8.45 | 32.63 | 179 | 220 | AVERAGE |

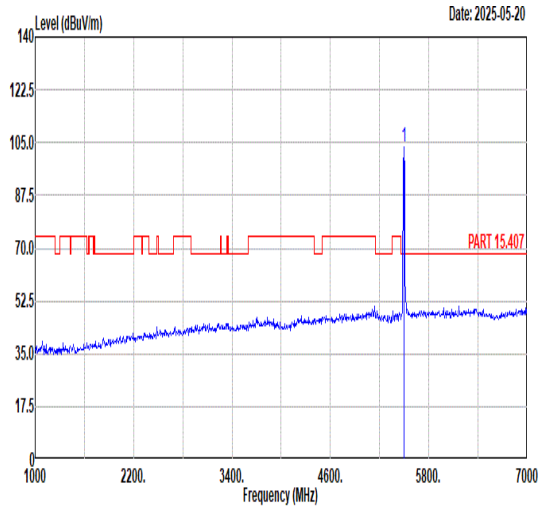


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5500.00 | 95.62 | ------ | ------ | 85.67 | 34.19 | 8.36 | 32.60 | 179 | 220 | AVERAGE |

| Mode | 47 | |
|---|---|---|
| | Band Edge | |
| | U-NII-2C_5.25-5.35_802.11be EHT20_CH100_Single RU106/53_5500MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |

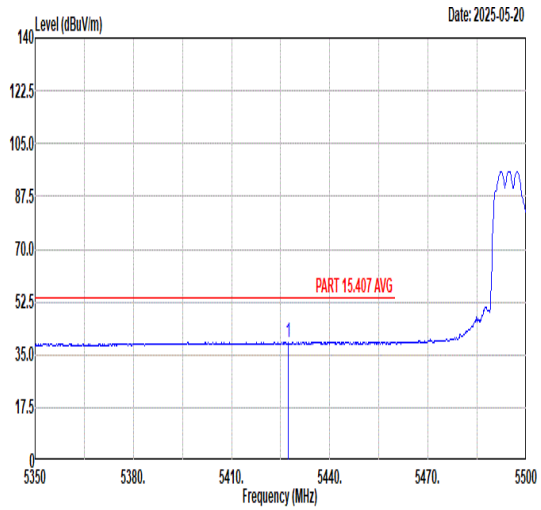**Peak**

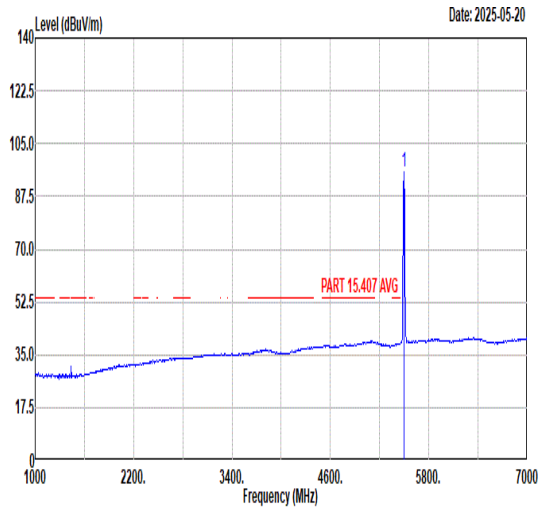


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5439.40 | 48.49 | 74.00 | -25.51 | 38.51 | 34.16 | 8.44 | 32.62 | 116 | 216 | PEAK |
| 2 | 5469.25 | 49.07 | 68.30 | -19.23 | 39.10 | 34.18 | 8.40 | 32.61 | 116 | 216 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5500.00 | 103.94 | ------ | ------ | 93.99 | 34.19 | 8.36 | 32.60 | 116 | 216 | PEAK |

**Avg**

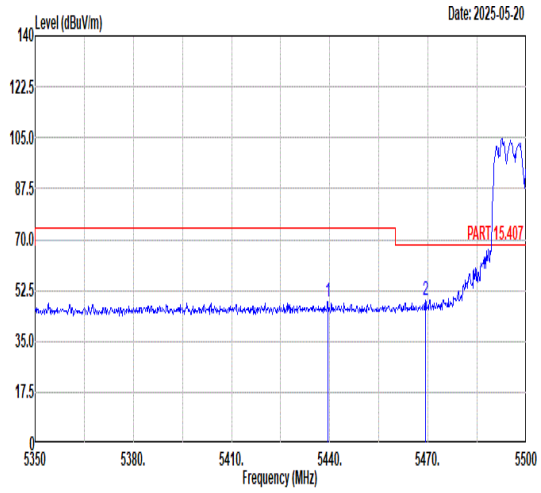


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5455.15 | 39.23 | 54.00 | -14.77 | 29.25 | 34.17 | 8.42 | 32.61 | 116 | 216 | AVERAGE |

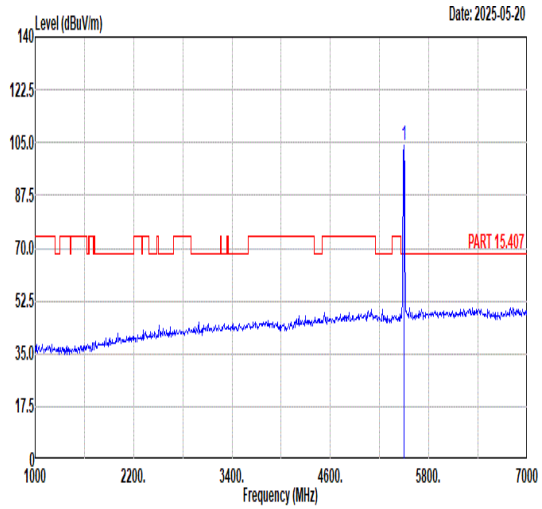


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5500.00 | 95.80 | ------ | ------ | 85.85 | 34.19 | 8.36 | 32.60 | 116 | 216 | AVERAGE |

| Mode | 48 | |
|---|---|---|
| | Band Edge | |
| | U-NII-2C_5.25-5.35_802.11be EHT20_CH140_Single RU 52/40 _5700MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 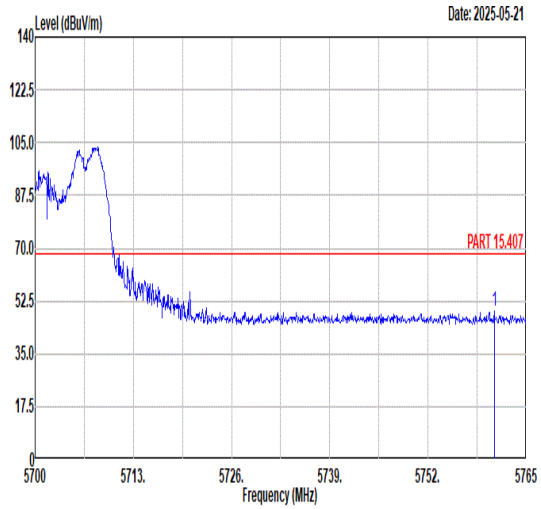 | 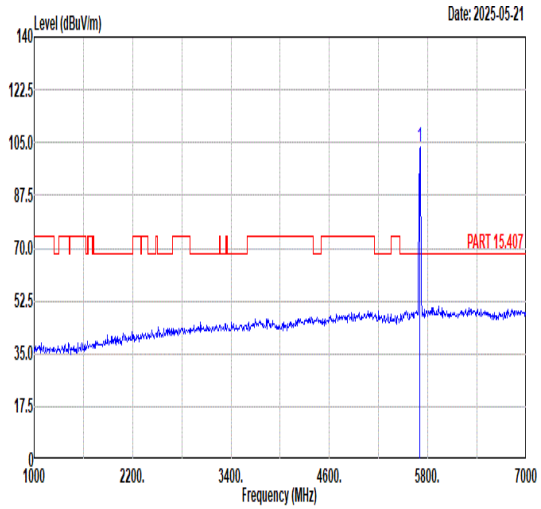 |
| Avg | Blank | 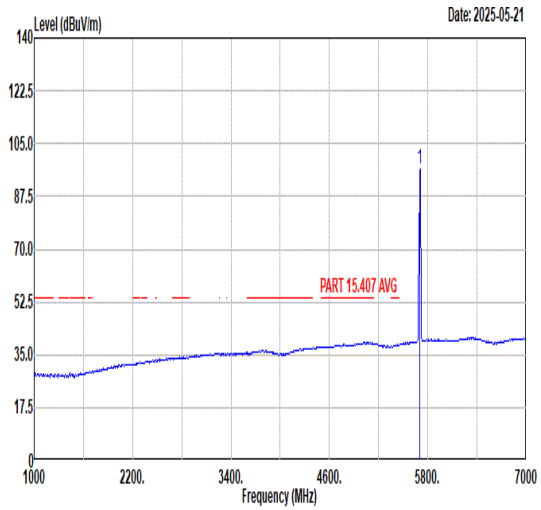 |

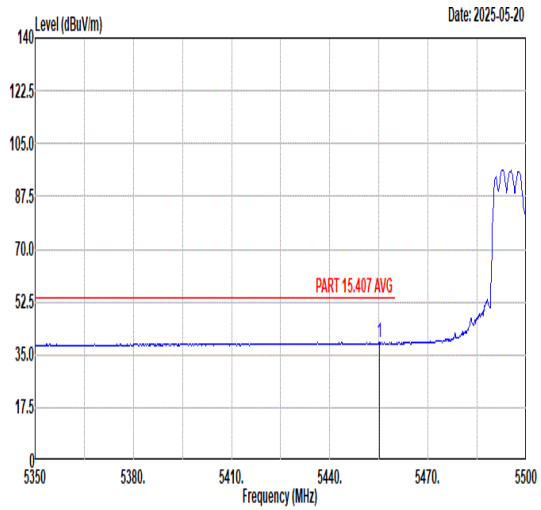

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5760.78 | 49.14 | 68.30 | -19.16 | 38.47 | 34.67 | 8.81 | 32.81 | 131 | 0 | PEAK |

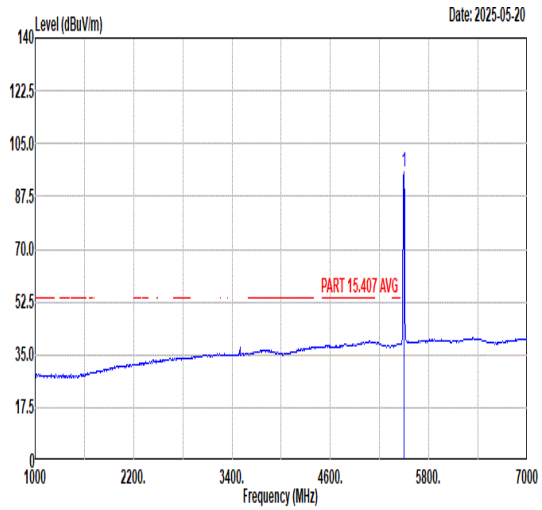

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5700.00 | 103.50 | ------ | ------ | 93.08 | 34.57 | 8.62 | 32.77 | 131 | 0 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5700.00 | 96.85 | ------ | ------ | 86.43 | 34.57 | 8.62 | 32.77 | 131 | 0 | AVERAGE |

| Mode | 48 | |
|---|---|---|
| | Band Edge | |
| | U-NII-2C_5.25-5.35_802.11be EHT20_CH140_Single RU 52/40 _5700MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 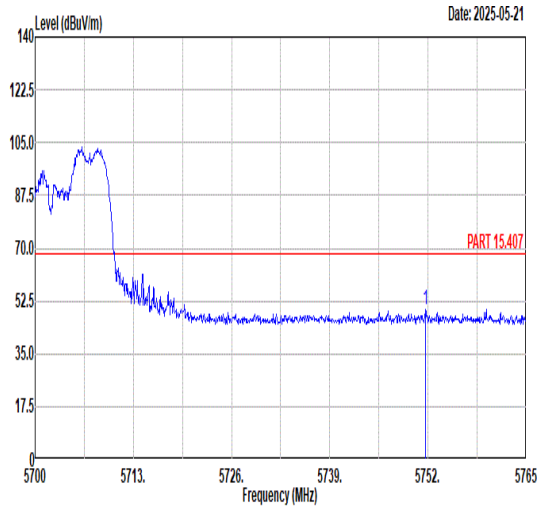 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5751.68 49.64 68.30 -18.66 39.02 34.65 8.77 32.80 177 70 PEAK | 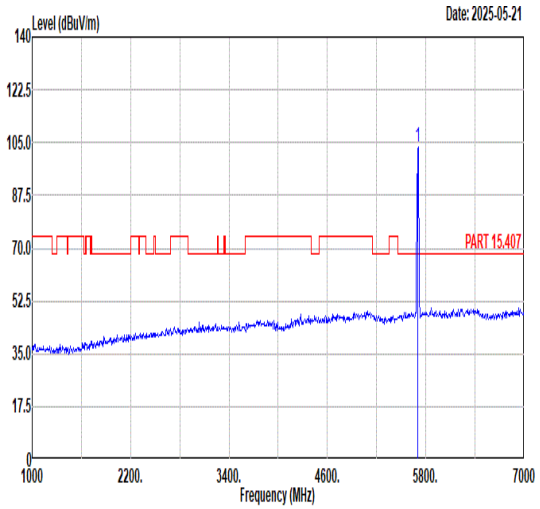 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5700.00 103.35 ------ ------ 92.93 34.57 8.62 32.77 177 70 PEAK |
| Avg | Blank | 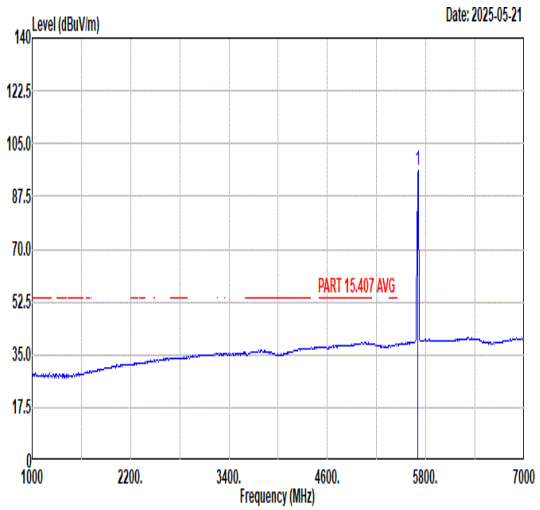 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5700.00 96.21 ------ ------ 85.79 34.57 8.62 32.77 177 70 AVERAGE |

| Mode | 49 | |
|---|---|---|
| | Band Edge | |
| | U-NII-3_5.725-5.85_802.11be EHT20_CH149_Single RU26/0_5745MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 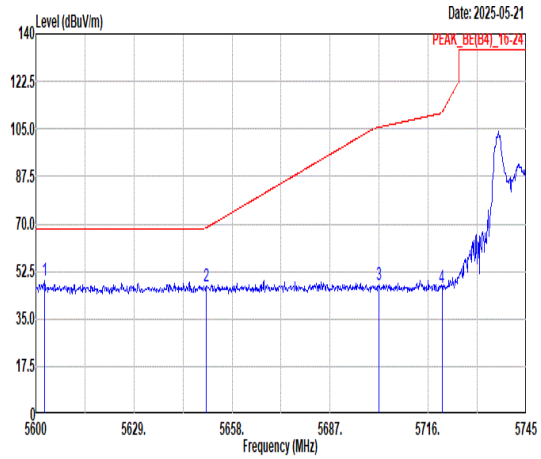 | 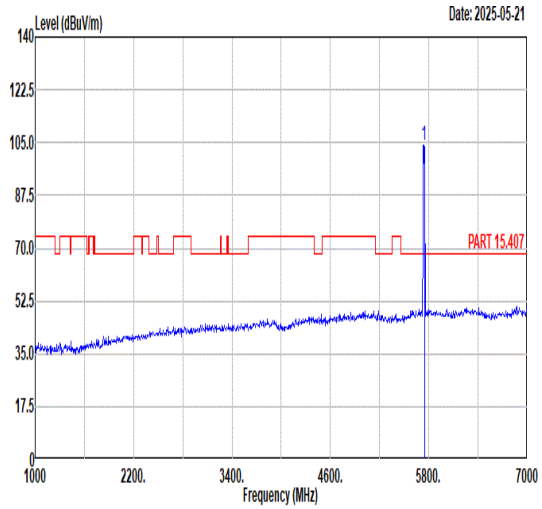 |
| Avg | Blank | 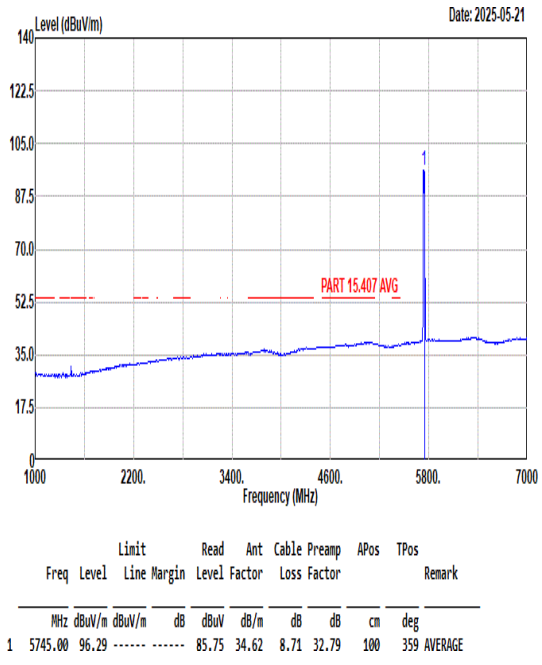 |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5602.61 | 48.87 | 68.30 | -19.43 | 38.96 | 34.38 | 8.22 | 32.69 | 100 | 359 | PEAK |
| 2 | 5650.46 | 46.97 | 68.64 | -21.67 | 36.82 | 34.47 | 8.40 | 32.72 | 100 | 359 | PEAK |
| 3 | 5701.50 | 47.51 | 105.62 | -58.11 | 37.12 | 34.56 | 8.59 | 32.76 | 100 | 359 | PEAK |
| 4 | 5720.06 | 46.62 | 110.94 | -64.32 | 36.15 | 34.59 | 8.66 | 32.78 | 100 | 359 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5745.00 | 103.94 | ------ | ------ | 93.37 | 34.63 | 8.73 | 32.79 | 100 | 359 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5745.00 | 96.29 | ------ | ------ | 85.75 | 34.62 | 8.71 | 32.79 | 100 | 359 | AVERAGE |

| Mode | 49 | |
|---|---|---|
| | Band Edge | |
| | U-NII-3_5.725-5.85_802.11be EHT20_CH149_Single RU26/0_5745MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 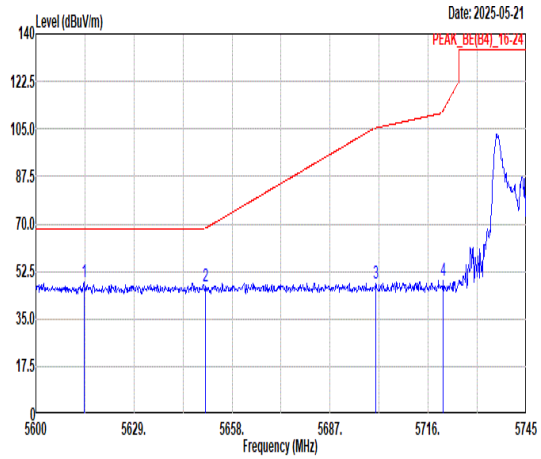 | 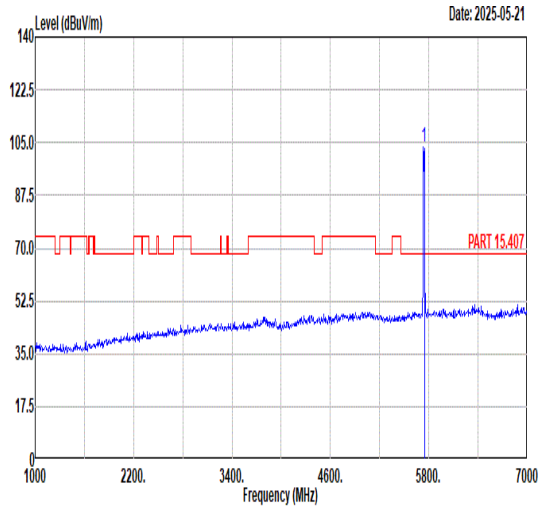 |
| Avg | Blank | 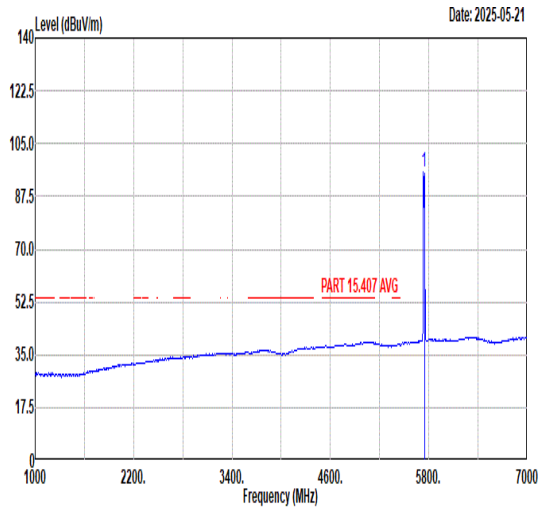 |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5614.21 | 48.37 | 68.30 | -19.93 | 38.39 | 34.40 | 8.27 | 32.69 | 108 | 334 | PEAK |
| 2 | 5650.03 | 47.02 | 68.32 | -21.30 | 36.88 | 34.46 | 8.40 | 32.72 | 108 | 334 | PEAK |
| 3 | 5700.49 | 47.90 | 105.34 | -57.44 | 37.52 | 34.56 | 8.58 | 32.76 | 108 | 334 | PEAK |
| 4 | 5720.50 | 49.18 | 111.93 | -62.75 | 38.71 | 34.59 | 8.66 | 32.78 | 108 | 334 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5745.00 | 103.56 | ------ | ------ | 93.02 | 34.62 | 8.71 | 32.79 | 108 | 334 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5745.00 | 95.49 | ------ | ------ | 84.95 | 34.62 | 8.71 | 32.79 | 108 | 334 | AVERAGE |

| Mode | 50 | |
|---|---|---|
| | Band Edge | |
| | U-NII-3_5.725-5.85_802.11be EHT20_CH165_Single RU26/8_5825MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 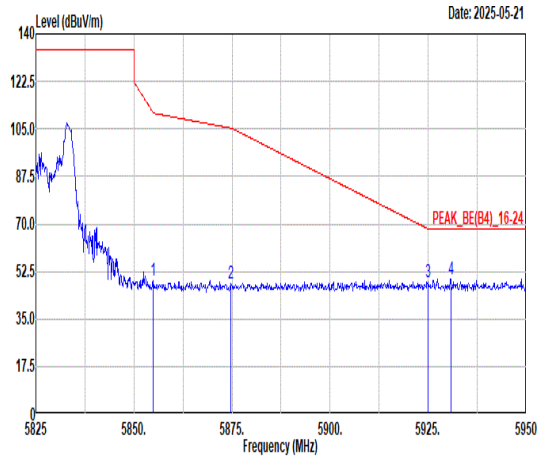 | 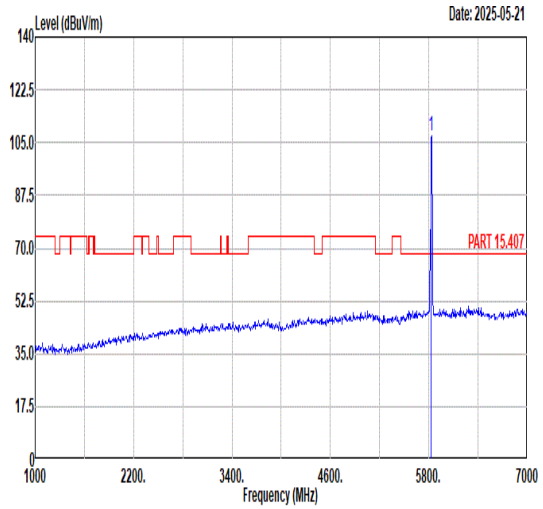 |
| Avg | Blank | 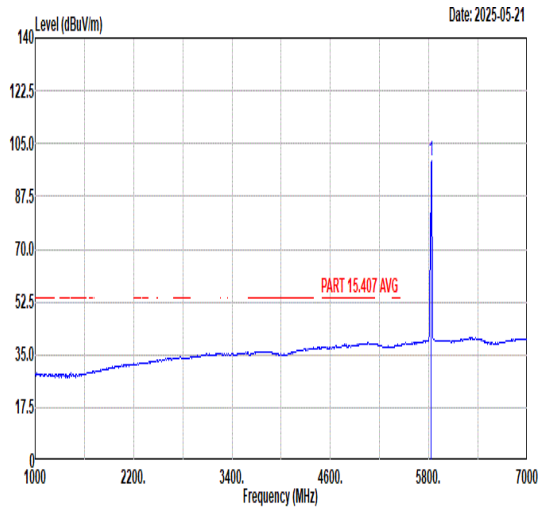 |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5854.88 | 48.96 | 111.08 | -62.12 | 38.13 | 34.84 | 8.87 | 32.88 | 150 | 125 | PEAK |
| 2 | 5874.75 | 48.16 | 105.27 | -57.11 | 37.32 | 34.88 | 8.85 | 32.89 | 150 | 125 | PEAK |
| 3 | 5925.00 | 48.61 | 68.20 | -19.59 | 37.78 | 34.97 | 8.79 | 32.93 | 150 | 125 | PEAK |
| 4 | 5930.75 | 49.80 | 68.30 | -18.50 | 38.98 | 34.98 | 8.78 | 32.94 | 150 | 125 | PEAK |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5825.00 | 107.34 | ------ | ------ | 96.51 | 34.80 | 8.89 | 32.86 | 150 | 125 | PEAK |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5825.00 | 99.46 | ------ | ------ | 88.63 | 34.80 | 8.89 | 32.86 | 150 | 125 | AVERAGE |

| Mode | 50 | |
|---|---|---|
| | Band Edge | |
| | U-NII-3_5.725-5.85_802.11be EHT20_CH165_Single RU26/8_5825MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 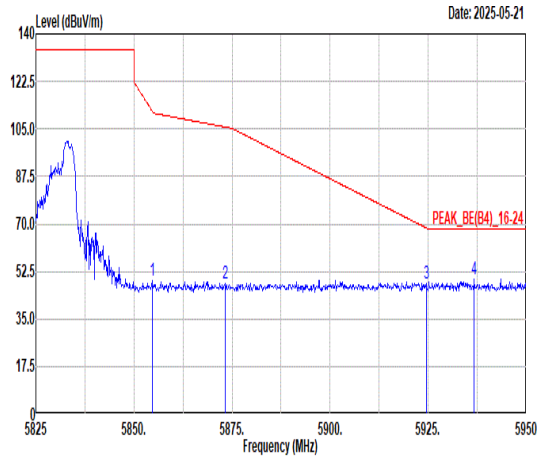 | 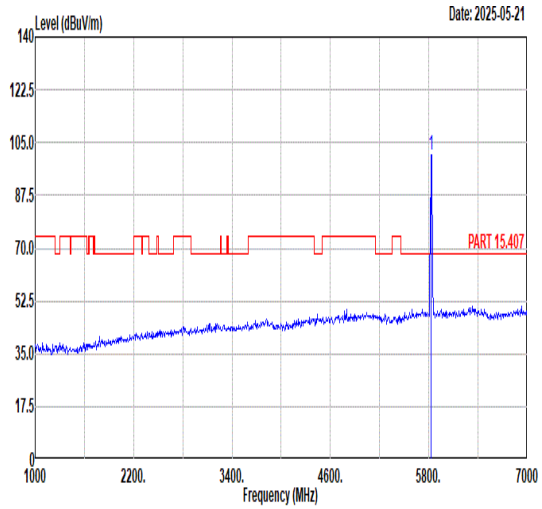 |
| Avg | Blank | 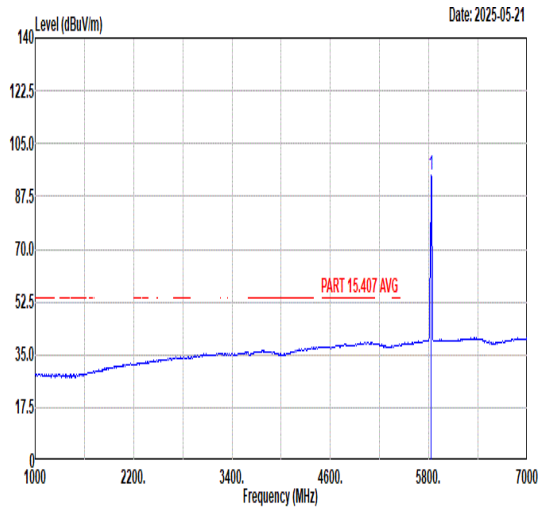 |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5854.63 | 48.89 | 111.65 | -62.76 | 38.06 | 34.84 | 8.87 | 32.88 | 182 | 63 | PEAK |
| 2 | 5873.25 | 48.22 | 105.69 | -57.47 | 37.39 | 34.87 | 8.85 | 32.89 | 182 | 63 | PEAK |
| 3 | 5924.50 | 47.84 | 68.57 | -20.73 | 37.01 | 34.97 | 8.79 | 32.93 | 182 | 63 | PEAK |
| 4 | 5936.75 | 49.58 | 68.30 | -18.72 | 38.75 | 34.99 | 8.78 | 32.94 | 182 | 63 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5825.00 | 101.04 | ------ | ------ | 90.21 | 34.79 | 8.90 | 32.86 | 182 | 63 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5825.00 | 94.46 | ------ | ------ | 83.63 | 34.79 | 8.90 | 32.86 | 182 | 63 | AVERAGE |

| Mode | 51 | |
|---|---|---|
| | Band Edge | |
| | U-NII-1_5.15-5.25_802.11be EHT20_CH36_Small RU 106+26/ 53+4_5180MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |

**Peak**




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5146.52 | 51.62 | 74.00 | -22.38 | 42.45 | 33.99 | 7.92 | 32.74 | 196 | 123 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5180.00 | 106.27 | ------ | ------ | 97.05 | 34.01 | 7.94 | 32.73 | 196 | 123 | PEAK |

**Avg**

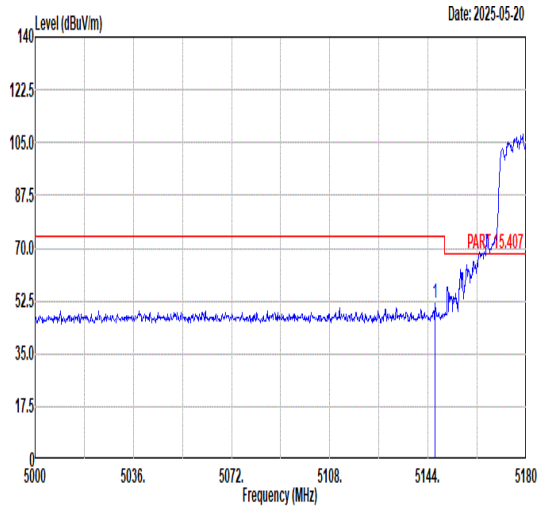


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5146.52 | 40.47 | 54.00 | -13.53 | 31.30 | 33.99 | 7.92 | 32.74 | 196 | 123 | AVERAGE |

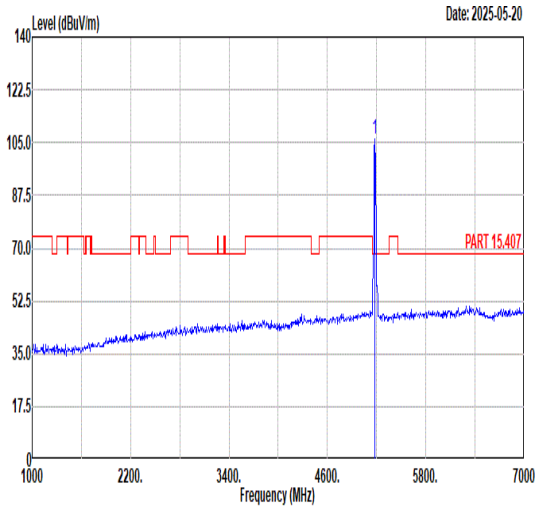


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5180.00 | 99.11 | ------ | ------ | 89.89 | 34.01 | 7.94 | 32.73 | 196 | 123 | AVERAGE |

| Mode | 51 | |
|---|---|---|
| | Band Edge | |
| | U-NII-1_5.15-5.25_802.11be EHT20_CH36_Small RU 106+26/ 53+4_5180MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |

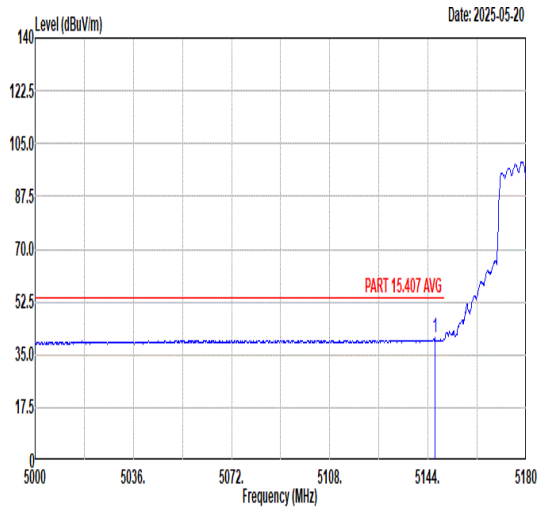**Peak**

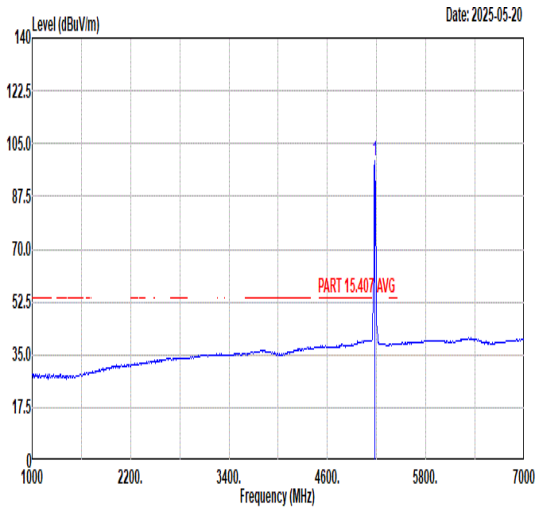


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5064.44 | 49.09 | 74.00 | -24.91 | 40.06 | 33.94 | 7.86 | 32.77 | 149 | 215 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5180.00 | 101.18 | ------ | ------ | 91.96 | 34.01 | 7.94 | 32.73 | 149 | 215 | PEAK |

**Avg**

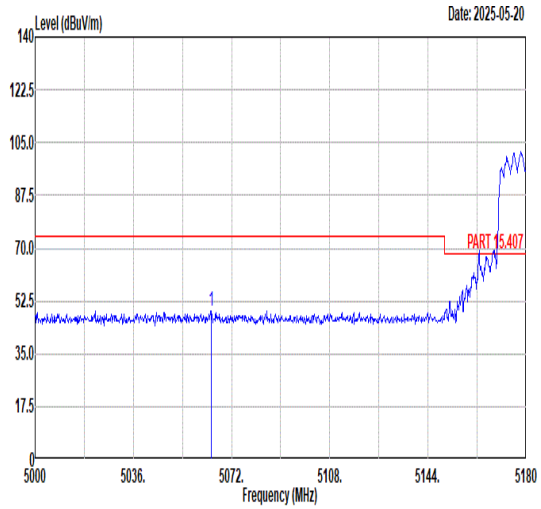


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5083.70 | 39.41 | 54.00 | -14.59 | 30.36 | 33.95 | 7.87 | 32.77 | 149 | 215 | AVERAGE |

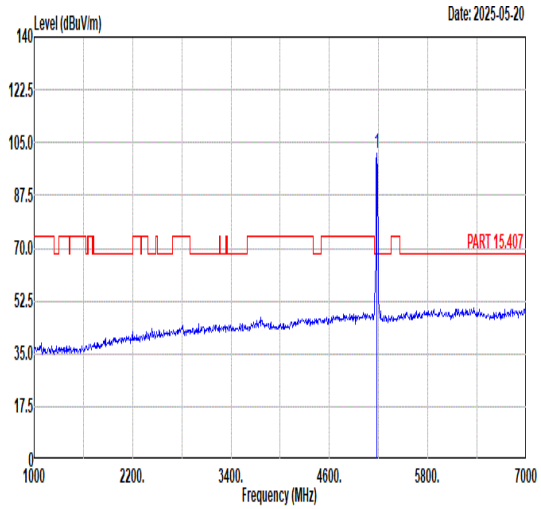


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5180.00 | 94.31 | ------ | ------ | 85.09 | 34.01 | 7.94 | 32.73 | 149 | 215 | AVERAGE |

| Mode | 52 | |
|---|---|---|
| | Band Edge | |
| | U-NII-2A_5.25-5.35_802.11be EHT20_CH64_Small RU 106+26/54+4_5320MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |

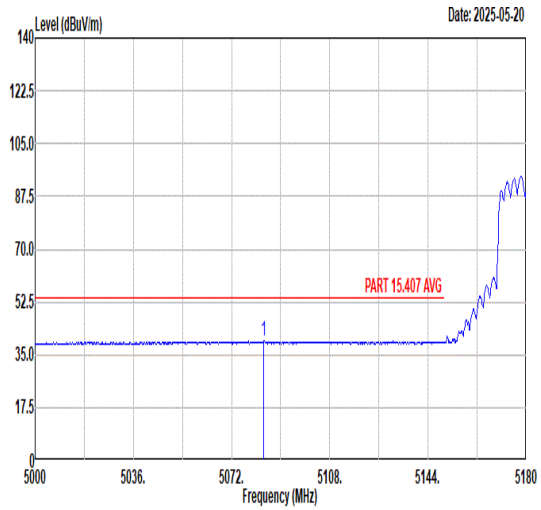**Peak**

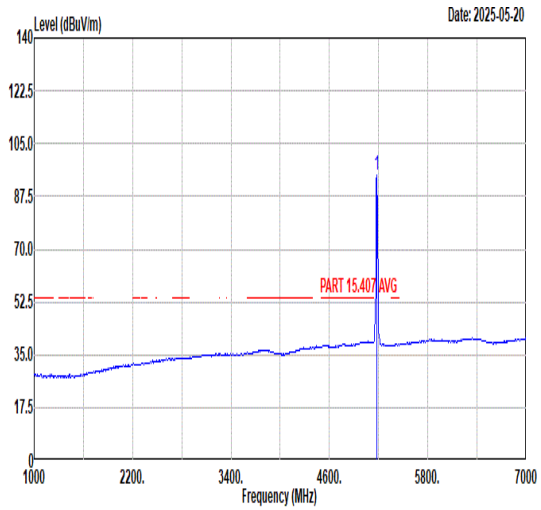


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5350.52 | 50.96 | 74.00 | -23.04 | 41.18 | 34.11 | 8.33 | 32.66 | 197 | 133 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5320.00 | 107.37 | ------ | ------ | 97.70 | 34.09 | 8.25 | 32.67 | 197 | 133 | PEAK |

**Avg**

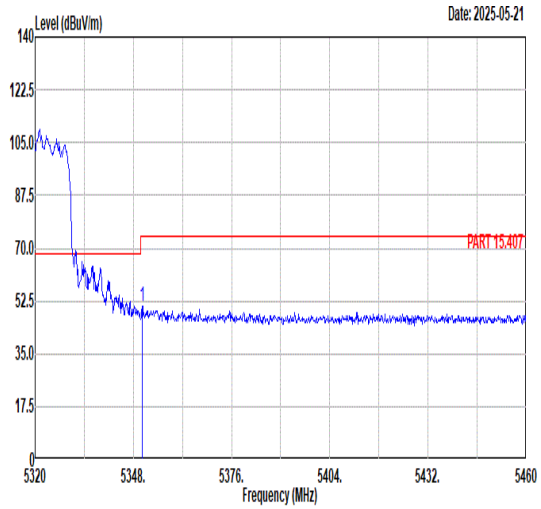


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5353.88 | 40.54 | 54.00 | -13.46 | 30.75 | 34.11 | 8.34 | 32.66 | 197 | 133 | AVERAGE |

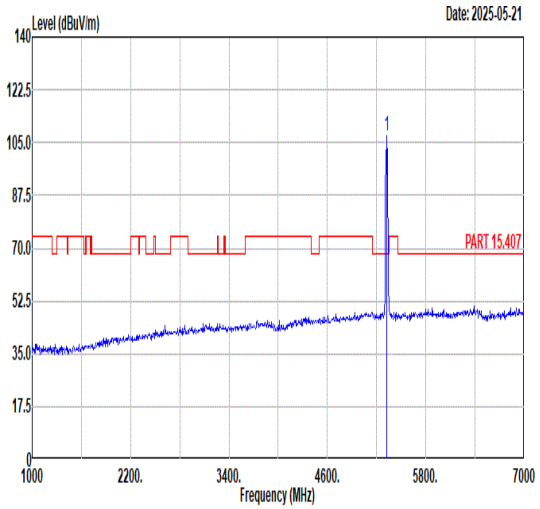


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5320.00 | 99.82 | ------ | ------ | 90.15 | 34.09 | 8.25 | 32.67 | 197 | 133 | AVERAGE |

| Mode | 52 | |
|---|---|---|
| | Band Edge | |
| | U-NII-2A_5.25-5.35_802.11be EHT20_CH64_Small RU 106+26/54+4_5320MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |

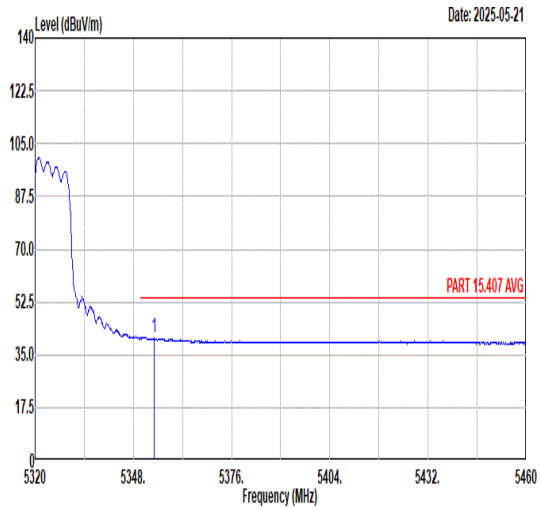**Peak**

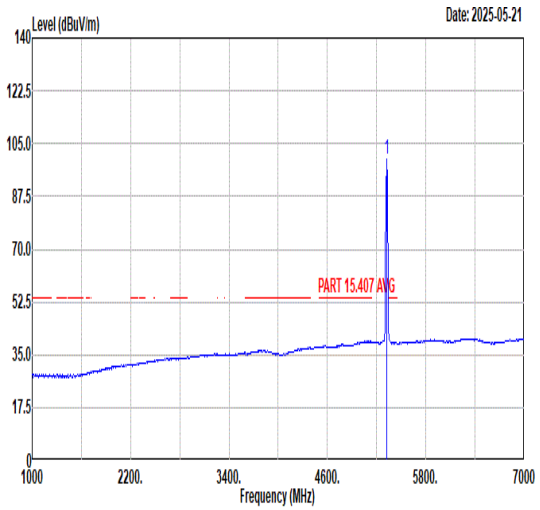


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5436.48 | 48.82 | 74.00 | -25.18 | 38.84 | 34.16 | 8.44 | 32.62 | 251 | 234 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5320.00 | 103.02 | ------ | ------ | 93.35 | 34.09 | 8.25 | 32.67 | 251 | 234 | PEAK |

**Avg**

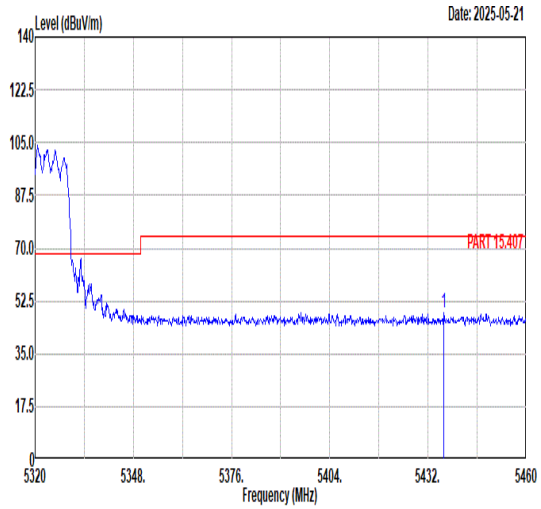


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5437.60 | 39.03 | 54.00 | -14.97 | 29.05 | 34.16 | 8.44 | 32.62 | 251 | 234 | AVERAGE |

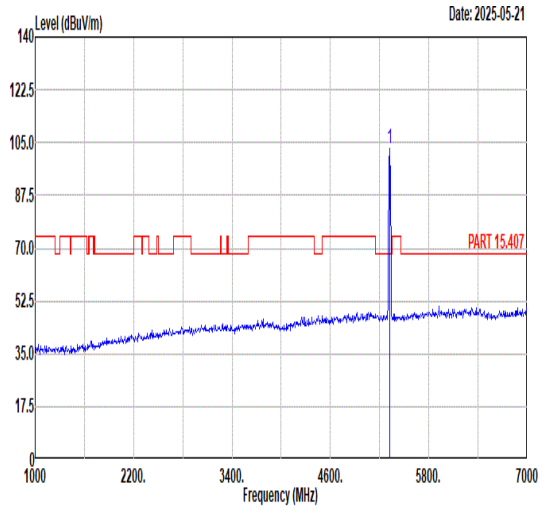


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5320.00 | 95.39 | ------ | ------ | 85.72 | 34.09 | 8.25 | 32.67 | 251 | 234 | AVERAGE |

| Mode | 53 |
|---|---|
| | Band Edge |
| | U-NII-2C_5.47-5.725_802.11be EHT20_CH100_Small RU 106+26/ 53+4_5500MHz |
| ANT | CDD 6+17 |
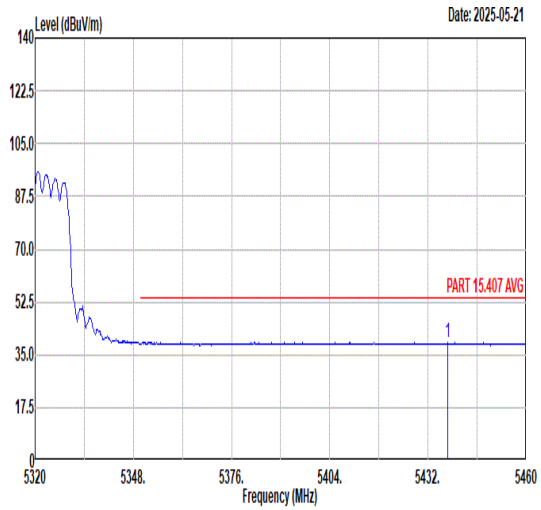
| Pol. | Horizontal | Fundamental |
|---|---|---|

**Peak**

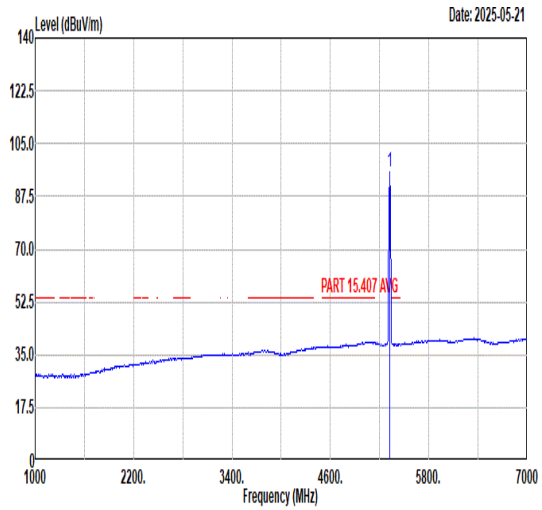


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5444.50 | 49.84 | 74.00 | -24.16 | 39.87 | 34.16 | 8.43 | 32.62 | 325 | 1 | PEAK |
| 2 | 5470.00 | 48.40 | 68.30 | -19.90 | 38.43 | 34.18 | 8.40 | 32.61 | 325 | 1 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5500.00 | 102.46 | ------ | ------ | 92.51 | 34.20 | 8.36 | 32.61 | 325 | 1 | PEAK |

**Avg**

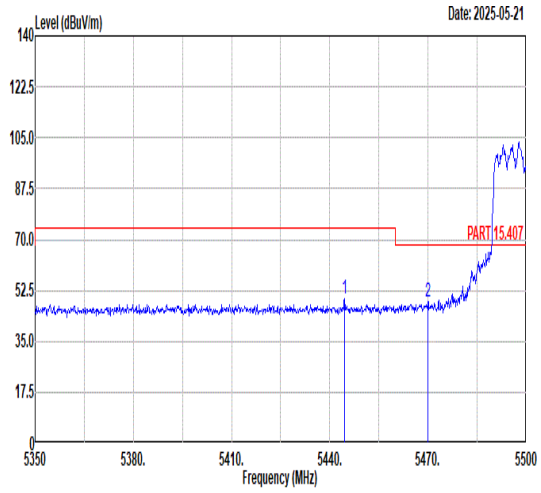


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5458.30 | 38.97 | 54.00 | -15.03 | 29.00 | 34.17 | 8.41 | 32.61 | 325 | 1 | AVERAGE |

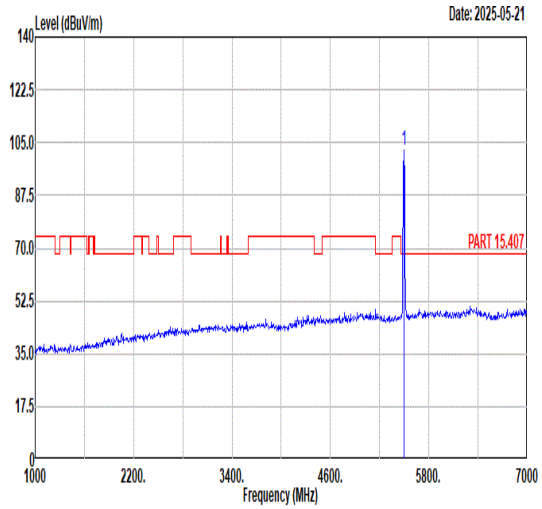


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5500.00 | 94.62 | ------ | ------ | 84.67 | 34.20 | 8.36 | 32.61 | 325 | 1 | AVERAGE |

| Mode | 53 |
|---|---|
| | Band Edge |
| | U-NII-2C_5.47-5.725_802.11be EHT20_CH100_Small RU 106+26/ 53+4_5500MHz |
| ANT | CDD 6+17 |
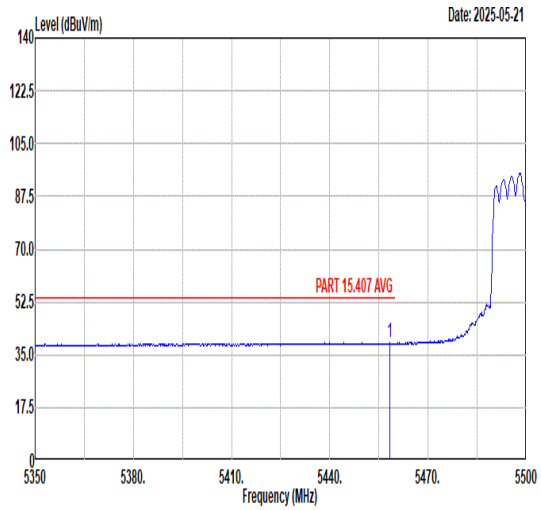
| Pol. | Vertical | Fundamental |
|---|---|---|

**Peak**

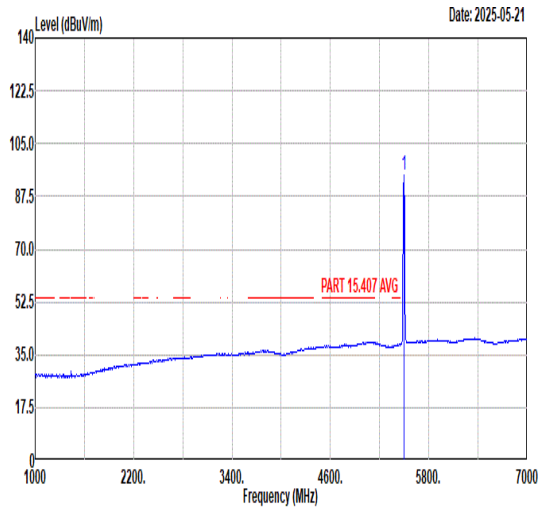


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5419.90 | 48.60 | 74.00 | -25.40 | 38.62 | 34.15 | 8.46 | 32.63 | 251 | 234 | PEAK |
| 2 | 5462.35 | 47.86 | 68.30 | -20.44 | 37.89 | 34.17 | 8.41 | 32.61 | 251 | 234 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5500.00 | 101.93 | ------ | ------ | 91.98 | 34.20 | 8.36 | 32.61 | 251 | 234 | PEAK |

**Avg**

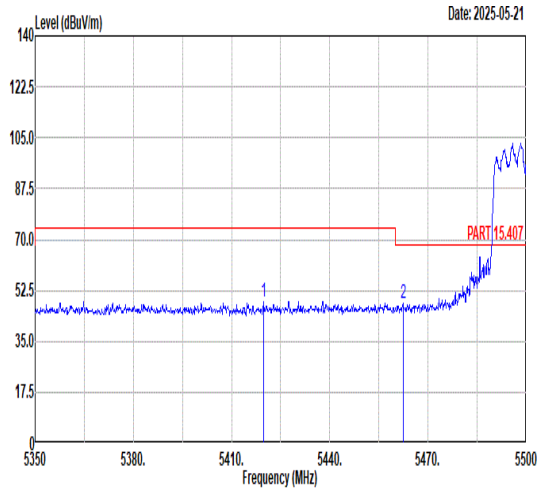


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5459.05 | 38.99 | 54.00 | -15.01 | 29.02 | 34.17 | 8.41 | 32.61 | 251 | 234 | AVERAGE |

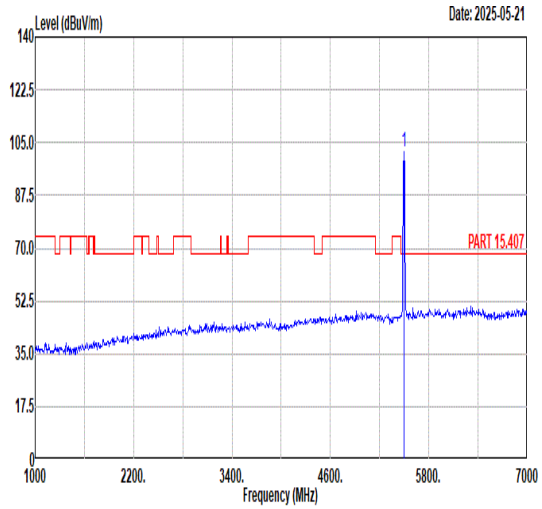


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5500.00 | 94.69 | ------ | ------ | 84.74 | 34.20 | 8.36 | 32.61 | 251 | 234 | AVERAGE |

| Mode | 54 | |
|---|---|---|
| | Band Edge | |
| | U-NII-2C_5.47-5.725_802.11be EHT20_CH140_Small RU 106+26/54+4_5700MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 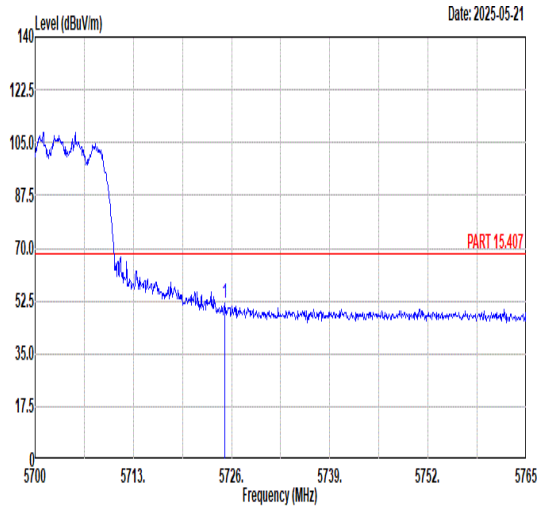 | 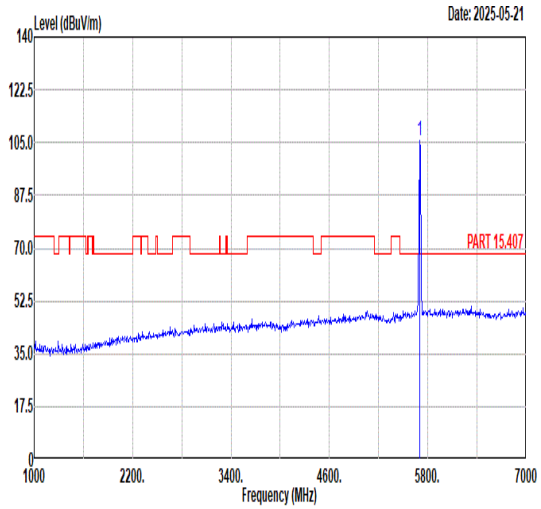 |
| Avg | Blank | 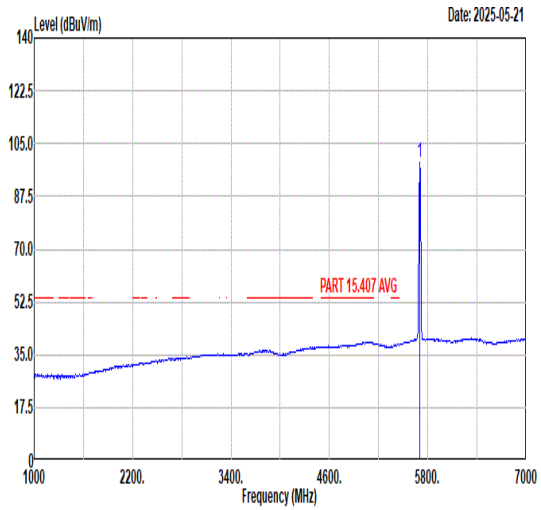 |

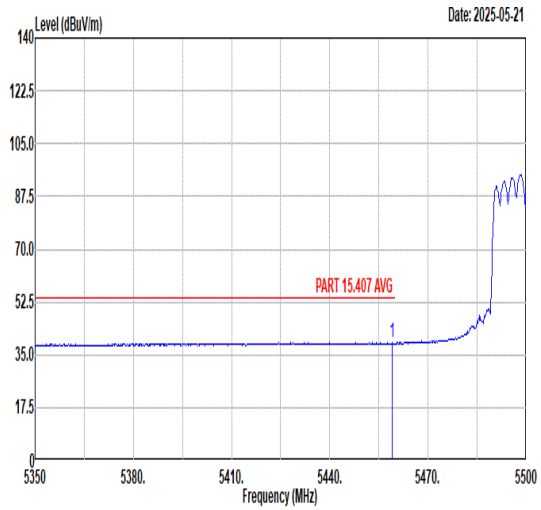

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5725.09 | 52.00 | 68.30 | -16.30 | 41.51 | 34.60 | 8.67 | 32.78 | 165 | 134 | PEAK |
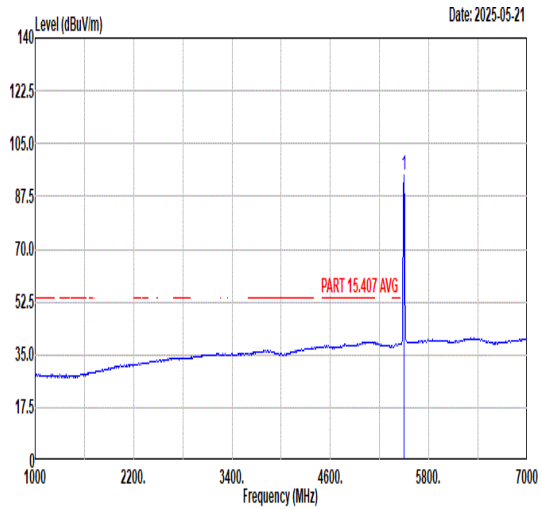
| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5700.00 | 105.83 | ------ | ------ | 95.43 | 34.56 | 8.60 | 32.76 | 165 | 134 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5700.00 | 98.74 | ------ | ------ | 88.38 | 34.55 | 8.57 | 32.76 | 165 | 134 | AVERAGE |

| Mode | 54 | |
|---|---|---|
| | Band Edge | |
| | U-NII-2C_5.47-5.725_802.11be EHT20_CH140_Small RU 106+26/54+4_5700MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 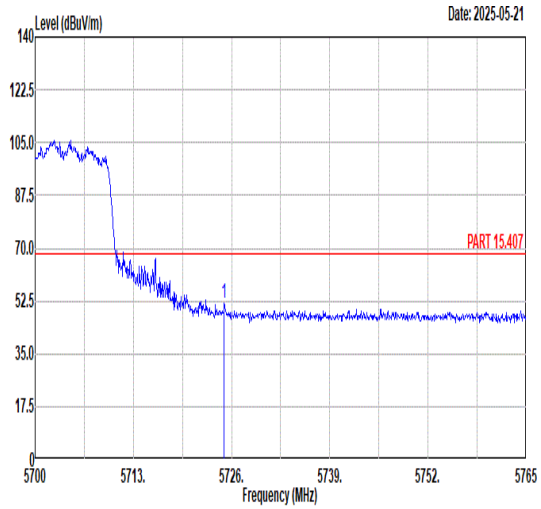 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5725.03 51.53 68.30 -16.77 41.04 34.60 8.67 32.78 229 53 PEAK | 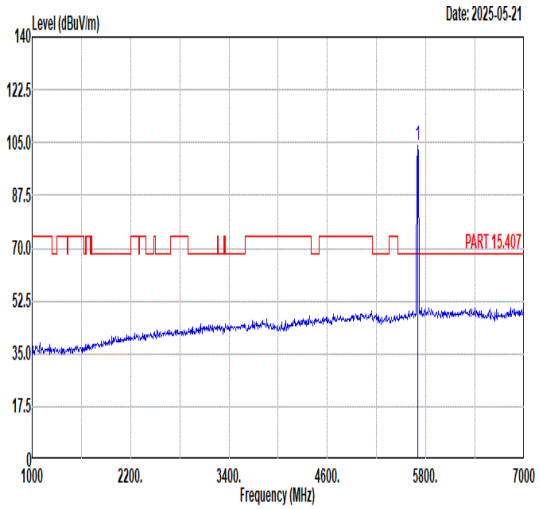 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5700.00 104.11 ------ ------ 93.71 34.56 8.60 32.76 229 53 PEAK |
| Avg | Blank | 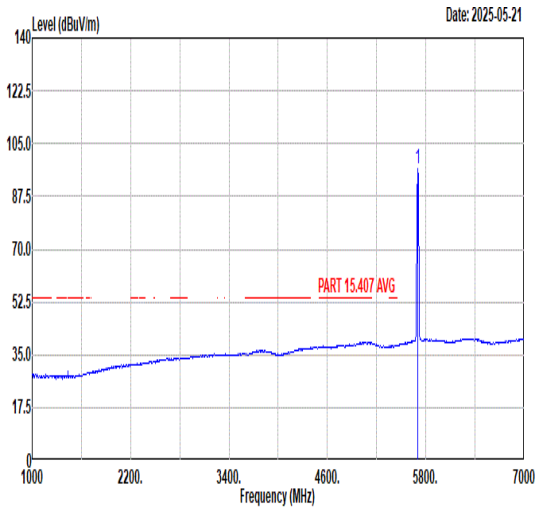 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5700.00 96.63 ------ ------ 86.23 34.56 8.60 32.76 229 53 AVERAGE |

| Mode | 55 | |
|---|---|---|
| | Band Edge | |
| | U-NII-3_5.725-5.85_802.11be EHT20_CH149_Small RU 52+26/37+2_5745MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 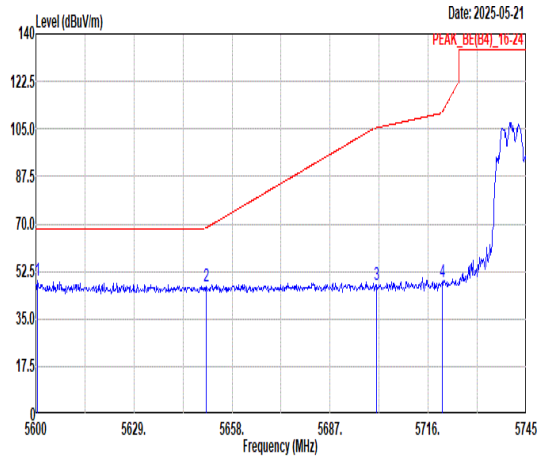 | 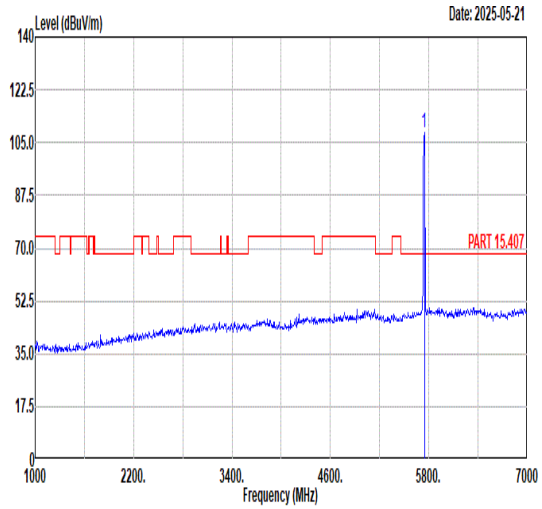 |
| Avg | Blank | 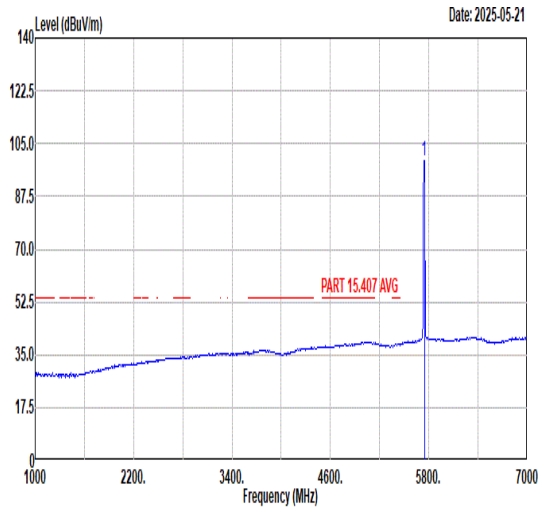 |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5600.58 | 49.02 | 68.30 | -19.28 | 39.11 | 34.37 | 8.22 | 32.68 | 154 | 135 | PEAK |
| 2 | 5650.46 | 46.81 | 68.64 | -21.83 | 36.66 | 34.47 | 8.40 | 32.72 | 154 | 135 | PEAK |
| 3 | 5700.78 | 47.81 | 105.42 | -57.61 | 37.43 | 34.56 | 8.58 | 32.76 | 154 | 135 | PEAK |
| 4 | 5720.21 | 48.69 | 111.27 | -62.58 | 38.22 | 34.59 | 8.66 | 32.78 | 154 | 135 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5745.00 | 108.48 | ------ | ------ | 97.89 | 34.64 | 8.75 | 32.80 | 154 | 135 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5745.00 | 99.26 | ------ | ------ | 88.69 | 34.63 | 8.73 | 32.79 | 154 | 135 | AVERAGE |

| Mode | 55 | |
|---|---|---|
| | Band Edge | |
| | U-NII-3_5.725-5.85_802.11be EHT20_CH149_Small RU 52+26/37+2_5745MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 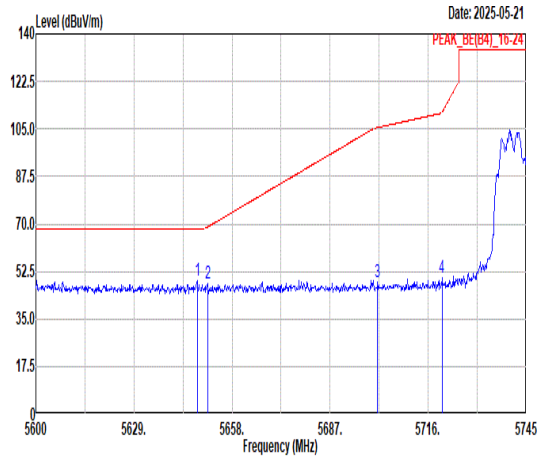 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5647.71 49.12 68.30 -19.18 38.99 34.46 8.39 32.72 155 243 PEAK<br>2 5650.75 47.98 68.86 -20.88 37.83 34.47 8.40 32.72 155 243 PEAK<br>3 5701.07 48.44 105.50 -57.06 38.05 34.56 8.59 32.76 155 243 PEAK<br>4 5720.06 50.09 110.94 -60.85 39.62 34.59 8.66 32.78 155 243 PEAK | 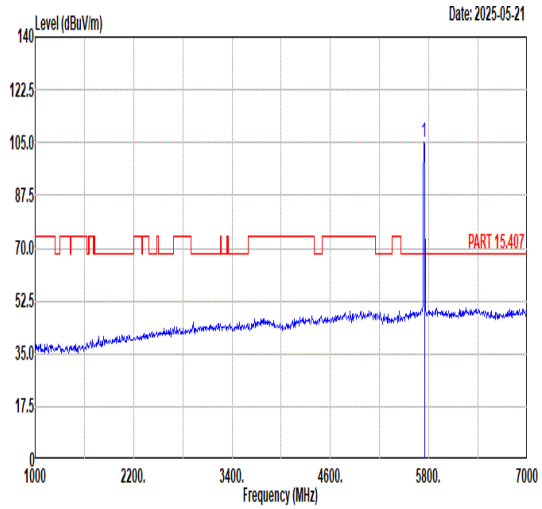 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5745.00 105.04 ------ ------ 94.47 34.63 8.73 32.79 155 243 PEAK |
| Avg | Blank | 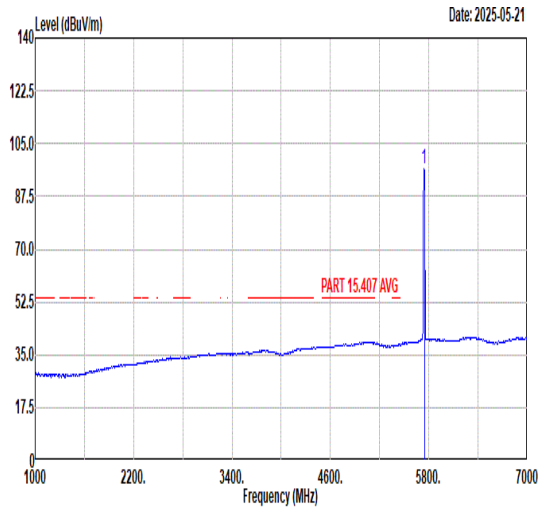 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5745.00 96.57 ------ ------ 86.00 34.63 8.73 32.79 155 243 AVERAGE |

| Mode | 56 | |
|---|---|---|
| | Band Edge | |
| | U-NII-3_5.725-5.85_802.11be EHT20_CH165_Small RU 52+26/40+6_5825MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 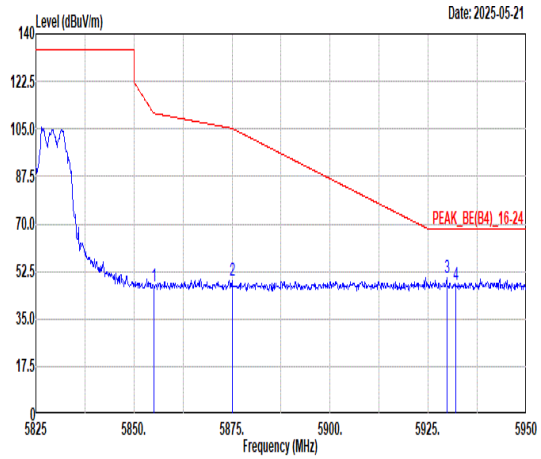 | 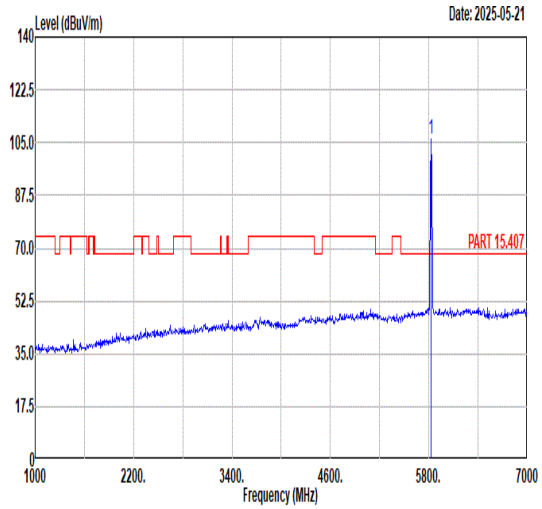 |
| Avg | Blank | 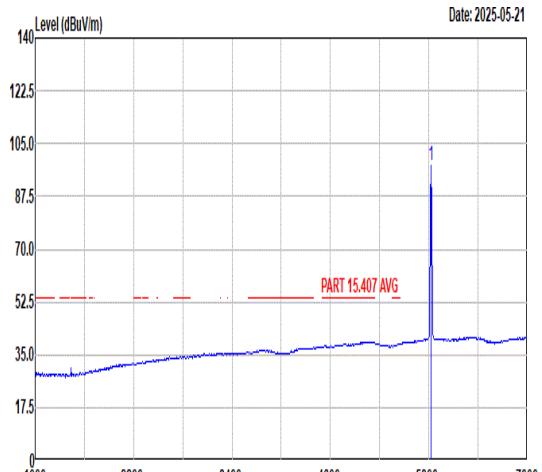 |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5855.00 | 47.25 | 110.80 | -63.55 | 36.42 | 34.84 | 8.87 | 32.88 | 100 | 360 | PEAK |
| 2 | 5875.00 | 49.00 | 105.20 | -56.20 | 38.16 | 34.88 | 8.85 | 32.89 | 100 | 360 | PEAK |
| 3 | 5929.75 | 50.05 | 68.30 | -18.25 | 39.23 | 34.98 | 8.78 | 32.94 | 100 | 360 | PEAK |
| 4 | 5932.13 | 47.31 | 68.30 | -20.99 | 36.49 | 34.98 | 8.78 | 32.94 | 100 | 360 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5825.00 | 106.08 | ------ | ------ | 95.25 | 34.79 | 8.90 | 32.86 | 100 | 360 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5825.00 | 97.48 | ------ | ------ | 86.65 | 34.79 | 8.90 | 32.86 | 100 | 360 | AVERAGE |

| Mode | 56 | |
|---|---|---|
| | Band Edge | |
| | U-NII-3_5.725-5.85_802.11be EHT20_CH165_Small RU 52+26/40+6_5825MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 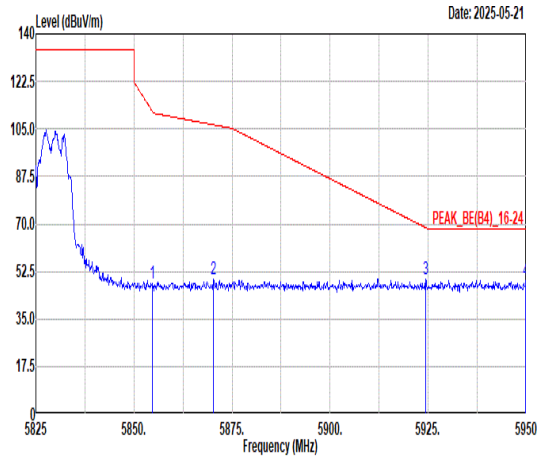 | 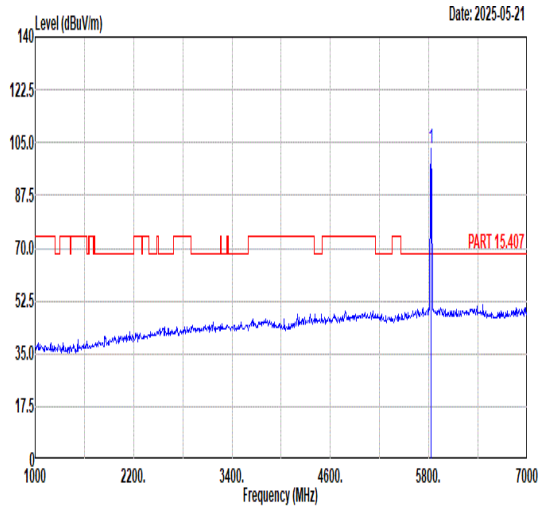 |
| Avg | Blank | 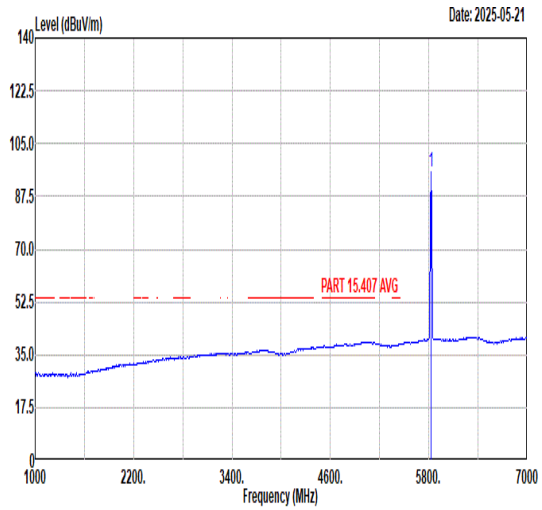 |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5854.63 | 48.00 | 111.65 | -63.65 | 37.17 | 34.84 | 8.87 | 32.88 | 155 | 241 | PEAK |
| 2 | 5870.25 | 49.82 | 106.53 | -56.71 | 38.99 | 34.87 | 8.85 | 32.89 | 155 | 241 | PEAK |
| 3 | 5924.38 | 49.66 | 68.66 | -19.00 | 38.83 | 34.97 | 8.79 | 32.93 | 155 | 241 | PEAK |
| 4 | 5949.88 | 49.22 | 68.30 | -19.08 | 38.40 | 35.01 | 8.76 | 32.95 | 155 | 241 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5825.00 | 103.18 | ------ | ------ | 92.35 | 34.79 | 8.90 | 32.86 | 155 | 241 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5825.00 | 95.86 | ------ | ------ | 85.03 | 34.79 | 8.90 | 32.86 | 155 | 241 | AVERAGE |

| Mode | 57 |
|---|---|
| | Band Edge - L |
| | U-NII-1_5.15-5.25_802.11be EHT80_CH42_Puncturing 20M ④_5210MHz |
| ANT | CDD 6+17 |

| Pol. | Horizontal | Fundamental |
|---|---|---|

**Peak**




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5140.28 | 51.68 | 74.00 | -22.32 | 42.52 | 33.99 | 7.91 | 32.74 | 130 | 177 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5210.00 | 98.83 | ------ | ------ | 89.60 | 34.01 | 7.94 | 32.72 | 130 | 177 | PEAK |

**Avg**

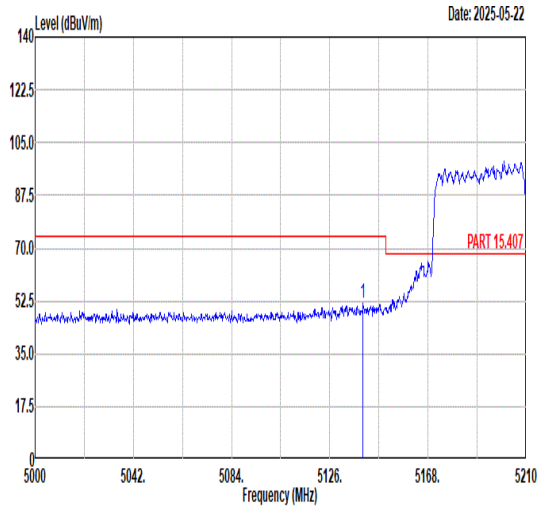


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5135.45 | 45.01 | 54.00 | -8.99 | 35.86 | 33.98 | 7.91 | 32.74 | 130 | 177 | AVERAGE |

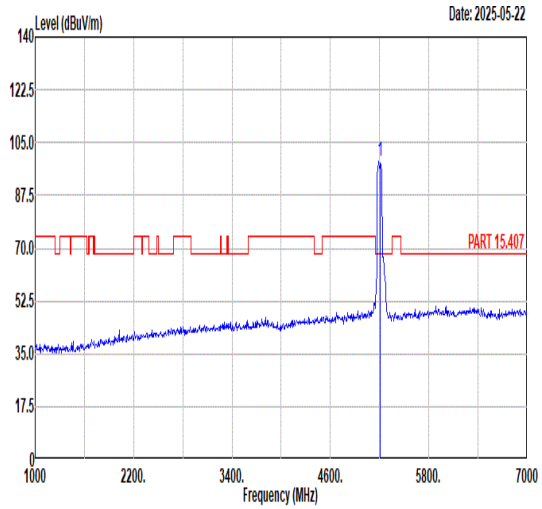


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5210.00 | 91.75 | ------ | ------ | 82.47 | 34.03 | 7.96 | 32.71 | 130 | 177 | AVERAGE |

| Mode | 57 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-1_5.15-5.25_802.11be EHT80_CH42_Puncturing 20M ④_5210MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 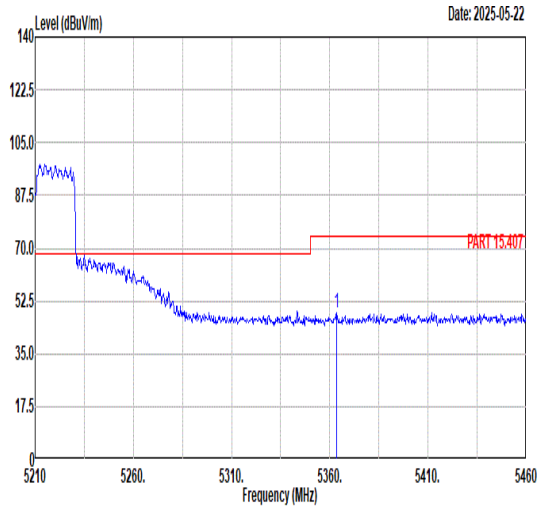 <br>Limit Read Ant Cable Preamp APos TPos<br>Freq Level Line Margin Level Factor Loss Factor Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5363.50 48.52 74.00 -25.48 38.69 34.12 8.36 32.65 130 177 PEAK | Blank |
| Avg | 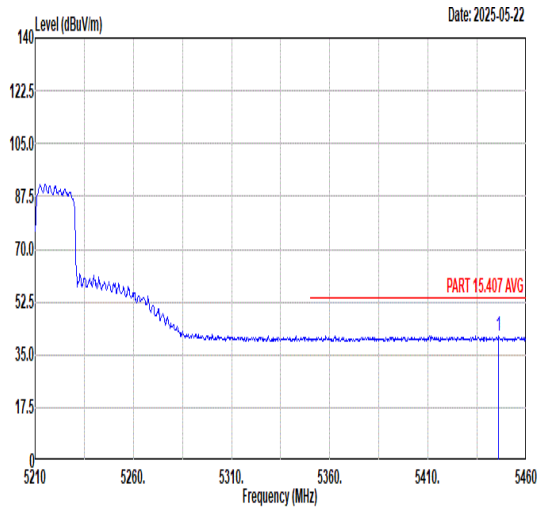 <br>Limit Read Ant Cable Preamp APos TPos<br>Freq Level Line Margin Level Factor Loss Factor Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5446.00 41.05 54.00 -12.95 31.07 34.17 8.43 32.62 130 177 AVERAGE | Blank |
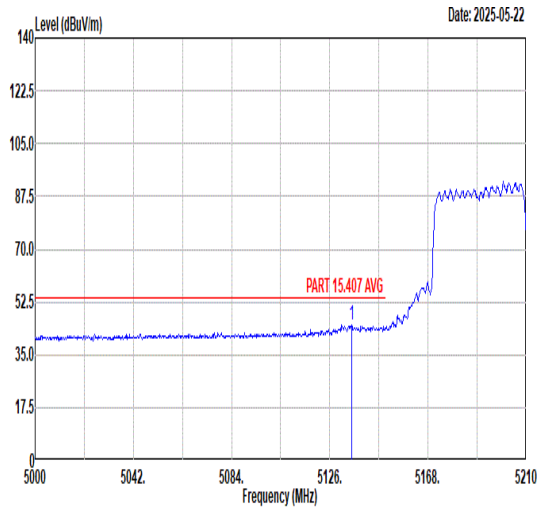
| Mode | 57 |
|---|---|
| | Band Edge - L |
| | U-NII-1_5.15-5.25_802.11be EHT80_CH42_Puncturing 20M ④_5210MHz |
| ANT | CDD 6+17 |

| Pol. | Vertical | Fundamental |
|---|---|---|
| Peak | 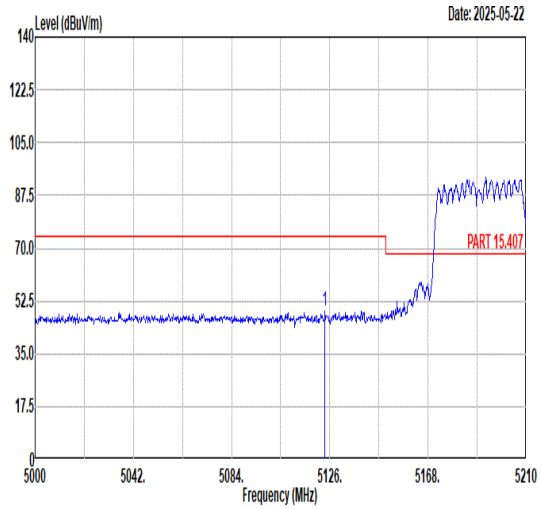 | 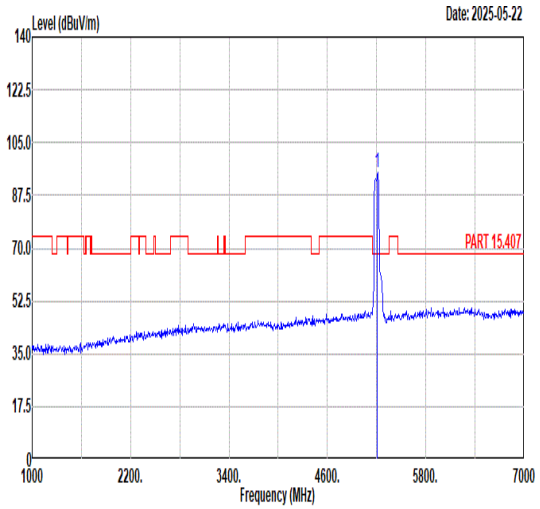 |
| Avg | 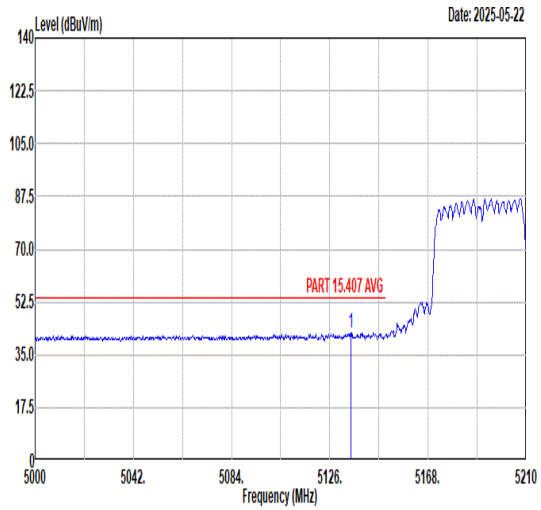 | 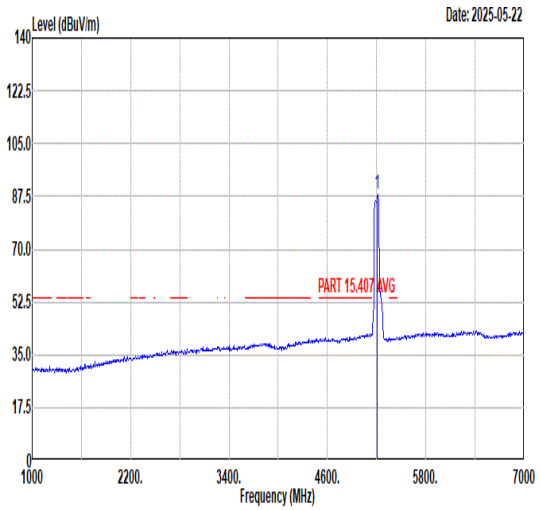 |

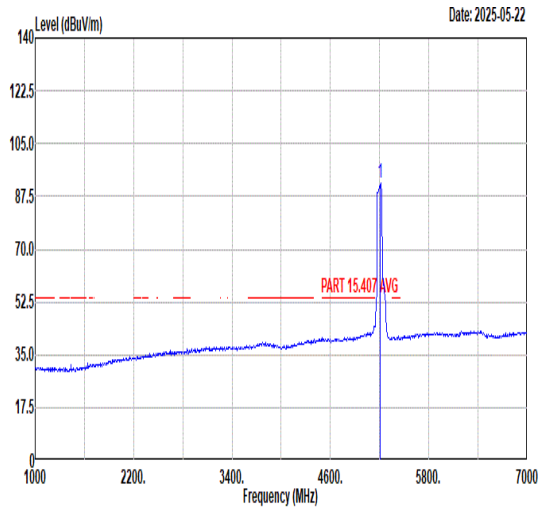

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5123.90 | 49.03 | 74.00 | -24.97 | 39.90 | 33.98 | 7.90 | 32.75 | 100 | 269 | PEAK |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5210.00 | 95.20 | ------ | ------ | 85.92 | 34.03 | 7.96 | 32.71 | 100 | 269 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5135.03 | 42.47 | 54.00 | -11.53 | 33.32 | 33.98 | 7.91 | 32.74 | 100 | 269 | AVERAGE |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5210.00 | 88.02 | ------ | ------ | 78.74 | 34.03 | 7.96 | 32.71 | 100 | 269 | AVERAGE |

| Mode | 57 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-1_5.15-5.25_802.11be EHT80_CH42_Puncturing 20M ❹_5210MHz | |
| ANT | CDD 6+17 | |
| Pol. | Vertical | Fundamental |
| Peak | 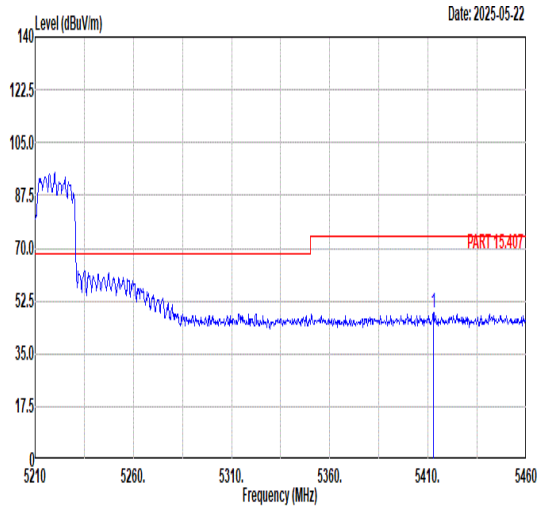 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5412.75 48.36 74.00 -25.64 38.37 34.15 8.47 32.63 100 269 PEAK | Blank |
| Avg | 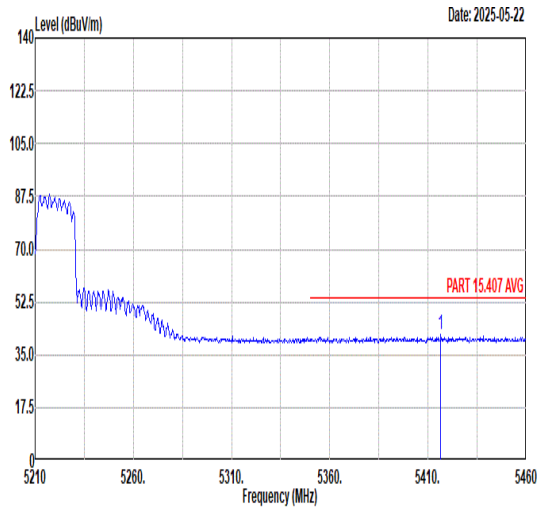 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5416.50 41.53 54.00 -12.47 31.54 34.15 8.47 32.63 100 269 AVERAGE | Blank |

| Mode | 58 | |
|---|---|---|
| | Band Edge - L | |
| | U-NII-2A_5.25-5.35_802.11be EHT80_CH58_Puncturing 20M ❶ 5290MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |

**Peak**




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5118.90 | 49.10 | 74.00 | -24.90 | 39.98 | 33.97 | 7.90 | 32.75 | 170 | 138 | PEAK |




| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5290.00 | 98.93 | ------ | ------ | 89.37 | 34.07 | 8.17 | 32.68 | 170 | 138 | PEAK |

**Avg**

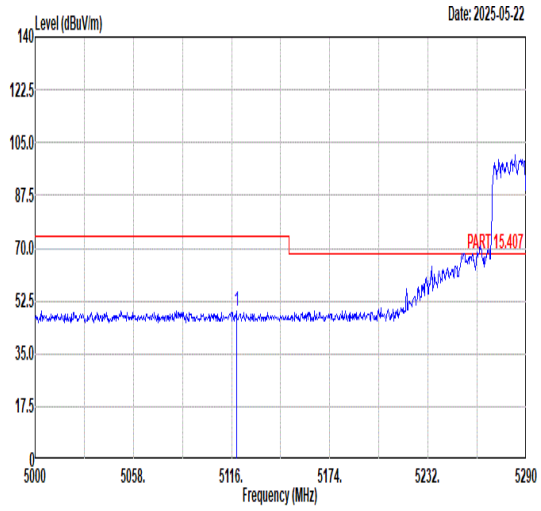


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5118.03 | 42.07 | 54.00 | -11.93 | 32.95 | 33.97 | 7.90 | 32.75 | 170 | 138 | AVERAGE |

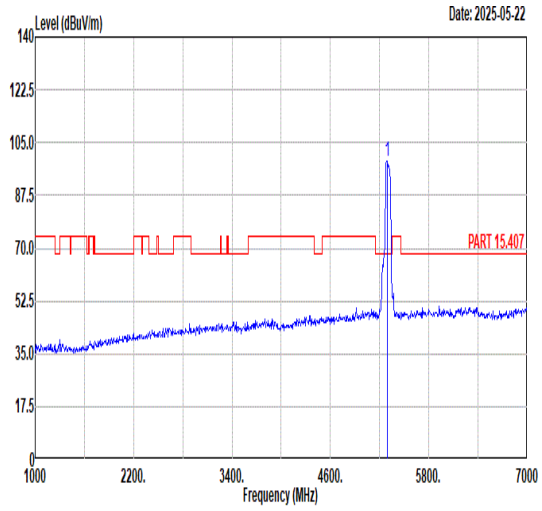


| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5290.00 | 92.49 | ------ | ------ | 82.93 | 34.07 | 8.17 | 32.68 | 170 | 138 | AVERAGE |

| Mode | 58 | |
|---|---|---|
| | Band Edge - R | |
| | U-NII-2A_5.25-5.35_802.11be EHT80_CH58_Puncturing 20M ❶ 5290MHz | |
| ANT | CDD 6+17 | |
| Pol. | Horizontal | Fundamental |
| Peak | 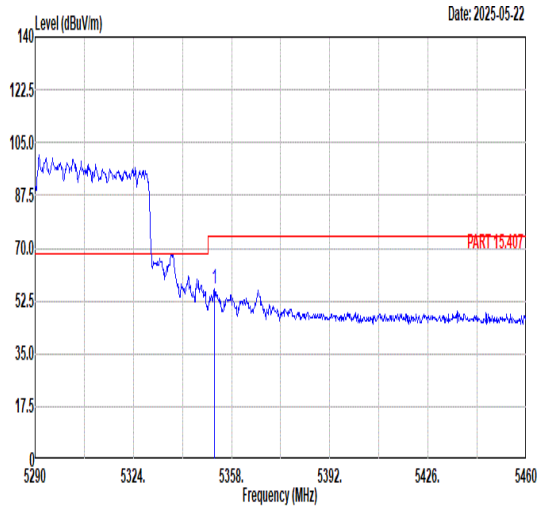 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5352.05 56.41 74.00 -17.59 46.63 34.11 8.33 32.66 170 138 PEAK | Blank |
| Avg | 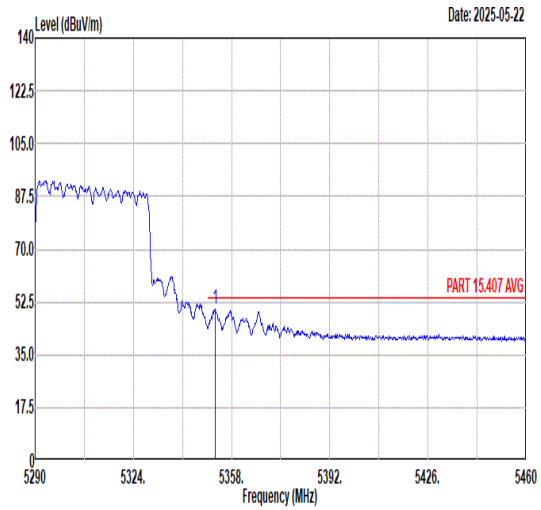 <br>Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark<br>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg<br>1 5352.39 49.97 54.00 -4.03 40.19 34.11 8.33 32.66 170 138 AVERAGE | Blank |
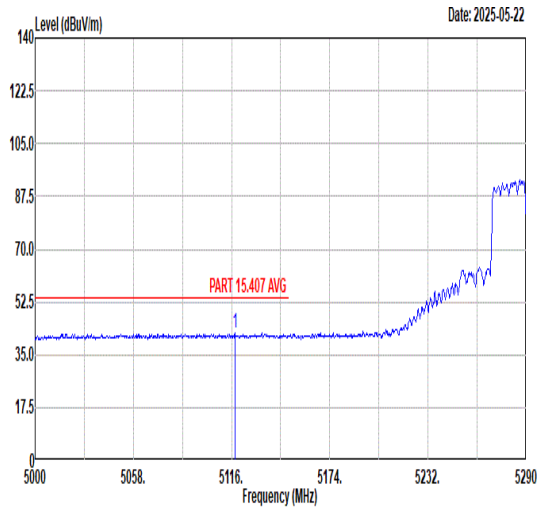
| Mode | 58 |
|---|---|
| | Band Edge - L |
| | U-NII-2A_5.25-5.35_802.11be EHT80_CH58_Puncturing 20M ❶ 5290MHz |
| ANT | CDD 6+17 |

| Pol. | Vertical | Fundamental |
|---|---|---|
| Peak | 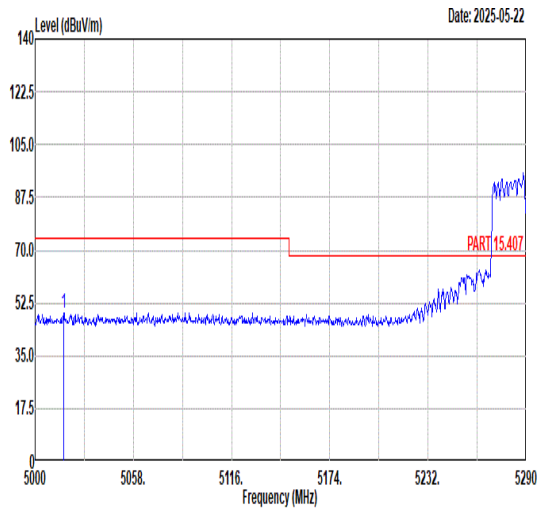 | 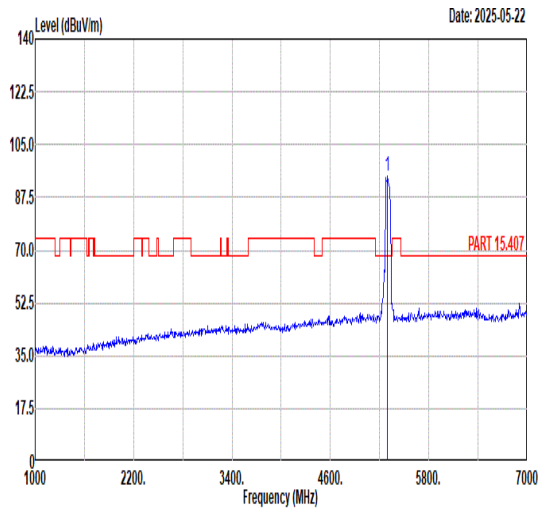 |
| Avg | 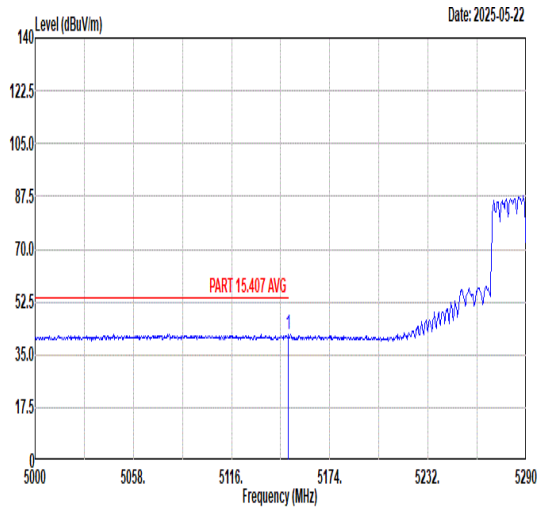 | 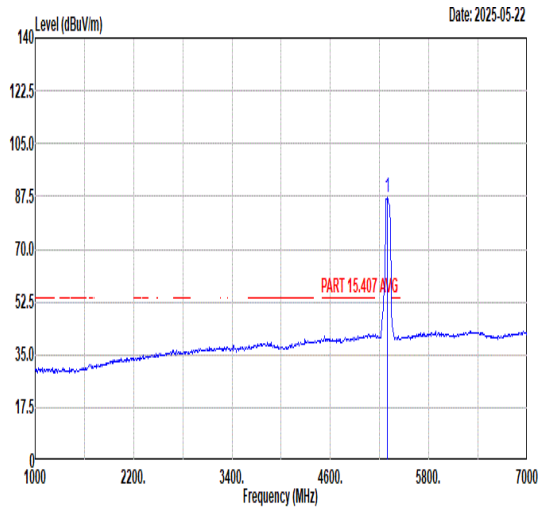 |

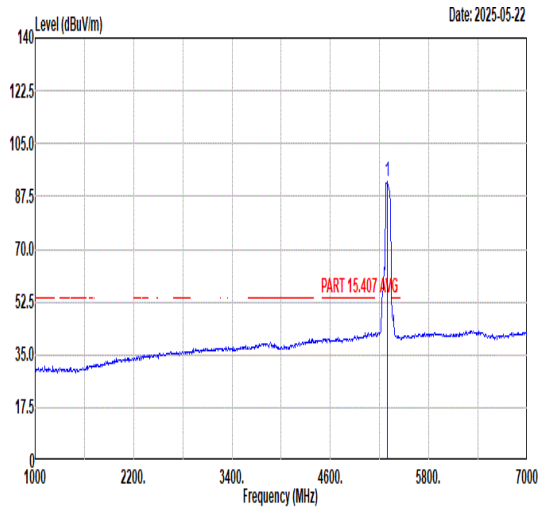

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5016.82 | 49.28 | 74.00 | -24.72 | 40.33 | 33.91 | 7.83 | 32.79 | 255 | 259 | PEAK |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5290.00 | 94.65 | ------ | ------ | 85.07 | 34.08 | 8.18 | 32.68 | 255 | 259 | PEAK |



| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5149.64 | 41.86 | 54.00 | -12.14 | 32.69 | 33.99 | 7.92 | 32.74 | 255 | 259 | AVERAGE |

| | Freq | Level | Limit Line | Margin | Read Level | Ant Factor | Cable Loss | Preamp Factor | APos | TPos | Remark |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | MHz | dBuV/m | dBuV/m | dB | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 5290.00 | 86.97 | ------ | ------ | 77.41 | 34.07 | 8.17 | 32.68 | 255 | 259 | AVERAGE |