




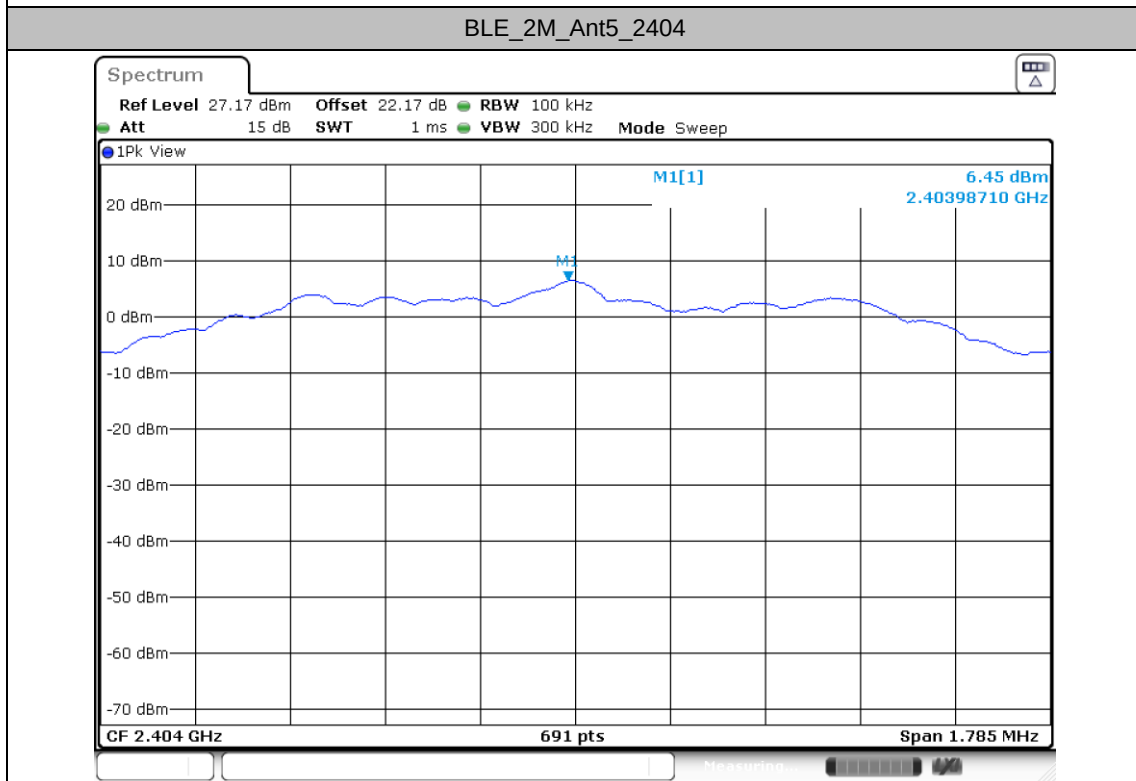
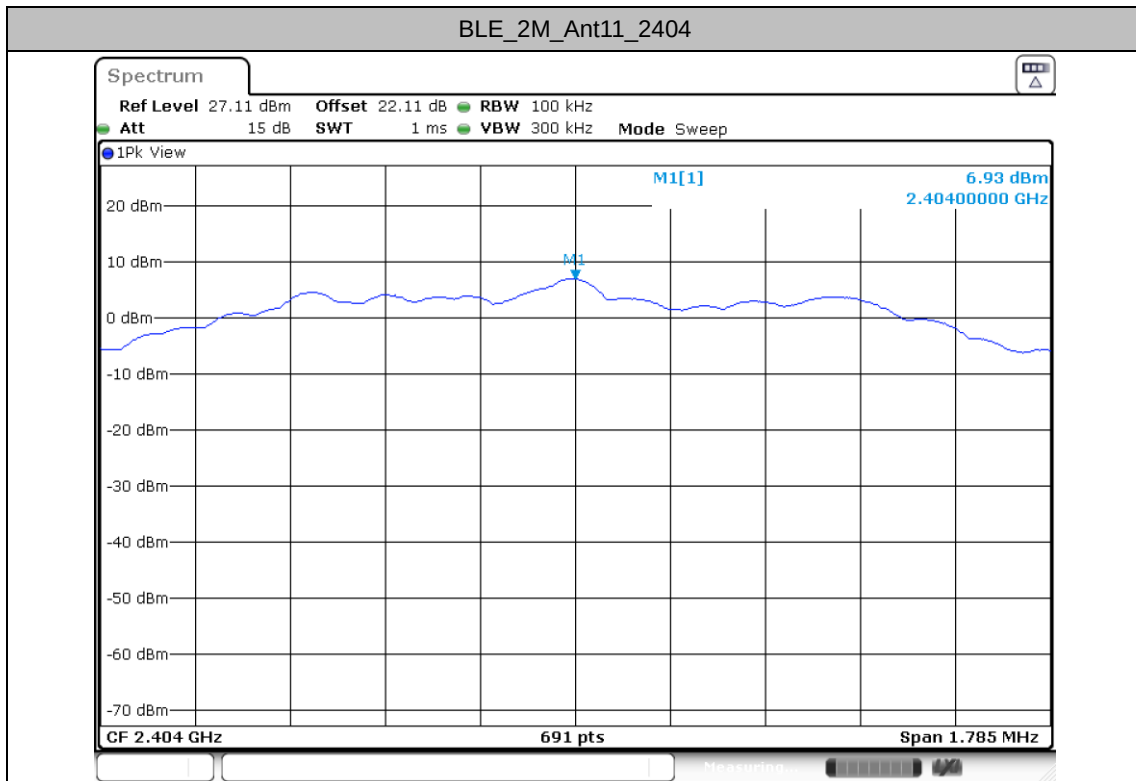
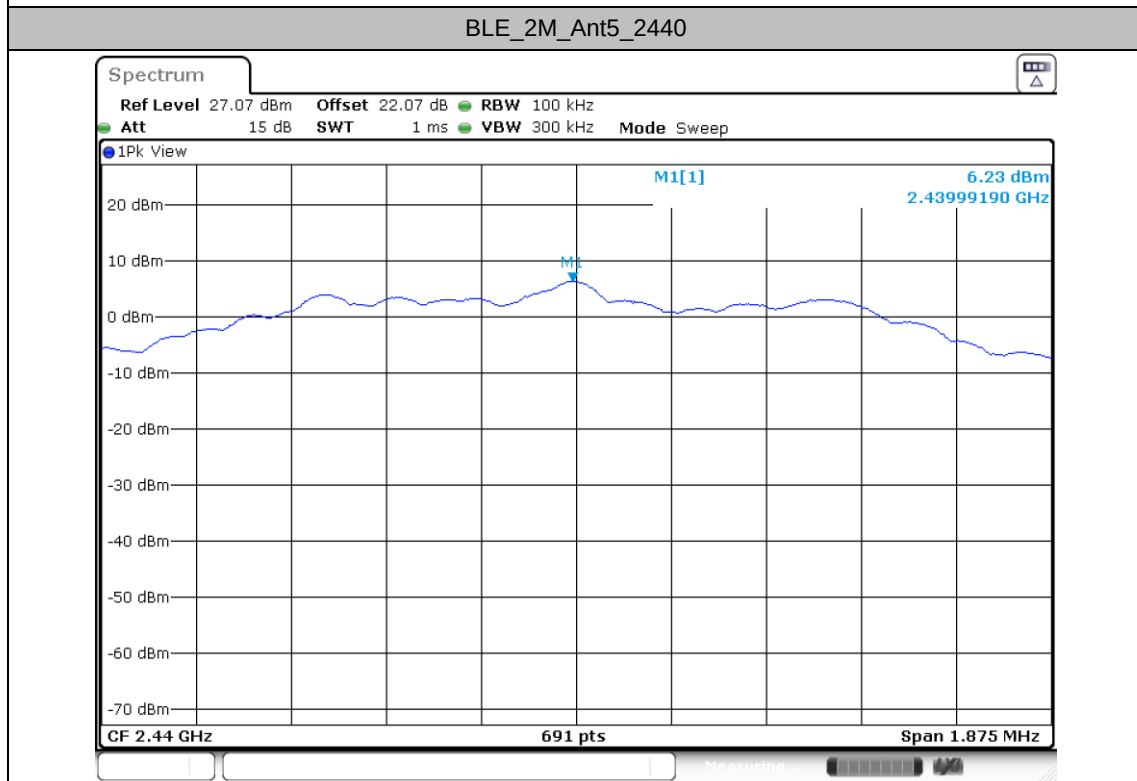
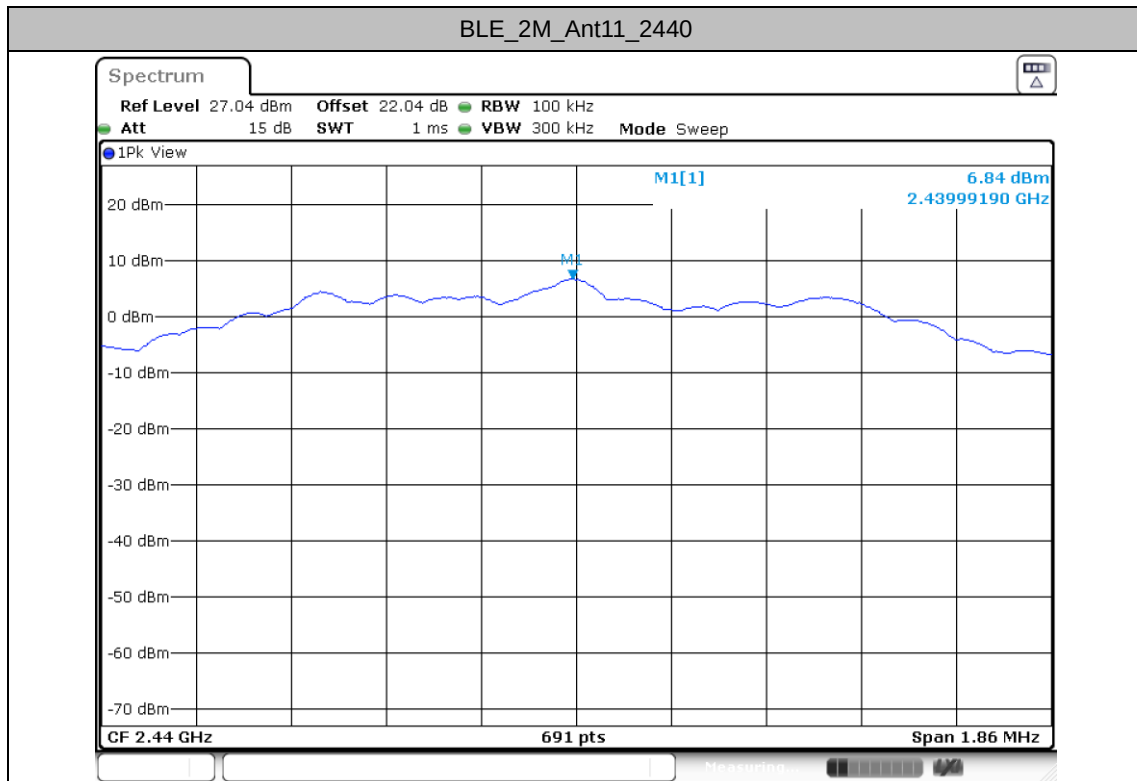


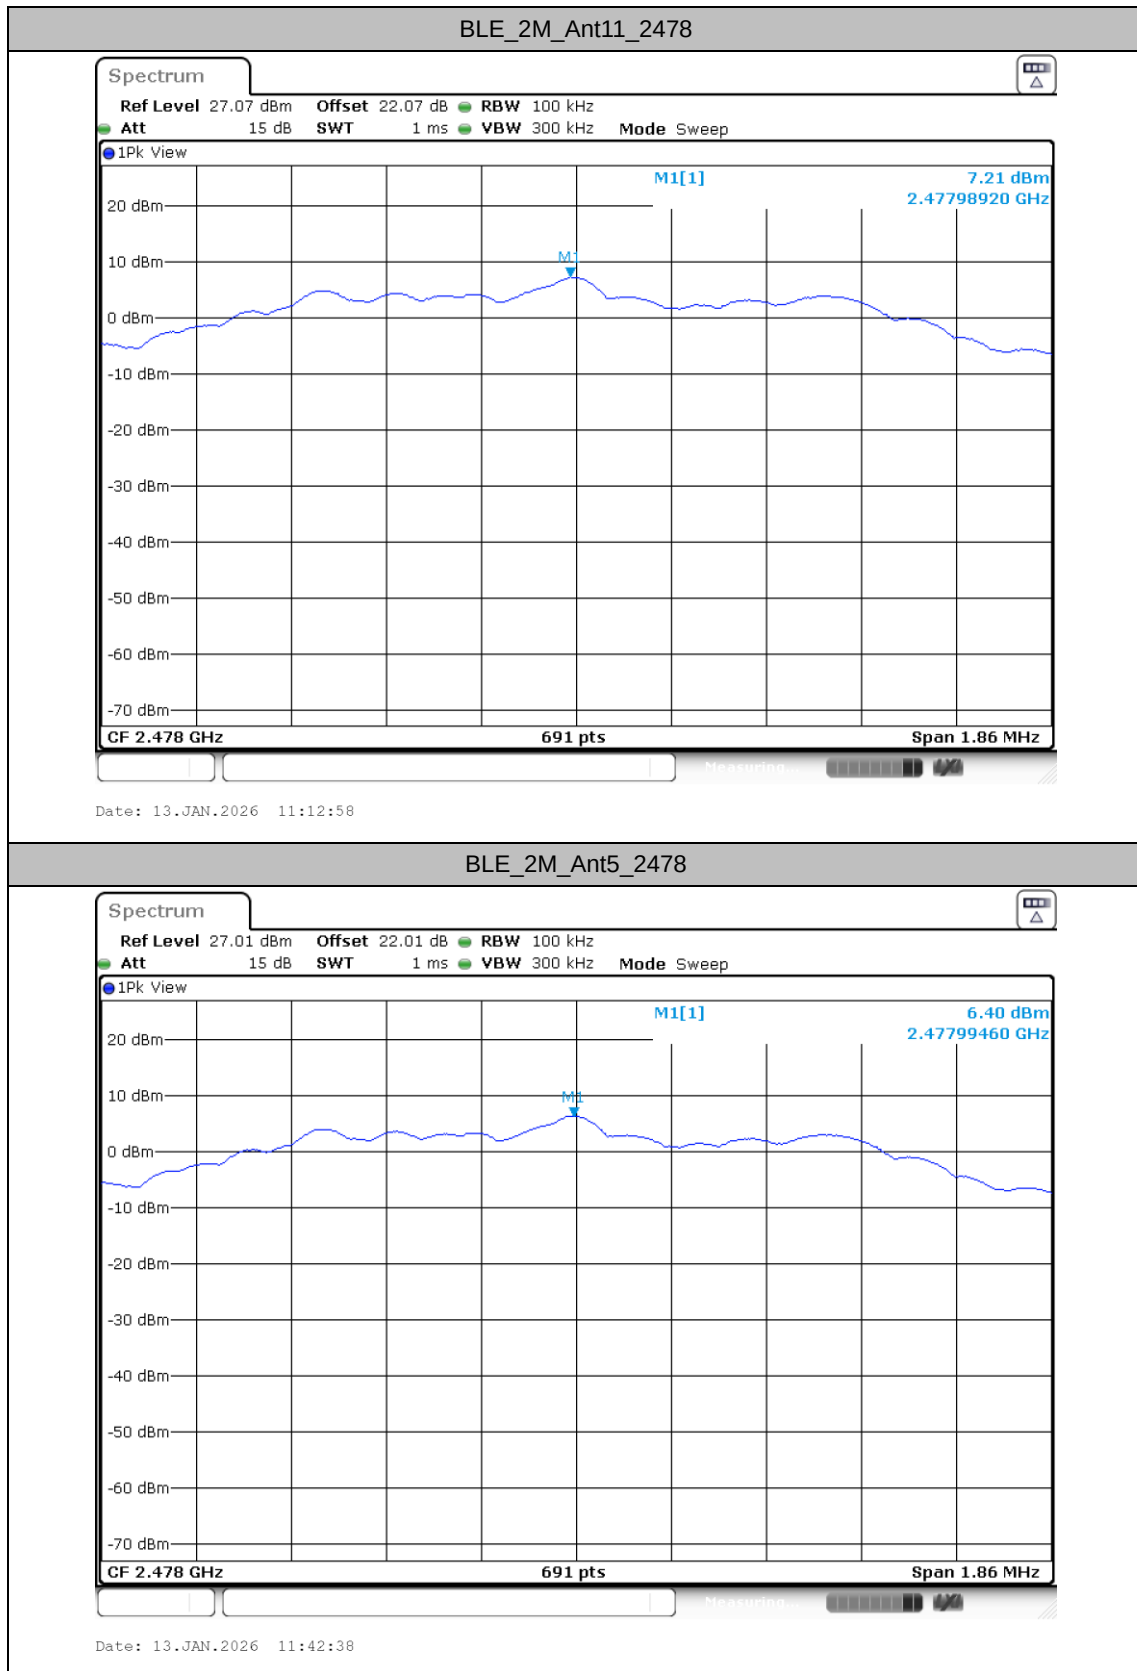



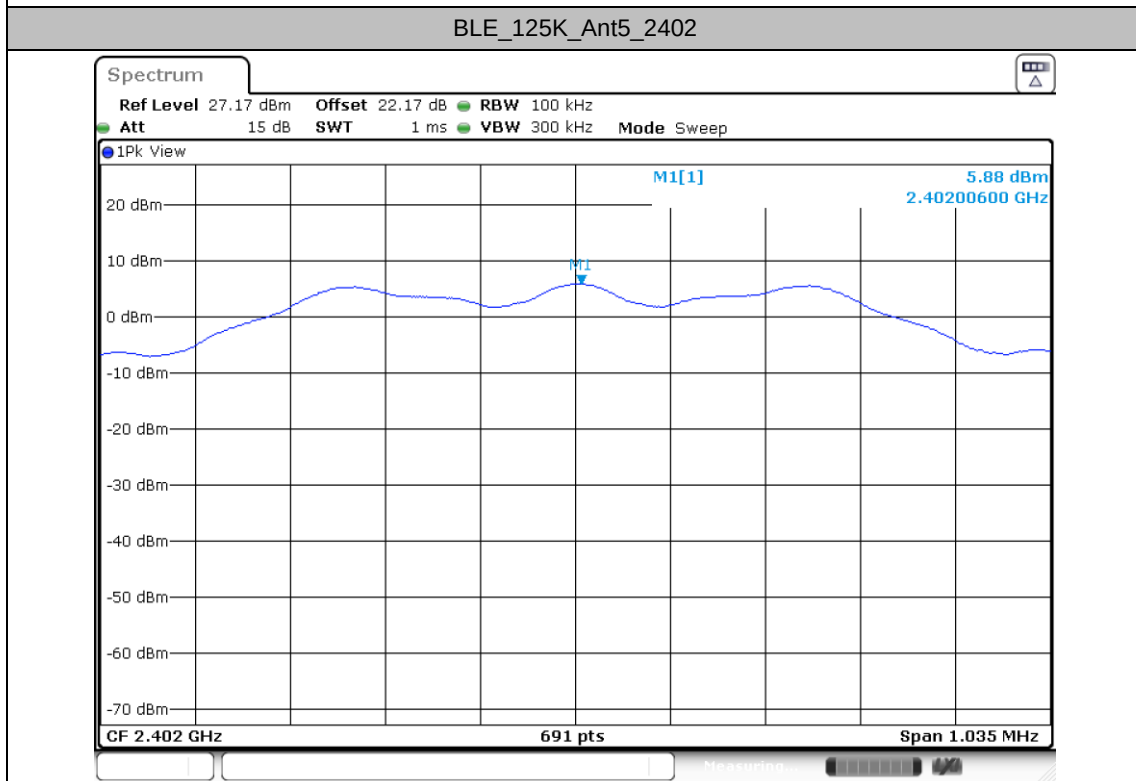



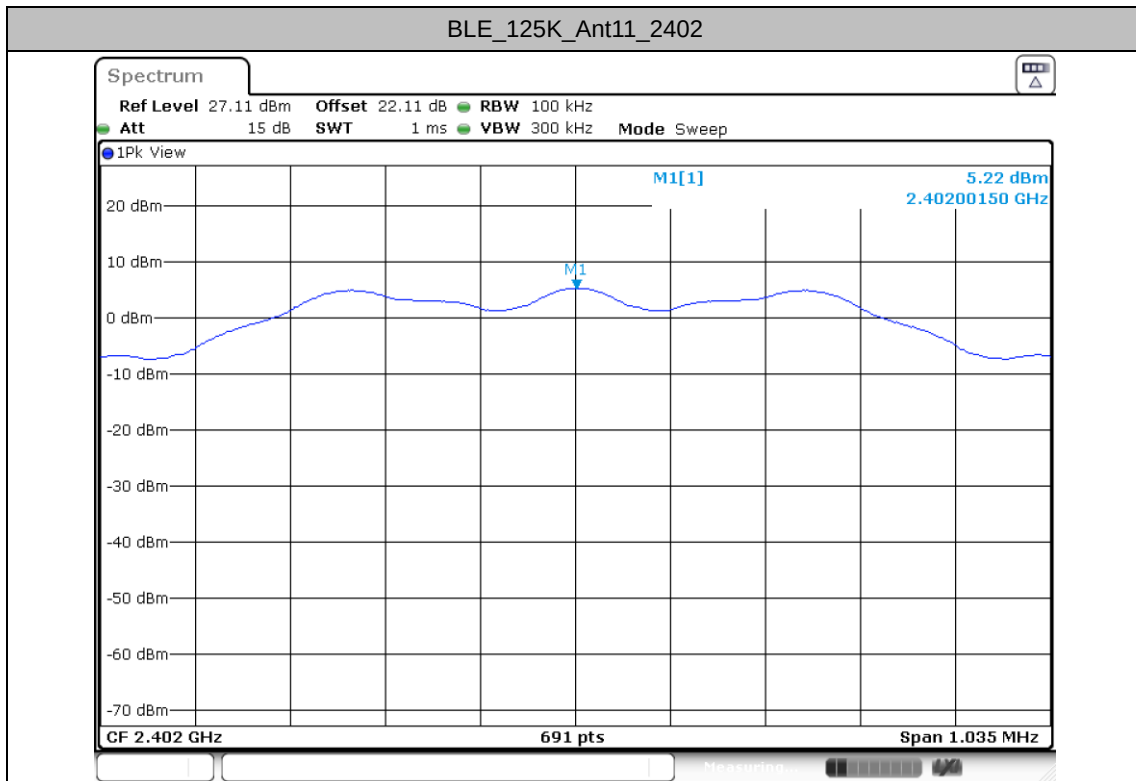



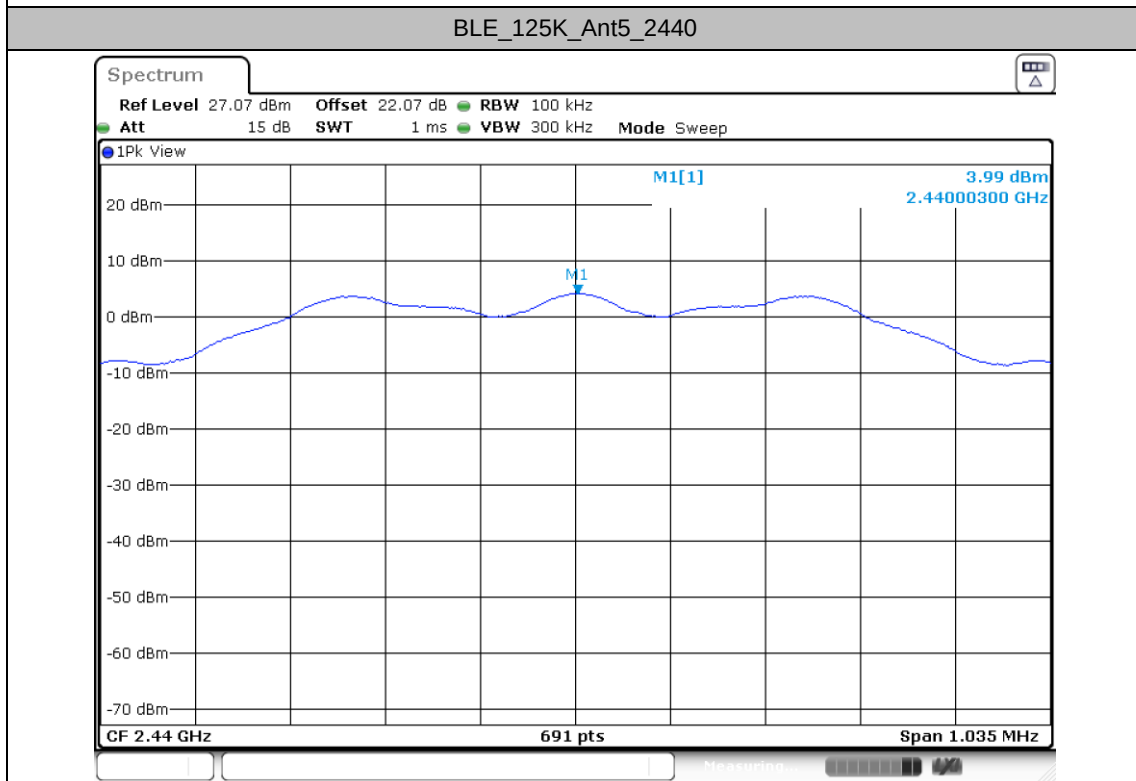


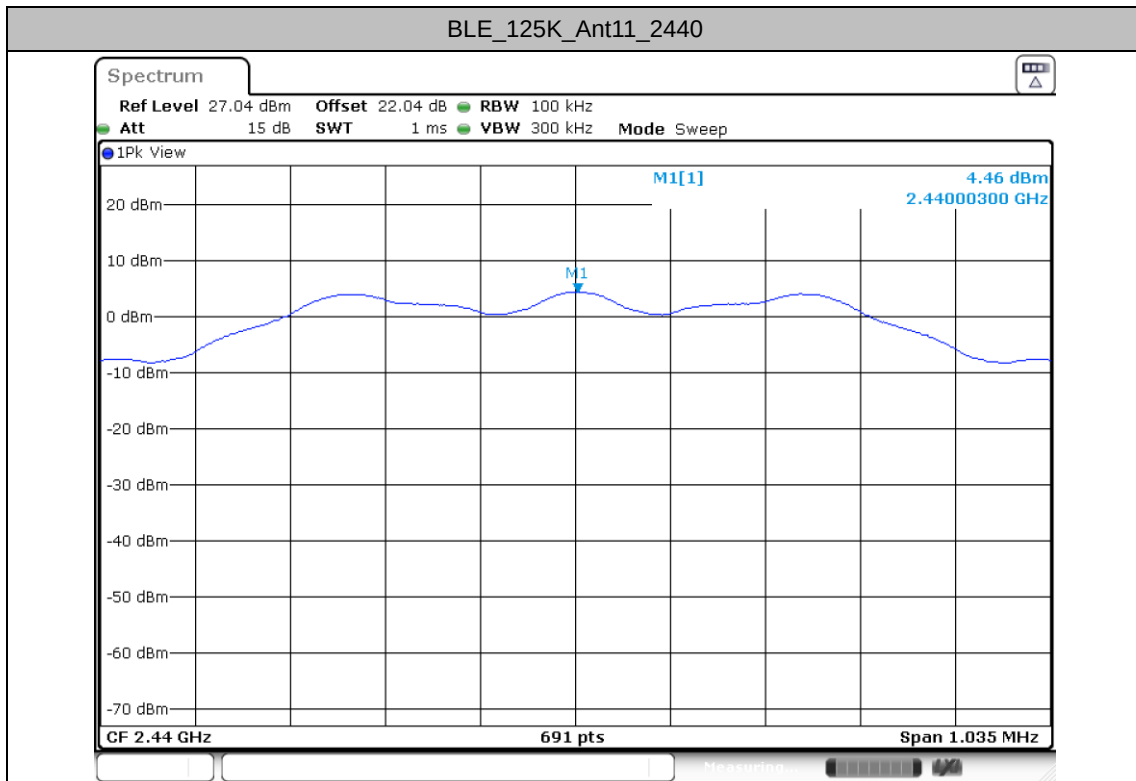

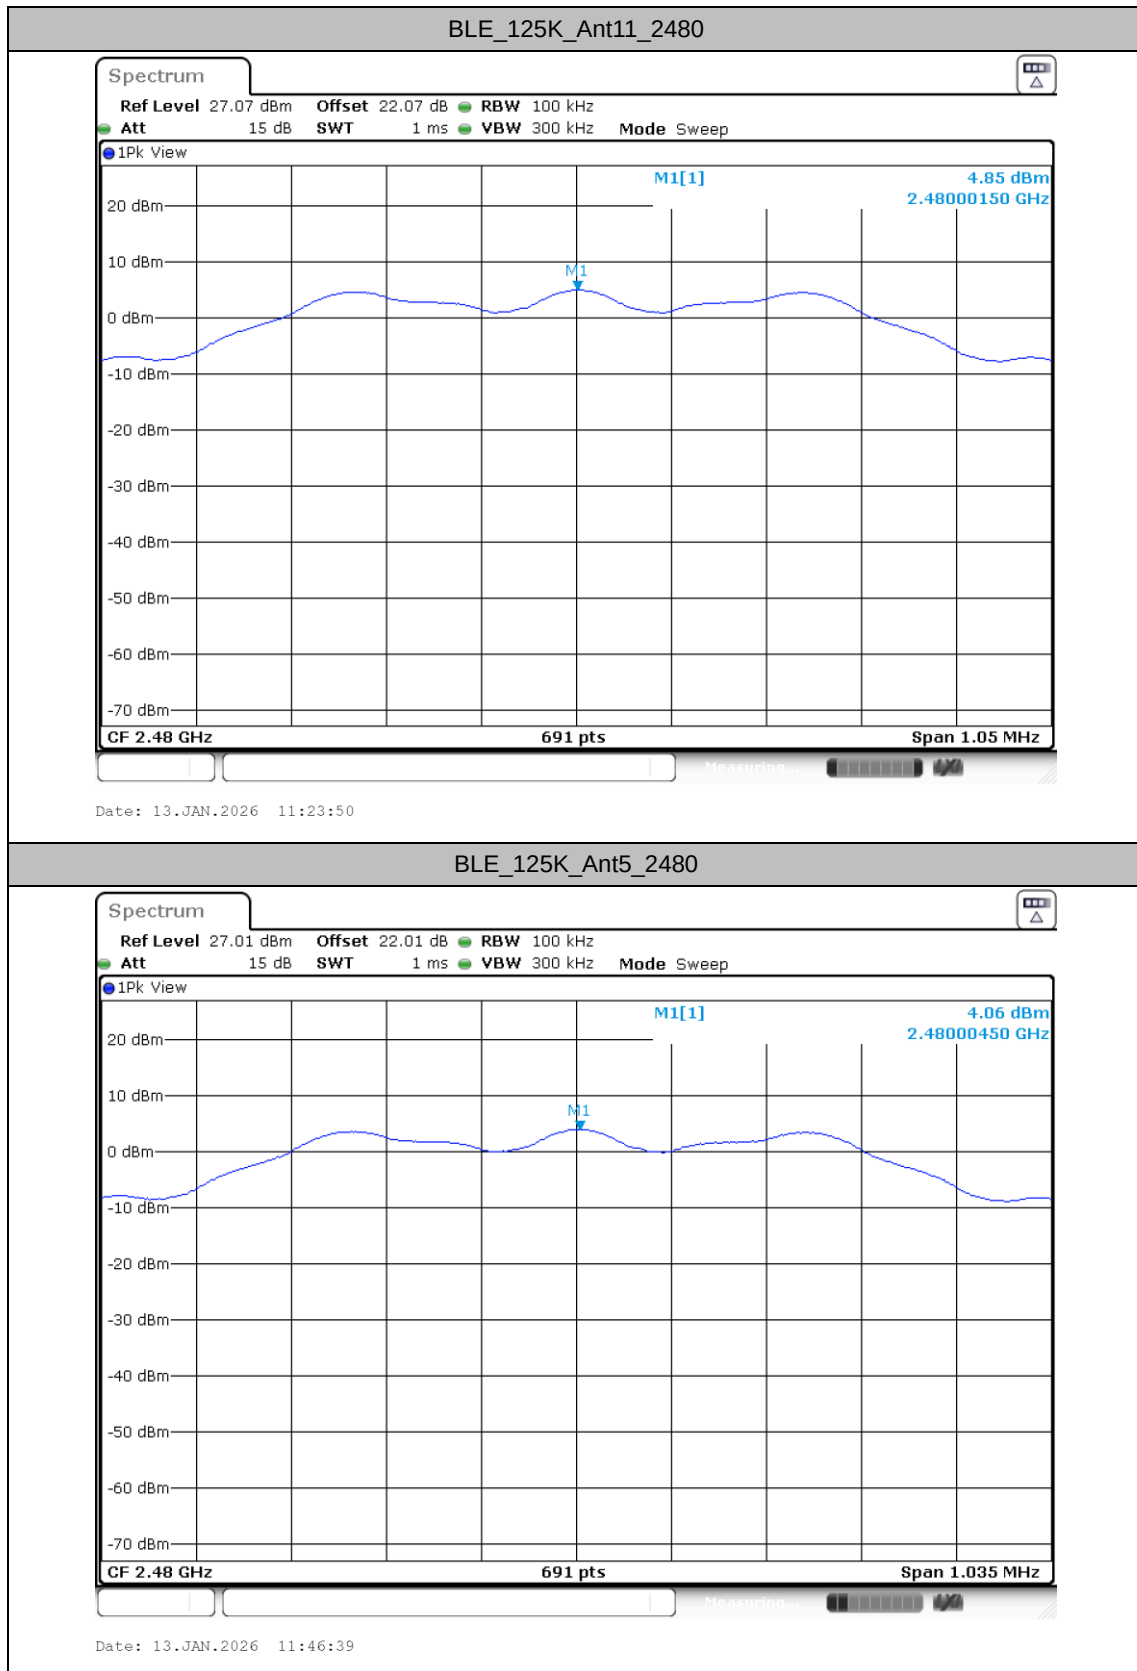

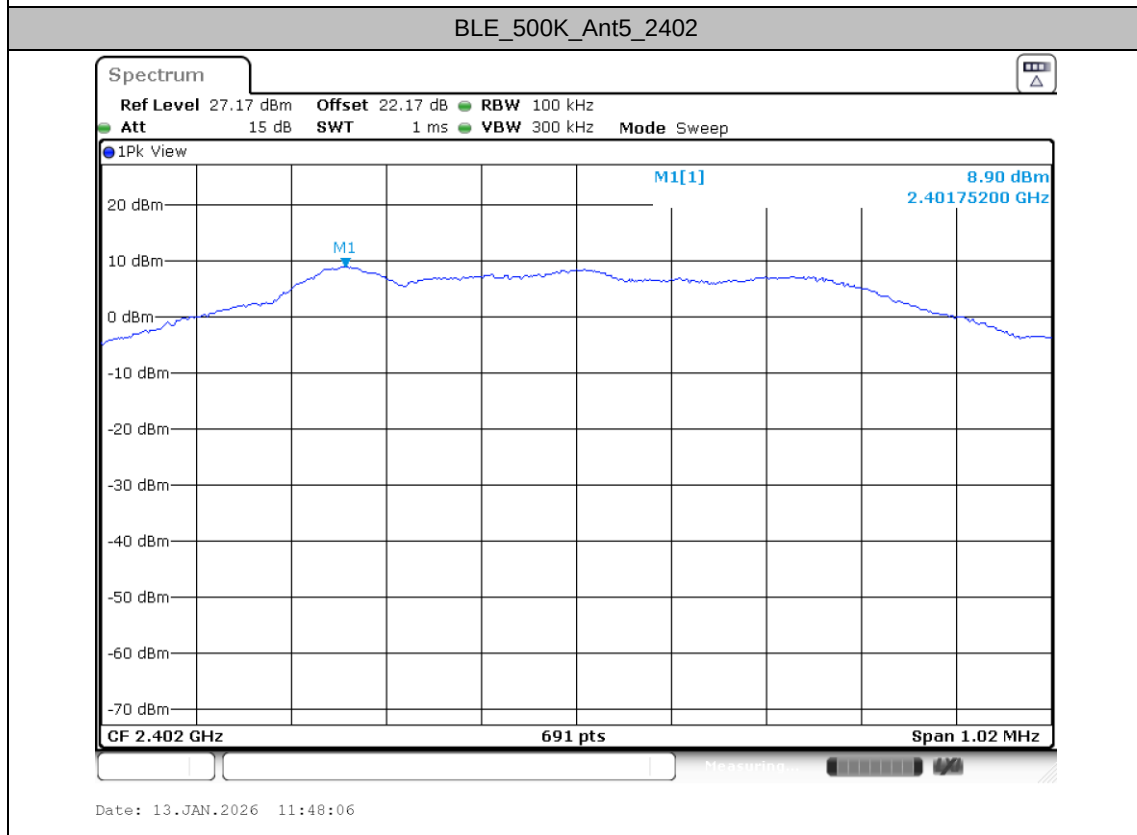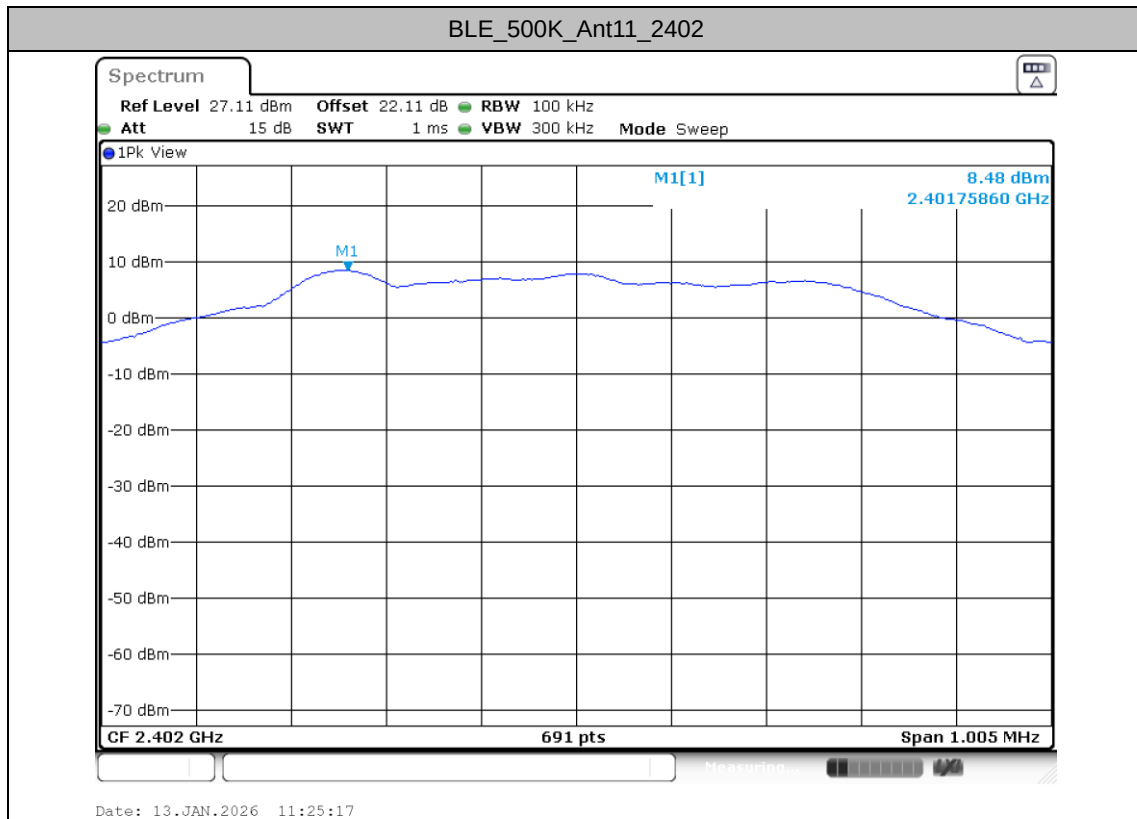

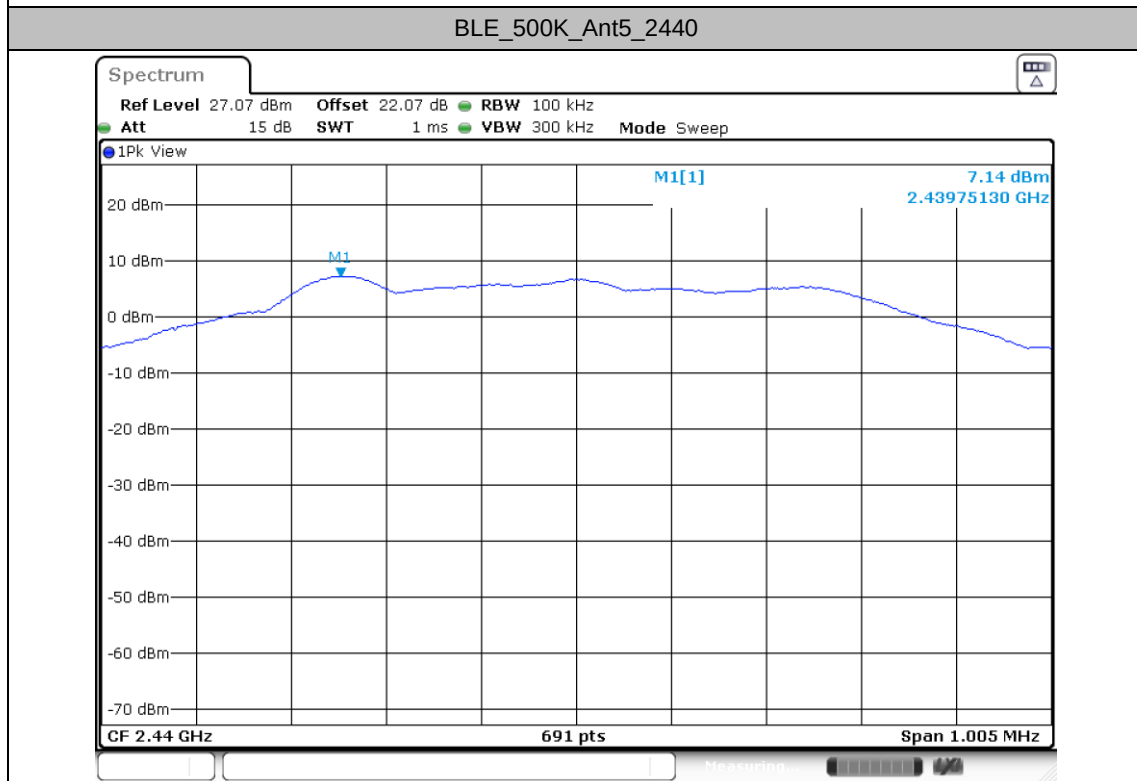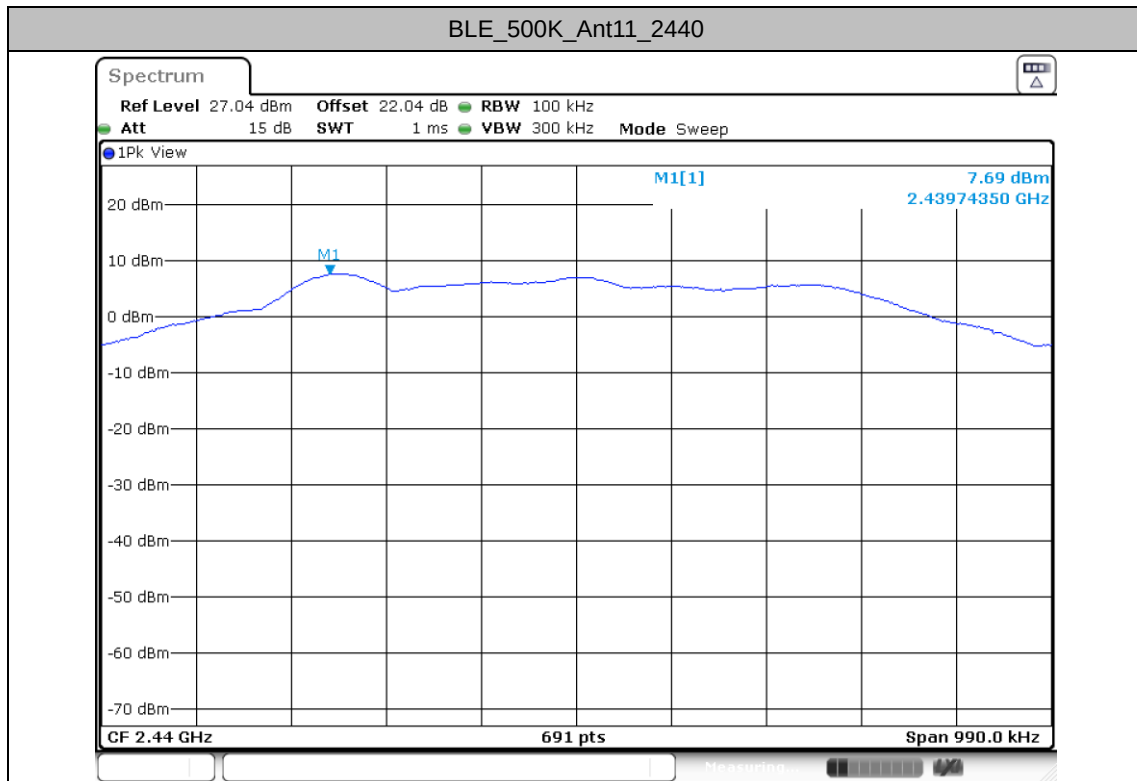

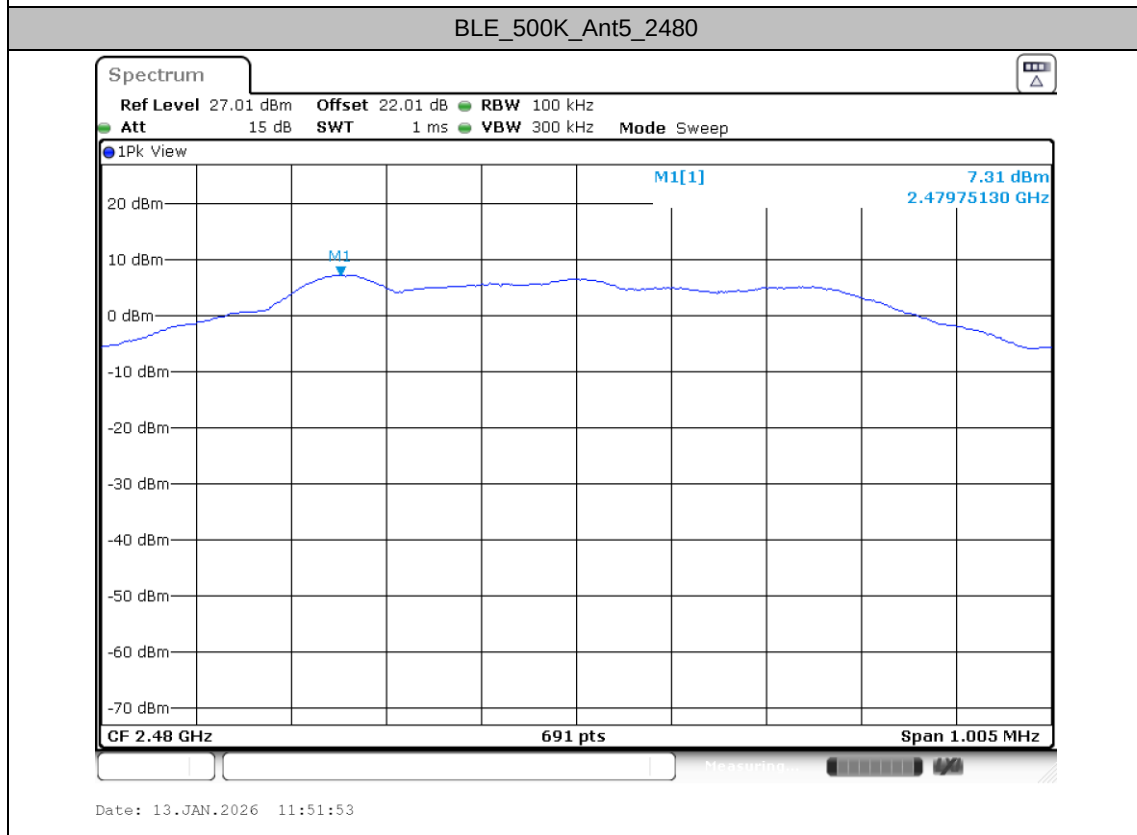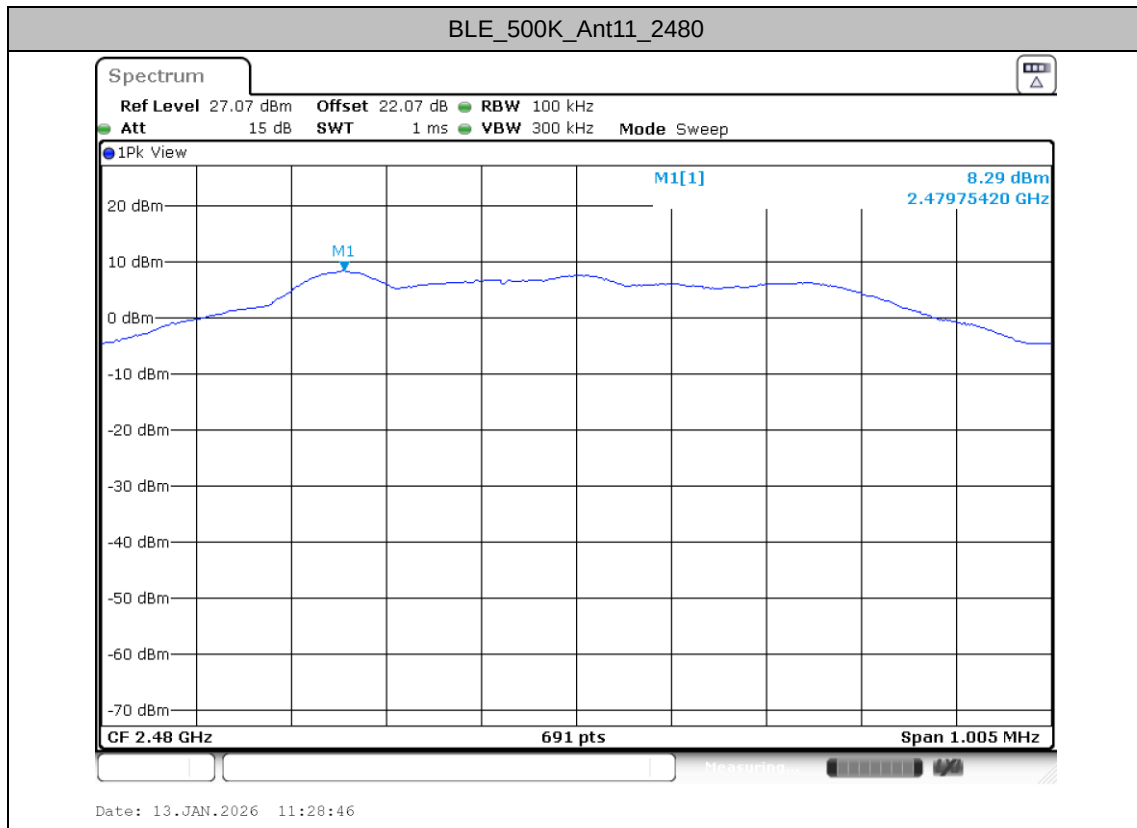




Band edge measurements


Test Result


TestMode	Antenna	ChName	Freq(MHz)	RefLevel[dBm/100KHz]	Result[dBm/100KHz]	Limit[dBm/100KHz]	Verdict
BLE_1M	Ant11	Low	2402	7.85	-48.42	≤ -12.15	PASS
	Ant5	Low	2402	8.39	-48.15	≤ -11.61	PASS
	Ant11	High	2480	7.48	-48.17	≤ -12.52	PASS
	Ant5	High	2480	6.57	-47.87	≤ -13.43	PASS
BLE_2M	Ant11	Low	2404	6.93	-48.01	≤ -13.07	PASS
	Ant5	Low	2404	6.45	-47.6	≤ -13.55	PASS
	Ant11	High	2478	7.21	-47.47	≤ -12.79	PASS
	Ant5	High	2478	6.40	-47.7	≤ -13.6	PASS
BLE_125K	Ant11	Low	2402	5.22	-48.51	≤ -14.78	PASS
	Ant5	Low	2402	5.88	-48.36	≤ -14.12	PASS
	Ant11	High	2480	4.85	-48.02	≤ -15.15	PASS
	Ant5	High	2480	4.06	-47	≤ -15.94	PASS
BLE_500K	Ant11	Low	2402	8.48	-48.54	≤ -11.52	PASS
	Ant5	Low	2402	8.90	-48.15	≤ -11.1	PASS
	Ant11	High	2480	8.29	-47.42	≤ -11.71	PASS
	Ant5	High	2480	7.31	-47.86	≤ -12.69	PASS





Test Graphs

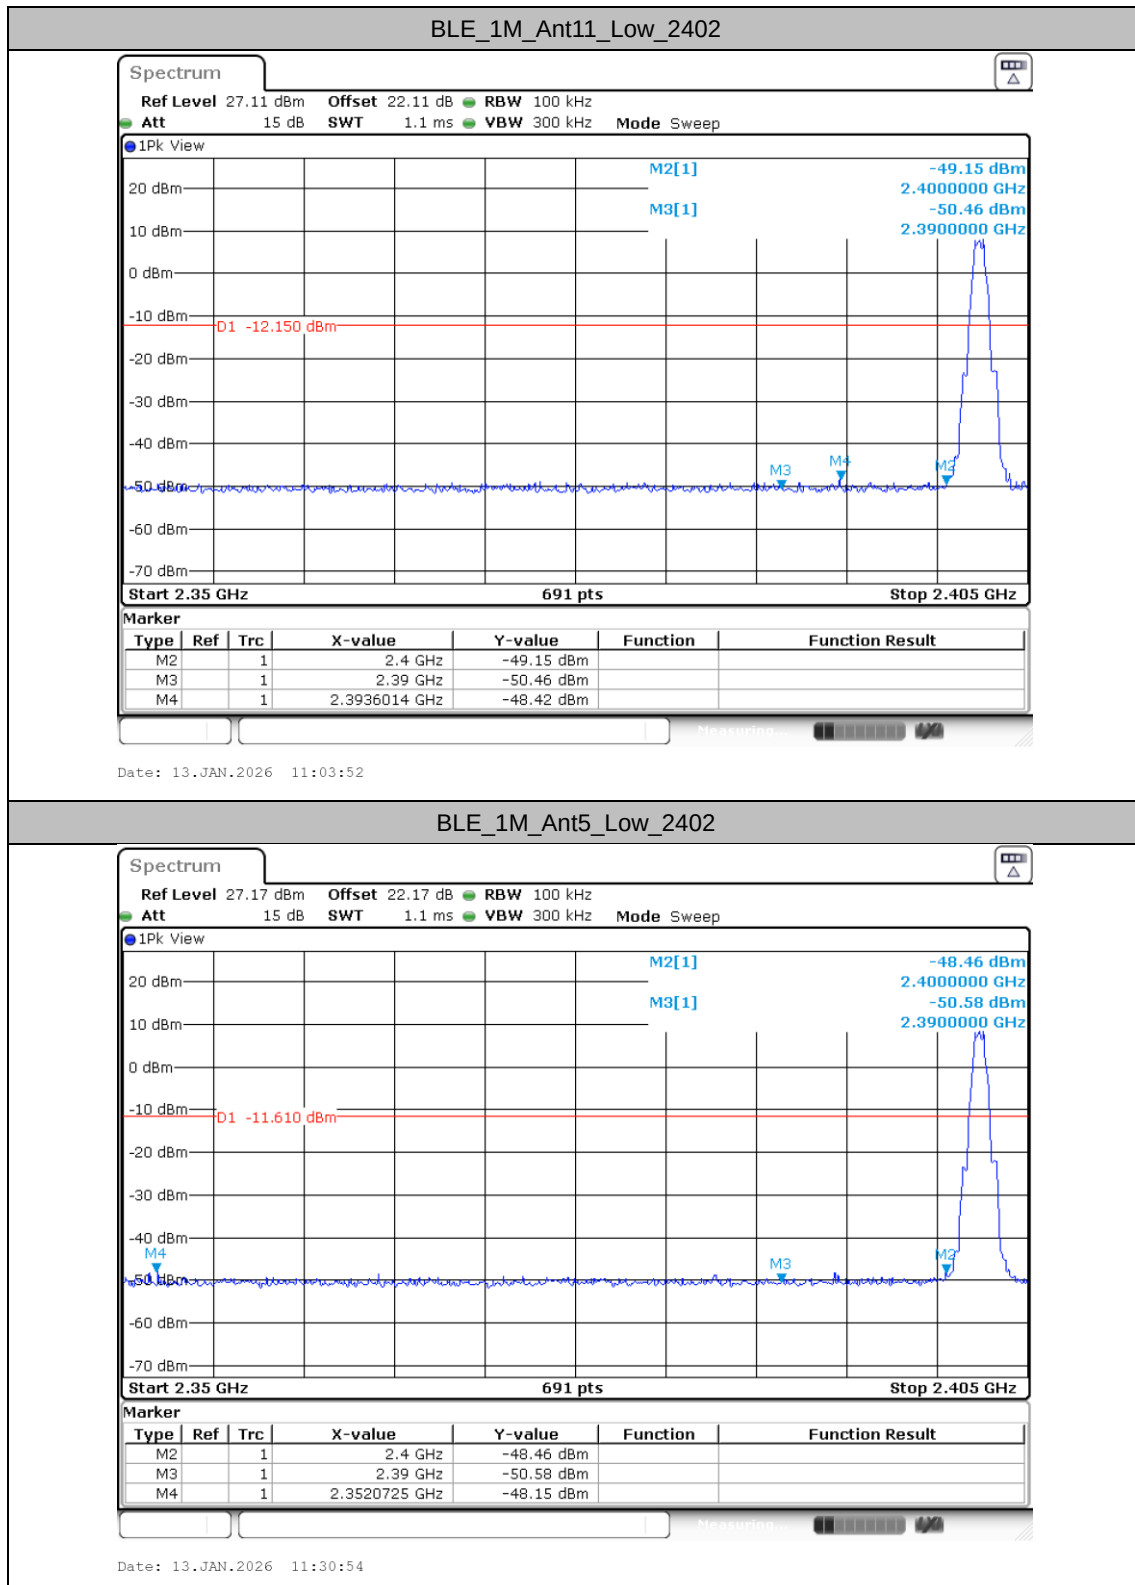



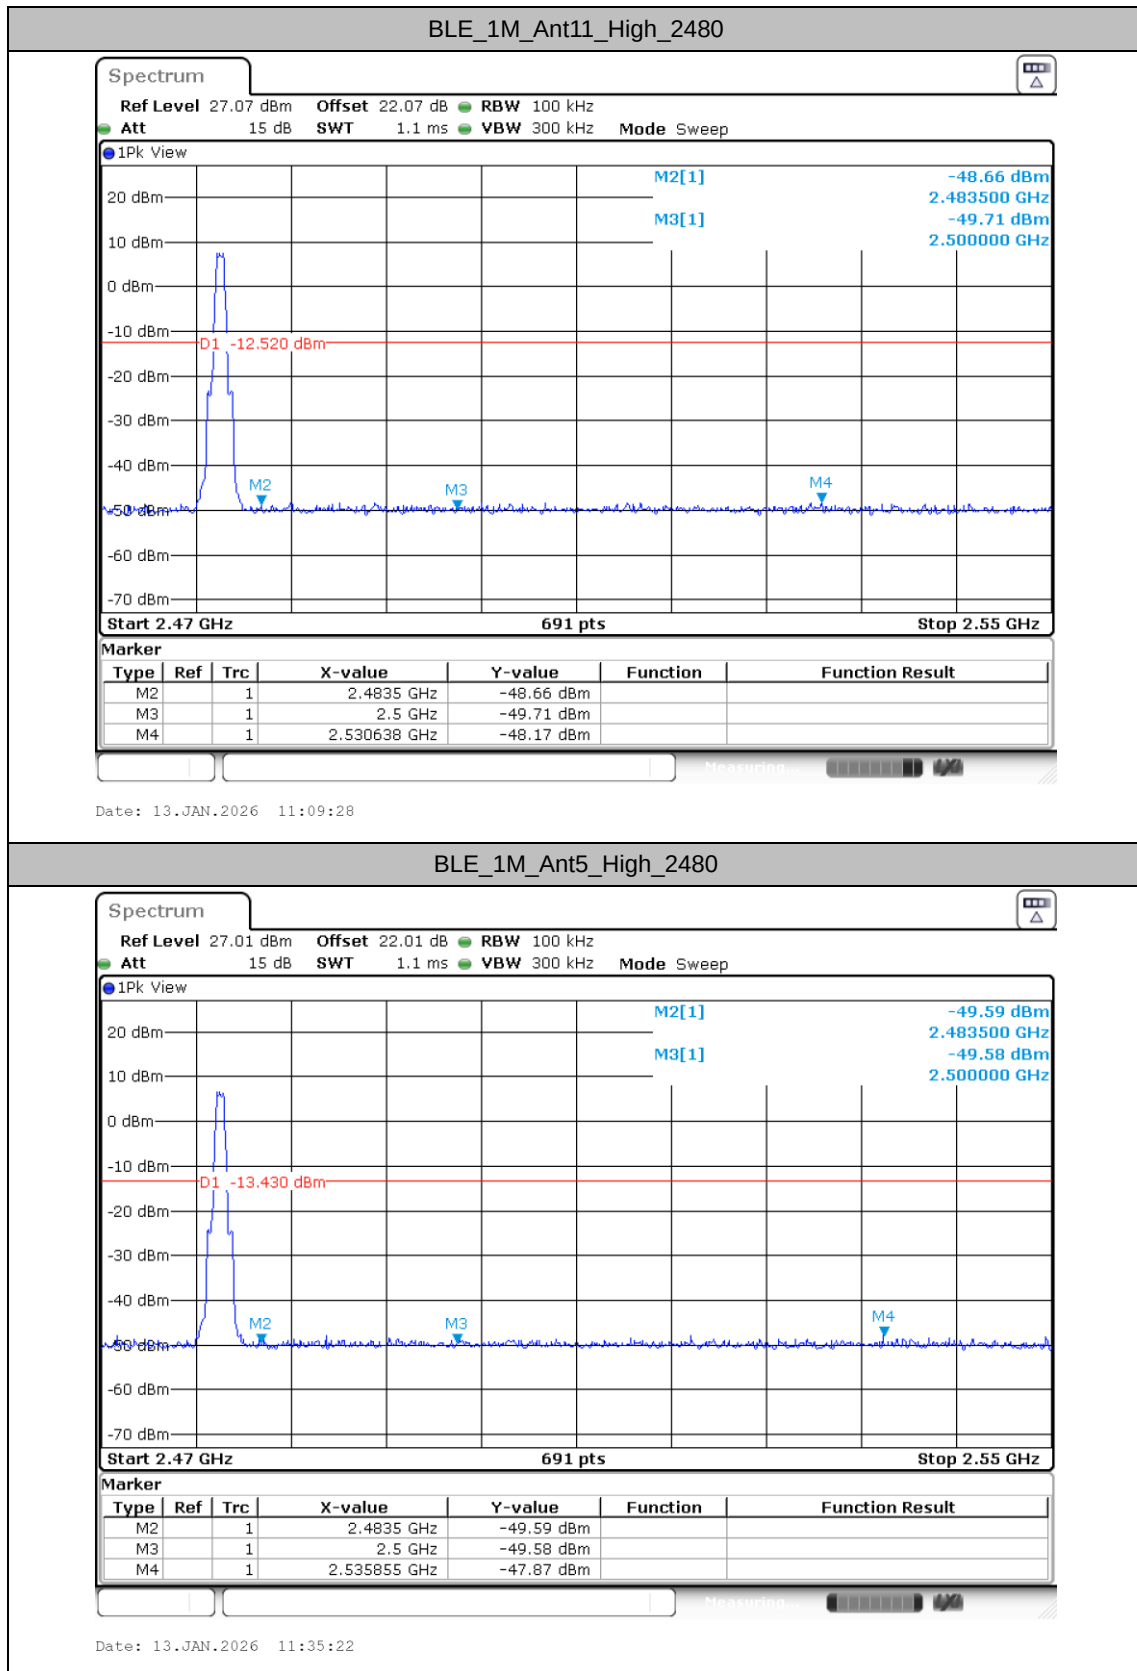


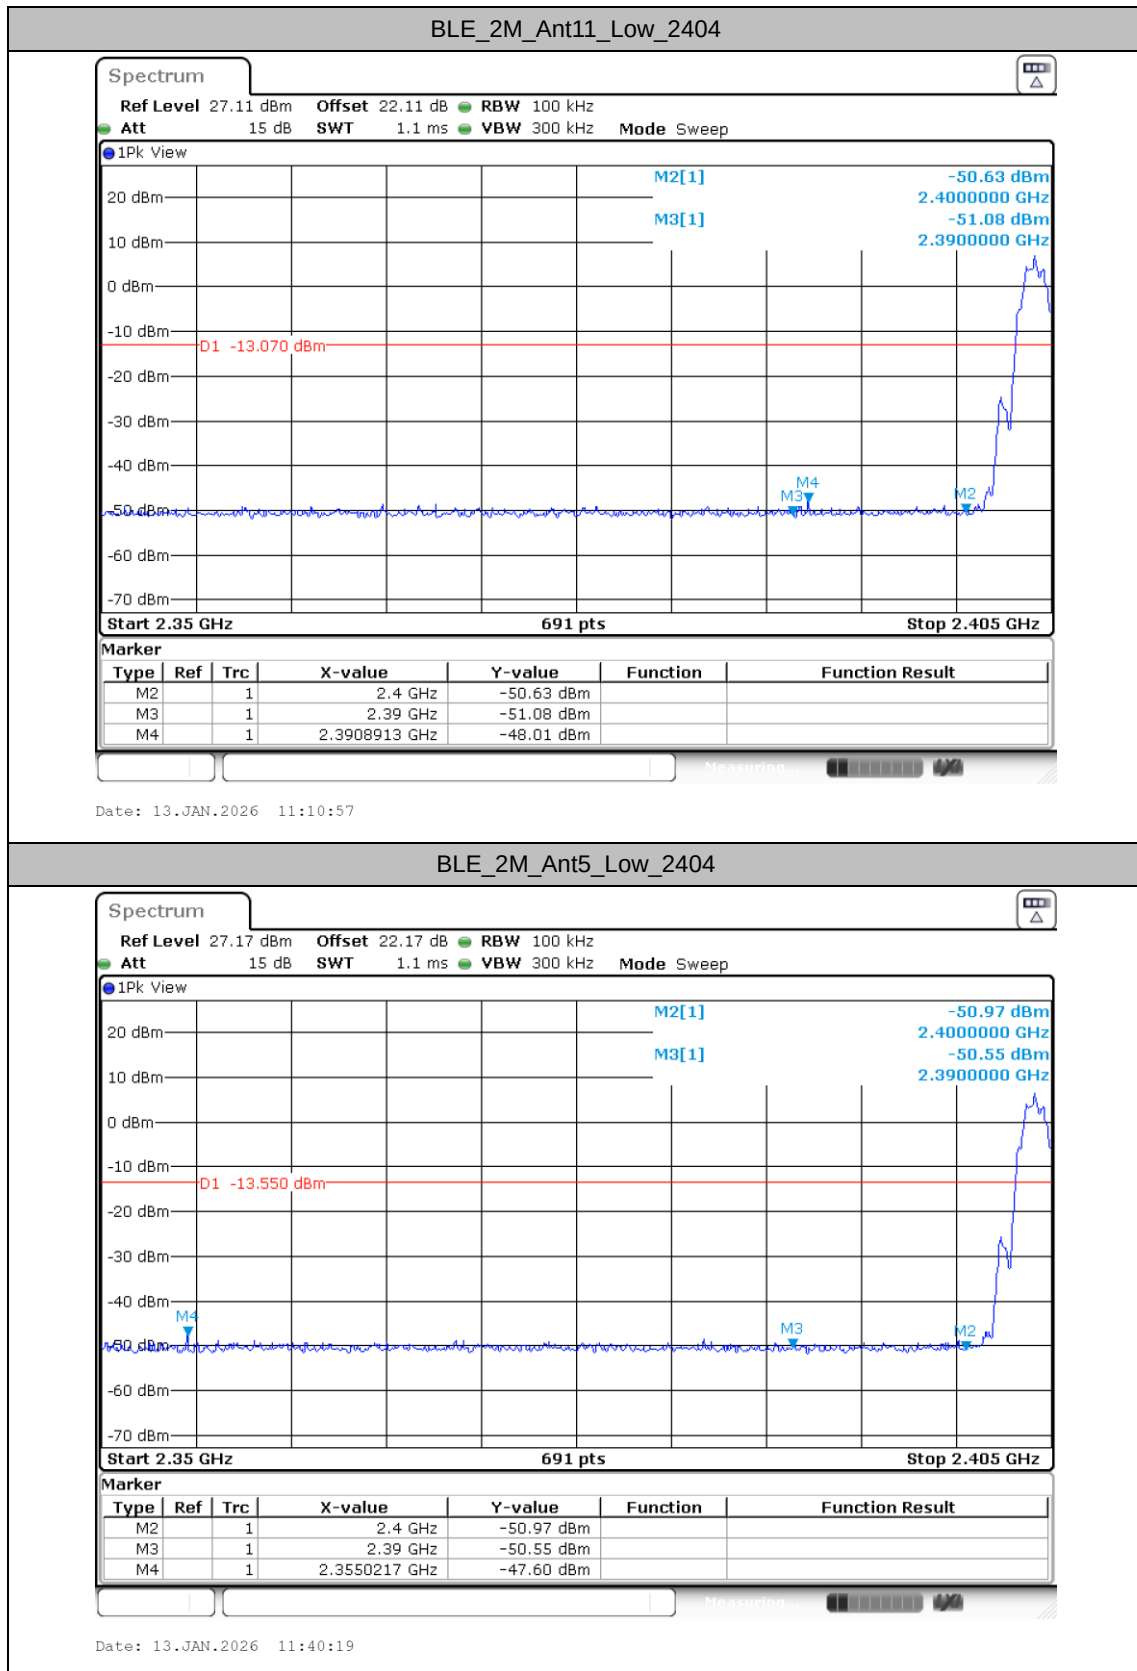


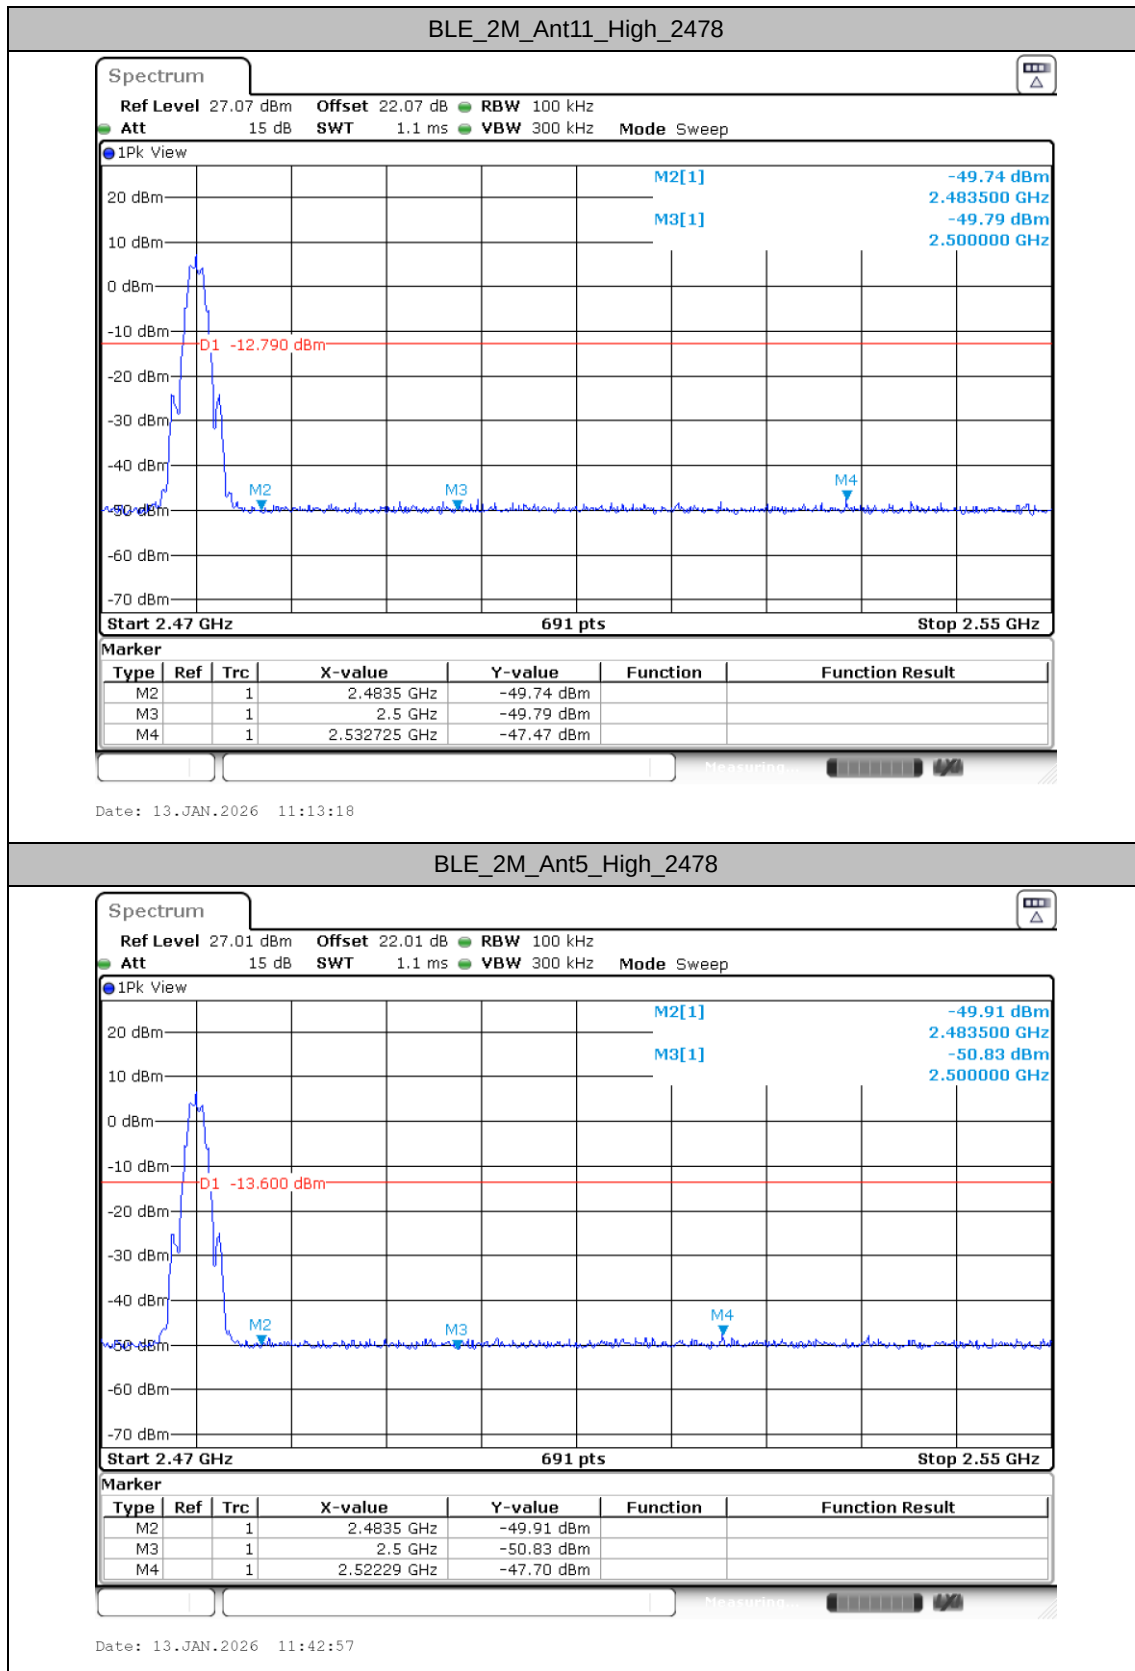

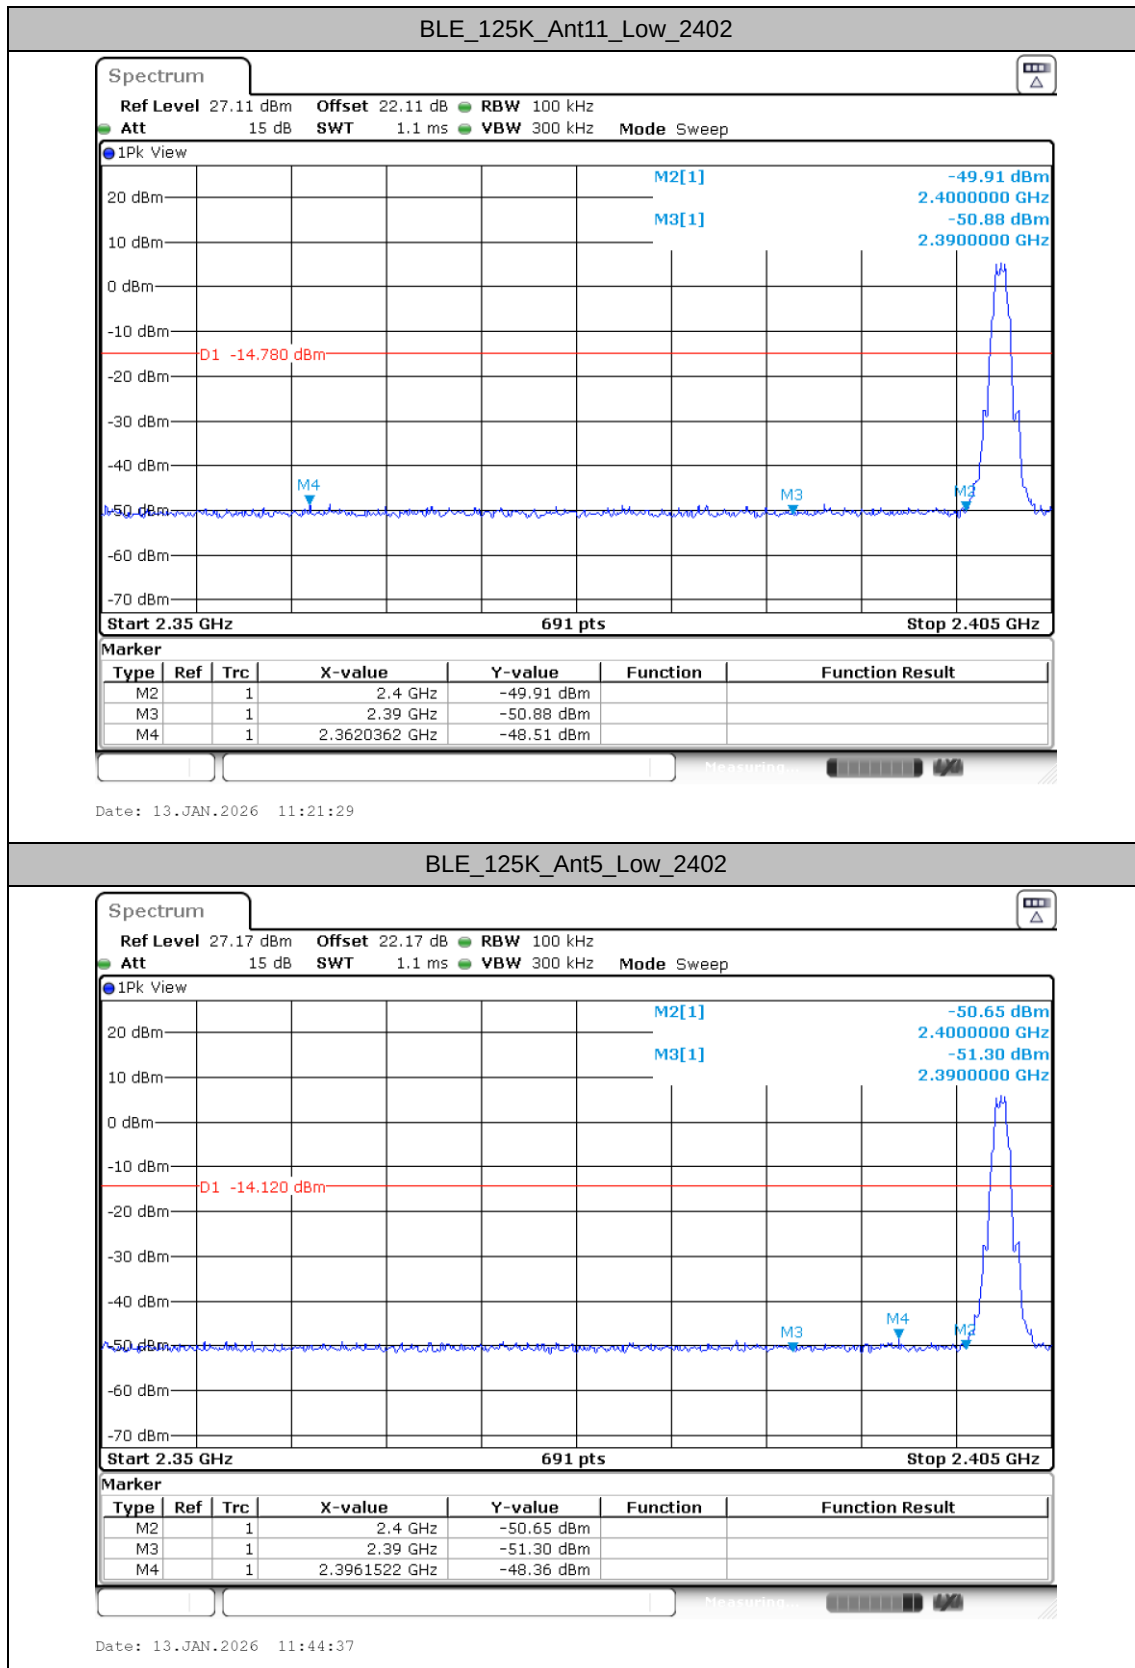

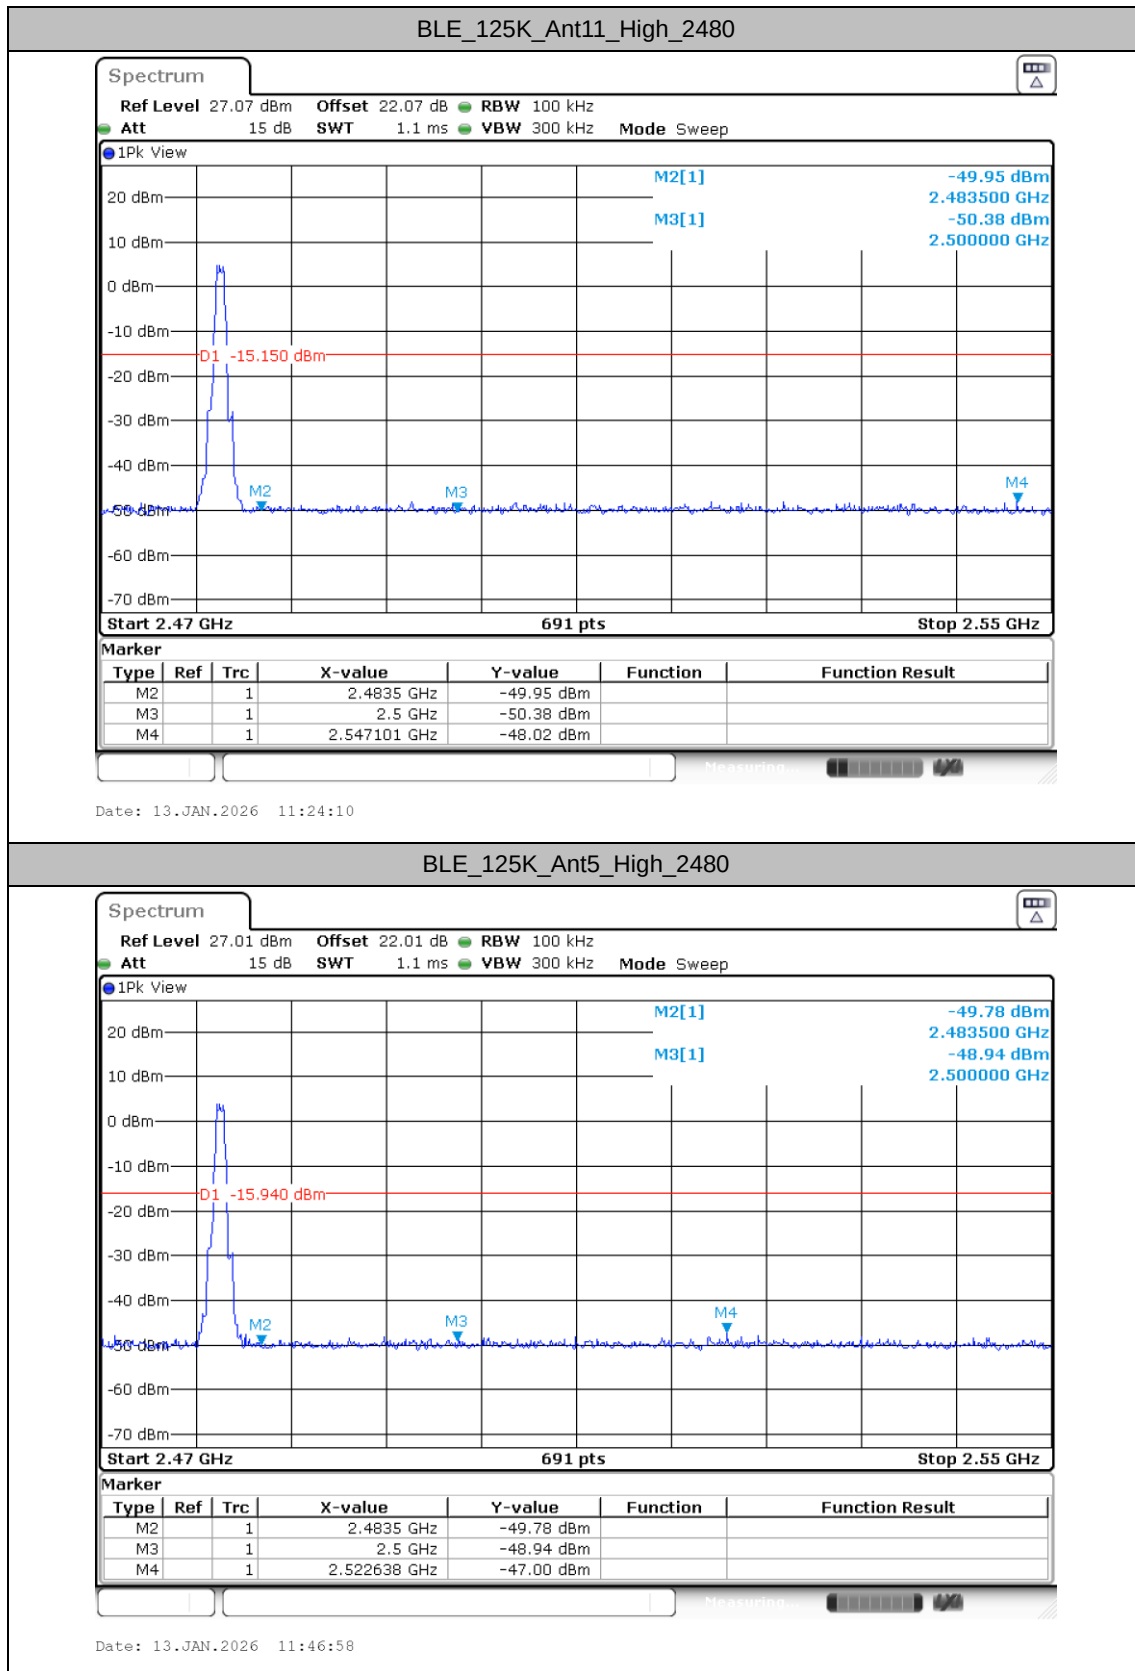

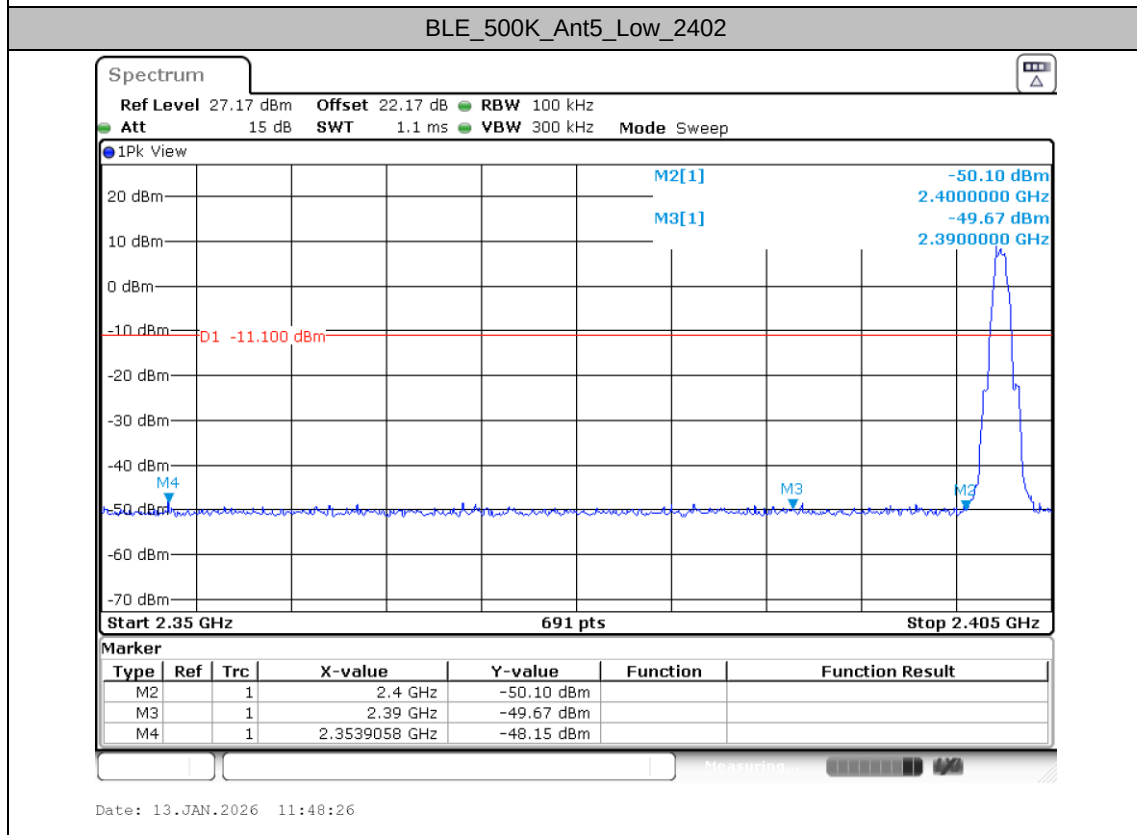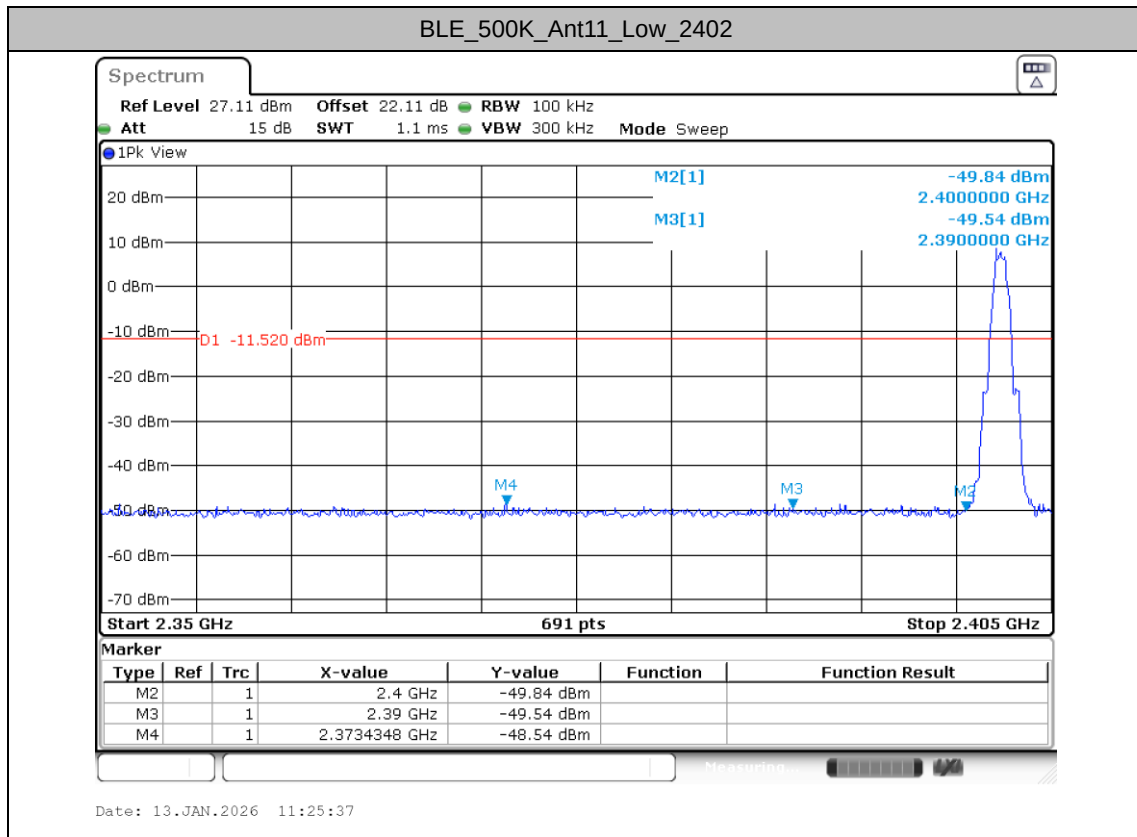

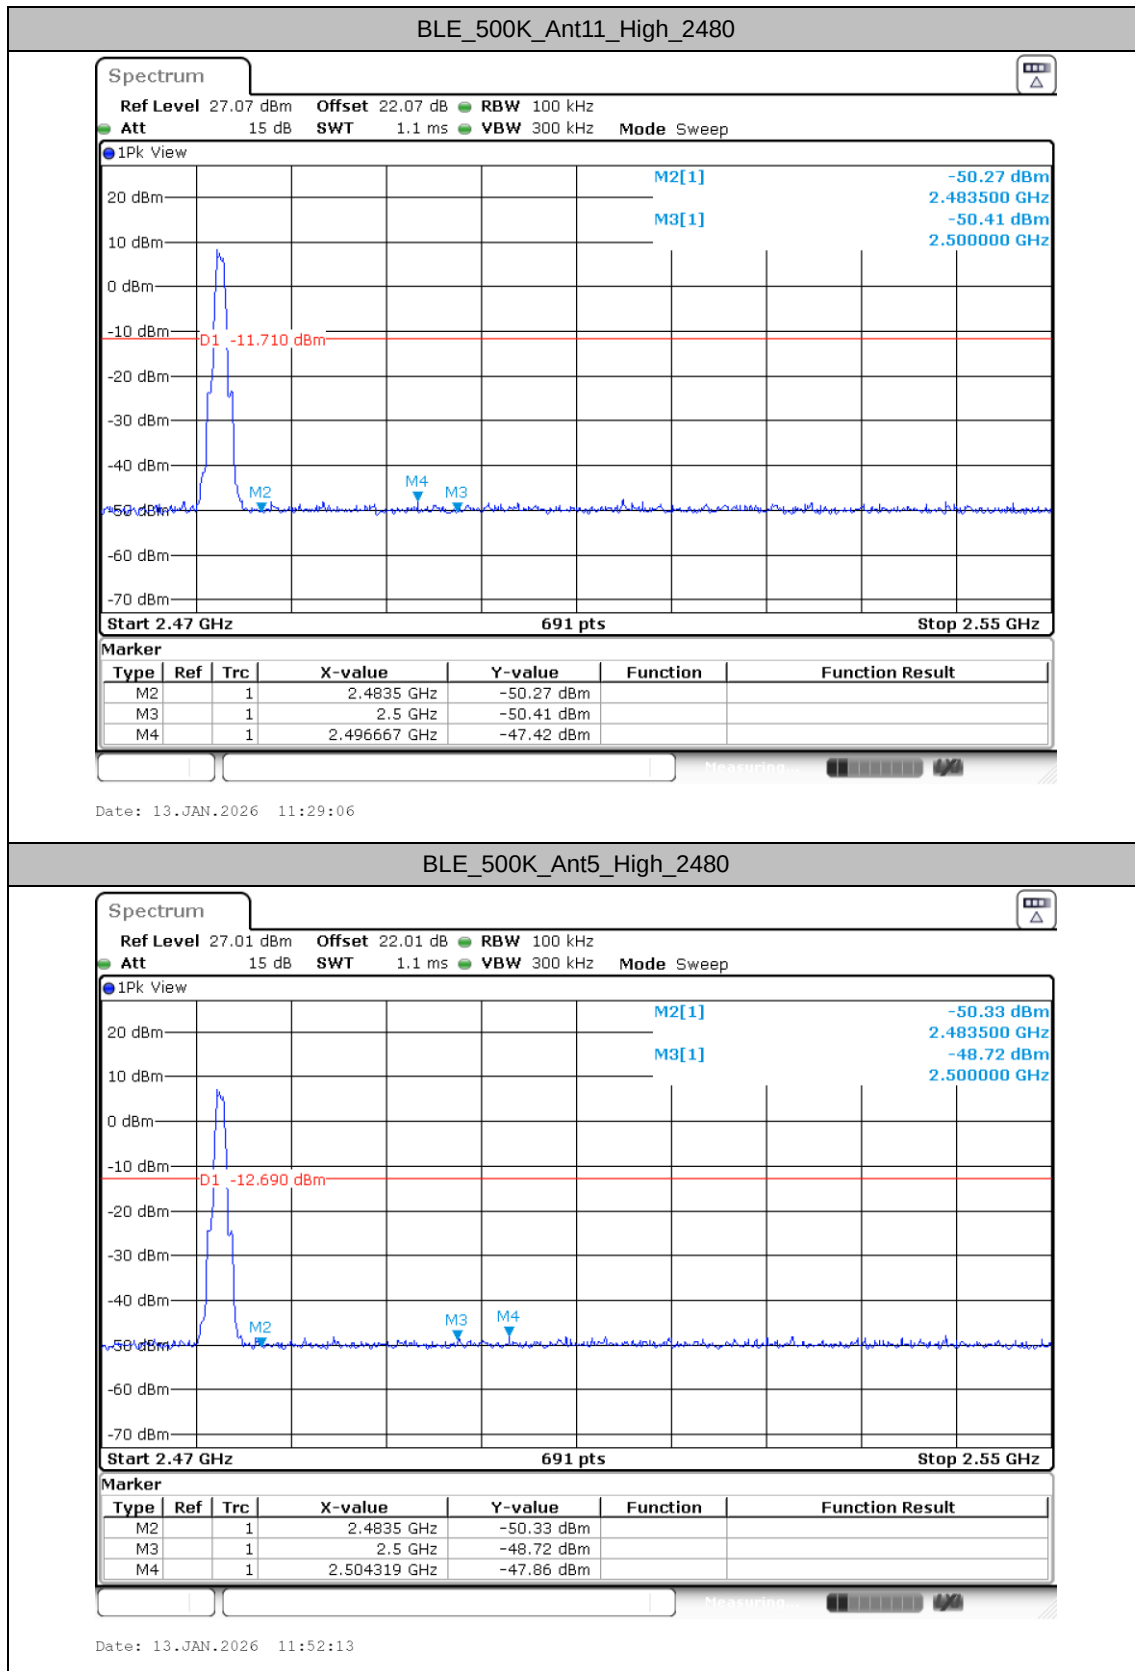




Conducted Spurious Emission


Test Result


TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
BLE_1M	Ant11	2402	30~1000	7.85	-45.08	≤-12.15	PASS
			1000~26500	7.85	-36.25	≤-12.15	PASS
	Ant5	2402	30~1000	8.39	-44.64	≤-11.61	PASS
			1000~26500	8.39	-35.3	≤-11.61	PASS
	Ant11	2440	30~1000	6.99	-44.6	≤-13.01	PASS
			1000~26500	6.99	-36.2	≤-13.01	PASS
	Ant5	2440	30~1000	6.49	-44.18	≤-13.51	PASS
			1000~26500	6.49	-36.34	≤-13.51	PASS
	Ant11	2480	30~1000	7.48	-44.5	≤-12.52	PASS
			1000~26500	7.48	-36.19	≤-12.52	PASS
	Ant5	2480	30~1000	6.57	-44.42	≤-13.43	PASS
			1000~26500	6.57	-36.66	≤-13.43	PASS
BLE_2M	Ant11	2404	30~1000	6.93	-45.16	≤-13.07	PASS
			1000~26500	6.93	-36.21	≤-13.07	PASS
	Ant5	2404	30~1000	6.45	-45.05	≤-13.55	PASS
			1000~26500	6.45	-36.46	≤-13.55	PASS
	Ant11	2440	30~1000	6.84	-44.23	≤-13.16	PASS
			1000~26500	6.84	-35.69	≤-13.16	PASS
	Ant5	2440	30~1000	6.23	-45.28	≤-13.77	PASS
			1000~26500	6.23	-36.35	≤-13.77	PASS
	Ant11	2478	30~1000	7.21	-44	≤-12.79	PASS
			1000~26500	7.21	-35.82	≤-12.79	PASS
	Ant5	2478	30~1000	6.40	-45.38	≤-13.6	PASS
			1000~26500	6.40	-35.91	≤-13.6	PASS
BLE_125K	Ant11	2402	30~1000	5.22	-44.58	≤-14.78	PASS
			1000~26500	5.22	-35.85	≤-14.78	PASS
	Ant5	2402	30~1000	5.88	-44.77	≤-14.12	PASS
			1000~26500	5.88	-36.73	≤-14.12	PASS
	Ant11	2440	30~1000	4.46	-44.82	≤-15.54	PASS
			1000~26500	4.46	-36.02	≤-15.54	PASS
	Ant5	2440	30~1000	3.99	-45.4	≤-16.01	PASS
			1000~26500	3.99	-35.95	≤-16.01	PASS
	Ant11	2480	30~1000	4.85	-44.28	≤-15.15	PASS
			1000~26500	4.85	-36.53	≤-15.15	PASS
	Ant5	2480	30~1000	4.06	-45.08	≤-15.94	PASS
			1000~26500	4.06	-36.14	≤-15.94	PASS
BLE_500K	Ant11	2402	30~1000	8.48	-44.54	≤-11.52	PASS
			1000~26500	8.48	-34.89	≤-11.52	PASS
	Ant5	2402	30~1000	8.90	-44.7	≤-11.1	PASS
			1000~26500	8.90	-36.28	≤-11.1	PASS
	Ant11	2440	30~1000	7.69	-43.96	≤-12.31	PASS
			1000~26500	7.69	-35.35	≤-12.31	PASS
	Ant5	2440	30~1000	7.14	-44.79	≤-12.86	PASS
			1000~26500	7.14	-36.48	≤-12.86	PASS
	Ant11	2480	30~1000	8.29	-44.91	≤-11.71	PASS
			1000~26500	8.29	-35.69	≤-11.71	PASS
	Ant5	2480	30~1000	7.31	-44.93	≤-12.69	PASS
			1000~26500	7.31	-35.85	≤-12.69	PASS





Test Graphs

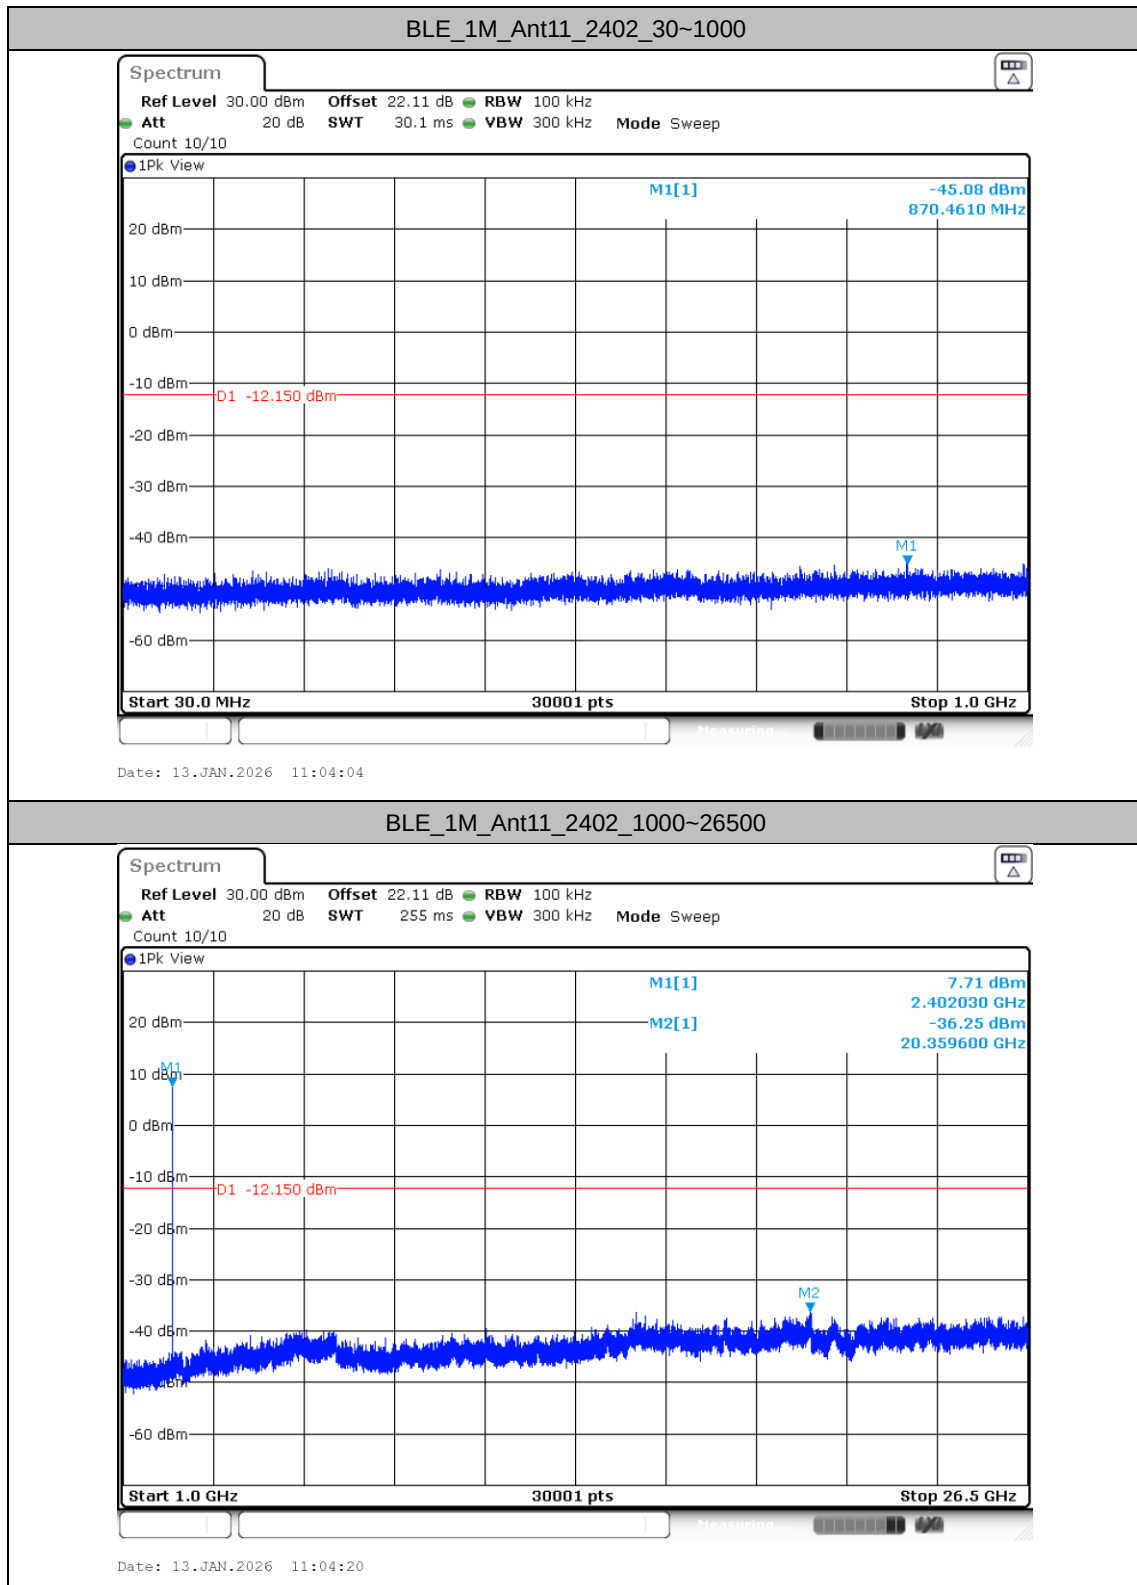



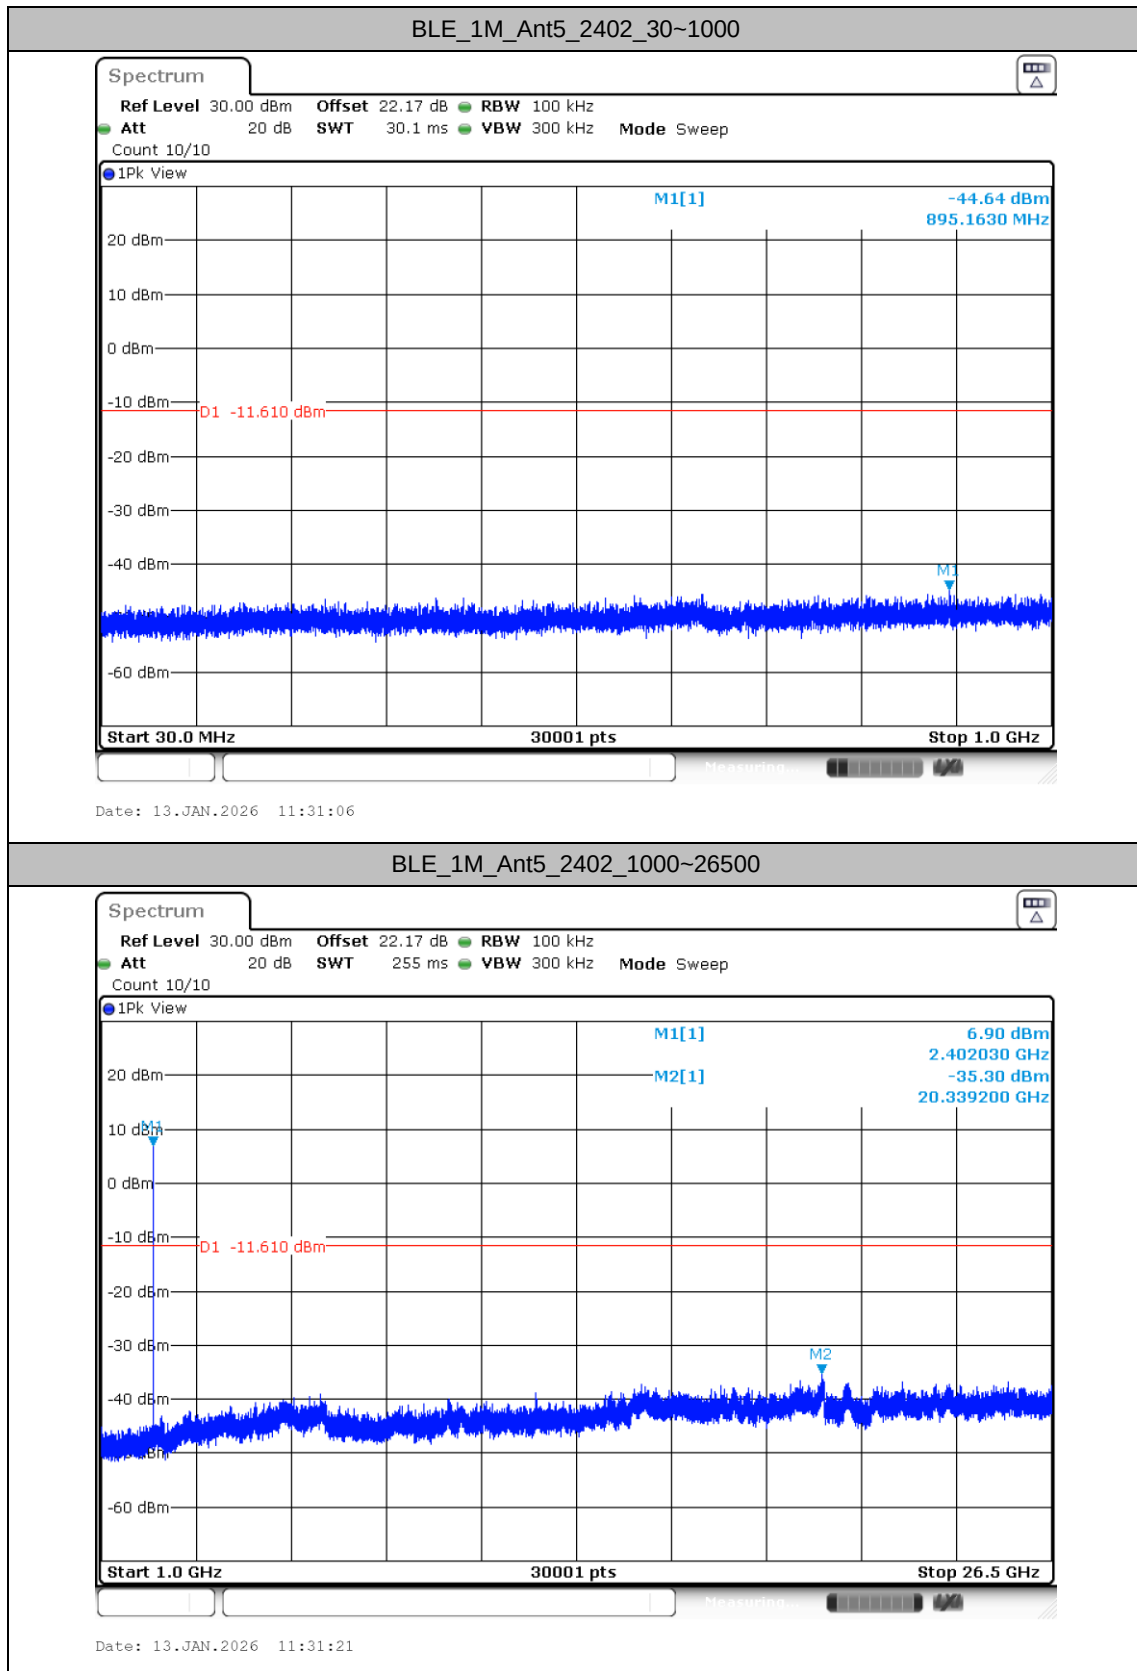



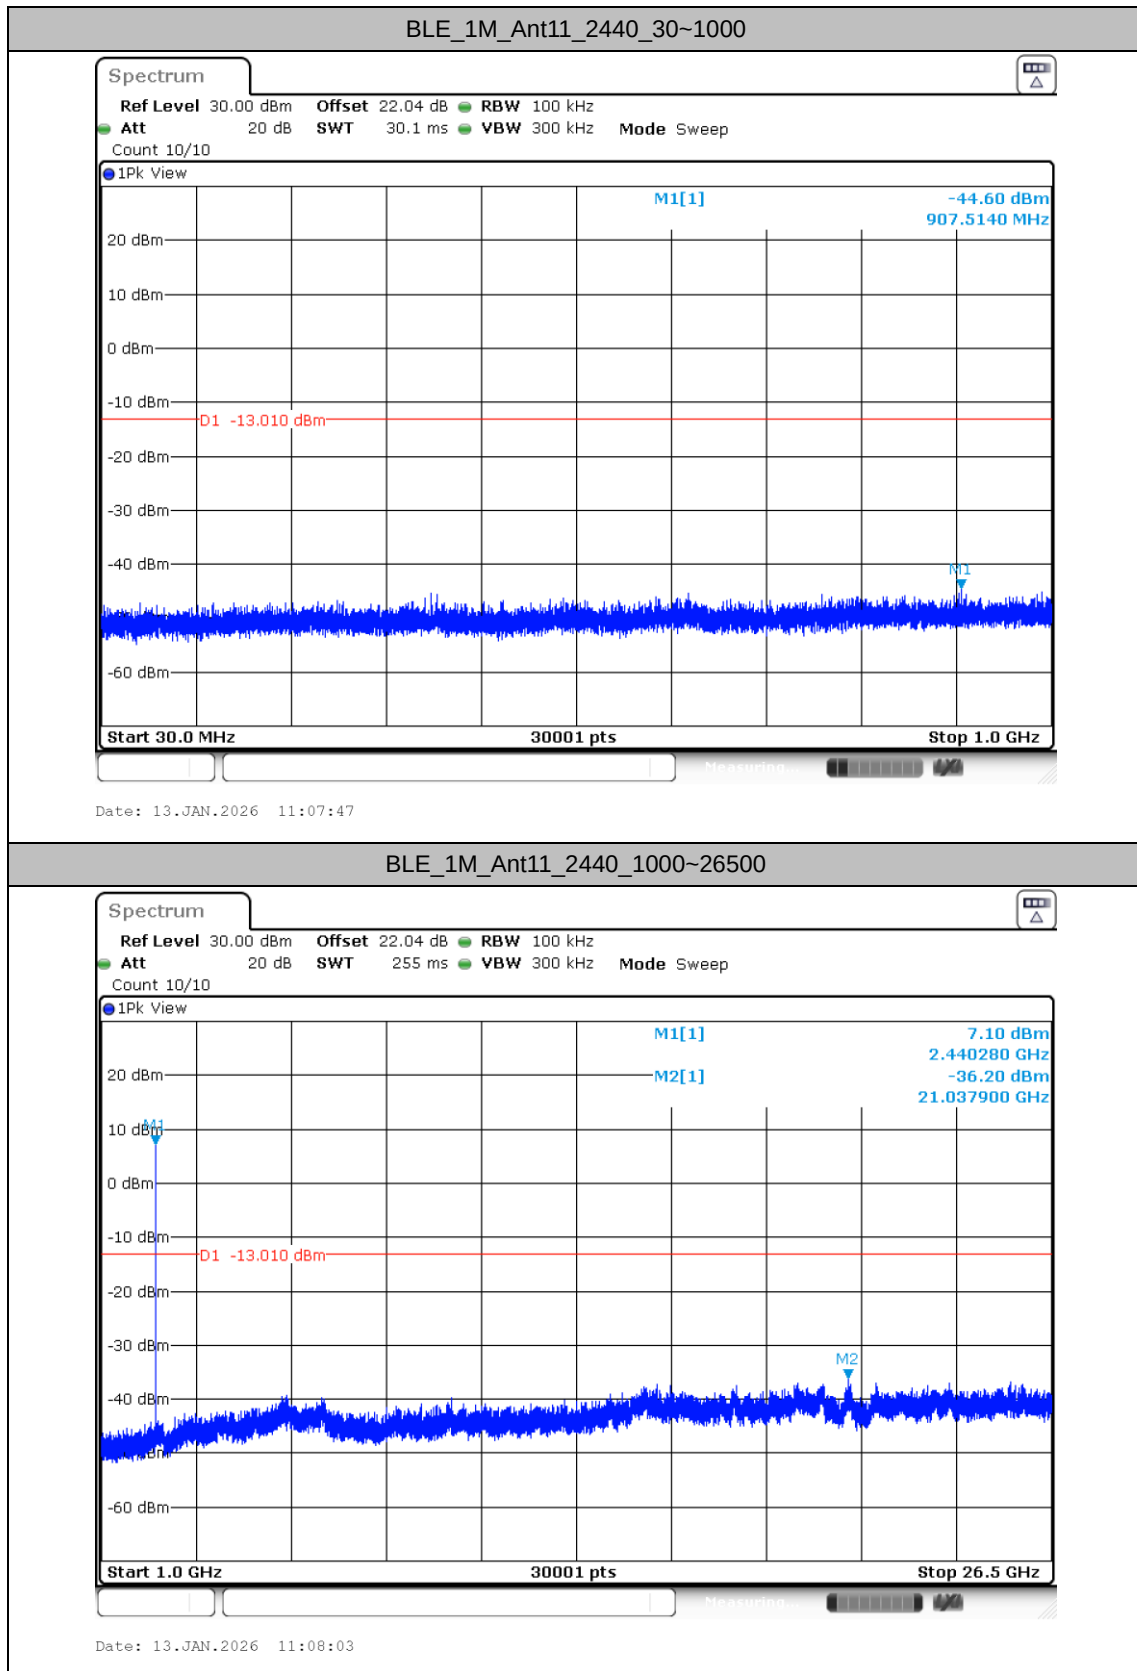


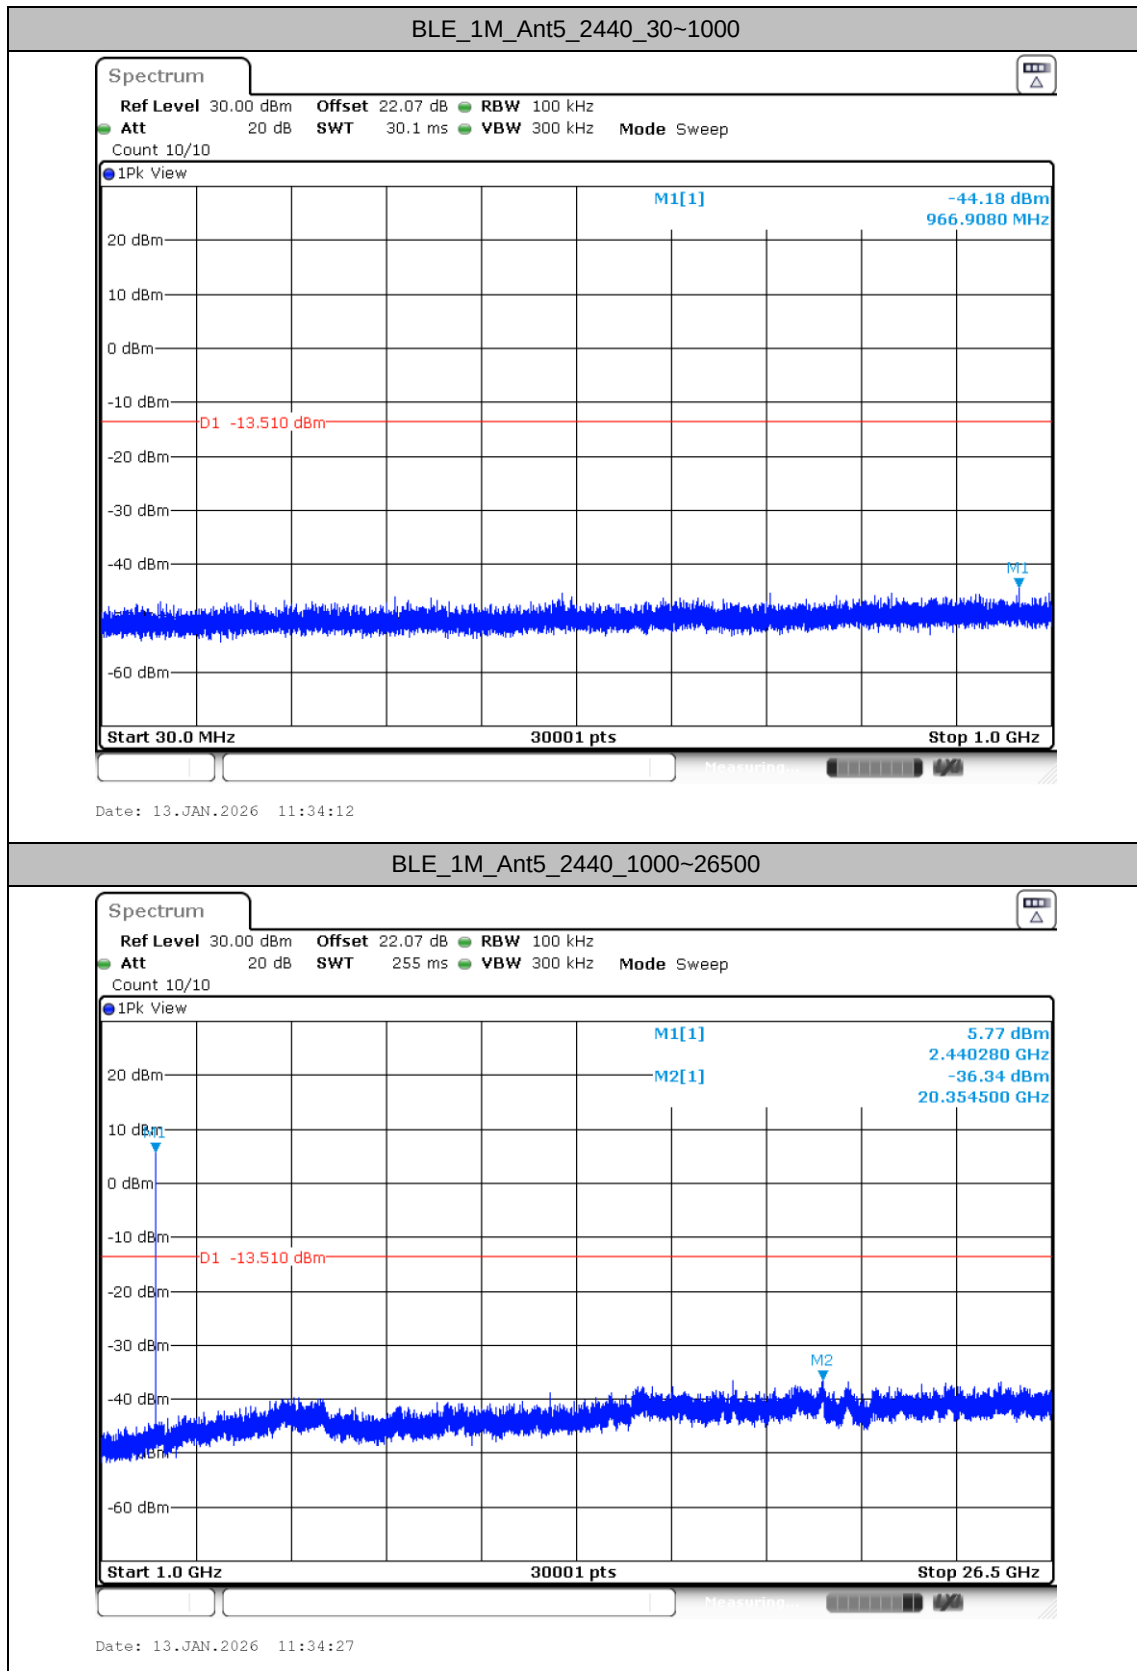


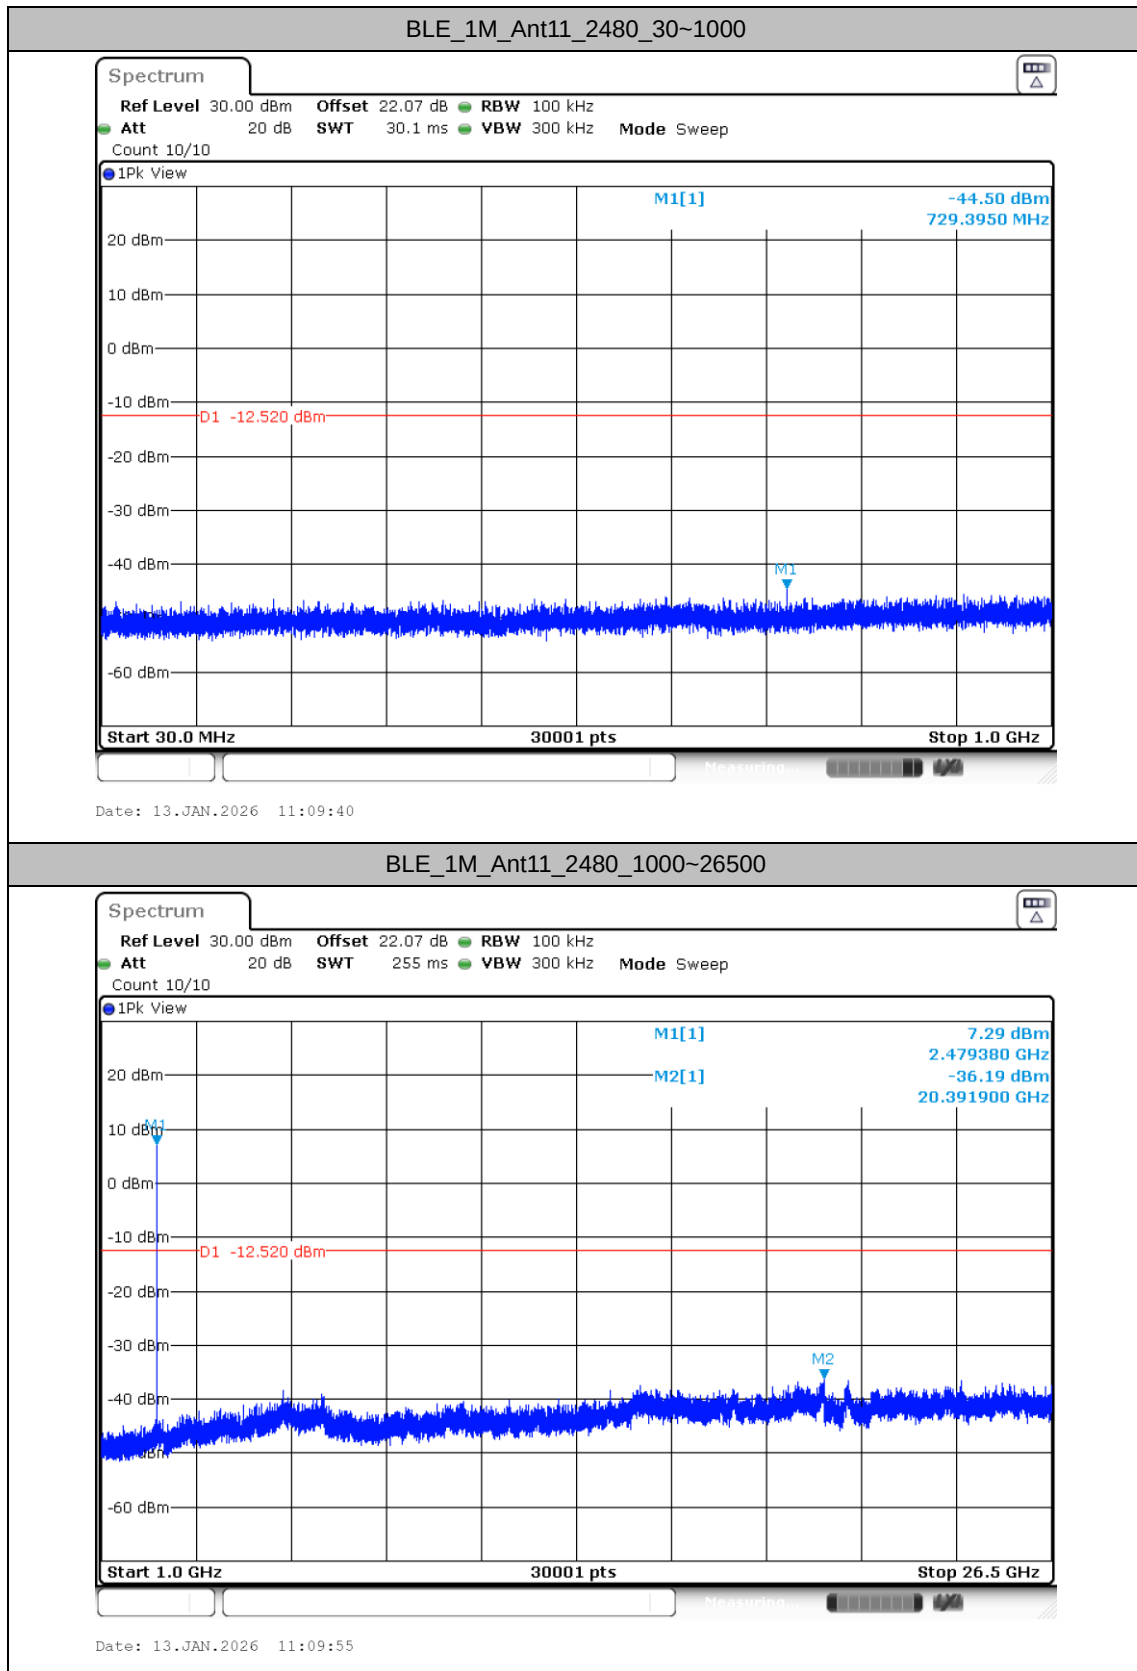


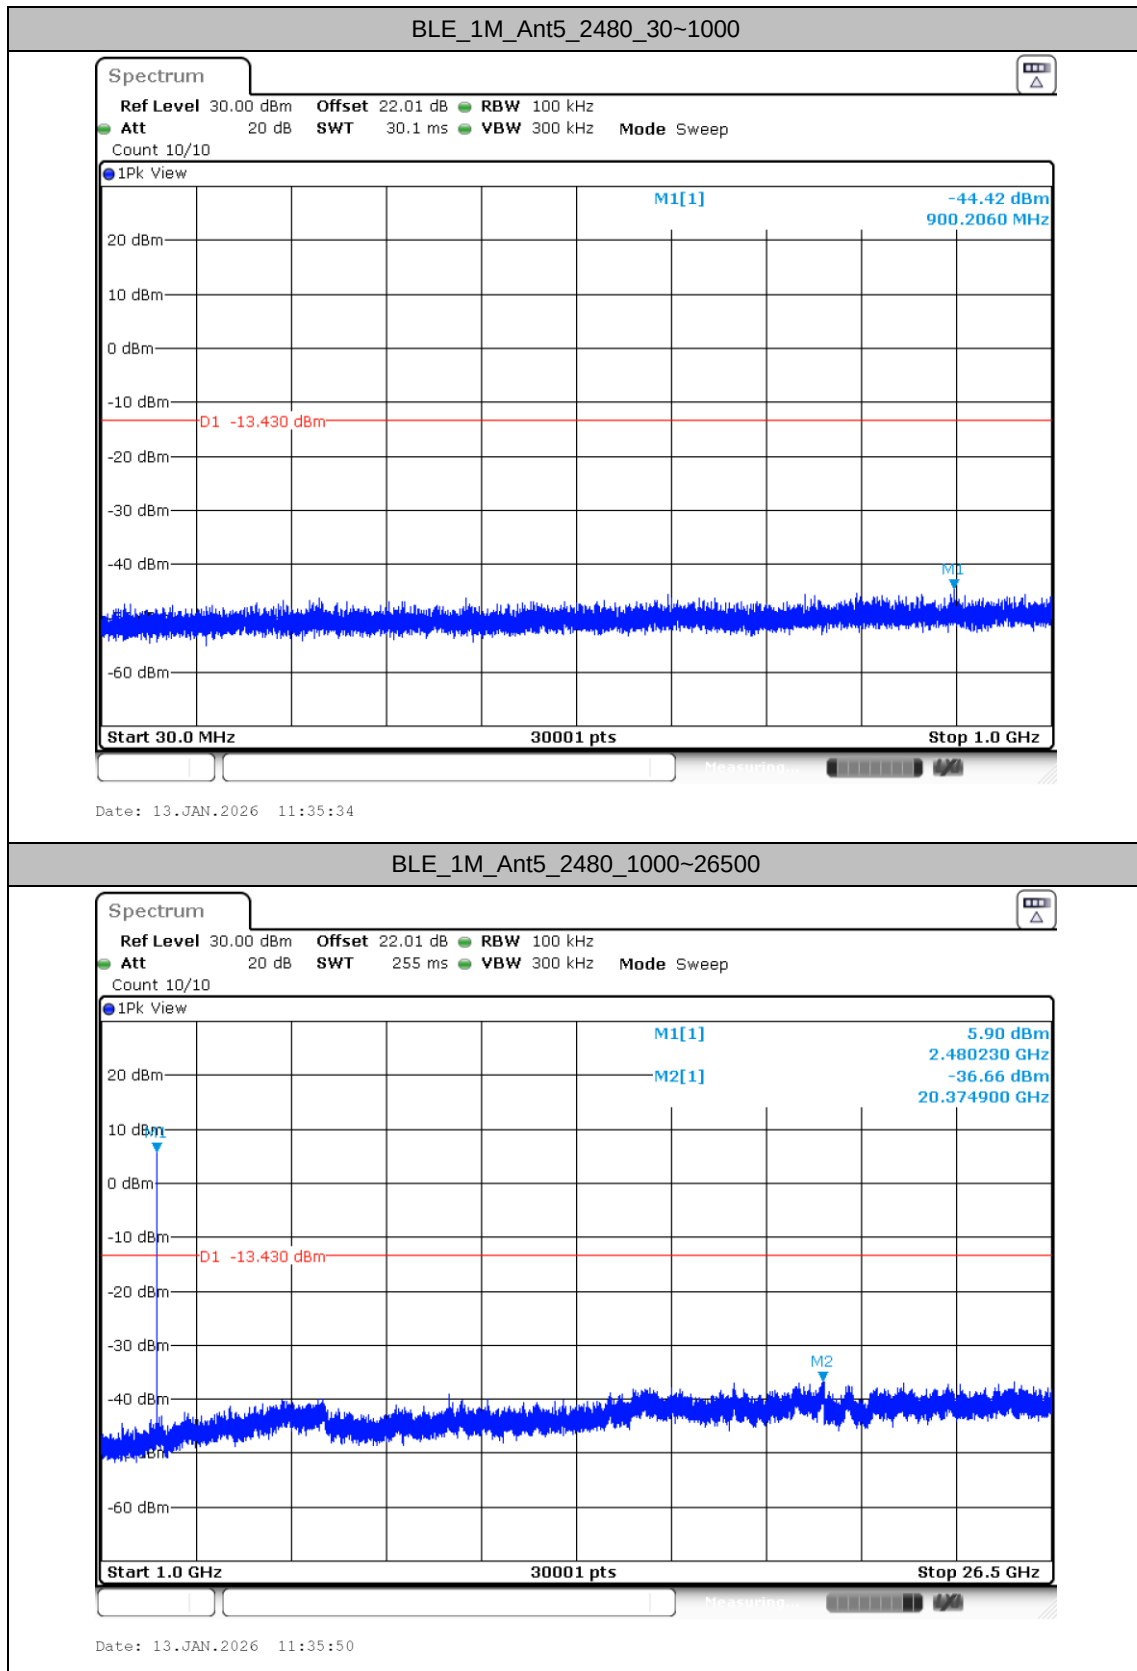


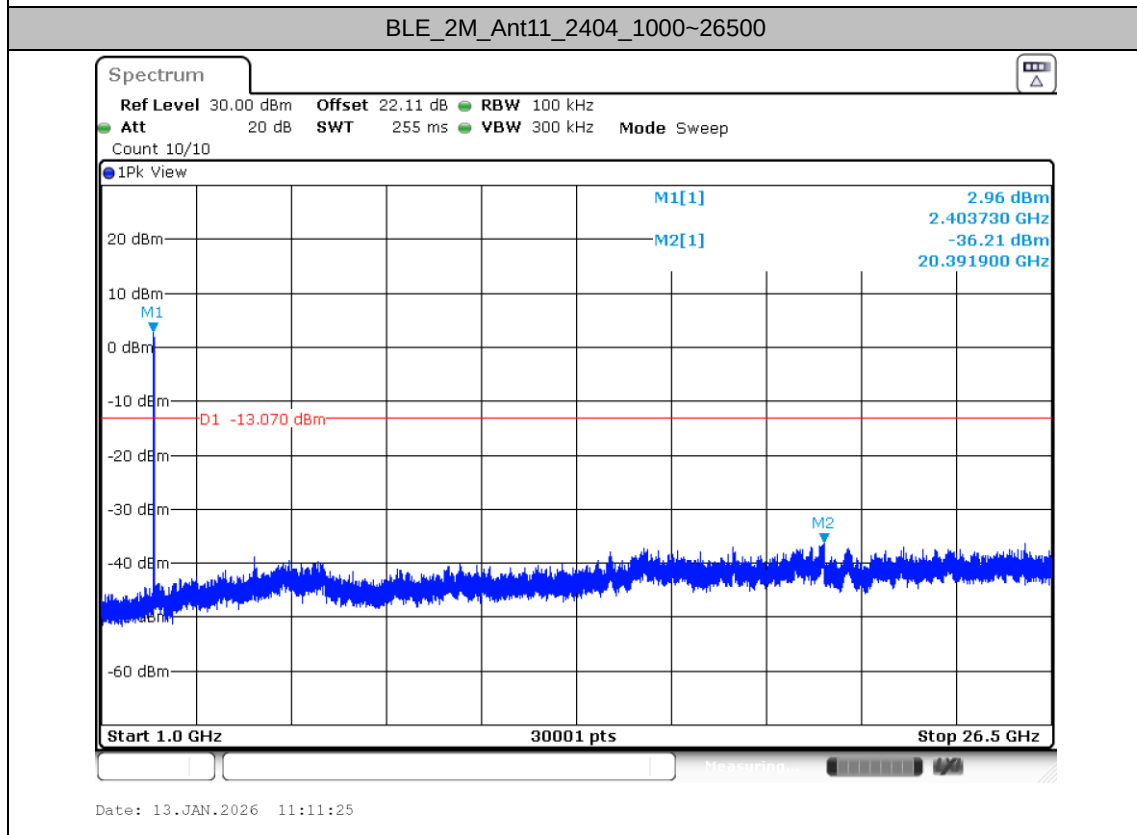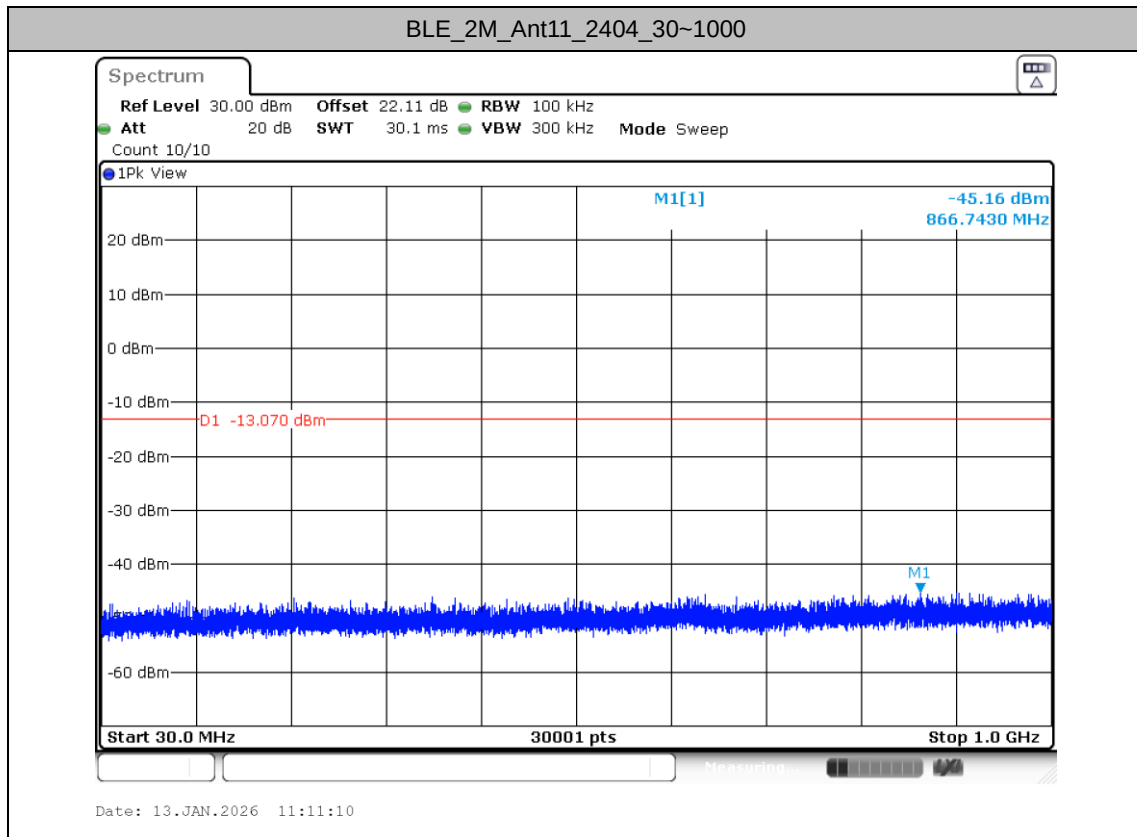


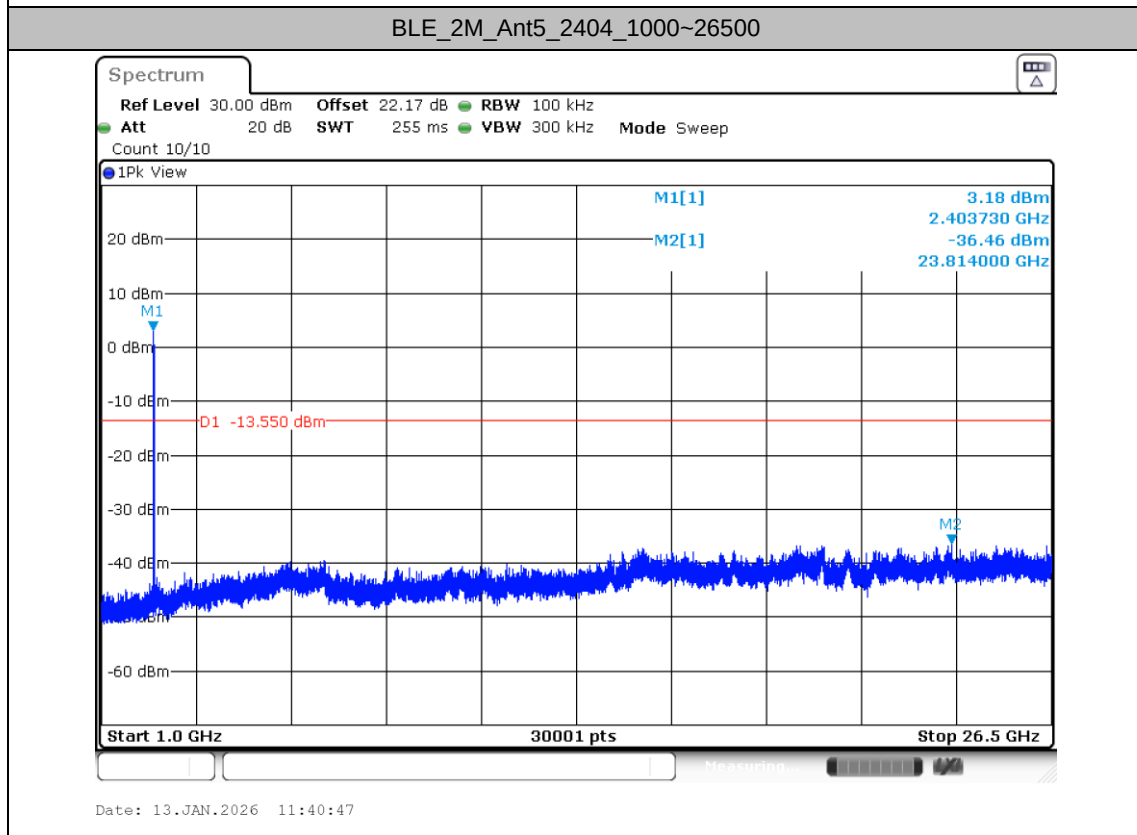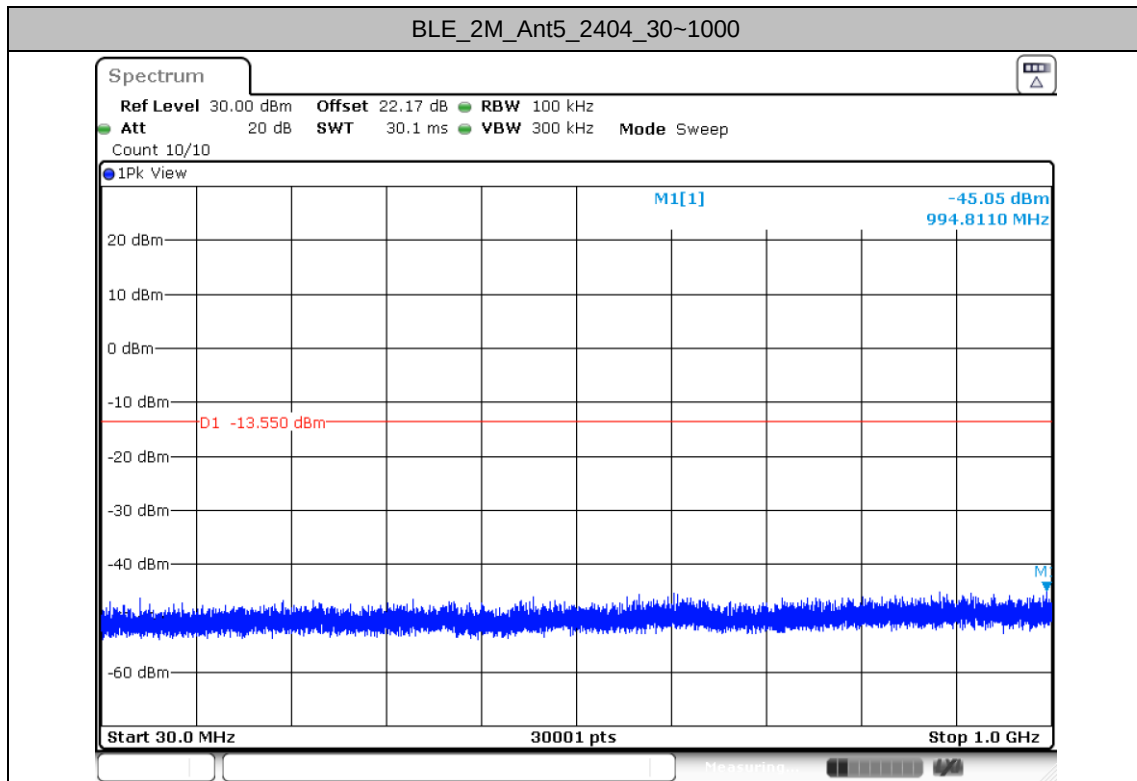


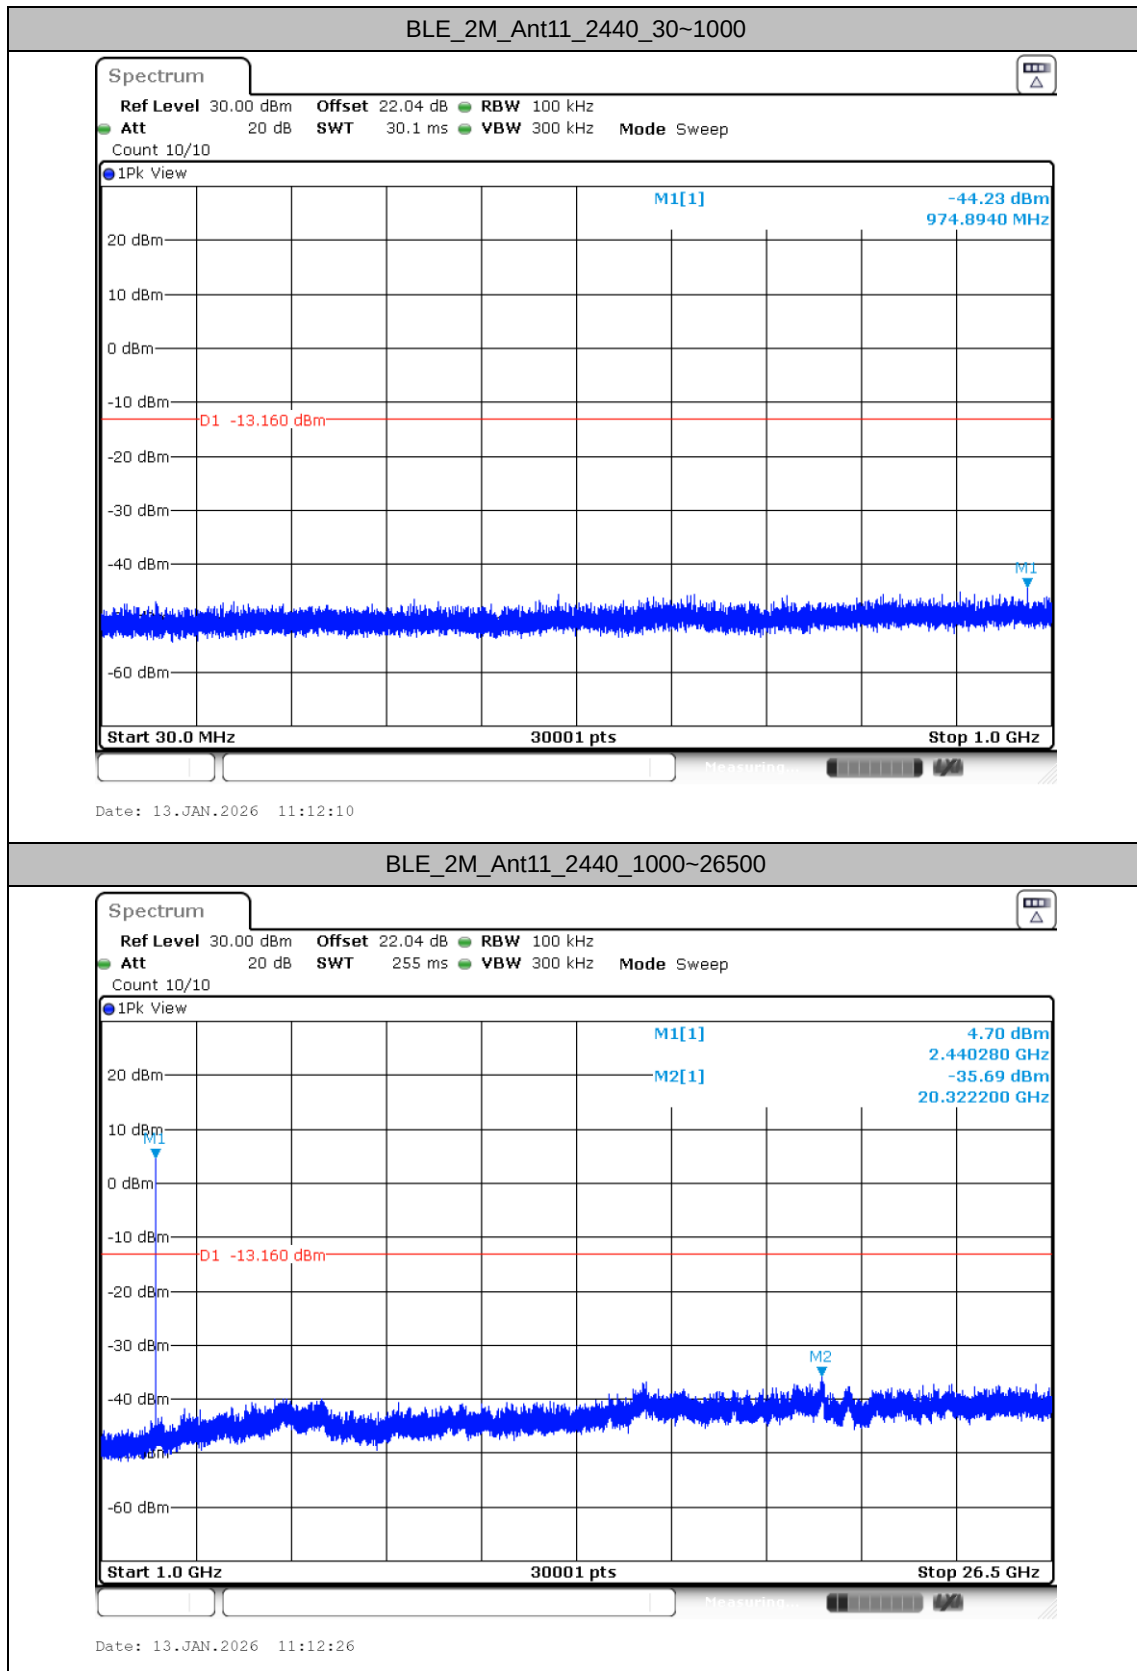


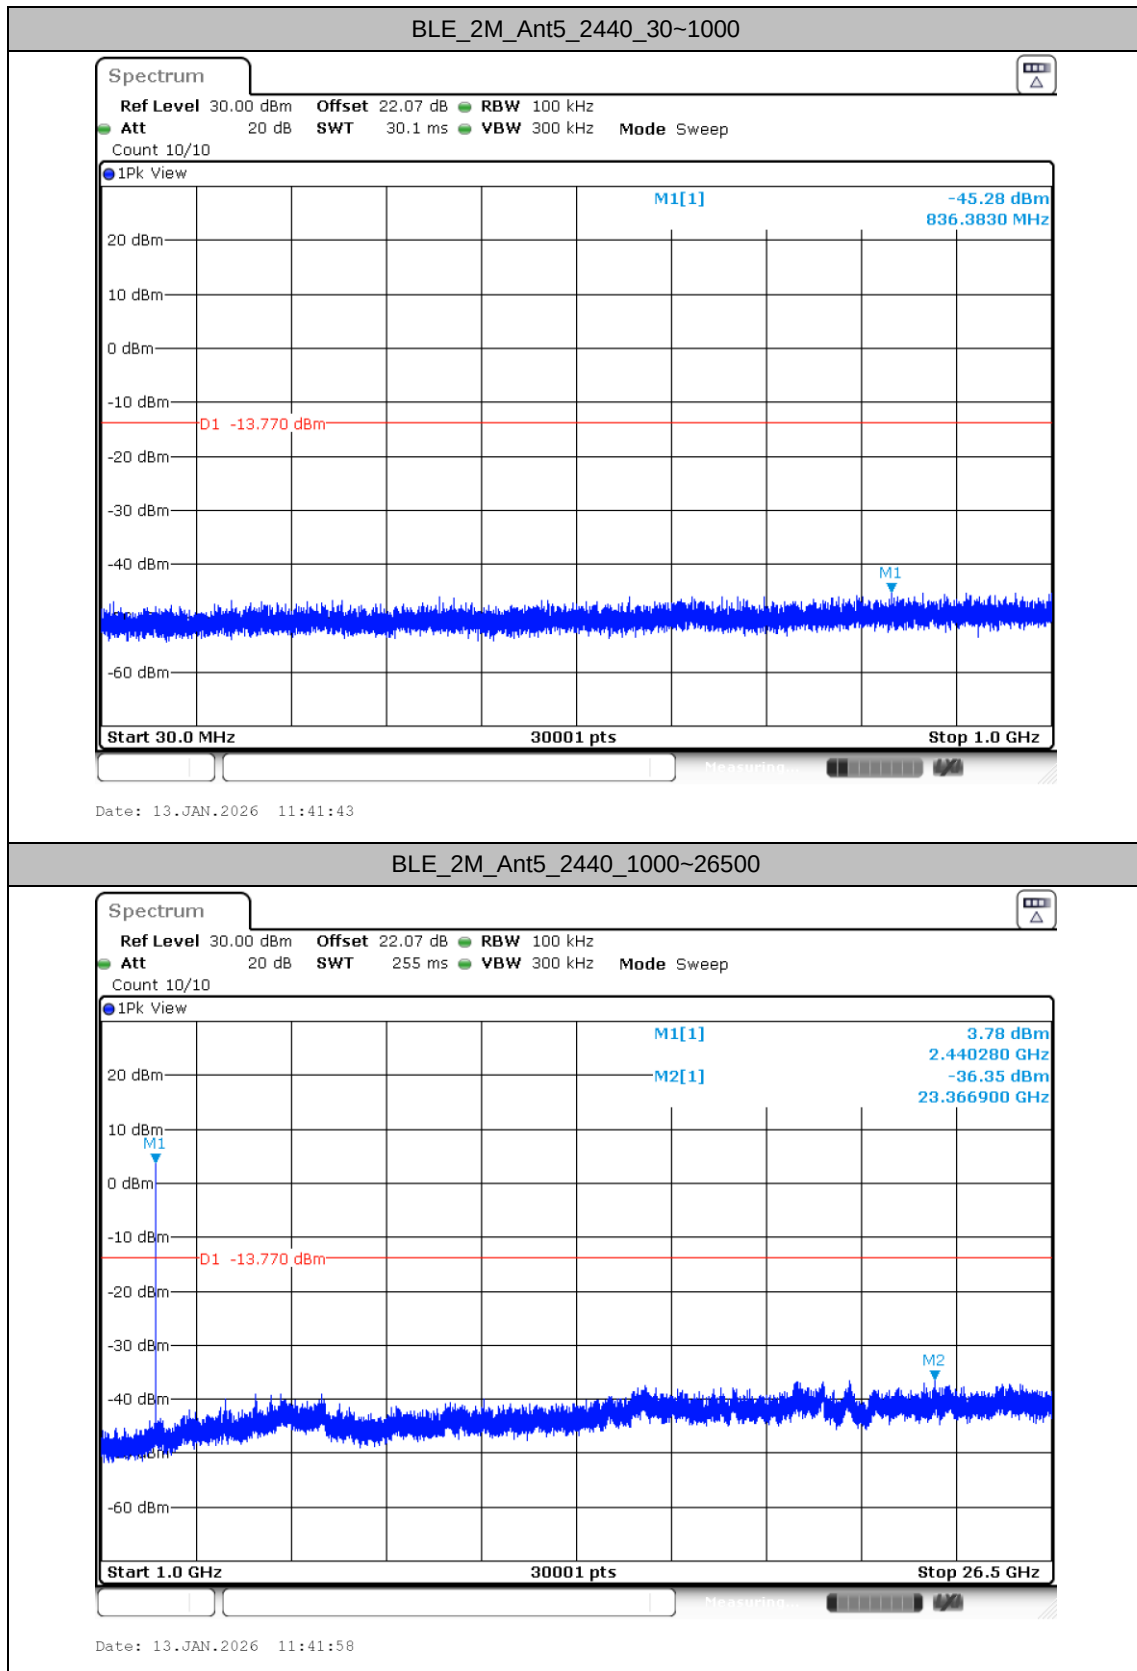


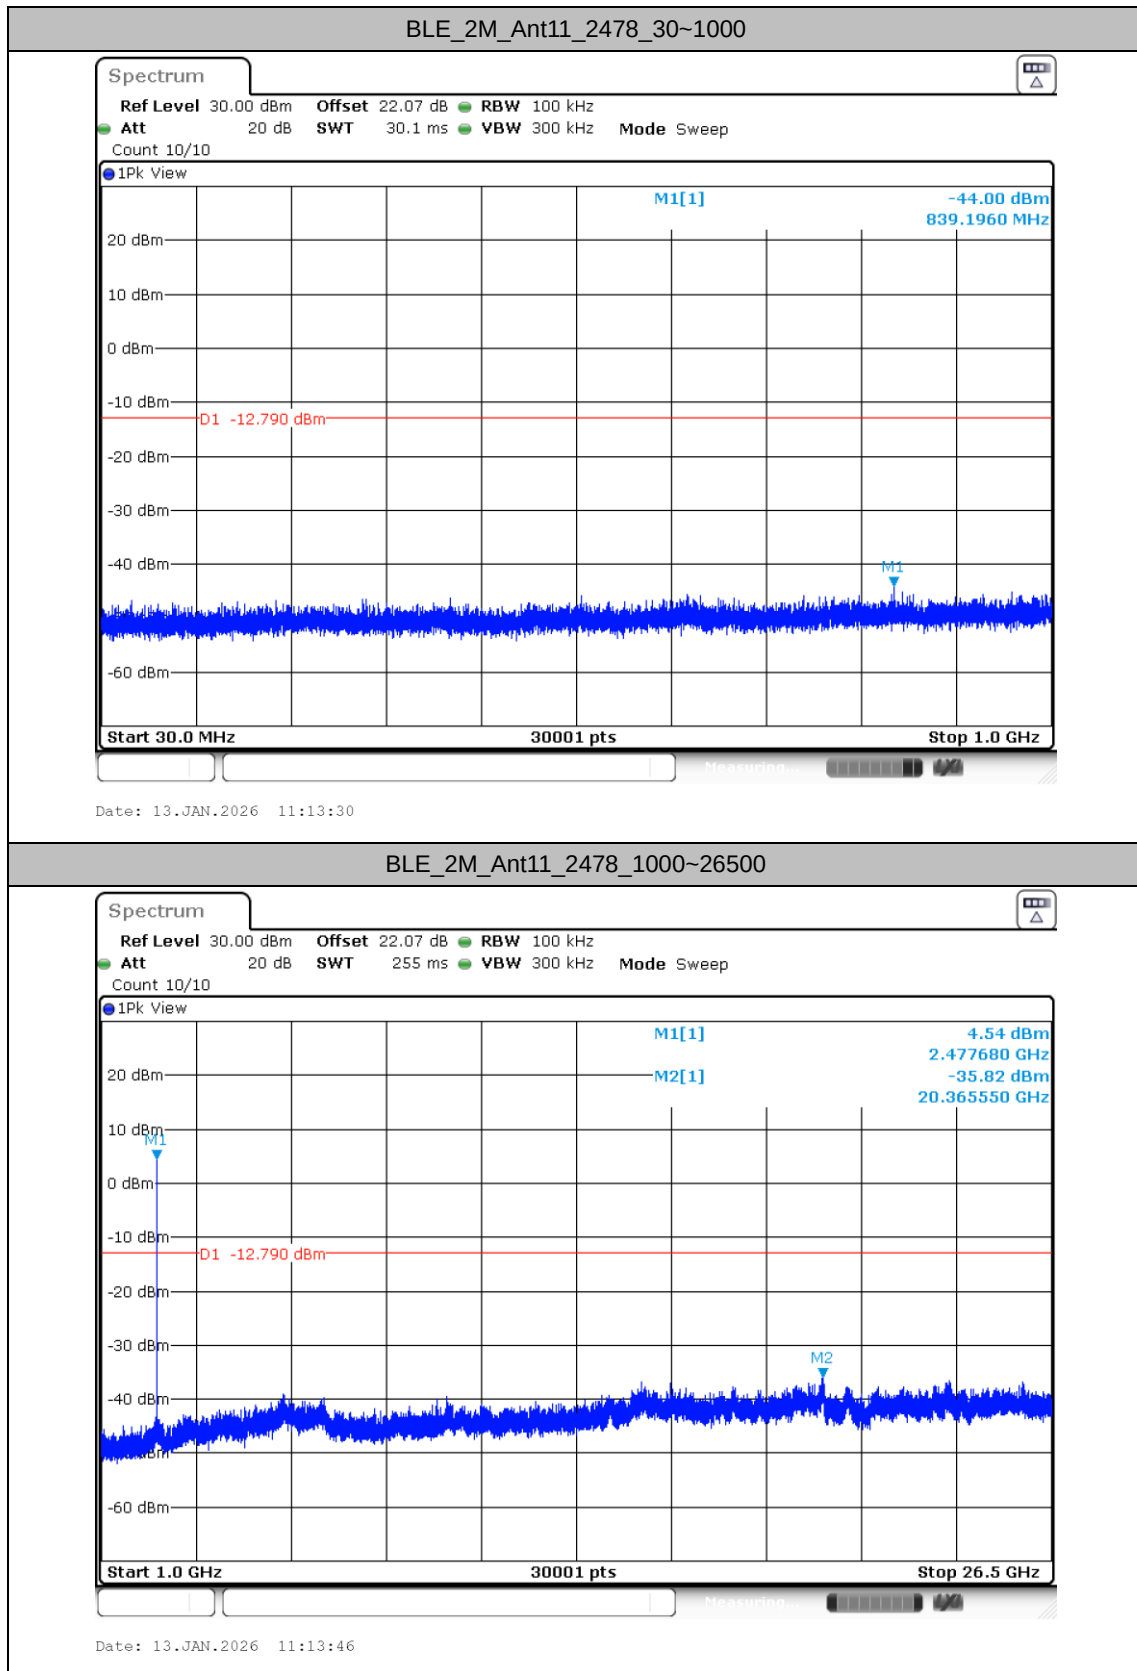


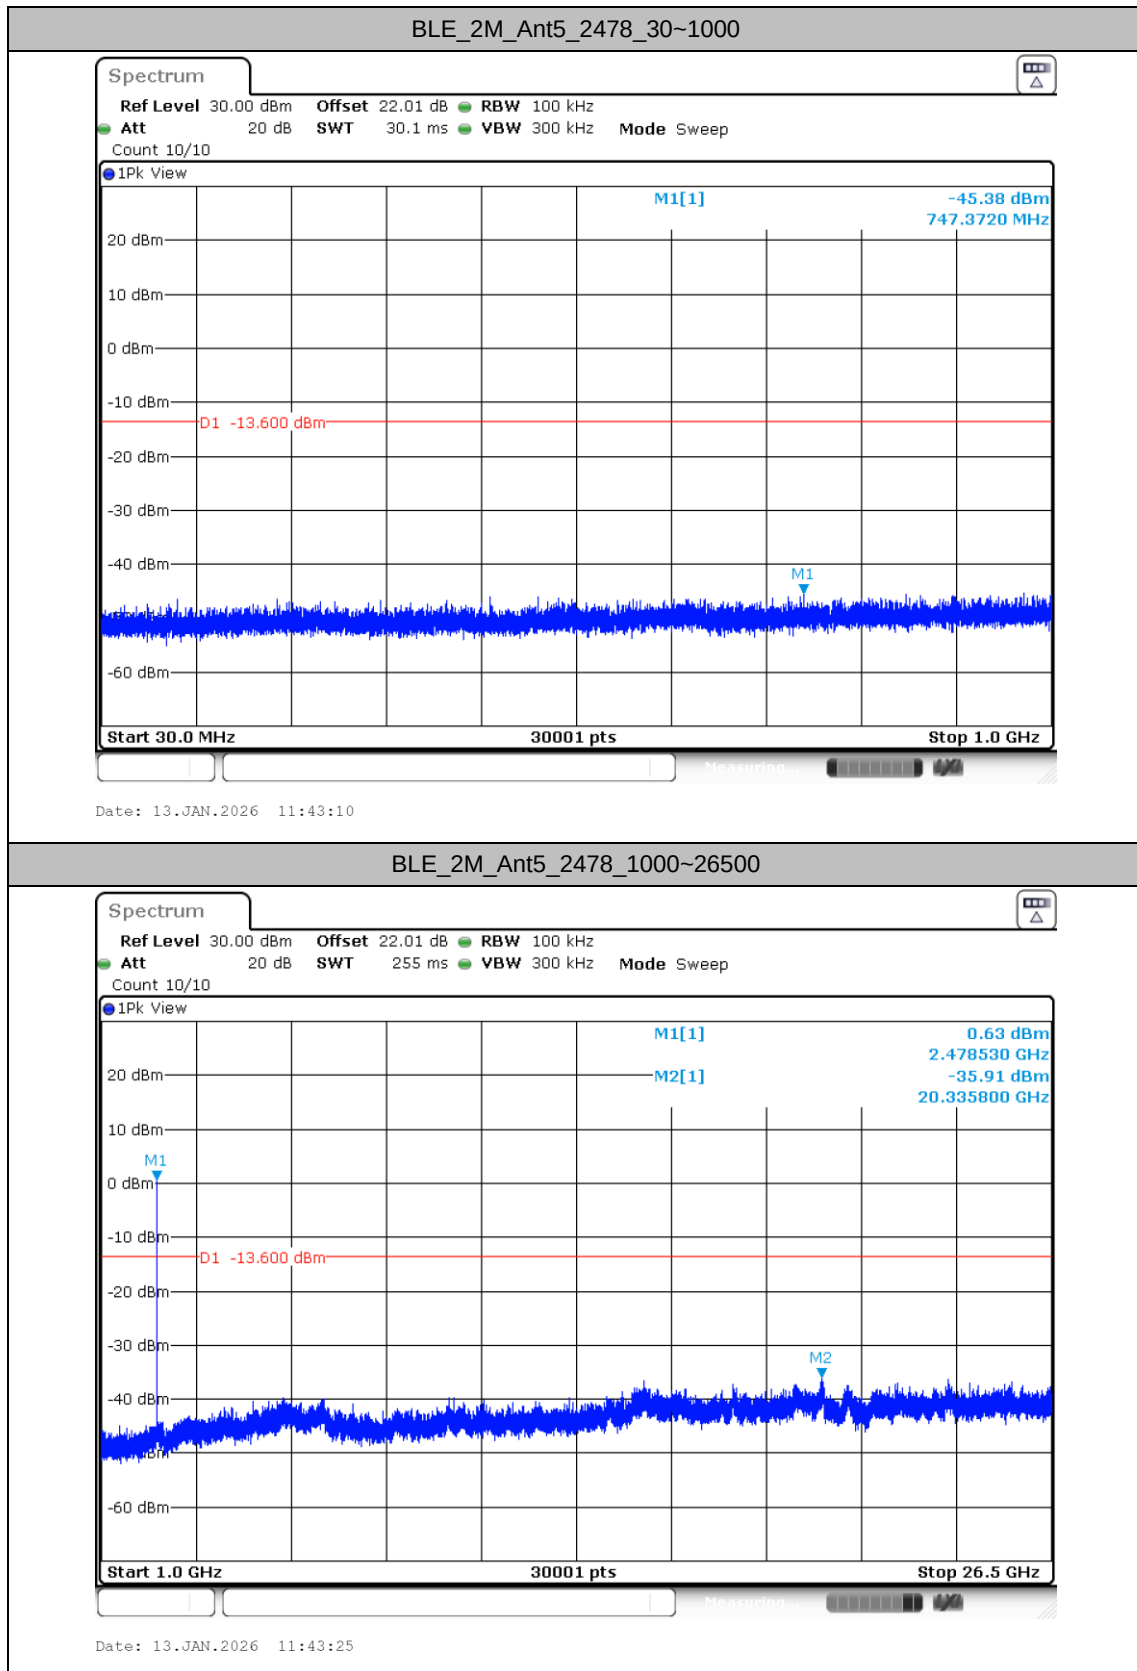


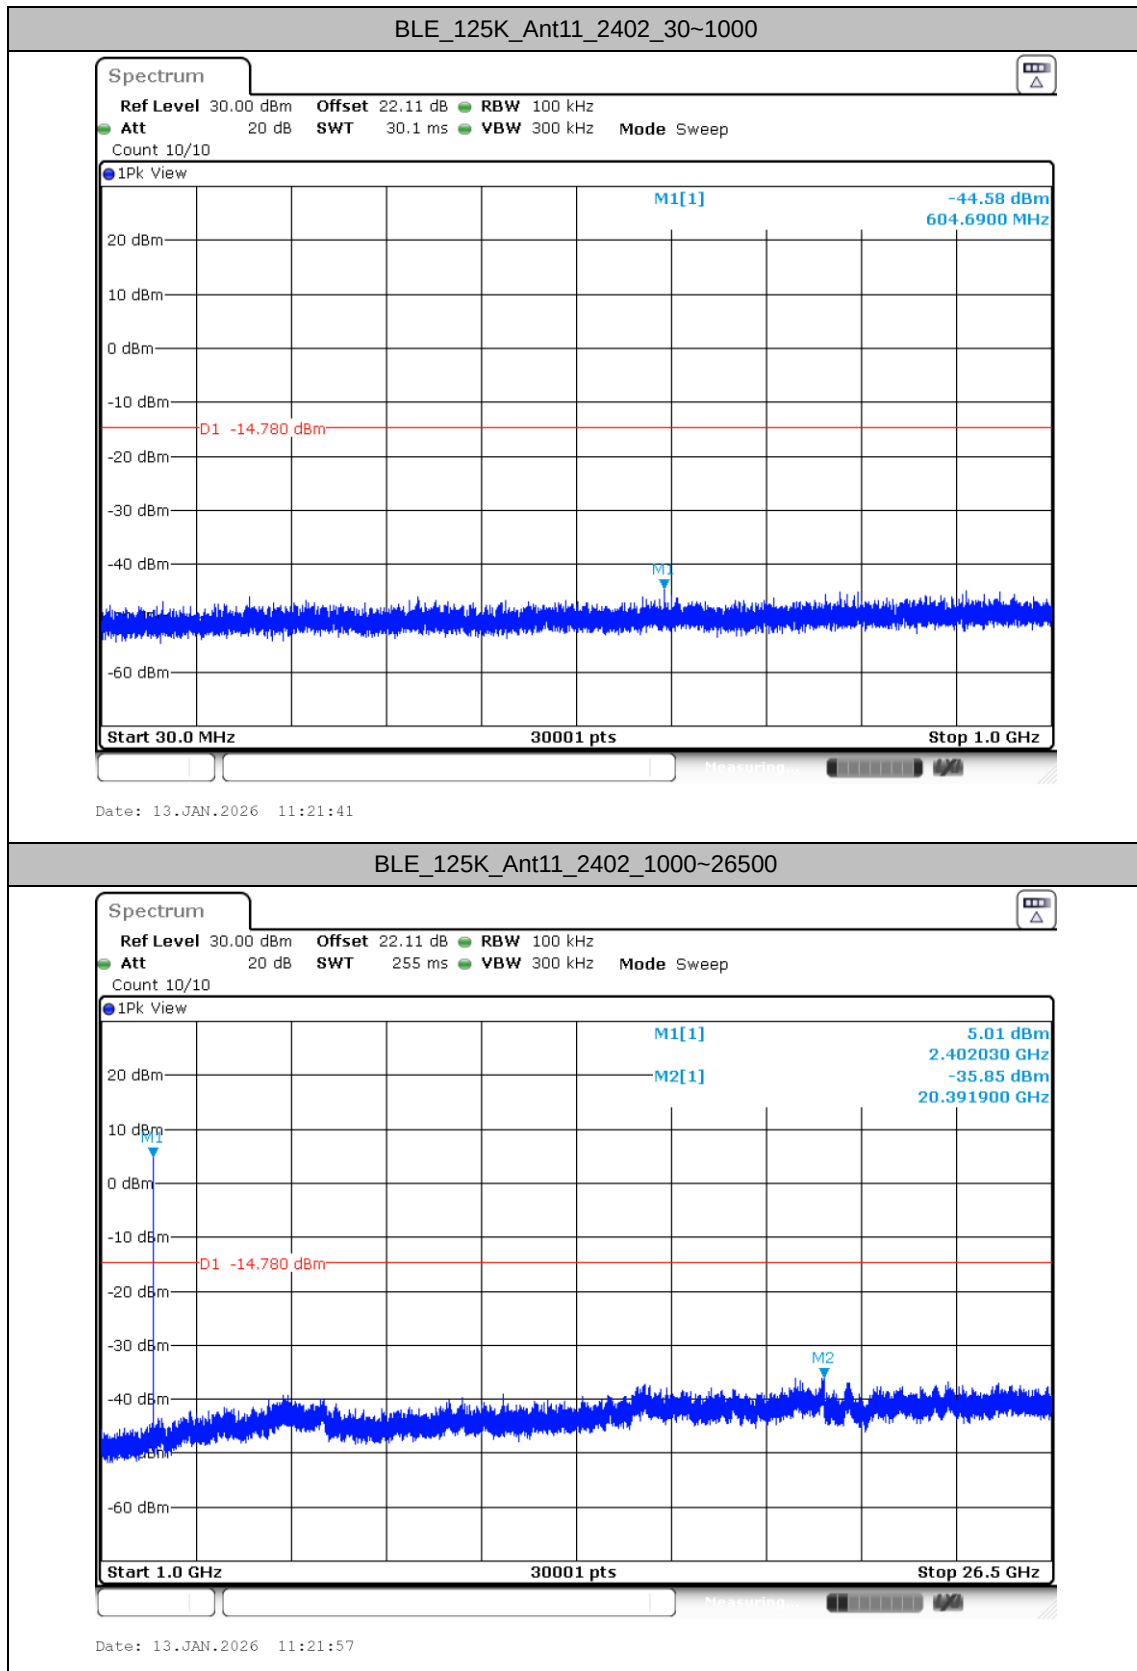


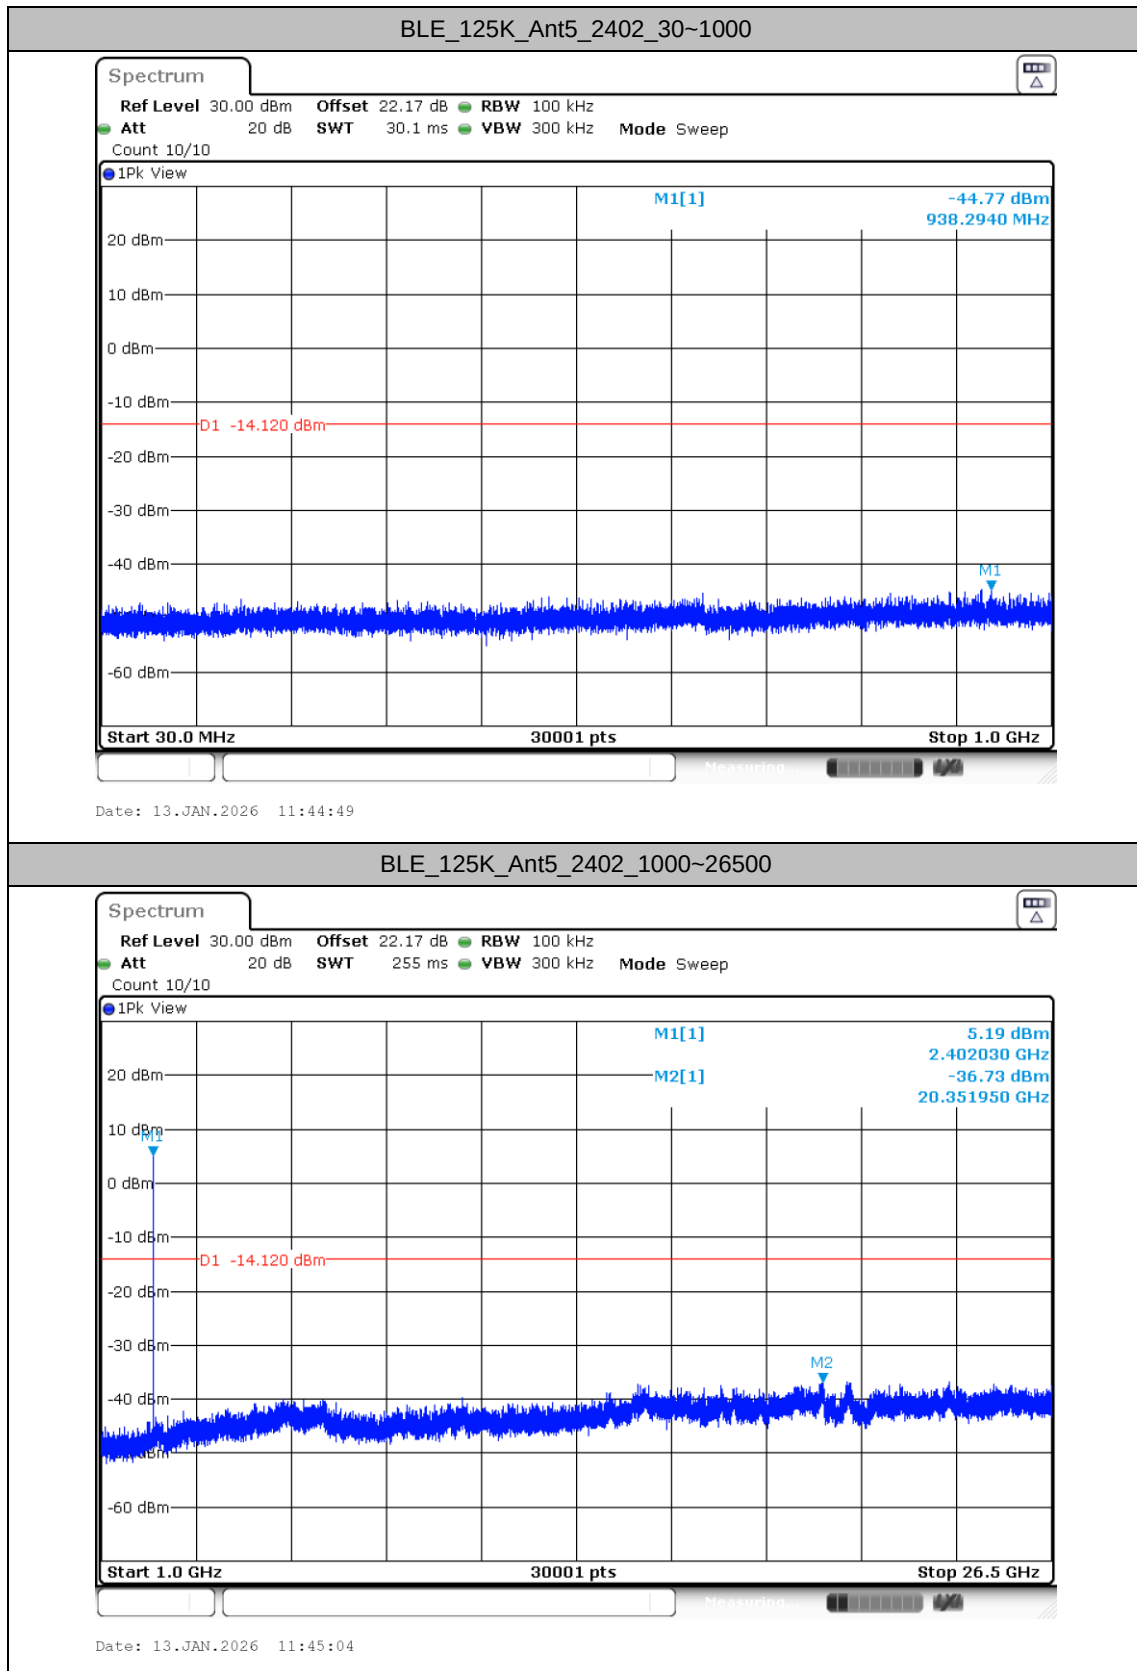


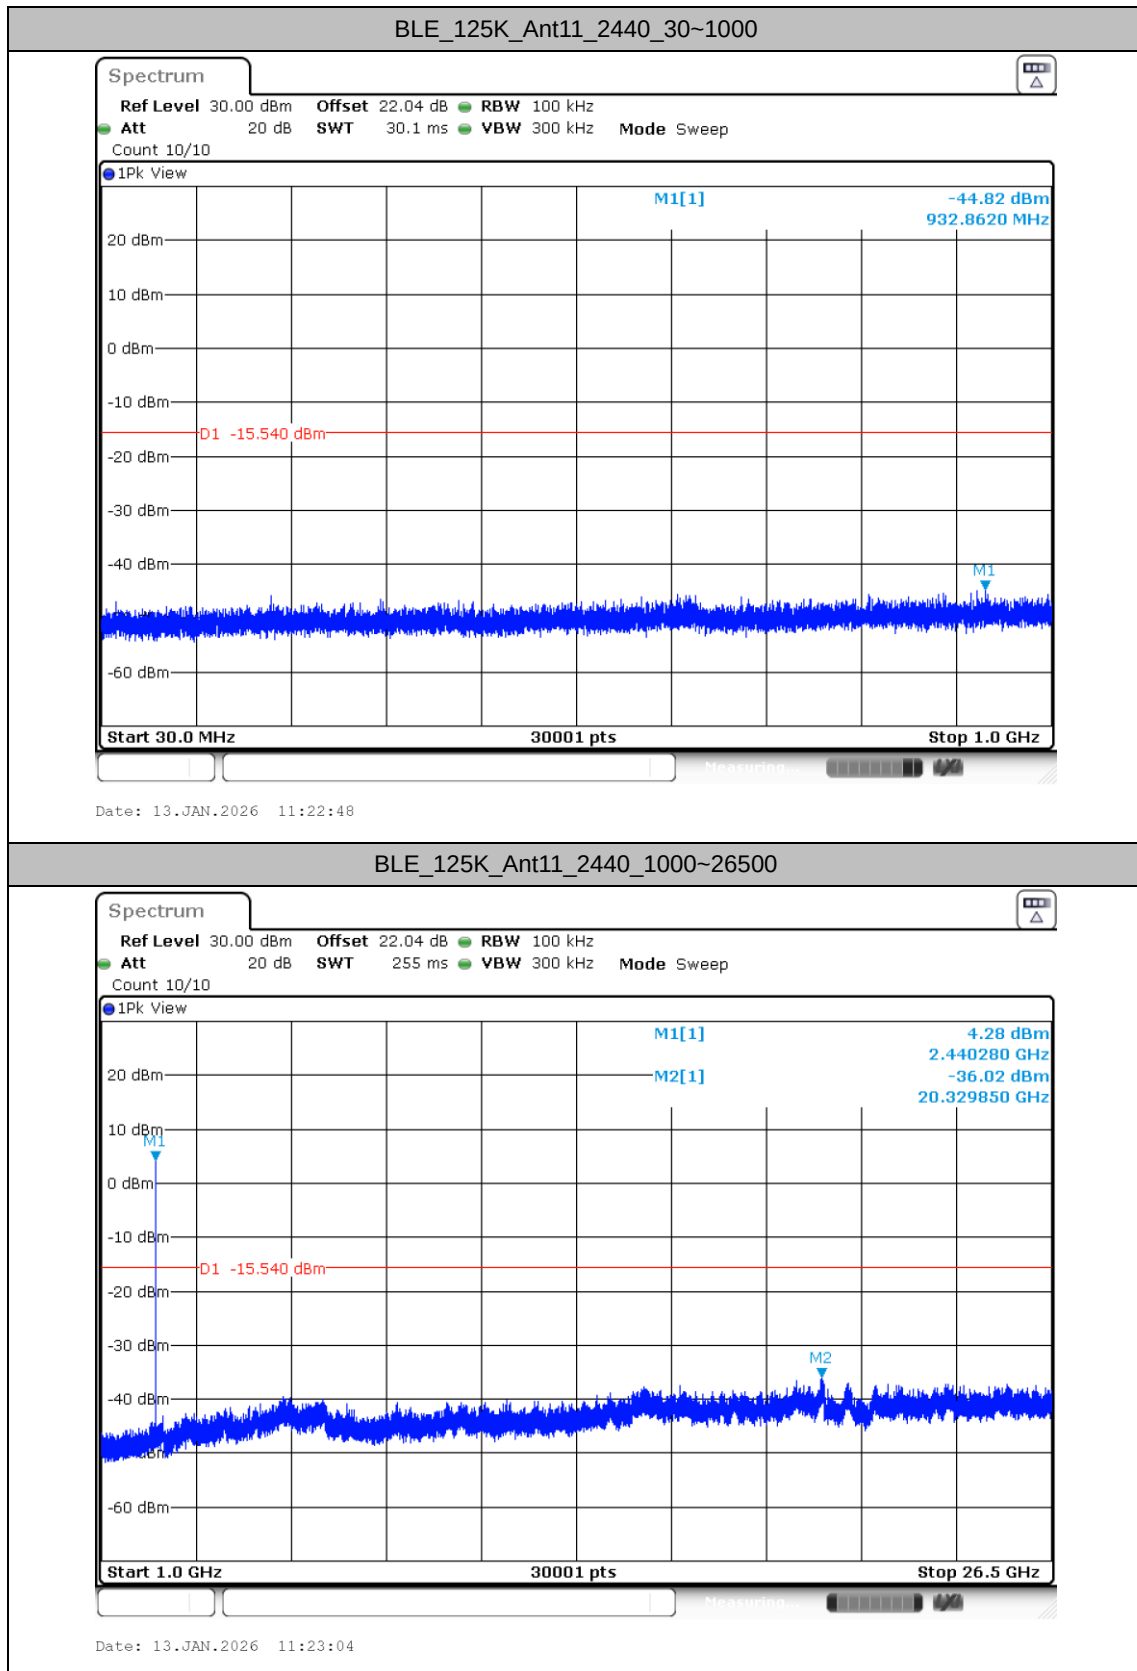


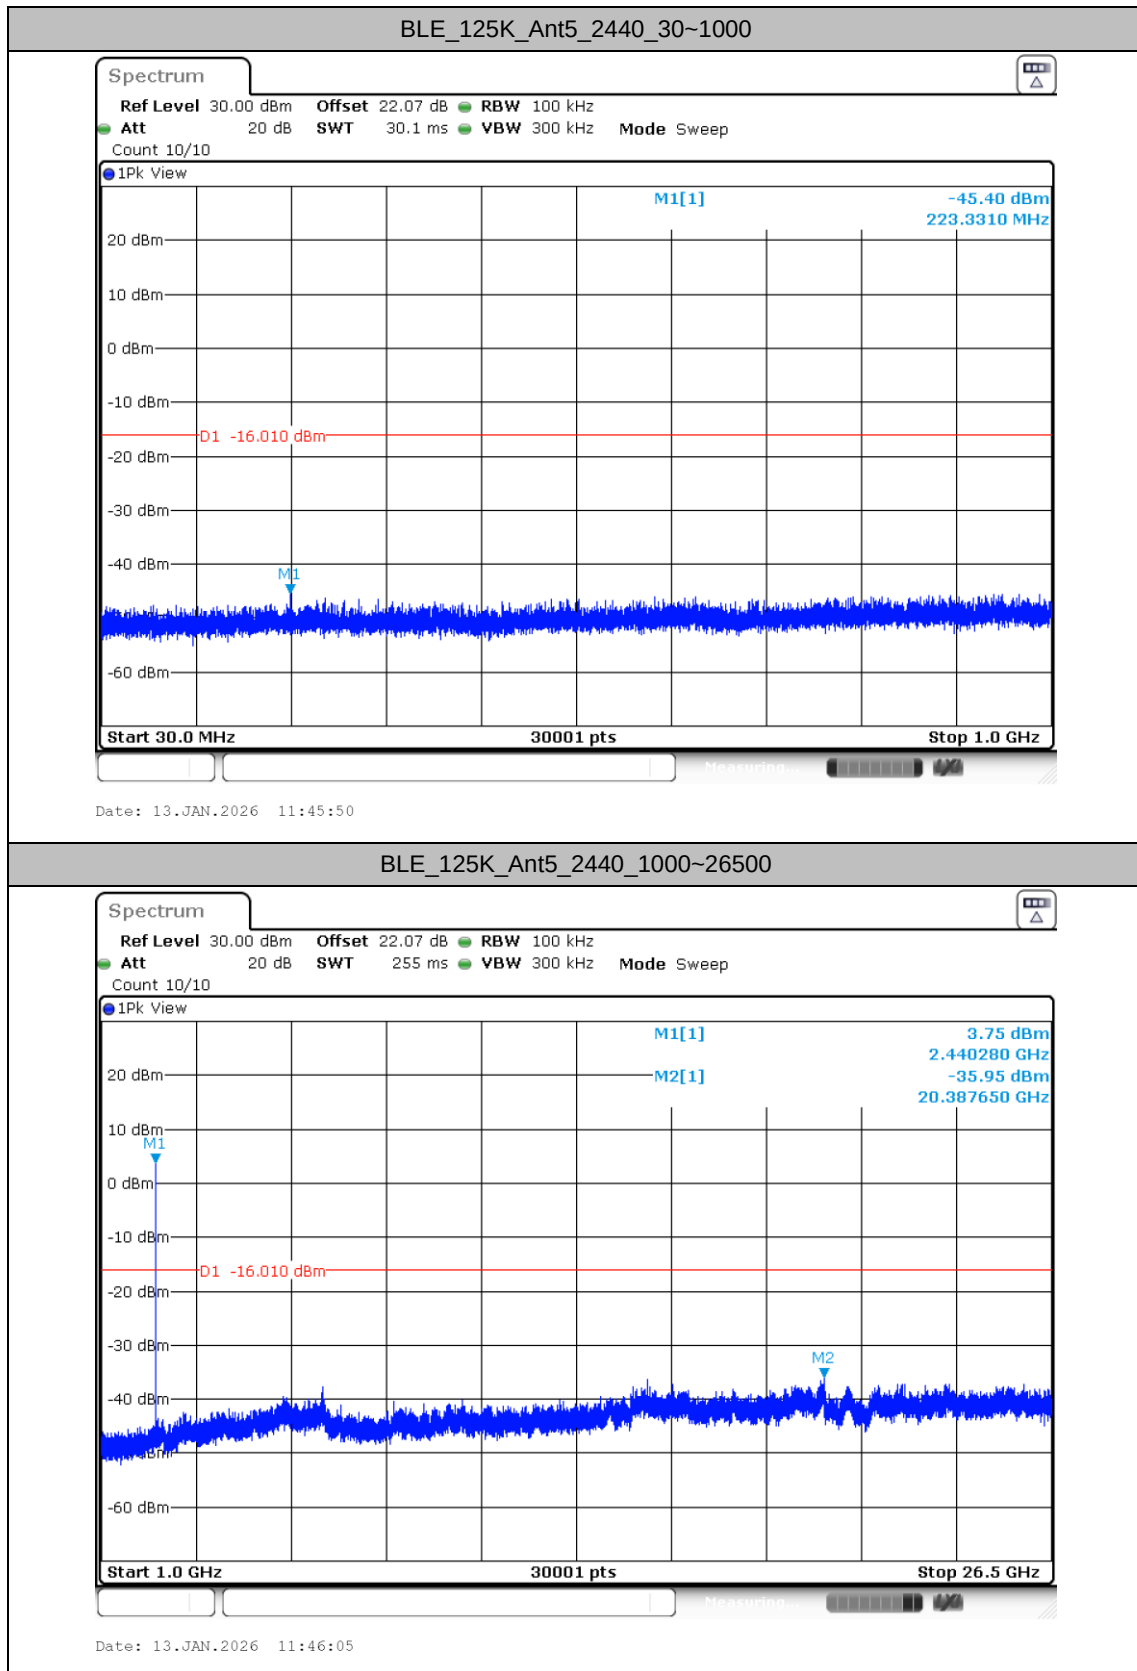


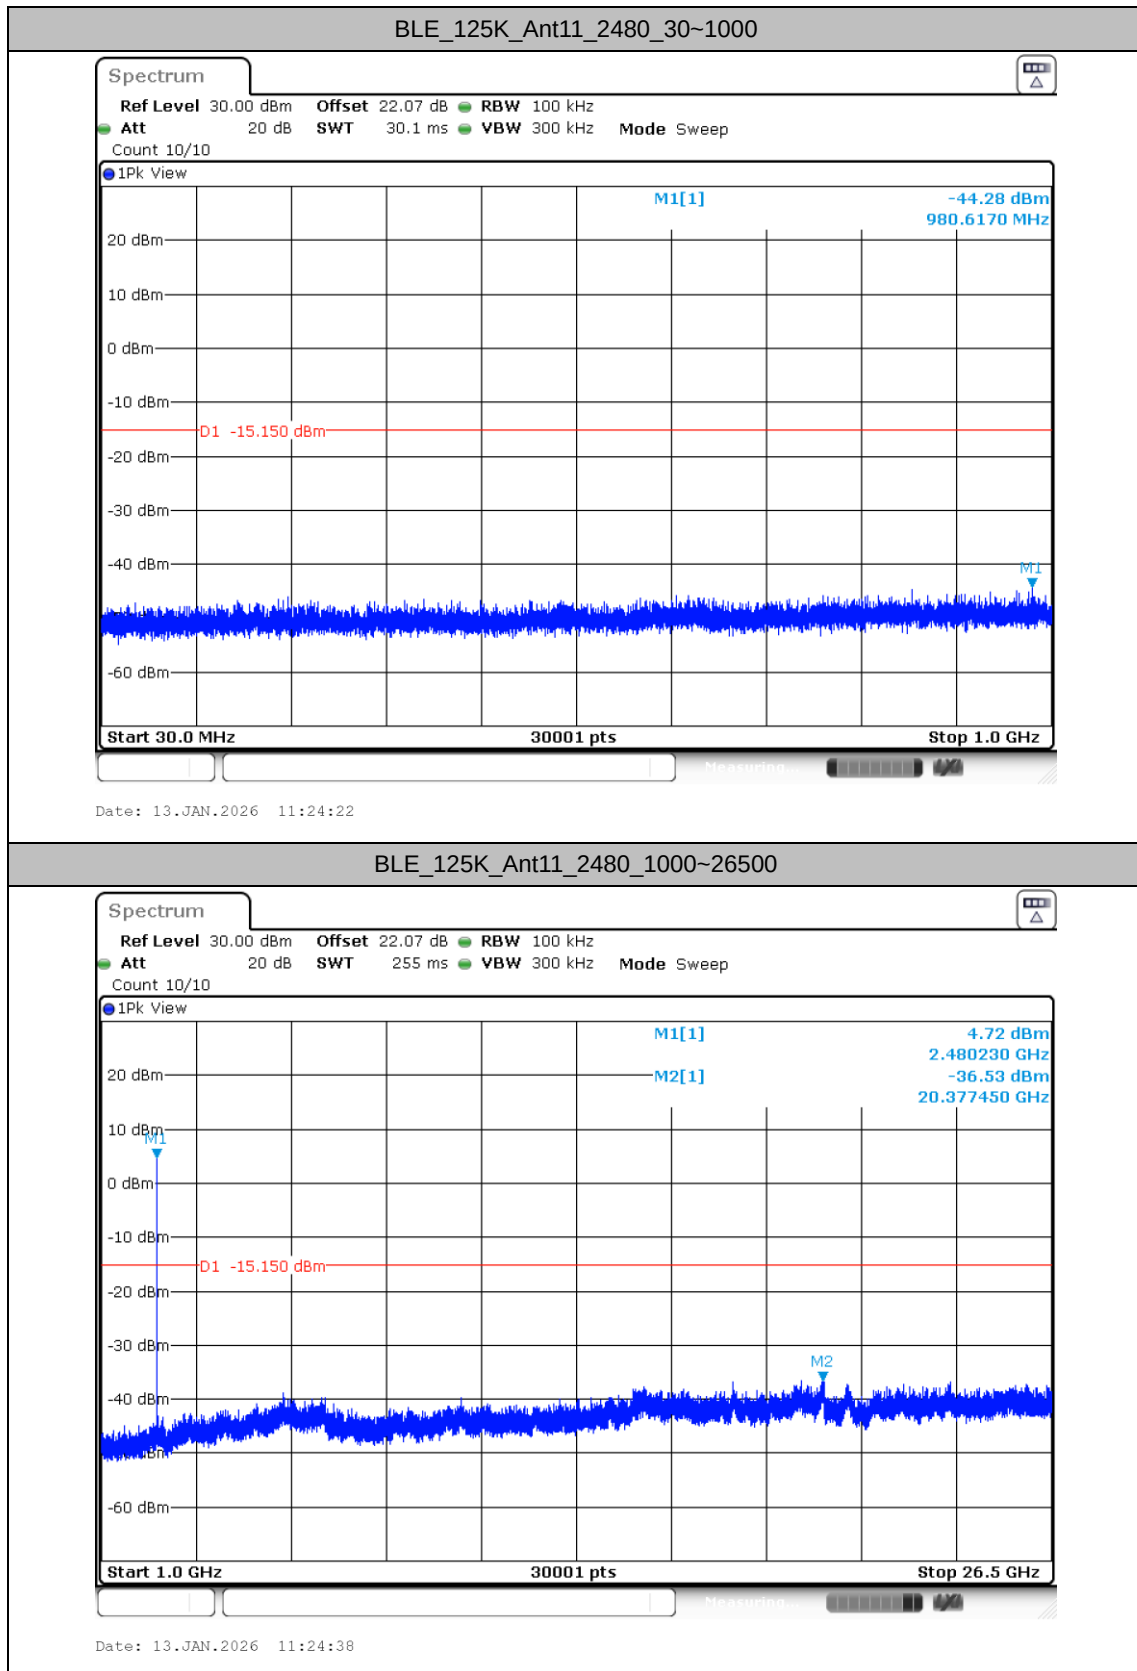


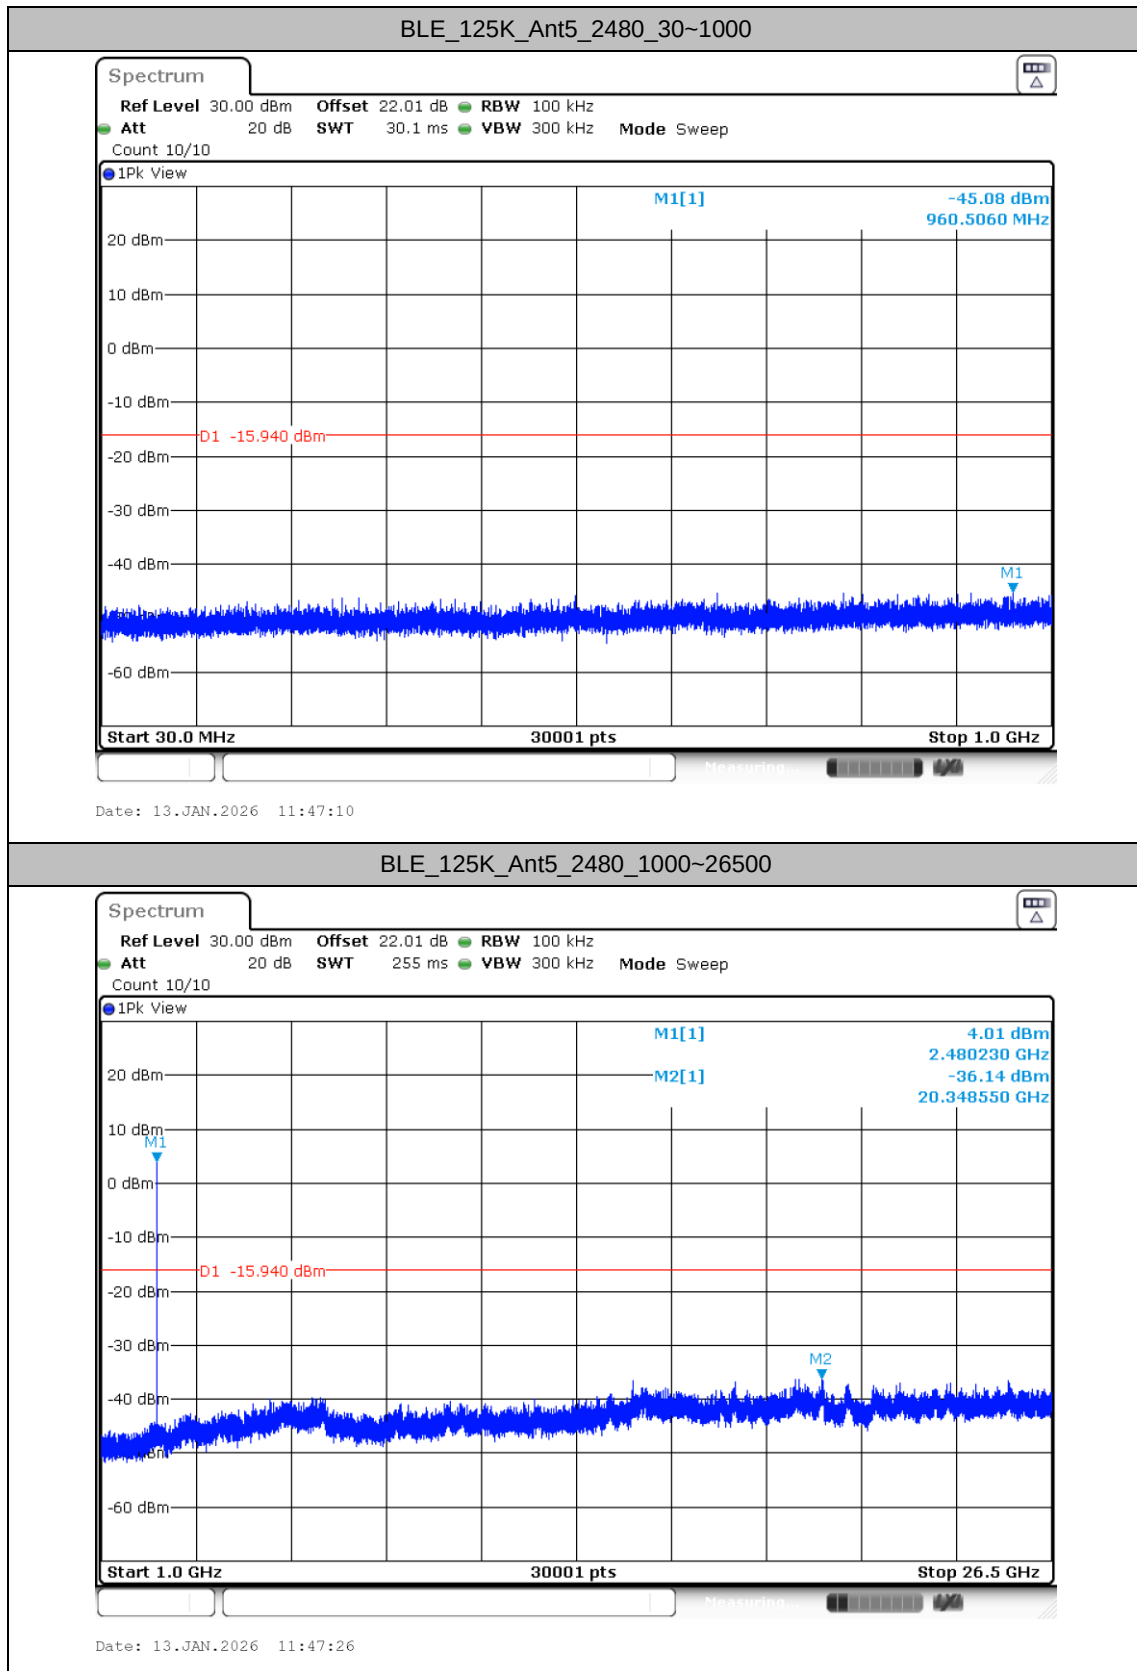



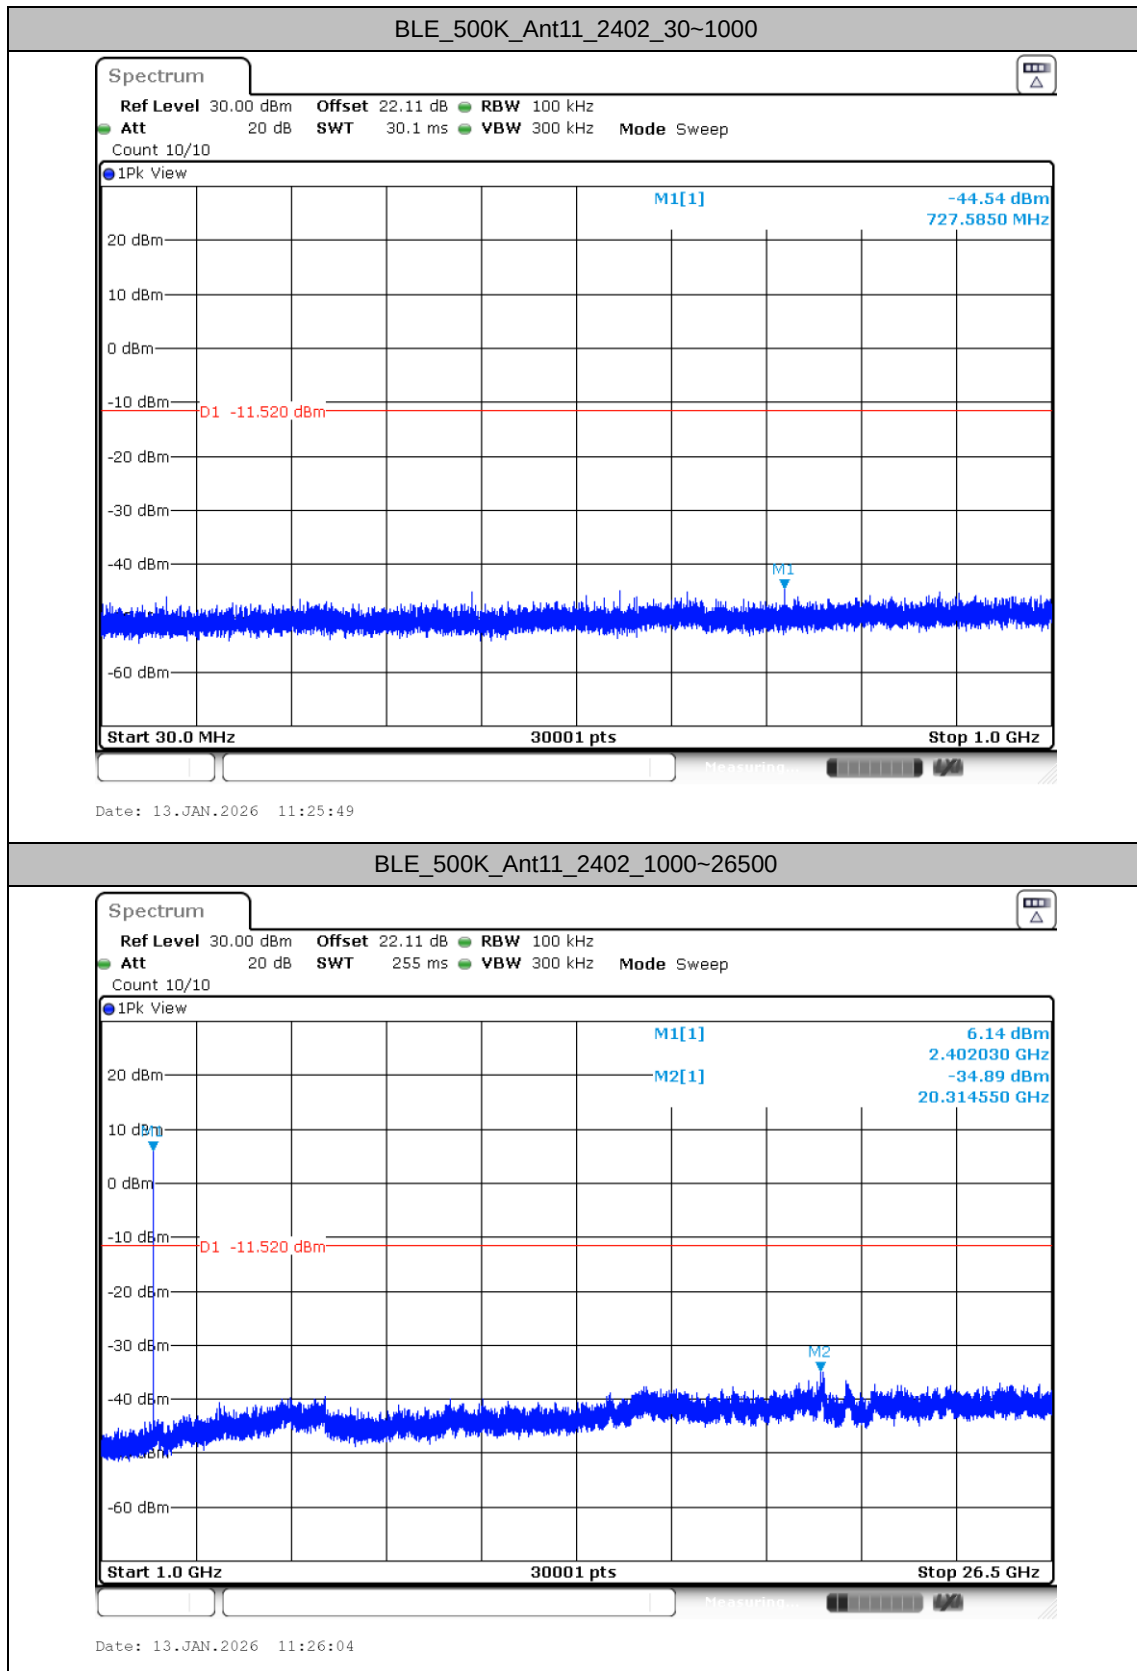


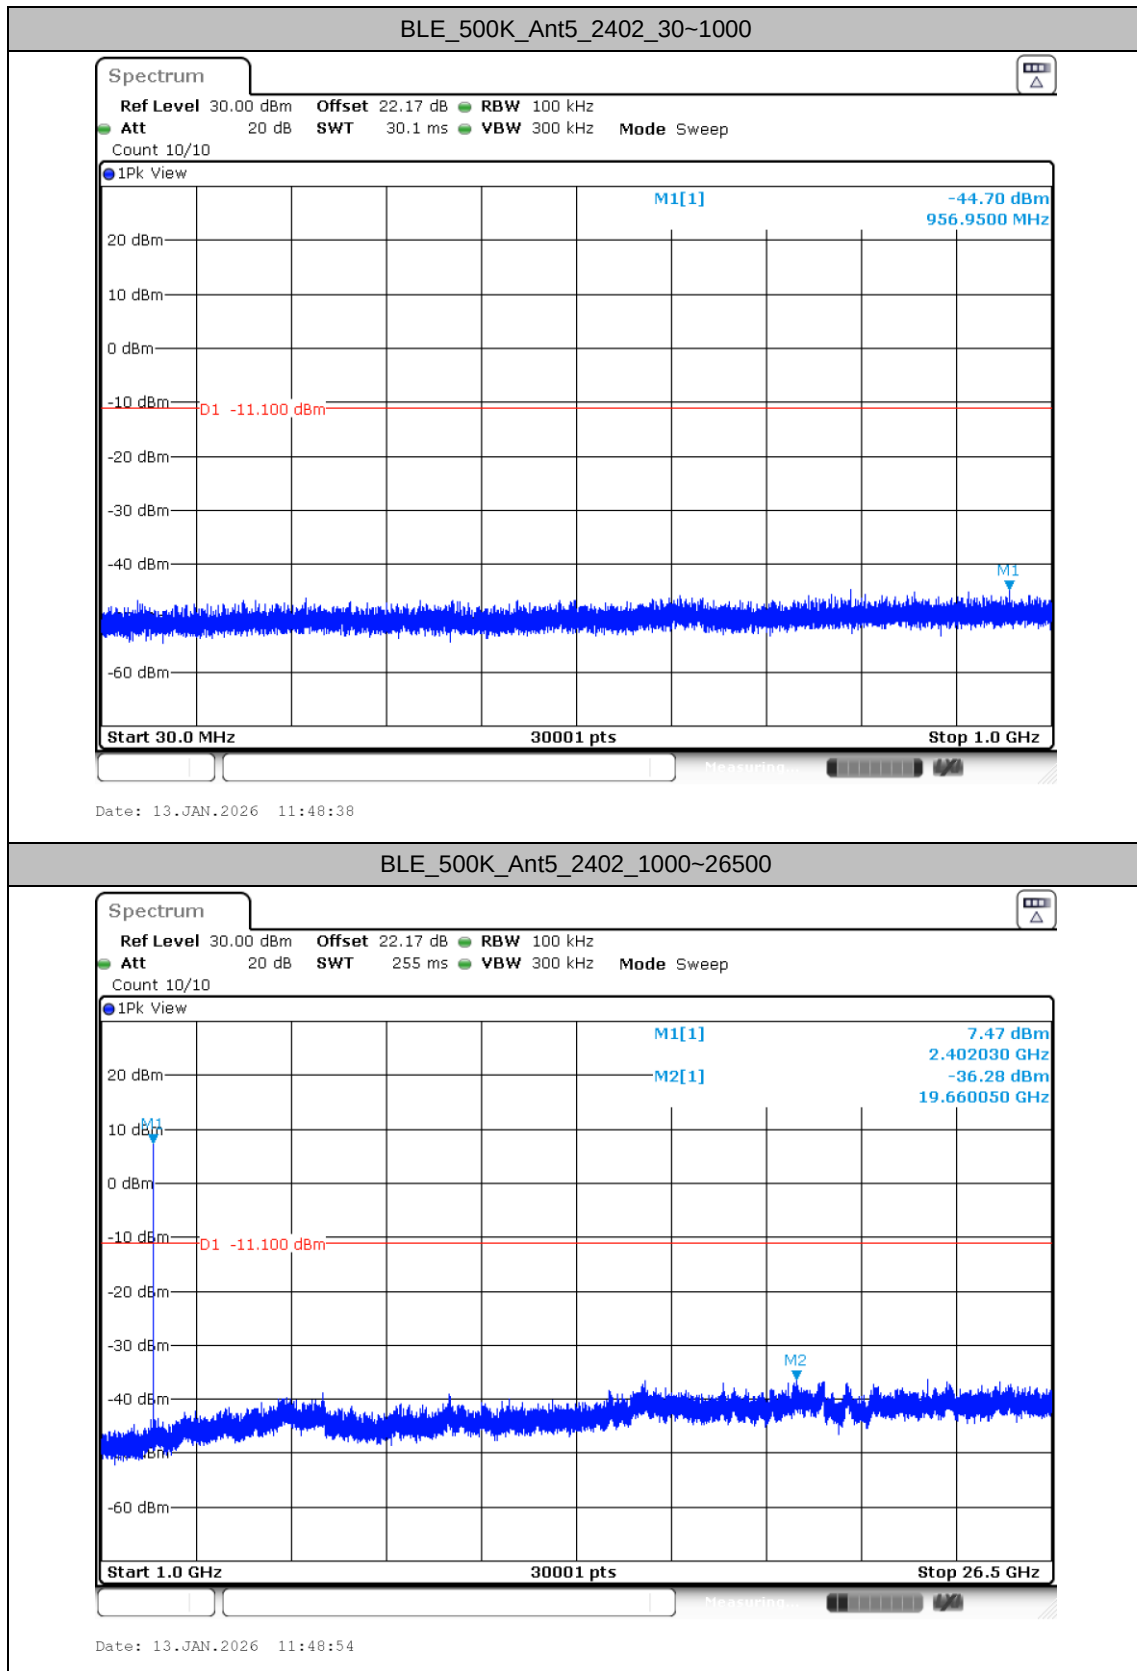

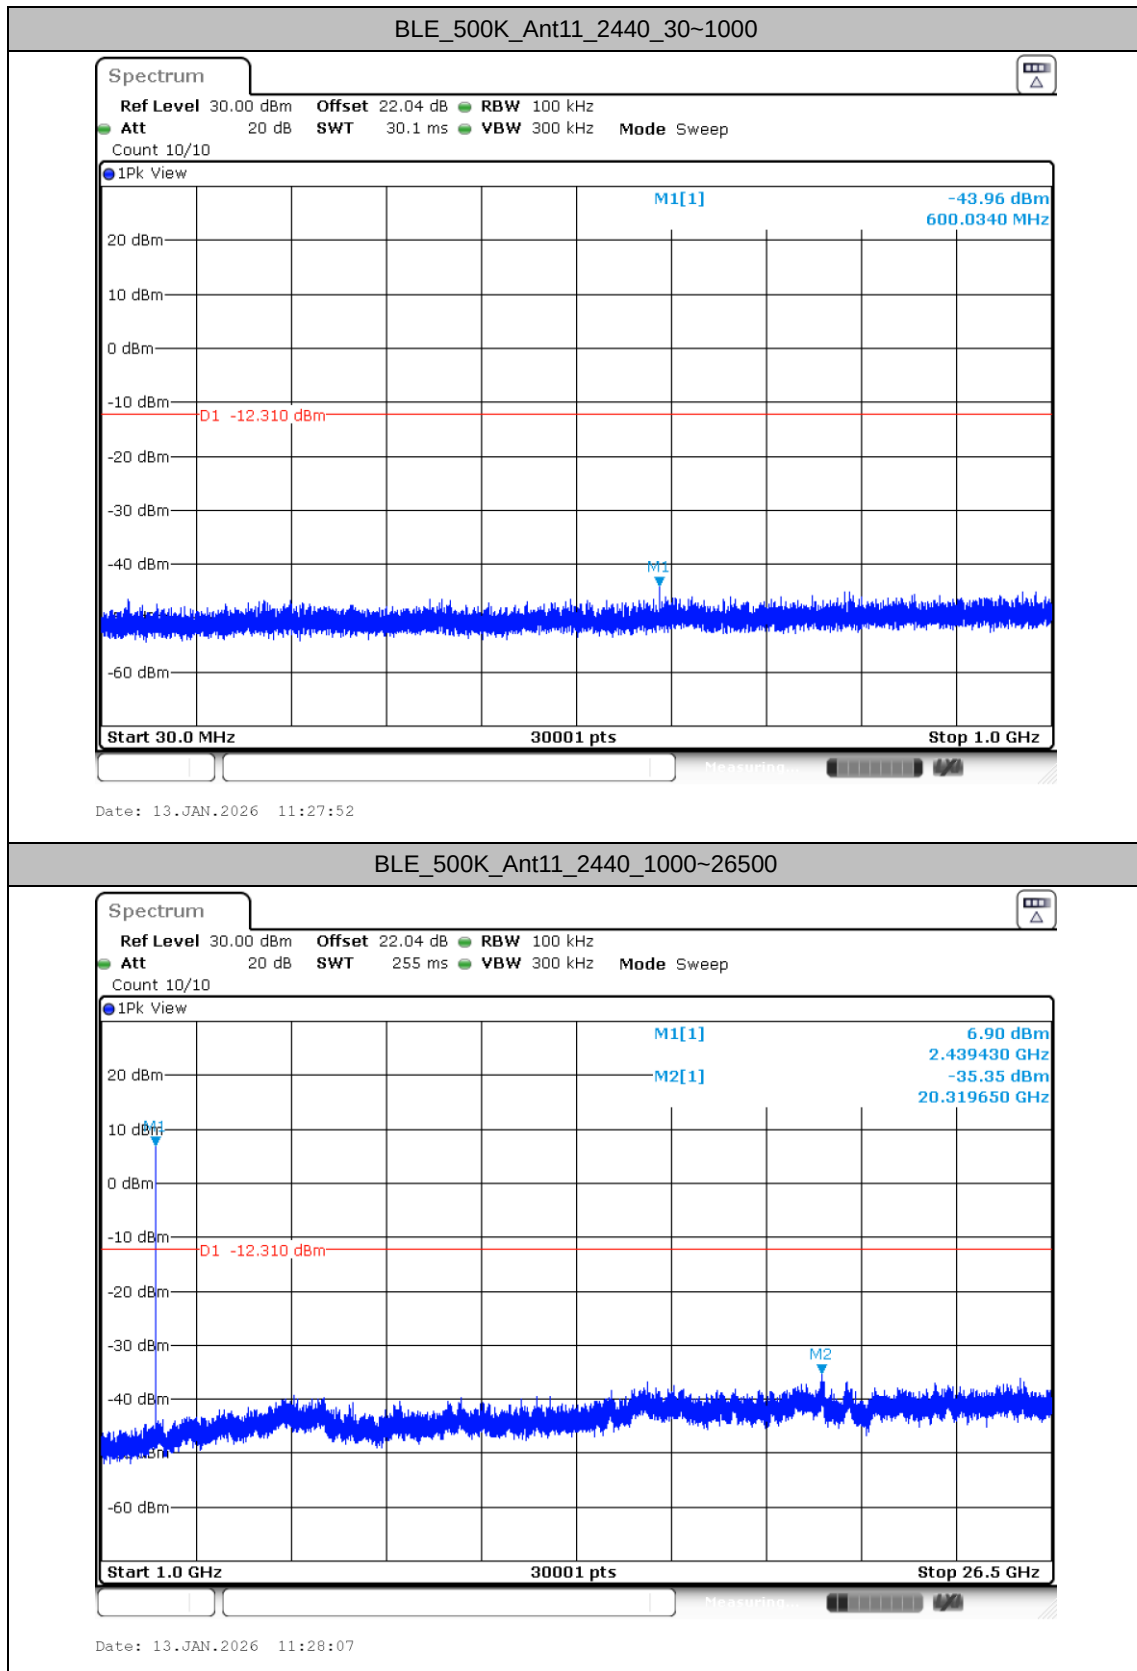

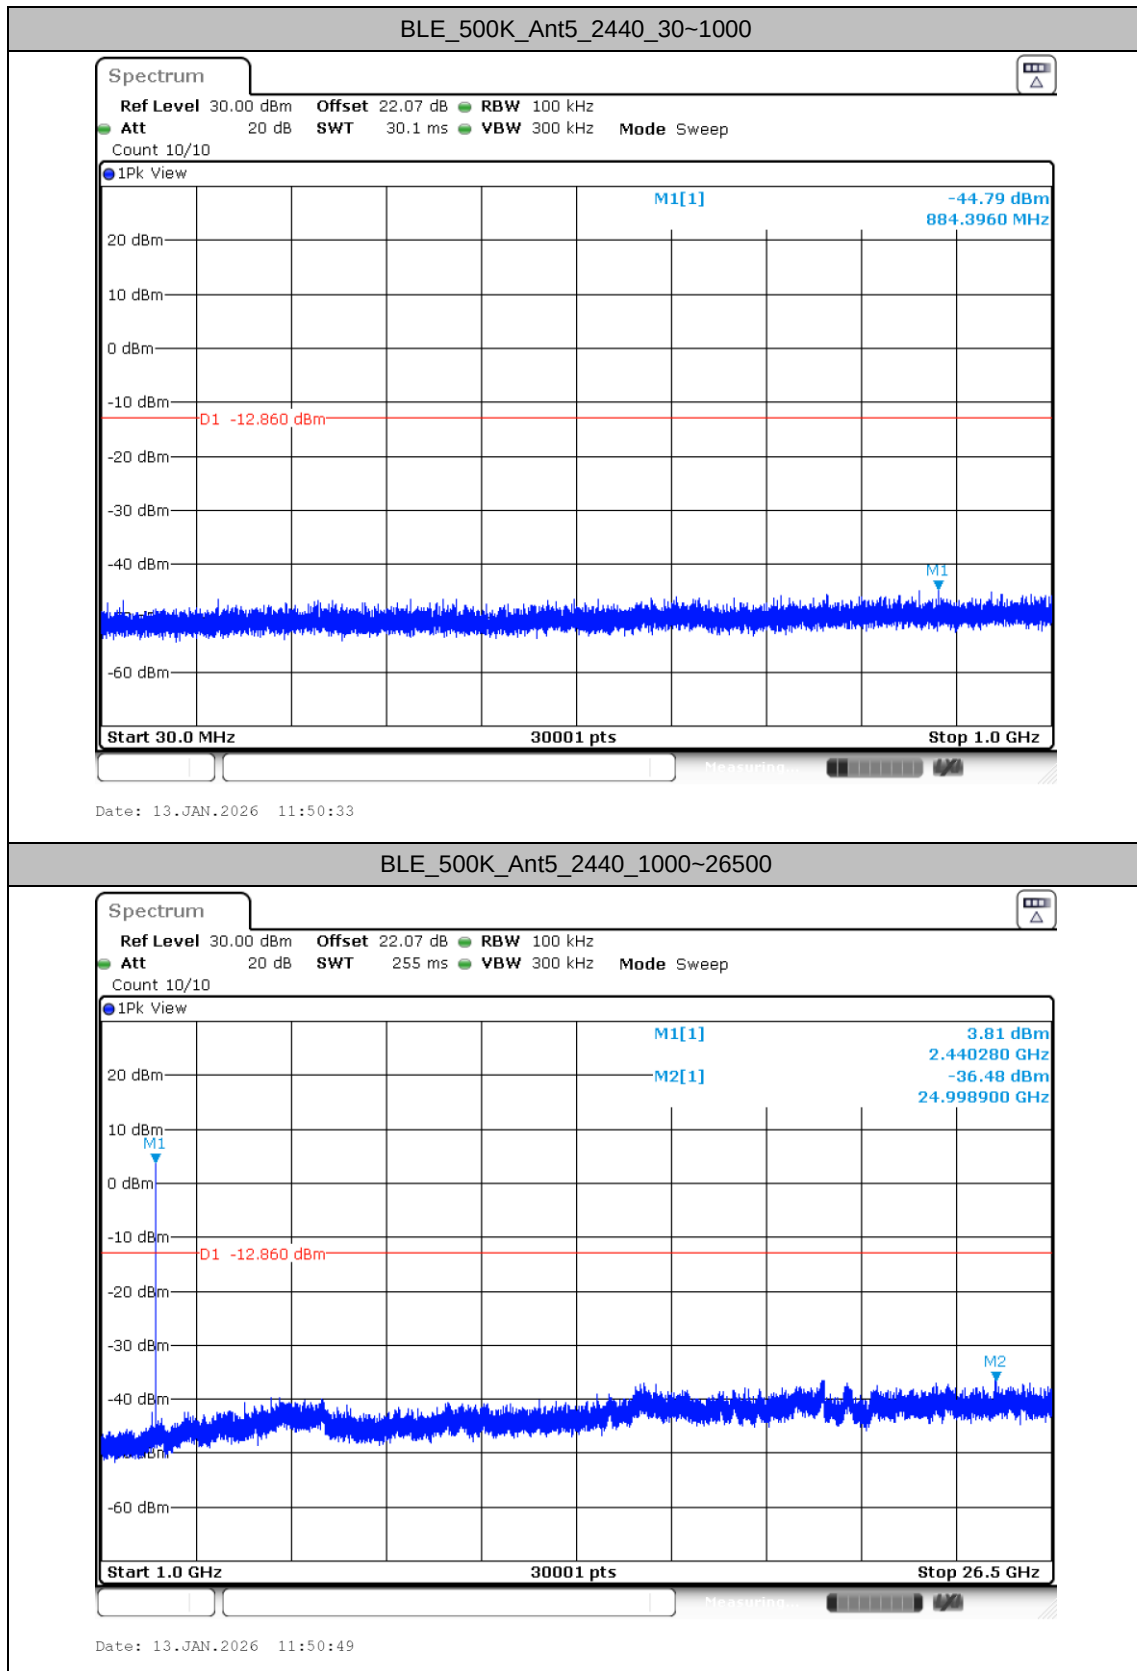


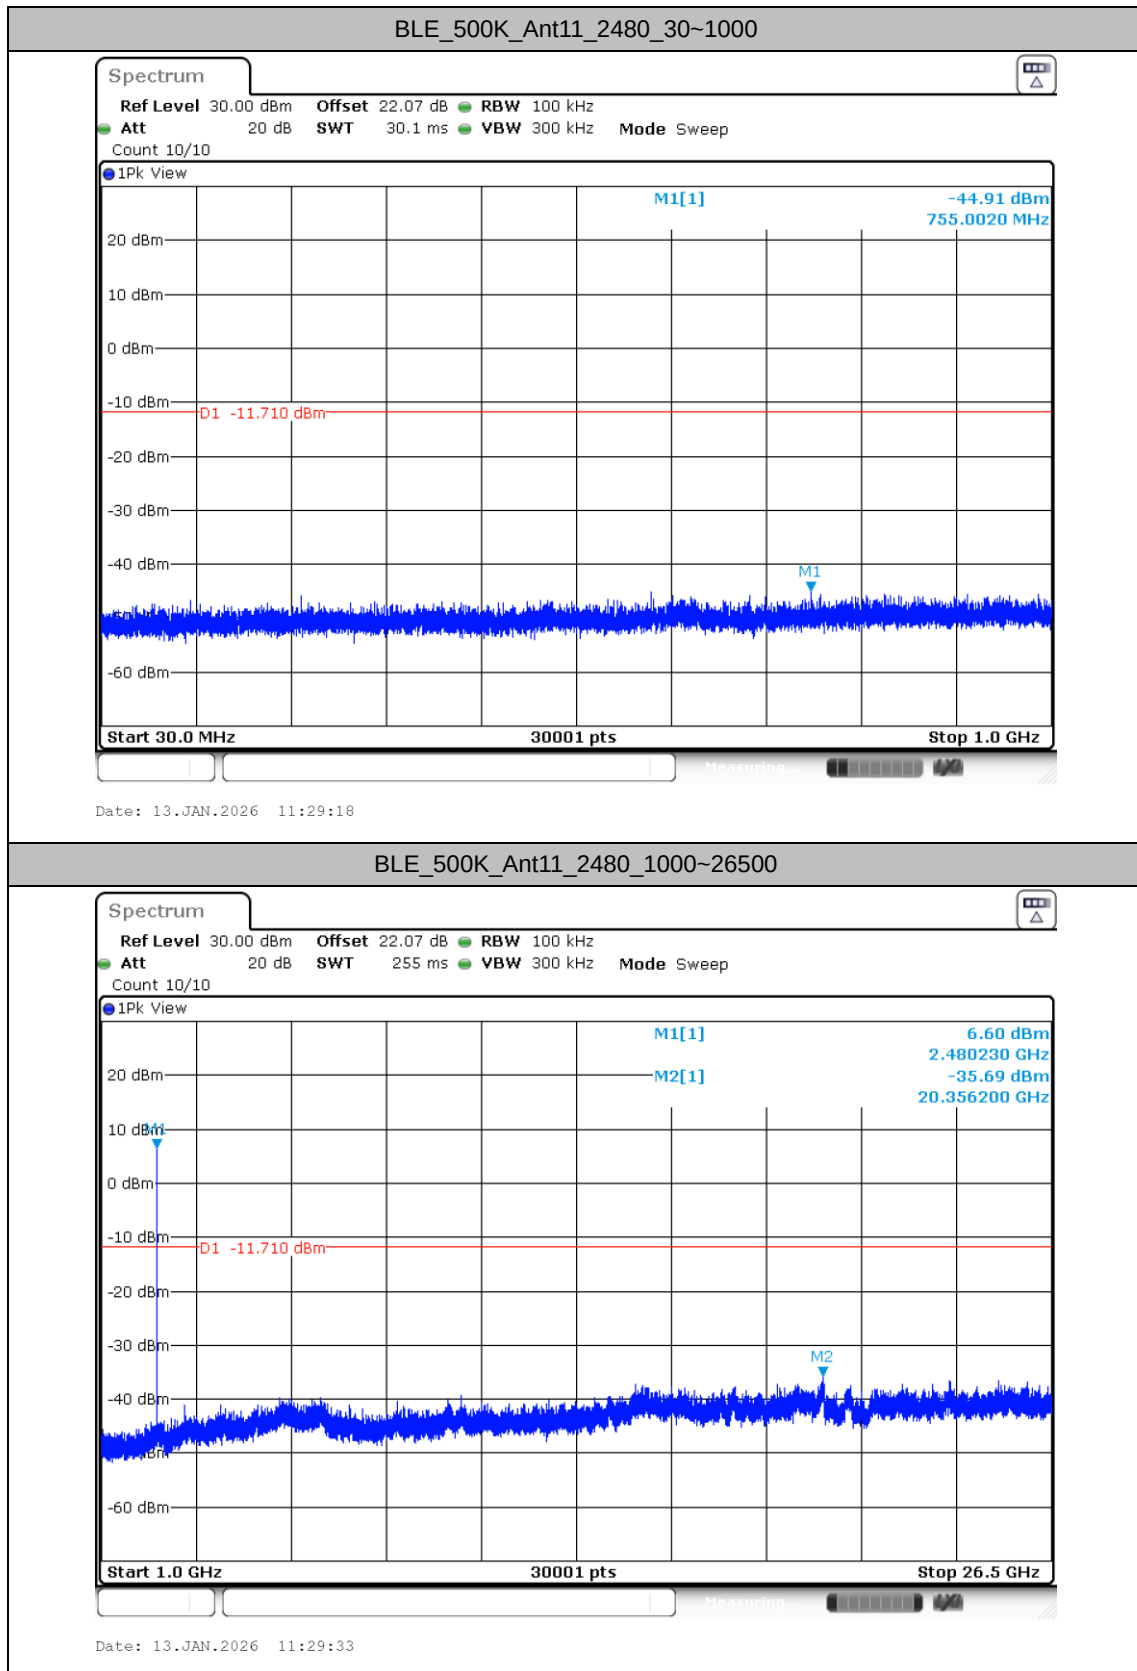

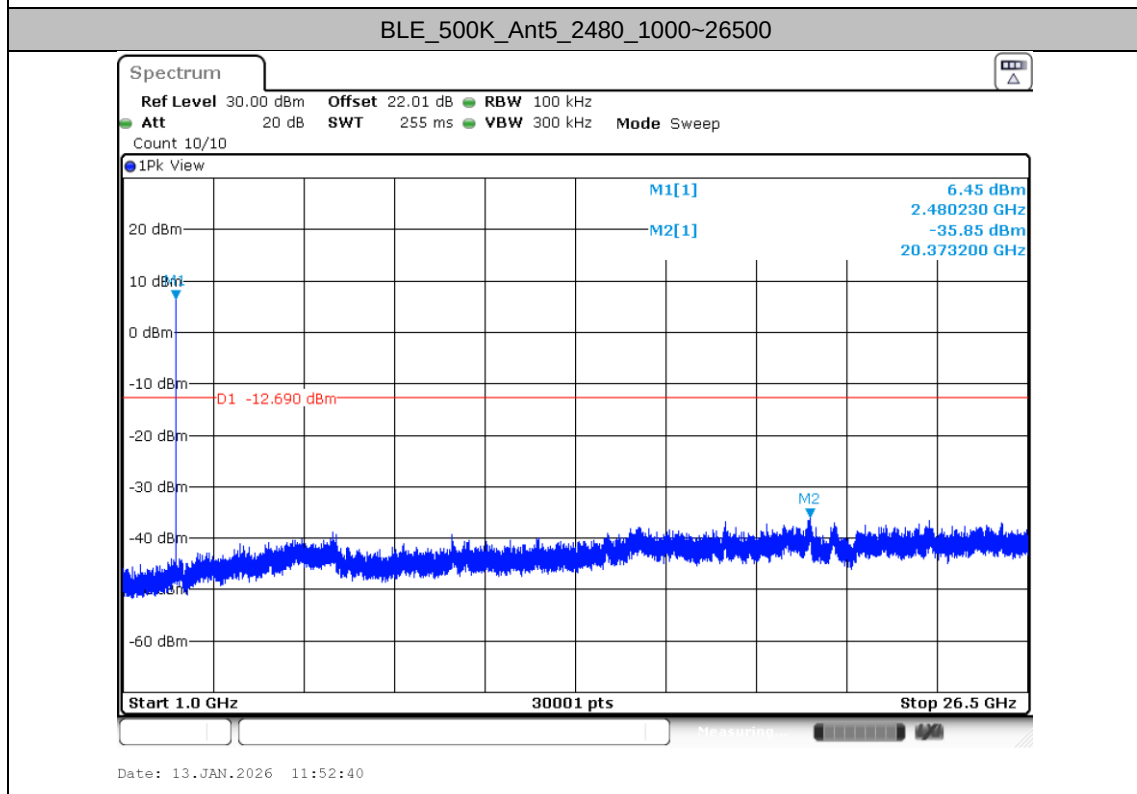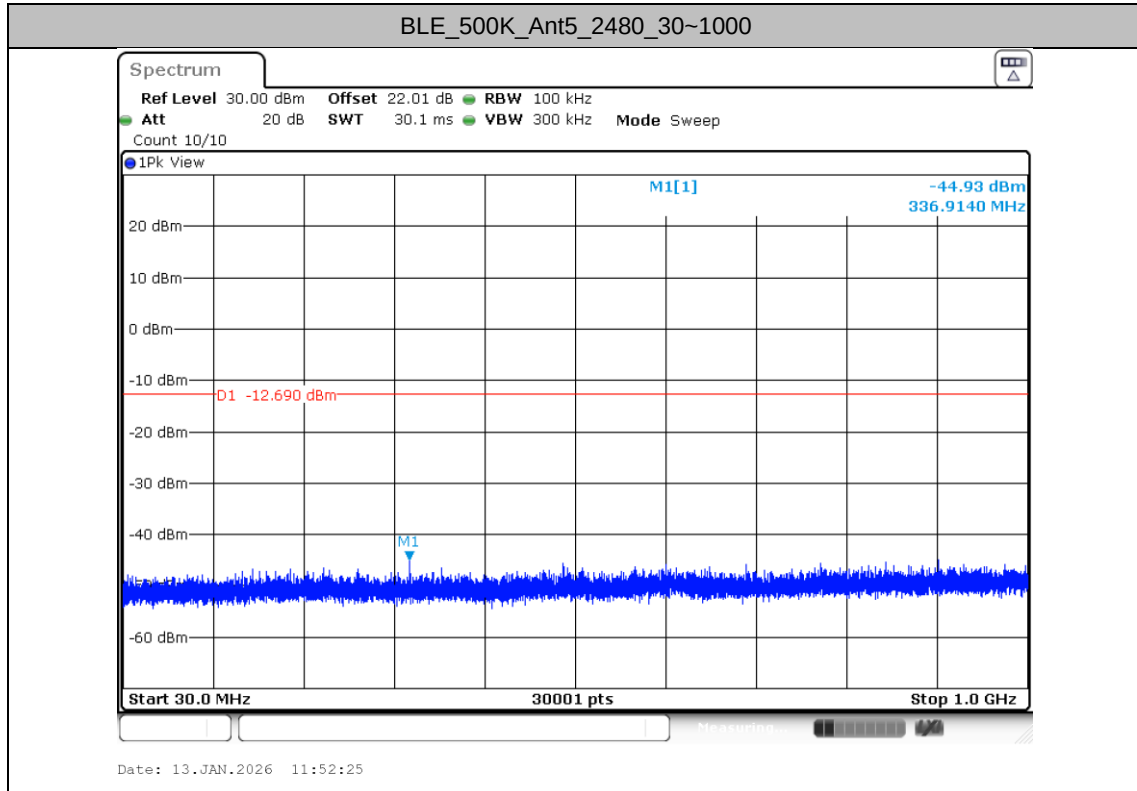




Appendix B. AC Conducted Emission Test Results

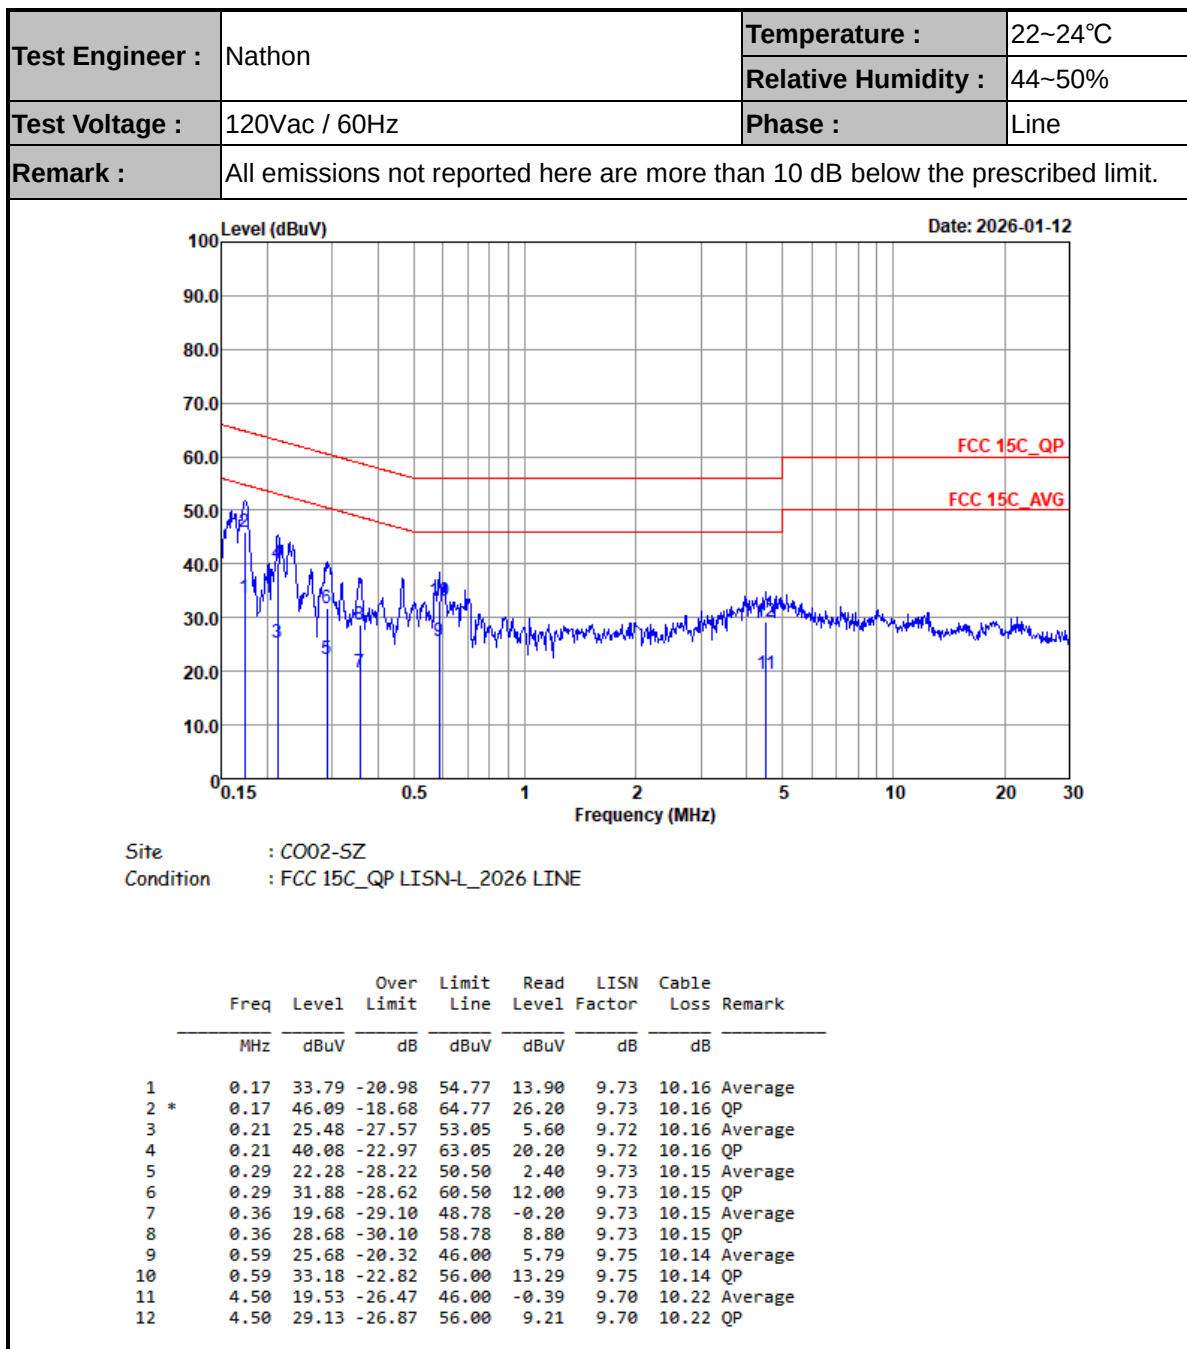



Test Engineer :	Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

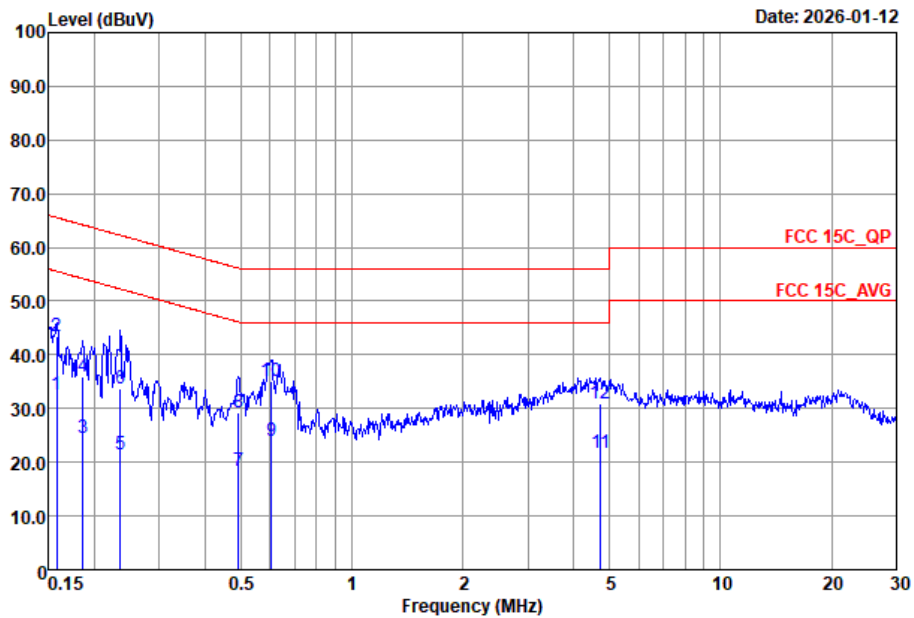

Site : C002-SZ
Condition : FCC 15C_QP LISN-N 2026 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.16	32.55	-23.01	55.56	12.60	9.79	10.16	Average
2	0.16	43.35	-22.21	65.56	23.40	9.79	10.16	QP
3	0.19	24.64	-29.56	54.20	4.70	9.78	10.16	Average
4	0.19	36.04	-28.16	64.20	16.10	9.78	10.16	QP
5	0.24	21.34	-30.92	52.26	1.40	9.78	10.16	Average
6	0.24	33.64	-28.62	62.26	13.70	9.78	10.16	QP
7	0.49	18.35	-27.79	46.14	-1.50	9.71	10.14	Average
8	0.49	29.35	-26.79	56.14	9.50	9.71	10.14	QP
9	0.60	23.91	-22.09	46.00	4.00	9.78	10.13	Average
10 *	0.60	35.01	-20.99	56.00	15.10	9.78	10.13	QP
11	4.72	21.78	-24.22	46.00	1.80	9.75	10.23	Average
12	4.72	30.98	-25.02	56.00	11.00	9.75	10.23	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Jia Kuang	Relative Humidity :	48~49%
		Temperature :	24~25 °C





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	11	Bluetooth-LE_GSKF	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	11	Bluetooth-LE_GSKF	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	11	Bluetooth-LE_GSKF	39	2480	1Mbps	-	-
Mode 4	2400-2483.5	11	Bluetooth-LE_GSKF	01	2404	2Mbps	-	-
Mode 5	2400-2483.5	11	Bluetooth-LE_GSKF	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	11	Bluetooth-LE_GSKF	38	2478	2Mbps	-	-
Mode 7	2400-2483.5	5	Bluetooth-LE_GSKF	00	2402	1Mbps	-	-
Mode 8	2400-2483.5	5	Bluetooth-LE_GSKF	19	2440	1Mbps	-	-
Mode 9	2400-2483.5	5	Bluetooth-LE_GSKF	39	2480	1Mbps	-	-
Mode 10	2400-2483.5	5	Bluetooth-LE_GSKF	01	2404	2Mbps	-	-
Mode 11	2400-2483.5	5	Bluetooth-LE_GSKF	19	2440	2Mbps	-	-
Mode 12	2400-2483.5	5	Bluetooth-LE_GSKF	38	2478	2Mbps	-	-
Mode 13	2400-2483.5	11	Bluetooth-LE_GSKF LF	39	2480	1Mbps	-	-





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	PEAK Avg.	Result	Remark
1	Bluetooth-LE_GSKF	00	2389.59	35.86	54.00	-18.14	V	AVERAGE	Pass	Band Edge
1	Bluetooth-LE_GSKF	00	4804.00	45.33	74.00	-28.67	V	Peak	Pass	Harmonic
2	Bluetooth-LE_GSKF	19	-	-	-	-	-	-	-	Band Edge
2	Bluetooth-LE_GSKF	19	7320.00	46.41	74.00	-27.59	V	Peak	Pass	Harmonic
3	Bluetooth-LE_GSKF	39	2483.60	43.91	54.00	-10.09	H	AVERAGE	Pass	Band Edge
3	Bluetooth-LE_GSKF	39	7440.00	46.45	74.00	-27.55	V	Peak	Pass	Harmonic
4	Bluetooth-LE_GSKF	01	2361.66	37.33	54.00	-16.67	H	AVERAGE	Pass	Band Edge
4	Bluetooth-LE_GSKF	01	4808.00	45.37	74.00	-28.63	V	Peak	Pass	Harmonic
5	Bluetooth-LE_GSKF	19	-	-	-	-	-	-	-	Band Edge
5	Bluetooth-LE_GSKF	19	4880.00	46.24	74.00	-27.76	V	Peak	Pass	Harmonic
6	Bluetooth-LE_GSKF	38	2483.52	41.25	54.00	-12.75	H	AVERAGE	Pass	Band Edge
6	Bluetooth-LE_GSKF	38	7434.00	46.70	74.00	-27.30	V	Peak	Pass	Harmonic
7	Bluetooth-LE_GSKF	00	2361.35	35.64	54.00	-18.36	V	AVERAGE	Pass	Band Edge
7	Bluetooth-LE_GSKF	00	4804.00	45.20	74.00	-28.80	V	Peak	Pass	Harmonic
8	Bluetooth-LE_GSKF	19	-	-	-	-	-	-	-	Band Edge
8	Bluetooth-LE_GSKF	19	7320.00	46.99	74.00	-27.01	H	Peak	Pass	Harmonic
9	Bluetooth-LE_GSKF	39	2483.52	41.15	54.00	-12.85	V	AVERAGE	Pass	Band Edge
9	Bluetooth-LE_GSKF	39	7440.00	47.70	74.00	-26.30	V	Peak	Pass	Harmonic
10	Bluetooth-LE_GSKF	01	2359.98	37.10	54.00	-16.90	V	AVERAGE	Pass	Band Edge
10	Bluetooth-LE_GSKF	01	4808.00	45.12	74.00	-28.88	V	Peak	Pass	Harmonic
11	Bluetooth-LE_GSKF	19	-	-	-	-	-	-	-	Band Edge
11	Bluetooth-LE_GSKF	19	7320.00	45.72	74.00	-28.28	V	Peak	Pass	Harmonic
12	Bluetooth-LE_GSKF	38	2483.65	40.02	54.00	-13.98	V	AVERAGE	Pass	Band Edge
12	Bluetooth-LE_GSKF	38	4956.00	45.89	74.00	-28.11	V	Peak	Pass	Harmonic
13	Bluetooth-LE_GSKF LF	39	30.00	27.10	40.00	-12.90	V	Peak	Pass	LF

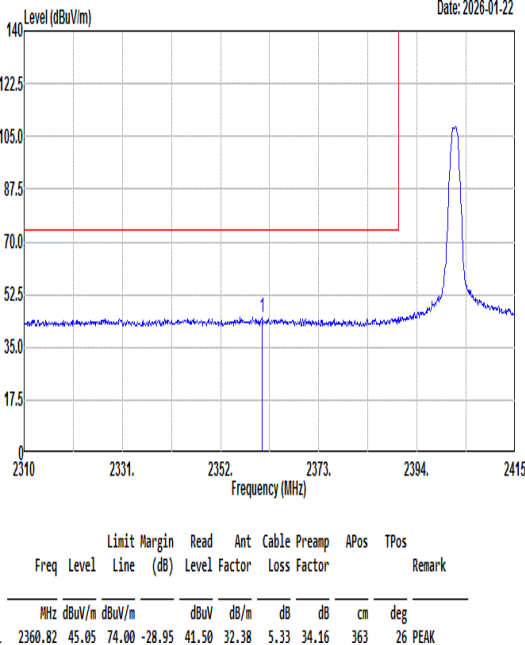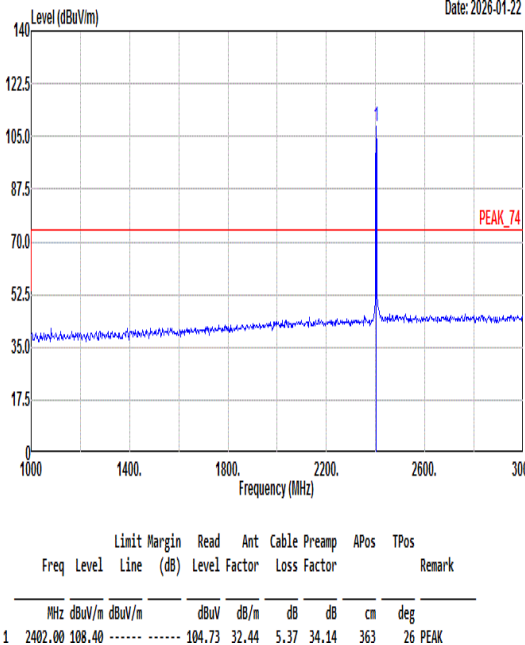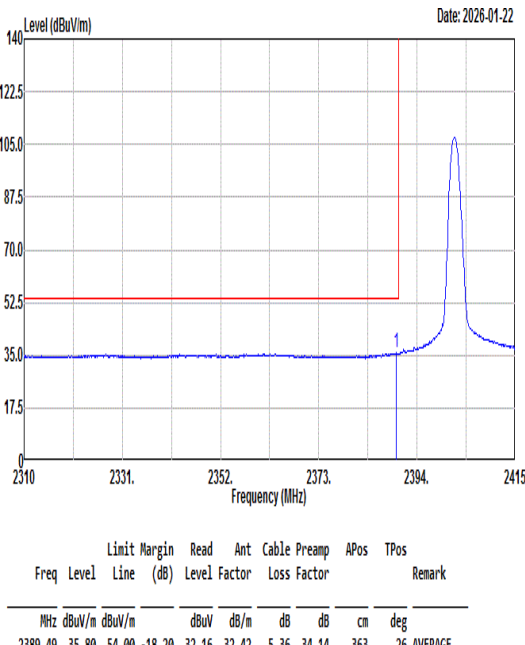
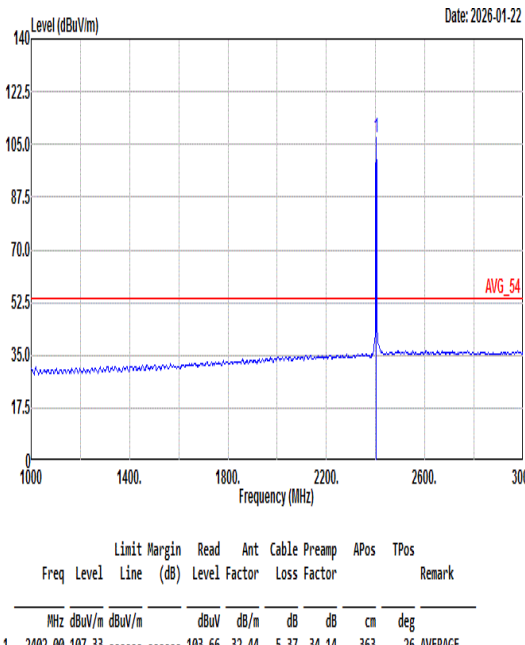


Mode	1	
	Band Edge	
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz	
ANT	11	
Pol.	Horizontal	Fundamental
Peak		
Avg		

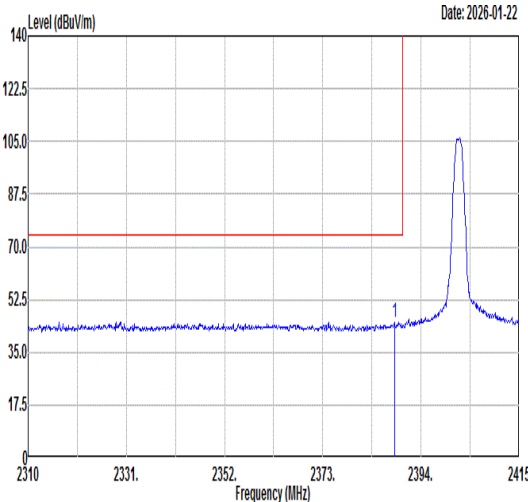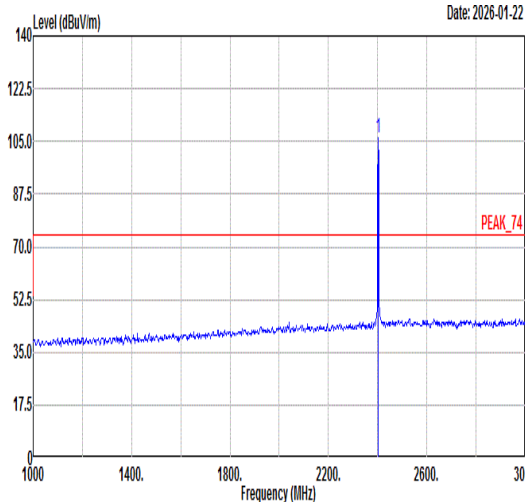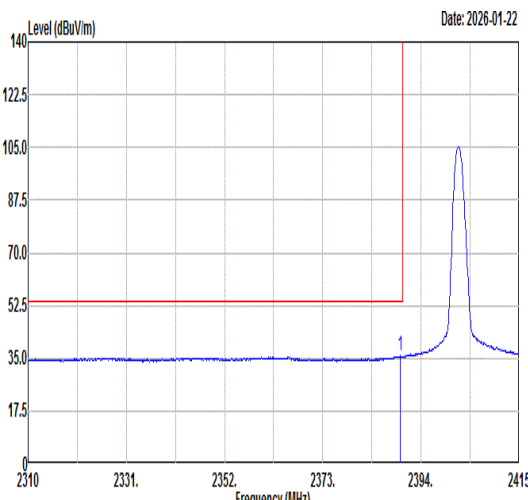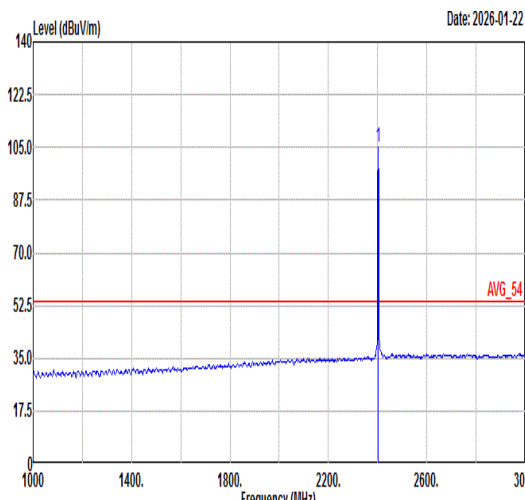

Mode	1																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																	
ANT	11																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2026-01-22  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.33</td><td>45.03</td><td>74.00</td><td>-28.97</td><td>41.39</td><td>32.42</td><td>5.36</td><td>34.14</td><td>267 88 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.33	45.03	74.00	-28.97	41.39	32.42	5.36	34.14	267 88 PEAK	Level (dBuV/m) Date: 2026-01-22  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>106.21</td><td>-----</td><td>-----</td><td>102.54</td><td>32.44</td><td>5.37</td><td>34.14</td><td>267 88 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	106.21	-----	-----	102.54	32.44	5.37	34.14	267 88 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2388.33	45.03	74.00	-28.97	41.39	32.42	5.36	34.14	267 88 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2402.00	106.21	-----	-----	102.54	32.44	5.37	34.14	267 88 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2026-01-22  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.59</td><td>35.86</td><td>54.00</td><td>-18.14</td><td>32.22</td><td>32.42</td><td>5.36</td><td>34.14</td><td>267 88 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.59	35.86	54.00	-18.14	32.22	32.42	5.36	34.14	267 88 AVERAGE	Level (dBuV/m) Date: 2026-01-22  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>105.11</td><td>-----</td><td>-----</td><td>101.44</td><td>32.44</td><td>5.37</td><td>34.14</td><td>267 88 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	105.11	-----	-----	101.44	32.44	5.37	34.14	267 88 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.59	35.86	54.00	-18.14	32.22	32.42	5.36	34.14	267 88 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2402.00	105.11	-----	-----	101.44	32.44	5.37	34.14	267 88 AVERAGE																																																																									

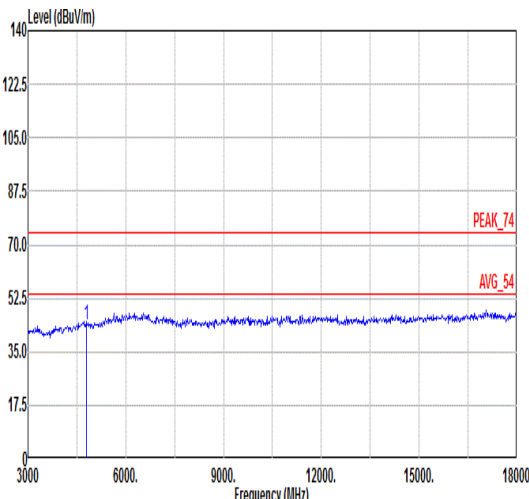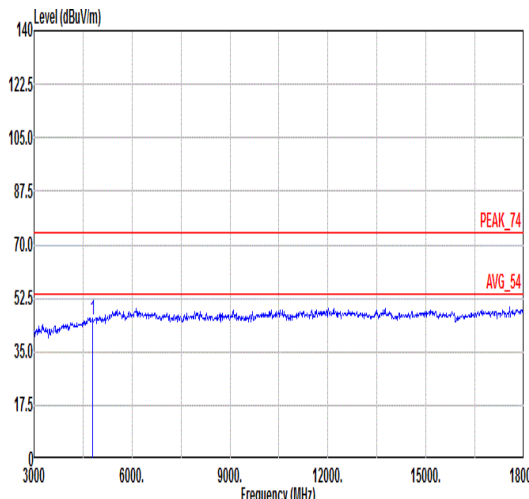

Mode	1																																																																																												
	Harmonic																																																																																												
	2400-2483.5_Bluetooth-LE_GSKF_CH00_2402MHz																																																																																												
ANT	11																																																																																												
Pol.	Horizontal										Vertical																																																																																		
Peak Avg																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>44.03</td><td>74.00</td><td>-29.97</td><td>52.92</td><td>35.00</td><td>8.94</td><td>52.83</td><td>---</td><td>---</td><td>Peak</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	44.03	74.00	-29.97	52.92	35.00	8.94	52.83	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>45.33</td><td>74.00</td><td>-28.67</td><td>54.22</td><td>35.00</td><td>8.94</td><td>52.83</td><td>---</td><td>---</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	45.33	74.00	-28.67	54.22	35.00	8.94	52.83	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	4804.00	44.03	74.00	-29.97	52.92	35.00	8.94	52.83	---	---	Peak																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	4804.00	45.33	74.00	-28.67	54.22	35.00	8.94	52.83	---	---	Peak																																																																																		



Mode	2																																																																																																																		
	Harmonic																																																																																																																		
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																																																																		
ANT	11																																																																																																																		
Pol.	Horizontal						Vertical																																																																																																												
Peak Avg																																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>44.11</td><td>74.00</td><td>-29.89</td><td>52.90</td><td>35.08</td><td>8.71</td><td>52.58</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>45.41</td><td>74.00</td><td>-28.59</td><td>51.43</td><td>36.10</td><td>10.18</td><td>52.30</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	44.11	74.00	-29.89	52.90	35.08	8.71	52.58	---	---	Peak	2	7320.00	45.41	74.00	-28.59	51.43	36.10	10.18	52.30	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>46.22</td><td>74.00</td><td>-27.78</td><td>55.01</td><td>35.08</td><td>8.71</td><td>52.58</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>46.41</td><td>74.00</td><td>-27.59</td><td>52.43</td><td>36.10</td><td>10.18</td><td>52.30</td><td>---</td><td>---</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	46.22	74.00	-27.78	55.01	35.08	8.71	52.58	---	---	Peak	2	7320.00	46.41	74.00	-27.59	52.43	36.10	10.18	52.30	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	4880.00	44.11	74.00	-29.89	52.90	35.08	8.71	52.58	---	---	Peak																																																																																																								
2	7320.00	45.41	74.00	-28.59	51.43	36.10	10.18	52.30	---	---	Peak																																																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																										
1	4880.00	46.22	74.00	-27.78	55.01	35.08	8.71	52.58	---	---	Peak																																																																																																								
2	7320.00	46.41	74.00	-27.59	52.43	36.10	10.18	52.30	---	---	Peak																																																																																																								





Mode	3																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz																																																																									
ANT	11																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	Date: 2026-01-22 Horizontal Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 2480 to 2500 MHz. A red limit line is at 74.00 dB. The signal is at 52.78 dB. A peak is marked at 2483.54 MHz. <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2483.54</td><td>52.78</td><td>74.00</td><td>-21.22</td><td>48.37</td><td>32.57</td><td>5.95</td><td>34.11</td><td>200 15 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg	1 2483.54	52.78	74.00	-21.22	48.37	32.57	5.95	34.11	200 15 PEAK	Date: 2026-01-22 Fundamental Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 1000 to 3000 MHz. A red limit line is at 74.00 dB. The signal is at 109.45 dB. A peak is marked at 2480.00 MHz. <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2480.00</td><td>109.45</td><td>-----</td><td>-----</td><td>105.07</td><td>32.57</td><td>5.92</td><td>34.11</td><td>200 15 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg	1 2480.00	109.45	-----	-----	105.07	32.57	5.92	34.11	200 15 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg																																																																		
1 2483.54	52.78	74.00	-21.22	48.37	32.57	5.95	34.11	200 15 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg																																																																		
1 2480.00	109.45	-----	-----	105.07	32.57	5.92	34.11	200 15 PEAK																																																																		
Avg	Date: 2026-01-22 Horizontal Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 2480 to 2500 MHz. A red limit line is at 54.00 dB. The signal is at 43.91 dB. An average is marked at 2483.60 MHz. <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2483.60</td><td>43.91</td><td>54.00</td><td>-10.09</td><td>39.50</td><td>32.57</td><td>5.95</td><td>34.11</td><td>200 15 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg	1 2483.60	43.91	54.00	-10.09	39.50	32.57	5.95	34.11	200 15 AVERAGE	Date: 2026-01-22 Fundamental Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 1000 to 3000 MHz. A red limit line is at 54.00 dB. The signal is at 108.50 dB. An average is marked at 2480.00 MHz. <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2480.00</td><td>108.50</td><td>-----</td><td>-----</td><td>104.12</td><td>32.57</td><td>5.92</td><td>34.11</td><td>200 15 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg	1 2480.00	108.50	-----	-----	104.12	32.57	5.92	34.11	200 15 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg																																																																		
1 2483.60	43.91	54.00	-10.09	39.50	32.57	5.95	34.11	200 15 AVERAGE																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	cm	deg																																																																		
1 2480.00	108.50	-----	-----	104.12	32.57	5.92	34.11	200 15 AVERAGE																																																																		







Mode	3	
	Band Edge	
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz	
ANT	11	
Pol.	Vertical	Fundamental
Peak	</	



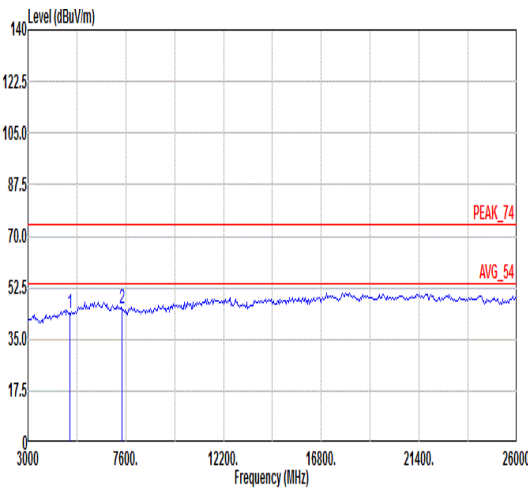
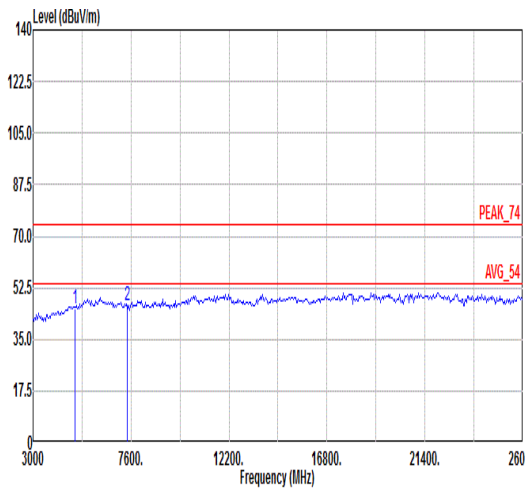


Mode	3																																																																																																																																	
	Harmonic																																																																																																																																	
	2400-2483.5_Bluetooth-LE_GSKF_CH39_2480MHz & worst mode 18G-26GHz																																																																																																																																	
ANT	11																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4960.00</td><td>43.94</td><td>74.00</td><td>-30.06</td><td>52.65</td><td>35.16</td><td>8.46</td><td>52.33</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>45.20</td><td>74.00</td><td>-28.80</td><td>51.23</td><td>36.10</td><td>10.17</td><td>52.30</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4960.00	43.94	74.00	-30.06	52.65	35.16	8.46	52.33	---	---	Peak	2	7440.00	45.20	74.00	-28.80	51.23	36.10	10.17	52.30	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4960.00</td><td>45.49</td><td>74.00</td><td>-28.51</td><td>54.20</td><td>35.16</td><td>8.46</td><td>52.33</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>46.45</td><td>74.00</td><td>-27.55</td><td>52.48</td><td>36.10</td><td>10.17</td><td>52.30</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4960.00	45.49	74.00	-28.51	54.20	35.16	8.46	52.33	---	---	Peak	2	7440.00	46.45	74.00	-27.55	52.48	36.10	10.17	52.30	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	4960.00	43.94	74.00	-30.06	52.65	35.16	8.46	52.33	---	---	Peak																																																																																																																							
2	7440.00	45.20	74.00	-28.80	51.23	36.10	10.17	52.30	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	4960.00	45.49	74.00	-28.51	54.20	35.16	8.46	52.33	---	---	Peak																																																																																																																							
2	7440.00	46.45	74.00	-27.55	52.48	36.10	10.17	52.30	---	---	Peak																																																																																																																							

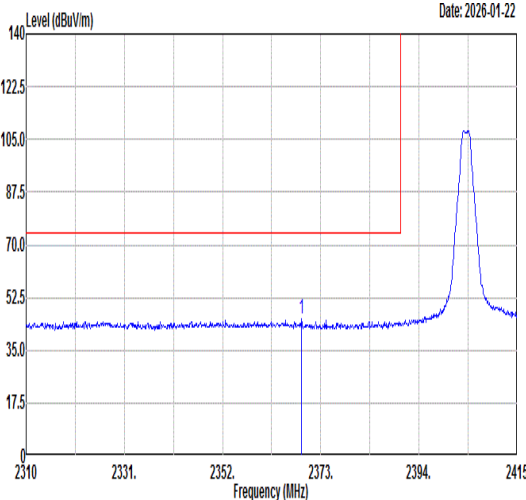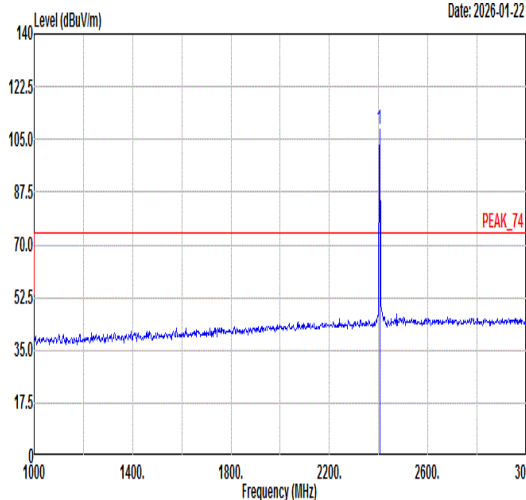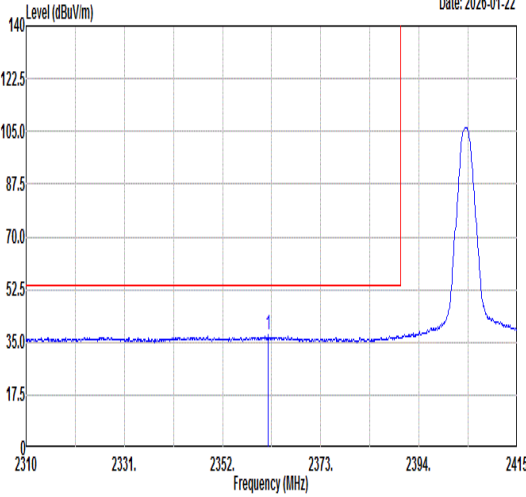
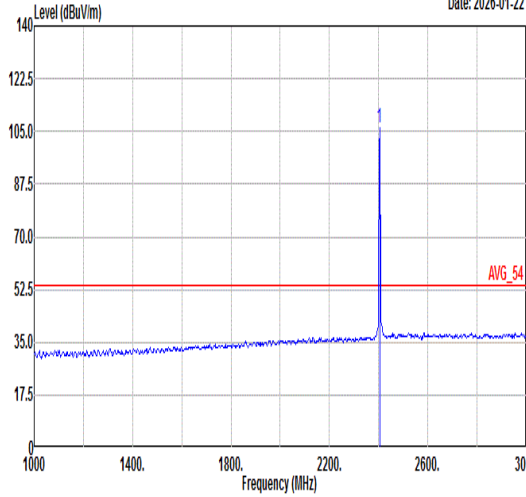


Mode	4																																																																																													
	Band Edge																																																																																													
	2400-2483.5_Bluetooth-LE_GSKF_CH01_2404MHz																																																																																													
ANT	11																																																																																													
Pol.	Horizontal						Fundamental																																																																																							
Peak																																																																																														
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2368.91</td><td>45.22</td><td>74.00</td><td>-28.78</td><td>41.64</td><td>32.39</td><td>5.34</td><td>34.15</td><td>366</td><td>27</td><td>PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2368.91	45.22	74.00	-28.78	41.64	32.39	5.34	34.15	366	27	PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>108.11</td><td>-----</td><td>-----</td><td>104.43</td><td>32.45</td><td>5.37</td><td>34.14</td><td>366</td><td>27</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2404.00	108.11	-----	-----	104.43	32.45	5.37	34.14	366	27
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2368.91	45.22	74.00	-28.78	41.64	32.39	5.34	34.15	366	27	PEAK																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2404.00	108.11	-----	-----	104.43	32.45	5.37	34.14	366	27	PEAK																																																																																			
Avg																																																																																														
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2361.66</td><td>37.33</td><td>54.00</td><td>-16.67</td><td>33.77</td><td>32.38</td><td>5.34</td><td>34.16</td><td>366</td><td>27</td><td>AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2361.66	37.33	54.00	-16.67	33.77	32.38	5.34	34.16	366	27	AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>106.10</td><td>-----</td><td>-----</td><td>102.42</td><td>32.45</td><td>5.37</td><td>34.14</td><td>366</td><td>27</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2404.00	106.10	-----	-----	102.42	32.45	5.37	34.14	366	27
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2361.66	37.33	54.00	-16.67	33.77	32.38	5.34	34.16	366	27	AVERAGE																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2404.00	106.10	-----	-----	102.42	32.45	5.37	34.14	366	27	AVERAGE																																																																																			

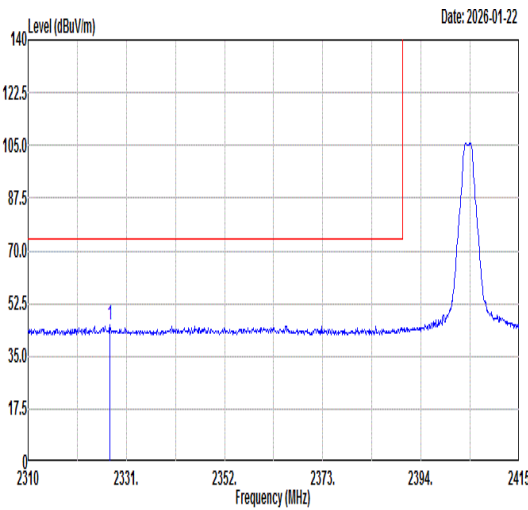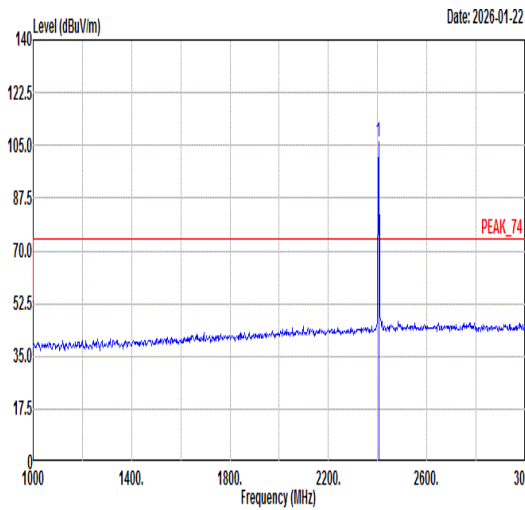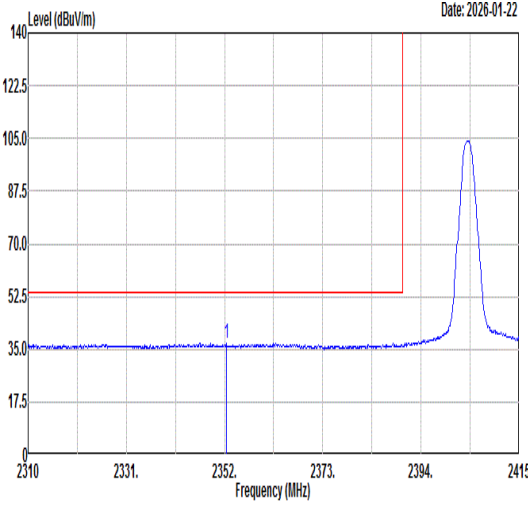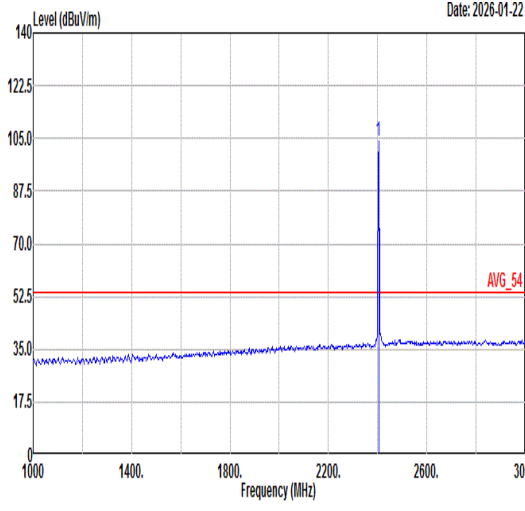

Mode	4																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_GSKF_CH01_2404MHz																																																																																	
ANT	11																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2026-01-22  <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2327.54</td><td>45.18</td><td>74.00</td><td>-28.82</td><td>41.72</td><td>32.32</td><td>5.31</td><td>34.17</td><td>273</td><td>76</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2327.54	45.18	74.00	-28.82	41.72	32.32	5.31	34.17	273	76	PEAK	Level (dBuV/m) Date: 2026-01-22  <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>105.94</td><td>-----</td><td>-----</td><td>102.26</td><td>32.45</td><td>5.37</td><td>34.14</td><td>273</td><td>76</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2404.00	105.94	-----	-----	102.26	32.45	5.37	34.14	273	76	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2327.54	45.18	74.00	-28.82	41.72	32.32	5.31	34.17	273	76	PEAK																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2404.00	105.94	-----	-----	102.26	32.45	5.37	34.14	273	76	PEAK																																																																							
Avg	Level (dBuV/m) Date: 2026-01-22  <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2352.42</td><td>37.05</td><td>54.00</td><td>-16.95</td><td>33.52</td><td>32.36</td><td>5.33</td><td>34.16</td><td>273</td><td>76</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2352.42	37.05	54.00	-16.95	33.52	32.36	5.33	34.16	273	76	AVERAGE	Level (dBuV/m) Date: 2026-01-22  <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>103.83</td><td>-----</td><td>-----</td><td>100.15</td><td>32.45</td><td>5.37</td><td>34.14</td><td>273</td><td>76</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2404.00	103.83	-----	-----	100.15	32.45	5.37	34.14	273	76	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2352.42	37.05	54.00	-16.95	33.52	32.36	5.33	34.16	273	76	AVERAGE																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2404.00	103.83	-----	-----	100.15	32.45	5.37	34.14	273	76	AVERAGE																																																																							

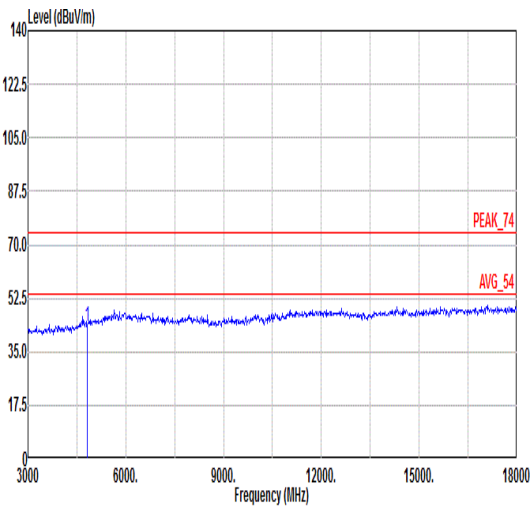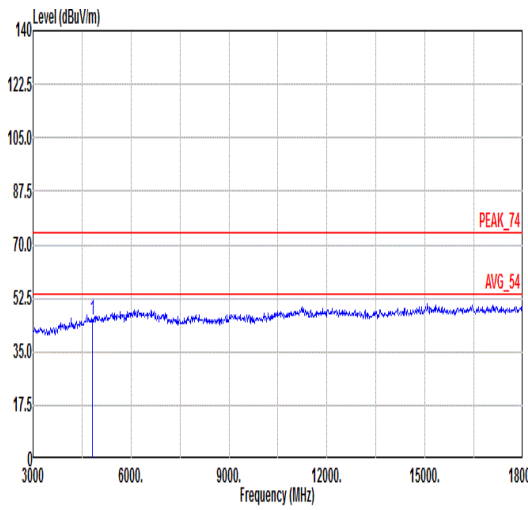

Mode	4																																																																																												
	Harmonic																																																																																												
	2400-2483.5_Bluetooth-LE_GSKF_CH01_2404MHz																																																																																												
ANT	11																																																																																												
Pol.	Horizontal						Vertical																																																																																						
Peak Avg																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4808.00</td><td>43.28</td><td>74.00</td><td>-30.72</td><td>52.16</td><td>35.01</td><td>8.92</td><td>52.81</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4808.00	43.28	74.00	-30.72	52.16	35.01	8.92	52.81	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4808.00</td><td>45.37</td><td>74.00</td><td>-28.63</td><td>54.25</td><td>35.01</td><td>8.92</td><td>52.81</td><td>---</td><td>---</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4808.00	45.37	74.00	-28.63	54.25	35.01	8.92	52.81	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	4808.00	43.28	74.00	-30.72	52.16	35.01	8.92	52.81	---	---	Peak																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	4808.00	45.37	74.00	-28.63	54.25	35.01	8.92	52.81	---	---	Peak																																																																																		



Mode	5																																																																					
	Harmonic																																																																					
	2400-2483.5_Bluetooth-LE_GSKF_CH19_2440MHz																																																																					
ANT	11																																																																					
Pol.	Horizontal																																																																					
Peak Avg																																																																						
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>44.44</td><td>74.00</td><td>-29.56</td><td>53.23</td><td>35.08</td><td>8.71</td><td>52.58</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>44.95</td><td>74.00</td><td>-29.05</td><td>50.97</td><td>36.10</td><td>10.18</td><td>52.30</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4880.00	44.44	74.00	-29.56	53.23	35.08	8.71	52.58	---	---	Peak	2	7320.00	44.95	74.00	-29.05	50.97	36.10	10.18	52.30	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																												
1	4880.00	44.44	74.00	-29.56	53.23	35.08	8.71	52.58	---	---	Peak																																																											
2	7320.00	44.95	74.00	-29.05	50.97	36.10	10.18	52.30	---	---	Peak																																																											
Peak Avg																																																																						
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>46.24</td><td>74.00</td><td>-27.76</td><td>55.03</td><td>35.08</td><td>8.71</td><td>52.58</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>45.34</td><td>74.00</td><td>-28.66</td><td>51.36</td><td>36.10</td><td>10.18</td><td>52.30</td><td>---</td><td>---</td><td>Peak</td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4880.00	46.24	74.00	-27.76	55.03	35.08	8.71	52.58	---	---	Peak	2	7320.00	45.34	74.00	-28.66	51.36	36.10	10.18	52.30	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																												
1	4880.00	46.24	74.00	-27.76	55.03	35.08	8.71	52.58	---	---	Peak																																																											
2	7320.00	45.34	74.00	-28.66	51.36	36.10	10.18	52.30	---	---	Peak																																																											