



FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : Xiaomi
MODEL NAME : 2602EPTC0G
FCC ID : 2AFZZPTC0G
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : 15E 6 GHz Low Power Dual Client (6CD)
(Indoor Low Power UNII-5/6/7/8)
TEST DATE(S) : Dec. 28, 2025 ~ Jan. 24, 2026

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



Table of Contents

1	General Description	5
1.1	Applicant	5
1.2	Manufacturer	5
1.3	Product Feature of Equipment Under Test	5
1.4	Product Specification of Equipment Under Test	6
1.5	Modification of EUT	9
1.6	Testing Location	9
1.7	Test Software	10
1.8	Applicable Standards	10
2	Test Configuration of Equipment Under Test	11
2.1	Carrier Frequency and Channel	11
2.2	Test Mode	11
2.3	Connection Diagram of Test System	16
2.4	Support Unit used in test configuration and system	16
2.5	EUT Operation Test Setup	16
2.6	Measurement Results Explanation Example	17
3	Test Result	18
3.1	26dB & 99% Occupied Bandwidth Measurement	18
3.2	Maximum conducted Output Power and Fundamental Maximum EIRP Measurement	19
3.3	Fundamental Power Spectral Density Measurement	20
3.4	In-Band Emissions (Channel Mask)	22
3.5	Contention Based Protocol	24
3.6	Unwanted Emissions Measurement	33
3.7	AC Conducted Emission Measurement	37
3.8	Antenna Requirements	39
4	List of Measuring Equipment	40
5	Measurement Uncertainty	41
	Appendix A. Conducted Test Results	
	Appendix B. AC Conducted Emission Test Result	
	Appendix C. Radiated Spurious Emission	
	Appendix D. Duty Cycle Plots	
	Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FR5D2207F	01	Initial issue of report	Feb. 06, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(a)(11)	26dB Emission Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)(8)	Maximum Conducted Output Power	Pass	-
3.2	15.407(a)(8)	Fundamental Maximum EIRP	Pass	-
3.3	15.407(a)(8)	Fundamental Power Spectral Density	Pass	-
3.4	15.407(b)(7)	In-Band Emissions (Channel Mask)	Pass	-
3.5	15.407(d)(6)	Contention Based Protocol	Pass	
3.6	15.407(b)	Unwanted Emissions	Pass	Under limit 5.23 dB at 7268.44 MHz
3.7	15.207	AC Conducted Emission	Pass	Under limit 21.66 dB at 4.647 MHz
3.8	15.203 15.407(a)	Antenna Requirement	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Xiaomi
Model Name	2602EPTC0G
FCC ID	2AFZZPTC0G
IMEI Code	Conducted: 862117080040378/862117080040379 Conduction: 862177080087326/862177080087334 Radiation: 862177080089967/862177080089975 CBP: 862117080040378/862117080040379
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	U-NII-5: 5925 MHz ~ 6425 MHz U-NII-6: 6425 MHz ~ 6525 MHz U-NII-7: 6525 MHz ~ 6875 MHz U-NII-8: 6875 MHz ~ 7125 MHz
Maximum EIRP	<MIMO Ant.6+13> <5925 MHz ~ 7125 MHz > 802.11ax HE20 : 6.48 dBm / 0.0044 W 802.11ax HE40 : 9.29 dBm / 0.0085 W 802.11ax HE80 : 11.79 dBm / 0.0151 W 802.11ax HE160 : 14.24 dBm / 0.0265 W 802.11be EHT20 : 6.50 dBm / 0.0045 W 802.11be EHT40 : 9.32 dBm / 0.0086 W 802.11be EHT80 : 11.84 dBm / 0.0153 W 802.11be EHT160 : 14.29 dBm / 0.0269 W 802.11be EHT320 : 14.92 dBm / 0.0310 W
99% Occupied Bandwidth	802.11be EHT20 : 18.867 MHz 802.11be EHT40 : 37.887 MHz 802.11be EHT80 : 77.22 MHz 802.11be EHT160 : 156.421 MHz 802.11be EHT320 : 314.365 MHz
Antenna Type / Gain	<5925 MHz ~ 6425 MHz > <Ant. 6> : PIFA Antenna with gain -3.1 dBi <Ant. 13> : PIFA Antenna with gain -3.1 dBi <6425 MHz ~ 6525 MHz > <Ant. 6> : PIFA Antenna with gain -2.8 dBi <Ant. 13> : PIFA Antenna with gain -2.8 dBi <6525 MHz ~ 6875 MHz > <Ant. 6> : PIFA Antenna with gain -2.5 dBi <Ant. 13> : PIFA Antenna with gain -2.5 dBi <6875 MHz ~ 7125 MHz > <Ant. 6> : PIFA Antenna with gain -2.4 dBi <Ant. 13> : PIFA Antenna with gain -2.4 dBi
Type of Modulation	802.11ax: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM) 802.11be: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM / 4096QAM)

Remark:

1. WIFI MIMO support CDD by manufacturer declared.
2. For WLAN SISO/MIMO mode, the whole testing has assessed only MIMO mode by referring to their higher conducted power.
3. For 802.11ax/be 20/40/80/160MHz mode, the whole testing has assessed only 802.11be EHT20/EHT40/EHT80/EHT160MHz by referring to the higher output power.
4. 802.11ax/be support full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) are tested for conducted power/PSD/Channel Mask in appendix A, all the other test case were performed with full RU with its maximum power/PSD.

5. CBP test with antenna path of minimum gain (Minimum gain= -3.1dBi).
6. The channel puncturing mode is for improving network performance and not available for CBP, the CBP will apply channel bandwidth reduction mechanism to protect incumbent operations.
7. The device does not support UNII-5 CH2(5935MHz) & UNII-8 CH233(7115MHz) by manufacturer declared.
8. For UNII-5/7, the RSE was tested using outdoor high power, so the indoor RSE are leveraged from outdoor report.
9. 802.11be support small size RU, Large size RU and Puncturing modes as below, which is less than full RU conducted power, therefore have assessed only Power Density/MASK/RSE.

<Small size RU 52+26 Tone>:

Bandwidth	Tones		Index		For test modes configure
20MHz	26	52	1	38	1
20MHz	52	26	39	7	3

<Small size RU 106+26 Tone>:

Bandwidth	Tones		Index		For test modes configure
20MHz	106	26	53	4	1
20MHz	26	106	4	54	2

<Large size RU 484+242 tone> & <80M BW Puncturing 20MHz>:

Bandwidth	Tones		Index		For test modes configure
80MHz	242	484	62	66	1
80MHz	242	484	61	66	2
80MHz	484	242	65	64	3
80MHz	484	242	65	63	4

<Large size RU 996+484 tone> & <160M BW Puncturing 40MHz>:

Bandwidth	Tones		Index		For test modes configure
160MHz	484-Left	996-Right	66-Left	67-Right	1
160MHz	484-Left	996-Right	65-Left	67-Right	2
160MHz	996-Left	484-Right	67-Left	66-Right	3
160MHz	996-Left	484-Right	67-Left	65-Right	4

<160M BW Puncturing 20MHz>:

Bandwidth	Tones			Index			For test modes configure
160MHz	242-Left	484-Left	996-Right	62-Left	66-Left	67-Right	1
160MHz	242-Left	484-Left	996-Right	61-Left	66-Left	67-Right	2
160MHz	484-Left	242-Left	996-Right	65-Left	64-Left	67-Right	3
160MHz	484-Left	242-Left	996-Right	65-Left	63-Left	67-Right	4
160MHz	996-Left	242-Right	484-Right	67-Left	62-Right	66-Right	5
160MHz	996-Left	242-Right	484-Right	67-Left	61-Right	66-Right	6
160MHz	996-Left	484-Right	242-Right	67-Left	65-Right	64-Right	7
160MHz	996-Left	484-Right	242-Right	67-Left	65-Right	63-Right	8


<Large size RU 3*996 tone> & <320M BW Puncturing 80MHz>:

Bandwidth	Tones	Index	For test modes configure
320MHz			1
			2
			3
			4

<Large size RU 3*996+484 tone> & <320M BW Puncturing 40MHz>:

Bandwidth	Tones	Index	For test modes configure
320MHz			1
			2
			3
			4
			5
			6
			7
			8

<Large size RU 2*996+484 tone> & <320M BW Puncturing 80+40MHz>:

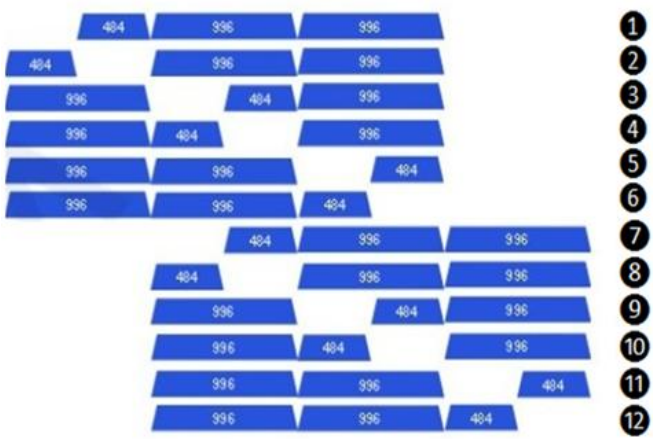Bandwidth	Tones	Index	For test modes configure
320MHz		1	1
		2	2
		3	3
		4	4
		5	5
		6	6
		7	7
		8	8
		9	9
		10	10
		11	11
		12	12

Only the worse cases are shown in this report.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS DFS01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v03
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2020+Cor.1-2023

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

<U-NII-5, 6, 7, 8>

BW 20M	Channel	-	1	5	9	13	17	21	25	29
	Freq. (MHz)	-	5955	5975	5995	6015	6035	6055	6075	6095
BW 40M	Channel	3			11		19		27	
	Freq. (MHz)	5965			6005		6045		6085	
BW 80M	Channel	7					23			
	Freq. (MHz)	5985					6065			
BW 160M	Channel	15								
	Freq. (MHz)	6025								

BW 20M	Channel	33	37	41	45	49	53	57	61
	Freq. (MHz)	6115	6135	6155	6175	6195	6215	6235	6255
BW 40M	Channel	35		43		51		59	
	Freq. (MHz)	6125		6165		6205		6245	
BW 80M	Channel	39				55			
	Freq. (MHz)	6145				6225			
BW 160M	Channel	47							
	Freq. (MHz)	6185							
BW 320M	Channel	31				63			
	Freq. (MHz)	6105				6265			



BW 20M	Channel	65	69	73	77	81	85	89	93
	Freq. (MHz)	6275	6295	6315	6335	6355	6375	6395	6415
BW 40M	Channel	67		75		83		91	
	Freq. (MHz)	6285		6325		6365		6405	
BW 80M	Channel	71				87			
	Freq. (MHz)	6305				6385			
BW 160M	Channel	79							
	Freq. (MHz)	6345							
BW 320M	Channel	95							
	Freq. (MHz)	6425							

BW 20M	Channel	97	101	105	109	113	117	121	125
	Freq. (MHz)	6435	6455	6475	6495	6515	6535	6555	6575
BW 40M	Channel	99		107		115		123	
	Freq. (MHz)	6445		6485		6525		6565	
BW 80M	Channel	103				119			
	Freq. (MHz)	6465				6545			
BW 160M	Channel	111							
	Freq. (MHz)	6505							

BW 20M	Channel	129	133	137	141	145	149	153	157
	Freq. (MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	Channel	131		139		147		155	
	Freq. (MHz)	6605		6645		6685		6725	
BW 80M	Channel	135				151			
	Freq. (MHz)	6625				6705			
BW 160M	Channel	143							
	Freq. (MHz)	6665							
BW 320M	Channel	127							
	Freq. (MHz)	6585							



BW 20M	Channel	161	165	169	173	177	181	185	189
	Freq. (MHz)	6755	6775	6795	6815	6835	6855	6875	6895
BW 40M	Channel	163		171		179		187	
	Freq. (MHz)	6765		6805		6845		6885	
BW 80M	Channel	167				183			
	Freq. (MHz)	6785				6865			
BW 160M	Channel	175							
	Freq. (MHz)	6825							
BW 320M	Channel	159							
	Freq. (MHz)	6745							

BW 20M	Channel	193	197	201	205	209	213	217	221
	Freq. (MHz)	6915	6935	6955	6975	6995	7015	7035	7055
BW 40M	Channel	195		203		211		219	
	Freq. (MHz)	6925		6965		7005		7045	
BW 80M	Channel	199				215			
	Freq. (MHz)	6945				7025			
BW 160M	Channel	207							
	Freq. (MHz)	6985							
BW 320M	Channel	191							
	Freq. (MHz)	6905							

BW 20M	Channel	225	229	-
	Freq. (MHz)	7075	7095	-
BW 40M	Channel	227		
	Freq. (MHz)	7085		

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0
802.11ax HE160	MCS0
802.11be EHT20	MCS0
802.11be EHT40	MCS0
802.11be EHT80	MCS0
802.11be EHT160	MCS0
802.11be EHT320	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM 850 Idle+ BT Link+ WLAN Link(6G)+ USB Cable1(Charging From Adapter)
Remark: For Radiated Test Cases, the tests were performed with Adapter and USB Cable1.	

Ch. #		UNII-5	UNII-6	UNII-7	UNII-8
		20M BW	20M BW	20M BW	20M BW
L	Low	001	097	117	189
M	Middle	045	105	149	209
H	High	093	113	181	229
Straddle		-	-	-	185

Ch. #		UNII-5	UNII-6	UNII-7	UNII-8
		40M BW	40M BW	40M BW	40M BW
L	Low	003	099	123	195
M	Middle	043	-	147	203
H	High	091	107	179	227
Straddle		-	115	-	187


Ch. #		UNII-5	UNII-6	UNII-7	UNII-8
		80M BW	80M BW	80M BW	80M BW
L	Low	007	103	135	199
M	Middle	039		151	-
H	High	087		167	215
Straddle		-	119	183	-

Ch. #		UNII-5	UNII-6	UNII-7	UNII-8
		160M BW	160M BW	160M BW	160M BW
L	Low	015	-	143	207
M	Middle	047			
H	High	079			
Straddle		-	111	175	-

Ch. #		UNII-5	UNII-6	UNII-7	UNII-8
		320M BW	320M BW	320M BW	320M BW
L	Low	-	-	-	-
M	Middle	031			
H	High	063			
Straddle		95	127	159	191

Remark: For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.

2.3 Connection Diagram of Test System

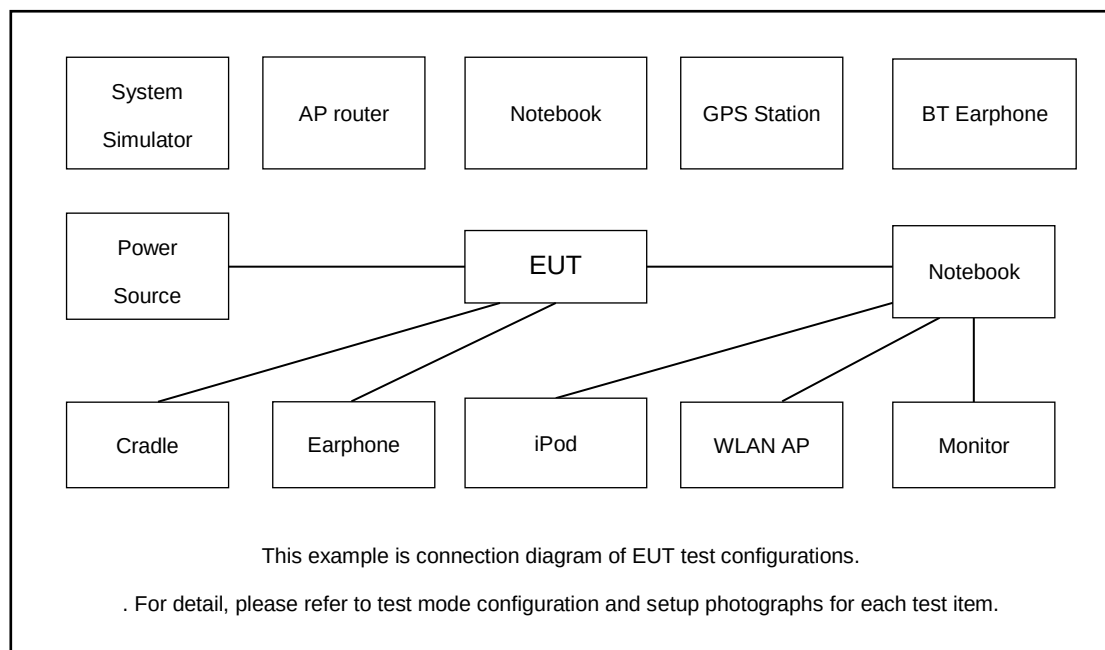

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritus	MT8821C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	xiaomi	LYEJ02LM	N/A	N/A	N/A
3.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
4.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program (QRCT TX Tool) was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.25 dB and 20dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5.25 + 20 = 25.25 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 CFR 15.407 (a)(11)

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

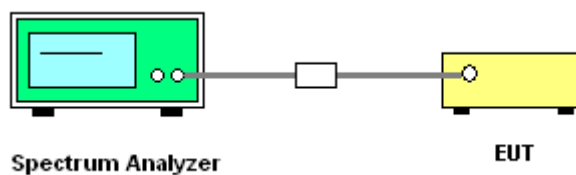

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum conducted Output Power and Fundamental Maximum EIRP Measurement

3.2.1 Limit of Fundamental Maximum EIRP

(a)(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

3.2.4 Test Setup

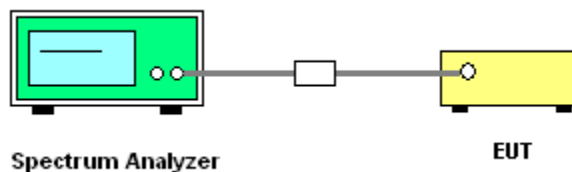

3.2.5 Test Result of Fundamental Maximum EIRP

Please refer to Appendix A.



3.3 Fundamental Power Spectral Density Measurement

3.3.1 Limit of Fundamental Power Spectral Density

(a)(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-2


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, attenuator loss and duty factor. Measure the PSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

3.3.4 Test Setup

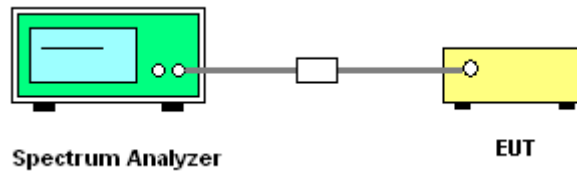

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 In-Band Emissions (Channel Mask)

3.4.1 Limit of Unwanted Emissions

(b)(7) For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures


The testing follows FCC KDB 987594 D02 U-NII 6GHz EMC Measurement.

Section J) In-Band Emissions.

1. Take nominal bandwidth as reference channel bandwidth provided that 26 dB emission bandwidth is always larger than nominal bandwidth
2. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
3. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - a. Suppressed by 20 dB at 1 MHz outside of the channel edge.
 - b. Suppressed by 28 dB at one channel bandwidth from the channel center.
 - c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel

- center.
4. Adjust the span to encompass the entire mask as necessary.
 5. Clear trace.
 6. Trace average at least 100 traces in power averaging (rms) mode.
 7. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

3.4.4 Test Setup

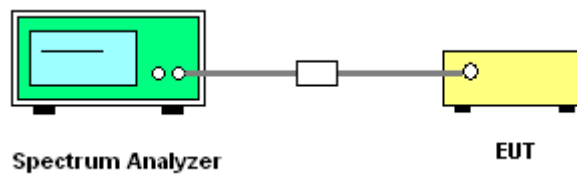

3.4.5 Test Result

Please refer to Appendix A.

3.5 Contention Based Protocol

3.5.1 Limit of Contention Based Protocol

(d)(6) All U-NII transmitters, except for standard power access points and fixed client devices, operating in the 5.925-7.125 GHz band must employ a contention-based protocol.

Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.

Table 1. Criteria to determine number of times detection threshold test may be performed

If	Number of Tests	Placement of Incumbent Transmission
$BW_{EUT} \leq BW_{Inc}$	Once	Tune incumbent and EUT transmissions ($f_{c1} = f_{c2}$)
$BW_{Inc} < BW_{EUT} \leq 2BW_{Inc}$	Once	Incumbent transmission is contained within BW_{EUT}
$2BW_{Inc} < BW_{EUT} \leq 4BW_{Inc}$	Twice. Incumbent transmission is contained within BW_{EUT}	Incumbent transmission is located as closely as possible to the lower edge and upper edge, respectively, of the EUT channel
$BW_{EUT} > 4BW_{Inc}$	Three times	Incumbent transmission is located as closely as possible to the lower edge of the EUT channel, in the middle of EUT channel, and as closely as possible to the upper edge of the EUT channel


where:

BW_{EUT} : Transmission bandwidth of EUT signal

BW_{Inc} : Transmission bandwidth of the simulated incumbent signal (10 MHz wide AWGN signal)

f_{c1} : Center frequency of EUT transmission

f_{c2} : Center frequency of simulated incumbent signal

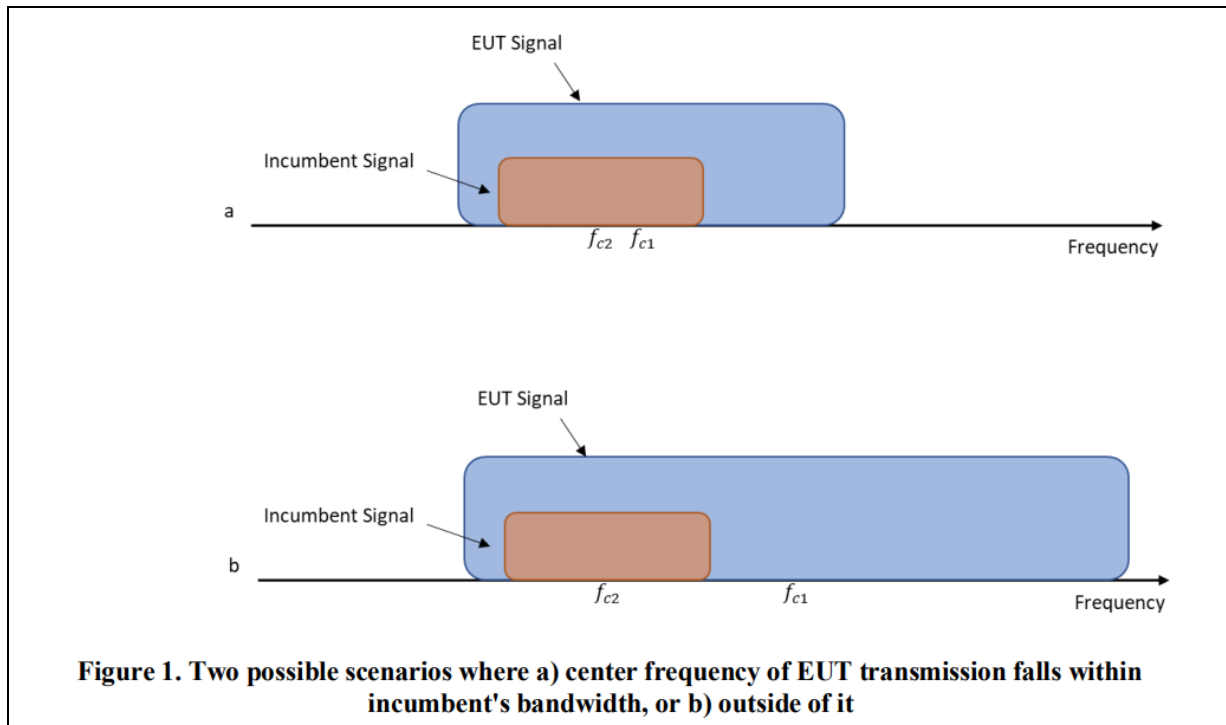

3.5.2 Measuring Instruments

See list of measuring equipment of this test report.


3.5.3 Test Procedures

1. To ensure EUT reliably detects an incumbent signal in both scenarios shown in Figure 1, the detection threshold test may be repeated more than once with the incumbent signal (having center frequency f_{c2}) tuned to different center frequencies within the UT transmission bandwidth. The criteria specified in Table 1 determines how many times the detection threshold test must be performed
2. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
3. Monitor the signal analyzer to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
4. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
5. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 2, choose a different center

frequency for the AWGN signal and repeat the process.

6. EUT was driven in MIMO mode, the interferer signal was injected to both chains to monitor the performance, while the interferer level is determined according to the lowest antenna gain among both antennas.

3.5.4 Test Setup

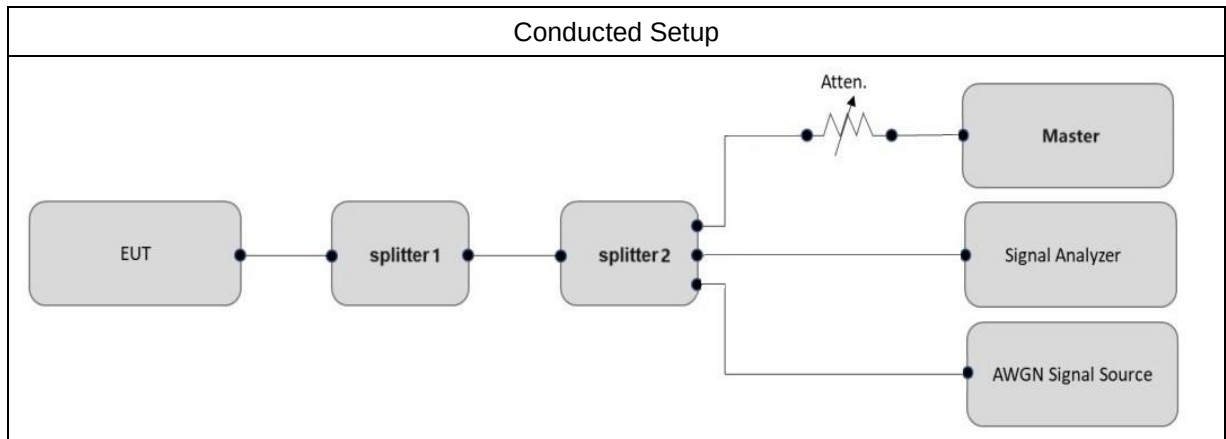

3.5.5 Support Unit used in test configuration and system

Instrument	Brand Name	Model No.	Characteristics
Signal Generator	Keysight	5182B/5182BX07	9KHz~7.2GHz
Spectrum Analyzer	R&S	FSV40	10kHz~40GHz
Terminal (NB Server)	DELL	P78G	LAN
Combiner (splitter1)	Tojoin	N/A	2G~8GHz
Combiner (splitter2)	MTJ Cooperation	MTJ7144-M	0.5GHz~18GHz
Attenuator	Keysight	8494B	0-110dBm
WLAN AP	ASUS	GT-AXE11000	Dual Band AP
WLAN AP	ASUS	RT-BE96U	Dual Band AP

3.5.6 Test Summary of Contention Based Protocol Test

Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 5	6135	20	6135	-67.12	100	-62	-64.02	2.02
				Result: Stop Transmission				
				-68.12	< 90	-62	-65.02	3.02
				Result: Minimal Operation				
				-72.24	0	-62	-69.14	7.14
				Result: Normal Operation				
UNII Band 5	6105	320	5950	-68.78	100	-62	-65.68	3.68
				Result: Stop Transmission				
				-69.78	< 90	-62	-66.68	4.68
				Result: Minimal Operation				
				-71.96	0	-62	-68.86	6.86
				Result: Normal Operation				
			6105	-67.80	100	-62	-64.7	2.7
				Result: Stop Transmission				
				-68.80	< 90	-62	-65.7	3.7
				Result: Minimal Operation				
				-72.81	0	-62	-69.71	7.71
				Result: Normal Operation				
			6260	-69.20	100	-62	-66.1	4.1
				Result: Stop Transmission				
				-70.20	< 90	-62	-67.1	5.1
				Result: Minimal Operation				
				-72.28	0	-62	-69.18	7.18
				Result: Normal Operation				

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna, gain = -3.1dBi)

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 6	6455	20	6455	-67.23	100	-62	-64.13	2.13
					Result: Stop Transmission			
				-68.23	< 90	-62	-65.13	3.13
					Result: Minimal Operation			
				-71.76	0	-62	-68.66	6.66
					Result: Normal Operation			
UNII Band 5/6/7	6425	320	6270	-71.40	100	-62	-68.3	6.3
					Result: Stop Transmission			
				-72.40	< 90	-62	-69.3	7.3
					Result: Minimal Operation			
				-74.21	0	-62	-71.11	9.11
					Result: Normal Operation			
			6425	-67.59	100	-62	-64.49	2.49
					Result: Stop Transmission			
				-68.59	< 90	-62	-65.49	3.49
					Result: Minimal Operation			
				-71.66	0	-62	-68.56	6.56
					Result: Normal Operation			
			6580	-67.76	100	-62	-64.66	2.66
					Result: Stop Transmission			
				-68.76	< 90	-62	-65.66	3.66
					Result: Minimal Operation			
				-72.28	0	-62	-69.18	7.18
					Result: Normal Operation			

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna, gain = -3.1dBi)

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 7	6695	20	6695	-68.00	100	-62	-64.9	2.9
					Result: Stop Transmission			
				-69.00	< 90	-62	-65.9	3.9
					Result: Minimal Operation			
				-73.44	0	-62	-70.34	8.34
					Result: Normal Operation			
UNII Band 6/7	6585	320	6430	-69.57	100	-62	-66.47	4.47
					Result: Stop Transmission			
				-70.57	< 90	-62	-67.47	5.47
					Result: Minimal Operation			
				-73.02	0	-62	-69.92	7.92
					Result: Normal Operation			
			6585	-66.84 (Worse)	100	-62	-63.74	1.74
					Result: Stop Transmission			
				-67.84	< 90	-62	-64.74	2.74
					Result: Minimal Operation			
				-69.64	0	-62	-66.54	4.54
					Result: Normal Operation			
			6740	-71.78	100	-62	-68.68	6.68
					Result: Stop Transmission			
				-72.78	< 90	-62	-69.68	7.68
					Result: Minimal Operation			
				-74.94	0	-62	-71.84	9.84
					Result: Normal Operation			

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna, gain = -3.1dBi)

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power



Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Margin (dB)
UNII Band 8	7015	20	7015	-67.61	100	-62	-64.51	2.51
					Result: Stop Transmission			
				-68.61	< 90	-62	-65.51	3.51
					Result: Minimal Operation			
				-72.44	0	-62	-69.34	7.34
					Result: Normal Operation			
UNII Band 7/8	6905	320	6750	-71.78	100	-62	-68.68	6.68
					Result: Stop Transmission			
				-72.78	< 90	-62	-69.68	7.68
					Result: Minimal Operation			
				-74.22	0	-62	-71.12	9.12
					Result: Normal Operation			
			6905	-67.29	100	-62	-64.19	2.19
					Result: Stop Transmission			
				-68.29	< 90	-62	-65.19	3.19
					Result: Minimal Operation			
				-70.57	0	-62	-67.47	5.47
					Result: Normal Operation			
			7060	-70.08	100	-62	-66.98	4.98
					Result: Stop Transmission			
				-71.08	< 90	-62	-67.98	5.98
					Result: Minimal Operation			
				-72.60	0	-62	-69.5	7.5
					Result: Normal Operation			

Note 1: Adjusted Power = Injected AWGN Level - minimum antenna gain (Antenna, gain = -3.1dBi)

Note 2: Path Loss between antenna and RF connector is negligible. (0 dB)

Note 3: Margin = Regulated Threshold level - Adjusted Power




3.5.7 Worst Case Plots of Contention Based Protocol

Contention Based Protocol Result Plots on U-NII 6/7 (AWGN Interference)


802.11be (EHT320) / 6585MHz (Middle)

Threshold Level (TL) = -66.84 dBm

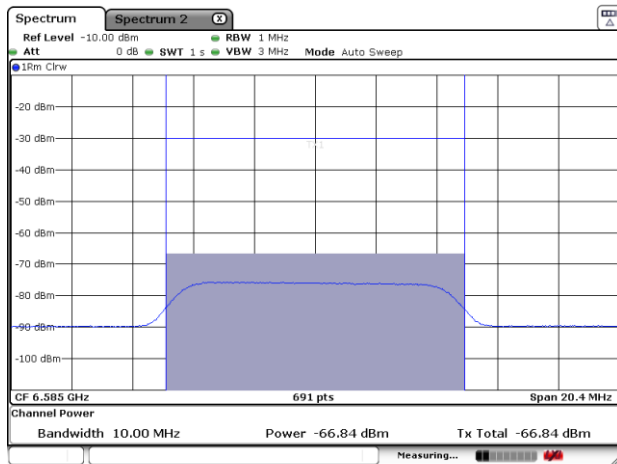


802.11be (EHT320) / CH127 (Middle)

Test result is pass due to no transmission occur.

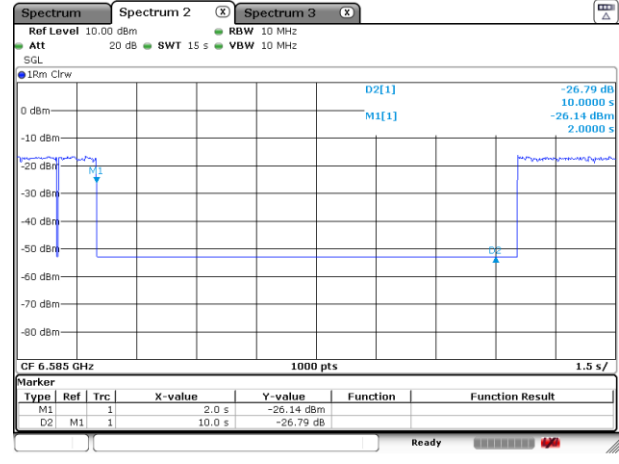


802.11be (EHT320) / 6585MHz (Middle)

Threshold Level (TL) = -67.84 dBm

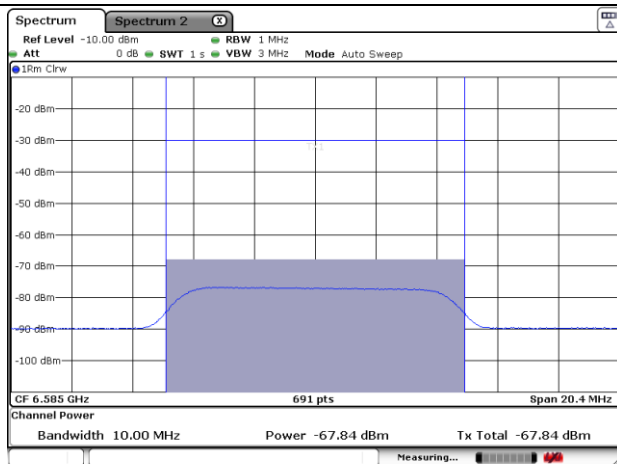

802.11be (EHT320) / CH127 (Middle)

Transmit when the interferer is 1dB lower.

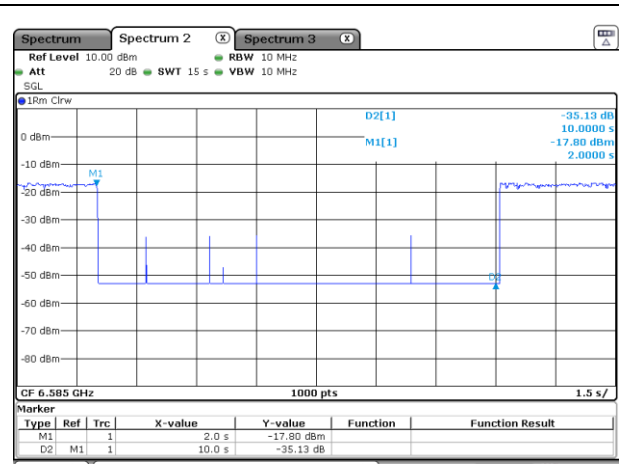


Remark: M1: Injection of AWGN signal, D1: Removal of AWGN signal



3.5.8 Worst Case of Contention Based Protocol Transmission Bandwidth

Verify transmission absence when Incumbent signal at different frequency (frequency domain plots).

1. When Incumbent Signal inject at lowest frequency, the transmission bandwidth reduced to 160MHz;
2. When Incumbent Signal inject at middle frequency, the whole 320MHz bandwidth stop transmission;
3. When Incumbent Signal inject at highest frequency, the transmission bandwidth reduced to 80MHz;

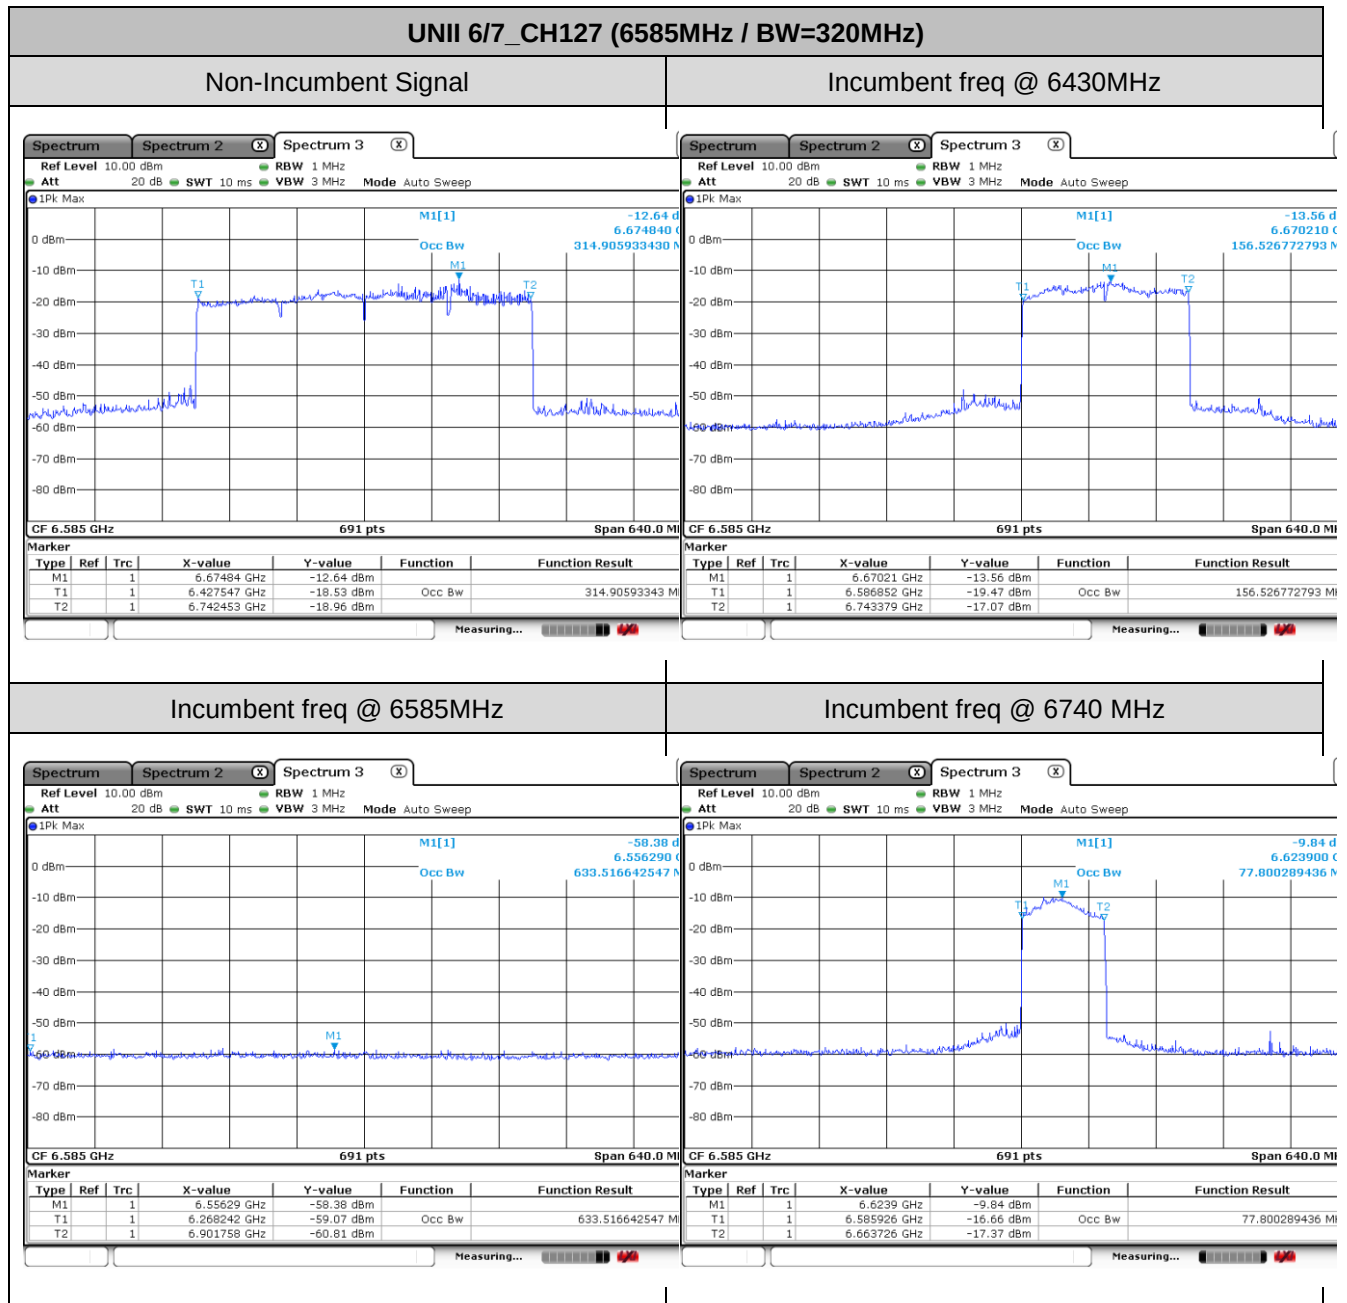

3.6 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.6.1 Limit of Unwanted Emissions

- (1) For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz.

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27 (RMS)	68.2
- 7 (Peak)	88.2

Unwanted emissions outside of restricted bands are measured with a RMS detector.

In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

3.6.2 Measuring Instruments


See list of measuring equipment of this test report.

3.6.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.6.4 Test Setup


For radiated emissions below 30MHz

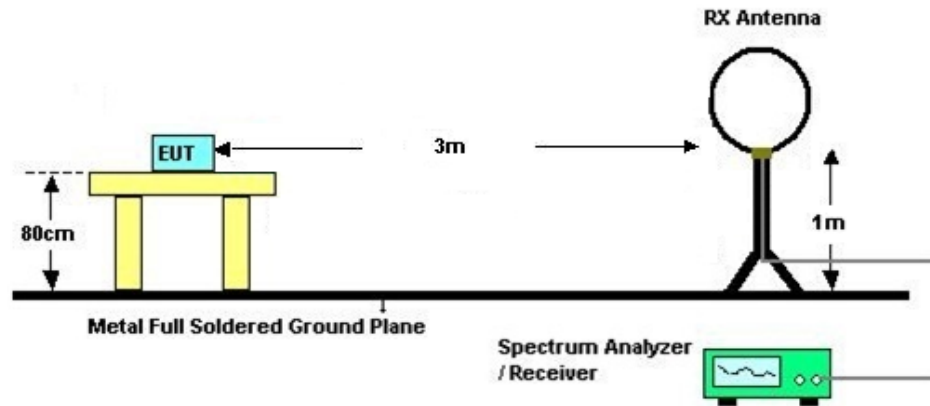

For radiated emissions from 30MHz to 1GHz

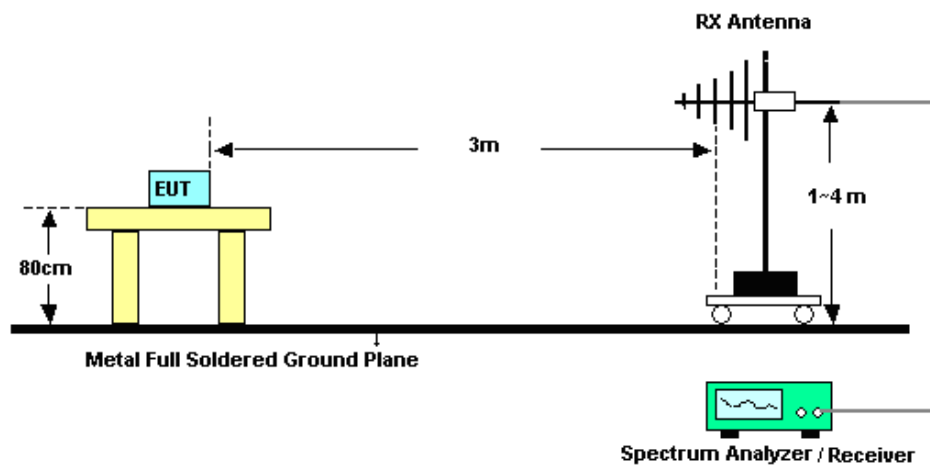

For radiated emissions above 1GHz

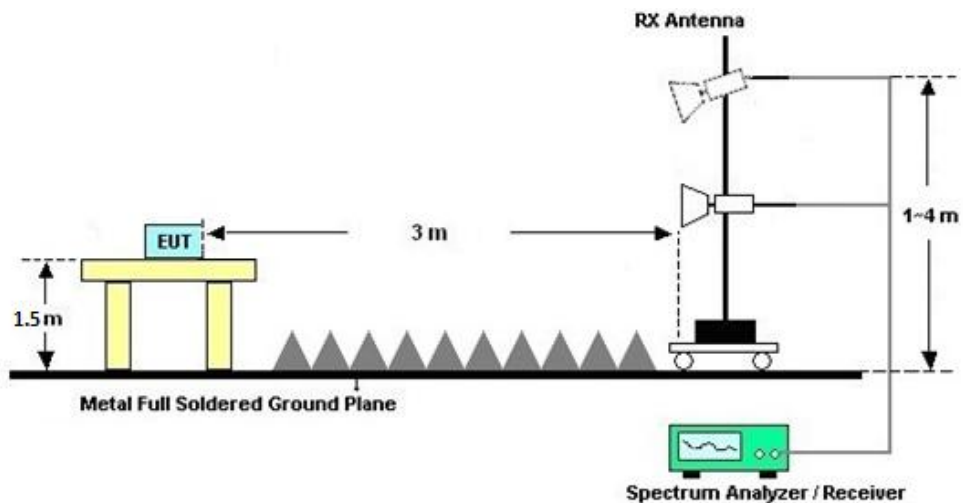



3.6.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.6.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C

3.6.7 Duty Cycle

Please refer to Appendix D.

3.6.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

The emission level above 18GHz is checked that the emission level is noise floor only, so it is not reflected in the report.

3.7 AC Conducted Emission Measurement

3.7.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.7.2 Measuring Instruments

See list of measuring equipment of this test report.

3.7.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.7.4 Test Setup

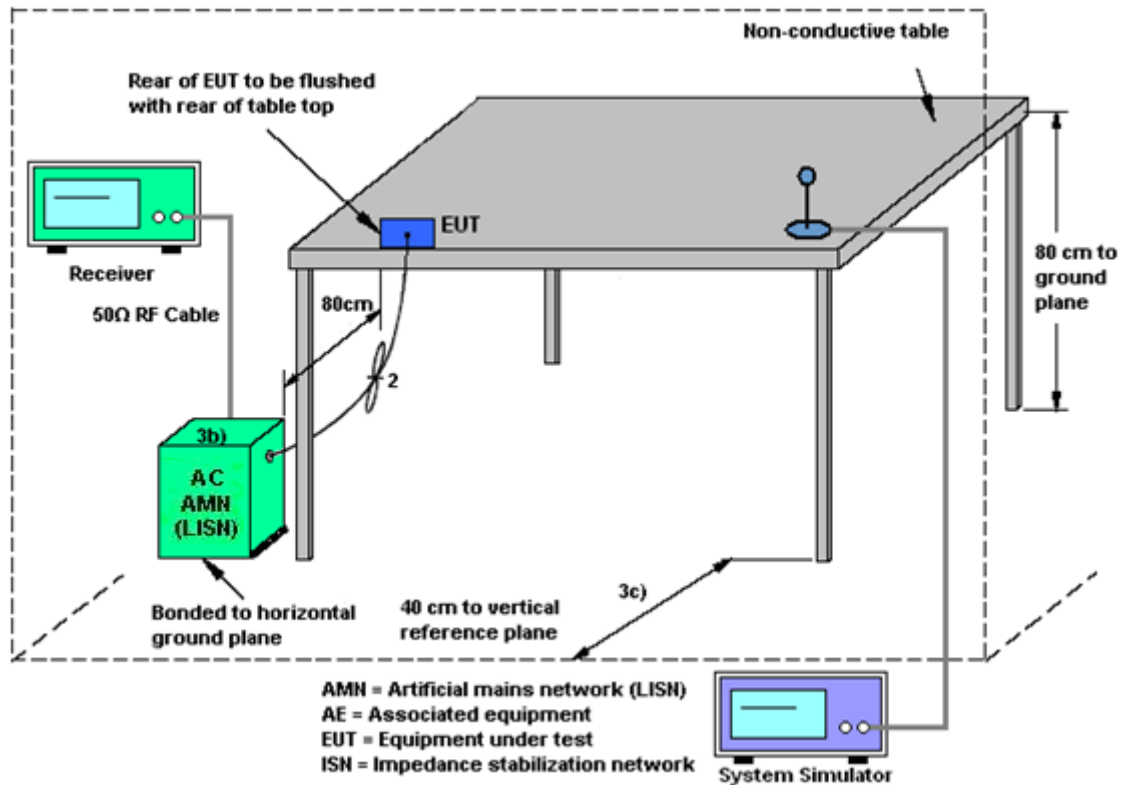

3.7.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.8 Antenna Requirements

3.8.1 Standard Applicable

§15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used. The EUT complies with the requirement of 15.203.

3.8.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

For power, the directional gain G_{ANT} is set equal to the antenna having the highest gain, i.e.,

Directional gain = $G_{ANT\ MAX}(Ant.1\ Gain, Ant.2\ Gain, \dots) + \text{Array Gain}$, as following table for Power, where Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

For PSD, the directional gain calculation is following,

Directional gain = $10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_n/20})^2 / N_{ANT}]$ dBi, as following table for PSD.

N_{ANT} = number of transmit antennas

N_{SS} = number of spatial streams. (The worst case directional gain will occur when $N_{SS} = 1$)

<CDD Modes>				
			DG for Power (dBi)	DG for PSD (dBi)
	Ant. 6 (dBi)	Ant. 13 (dBi)		
U-NII-5	-3.10	-3.10	-3.10	-0.09
U-NII-6	-2.80	-2.80	-2.80	0.21
U-NII-7	-2.50	-2.50	-2.50	0.51
U-NII-8	-2.40	-2.40	-2.40	0.61



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Jul. 07, 2025	Dec. 28, 2025~ Jan. 24, 2026	Jul. 06, 2026	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Dec. 25, 2025	Dec. 28, 2025~ Jan. 24, 2026	Dec. 24, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Dec. 25, 2025	Dec. 28, 2025~ Jan. 24, 2026	Dec. 24, 2026	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY572901 51	3Hz~8.5GHz;Max 30dBm	Jul. 02, 2025	Jan. 24, 2026	Jul. 01, 2026	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY602421 26	10Hz~44G,MAX 30dB	Oct. 10, 2025	Jan. 24, 2026	Oct. 10, 2026	Radiation (03CH05-KS)
Active loop antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Aug. 10, 2025	Jan. 24, 2026	Aug. 09, 2026	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	Mar. 24, 2025	Jan. 24, 2026	Mar. 23, 2026	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 14, 2025	Jan. 24, 2026	Apr. 13, 2026	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Oct. 18, 2025	Jan. 24, 2026	Oct. 19, 2026	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380827	9KHz~1GHz	Jul. 03, 2025	Jan. 24, 2026	Jul. 02, 2026	Radiation (03CH05-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Dec. 26, 2025	Jan. 24, 2026	Dec.25 , 2026	Radiation (03CH05-KS)
high gain Amplifier	EM	EM01G18GA	060843	1Ghz~18Ghz	Dec. 25, 2025	Jan. 24, 2026	Dec.24 , 2026	Radiation (03CH05-KS)
Amplifier	EM	EM01G18GA	060833	1Ghz~18Ghz	Dec. 25, 2025	Jan. 24, 2026	Dec.24 , 2026	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Jan. 24, 2026	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jan. 24, 2026	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jan. 24, 2026	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 16, 2025	Jan. 20, 2026	Apr. 15, 2026	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Jul. 03, 2025	Jan. 20, 2026	Jul. 02, 2026	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Dec. 24, 2024	Jan. 20, 2026	Dec. 23, 2025	Conduction (CO01-KS)
AC Power Source	Ouhan	APW-130NYT	20220104 0060	AC 0V~300V,45Hz~ 1000Hz	Apr. 16, 2025	Jan. 20, 2026	Apr. 15, 2026	Conduction (CO01-KS)
Signal Analyzer	R&S	FSV7	101472	10Hz~7GHz	Aug. 26, 2025	Jan. 19, 2026	Aug. 25, 2026	CBP (DFS01-KS)
MXG-B RF Vector Signal Generator	Keysight	5182B /5182BX07	MY562004 17 /MY59360 210	9kHz~7.2GHz	Apr. 16, 2025	Jan. 19, 2026	Apr. 15, 2026	CBP (DFS01-KS)
Vector Signal Generator	R&S	SMJ100A	101908	100kHz~6GHz	Dec. 24, 2025	Jan. 19, 2026	Dec. 23, 2026	CBP (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Jan. 19, 2026	NCR	CBP (DFS01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.00 dB
Occupied Channel Bandwidth	±0.384%
Conducted Power	±0.90 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.38 Hz
Conducted Generated signal Levels	±0.56 dB
Conducted Time	0.44%

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.84dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.3dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.18dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.88dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.36dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

TEST RESULTS DATA														
Average Output Power														
Mode							Power Setting	Average Conducted Power with duty factor(dBm)			Gain(dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass/Fail
Band	MIMO	N _{TX}	Channel	Freq (MHz)	Data Rate	RU Config		Ant 6	Ant 13	Ant 6+13	Ant 6+13	Ant 6+13	Ant 6+13	
HE20	CDD	2	1	5955	MCS0	Full	6.00	6.06	7.03	9.58	-3.10	6.48	24	Pass
HE20	CDD	2	1	5955	MCS0	RU 26/0	-3.00	-2.95	-1.68	0.74	-3.10	-2.36	24	Pass
HE20	CDD	2	1	5955	MCS0	RU 52/37	0.00	0.31	1.15	3.76	-3.10	0.66	24	Pass
HE20	CDD	2	1	5955	MCS0	RU 106/53	3.00	3.08	3.95	6.55	-3.10	3.45	24	Pass
HE20	CDD	2	49	6195	MCS0	Full	5.50	5.58	5.92	8.77	-3.10	5.67	24	Pass
HE20	CDD	2	93	6415	MCS0	Full	6.00	5.49	6.23	8.89	-3.10	5.79	24	Pass
HE40	CDD	2	3	5965	MCS0	Full	8.00	8.91	9.16	12.05	-3.10	8.95	24	Pass
HE40	CDD	2	51	6205	MCS0	Full	8.50	8.62	8.85	11.75	-3.10	8.65	24	Pass
HE40	CDD	2	91	6405	MCS0	Full	8.50	8.20	8.76	11.50	-3.10	8.40	24	Pass
HE80	CDD	2	7	5985	MCS0	Full	11.00	11.11	11.89	14.53	-3.10	11.43	24	Pass
HE80	CDD	2	55	6225	MCS0	Full	10.50	11.07	11.24	14.17	-3.10	11.07	24	Pass
HE80	CDD	2	87	6385	MCS0	Full	11.50	11.77	11.99	14.89	-3.10	11.79	24	Pass
HE160	CDD	2	15	6025	MCS0	Full	14.00	13.89	14.73	17.34	-3.10	14.24	24	Pass
HE160	CDD	2	47	6185	MCS0	Full	12.50	12.88	12.84	15.87	-3.10	12.77	24	Pass
HE160	CDD	2	79	6345	MCS0	Full	13.50	13.27	13.88	16.60	-3.10	13.50	24	Pass
EHT20	CDD	2	1	5955	MCS0	Full	6.00	6.07	7.05	9.60	-3.10	6.50	24	Pass
EHT20	CDD	2	1	5955	MCS0	RU 26/0	-3.00	-2.91	-1.64	0.78	-3.10	-2.32	24	Pass
EHT20	CDD	2	1	5955	MCS0	RU 52/37	0.00	0.34	1.20	3.80	-3.10	0.70	24	Pass
EHT20	CDD	2	1	5955	MCS0	RU 106/53	3.00	3.16	4.02	6.62	-3.10	3.52	24	Pass
EHT20	CDD	2	1	5955	MCS0	RU 52+26	0.00	0.22	1.01	3.65	-3.10	0.55	24	Pass
EHT20	CDD	2	1	5955	MCS0	RU 106+26	3.00	3.07	3.92	6.52	-3.10	3.42	24	Pass
EHT20	CDD	2	49	6195	MCS0	Full	5.50	5.61	5.95	8.79	-3.10	5.69	24	Pass
EHT20	CDD	2	93	6415	MCS0	Full	6.00	5.51	6.26	8.91	-3.10	5.81	24	Pass
EHT40	CDD	2	3	5965	MCS0	Full	8.00	8.95	9.22	12.09	-3.10	8.99	24	Pass
EHT40	CDD	2	51	6205	MCS0	Full	8.50	8.66	8.89	11.78	-3.10	8.68	24	Pass
EHT40	CDD	2	91	6405	MCS0	Full	8.50	8.23	8.80	11.53	-3.10	8.43	24	Pass
EHT80	CDD	2	7	5985	MCS0	Full	11.00	11.13	11.92	14.56	-3.10	11.46	24	Pass
EHT80	CDD	2	7	5985	MCS0	PC 20,Loc:4	9.50	9.88	10.47	13.20	-3.10	10.10	24	Pass
EHT80	CDD	2	7	5985	MCS0	Large 484+242,Loc:4	9.50	10.09	10.68	13.41	-3.10	10.31	24	Pass
EHT80	CDD	2	55	6225	MCS0	Full	10.50	11.10	11.29	14.21	-3.10	11.11	24	Pass
EHT80	CDD	2	87	6385	MCS0	Full	11.50	11.83	12.02	14.94	-3.10	11.84	24	Pass
EHT160	CDD	2	15	6025	MCS0	Full	14.00	13.92	14.79	17.39	-3.10	14.29	24	Pass
EHT160	CDD	2	15	6025	MCS0	PC 20,Loc:8	12.50	12.82	13.28	16.07	-3.10	12.97	24	Pass
EHT160	CDD	2	15	6025	MCS0	PC 40,Loc:4	12.00	12.35	12.77	15.58	-3.10	12.48	24	Pass
EHT160	CDD	2	15	6025	MCS0	Large 996+484,Loc:4	12.00	12.43	12.99	15.72	-3.10	12.62	24	Pass
EHT160	CDD	2	47	6185	MCS0	Full	12.50	12.90	12.87	15.90	-3.10	12.80	24	Pass
EHT160	CDD	2	79	6345	MCS0	Full	13.50	13.30	13.92	16.63	-3.10	13.53	24	Pass
EHT320	CDD	2	31	6105	MCS0	Full	14.00	14.44	14.60	17.53	-3.10	14.43	24	Pass
EHT320	CDD	2	31	6105	MCS0	PC 40,Loc:8	13.00	13.46	13.43	16.46	-3.10	13.36	24	Pass
EHT320	CDD	2	31	6105	MCS0	PC 80,Loc:4	12.50	13.12	13.07	16.10	-3.10	13.00	24	Pass
EHT320	CDD	2	31	6105	MCS0	PC 80+40,Loc:5	11.50	12.16	12.27	15.22	-3.10	12.12	24	Pass
EHT320	CDD	2	31	6105	MCS0	Large 996*3+484,Loc:8	13.50	13.74	13.98	16.87	-3.10	13.77	24	Pass
EHT320	CDD	2	31	6105	MCS0	Large 996*3,Loc:4	13.00	13.21	13.46	16.35	-3.10	13.25	24	Pass
EHT320	CDD	2	31	6105	MCS0	Large 996*2+484,Loc:6	12.00	12.53	12.63	15.59	-3.10	12.49	24	Pass
EHT320	CDD	2	63	6265	MCS0	Full	14.00	13.41	13.96	16.71	-3.10	13.61	24	Pass
EHT320	CDD	2	95	6425	MCS0	Full	14.00	14.15	14.36	17.27	-3.10	14.17	24	Pass

TEST RESULTS DATA														
Average Output Power														
Mode							Power Setting	Average Conducted Power with duty factor(dBm)			Gain(dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass/Fail
Band	MIMO	N _{TX}	Channel	Freq (MHz)	Data Rate	RU Config		Ant 6	Ant 13	Ant 6+13	Ant 6+13	Ant 6+13	Ant 6+13	
HE20	CDD	2	97	6435	MCS0	Full	5.50	5.34	5.98	8.68	-2.80	5.88	24	Pass
HE20	CDD	2	97	6435	MCS0	RU 26/0	-3.50	-3.81	-2.82	-0.28	-2.80	-3.08	24	Pass
HE20	CDD	2	97	6435	MCS0	RU 52/37	-0.50	-0.50	0.30	2.93	-2.80	0.13	24	Pass
HE20	CDD	2	97	6435	MCS0	RU 106/53	2.50	2.43	3.01	5.74	-2.80	2.94	24	Pass
HE20	CDD	2	105	6475	MCS0	Full	6.00	5.75	6.14	8.96	-2.80	6.16	24	Pass
HE20	CDD	2	113	6515	MCS0	Full	5.50	4.76	5.90	8.38	-2.80	5.58	24	Pass
HE40	CDD	2	99	6445	MCS0	Full	8.00	8.02	8.20	11.12	-2.80	8.32	24	Pass
HE40	CDD	2	107	6485	MCS0	Full	8.00	7.92	8.28	11.12	-2.80	8.32	24	Pass
HE40	CDD	2	115	6525	MCS0	Full	8.00	7.44	8.35	10.93	-2.80	8.13	24	Pass
HE80	CDD	2	103	6465	MCS0	Full	11.00	11.39	11.56	14.49	-2.80	11.69	24	Pass
HE80	CDD	2	119	6545	MCS0	Full	10.50	10.64	11.34	14.02	-2.80	11.22	24	Pass
HE160	CDD	2	111	6505	MCS0	Full	13.00	12.84	13.57	16.23	-2.80	13.43	24	Pass
EHT20	CDD	2	97	6435	MCS0	Full	5.50	5.38	6.02	8.72	-2.80	5.92	24	Pass
EHT20	CDD	2	97	6435	MCS0	RU 26/0	-3.50	-3.77	-2.79	-0.24	-2.80	-3.04	24	Pass
EHT20	CDD	2	97	6435	MCS0	RU 52/37	-0.50	-0.46	0.34	2.97	-2.80	0.17	24	Pass
EHT20	CDD	2	97	6435	MCS0	RU 106/53	2.50	2.49	3.03	5.78	-2.80	2.98	24	Pass
EHT20	CDD	2	97	6435	MCS0	RU 52+26	-0.50	-0.67	0.34	2.88	-2.80	0.08	24	Pass
EHT20	CDD	2	97	6435	MCS0	RU 106+26	2.50	2.48	2.96	5.74	-2.80	2.94	24	Pass
EHT20	CDD	2	105	6475	MCS0	Full	6.00	5.80	6.15	8.99	-2.80	6.19	24	Pass
EHT20	CDD	2	113	6515	MCS0	Full	5.50	4.78	5.91	8.39	-2.80	5.59	24	Pass
EHT40	CDD	2	99	6445	MCS0	Full	8.00	8.08	8.25	11.17	-2.80	8.37	24	Pass
EHT40	CDD	2	107	6485	MCS0	Full	8.00	7.96	8.34	11.16	-2.80	8.36	24	Pass
EHT40	CDD	2	115	6525	MCS0	Full	8.00	7.49	8.43	10.99	-2.80	8.19	24	Pass
EHT80	CDD	2	103	6465	MCS0	Full	11.00	11.42	11.60	14.53	-2.80	11.73	24	Pass
EHT80	CDD	2	119	6545	MCS0	Full	10.50	10.68	11.38	14.06	-2.80	11.26	24	Pass
EHT160	CDD	2	111	6505	MCS0	Full	13.00	12.89	13.64	16.29	-2.80	13.49	24	Pass
EHT320	CDD	2	127	6585	MCS0	Full	14.00	13.80	14.41	17.13	-2.80	14.33	24	Pass

TEST RESULTS DATA														
Average Output Power														
Mode							Power Setting	Average Conducted Power with duty factor(dBm)			Gain(dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass/Fail
Band	MIMO	N _{TX}	Channel	Freq (MHz)	Data Rate	RU Config		Ant 6	Ant 13	Ant 6+13	Ant 6+13	Ant 6+13	Ant 6+13	
HE20	CDD	2	117	6535	MCS0	Full	5.50	4.70	5.78	8.29	-2.50	5.79	24	Pass
HE20	CDD	2	117	6535	MCS0	RU 26/0	-3.50	-4.40	-3.42	-0.87	-2.50	-3.37	24	Pass
HE20	CDD	2	117	6535	MCS0	RU 52/37	-0.50	-1.21	-0.28	2.29	-2.50	-0.21	24	Pass
HE20	CDD	2	117	6535	MCS0	RU 106/53	2.50	1.86	2.72	5.32	-2.50	2.82	24	Pass
HE20	CDD	2	149	6695	MCS0	Full	5.50	4.73	5.54	8.17	-2.50	5.67	24	Pass
HE20	CDD	2	181	6855	MCS0	Full	5.00	4.98	5.43	8.22	-2.50	5.72	24	Pass
HE20	CDD	2	185	6875	MCS0	Full	5.00	5.07	5.45	8.28	-2.50	5.78	24	Pass
HE40	CDD	2	123	6565	MCS0	Full	8.00	7.58	8.34	10.99	-2.50	8.49	24	Pass
HE40	CDD	2	147	6685	MCS0	Full	8.50	7.73	8.30	11.04	-2.50	8.54	24	Pass
HE40	CDD	2	179	6845	MCS0	Full	8.00	7.84	8.22	11.05	-2.50	8.55	24	Pass
HE40	CDD	2	187	6885	MCS0	Full	8.00	7.98	8.38	11.20	-2.50	8.70	24	Pass
HE80	CDD	2	135	6625	MCS0	Full	10.50	10.51	11.36	13.97	-2.50	11.47	24	Pass
HE80	CDD	2	151	6705	MCS0	Full	10.50	10.73	11.07	13.91	-2.50	11.41	24	Pass
HE80	CDD	2	167	6785	MCS0	Full	10.50	10.72	11.18	13.97	-2.50	11.47	24	Pass
HE80	CDD	2	183	6865	MCS0	Full	10.00	10.61	10.45	13.54	-2.50	11.04	24	Pass
HE160	CDD	2	143	6665	MCS0	Full	13.50	12.75	13.59	16.20	-2.50	13.70	24	Pass
HE160	CDD	2	175	6825	MCS0	Full	12.50	12.92	13.23	16.09	-2.50	13.59	24	Pass
EHT20	CDD	2	117	6535	MCS0	Full	5.50	4.73	5.81	8.31	-2.50	5.81	24	Pass
EHT20	CDD	2	117	6535	MCS0	RU 26/0	-3.50	-4.37	-3.38	-0.83	-2.50	-3.33	24	Pass
EHT20	CDD	2	117	6535	MCS0	RU 52/37	-0.50	-1.18	-0.26	2.31	-2.50	-0.19	24	Pass
EHT20	CDD	2	117	6535	MCS0	RU 106/53	2.50	1.93	2.76	5.37	-2.50	2.87	24	Pass
EHT20	CDD	2	117	6535	MCS0	RU 52+26	-0.50	-1.27	-0.47	2.16	-2.50	-0.34	24	Pass
EHT20	CDD	2	117	6535	MCS0	RU 106+26	2.50	1.96	2.57	5.28	-2.50	2.78	24	Pass
EHT20	CDD	2	149	6695	MCS0	Full	5.50	4.75	5.56	8.19	-2.50	5.69	24	Pass
EHT20	CDD	2	181	6855	MCS0	Full	5.00	5.01	5.45	8.25	-2.50	5.75	24	Pass
EHT20	CDD	2	185	6875	MCS0	Full	5.00	5.11	5.47	8.30	-2.50	5.80	24	Pass
EHT40	CDD	2	123	6565	MCS0	Full	8.00	7.63	8.38	11.03	-2.50	8.53	24	Pass
EHT40	CDD	2	147	6685	MCS0	Full	8.50	7.79	8.33	11.08	-2.50	8.58	24	Pass
EHT40	CDD	2	179	6845	MCS0	Full	8.00	7.88	8.24	11.07	-2.50	8.57	24	Pass
EHT40	CDD	2	187	6885	MCS0	Full	8.00	8.02	8.44	11.24	-2.50	8.74	24	Pass
EHT80	CDD	2	135	6625	MCS0	Full	10.50	10.53	11.41	14.01	-2.50	11.51	24	Pass
EHT80	CDD	2	151	6705	MCS0	Full	10.50	10.77	11.11	13.95	-2.50	11.45	24	Pass
EHT80	CDD	2	167	6785	MCS0	Full	10.50	10.75	11.20	14.00	-2.50	11.50	24	Pass
EHT80	CDD	2	183	6865	MCS0	Full	10.00	10.64	10.50	13.58	-2.50	11.08	24	Pass
EHT160	CDD	2	143	6665	MCS0	Full	13.50	12.78	13.61	16.23	-2.50	13.73	24	Pass
EHT160	CDD	2	175	6825	MCS0	Full	12.50	12.97	13.26	16.13	-2.50	13.63	24	Pass
EHT320	CDD	2	159	6745	MCS0	Full	14.00	13.62	14.40	17.04	-2.50	14.54	24	Pass

TEST RESULTS DATA														
Average Output Power														
Mode							Power Setting	Average Conducted Power with duty factor(dBm)			Gain(dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass/Fail
Band	MIMO	N _{TX}	Channel	Freq (MHz)	Data Rate	RU Config		Ant 6	Ant 13	Ant 6+13	Ant 6+13	Ant 6+13	Ant 6+13	
HE20	CDD	2	189	6895	MCS0	Full	4.50	4.62	4.75	7.70	-2.40	5.30	24	Pass
HE20	CDD	2	209	6995	MCS0	Full	5.00	4.69	5.56	8.16	-2.40	5.76	24	Pass
HE20	CDD	2	229	7095	MCS0	Full	5.50	5.43	5.82	8.64	-2.40	6.24	24	Pass
HE20	CDD	2	229	7095	MCS0	RU 26/8	-3.50	-4.51	-4.44	-1.47	-2.40	-3.87	24	Pass
HE20	CDD	2	229	7095	MCS0	RU 52/40	-0.50	-1.31	-1.25	1.73	-2.40	-0.67	24	Pass
HE20	CDD	2	229	7095	MCS0	RU 106/54	3.00	2.19	2.51	5.36	-2.40	2.96	24	Pass
HE40	CDD	2	195	6925	MCS0	Full	7.50	7.84	7.74	10.80	-2.40	8.40	24	Pass
HE40	CDD	2	211	7005	MCS0	Full	8.00	7.75	8.38	11.09	-2.40	8.69	24	Pass
HE40	CDD	2	227	7085	MCS0	Full	8.50	8.40	8.93	11.69	-2.40	9.29	24	Pass
HE80	CDD	2	199	6945	MCS0	Full	10.00	10.87	10.07	13.50	-2.40	11.10	24	Pass
HE80	CDD	2	215	7025	MCS0	Full	10.00	10.82	10.38	13.62	-2.40	11.22	24	Pass
HE160	CDD	2	207	6985	MCS0	Full	12.50	13.01	13.26	16.15	-2.40	13.75	24	Pass
EHT20	CDD	2	189	6895	MCS0	Full	4.50	4.63	4.76	7.71	-2.40	5.31	24	Pass
EHT20	CDD	2	209	6995	MCS0	Full	5.00	4.70	5.60	8.18	-2.40	5.78	24	Pass
EHT20	CDD	2	229	7095	MCS0	Full	5.50	5.43	5.84	8.65	-2.40	6.25	24	Pass
EHT20	CDD	2	229	7095	MCS0	RU 26/8	-3.50	-4.48	-4.40	-1.43	-2.40	-3.83	24	Pass
EHT20	CDD	2	229	7095	MCS0	RU 52/40	-0.50	-1.28	-1.20	1.77	-2.40	-0.63	24	Pass
EHT20	CDD	2	229	7095	MCS0	RU 106/54	3.00	2.25	2.55	5.41	-2.40	3.01	24	Pass
EHT20	CDD	2	229	7095	MCS0	RU 52+26	-0.50	-1.41	-1.63	1.49	-2.40	-0.91	24	Pass
EHT20	CDD	2	229	7095	MCS0	RU 106+26	3.00	1.92	2.26	5.10	-2.40	2.70	24	Pass
EHT40	CDD	2	195	6925	MCS0	Full	7.50	7.89	7.78	10.84	-2.40	8.44	24	Pass
EHT40	CDD	2	211	7005	MCS0	Full	8.00	7.79	8.42	11.12	-2.40	8.72	24	Pass
EHT40	CDD	2	227	7085	MCS0	Full	8.50	8.45	8.96	11.72	-2.40	9.32	24	Pass
EHT80	CDD	2	199	6945	MCS0	Full	10.00	10.90	10.11	13.54	-2.40	11.14	24	Pass
EHT80	CDD	2	215	7025	MCS0	Full	10.00	10.84	10.41	13.64	-2.40	11.24	24	Pass
EHT80	CDD	2	215	7025	MCS0	PC 20,Loc:1	9.00	9.36	8.74	12.08	-2.40	9.68	24	Pass
EHT80	CDD	2	215	7025	MCS0	Large 484+242,Loc:2	9.00	9.42	8.42	11.96	-2.40	9.56	24	Pass
EHT160	CDD	2	207	6985	MCS0	Full	12.50	13.05	13.29	16.19	-2.40	13.79	24	Pass
EHT160	CDD	2	207	6985	MCS0	PC 20,Loc:1	11.50	12.04	11.95	15.01	-2.40	12.61	24	Pass
EHT160	CDD	2	207	6985	MCS0	PC 40,Loc:1	10.50	11.09	11.10	14.11	-2.40	11.71	24	Pass
EHT160	CDD	2	207	6985	MCS0	Large 996+484,Loc:3	10.00	10.83	10.72	13.78	-2.40	11.38	24	Pass
EHT320	CDD	2	191	6905	MCS0	Full	14.00	14.55	14.06	17.32	-2.40	14.92	24	Pass
EHT320	CDD	2	191	6905	MCS0	PC 40,Loc:1	13.00	13.88	12.93	16.44	-2.40	14.04	24	Pass
EHT320	CDD	2	191	6905	MCS0	PC 80,Loc:1	12.50	13.10	12.25	15.70	-2.40	13.30	24	Pass
EHT320	CDD	2	191	6905	MCS0	PC 80+40,Loc:8	11.50	12.03	11.13	14.61	-2.40	12.21	24	Pass
EHT320	CDD	2	191	6905	MCS0	Large 996*3+484,Loc:8	13.00	13.35	12.59	16.00	-2.40	13.60	24	Pass
EHT320	CDD	2	191	6905	MCS0	Large 996*3,Loc:4	12.50	12.91	12.15	15.56	-2.40	13.16	24	Pass
EHT320	CDD	2	191	6905	MCS0	Large 996*2+484,Loc:6	11.50	12.09	11.55	14.84	-2.40	12.44	24	Pass



Emission Bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11BE320MIMO	Ant6	6105	326.82	5941.59	6268.41	---	---
	Ant13	6105	327.33	5941.59	6268.92	---	---
	Ant6	6265	327.85	6101.08	6428.92	---	---
	Ant13	6265	327.33	6101.59	6428.92	---	---
	Ant6	6425	328.36	6260.56	6588.92	---	---
	Ant13	6425	327.33	6261.08	6588.41	---	---
	Ant6	6585	327.85	6421.08	6748.92	---	---
	Ant13	6585	327.33	6421.59	6748.92	---	---
	Ant6	6745	327.85	6581.59	6909.44	---	---
	Ant13	6745	327.33	6581.59	6908.92	---	---
	Ant6	6905	327.85	6741.08	7068.92	---	---
	Ant13	6905	326.82	6741.59	7068.41	---	---
11BE20MIMO	Ant6	5955	20.14	5944.95	5965.10	320	Pass
	Ant13	5955	20.19	5944.90	5965.10	320	Pass
	Ant6	6195	20.24	6184.81	6205.05	320	Pass
	Ant13	6195	20.10	6184.90	6205.00	320	Pass
	Ant6	6415	20.14	6404.90	6425.05	320	Pass
	Ant13	6415	20.05	6404.95	6425.00	320	Pass
	Ant6	6435	20.14	6424.95	6445.10	320	Pass
	Ant13	6435	20.10	6424.95	6445.05	320	Pass
	Ant6	6475	20.14	6464.90	6485.05	320	Pass
	Ant13	6475	20.19	6464.90	6485.10	320	Pass
	Ant6	6515	20.19	6504.90	6525.10	320	Pass
	Ant13	6515	20.10	6504.95	6525.05	320	Pass
	Ant6	6535	20.19	6524.90	6545.10	320	Pass
	Ant13	6535	20.14	6524.90	6545.05	320	Pass
	Ant6	6695	20.14	6684.95	6705.10	320	Pass
	Ant13	6695	20.19	6684.90	6705.10	320	Pass
	Ant6	6855	20.19	6844.90	6865.10	320	Pass
	Ant13	6855	20.10	6844.90	6865.00	320	Pass
	Ant6	6875	20.14	6864.95	6885.10	320	Pass
	Ant13	6875	20.24	6864.90	6885.14	320	Pass
	Ant6	6895	20.24	6884.90	6905.14	320	Pass
	Ant13	6895	20.24	6884.90	6905.14	320	Pass
	Ant6	6995	20.10	6984.95	7005.05	320	Pass
	Ant13	6995	20.14	6984.90	7005.05	320	Pass
	Ant6	7095	20.10	7084.95	7105.05	320	Pass
	Ant13	7095	20.19	7084.86	7105.05	320	Pass
11BE40MIMO	Ant6	5965	39.43	5945.29	5984.71	320	Pass
	Ant13	5965	39.43	5945.29	5984.71	320	Pass
	Ant6	6205	39.62	6185.19	6224.81	320	Pass
	Ant13	6205	39.43	6185.29	6224.71	320	Pass
	Ant6	6405	39.52	6385.19	6424.71	320	Pass



	Ant13	6405	39.33	6385.38	6424.71	320	Pass
	Ant6	6445	39.43	6425.29	6464.71	320	Pass
	Ant13	6445	39.43	6425.29	6464.71	320	Pass
	Ant6	6485	39.52	6465.29	6504.81	320	Pass
	Ant13	6485	39.52	6465.19	6504.71	320	Pass
	Ant6	6525	39.52	6505.19	6544.71	320	Pass
	Ant13	6525	39.33	6505.29	6544.62	320	Pass
	Ant6	6565	39.52	6545.19	6584.71	320	Pass
	Ant13	6565	39.33	6545.38	6584.71	320	Pass
	Ant6	6685	39.52	6665.29	6704.81	320	Pass
	Ant13	6685	39.62	6665.19	6704.81	320	Pass
	Ant6	6845	39.43	6825.29	6864.71	320	Pass
	Ant13	6845	39.43	6825.19	6864.62	320	Pass
	Ant6	6885	39.90	6865.19	6905.10	320	Pass
	Ant13	6885	39.43	6865.29	6904.71	320	Pass
	Ant6	6925	39.33	6905.38	6944.71	320	Pass
	Ant13	6925	39.43	6905.29	6944.71	320	Pass
	Ant6	7005	39.43	6985.29	7024.71	320	Pass
	Ant13	7005	39.52	6985.19	7024.71	320	Pass
	Ant6	7085	39.43	7065.29	7104.71	320	Pass
	Ant13	7085	39.52	7065.19	7104.71	320	Pass
11BE80MIMO	Ant6	5985	80.15	5944.92	6025.08	320	Pass
	Ant13	5985	79.90	5945.05	6024.95	320	Pass
	Ant6	6225	80.03	6185.05	6265.08	320	Pass
	Ant13	6225	80.15	6184.92	6265.08	320	Pass
	Ant6	6385	80.03	6344.92	6424.95	320	Pass
	Ant13	6385	79.90	6345.05	6424.95	320	Pass
	Ant6	6465	80.15	6424.92	6505.08	320	Pass
	Ant13	6465	80.03	6424.92	6504.95	320	Pass
	Ant6	6545	79.90	6505.05	6584.95	320	Pass
	Ant13	6545	80.15	6504.92	6585.08	320	Pass
	Ant6	6625	80.03	6585.05	6665.08	320	Pass
	Ant13	6625	80.15	6584.92	6665.08	320	Pass
	Ant6	6705	79.90	6665.05	6744.95	320	Pass
	Ant13	6705	80.15	6664.92	6745.08	320	Pass
	Ant6	6785	80.03	6744.92	6824.95	320	Pass
	Ant13	6785	79.90	6745.05	6824.95	320	Pass
	Ant6	6865	80.15	6824.92	6905.08	320	Pass
	Ant13	6865	80.03	6825.05	6905.08	320	Pass
	Ant6	6945	80.15	6904.92	6985.08	320	Pass
	Ant13	6945	79.90	6905.05	6984.95	320	Pass
	Ant6	7025	80.03	6984.92	7064.95	320	Pass
	Ant13	7025	80.03	6984.92	7064.95	320	Pass
11BE160MIMO	Ant6	6025	161.86	5944.07	6105.93	320	Pass
	Ant13	6025	161.60	5944.33	6105.93	320	Pass
	Ant6	6185	161.86	6104.07	6265.93	320	Pass
	Ant13	6185	161.60	6104.33	6265.93	320	Pass
	Ant6	6345	161.86	6264.07	6425.93	320	Pass
	Ant13	6345	161.34	6264.33	6425.67	320	Pass
	Ant6	6505	161.60	6424.33	6585.93	320	Pass




	Ant13	6505	161.34	6424.33	6585.67	320	Pass
	Ant6	6665	161.86	6584.07	6745.93	320	Pass
	Ant13	6665	161.60	6584.07	6745.67	320	Pass
	Ant6	6825	161.60	6744.33	6905.93	320	Pass
	Ant13	6825	161.86	6744.07	6905.93	320	Pass
	Ant6	6985	161.60	6904.07	7065.67	320	Pass
	Ant13	6985	161.34	6904.33	7065.67	320	Pass


Note1: For channels with a nominal bandwidth of 320MHz, compliance is demonstrated by way of the 99%BW.


Note2: For channels with a nominal bandwidth less than 320MHz(e.g 20,40,80,160MHz), compliance is demonstrated by way of the 26dB EBW.






Test Graphs

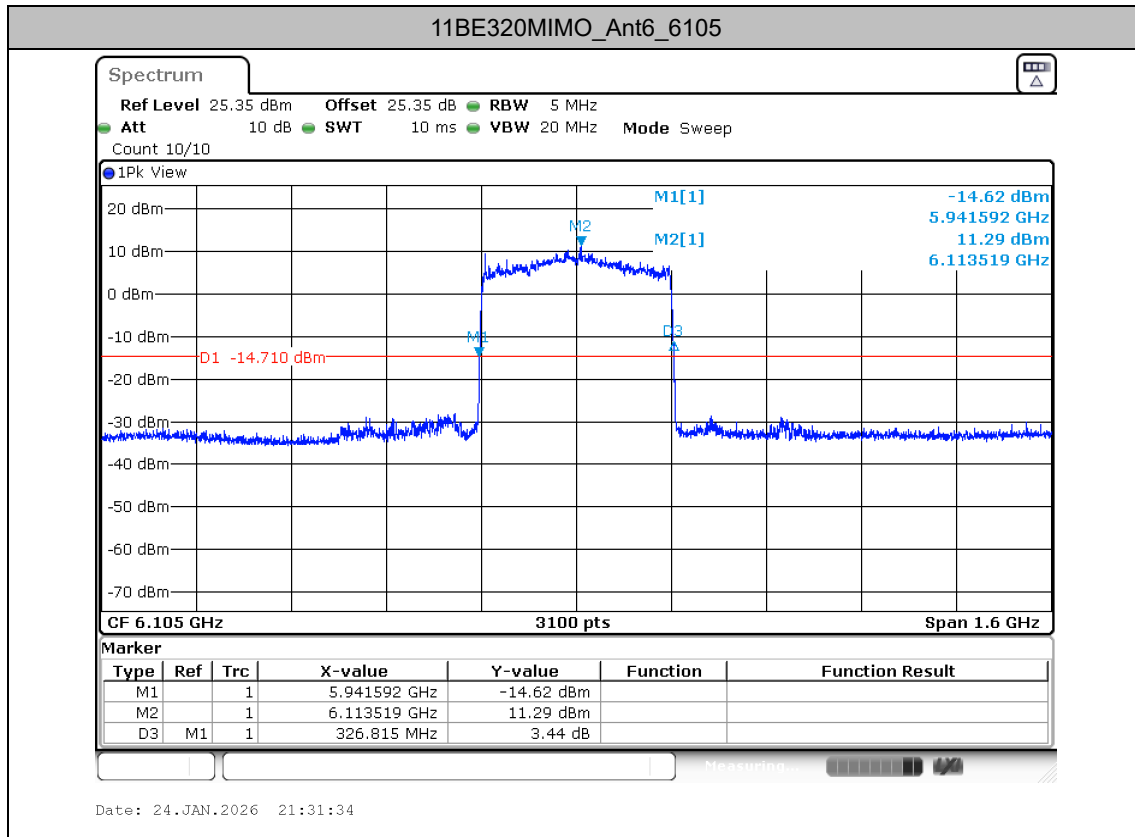


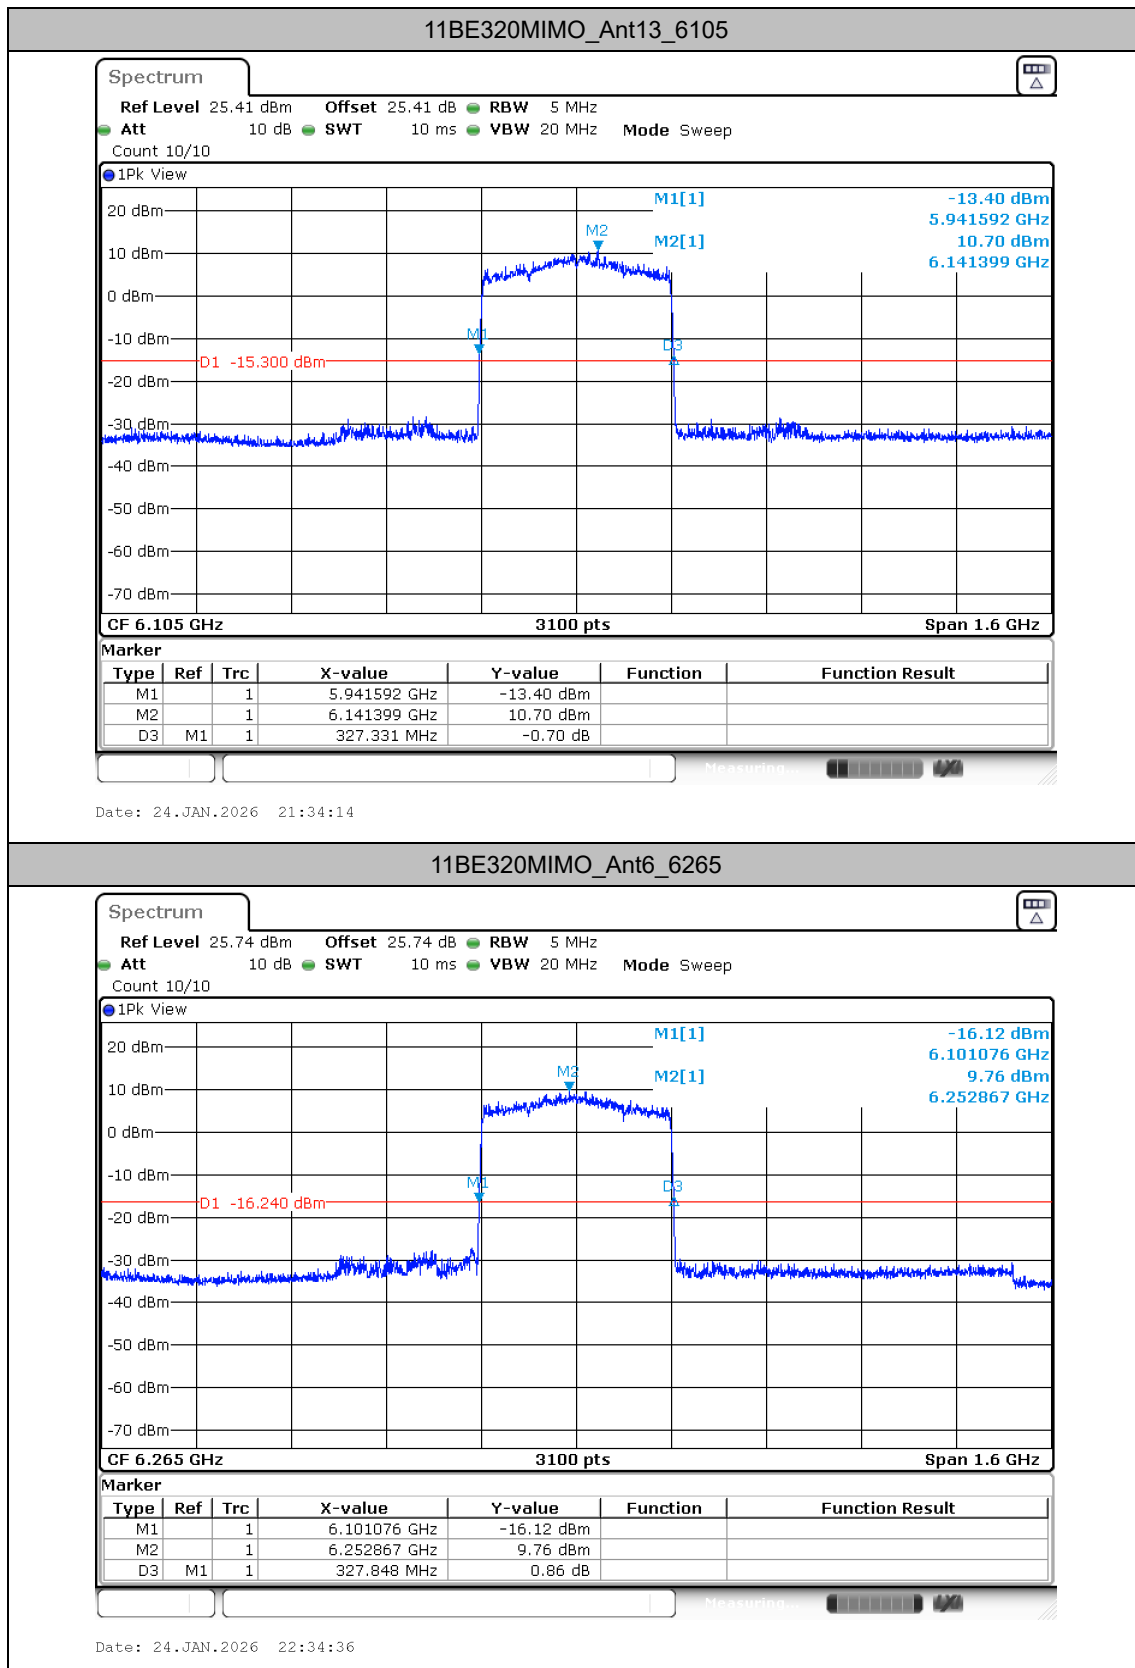



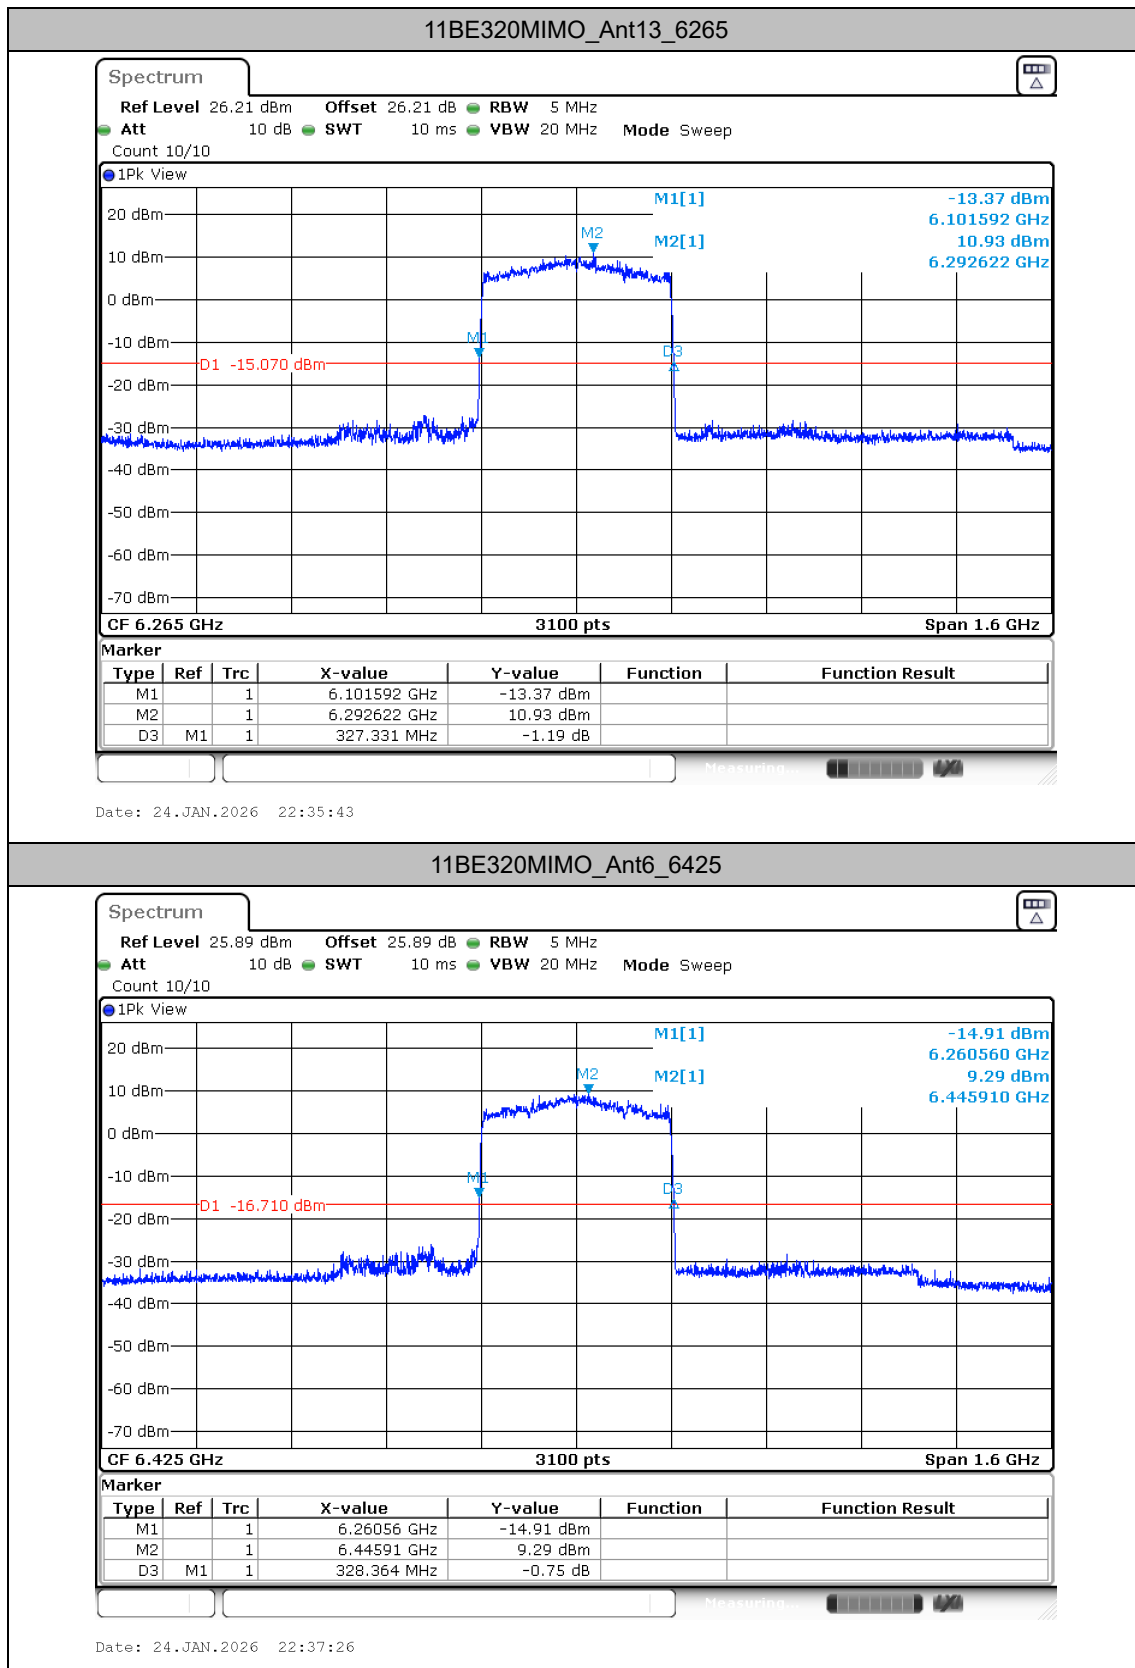


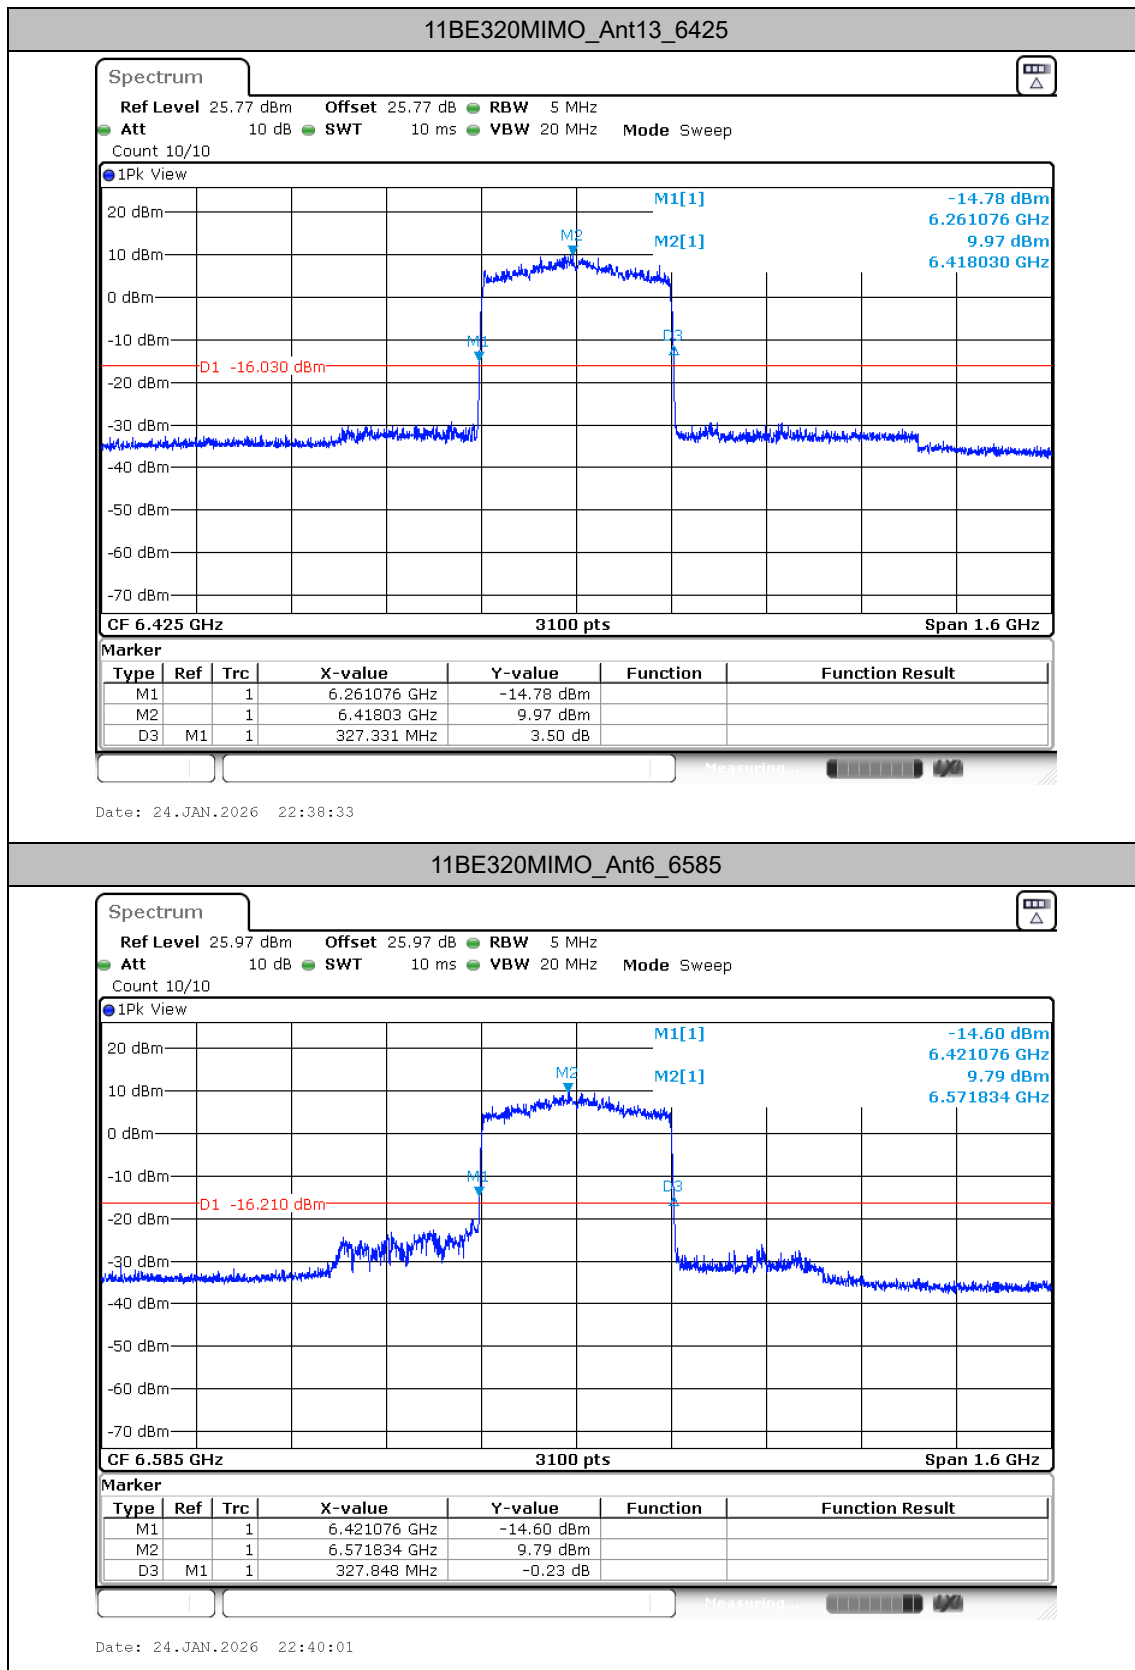


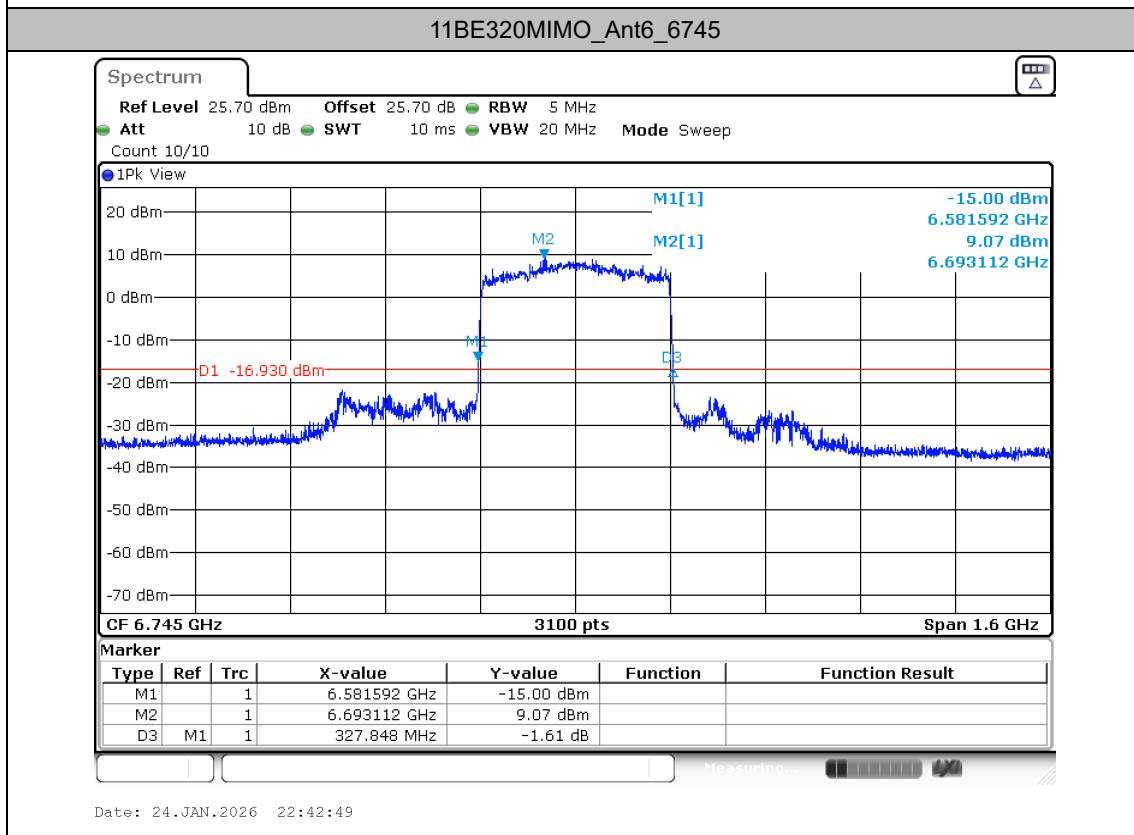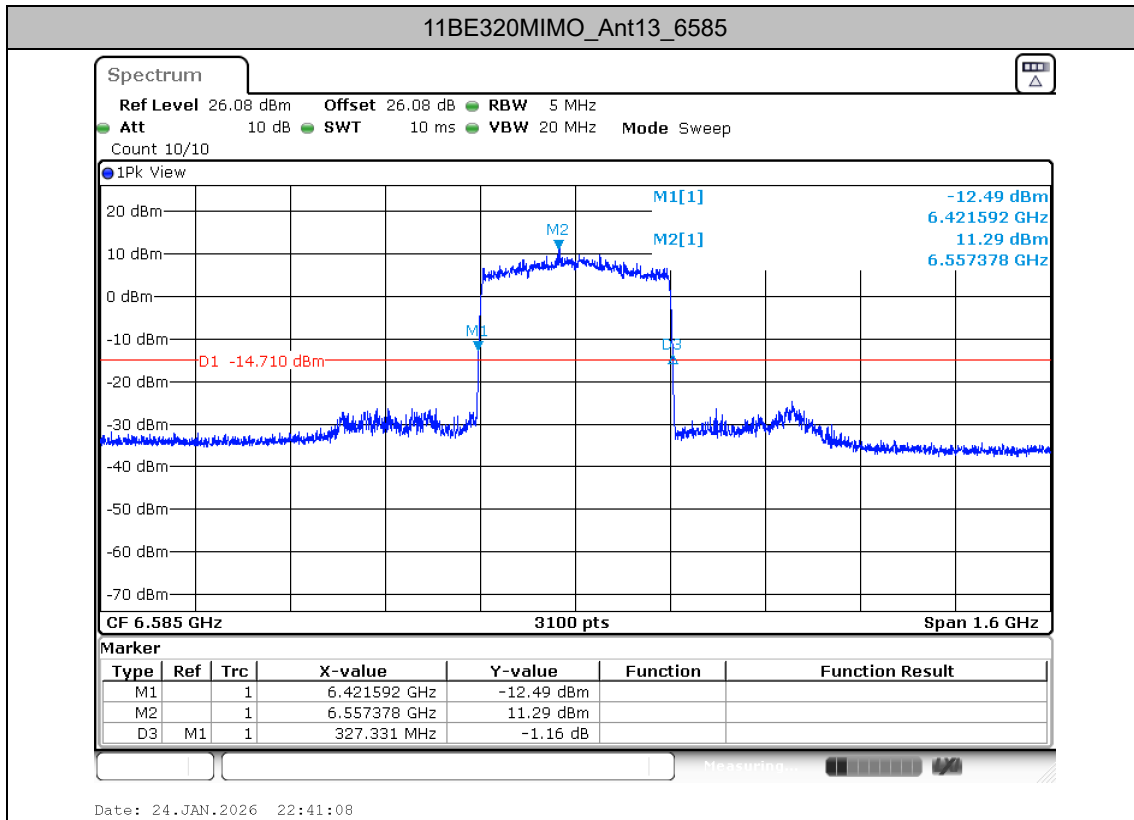


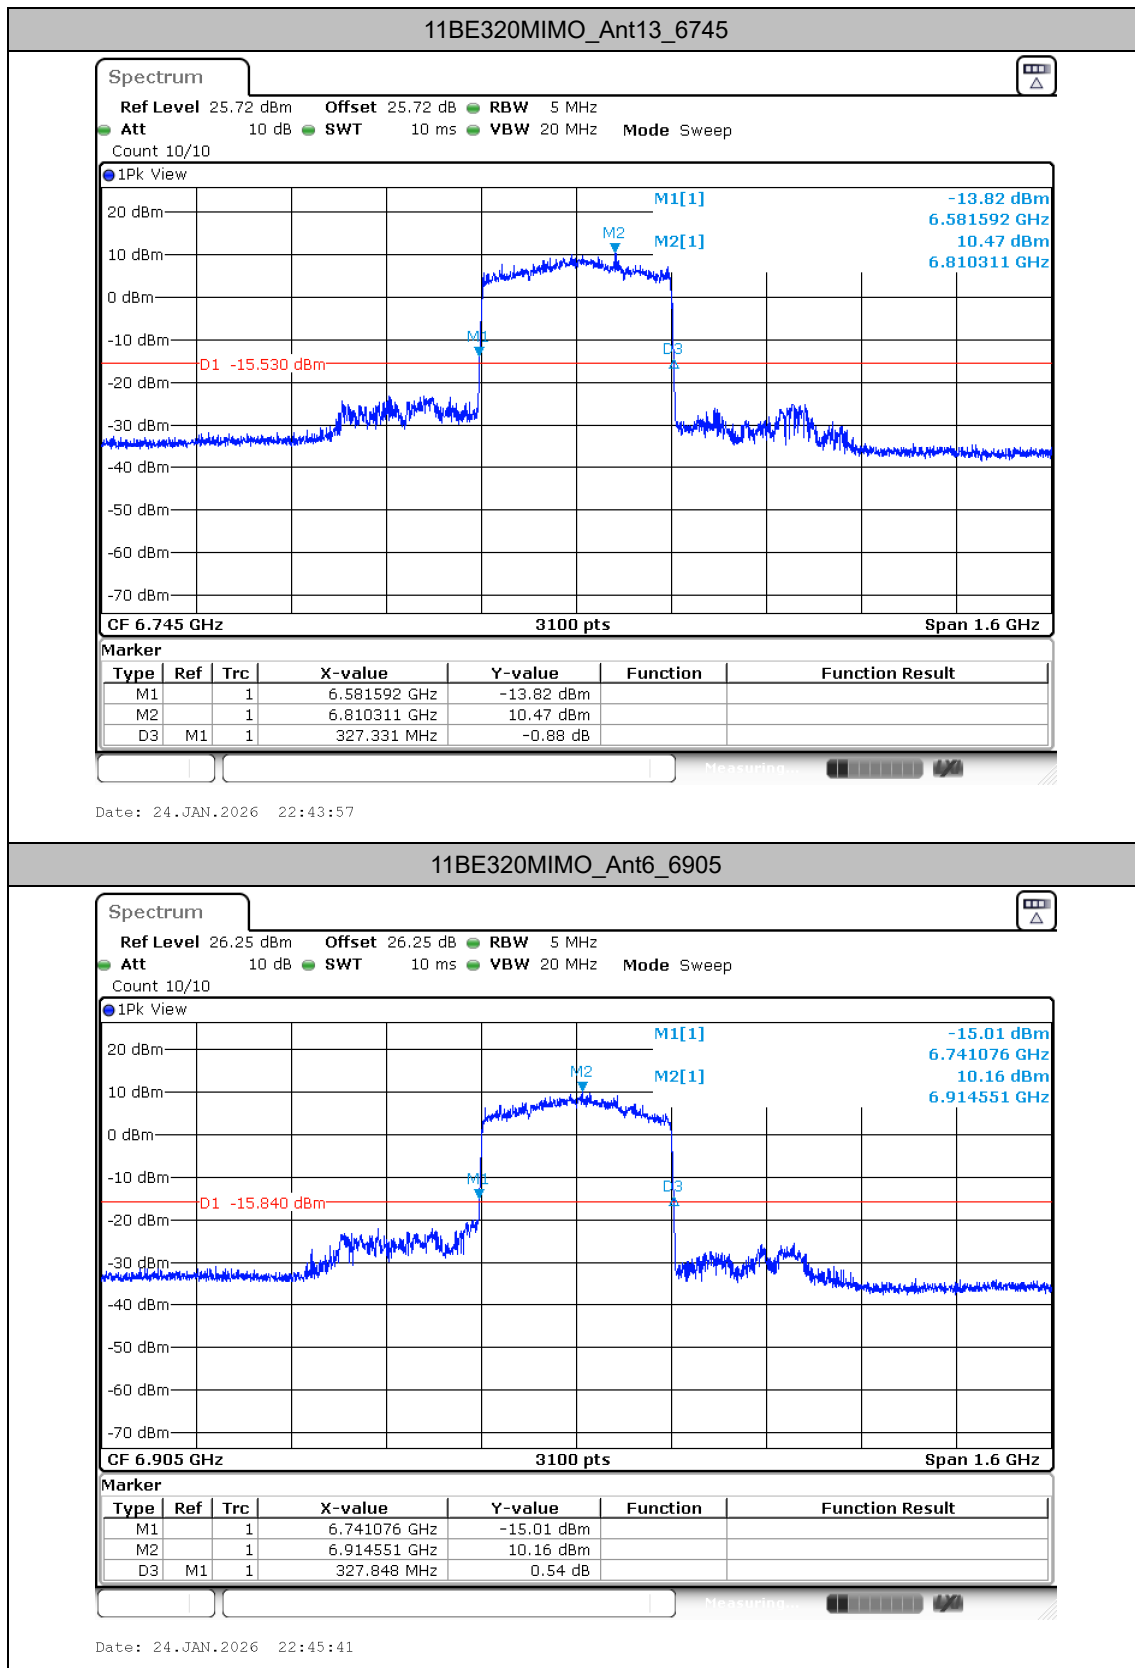


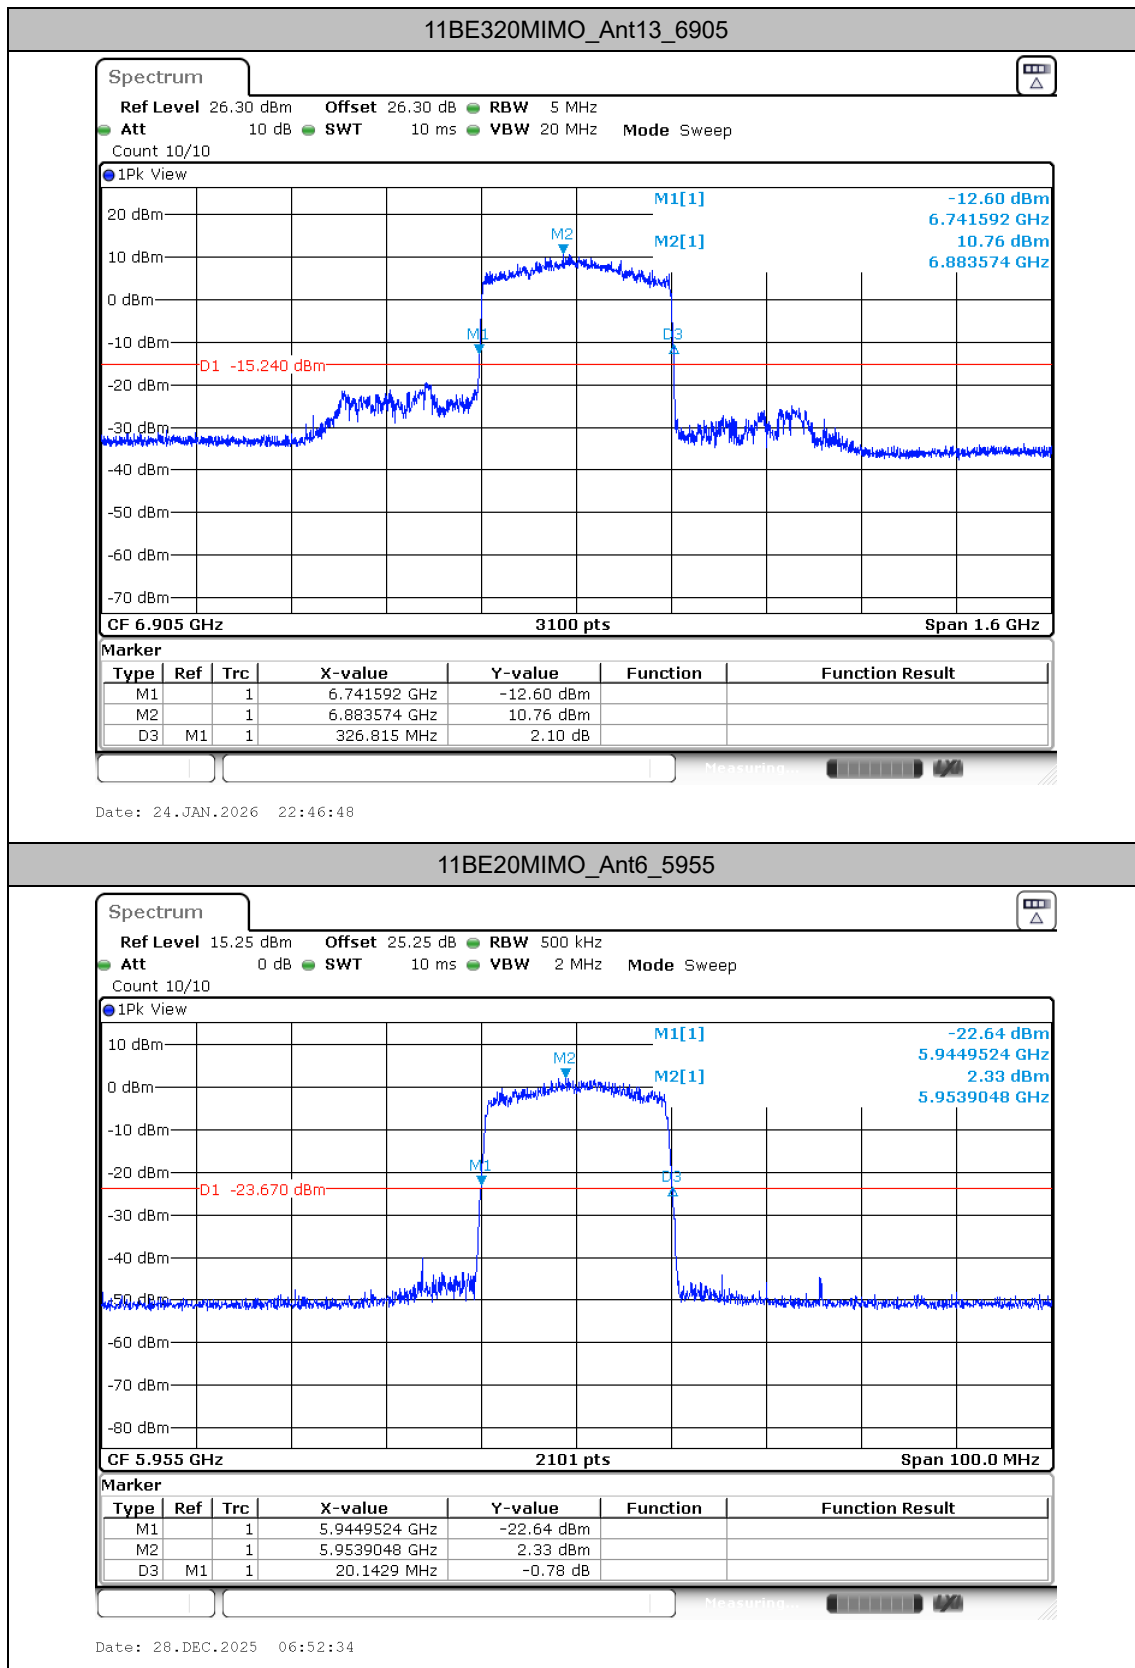


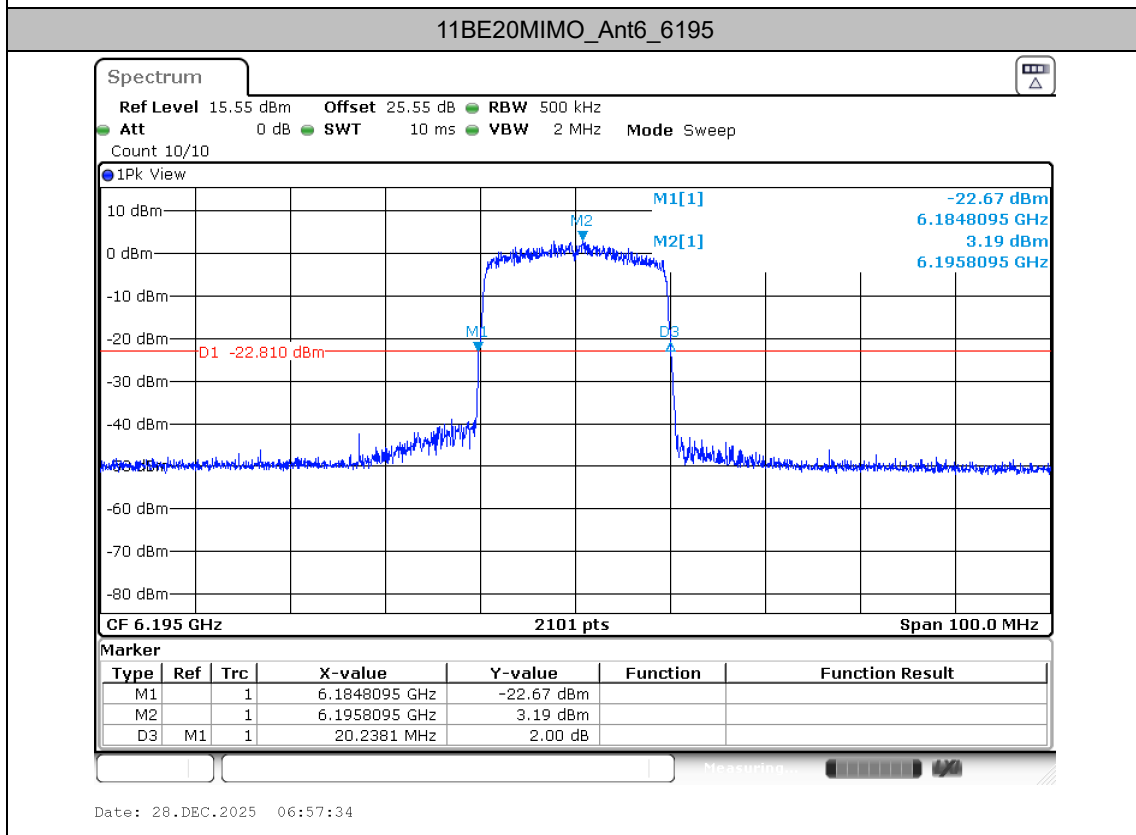
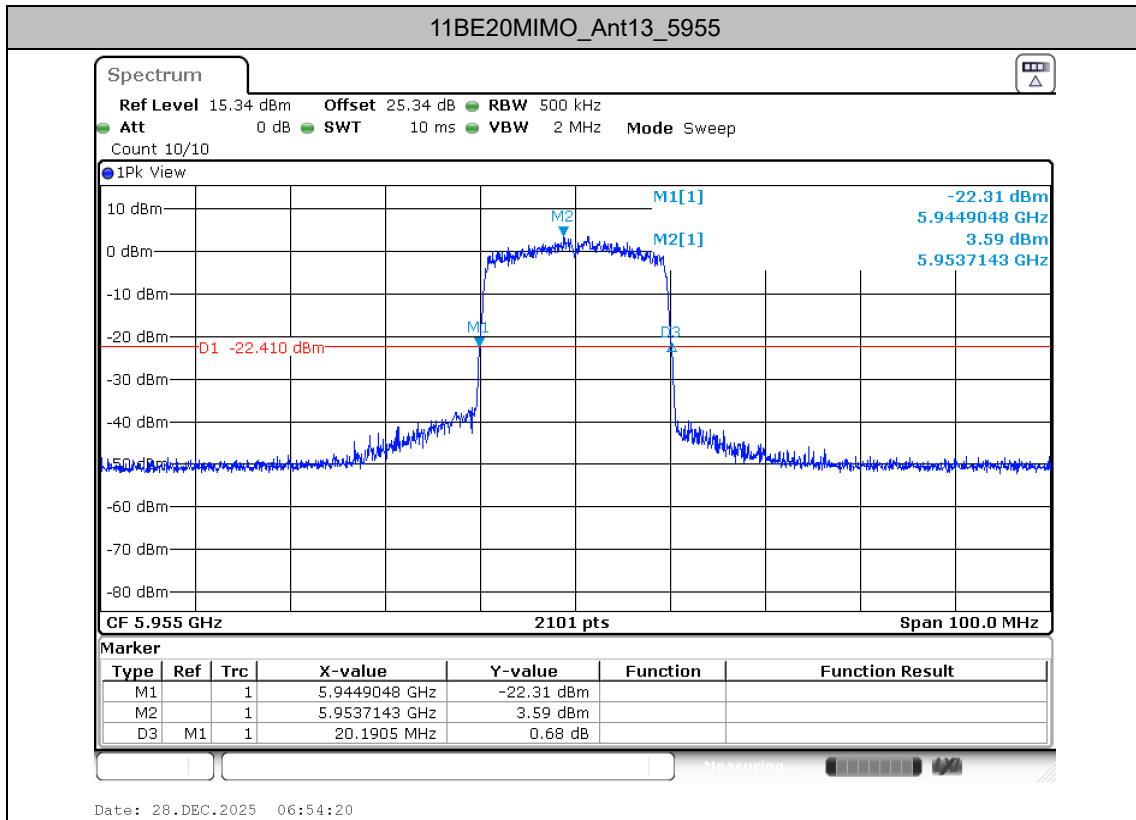



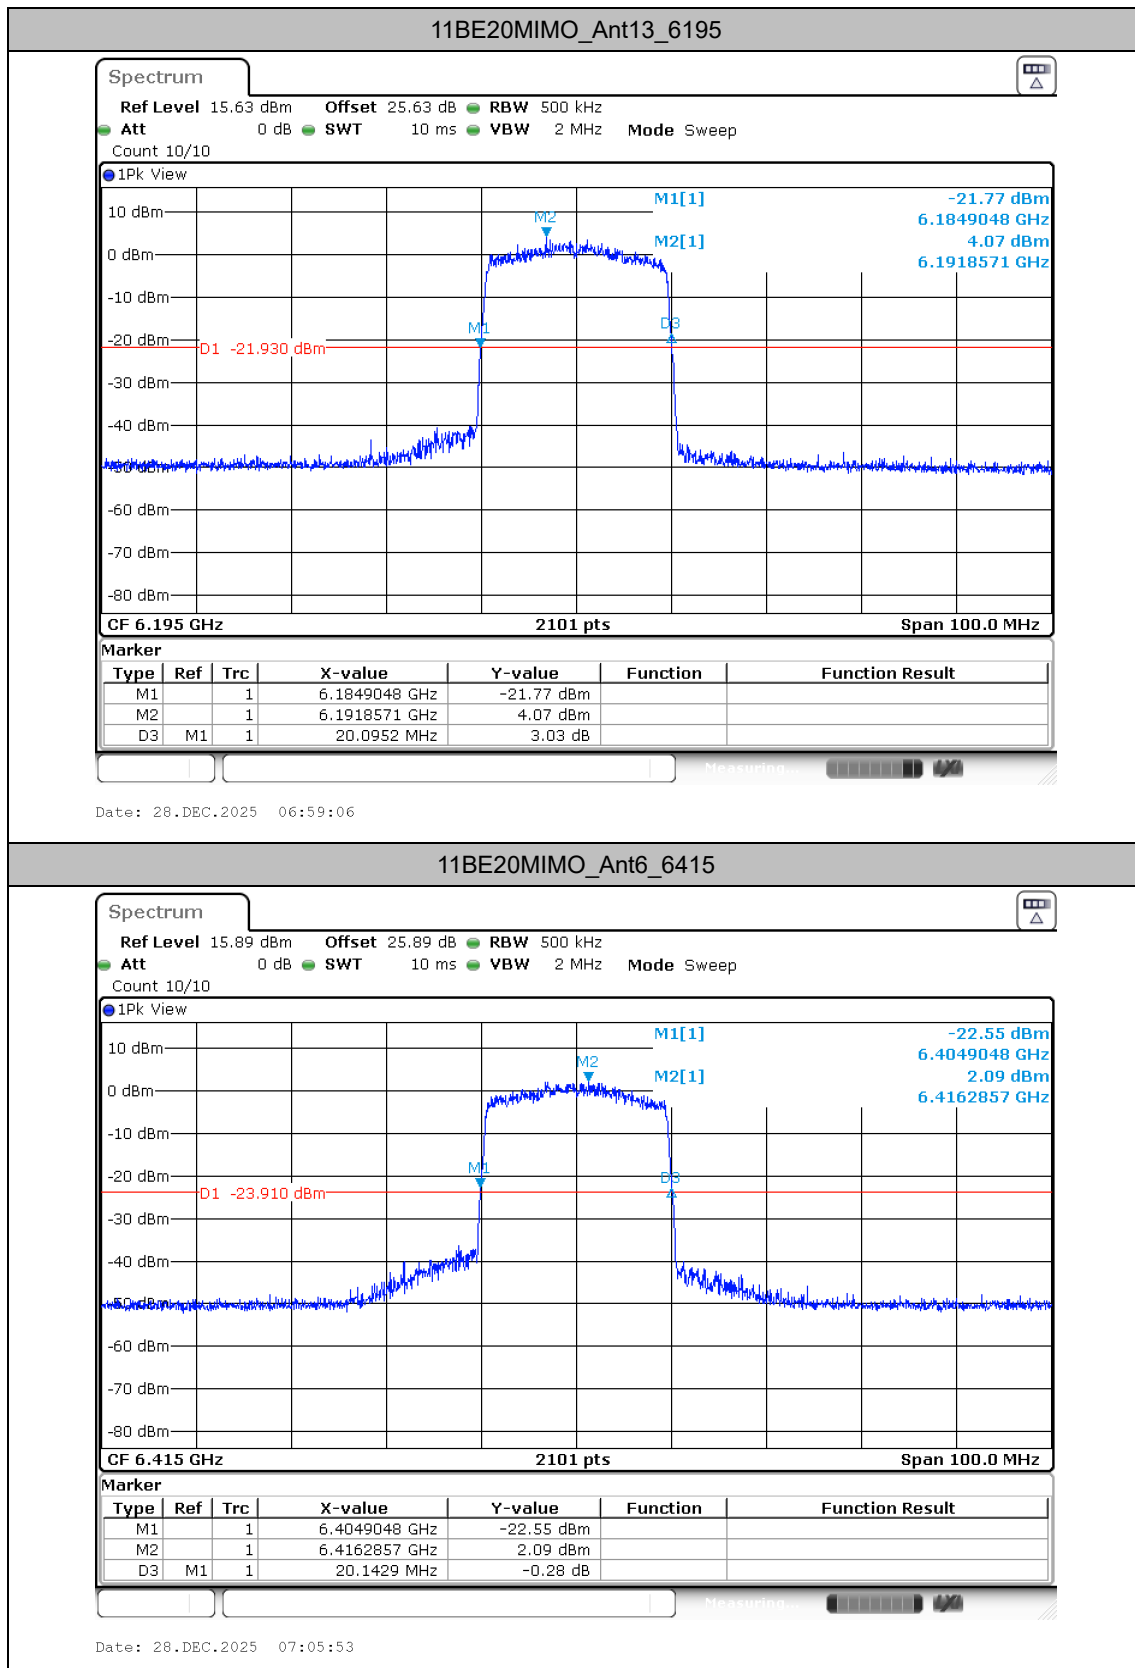



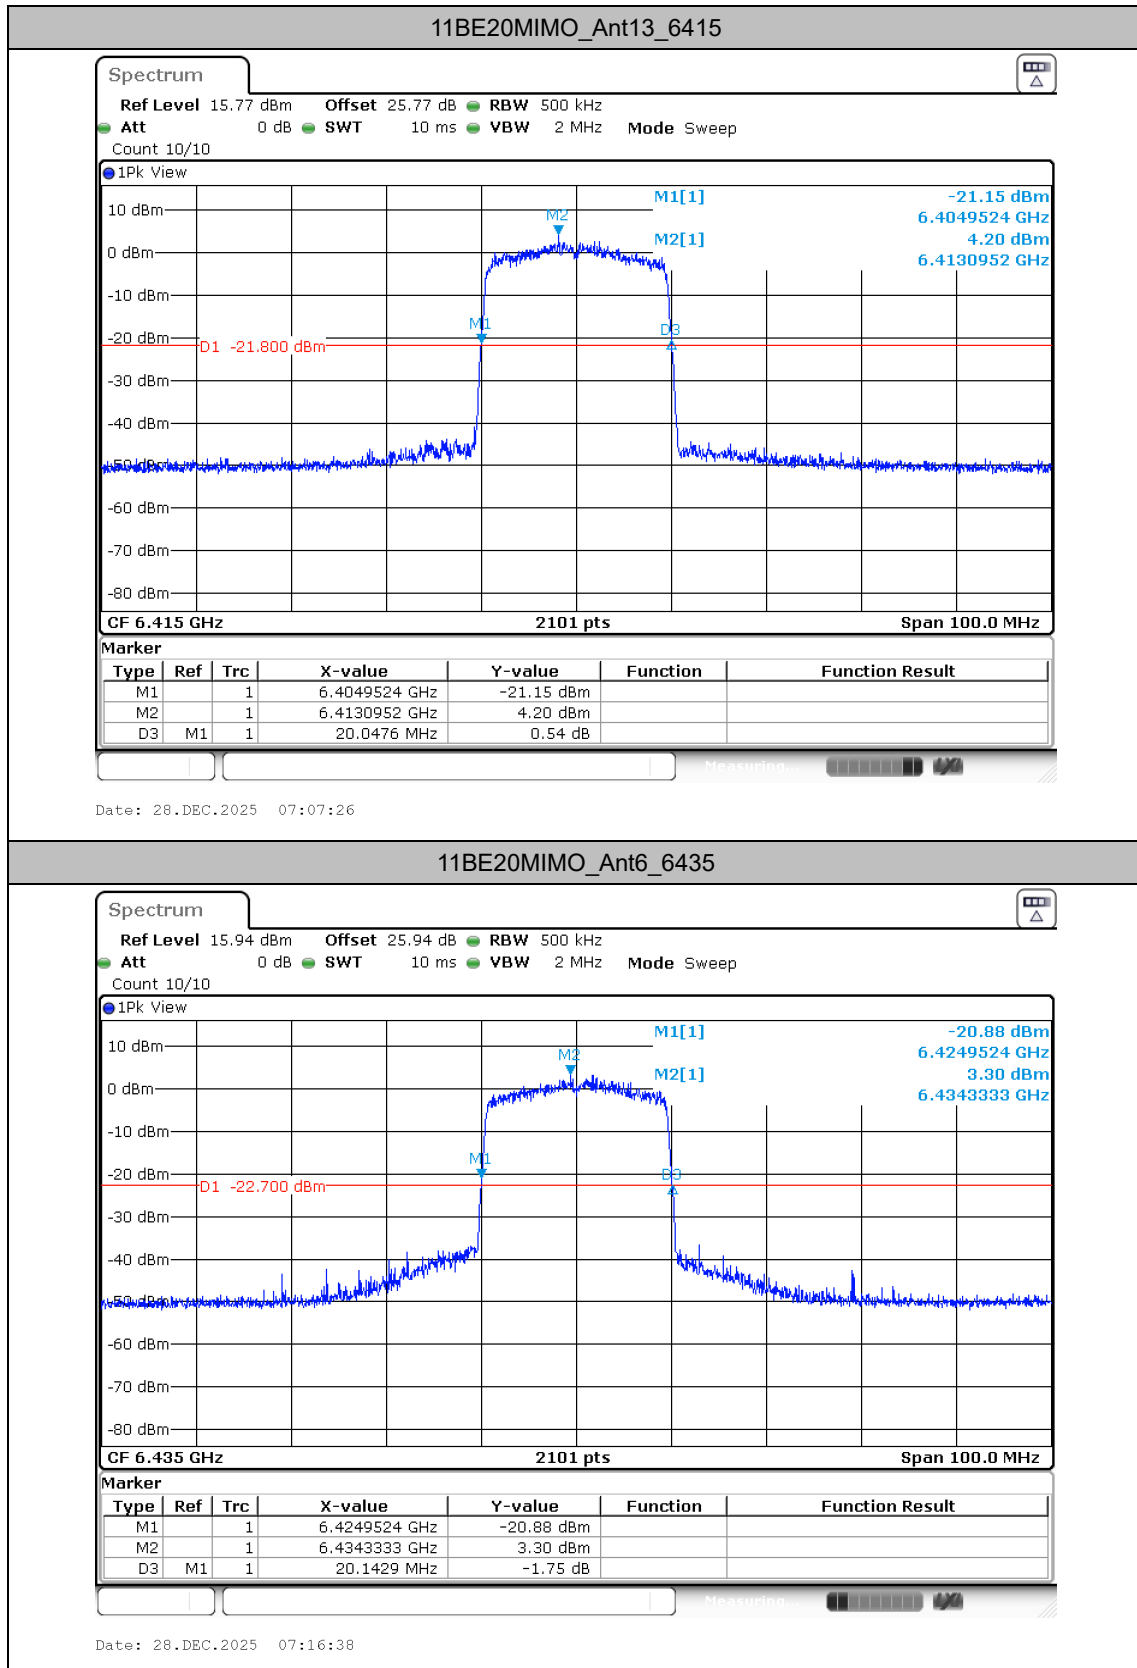



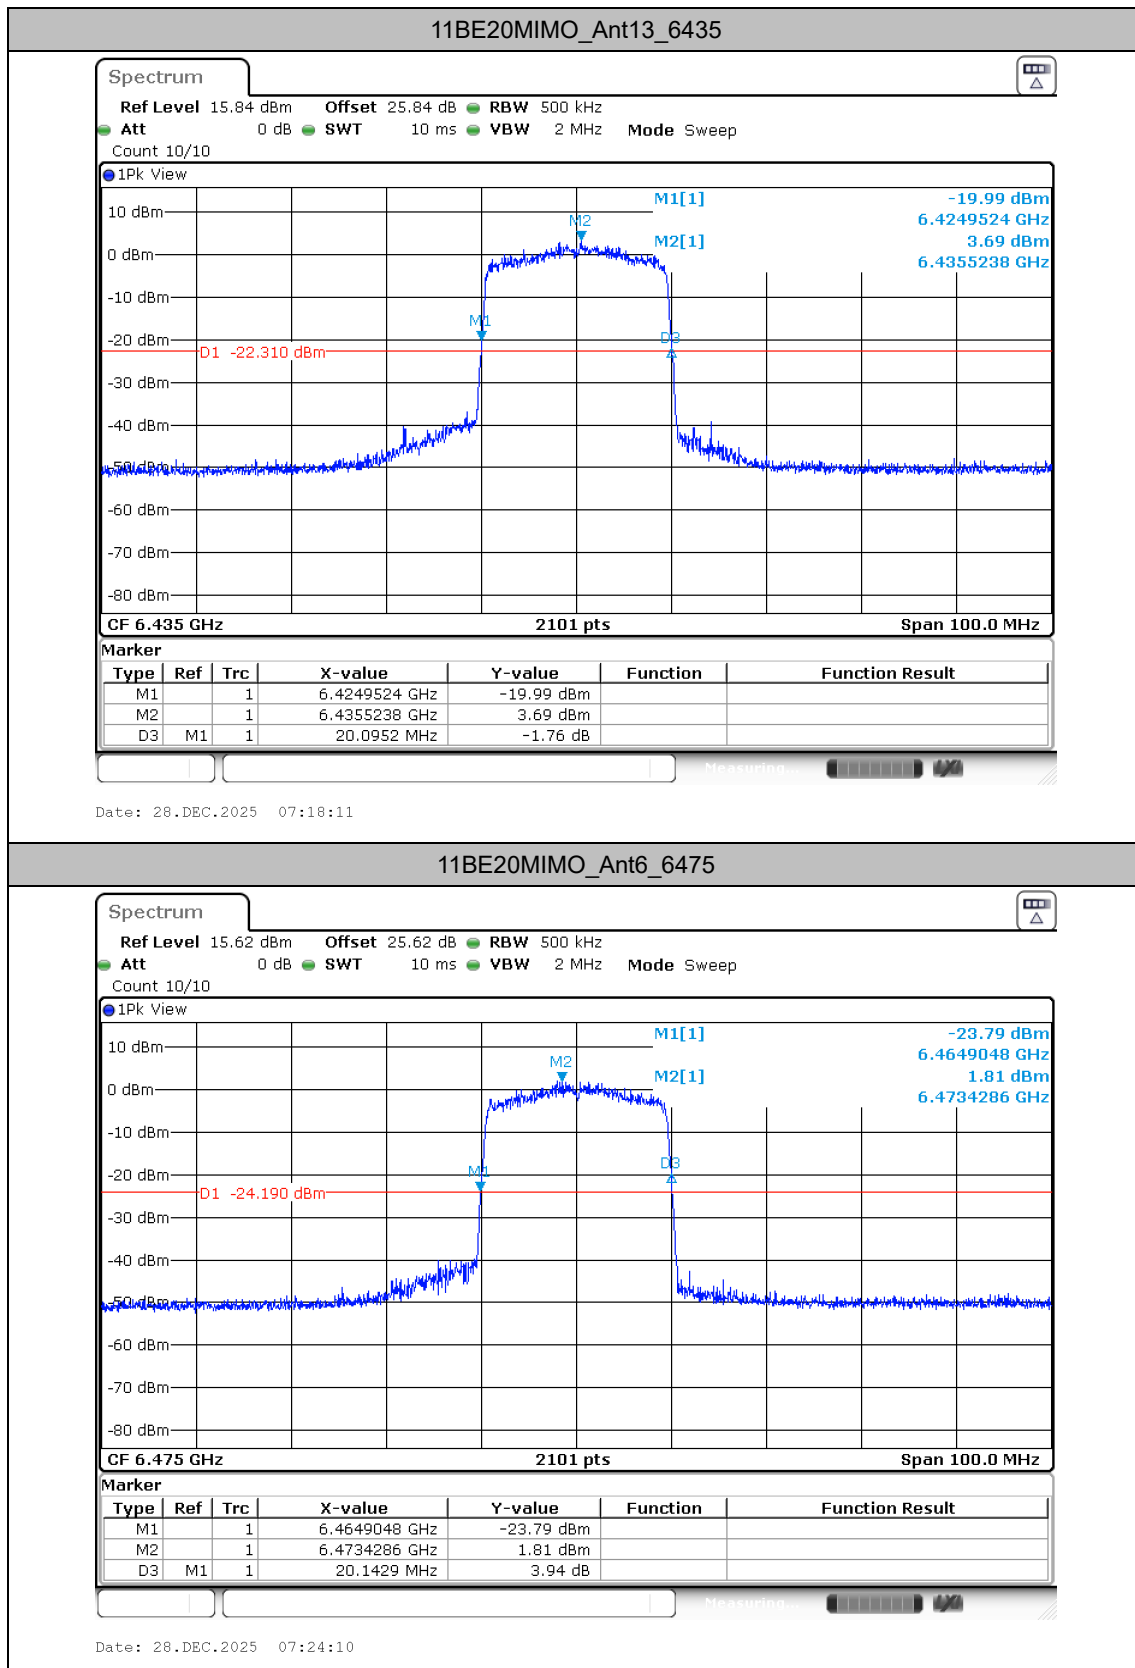


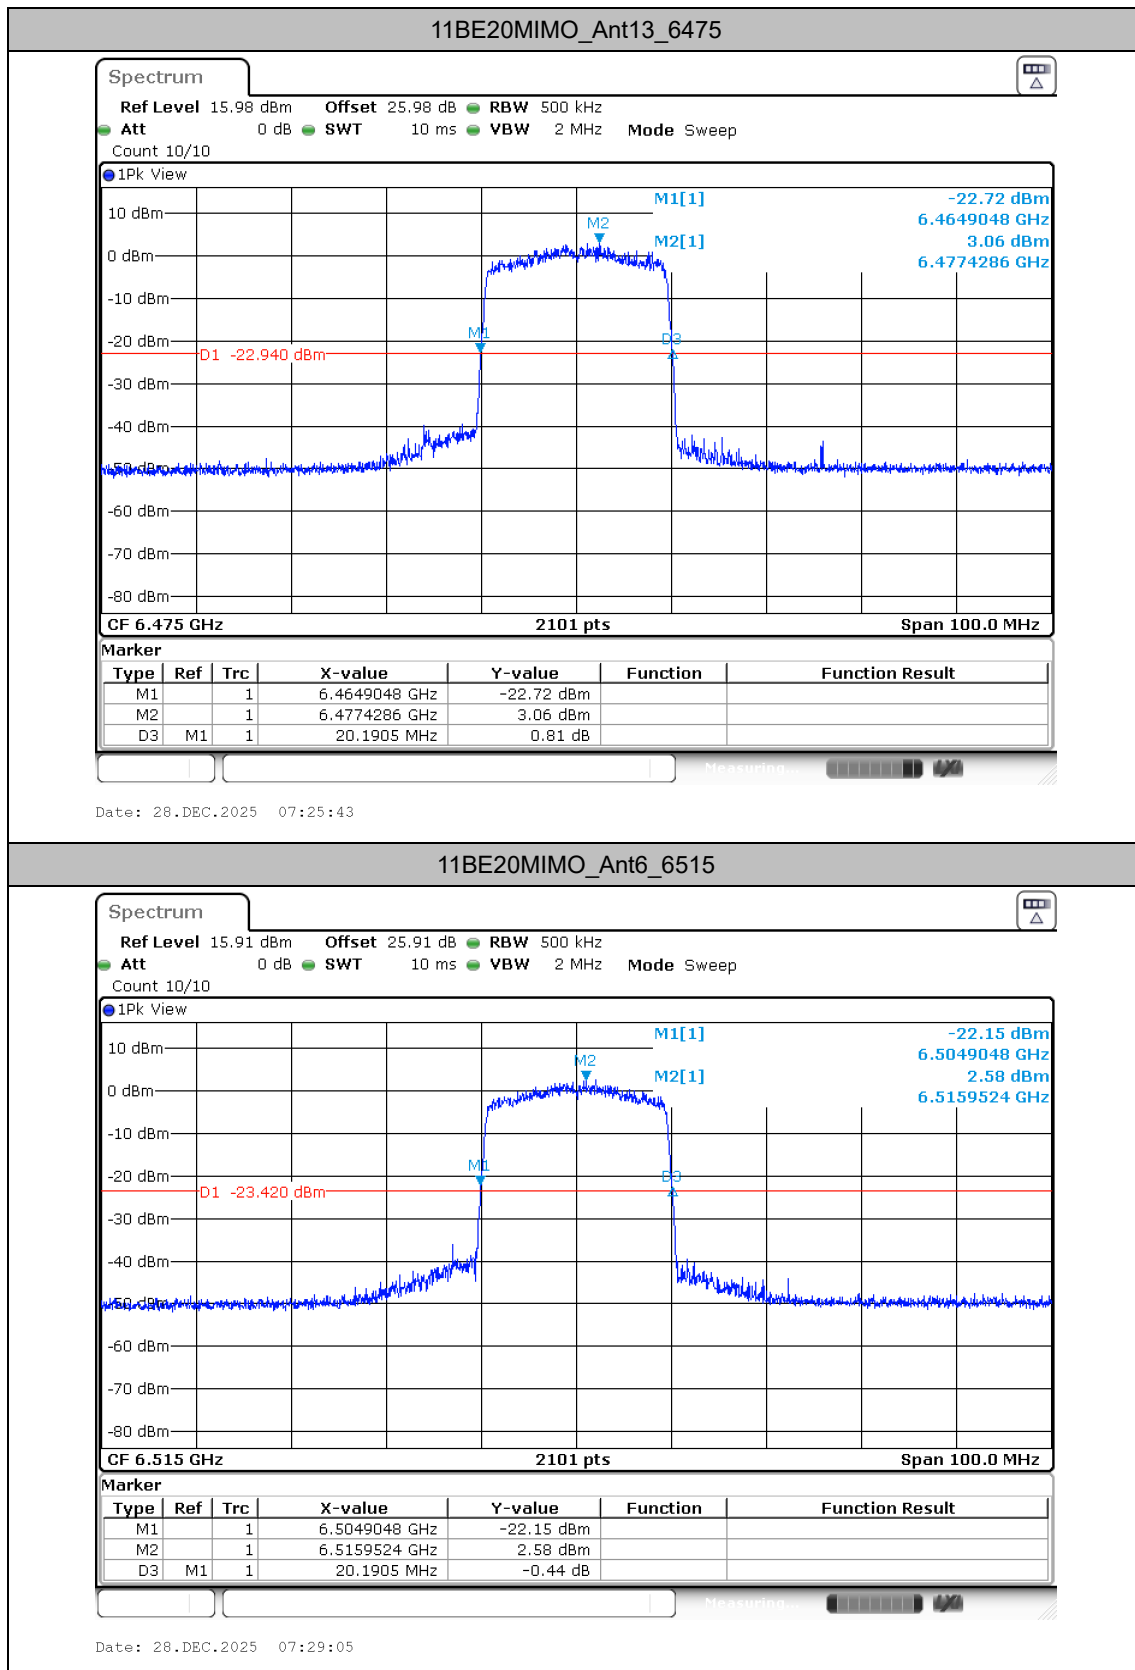


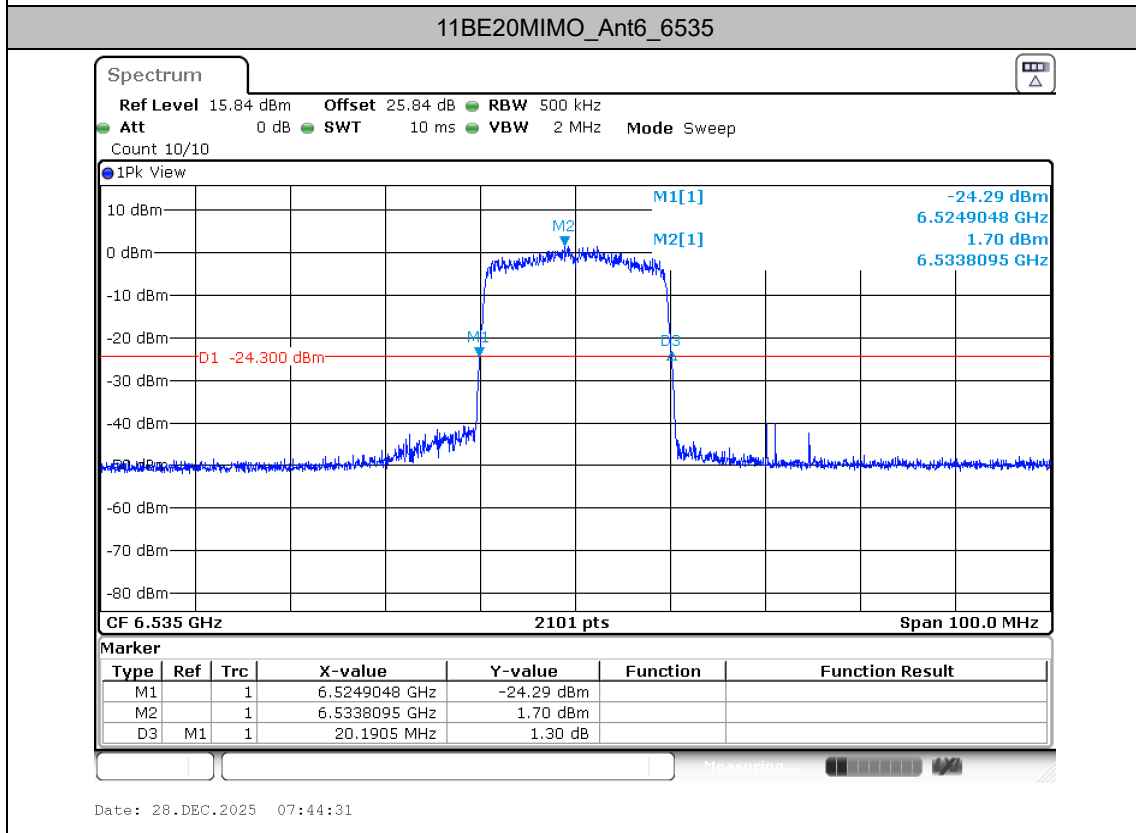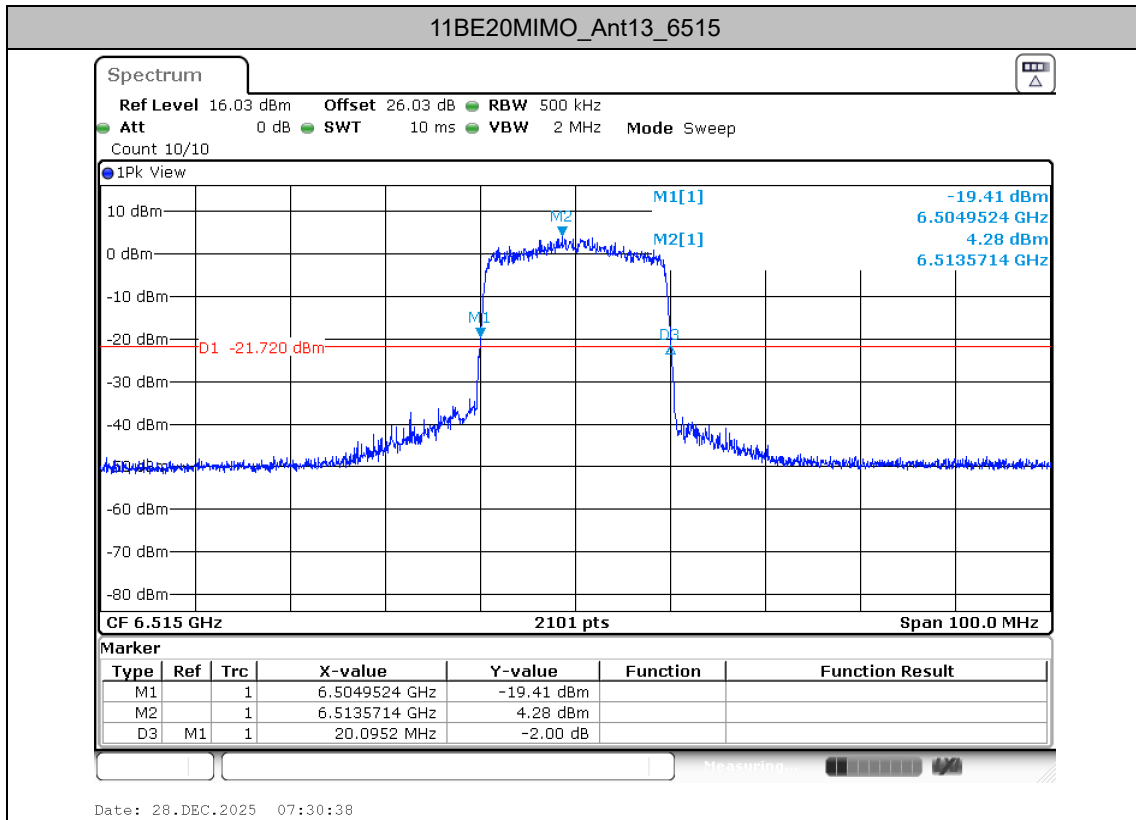


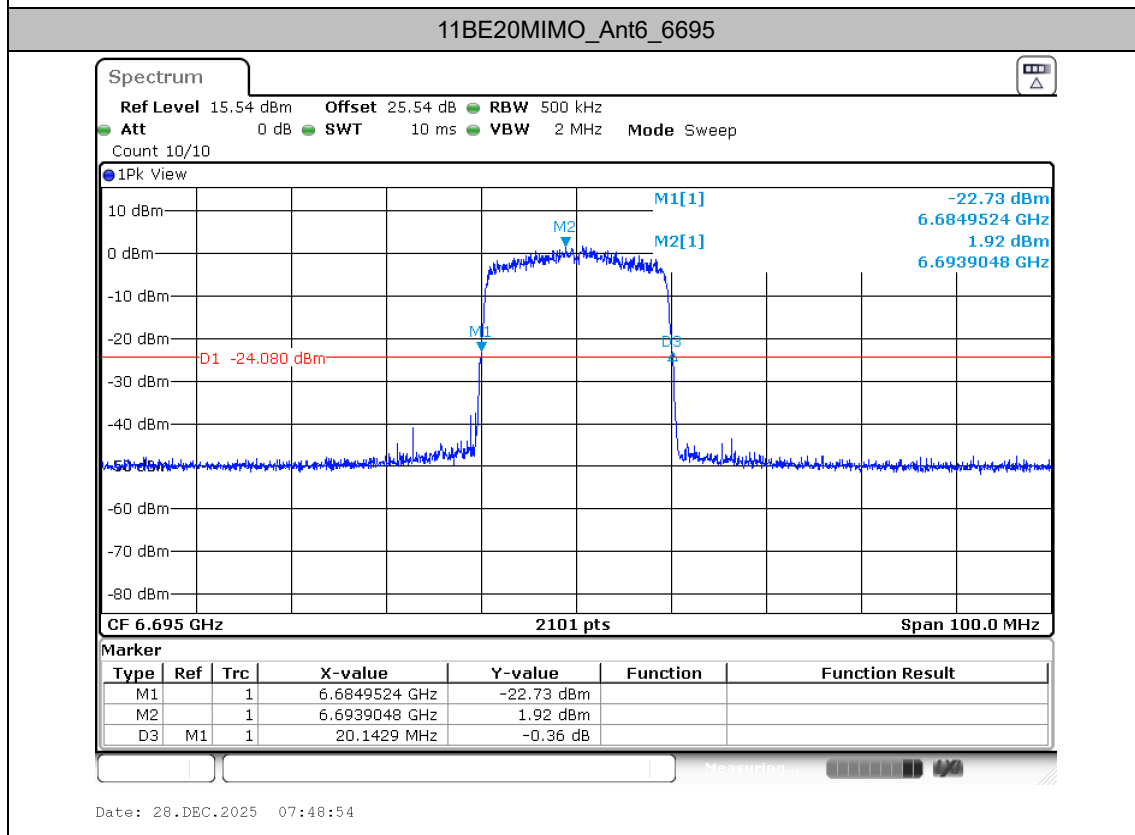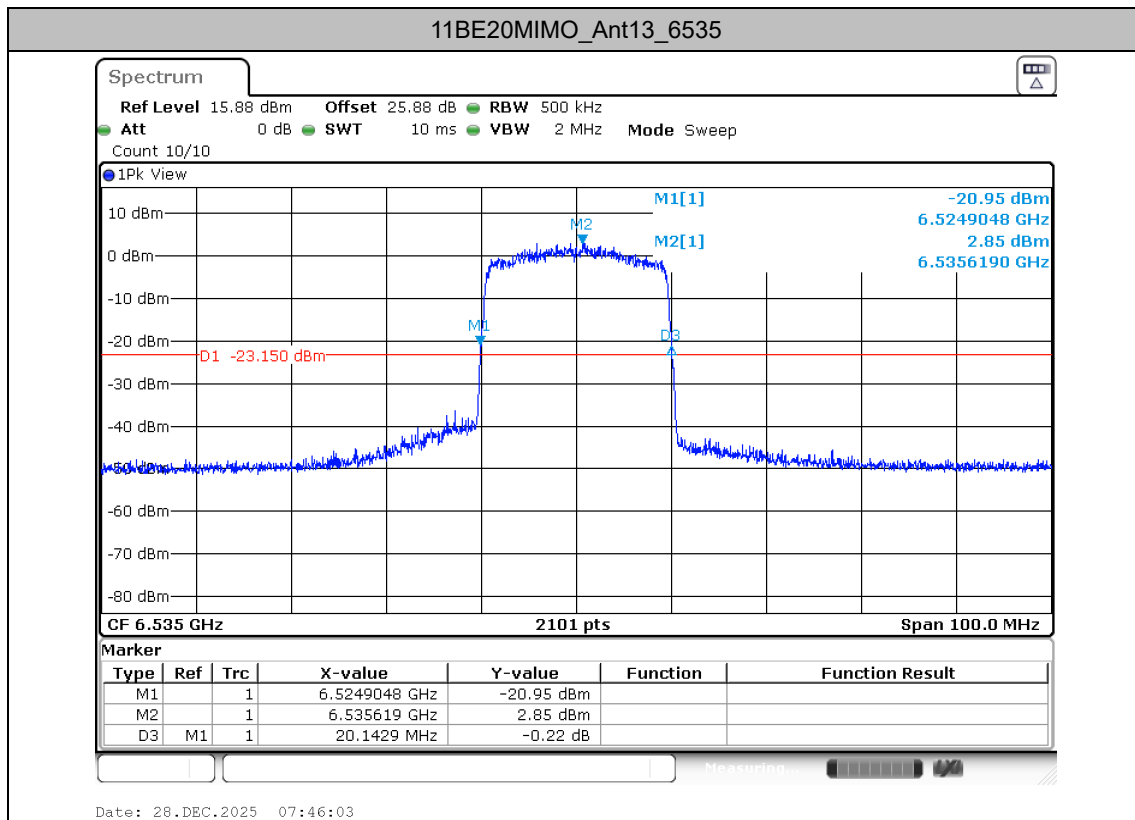


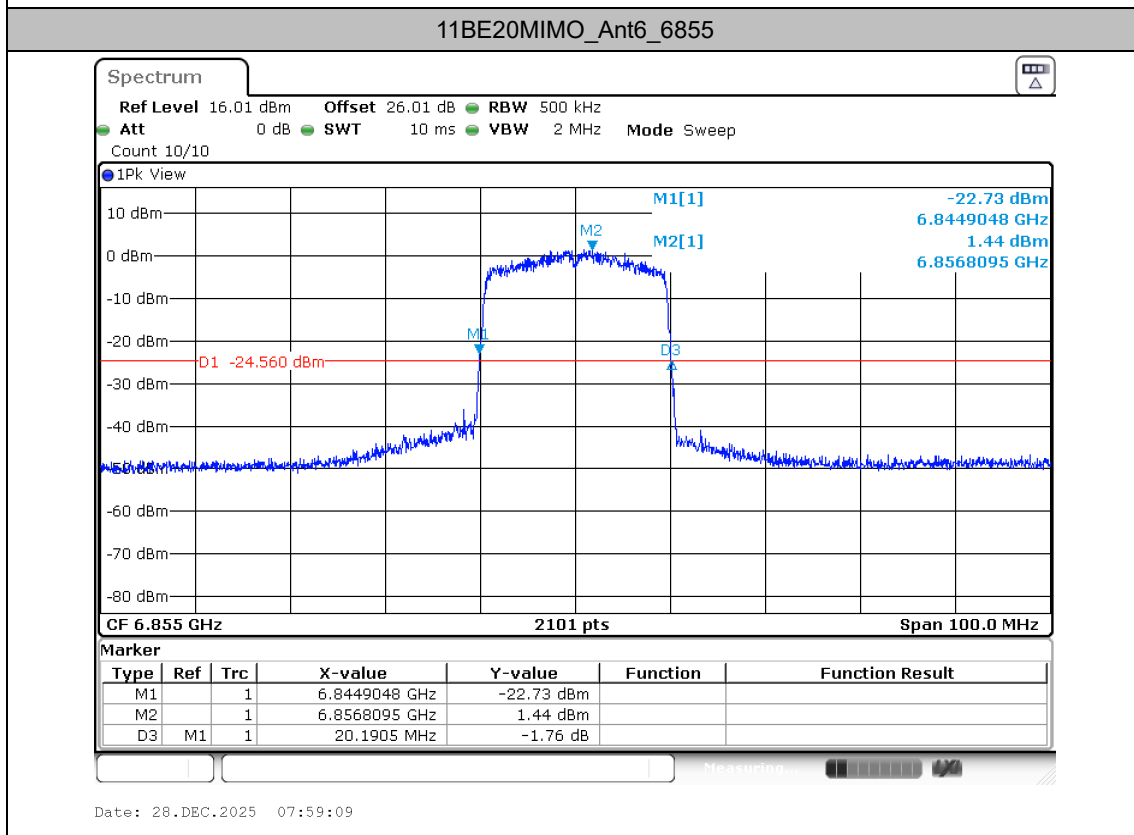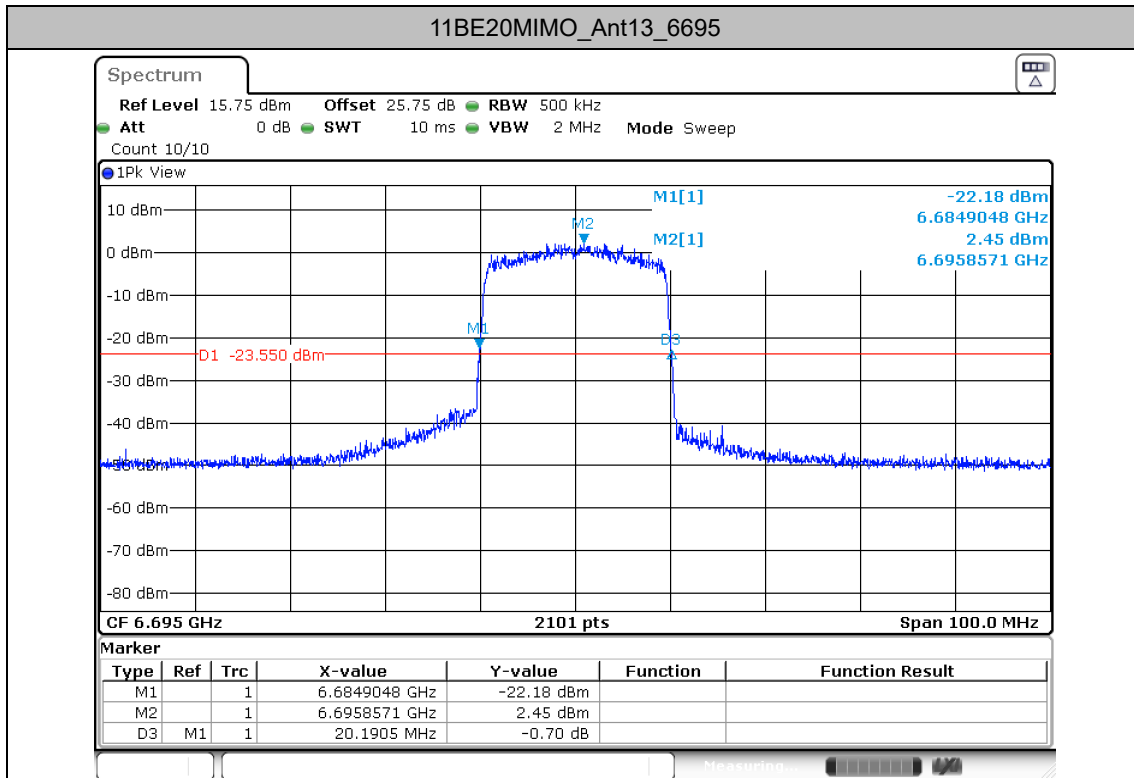


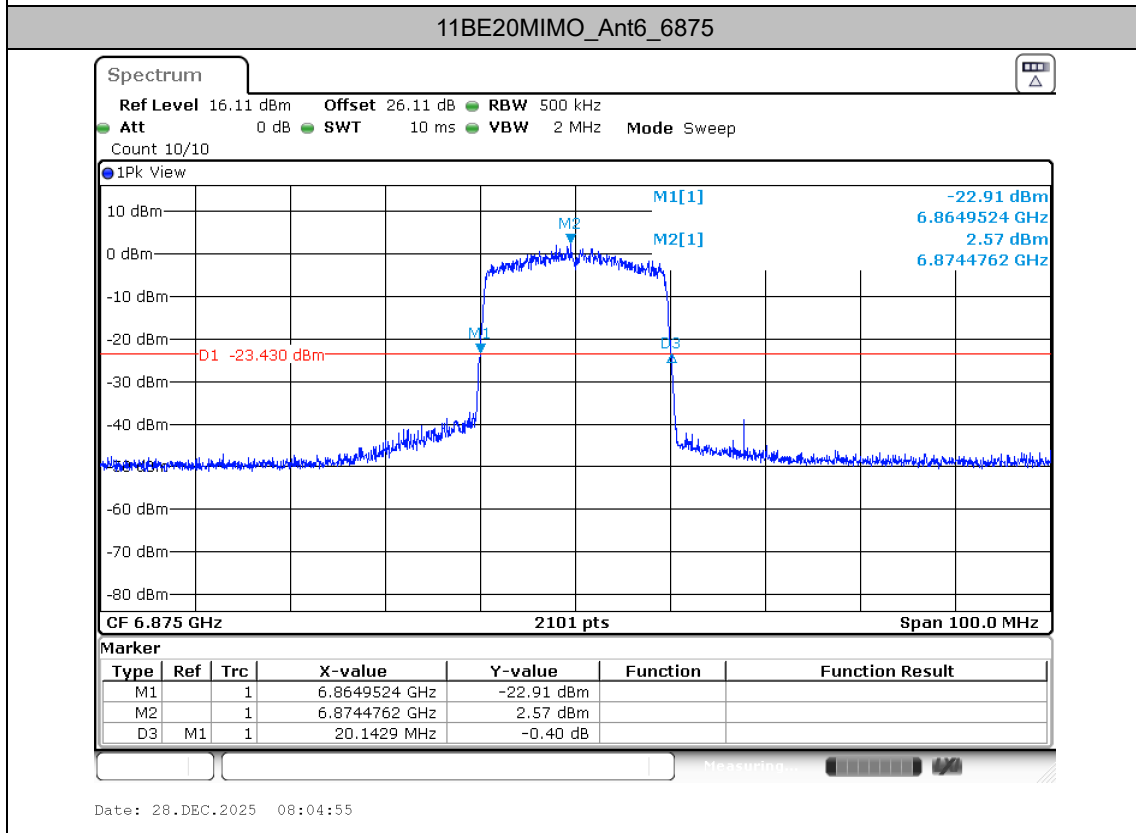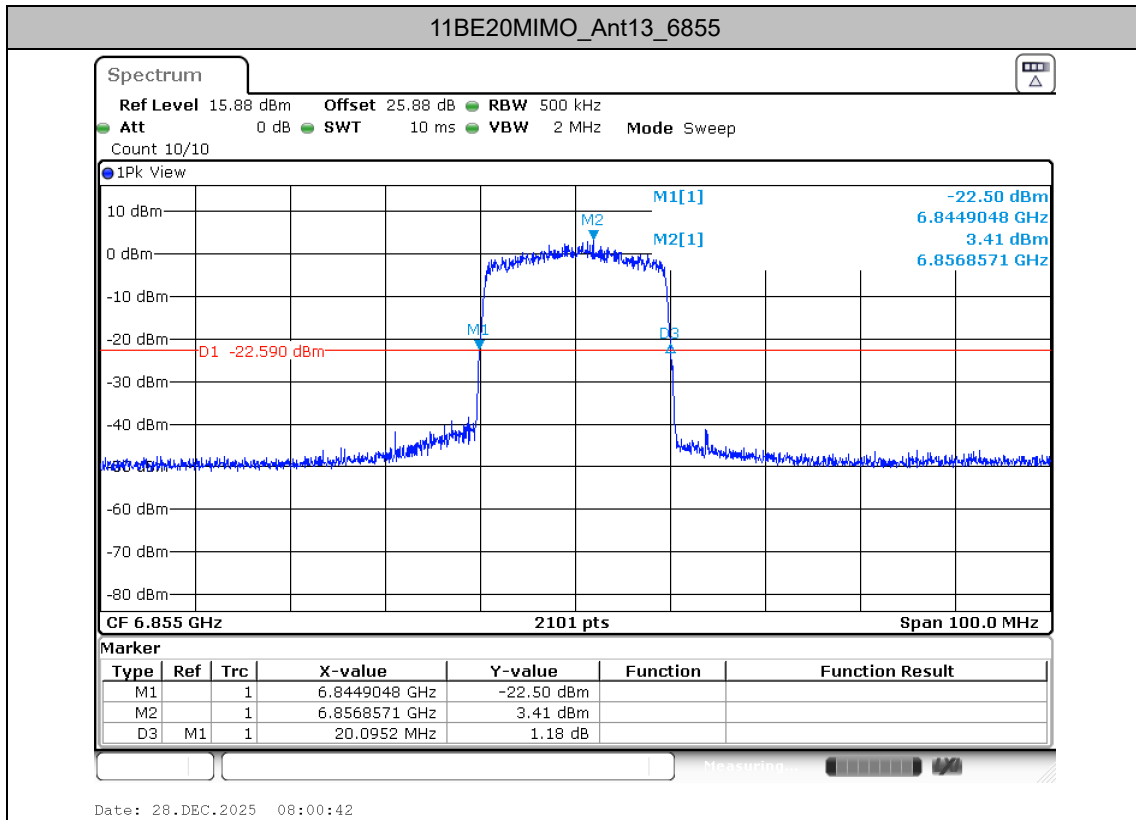



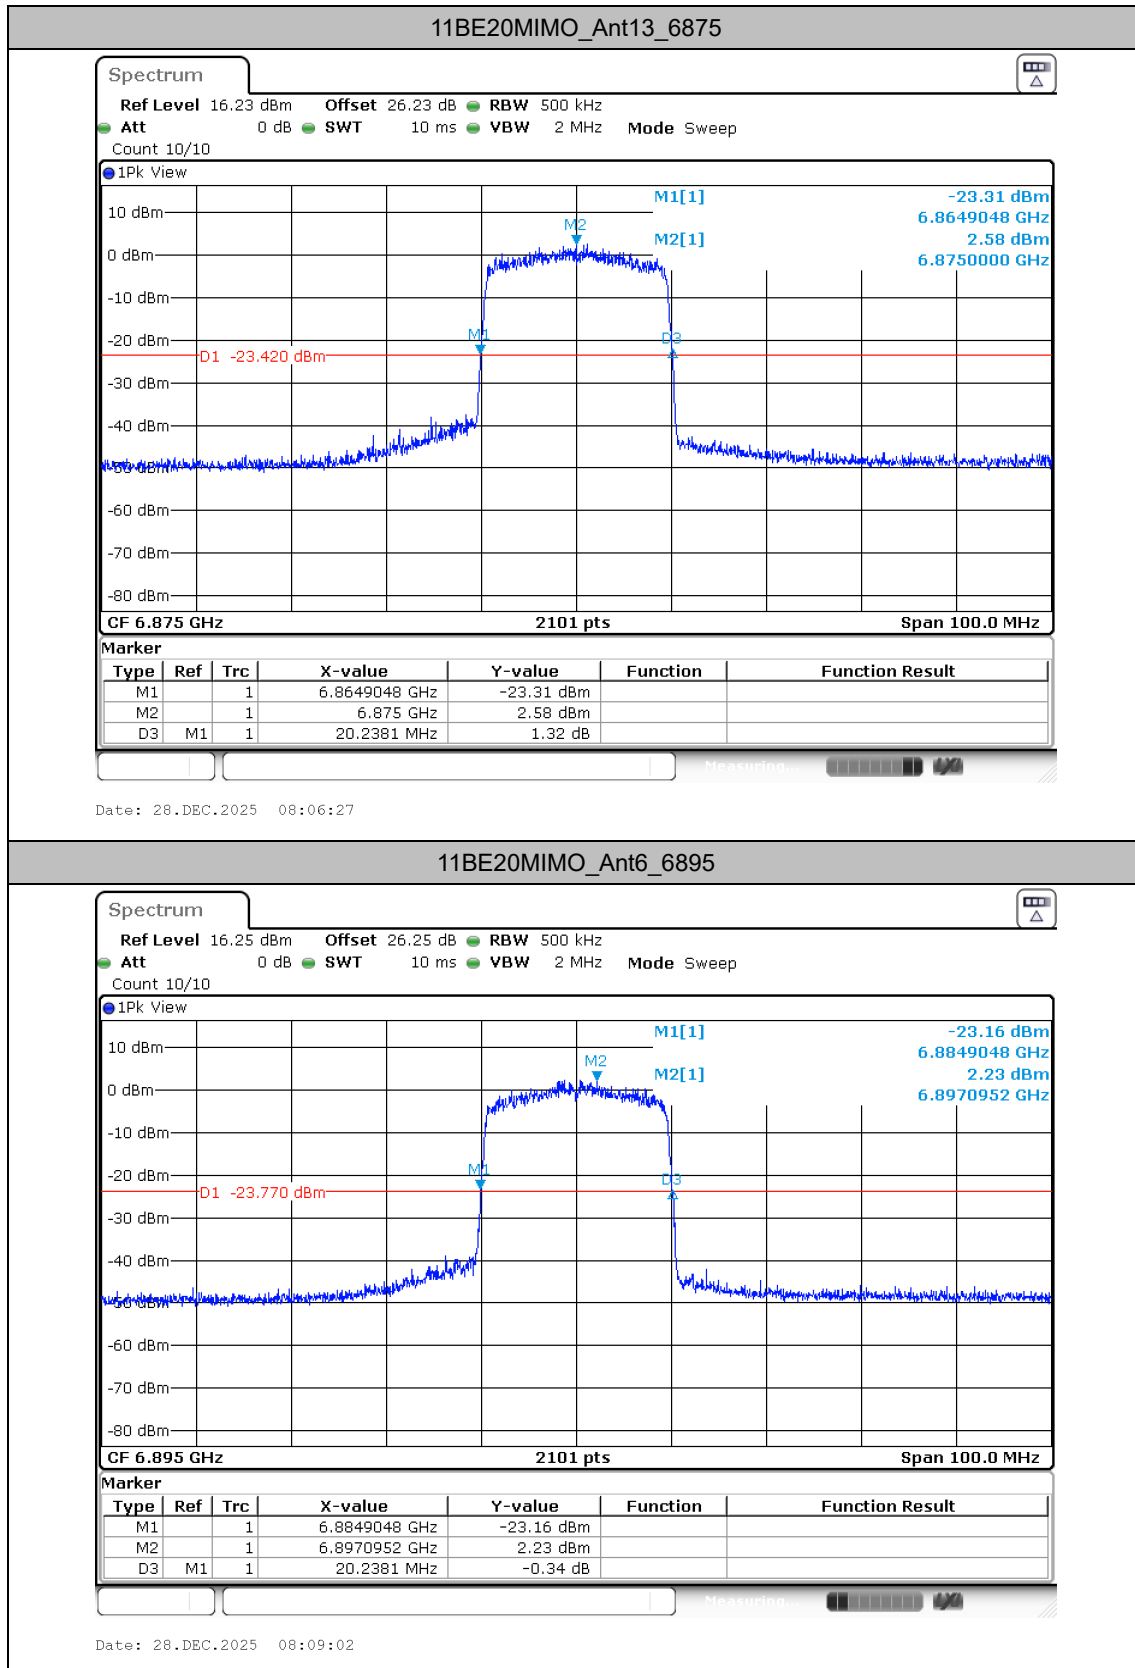


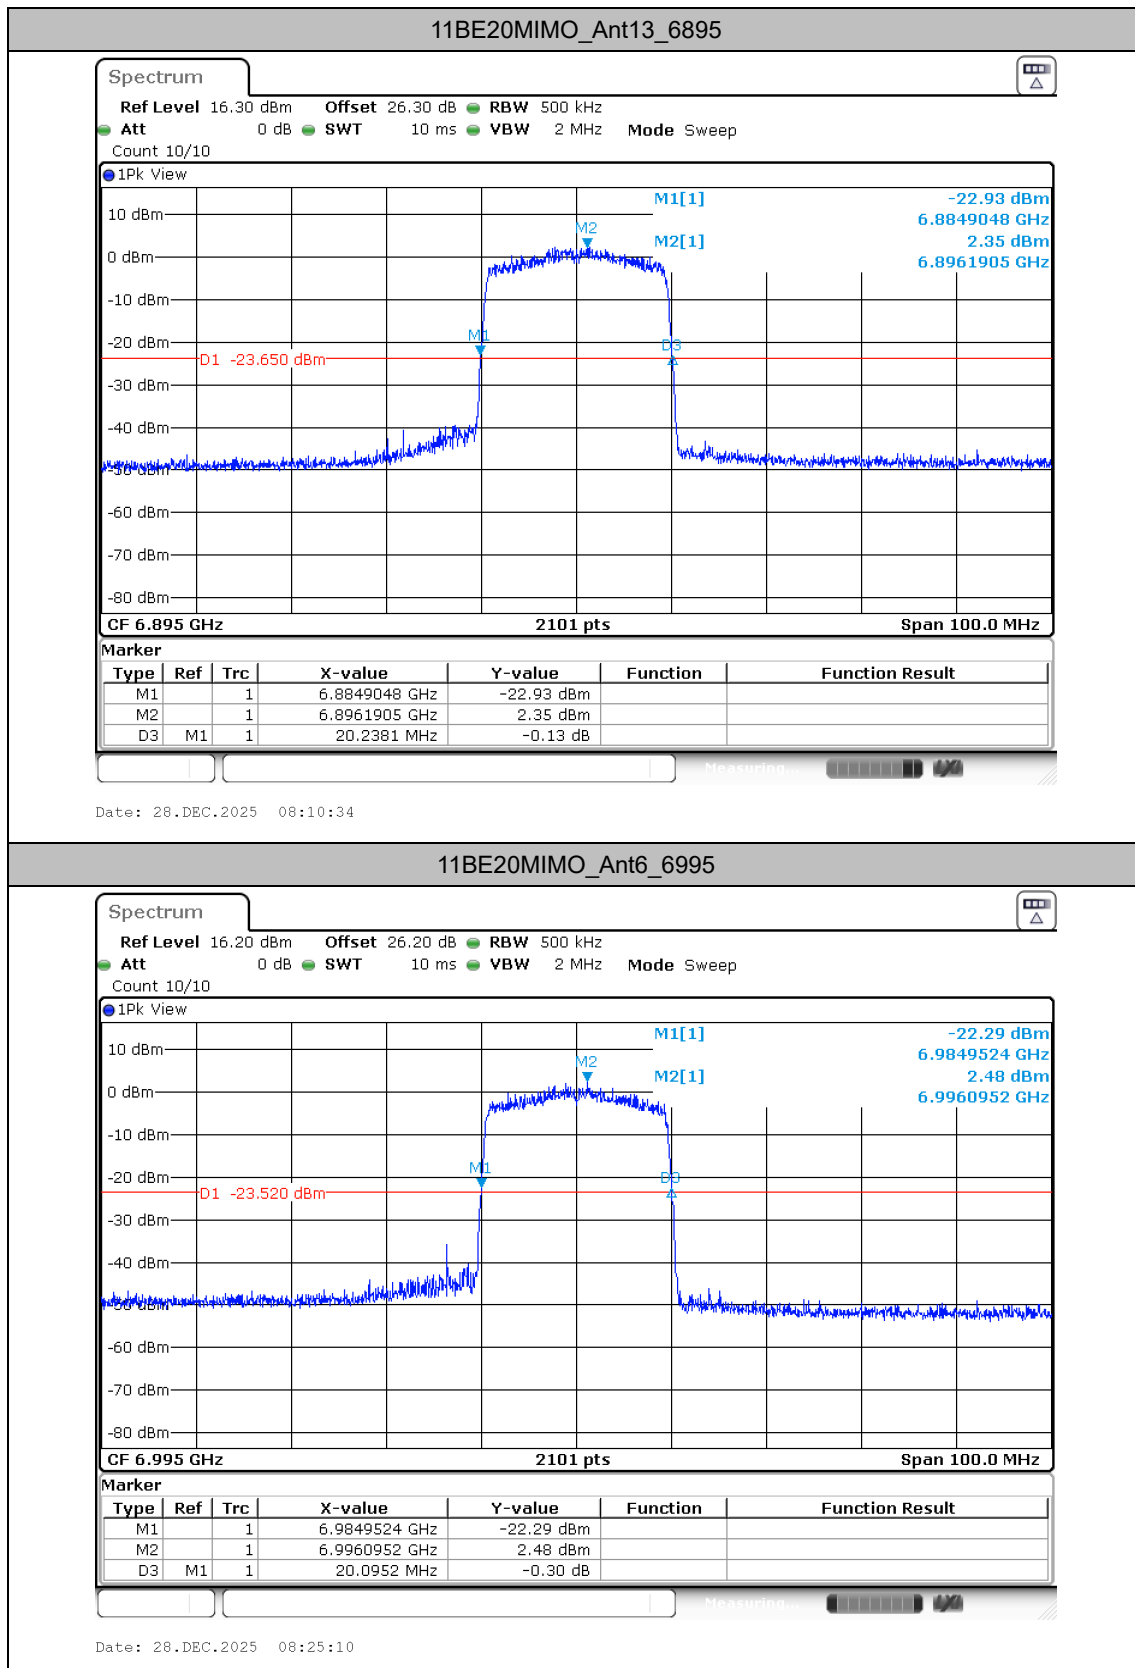


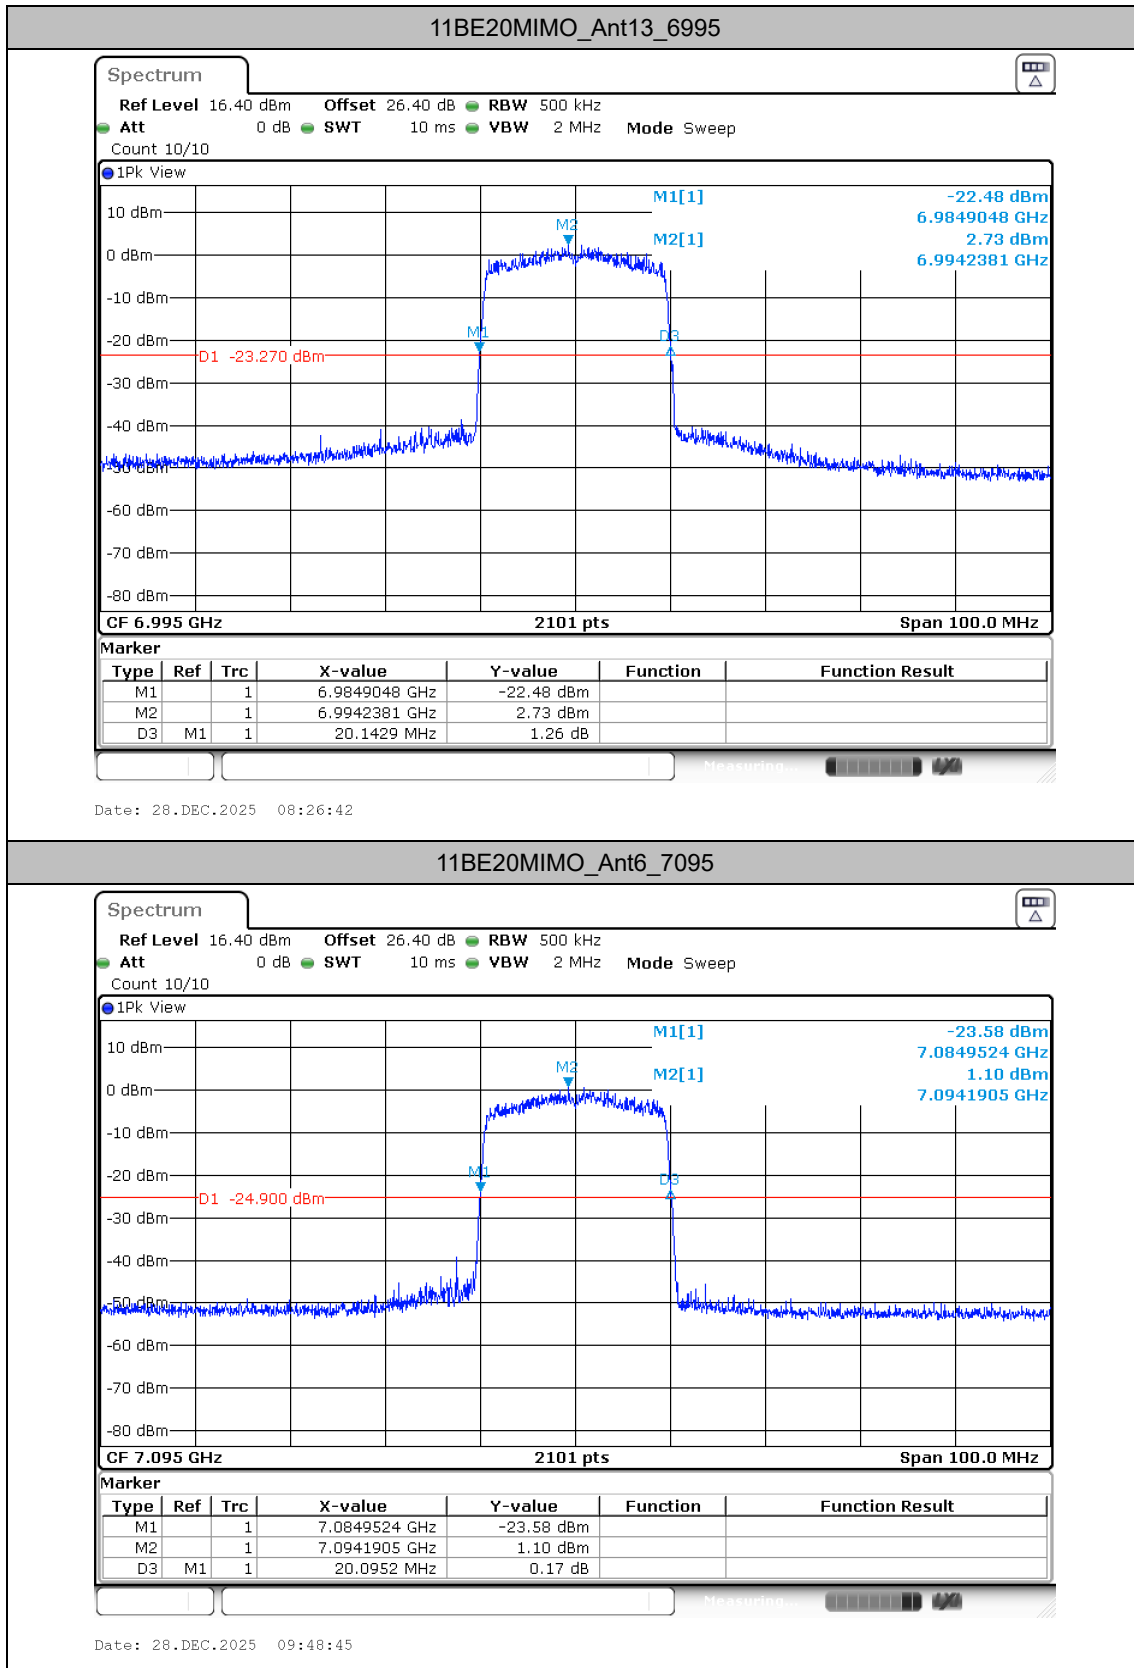


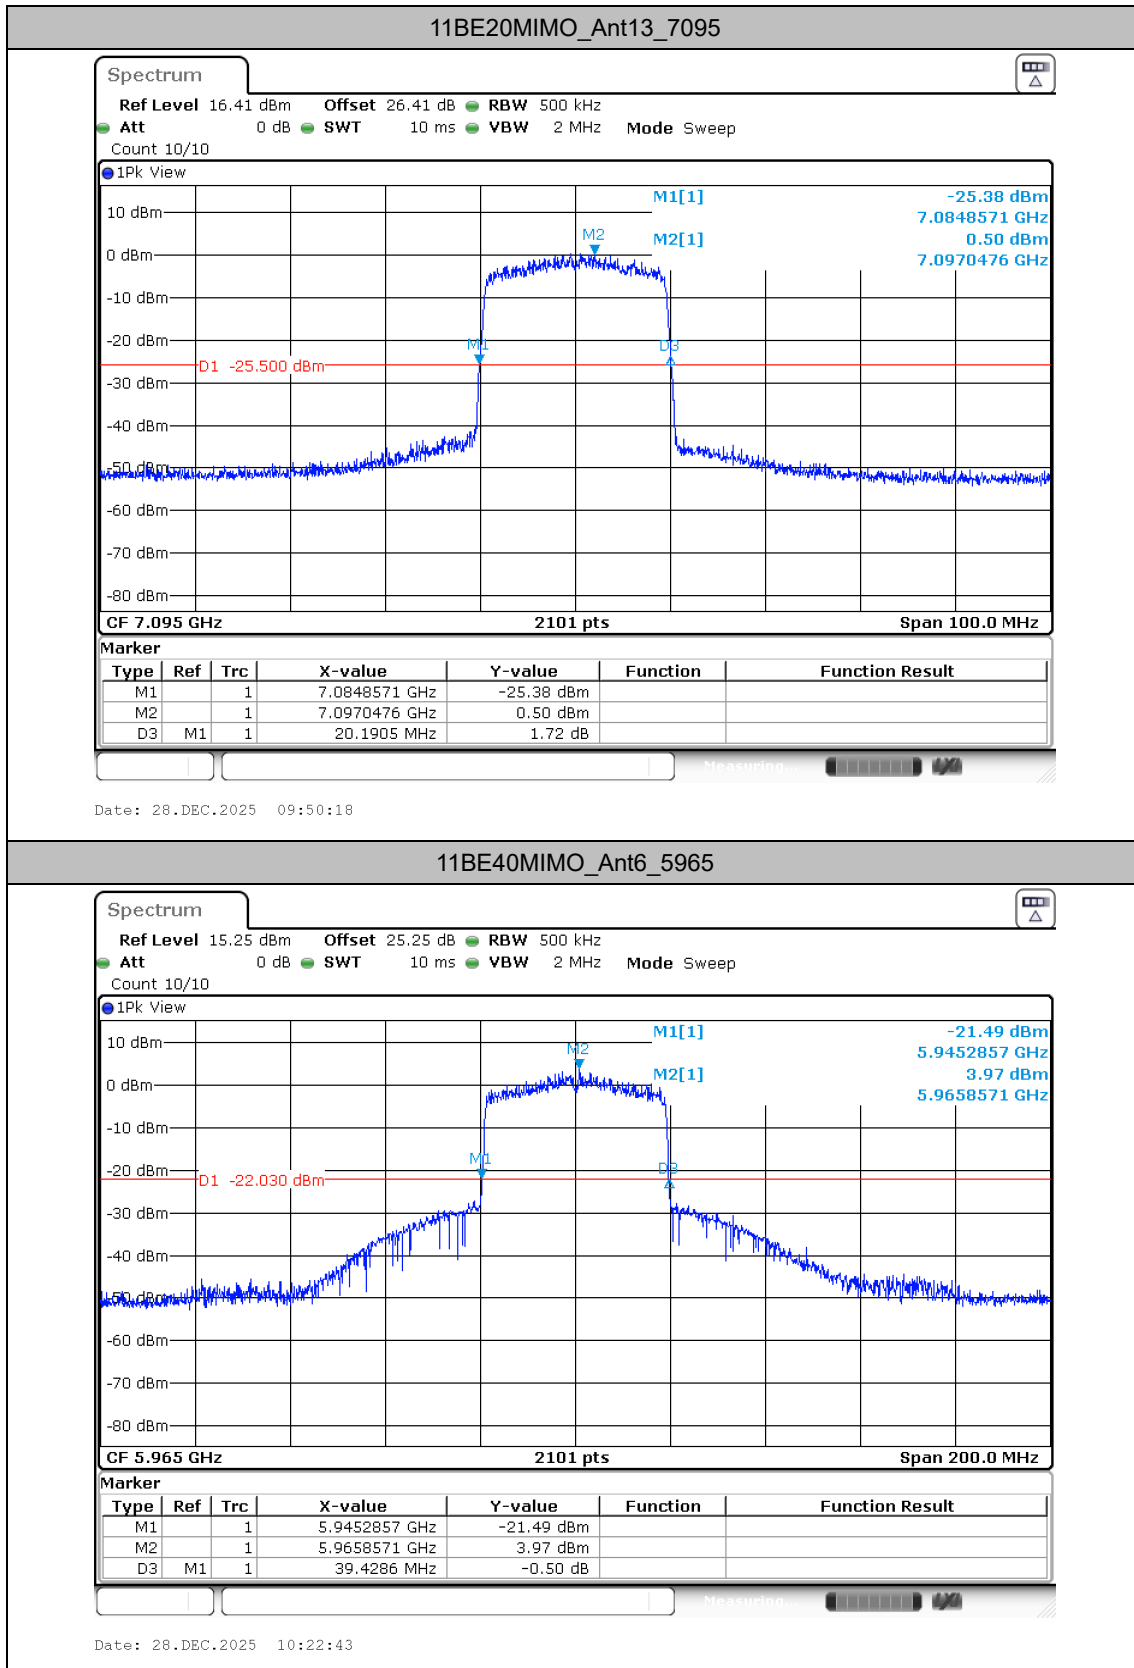


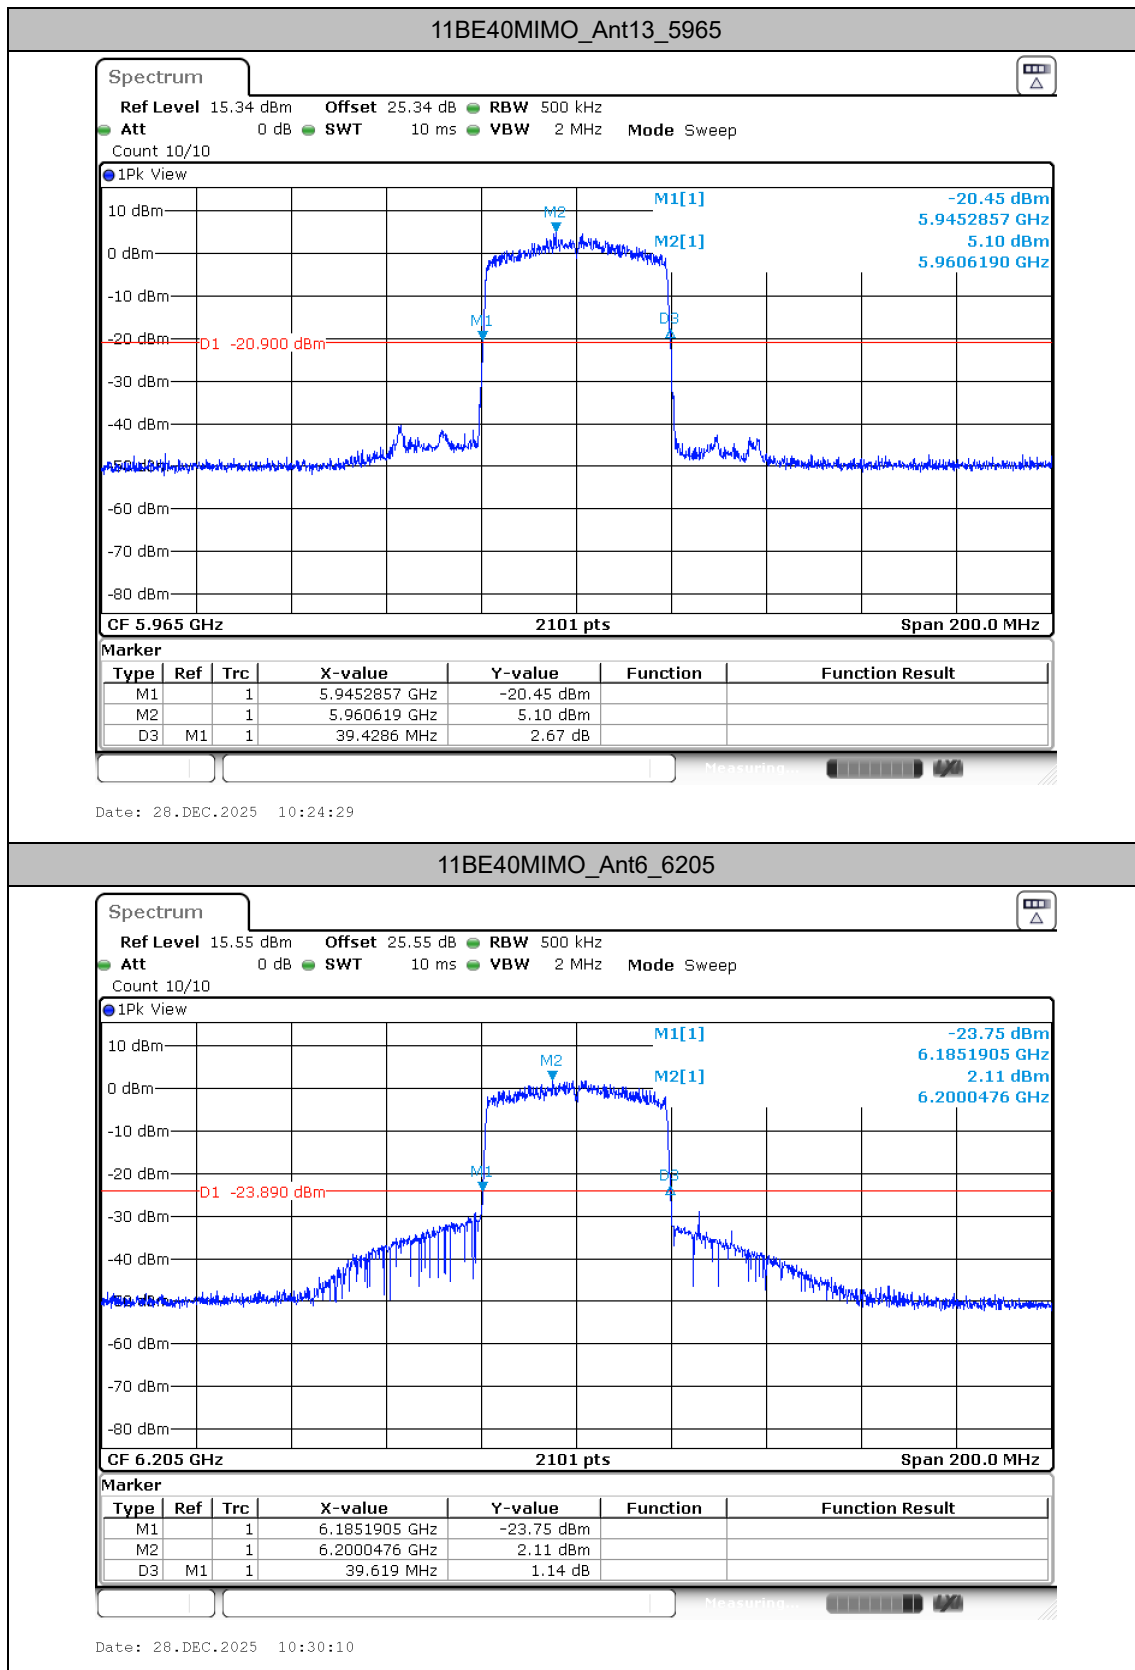


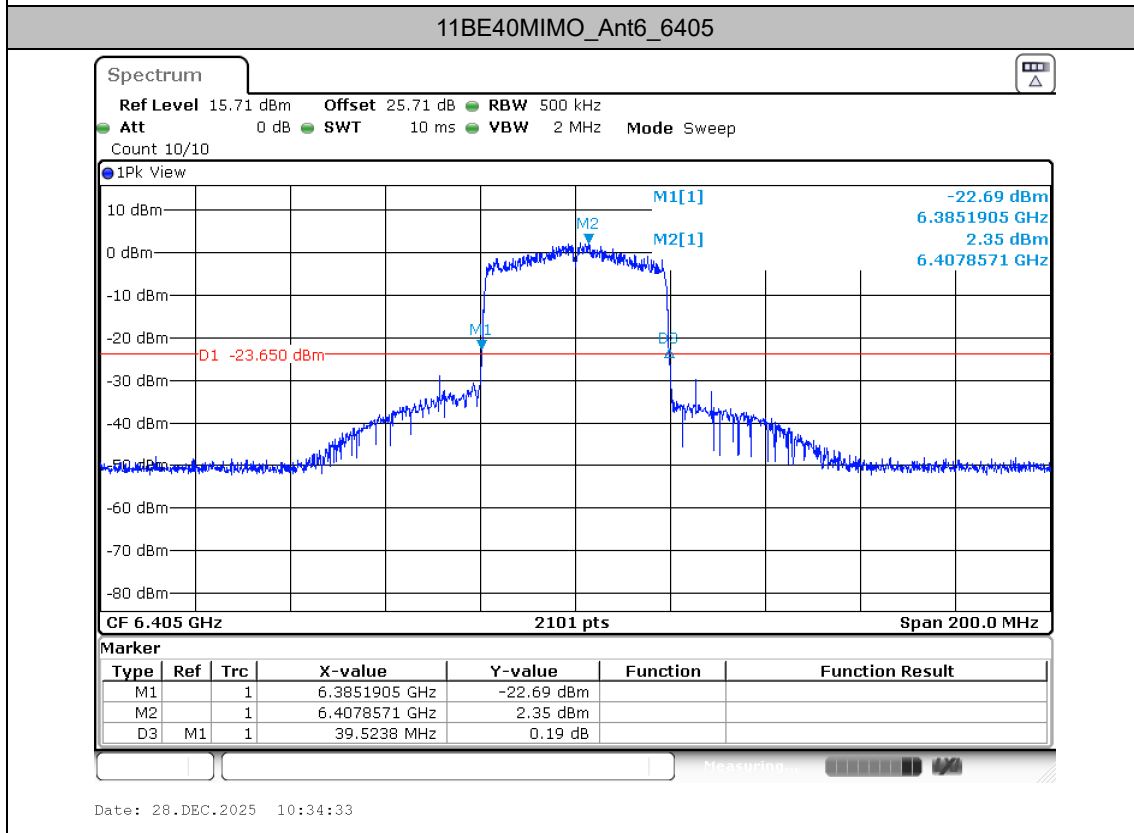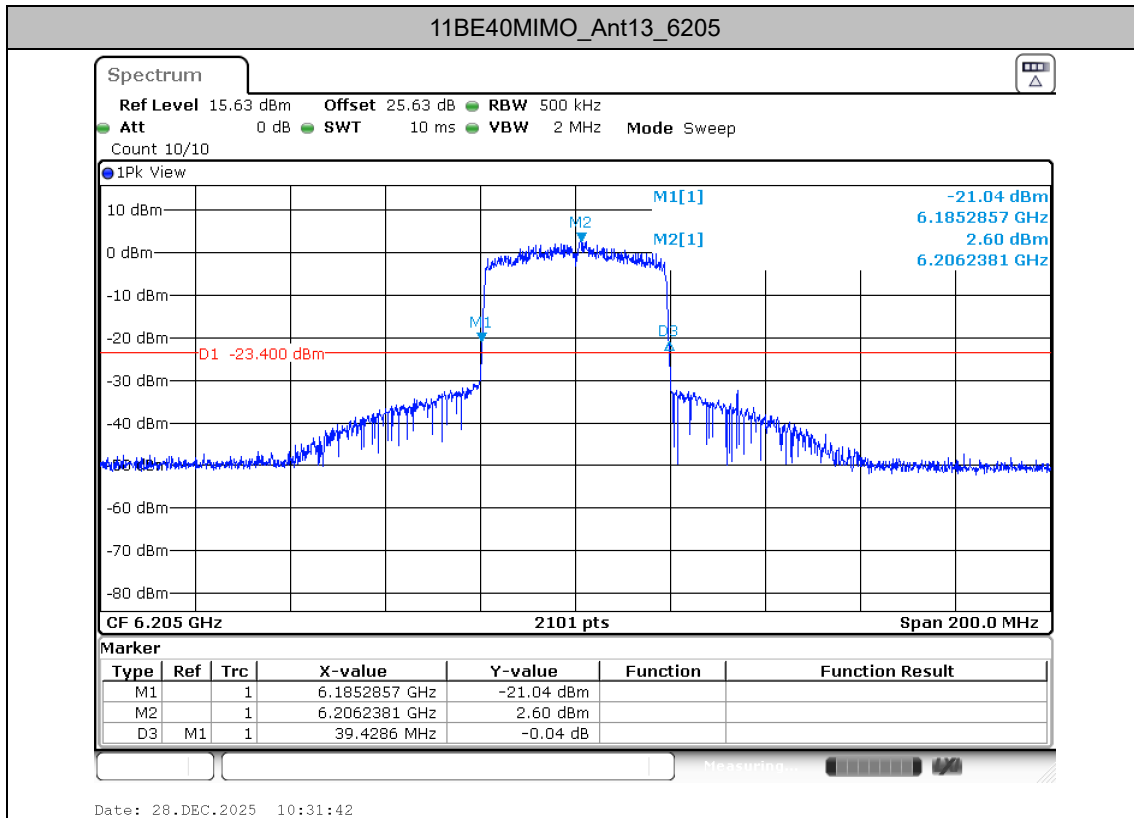



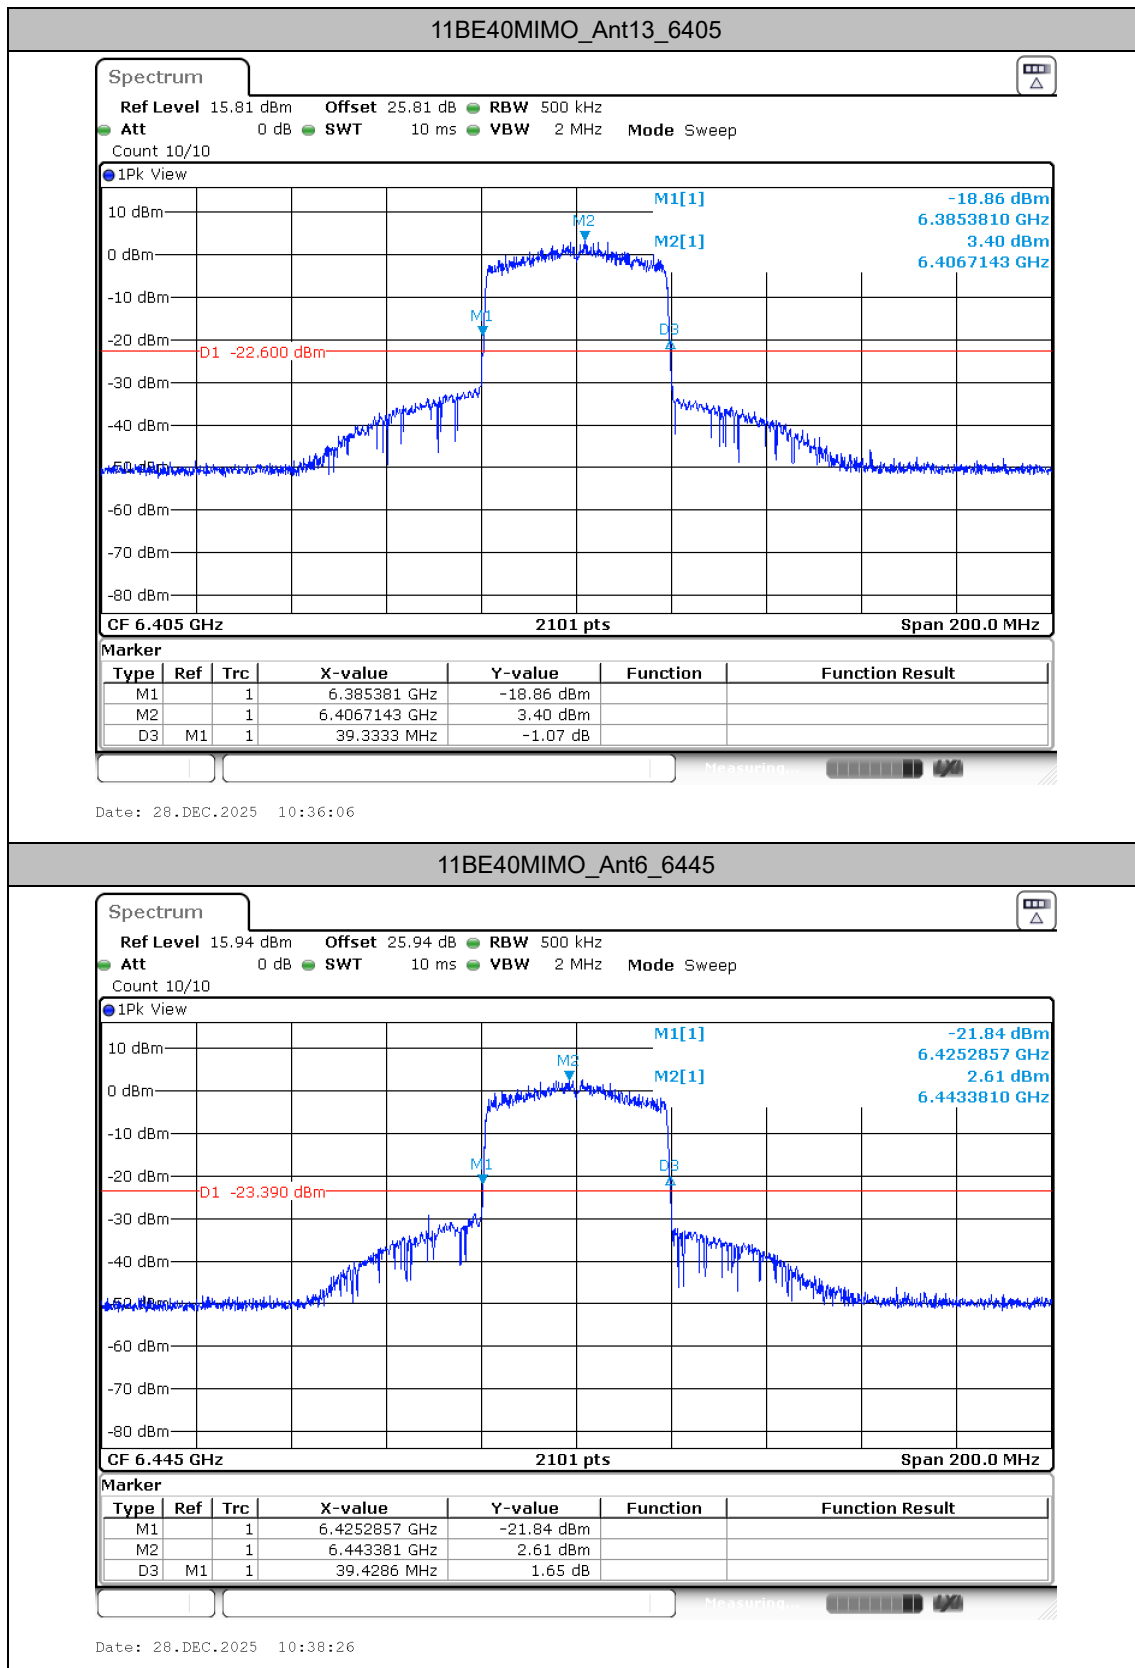



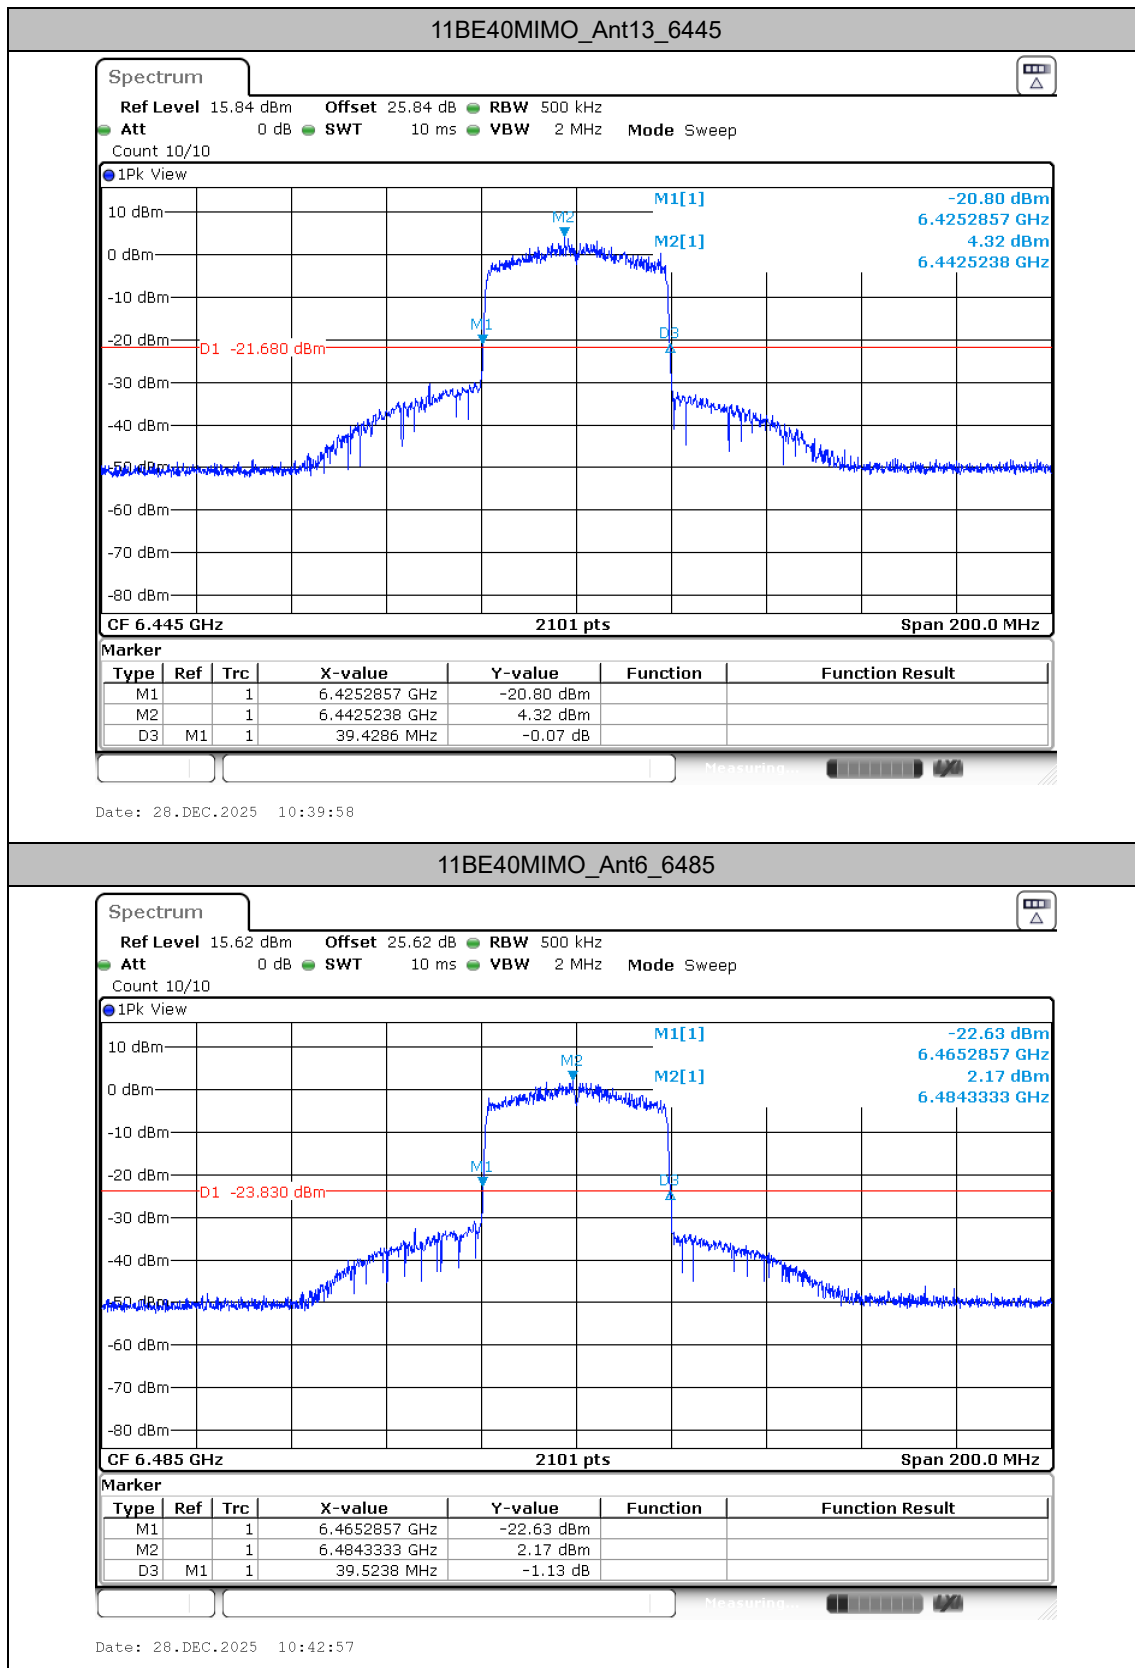


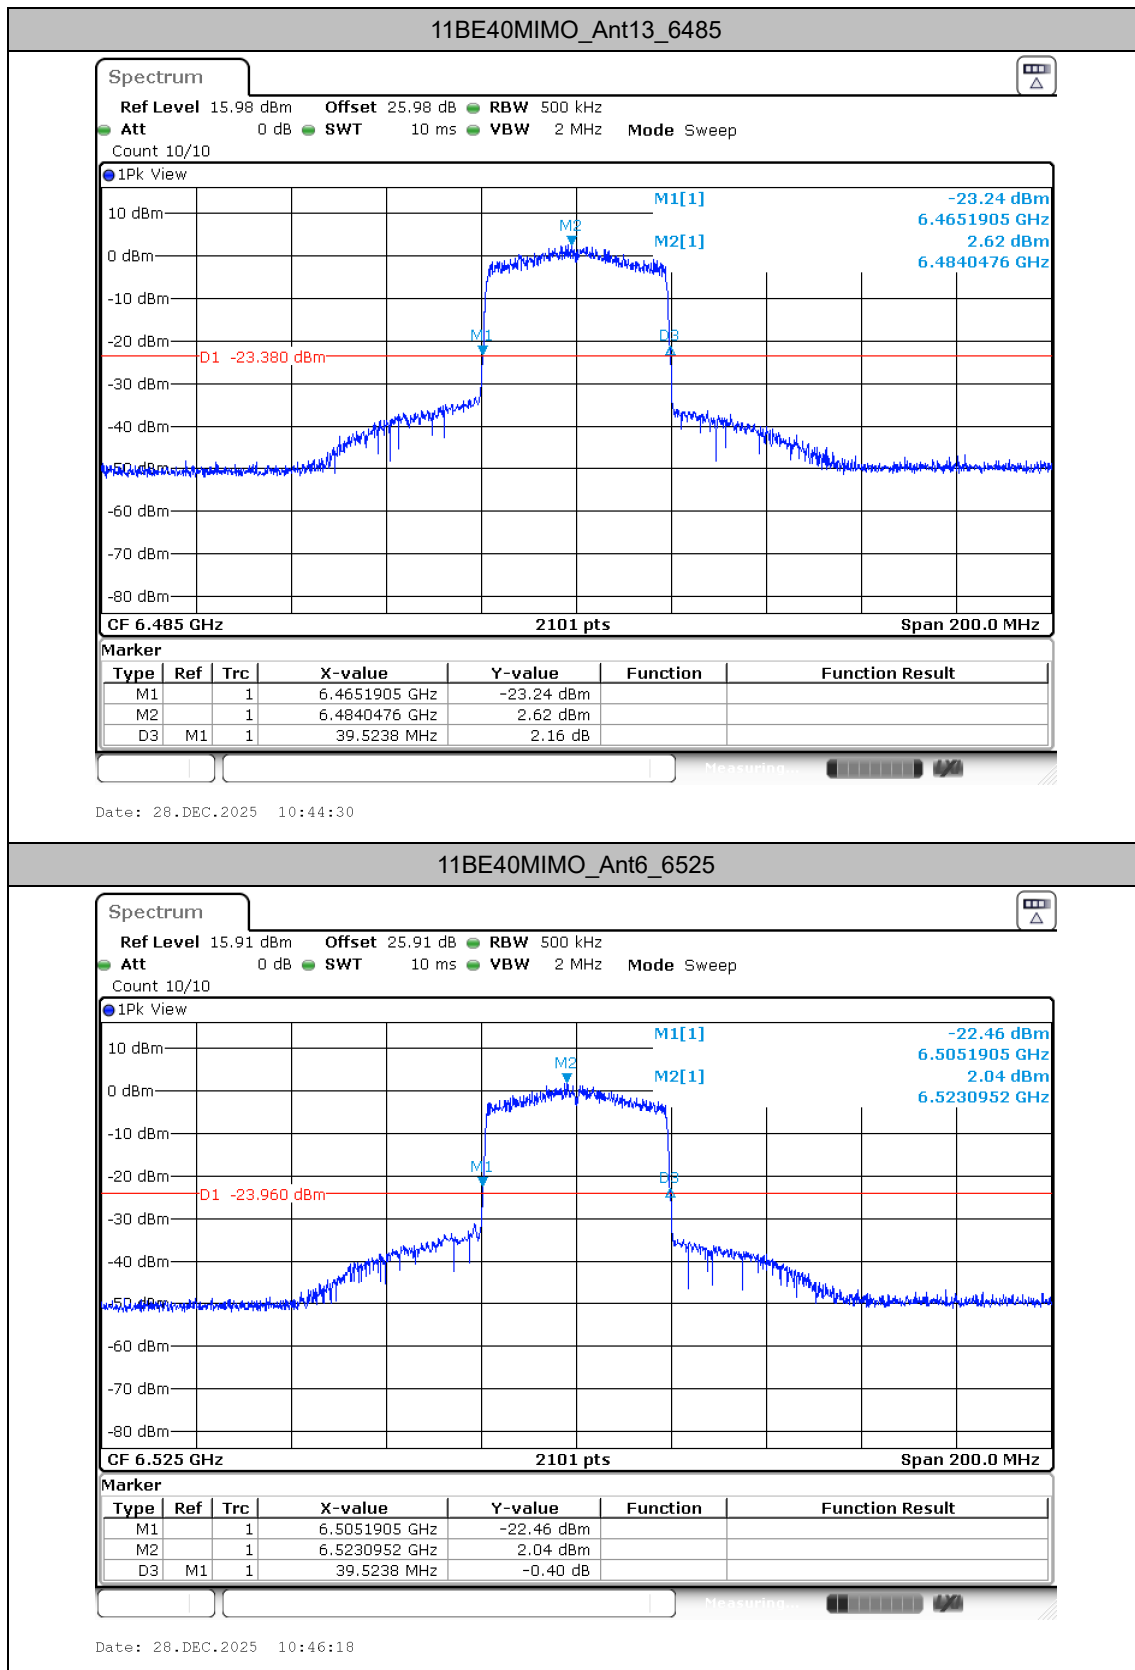


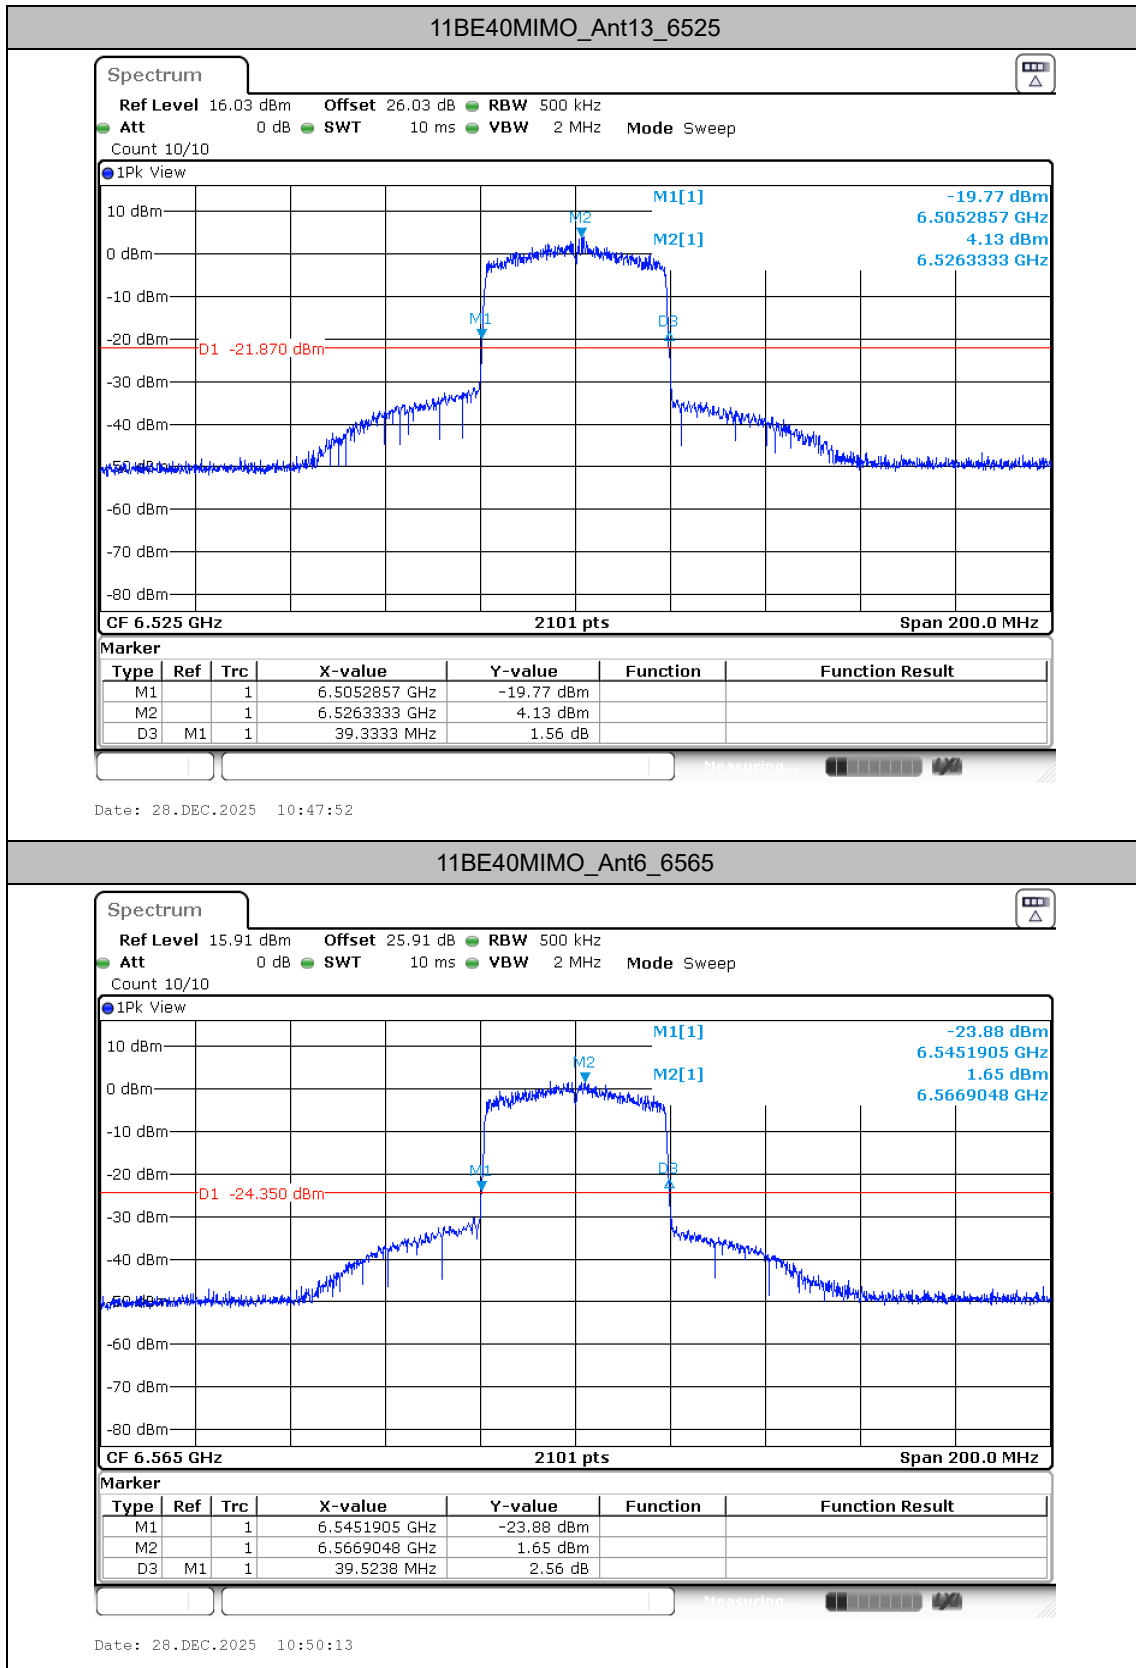


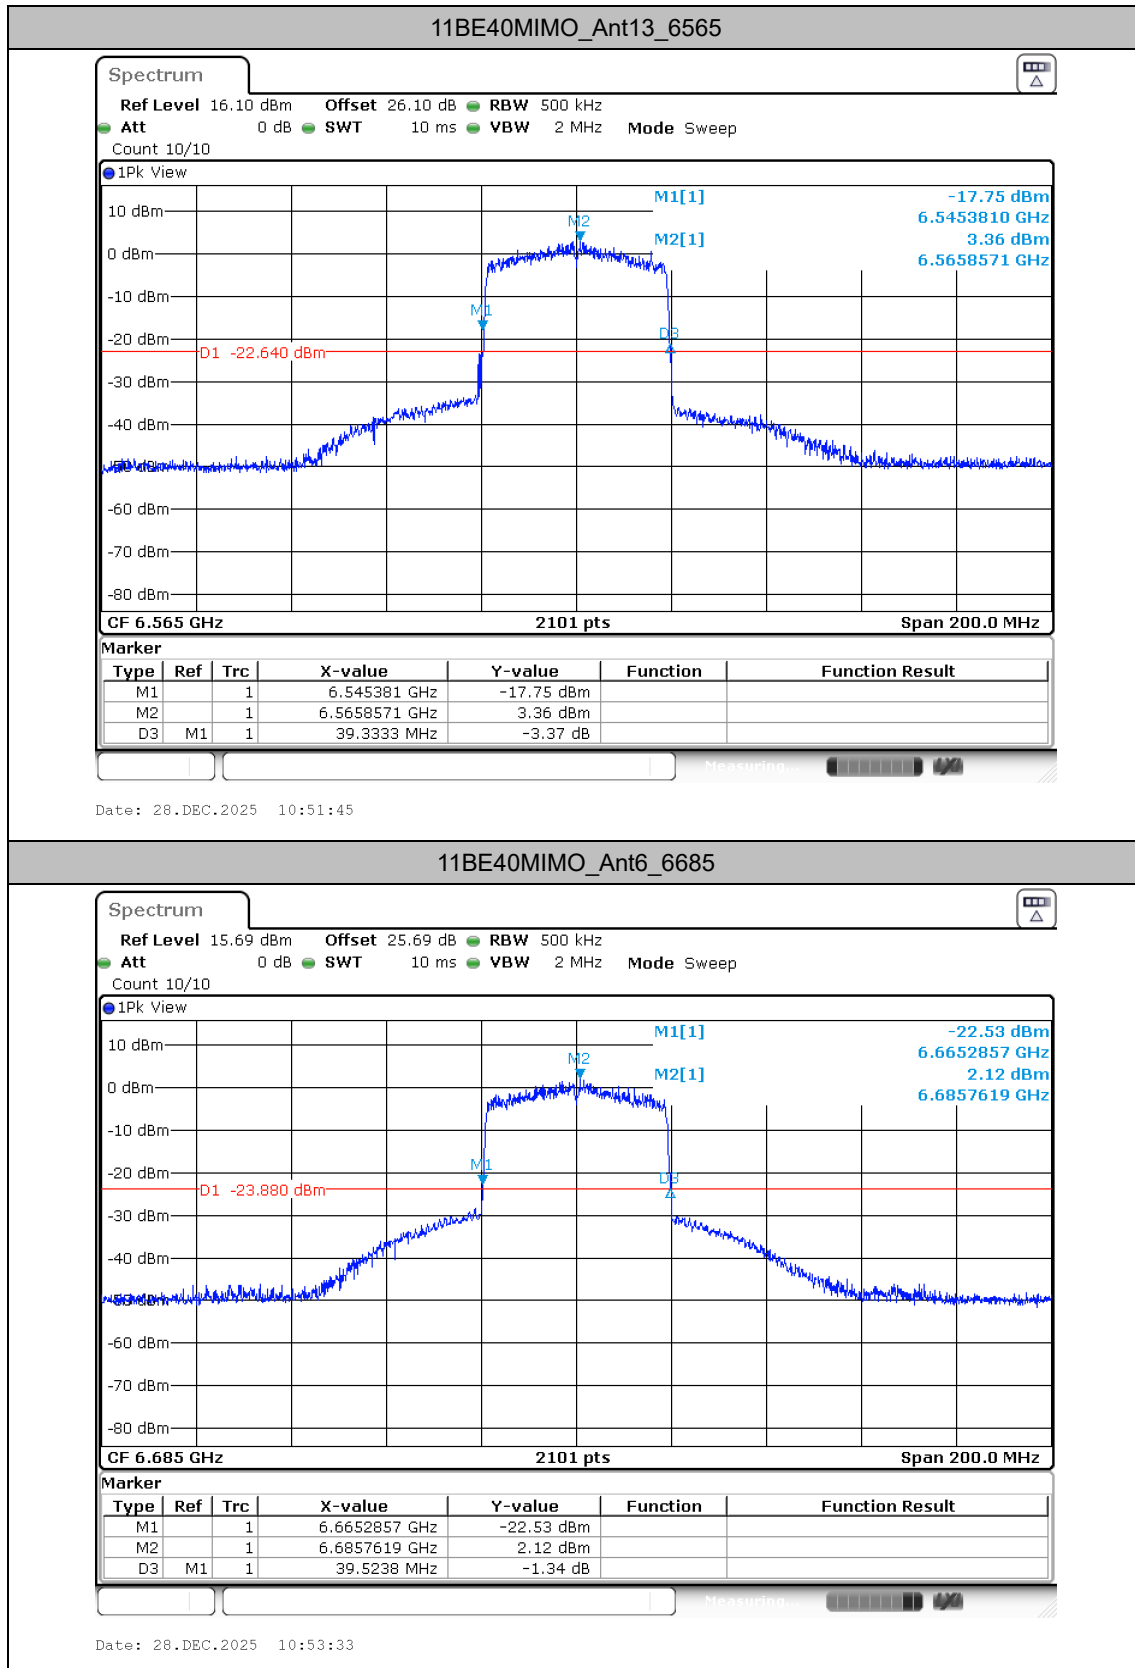


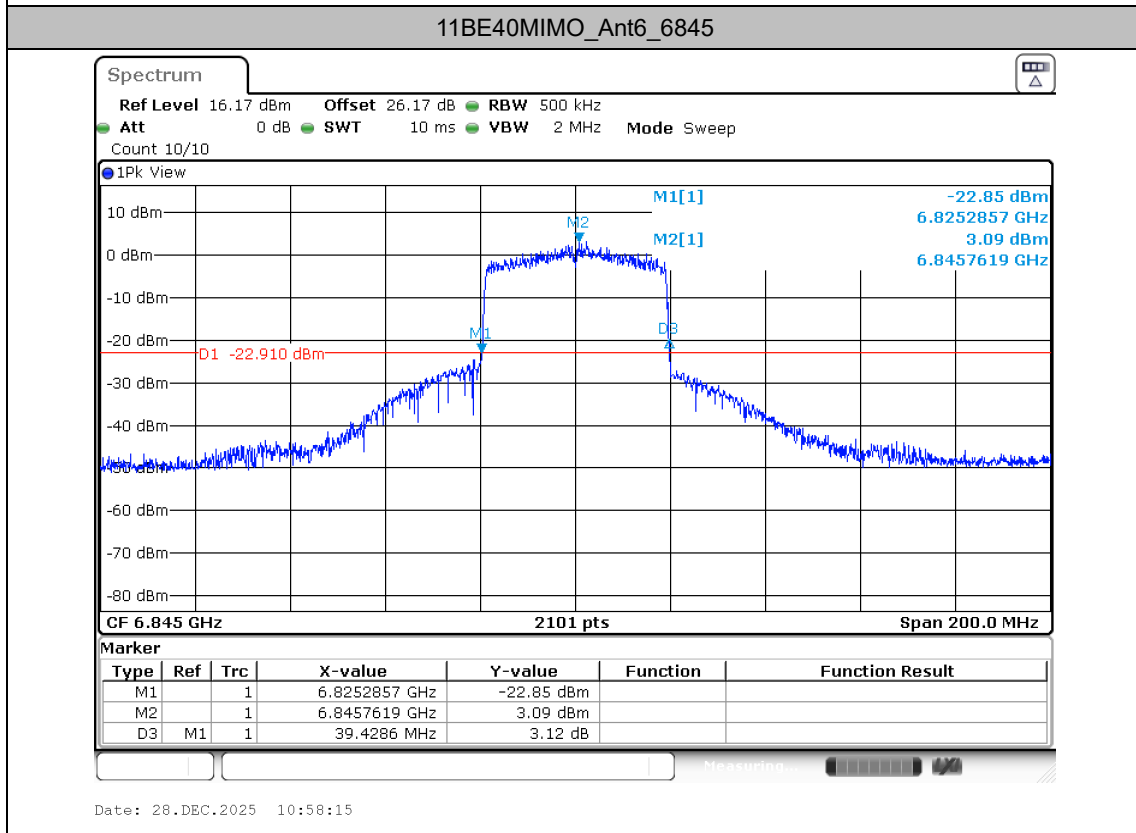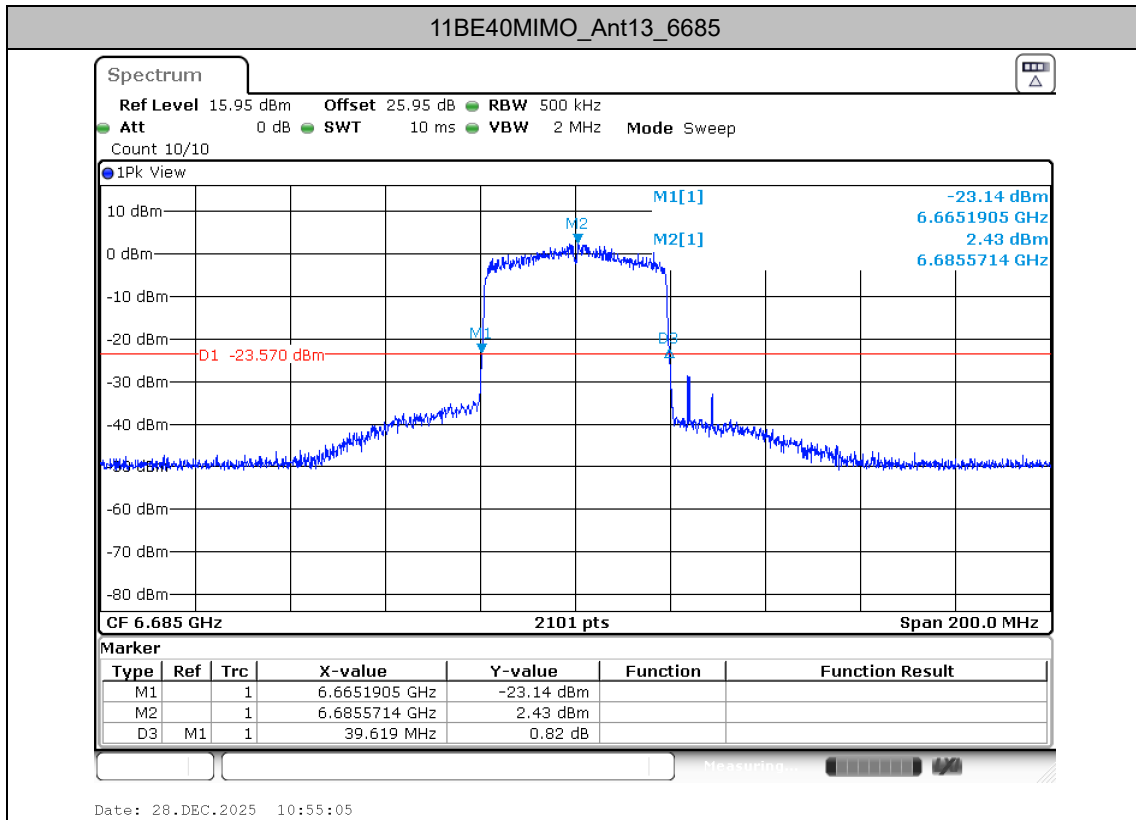


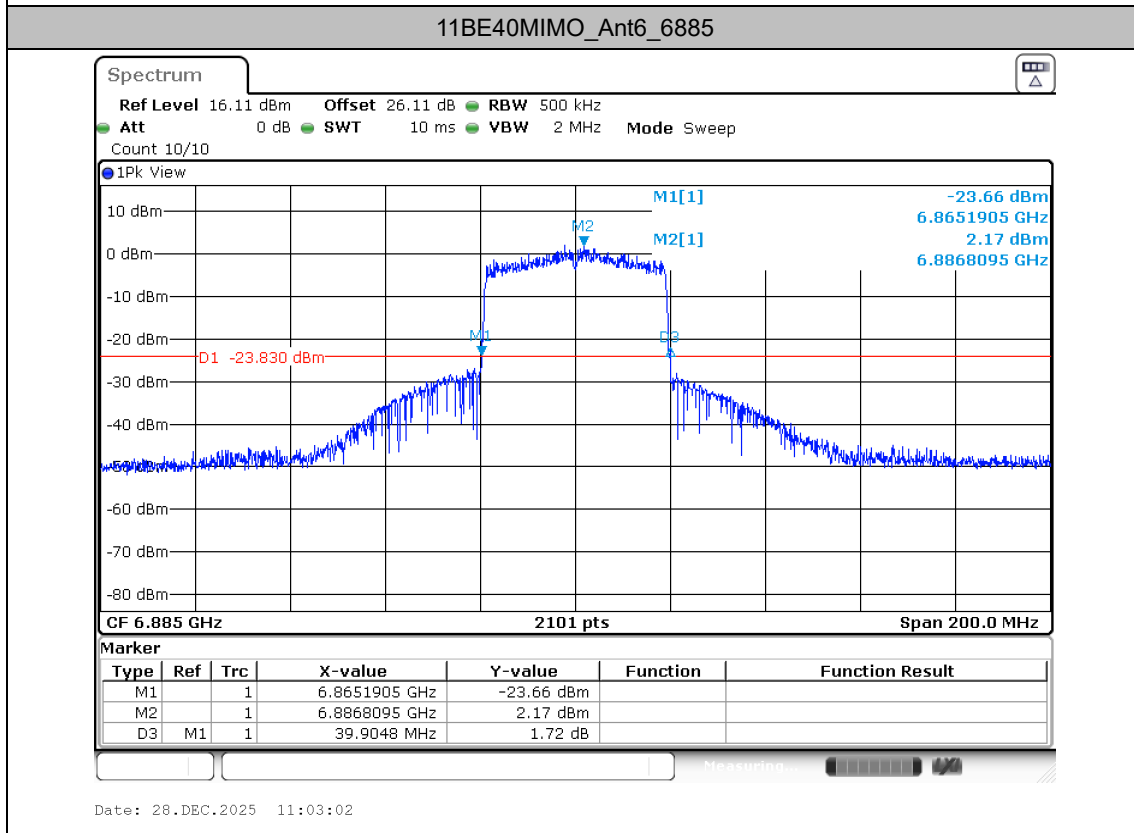
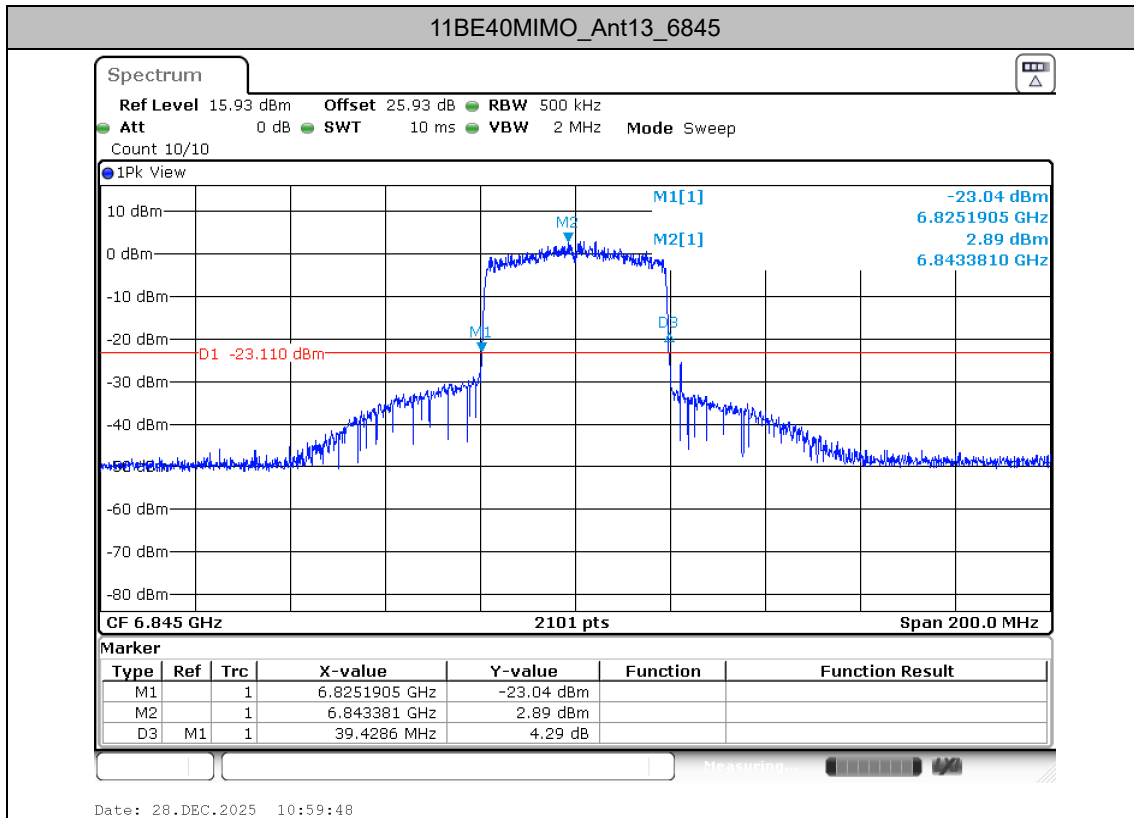


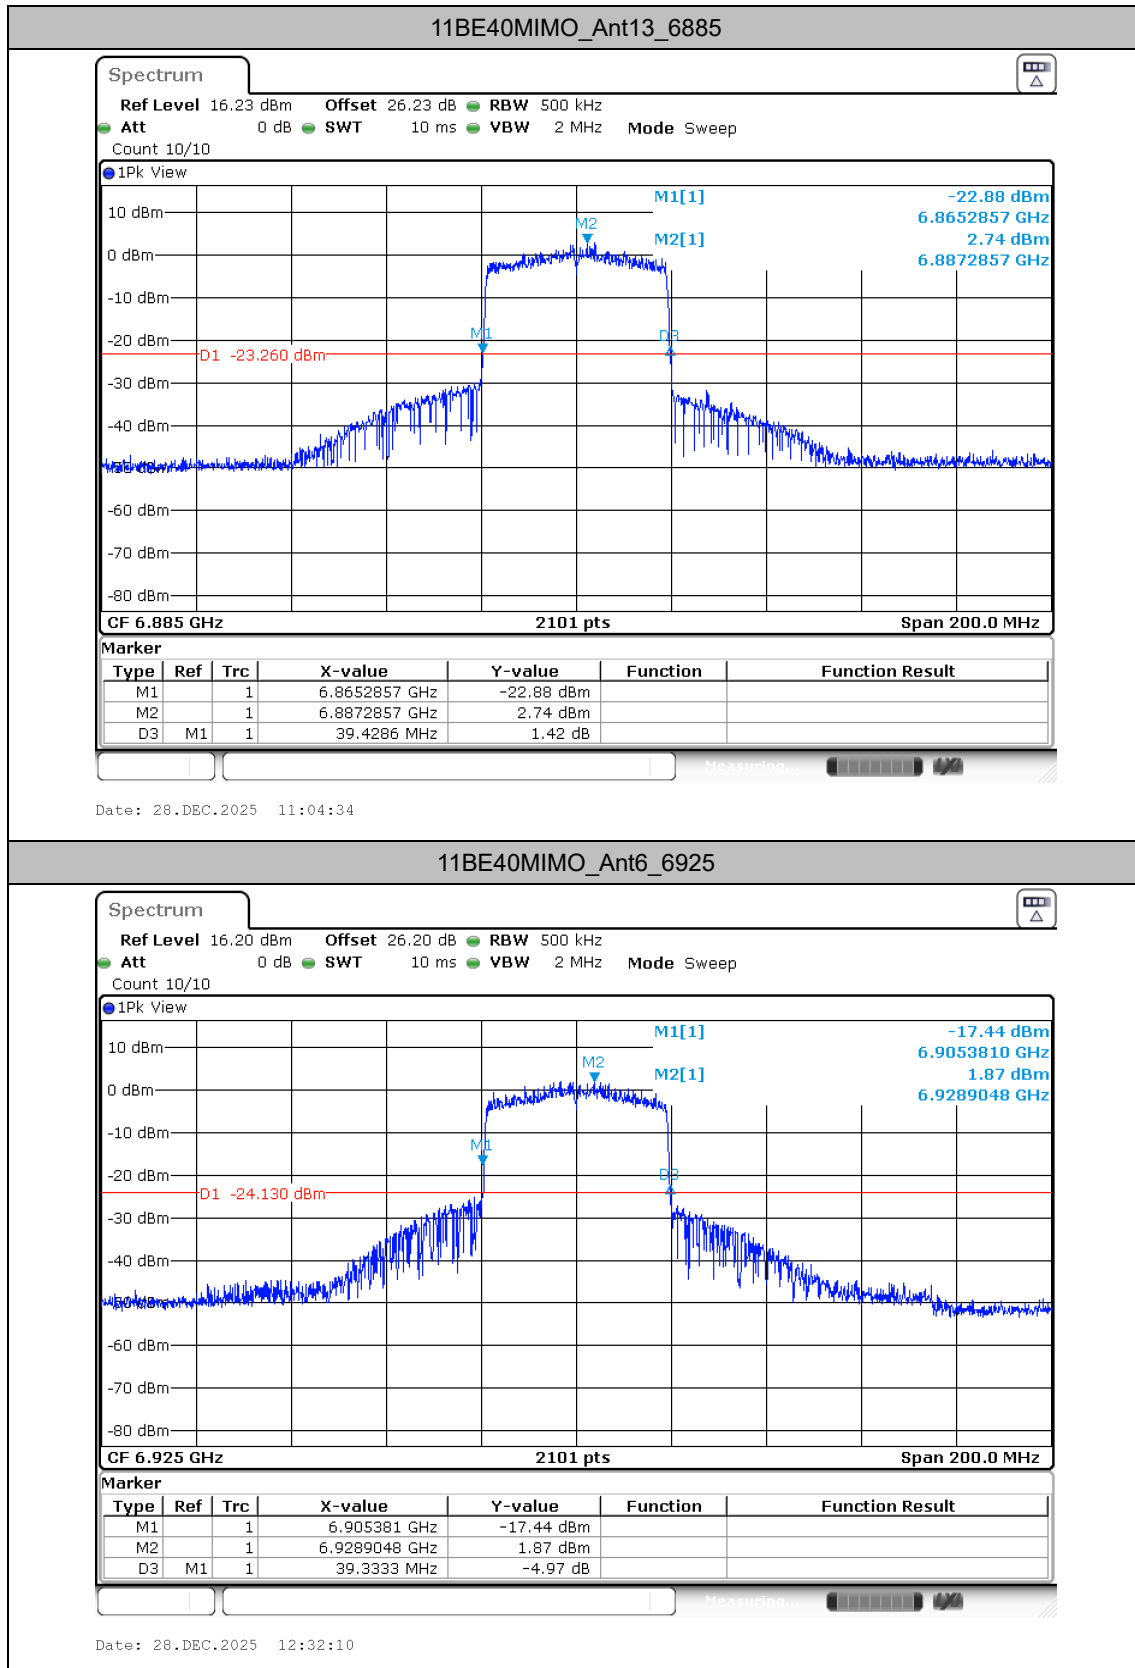


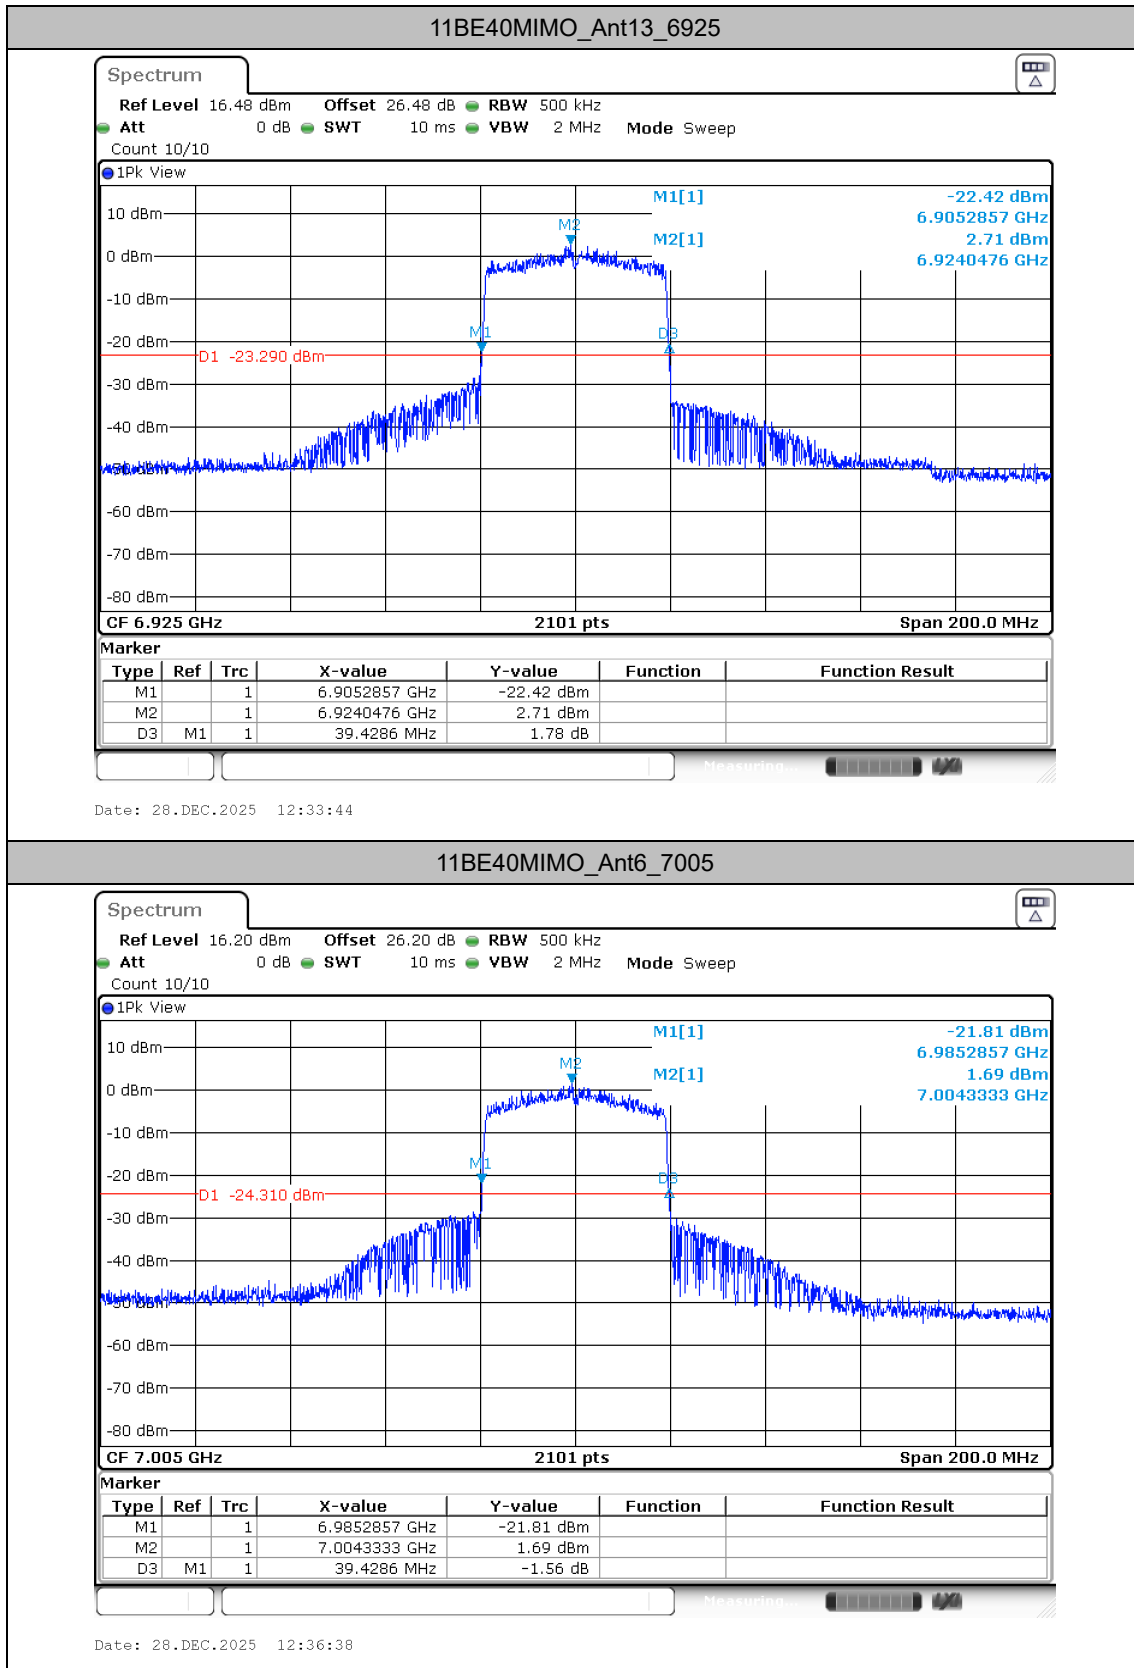


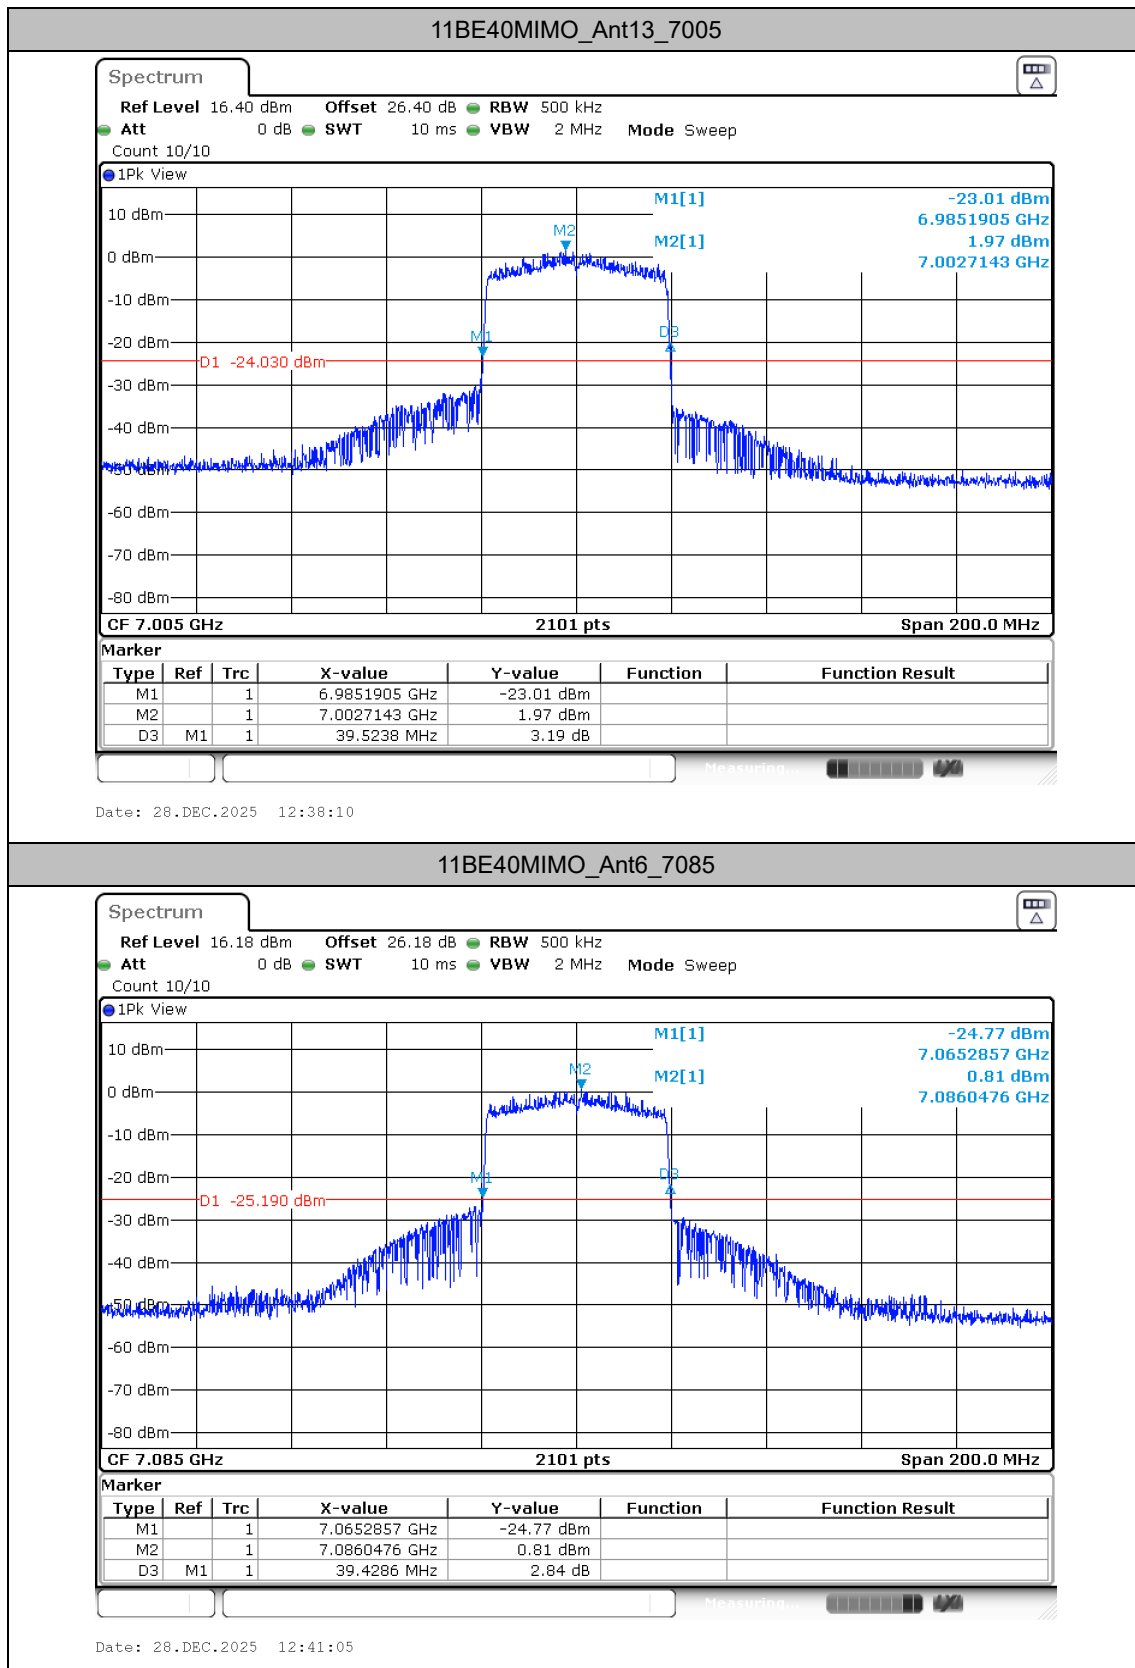


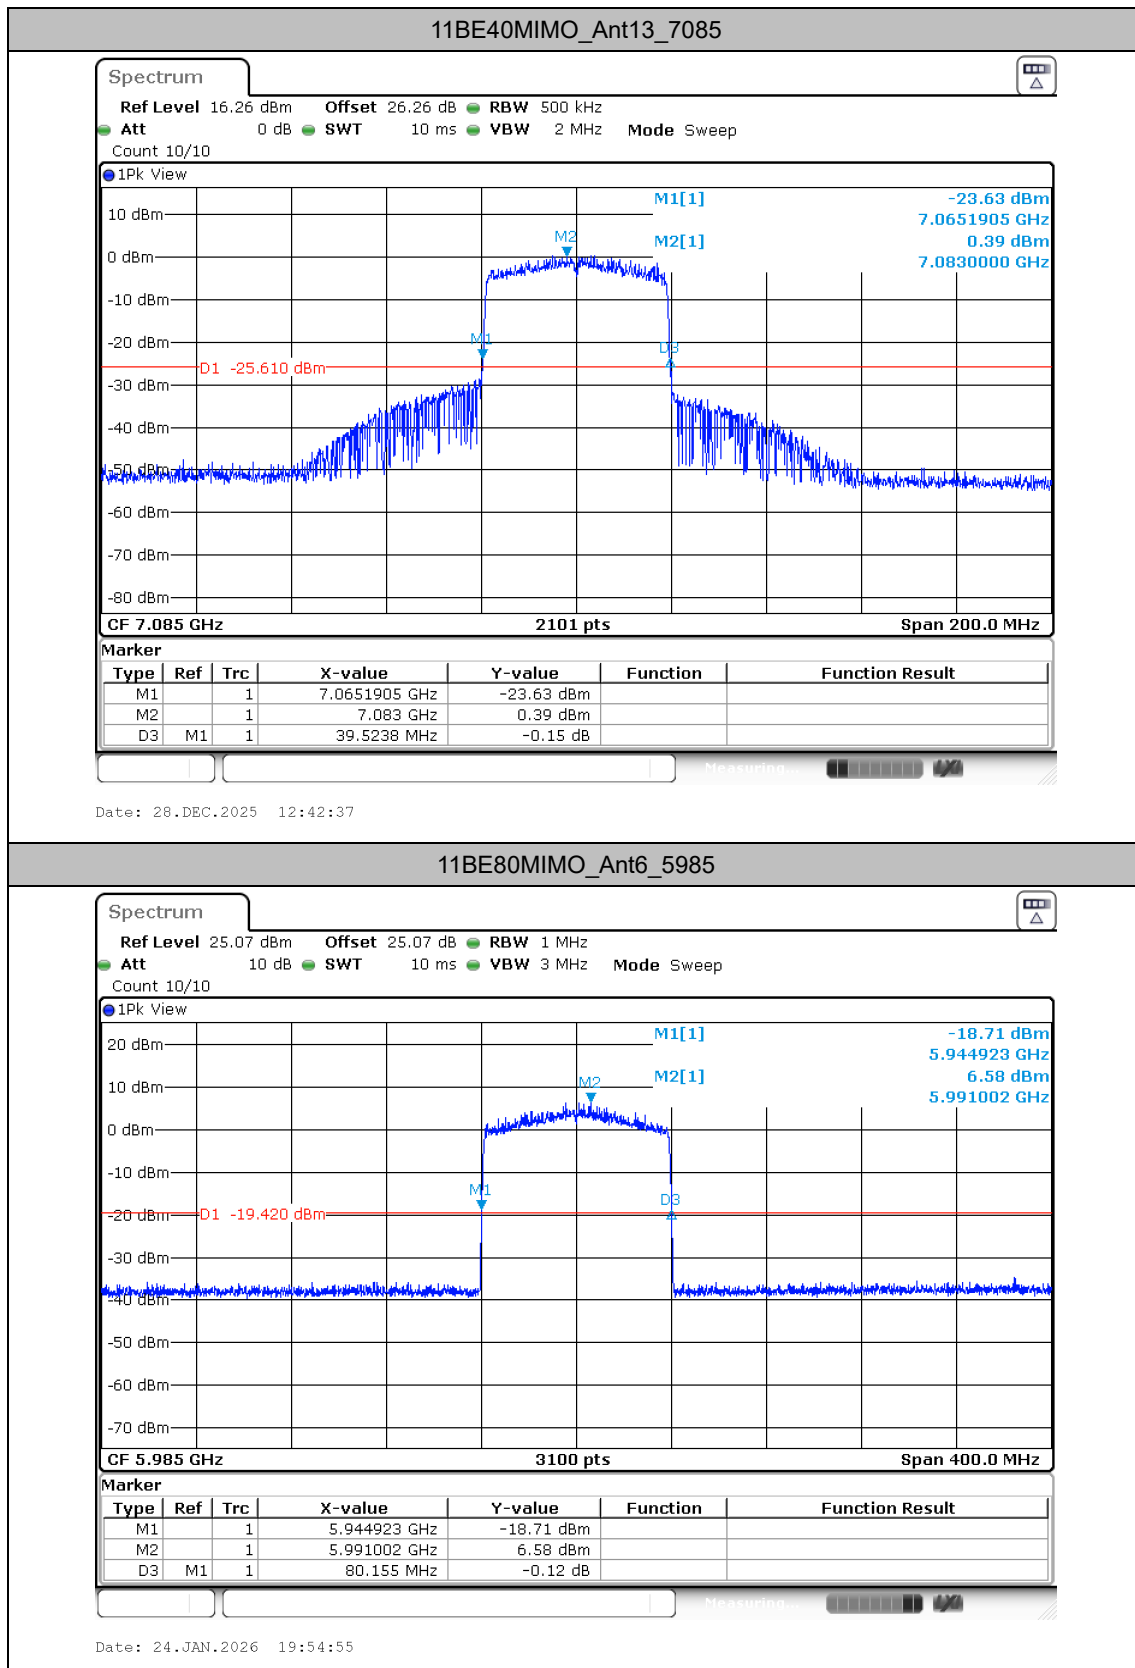

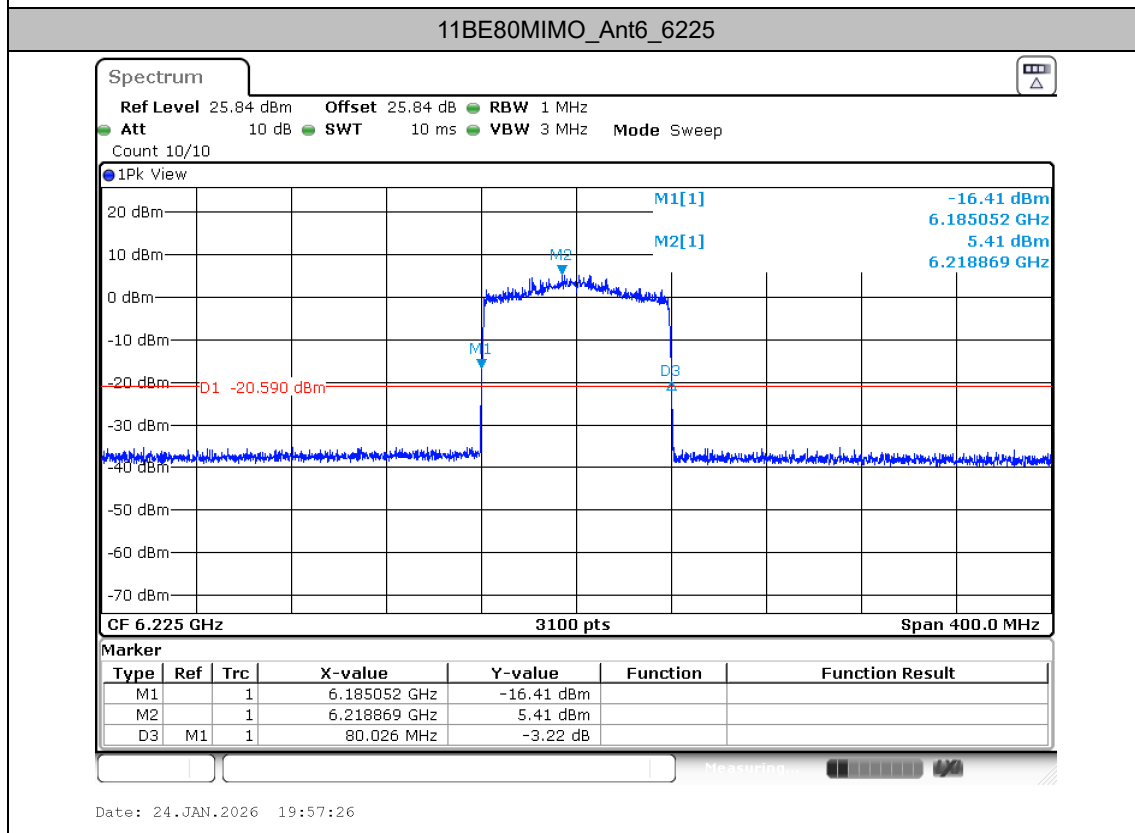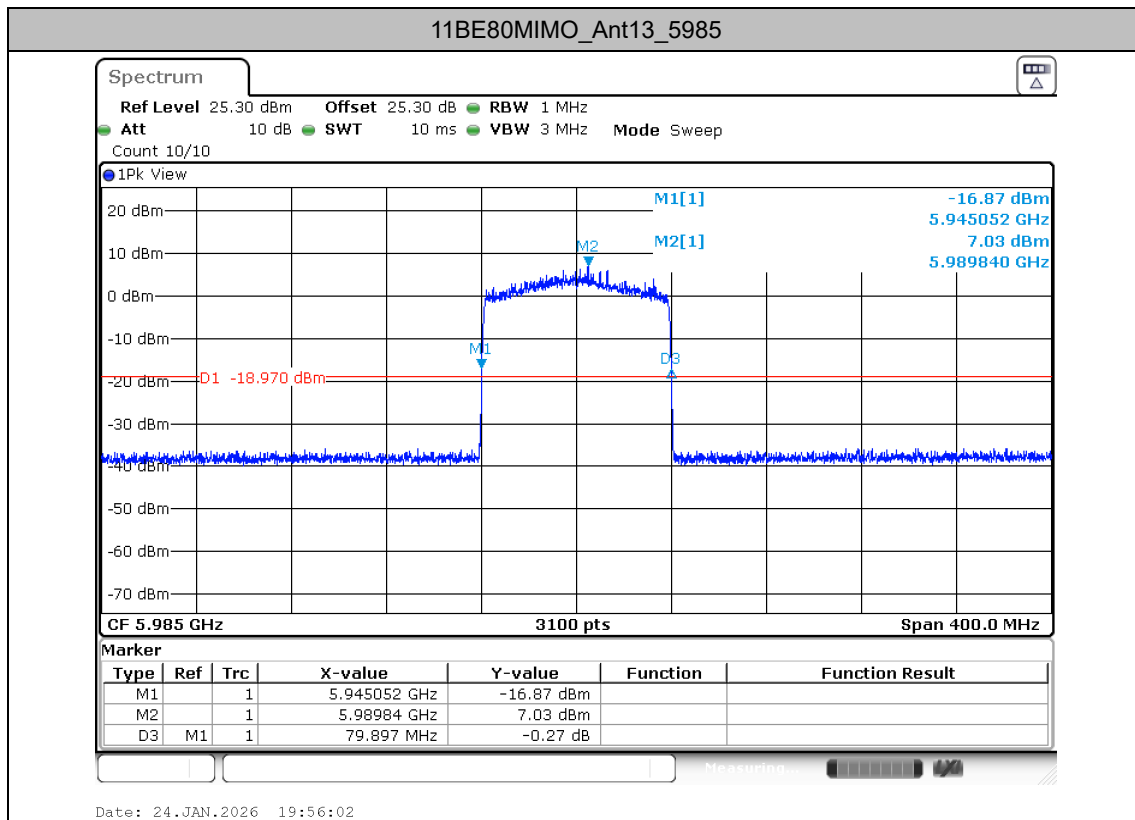


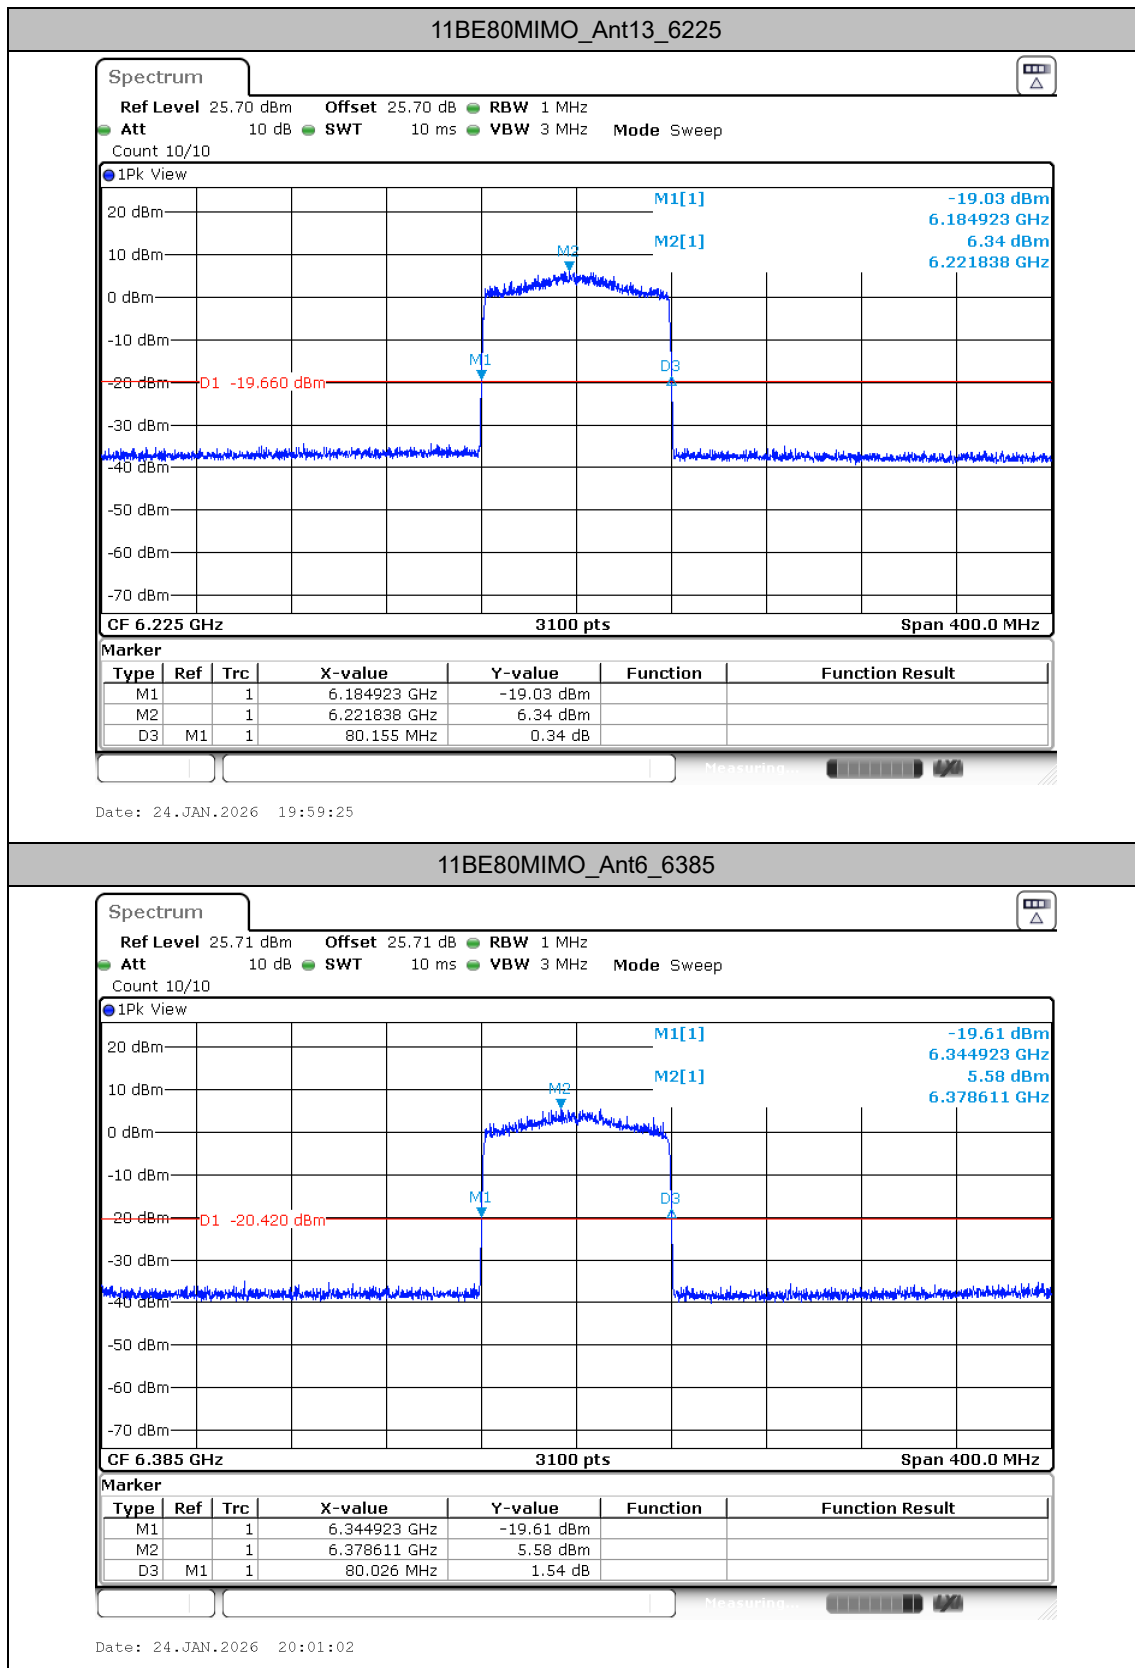

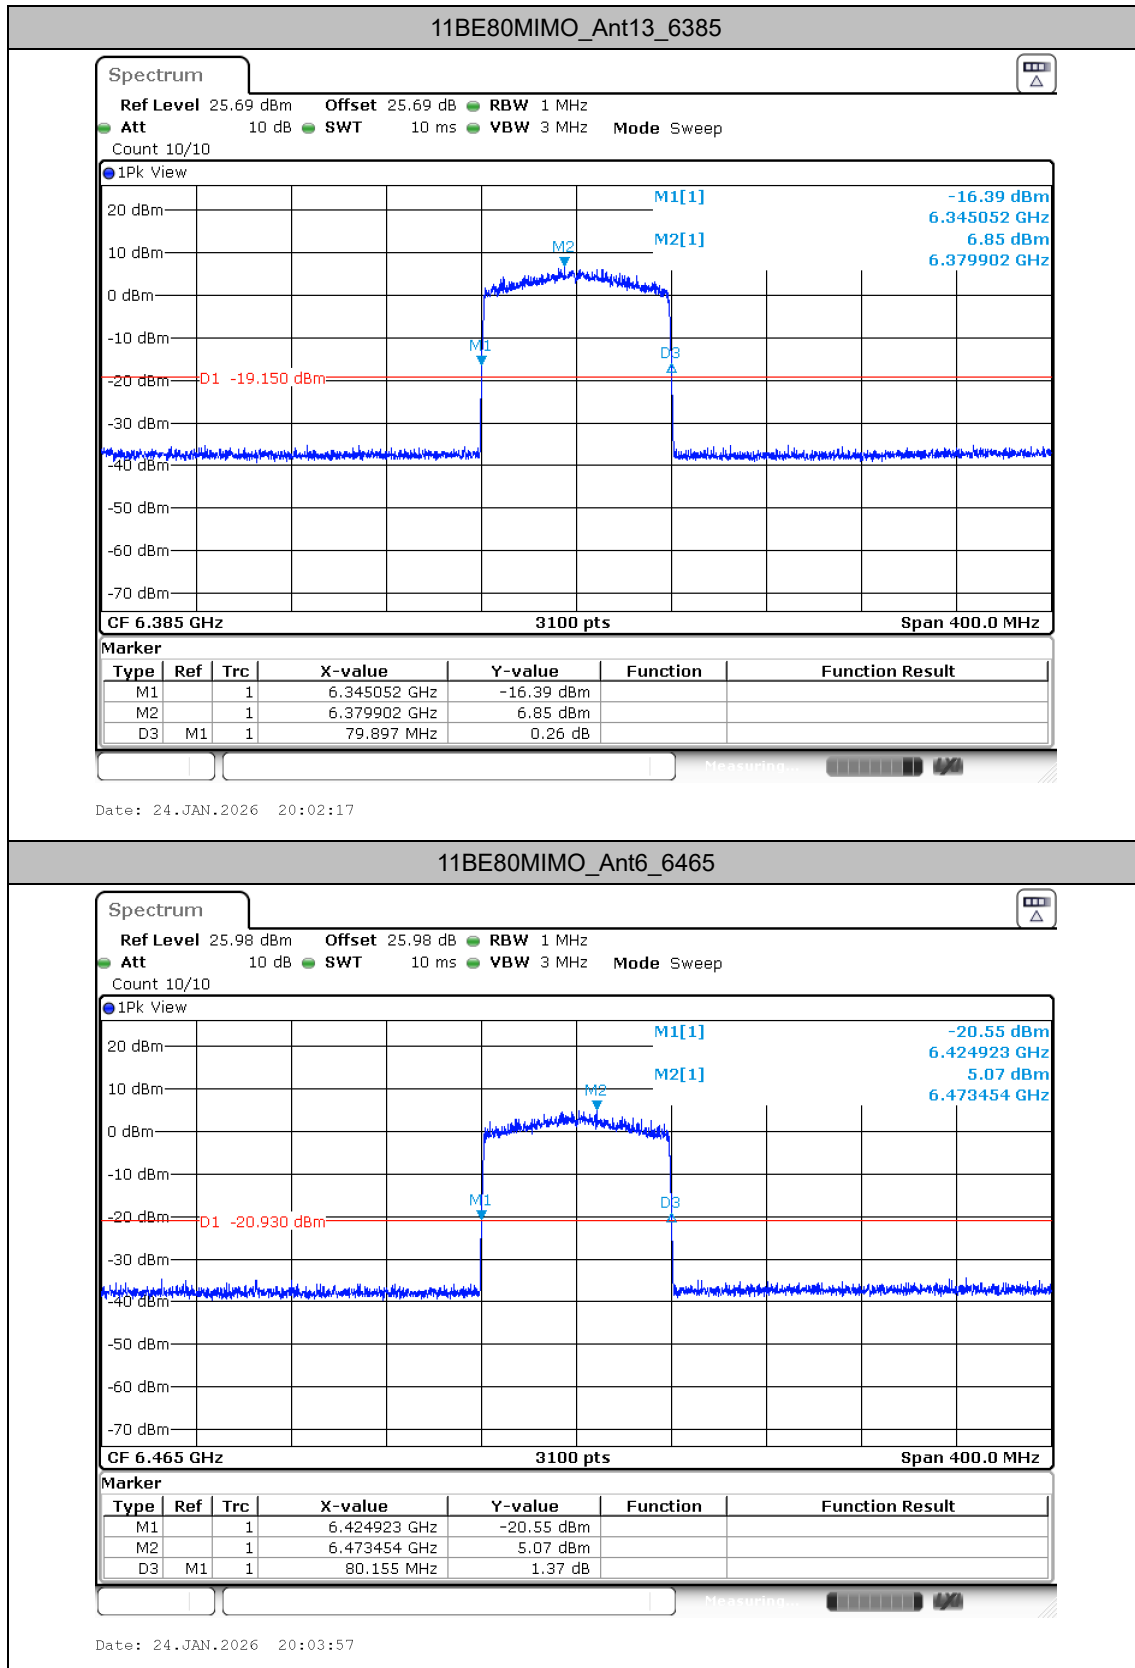


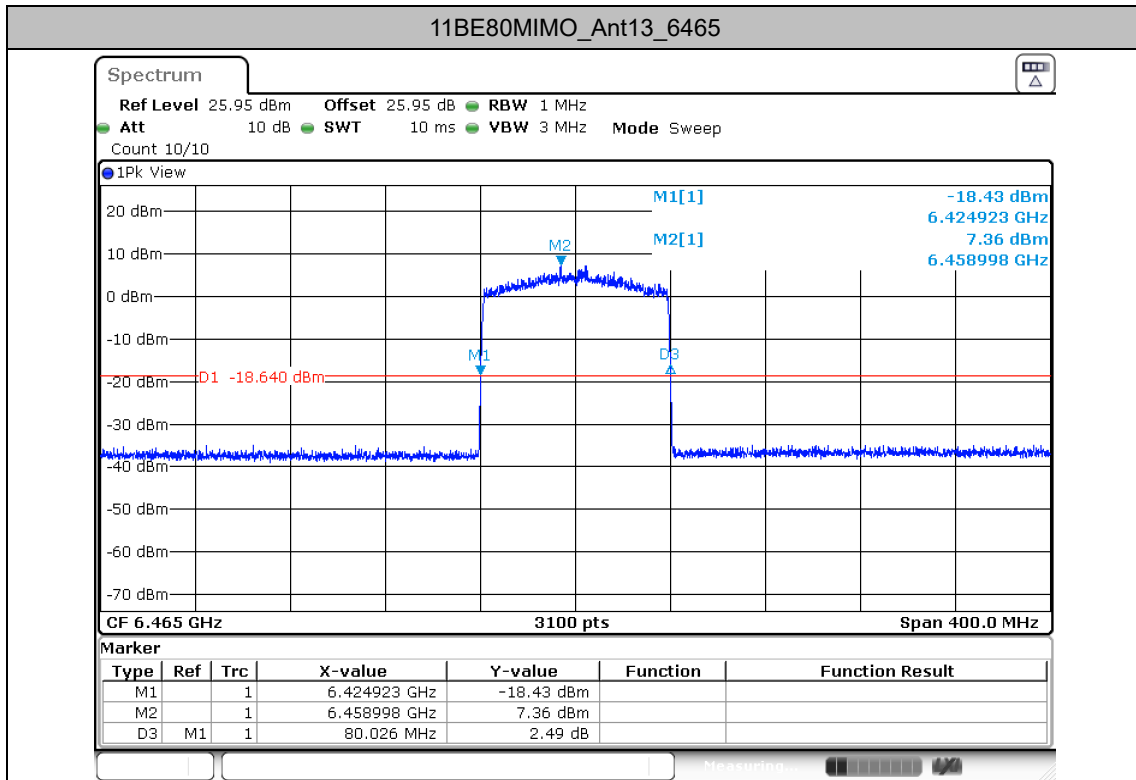




Date: 24.JAN.2026 20:05:12


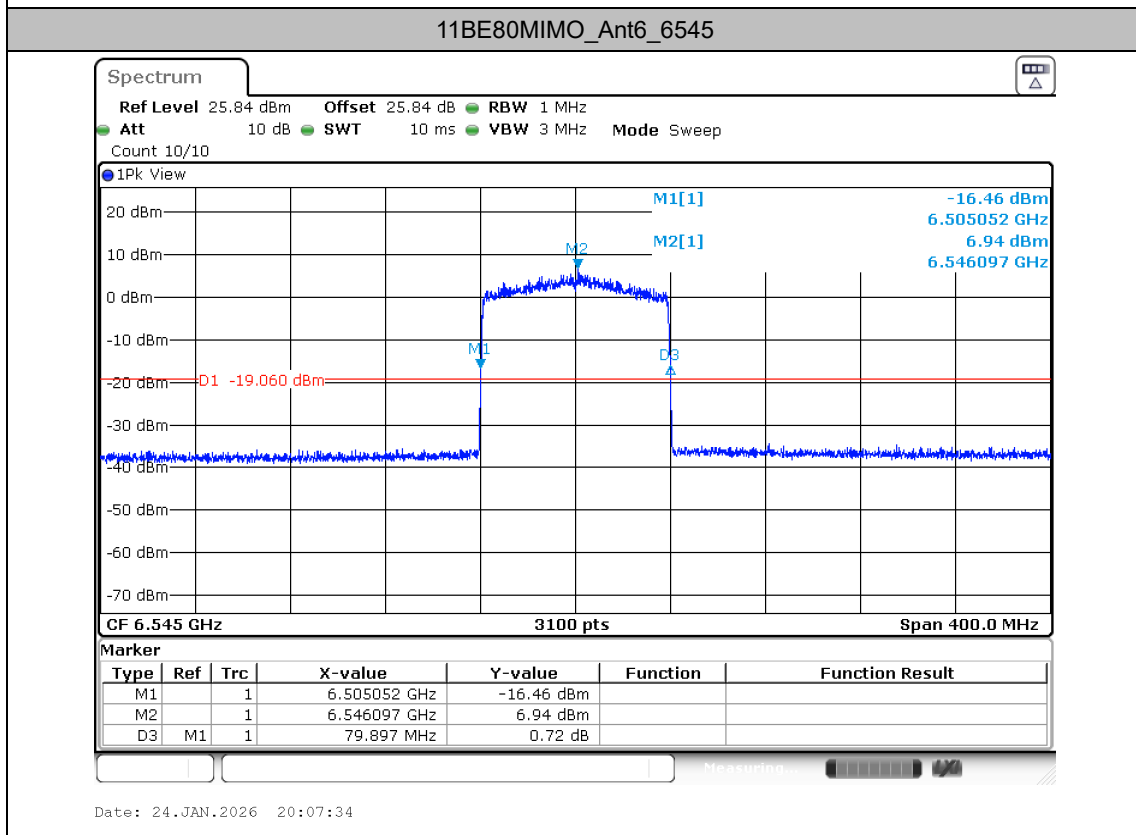



Date: 24.JAN.2026 20:07:34


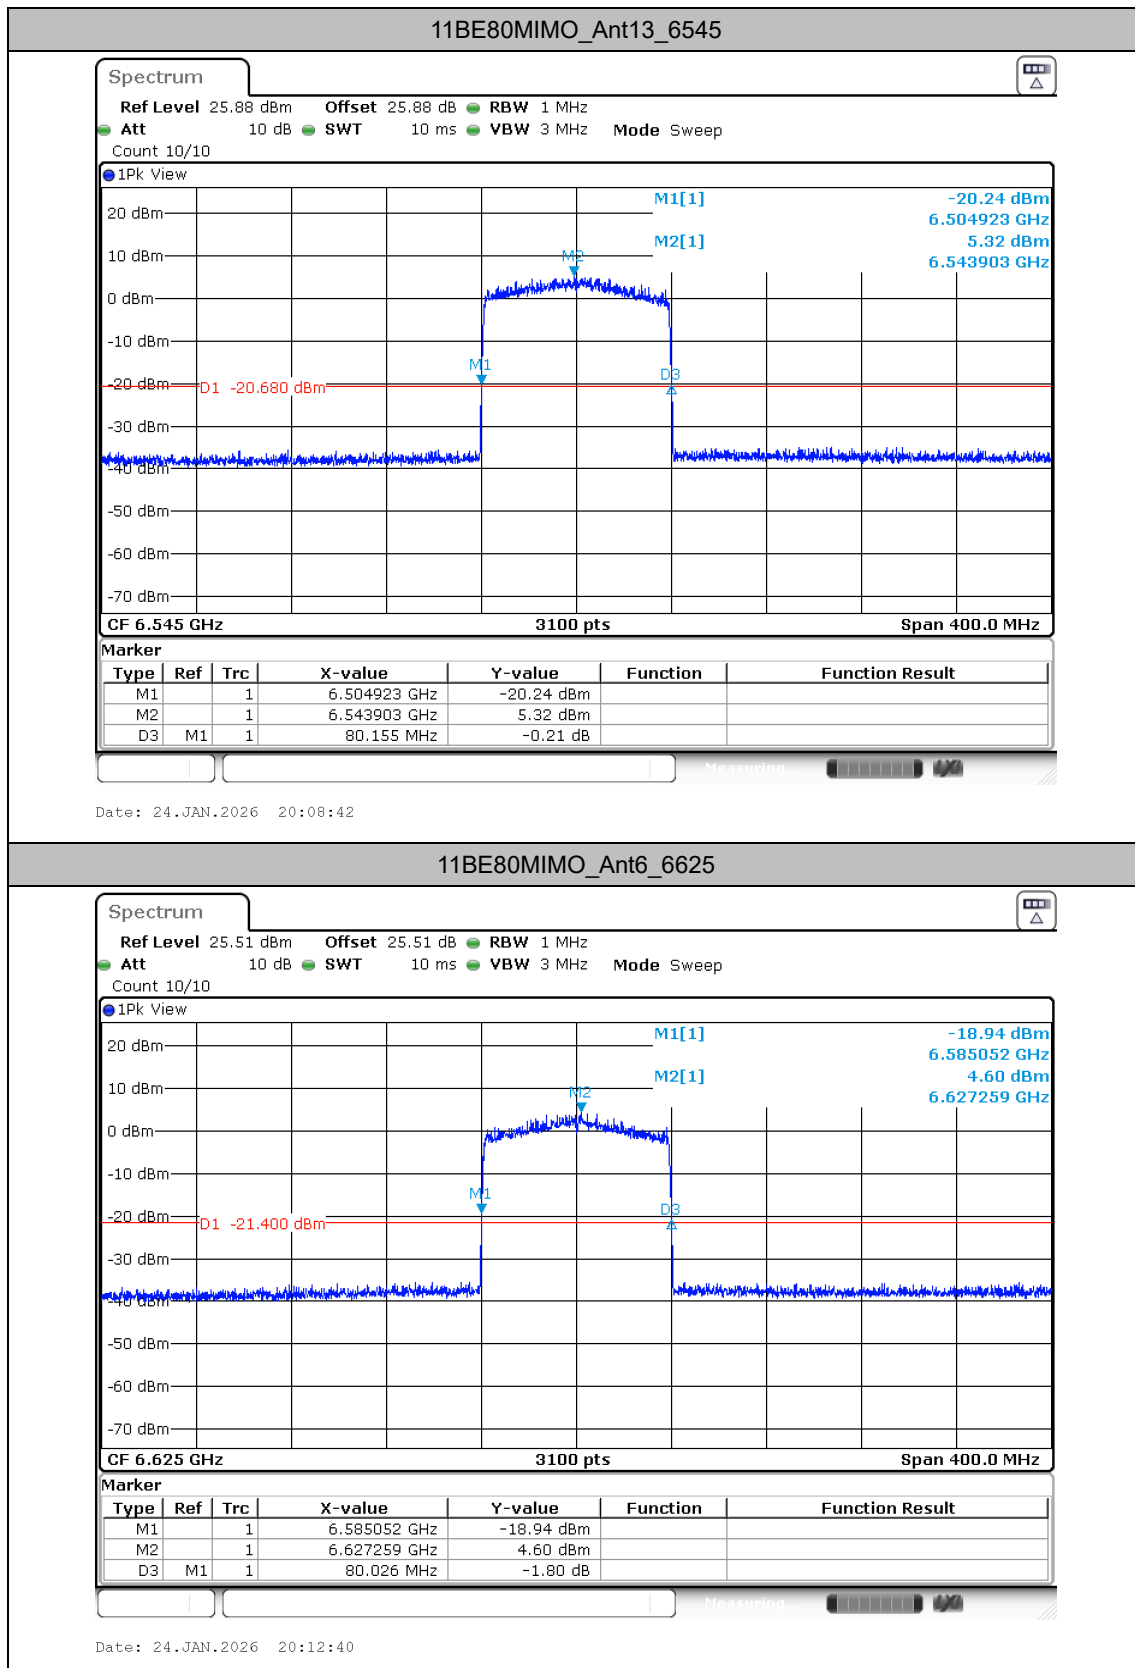


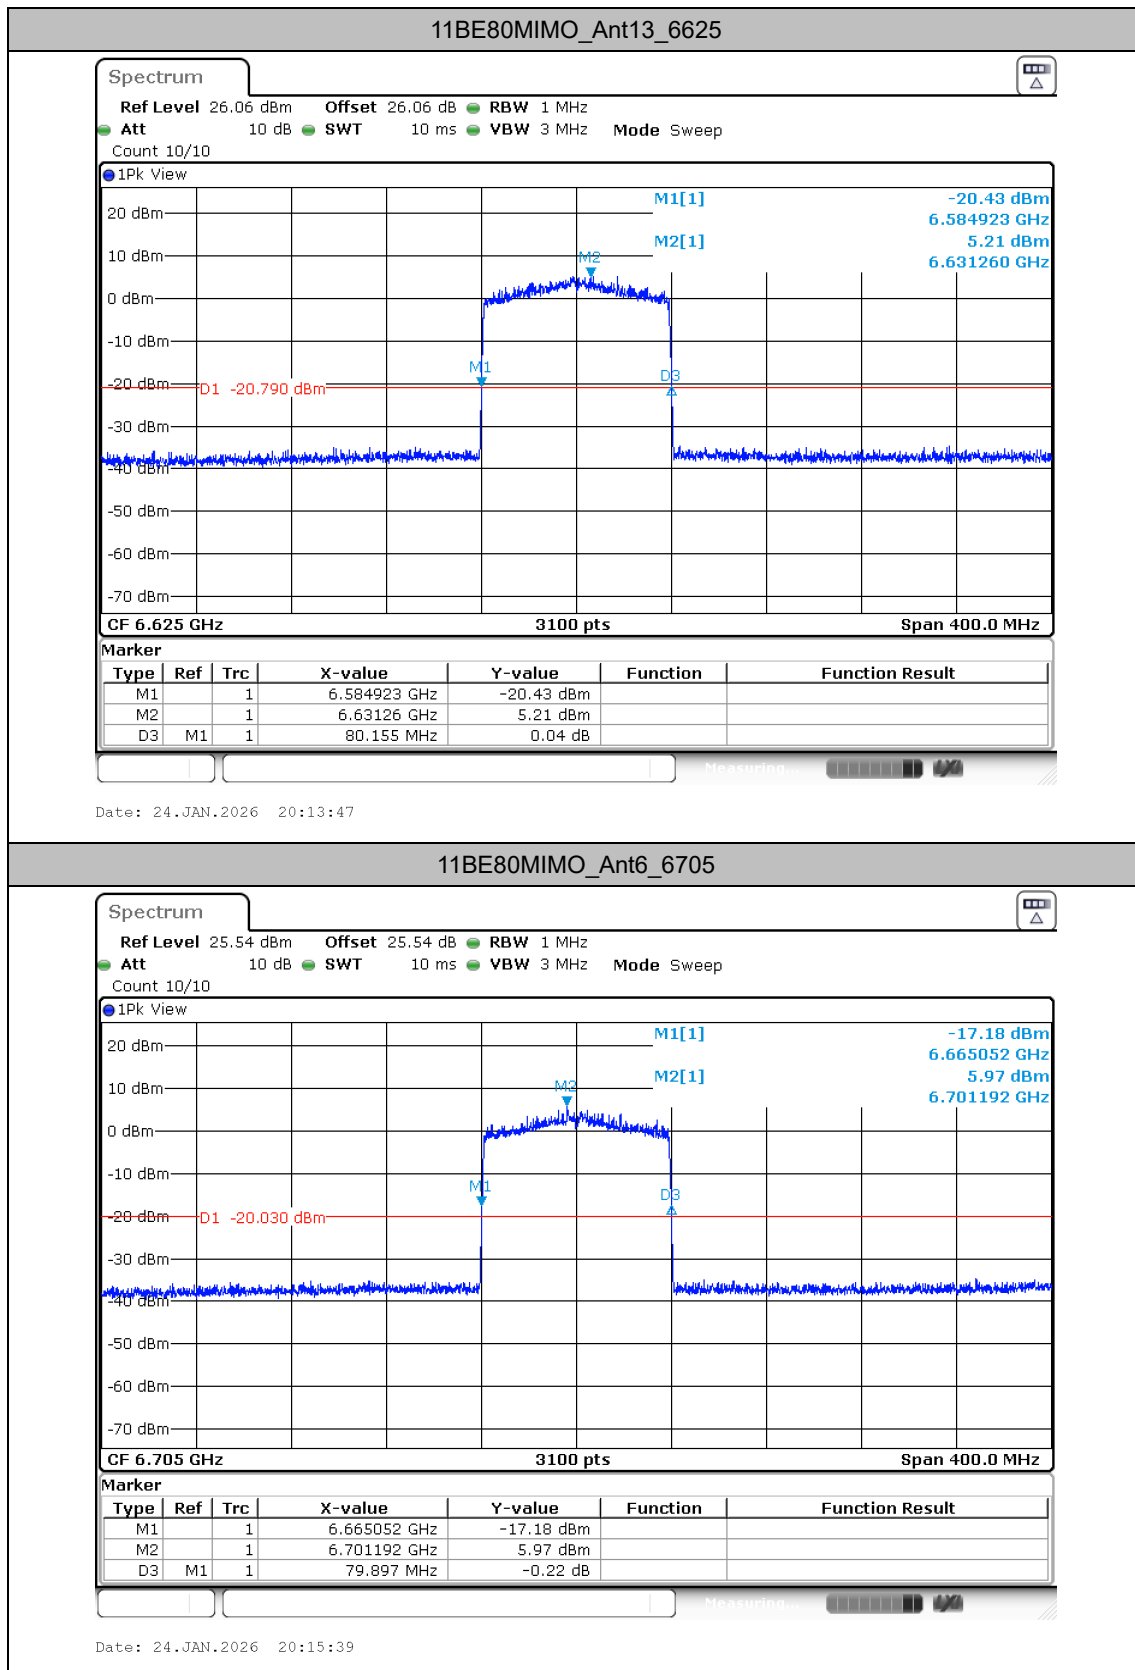


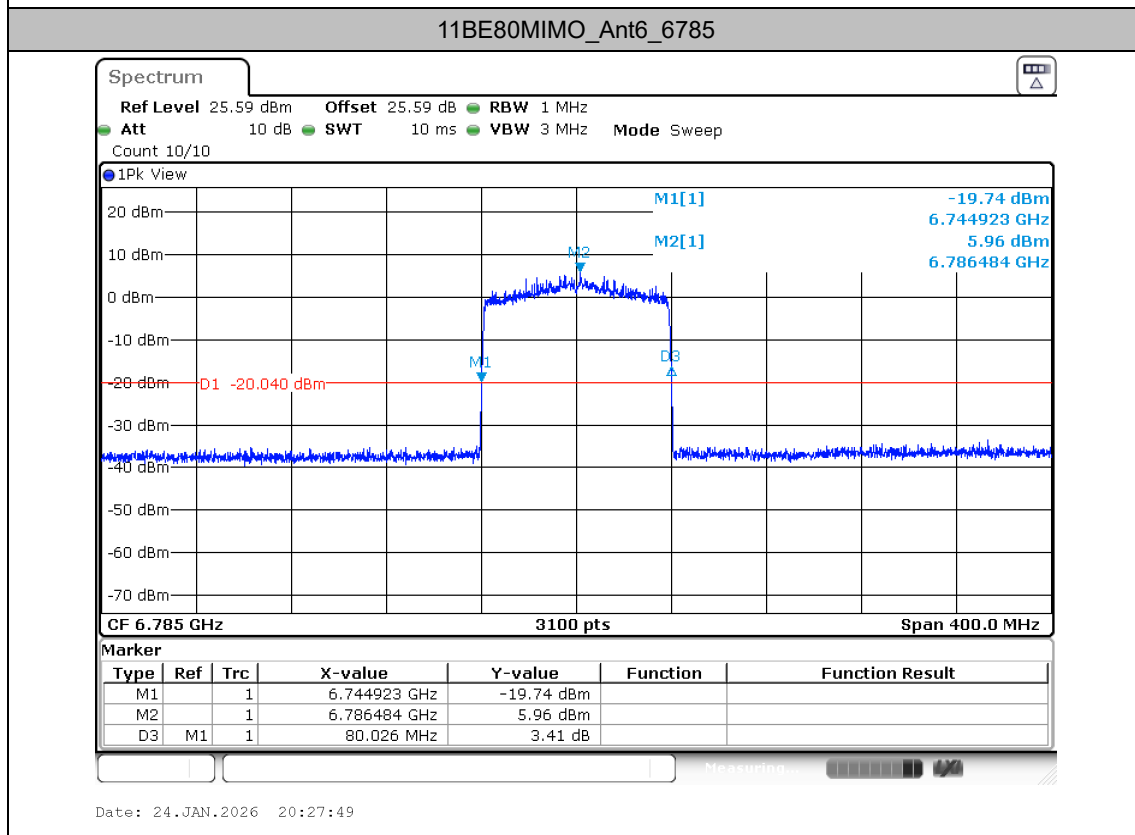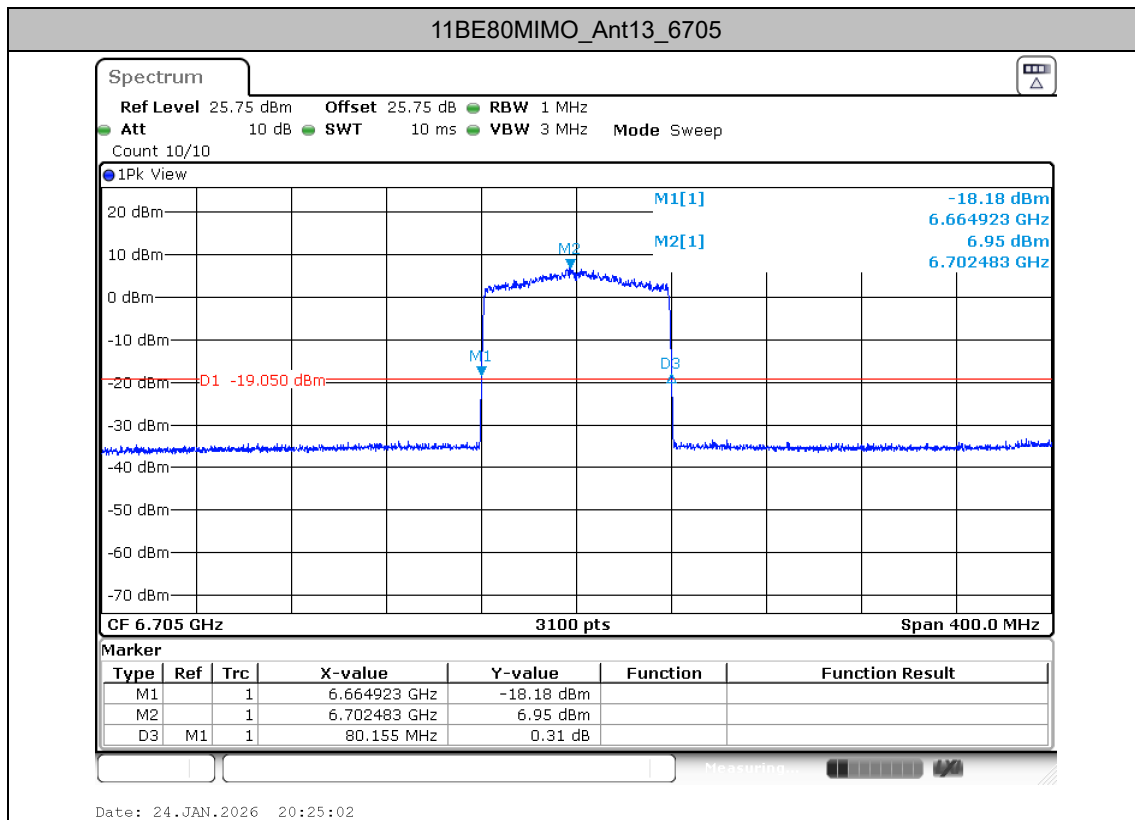


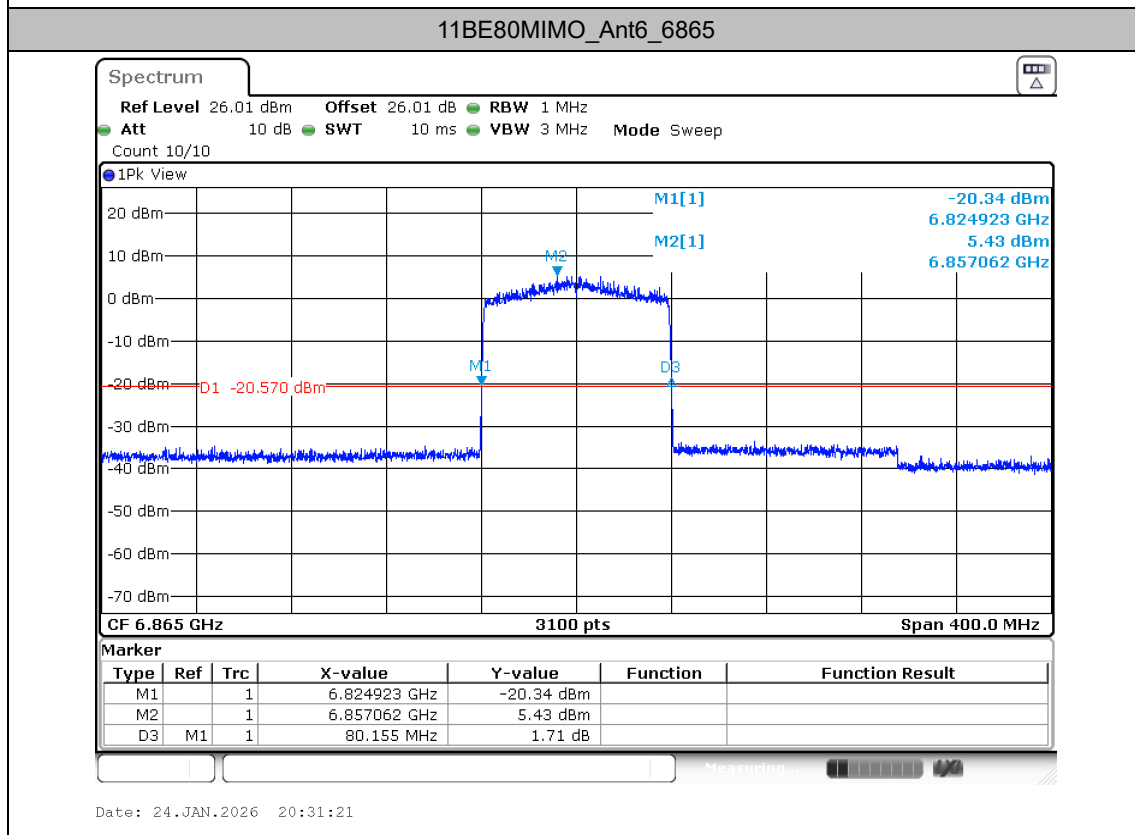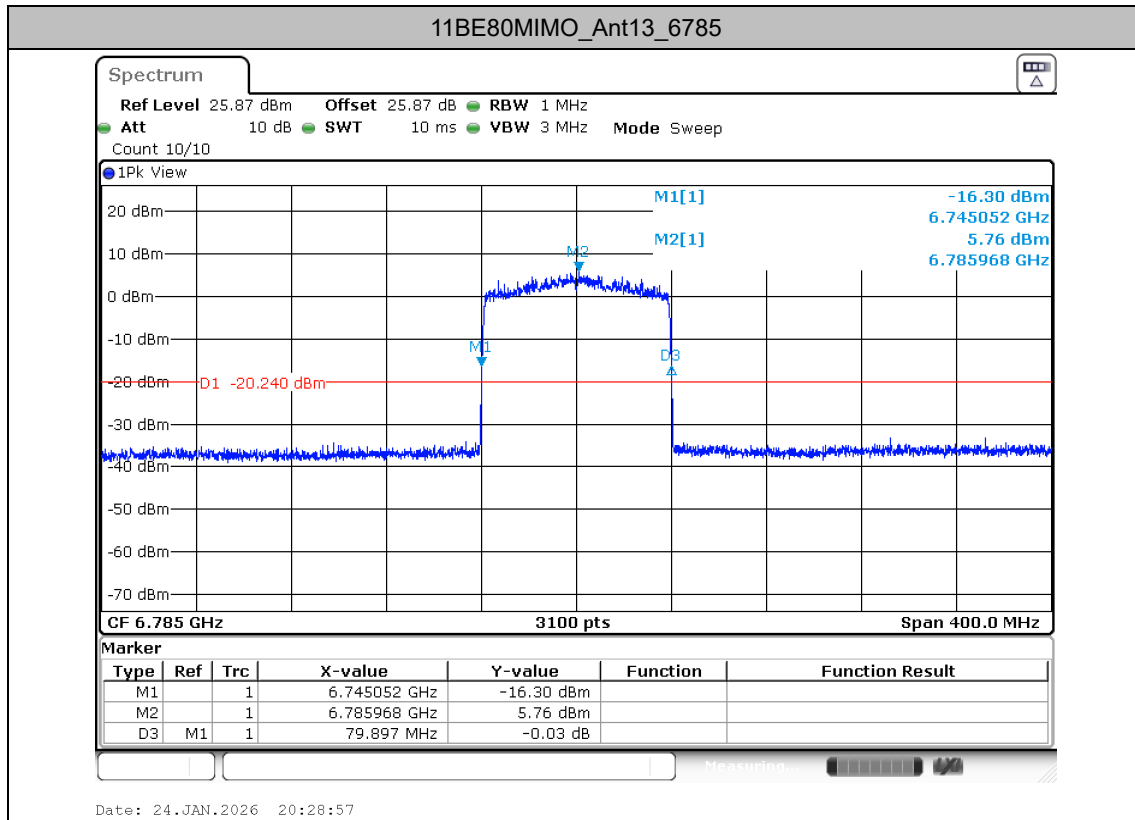


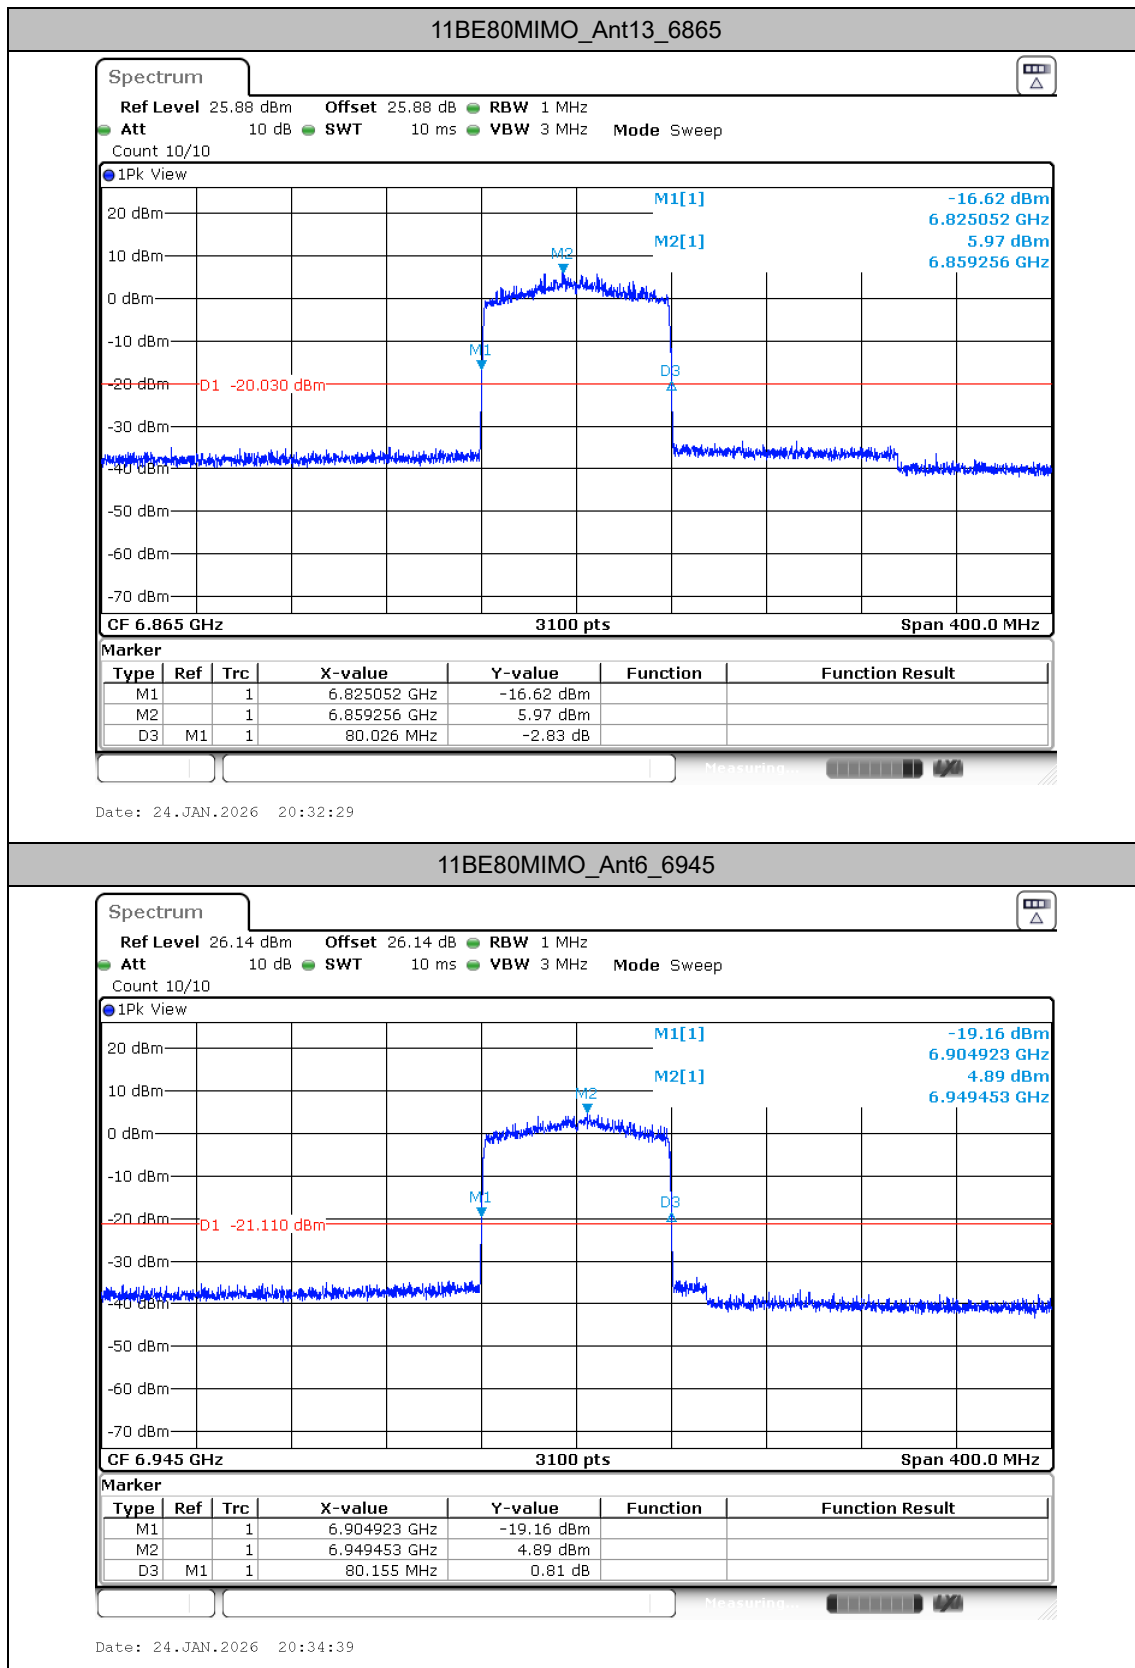


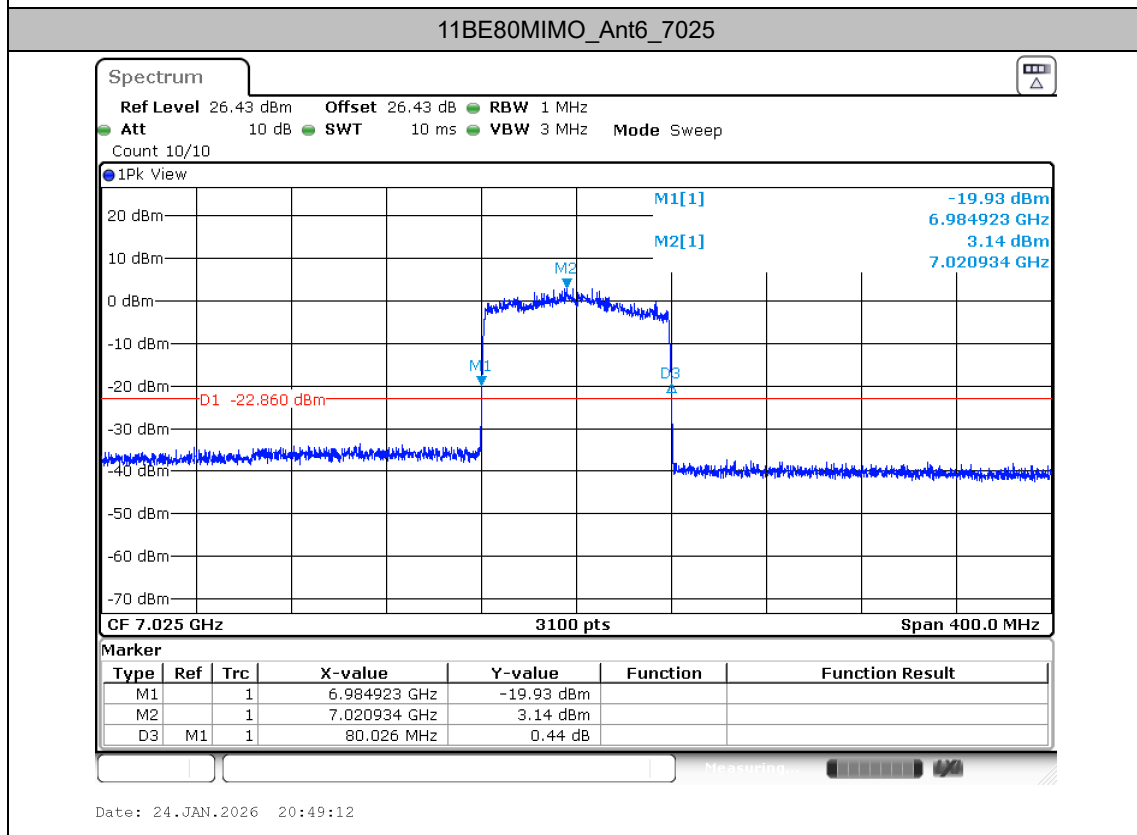
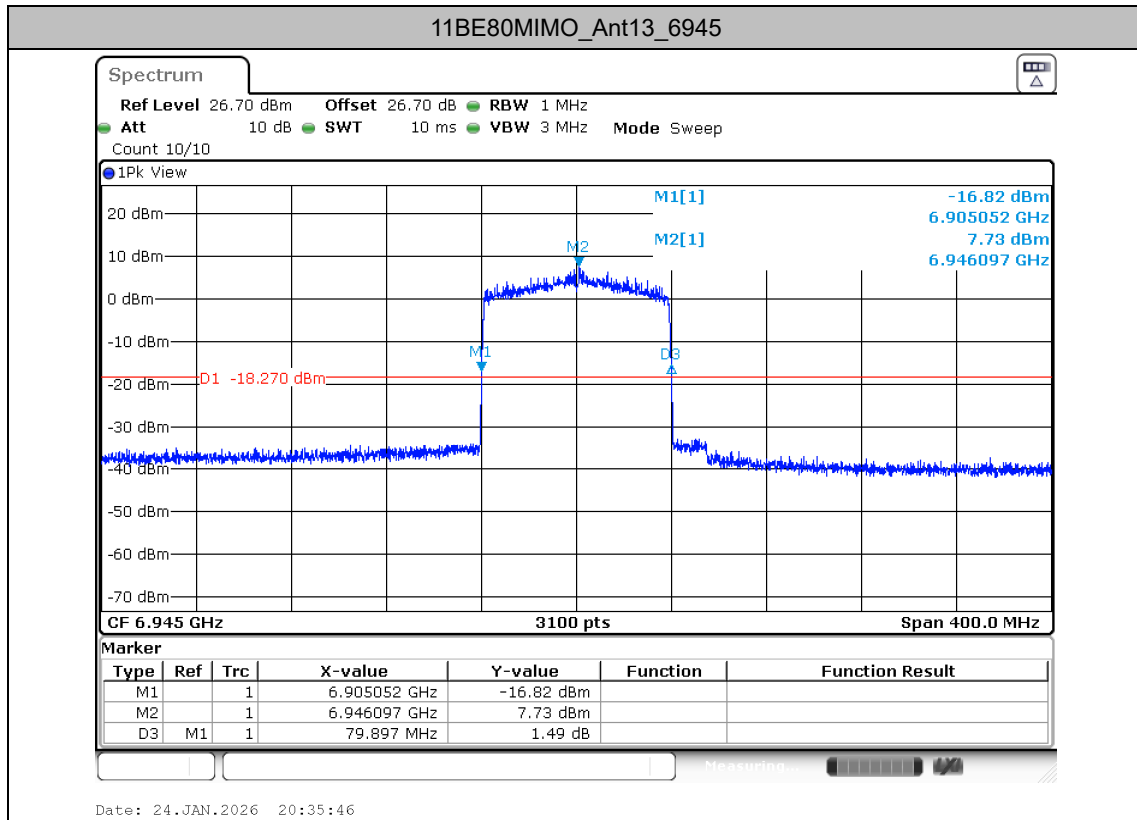


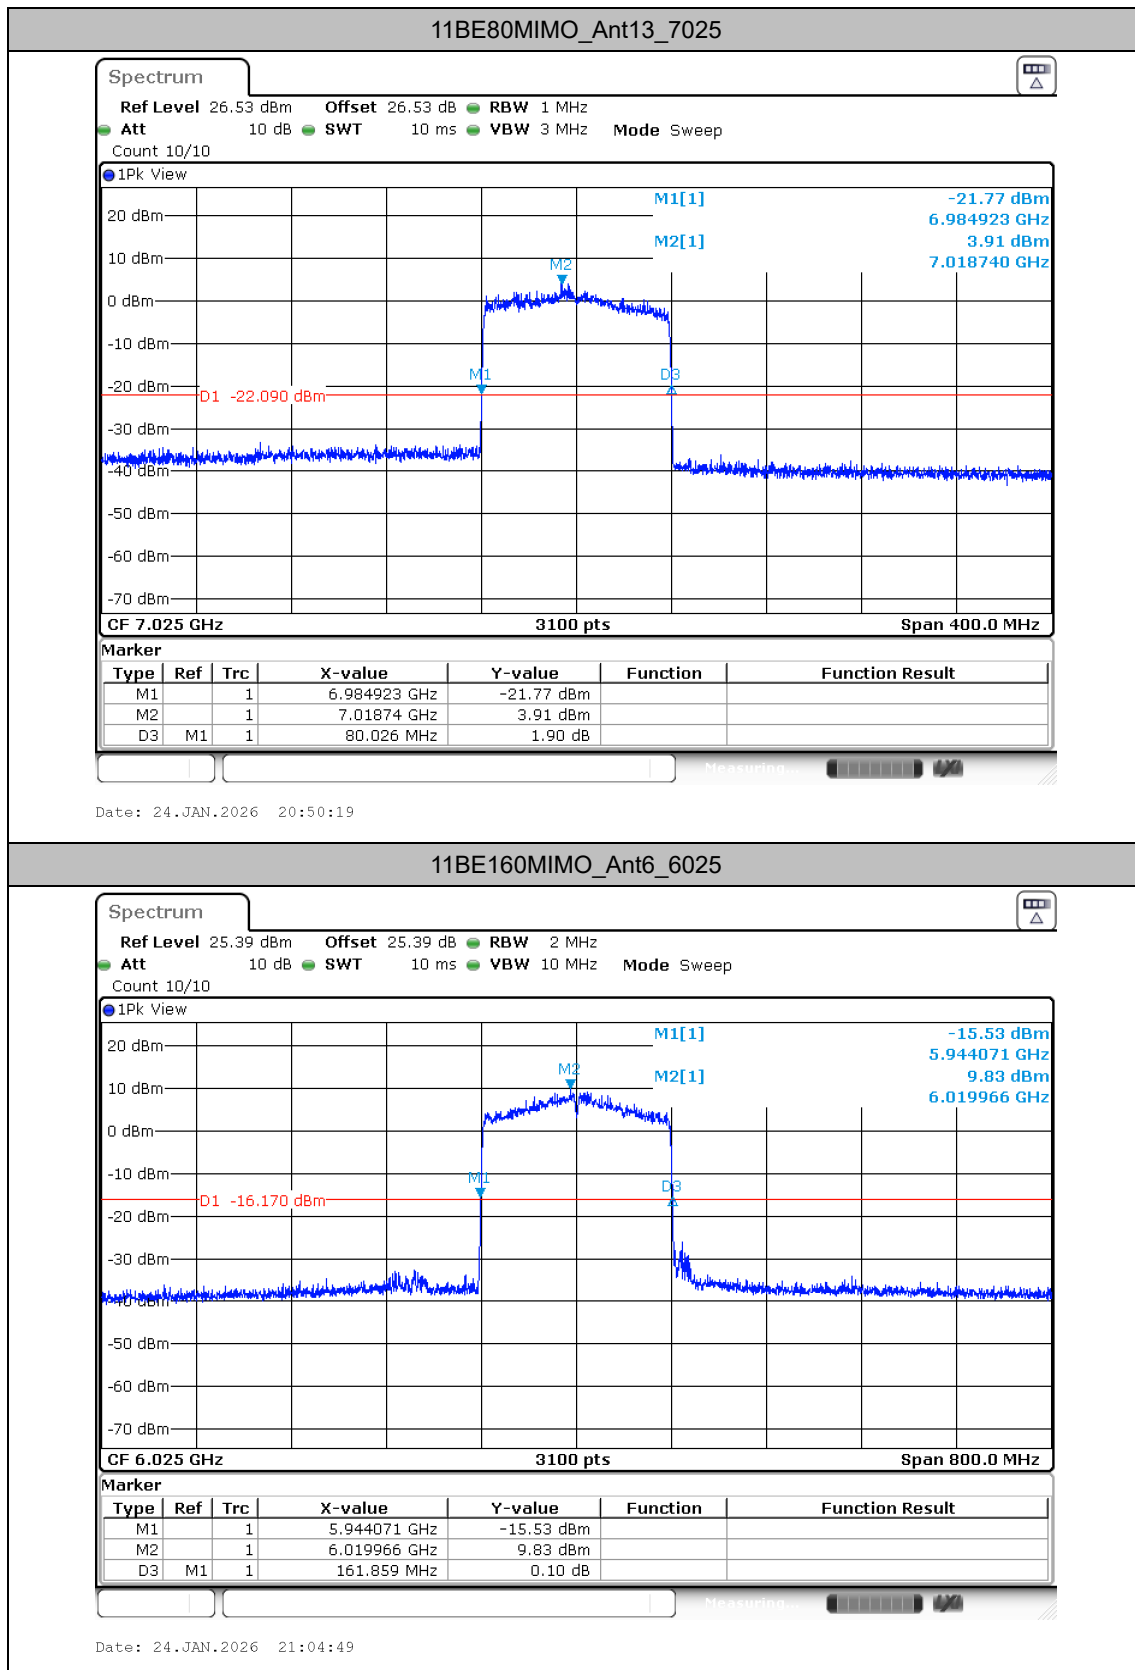


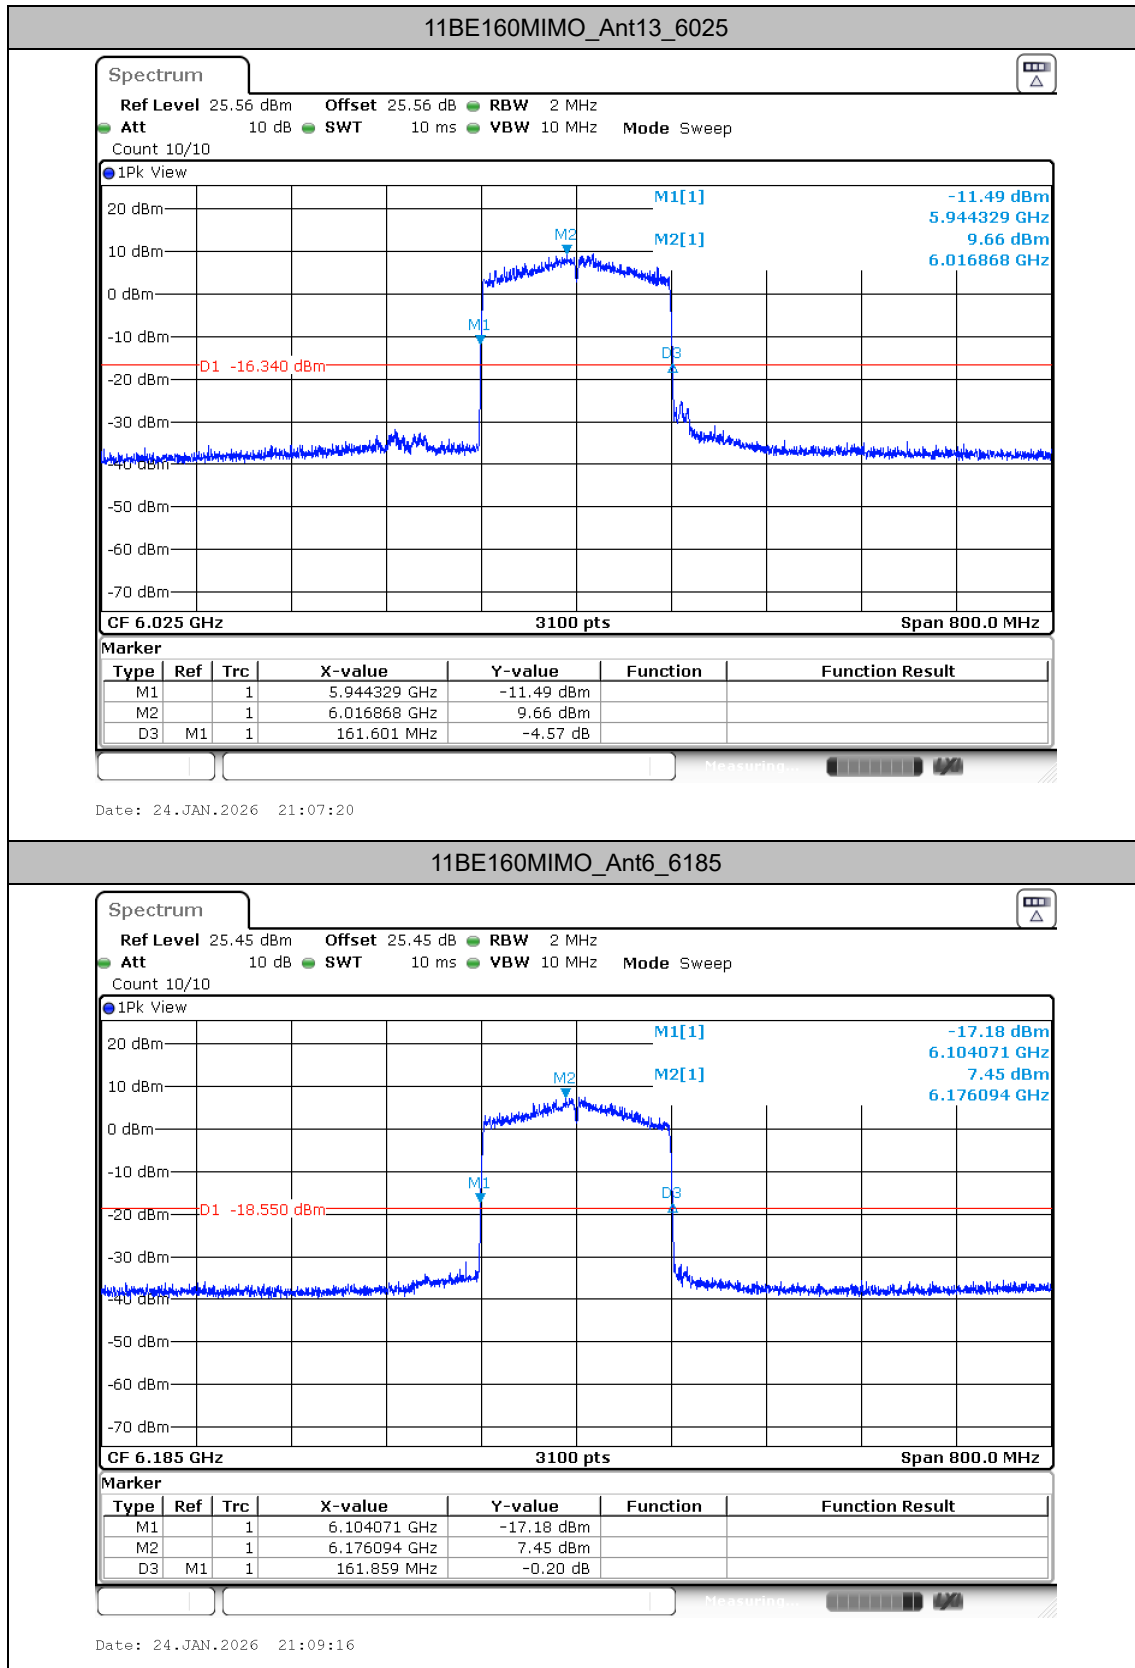


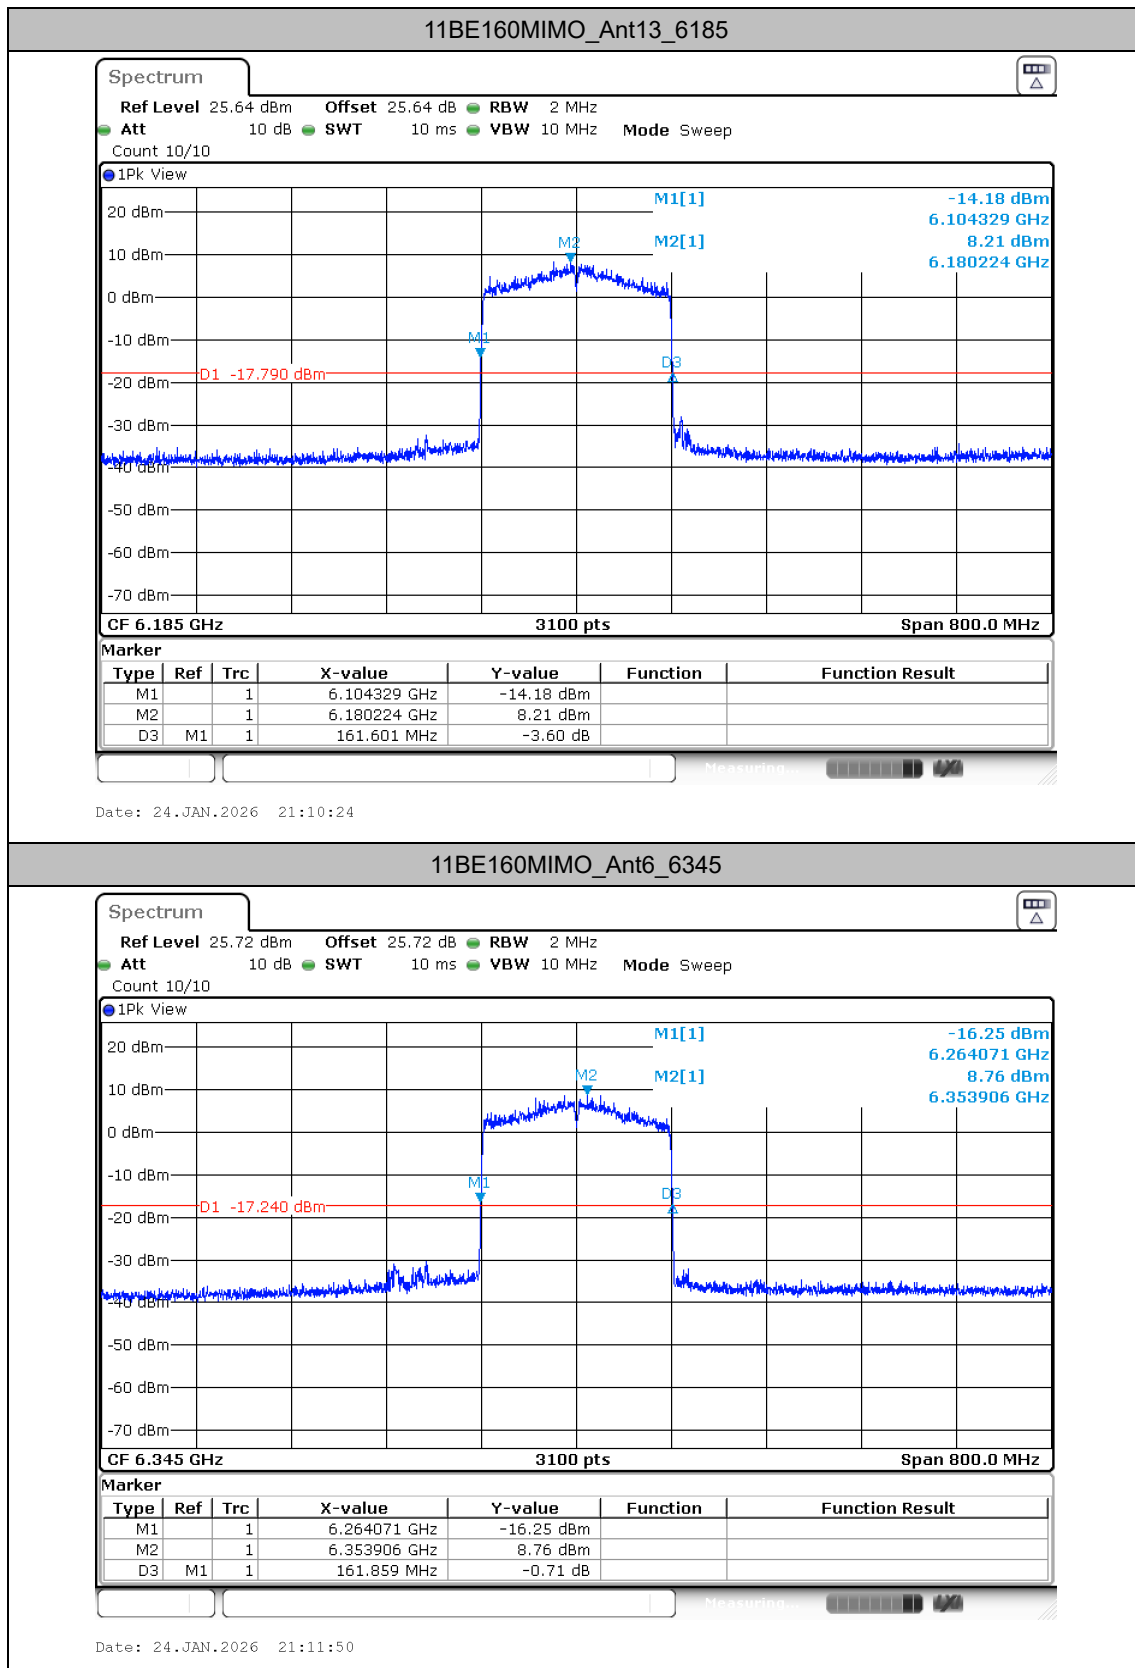


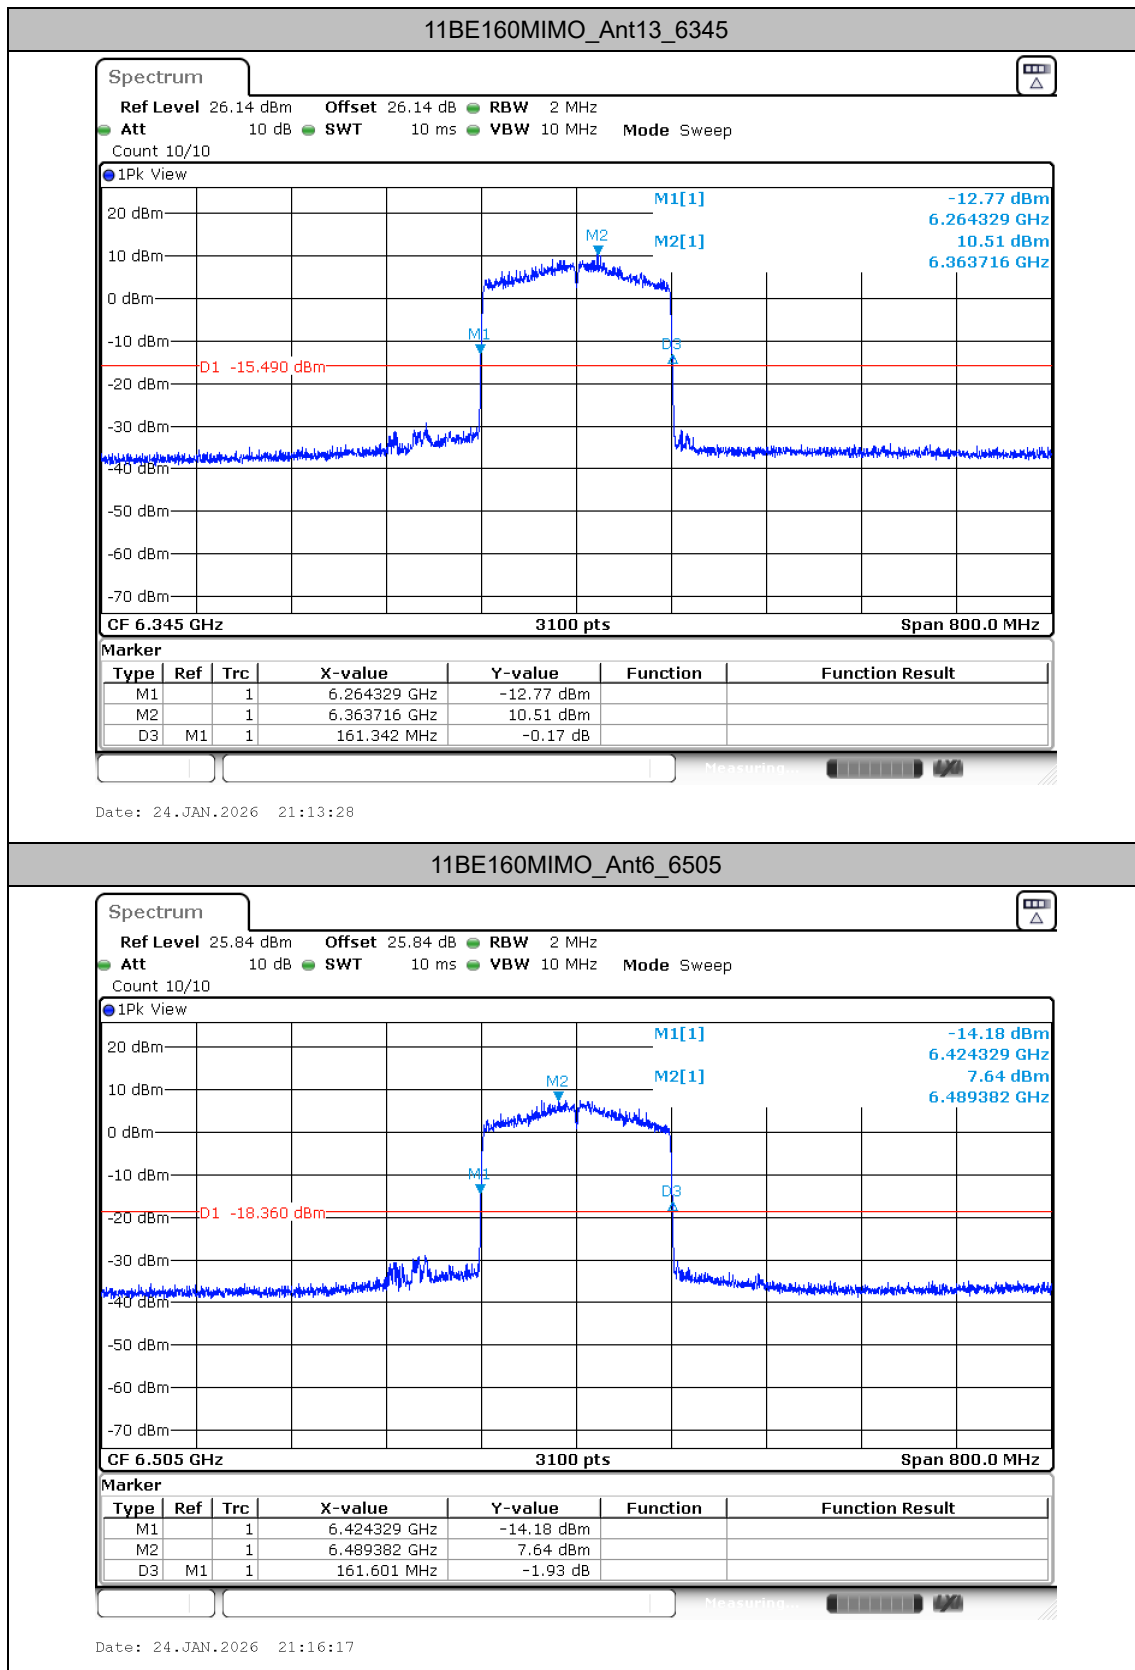

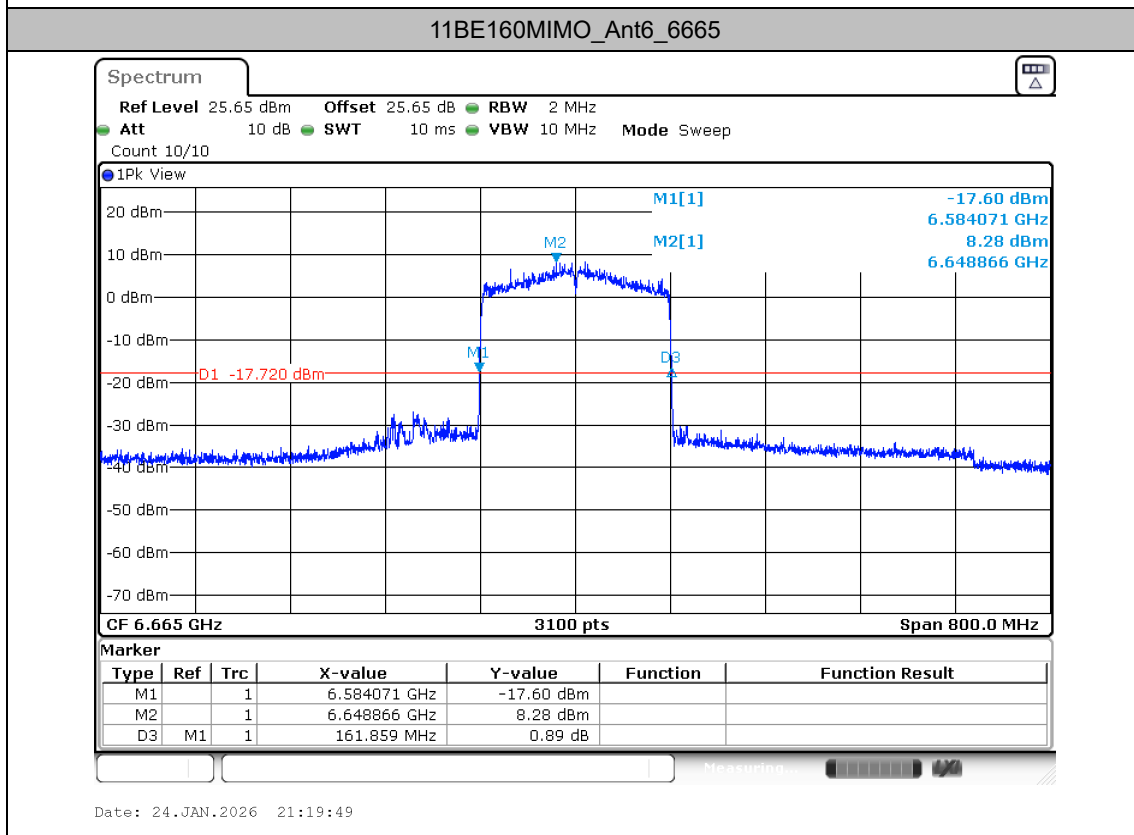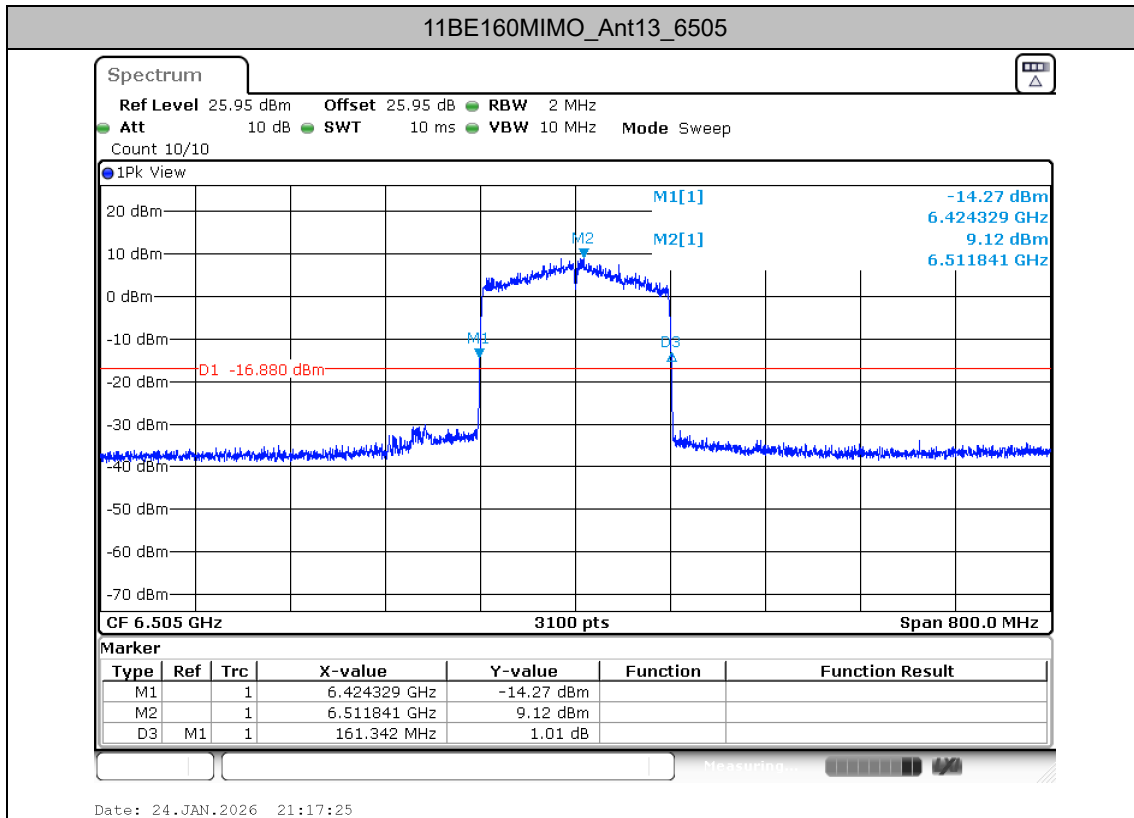

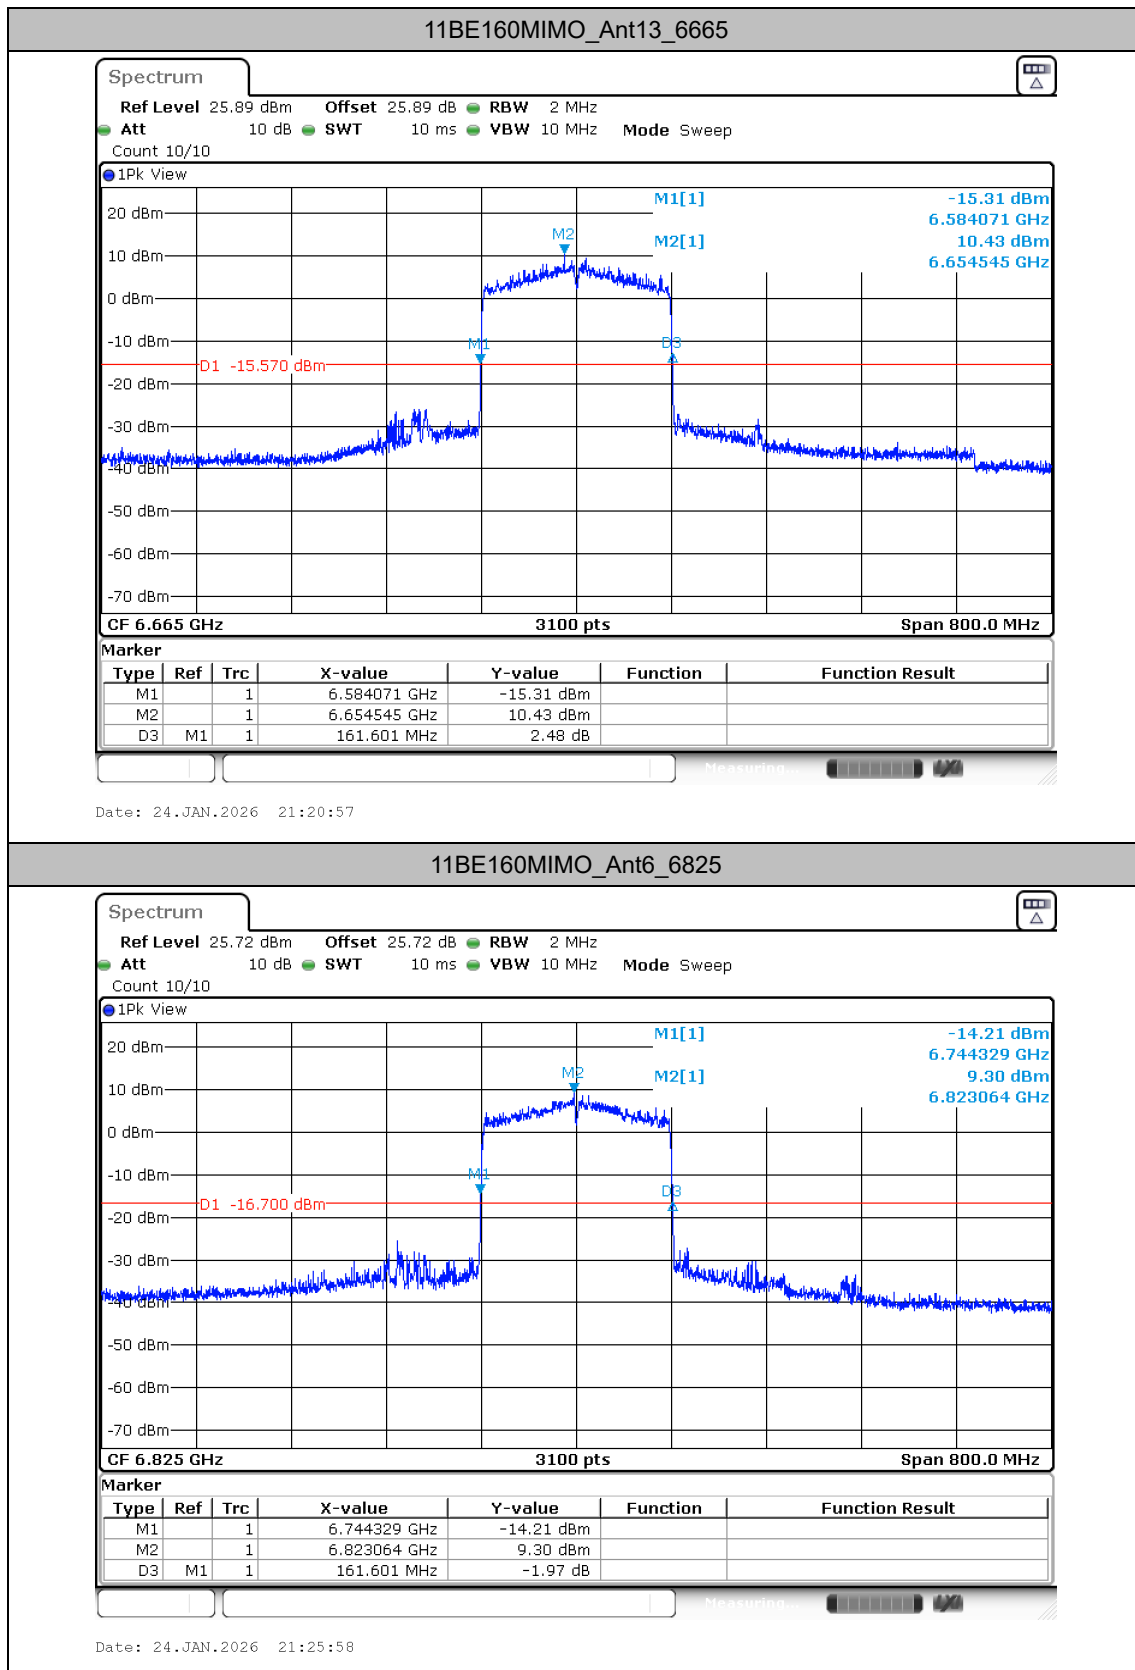

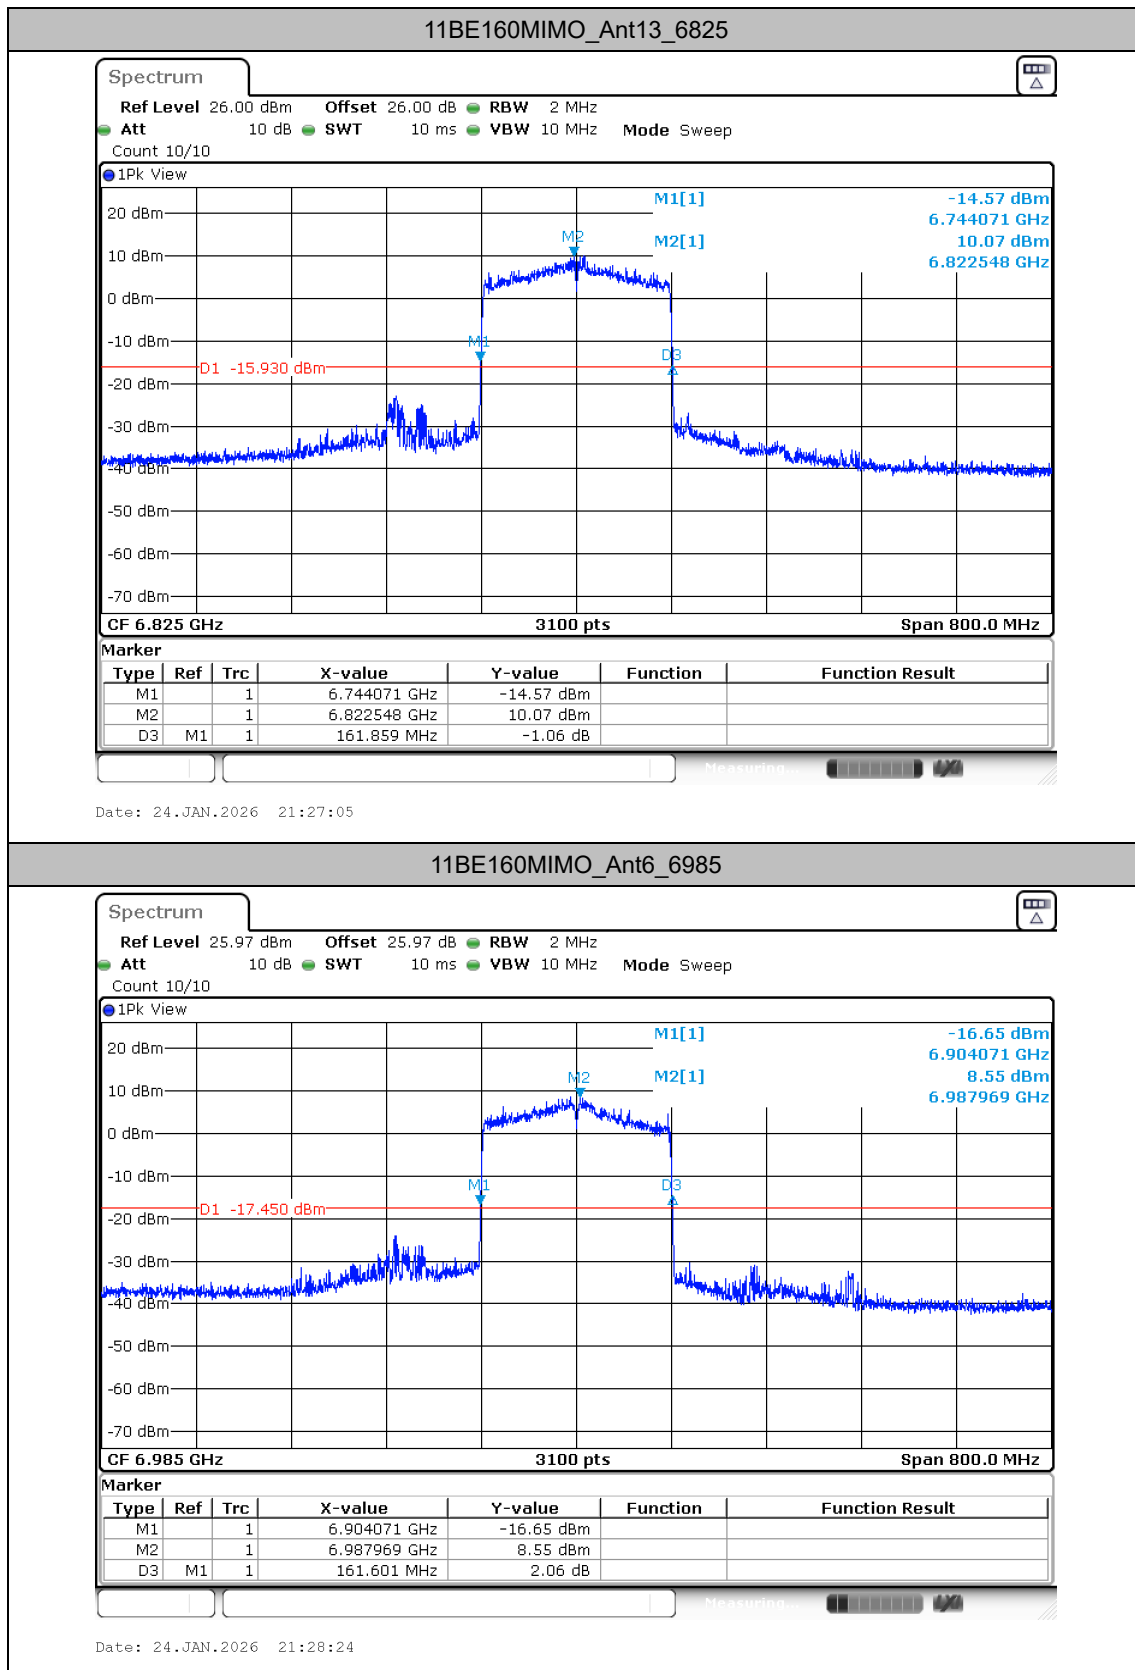

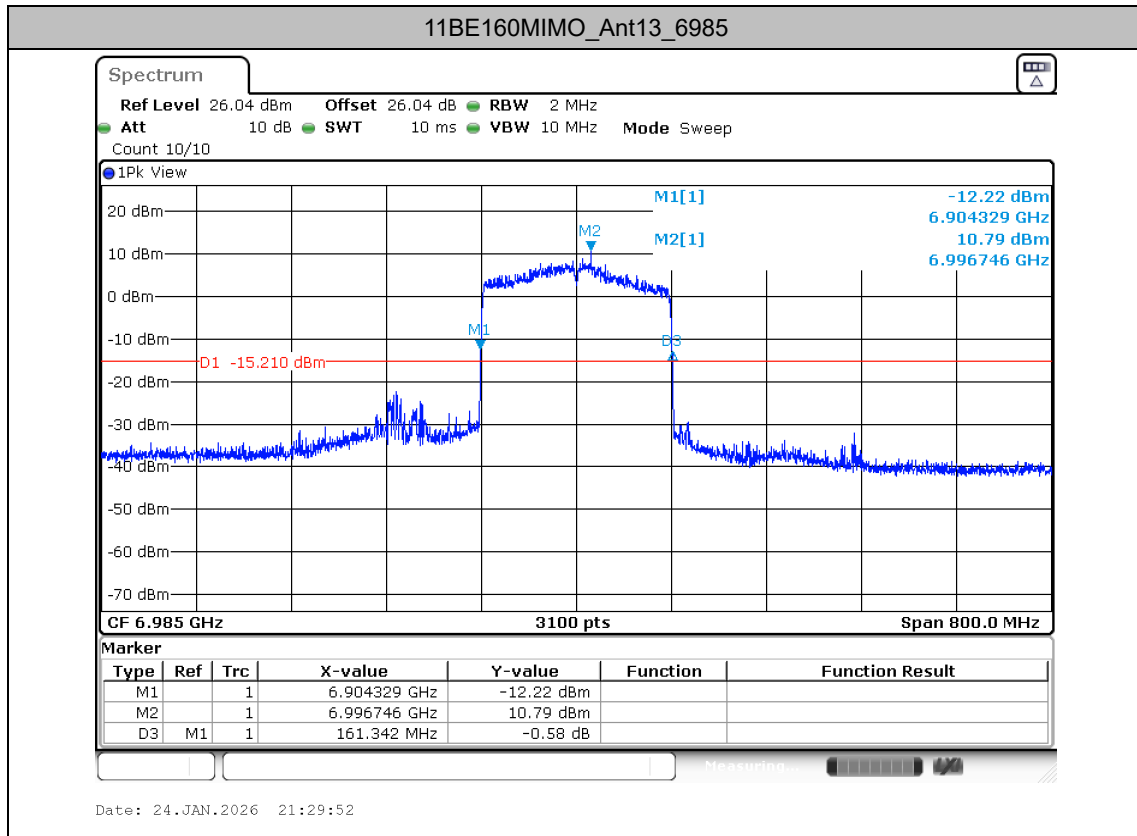



Occupied channel bandwidth

Test Result

TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11BE320MIMO	Ant6	6105	314.06	5947.8177	6261.8777	320	Pass
	Ant13	6105	313.451	5948.1223	6261.5731	320	Pass
	Ant6	6265	314.060	6107.8177	6421.8777	320	Pass
	Ant13	6265	313.755	6108.1223	6421.8777	320	Pass
	Ant6	6425	314.060	6267.8177	6581.8777	320	Pass
	Ant13	6425	313.451	6268.4269	6581.8777	320	Pass
	Ant6	6585	314.365	6427.8177	6742.1823	320	Pass
	Ant13	6585	314.060	6428.4269	6742.4869	320	Pass
	Ant6	6745	314.060	6588.4269	6902.4869	320	Pass
	Ant13	6745	313.755	6588.4269	6902.1823	320	Pass
	Ant6	6905	312.842	6748.4269	7061.2684	320	Pass
	Ant13	6905	313.146	6748.1223	7061.2684	320	Pass
11BE20MIMO	Ant6	5955	18.829	5945.5759	5964.4050	---	---
	Ant13	5955	18.791	5945.5950	5964.3860	---	---
	Ant6	6195	18.848	6185.5569	6204.4050	---	---
	Ant13	6195	18.829	6185.5759	6204.4050	---	---
	Ant6	6415	18.848	6405.5569	6424.4050	---	---
	Ant13	6415	18.791	6405.5759	6424.3670	---	---
	Ant6	6435	18.829	6425.5759	6444.4050	---	---
	Ant13	6435	18.810	6425.5759	6444.3860	---	---
	Ant6	6475	18.810	6465.5759	6484.3860	---	---
	Ant13	6475	18.829	6465.5759	6484.4050	---	---
	Ant6	6515	18.829	6505.5759	6524.4050	---	---
	Ant13	6515	18.791	6505.5950	6524.3860	---	---
	Ant6	6535	18.848	6525.5569	6544.4050	---	---
	Ant13	6535	18.829	6525.5759	6544.4050	---	---
	Ant6	6695	18.867	6685.5569	6704.4241	---	---
	Ant13	6695	18.829	6685.5759	6704.4050	---	---
	Ant6	6855	18.848	6845.5759	6864.4241	---	---
	Ant13	6855	18.810	6845.5759	6864.3860	---	---
	Ant6	6875	18.829	6865.5759	6884.4050	---	---
	Ant13	6875	18.848	6865.5569	6884.4050	---	---
	Ant6	6895	18.867	6885.5759	6904.4431	---	---
	Ant13	6895	18.829	6885.5759	6904.4050	---	---
	Ant6	6995	18.829	6985.5378	7004.3670	---	---
	Ant13	6995	18.772	6985.5759	7004.3479	---	---
	Ant6	7095	18.848	7085.5759	7104.4241	---	---
	Ant13	7095	18.867	7085.5569	7104.4241	---	---
11BE40MIMO	Ant6	5965	37.696	5946.1518	5983.8482	---	---
	Ant13	5965	37.620	5946.2280	5983.8482	---	---
	Ant6	6205	37.734	6186.1138	6223.8482	---	---
	Ant13	6205	37.734	6186.1138	6223.8482	---	---
	Ant6	6405	37.658	6386.1518	6423.8101	---	---
	Ant13	6405	37.696	6386.1518	6423.8482	---	---



	Ant6	6445	37.696	6426.1518	6463.8482	---	---
	Ant13	6445	37.734	6426.1138	6463.8482	---	---
	Ant6	6485	37.734	6466.1138	6503.8482	---	---
	Ant13	6485	37.658	6466.1899	6503.8482	---	---
	Ant6	6525	37.772	6506.0757	6543.8482	---	---
	Ant13	6525	37.658	6506.1518	6543.8101	---	---
	Ant6	6565	37.772	6546.1138	6583.8862	---	---
	Ant13	6565	37.620	6546.1899	6583.8101	---	---
	Ant6	6685	37.811	6666.0757	6703.8862	---	---
	Ant13	6685	37.658	6666.1518	6703.8101	---	---
	Ant6	6845	37.887	6826.0376	6863.9243	---	---
	Ant13	6845	37.696	6826.1518	6863.8482	---	---
	Ant6	6885	37.887	6866.0376	6903.9243	---	---
	Ant13	6885	37.772	6866.1518	6903.9243	---	---
	Ant6	6925	37.811	6906.0757	6943.8862	---	---
	Ant13	6925	37.849	6906.0757	6943.9243	---	---
	Ant6	7005	37.772	6985.9995	7023.7720	---	---
	Ant13	7005	37.734	6986.0376	7023.7720	---	---
	Ant6	7085	37.849	7065.9995	7103.8482	---	---
	Ant13	7085	37.811	7066.0757	7103.8862	---	---
11BE80MIMO	Ant6	5985	76.992	5946.5421	6023.5340	---	---
	Ant13	5985	76.916	5946.6183	6023.5340	---	---
	Ant6	6225	77.144	6186.3898	6263.5340	---	---
	Ant13	6225	77.068	6186.3137	6263.3817	---	---
	Ant6	6385	77.144	6346.3898	6423.5340	---	---
	Ant13	6385	76.992	6346.4660	6423.4579	---	---
	Ant6	6465	77.068	6426.4660	6503.5340	---	---
	Ant13	6465	76.992	6426.4660	6503.4579	---	---
	Ant6	6545	77.144	6506.3898	6583.5340	---	---
	Ant13	6545	76.916	6506.5421	6583.4579	---	---
	Ant6	6625	77.068	6586.4660	6663.5340	---	---
	Ant13	6625	77.144	6586.3898	6663.5340	---	---
	Ant6	6705	77.144	6666.4660	6743.6102	---	---
	Ant13	6705	77.068	6666.5421	6743.6102	---	---
	Ant6	6785	77.144	6746.4660	6823.6102	---	---
	Ant13	6785	77.22	6746.4660	6823.6863	---	---
	Ant6	6865	77.068	6826.4660	6903.5340	---	---
	Ant13	6865	77.068	6826.3898	6903.4579	---	---
	Ant6	6945	77.144	6906.3898	6983.5340	---	---
	Ant13	6945	77.068	6906.4660	6983.5340	---	---
11BE160MIMO	Ant6	7025	77.22	6986.2375	7063.4579	---	---
	Ant13	7025	77.144	6986.3137	7063.4579	---	---
	Ant6	6025	156.268	5946.8658	6103.1342	---	---
	Ant13	6025	155.659	5947.1704	6102.8296	---	---
	Ant6	6185	156.116	6106.7135	6262.8296	---	---
	Ant13	6185	155.964	6106.8658	6262.8296	---	---
	Ant6	6345	156.268	6266.7135	6422.9819	---	---
	Ant13	6345	155.812	6267.0181	6422.8296	---	---
	Ant6	6505	156.421	6426.5612	6582.9819	---	---
	Ant13	6505	155.812	6427.0181	6582.8296	---	---



	Ant6	6665	156.268	6587.0181	6743.2865	---	---
	Ant13	6665	155.812	6587.1704	6742.9819	---	---
	Ant6	6825	156.268	6747.0181	6903.2865	---	---
	Ant13	6825	156.421	6746.7135	6903.1342	---	---
	Ant6	6985	156.268	6906.5612	7062.8296	---	---
	Ant13	6985	155.964	6906.5612	7062.5250	---	---

Note1: For channels with a nominal bandwidth of 320MHz, compliance is demonstrated by way of the 99%BW.

Note2: For channels with a nominal bandwidth less than 320MHz(e.g 20,40,80,160MHz), compliance is demonstrated by way of the 26dB EBW.



Test Graphs

