


26DB BANDWIDTH AND OCCUPIED BANDWIDTH

Test Result

Band	Channel	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit (MHz)	Verdict
GSM1900	512	0.24689	0.3089	---	PASS
GSM1900	661	0.24342	0.3169	---	PASS
GSM1900	810	0.24421	0.3119	---	PASS
EGPRS1900	512	0.25252	0.3122	---	PASS
EGPRS1900	661	0.25118	0.3202	---	PASS
EGPRS1900	810	0.25495	0.3177	---	PASS


Test Graphs

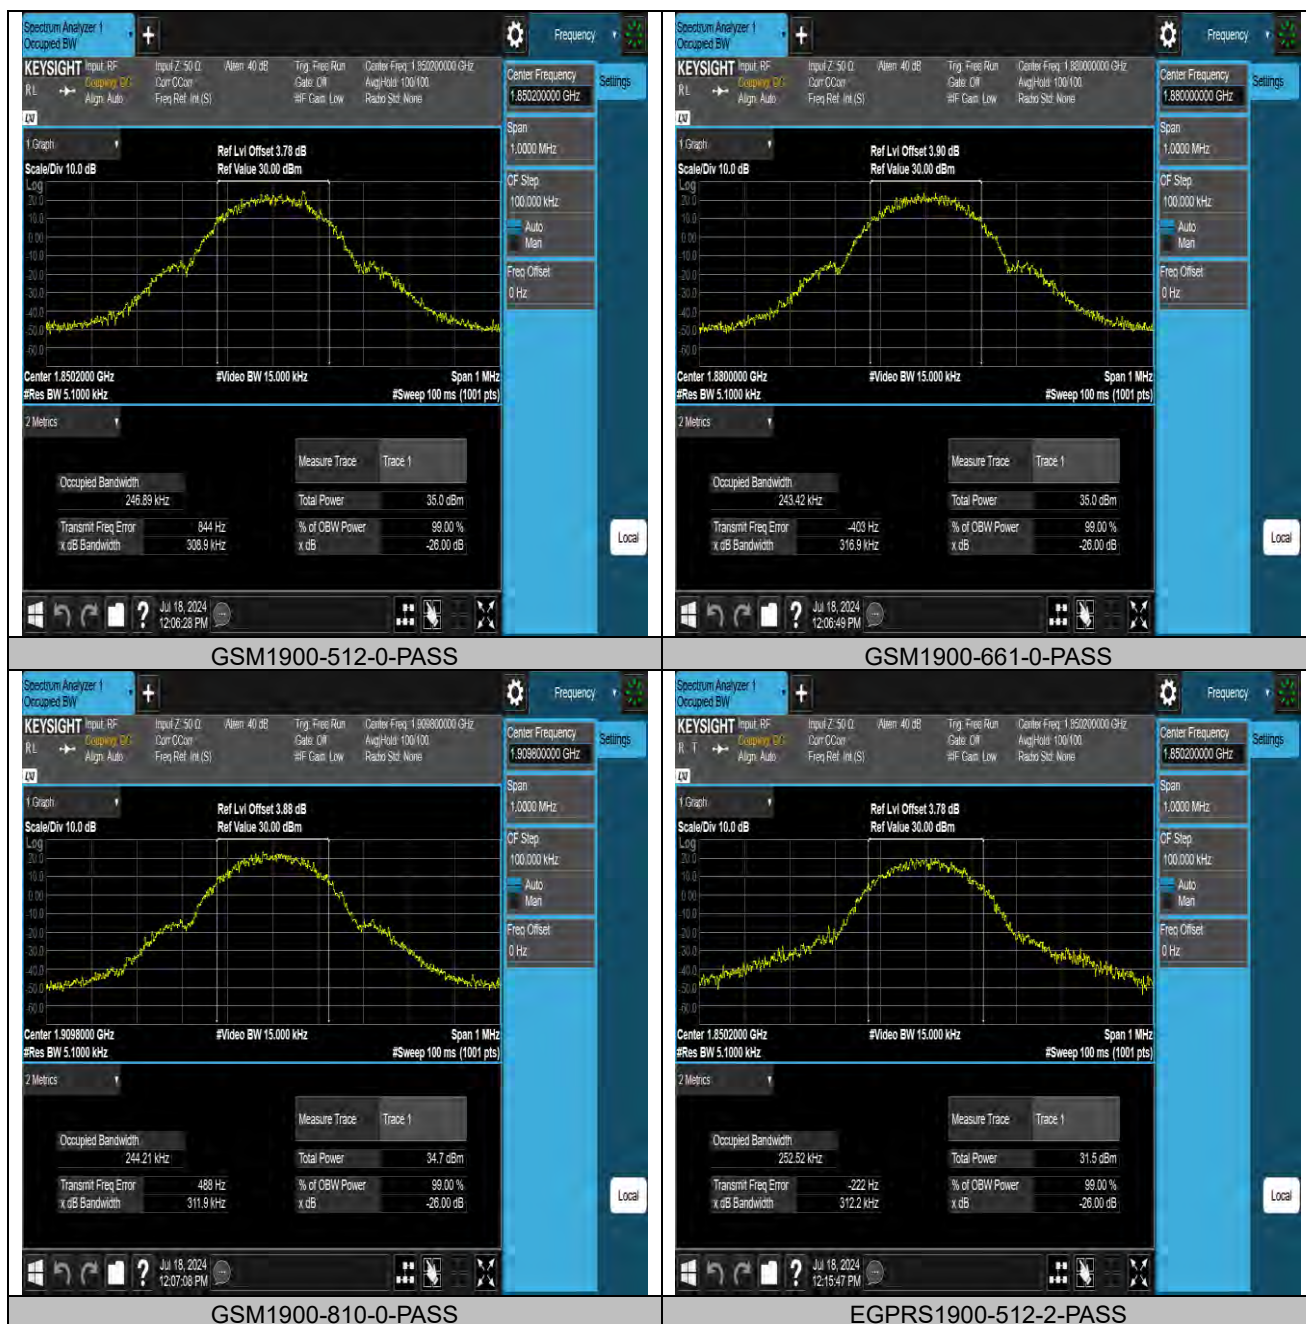



BUREAU
VERITAS

Test Report No.: W7L-240618W001RF06

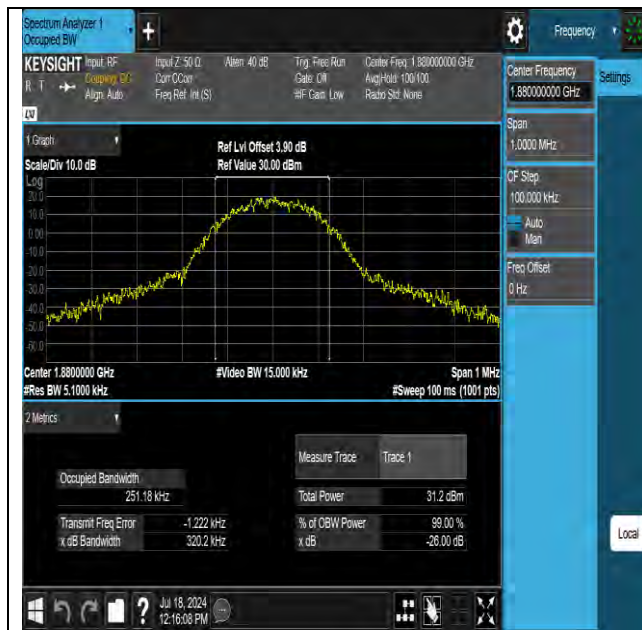

EGPRS1900-661-2-PASS



EGPRS1900-810-2-PASS

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com




Test Report No.: W7L-240618W001RF06

BAND EDGE

Test Result

Band	Channel	Freq (MHz)	Result (dBm)	Limit(dBm)	Verdict
GSM1900	512	1849.97	-28.32	-13	PASS
GSM1900	810	1910.02	-27.42	-13	PASS
EGPRS1900	512	1849.97	-36.19	-13	PASS
EGPRS1900	810	1910.00	-35.31	-13	PASS

Test Graphs

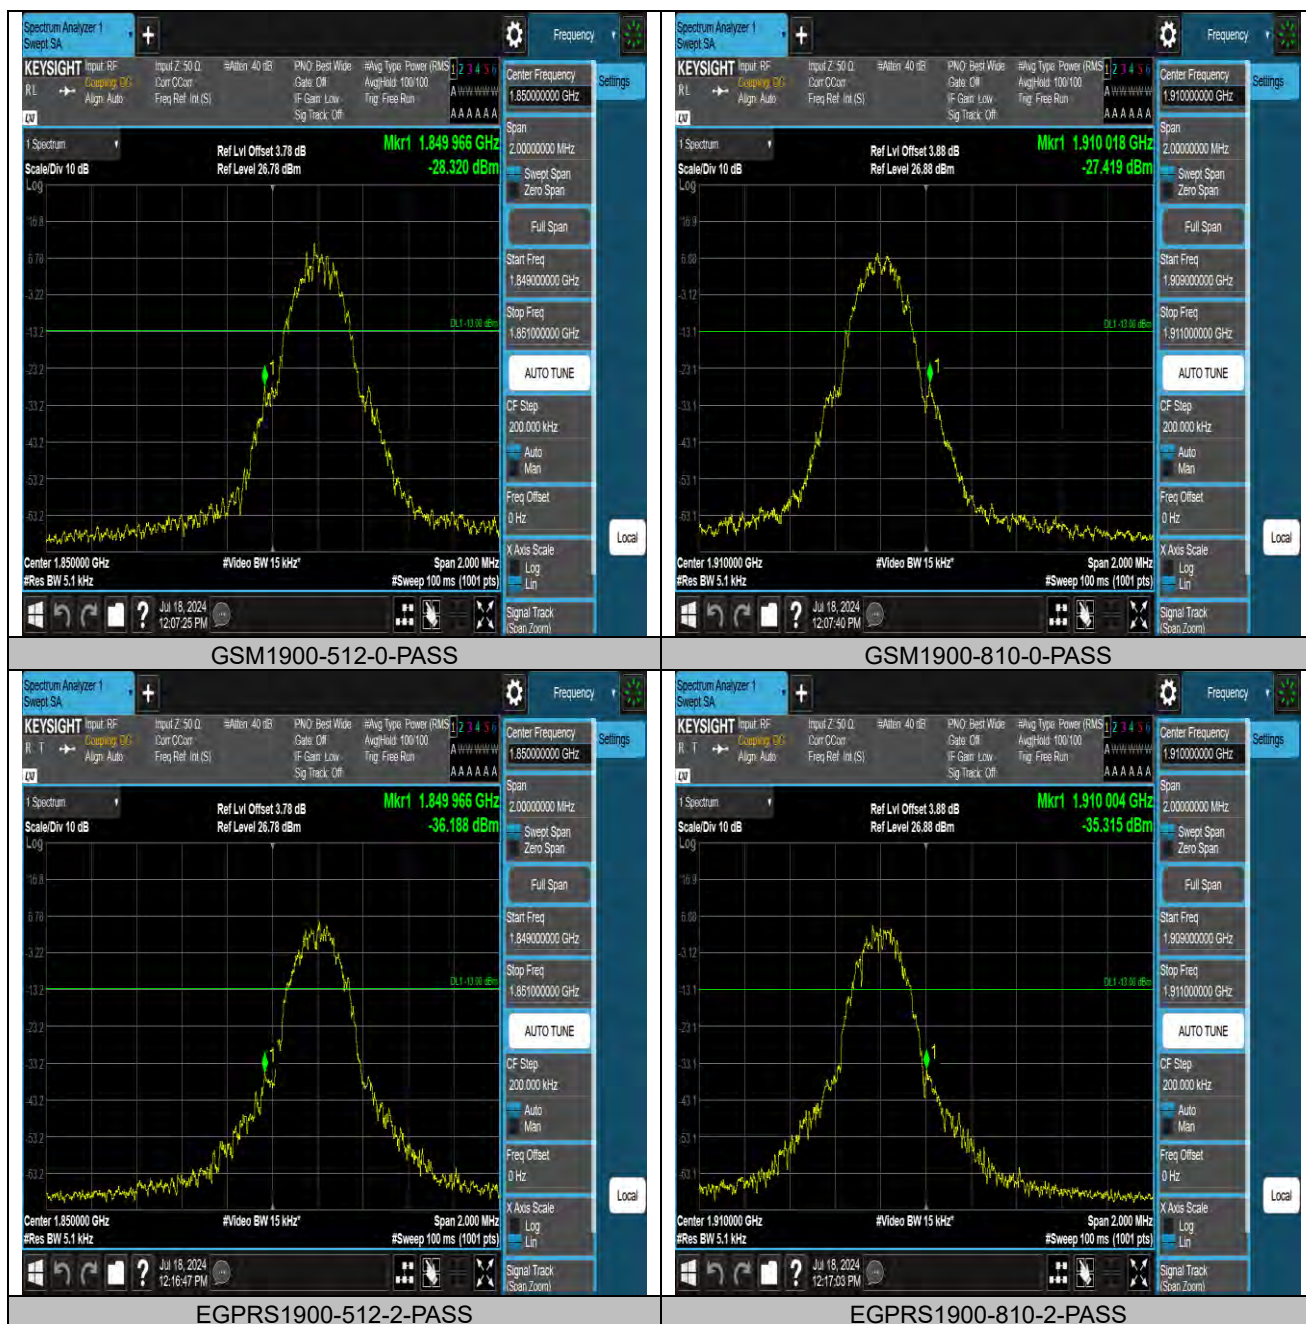

CONDUCTED SPURIOUS EMISSION

Test Result

Band	Channel	Frequency Range(MHz)	Max.Freq. (MHz)	Result (dBm)	Limit (dBm)	Verdict
GSM1900	512	30~1000MHz	892.82	-49.93	-13	PASS
GSM1900	512	1000~10000MHz	3801.25	-31.98	-13	PASS
GSM1900	512	10000~20000MHz	19376.5	-38.54	-13	PASS
GSM1900	661	30~1000MHz	892.23	-49.94	-13	PASS
GSM1900	661	1000~10000MHz	3854.8	-31.93	-13	PASS
GSM1900	661	10000~20000MHz	19429	-38.49	-13	PASS
GSM1900	810	30~1000MHz	890.29	-49.92	-13	PASS
GSM1900	810	1000~10000MHz	3841.3	-31.81	-13	PASS
GSM1900	810	10000~20000MHz	19357.5	-38.47	-13	PASS
EGPRS1900	512	30~1000MHz	889.52	-49.91	-13	PASS
EGPRS1900	512	1000~10000MHz	3808	-31.88	-13	PASS
EGPRS1900	512	10000~20000MHz	19265.5	-38.48	-13	PASS
EGPRS1900	661	30~1000MHz	891.17	-49.89	-13	PASS
EGPRS1900	661	1000~10000MHz	3797.2	-31.88	-13	PASS
EGPRS1900	661	10000~20000MHz	19405	-38.52	-13	PASS
EGPRS1900	810	30~1000MHz	850.52	-49.92	-13	PASS
EGPRS1900	810	1000~10000MHz	3849.4	-31.94	-13	PASS
EGPRS1900	810	10000~20000MHz	19319.5	-38.51	-13	PASS


Test Graphs





BUREAU
VERITAS

Test Report No.: W7L-240618W001RF06

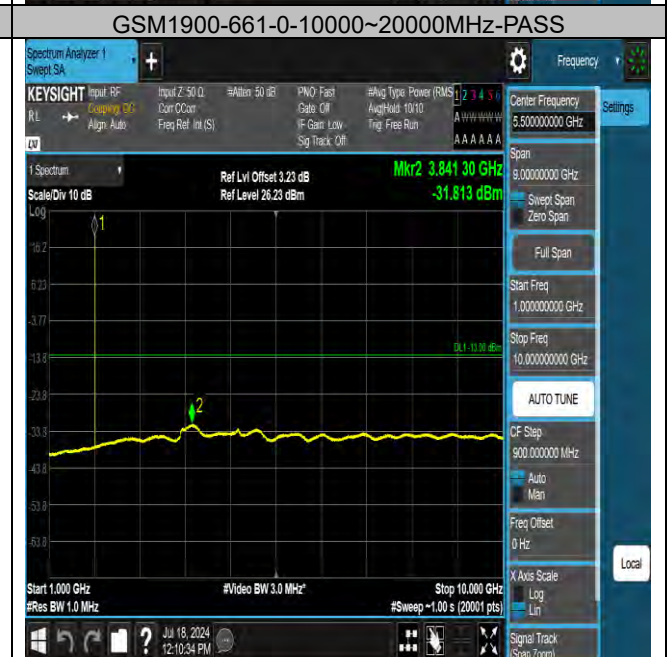

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd


Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU
VERITAS

Test Report No.: W7L-240618W001RF06

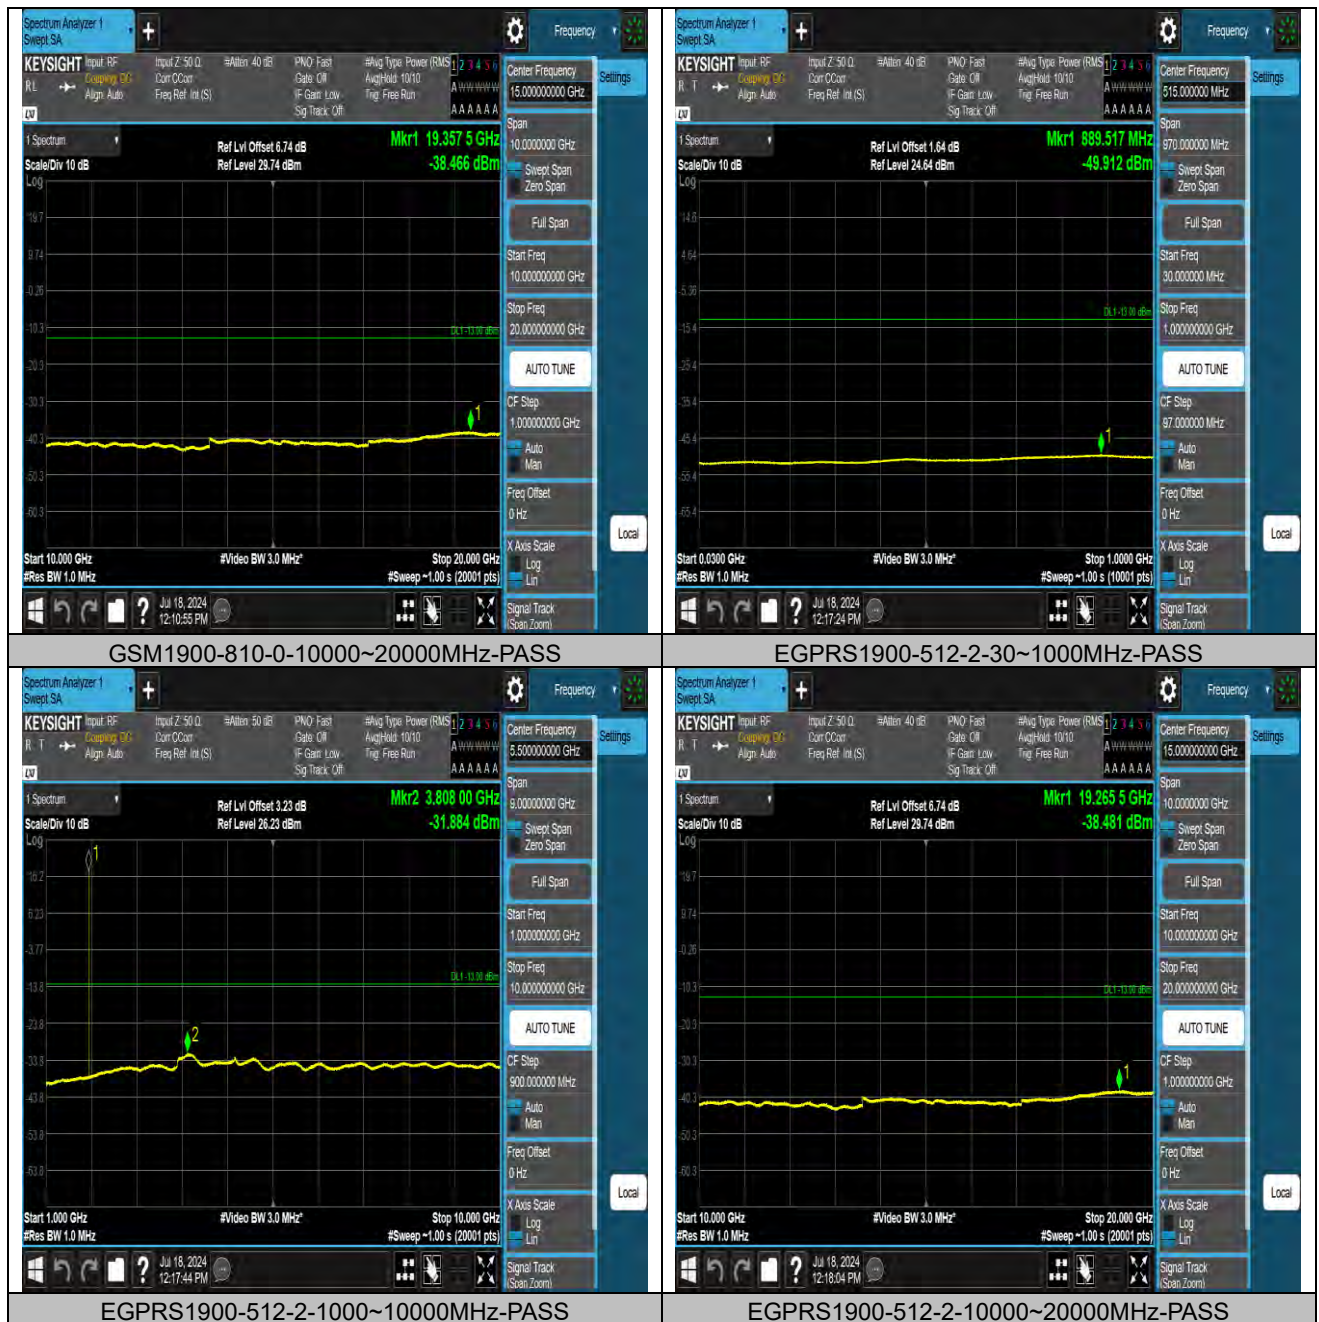

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU
VERITAS

Test Report No.: W7L-240618W001RF06



EGPRS1900-661-2-30~1000MHz-PASS

EGPRS1900-661-2-1000~10000MHz-PASS




EGPRS1900-661-2-10000~20000MHz-PASS

EGPRS1900-810-2-30~1000MHz-PASS



BUREAU
VERITAS

Test Report No.: W7L-240618W001RF06

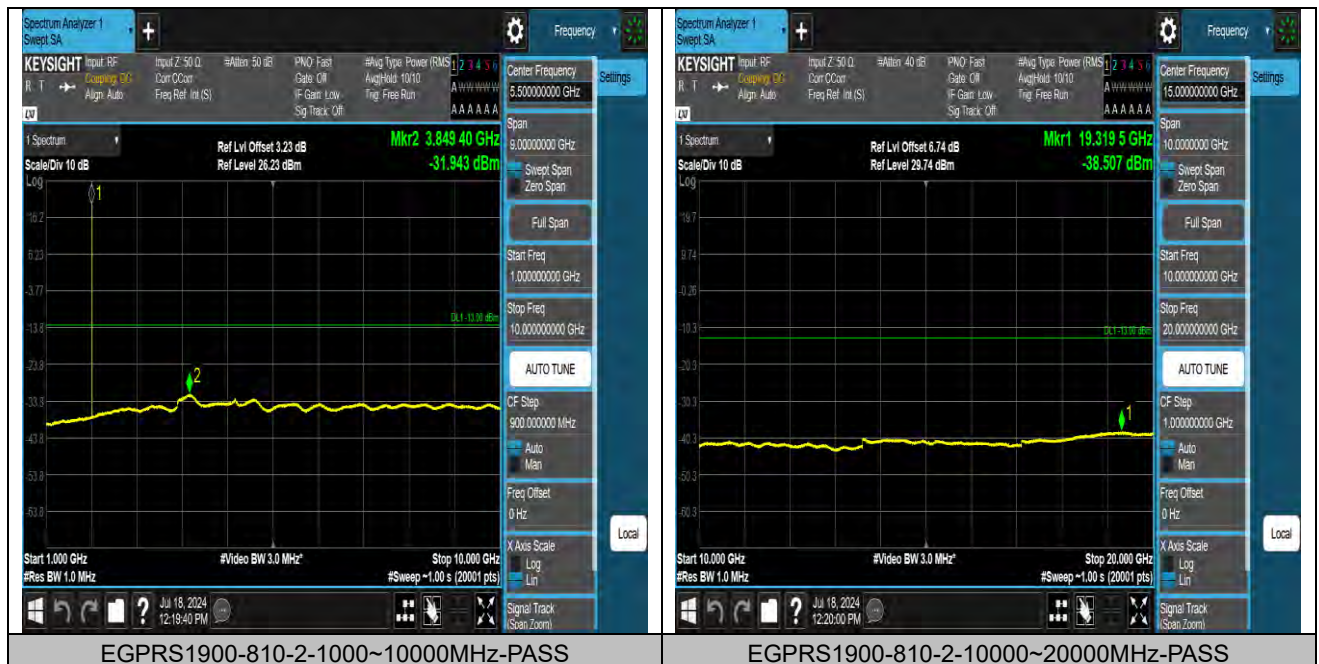

FREQUENCY STABILITY

Test Result

Voltage									
Band	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	FL (MHz)	FH (MHz)	Limit (MHz)	Verdict
GSM1900	512	VN	NT	980.00	0.529672	1850.07893	---	1850-1910	PASS
GSM1900	512	VL	NT	-370.00	-0.199978	1850.07797	---	1850-1910	PASS
GSM1900	512	VH	NT	-590.00	-0.318884	1850.07861	---	1850-1910	PASS
GSM1900	810	VN	NT	-450.00	-0.235627	---	1909.92298	1850-1910	PASS
GSM1900	810	VL	NT	790.00	0.413656	---	1909.923565	1850-1910	PASS
GSM1900	810	VH	NT	320.00	0.167557	---	1909.922135	1850-1910	PASS

Temperature									
Band	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	FL (MHz)	FH (MHz)	Limit (MHz)	Verdict
GSM1900	512	NV	-30	330.00	0.178359	1850.078635	---	1850-1910	PASS
GSM1900	512	NV	-20	110.00	0.059453	1850.078565	---	1850-1910	PASS
GSM1900	512	NV	-10	1410.00	0.762080	1850.07898	---	1850-1910	PASS
GSM1900	512	NV	0	20.00	0.010810	1850.078135	---	1850-1910	PASS
GSM1900	512	NV	10	340.00	0.183764	1850.078275	---	1850-1910	PASS
GSM1900	512	NV	20	870.00	0.470219	1850.078585	---	1850-1910	PASS
GSM1900	512	NV	30	270.00	0.145930	1850.077895	---	1850-1910	PASS
GSM1900	512	NV	40	140.00	0.075667	1850.07738	---	1850-1910	PASS
GSM1900	512	NV	50	-700.00	-0.378337	1850.07712	---	1850-1910	PASS
GSM1900	810	NV	-30	700.00	0.366531	---	1909.923135	1850-1910	PASS
GSM1900	810	NV	-20	310.00	0.162321	---	1909.92238	1850-1910	PASS
GSM1900	810	NV	-10	1510.00	0.790659	---	1909.924865	1850-1910	PASS



BUREAU
VERITAS

Test Report No.: W7L-240618W001RF06

GSM190 0	810	NV	0	980.00	0.513143	---	1909.922 99	1850-191 0	PASS
GSM190 0	810	NV	10	590.00	0.308933	---	1909.923 805	1850-191 0	PASS
GSM190 0	810	NV	20	1000.00	0.523615	---	1909.923 5	1850-191 0	PASS
GSM190 0	810	NV	30	-630.00	-0.32987 7	---	1909.923 23	1850-191 0	PASS
GSM190 0	810	NV	40	810.00	0.424128	---	1909.922 535	1850-191 0	PASS
GSM190 0	810	NV	50	-320.00	-0.16755 7	---	1909.921 44	1850-191 0	PASS



Test Report No.: W7L-240618W001RF06


WCDMA BAND2

PEAK-TO-AVERAGE RATIO

Test Result

Band	Channel	Peak-to-Average Ratio(dB)	Limit(dBm)	Verdict
Band2	9262	3.05	13	PASS
Band2	9400	3.1	13	PASS
Band2	9538	2.96	13	PASS

Test Graphs

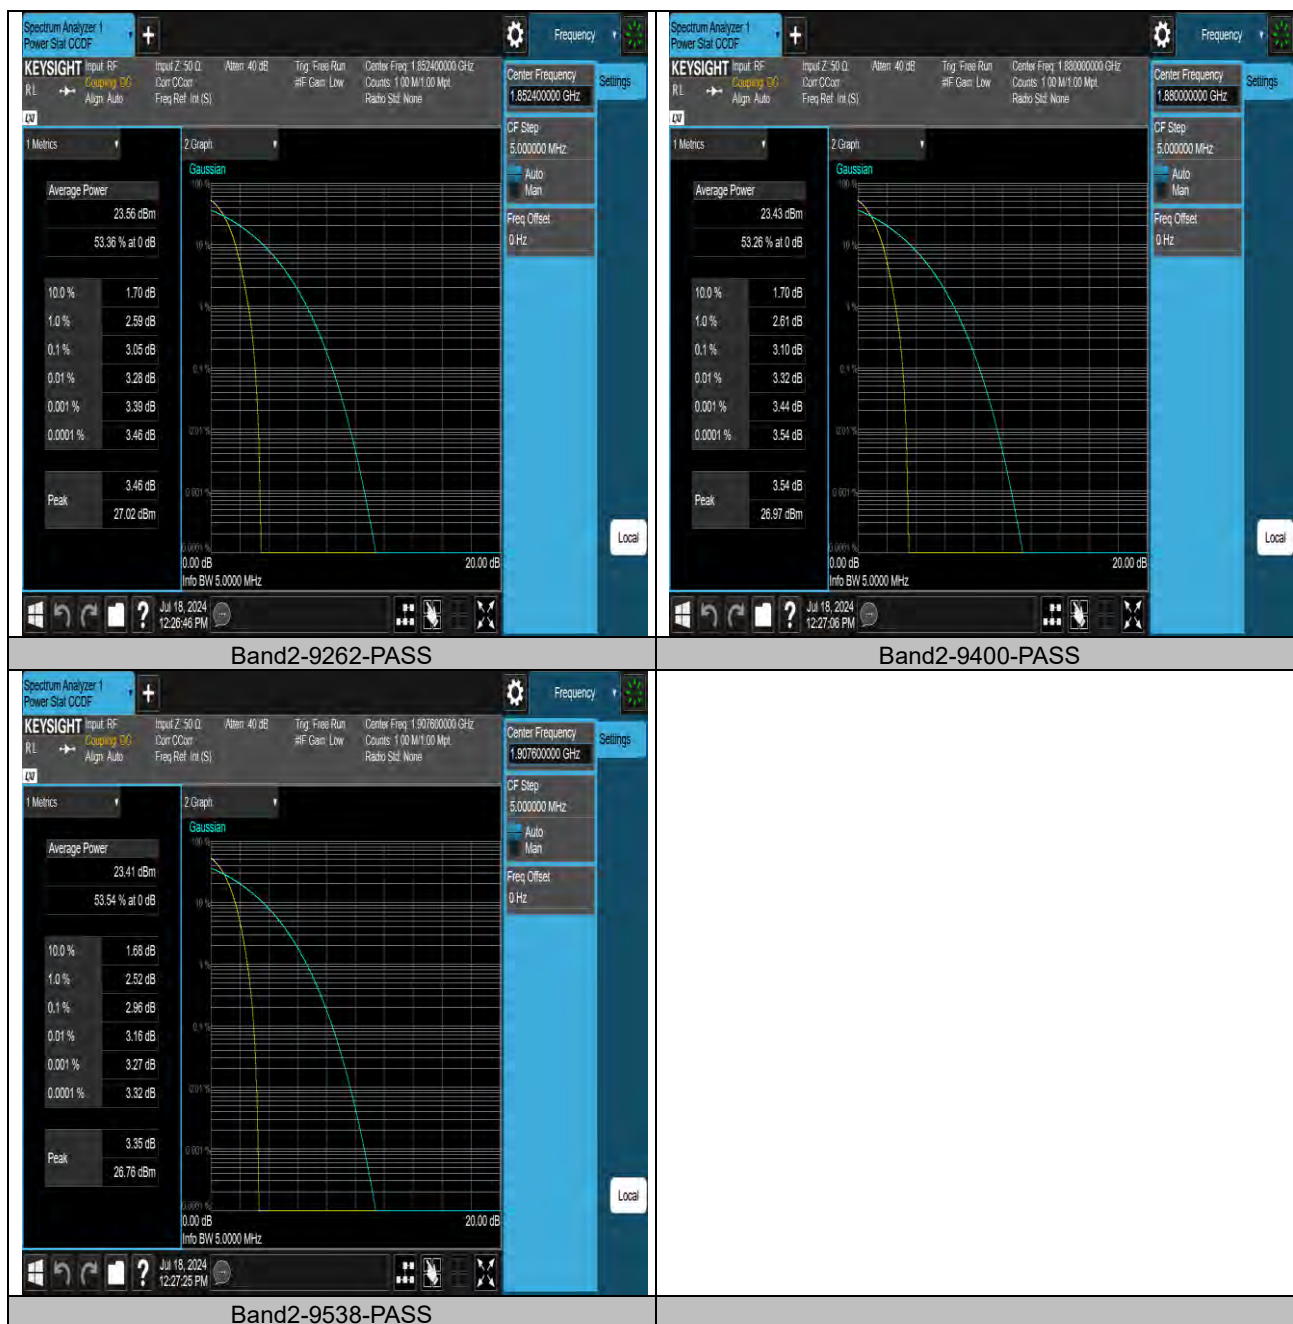

26DB BANDWIDTH AND OCCUPIED BANDWIDTH

Test Result

Band	Channel	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Limit(MHz)	Verdict
Band2	9262	4.1436	4.693	---	PASS
Band2	9400	4.1422	4.691	---	PASS
Band2	9538	4.1424	4.693	---	PASS

Test Graphs





Test Report No.: W7L-240618W001RF06

BAND EDGE

Test Result

Band	Channel	Frequency (MHz)	Result (dBm)	Limit(dBm)	Verdict
Band2	9262	1849.86	-27.23	-13	PASS
Band2	9538	1910.00	-28.47	-13	PASS

Test Graphs



CONDUCTED SPURIOUS EMISSION

Test Result

Band	Channel	Frequency Range (Mhz)	Frequency (dBm)	Result (dBm)	Limit (dBm)	Verdict
Band2	9262	30~1000MHz	889.71	-49.14	-13	PASS
Band2	9262	1000~10000MHz	3817.45	-40.93	-13	PASS
Band2	9262	10000~20000MHz	19351.5	-37.57	-13	PASS
Band2	9400	30~1000MHz	901.74	-49.15	-13	PASS
Band2	9400	1000~10000MHz	3833.2	-40.63	-13	PASS
Band2	9400	10000~20000MHz	19526	-37.45	-13	PASS
Band2	9538	30~1000MHz	885.83	-49.03	-13	PASS
Band2	9538	1000~10000MHz	3873.7	-41.1	-13	PASS
Band2	9538	10000~20000MHz	19463.5	-36.98	-13	PASS


Test Graphs





BUREAU
VERITAS

Test Report No.: W7L-240618W001RF06

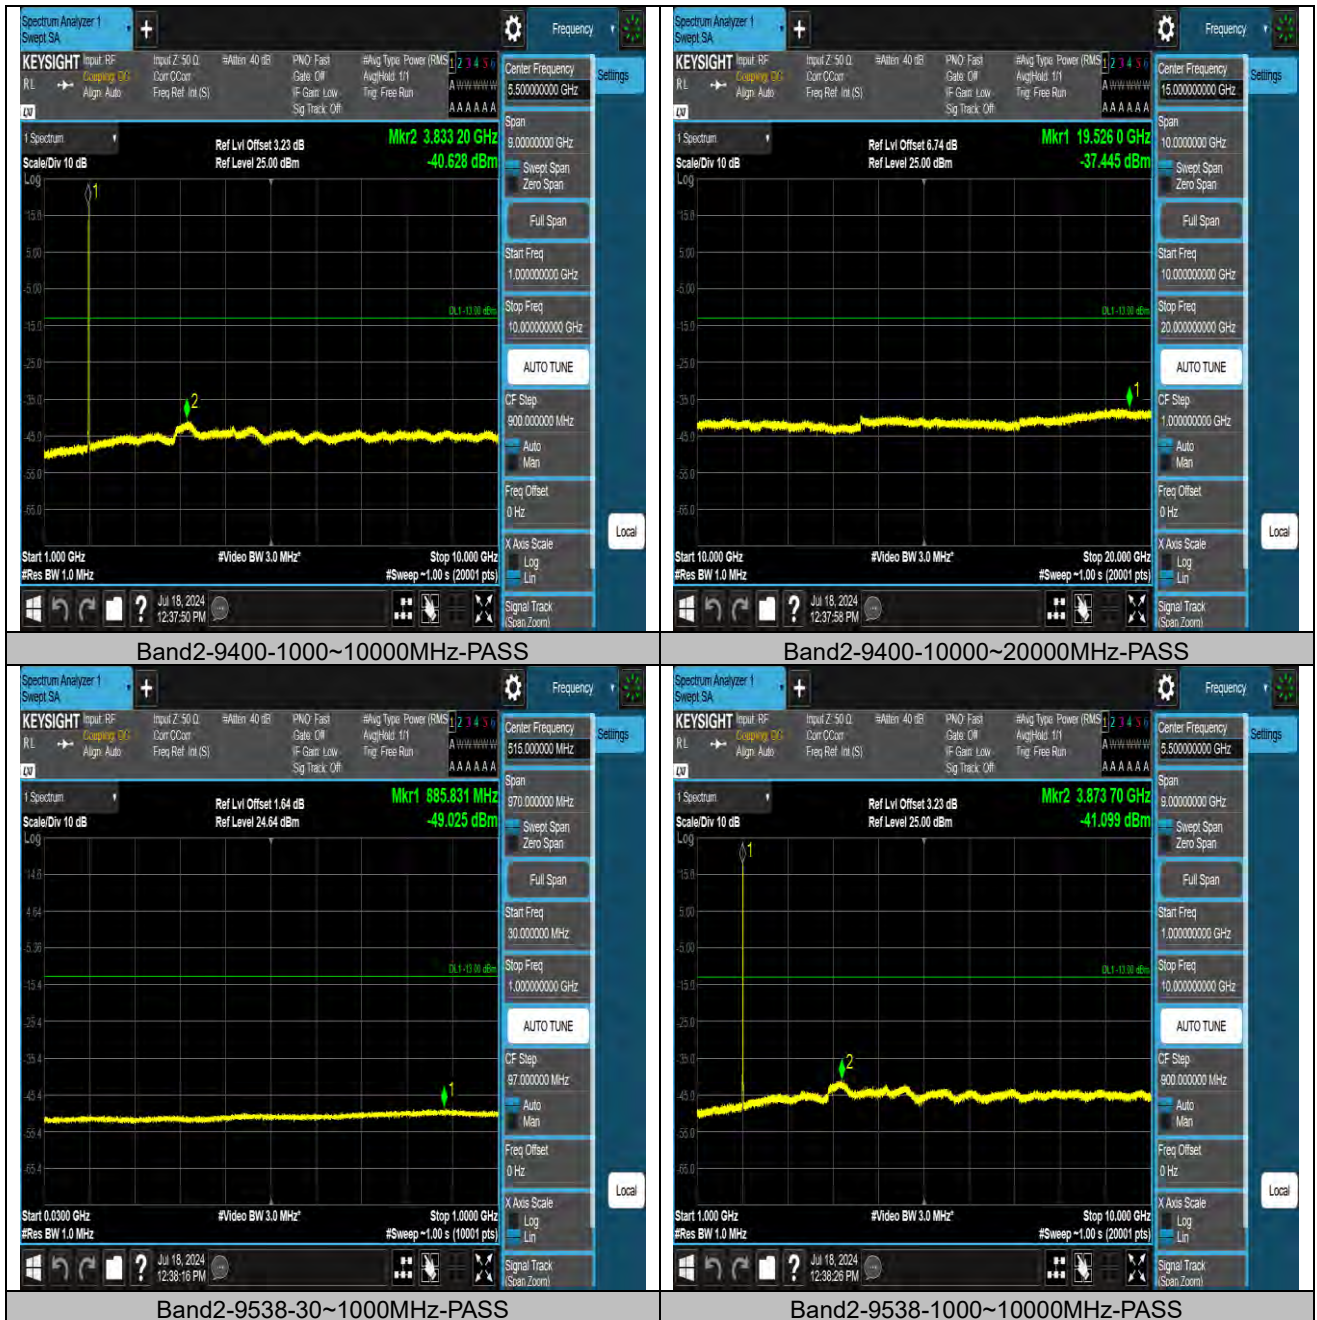

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU
VERITAS

Test Report No.: W7L-240618W001RF06



Band2-9538-10000~20000MHz-PASS

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com

FREQUENCY STABILITY

Test Result

Voltage									
Band	Channel	Voltage (Vdc)	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	FL (MHz)	FH (MHz)	Limit (MHz)	Verdict
Band2	9262	VN	NT	-3600.00	-1.943425	1850.32635	---	1850-1910	PASS
Band2	9262	VL	NT	-7500.00	-4.048802	1850.3212	---	1850-1910	PASS
Band2	9262	VH	NT	-4290.00	-2.315914	1850.32306	---	1850-1910	PASS
Band2	9538	VN	NT	-7300.00	-3.826798	---	1909.6668	1850-1910	PASS
Band2	9538	VL	NT	-8600.00	-4.508283	---	1909.6667	1850-1910	PASS
Band2	9538	VH	NT	-7130.00	-3.737681	---	1909.66707	1850-1910	PASS

Temperature									
Band	Channel	Voltage (Vdc)	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	FL (MHz)	FH (MHz)	Limit (MHz)	Verdict
Band2	9262	NV	-30	-7820.00	-4.221550	1850.32233	---	1850-1910	PASS
Band2	9262	NV	-20	-5970.00	-3.222846	1850.32033	---	1850-1910	PASS
Band2	9262	NV	-10	-8930.00	-4.820773	1850.32107	---	1850-1910	PASS
Band2	9262	NV	0	-9940.00	-5.366012	1850.32061	---	1850-1910	PASS
Band2	9262	NV	10	-3730.00	-2.013604	1850.32057	---	1850-1910	PASS
Band2	9262	NV	20	-8010.00	-4.324120	1850.32364	---	1850-1910	PASS
Band2	9262	NV	30	-3670.00	-1.981214	1850.32383	---	1850-1910	PASS
Band2	9262	NV	40	-4780.00	-2.580436	1850.32347	---	1850-1910	PASS
Band2	9262	NV	50	-5810.00	-3.136472	1850.32054	---	1850-1910	PASS
Band2	9538	NV	-30	-7630.00	-3.999790	---	1909.66727	1850-1910	PASS
Band2	9538	NV	-20	-6860.00	-3.596142	---	1909.66824	1850-1910	PASS
Band2	9538	NV	-10	-6550.00	-3.433634	---	1909.67	1850-1910	PASS
Band2	9538	NV	0	-10400.00	-5.4518	---	1909.6	1850-1910	PASS



**BUREAU
VERITAS**

Test Report No.: W7L-240618W001RF06

				00	77		625	910	
Band2	9538	NV	10	-9760.0 0	-5.1163 77	---	1909.6 6169	1850-1 910	PASS
Band2	9538	NV	20	-7490.0 0	-3.9264 00	---	1909.6 6881	1850-1 910	PASS
Band2	9538	NV	30	-7080.0 0	-3.7114 70	---	1909.6 6807	1850-1 910	PASS
Band2	9538	NV	40	-10530. 00	-5.5200 25	---	1909.6 6512	1850-1 910	PASS
Band2	9538	NV	50	-10250. 00	-5.3732 44	---	1909.6 6235	1850-1 910	PASS



Test Report No.: W7L-240618W001RF06


LTE BAND 2

PEAK-TO-AVERAGE RATIO(CCDF)

Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dB)	Limit(dB)	Verdict
Band2	20MHz	QPSK	18700	1RB#0	3.90	13	PASS
Band2	20MHz	QPSK	18700	100RB#0	5.40	13	PASS
Band2	20MHz	QPSK	18900	1RB#0	4.06	13	PASS
Band2	20MHz	QPSK	18900	100RB#0	5.48	13	PASS
Band2	20MHz	QPSK	19100	1RB#0	4.21	13	PASS
Band2	20MHz	QPSK	19100	100RB#0	5.37	13	PASS

Test Graphs

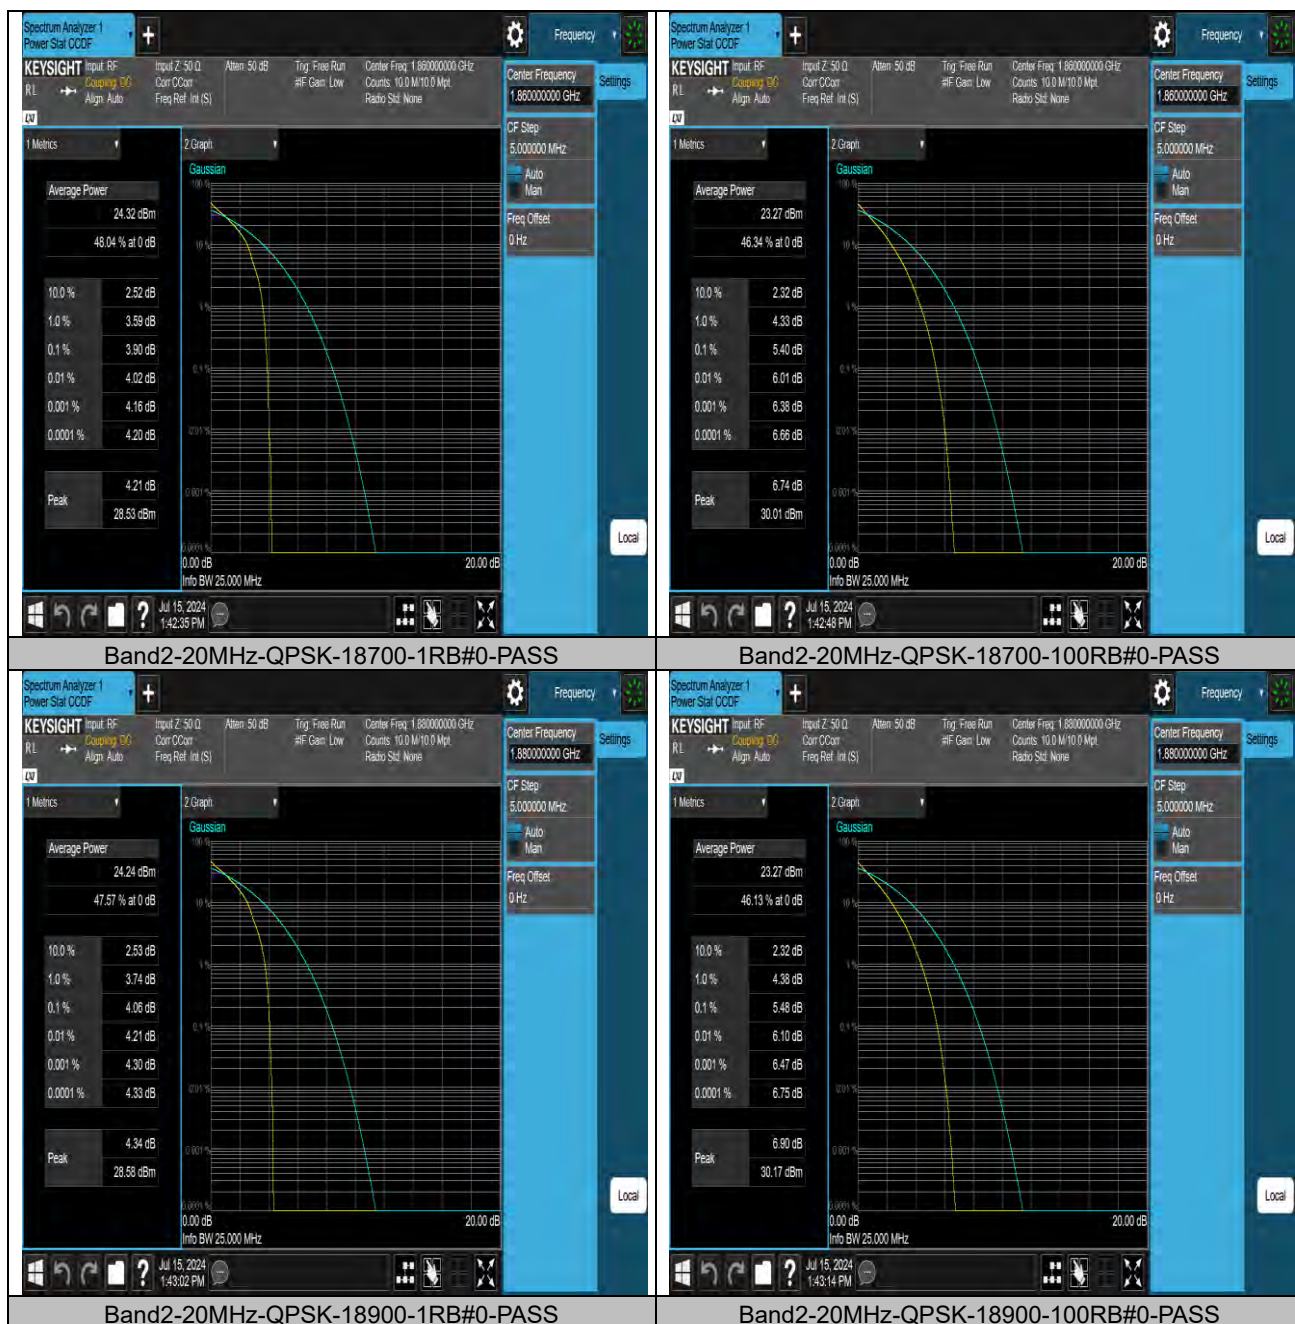



BUREAU
VERITAS

Test Report No.: W7L-240618W001RF06




26DB BANDWIDTH AND OCCUPIED BANDWIDTH

Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
Band2	1.4MHz	QPSK	18607	6RB#0	1.0878	1.300	PASS
Band2	1.4MHz	QPSK	18900	6RB#0	1.0888	1.291	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	1.0902	1.304	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	1.0978	1.306	PASS
Band2	1.4MHz	16QAM	18900	6RB#0	1.0990	1.309	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	1.0994	1.308	PASS
Band2	3MHz	QPSK	18615	15RB#0	2.6926	2.932	PASS
Band2	3MHz	QPSK	18900	15RB#0	2.6904	2.921	PASS
Band2	3MHz	QPSK	19185	15RB#0	2.6896	2.928	PASS
Band2	3MHz	16QAM	18615	15RB#0	2.6957	2.916	PASS
Band2	3MHz	16QAM	18900	15RB#0	2.6912	2.941	PASS
Band2	3MHz	16QAM	19185	15RB#0	2.6907	2.932	PASS
Band2	5MHz	QPSK	18625	25RB#0	4.5058	5.015	PASS
Band2	5MHz	QPSK	18900	25RB#0	4.5092	5.022	PASS
Band2	5MHz	QPSK	19175	25RB#0	4.5096	5.027	PASS
Band2	5MHz	16QAM	18625	25RB#0	4.5016	5.010	PASS
Band2	5MHz	16QAM	18900	25RB#0	4.5031	4.997	PASS
Band2	5MHz	16QAM	19175	25RB#0	4.5045	5.000	PASS
Band2	10MHz	QPSK	18650	50RB#0	9.0016	9.841	PASS
Band2	10MHz	QPSK	18900	50RB#0	8.9913	9.834	PASS
Band2	10MHz	QPSK	19150	50RB#0	9.0008	9.811	PASS
Band2	10MHz	16QAM	18650	50RB#0	9.0051	9.795	PASS
Band2	10MHz	16QAM	18900	50RB#0	8.9944	9.784	PASS
Band2	10MHz	16QAM	19150	50RB#0	8.9987	9.796	PASS
Band2	15MHz	QPSK	18675	75RB#0	13.495	14.77	PASS
Band2	15MHz	QPSK	18900	75RB#0	13.495	14.77	PASS
Band2	15MHz	QPSK	19125	75RB#0	13.480	14.61	PASS
Band2	15MHz	16QAM	18675	75RB#0	13.473	14.71	PASS
Band2	15MHz	16QAM	18900	75RB#0	13.490	14.67	PASS
Band2	15MHz	16QAM	19125	75RB#0	13.474	14.68	PASS
Band2	20MHz	QPSK	18700	100RB#0	17.990	19.45	PASS
Band2	20MHz	QPSK	18900	100RB#0	17.991	19.44	PASS
Band2	20MHz	QPSK	19100	100RB#0	17.957	19.50	PASS
Band2	20MHz	16QAM	18700	100RB#0	17.939	19.42	PASS
Band2	20MHz	16QAM	18900	100RB#0	17.974	19.41	PASS
Band2	20MHz	16QAM	19100	100RB#0	17.925	19.48	PASS


Test Graphs

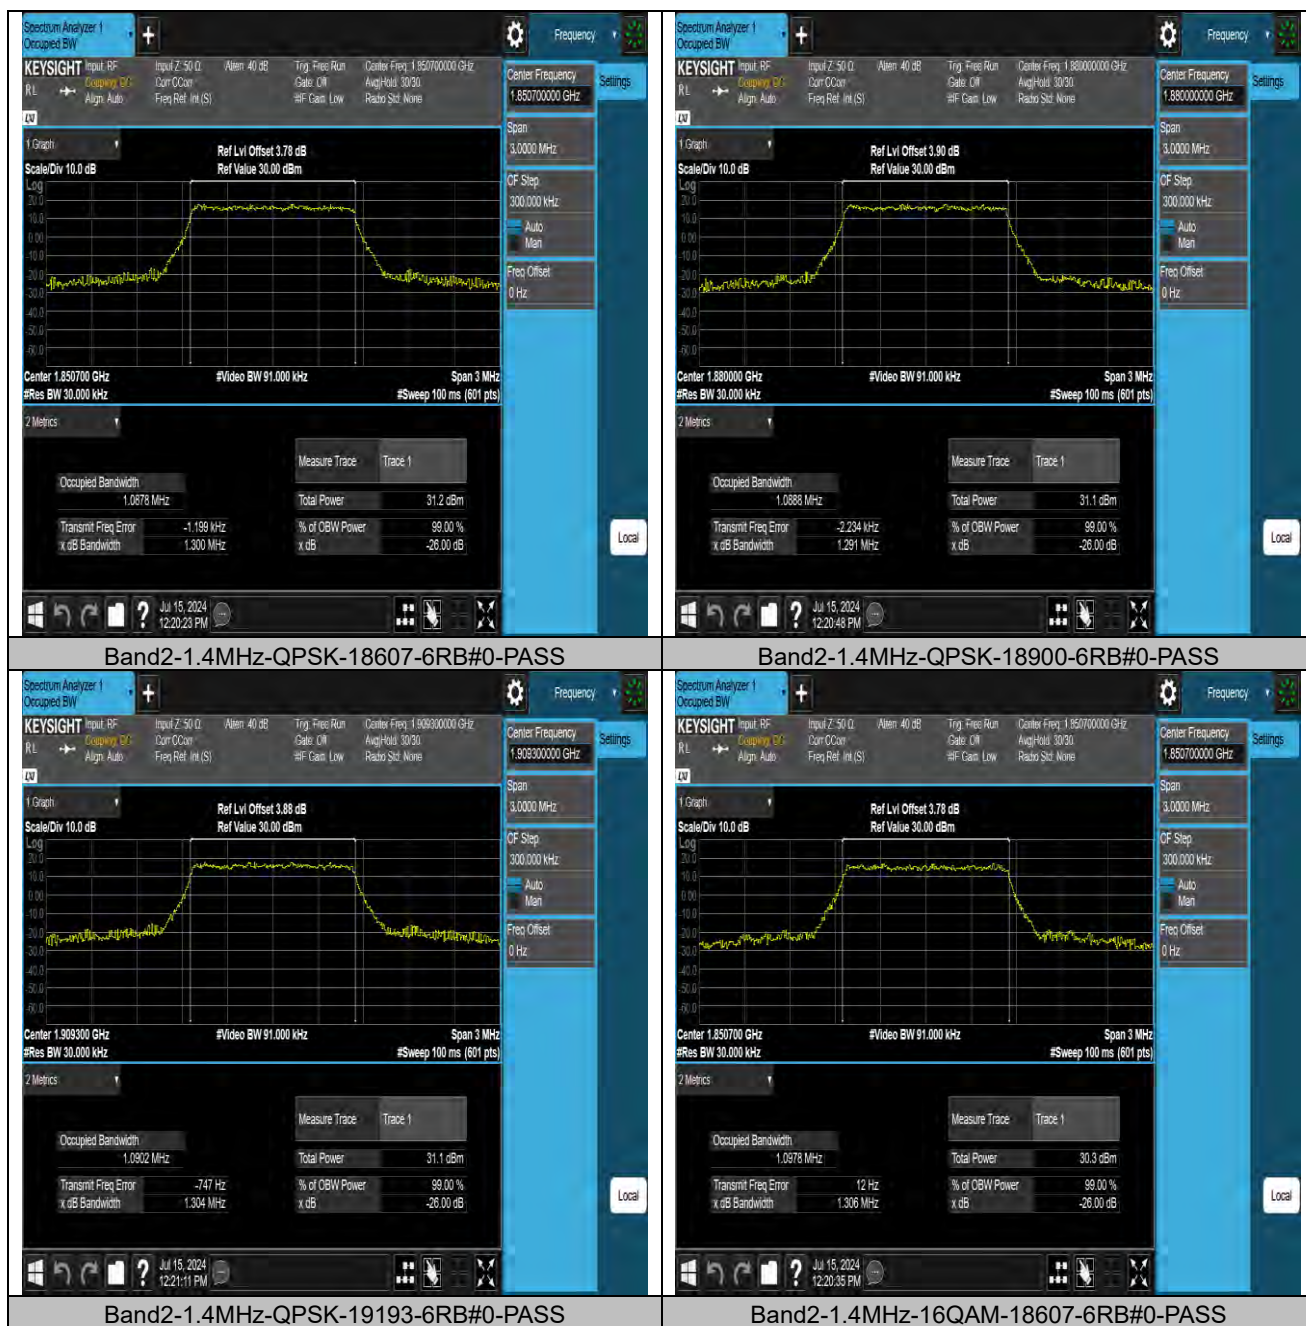



BUREAU
VERITAS


Test Report No.: W7L-240618W001RF06

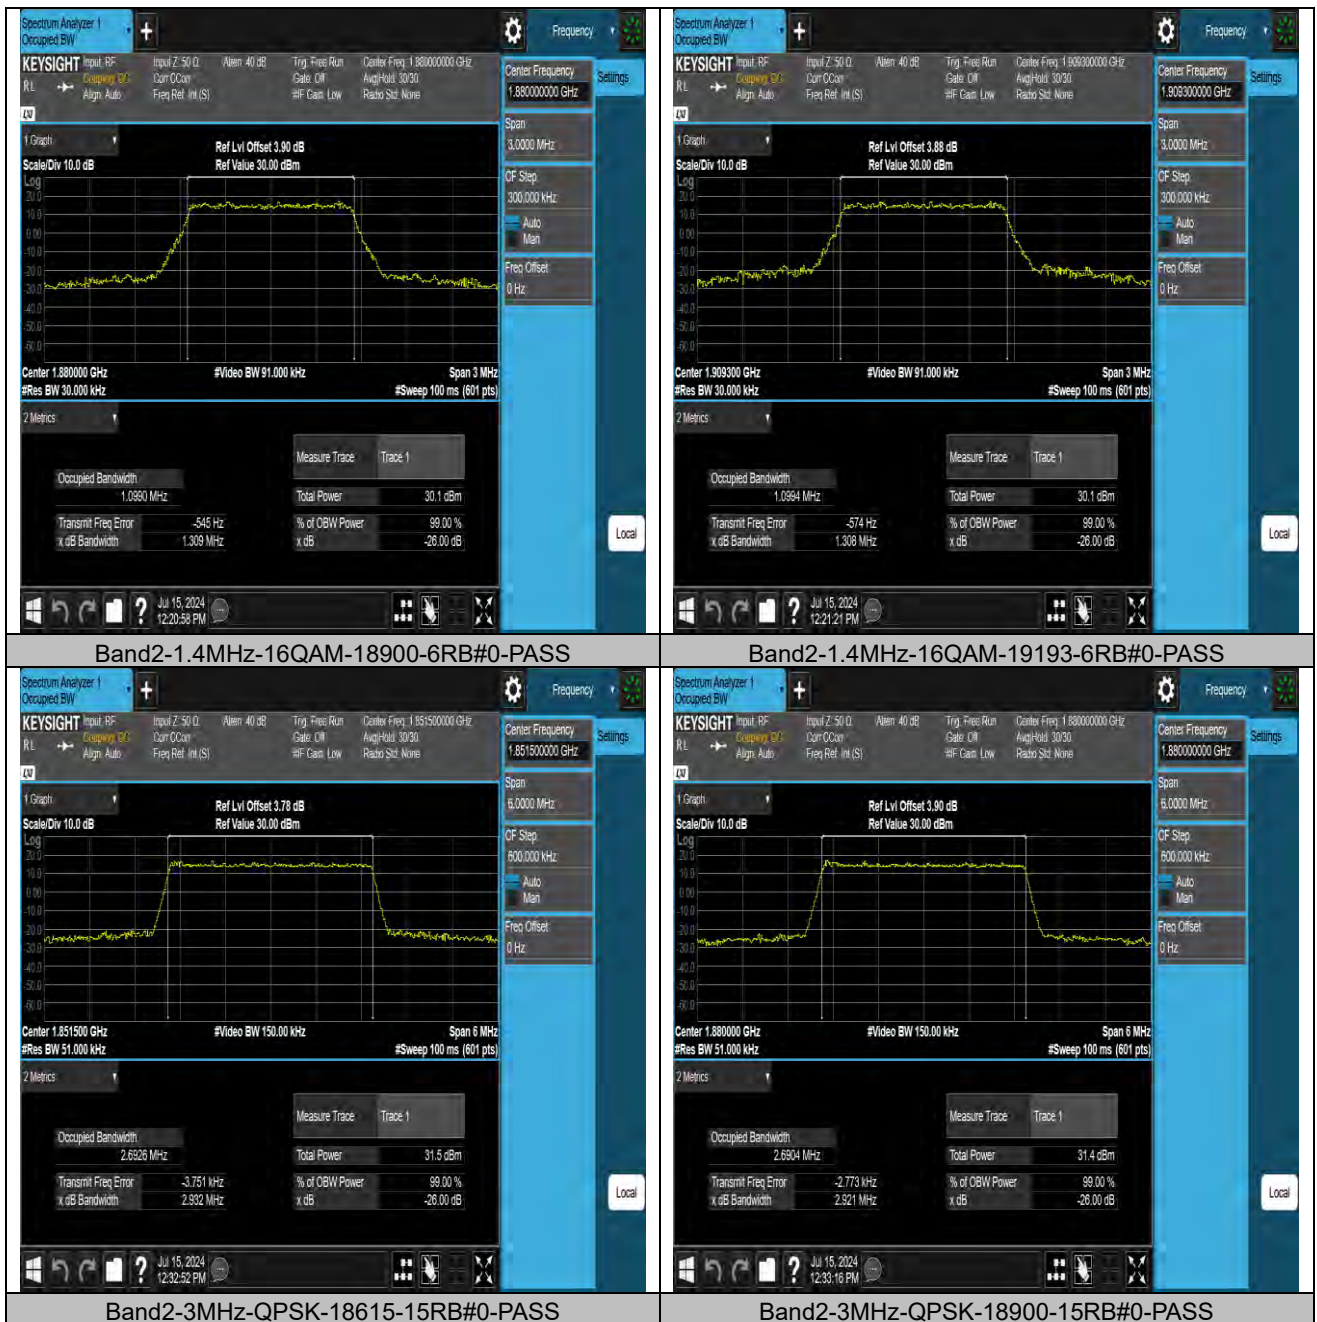



BUREAU
VERITAS

Test Report No.: W7L-240618W001RF06

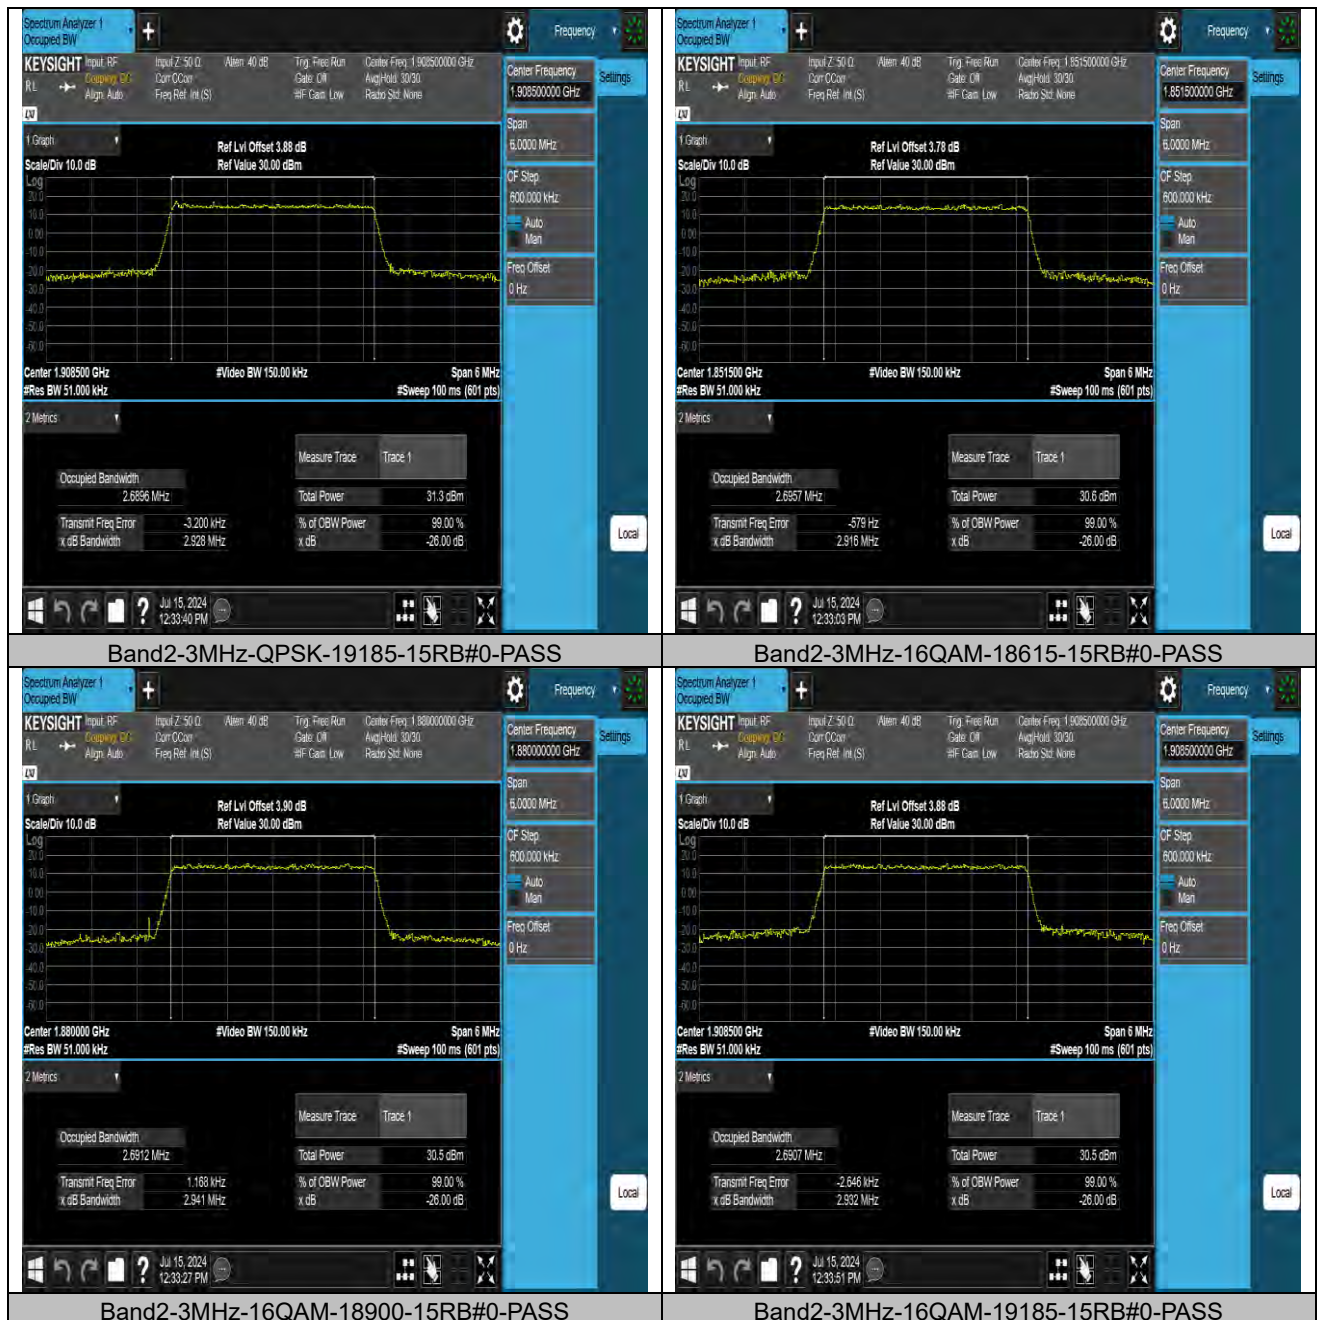




BUREAU
VERITAS

Test Report No.: W7L-240618W001RF06




Band2-5MHz-QPSK-18625-25RB#0-PASS

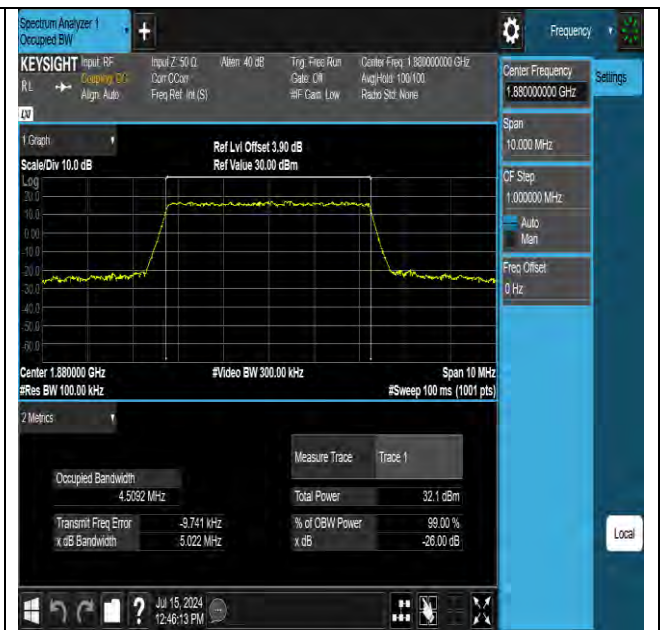

Band2-5MHz-QPSK-18900-25RB#0-PASS



Band2-5MHz-QPSK-19175-25RB#0-PASS

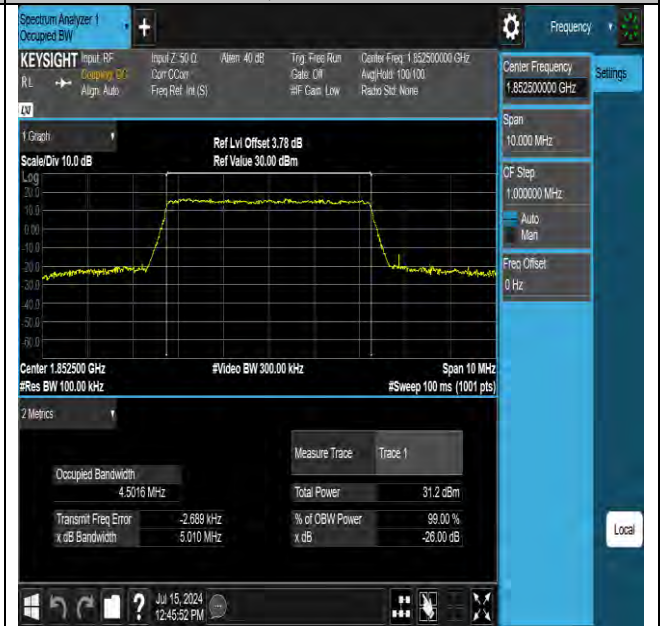


Band2-5MHz-16QAM-18625-25RB#0-PASS



BUREAU
VERITAS

Test Report No.: W7L-240618W001RF06

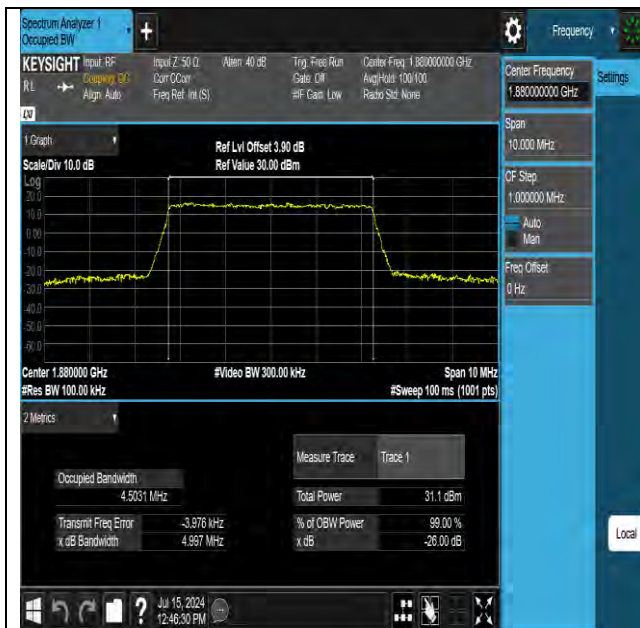

Band2-5MHz-16QAM-18900-25RB#0-PASS



Band2-5MHz-16QAM-19175-25RB#0-PASS



Band2-10MHz-QPSK-18650-50RB#0-PASS




Band2-10MHz-QPSK-18900-50RB#0-PASS



BUREAU
VERITAS

Test Report No.: W7L-240618W001RF06

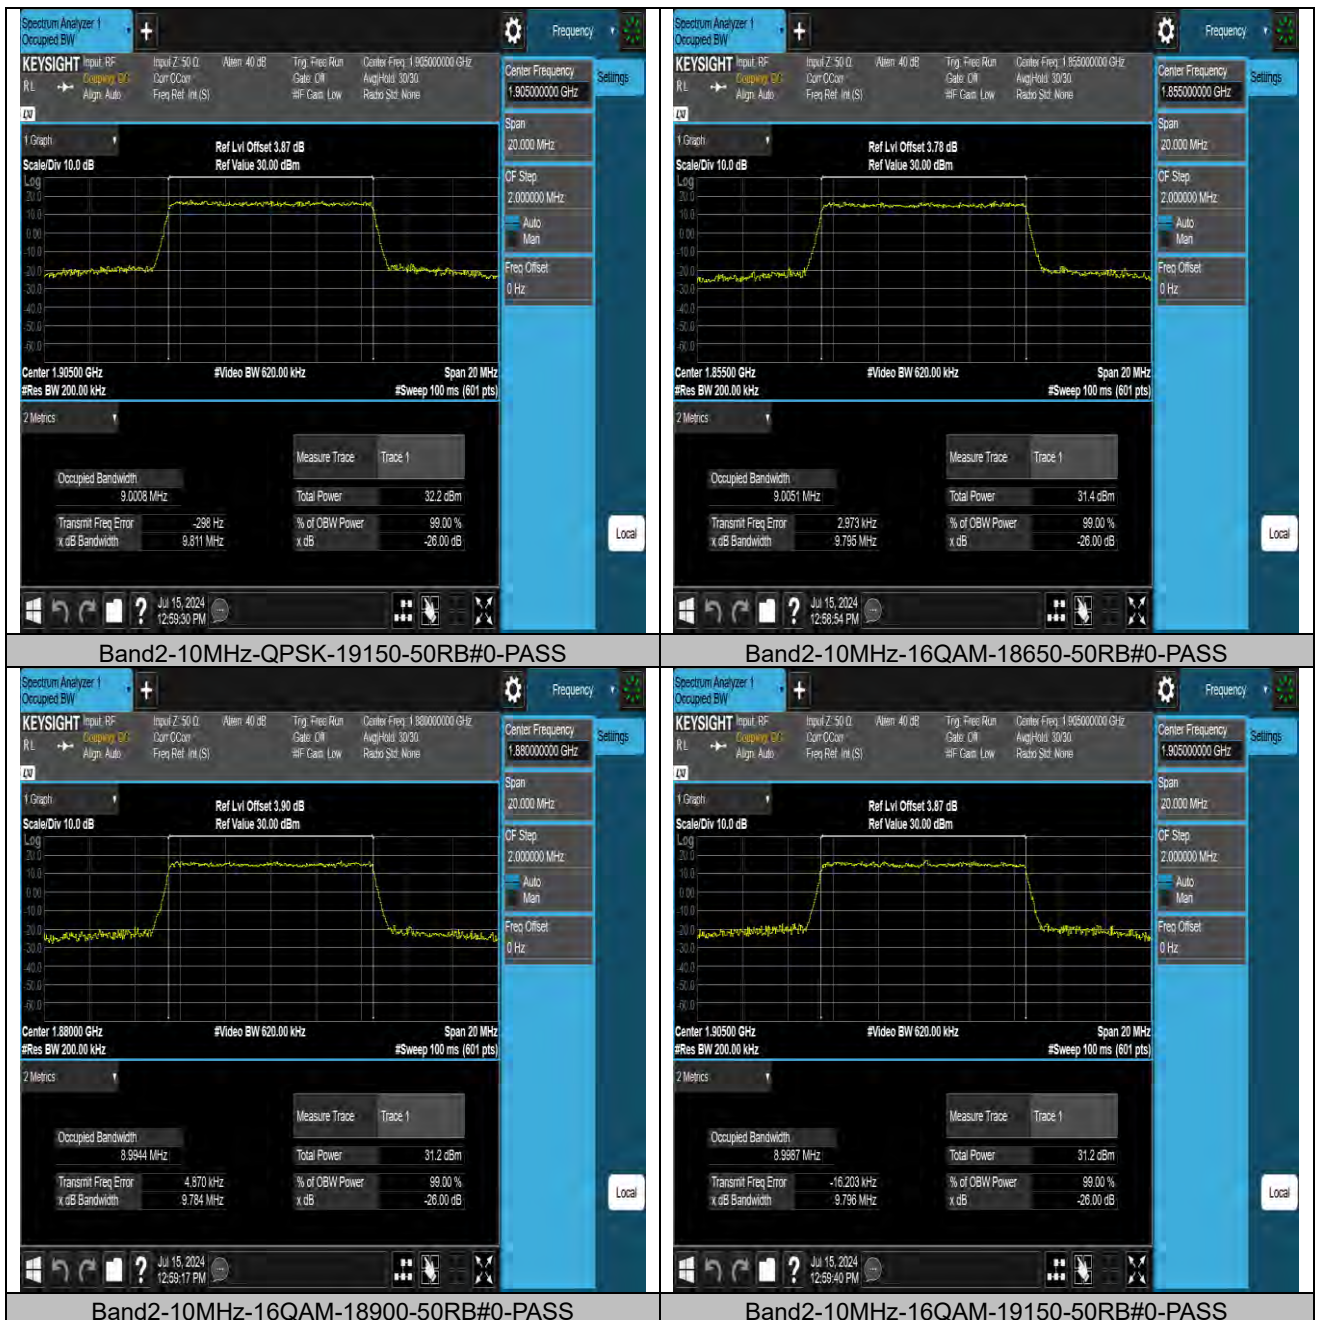

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd


Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU
VERITAS

Test Report No.: W7L-240618W001RF06

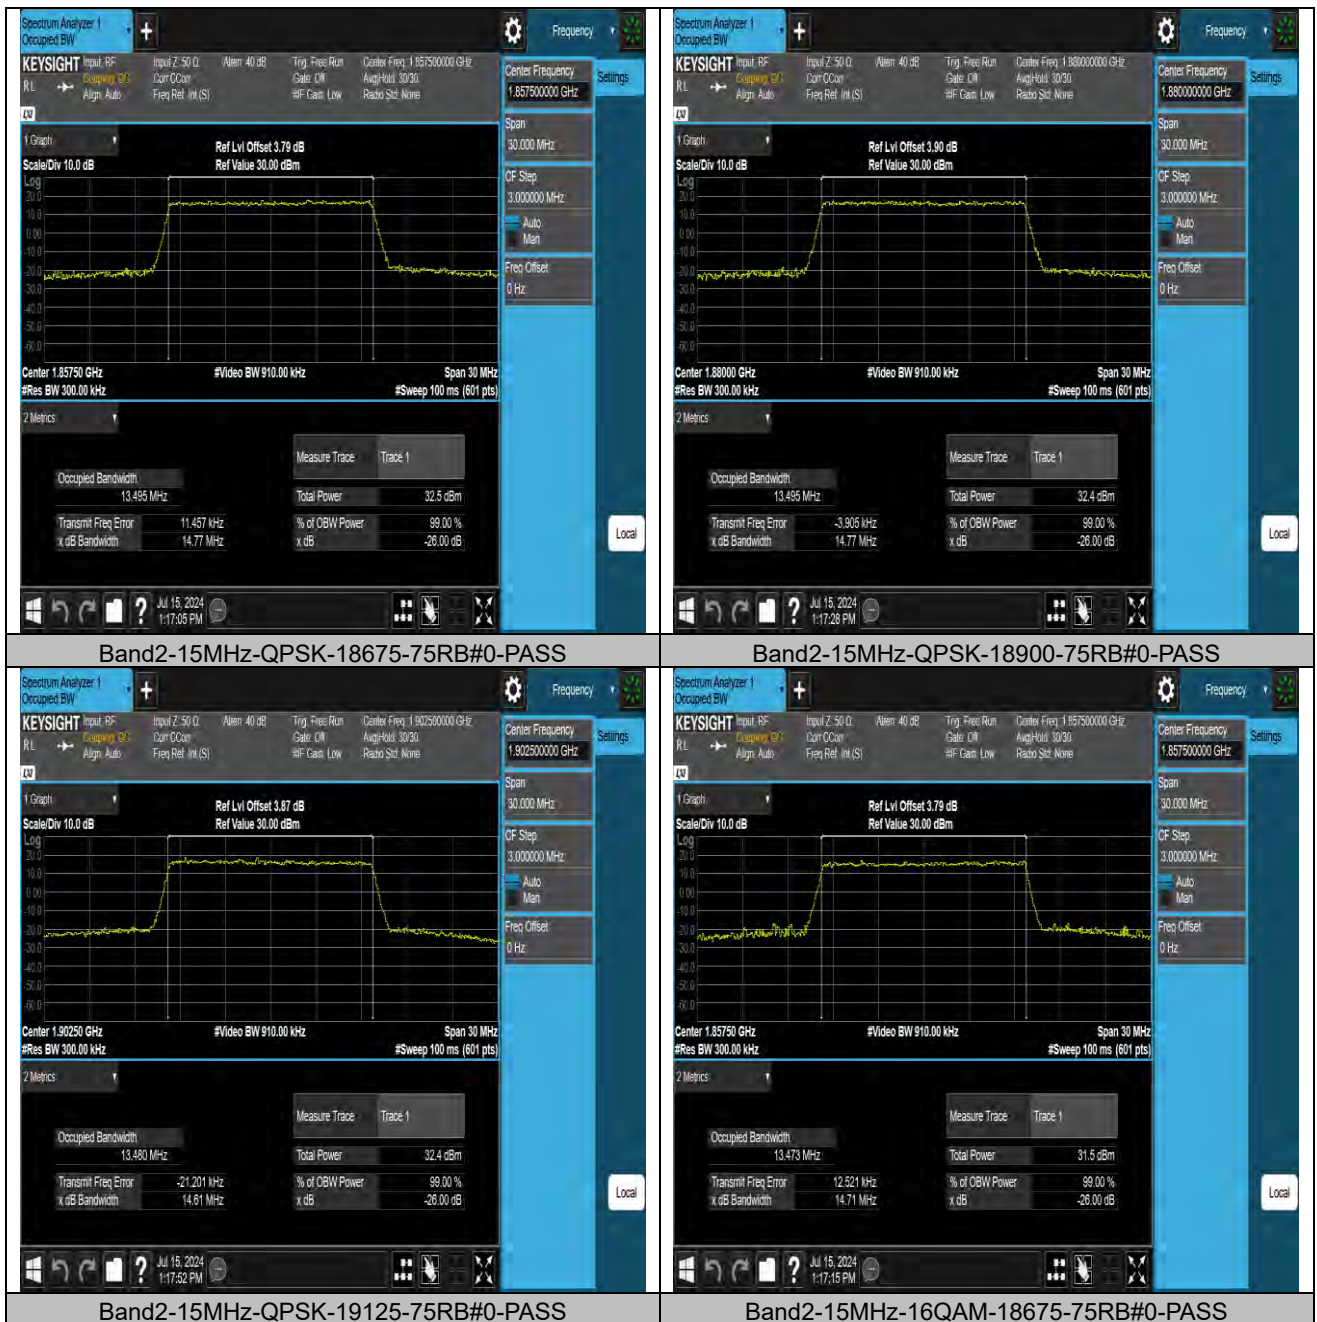



BUREAU
VERITAS

Test Report No.: W7L-240618W001RF06



Band2-15MHz-16QAM-18900-75RB#0-PASS



Band2-15MHz-16QAM-19125-75RB#0-PASS



Band2-20MHz-QPSK-18700-100RB#0-PASS



Band2-20MHz-QPSK-18900-100RB#0-PASS



BUREAU
VERITAS

Test Report No.: W7L-240618W001RF06




Band2-20MHz-QPSK-19100-100RB#0-PASS



Band2-20MHz-16QAM-18700-100RB#0-PASS



Band2-20MHz-16QAM-18900-100RB#0-PASS

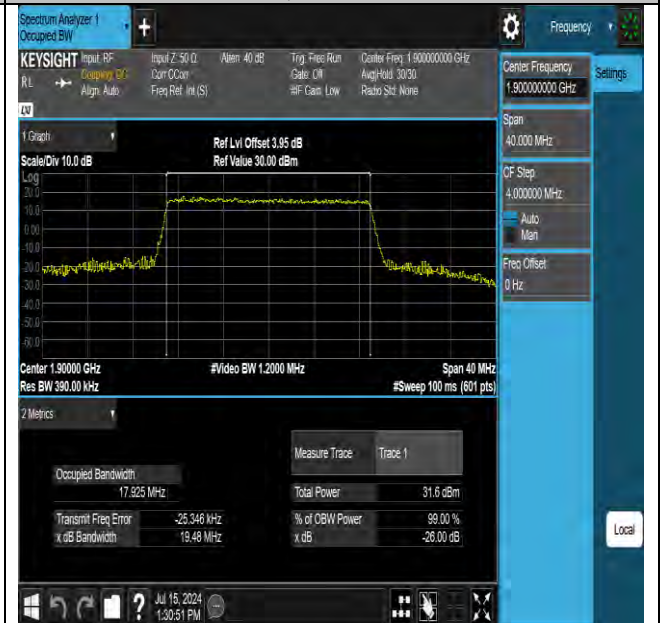

Band2-20MHz-16QAM-19100-100RB#0-PASS

BAND EDGE

Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band2	1.4MHz	QPSK	18607	1RB#0	-24.61	PASS
Band2	1.4MHz	QPSK	18607	6RB#0	-28.64	PASS
Band2	1.4MHz	QPSK	19193	1RB#5	-24.70	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	-28.70	PASS
Band2	1.4MHz	16QAM	18607	1RB#0	-24.75	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	-28.71	PASS
Band2	1.4MHz	16QAM	19193	1RB#5	-27.86	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	-28.62	PASS
Band2	3MHz	QPSK	18615	1RB#0	-21.72	PASS
Band2	3MHz	QPSK	18615	15RB#0	-25.85	PASS
Band2	3MHz	QPSK	19185	1RB#14	-22.04	PASS
Band2	3MHz	QPSK	19185	15RB#0	-24.62	PASS
Band2	3MHz	16QAM	18615	1RB#0	-24.23	PASS
Band2	3MHz	16QAM	18615	15RB#0	-25.92	PASS
Band2	3MHz	16QAM	19185	1RB#14	-24.49	PASS
Band2	3MHz	16QAM	19185	15RB#0	-25.66	PASS
Band2	5MHz	QPSK	18625	1RB#0	-24.08	PASS
Band2	5MHz	QPSK	18625	25RB#0	-26.95	PASS
Band2	5MHz	QPSK	19175	1RB#24	-25.27	PASS
Band2	5MHz	QPSK	19175	25RB#0	-25.26	PASS
Band2	5MHz	16QAM	18625	1RB#0	-24.52	PASS
Band2	5MHz	16QAM	18625	25RB#0	-27.21	PASS
Band2	5MHz	16QAM	19175	1RB#24	-24.91	PASS
Band2	5MHz	16QAM	19175	25RB#0	-26.24	PASS
Band2	10MHz	QPSK	18650	1RB#0	-33.25	PASS
Band2	10MHz	QPSK	18650	50RB#0	-28.84	PASS
Band2	10MHz	QPSK	19150	1RB#49	-33.23	PASS
Band2	10MHz	QPSK	19150	50RB#0	-26.62	PASS
Band2	10MHz	16QAM	18650	1RB#0	-34.03	PASS
Band2	10MHz	16QAM	18650	50RB#0	-29.33	PASS
Band2	10MHz	16QAM	19150	1RB#49	-34.68	PASS
Band2	10MHz	16QAM	19150	50RB#0	-28.24	PASS
Band2	15MHz	QPSK	18675	1RB#0	-36.31	PASS
Band2	15MHz	QPSK	18675	75RB#0	-29.39	PASS
Band2	15MHz	QPSK	19125	1RB#74	-36.27	PASS
Band2	15MHz	QPSK	19125	75RB#0	-28.08	PASS
Band2	15MHz	16QAM	18675	1RB#0	-37.29	PASS
Band2	15MHz	16QAM	18675	75RB#0	-29.93	PASS
Band2	15MHz	16QAM	19125	1RB#74	-37.22	PASS
Band2	15MHz	16QAM	19125	75RB#0	-29.82	PASS
Band2	20MHz	QPSK	18700	1RB#0	-40.86	PASS
Band2	20MHz	QPSK	18700	100RB#0	-30.07	PASS
Band2	20MHz	QPSK	19100	1RB#99	-40.53	PASS




**BUREAU
VERITAS**

Test Report No.: W7L-240618W001RF06

Band2	20MHz	QPSK	19100	100RB#0	-29.91	PASS
Band2	20MHz	16QAM	18700	1RB#0	-41.03	PASS
Band2	20MHz	16QAM	18700	100RB#0	-31.89	PASS
Band2	20MHz	16QAM	19100	1RB#99	-40.89	PASS
Band2	20MHz	16QAM	19100	100RB#0	-31.83	PASS


Test Graphs

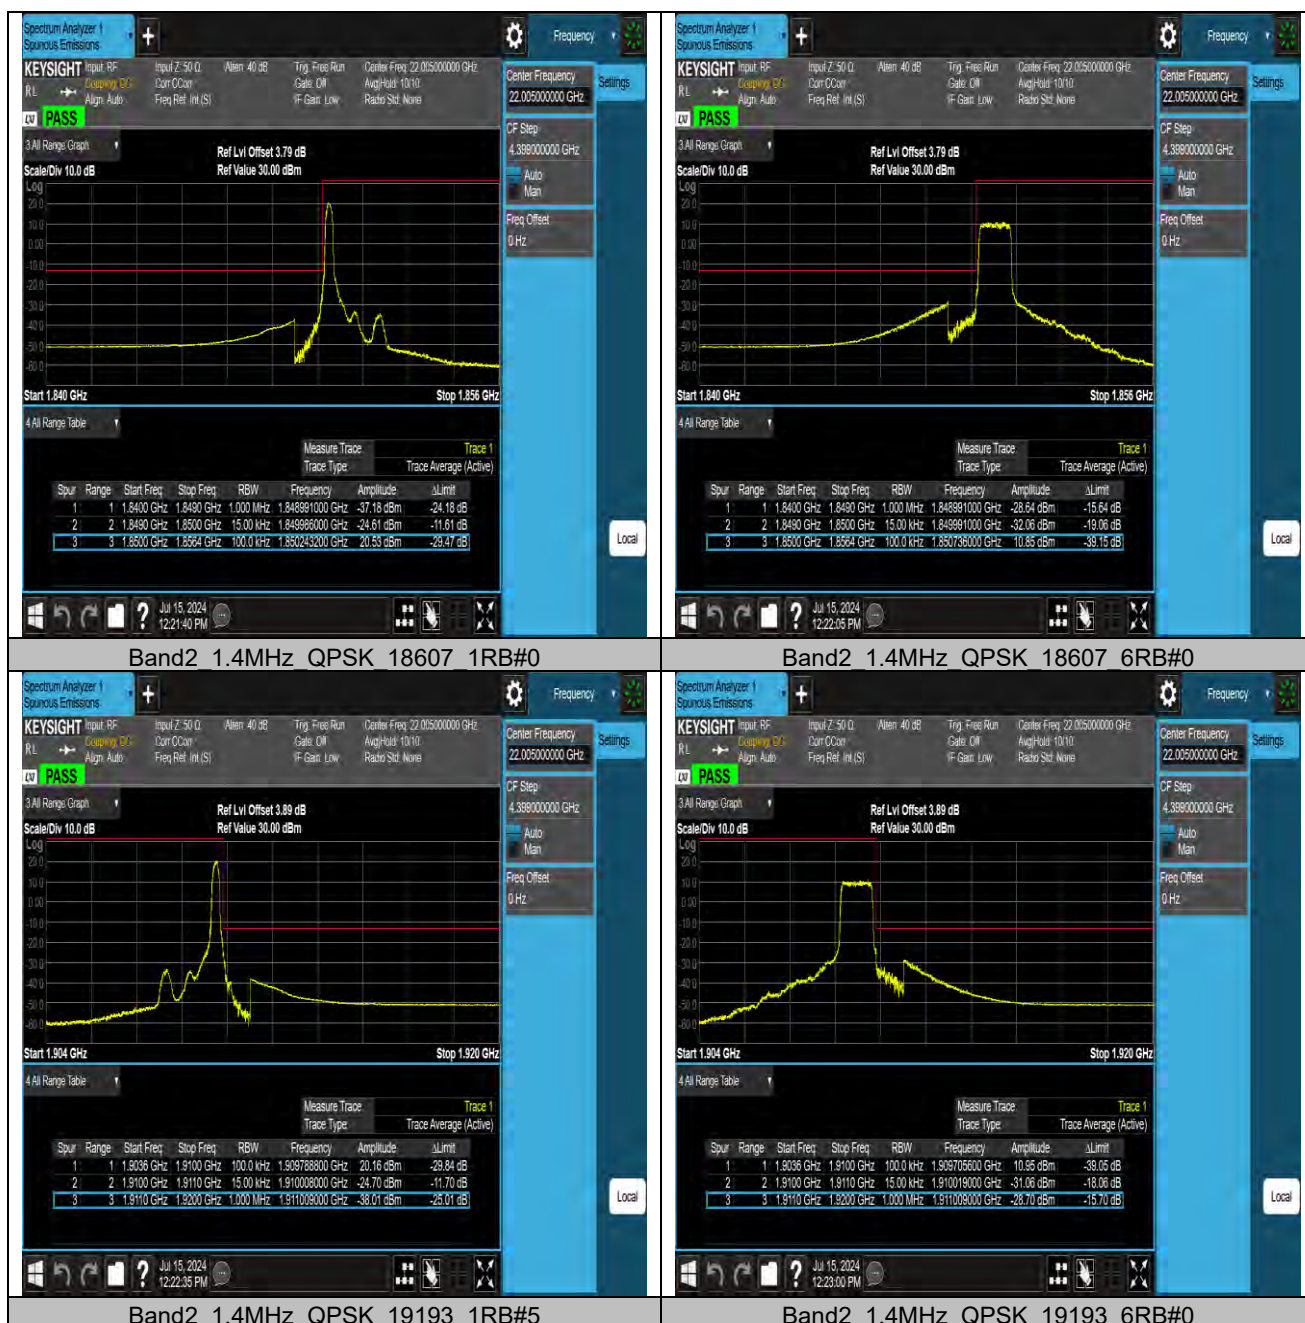



BUREAU
VERITAS


Test Report No.: W7L-240618W001RF06

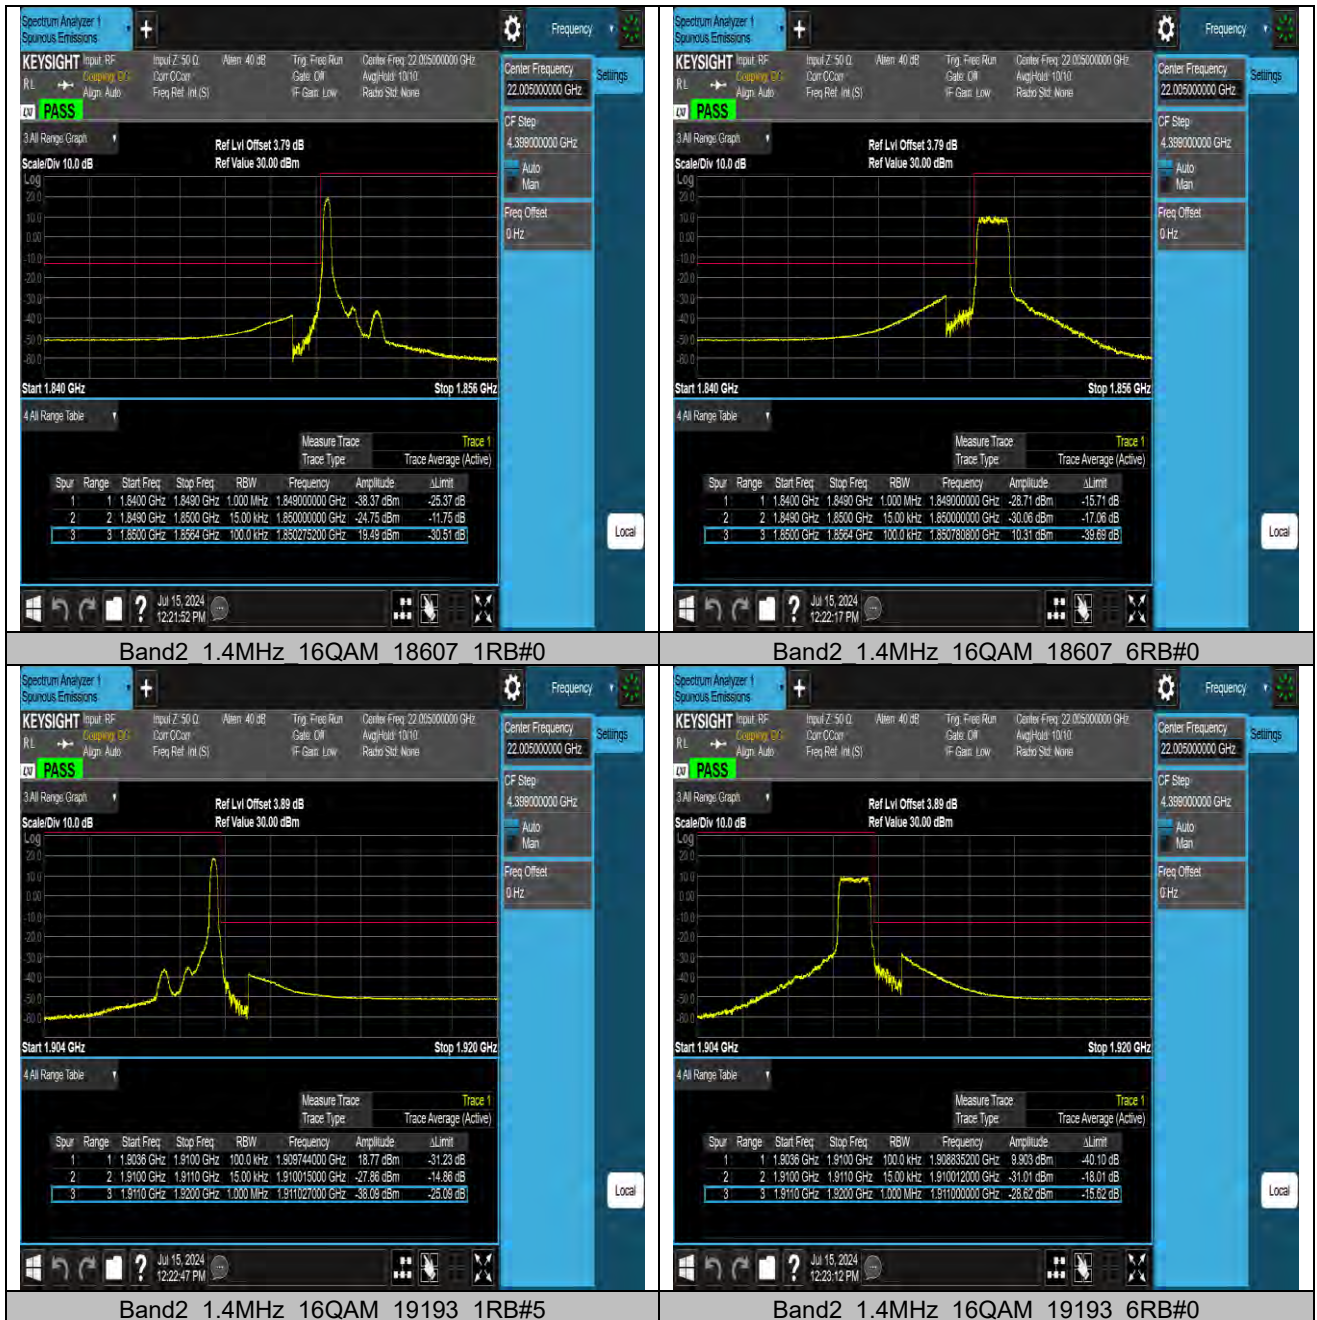



BUREAU
VERITAS


Test Report No.: W7L-240618W001RF06

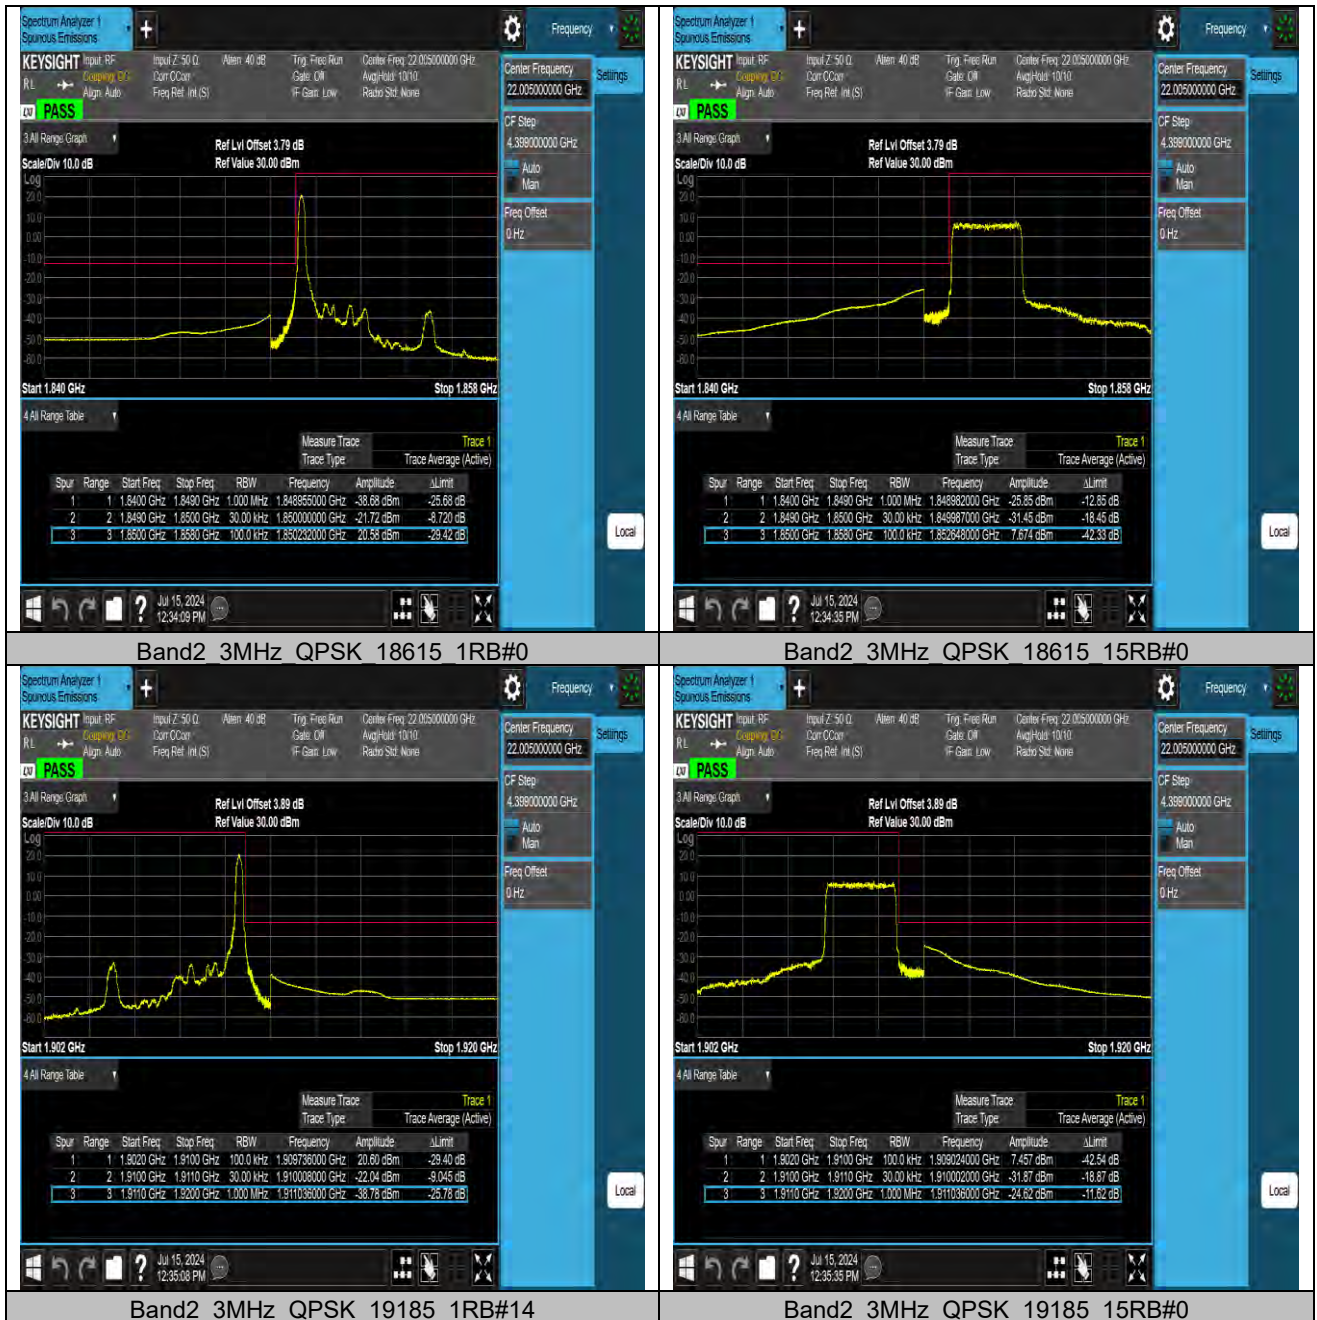



BUREAU
VERITAS


Test Report No.: W7L-240618W001RF06

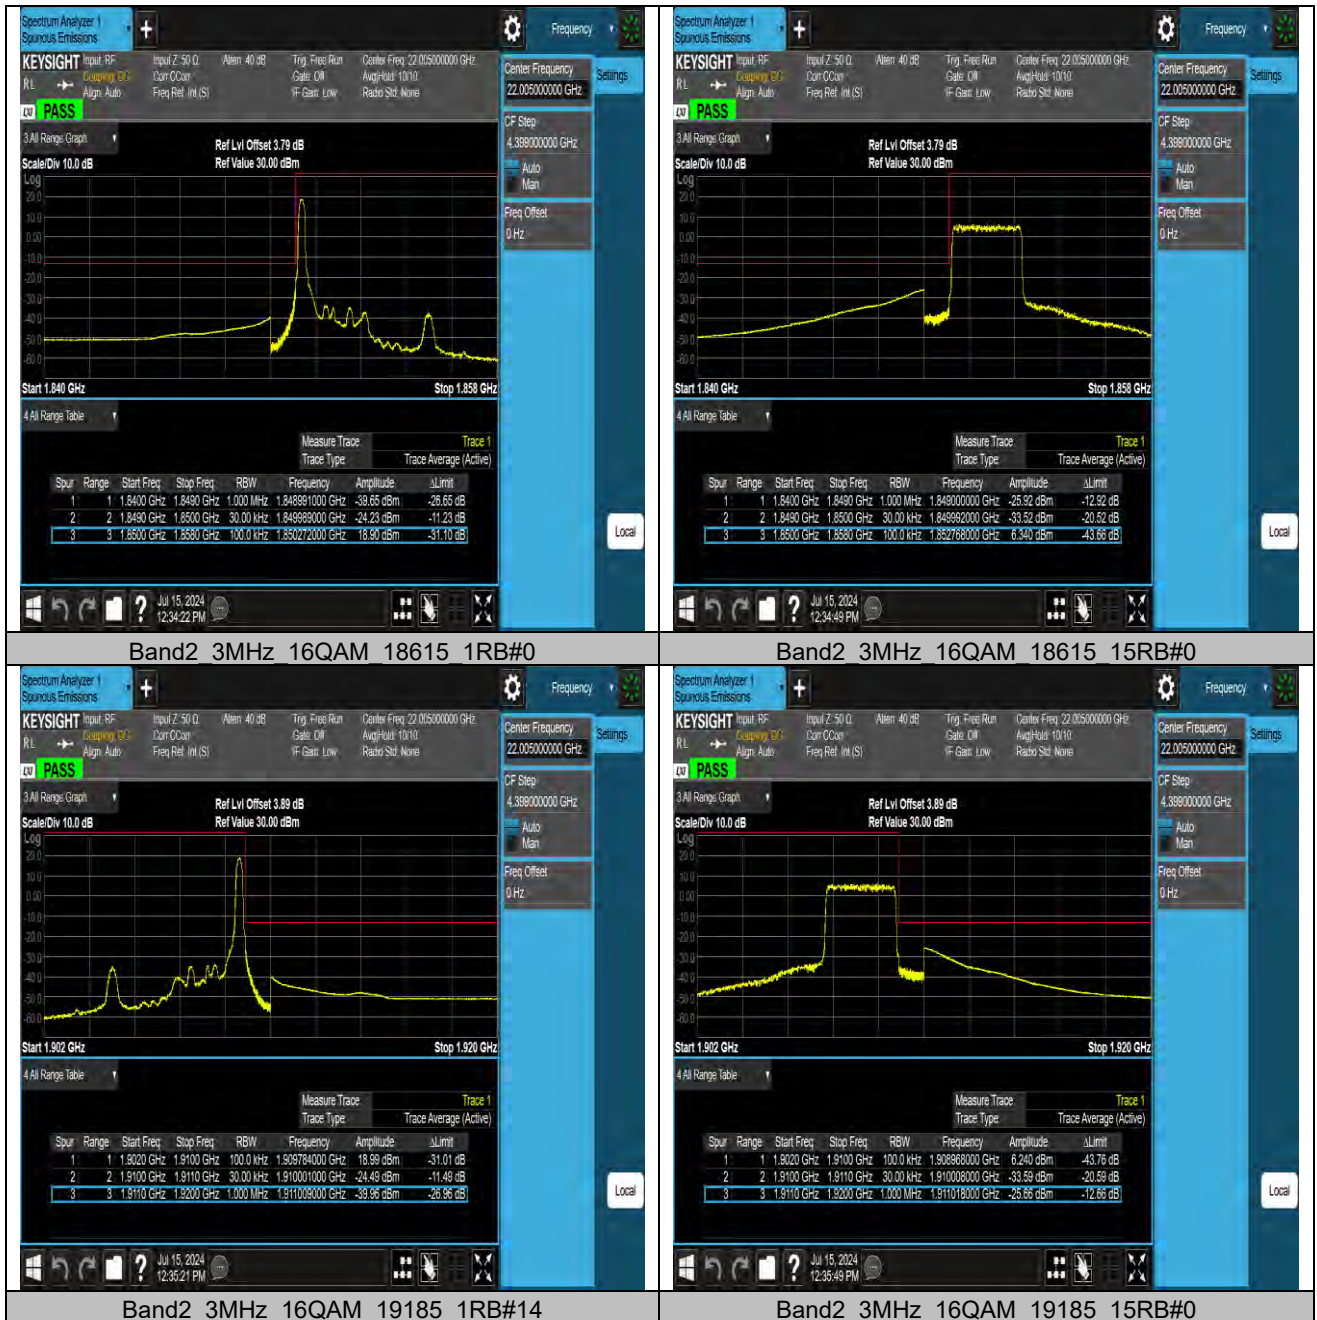



BUREAU
VERITAS


Test Report No.: W7L-240618W001RF06

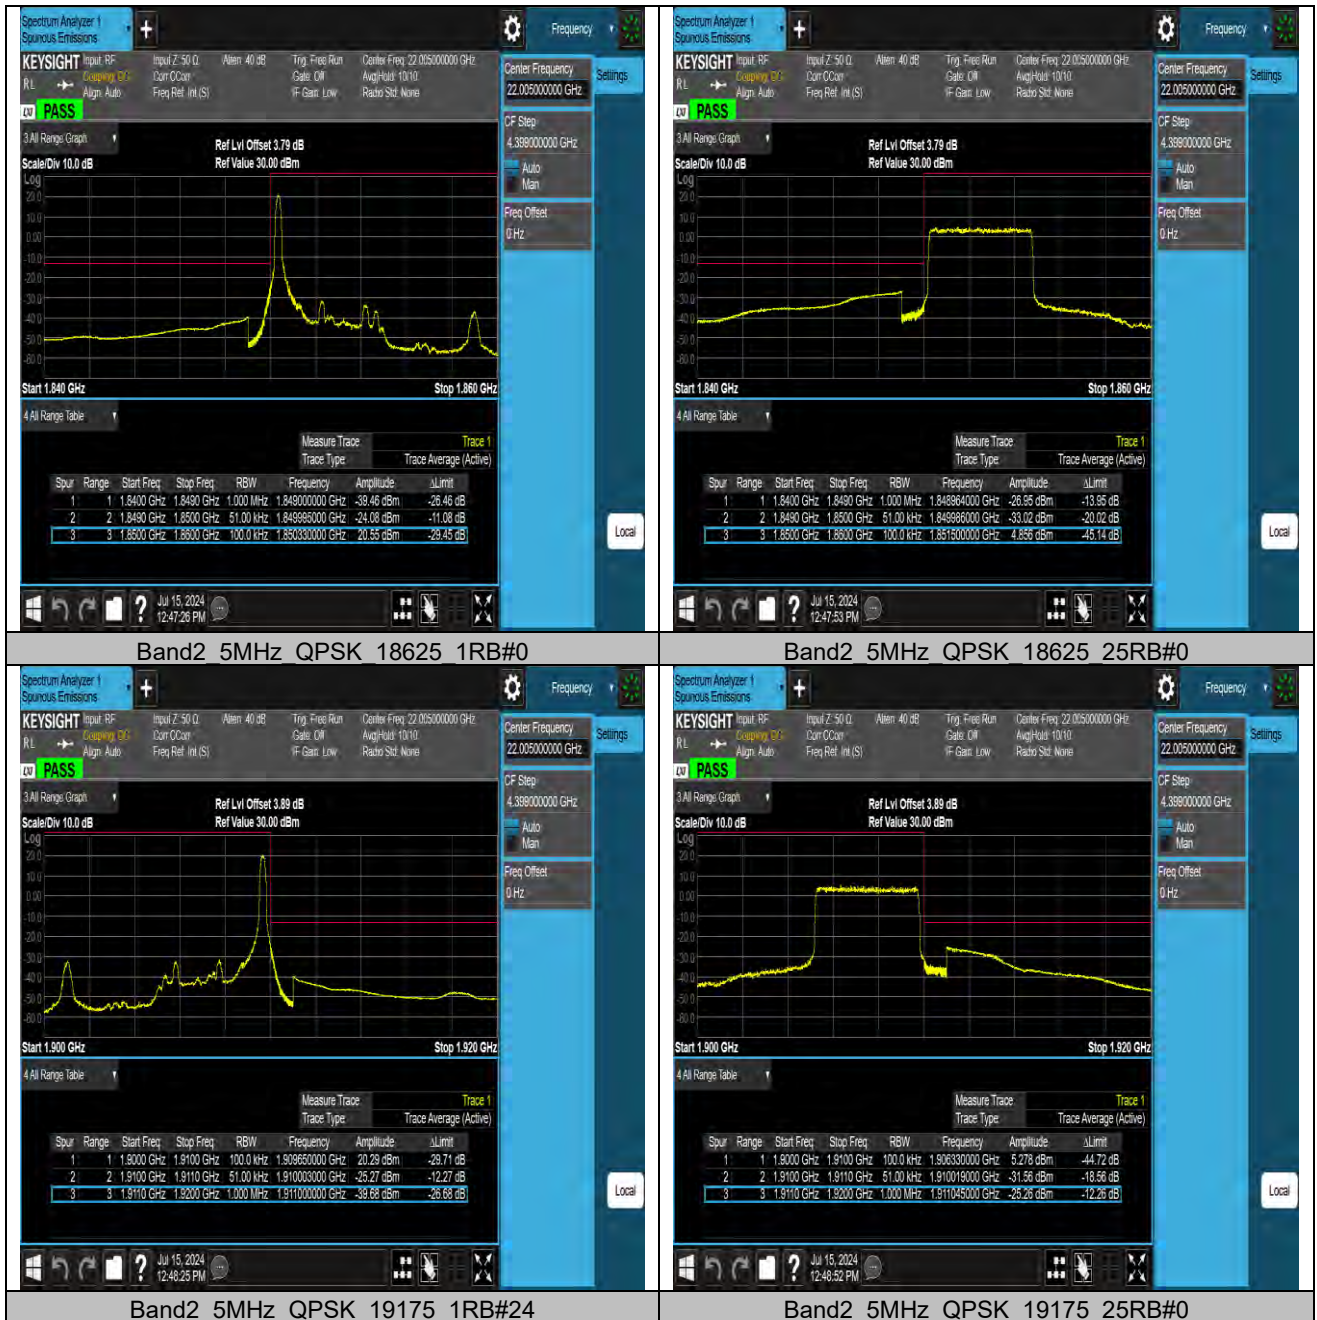



BUREAU
VERITAS

Test Report No.: W7L-240618W001RF06

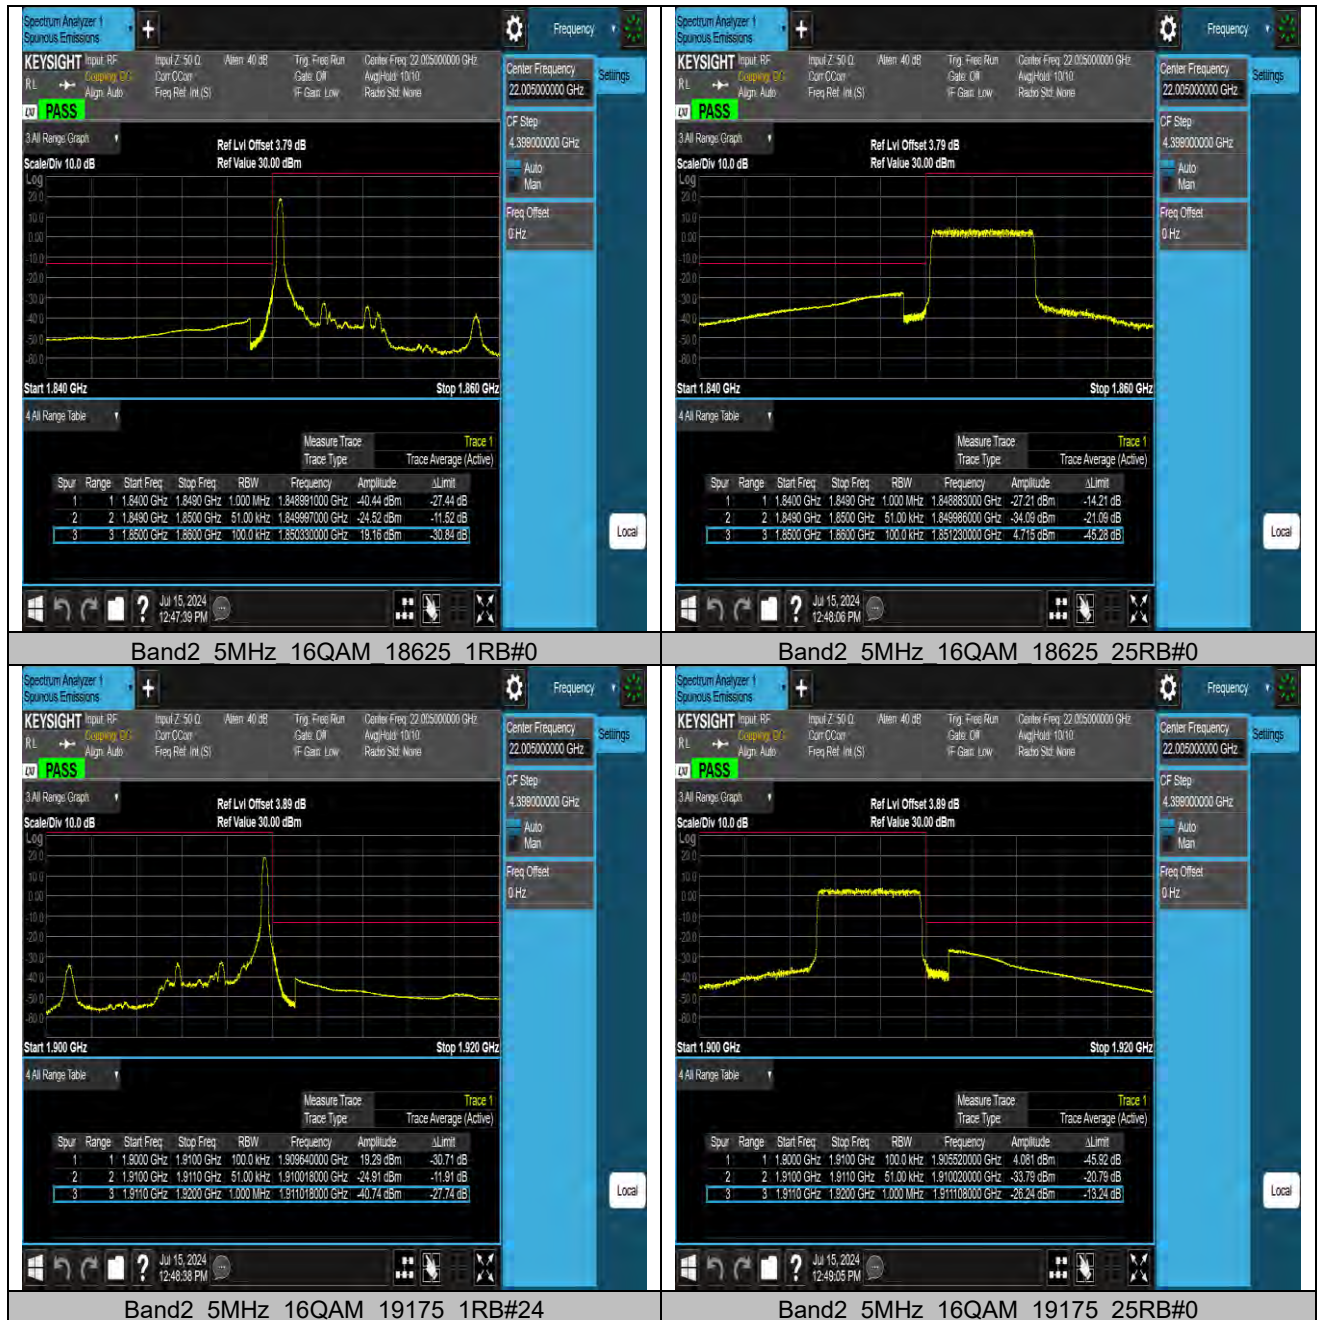

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd


Room B37, Warehouse A5, No.3 Chiwan 4th Road,
Zhaoshang Street, Nanshan District Shenzhen,
Guangdong, People's Republic of China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU
VERITAS


Test Report No.: W7L-240618W001RF06

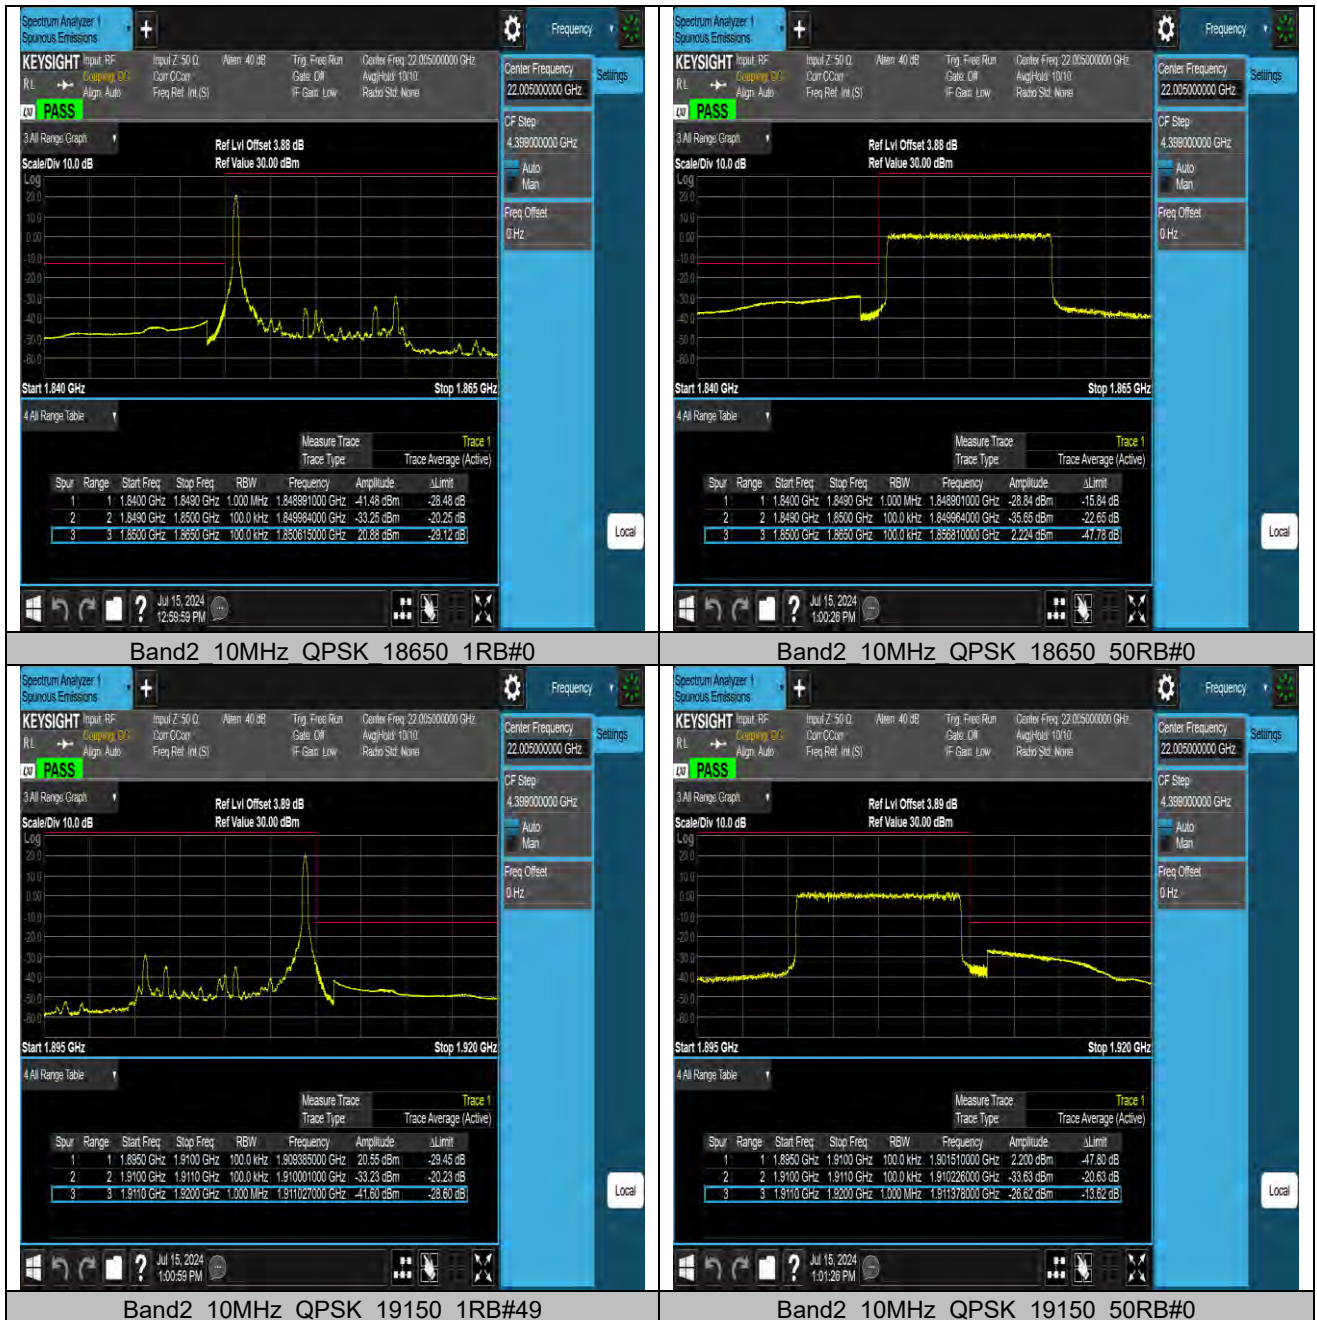



BUREAU
VERITAS

Test Report No.: W7L-240618W001RF06

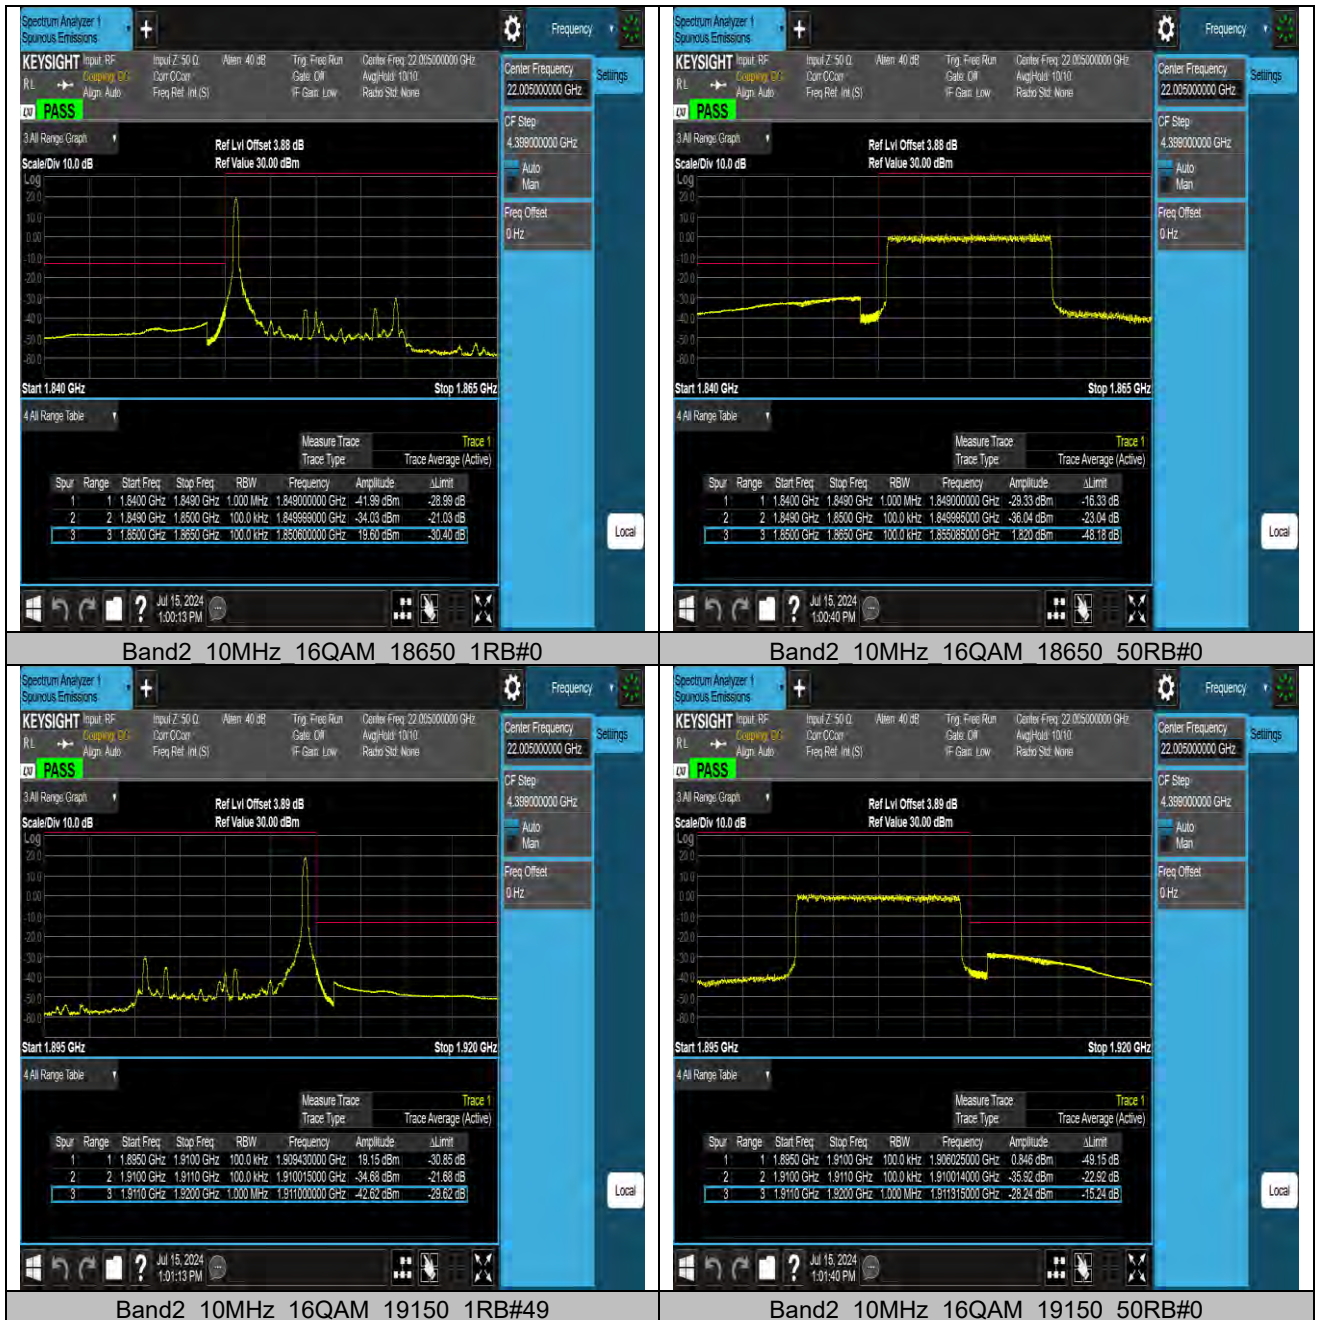



BUREAU
VERITAS

Test Report No.: W7L-240618W001RF06

