




802.11be(EHT80) LCH 6625MHz RU996 Left Ant1 NTN

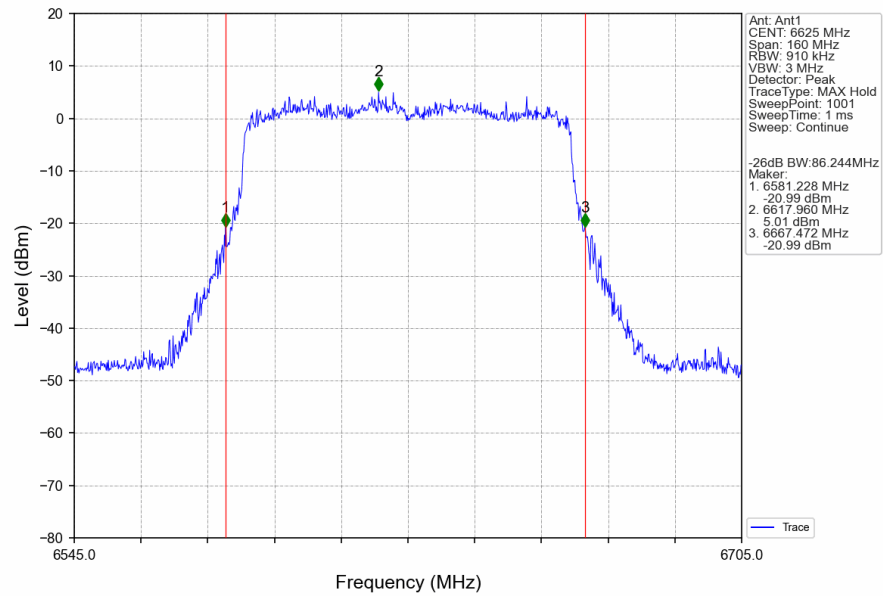


802.11be(EHT80) MCH 6705MHz RU996 Left Ant1 NTN

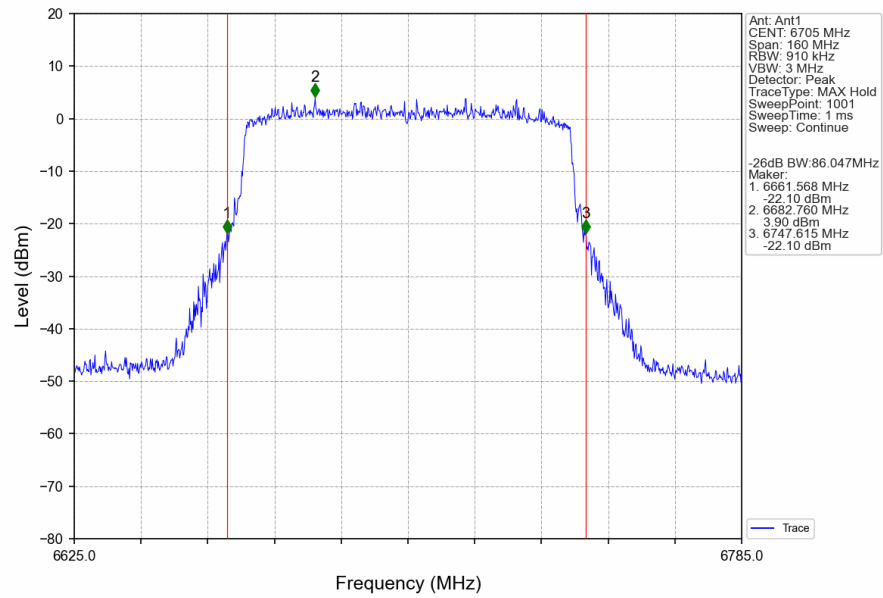

802.11be(EHT80) HCH 6785MHz RU996 Left Ant1 NTN

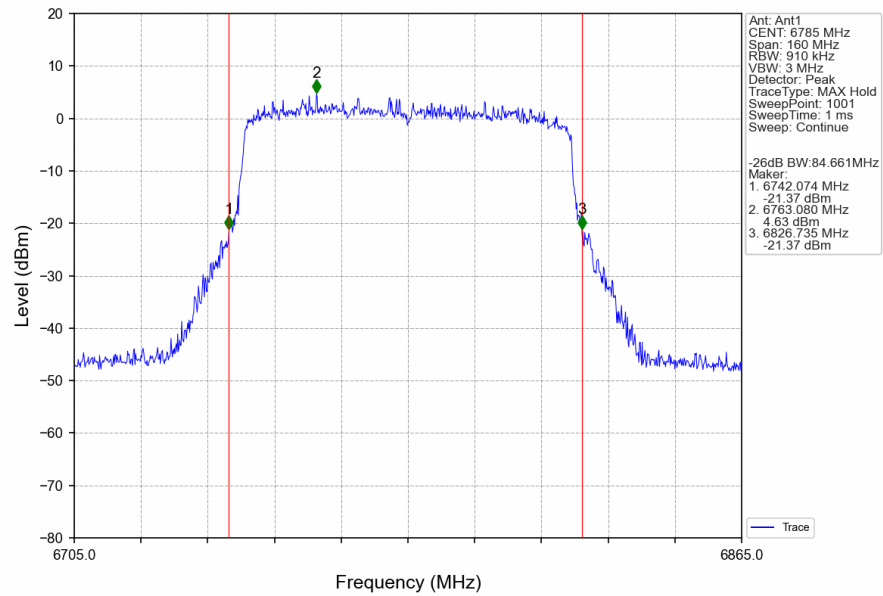

802.11be(EHT160)_MCH_6665MHz_2xRU996_Left_Ant1_NTN

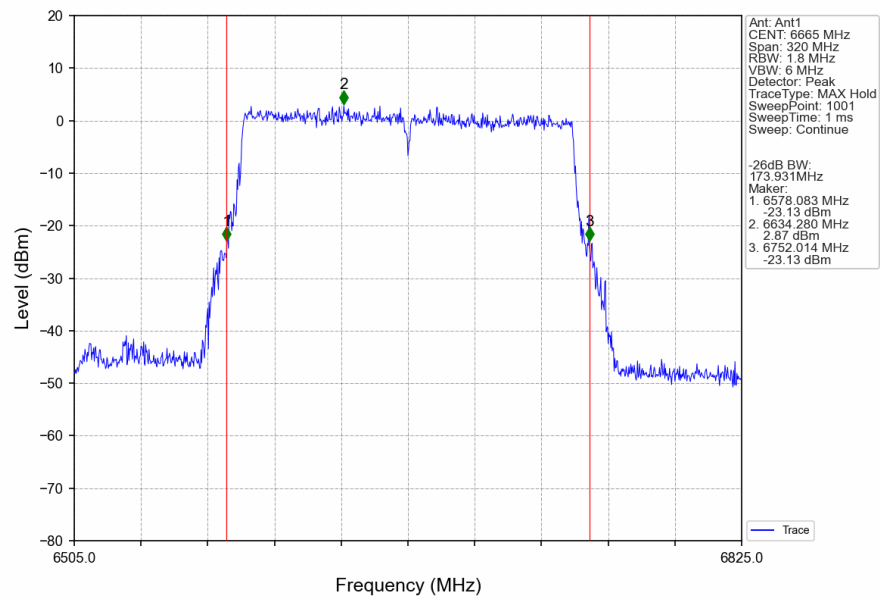

3. Maximum Conducted Output Power

3.1 Test Result

3.1.1 Power

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)				Verdict
						ANT1	ANT0	MIMO	Limit	
NTNV	802.11be (EHT20)	MIMO	5955	RU26	Left	2.75	3.27	6.03	/	Pass
				RU52	Left	4.9	4.72	7.82	/	Pass
				RU106	Left	8.29	8.59	11.45	/	Pass
				RU242	Left	10.94	12.49	14.79	/	Pass
				RU26+52	/	6.21	7.77	10.07	/	Pass
			6175	RU26	Mid	2.86	3.85	6.39	/	Pass
				RU52	Mid	4.73	5.77	8.29	/	Pass
				RU106	Left	8.16	8.79	11.50	/	Pass
				RU242	Left	10.71	12.46	14.68	/	Pass
				RU26+52	/	6.06	7.85	10.06	/	Pass
			6415	RU26	Right	2.22	3.22	5.76	/	Pass
				RU52	Right	6.07	5.85	8.97	/	Pass
				RU106	Right	9.07	9.62	12.36	/	Pass
				RU242	Left	11.20	12.85	15.12	/	Pass
				RU26+52	/	6.78	8.35	10.65	/	Pass
	802.11be (EHT40)	MIMO	5965	RU242	Left	7.83	8.43	11.15	/	Pass
				RU484	Left	11.13	12.72	15.01	/	Pass
				RU26+106	/	5.62	7.24	9.52	/	Pass
			6165	RU242	Left	6.56	8.57	10.69	/	Pass
				RU484	Left	11.08	12.89	15.09	/	Pass
				RU26+106	/	5.37	5.73	8.56	/	Pass
			6405	RU242	Right	8.73	9.36	12.07	/	Pass
				RU484	Left	11.24	12.55	14.95	/	Pass
				RU26+106	/	6.15	6.41	9.29	/	Pass
				RU26+106	/	6.15	6.41	9.29	/	Pass
	802.11be (EHT80)	MIMO	5985	RU484	Left	8.26	8.71	11.50	/	Pass
				RU996	Left	11.4	12.9	15.22	/	Pass
				RU242+484	/	9.6	9.9	12.76	/	Pass
			6145	RU484	Left	8.11	8.64	11.39	/	Pass
				RU996	Left	11.48	12.87	15.24	/	Pass
				RU242+484	/	9.25	9.95	12.62	/	Pass
			6385	RU484	Right	9.48	9.89	12.70	/	Pass
				RU996	Left	11.19	12.70	15.02	/	Pass
				RU242+484	/	9.84	10.66	13.28	/	Pass
				RU242+484	/	9.84	10.66	13.28	/	Pass
	802.11be (EHT160)	MIMO	6025	RU996	Left	8.49	8.78	11.65	/	Pass
				2xRU996	Left	10.82	11.73	14.31	/	Pass
				RU484+996	/	9.71	9.94	12.84	/	Pass
			6185	RU996	Left	8.05	8.95	11.53	/	Pass
				2xRU996	Left	11	12.57	14.87	/	Pass
				RU484+996	/	9.26	10.31	12.83	/	Pass
			6345	RU996	Right	8.63	9.55	12.12	/	Pass
				2xRU996	Left	10.45	12.44	14.57	/	Pass
				RU484+996	/	9.09	10.34	12.77	/	Pass
				RU484+996	/	9.09	10.34	12.77	/	Pass
	802.11be (EHT320)	MIMO	6105	4xRU996	Left	10.89	12.80	14.96	/	Pass
				RU484+2X996	/	8.75	10.12	12.50	/	Pass
				P-40M-RU2X996+996+484	/	9.47	11.97	13.91	/	Pass
			6265	4xRU996	Left	11.19	12.76	15.06	/	Pass

				RU484+2X996	/	8.63	10.38	12.60	/	Pass
				P-40M-RU2X996+996+484	/	10.7	12.35	14.61	/	Pass

3.1.2 EIRP

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)		Gain (dBi)		E.I.R.P (dBm)				Verdict
						ANT1	ANT0	ANT1	ANT0	ANT1	ANT0	MIMO	Limit	
NTNV	802.11be (EHT20)	MIMO	5955	RU26	Left	2.75	3.27	1.4	0.75	4.15	4.02	7.10	<=30	Pass
				RU52	Left	4.9	4.72	1.4	0.75	6.30	5.47	8.92	<=30	Pass
				RU106	Left	8.29	8.59	1.4	0.75	9.69	9.34	12.53	<=30	Pass
				RU242	Left	10.94	12.49	1.4	0.75	12.34	13.24	15.82	<=30	Pass
				RU26+52	/	6.21	7.77	1.4	0.75	7.61	8.52	11.10	<=30	Pass
			6175	RU26	Mid	2.86	3.85	1.4	0.75	4.26	4.60	7.44	<=30	Pass
				RU52	Mid	4.73	5.77	1.4	0.75	6.13	6.52	9.34	<=30	Pass
				RU106	Left	8.16	8.79	1.4	0.75	9.56	9.54	12.56	<=30	Pass
				RU242	Left	10.71	12.46	1.4	0.75	12.11	13.21	15.70	<=30	Pass
				RU26+52	/	6.06	7.85	1.4	0.75	7.46	8.60	11.08	<=30	Pass
			6415	RU26	Right	2.22	3.22	1.4	0.75	3.62	3.97	6.81	<=30	Pass
				RU52	Right	6.07	5.85	1.4	0.75	7.47	6.60	10.07	<=30	Pass
				RU106	Right	9.07	9.62	1.4	0.75	10.47	10.37	13.43	<=30	Pass
				RU242	Left	11.20	12.85	1.4	0.75	12.60	13.60	16.14	<=30	Pass
				RU26+52	/	6.78	8.35	1.4	0.75	8.18	9.10	11.67	<=30	Pass
	802.11be (EHT40)	MIMO	5965	RU242	Left	7.83	8.43	1.4	0.75	9.23	9.18	12.22	<=30	Pass
				RU484	Left	11.13	12.72	1.4	0.75	12.53	13.47	16.04	<=30	Pass
				RU26+106	/	5.62	7.24	1.4	0.75	7.02	7.99	10.54	<=30	Pass
			6165	RU242	Left	6.56	8.57	1.4	0.75	7.96	9.32	11.70	<=30	Pass
				RU484	Left	11.08	12.89	1.4	0.75	12.48	13.64	16.11	<=30	Pass
				RU26+106	/	5.37	5.73	1.4	0.75	6.77	6.48	9.64	<=30	Pass
			6405	RU242	Right	8.73	9.36	1.4	0.75	10.13	10.11	13.13	<=30	Pass
				RU484	Left	11.24	12.55	1.4	0.75	12.64	13.30	15.99	<=30	Pass
				RU26+106	/	6.15	6.41	1.4	0.75	7.55	7.16	10.37	<=30	Pass
				RU484	Left	8.26	8.71	1.4	0.75	9.66	9.46	12.57	<=30	Pass
	802.11be (EHT80)	MIMO	5985	RU996	Left	11.4	12.9	1.4	0.75	12.80	13.65	16.26	<=30	Pass
				RU242+484	/	9.6	9.9	1.4	0.75	11.00	10.65	13.84	<=30	Pass
				RU484	Left	8.11	8.64	1.4	0.75	9.51	9.39	12.46	<=30	Pass
			6145	RU996	Left	11.48	12.87	1.4	0.75	12.88	13.62	16.28	<=30	Pass
				RU242+484	/	9.25	9.95	1.4	0.75	10.65	10.70	13.69	<=30	Pass
				RU484	Right	9.48	9.89	1.4	0.75	10.88	10.64	13.77	<=30	Pass
			6385	RU996	Left	11.19	12.70	1.4	0.75	12.59	13.45	16.05	<=30	Pass
				RU242+484	/	9.84	10.66	1.4	0.75	11.24	11.41	14.34	<=30	Pass
				RU996	Left	8.49	8.78	1.4	0.75	9.89	9.53	12.72	<=30	Pass
				2xRU996	Left	10.82	11.73	1.4	0.75	12.22	12.48	15.37	<=30	Pass
	802.11be (EHT160)	MIMO	6025	RU484+996	/	9.71	9.94	1.4	0.75	11.11	10.69	13.92	<=30	Pass
				RU996	Left	8.05	8.95	1.4	0.75	9.45	9.70	12.59	<=30	Pass
				2xRU996	Left	11	12.57	1.4	0.75	12.40	13.32	15.89	<=30	Pass
			6185	RU484+996	/	9.26	10.31	1.4	0.75	10.66	11.06	13.87	<=30	Pass
				RU996	Right	8.63	9.55	1.4	0.75	10.03	10.30	13.18	<=30	Pass
				2xRU996	Left	10.45	12.44	1.4	0.75	11.85	13.19	15.58	<=30	Pass
			6345	RU484+996	/	9.09	10.34	1.4	0.75	10.49	11.09	13.81	<=30	Pass
				4xRU996	Left	10.89	12.80	1.4	0.75	12.29	13.55	15.97	<=30	Pass
				RU484+2X996	/	8.75	10.12	1.4	0.75	10.15	10.87	13.54	<=30	Pass
				P-40M-RU2X996+996+484	/	9.47	11.97	1.4	0.75	10.87	12.72	14.90	<=30	Pass

			6265	4xRU996	Left	11.19	12.76	1.4	0.75	12.59	13.51	16.09	<=30	Pass
				RU484+2X996	/	8.63	10.38	1.4	0.75	10.03	11.13	13.63	<=30	Pass
				P-40M- RU2X996+996+484	/	10.7	12.35	1.4	0.75	12.10	13.10	15.64	<=30	Pass

3.1.3 Power

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)				Verdict
						ANT1	ANT0	MIMO	Limit	
NTNV	802.11be (EHT20)	MIMO	6535	RU26	Left	3.54	3.18	6.37	/	Pass
				RU52	Left	6.47	6.26	9.38	/	Pass
				RU106	Left	7.76	9.4	11.67	/	Pass
				RU242	Left	10.79	12.97	15.03	/	Pass
				RU26+52	/	7.2	9.09	11.26	/	Pass
			6695	RU26	Mid	4	3.93	6.98	/	Pass
				RU52	Mid	6.27	5.59	8.95	/	Pass
				RU106	Left	10.02	9.56	12.81	/	Pass
				RU242	Left	11.19	12.18	14.72	/	Pass
				RU26+52	/	7.54	8	10.79	/	Pass
			6855	RU26	Right	3.69	2.95	6.35	/	Pass
				RU52	Right	5.9	5.07	8.52	/	Pass
				RU106	Right	9.37	8.38	11.91	/	Pass
				RU242	Left	11.08	11.75	14.44	/	Pass
				RU26+52	/	8.42	7.33	10.92	/	Pass
	802.11be (EHT40)	MIMO	6565	RU242	Left	8.73	9.12	11.94	/	Pass
				RU484	Left	11.12	12.28	14.75	/	Pass
				RU26+106	/	5.69	7.4	9.64	/	Pass
			6685	RU242	Left	8.57	8.82	11.71	/	Pass
				RU484	Left	10.72	12.40	14.65	/	Pass
				RU26+106	/	5.67	7.42	9.64	/	Pass
			6845	RU242	Right	8.81	7.94	11.41	/	Pass
				RU484	Left	11.05	11.42	14.25	/	Pass
				RU26+106	/	6.39	5.12	8.81	/	Pass
	802.11be (EHT80)	MIMO	6625	RU484	Left	8.8	9.43	12.14	/	Pass
				RU996	Left	11.21	11.91	14.58	/	Pass
				RU242+484	/	9.41	10.01	12.73	/	Pass
			6705	RU484	Left	8.53	8.93	11.74	/	Pass
				RU996	Left	11.03	12.47	14.82	/	Pass
				RU242+484	/	9.51	9.9	12.72	/	Pass
			6785	RU484	Right	8.52	9.11	11.84	/	Pass
				RU996	Left	11.06	12.25	14.70	/	Pass
				RU242+484	/	9.75	10.2	12.99	/	Pass
	802.11be (EHT160)	MIMO	6665	RU996	Left	9.07	9.33	12.21	/	Pass
				2xRU996	Left	10.95	12.23	14.65	/	Pass
				RU484+996	/	9.68	10.11	12.91	/	Pass

3.1.4 EIRP

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)	Gain (dBi)		E.I.R.P (dBm)				Verdict
						ANT1	ANT0	ANT1	ANT0	ANT1	ANT0	MIMO	Limit

NTNV	802.11be (EHT20)	MIMO	6535	RU26	Left	3.54	3.18	0.9	0.92	4.44	4.10	7.28	<=30	Pass
				RU52	Left	6.47	6.26	0.9	0.92	7.37	7.18	10.29	<=30	Pass
				RU106	Left	7.76	9.4	0.9	0.92	8.66	10.32	12.58	<=30	Pass
				RU242	Left	10.79	12.97	0.9	0.92	11.69	13.89	15.94	<=30	Pass
				RU26+52	/	7.2	9.09	0.9	0.92	8.10	10.01	12.17	<=30	Pass
			6695	RU26	Mid	4	3.93	0.9	0.92	4.90	4.85	7.89	<=30	Pass
				RU52	Mid	6.27	5.59	0.9	0.92	7.17	6.51	9.86	<=30	Pass
				RU106	Left	10.02	9.56	0.9	0.92	10.92	10.48	13.72	<=30	Pass
				RU242	Left	11.19	12.18	0.9	0.92	12.09	13.10	15.63	<=30	Pass
				RU26+52	/	7.54	8	0.9	0.92	8.44	8.92	11.70	<=30	Pass
			6855	RU26	Right	3.69	2.95	0.9	0.92	4.59	3.87	7.26	<=30	Pass
				RU52	Right	5.9	5.07	0.9	0.92	6.80	5.99	9.42	<=30	Pass
				RU106	Right	9.37	8.38	0.9	0.92	10.27	9.30	12.82	<=30	Pass
				RU242	Left	11.08	11.75	0.9	0.92	11.98	12.67	15.35	<=30	Pass
				RU26+52	/	8.42	7.33	0.9	0.92	9.32	8.25	11.83	<=30	Pass
	802.11be (EHT40)	MIMO	6565	RU242	Left	8.73	9.12	0.9	0.92	9.63	10.04	12.85	<=30	Pass
				RU484	Left	11.12	12.28	0.9	0.92	12.02	13.20	15.66	<=30	Pass
				RU26+106	/	5.69	7.4	0.9	0.92	6.59	8.32	10.55	<=30	Pass
			6685	RU242	Left	8.57	8.82	0.9	0.92	9.47	9.74	12.62	<=30	Pass
				RU484	Left	10.72	12.40	0.9	0.92	11.62	13.32	15.57	<=30	Pass
				RU26+106	/	5.67	7.42	0.9	0.92	6.57	8.34	10.55	<=30	Pass
			6845	RU242	Right	8.81	7.94	0.9	0.92	9.71	8.86	12.32	<=30	Pass
				RU484	Left	11.05	11.42	0.9	0.92	11.95	12.34	15.16	<=30	Pass
				RU26+106	/	6.39	5.12	0.9	0.92	7.29	6.04	9.72	<=30	Pass
	802.11be (EHT80)	MIMO	6625	RU484	Left	8.8	9.43	0.9	0.92	9.70	10.35	13.05	<=30	Pass
				RU996	Left	11.21	11.91	0.9	0.92	12.11	12.83	15.49	<=30	Pass
				RU242+484	/	9.41	10.01	0.9	0.92	10.31	10.93	13.64	<=30	Pass
			6705	RU484	Left	8.53	8.93	0.9	0.92	9.43	9.85	12.66	<=30	Pass
				RU996	Left	11.03	12.47	0.9	0.92	11.93	13.39	15.74	<=30	Pass
				RU242+484	/	9.51	9.9	0.9	0.92	10.41	10.82	13.63	<=30	Pass
			6785	RU484	Right	8.52	9.11	0.9	0.92	9.42	10.03	12.75	<=30	Pass
				RU996	Left	11.06	12.25	0.9	0.92	11.96	13.17	15.62	<=30	Pass
				RU242+484	/	9.75	10.2	0.9	0.92	10.65	11.12	13.90	<=30	Pass
	802.11be (EHT160)	MIMO	6665	RU996	Left	9.07	9.33	0.9	0.92	9.97	10.25	13.12	<=30	Pass
				2xRU996	Left	10.95	12.23	0.9	0.92	11.85	13.15	15.56	<=30	Pass
				RU484+996	/	9.68	10.11	0.9	0.92	10.58	11.03	13.82	<=30	Pass

4. Maximum Power Spectral Density

4.1 Test Result

4.1.1 PSD

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum PSD (dBm/MHz)				Verdict
						ANT1	ANT0	MIMO	Limit	
NTNV	802.11be (EHT20)	MIMO	5955	RU26	Left	-0.26	0.27	2.88	/	Pass
				RU52	Left	-0.20	0.41	2.99	/	Pass
				RU106	Left	-0.01	0.60	3.06	/	Pass
				RU242	Left	0.50	1.96	3.87	/	Pass
				RU26+52	/	-0.96	0.81	2.99	/	Pass
			6175	RU26	Mid	-0.86	0.52	2.79	/	Pass
				RU52	Mid	-0.83	0.34	2.71	/	Pass
				RU106	Left	-0.10	0.61	3.10	/	Pass
				RU242	Left	0.09	2.01	4.07	/	Pass
				RU26+52	/	-1.05	1.03	3.11	/	Pass
			6415	RU26	Right	0.00	1.18	3.58	/	Pass
				RU52	Right	1.14	0.88	3.83	/	Pass
				RU106	Right	1.18	1.63	4.24	/	Pass
				RU242	Left	1.33	2.68	4.53	/	Pass
				RU26+52	/	-0.28	1.54	3.61	/	Pass
	802.11be (EHT40)	MIMO	5965	RU242	Left	-2.75	-2.71	0.07	/	Pass
				RU484	Left	-3.05	-1.15	0.72	/	Pass
				RU26+106	/	-3.68	-2.24	-0.05	/	Pass
			6165	RU242	Left	-4.54	-2.58	-0.59	/	Pass
				RU484	Left	-3.10	-1.64	0.43	/	Pass
				RU26+106	/	-3.80	-3.82	-0.82	/	Pass
			6405	RU242	Right	-2.21	-1.76	0.78	/	Pass
				RU484	Left	-1.80	-0.92	1.30	/	Pass
				RU26+106	/	-2.47	-1.70	0.74	/	Pass
	802.11be (EHT80)	MIMO	5985	RU484	Left	-5.76	-5.89	-2.93	/	Pass
				RU996	Left	-5.82	-4.66	-2.42	/	Pass
				RU242+484	/	-6.39	-6.18	-3.59	/	Pass
			6145	RU484	Left	-6.25	-5.78	-3.32	/	Pass
				RU996	Left	-5.93	-4.64	-2.42	/	Pass
				RU242+484	/	-7.10	-6.04	-3.82	/	Pass
			6385	RU484	Right	-4.77	-4.91	-2.01	/	Pass
				RU996	Left	-5.09	-3.69	-1.53	/	Pass
				RU242+484	/	-6.27	-5.58	-3.06	/	Pass
	802.11be (EHT160)	MIMO	6025	RU996	Left	-9.26	-8.94	-6.43	/	Pass
				2xRU996	Left	-9.07	-7.99	-5.93	/	Pass
				RU484+996	/	-9.41	-9.47	-6.78	/	Pass
			6185	RU996	Left	-9.41	-8.77	-6.33	/	Pass
				2xRU996	Left	-9.62	-7.89	-6.02	/	Pass
				RU484+996	/	-9.88	-9.14	-6.71	/	Pass
			6345	RU996	Right	-8.28	-7.86	-5.38	/	Pass
				2xRU996	Left	-8.29	-7.01	-4.82	/	Pass
	802.11be (EHT320)	MIMO	6105	RU484+996	/	-9.56	-8.65	-6.29	/	Pass
				4xRU996	Left	-11.71	-10.13	-8.17	/	Pass
				RU484+2X996	/	-12.67	-11.30	-9.26	/	Pass
			6265	P-40M-RU2X996+996+484	/	-12.34	-10.83	-9.01	/	Pass
				4xRU996	Left	-10.35	-9.41	-7.11	/	Pass
				RU484+2X996	/	-12.14	-10.83	-8.80	/	Pass

				P-40M-RU2X996+996+484	/	-11.02	-10.19	-8.39	/	Pass
--	--	--	--	-----------------------	---	--------	--------	-------	---	------

4.1.2 E.I.R.PSD

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum PSD (dBm/MHz)		Gain (dBi)		Maximum E.I.R.PSD (dBm/MHz)				Verdict
						ANT1	ANT0	ANT1	ANT0	ANT1	ANT0	MIMO	Limit	
NTNV	802.11be (EHT20)	MIMO	5955	RU26	Left	-0.26	0.27	1.4	0.75	1.14	1.02	4.09	<=17	Pass
				RU52	Left	-0.20	0.41	1.4	0.75	1.20	1.16	4.19	<=17	Pass
				RU106	Left	-0.01	0.60	1.4	0.75	1.39	1.35	4.38	<=17	Pass
				RU242	Left	0.50	1.96	1.4	0.75	1.90	2.71	5.33	<=17	Pass
				RU26+52	/	-0.96	0.81	1.4	0.75	0.44	1.56	4.05	<=17	Pass
			6175	RU26	Mid	-0.86	0.52	1.4	0.75	0.54	1.27	3.93	<=17	Pass
				RU52	Mid	-0.83	0.34	1.4	0.75	0.57	1.09	3.85	<=17	Pass
				RU106	Left	-0.10	0.61	1.4	0.75	1.30	1.36	4.34	<=17	Pass
				RU242	Left	0.09	2.01	1.4	0.75	1.49	2.76	5.18	<=17	Pass
				RU26+52	/	-1.05	1.03	1.4	0.75	0.35	1.78	4.13	<=17	Pass
			6415	RU26	Right	0.00	1.18	1.4	0.75	1.40	1.93	4.68	<=17	Pass
				RU52	Right	1.14	0.88	1.4	0.75	2.54	1.63	5.12	<=17	Pass
				RU106	Right	1.18	1.63	1.4	0.75	2.58	2.38	5.49	<=17	Pass
				RU242	Left	1.33	2.68	1.4	0.75	2.73	3.43	6.10	<=17	Pass
				RU26+52	/	-0.28	1.54	1.4	0.75	1.12	2.29	4.75	<=17	Pass
	802.11be (EHT40)	MIMO	5965	RU242	Left	-2.75	-2.71	1.4	0.75	-1.35	-1.96	1.37	<=17	Pass
				RU484	Left	-3.05	-1.15	1.4	0.75	-1.65	-0.40	2.03	<=17	Pass
				RU26+106	/	-3.68	-2.24	1.4	0.75	-2.28	-1.49	1.14	<=17	Pass
			6165	RU242	Left	-4.54	-2.58	1.4	0.75	-3.14	-1.83	0.57	<=17	Pass
				RU484	Left	-3.10	-1.64	1.4	0.75	-1.70	-0.89	1.73	<=17	Pass
				RU26+106	/	-3.80	-3.82	1.4	0.75	-2.40	-3.07	0.29	<=17	Pass
			6405	RU242	Right	-2.21	-1.76	1.4	0.75	-0.81	-1.01	2.10	<=17	Pass
				RU484	Left	-1.80	-0.92	1.4	0.75	-0.40	-0.17	2.73	<=17	Pass
				RU26+106	/	-2.47	-1.70	1.4	0.75	-1.07	-0.95	2.00	<=17	Pass
	802.11be (EHT80)	MIMO	5985	RU484	Left	-5.76	-5.89	1.4	0.75	-4.36	-5.14	-1.72	<=17	Pass
				RU996	Left	-5.82	-4.66	1.4	0.75	-4.42	-3.91	-1.15	<=17	Pass
				RU242+484	/	-6.39	-6.18	1.4	0.75	-4.99	-5.43	-2.19	<=17	Pass
			6145	RU484	Left	-6.25	-5.78	1.4	0.75	-4.85	-5.03	-1.93	<=17	Pass
				RU996	Left	-5.93	-4.64	1.4	0.75	-4.53	-3.89	-1.19	<=17	Pass
				RU242+484	/	-7.10	-6.04	1.4	0.75	-5.70	-5.29	-2.48	<=17	Pass
			6385	RU484	Right	-4.77	-4.91	1.4	0.75	-3.37	-4.16	-0.74	<=17	Pass
				RU996	Left	-5.09	-3.69	1.4	0.75	-3.69	-2.94	-0.29	<=17	Pass
				RU242+484	/	-6.27	-5.58	1.4	0.75	-4.87	-4.83	-1.84	<=17	Pass
	802.11be (EHT160)	MIMO	6025	RU996	Left	-9.26	-8.94	1.4	0.75	-7.86	-8.19	-5.01	<=17	Pass
				2xRU996	Left	-9.07	-7.99	1.4	0.75	-7.67	-7.24	-4.44	<=17	Pass
				RU484+996	/	-9.41	-9.47	1.4	0.75	-8.01	-8.72	-5.34	<=17	Pass
			6185	RU996	Left	-9.41	-8.77	1.4	0.75	-8.01	-8.02	-5.00	<=17	Pass
				2xRU996	Left	-9.62	-7.89	1.4	0.75	-8.22	-7.14	-4.64	<=17	Pass
				RU484+996	/	-9.88	-9.14	1.4	0.75	-8.48	-8.39	-5.42	<=17	Pass
			6345	RU996	Right	-8.28	-7.86	1.4	0.75	-6.88	-7.11	-3.98	<=17	Pass
				2xRU996	Left	-8.29	-7.01	1.4	0.75	-6.89	-6.26	-3.55	<=17	Pass
				RU484+996	/	-9.56	-8.65	1.4	0.75	-8.16	-7.90	-5.02	<=17	Pass
	802.11be (EHT320)	MIMO	6105	4xRU996	Left	-11.71	-10.13	1.4	0.75	-10.31	-9.38	-6.81	<=17	Pass
				RU484+2X996	/	-12.67	-11.30	1.4	0.75	-11.27	-10.55	-7.88	<=17	Pass
				P-40M-RU2X996+996+484	/	-12.34	-10.83	1.4	0.75	-10.94	-10.08	-7.48	<=17	Pass
			6265	4xRU996	Left	-10.35	-9.41	1.4	0.75	-8.95	-8.66	-5.79	<=17	Pass

				RU484+2X996	/	-12.14	-10.83	1.4	0.75	-10.74	-10.08	-7.39	<=17	Pass
				P-40M-RU2X996+996+484	/	-11.02	-10.19	1.4	0.75	-9.62	-9.44	-6.52	<=17	Pass

4.1.3 PSD

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum PSD (dBm/MHz)				Verdict
						ANT1	ANT0	MIMO	Limit	
NTNV	802.11be (EHT20)	MIMO	6535	RU26	Left	1.07	1.16	3.95	/	Pass
				RU52	Left	0.67	1.00	3.63	/	Pass
				RU106	Left	-0.14	1.20	3.34	/	Pass
				RU242	Left	1.18	2.47	4.61	/	Pass
				RU26+52	/	-0.25	1.66	3.78	/	Pass
			6695	RU26	Mid	0.96	0.90	3.62	/	Pass
				RU52	Mid	0.89	0.89	3.66	/	Pass
				RU106	Left	1.87	1.39	4.33	/	Pass
				RU242	Left	1.69	2.28	4.93	/	Pass
				RU26+52	/	1.04	1.14	3.84	/	Pass
			6855	RU26	Right	1.15	0.98	3.83	/	Pass
				RU52	Right	0.94	0.54	3.47	/	Pass
				RU106	Right	1.33	0.37	3.61	/	Pass
				RU242	Left	1.27	1.21	4.13	/	Pass
				RU26+52	/	1.30	0.57	3.74	/	Pass
	802.11be (EHT40)	MIMO	6565	RU242	Left	-2.97	-1.94	0.25	/	Pass
				RU484	Left	-2.28	-1.76	0.58	/	Pass
				RU26+106	/	-3.21	-1.97	0.11	/	Pass
			6685	RU242	Left	-2.64	-2.50	0.12	/	Pass
				RU484	Left	-2.18	-1.30	1.09	/	Pass
				RU26+106	/	-3.31	-1.86	0.35	/	Pass
			6845	RU242	Right	-2.05	-3.10	0.17	/	Pass
				RU484	Left	-2.06	-2.25	0.75	/	Pass
				RU26+106	/	-2.24	-3.55	-0.06	/	Pass
	802.11be (EHT80)	MIMO	6625	RU484	Left	-5.49	-5.38	-2.85	/	Pass
				RU996	Left	-5.16	-4.61	-2.22	/	Pass
				RU242+484	/	-6.78	-6.36	-3.79	/	Pass
			6705	RU484	Left	-5.19	-5.49	-2.68	/	Pass
				RU996	Left	-4.87	-3.98	-1.82	/	Pass
				RU242+484	/	-6.30	-6.23	-3.56	/	Pass
			6785	RU484	Right	-5.49	-5.21	-2.42	/	Pass
				RU996	Left	-4.92	-4.13	-1.74	/	Pass
				RU242+484	/	-6.03	-6.00	-3.36	/	Pass
	802.11be (EHT160)	MIMO	6665	RU996	Left	-8.27	-8.49	-5.67	/	Pass
				2xRU996	Left	-8.25	-7.16	-5.22	/	Pass
				RU484+996	/	-9.27	-9.27	-6.65	/	Pass


4.1.4 E.I.R.PSD

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum PSD (dBm/MHz)		Gain (dBi)		Maximum E.I.R.PSD (dBm/MHz)				Verdict
						ANT1	ANT0	ANT1	ANT0	ANT1	ANT0	MIMO	Limit	
NTNV	802.11be (EHT20)	MIMO	6535	RU26	Left	1.07	1.16	0.9	0.92	1.97	2.08	5.04	<=17	Pass
				RU52	Left	0.67	1.00	0.9	0.92	1.57	1.92	4.76	<=17	Pass
				RU106	Left	-0.14	1.20	0.9	0.92	0.76	2.12	4.50	<=17	Pass


			6695	RU242	Left	1.18	2.47	0.9	0.92	2.08	3.39	5.79	<=17	Pass
				RU26+52	/	-0.25	1.66	0.9	0.92	0.65	2.58	4.73	<=17	Pass
				RU26	Mid	0.96	0.90	0.9	0.92	1.86	1.82	4.85	<=17	Pass
				RU52	Mid	0.89	0.89	0.9	0.92	1.79	1.81	4.81	<=17	Pass
				RU106	Left	1.87	1.39	0.9	0.92	2.77	2.31	5.56	<=17	Pass
				RU242	Left	1.69	2.28	0.9	0.92	2.59	3.20	5.92	<=17	Pass
			RU26+52	/	1.04	1.14	0.9	0.92	1.94	2.06	5.01	<=17	Pass	
			6855	RU26	Right	1.15	0.98	0.9	0.92	2.05	1.90	4.99	<=17	Pass
				RU52	Right	0.94	0.54	0.9	0.92	1.84	1.46	4.66	<=17	Pass
				RU106	Right	1.33	0.37	0.9	0.92	2.23	1.29	4.80	<=17	Pass
				RU242	Left	1.27	1.21	0.9	0.92	2.17	2.13	5.16	<=17	Pass
			RU26+52	/	1.30	0.57	0.9	0.92	2.20	1.49	4.87	<=17	Pass	
	802.11be (EHT40)	MIMO	6565	RU242	Left	-2.97	-1.94	0.9	0.92	-2.07	-1.02	1.50	<=17	Pass
				RU484	Left	-2.28	-1.76	0.9	0.92	-1.38	-0.84	1.91	<=17	Pass
				RU26+106	/	-3.21	-1.97	0.9	0.92	-2.31	-1.05	1.38	<=17	Pass
			6685	RU242	Left	-2.64	-2.50	0.9	0.92	-1.74	-1.58	1.35	<=17	Pass
				RU484	Left	-2.18	-1.30	0.9	0.92	-1.28	-0.38	2.20	<=17	Pass
				RU26+106	/	-3.31	-1.86	0.9	0.92	-2.41	-0.94	1.40	<=17	Pass
			6845	RU242	Right	-2.05	-3.10	0.9	0.92	-1.15	-2.18	1.38	<=17	Pass
				RU484	Left	-2.06	-2.25	0.9	0.92	-1.16	-1.33	1.77	<=17	Pass
				RU26+106	/	-2.24	-3.55	0.9	0.92	-1.34	-2.63	1.07	<=17	Pass
	802.11be (EHT80)	MIMO	6625	RU484	Left	-5.49	-5.38	0.9	0.92	-4.59	-4.46	-1.51	<=17	Pass
				RU996	Left	-5.16	-4.61	0.9	0.92	-4.26	-3.69	-0.96	<=17	Pass
				RU242+484	/	-6.78	-6.36	0.9	0.92	-5.88	-5.44	-2.64	<=17	Pass
			6705	RU484	Left	-5.19	-5.49	0.9	0.92	-4.29	-4.57	-1.42	<=17	Pass
				RU996	Left	-4.87	-3.98	0.9	0.92	-3.97	-3.06	-0.48	<=17	Pass
				RU242+484	/	-6.30	-6.23	0.9	0.92	-5.40	-5.31	-2.34	<=17	Pass
			6785	RU484	Right	-5.49	-5.21	0.9	0.92	-4.59	-4.29	-1.43	<=17	Pass
				RU996	Left	-4.92	-4.13	0.9	0.92	-4.02	-3.21	-0.59	<=17	Pass
				RU242+484	/	-6.03	-6.00	0.9	0.92	-5.13	-5.08	-2.09	<=17	Pass
	802.11be (EHT160)	MIMO	6665	RU996	Left	-8.27	-8.49	0.9	0.92	-7.37	-7.57	-4.46	<=17	Pass
				2xRU996	Left	-8.25	-7.16	0.9	0.92	-7.35	-6.24	-3.75	<=17	Pass
				RU484+996	/	-9.27	-9.27	0.9	0.92	-8.37	-8.35	-5.35	<=17	Pass

4.2 Test Graph


4.2.1 PSD

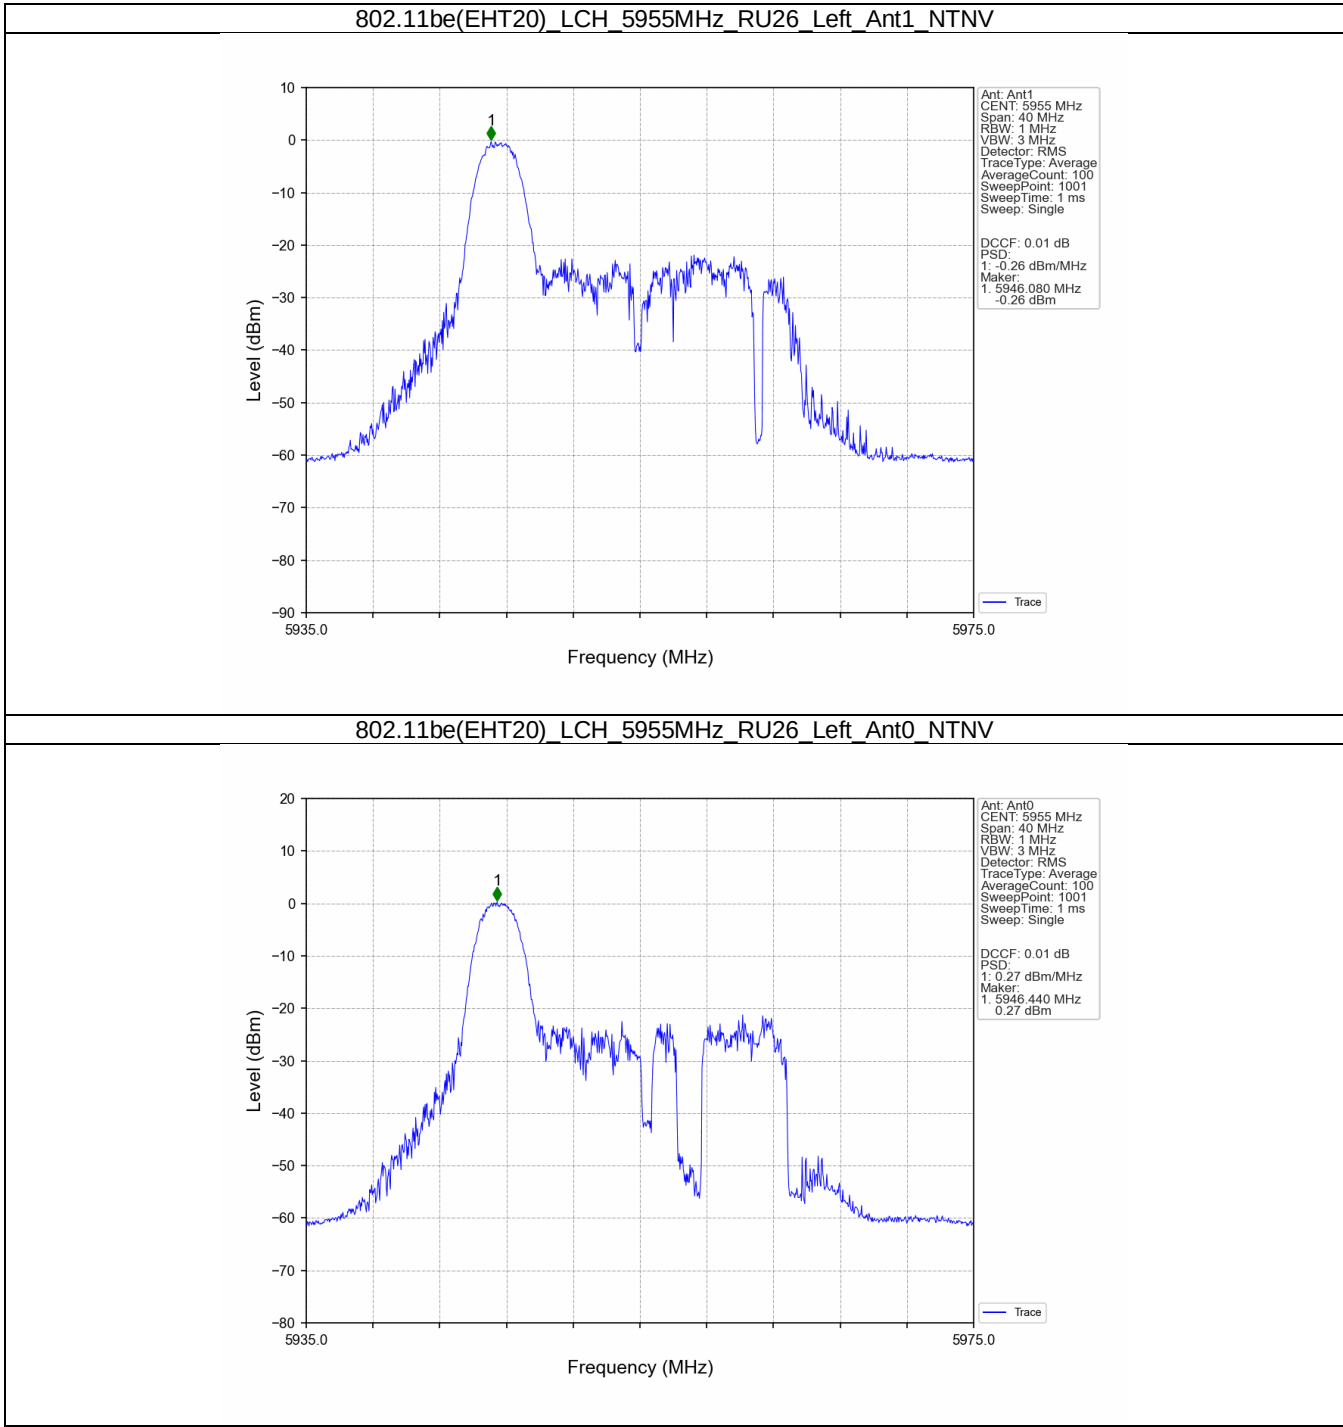


802.11be(EHT20)_LCH_5955MHz_RU26_Left_MIMO_NTNV

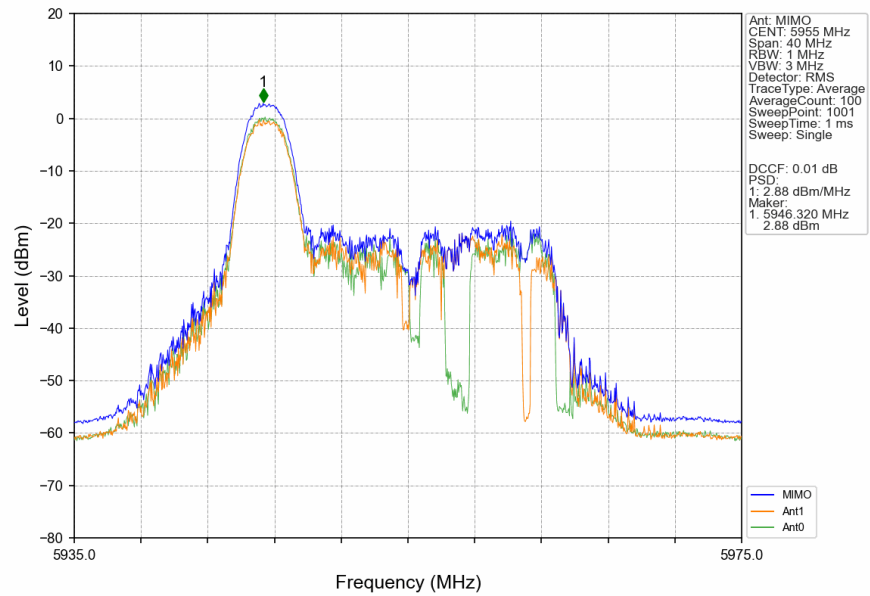


802.11be(EHT20)_LCH_5955MHz_RU52_Left_Ant1_NTNV

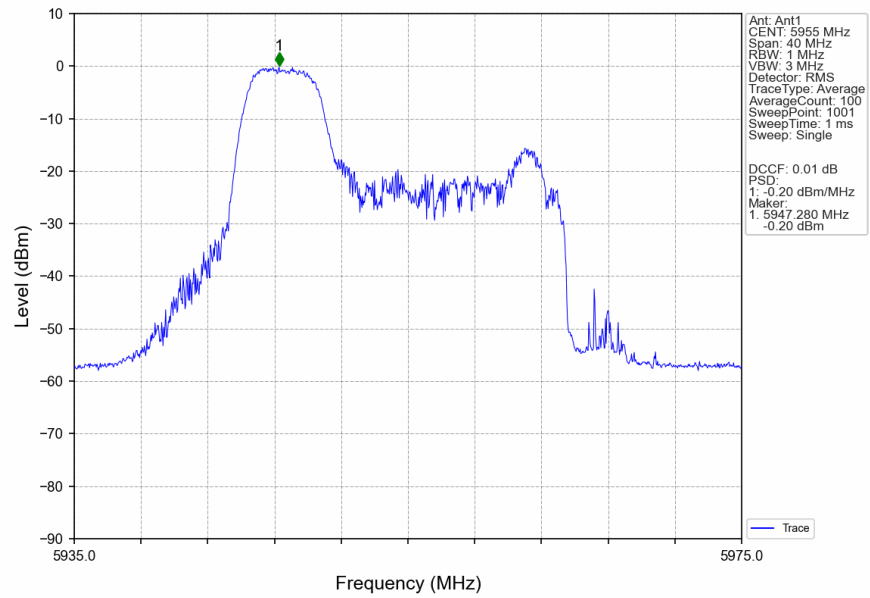


802.11be(EHT20) LCH 5955MHz RU52 Left Ant0 NTN

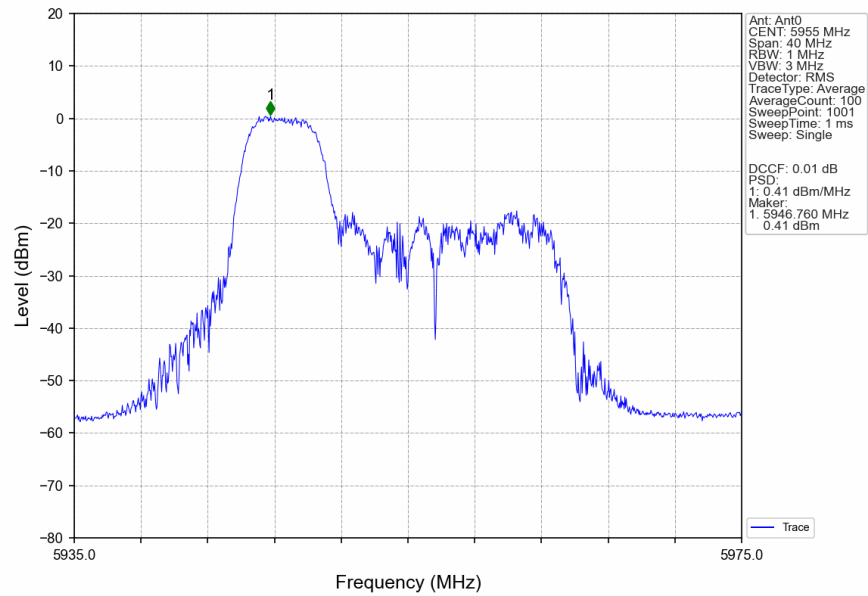


802.11be(EHT20) LCH 5955MHz RU52 Left MIMO NTN

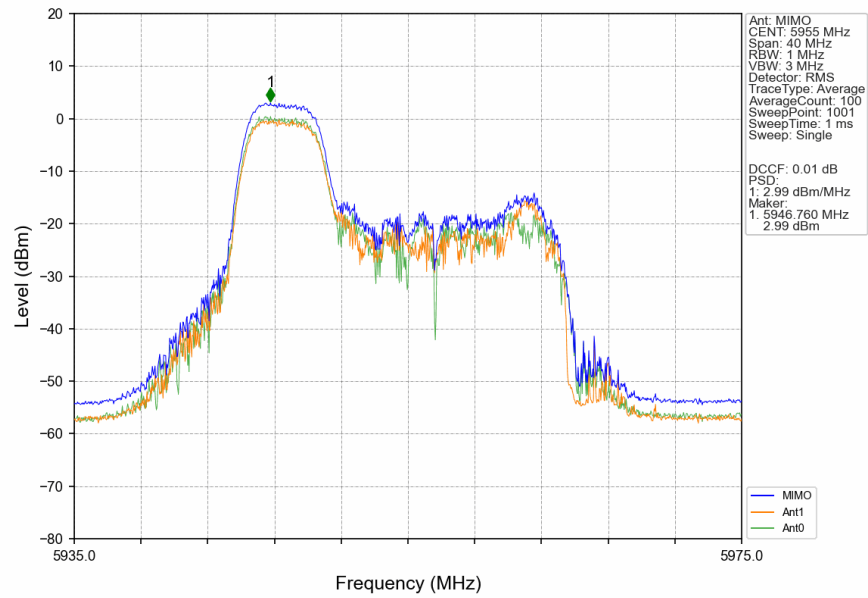


802.11be(EHT20) LCH_5955MHz_RU106_Left_Ant1_NTNV

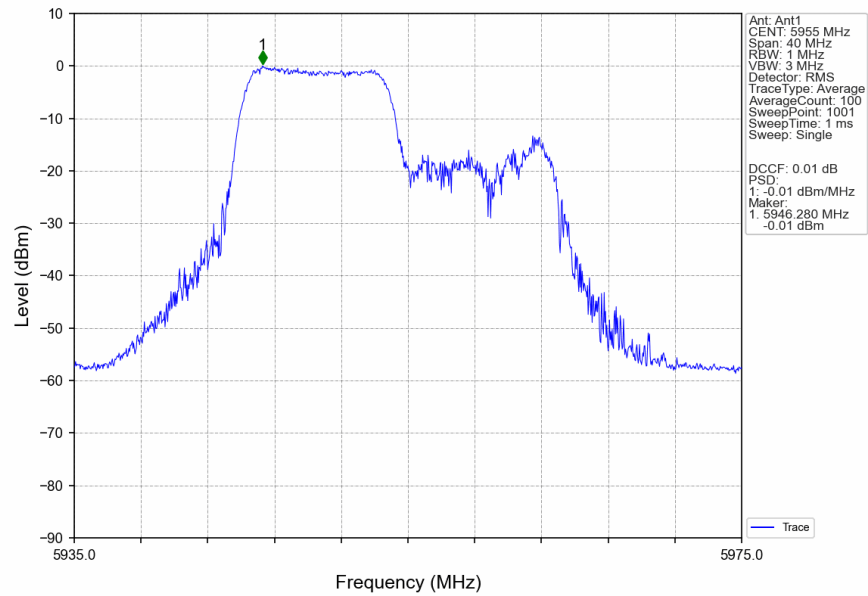


802.11be(EHT20) LCH_5955MHz_RU106_Left_Ant0_NTNV

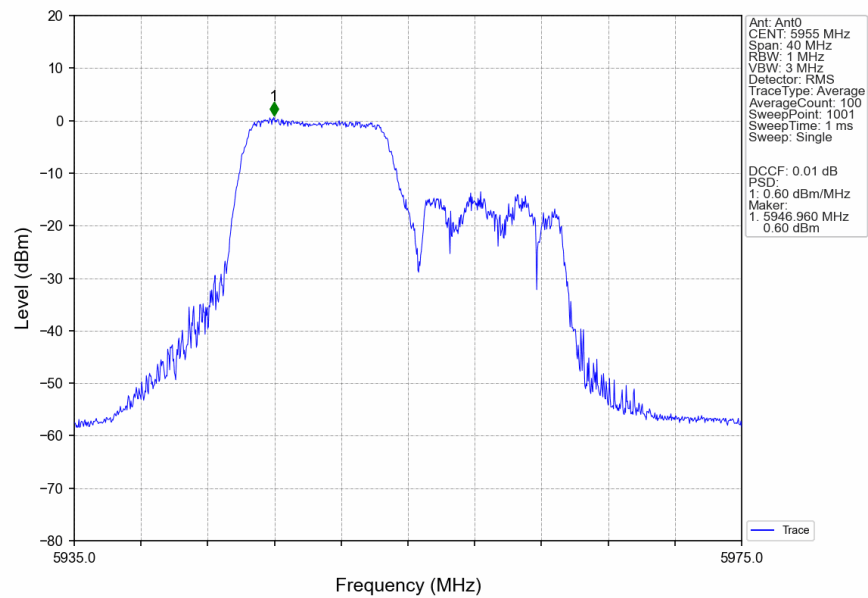


802.11be(EHT20) LCH 5955MHz RU106 Left MIMO NTN

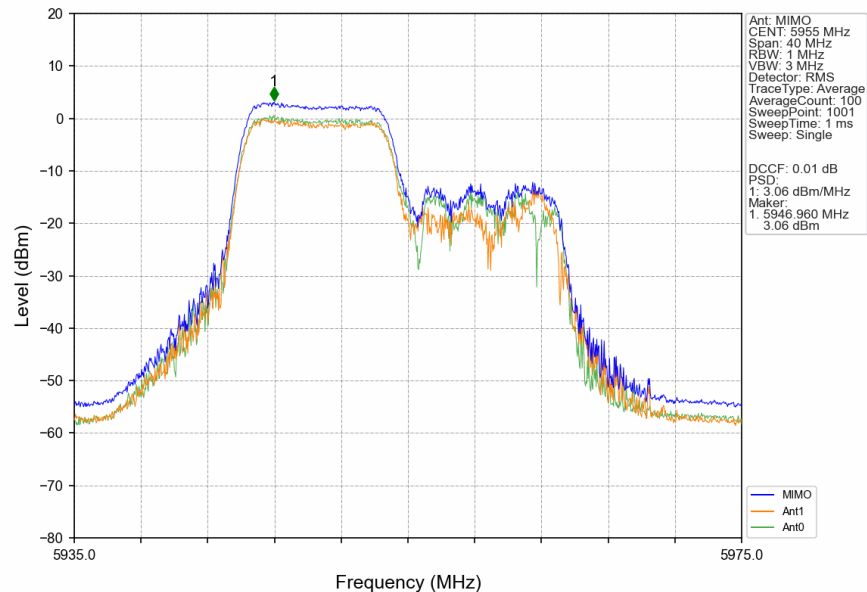


802.11be(EHT20) LCH 5955MHz RU242 Left Ant1 NTN

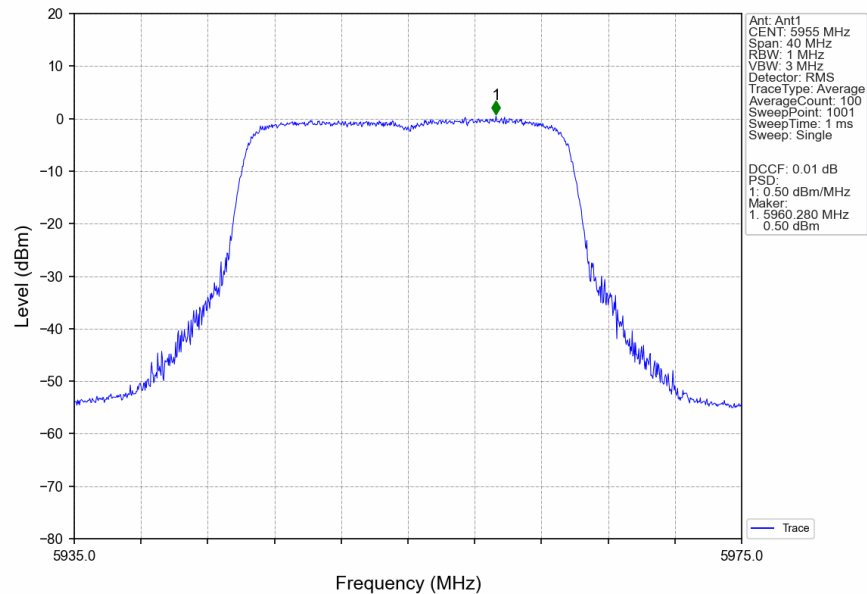


802.11be(EHT20)_LCH_5955MHz_RU242_Left_Ant0_NTNV

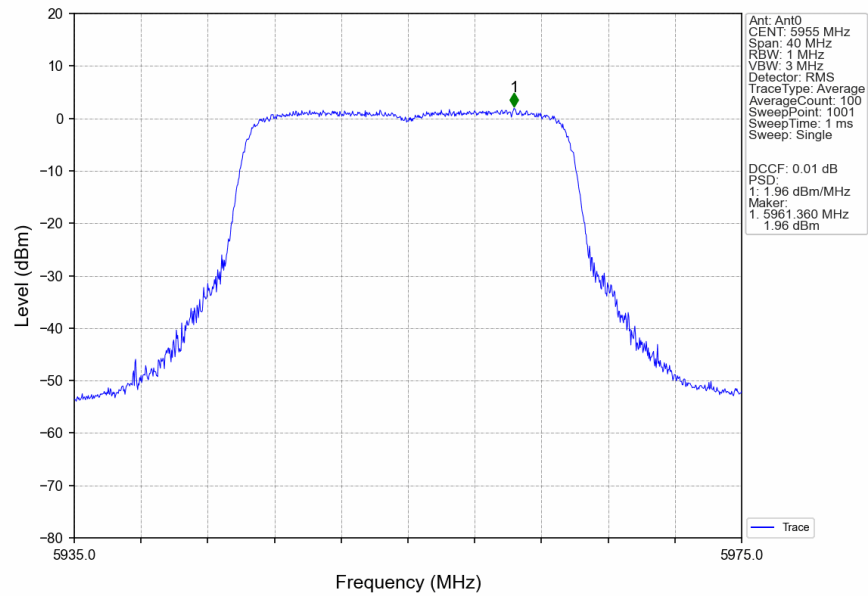


802.11be(EHT20)_LCH_5955MHz_RU242_Left_MIMO_NTNV

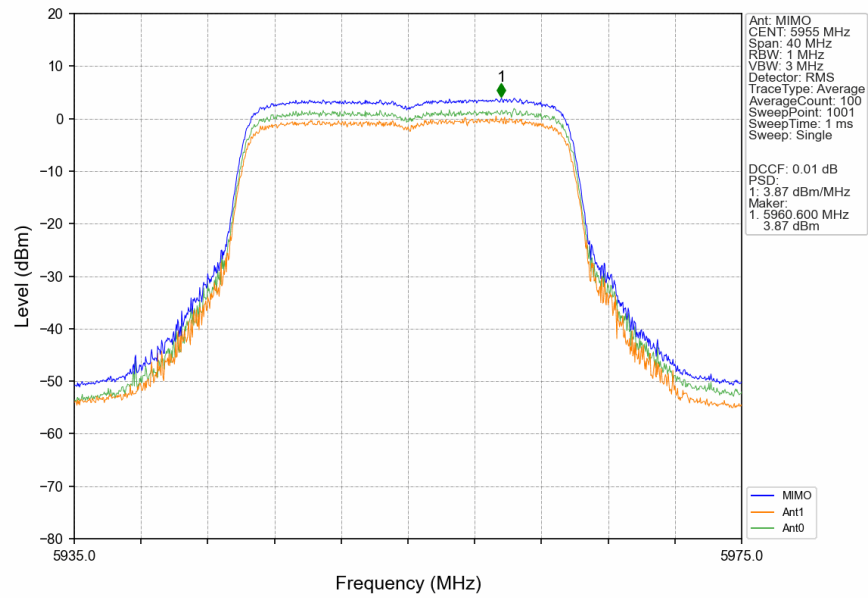


802.11be(EHT20)_LCH_5955MHz_26+52 / Ant1_NTNV

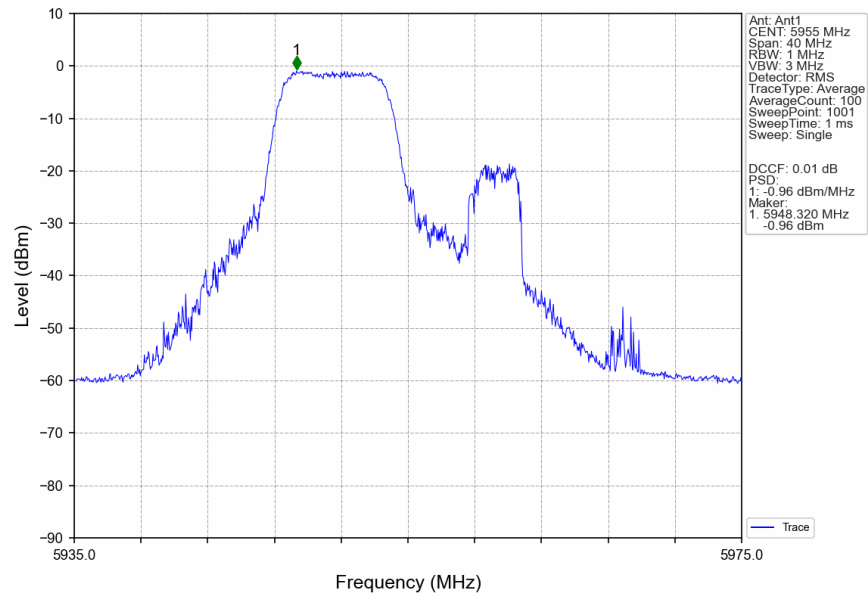


802.11be(EHT20)_LCH_5955MHz_26+52 / Ant0_NTNV

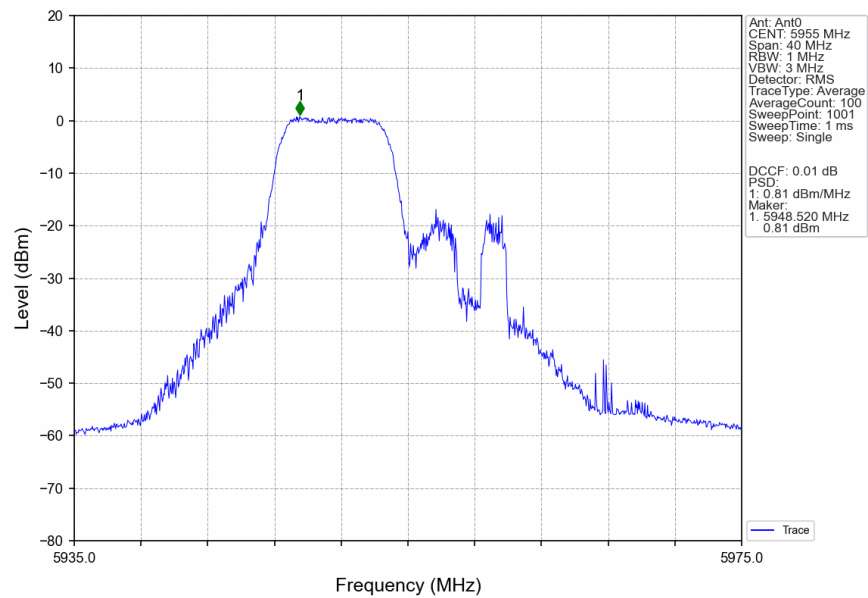


802.11be(EHT20) LCH 5955MHz 26+52 / MIMO NTN

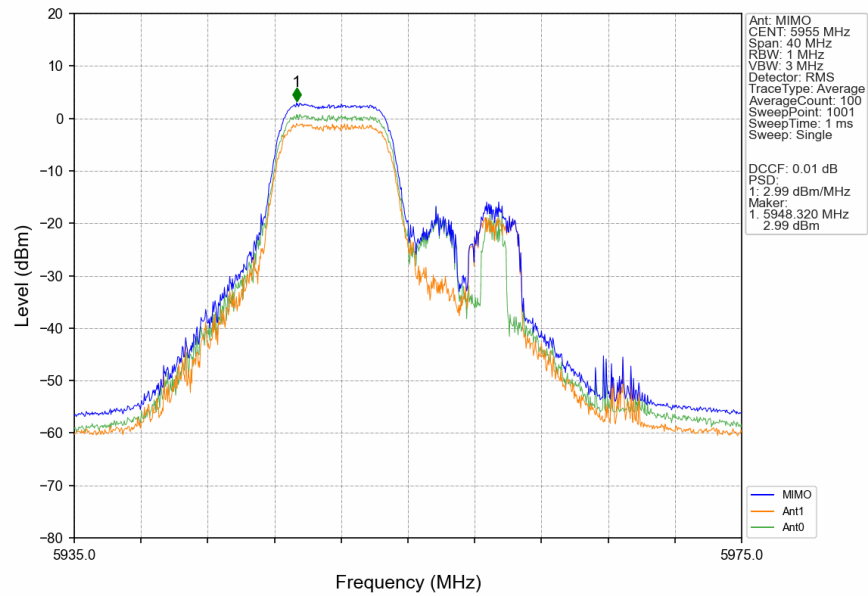


802.11be(EHT20)_MCH_6175MHz_RU26_Mid_Ant1_NTN

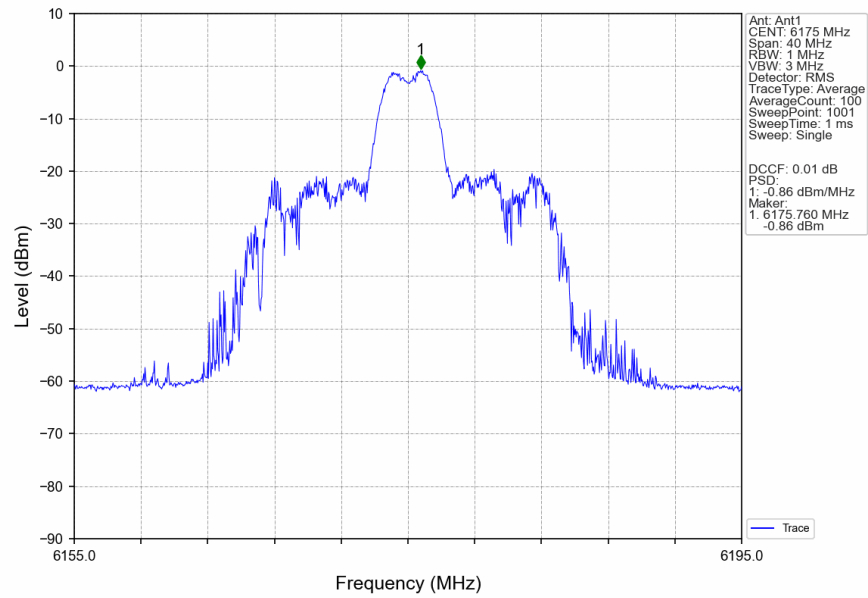


802.11be(EHT20) MCH 6175MHz RU26 Mid Ant0 NTN

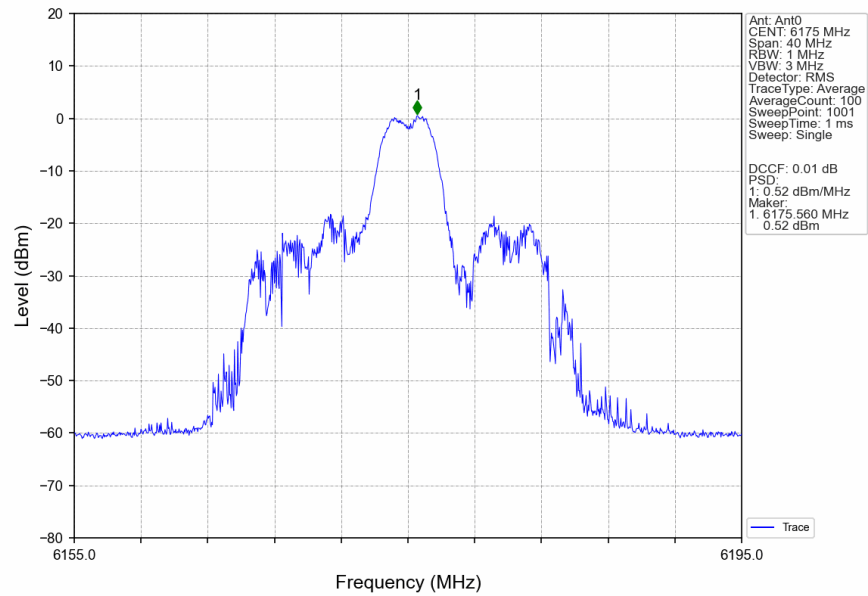


802.11be(EHT20) MCH 6175MHz RU26 Mid MIMO NTN

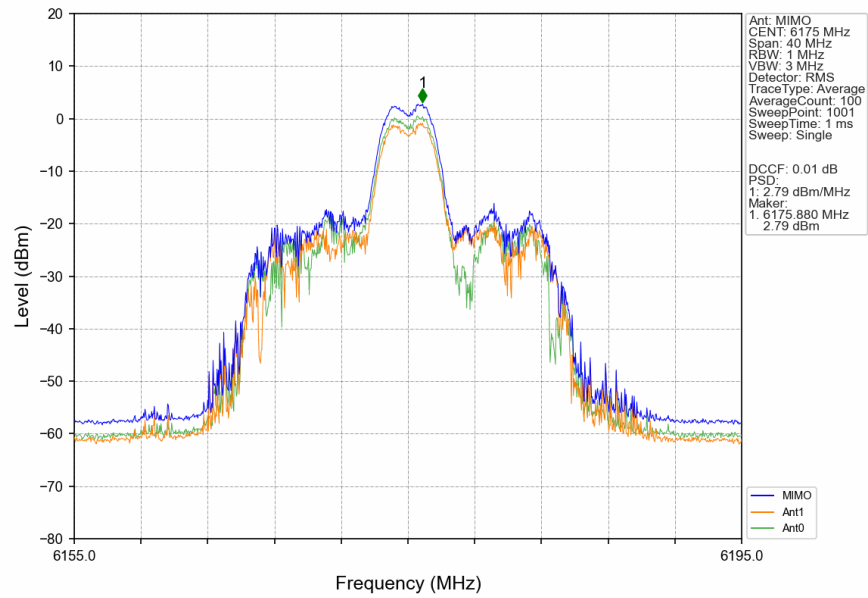


802.11be(EHT20)_MCH_6175MHz_RU52_Mid_Ant1_NTNV

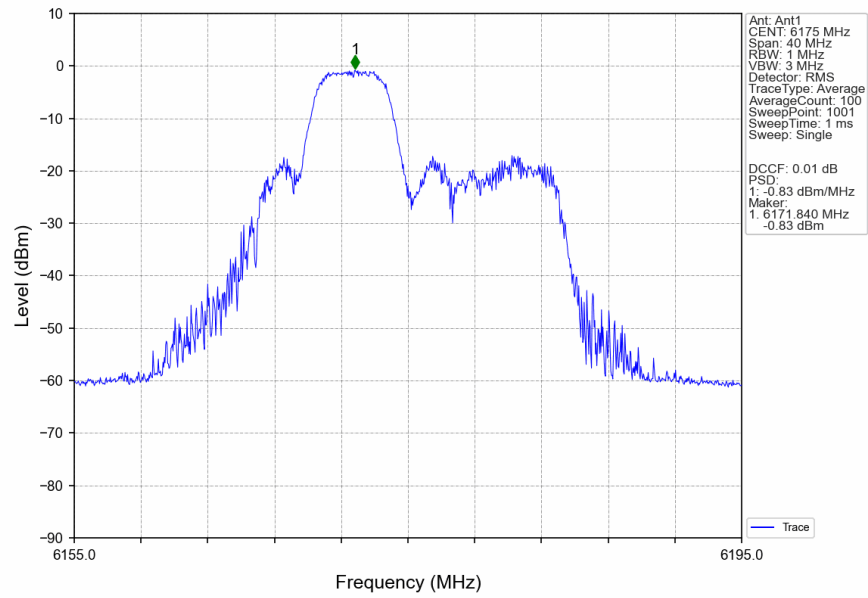


802.11be(EHT20)_MCH_6175MHz_RU52_Mid_Ant0_NTNV

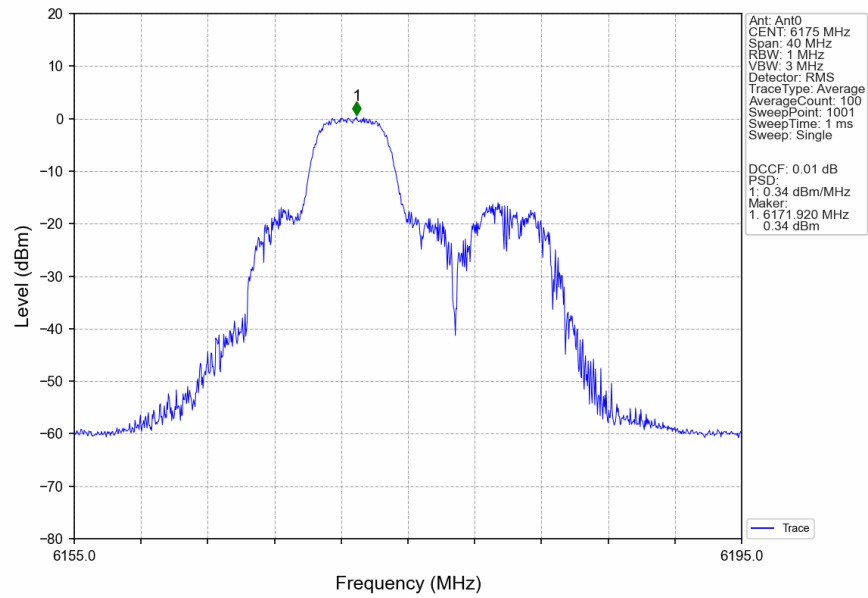


802.11be(EHT20) MCH 6175MHz RU52 Mid MIMO NTN

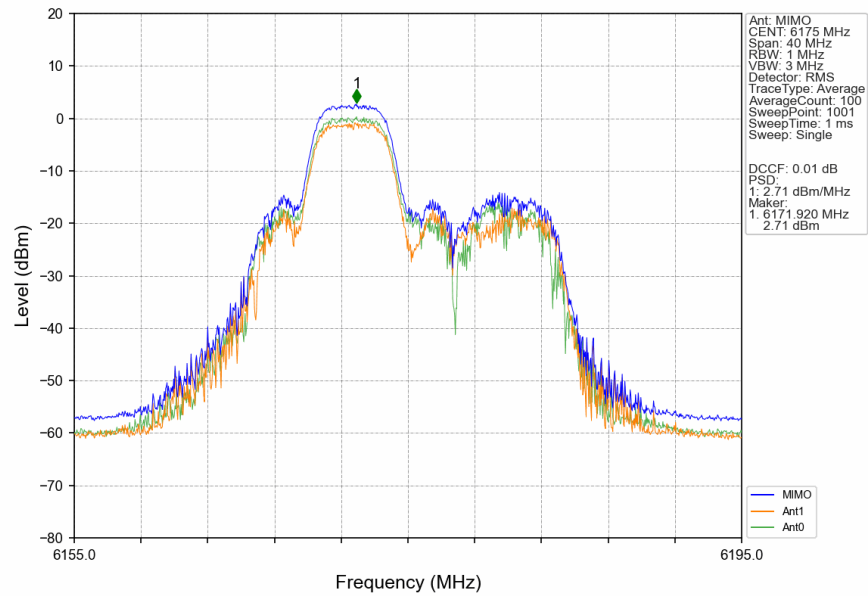


802.11be(EHT20) MCH 6175MHz RU106 Left Ant1 NTN

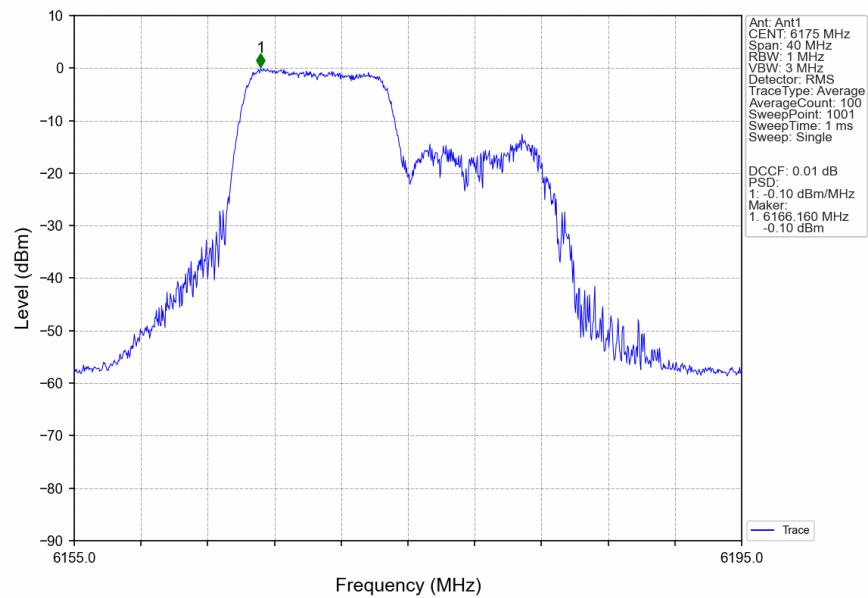


802.11be(EHT20) MCH 6175MHz RU106 Left Ant0 NTN

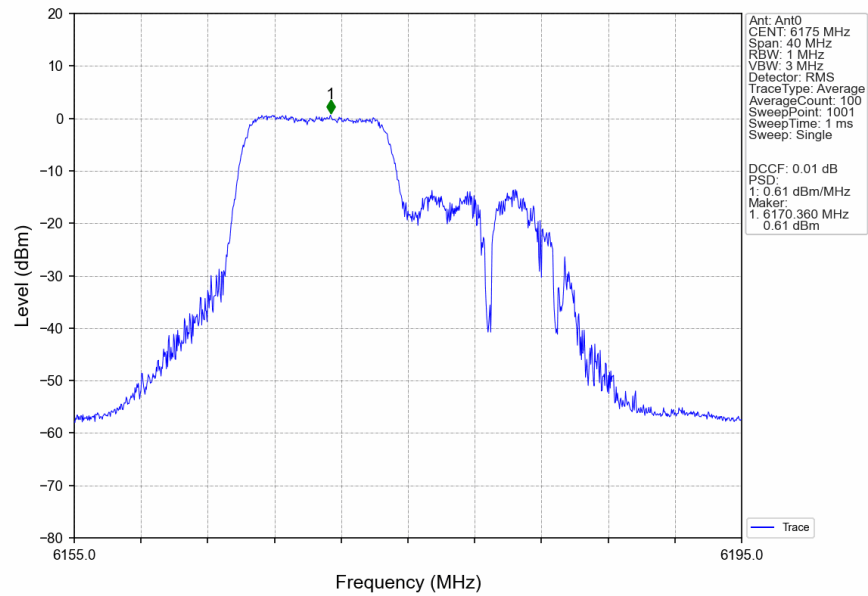


802.11be(EHT20)_MCH_6175MHz_RU106_Left_MIMO_NTNV

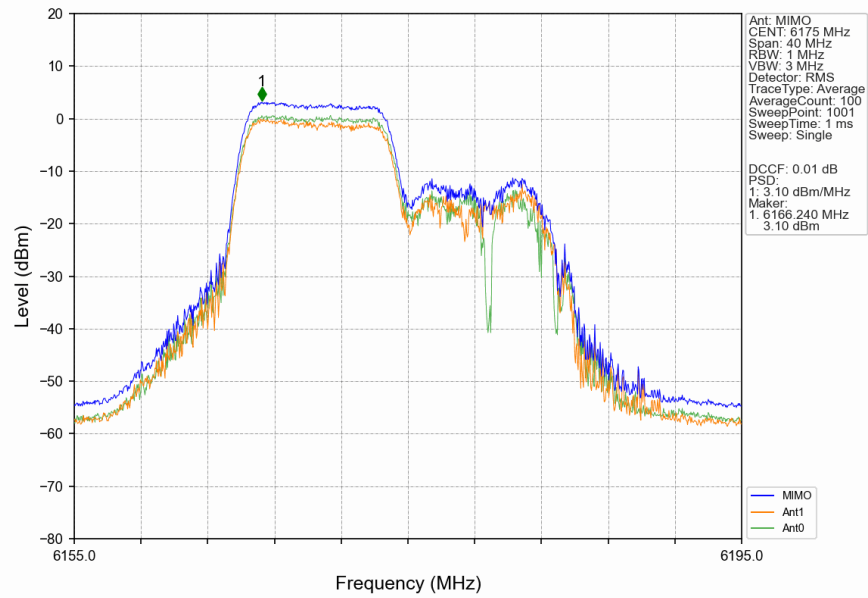


802.11be(EHT20)_MCH_6175MHz_RU242_Left_Ant1_NTNV

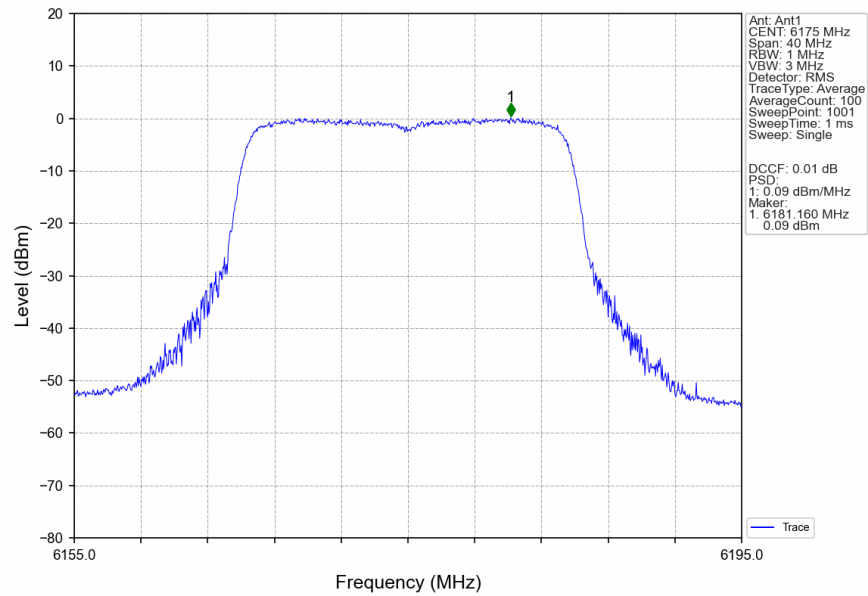


802.11be(EHT20)_MCH_6175MHz_RU242_Left_Ant0_NTNV

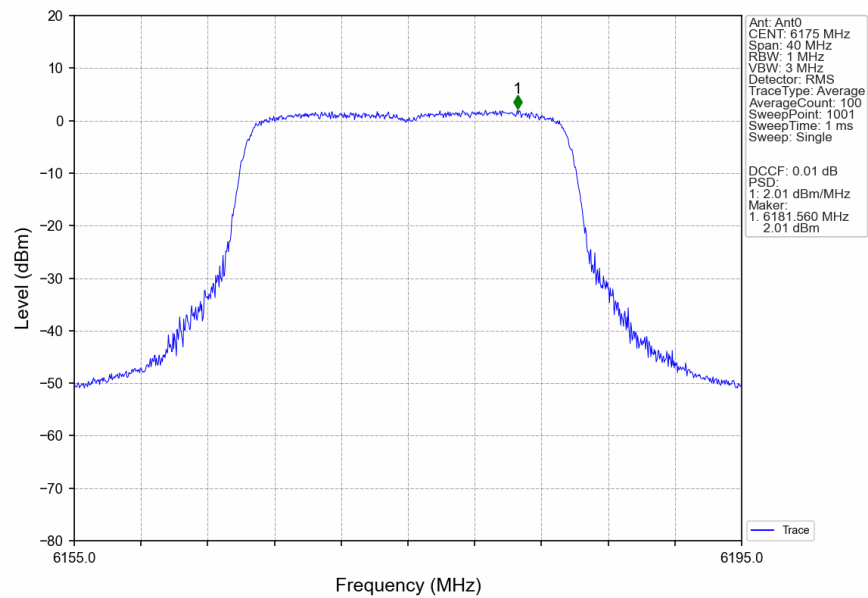


802.11be(EHT20) MCH 6175MHz RU242 Left MIMO NTN

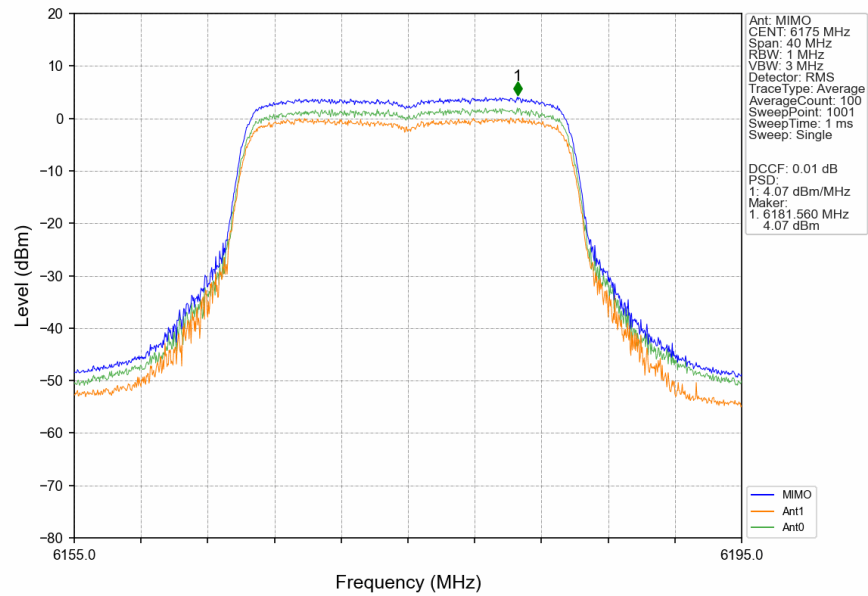


802.11be(EHT20) MCH 6175MHz 26+52 / Ant1 NTN

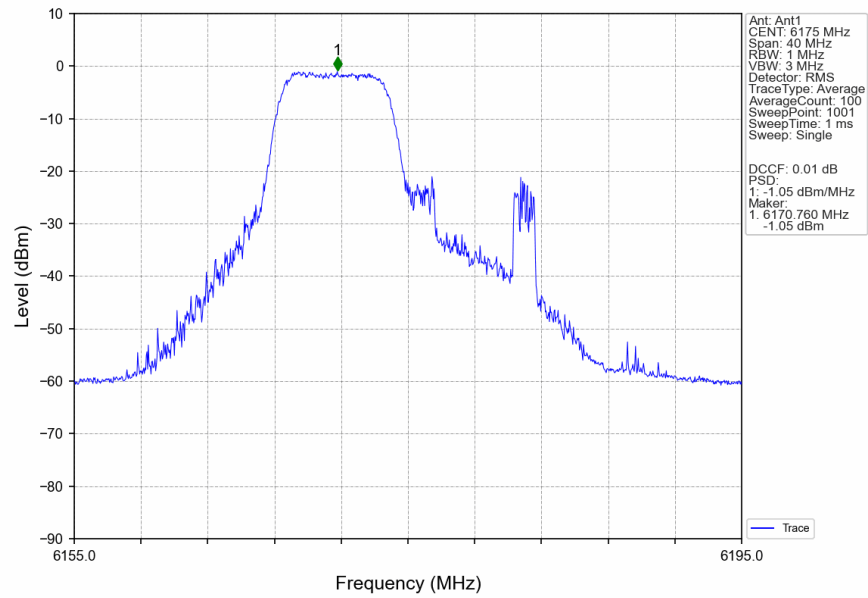


802.11be(EHT20) MCH 6175MHz 26+52 / Ant0 NTN

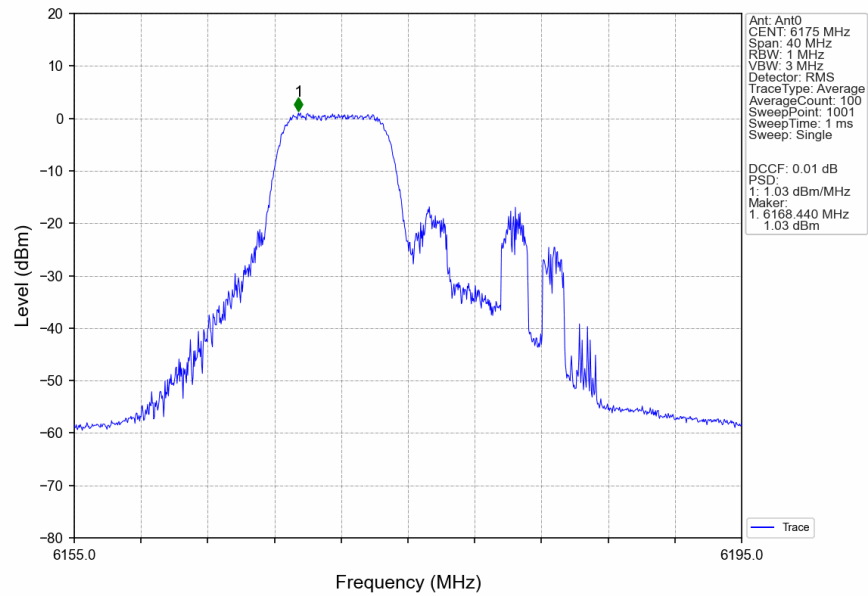


802.11be(EHT20) MCH 6175MHz 26+52 / MIMO NTN

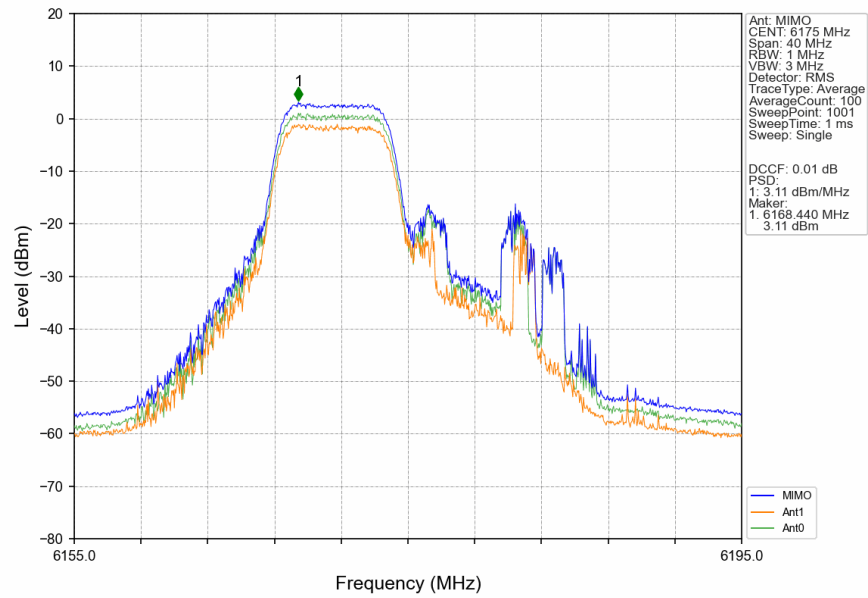


802.11be(EHT20) HCH 6415MHz RU26 Right Ant1 NTN

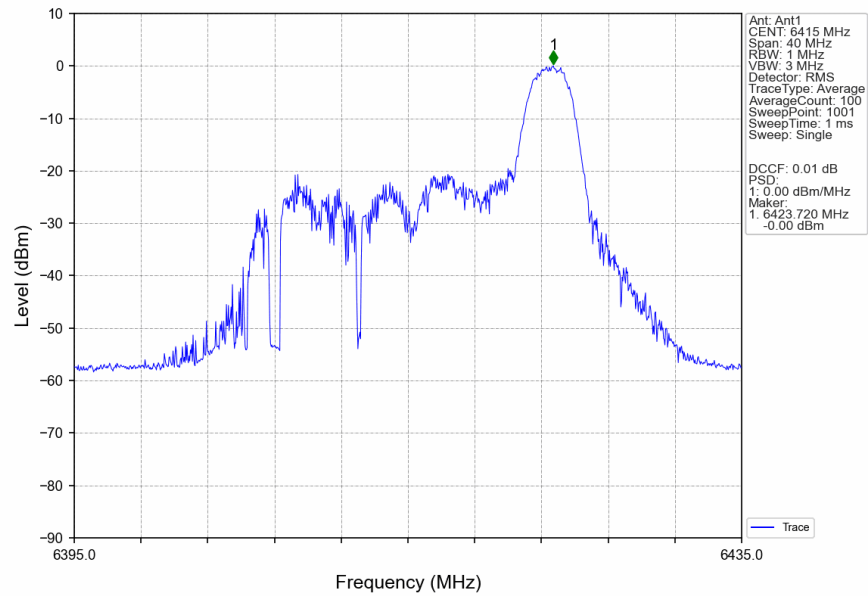


802.11be(EHT20) HCH 6415MHz RU26 Right Ant0 NTN

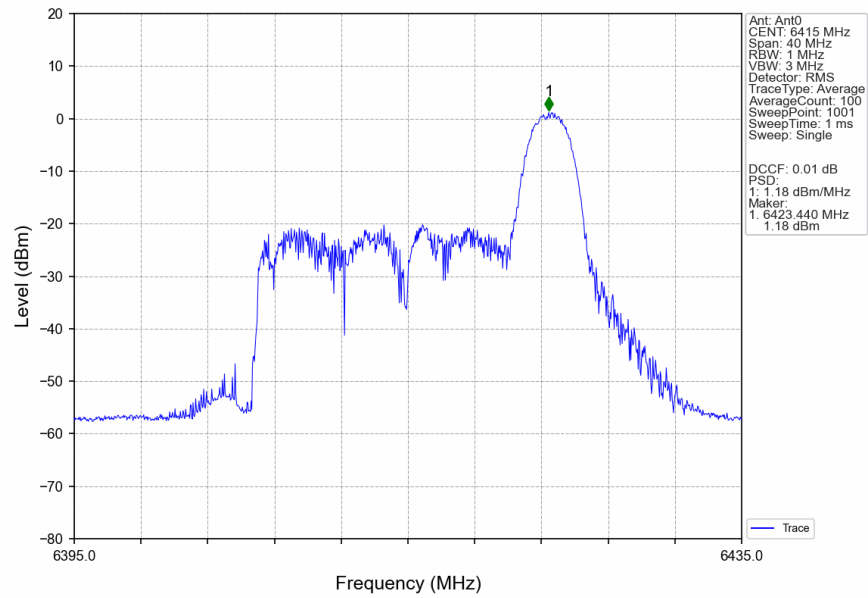


802.11be(EHT20) HCH 6415MHz RU26 Right MIMO NTN

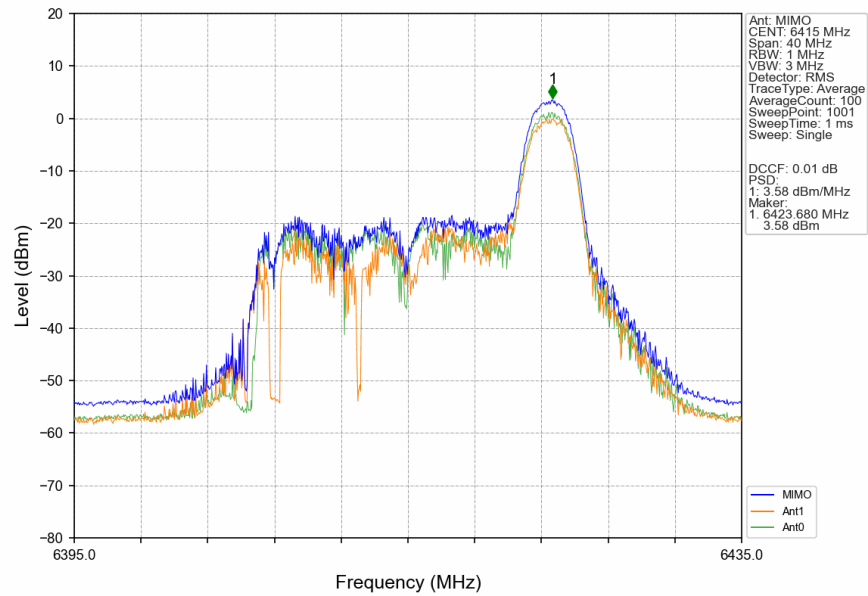


802.11be(EHT20) HCH 6415MHz RU52 Right Ant1 NTN

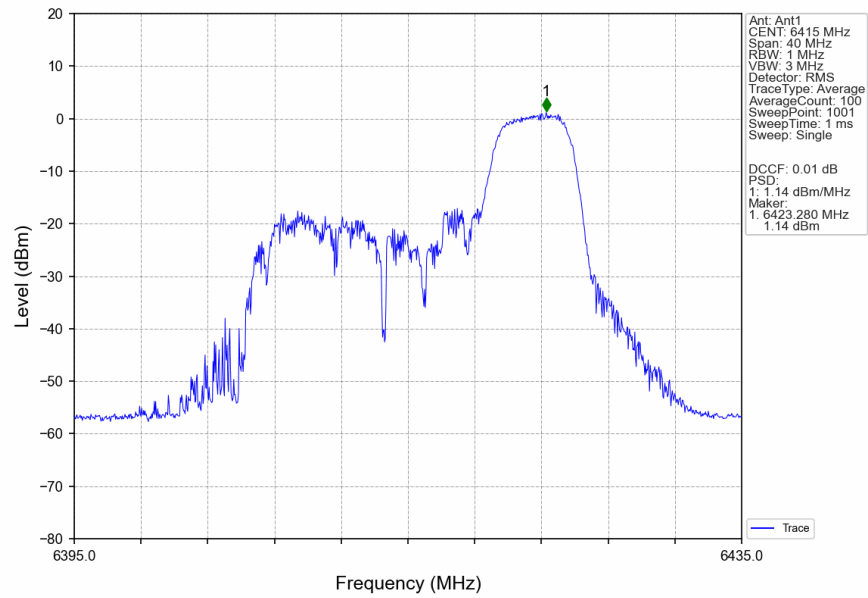


802.11be(EHT20)_HCH_6415MHz_RU52_Right_Ant0_NTNV

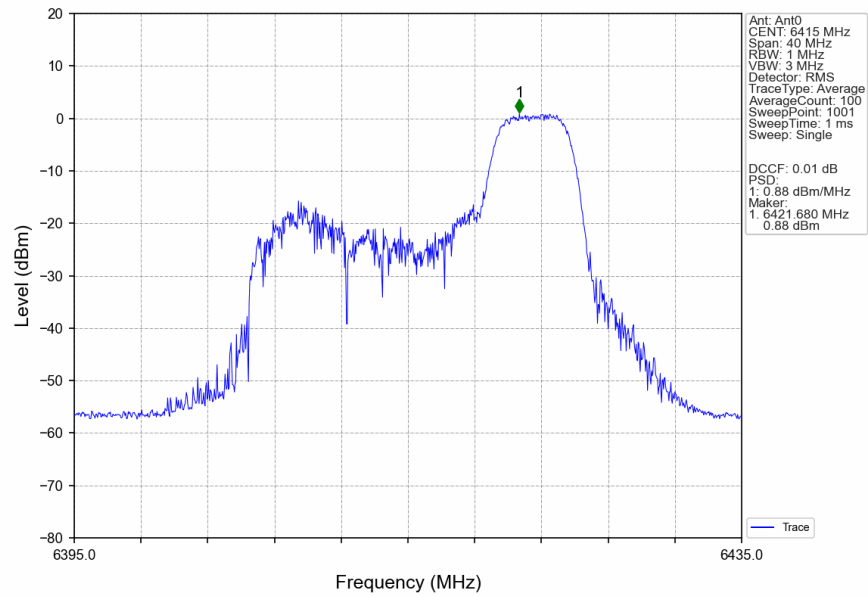


802.11be(EHT20)_HCH_6415MHz_RU52_Right_MIMO_NTNV

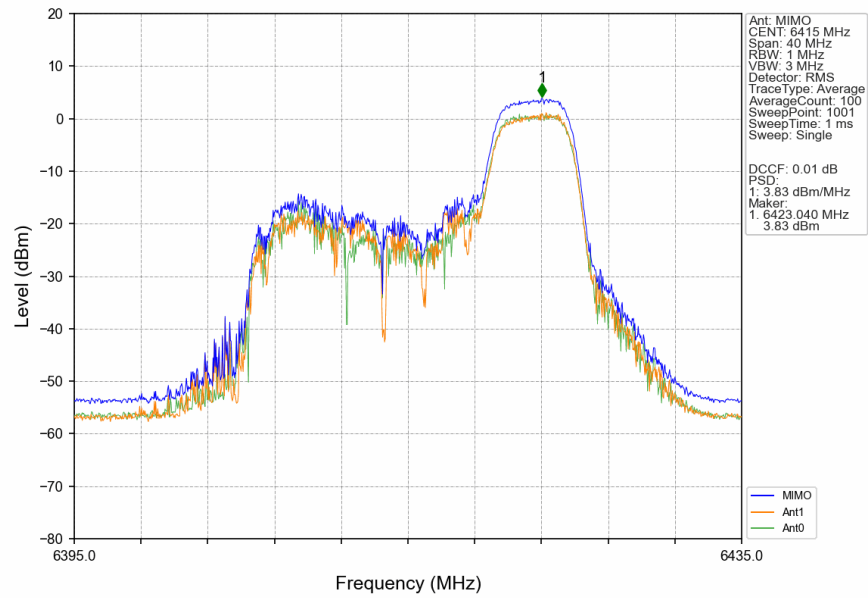


802.11be(EHT20) HCH 6415MHz RU106 Right Ant1 NTN

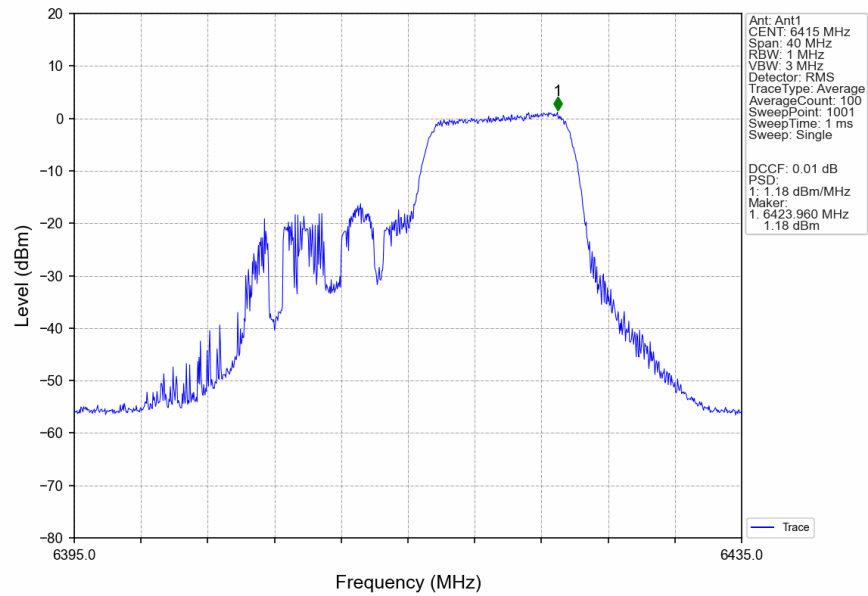


802.11be(EHT20)_HCH_6415MHz_RU106_Right_Ant0_NTNV

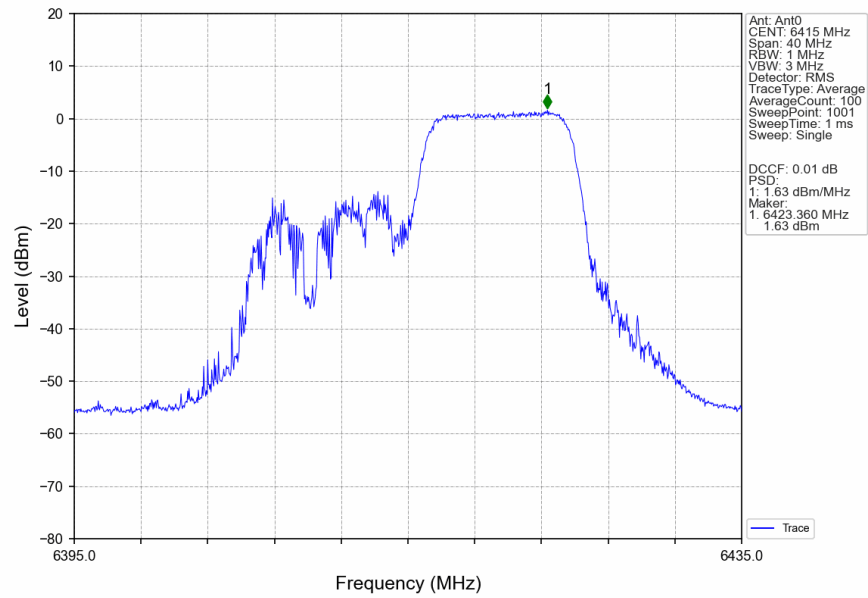


802.11be(EHT20) HCH 6415MHz RU106 Right MIMO NTN

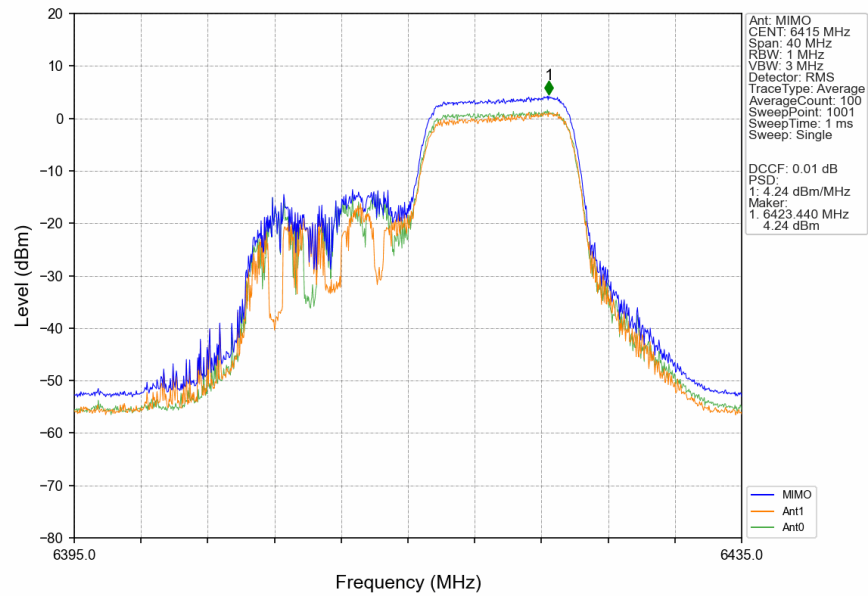


802.11be(EHT20) HCH 6415MHz RU242 Left Ant1 NTN

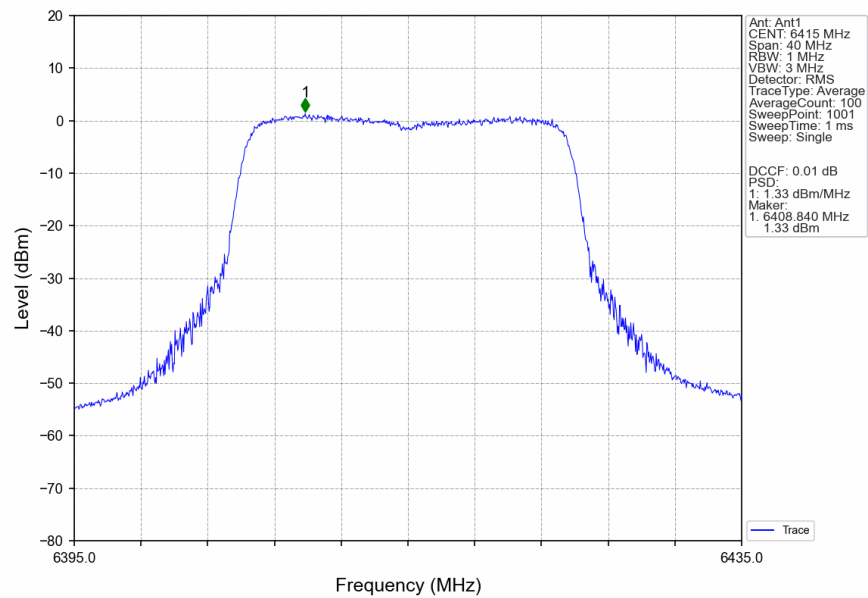


802.11be(EHT20) HCH 6415MHz RU242 Left Ant0 NTVN

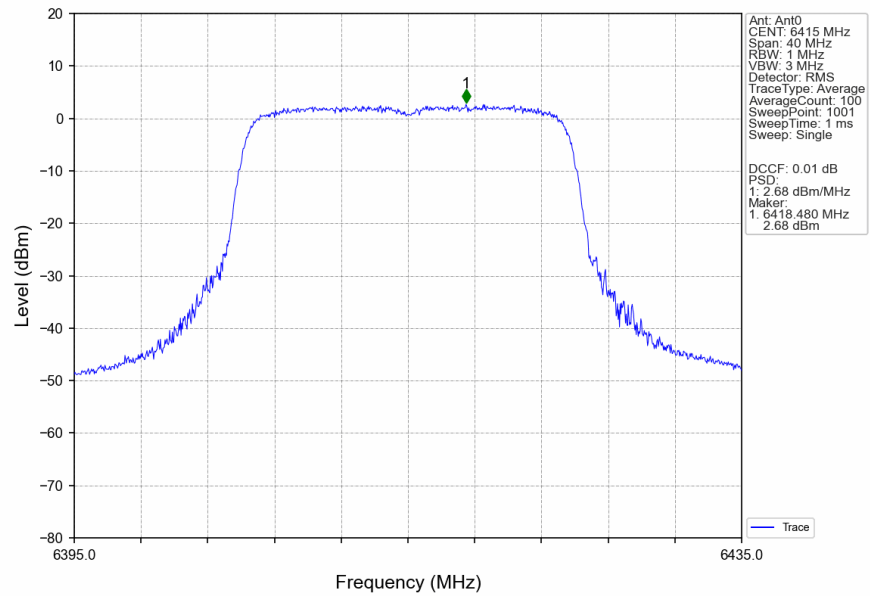


802.11be(EHT20) HCH 6415MHz RU242 Left MIMO NTVN

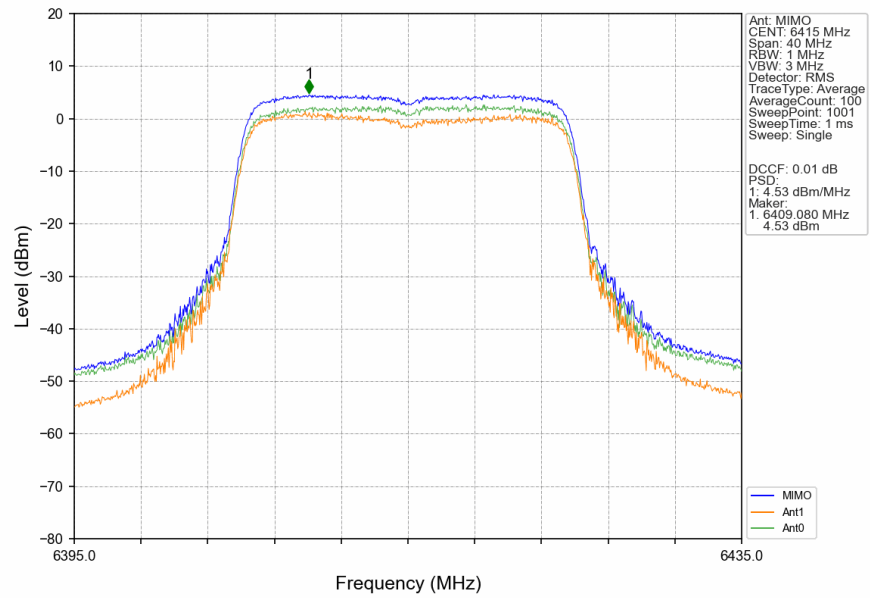


802.11be(EHT20) HCH 6415MHz 26+52 / Ant1 NTN

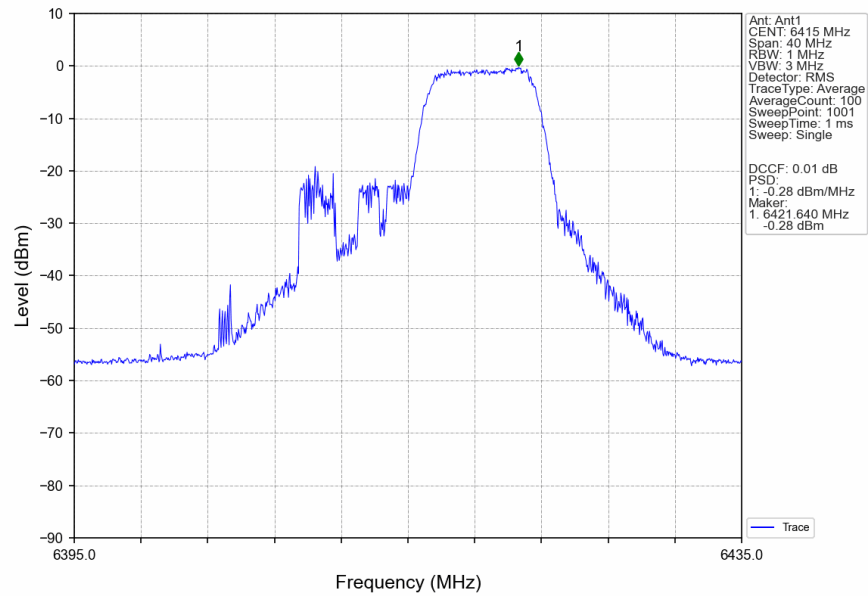


802.11be(EHT20) HCH 6415MHz 26+52 / Ant0 NTN

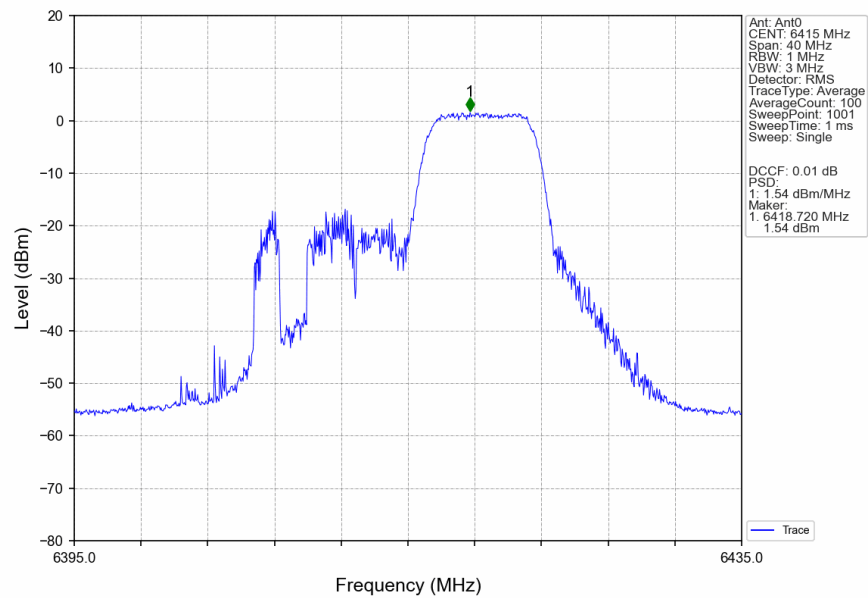


802.11be(EHT20) HCH 6415MHz 26+52 / MIMO NTNV

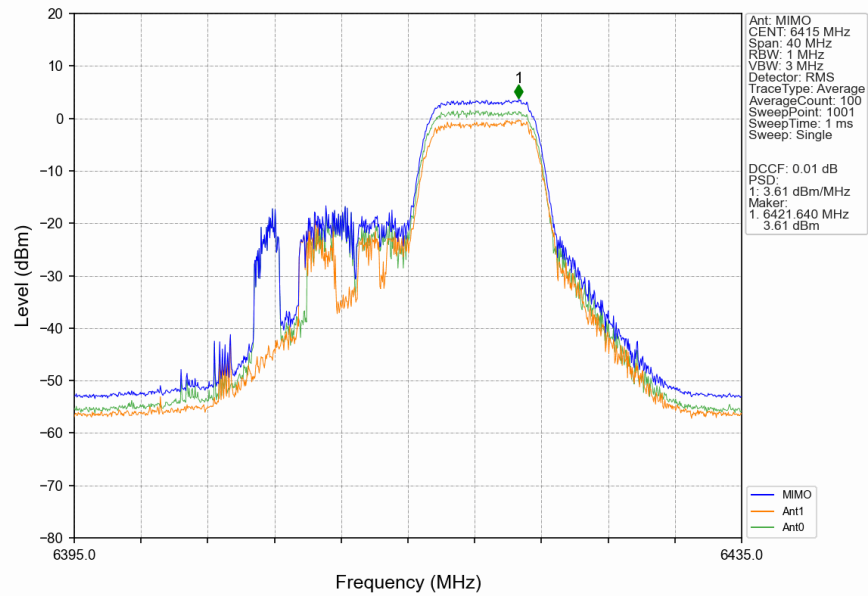


802.11be(EHT40) LCH 5965MHz RU242 Left_Ant1 NTNV

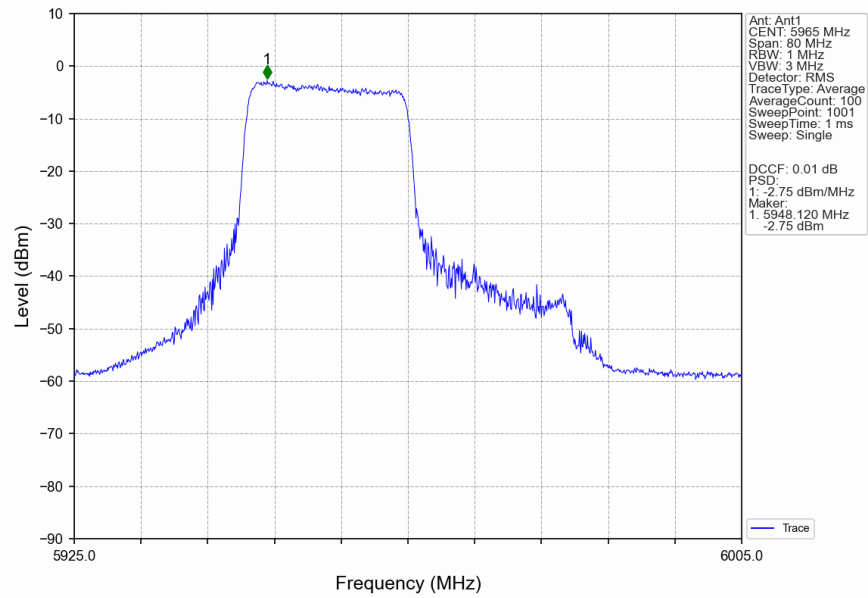


802.11be(EHT40)_LCH_5965MHz_RU242_Left_Ant0_NTNV

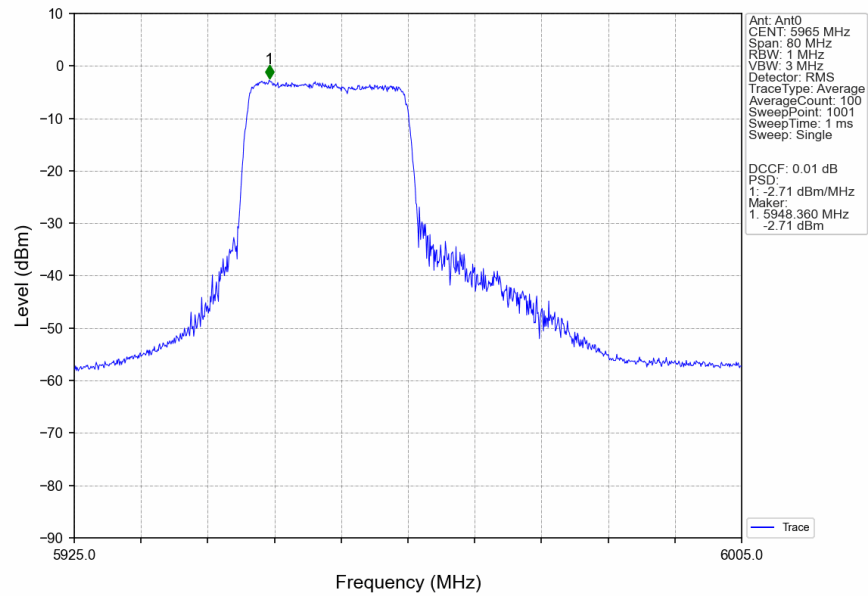


802.11be(EHT40)_LCH_5965MHz_RU242_Left_MIMO_NTNV

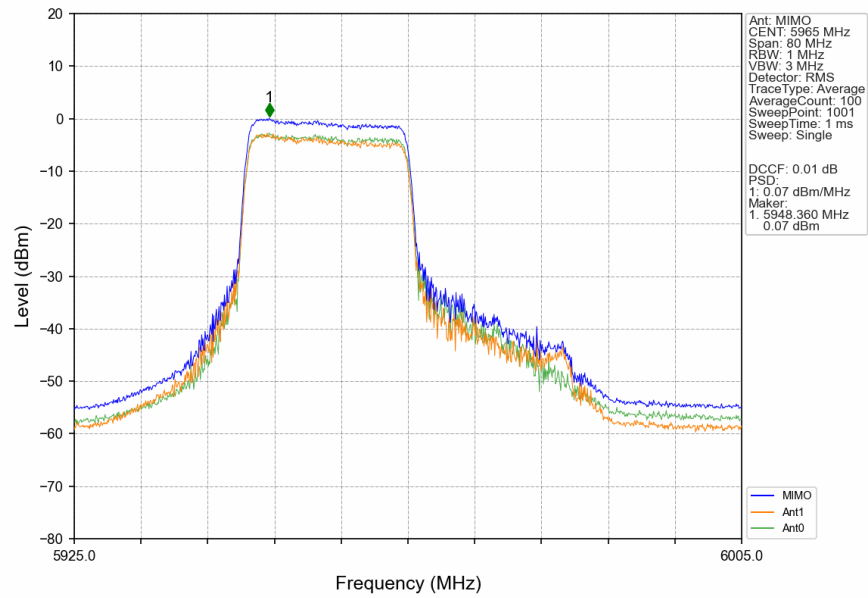


802.11be(EHT40) LCH_5965MHz_RU484_Left_Ant1_NTNV

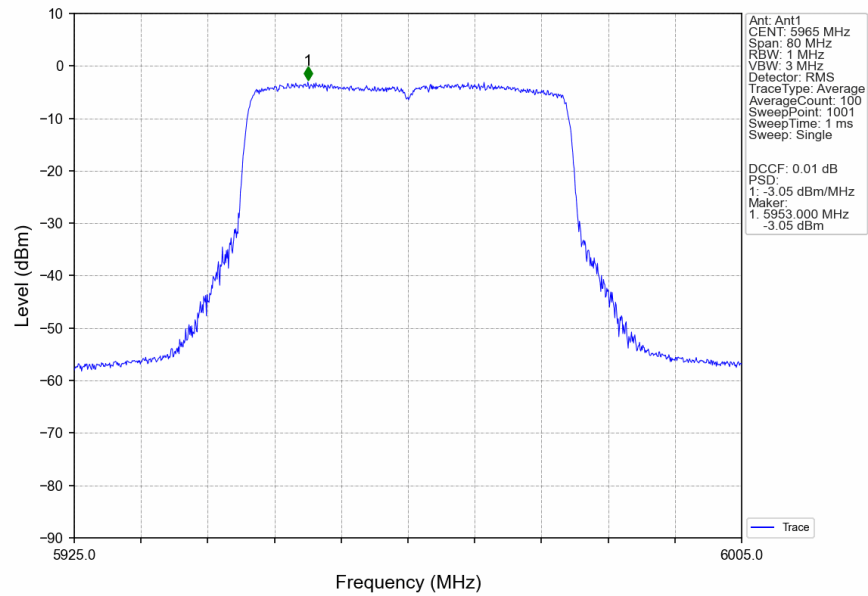


802.11be(EHT40) LCH_5965MHz_RU484_Left_Ant0_NTNV

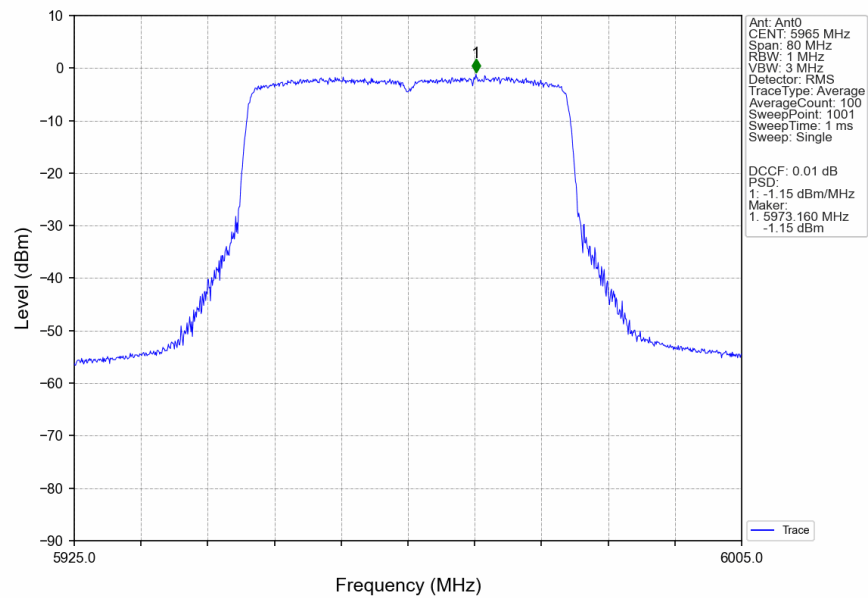


802.11be(EHT40) LCH 5965MHz RU484 Left MIMO NTN

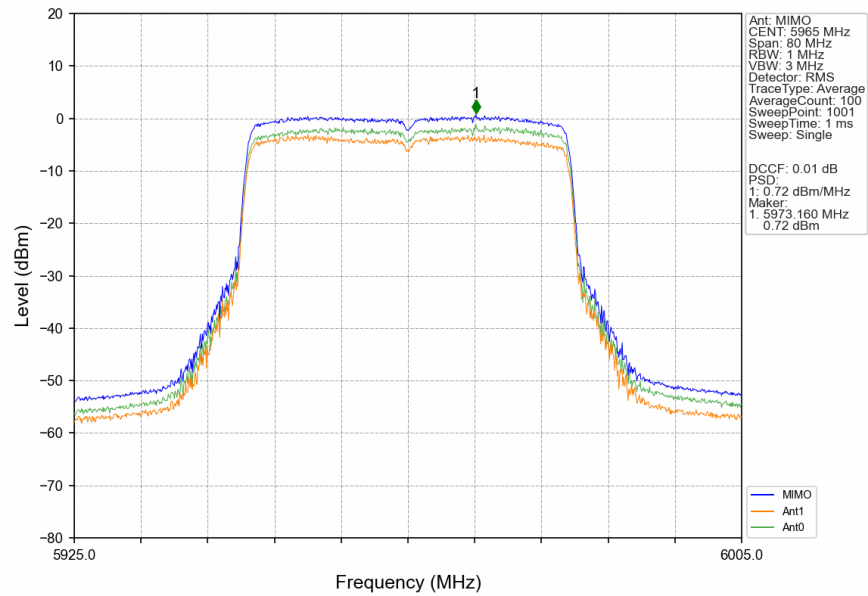


802.11be(EHT40) LCH 5965MHz 26+106 / Ant1 NTN

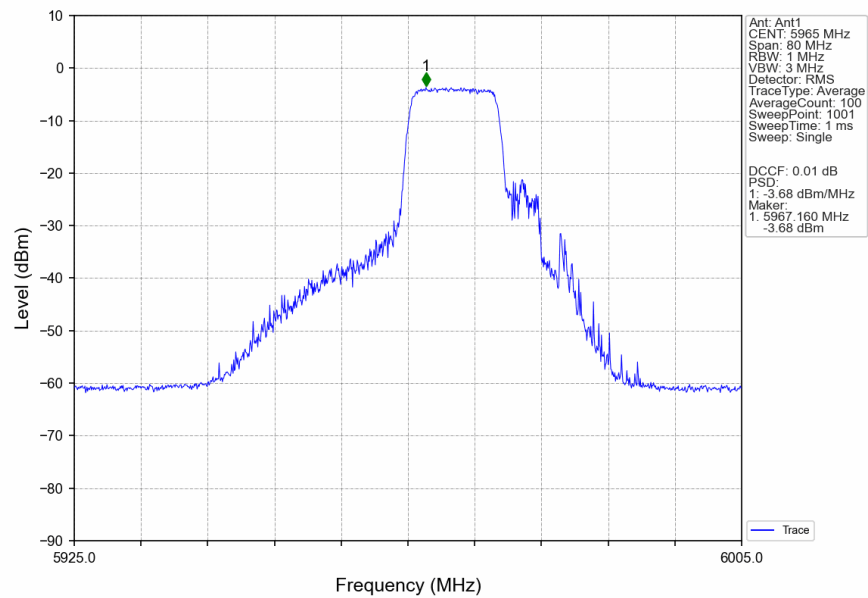


802.11be(EHT40) LCH 5965MHz 26+106 / Ant0 NTN

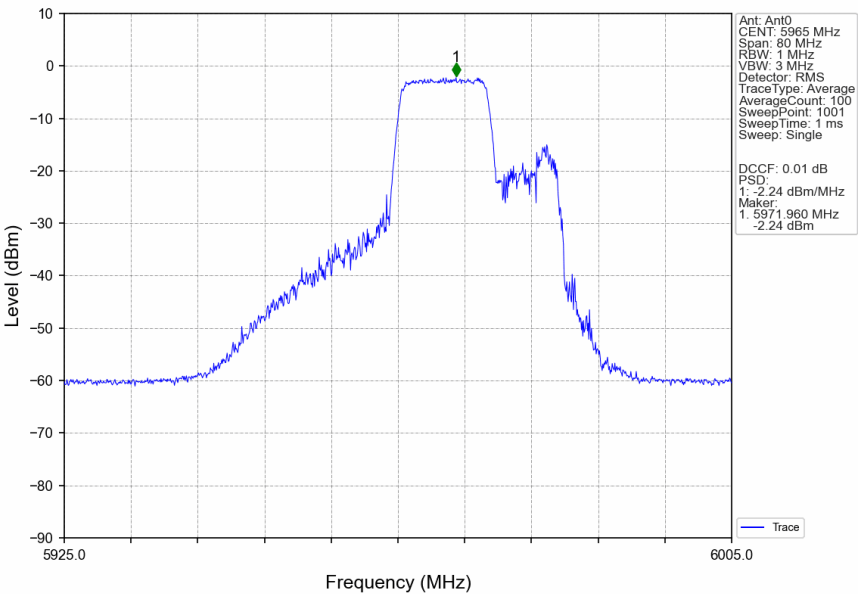


802.11be(EHT40) LCH 5965MHz 26+106 / MIMO NTN

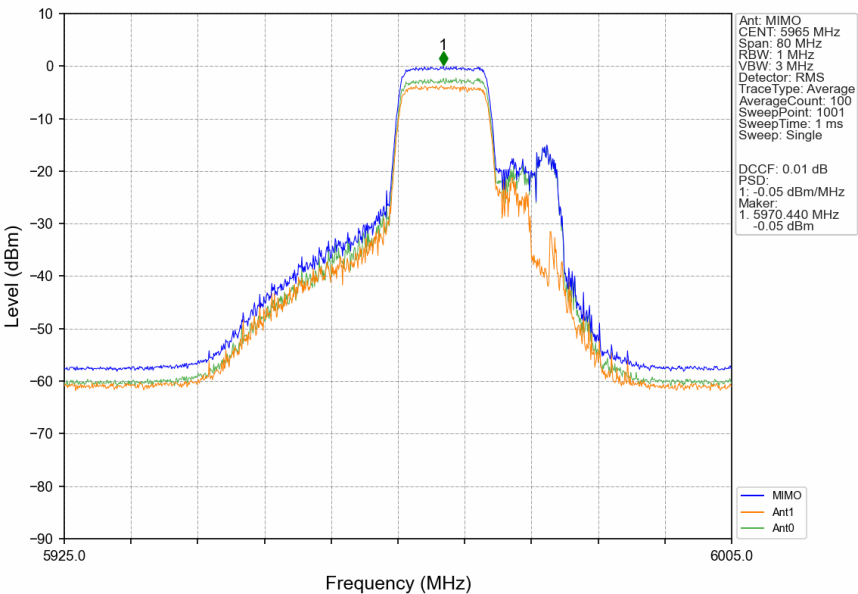


802.11be(EHT40) MCH_6165MHz_RU242_Left_Ant1_NTNV

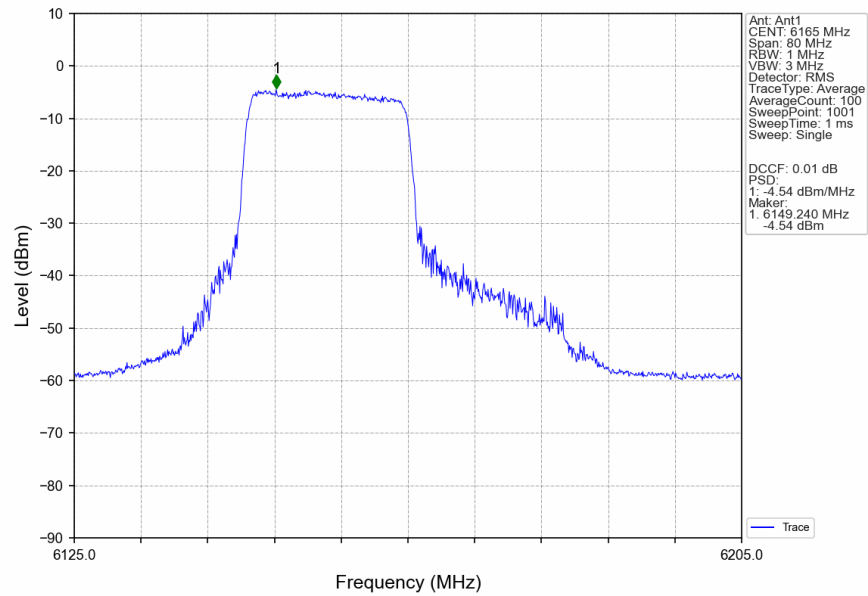

802.11be(EHT40) MCH_6165MHz_RU242_Left_Ant0_NTNV

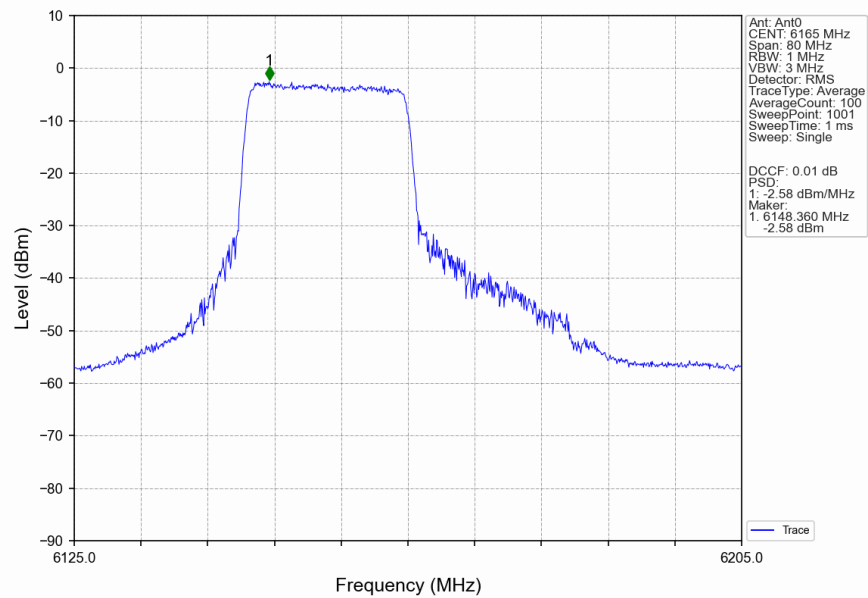

802.11be(EHT40) MCH 6165MHz RU242 Left MIMO NTN

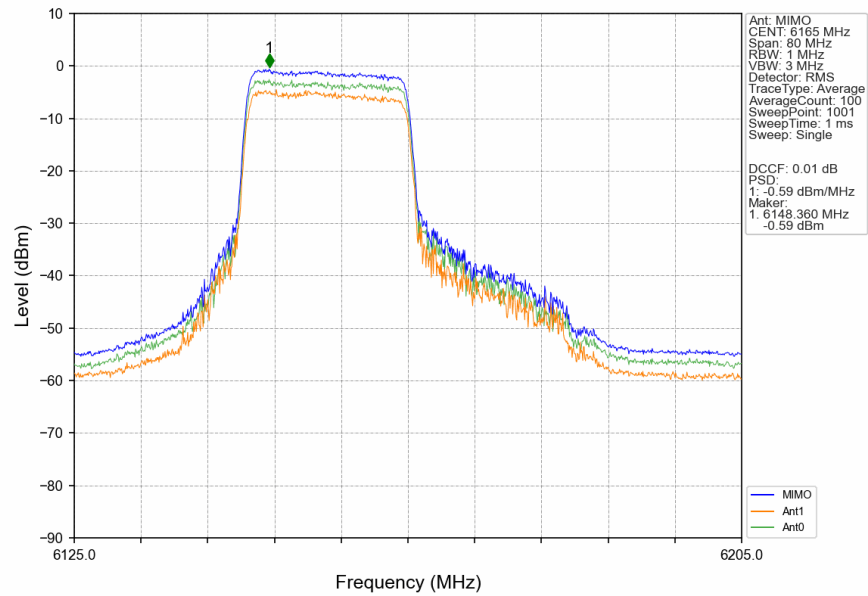

802.11be(EHT40) MCH 6165MHz RU484 Left Ant1 NTN

