



FCC TEST REPORT

FCC ID: 2A30F-BS1

On Behalf of

Shenzhen Pard Technology Co.,Ltd

Digital Night Vision Camera

Model No.:BS1

BS2, BS3, BS4, BS5, BS6, Nocta, NV007V2 Pro, NV007V3, NV007V3 Pro, NV007V4, NV007V4 Pro, NV007V5, NV007V5 Pro, Night Stalker Mini 4K, Night Stalker Mini 5K, Night Stalker 4K 2.0, Night Stalker 4K 3.0, Night Stalker 4K 4.0, Night Stalker 4K 5.0, Night Stalker 5K, Night Stalker 5K 2.0, Night Stalker 5K 3.0, Night Stalker 5K 4.0, Night Stalker 5K 5.0, Night Stalker eX 5K, Night Stalker eX 6K, Night Stalker eX 7K, Night Stalker eX 8K, NV008SP3, NV008SP4, NV008SP5, NV008SP6

Prepared for : Shenzhen Pard Technology Co.,Ltd
Address : B78,18/F,Guangyin building,38 Futian South Road, port community, Futian street, Futian District, Shenzhen, China

Prepared By : Shenzhen PSI Testing Co., Ltd.
Address : 1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Report Number : psi2510121-C01-R01
Date of Receipt : Oct. 14, 2025
Date of Test : Oct. 14, 2025 to Dec. 4, 2025
Date of Report : Dec. 4, 2025
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Summary Of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information	7
2.1. Description of Device (EUT)	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of Connection Between EUT and Simulators	8
2.5. Test Mode Description	9
2.6. Software test version and power setting information	10
2.7. Test Conditions	10
2.8. Test Facility	11
2.9. Measurement Uncertainty	11
2.10. Test Equipment List	12
3. Spurious Emission	13
3.1. Test Limits	13
3.2. Block Diagram of Test setup	16
3.3. Test Procedure	17
3.4. Test Results	17
4. Power Line Conducted Emission	26
4.1. Test Limits	26
4.2. Test Procedure	26
4.3. Test Setup	26
4.4. Test Results	27
5. Out-of-band Emissions	30
5.1. Test Limits	30
5.2. Test Procedure	30
5.3. Test Setup	30
5.4. Test Results	30
6. Conducted Maximum Peak Output Power	53
6.1. Test limits	53
6.2. Test Procedure	53
6.3. Test Setup	53
6.4. Test Results	53
7. Peak Power Spectral Density	54
7.1. Test limits	54
7.2. Test Procedure	54
7.3. Test Setup	54
7.4. Test Results	55
8. Bandwidth	62
8.1. Test limits	62
8.2. Test Procedure	62
8.3. Test Setup	62
8.4. Test Results	62
9. Duty Cycle	76
10. Band Edge Test	83
10.1. Block Diagram of Test Setup	83
10.2. Test Limit	83
10.3. Test Procedure	83
10.4. Test Results	84
11. Frequency stability	88
11.1. Test limit	88
11.2. Test Procedure	88

11.3. Test Setup	88
11.4. Test Results	88
12. Antenna Requirement	89
12.1. Standard Requirement	89
12.2. Antenna Connected Construction	89
12.3. Results	89
13. Photos of test setup	90
14. Photos of EUT	90

TEST REPORT DECLARATION

Applicant : Shenzhen Pard Technology Co., Ltd
 Address : B78,18/F,Guangyin building,38 Futian South Road, port community, Futian street, Futian District, Shenzhen, China
 Manufacturer : Shenzhen Pard Technology Co., Ltd
 Address : B78,18/F,Guangyin building,38 Futian South Road, port community, Futian street, Futian District, Shenzhen, China
 EUT Description : Digital Night Vision Camera

BS1
 BS2, BS3, BS4, BS5, BS6, Nocta, NV007V2 Pro,
 NV007V3, NV007V3 Pro, NV007V4, NV007V4 Pro,
 NV007V5, NV007V5 Pro, Night Stalker Mini 4K,
 Night Stalker Mini 5K, Night Stalker 4K 2.0,
 Night Stalker 4K 3.0, Night Stalker 4K 4.0,
 (A) Model No. : Night Stalker 4K 5.0, Night Stalker 5K,
 Night Stalker 5K 2.0, Night Stalker 5K 3.0,
 Night Stalker 5K 4.0, Night Stalker 5K 5.0,
 Night Stalker eX 5K, Night Stalker eX 6K,
 Night Stalker eX 7K, Night Stalker eX 8K, NV008SP3,
 NV008SP4, NV008SP5, NV008SP6
 (B) Trademark : PARD

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247

ANSI C63.10:2020


Test Result: PASS

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC Part 15C requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....:

Felix Pang
 Test Engineer



Approved by (name + signature).....:

Simple Guan
 Project Manager



Date of issue.....:

Dec. 4, 2025

Revision History

Revision	Issue Date	Revisions	Revised By
V0	Dec. 4, 2025	Initial released Issue	Felix Pang

1. Summary Of Standards And Results

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Conducted Emission	FCC Part 15: 15.207 RSS-GEN(8.8), ANSI C63.10 :2020	P
6dB Bandwidth	FCC PART 15:15.247(a)(2) RSS-247(5.2 a), ANSI C63.10 :2020	P
Output Power	FCC Part 15: 15.247(b)(3) RSS-247(5.4 d), ANSI C63.10 :2020	P
Radiated Spurious Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) RSS-Gen(8.9), RSS-247(5.5) ANSI C63.10 :2020	P
Conducted Spurious & Band Edge Emission	FCC Part 15: 15.247(d) RSS-Gen(8.9), RSS-247(5.5) ANSI C63.10 :2020	P
Power Spectral Density	FCC PART 15:15.247(e) RSS-247(5.2 b), ANSI C63.10 :2020	P
Radiated Band Edge Emission	FCC Part 15: 15.247(d) RSS-GEN(6.13), ANSI C63.10 :2020	P
Frequency stability	RSS-GEN(6.11)	N/A
Antenna Requirement	FCC Part 15: 15.203 RSS-GEN(6.8)	P

Note:

1. P is an abbreviation for Pass.
2. F is an abbreviation for Fail.
3. N/A is an abbreviation for Not Applicable.
4. Conclusion determination rules of this report: Unless there are clear provisions on measurement uncertainty in the standard or customer requirements, decision by actual test data without considering measurement uncertainty.
5. Measurement method usage KDB 558074 D01 15.247 Meas Guidance v05r02.

2. General Information

2.1. Description of Device (EUT)

Product Name	: Digital Night Vision Camera
Model	: BS1
Diff	: BS1 is the test model, while other models are derivative models. These models are the same on the circuit, with only different model names. Therefore, the test data of BS1 can represent the remaining models.
Test Voltage	: Input: DC 5 V or DC 3.7 V powered by battery

Radio technology	: 2.4G WiFi
Operation frequency	: 2412MHz-2462MHz for IEEE 802.11 b, g, n/HT20, n/HT40 2422MHz-2452MHz for IEEE 802.11n/HT40
Channel No.	: 802.11b/802.11g/802.11n(HT20): 11CH 802.11n(HT40): 7CH
Modulation type	: IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM(64QAM, 16QAM, QPSK, BPSK)
Antenna Type	: FPC antenna, maximum gain is 1.5dBi
PMN	: N/A
HVIN	: N/A
Software version	: V1.0
Hardware version/FVIN	: V1.0
Note	: Antenna information is provided by applicant. Testing lab is not responsible for the accuracy of the information.

2.2. Accessories of Device (EUT)

Accessories 1 : /

Manufacturer : /

Model : /


Rating : /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number
1	Adapter	Xiaomi	MDY-08-EH	/
2	Laptop	Lenovo (Beijing) Co., Ltd	ThinkPad E480	/
3	USB serial port board	/	/	/

2.4. Block Diagram of Connection Between EUT and Simulators

Conducted Emissions




Radiated Emission(30MHz-1GHz)



Radiated Emission(above 1GHz)



RF Conducted test



2.5. Test Mode Description

Keeping TX

Mode	Data rate (Mbps)	Channel	Frequency(MHz)
IEEE 802.11 b	1	Low :CH1	2412
	1	Middle: CH6	2437
	1	High: CH11	2462
IEEE 802.11 g	6	Low :CH1	2412
	6	Middle: CH6	2437
	6	High: CH11	2462
IEEE 802.11 n/HT20	6.5	Low :CH1	2412
	6.5	Middle: CH6	2437
	6.5	High: CH11	2462
IEEE 802.11 n/HT40	13.5	Low :CH1	2422
	13.5	Middle:CH4	2437
	13.5	High:CH7	2452

Note: According exploratory test, EUT will have maximum output power in those data rate. So those data rate were used for all test.

Channel list:

For IEEE 802.11b, g, n/HT20

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH1	2412	CH5	2432	CH9	2452
CH2	2417	CH6	2437	CH10	2457
CH3	2422	CH7	2442	CH11	2462
CH4	2427	CH8	2447		

For IEEE 802.11 n/HT40

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH1	2422	CH5	2442		
CH2	2427	CH6	2447		
CH3	2432	CH7	2452		
CH4	2437				

2.6. Software test version and power setting information

Software testing version	Adb_tool		
Mode	The client 's preset testing software is used to control the operation of EUT in continuous transmission mode and select the testing channel, wireless mode:		
Power level setup by client			
Mode	Channel	Frequency (MHz)	Soft Set
IEEE 802.11b/g/n20	Low :CH1	2412	TX level is set as defaults value.
	Middle: CH6	2437	TX level is set as defaults value.
	High: CH11	2462	TX level is set as defaults value.
IEEE 802.11n40	Low :CH1	2422	TX level is set as defaults value.
	Middle:CH4	2437	TX level is set as defaults value.
	High:CH7	2452	TX level is set as defaults value.

2.7. Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	26℃
Humidity range:	25-75%	54%
Pressure range:	86-106kPa	101kPa

2.8. Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission

Registration Number: 916281

2.9. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Power Line Conducted Emissions Test	2.13dB
Radiation Emission test in 3m chamber(Below 30MHz)	4.07dB
Radiation Emission test in 3m chamber(30MHz to 1GHz)	4.51dB
Radiation Emission test in 3m chamber(1GHz to 18GHz)	5.07dB
Radiation Emission test in 3m chamber(18GHz to 40GHz)	5.21dB
Radio Frequency	48.24KHz
Conducted RF Power	0.41dB
Power Spectral Density	0.39 dB
Occupied-Bandwidth	968Hz
Duty Cycle	1%
Conducted-Spurious Emission	1.26dB

2.10. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2022.12.20	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2024.12.18	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV216	102282	/	2024.12.18	1 Year
4.	L.I.S.N.#2	RFT	NNB111	13835240	/	2024.12.18	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2025.01.02	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2025.01.02	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101648	3.70	2024.12.18	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2025.01.02	2 Year
9.	Amplifier	SKET	LAPA_01G18 G-45dB	SK202203290 1	/	2024.12.18	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2024.12.31	2 Year
11.	Amplifier	SKET	LNPA_0118G -45	SK202001080 1	/	2024.12.18	1 Year
12.	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.02- 1111533-Fz	/	2024.12.18	1 Year
13.	RF Sensor Unit	Tachoy	TR1029-2	20220428P00 8	/	2024.12.18	1 Year
14.	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2024.12.18	1 Year
15.	Temp. & Humid Chamber	Auchno	9606	/	/	2024.12.18	1 Year
16.	Regulated DC Power Supply	Xinouhua	ADC120V10 A	202211251638	/	2024.12.18	1 Year
17.	Cable	SKET	Cable-RE-1	#02/#03	/	2024.12.18	1 Year
18.	Cable	SKET	Cable-RE-2	#01	/	2024.12.18	1 Year
19.	Cable	SKET	Cable-RE-3	#04	/	2024.12.18	1 Year
20.	Cable	SKET	Cable-CE-1	A-E-24	/	2024.12.18	1 Year
21.	6dB Attenuator	Schwarzbeck	DGA 9552N 6dB	CK4186	/	2024.12.18	1 Year
22.	Power meter	Agilent	E4419B	GB40202121	/	2024.12.18	1 Year
For Test Software Information							
Item	Software Name	Manufacturer			Version		
RE	EZ EMC	Farad			PSI-3A1		
CE	EZ EMC	Farad			PSI-3A1		
RF	RTS	TACHOY			V1.0.0		

3. Spurious Emission

3.1. Test Limits

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

RSS-GEN Restricted frequency band

Table 7 – Restricted frequency bands^{Note 1}

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 – 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0

6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 – 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 – 8500	
108 – 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSS.

15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009-0.490	300	$2400/\text{F}(\text{KHz})$	/
0.490-1.705	30	$24000/\text{F}(\text{KHz})$	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: The peak limit is 20 dB higher than the average limit

Table 5 – General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$ at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500


Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) ($\mu\text{A}/\text{m}$)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	$6.37/\text{F}$ (F in kHz)	300
490 - 1705 kHz	$63.7/\text{F}$ (F in kHz)	30
1.705 - 30 MHz	0.08	30


Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

3.2. Block Diagram of Test setup


3.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

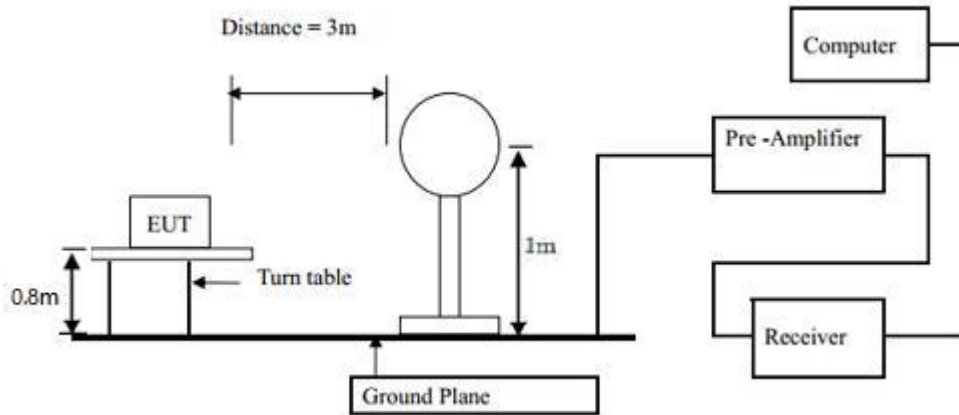

3.2.2 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

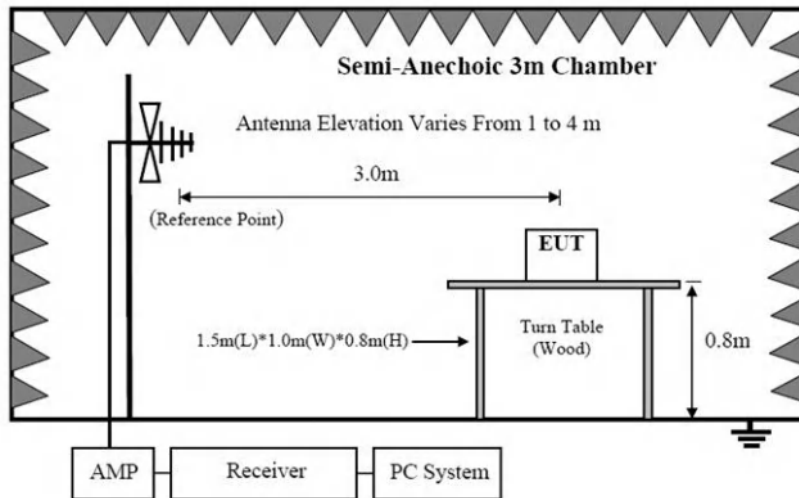

3.2.3 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

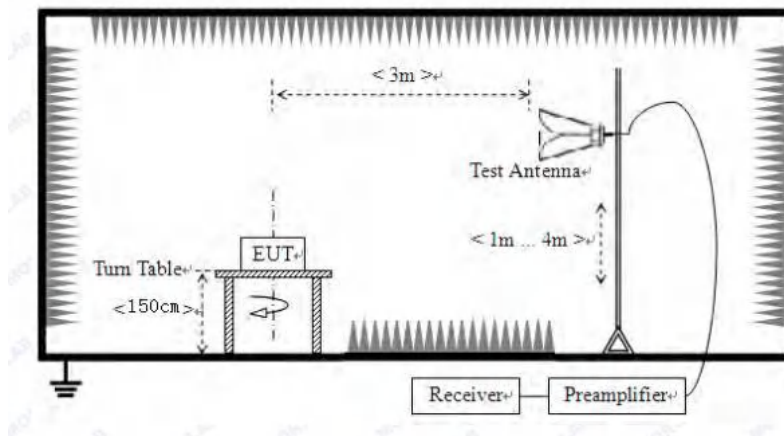

3.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2020 on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.


Test setup information:

9KHz~150KHz	RBW200Hz	VBW1KHz
150KHz~30MHz	RBW9KHz	VBW 30KHz
30MHZ~1GHz	RBW120KHz	VBW 300KHz
Above1GHz	RBW1MHz	VBW 3MHz

3.4. Test Results

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


From 30MHz to 1000MHz:	
Test Date : 2025.10.16	Temperature : 23.6℃
Test Engineer : Felix Pang	Humidity : 55.6%
Test Mode : 802.11n40 mode	
Test Results : PASS	
Note:	1. The test results are listed in next pages. 2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. 3. All modes have been tested, and only worst data of IEEE 802.11n40 mode, Channel 2452MHz was listed in this report.

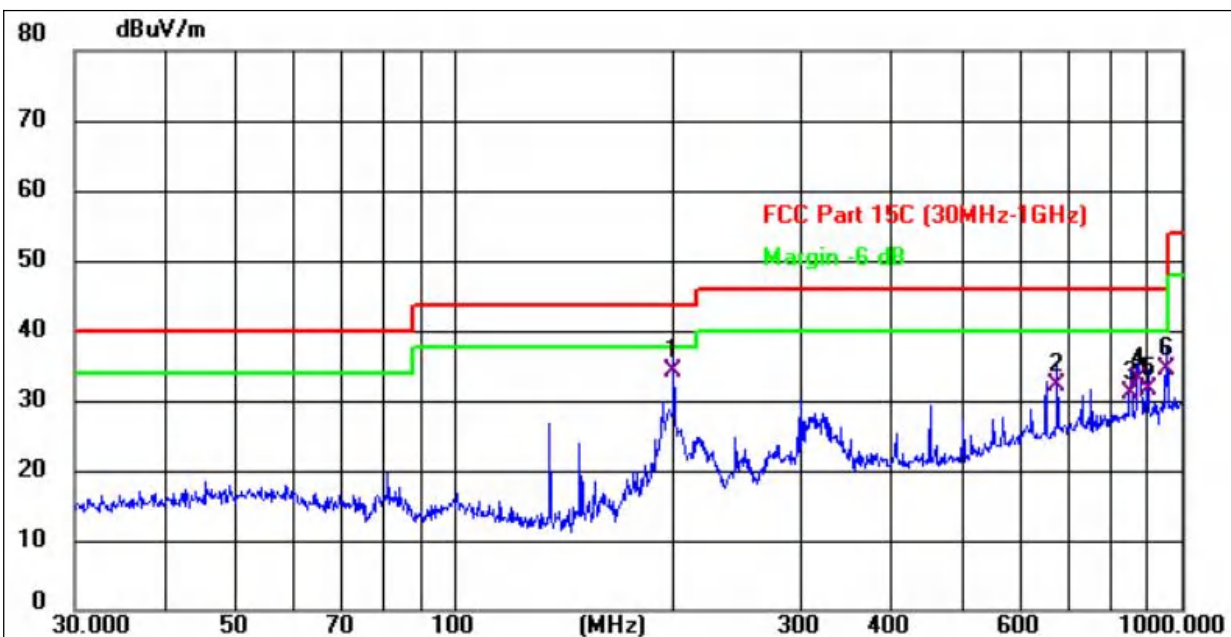Polarization: Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1 *	199.9855	44.12	-9.99	34.13	43.50	-9.37	QP	-	-	P
2	675.2080	32.24	0.03	32.27	46.00	-13.73	QP	-	-	P
3	851.0353	28.35	2.70	31.05	46.00	-14.95	QP	-	-	P
4	872.1832	29.85	3.03	32.88	46.00	-13.12	QP	-	-	P
5	900.1473	28.09	3.45	31.54	46.00	-14.46	QP	-	-	P
6	952.0937	30.52	3.97	34.49	46.00	-11.51	QP	-	-	P

Note: 1. Level = Reading + Factor Margin = Level - Limit

2. Means the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

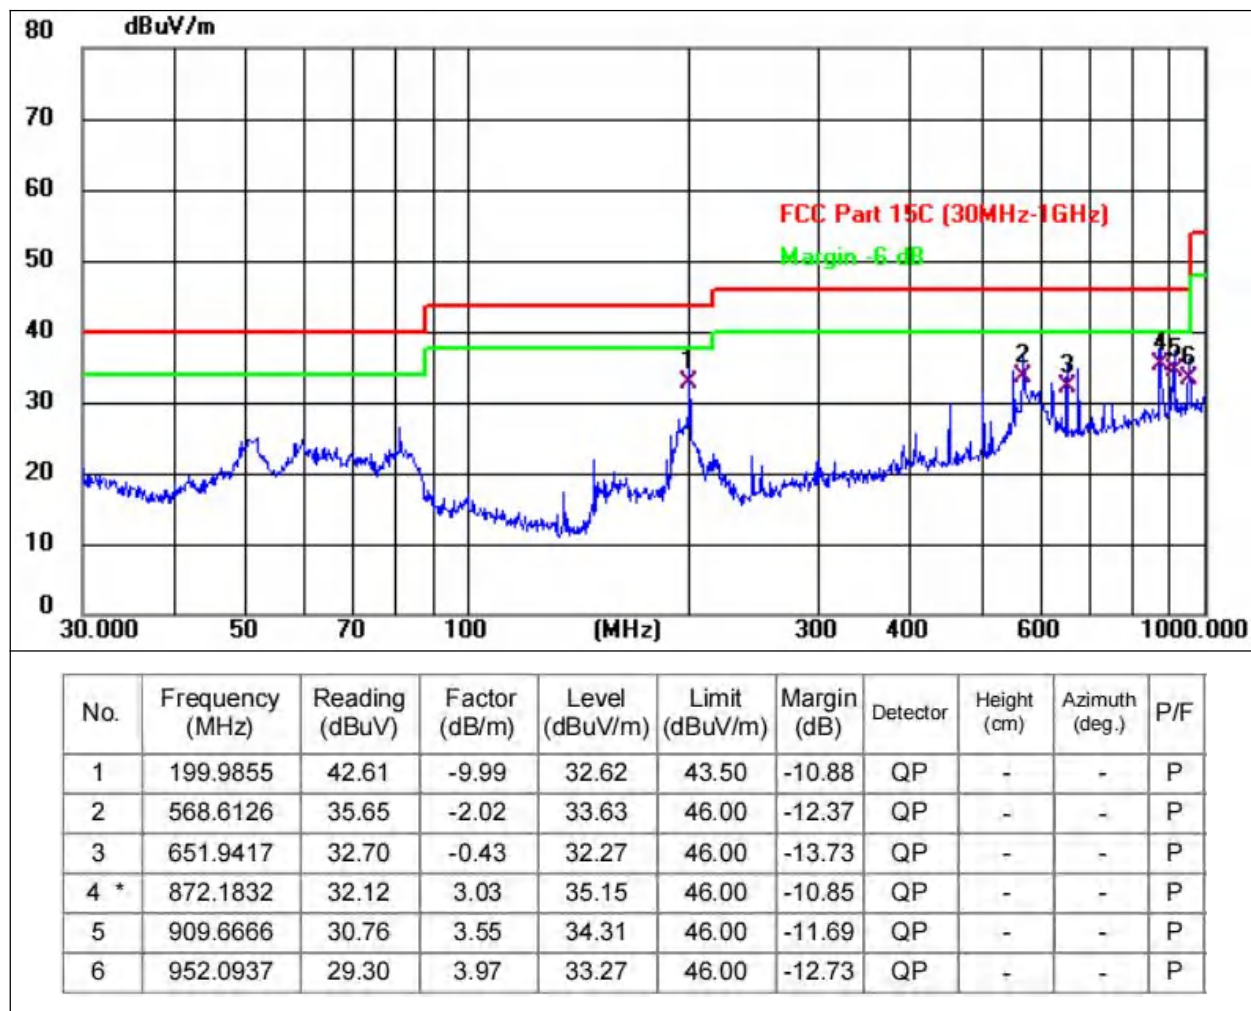Polarization: Vertical

Note: 1. Level = Reading + Factor Margin = Level - Limit

2. '-' Means the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

From 1GHz to 25GHz:	
Test Date : 2025.10.17	Temperature : 24.2℃
Test Engineer : Felix Pang	Humidity : 54.3%
Test Mode : 802.11b, 802.11g, 802.11n20, 802.11n40	
Test Results : PASS	
Note:	1. The test results are listed in next pages. 2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. 3. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.

Test Mode : IEEE 802.11b TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4824	V	57.29	-13.25	44.04	74	-29.96	Peak
2	4824	V	47.42	-13.25	34.17	54	-19.83	Avg
3	7236	--	--	--	--	--	--	--
4	9648	--	--	--	--	--	--	--
5	4824	H	57.49	-13.25	44.24	74	-29.76	Peak
6	4824	H	48.31	-13.25	35.06	54	-18.94	Avg
7	7236	--	--	--	--	--	--	--
8	9648	--	--	--	--	--	--	--
Test Mode : IEEE 802.11b TX Mid								
1	4874	V	59.37	-12.98	46.39	74	-27.61	Peak
2	4874	V	48.78	-12.98	35.8	54	-18.2	Avg
3	7311	--	--	--	--	--	--	--
4	9748	--	--	--	--	--	--	--
5	4874	H	59.71	-12.98	46.73	74	-27.27	Peak
6	4874	H	47.34	-12.98	34.36	54	-19.64	Avg
7	7311	--	--	--	--	--	--	--
8	9748	--	--	--	--	--	--	--
Test Mode : IEEE 802.11b TX High								
1	4924	V	59.28	-12.7	46.58	74	-27.42	Peak
2	4924	V	48.6	-12.7	35.9	54	-18.1	Avg
3	7386	--	--	--	--	--	--	--
4	9848	--	--	--	--	--	--	--
5	4924	H	57.66	-12.7	44.96	74	-29.04	Peak
6	4924	H	47.89	-12.7	35.19	54	-18.81	Avg
7	7386	--	--	--	--	--	--	--
8	9848	--	--	--	--	--	--	--
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.								

Test Mode : IEEE 802.11g TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4824	V	59.84	-13.25	46.59	74	-27.41	Peak
2	4824	V	47.65	-13.25	34.4	54	-19.6	Avg
3	7236	--	--	--	--	--	--	--
4	9648	--	--	--	--	--	--	--
5	4824	H	59.47	-13.25	46.22	74	-27.78	Peak
6	4824	H	47.23	-13.25	33.98	54	-20.02	Avg
7	7236	--	--	--	--	--	--	--
8	9648	--	--	--	--	--	--	--
Test Mode : IEEE 802.11g TX Mid								
1	4874	V	59.28	-12.98	46.3	74	-27.7	Peak
2	4874	V	47.26	-12.98	34.28	54	-19.72	Avg
3	7311	--	--	--	--	--	--	--
4	9748	--	--	--	--	--	--	--
5	4874	H	57.85	-12.98	44.87	74	-29.13	Peak
6	4874	H	48.08	-12.98	35.1	54	-18.9	Avg
7	7311	--	--	--	--	--	--	--
8	9748	--	--	--	--	--	--	--
Test Mode : IEEE 802.11g TX High								
1	4924	V	59.29	-12.7	46.59	74	-27.41	Peak
2	4924	V	47.07	-12.7	34.37	54	-19.63	Avg
3	7386	--	--	--	--	--	--	--
4	9848	--	--	--	--	--	--	--
5	4924	H	57.6	-12.7	44.9	74	-29.1	Peak
6	4924	H	48.99	-12.7	36.29	54	-17.71	Avg
7	7386	--	--	--	--	--	--	--
8	9848	--	--	--	--	--	--	--
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.								

Test Mode : IEEE 802.11n/HT20 TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4824	V	59.27	-13.25	46.02	74	-27.98	Peak
2	4824	V	48.83	-13.25	35.58	54	-18.42	Avg
3	7236	--	--	--	--	--	--	--
4	9648	--	--	--	--	--	--	--
5	4824	H	58.88	-13.25	45.63	74	-28.37	Peak
6	4824	H	48.05	-13.25	34.8	54	-19.2	Avg
7	7236	--	--	--	--	--	--	--
8	9648	--	--	--	--	--	--	--
Test Mode : IEEE 802.11n/HT20 TX Mid								
1	4874	V	58.37	-12.98	45.39	74	-28.61	Peak
2	4874	V	47.85	-12.98	34.87	54	-19.13	Avg
3	7311	--	--	--	--	--	--	--
4	9748	--	--	--	--	--	--	--
5	4874	H	59.29	-12.98	46.31	74	-27.69	Peak
6	4874	H	48.49	-12.98	35.51	54	-18.49	Avg
7	7311	--	--	--	--	--	--	--
8	9748	--	--	--	--	--	--	--
Test Mode : IEEE 802.11n/HT20 TX High								
1	4924	V	58.48	-12.7	45.78	74	-28.22	Peak
2	4924	V	47.8	-12.7	35.1	54	-18.9	Avg
3	7386	--	--	--	--	--	--	--
4	9848	--	--	--	--	--	--	--
5	4924	H	57.37	-12.7	44.67	74	-29.33	Peak
6	4924	H	48.46	-12.7	35.76	54	-18.24	Avg
7	7386	--	--	--	--	--	--	--
8	9848	--	--	--	--	--	--	--
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit.								

Test Mode : IEEE 802.11n/HT40 TX Low								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	4844	V	57.39	-13.25	44.14	74	-29.86	Peak
2	4844	V	47.33	-13.25	34.08	54	-19.92	Avg
3	7266	--	--	--	--	--	--	--
4	9688	--	--	--	--	--	--	--
5	4844	H	59.85	-13.25	46.6	74	-27.4	Peak
6	4844	H	48.71	-13.25	35.46	54	-18.54	Avg
7	7266	--	--	--	--	--	--	--
8	9688	--	--	--	--	--	--	--
Test Mode : IEEE 802.11n/HT40 TX Mid								
1	4874	V	59.54	-12.98	46.56	74	-27.44	Peak
2	4874	V	48.39	-12.98	35.41	54	-18.59	Avg
3	7311	--	--	--	--	--	--	--
4	9748	--	--	--	--	--	--	--
5	4874	H	58.72	-12.98	45.74	74	-28.26	Peak
6	4874	H	47.58	-12.98	34.6	54	-19.4	Avg
7	7311	--	--	--	--	--	--	--
8	9748	--	--	--	--	--	--	--
Test Mode : IEEE 802.11n/HT40 TX High								
1	4904	V	57.7	-12.7	45	74	-29	Peak
2	4904	V	47.79	-12.7	35.09	54	-18.91	Avg
3	7356	--	--	--	--	--	--	--
4	9808	--	--	--	--	--	--	--
5	4904	H	57.24	-12.7	44.54	74	-29.46	Peak
6	4904	H	47.07	-12.7	34.37	54	-19.63	Avg
7	7356	--	--	--	--	--	--	--
8	9808	--	--	--	--	--	--	--
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor, Margin= Result-Limit.								

4. Power Line Conducted Emission

4.1. Test Limits

Frequency (MHz)	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.


3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2020 on Conducted Emission Measurement.

The bandwidth of test receiver is set at 9 kHz.

4.3. Test Setup

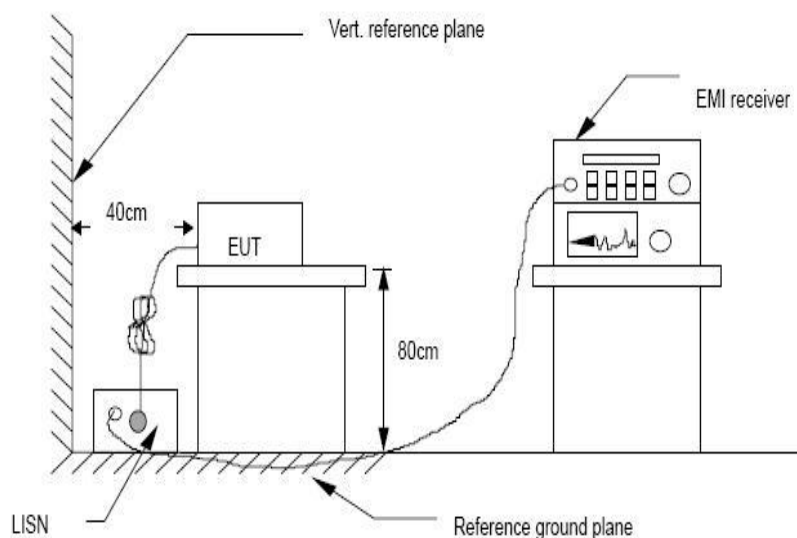


4.4. Test Results

Test Date	: 2025.10.17	Temperature	: 24.2℃
Test Engineer	: Felix Pang	Humidity	: 54.3%
Test Mode	: 802.11n40 mode		
Test Results	: PASS		

Note: 1. The test results are listed in next pages.

2. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out.
3. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.
4. All modes have been tested, and only worst data of n40 mode, Channel 2452MHz (AC 120V/ 60Hz) was listed in this report.


Polarization: L

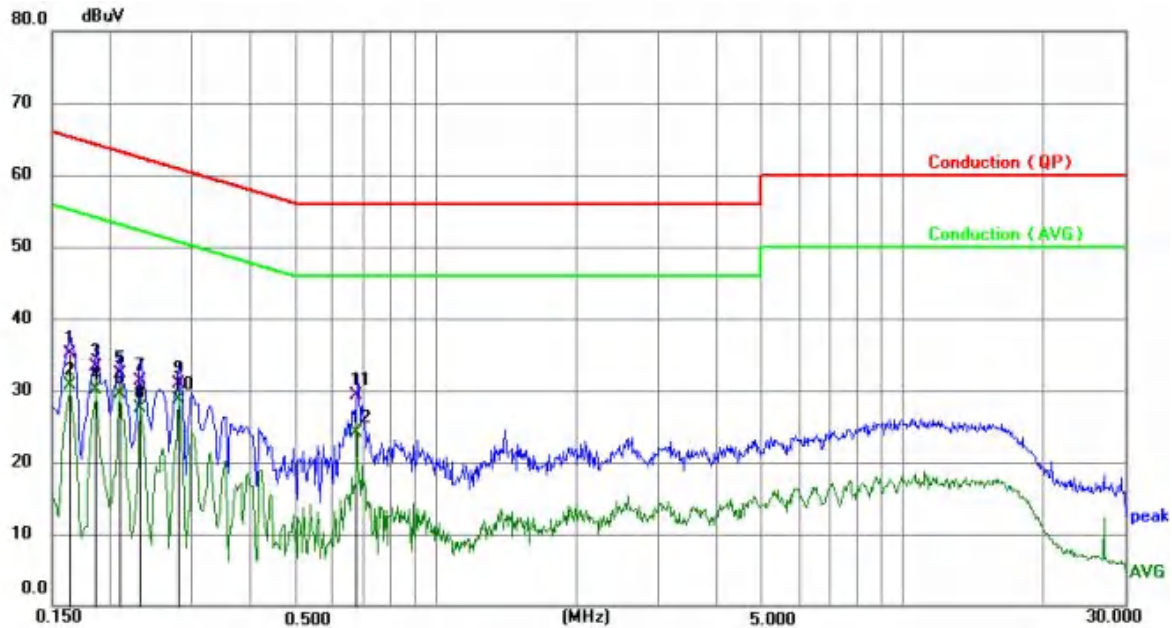

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1641	25.11	9.90	35.01	65.25	-30.24	QP	P	
2	0.1641	20.77	9.90	30.67	55.25	-24.58	AVG	P	
3	0.1863	23.45	9.90	33.35	64.20	-30.85	QP	P	
4	0.1863	20.27	9.90	30.17	54.20	-24.03	AVG	P	
5	0.2094	22.37	9.91	32.28	63.23	-30.95	QP	P	
6	0.2094	19.64	9.91	29.55	53.23	-23.68	AVG	P	
7	0.2316	21.42	9.92	31.34	62.39	-31.05	QP	P	
8	0.2316	17.53	9.92	27.45	52.39	-24.94	AVG	P	
9	0.2802	20.99	9.94	30.93	60.81	-29.88	QP	P	
10	0.2802	18.77	9.94	28.71	50.81	-22.10	AVG	P	
11	0.6753	19.20	10.03	29.23	56.00	-26.77	QP	P	
12 *	0.6753	14.16	10.03	24.19	46.00	-21.81	AVG	P	

Note: Level = Reading + Factor Margin = Level - Limit

Polarization: N

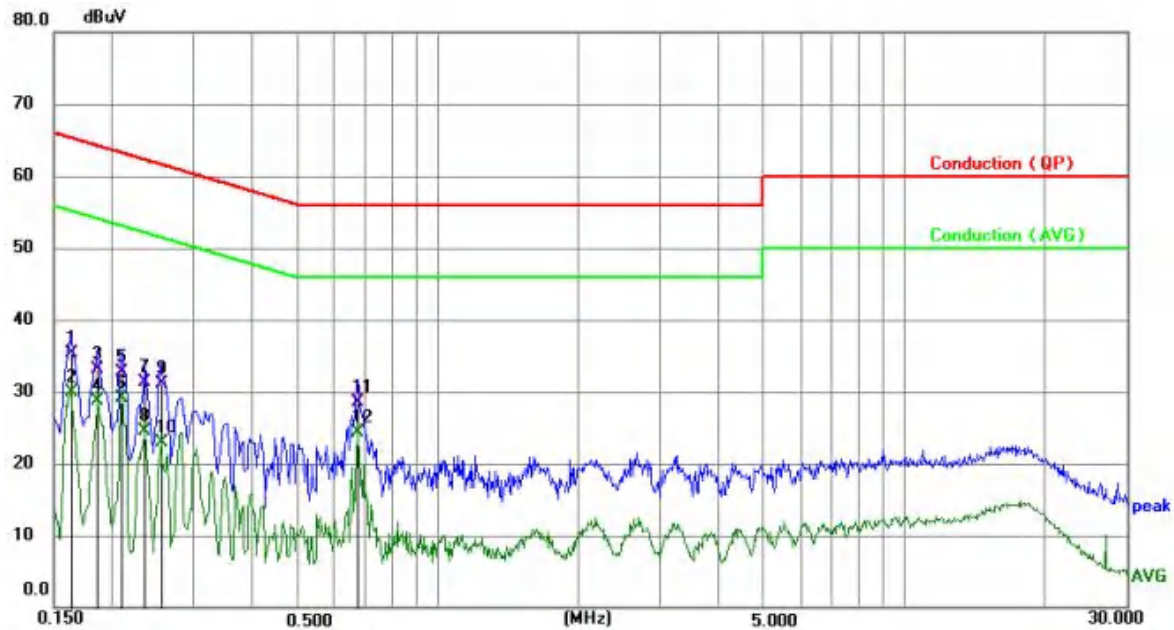

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1632	25.32	9.90	35.22	65.30	-30.08	QP	P	
2	0.1632	20.08	9.90	29.98	55.30	-25.32	AVG	P	
3	0.1863	23.29	9.90	33.19	64.20	-31.01	QP	P	
4	0.1863	18.71	9.90	28.61	54.20	-25.59	AVG	P	
5	0.2094	22.74	9.91	32.65	63.23	-30.58	QP	P	
6	0.2094	19.10	9.91	29.01	53.23	-24.22	AVG	P	
7	0.2353	21.41	9.92	31.33	62.26	-30.93	QP	P	
8	0.2353	14.68	9.92	24.60	52.26	-27.66	AVG	P	
9	0.2547	21.20	9.93	31.13	61.60	-30.47	QP	P	
10	0.2547	13.00	9.93	22.93	51.60	-28.67	AVG	P	
11	0.6718	18.52	10.03	28.55	56.00	-27.45	QP	P	
12 *	0.6718	14.23	10.03	24.26	46.00	-21.74	AVG	P	

Note: Level = Reading + Factor Margin = Level - Limit

5. Out-of-band Emissions


5.1. Test Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in FCC Part 15.209(a) is not required. Please refer section RSS-GEN&15.247.

5.2. Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

5.3. Test Setup



5.4. Test Results

PASS.

The test results are listed in next pages.

Band Edge: Pass


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-44.76	-20	Pass
NVNT	b	2462	Ant1	-57	-20	Pass
NVNT	g	2412	Ant1	-37.94	-20	Pass
NVNT	g	2462	Ant1	-47.11	-20	Pass
NVNT	n20	2412	Ant1	-36.57	-20	Pass
NVNT	n20	2462	Ant1	-45.51	-20	Pass
NVNT	n40	2422	Ant1	-35.81	-20	Pass
NVNT	n40	2452	Ant1	-36.12	-20	Pass



Test Graphs


Band Edge NVNT b 2412MHz Ant1 Ref





Band Edge NVNT b 2412MHz Ant1 Emission

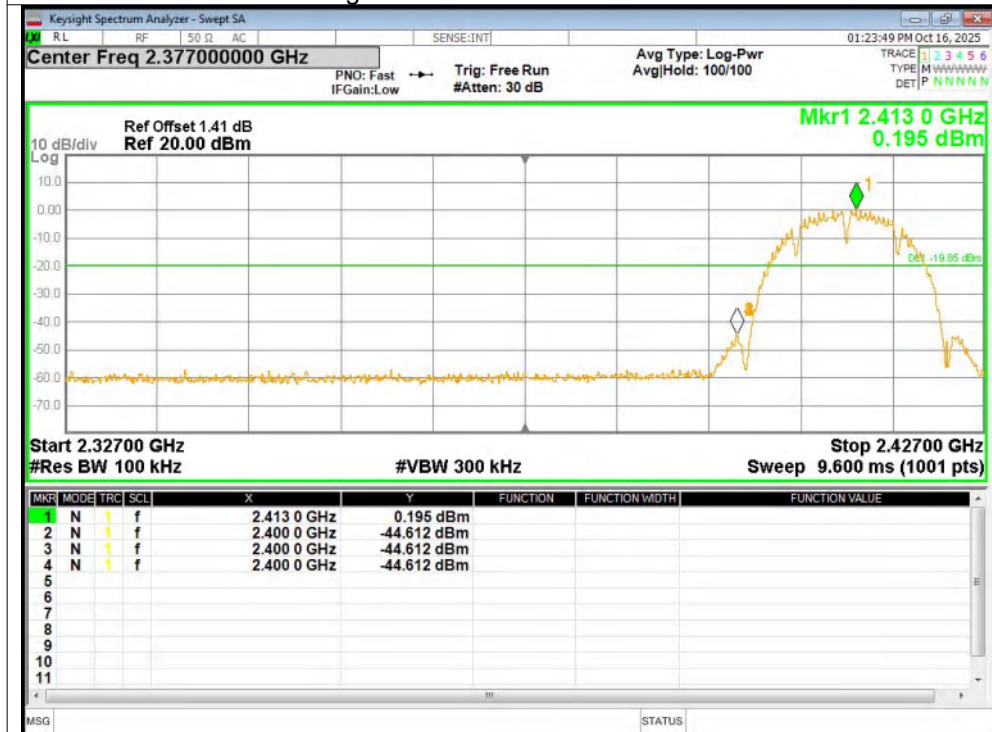


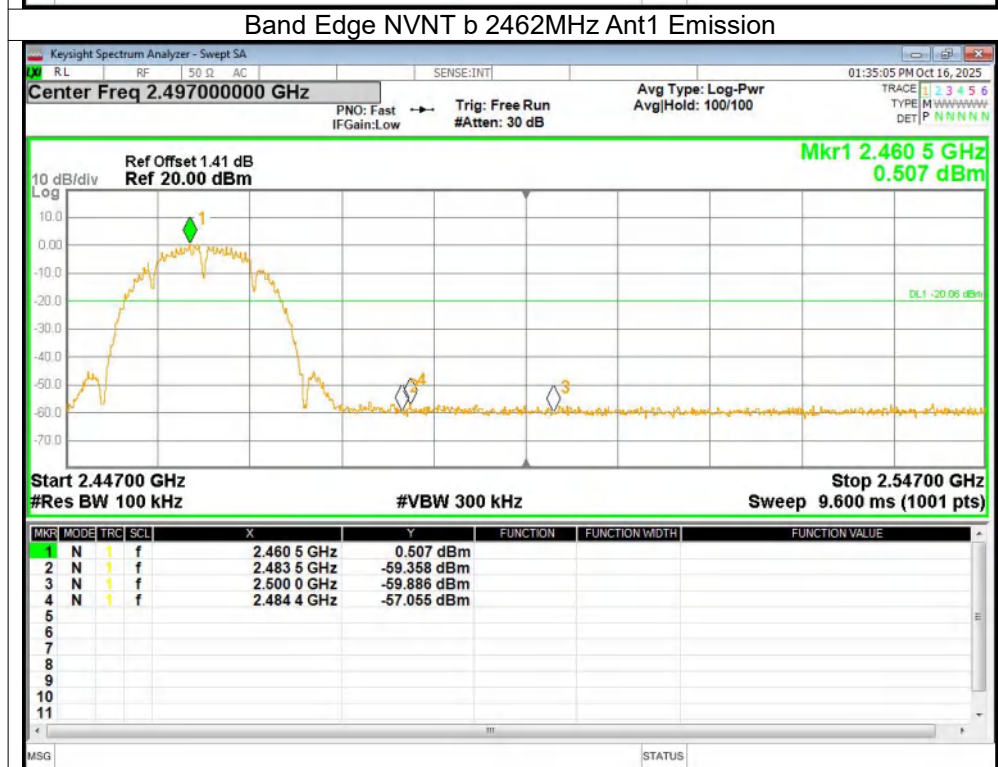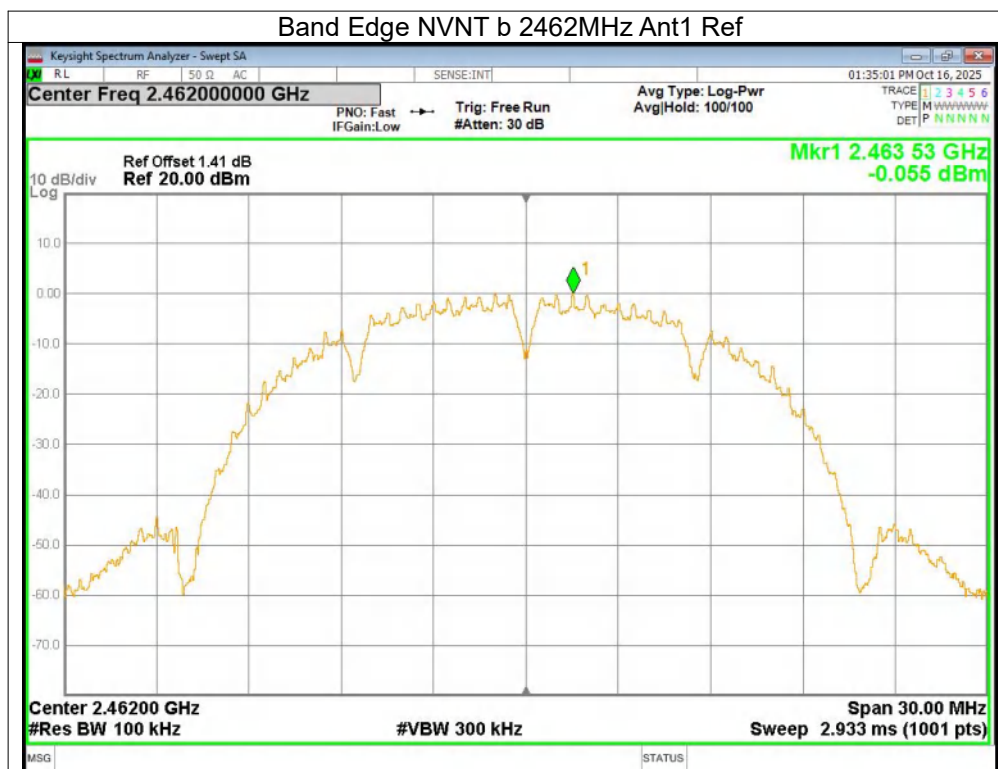


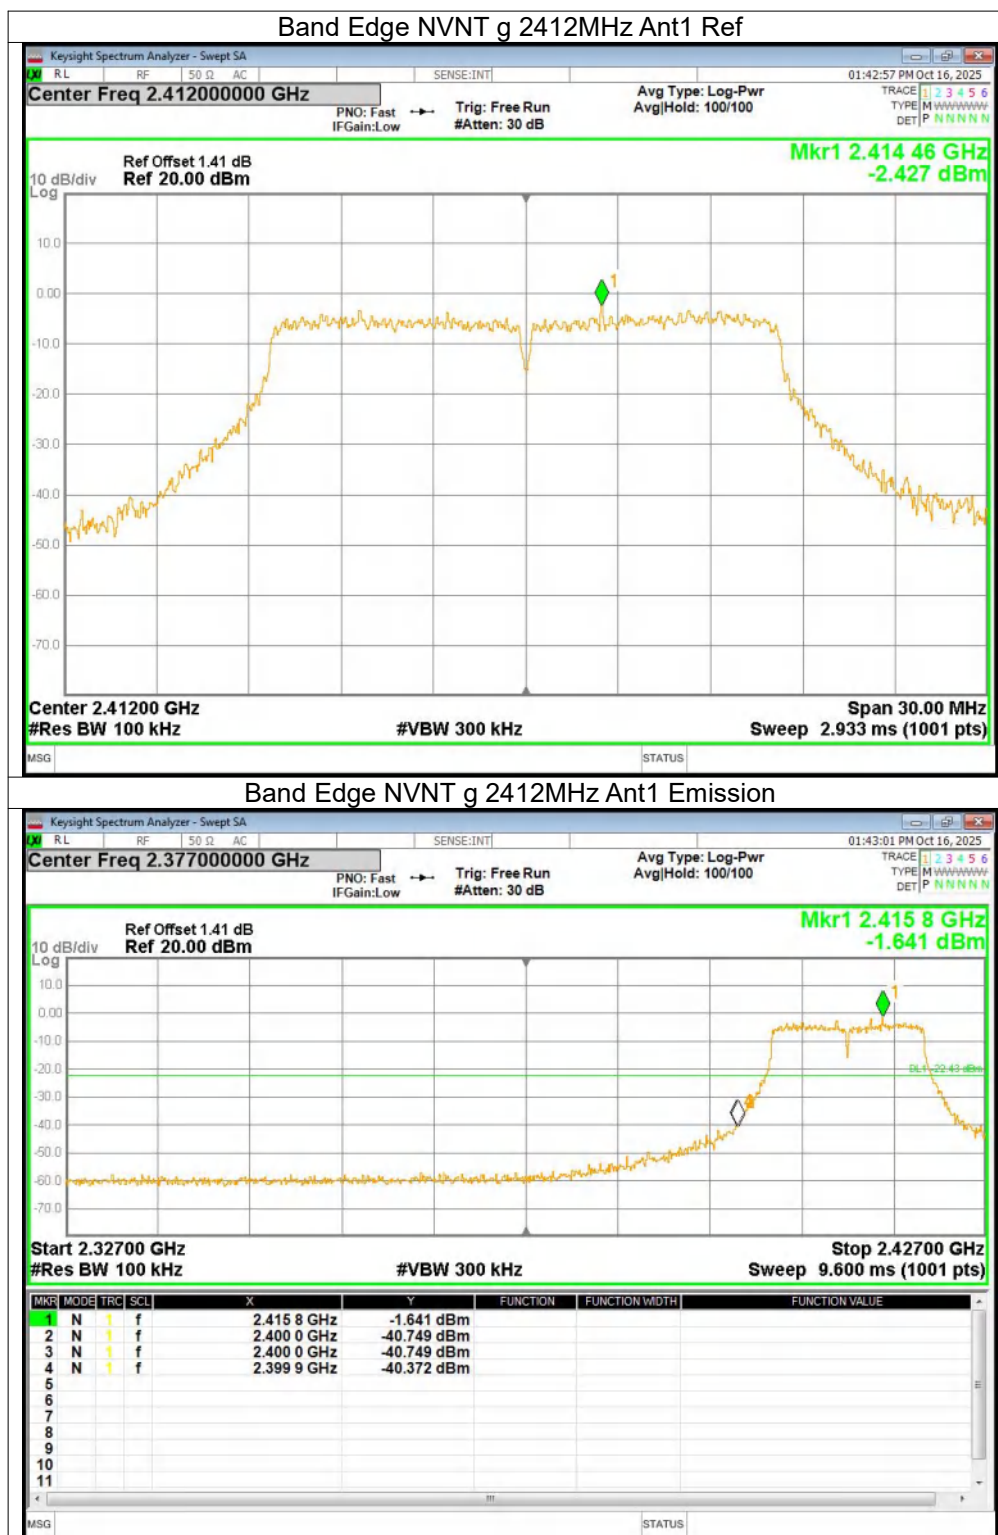


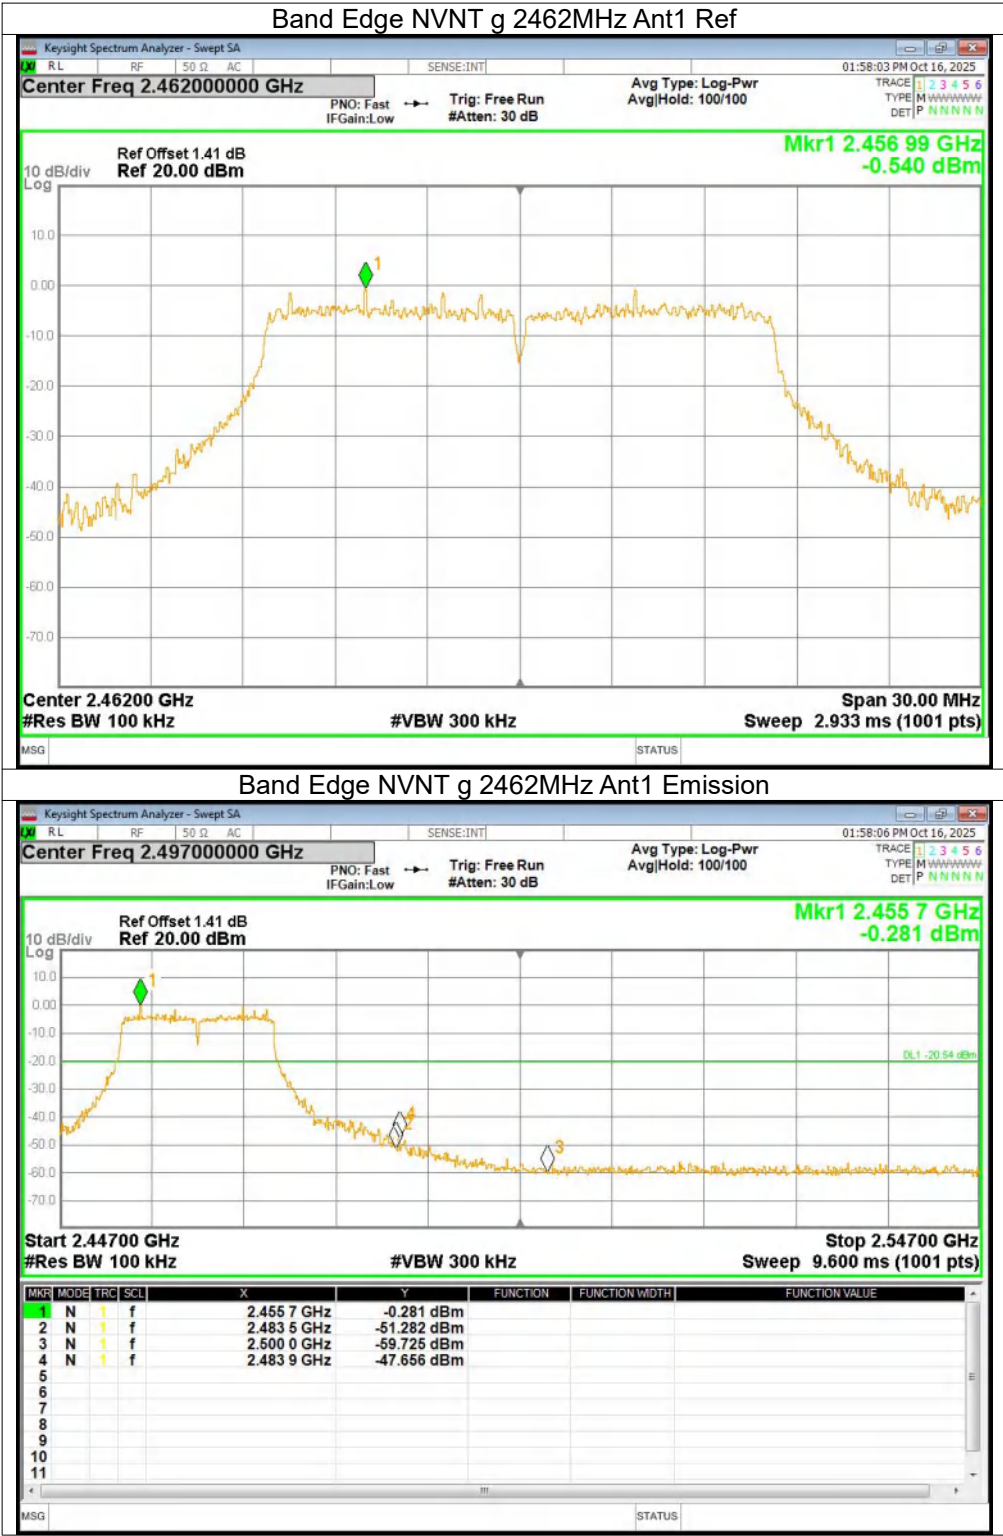

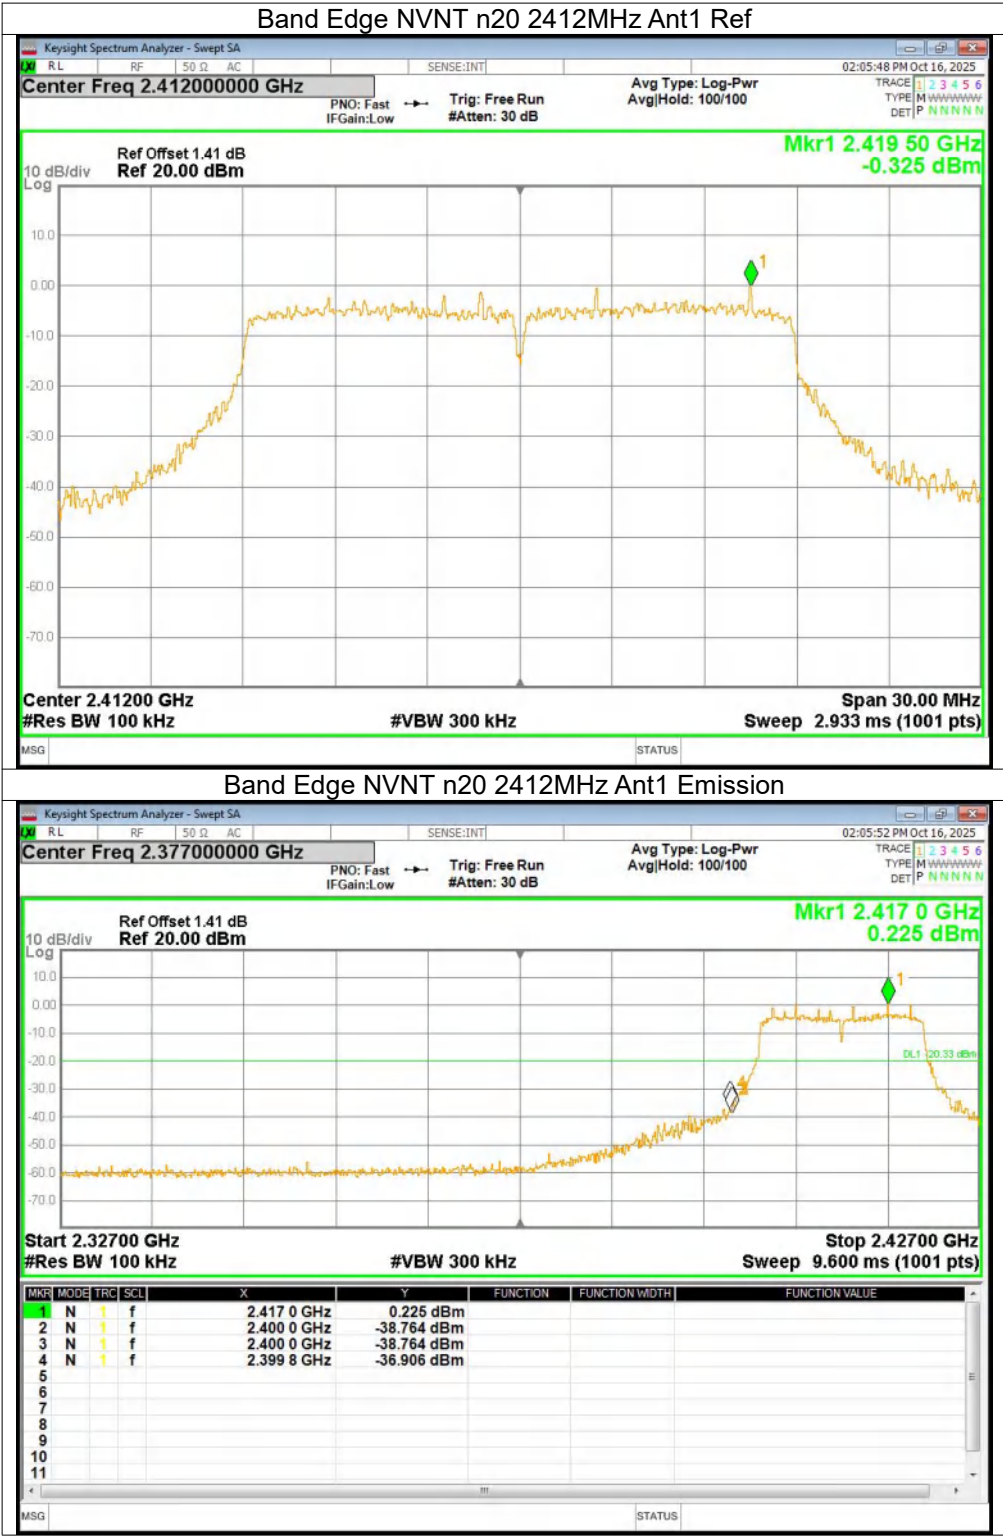

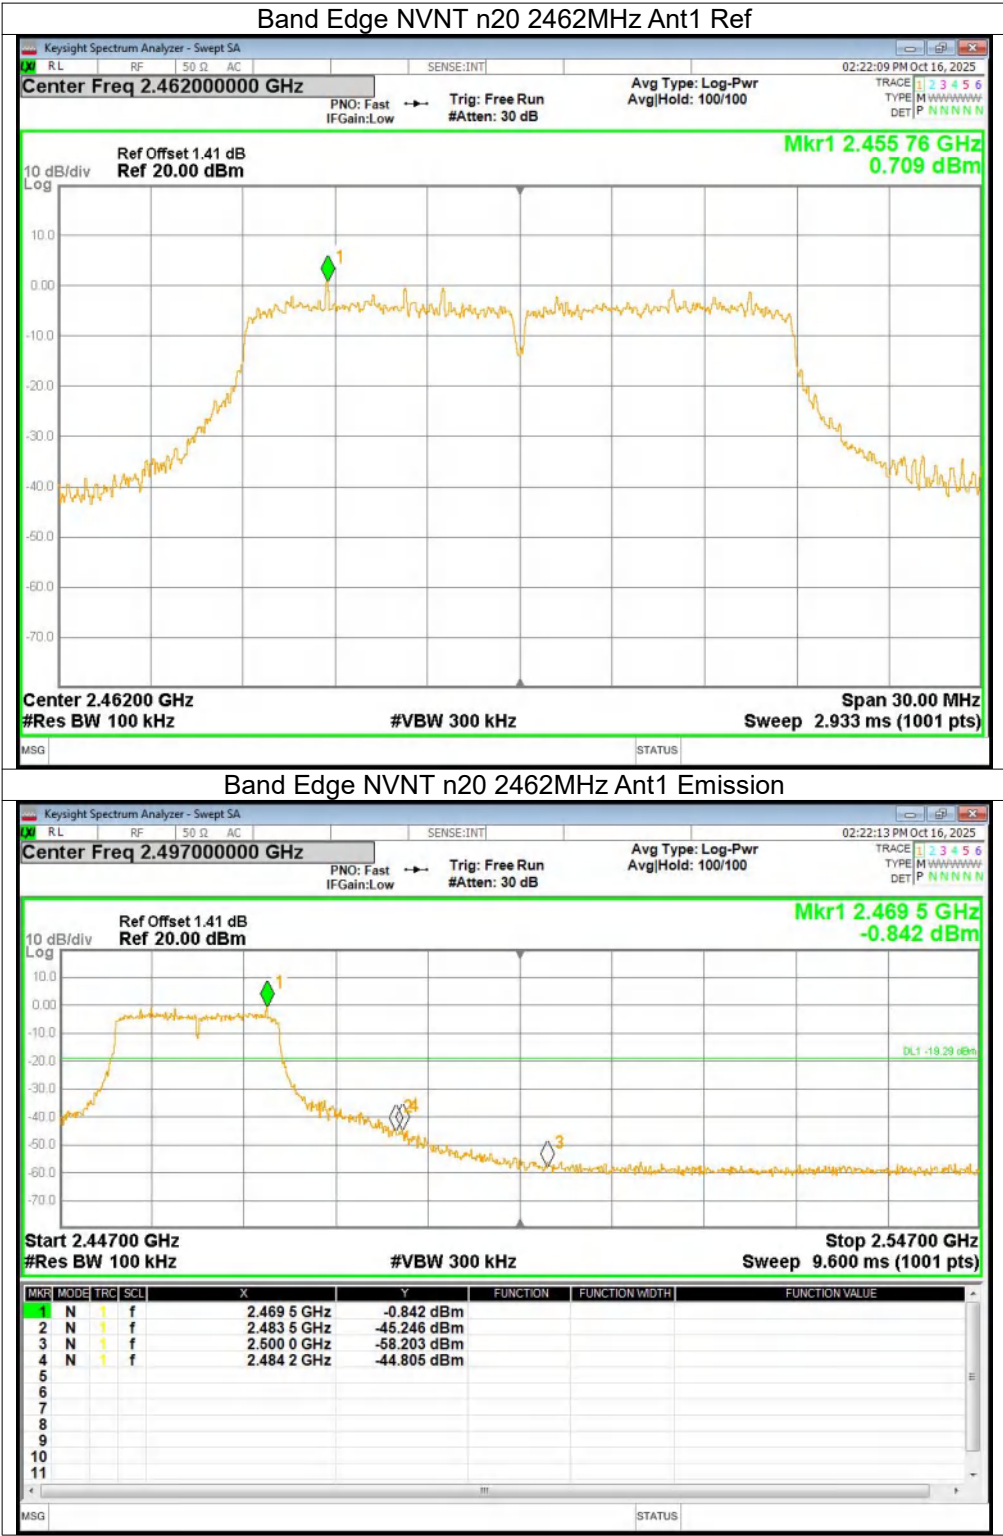

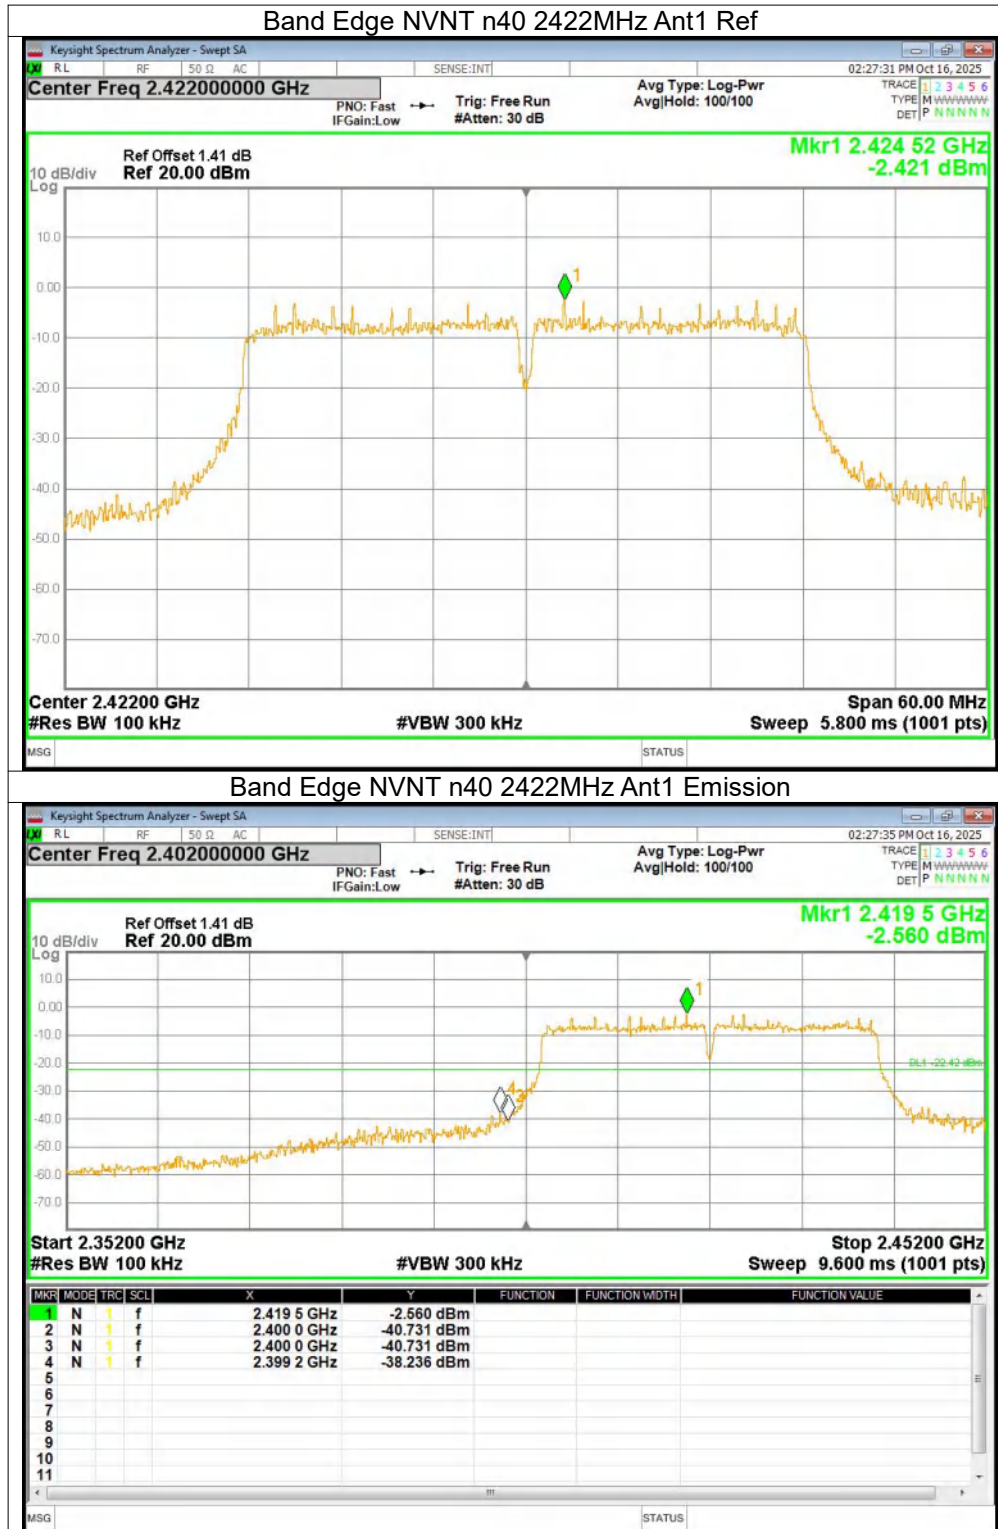

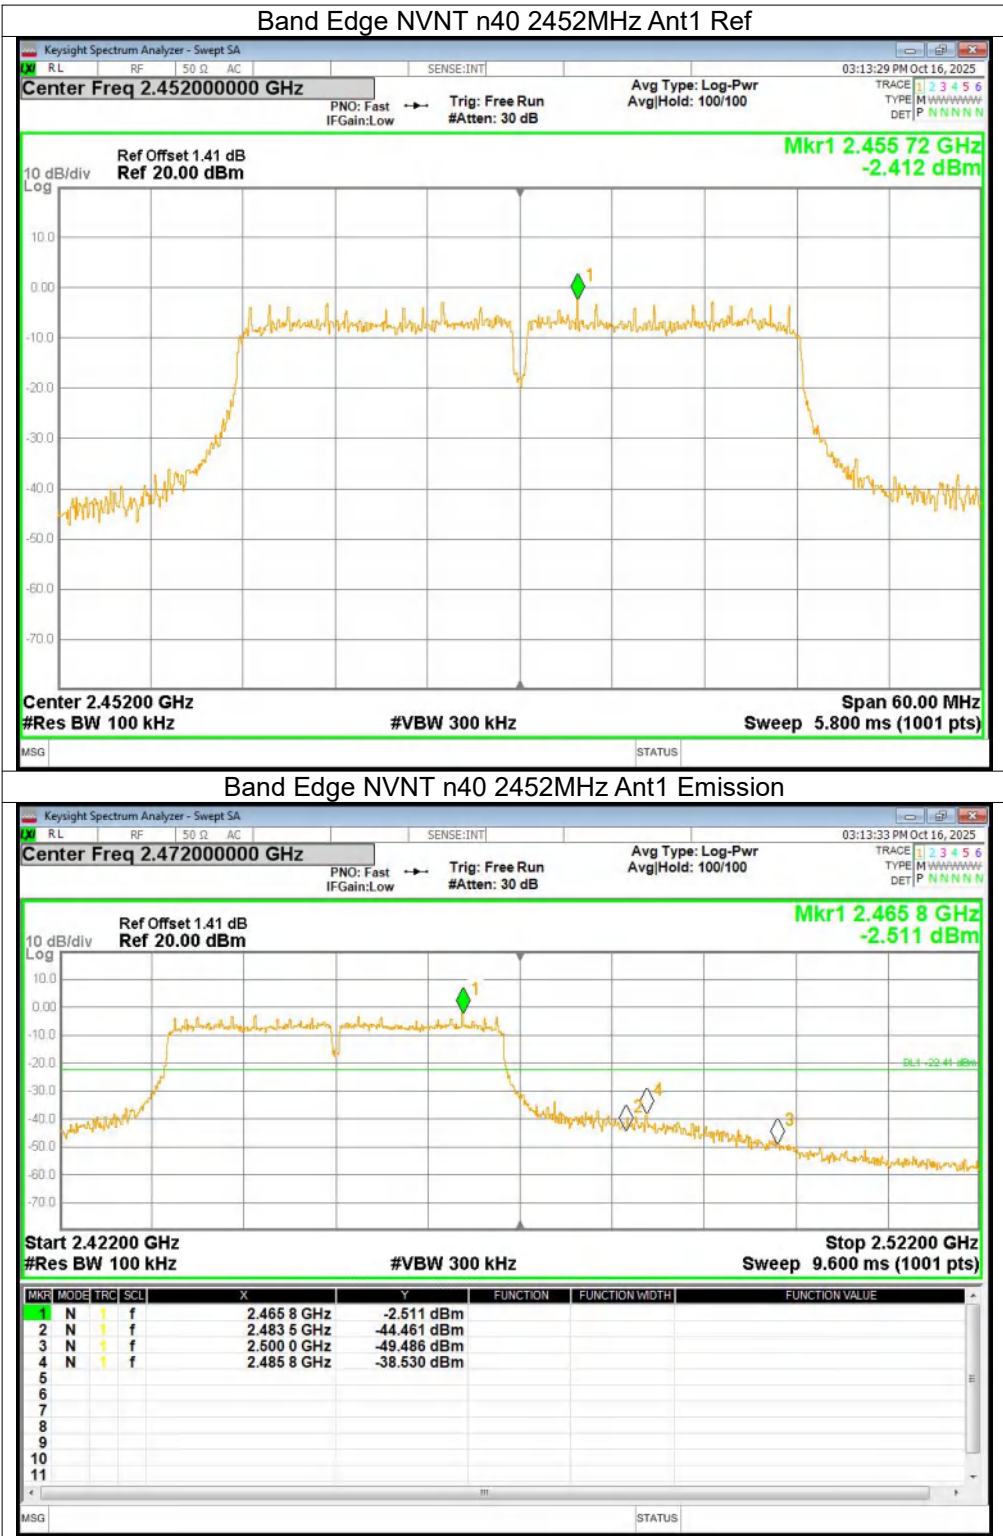

Conducted RF Spurious Emission:pass


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-47.39	-20	Pass
NVNT	b	2437	Ant1	-46.87	-20	Pass
NVNT	b	2462	Ant1	-47.37	-20	Pass
NVNT	g	2412	Ant1	-45.37	-20	Pass
NVNT	g	2437	Ant1	-45.72	-20	Pass
NVNT	g	2462	Ant1	-46.54	-20	Pass
NVNT	n20	2412	Ant1	-47.21	-20	Pass
NVNT	n20	2437	Ant1	-47.64	-20	Pass
NVNT	n20	2462	Ant1	-47.75	-20	Pass
NVNT	n40	2422	Ant1	-45.17	-20	Pass
NVNT	n40	2437	Ant1	-44.36	-20	Pass
NVNT	n40	2452	Ant1	-45.02	-20	Pass

Test Graphs

Tx. Spurious NVNT b 2412MHz Ant1 Ref




Tx. Spurious NVNT b 2412MHz Ant1 Emission

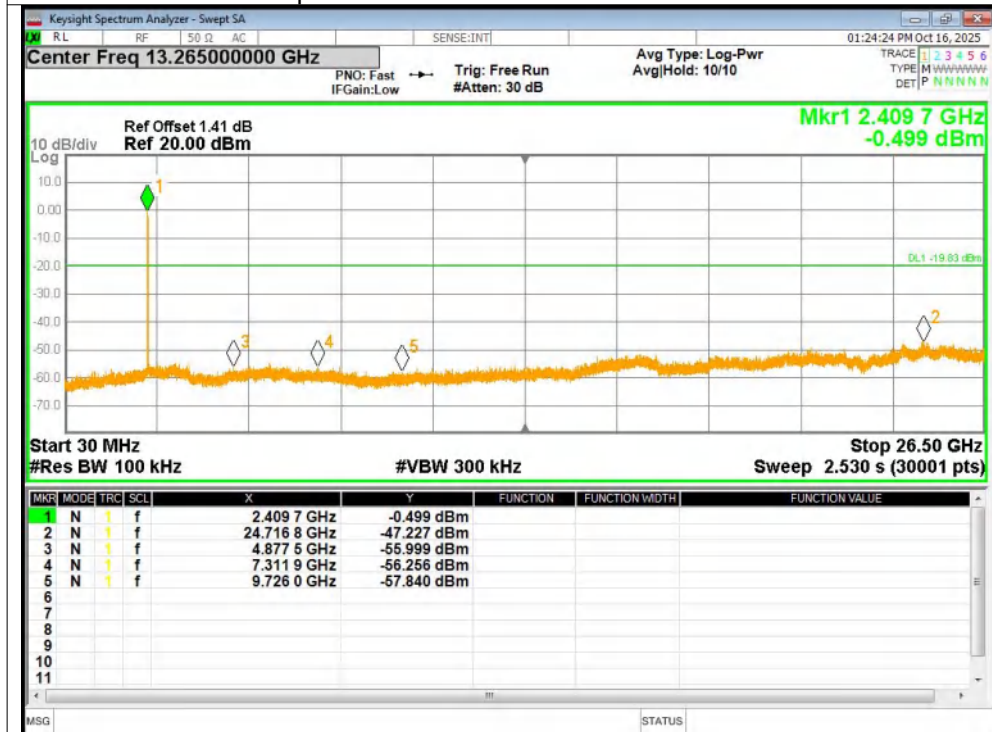


Tx. Spurious NVNT b 2437MHz Ant1 Ref




Tx. Spurious NVNT b 2437MHz Ant1 Emission

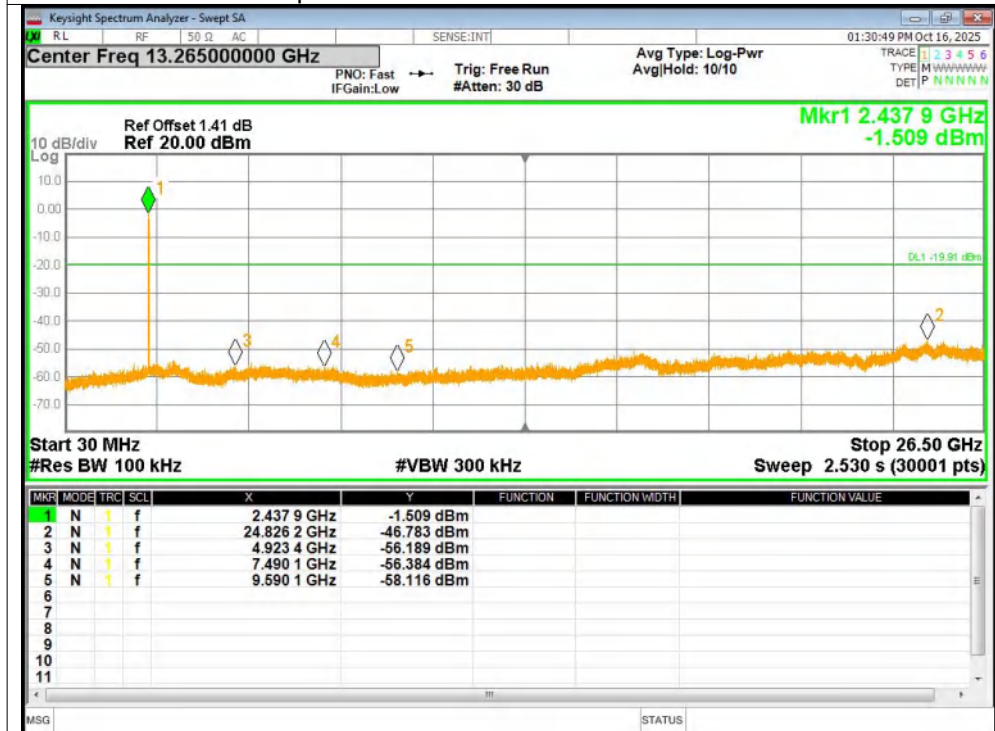




Tx. Spurious NVNT b 2462MHz Ant1 Ref


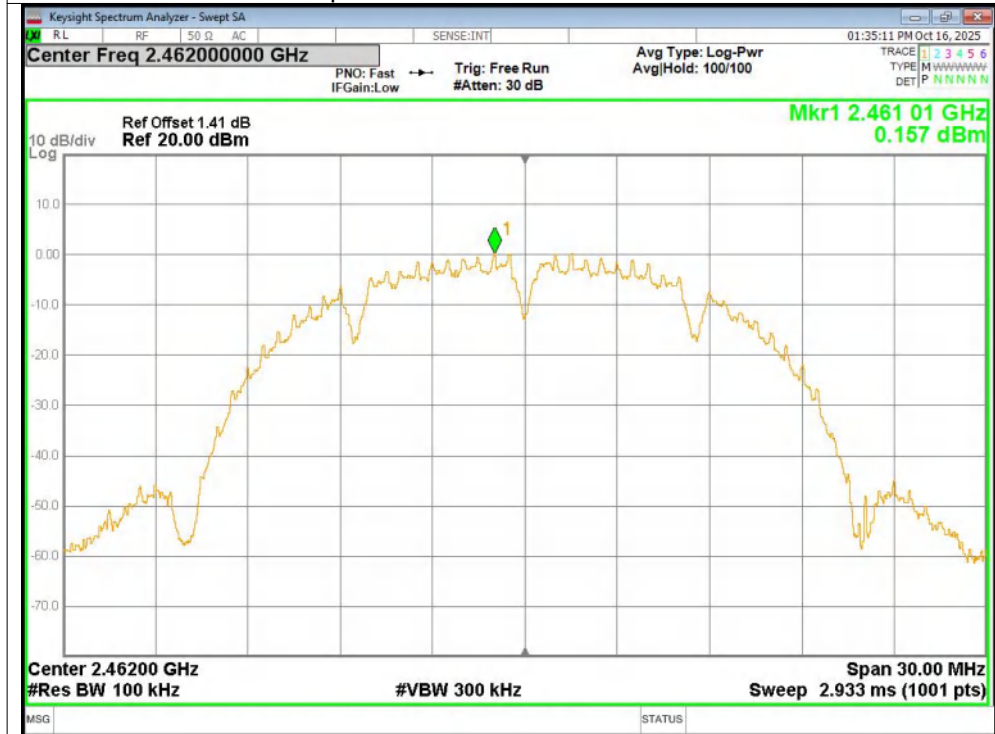


Tx. Spurious NVNT b 2462MHz Ant1 Emission

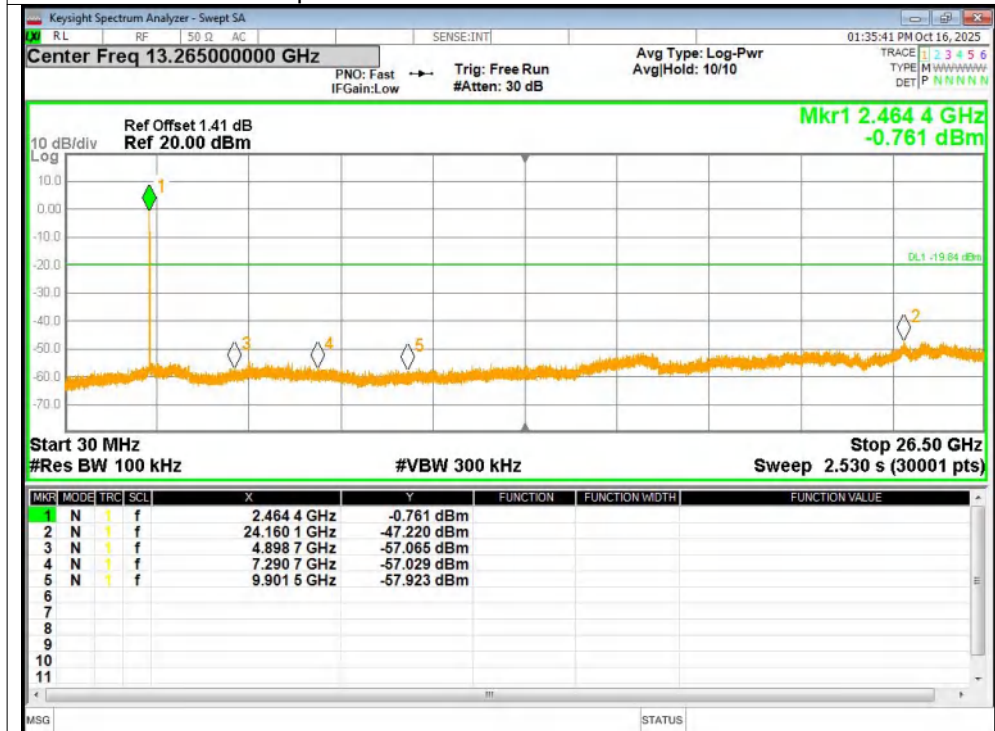


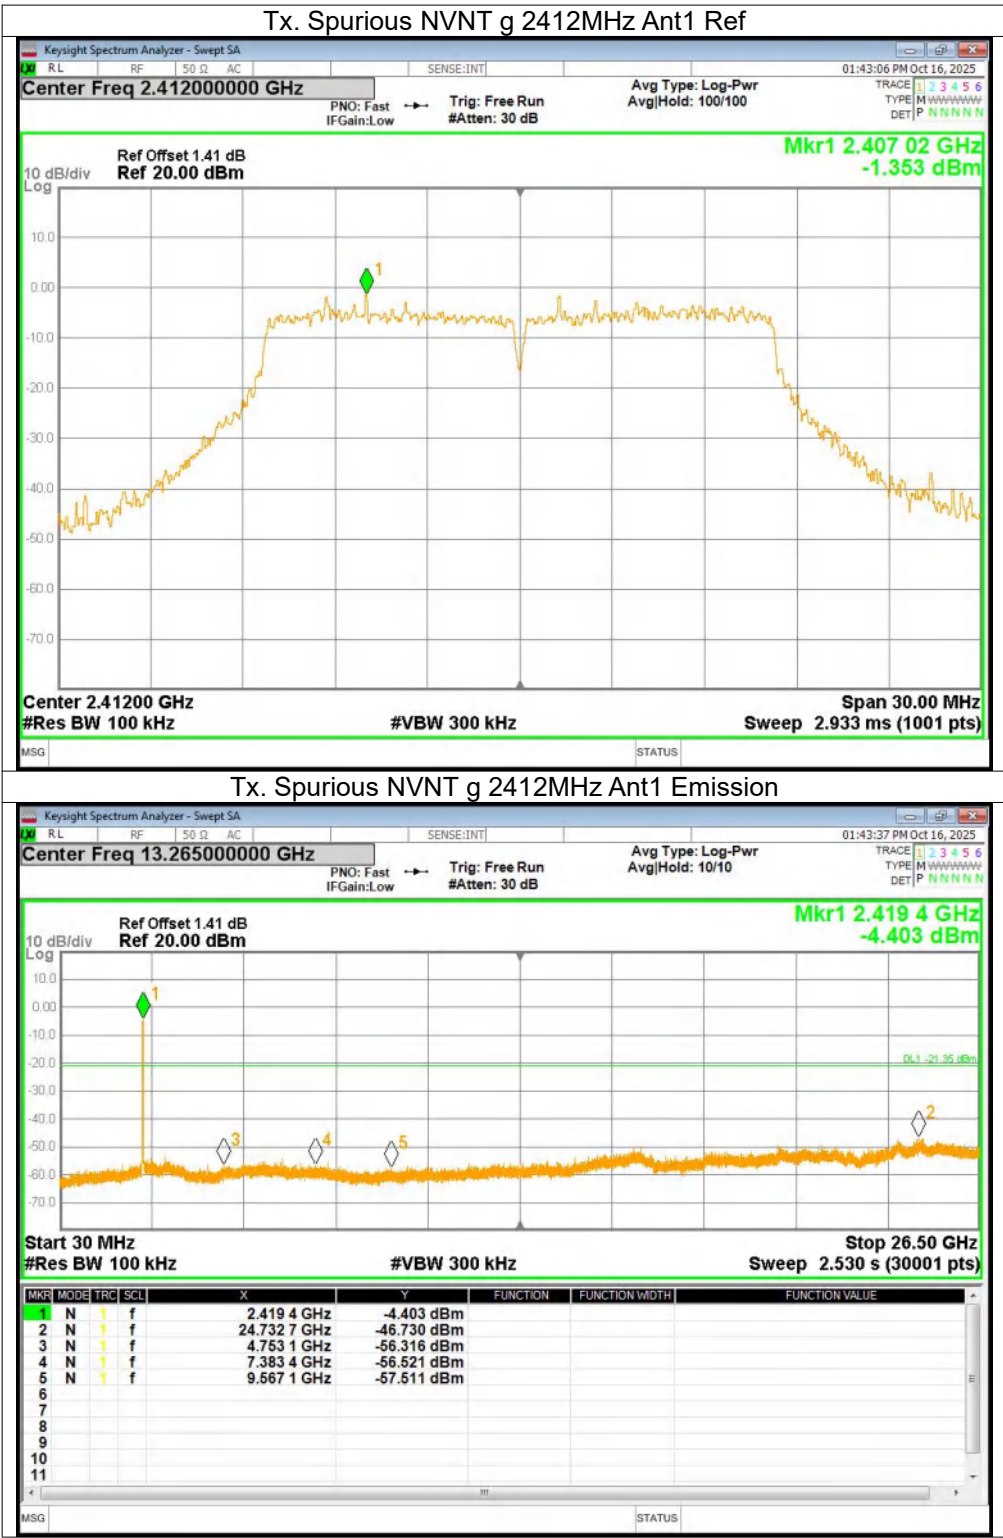

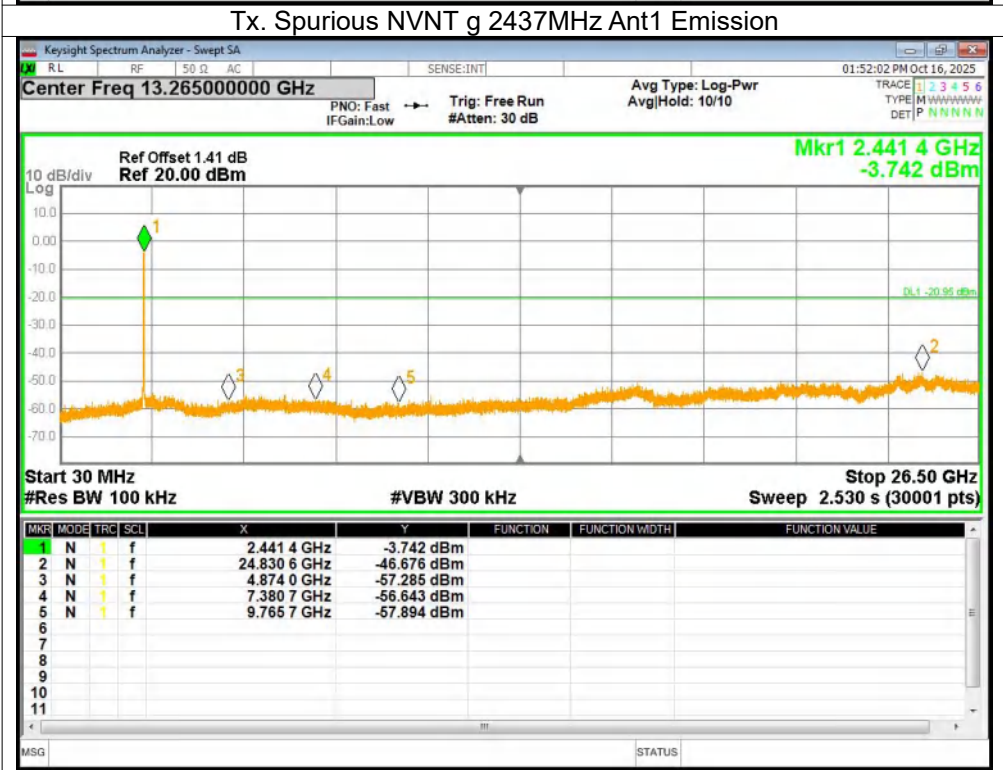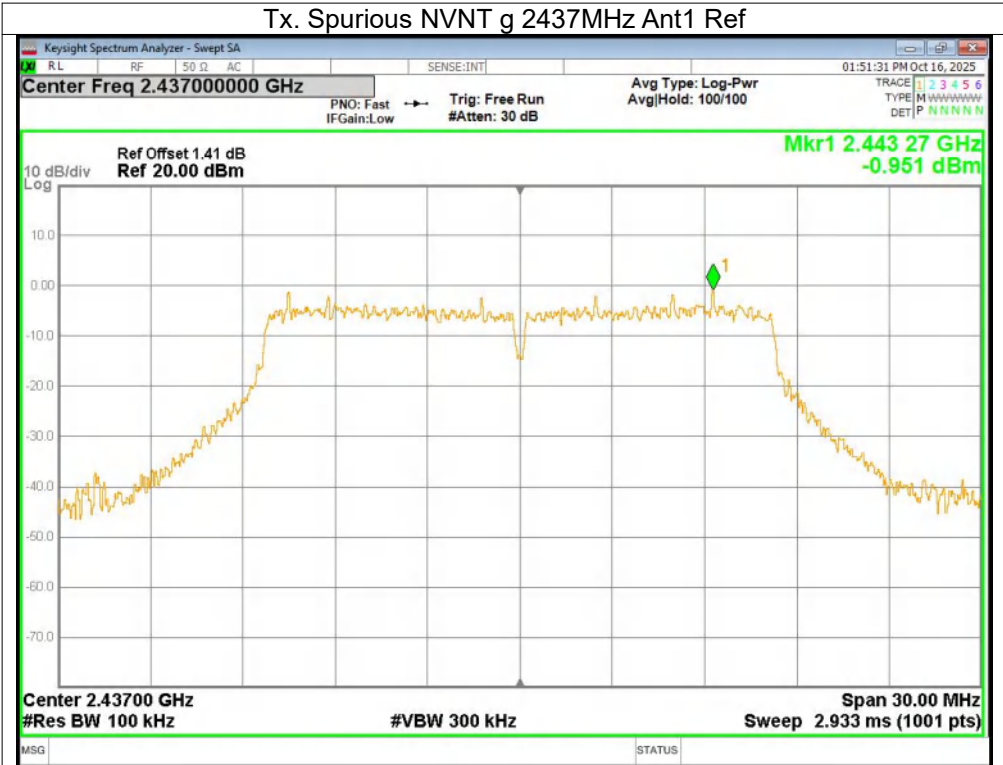


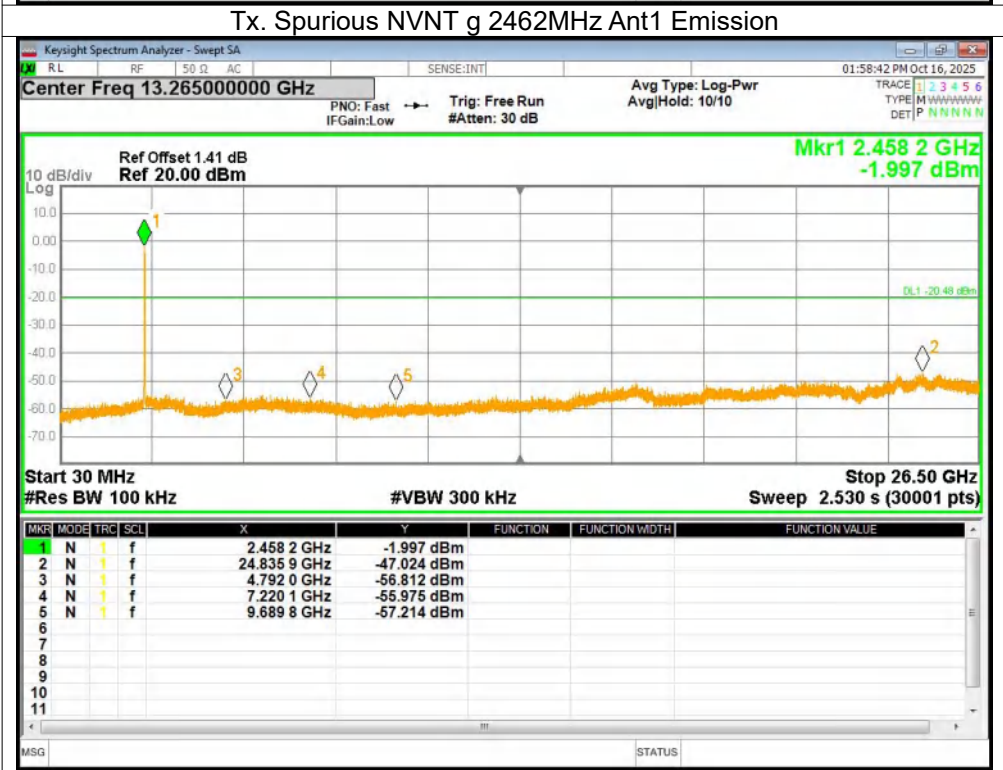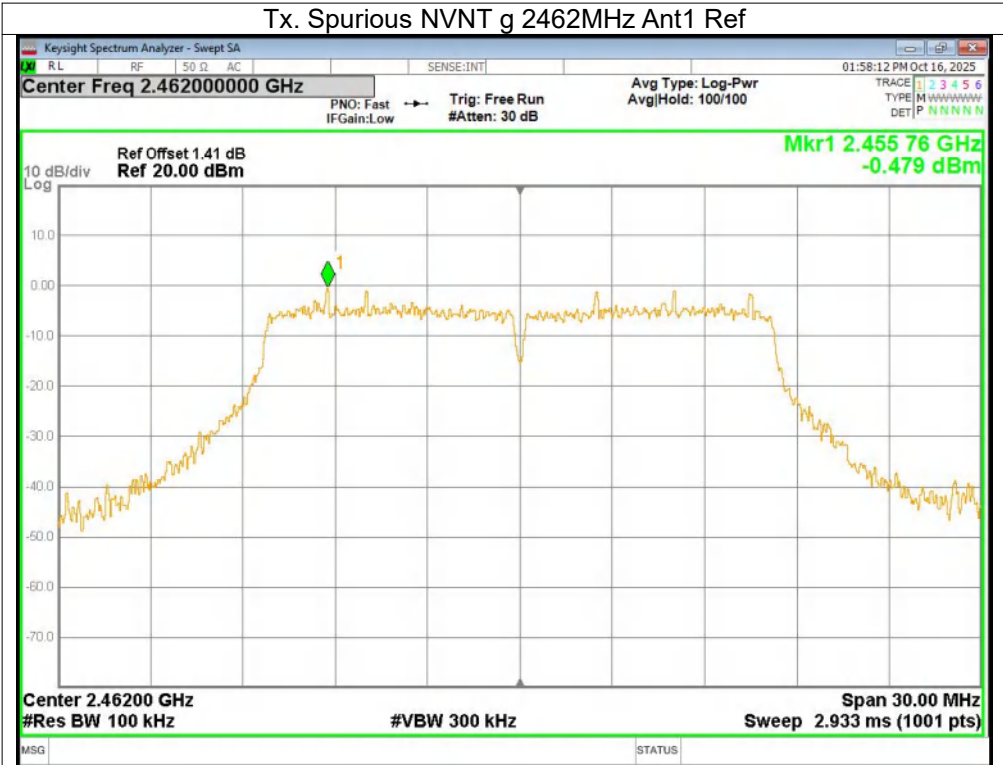


Tx. Spurious NVNT n20 2412MHz Ant1 Ref

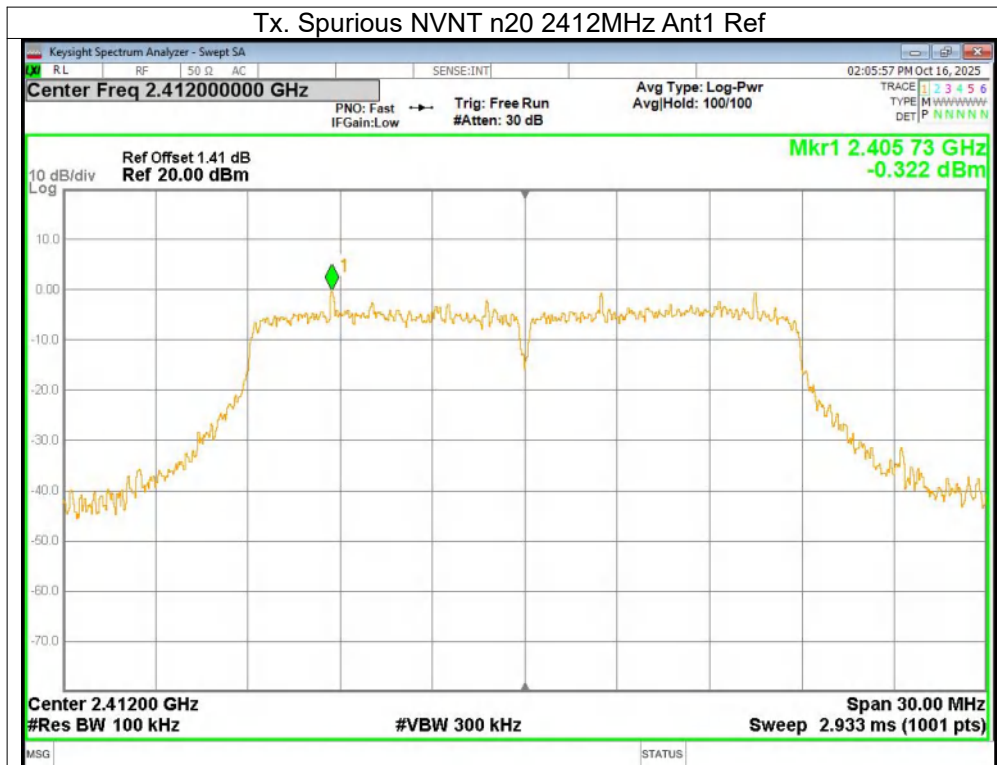


Tx. Spurious NVNT n20 2412MHz Ant1 Emission

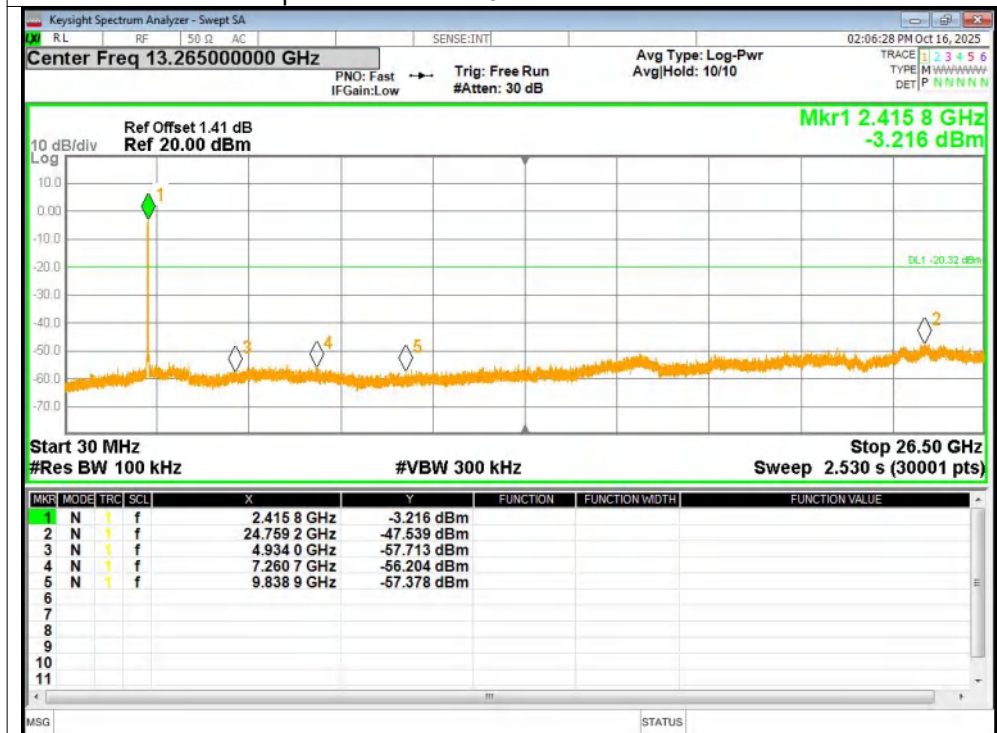


Tx. Spurious NVNT n20 2437MHz Ant1 Ref

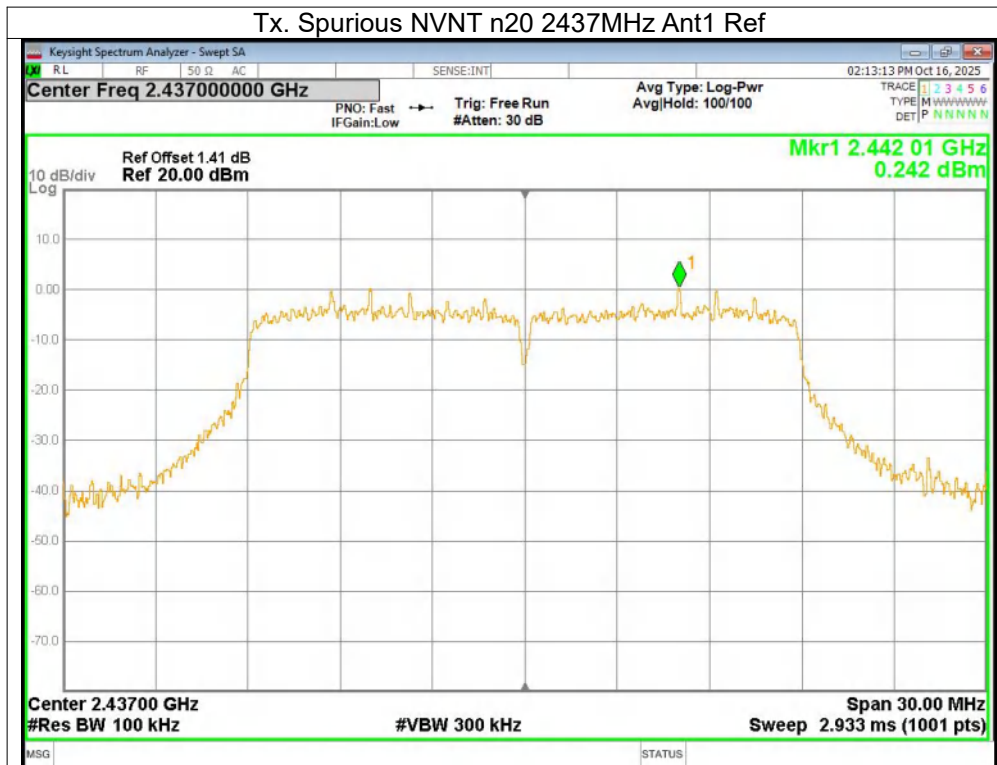


Tx. Spurious NVNT n20 2437MHz Ant1 Emission

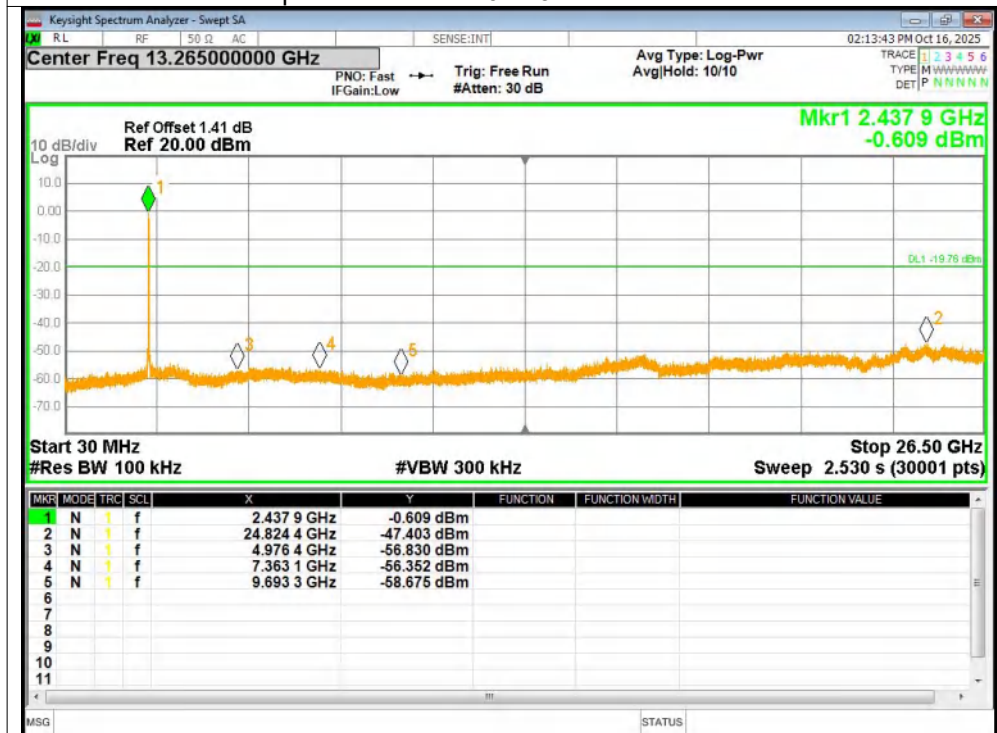


Tx. Spurious NVNT n20 2462MHz Ant1 Ref

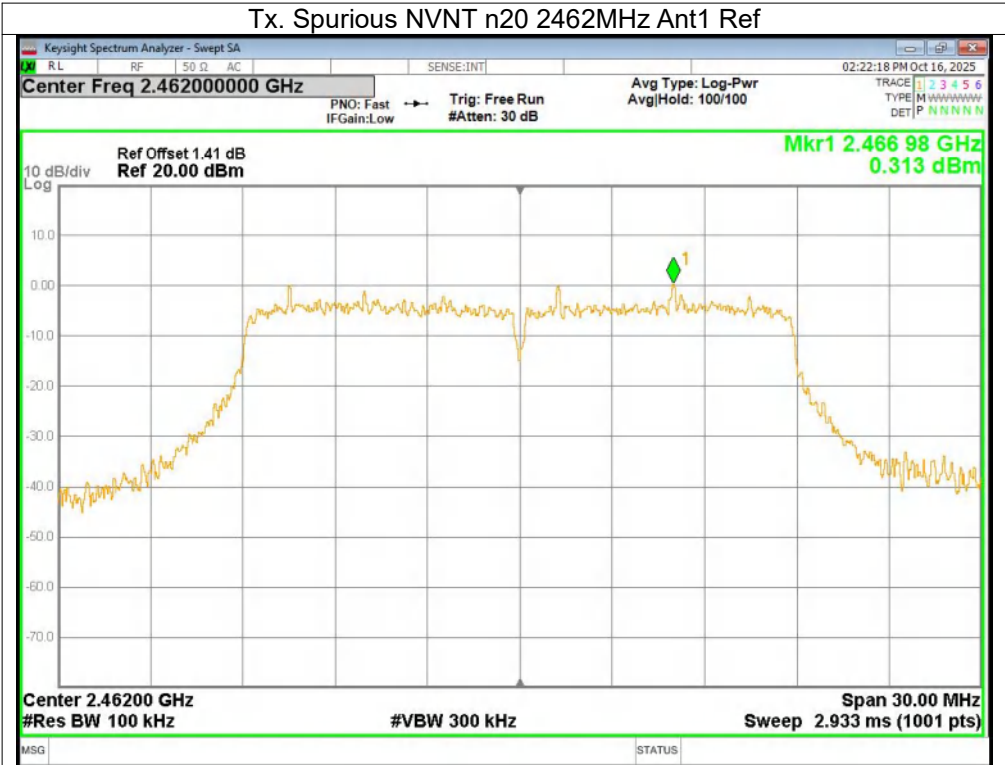


Tx. Spurious NVNT n20 2462MHz Ant1 Emission

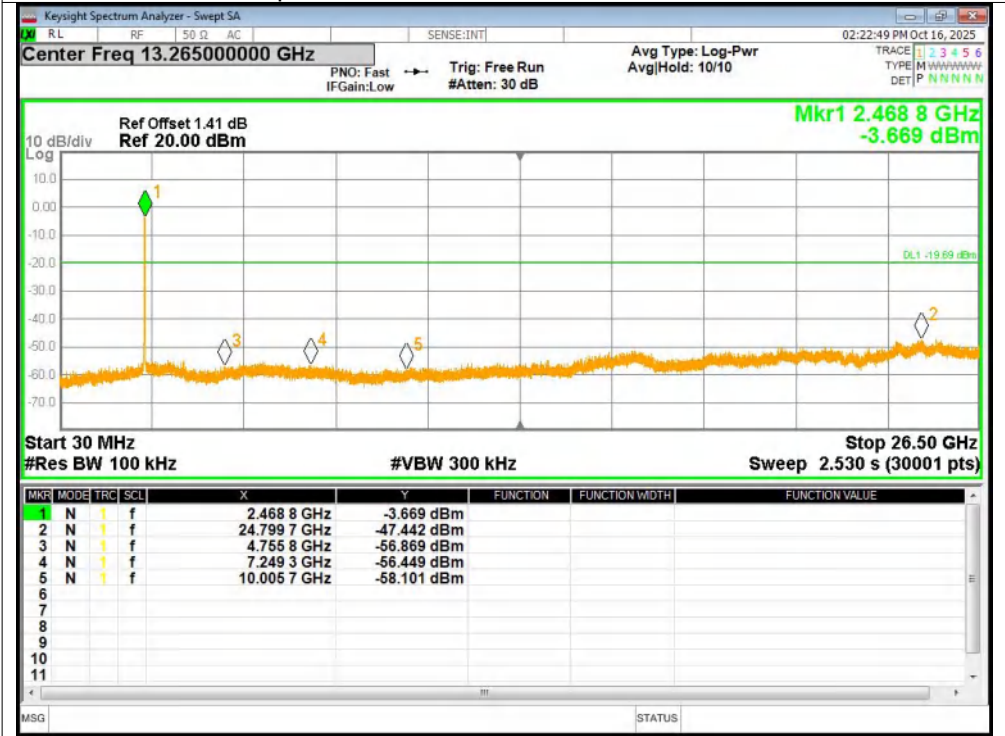


Tx. Spurious NVNT n40 2422MHz Ant1 Ref

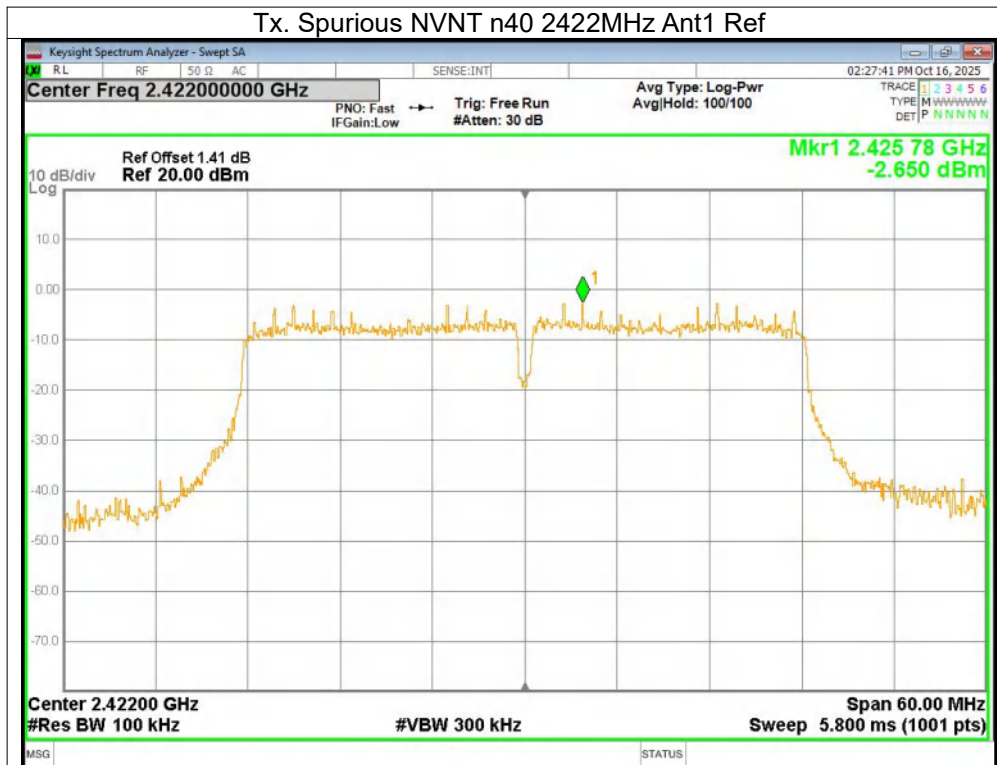


Tx. Spurious NVNT n40 2422MHz Ant1 Emission

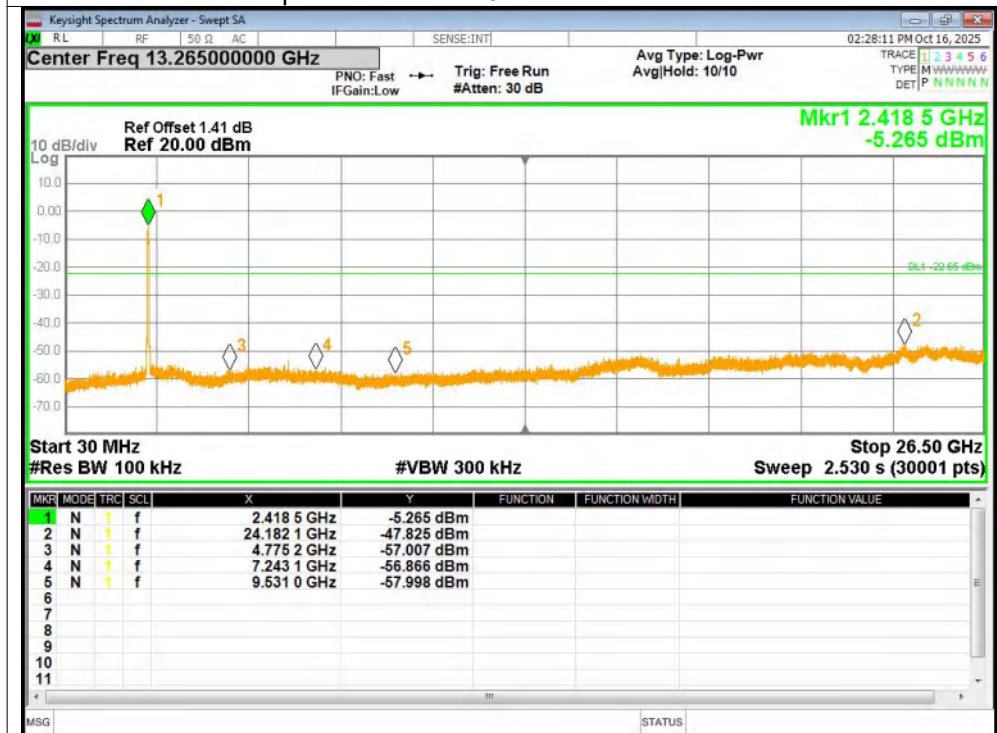


Tx. Spurious NVNT n40 2437MHz Ant1 Ref

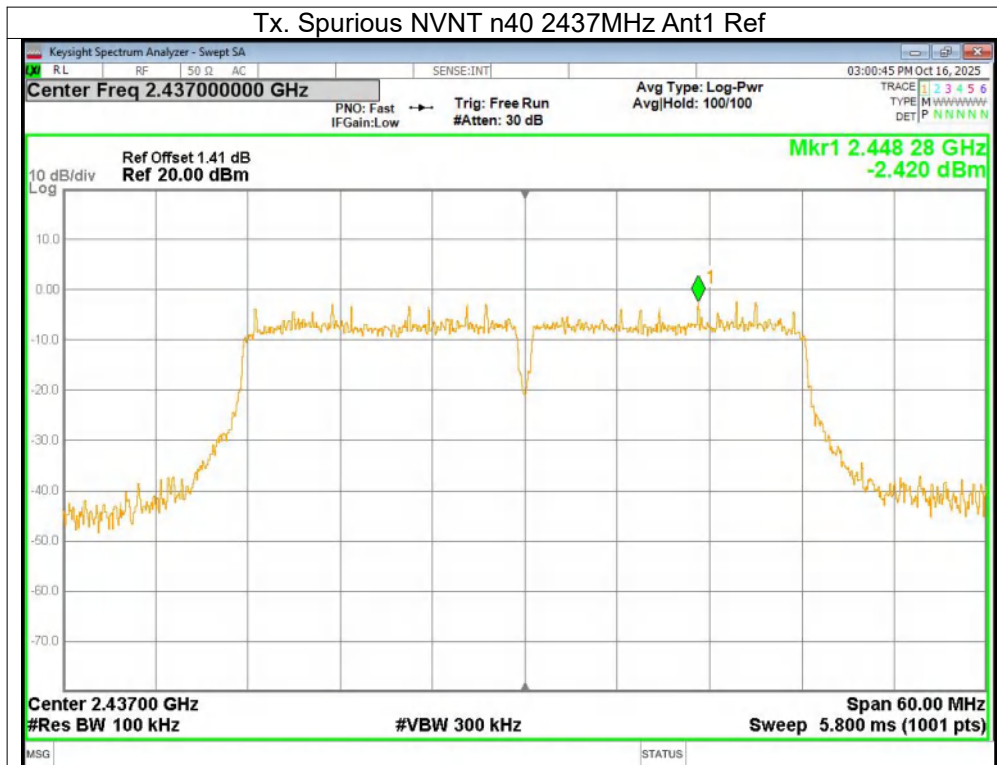

Tx. Spurious NVNT n40 2437MHz Ant1 Emission

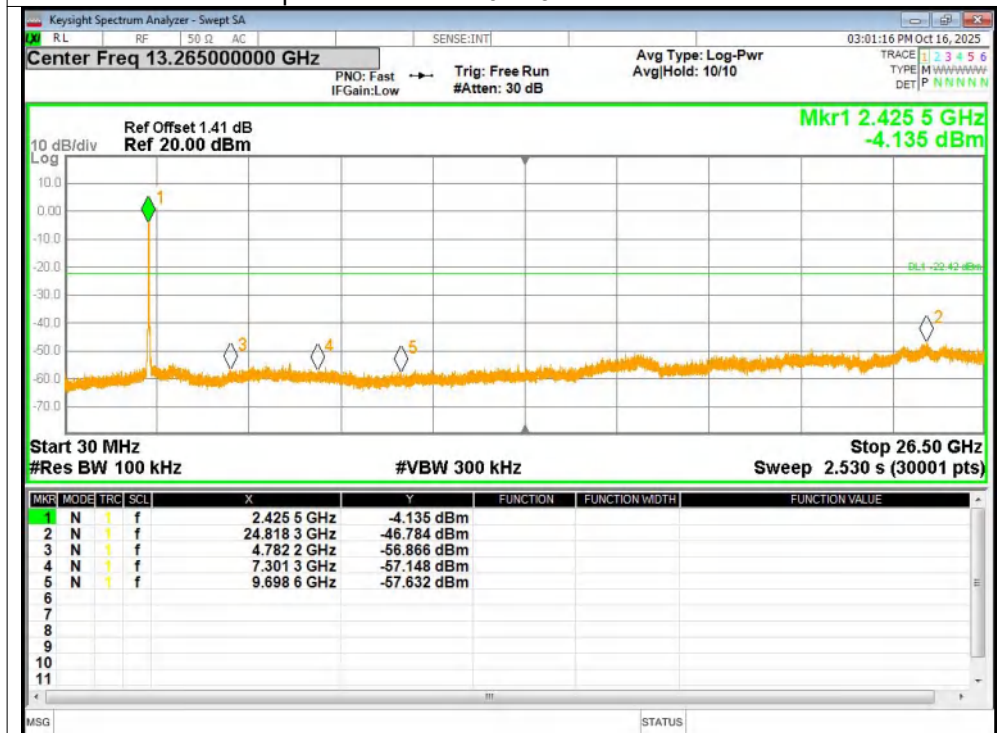

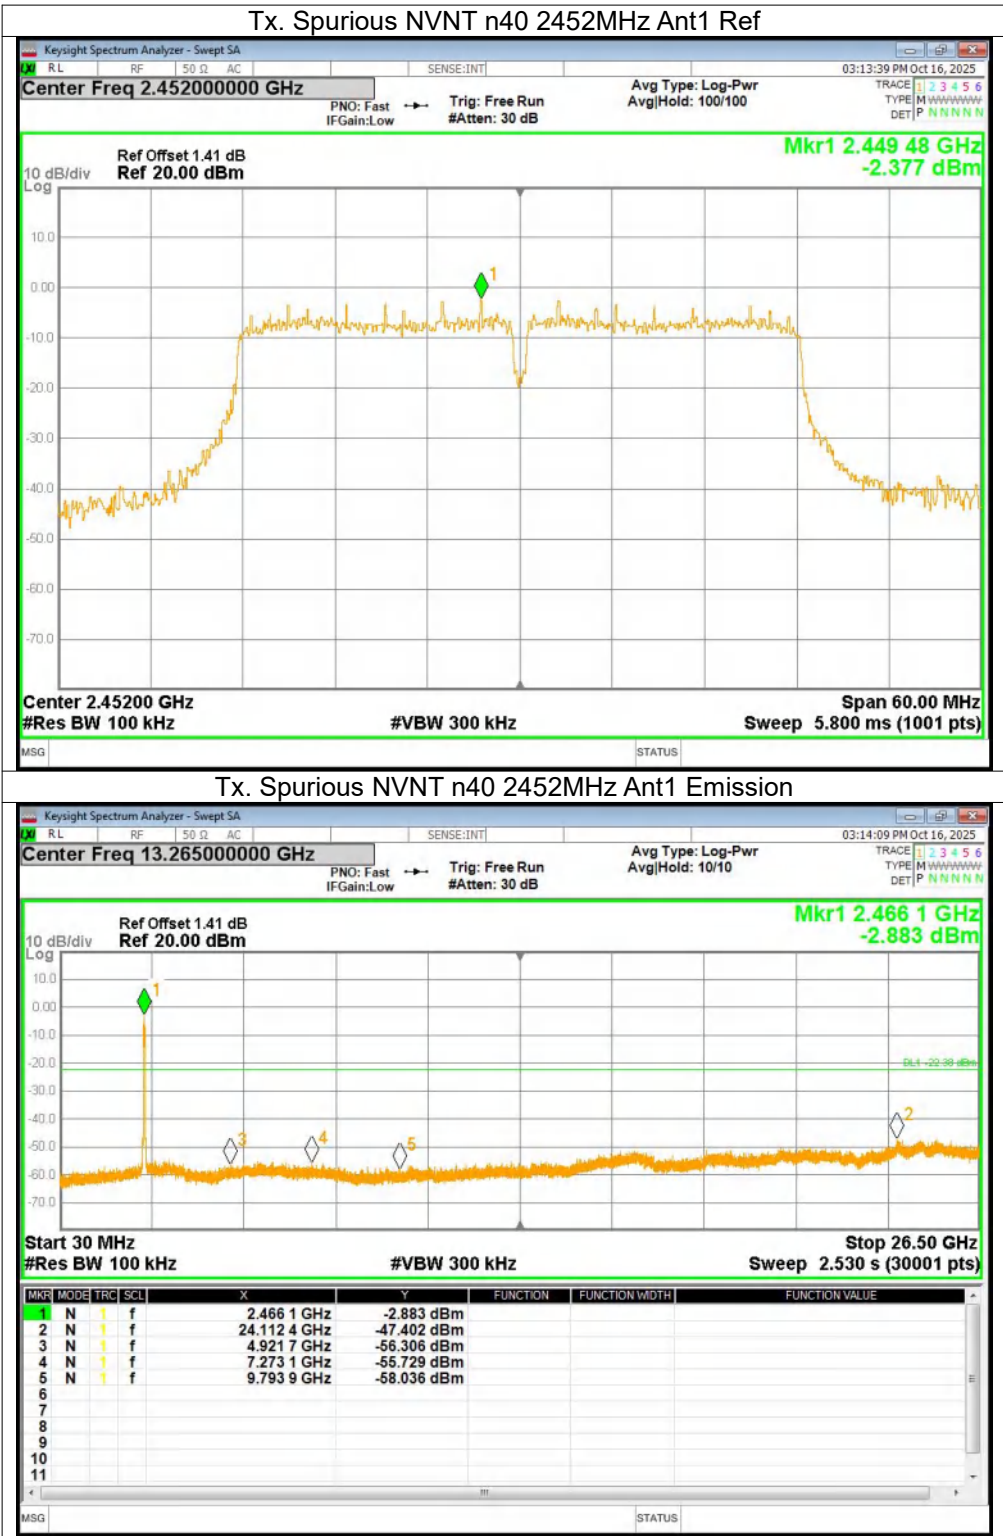

6. Conducted Maximum Peak Output Power

6.1. Test limits

Please refer RSS-247 & FCC PART 15.247.

Regulation 15.247(b) The limit of Maximum Peak Output Power Measurement is 1 W(30dBm)


6.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

1. Place the EUT on the table and set it in transmitting mode.
2. Connected the EUT's antenna port to peak power meter by 20dB attenuator.
3. Measure out each mode and each bands peak output power of EUT.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

6.3. Test Setup



6.4. Test Results

Mode	Frequency (MHz)	Antenna	Total Power (dBm)	Limit (dBm)	Verdict
b	2412	Ant1	7.45	30	Pass
b	2437	Ant1	7.85	30	Pass
b	2462	Ant1	7.91	30	Pass
g	2412	Ant1	8.17	30	Pass
g	2437	Ant1	7.44	30	Pass
g	2462	Ant1	7.54	30	Pass
n20	2412	Ant1	7.87	30	Pass
n20	2437	Ant1	7.26	30	Pass
n20	2462	Ant1	7.43	30	Pass
n40	2422	Ant1	7.16	30	Pass
n40	2437	Ant1	7.43	30	Pass
n40	2452	Ant1	8.74	30	Pass

7. Peak Power Spectral Density

7.1. Test limits


1. Please refer RSS-247 & FCC PART 15.247.
2. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
3. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

7.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02


1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3kHz(Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.), VBW = 10kHz(Set the $\text{VBW} \geq 3 \times \text{RBW}$), span $\geq 1.5 \times \text{DTS bandwidth}$., detail see the test plot.
4. Record the max reading.
5. Repeat the above procedure until the measurements for all frequencies are completed.


7.3. Test Setup







7.4. Test Results


Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
b	2412	Ant1	11.87	30	Pass
b	2437	Ant1	11.24	30	Pass
b	2462	Ant1	11.35	30	Pass
g	2412	Ant1	14.45	30	Pass
g	2437	Ant1	14.97	30	Pass
g	2462	Ant1	15	30	Pass
n20	2412	Ant1	15.48	30	Pass
n20	2437	Ant1	15.69	30	Pass
n20	2462	Ant1	15.92	30	Pass
n40	2422	Ant1	15.83	30	Pass
n40	2437	Ant1	16.06	30	Pass
n40	2452	Ant1	16.09	30	Pass

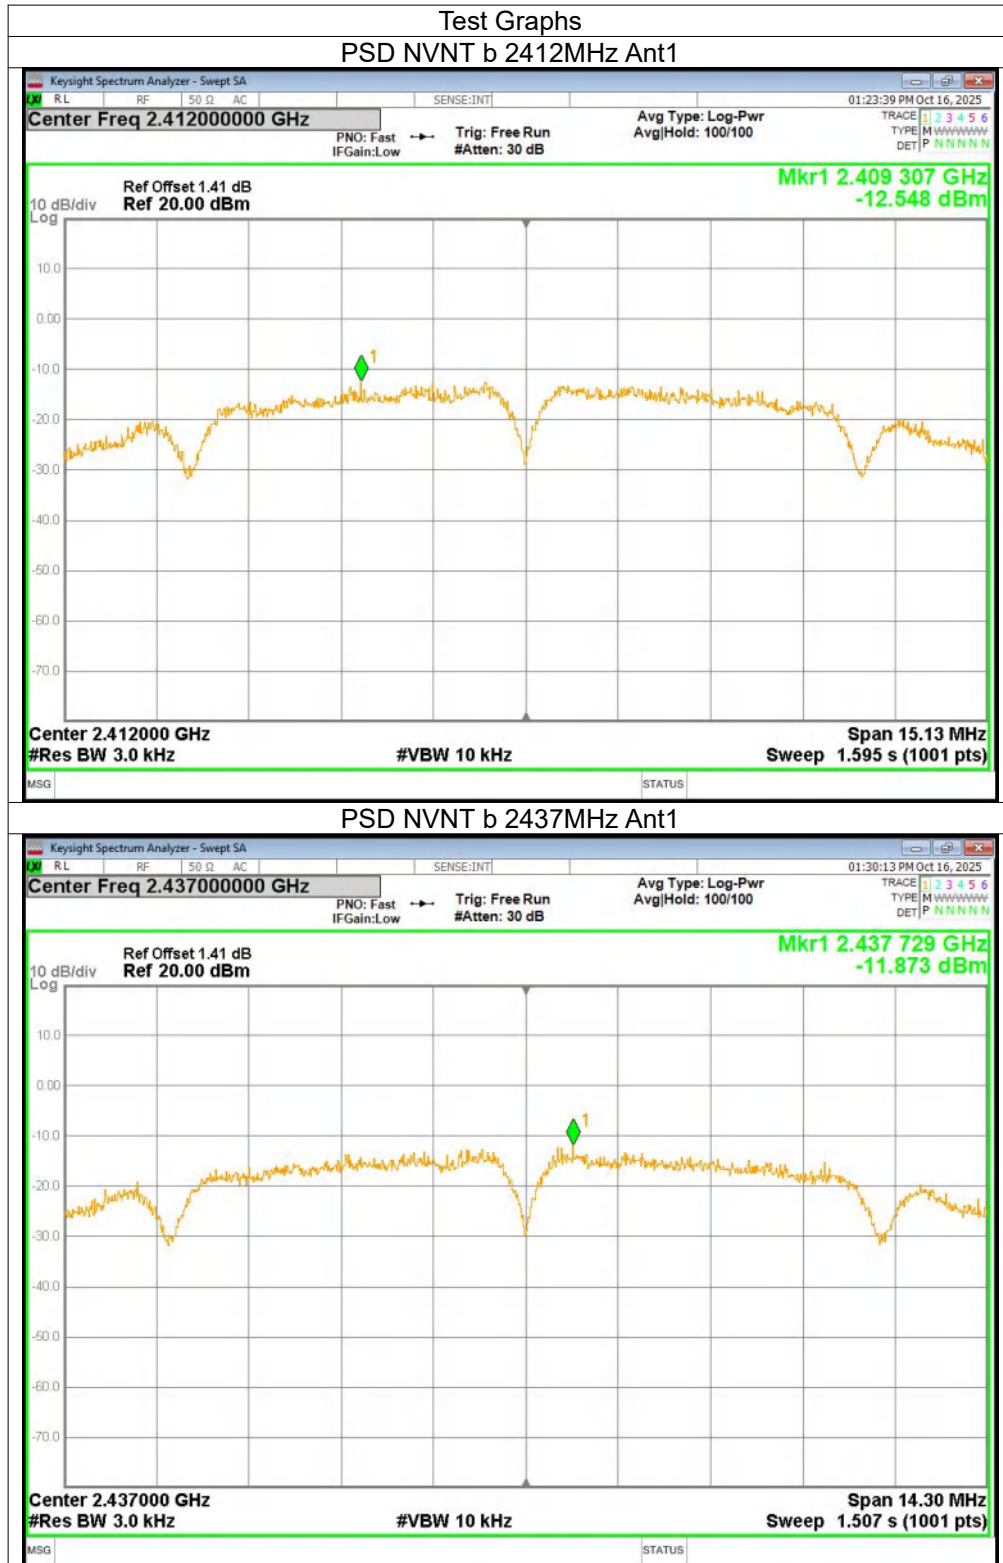

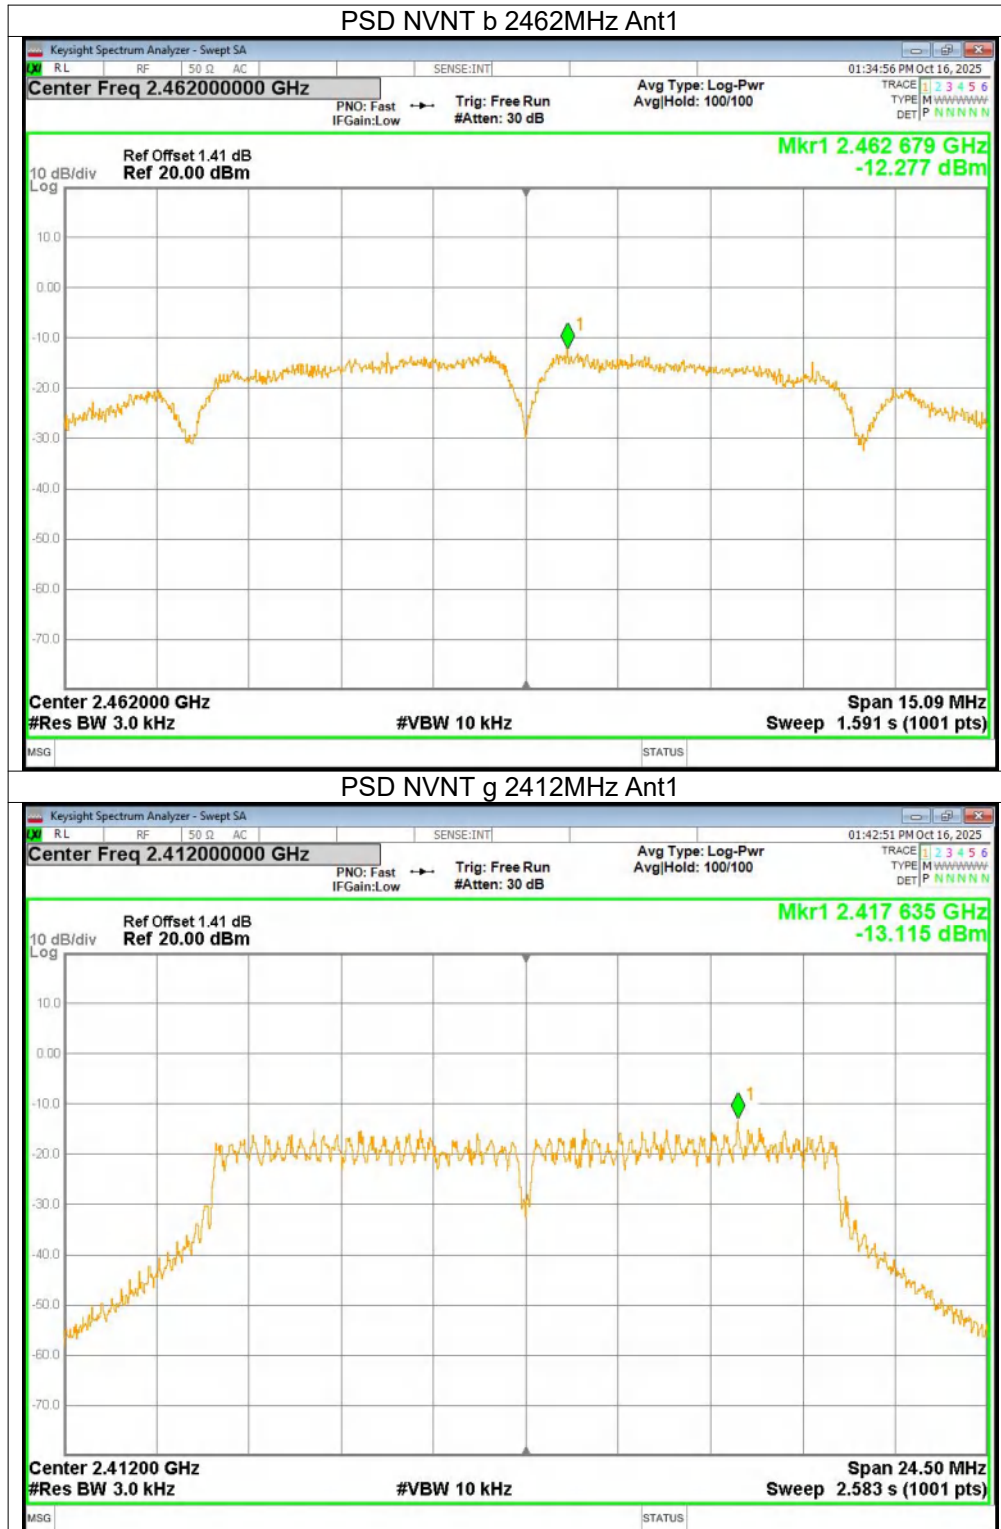


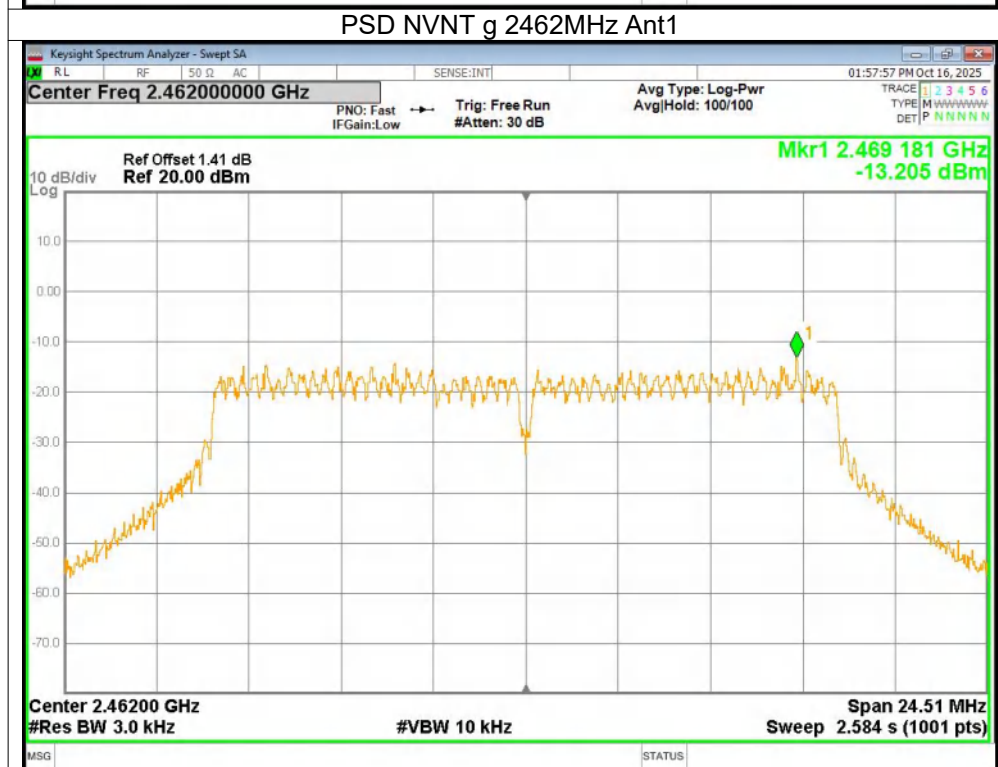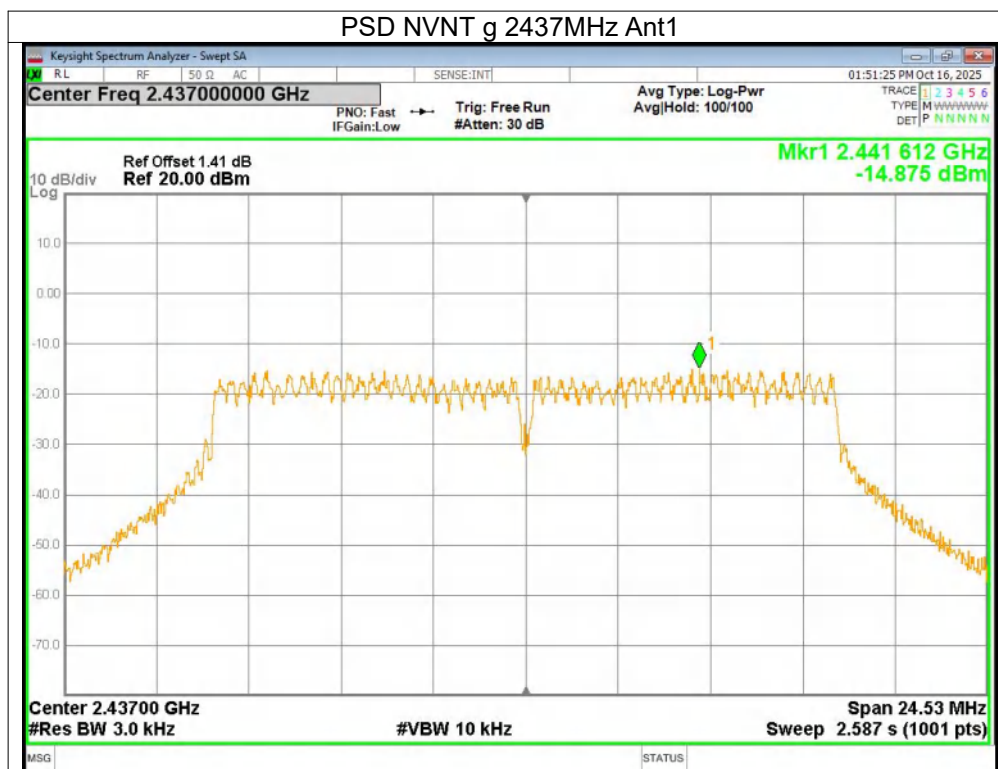

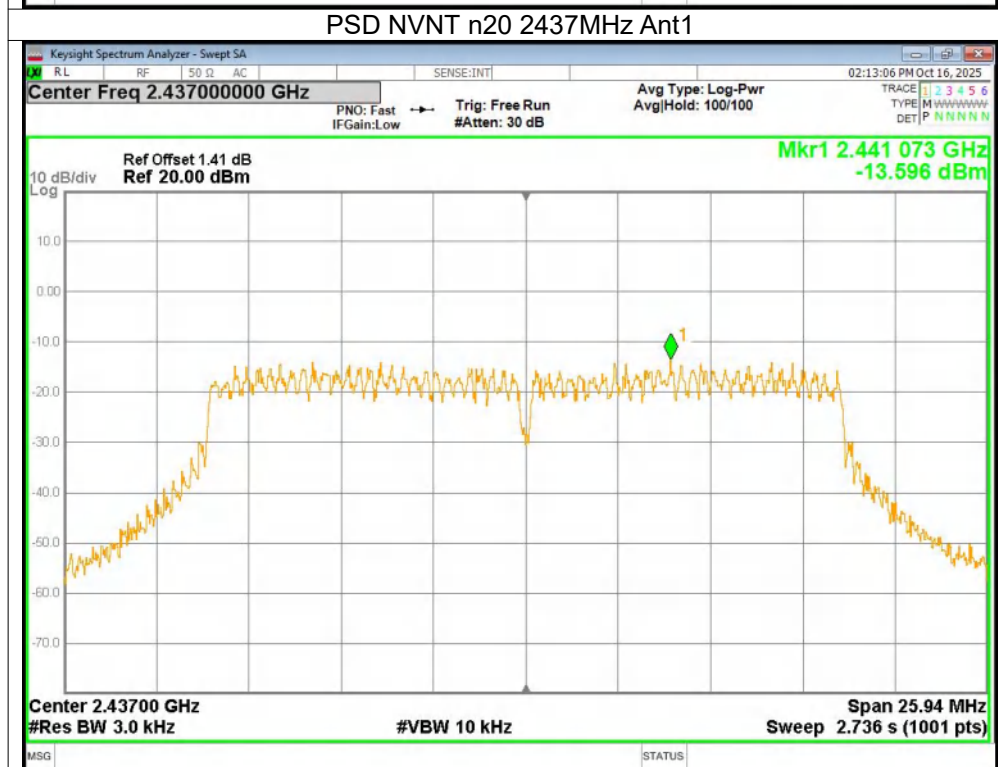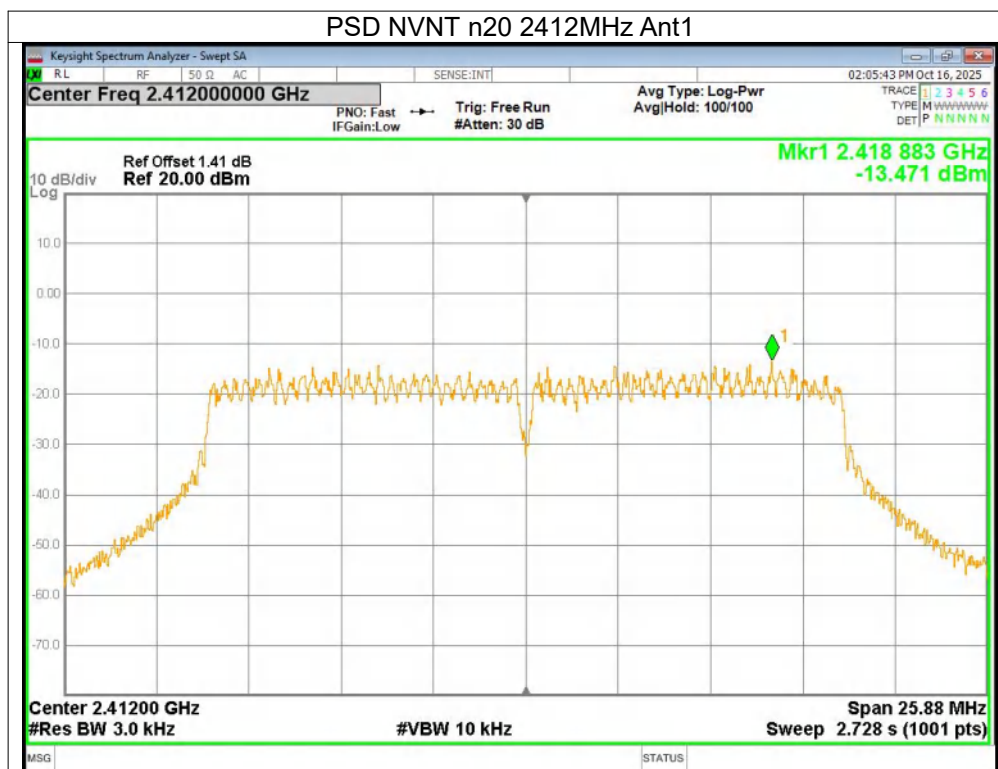


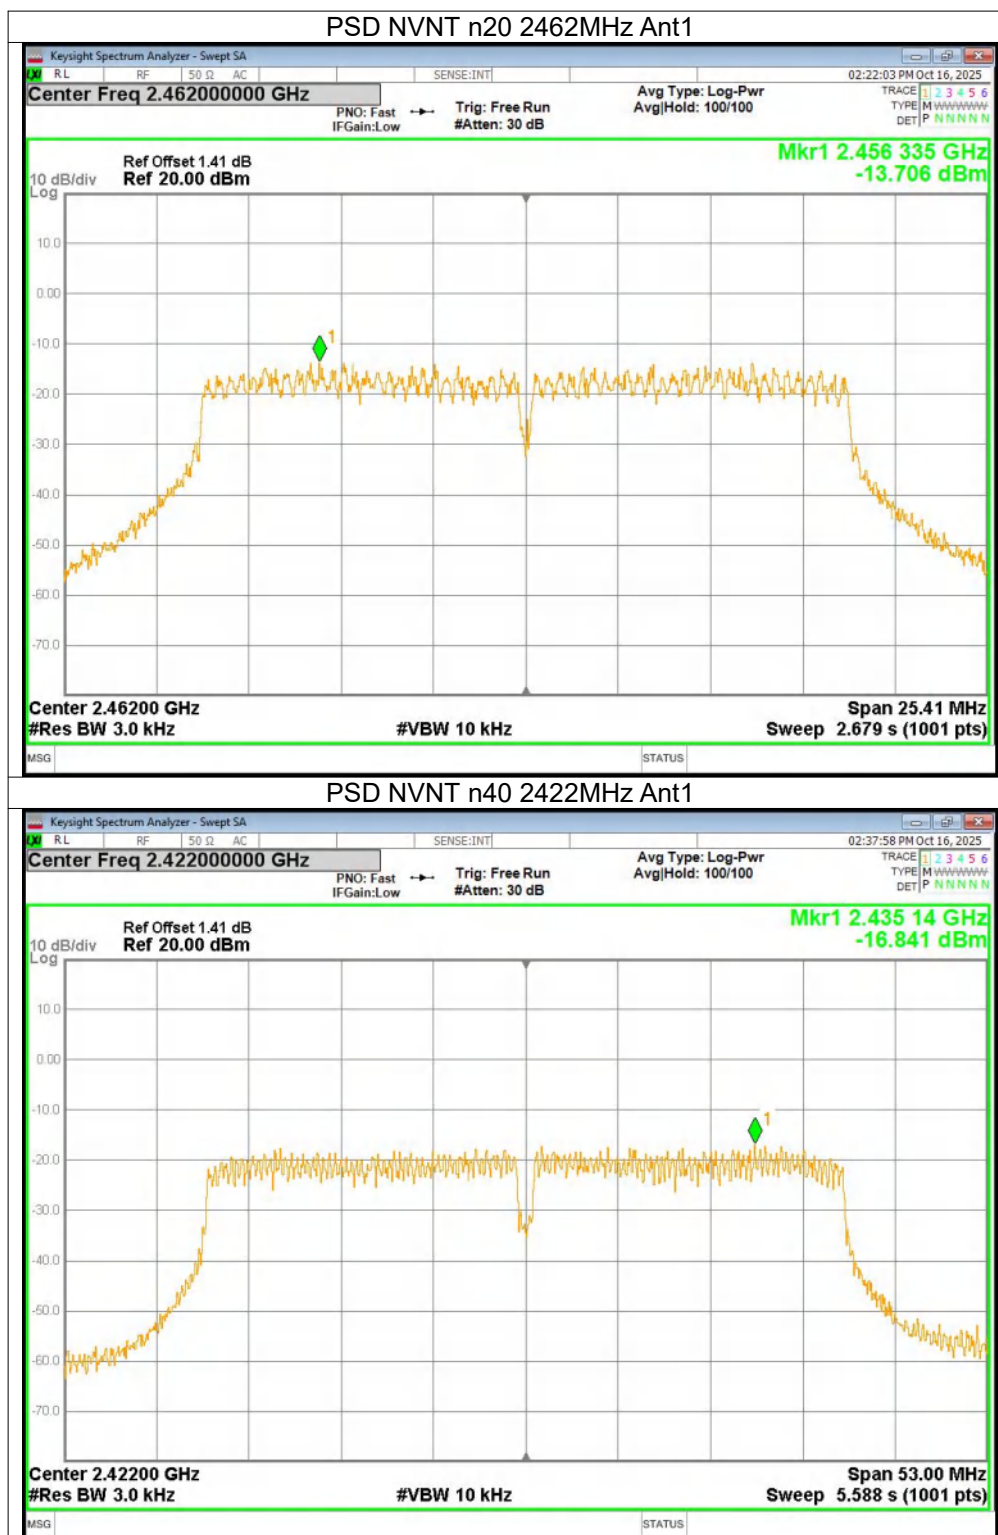

PSD NVNT n40 2437MHz Ant1

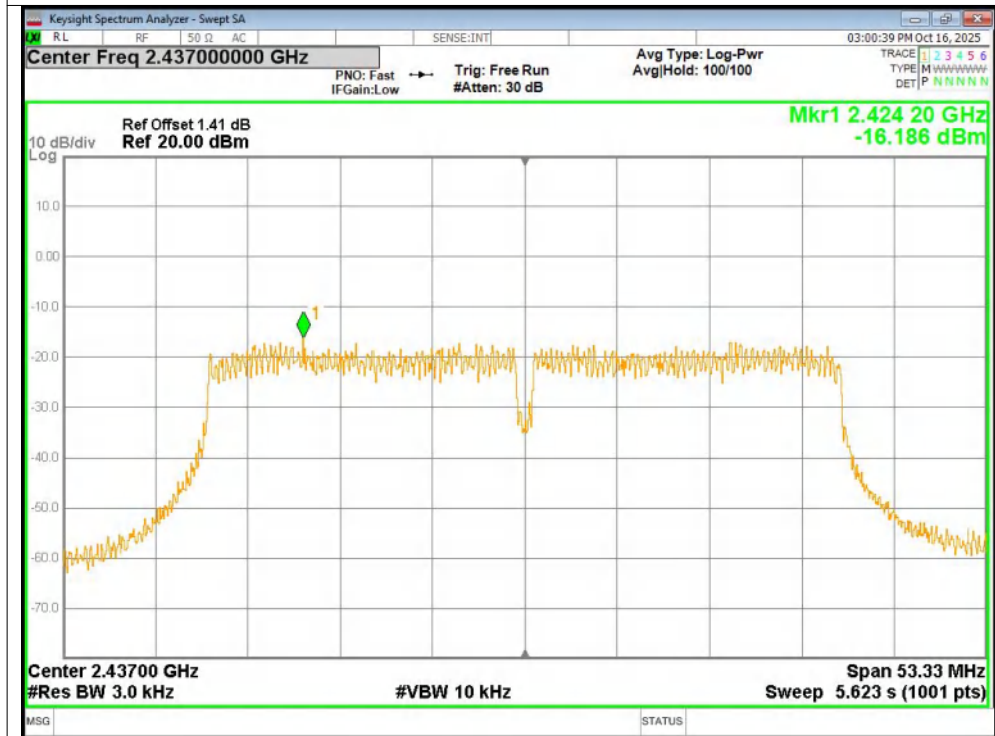

PSD NVNT n40 2452MHz Ant1

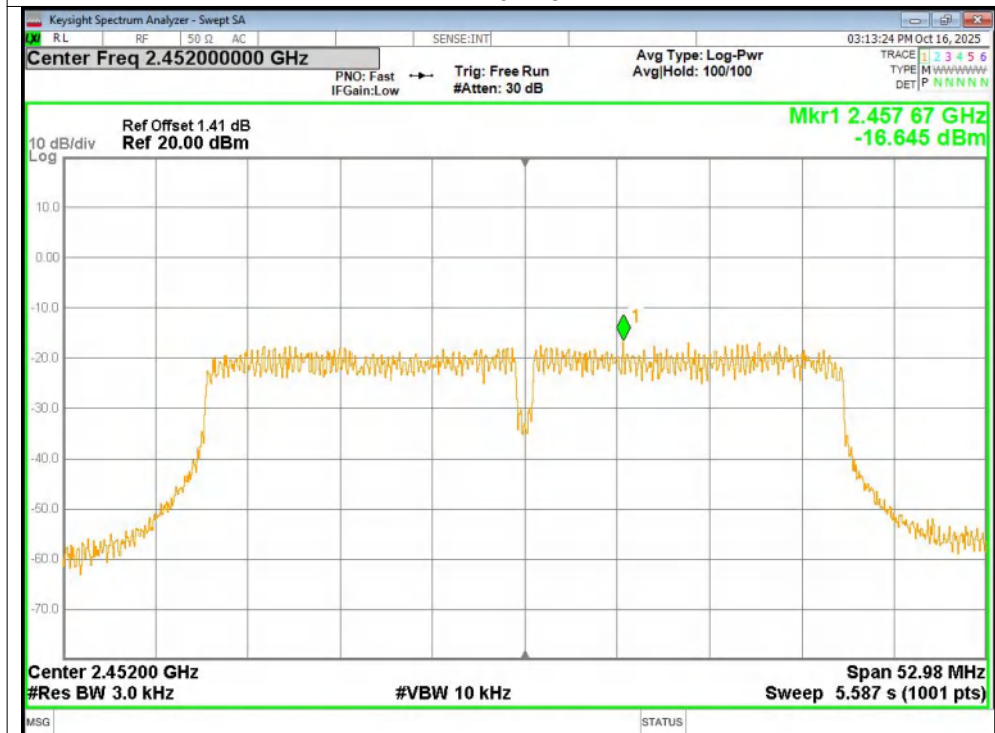

8. Bandwidth

8.1. Test limits

Please refer RSS-247 & FCC PART 15.247

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz.


8.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

a) The bandwidth is measured at an amplitude level reduced 6dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

b) The test receiver set RBW = 1% to 5% of the OBW, VBW $\geq$ 3*RBW, Peak Detector, Sweep time set auto, detail see the test plot.

8.3. Test Setup




8.4. Test Results

Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
b	2412	Ant1	10.158	0.5	Pass
b	2437	Ant1	10.156	0.5	Pass
b	2462	Ant1	10.134	0.5	Pass
g	2412	Ant1	16.367	0.5	Pass
g	2437	Ant1	16.358	0.5	Pass
g	2462	Ant1	16.306	0.5	Pass
n20	2412	Ant1	17.54	0.5	Pass
n20	2437	Ant1	17.524	0.5	Pass
n20	2462	Ant1	17.553	0.5	Pass
n40	2422	Ant1	36.277	0.5	Pass
n40	2437	Ant1	36.308	0.5	Pass
n40	2452	Ant1	36.253	0.5	Pass



Test Graphs



-6dB Bandwidth NVNT b 2412MHz Ant1


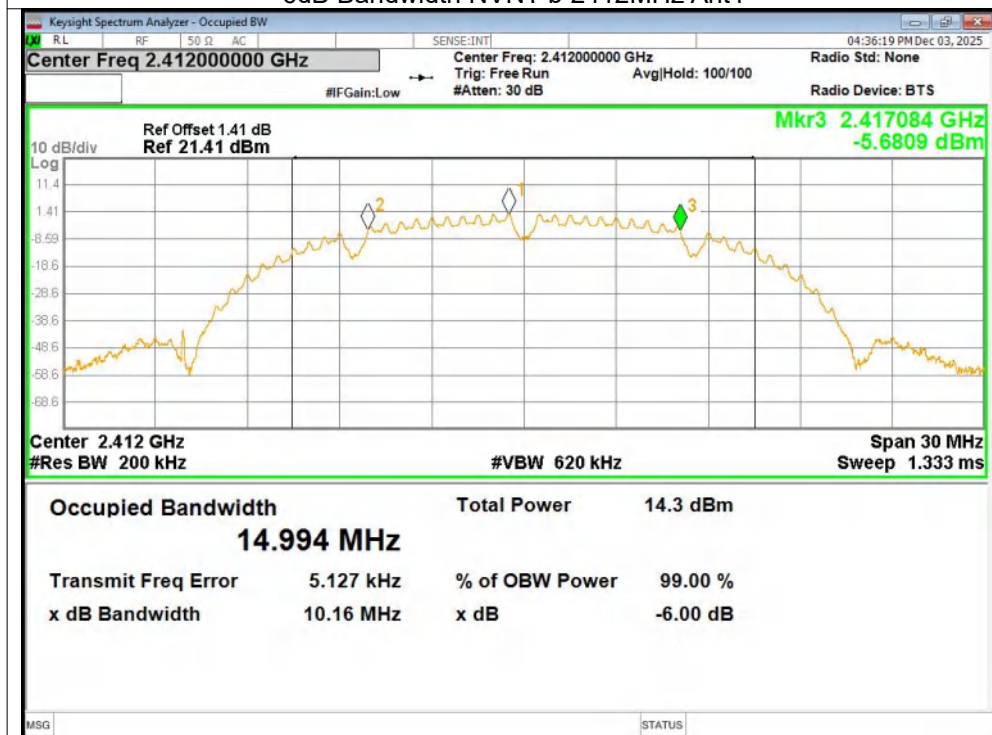




-6dB Bandwidth NVNT b 2437MHz Ant1

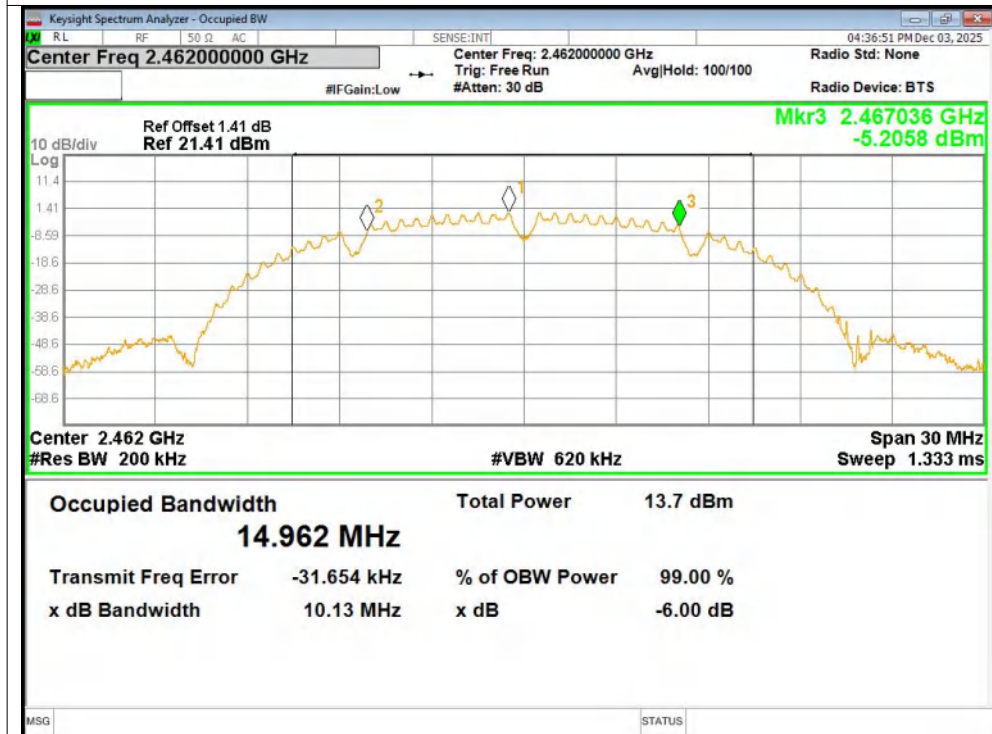
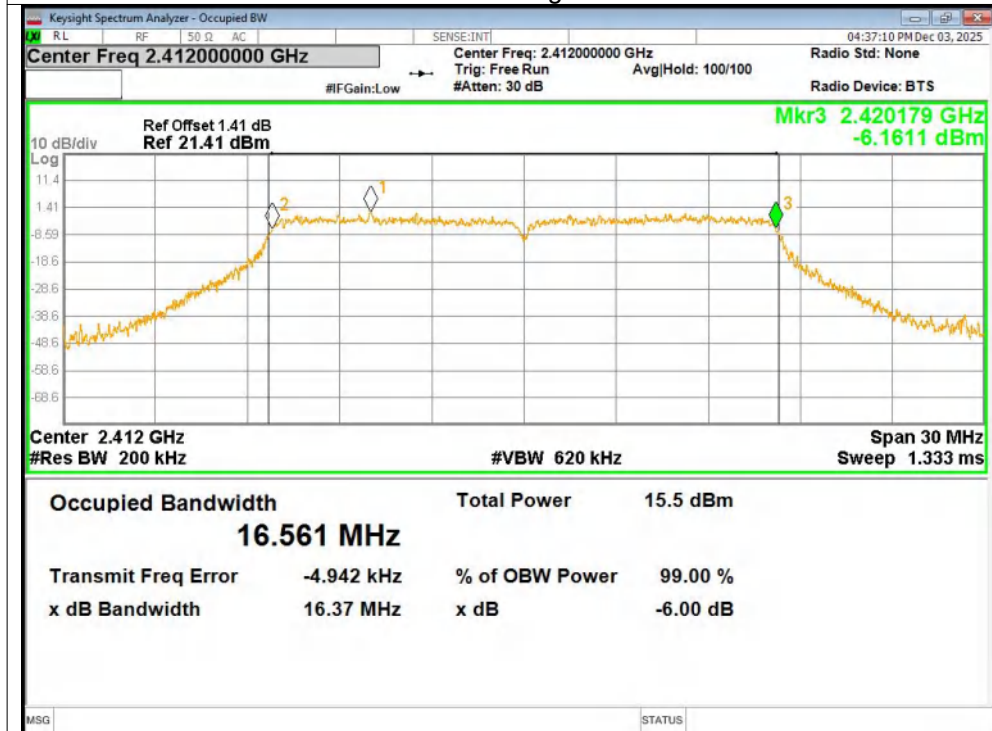


-6dB Bandwidth NVNT b 2462MHz Ant1**-6dB Bandwidth NVNT g 2412MHz Ant1**

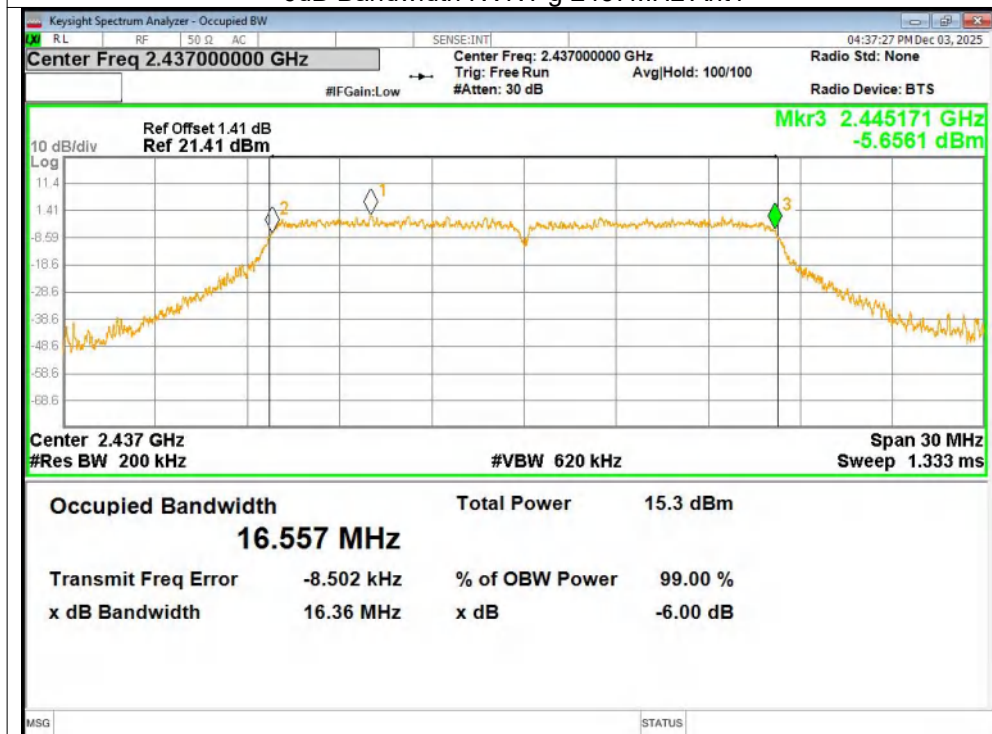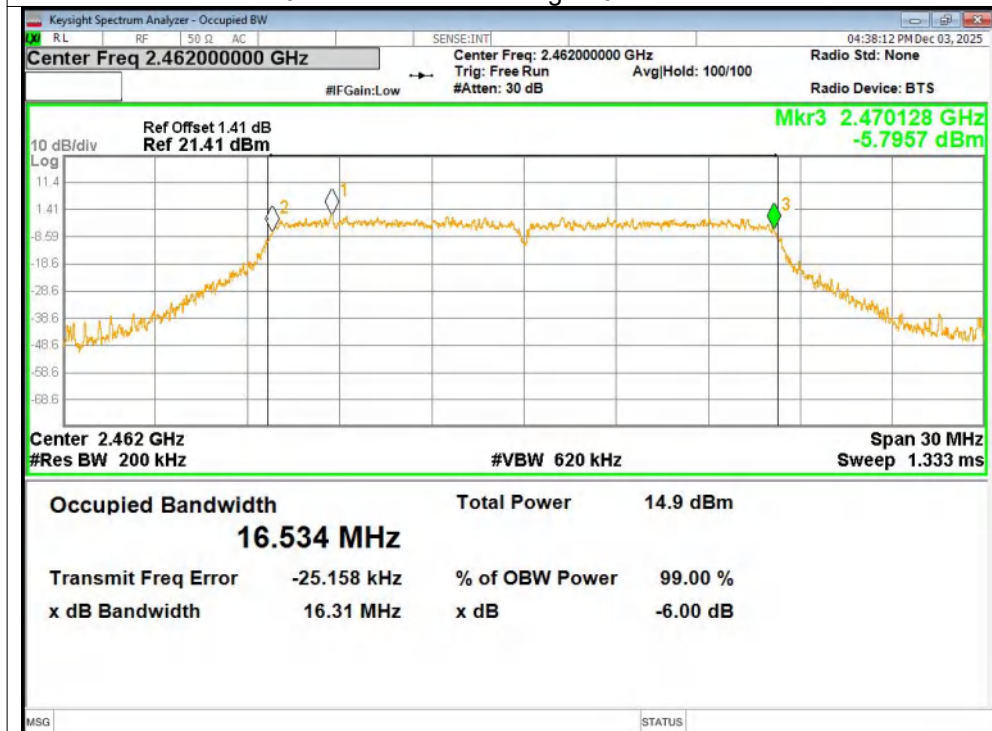-6dB Bandwidth NVNT g 2437MHz Ant1**-6dB Bandwidth NVNT g 2462MHz Ant1**

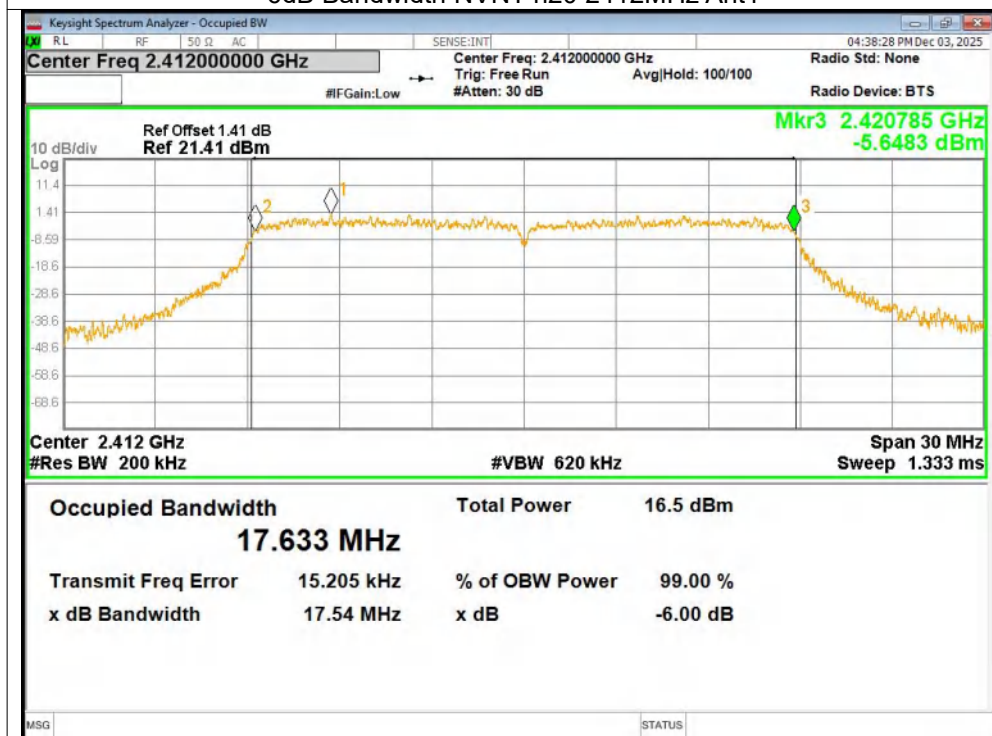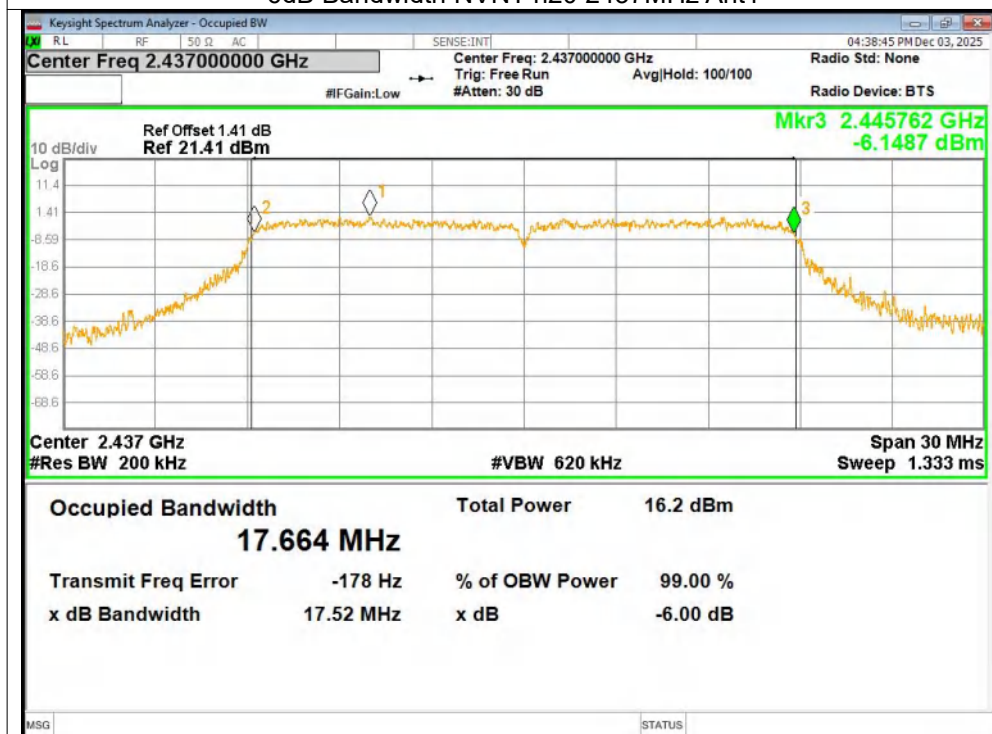
-6dB Bandwidth NVNT n20 2412MHz Ant1**-6dB Bandwidth NVNT n20 2437MHz Ant1**

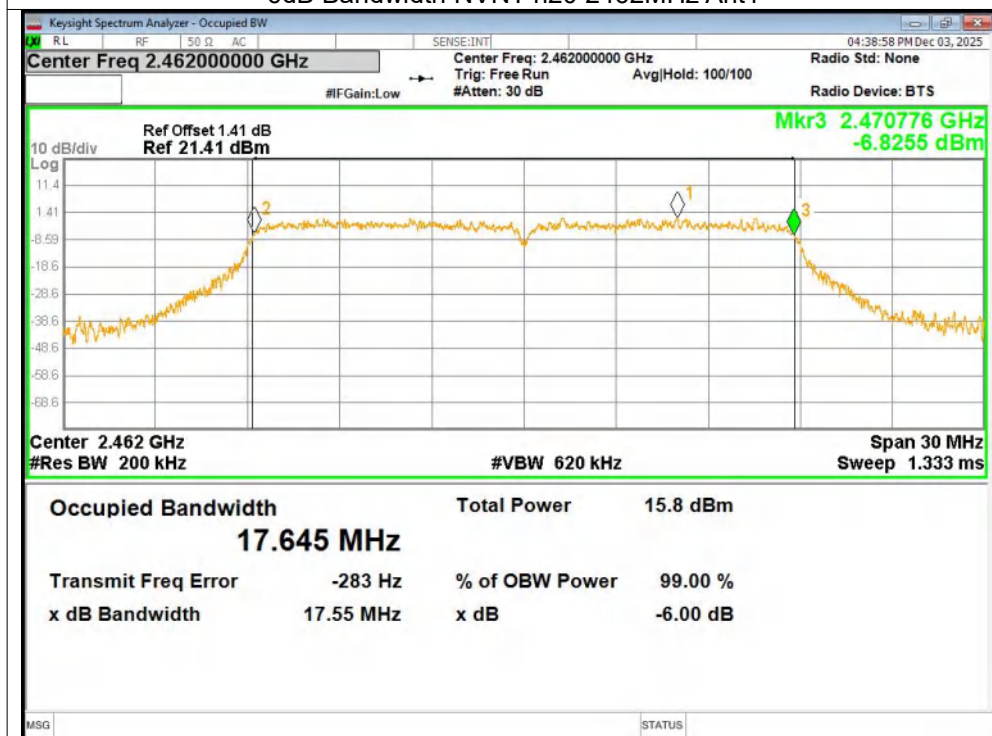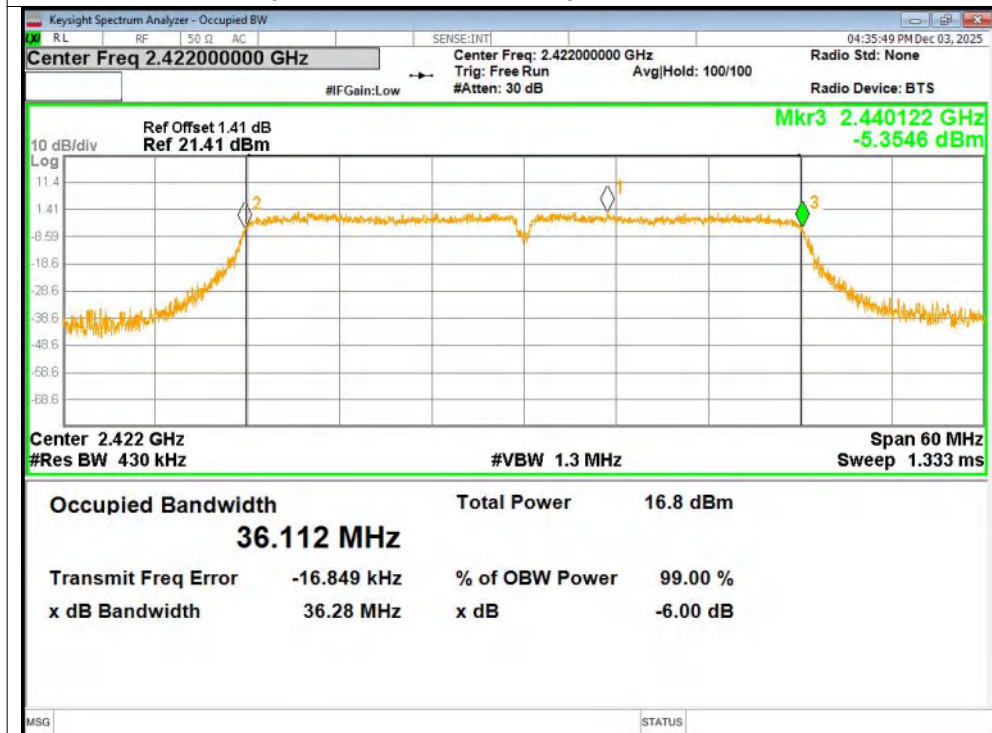-6dB Bandwidth NVNT n20 2462MHz Ant1**-6dB Bandwidth NVNT n40 2422MHz Ant1**

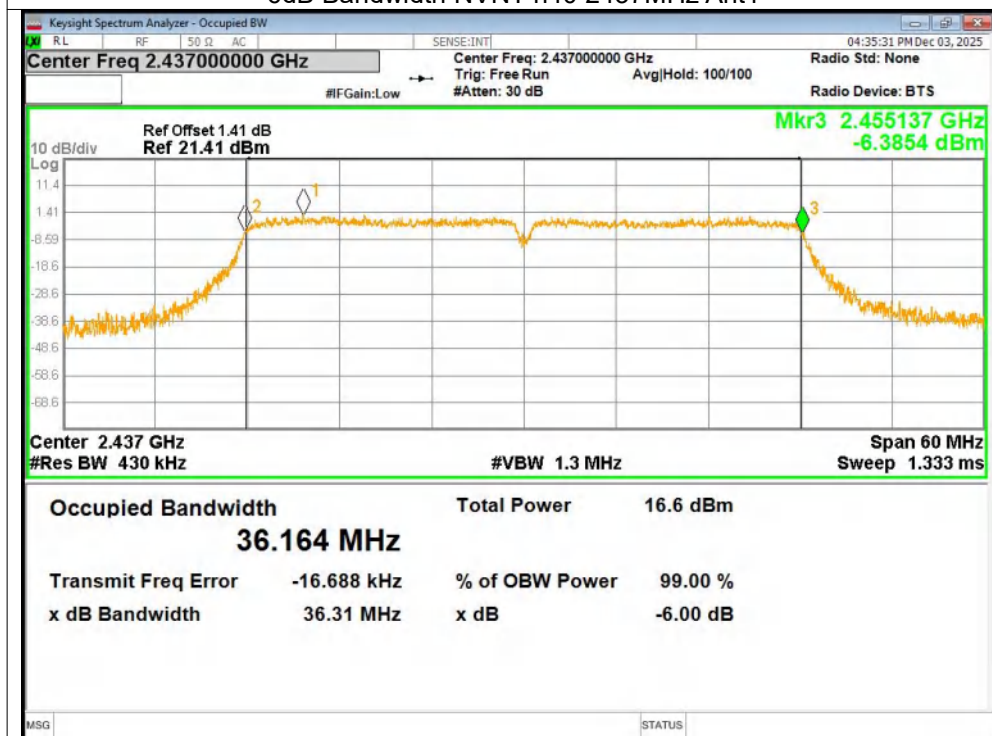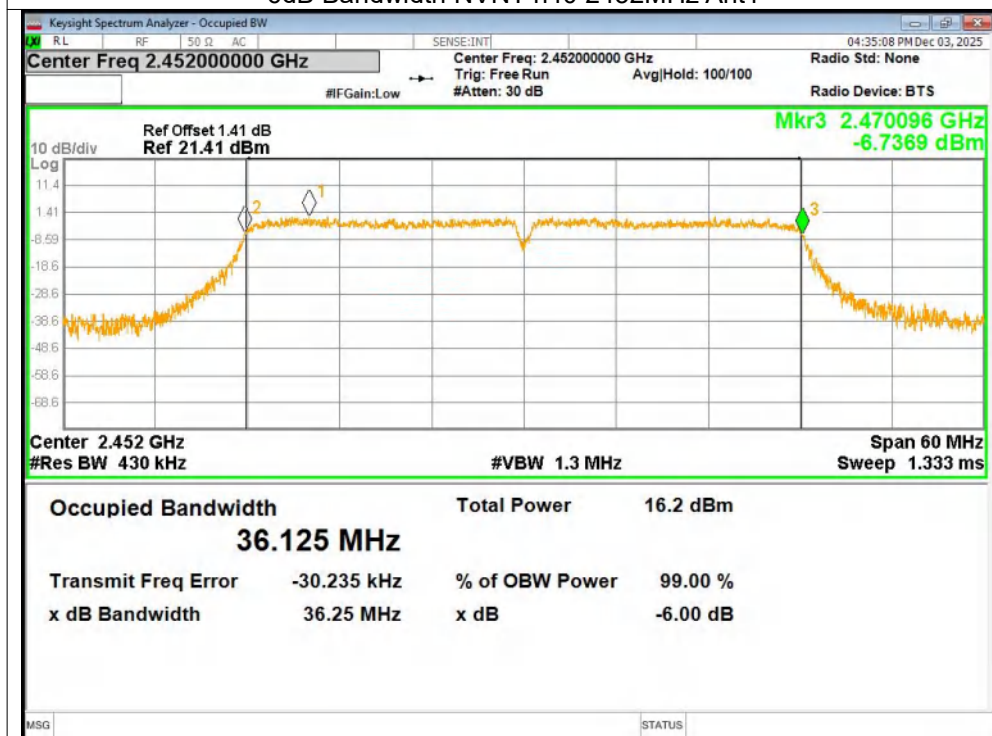
-6dB Bandwidth NVNT n40 2437MHz Ant1**-6dB Bandwidth NVNT n40 2452MHz Ant1**

Occupied Channel Bandwidth


Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
b	2412	Ant1	14.963
b	2437	Ant1	14.995
b	2462	Ant1	14.973
g	2412	Ant1	16.543
g	2437	Ant1	16.566
g	2462	Ant1	16.502
n20	2412	Ant1	17.662
n20	2437	Ant1	17.637
n20	2462	Ant1	17.607
n40	2422	Ant1	36.171
n40	2437	Ant1	36.176
n40	2452	Ant1	36.117

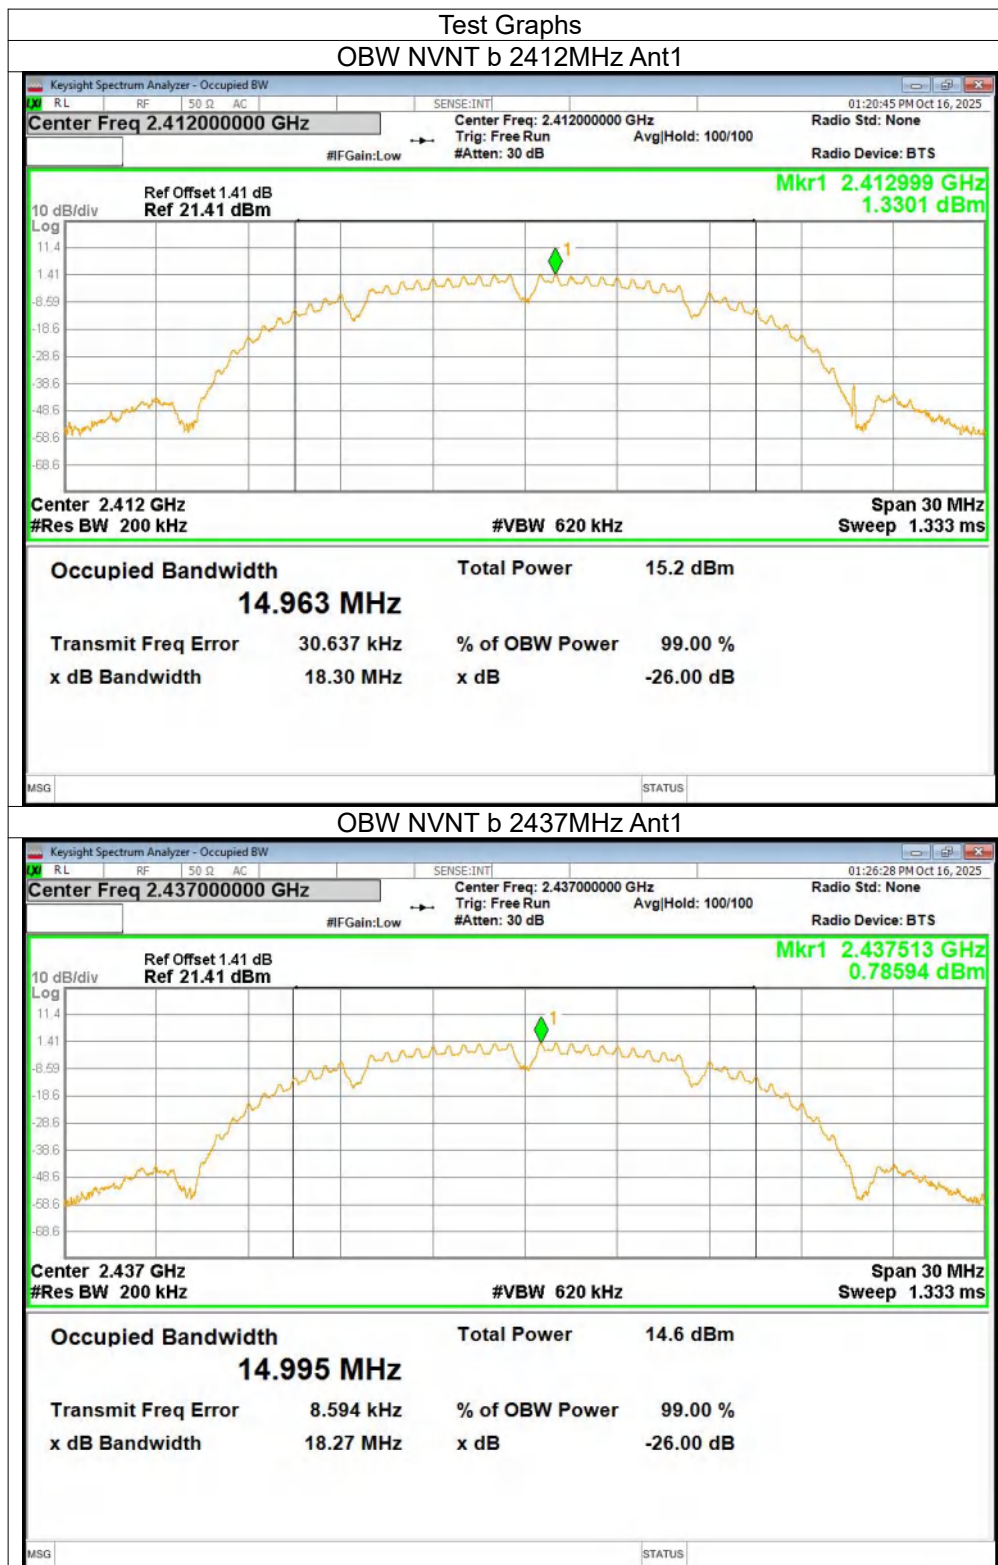


OBW NVNT b 2462MHz Ant1

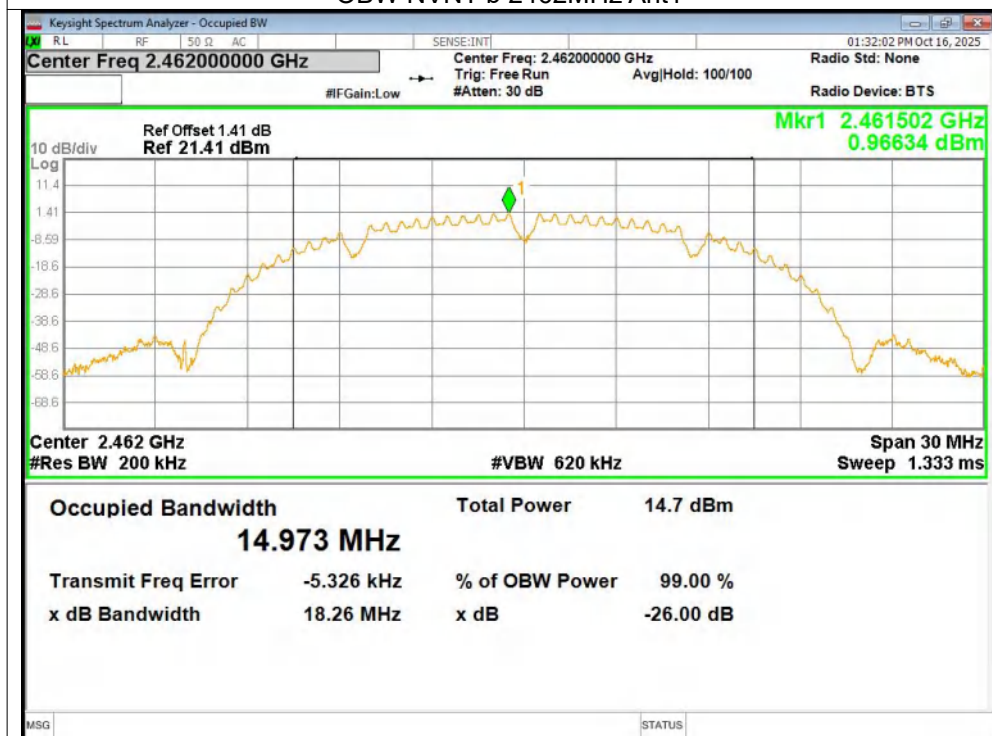


OBW NVNT g 2412MHz Ant1

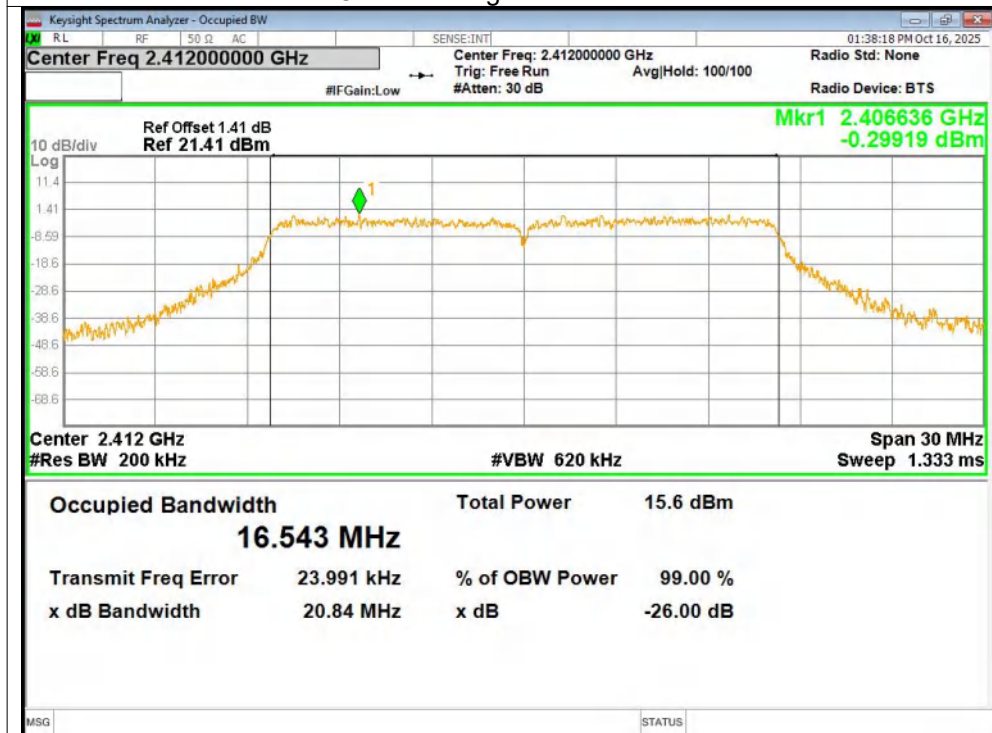


OBW NVNT g 2437MHz Ant1

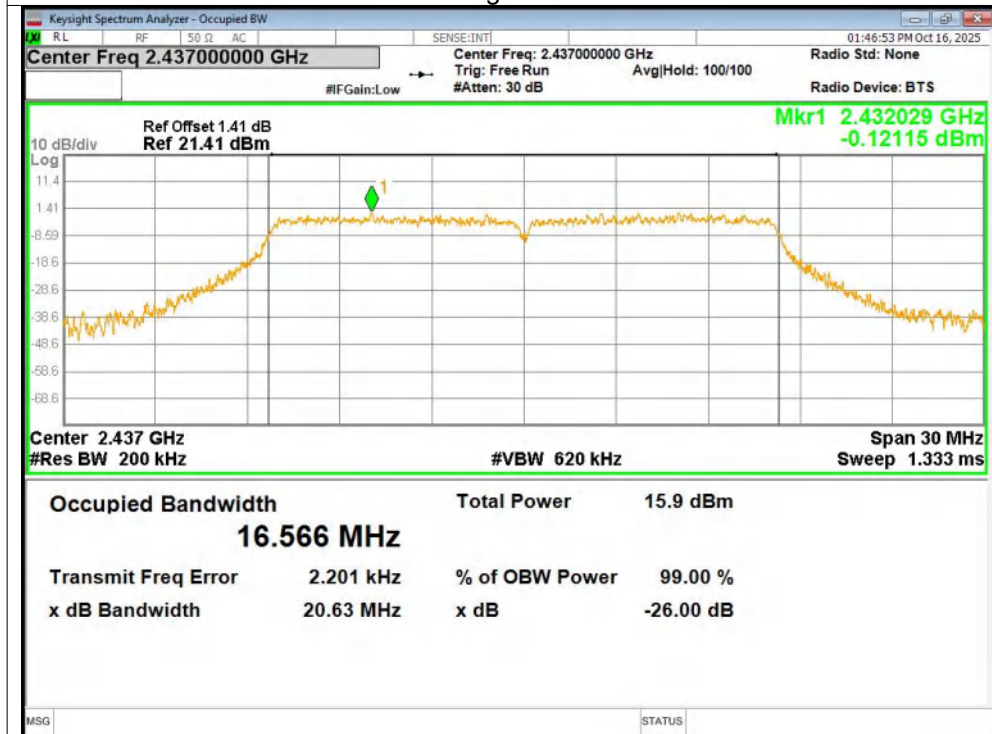


OBW NVNT g 2462MHz Ant1

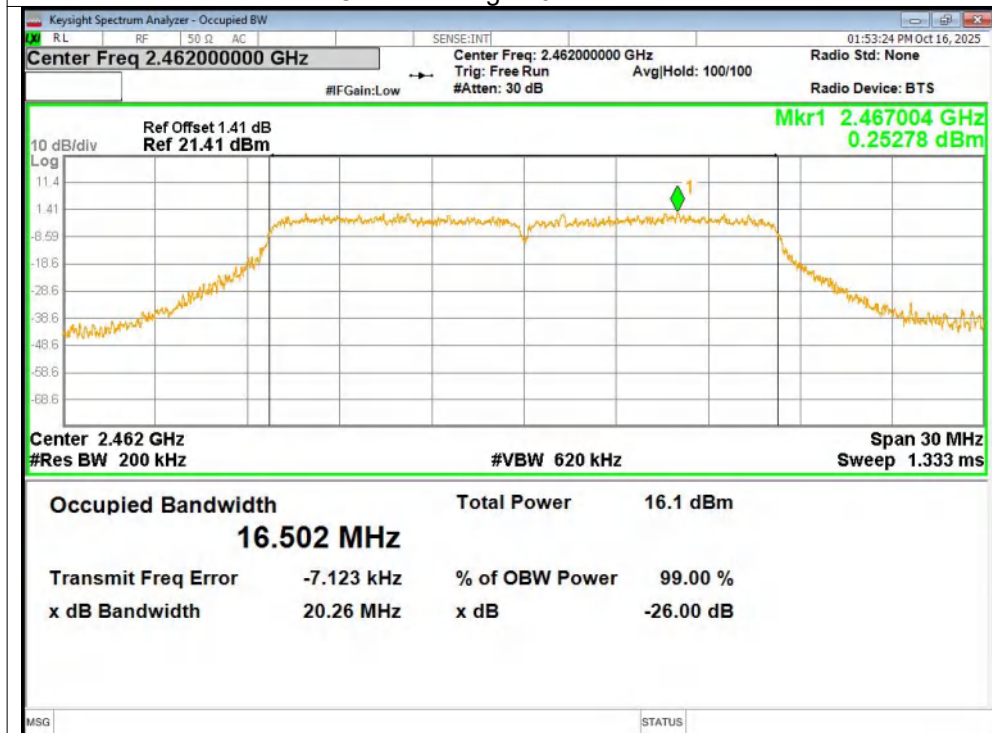


OBW NVNT n20 2412MHz Ant1

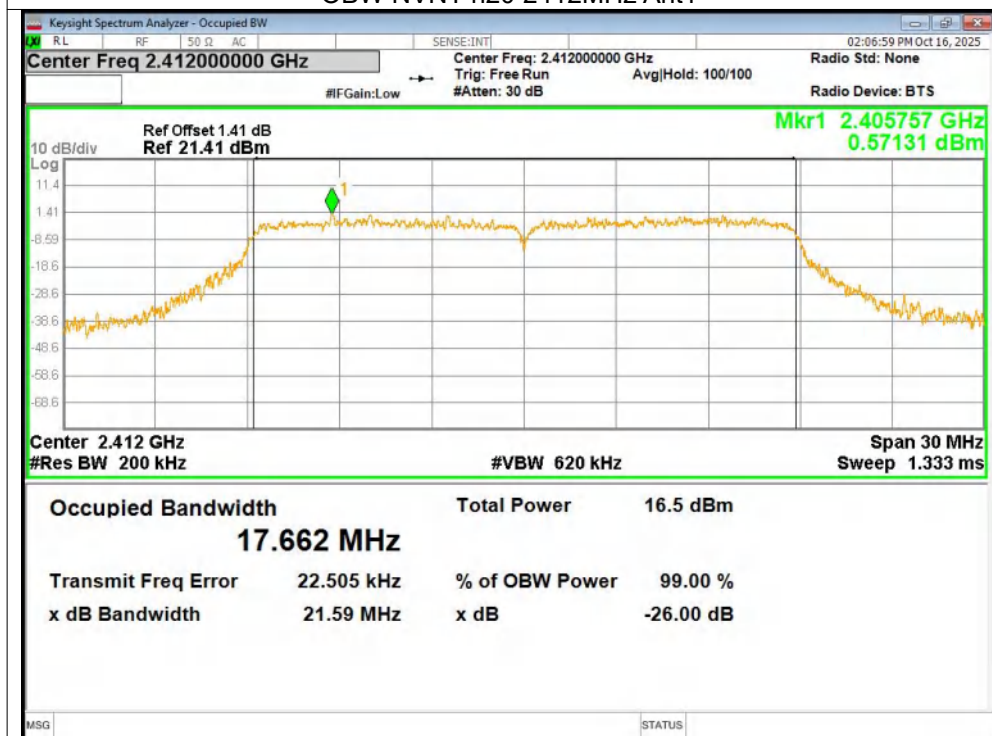


OBW NVNT n20 2437MHz Ant1

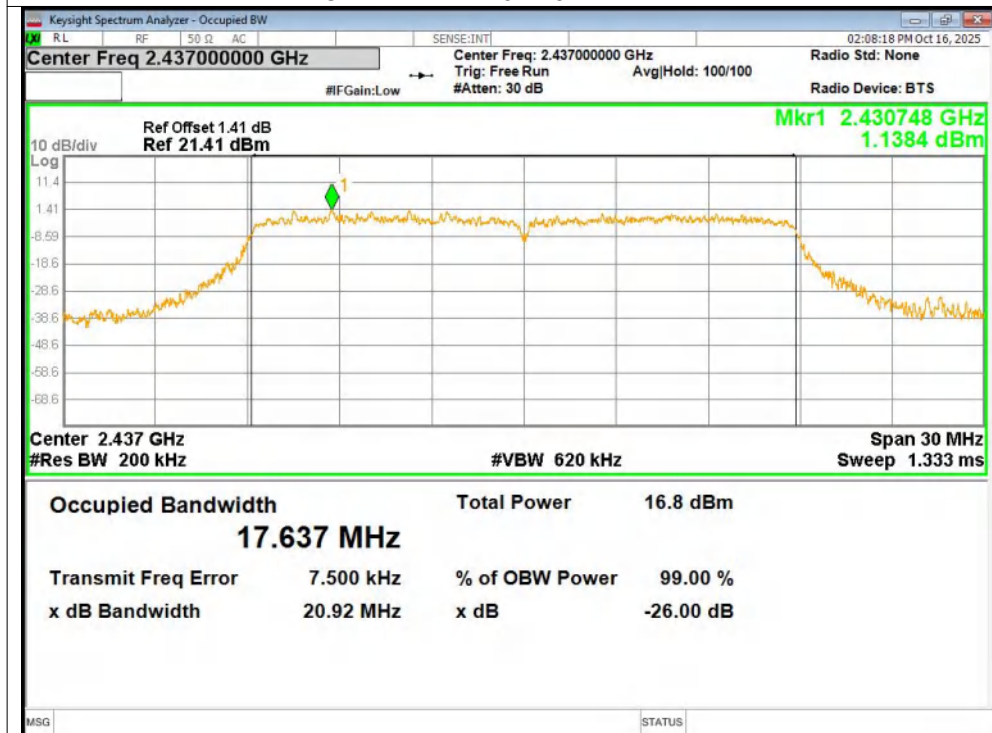


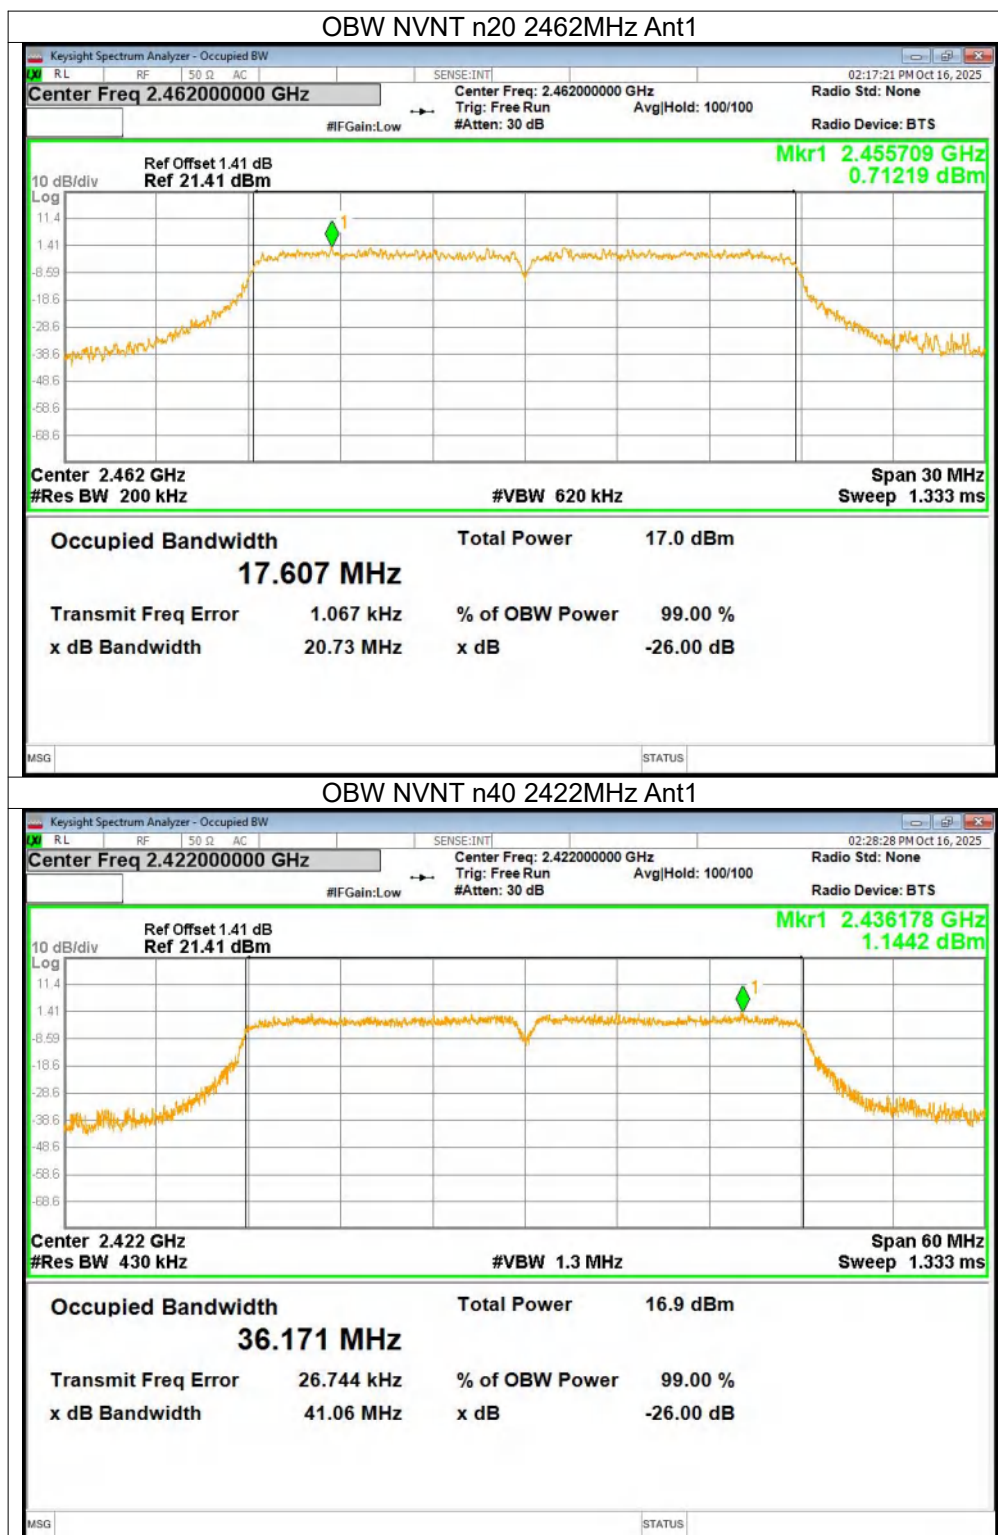

OBW NVNT n40 2437MHz Ant1

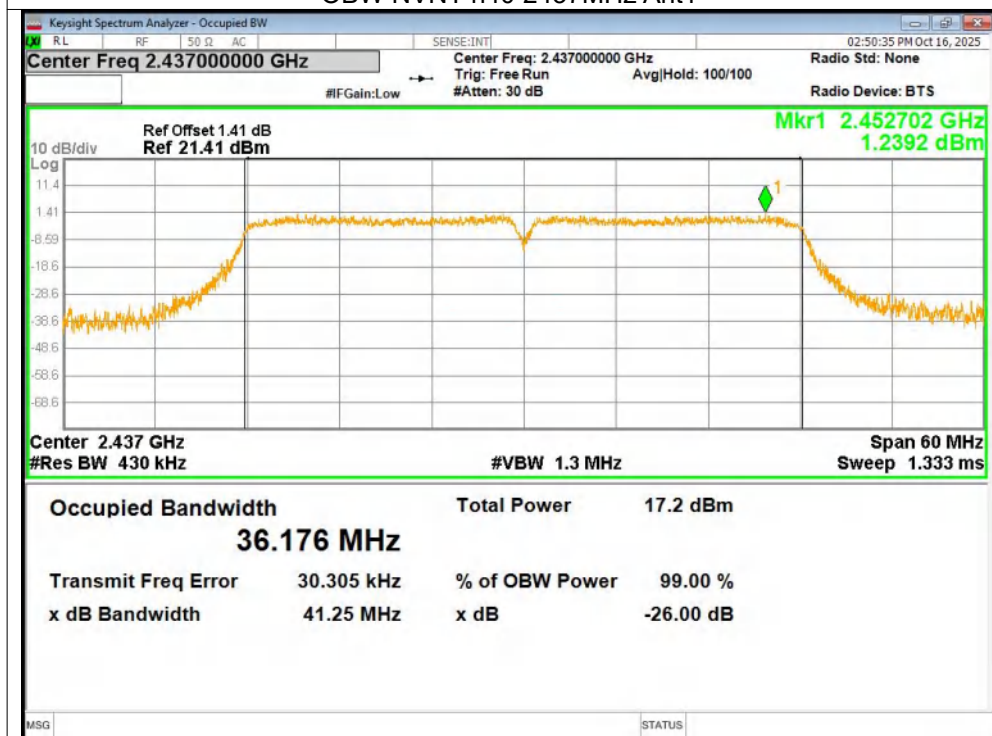

OBW NVNT n40 2452MHz Ant1

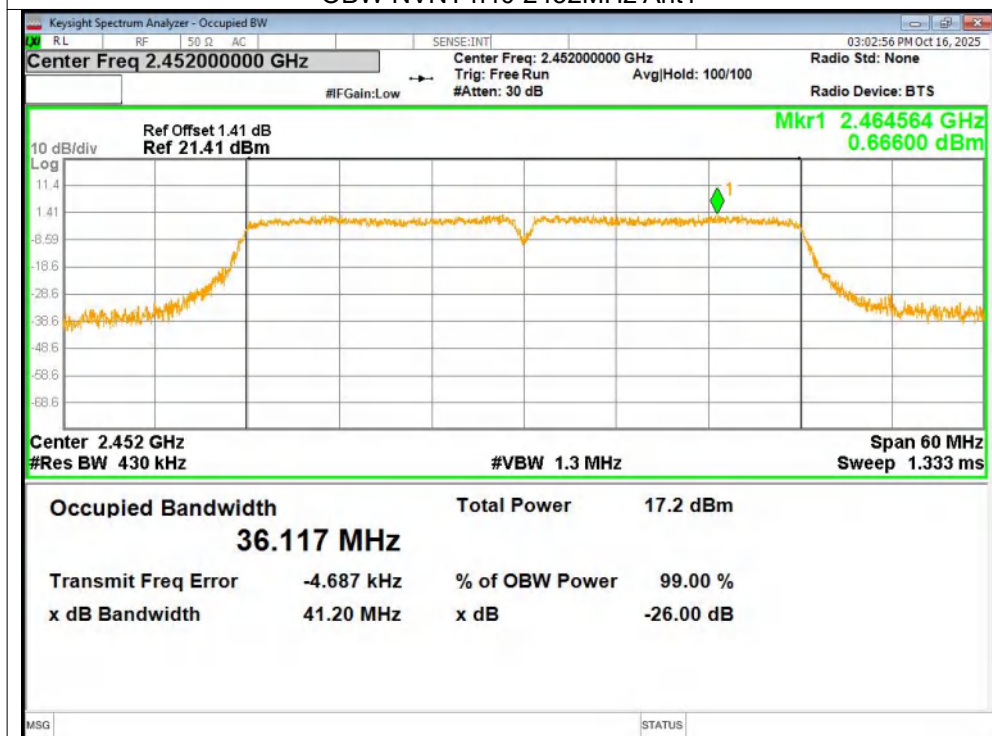


9. Duty Cycle

Mode	Frequency (MHz)	Ton ms	Total ms	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
b	2412	12.42	12.46	99.68	0	0.08
b	2437	12.42	12.49	99.44	0	0.08
b	2462	12.42	12.5	99.36	0	0.08
g	2412	2.06	2.23	92.38	0.34	0.48
g	2437	2.06	2.16	95.37	0.21	0.49
g	2462	2.07	2.16	95.83	0.18	0.49
n20	2412	1.93	2.02	95.54	0.2	0.52
n20	2437	1.92	1.98	96.97	0.13	0.52
n20	2462	1.92	1.96	97.96	0.09	0.52
n40	2422	0.95	0.99	95.96	0.18	1.06
n40	2437	0.95	1	95.00	0.22	1.06
n40	2452	0.95	1.02	93.14	0.31	1.05


Note:

1. Duty Cycle = T_{on} / T_{total}


2. Correction Factor = $10 \log (1 / \text{Duty Cycle})$.

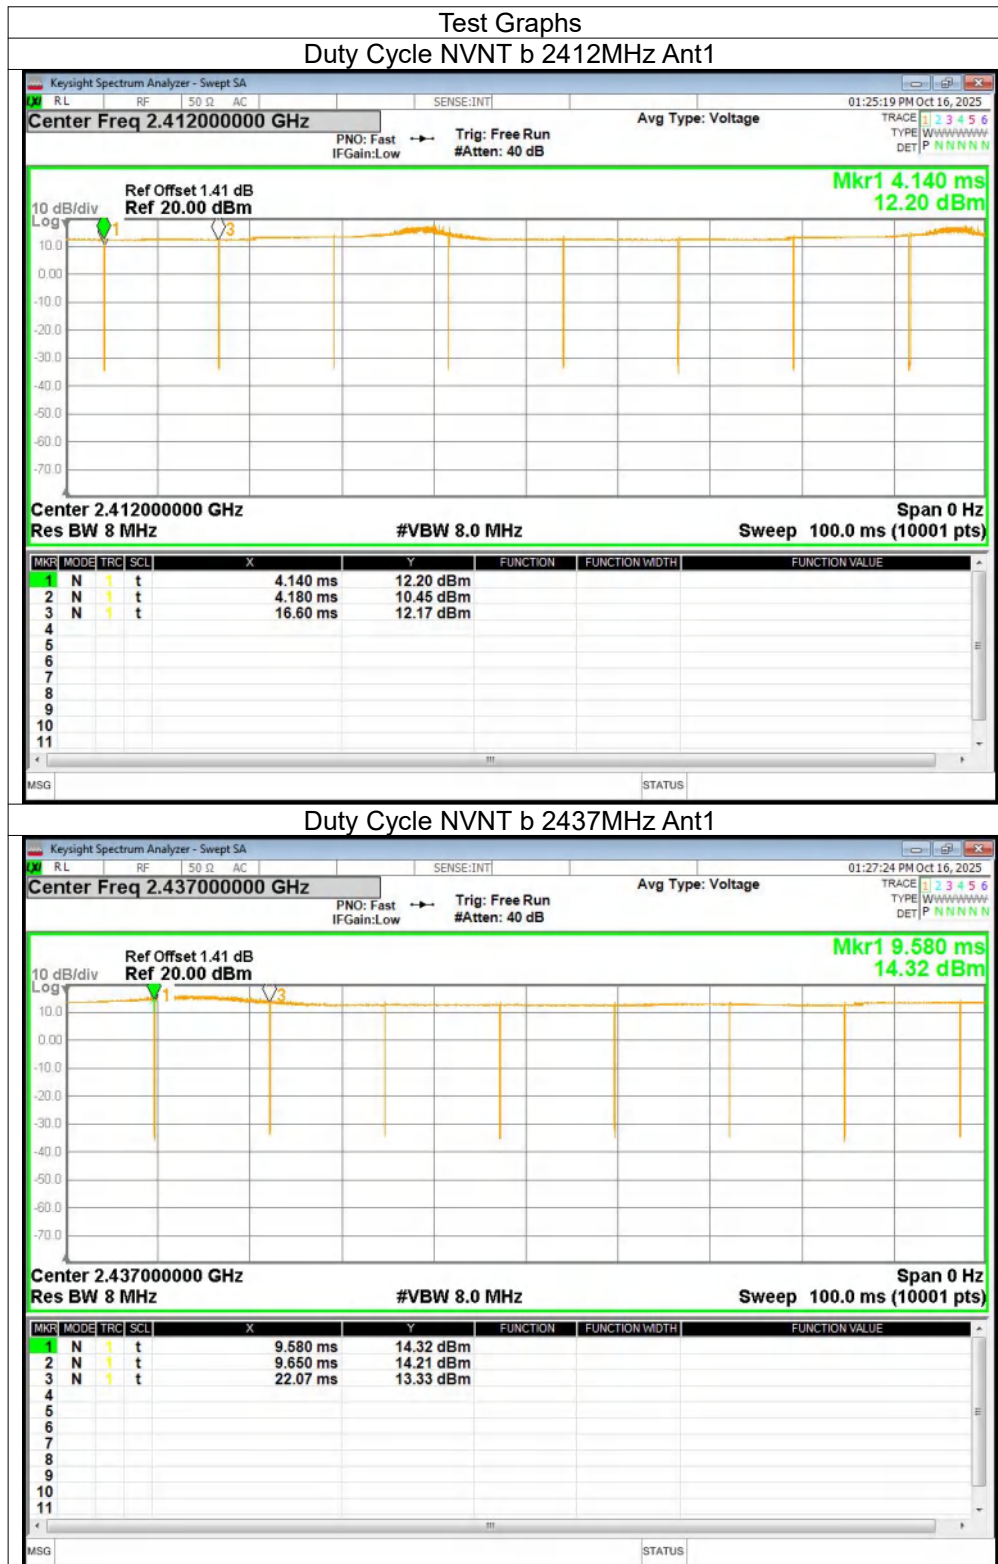


Duty Cycle NVNT b 2462MHz Ant1

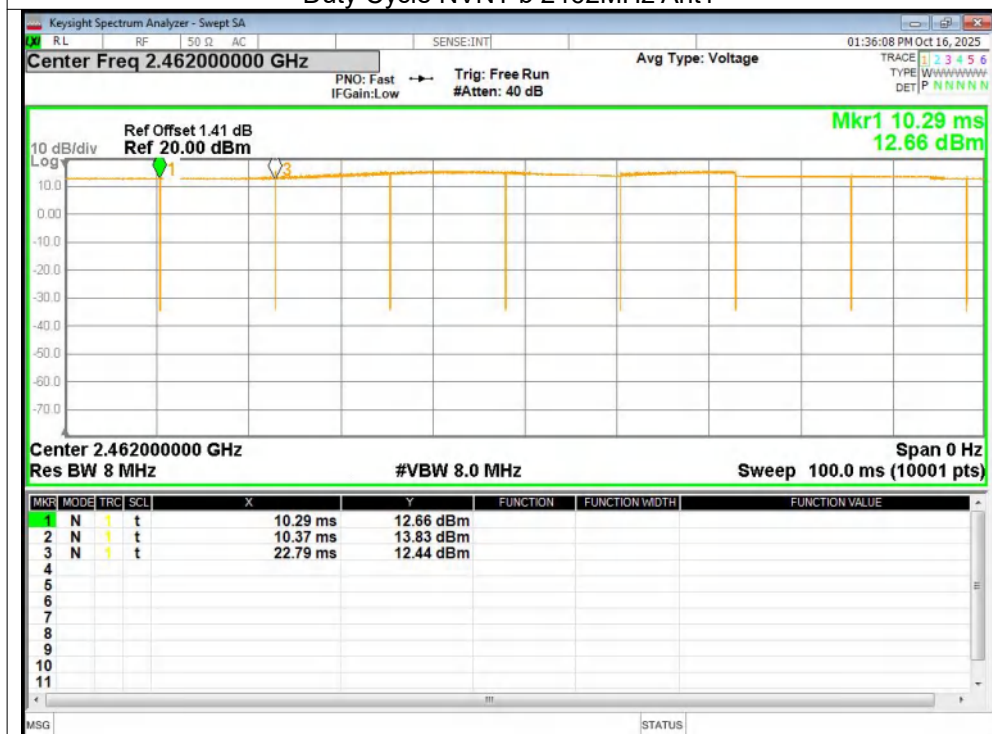


Duty Cycle NVNT g 2412MHz Ant1

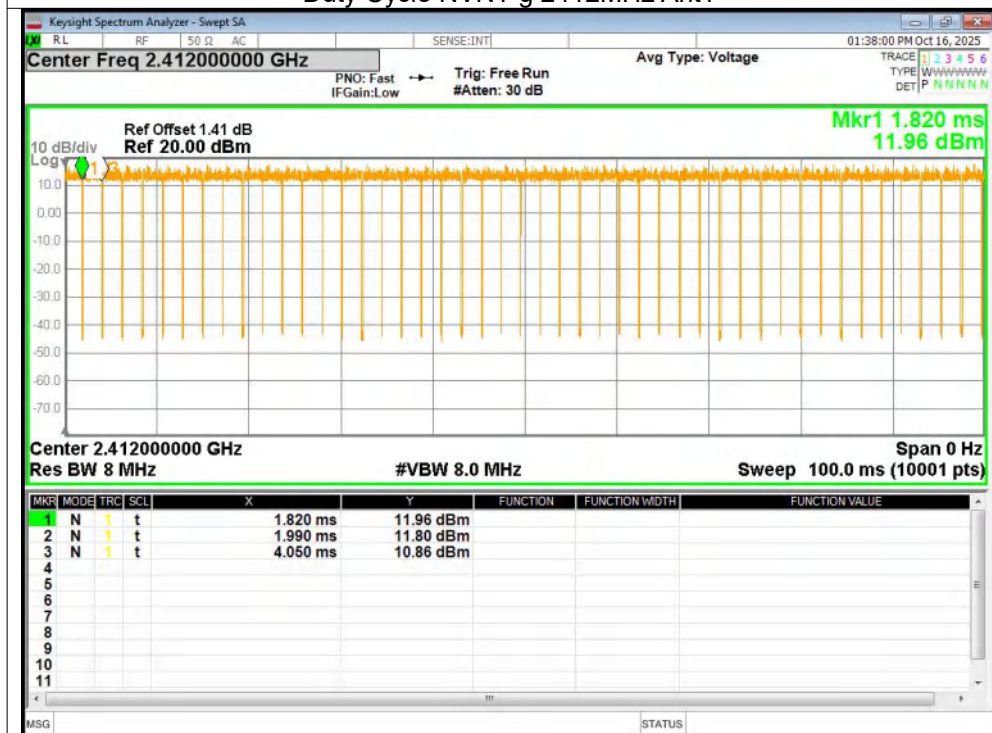


Duty Cycle NVNT g 2437MHz Ant1

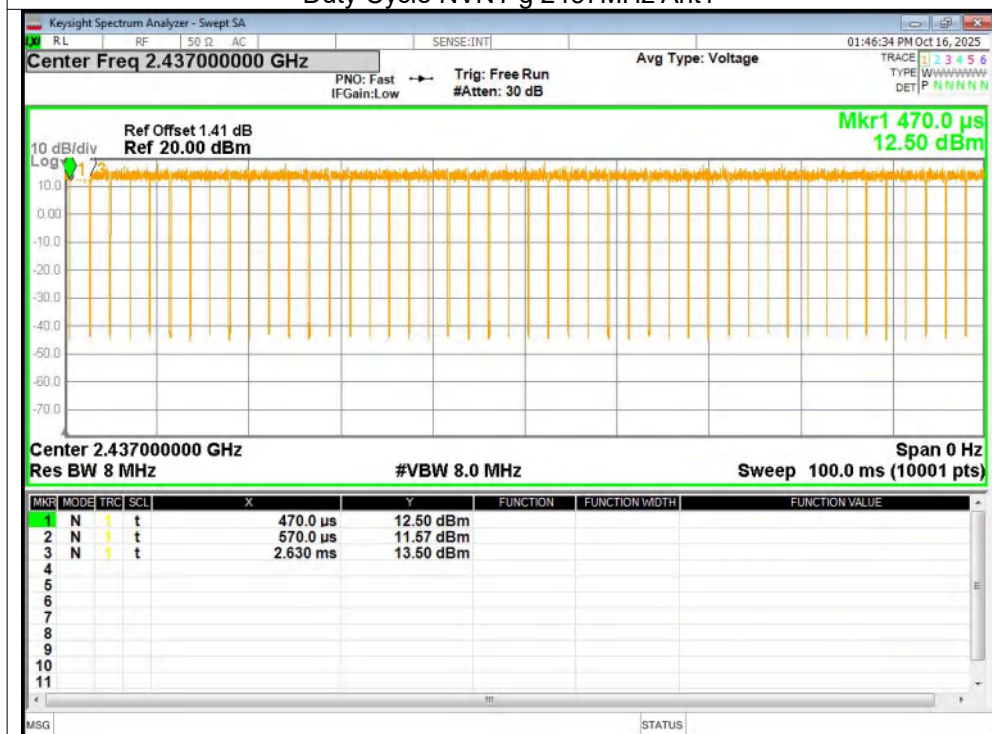


Duty Cycle NVNT g 2462MHz Ant1

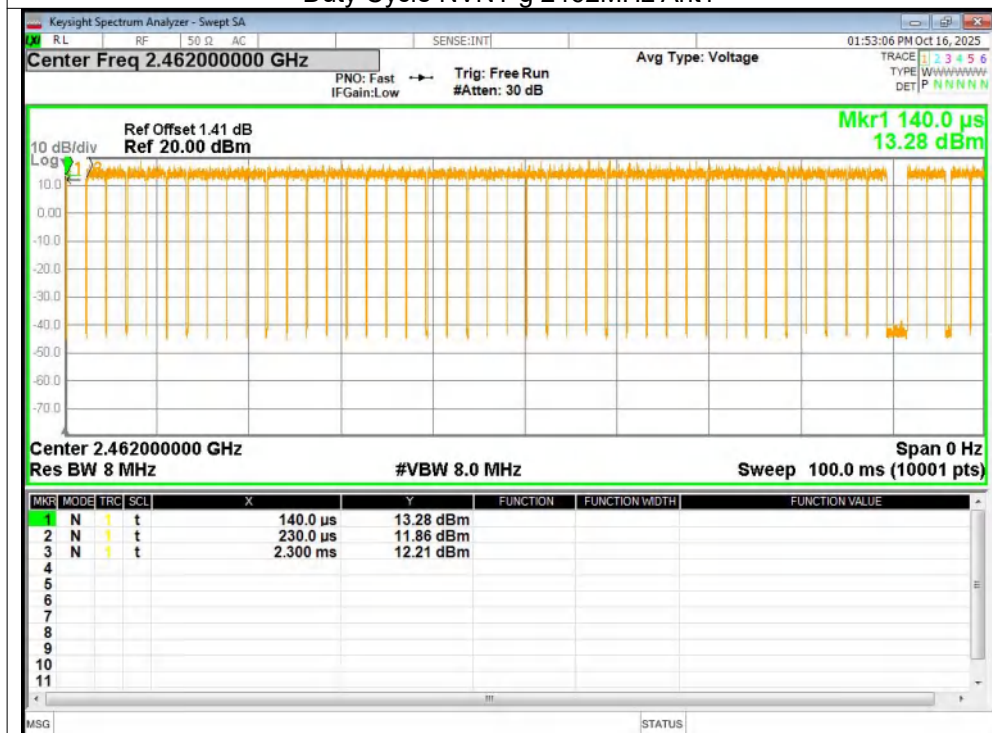


Duty Cycle NVNT n20 2412MHz Ant1

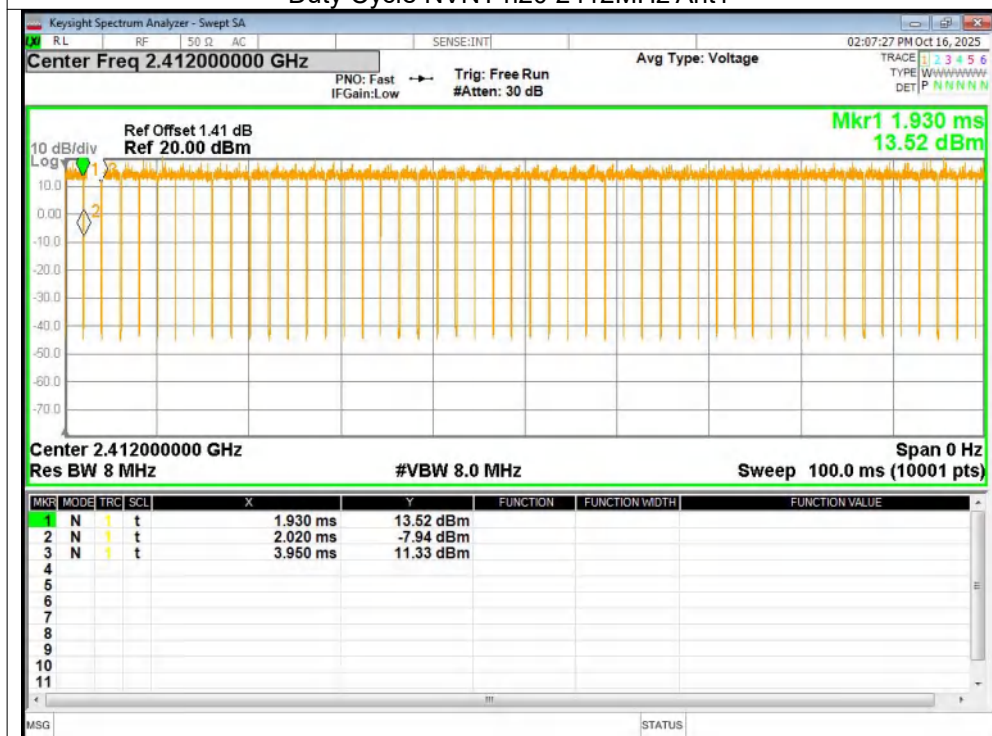


Duty Cycle NVNT n20 2437MHz Ant1

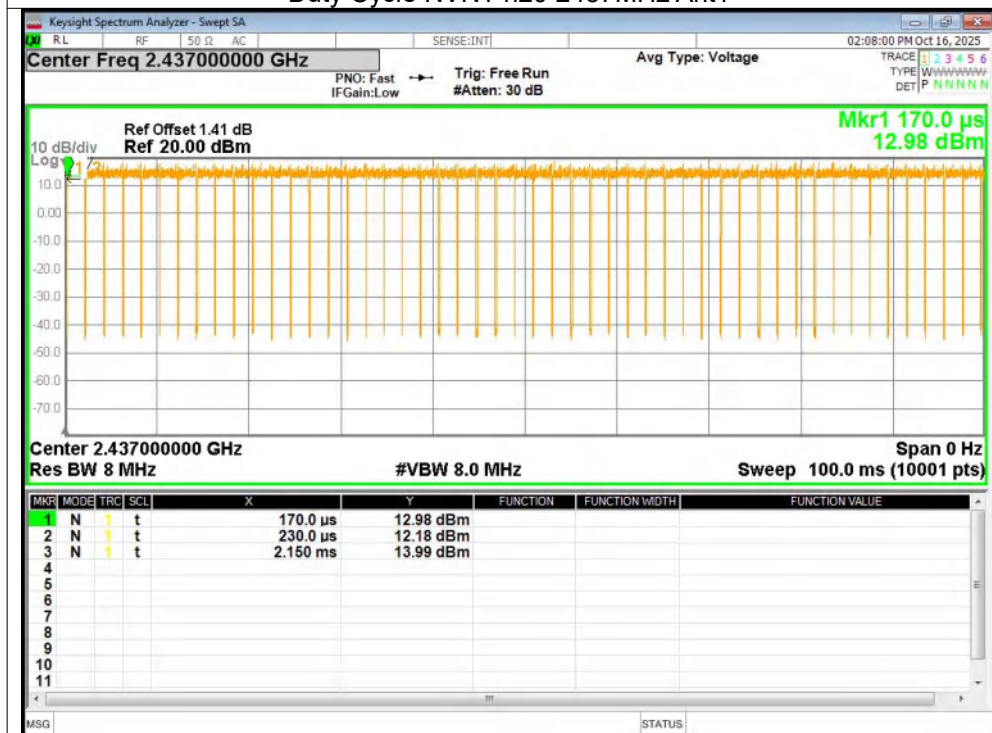


Duty Cycle NVNT n20 2462MHz Ant1

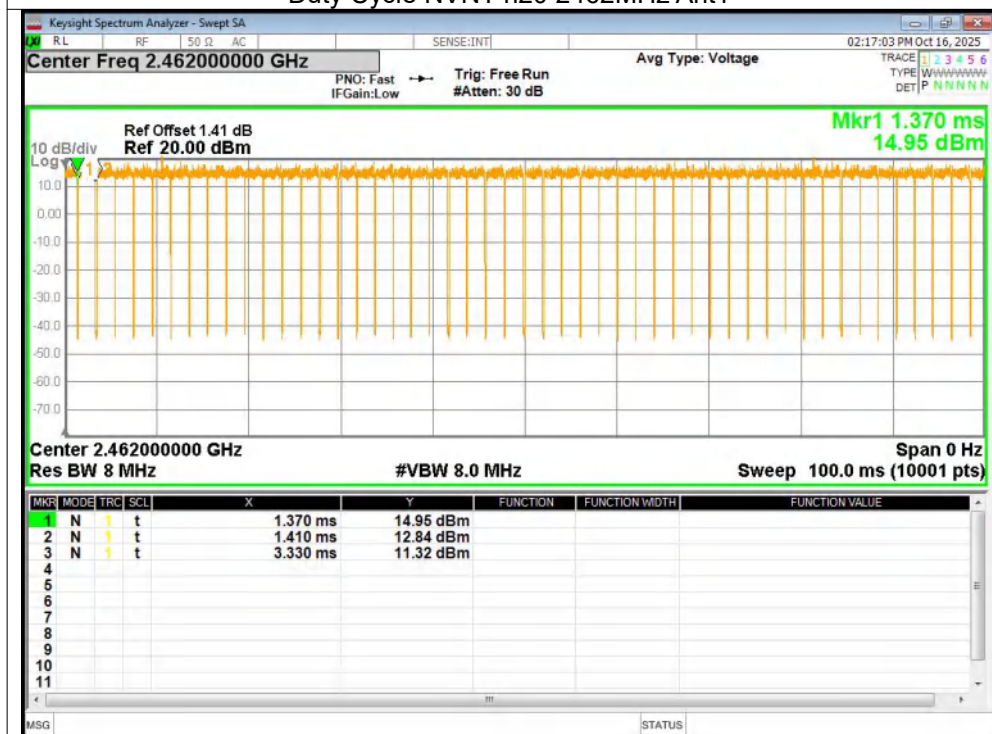


Duty Cycle NVNT n40 2422MHz Ant1

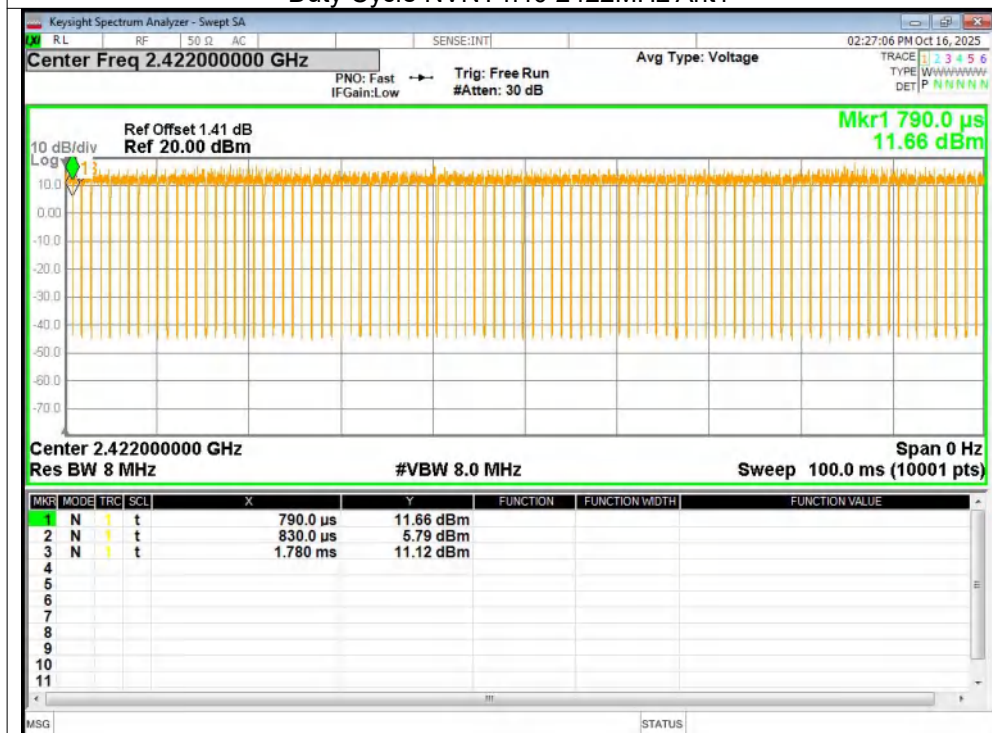

Duty Cycle NVNT n40 2437MHz Ant1

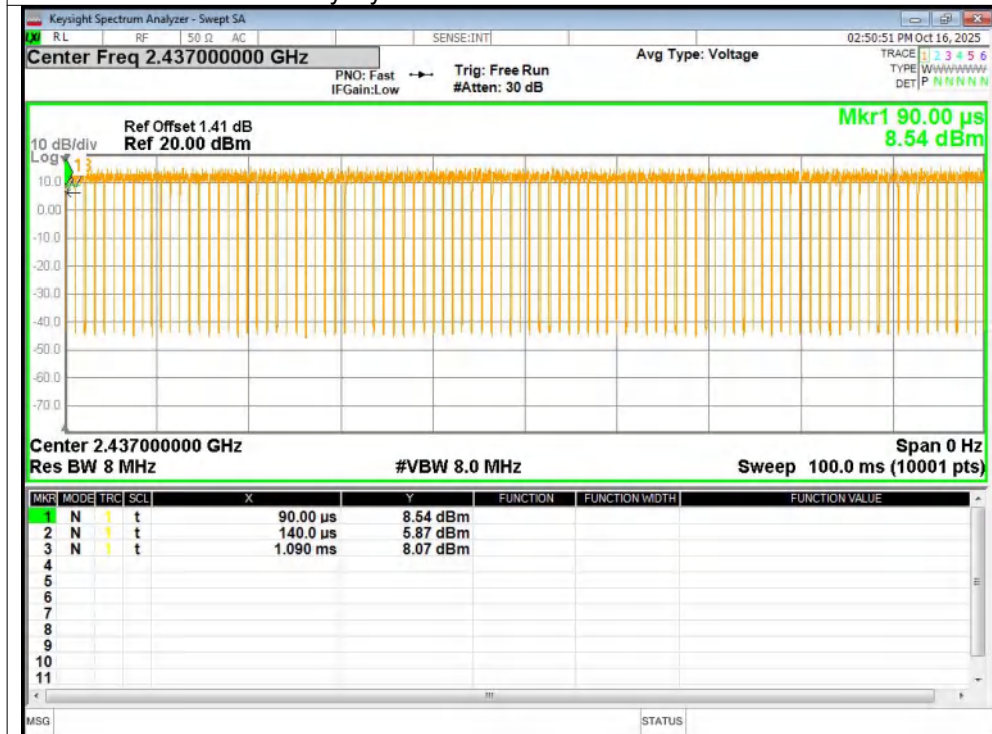


Duty Cycle NVNT n40 2452MHz Ant1

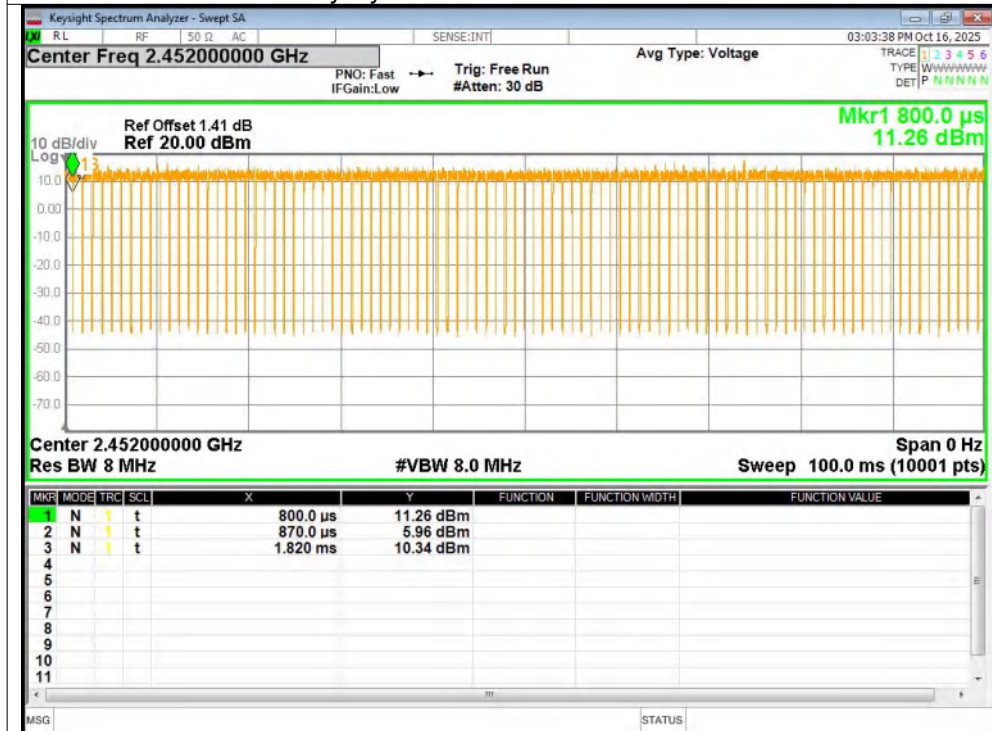

10. Band Edge Test

10.1. Block Diagram of Test Setup

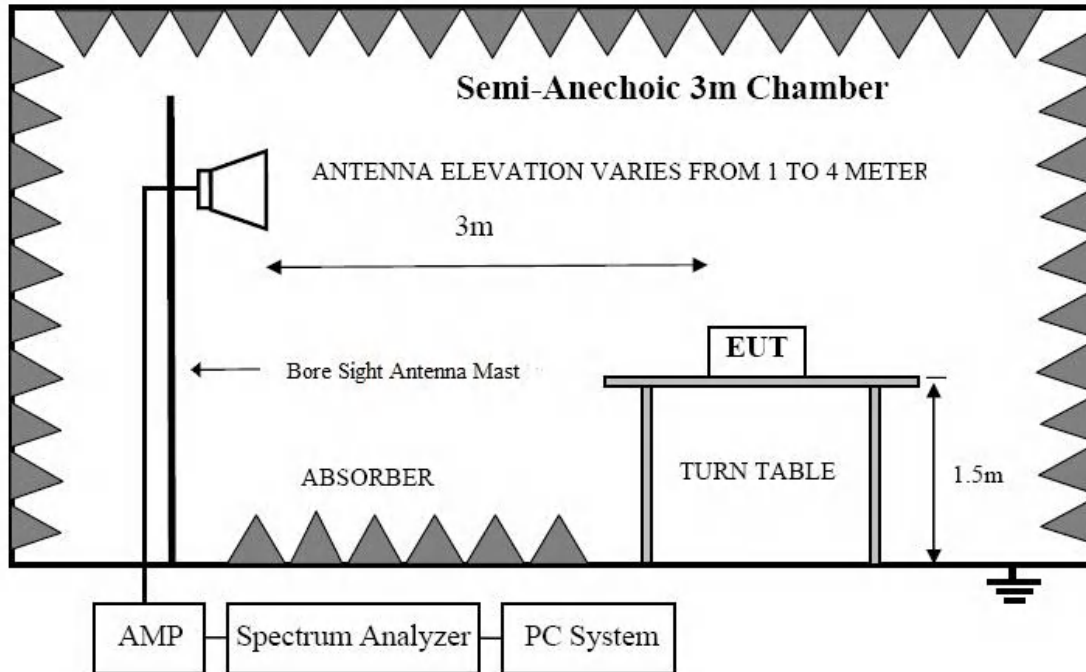

10.2. Test Limit

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Please refer RSS-GEN & FCC PART 15.247

10.3. Test Procedure

Refer to ANSI C 63.10, Clause 6.10.

All restriction band and non- restriction band have been tested, only worse case is reported.

Details see the KDB558074 D01 Meas Guidance v05r02

1. Put the EUT on a 1.5m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission
2. Check the spurious emissions out of band.
3. RBW 1MHz, VBW 3MHz, peak detector for peak value, RBW 1MHz, VBW 10Hz, RMS detector for AV value.

10.4. Test Results

Test Date : 2025.10.20					Temperature : 24.2℃			
Test Engineer : Felix Pang					Humidity : 56.2%			
Test Results : PASS								
Frequency Range : 2310MHz~2410MHz								
Test Mode : IEEE 802.11b TX 2412MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	62.19	-20.45	42.08	74	-31.92	Peak
2	2390	H	--	-20.45	--	54	-11.92	Avg
3	2400	H	62.25	-20.41	41.71	74	-32.29	Peak
4	2400	H	--	-20.41	--	54	-12.29	Avg
1	2390	V	62.22	-20.45	42.53	74	-31.47	Peak
2	2390	V	--	-20.45	--	54	-11.47	Avg
3	2400	V	62.45	-20.41	41.7	74	-32.3	Peak
4	2400	V	--	-20.41	--	54	-12.3	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : IEEE 802.11b TX 2462MHz								
1	2483.5	H	62.17	-20.15	42.36	74	-31.64	Peak
2	2483.5	H	--	-20.15	--	54	-11.64	Avg
1	2483.5	V	62.93	-20.15	42.01	74	-31.99	Peak
2	2483.5	V	--	-20.15	--	54	-11.99	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

Frequency Range : 2310MHz~2410MHz								
Test Mode : IEEE 802.11g TX 2412MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	62.96	-20.45	41.59	74	-32.41	Peak
2	2390	H	--	-20.45	--	54	-12.41	Avg
3	2400	H	62.67	-20.41	41.65	74	-32.35	Peak
4	2400	H	--	-20.41	--	54	-12.35	Avg
1	2390	V	62.77	-20.45	42.34	74	-31.66	Peak
2	2390	V	--	-20.45	--	54	-11.66	Avg
3	2400	V	62.59	-20.41	41.86	74	-32.14	Peak
4	2400	V	--	-20.41	--	54	-12.14	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : IEEE 802.11g TX 2462MHz								
1	2483.5	H	62.82	-20.15	42.52	74	-31.48	Peak
2	2483.5	H	--	-20.15	--	54	-11.48	Avg
1	2483.5	V	62.62	-20.15	42.14	74	-31.86	Peak
2	2483.5	V	--	-20.15	--	54	-11.86	Avg
Note:	1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.							

Frequency Range : 2310MHz~2410MHz								
Test Mode : IEEE 802.11n/HT20 TX 2412MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	62.85	-20.45	41.95	74	-32.05	Peak
2	2390	H	--	-20.45	--	54	-12.05	Avg
3	2400	H	62.13	-20.41	41.8	74	-32.2	Peak
4	2400	H	--	-20.41	--	54	-12.2	Avg
1	2390	V	62.39	-20.45	41.79	74	-32.21	Peak
2	2390	V	--	-20.45	--	54	-12.21	Avg
3	2400	V	62.14	-20.41	42	74	-32	Peak
4	2400	V	--	-20.41	--	54	-12	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : IEEE 802.11n/HT20 TX 2462MHz								
1	2483.5	H	62.46	-20.15	42.19	74	-31.81	Peak
2	2483.5	H	--	-20.15	--	54	-11.81	Avg
1	2483.5	V	62.45	-20.15	42.55	74	-31.45	Peak
2	2483.5	V	--	-20.15	--	54	-11.45	Avg
Note:	1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor. Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.							

Frequency Range : 2310MHz~2410MHz								
Test Mode : IEEE 802.11n/HT40 TX 2422MHz								
No.	Freq MHz	Polarity	Reading (dBuV/m)	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin	Remark
1	2390	H	62.14	-20.45	42.38	74	-31.62	Peak
2	2390	H	--	-20.45	--	54	-11.62	Avg
3	2400	H	62.34	-20.41	42.4	74	-31.6	Peak
4	2400	H	--	-20.41	--	54	-11.6	Avg
1	2390	V	62.65	-20.45	42.19	74	-31.81	Peak
2	2390	V	--	-20.45	--	54	-11.81	Avg
3	2400	V	62.97	-20.41	42.45	74	-31.55	Peak
4	2400	V	--	-20.41	--	54	-11.55	Avg
Frequency Range : 2450MHz~2550MHz								
Test Mode : IEEE 802.11n/HT40 TX 2452MHz								
1	2483.5	H	62.21	-20.15	42.29	74	-31.71	Peak
2	2483.5	H	--	-20.15	--	54	-11.71	Avg
1	2483.5	V	62.82	-20.15	42.13	74	-31.87	Peak
2	2483.5	V	--	-20.15	--	54	-11.87	Avg
Note: 1. Means other frequency and mode comply with standard requirements and at least have 20dB margin. 2. Correct Factor=Cable Loss+ Antenna Factor-Amplifier Gain. Result=Reading + Correct Factor, Margin= Result-Limit. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.								

11. Frequency stability

11.1. Test limit


Please refer section RSS-Gen.

Regulation RSS-Gen If the frequency stability of the licence-exempt radio apparatus is not specified in the applicable RSS, the fundamental emissions of the radio apparatus should be kept within at least the central 80% of its permitted operating frequency band in order to minimize the possibility of out-of-band operation. In addition, its occupied bandwidth shall be entirely outside the restricted bands and the prohibited TV bands of 54-72 MHz, 76-88 MHz, 174-216 MHz, and 470-602 MHz, unless otherwise indicated.

11.2. Test Procedure

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.3. Test Setup

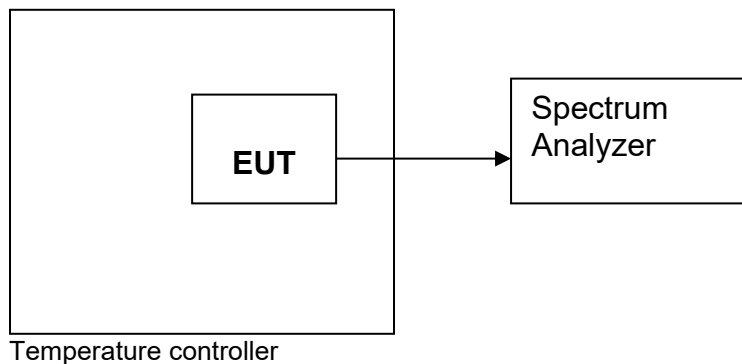

11.4. Test Results

Not Applicable.

12. Antenna Requirement

12.1. Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

12.2. Antenna Connected Construction

The antenna connector is unique antenna and no consideration of replacement. Please see EUT photo for details.

12.3. Results

The EUT antenna is FPC antenna. It complies with the standard requirement.

13. Photos of test setup

Reference to the **appendix I Test Setup Photo** for details.

14. Photos of EUT

Reference to the **appendix II external photos** and **appendix III internal photos** for details.

----- END OF REPORT-----