



Thank you for choosing our product!
We sincerely hope that wiarPOS will enable smart payments and enhance the convenience of your daily business.

Before powering up the device, please check the terminal and accessories as follows:




- 1 Q3
- 2 USB Cable
- 3 5V 2A Adaptor

Please contact your product provider if anything is missing.

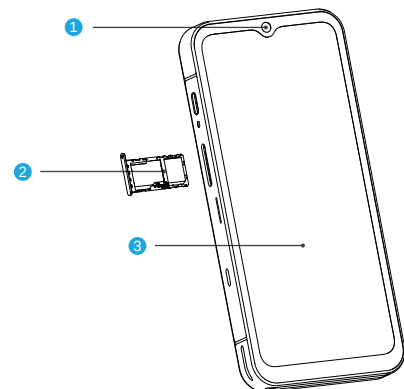


- 1 Camera
- 2 SIM Card Slot + TF/SIM Card Slot
- 3 PIN on Glass / Contactless on Glass

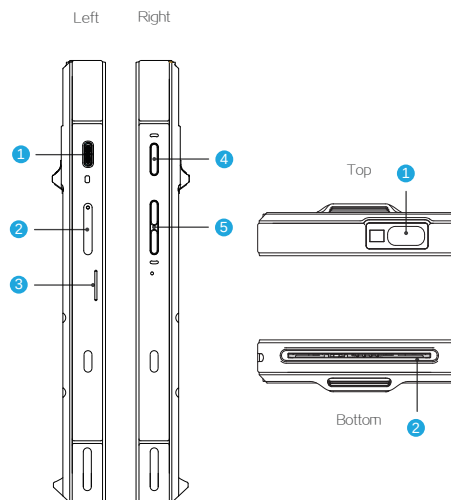


- 1 USB Type-C
- 2 SIM Card Slot + TF/SIM Card Slot
- 3 Speaker
- 4 Power Key
- 5 Volume Key
- 1 Scanner (Optional)
- 2 IC Card Reader


Q3 User Manual

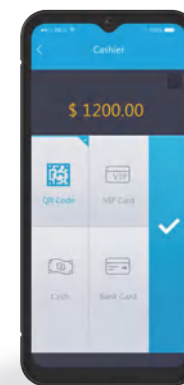

www.wizarpos.com

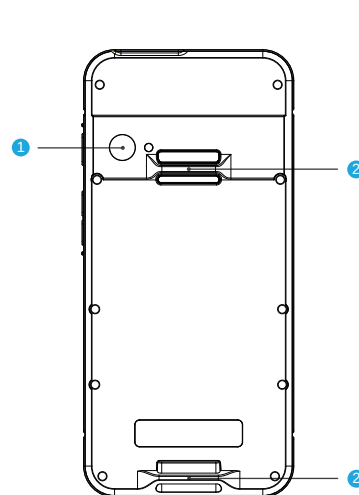

- 1 Camera
- 2 Hand Strap Mount

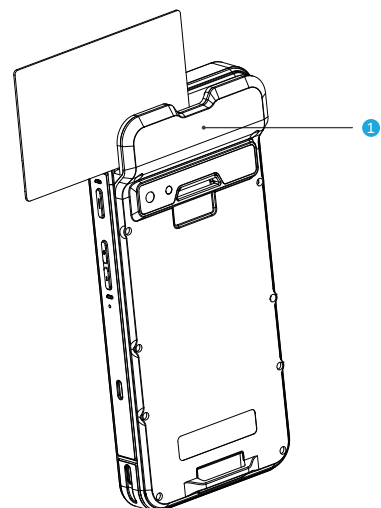

- 1 Magstripe Reader (Optional)

Specification	Detailed Description
Software Platform	Secure Android 7.1
Processor	Quad-Core @ 2.0GHz
Memory	2GB RAM + 32GB Flash, 4GB RAM + 32GB Flash (Optional)
Display	6.5" multi-touch color LCD panel (720 x 1600) Contactless On Screen
Camera	Front-facing: 2MP FF or Scanner Rear: 5MP AF
Scanner (Optional)	PDF 417, QR Code, Data Matrix, EAN-8, EAN-13, Code 11, Code 39, Code 128
Certification	PCI PTS 6.x, SRED, EMV L1 & L2, EMV CL L1, TQM, PayPass, PayWave, ExpressPay, D-PAS, Anatel, Interac Flash L2, Rupay, MIR, Jspeedy, RoHS, FCC, CE
Card Readers	NFC contactless: ISO 14443 Type A & B, MIFARE, Sony Felica Chip card reader: ISO 7816 Magstripe reader (Optional): ISO 7811, Track 1/2/3, bi-direction
Slots	SIM x1 + TF x1 or SIM x2
Connectivity	GSM, WCDMA, FDD-LTE, TDD-LTE, Wi-Fi, BT 5.0, USB3.0, e-SIM (optional), GPS, GLONASS
Audio	Built-in microphone and speaker
Charging	5V2A adapter, USB charging
Battery (Optional)	3.8V / 5000mAh
Accessories(Optional)	Hand Strap
Environmental	Operating temperature: -10°C - 50°C (14°F - 122°F) Storage temperature: -20°C - 70°C (-4°F - 158°F) Relative humidity (non-condense): 5% - 95%
Dimensions	78 x 166 x 16.6 mm (3.07 x 6.54 x 0.65 inches)
Weight	250g

All features and specifications are subject to change without notice.
Contact wizarPOS website for more details.
www.wizarpos.com

Thank you for choosing WizarPOS !

Intelligent + Security



To verify the functionality of the equipment, utilize the terminal's self-check capabilities. Click Settings > Self-check and choose the functionality or parts that you want to test.

1. WizarPOS provides after-sales service in accordance with applicable laws and regulations. Please review the warranty terms outlined below.
2. **Warranty Period:** The terminal and charger are covered by a one-year warranty. During this period, if the product experiences a failure not caused by user negligence, WizarPOS will offer free repair or replacement services. For assistance, it is recommended to first contact your local distributor, and provide a completed warranty card with accurate information.
3. The warranty does not cover the following situations: unauthorized maintenance of the terminal, modifications to the terminal's operating system, installation of third-party applications causing malfunction, damage due to improper use (such as dropping, crushing, impact, immersion, fire, etc.), missing or inaccurate warranty information, expired warranty period, or any other activities that violate legal regulations.
4. Follow installation instructions carefully and use only the specified power adapter. Replacing it with other adapters is prohibited. Ensure that the power socket meets the required voltage specifications. It is recommended to use a socket with a fuse and ensure proper grounding.
5. To clean the terminal, use a soft, lint-free cloth—avoid using chemicals and sharp objects.
6. Keep the terminal away from liquids to prevent short circuits or damage caused by splashes, and avoid inserting foreign objects into any ports. The terminal and battery should not be exposed to direct sunlight, high temperatures, smoke, dust, or humidity.
7. If the terminal malfunctions, contact certified POS maintenance professionals for repair. Unauthorized personnel should not attempt repairs.
8. Do not modify the terminal without authorization. Modifying a financial terminal is illegal. Users assume the risks associated with installing third-party applications, which may cause the system to operate at reduced speeds.

Magnetic Stripe Transactions: With the card's magnetic stripe facing downwards towards the screen, swipe the card through the magnetic stripe reader at a constant speed, in any direction.

 Storage temperature
-20°C~70°C (-4°F to 158°F)

9. In case of abnormal odors, overheating, or smoke, immediately disconnect the power supply.
10. Do not place the battery in fire, disassemble it, drop it, or apply excessive pressure. If the battery is damaged, immediately discontinue use and replace it with a new one. The battery charging time should not exceed 24 hours.
If the battery is not used for an extended period, charge it every six months.
For optimal performance, replace the battery after two years of continuous use.
11. The disposal of batteries, equipment, and accessories must comply with local regulations. These items cannot be discarded as household waste. Improper disposal of batteries may lead to hazardous situations such as explosions.

Trouble	Trouble shooting
Cannot connect the mobile network	◆ Check whether the function of "data" is open. ◆ Check whether the APN is correct. ◆ Check whether the data service of SIM is activated.
Display unstable	◆ The display may be interfered by instability voltage when charging, please reconnect the plug.
No response	◆ Restart the APP or operation system.
Operation very slow	◆ Please exit APPs which are not necessary.

This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The use of accessories that do not satisfy these requirements may not comply with FCC RF exposure requirements, and should be avoided.

Repair date	Repair content

For more information, please log on to the company's official website
<http://www.wizarpos.com>

wizarPOS