



FCC RF Test Report

APPLICANT : Meta Platforms Technologies, LLC
EQUIPMENT : AI Glasses
MODEL NAME : G4QM, G4QR, G4QB, G4QS
FCC ID : 2AG0Z-G4Q
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Feb. 27, 2026 ~ Mar. 04, 2026

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Fly Liang

Approved by: Fly Liang



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	8
1.6 Testing Location	8
1.7 Test Software.....	8
1.8 Applicable Standards.....	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Carrier Frequency and Channel	10
2.2 Test Mode	11
2.3 Connection Diagram of Test System.....	13
2.5 EUT Operation Test Setup	14
2.6 Measurement Results Explanation Example.....	14
3 TEST RESULT	15
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	15
3.2 Maximum Conducted Output Power Measurement	21
3.3 Power Spectral Density Measurement	23
3.4 Unwanted Emissions Measurement	28
3.5 AC Conducted Emission Measurement.....	33
3.6 Antenna Requirements	35
4 LIST OF MEASURING EQUIPMENT	36
5 MEASUREMENT UNCERTAINTY	37
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR572123-01D	Rev. 01	Initial issue of report	Mar. 19, 2026



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 3.69 dB at 5371.77 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 16.18 dB at 0.19 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	15.203 & 15.407(a)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Meta Platforms Technologies, LLC
1 Meta Way, Menlo Park, CA 94025, USA

1.2 Manufacturer

Meta Platforms Technologies, LLC
1 Meta Way, Menlo Park, CA 94025, USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	AI Glasses
Model Name	G4QM, G4QR, G4QB, G4QS
FCC ID	2AGOZ-G4Q
SN Code	Conducted: 4Q0Y1GCHBC0010 for Sample 1 Conduction: 4F1NB12J0300PM for Sample 1 Radiation: 4Q0YM76J0Q0043 for Sample 1 4Q0YB75J0T00DG for Sample 2 4Q0YV26J0T0094 for Sample 3 4Q0YV6HJ0T004T for Sample 4
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are four types of EUT: Sample 1(G4QM), Sample 2(G4QR), Sample 3(G4QB) and Sample 4(G4QS), the differences between them could be referred to G4QM, G4QR, G4QB, G4QS _Operational Description of Product Equality Declaration which is exhibit separately. According to the differences, Sample 1 was chosen to perform full test and Sample 2/3/4 was verified the worse cases of RSE.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna	<5180 MHz ~ 5240 MHz> 802.11a : 14.76 dBm / 0.0299 W 802.11n HT20 : 14.82 dBm / 0.0303 W 802.11n HT40 : 14.64 dBm / 0.0291 W 802.11ac VHT20: 14.88 dBm / 0.0308 W 802.11ac VHT40: 14.66 dBm / 0.0292 W 802.11ac VHT80: 14.51 dBm / 0.0282 W 802.11ax HE20: 14.89 dBm / 0.0308 W 802.11ax HE40: 14.68 dBm / 0.0294 W 802.11ax HE80: 14.54 dBm / 0.0284 W <5260 MHz ~ 5320 MHz> 802.11a : 15.39 dBm / 0.0346 W 802.11n HT20 : 15.37 dBm / 0.0344 W 802.11n HT40 : 15.20 dBm / 0.0331 W 802.11ac VHT20: 15.42 dBm / 0.0348 W 802.11ac VHT40: 15.25 dBm / 0.0335 W 802.11ac VHT80: 15.11 dBm / 0.0324 W 802.11ac VHT160: 14.57 dBm / 0.0286 W 802.11ax HE20: 15.63 dBm / 0.0366 W 802.11ax HE40: 15.41 dBm / 0.0348 W 802.11ax HE80: 14.68 dBm / 0.0294 W 802.11ax HE160: 14.70 dBm / 0.0295 W <5500 MHz ~ 5720 MHz > 802.11a : 15.18 dBm / 0.0330 W 802.11n HT20 : 15.10 dBm / 0.0324 W 802.11n HT40 : 15.05 dBm / 0.0320 W 802.11ac VHT20: 15.12 dBm / 0.0325 W 802.11ac VHT40: 15.10 dBm / 0.0324 W 802.11ac VHT80: 15.03 dBm / 0.0318 W 802.11ac VHT160: 15.03 dBm / 0.0318 W 802.11ax HE20: 15.38 dBm / 0.0345 W 802.11ax HE40: 15.10 dBm / 0.0324 W 802.11ax HE80: 15.06 dBm / 0.0321 W 802.11ax HE160: 15.03 dBm / 0.0318 W <5745 MHz ~ 5825 MHz> 802.11a : 16.14 dBm / 0.0411 W 802.11n HT20 : 16.10 dBm / 0.0407 W 802.11n HT40 : 16.02 dBm / 0.0400 W 802.11ac VHT20: 16.13 dBm / 0.0410 W 802.11ac VHT40: 16.04 dBm / 0.0402 W 802.11ac VHT80: 16.03 dBm / 0.0401 W 802.11ax HE20: 16.15 dBm / 0.0412 W 802.11ax HE40: 16.06 dBm / 0.0404 W 802.11ax HE80: 16.05 dBm / 0.0403 W

99% Occupied Bandwidth	<5180 MHz ~ 5240 MHz> 802.11a : 16.92 MHz 802.11ac VHT20 : 18.06 MHz 802.11ac VHT40 : 36.86 MHz 802.11ac VHT80 : 76.67 MHz 802.11ax HE20: 19.13 MHz 802.11ax HE40: 38.03 MHz 802.11ax HE80: 77.88 MHz <5260 MHz ~ 5320 MHz> 802.11a : 16.94 MHz 802.11ac VHT20 : 18.19 MHz 802.11ac VHT40 : 36.86 MHz 802.11ac VHT80 : 76.71 MHz 802.11ac VHT160 : 156.63 MHz 802.11ax HE20: 19.12 MHz 802.11ax HE40: 38.04 MHz 802.11ax HE80: 77.90 MHz 802.11ax HE160: 157.71 MHz <5500 MHz ~ 5720 MHz> 802.11a : 17.11 MHz 802.11ac VHT20 : 18.13 MHz 802.11ac VHT40 : 36.96 MHz 802.11ac VHT80 : 76.77 MHz 802.11ac VHT160 : 156.87 MHz 802.11ax HE20: 19.12 MHz 802.11ax HE40: 38.06 MHz 802.11ax HE80: 77.96 MHz 802.11ax HE160: 157.95 MHz <5745 MHz ~ 5825 MHz> 802.11a : 17.11 MHz 802.11ac VHT20 : 18.23 MHz 802.11ac VHT40 : 36.88 MHz 802.11ac VHT80 : 76.62 MHz 802.11ax HE20: 19.14 MHz 802.11ax HE40: 38.03 MHz 802.11ax HE80: 77.91 MHz
Antenna Type / Gain	<5180 MHz ~ 5240 MHz> IFA Antenna type with gain 3.77 dBi <5260 MHz ~ 5320 MHz> IFA Antenna type with gain 3.91 dBi <5500 MHz ~ 5720 MHz> IFA Antenna type with gain 3.99 dBi <5745 MHz ~ 5825 MHz> IFA Antenna type with gain 3.65 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

Note:

1. For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing has assessed only 802.11ac VHT20/ VHT40 by referring to their higher conducted power.



2. 802.11ax support OFDMA full RU tone and partial RU tone.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ CO02-SZ 03CH03-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH03-SZ	AUDIX	E3	6.2009-8-24
2.	CO02-SZ	AUDIX	E3	6.120613b



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2020+Cor.1-2023

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X/Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210	50 ^{##}	5250

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640
	-	-	114 ^{##}	5570
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710	-	-

Note:

1. The above Frequency and Channel in "*" are 40MHz bandwidth.
2. The above Frequency and Channel in "[#]" are 80MHz bandwidth.
3. The above Frequency and Channel in "^{##}" are 160MHz bandwidth.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

SISO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0
802.11ac VHT160	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0
802.11ax HE160	MCS0

AC Conducted Emission	Mode 1 : BT Link + WLAN(5G) Link + Charging Case + USB Cable (Type C)(Charging From Adapter)
Remark: For Radiated Test Cases, The tests were performance with DC Power Supply.	



RSE Co-location	
Bluetooth-LE_GFSK CH39 2Mbps 2480MHZ + 802.11ax HE80 CH58 5290MHZ	

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		20M BW	20M BW	20M BW	20M BW
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		40M BW	40M BW	40M BW	40M BW
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159
Straddle		-	-	142	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		80M BW	80M BW	80M BW	80M BW
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	122	-
Straddle		-	-	138	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		160M BW		160M BW	160M BW
M	Middle	50		114	-

2.3 Connection Diagram of Test System

AC Conducted Emission:

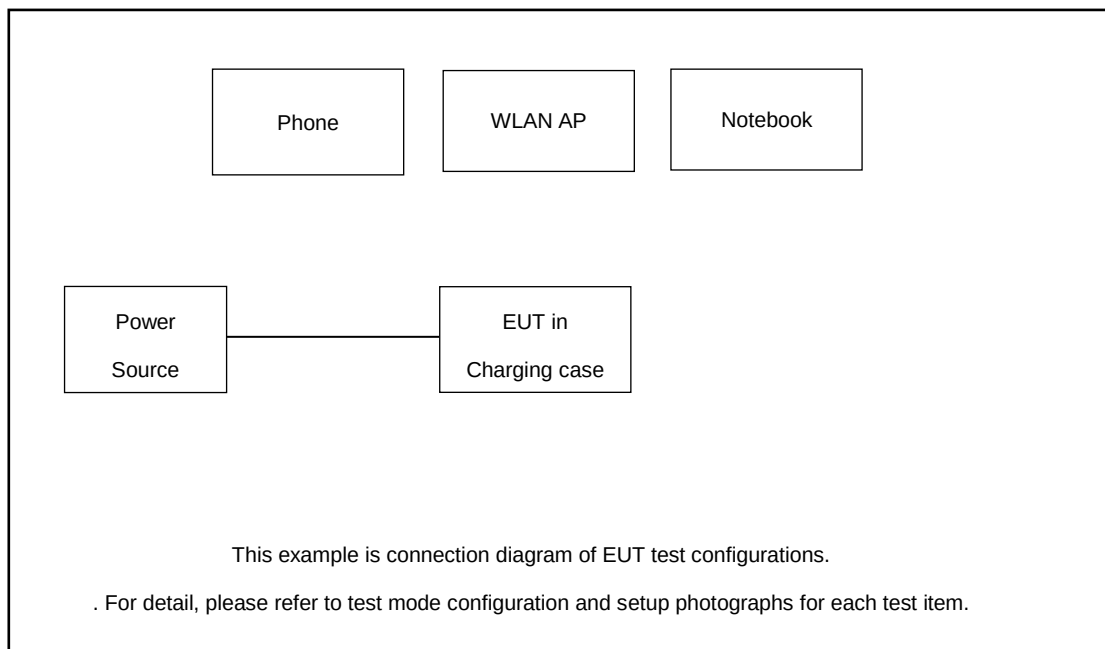

Radiated Emission:

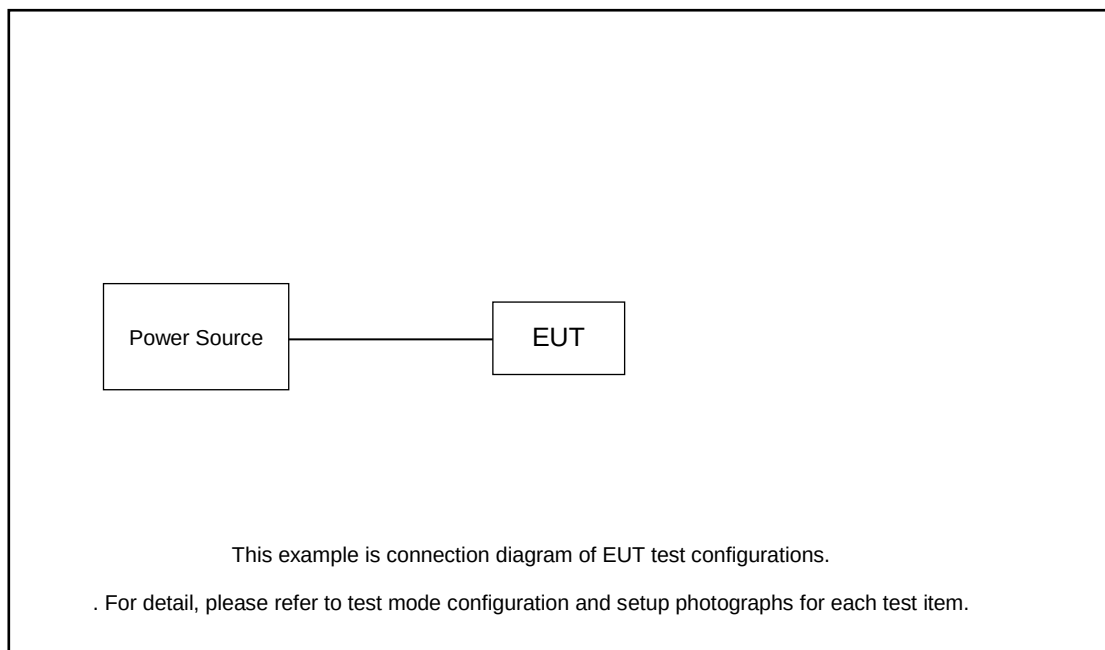

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	Latitude 3400	N/A	N/A	N/A
2.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
3.	Phone	Oneplus	N/A	N/A	N/A	N/A
4.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
5.	USB Cable	NA	NA	NA	N/A	N/A
6.	Adapter	NA	NA	NA	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 1.50 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 1.50 + 10 = 11.50 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 & ANSI C63.10-2020 clause 12.5.1 for 6dB BW and 12.5.2 for 26dB BW and 6.9.3 for 99% occupied bandwidth measurements.


☒	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	- Set RBW = shall be in the range of 1% to 5% of the emission bandwidth. - Set the VBW > RBW. - Detector = Peak. - Trace mode = max hold - Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%. - For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) $\geq 3 \times$ RBW. - Measure and record the results in the test report.
☒	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	- Set RBW = 100 kHz. - Set the VBW $\geq 3 \times$ RBW. - Detector = Peak. - Trace mode = max hold - Measure the maximum width of the emission that is 6 dB down from the peak of the emission. - Measure and record the results in the test report.



3.1.4 Test Setup


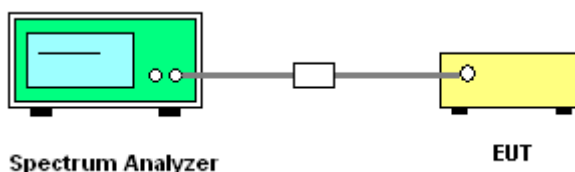




3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth



Please refer to Appendix A.

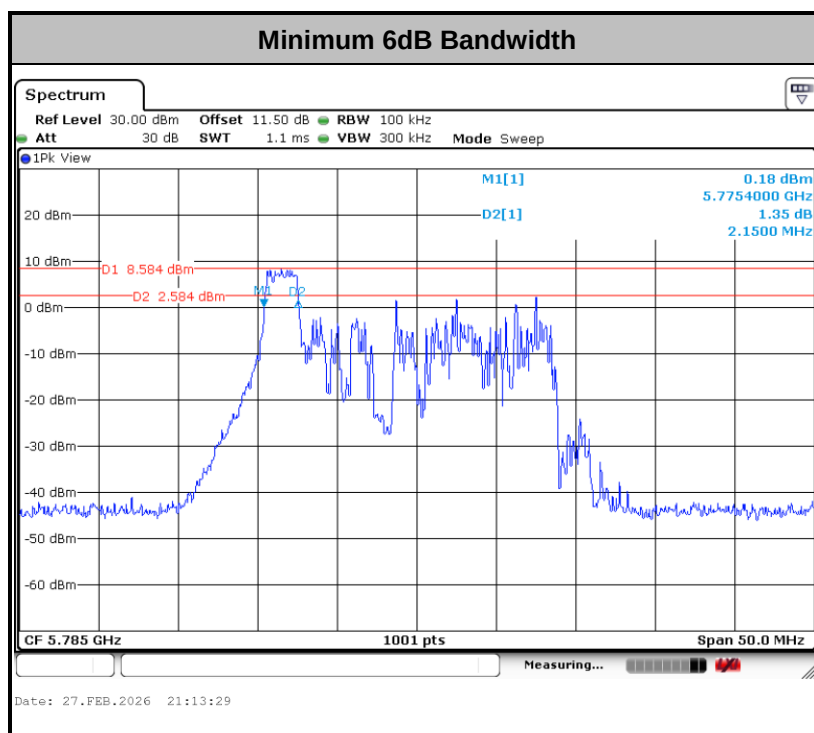

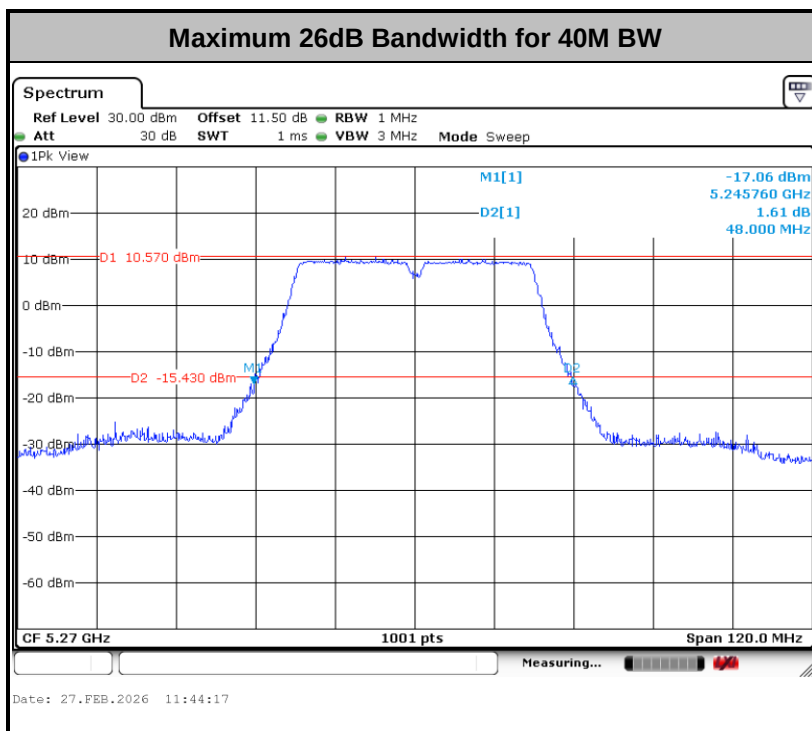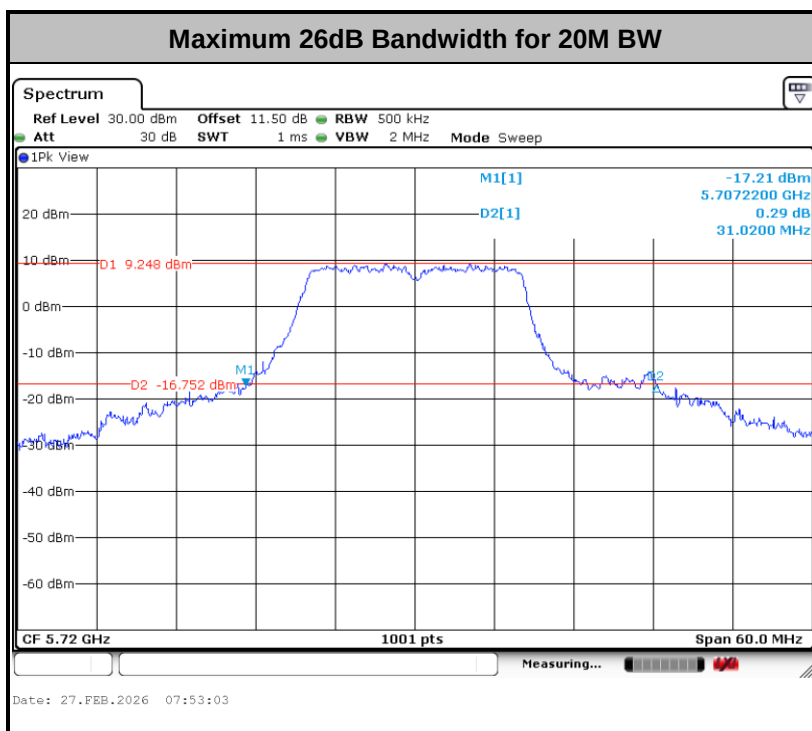

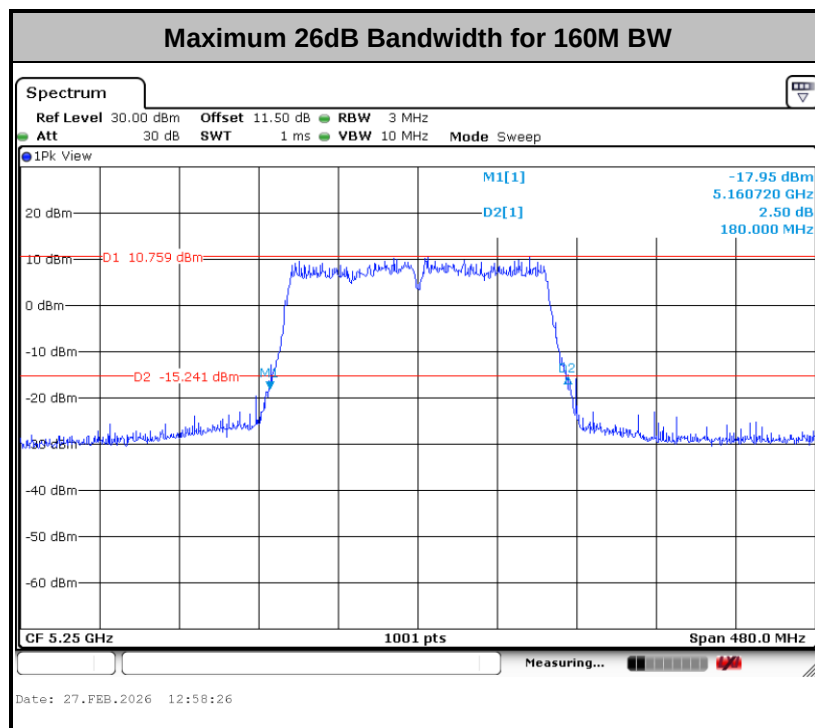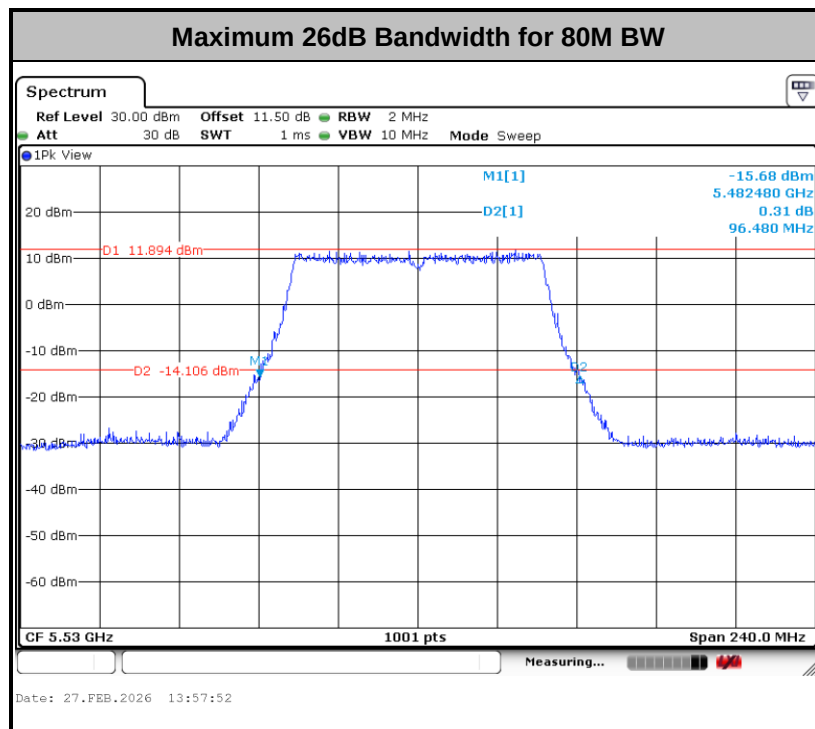

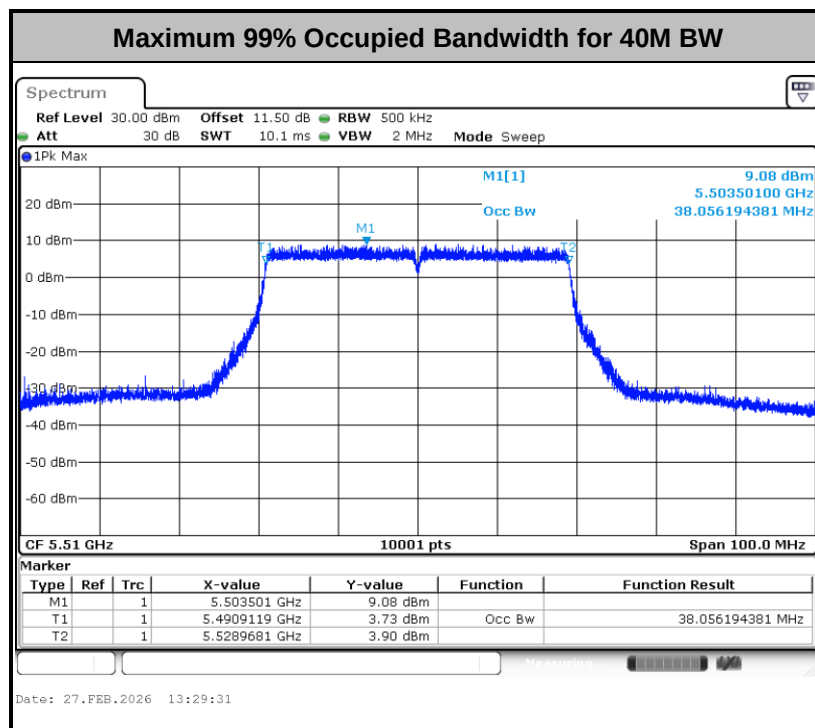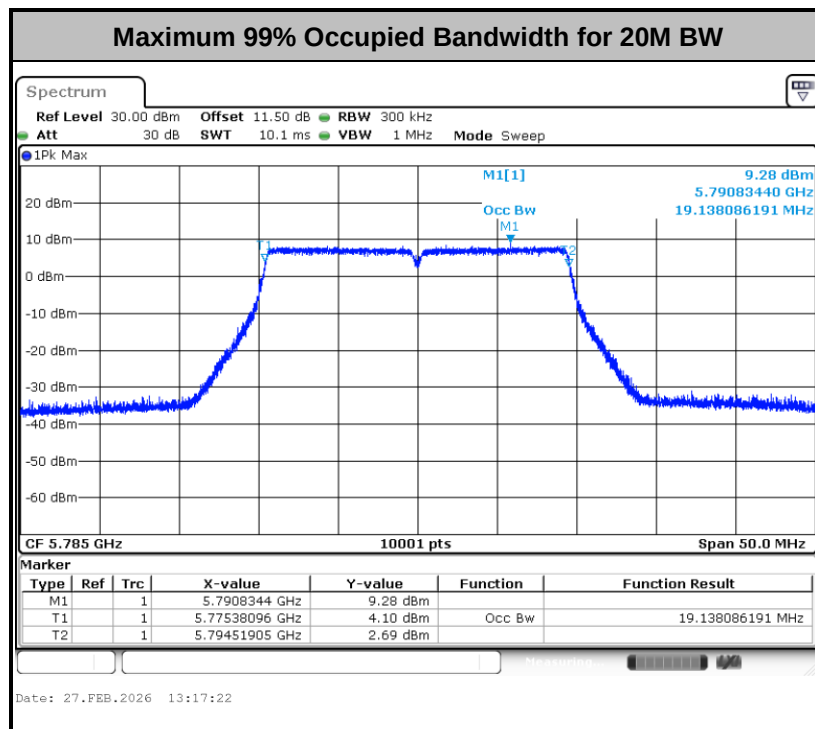

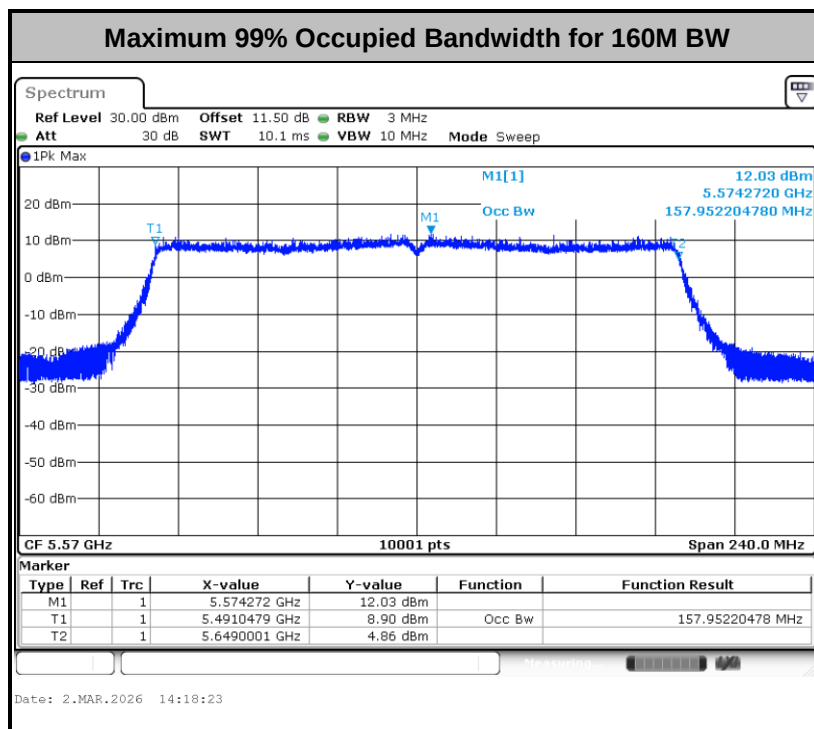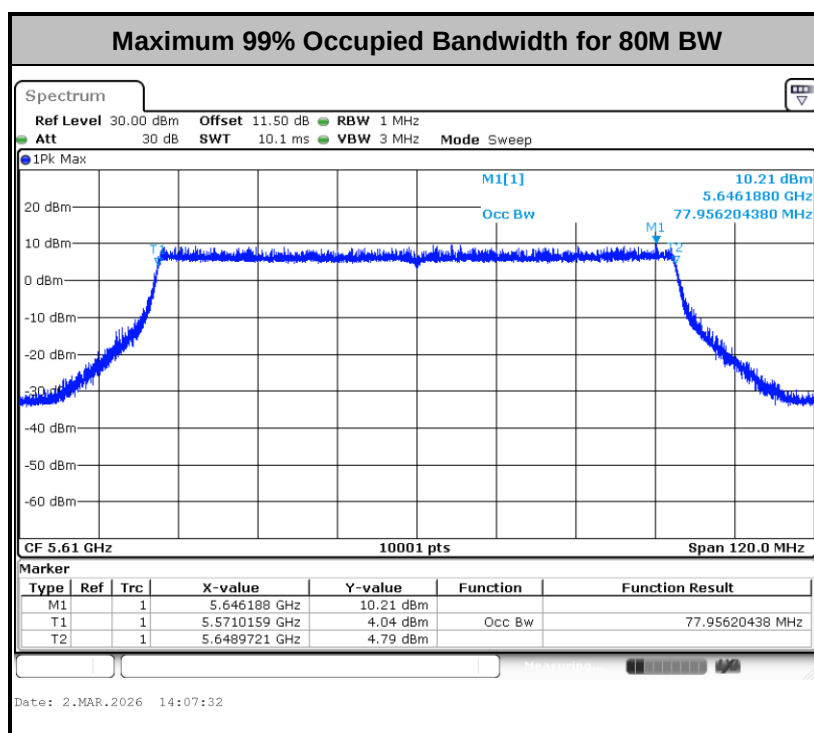

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log_{10} B$, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

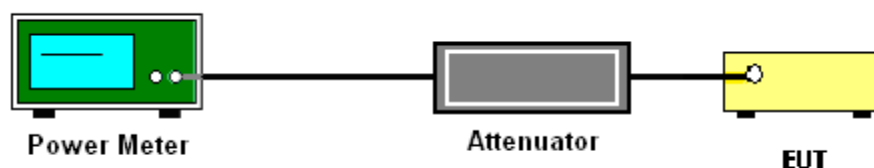

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.

For devices operating in the bands UNII-1/2A/2C

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

For devices operating in the band UNII-3

Method SA-2


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
- Set VBW $\geq$ 1 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.



1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.


3.3.4 Test Setup

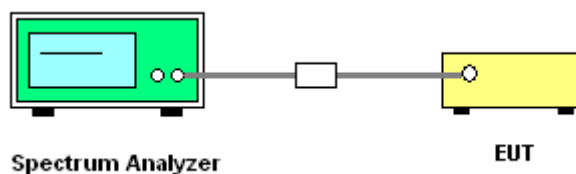

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.


For devices operating in the bands UNII-1/2A/2C

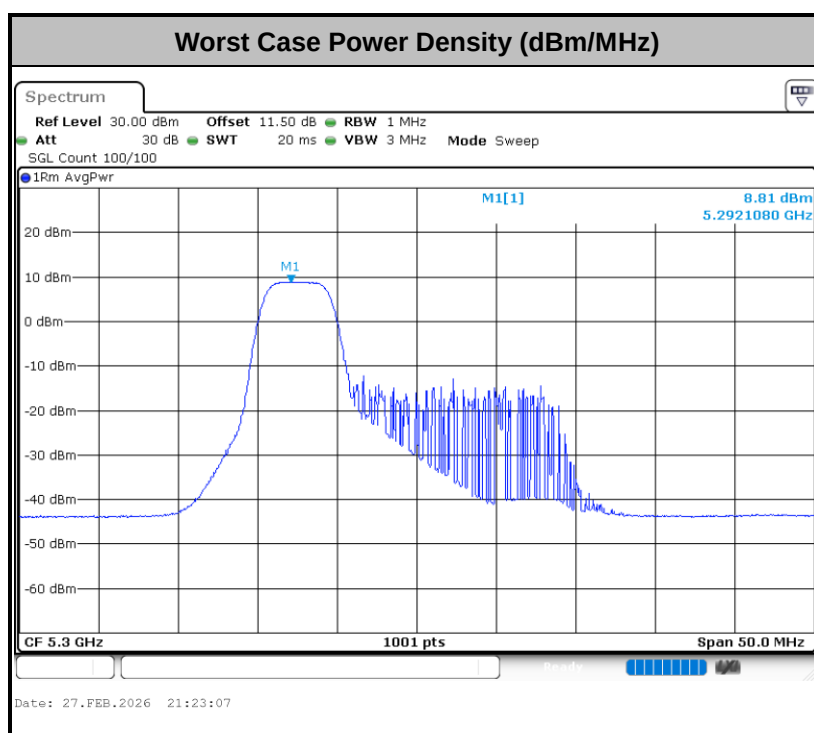

Note: Average Power Density (dB) = Measured value+ Duty Factor



For devices operating in the band UNII-3

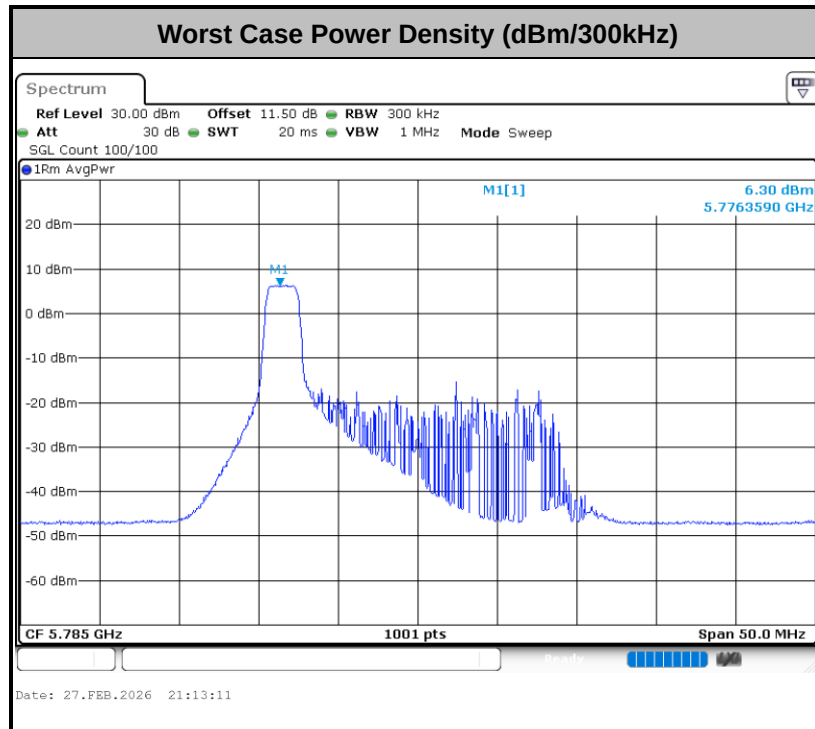

Note: Average Power Density (dB) = Measured value+ Duty Factor +10 log(500kHz/RBW)

3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) For transmitters operating in the 5.725-5.85 GHz band:
- 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log (d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
(1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

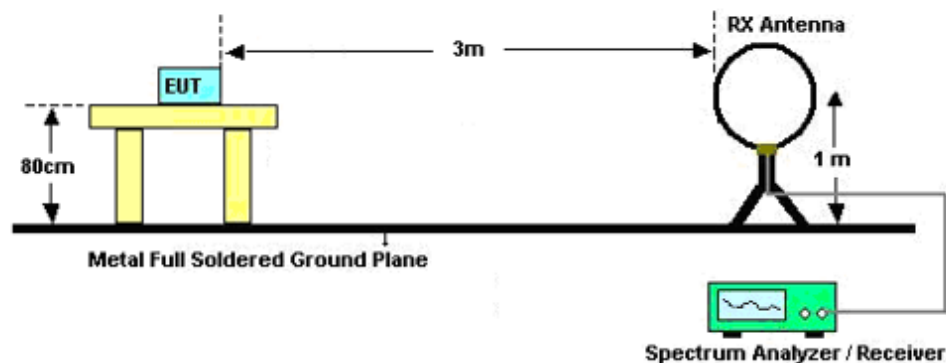

For radiated emissions from 30MHz to 1GHz

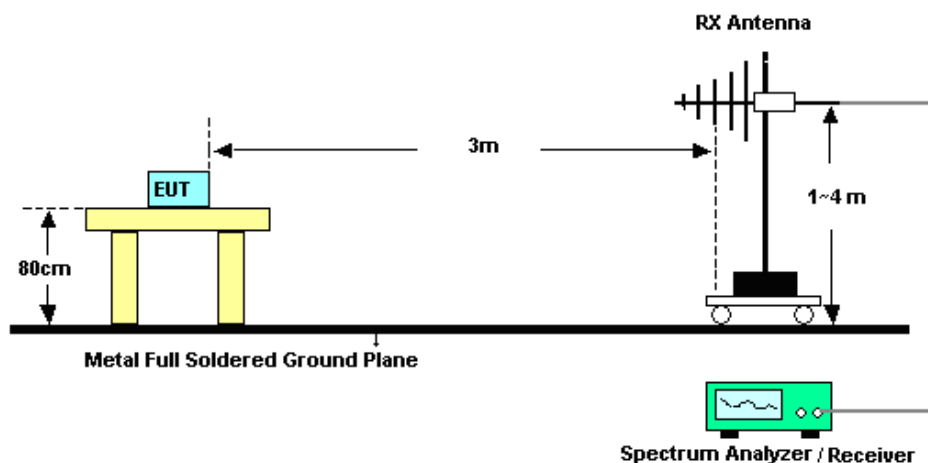

For radiated emissions above 1GHz

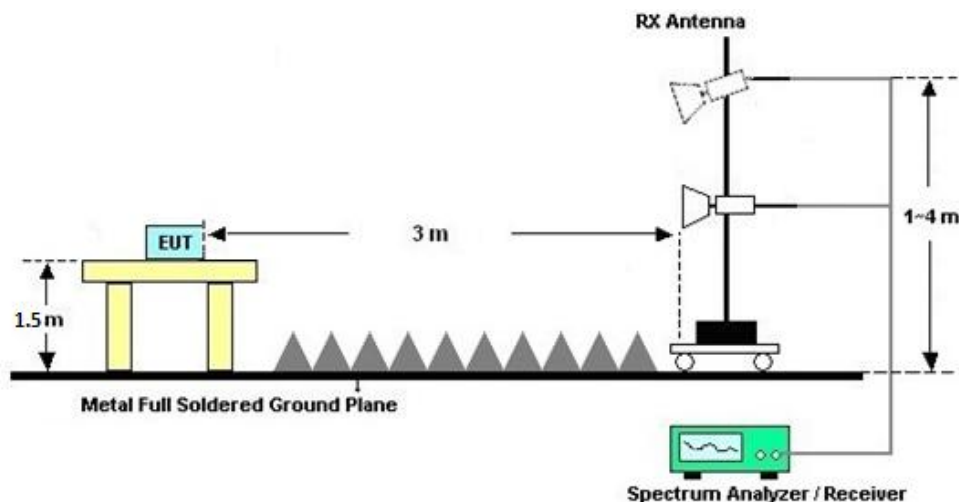



3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

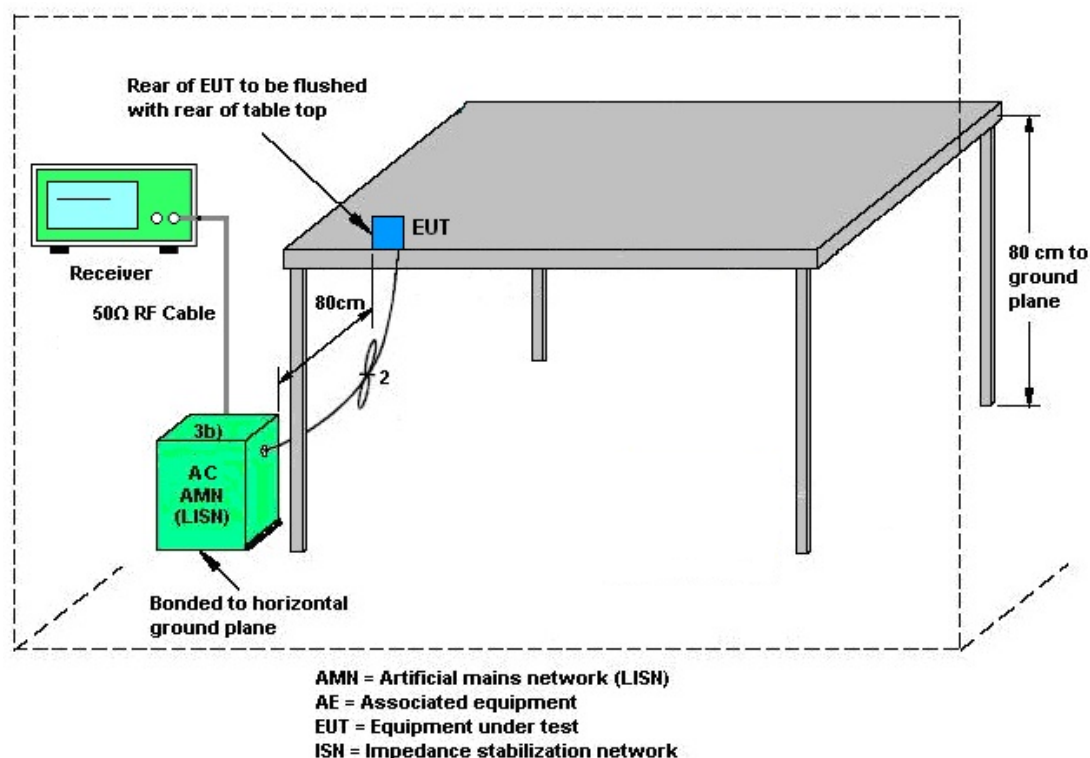

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 02, 2025	Feb. 28, 2026~Mar. 01, 2026	Apr. 01, 2026	Radiation (03CH03-SZ)
EXA Signal Analyzer	KEYSIGHT	N9010B	MY59071191	10KHz~44GHz	Apr. 02, 2025	Feb. 28, 2026~Mar. 01, 2026	Apr. 01, 2026	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 25, 2025	Feb. 28, 2026~Mar. 01, 2026	Dec. 24, 2026	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Sep. 13, 2025	Feb. 28, 2026~Mar. 01, 2026	Sep. 12, 2026	Radiation (03CH03-SZ)
Double Ridge Guide Antenna	ETS-Lindgren	Burgeon-3117	00240107	1GHz~18GHz	Jul. 13, 2025	Feb. 28, 2026~Mar. 01, 2026	Jul.12, 2026	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2025	Feb. 28, 2026~Mar. 01, 2026	Jul.02, 2026	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 03, 2025	Feb. 28, 2026~Mar. 01, 2026	Apr. 02, 2027	Radiation (03CH03-SZ)
Amplifier	EM Electronics	EM330	060756	0.01Hz~3000MHz	Apr. 02, 2025	Feb. 28, 2026~Mar. 01, 2026	Apr. 01, 2026	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 13, 2025	Feb. 28, 2026~Mar. 01, 2026	Oct. 12, 2026	Radiation (03CH03-SZ)
HF Amplifier	Keysight	83017A	MY53270357	500MHz~26.5G Hz	Apr. 02, 2025	Feb. 28, 2026~Mar. 01, 2026	Apr. 01, 2026	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	N/A	Oct. 13, 2025	Feb. 28, 2026~Mar. 01, 2026	Oct. 12, 2026	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Feb. 28, 2026~Mar. 01, 2026	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Feb. 28, 2026~Mar. 01, 2026	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 02, 2025	Mar. 04, 2026	Jul. 01, 2026	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2025	Mar. 04, 2026	Jul. 02, 2026	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec.24, 2025	Mar. 04, 2026	Dec. 23, 2026	Conduction (CO02-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 02, 2025	Feb. 27, 2026~Mar. 02, 2026	Apr. 01, 2026	Conducted (TH01-SZ)
Pulse Power Senor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 24, 2025	Feb. 27, 2026~Mar. 02, 2026	Dec. 23, 2026	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Oct. 13, 2025	Feb. 27, 2026~Mar. 02, 2026	Oct. 12, 2026	Conducted (TH01-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Sam Zheng	Temperature:	21~25	°C
Test Date:	2022/2/27~2026/3/02	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Power Table

UNII-1												
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail	Power Setting
						Ant 1	Ant 1	Ant 1	Ant 1			
11a	6Mbps	1	36	Full	5180	0.03	14.76	23.98	3.77		Pass	14.5
11a	6Mbps	1	44	Full	5220	0.03	14.67	23.98	3.77		Pass	14.5
11a	6Mbps	1	48	Full	5240	0.03	14.71	23.98	3.77		Pass	14.5
HT20	MCS0	1	36	Full	5180	0.00	14.82	23.98	3.77		Pass	14.5
HT20	MCS0	1	44	Full	5220	0.00	14.74	23.98	3.77		Pass	14.5
HT20	MCS0	1	48	Full	5240	0.00	14.70	23.98	3.77		Pass	14.5
HT40	MCS0	1	38	Full	5190	0.00	14.64	23.98	3.77		Pass	14.5
HT40	MCS0	1	46	Full	5230	0.00	14.60	23.98	3.77		Pass	14.5
VHT20	MCS0	1	36	Full	5180	0.00	14.88	23.98	3.77		Pass	14.5
VHT20	MCS0	1	44	Full	5220	0.00	14.76	23.98	3.77		Pass	14.5
VHT20	MCS0	1	48	Full	5240	0.00	14.72	23.98	3.77		Pass	14.5
VHT40	MCS0	1	38	Full	5190	0.00	14.66	23.98	3.77		Pass	14.5
VHT40	MCS0	1	46	Full	5230	0.00	14.61	23.98	3.77		Pass	14.5
VHT80	MCS0	1	42	Full	5210	0.00	14.51	23.98	3.77		Pass	14.5
HE20	MCS0	1	36	Full	5180	0.00	14.89	23.98	3.77		Pass	14.5
HE20	MCS0	1	36	26/0	5180	0.00	6.45	23.98	3.77		Pass	6
HE20	MCS0	1	36	52/37	5180	0.00	9.90	23.98	3.77		Pass	9
HE20	MCS0	1	36	106/53	5180	0.00	12.75	23.98	3.77		Pass	12
HE20	MCS0	1	44	Full	5220	0.00	14.83	23.98	3.77		Pass	14.5
HE20	MCS0	1	44	26/0	5220	0.00	6.35	23.98	3.77		Pass	6
HE20	MCS0	1	44	52/37	5220	0.00	9.78	23.98	3.77		Pass	9
HE20	MCS0	1	44	106/53	5220	0.00	12.68	23.98	3.77		Pass	12
HE20	MCS0	1	48	Full	5240	0.00	14.82	23.98	3.77		Pass	14.5
HE20	MCS0	1	48	26/8	5240	0.00	6.42	23.98	3.77		Pass	6
HE20	MCS0	1	48	52/40	5240	0.00	9.80	23.98	3.77		Pass	9
HE20	MCS0	1	48	106/54	5240	0.00	12.65	23.98	3.77		Pass	12
HE40	MCS0	1	38	Full	5190	0.00	14.68	23.98	3.77		Pass	14.5
HE40	MCS0	1	38	242/61	5190	0.00	14.66	23.98	3.77		Pass	14.5
HE40	MCS0	1	46	Full	5230	0.00	14.62	23.98	3.77		Pass	14.5
HE40	MCS0	1	46	242/62	5230	0.00	14.61	23.98	3.77		Pass	14.5
HE80	MCS0	1	42	Full	5210	0.00	14.54	23.98	3.77		Pass	14.5
HE80	MCS0	1	42	484/65	5210	0.00	13.51	23.98	3.77		Pass	13.5

TEST RESULTS DATA
Average Power Table

UNII-2A												
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	Power Setting
						Ant 1	Ant 1	Ant 1	Ant 1			
11a	6Mbps	1	52	Full	5260	0.03	15.27	23.98	3.91	26.99	Pass	15
11a	6Mbps	1	60	Full	5300	0.03	15.39	23.98	3.91	26.99	Pass	15
11a	6Mbps	1	64	Full	5320	0.03	15.08	23.98	3.91	26.99	Pass	15
HT20	MCS0	1	52	Full	5260	0.00	15.37	23.98	3.91	26.99	Pass	15
HT20	MCS0	1	60	Full	5300	0.00	15.33	23.98	3.91	26.99	Pass	15
HT20	MCS0	1	64	Full	5320	0.00	15.02	23.98	3.91	26.99	Pass	15
HT40	MCS0	1	54	Full	5270	0.00	15.20	23.98	3.91	26.99	Pass	15
HT40	MCS0	1	62	Full	5310	0.00	15.02	23.98	3.91	26.99	Pass	15
VHT20	MCS0	1	52	Full	5260	0.00	15.42	23.98	3.91	26.99	Pass	15
VHT20	MCS0	1	60	Full	5300	0.00	15.40	23.98	3.91	26.99	Pass	15
VHT20	MCS0	1	64	Full	5320	0.00	15.04	23.98	3.91	26.99	Pass	15
VHT40	MCS0	1	54	Full	5270	0.00	15.25	23.98	3.91	26.99	Pass	15
VHT40	MCS0	1	62	Full	5310	0.00	15.03	23.98	3.91	26.99	Pass	15
VHT80	MCS0	1	58	Full	5290	0.00	15.11	23.98	3.91	26.99	Pass	15
VHT160	MCS0	1	50	Full	5250	0.00	14.57	23.98	3.91	26.99	Pass	14.5
HE20	MCS0	1	52	Full	5260	0.00	15.63	23.98	3.91	26.99	Pass	15
HE20	MCS0	1	52	26/0	5260	0.00	11.05	23.98	3.91	26.99	Pass	10.5
HE20	MCS0	1	52	52/37	5260	0.00	14.15	23.98	3.91	26.99	Pass	13.5
HE20	MCS0	1	52	106/53	5260	0.00	15.62	23.98	3.91	26.99	Pass	15
HE20	MCS0	1	60	Full	5300	0.00	15.55	23.98	3.91	26.99	Pass	15
HE20	MCS0	1	60	26/0	5300	0.00	10.85	23.98	3.91	26.99	Pass	10.5
HE20	MCS0	1	60	52/37	5300	0.00	14.11	23.98	3.91	26.99	Pass	13.5
HE20	MCS0	1	60	106/53	5300	0.00	15.53	23.98	3.91	26.99	Pass	15
HE20	MCS0	1	64	Full	5320	0.00	15.09	23.98	3.91	26.99	Pass	15
HE20	MCS0	1	64	26/8	5320	0.00	10.56	23.98	3.91	26.99	Pass	10.5
HE20	MCS0	1	64	52/40	5320	0.00	13.59	23.98	3.91	26.99	Pass	13.5
HE20	MCS0	1	64	106/54	5320	0.00	15.06	23.98	3.91	26.99	Pass	15
HE40	MCS0	1	54	Full	5270	0.00	15.41	23.98	3.91	26.99	Pass	15
HE40	MCS0	1	54	242/61	5270	0.00	15.40	23.98	3.91	26.99	Pass	15
HE40	MCS0	1	62	Full	5310	0.00	15.05	23.98	3.91	26.99	Pass	15
HE40	MCS0	1	62	242/62	5310	0.00	15.03	23.98	3.91	26.99	Pass	15
HE80	MCS0	1	58	Full	5290	0.00	14.68	23.98	3.91	26.99	Pass	14
HE80	MCS0	1	58	484/66	5290	0.00	14.66	23.98	3.91	26.99	Pass	14.5
HE160	MCS0	1	50	Full	5250	0.00	14.70	23.98	3.91	26.99	Pass	14.5
HE160	MCS0	1	50	996/67	5250	0.00	13.86	23.98	3.91	26.99	Pass	13.5
HE160	MCS0	1	50	996/S67	5250	0.00	12.52	23.98	3.91	26.99	Pass	12.5

TEST RESULTS DATA
Average Power Table

UNII-2C												
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	Power Setting
						Ant 1	Ant 1	Ant 1	Ant 1			
11a	6Mbps	1	100	Full	5500	0.03	15.18	23.98	3.99	26.99	Pass	15
11a	6Mbps	1	116	Full	5580	0.03	15.05	23.98	3.99	26.99	Pass	15
11a	6Mbps	1	140	Full	5700	0.03	15.13	23.98	3.99	26.99	Pass	15
11a	6Mbps	1	144	Full	5720	0.03	15.09	23.98	3.99	26.99	Pass	15
HT20	MCS0	1	100	Full	5500	0.00	15.02	23.98	3.99	26.99	Pass	15
HT20	MCS0	1	116	Full	5580	0.00	15.01	23.98	3.99	26.99	Pass	15
HT20	MCS0	1	140	Full	5700	0.00	15.10	23.98	3.99	26.99	Pass	15
HT20	MCS0	1	144	Full	5720	0.00	15.04	23.98	3.99	26.99	Pass	15
HT40	MCS0	1	102	Full	5510	0.00	15.05	23.98	3.99	26.99	Pass	15
HT40	MCS0	1	110	Full	5550	0.00	15.03	23.98	3.99	26.99	Pass	15
HT40	MCS0	1	134	Full	5670	0.00	15.02	23.98	3.99	26.99	Pass	15
HT40	MCS0	1	142	Full	5710	0.00	15.02	23.98	3.99	26.99	Pass	15
VHT20	MCS0	1	100	Full	5500	0.00	15.05	23.98	3.99	26.99	Pass	15
VHT20	MCS0	1	116	Full	5580	0.00	15.04	23.98	3.99	26.99	Pass	15
VHT20	MCS0	1	140	Full	5700	0.00	15.12	23.98	3.99	26.99	Pass	15
VHT20	MCS0	1	144	Full	5720	0.00	15.05	23.98	3.99	26.99	Pass	15
VHT40	MCS0	1	102	Full	5510	0.00	15.10	23.98	3.99	26.99	Pass	15
VHT40	MCS0	1	110	Full	5550	0.00	15.04	23.98	3.99	26.99	Pass	15
VHT40	MCS0	1	134	Full	5670	0.00	15.04	23.98	3.99	26.99	Pass	15
VHT40	MCS0	1	142	Full	5710	0.00	15.03	23.98	3.99	26.99	Pass	15
VHT80	MCS0	1	106	Full	5530	0.00	15.03	23.98	3.99	26.99	Pass	15
VHT80	MCS0	1	122	Full	5610	0.00	15.02	23.98	3.99	26.99	Pass	15
VHT80	MCS0	1	138	Full	5690	0.00	15.03	23.98	3.99	26.99	Pass	15
VHT160	MCS0	1	114	Full	5570	0.00	15.03	23.98	3.99	26.99	Pass	15
HE20	MCS0	1	100	Full	5500	0.00	15.38	23.98	3.99	26.99	Pass	15
HE20	MCS0	1	100	26/0	5500	0.00	10.93	23.98	3.99	26.99	Pass	10.5
HE20	MCS0	1	100	52/37	5500	0.00	14.02	23.98	3.99	26.99	Pass	13.5
HE20	MCS0	1	100	106/53	5500	0.00	15.36	23.98	3.99	26.99	Pass	15
HE20	MCS0	1	116	Full	5580	0.00	15.09	23.98	3.99	26.99	Pass	15
HE20	MCS0	1	116	26/0	5580	0.00	10.53	23.98	3.99	26.99	Pass	10.5
HE20	MCS0	1	116	52/37	5580	0.00	13.55	23.98	3.99	26.99	Pass	13.5
HE20	MCS0	1	116	106/53	5580	0.00	15.02	23.98	3.99	26.99	Pass	15
HE20	MCS0	1	140	Full	5700	0.00	15.14	23.98	3.99	26.99	Pass	15
HE20	MCS0	1	140	26/8	5700	0.00	10.74	23.98	3.99	26.99	Pass	10.5
HE20	MCS0	1	140	52/40	5700	0.00	13.68	23.98	3.99	26.99	Pass	13.5
HE20	MCS0	1	140	106/54	5700	0.00	15.03	23.98	3.99	26.99	Pass	15
HE20	MCS0	1	144	Full	5720	0.00	15.36	23.98	3.99	26.99	Pass	15
HE20	MCS0	1	144	26/8	5720	0.00	10.85	23.98	3.99	26.99	Pass	10.5
HE20	MCS0	1	144	52/40	5720	0.00	13.90	23.98	3.99	26.99	Pass	13.5
HE20	MCS0	1	144	106/54	5720	0.00	15.35	23.98	3.99	26.99	Pass	15
HE40	MCS0	1	102	Full	5510	0.00	15.10	23.98	3.99	26.99	Pass	15
HE40	MCS0	1	102	242/61	5510	0.00	15.06	23.98	3.99	26.99	Pass	15
HE40	MCS0	1	110	Full	5550	0.00	15.08	23.98	3.99	26.99	Pass	15
HE40	MCS0	1	110	242/61	5550	0.00	15.06	23.98	3.99	26.99	Pass	15
HE40	MCS0	1	134	Full	5670	0.00	15.07	23.98	3.99	26.99	Pass	15
HE40	MCS0	1	134	242/62	5670	0.00	15.04	23.98	3.99	26.99	Pass	15
HE40	MCS0	1	142	Full	5710	0.00	15.04	23.98	3.99	26.99	Pass	15
HE40	MCS0	1	142	242/62	5710	0.00	15.01	23.98	3.99	26.99	Pass	15
HE80	MCS0	1	106	Full	5530	0.00	15.02	23.98	3.99	26.99	Pass	15
HE80	MCS0	1	106	484/65	5530	0.00	12.53	23.98	3.99	26.99	Pass	12.5
HE80	MCS0	1	122	Full	5610	0.00	15.06	23.98	3.99	26.99	Pass	15
HE80	MCS0	1	122	484/66	5610	0.00	15.03	23.98	3.99	26.99	Pass	15
HE80	MCS0	1	138	Full	5690	0.00	15.03	23.98	3.99	26.99	Pass	15
HE80	MCS0	1	138	484/66	5690	0.00	15.01	23.98	3.99	26.99	Pass	15
HE160	MCS0	1	114	Full	5570	0.00	15.03	23.98	3.99	26.99	Pass	15
HE160	MCS0	1	114	996/67	5570	0.00	13.01	23.98	3.99	26.99	Pass	13
HE160	MCS0	1	114	996/S67	5570	0.00	14.02	23.98	3.99	26.99	Pass	14

TEST RESULTS DATA
Average Power Table

UNII-3												
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail	Power Setting
						Ant 1	Ant 1	Ant 1	Ant 1			
11a	6Mbps	1	149	Full	5745	0.03	16.06	30.00	3.65		Pass	16
11a	6Mbps	1	157	Full	5785	0.03	16.04	30.00	3.65		Pass	16
11a	6Mbps	1	165	Full	5825	0.03	16.14	30.00	3.65		Pass	16
HT20	MCS0	1	149	Full	5745	0.00	16.02	30.00	3.65		Pass	16
HT20	MCS0	1	157	Full	5785	0.00	16.00	30.00	3.65		Pass	16
HT20	MCS0	1	165	Full	5825	0.00	16.10	30.00	3.65		Pass	16
HT40	MCS0	1	151	Full	5755	0.00	16.02	30.00	3.65		Pass	16
HT40	MCS0	1	159	Full	5795	0.00	16.00	30.00	3.65		Pass	16
VHT20	MCS0	1	149	Full	5745	0.00	16.03	30.00	3.65		Pass	16
VHT20	MCS0	1	157	Full	5785	0.00	16.04	30.00	3.65		Pass	16
VHT20	MCS0	1	165	Full	5825	0.00	16.13	30.00	3.65		Pass	16
VHT40	MCS0	1	151	Full	5755	0.00	16.04	30.00	3.65		Pass	16
VHT40	MCS0	1	159	Full	5795	0.00	16.02	30.00	3.65		Pass	16
VHT80	MCS0	1	155	Full	5775	0.00	16.03	30.00	3.65		Pass	16
HE20	MCS0	1	149	Full	5745	0.00	16.04	30.00	3.65		Pass	16
HE20	MCS0	1	149	26/0	5745	0.00	15.01	30.00	3.65		Pass	15
HE20	MCS0	1	149	52/37	5745	0.00	15.02	30.00	3.65		Pass	15
HE20	MCS0	1	149	106/53	5745	0.00	15.17	30.00	3.65		Pass	15
HE20	MCS0	1	157	Full	5785	0.00	16.08	30.00	3.65		Pass	16
HE20	MCS0	1	157	26/0	5785	0.00	15.03	30.00	3.65		Pass	15
HE20	MCS0	1	157	52/37	5785	0.00	15.03	30.00	3.65		Pass	15
HE20	MCS0	1	157	106/53	5785	0.00	15.33	30.00	3.65		Pass	15
HE20	MCS0	1	165	Full	5825	0.00	16.15	30.00	3.65		Pass	16
HE20	MCS0	1	165	26/8	5825	0.00	15.02	30.00	3.65		Pass	15
HE20	MCS0	1	165	52/40	5825	0.00	15.01	30.00	3.65		Pass	15
HE20	MCS0	1	165	106/54	5825	0.00	15.16	30.00	3.65		Pass	15
HE40	MCS0	1	151	Full	5755	0.00	16.06	30.00	3.65		Pass	16
HE40	MCS0	1	151	242/61	5755	0.00	15.02	30.00	3.65		Pass	15
HE40	MCS0	1	159	Full	5795	0.00	16.03	30.00	3.65		Pass	16
HE40	MCS0	1	159	242/62	5795	0.00	15.05	30.00	3.65		Pass	15
HE80	MCS0	1	155	Full	5775	0.00	16.05	30.00	3.65		Pass	16
HE80	MCS0	1	155	484/65	5775	0.00	15.02	30.00	3.65		Pass	15
HE80	MCS0	1	155	484/66	5775	0.00	15.05	30.00	3.65		Pass	15

TEST RESULTS DATA
26dB and 99% OBW

UNII-1										
Mod.	Data Rate	Nrx	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)		Note
					Ant 1	Ant 1	Ant 1	Ant 1		
11a	6Mbps	1	36	5180	16.92	22.98	-	22.28		
11a	6Mbps	1	44	5220	16.92	23.34	-	22.28		
11a	6Mbps	1	48	5240	16.90	23.34	-	22.28		
VHT20	MCS0	1	36	5180	18.06	23.64	-	22.57		
VHT20	MCS0	1	44	5220	18.03	23.94	-	22.56		
VHT20	MCS0	1	48	5240	18.04	23.88	-	22.56		
VHT40	MCS0	1	38	5190	36.86	47.76	-	23.01		
VHT40	MCS0	1	46	5230	36.80	47.76	-	23.01		
VHT80	MCS0	1	42	5210	76.67	94.56	-	23.01		
HE20	MCS0	1	36	5180	19.13	23.34	-	22.82		
HE20	MCS0	1	44	5220	19.10	23.40	-	22.81		
HE20	MCS0	1	48	5240	19.11	23.64	-	22.81		
HE40	MCS0	1	38	5190	38.01	45.48	-	23.01		
HE40	MCS0	1	46	5230	38.03	45.72	-	23.01		
HE80	MCS0	1	42	5210	77.88	93.12	-	23.01		

TEST RESULTS DATA
26dB and 99% OBW

UNII-2A										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
					Ant 1	Ant 1	Ant 1	Ant 1	Ant 1	
11a	6Mbps	1	52	5260	16.92	23.28	23.28	29.28	23.98	
11a	6Mbps	1	60	5300	16.93	23.58	23.29	29.29	23.98	
11a	6Mbps	1	64	5320	16.94	23.52	23.29	29.29	23.98	
VHT20	MCS0	1	52	5260	18.09	24.60	23.57	29.57	23.98	
VHT20	MCS0	1	60	5300	18.19	24.36	23.60	29.60	23.98	
VHT20	MCS0	1	64	5320	18.05	23.88	23.57	29.57	23.98	
VHT40	MCS0	1	54	5270	36.86	48.00	23.98	30.00	23.98	
VHT40	MCS0	1	62	5310	36.82	47.76	23.98	30.00	23.98	
VHT80	MCS0	1	58	5290	76.71	95.04	23.98	30.00	23.98	
VHT160	MCS0	1	50	5250	156.63	180.00	23.98	30.00	23.98	
HE20	MCS0	1	52	5260	19.09	22.98	23.81	29.81	23.98	
HE20	MCS0	1	60	5300	19.12	23.22	23.82	29.82	23.98	
HE20	MCS0	1	64	5320	19.10	23.40	23.81	29.81	23.98	
HE40	MCS0	1	54	5270	38.04	45.84	23.98	30.00	23.98	
HE40	MCS0	1	62	5310	38.02	45.36	23.98	30.00	23.98	
HE80	MCS0	1	58	5290	77.90	92.16	23.98	30.00	23.98	
HE160	MCS0	1	50	5250	157.71	177.60	23.98	30.00	23.98	

TEST RESULTS DATA
26dB and 99% OBW

UNII-2C										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
					Ant 1	Ant 1	Ant 1	Ant 1	Ant 1	
11a	6Mbps	1	100	5500	16.94	23.16	23.29	29.29	23.98	
11a	6Mbps	1	116	5580	16.95	23.52	23.29	29.29	23.98	
11a	6Mbps	1	140	5700	16.91	23.40	23.28	29.28	23.98	
11a	6Mbps	1	144	5720	17.11	31.02	23.33	29.33	23.98	
VHT20	MCS0	1	100	5500	18.08	24.24	23.57	29.57	23.98	
VHT20	MCS0	1	116	5580	18.12	24.24	23.58	29.58	23.98	
VHT20	MCS0	1	140	5700	18.13	25.26	23.58	29.58	23.98	
VHT20	MCS0	1	144	5720	18.12	25.92	23.58	29.58	23.98	
VHT40	MCS0	1	102	5510	36.87	47.16	23.98	30.00	23.98	
VHT40	MCS0	1	110	5550	36.83	46.80	23.98	30.00	23.98	
VHT40	MCS0	1	134	5670	36.96	47.76	23.98	30.00	23.98	
VHT40	MCS0	1	142	5710	36.87	47.76	23.98	30.00	23.98	
VHT80	MCS0	1	106	5530	76.65	96.48	23.98	30.00	23.98	
VHT80	MCS0	1	122	5610	76.77	96.24	23.98	30.00	23.98	
VHT80	MCS0	1	138	5690	76.66	96.00	23.98	30.00	23.98	
VHT160	MCS0	1	114	5570	156.87	179.52	23.98	30.00	23.98	
HE20	MCS0	1	100	5500	19.12	23.58	23.82	29.82	23.98	
HE20	MCS0	1	116	5580	19.09	23.40	23.81	29.81	23.98	
HE20	MCS0	1	140	5700	19.10	23.46	23.81	29.81	23.98	
HE20	MCS0	1	144	5720	19.10	23.34	23.81	29.81	23.98	
HE40	MCS0	1	102	5510	38.06	44.40	23.98	30.00	23.98	
HE40	MCS0	1	110	5550	38.03	45.48	23.98	30.00	23.98	
HE40	MCS0	1	134	5670	38.04	45.48	23.98	30.00	23.98	
HE40	MCS0	1	142	5710	38.01	45.48	23.98	30.00	23.98	
HE80	MCS0	1	106	5530	77.91	93.84	23.98	30.00	23.98	
HE80	MCS0	1	122	5610	77.96	92.64	23.98	30.00	23.98	
HE80	MCS0	1	138	5690	77.90	92.88	23.98	30.00	23.98	
HE160	MCS0	1	114	5570	157.95	178.56	23.98	30.00	23.98	

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

UNII-3										
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	99% Bandwidth (MHz)	26dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
						Ant 1	Ant 1	Ant 1	Ant 1	
11a	6Mbps	1	149	Full	5745	17.11	25.50	16.45	0.5	Pass
11a	6Mbps	1	157	Full	5785	17.02	30.18	16.45	0.5	Pass
11a	6Mbps	1	165	Full	5825	16.90	23.46	16.45	0.5	Pass
VHT20	MCS0	1	149	Full	5745	18.23	26.16	17.75	0.5	Pass
VHT20	MCS0	1	157	Full	5785	18.21	29.16	17.70	0.5	Pass
VHT20	MCS0	1	165	Full	5825	18.10	24.24	17.70	0.5	Pass
VHT40	MCS0	1	151	Full	5755	36.88	47.88	36.54	0.5	Pass
VHT40	MCS0	1	159	Full	5795	36.84	47.64	36.54	0.5	Pass
VHT80	MCS0	1	155	Full	5775	76.62	95.76	76.80	0.5	Pass
HE20	MCS0	1	149	Full	5745	19.12	23.16	19.20	0.5	Pass
HE20	MCS0	1	149	26/0	5745	-	-	2.15	0.5	Pass
HE20	MCS0	1	157	Full	5785	19.14	23.40	19.10	0.5	Pass
HE20	MCS0	1	157	26/0	5785	-	-	2.15	0.5	Pass
HE20	MCS0	1	165	Full	5825	19.08	23.28	19.15	0.5	Pass
HE20	MCS0	1	165	26/8	5825	-	-	2.20	0.5	Pass
HE40	MCS0	1	151	Full	5755	38.03	45.96	38.34	0.5	Pass
HE40	MCS0	1	159	Full	5795	38.03	45.72	38.25	0.5	Pass
HE80	MCS0	1	155	Full	5775	77.91	94.32	78.40	0.5	Pass

TEST RESULTS DATA
Power Spectral Density

FCC UNII-1											
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass /Fail
						Ant 1	Ant 1	Ant 1	Ant 1		
11a	6Mbps	1	36	Full	5180	0.03	3.67	11.00	3.77		Pass
11a	6Mbps	1	44	Full	5220	0.03	3.46	11.00	3.77		Pass
11a	6Mbps	1	48	Full	5240	0.03	3.37	11.00	3.77		Pass
VHT20	MCS0	1	36	Full	5180	0.00	3.28	11.00	3.77		Pass
VHT20	MCS0	1	44	Full	5220	0.00	3.18	11.00	3.77		Pass
VHT20	MCS0	1	48	Full	5240	0.00	3.06	11.00	3.77		Pass
VHT40	MCS0	1	38	Full	5190	0.00	0.07	11.00	3.77		Pass
VHT40	MCS0	1	46	Full	5230	0.00	-0.05	11.00	3.77		Pass
VHT80	MCS0	1	42	Full	5210	0.00	-3.00	11.00	3.77		Pass
HE20	MCS0	1	36	Full	5180	0.00	3.31	11.00	3.77		Pass
				26/0		0.00	4.05	11.00	3.77		Pass
				52/37		0.00	4.38	11.00	3.77		Pass
				106/53		0.00	4.21	11.00	3.77		Pass
HE20	MCS0	1	44	Full	5220	0.00	3.13	11.00	3.77		Pass
				26/0		0.00	3.90	11.00	3.77		Pass
				52/37		0.00	4.33	11.00	3.77		Pass
				106/53		0.00	4.15	11.00	3.77		Pass
HE20	MCS0	1	48	Full	5240	0.00	3.02	11.00	3.77		Pass
				26/8		0.00	3.90	11.00	3.77		Pass
				52/40		0.00	4.31	11.00	3.77		Pass
				106/54		0.00	4.11	11.00	3.77		Pass
HE40	MCS0	1	38	Full	5190	0.00	0.02	11.00	3.77		Pass
				242/61		0.00	2.91	11.00	3.77		Pass
HE40	MCS0	1	46	Full	5230	0.00	-0.12	11.00	3.77		Pass
				242/62		0.00	2.72	11.00	3.77		Pass
HE80	MCS0	1	42	Full	5210	0.00	-2.88	11.00	3.77		Pass
				484/65		0.00	-0.72	11.00	3.77		Pass

TEST RESULTS DATA
Power Spectral Density

UNII-2A											
Mod.	Data Rate	N _{TX}	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass /Fail
						Ant 1	Ant 1	Ant 1	Ant 1		
11a	6Mbps	1	52	Full	5260	0.03	4.83	11.00	3.91		Pass
11a	6Mbps	1	60	Full	5300	0.03	5.05	11.00	3.91		Pass
11a	6Mbps	1	64	Full	5320	0.03	4.42	11.00	3.91		Pass
VHT20	MCS0	1	52	Full	5260	0.00	4.52	11.00	3.91		Pass
VHT20	MCS0	1	60	Full	5300	0.00	4.66	11.00	3.91		Pass
VHT20	MCS0	1	64	Full	5320	0.00	4.15	11.00	3.91		Pass
VHT40	MCS0	1	54	Full	5270	0.00	1.16	11.00	3.91		Pass
VHT40	MCS0	1	62	Full	5310	0.00	1.40	11.00	3.91		Pass
VHT80	MCS0	1	58	Full	5290	0.00	-1.30	11.00	3.91		Pass
VHT160	MCS0	1	50	Full	5250	0.00	-5.34	11.00	3.91		Pass
HE20	MCS0	1	52	Full	5260	0.00	4.52	11.00	3.91		Pass
				26/0		0.00	8.64	11.00	3.91		Pass
				52/37		0.00	8.68	11.00	3.91		Pass
				106/53		0.00	7.18	11.00	3.91		Pass
HE20	MCS0	1	60	Full	5300	0.00	4.59	11.00	3.91		Pass
				26/0		0.00	8.55	11.00	3.91		Pass
				52/37		0.00	8.81	11.00	3.91		Pass
				106/53		0.00	7.27	11.00	3.91		Pass
HE20	MCS0	1	64	Full	5320	0.00	4.13	11.00	3.91		Pass
				26/8		0.00	8.12	11.00	3.91		Pass
				52/40		0.00	8.26	11.00	3.91		Pass
				106/54		0.00	6.57	11.00	3.91		Pass
HE40	MCS0	1	54	Full	5270	0.00	1.50	11.00	3.91		Pass
				242/61		0.00	3.41	11.00	3.91		Pass
HE40	MCS0	1	62	Full	5310	0.00	1.29	11.00	3.91		Pass
				242/62		0.00	3.08	11.00	3.91		Pass
HE80	MCS0	1	58	Full	5290	0.00	-1.74	11.00	3.91		Pass
				484/66		0.00	0.25	11.00	3.91		Pass
HE160	MCS0	1	50	Full	5250	0.00	-4.86	11.00	3.91		Pass
				996/67		0.00	-3.33	11.00	3.91		Pass
				996/S67		0.00	-4.46	11.00	3.91		Pass

TEST RESULTS DATA
Power Spectral Density


UNII-2C											
Mod.	Data Rate	N _{TX}	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass /Fail
						Ant 1					
11a	6Mbps	1	100	Full	5500	0.03	4.43	11.00	3.99		Pass
11a	6Mbps	1	116	Full	5580	0.03	4.60	11.00	3.99		Pass
11a	6Mbps	1	140	Full	5700	0.03	3.98	11.00	3.99		Pass
11a	6Mbps	1	144	Full	5720	0.03	4.34	11.00	3.99		Pass
VHT20	MCS0	1	100	Full	5500	0.00	4.15	11.00	3.99		Pass
VHT20	MCS0	1	116	Full	5580	0.00	4.04	11.00	3.99		Pass
VHT20	MCS0	1	140	Full	5700	0.00	3.68	11.00	3.99		Pass
VHT20	MCS0	1	144	Full	5720	0.00	4.04	11.00	3.99		Pass
VHT40	MCS0	1	102	Full	5510	0.00	1.00	11.00	3.99		Pass
VHT40	MCS0	1	110	Full	5550	0.00	1.05	11.00	3.99		Pass
VHT40	MCS0	1	134	Full	5670	0.00	1.04	11.00	3.99		Pass
VHT40	MCS0	1	142	Full	5710	0.00	0.94	11.00	3.99		Pass
VHT80	MCS0	1	106	Full	5530	0.00	-2.30	11.00	3.99		Pass
VHT80	MCS0	1	122	Full	5610	0.00	-2.01	11.00	3.99		Pass
VHT80	MCS0	1	138	Full	5690	0.00	-1.94	11.00	3.99		Pass
VHT160	MCS0	1	114	Full	5570	0.00	-5.26	11.00	3.99		Pass
HE20	MCS0	1	100	Full	5500	0.00	4.10	11.00	3.99		Pass
				26/0		0.00	8.28	11.00	3.99		Pass
				52/37		0.00	8.32	11.00	3.99		Pass
				106/53		0.00	6.72	11.00	3.99		Pass
HE20	MCS0	1	116	Full	5580	0.00	3.82	11.00	3.99		Pass
				26/0		0.00	8.26	11.00	3.99		Pass
				52/37		0.00	8.29	11.00	3.99		Pass
				106/53		0.00	6.64	11.00	3.99		Pass
HE20	MCS0	1	140	Full	5700	0.00	3.69	11.00	3.99		Pass
				26/8		0.00	8.13	11.00	3.99		Pass
				52/40		0.00	8.15	11.00	3.99		Pass
				106/54		0.00	6.56	11.00	3.99		Pass
HE20	MCS0	1	144	Full	5720	0.00	3.71	11.00	3.99		Pass
				26/8		0.00	8.10	11.00	3.99		Pass
				52/40		0.00	8.06	11.00	3.99		Pass
				106/54		0.00	6.68	11.00	3.99		Pass
HE40	MCS0	1	102	Full	5510	0.00	1.04	11.00	3.99		Pass
				242/61		0.00	2.68	11.00	3.99		Pass
HE40	MCS0	1	110	Full	5550	0.00	1.07	11.00	3.99		Pass
				242/61		0.00	2.97	11.00	3.99		Pass
HE40	MCS0	1	134	Full	5670	0.00	0.78	11.00	3.99		Pass
				242/62		0.00	2.47	11.00	3.99		Pass
HE40	MCS0	1	142	Full	5710	0.00	0.80	11.00	3.99		Pass
				242/62		0.00	2.71	11.00	3.99		Pass
HE80	MCS0	1	106	Full	5530	0.00	-2.23	11.00	3.99		Pass
				484/65		0.00	-2.00	11.00	3.99		Pass
HE80	MCS0	1	122	Full	5610	0.00	-2.16	11.00	3.99		Pass
				484/66		0.00	0.28	11.00	3.99		Pass
HE80	MCS0	1	138	Full	5690	0.00	-1.88	11.00	3.99		Pass
				484/66		0.00	-0.14	11.00	3.99		Pass
HE160	MCS0	1	114	Full	5570	0.00	-4.75	11.00	3.99		Pass
				996/67		0.00	-4.70	11.00	3.99		Pass
				996/S67		0.00	-3.40	11.00	3.99		Pass


TEST RESULTS DATA
Power Spectral Density

UNII-3											
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass /Fail
						Ant 1	Ant 1	Ant 1	Ant 1	Ant 1	
11a	6Mbps	1	149	Full	5745	0.03	2.22	1.25	30.00	3.65	Pass
11a	6Mbps	1	157	Full	5785	0.03	2.22	1.55	30.00	3.65	Pass
11a	6Mbps	1	165	Full	5825	0.03	2.22	1.74	30.00	3.65	Pass
VHT20	MCS0	1	149	Full	5745	0.00	2.22	1.07	30.00	3.65	Pass
VHT20	MCS0	1	157	Full	5785	0.00	2.22	1.09	30.00	3.65	Pass
VHT20	MCS0	1	165	Full	5825	0.00	2.22	1.29	30.00	3.65	Pass
VHT40	MCS0	1	151	Full	5755	0.00	2.22	-1.95	30.00	3.65	Pass
VHT40	MCS0	1	159	Full	5795	0.00	2.22	-2.17	30.00	3.65	Pass
VHT80	MCS0	1	155	Full	5775	0.00	2.22	-4.52	30.00	3.65	Pass
HE20	MCS0	1	149	Full	5745	0.00	2.22	1.13	30.00	3.65	Pass
HE20	MCS0	1	149	26/0	5745	0.00	2.22	8.34	30.00	3.65	Pass
HE20	MCS0	1	149	52/37	5745	0.00	2.22	5.13	30.00	3.65	Pass
HE20	MCS0	1	149	106/53	5745	0.00	2.22	3.43	30.00	3.65	Pass
HE20	MCS0	1	157	Full	5785	0.00	2.22	1.05	30.00	3.65	Pass
HE20	MCS0	1	157	26/0	5785	0.00	2.22	8.52	30.00	3.65	Pass
HE20	MCS0	1	157	52/37	5785	0.00	2.22	5.37	30.00	3.65	Pass
HE20	MCS0	1	157	106/53	5785	0.00	2.22	3.59	30.00	3.65	Pass
HE20	MCS0	1	165	Full	5825	0.00	2.22	1.01	30.00	3.65	Pass
HE20	MCS0	1	165	26/8	5825	0.00	2.22	7.42	30.00	3.65	Pass
HE20	MCS0	1	165	52/40	5825	0.00	2.22	4.70	30.00	3.65	Pass
HE20	MCS0	1	165	106/54	5825	0.00	2.22	3.56	30.00	3.65	Pass
HE40	MCS0	1	151	Full	5755	0.00	2.22	-2.08	30.00	3.65	Pass
HE40	MCS0	1	151	242/61	5755	0.00	2.22	-0.35	30.00	3.65	Pass
HE40	MCS0	1	159	Full	5795	0.00	2.22	-2.46	30.00	3.65	Pass
HE40	MCS0	1	159	242/62	5795	0.00	2.22	-0.18	30.00	3.65	Pass
HE80	MCS0	1	155	Full	5775	0.00	2.22	-4.74	30.00	3.65	Pass
HE80	MCS0	1	155	484/65	5775	0.00	2.22	-2.98	30.00	3.65	Pass
HE80	MCS0	1	155	484/66	5775	0.00	2.22	-2.76	30.00	3.65	Pass



Appendix B. AC Conducted Emission Test Results

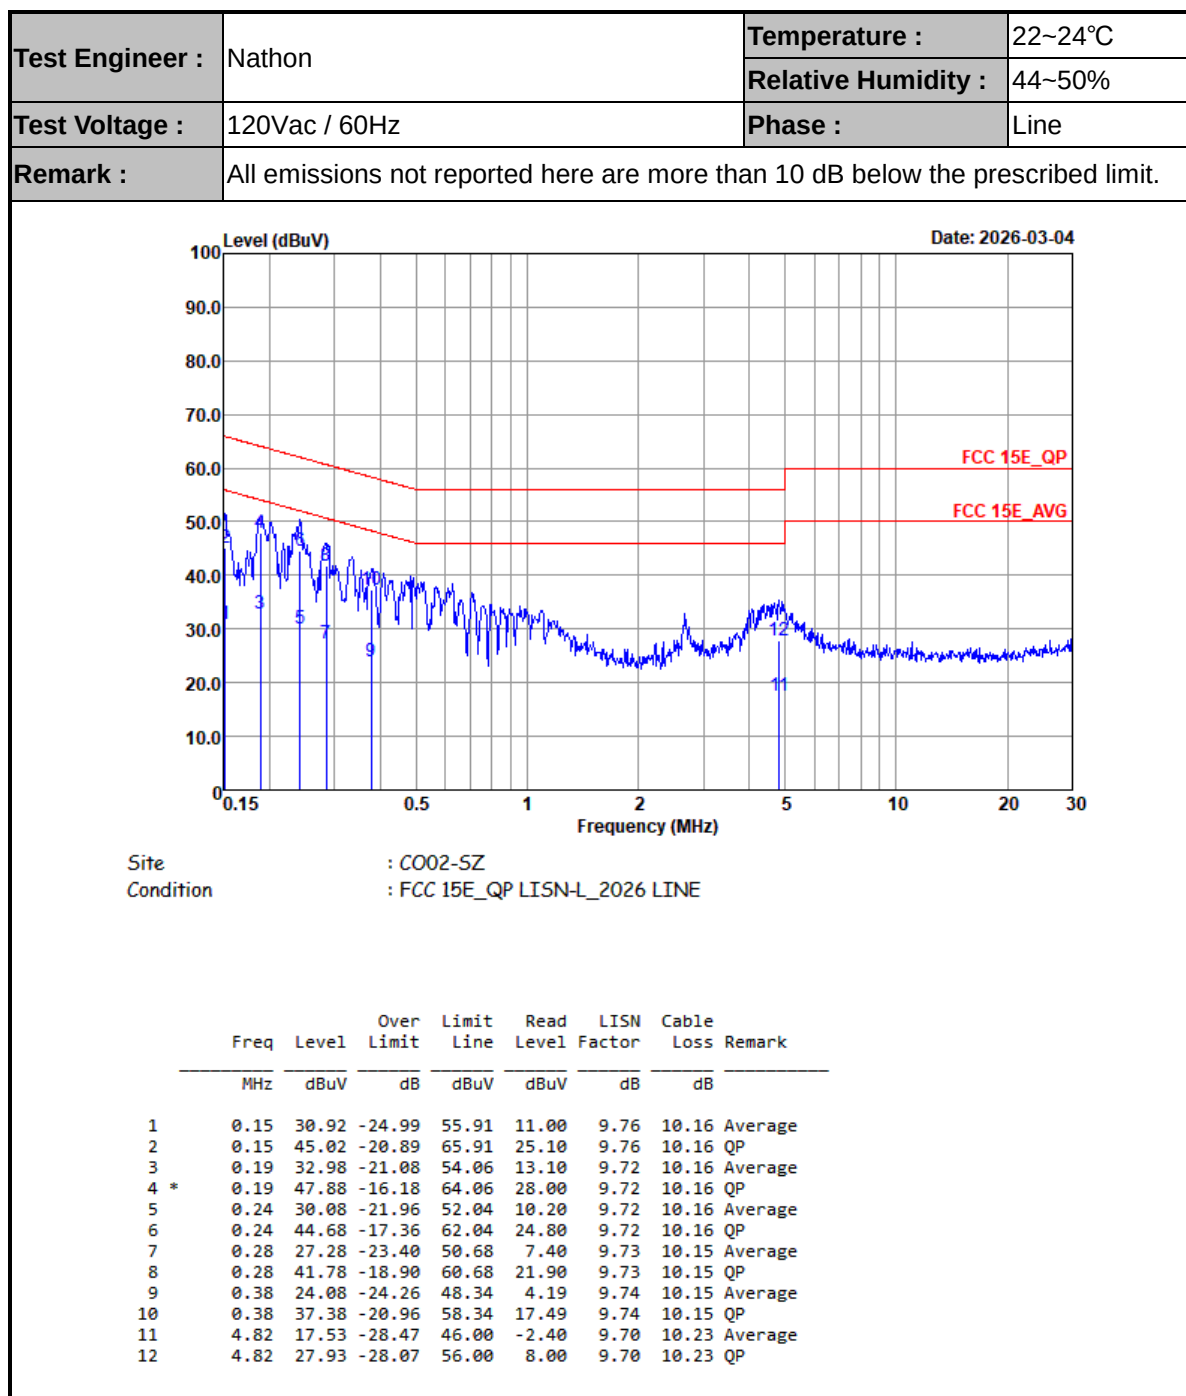

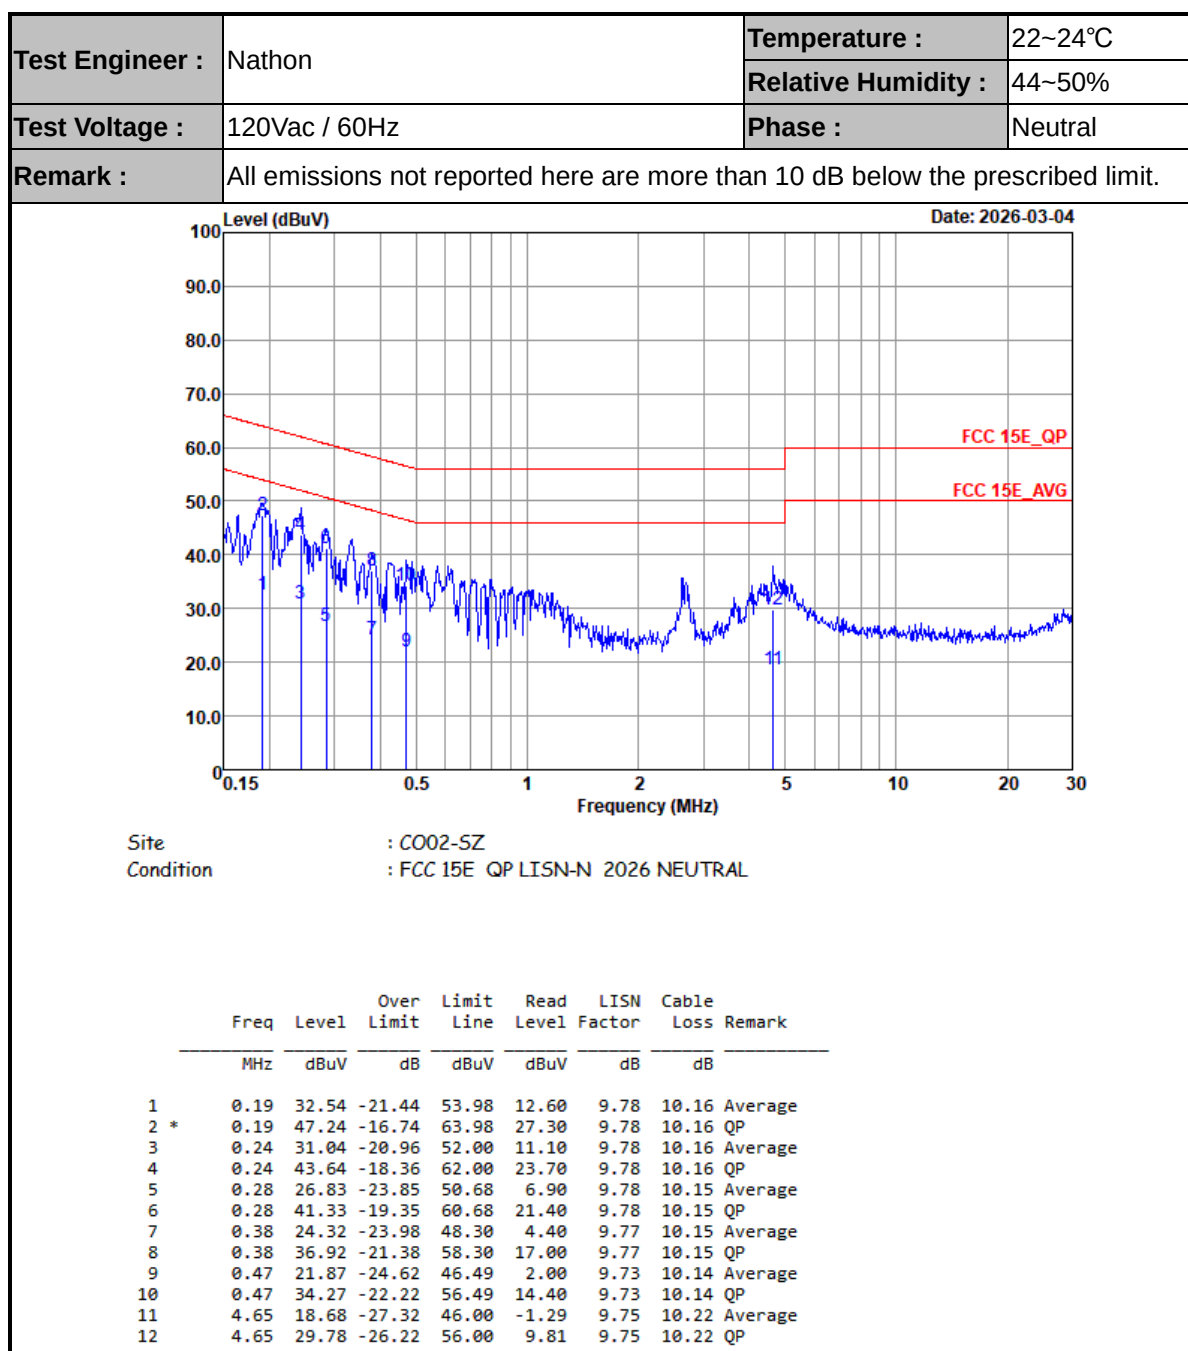

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Reid Huang	Relative Humidity :	48~49%
		Temperature :	24~25℃

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	1	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	1	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	1	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-1	5.15-5.25	1	802.11ac VHT20	36	5180	MCS0	-	-
Mode 5	U-NII-1	5.15-5.25	1	802.11ac VHT20	44	5220	MCS0	-	-
Mode 6	U-NII-1	5.15-5.25	1	802.11ac VHT20	48	5240	MCS0	-	-
Mode 7	U-NII-1	5.15-5.25	1	802.11ac VHT40	38	5190	MCS0	-	-
Mode 8	U-NII-1	5.15-5.25	1	802.11ac VHT40	46	5230	MCS0	-	-
Mode 9	U-NII-1	5.15-5.25	1	802.11ac VHT80	42	5210	MCS0	-	-
Mode 10	U-NII-1/2A	5.15-5.35	1	802.11ac VHT160	50	5250	MCS0	-	-
Mode 11	U-NII-1	5.15-5.25	1	802.11ax HE20	36	5180	MCS0	Full RU	-
Mode 12	U-NII-1	5.15-5.25	1	802.11ax HE20	36	5180	MCS0	Partial_RU26/0	-
Mode 13	U-NII-1	5.15-5.25	1	802.11ax HE20	36	5180	MCS0	Partial_RU52/37	-
Mode 14	U-NII-1	5.15-5.25	1	802.11ax HE20	36	5180	MCS0	Partial_RU106/53	-
Mode 15	U-NII-1	5.15-5.25	1	802.11ax HE20	44	5220	MCS0	Full RU	-
Mode 16	U-NII-1	5.15-5.25	1	802.11ax HE20	48	5240	MCS0	Full RU	-
Mode 17	U-NII-1	5.15-5.25	1	802.11ax HE20	48	5240	MCS0	Partial_RU26/8	-
Mode 18	U-NII-1	5.15-5.25	1	802.11ax HE20	48	5240	MCS0	Partial_RU52/40	-
Mode 19	U-NII-1	5.15-5.25	1	802.11ax HE20	48	5240	MCS0	Partial_RU106/54	-
Mode 20	U-NII-1	5.15-5.25	1	802.11ax HE40	38	5190	MCS0	Full RU	-
Mode 21	U-NII-1	5.15-5.25	1	802.11ax HE40	38	5190	MCS0	Partial_RU242/61	-
Mode 22	U-NII-1	5.15-5.25	1	802.11ax HE40	46	5230	MCS0	Full RU	-
Mode 23	U-NII-1	5.15-5.25	1	802.11ax HE40	46	5230	MCS0	Partial_RU242/62	-
Mode 24	U-NII-1	5.15-5.25	1	802.11ax HE80	42	5210	MCS0	Full RU	-
Mode 25	U-NII-1	5.15-5.25	1	802.11ax HE80	42	5210	MCS0	Partial_RU484/65	-
Mode 26	U-NII-1/2A	5.15-5.35	1	802.11ax HE160	50	5250	MCS0	Full RU	-
Mode 27	U-NII-1/2A	5.15-5.35	1	802.11ax HE160	50	5250	MCS0	Partial_RU996/67	-
Mode 28	U-NII-2A	5.25-5.35	1	802.11a	52	5260	6Mbps	-	-
Mode 29	U-NII-2A	5.25-5.35	1	802.11a	60	5300	6Mbps	-	-
Mode 30	U-NII-2A	5.25-5.35	1	802.11a	64	5320	6Mbps	-	-
Mode 31	U-NII-2A	5.25-5.35	1	802.11ac VHT20	52	5260	MCS0	-	-
Mode 32	U-NII-2A	5.25-5.35	1	802.11ac VHT20	60	5300	MCS0	-	-
Mode 33	U-NII-2A	5.25-5.35	1	802.11ac VHT20	64	5320	MCS0	-	-
Mode 34	U-NII-2A	5.25-5.35	1	802.11ac VHT40	54	5270	MCS0	-	-
Mode 35	U-NII-2A	5.25-5.35	1	802.11ac VHT40	62	5310	MCS0	-	-
Mode 36	U-NII-2A	5.25-5.35	1	802.11ac VHT80	58	5290	MCS0	-	-
Mode 37	U-NII-2A	5.25-5.35	1	802.11ax HE20	52	5260	MCS0	Full RU	-
Mode 38	U-NII-2A	5.25-5.35	1	802.11ax HE20	52	5260	MCS0	Partial_RU26/0	-



Mode 39	U-NII-2A	5.25-5.35	1	802.11ax HE20	52	5260	MCS0	Partial_RU52/37	-
Mode 40	U-NII-2A	5.25-5.35	1	802.11ax HE20	52	5260	MCS0	Partial_RU106/53	-
Mode 41	U-NII-2A	5.25-5.35	1	802.11ax HE20	60	5300	MCS0	Full RU	-
Mode 42	U-NII-2A	5.25-5.35	1	802.11ax HE20	64	5320	MCS0	Full RU	-
Mode 43	U-NII-2A	5.25-5.35	1	802.11ax HE20	64	5320	MCS0	Partial_RU26/8	-
Mode 44	U-NII-2A	5.25-5.35	1	802.11ax HE20	64	5320	MCS0	Partial_RU52/40	-
Mode 45	U-NII-2A	5.25-5.35	1	802.11ax HE20	64	5320	MCS0	Partial_RU106/54	-
Mode 46	U-NII-2A	5.25-5.35	1	802.11ax HE40	54	5270	MCS0	Full RU	-
Mode 47	U-NII-2A	5.25-5.35	1	802.11ax HE40	54	5270	MCS0	Partial_RU242/61	-
Mode 48	U-NII-2A	5.25-5.35	1	802.11ax HE40	62	5310	MCS0	Full RU	-
Mode 49	U-NII-2A	5.25-5.35	1	802.11ax HE40	62	5310	MCS0	Partial_RU242/62	-
Mode 50	U-NII-2A	5.25-5.35	1	802.11ax HE80	58	5290	MCS0	Full RU	-
Mode 51	U-NII-2A	5.25-5.35	1	802.11ax HE80	58	5290	MCS0	Partial_RU484/66	-
Mode 52	U-NII-2C	5.47-5.725	1	802.11a	100	5500	6Mbps	-	-
Mode 53	U-NII-2C	5.47-5.725	1	802.11a	116	5580	6Mbps	-	-
Mode 54	U-NII-2C	5.47-5.725	1	802.11a	140	5700	6Mbps	-	-
Mode 55	U-NII-2C	5.47-5.725	1	802.11a	144	5720	6Mbps	-	-
Mode 56	U-NII-2C	5.47-5.725	1	802.11ac VHT20	100	5500	MCS0	-	-
Mode 57	U-NII-2C	5.47-5.725	1	802.11ac VHT20	116	5580	MCS0	-	-
Mode 58	U-NII-2C	5.47-5.725	1	802.11ac VHT20	140	5700	MCS0	-	-
Mode 59	U-NII-2C	5.47-5.725	1	802.11ac VHT20	144	5720	MCS0	-	-
Mode 60	U-NII-2C	5.47-5.725	1	802.11ac VHT40	102	5510	MCS0	-	-
Mode 61	U-NII-2C	5.47-5.725	1	802.11ac VHT40	110	5550	MCS0	-	-
Mode 62	U-NII-2C	5.47-5.725	1	802.11ac VHT40	134	5670	MCS0	-	-
Mode 63	U-NII-2C	5.47-5.725	1	802.11ac VHT40	142	5710	MCS0	-	-
Mode 64	U-NII-2C	5.47-5.725	1	802.11ac VHT80	106	5530	MCS0	-	-
Mode 65	U-NII-2C	5.47-5.725	1	802.11ac VHT80	122	5610	MCS0	-	-
Mode 66	U-NII-2C	5.47-5.725	1	802.11ac VHT80	138	5690	MCS0	-	-
Mode 67	U-NII-2C	5.47-5.725	1	802.11ac VHT160	114	5570	MCS0	-	-
Mode 68	U-NII-2C	5.47-5.725	1	802.11ax HE20	100	5500	MCS0	Full RU	-
Mode 69	U-NII-2C	5.47-5.725	1	802.11ax HE20	100	5500	MCS0	Partial_RU26/0	-
Mode 70	U-NII-2C	5.47-5.725	1	802.11ax HE20	100	5500	MCS0	Partial_RU52/37	-
Mode 71	U-NII-2C	5.47-5.725	1	802.11ax HE20	100	5500	MCS0	Partial_RU106/53	-
Mode 72	U-NII-2C	5.47-5.725	1	802.11ax HE20	116	5580	MCS0	Full RU	-
Mode 73	U-NII-2C	5.47-5.725	1	802.11ax HE20	140	5700	MCS0	Full RU	-
Mode 74	U-NII-2C	5.47-5.725	1	802.11ax HE20	140	5700	MCS0	Partial_RU26/8	-
Mode 75	U-NII-2C	5.47-5.725	1	802.11ax HE20	140	5700	MCS0	Partial_RU52/40	-
Mode 76	U-NII-2C	5.47-5.725	1	802.11ax HE20	140	5700	MCS0	Partial_RU106/54	-
Mode 77	U-NII-2C	5.47-5.725	1	802.11ax HE20	144	5720	MCS0	Full RU	-
Mode 78	U-NII-2C	5.47-5.725	1	802.11ax HE20	144	5720	MCS0	Partial_RU26/8	-
Mode 79	U-NII-2C	5.47-5.725	1	802.11ax HE20	144	5720	MCS0	Partial_RU52/40	-
Mode 80	U-NII-2C	5.47-5.725	1	802.11ax HE20	144	5720	MCS0	Partial_RU106/54	-
Mode 81	U-NII-2C	5.47-5.725	1	802.11ax HE40	102	5510	MCS0	Full RU	-
Mode 82	U-NII-2C	5.47-5.725	1	802.11ax HE40	102	5510	MCS0	Partial_RU242/61	-
Mode 83	U-NII-2C	5.47-5.725	1	802.11ax HE40	110	5550	MCS0	Full RU	-
Mode 84	U-NII-2C	5.47-5.725	1	802.11ax HE40	110	5550	MCS0	Partial_RU242/61	-



Mode 85	U-NII-2C	5.47-5.725	1	802.11ax HE40	134	5670	MCS0	Full RU	-
Mode 86	U-NII-2C	5.47-5.725	1	802.11ax HE40	134	5670	MCS0	Partial_RU242/62	-
Mode 87	U-NII-2C	5.47-5.725	1	802.11ax HE40	142	5710	MCS0	Full RU	-
Mode 88	U-NII-2C	5.47-5.725	1	802.11ax HE40	142	5710	MCS0	Partial_RU242/62	-
Mode 89	U-NII-2C	5.47-5.725	1	802.11ax HE80	106	5530	MCS0	Full RU	-
Mode 90	U-NII-2C	5.47-5.725	1	802.11ax HE80	106	5530	MCS0	Partial_RU484/65	-
Mode 91	U-NII-2C	5.47-5.725	1	802.11ax HE80	122	5610	MCS0	Full RU	-
Mode 92	U-NII-2C	5.47-5.725	1	802.11ax HE80	122	5610	MCS0	Partial_RU484/66	-
Mode 93	U-NII-2C	5.47-5.725	1	802.11ax HE80	138	5690	MCS0	Full RU	-
Mode 94	U-NII-2C	5.47-5.725	1	802.11ax HE80	138	5690	MCS0	Partial_RU484/66	-
Mode 95	U-NII-2C	5.47-5.725	1	802.11ax HE160	114	5570	MCS0	Full RU	-
Mode 96	U-NII-2C	5.47-5.725	1	802.11ax HE160	114	5570	MCS0	Partial_RU996/67	-
Mode 97	U-NII-3	5.725-5.85	1	802.11a	149	5745	6Mbps	-	-
Mode 98	U-NII-3	5.725-5.85	1	802.11a	157	5785	6Mbps	-	-
Mode 99	U-NII-3	5.725-5.85	1	802.11a	165	5825	6Mbps	-	-
Mode 100	U-NII-3	5.725-5.85	1	802.11ac VHT20	149	5745	MCS0	-	-
Mode 101	U-NII-3	5.725-5.85	1	802.11ac VHT20	157	5785	MCS0	-	-
Mode 102	U-NII-3	5.725-5.85	1	802.11ac VHT20	165	5825	MCS0	-	-
Mode 103	U-NII-3	5.725-5.85	1	802.11ac VHT40	151	5755	MCS0	-	-
Mode 104	U-NII-3	5.725-5.85	1	802.11ac VHT40	159	5795	MCS0	-	-
Mode 105	U-NII-3	5.725-5.85	1	802.11ac VHT80	155	5775	MCS0	-	-
Mode 106	U-NII-3	5.725-5.85	1	802.11ax HE20	149	5745	MCS0	Full RU	-
Mode 107	U-NII-3	5.725-5.85	1	802.11ax HE20	149	5745	MCS0	Partial_RU26/0	-
Mode 108	U-NII-3	5.725-5.85	1	802.11ax HE20	149	5745	MCS0	Partial_RU52/37	-
Mode 109	U-NII-3	5.725-5.85	1	802.11ax HE20	149	5745	MCS0	Partial_RU106/53	-
Mode 110	U-NII-3	5.725-5.85	1	802.11ax HE20	157	5785	MCS0	Full RU	-
Mode 111	U-NII-3	5.725-5.85	1	802.11ax HE20	165	5825	MCS0	Full RU	-
Mode 112	U-NII-3	5.725-5.85	1	802.11ax HE20	165	5825	MCS0	Partial_RU26/8	-
Mode 113	U-NII-3	5.725-5.85	1	802.11ax HE20	165	5825	MCS0	Partial_RU52/40	-
Mode 114	U-NII-3	5.725-5.85	1	802.11ax HE20	165	5825	MCS0	Partial_RU106/54	-
Mode 115	U-NII-3	5.725-5.85	1	802.11ax HE40	151	5755	MCS0	Full RU	-
Mode 116	U-NII-3	5.725-5.85	1	802.11ax HE40	151	5755	MCS0	Partial_RU242/61	-
Mode 117	U-NII-3	5.725-5.85	1	802.11ax HE40	159	5795	MCS0	Full RU	-
Mode 118	U-NII-3	5.725-5.85	1	802.11ax HE40	159	5795	MCS0	Partial_RU242/62	-
Mode 119	U-NII-3	5.725-5.85	1	802.11ax HE80	155	5775	MCS0	Full RU	-
Mode 120	U-NII-3	5.725-5.85	1	802.11ax HE80	155	5775	MCS0	Partial_RU484/65	-
Mode 121	U-NII-3	5.725-5.85	1	802.11ax HE80	155	5775	MCS0	Partial_RU484/66	-
Mode 122	U-NII-2C	5.47-5.725	1	802.11ax HE160	114	5570	MCS0	Partial_RU996/S67	-
Mode 123	U-NII-2A	5.25-5.35	1	802.11ax HE80_LF	58	5290	MCS0	Full RU	-
Mode 124	U-NII-3	5.725-5.85	1	802.11ac VHT80_LF	155	5775	MCS0	-	-
Mode 125	U-NII-2A	5.25-5.35	1	802.11ax HE80	58	5290	MCS0	Full RU	Sample2
Mode 126	U-NII-3	5.725-5.85	1	802.11ac VHT80	155	5775	MCS0	-	Sample2
Mode 127	U-NII-2A	5.25-5.35	1	802.11ax HE80	58	5290	MCS0	Full RU	Sample3
Mode 128	U-NII-3	5.725-5.85	1	802.11ac VHT80	155	5775	MCS0	-	Sample3
Mode 129	U-NII-2A	5.25-5.35	1	802.11ax HE80	58	5290	MCS0	Full RU	Sample4



Mode 130	U-NII-3	5.725-5.85	1	802.11ac VHT80	155	5775	MCS0	-	Sample4
Mode 131	U-NII-1/2A	5.15-5.35	1	802.11ax HE160	50	5250	MCS0	Partial_RU996/S67	-
Mode 132	CO_TX	1	Bluetooth-LE_GFSK	39	2480	2Mbps	-	-	
	CO_TX	1	802.11ax HE80	58	5290	MCS0	Full RU	-	

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5149.22	42.93	54.00	-11.07	H	AVERAGE	Pass	Band Edge
1	802.11a	36	10360.00	48.85	68.30	-19.45	H	Peak	Pass	Harmonic
2	802.11a	44	5148.28	42.96	54.00	-11.04	H	AVERAGE	Pass	Band Edge
2	802.11a	44	10440.00	48.75	68.30	-19.55	V	Peak	Pass	Harmonic
3	802.11a	48	5067.20	42.87	54.00	-11.13	V	AVERAGE	Pass	Band Edge
3	802.11a	48	10480.00	47.69	68.30	-20.61	V	Peak	Pass	Harmonic
4	802.11ac VHT20	36	5149.76	43.92	54.00	-10.08	H	AVERAGE	Pass	Band Edge
4	802.11ac VHT20	36	10360.00	47.74	68.30	-20.56	V	Peak	Pass	Harmonic
5	802.11ac VHT20	44	-	-	-	-	-	-	-	Band Edge
5	802.11ac VHT20	44	10440.00	47.80	68.30	-20.50	H	Peak	Pass	Harmonic
6	802.11ac VHT20	48	5076.56	42.69	54.00	-11.31	H	AVERAGE	Pass	Band Edge
6	802.11ac VHT20	48	10480.00	48.15	68.30	-20.15	V	Peak	Pass	Harmonic
7	802.11ac VHT40	38	5147.25	47.83	54.00	-6.17	V	AVERAGE	Pass	Band Edge
7	802.11ac VHT40	38	-	-	-	-	-	-	-	Harmonic
8	802.11ac VHT40	46	5146.05	43.03	54.00	-10.97	H	AVERAGE	Pass	Band Edge
8	802.11ac VHT40	46	-	-	-	-	-	-	-	Harmonic
9	802.11ac VHT80	42	5126.63	44.02	54.00	-9.98	V	AVERAGE	Pass	Band Edge
9	802.11ac VHT80	42	-	-	-	-	-	-	-	Harmonic
10	802.11ac VHT160	50	5139.75	49.51	54.00	-4.49	H	AVERAGE	Pass	Band Edge
10	802.11ac VHT160	50	-	-	-	-	-	-	-	Harmonic
11	802.11ax HE20	36	5146.88	43.11	54.00	-10.89	H	AVERAGE	Pass	Band Edge
11	802.11ax HE20	36	10360.00	48.07	68.30	-20.23	H	Peak	Pass	Harmonic
12	802.11ax HE20	36	5078.66	42.72	54.00	-11.28	H	AVERAGE	Pass	Band Edge
12	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
13	802.11ax HE20	36	5063.36	42.47	54.00	-11.53	V	AVERAGE	Pass	Band Edge
13	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
14	802.11ax HE20	36	5147.06	42.46	54.00	-11.54	H	AVERAGE	Pass	Band Edge
14	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
15	802.11ax HE20	44	-	-	-	-	-	-	-	Band Edge
15	802.11ax HE20	44	10440.00	47.29	68.30	-21.01	H	Peak	Pass	Harmonic
16	802.11ax HE20	48	5078.96	42.55	54.00	-11.45	V	AVERAGE	Pass	Band Edge
16	802.11ax HE20	48	10480.00	47.22	68.30	-21.08	V	Peak	Pass	Harmonic
17	802.11ax HE20	48	5098.88	42.50	54.00	-11.50	H	AVERAGE	Pass	Band Edge
17	802.11ax HE20	48	-	-	-	-	-	-	-	Harmonic
18	802.11ax HE20	48	5066.00	42.54	54.00	-11.46	H	AVERAGE	Pass	Band Edge
18	802.11ax HE20	48	-	-	-	-	-	-	-	Harmonic
19	802.11ax HE20	48	5072.24	42.45	54.00	-11.55	H	AVERAGE	Pass	Band Edge



19	802.11ax HE20	48	-	-	-	-	-	-	-	Harmonic
20	802.11ax HE40	38	5145.16	43.60	54.00	-10.40	H	AVERAGE	Pass	Band Edge
20	802.11ax HE40	38	-	-	-	-	-	-	-	Harmonic
21	802.11ax HE40	38	5149.34	43.24	54.00	-10.76	H	AVERAGE	Pass	Band Edge
21	802.11ax HE40	38	-	-	-	-	-	-	-	Harmonic
22	802.11ax HE40	46	5138.92	43.02	54.00	-10.98	H	AVERAGE	Pass	Band Edge
22	802.11ax HE40	46	-	-	-	-	-	-	-	Harmonic
23	802.11ax HE40	46	5137.31	42.51	54.00	-11.49	V	AVERAGE	Pass	Band Edge
23	802.11ax HE40	46	-	-	-	-	-	-	-	Harmonic
24	802.11ax HE80	42	5142.17	44.85	54.00	-9.15	V	AVERAGE	Pass	Band Edge
24	802.11ax HE80	42	-	-	-	-	-	-	-	Harmonic
25	802.11ax HE80	42	5149.52	49.09	54.00	-4.91	H	AVERAGE	Pass	Band Edge
25	802.11ax HE80	42	-	-	-	-	-	-	-	Harmonic
26	802.11ax HE160	50	5407.50	45.56	54.00	-8.44	V	AVERAGE	Pass	Band Edge
26	802.11ax HE160	50	-	-	-	-	-	-	-	Harmonic
27	802.11ax HE160	50	5149.25	47.35	54.00	-6.65	H	AVERAGE	Pass	Band Edge
27	802.11ax HE160	50	-	-	-	-	-	-	-	Harmonic
28	802.11a	52	5063.70	42.68	54.00	-11.32	H	AVERAGE	Pass	Band Edge
28	802.11a	52	10520.00	47.76	68.30	-20.54	H	Peak	Pass	Harmonic
29	802.11a	60	5073.20	42.56	54.00	-11.44	V	AVERAGE	Pass	Band Edge
29	802.11a	60	10600.00	48.25	74.00	-25.75	V	Peak	Pass	Harmonic
30	802.11a	64	5350.10	43.98	54.00	-10.02	H	AVERAGE	Pass	Band Edge
30	802.11a	64	15960.00	48.00	74.00	-26.00	V	Peak	Pass	Harmonic
31	802.11ac VHT20	52	5112.06	42.38	54.00	-11.62	V	AVERAGE	Pass	Band Edge
31	802.11ac VHT20	52	10520.00	46.83	68.30	-21.47	V	Peak	Pass	Harmonic
32	802.11ac VHT20	60	-	-	-	-	-	-	-	Band Edge
32	802.11ac VHT20	60	15900.00	48.05	74.00	-25.95	V	Peak	Pass	Harmonic
33	802.11ac VHT20	64	5350.38	42.12	54.00	-11.88	H	AVERAGE	Pass	Band Edge
33	802.11ac VHT20	64	15960.00	48.29	74.00	-25.71	V	Peak	Pass	Harmonic
34	802.11ac VHT40	54	5127.17	43.01	54.00	-10.99	H	AVERAGE	Pass	Band Edge
34	802.11ac VHT40	54	-	-	-	-	-	-	-	Harmonic
35	802.11ac VHT40	62	5350.05	48.97	54.00	-5.03	H	AVERAGE	Pass	Band Edge
35	802.11ac VHT40	62	-	-	-	-	-	-	-	Harmonic
36	802.11ac VHT80	58	5361.06	49.20	54.00	-4.80	H	AVERAGE	Pass	Band Edge
36	802.11ac VHT80	58	-	-	-	-	-	-	-	Harmonic
37	802.11ax HE20	52	5034.06	42.52	54.00	-11.48	H	AVERAGE	Pass	Band Edge
37	802.11ax HE20	52	10520.00	48.05	68.30	-20.25	V	Peak	Pass	Harmonic
38	802.11ax HE20	52	5071.24	42.47	54.00	-11.53	H	AVERAGE	Pass	Band Edge
38	802.11ax HE20	52	-	-	-	-	-	-	-	Harmonic
39	802.11ax HE20	52	5070.98	42.52	54.00	-11.48	H	AVERAGE	Pass	Band Edge
39	802.11ax HE20	52	-	-	-	-	-	-	-	Harmonic
40	802.11ax HE20	52	5040.30	42.46	54.00	-11.54	H	AVERAGE	Pass	Band Edge
40	802.11ax HE20	52	-	-	-	-	-	-	-	Harmonic
41	802.11ax HE20	60	-	-	-	-	-	-	-	Band Edge
41	802.11ax HE20	60	15900.00	48.94	74.00	-25.06	V	Peak	Pass	Harmonic
42	802.11ax HE20	64	5350.66	42.25	54.00	-11.75	H	AVERAGE	Pass	Band Edge



42	802.11ax HE20	64	15960.00	49.26	74.00	-24.74	H	Peak	Pass	Harmonic
43	802.11ax HE20	64	5354.72	42.29	54.00	-11.71	H	AVERAGE	Pass	Band Edge
43	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
44	802.11ax HE20	64	5352.34	42.64	54.00	-11.36	H	AVERAGE	Pass	Band Edge
44	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
45	802.11ax HE20	64	5357.10	42.72	54.00	-11.28	H	AVERAGE	Pass	Band Edge
45	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
46	802.11ax HE40	54	5149.04	43.04	54.00	-10.96	H	AVERAGE	Pass	Band Edge
46	802.11ax HE40	54	-	-	-	-	-	-	-	Harmonic
47	802.11ax HE40	54	5118.80	42.61	54.00	-11.39	V	AVERAGE	Pass	Band Edge
47	802.11ax HE40	54	-	-	-	-	-	-	-	Harmonic
48	802.11ax HE40	62	5355.30	45.21	54.00	-8.79	H	AVERAGE	Pass	Band Edge
48	802.11ax HE40	62	-	-	-	-	-	-	-	Harmonic
49	802.11ax HE40	62	5351.25	43.61	54.00	-10.39	H	AVERAGE	Pass	Band Edge
49	802.11ax HE40	62	-	-	-	-	-	-	-	Harmonic
50	802.11ax HE80	58	5375.17	49.73	54.00	-4.27	H	AVERAGE	Pass	Band Edge
50	802.11ax HE80	58	10580.00	47.49	68.30	-20.81	V	Peak	Pass	Harmonic
51	802.11ax HE80	58	5350.35	49.67	54.00	-4.33	H	AVERAGE	Pass	Band Edge
51	802.11ax HE80	58	-	-	-	-	-	-	-	Harmonic
52	802.11a	100	5459.95	42.47	54.00	-11.53	H	AVERAGE	Pass	Band Edge
52	802.11a	100	16500.00	49.07	68.30	-19.23	H	Peak	Pass	Harmonic
53	802.11a	116	5454.19	41.83	54.00	-12.17	H	AVERAGE	Pass	Band Edge
53	802.11a	116	16740.00	47.86	68.30	-20.44	V	Peak	Pass	Harmonic
54	802.11a	140	5730.75	58.22	68.30	-10.08	H	PEAK	Pass	Band Edge
54	802.11a	140	17100.00	48.20	68.30	-20.10	H	Peak	Pass	Harmonic
55	802.11a	144	5451.75	40.92	54.00	-13.08	H	Average	Pass	Band Edge
55	802.11a	144	17160.00	47.75	68.30	-20.55	V	Peak	Pass	Harmonic
56	802.11ac VHT20	100	5459.95	42.42	54.00	-11.58	H	AVERAGE	Pass	Band Edge
56	802.11ac VHT20	100	16500.00	49.99	68.30	-18.31	V	Peak	Pass	Harmonic
57	802.11ac VHT20	116	-	-	-	-	-	-	-	Band Edge
57	802.11ac VHT20	116	16740.00	46.46	68.30	-21.84	H	Peak	Pass	Harmonic
58	802.11ac VHT20	140	5726.91	62.12	68.30	-6.18	H	PEAK	Pass	Band Edge
58	802.11ac VHT20	140	17100.00	49.46	68.30	-18.84	H	Peak	Pass	Harmonic
59	802.11ac VHT20	144	5456.15	41.01	54.00	-12.99	H	Average	Pass	Band Edge
59	802.11ac VHT20	144	17160.00	48.62	68.30	-19.68	H	Peak	Pass	Harmonic
60	802.11ac VHT40	102	5459.92	44.76	54.00	-9.24	H	AVERAGE	Pass	Band Edge
60	802.11ac VHT40	102	-	-	-	-	-	-	-	Harmonic
61	802.11ac VHT40	110	5460.00	42.64	54.00	-11.36	H	AVERAGE	Pass	Band Edge
61	802.11ac VHT40	110	-	-	-	-	-	-	-	Harmonic
62	802.11ac VHT40	134	5448.88	41.86	54.00	-12.14	H	AVERAGE	Pass	Band Edge
62	802.11ac VHT40	134	-	-	-	-	-	-	-	Harmonic
63	802.11ac VHT40	142	5450.10	40.89	54.00	-13.11	H	Average	Pass	Band Edge
63	802.11ac VHT40	142	5450.10	40.89	54.00	-13.11	H	Average	Pass	Harmonic
64	802.11ac VHT80	106	5453.50	47.93	54.00	-6.07	H	AVERAGE	Pass	Band Edge
64	802.11ac VHT80	106	-	-	-	-	-	-	-	Harmonic
65	802.11ac VHT80	122	5455.04	42.40	54.00	-11.60	H	AVERAGE	Pass	Band Edge



65	802.11ac VHT80	122	-	-	-	-	-	-	-	Harmonic
66	802.11ac VHT80	138	5457.80	41.32	54.00	-12.68	H	Average	Pass	Band Edge
66	802.11ac VHT80	138	-	-	-	-	-	-	-	Harmonic
67	802.11ac VHT160	114	5442.40	49.25	54.00	-4.75	H	AVERAGE	Pass	Band Edge
67	802.11ac VHT160	114	-	-	-	-	-	-	-	Harmonic
68	802.11ax HE20	100	5459.95	43.09	54.00	-10.91	H	AVERAGE	Pass	Band Edge
68	802.11ax HE20	100	16500.00	48.82	68.30	-19.48	V	Peak	Pass	Harmonic
69	802.11ax HE20	100	5455.45	42.48	54.00	-11.52	H	AVERAGE	Pass	Band Edge
69	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
70	802.11ax HE20	100	5454.55	43.18	54.00	-10.82	H	AVERAGE	Pass	Band Edge
70	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
71	802.11ax HE20	100	5458.75	43.63	54.00	-10.37	H	AVERAGE	Pass	Band Edge
71	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
72	802.11ax HE20	116	-	-	-	-	-	-	-	Band Edge
72	802.11ax HE20	116	16740.00	46.69	68.30	-21.61	V	Peak	Pass	Harmonic
73	802.11ax HE20	140	5725.29	58.71	68.30	-9.59	V	PEAK	Pass	Band Edge
73	802.11ax HE20	140	17100.00	48.54	68.30	-19.76	V	Peak	Pass	Harmonic
74	802.11ax HE20	140	5755.38	52.67	68.30	-15.63	V	PEAK	Pass	Band Edge
74	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
75	802.11ax HE20	140	5753.11	52.86	68.30	-15.44	V	PEAK	Pass	Band Edge
75	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
76	802.11ax HE20	140	5725.35	55.68	68.30	-12.62	V	PEAK	Pass	Band Edge
76	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
77	802.11ax HE20	144	5454.50	40.83	54.00	-13.17	H	Average	Pass	Band Edge
77	802.11ax HE20	144	17160.00	49.96	68.30	-18.34	H	Peak	Pass	Harmonic
78	802.11ax HE20	144	5460.00	40.94	54.00	-13.06	H	Average	Pass	Band Edge
78	802.11ax HE20	144	-	-	-	-	-	-	-	Harmonic
79	802.11ax HE20	144	5453.95	40.93	54.00	-13.07	H	Average	Pass	Band Edge
79	802.11ax HE20	144	-	-	-	-	-	-	-	Harmonic
80	802.11ax HE20	144	5457.80	40.95	54.00	-13.05	H	Average	Pass	Band Edge
80	802.11ax HE20	144	-	-	-	-	-	-	-	Harmonic
81	802.11ax HE40	102	5459.92	48.58	54.00	-5.42	H	AVERAGE	Pass	Band Edge
81	802.11ax HE40	102	-	-	-	-	-	-	-	Harmonic
82	802.11ax HE40	102	5459.92	43.34	54.00	-10.66	H	AVERAGE	Pass	Band Edge
82	802.11ax HE40	102	-	-	-	-	-	-	-	Harmonic
83	802.11ax HE40	110	5457.60	42.51	54.00	-11.49	H	AVERAGE	Pass	Band Edge
83	802.11ax HE40	110	-	-	-	-	-	-	-	Harmonic
84	802.11ax HE40	110	5452.00	42.44	54.00	-11.56	H	AVERAGE	Pass	Band Edge
84	802.11ax HE40	110	-	-	-	-	-	-	-	Harmonic
85	802.11ax HE40	134	5455.92	41.89	54.00	-12.11	H	AVERAGE	Pass	Band Edge
85	802.11ax HE40	134	-	-	-	-	-	-	-	Harmonic
86	802.11ax HE40	134	5396.40	41.89	54.00	-12.11	H	AVERAGE	Pass	Band Edge
86	802.11ax HE40	134	-	-	-	-	-	-	-	Harmonic
87	802.11ax HE40	142	5455.60	40.82	54.00	-13.18	H	Average	Pass	Band Edge
87	802.11ax HE40	142	-	-	-	-	-	-	-	Harmonic
88	802.11ax HE40	142	5459.45	41.01	54.00	-12.99	H	Average	Pass	Band Edge







88	802.11ax HE40	142	-	-	-	-	-	-	-	Harmonic
89	802.11ax HE80	106	5446.12	47.26	54.00	-6.74	V	AVERAGE	Pass	Band Edge
89	802.11ax HE80	106	-	-	-	-	-	-	-	Harmonic
90	802.11ax HE80	106	5466.82	58.08	68.30	-10.22	H	PEAK	Pass	Band Edge
90	802.11ax HE80	106	-	-	-	-	-	-	-	Harmonic
91	802.11ax HE80	122	5446.98	42.51	54.00	-11.49	H	AVERAGE	Pass	Band Edge
91	802.11ax HE80	122	-	-	-	-	-	-	-	Harmonic
92	802.11ax HE80	122	5449.06	42.53	54.00	-11.47	H	AVERAGE	Pass	Band Edge
92	802.11ax HE80	122	-	-	-	-	-	-	-	Harmonic
93	802.11ax HE80	138	5456.70	41.09	54.00	-12.91	H	Average	Pass	Band Edge
93	802.11ax HE80	138	-	-	-	-	-	-	-	Harmonic
94	802.11ax HE80	138	5448.45	41.45	54.00	-12.55	H	Average	Pass	Band Edge
94	802.11ax HE80	138	-	-	-	-	-	-	-	Harmonic
95	802.11ax HE160	114	5459.34	48.09	54.00	-5.91	H	AVERAGE	Pass	Band Edge
95	802.11ax HE160	114	-	-	-	-	-	-	-	Harmonic
96	802.11ax HE160	114	5469.46	62.86	68.30	-5.44	V	PEAK	Pass	Band Edge
96	802.11ax HE160	114	-	-	-	-	-	-	-	Harmonic
97	802.11a	149	5615.81	52.41	68.30	-15.89	H	PEAK	Pass	Band Edge
97	802.11a	149	17235.00	49.48	68.30	-18.82	V	Peak	Pass	Harmonic
98	802.11a	157	5617.58	52.32	68.30	-15.98	V	PEAK	Pass	Band Edge
98	802.11a	157	17355.00	48.76	68.30	-19.54	H	Peak	Pass	Harmonic
99	802.11a	165	5934.63	53.27	68.30	-15.03	H	PEAK	Pass	Band Edge
99	802.11a	165	17475.00	48.67	68.30	-19.63	V	Peak	Pass	Harmonic
100	802.11ac VHT20	149	5637.12	52.39	68.30	-15.91	V	PEAK	Pass	Band Edge
100	802.11ac VHT20	149	17235.00	47.45	68.30	-20.85	H	Peak	Pass	Harmonic
101	802.11ac VHT20	157	-	-	-	-	-	-	-	Band Edge
101	802.11ac VHT20	157	17355.00	49.41	68.30	-18.89	V	Peak	Pass	Harmonic
102	802.11ac VHT20	165	5925.75	52.42	68.30	-15.88	H	PEAK	Pass	Band Edge
102	802.11ac VHT20	165	17475.00	48.77	68.30	-19.53	H	Peak	Pass	Harmonic
103	802.11ac VHT40	151	5644.33	53.36	68.30	-14.94	H	PEAK	Pass	Band Edge
103	802.11ac VHT40	151	-	-	-	-	-	-	-	Harmonic
104	802.11ac VHT40	159	5945.35	52.89	68.30	-15.41	H	PEAK	Pass	Band Edge
104	802.11ac VHT40	159	-	-	-	-	-	-	-	Harmonic
105	802.11ac VHT80	155	5641.65	57.43	68.30	-10.87	H	PEAK	Pass	Band Edge
105	802.11ac VHT80	155	17325.00	46.92	68.30	-21.38	V	Peak	Pass	Harmonic
106	802.11ax HE20	149	5631.18	52.35	68.30	-15.95	V	PEAK	Pass	Band Edge
106	802.11ax HE20	149	17235.00	48.33	68.30	-19.97	H	Peak	Pass	Harmonic
107	802.11ax HE20	149	5642.20	52.26	68.30	-16.04	H	PEAK	Pass	Band Edge
107	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
108	802.11ax HE20	149	5632.92	53.05	68.30	-15.25	H	PEAK	Pass	Band Edge
108	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
109	802.11ax HE20	149	5614.79	52.26	68.30	-16.04	V	PEAK	Pass	Band Edge
109	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
110	802.11ax HE20	157	-	-	-	-	-	-	-	Band Edge
110	802.11ax HE20	157	17355.00	48.36	68.30	-19.94	V	Peak	Pass	Harmonic
111	802.11ax HE20	165	5935.75	52.07	68.30	-16.23	H	PEAK	Pass	Band Edge







111	802.11ax HE20	165	17475.00	48.89	68.30	-19.41	V	Peak	Pass	Harmonic
112	802.11ax HE20	165	5932.00	52.58	68.30	-15.72	H	PEAK	Pass	Band Edge
112	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
113	802.11ax HE20	165	5938.13	53.43	68.30	-14.87	H	PEAK	Pass	Band Edge
113	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
114	802.11ax HE20	165	5931.38	52.09	68.30	-16.21	H	PEAK	Pass	Band Edge
114	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
115	802.11ax HE40	151	5939.67	53.35	68.30	-14.95	H	PEAK	Pass	Band Edge
115	802.11ax HE40	151	17265.00	49.45	68.30	-18.85	H	Peak	Pass	Harmonic
116	802.11ax HE40	151	5943.76	52.69	68.30	-15.61	V	PEAK	Pass	Band Edge
116	802.11ax HE40	151	-	-	-	-	-	-	-	Harmonic
117	802.11ax HE40	159	5925.51	52.83	68.30	-15.47	V	PEAK	Pass	Band Edge
117	802.11ax HE40	159	17385.00	48.39	68.30	-19.91	H	Peak	Pass	Harmonic
118	802.11ax HE40	159	5928.30	52.76	68.30	-15.54	H	PEAK	Pass	Band Edge
118	802.11ax HE40	159	-	-	-	-	-	-	-	Harmonic
119	802.11ax HE80	155	5637.10	53.54	68.30	-14.76	H	PEAK	Pass	Band Edge
119	802.11ax HE80	155	17325.00	47.57	68.30	-20.73	V	Peak	Pass	Harmonic
120	802.11ax HE80	155	5643.93	54.42	68.30	-13.88	H	PEAK	Pass	Band Edge
120	802.11ax HE80	155	-	-	-	-	-	-	-	Harmonic
121	802.11ax HE80	155	5926.55	57.17	68.30	-11.13	V	PEAK	Pass	Band Edge
121	802.11ax HE80	155	-	-	-	-	-	-	-	Harmonic
122	802.11ax HE160	114	5457.80	44.63	54.00	-9.37	H	AVERAGE	Pass	Band Edge
122	802.11ax HE160	114	-	-	-	-	-	-	-	Harmonic
123	802.11ax HE80_LF	58	635.28	27.04	46.00	-18.96	H	Peak	Pass	LF
124	802.11ac VHT80_LF	155	543.13	25.95	46.00	-20.05	V	Peak	Pass	LF
125	802.11ax HE80	58	5373.30	49.60	54.00	-4.40	H	AVERAGE	Pass	Band Edge
125	802.11ax HE80	58	10580.00	48.13	68.30	-20.17	H	Peak	Pass	Harmonic
126	802.11ac VHT80	155	5928.83	53.58	68.30	-14.72	V	PEAK	Pass	Band Edge
126	802.11ac VHT80	155	17325.00	47.55	68.30	-20.75	V	Peak	Pass	Harmonic
127	802.11ax HE80	58	5371.77	50.31	54.00	-3.69	H	AVERAGE	Pass	Band Edge
127	802.11ax HE80	58	10580.00	48.63	68.30	-19.67	H	Peak	Pass	Harmonic
128	802.11ac VHT80	155	5629.23	52.98	68.30	-15.32	H	PEAK	Pass	Band Edge
128	802.11ac VHT80	155	17325.00	47.38	68.30	-20.92	H	Peak	Pass	Harmonic
129	802.11ax HE80	58	5374.66	49.43	54.00	-4.57	H	AVERAGE	Pass	Band Edge
129	802.11ax HE80	58	10580.00	48.35	68.30	-19.95	H	Peak	Pass	Harmonic
130	802.11ac VHT80	155	5645.50	54.80	68.30	-13.50	H	PEAK	Pass	Band Edge
130	802.11ac VHT80	155	17325.00	47.36	68.30	-20.94	H	Peak	Pass	Harmonic
131	802.11ax HE160	50	5372.01	49.41	54.00	-4.59	H	AVERAGE	Pass	Band Edge
131	802.11ax HE160	50	-	-	-	-	-	-	-	Harmonic
132	CO_TX	-	5375.00	49.65	54.00	-4.35	H	AVERAGE	Pass	Band Edge
132	CO_TX	-	10580.00	46.20	68.30	-22.10	V	Peak	Pass	Harmonic

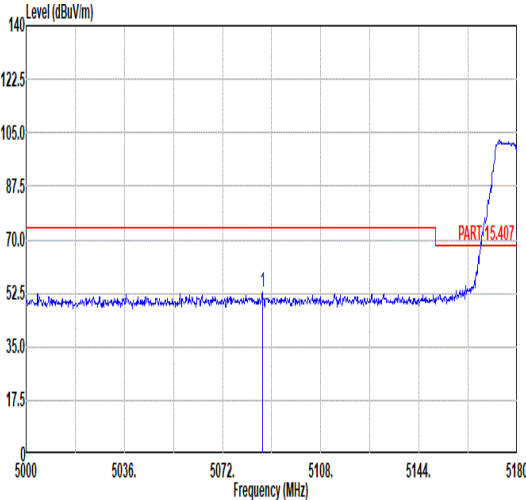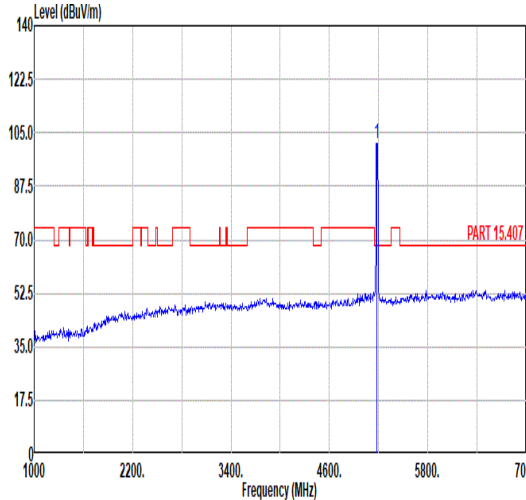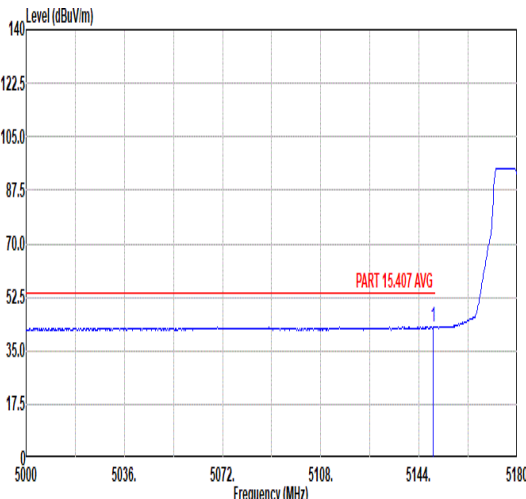
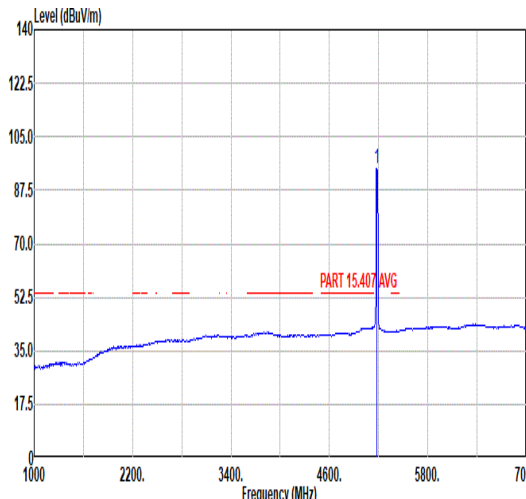


Mode	1																																																																																											
	Band Edge																																																																																											
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5086.58</td><td>52.73</td><td>74.00</td><td>-21.27</td><td>40.18</td><td>34.89</td><td>9.91</td><td>32.25</td><td>100</td><td>125</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5086.58	52.73	74.00	-21.27	40.18	34.89	9.91	32.25	100	125	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>101.66</td><td>-----</td><td>-----</td><td>88.93</td><td>34.98</td><td>9.97</td><td>32.22</td><td>100</td><td>125</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	101.66	-----	-----	88.93	34.98	9.97	32.22	100	125
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5086.58	52.73	74.00	-21.27	40.18	34.89	9.91	32.25	100	125	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5180.00	101.66	-----	-----	88.93	34.98	9.97	32.22	100	125	PEAK																																																																																	
Avg																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.22</td><td>42.93</td><td>54.00</td><td>-11.07</td><td>30.27</td><td>34.95</td><td>9.96</td><td>32.25</td><td>100</td><td>125</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.22	42.93	54.00	-11.07	30.27	34.95	9.96	32.25	100	125	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>94.75</td><td>-----</td><td>-----</td><td>82.02</td><td>34.98</td><td>9.97</td><td>32.22</td><td>100</td><td>125</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	94.75	-----	-----	82.02	34.98	9.97	32.22	100	125
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5149.22	42.93	54.00	-11.07	30.27	34.95	9.96	32.25	100	125	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5180.00	94.75	-----	-----	82.02	34.98	9.97	32.22	100	125	AVERAGE																																																																																	

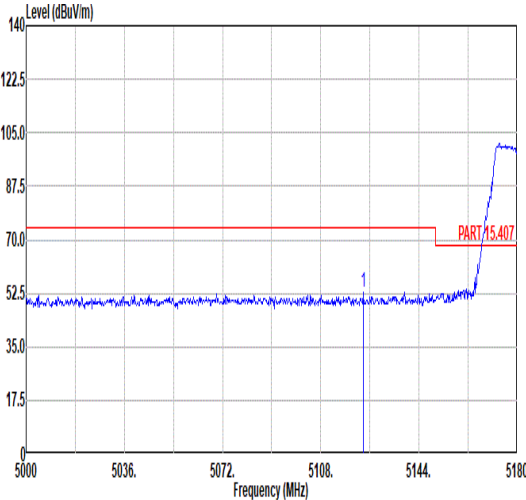
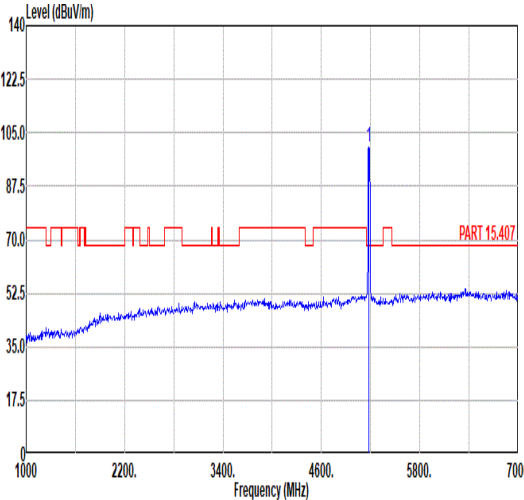
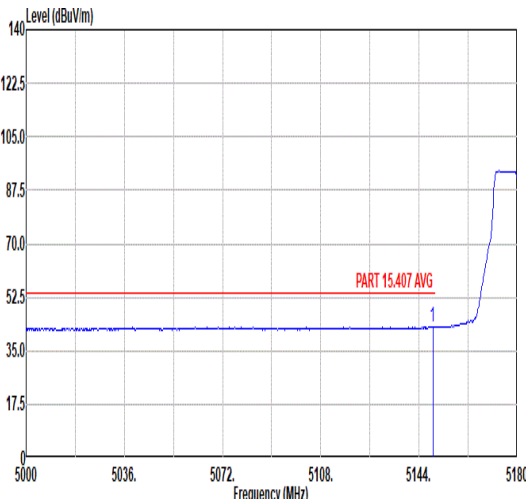
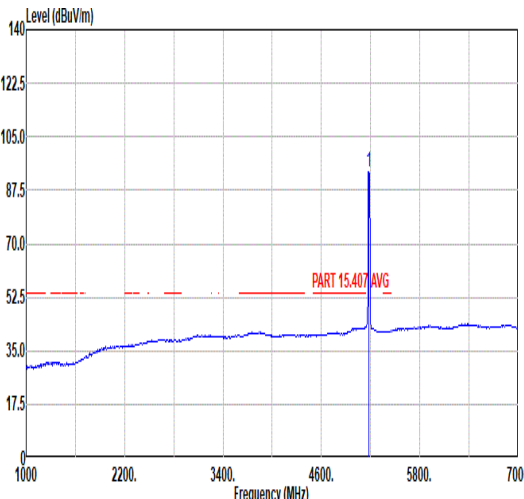


Mode	1																																																																																			
	Band Edge																																																																																			
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																			
ANT	1																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5123.48</td><td>53.06</td><td>74.00</td><td>-20.94</td><td>40.44</td><td>34.93</td><td>9.94</td><td>32.25</td><td>107</td><td>31</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5123.48	53.06	74.00	-20.94	40.44	34.93	9.94	32.25	107	31	PEAK	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>100.39</td><td>-----</td><td>-----</td><td>87.66</td><td>34.98</td><td>9.97</td><td>32.22</td><td>107</td><td>31</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	100.39	-----	-----	87.66	34.98	9.97	32.22	107	31	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5123.48	53.06	74.00	-20.94	40.44	34.93	9.94	32.25	107	31	PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5180.00	100.39	-----	-----	87.66	34.98	9.97	32.22	107	31	PEAK																																																																									
Avg	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.04</td><td>42.76</td><td>54.00</td><td>-11.24</td><td>30.10</td><td>34.95</td><td>9.96</td><td>32.25</td><td>107</td><td>31</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.04	42.76	54.00	-11.24	30.10	34.95	9.96	32.25	107	31	AVERAGE	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>93.72</td><td>-----</td><td>-----</td><td>80.99</td><td>34.98</td><td>9.97</td><td>32.22</td><td>107</td><td>31</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	93.72	-----	-----	80.99	34.98	9.97	32.22	107	31	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5149.04	42.76	54.00	-11.24	30.10	34.95	9.96	32.25	107	31	AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5180.00	93.72	-----	-----	80.99	34.98	9.97	32.22	107	31	AVERAGE																																																																									

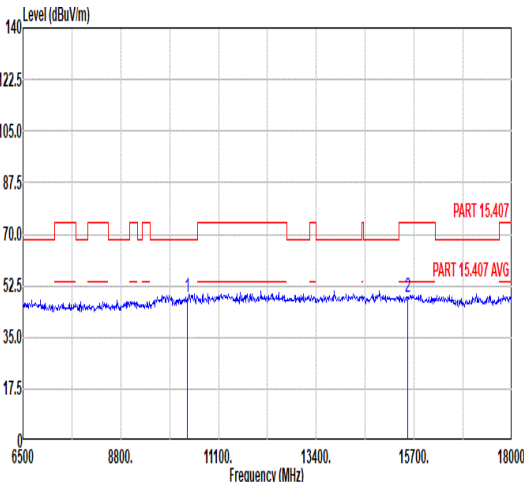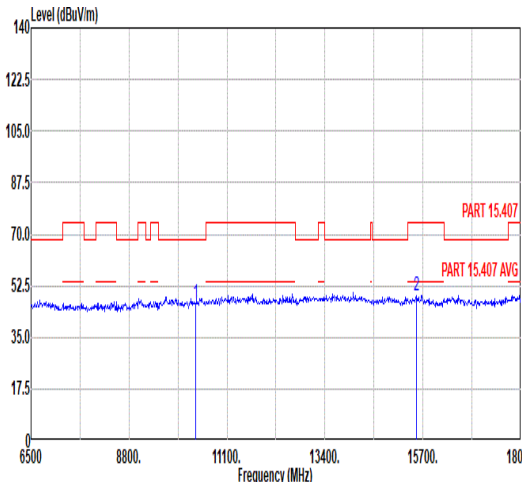

Mode	1																																																																																															
	Harmonic																																																																																															
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>10360.00</td><td>48.85</td><td>68.30</td><td>-19.45</td><td>58.00</td><td>37.22</td><td>13.25</td></tr><tr><td>2</td><td>15540.00</td><td>48.71</td><td>74.00</td><td>-25.29</td><td>50.52</td><td>40.22</td><td>15.86</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	10360.00	48.85	68.30	-19.45	58.00	37.22	13.25	2	15540.00	48.71	74.00	-25.29	50.52	40.22	15.86	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>10360.00</td><td>46.64</td><td>68.30</td><td>-21.66</td><td>55.79</td><td>37.22</td><td>13.25</td></tr><tr><td>2</td><td>15540.00</td><td>49.04</td><td>74.00</td><td>-24.96</td><td>50.85</td><td>40.22</td><td>15.86</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	10360.00	46.64	68.30	-21.66	55.79	37.22	13.25	2	15540.00	49.04	74.00	-24.96	50.85	40.22	15.86
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	10360.00	48.85	68.30	-19.45	58.00	37.22	13.25																																																																																									
2	15540.00	48.71	74.00	-25.29	50.52	40.22	15.86																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	10360.00	46.64	68.30	-21.66	55.79	37.22	13.25																																																																																									
2	15540.00	49.04	74.00	-24.96	50.85	40.22	15.86																																																																																									

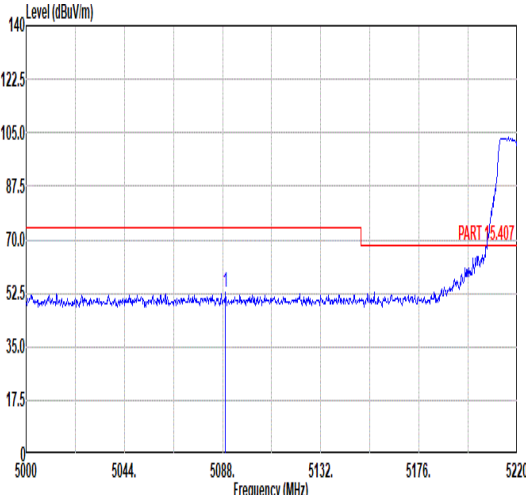
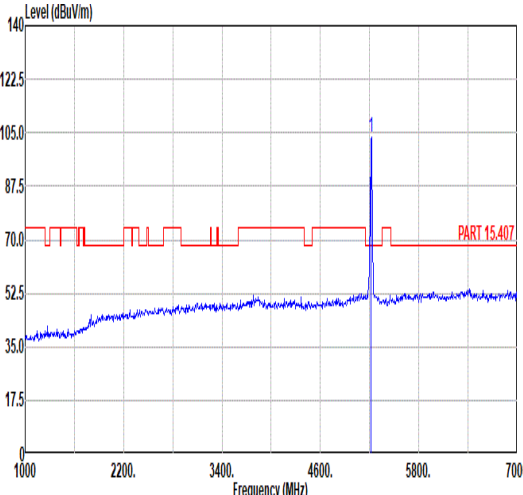
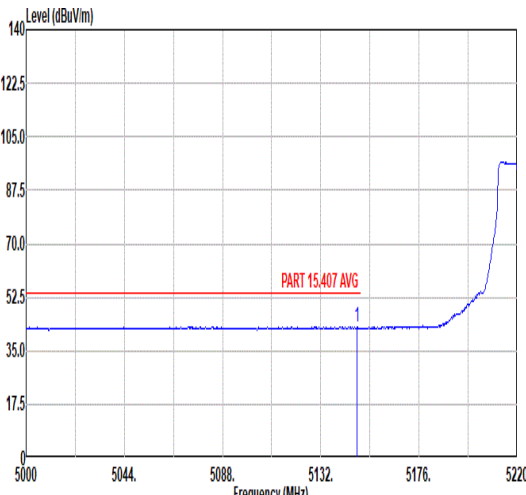
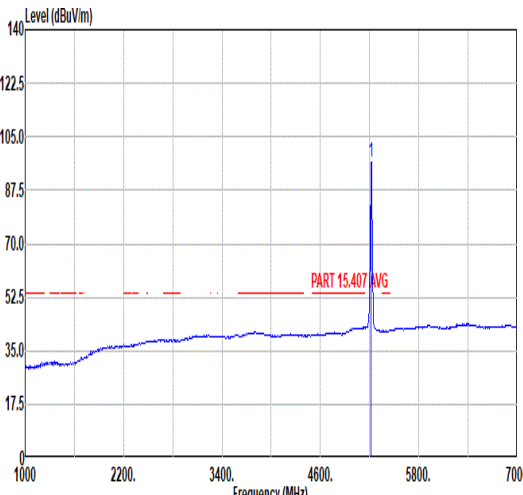


Mode	2																																																																																											
	Band Edge - L																																																																																											
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5089.32</td><td>52.93</td><td>74.00</td><td>-21.07</td><td>40.38</td><td>34.89</td><td>9.91</td><td>32.25</td><td>100</td><td>123</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5089.32	52.93	74.00	-21.07	40.38	34.89	9.91	32.25	100	123	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>103.41</td><td>-----</td><td>-----</td><td>90.53</td><td>35.05</td><td>10.03</td><td>32.20</td><td>100</td><td>123</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	103.41	-----	-----	90.53	35.05	10.03	32.20	100	123
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5089.32	52.93	74.00	-21.07	40.38	34.89	9.91	32.25	100	123	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5220.00	103.41	-----	-----	90.53	35.05	10.03	32.20	100	123	PEAK																																																																																	
Avg																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.28</td><td>42.96</td><td>54.00</td><td>-11.04</td><td>30.30</td><td>34.95</td><td>9.96</td><td>32.25</td><td>100</td><td>123</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.28	42.96	54.00	-11.04	30.30	34.95	9.96	32.25	100	123	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>96.61</td><td>-----</td><td>-----</td><td>83.77</td><td>35.03</td><td>10.01</td><td>32.20</td><td>100</td><td>123</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	96.61	-----	-----	83.77	35.03	10.01	32.20	100	123
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5148.28	42.96	54.00	-11.04	30.30	34.95	9.96	32.25	100	123	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5220.00	96.61	-----	-----	83.77	35.03	10.01	32.20	100	123	AVERAGE																																																																																	



Mode	2																																																	
	Band Edge - R																																																	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																	
ANT	1																																																	
Pol.	Horizontal					Fundamental																																												
Peak	<table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5451.60</td><td>50.99</td><td>74.00</td><td>-23.01</td><td>37.76</td><td>35.20</td><td>10.29</td><td>32.26</td><td>100</td><td>123</td><td>PEAK</td></tr></table>					Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5451.60	50.99	74.00	-23.01	37.76	35.20	10.29	32.26	100	123	PEAK	Blank				
Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1 5451.60	50.99	74.00	-23.01	37.76	35.20	10.29	32.26	100	123	PEAK																																								
Avg	<table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5450.40</td><td>42.09</td><td>54.00</td><td>-11.91</td><td>28.85</td><td>35.20</td><td>10.29</td><td>32.25</td><td>100</td><td>123</td><td>AVERAGE</td></tr></table>					Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5450.40	42.09	54.00	-11.91	28.85	35.20	10.29	32.25	100	123	AVERAGE	Blank				
Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1 5450.40	42.09	54.00	-11.91	28.85	35.20	10.29	32.25	100	123	AVERAGE																																								

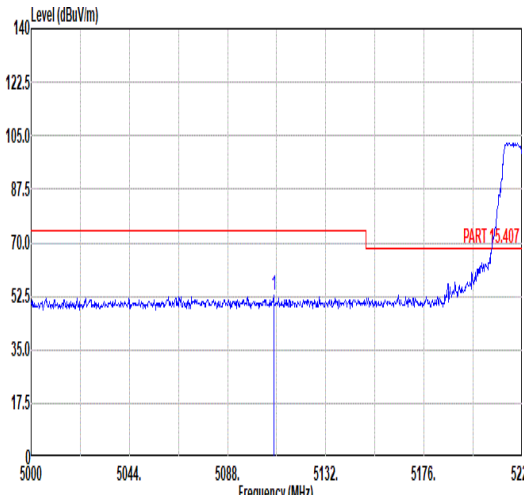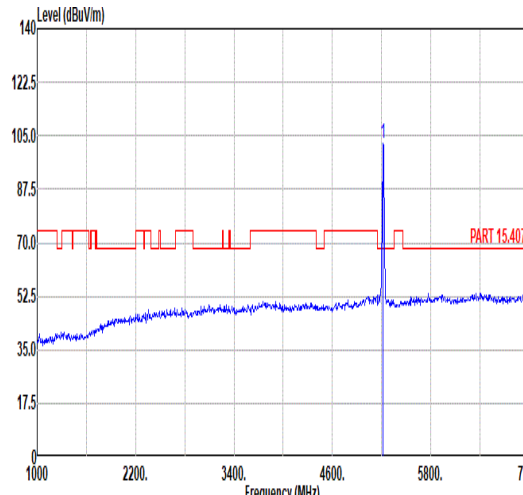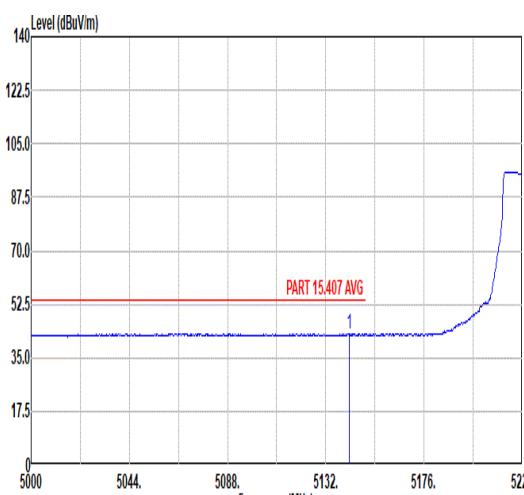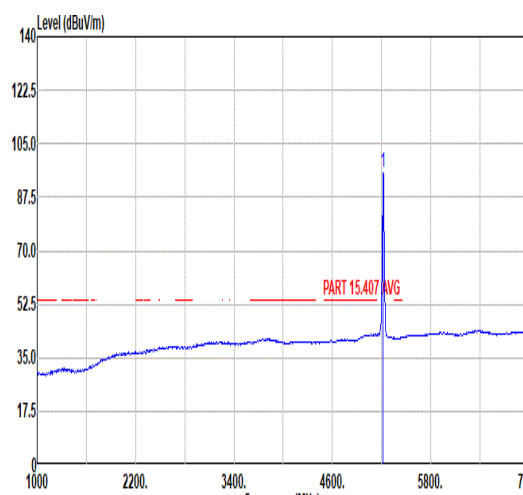


Mode	2																																																																																												
	Band Edge - L																																																																																												
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																												
ANT	1																																																																																												
Pol.	Vertical						Fundamental																																																																																						
Peak																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5108.68</td><td>53.05</td><td>74.00</td><td>-20.95</td><td>40.46</td><td>34.91</td><td>9.93</td><td>32.25</td><td>100</td><td>31</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5108.68	53.05	74.00	-20.95	40.46	34.91	9.93	32.25	100	31	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>102.40</td><td>-----</td><td>-----</td><td>89.54</td><td>35.04</td><td>10.02</td><td>32.20</td><td>100</td><td>31</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	102.40	-----	-----	89.54	35.04	10.02	32.20	100	31
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5108.68	53.05	74.00	-20.95	40.46	34.91	9.93	32.25	100	31	PEAK																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5220.00	102.40	-----	-----	89.54	35.04	10.02	32.20	100	31	PEAK																																																																																		
Avg																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5142.56</td><td>42.91</td><td>54.00</td><td>-11.09</td><td>30.27</td><td>34.94</td><td>9.95</td><td>32.25</td><td>100</td><td>31</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5142.56	42.91	54.00	-11.09	30.27	34.94	9.95	32.25	100	31	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>95.74</td><td>-----</td><td>-----</td><td>82.90</td><td>35.03</td><td>10.01</td><td>32.20</td><td>100</td><td>31</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	95.74	-----	-----	82.90	35.03	10.01	32.20	100	31
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5142.56	42.91	54.00	-11.09	30.27	34.94	9.95	32.25	100	31	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5220.00	95.74	-----	-----	82.90	35.03	10.01	32.20	100	31	AVERAGE																																																																																		







Mode	2																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																		
ANT	1																																																		
Pol.	Vertical										Fundamental																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5412.72</td><td>51.65</td><td>74.00</td><td>-22.35</td><td>38.36</td><td>35.20</td><td>10.29</td><td>32.20</td><td>100</td><td>31</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5412.72	51.65	74.00	-22.35	38.36	35.20	10.29	32.20	100	31	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5412.72	51.65	74.00	-22.35	38.36	35.20	10.29	32.20	100	31	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5455.92</td><td>41.97</td><td>54.00</td><td>-12.03</td><td>28.73</td><td>35.20</td><td>10.30</td><td>32.26</td><td>100</td><td>31</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5455.92	41.97	54.00	-12.03	28.73	35.20	10.30	32.26	100	31	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5455.92	41.97	54.00	-12.03	28.73	35.20	10.30	32.26	100	31	AVERAGE																																								


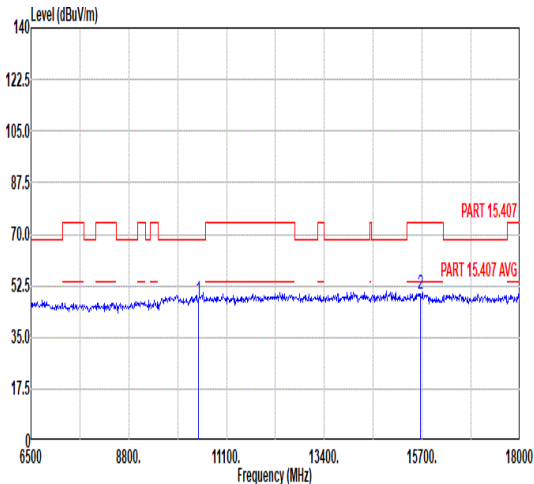


Mode	2																																																	
	Harmonic																																																	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																	
ANT	1																																																	
Pol.	Horizontal					Vertical																																												
Peak Avg																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>10440.00</td><td>47.47</td><td>68.30</td><td>-20.83</td><td>56.57</td><td>37.26</td><td>13.30</td></tr><tr><td>2</td><td>15660.00</td><td>49.73</td><td>74.00</td><td>-24.27</td><td>51.73</td><td>40.30</td><td>15.85</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	10440.00	47.47	68.30	-20.83	56.57	37.26	13.30	2	15660.00	49.73	74.00	-24.27	51.73	40.30	15.85
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																											
1	10440.00	47.47	68.30	-20.83	56.57	37.26	13.30																																											
2	15660.00	49.73	74.00	-24.27	51.73	40.30	15.85																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>10440.00</td><td>47.47</td><td>68.30</td><td>-20.83</td><td>56.57</td><td>37.26</td><td>13.30</td></tr><tr><td>2</td><td>15660.00</td><td>49.73</td><td>74.00</td><td>-24.27</td><td>51.73</td><td>40.30</td><td>15.85</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	10440.00	47.47	68.30	-20.83	56.57	37.26	13.30	2	15660.00	49.73	74.00	-24.27	51.73	40.30	15.85
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																											
1	10440.00	47.47	68.30	-20.83	56.57	37.26	13.30																																											
2	15660.00	49.73	74.00	-24.27	51.73	40.30	15.85																																											

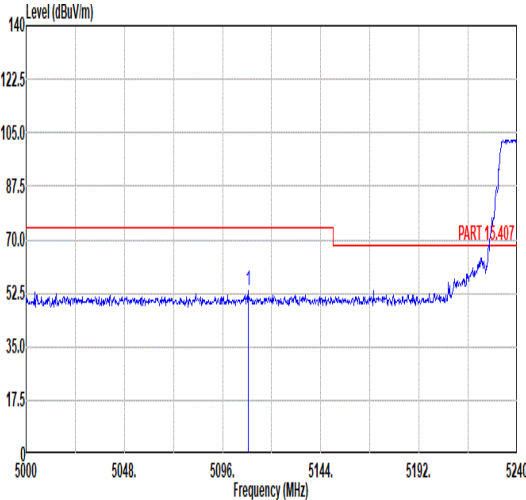
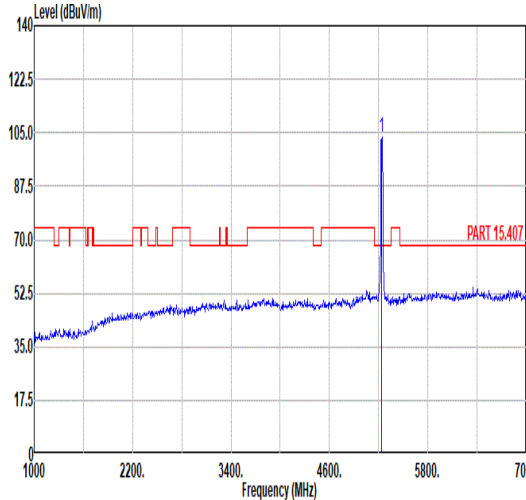
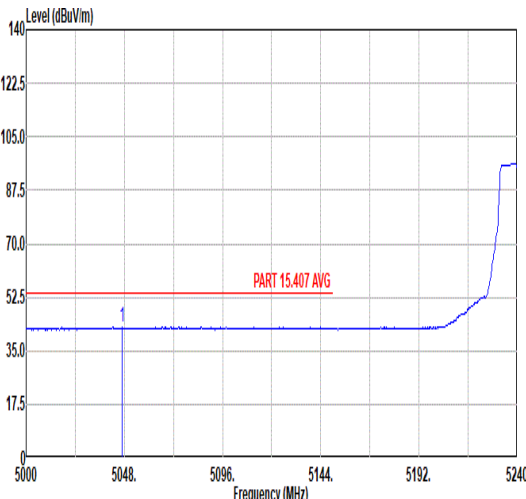
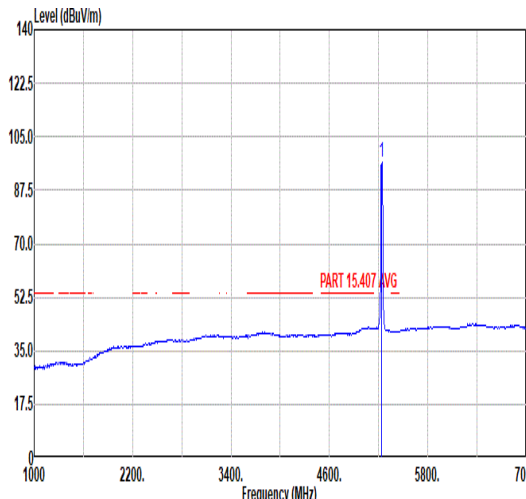


Mode	3																																																																																			
	Band Edge - L																																																																																			
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																			
ANT	1																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5108.48</td><td>53.44</td><td>74.00</td><td>-20.56</td><td>40.85</td><td>34.91</td><td>9.93</td><td>32.25</td><td>103</td><td>124</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5108.48	53.44	74.00	-20.56	40.85	34.91	9.93	32.25	103	124	PEAK	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>103.72</td><td>-----</td><td>-----</td><td>90.79</td><td>35.08</td><td>10.05</td><td>32.20</td><td>103</td><td>124</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	103.72	-----	-----	90.79	35.08	10.05	32.20	103	124	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5108.48	53.44	74.00	-20.56	40.85	34.91	9.93	32.25	103	124	PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5240.00	103.72	-----	-----	90.79	35.08	10.05	32.20	103	124	PEAK																																																																									
Avg	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5046.80</td><td>42.78</td><td>54.00</td><td>-11.22</td><td>30.30</td><td>34.85</td><td>9.89</td><td>32.26</td><td>103</td><td>124</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5046.80	42.78	54.00	-11.22	30.30	34.85	9.89	32.26	103	124	AVERAGE	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>96.79</td><td>-----</td><td>-----</td><td>83.83</td><td>35.10</td><td>10.06</td><td>32.20</td><td>103</td><td>124</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	96.79	-----	-----	83.83	35.10	10.06	32.20	103	124	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5046.80	42.78	54.00	-11.22	30.30	34.85	9.89	32.26	103	124	AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5240.00	96.79	-----	-----	83.83	35.10	10.06	32.20	103	124	AVERAGE																																																																									

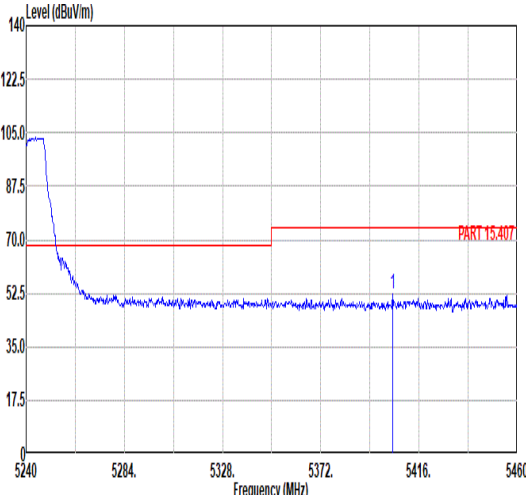
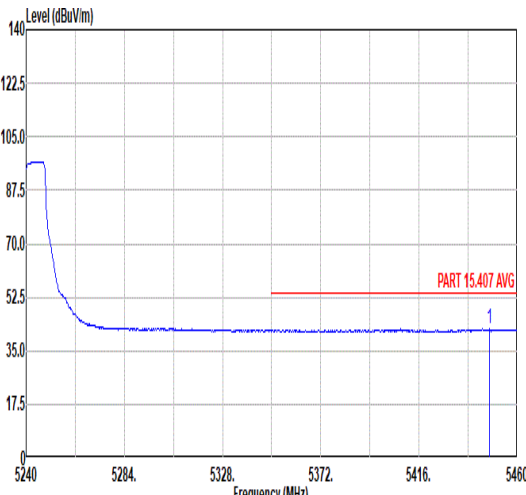


Mode	3																																																			
	Band Edge - R																																																			
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																			
ANT	1																																																			
Pol.	Horizontal						Fundamental																																													
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5404.34</td><td>52.21</td><td>74.00</td><td>-21.79</td><td>38.90</td><td>35.20</td><td>10.29</td><td>32.18</td><td>103</td><td>124</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5404.34	52.21	74.00	-21.79	38.90	35.20	10.29	32.18	103	124	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																											
1	5404.34	52.21	74.00	-21.79	38.90	35.20	10.29	32.18	103	124	PEAK																																									
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5447.68</td><td>42.03</td><td>54.00</td><td>-11.97</td><td>28.79</td><td>35.20</td><td>10.29</td><td>32.25</td><td>103</td><td>124</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5447.68	42.03	54.00	-11.97	28.79	35.20	10.29	32.25	103	124	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																											
1	5447.68	42.03	54.00	-11.97	28.79	35.20	10.29	32.25	103	124	AVERAGE																																									

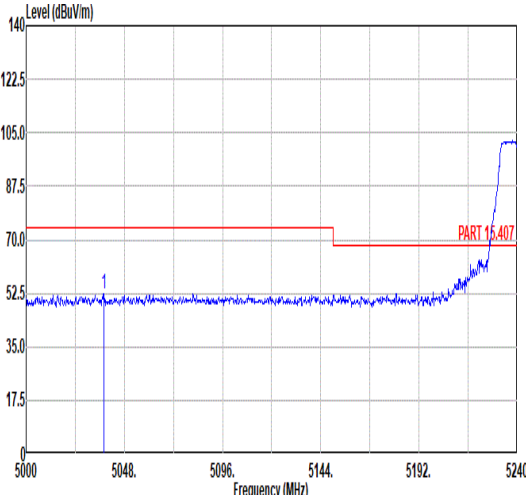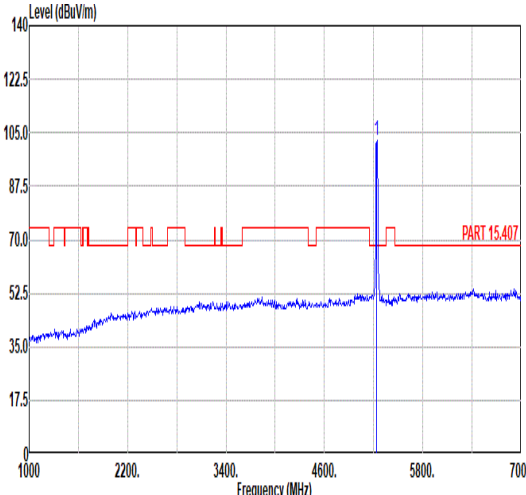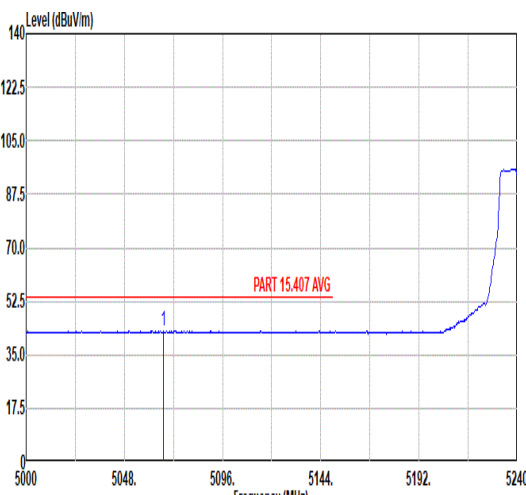
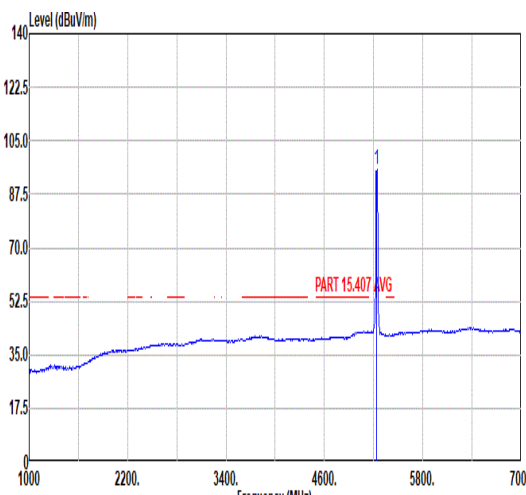


Mode	3																																																																																											
	Band Edge - L																																																																																											
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																											
ANT	1																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5037.92</td><td>52.45</td><td>74.00</td><td>-21.55</td><td>39.99</td><td>34.84</td><td>9.88</td><td>32.26</td><td>101</td><td>32</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5037.92	52.45	74.00	-21.55	39.99	34.84	9.88	32.26	101	32	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>102.29</td><td>-----</td><td>-----</td><td>89.36</td><td>35.08</td><td>10.05</td><td>32.20</td><td>101</td><td>32</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	102.29	-----	-----	89.36	35.08	10.05	32.20	101	32
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5037.92	52.45	74.00	-21.55	39.99	34.84	9.88	32.26	101	32	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5240.00	102.29	-----	-----	89.36	35.08	10.05	32.20	101	32	PEAK																																																																																	
Avg																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5067.20</td><td>42.87</td><td>54.00</td><td>-11.13</td><td>30.36</td><td>34.87</td><td>9.90</td><td>32.26</td><td>101</td><td>32</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5067.20	42.87	54.00	-11.13	30.36	34.87	9.90	32.26	101	32	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>95.53</td><td>-----</td><td>-----</td><td>82.60</td><td>35.08</td><td>10.05</td><td>32.20</td><td>101</td><td>32</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	95.53	-----	-----	82.60	35.08	10.05	32.20	101	32
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5067.20	42.87	54.00	-11.13	30.36	34.87	9.90	32.26	101	32	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5240.00	95.53	-----	-----	82.60	35.08	10.05	32.20	101	32	AVERAGE																																																																																	



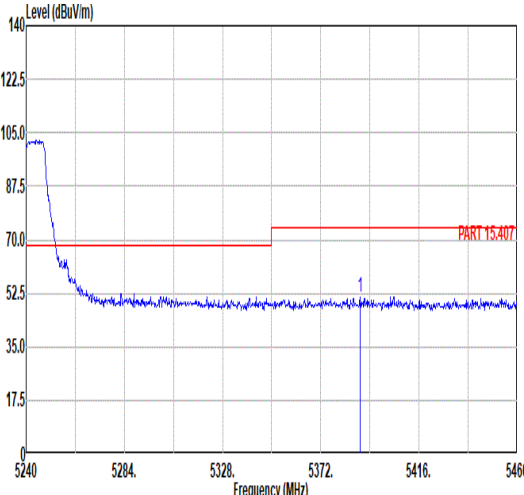
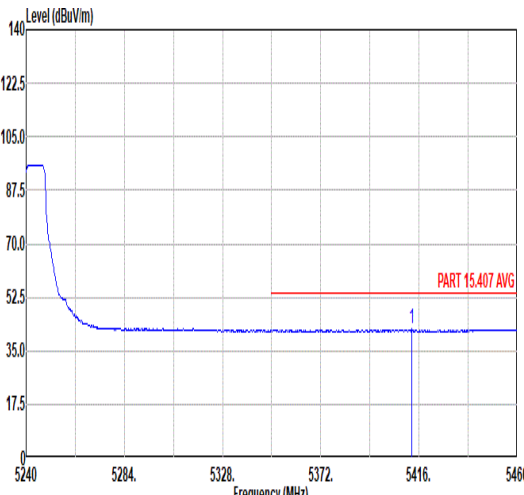


Mode	3																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																		
ANT	1																																																		
Pol.	Vertical						Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5389.60</td><td>51.20</td><td>74.00</td><td>-22.80</td><td>37.91</td><td>35.20</td><td>10.27</td><td>32.18</td><td>101</td><td>32</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5389.60	51.20	74.00	-22.80	37.91	35.20	10.27	32.18	101	32	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5389.60	51.20	74.00	-22.80	37.91	35.20	10.27	32.18	101	32	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5412.70</td><td>42.08</td><td>54.00</td><td>-11.92</td><td>28.79</td><td>35.20</td><td>10.29</td><td>32.20</td><td>101</td><td>32</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5412.70	42.08	54.00	-11.92	28.79	35.20	10.29	32.20	101	32	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5412.70	42.08	54.00	-11.92	28.79	35.20	10.29	32.20	101	32	AVERAGE																																								



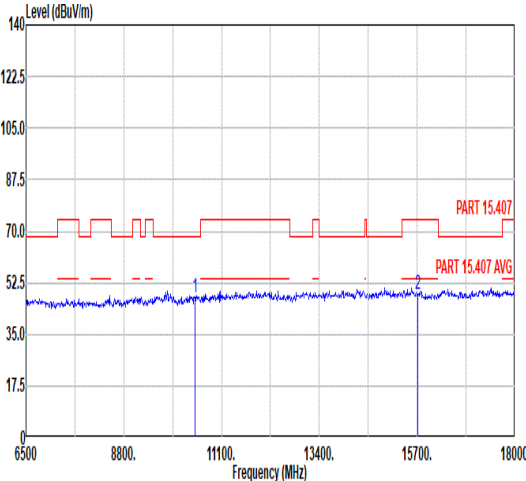
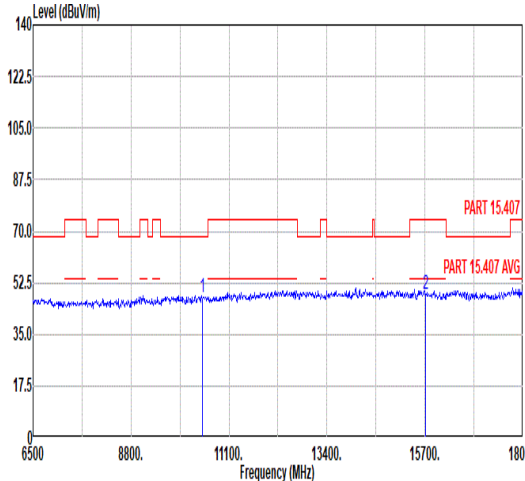


Mode	3																																																																																															
	Harmonic																																																																																															
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>10480.00</td><td>47.59</td><td>68.30</td><td>-20.71</td><td>56.63</td><td>37.29</td><td>13.36</td></tr><tr><td>2</td><td>15720.00</td><td>48.69</td><td>74.00</td><td>-25.31</td><td>50.77</td><td>40.33</td><td>15.87</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	10480.00	47.59	68.30	-20.71	56.63	37.29	13.36	2	15720.00	48.69	74.00	-25.31	50.77	40.33	15.87	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>10480.00</td><td>47.69</td><td>68.30</td><td>-20.61</td><td>56.73</td><td>37.29</td><td>13.36</td></tr><tr><td>2</td><td>15720.00</td><td>48.86</td><td>74.00</td><td>-25.14</td><td>50.94</td><td>40.33</td><td>15.87</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	10480.00	47.69	68.30	-20.61	56.73	37.29	13.36	2	15720.00	48.86	74.00	-25.14	50.94	40.33	15.87
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	10480.00	47.59	68.30	-20.71	56.63	37.29	13.36																																																																																									
2	15720.00	48.69	74.00	-25.31	50.77	40.33	15.87																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	10480.00	47.69	68.30	-20.61	56.73	37.29	13.36																																																																																									
2	15720.00	48.86	74.00	-25.14	50.94	40.33	15.87																																																																																									

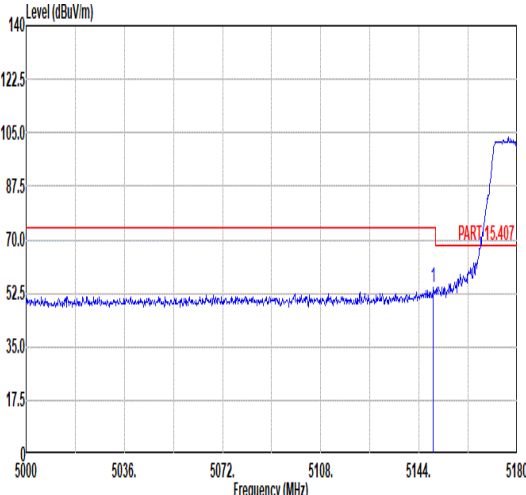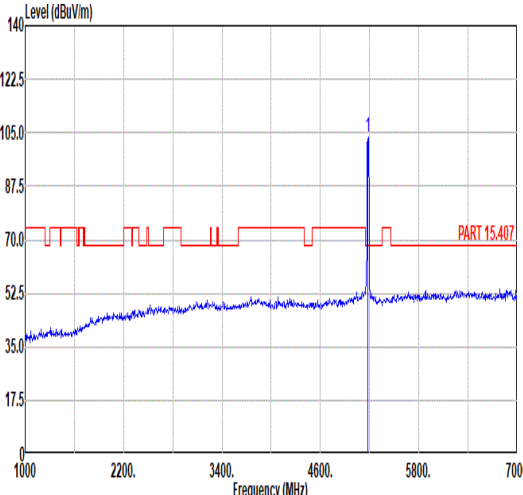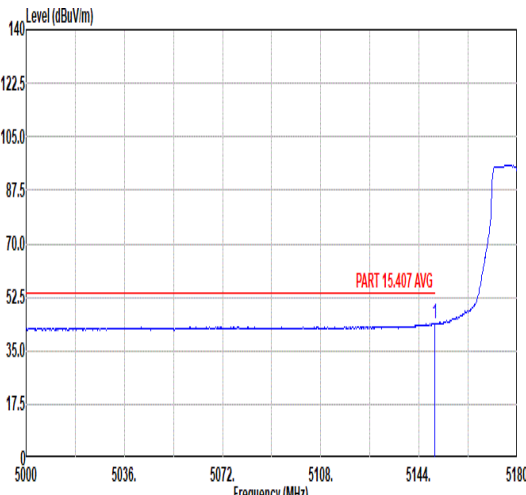
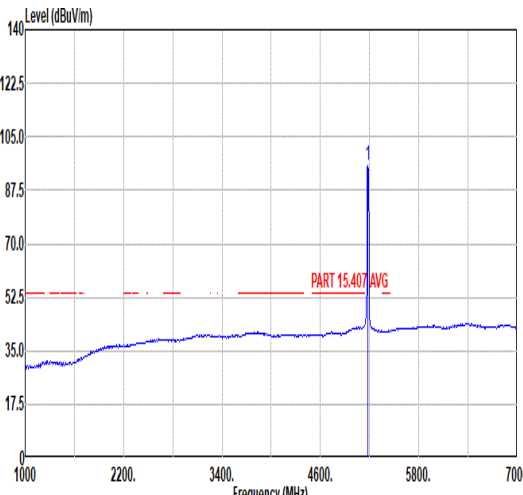


Mode	4																																																																																											
	Band Edge																																																																																											
	U-NII-1_5.15-5.25_802.11ac VHT20_CH36_5180MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal											Fundamental																																																																																
Peak																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.22</td><td>54.34</td><td>74.00</td><td>-19.66</td><td>41.68</td><td>34.95</td><td>9.96</td><td>32.25</td><td>104</td><td>124</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.22	54.34	74.00	-19.66	41.68	34.95	9.96	32.25	104	124	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>103.41</td><td>-----</td><td>-----</td><td>90.65</td><td>34.99</td><td>9.98</td><td>32.21</td><td>104</td><td>124</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	103.41	-----	-----	90.65	34.99	9.98	32.21	104	124
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5149.22	54.34	74.00	-19.66	41.68	34.95	9.96	32.25	104	124	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5180.00	103.41	-----	-----	90.65	34.99	9.98	32.21	104	124	PEAK																																																																																	
Avg																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.76</td><td>43.92</td><td>54.00</td><td>-10.08</td><td>31.26</td><td>34.95</td><td>9.96</td><td>32.25</td><td>104</td><td>124</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.76	43.92	54.00	-10.08	31.26	34.95	9.96	32.25	104	124	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>95.44</td><td>-----</td><td>-----</td><td>82.71</td><td>34.98</td><td>9.97</td><td>32.22</td><td>104</td><td>124</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	95.44	-----	-----	82.71	34.98	9.97	32.22	104	124
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5149.76	43.92	54.00	-10.08	31.26	34.95	9.96	32.25	104	124	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5180.00	95.44	-----	-----	82.71	34.98	9.97	32.22	104	124	AVERAGE																																																																																	

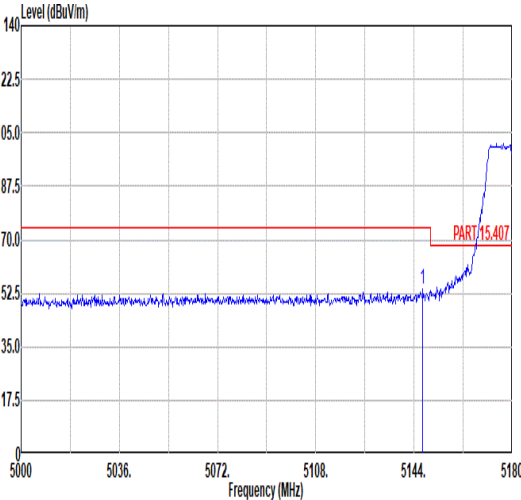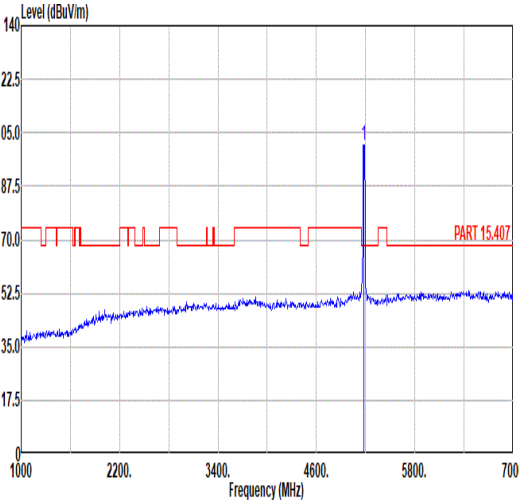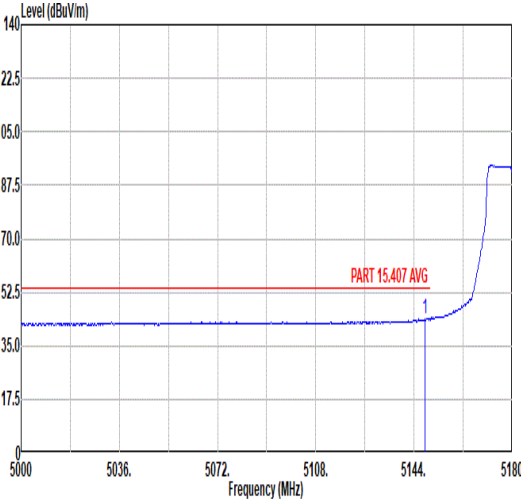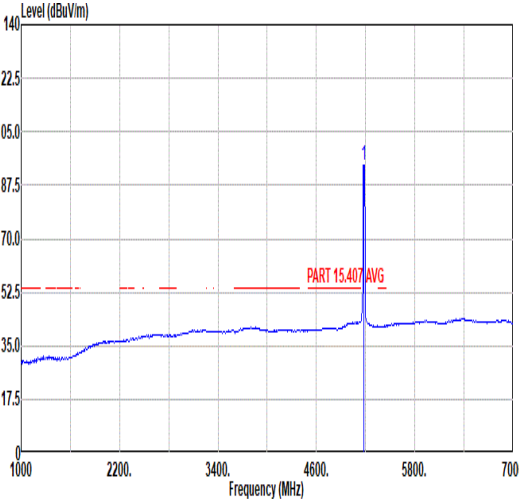

Mode	4																																																																																											
	Band Edge																																																																																											
	U-NII-1_5.15-5.25_802.11ac VHT20_CH36_5180MHz																																																																																											
ANT	1																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5147.24</td><td>54.00</td><td>74.00</td><td>-20.00</td><td>41.35</td><td>34.95</td><td>9.95</td><td>32.25</td><td>100</td><td>31</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.24	54.00	74.00	-20.00	41.35	34.95	9.95	32.25	100	31	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>101.11</td><td>-----</td><td>-----</td><td>88.35</td><td>34.99</td><td>9.98</td><td>32.21</td><td>100</td><td>31</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	101.11	-----	-----	88.35	34.99	9.98	32.21	100	31
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5147.24	54.00	74.00	-20.00	41.35	34.95	9.95	32.25	100	31	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5180.00	101.11	-----	-----	88.35	34.99	9.98	32.21	100	31	PEAK																																																																																	
Avg																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5148.14</td><td>43.72</td><td>54.00</td><td>-10.28</td><td>31.06</td><td>34.95</td><td>9.96</td><td>32.25</td><td>100</td><td>31</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.14	43.72	54.00	-10.28	31.06	34.95	9.96	32.25	100	31	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>94.21</td><td>-----</td><td>-----</td><td>81.45</td><td>34.99</td><td>9.98</td><td>32.21</td><td>100</td><td>31</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	94.21	-----	-----	81.45	34.99	9.98	32.21	100	31
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5148.14	43.72	54.00	-10.28	31.06	34.95	9.96	32.25	100	31	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5180.00	94.21	-----	-----	81.45	34.99	9.98	32.21	100	31	AVERAGE																																																																																	



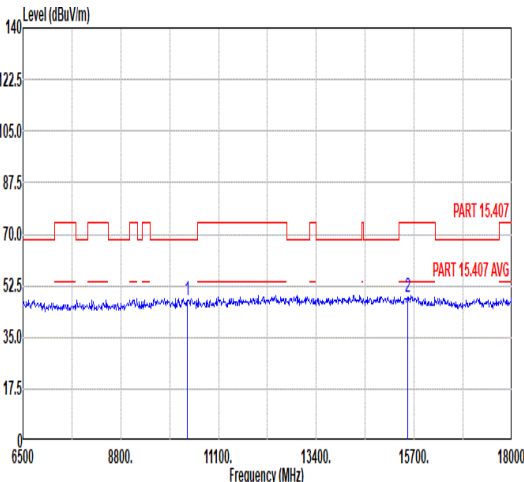
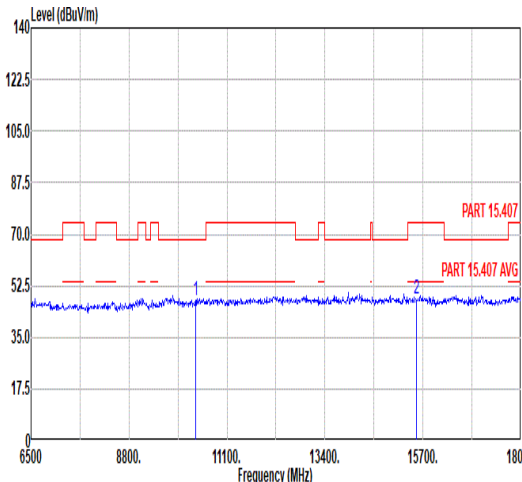


Mode	4																																																																																																									
	Harmonic																																																																																																									
	U-NII-1_5.15-5.25_802.11ac VHT20_CH36_5180MHz																																																																																																									
ANT	1																																																																																																									
Pol.	Horizontal								Vertical																																																																																																	
Peak Avg																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td></tr><tr><td>1 10360.00</td><td>47.51</td><td>68.30</td><td>-20.79</td><td>56.66</td><td>37.22</td><td>13.25</td><td>59.62</td><td>-- -- Peak</td></tr><tr><td>2 15540.00</td><td>48.64</td><td>74.00</td><td>-25.36</td><td>50.45</td><td>40.22</td><td>15.86</td><td>57.89</td><td>-- -- Peak</td></tr></tbody></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 10360.00	47.51	68.30	-20.79	56.66	37.22	13.25	59.62	-- -- Peak	2 15540.00	48.64	74.00	-25.36	50.45	40.22	15.86	57.89	-- -- Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td></tr><tr><td>1 10360.00</td><td>47.74</td><td>68.30</td><td>-20.56</td><td>56.89</td><td>37.22</td><td>13.25</td><td>59.62</td><td>-- -- Peak</td></tr><tr><td>2 15540.00</td><td>48.10</td><td>74.00</td><td>-25.90</td><td>49.91</td><td>40.22</td><td>15.86</td><td>57.89</td><td>-- -- Peak</td></tr></tbody></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 10360.00	47.74	68.30	-20.56	56.89	37.22	13.25	59.62	-- -- Peak	2 15540.00	48.10	74.00	-25.90	49.91	40.22	15.86	57.89	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																		
1 10360.00	47.51	68.30	-20.79	56.66	37.22	13.25	59.62	-- -- Peak																																																																																																		
2 15540.00	48.64	74.00	-25.36	50.45	40.22	15.86	57.89	-- -- Peak																																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																		
1 10360.00	47.74	68.30	-20.56	56.89	37.22	13.25	59.62	-- -- Peak																																																																																																		
2 15540.00	48.10	74.00	-25.90	49.91	40.22	15.86	57.89	-- -- Peak																																																																																																		



Mode	5																																																																																															
	Harmonic																																																																																															
	U-NII-1_5.15-5.25_802.11ac VHT20_CH44_5220MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>10440.00</td><td>47.80</td><td>68.30</td><td>-20.50</td><td>56.90</td><td>37.26</td><td>13.30</td></tr><tr><td>2</td><td>15660.00</td><td>48.34</td><td>74.00</td><td>-25.66</td><td>50.34</td><td>40.30</td><td>15.85</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	10440.00	47.80	68.30	-20.50	56.90	37.26	13.30	2	15660.00	48.34	74.00	-25.66	50.34	40.30	15.85	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>10440.00</td><td>47.43</td><td>68.30</td><td>-20.87</td><td>56.53</td><td>37.26</td><td>13.30</td></tr><tr><td>2</td><td>15660.00</td><td>48.65</td><td>74.00</td><td>-25.35</td><td>50.65</td><td>40.30</td><td>15.85</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	10440.00	47.43	68.30	-20.87	56.53	37.26	13.30	2	15660.00	48.65	74.00	-25.35	50.65	40.30	15.85
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	10440.00	47.80	68.30	-20.50	56.90	37.26	13.30																																																																																									
2	15660.00	48.34	74.00	-25.66	50.34	40.30	15.85																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	10440.00	47.43	68.30	-20.87	56.53	37.26	13.30																																																																																									
2	15660.00	48.65	74.00	-25.35	50.65	40.30	15.85																																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>10440.00</td><td>47.80</td><td>68.30</td><td>-20.50</td><td>56.90</td><td>37.26</td><td>13.30</td></tr><tr><td>2</td><td>15660.00</td><td>48.34</td><td>74.00</td><td>-25.66</td><td>50.34</td><td>40.30</td><td>15.85</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	10440.00	47.80	68.30	-20.50	56.90	37.26	13.30	2	15660.00	48.34	74.00	-25.66	50.34	40.30	15.85	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>10440.00</td><td>47.43</td><td>68.30</td><td>-20.87</td><td>56.53</td><td>37.26</td><td>13.30</td></tr><tr><td>2</td><td>15660.00</td><td>48.65</td><td>74.00</td><td>-25.35</td><td>50.65</td><td>40.30</td><td>15.85</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	10440.00	47.43	68.30	-20.87	56.53	37.26	13.30	2	15660.00	48.65	74.00	-25.35	50.65	40.30	15.85	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	10440.00	47.80	68.30	-20.50	56.90	37.26	13.30																																																																																									
2	15660.00	48.34	74.00	-25.66	50.34	40.30	15.85																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	10440.00	47.43	68.30	-20.87	56.53	37.26	13.30																																																																																									
2	15660.00	48.65	74.00	-25.35	50.65	40.30	15.85																																																																																									

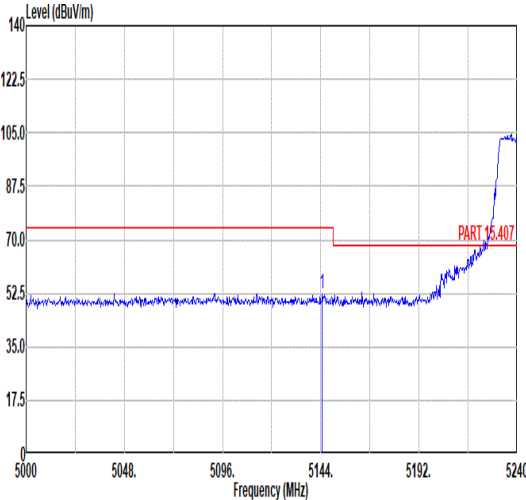
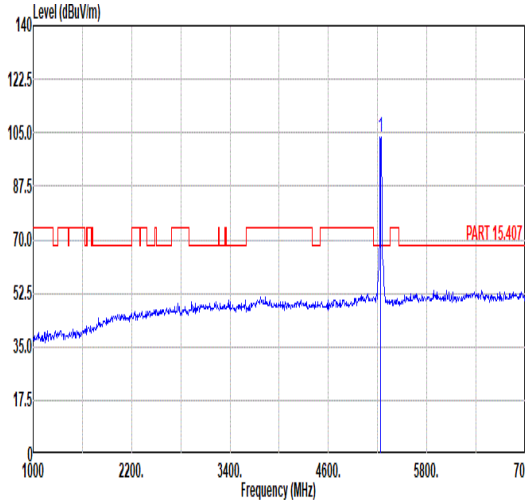
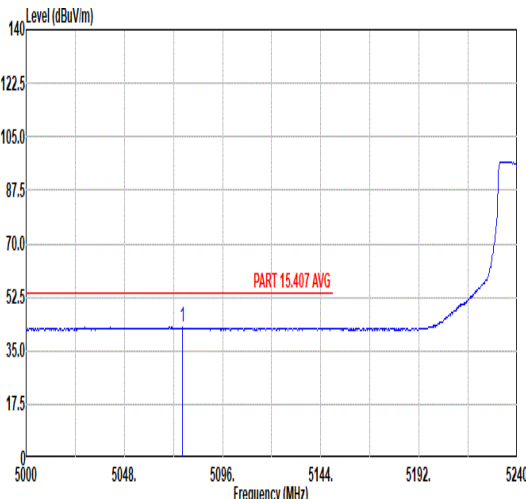
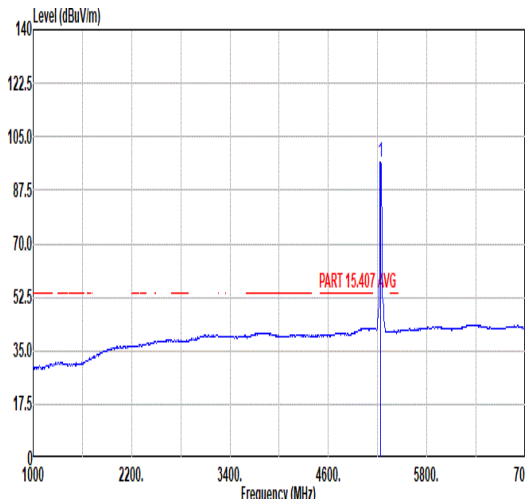


Mode	6																																																																																			
	Band Edge - L																																																																																			
	U-NII-1_5.15-5.25_802.11ac VHT20_CH48_5240MHz																																																																																			
ANT	1																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5144.72</td><td>52.41</td><td>74.00</td><td>-21.59</td><td>39.76</td><td>34.95</td><td>9.95</td><td>32.25</td><td>267</td><td>128</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5144.72	52.41	74.00	-21.59	39.76	34.95	9.95	32.25	267	128	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>103.75</td><td>-----</td><td>-----</td><td>90.82</td><td>35.08</td><td>10.05</td><td>32.20</td><td>267</td><td>128</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	103.75	-----	-----	90.82	35.08	10.05	32.20	267	128	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5144.72	52.41	74.00	-21.59	39.76	34.95	9.95	32.25	267	128	PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5240.00	103.75	-----	-----	90.82	35.08	10.05	32.20	267	128	PEAK																																																																									
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5076.56</td><td>42.69</td><td>54.00</td><td>-11.31</td><td>30.15</td><td>34.88</td><td>9.91</td><td>32.25</td><td>267</td><td>128</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5076.56	42.69	54.00	-11.31	30.15	34.88	9.91	32.25	267	128	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>96.54</td><td>-----</td><td>-----</td><td>83.63</td><td>35.07</td><td>10.04</td><td>32.20</td><td>267</td><td>128</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	96.54	-----	-----	83.63	35.07	10.04	32.20	267	128	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5076.56	42.69	54.00	-11.31	30.15	34.88	9.91	32.25	267	128	AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5240.00	96.54	-----	-----	83.63	35.07	10.04	32.20	267	128	AVERAGE																																																																									





Mode	6																																																			
	Band Edge - R																																																			
	U-NII-1_5.15-5.25_802.11ac VHT20_CH48_5240MHz																																																			
ANT	1																																																			
Pol.	Horizontal						Fundamental																																													
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.22</td><td>50.76</td><td>74.00</td><td>-23.24</td><td>37.52</td><td>35.20</td><td>10.21</td><td>32.17</td><td>267</td><td>128</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.22	50.76	74.00	-23.24	37.52	35.20	10.21	32.17	267	128	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																											
1	5350.22	50.76	74.00	-23.24	37.52	35.20	10.21	32.17	267	128	PEAK																																									
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5444.60</td><td>41.87</td><td>54.00</td><td>-12.13</td><td>28.63</td><td>35.20</td><td>10.29</td><td>32.25</td><td>267</td><td>128</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5444.60	41.87	54.00	-12.13	28.63	35.20	10.29	32.25	267	128	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																											
1	5444.60	41.87	54.00	-12.13	28.63	35.20	10.29	32.25	267	128	AVERAGE																																									

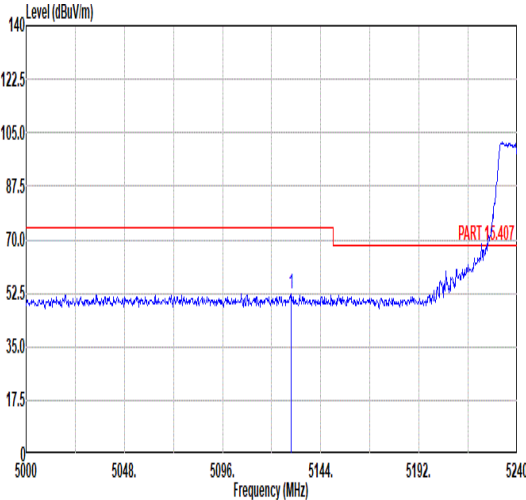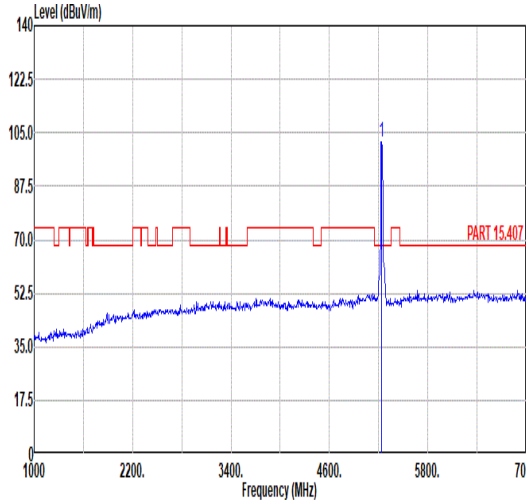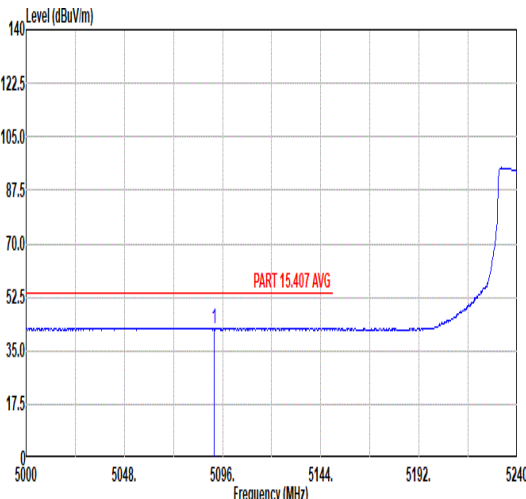
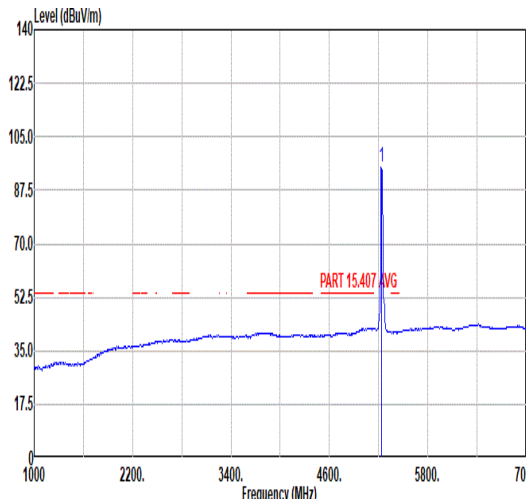


Mode	6																																																																																													
	Band Edge - L																																																																																													
	U-NII-1_5.15-5.25_802.11ac VHT20_CH48_5240MHz																																																																																													
ANT	1																																																																																													
Pol.	Vertical						Fundamental																																																																																							
Peak																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5129.36</td><td>52.49</td><td>74.00</td><td>-21.51</td><td>39.87</td><td>34.93</td><td>9.94</td><td>32.25</td><td>183</td><td>15</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5129.36	52.49	74.00	-21.51	39.87	34.93	9.94	32.25	183	15	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>101.97</td><td>-----</td><td>-----</td><td>89.06</td><td>35.07</td><td>10.04</td><td>32.20</td><td>183</td><td>15</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	101.97	-----	-----	89.06	35.07	10.04	32.20	183	15
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5129.36	52.49	74.00	-21.51	39.87	34.93	9.94	32.25	183	15	PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5240.00	101.97	-----	-----	89.06	35.07	10.04	32.20	183	15	PEAK																																																																																			
Avg																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5091.92</td><td>42.50</td><td>54.00</td><td>-11.50</td><td>29.93</td><td>34.90</td><td>9.92</td><td>32.25</td><td>183</td><td>15</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5091.92	42.50	54.00	-11.50	29.93	34.90	9.92	32.25	183	15	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>94.84</td><td>-----</td><td>-----</td><td>81.94</td><td>35.06</td><td>10.04</td><td>32.20</td><td>183</td><td>15</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	94.84	-----	-----	81.94	35.06	10.04	32.20	183	15
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5091.92	42.50	54.00	-11.50	29.93	34.90	9.92	32.25	183	15	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5240.00	94.84	-----	-----	81.94	35.06	10.04	32.20	183	15	AVERAGE																																																																																			



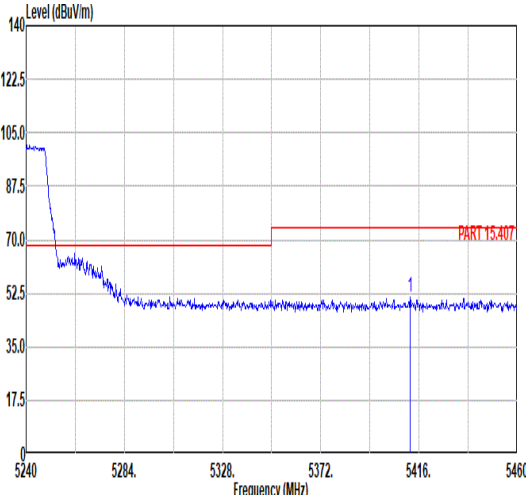
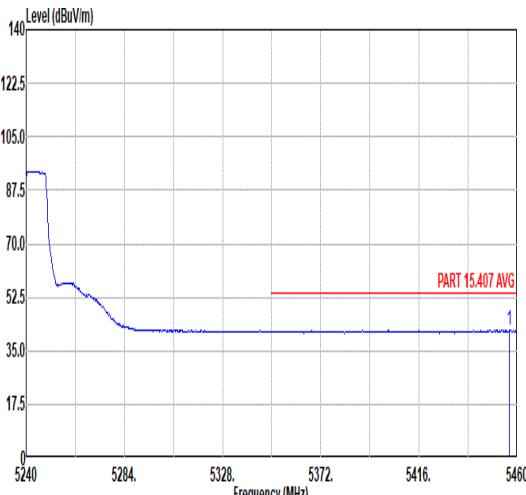


Mode	6																																																
	Band Edge - R																																																
	U-NII-1_5.15-5.25_802.11ac VHT20_CH48_5240MHz																																																
ANT	1																																																
Pol.	Vertical					Fundamental																																											
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5412.04</td><td>51.27</td><td>74.00</td><td>-22.73</td><td>37.97</td><td>35.20</td><td>10.29</td><td>32.19</td><td>183</td><td>15 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5412.04	51.27	74.00	-22.73	37.97	35.20	10.29	32.19	183	15 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																								
1	5412.04	51.27	74.00	-22.73	37.97	35.20	10.29	32.19	183	15 PEAK																																							
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5456.48</td><td>41.78</td><td>54.00</td><td>-12.22</td><td>28.54</td><td>35.20</td><td>10.30</td><td>32.26</td><td>183</td><td>15 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5456.48	41.78	54.00	-12.22	28.54	35.20	10.30	32.26	183	15 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																								
1	5456.48	41.78	54.00	-12.22	28.54	35.20	10.30	32.26	183	15 AVERAGE																																							

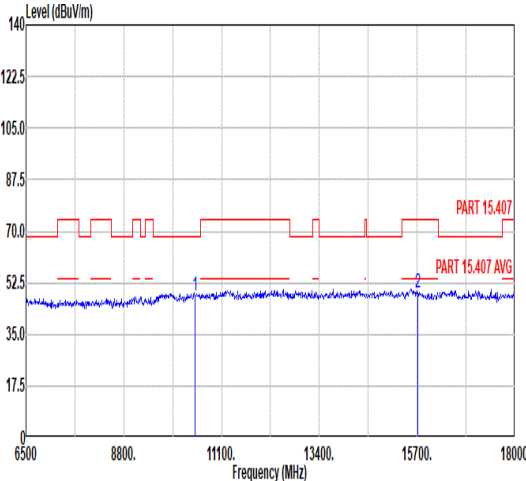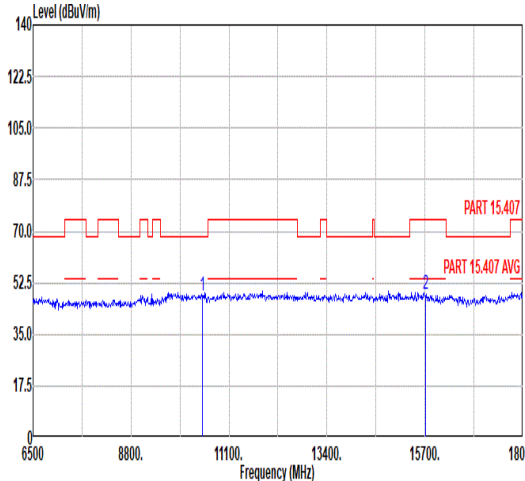

Mode	6																																																																																																					
	Harmonic																																																																																																					
	U-NII-1_5.15-5.25_802.11ac VHT20_CH48_5240MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Horizontal	Vertical																																																																																																				
Peak Avg																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>48.08</td><td>68.30</td><td>-20.22</td><td>57.12</td><td>37.29</td><td>13.36</td><td>59.69</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>15720.00</td><td>49.06</td><td>74.00</td><td>-24.94</td><td>51.14</td><td>40.33</td><td>15.87</td><td>58.28</td><td>--</td><td>-- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	48.08	68.30	-20.22	57.12	37.29	13.36	59.69	--	-- Peak	2	15720.00	49.06	74.00	-24.94	51.14	40.33	15.87	58.28	--	-- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>48.15</td><td>68.30</td><td>-20.15</td><td>57.19</td><td>37.29</td><td>13.36</td><td>59.69</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>15720.00</td><td>48.47</td><td>74.00</td><td>-25.53</td><td>50.55</td><td>40.33</td><td>15.87</td><td>58.28</td><td>--</td><td>-- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	48.15	68.30	-20.15	57.19	37.29	13.36	59.69	--	-- Peak	2	15720.00	48.47	74.00	-25.53	50.55	40.33	15.87	58.28	--	-- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	10480.00	48.08	68.30	-20.22	57.12	37.29	13.36	59.69	--	-- Peak																																																																																												
2	15720.00	49.06	74.00	-24.94	51.14	40.33	15.87	58.28	--	-- Peak																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	10480.00	48.15	68.30	-20.15	57.19	37.29	13.36	59.69	--	-- Peak																																																																																												
2	15720.00	48.47	74.00	-25.53	50.55	40.33	15.87	58.28	--	-- Peak																																																																																												

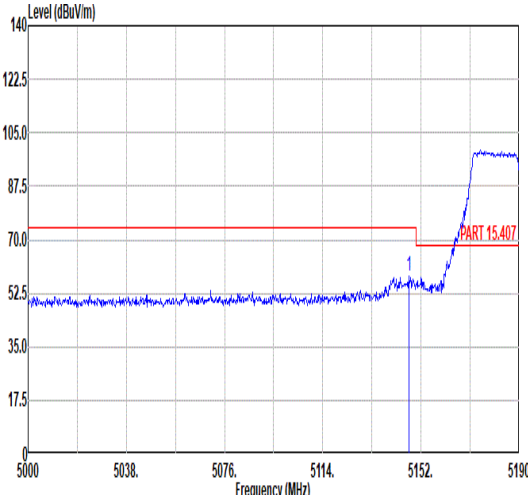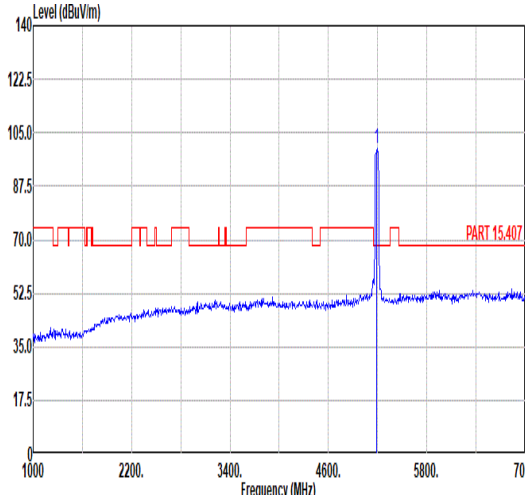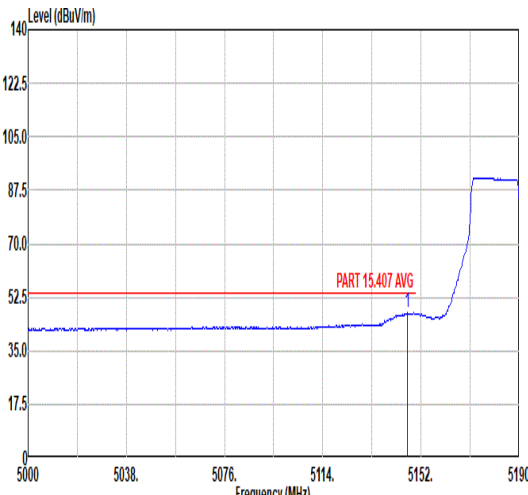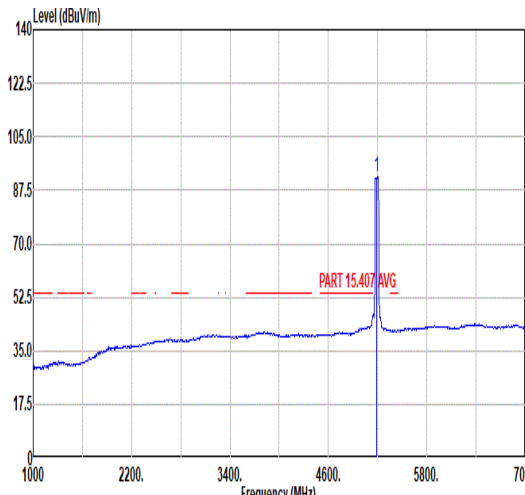

Mode	7																																																																																														
	Band Edge - L																																																																																														
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																																																																														
ANT	1																																																																																														
Pol.	Horizontal						Fundamental																																																																																								
Peak																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5147.25</td><td>57.89</td><td>74.00</td><td>-16.11</td><td>45.24</td><td>34.95</td><td>9.95</td><td>32.25</td><td>100</td><td>125</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5147.25	57.89	74.00	-16.11	45.24	34.95	9.95	32.25	100	125	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5190.00</td><td>99.61</td><td>-----</td><td>-----</td><td>86.82</td><td>35.00</td><td>9.99</td><td>32.20</td><td>100</td><td>125</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5190.00	99.61	-----	-----	86.82	35.00	9.99	32.20	100	125
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5147.25	57.89	74.00	-16.11	45.24	34.95	9.95	32.25	100	125	PEAK																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5190.00	99.61	-----	-----	86.82	35.00	9.99	32.20	100	125	PEAK																																																																																				
Avg																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5146.68</td><td>47.41</td><td>54.00</td><td>-6.59</td><td>34.76</td><td>34.95</td><td>9.95</td><td>32.25</td><td>100</td><td>125</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5146.68	47.41	54.00	-6.59	34.76	34.95	9.95	32.25	100	125	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5190.00</td><td>91.76</td><td>-----</td><td>-----</td><td>78.95</td><td>35.01</td><td>10.00</td><td>32.20</td><td>100</td><td>125</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5190.00	91.76	-----	-----	78.95	35.01	10.00	32.20	100	125
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5146.68	47.41	54.00	-6.59	34.76	34.95	9.95	32.25	100	125	AVERAGE																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5190.00	91.76	-----	-----	78.95	35.01	10.00	32.20	100	125	AVERAGE																																																																																				





Mode	7																																								
	Band Edge - R																																								
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																								
ANT	1																																								
Pol.	Horizontal	Fundamental																																							
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5449.74</td><td>51.31</td><td>74.00</td><td>-22.69</td><td>38.07</td><td>35.20</td><td>10.29</td><td>32.25</td><td>100</td><td>125 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5449.74	51.31	74.00	-22.69	38.07	35.20	10.29	32.25	100	125 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																
1	5449.74	51.31	74.00	-22.69	38.07	35.20	10.29	32.25	100	125 PEAK																															
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5455.41</td><td>41.90</td><td>54.00</td><td>-12.10</td><td>28.66</td><td>35.20</td><td>10.30</td><td>32.26</td><td>100</td><td>125 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5455.41	41.90	54.00	-12.10	28.66	35.20	10.30	32.26	100	125 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																
1	5455.41	41.90	54.00	-12.10	28.66	35.20	10.30	32.26	100	125 AVERAGE																															







Mode	7										
	Band Edge - L										
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz										
ANT	1										
Pol.	Vertical										
Peak	Fundamental										
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark
1	5148.77	58.42	74.00	-15.58	45.76	34.95	9.96	32.25	100	31	PEAK
Avg	Fundamental										
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark
1	5147.25	47.83	54.00	-6.17	35.18	34.95	9.95	32.25	100	31	AVERAGE

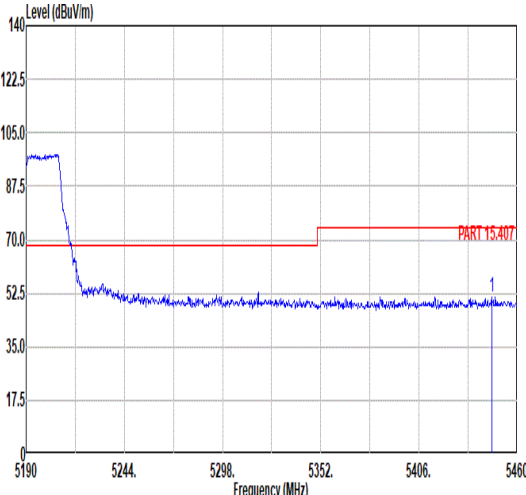
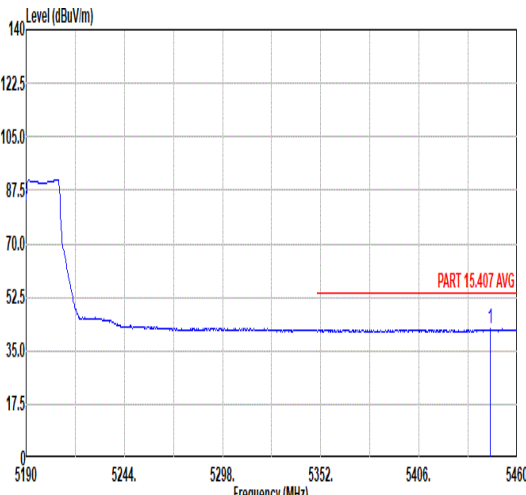


Mode	7																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11ac VHT40_CH38_5190MHz																																																		
ANT	1																																																		
Pol.	Vertical										Fundamental																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5445.96</td><td>51.30</td><td>74.00</td><td>-22.70</td><td>38.06</td><td>35.20</td><td>10.29</td><td>32.25</td><td>100</td><td>31</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5445.96	51.30	74.00	-22.70	38.06	35.20	10.29	32.25	100	31	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5445.96	51.30	74.00	-22.70	38.06	35.20	10.29	32.25	100	31	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5445.15</td><td>42.17</td><td>54.00</td><td>-11.83</td><td>28.93</td><td>35.20</td><td>10.29</td><td>32.25</td><td>100</td><td>31</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5445.15	42.17	54.00	-11.83	28.93	35.20	10.29	32.25	100	31	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5445.15	42.17	54.00	-11.83	28.93	35.20	10.29	32.25	100	31	AVERAGE																																								

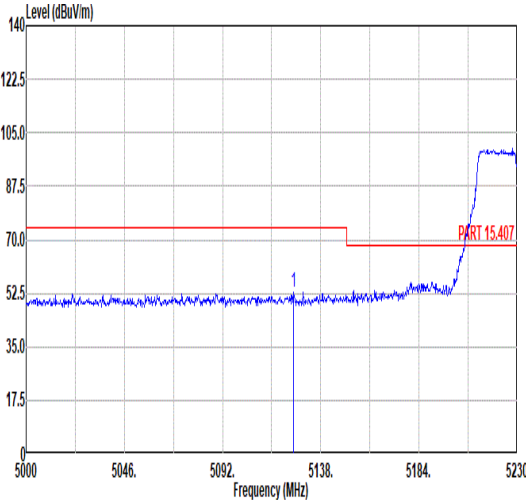
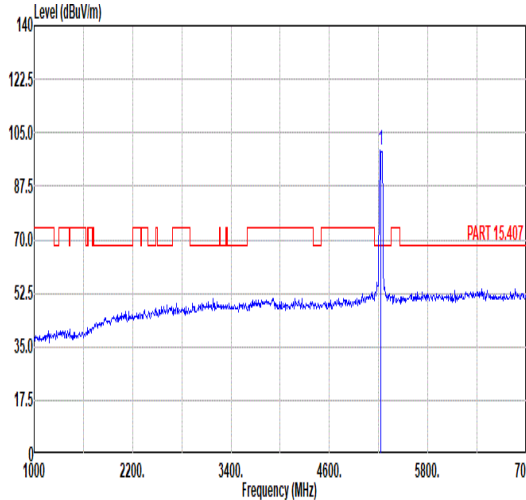
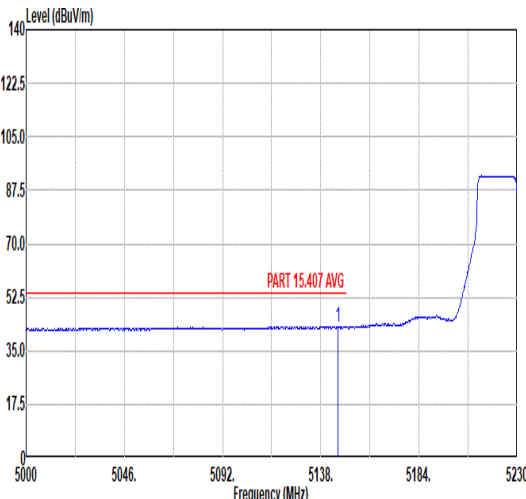
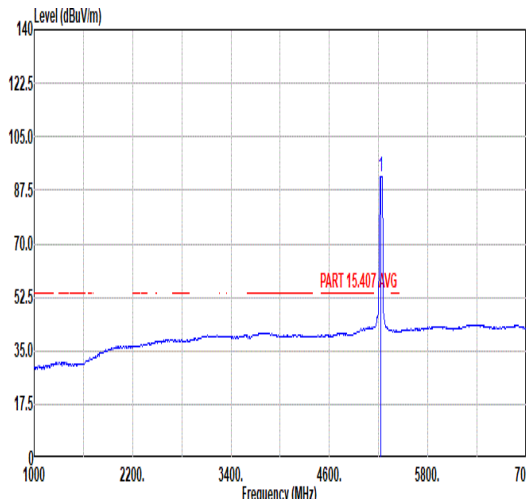


Mode	8																																																																																										
	Band Edge - L																																																																																										
	U-NII-1_5.15-5.25_802.11ac VHT40_CH46_5230MHz																																																																																										
ANT	1																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5125.12</td><td>53.04</td><td>74.00</td><td>-20.96</td><td>40.42</td><td>34.93</td><td>9.94</td><td>32.25</td><td>101</td><td>124</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5125.12	53.04	74.00	-20.96	40.42	34.93	9.94	32.25	101	124	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>99.30</td><td>-----</td><td>-----</td><td>86.44</td><td>35.04</td><td>10.02</td><td>32.20</td><td>101</td><td>124</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5230.00	99.30	-----	-----	86.44	35.04	10.02	32.20	101	124
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5125.12	53.04	74.00	-20.96	40.42	34.93	9.94	32.25	101	124	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5230.00	99.30	-----	-----	86.44	35.04	10.02	32.20	101	124	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5146.05</td><td>43.03</td><td>54.00</td><td>-10.97</td><td>30.38</td><td>34.95</td><td>9.95</td><td>32.25</td><td>101</td><td>124</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5146.05	43.03	54.00	-10.97	30.38	34.95	9.95	32.25	101	124	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>92.11</td><td>-----</td><td>-----</td><td>79.27</td><td>35.03</td><td>10.01</td><td>32.20</td><td>101</td><td>124</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5230.00	92.11	-----	-----	79.27	35.03	10.01	32.20	101	124
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5146.05	43.03	54.00	-10.97	30.38	34.95	9.95	32.25	101	124	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5230.00	92.11	-----	-----	79.27	35.03	10.01	32.20	101	124	AVERAGE																																																																																

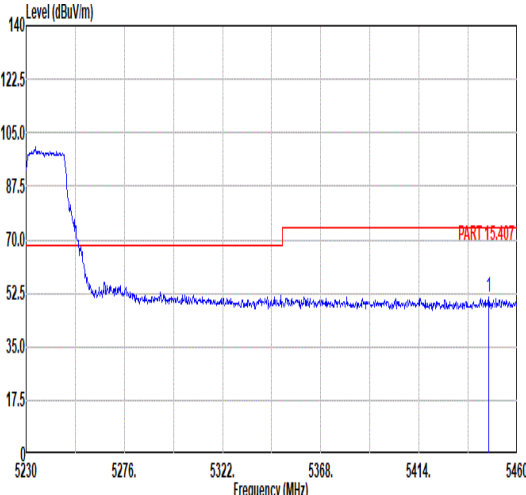
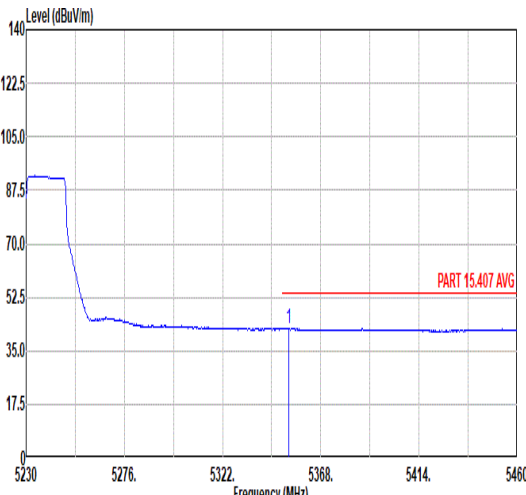


Mode	8																																																			
	Band Edge - R																																																			
	U-NII-1_5.15-5.25_802.11ac VHT40_CH46_5230MHz																																																			
ANT	1																																																			
Pol.	Horizontal						Fundamental																																													
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5446.66</td><td>51.06</td><td>74.00</td><td>-22.94</td><td>37.82</td><td>35.20</td><td>10.29</td><td>32.25</td><td>101</td><td>124</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5446.66	51.06	74.00	-22.94	37.82	35.20	10.29	32.25	101	124	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																											
1	5446.66	51.06	74.00	-22.94	37.82	35.20	10.29	32.25	101	124	PEAK																																									
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5352.82</td><td>42.35</td><td>54.00</td><td>-11.65</td><td>29.10</td><td>35.20</td><td>10.22</td><td>32.17</td><td>101</td><td>124</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5352.82	42.35	54.00	-11.65	29.10	35.20	10.22	32.17	101	124	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																											
1	5352.82	42.35	54.00	-11.65	29.10	35.20	10.22	32.17	101	124	AVERAGE																																									

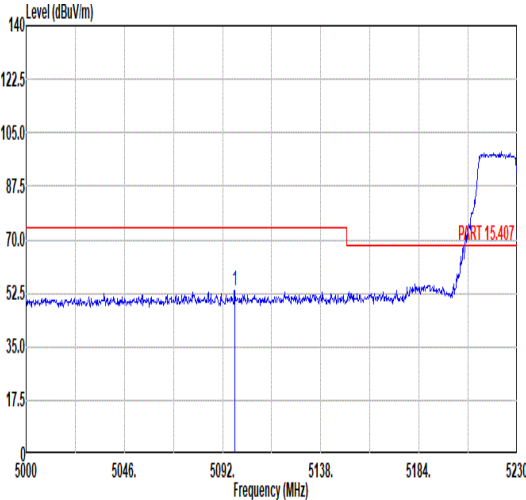
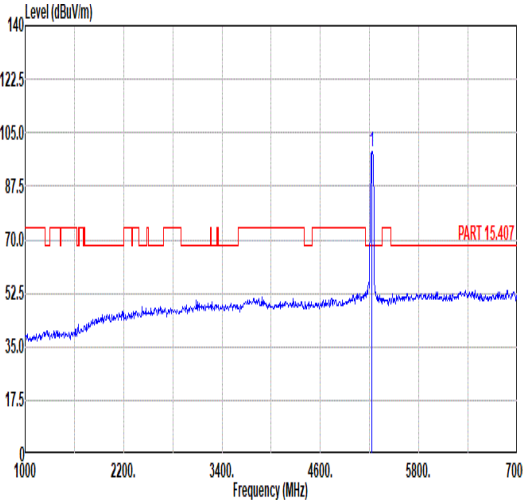
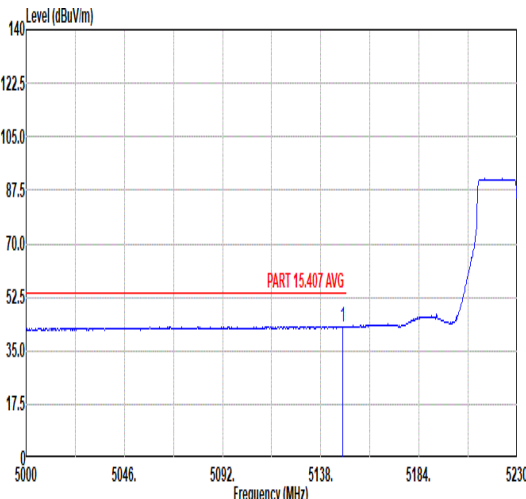
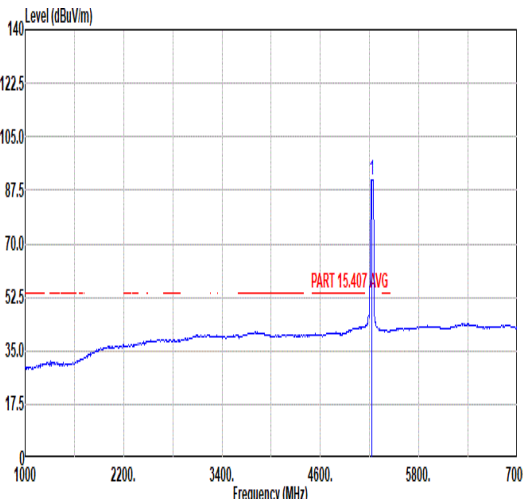


Mode	8																																																																																
	Band Edge - L																																																																																
	U-NII-1_5.15-5.25_802.11ac VHT40_CH46_5230MHz																																																																																
ANT	1																																																																																
Pol.	Vertical						Fundamental																																																																										
Peak																																																																																	
		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5097.75	53.30	74.00	-20.70	40.73	34.90	9.92	32.25	101	32	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>98.73</td><td>-----</td><td>-----</td><td>85.85</td><td>35.05</td><td>10.03</td><td>32.20</td><td>101</td><td>32</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5230.00	98.73	-----	-----	85.85	35.05	10.03	32.20	101	32	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5097.75	53.30	74.00	-20.70	40.73	34.90	9.92	32.25	101	32	PEAK																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5230.00	98.73	-----	-----	85.85	35.05	10.03	32.20	101	32	PEAK																																																																						
Avg																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.12</td><td>43.01</td><td>54.00</td><td>-10.99</td><td>30.35</td><td>34.95</td><td>9.96</td><td>32.25</td><td>101</td><td>32</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5148.12	43.01	54.00	-10.99	30.35	34.95	9.96	32.25	101	32	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>91.00</td><td>-----</td><td>-----</td><td>78.16</td><td>35.03</td><td>10.01</td><td>32.20</td><td>101</td><td>32</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5230.00	91.00	-----	-----	78.16	35.03	10.01	32.20	101	32
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5148.12	43.01	54.00	-10.99	30.35	34.95	9.96	32.25	101	32	AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5230.00	91.00	-----	-----	78.16	35.03	10.01	32.20	101	32	AVERAGE																																																																						

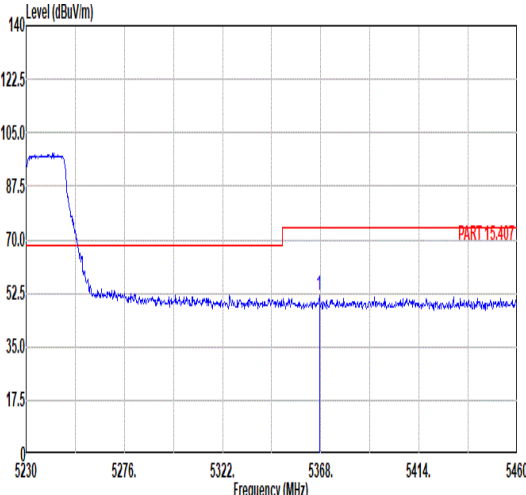
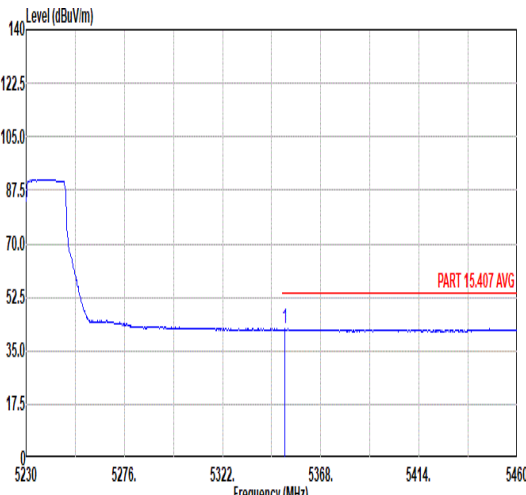


Mode	8																																																
	Band Edge - R																																																
	U-NII-1_5.15-5.25_802.11ac VHT40_CH46_5230MHz																																																
ANT	1																																																
Pol.	Vertical					Fundamental																																											
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5367.31</td><td>51.62</td><td>74.00</td><td>-22.38</td><td>38.35</td><td>35.20</td><td>10.24</td><td>32.17</td><td>101</td><td>32 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5367.31	51.62	74.00	-22.38	38.35	35.20	10.24	32.17	101	32 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																								
1	5367.31	51.62	74.00	-22.38	38.35	35.20	10.24	32.17	101	32 PEAK																																							
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.98</td><td>42.04</td><td>54.00</td><td>-11.96</td><td>28.80</td><td>35.20</td><td>10.21</td><td>32.17</td><td>101</td><td>32 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.98	42.04	54.00	-11.96	28.80	35.20	10.21	32.17	101	32 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																								
1	5350.98	42.04	54.00	-11.96	28.80	35.20	10.21	32.17	101	32 AVERAGE																																							

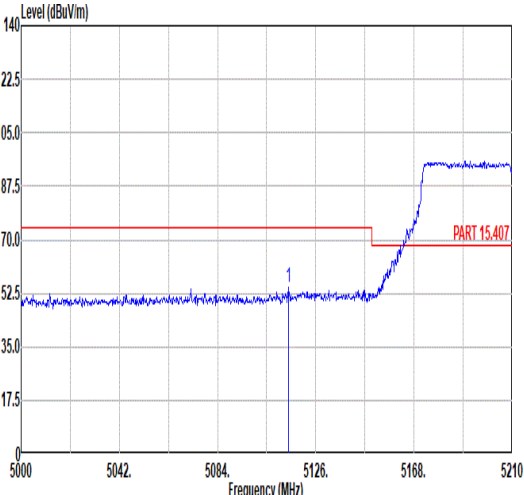
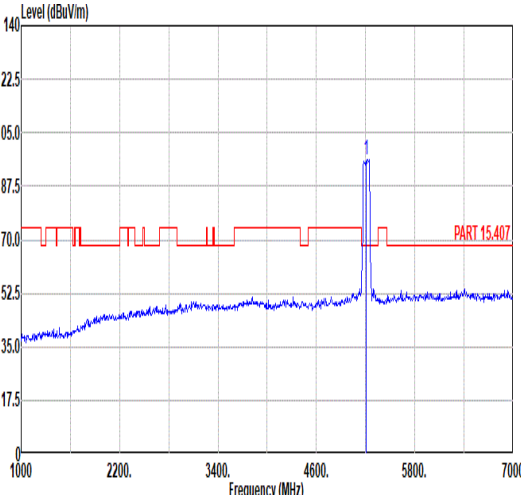
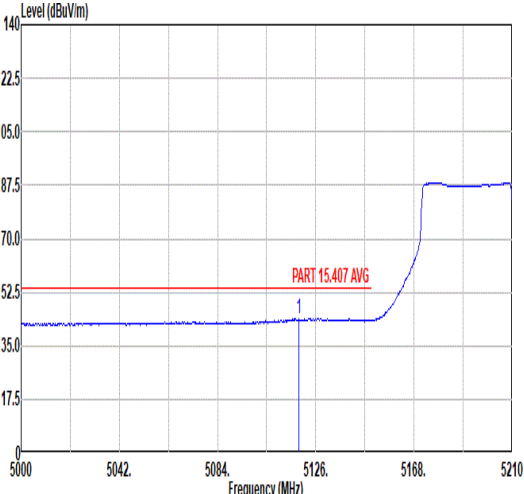
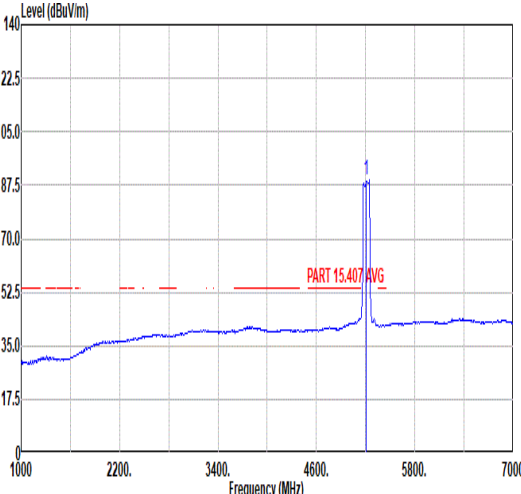


Mode	9																																																																																										
	Band Edge - L																																																																																										
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																																										
ANT	1																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5114.24</td><td>54.42</td><td>74.00</td><td>-19.58</td><td>41.82</td><td>34.92</td><td>9.93</td><td>32.25</td><td>103</td><td>125</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5114.24	54.42	74.00	-19.58	41.82	34.92	9.93	32.25	103	125	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>96.21</td><td>-----</td><td>-----</td><td>83.25</td><td>35.10</td><td>10.06</td><td>32.20</td><td>103</td><td>125</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5210.00	96.21	-----	-----	83.25	35.10	10.06	32.20	103	125
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5114.24	54.42	74.00	-19.58	41.82	34.92	9.93	32.25	103	125	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5210.00	96.21	-----	-----	83.25	35.10	10.06	32.20	103	125	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5118.65</td><td>43.81</td><td>54.00</td><td>-10.19</td><td>31.21</td><td>34.92</td><td>9.93</td><td>32.25</td><td>103</td><td>125</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5118.65	43.81	54.00	-10.19	31.21	34.92	9.93	32.25	103	125	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>89.26</td><td>-----</td><td>-----</td><td>76.30</td><td>35.10</td><td>10.06</td><td>32.20</td><td>103</td><td>125</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5210.00	89.26	-----	-----	76.30	35.10	10.06	32.20	103	125
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5118.65	43.81	54.00	-10.19	31.21	34.92	9.93	32.25	103	125	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5210.00	89.26	-----	-----	76.30	35.10	10.06	32.20	103	125	AVERAGE																																																																																

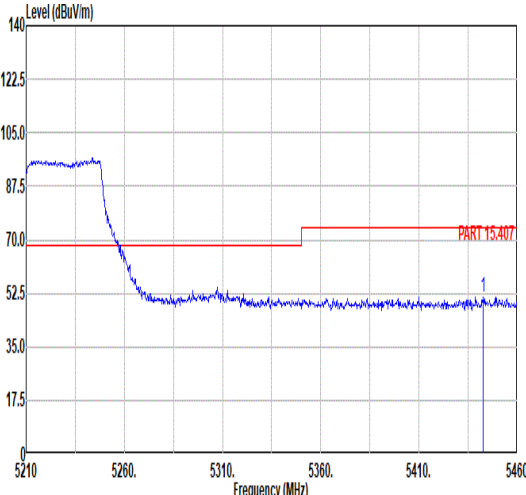
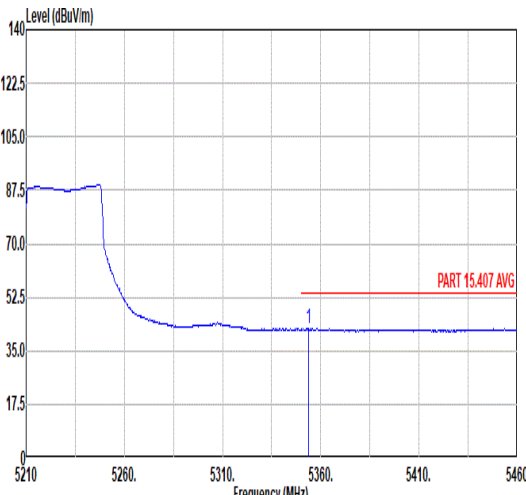


Mode	9																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																		
ANT	1																																																		
Pol.	Horizontal							Fundamental																																											
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5442.50</td><td>51.46</td><td>74.00</td><td>-22.54</td><td>38.21</td><td>35.20</td><td>10.29</td><td>32.24</td><td>103</td><td>125</td><td>PEAK</td></tr></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5442.50	51.46	74.00	-22.54	38.21	35.20	10.29	32.24	103	125	PEAK	Blank			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5442.50	51.46	74.00	-22.54	38.21	35.20	10.29	32.24	103	125	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5353.75</td><td>42.25</td><td>54.00</td><td>-11.75</td><td>29.00</td><td>35.20</td><td>10.22</td><td>32.17</td><td>103</td><td>125</td><td>AVERAGE</td></tr></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5353.75	42.25	54.00	-11.75	29.00	35.20	10.22	32.17	103	125	AVERAGE	Blank			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5353.75	42.25	54.00	-11.75	29.00	35.20	10.22	32.17	103	125	AVERAGE																																								

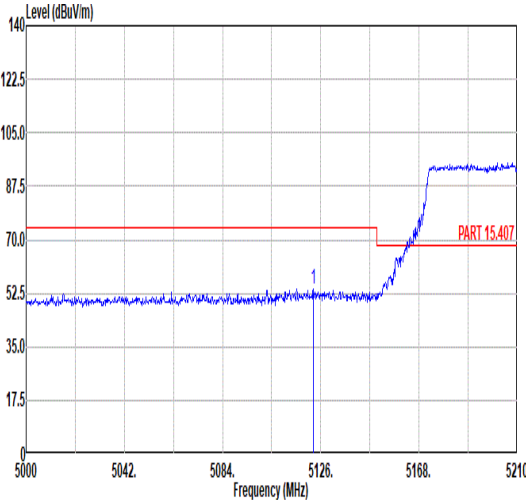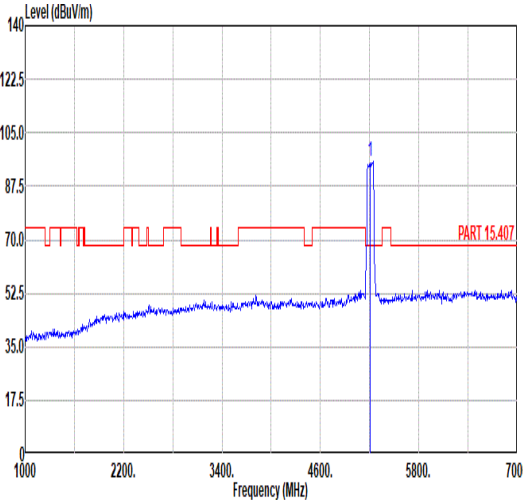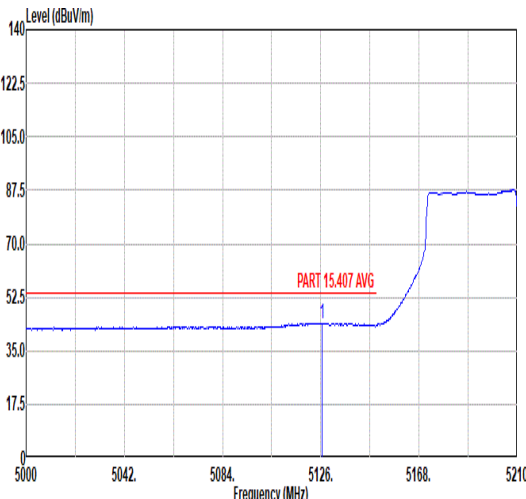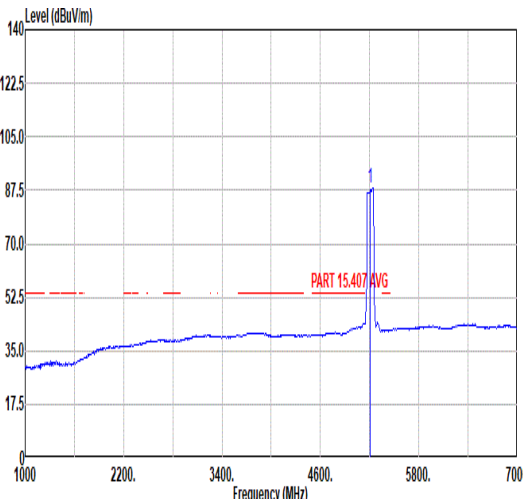

Mode	9																																																																																													
	Band Edge - L																																																																																													
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																																													
ANT	1																																																																																													
Pol.	Vertical						Fundamental																																																																																							
Peak																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5122.85</td><td>53.85</td><td>74.00</td><td>-20.15</td><td>41.23</td><td>34.93</td><td>9.94</td><td>32.25</td><td>100</td><td>31</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5122.85	53.85	74.00	-20.15	41.23	34.93	9.94	32.25	100	31	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5210.00</td><td>95.41</td><td>-----</td><td>-----</td><td>82.45</td><td>35.10</td><td>10.06</td><td>32.20</td><td>100</td><td>31</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5210.00	95.41	-----	-----	82.45	35.10	10.06	32.20	100	31
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5122.85	53.85	74.00	-20.15	41.23	34.93	9.94	32.25	100	31	PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5210.00	95.41	-----	-----	82.45	35.10	10.06	32.20	100	31	PEAK																																																																																			
Avg																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5126.63</td><td>44.02</td><td>54.00</td><td>-9.98</td><td>31.40</td><td>34.93</td><td>9.94</td><td>32.25</td><td>100</td><td>31</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5126.63	44.02	54.00	-9.98	31.40	34.93	9.94	32.25	100	31	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5210.00</td><td>88.43</td><td>-----</td><td>-----</td><td>75.47</td><td>35.10</td><td>10.06</td><td>32.20</td><td>100</td><td>31</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5210.00	88.43	-----	-----	75.47	35.10	10.06	32.20	100	31
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5126.63	44.02	54.00	-9.98	31.40	34.93	9.94	32.25	100	31	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5210.00	88.43	-----	-----	75.47	35.10	10.06	32.20	100	31	AVERAGE																																																																																			

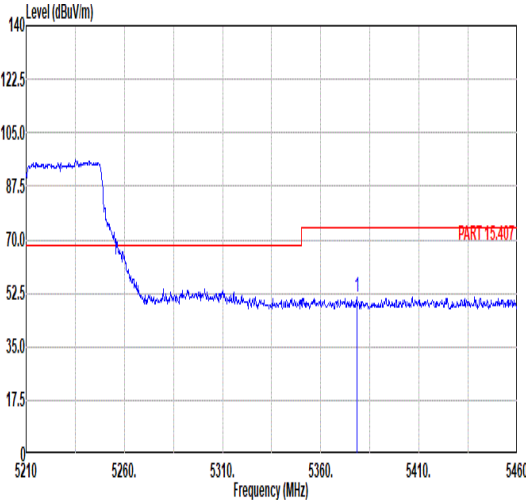
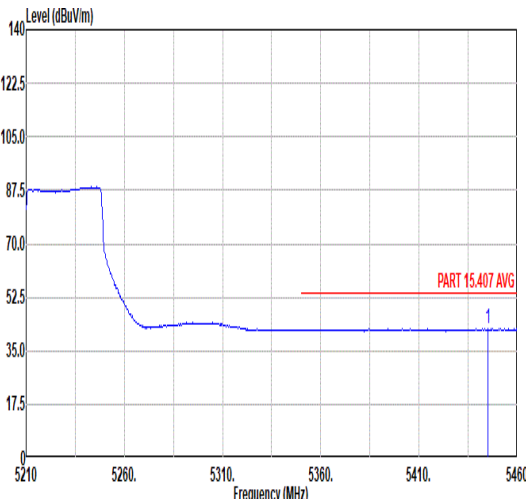


Mode	9																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																		
ANT	1																																																		
Pol.	Vertical						Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5378.25</td><td>51.46</td><td>74.00</td><td>-22.54</td><td>38.19</td><td>35.20</td><td>10.25</td><td>32.18</td><td>100</td><td>31</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5378.25	51.46	74.00	-22.54	38.19	35.20	10.25	32.18	100	31	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5378.25	51.46	74.00	-22.54	38.19	35.20	10.25	32.18	100	31	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5445.25</td><td>42.33</td><td>54.00</td><td>-11.67</td><td>29.09</td><td>35.20</td><td>10.29</td><td>32.25</td><td>100</td><td>31</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5445.25	42.33	54.00	-11.67	29.09	35.20	10.29	32.25	100	31	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5445.25	42.33	54.00	-11.67	29.09	35.20	10.29	32.25	100	31	AVERAGE																																								







Mode	10																																																																																												
	Band Edge - L																																																																																												
	U-NII-1/2A_5.15-5.35_802.11ac VHT160_CH50_5250MHz																																																																																												
ANT	1																																																																																												
Pol.	Horizontal					Fundamental																																																																																							
Peak																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5114.00</td><td>58.15</td><td>74.00</td><td>-15.85</td><td>45.55</td><td>34.92</td><td>9.93</td><td>32.25</td><td>100</td><td>123</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5114.00	58.15	74.00	-15.85	45.55	34.92	9.93	32.25	100	123	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5250.00</td><td>93.94</td><td>-----</td><td>-----</td><td>80.94</td><td>35.12</td><td>10.08</td><td>32.20</td><td>100</td><td>123</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5250.00	93.94	-----	-----	80.94	35.12	10.08	32.20	100	123
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5114.00	58.15	74.00	-15.85	45.55	34.92	9.93	32.25	100	123	PEAK																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5250.00	93.94	-----	-----	80.94	35.12	10.08	32.20	100	123	PEAK																																																																																		
Avg																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5139.75</td><td>49.51</td><td>54.00</td><td>-4.49</td><td>36.87</td><td>34.94</td><td>9.95</td><td>32.25</td><td>100</td><td>123</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5139.75	49.51	54.00	-4.49	36.87	34.94	9.95	32.25	100	123	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5250.00</td><td>86.76</td><td>-----</td><td>-----</td><td>73.78</td><td>35.11</td><td>10.07</td><td>32.20</td><td>100</td><td>123</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5250.00	86.76	-----	-----	73.78	35.11	10.07	32.20	100	123
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5139.75	49.51	54.00	-4.49	36.87	34.94	9.95	32.25	100	123	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5250.00	86.76	-----	-----	73.78	35.11	10.07	32.20	100	123	AVERAGE																																																																																		

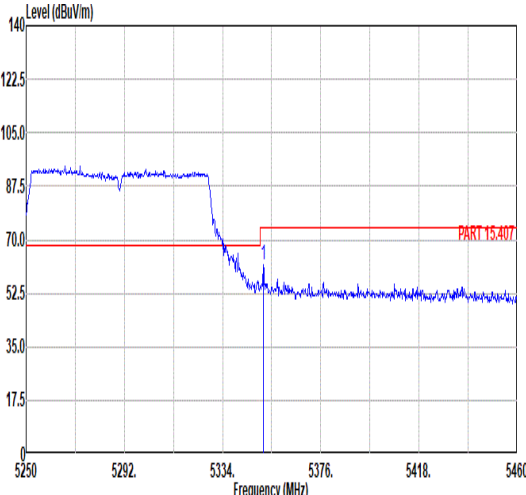
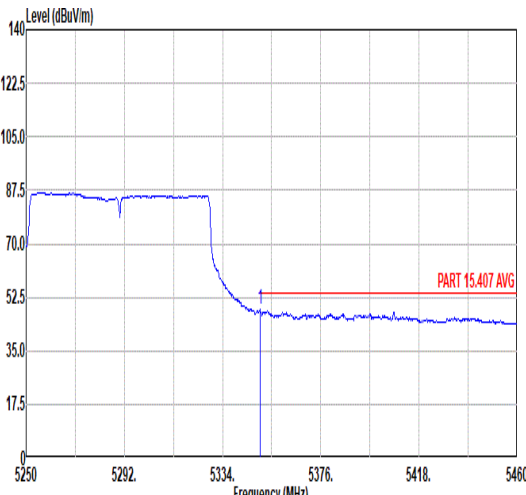


Mode	10																																																	
	Band Edge - R																																																	
	U-NII-1/2A_5.15-5.35_802.11ac VHT160_CH50_5250MHz																																																	
ANT	1																																																	
Pol.	Horizontal					Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.43</td><td>61.60</td><td>74.00</td><td>-12.40</td><td>48.36</td><td>35.20</td><td>10.21</td><td>32.17</td><td>100</td><td>123</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5351.43	61.60	74.00	-12.40	48.36	35.20	10.21	32.17	100	123	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5351.43	61.60	74.00	-12.40	48.36	35.20	10.21	32.17	100	123	PEAK																																							
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.17</td><td>48.62</td><td>54.00</td><td>-5.38</td><td>35.38</td><td>35.20</td><td>10.21</td><td>32.17</td><td>100</td><td>123</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.17	48.62	54.00	-5.38	35.38	35.20	10.21	32.17	100	123	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5350.17	48.62	54.00	-5.38	35.38	35.20	10.21	32.17	100	123	AVERAGE																																							

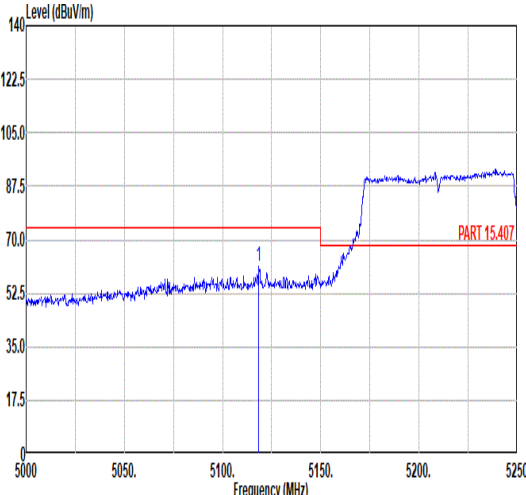
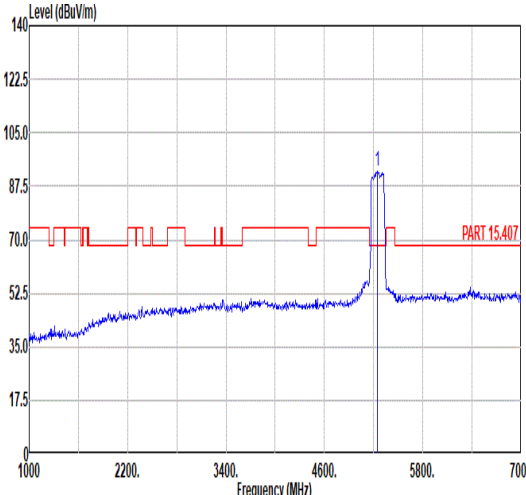
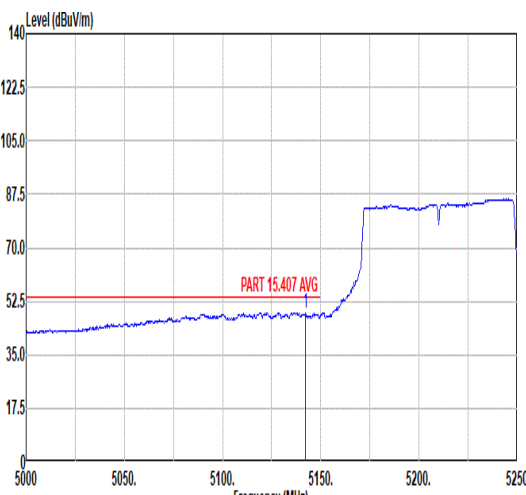
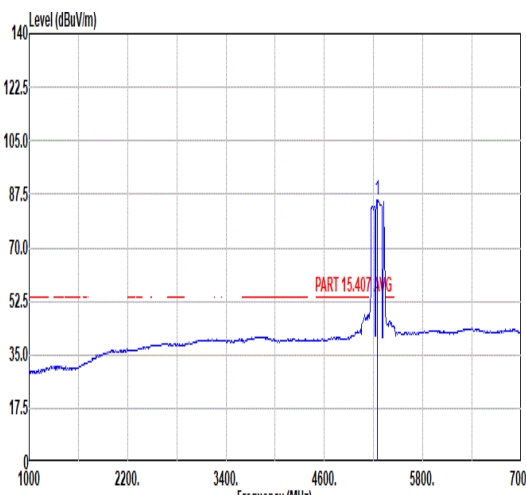


Mode	10																																																																																											
	Band Edge - L																																																																																											
	U-NII-1/2A_5.15-5.35_802.11ac VHT160_CH50_5250MHz																																																																																											
ANT	1																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5142.25</td><td>61.27</td><td>74.00</td><td>-12.73</td><td>48.67</td><td>34.92</td><td>9.93</td><td>32.25</td><td>100</td><td>31</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5142.25	61.27	74.00	-12.73	48.67	34.92	9.93	32.25	100	31	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5250.00</td><td>92.65</td><td>-----</td><td>-----</td><td>79.72</td><td>35.08</td><td>10.05</td><td>32.20</td><td>100</td><td>31</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5250.00	92.65	-----	-----	79.72	35.08	10.05	32.20	100	31
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5142.25	61.27	74.00	-12.73	48.67	34.92	9.93	32.25	100	31	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5250.00	92.65	-----	-----	79.72	35.08	10.05	32.20	100	31	PEAK																																																																																	
Avg																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5142.25</td><td>48.77</td><td>54.00</td><td>-5.23</td><td>36.13</td><td>34.94</td><td>9.95</td><td>32.25</td><td>100</td><td>31</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5142.25	48.77	54.00	-5.23	36.13	34.94	9.95	32.25	100	31	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5250.00</td><td>85.67</td><td>-----</td><td>-----</td><td>72.67</td><td>35.12</td><td>10.08</td><td>32.20</td><td>100</td><td>31</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5250.00	85.67	-----	-----	72.67	35.12	10.08	32.20	100	31
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5142.25	48.77	54.00	-5.23	36.13	34.94	9.95	32.25	100	31	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5250.00	85.67	-----	-----	72.67	35.12	10.08	32.20	100	31	AVERAGE																																																																																	



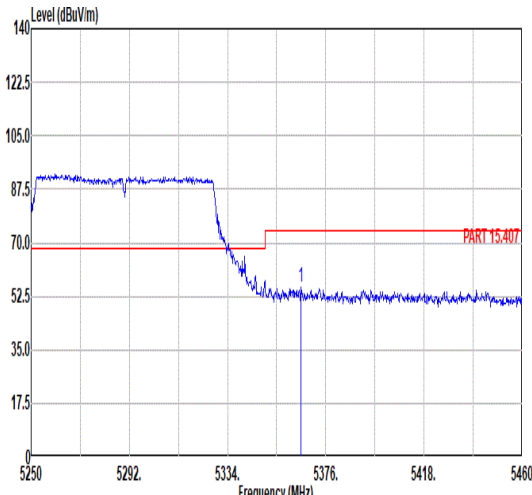
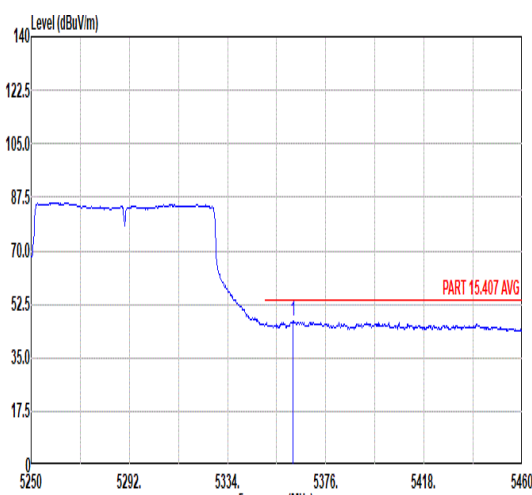


Mode	10																																								
	Band Edge - R																																								
	U-NII-1/2A_5.15-5.35_802.11ac VHT160_CH50_5250MHz																																								
ANT	1																																								
Pol.	Vertical	Fundamental																																							
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5365.50</td><td>55.73</td><td>74.00</td><td>-18.27</td><td>42.47</td><td>35.20</td><td>10.23</td><td>32.17</td><td>100</td><td>31 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5365.50	55.73	74.00	-18.27	42.47	35.20	10.23	32.17	100	31 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																
1	5365.50	55.73	74.00	-18.27	42.47	35.20	10.23	32.17	100	31 PEAK																															
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5361.93</td><td>47.20</td><td>54.00</td><td>-6.80</td><td>33.94</td><td>35.20</td><td>10.23</td><td>32.17</td><td>100</td><td>31 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5361.93	47.20	54.00	-6.80	33.94	35.20	10.23	32.17	100	31 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																
1	5361.93	47.20	54.00	-6.80	33.94	35.20	10.23	32.17	100	31 AVERAGE																															

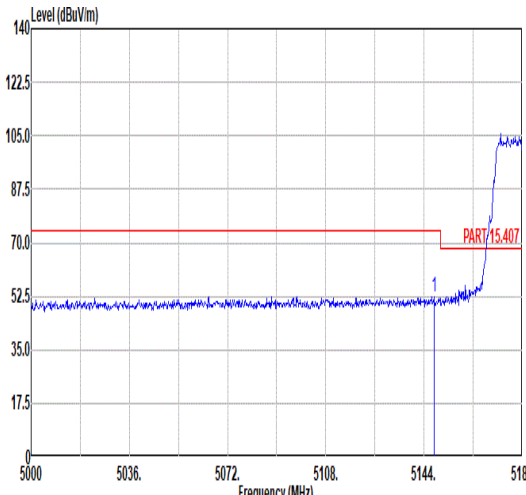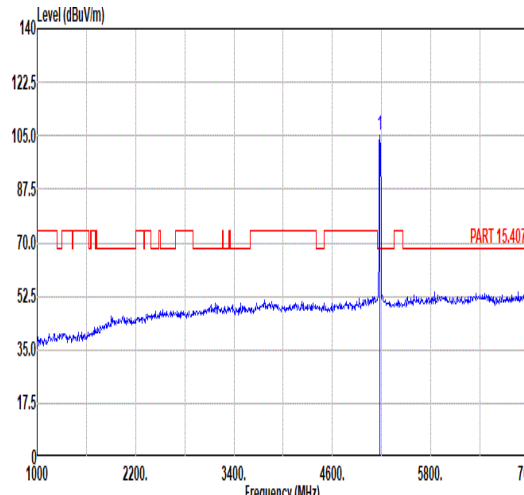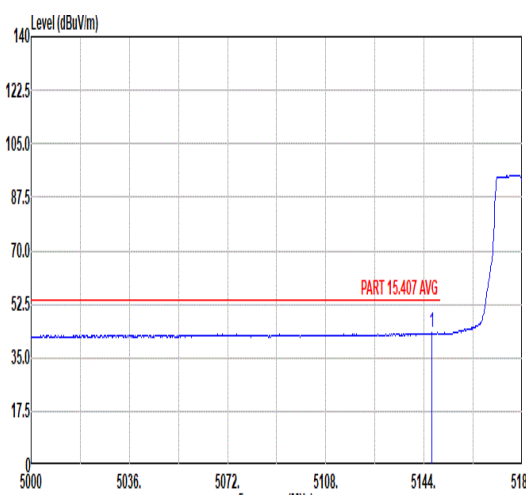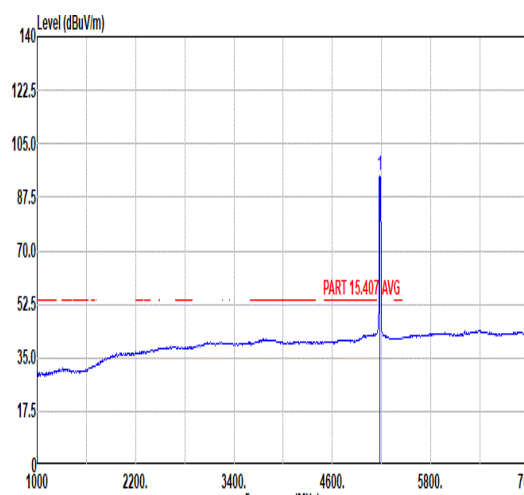


Mode	11																																																			
	Band Edge																																																			
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																			
ANT	1																																																			
Pol.	Horizontal																																																			
Peak																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.60</td><td>52.26</td><td>74.00</td><td>-21.74</td><td>39.61</td><td>34.95</td><td>9.95</td><td>32.25</td><td>104</td><td>125</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.60	52.26	74.00	-21.74	39.61	34.95	9.95	32.25	104	125	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5147.60	52.26	74.00	-21.74	39.61	34.95	9.95	32.25	104	125	PEAK																																									
Fundamental																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>104.95</td><td>-----</td><td>-----</td><td>92.22</td><td>34.98</td><td>9.97</td><td>32.22</td><td>104</td><td>125</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	104.95	-----	-----	92.22	34.98	9.97	32.22	104	125	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5180.00	104.95	-----	-----	92.22	34.98	9.97	32.22	104	125	PEAK																																									
Avg																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5146.88</td><td>43.11</td><td>54.00</td><td>-10.89</td><td>30.46</td><td>34.95</td><td>9.95</td><td>32.25</td><td>104</td><td>125</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5146.88	43.11	54.00	-10.89	30.46	34.95	9.95	32.25	104	125	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5146.88	43.11	54.00	-10.89	30.46	34.95	9.95	32.25	104	125	AVERAGE																																									
AVERAGE																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>94.64</td><td>-----</td><td>-----</td><td>81.91</td><td>34.98</td><td>9.97</td><td>32.22</td><td>104</td><td>125</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	94.64	-----	-----	81.91	34.98	9.97	32.22	104	125	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5180.00	94.64	-----	-----	81.91	34.98	9.97	32.22	104	125	AVERAGE																																									

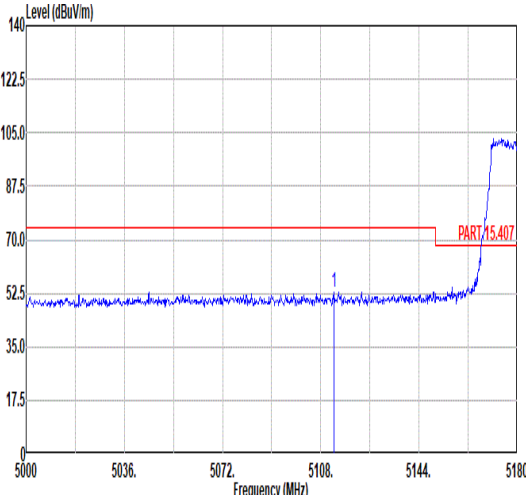
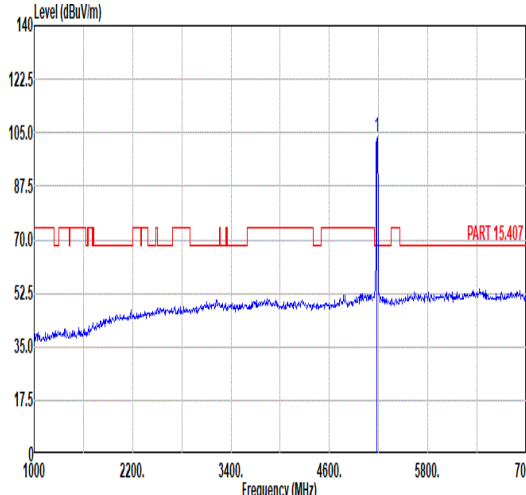
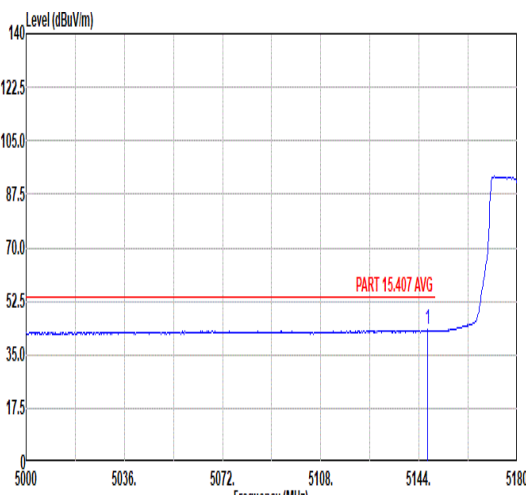
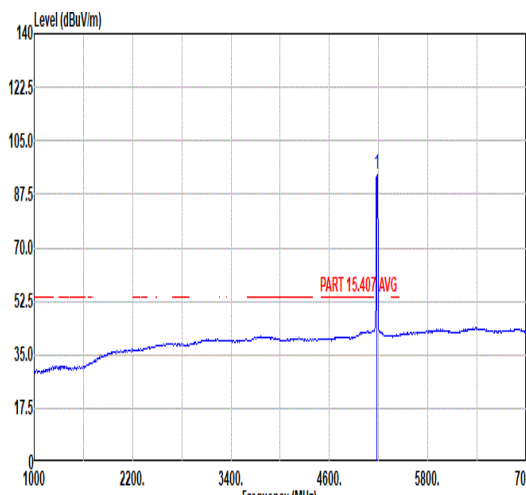


Mode	11																																																																																									
	Band Edge																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5112.86</td><td>52.87</td><td>74.00</td><td>-21.13</td><td>40.27</td><td>34.92</td><td>9.93</td><td>32.25</td><td>102</td><td>31</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5112.86	52.87	74.00	-21.13	40.27	34.92	9.93	32.25	102	31	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>103.49</td><td>-----</td><td>-----</td><td>90.73</td><td>34.99</td><td>9.98</td><td>32.21</td><td>102</td><td>31</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	103.49	-----	-----	90.73	34.99	9.98	32.21	102	31
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5112.86	52.87	74.00	-21.13	40.27	34.92	9.93	32.25	102	31	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	103.49	-----	-----	90.73	34.99	9.98	32.21	102	31	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.24</td><td>43.08</td><td>54.00</td><td>-10.92</td><td>30.43</td><td>34.95</td><td>9.95</td><td>32.25</td><td>102</td><td>31</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5147.24	43.08	54.00	-10.92	30.43	34.95	9.95	32.25	102	31	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>93.88</td><td>-----</td><td>-----</td><td>81.12</td><td>34.99</td><td>9.98</td><td>32.21</td><td>102</td><td>31</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	93.88	-----	-----	81.12	34.99	9.98	32.21	102	31
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5147.24	43.08	54.00	-10.92	30.43	34.95	9.95	32.25	102	31	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5180.00	93.88	-----	-----	81.12	34.99	9.98	32.21	102	31	AVERAGE																																																																															




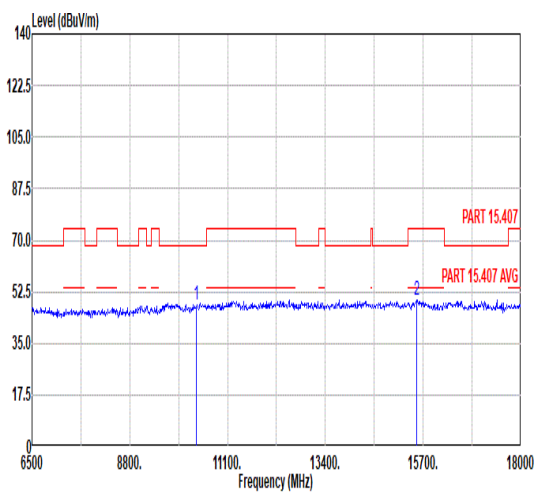


Mode	11																																																	
	Harmonic																																																	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																	
ANT	1																																																	
Pol.	Horizontal					Vertical																																												
Peak Avg																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>10360.00</td><td>48.07</td><td>68.30</td><td>-20.23</td><td>57.22</td><td>37.22</td><td>13.25</td></tr><tr><td>2</td><td>15540.00</td><td>49.69</td><td>74.00</td><td>-24.31</td><td>51.50</td><td>40.22</td><td>15.86</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10360.00	48.07	68.30	-20.23	57.22	37.22	13.25	2	15540.00	49.69	74.00	-24.31	51.50	40.22	15.86
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																											
1	10360.00	48.07	68.30	-20.23	57.22	37.22	13.25																																											
2	15540.00	49.69	74.00	-24.31	51.50	40.22	15.86																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>10360.00</td><td>47.68</td><td>68.30</td><td>-20.62</td><td>56.83</td><td>37.22</td><td>13.25</td></tr><tr><td>2</td><td>15540.00</td><td>48.45</td><td>74.00</td><td>-25.55</td><td>50.26</td><td>40.22</td><td>15.86</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10360.00	47.68	68.30	-20.62	56.83	37.22	13.25	2	15540.00	48.45	74.00	-25.55	50.26	40.22	15.86
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																											
1	10360.00	47.68	68.30	-20.62	56.83	37.22	13.25																																											
2	15540.00	48.45	74.00	-25.55	50.26	40.22	15.86																																											

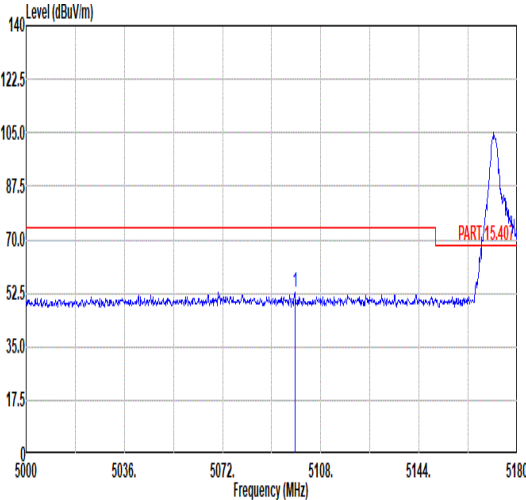
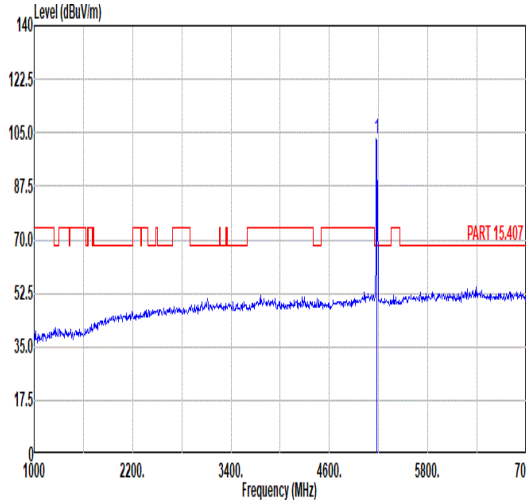
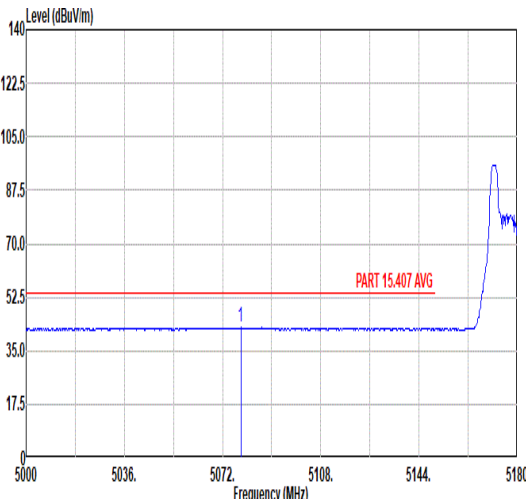
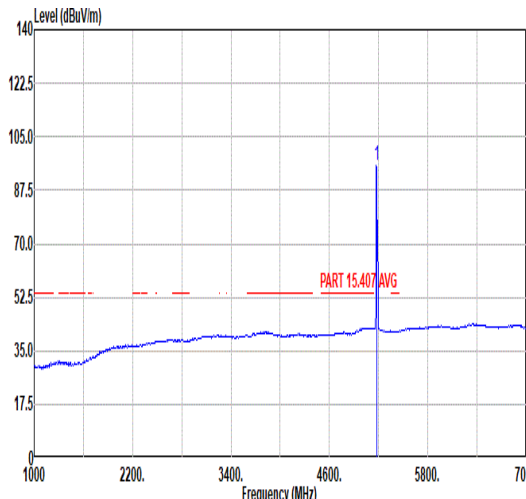


Mode	12																																																																																										
	Band Edge																																																																																										
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Partial_RU26/0_5180MHz																																																																																										
ANT	1																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5098.46</td><td>52.69</td><td>74.00</td><td>-21.31</td><td>40.12</td><td>34.90</td><td>9.92</td><td>32.25</td><td>100</td><td>125</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5098.46	52.69	74.00	-21.31	40.12	34.90	9.92	32.25	100	125	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>102.85</td><td>-----</td><td>-----</td><td>90.14</td><td>34.97</td><td>9.97</td><td>32.23</td><td>100</td><td>125</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	102.85	-----	-----	90.14	34.97	9.97	32.23	100	125
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5098.46	52.69	74.00	-21.31	40.12	34.90	9.92	32.25	100	125	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5180.00	102.85	-----	-----	90.14	34.97	9.97	32.23	100	125	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5078.66</td><td>42.72</td><td>54.00</td><td>-11.28</td><td>30.18</td><td>34.88</td><td>9.91</td><td>32.25</td><td>100</td><td>125</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5078.66	42.72	54.00	-11.28	30.18	34.88	9.91	32.25	100	125	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>95.55</td><td>-----</td><td>-----</td><td>82.84</td><td>34.97</td><td>9.97</td><td>32.23</td><td>100</td><td>125</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	95.55	-----	-----	82.84	34.97	9.97	32.23	100	125
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5078.66	42.72	54.00	-11.28	30.18	34.88	9.91	32.25	100	125	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5180.00	95.55	-----	-----	82.84	34.97	9.97	32.23	100	125	AVERAGE																																																																																

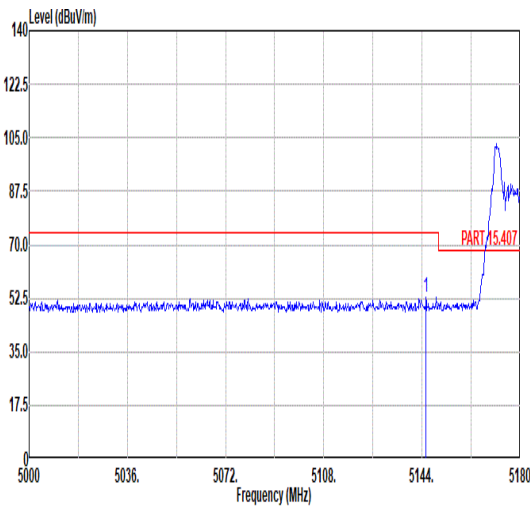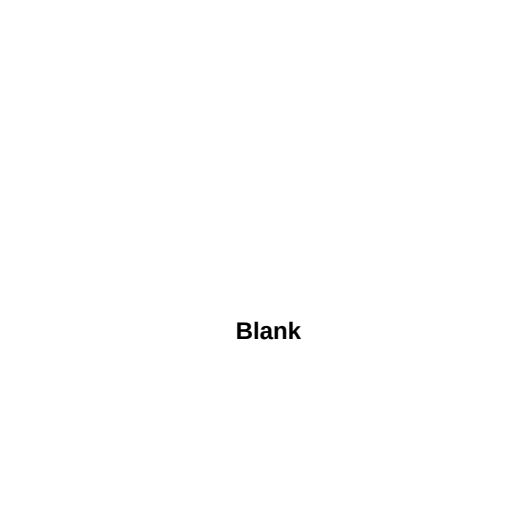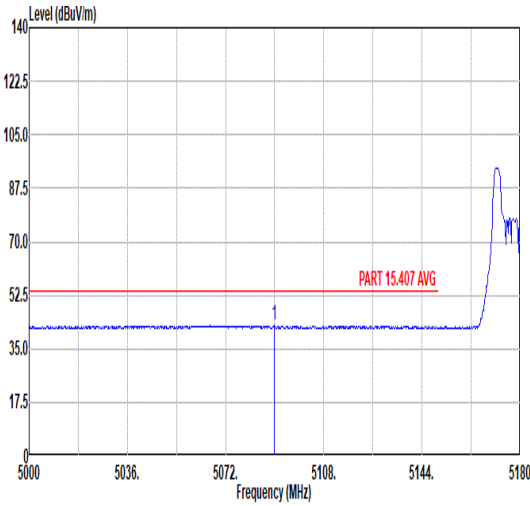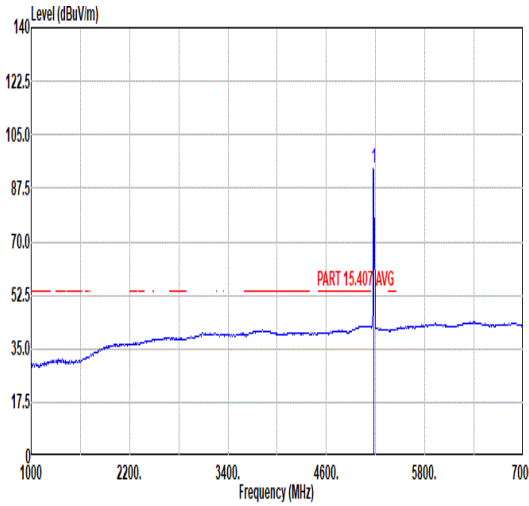

Mode	12																																																																																										
	Band Edge																																																																																										
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Partial_RU26/0_5180MHz																																																																																										
ANT	1																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5145.44</td><td>52.73</td><td>74.00</td><td>-21.27</td><td>40.08</td><td>34.95</td><td>9.95</td><td>32.25</td><td>103</td><td>33</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5145.44	52.73	74.00	-21.27	40.08	34.95	9.95	32.25	103	33	PEAK																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5145.44	52.73	74.00	-21.27	40.08	34.95	9.95	32.25	103	33	PEAK																																																																																
Avg																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5089.82</td><td>42.57</td><td>54.00</td><td>-11.43</td><td>30.01</td><td>34.89</td><td>9.92</td><td>32.25</td><td>103</td><td>33</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5089.82	42.57	54.00	-11.43	30.01	34.89	9.92	32.25	103	33	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>93.93</td><td>-----</td><td>-----</td><td>81.22</td><td>34.97</td><td>9.97</td><td>32.23</td><td>103</td><td>33</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	93.93	-----	-----	81.22	34.97	9.97	32.23	103	33
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5089.82	42.57	54.00	-11.43	30.01	34.89	9.92	32.25	103	33	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5180.00	93.93	-----	-----	81.22	34.97	9.97	32.23	103	33	AVERAGE																																																																																

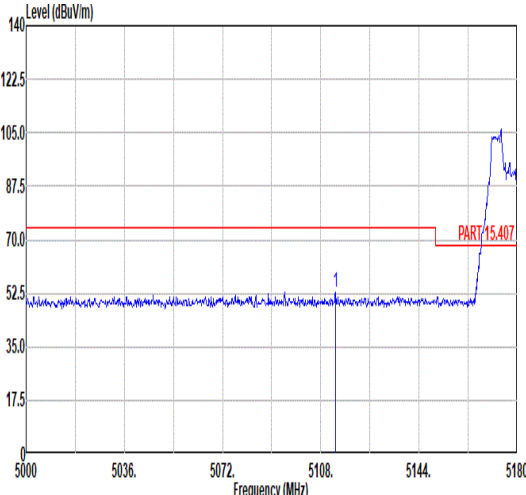
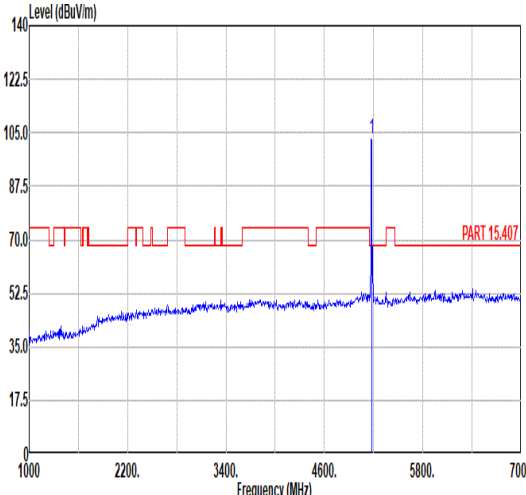
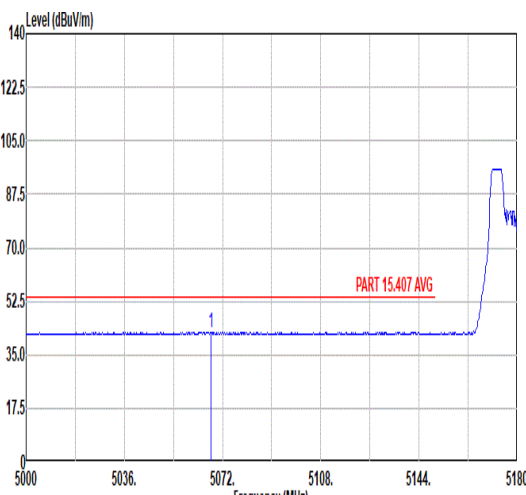
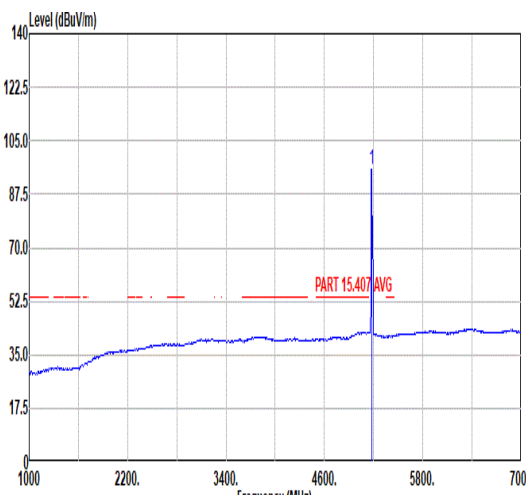


Mode	13																																																																																										
	Band Edge																																																																																										
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Partial_RU52/37_5180MHz																																																																																										
ANT	1																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5113.40</td><td>52.90</td><td>74.00</td><td>-21.10</td><td>40.30</td><td>34.92</td><td>9.93</td><td>32.25</td><td>100</td><td>120</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5113.40	52.90	74.00	-21.10	40.30	34.92	9.93	32.25	100	120	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>103.28</td><td>-----</td><td>-----</td><td>90.57</td><td>34.97</td><td>9.97</td><td>32.23</td><td>100</td><td>120</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	103.28	-----	-----	90.57	34.97	9.97	32.23	100	120
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5113.40	52.90	74.00	-21.10	40.30	34.92	9.93	32.25	100	120	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5180.00	103.28	-----	-----	90.57	34.97	9.97	32.23	100	120	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5067.68</td><td>42.34</td><td>54.00</td><td>-11.66</td><td>29.83</td><td>34.87</td><td>9.90</td><td>32.26</td><td>100</td><td>120</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5067.68	42.34	54.00	-11.66	29.83	34.87	9.90	32.26	100	120	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>95.66</td><td>-----</td><td>-----</td><td>82.95</td><td>34.97</td><td>9.97</td><td>32.23</td><td>100</td><td>120</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	95.66	-----	-----	82.95	34.97	9.97	32.23	100	120
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5067.68	42.34	54.00	-11.66	29.83	34.87	9.90	32.26	100	120	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5180.00	95.66	-----	-----	82.95	34.97	9.97	32.23	100	120	AVERAGE																																																																																







Mode	13																																																		
	Band Edge																																																		
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Partial_RU52/37_5180MHz																																																		
ANT	1																																																		
Pol.	Vertical																																																		
Peak																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5052.38</td><td>52.30</td><td>74.00</td><td>-21.70</td><td>39.81</td><td>34.86</td><td>9.89</td><td>32.26</td><td>100</td><td>112</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5052.38	52.30	74.00	-21.70	39.81	34.86	9.89	32.26	100	112	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																										
1	5052.38	52.30	74.00	-21.70	39.81	34.86	9.89	32.26	100	112	PEAK																																								
Fundamental																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>102.53</td><td>-----</td><td>-----</td><td>89.82</td><td>34.97</td><td>9.97</td><td>32.23</td><td>100</td><td>112</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5180.00	102.53	-----	-----	89.82	34.97	9.97	32.23	100	112	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																										
1	5180.00	102.53	-----	-----	89.82	34.97	9.97	32.23	100	112	PEAK																																								
Avg																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5063.36</td><td>42.47</td><td>54.00</td><td>-11.53</td><td>29.96</td><td>34.87</td><td>9.90</td><td>32.26</td><td>100</td><td>112</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5063.36	42.47	54.00	-11.53	29.96	34.87	9.90	32.26	100	112	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																										
1	5063.36	42.47	54.00	-11.53	29.96	34.87	9.90	32.26	100	112	AVERAGE																																								
AVERAGE																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>94.69</td><td>-----</td><td>-----</td><td>81.98</td><td>34.97</td><td>9.97</td><td>32.23</td><td>100</td><td>112</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5180.00	94.69	-----	-----	81.98	34.97	9.97	32.23	100	112	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																										
1	5180.00	94.69	-----	-----	81.98	34.97	9.97	32.23	100	112	AVERAGE																																								

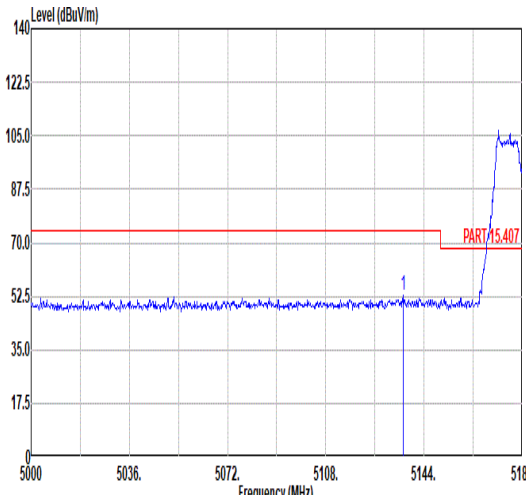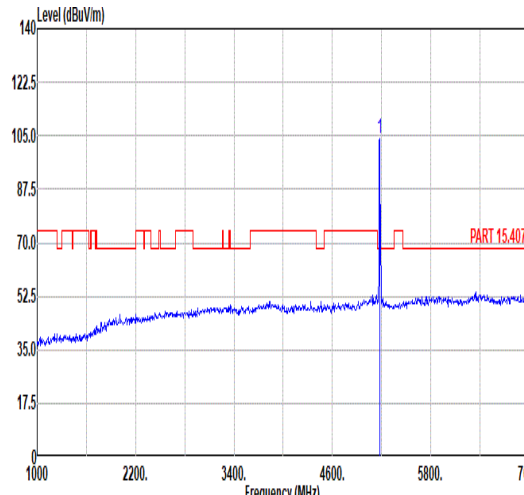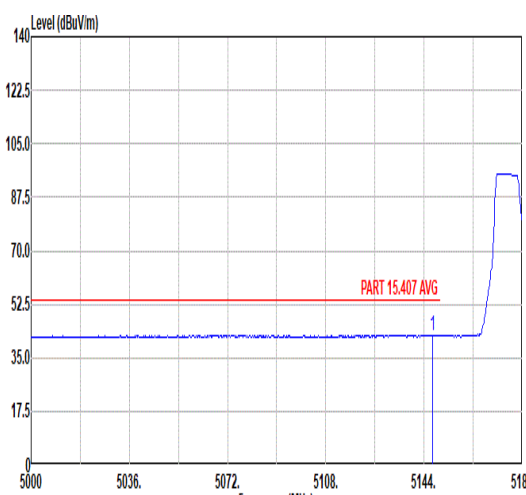
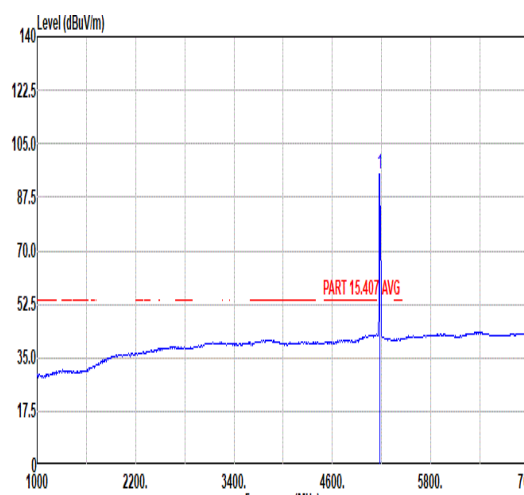


Mode	14																																																			
	Band Edge																																																			
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Partial_RU106/53_5180MHz																																																			
ANT	1																																																			
Pol.	Horizontal																																																			
Peak																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5136.26</td><td>52.64</td><td>74.00</td><td>-21.36</td><td>40.00</td><td>34.94</td><td>9.95</td><td>32.25</td><td>101</td><td>121</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5136.26	52.64	74.00	-21.36	40.00	34.94	9.95	32.25	101	121	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5136.26	52.64	74.00	-21.36	40.00	34.94	9.95	32.25	101	121	PEAK																																									
Fundamental																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>103.99</td><td>-----</td><td>-----</td><td>91.26</td><td>34.98</td><td>9.97</td><td>32.22</td><td>101</td><td>121</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	103.99	-----	-----	91.26	34.98	9.97	32.22	101	121	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5180.00	103.99	-----	-----	91.26	34.98	9.97	32.22	101	121	PEAK																																									
Avg																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.06</td><td>42.46</td><td>54.00</td><td>-11.54</td><td>29.81</td><td>34.95</td><td>9.95</td><td>32.25</td><td>101</td><td>121</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.06	42.46	54.00	-11.54	29.81	34.95	9.95	32.25	101	121	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5147.06	42.46	54.00	-11.54	29.81	34.95	9.95	32.25	101	121	AVERAGE																																									
AVERAGE																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>95.14</td><td>-----</td><td>-----</td><td>82.43</td><td>34.97</td><td>9.97</td><td>32.23</td><td>101</td><td>121</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	95.14	-----	-----	82.43	34.97	9.97	32.23	101	121	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																										
1	5180.00	95.14	-----	-----	82.43	34.97	9.97	32.23	101	121	AVERAGE																																									

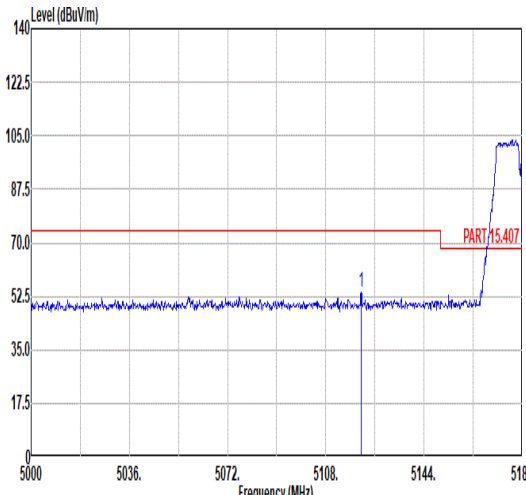
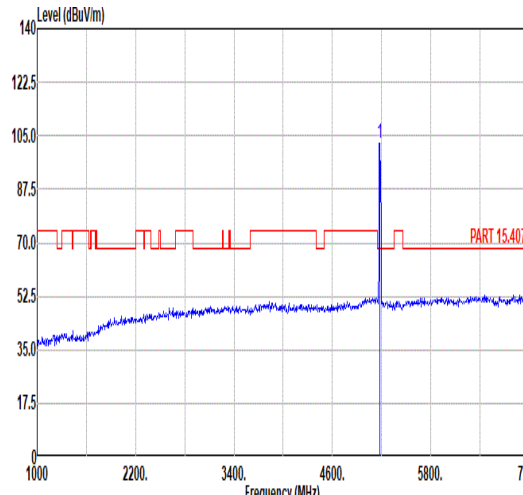
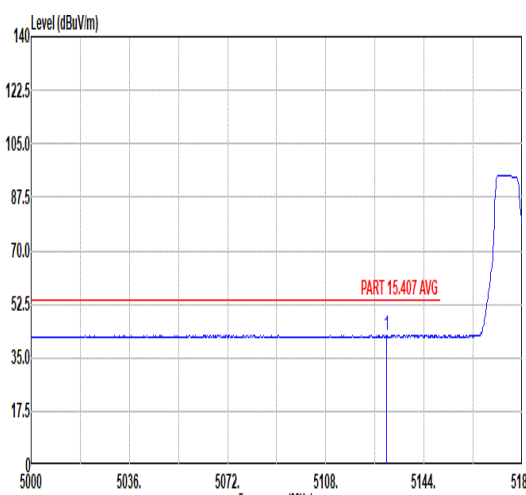
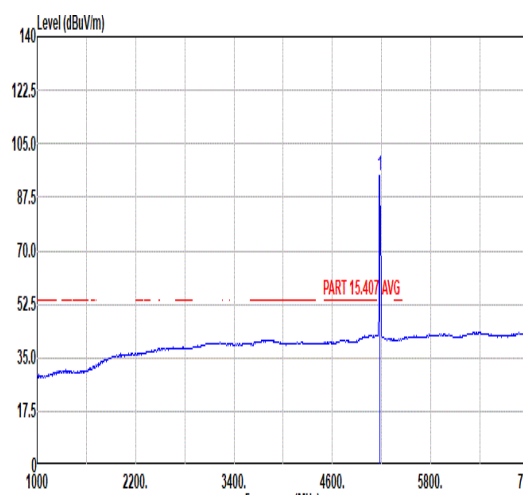


Mode	14																																																																																												
	Band Edge																																																																																												
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Partial_RU106/53_5180MHz																																																																																												
ANT	1																																																																																												
Pol.	Vertical					Fundamental																																																																																							
Peak																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5120.96</td><td>53.70</td><td>74.00</td><td>-20.30</td><td>41.09</td><td>34.92</td><td>9.94</td><td>32.25</td><td>100</td><td>112</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5120.96	53.70	74.00	-20.30	41.09	34.92	9.94	32.25	100	112	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5180.00</td><td>102.71</td><td>-----</td><td>-----</td><td>90.00</td><td>34.97</td><td>9.97</td><td>32.23</td><td>100</td><td>112</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5180.00	102.71	-----	-----	90.00	34.97	9.97	32.23	100	112
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5120.96	53.70	74.00	-20.30	41.09	34.92	9.94	32.25	100	112	PEAK																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5180.00	102.71	-----	-----	90.00	34.97	9.97	32.23	100	112	PEAK																																																																																		
Avg																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5130.32</td><td>42.33</td><td>54.00</td><td>-11.67</td><td>29.71</td><td>34.93</td><td>9.94</td><td>32.25</td><td>100</td><td>112</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5130.32	42.33	54.00	-11.67	29.71	34.93	9.94	32.25	100	112	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5180.00</td><td>94.67</td><td>-----</td><td>-----</td><td>81.94</td><td>34.98</td><td>9.97</td><td>32.22</td><td>100</td><td>112</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5180.00	94.67	-----	-----	81.94	34.98	9.97	32.22	100	112
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5130.32	42.33	54.00	-11.67	29.71	34.93	9.94	32.25	100	112	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor			Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5180.00	94.67	-----	-----	81.94	34.98	9.97	32.22	100	112	AVERAGE																																																																																		

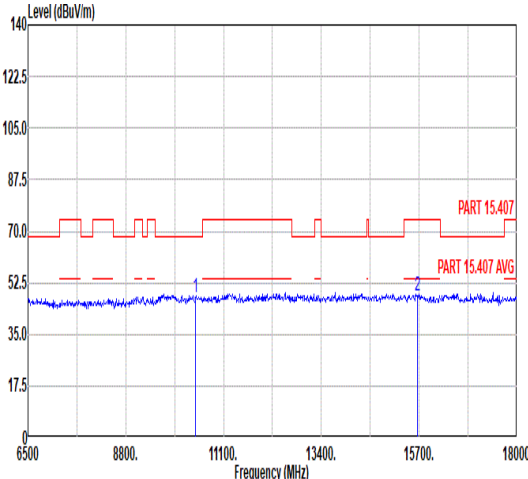
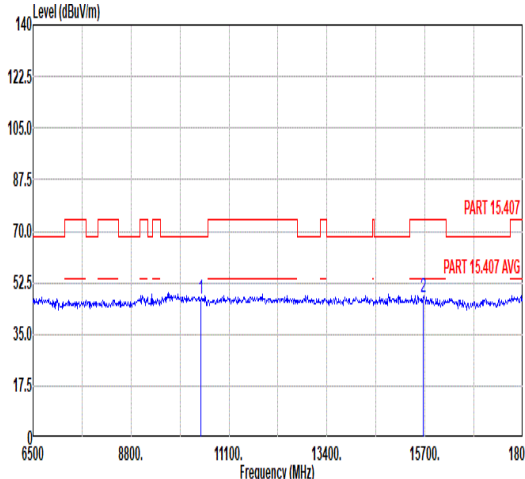


Mode	15																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																																																																																																			
ANT	1																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>47.29</td><td>68.30</td><td>-21.01</td><td>56.39</td><td>37.26</td><td>13.30</td><td>59.66</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.89</td><td>74.00</td><td>-26.11</td><td>49.89</td><td>40.30</td><td>15.85</td><td>58.15</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	47.29	68.30	-21.01	56.39	37.26	13.30	59.66	--	--	Peak	2	15660.00	47.89	74.00	-26.11	49.89	40.30	15.85	58.15	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>46.77</td><td>68.30</td><td>-21.53</td><td>55.87</td><td>37.26</td><td>13.30</td><td>59.66</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.28</td><td>74.00</td><td>-26.72</td><td>49.28</td><td>40.30</td><td>15.85</td><td>58.15</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	46.77	68.30	-21.53	55.87	37.26	13.30	59.66	--	--	Peak	2	15660.00	47.28	74.00	-26.72	49.28	40.30	15.85	58.15	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10440.00	47.29	68.30	-21.01	56.39	37.26	13.30	59.66	--	--	Peak																																																																																																									
2	15660.00	47.89	74.00	-26.11	49.89	40.30	15.85	58.15	--	--	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10440.00	46.77	68.30	-21.53	55.87	37.26	13.30	59.66	--	--	Peak																																																																																																									
2	15660.00	47.28	74.00	-26.72	49.28	40.30	15.85	58.15	--	--	Peak																																																																																																									

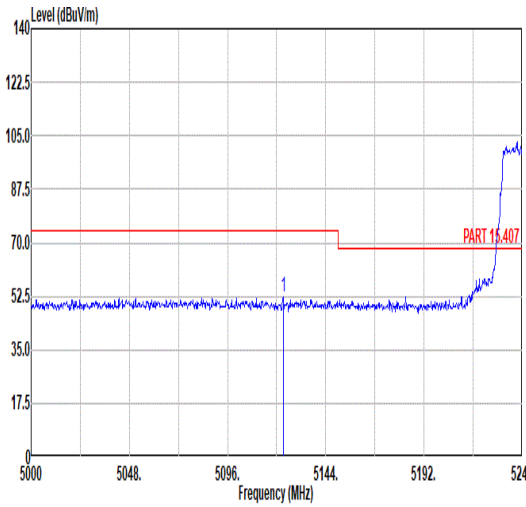
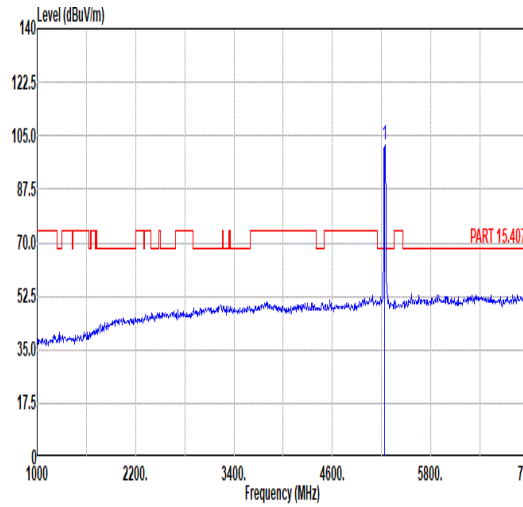
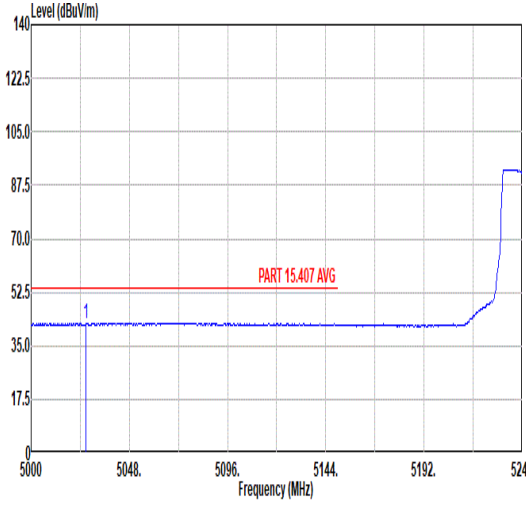
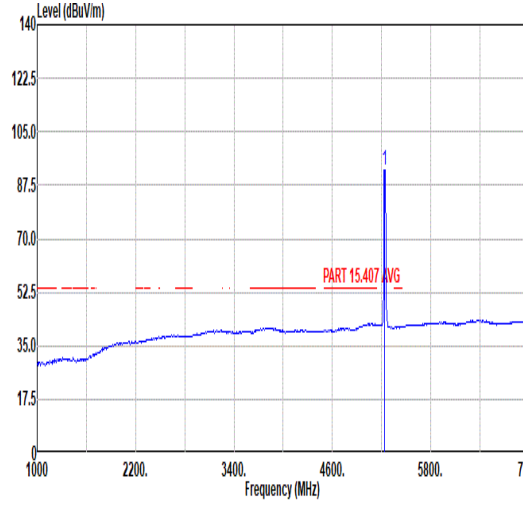


Mode	16																																																																																									
	Band Edge - L																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5123.12</td><td>52.07</td><td>74.00</td><td>-21.93</td><td>39.45</td><td>34.93</td><td>9.94</td><td>32.25</td><td>281</td><td>135</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5123.12	52.07	74.00	-21.93	39.45	34.93	9.94	32.25	281	135	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>102.13</td><td>-----</td><td>-----</td><td>89.17</td><td>35.10</td><td>10.06</td><td>32.20</td><td>281</td><td>135</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	102.13	-----	-----	89.17	35.10	10.06	32.20	281	135
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5123.12	52.07	74.00	-21.93	39.45	34.93	9.94	32.25	281	135	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5240.00	102.13	-----	-----	89.17	35.10	10.06	32.20	281	135	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5026.88</td><td>42.50</td><td>54.00</td><td>-11.50</td><td>30.06</td><td>34.83</td><td>9.87</td><td>32.26</td><td>281</td><td>135</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5026.88	42.50	54.00	-11.50	30.06	34.83	9.87	32.26	281	135	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>92.71</td><td>-----</td><td>-----</td><td>79.75</td><td>35.10</td><td>10.06</td><td>32.20</td><td>281</td><td>135</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	92.71	-----	-----	79.75	35.10	10.06	32.20	281	135
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5026.88	42.50	54.00	-11.50	30.06	34.83	9.87	32.26	281	135	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5240.00	92.71	-----	-----	79.75	35.10	10.06	32.20	281	135	AVERAGE																																																																															

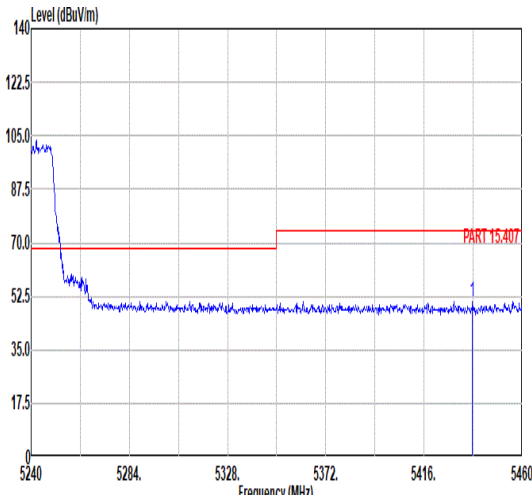
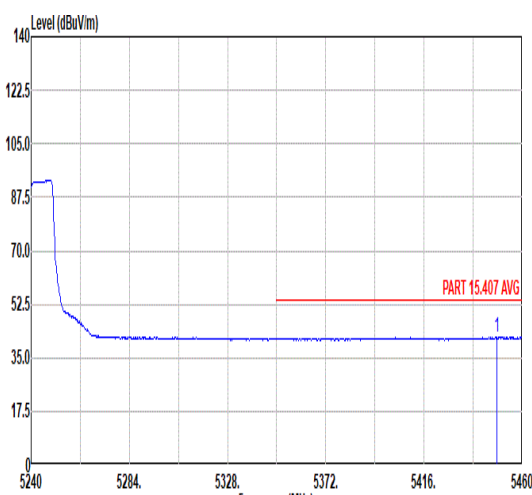


Mode	16																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																		
ANT	1																																																		
Pol.	Horizontal							Fundamental																																											
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5437.78</td><td>50.88</td><td>74.00</td><td>-23.12</td><td>37.62</td><td>35.20</td><td>10.29</td><td>32.23</td><td>281</td><td>135</td><td>PEAK</td></tr></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5437.78	50.88	74.00	-23.12	37.62	35.20	10.29	32.23	281	135	PEAK	Blank			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5437.78	50.88	74.00	-23.12	37.62	35.20	10.29	32.23	281	135	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5448.56</td><td>41.82</td><td>54.00</td><td>-12.18</td><td>28.58</td><td>35.20</td><td>10.29</td><td>32.25</td><td>281</td><td>135</td><td>AVERAGE</td></tr></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5448.56	41.82	54.00	-12.18	28.58	35.20	10.29	32.25	281	135	AVERAGE	Blank			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5448.56	41.82	54.00	-12.18	28.58	35.20	10.29	32.25	281	135	AVERAGE																																								

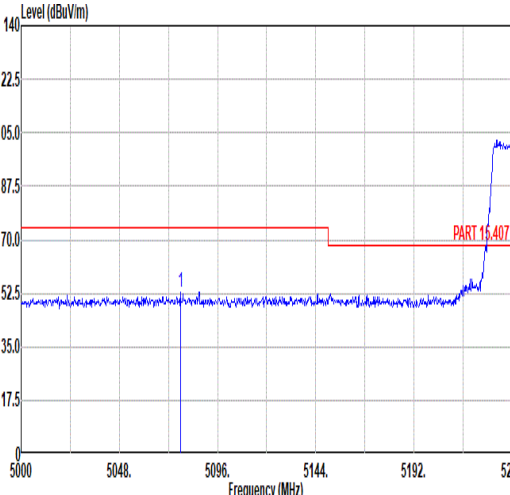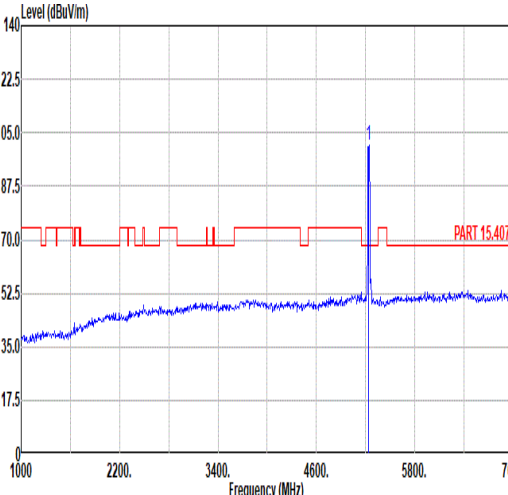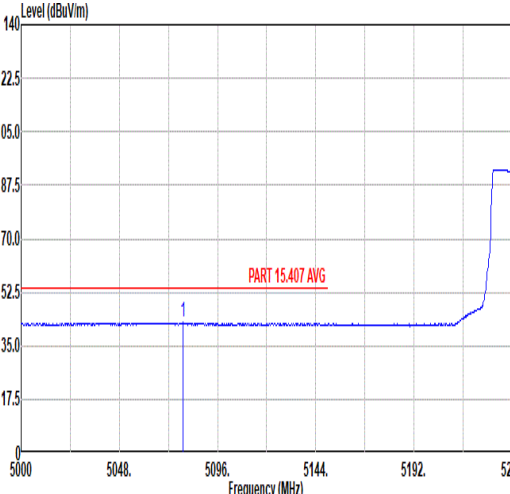
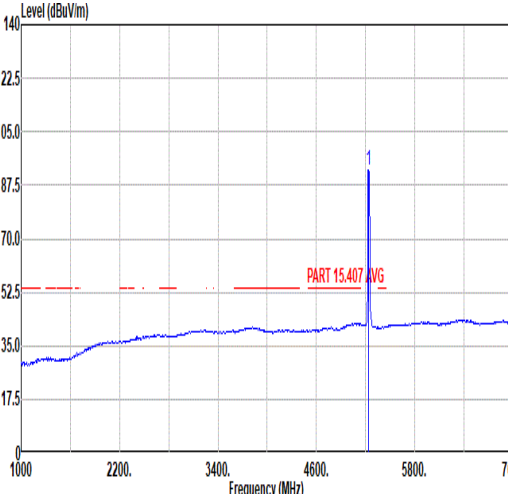


Mode	16																																																																																			
	Band Edge - L																																																																																			
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																																																			
ANT	1																																																																																			
Pol.	Vertical						Fundamental																																																																													
Peak																																																																																				
		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5077.76	52.77	74.00	-21.23	40.23	34.88	9.91	32.25	182	14	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>100.81</td><td>-----</td><td>-----</td><td>87.88</td><td>35.08</td><td>10.05</td><td>32.20</td><td>182</td><td>14</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	100.81	-----	-----	87.88	35.08	10.05	32.20	182	14
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																											
1	5077.76	52.77	74.00	-21.23	40.23	34.88	9.91	32.25	182	14	PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																											
1	5240.00	100.81	-----	-----	87.88	35.08	10.05	32.20	182	14	PEAK																																																																									
Avg																																																																																				
		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5078.96	42.55	54.00	-11.45	30.01	34.88	9.91	32.25	182	14	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>92.36</td><td>-----</td><td>-----</td><td>79.46</td><td>35.06</td><td>10.04</td><td>32.20</td><td>182</td><td>14</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	92.36	-----	-----	79.46	35.06	10.04	32.20	182	14
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																											
1	5078.96	42.55	54.00	-11.45	30.01	34.88	9.91	32.25	182	14	AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																											
1	5240.00	92.36	-----	-----	79.46	35.06	10.04	32.20	182	14	AVERAGE																																																																									



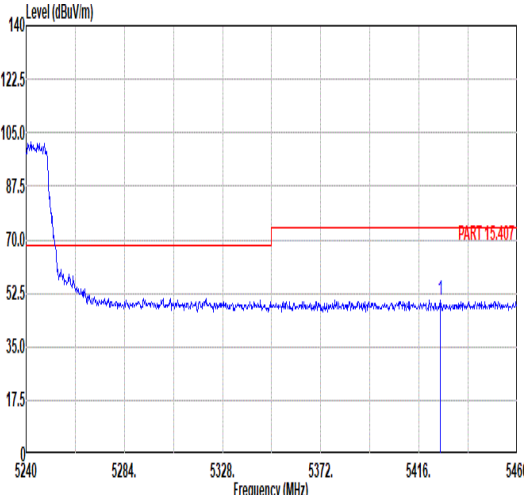
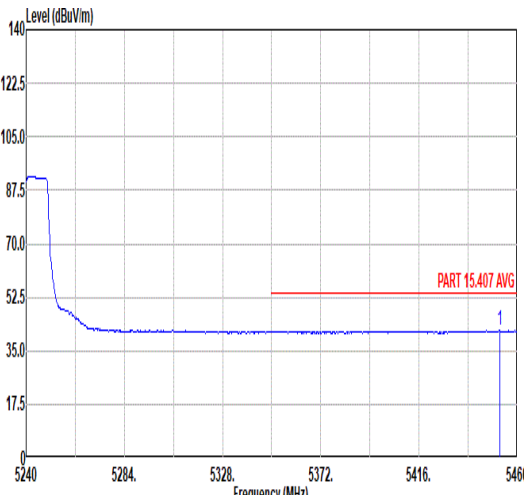


Mode	16																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																		
ANT	1																																																		
Pol.	Vertical						Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5425.68</td><td>50.28</td><td>74.00</td><td>-23.72</td><td>37.01</td><td>35.20</td><td>10.29</td><td>32.22</td><td>182</td><td>14</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5425.68	50.28	74.00	-23.72	37.01	35.20	10.29	32.22	182	14	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5425.68	50.28	74.00	-23.72	37.01	35.20	10.29	32.22	182	14	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5452.08</td><td>41.64</td><td>54.00</td><td>-12.36</td><td>28.41</td><td>35.20</td><td>10.29</td><td>32.26</td><td>182</td><td>14</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5452.08	41.64	54.00	-12.36	28.41	35.20	10.29	32.26	182	14	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5452.08	41.64	54.00	-12.36	28.41	35.20	10.29	32.26	182	14	AVERAGE																																								

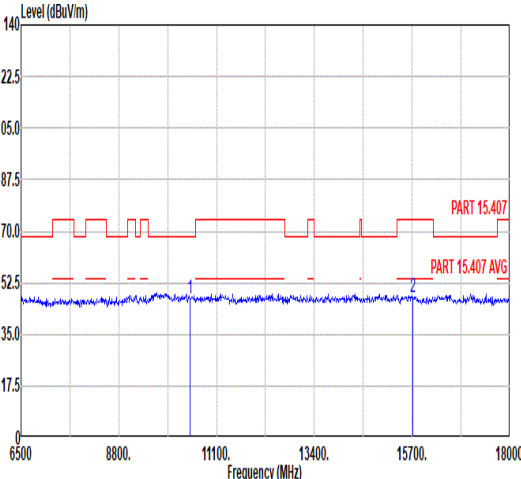
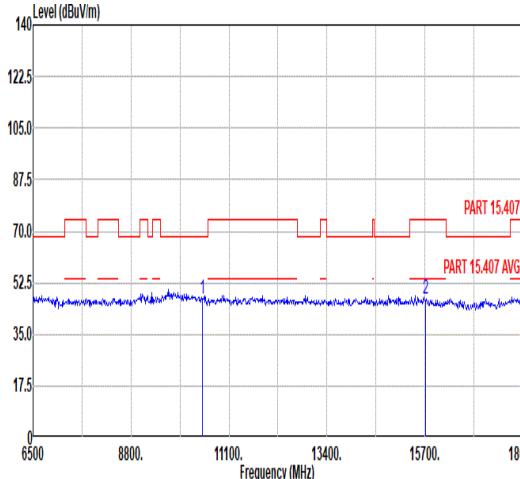


Mode	16																																																															
	Harmonic																																																															
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																															
ANT	1																																																															
Pol.	Horizontal						Vertical																																																									
Peak Avg																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>47.19</td><td>68.30</td><td>-21.11</td><td>56.23</td><td>37.29</td><td>13.36</td><td>59.69</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>47.64</td><td>74.00</td><td>-26.36</td><td>49.72</td><td>40.33</td><td>15.87</td><td>58.28</td><td>--</td><td>--</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	47.19	68.30	-21.11	56.23	37.29	13.36	59.69	--	--	Peak	2	15720.00	47.64	74.00	-26.36	49.72	40.33	15.87	58.28	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																						
1	10480.00	47.19	68.30	-21.11	56.23	37.29	13.36	59.69	--	--	Peak																																																					
2	15720.00	47.64	74.00	-26.36	49.72	40.33	15.87	58.28	--	--	Peak																																																					
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>47.22</td><td>68.30</td><td>-21.08</td><td>56.26</td><td>37.29</td><td>13.36</td><td>59.69</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>46.99</td><td>74.00</td><td>-27.01</td><td>49.07</td><td>40.33</td><td>15.87</td><td>58.28</td><td>--</td><td>--</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	47.22	68.30	-21.08	56.26	37.29	13.36	59.69	--	--	Peak	2	15720.00	46.99	74.00	-27.01	49.07	40.33	15.87	58.28	--	--	Peak	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																						
1	10480.00	47.22	68.30	-21.08	56.26	37.29	13.36	59.69	--	--	Peak																																																					
2	15720.00	46.99	74.00	-27.01	49.07	40.33	15.87	58.28	--	--	Peak																																																					

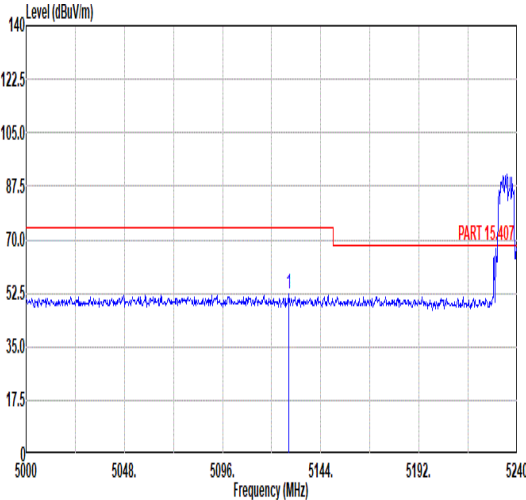
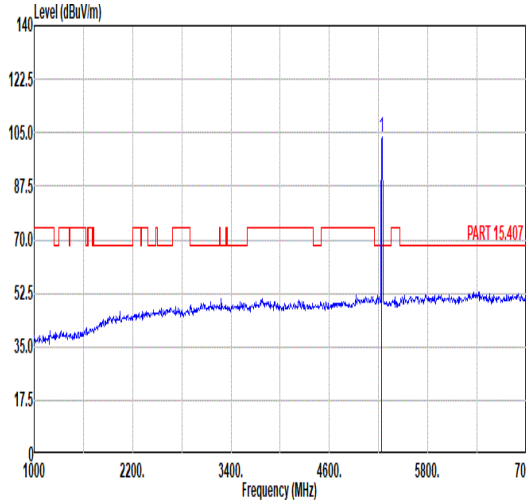
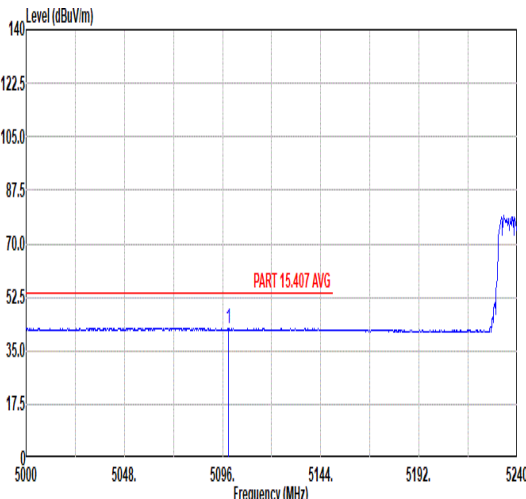
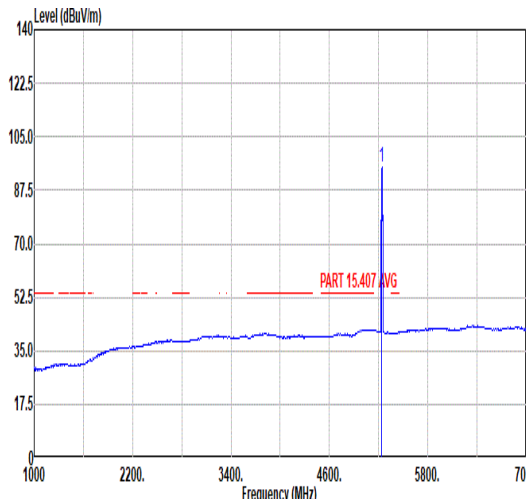


Mode	17																																																		
	Band Edge - L																																																		
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Partial_RU26/8_5240MHz																																																		
ANT	1																																																		
Pol.	Horizontal																																																		
Peak																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5128.16</td><td>52.54</td><td>74.00</td><td>-21.46</td><td>39.92</td><td>34.93</td><td>9.94</td><td>32.25</td><td>393</td><td>128</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5128.16	52.54	74.00	-21.46	39.92	34.93	9.94	32.25	393	128	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5128.16	52.54	74.00	-21.46	39.92	34.93	9.94	32.25	393	128	PEAK																																								
Fundamental																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>103.32</td><td>-----</td><td>-----</td><td>90.36</td><td>35.10</td><td>10.06</td><td>32.20</td><td>393</td><td>128</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	103.32	-----	-----	90.36	35.10	10.06	32.20	393	128	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5240.00	103.32	-----	-----	90.36	35.10	10.06	32.20	393	128	PEAK																																								
Avg																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5098.88</td><td>42.50</td><td>54.00</td><td>-11.50</td><td>29.93</td><td>34.90</td><td>9.92</td><td>32.25</td><td>393</td><td>128</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5098.88	42.50	54.00	-11.50	29.93	34.90	9.92	32.25	393	128	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5098.88	42.50	54.00	-11.50	29.93	34.90	9.92	32.25	393	128	AVERAGE																																								
Fundamental																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>95.30</td><td>-----</td><td>-----</td><td>82.34</td><td>35.10</td><td>10.06</td><td>32.20</td><td>393</td><td>128</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	95.30	-----	-----	82.34	35.10	10.06	32.20	393	128	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5240.00	95.30	-----	-----	82.34	35.10	10.06	32.20	393	128	AVERAGE																																								

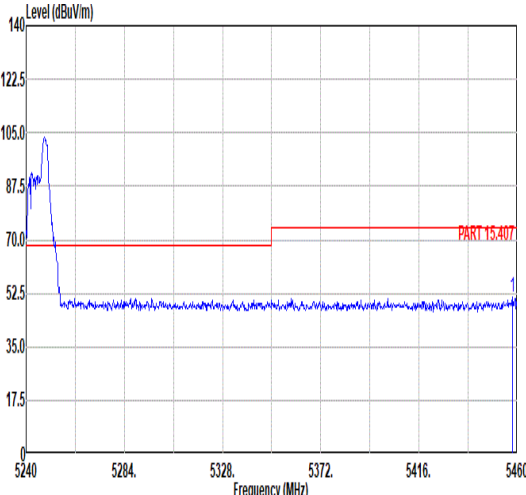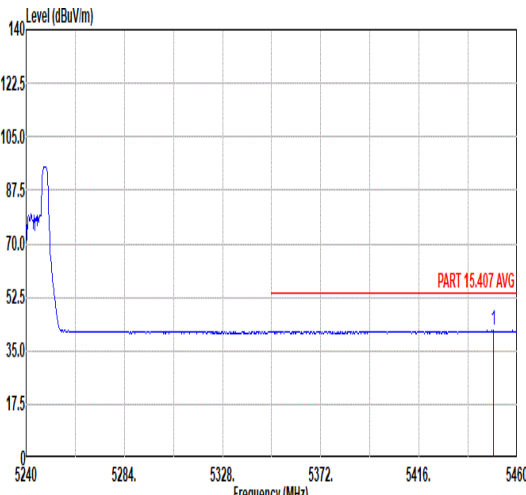

Mode	17																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Partial_RU26/8_5240MHz																																																		
ANT	1																																																		
Pol.	Horizontal							Fundamental																																											
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.02</td><td>51.21</td><td>74.00</td><td>-22.79</td><td>37.97</td><td>35.20</td><td>10.30</td><td>32.26</td><td>393</td><td>128</td><td>PEAK</td></tr></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5458.02	51.21	74.00	-22.79	37.97	35.20	10.30	32.26	393	128	PEAK	Blank			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5458.02	51.21	74.00	-22.79	37.97	35.20	10.30	32.26	393	128	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5449.44</td><td>41.58</td><td>54.00</td><td>-12.42</td><td>28.34</td><td>35.20</td><td>10.29</td><td>32.25</td><td>393</td><td>128</td><td>AVERAGE</td></tr></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5449.44	41.58	54.00	-12.42	28.34	35.20	10.29	32.25	393	128	AVERAGE	Blank			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5449.44	41.58	54.00	-12.42	28.34	35.20	10.29	32.25	393	128	AVERAGE																																								

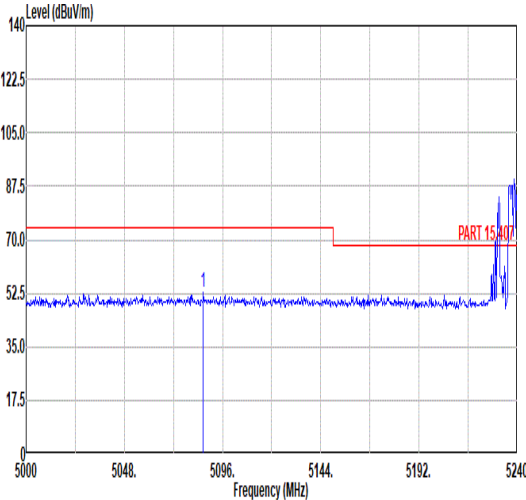
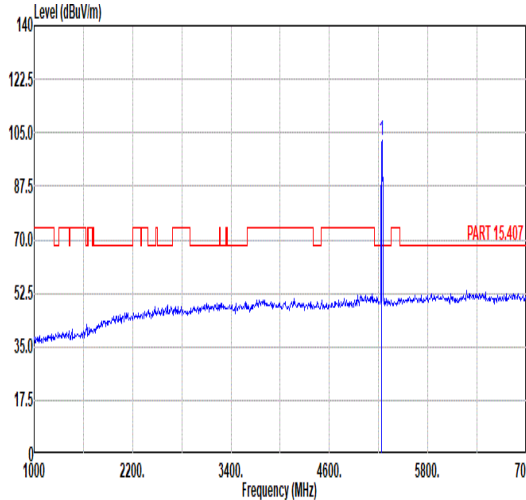
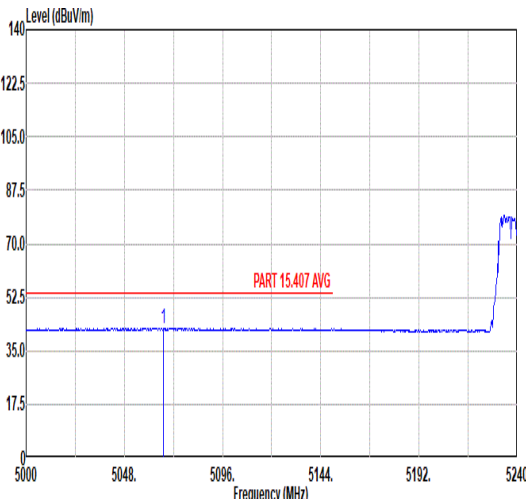
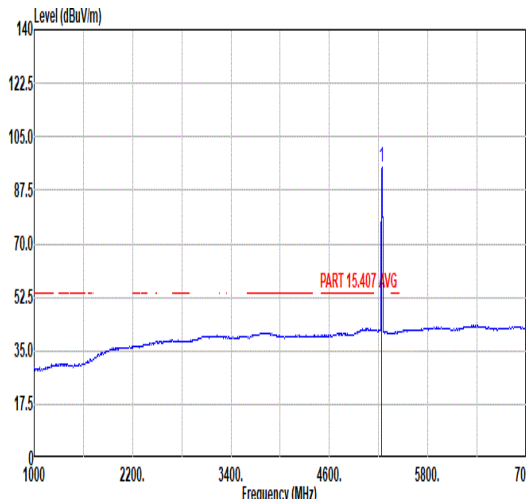


Mode	17																																																		
	Band Edge - L																																																		
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Partial_RU26/8_5240MHz																																																		
ANT	1																																																		
Pol.	Vertical																																																		
Peak																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5086.64</td><td>52.89</td><td>74.00</td><td>-21.11</td><td>40.34</td><td>34.89</td><td>9.91</td><td>32.25</td><td>115</td><td>116</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5086.64	52.89	74.00	-21.11	40.34	34.89	9.91	32.25	115	116
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	5086.64	52.89	74.00	-21.11	40.34	34.89	9.91	32.25	115	116	PEAK																																								
Fundamental																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>102.45</td><td>-----</td><td>-----</td><td>89.49</td><td>35.10</td><td>10.06</td><td>32.20</td><td>115</td><td>116</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	102.45	-----	-----	89.49	35.10	10.06	32.20	115	116
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	5240.00	102.45	-----	-----	89.49	35.10	10.06	32.20	115	116	PEAK																																								
Avg																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5067.20</td><td>42.33</td><td>54.00</td><td>-11.67</td><td>29.82</td><td>34.87</td><td>9.90</td><td>32.26</td><td>115</td><td>116</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5067.20	42.33	54.00	-11.67	29.82	34.87	9.90	32.26	115	116
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	5067.20	42.33	54.00	-11.67	29.82	34.87	9.90	32.26	115	116	AVERAGE																																								
Fundamental																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>94.83</td><td>-----</td><td>-----</td><td>81.87</td><td>35.10</td><td>10.06</td><td>32.20</td><td>115</td><td>116</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	94.83	-----	-----	81.87	35.10	10.06	32.20	115	116
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	5240.00	94.83	-----	-----	81.87	35.10	10.06	32.20	115	116	AVERAGE																																								





Mode	17																																																
	Band Edge - R																																																
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Partial_RU26/8_5240MHz																																																
ANT	1																																																
Pol.	Vertical					Fundamental																																											
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5409.84</td><td>51.03</td><td>74.00</td><td>-22.97</td><td>37.73</td><td>35.20</td><td>10.29</td><td>32.19</td><td>115</td><td>116 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5409.84	51.03	74.00	-22.97	37.73	35.20	10.29	32.19	115	116 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																								
1	5409.84	51.03	74.00	-22.97	37.73	35.20	10.29	32.19	115	116 PEAK																																							
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5446.36</td><td>41.52</td><td>54.00</td><td>-12.48</td><td>28.28</td><td>35.20</td><td>10.29</td><td>32.25</td><td>115</td><td>116 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5446.36	41.52	54.00	-12.48	28.28	35.20	10.29	32.25	115	116 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																								
1	5446.36	41.52	54.00	-12.48	28.28	35.20	10.29	32.25	115	116 AVERAGE																																							

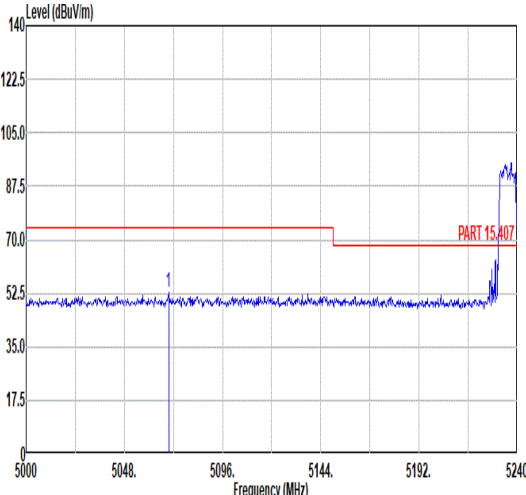
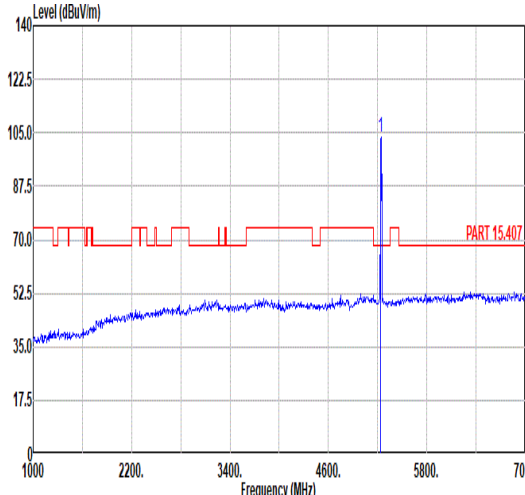
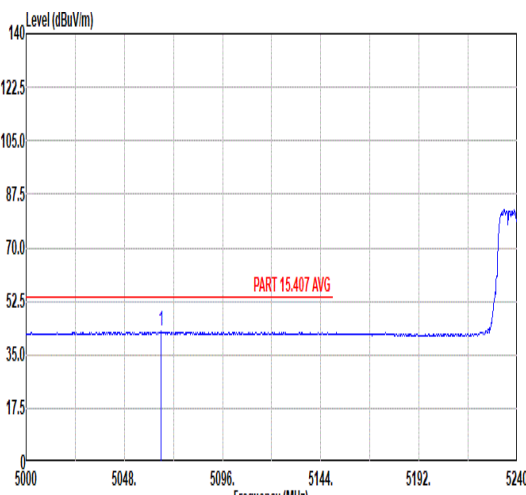
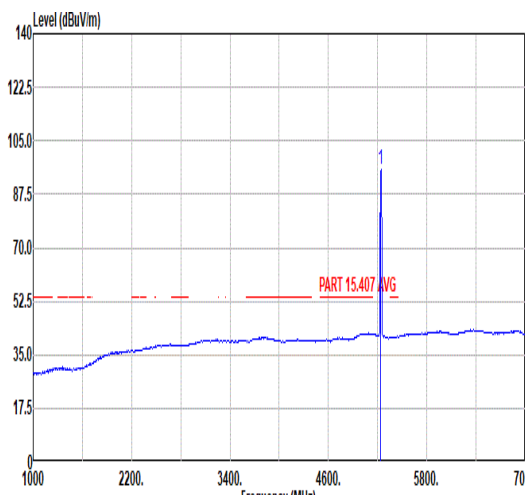


Mode	18																																																																																									
	Band Edge - L																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Partial_RU52/40_5240MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5069.60</td><td>52.68</td><td>74.00</td><td>-21.32</td><td>40.17</td><td>34.87</td><td>9.90</td><td>32.26</td><td>393</td><td>125</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5069.60	52.68	74.00	-21.32	40.17	34.87	9.90	32.26	393	125	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>103.37</td><td>-----</td><td>-----</td><td>90.41</td><td>35.10</td><td>10.06</td><td>32.20</td><td>393</td><td>125</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	103.37	-----	-----	90.41	35.10	10.06	32.20	393	125
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5069.60	52.68	74.00	-21.32	40.17	34.87	9.90	32.26	393	125	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5240.00	103.37	-----	-----	90.41	35.10	10.06	32.20	393	125	PEAK																																																																															
Avg																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5066.00</td><td>42.54</td><td>54.00</td><td>-11.46</td><td>30.03</td><td>34.87</td><td>9.90</td><td>32.26</td><td>393</td><td>125</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5066.00	42.54	54.00	-11.46	30.03	34.87	9.90	32.26	393	125	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>95.61</td><td>-----</td><td>-----</td><td>82.65</td><td>35.10</td><td>10.06</td><td>32.20</td><td>393</td><td>125</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	95.61	-----	-----	82.65	35.10	10.06	32.20	393	125
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5066.00	42.54	54.00	-11.46	30.03	34.87	9.90	32.26	393	125	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5240.00	95.61	-----	-----	82.65	35.10	10.06	32.20	393	125	AVERAGE																																																																															

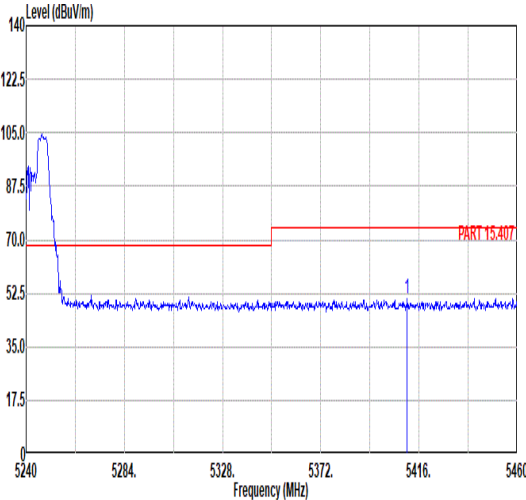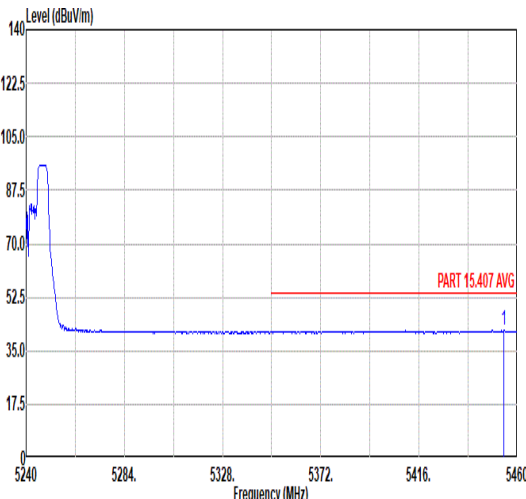

Mode	18																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Partial_RU52/40_5240MHz																																																		
ANT	1																																																		
Pol.	Horizontal						Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5410.72</td><td>50.91</td><td>74.00</td><td>-23.09</td><td>37.61</td><td>35.20</td><td>10.29</td><td>32.19</td><td>393</td><td>125</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5410.72	50.91	74.00	-23.09	37.61	35.20	10.29	32.19	393	125	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5410.72	50.91	74.00	-23.09	37.61	35.20	10.29	32.19	393	125	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5454.06</td><td>41.69</td><td>54.00</td><td>-12.31</td><td>28.45</td><td>35.20</td><td>10.30</td><td>32.26</td><td>393</td><td>125</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5454.06	41.69	54.00	-12.31	28.45	35.20	10.30	32.26	393	125	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5454.06	41.69	54.00	-12.31	28.45	35.20	10.30	32.26	393	125	AVERAGE																																								

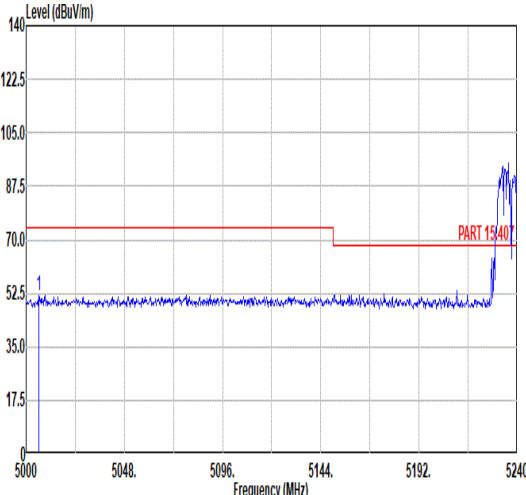
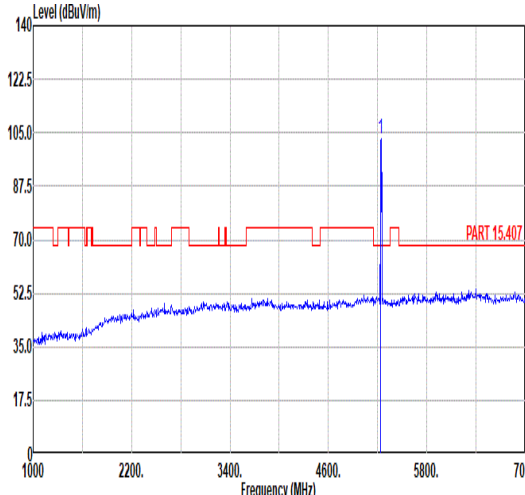
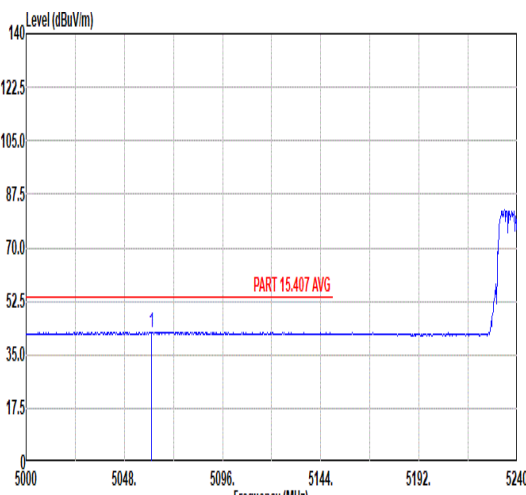
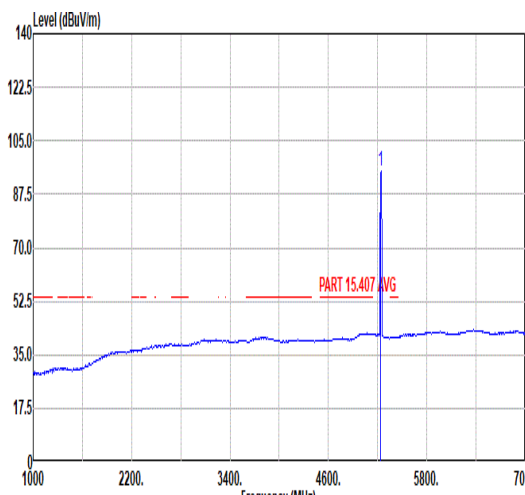


Mode	18																																																																																														
	Band Edge - L																																																																																														
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Partial_RU52/40_5240MHz																																																																																														
ANT	1																																																																																														
Pol.	Vertical						Fundamental																																																																																								
Peak																																																																																															
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq		Level	Line Margin	Level	Factor	Loss Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5006.24	51.84	74.00	-22.16	39.43	34.81	9.86	32.26	115	116	PEAK	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th colspan="2">Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th colspan="2"></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>102.86</td><td>-----</td><td>-----</td><td>89.90</td><td>35.10</td><td>10.06</td><td>32.20</td><td>115</td><td>116</td><td>PEAK</td></tr></table>			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq		Level	Line Margin	Level	Factor	Loss Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	102.86	-----	-----	89.90	35.10	10.06	32.20	115	116	PEAK
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq		Level	Line Margin	Level	Factor	Loss Factor																																																																																									
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5006.24	51.84	74.00	-22.16	39.43	34.81	9.86	32.26	115	116	PEAK																																																																																				
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq		Level	Line Margin	Level	Factor	Loss Factor																																																																																									
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5240.00	102.86	-----	-----	89.90	35.10	10.06	32.20	115	116	PEAK																																																																																				
Avg																																																																																															
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th colspan="2">Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th colspan="2"></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5061.44</td><td>42.29</td><td>54.00</td><td>-11.71</td><td>29.78</td><td>34.87</td><td>9.90</td><td>32.26</td><td>115</td><td>116</td><td>AVERAGE</td></tr></table>			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq		Level	Line Margin	Level	Factor	Loss Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5061.44	42.29	54.00	-11.71	29.78	34.87	9.90	32.26	115	116	AVERAGE	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th colspan="2">Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th colspan="2"></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>95.16</td><td>-----</td><td>-----</td><td>82.20</td><td>35.10</td><td>10.06</td><td>32.20</td><td>115</td><td>116</td><td>AVERAGE</td></tr></table>			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq		Level	Line Margin	Level	Factor	Loss Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	95.16	-----	-----	82.20	35.10	10.06	32.20	115	116
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq		Level	Line Margin	Level	Factor	Loss Factor																																																																																									
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5061.44	42.29	54.00	-11.71	29.78	34.87	9.90	32.26	115	116	AVERAGE																																																																																				
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq		Level	Line Margin	Level	Factor	Loss Factor																																																																																									
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5240.00	95.16	-----	-----	82.20	35.10	10.06	32.20	115	116	AVERAGE																																																																																				



Mode	18																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Partial_RU52/40_5240MHz																																																		
ANT	1																																																		
Pol.	Vertical						Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5438.44</td><td>51.66</td><td>74.00</td><td>-22.34</td><td>38.41</td><td>35.20</td><td>10.29</td><td>32.24</td><td>115</td><td>116</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5438.44	51.66	74.00	-22.34	38.41	35.20	10.29	32.24	115	116	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5438.44	51.66	74.00	-22.34	38.41	35.20	10.29	32.24	115	116	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5438.00</td><td>41.61</td><td>54.00</td><td>-12.39</td><td>28.35</td><td>35.20</td><td>10.29</td><td>32.23</td><td>115</td><td>116</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5438.00	41.61	54.00	-12.39	28.35	35.20	10.29	32.23	115	116	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5438.00	41.61	54.00	-12.39	28.35	35.20	10.29	32.23	115	116	AVERAGE																																								

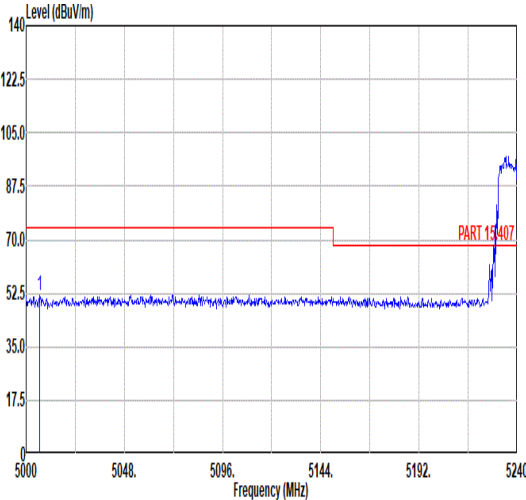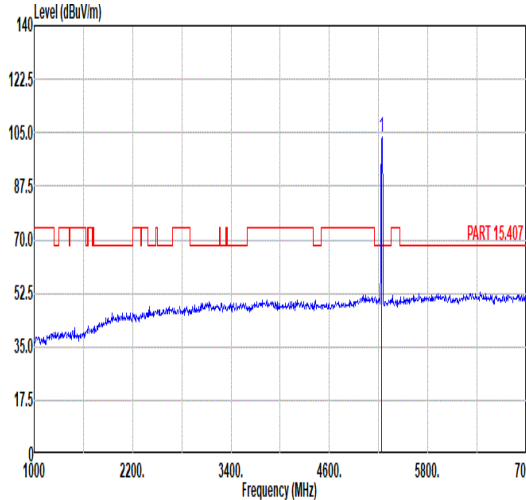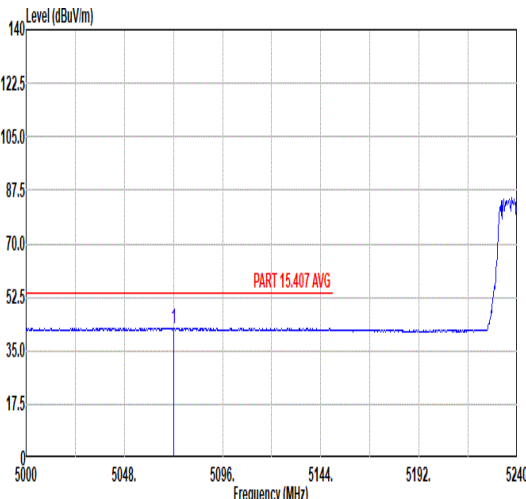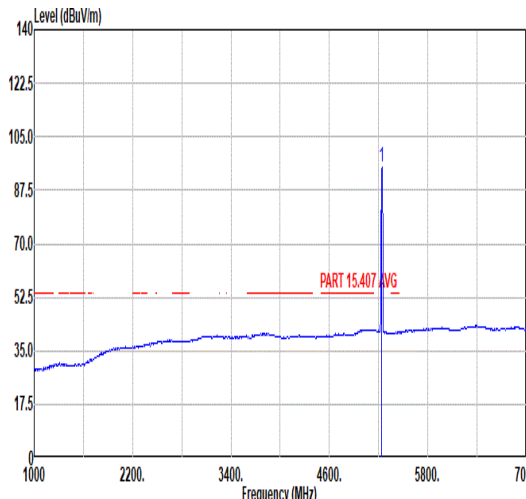

Mode	19																																																	
	Band Edge - L																																																	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Partial_RU106/54_5240MHz																																																	
ANT	1																																																	
Pol.	Horizontal																																																	
Peak																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5006.48</td><td>52.03</td><td>74.00</td><td>-21.97</td><td>39.62</td><td>34.81</td><td>9.86</td><td>32.26</td><td>393</td><td>130</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5006.48	52.03	74.00	-21.97	39.62	34.81	9.86	32.26	393	130
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5006.48	52.03	74.00	-21.97	39.62	34.81	9.86	32.26	393	130	PEAK																																							
Fundamental																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>103.52</td><td>-----</td><td>-----</td><td>90.56</td><td>35.10</td><td>10.06</td><td>32.20</td><td>393</td><td>130</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	103.52	-----	-----	90.56	35.10	10.06	32.20	393	130
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5240.00	103.52	-----	-----	90.56	35.10	10.06	32.20	393	130	PEAK																																							
Avg																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5072.24</td><td>42.45</td><td>54.00</td><td>-11.55</td><td>29.92</td><td>34.88</td><td>9.90</td><td>32.25</td><td>393</td><td>130</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5072.24	42.45	54.00	-11.55	29.92	34.88	9.90	32.25	393	130
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5072.24	42.45	54.00	-11.55	29.92	34.88	9.90	32.25	393	130	AVERAGE																																							
AVERAGE																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>95.26</td><td>-----</td><td>-----</td><td>82.30</td><td>35.10</td><td>10.06</td><td>32.20</td><td>393</td><td>130</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	95.26	-----	-----	82.30	35.10	10.06	32.20	393	130
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5240.00	95.26	-----	-----	82.30	35.10	10.06	32.20	393	130	AVERAGE																																							