



FCC RF Test Report

APPLICANT : Meta Platforms Technologies, LLC
EQUIPMENT : AI Glasses
MODEL NAME : G4QM, G4QR, G4QB, G4QS, G4QL, G4QP, G4QC
FCC ID : 2AG0Z-G4Q
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : May 23, 2026

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Fly Liang

Approved by: Fly Liang



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	7
1.8 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	11
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
3 TEST RESULT	12
3.1 Unwanted Emissions Measurement	12
4 LIST OF MEASURING EQUIPMENT	17
5 MEASUREMENT UNCERTAINTY	18
APPENDIX A. RADIATED SPURIOUS EMISSION	
APPENDIX B. DUTY CYCLE PLOTS	
APPENDIX C. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR572123-03D	Rev. 01	Initial issue of report	Jun. 12, 2026



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 3.25 dB at 5373.13 MHz

Note: This is a variant report to add new model names G4QL, G4QP, G4QC, which are only for different appearance and size. Based on the similarity between current and previous project, only the related test cases from original test report (Sporton Report Number FR572123-01D) were verified for the differences

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Meta Platforms Technologies, LLC
1 Meta Way, Menlo Park, CA 94025, USA

1.2 Manufacturer

Meta Platforms Technologies, LLC
1 Meta Way, Menlo Park, CA 94025, USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	AI Glasses
Model Name	G4QM, G4QR, G4QB, G4QS, G4QL, G4QP, G4QC
FCC ID	2AGOZ-G4Q
SN Code	Radiation: 4Q9GK64J3J005X for Sample 5 4Q9GK15J3M002X for Sample 6 4Q9GKC5J3F0076 for Sample 7
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
Antenna Type / Gain	<5180 MHz ~ 5240 MHz> IFA Antenna type with gain 3.77 dBi <5260 MHz ~ 5320 MHz> IFA Antenna type with gain 3.91 dBi <5500 MHz ~ 5720 MHz> IFA Antenna type with gain 3.99 dBi <5745 MHz ~ 5825 MHz> IFA Antenna type with gain 3.65 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-SZ	CN1256	421272



1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH03-SZ	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2020+Cor.1-2023

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z/X plane) were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210	50 ^{##}	5250
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290	-	-
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5500-5720MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640
	-	-	114 ^{##}	5570

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710	-	-

Note:

1. The above Frequency and Channel in "*" are 40MHz bandwidth.
2. The above Frequency and Channel in "[#]" are 80MHz bandwidth.
3. The above Frequency and Channel in "^{##}" are 160MHz bandwidth.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

SISO Mode

Modulation	Data Rate
802.11ac VHT80	MCS0
802.11ac VHT160	MCS0
802.11ax HE80	MCS0

Remark: For Radiated Test Cases, The tests were performance with DC Power Supply.




Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		20M BW	20M BW	20M BW	20M BW
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		40M BW	40M BW	40M BW	40M BW
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159
Straddle		-	-	142	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		80M BW	80M BW	80M BW	80M BW
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	-	-
Straddle		-	-	138	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		160M BW		160M BW	160M BW
M	Middle	50		114	-

2.3 Connection Diagram of Test System

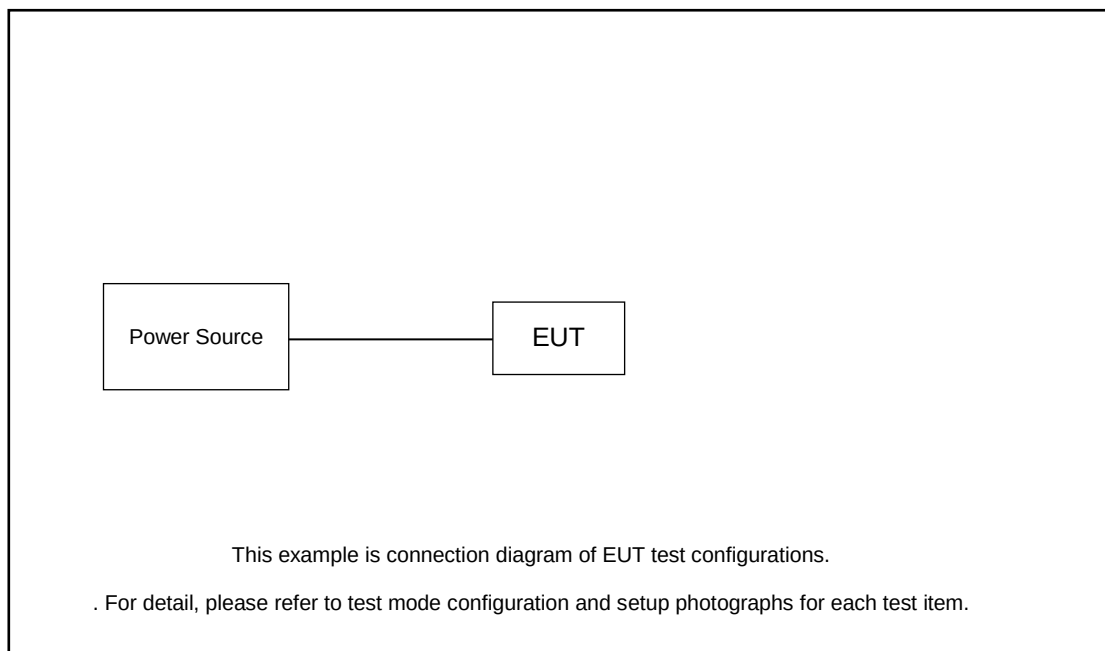

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW INSTRON	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.



3 Test Result

3.1 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.1.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) For transmitters operating in the 5.725-5.85 GHz band:
- 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
(1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.1.4 Test Setup


For radiated emissions below 30MHz

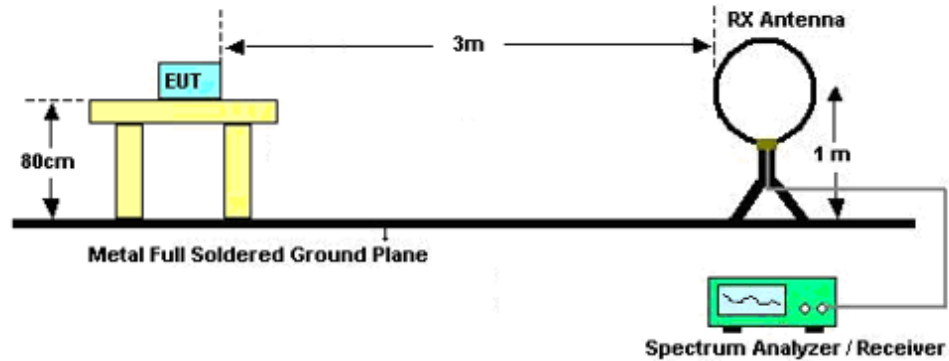

For radiated emissions from 30MHz to 1GHz

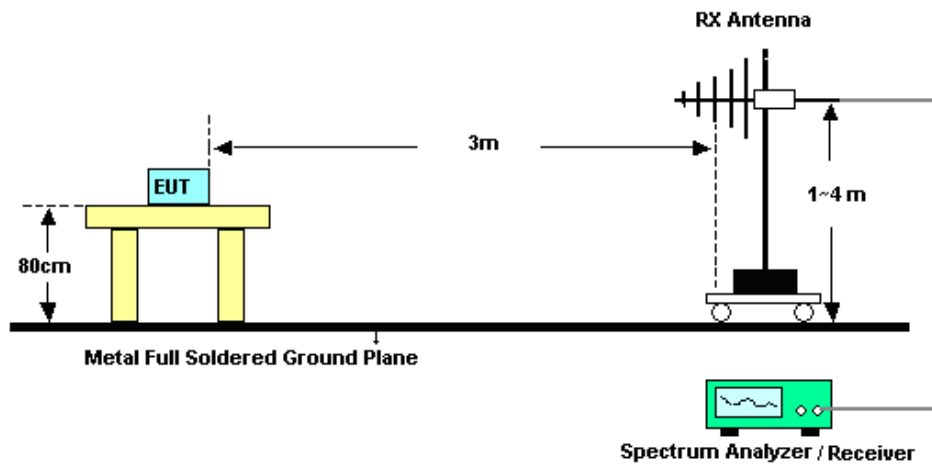

For radiated emissions above 1GHz

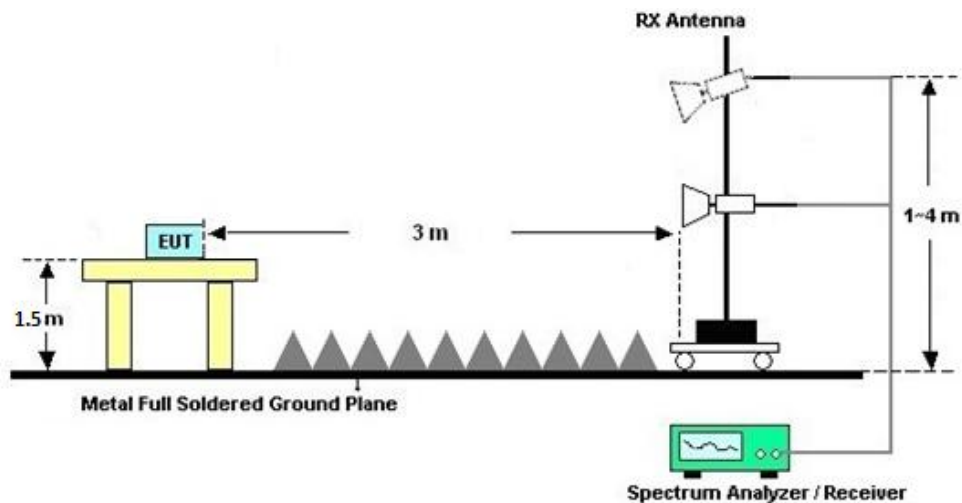



3.1.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.1.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

3.1.7 Duty Cycle

Please refer to Appendix B.

3.1.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix A.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Mar. 26, 2026	May 23, 2026	Mar. 25, 2027	Radiation (03CH03-SZ)
EXA Signal Analyzer	KEYSIGHT	N9010B	MY59071191	10KHz~44GHz	Mar. 27, 2026	May 23, 2026	Mar. 26, 2027	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 25, 2025	May 23, 2026	Dec. 24, 2026	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Sep. 13, 2025	May 23, 2026	Sep. 12, 2026	Radiation (03CH03-SZ)
Double Ridge Guide Antenna	ETS-Lindgren	Burgeon-3117	00240107	1GHz~18GHz	Jul. 13, 2025	May 23, 2026	Jul. 12, 2026	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2025	May 23, 2026	Jul. 02, 2026	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 03, 2025	May 23, 2026	Apr. 02, 2027	Radiation (03CH03-SZ)
Amplifier	EM Electronics	EM330	060756	0.01Hz~3000MHz	Mar. 26, 2026	May 23, 2026	Mar. 25, 2027	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 13, 2025	May 23, 2026	Oct. 12, 2026	Radiation (03CH03-SZ)
HF Amplifier	Keysight	83017A	MY53270357	500MHz~26.5GHz	Mar. 26, 2026	May 23, 2026	Mar. 25, 2027	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	N/A	Oct. 13, 2025	May 23, 2026	Oct. 12, 2026	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	May 23, 2026	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	May 23, 2026	NCR	Radiation (03CH03-SZ)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0 dB
---	--------

----- THE END -----



Appendix A Radiated Spurious Emission Test Data

Test Engineer :	Reid Huang	Relative Humidity :	24 ~ 25 °C
		Temperature :	48 ~ 49 %





Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	1	802.11ac VHT160	50	5250	MCS0	-	Sample7
Mode 2	U-NII-2A	5.25-5.35	1	802.11ax HE80	58	5290	MCS0	Full RU	Sample7
Mode 3	U-NII-2C	5.47-5.725	1	802.11ac VHT160	114	5570	MCS0	-	Sample7
Mode 4	U-NII-3	5.725-5.85	1	802.11ac VHT80	155	5775	MCS0	-	Sample7
Mode 5	U-NII-1	5.15-5.25	1	802.11ac VHT160	50	5250	MCS0	-	Sample5
Mode 6	U-NII-2A	5.25-5.35	1	802.11ax HE80	58	5290	MCS0	Full RU	Sample5
Mode 7	U-NII-2C	5.47-5.725	1	802.11ac VHT160	114	5570	MCS0	-	Sample5
Mode 8	U-NII-3	5.725-5.85	1	802.11ac VHT80	155	5775	MCS0	-	Sample5
Mode 9	U-NII-1	5.15-5.25	1	802.11ac VHT160	50	5250	MCS0	-	Sample6
Mode 10	U-NII-2A	5.25-5.35	1	802.11ax HE80	58	5290	MCS0	Full RU	Sample6
Mode 11	U-NII-2C	5.47-5.725	1	802.11ac VHT160	114	5570	MCS0	-	Sample6
Mode 12	U-NII-3	5.725-5.85	1	802.11ac VHT80	155	5775	MCS0	-	Sample6
Mode 13	U-NII-2A	5.25-5.35	1	802.11ax HE80_LF	58	5290	MCS0	Full RU	Sample5
Mode 14	U-NII-3	5.725-5.85	1	802.11ac VHT80_LF	155	5775	MCS0	-	Sample5



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11ac VHT160	50	5127.50	48.56	54.00	-5.44	H	AVERAGE	Pass	Band Edge
1	802.11ac VHT160	50	10500.00	46.70	68.30	-21.60	V	Peak	Pass	Harmonic
2	802.11ax HE80	58	5374.32	47.74	54.00	-6.26	H	AVERAGE	Pass	Band Edge
2	802.11ax HE80	58	10580.00	46.92	68.30	-21.38	V	Peak	Pass	Harmonic
3	802.11ac VHT160	114	5437.34	49.12	54.00	-4.88	H	AVERAGE	Pass	Band Edge
3	802.11ac VHT160	114	16710.00	47.58	68.30	-20.72	V	Peak	Pass	Harmonic
4	802.11ac VHT80	155	5644.28	55.22	68.30	-13.08	H	PEAK	Pass	Band Edge
4	802.11ac VHT80	155	17325.00	48.37	68.30	-19.93	H	Peak	Pass	Harmonic
5	802.11ac VHT160	50	5407.08	48.07	54.00	-5.93	H	AVERAGE	Pass	Band Edge
5	802.11ac VHT160	50	10500.00	47.66	68.30	-20.64	V	Peak	Pass	Harmonic
6	802.11ax HE80	58	5373.13	50.75	54.00	-3.25	H	AVERAGE	Pass	Band Edge
6	802.11ax HE80	58	10580.00	47.62	68.30	-20.68	H	Peak	Pass	Harmonic
7	802.11ac VHT160	114	5367.38	49.77	54.00	-4.23	H	AVERAGE	Pass	Band Edge
7	802.11ac VHT160	114	16710.00	48.40	68.30	-19.90	H	Peak	Pass	Harmonic
8	802.11ac VHT80	155	5651.10	61.09	69.12	-8.03	H	PEAK	Pass	Band Edge
8	802.11ac VHT80	155	17325.00	47.51	68.30	-20.79	H	Peak	Pass	Harmonic
9	802.11ac VHT160	50	5439.42	47.95	54.00	-6.05	H	AVERAGE	Pass	Band Edge
9	802.11ac VHT160	50	10500.00	47.03	68.30	-21.27	V	Peak	Pass	Harmonic
10	802.11ax HE80	58	5374.83	49.23	54.00	-4.77	H	AVERAGE	Pass	Band Edge
10	802.11ax HE80	58	10580.00	46.97	68.30	-21.33	V	Peak	Pass	Harmonic
11	802.11ac VHT160	114	5432.50	49.67	54.00	-4.33	H	AVERAGE	Pass	Band Edge
11	802.11ac VHT160	114	16710.00	47.88	68.30	-20.42	H	Peak	Pass	Harmonic
12	802.11ac VHT80	155	5650.58	56.04	68.73	-12.69	H	PEAK	Pass	Band Edge
12	802.11ac VHT80	155	17325.00	48.47	68.30	-19.83	H	Peak	Pass	Harmonic
13	802.11ax HE80_LF	58	870.99	29.51	46	-16.49	V	PEAK	Pass	LF
14	802.11ac VHT80_LF	155	861.29	30.63	46	-15.37	H	Peak	Pass	LF

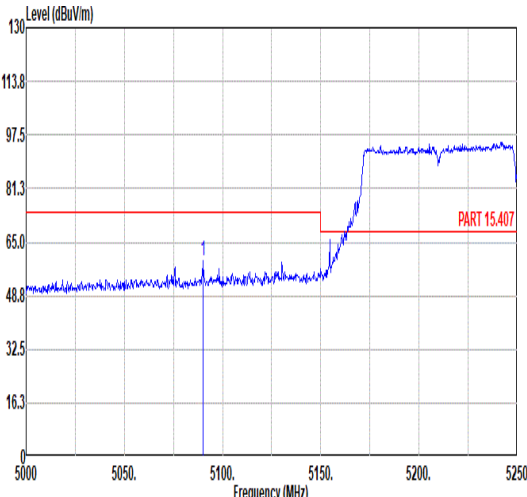
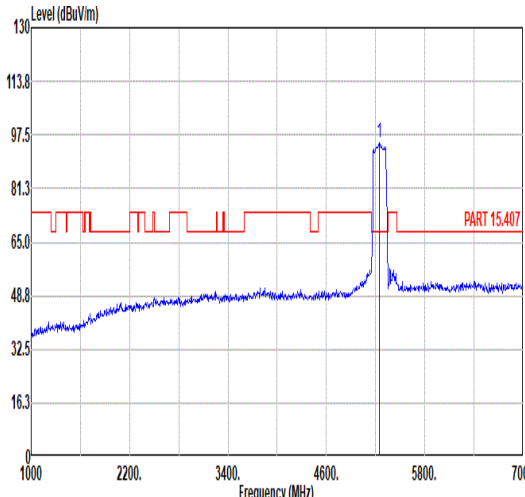
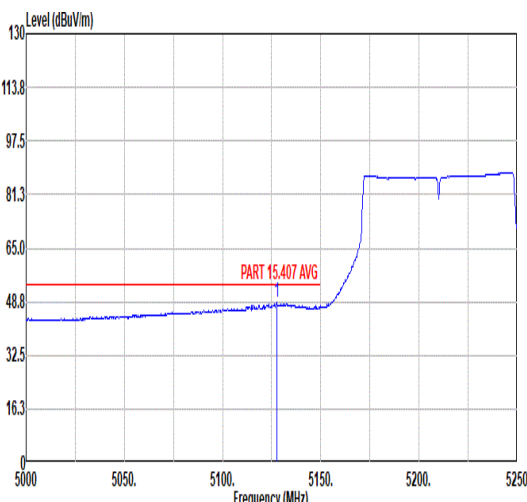
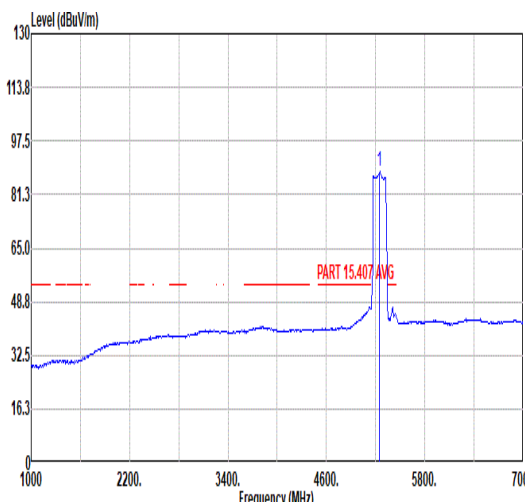


Mode	1																																																																																						
	Band Edge - L																																																																																						
	U-NII-1_5.15-5.25_802.11ac VHT160_CH50_5250MHz																																																																																						
ANT	1																																																																																						
Pol.	Horizontal						Fundamental																																																																																
Peak																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5090.25</td><td>59.54</td><td>74.00</td><td>-14.46</td><td>46.98</td><td>34.89</td><td>9.92</td><td>32.25</td><td>100</td><td>128</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5090.25	59.54	74.00	-14.46	46.98	34.89	9.92	32.25	100	128	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5250.00</td><td>94.97</td><td>-----</td><td>-----</td><td>82.04</td><td>35.08</td><td>10.05</td><td>32.20</td><td>100</td><td>128</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5250.00	94.97	-----	-----	82.04	35.08	10.05	32.20	100	128
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																
1	5090.25	59.54	74.00	-14.46	46.98	34.89	9.92	32.25	100	128	PEAK																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																
1	5250.00	94.97	-----	-----	82.04	35.08	10.05	32.20	100	128	PEAK																																																																												
Avg																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5127.50</td><td>48.56</td><td>54.00</td><td>-5.44</td><td>35.94</td><td>34.93</td><td>9.94</td><td>32.25</td><td>100</td><td>128</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5127.50	48.56	54.00	-5.44	35.94	34.93	9.94	32.25	100	128	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>5250.00</td><td>88.07</td><td>-----</td><td>-----</td><td>75.09</td><td>35.11</td><td>10.07</td><td>32.20</td><td>100</td><td>128</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5250.00	88.07	-----	-----	75.09	35.11	10.07	32.20	100	128
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																
1	5127.50	48.56	54.00	-5.44	35.94	34.93	9.94	32.25	100	128	AVERAGE																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																
1	5250.00	88.07	-----	-----	75.09	35.11	10.07	32.20	100	128	AVERAGE																																																																												

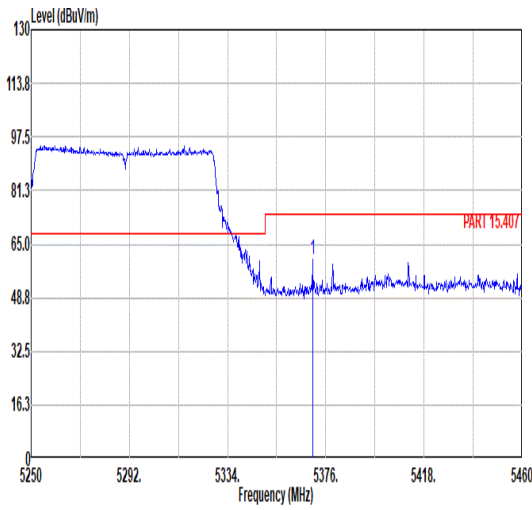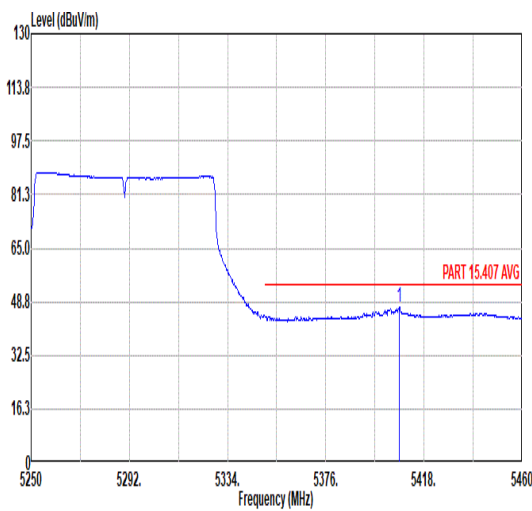

Mode	1																																																			
	Band Edge - R																																																			
	U-NII-1_5.15-5.25_802.11ac VHT160_CH50_5250MHz																																																			
ANT	1																																																			
Pol.	Horizontal						Fundamental																																													
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5370.33</td><td>60.29</td><td>74.00</td><td>-13.71</td><td>47.02</td><td>35.20</td><td>10.24</td><td>32.17</td><td>100</td><td>128</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5370.33	60.29	74.00	-13.71	47.02	35.20	10.24	32.17	100	128	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																											
1	5370.33	60.29	74.00	-13.71	47.02	35.20	10.24	32.17	100	128	PEAK																																									
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5407.29</td><td>47.24</td><td>54.00</td><td>-6.76</td><td>33.94</td><td>35.20</td><td>10.29</td><td>32.19</td><td>100</td><td>128</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5407.29	47.24	54.00	-6.76	33.94	35.20	10.29	32.19	100	128	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																											
1	5407.29	47.24	54.00	-6.76	33.94	35.20	10.29	32.19	100	128	AVERAGE																																									

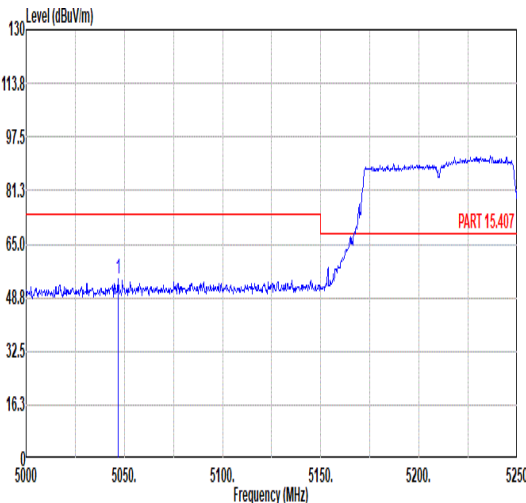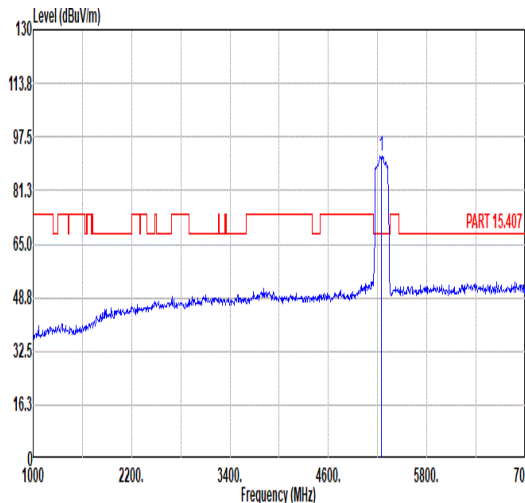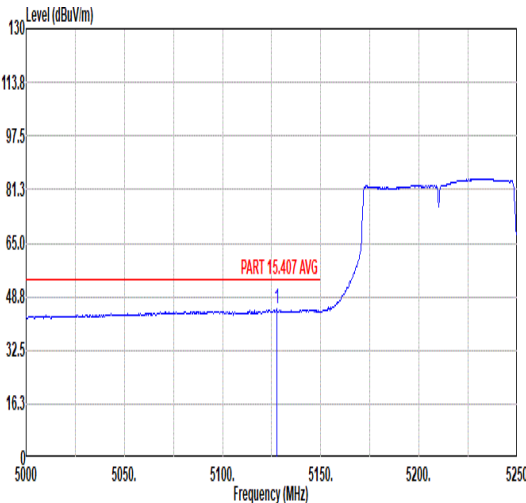
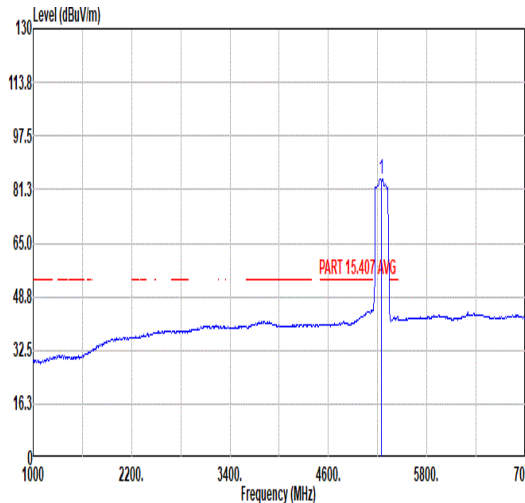


Mode	1																																																																																			
	Band Edge - L																																																																																			
	U-NII-1_5.15-5.25_802.11ac VHT160_CH50_5250MHz																																																																																			
ANT	1																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5046.75</td><td>54.38</td><td>74.00</td><td>-19.62</td><td>41.90</td><td>34.85</td><td>9.89</td><td>32.26</td><td>119</td><td>65</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5046.75	54.38	74.00	-19.62	41.90	34.85	9.89	32.26	119	65	PEAK	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5250.00</td><td>91.86</td><td>-----</td><td>-----</td><td>78.86</td><td>35.12</td><td>10.08</td><td>32.20</td><td>119</td><td>65</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5250.00	91.86	-----	-----	78.86	35.12	10.08	32.20	119	65	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5046.75	54.38	74.00	-19.62	41.90	34.85	9.89	32.26	119	65	PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5250.00	91.86	-----	-----	78.86	35.12	10.08	32.20	119	65	PEAK																																																																									
Avg	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5127.50</td><td>44.95</td><td>54.00</td><td>-9.05</td><td>32.33</td><td>34.93</td><td>9.94</td><td>32.25</td><td>119</td><td>65</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5127.50	44.95	54.00	-9.05	32.33	34.93	9.94	32.25	119	65	AVERAGE	 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5250.00</td><td>84.40</td><td>-----</td><td>-----</td><td>71.50</td><td>35.06</td><td>10.04</td><td>32.20</td><td>119</td><td>65</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5250.00	84.40	-----	-----	71.50	35.06	10.04	32.20	119	65	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5127.50	44.95	54.00	-9.05	32.33	34.93	9.94	32.25	119	65	AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	5250.00	84.40	-----	-----	71.50	35.06	10.04	32.20	119	65	AVERAGE																																																																									







Mode	1																																								
	Band Edge - R																																								
	U-NII-1_5.15-5.25_802.11ac VHT160_CH50_5250MHz																																								
ANT	1																																								
Pol.	Vertical	Fundamental																																							
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5366.76</td><td>54.99</td><td>74.00</td><td>-19.01</td><td>41.72</td><td>35.20</td><td>10.24</td><td>32.17</td><td>119</td><td>65 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5366.76	54.99	74.00	-19.01	41.72	35.20	10.24	32.17	119	65 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																
1	5366.76	54.99	74.00	-19.01	41.72	35.20	10.24	32.17	119	65 PEAK																															
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5402.67</td><td>42.94</td><td>54.00</td><td>-11.06</td><td>29.63</td><td>35.20</td><td>10.29</td><td>32.18</td><td>119</td><td>65 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5402.67	42.94	54.00	-11.06	29.63	35.20	10.29	32.18	119	65 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																
1	5402.67	42.94	54.00	-11.06	29.63	35.20	10.29	32.18	119	65 AVERAGE																															

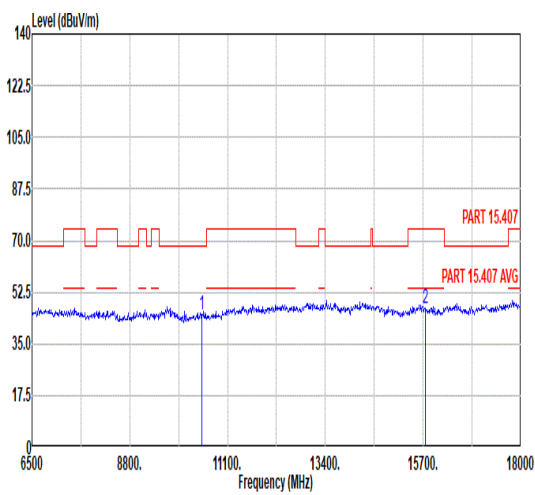
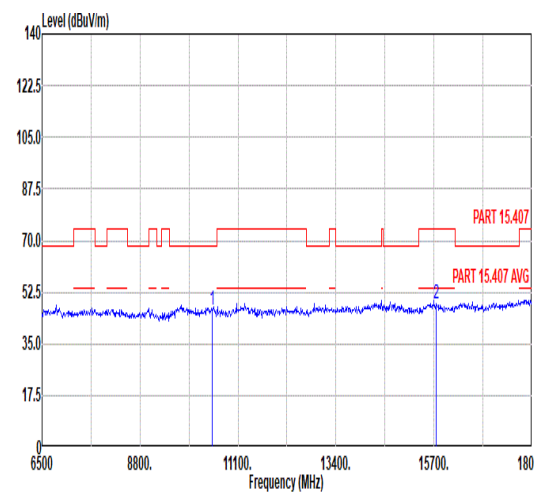


Mode	1																																																																					
	Harmonic																																																																					
	U-NII-1_5.15-5.25_802.11ac VHT160_CH50_5250MHz																																																																					
ANT	1																																																																					
Pol.	Horizontal																																																																					
Peak Avg																																																																						
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 10500.00</td><td>45.12</td><td>68.30</td><td>-23.18</td><td>54.13</td><td>37.30</td><td>13.39</td><td>59.70</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>2 15750.00</td><td>47.11</td><td>74.00</td><td>-26.89</td><td>49.23</td><td>40.35</td><td>15.88</td><td>58.35</td><td>--</td><td>--</td><td>Peak</td><td></td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 10500.00	45.12	68.30	-23.18	54.13	37.30	13.39	59.70	--	--	Peak		2 15750.00	47.11	74.00	-26.89	49.23	40.35	15.88	58.35	--	--	Peak	
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																													
1 10500.00	45.12	68.30	-23.18	54.13	37.30	13.39	59.70	--	--	Peak																																																												
2 15750.00	47.11	74.00	-26.89	49.23	40.35	15.88	58.35	--	--	Peak																																																												
Vertical																																																																						
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 10500.00</td><td>46.70</td><td>68.30</td><td>-21.60</td><td>55.71</td><td>37.30</td><td>13.39</td><td>59.70</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>2 15750.00</td><td>48.48</td><td>74.00</td><td>-25.52</td><td>50.60</td><td>40.35</td><td>15.88</td><td>58.35</td><td>--</td><td>--</td><td>Peak</td><td></td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 10500.00	46.70	68.30	-21.60	55.71	37.30	13.39	59.70	--	--	Peak		2 15750.00	48.48	74.00	-25.52	50.60	40.35	15.88	58.35	--	--	Peak	
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																													
1 10500.00	46.70	68.30	-21.60	55.71	37.30	13.39	59.70	--	--	Peak																																																												
2 15750.00	48.48	74.00	-25.52	50.60	40.35	15.88	58.35	--	--	Peak																																																												

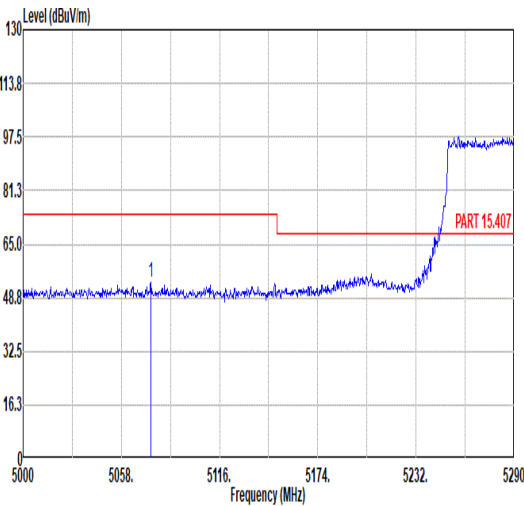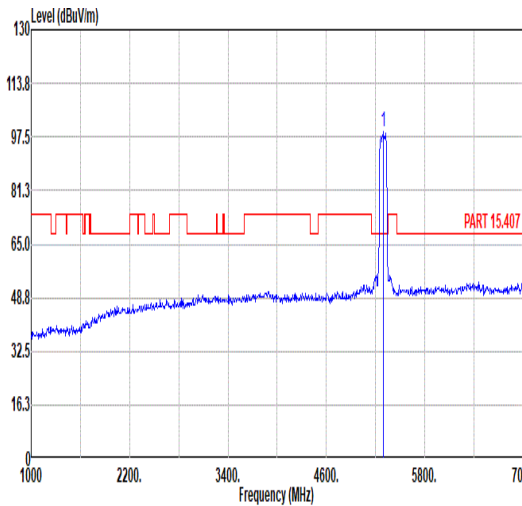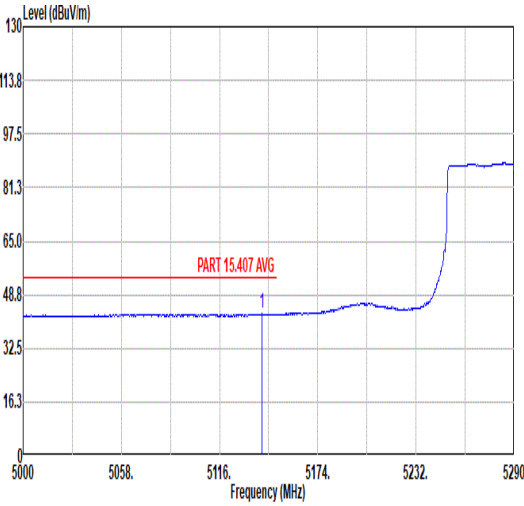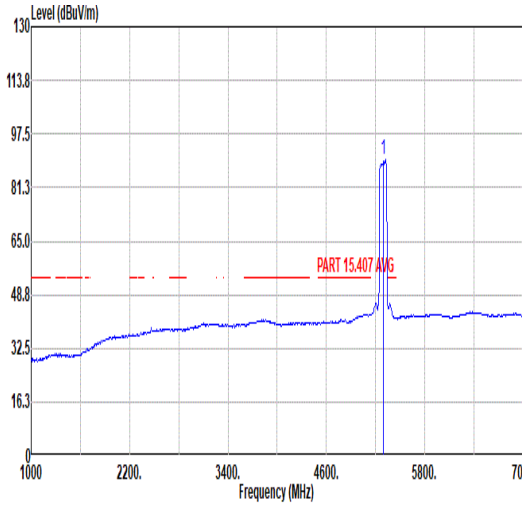

Mode	2																																																		
	Band Edge - L																																																		
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																		
ANT	1																																																		
Pol.	Horizontal																																																		
Peak	Fundamental																																																		
																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5075.40</td><td>53.31</td><td>74.00</td><td>-20.69</td><td>40.77</td><td>34.88</td><td>9.91</td><td>32.25</td><td>324</td><td>131</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5075.40	53.31	74.00	-20.69	40.77	34.88	9.91	32.25	324	131	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5075.40	53.31	74.00	-20.69	40.77	34.88	9.91	32.25	324	131	PEAK																																								
Avg																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5290.00</td><td>99.15</td><td>-----</td><td>-----</td><td>86.01</td><td>35.19</td><td>10.13</td><td>32.18</td><td>324</td><td>131</td><td>PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	99.15	-----	-----	86.01	35.19	10.13	32.18	324	131	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5290.00	99.15	-----	-----	86.01	35.19	10.13	32.18	324	131	PEAK																																								
Peak																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5140.94</td><td>43.00</td><td>54.00</td><td>-11.00</td><td>30.36</td><td>34.94</td><td>9.95</td><td>32.25</td><td>324</td><td>131</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5140.94	43.00	54.00	-11.00	30.36	34.94	9.95	32.25	324	131	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5140.94	43.00	54.00	-11.00	30.36	34.94	9.95	32.25	324	131	AVERAGE																																								
Avg																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5290.00</td><td>89.99</td><td>-----</td><td>-----</td><td>76.79</td><td>35.20</td><td>10.18</td><td>32.18</td><td>324</td><td>131</td><td>AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	89.99	-----	-----	76.79	35.20	10.18	32.18	324	131	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5290.00	89.99	-----	-----	76.79	35.20	10.18	32.18	324	131	AVERAGE																																								

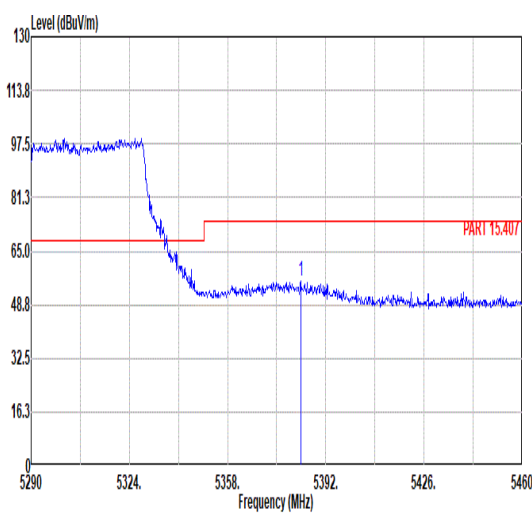
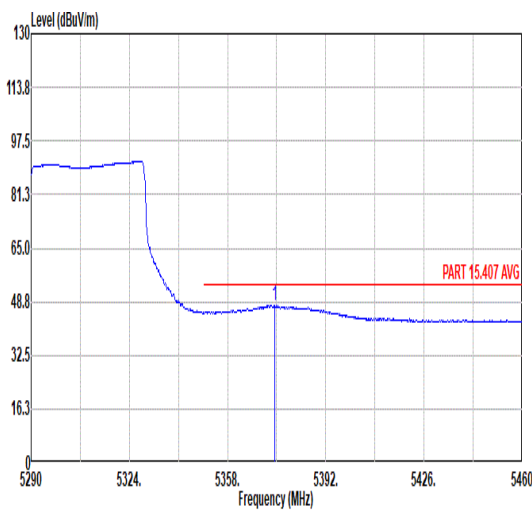


Mode	2																																																	
	Band Edge - R																																																	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																	
ANT	1																																																	
Pol.	Horizontal										Fundamental																																							
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5383.33</td><td>55.89</td><td>74.00</td><td>-18.11</td><td>42.61</td><td>35.20</td><td>10.26</td><td>32.18</td><td>131</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5383.33	55.89	74.00	-18.11	42.61	35.20	10.26	32.18	131	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5383.33	55.89	74.00	-18.11	42.61	35.20	10.26	32.18	131	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5374.32</td><td>47.74</td><td>54.00</td><td>-6.26</td><td>34.46</td><td>35.20</td><td>10.25</td><td>32.17</td><td>131</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5374.32	47.74	54.00	-6.26	34.46	35.20	10.25	32.17	131	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5374.32	47.74	54.00	-6.26	34.46	35.20	10.25	32.17	131	AVERAGE																																								





Mode	2																																																																																			
	Band Edge - L																																																																																			
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																																																			
ANT	1																																																																																			
Pol.	Vertical						Fundamental																																																																													
Peak																																																																																				
		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5096.57	52.75	74.00	-21.25	40.18	34.90	9.92	32.25	100	303	PEAK		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	96.66	-----	-----	83.46	35.20	10.18	32.18	100	303	PEAK				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																											
1	5096.57	52.75	74.00	-21.25	40.18	34.90	9.92	32.25	100	303	PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																											
1	5290.00	96.66	-----	-----	83.46	35.20	10.18	32.18	100	303	PEAK																																																																									
Avg																																																																																				
		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5058.87	42.83	54.00	-11.17	30.34	34.86	9.89	32.26	100	303	AVERAGE		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	86.15	-----	-----	72.95	35.20	10.18	32.18	100	303	AVERAGE				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																											
1	5058.87	42.83	54.00	-11.17	30.34	34.86	9.89	32.26	100	303	AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																											
1	5290.00	86.15	-----	-----	72.95	35.20	10.18	32.18	100	303	AVERAGE																																																																									



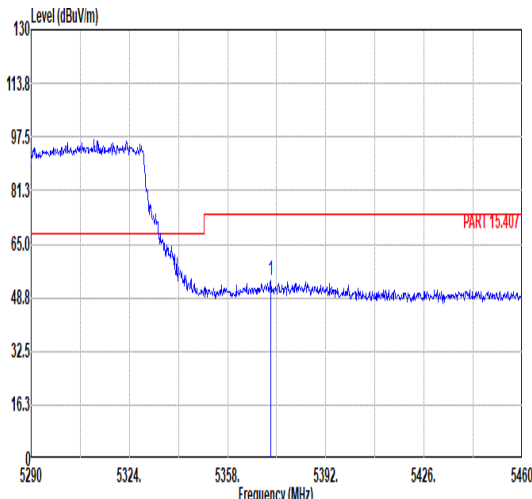
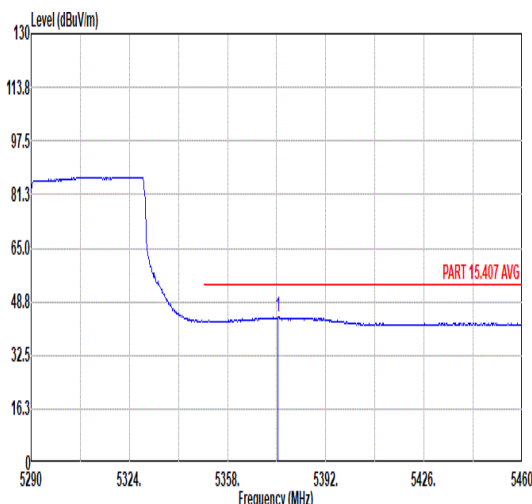


Mode	2																																									
	Band Edge - R																																									
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																									
ANT	1																																									
Pol.	Vertical	Fundamental																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5372.96</td><td>53.76</td><td>74.00</td><td>-20.24</td><td>40.48</td><td>35.20</td><td>10.25</td><td>32.17</td><td>100</td><td>303</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5372.96	53.76	74.00	-20.24	40.48	35.20	10.25	32.17	100	303	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5372.96	53.76	74.00	-20.24	40.48	35.20	10.25	32.17	100	303	PEAK																															
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5375.51</td><td>44.02</td><td>54.00</td><td>-9.98</td><td>30.74</td><td>35.20</td><td>10.25</td><td>32.17</td><td>100</td><td>303</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5375.51	44.02	54.00	-9.98	30.74	35.20	10.25	32.17	100	303	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5375.51	44.02	54.00	-9.98	30.74	35.20	10.25	32.17	100	303	AVERAGE																															

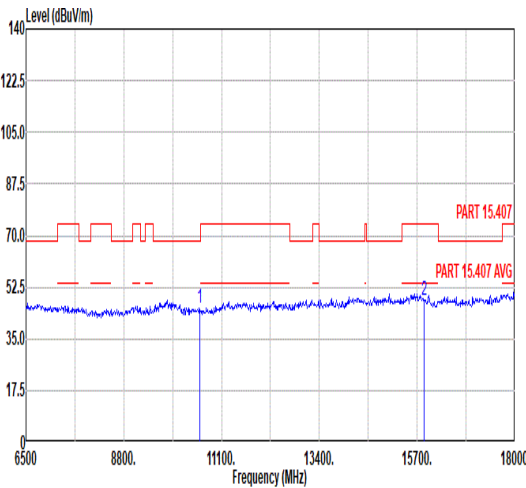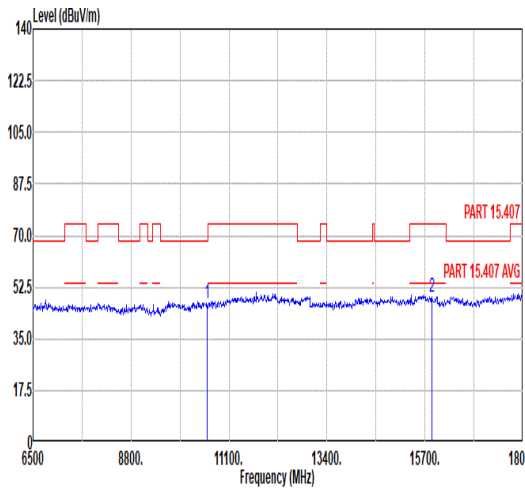

Mode	2																																																																																																																											
	Harmonic																																																																																																																											
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																																																																																											
ANT	1																																																																																																																											
Pol.	Horizontal							Vertical																																																																																																																				
Peak Avg																																																																																																																												
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10580.00</td><td>45.21</td><td>68.30</td><td>-23.09</td><td>53.86</td><td>37.39</td><td>13.50</td><td>59.54</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15870.00</td><td>47.97</td><td>74.00</td><td>-26.03</td><td>50.18</td><td>40.42</td><td>15.98</td><td>58.61</td><td>--</td><td>--</td><td>Peak</td></tr></table>									Limit		Read		Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10580.00	45.21	68.30	-23.09	53.86	37.39	13.50	59.54	--	--	Peak	2	15870.00	47.97	74.00	-26.03	50.18	40.42	15.98	58.61	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10580.00</td><td>46.92</td><td>68.30</td><td>-21.38</td><td>55.57</td><td>37.39</td><td>13.50</td><td>59.54</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15870.00</td><td>49.06</td><td>74.00</td><td>-24.94</td><td>51.27</td><td>40.42</td><td>15.98</td><td>58.61</td><td>--</td><td>--</td><td>Peak</td></tr></table>									Limit		Read		Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10580.00	46.92	68.30	-21.38	55.57	37.39	13.50	59.54	--	--	Peak	2	15870.00	49.06	74.00	-24.94	51.27	40.42	15.98	58.61	--	--	Peak
			Limit		Read		Ant	Cable Preamp	APos	TPos	Remark																																																																																																																	
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	10580.00	45.21	68.30	-23.09	53.86	37.39	13.50	59.54	--	--	Peak																																																																																																																	
2	15870.00	47.97	74.00	-26.03	50.18	40.42	15.98	58.61	--	--	Peak																																																																																																																	
		Limit		Read		Ant	Cable Preamp	APos	TPos	Remark																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	10580.00	46.92	68.30	-21.38	55.57	37.39	13.50	59.54	--	--	Peak																																																																																																																	
2	15870.00	49.06	74.00	-24.94	51.27	40.42	15.98	58.61	--	--	Peak																																																																																																																	

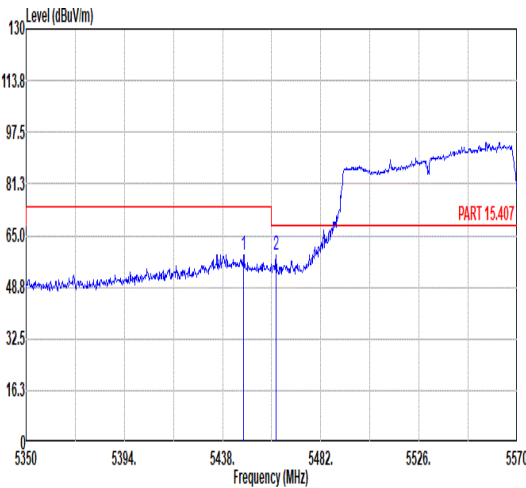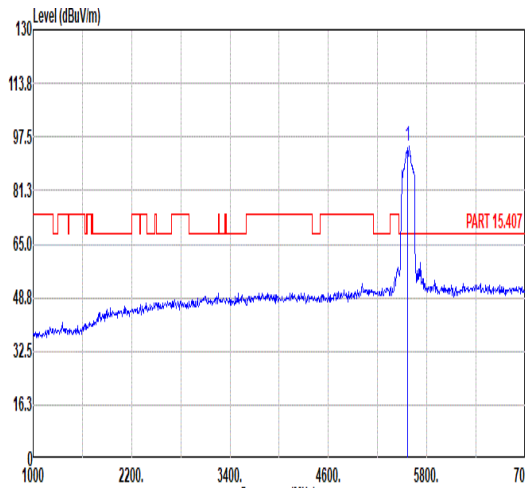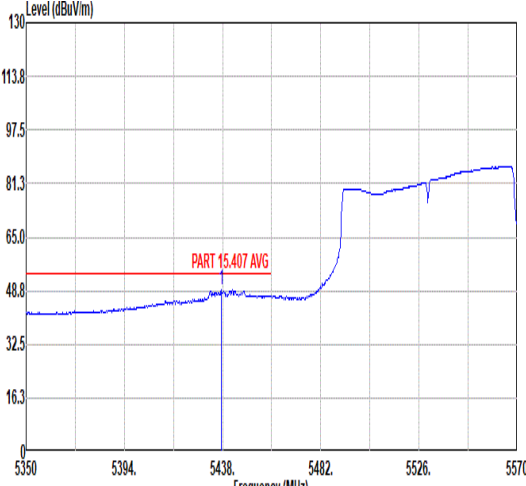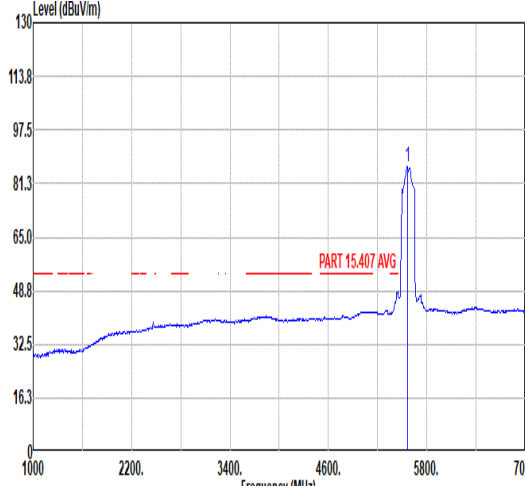

Mode	3																																																																																																									
	Band Edge - L																																																																																																									
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz																																																																																																									
ANT	1																																																																																																									
Pol.	Horizontal						Fundamental																																																																																																			
Peak																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5447.46</td><td>59.11</td><td>74.00</td><td>-14.89</td><td>45.87</td><td>35.20</td><td>10.29</td><td>32.25</td><td>391</td><td>127</td><td>PEAK</td></tr><tr><td>2</td><td>5461.98</td><td>59.09</td><td>68.30</td><td>-9.21</td><td>45.85</td><td>35.20</td><td>10.30</td><td>32.26</td><td>391</td><td>127</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5447.46	59.11	74.00	-14.89	45.87	35.20	10.29	32.25	391	127	PEAK	2	5461.98	59.09	68.30	-9.21	45.85	35.20	10.30	32.26	391	127	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5570.00</td><td>94.69</td><td>-----</td><td>-----</td><td>81.38</td><td>35.28</td><td>10.31</td><td>32.28</td><td>391</td><td>127</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5570.00	94.69	-----	-----	81.38	35.28	10.31	32.28	391	127
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5447.46	59.11	74.00	-14.89	45.87	35.20	10.29	32.25	391	127	PEAK																																																																																															
2	5461.98	59.09	68.30	-9.21	45.85	35.20	10.30	32.26	391	127	PEAK																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5570.00	94.69	-----	-----	81.38	35.28	10.31	32.28	391	127	PEAK																																																																																															
Avg																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5437.34</td><td>49.12</td><td>54.00</td><td>-4.88</td><td>35.86</td><td>35.20</td><td>10.29</td><td>32.23</td><td>391</td><td>127</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5437.34	49.12	54.00	-4.88	35.86	35.20	10.29	32.23	391	127	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5570.00</td><td>86.37</td><td>-----</td><td>-----</td><td>73.09</td><td>35.26</td><td>10.31</td><td>32.29</td><td>391</td><td>127</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5570.00	86.37	-----	-----	73.09	35.26	10.31	32.29	391	127	AVERAGE											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5437.34	49.12	54.00	-4.88	35.86	35.20	10.29	32.23	391	127	AVERAGE																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																
1	5570.00	86.37	-----	-----	73.09	35.26	10.31	32.29	391	127	AVERAGE																																																																																															




Mode	3																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz																																									
ANT	1																																									
Pol.	Horizontal	Fundamental																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5726.98</td><td>55.67</td><td>68.30</td><td>-12.63</td><td>42.09</td><td>35.57</td><td>10.37</td><td>32.36</td><td>391</td><td>127</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5726.98	55.67	68.30	-12.63	42.09	35.57	10.37	32.36	391	127	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1	5726.98	55.67	68.30	-12.63	42.09	35.57	10.37	32.36	391	127	PEAK																															



Mode	3																																																																																													
	Band Edge - L																																																																																													
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz																																																																																													
ANT	1																																																																																													
Pol.	Vertical	Fundamental																																																																																												
Peak	Vertical Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 5350 to 5570 MHz. The plot shows a blue trace with two peaks labeled 1 and 2. A red limit line is shown at 65.0 dBuV/m. The text 'PART 15.407' is visible in the plot area. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5443.94</td><td>56.88</td><td>74.00</td><td>-17.12</td><td>43.63</td><td>35.20</td><td>10.29</td><td>32.24</td><td>103</td><td>358</td><td>PEAK</td></tr><tr><td>2</td><td>5462.86</td><td>60.05</td><td>68.30</td><td>-8.25</td><td>46.81</td><td>35.20</td><td>10.30</td><td>32.26</td><td>103</td><td>358</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5443.94	56.88	74.00	-17.12	43.63	35.20	10.29	32.24	103	358	PEAK	2	5462.86	60.05	68.30	-8.25	46.81	35.20	10.30	32.26	103	358	PEAK	Fundamental Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 1000 to 7000 MHz. The plot shows a blue trace with a single peak labeled 1. A red limit line is shown at 65.0 dBuV/m. The text 'PART 15.407' is visible in the plot area. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5570.00</td><td>90.78</td><td>-----</td><td>-----</td><td>77.46</td><td>35.29</td><td>10.31</td><td>32.28</td><td>103</td><td>358</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5570.00	90.78	-----	-----	77.46	35.29	10.31	32.28	103	358	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																					
1	5443.94	56.88	74.00	-17.12	43.63	35.20	10.29	32.24	103	358	PEAK																																																																																			
2	5462.86	60.05	68.30	-8.25	46.81	35.20	10.30	32.26	103	358	PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																					
1	5570.00	90.78	-----	-----	77.46	35.29	10.31	32.28	103	358	PEAK																																																																																			
Avg	Vertical Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 5350 to 5570 MHz. The plot shows a blue trace with a single peak labeled 1. A red limit line is shown at 65.0 dBuV/m. The text 'PART 15.407 AVG' is visible in the plot area. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5447.46</td><td>46.77</td><td>54.00</td><td>-7.23</td><td>33.53</td><td>35.20</td><td>10.29</td><td>32.25</td><td>103</td><td>358</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5447.46	46.77	54.00	-7.23	33.53	35.20	10.29	32.25	103	358	AVERAGE	Fundamental Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 1000 to 7000 MHz. The plot shows a blue trace with a single peak labeled 1. A red limit line is shown at 65.0 dBuV/m. The text 'PART 15.407 AVG' is visible in the plot area. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5570.00</td><td>83.82</td><td>-----</td><td>-----</td><td>70.50</td><td>35.29</td><td>10.31</td><td>32.28</td><td>103</td><td>358</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5570.00	83.82	-----	-----	70.50	35.29	10.31	32.28	103	358	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																					
1	5447.46	46.77	54.00	-7.23	33.53	35.20	10.29	32.25	103	358	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																					
1	5570.00	83.82	-----	-----	70.50	35.29	10.31	32.28	103	358	AVERAGE																																																																																			



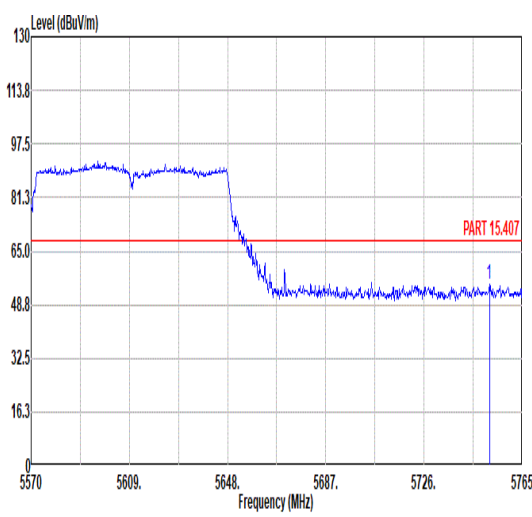


Mode	3																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz																																								
ANT	1																																								
Pol.	Vertical	Fundamental																																							
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5751.94</td><td>54.95</td><td>68.30</td><td>-13.35</td><td>41.29</td><td>35.62</td><td>10.39</td><td>32.35</td><td>103</td><td>358</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5751.94	54.95	68.30	-13.35	41.29	35.62	10.39	32.35	103	358	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1	5751.94	54.95	68.30	-13.35	41.29	35.62	10.39	32.35	103	358	PEAK																														






Mode	3																																																																																															
	Harmonic																																																																																															
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 11140.00</td><td>47.73</td><td>74.00</td><td>-26.27</td><td>54.42</td><td>38.04</td><td>13.72</td><td>58.45</td></tr><tr><td>2 16710.00</td><td>47.05</td><td>68.30</td><td>-21.25</td><td>46.68</td><td>41.84</td><td>16.56</td><td>58.03</td></tr></tbody></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 11140.00	47.73	74.00	-26.27	54.42	38.04	13.72	58.45	2 16710.00	47.05	68.30	-21.25	46.68	41.84	16.56	58.03	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 11140.00</td><td>47.10</td><td>74.00</td><td>-26.90</td><td>53.79</td><td>38.04</td><td>13.72</td><td>58.45</td></tr><tr><td>2 16710.00</td><td>47.58</td><td>68.30</td><td>-20.72</td><td>47.21</td><td>41.84</td><td>16.56</td><td>58.03</td></tr></tbody></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 11140.00	47.10	74.00	-26.90	53.79	38.04	13.72	58.45	2 16710.00	47.58	68.30	-20.72	47.21	41.84	16.56	58.03
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1 11140.00	47.73	74.00	-26.27	54.42	38.04	13.72	58.45																																																																																									
2 16710.00	47.05	68.30	-21.25	46.68	41.84	16.56	58.03																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1 11140.00	47.10	74.00	-26.90	53.79	38.04	13.72	58.45																																																																																									
2 16710.00	47.58	68.30	-20.72	47.21	41.84	16.56	58.03																																																																																									

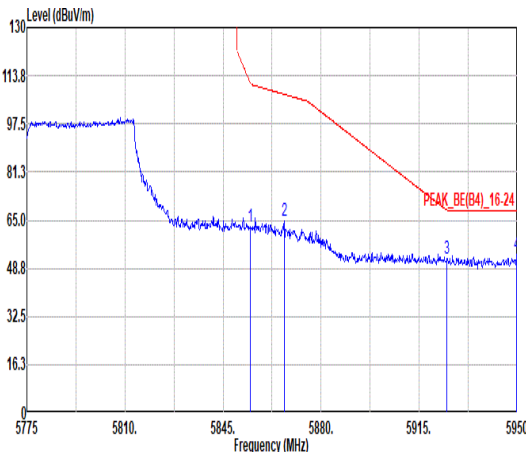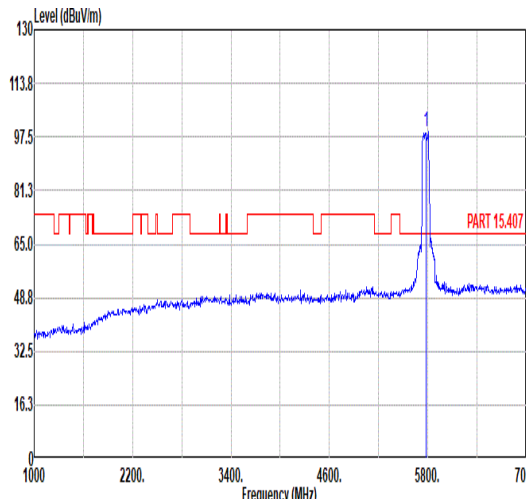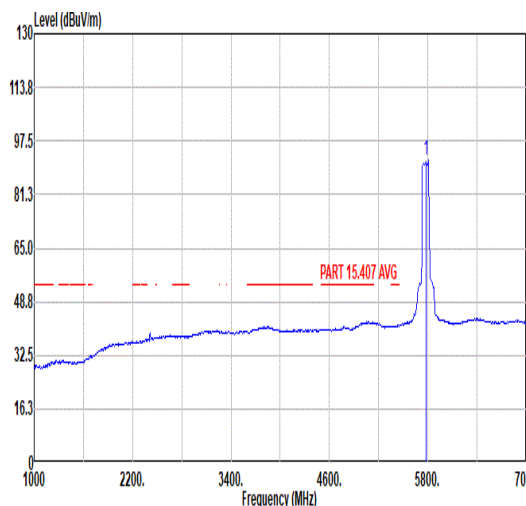


Mode	4																																																																																																																																			
	Band Edge - L																																																																																																																																			
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																																			
ANT	1																																																																																																																																			
Pol.	Horizontal							Fundamental																																																																																																																												
Peak																																																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5854.80</td><td>62.82</td><td>111.26</td><td>-48.44</td><td>48.88</td><td>35.88</td><td>10.46</td><td>32.40</td><td>103</td><td>122</td><td>PEAK</td></tr><tr><td>2</td><td>5866.88</td><td>64.56</td><td>107.47</td><td>-42.91</td><td>50.59</td><td>35.91</td><td>10.47</td><td>32.41</td><td>103</td><td>122</td><td>PEAK</td></tr><tr><td>3</td><td>5924.98</td><td>51.99</td><td>68.22</td><td>-16.23</td><td>37.89</td><td>36.03</td><td>10.53</td><td>32.46</td><td>103</td><td>122</td><td>PEAK</td></tr><tr><td>4</td><td>5949.65</td><td>53.44</td><td>68.30</td><td>-14.86</td><td>39.33</td><td>36.05</td><td>10.55</td><td>32.49</td><td>103</td><td>122</td><td>PEAK</td></tr></tbody></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5854.80	62.82	111.26	-48.44	48.88	35.88	10.46	32.40	103	122	PEAK	2	5866.88	64.56	107.47	-42.91	50.59	35.91	10.47	32.41	103	122	PEAK	3	5924.98	51.99	68.22	-16.23	37.89	36.03	10.53	32.46	103	122	PEAK	4	5949.65	53.44	68.30	-14.86	39.33	36.05	10.55	32.49	103	122	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>98.91</td><td>-----</td><td>-----</td><td>85.08</td><td>35.75</td><td>10.43</td><td>32.35</td><td>103</td><td>122</td><td>PEAK</td></tr></tbody></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5775.00	98.91	-----	-----	85.08	35.75	10.43	32.35	103	122	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																											
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																										
1	5854.80	62.82	111.26	-48.44	48.88	35.88	10.46	32.40	103	122	PEAK																																																																																																																									
2	5866.88	64.56	107.47	-42.91	50.59	35.91	10.47	32.41	103	122	PEAK																																																																																																																									
3	5924.98	51.99	68.22	-16.23	37.89	36.03	10.53	32.46	103	122	PEAK																																																																																																																									
4	5949.65	53.44	68.30	-14.86	39.33	36.05	10.55	32.49	103	122	PEAK																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5775.00	98.91	-----	-----	85.08	35.75	10.43	32.35	103	122	PEAK																																																																																																																									
Avg	Blank																																																																																																																																			
								<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>91.77</td><td>-----</td><td>-----</td><td>77.94</td><td>35.75</td><td>10.43</td><td>32.35</td><td>103</td><td>122</td><td>AVERAGE</td></tr></tbody></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5775.00	91.77	-----	-----	77.94	35.75	10.43	32.35	103	122	AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																											
1	5775.00	91.77	-----	-----	77.94	35.75	10.43	32.35	103	122	AVERAGE																																																																																																																									

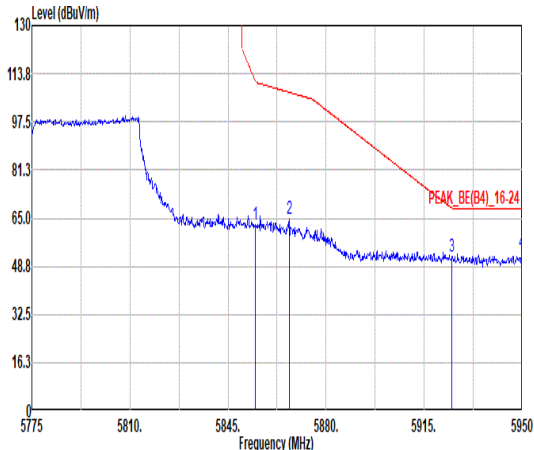
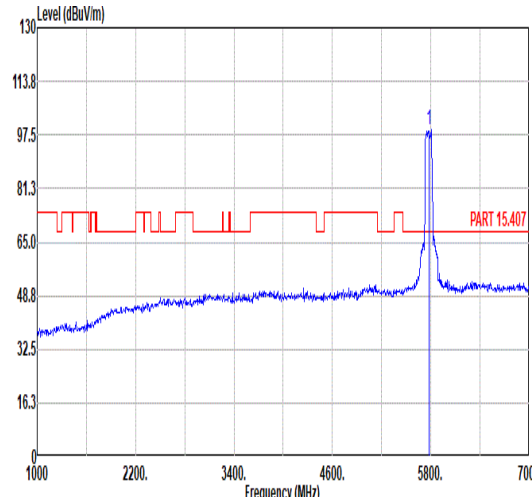
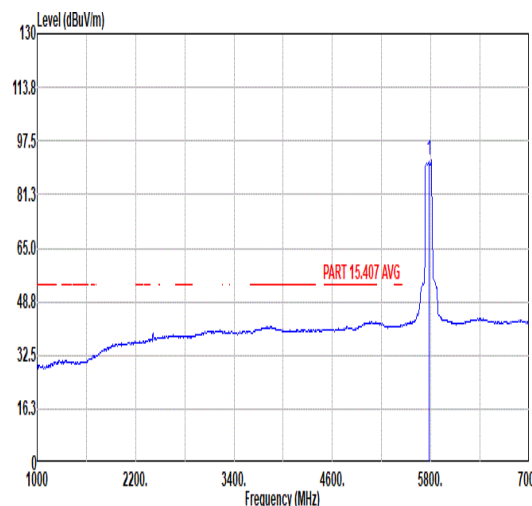


Mode	4																																																																																																																														
	Band Edge - R																																																																																																																														
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																														
ANT	1																																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																																								
Peak																																																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5854.80</td><td>62.82</td><td>111.26</td><td>-48.44</td><td>48.88</td><td>35.88</td><td>10.46</td><td>32.40</td><td>103</td><td>122 PEAK</td></tr><tr><td>2</td><td>5866.88</td><td>64.56</td><td>107.47</td><td>-42.91</td><td>50.59</td><td>35.91</td><td>10.47</td><td>32.41</td><td>103</td><td>122 PEAK</td></tr><tr><td>3</td><td>5924.98</td><td>51.99</td><td>68.22</td><td>-16.23</td><td>37.89</td><td>36.03</td><td>10.53</td><td>32.46</td><td>103</td><td>122 PEAK</td></tr><tr><td>4</td><td>5949.65</td><td>53.44</td><td>68.30</td><td>-14.86</td><td>39.33</td><td>36.05</td><td>10.55</td><td>32.49</td><td>103</td><td>122 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.80	62.82	111.26	-48.44	48.88	35.88	10.46	32.40	103	122 PEAK	2	5866.88	64.56	107.47	-42.91	50.59	35.91	10.47	32.41	103	122 PEAK	3	5924.98	51.99	68.22	-16.23	37.89	36.03	10.53	32.46	103	122 PEAK	4	5949.65	53.44	68.30	-14.86	39.33	36.05	10.55	32.49	103	122 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>98.91</td><td>-----</td><td>-----</td><td>85.08</td><td>35.75</td><td>10.43</td><td>32.35</td><td>103</td><td>122 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	98.91	-----	-----	85.08	35.75	10.43	32.35	103
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1	5854.80	62.82	111.26	-48.44	48.88	35.88	10.46	32.40	103	122 PEAK																																																																																																																					
2	5866.88	64.56	107.47	-42.91	50.59	35.91	10.47	32.41	103	122 PEAK																																																																																																																					
3	5924.98	51.99	68.22	-16.23	37.89	36.03	10.53	32.46	103	122 PEAK																																																																																																																					
4	5949.65	53.44	68.30	-14.86	39.33	36.05	10.55	32.49	103	122 PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1	5775.00	98.91	-----	-----	85.08	35.75	10.43	32.35	103	122 PEAK																																																																																																																					
Avg	Blank																																																																																																																														
							<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>91.77</td><td>-----</td><td>-----</td><td>77.94</td><td>35.75</td><td>10.43</td><td>32.35</td><td>103</td><td>122 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	91.77	-----	-----	77.94	35.75	10.43	32.35	103	122 AVERAGE																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1	5775.00	91.77	-----	-----	77.94	35.75	10.43	32.35	103	122 AVERAGE																																																																																																																					

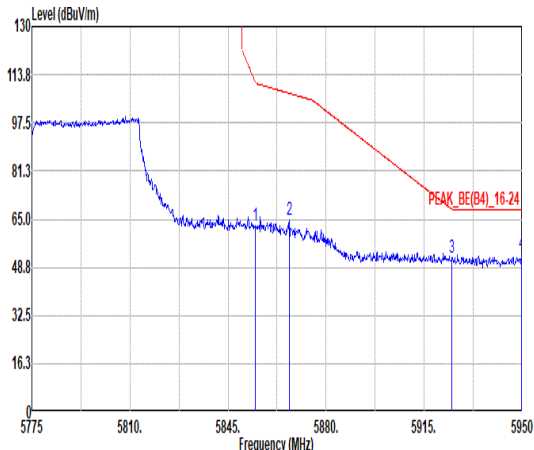


Mode	4																																																																													
	Band Edge - R																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																													
ANT	1																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.80</td><td>62.82</td><td>111.26</td><td>-48.44</td><td>48.88</td><td>35.88</td><td>10.46</td><td>32.40</td><td>103</td><td>122</td><td>PEAK</td></tr><tr><td>2</td><td>5866.88</td><td>64.56</td><td>107.47</td><td>-42.91</td><td>50.59</td><td>35.91</td><td>10.47</td><td>32.41</td><td>103</td><td>122</td><td>PEAK</td></tr><tr><td>3</td><td>5924.98</td><td>51.99</td><td>68.22</td><td>-16.23</td><td>37.89</td><td>36.03</td><td>10.53</td><td>32.46</td><td>103</td><td>122</td><td>PEAK</td></tr><tr><td>4</td><td>5949.65</td><td>53.44</td><td>68.30</td><td>-14.86</td><td>39.33</td><td>36.05</td><td>10.55</td><td>32.49</td><td>103</td><td>122</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.80	62.82	111.26	-48.44	48.88	35.88	10.46	32.40	103	122	PEAK	2	5866.88	64.56	107.47	-42.91	50.59	35.91	10.47	32.41	103	122	PEAK	3	5924.98	51.99	68.22	-16.23	37.89	36.03	10.53	32.46	103	122	PEAK	4	5949.65	53.44	68.30	-14.86	39.33	36.05	10.55	32.49	103	122	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5854.80	62.82	111.26	-48.44	48.88	35.88	10.46	32.40	103	122	PEAK																																																																			
2	5866.88	64.56	107.47	-42.91	50.59	35.91	10.47	32.41	103	122	PEAK																																																																			
3	5924.98	51.99	68.22	-16.23	37.89	36.03	10.53	32.46	103	122	PEAK																																																																			
4	5949.65	53.44	68.30	-14.86	39.33	36.05	10.55	32.49	103	122	PEAK																																																																			

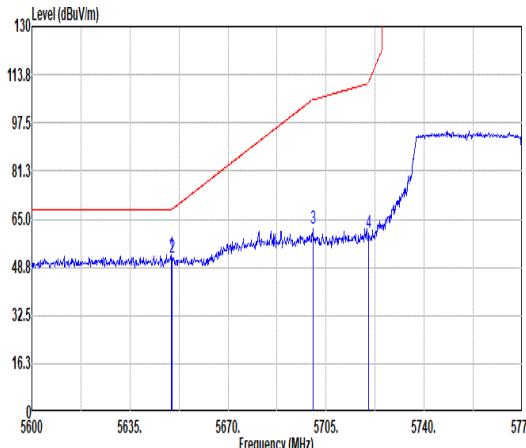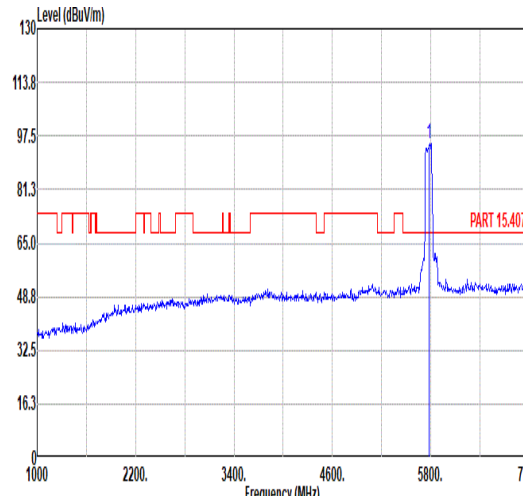
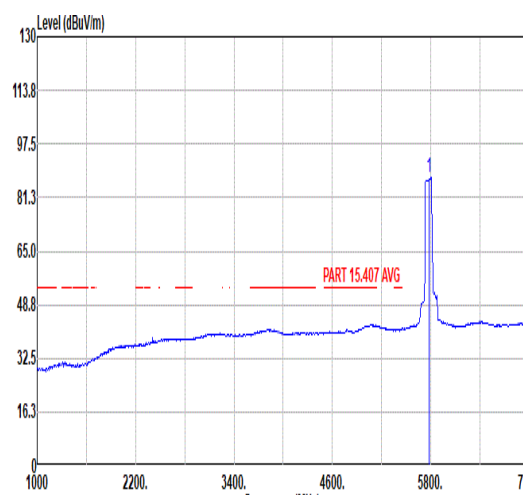


Mode	4																																																																																																																													
	Band Edge - L																																																																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																													
ANT	1																																																																																																																													
Pol.	Vertical						Fundamental																																																																																																																							
Peak																																																																																																																														
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5649.70</td><td>53.11</td><td>68.30</td><td>-15.19</td><td>39.69</td><td>35.40</td><td>10.33</td><td>32.31</td><td>103</td><td>356</td><td>PEAK</td></tr><tr><td>2</td><td>5650.05</td><td>51.81</td><td>68.34</td><td>-16.53</td><td>38.39</td><td>35.40</td><td>10.33</td><td>32.31</td><td>103</td><td>356</td><td>PEAK</td></tr><tr><td>3</td><td>5700.28</td><td>62.03</td><td>105.28</td><td>-43.25</td><td>48.50</td><td>35.52</td><td>10.36</td><td>32.35</td><td>103</td><td>356</td><td>PEAK</td></tr><tr><td>4</td><td>5720.05</td><td>60.32</td><td>110.91</td><td>-50.59</td><td>46.75</td><td>35.56</td><td>10.37</td><td>32.36</td><td>103</td><td>356</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5649.70	53.11	68.30	-15.19	39.69	35.40	10.33	32.31	103	356	PEAK	2	5650.05	51.81	68.34	-16.53	38.39	35.40	10.33	32.31	103	356	PEAK	3	5700.28	62.03	105.28	-43.25	48.50	35.52	10.36	32.35	103	356	PEAK	4	5720.05	60.32	110.91	-50.59	46.75	35.56	10.37	32.36	103	356	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>95.23</td><td>-----</td><td>-----</td><td>81.46</td><td>35.69</td><td>10.41</td><td>32.33</td><td>103</td><td>356</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	95.23	-----	-----	81.46	35.69	10.41	32.33	103	356
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1	5649.70	53.11	68.30	-15.19	39.69	35.40	10.33	32.31	103	356	PEAK																																																																																																																			
2	5650.05	51.81	68.34	-16.53	38.39	35.40	10.33	32.31	103	356	PEAK																																																																																																																			
3	5700.28	62.03	105.28	-43.25	48.50	35.52	10.36	32.35	103	356	PEAK																																																																																																																			
4	5720.05	60.32	110.91	-50.59	46.75	35.56	10.37	32.36	103	356	PEAK																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1	5775.00	95.23	-----	-----	81.46	35.69	10.41	32.33	103	356	PEAK																																																																																																																			
Avg	Blank																																																																																																																													
							<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>87.28</td><td>-----</td><td>-----</td><td>73.47</td><td>35.74</td><td>10.42</td><td>32.35</td><td>103</td><td>356</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	87.28	-----	-----	73.47	35.74	10.42	32.35	103	356	AVERAGE																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1	5775.00	87.28	-----	-----	73.47	35.74	10.42	32.35	103	356	AVERAGE																																																																																																																			




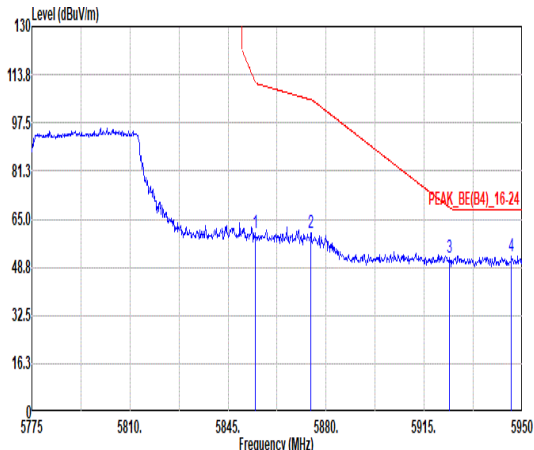


Mode	4																																																																													
	Band Edge - R																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																													
ANT	1																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.63</td><td>60.31</td><td>111.65</td><td>-51.34</td><td>46.37</td><td>35.88</td><td>10.46</td><td>32.40</td><td>103</td><td>356</td><td>PEAK</td></tr><tr><td>2</td><td>5874.58</td><td>60.28</td><td>105.32</td><td>-45.04</td><td>46.27</td><td>35.94</td><td>10.48</td><td>32.41</td><td>103</td><td>356</td><td>PEAK</td></tr><tr><td>3</td><td>5923.93</td><td>52.23</td><td>68.99</td><td>-16.76</td><td>38.14</td><td>36.03</td><td>10.52</td><td>32.46</td><td>103</td><td>356</td><td>PEAK</td></tr><tr><td>4</td><td>5946.15</td><td>52.40</td><td>68.30</td><td>-15.90</td><td>38.30</td><td>36.05</td><td>10.54</td><td>32.49</td><td>103</td><td>356</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.63	60.31	111.65	-51.34	46.37	35.88	10.46	32.40	103	356	PEAK	2	5874.58	60.28	105.32	-45.04	46.27	35.94	10.48	32.41	103	356	PEAK	3	5923.93	52.23	68.99	-16.76	38.14	36.03	10.52	32.46	103	356	PEAK	4	5946.15	52.40	68.30	-15.90	38.30	36.05	10.54	32.49	103	356	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5854.63	60.31	111.65	-51.34	46.37	35.88	10.46	32.40	103	356	PEAK																																																																			
2	5874.58	60.28	105.32	-45.04	46.27	35.94	10.48	32.41	103	356	PEAK																																																																			
3	5923.93	52.23	68.99	-16.76	38.14	36.03	10.52	32.46	103	356	PEAK																																																																			
4	5946.15	52.40	68.30	-15.90	38.30	36.05	10.54	32.49	103	356	PEAK																																																																			

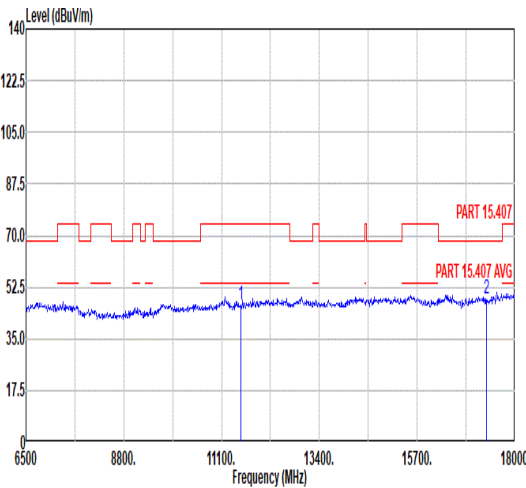
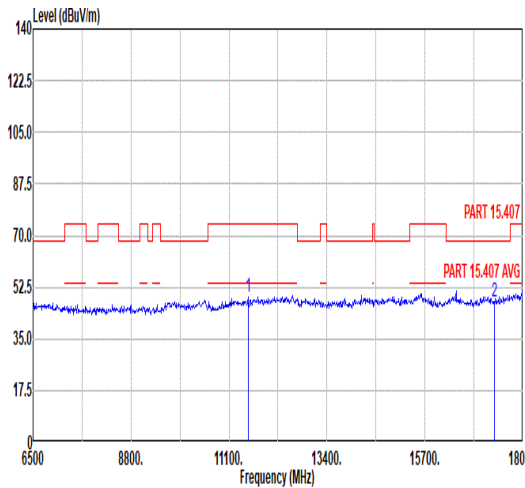


Mode	4																																																																																															
	Harmonic																																																																																															
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11550.00</td><td>46.29</td><td>74.00</td><td>-27.71</td><td>51.74</td><td>38.44</td><td>13.95</td></tr><tr><td>2</td><td>17325.00</td><td>48.37</td><td>68.30</td><td>-19.93</td><td>47.09</td><td>42.41</td><td>16.86</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11550.00	46.29	74.00	-27.71	51.74	38.44	13.95	2	17325.00	48.37	68.30	-19.93	47.09	42.41	16.86	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11550.00</td><td>49.32</td><td>74.00</td><td>-24.68</td><td>54.77</td><td>38.44</td><td>13.95</td></tr><tr><td>2</td><td>17325.00</td><td>47.41</td><td>68.30</td><td>-20.89</td><td>46.13</td><td>42.41</td><td>16.86</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11550.00	49.32	74.00	-24.68	54.77	38.44	13.95	2	17325.00	47.41	68.30	-20.89	46.13	42.41	16.86
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	11550.00	46.29	74.00	-27.71	51.74	38.44	13.95																																																																																									
2	17325.00	48.37	68.30	-19.93	47.09	42.41	16.86																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	11550.00	49.32	74.00	-24.68	54.77	38.44	13.95																																																																																									
2	17325.00	47.41	68.30	-20.89	46.13	42.41	16.86																																																																																									

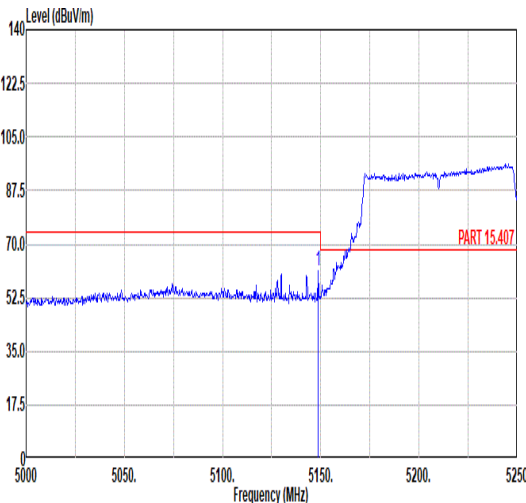
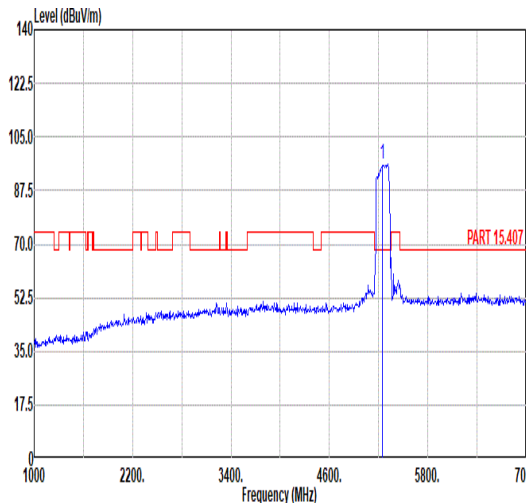
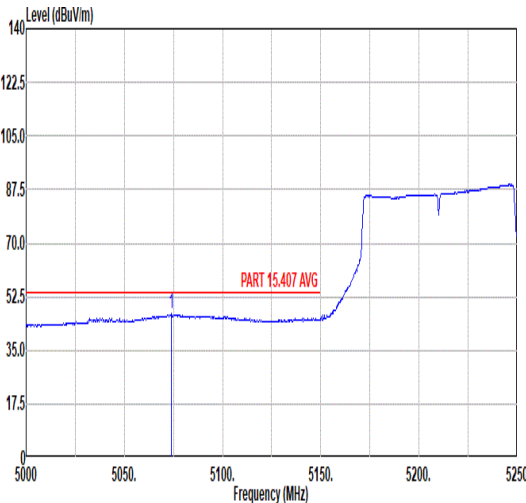
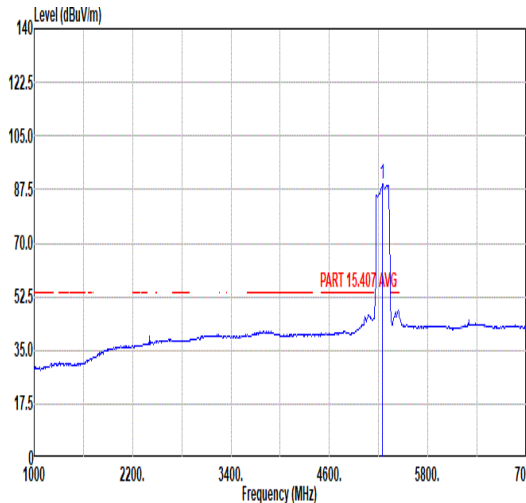


Mode	5																																																																																				
	Band Edge - L																																																																																				
	U-NII-1_5.15-5.25_802.11ac VHT160_CH50_5250MHz																																																																																				
ANT	1																																																																																				
Pol.	Horizontal					Fundamental																																																																															
Peak																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5148.75</td><td>61.28</td><td>74.00</td><td>-12.72</td><td>48.62</td><td>34.95</td><td>9.96</td><td>32.25</td><td>285 52 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5148.75	61.28	74.00	-12.72	48.62	34.95	9.96	32.25	285 52 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5250.00</td><td>96.33</td><td>-----</td><td>-----</td><td>83.15</td><td>35.20</td><td>10.16</td><td>32.18</td><td>285 52 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5250.00	96.33	-----	-----	83.15	35.20	10.16	32.18
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																												
1	5148.75	61.28	74.00	-12.72	48.62	34.95	9.96	32.25	285 52 PEAK																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																												
1	5250.00	96.33	-----	-----	83.15	35.20	10.16	32.18	285 52 PEAK																																																																												
Avg																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5073.75</td><td>46.84</td><td>54.00</td><td>-7.16</td><td>34.31</td><td>34.88</td><td>9.90</td><td>32.25</td><td>285 52 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5073.75	46.84	54.00	-7.16	34.31	34.88	9.90	32.25	285 52 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5250.00</td><td>89.15</td><td>-----</td><td>-----</td><td>76.17</td><td>35.11</td><td>10.07</td><td>32.20</td><td>285 52 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5250.00	89.15	-----	-----	76.17	35.11	10.07	32.20
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																												
1	5073.75	46.84	54.00	-7.16	34.31	34.88	9.90	32.25	285 52 AVERAGE																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																												
1	5250.00	89.15	-----	-----	76.17	35.11	10.07	32.20	285 52 AVERAGE																																																																												

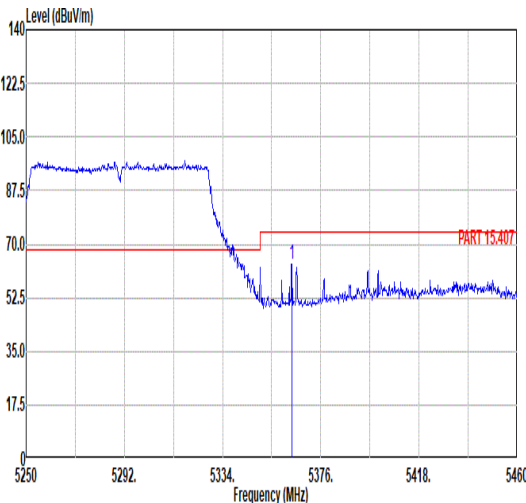
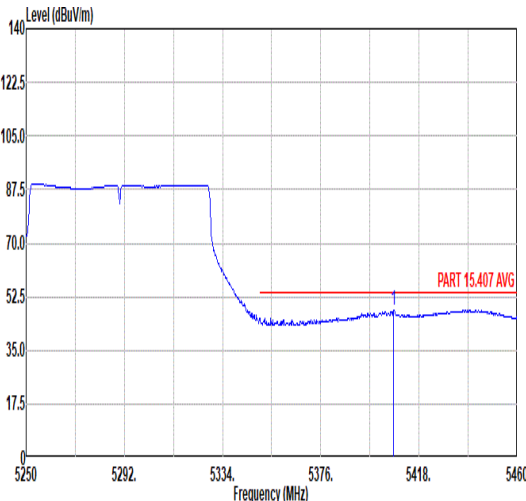


Mode	5																																																
	Band Edge - R																																																
	U-NII-1_5.15-5.25_802.11ac VHT160_CH50_5250MHz																																																
ANT	1																																																
Pol.	Horizontal					Fundamental																																											
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5363.61</td><td>63.28</td><td>74.00</td><td>-10.72</td><td>50.02</td><td>35.20</td><td>10.23</td><td>32.17</td><td>285</td><td>52 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5363.61	63.28	74.00	-10.72	50.02	35.20	10.23	32.17	285	52 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																								
1	5363.61	63.28	74.00	-10.72	50.02	35.20	10.23	32.17	285	52 PEAK																																							
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5407.08</td><td>48.07</td><td>54.00</td><td>-5.93</td><td>34.77</td><td>35.20</td><td>10.29</td><td>32.19</td><td>285</td><td>52 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5407.08	48.07	54.00	-5.93	34.77	35.20	10.29	32.19	285	52 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																								
1	5407.08	48.07	54.00	-5.93	34.77	35.20	10.29	32.19	285	52 AVERAGE																																							

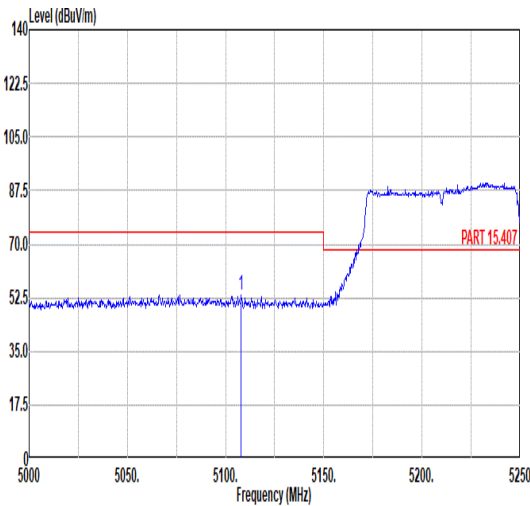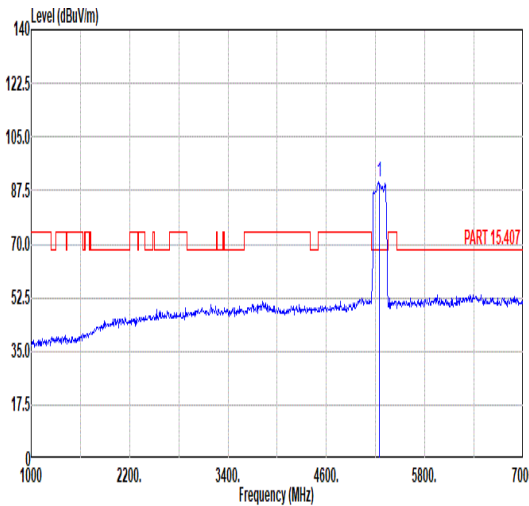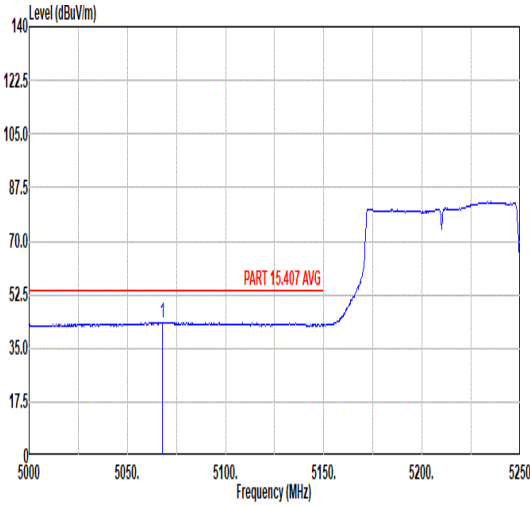
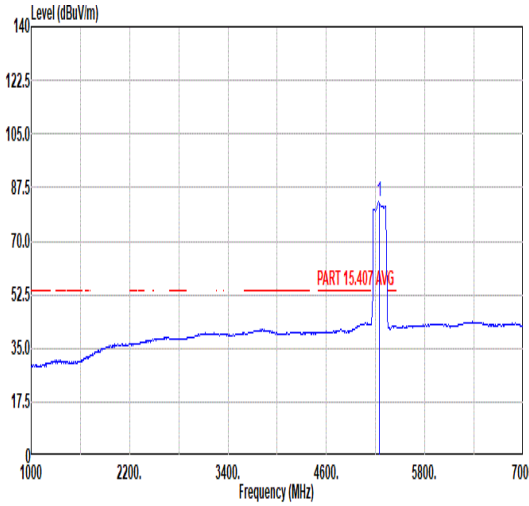


Mode	5																																																																																										
	Band Edge - L																																																																																										
	U-NII-1_5.15-5.25_802.11ac VHT160_CH50_5250MHz																																																																																										
ANT	1																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5108.00</td><td>53.22</td><td>74.00</td><td>-20.78</td><td>40.63</td><td>34.91</td><td>9.93</td><td>32.25</td><td>100</td><td>331</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5108.00	53.22	74.00	-20.78	40.63	34.91	9.93	32.25	100	331	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5250.00</td><td>90.59</td><td>-----</td><td>-----</td><td>77.68</td><td>35.07</td><td>10.04</td><td>32.20</td><td>100</td><td>331</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5250.00	90.59	-----	-----	77.68	35.07	10.04	32.20	100	331
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5108.00	53.22	74.00	-20.78	40.63	34.91	9.93	32.25	100	331	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5250.00	90.59	-----	-----	77.68	35.07	10.04	32.20	100	331	PEAK																																																																																
Avg																																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5068.00</td><td>43.45</td><td>54.00</td><td>-10.55</td><td>30.94</td><td>34.87</td><td>9.90</td><td>32.26</td><td>100</td><td>331</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5068.00	43.45	54.00	-10.55	30.94	34.87	9.90	32.26	100	331	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5250.00</td><td>82.77</td><td>-----</td><td>-----</td><td>69.86</td><td>35.07</td><td>10.04</td><td>32.20</td><td>100</td><td>331</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5250.00	82.77	-----	-----	69.86	35.07	10.04	32.20	100	331
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5068.00	43.45	54.00	-10.55	30.94	34.87	9.90	32.26	100	331	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5250.00	82.77	-----	-----	69.86	35.07	10.04	32.20	100	331	AVERAGE																																																																																



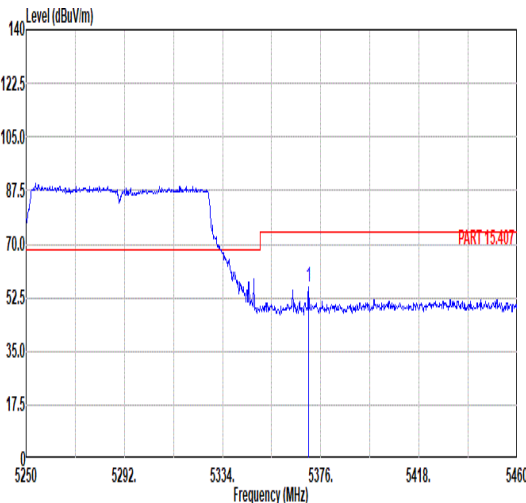
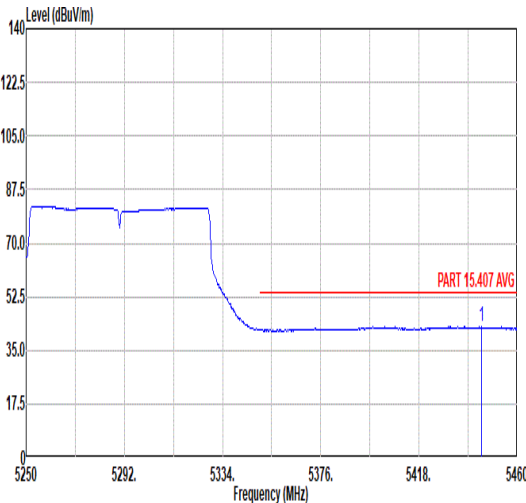


Mode	5																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11ac VHT160_CH50_5250MHz																																																		
ANT	1																																																		
Pol.	Vertical										Fundamental																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5370.75</td><td>55.81</td><td>74.00</td><td>-18.19</td><td>42.54</td><td>35.20</td><td>10.24</td><td>32.17</td><td>100</td><td>331</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5370.75	55.81	74.00	-18.19	42.54	35.20	10.24	32.17	100	331	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5370.75	55.81	74.00	-18.19	42.54	35.20	10.24	32.17	100	331	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5444.67</td><td>42.80</td><td>54.00</td><td>-11.20</td><td>29.56</td><td>35.20</td><td>10.29</td><td>32.25</td><td>100</td><td>331</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5444.67	42.80	54.00	-11.20	29.56	35.20	10.29	32.25	100	331	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5444.67	42.80	54.00	-11.20	29.56	35.20	10.29	32.25	100	331	AVERAGE																																								

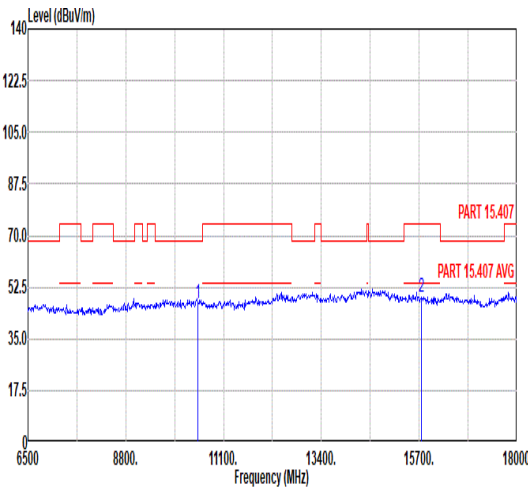
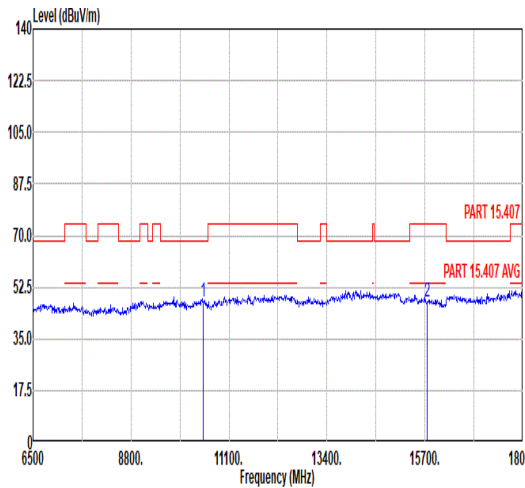


Mode	5																																																																					
	Harmonic																																																																					
	U-NII-1_5.15-5.25_802.11ac VHT160_CH50_5250MHz																																																																					
ANT	1																																																																					
Pol.	Horizontal																																																																					
Peak Avg																																																																						
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 10500.00</td><td>47.04</td><td>68.30</td><td>-21.26</td><td>56.05</td><td>37.30</td><td>13.39</td><td>59.70</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>2 15750.00</td><td>49.06</td><td>74.00</td><td>-24.94</td><td>51.18</td><td>40.35</td><td>15.88</td><td>58.35</td><td>--</td><td>--</td><td>Peak</td><td></td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 10500.00	47.04	68.30	-21.26	56.05	37.30	13.39	59.70	--	--	Peak		2 15750.00	49.06	74.00	-24.94	51.18	40.35	15.88	58.35	--	--	Peak	
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																													
1 10500.00	47.04	68.30	-21.26	56.05	37.30	13.39	59.70	--	--	Peak																																																												
2 15750.00	49.06	74.00	-24.94	51.18	40.35	15.88	58.35	--	--	Peak																																																												
Vertical																																																																						
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 10500.00</td><td>47.66</td><td>68.30</td><td>-20.64</td><td>56.67</td><td>37.30</td><td>13.39</td><td>59.70</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>2 15750.00</td><td>47.43</td><td>74.00</td><td>-26.57</td><td>49.55</td><td>40.35</td><td>15.88</td><td>58.35</td><td>--</td><td>--</td><td>Peak</td><td></td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 10500.00	47.66	68.30	-20.64	56.67	37.30	13.39	59.70	--	--	Peak		2 15750.00	47.43	74.00	-26.57	49.55	40.35	15.88	58.35	--	--	Peak	
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																													
1 10500.00	47.66	68.30	-20.64	56.67	37.30	13.39	59.70	--	--	Peak																																																												
2 15750.00	47.43	74.00	-26.57	49.55	40.35	15.88	58.35	--	--	Peak																																																												

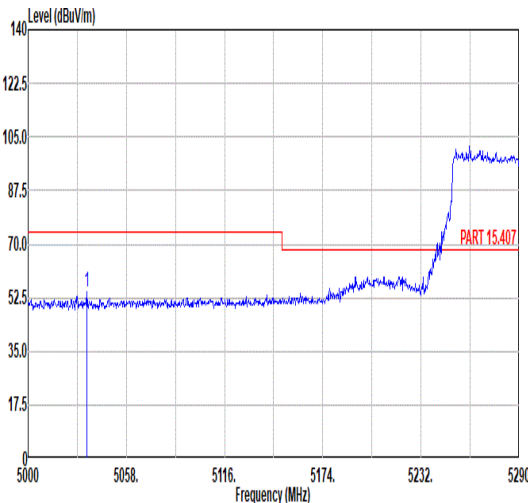
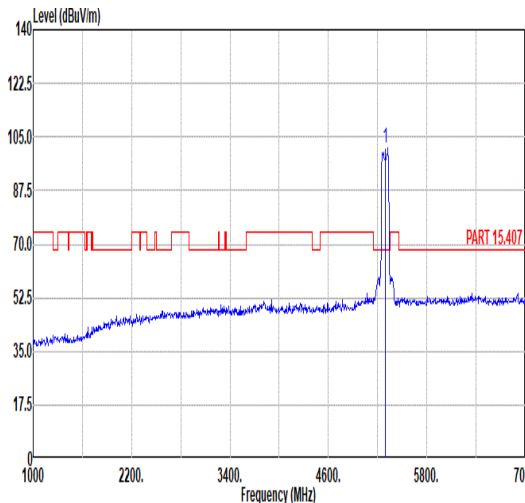
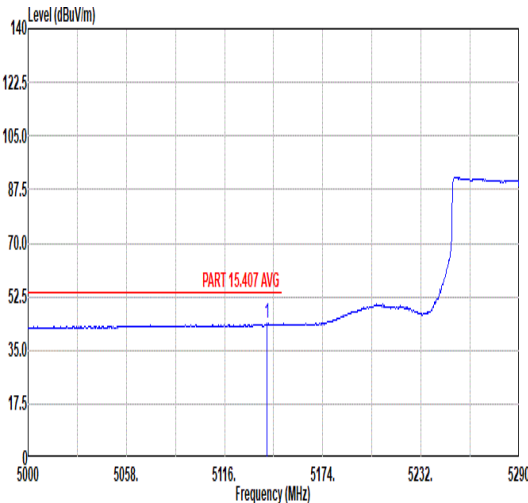
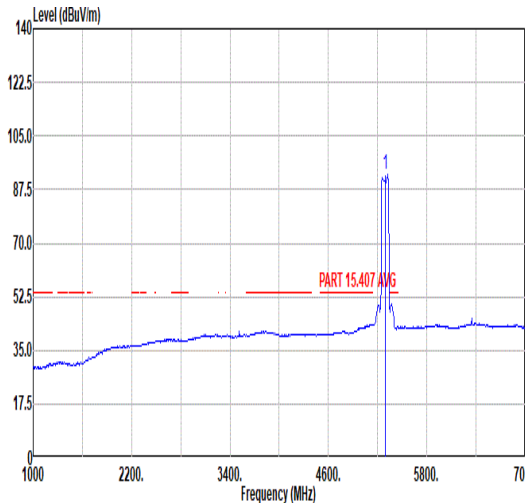


Mode	6																																																																																								
	Band Edge - L																																																																																								
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																																																								
ANT	1																																																																																								
Pol.	Horizontal					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5034.80</td><td>54.40</td><td>74.00</td><td>-19.60</td><td>41.94</td><td>34.84</td><td>9.88</td><td>32.26</td><td>338</td><td>45</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5034.80	54.40	74.00	-19.60	41.94	34.84	9.88	32.26	338	45	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5290.00</td><td>101.46</td><td>-----</td><td>-----</td><td>88.26</td><td>35.20</td><td>10.18</td><td>32.18</td><td>338</td><td>45</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5290.00	101.46	-----	-----	88.26	35.20	10.18	32.18	338	45
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1 5034.80	54.40	74.00	-19.60	41.94	34.84	9.88	32.26	338	45	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1 5290.00	101.46	-----	-----	88.26	35.20	10.18	32.18	338	45	PEAK																																																																															
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5140.94</td><td>43.64</td><td>54.00</td><td>-10.36</td><td>31.00</td><td>34.94</td><td>9.95</td><td>32.25</td><td>338</td><td>45</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5140.94	43.64	54.00	-10.36	31.00	34.94	9.95	32.25	338	45	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5290.00</td><td>92.20</td><td>-----</td><td>-----</td><td>79.00</td><td>35.20</td><td>10.18</td><td>32.18</td><td>338</td><td>45</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5290.00	92.20	-----	-----	79.00	35.20	10.18	32.18	338	45
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1 5140.94	43.64	54.00	-10.36	31.00	34.94	9.95	32.25	338	45	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1 5290.00	92.20	-----	-----	79.00	35.20	10.18	32.18	338	45	AVERAGE																																																																															

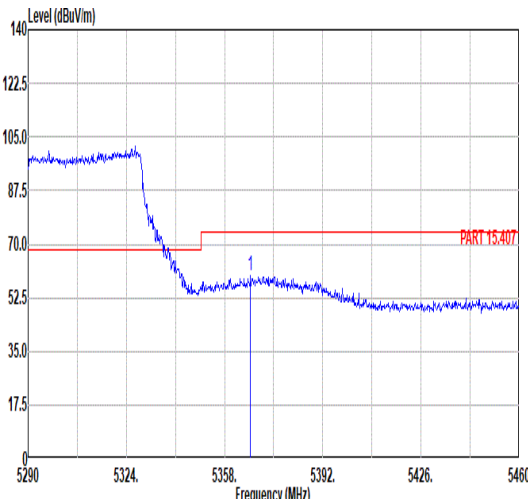
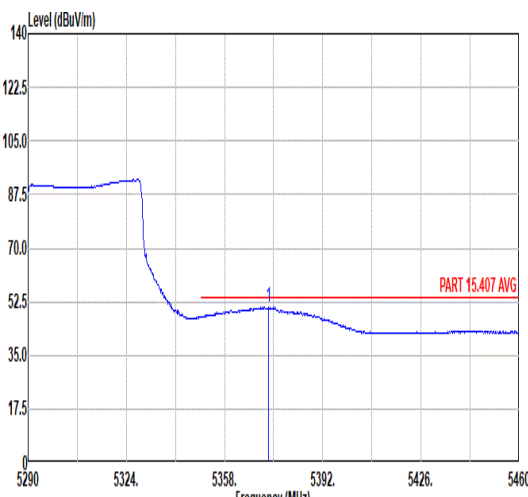


Mode	6																																																		
	Band Edge - R																																																		
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																		
ANT	1																																																		
Pol.	Horizontal										Fundamental																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5367.01</td><td>59.93</td><td>74.00</td><td>-14.07</td><td>46.66</td><td>35.20</td><td>10.24</td><td>32.17</td><td>338</td><td>45</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5367.01	59.93	74.00	-14.07	46.66	35.20	10.24	32.17	338	45	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5367.01	59.93	74.00	-14.07	46.66	35.20	10.24	32.17	338	45	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5373.13</td><td>50.75</td><td>54.00</td><td>-3.25</td><td>37.47</td><td>35.20</td><td>10.25</td><td>32.17</td><td>338</td><td>45</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5373.13	50.75	54.00	-3.25	37.47	35.20	10.25	32.17	338	45	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5373.13	50.75	54.00	-3.25	37.47	35.20	10.25	32.17	338	45	AVERAGE																																								

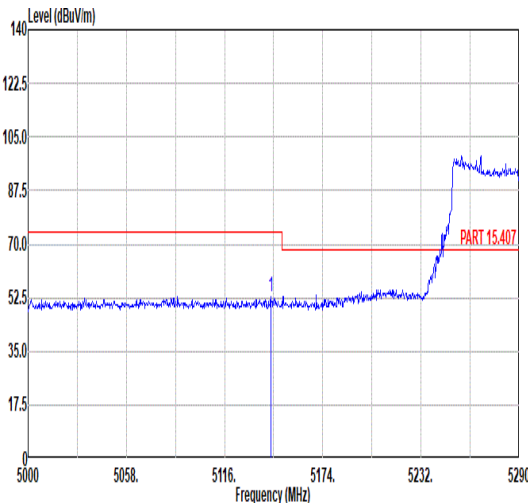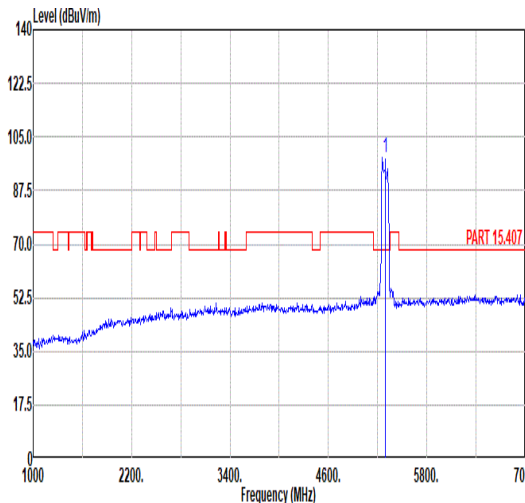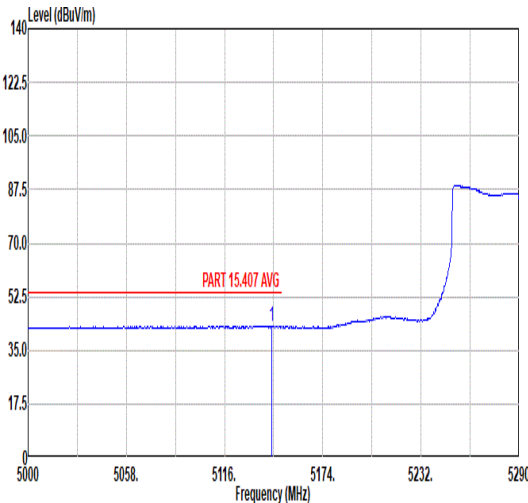
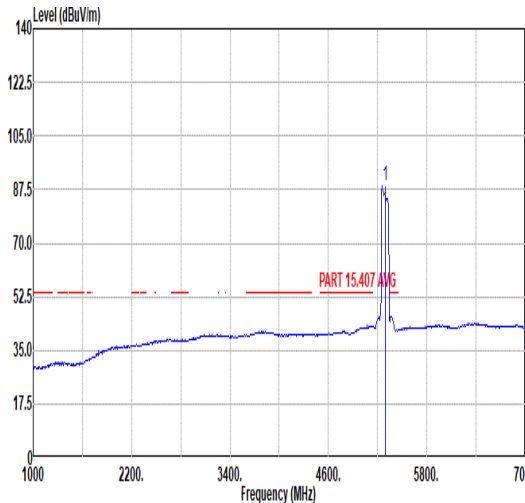


Mode	6																																																																																				
	Band Edge - L																																																																																				
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																																																				
ANT	1																																																																																				
Pol.	Vertical					Fundamental																																																																															
Peak																																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5143.26</td><td>52.86</td><td>74.00</td><td>-21.14</td><td>40.21</td><td>34.95</td><td>9.95</td><td>32.25</td><td>393 335 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5143.26	52.86	74.00	-21.14	40.21	34.95	9.95	32.25	393 335 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5290.00</td><td>98.37</td><td>-----</td><td>-----</td><td>85.37</td><td>35.12</td><td>10.08</td><td>32.20</td><td>393 335 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	98.37	-----	-----	85.37	35.12	10.08	32.20
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																												
1	5143.26	52.86	74.00	-21.14	40.21	34.95	9.95	32.25	393 335 PEAK																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																												
1	5290.00	98.37	-----	-----	85.37	35.12	10.08	32.20	393 335 PEAK																																																																												
Avg																																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5143.84</td><td>42.96</td><td>54.00</td><td>-11.04</td><td>30.31</td><td>34.95</td><td>9.95</td><td>32.25</td><td>393 335 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5143.84	42.96	54.00	-11.04	30.31	34.95	9.95	32.25	393 335 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5290.00</td><td>88.69</td><td>-----</td><td>-----</td><td>75.71</td><td>35.11</td><td>10.07</td><td>32.20</td><td>393 335 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	88.69	-----	-----	75.71	35.11	10.07	32.20
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																												
1	5143.84	42.96	54.00	-11.04	30.31	34.95	9.95	32.25	393 335 AVERAGE																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																												
1	5290.00	88.69	-----	-----	75.71	35.11	10.07	32.20	393 335 AVERAGE																																																																												



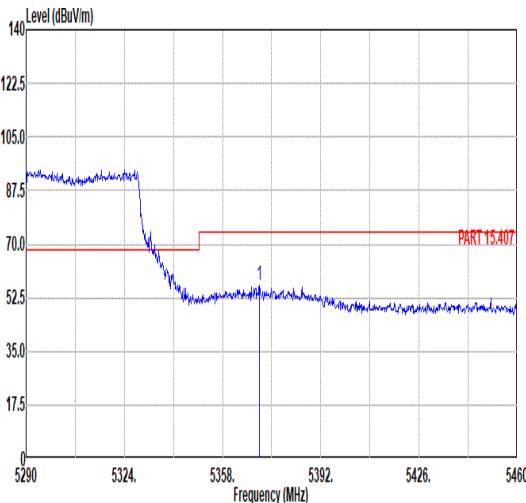
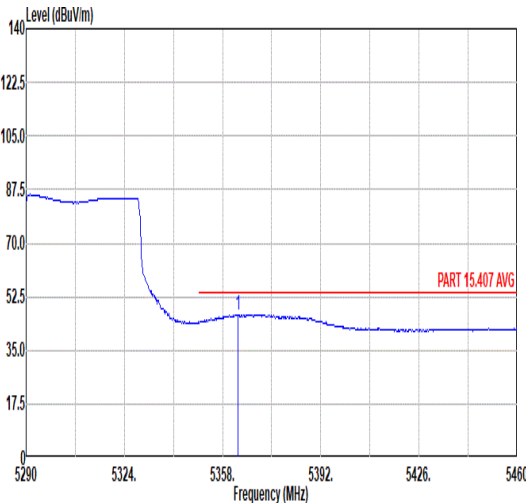


Mode	6																																																		
	Band Edge - R																																																		
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																		
ANT	1																																																		
Pol.	Vertical										Fundamental																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5370.75</td><td>56.55</td><td>74.00</td><td>-17.45</td><td>43.28</td><td>35.20</td><td>10.24</td><td>32.17</td><td>393</td><td>335</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5370.75	56.55	74.00	-17.45	43.28	35.20	10.24	32.17	393	335	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5370.75	56.55	74.00	-17.45	43.28	35.20	10.24	32.17	393	335	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5363.44</td><td>46.70</td><td>54.00</td><td>-7.30</td><td>33.44</td><td>35.20</td><td>10.23</td><td>32.17</td><td>393</td><td>335</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5363.44	46.70	54.00	-7.30	33.44	35.20	10.23	32.17	393	335	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5363.44	46.70	54.00	-7.30	33.44	35.20	10.23	32.17	393	335	AVERAGE																																								

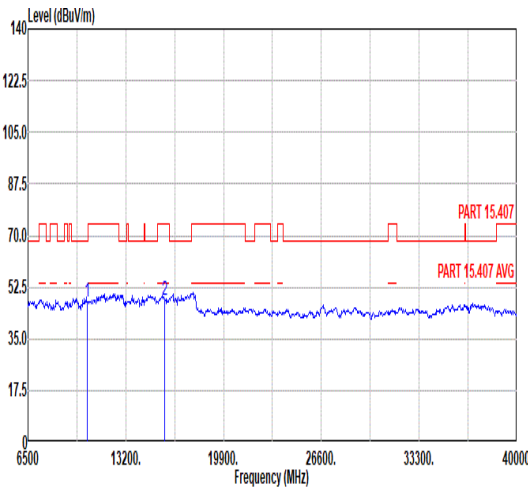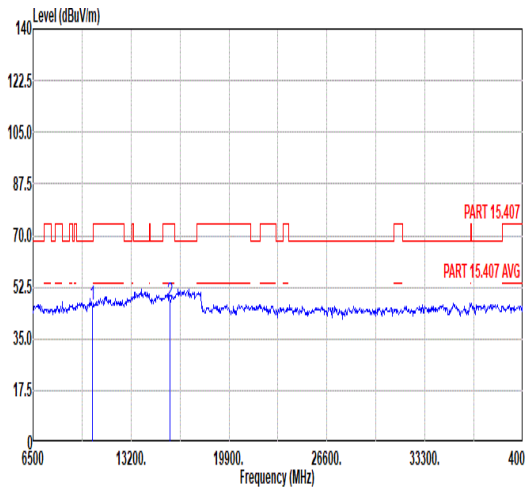


Mode	6																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>10580.00</td><td>47.62</td><td>68.30</td><td>-20.68</td><td>56.27</td><td>37.39</td><td>13.50</td><td>59.54</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15870.00</td><td>48.20</td><td>74.00</td><td>-25.80</td><td>50.41</td><td>40.42</td><td>15.98</td><td>58.61</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10580.00	47.62	68.30	-20.68	56.27	37.39	13.50	59.54	--	--	Peak	2	15870.00	48.20	74.00	-25.80	50.41	40.42	15.98	58.61	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>10580.00</td><td>46.67</td><td>68.30</td><td>-21.63</td><td>55.32</td><td>37.39</td><td>13.50</td><td>59.54</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15870.00</td><td>47.74</td><td>74.00</td><td>-26.26</td><td>49.95</td><td>40.42</td><td>15.98</td><td>58.61</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10580.00	46.67	68.30	-21.63	55.32	37.39	13.50	59.54	--	--	Peak	2	15870.00	47.74	74.00	-26.26	49.95	40.42	15.98	58.61	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	10580.00	47.62	68.30	-20.68	56.27	37.39	13.50	59.54	--	--	Peak																																																																																																																							
2	15870.00	48.20	74.00	-25.80	50.41	40.42	15.98	58.61	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	10580.00	46.67	68.30	-21.63	55.32	37.39	13.50	59.54	--	--	Peak																																																																																																																							
2	15870.00	47.74	74.00	-26.26	49.95	40.42	15.98	58.61	--	--	Peak																																																																																																																							

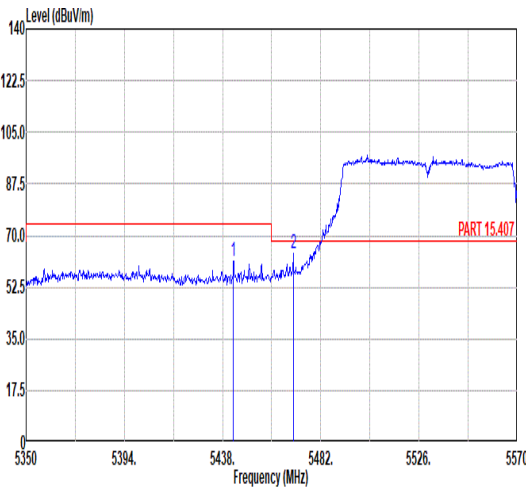
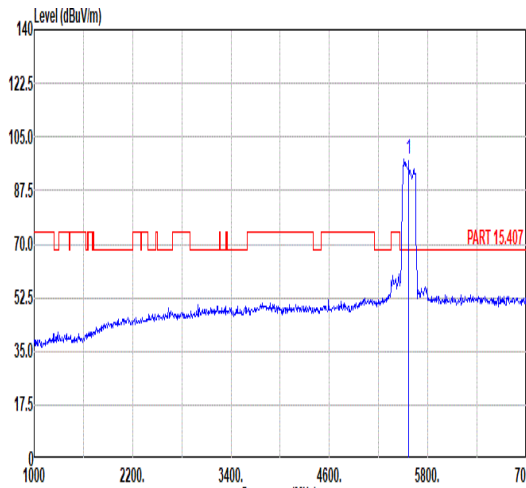
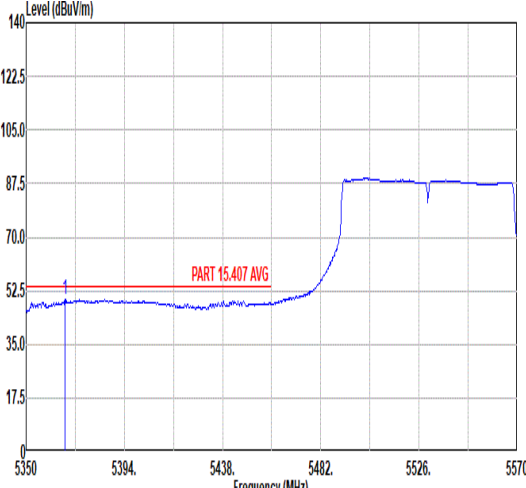
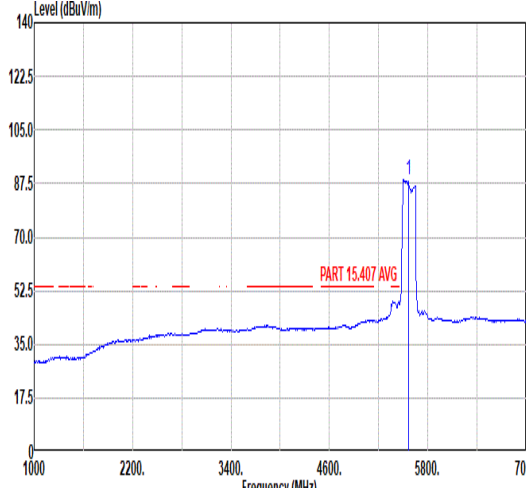


Mode	7																																																																																																						
	Band Edge - L																																																																																																						
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz																																																																																																						
ANT	1																																																																																																						
Pol.	Horizontal						Fundamental																																																																																																
Peak																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5442.84</td><td>61.31</td><td>74.00</td><td>-12.69</td><td>48.06</td><td>35.20</td><td>10.29</td><td>32.24</td><td>337</td><td>45</td><td>PEAK</td></tr><tr><td>2</td><td>5469.68</td><td>63.73</td><td>68.30</td><td>-4.57</td><td>50.49</td><td>35.20</td><td>10.30</td><td>32.26</td><td>337</td><td>45</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5442.84	61.31	74.00	-12.69	48.06	35.20	10.29	32.24	337	45	PEAK	2	5469.68	63.73	68.30	-4.57	50.49	35.20	10.30	32.26	337	45	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5570.00</td><td>97.56</td><td>-----</td><td>-----</td><td>84.32</td><td>35.21</td><td>10.30</td><td>32.27</td><td>337</td><td>45</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5570.00	97.56	-----	-----	84.32	35.21	10.30	32.27	337	45	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																														
1	5442.84	61.31	74.00	-12.69	48.06	35.20	10.29	32.24	337	45	PEAK																																																																																												
2	5469.68	63.73	68.30	-4.57	50.49	35.20	10.30	32.26	337	45	PEAK																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																														
1	5570.00	97.56	-----	-----	84.32	35.21	10.30	32.27	337	45	PEAK																																																																																												
Avg																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5367.38</td><td>49.77</td><td>54.00</td><td>-4.23</td><td>36.50</td><td>35.20</td><td>10.24</td><td>32.17</td><td>337</td><td>45</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5367.38	49.77	54.00	-4.23	36.50	35.20	10.24	32.17	337	45	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5570.00</td><td>88.78</td><td>-----</td><td>-----</td><td>75.55</td><td>35.20</td><td>10.30</td><td>32.27</td><td>337</td><td>45</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5570.00	88.78	-----	-----	75.55	35.20	10.30	32.27	337	45	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																														
1	5367.38	49.77	54.00	-4.23	36.50	35.20	10.24	32.17	337	45	AVERAGE																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																														
1	5570.00	88.78	-----	-----	75.55	35.20	10.30	32.27	337	45	AVERAGE																																																																																												

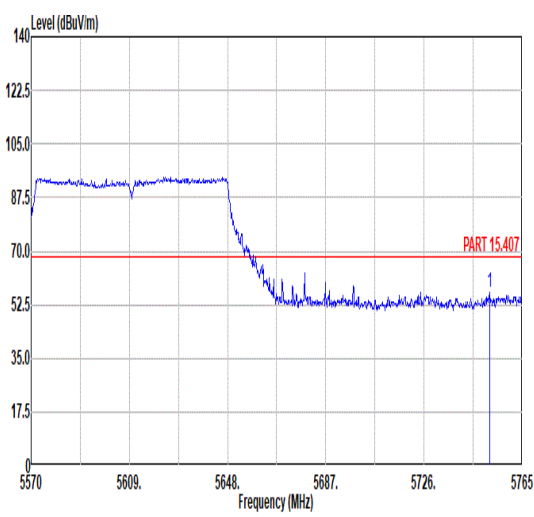


Mode	7																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz																																								
ANT	1																																								
Pol.	Horizontal	Fundamental																																							
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5752.13</td><td>56.52</td><td>68.30</td><td>-11.78</td><td>42.86</td><td>35.62</td><td>10.39</td><td>32.35</td><td>337</td><td>45</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5752.13	56.52	68.30	-11.78	42.86	35.62	10.39	32.35	337	45	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																
1	5752.13	56.52	68.30	-11.78	42.86	35.62	10.39	32.35	337	45	PEAK																														

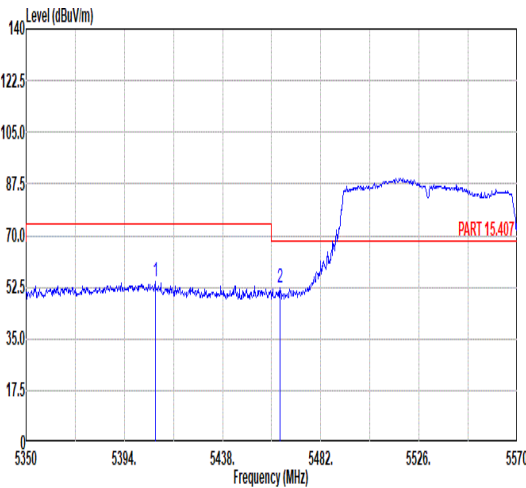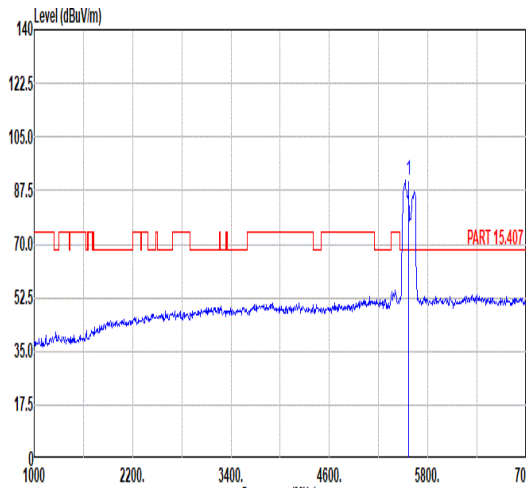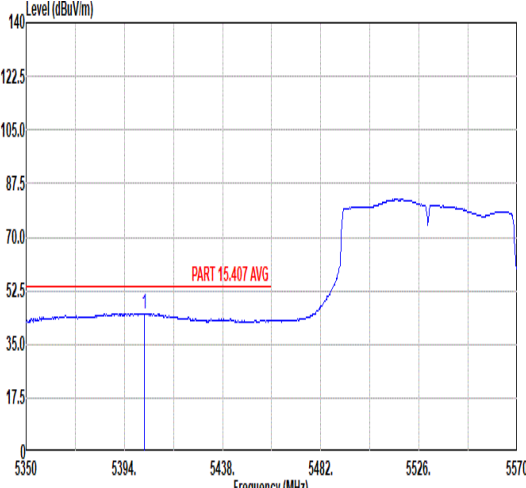
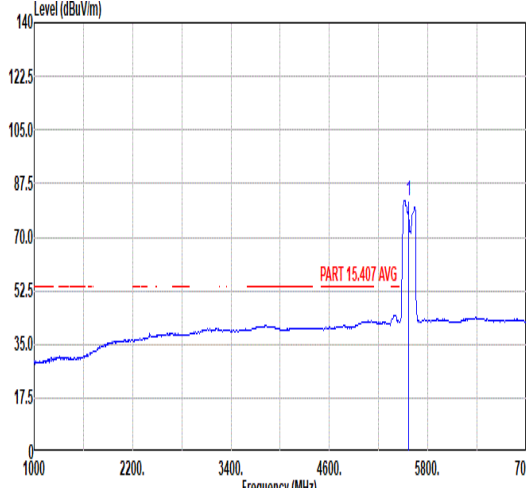


Mode	7																																																																																									
	Band Edge - L																																																																																									
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 5407.86</td><td>54.55</td><td>74.00</td><td>-19.45</td><td>41.25</td><td>35.20</td><td>10.29</td><td>32.19</td><td>389</td></tr><tr><td>2 5463.74</td><td>52.48</td><td>68.30</td><td>-15.82</td><td>39.24</td><td>35.20</td><td>10.30</td><td>32.26</td><td>389</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5407.86	54.55	74.00	-19.45	41.25	35.20	10.29	32.19	389	2 5463.74	52.48	68.30	-15.82	39.24	35.20	10.30	32.26	389	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 5570.00</td><td>90.63</td><td>-----</td><td>-----</td><td>77.39</td><td>35.22</td><td>10.30</td><td>32.28</td><td>389</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5570.00	90.63	-----	-----	77.39	35.22	10.30	32.28
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																		
1 5407.86	54.55	74.00	-19.45	41.25	35.20	10.29	32.19	389																																																																																		
2 5463.74	52.48	68.30	-15.82	39.24	35.20	10.30	32.26	389																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																		
1 5570.00	90.63	-----	-----	77.39	35.22	10.30	32.28	389																																																																																		
Avg																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 5402.80</td><td>45.08</td><td>54.00</td><td>-8.92</td><td>31.77</td><td>35.20</td><td>10.29</td><td>32.18</td><td>389</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5402.80	45.08	54.00	-8.92	31.77	35.20	10.29	32.18	389	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 5570.00</td><td>82.06</td><td>-----</td><td>-----</td><td>68.83</td><td>35.21</td><td>10.30</td><td>32.28</td><td>389</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5570.00	82.06	-----	-----	68.83	35.21	10.30	32.28	389								
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																		
1 5402.80	45.08	54.00	-8.92	31.77	35.20	10.29	32.18	389																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																		
1 5570.00	82.06	-----	-----	68.83	35.21	10.30	32.28	389																																																																																		



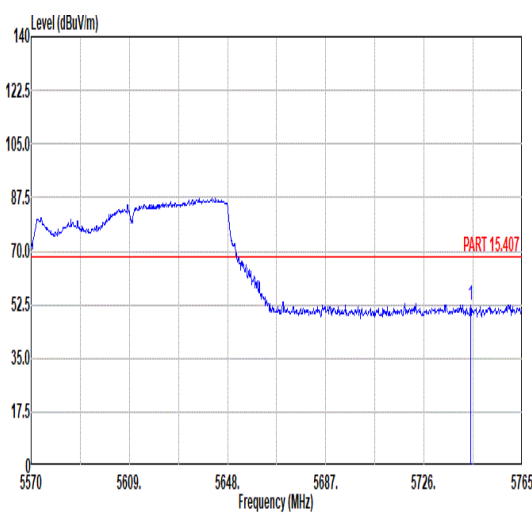


Mode	7																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz																																								
ANT	1																																								
Pol.	Vertical	Fundamental																																							
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5744.53</td><td>52.48</td><td>68.30</td><td>-15.82</td><td>38.86</td><td>35.60</td><td>10.38</td><td>32.36</td><td>389</td><td>326</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5744.53	52.48	68.30	-15.82	38.86	35.60	10.38	32.36	389	326	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1	5744.53	52.48	68.30	-15.82	38.86	35.60	10.38	32.36	389	326	PEAK																														

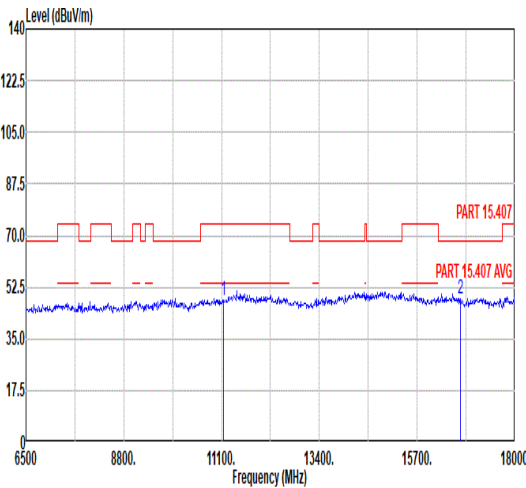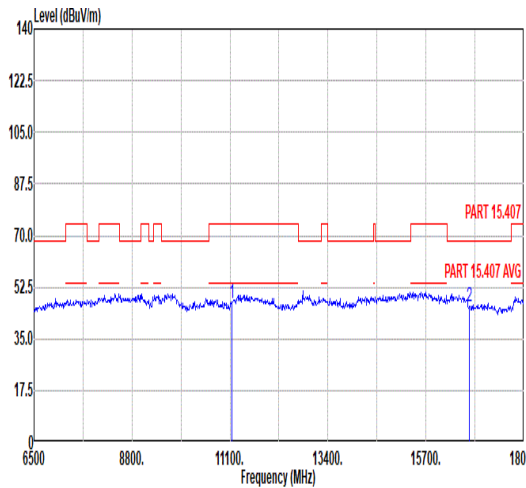


Mode	7																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11140.00</td><td>47.84</td><td>74.00</td><td>-26.16</td><td>54.53</td><td>38.04</td><td>13.72</td><td>58.45</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>16710.00</td><td>48.40</td><td>68.30</td><td>-19.90</td><td>48.03</td><td>41.84</td><td>16.56</td><td>58.03</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11140.00	47.84	74.00	-26.16	54.53	38.04	13.72	58.45	--	--	Peak	2	16710.00	48.40	68.30	-19.90	48.03	41.84	16.56	58.03	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11140.00</td><td>47.10</td><td>74.00</td><td>-26.90</td><td>53.79</td><td>38.04</td><td>13.72</td><td>58.45</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>16710.00</td><td>45.87</td><td>68.30</td><td>-22.43</td><td>45.50</td><td>41.84</td><td>16.56</td><td>58.03</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11140.00	47.10	74.00	-26.90	53.79	38.04	13.72	58.45	--	--	Peak	2	16710.00	45.87	68.30	-22.43	45.50	41.84	16.56	58.03	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11140.00	47.84	74.00	-26.16	54.53	38.04	13.72	58.45	--	--	Peak																																																																																																																							
2	16710.00	48.40	68.30	-19.90	48.03	41.84	16.56	58.03	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11140.00	47.10	74.00	-26.90	53.79	38.04	13.72	58.45	--	--	Peak																																																																																																																							
2	16710.00	45.87	68.30	-22.43	45.50	41.84	16.56	58.03	--	--	Peak																																																																																																																							

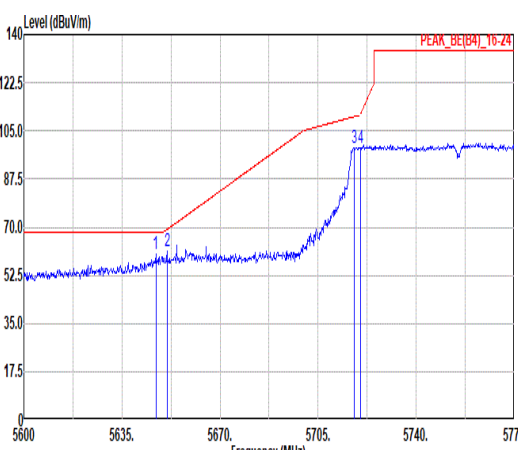
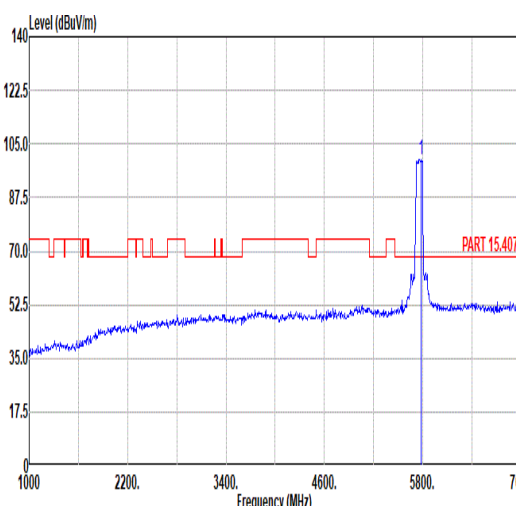
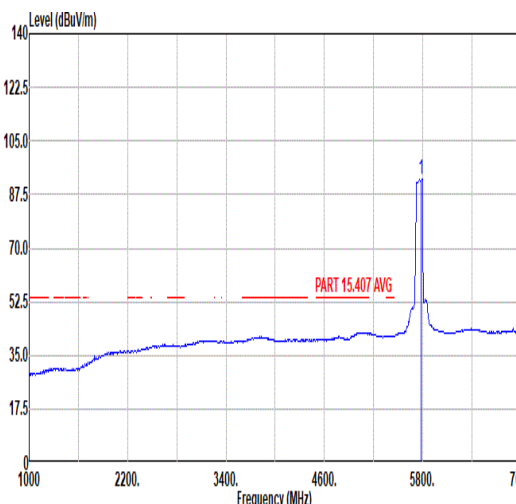


Mode	8																																																																																																																					
	Band Edge - L																																																																																																																					
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																					
ANT	1																																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																																				
Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5647.08</td><td>60.22</td><td>68.30</td><td>-8.08</td><td>46.81</td><td>35.39</td><td>10.33</td><td>32.31</td><td>168</td><td>136</td><td>PEAK</td></tr><tr><td>2</td><td>5651.10</td><td>61.09</td><td>69.12</td><td>-8.03</td><td>47.67</td><td>35.40</td><td>10.33</td><td>32.31</td><td>168</td><td>136</td><td>PEAK</td></tr><tr><td>3</td><td>5717.78</td><td>98.75</td><td>110.18</td><td>-11.43</td><td>85.19</td><td>35.55</td><td>10.37</td><td>32.36</td><td>168</td><td>136</td><td>PEAK</td></tr><tr><td>4</td><td>5720.05</td><td>98.56</td><td>110.91</td><td>-12.35</td><td>84.99</td><td>35.56</td><td>10.37</td><td>32.36</td><td>168</td><td>136</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5647.08	60.22	68.30	-8.08	46.81	35.39	10.33	32.31	168	136	PEAK	2	5651.10	61.09	69.12	-8.03	47.67	35.40	10.33	32.31	168	136	PEAK	3	5717.78	98.75	110.18	-11.43	85.19	35.55	10.37	32.36	168	136	PEAK	4	5720.05	98.56	110.91	-12.35	84.99	35.56	10.37	32.36	168	136	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>99.97</td><td>-----</td><td>-----</td><td>86.25</td><td>35.66</td><td>10.40</td><td>32.34</td><td>168</td><td>136</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	99.97	-----	-----	86.25	35.66	10.40	32.34	168	136	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5647.08	60.22	68.30	-8.08	46.81	35.39	10.33	32.31	168	136	PEAK																																																																																																											
2	5651.10	61.09	69.12	-8.03	47.67	35.40	10.33	32.31	168	136	PEAK																																																																																																											
3	5717.78	98.75	110.18	-11.43	85.19	35.55	10.37	32.36	168	136	PEAK																																																																																																											
4	5720.05	98.56	110.91	-12.35	84.99	35.56	10.37	32.36	168	136	PEAK																																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5775.00	99.97	-----	-----	86.25	35.66	10.40	32.34	168	136	PEAK																																																																																																											
Avg	Blank	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>92.69</td><td>-----</td><td>-----</td><td>78.91</td><td>35.70</td><td>10.41</td><td>32.33</td><td>168</td><td>136</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	92.69	-----	-----	78.91	35.70	10.41	32.33	168	136	AVERAGE																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5775.00	92.69	-----	-----	78.91	35.70	10.41	32.33	168	136	AVERAGE																																																																																																											

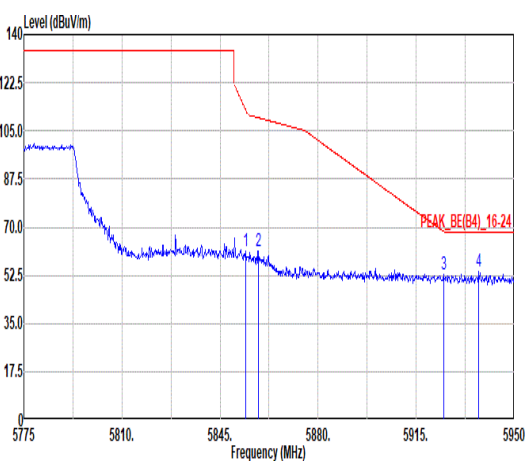


Mode	8																																																																													
	Band Edge - R																																																																													
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																													
ANT	1																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5854.10</td><td>61.47</td><td>112.85</td><td>-51.38</td><td>47.53</td><td>35.88</td><td>10.46</td><td>32.40</td><td>168</td><td>136</td><td>PEAK</td></tr><tr><td>2</td><td>5858.65</td><td>61.39</td><td>109.78</td><td>-48.39</td><td>47.44</td><td>35.89</td><td>10.47</td><td>32.41</td><td>168</td><td>136</td><td>PEAK</td></tr><tr><td>3</td><td>5924.80</td><td>52.92</td><td>68.35</td><td>-15.43</td><td>38.82</td><td>36.03</td><td>10.53</td><td>32.46</td><td>168</td><td>136</td><td>PEAK</td></tr><tr><td>4</td><td>5937.40</td><td>54.10</td><td>68.30</td><td>-14.20</td><td>40.00</td><td>36.04</td><td>10.54</td><td>32.48</td><td>168</td><td>136</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5854.10	61.47	112.85	-51.38	47.53	35.88	10.46	32.40	168	136	PEAK	2	5858.65	61.39	109.78	-48.39	47.44	35.89	10.47	32.41	168	136	PEAK	3	5924.80	52.92	68.35	-15.43	38.82	36.03	10.53	32.46	168	136	PEAK	4	5937.40	54.10	68.30	-14.20	40.00	36.04	10.54	32.48	168	136	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1	5854.10	61.47	112.85	-51.38	47.53	35.88	10.46	32.40	168	136	PEAK																																																																			
2	5858.65	61.39	109.78	-48.39	47.44	35.89	10.47	32.41	168	136	PEAK																																																																			
3	5924.80	52.92	68.35	-15.43	38.82	36.03	10.53	32.46	168	136	PEAK																																																																			
4	5937.40	54.10	68.30	-14.20	40.00	36.04	10.54	32.48	168	136	PEAK																																																																			

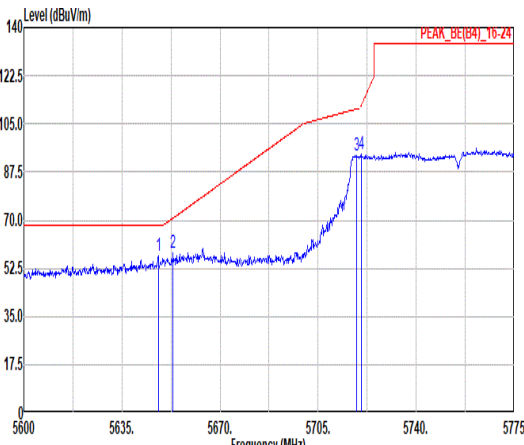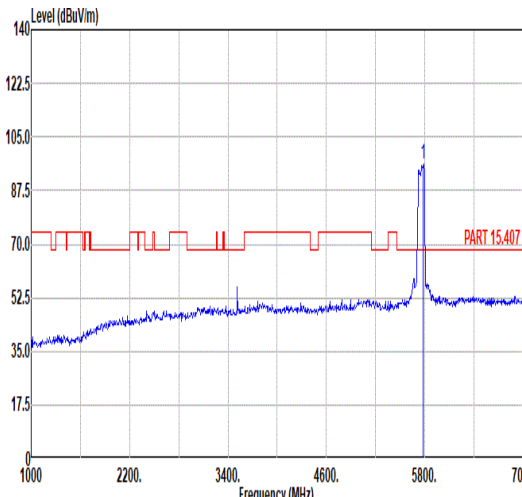
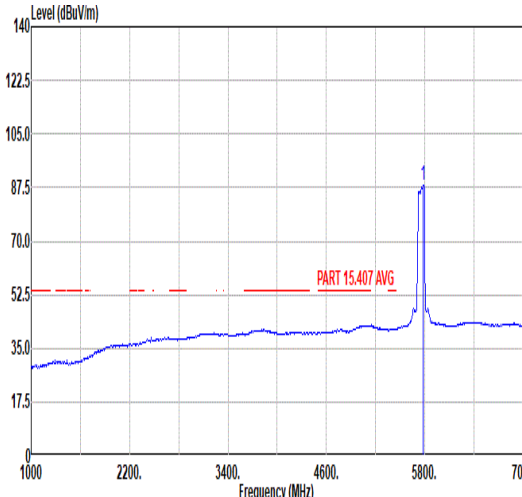


Mode	8																																																																																																																					
	Band Edge - L																																																																																																																					
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																					
ANT	1																																																																																																																					
Pol.	Vertical	Fundamental																																																																																																																				
Peak	 Vertical Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a rising red line and a blue trace with peaks. Peaks are labeled 1, 2, and 34. A red label 'PEAK_BE(BA)_Y0-Z4' is present. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5647.95</td><td>56.83</td><td>68.30</td><td>-11.47</td><td>43.41</td><td>35.40</td><td>10.33</td><td>32.31</td><td>385</td><td>157</td><td>PEAK</td></tr><tr><td>2</td><td>5653.20</td><td>58.13</td><td>70.67</td><td>-12.54</td><td>44.71</td><td>35.41</td><td>10.33</td><td>32.32</td><td>385</td><td>157</td><td>PEAK</td></tr><tr><td>3</td><td>5718.65</td><td>93.70</td><td>110.42</td><td>-16.72</td><td>80.14</td><td>35.55</td><td>10.37</td><td>32.36</td><td>385</td><td>157</td><td>PEAK</td></tr><tr><td>4</td><td>5720.40</td><td>94.21</td><td>111.71</td><td>-17.50</td><td>80.64</td><td>35.56</td><td>10.37</td><td>32.36</td><td>385</td><td>157</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5647.95	56.83	68.30	-11.47	43.41	35.40	10.33	32.31	385	157	PEAK	2	5653.20	58.13	70.67	-12.54	44.71	35.41	10.33	32.32	385	157	PEAK	3	5718.65	93.70	110.42	-16.72	80.14	35.55	10.37	32.36	385	157	PEAK	4	5720.40	94.21	111.71	-17.50	80.64	35.56	10.37	32.36	385	157	PEAK	 Fundamental Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a blue trace with a sharp peak at 5775 MHz. A red label 'PART 15.407' is present. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>95.96</td><td>-----</td><td>-----</td><td>82.19</td><td>35.69</td><td>10.41</td><td>32.33</td><td>385</td><td>157</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	95.96	-----	-----	82.19	35.69	10.41	32.33	385	157	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5647.95	56.83	68.30	-11.47	43.41	35.40	10.33	32.31	385	157	PEAK																																																																																																											
2	5653.20	58.13	70.67	-12.54	44.71	35.41	10.33	32.32	385	157	PEAK																																																																																																											
3	5718.65	93.70	110.42	-16.72	80.14	35.55	10.37	32.36	385	157	PEAK																																																																																																											
4	5720.40	94.21	111.71	-17.50	80.64	35.56	10.37	32.36	385	157	PEAK																																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5775.00	95.96	-----	-----	82.19	35.69	10.41	32.33	385	157	PEAK																																																																																																											
Avg	Blank	 Fundamental Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot displays a blue trace with a sharp peak at 5775 MHz. A red label 'PART 15.407 AVG' is present. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>88.29</td><td>-----</td><td>-----</td><td>74.52</td><td>35.69</td><td>10.41</td><td>32.33</td><td>385</td><td>157</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	88.29	-----	-----	74.52	35.69	10.41	32.33	385	157	AVERAGE																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																													
1	5775.00	88.29	-----	-----	74.52	35.69	10.41	32.33	385	157	AVERAGE																																																																																																											




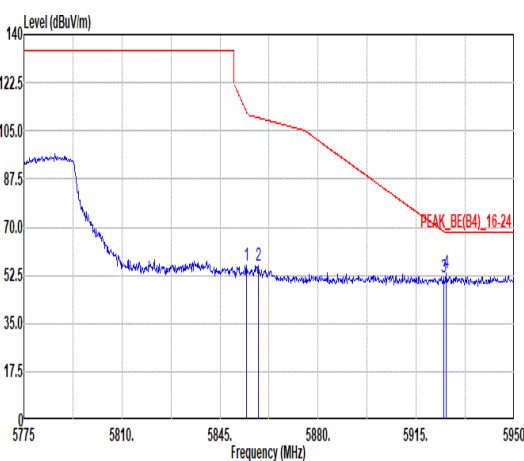


Mode	8																																																									
	Band Edge - R																																																									
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																									
ANT	1																																																									
Pol.	Vertical	Fundamental																																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>5854.45</td><td>55.97</td><td>112.05</td><td>-56.08</td><td>42.03</td><td>35.88</td><td>10.46</td></tr><tr><td>2</td><td>5858.65</td><td>56.16</td><td>109.78</td><td>-53.62</td><td>42.21</td><td>35.89</td><td>10.47</td></tr><tr><td>3</td><td>5924.98</td><td>52.02</td><td>68.22</td><td>-16.20</td><td>37.92</td><td>36.03</td><td>10.53</td></tr><tr><td>4</td><td>5925.68</td><td>53.53</td><td>68.30</td><td>-14.77</td><td>39.43</td><td>36.03</td><td>10.53</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.45	55.97	112.05	-56.08	42.03	35.88	10.46	2	5858.65	56.16	109.78	-53.62	42.21	35.89	10.47	3	5924.98	52.02	68.22	-16.20	37.92	36.03	10.53	4	5925.68	53.53	68.30	-14.77	39.43	36.03	10.53	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																			
1	5854.45	55.97	112.05	-56.08	42.03	35.88	10.46																																																			
2	5858.65	56.16	109.78	-53.62	42.21	35.89	10.47																																																			
3	5924.98	52.02	68.22	-16.20	37.92	36.03	10.53																																																			
4	5925.68	53.53	68.30	-14.77	39.43	36.03	10.53																																																			

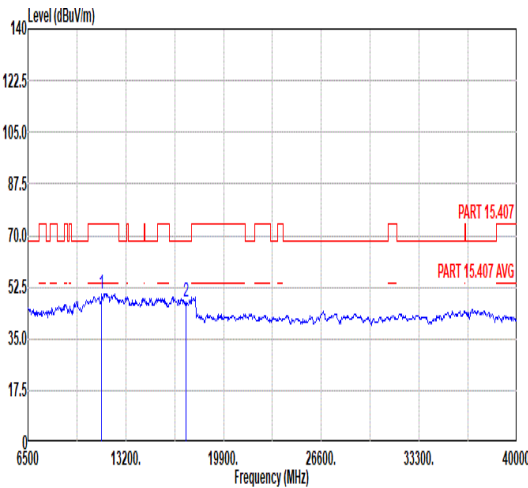
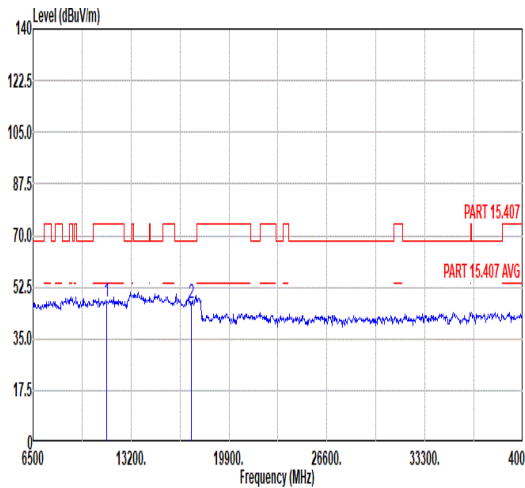


Mode	8																																																																																																				
	Harmonic																																																																																																				
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Horizontal												Vertical																																																																																								
Peak Avg																																																																																																					
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable</th><th colspan="2">Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="5">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th><th colspan="3"></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="2"></th><th colspan="2"></th><th colspan="3"></th></tr><tr><td>1</td><td>11550.00</td><td>49.98</td><td>74.00</td><td>-24.02</td><td>55.43</td><td>38.44</td><td>13.95</td><td>57.84</td><td>--</td><td>--</td><td>Peak</td><td colspan="2"></td><td colspan="3"></td></tr><tr><td>2</td><td>17325.00</td><td>47.51</td><td>68.30</td><td>-20.79</td><td>46.23</td><td>42.41</td><td>16.86</td><td>57.99</td><td>--</td><td>--</td><td>Peak</td><td colspan="2"></td><td colspan="3"></td></tr></table>																		Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Loss	Factor	cm	deg				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg								1	11550.00	49.98	74.00	-24.02	55.43	38.44	13.95	57.84	--	--	Peak						2	17325.00	47.51	68.30	-20.79	46.23	42.41	16.86	57.99	--	--	Peak					
			Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark																																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Loss	Factor	cm	deg																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	11550.00	49.98	74.00	-24.02	55.43	38.44	13.95	57.84	--	--	Peak																																																																																										
2	17325.00	47.51	68.30	-20.79	46.23	42.41	16.86	57.99	--	--	Peak																																																																																										
																																																																																																					
<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable</th><th colspan="2">Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="5">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th><th colspan="3"></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="2"></th><th colspan="2"></th><th colspan="3"></th></tr><tr><td>1</td><td>11550.00</td><td>47.70</td><td>74.00</td><td>-26.30</td><td>53.15</td><td>38.44</td><td>13.95</td><td>57.84</td><td>--</td><td>--</td><td>Peak</td><td colspan="2"></td><td colspan="3"></td></tr><tr><td>2</td><td>17325.00</td><td>47.20</td><td>68.30</td><td>-21.10</td><td>45.92</td><td>42.41</td><td>16.86</td><td>57.99</td><td>--</td><td>--</td><td>Peak</td><td colspan="2"></td><td colspan="3"></td></tr></table>																		Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Loss	Factor	cm	deg				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg								1	11550.00	47.70	74.00	-26.30	53.15	38.44	13.95	57.84	--	--	Peak						2	17325.00	47.20	68.30	-21.10	45.92	42.41	16.86	57.99	--	--	Peak						
		Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Loss	Factor	cm	deg																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	11550.00	47.70	74.00	-26.30	53.15	38.44	13.95	57.84	--	--	Peak																																																																																										
2	17325.00	47.20	68.30	-21.10	45.92	42.41	16.86	57.99	--	--	Peak																																																																																										

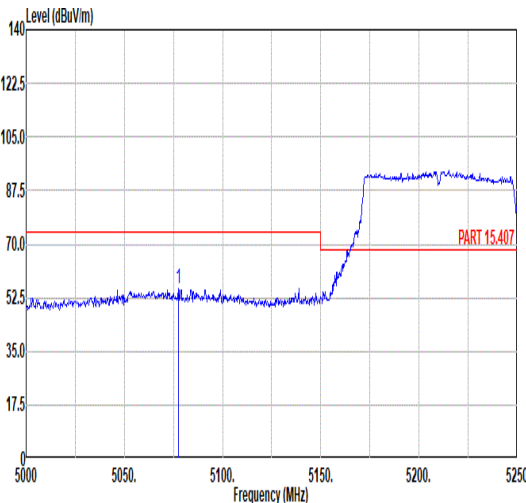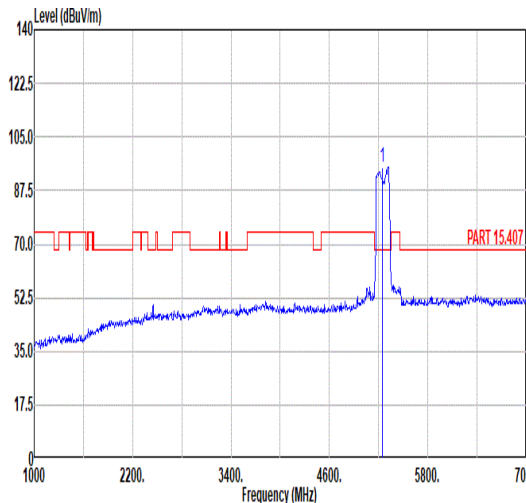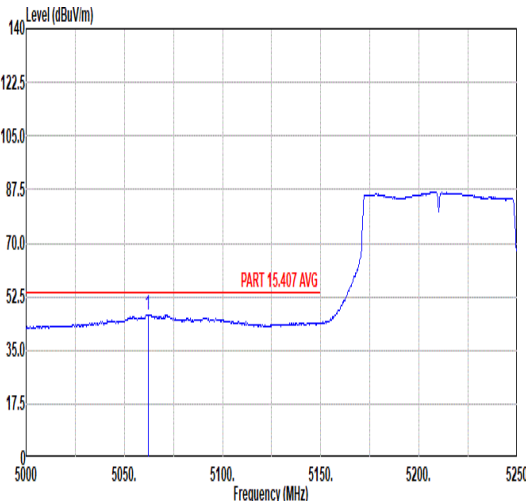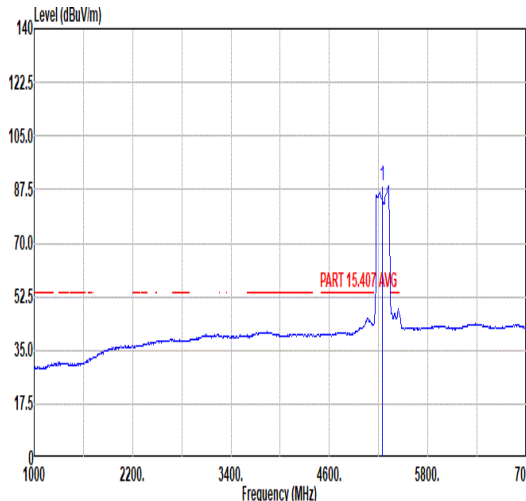

Mode	9																																																																																											
	Band Edge - L																																																																																											
	U-NII-1_5.15-5.25_802.11ac VHT160_CH50_5250MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5077.50</td><td>55.49</td><td>74.00</td><td>-18.51</td><td>42.95</td><td>34.88</td><td>9.91</td><td>32.25</td><td>380</td><td>42</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5077.50	55.49	74.00	-18.51	42.95	34.88	9.91	32.25	380	42	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5250.00</td><td>95.11</td><td>-----</td><td>-----</td><td>81.92</td><td>35.20</td><td>10.17</td><td>32.18</td><td>380</td><td>42</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5250.00	95.11	-----	-----	81.92	35.20	10.17	32.18	380	42
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5077.50	55.49	74.00	-18.51	42.95	34.88	9.91	32.25	380	42	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5250.00	95.11	-----	-----	81.92	35.20	10.17	32.18	380	42	PEAK																																																																																	
Avg																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5062.00</td><td>46.69</td><td>54.00</td><td>-7.31</td><td>34.18</td><td>34.87</td><td>9.90</td><td>32.26</td><td>380</td><td>42</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5062.00	46.69	54.00	-7.31	34.18	34.87	9.90	32.26	380	42	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5250.00</td><td>88.49</td><td>-----</td><td>-----</td><td>75.29</td><td>35.20</td><td>10.18</td><td>32.18</td><td>380</td><td>42</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5250.00	88.49	-----	-----	75.29	35.20	10.18	32.18	380	42
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5062.00	46.69	54.00	-7.31	34.18	34.87	9.90	32.26	380	42	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5250.00	88.49	-----	-----	75.29	35.20	10.18	32.18	380	42	AVERAGE																																																																																	

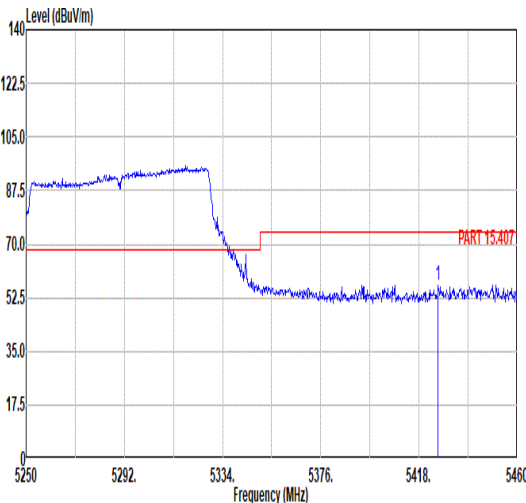
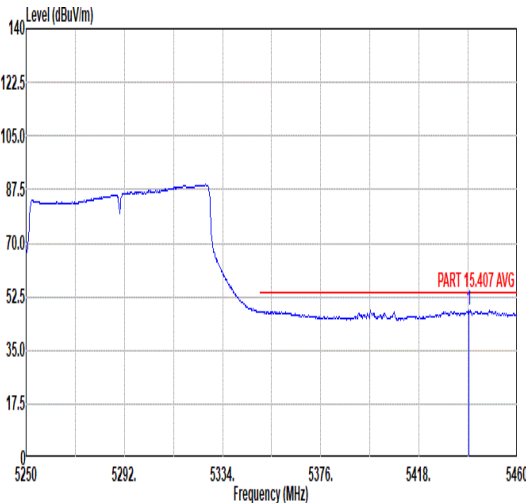


Mode	9																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11ac VHT160_CH50_5250MHz																																									
ANT	1																																									
Pol.	Horizontal	Fundamental																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5426.19</td><td>56.64</td><td>74.00</td><td>-17.36</td><td>43.37</td><td>35.20</td><td>10.29</td><td>32.22</td><td>380</td><td>42</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5426.19	56.64	74.00	-17.36	43.37	35.20	10.29	32.22	380	42	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5426.19	56.64	74.00	-17.36	43.37	35.20	10.29	32.22	380	42	PEAK																															
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5439.42</td><td>47.95</td><td>54.00</td><td>-6.05</td><td>34.70</td><td>35.20</td><td>10.29</td><td>32.24</td><td>380</td><td>42</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5439.42	47.95	54.00	-6.05	34.70	35.20	10.29	32.24	380	42	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5439.42	47.95	54.00	-6.05	34.70	35.20	10.29	32.24	380	42	AVERAGE																															





Mode	9																																																																									
	Band Edge - L																																																																									
	U-NII-1_5.15-5.25_802.11ac VHT160_CH50_5250MHz																																																																									
ANT	1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5043.75</td><td>52.80</td><td>74.00</td><td>-21.20</td><td>40.33</td><td>34.85</td><td>9.88</td><td>32.26</td><td>100</td><td>301 PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5043.75	52.80	74.00	-21.20	40.33	34.85	9.88	32.26	100	301 PEAK	<table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5250.00</td><td>88.17</td><td>-----</td><td>-----</td><td>75.26</td><td>35.07</td><td>10.04</td><td>32.20</td><td>100</td><td>301 PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5250.00	88.17	-----	-----	75.26	35.07	10.04	32.20	100	301 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																	
1 5043.75	52.80	74.00	-21.20	40.33	34.85	9.88	32.26	100	301 PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																	
1 5250.00	88.17	-----	-----	75.26	35.07	10.04	32.20	100	301 PEAK																																																																	
Avg	<table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5053.25</td><td>43.07</td><td>54.00</td><td>-10.93</td><td>30.58</td><td>34.86</td><td>9.89</td><td>32.26</td><td>100</td><td>301 AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5053.25	43.07	54.00	-10.93	30.58	34.86	9.89	32.26	100	301 AVERAGE	<table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5250.00</td><td>79.89</td><td>-----</td><td>-----</td><td>66.70</td><td>35.20</td><td>10.17</td><td>32.18</td><td>100</td><td>301 AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5250.00	79.89	-----	-----	66.70	35.20	10.17	32.18	100	301 AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																	
1 5053.25	43.07	54.00	-10.93	30.58	34.86	9.89	32.26	100	301 AVERAGE																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																	
1 5250.00	79.89	-----	-----	66.70	35.20	10.17	32.18	100	301 AVERAGE																																																																	



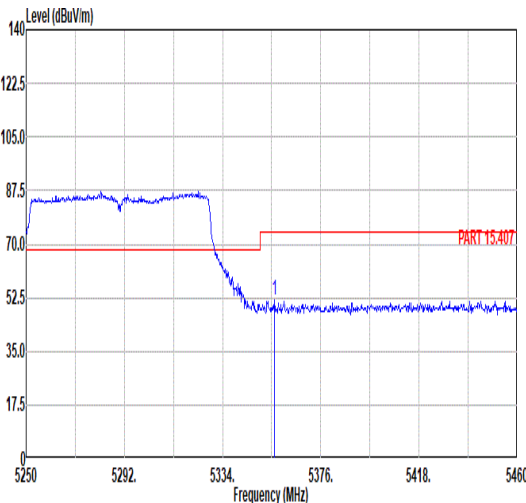
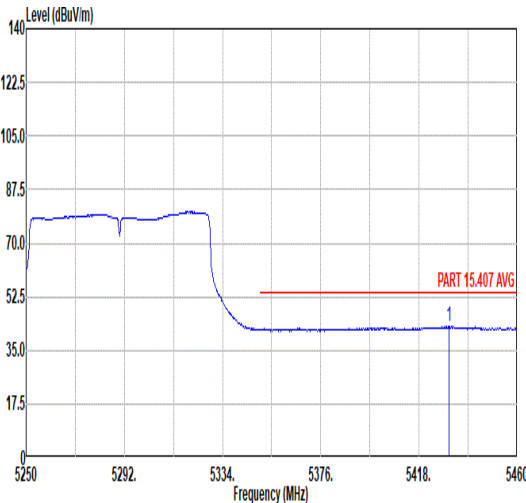


Mode	9																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11ac VHT160_CH50_5250MHz																																																		
ANT	1																																																		
Pol.	Vertical										Fundamental																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5356.26</td><td>51.75</td><td>74.00</td><td>-22.25</td><td>38.50</td><td>35.20</td><td>10.22</td><td>32.17</td><td>100</td><td>301</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5356.26	51.75	74.00	-22.25	38.50	35.20	10.22	32.17	100	301	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5356.26	51.75	74.00	-22.25	38.50	35.20	10.22	32.17	100	301	PEAK																																								
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5430.81</td><td>42.67</td><td>54.00</td><td>-11.33</td><td>29.40</td><td>35.20</td><td>10.29</td><td>32.22</td><td>100</td><td>301</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5430.81	42.67	54.00	-11.33	29.40	35.20	10.29	32.22	100	301	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5430.81	42.67	54.00	-11.33	29.40	35.20	10.29	32.22	100	301	AVERAGE																																								

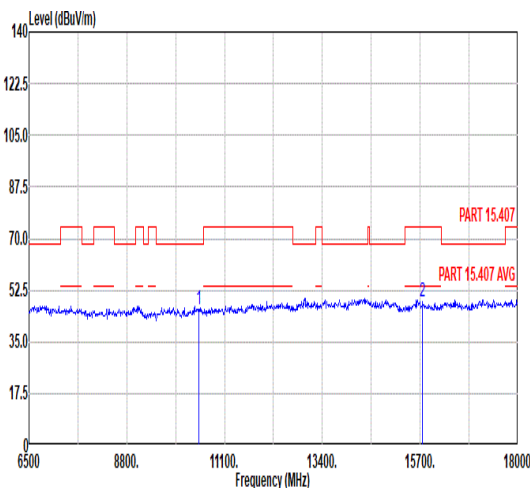
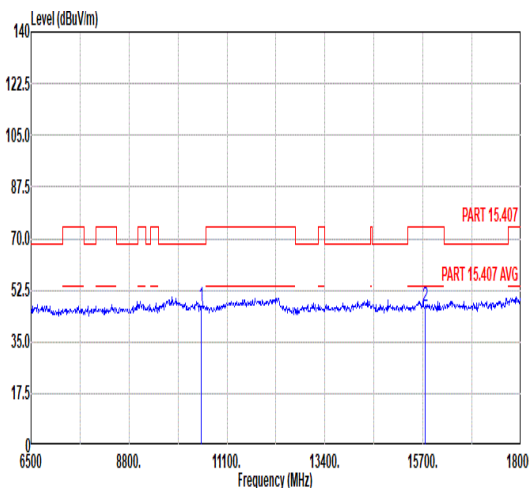


Mode	9																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-1_5.15-5.25_802.11ac VHT160_CH50_5250MHz																																																																																																																									
ANT	1																																																																																																																									
Pol.	Horizontal							Vertical																																																																																																																		
Peak Avg																																																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>10500.00</td><td>45.71</td><td>68.30</td><td>-22.59</td><td>54.72</td><td>37.30</td><td>13.39</td><td>59.70</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>2</td><td>15750.00</td><td>48.77</td><td>74.00</td><td>-25.23</td><td>50.89</td><td>40.35</td><td>15.88</td><td>58.35</td><td>--</td><td>--</td><td>Peak</td><td></td></tr></tbody></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10500.00	45.71	68.30	-22.59	54.72	37.30	13.39	59.70	--	--	Peak		2	15750.00	48.77	74.00	-25.23	50.89	40.35	15.88	58.35	--	--	Peak		<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>10500.00</td><td>47.03</td><td>68.30</td><td>-21.27</td><td>56.04</td><td>37.30</td><td>13.39</td><td>59.70</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>2</td><td>15750.00</td><td>47.28</td><td>74.00</td><td>-26.72</td><td>49.40</td><td>40.35</td><td>15.88</td><td>58.35</td><td>--</td><td>--</td><td>Peak</td><td></td></tr></tbody></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10500.00	47.03	68.30	-21.27	56.04	37.30	13.39	59.70	--	--	Peak		2	15750.00	47.28	74.00	-26.72	49.40	40.35	15.88	58.35	--	--	Peak	
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																		
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1	10500.00	45.71	68.30	-22.59	54.72	37.30	13.39	59.70	--	--	Peak																																																																																																															
2	15750.00	48.77	74.00	-25.23	50.89	40.35	15.88	58.35	--	--	Peak																																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																	
1	10500.00	47.03	68.30	-21.27	56.04	37.30	13.39	59.70	--	--	Peak																																																																																																															
2	15750.00	47.28	74.00	-26.72	49.40	40.35	15.88	58.35	--	--	Peak																																																																																																															

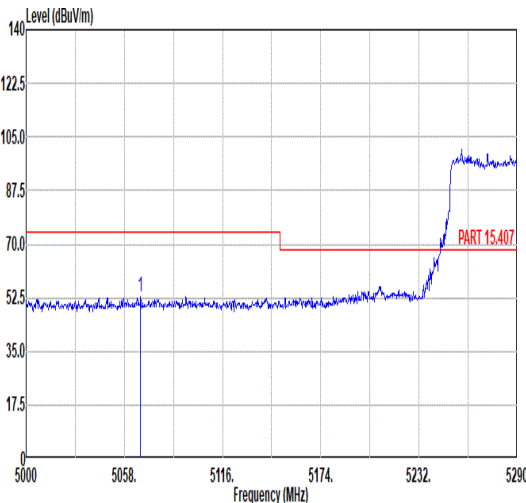
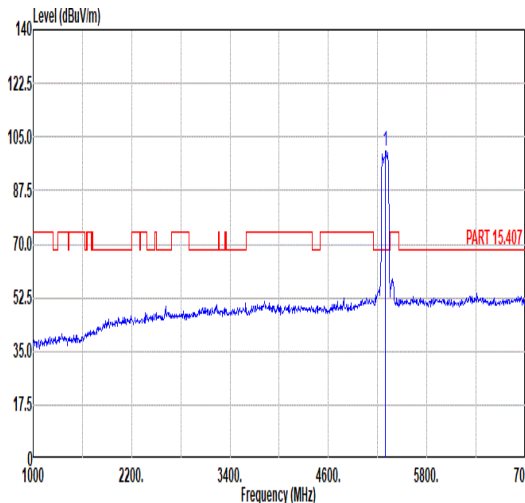
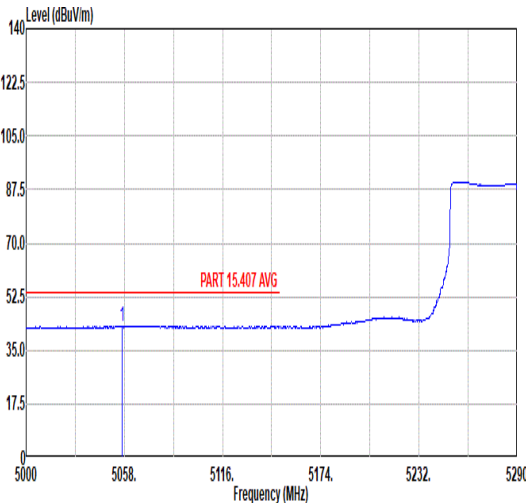
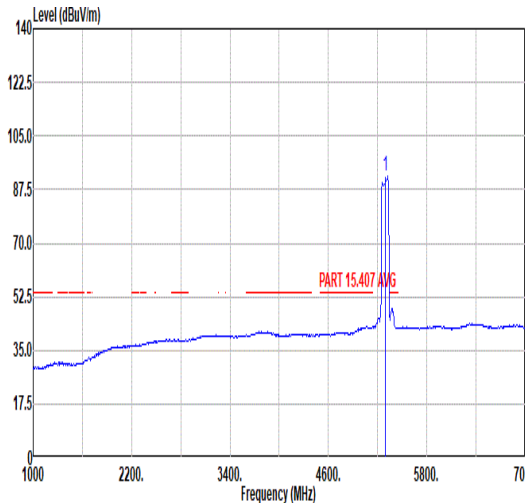


Mode	10																																																		
	Band Edge - L																																																		
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																		
ANT	1																																																		
Pol.	Horizontal																																																		
Peak																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5067.57</td><td>52.72</td><td>74.00</td><td>-21.28</td><td>40.21</td><td>34.87</td><td>9.90</td><td>32.26</td><td>274</td><td>49 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5067.57	52.72	74.00	-21.28	40.21	34.87	9.90	32.26	274	49 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	5067.57	52.72	74.00	-21.28	40.21	34.87	9.90	32.26	274	49 PEAK																																									
Fundamental																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5290.00</td><td>100.16</td><td>-----</td><td>-----</td><td>87.02</td><td>35.19</td><td>10.13</td><td>32.18</td><td>274</td><td>49 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	100.16	-----	-----	87.02	35.19	10.13	32.18	274	49 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	5290.00	100.16	-----	-----	87.02	35.19	10.13	32.18	274	49 PEAK																																									
Avg																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5056.55</td><td>42.99</td><td>54.00</td><td>-11.01</td><td>30.50</td><td>34.86</td><td>9.89</td><td>32.26</td><td>274</td><td>49 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5056.55	42.99	54.00	-11.01	30.50	34.86	9.89	32.26	274	49 AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	5056.55	42.99	54.00	-11.01	30.50	34.86	9.89	32.26	274	49 AVERAGE																																									
AVERAGE																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5290.00</td><td>91.72</td><td>-----</td><td>-----</td><td>78.52</td><td>35.20</td><td>10.18</td><td>32.18</td><td>274</td><td>49 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	91.72	-----	-----	78.52	35.20	10.18	32.18	274	49 AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	5290.00	91.72	-----	-----	78.52	35.20	10.18	32.18	274	49 AVERAGE																																									

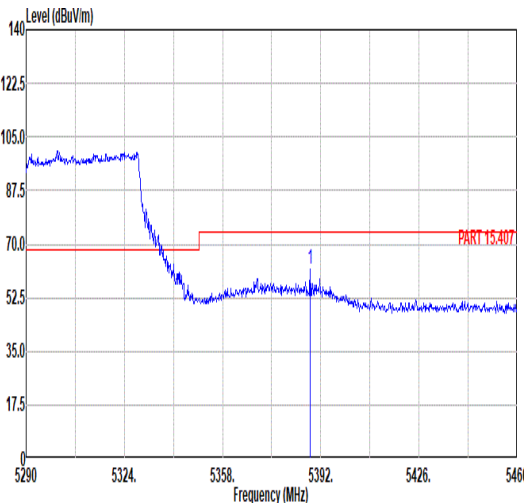
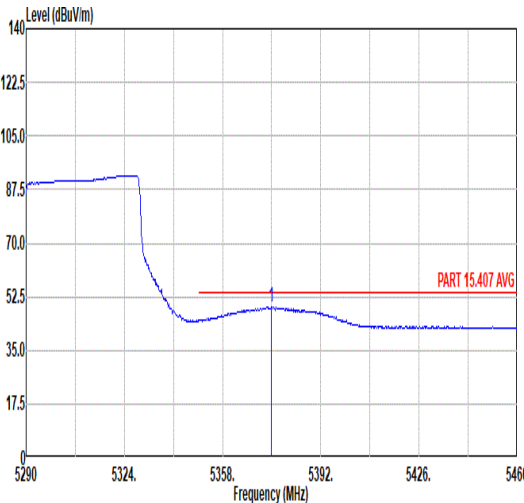


Mode	10																																																	
	Band Edge - R																																																	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																	
ANT	1																																																	
Pol.	Horizontal					Fundamental																																												
Peak	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5388.43</td><td>61.77</td><td>74.00</td><td>-12.23</td><td>48.48</td><td>35.20</td><td>10.27</td><td>32.18</td><td>274</td><td>49</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5388.43	61.77	74.00	-12.23	48.48	35.20	10.27	32.18	274	49	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5388.43	61.77	74.00	-12.23	48.48	35.20	10.27	32.18	274	49	PEAK																																							
Avg	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5374.83</td><td>49.23</td><td>54.00</td><td>-4.77</td><td>35.95</td><td>35.20</td><td>10.25</td><td>32.17</td><td>274</td><td>49</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5374.83	49.23	54.00	-4.77	35.95	35.20	10.25	32.17	274	49	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5374.83	49.23	54.00	-4.77	35.95	35.20	10.25	32.17	274	49	AVERAGE																																							

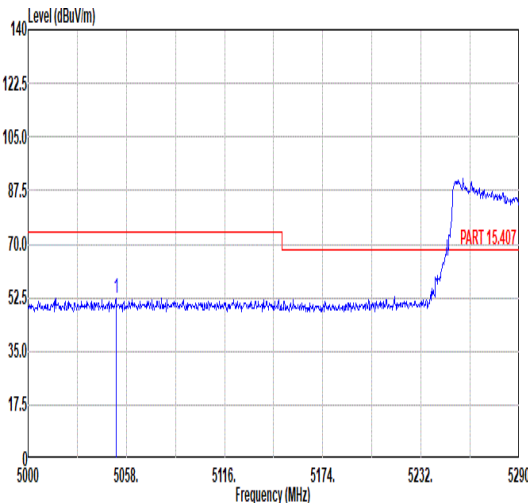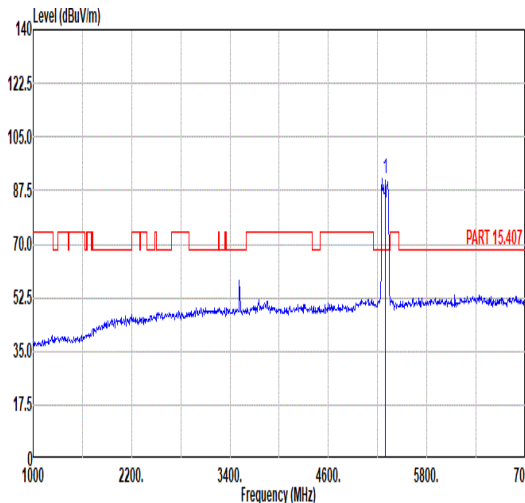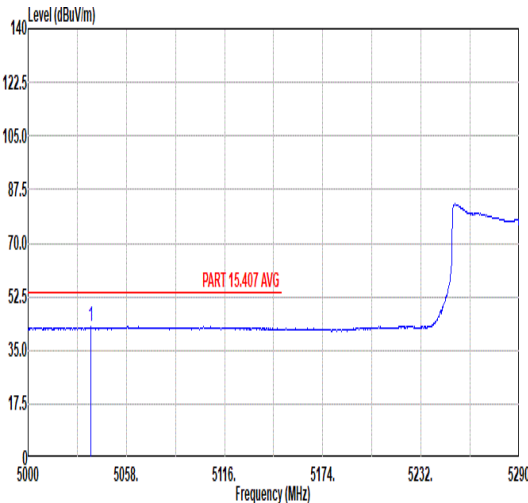
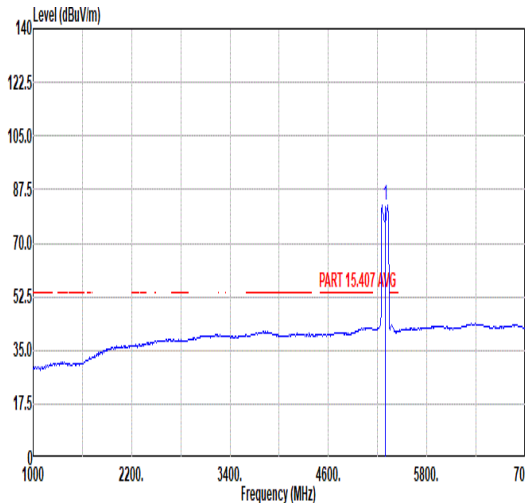


Mode	10																																																																																								
	Band Edge - L																																																																																								
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																																																								
ANT	1																																																																																								
Pol.	Vertical					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5051.91</td><td>52.23</td><td>74.00</td><td>-21.77</td><td>39.74</td><td>34.86</td><td>9.89</td><td>32.26</td><td>390</td><td>310</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5051.91	52.23	74.00	-21.77	39.74	34.86	9.89	32.26	390	310	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5290.00</td><td>91.31</td><td>-----</td><td>-----</td><td>78.33</td><td>35.11</td><td>10.07</td><td>32.20</td><td>390</td><td>310</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	91.31	-----	-----	78.33	35.11	10.07	32.20	390	310
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5051.91	52.23	74.00	-21.77	39.74	34.86	9.89	32.26	390	310	PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5290.00	91.31	-----	-----	78.33	35.11	10.07	32.20	390	310	PEAK																																																																														
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5036.83</td><td>42.68</td><td>54.00</td><td>-11.32</td><td>30.22</td><td>34.84</td><td>9.88</td><td>32.26</td><td>390</td><td>310</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5036.83	42.68	54.00	-11.32	30.22	34.84	9.88	32.26	390	310	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5290.00</td><td>82.62</td><td>-----</td><td>-----</td><td>69.64</td><td>35.11</td><td>10.07</td><td>32.20</td><td>390</td><td>310</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	82.62	-----	-----	69.64	35.11	10.07	32.20	390	310
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5036.83	42.68	54.00	-11.32	30.22	34.84	9.88	32.26	390	310	AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5290.00	82.62	-----	-----	69.64	35.11	10.07	32.20	390	310	AVERAGE																																																																														



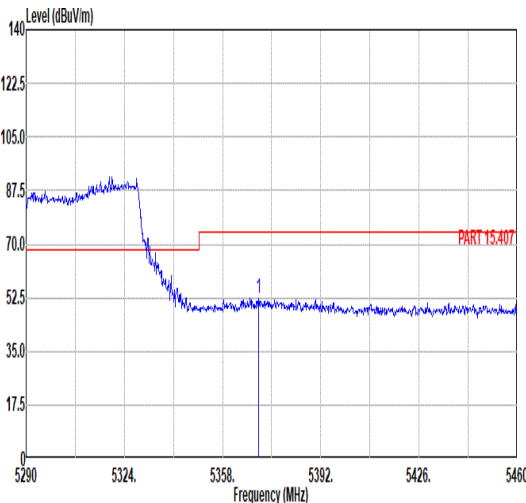
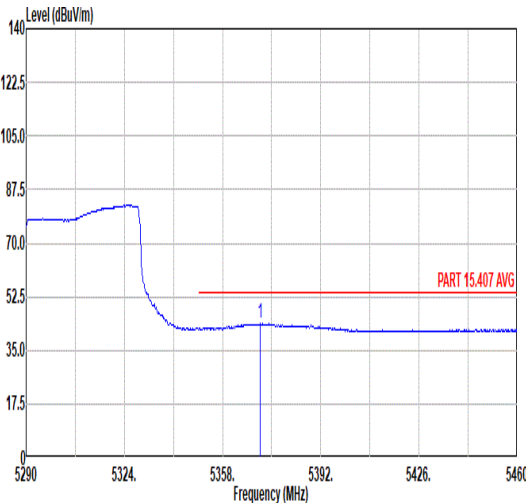


Mode	10																																																	
	Band Edge - R																																																	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																	
ANT	1																																																	
Pol.	Vertical					Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5370.58</td><td>52.41</td><td>74.00</td><td>-21.59</td><td>39.14</td><td>35.20</td><td>10.24</td><td>32.17</td><td>390</td><td>310</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5370.58	52.41	74.00	-21.59	39.14	35.20	10.24	32.17	390	310	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5370.58	52.41	74.00	-21.59	39.14	35.20	10.24	32.17	390	310	PEAK																																							
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5371.09</td><td>43.80</td><td>54.00</td><td>-10.20</td><td>30.53</td><td>35.20</td><td>10.24</td><td>32.17</td><td>390</td><td>310</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5371.09	43.80	54.00	-10.20	30.53	35.20	10.24	32.17	390	310	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	5371.09	43.80	54.00	-10.20	30.53	35.20	10.24	32.17	390	310	AVERAGE																																							

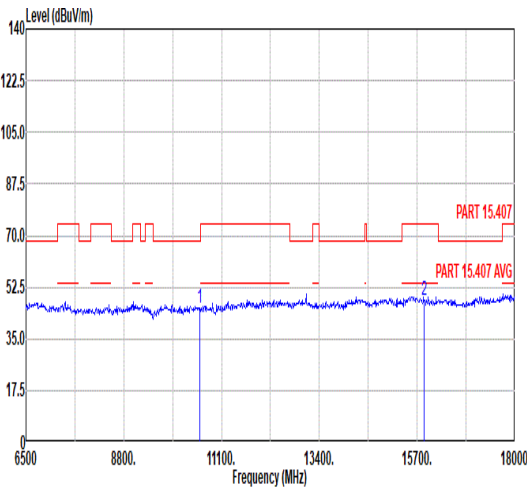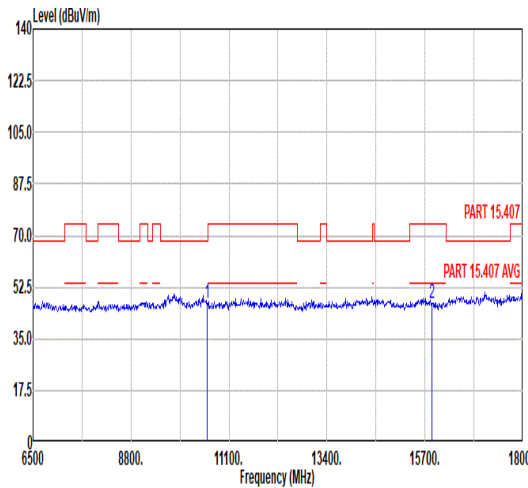


Mode	10																																																																																																																																																																																	
	Harmonic																																																																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full RU_5290MHz																																																																																																																																																																																	
ANT	1																																																																																																																																																																																	
Pol.	Horizontal								Vertical																																																																																																																																																																									
Peak Avg																																																																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable</th><th colspan="2">Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1</td><td>10580.00</td><td>45.29</td><td>68.30</td><td>-23.01</td><td>53.94</td><td>37.39</td><td>13.50</td><td>59.54</td><td>--</td><td>--</td><td>Peak</td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>15870.00</td><td>48.20</td><td>74.00</td><td>-25.80</td><td>50.41</td><td>40.42</td><td>15.98</td><td>58.61</td><td>--</td><td>--</td><td>Peak</td><td></td><td></td><td></td><td></td></tr></table>										Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor									MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg							1	10580.00	45.29	68.30	-23.01	53.94	37.39	13.50	59.54	--	--	Peak					2	15870.00	48.20	74.00	-25.80	50.41	40.42	15.98	58.61	--	--	Peak					<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable</th><th colspan="2">Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1</td><td>10580.00</td><td>46.97</td><td>68.30</td><td>-21.33</td><td>55.62</td><td>37.39</td><td>13.50</td><td>59.54</td><td>--</td><td>--</td><td>Peak</td><td></td><td></td><td></td><td></td></tr><tr><td>2</td><td>15870.00</td><td>46.95</td><td>74.00</td><td>-27.05</td><td>49.16</td><td>40.42</td><td>15.98</td><td>58.61</td><td>--</td><td>--</td><td>Peak</td><td></td><td></td><td></td><td></td></tr></table>										Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor									MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg							1	10580.00	46.97	68.30	-21.33	55.62	37.39	13.50	59.54	--	--	Peak					2	15870.00	46.95	74.00	-27.05	49.16	40.42	15.98	58.61	--	--	Peak				
			Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark																																																																																																																																																																	
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																									
1	10580.00	45.29	68.30	-23.01	53.94	37.39	13.50	59.54	--	--	Peak																																																																																																																																																																							
2	15870.00	48.20	74.00	-25.80	50.41	40.42	15.98	58.61	--	--	Peak																																																																																																																																																																							
		Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark																																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																									
1	10580.00	46.97	68.30	-21.33	55.62	37.39	13.50	59.54	--	--	Peak																																																																																																																																																																							
2	15870.00	46.95	74.00	-27.05	49.16	40.42	15.98	58.61	--	--	Peak																																																																																																																																																																							

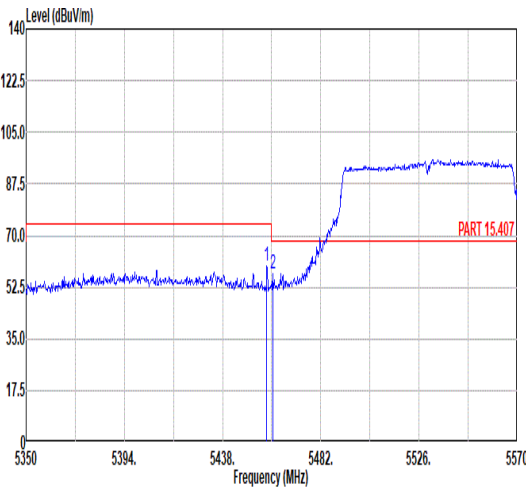
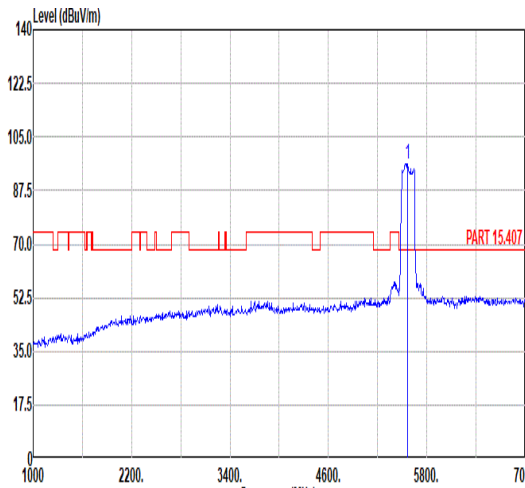
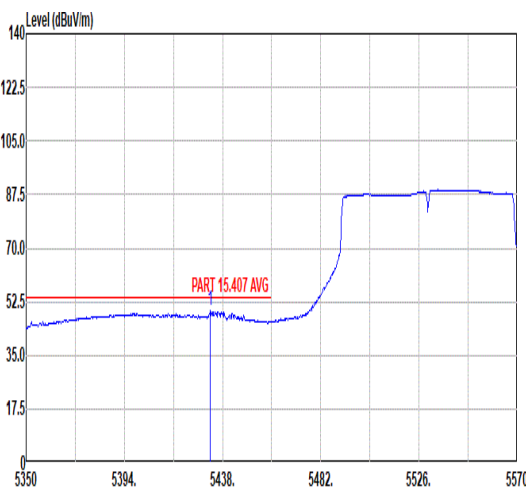
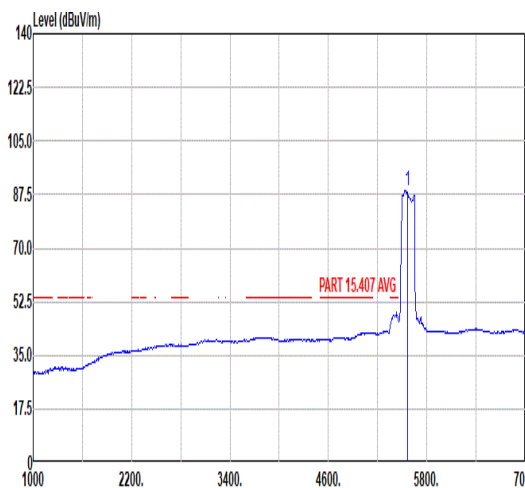


Mode	11																																																																																																			
	Band Edge - L																																																																																																			
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5457.80</td><td>59.64</td><td>74.00</td><td>-14.36</td><td>46.40</td><td>35.20</td><td>10.30</td><td>32.26</td><td>332</td><td>52 PEAK</td></tr><tr><td>2</td><td>5460.44</td><td>56.88</td><td>68.30</td><td>-11.42</td><td>43.64</td><td>35.20</td><td>10.30</td><td>32.26</td><td>332</td><td>52 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5457.80	59.64	74.00	-14.36	46.40	35.20	10.30	32.26	332	52 PEAK	2	5460.44	56.88	68.30	-11.42	43.64	35.20	10.30	32.26	332	52 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5570.00</td><td>96.41</td><td>-----</td><td>-----</td><td>83.15</td><td>35.25</td><td>10.31</td><td>32.30</td><td>332</td><td>52 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5570.00	96.41	-----	-----	83.15	35.25	10.31	32.30	332	52 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	5457.80	59.64	74.00	-14.36	46.40	35.20	10.30	32.26	332	52 PEAK																																																																																										
2	5460.44	56.88	68.30	-11.42	43.64	35.20	10.30	32.26	332	52 PEAK																																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	5570.00	96.41	-----	-----	83.15	35.25	10.31	32.30	332	52 PEAK																																																																																										
Avg																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5432.50</td><td>49.67</td><td>54.00</td><td>-4.33</td><td>36.41</td><td>35.20</td><td>10.29</td><td>32.23</td><td>332</td><td>52 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5432.50	49.67	54.00	-4.33	36.41	35.20	10.29	32.23	332	52 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5570.00</td><td>88.76</td><td>-----</td><td>-----</td><td>75.52</td><td>35.23</td><td>10.30</td><td>32.29</td><td>332</td><td>52 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5570.00	88.76	-----	-----	75.52	35.23	10.30	32.29	332	52 AVERAGE											
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	5432.50	49.67	54.00	-4.33	36.41	35.20	10.29	32.23	332	52 AVERAGE																																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	5570.00	88.76	-----	-----	75.52	35.23	10.30	32.29	332	52 AVERAGE																																																																																										

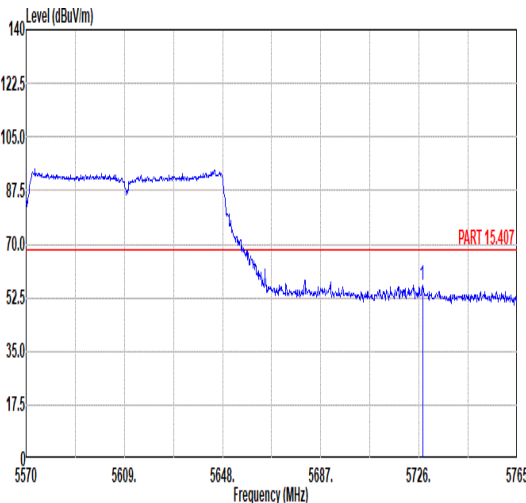


Mode	11																																								
	Band Edge - R																																								
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz																																								
ANT	1																																								
Pol.	Horizontal	Fundamental																																							
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5727.37</td><td>56.34</td><td>68.30</td><td>-11.96</td><td>42.76</td><td>35.57</td><td>10.37</td><td>32.36</td><td>332</td><td>52 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5727.37	56.34	68.30	-11.96	42.76	35.57	10.37	32.36	332	52 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																															
1	5727.37	56.34	68.30	-11.96	42.76	35.57	10.37	32.36	332	52 PEAK																															

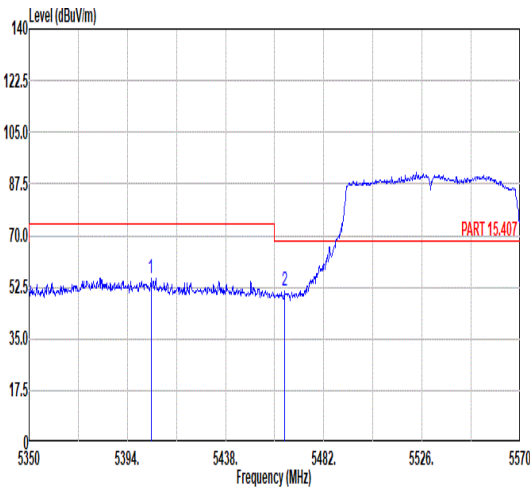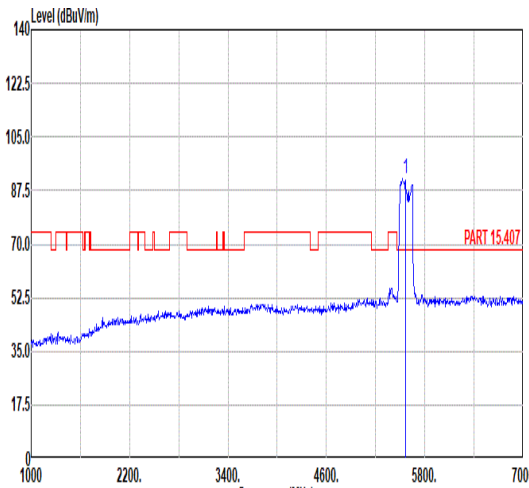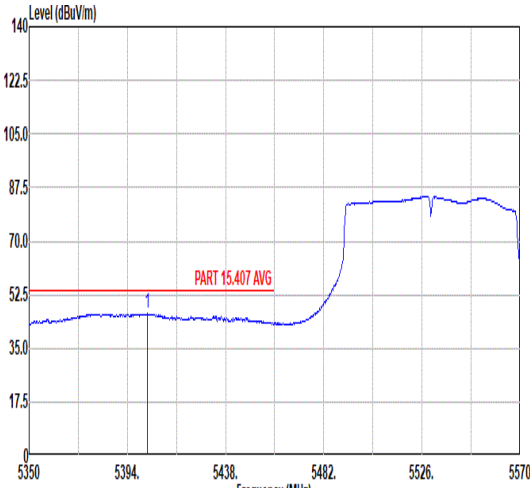
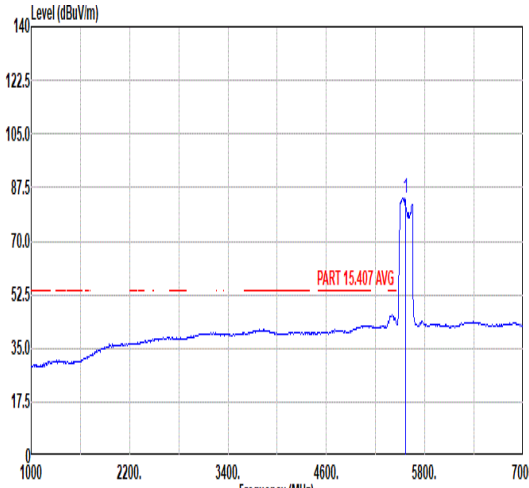


Mode	11																																																																																																					
	Band Edge - L																																																																																																					
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Vertical						Fundamental																																																																																															
Peak																																																																																																						
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5404.56</td><td>55.71</td><td>74.00</td><td>-18.29</td><td>42.40</td><td>35.20</td><td>10.29</td><td>32.18</td><td>391</td><td>356</td><td>PEAK</td></tr><tr><td>2</td><td>5464.40</td><td>51.24</td><td>68.30</td><td>-17.06</td><td>38.00</td><td>35.20</td><td>10.30</td><td>32.26</td><td>391</td><td>356</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5404.56	55.71	74.00	-18.29	42.40	35.20	10.29	32.18	391	356	PEAK	2	5464.40	51.24	68.30	-17.06	38.00	35.20	10.30	32.26	391	356	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5570.00</td><td>91.36</td><td>-----</td><td>-----</td><td>78.12</td><td>35.22</td><td>10.30</td><td>32.28</td><td>391</td><td>356</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5570.00	91.36	-----	-----	78.12	35.22	10.30	32.28	391	356
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																													
1	5404.56	55.71	74.00	-18.29	42.40	35.20	10.29	32.18	391	356	PEAK																																																																																											
2	5464.40	51.24	68.30	-17.06	38.00	35.20	10.30	32.26	391	356	PEAK																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																													
1	5570.00	91.36	-----	-----	78.12	35.22	10.30	32.28	391	356	PEAK																																																																																											
Avg																																																																																																						
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5402.80</td><td>46.26</td><td>54.00</td><td>-7.74</td><td>32.95</td><td>35.20</td><td>10.29</td><td>32.18</td><td>391</td><td>356</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5402.80	46.26	54.00	-7.74	32.95	35.20	10.29	32.18	391	356	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5570.00</td><td>84.13</td><td>-----</td><td>-----</td><td>70.89</td><td>35.22</td><td>10.30</td><td>32.28</td><td>391</td><td>356</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5570.00	84.13	-----	-----	70.89	35.22	10.30	32.28	391	356	AVERAGE											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																													
1	5402.80	46.26	54.00	-7.74	32.95	35.20	10.29	32.18	391	356	AVERAGE																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																													
1	5570.00	84.13	-----	-----	70.89	35.22	10.30	32.28	391	356	AVERAGE																																																																																											



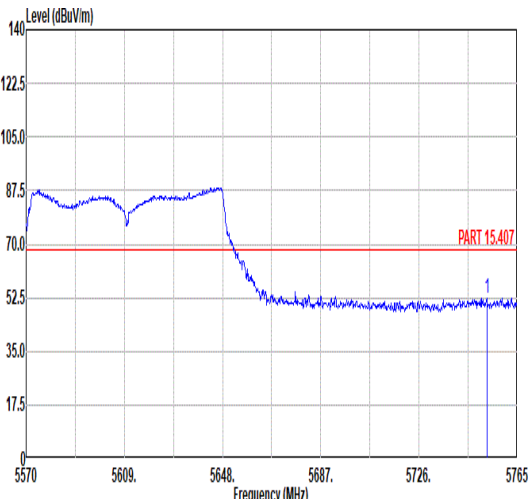


Mode	11																																																	
	Band Edge - R																																																	
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz																																																	
ANT	1																																																	
Pol.	Vertical						Fundamental																																											
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5752.91</td><td>52.23</td><td>68.30</td><td>-16.07</td><td>38.57</td><td>35.62</td><td>10.39</td><td>32.35</td><td>391</td><td>356</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5752.91	52.23	68.30	-16.07	38.57	35.62	10.39	32.35	391	356	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	5752.91	52.23	68.30	-16.07	38.57	35.62	10.39	32.35	391	356	PEAK																																							

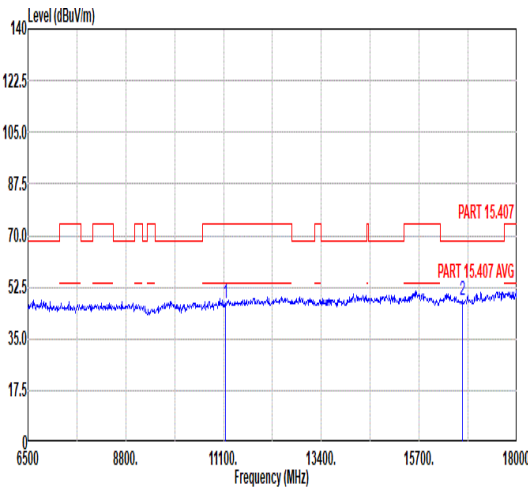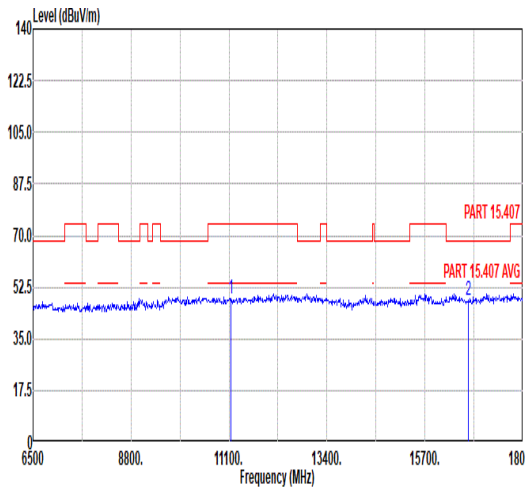


Mode	11																																																																																																				
	Harmonic																																																																																																				
	U-NII-2C_5.47-5.725_802.11ac VHT160_CH114_5570MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Horizontal						Vertical																																																																																														
Peak Avg																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr><tr><td>1 11140.00</td><td>47.06</td><td>74.00</td><td>-26.94</td><td>53.75</td><td>38.04</td><td>13.72</td><td>58.45</td><td>-- -- Peak</td></tr><tr><td>2 16710.00</td><td>47.88</td><td>68.30</td><td>-20.42</td><td>47.51</td><td>41.84</td><td>16.56</td><td>58.03</td><td>-- -- Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 11140.00	47.06	74.00	-26.94	53.75	38.04	13.72	58.45	-- -- Peak	2 16710.00	47.88	68.30	-20.42	47.51	41.84	16.56	58.03	-- -- Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm deg</td></tr><tr><td>1 11140.00</td><td>48.72</td><td>74.00</td><td>-25.28</td><td>55.41</td><td>38.04</td><td>13.72</td><td>58.45</td><td>-- -- Peak</td></tr><tr><td>2 16710.00</td><td>47.87</td><td>68.30</td><td>-20.43</td><td>47.50</td><td>41.84</td><td>16.56</td><td>58.03</td><td>-- -- Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg	1 11140.00	48.72	74.00	-25.28	55.41	38.04	13.72	58.45	-- -- Peak	2 16710.00	47.87	68.30	-20.43	47.50	41.84	16.56	58.03	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																													
1 11140.00	47.06	74.00	-26.94	53.75	38.04	13.72	58.45	-- -- Peak																																																																																													
2 16710.00	47.88	68.30	-20.42	47.51	41.84	16.56	58.03	-- -- Peak																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm deg																																																																																													
1 11140.00	48.72	74.00	-25.28	55.41	38.04	13.72	58.45	-- -- Peak																																																																																													
2 16710.00	47.87	68.30	-20.43	47.50	41.84	16.56	58.03	-- -- Peak																																																																																													

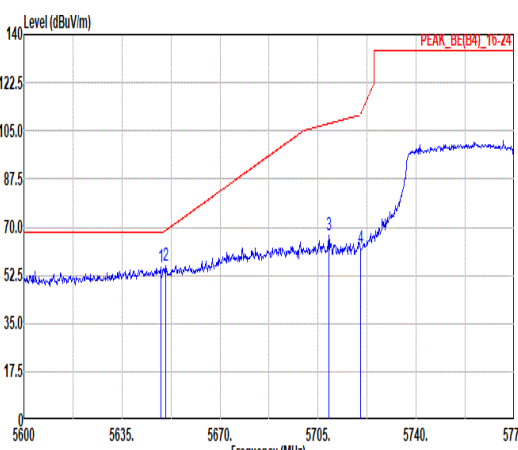
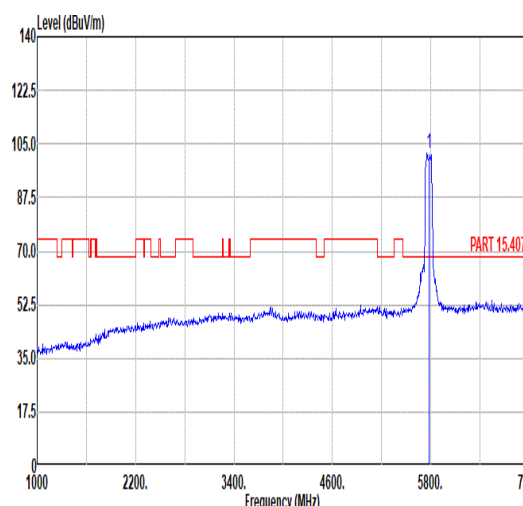
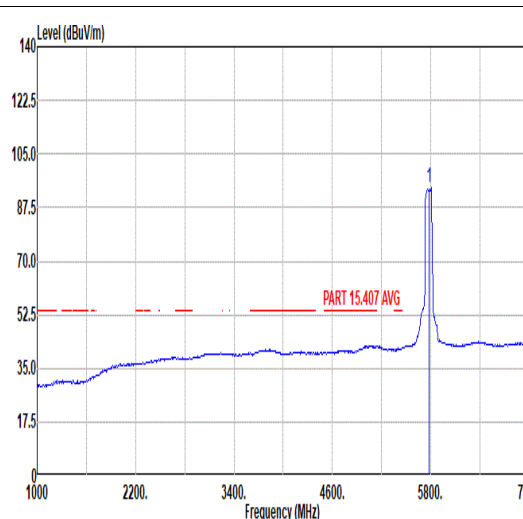


Mode	12																																																																																																																														
	Band Edge - L																																																																																																																														
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																														
ANT	1																																																																																																																														
Pol.	Horizontal										Fundamental																																																																																																																				
Peak																																																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5648.83</td><td>55.52</td><td>68.30</td><td>-12.78</td><td>42.10</td><td>35.40</td><td>10.33</td><td>32.31</td><td>306</td><td>58</td><td>PEAK</td></tr><tr><td>2</td><td>5650.58</td><td>56.04</td><td>68.73</td><td>-12.69</td><td>42.62</td><td>35.40</td><td>10.33</td><td>32.31</td><td>306</td><td>58</td><td>PEAK</td></tr><tr><td>3</td><td>5708.85</td><td>66.88</td><td>107.68</td><td>-40.80</td><td>53.34</td><td>35.53</td><td>10.36</td><td>32.35</td><td>306</td><td>58</td><td>PEAK</td></tr><tr><td>4</td><td>5720.23</td><td>62.14</td><td>111.31</td><td>-49.17</td><td>48.57</td><td>35.56</td><td>10.37</td><td>32.36</td><td>306</td><td>58</td><td>PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5648.83	55.52	68.30	-12.78	42.10	35.40	10.33	32.31	306	58	PEAK	2	5650.58	56.04	68.73	-12.69	42.62	35.40	10.33	32.31	306	58	PEAK	3	5708.85	66.88	107.68	-40.80	53.34	35.53	10.36	32.35	306	58	PEAK	4	5720.23	62.14	111.31	-49.17	48.57	35.56	10.37	32.36	306	58	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>101.75</td><td>-----</td><td>-----</td><td>88.09</td><td>35.62</td><td>10.39</td><td>32.35</td><td>306</td><td>58</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	101.75	-----	-----	88.09	35.62	10.39	32.35	306	58	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	5648.83	55.52	68.30	-12.78	42.10	35.40	10.33	32.31	306	58	PEAK																																																																																																																				
2	5650.58	56.04	68.73	-12.69	42.62	35.40	10.33	32.31	306	58	PEAK																																																																																																																				
3	5708.85	66.88	107.68	-40.80	53.34	35.53	10.36	32.35	306	58	PEAK																																																																																																																				
4	5720.23	62.14	111.31	-49.17	48.57	35.56	10.37	32.36	306	58	PEAK																																																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	5775.00	101.75	-----	-----	88.09	35.62	10.39	32.35	306	58	PEAK																																																																																																																				
Avg	Blank																																																																																																																														
											<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>93.80</td><td>-----</td><td>-----</td><td>79.97</td><td>35.75</td><td>10.43</td><td>32.35</td><td>306</td><td>58</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	93.80	-----	-----	79.97	35.75	10.43	32.35	306	58	AVERAGE																																																																												
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	5775.00	93.80	-----	-----	79.97	35.75	10.43	32.35	306	58	AVERAGE																																																																																																																				

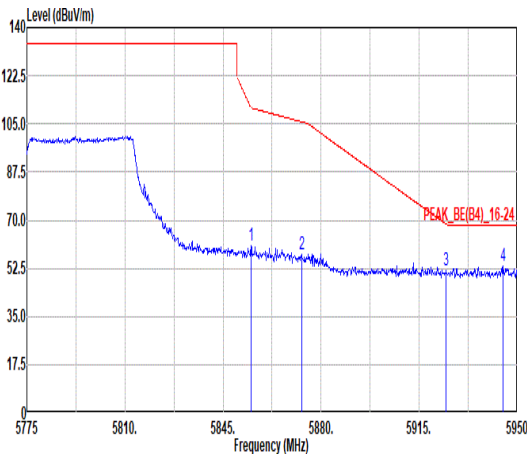


Mode	12																																																									
	Band Edge - R																																																									
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																									
ANT	1																																																									
Pol.	Horizontal	Fundamental																																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5854.98</td><td>60.54</td><td>110.86</td><td>-50.32</td><td>46.60</td><td>35.88</td><td>10.46</td></tr><tr><td>2</td><td>5873.00</td><td>57.38</td><td>105.76</td><td>-48.38</td><td>43.38</td><td>35.93</td><td>10.48</td></tr><tr><td>3</td><td>5924.63</td><td>51.54</td><td>68.48</td><td>-16.94</td><td>37.44</td><td>36.03</td><td>10.53</td></tr><tr><td>4</td><td>5944.93</td><td>53.57</td><td>68.30</td><td>-14.73</td><td>39.47</td><td>36.05</td><td>10.54</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5854.98	60.54	110.86	-50.32	46.60	35.88	10.46	2	5873.00	57.38	105.76	-48.38	43.38	35.93	10.48	3	5924.63	51.54	68.48	-16.94	37.44	36.03	10.53	4	5944.93	53.57	68.30	-14.73	39.47	36.05	10.54	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																			
1	5854.98	60.54	110.86	-50.32	46.60	35.88	10.46																																																			
2	5873.00	57.38	105.76	-48.38	43.38	35.93	10.48																																																			
3	5924.63	51.54	68.48	-16.94	37.44	36.03	10.53																																																			
4	5944.93	53.57	68.30	-14.73	39.47	36.05	10.54																																																			

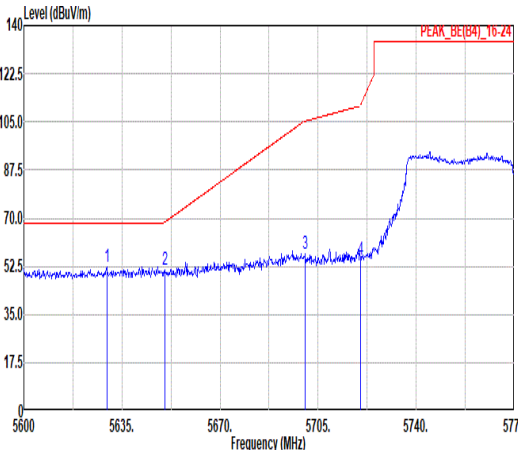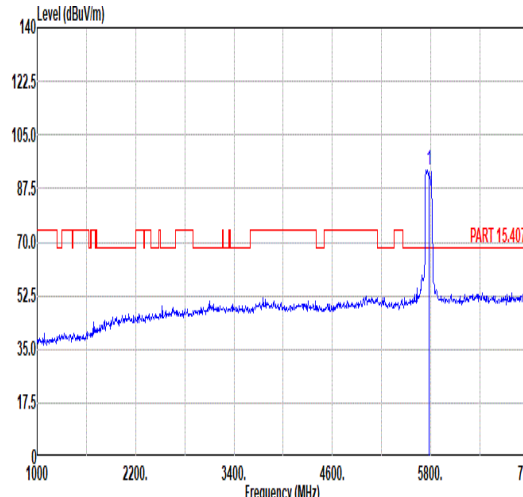
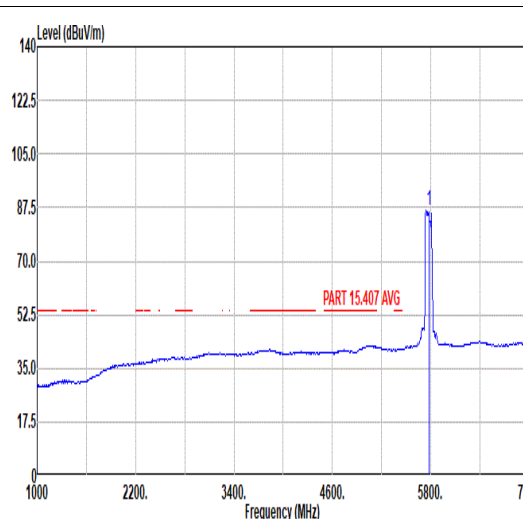


Mode	12																																																																																																																												
	Band Edge - L																																																																																																																												
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																																																												
ANT	1																																																																																																																												
Pol.	Vertical					Fundamental																																																																																																																							
Peak																																																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5629.58</td><td>52.39</td><td>68.30</td><td>-15.91</td><td>39.01</td><td>35.35</td><td>10.32</td><td>32.29</td><td>397</td><td>155</td><td>PEAK</td></tr><tr><td>2</td><td>5650.23</td><td>51.03</td><td>68.47</td><td>-17.44</td><td>37.61</td><td>35.40</td><td>10.33</td><td>32.31</td><td>397</td><td>155</td><td>PEAK</td></tr><tr><td>3</td><td>5700.45</td><td>56.87</td><td>105.33</td><td>-48.46</td><td>43.34</td><td>35.52</td><td>10.36</td><td>32.35</td><td>397</td><td>155</td><td>PEAK</td></tr><tr><td>4</td><td>5720.05</td><td>54.81</td><td>110.91</td><td>-56.10</td><td>41.24</td><td>35.56</td><td>10.37</td><td>32.36</td><td>397</td><td>155</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5629.58	52.39	68.30	-15.91	39.01	35.35	10.32	32.29	397	155	PEAK	2	5650.23	51.03	68.47	-17.44	37.61	35.40	10.33	32.31	397	155	PEAK	3	5700.45	56.87	105.33	-48.46	43.34	35.52	10.36	32.35	397	155	PEAK	4	5720.05	54.81	110.91	-56.10	41.24	35.56	10.37	32.36	397	155	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>93.63</td><td>-----</td><td>-----</td><td>80.02</td><td>35.59</td><td>10.38</td><td>32.36</td><td>397</td><td>155</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	93.63	-----	-----	80.02	35.59	10.38	32.36	397	155
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	5629.58	52.39	68.30	-15.91	39.01	35.35	10.32	32.29	397	155	PEAK																																																																																																																		
2	5650.23	51.03	68.47	-17.44	37.61	35.40	10.33	32.31	397	155	PEAK																																																																																																																		
3	5700.45	56.87	105.33	-48.46	43.34	35.52	10.36	32.35	397	155	PEAK																																																																																																																		
4	5720.05	54.81	110.91	-56.10	41.24	35.56	10.37	32.36	397	155	PEAK																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	5775.00	93.63	-----	-----	80.02	35.59	10.38	32.36	397	155	PEAK																																																																																																																		
Avg	Blank																																																																																																																												
						<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5775.00</td><td>86.54</td><td>-----</td><td>-----</td><td>72.93</td><td>35.59</td><td>10.38</td><td>32.36</td><td>397</td><td>155</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5775.00	86.54	-----	-----	72.93	35.59	10.38	32.36	397	155	AVERAGE																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	5775.00	86.54	-----	-----	72.93	35.59	10.38	32.36	397	155	AVERAGE																																																																																																																		


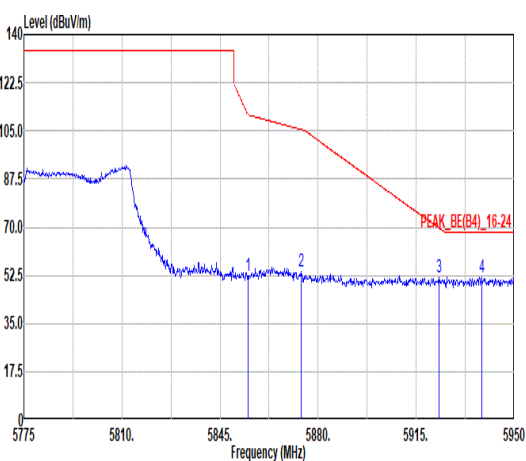


Mode	12																																																									
	Band Edge - R																																																									
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																									
ANT	1																																																									
Pol.	Vertical	Fundamental																																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>5854.98</td><td>52.28</td><td>110.86</td><td>-58.58</td><td>38.34</td><td>35.88</td><td>10.46</td></tr><tr><td>2</td><td>5874.05</td><td>53.68</td><td>105.47</td><td>-51.79</td><td>39.67</td><td>35.94</td><td>10.48</td></tr><tr><td>3</td><td>5923.05</td><td>51.99</td><td>69.64</td><td>-17.65</td><td>37.90</td><td>36.03</td><td>10.52</td></tr><tr><td>4</td><td>5938.45</td><td>51.99</td><td>68.30</td><td>-16.31</td><td>37.89</td><td>36.04</td><td>10.54</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5854.98	52.28	110.86	-58.58	38.34	35.88	10.46	2	5874.05	53.68	105.47	-51.79	39.67	35.94	10.48	3	5923.05	51.99	69.64	-17.65	37.90	36.03	10.52	4	5938.45	51.99	68.30	-16.31	37.89	36.04	10.54	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																			
1	5854.98	52.28	110.86	-58.58	38.34	35.88	10.46																																																			
2	5874.05	53.68	105.47	-51.79	39.67	35.94	10.48																																																			
3	5923.05	51.99	69.64	-17.65	37.90	36.03	10.52																																																			
4	5938.45	51.99	68.30	-16.31	37.89	36.04	10.54																																																			

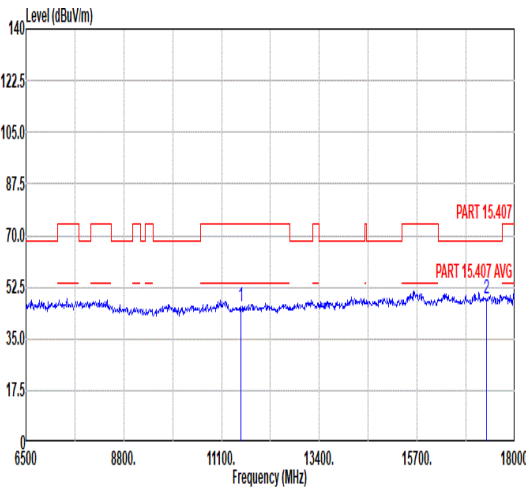
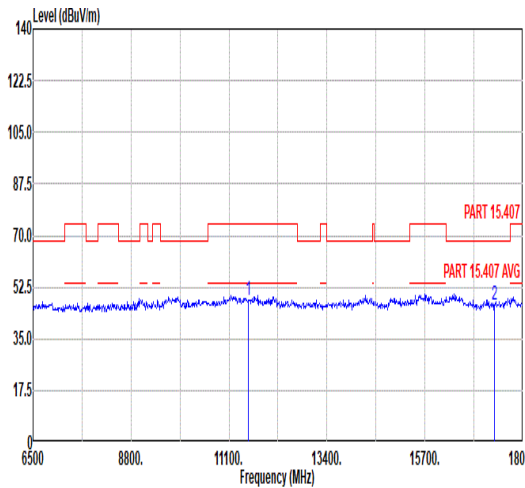


Mode	12																																																																																															
	Harmonic																																																																																															
	U-NII-3_5.725-5.85_802.11ac VHT80_CH155_5775MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11550.00</td><td>46.15</td><td>74.00</td><td>-27.85</td><td>51.60</td><td>38.44</td><td>13.95</td></tr><tr><td>2</td><td>17325.00</td><td>48.47</td><td>68.30</td><td>-19.83</td><td>47.19</td><td>42.41</td><td>16.86</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11550.00	46.15	74.00	-27.85	51.60	38.44	13.95	2	17325.00	48.47	68.30	-19.83	47.19	42.41	16.86	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>11550.00</td><td>48.13</td><td>74.00</td><td>-25.87</td><td>53.58</td><td>38.44</td><td>13.95</td></tr><tr><td>2</td><td>17325.00</td><td>46.73</td><td>68.30</td><td>-21.57</td><td>45.45</td><td>42.41</td><td>16.86</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11550.00	48.13	74.00	-25.87	53.58	38.44	13.95	2	17325.00	46.73	68.30	-21.57	45.45	42.41	16.86
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	11550.00	46.15	74.00	-27.85	51.60	38.44	13.95																																																																																									
2	17325.00	48.47	68.30	-19.83	47.19	42.41	16.86																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	11550.00	48.13	74.00	-25.87	53.58	38.44	13.95																																																																																									
2	17325.00	46.73	68.30	-21.57	45.45	42.41	16.86																																																																																									

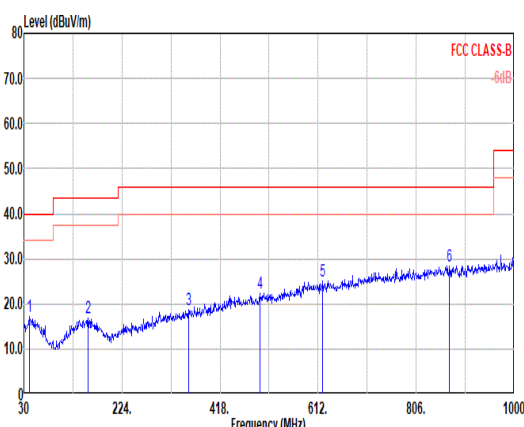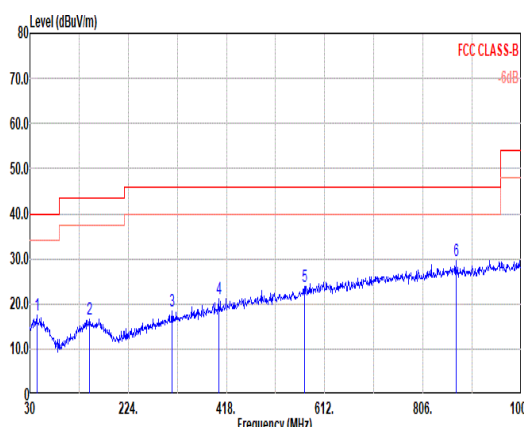

Mode	13																																																																																																																																																																																																																																																																																							
	LF																																																																																																																																																																																																																																																																																							
	U-NII-2A_5.25-5.35_802.11ax HE80_LF_CH58_Full RU_5290MHz																																																																																																																																																																																																																																																																																							
ANT	1																																																																																																																																																																																																																																																																																							
Pol.	Horizontal							Vertical																																																																																																																																																																																																																																																																																
QP/ Peak																																																																																																																																																																																																																																																																																								
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>cm</th><th>deg</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>40.67</td><td>17.34</td><td>40.00</td><td>-22.66</td><td>32.05</td><td>19.35</td><td>0.64</td><td>34.70</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>157.07</td><td>16.82</td><td>43.50</td><td>-26.68</td><td>31.84</td><td>18.57</td><td>1.31</td><td>34.90</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>355.92</td><td>18.59</td><td>46.00</td><td>-27.41</td><td>30.97</td><td>20.36</td><td>1.96</td><td>34.70</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>496.57</td><td>22.39</td><td>46.00</td><td>-23.61</td><td>31.24</td><td>23.31</td><td>2.35</td><td>34.51</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>620.73</td><td>25.07</td><td>46.00</td><td>-20.93</td><td>30.66</td><td>26.16</td><td>2.65</td><td>34.40</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>871.96</td><td>28.39</td><td>46.00</td><td>-17.61</td><td>30.58</td><td>28.72</td><td>3.12</td><td>34.03</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>									Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Level	Factor	Level	Factor	Level	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	cm	deg	cm	deg	1	40.67	17.34	40.00	-22.66	32.05	19.35	0.64	34.70	--	--	--	--	--	Peak	2	157.07	16.82	43.50	-26.68	31.84	18.57	1.31	34.90	--	--	--	--	--	Peak	3	355.92	18.59	46.00	-27.41	30.97	20.36	1.96	34.70	--	--	--	--	--	Peak	4	496.57	22.39	46.00	-23.61	31.24	23.31	2.35	34.51	--	--	--	--	--	Peak	5	620.73	25.07	46.00	-20.93	30.66	26.16	2.65	34.40	--	--	--	--	--	Peak	6	871.96	28.39	46.00	-17.61	30.58	28.72	3.12	34.03	--	--	--	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>cm</th><th>deg</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>43.58</td><td>17.45</td><td>40.00</td><td>-22.55</td><td>32.04</td><td>19.54</td><td>0.66</td><td>34.79</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>147.37</td><td>16.52</td><td>43.50</td><td>-26.98</td><td>31.41</td><td>18.74</td><td>1.27</td><td>34.90</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>310.33</td><td>18.51</td><td>46.00</td><td>-27.49</td><td>32.03</td><td>19.35</td><td>1.83</td><td>34.70</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>402.48</td><td>21.04</td><td>46.00</td><td>-24.96</td><td>32.13</td><td>21.49</td><td>2.12</td><td>34.70</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>572.23</td><td>23.98</td><td>46.00</td><td>-22.02</td><td>30.87</td><td>25.03</td><td>2.54</td><td>34.46</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>870.99</td><td>29.51</td><td>46.00</td><td>-16.49</td><td>31.69</td><td>28.73</td><td>3.12</td><td>34.03</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>									Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Level	Factor	Level	Factor	Level	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	cm	deg	cm	deg	1	43.58	17.45	40.00	-22.55	32.04	19.54	0.66	34.79	--	--	--	--	--	Peak	2	147.37	16.52	43.50	-26.98	31.41	18.74	1.27	34.90	--	--	--	--	--	Peak	3	310.33	18.51	46.00	-27.49	32.03	19.35	1.83	34.70	--	--	--	--	--	Peak	4	402.48	21.04	46.00	-24.96	32.13	21.49	2.12	34.70	--	--	--	--	--	Peak	5	572.23	23.98	46.00	-22.02	30.87	25.03	2.54	34.46	--	--	--	--	--	Peak	6	870.99	29.51	46.00	-16.49	31.69	28.73	3.12	34.03	--	--	--	--	--	Peak
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																																																																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Level	Factor	Level	Factor	Level	Factor																																																																																																																																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	cm	deg	cm	deg																																																																																																																																																																																																																																																																											
1	40.67	17.34	40.00	-22.66	32.05	19.35	0.64	34.70	--	--	--	--	--	Peak																																																																																																																																																																																																																																																																										
2	157.07	16.82	43.50	-26.68	31.84	18.57	1.31	34.90	--	--	--	--	--	Peak																																																																																																																																																																																																																																																																										
3	355.92	18.59	46.00	-27.41	30.97	20.36	1.96	34.70	--	--	--	--	--	Peak																																																																																																																																																																																																																																																																										
4	496.57	22.39	46.00	-23.61	31.24	23.31	2.35	34.51	--	--	--	--	--	Peak																																																																																																																																																																																																																																																																										
5	620.73	25.07	46.00	-20.93	30.66	26.16	2.65	34.40	--	--	--	--	--	Peak																																																																																																																																																																																																																																																																										
6	871.96	28.39	46.00	-17.61	30.58	28.72	3.12	34.03	--	--	--	--	--	Peak																																																																																																																																																																																																																																																																										
		Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																																																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Level	Factor	Level	Factor	Level	Factor																																																																																																																																																																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	cm	deg	cm	deg																																																																																																																																																																																																																																																																											
1	43.58	17.45	40.00	-22.55	32.04	19.54	0.66	34.79	--	--	--	--	--	Peak																																																																																																																																																																																																																																																																										
2	147.37	16.52	43.50	-26.98	31.41	18.74	1.27	34.90	--	--	--	--	--	Peak																																																																																																																																																																																																																																																																										
3	310.33	18.51	46.00	-27.49	32.03	19.35	1.83	34.70	--	--	--	--	--	Peak																																																																																																																																																																																																																																																																										
4	402.48	21.04	46.00	-24.96	32.13	21.49	2.12	34.70	--	--	--	--	--	Peak																																																																																																																																																																																																																																																																										
5	572.23	23.98	46.00	-22.02	30.87	25.03	2.54	34.46	--	--	--	--	--	Peak																																																																																																																																																																																																																																																																										
6	870.99	29.51	46.00	-16.49	31.69	28.73	3.12	34.03	--	--	--	--	--	Peak																																																																																																																																																																																																																																																																										

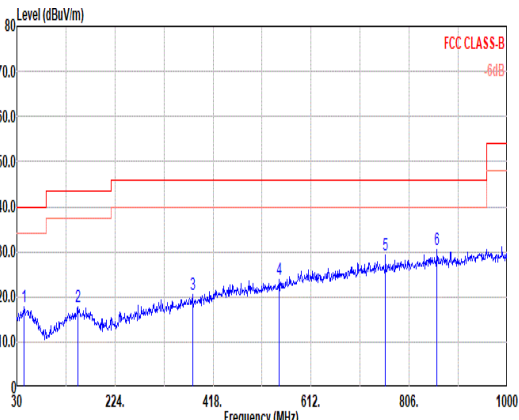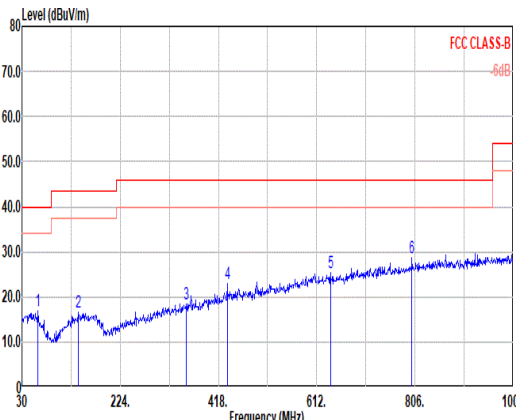


Mode	14																																																																																																												
	LF																																																																																																												
	U-NII-3_5.725-5.85_802.11ac VHT80_LF_CH155_5775MHz																																																																																																												
ANT	1																																																																																																												
Pol.	Horizontal																																																																																																												
QP/ Peak																																																																																																													
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>43.58</td><td>17.77</td><td>40.00</td><td>-22.23</td><td>32.36</td><td>19.54</td><td>0.66</td><td>34.79</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>150.28</td><td>17.71</td><td>43.50</td><td>-25.79</td><td>32.35</td><td>18.98</td><td>1.28</td><td>34.90</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>377.26</td><td>20.56</td><td>46.00</td><td>-25.44</td><td>32.36</td><td>20.87</td><td>2.03</td><td>34.70</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>548.95</td><td>23.82</td><td>46.00</td><td>-22.18</td><td>31.66</td><td>24.17</td><td>2.49</td><td>34.50</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>759.44</td><td>29.29</td><td>46.00</td><td>-16.71</td><td>32.86</td><td>27.64</td><td>2.97</td><td>34.18</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>861.29</td><td>30.63</td><td>46.00</td><td>-15.37</td><td>32.80</td><td>28.76</td><td>3.11</td><td>34.04</td><td>--</td><td>--</td><td>Peak</td></tr></table>												Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB		cm	deg	1	43.58	17.77	40.00	-22.23	32.36	19.54	0.66	34.79	--	--	Peak	2	150.28	17.71	43.50	-25.79	32.35	18.98	1.28	34.90	--	--	Peak	3	377.26	20.56	46.00	-25.44	32.36	20.87	2.03	34.70	--	--	Peak	4	548.95	23.82	46.00	-22.18	31.66	24.17	2.49	34.50	--	--	Peak	5	759.44	29.29	46.00	-16.71	32.86	27.64	2.97	34.18	--	--	Peak	6	861.29	30.63	46.00	-15.37	32.80	28.76	3.11	34.04	--	--	Peak
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																
		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB		cm	deg																																																																																																
	1	43.58	17.77	40.00	-22.23	32.36	19.54	0.66	34.79	--	--	Peak																																																																																																	
	2	150.28	17.71	43.50	-25.79	32.35	18.98	1.28	34.90	--	--	Peak																																																																																																	
	3	377.26	20.56	46.00	-25.44	32.36	20.87	2.03	34.70	--	--	Peak																																																																																																	
	4	548.95	23.82	46.00	-22.18	31.66	24.17	2.49	34.50	--	--	Peak																																																																																																	
	5	759.44	29.29	46.00	-16.71	32.86	27.64	2.97	34.18	--	--	Peak																																																																																																	
	6	861.29	30.63	46.00	-15.37	32.80	28.76	3.11	34.04	--	--	Peak																																																																																																	
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>43.58</td><td>17.77</td><td>40.00</td><td>-22.23</td><td>32.36</td><td>19.54</td><td>0.66</td><td>34.79</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>150.28</td><td>17.71</td><td>43.50</td><td>-25.79</td><td>32.35</td><td>18.98</td><td>1.28</td><td>34.90</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>377.26</td><td>20.56</td><td>46.00</td><td>-25.44</td><td>32.36</td><td>20.87</td><td>2.03</td><td>34.70</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>548.95</td><td>23.82</td><td>46.00</td><td>-22.18</td><td>31.66</td><td>24.17</td><td>2.49</td><td>34.50</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>759.44</td><td>29.29</td><td>46.00</td><td>-16.71</td><td>32.86</td><td>27.64</td><td>2.97</td><td>34.18</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>861.29</td><td>30.63</td><td>46.00</td><td>-15.37</td><td>32.80</td><td>28.76</td><td>3.11</td><td>34.04</td><td>--</td><td>--</td><td>Peak</td></tr></table>												Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB		cm	deg	1	43.58	17.77	40.00	-22.23	32.36	19.54	0.66	34.79	--	--	Peak	2	150.28	17.71	43.50	-25.79	32.35	18.98	1.28	34.90	--	--	Peak	3	377.26	20.56	46.00	-25.44	32.36	20.87	2.03	34.70	--	--	Peak	4	548.95	23.82	46.00	-22.18	31.66	24.17	2.49	34.50	--	--	Peak	5	759.44	29.29	46.00	-16.71	32.86	27.64	2.97	34.18	--	--	Peak	6	861.29	30.63	46.00	-15.37	32.80	28.76	3.11	34.04	--	--	Peak	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB		cm	deg																																																																																																	
1	43.58	17.77	40.00	-22.23	32.36	19.54	0.66	34.79	--	--	Peak																																																																																																		
2	150.28	17.71	43.50	-25.79	32.35	18.98	1.28	34.90	--	--	Peak																																																																																																		
3	377.26	20.56	46.00	-25.44	32.36	20.87	2.03	34.70	--	--	Peak																																																																																																		
4	548.95	23.82	46.00	-22.18	31.66	24.17	2.49	34.50	--	--	Peak																																																																																																		
5	759.44	29.29	46.00	-16.71	32.86	27.64	2.97	34.18	--	--	Peak																																																																																																		
6	861.29	30.63	46.00	-15.37	32.80	28.76	3.11	34.04	--	--	Peak																																																																																																		
Vertical																																																																																																													
																																																																																																													
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>62.01</td><td>16.95</td><td>40.00</td><td>-23.05</td><td>32.64</td><td>18.48</td><td>0.80</td><td>34.97</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>141.55</td><td>16.48</td><td>43.50</td><td>-27.02</td><td>31.86</td><td>18.27</td><td>1.25</td><td>34.90</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>353.98</td><td>18.53</td><td>46.00</td><td>-27.47</td><td>30.97</td><td>20.31</td><td>1.95</td><td>34.70</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>435.46</td><td>22.81</td><td>46.00</td><td>-23.19</td><td>32.88</td><td>22.36</td><td>2.20</td><td>34.63</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>639.16</td><td>25.38</td><td>46.00</td><td>-20.62</td><td>30.88</td><td>26.22</td><td>2.68</td><td>34.40</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>800.18</td><td>28.70</td><td>46.00</td><td>-17.30</td><td>31.93</td><td>27.84</td><td>3.03</td><td>34.10</td><td>--</td><td>--</td><td>Peak</td></tr></table>												Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB		cm	deg	1	62.01	16.95	40.00	-23.05	32.64	18.48	0.80	34.97	--	--	Peak	2	141.55	16.48	43.50	-27.02	31.86	18.27	1.25	34.90	--	--	Peak	3	353.98	18.53	46.00	-27.47	30.97	20.31	1.95	34.70	--	--	Peak	4	435.46	22.81	46.00	-23.19	32.88	22.36	2.20	34.63	--	--	Peak	5	639.16	25.38	46.00	-20.62	30.88	26.22	2.68	34.40	--	--	Peak	6	800.18	28.70	46.00	-17.30	31.93	27.84	3.03	34.10	--	--	Peak	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB		cm	deg																																																																																																	
1	62.01	16.95	40.00	-23.05	32.64	18.48	0.80	34.97	--	--	Peak																																																																																																		
2	141.55	16.48	43.50	-27.02	31.86	18.27	1.25	34.90	--	--	Peak																																																																																																		
3	353.98	18.53	46.00	-27.47	30.97	20.31	1.95	34.70	--	--	Peak																																																																																																		
4	435.46	22.81	46.00	-23.19	32.88	22.36	2.20	34.63	--	--	Peak																																																																																																		
5	639.16	25.38	46.00	-20.62	30.88	26.22	2.68	34.40	--	--	Peak																																																																																																		
6	800.18	28.70	46.00	-17.30	31.93	27.84	3.03	34.10	--	--	Peak																																																																																																		
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>62.01</td><td>16.95</td><td>40.00</td><td>-23.05</td><td>32.64</td><td>18.48</td><td>0.80</td><td>34.97</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>141.55</td><td>16.48</td><td>43.50</td><td>-27.02</td><td>31.86</td><td>18.27</td><td>1.25</td><td>34.90</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>353.98</td><td>18.53</td><td>46.00</td><td>-27.47</td><td>30.97</td><td>20.31</td><td>1.95</td><td>34.70</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>435.46</td><td>22.81</td><td>46.00</td><td>-23.19</td><td>32.88</td><td>22.36</td><td>2.20</td><td>34.63</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>639.16</td><td>25.38</td><td>46.00</td><td>-20.62</td><td>30.88</td><td>26.22</td><td>2.68</td><td>34.40</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>800.18</td><td>28.70</td><td>46.00</td><td>-17.30</td><td>31.93</td><td>27.84</td><td>3.03</td><td>34.10</td><td>--</td><td>--</td><td>Peak</td></tr></table>												Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB		cm	deg	1	62.01	16.95	40.00	-23.05	32.64	18.48	0.80	34.97	--	--	Peak	2	141.55	16.48	43.50	-27.02	31.86	18.27	1.25	34.90	--	--	Peak	3	353.98	18.53	46.00	-27.47	30.97	20.31	1.95	34.70	--	--	Peak	4	435.46	22.81	46.00	-23.19	32.88	22.36	2.20	34.63	--	--	Peak	5	639.16	25.38	46.00	-20.62	30.88	26.22	2.68	34.40	--	--	Peak	6	800.18	28.70	46.00	-17.30	31.93	27.84	3.03	34.10	--	--	Peak	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																	
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB		cm	deg																																																																																																	
1	62.01	16.95	40.00	-23.05	32.64	18.48	0.80	34.97	--	--	Peak																																																																																																		
2	141.55	16.48	43.50	-27.02	31.86	18.27	1.25	34.90	--	--	Peak																																																																																																		
3	353.98	18.53	46.00	-27.47	30.97	20.31	1.95	34.70	--	--	Peak																																																																																																		
4	435.46	22.81	46.00	-23.19	32.88	22.36	2.20	34.63	--	--	Peak																																																																																																		
5	639.16	25.38	46.00	-20.62	30.88	26.22	2.68	34.40	--	--	Peak																																																																																																		
6	800.18	28.70	46.00	-17.30	31.93	27.84	3.03	34.10	--	--	Peak																																																																																																		

Appendix B. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11ac VHT80	100	-	-	10Hz
802.11ac VHT160	100	-	-	10Hz
802.11ax HE80	100	-	-	10Hz

802.11ac VHT80

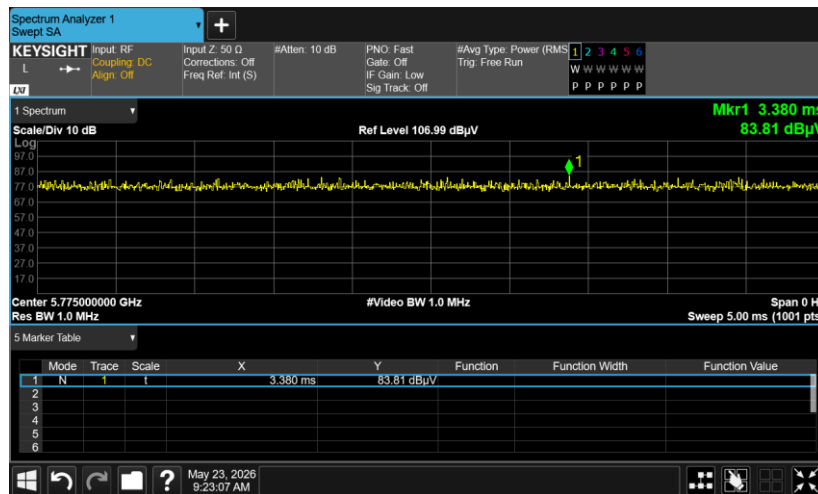

802.11ac VHT160





802.11ax HE80

