FCC TEST REPORT

Client Name	:	Dong guan Good Luck Furniture Industrial Co.,Ltd
Address	:	101# Room No. 65 Qingxi Street Qingxi Town DongGuan CIty, GuangDong Province
Product Name	:	Electric Height Adjustable Standing Desk
Date	:	Dec. 02, 2021

Shenzhen Anbotek Compliance Laboratory Limited

Contents

1. General Information....4
1.1. Client Information....4
1.2. Description of Device (EUT)....4
1.3. Auxiliary Equipment Used During Test....5
1.4. Description of Test Modes....5
1.5. Description Of Test Setup....6
1.6. Test Equipment List....7
1.7. Measurement Uncertainty....8
1.8. Description of Test Facility....8
2. Summary of Test Results....9
3. Conducted Emission Test....10
3.1. Test Standard and Limit....10
3.2. Test Setup....10
3.3. Test Procedure....10
3.4. Test Data....10
4. Radiation Spurious Emission....15
4.1. Test Standard and Limit....15
4.2. Test Setup....15
4.3. Test Procedure....16
4.4. Test Data....16
5. Antenna Requirement....21
5.1. Test Standard and Requirement....21
5.2. Antenna Connected Construction....21
APPENDIX I -- TEST SETUP PHOTOGRAPH....22
APPENDIX II -- EXTERNAL PHOTOGRAPH....24
APPENDIX III -- INTERNAL PHOTOGRAPH....29

TEST REPORT

Applicant	:	Dong guan Good Luck Furniture Industrial Co.,Ltd
Manufacturer	:	Dong guan Good Luck Furniture Industrial Co.,Ltd
Product Name	:	Electric Height Adjustable Standing Desk
Model No.	:	K312, K304
Trade Mark	:	KOWO
Rating(s)	:	Input: DC 24V, 2.1A Wireless output:10W
Test Standard(s)	**:**	**FCC Part15 Subpart C, Paragraph 15.209**
Test Method(s)	**:**	**ANSI C63.10: 2020**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt	Aug. 19, 2021
Date of Test	Aug. 19~Nov. 22, 2021
Prepared By	Ella Liang (Ella Liang)
Approved & Authorized Signer	Kingkong Jin (Kingkong Jin)

1. General Information

1.1. Client Information

Applicant	:	Dong guan Good Luck Furniture Industrial Co.,Ltd
Address	:	101# Room No. 65 Qingxi Street Qingxi Town DongGuan CIty, GuangDong Province
Manufacturer	:	Dong guan Good Luck Furniture Industrial Co.,Ltd
Address	:	101# Room No. 65 Qingxi Street Qingxi Town DongGuan CIty, GuangDong Province
Factory	:	Dong guan Good Luck Furniture Industrial Co.,Ltd
Address	:	101# Room No. 65 Qingxi Street Qingxi Town DongGuan CIty, GuangDong Province

1.2. Description of Device (EUT)

Product Name	:	Electric Height Adjustable Standing Desk	
Model No.	:	K312, K304 (Note: All samples are the same except the model number and appearance colors, so we prepare “K312” for test only.)	
Trade Mark	:	KOWO	
Test Power Supply	:	AC 120V, 60Hz for Adapter/ AC 240V, 60Hz for Adapter	
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)	
Product Description	:	Operation Frequency:	110.1-205KHz
		Modulation Type:	FSK
		Antenna Type:	Inductive loop coil Antenna
		Antenna Gain(Peak):	0 dBi (Provided by customer)
		Adapter:	M/N: GRP-60W240021-A Input: AC 100-240V, 50/60Hz, 1.5A Output: 24V⎓2.1A, 50.4W
Remark: 1) For a more detailed features description, please refer to the manufacturer’s specifications or the User’s Manual.			

1.3. Auxiliary Equipment Used During Test

Wireless charging load	:	Manufacturer: Shenzhen Ouju Technology Co., Ltd. M/N: CD2531 Power: 5W/7.5W/10W/15W Last Cal.: Oct. 26, 2020 Cal. Interval: 1 Year

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Wireless Charging Mode

For Conducted Emission	
Final Test Mode	Description
Mode 1	Wireless Charging Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	Wireless Charging Mode

Note: (1)Test channel is 0.1303MHz.

(2) All the situation(full load, half load and empty load) has been tested,only the worst situation (full load 10W) was recorded in the report.

1.5. Description Of Test Setup

CE

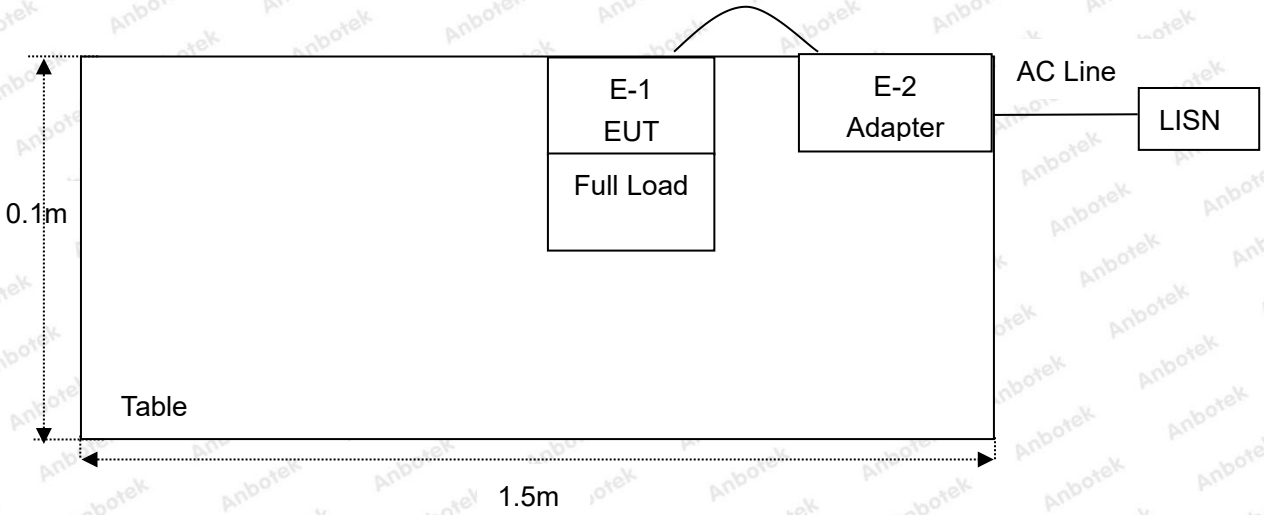

RE

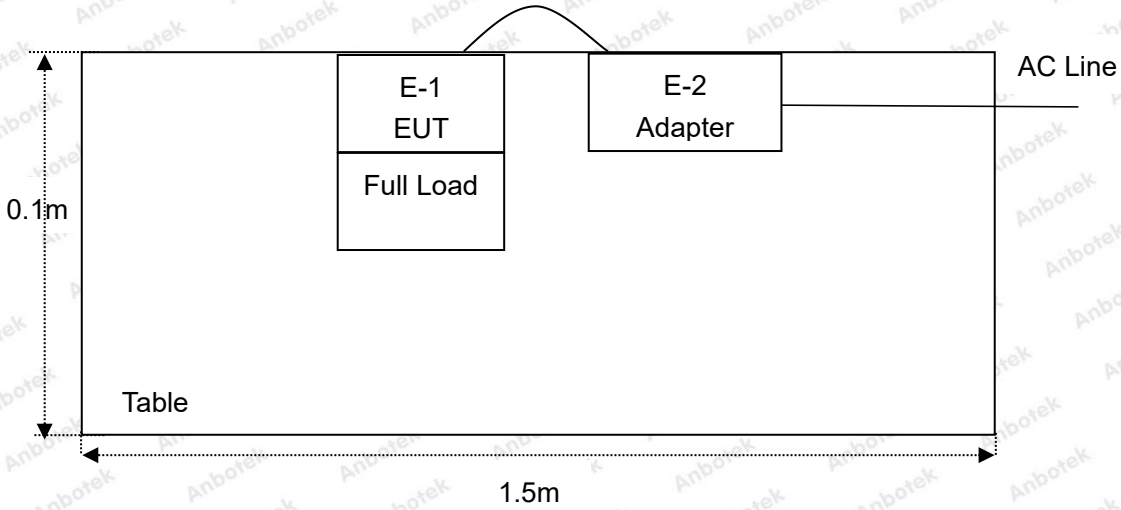

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jul 05, 2021	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 22, 2021	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 22, 2021	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2021	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 22, 2021	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Oct. 22, 2021	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Oct. 22, 2021	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Oct. 22, 2021	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 22, 2021	2 Year
10.	Horn Antenna	A-INFO	LB-180400-KF	J211060628	Oct. 22, 2021	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 22, 2021	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 22, 2021	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Oct. 22, 2021	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Oct. 22, 2021	1 Year
16.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 22, 2021	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 22, 2021	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 22, 2021	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 22, 2021	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Oct. 22, 2021	1 Year

1.7. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.
1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results

Standard Section	Test Item	Result
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS
FCC Part 15, Paragraph 15.209(a)(f)	Spurious Emission	PASS
Part 15.203	Antenna Requirement	PASS

3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
Remark: (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

3.2. Test Setup

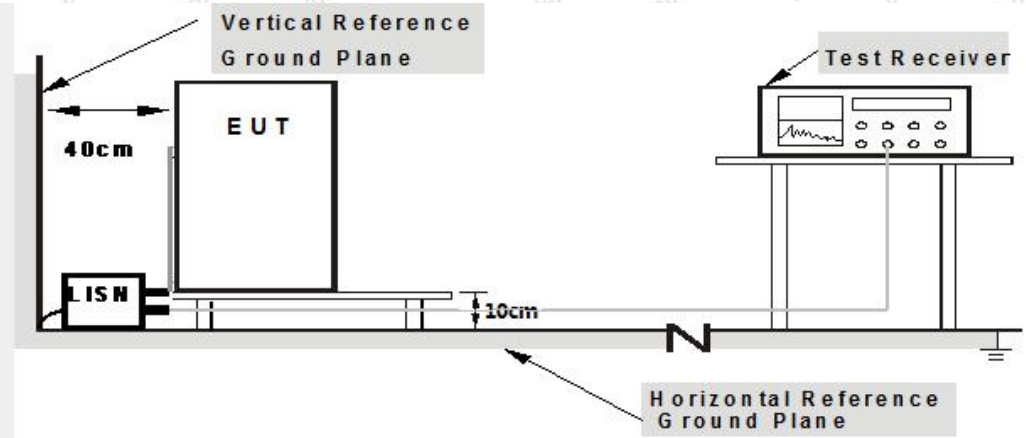

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 240V, 60Hz for adapter
Comment: Live Line
Tem.: 23.1℃ Hum.: 50%

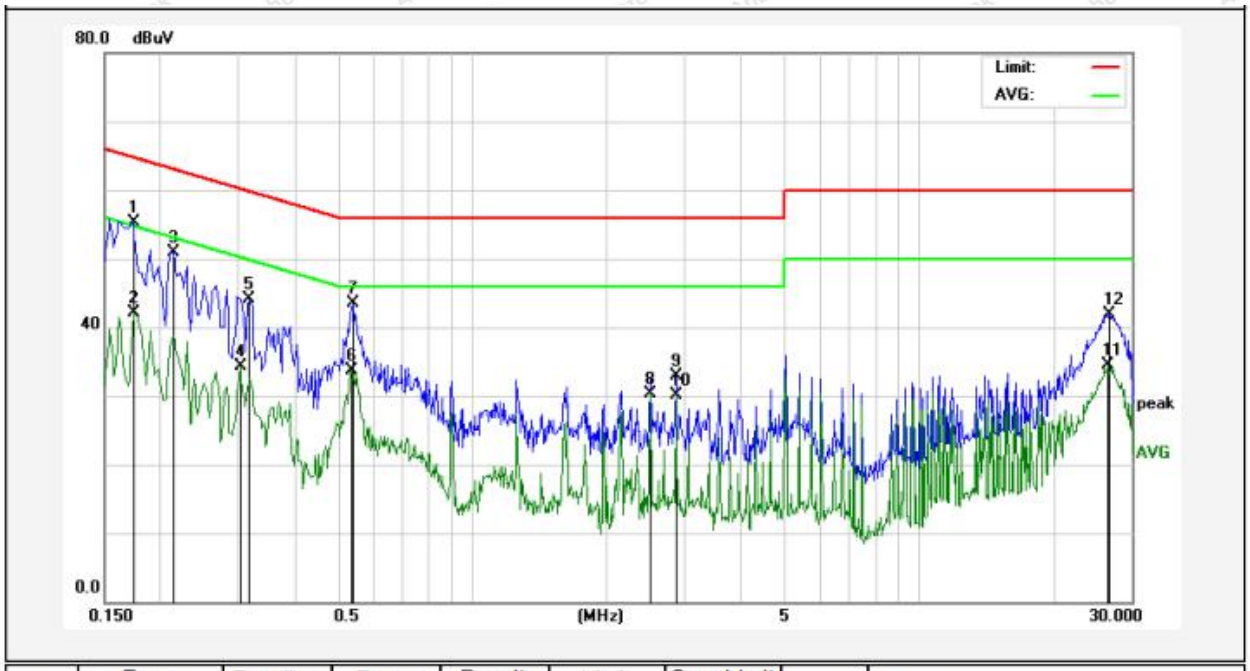

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1740	45.20	10.12	55.32	64.76	-9.44	QP	
2	0.1740	32.03	10.12	42.15	54.76	-12.61	AVG	
3	0.2140	40.69	10.12	50.81	63.04	-12.23	QP	
4	0.3020	24.14	10.13	34.27	50.19	-15.92	AVG	
5	0.3180	33.92	10.13	44.05	59.76	-15.71	QP	
6	0.5340	23.59	10.15	33.74	46.00	-12.26	AVG	
7	0.5420	33.31	10.15	43.46	56.00	-12.54	QP	
8	2.5059	20.28	10.12	30.40	46.00	-15.60	AVG	
9	2.8620	22.78	10.12	32.90	56.00	-23.10	QP	
10	2.8620	20.02	10.12	30.14	46.00	-15.86	AVG	
11	26.5180	24.20	10.23	34.43	50.00	-15.57	AVG	
12	26.7980	31.76	10.24	42.00	60.00	-18.00	QP	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 240V, 60Hz for adapter
Comment: Neutral Line
Tem.: 23.1℃ Hum.: 50%

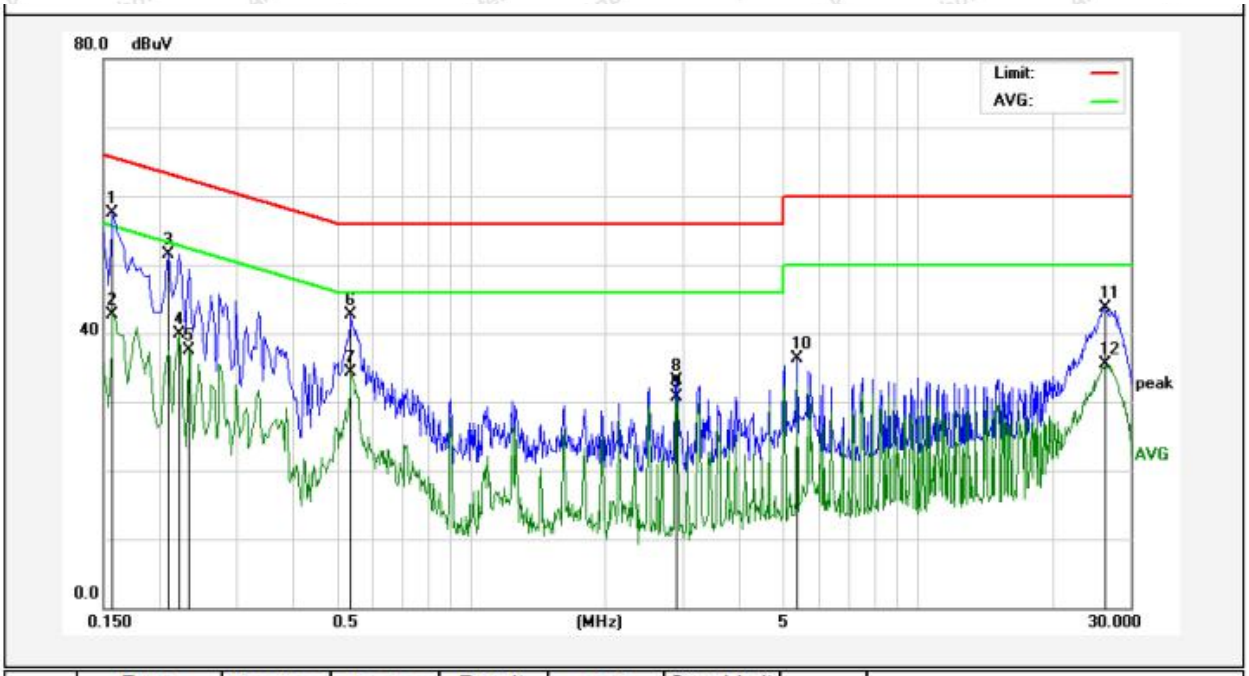

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1580	47.39	10.12	57.51	65.56	-8.05	QP	
2	0.1580	32.68	10.12	42.80	55.56	-12.76	AVG	
3	0.2100	41.32	10.12	51.44	63.20	-11.76	QP	
4	0.2220	29.81	10.12	39.93	52.74	-12.81	AVG	
5	0.2340	27.31	10.12	37.43	52.30	-14.87	AVG	
6	0.5380	32.53	10.15	42.68	56.00	-13.32	QP	
7	0.5380	24.17	10.15	34.32	46.00	-11.68	AVG	
8	2.8980	23.01	10.12	33.13	56.00	-22.87	QP	
9	2.8980	20.59	10.12	30.71	46.00	-15.29	AVG	
10	5.3740	26.11	10.11	36.22	60.00	-23.78	QP	
11	26.3180	33.42	10.22	43.64	60.00	-16.36	QP	
12	26.3180	25.23	10.22	35.45	50.00	-14.55	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 120V, 60Hz for adapter
Comment: Live Line
Tem.: 23.1℃ Hum.: 50%

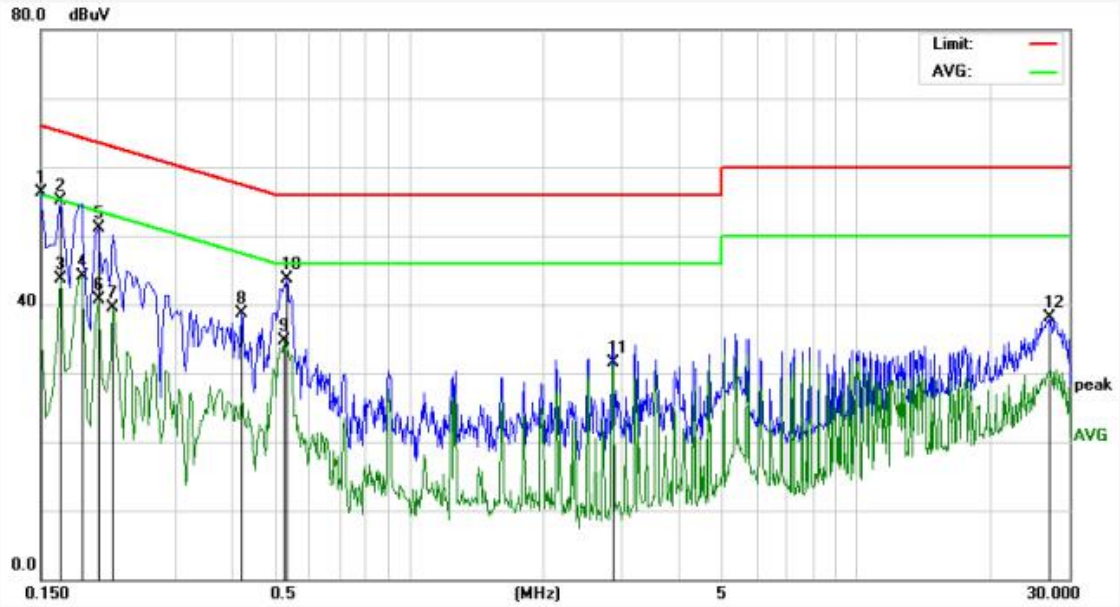

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1499	46.18	10.11	56.29	66.00	-9.71	QP	
2	0.1660	44.98	10.12	55.10	65.15	-10.05	QP	
3	0.1660	33.66	10.12	43.78	55.15	-11.37	AVG	
4	0.1860	33.94	10.12	44.06	54.21	-10.15	AVG	
5	0.2020	41.00	10.12	51.12	63.52	-12.40	QP	
6	0.2020	30.66	10.12	40.78	53.52	-12.74	AVG	
7	0.2180	29.29	10.12	39.41	52.89	-13.48	AVG	
8	0.4220	28.63	10.12	38.75	57.41	-18.66	QP	
9	0.5260	24.57	10.15	34.72	46.00	-11.28	AVG	
10	0.5340	33.63	10.15	43.78	56.00	-12.22	QP	
11	2.8540	21.46	10.12	31.58	46.00	-14.42	AVG	
12	26.9860	27.81	10.25	38.06	60.00	-21.94	QP	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 120V, 60Hz for adapter
Comment: Neutral Line
Tem.: 23.1℃ Hum.: 50%

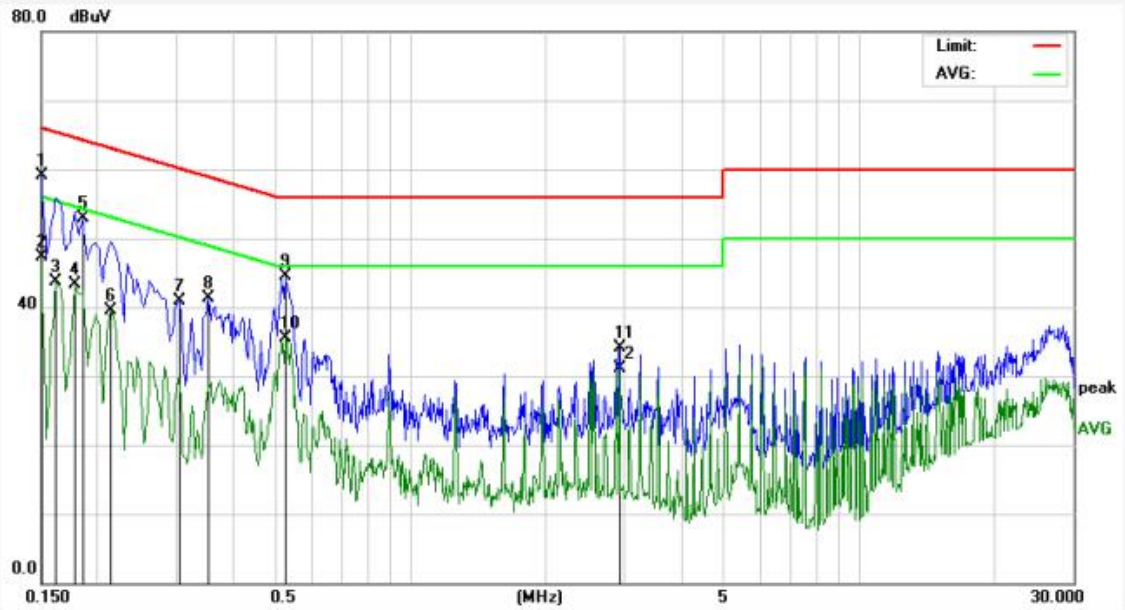

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	48.90	10.11	59.01	65.99	-6.98	QP	
2	0.1500	37.16	10.11	47.27	55.99	-8.72	AVG	
3	0.1620	33.59	10.12	43.71	55.36	-11.65	AVG	
4	0.1780	33.13	10.12	43.25	54.57	-11.32	AVG	
5	0.1860	42.80	10.12	52.92	64.21	-11.29	QP	
6	0.2140	29.41	10.12	39.53	53.04	-13.51	AVG	
7	0.3060	30.71	10.13	40.84	60.08	-19.24	QP	
8	0.3540	31.09	10.12	41.21	58.87	-17.66	QP	
9	0.5260	34.38	10.15	44.53	56.00	-11.47	QP	
10	0.5260	25.37	10.15	35.52	46.00	-10.48	AVG	
11	2.9180	23.97	10.12	34.09	56.00	-21.91	QP	
12	2.9180	20.96	10.12	31.08	46.00	-14.92	AVG	

4. Radiation Spurious Emission

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:
(1)The lower limit shall apply at the transition frequency.
(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

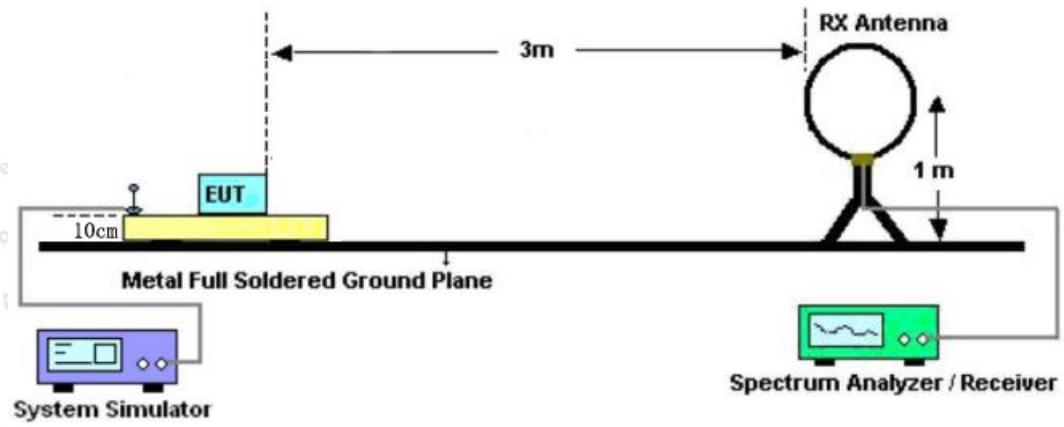

Figure 1. Below 30MHz

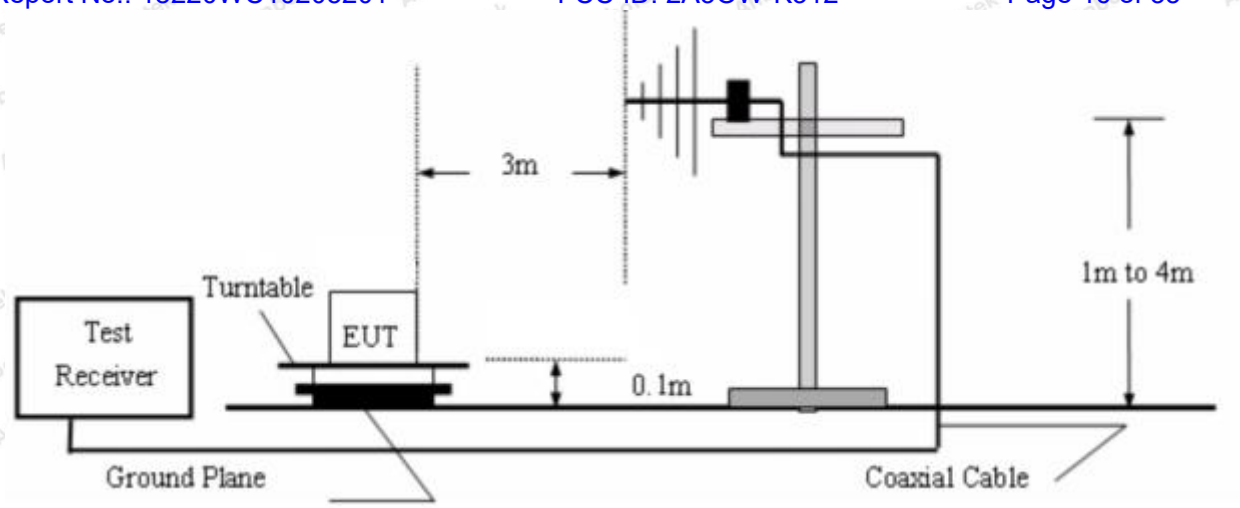

Figure 2. 30MHz to 1GHz

4.3. Test Procedure

For above 1GHz: The EUT is placed on a turntable, which is 0.1m above the ground plane.
The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:
RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:
RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:
RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS

Note: The data is in TX mode, and this is the worst mode.

Test Results

(Between 9KHz – 30MHz)

Standard:	**FCC PART15 C _3m**	**Power Source:**	**AC 120V, 60Hz for adapter**
Test item:	**Radiation Test**	**Temp.(C)/Hum.(%RH):**	**22.4℃/49%RH**
Test Mode:	**Mode 1**	**Distance:**	**3m**

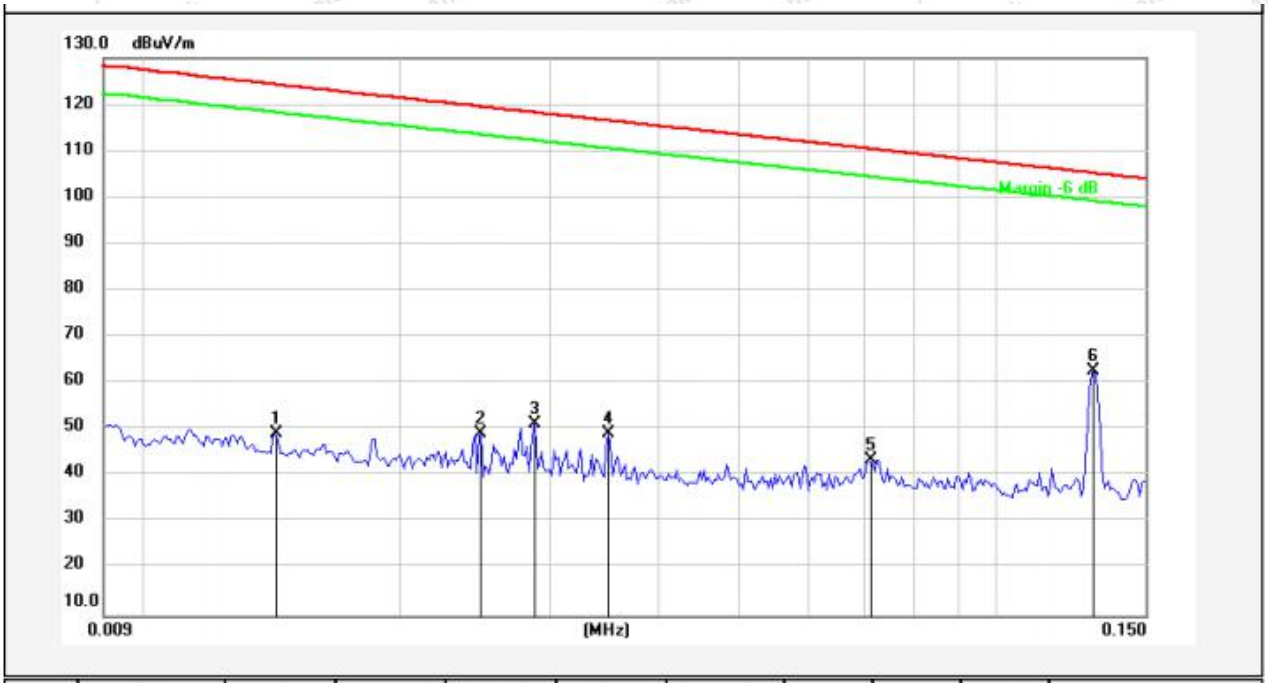

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	0.0143	28.94	20.22	49.16	124.31	-75.15	AV			
2	0.0249	28.90	20.38	49.28	119.52	-70.24	AV			
3	0.0288	30.72	20.41	51.13	118.26	-67.13	AV			
4	0.0351	28.55	20.49	49.04	116.56	-67.52	AV			
5	0.0710	23.12	20.37	43.49	110.48	-66.99	AV			
6	0.1303	42.45	20.34	62.79	105.23	-42.44	AV			

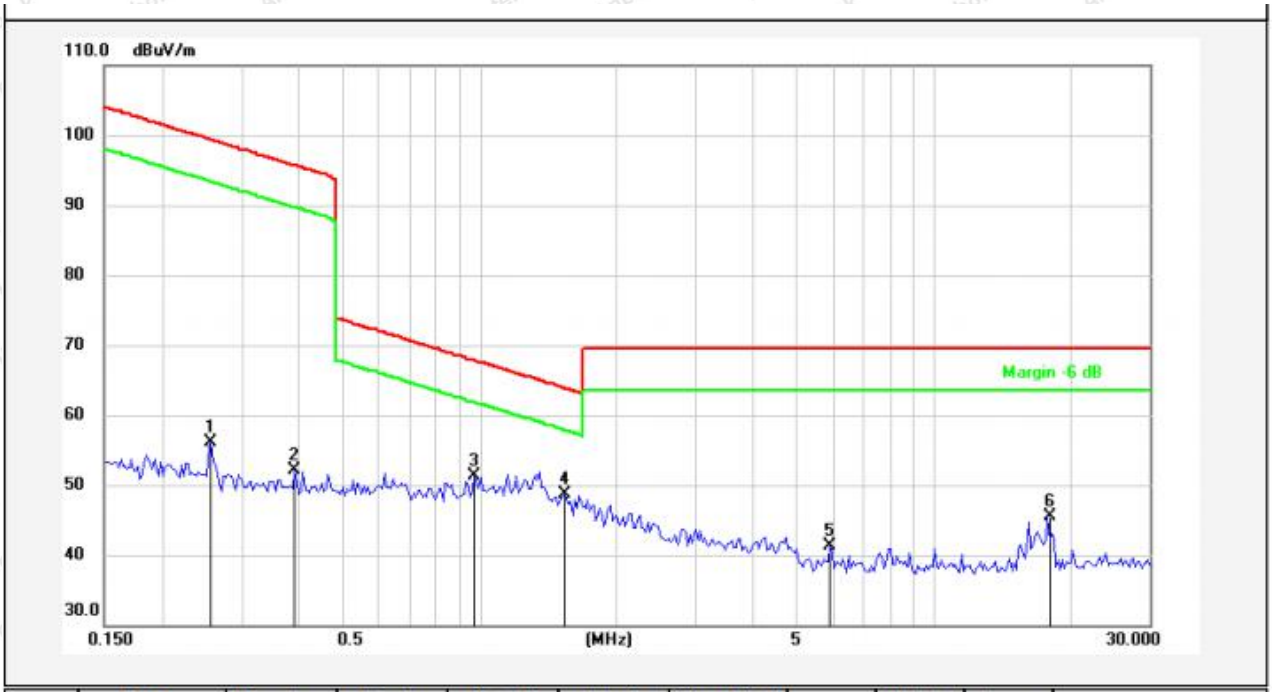

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	0.2575	35.76	20.30	56.06	99.37	-43.31	AV			
2	0.3933	31.81	20.28	52.09	95.70	-43.61	AV			
3	0.9787	30.97	20.25	51.22	67.81	-16.59	QP			
4	1.5436	28.49	20.27	48.76	63.86	-15.10	QP			
5	5.9293	20.95	20.39	41.34	69.50	-28.16	QP			
6	17.8493	24.97	20.57	45.54	69.50	-23.96	QP			

Remark: According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.

(Between 30MHz –1000 MHz)

Standard:	**FCC PART15 C _3m**	**Polarization:**	**Horizontal**
Test item:	**Radiation Test**	**Power Source:**	**AC 120V, 60Hz for adapter**
Test Mode:	**Mode 1**	**Temp.(C)/Hum.(%RH):**	**24.3℃/46%RH**
Distance:	**3m**		

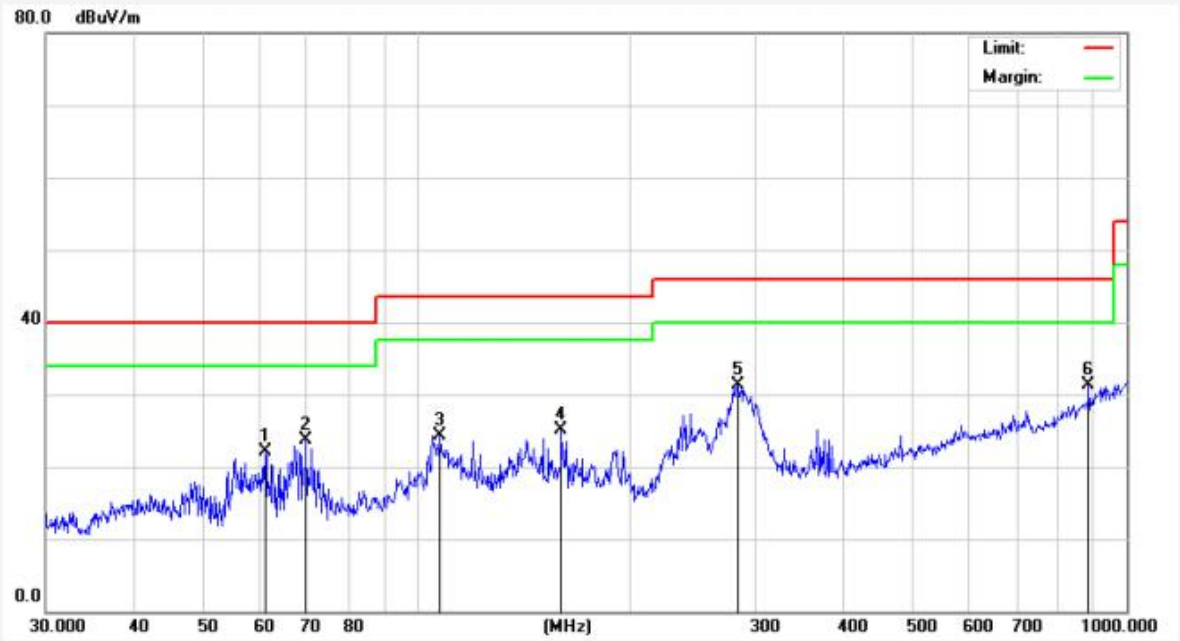

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	61.1316	38.69	-16.60	22.09	40.00	-17.91	QP	100	0	
2	69.8450	44.53	-20.76	23.77	40.00	-16.23	QP	100	360	
3	107.8877	45.21	-20.85	24.36	43.50	-19.14	QP	100	0	
4	159.7844	46.84	-21.77	25.07	43.50	-18.43	QP	100	360	
5	283.9791	47.01	-15.75	31.26	46.00	-14.74	QP	100	0	
6	884.5027	33.46	-2.16	31.30	46.00	-14.70	QP	100	360	

Standard:	**FCC PART15 C _3m**	**Polarization:**	**Vertical**
Test item:	**Radiation Test**	**Power Source:**	**AC 120V, 60Hz for adapter**
Test Mode:	**Mode 1**	**Temp.(C)/Hum.(%RH):**	**24.3℃/46%RH**
Distance:	**3m**		

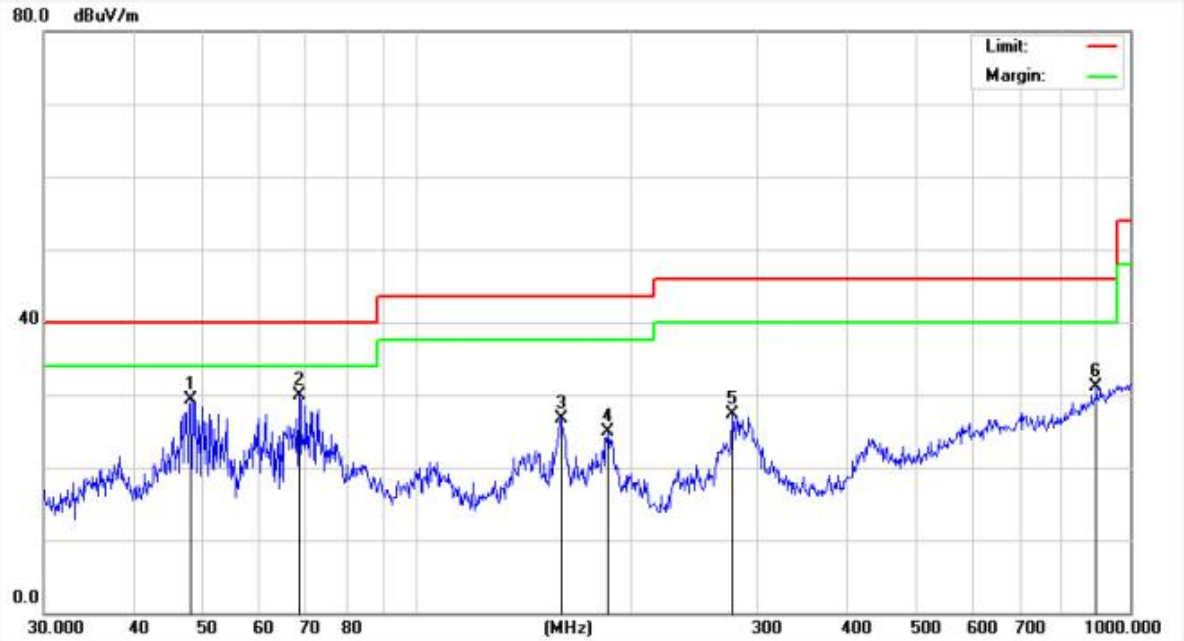

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	48.1625	43.81	-14.58	29.23	40.00	-10.77	QP	100	0	
2	68.3907	48.18	-18.37	29.81	40.00	-10.19	QP	100	360	
3	159.7844	46.14	-19.44	26.70	43.50	-16.80	QP	100	0	
4	185.1379	42.93	-17.98	24.95	43.50	-18.55	QP	100	360	
5	277.0935	41.49	-14.26	27.23	46.00	-18.77	QP	100	0	
6	896.9963	32.79	-1.78	31.01	46.00	-14.99	QP	100	360	

5. Antenna Requirement

5.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

5.2. Antenna Connected Construction

The antenna is a Inductive loop coil Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement

Photo of Radiation Emission Test

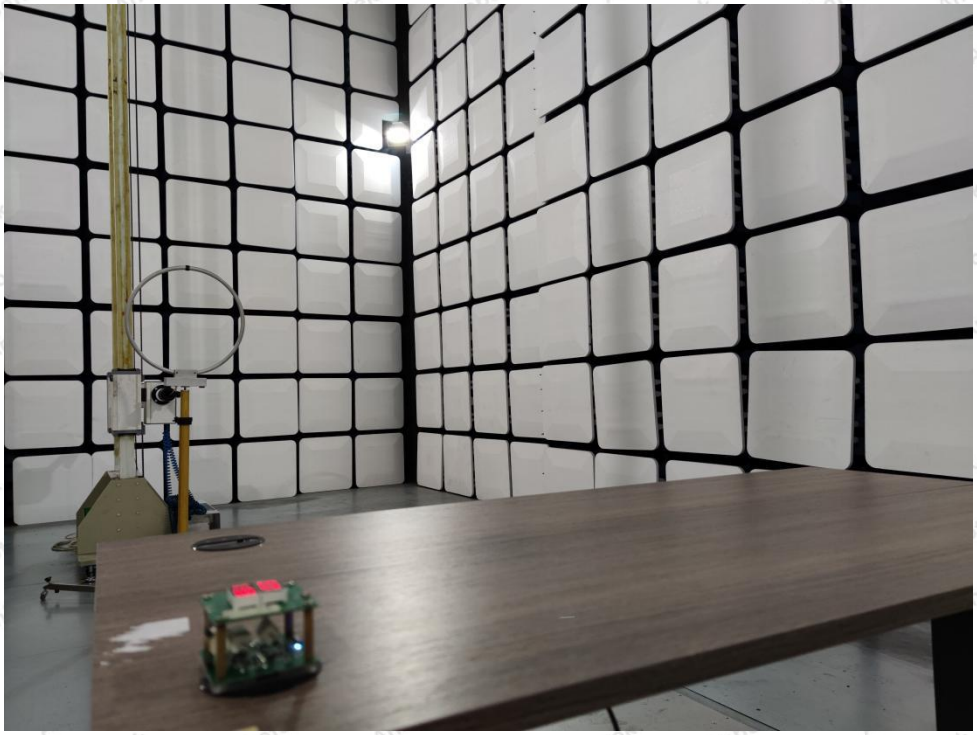

APPENDIX II -- EXTERNAL PHOTOGRAPH

AC/DC ADAPTER
Class 2 Power Unit
MODEL NO.:GRP-60W240021-A
INPUT:100-240V~,50/60Hz, 1.5A
OUTPUT:24.0V⎓2.1A,50.4W
DATE CODE:10.2021
EFFICIENCY LEVEL:
CAUTION:
Risk of electric shock
Dry location use only
See the instruction manual for
Proper selection of the power
Supply cord
Made In China
Manufacturer:Shenzhen Green Power Electronic Technology Co.,Ltd.
UK CA
NOM
NYCE
LISTED
ta:25°C
IP20

APPENDIX III -- INTERNAL PHOTOGRAPH

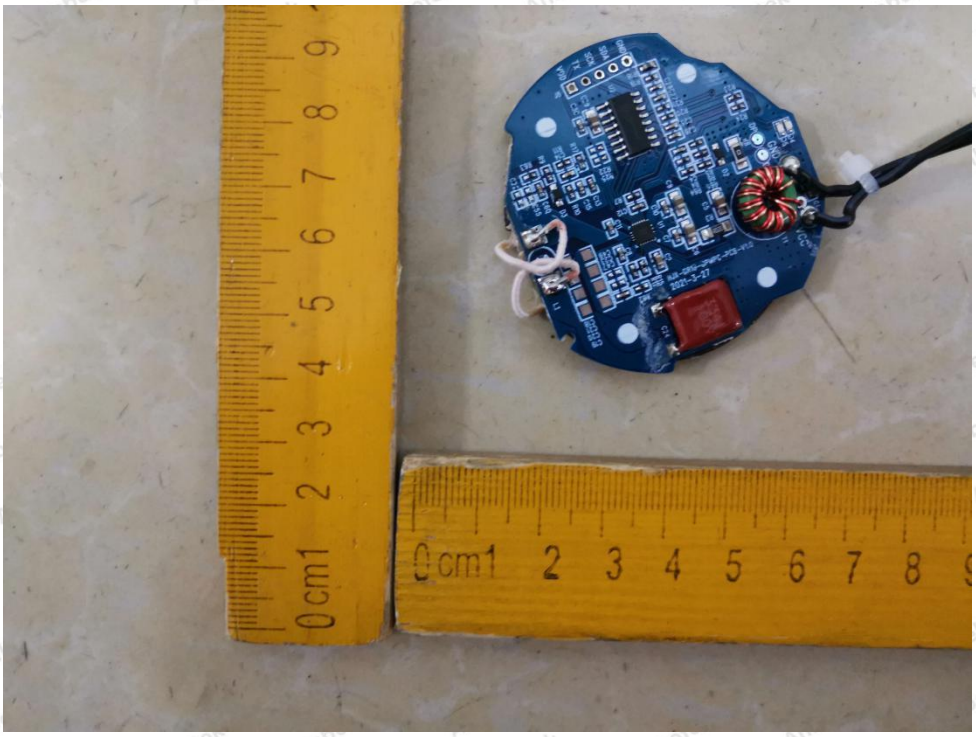

ANT

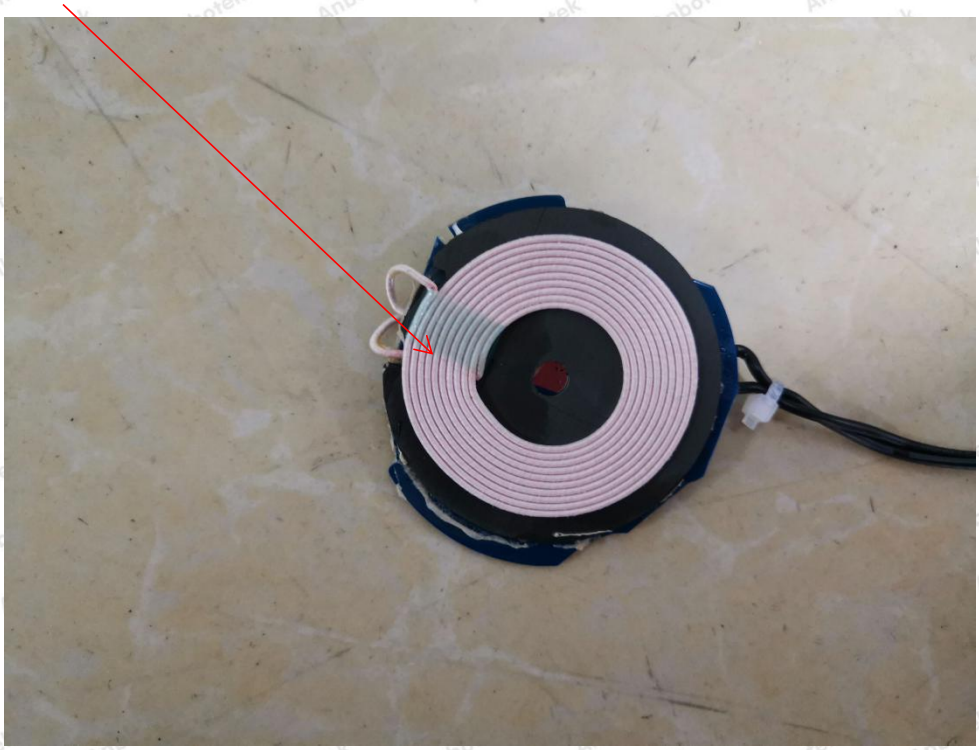

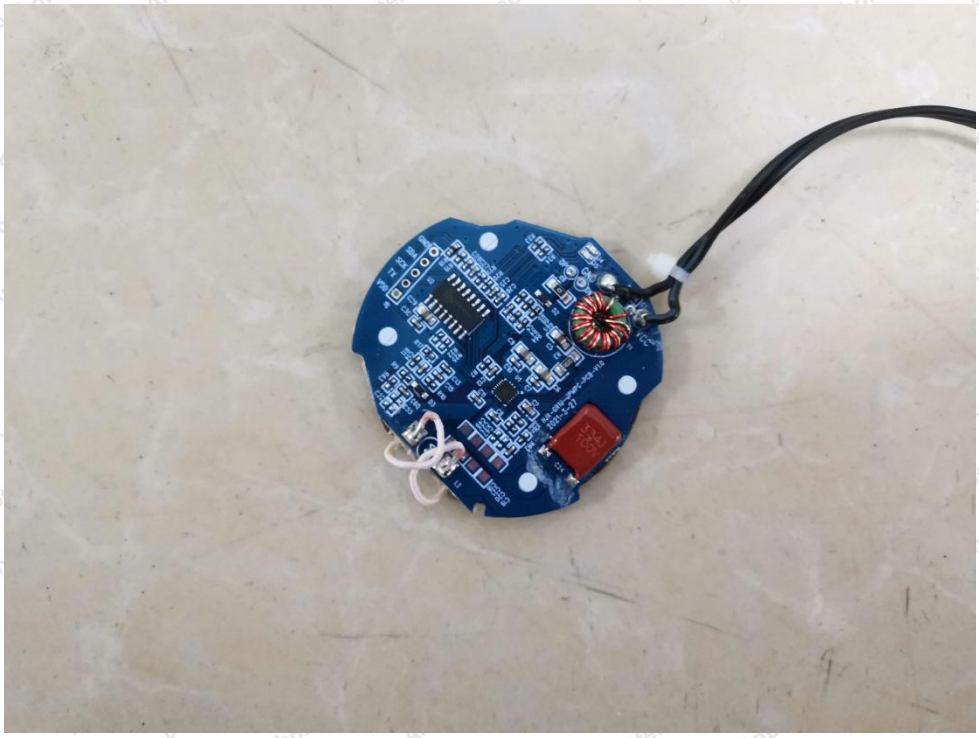

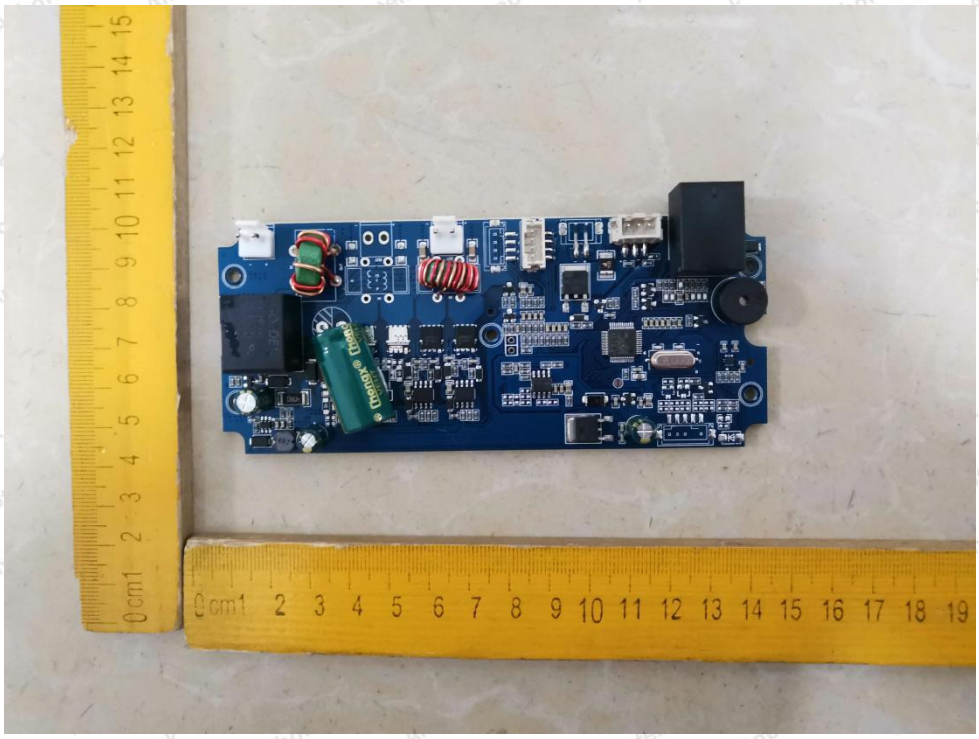

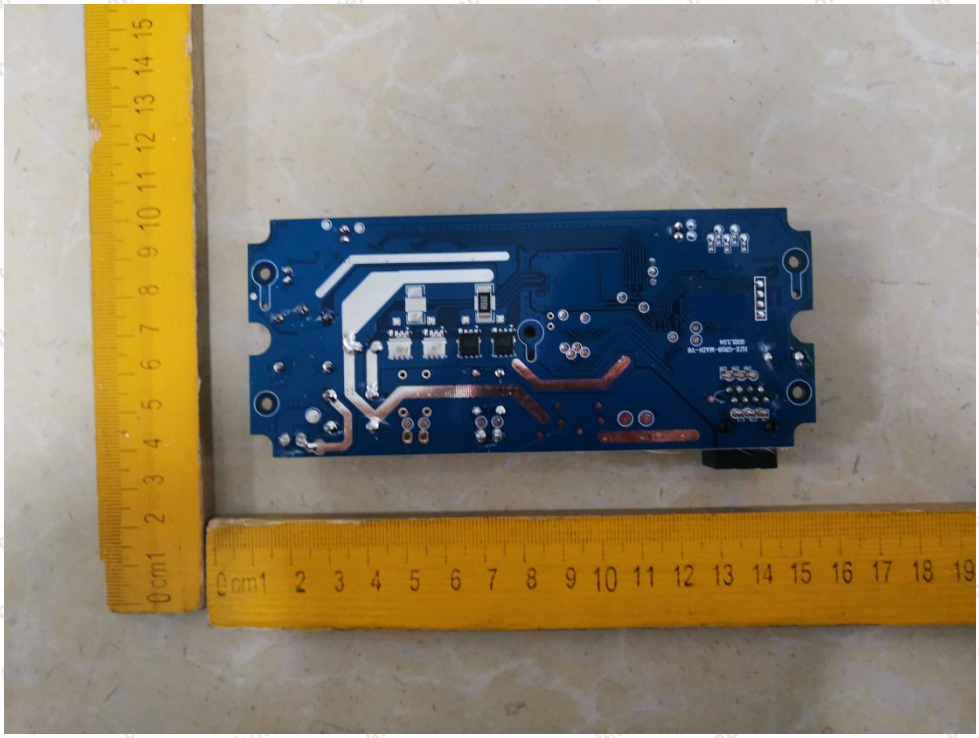

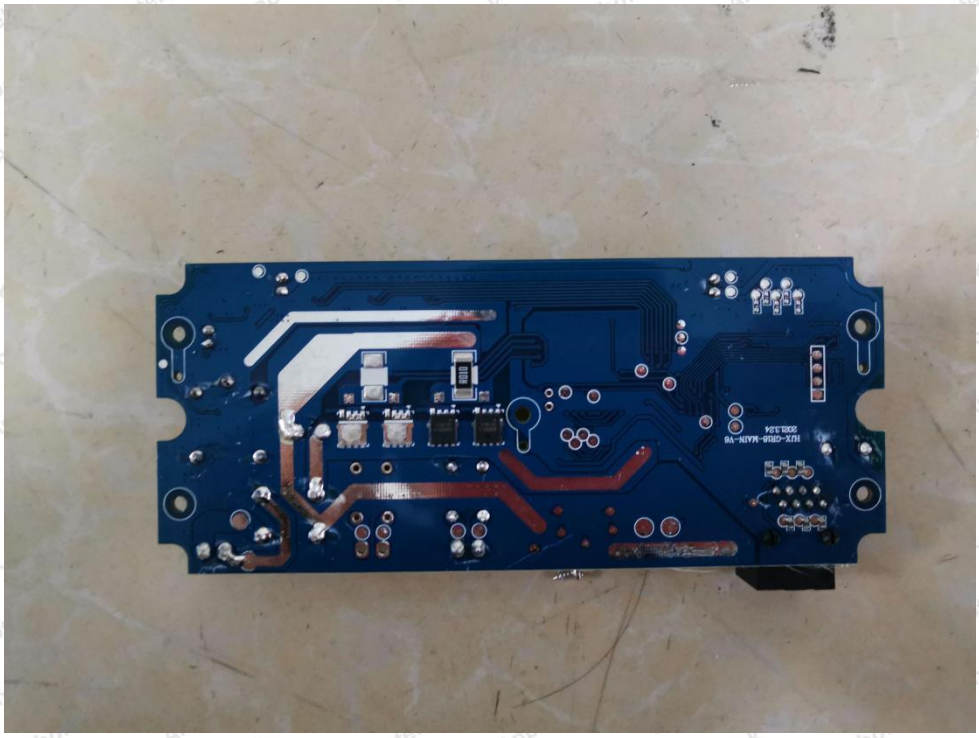

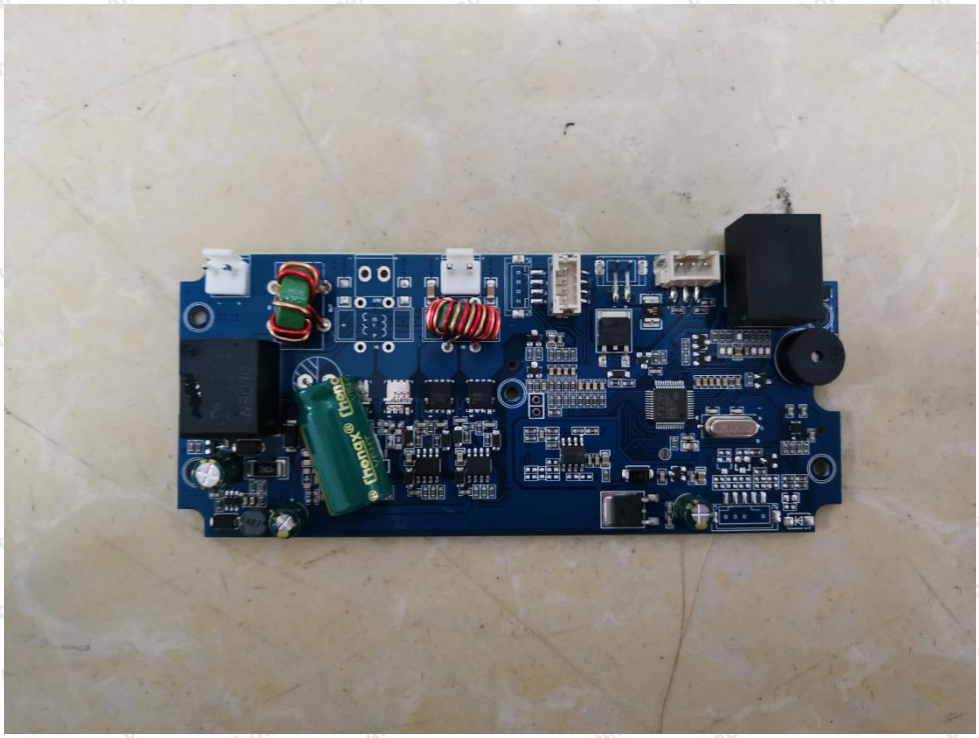

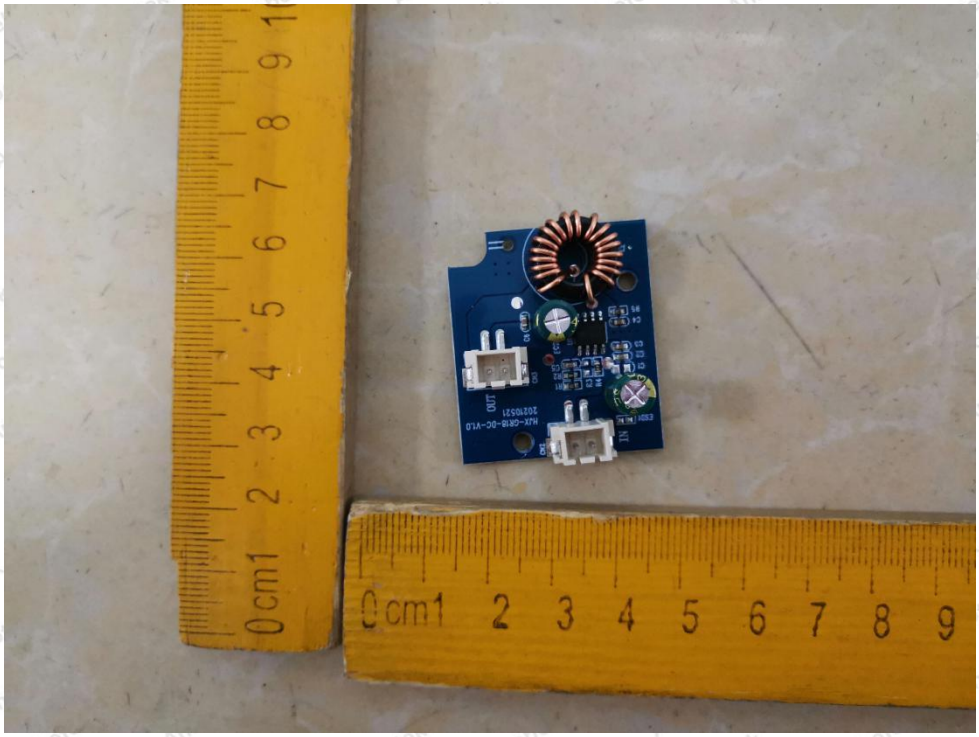
0cm1 2 3 4 5 6 7 8 9
0cm1 2 3 4 5 6 7 8 9

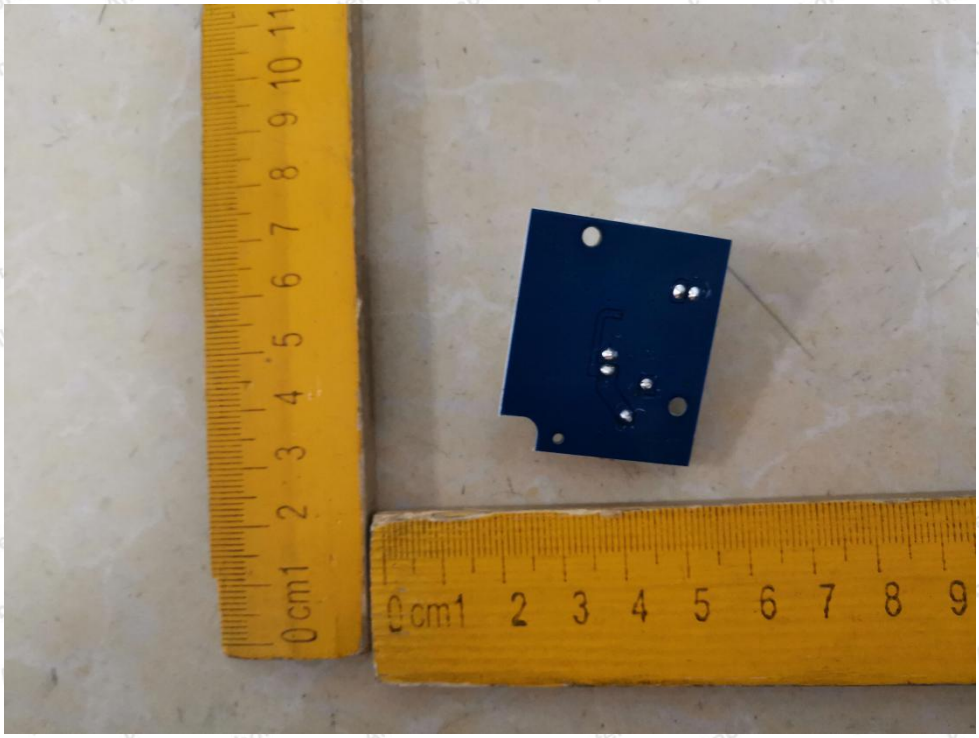
0cm1 2 3 4 5 6 7 8 9 10 11
0cm1 2 3 4 5 6 7 8 9

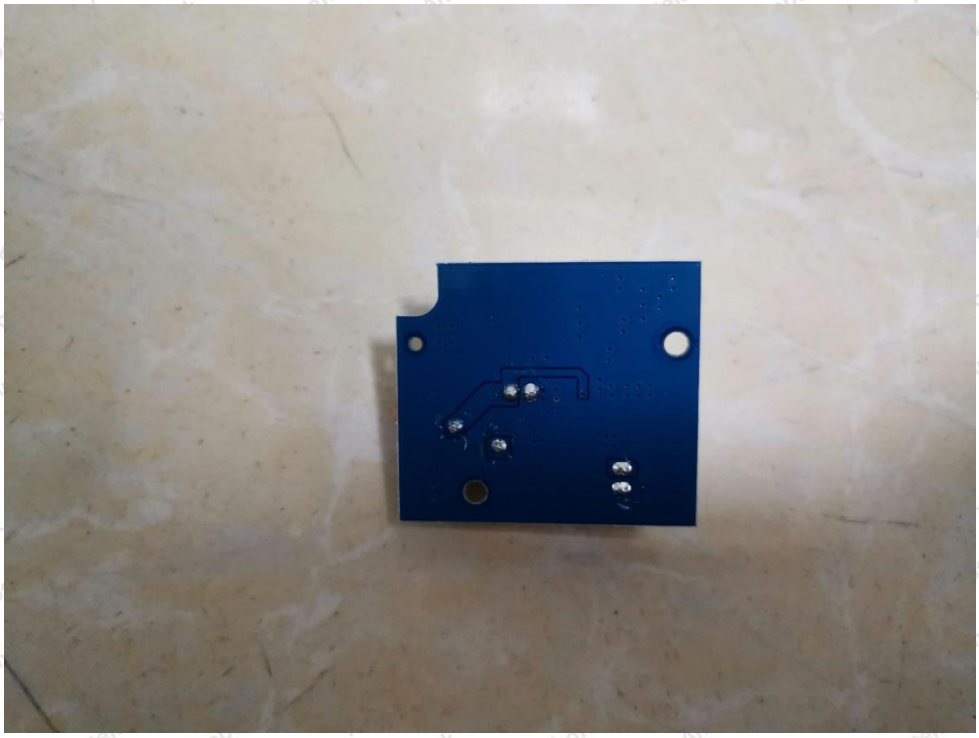

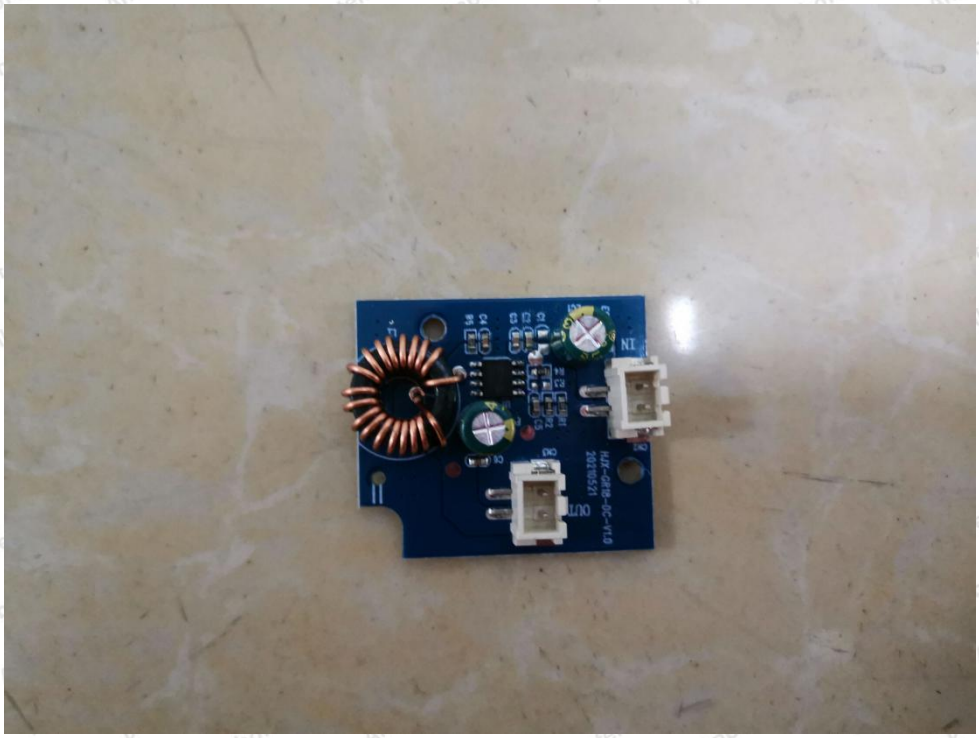

---------- End of Report ----------