


Test Data

Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	2.483	30	Pass
NVNT	1-DH1	2441	Ant1	3.766	30	Pass
NVNT	1-DH1	2480	Ant1	3.038	30	Pass
NVNT	2-DH1	2402	Ant1	1.722	21	Pass
NVNT	2-DH1	2441	Ant1	3.03	21	Pass
NVNT	2-DH1	2480	Ant1	2.338	21	Pass
NVNT	3-DH1	2402	Ant1	1.724	21	Pass
NVNT	3-DH1	2441	Ant1	3.092	21	Pass
NVNT	3-DH1	2480	Ant1	2.341	21	Pass

Test Graphs


Power NVNT 1-DH1 2402MHz Ant1

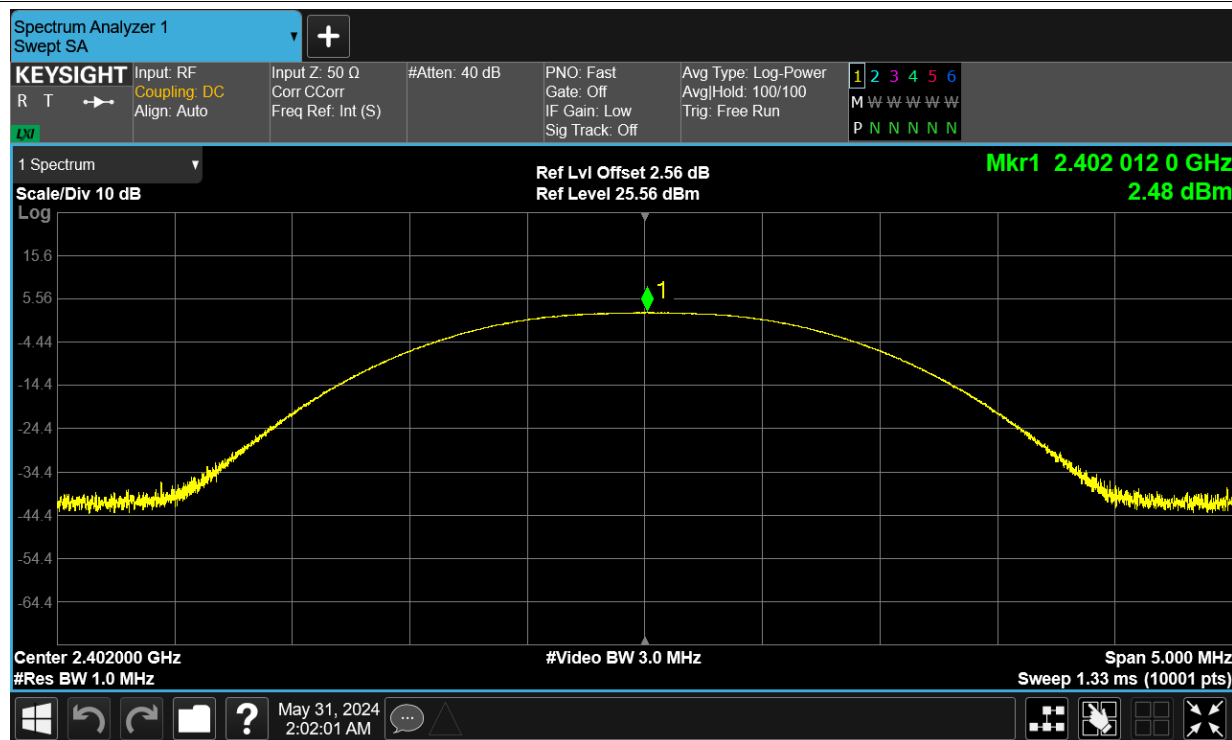


Power NVNT 1-DH1 2441MHz Ant1

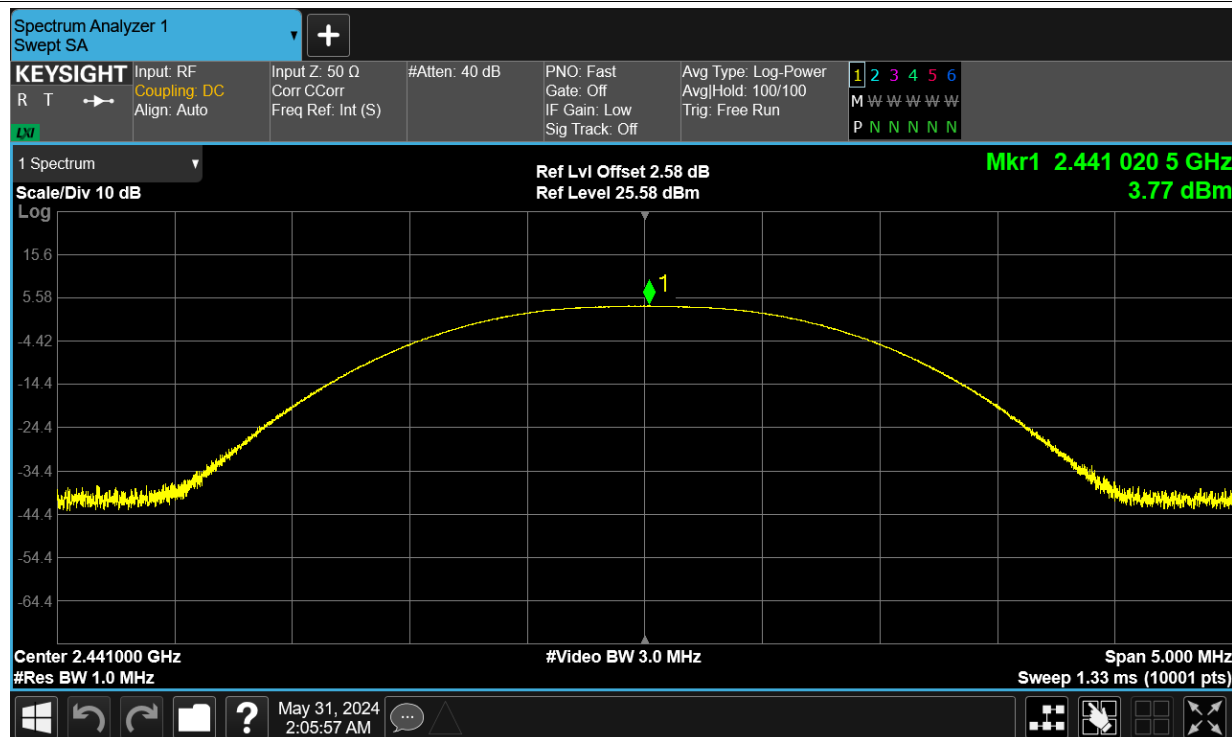


Power NVNT 1-DH1 2480MHz Ant1

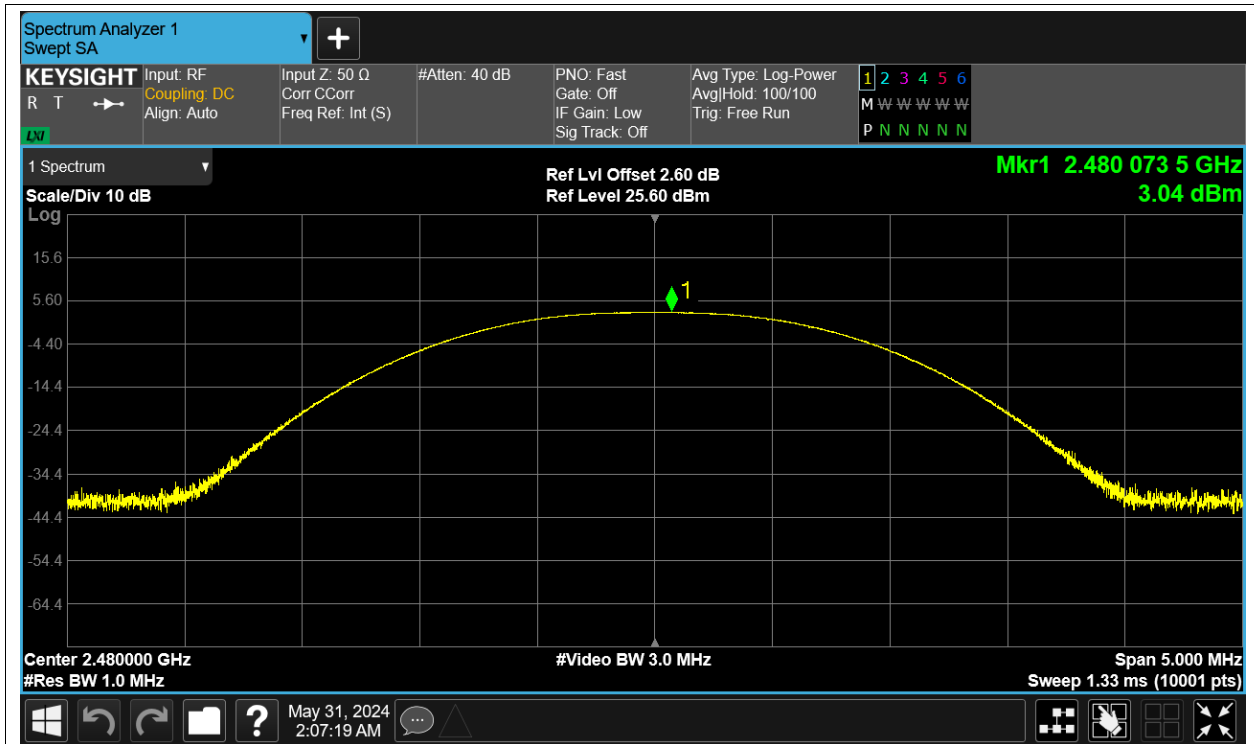


Power NVNT 2-DH1 2402MHz Ant1

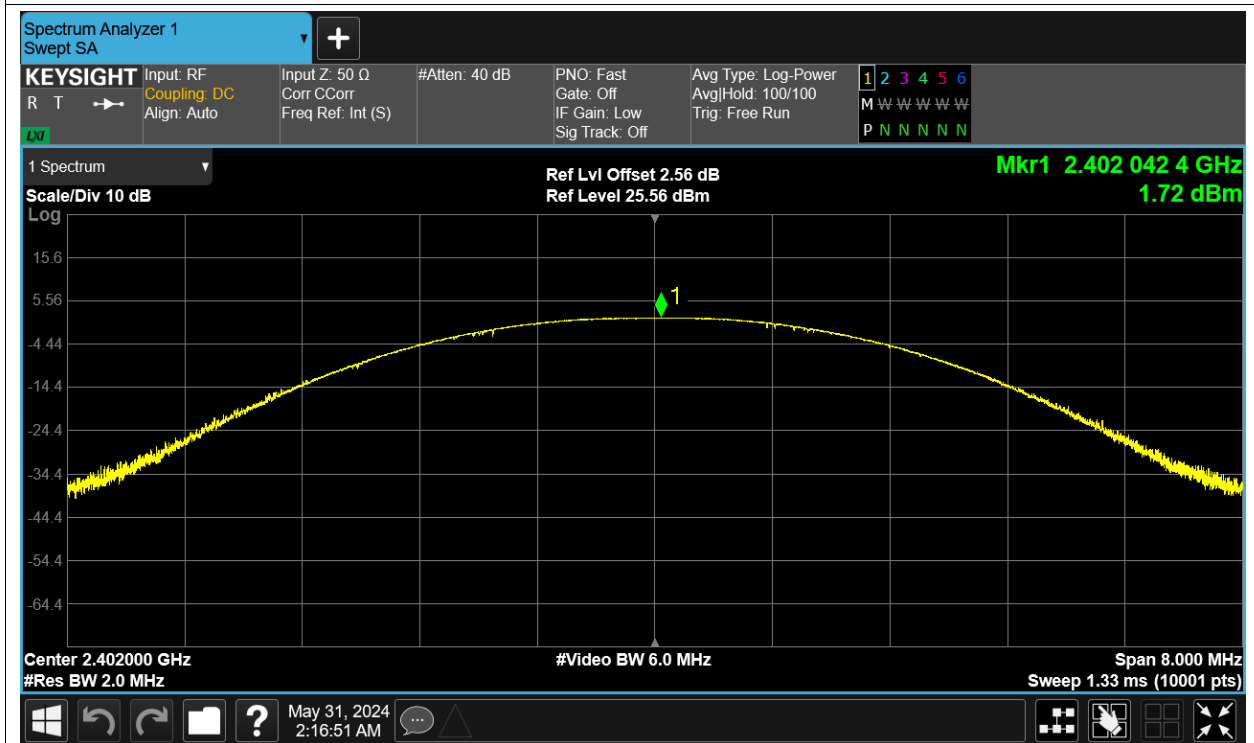


Power NVNT 2-DH1 2441MHz Ant1

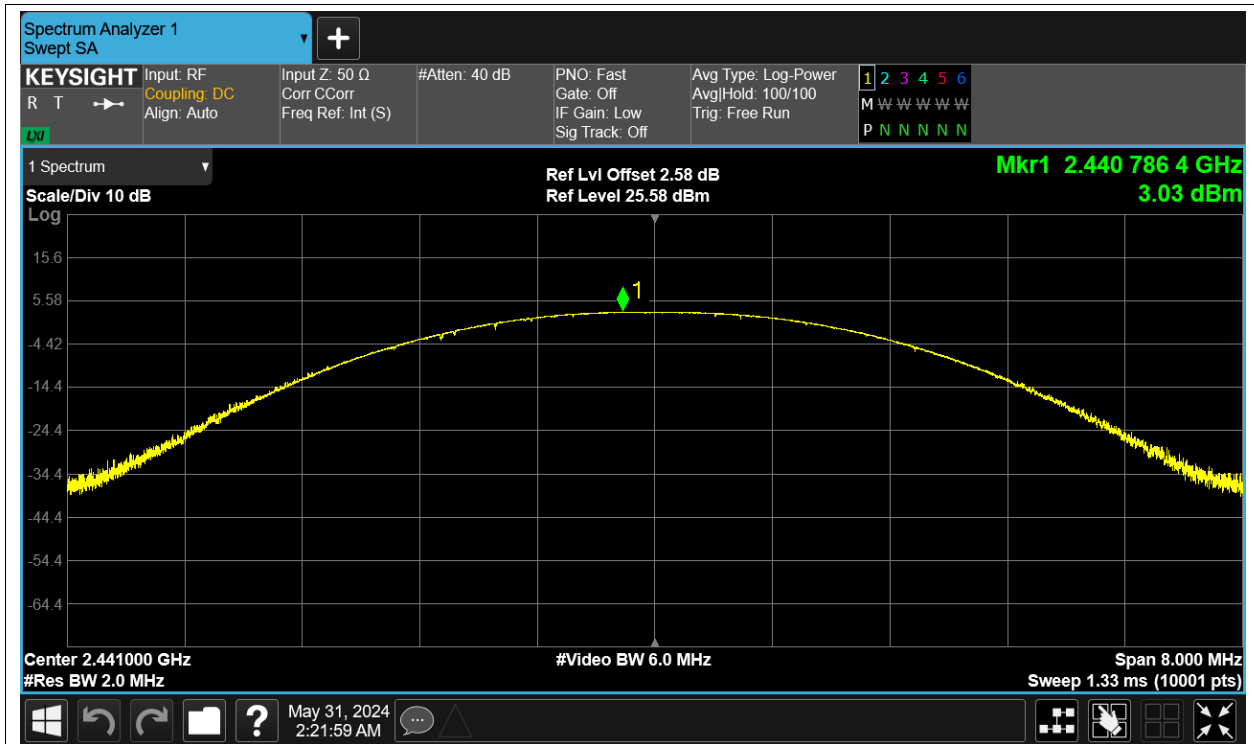


Power NVNT 2-DH1 2480MHz Ant1

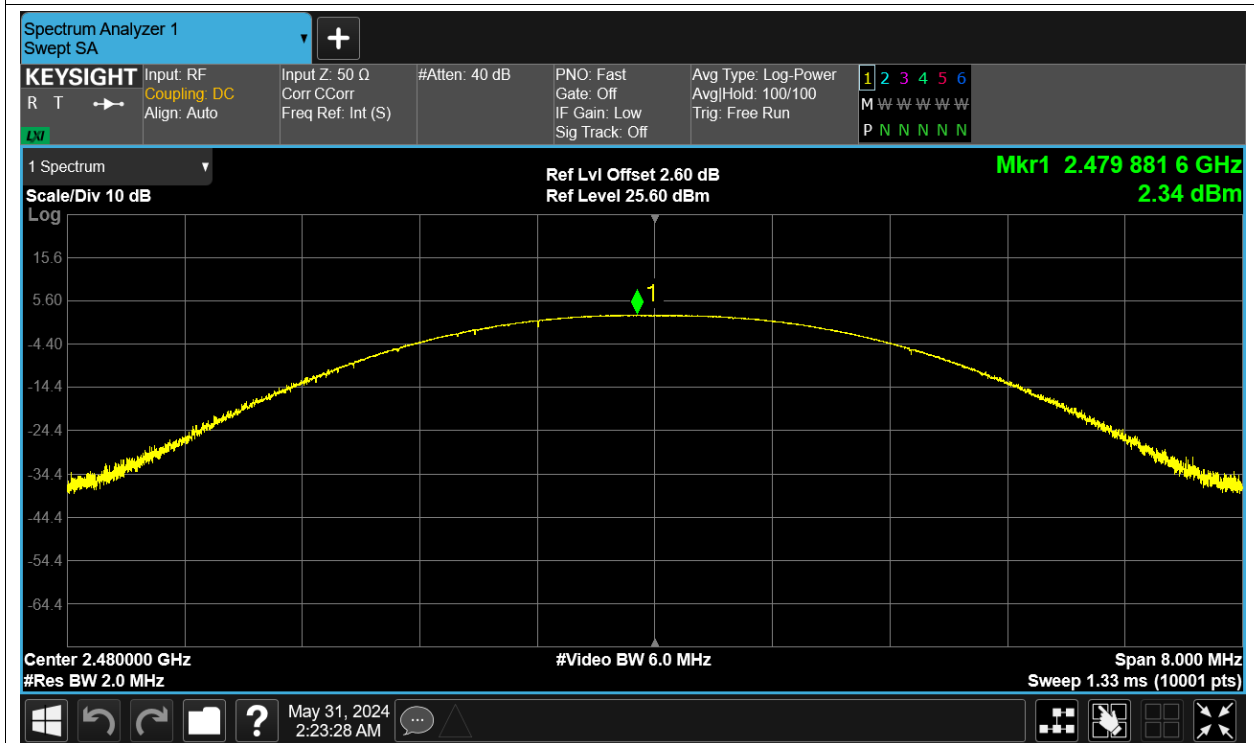


Power NVNT 3-DH1 2402MHz Ant1

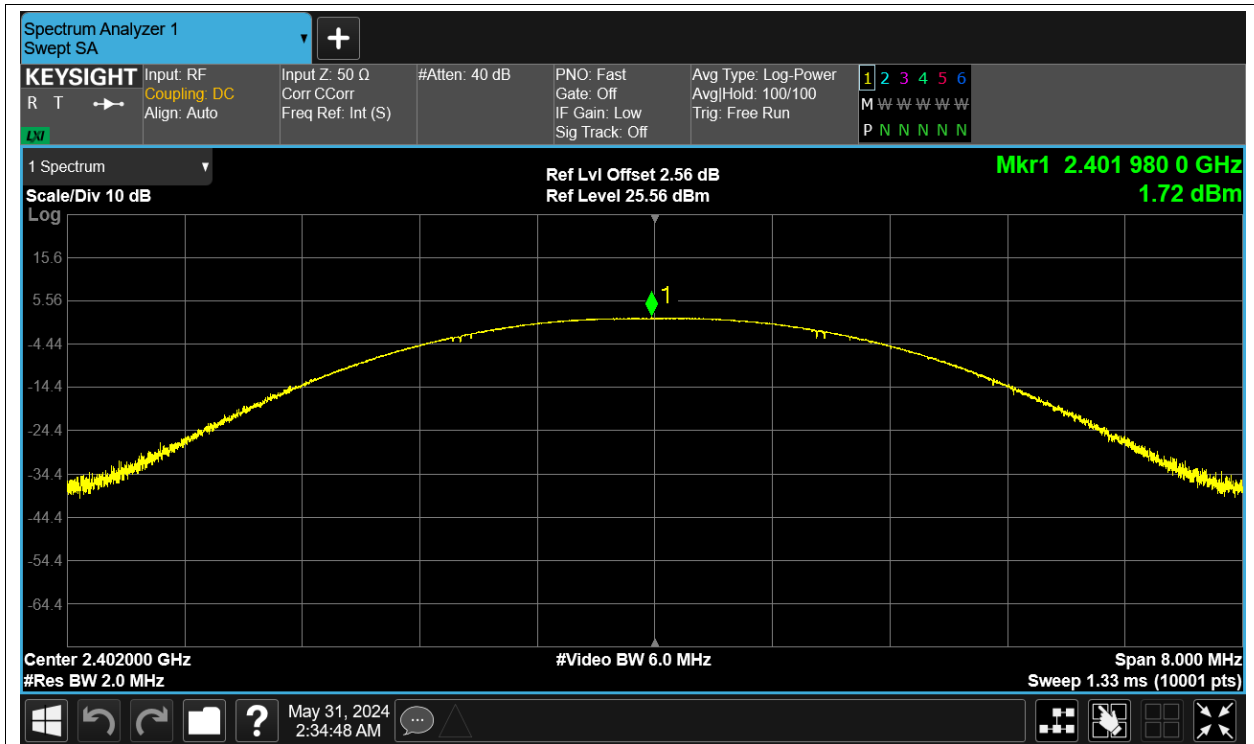

Power NVNT 3-DH1 2441MHz Ant1

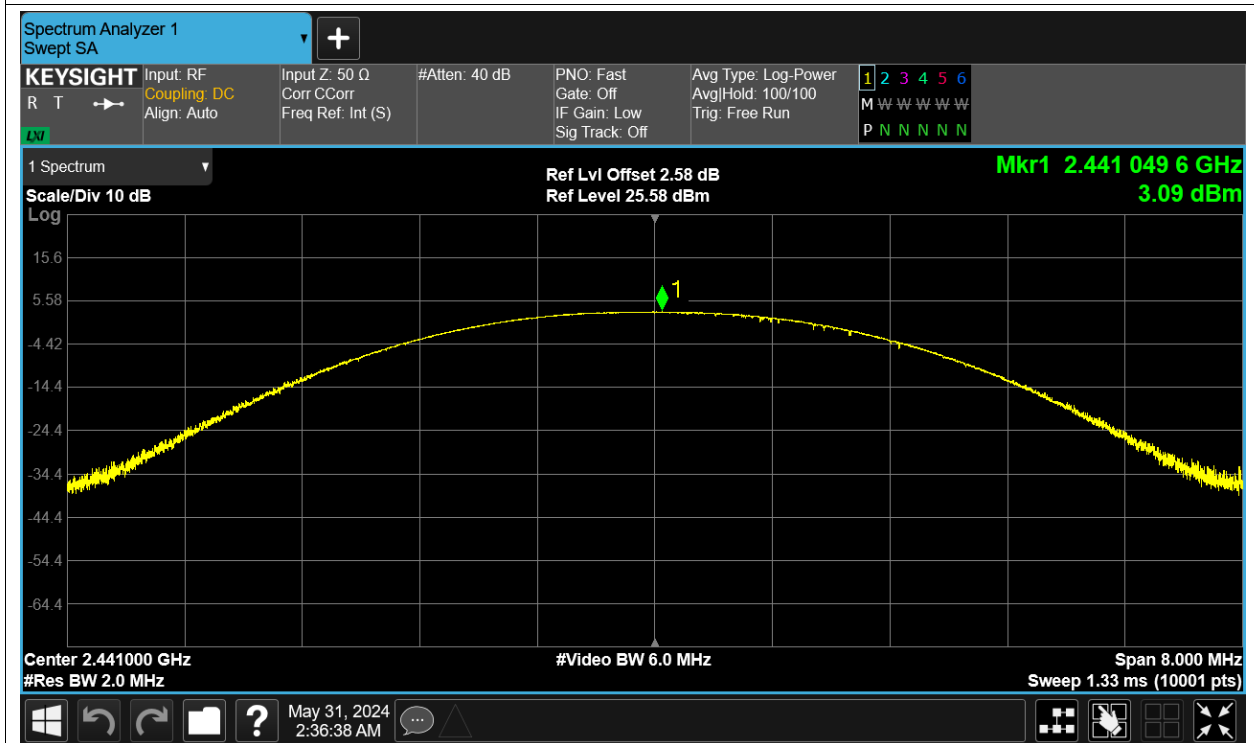

Power NVNT 3-DH1 2480MHz Ant1

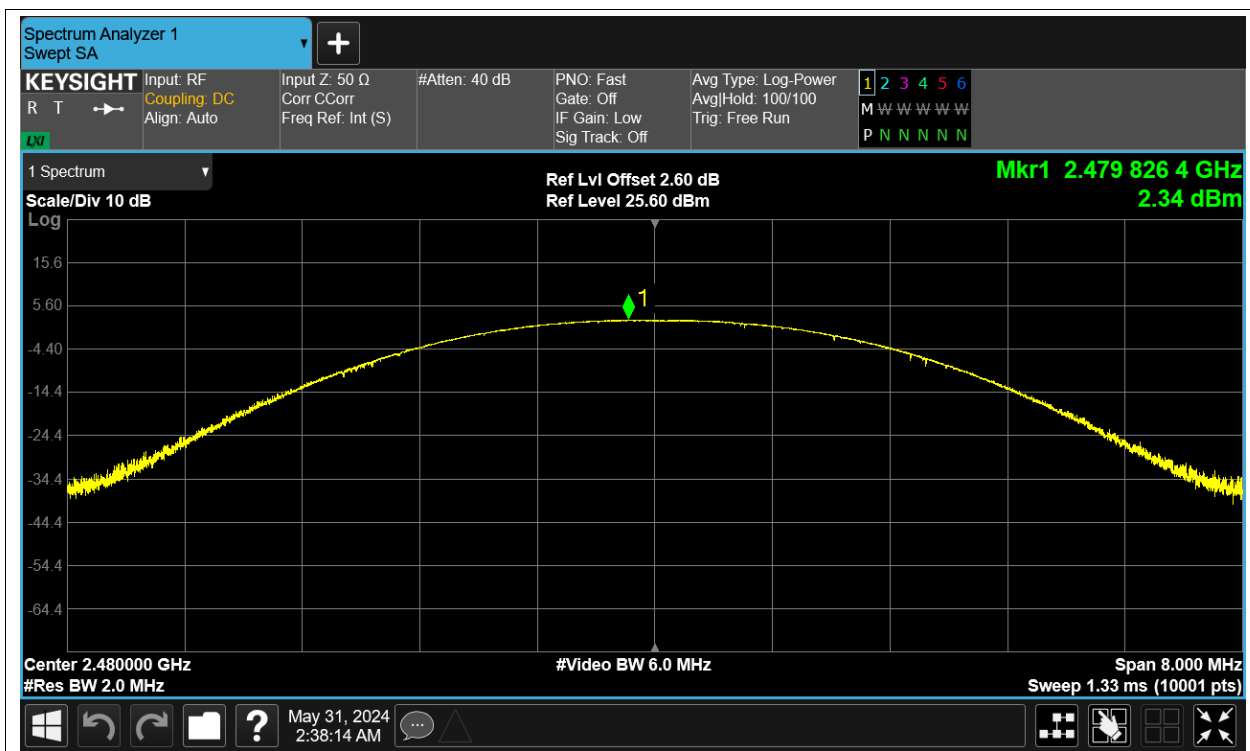


-20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)
NVNT	1-DH1	2402	Ant1	0.725
NVNT	1-DH1	2441	Ant1	0.788
NVNT	1-DH1	2480	Ant1	0.721
NVNT	2-DH1	2402	Ant1	1.171
NVNT	2-DH1	2441	Ant1	1.175
NVNT	2-DH1	2480	Ant1	1.168
NVNT	3-DH1	2402	Ant1	1.196
NVNT	3-DH1	2441	Ant1	1.198
NVNT	3-DH1	2480	Ant1	1.197







-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

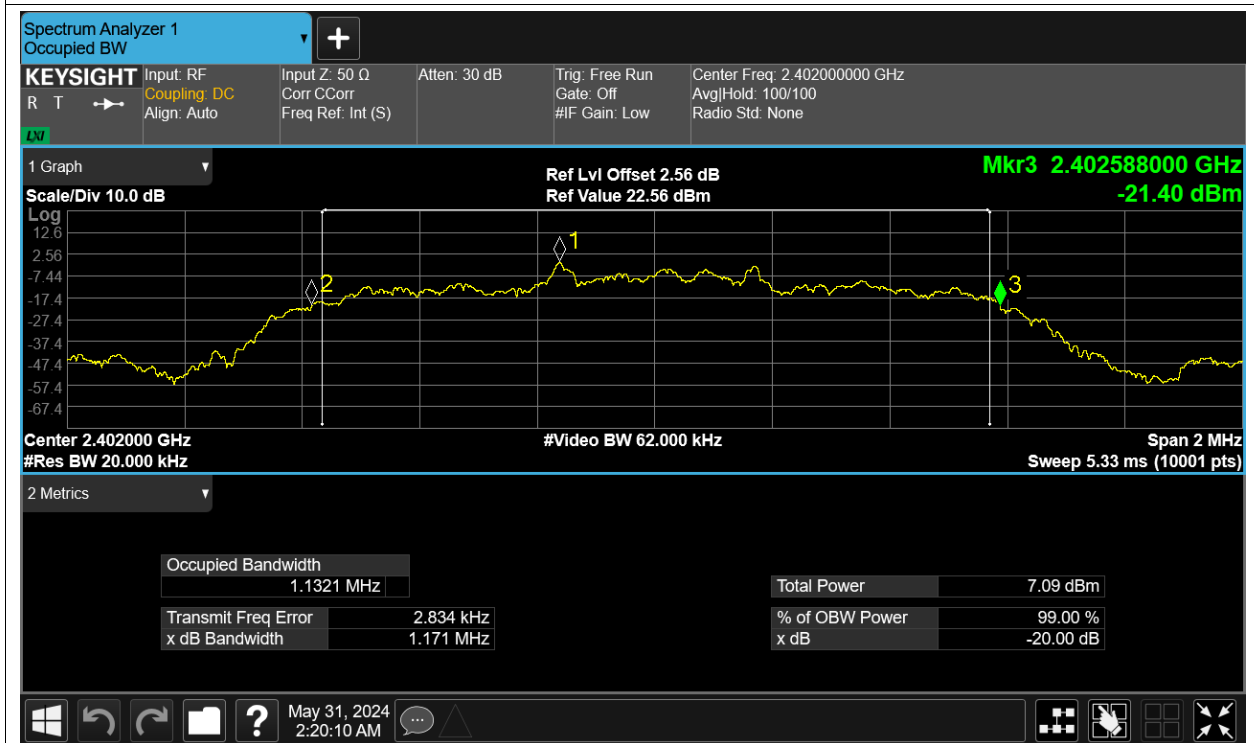


-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

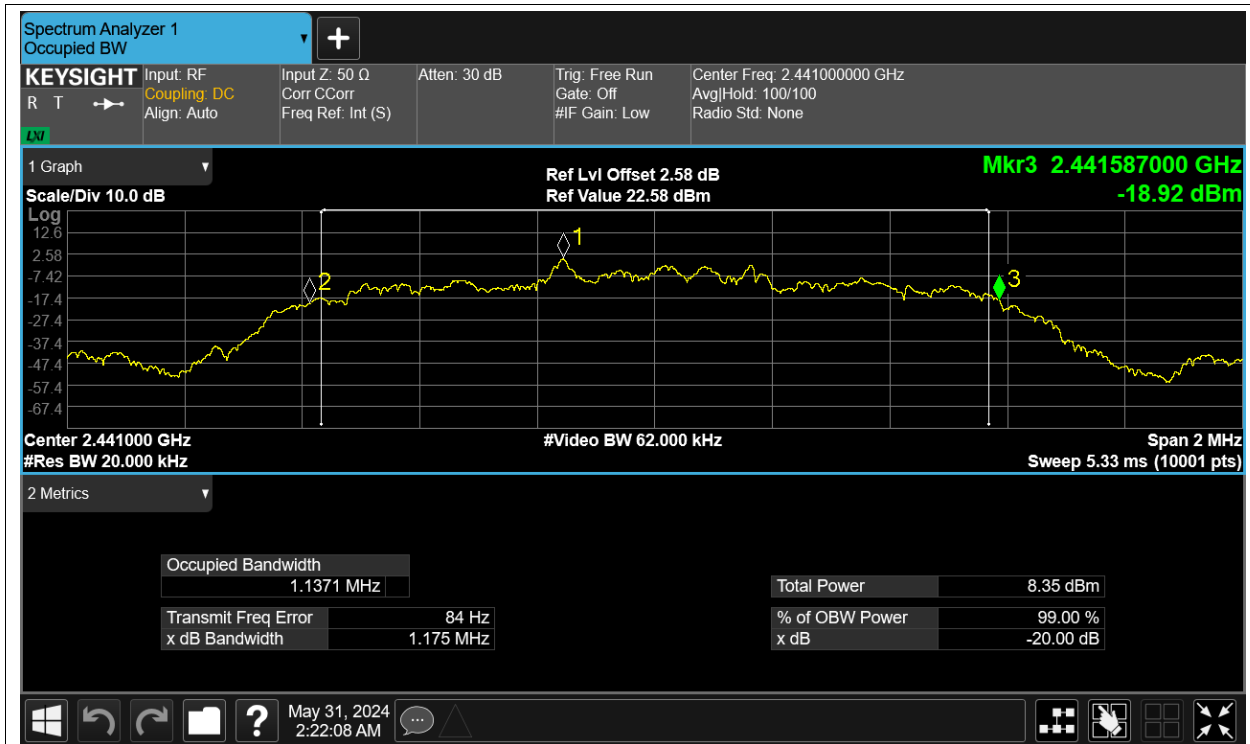


-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

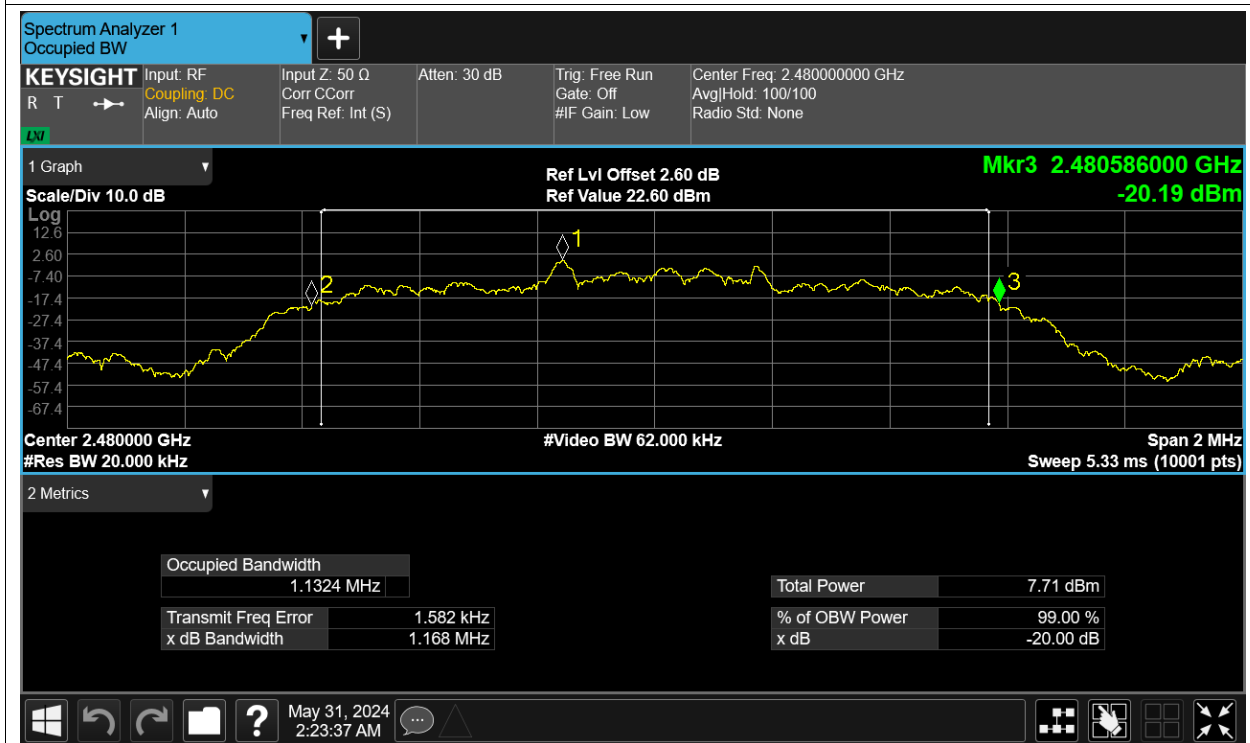


-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

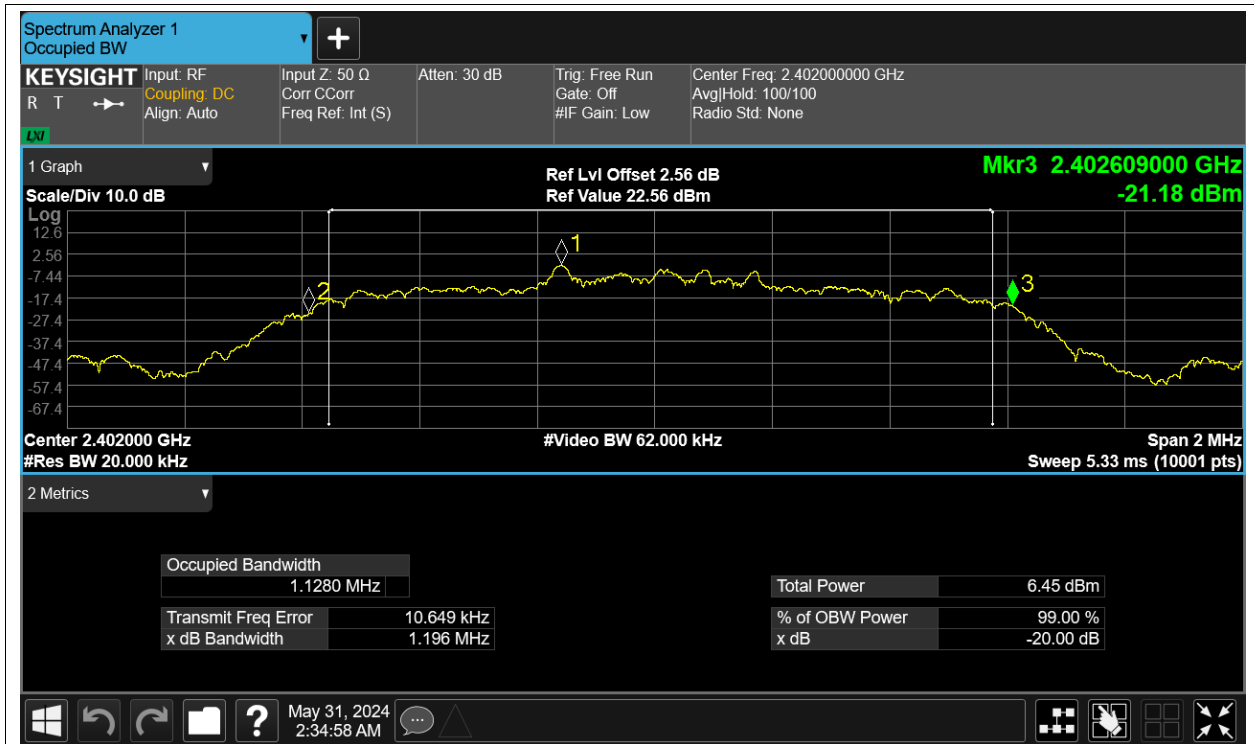

-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1

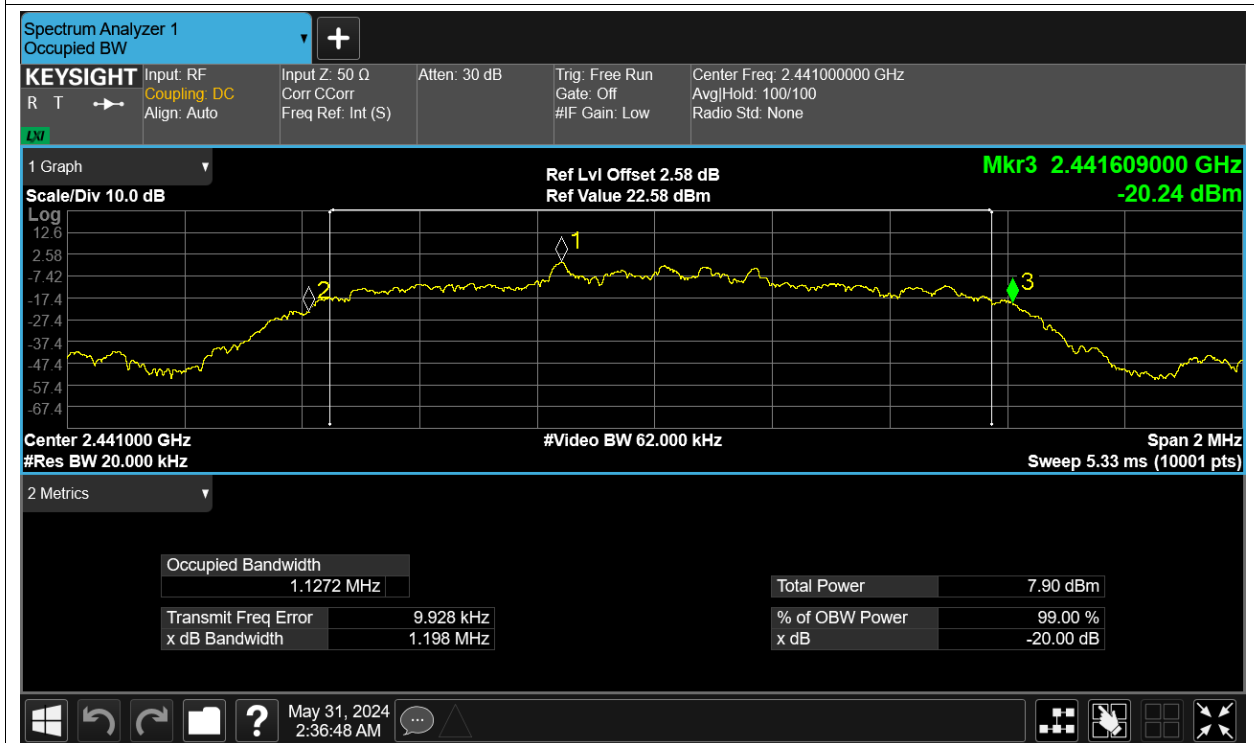

-20dB Bandwidth NVNT 3-DH1 2480MHz Ant1

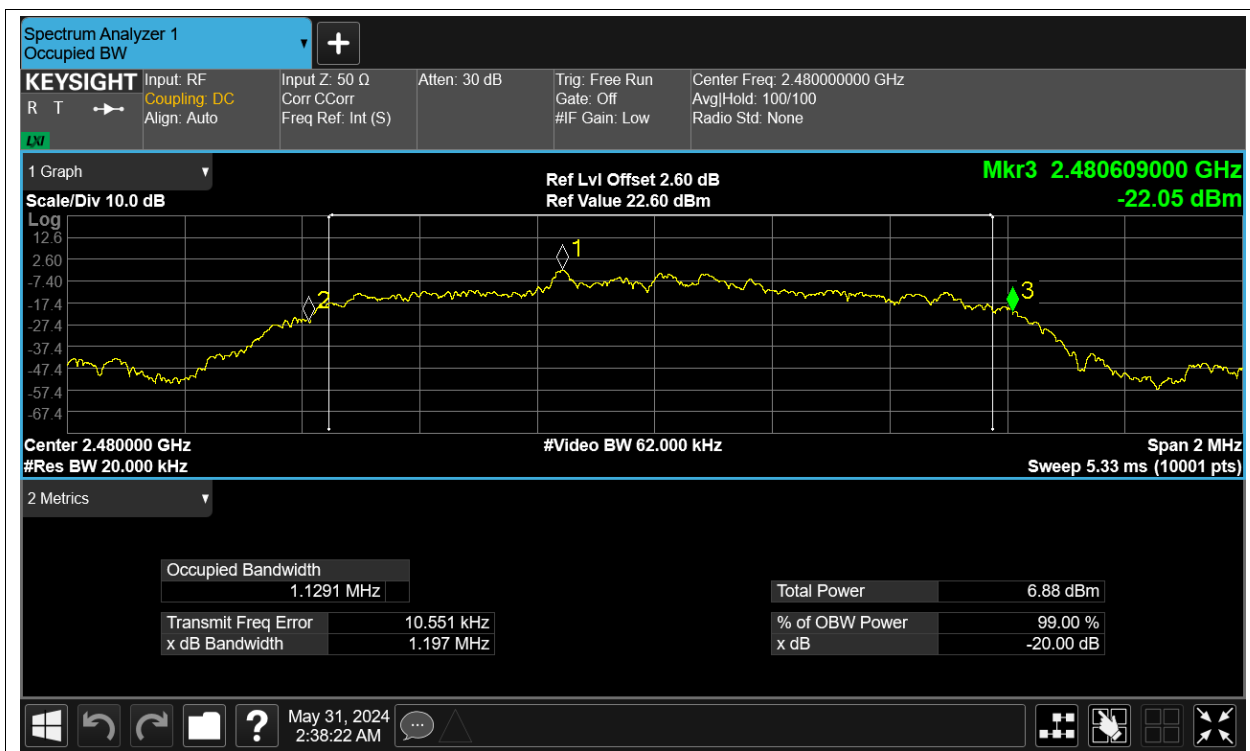


Carrier Frequencies Separation


Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	Ant1	2402.01	2403.008	0.998	0.725	Pass
NVNT	1-DH1	Ant1	2440.994	2441.996	1.002	0.788	Pass
NVNT	1-DH1	Ant1	2479.016	2480.02	1.004	0.721	Pass
NVNT	2-DH1	Ant1	2402.174	2403.172	0.998	0.781	Pass
NVNT	2-DH1	Ant1	2440.86	2441.832	0.972	0.783	Pass
NVNT	2-DH1	Ant1	2478.866	2480.16	1.294	0.779	Pass
NVNT	3-DH1	Ant1	2402.166	2403.174	1.008	0.797	Pass
NVNT	3-DH1	Ant1	2440.848	2441.832	0.984	0.799	Pass
NVNT	3-DH1	Ant1	2478.844	2479.842	0.998	0.798	Pass

Test Graphs


CFS NVNT 1-DH1 2402MHz Ant1

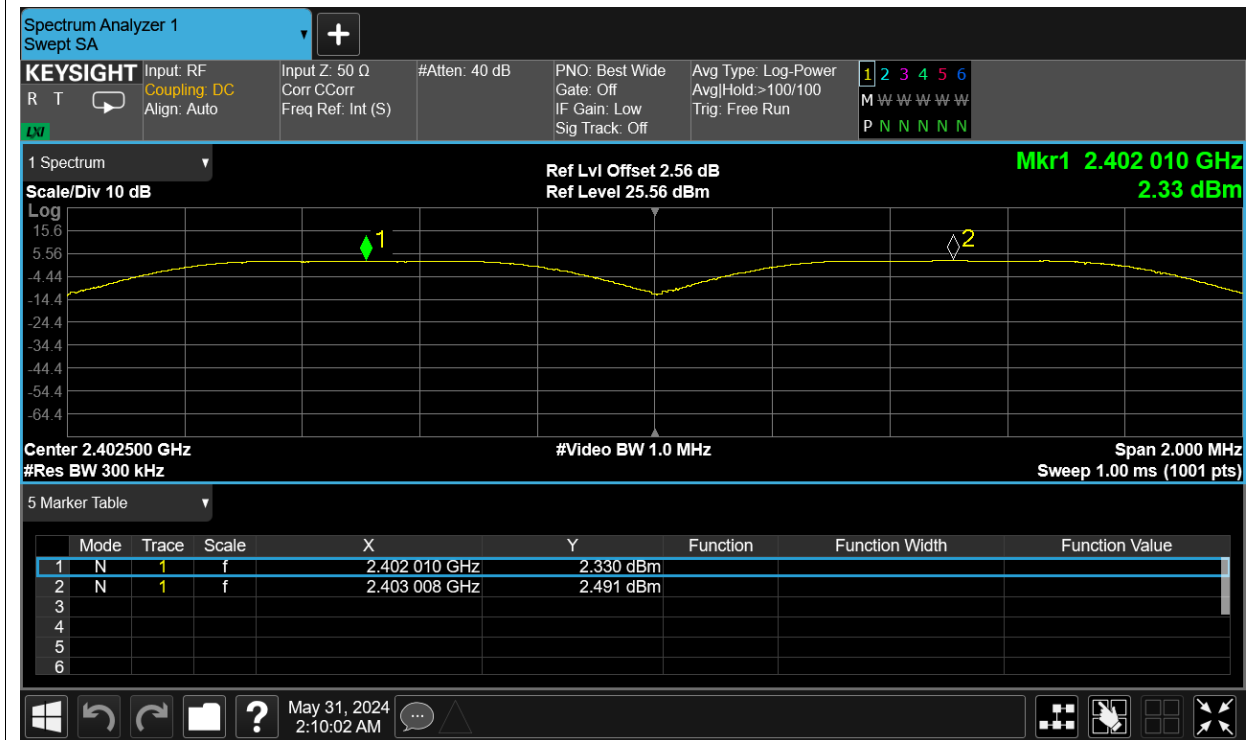


CFS NVNT 1-DH1 2441MHz Ant1

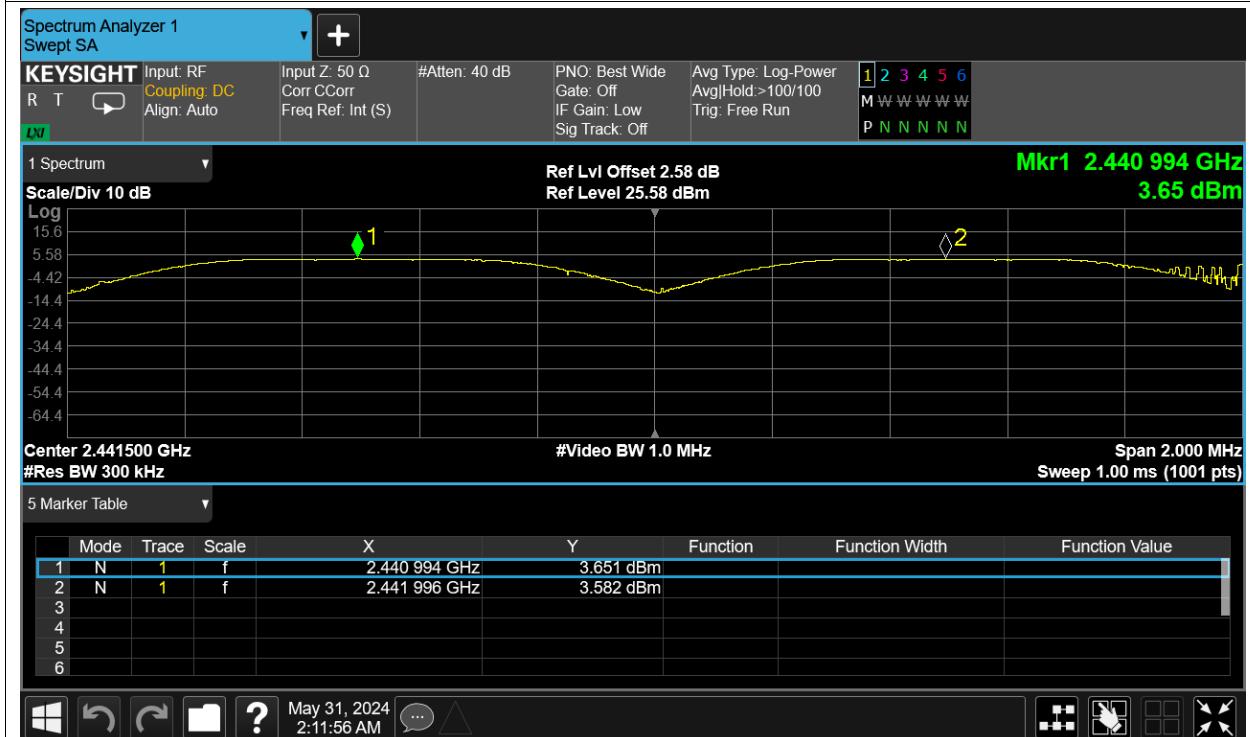


CFS NVNT 1-DH1 2480MHz Ant1

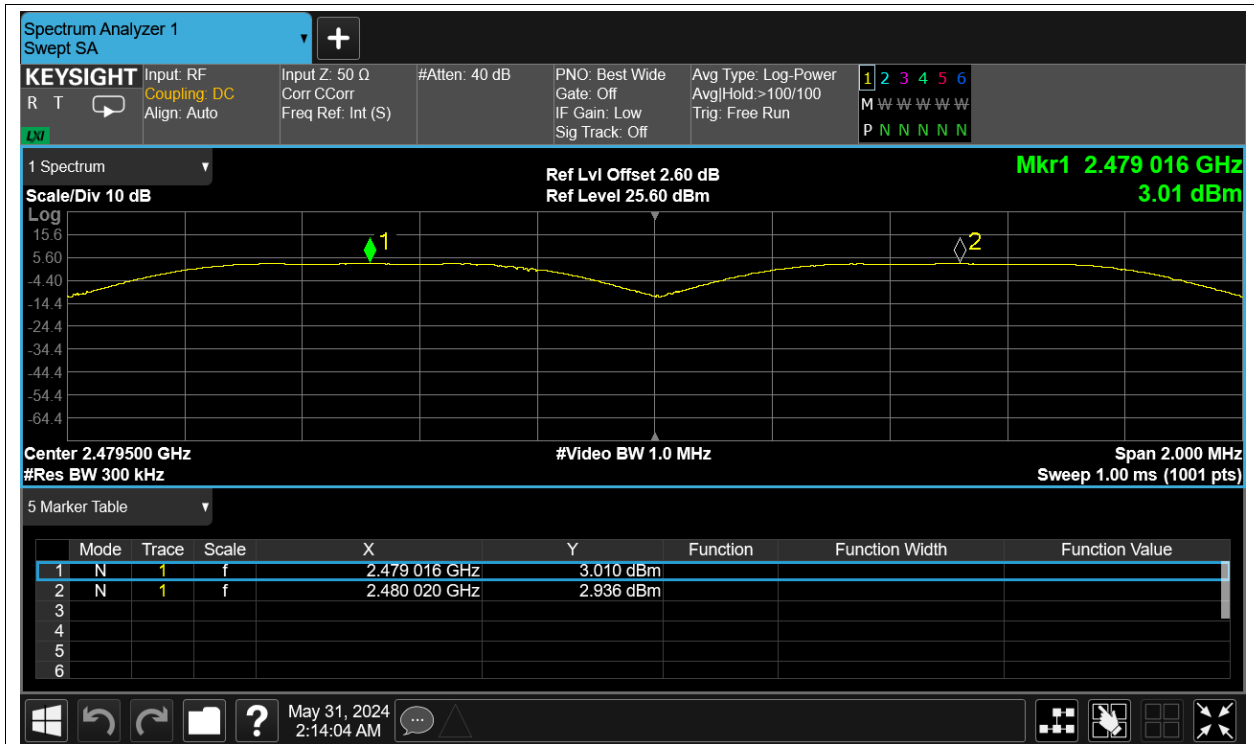


CFS NVNT 2-DH1 2402MHz Ant1

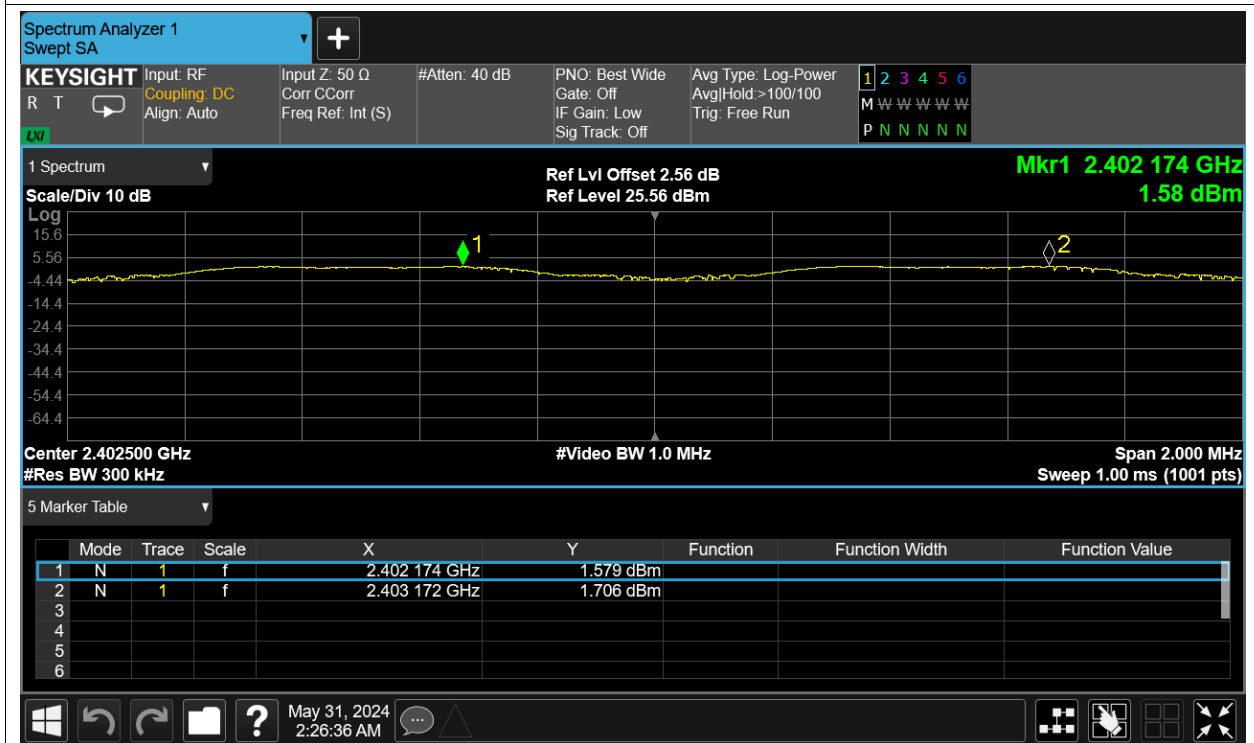


CFS NVNT 2-DH1 2441MHz Ant1

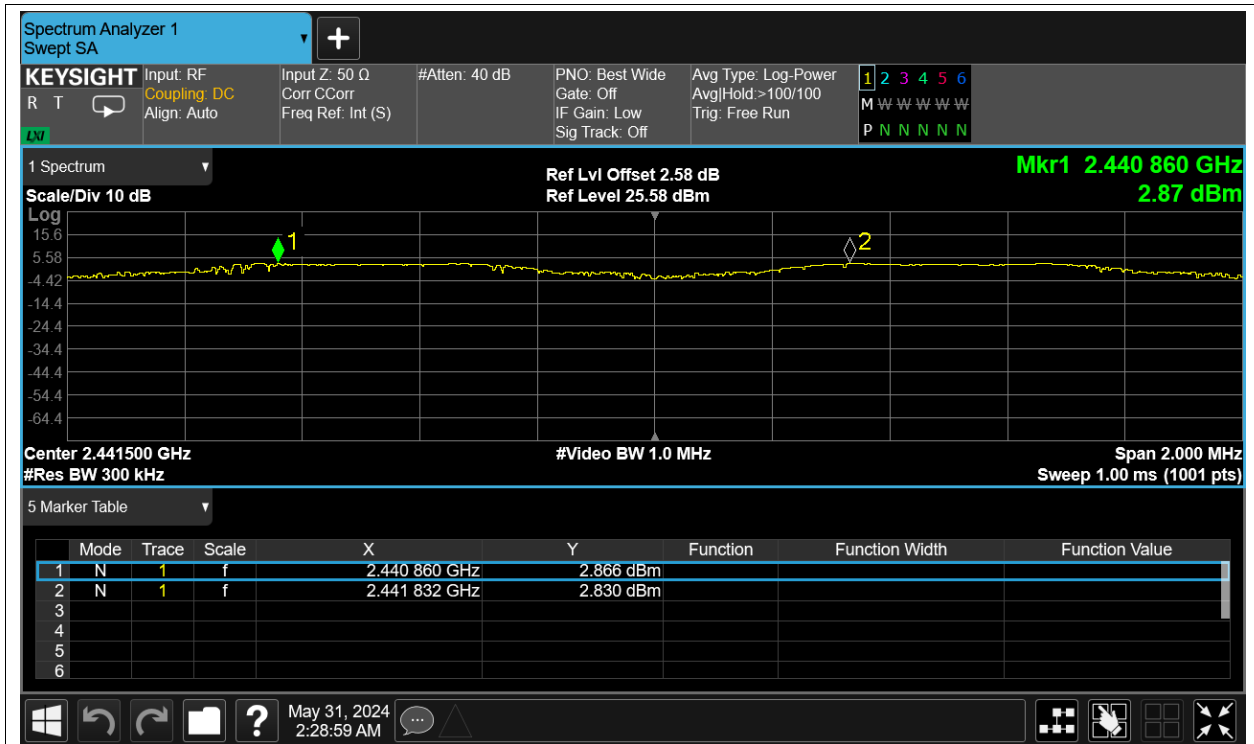


CFS NVNT 2-DH1 2480MHz Ant1

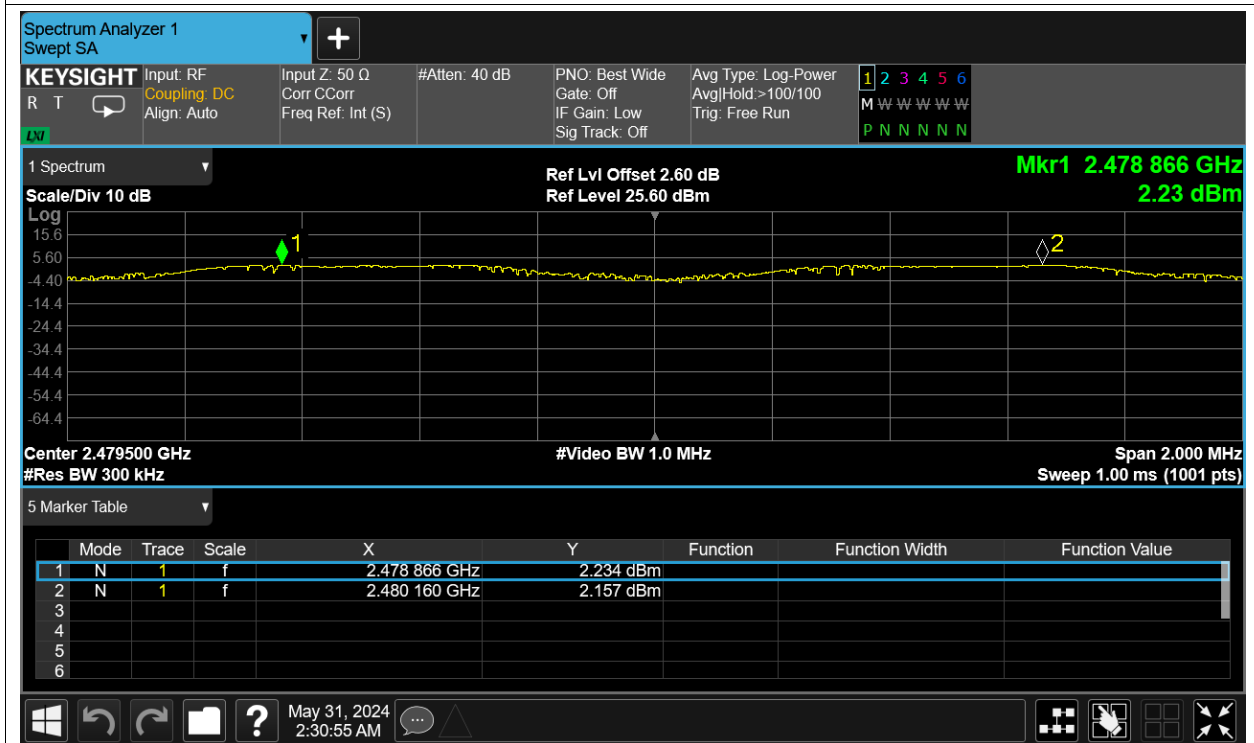


CFS NVNT 3-DH1 2402MHz Ant1

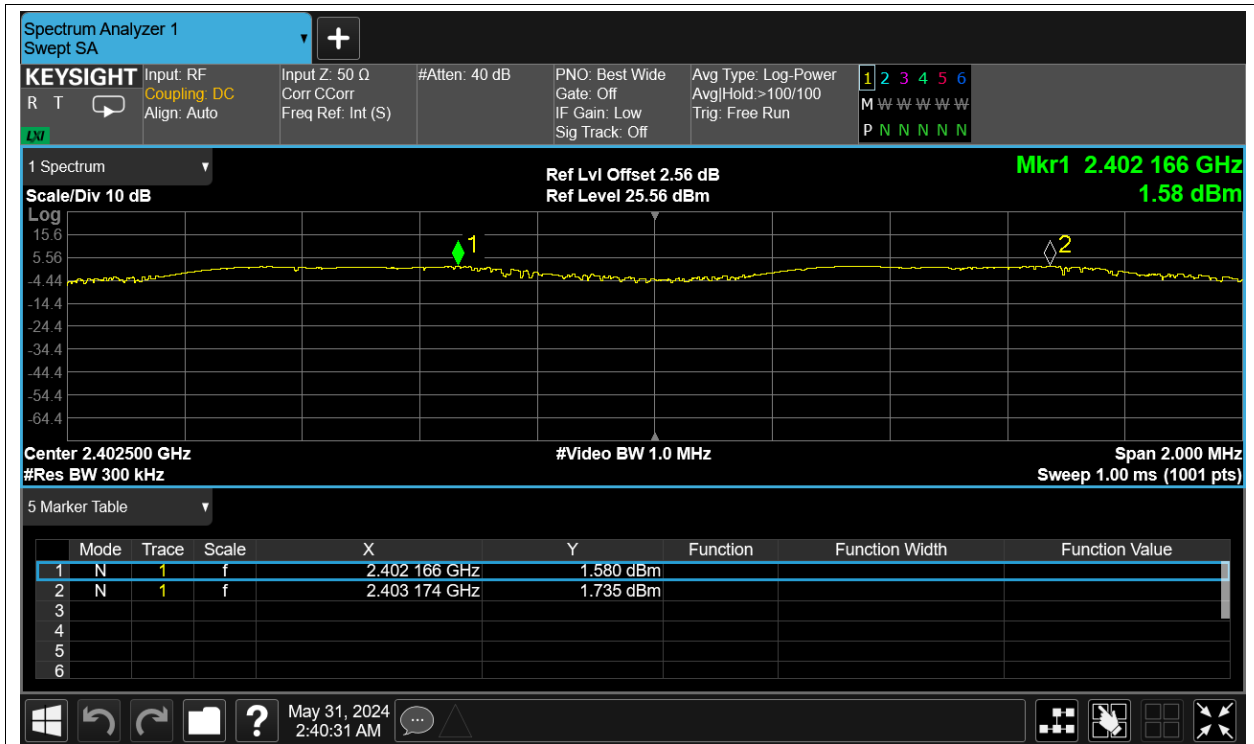

CFS NVNT 3-DH1 2441MHz Ant1

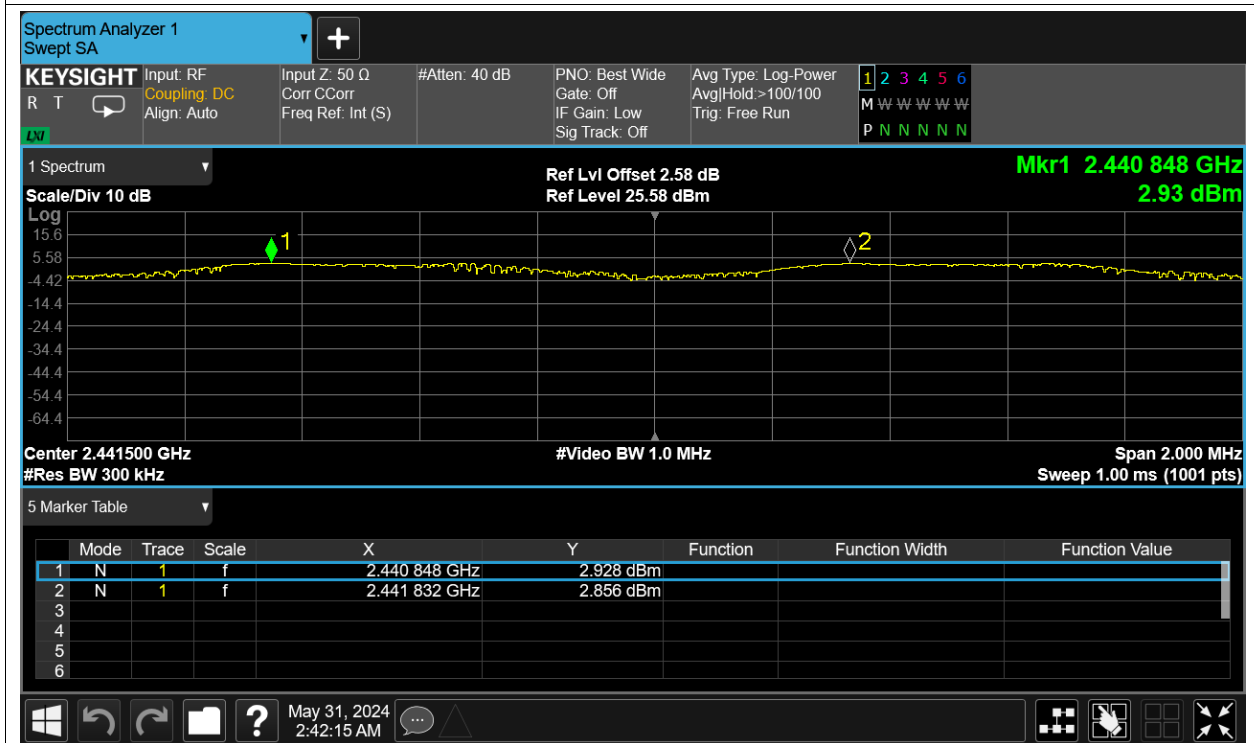

CFS NVNT 3-DH1 2480MHz Ant1

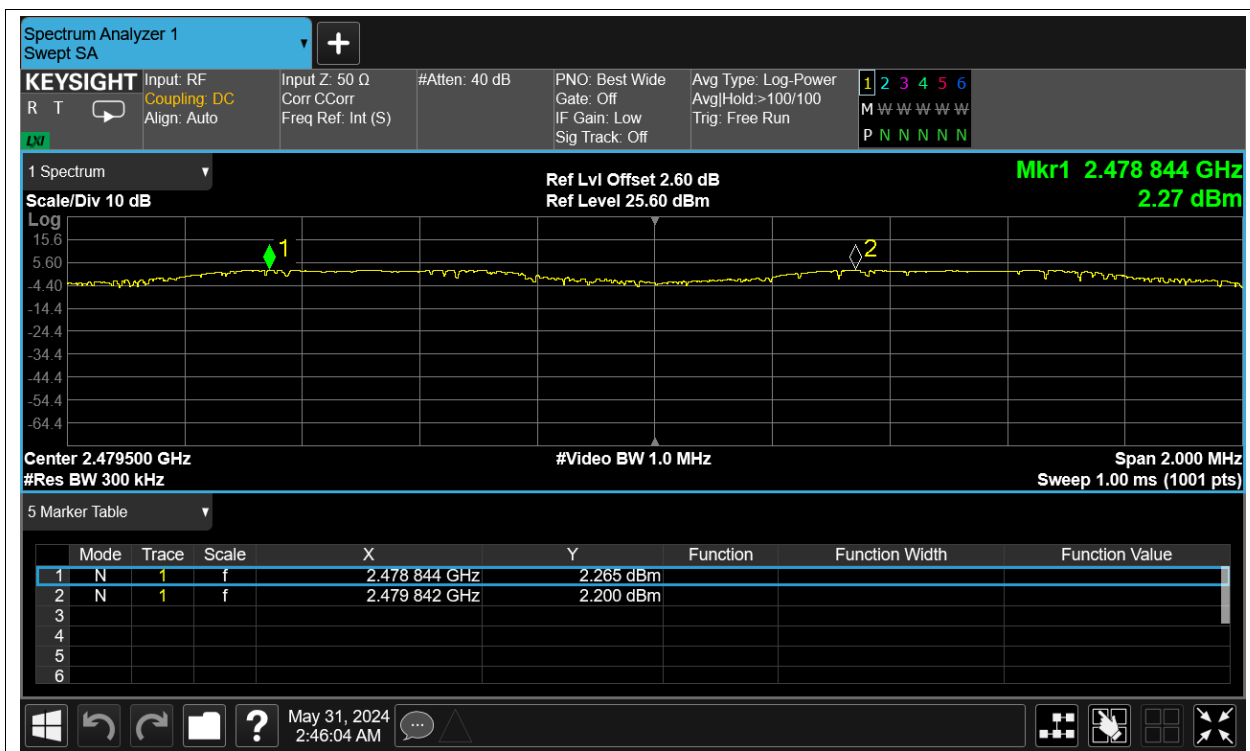


Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	No-Hopping	-58.65	-20	Pass
NVNT	1-DH1	2480	Ant1	No-Hopping	-57.82	-20	Pass
NVNT	2-DH1	2402	Ant1	No-Hopping	-57.92	-20	Pass
NVNT	2-DH1	2480	Ant1	No-Hopping	-58.88	-20	Pass
NVNT	3-DH1	2402	Ant1	No-Hopping	-57.8	-20	Pass
NVNT	3-DH1	2480	Ant1	No-Hopping	-57.73	-20	Pass

Test Graphs


Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Ref

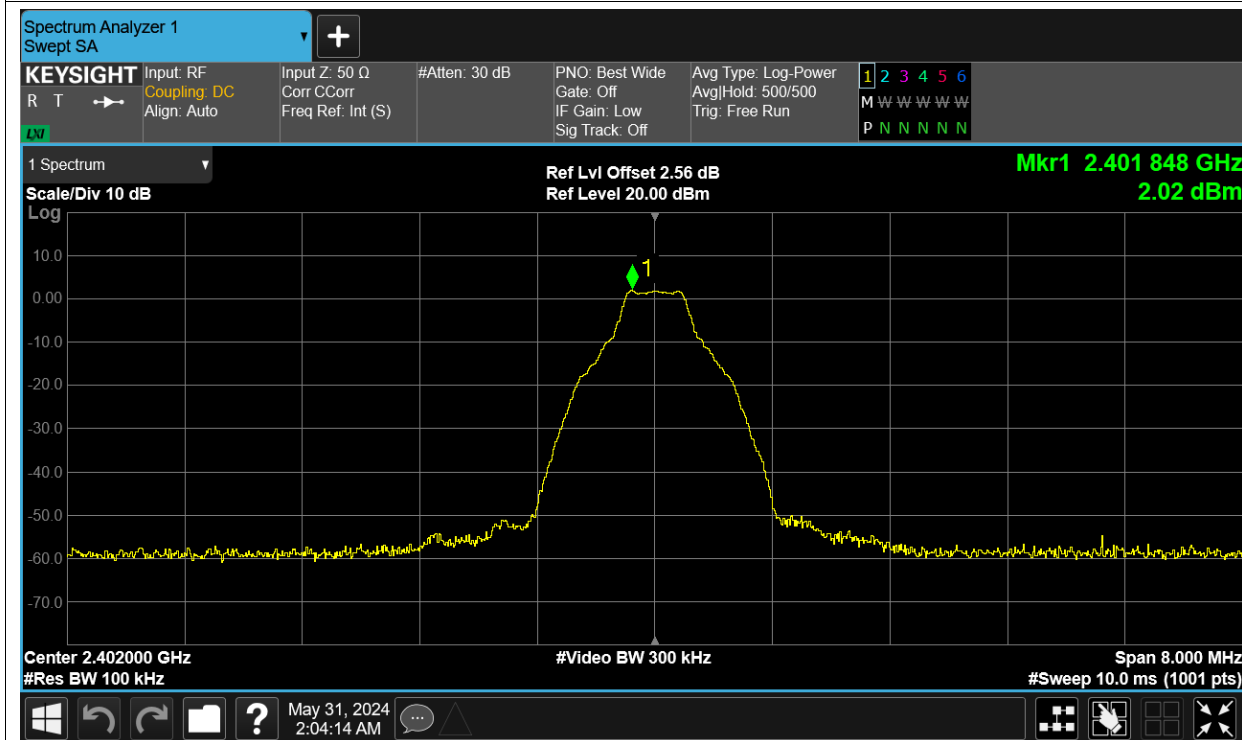


Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Emission

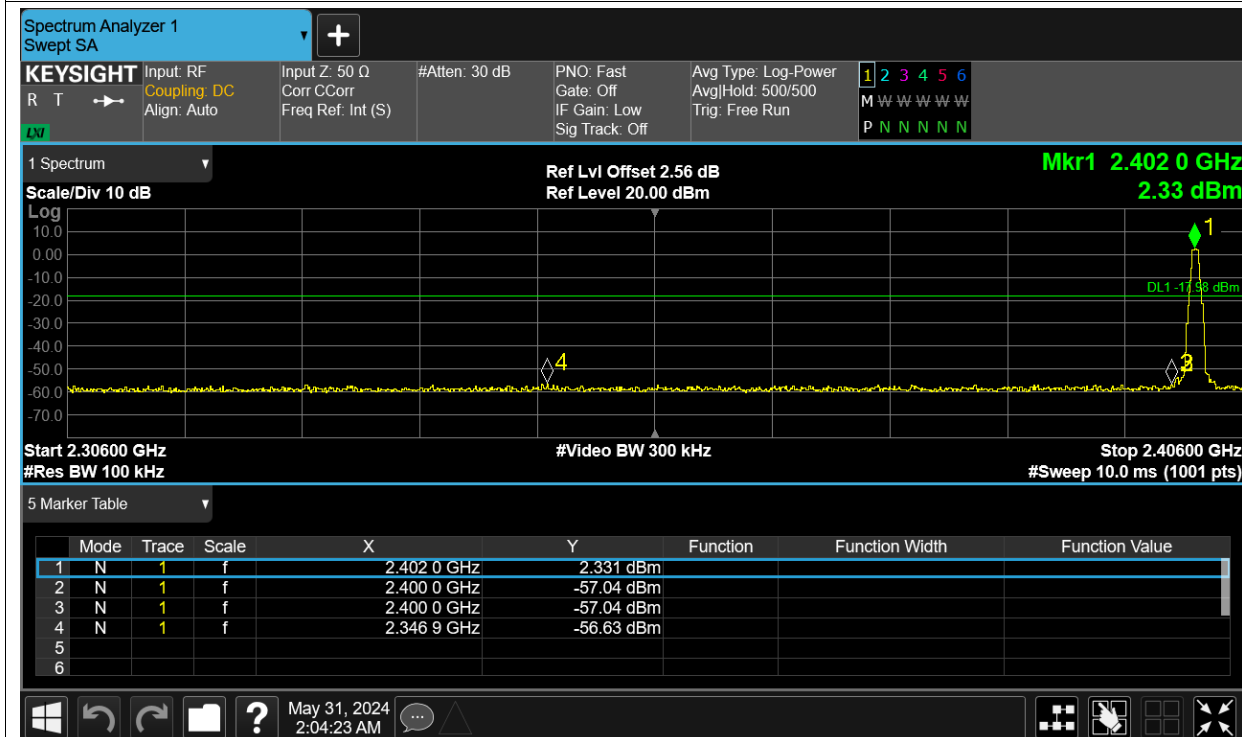


Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Ref

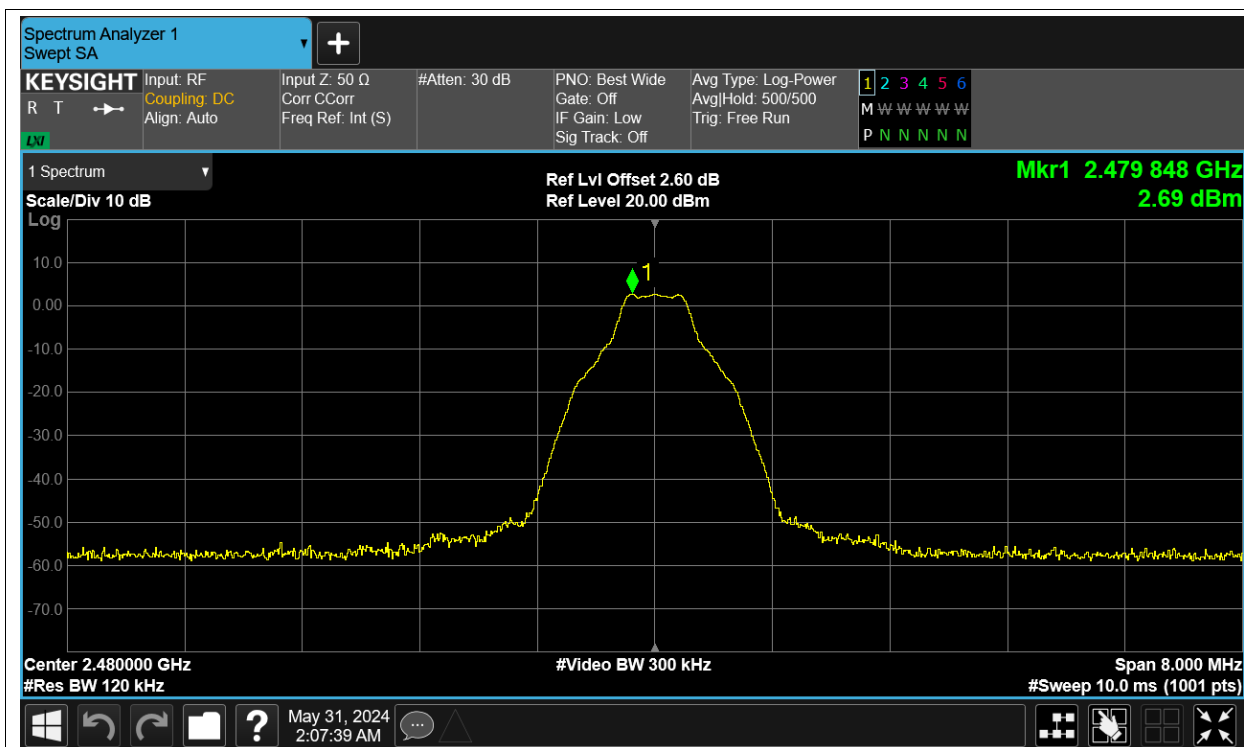


Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Emission

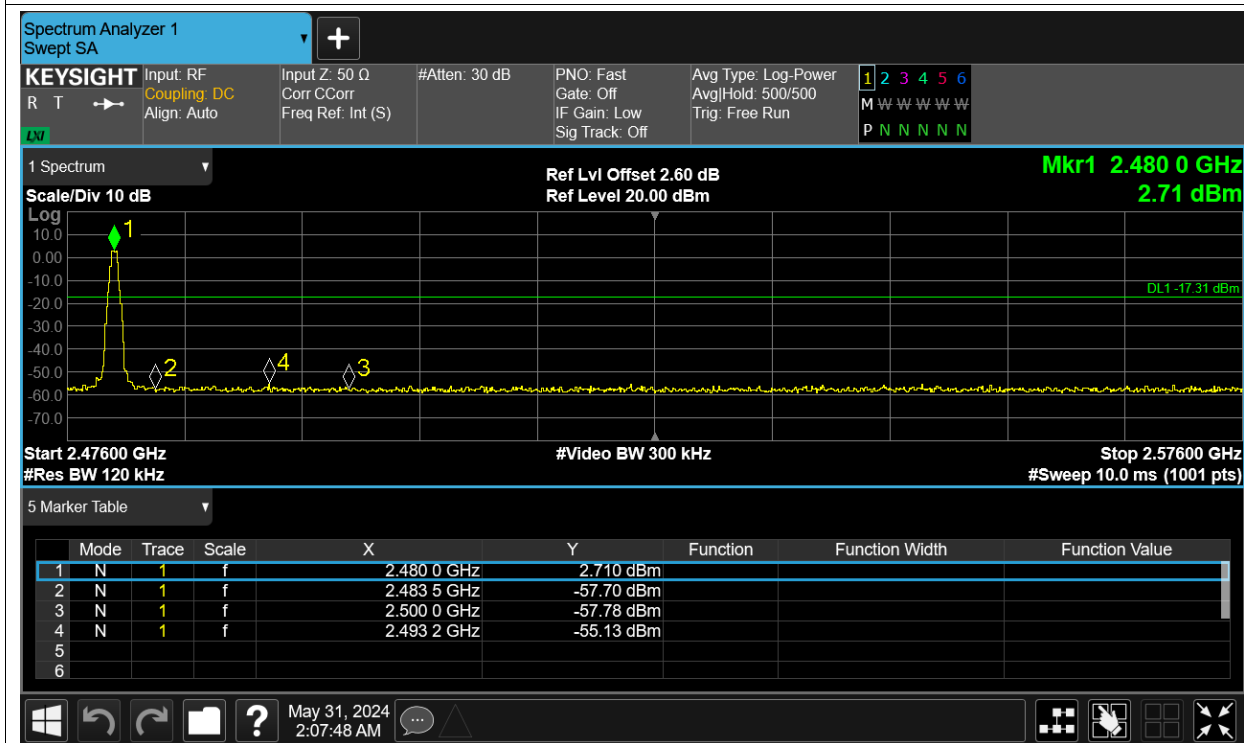


Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Ref

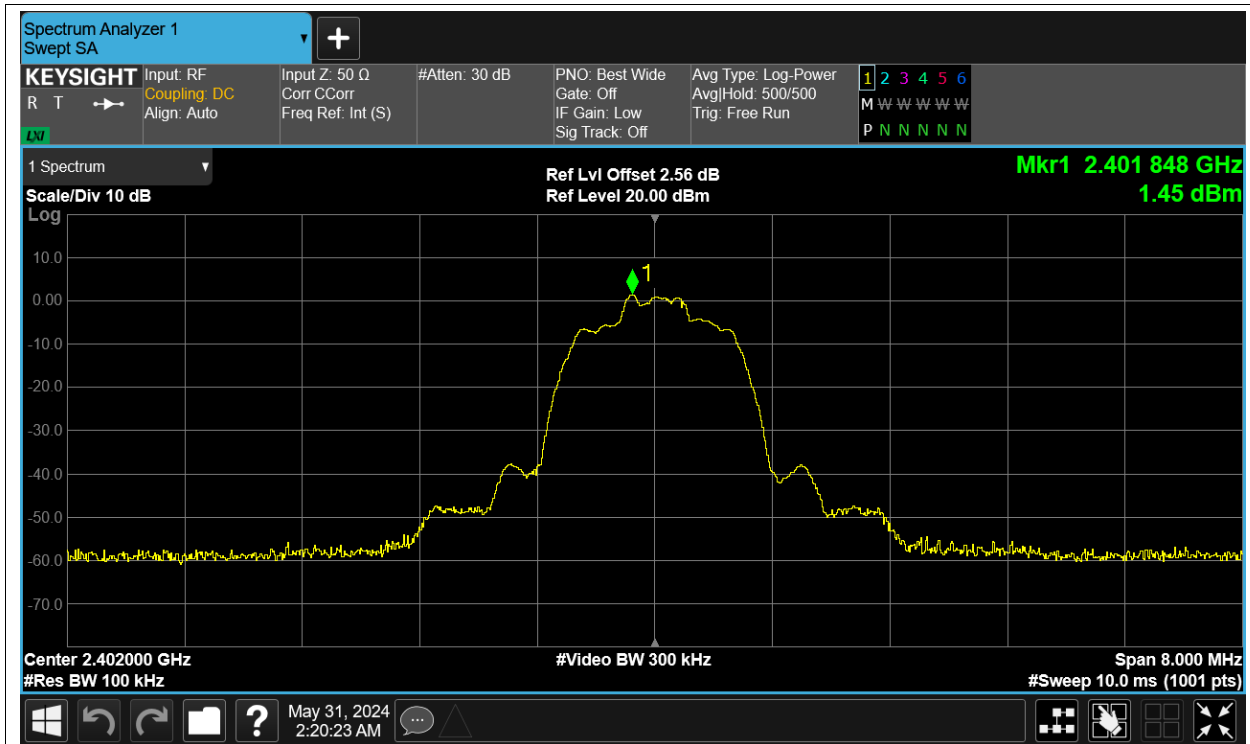


Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Emission

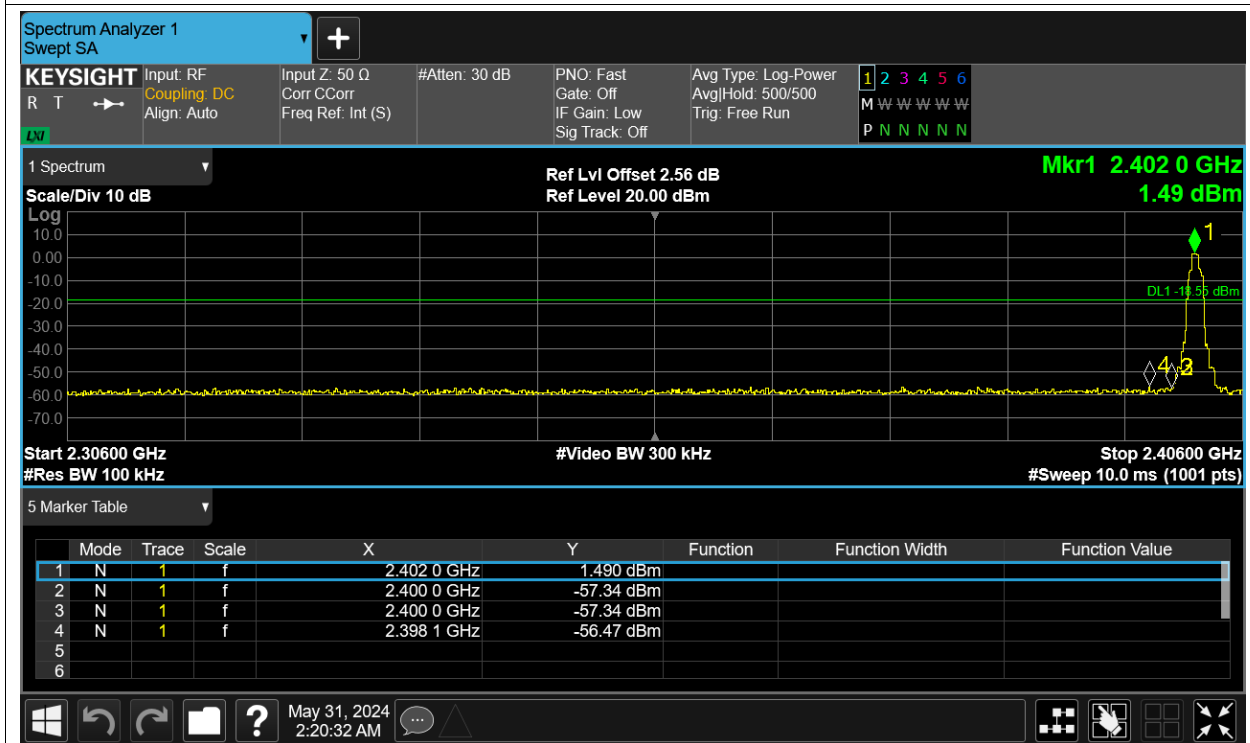


Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Ref

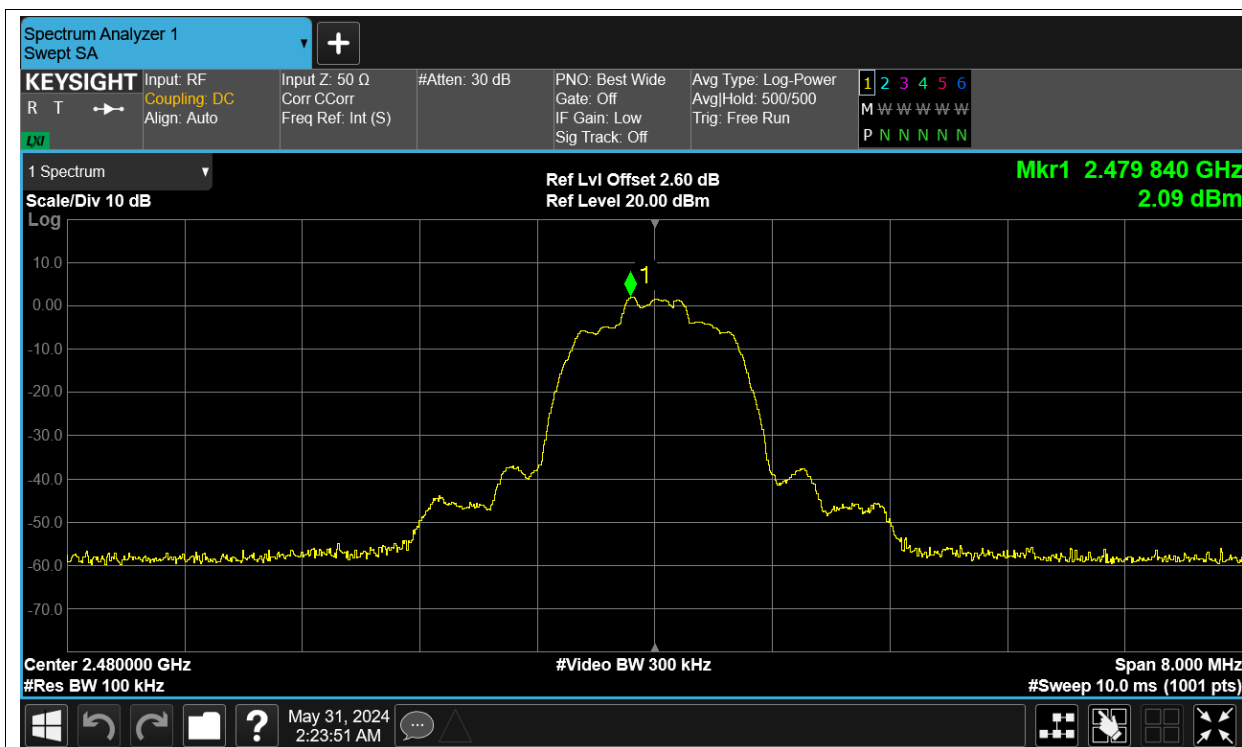


Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Emission

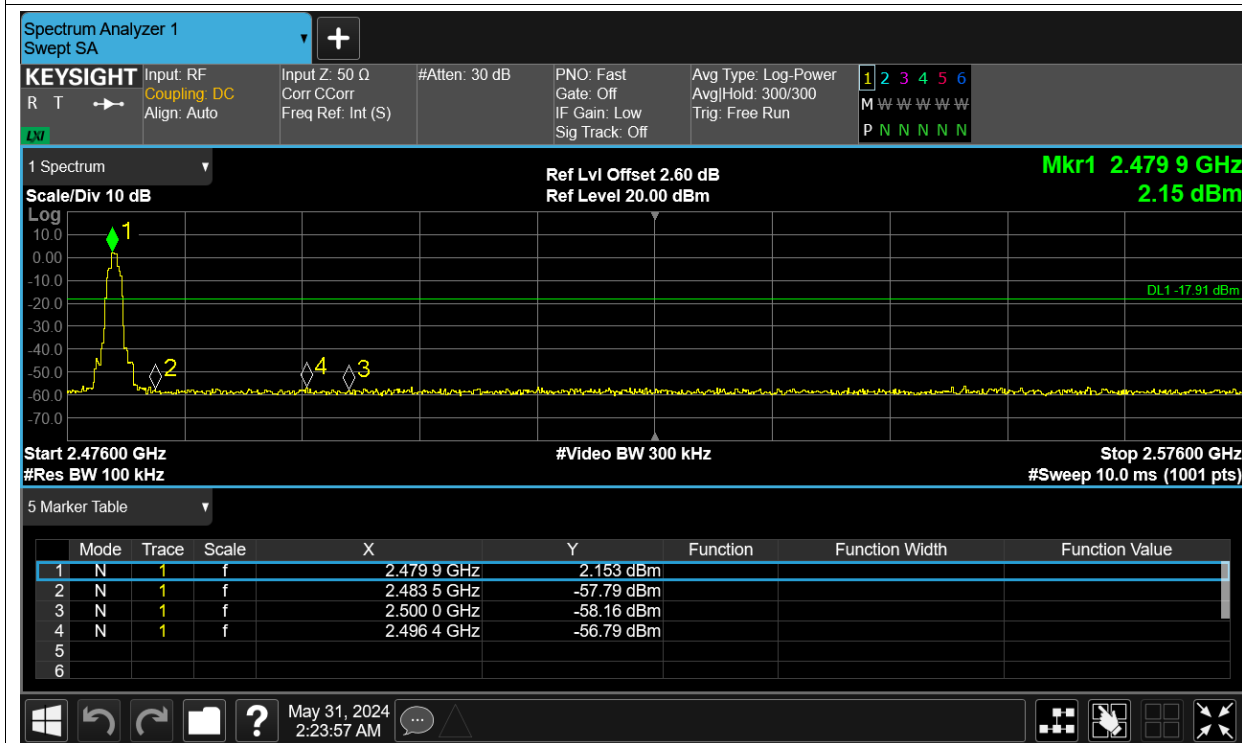


Band Edge NVNT 3-DH1 2402MHz Ant1 No-Hopping Ref

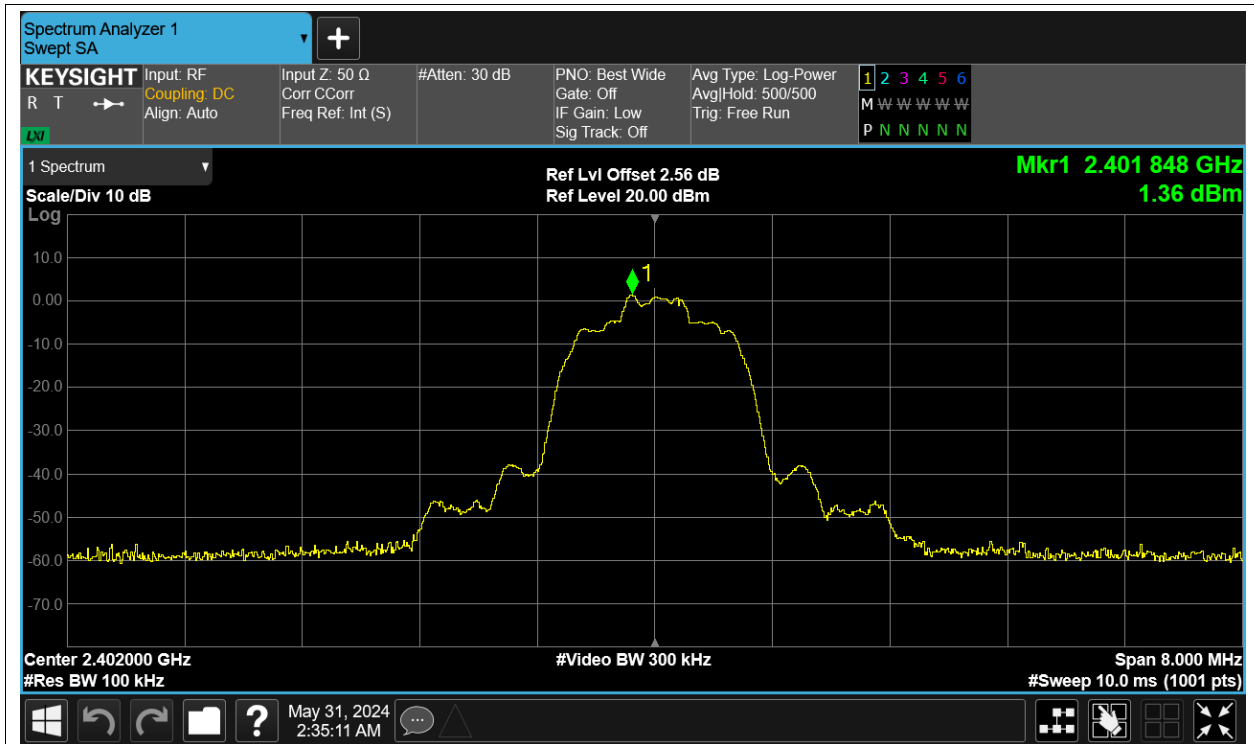


Band Edge NVNT 3-DH1 2402MHz Ant1 No-Hopping Emission

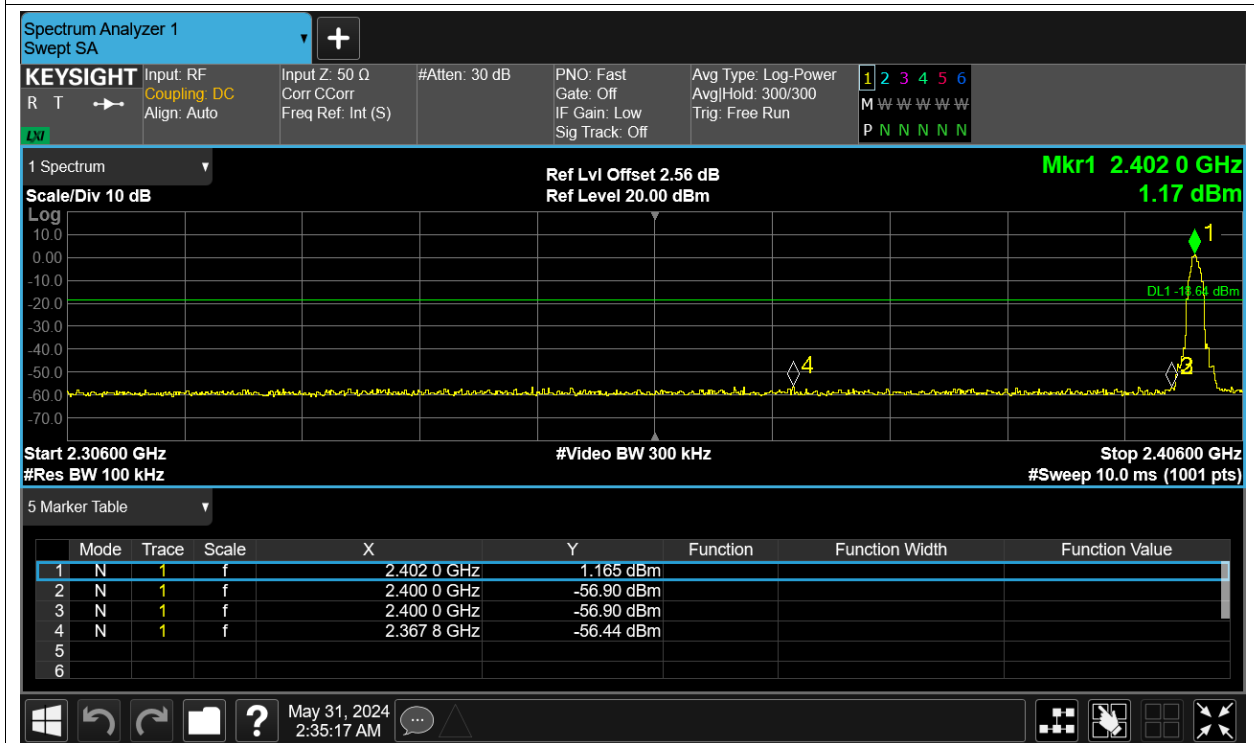

Band Edge NVNT 3-DH1 2480MHz Ant1 No-Hopping Ref

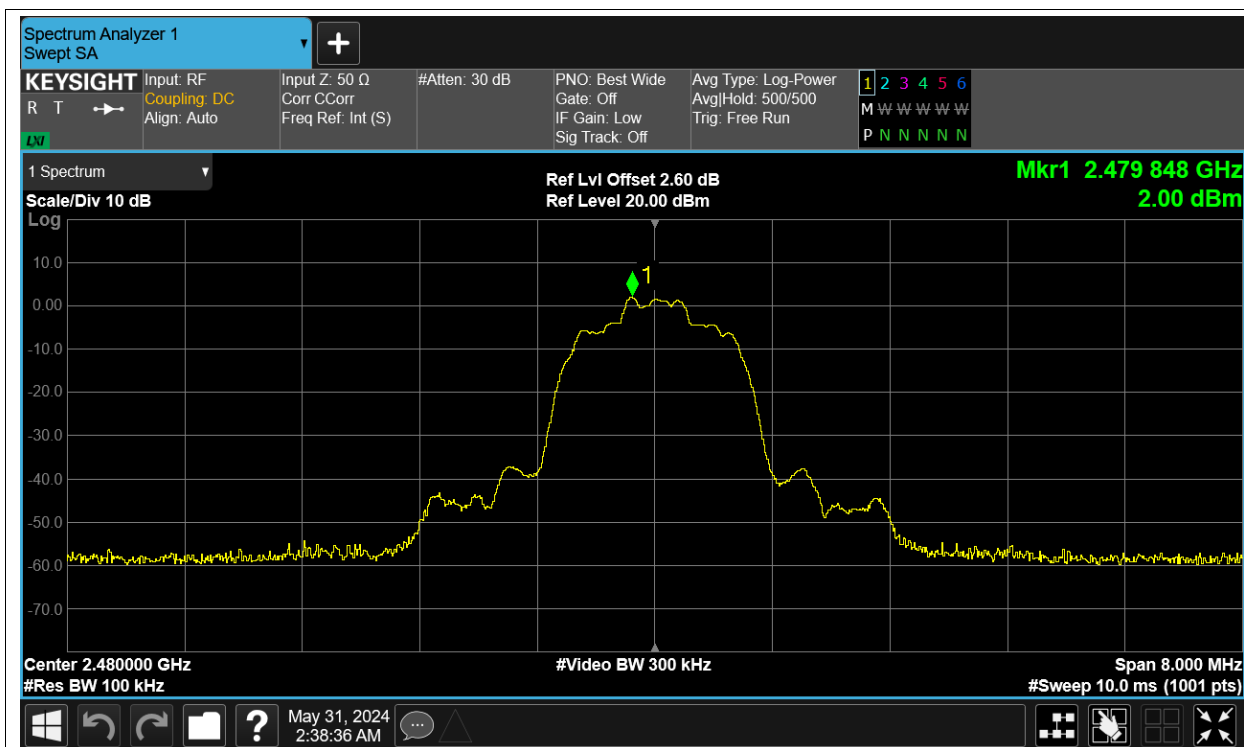

Band Edge NVNT 3-DH1 2480MHz Ant1 No-Hopping Emission

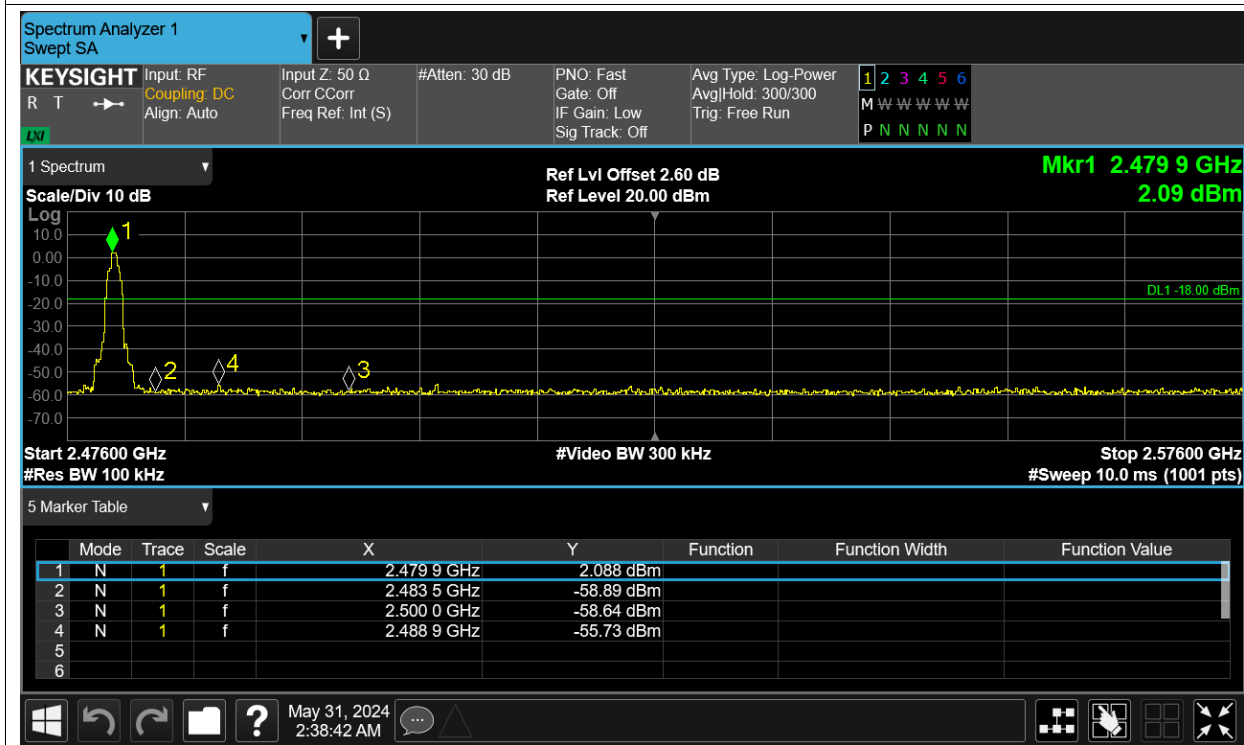


Band Edge(Hopping)


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	Hopping	-57.53	-20	Pass
NVNT	1-DH1	2480	Ant1	Hopping	-58.9	-20	Pass
NVNT	2-DH1	2402	Ant1	Hopping	-57.92	-20	Pass
NVNT	2-DH1	2480	Ant1	Hopping	-51.12	-20	Pass
NVNT	3-DH1	2402	Ant1	Hopping	-57.23	-20	Pass
NVNT	3-DH1	2480	Ant1	Hopping	-57.74	-20	Pass

Test Graphs


Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Ref

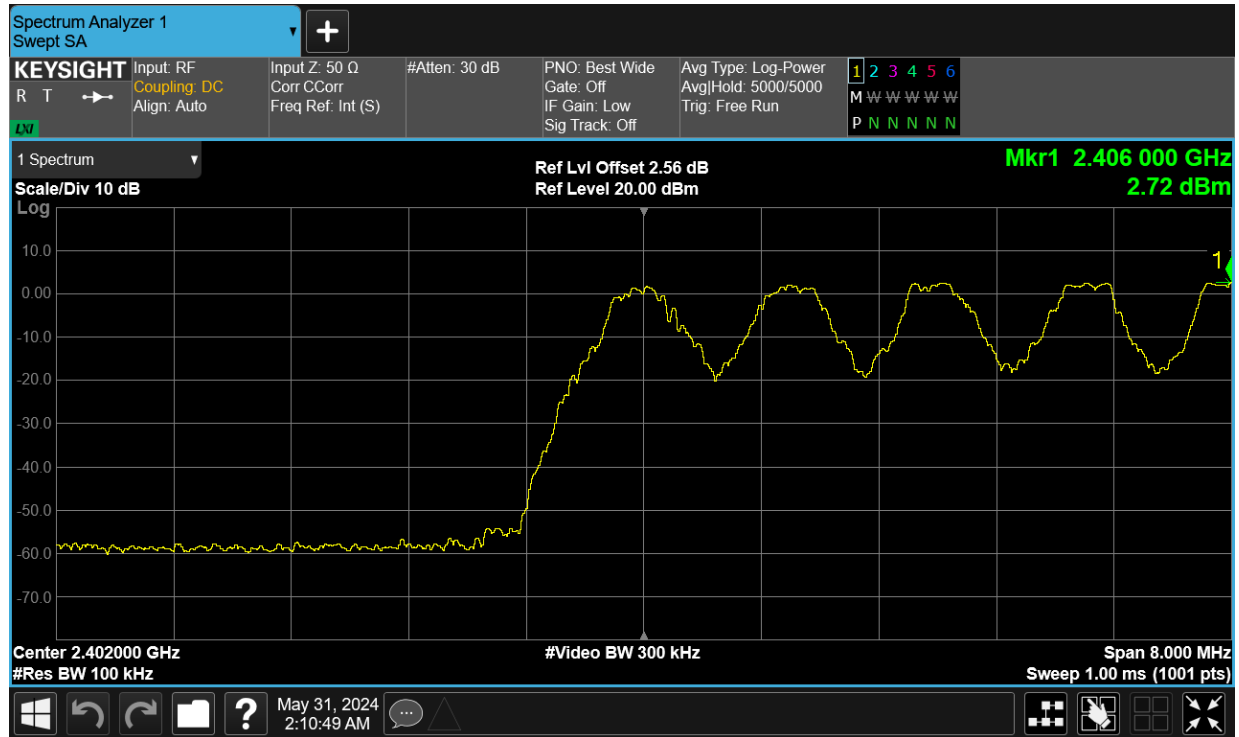


Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Emission

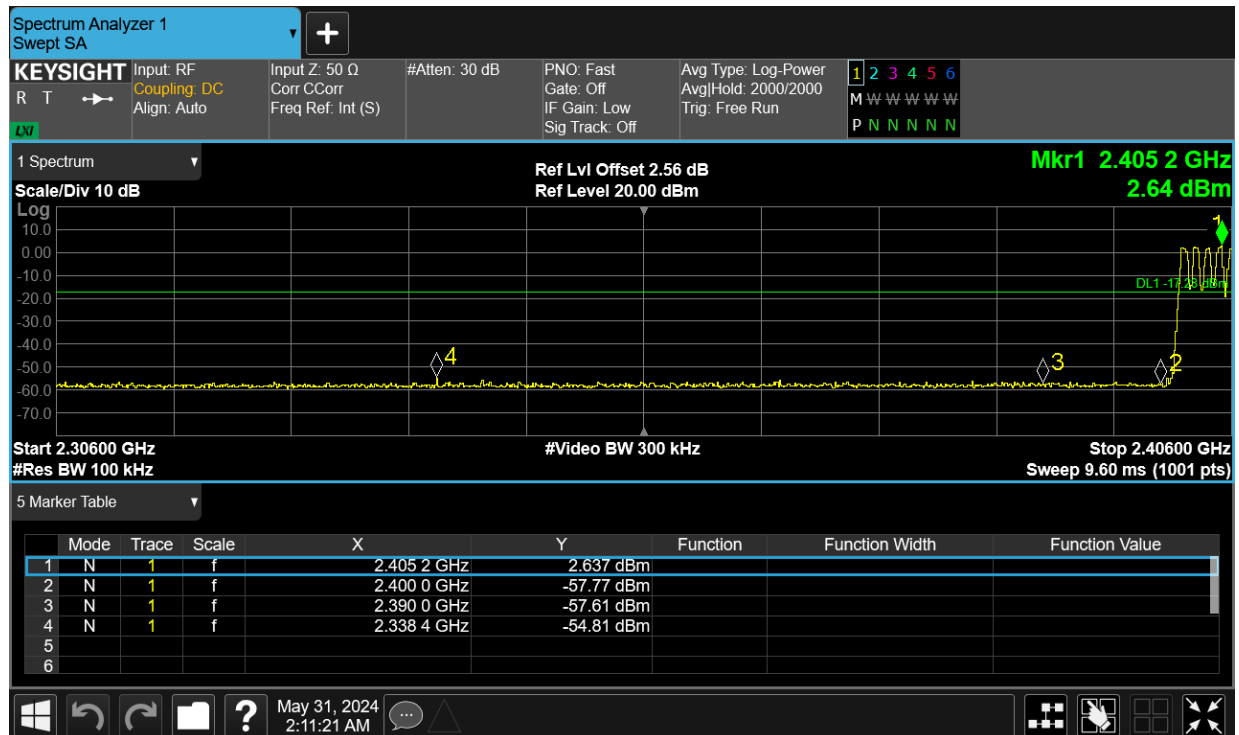


Band Edge(Hopping) NVNT 1-DH1 2480MHz Ant1 Hopping Ref

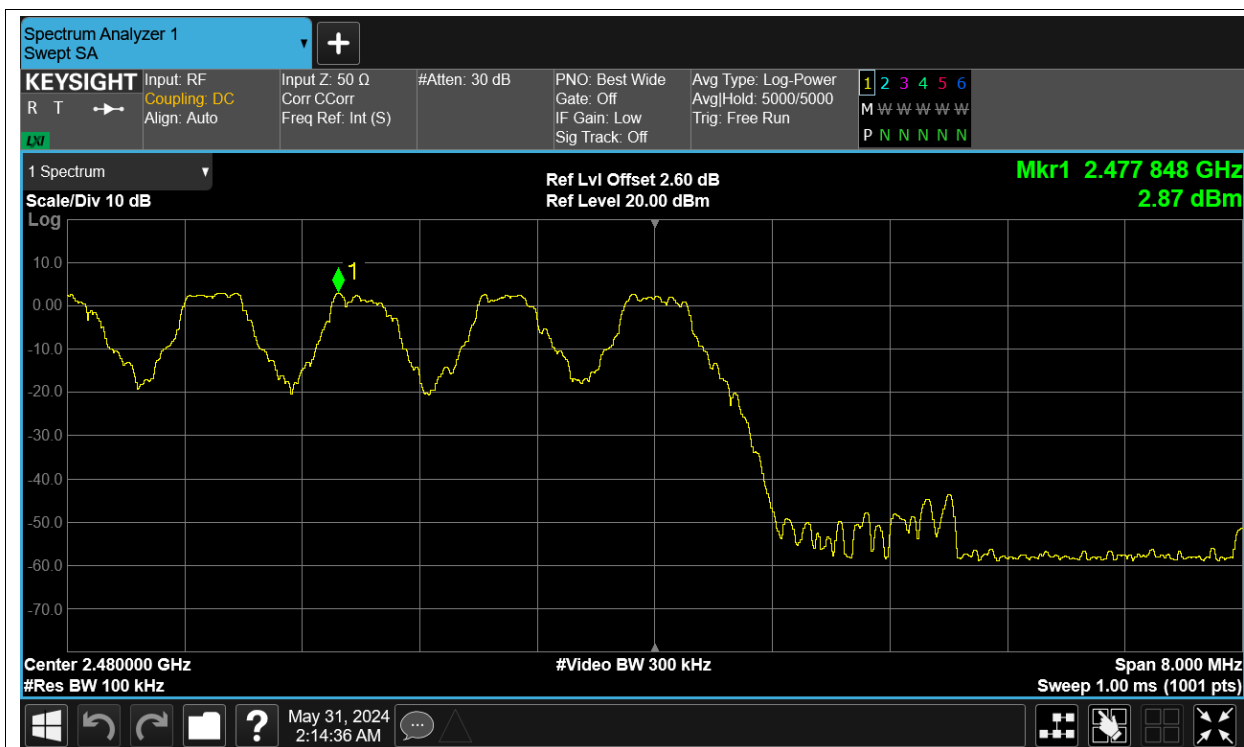


Band Edge(Hopping) NVNT 1-DH1 2480MHz Ant1 Hopping Emission

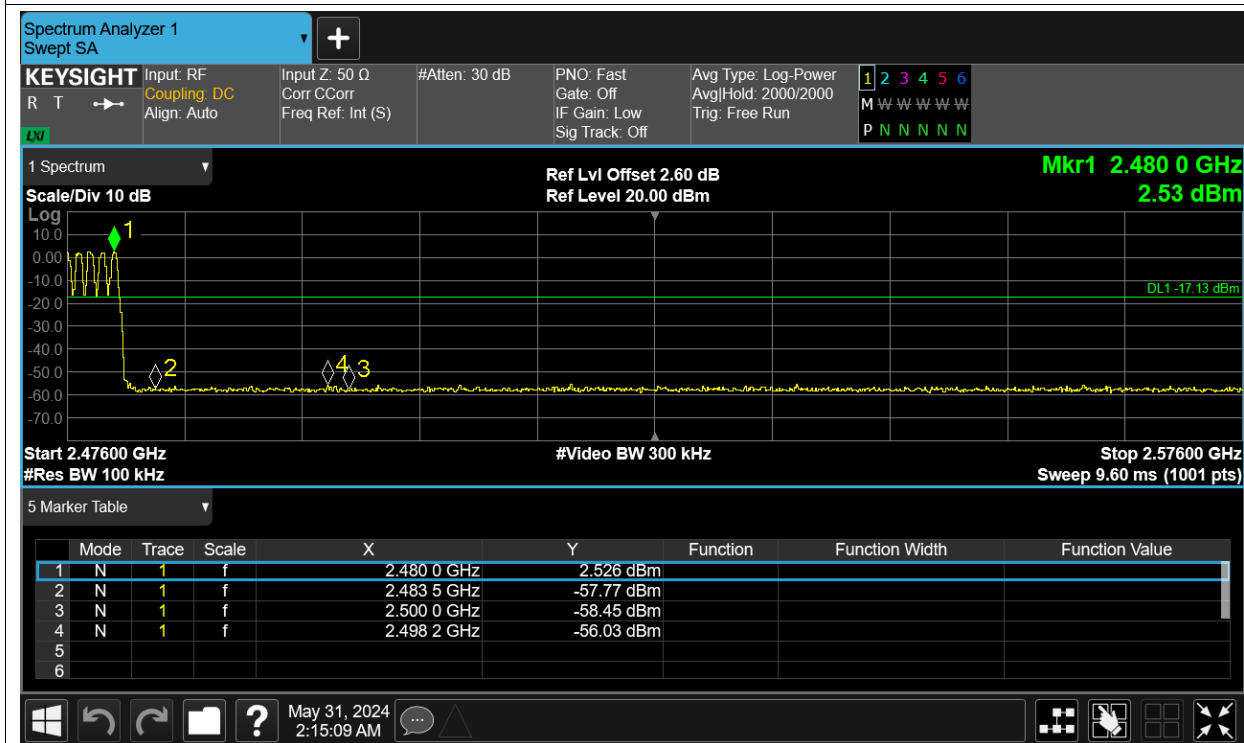


Band Edge(Hopping) NVNT 2-DH1 2402MHz Ant1 Hopping Ref

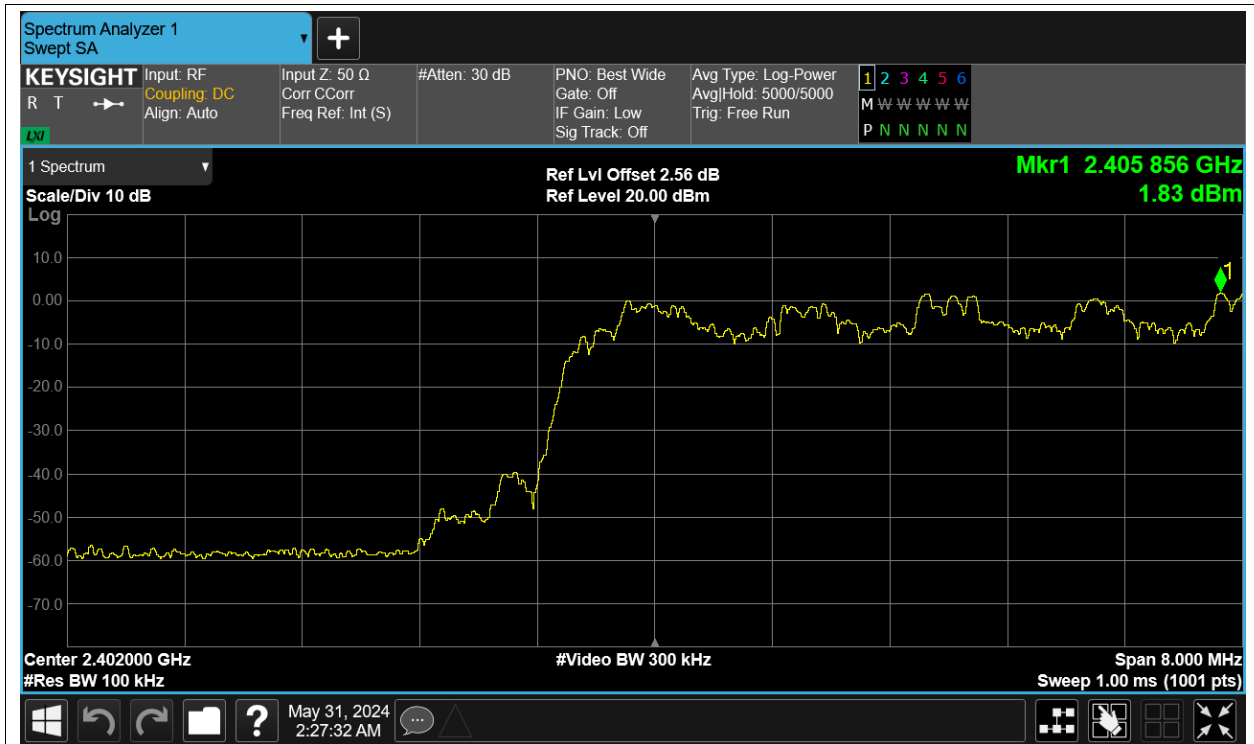


Band Edge(Hopping) NVNT 2-DH1 2402MHz Ant1 Hopping Emission

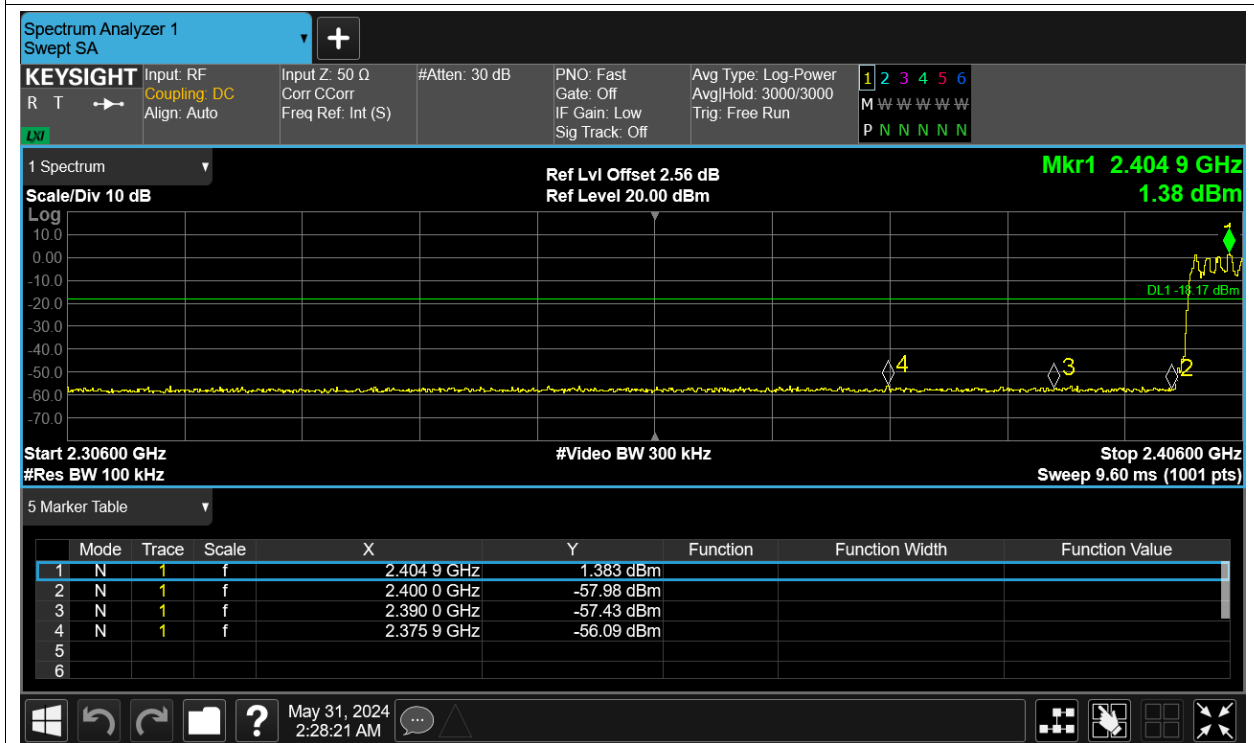


Band Edge(Hopping) NVNT 2-DH1 2480MHz Ant1 Hopping Ref

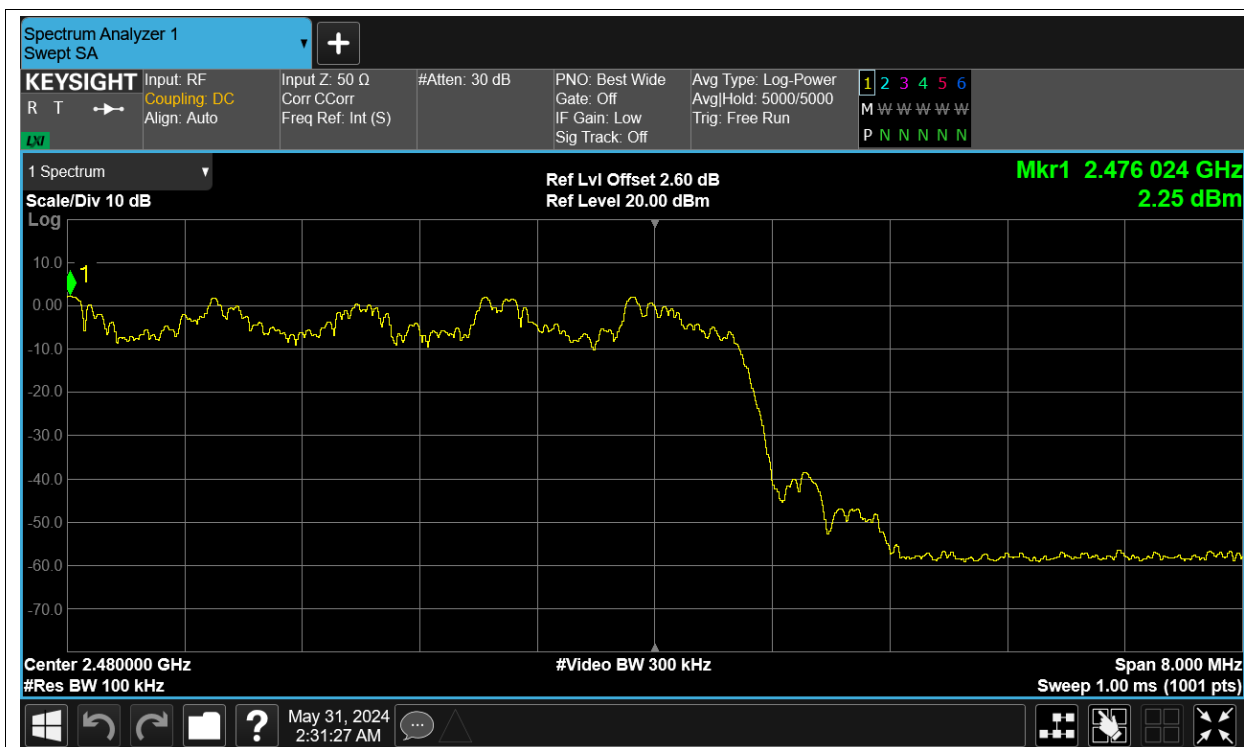


Band Edge(Hopping) NVNT 2-DH1 2480MHz Ant1 Hopping Emission

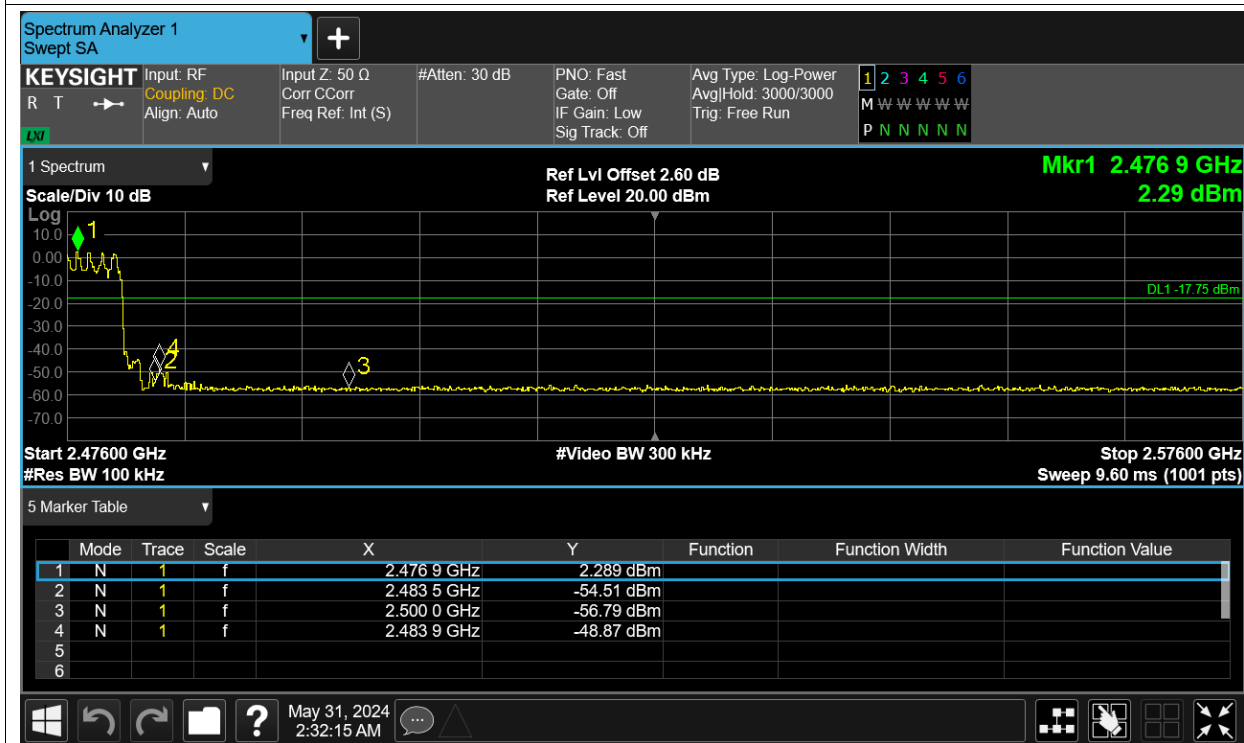


Band Edge(Hopping) NVNT 3-DH1 2402MHz Ant1 Hopping Ref

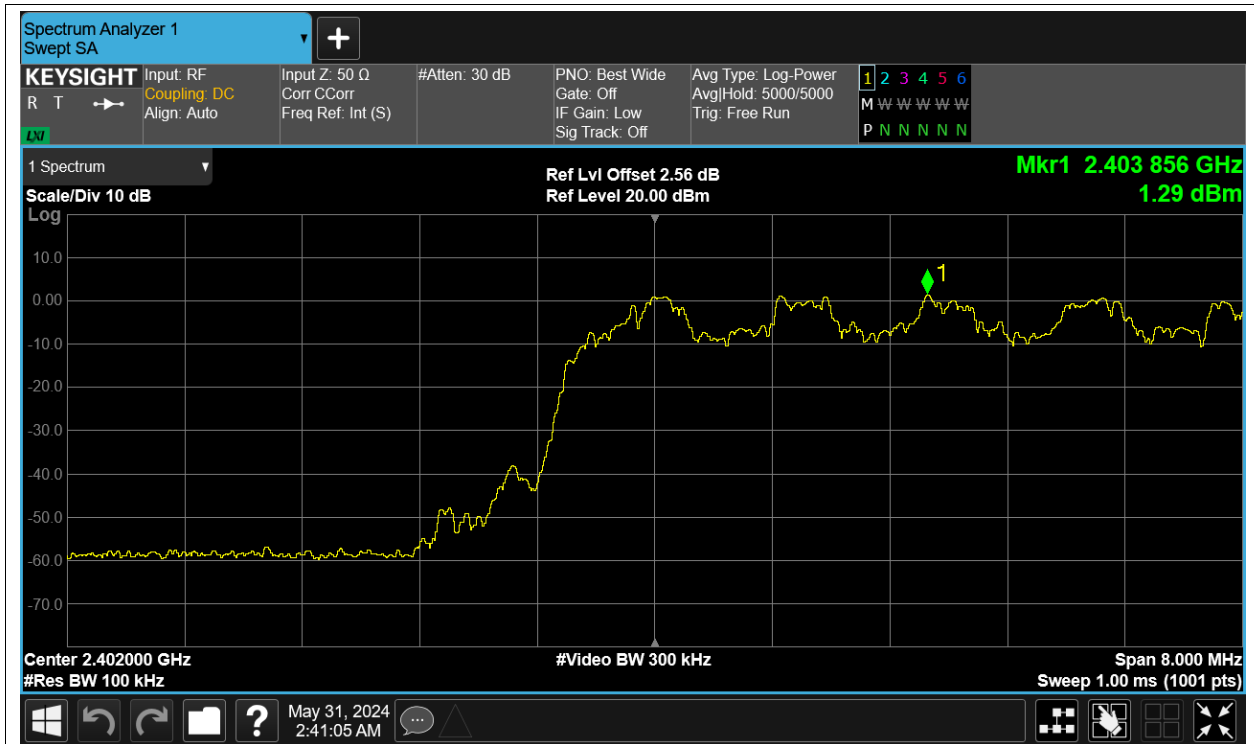


Band Edge(Hopping) NVNT 3-DH1 2402MHz Ant1 Hopping Emission

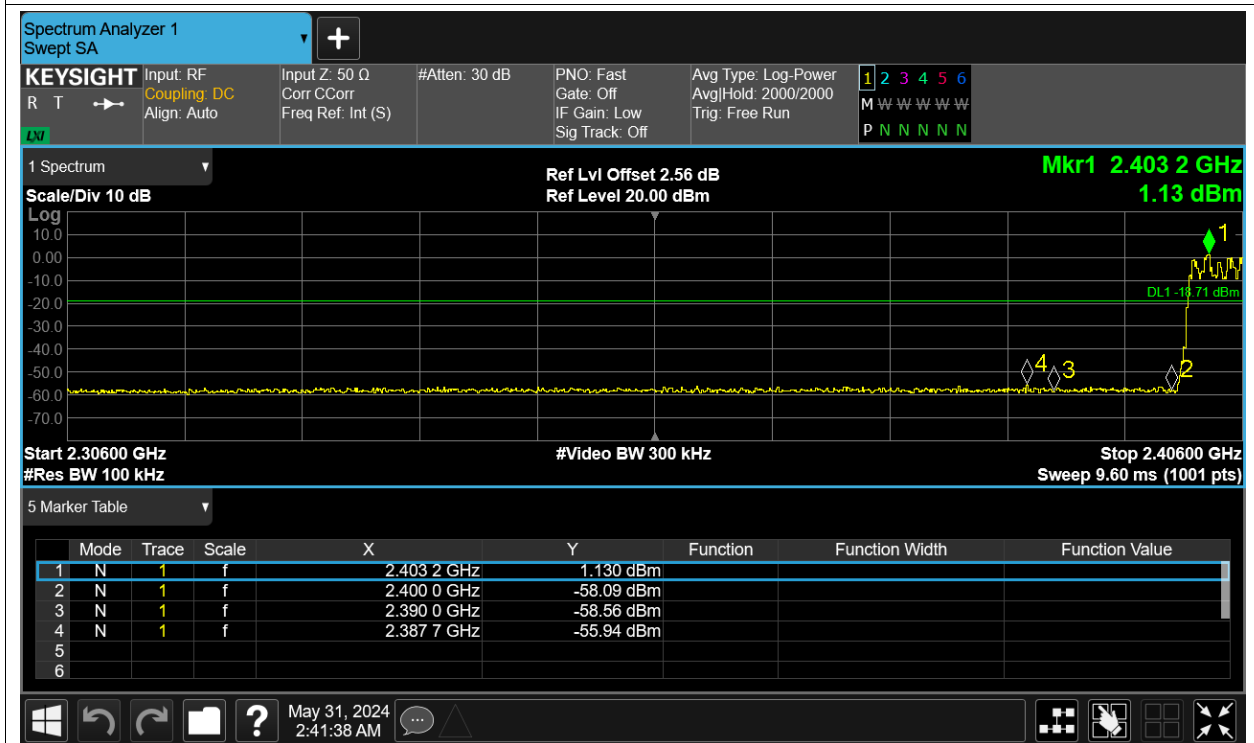

Band Edge(Hopping) NVNT 3-DH1 2480MHz Ant1 Hopping Ref

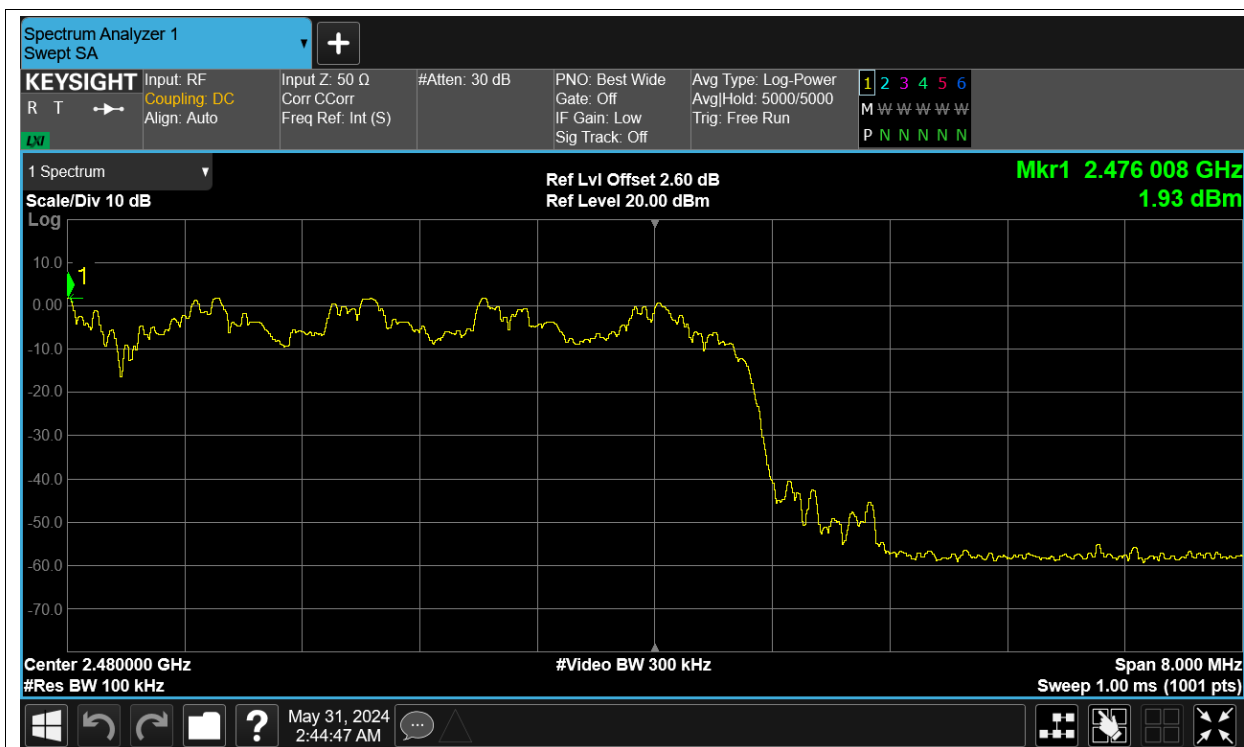

Band Edge(Hopping) NVNT 3-DH1 2480MHz Ant1 Hopping Emission

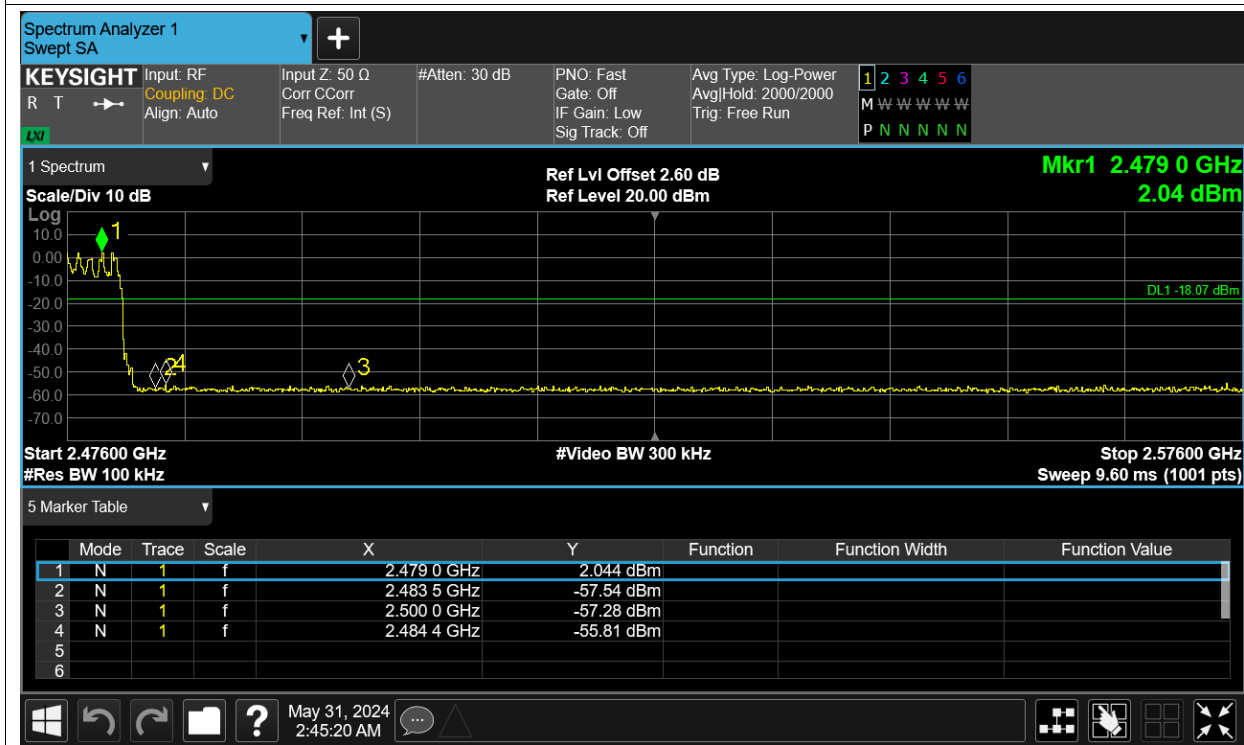


Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	-50.68	-20	Pass
NVNT	1-DH1	2441	Ant1	-53.87	-20	Pass
NVNT	1-DH1	2480	Ant1	-50.35	-20	Pass
NVNT	2-DH1	2402	Ant1	-51.16	-20	Pass
NVNT	2-DH1	2441	Ant1	-52.96	-20	Pass
NVNT	2-DH1	2480	Ant1	-51.79	-20	Pass
NVNT	3-DH1	2402	Ant1	-51.13	-20	Pass
NVNT	3-DH1	2441	Ant1	-52.83	-20	Pass
NVNT	3-DH1	2480	Ant1	-49.5	-20	Pass

Test Graphs


Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Ref

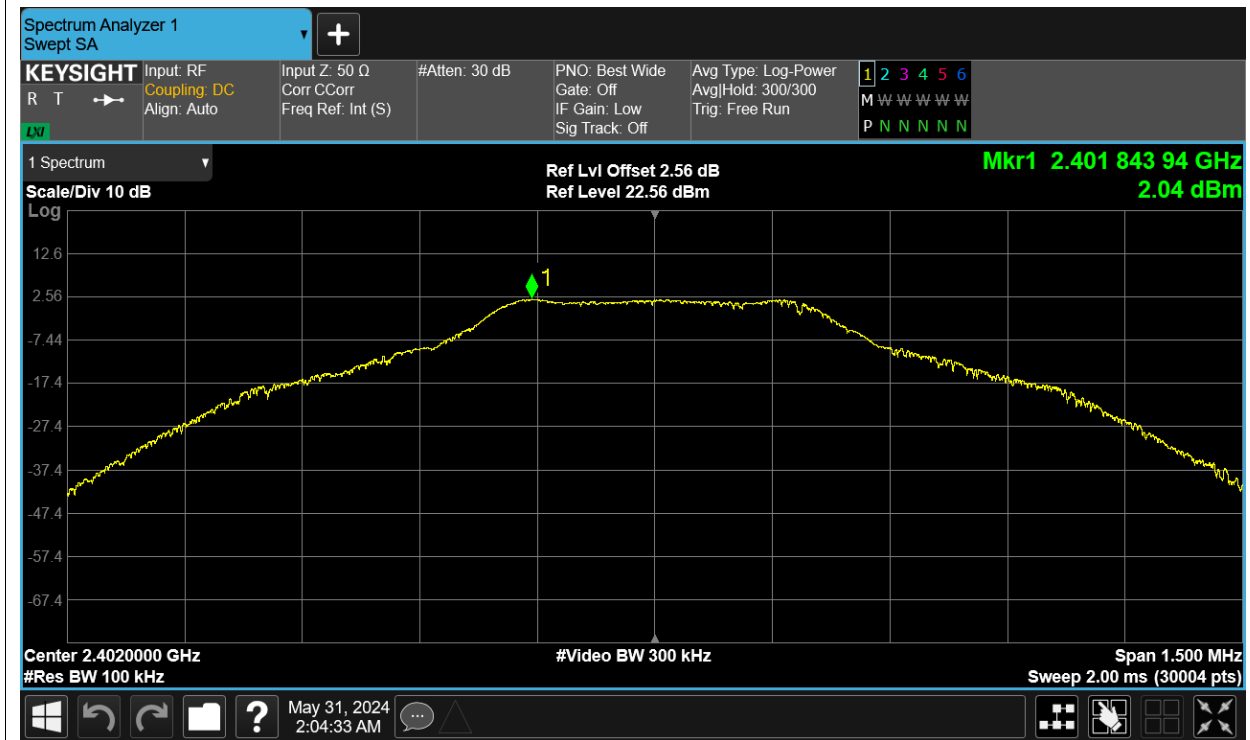


Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Emission

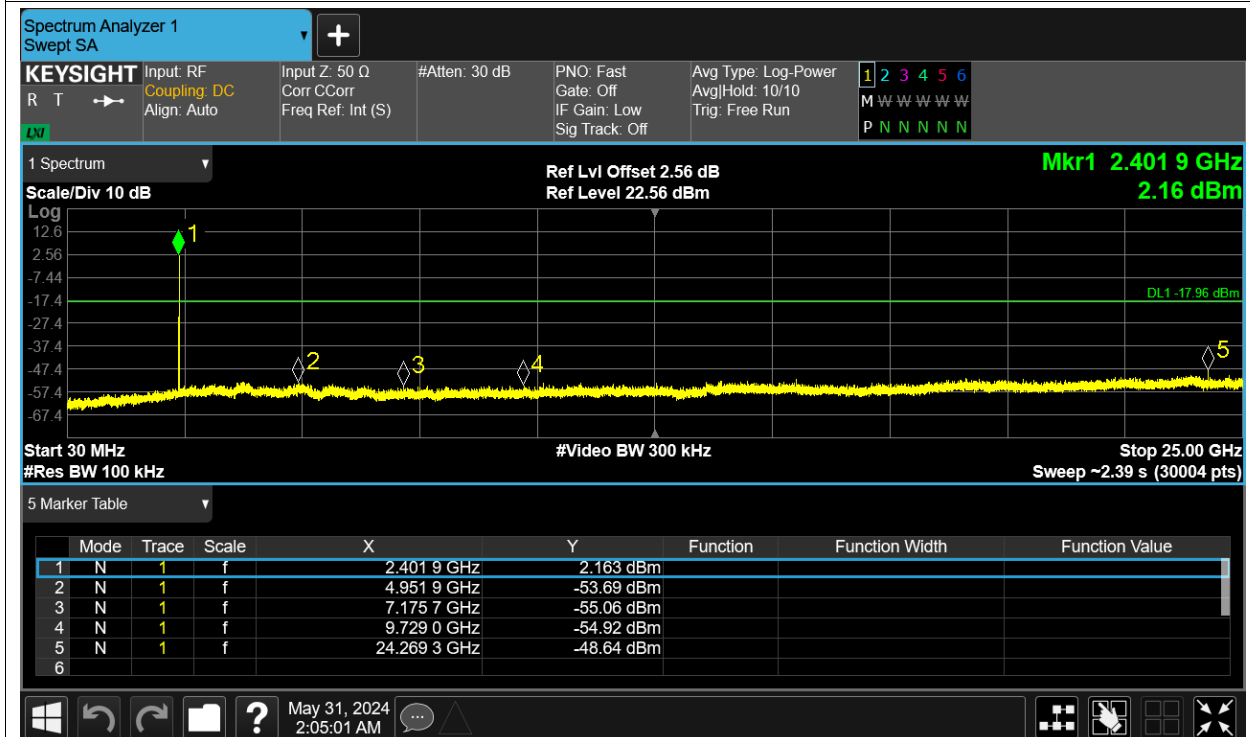


Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Ref

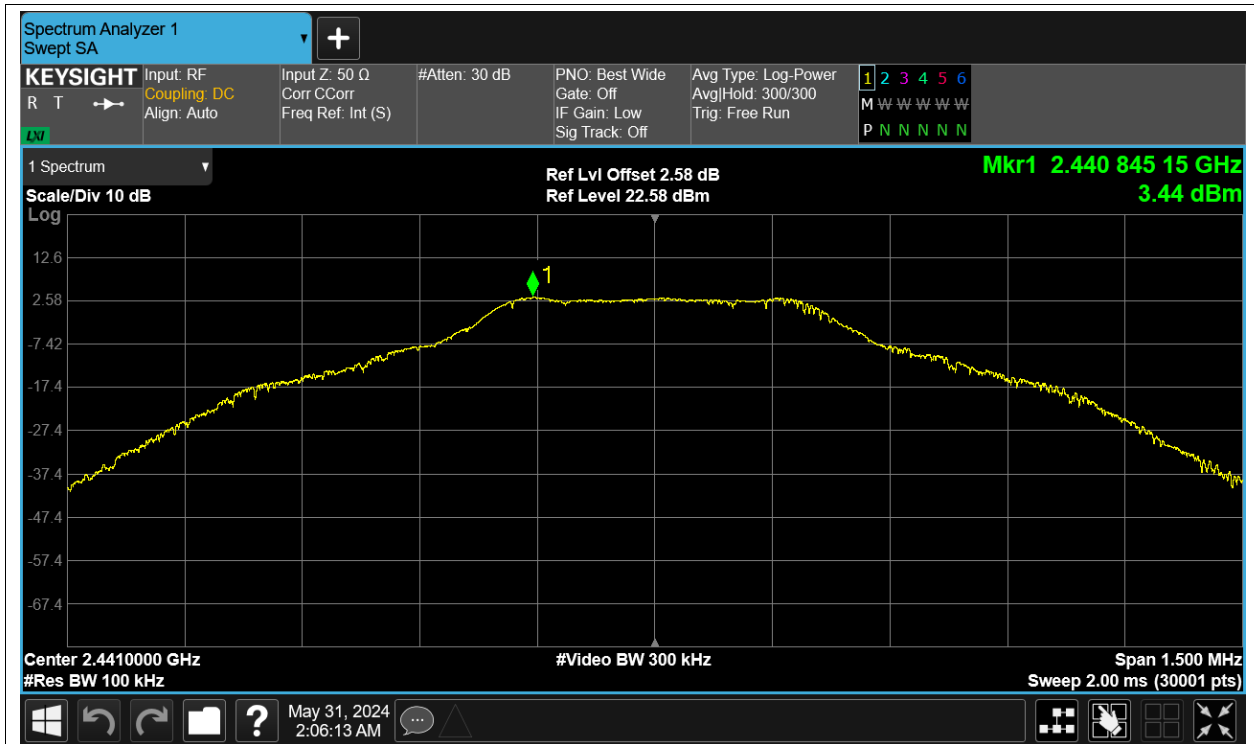


Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Emission

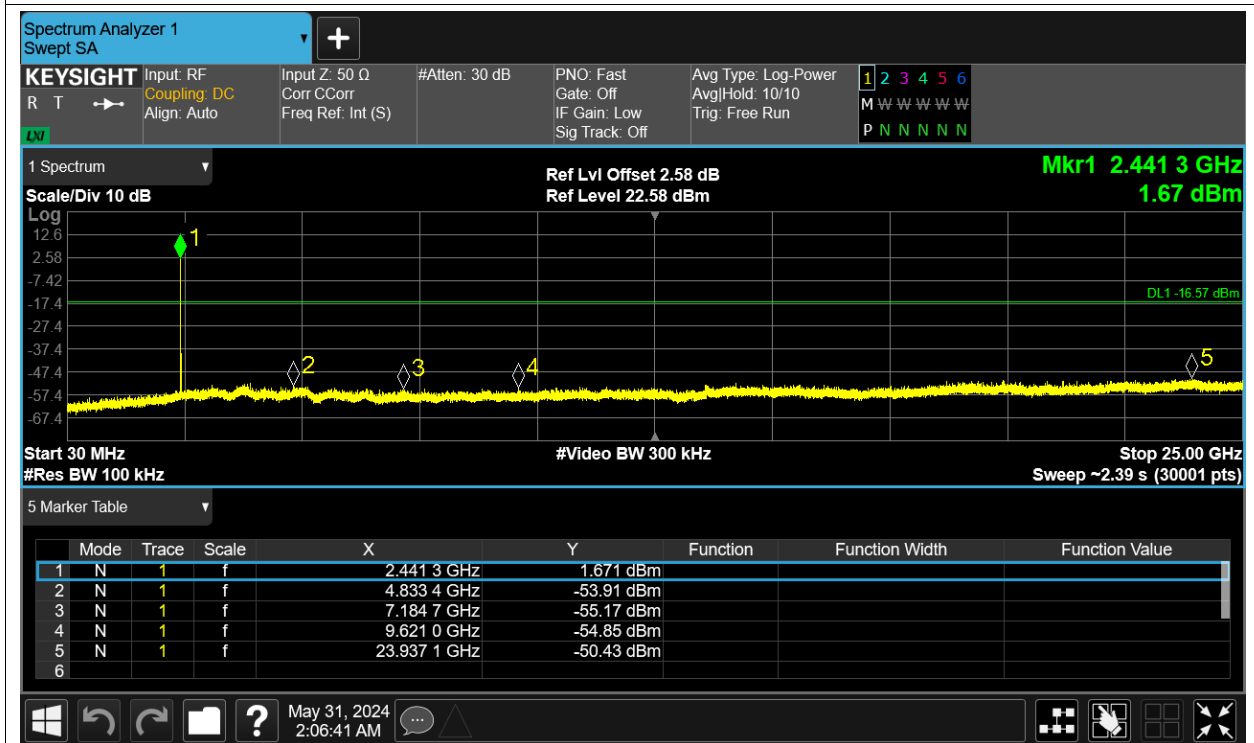


Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Ref

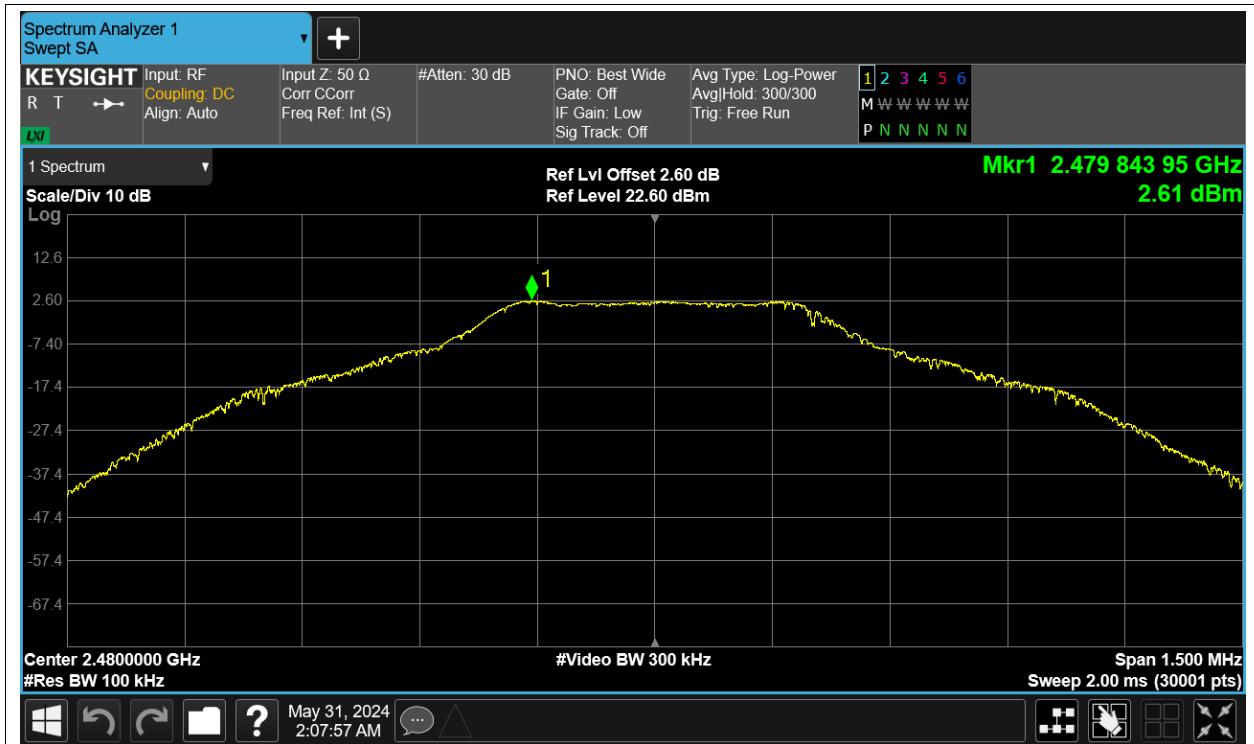


Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Emission

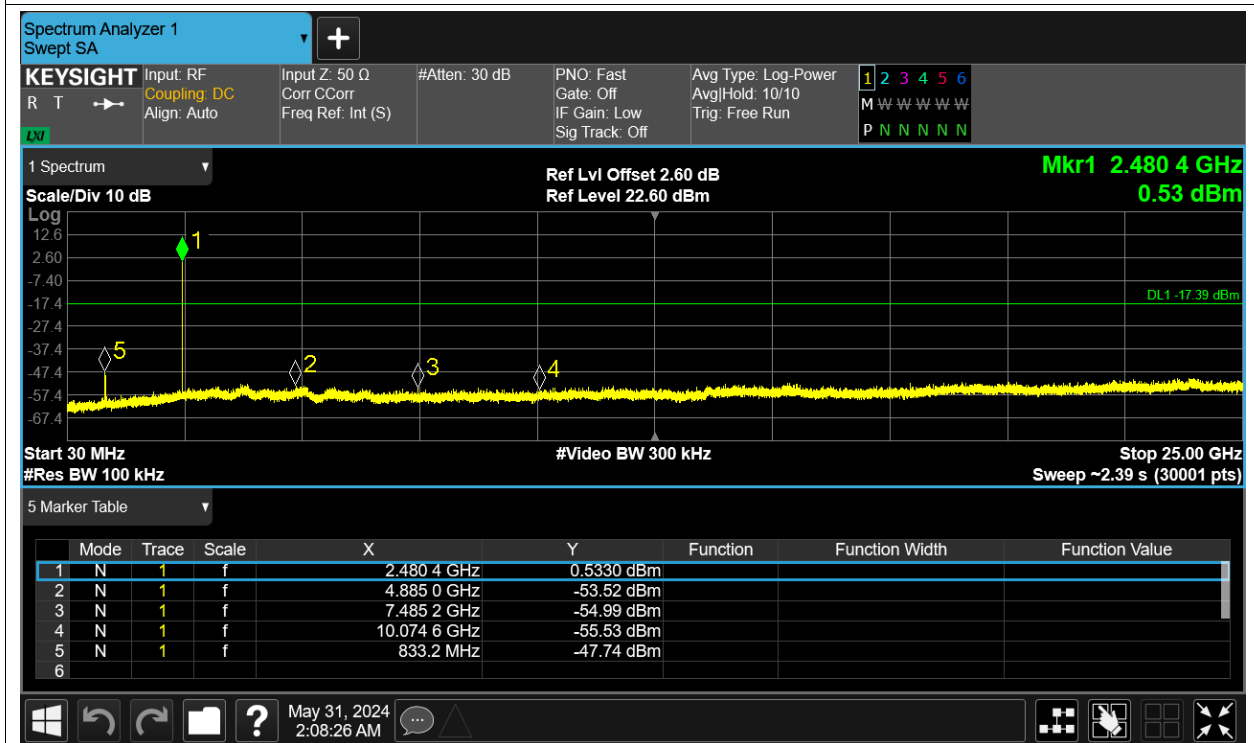


Tx. Spurious NVNT 2-DH1 2402MHz Ant1 Ref

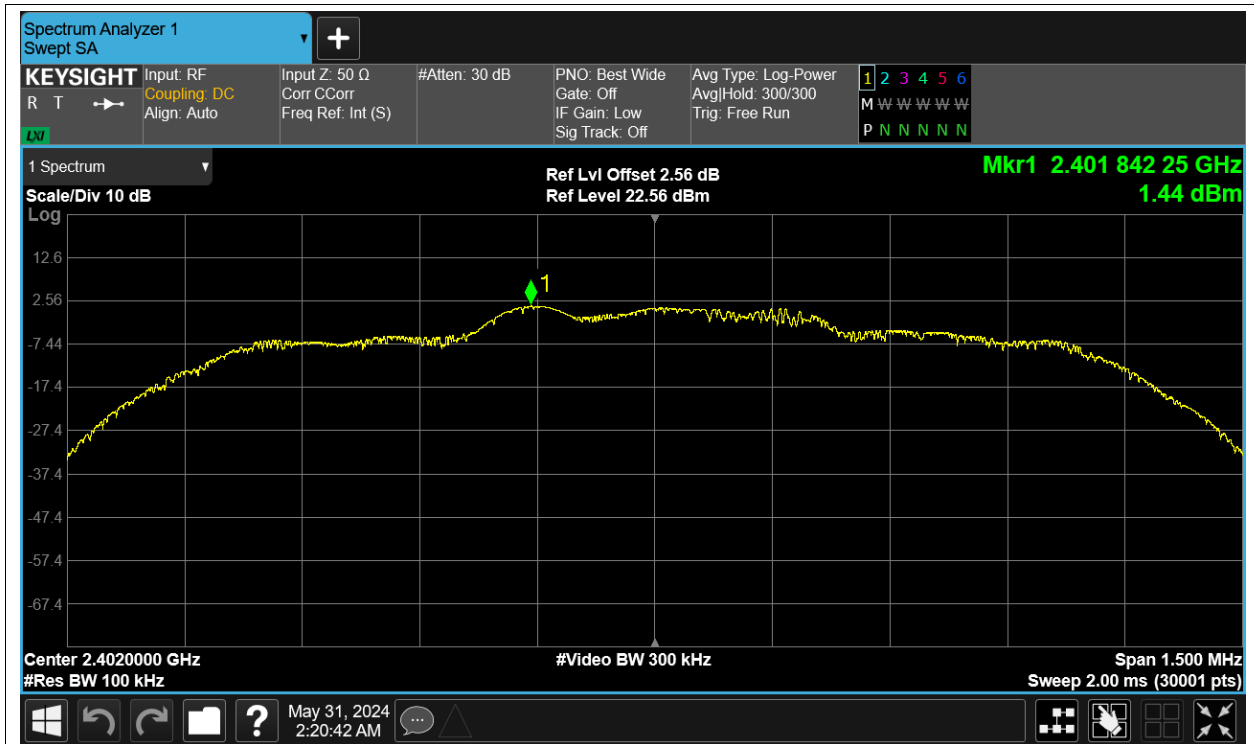


Tx. Spurious NVNT 2-DH1 2402MHz Ant1 Emission

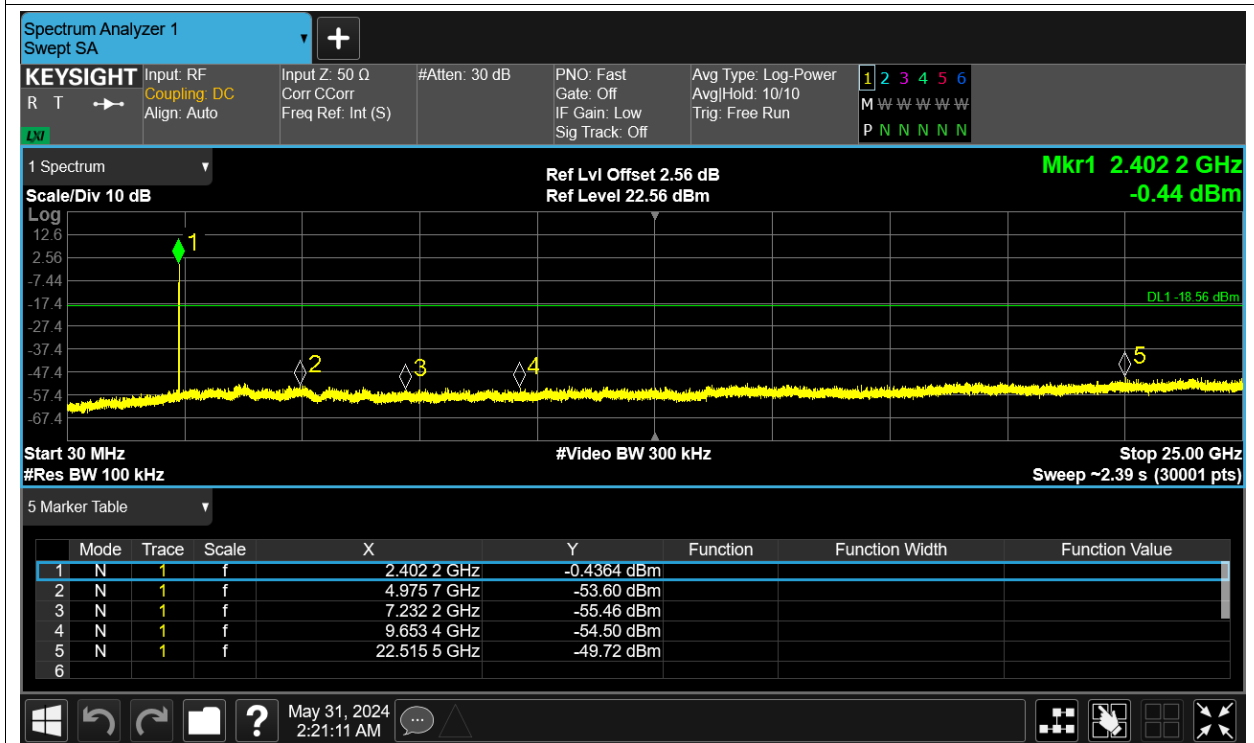


Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Ref

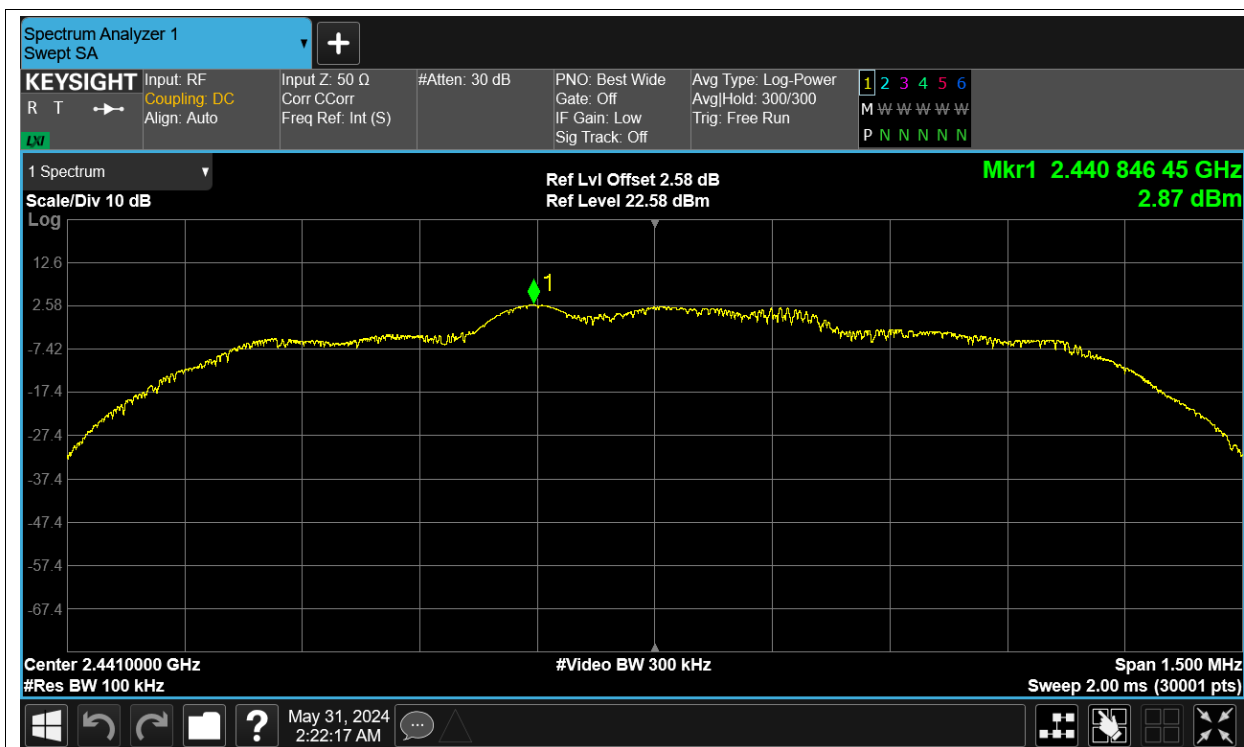


Tx. Spurious NVNT 2-DH1 2441MHz Ant1 Emission

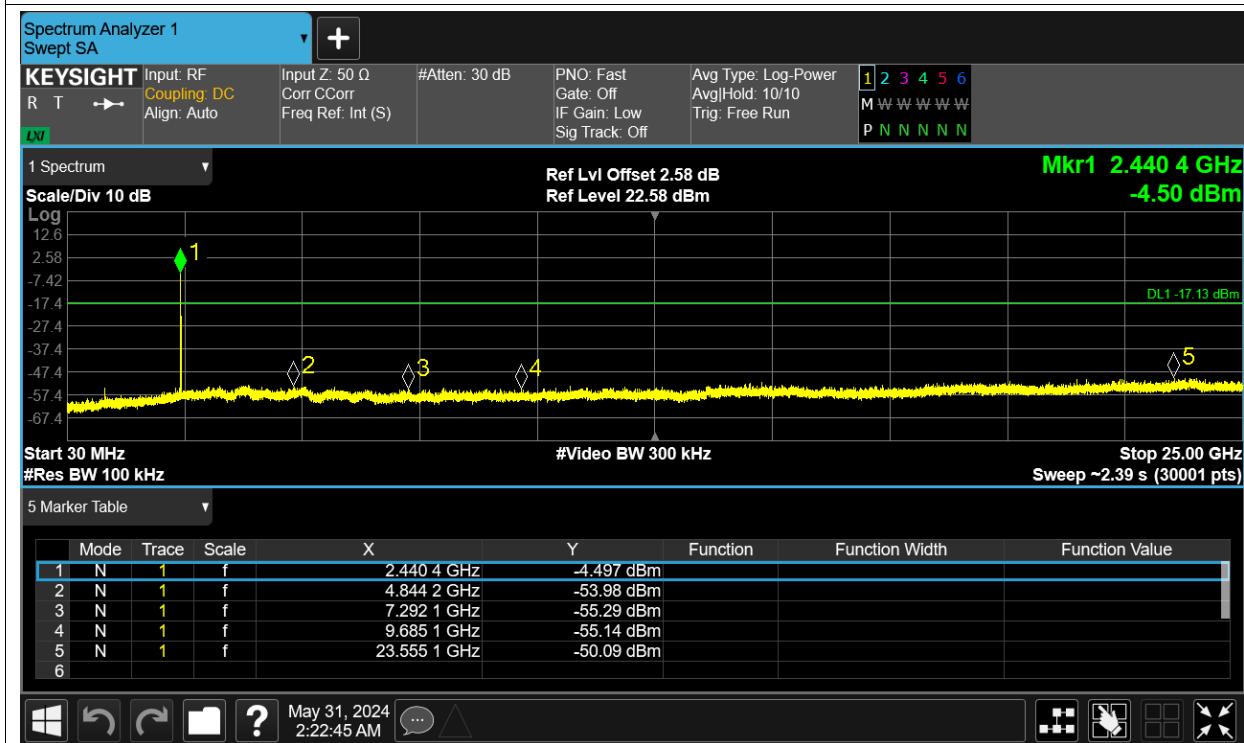


Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Ref

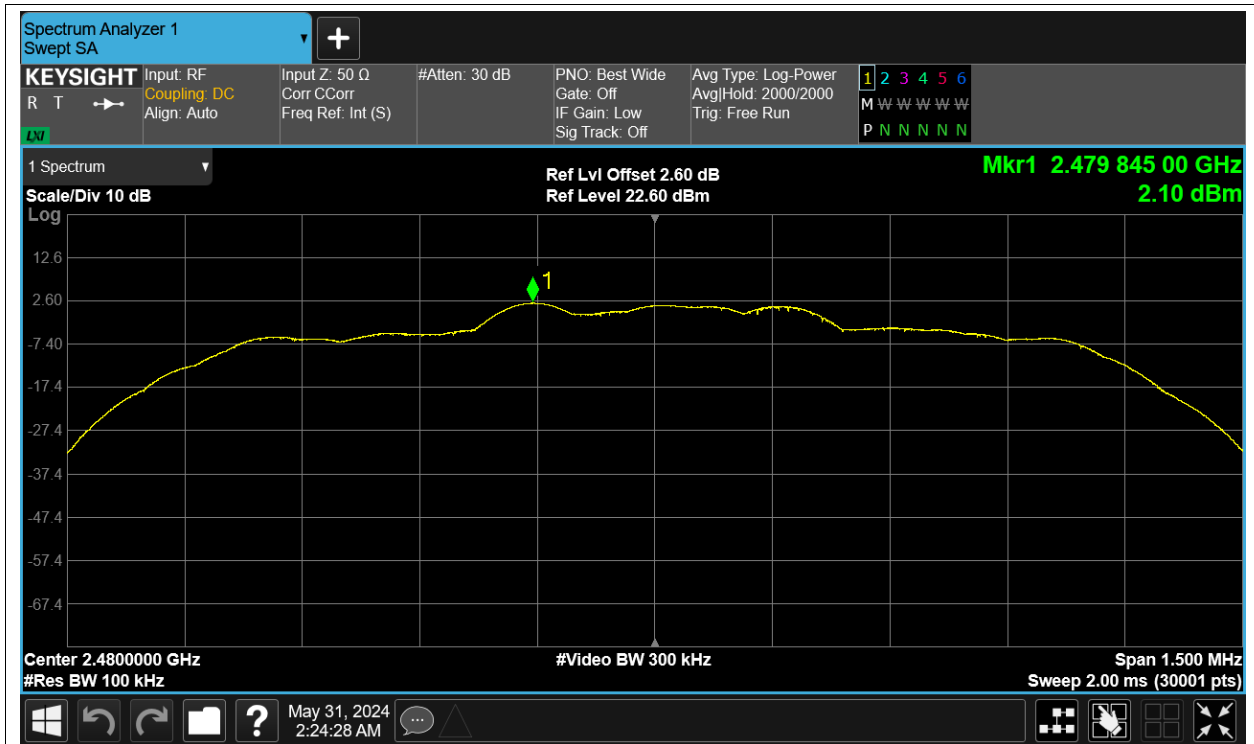


Tx. Spurious NVNT 2-DH1 2480MHz Ant1 Emission

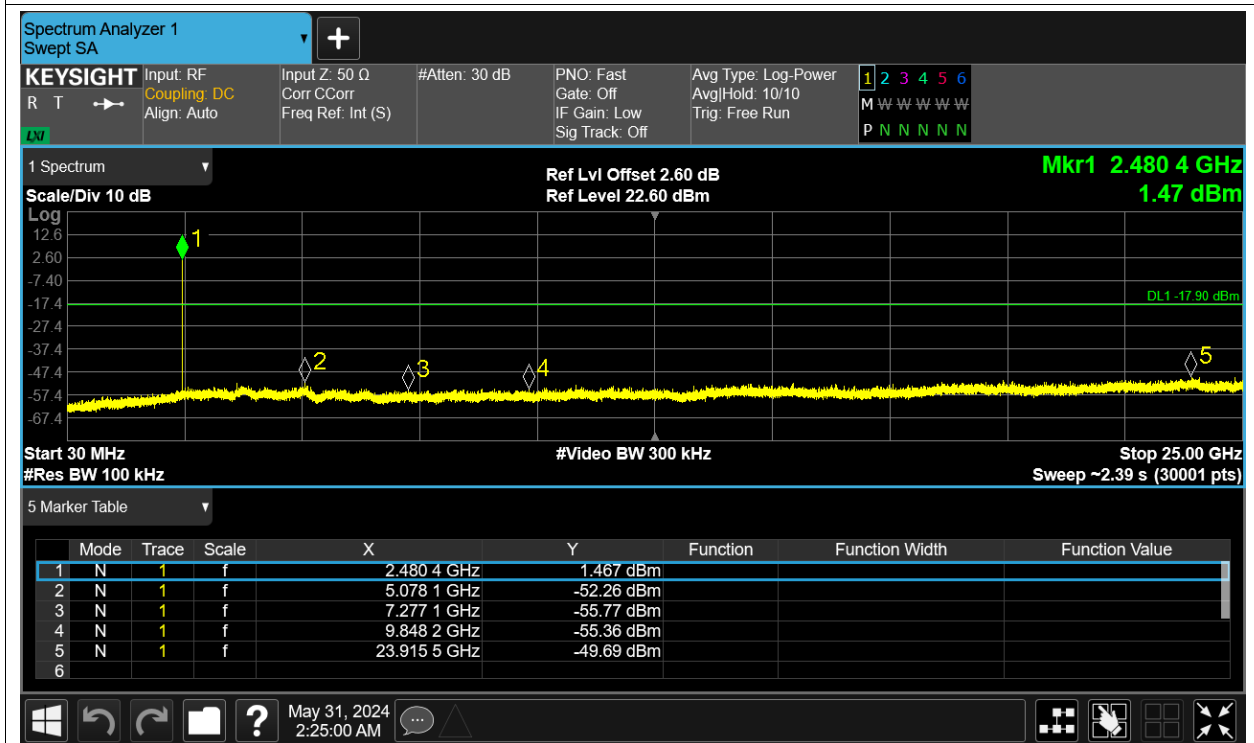


Tx. Spurious NVNT 3-DH1 2402MHz Ant1 Ref

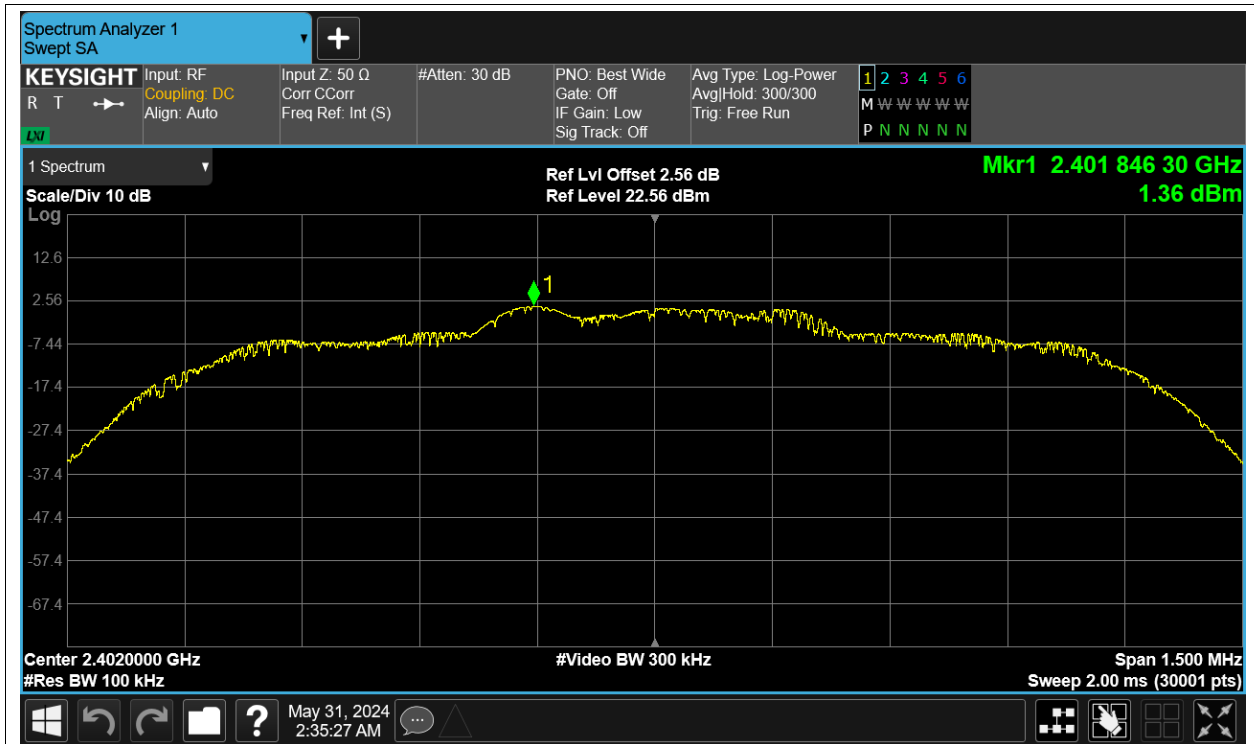


Tx. Spurious NVNT 3-DH1 2402MHz Ant1 Emission

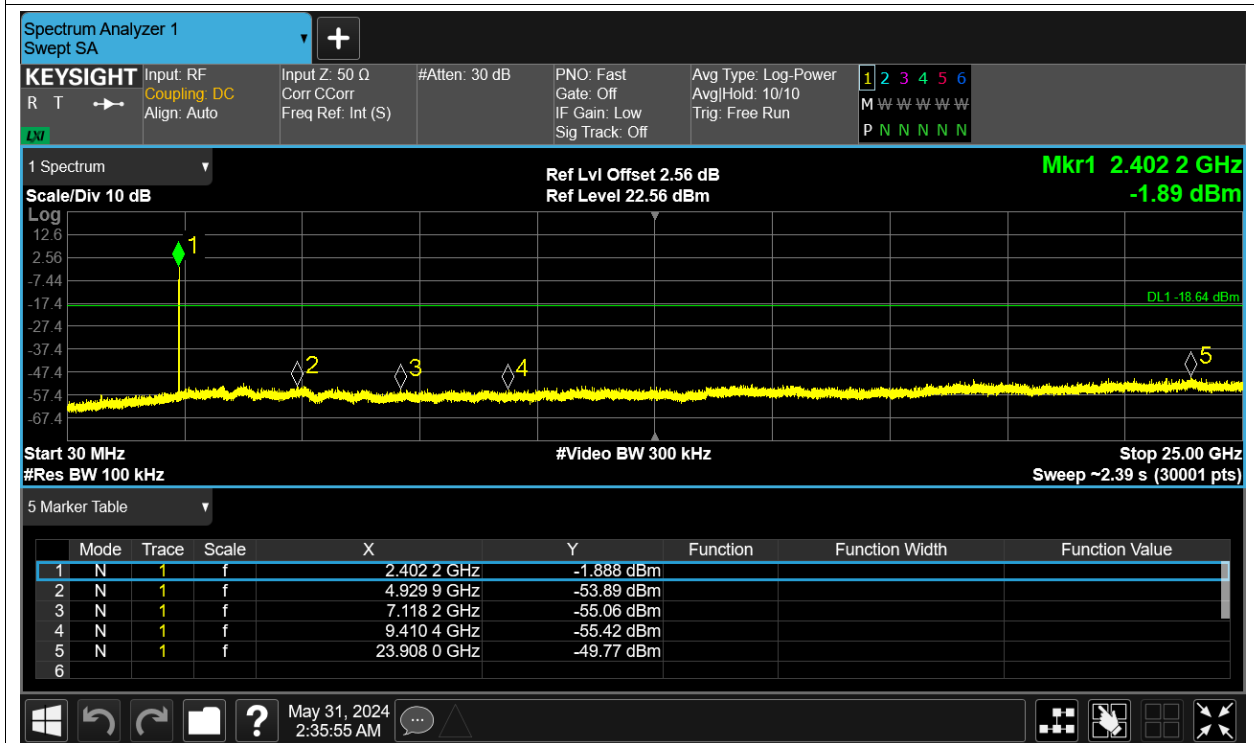


Tx. Spurious NVNT 3-DH1 2441MHz Ant1 Ref

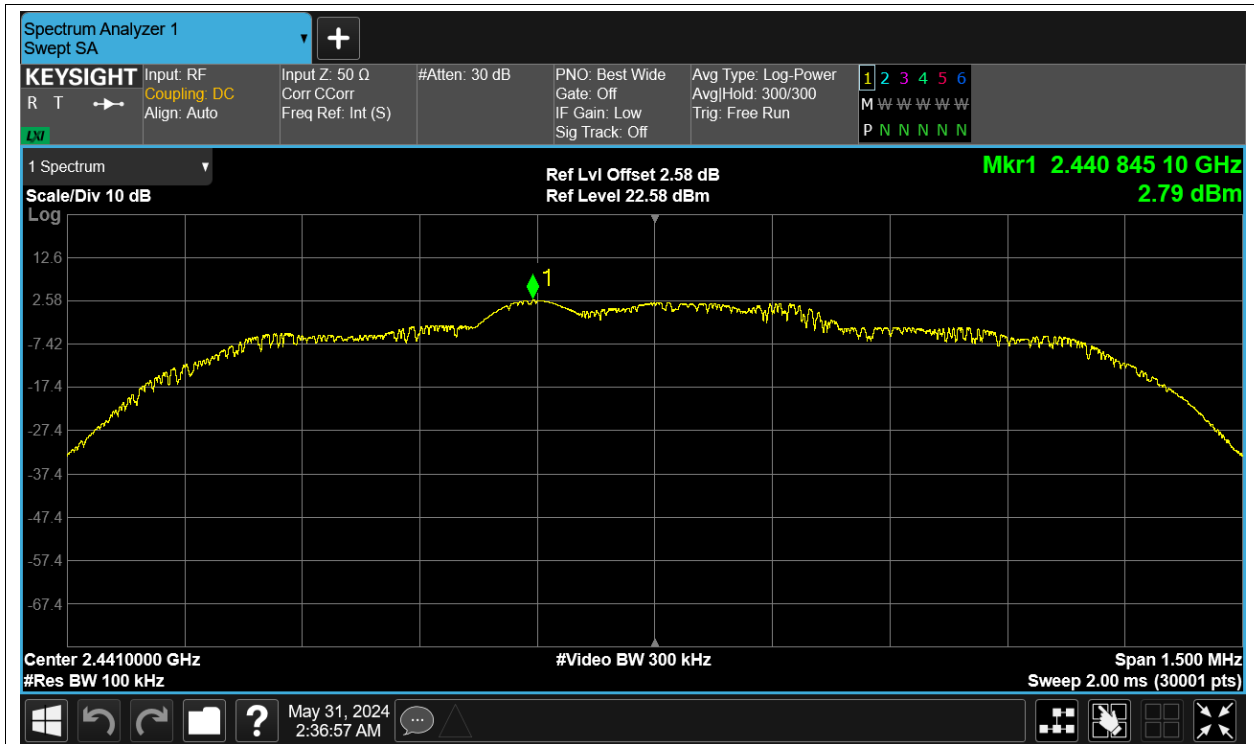


Tx. Spurious NVNT 3-DH1 2441MHz Ant1 Emission

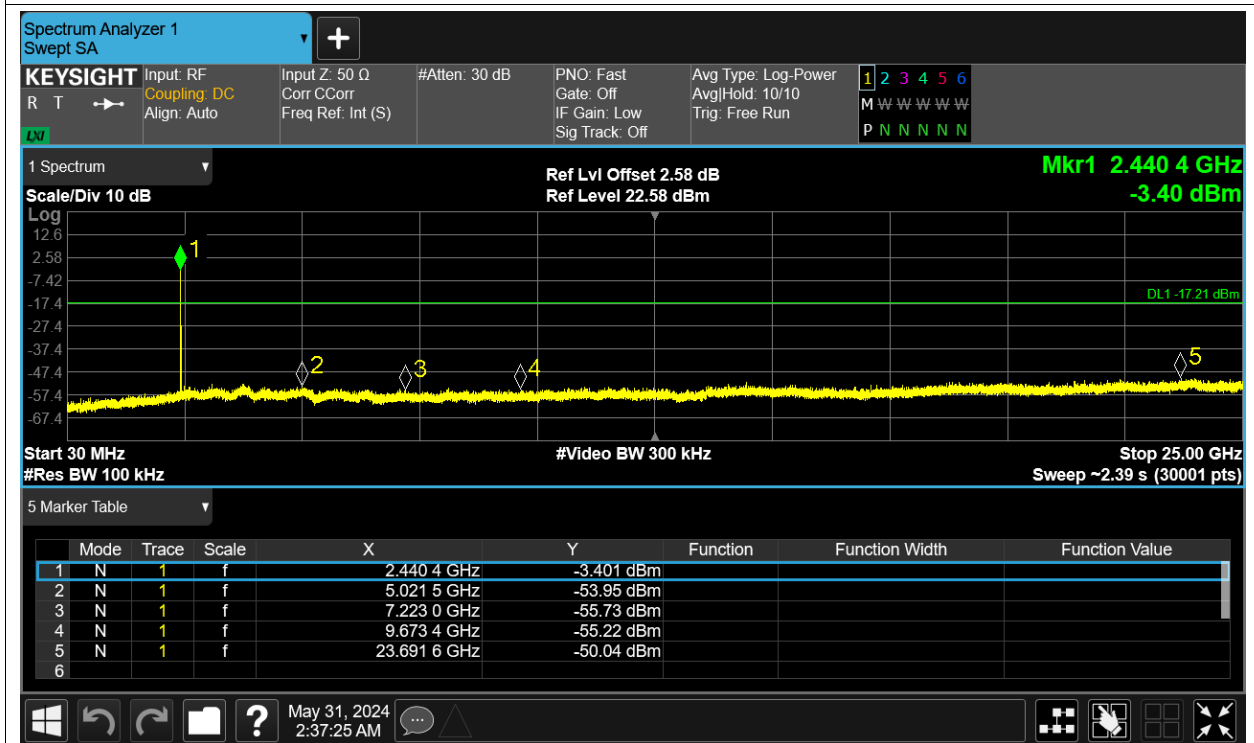

Tx. Spurious NVNT 3-DH1 2480MHz Ant1 Ref

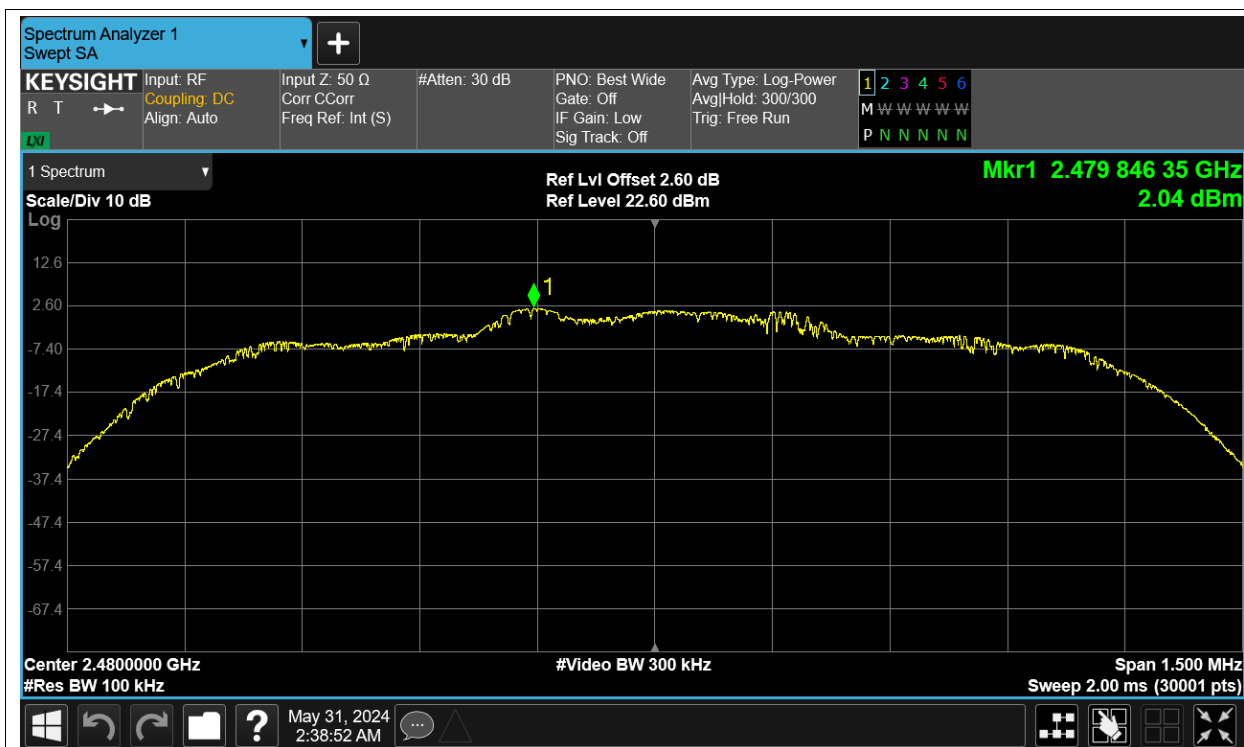

Tx. Spurious NVNT 3-DH1 2480MHz Ant1 Emission

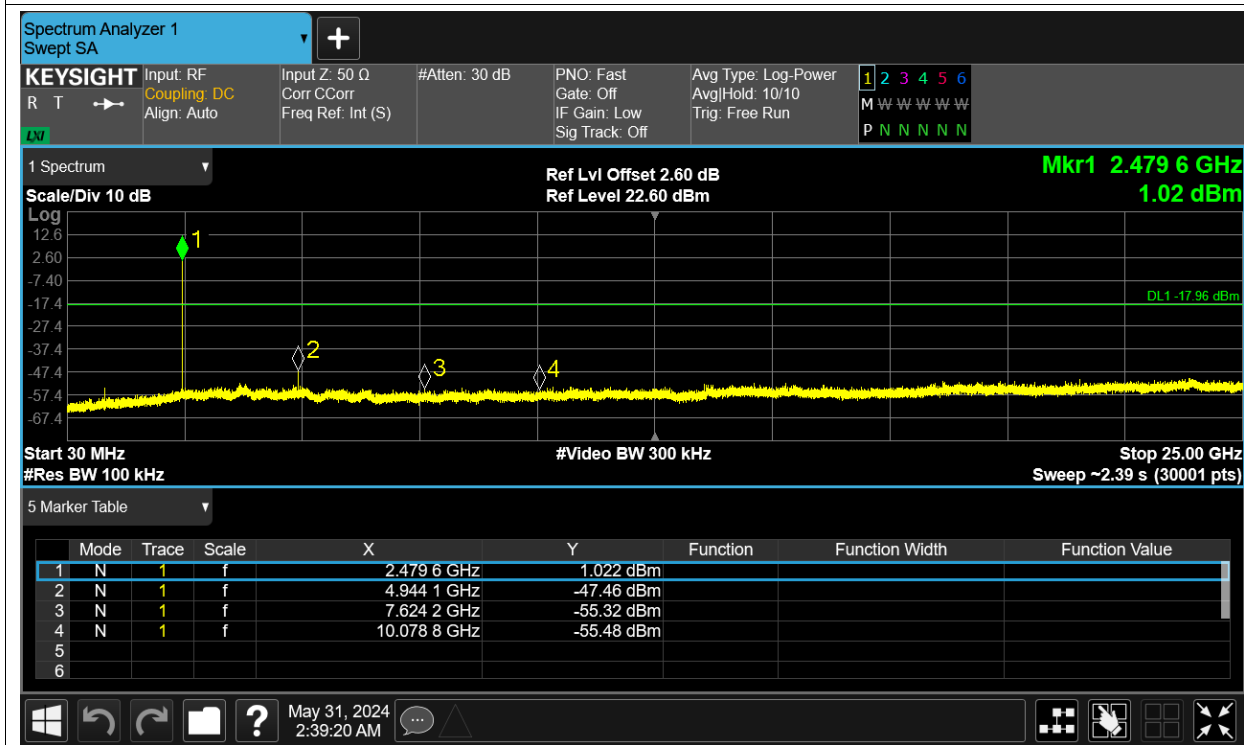


Number of Hopping Channel


Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH1	Ant1	79	15	Pass
NVNT	2-DH1	Ant1	79	15	Pass
NVNT	3-DH1	Ant1	79	15	Pass

Test Graphs


Hopping No. NVNT 1-DH1 2441MHz Ant1.

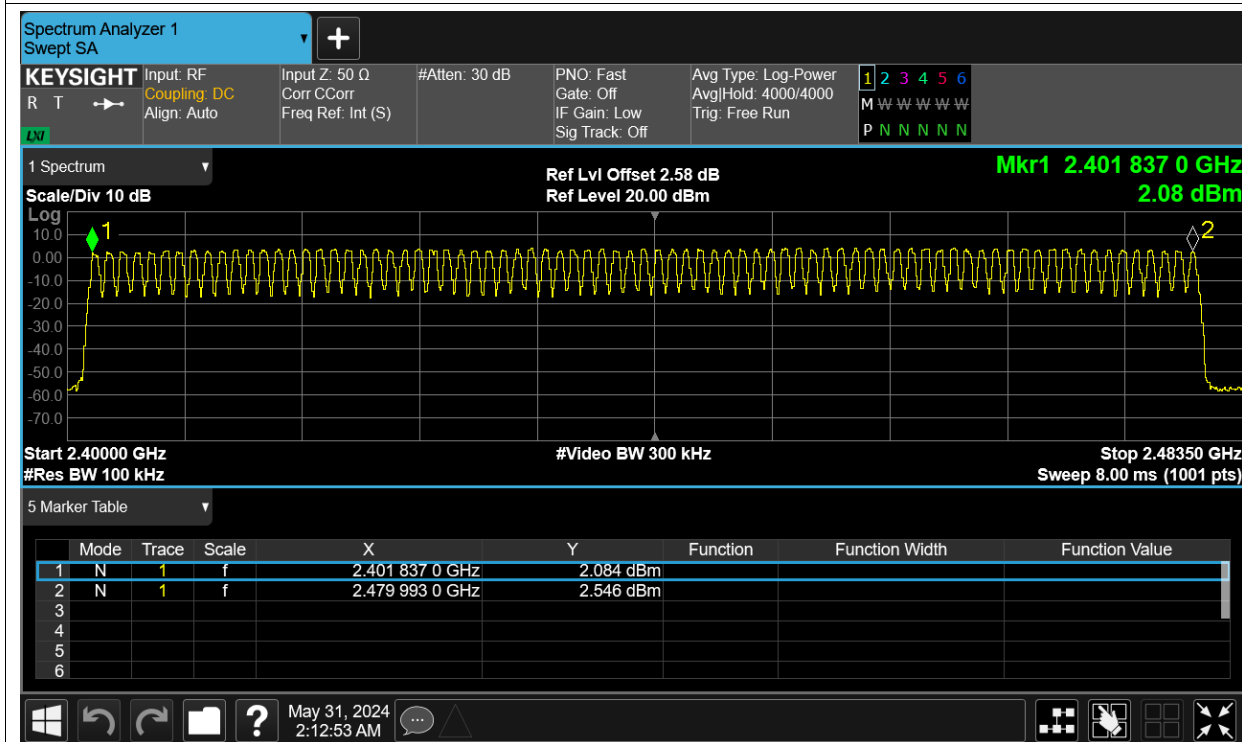

Hopping No. NVNT 2-DH1 2441MHz Ant1

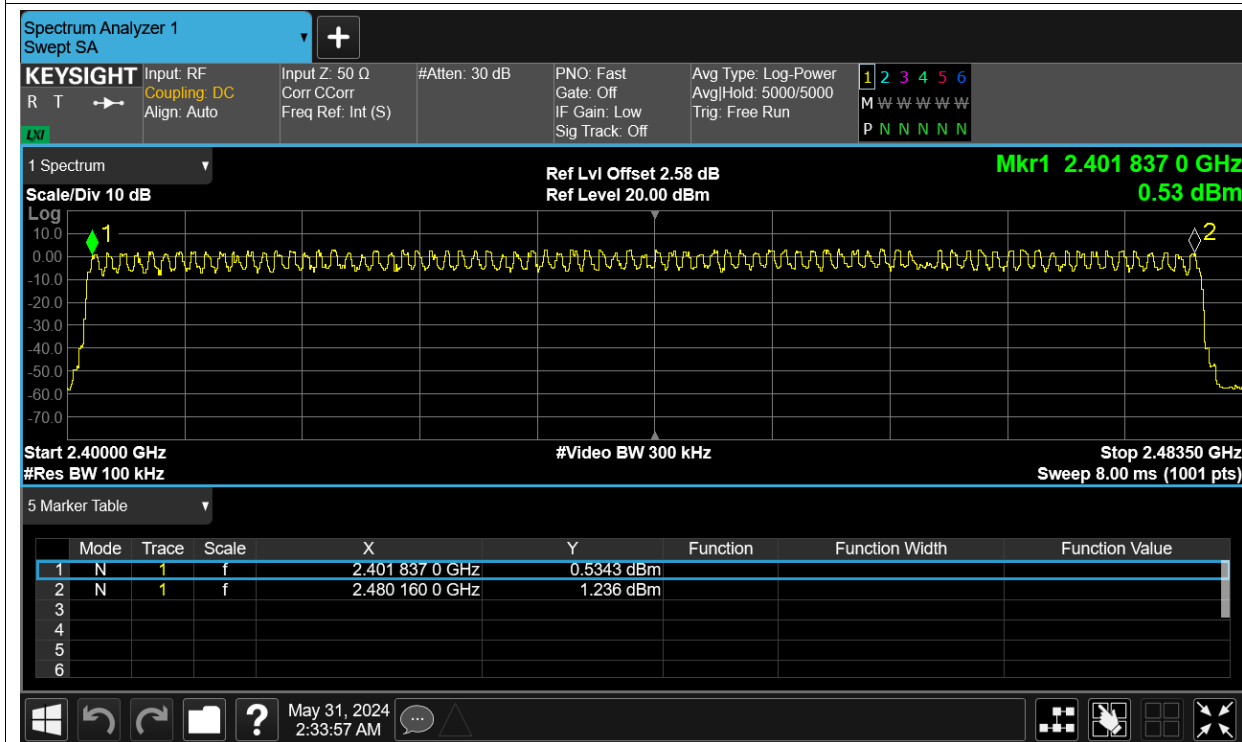

Hopping No. NVNT 3-DH1 2441MHz Ant1

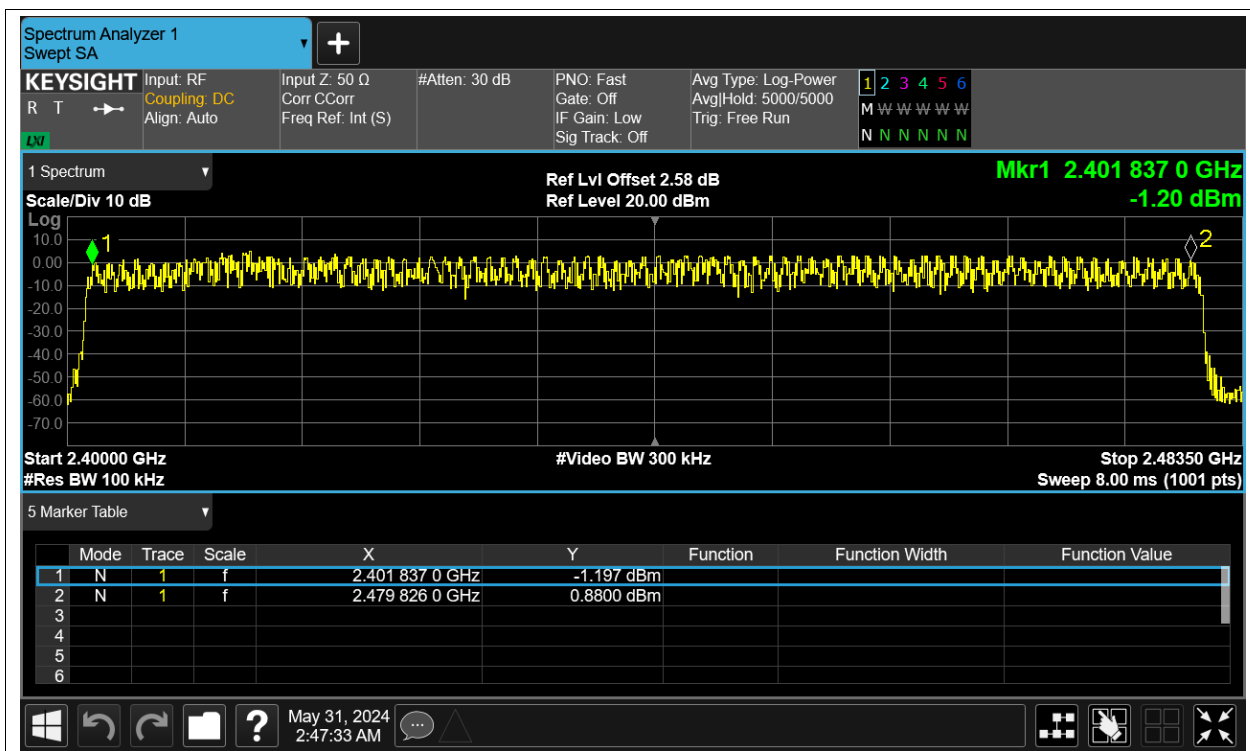


Dwell Time


Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	Ant1	0.376	120.32	31600	400	Pass
NVNT	1-DH3	2441	Ant1	1.634	261.44	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.882	307.413	31600	400	Pass
NVNT	2-DH1	2441	Ant1	0.385	123.2	31600	400	Pass
NVNT	2-DH3	2441	Ant1	1.63	260.8	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.88	307.2	31600	400	Pass
NVNT	3-DH1	2441	Ant1	0.386	123.52	31600	400	Pass
NVNT	3-DH3	2441	Ant1	1.636	261.76	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.886	307.84	31600	400	Pass

Test Graphs


Dwell NVNT 1-DH1 2441MHz Ant1

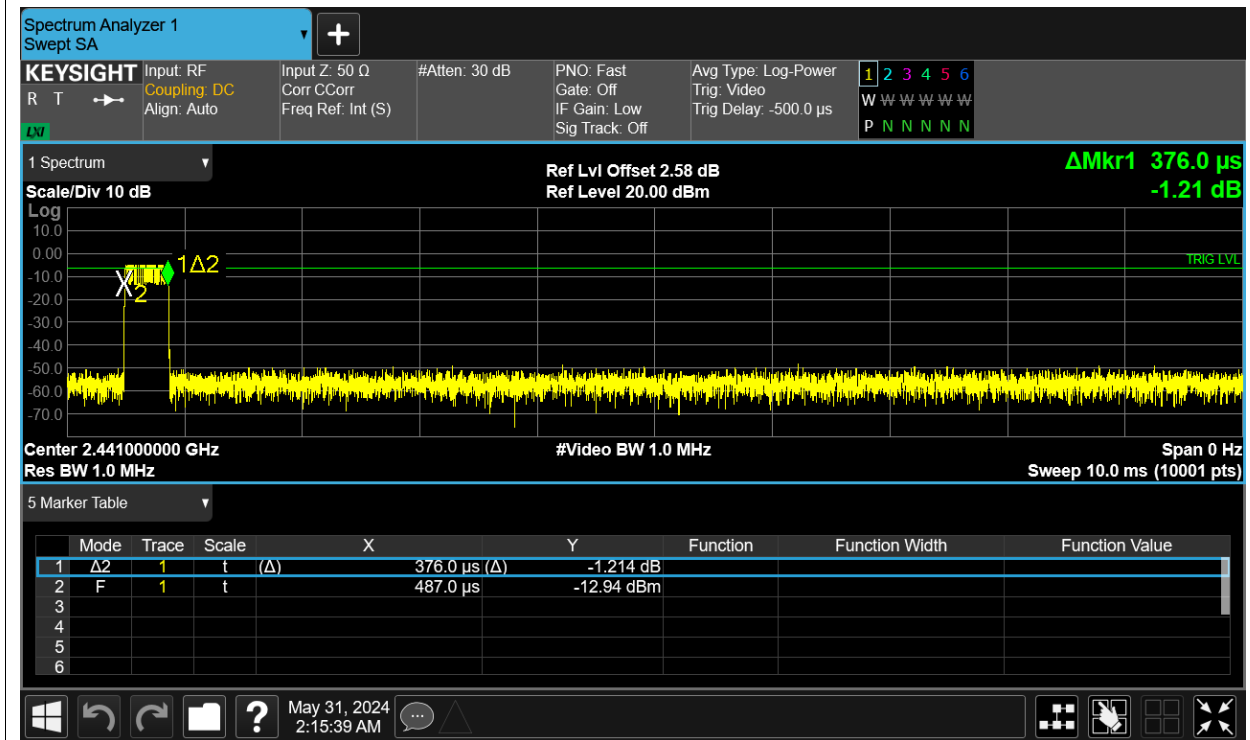


Dwell NVNT 1-DH3 2441MHz Ant1

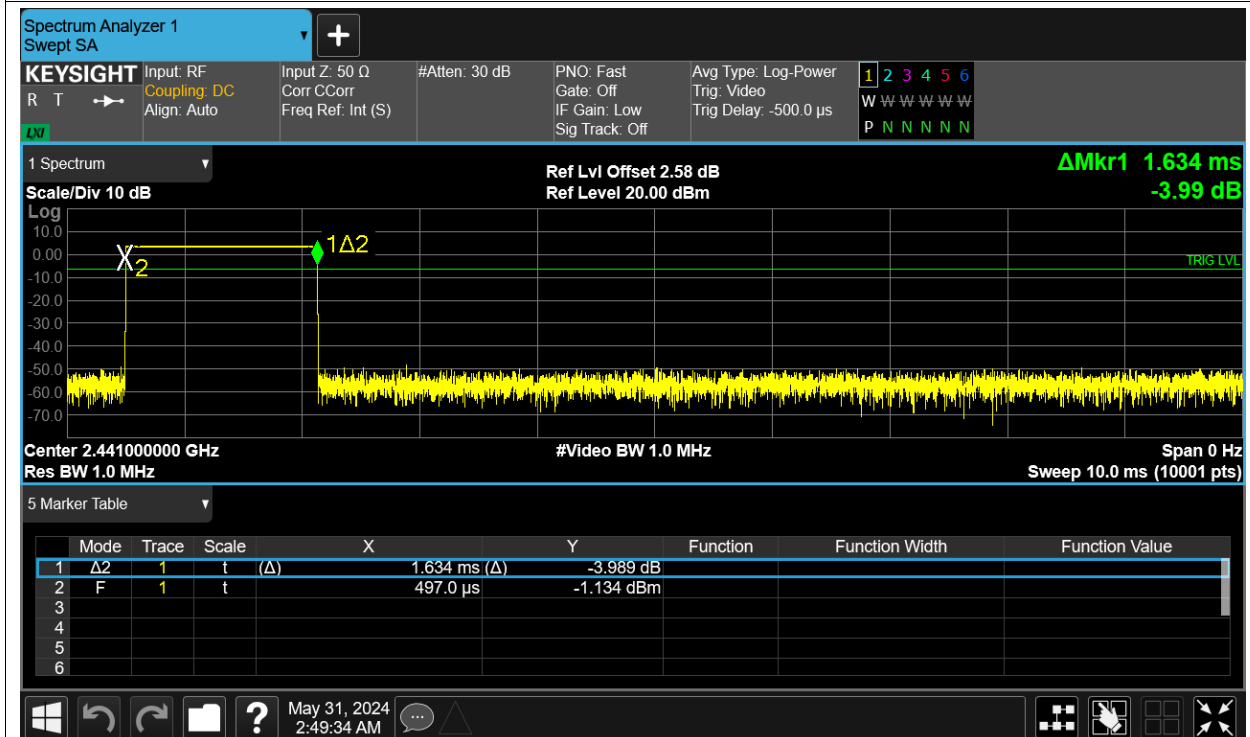


Dwell NVNT 1-DH5 2441MHz Ant1

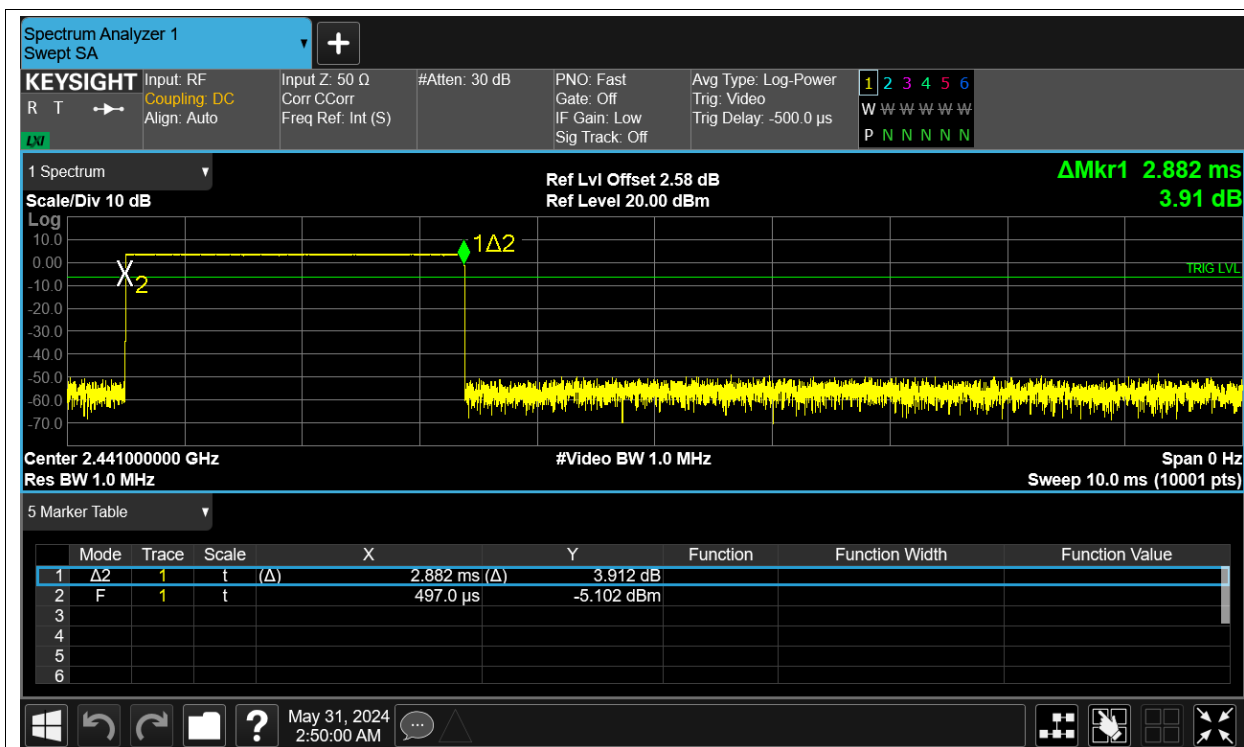


Dwell NVNT 2-DH1 2441MHz Ant1

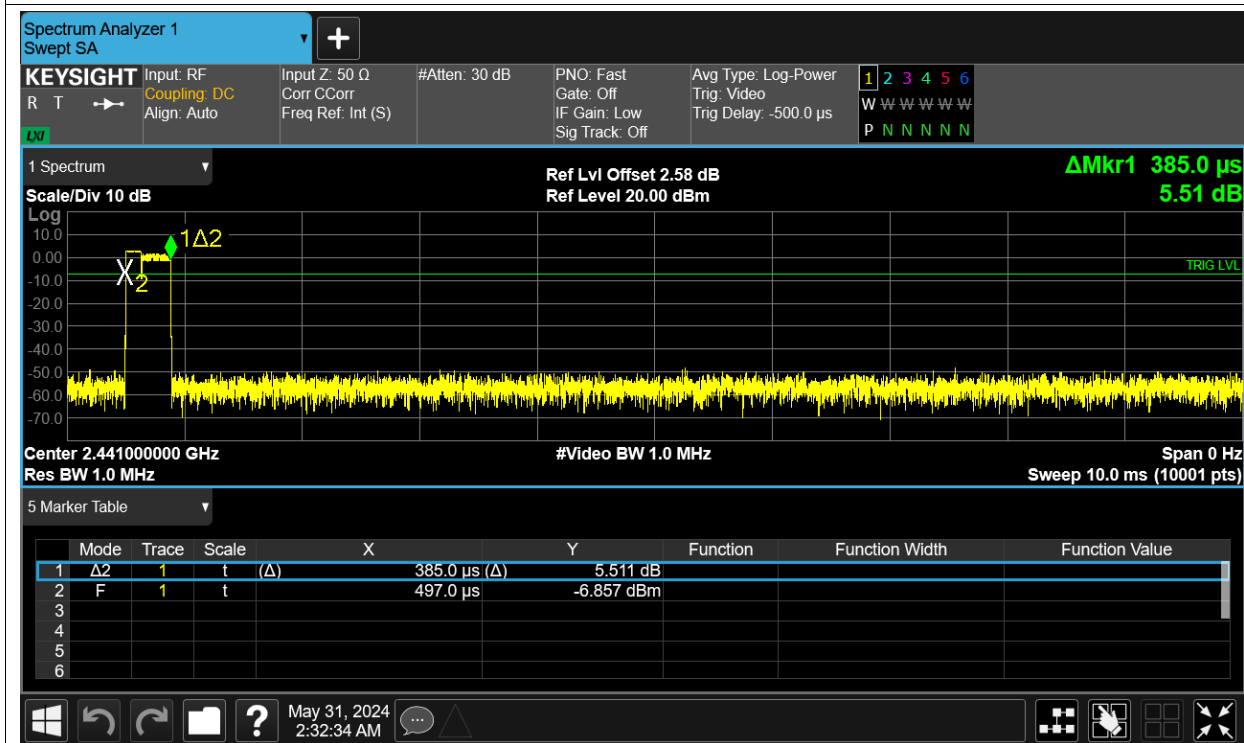


Dwell NVNT 2-DH3 2441MHz Ant1

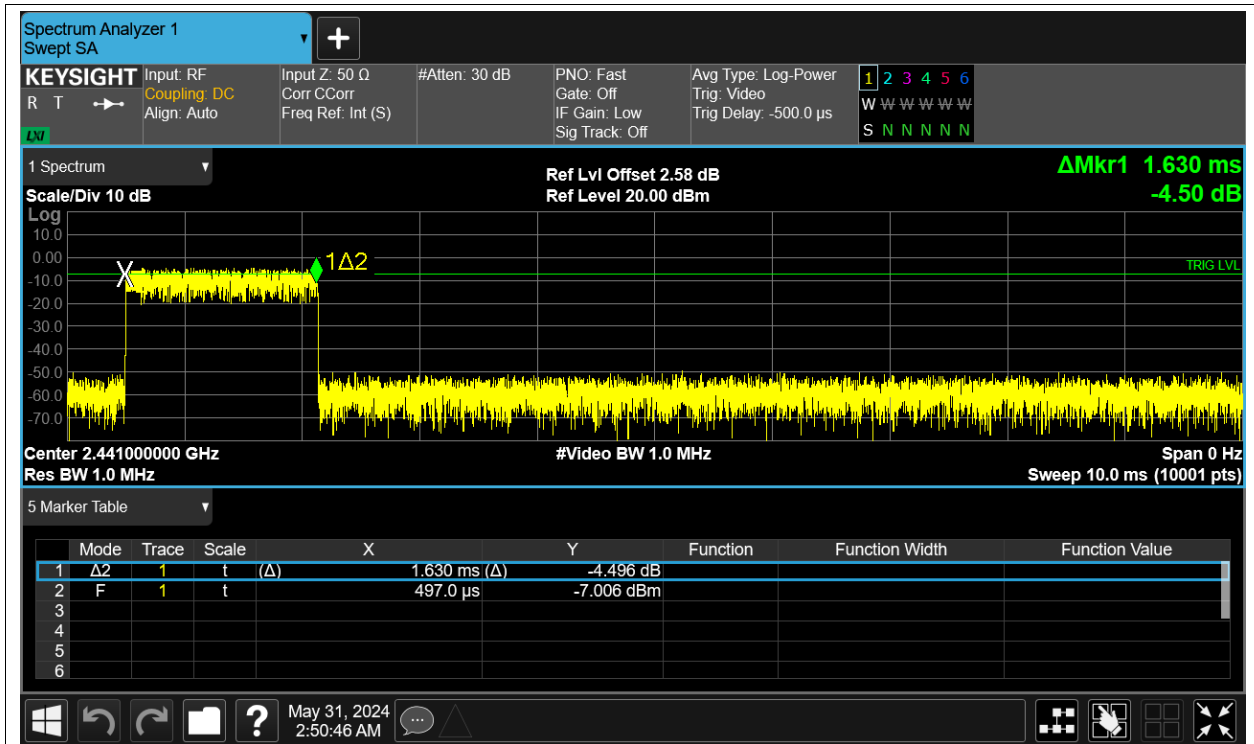


Dwell NVNT 2-DH5 2441MHz Ant1

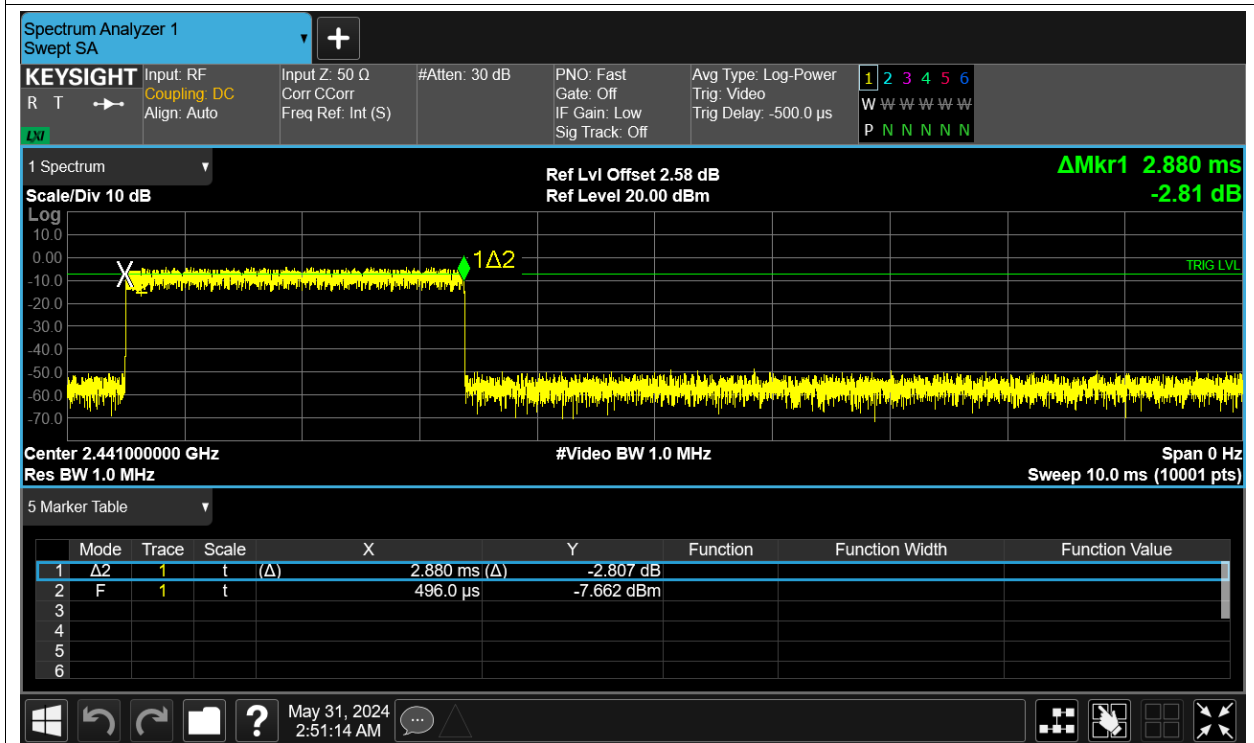

Dwell NVNT 3-DH1 2441MHz Ant1

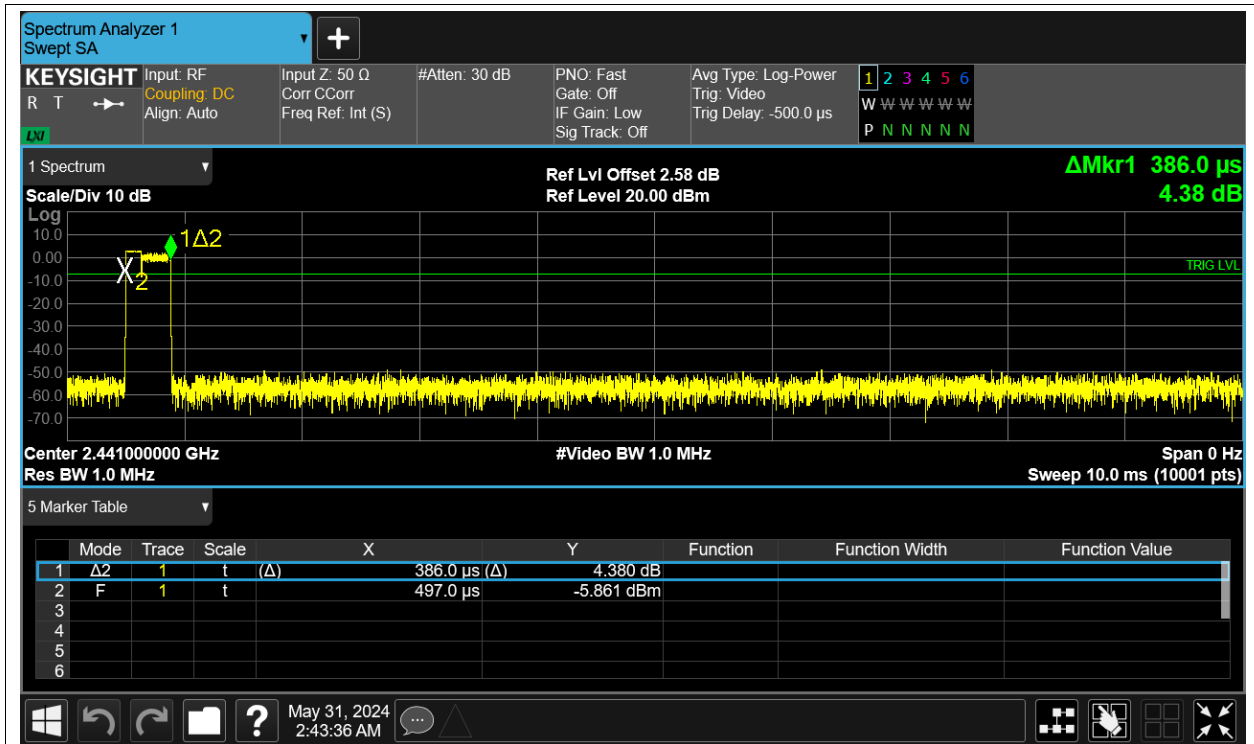

Dwell NVNT 3-DH3 2441MHz Ant1

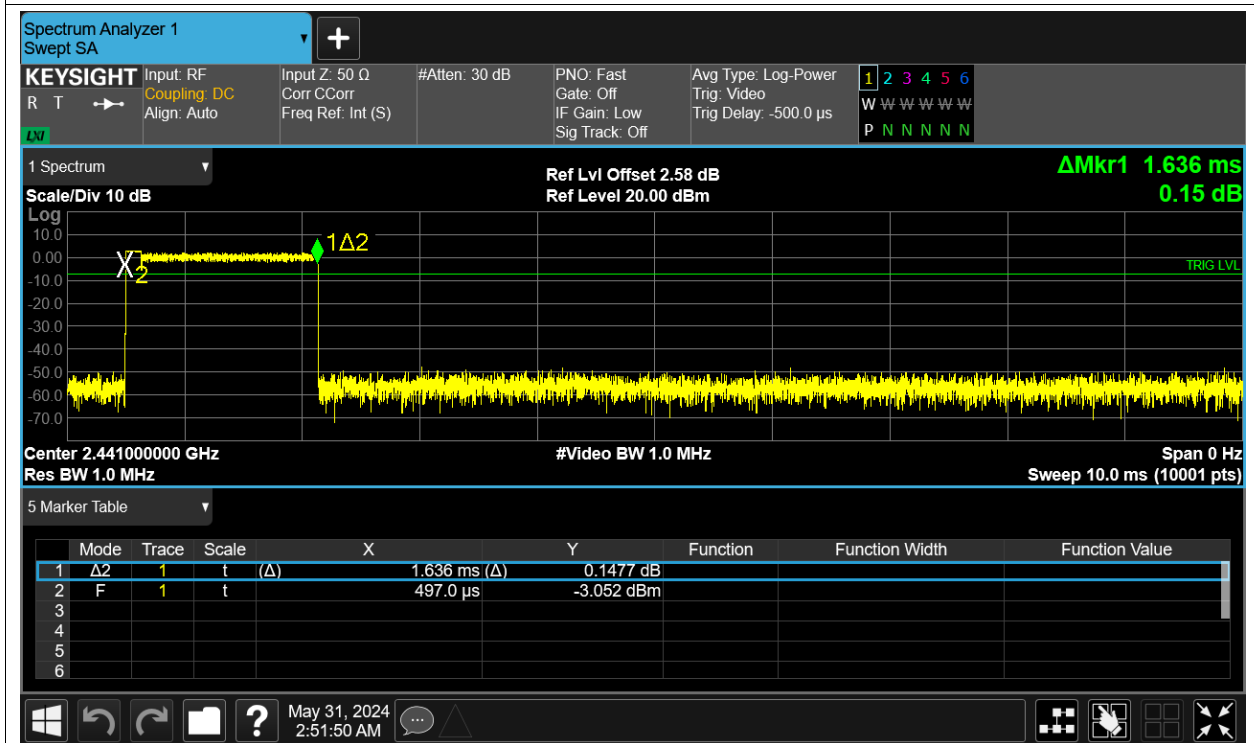

Dwell NVNT 3-DH5 2441MHz Ant1

