

7.12 Channel Move Time

Test Requirement KDB 905462 D02 Section 5.1
Test Method: KDB 905462 D02 Section 7.8.3

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.			

7.12.1 E.U.T. Operation


Operating Environment:

Temperature: 23 °C Humidity: 42 % RH Atmospheric Pressure: 1001 mbar

7.12.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	Normal operating_Keep the EUT communication with the companion device.

7.12.3 Test Setup Diagram

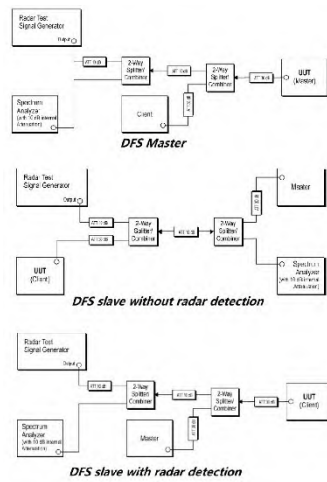

7.12.4 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details

7.13 Channel Closing Transmission Time

Test Requirement KDB 905462 D02 Section 5.1
Test Method: KDB 905462 D02 Section 7.8.3

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

7.13.1 E.U.T. Operation


Operating Environment:

Temperature: 23 °C Humidity: 42 % RH Atmospheric Pressure: 1001 mbar

7.13.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	Normal operating_Keep the EUT communication with the companion device.

7.13.3 Test Setup Diagram

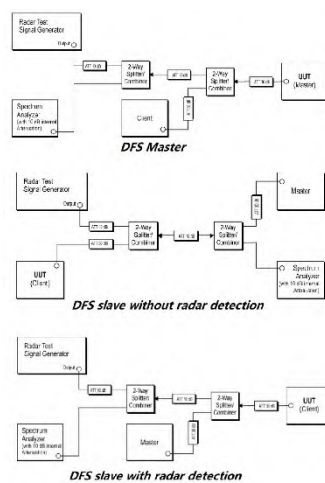

7.13.4 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details



Report No.: SUCR260800075305

Page: 207 of 332

8 Test Setup Photo

Refer to Appendix C.4 - Test Setup Photo for SUCR2608000753TL

9 EUT Constructional Details (EUT Photos)

Refer to Appendix C.1_External Photos for SUCR2608000753TL and Appendix C.2_Internal Photos for SUCR2608000753TL

10 Appendix

1. Duty Cycle

1.1 Test Result

1.1.1 Ant1

Ant1									
Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11a	SISO	5180	/	/	2.089	2.138	97.71	0.10	0.17
802.11n (HT20)	MIMO	5180	/	/	3.976	4.024	98.81	0.05	0.03
802.11n (HT40)	MIMO	5190	/	/	3.972	4.022	98.76	0.05	0.07
802.11ac (VHT20)	MIMO	5180	/	/	3.944	3.992	98.80	0.05	0.04
802.11ac (VHT40)	MIMO	5190	/	/	3.948	3.999	98.72	0.06	0.07
802.11ac (VHT80)	MIMO	5210	/	/	3.968	4.019	98.73	0.06	0.07
802.11ac (VHT160)	MIMO	5570	/	/	2.784	2.834	98.24	0.08	0.04
802.11ax (HEW20)	MIMO	5180	SU	/	3.979	4.028	98.78	0.05	0.07
802.11ax (HEW40)	MIMO	5190	SU	/	3.983	4.033	98.76	0.05	0.07
802.11ax (HEW80)	MIMO	5210	SU	/	3.983	4.035	98.71	0.06	0.07
802.11ax (HEW160)	MIMO	5570	SU	/	2.306	2.357	97.84	0.10	0.10

2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
						Result	Limit	
802.11a	SISO	5180	/	/	1	16.711	/	Pass
					2	16.696	/	Pass
		5200	/	/	1	16.655	/	Pass
					2	16.678	/	Pass
		5240	/	/	1	16.644	/	Pass
					2	16.632	/	Pass
		5260	/	/	1	16.648	/	Pass
					2	16.583	/	Pass
		5300	/	/	1	16.643	/	Pass
					2	16.641	/	Pass
		5320	/	/	1	16.681	/	Pass
					2	16.543	/	Pass
		5500	/	/	1	16.661	/	Pass
					2	16.649	/	Pass
		5580	/	/	1	16.695	/	Pass
					2	16.698	/	Pass
		5700	/	/	1	16.696	/	Pass
					2	16.718	/	Pass
		5745	/	/	1	16.629	/	Pass
					2	16.646	/	Pass
		5785	/	/	1	16.699	/	Pass
					2	16.642	/	Pass
802.11n (HT20)	MIMO	5180	/	/	1	17.778	/	Pass
					2	17.749	/	Pass
		5200	/	/	1	17.775	/	Pass
					2	17.683	/	Pass
		5240	/	/	1	17.810	/	Pass
					2	17.750	/	Pass
		5260	/	/	1	17.715	/	Pass
					2	17.742	/	Pass
		5300	/	/	1	17.760	/	Pass
					2	17.771	/	Pass
		5320	/	/	1	17.687	/	Pass
					2	17.718	/	Pass
		5500	/	/	1	17.741	/	Pass
					2	17.777	/	Pass
		5580	/	/	1	17.789	/	Pass
					2	17.778	/	Pass
		5700	/	/	1	17.749	/	Pass
					2	17.754	/	Pass

		5745	/	/	1	17.758	/	Pass
					2	17.710	/	Pass
		5785	/	/	1	17.855	/	Pass
					2	17.736	/	Pass
		5825	/	/	1	17.738	/	Pass
					2	17.705	/	Pass
802.11n (HT40)	MIMO	5190	/	/	1	36.134	/	Pass
					2	36.209	/	Pass
		5230	/	/	1	36.182	/	Pass
					2	36.229	/	Pass
		5270	/	/	1	36.175	/	Pass
					2	36.185	/	Pass
		5310	/	/	1	36.222	/	Pass
					2	36.165	/	Pass
		5510	/	/	1	36.200	/	Pass
					2	36.314	/	Pass
		5550	/	/	1	36.271	/	Pass
					2	36.259	/	Pass
		5670	/	/	1	36.308	/	Pass
					2	36.225	/	Pass
		5755	/	/	1	36.193	/	Pass
					2	36.194	/	Pass
		5795	/	/	1	36.211	/	Pass
					2	36.133	/	Pass
802.11ac (VHT20)	MIMO	5180	/	/	1	17.815	/	Pass
					2	17.785	/	Pass
		5200	/	/	1	17.780	/	Pass
					2	17.759	/	Pass
		5240	/	/	1	17.770	/	Pass
					2	17.708	/	Pass
		5260	/	/	1	17.736	/	Pass
					2	17.793	/	Pass
		5300	/	/	1	17.731	/	Pass
					2	17.724	/	Pass
		5320	/	/	1	17.702	/	Pass
					2	17.686	/	Pass
		5500	/	/	1	17.779	/	Pass
					2	17.766	/	Pass
		5580	/	/	1	17.843	/	Pass
					2	17.756	/	Pass
		5700	/	/	1	17.797	/	Pass
					2	17.772	/	Pass
		5745	/	/	1	17.824	/	Pass
					2	17.715	/	Pass
		5785	/	/	1	17.799	/	Pass
					2	17.722	/	Pass
		5825	/	/	1	17.762	/	Pass
					2	17.701	/	Pass
802.11ac (VHT40)	MIMO	5190	/	/	1	36.147	/	Pass
					2	36.313	/	Pass

		5230	/	/	1	36.156	/	Pass
					2	36.207	/	Pass
		5270	/	/	1	36.216	/	Pass
					2	36.246	/	Pass
		5310	/	/	1	36.204	/	Pass
					2	36.252	/	Pass
		5510	/	/	1	36.242	/	Pass
					2	36.201	/	Pass
		5550	/	/	1	36.219	/	Pass
					2	36.259	/	Pass
		5670	/	/	1	36.228	/	Pass
					2	36.189	/	Pass
802.11ac (VHT80)	MIMO	5210	/	/	1	75.085	/	Pass
					2	75.030	/	Pass
		5290	/	/	1	75.025	/	Pass
					2	74.946	/	Pass
		5530	/	/	1	75.200	/	Pass
					2	75.260	/	Pass
		5610	/	/	1	75.018	/	Pass
					2	74.910	/	Pass
		5775	/	/	1	75.088	/	Pass
					2	75.072	/	Pass
802.11ac (VHT160)	MIMO	5250	/	/	1	157.001	/	Pass
					2	156.663	/	Pass
		5570	/	/	1	153.374	/	Pass
					2	153.588	/	Pass

802.11ax (HEW20)	MIMO	5180	SU	/	1	18.973	/	Pass
					2	18.940	/	Pass
		5200	SU	/	1	18.910	/	Pass
					2	18.877	/	Pass
		5240	SU	/	1	18.914	/	Pass
					2	18.840	/	Pass
		5260	SU	/	1	18.881	/	Pass
					2	18.923	/	Pass
		5300	SU	/	1	18.897	/	Pass
					2	18.933	/	Pass
		5320	SU	/	1	18.855	/	Pass
					2	18.822	/	Pass
		5500	SU	/	1	18.846	/	Pass
					2	18.889	/	Pass
		5580	SU	/	1	18.893	/	Pass
					2	18.890	/	Pass
		5700	SU	/	1	18.893	/	Pass
					2	18.919	/	Pass
		5745	SU	/	1	18.899	/	Pass

					2	18.887	/	Pass
		5785	SU	/	1	18.936	/	Pass
					2	18.875	/	Pass
		5825	SU	/	1	18.950	/	Pass
2	18.901				/	Pass		
802.11ax (HEW40)	MIMO	5190	SU	/	1	37.628	/	Pass
					2	37.791	/	Pass
		5230	SU	/	1	37.591	/	Pass
					2	37.600	/	Pass
		5270	SU	/	1	37.763	/	Pass
					2	37.653	/	Pass
		5310	SU	/	1	37.653	/	Pass
					2	37.664	/	Pass
		5510	SU	/	1	37.647	/	Pass
					2	37.708	/	Pass
		5550	SU	/	1	37.689	/	Pass
					2	37.663	/	Pass
		5670	SU	/	1	37.739	/	Pass
					2	37.686	/	Pass
		5755	SU	/	1	37.633	/	Pass
					2	37.795	/	Pass
		5795	SU	/	1	37.642	/	Pass
					2	37.575	/	Pass
802.11ax (HEW80)	MIMO	5210	SU	/	1	76.648	/	Pass
					2	76.706	/	Pass
		5290	SU	/	1	76.557	/	Pass
					2	76.538	/	Pass
		5530	SU	/	1	76.704	/	Pass
					2	76.881	/	Pass
		5610	SU	/	1	76.497	/	Pass
					2	76.570	/	Pass
5775	SU	/	1	76.675	/	Pass		
			2	76.557	/	Pass		
802.11ax (HEW160)	MIMO	5250	SU	/	1	157.185	/	Pass
					2	156.838	/	Pass
		5570	SU	/	1	154.750	/	Pass
					2	154.654	/	Pass

2.1.2 26dB BW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	26dB Bandwidth (MHz)		Verdict
						Result	Limit	
802.11a	SISO	5180	/	/	1	22.882	/	Pass
					2	23.521	/	Pass
		5200	/	/	1	23.227	/	Pass
					2	24.127	/	Pass
		5240	/	/	1	23.129	/	Pass
					2	23.720	/	Pass
		5260	/	/	1	22.480	/	Pass
					2	22.617	/	Pass

		5300	/	/	1	23.304	/	Pass
					2	23.458	/	Pass
		5320	/	/	1	23.603	/	Pass
					2	22.296	/	Pass
		5500	/	/	1	23.674	/	Pass
					2	23.111	/	Pass
		5580	/	/	1	23.475	/	Pass
					2	23.129	/	Pass
		5700	/	/	1	23.353	/	Pass
					2	23.482	/	Pass
802.11n (HT20)	MIMO	5180	/	/	1	25.243	/	Pass
					2	23.360	/	Pass
		5200	/	/	1	23.950	/	Pass
					2	23.211	/	Pass
		5240	/	/	1	24.466	/	Pass
					2	23.810	/	Pass
		5260	/	/	1	23.779	/	Pass
					2	24.415	/	Pass
		5300	/	/	1	24.247	/	Pass
					2	23.568	/	Pass
		5320	/	/	1	23.443	/	Pass
					2	24.212	/	Pass
		5500	/	/	1	24.106	/	Pass
					2	23.952	/	Pass
		5580	/	/	1	23.657	/	Pass
					2	23.790	/	Pass
		5700	/	/	1	24.175	/	Pass
					2	24.421	/	Pass
802.11n (HT40)	MIMO	5190	/	/	1	43.963	/	Pass
					2	42.673	/	Pass
		5230	/	/	1	43.292	/	Pass
					2	42.804	/	Pass
		5270	/	/	1	43.337	/	Pass
					2	43.861	/	Pass
		5310	/	/	1	42.874	/	Pass
					2	42.308	/	Pass
		5510	/	/	1	43.599	/	Pass
					2	43.300	/	Pass
		5550	/	/	1	43.303	/	Pass
					2	43.290	/	Pass
802.11ac (VHT20)	MIMO	5180	/	/	1	24.107	/	Pass
					2	24.601	/	Pass
		5200	/	/	1	23.874	/	Pass
					2	23.681	/	Pass
		5240	/	/	1	24.606	/	Pass
					2	23.569	/	Pass
		5260	/	/	1	24.021	/	Pass
					2	23.995	/	Pass

		5300	/	/	1	23.839	/	Pass
					2	23.788	/	Pass
		5320	/	/	1	24.393	/	Pass
					2	23.855	/	Pass
		5500	/	/	1	23.388	/	Pass
					2	24.726	/	Pass
		5580	/	/	1	24.897	/	Pass
					2	23.725	/	Pass
		5700	/	/	1	23.803	/	Pass
					2	23.499	/	Pass
802.11ac (VHT40)	MIMO	5190	/	/	1	43.728	/	Pass
					2	44.447	/	Pass
		5230	/	/	1	42.273	/	Pass
					2	43.936	/	Pass
		5270	/	/	1	43.848	/	Pass
					2	42.960	/	Pass
		5310	/	/	1	43.227	/	Pass
					2	41.945	/	Pass
		5510	/	/	1	43.388	/	Pass
					2	42.487	/	Pass
		5550	/	/	1	42.799	/	Pass
					2	43.738	/	Pass
802.11ac (VHT80)	MIMO	5210	/	/	1	83.768	/	Pass
					2	86.077	/	Pass
		5290	/	/	1	83.766	/	Pass
					2	83.778	/	Pass
		5530	/	/	1	85.561	/	Pass
					2	86.056	/	Pass
		5610	/	/	1	84.847	/	Pass
					2	85.228	/	Pass
802.11ac (VHT160)	MIMO	5250	/	/	1	167.640	/	Pass
					2	167.287	/	Pass
		5570	/	/	1	162.466	/	Pass
					2	162.600	/	Pass

802.11ax (HEW20)	MIMO	5180	SU	/	1	24.130	/	Pass
					2	23.863	/	Pass
		5200	SU	/	1	23.249	/	Pass
					2	23.232	/	Pass
		5240	SU	/	1	23.528	/	Pass
					2	23.857	/	Pass
		5260	SU	/	1	23.356	/	Pass
					2	22.683	/	Pass
		5300	SU	/	1	23.539	/	Pass
					2	23.796	/	Pass
		5320	SU	/	1	22.587	/	Pass
					2	23.513	/	Pass
		5500	SU	/	1	23.814	/	Pass
					2	23.814	/	Pass

		5580	SU	/	2	24.193	/	Pass
					1	23.633	/	Pass
		5700	SU	/	2	23.470	/	Pass
					1	23.146	/	Pass
802.11ax (HEW40)	MIMO	5190	SU	/	2	23.700	/	Pass
					1	41.691	/	Pass
		5230	SU	/	2	43.638	/	Pass
					1	42.492	/	Pass
		5270	SU	/	2	41.568	/	Pass
					1	43.226	/	Pass
		5310	SU	/	2	42.595	/	Pass
					1	42.740	/	Pass
		5510	SU	/	2	41.970	/	Pass
					1	41.901	/	Pass
		5550	SU	/	2	42.548	/	Pass
					1	42.969	/	Pass
802.11ax (HEW80)	MIMO	5210	SU	/	2	44.211	/	Pass
					1	43.283	/	Pass
		5290	SU	/	2	42.674	/	Pass
					1	82.340	/	Pass
		5530	SU	/	2	82.844	/	Pass
					1	82.000	/	Pass
		5610	SU	/	2	82.009	/	Pass
					1	82.850	/	Pass
802.11ax (HEW160)	MIMO	5250	SU	/	2	84.989	/	Pass
					1	82.780	/	Pass
		5570	SU	/	2	82.371	/	Pass
					1	168.170	/	Pass
		5580	SU	/	2	166.881	/	Pass
					1	162.997	/	Pass
		5700	SU	/	2	163.704	/	Pass
					1	163.704	/	Pass


2.1.3 6dB BW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	6dB Bandwidth (MHz)		Verdict
						Result	Limit	
802.11a	SISO	5745	/	/	1	14.494	>=0.5	Pass
					2	16.306	>=0.5	Pass
		5785	/	/	1	15.511	>=0.5	Pass
					2	13.879	>=0.5	Pass
		5825	/	/	1	15.768	>=0.5	Pass
					2	15.079	>=0.5	Pass
802.11n (HT20)	MIMO	5745	/	/	1	15.075	>=0.5	Pass
					2	13.895	>=0.5	Pass
		5785	/	/	1	11.990	>=0.5	Pass
					2	15.348	>=0.5	Pass
		5825	/	/	1	15.743	>=0.5	Pass
					2	15.401	>=0.5	Pass
802.11n (HT40)	MIMO	5755	/	/	1	28.216	>=0.5	Pass
					2	32.486	>=0.5	Pass


		5795	/	/	1	31.295	≥ 0.5	Pass
					2	26.997	≥ 0.5	Pass
802.11ac (VHT20)	MIMO	5745	/	/	1	17.292	≥ 0.5	Pass
					2	15.508	≥ 0.5	Pass
		5785	/	/	1	15.818	≥ 0.5	Pass
					2	15.269	≥ 0.5	Pass
		5825	/	/	1	15.011	≥ 0.5	Pass
					2	15.056	≥ 0.5	Pass
802.11ac (VHT40)	MIMO	5755	/	/	1	30.392	≥ 0.5	Pass
					2	31.956	≥ 0.5	Pass
		5795	/	/	1	33.772	≥ 0.5	Pass
					2	35.038	≥ 0.5	Pass
802.11ac (VHT80)	MIMO	5775	/	/	1	61.388	≥ 0.5	Pass
					2	68.847	≥ 0.5	Pass
802.11ax (HEW20)	MIMO	5745	SU	/	1	15.068	≥ 0.5	Pass
					2	15.496	≥ 0.5	Pass
		5785	SU	/	1	16.310	≥ 0.5	Pass
					2	16.223	≥ 0.5	Pass
		5825	SU	/	1	17.516	≥ 0.5	Pass
					2	12.607	≥ 0.5	Pass
802.11ax (HEW40)	MIMO	5755	SU	/	1	35.404	≥ 0.5	Pass
					2	27.452	≥ 0.5	Pass
		5795	SU	/	1	35.522	≥ 0.5	Pass
					2	32.609	≥ 0.5	Pass
802.11ax (HEW80)	MIMO	5775	SU	/	1	68.780	≥ 0.5	Pass
					2	55.128	≥ 0.5	Pass

2.2 Test Graph


2.2.1 OBW

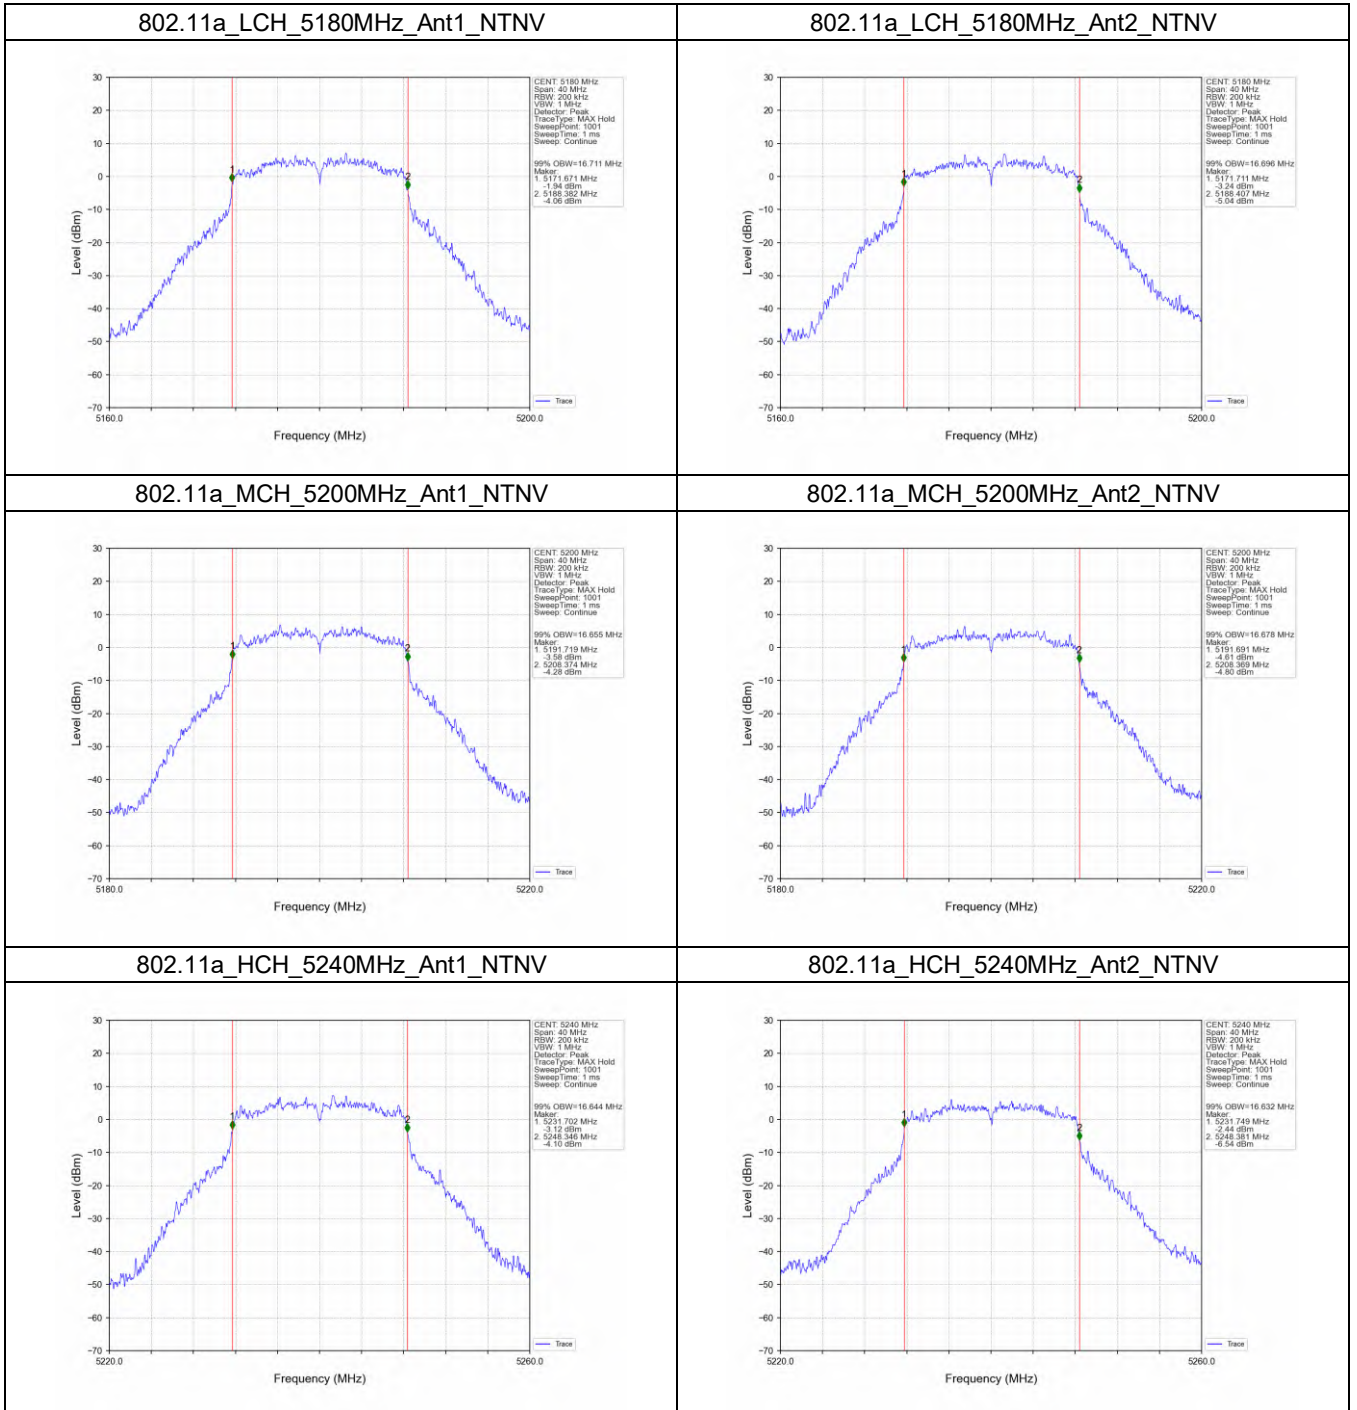


802.11a_LCH_5260MHz_Ant1_NTNV

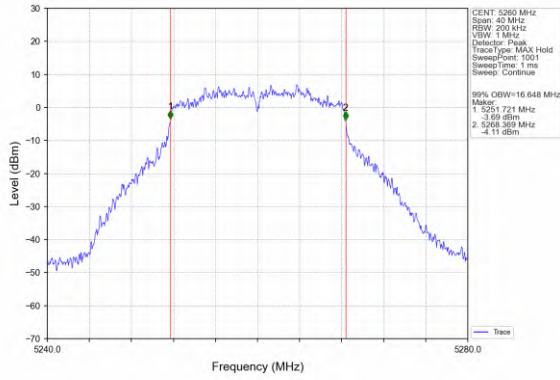


802.11a_LCH_5260MHz_Ant2_NTNV

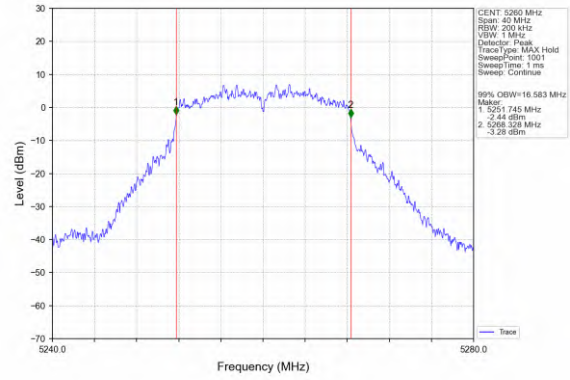


802.11a_MCH_5300MHz_Ant1_NTNV

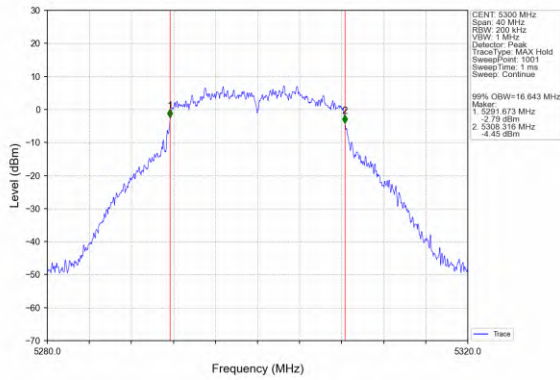


802.11a_MCH_5300MHz_Ant2_NTNV

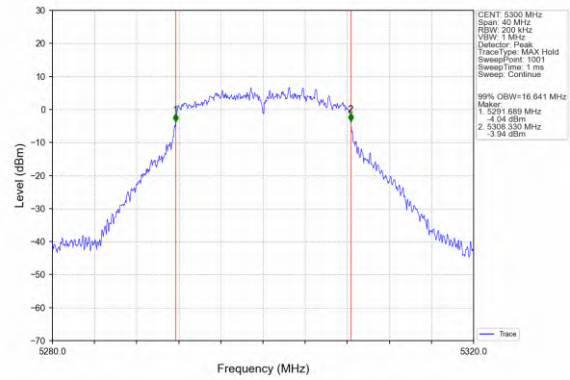


802.11a_HCH_5320MHz_Ant1_NTNV

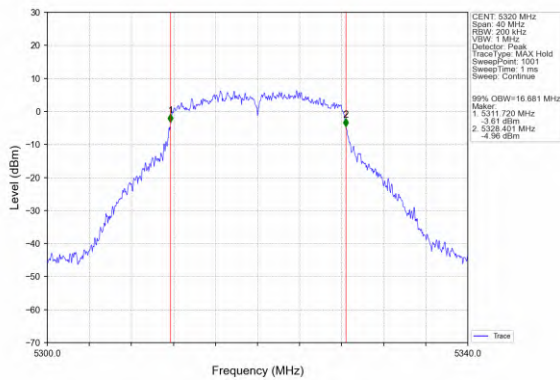


802.11a_HCH_5320MHz_Ant2_NTNV

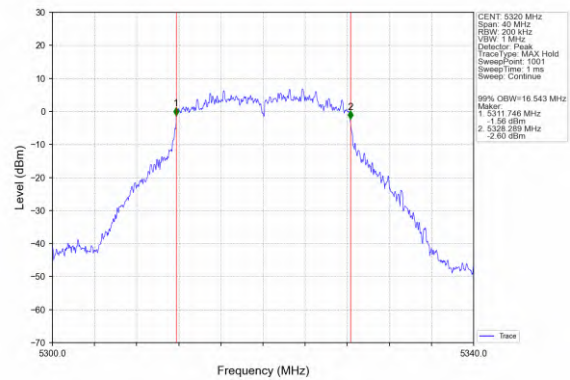


802.11a_LCH_5500MHz_Ant1_NTNV

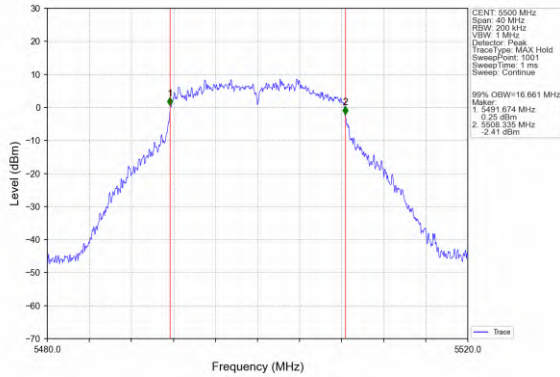


802.11a_LCH_5500MHz_Ant2_NTNV

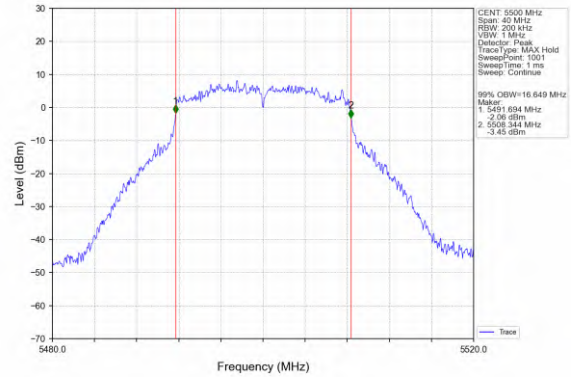


802.11a_MCH_5580MHz_Ant1_NTNV

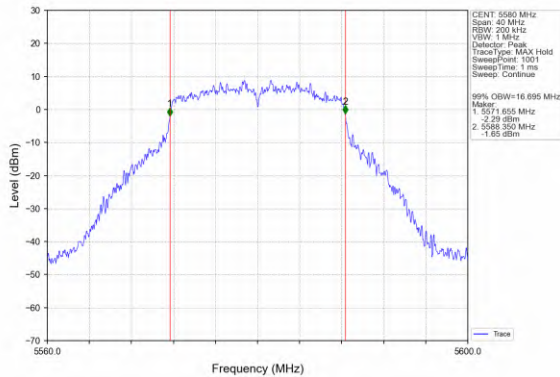


802.11a_MCH_5580MHz_Ant2_NTNV

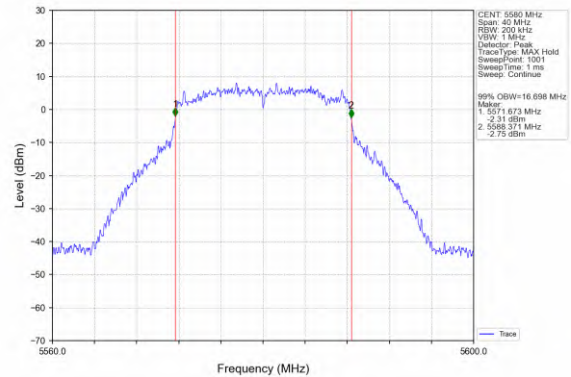


802.11a_HCH_5700MHz_Ant1_NTNV

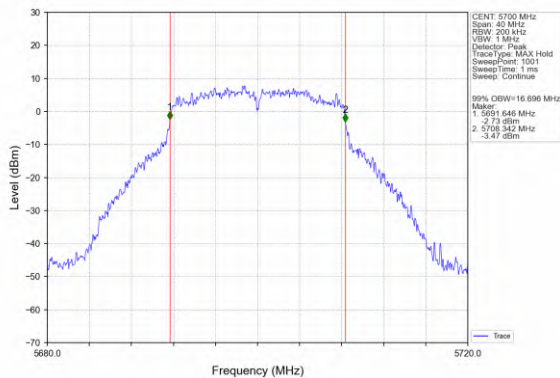


802.11a_HCH_5700MHz_Ant2_NTNV

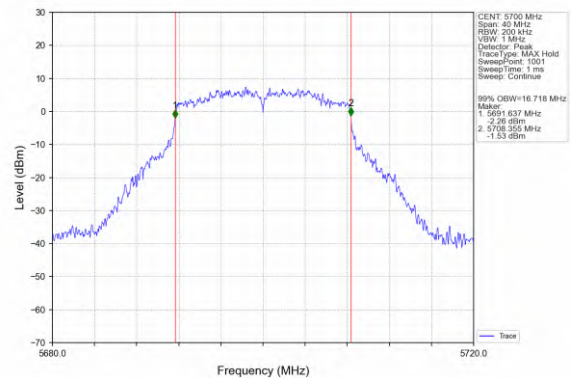


802.11a_LCH_5745MHz_Ant1_NTNV

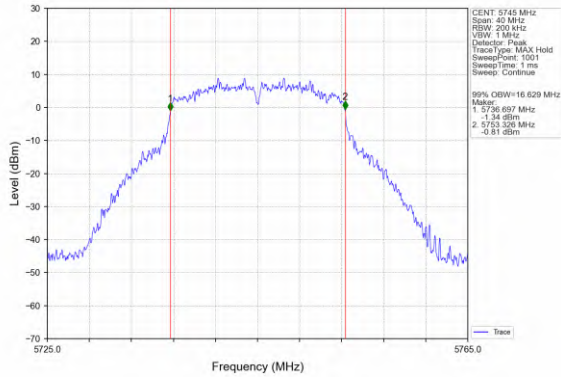


802.11a_LCH_5745MHz_Ant2_NTNV

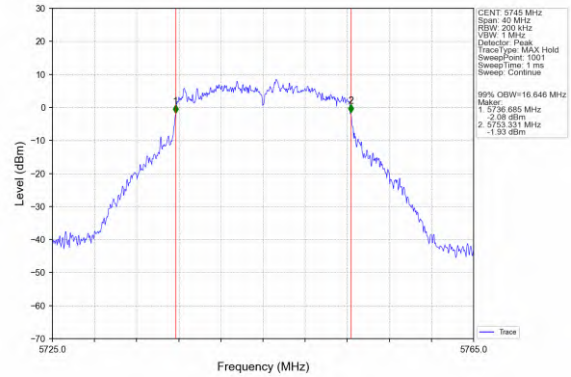


802.11a_MCH_5785MHz_Ant1_NTNV

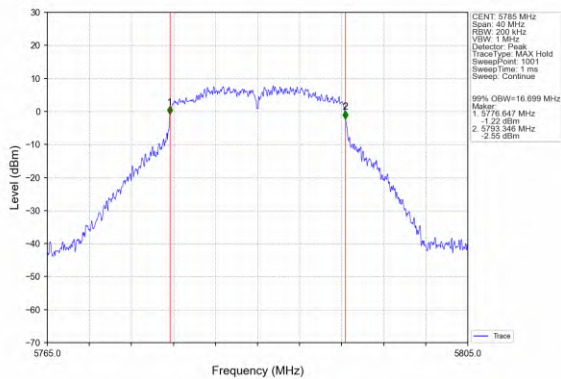


802.11a_MCH_5785MHz_Ant2_NTNV

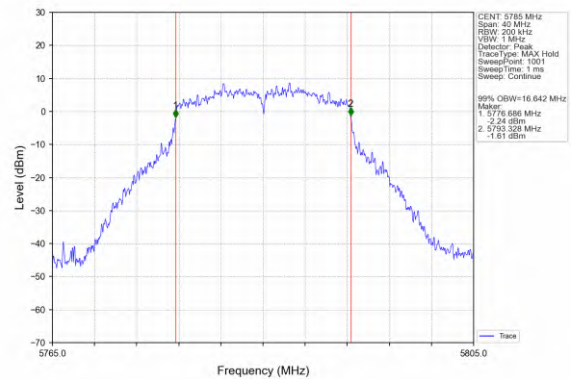


802.11a_HCH_5825MHz_Ant1_NTNV

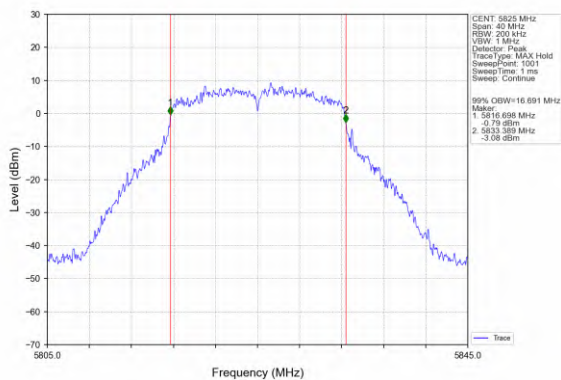


802.11a_HCH_5825MHz_Ant2_NTNV

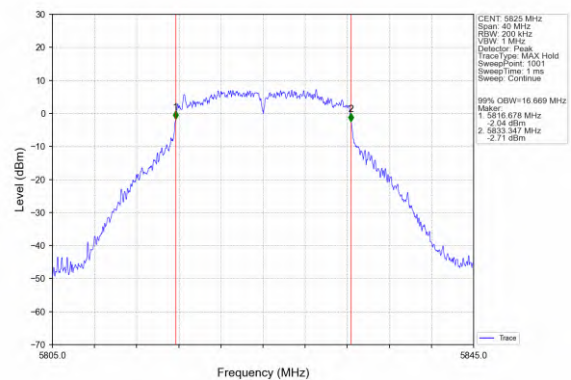


802.11n(HT20)_LCH_5180MHz_Ant1_NTNV

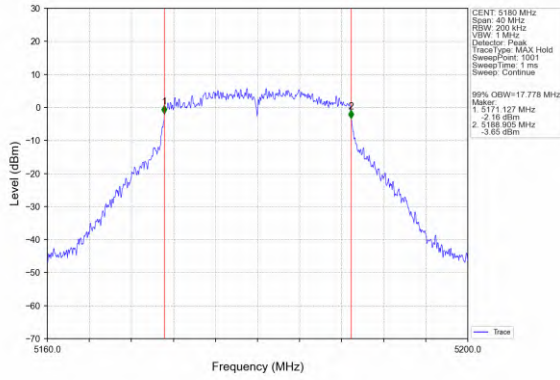


802.11n(HT20)_LCH_5180MHz_Ant2_NTNV

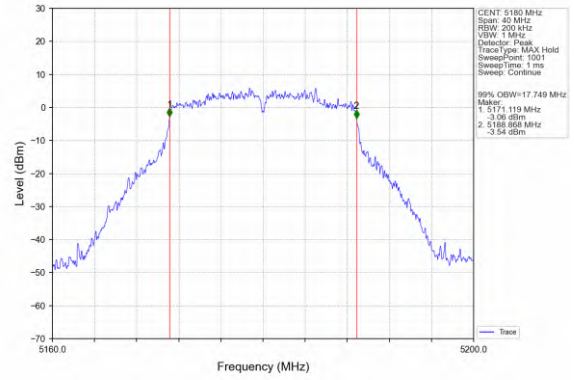


802.11n(HT20)_MCH_5200MHz_Ant1_NTNV

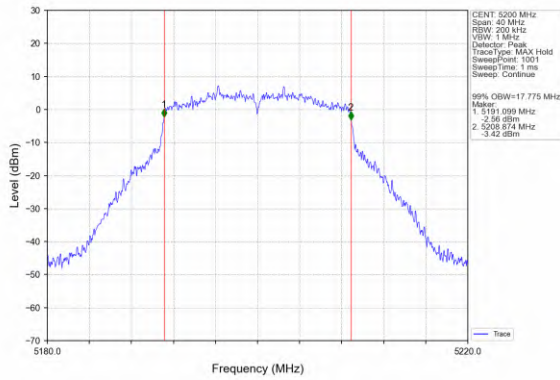


802.11n(HT20)_MCH_5200MHz_Ant2_NTNV

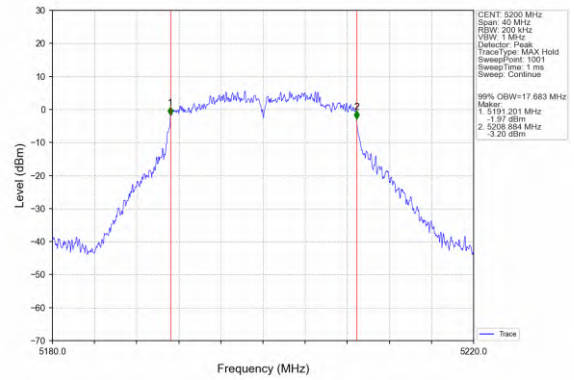


802.11n(HT20)_HCH_5240MHz_Ant1_NTNV

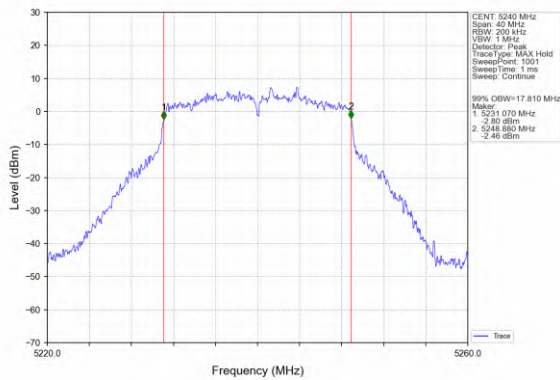


802.11n(HT20)_HCH_5240MHz_Ant2_NTNV

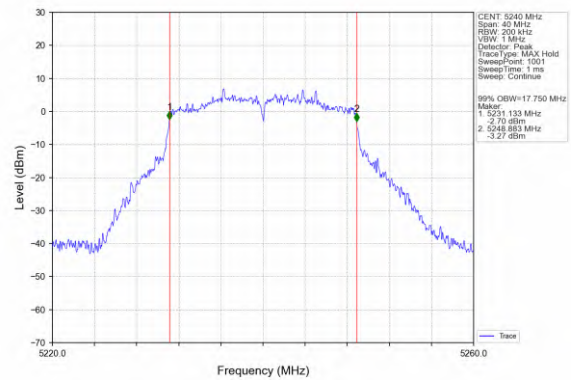


802.11n(HT20)_LCH_5260MHz_Ant1_NTNV

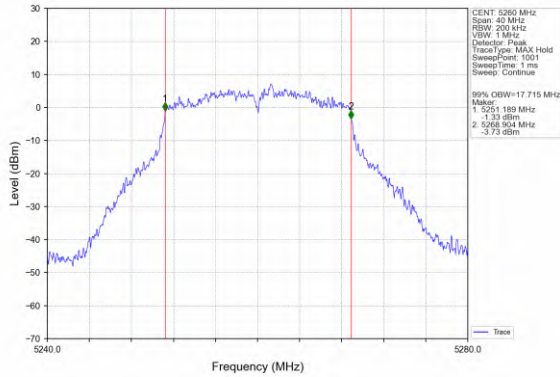


802.11n(HT20)_LCH_5260MHz_Ant2_NTNV

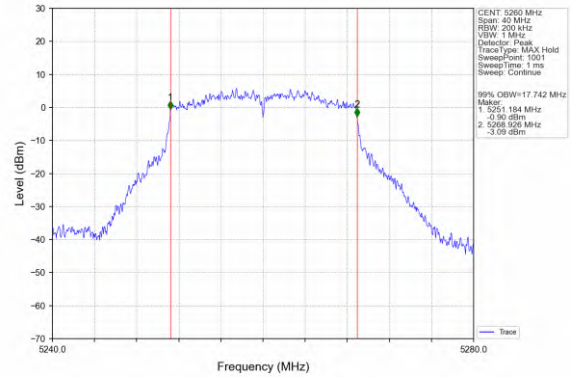


802.11n(HT20)_MCH_5300MHz_Ant1_NTNV

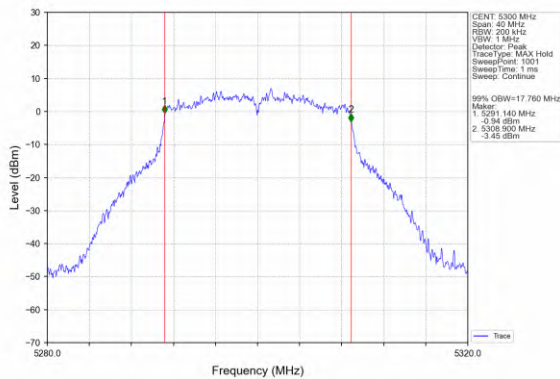


802.11n(HT20)_MCH_5300MHz_Ant2_NTNV

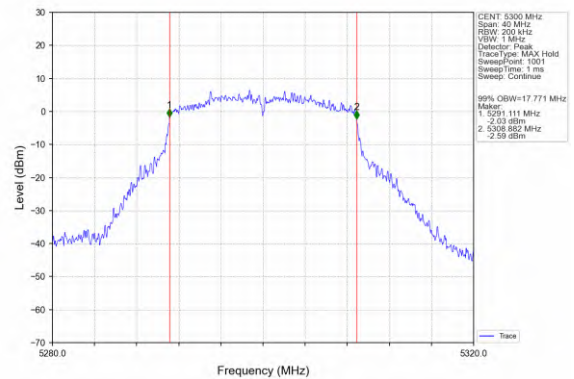


802.11n(HT20)_HCH_5320MHz_Ant1_NTNV

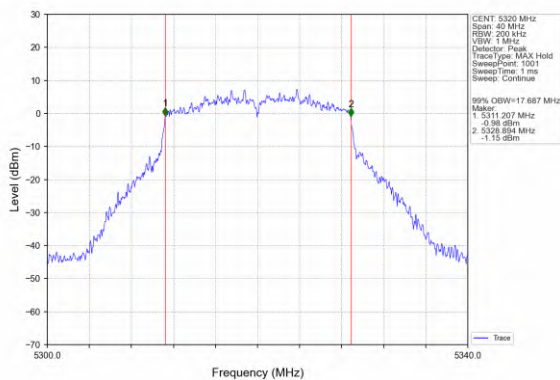


802.11n(HT20)_HCH_5320MHz_Ant2_NTNV

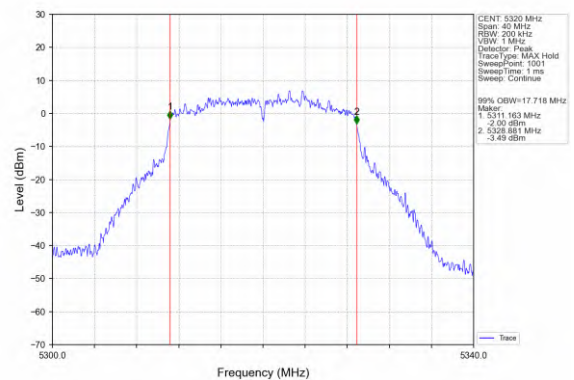


802.11n(HT20)_LCH_5500MHz_Ant1_NTNV

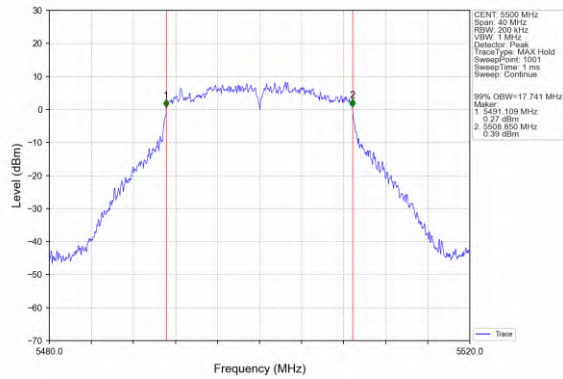


802.11n(HT20)_LCH_5500MHz_Ant2_NTNV

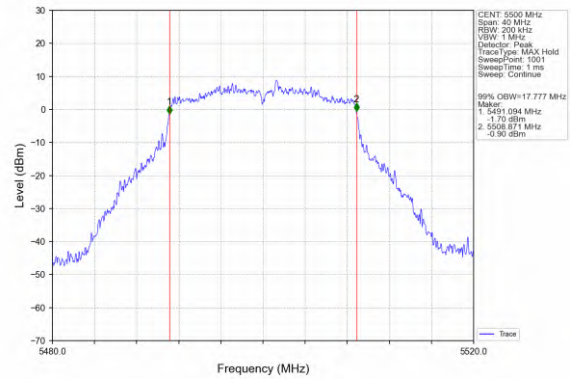


802.11n(HT20)_MCH_5580MHz_Ant1_NTNV

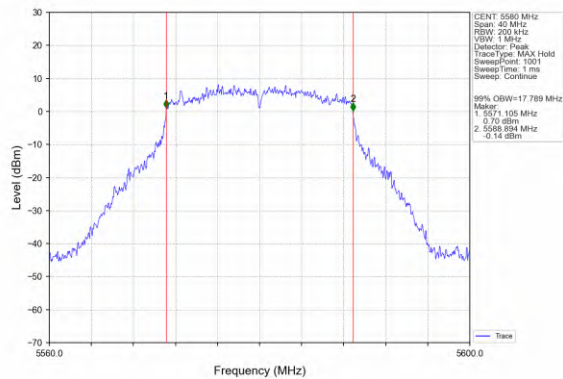


802.11n(HT20)_MCH_5580MHz_Ant2_NTNV

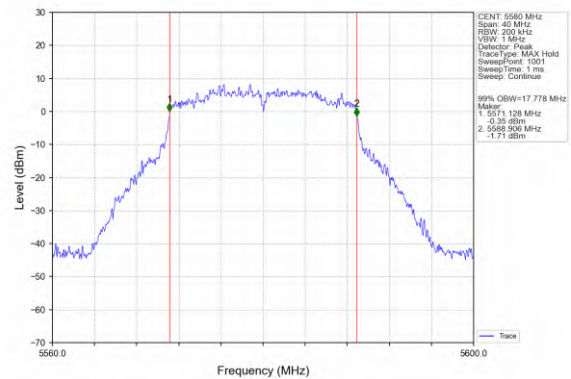


802.11n(HT20)_HCH_5700MHz_Ant1_NTNV

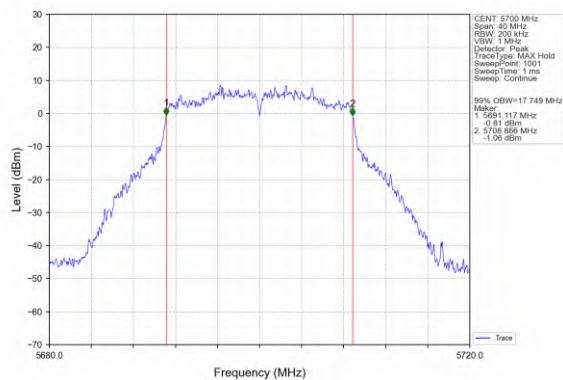


802.11n(HT20)_HCH_5700MHz_Ant2_NTNV

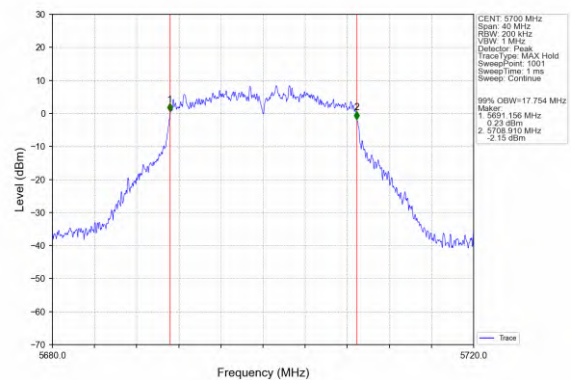


802.11n(HT20)_LCH_5745MHz_Ant1_NTNV

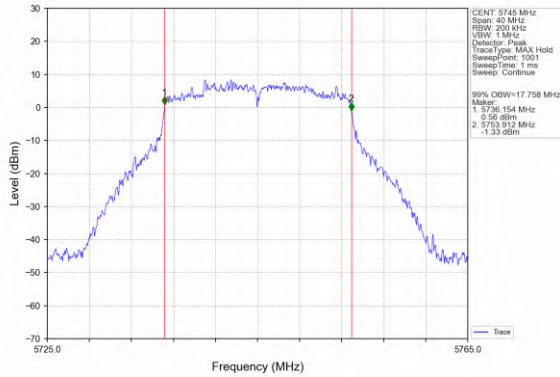


802.11n(HT20)_LCH_5745MHz_Ant2_NTNV

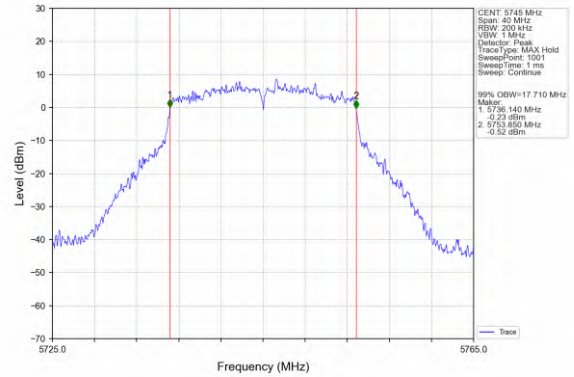


802.11n(HT20)_MCH_5785MHz_Ant1_NTNV

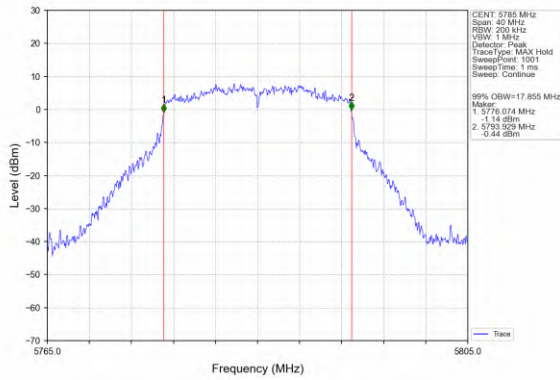


802.11n(HT20)_MCH_5785MHz_Ant2_NTNV

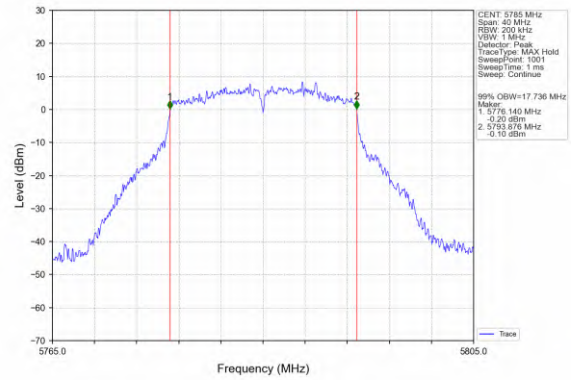


802.11n(HT20)_HCH_5825MHz_Ant1_NTNV

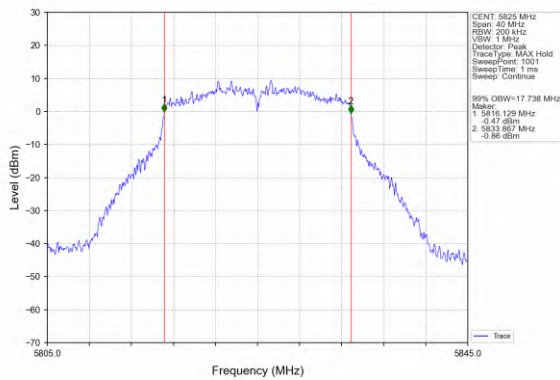


802.11n(HT20)_HCH_5825MHz_Ant2_NTNV

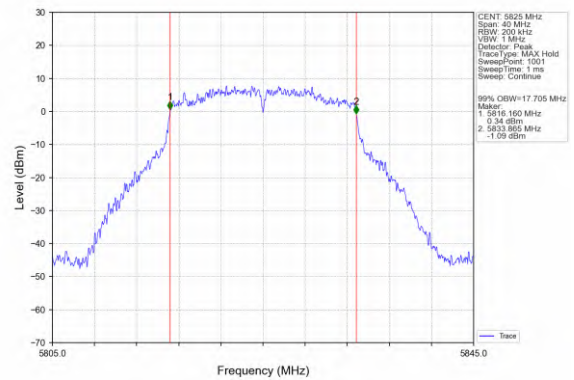


802.11n(HT40)_LCH_5190MHz_Ant1_NTNV

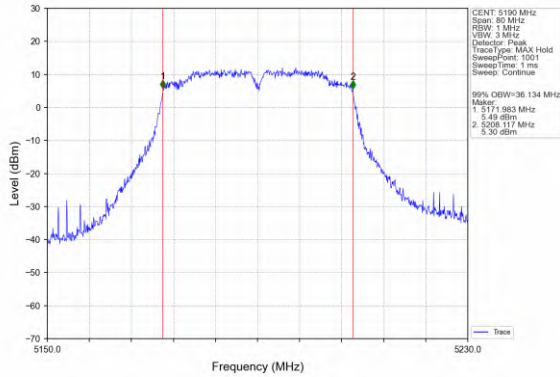


802.11n(HT40)_LCH_5190MHz_Ant2_NTNV

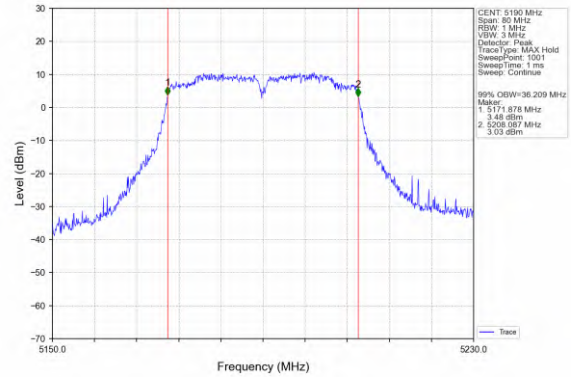


802.11n(HT40)_HCH_5230MHz_Ant1_NTNV

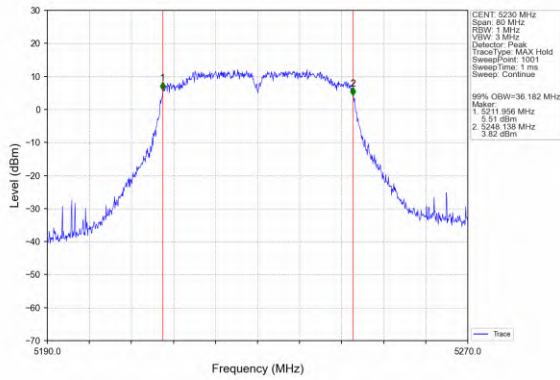


802.11n(HT40)_HCH_5230MHz_Ant2_NTNV

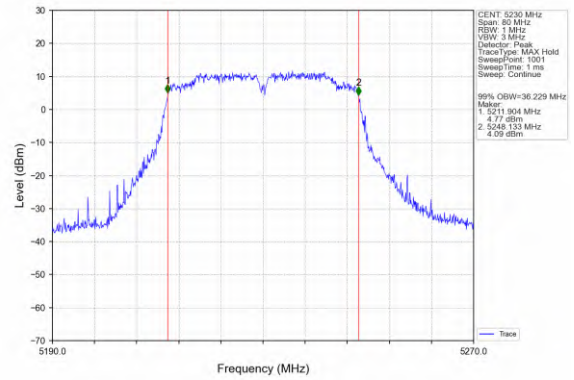


802.11n(HT40)_LCH_5270MHz_Ant1_NTNV

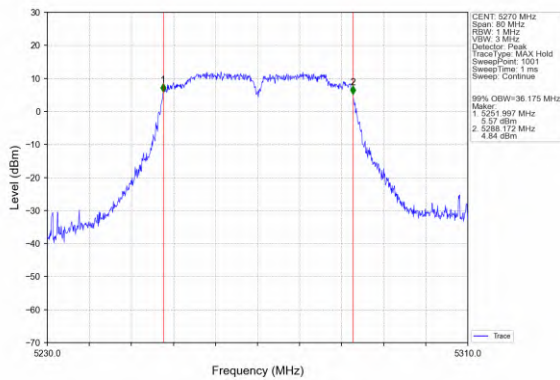


802.11n(HT40)_LCH_5270MHz_Ant2_NTNV

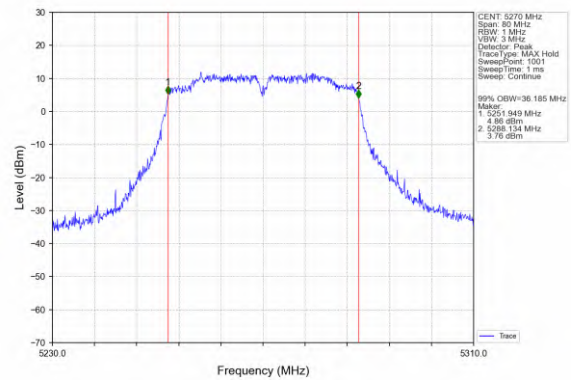


802.11n(HT40)_HCH_5310MHz_Ant1_NTNV

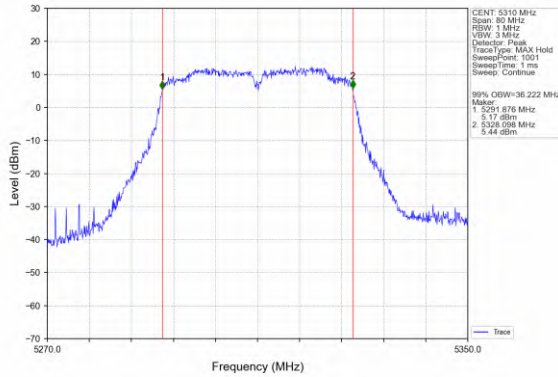


802.11n(HT40)_HCH_5310MHz_Ant2_NTNV

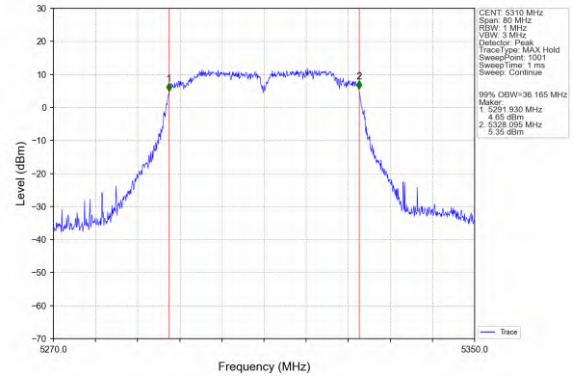


802.11n(HT40)_LCH_5510MHz_Ant1_NTNV

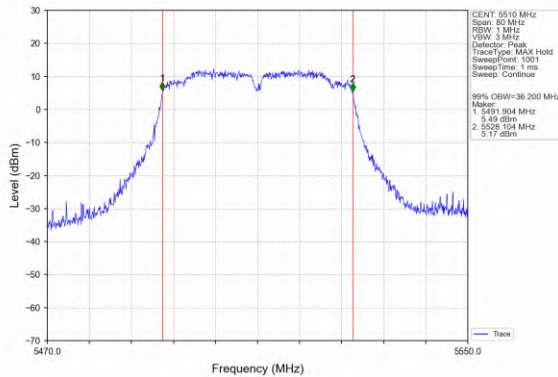


802.11n(HT40)_LCH_5510MHz_Ant2_NTNV

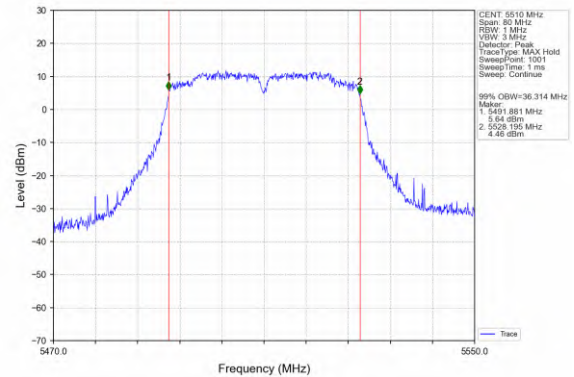


802.11n(HT40)_MCH_5550MHz_Ant1_NTNV

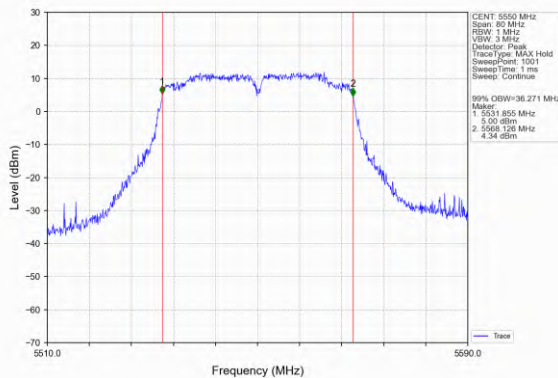


802.11n(HT40)_MCH_5550MHz_Ant2_NTNV

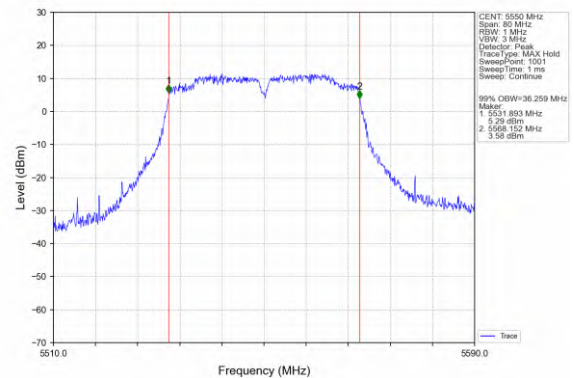


802.11n(HT40)_HCH_5670MHz_Ant1_NTNV

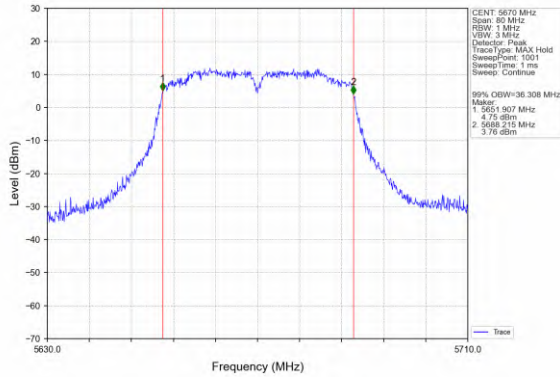


802.11n(HT40)_HCH_5670MHz_Ant2_NTNV

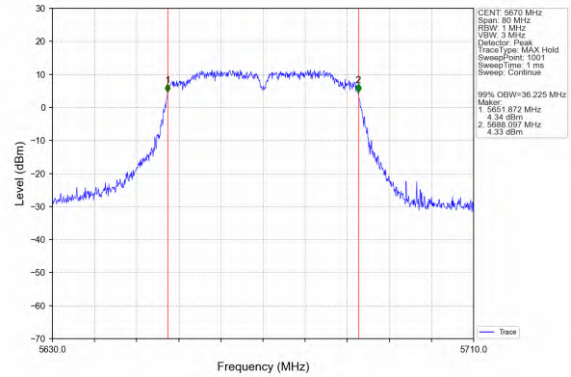


802.11n(HT40)_LCH_5755MHz_Ant1_NTNV

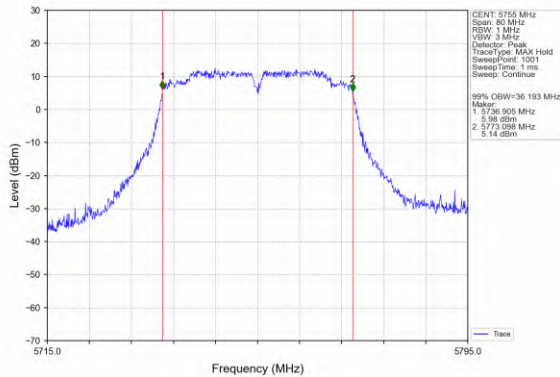


802.11n(HT40)_LCH_5755MHz_Ant2_NTNV

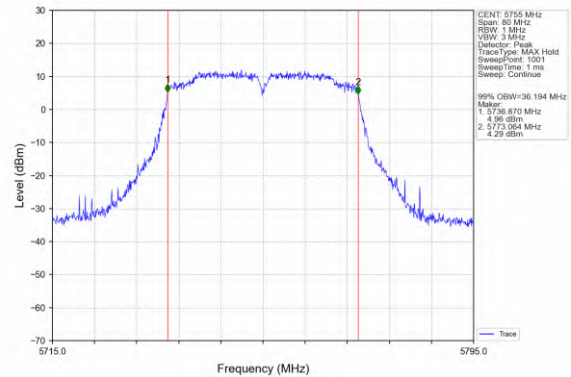


802.11n(HT40)_HCH_5795MHz_Ant1_NTNV

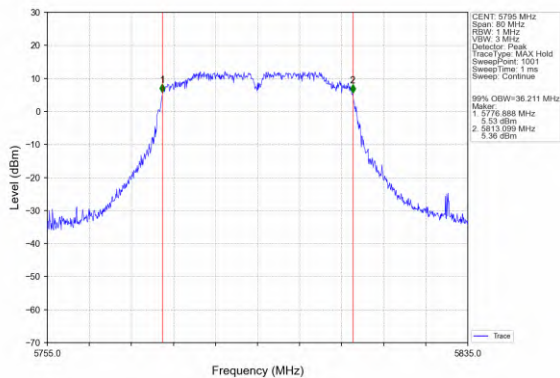


802.11n(HT40)_HCH_5795MHz_Ant2_NTNV

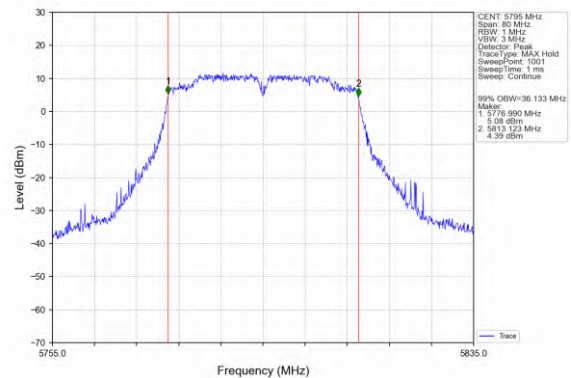


802.11ac(VHT20)_LCH_5180MHz_Ant1_NTNV

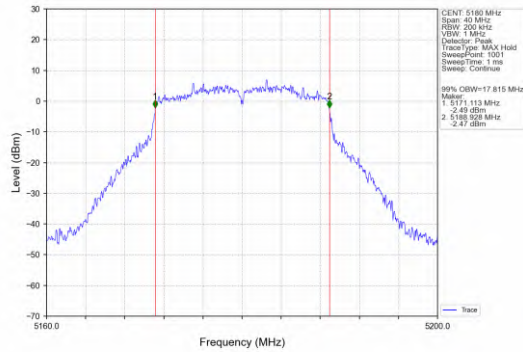


802.11ac(VHT20)_LCH_5180MHz_Ant2_NTNV

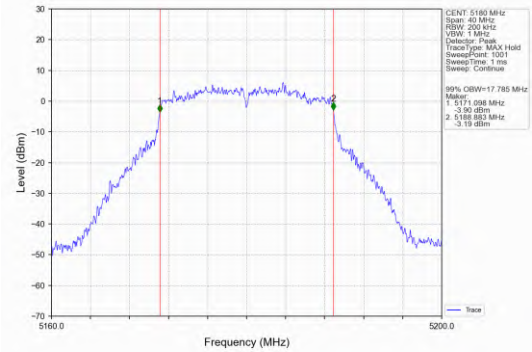


802.11ac(VHT20)_MCH_5200MHz_Ant1_NTNV

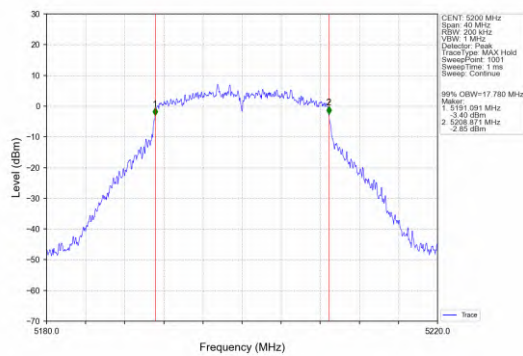


802.11ac(VHT20)_MCH_5200MHz_Ant2_NTNV

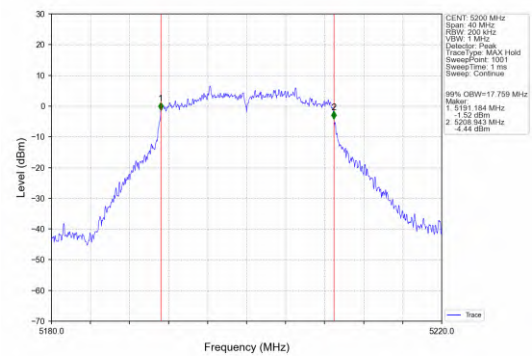


802.11ac(VHT20)_HCH_5240MHz_Ant1_NTNV

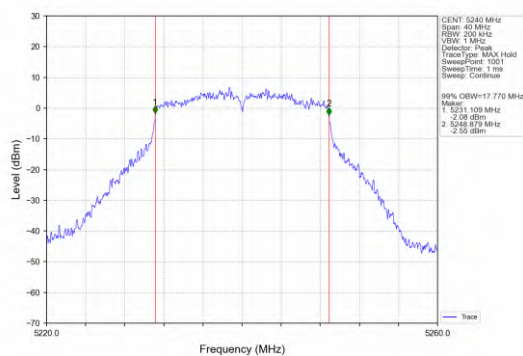


802.11ac(VHT20)_HCH_5240MHz_Ant2_NTNV

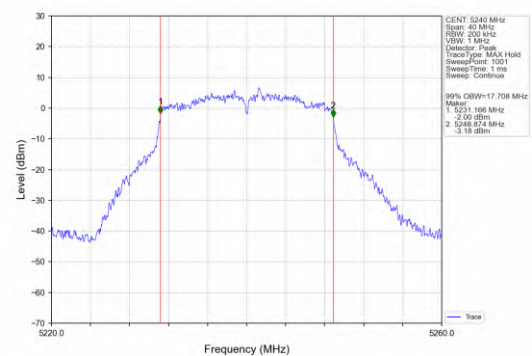


802.11ac(VHT20)_LCH_5260MHz_Ant1_NTNV

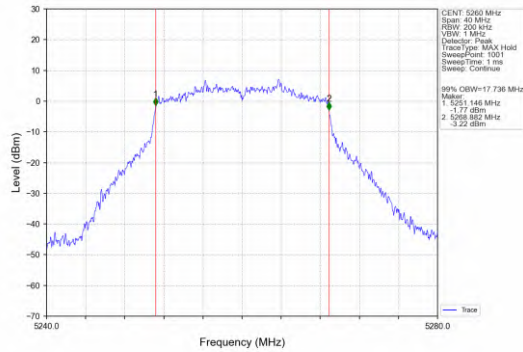


802.11ac(VHT20)_LCH_5260MHz_Ant2_NTNV

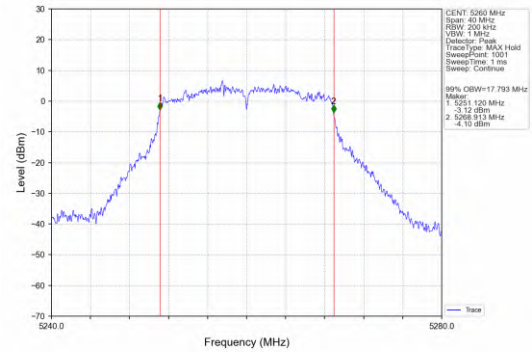


802.11ac(VHT20)_MCH_5300MHz_Ant1_NTNV

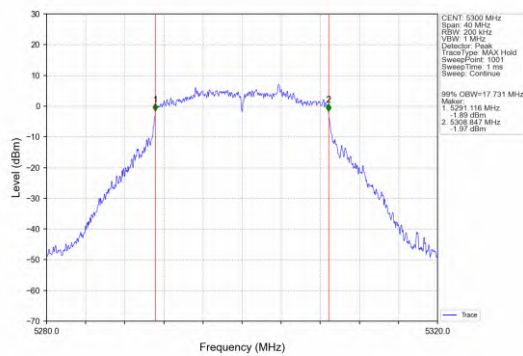


802.11ac(VHT20)_MCH_5300MHz_Ant2_NTNV

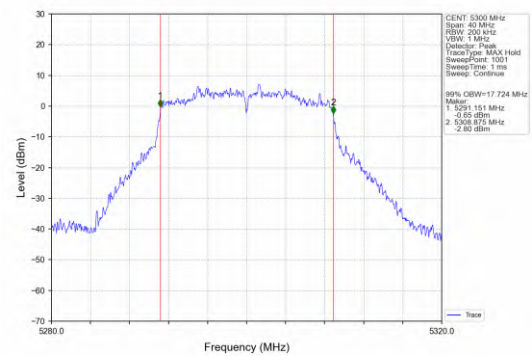


802.11ac(VHT20)_HCH_5320MHz_Ant1_NTNV

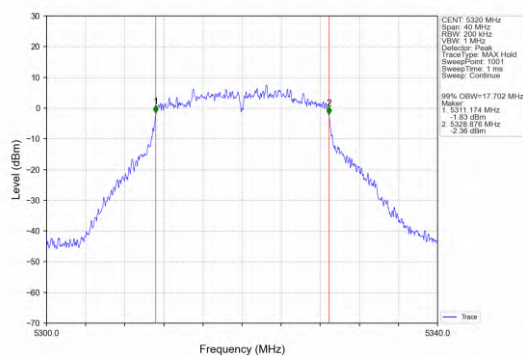


802.11ac(VHT20)_HCH_5320MHz_Ant2_NTNV

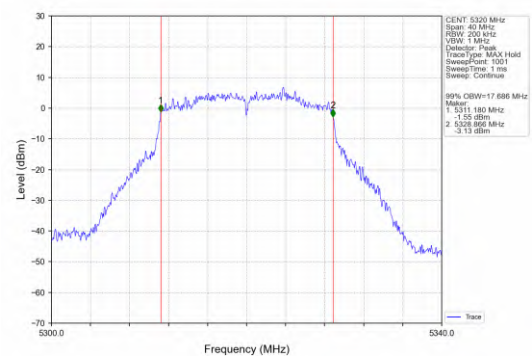


802.11ac(VHT20)_LCH_5500MHz_Ant1_NTNV

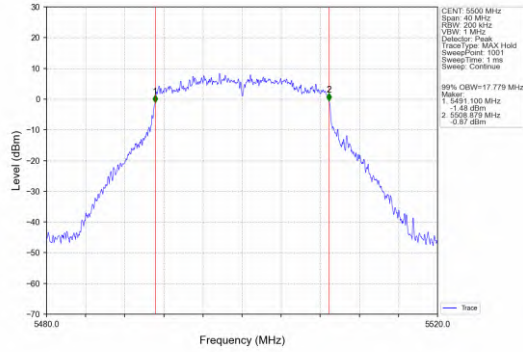


802.11ac(VHT20)_LCH_5500MHz_Ant2_NTNV

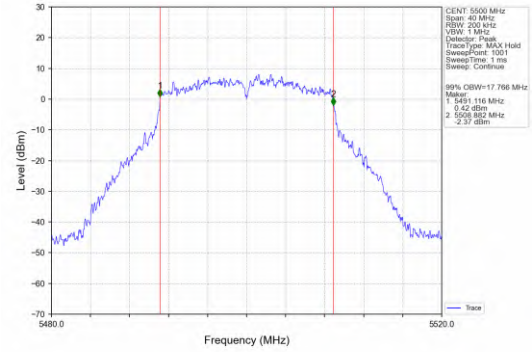


802.11ac(VHT20)_MCH_5580MHz_Ant1_NTNV

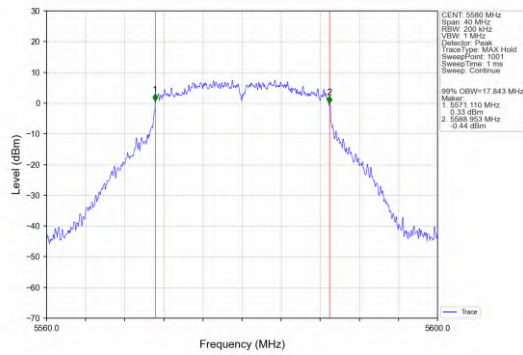


802.11ac(VHT20)_MCH_5580MHz_Ant2_NTNV

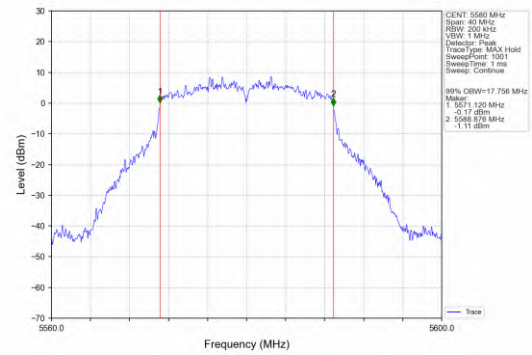


802.11ac(VHT20)_HCH_5700MHz_Ant1_NTNV

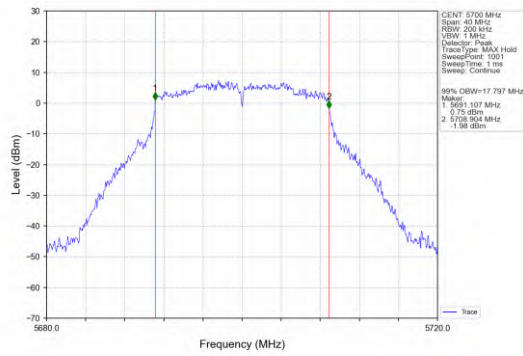


802.11ac(VHT20)_HCH_5700MHz_Ant2_NTNV

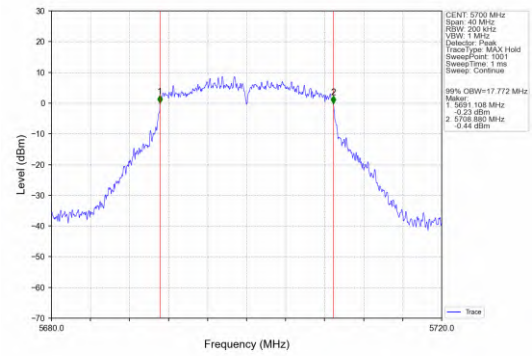


802.11ac(VHT20)_LCH_5745MHz_Ant1_NTNV

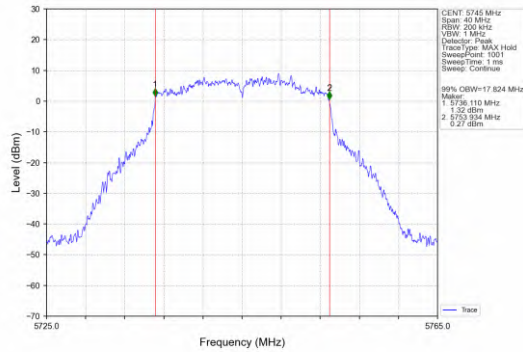


802.11ac(VHT20)_LCH_5745MHz_Ant2_NTNV

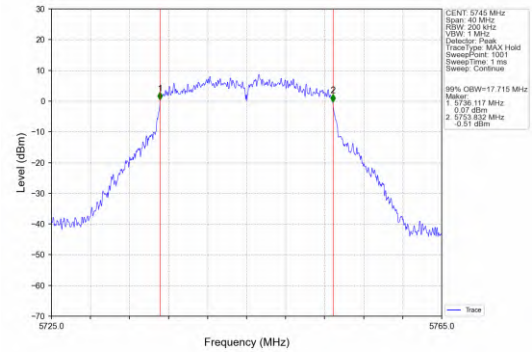


802.11ac(VHT20)_MCH_5785MHz_Ant1_NTNV

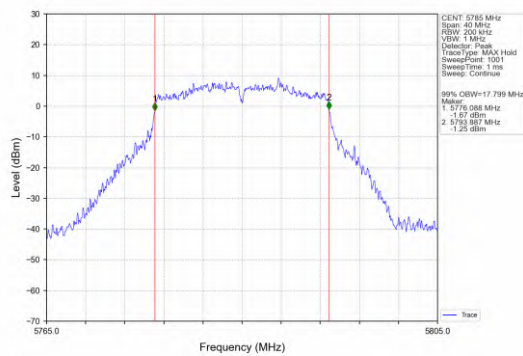


802.11ac(VHT20)_MCH_5785MHz_Ant2_NTNV

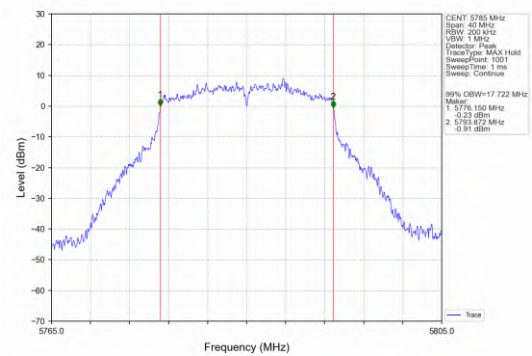


802.11ac(VHT20)_HCH_5825MHz_Ant1_NTNV

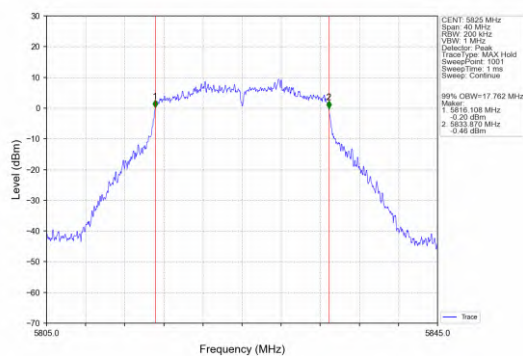


802.11ac(VHT20)_HCH_5825MHz_Ant2_NTNV

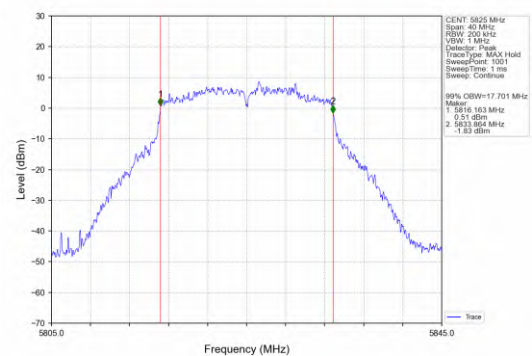


802.11ac(VHT40)_LCH_5190MHz_Ant1_NTNV

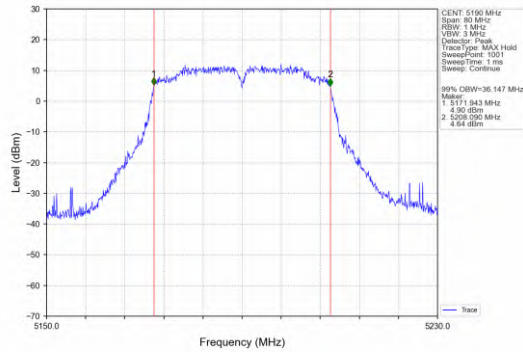


802.11ac(VHT40)_LCH_5190MHz_Ant2_NTNV

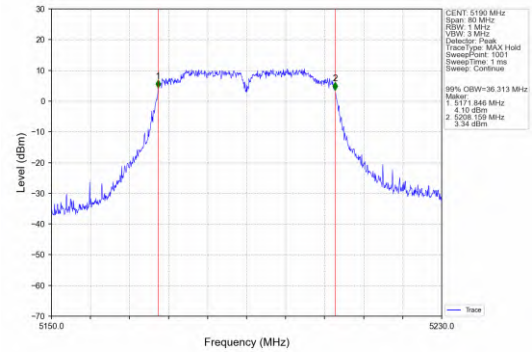


802.11ac(VHT40)_HCH_5230MHz_Ant1_NTNV

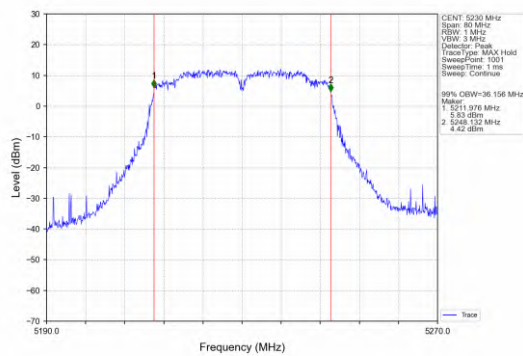


802.11ac(VHT40)_HCH_5230MHz_Ant2_NTNV

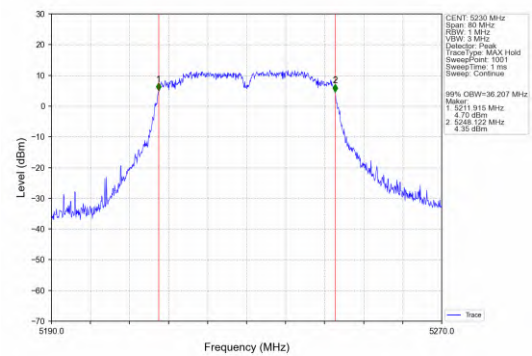


802.11ac(VHT40)_LCH_5270MHz_Ant1_NTNV

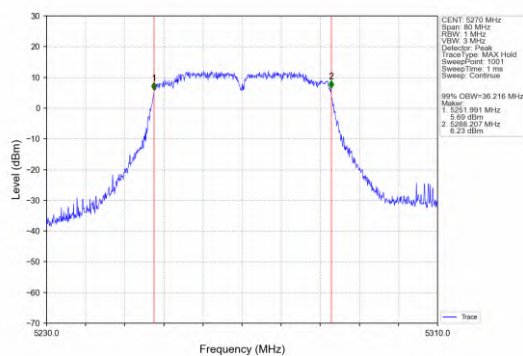


802.11ac(VHT40)_LCH_5270MHz_Ant2_NTNV

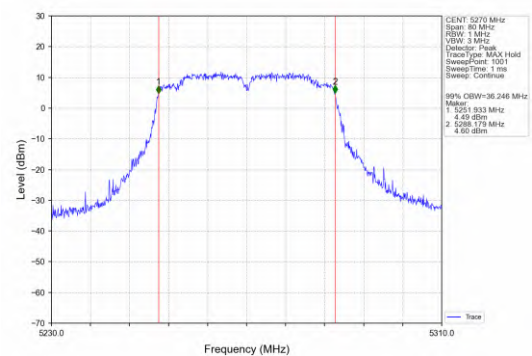


802.11ac(VHT40)_HCH_5310MHz_Ant1_NTNV

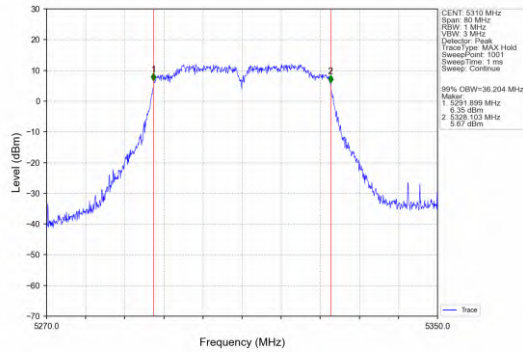


802.11ac(VHT40)_HCH_5310MHz_Ant2_NTNV

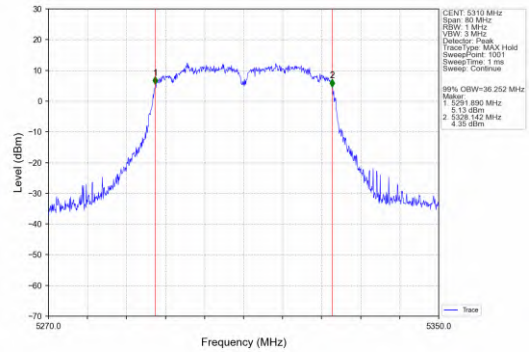


802.11ac(VHT40)_LCH_5510MHz_Ant1_NTNV

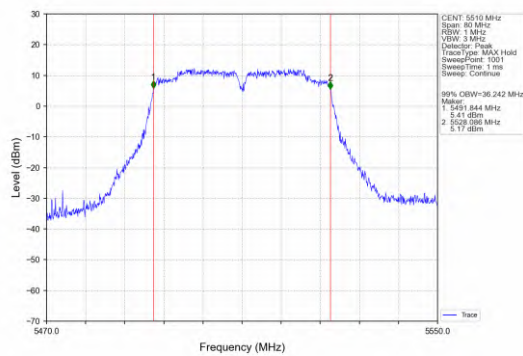


802.11ac(VHT40)_LCH_5510MHz_Ant2_NTNV

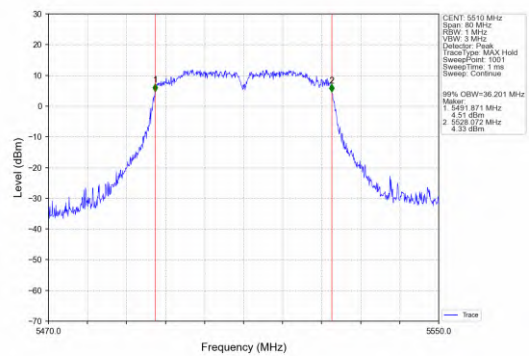


802.11ac(VHT40)_MCH_5550MHz_Ant1_NTNV

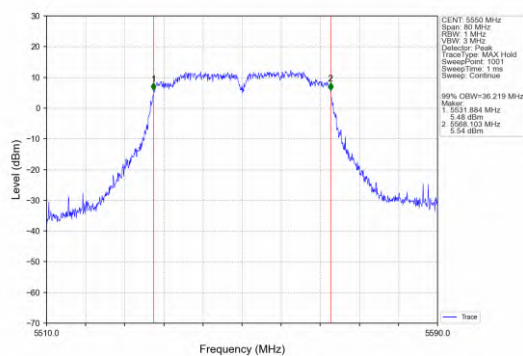


802.11ac(VHT40)_MCH_5550MHz_Ant2_NTNV

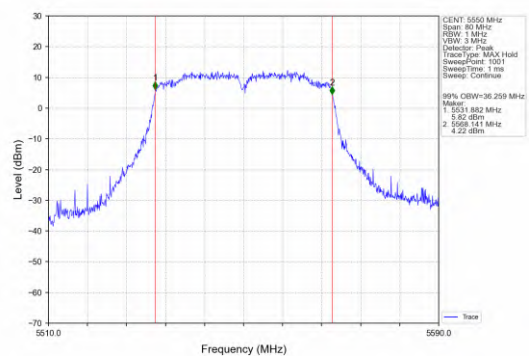


802.11ac(VHT40)_HCH_5670MHz_Ant1_NTNV

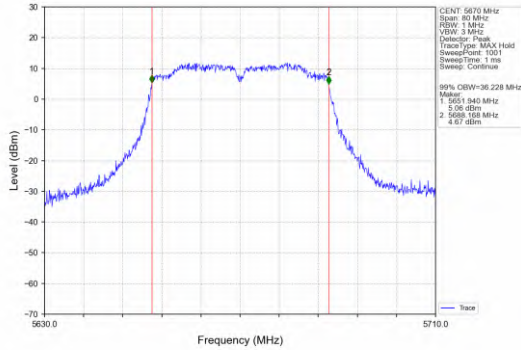


802.11ac(VHT40)_HCH_5670MHz_Ant2_NTNV

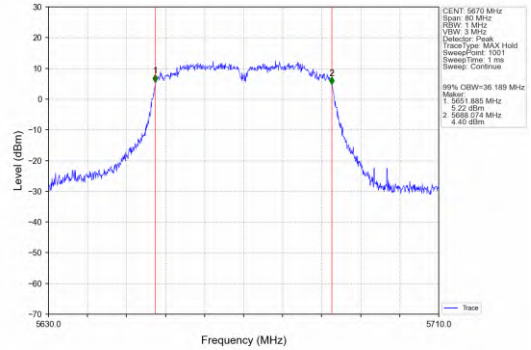


802.11ac(VHT40)_LCH_5755MHz_Ant1_NTNV

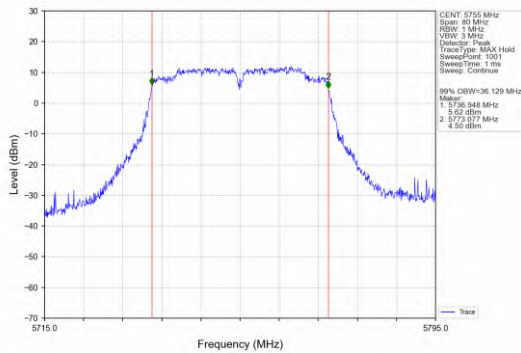


802.11ac(VHT40)_LCH_5755MHz_Ant2_NTNV

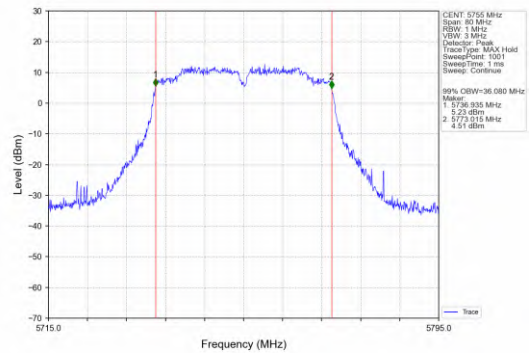


802.11ac(VHT40)_HCH_5795MHz_Ant1_NTNV

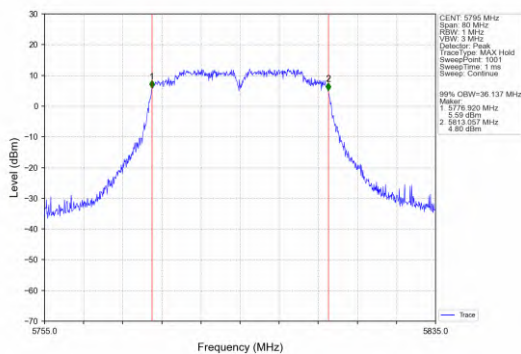


802.11ac(VHT40)_HCH_5795MHz_Ant2_NTNV

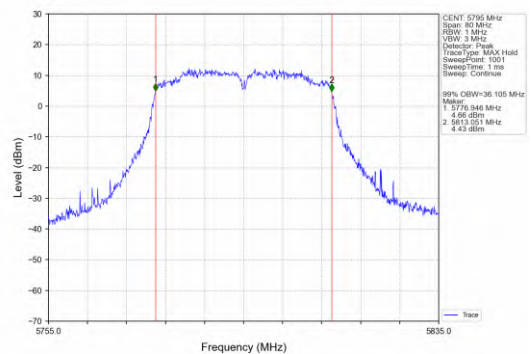


802.11ac(VHT80)_MCH_5210MHz_Ant1_NTNV

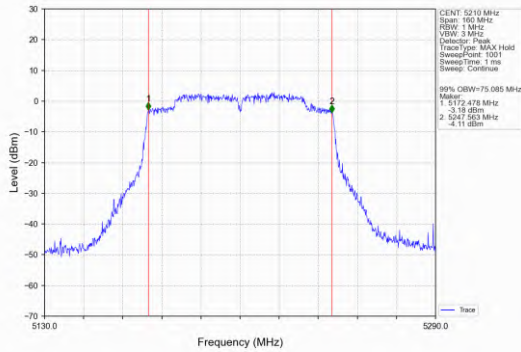


802.11ac(VHT80)_MCH_5210MHz_Ant2_NTNV

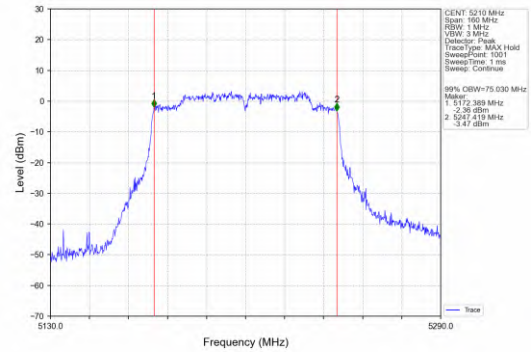


802.11ac(VHT80)_MCH_5290MHz_Ant1_NTNV

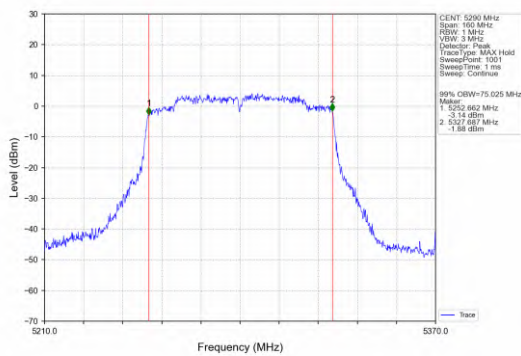


802.11ac(VHT80)_MCH_5290MHz_Ant2_NTNV

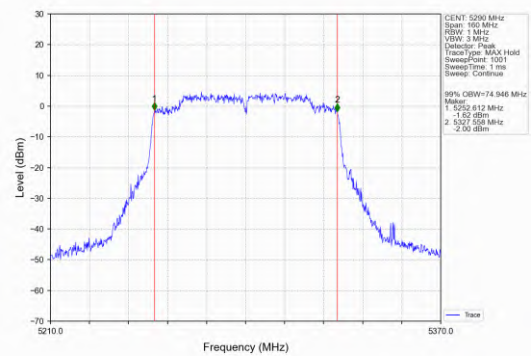


802.11ac(VHT80)_LCH_5530MHz_Ant1_NTNV

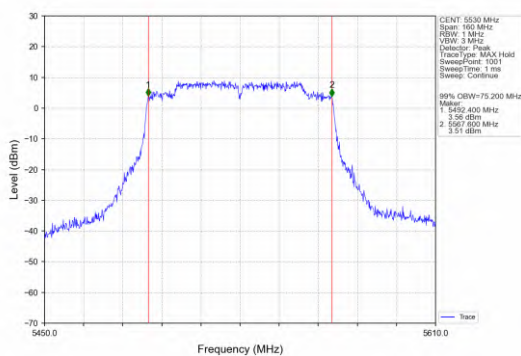


802.11ac(VHT80)_LCH_5530MHz_Ant2_NTNV

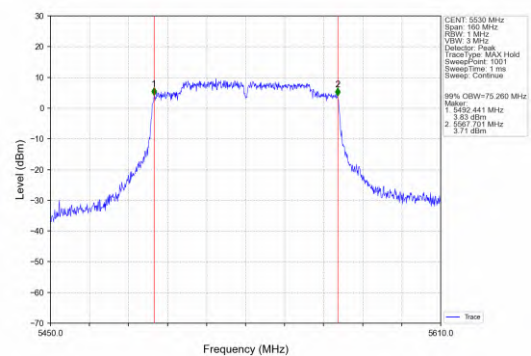


802.11ac(VHT80)_HCH_5610MHz_Ant1_NTNV

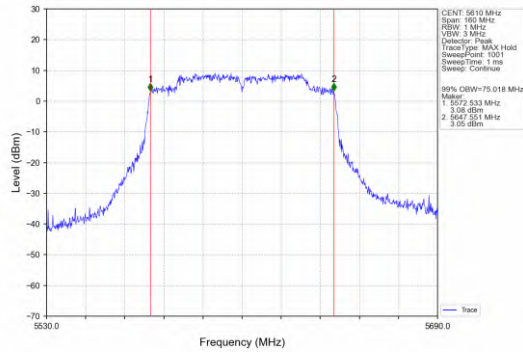


802.11ac(VHT80)_HCH_5610MHz_Ant2_NTNV

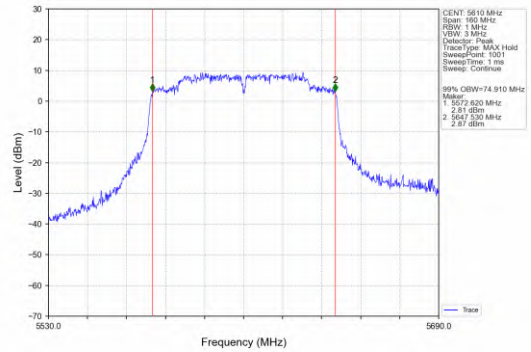


802.11ac(VHT80)_MCH_5775MHz_Ant1_NTNV

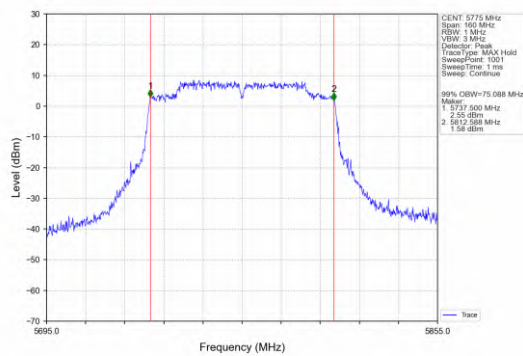


802.11ac(VHT80)_MCH_5775MHz_Ant2_NTNV

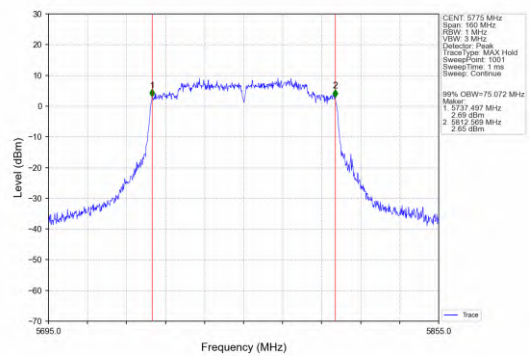


802.11ac(VHT160)_MCH_5250MHz_Ant1_NTNV

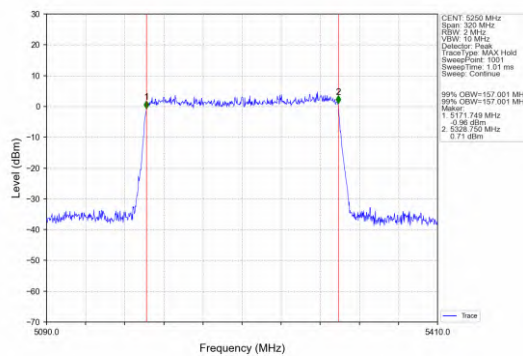


802.11ac(VHT160)_MCH_5250MHz_Ant2_NTNV

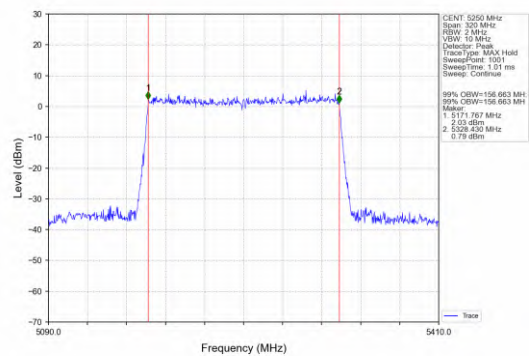


802.11ac(VHT160)_MCH_5570MHz_Ant1_NTNV

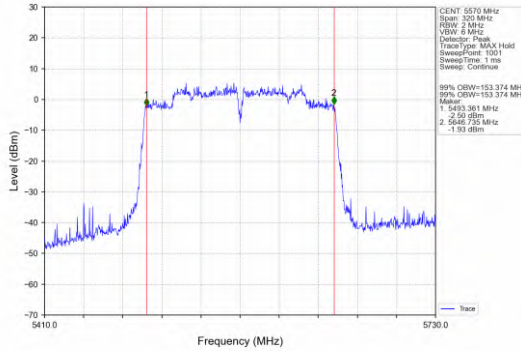


802.11ac(VHT160)_MCH_5570MHz_Ant2_NTNV

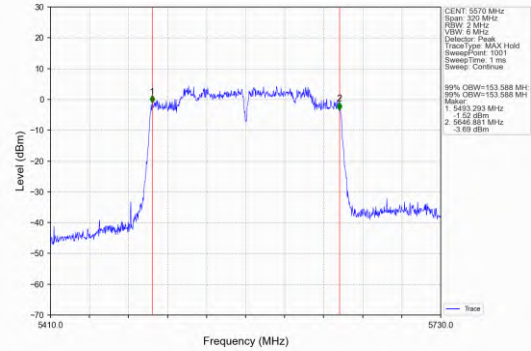


802.11ax(HEW20)_LCH_5180MHz_SU_/_Ant1_NTNV

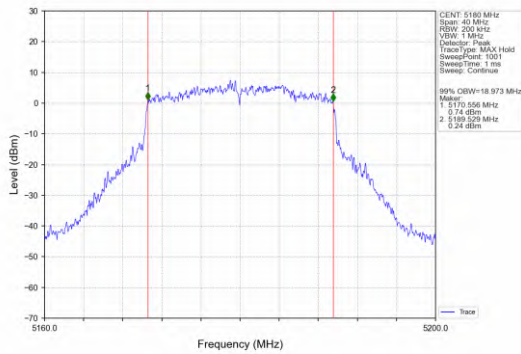


802.11ax(HEW20)_LCH_5180MHz_SU_/_Ant2_NTNV

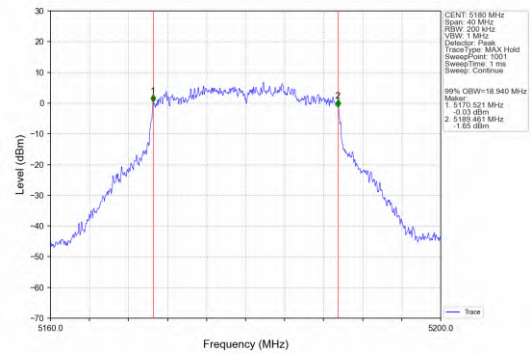


802.11ax(HEW20)_MCH_5200MHz_SU_/_Ant1_NTNV

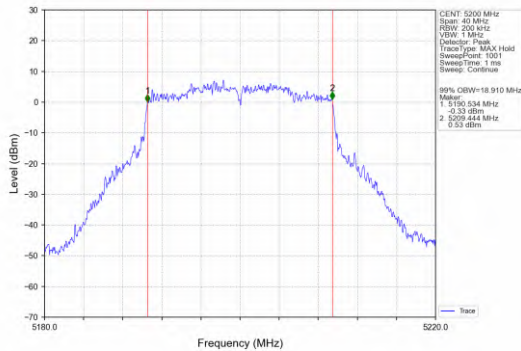


802.11ax(HEW20)_MCH_5200MHz_SU_/_Ant2_NTNV

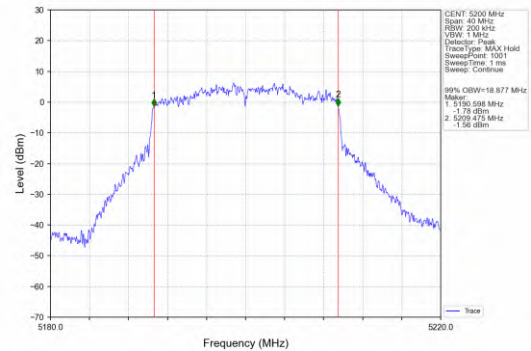


802.11ax(HEW20)_HCH_5240MHz_SU_/_Ant1_NTNV

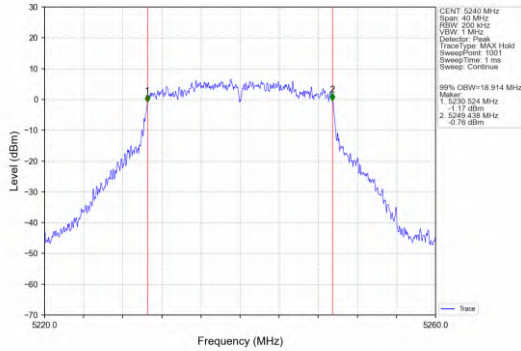


802.11ax(HEW20)_HCH_5240MHz_SU_/_Ant2_NTNV

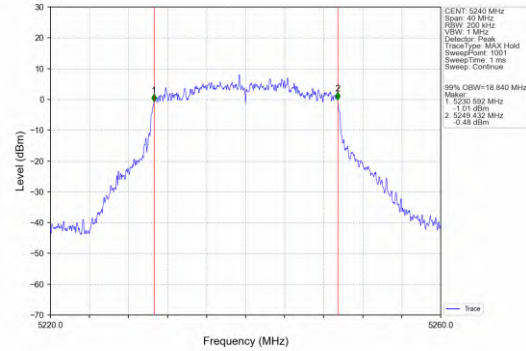


802.11ax(HEW20)_LCH_5260MHz_SU_/_Ant1_NTNV

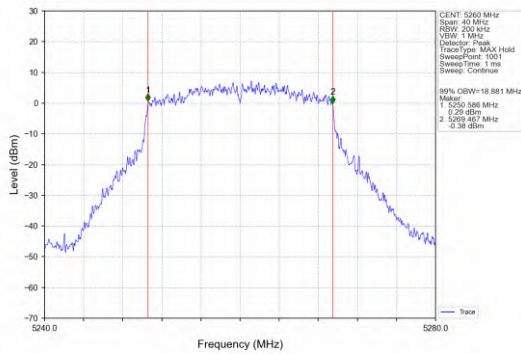


802.11ax(HEW20)_LCH_5260MHz_SU_/_Ant2_NTNV

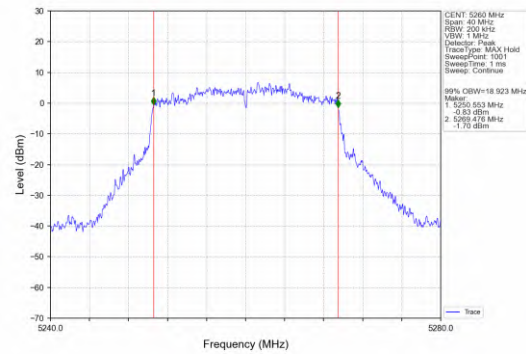


802.11ax(HEW20)_MCH_5300MHz_SU_/_Ant1_NTNV

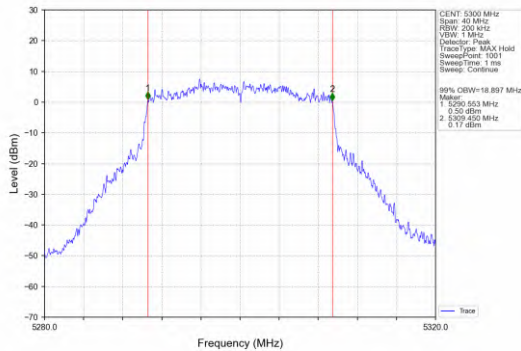


802.11ax(HEW20)_MCH_5300MHz_SU_/_Ant2_NTNV

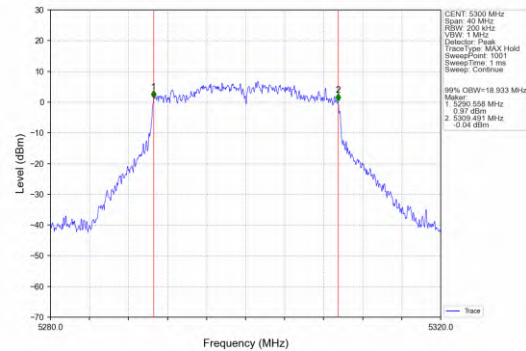


802.11ax(HEW20)_HCH_5320MHz_SU_ / _Ant1_NTNV

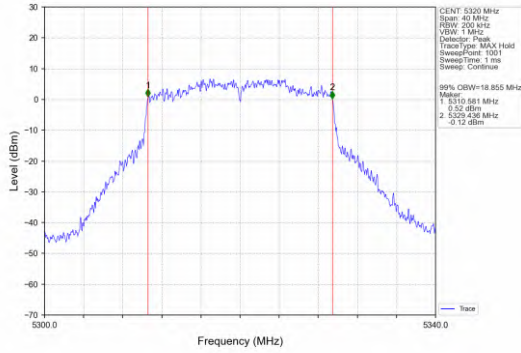


802.11ax(HEW20)_HCH_5320MHz_SU_ / _Ant2_NTNV

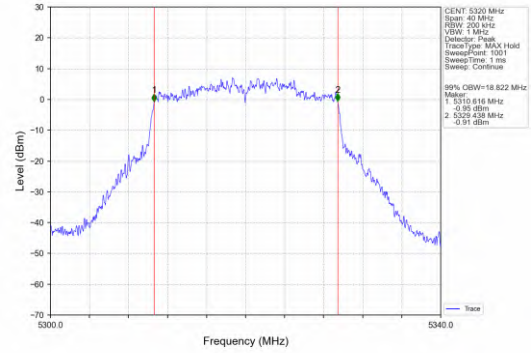


802.11ax(HEW20)_LCH_5500MHz_SU_ / _Ant1_NTNV

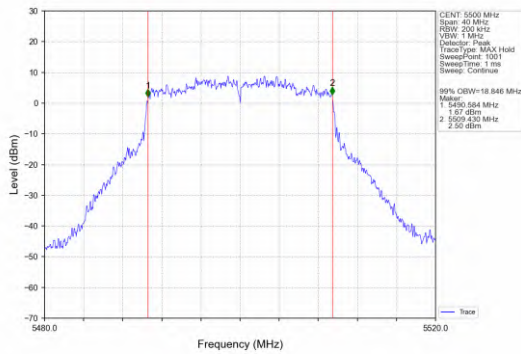


802.11ax(HEW20)_LCH_5500MHz_SU_ / _Ant2_NTNV

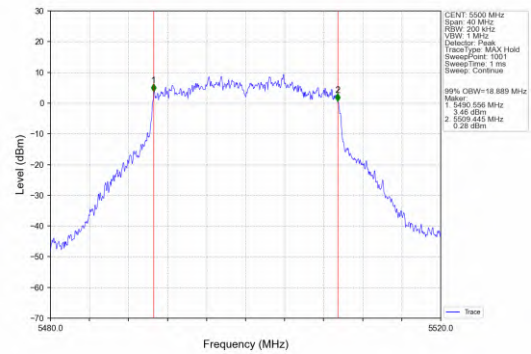


802.11ax(HEW20)_MCH_5580MHz_SU_ / _Ant1_NTNV

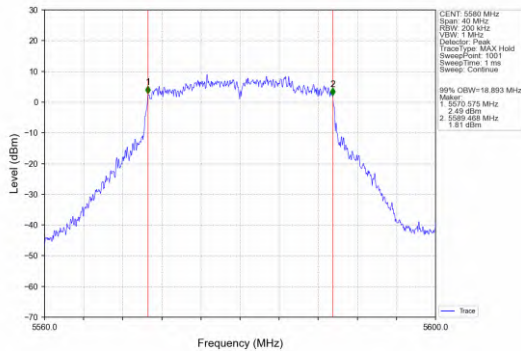


802.11ax(HEW20)_MCH_5580MHz_SU_ / _Ant2_NTNV

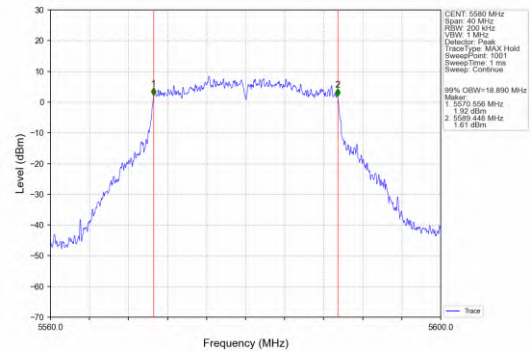


802.11ax(HEW20)_HCH_5700MHz_SU_/_Ant1_NTNV

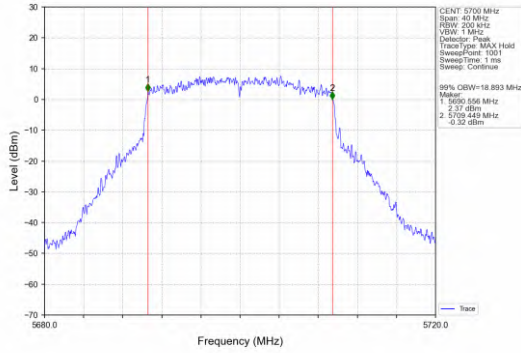


802.11ax(HEW20)_HCH_5700MHz_SU_/_Ant2_NTNV

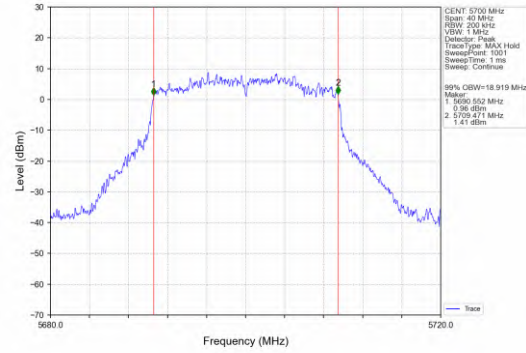


802.11ax(HEW20)_LCH_5745MHz_SU_/_Ant1_NTNV

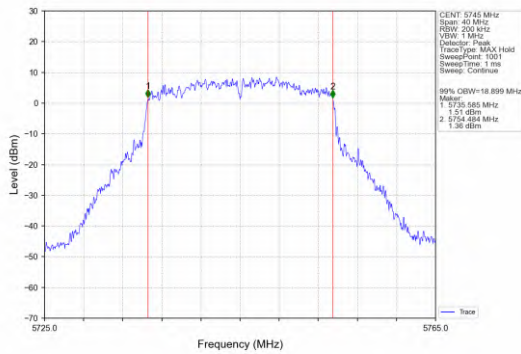


802.11ax(HEW20)_LCH_5745MHz_SU_/_Ant2_NTNV

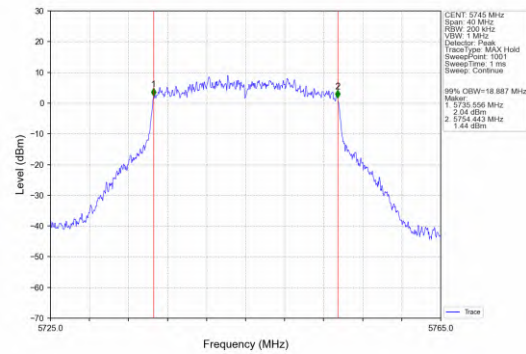


802.11ax(HEW20)_MCH_5785MHz_SU_/_Ant1_NTNV

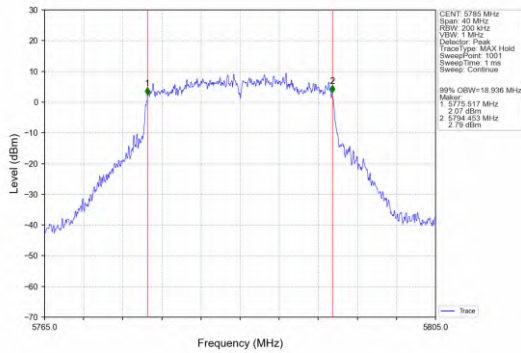


802.11ax(HEW20)_MCH_5785MHz_SU_/_Ant2_NTNV

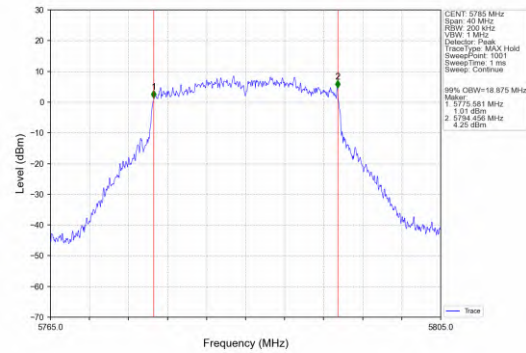


802.11ax(HEW20)_HCH_5825MHz_SU_ / _Ant1_NTNV

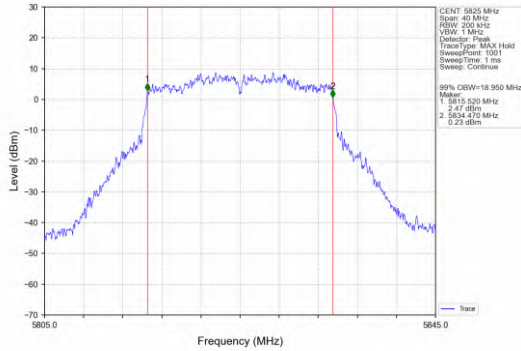


802.11ax(HEW20)_HCH_5825MHz_SU_ / _Ant2_NTNV

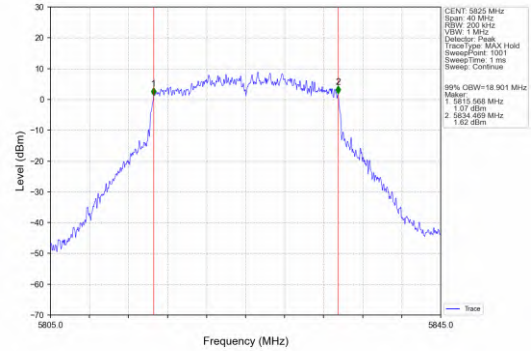


802.11ax(HEW40)_LCH_5190MHz_SU_ / _Ant1_NTNV

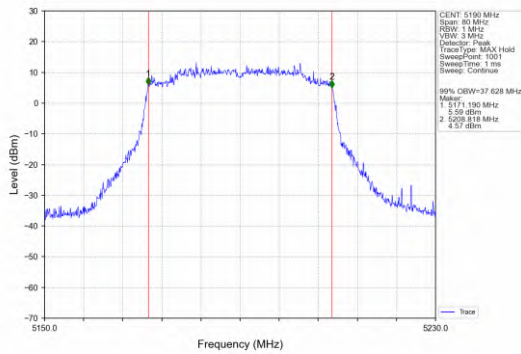


802.11ax(HEW40)_LCH_5190MHz_SU_ / _Ant2_NTNV

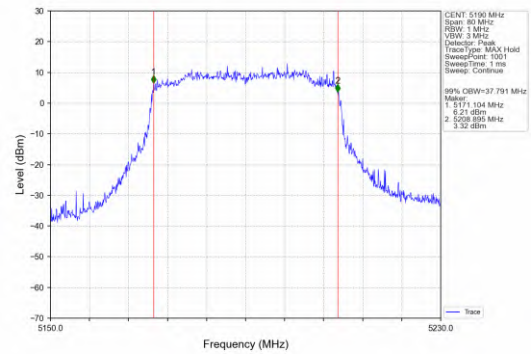


802.11ax(HEW40)_HCH_5230MHz_SU_ / _Ant1_NTNV

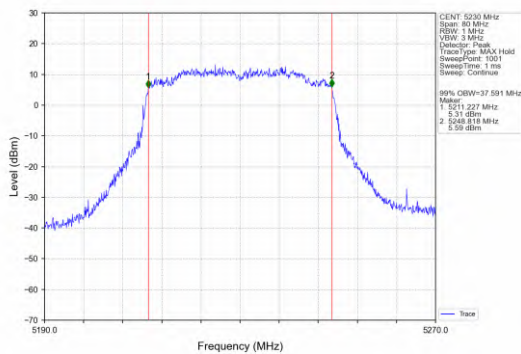


802.11ax(HEW40)_HCH_5230MHz_SU_ / _Ant2_NTNV

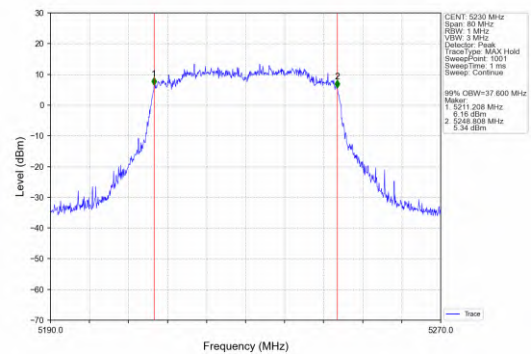


802.11ax(HEW40)_LCH_5270MHz_SU_ / _Ant1_NTNV

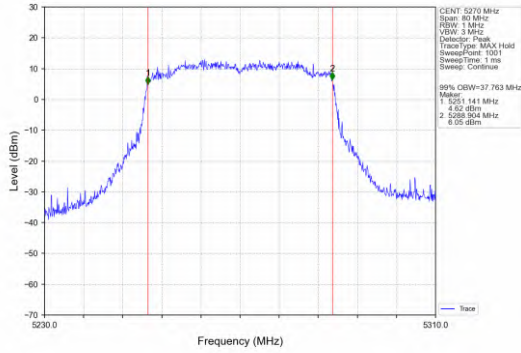


802.11ax(HEW40)_LCH_5270MHz_SU_ / _Ant2_NTNV

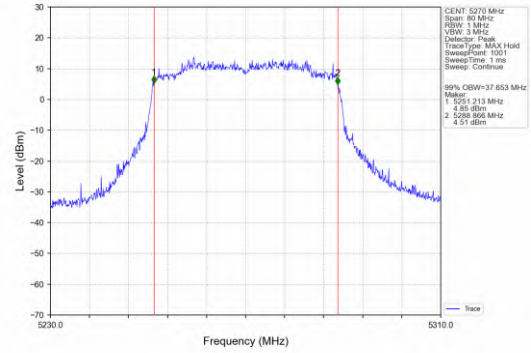


802.11ax(HEW40)_HCH_5310MHz_SU_ / _Ant1_NTNV

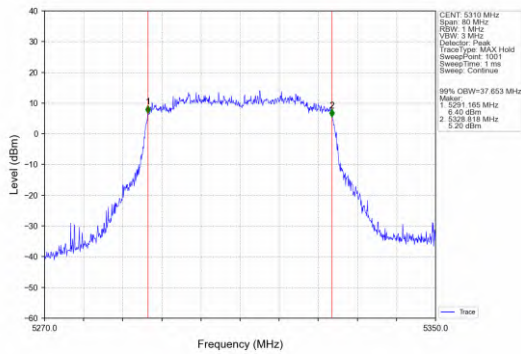


802.11ax(HEW40)_HCH_5310MHz_SU_ / _Ant2_NTNV

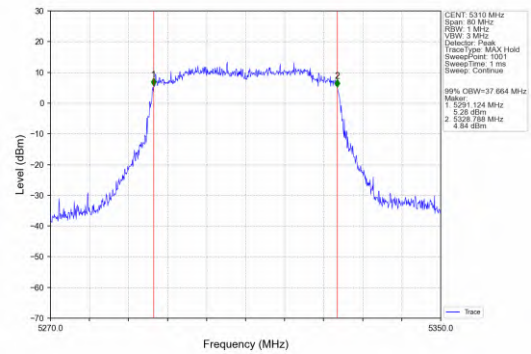


802.11ax(HEW40)_LCH_5510MHz_SU_ / _Ant1_NTNV

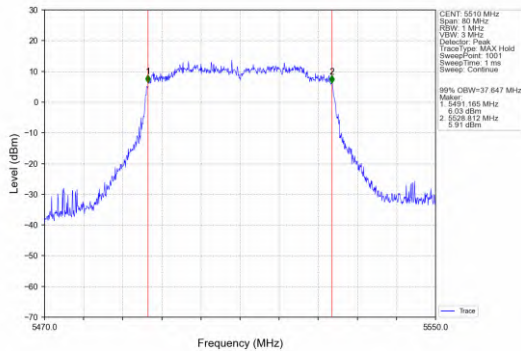


802.11ax(HEW40)_LCH_5510MHz_SU_ / _Ant2_NTNV

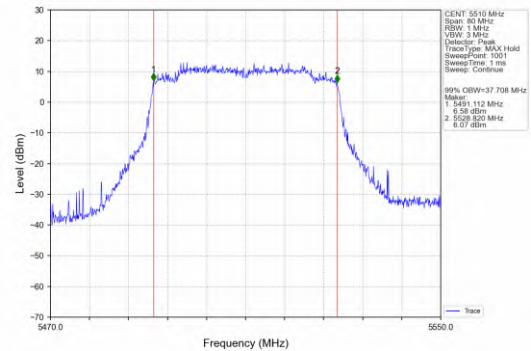


802.11ax(HEW40)_MCH_5550MHz_SU_ / _Ant1_NTNV

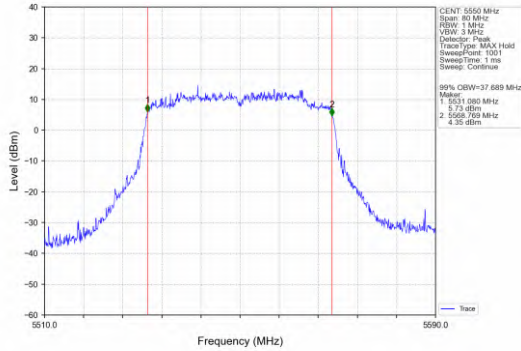


802.11ax(HEW40)_MCH_5550MHz_SU_ / _Ant2_NTNV

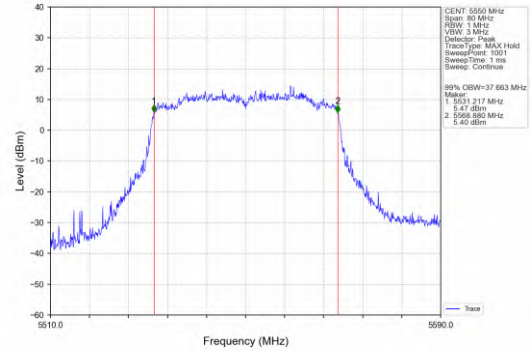


802.11ax(HEW40)_HCH_5670MHz_SU_ / _Ant1_NTNV

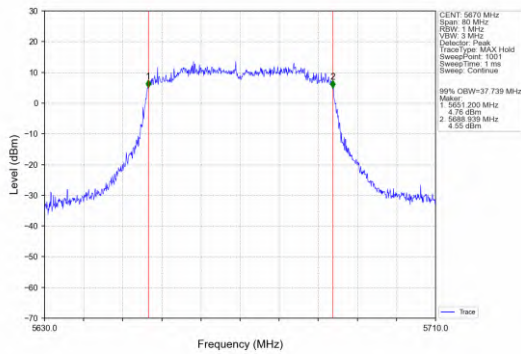


802.11ax(HEW40)_HCH_5670MHz_SU_ / _Ant2_NTNV

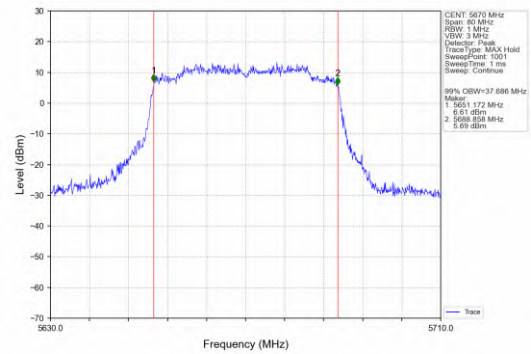


802.11ax(HEW40)_LCH_5755MHz_SU_ / _Ant1_NTNV

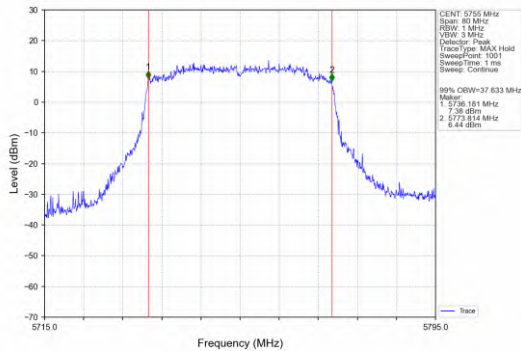


802.11ax(HEW40)_LCH_5755MHz_SU_ / _Ant2_NTNV

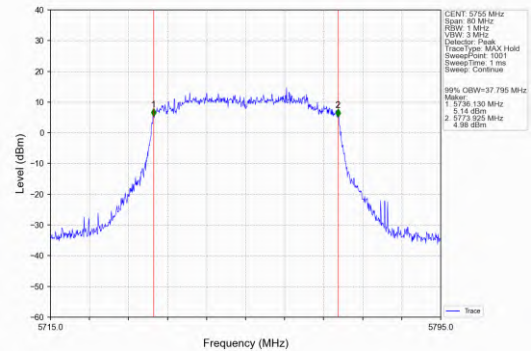


802.11ax(HEW40)_HCH_5795MHz_SU_/_Ant1_NTNV

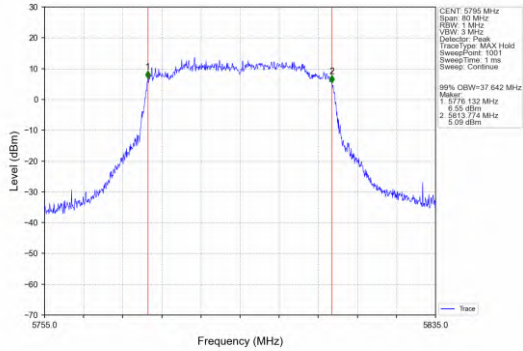


802.11ax(HEW40)_HCH_5795MHz_SU_/_Ant2_NTNV

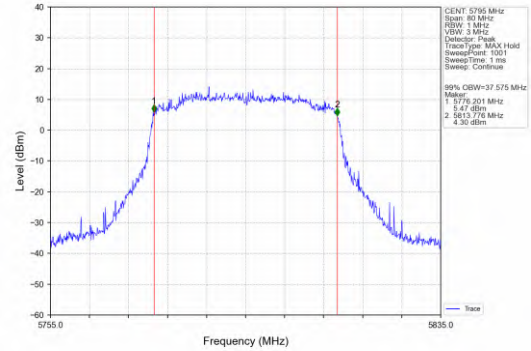


802.11ax(HEW80)_MCH_5210MHz_SU_/_Ant1_NTNV

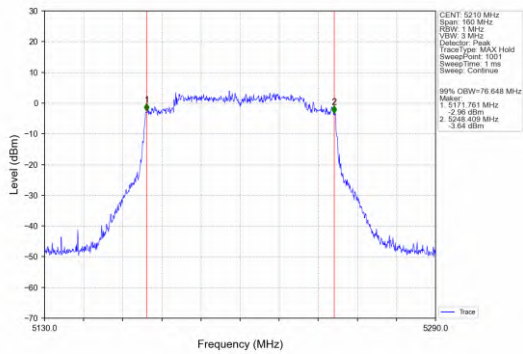


802.11ax(HEW80)_MCH_5210MHz_SU_/_Ant2_NTNV

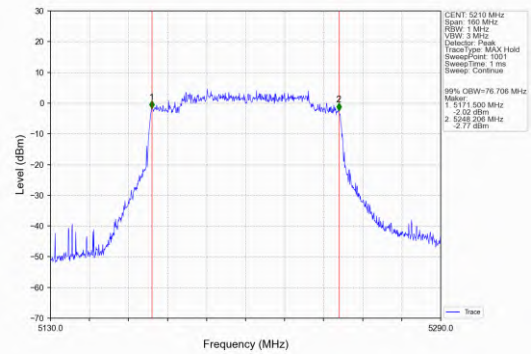


802.11ax(HEW80)_MCH_5290MHz_SU_/_Ant1_NTNV

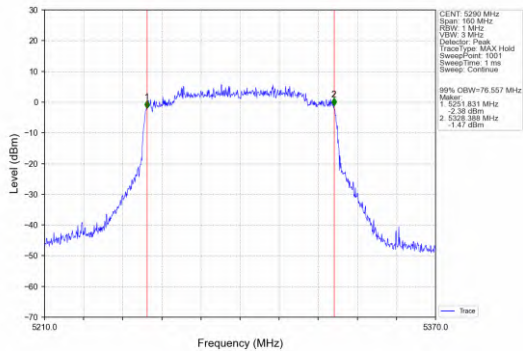


802.11ax(HEW80)_MCH_5290MHz_SU_/_Ant2_NTNV

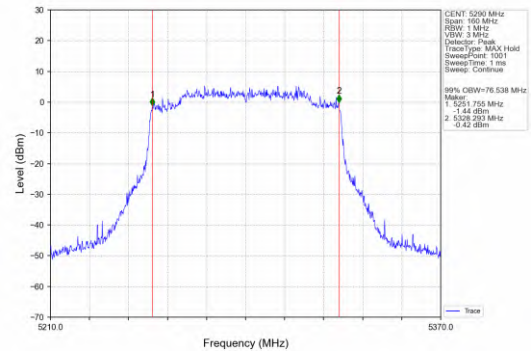


802.11ax(HEW80)_LCH_5530MHz_SU_ / _Ant1_NTNV

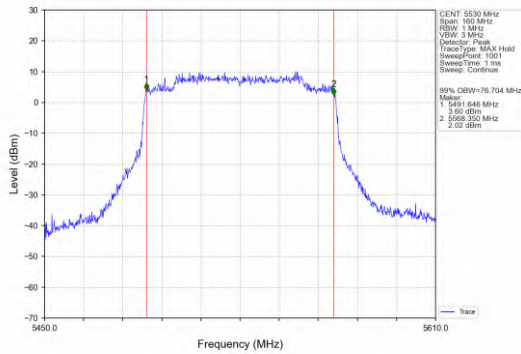


802.11ax(HEW80)_LCH_5530MHz_SU_ / _Ant2_NTNV

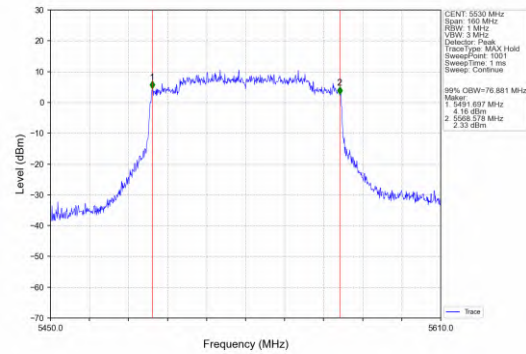


802.11ax(HEW80)_HCH_5610MHz_SU_ / _Ant1_NTNV

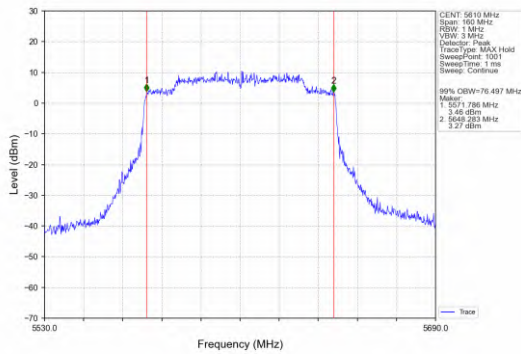


802.11ax(HEW80)_HCH_5610MHz_SU_ / _Ant2_NTNV

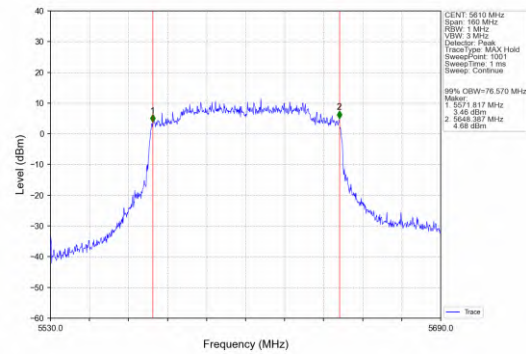


802.11ax(HEW80)_MCH_5775MHz_SU_ / _Ant1_NTNV

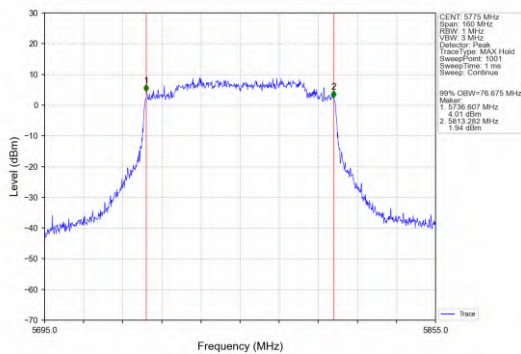


802.11ax(HEW80)_MCH_5775MHz_SU_ / _Ant2_NTNV

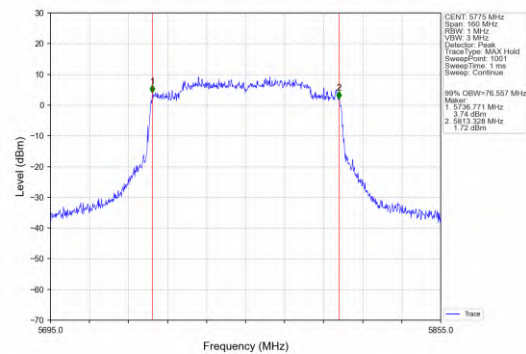


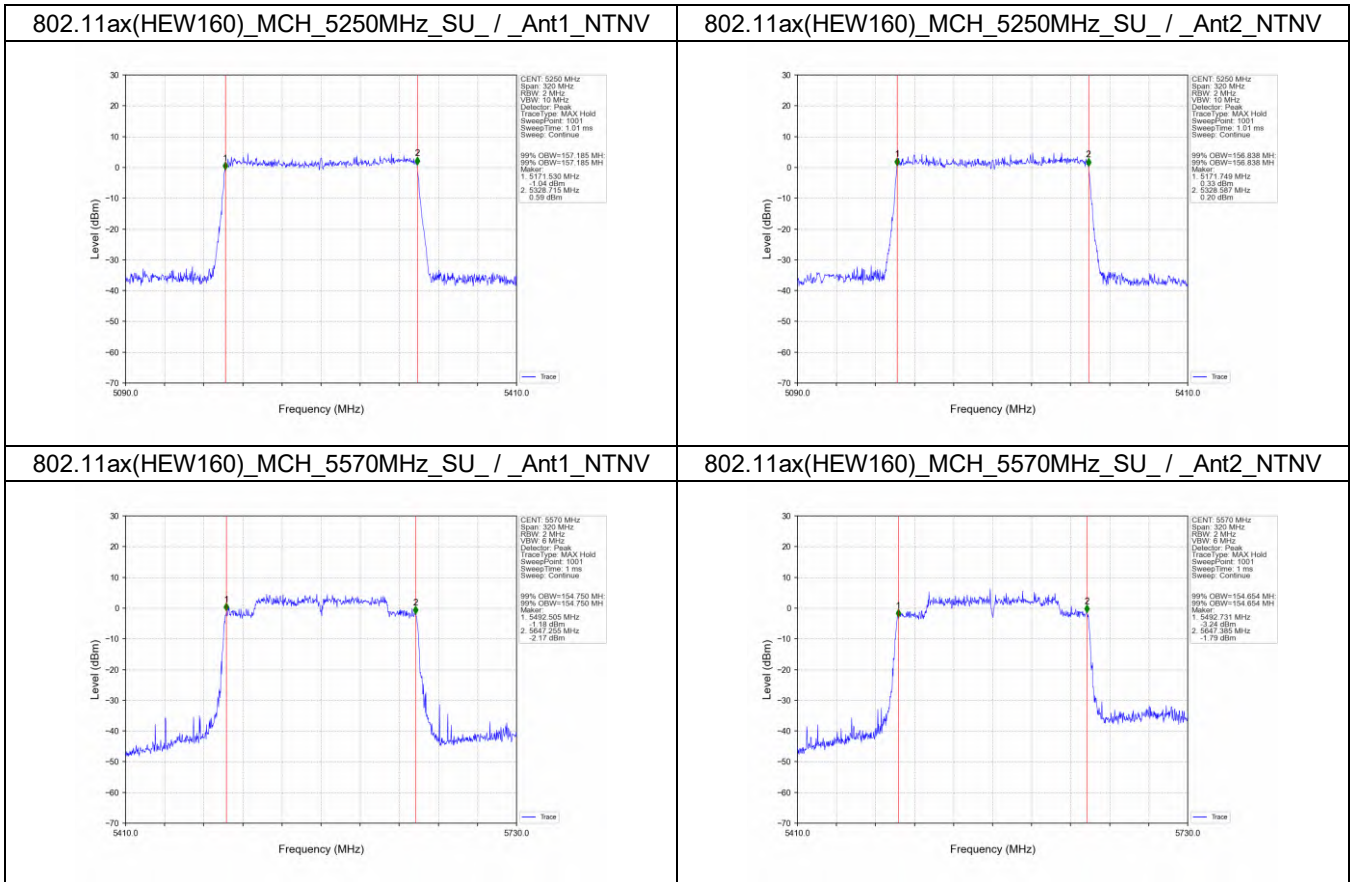


2.2.2 26dB BW

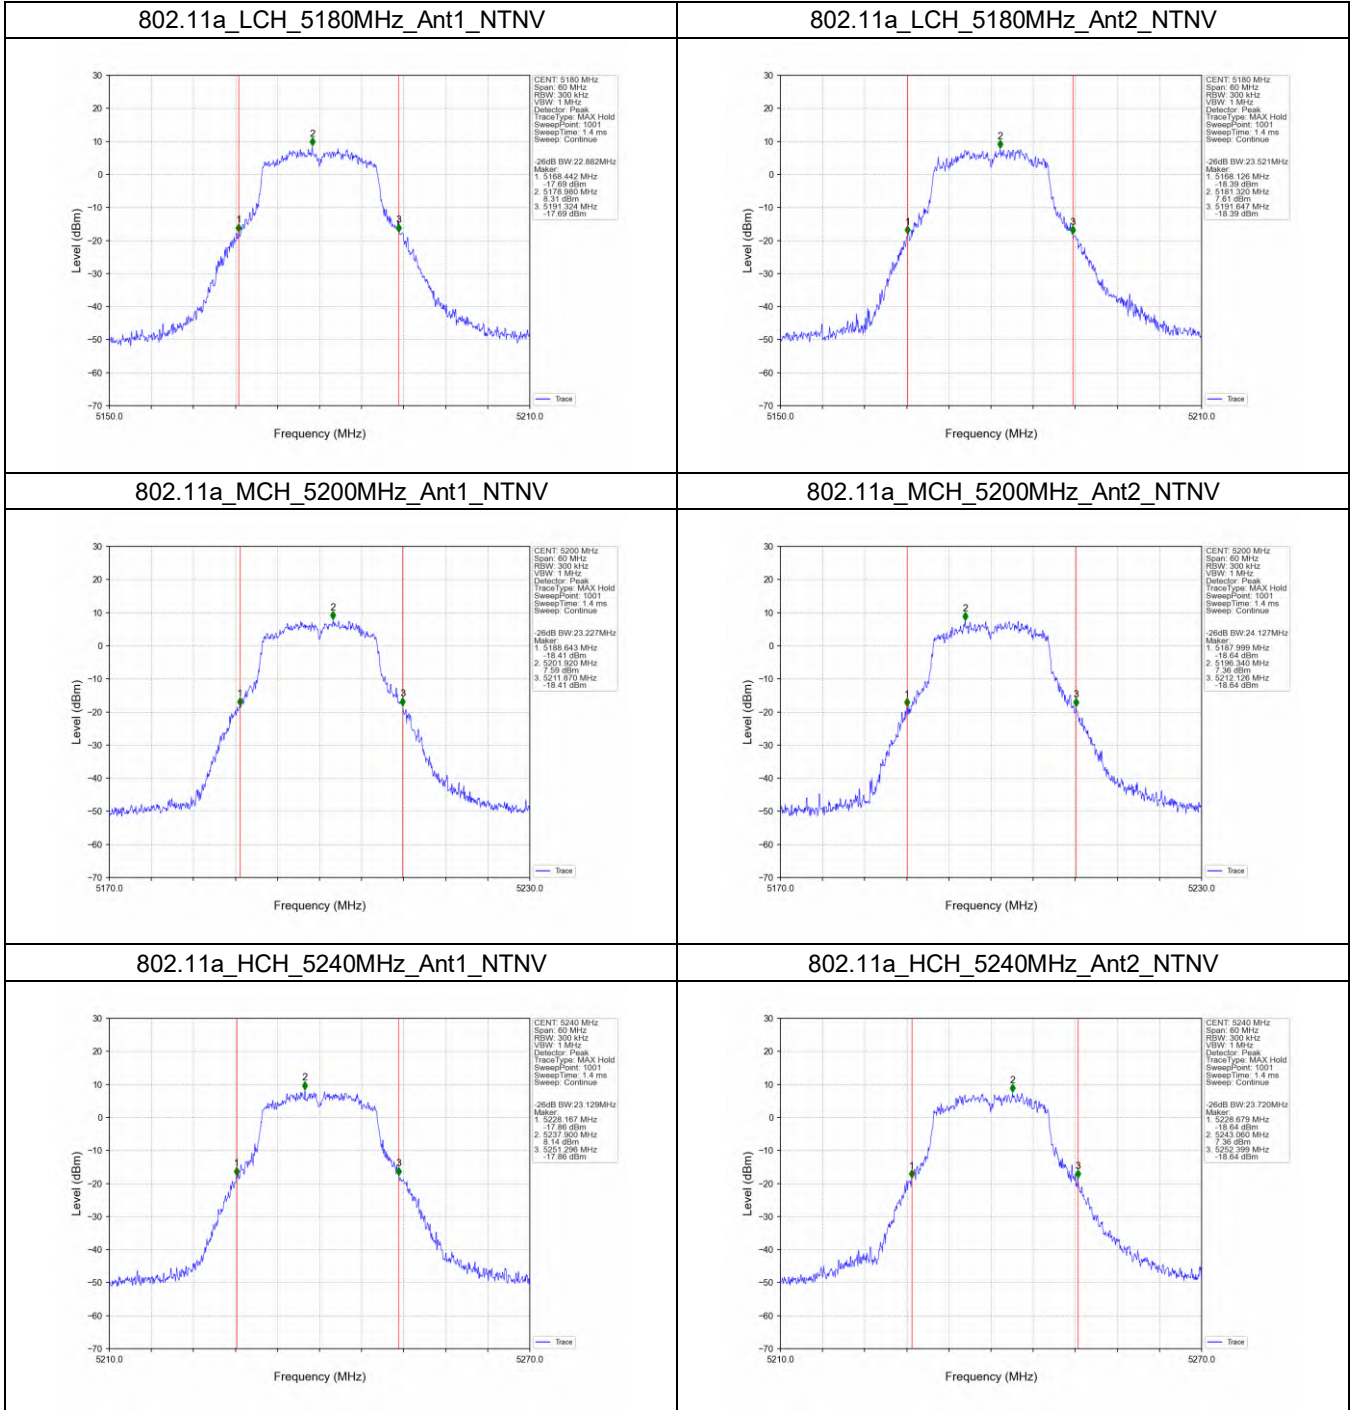


802.11a_LCH_5260MHz_Ant1_NTNV

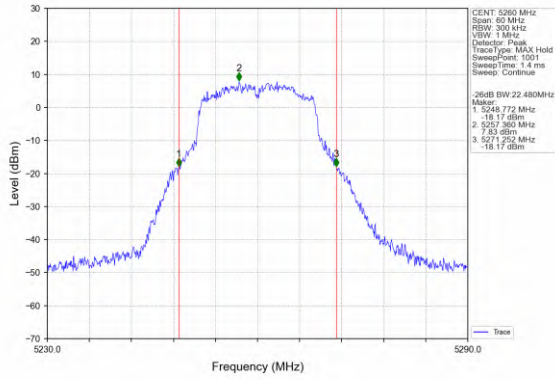


802.11a_LCH_5260MHz_Ant2_NTNV

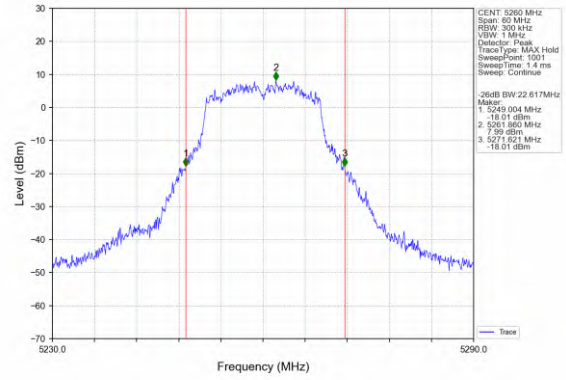


802.11a_MCH_5300MHz_Ant1_NTNV

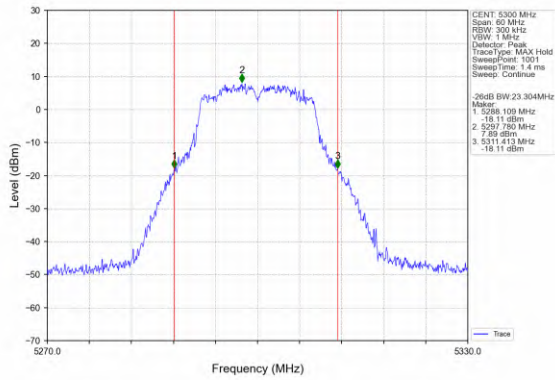


802.11a_MCH_5300MHz_Ant2_NTNV

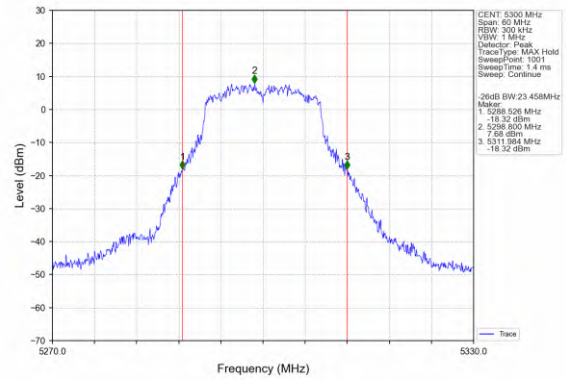


802.11a_HCH_5320MHz_Ant1_NTNV

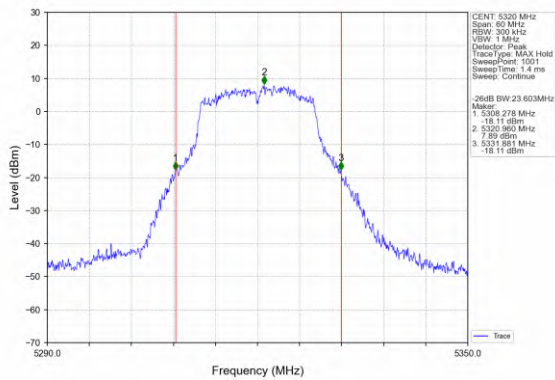


802.11a_HCH_5320MHz_Ant2_NTNV

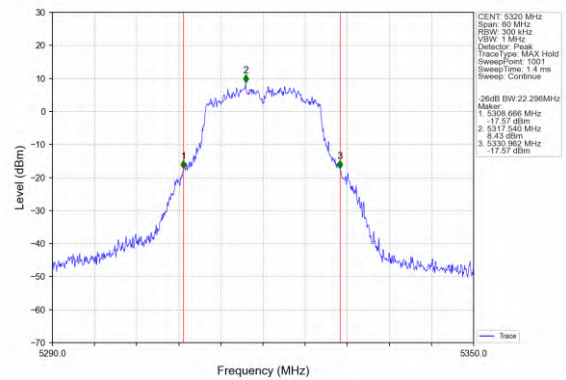


802.11a_LCH_5500MHz_Ant1_NTNV

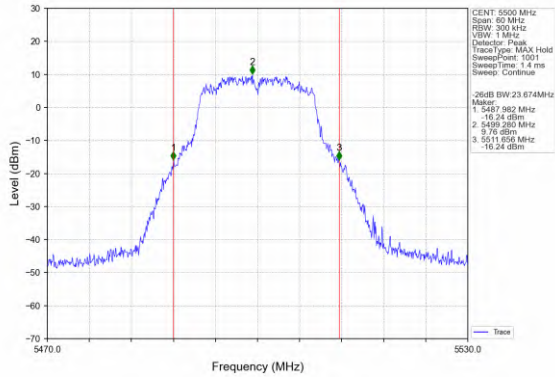


802.11a_LCH_5500MHz_Ant2_NTNV

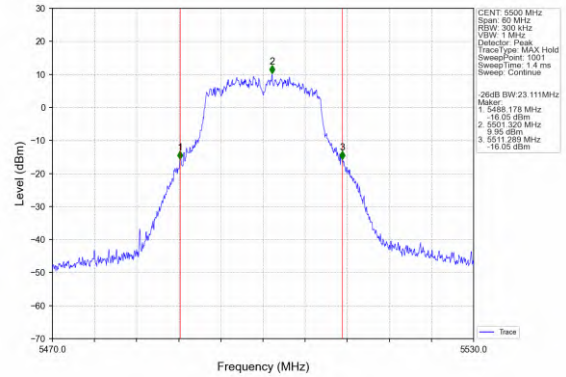


802.11a_MCH_5580MHz_Ant1_NTNV

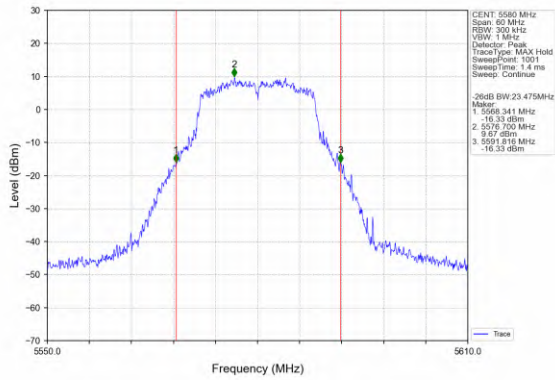


802.11a_MCH_5580MHz_Ant2_NTNV

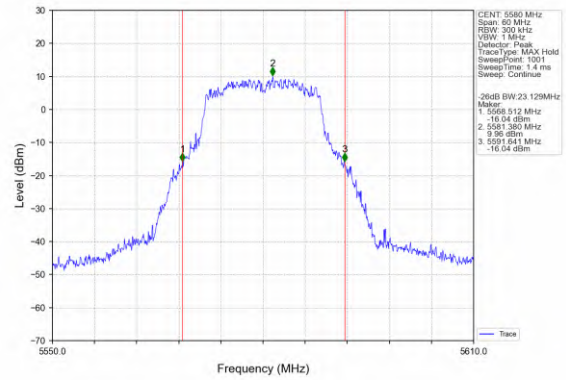


802.11a_HCH_5700MHz_Ant1_NTNV

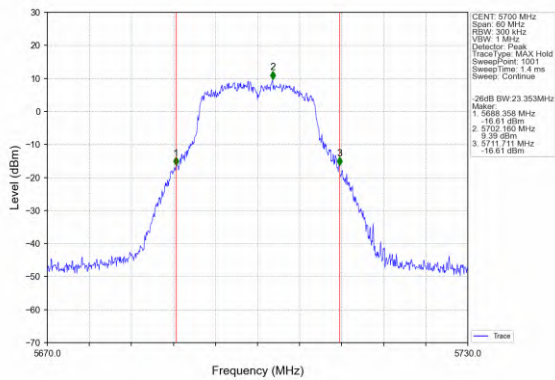


802.11a_HCH_5700MHz_Ant2_NTNV

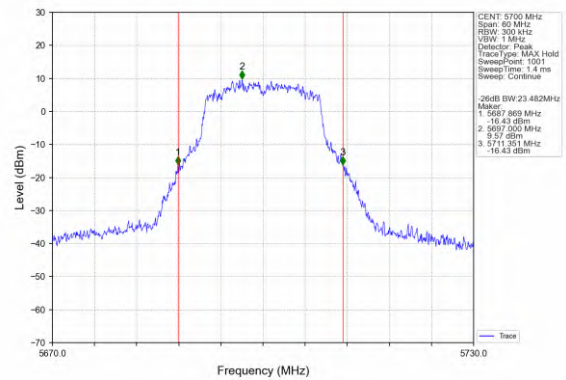


802.11n(HT20)_LCH_5180MHz_Ant1_NTNV

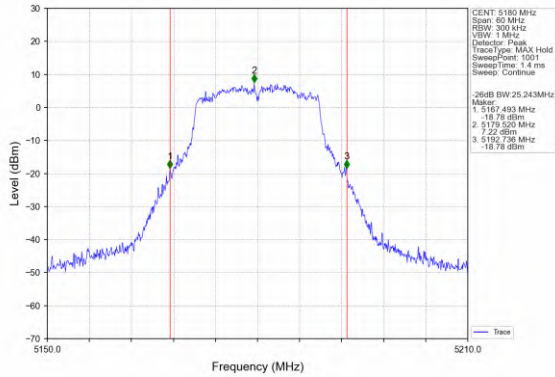


802.11n(HT20)_LCH_5180MHz_Ant2_NTNV

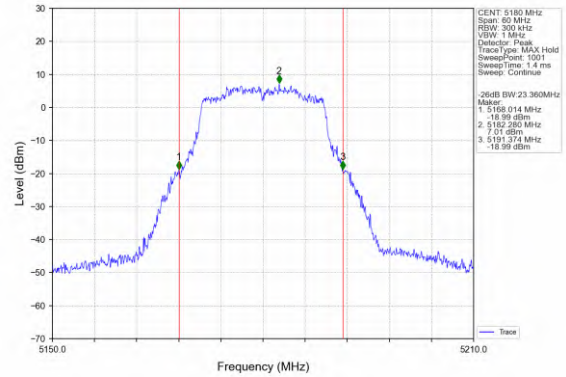


802.11n(HT20)_MCH_5200MHz_Ant1_NTNV

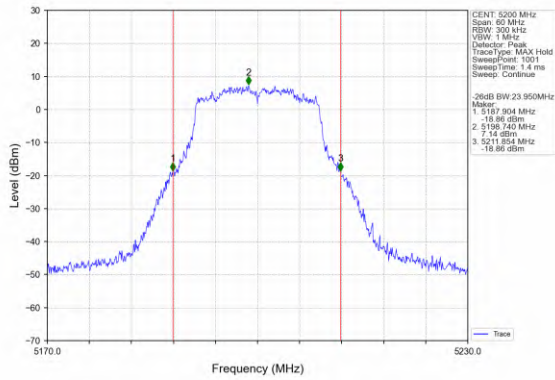


802.11n(HT20)_MCH_5200MHz_Ant2_NTNV

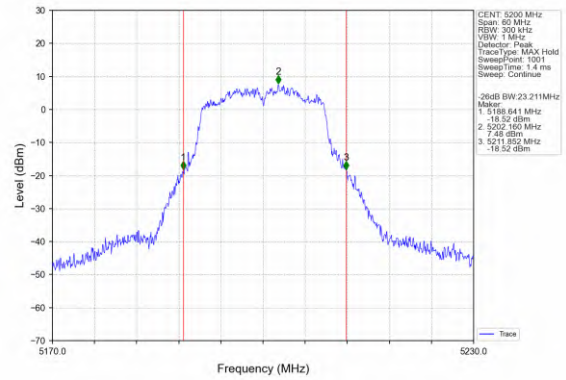


802.11n(HT20)_HCH_5240MHz_Ant1_NTNV

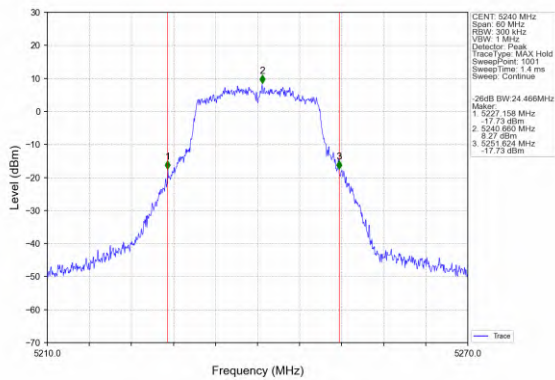


802.11n(HT20)_HCH_5240MHz_Ant2_NTNV

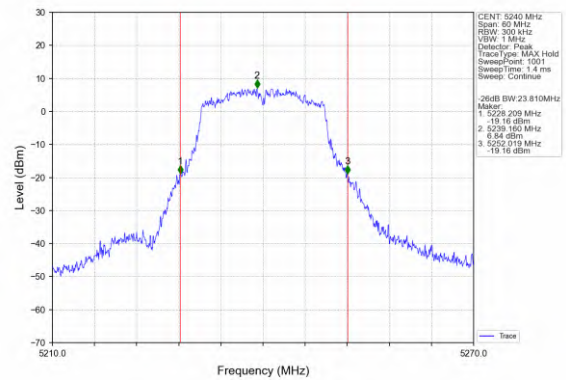


802.11n(HT20)_LCH_5260MHz_Ant1_NTNV

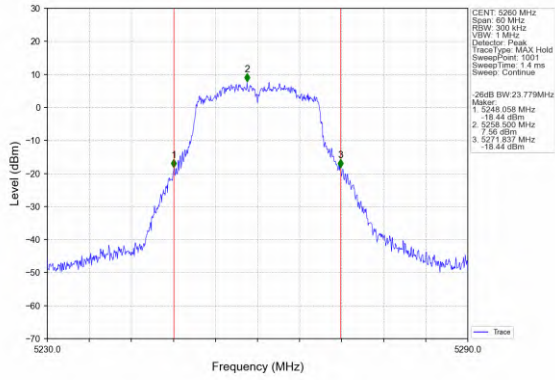


802.11n(HT20)_LCH_5260MHz_Ant2_NTNV

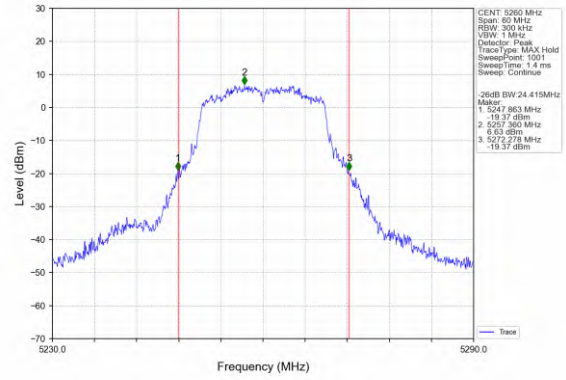


802.11n(HT20)_MCH_5300MHz_Ant1_NTNV

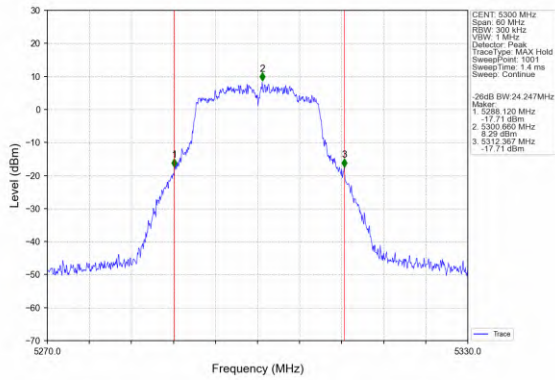


802.11n(HT20)_MCH_5300MHz_Ant2_NTNV

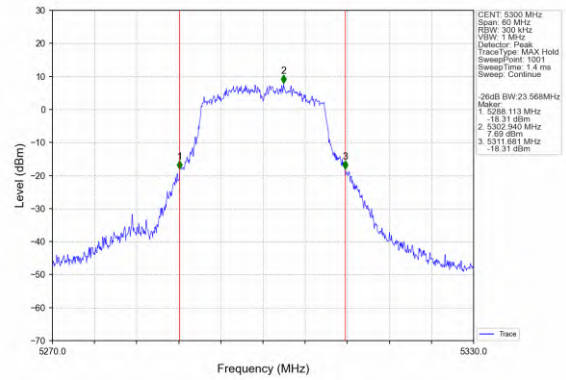


802.11n(HT20)_HCH_5320MHz_Ant1_NTNV

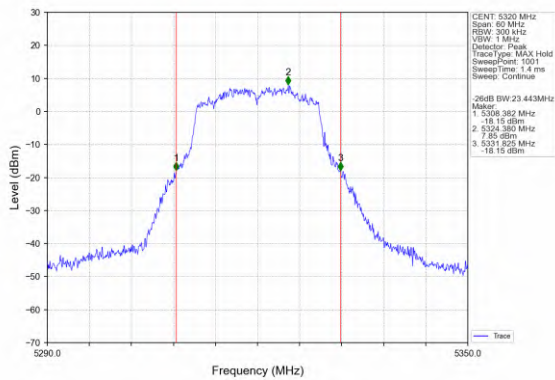


802.11n(HT20)_HCH_5320MHz_Ant2_NTNV

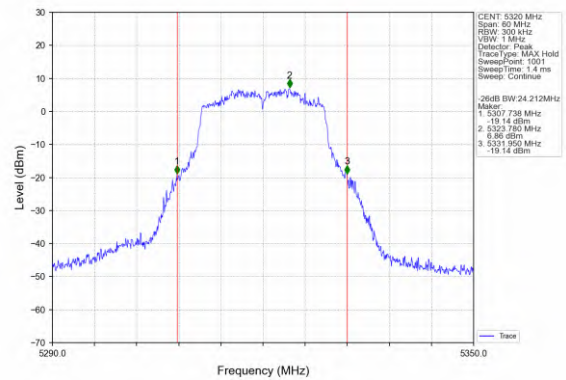


802.11n(HT20)_LCH_5500MHz_Ant1_NTNV

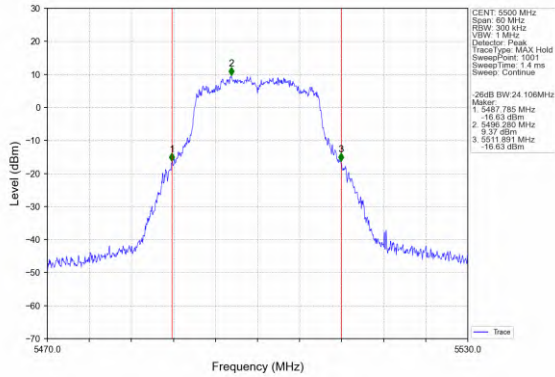


802.11n(HT20)_LCH_5500MHz_Ant2_NTNV

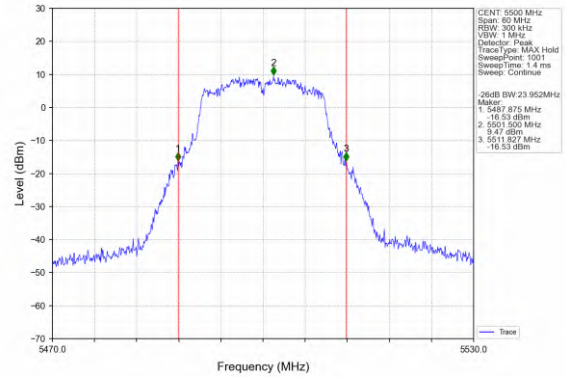


802.11n(HT20)_MCH_5580MHz_Ant1_NTNV

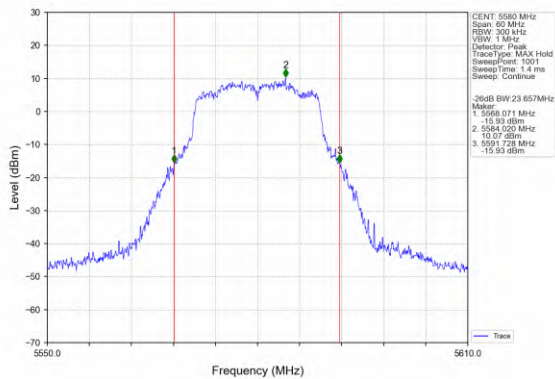


802.11n(HT20)_MCH_5580MHz_Ant2_NTNV

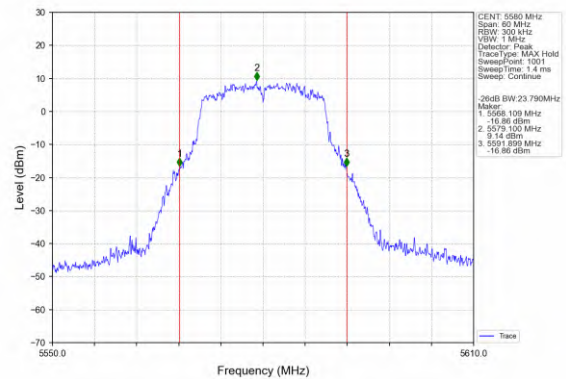


802.11n(HT20)_HCH_5700MHz_Ant1_NTNV

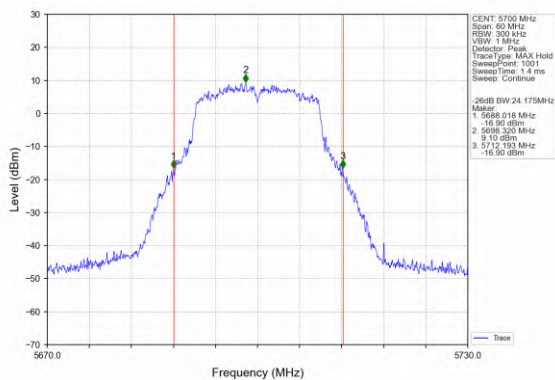


802.11n(HT20)_HCH_5700MHz_Ant2_NTNV

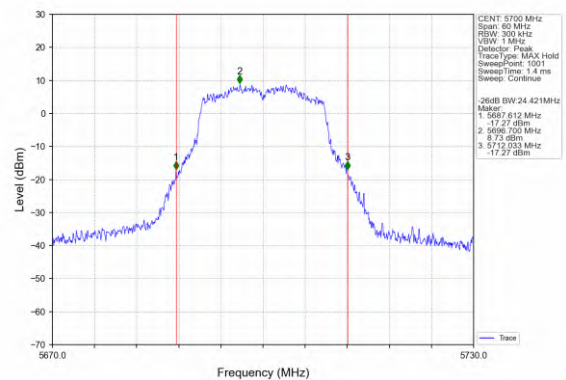


802.11n(HT40)_LCH_5190MHz_Ant1_NTNV

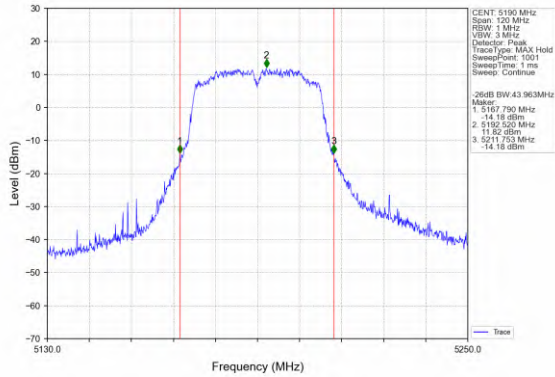


802.11n(HT40)_LCH_5190MHz_Ant2_NTNV

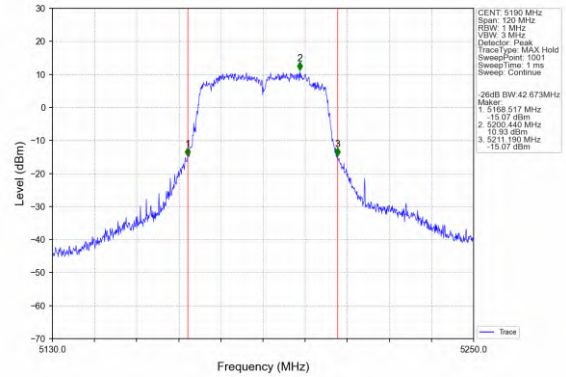


802.11n(HT40)_HCH_5230MHz_Ant1_NTNV

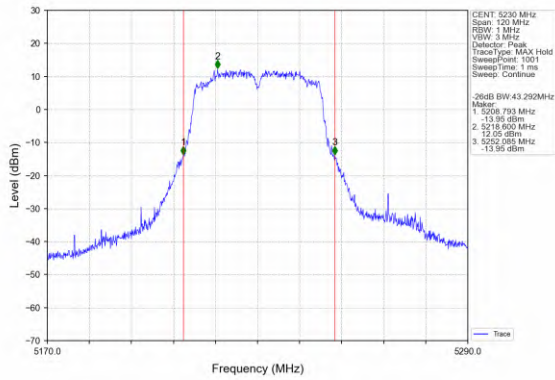


802.11n(HT40)_HCH_5230MHz_Ant2_NTNV

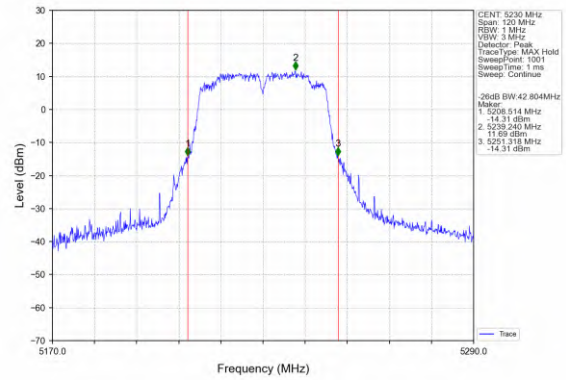


802.11n(HT40)_LCH_5270MHz_Ant1_NTNV

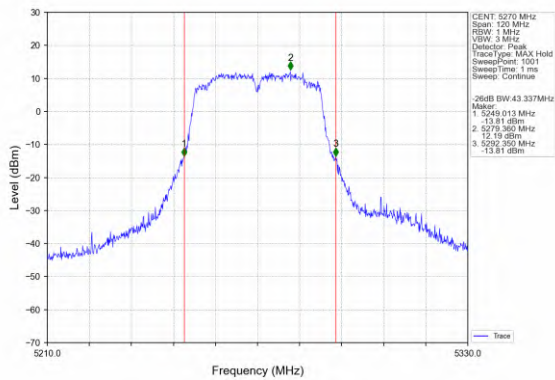


802.11n(HT40)_LCH_5270MHz_Ant2_NTNV

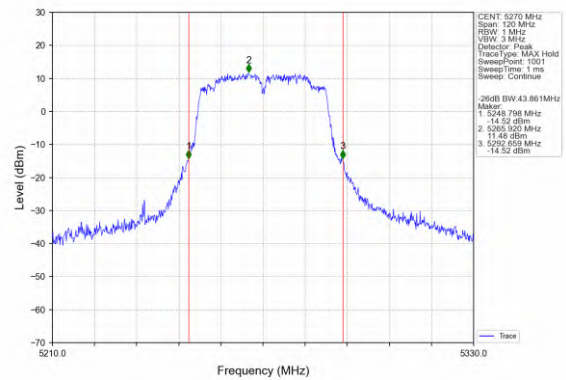


802.11n(HT40)_HCH_5310MHz_Ant1_NTNV

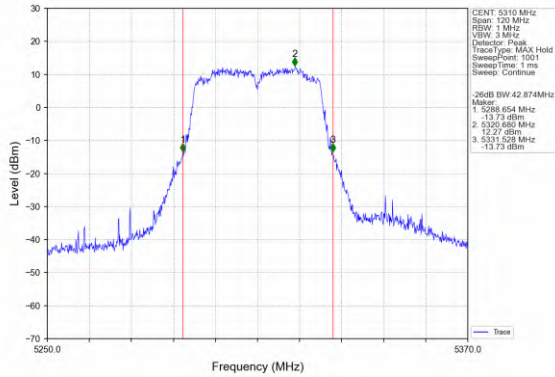


802.11n(HT40)_HCH_5310MHz_Ant2_NTNV

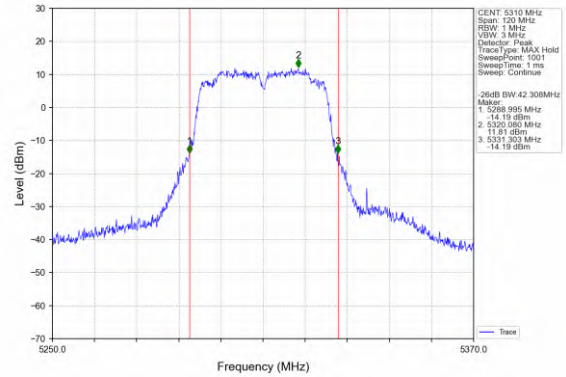


802.11n(HT40)_LCH_5510MHz_Ant1_NTNV

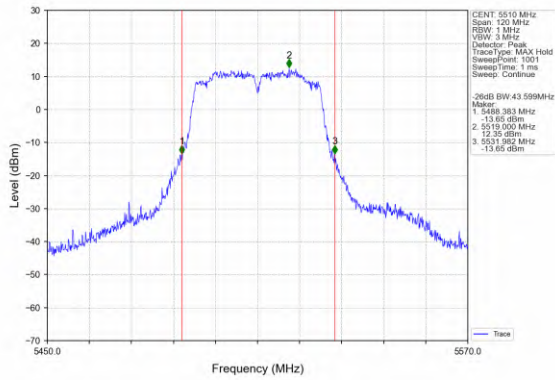


802.11n(HT40)_LCH_5510MHz_Ant2_NTNV

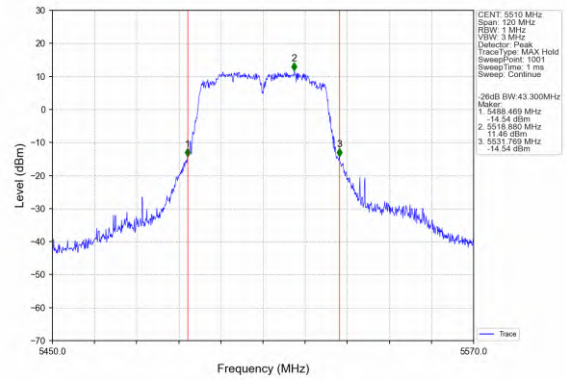


802.11n(HT40)_MCH_5550MHz_Ant1_NTNV

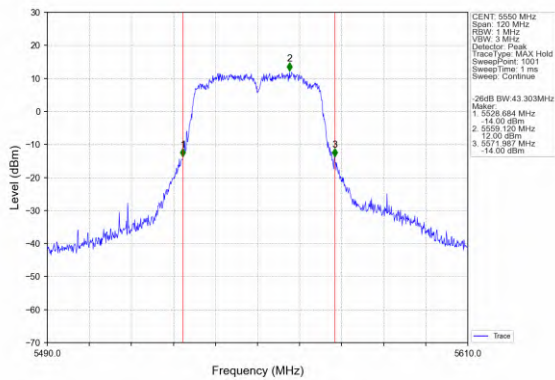


802.11n(HT40)_MCH_5550MHz_Ant2_NTNV

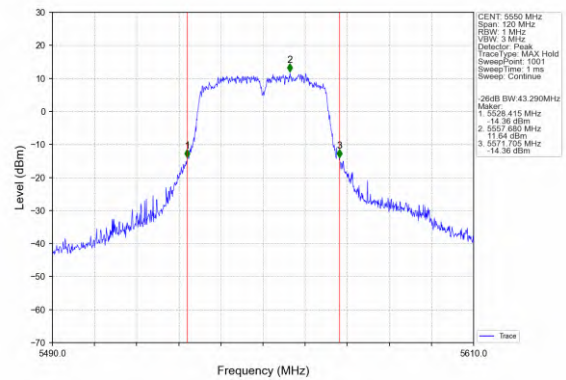


802.11n(HT40)_HCH_5670MHz_Ant1_NTNV

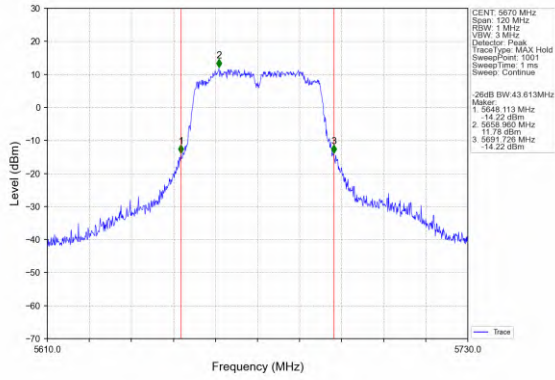


802.11n(HT40)_HCH_5670MHz_Ant2_NTNV

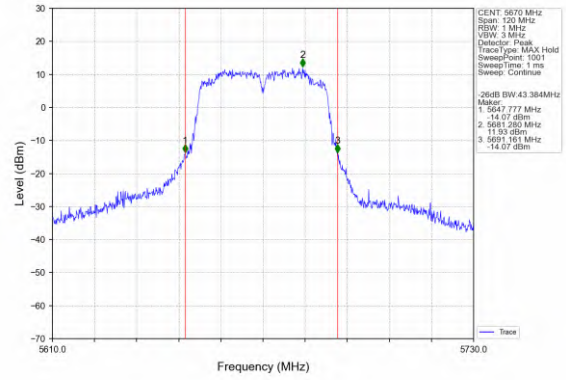


802.11ac(VHT20)_LCH_5180MHz_Ant1_NTNV

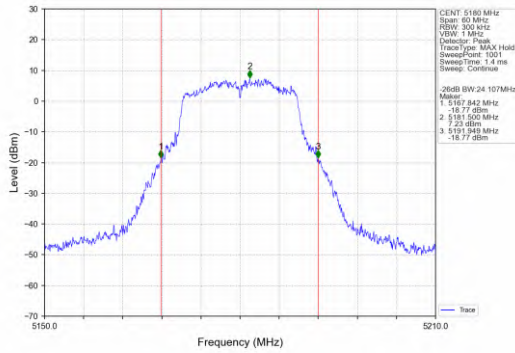


802.11ac(VHT20)_LCH_5180MHz_Ant2_NTNV

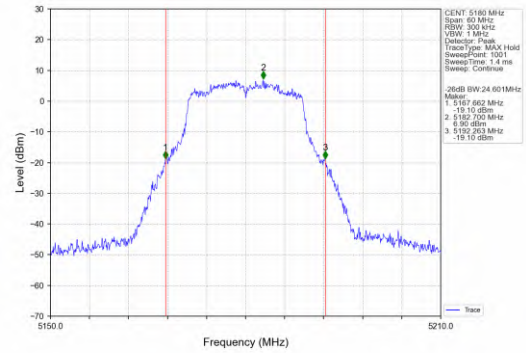


802.11ac(VHT20)_MCH_5200MHz_Ant1_NTNV

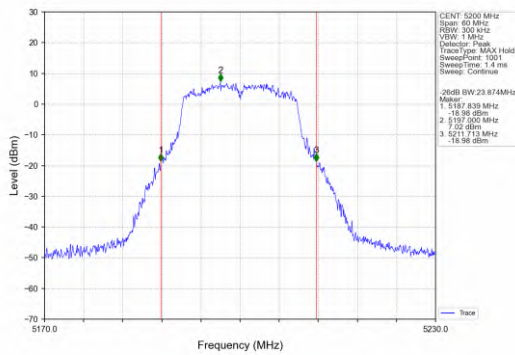


802.11ac(VHT20)_MCH_5200MHz_Ant2_NTNV

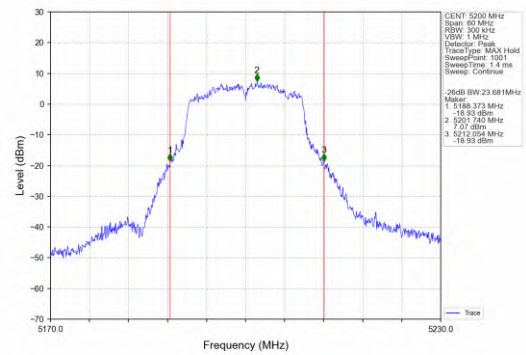


802.11ac(VHT20)_HCH_5240MHz_Ant1_NTNV

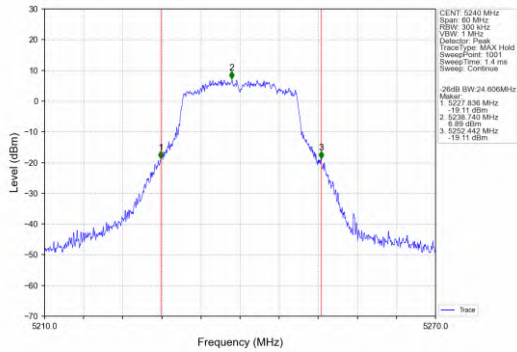


802.11ac(VHT20)_HCH_5240MHz_Ant2_NTNV

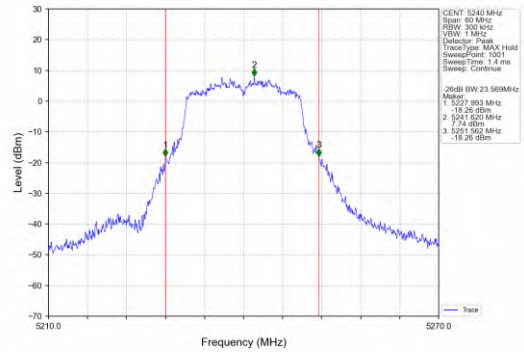


802.11ac(VHT20)_LCH_5260MHz_Ant1_NTNV

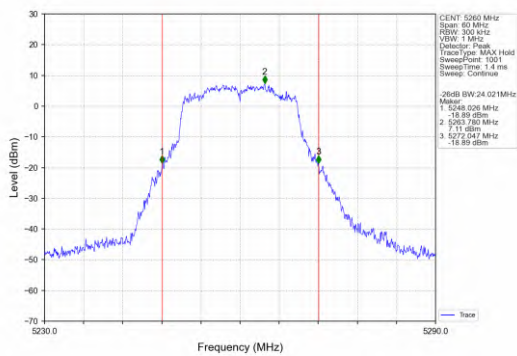


802.11ac(VHT20)_LCH_5260MHz_Ant2_NTNV

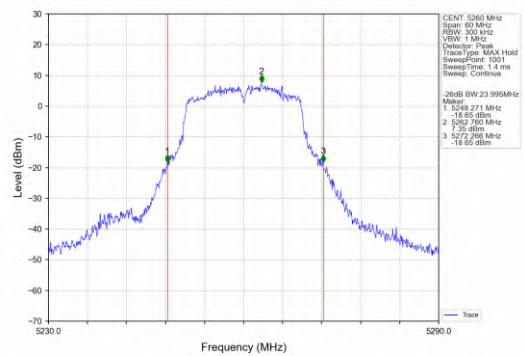


802.11ac(VHT20)_MCH_5300MHz_Ant1_NTNV

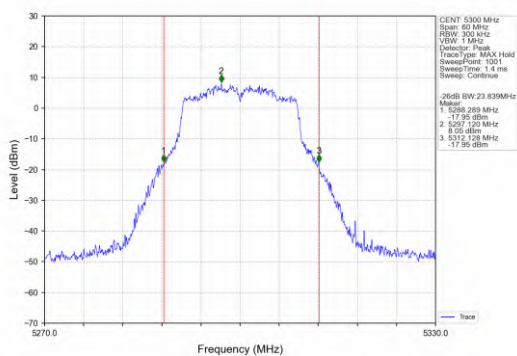


802.11ac(VHT20)_MCH_5300MHz_Ant2_NTNV

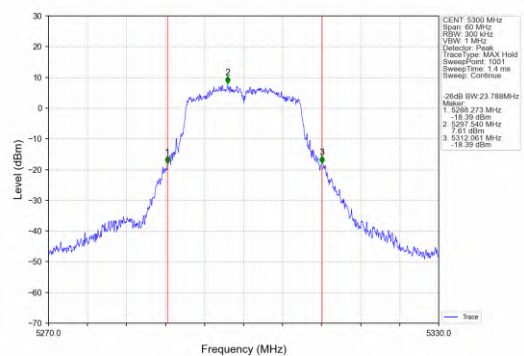


802.11ac(VHT20)_HCH_5320MHz_Ant1_NTNV

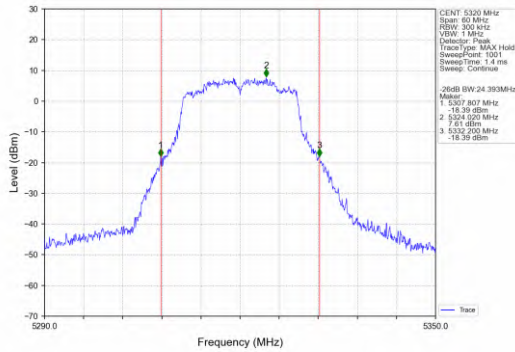


802.11ac(VHT20)_HCH_5320MHz_Ant2_NTNV

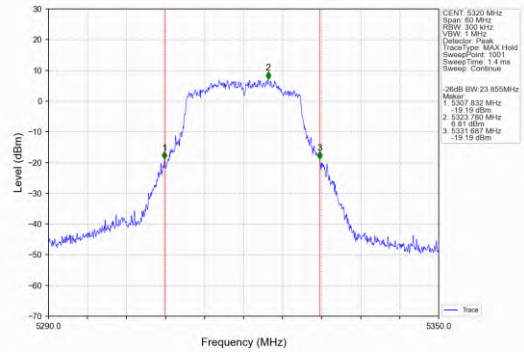


802.11ac(VHT20)_LCH_5500MHz_Ant1_NTNV

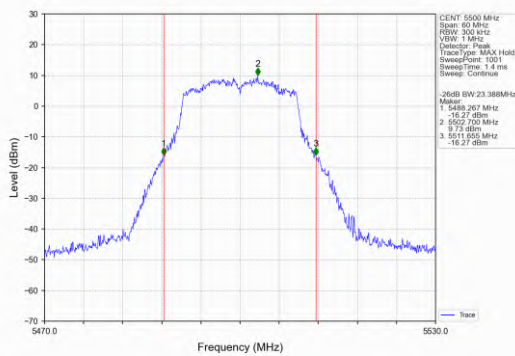


802.11ac(VHT20)_LCH_5500MHz_Ant2_NTNV

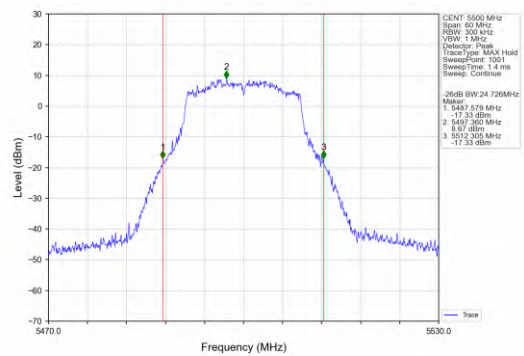


802.11ac(VHT20)_MCH_5580MHz_Ant1_NTNV

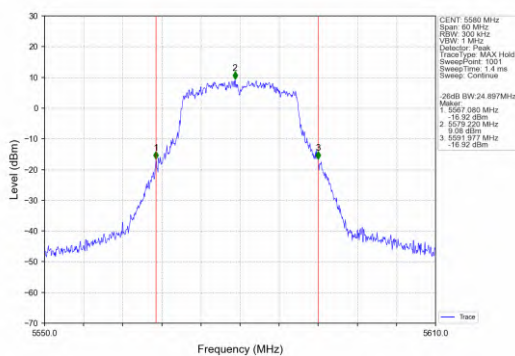


802.11ac(VHT20)_MCH_5580MHz_Ant2_NTNV

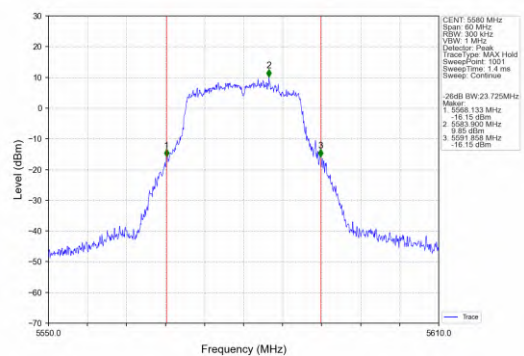


802.11ac(VHT20)_HCH_5700MHz_Ant1_NTNV

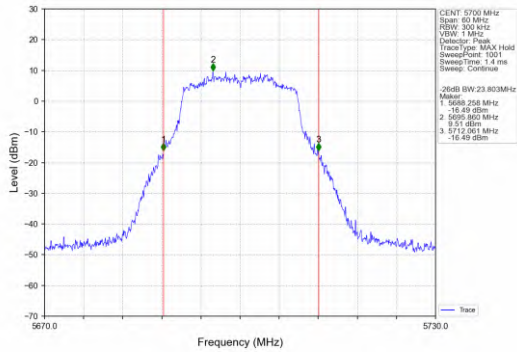


802.11ac(VHT20)_HCH_5700MHz_Ant2_NTNV

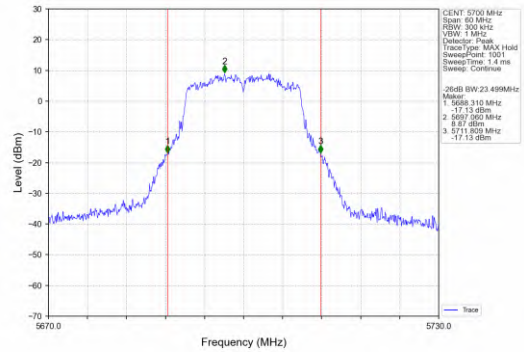


802.11ac(VHT40)_LCH_5190MHz_Ant1_NTNV

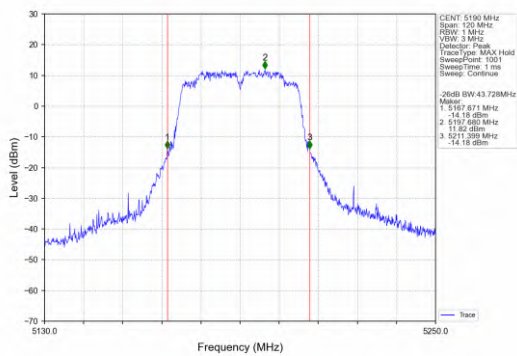


802.11ac(VHT40)_LCH_5190MHz_Ant2_NTNV

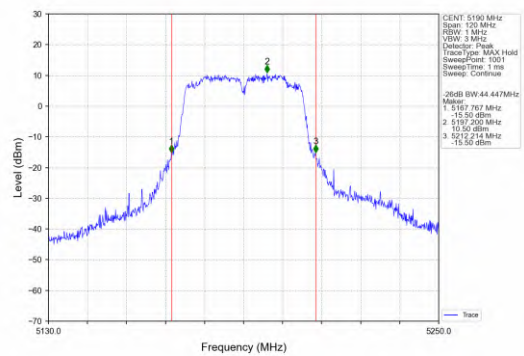


802.11ac(VHT40)_HCH_5230MHz_Ant1_NTNV

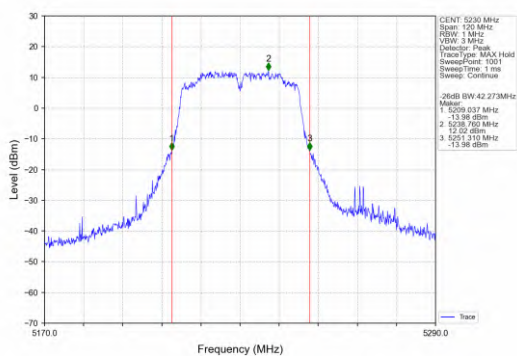


802.11ac(VHT40)_HCH_5230MHz_Ant2_NTNV

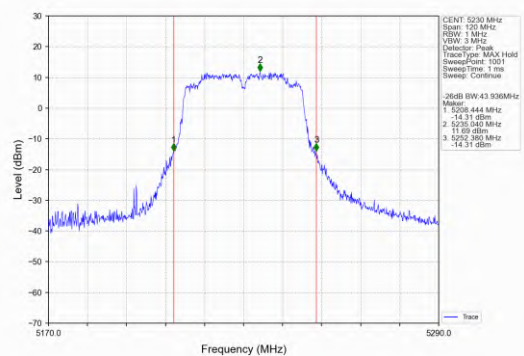


802.11ac(VHT40)_LCH_5270MHz_Ant1_NTNV

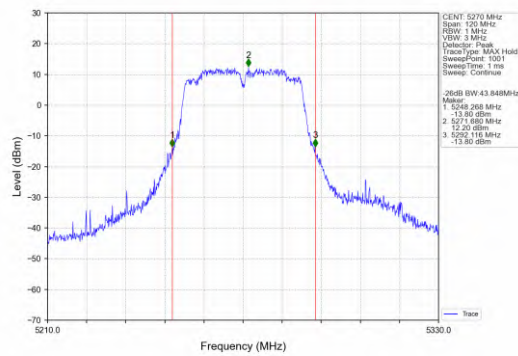


802.11ac(VHT40)_LCH_5270MHz_Ant2_NTNV

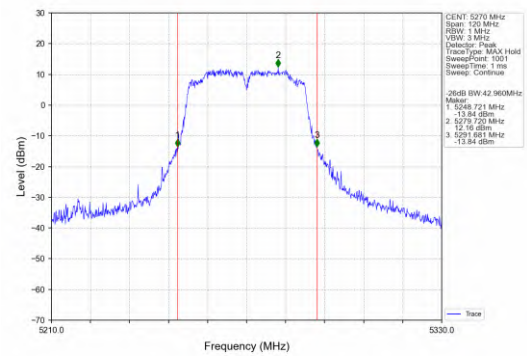


802.11ac(VHT40)_HCH_5310MHz_Ant1_NTNV

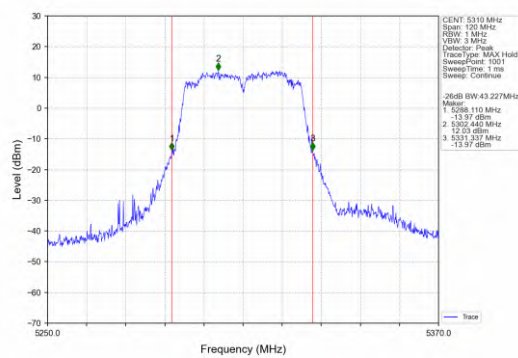


802.11ac(VHT40)_HCH_5310MHz_Ant2_NTNV

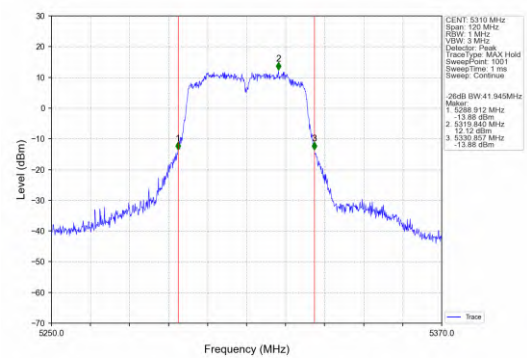


802.11ac(VHT40)_LCH_5510MHz_Ant1_NTNV

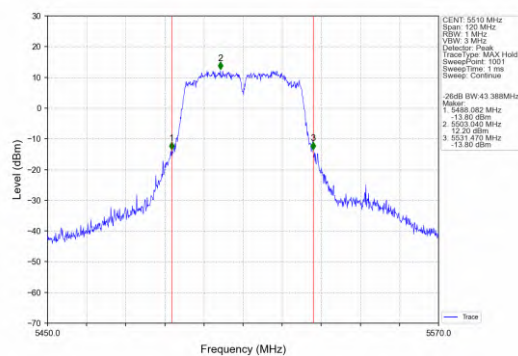


802.11ac(VHT40)_LCH_5510MHz_Ant2_NTNV

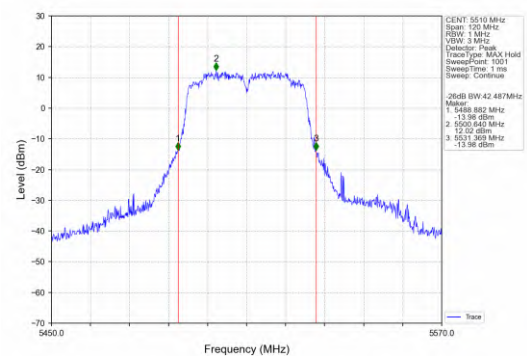


802.11ac(VHT40)_MCH_5550MHz_Ant1_NTNV

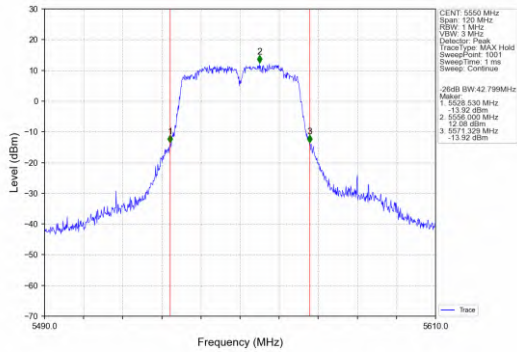


802.11ac(VHT40)_MCH_5550MHz_Ant2_NTNV

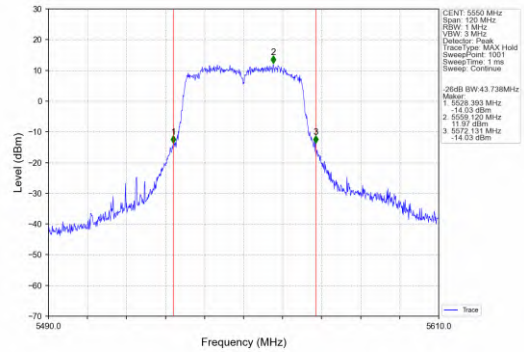


802.11ac(VHT40)_HCH_5670MHz_Ant1_NTNV

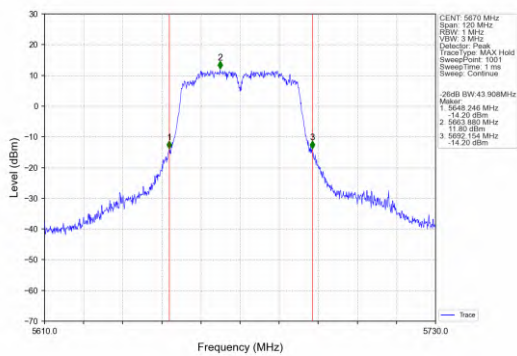


802.11ac(VHT40)_HCH_5670MHz_Ant2_NTNV

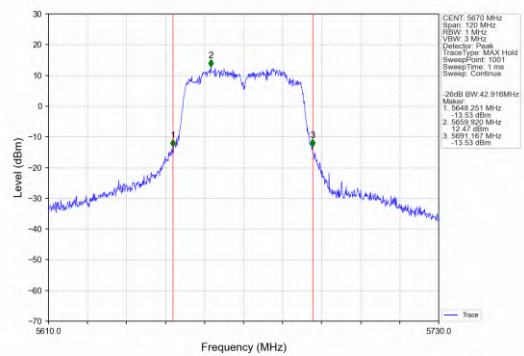


802.11ac(VHT80)_MCH_5210MHz_Ant1_NTNV

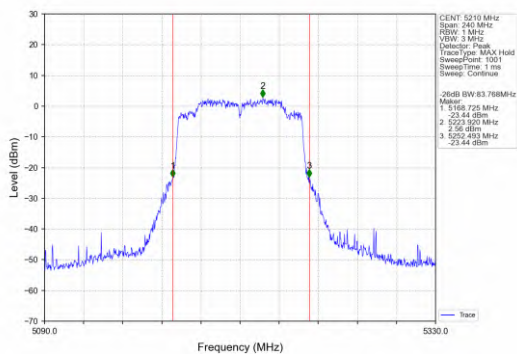


802.11ac(VHT80)_MCH_5210MHz_Ant2_NTNV

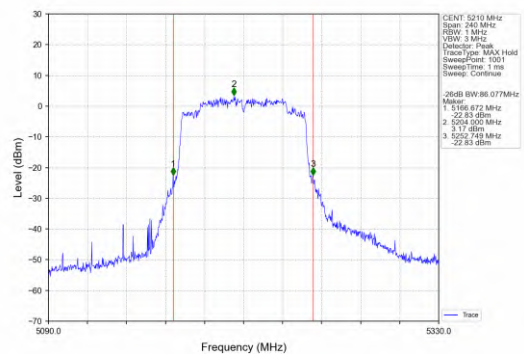


802.11ac(VHT80)_MCH_5290MHz_Ant1_NTNV

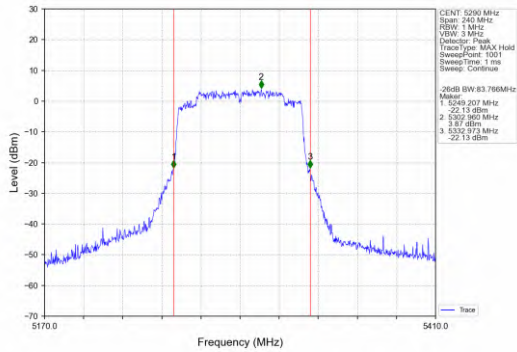


802.11ac(VHT80)_MCH_5290MHz_Ant2_NTNV

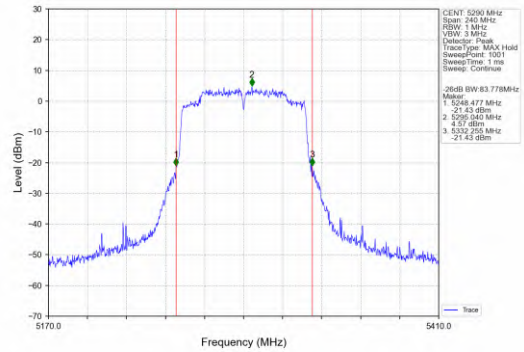


802.11ac(VHT80)_LCH_5530MHz_Ant1_NTNV

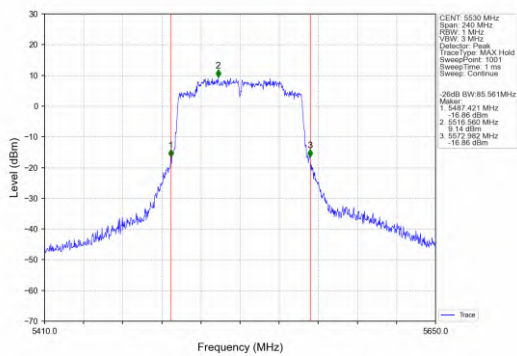


802.11ac(VHT80)_LCH_5530MHz_Ant2_NTNV

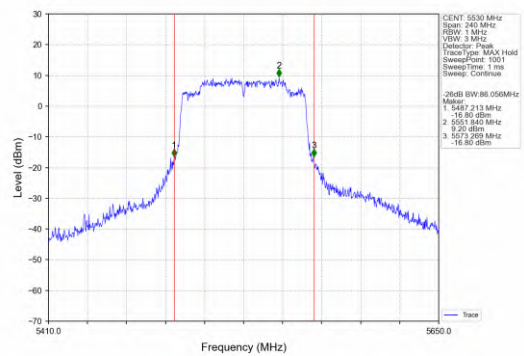


802.11ac(VHT80)_HCH_5610MHz_Ant1_NTNV

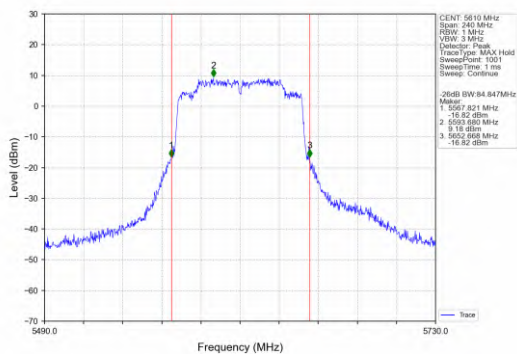


802.11ac(VHT80)_HCH_5610MHz_Ant2_NTNV

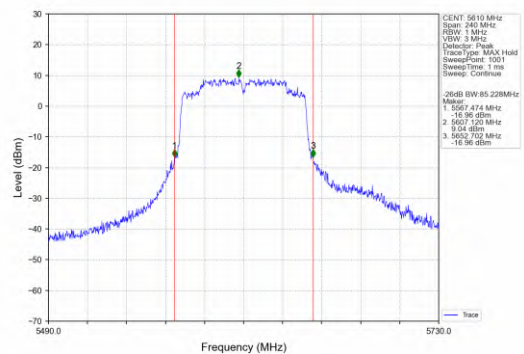


802.11ac(VHT160)_MCH_5250MHz_Ant1_NTNV

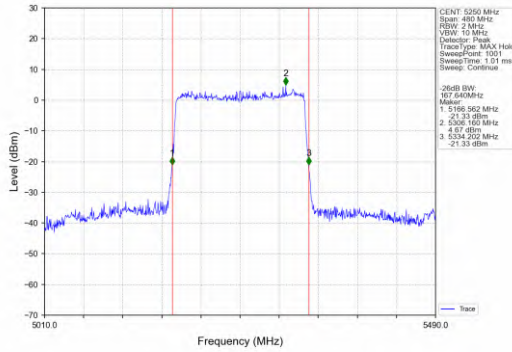


802.11ac(VHT160)_MCH_5250MHz_Ant2_NTNV

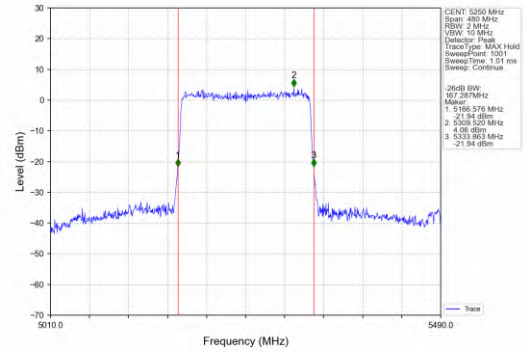


802.11ac(VHT160)_MCH_5570MHz_Ant1_NTNV

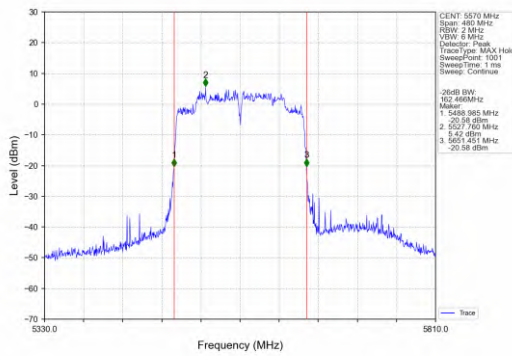


802.11ac(VHT160)_MCH_5570MHz_Ant2_NTNV

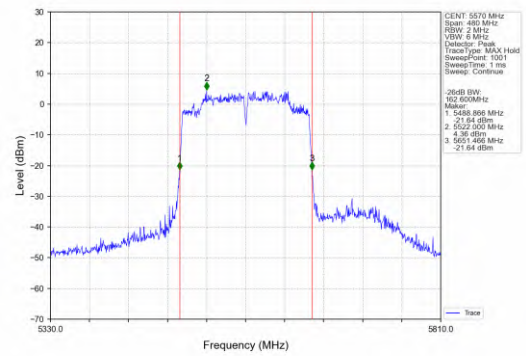


802.11ax(HEW20)_LCH_5180MHz_SU_ / _Ant1_NTNV

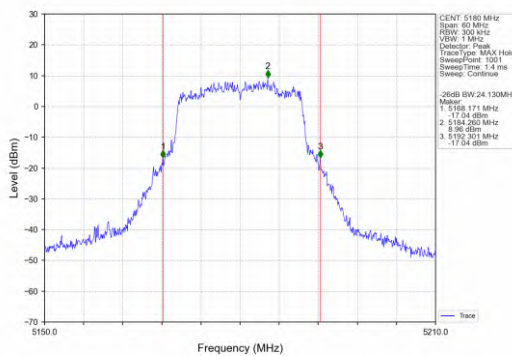


802.11ax(HEW20)_LCH_5180MHz_SU_ / _Ant2_NTNV

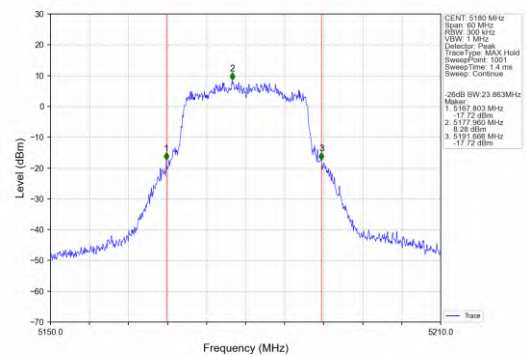


802.11ax(HEW20)_MCH_5200MHz_SU_ / _Ant1_NTNV

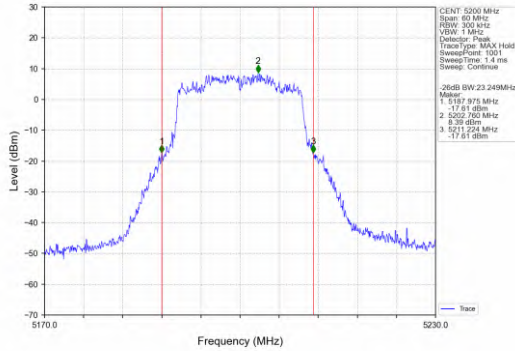


802.11ax(HEW20)_MCH_5200MHz_SU_ / _Ant2_NTNV

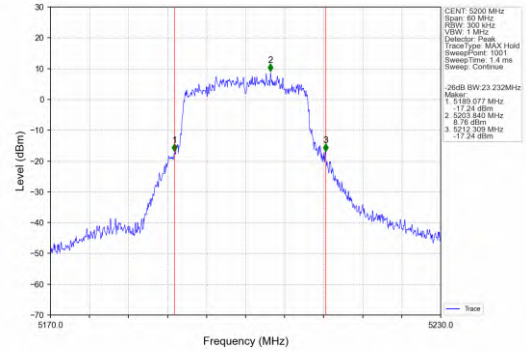


802.11ax(HEW20)_HCH_5240MHz_SU_ / _Ant1_NTNV

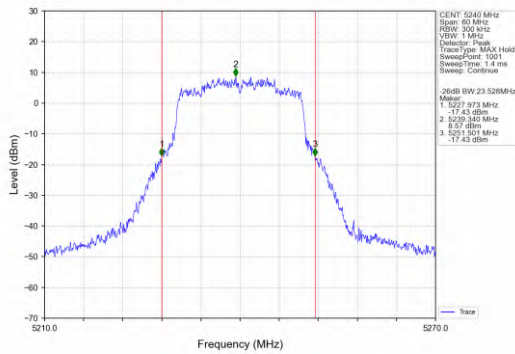


802.11ax(HEW20)_HCH_5240MHz_SU_ / _Ant2_NTNV

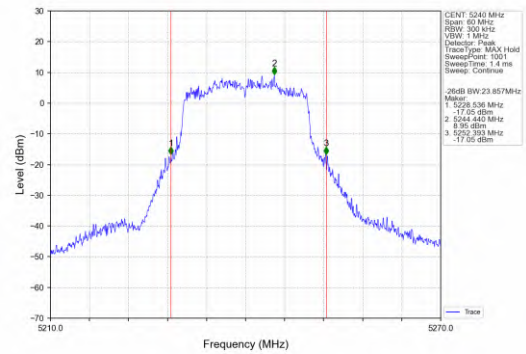


802.11ax(HEW20)_LCH_5260MHz_SU_ / _Ant1_NTNV

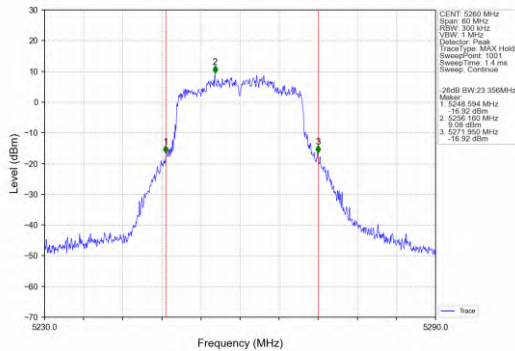


802.11ax(HEW20)_LCH_5260MHz_SU_ / _Ant2_NTNV

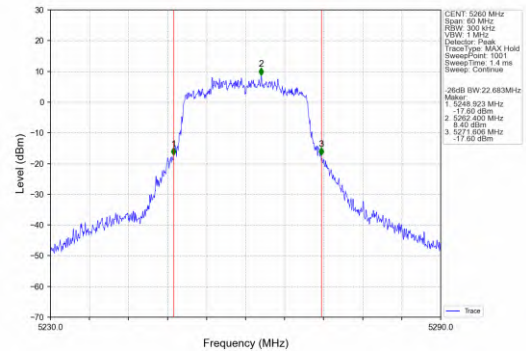


802.11ax(HEW20)_MCH_5300MHz_SU_ / _Ant1_NTNV

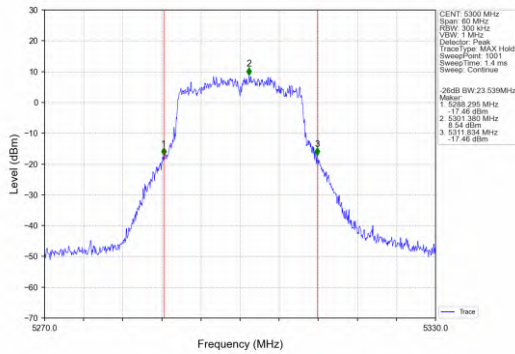


802.11ax(HEW20)_MCH_5300MHz_SU_ / _Ant2_NTNV

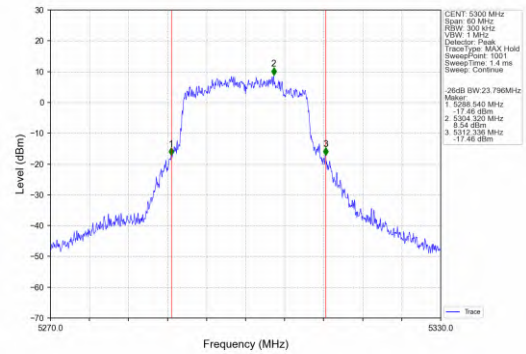


802.11ax(HEW20)_HCH_5320MHz_SU_ / _Ant1_NTNV

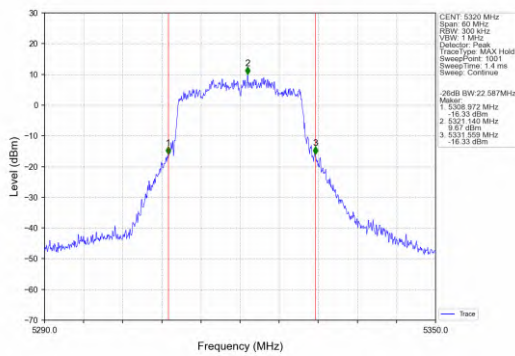


802.11ax(HEW20)_HCH_5320MHz_SU_ / _Ant2_NTNV

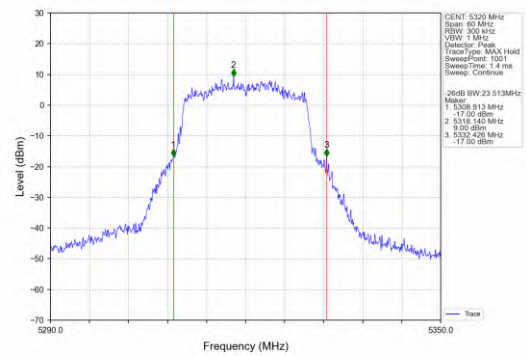


802.11ax(HEW20)_LCH_5500MHz_SU_ / _Ant1_NTNV

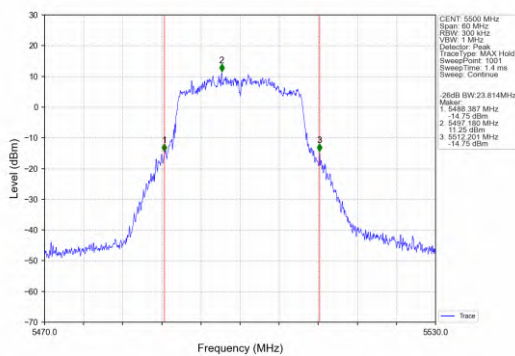


802.11ax(HEW20)_LCH_5500MHz_SU_ / _Ant2_NTNV

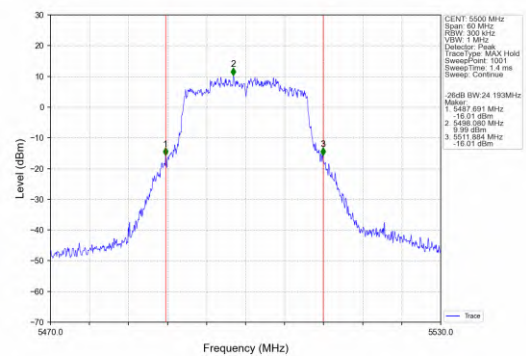


802.11ax(HEW20)_MCH_5580MHz_SU_/_Ant1_NTNV

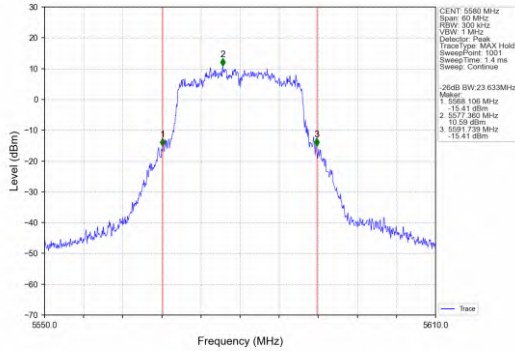


802.11ax(HEW20)_MCH_5580MHz_SU_/_Ant2_NTNV

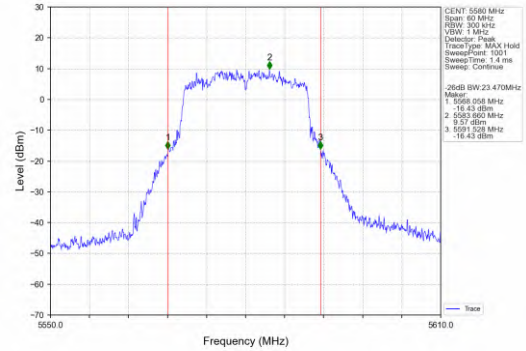


802.11ax(HEW20)_HCH_5700MHz_SU_/_Ant1_NTNV

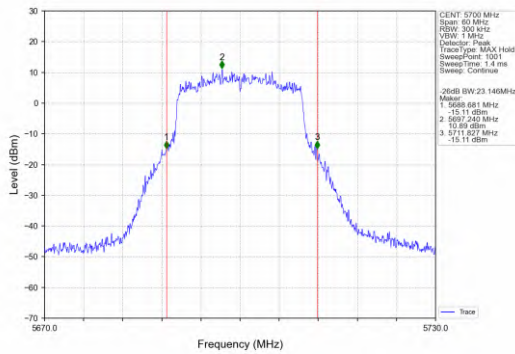

802.11ax(HEW20)_HCH_5700MHz_SU_/_Ant2_NTNV

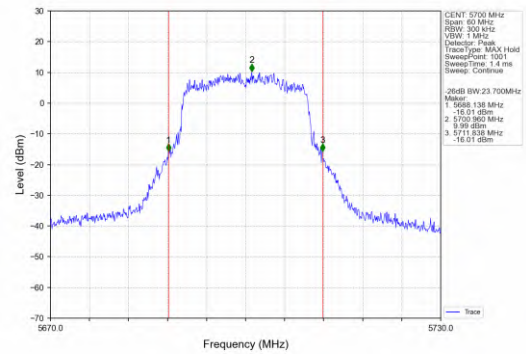

802.11ax(HEW40)_LCH_5190MHz_SU_/_Ant1_NTNV

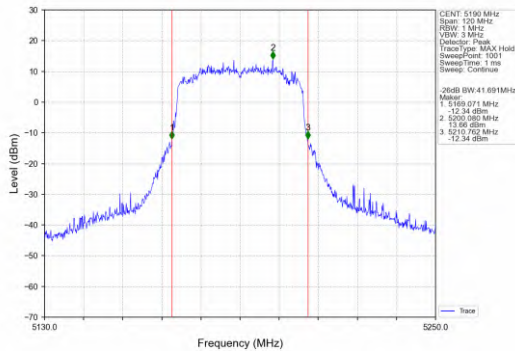

802.11ax(HEW40)_LCH_5190MHz_SU_/_Ant2_NTNV

