


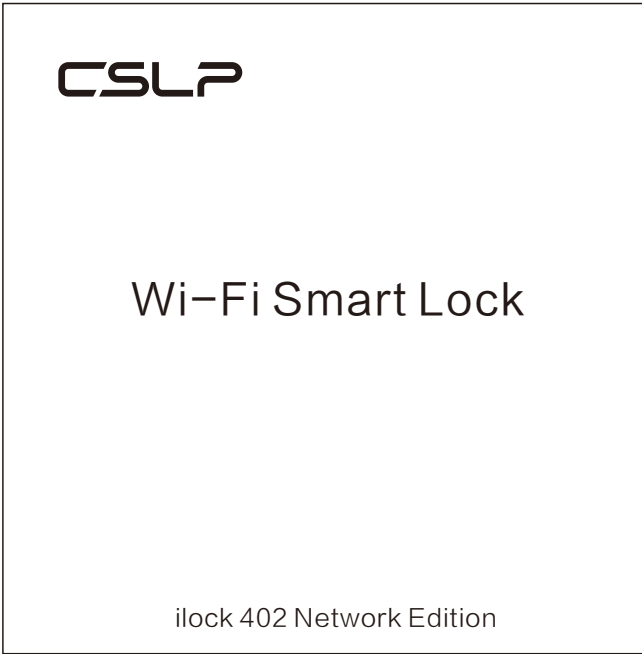

The diagram shows the front and back views of the 12300 mobile phone. The front view (left) features a fingerprint sensor at the top, a numeric keypad (1-9, *, 0, #), a 'Return' key, and a 'Keyhole' at the bottom. The back view (right) shows a 'Door magnet' at the top, a 'Battery cover' latch, and a 'Lock knob' at the bottom.

1

working voltage	Standard voltage 6.5~8.4V
System standby time	> 3000 times
Emergency electrical power supply	5V, power supply with USB interface
Recognition speed	<1S
Low electricity prompt	<20% battery capacity
Password capacity	150 groups
Fingerprint capacity	50 group

3



6

7

8

9

9

- ① Interior Assembly
- ② Opening The Template
- ③ Touchpad Assembly
- ④ Steike Screws(4)&Deadbolt Screws(2)
- ⑤ Mounting Plate
- ⑥ Mounting Screws(8)
- ⑦ Key (2)
- ⑧ Door Magnet
- ⑨ Deadbolt Assbmly & Strike Plate

10

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.