

TEST REPORT

Report No.: BCTC2111202916-4E

Applicant: ROCKPI TRADING LIMITED

Product Name: Radxa CM3

Model/Type Ref.: RM116-D8E32W

Tested Date: 2021-11-03 to 2021-11-16

Issued Date: 2021-11-17

Shenzhen BCTC Testing Co., Ltd.



FCC ID:2A3PA-RADXA-CM3

Product Name: Radxa CM3
Trademark: N/A
Model/Type Ref.: RM116-D8E32W
RM116-D1E0W , RM116-D2E8W, RM116-D4E16W, RM116-D8E16W
Prepared For: ROCKPI TRADING LIMITED
Address: Room 11, 27/f, Ga wah international centre, 191 Javaroad, north point, Hong Kong, China
Manufacturer: ROCKPI TRADING LIMITED
Address: Room 11, 27/f, Ga wah international centre, 191 Javaroad, north point, Hong Kong, China
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: 2021-11-03
Sample tested Date: 2021-11-03 to 2021-11-16
Issue Date: 2021-11-17
Report No.: BCTC2111202916-4E
FCC Part15 15.407
Test Standards: ANSI C63.10-2013
KDB 662911 D01 v02r01
KDB 789033 D02 v02r01
Test Results: PASS

Tested by:



Lei Chen/Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information And Test Setup	8
4.1 Product Information	8
4.2 Test Setup Configuration	8
4.3 Support Equipment	9
4.4 Channel List	9
4.5 Test Mode	9
4.6 Table Of Parameters Of Text Software Setting	10
5. Test Facility And Test Instrument Used	11
5.1 Test Facility	11
5.2 Test Instrument Used	11
6. Conducted Emissions	13
6.1 Block Diagram Of Test Setup	13
6.2 Limit	13
6.3 Test Procedure	13
6.4 EUT Operating Conditions	13
6.5 Test Result	14
7. Radiated Emissions	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	17
7.3 Test Procedure	18
7.4 EUT Operating Conditions	19
7.5 Test Result	19
8. Power Spectral Density Test	28
8.1 Block Diagram Of Test Setup	28
8.2 Limit	28
8.3 Test Procedure	29
8.4 EUT Operating Conditions	29
8.5 Test Result	30
9. 26dB & 99% Emission Bandwidth	34
9.1 Block Diagram Of Test Setup	34
9.2 Limit	34
9.3 Test Procedure	34
9.4 EUT Operating Conditions	34
9.5 Test Result	35
10. Maximum Conducted Output Power	39

10.1	Block Diagram Of Test Setup	39
10.2	Limit	39
10.3	Test Procedure	39
10.4	EUT Operating Conditions	40
10.5	Test Result	41
11.	Out Of Band Emissions	42
11.1	Block Diagram Of Test Setup	42
11.2	Limit	42
11.3	Test Procedure	42
11.4	EUT Operating Conditions	42
11.5	Test Result	43
12.	Spurious RF Conducted Emissions	46
12.1	Block Diagram Of Test Setup	46
12.2	Limit	46
12.3	Test Procedure	46
12.4	Test Result	46
13.	Frequency Stability Measurement	54
13.1	Block Diagram Of Test Setup	54
13.2	Limit	54
13.3	Test Procedure	54
13.4	Test Result	55
14.	Antenna Requirement	58
14.1	Limit	58
14.2	EUT Antenna	58
15.	EUT Photographs	59
16.	EUT Test Setup Photographs	60

(Note: N/A Means Not Applicable)

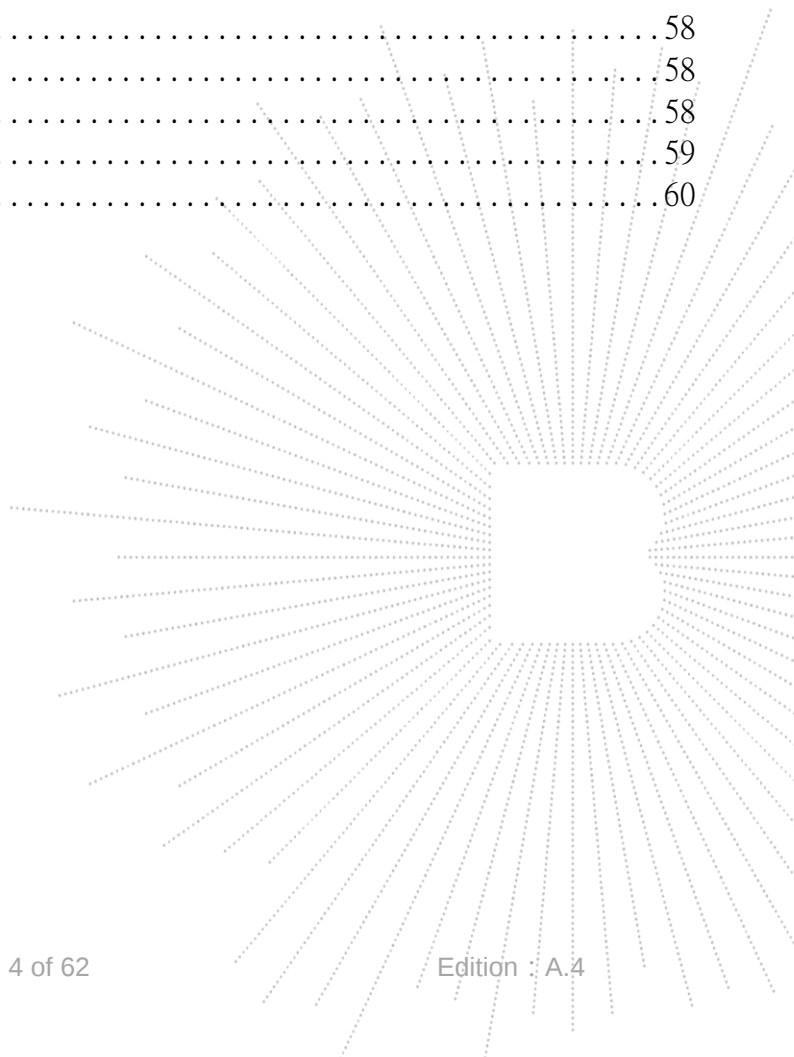

1. Version

Report No.	Issue Date	Description	Approved
BCTC2111202916-4E	2021-11-17	Original	Valid

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No	Results
1	Spurious Radiated Emissions	15.209(a), 15.407 (b)(1) 15.407 (b)(9)	PASS
2	Conducted Emission	15.207	PASS
3	26 dB and 99% Emission Bandwidth	15.407 (a)(12) 15.1049	PASS
4	Maximum Conducted Output Power	15.407 (a)(1)	PASS
5	Band Edge	2.1051, 15.407(b)(1)	PASS
6	Power Spectral Density	15.407 (a)(1)	PASS
7	Antenna Requirement	15.203	PASS
8	Frequency Stability	15.407(g)	PASS

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(9KHz-30MHz)	U=3.7dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission (150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

4. Product Information And Test Setup


4.1 Product Information

Model/Type Ref.:	RM116-D8E32W RM116-D1E0W , RM116-D2E8W, RM116-D4E16W, RM116-D8E16W
Model differences:	All the model are the same circuit and RF module, except model names and color.
IEEE 802.11 WLAN Mode Supported	802.11a/n/ac(20MHz channel bandwidth) 802.11n/ac(40MHz channel bandwidth) 802.11ac(80MHz channel bandwidth)
Operation Frequency:	5180-5240MHz for 802.11a/n(HT20)/ac20; 5190-5230MHz for 802.11n(HT40)/ac40; 5210MHz for 802.11 ac80;
Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS9
Type of Modulation:	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
Number Of Channel	4 channels for 802.11a/n20 in the 5180-5240MHz band ; 2 channels for 802.11 n40 in the 5190-5230MHz band ; 1 channels for 802.11 ac80 in the 5210MHz band ;
Antenna installation:	External antenna
Antenna Gain:	2dBi
Ratings:	DC 5V from USB


4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission:



Radiated Spurious Emission



4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	Radxa CM3	N/A	RM116-D8E32W	N/A	EUT
E-2	Adapter	N/A	BCTC001	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	0.5M	DC cable unshielded

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

802.11a/n/ac(20MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220	-	-	-	-
40	5200	48	5240	-	-	-	-

802.11n /ac(40MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	-	-	-	-	-	-
46	5230	-	-	-	-	-	-

802.11ac (80MHz) Carrier Frequency Channel	
Channel	Frequency (MHz)
42	5210

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11a / n/ ac 20 CH36/ CH40/ CH 48
Mode 2	802.11n/ ac40 CH38/ CH 46
Mode 3	802.11 ac80 CH 42
Mode 4	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11a / n/ ac 20 CH36/ CH40/ CH 48
Mode 2	802.11n/ ac40 CH38/ CH 46
Mode 3	802.11 ac80 CH 42


Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	SecureCRT		
Parameters	DEF	DEF	DEF

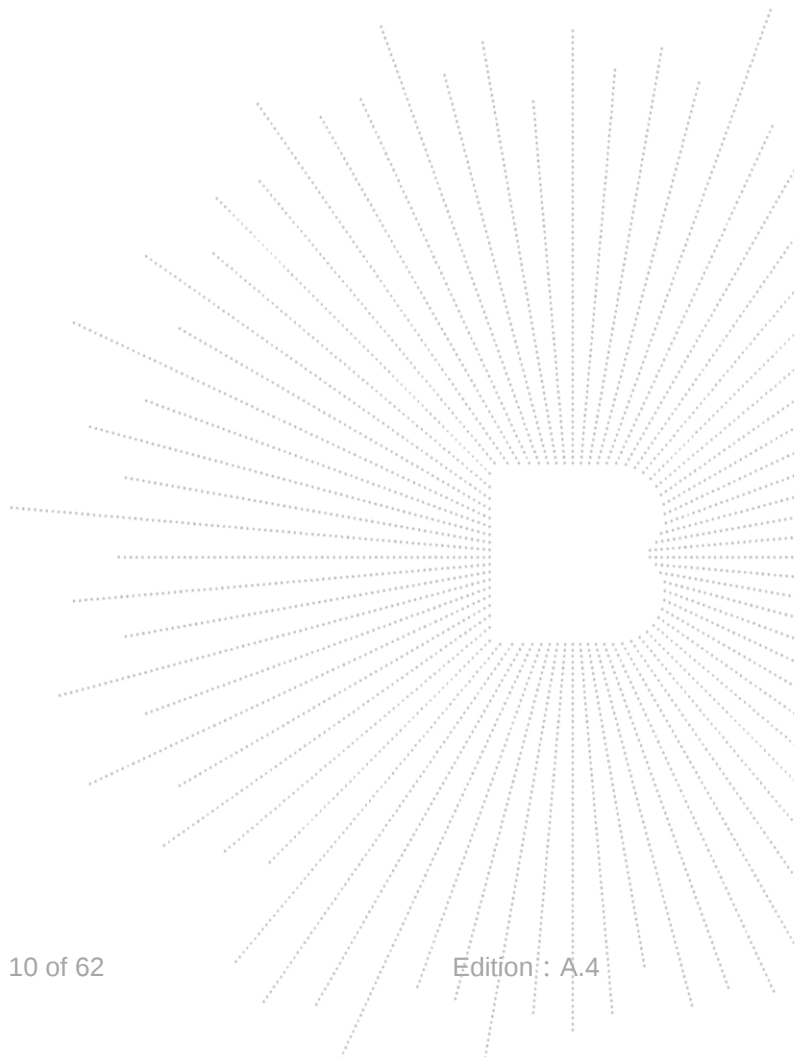

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583


5.2 Test Instrument Used

Conducted emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 28, 2021	May 27, 2022
LISN	R&S	ENV216	101375	May 28, 2021	May 27, 2022
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\

Radiated emissions Test (966 chamber)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	Jun. 06. 2020	Jun. 05, 2023
Receiver	R&S	ESR3	102075	May 28, 2021	May 27, 2022
Receiver	R&S	ESRP	101154	May 28, 2021	May 27, 2022
Amplifier	SKET	LAPA_01G18 G-45dB	\	May 28, 2021	May 27, 2022
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 28, 2021	May 27, 2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	Jun. 01, 2021	May 31, 2022
Horn Antenna	Schwarzbeck	BBHA9120D	1541	Jun. 02, 2021	Jun. 01, 2022
Horn Antenna (18GHz-40GHz)	Schwarzbeck	BBHA9170	00822	Jun. 15, 2021	Jun. 14, 2022
Amplifier (18GHz-40GHz)	MITEQ	TTA1840-35- HG	2034381	May 28, 2021	May 27, 2022
Loop Antenna (9kHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Jun. 02, 2021	Jun. 01, 2022
RF cables1 (9kHz-30MHz)	Huber+Suhnar	9kHz-30MHz	B1702988-00 08	May 28, 2021	May 27, 2022
RF cables2 (30MHz-1GHz)	Huber+Suhnar	30MHz-1GHz	1486150	May 28, 2021	May 27, 2022
RF cables3 (1GHz-40GHz)	Huber+Suhnar	1GHz-40GHz	1607106	May 28, 2021	May 27, 2022
Power Metter	Keysight	E4419	\	May 28, 2021	May 27, 2022
Power Sensor (AV)	Keysight	E9300A	\	May 28, 2021	May 27, 2022
Signal Analyzer 20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 28, 2021	May 27, 2022
Spectrum Analyzer 9kHz-40GHz	R&S	FSP 40	\	May 28, 2021	May 27, 2022
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

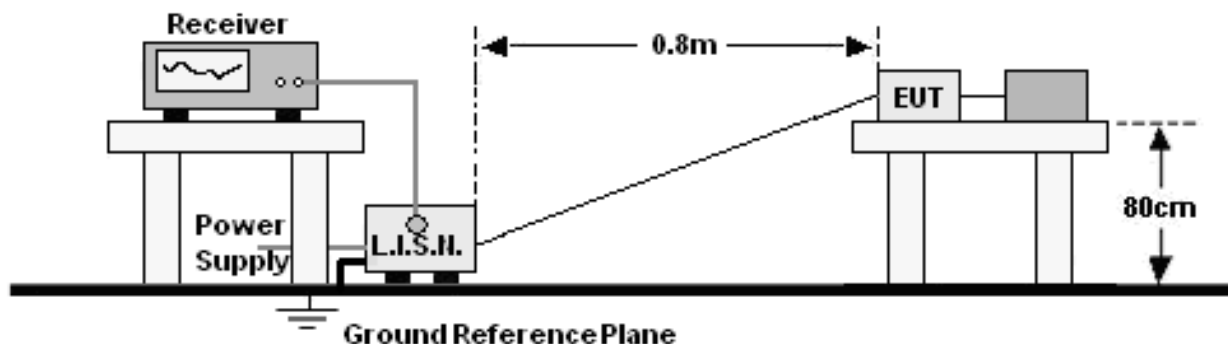

6.2 Limit

FREQUENCY (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

- *Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

6.3 Test Procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

6.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	Line
Test Voltage :	AC120/60Hz	Test Mode:	Mode 4

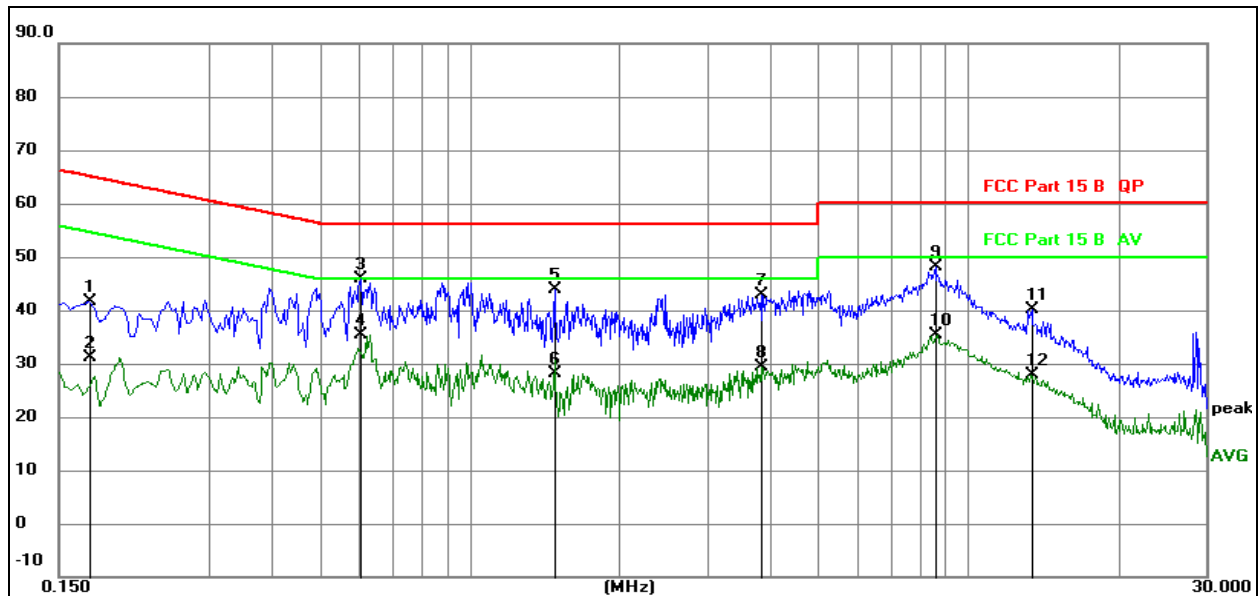


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No. Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	0.1722	22.09	19.61	41.70	64.85	-23.15	QP
2	0.1722	11.60	19.61	31.21	54.85	-23.64	AVG
3 *	0.6043	26.20	19.62	45.82	56.00	-10.18	QP
4	0.6043	15.67	19.62	35.29	46.00	-10.71	AVG
5	1.4796	24.16	19.63	43.79	56.00	-12.21	QP
6	1.4796	8.39	19.63	28.02	46.00	-17.98	AVG
7	3.8399	23.17	19.68	42.85	56.00	-13.15	QP
8	3.8399	9.64	19.68	29.32	46.00	-16.68	AVG
9	8.5917	28.47	19.77	48.24	60.00	-11.76	QP
10	8.5917	15.52	19.77	35.29	50.00	-14.71	AVG
11	13.3372	20.24	19.79	40.03	60.00	-19.97	QP
12	13.3372	8.02	19.79	27.81	50.00	-22.19	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	Neutral
Test Voltage :	AC120/60Hz	Test Mode:	Mode 4

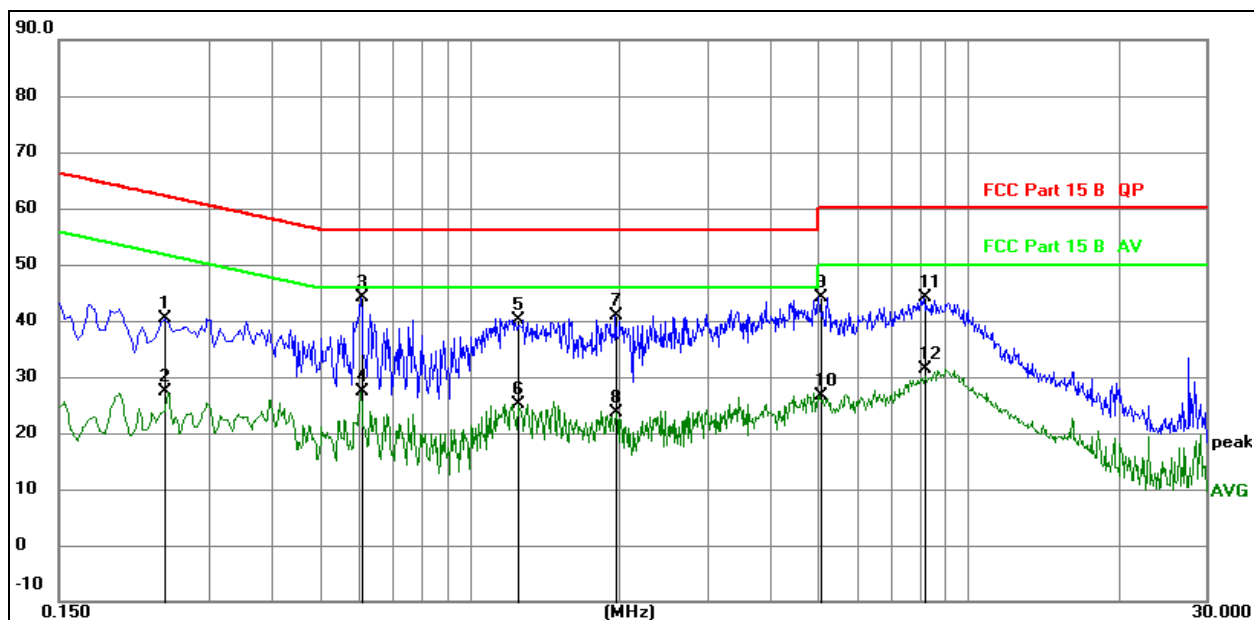

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No. Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	0.2445	20.80	19.61	40.41	61.94	-21.53	QP
2	0.2445	7.71	19.61	27.32	51.94	-24.62	AVG
3 *	0.6045	24.47	19.62	44.09	56.00	-11.91	QP
4	0.6045	7.79	19.62	27.41	46.00	-18.59	AVG
5	1.2525	20.38	19.63	40.01	56.00	-15.99	QP
6	1.2525	5.59	19.63	25.22	46.00	-20.78	AVG
7	1.9680	21.21	19.63	40.84	56.00	-15.16	QP
8	1.9680	3.97	19.63	23.60	46.00	-22.40	AVG
9	5.0370	24.52	19.71	44.23	60.00	-15.77	QP
10	5.0370	6.90	19.71	26.61	50.00	-23.39	AVG
11	8.1600	24.30	19.76	44.06	60.00	-15.94	QP
12	8.1600	11.59	19.76	31.35	50.00	-18.65	AVG


7. Radiated Emissions

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

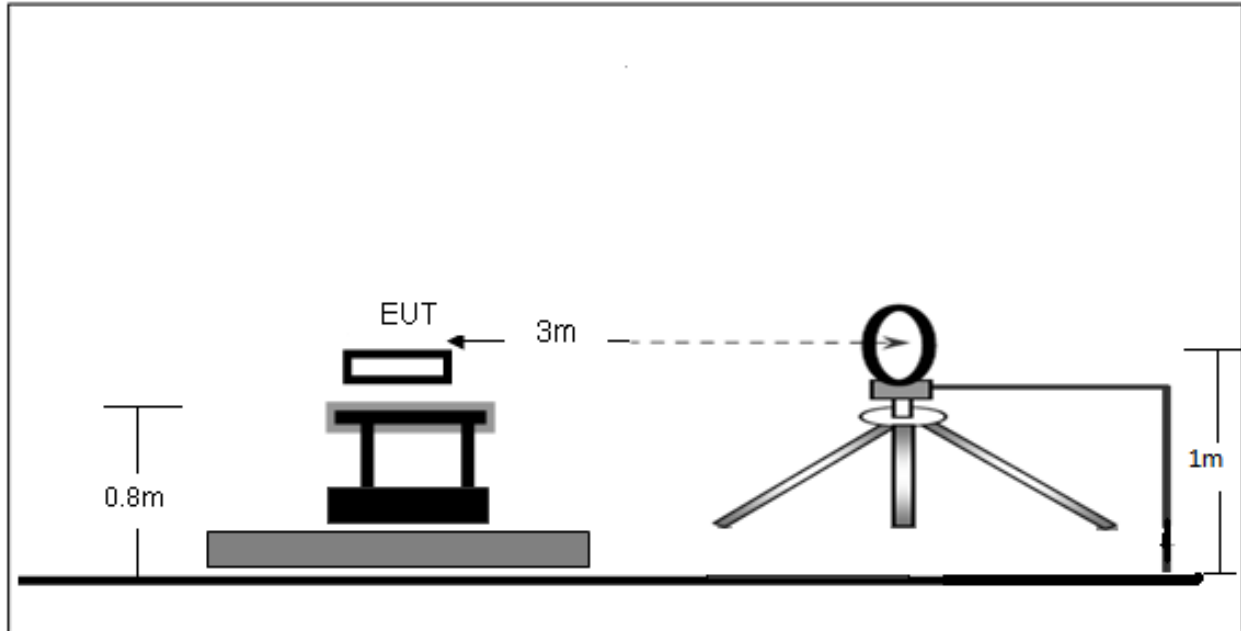

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

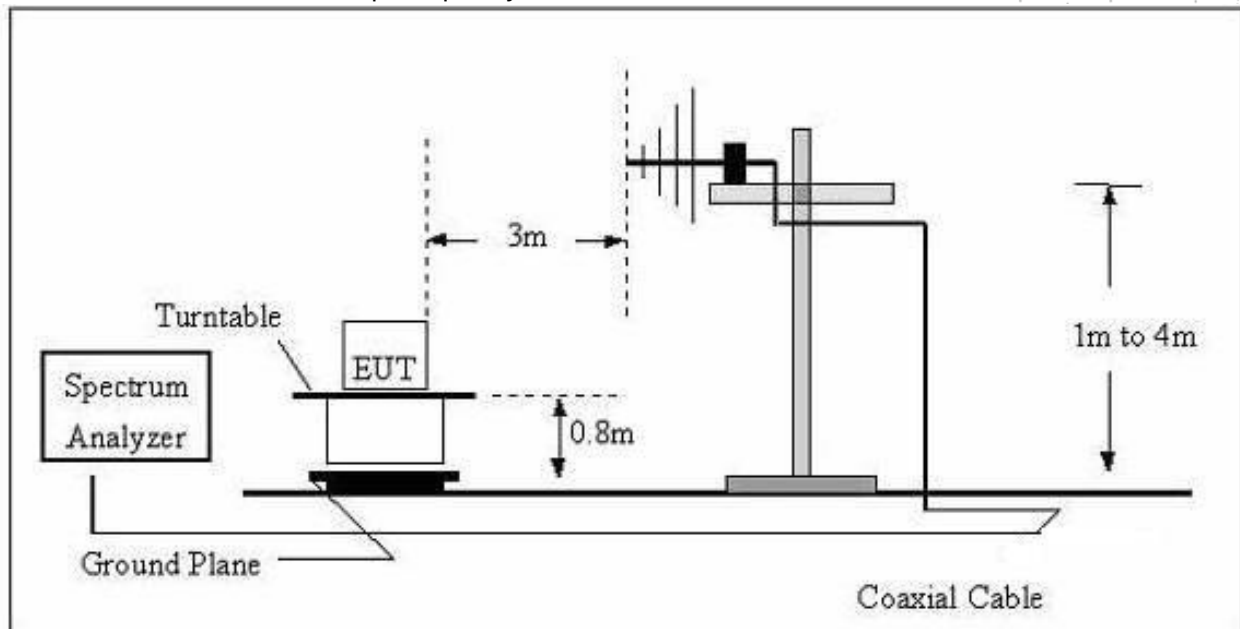

(C) Radiated Emission Test-Up Frequency Above 1GHz

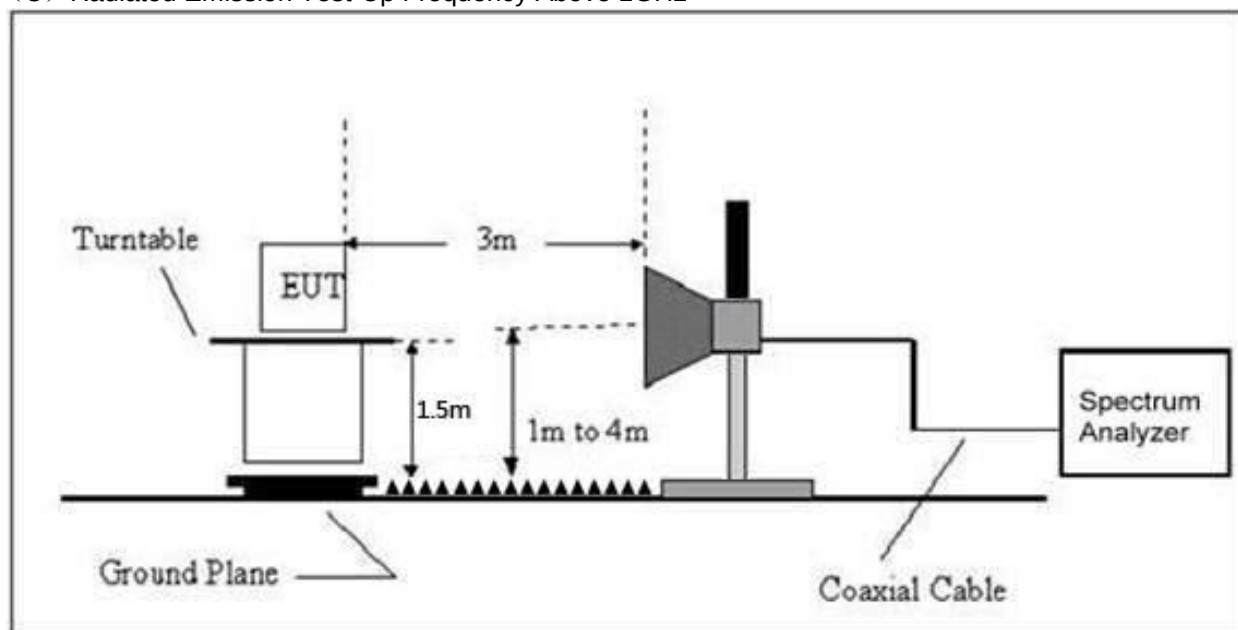

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency	Field Strength	Distance	Field Strength Limit at 3m Distance	
(MHz)	uV/m	(m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log(2400/F(\text{kHz})) + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log(24000/F(\text{kHz})) + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log(30) + 40$
30 ~ 88	100	3	100	$20\log(100)$
88 ~ 216	150	3	150	$20\log(150)$
216 ~ 960	200	3	200	$20\log(200)$
Above 960	500	3	500	$20\log(500)$

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

7.3 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205.

It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW} [kHz])$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	26℃	Relative Humidity:	24%
Pressure:	101 kPa	Test Voltage :	AC120/60Hz
Test Mode :	Mode 4	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})(\text{dB})$;

Limit line = specific limits(dBuv) + distance extrapolation factor.

Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Test Voltage :	AC120/60Hz
Test Mode :	Mode 4	Polarization :	Horizontal

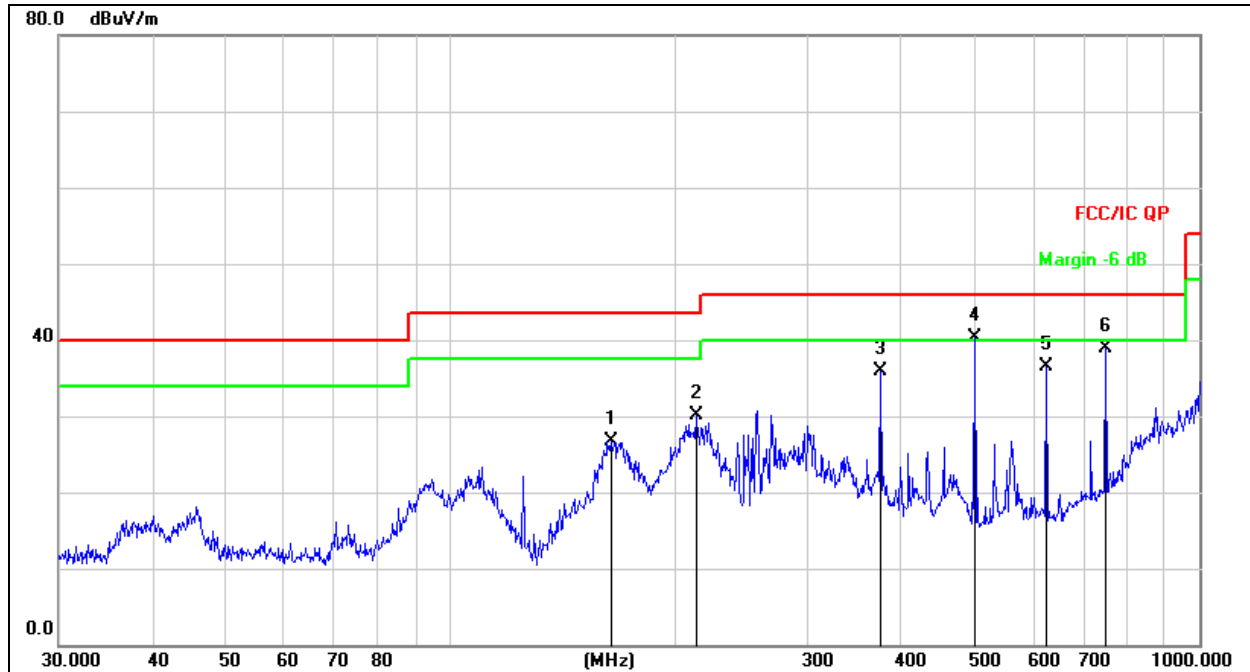


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	163.7550	45.38	-18.62	26.76	43.50	-16.74	QP
2	213.0151	46.14	-16.00	30.14	43.50	-13.36	QP
3	375.9385	47.47	-11.64	35.83	46.00	-10.17	QP
4 *	501.1790	49.21	-8.91	40.30	46.00	-5.70	QP
5	625.0780	43.24	-6.67	36.57	46.00	-9.43	QP
6	750.1083	43.25	-4.34	38.91	46.00	-7.09	QP

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kpa	Test Voltage :	AC120/60Hz
Test Mode :	Mode 4	Polarization :	Vertical

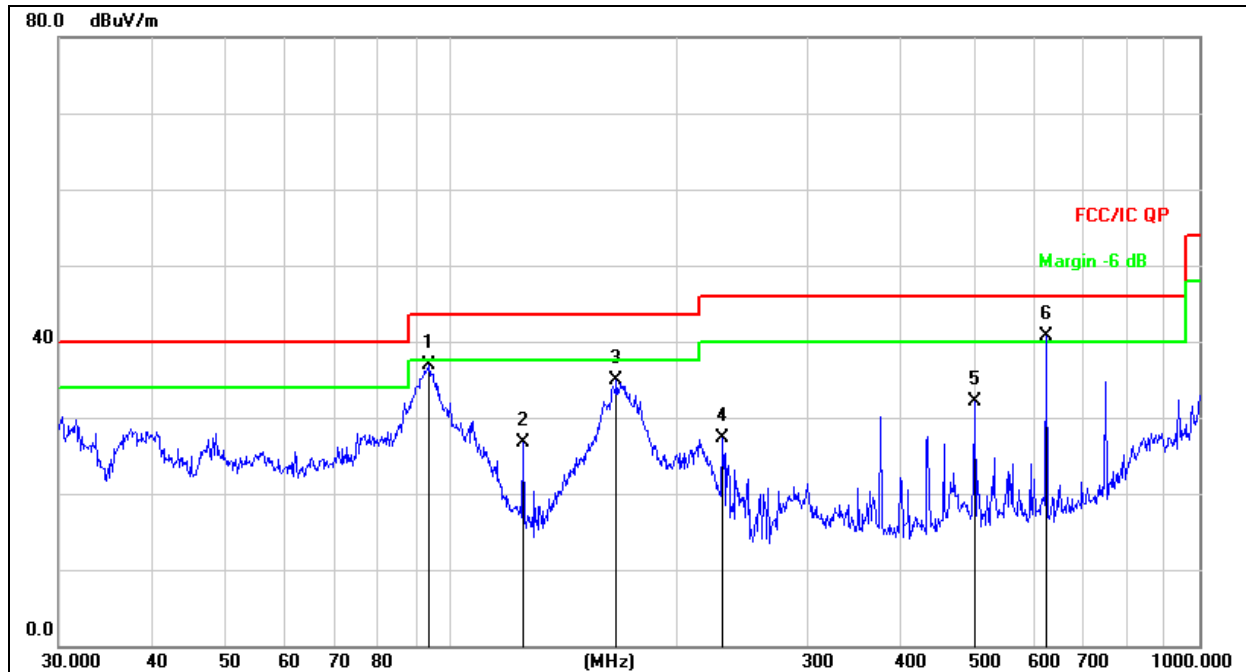

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	93.7685	54.26	-17.41	36.85	43.50	-6.65	QP
2	125.0066	44.50	-17.89	26.61	43.50	-16.89	QP
3	166.6514	53.26	-18.43	34.83	43.50	-8.67	QP
4	230.9068	42.93	-15.59	27.34	46.00	-18.66	QP
5	501.1790	41.09	-8.91	32.18	46.00	-13.82	QP
6 *	625.0780	47.42	-6.67	40.75	46.00	-5.25	QP

Between 1GHz – 40GHz

Test Mode :	TX(5.1G) - 802.11a
-------------	--------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
Low Channel (5180 MHz)-Above 1G									
V	4434.038	64.41	5.94	35.40	44.00	61.75	68.20	-6.45	PK
V	4434.038	43.77	5.94	35.40	44.00	41.11	54.00	-12.89	AV
V	10360.061	60.26	8.46	39.75	44.50	63.97	74.00	-10.03	PK
V	10360.061	43.64	8.46	39.75	44.50	47.35	54.00	-6.65	AV
V	15540.165	63.90	10.12	38.80	44.10	68.72	74.00	-5.28	PK
V	15540.165	43.43	10.12	38.80	42.70	49.65	54.00	-4.35	AV
H	4434.023	62.54	5.94	35.18	44.00	59.66	68.20	-8.54	PK
H	4434.023	43.16	5.94	35.18	44.00	40.28	54.00	-13.72	AV
H	10360.128	54.96	8.46	38.71	44.50	57.63	74.00	-16.37	PK
H	10360.128	44.52	8.46	38.71	44.50	47.19	54.00	-6.81	AV
H	15540.177	51.36	10.12	38.38	44.10	55.76	74.00	-18.24	PK
H	15540.177	42.56	10.12	38.38	44.10	46.96	54.00	-7.04	AV
middle Channel (5200 MHz)-Above 1G									
V	4592.157	60.94	6.48	36.35	44.05	59.72	74.00	-14.28	PK
V	4592.157	43.08	6.48	36.35	44.05	41.86	54.00	-12.14	AV
V	10400.113	63.28	8.47	37.88	44.51	65.12	68.20	-3.08	PK
V	10400.113	43.46	8.47	37.88	44.51	45.30	54.00	-8.70	AV
V	15600.172	60.33	10.12	38.80	44.10	65.15	74.00	-8.85	PK
V	15600.172	43.24	10.12	38.80	42.70	49.46	54.00	-4.54	AV
H	4592.155	61.63	6.48	36.37	44.05	60.43	74.00	-13.57	PK
H	4592.155	43.58	6.48	36.37	44.05	42.38	54.00	-11.62	AV
H	10400.152	54.97	8.47	38.64	44.50	57.58	68.20	-10.62	PK
H	10400.152	40.11	8.47	38.64	44.50	42.72	54.00	-11.28	AV
H	15600.028	50.66	10.12	38.38	44.10	55.06	74.00	-18.94	PK
H	15600.028	44.23	10.12	38.38	44.10	48.63	54.00	-5.37	AV
High Channel (5240 MHz)-Above 1G									
V	4739.108	62.58	7.10	37.24	43.50	63.42	74.00	-10.58	PK
V	4739.108	43.18	7.10	37.24	43.50	44.02	54.00	-9.98	AV
V	10480.005	64.81	8.46	37.68	44.50	66.45	68.20	-1.75	PK
V	10480.005	43.64	8.46	37.68	44.50	45.28	54.00	-8.72	AV
V	15720.075	60.51	10.12	38.80	44.10	65.33	74.00	-8.67	PK
V	15720.075	43.42	10.12	38.80	42.70	49.64	54.00	-4.36	AV
H	4739.047	63.85	7.10	37.24	43.50	64.69	74.00	-9.31	PK
H	4739.047	43.31	7.10	37.24	43.50	44.15	54.00	-9.85	AV
H	10480.033	54.65	8.46	38.57	44.50	57.18	68.20	-11.02	PK
H	10480.033	42.08	8.46	38.57	44.50	44.61	54.00	-9.39	AV
H	15720.019	50.45	10.12	38.38	44.10	54.85	74.00	-19.15	PK
H	15720.019	40.31	10.12	38.38	44.10	44.71	54.00	-9.29	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX(5.1G) - 802.11n-HT20
-------------	-------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
Low Channel (5180 MHz)-Above 1G									
V	4434.137	64.38	5.94	35.40	44.00	61.72	68.20	-6.48	PK
V	4434.137	43.34	5.94	35.40	44.00	40.68	54.00	-13.32	AV
V	10360.179	63.18	8.46	39.75	44.50	66.89	68.20	-1.31	PK
V	10360.179	43.94	8.46	39.75	44.50	47.65	54.00	-6.35	AV
V	15540.089	64.38	10.12	38.80	44.10	69.20	74.00	-4.80	PK
V	15540.089	43.60	10.12	38.80	42.70	49.82	54.00	-4.18	AV
H	4434.192	61.58	5.94	35.18	44.00	58.70	68.20	-9.50	PK
H	4434.192	43.93	5.94	35.18	44.00	41.05	54.00	-12.95	AV
H	10360.034	50.01	8.46	38.71	44.50	52.68	68.20	-15.52	PK
H	10360.034	42.51	8.46	38.71	44.50	45.18	54.00	-8.82	AV
H	15540.155	53.28	10.12	38.38	44.10	57.68	74.00	-16.32	PK
H	15540.155	44.99	10.12	38.38	44.10	49.39	54.00	-4.61	AV
middle Channel (5200 MHz)-Above 1G									
V	4592.131	63.11	6.48	36.35	44.05	61.89	74.00	-12.11	PK
V	4592.131	43.47	6.48	36.35	44.05	42.25	54.00	-11.75	AV
V	10400.143	61.60	8.47	37.88	44.51	63.44	68.20	-4.76	PK
V	10400.143	43.61	8.47	37.88	44.51	45.45	54.00	-8.55	AV
V	15600.195	63.79	10.12	38.80	44.10	68.61	74.00	-5.39	PK
V	15600.195	43.52	10.12	38.80	42.70	49.74	54.00	-4.26	AV
H	4592.125	63.02	6.48	36.37	44.05	61.82	74.00	-12.18	PK
H	4592.125	43.42	6.48	36.37	44.05	42.22	54.00	-11.78	AV
H	10400.005	52.41	8.47	38.64	44.50	55.02	68.20	-13.18	PK
H	10400.005	40.51	8.47	38.64	44.50	43.12	54.00	-10.88	AV
H	15600.194	51.59	10.12	38.38	44.10	55.99	74.00	-18.01	PK
H	15600.194	44.32	10.12	38.38	44.10	48.72	54.00	-5.28	AV
High Channel (5240 MHz)-Above 1G									
V	4739.033	62.31	7.10	37.24	43.50	63.15	74.00	-10.85	PK
V	4739.033	43.94	7.10	37.24	43.50	44.78	54.00	-9.22	AV
V	10480.115	61.49	8.46	37.68	44.50	63.13	68.20	-5.07	PK
V	10480.115	43.35	8.46	37.68	44.50	44.99	54.00	-9.01	AV
V	15720.188	63.64	10.12	38.80	44.10	68.46	74.00	-5.54	PK
V	15720.188	43.43	10.12	38.80	42.70	49.65	54.00	-4.35	AV
H	4739.131	64.28	7.10	37.24	43.50	65.12	74.00	-8.88	PK
H	4739.131	43.71	7.10	37.24	43.50	44.55	54.00	-9.45	AV
H	10480.194	53.73	8.46	38.57	44.50	56.26	68.20	-11.94	PK
H	10480.194	41.09	8.46	38.57	44.50	43.62	54.00	-10.38	AV
H	15720.023	50.20	10.12	38.38	44.10	54.60	74.00	-19.40	PK
H	15720.023	42.03	10.12	38.38	44.10	46.43	54.00	-7.57	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX(5.1G) - 802.11n-HT40
-------------	-------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
Low Channel (5190 MHz)-Above 1G									
V	4434.050	60.02	5.94	35.40	44.00	57.36	74.00	-16.64	PK
V	4434.050	43.04	5.94	35.40	44.00	40.38	54.00	-13.62	AV
V	10380.158	61.50	8.46	39.75	44.50	65.21	68.20	-2.99	PK
V	10380.158	43.34	8.46	39.75	44.50	47.05	54.00	-6.95	AV
V	15570.077	64.58	10.12	38.80	44.10	69.40	74.00	-4.60	PK
V	15570.077	43.32	10.12	38.80	42.70	49.54	54.00	-4.46	AV
H	4434.194	64.10	5.94	35.18	44.00	61.22	74.00	-12.78	PK
H	4434.194	43.41	5.94	35.18	44.00	40.53	54.00	-13.47	AV
H	10380.172	54.05	8.46	38.71	44.50	56.72	68.20	-11.48	PK
H	10380.172	44.95	8.46	38.71	44.50	47.62	54.00	-6.38	AV
H	15570.092	54.47	10.12	38.38	44.10	58.87	74.00	-15.13	PK
H	15570.092	40.90	10.12	38.38	44.10	45.30	54.00	-8.70	AV
middle Channel (5230 MHz)-Above 1G									
V	4739.074	61.74	6.48	36.35	44.05	60.52	74.00	-13.48	PK
V	4739.074	43.12	6.48	36.35	44.05	41.90	54.00	-12.10	AV
V	10460.080	63.58	8.47	37.88	44.51	65.42	68.20	-2.78	PK
V	10460.080	43.75	8.47	37.88	44.51	45.59	54.00	-8.41	AV
V	15690.093	60.48	10.12	38.80	44.10	65.30	74.00	-8.70	PK
V	15690.093	43.43	10.12	38.80	42.70	49.65	54.00	-4.35	AV
H	4739.051	62.82	6.48	36.37	44.05	61.62	74.00	-12.38	PK
H	4739.051	43.22	6.48	36.37	44.05	42.02	54.00	-11.98	AV
H	10460.130	50.47	8.47	38.64	44.50	53.08	68.20	-15.12	PK
H	10460.130	41.23	8.47	38.64	44.50	43.84	54.00	-10.16	AV
H	15690.191	50.61	10.12	38.38	44.10	55.01	74.00	-18.99	PK
H	15690.191	44.36	10.12	38.38	44.10	48.76	54.00	-5.24	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX(5.1G) - 802.11 AC20
-------------	------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
Low Channel (5180 MHz)-Above 1G									
V	4434.162	62.10	5.94	35.40	44.00	59.44	68.20	-8.76	PK
V	4434.162	43.63	5.94	35.40	44.00	40.97	54.00	-13.03	AV
V	10360.129	63.20	8.46	39.75	44.50	66.91	74.00	-7.09	PK
V	10360.129	43.02	8.46	39.75	44.50	46.73	54.00	-7.27	AV
V	15540.042	60.94	10.12	38.80	44.10	65.76	74.00	-8.24	PK
V	15540.042	43.38	10.12	38.80	42.70	49.60	54.00	-4.40	AV
H	4434.003	60.91	5.94	35.18	44.00	58.03	68.20	-10.17	PK
H	4434.003	43.28	5.94	35.18	44.00	40.40	54.00	-13.60	AV
H	10360.049	51.85	8.46	38.71	44.50	54.52	74.00	-19.48	PK
H	10360.049	40.23	8.46	38.71	44.50	42.90	54.00	-11.10	AV
H	15540.170	51.02	10.12	38.38	44.10	55.42	74.00	-18.58	PK
H	15540.170	43.61	10.12	38.38	44.10	48.01	54.00	-5.99	AV
middle Channel (5200 MHz)-Above 1G									
V	4592.080	61.76	6.48	36.35	44.05	60.54	74.00	-13.46	PK
V	4592.080	43.01	6.48	36.35	44.05	41.79	54.00	-12.21	AV
V	10400.051	63.51	8.47	37.88	44.51	65.35	68.20	-2.85	PK
V	10400.051	43.48	8.47	37.88	44.51	45.32	54.00	-8.68	AV
V	15600.005	60.08	10.12	38.80	44.10	64.90	74.00	-9.10	PK
V	15600.005	43.07	10.12	38.80	42.70	49.29	54.00	-4.71	AV
H	4592.050	64.71	6.48	36.37	44.05	63.51	74.00	-10.49	PK
H	4592.050	43.18	6.48	36.37	44.05	41.98	54.00	-12.02	AV
H	10400.019	54.84	8.47	38.64	44.50	57.45	68.20	-10.75	PK
H	10400.019	42.47	8.47	38.64	44.50	45.08	54.00	-8.92	AV
H	15600.078	52.70	10.12	38.38	44.10	57.10	74.00	-16.90	PK
H	15600.078	42.50	10.12	38.38	44.10	46.90	54.00	-7.10	AV
High Channel (5240 MHz)-Above 1G									
V	4739.117	61.92	7.10	37.24	43.50	62.76	74.00	-11.24	PK
V	4739.117	43.02	7.10	37.24	43.50	43.86	54.00	-10.14	AV
V	10480.053	64.40	8.46	37.68	44.50	66.04	68.20	-2.16	PK
V	10480.053	43.25	8.46	37.68	44.50	44.89	54.00	-9.11	AV
V	15720.181	63.61	10.12	38.80	44.10	68.43	74.00	-5.57	PK
V	15720.181	43.39	10.12	38.80	42.70	49.61	54.00	-4.39	AV
H	4739.045	61.03	7.10	37.24	43.50	61.87	74.00	-12.13	PK
H	4739.045	43.85	7.10	37.24	43.50	44.69	54.00	-9.31	AV
H	10480.137	52.25	8.46	38.57	44.50	54.78	68.20	-13.42	PK
H	10480.137	41.72	8.46	38.57	44.50	44.25	54.00	-9.75	AV
H	15720.079	51.08	10.12	38.38	44.10	55.48	74.00	-18.52	PK
H	15720.079	42.47	10.12	38.38	44.10	46.87	54.00	-7.13	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX(5.1G) - 802.11 AC40
-------------	------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
Low Channel (5190 MHz)-Above 1G									
V	4434.057	62.52	5.94	35.40	44.00	59.86	74.00	-14.14	PK
V	4434.057	43.18	5.94	35.40	44.00	40.52	54.00	-13.48	AV
V	10380.016	63.11	8.46	39.75	44.50	66.82	68.20	-1.38	PK
V	10380.016	43.50	8.46	39.75	44.50	47.21	54.00	-6.79	AV
V	15570.027	63.42	10.12	38.80	44.10	68.24	74.00	-5.76	PK
V	15570.027	43.99	10.12	38.80	42.70	50.21	54.00	-3.79	AV
H	4434.123	63.83	5.94	35.18	44.00	60.95	74.00	-13.05	PK
H	4434.123	43.30	5.94	35.18	44.00	40.42	54.00	-13.58	AV
H	10380.146	50.12	8.46	38.71	44.50	52.79	68.20	-15.41	PK
H	10380.146	40.62	8.46	38.71	44.50	43.29	54.00	-10.71	AV
H	15570.056	51.86	10.12	38.38	44.10	56.26	74.00	-17.74	PK
H	15570.056	44.85	10.12	38.38	44.10	49.25	54.00	-4.75	AV
middle Channel (5230 MHz)-Above 1G									
V	4739.036	64.50	6.48	36.35	44.05	63.28	74.00	-10.72	PK
V	4739.036	43.43	6.48	36.35	44.05	42.21	54.00	-11.79	AV
V	10460.031	62.65	8.47	37.88	44.51	64.49	68.20	-3.71	PK
V	10460.031	43.82	8.47	37.88	44.51	45.66	54.00	-8.34	AV
V	15690.069	64.20	10.12	38.80	44.10	69.02	74.00	-4.98	PK
V	15690.069	43.80	10.12	38.80	42.70	50.02	54.00	-3.98	AV
H	4739.040	63.99	6.48	36.37	44.05	62.79	74.00	-11.21	PK
H	4739.040	43.38	6.48	36.37	44.05	42.18	54.00	-11.82	AV
H	10460.013	53.64	8.47	38.64	44.50	56.25	68.20	-11.95	PK
H	10460.013	40.78	8.47	38.64	44.50	43.39	54.00	-10.61	AV
H	15690.065	50.92	10.12	38.38	44.10	55.32	74.00	-18.68	PK
H	15690.065	43.14	10.12	38.38	44.10	47.54	54.00	-6.46	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode :	TX(5.1G) - 802.11 AC80
-------------	------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
(5210 MHz)-Above 1G									
V	4434.020	64.81	5.94	35.40	44.00	62.15	74.00	-11.85	PK
V	4434.020	43.07	5.94	35.40	44.00	40.41	54.00	-13.59	AV
V	10420.021	63.88	8.46	39.75	44.50	67.59	68.20	-0.61	PK
V	10420.021	43.22	8.46	39.75	44.50	46.93	54.00	-7.07	AV
V	15630.115	63.29	10.12	38.80	44.10	68.11	74.00	-5.89	PK
V	15630.115	43.47	10.12	38.80	42.70	49.69	54.00	-4.31	AV
H	4434.056	62.75	5.94	35.18	44.00	59.87	74.00	-14.13	PK
H	4434.056	43.62	5.94	35.18	44.00	40.74	54.00	-13.26	AV
H	10420.114	50.62	8.46	38.71	44.50	53.29	68.20	-14.91	PK
H	10420.114	43.04	8.46	38.71	44.50	45.71	54.00	-8.29	AV
H	15630.194	51.54	10.12	38.38	44.10	55.94	74.00	-18.06	PK
H	15630.194	40.45	10.12	38.38	44.10	44.85	54.00	-9.15	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

8. Power Spectral Density Test

8.1 Block Diagram Of Test Setup



8.2 Limit

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.3 Test Procedure


For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHz is available on nearly all spectrum analyzers.

8.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

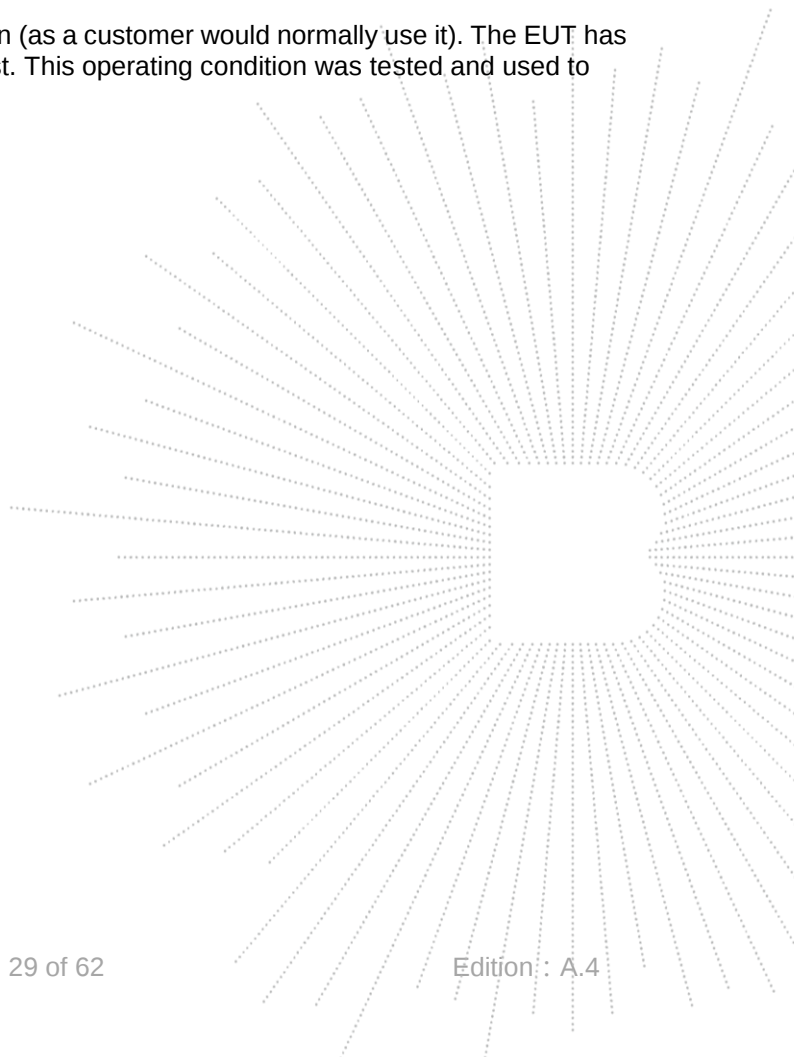


8.5 Test Result


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX Frequency U-NII-1 (5180-5240MHz)		

Test Mode	Frequency	Measured Power Density (dBm/MHz)	Limit (dBm/MHz)	Result
802.11 a	5180 MHz	-0.390	11	PASS
	5200 MHz	-0.420	11	PASS
	5240 MHz	0.590	11	PASS
802.11 n20	5180 MHz	0.627	11	PASS
	5200 MHz	-0.265	11	PASS
	5240 MHz	0.468	11	PASS
802.11 n40	5190 MHz	-0.945	11	PASS
	5230 MHz	-1.684	11	PASS
802.11 AC20	5180 MHz	0.777	11	PASS
	5200 MHz	-0.067	11	PASS
	5240 MHz	0.083	11	PASS
802.11 AC40	5190 MHz	-1.449	11	PASS
	5230 MHz	-1.344	11	PASS
802.11 AC80	5210 MHz	-1.575	11	PASS


(802.11a) PSD plot on channel 36

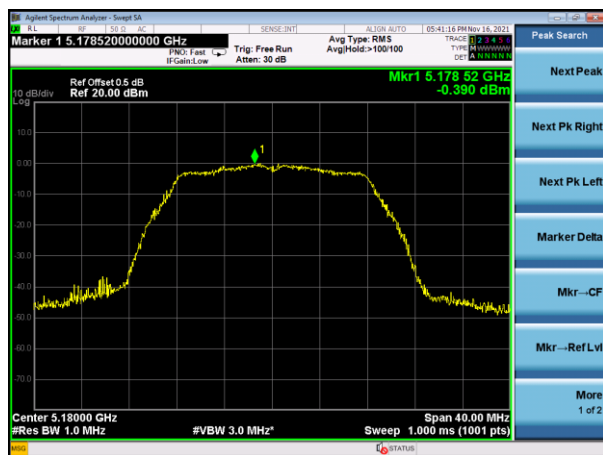


(802.11n20) PSD plot on channel 36

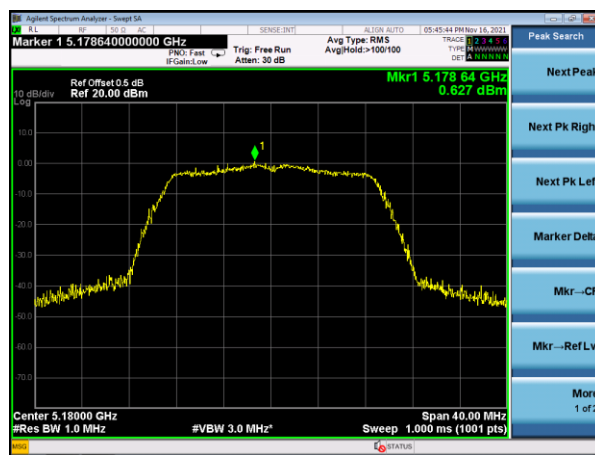


(802.11a) PSD plot on channel 40

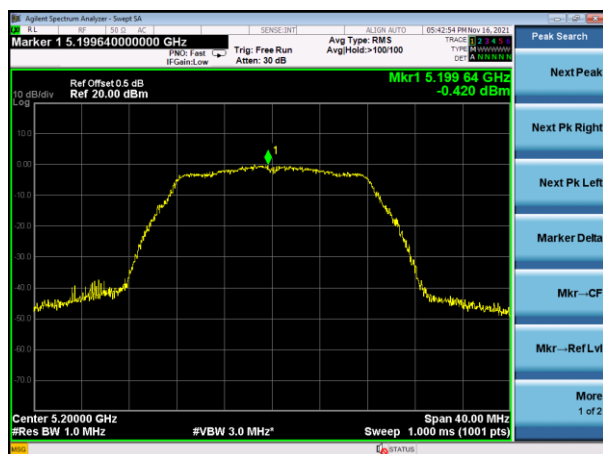


(802.11n20) PSD plot on channel 40

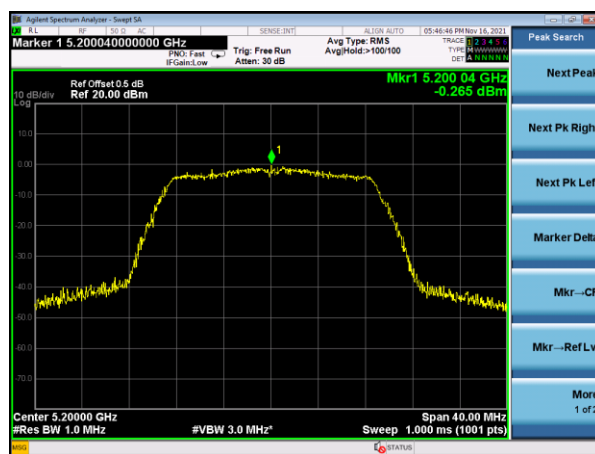


(802.11a) PSD plot on channel 48

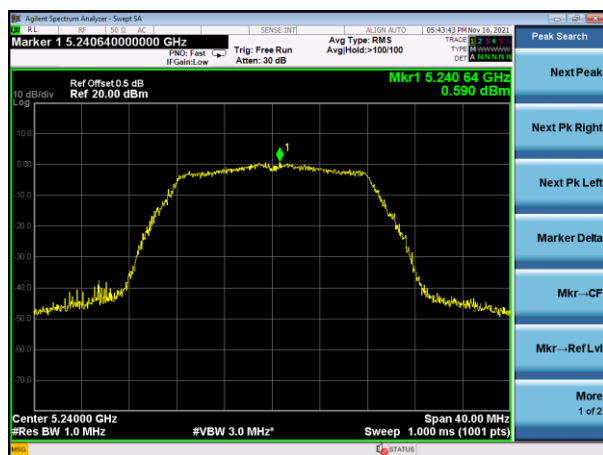


(802.11n20) PSD plot on channel 48

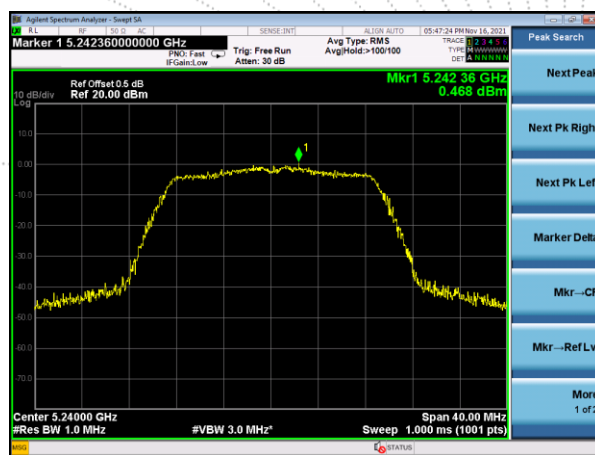


(802.11n40) PSD plot on channel 38

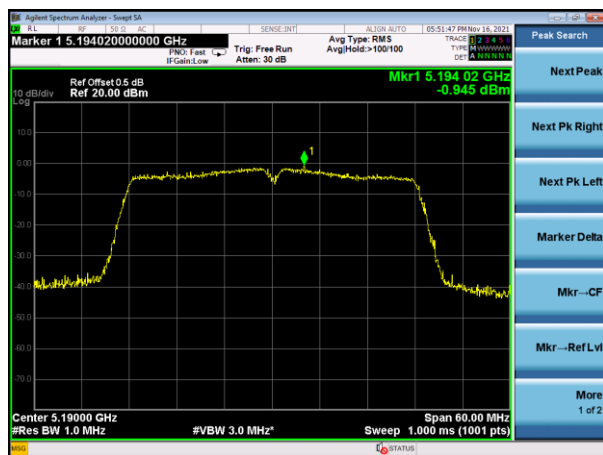

(802.11ac20) PSD plot on channel 36

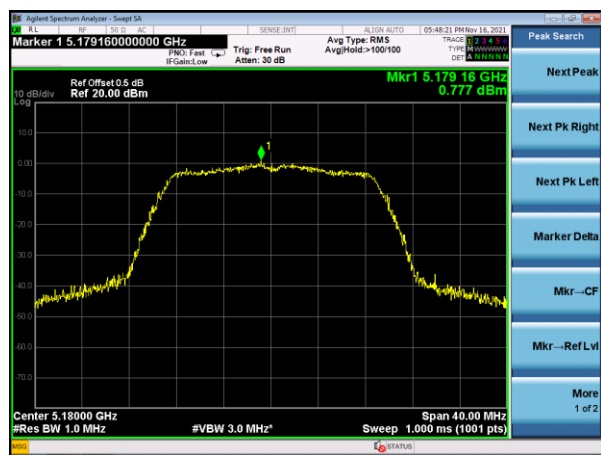


(802.11n40) PSD plot on channel 46

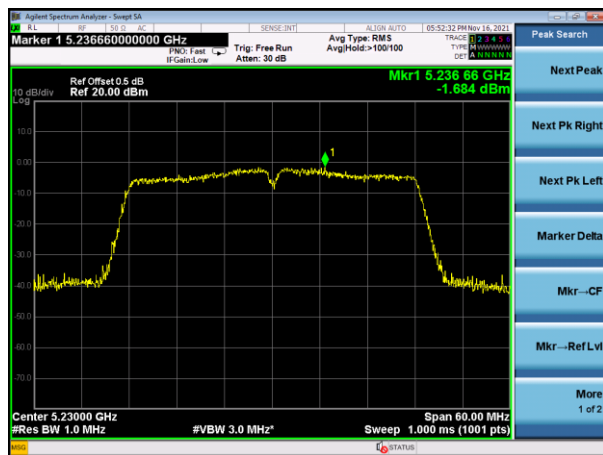


(802.11ac20) PSD plot on channel 40




(802.11ac20) PSD plot on channel 48

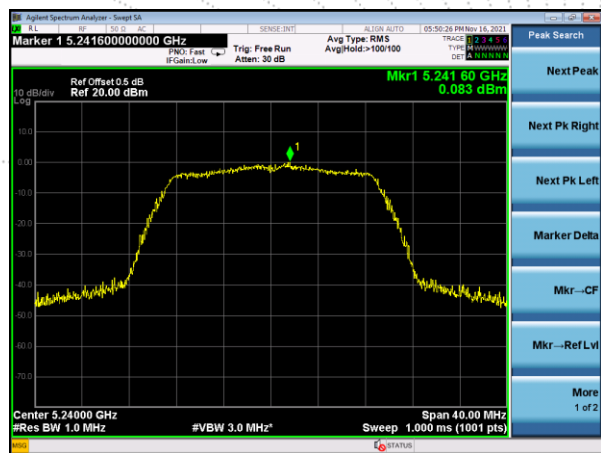



(802.11ac40) PSD plot on channel 38

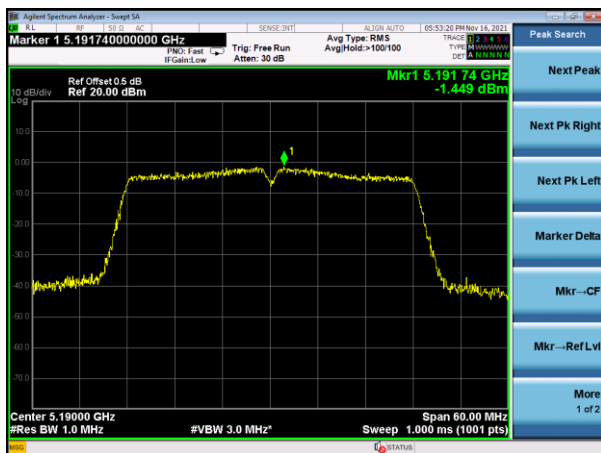

(802.11ac80) PSD plot on channel 42

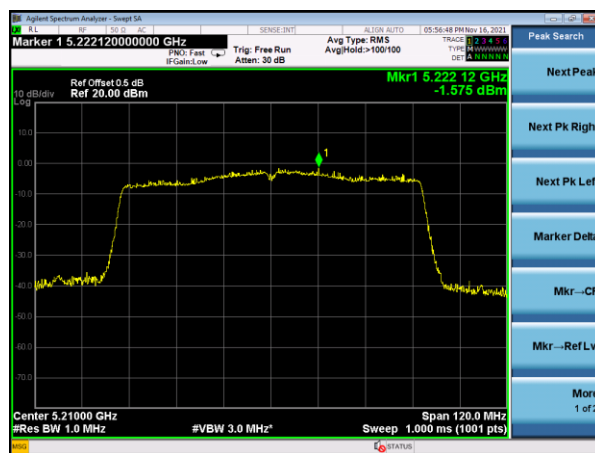


(802.11ac40) PSD plot on channel 46

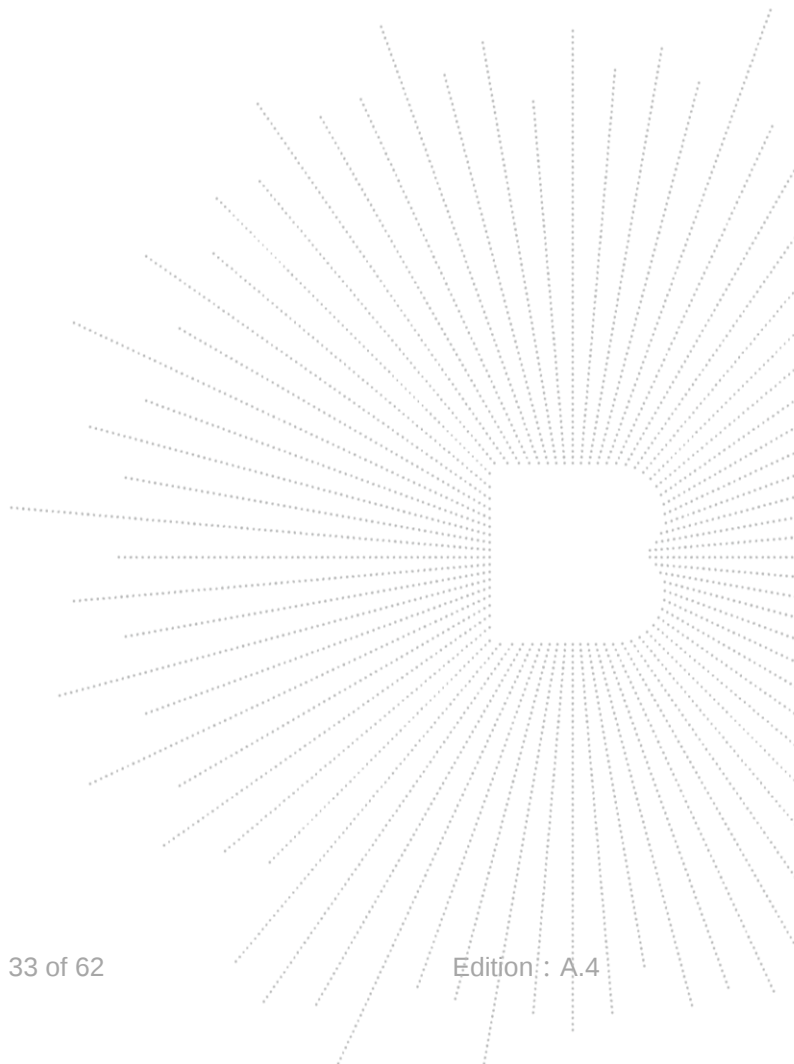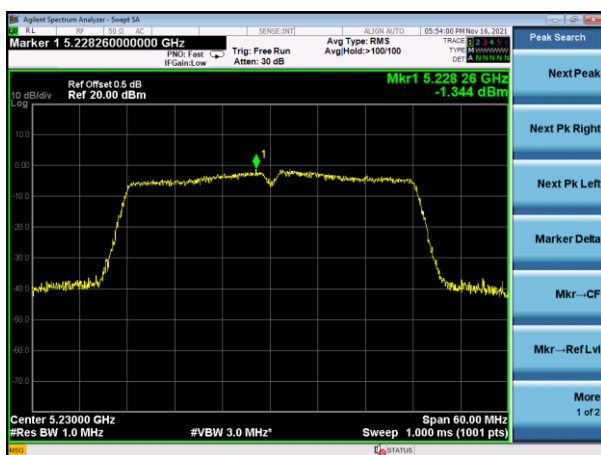

9. 26dB & 99% Emission Bandwidth

9.1 Block Diagram Of Test Setup

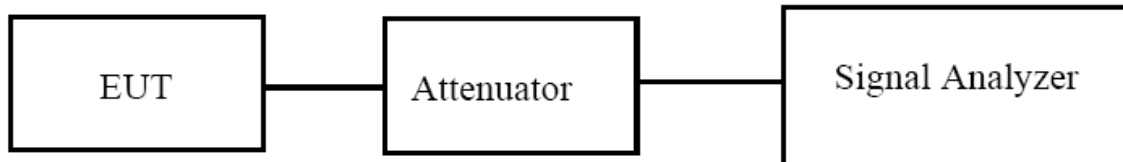

9.2 Limit

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

9.3 Test Procedure

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

- 1. Set center frequency to the nominal EUT channel center frequency.
- 2. Set span = 1.5 times to 5.0 times the OBW.
- 3. Set RBW = 1 % to 5 % of the OBW
- 4. Set VBW $\geq 3 \cdot$ RBW
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- 6. Use the 99 % power bandwidth function of the instrument (if available).
- 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

9.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


9.5 Test Result

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 5V
Test Mode :	TX Frequency U-NII-1 (5180-5240MHz)		


Mode	Channel	Frequency (MHz)	99% bandwidth(MHz)	26dB bandwidth(MHz)	Result
802.11a	CH36	5180	16.82	21.21	Pass
	CH40	5200	16.76	21.30	Pass
	CH48	5240	16.73	20.99	Pass
802.11 n20	CH36	5180	17.84	21.33	Pass
	CH40	5200	17.83	21.05	Pass
	CH48	5240	17.87	21.29	Pass
802.11 n40	CH 38	5190	36.41	40.26	Pass
	CH 46	5230	36.47	40.47	Pass
802.11 AC20	CH36	5180	17.91	21.47	Pass
	CH40	5200	17.85	21.53	Pass
	CH48	5240	17.87	21.32	Pass
802.11 AC40	CH 38	5190	36.35	40.41	Pass
	CH 46	5230	36.44	40.26	Pass
802.11 AC80	CH 42	5210	75.63	80.88	Pass

Test plot


(802.11a) 26dB&99%Bandwidth plot on channel 36

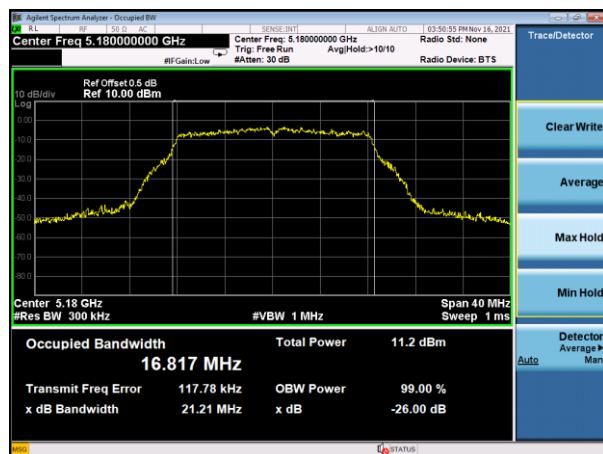


(802.11 n20) 26dB&99%Bandwidth plot on channel 36

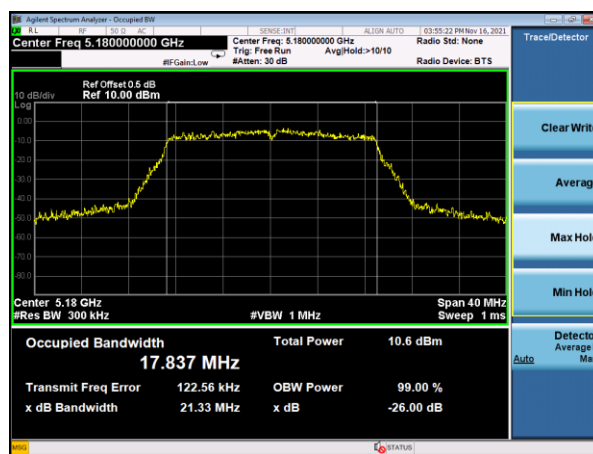


(802.11a) 26dB&99%Bandwidth plot on channel 40

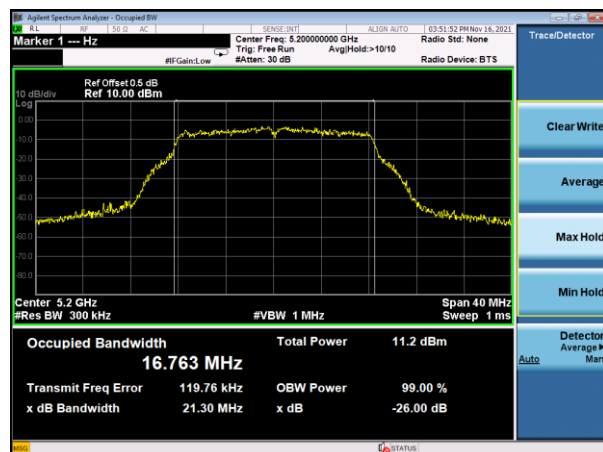


(802.11 n20) 26dB&99%Bandwidth plot on channel 40

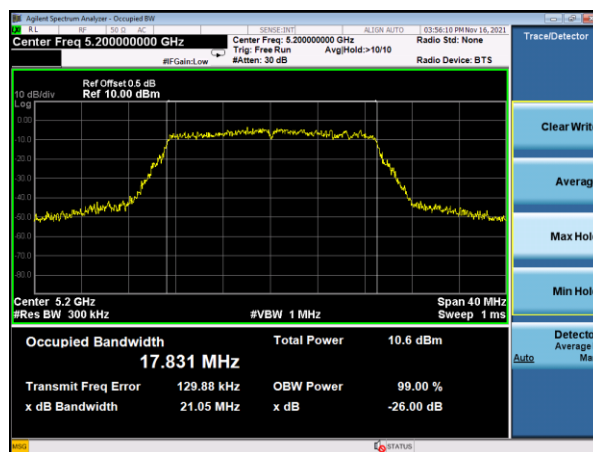

(802.11a) 26dB&99%Bandwidth plot on channel 48

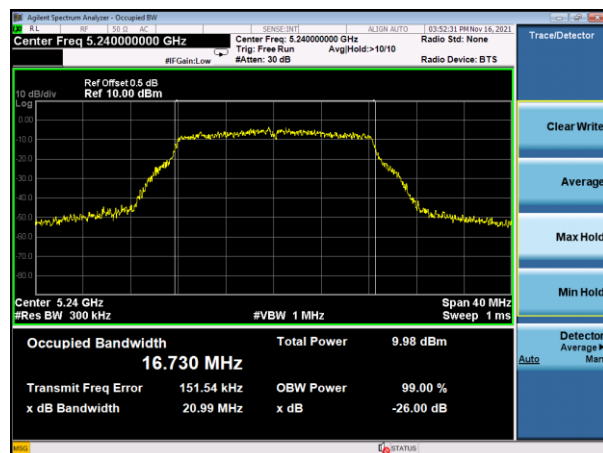


(802.11 n20) 26dB&99%Bandwidth plot on channel 48

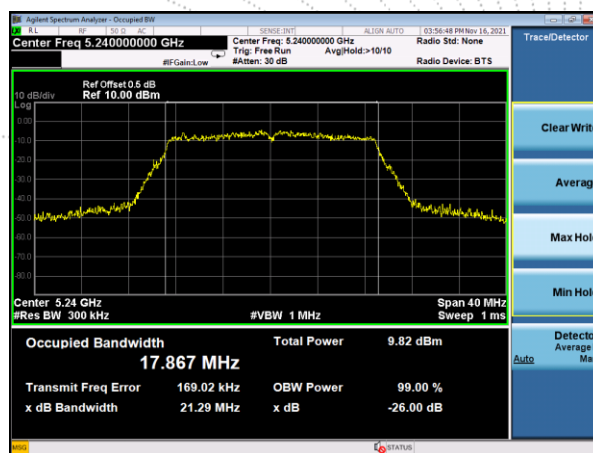


Test plot


(802.11 n40) 26dB&99%Bandwidth plot on channel 38

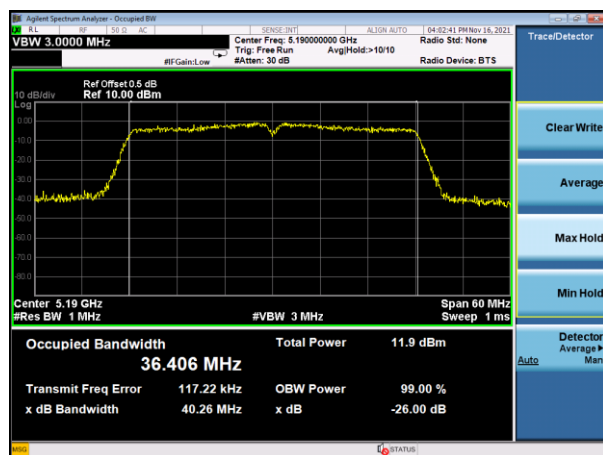


(802.11 AC20) -26dB&99%Bandwidth plot on channel 36

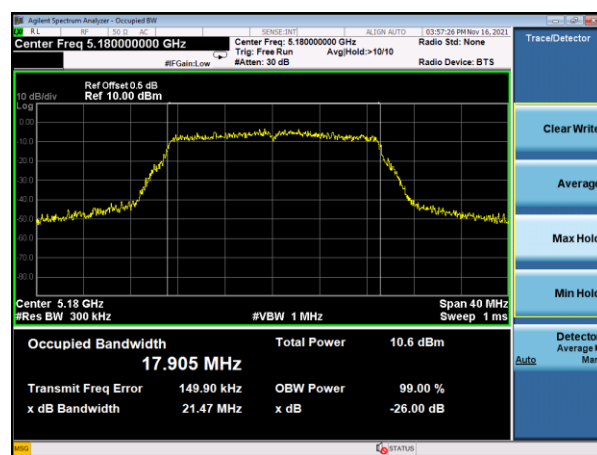


(802.11 n40) 26dB&99%Bandwidth plot on channel 46

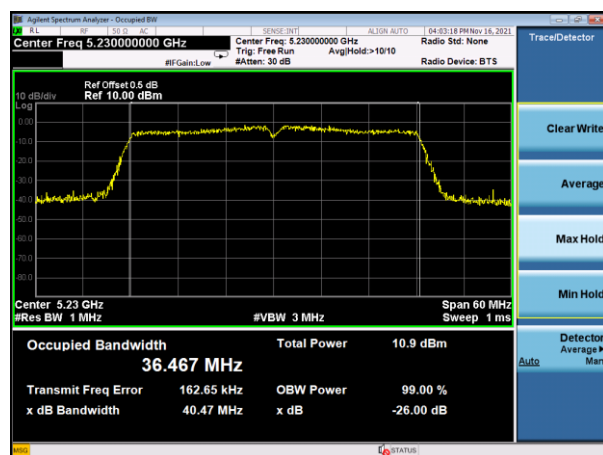

(802.11 AC20) -26dB&99%Bandwidth plot on channel 40

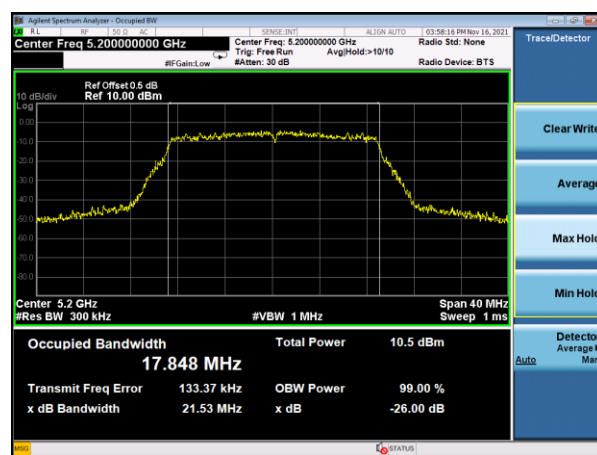


(802.11 AC20) -26dB&99%Bandwidth plot on channel 48

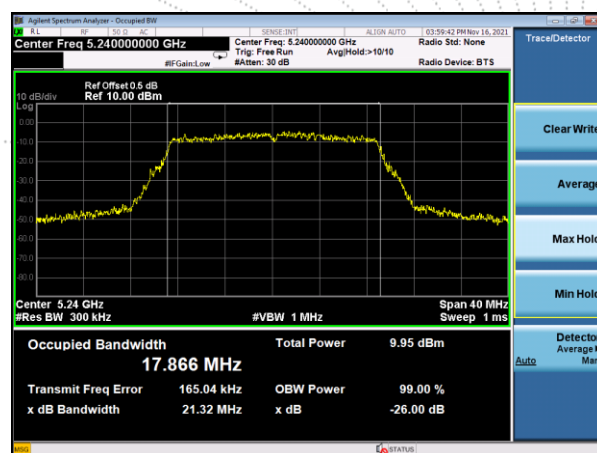


Test plot



(802.11 AC40) -26dB&99%Bandwidth plot on channel 38

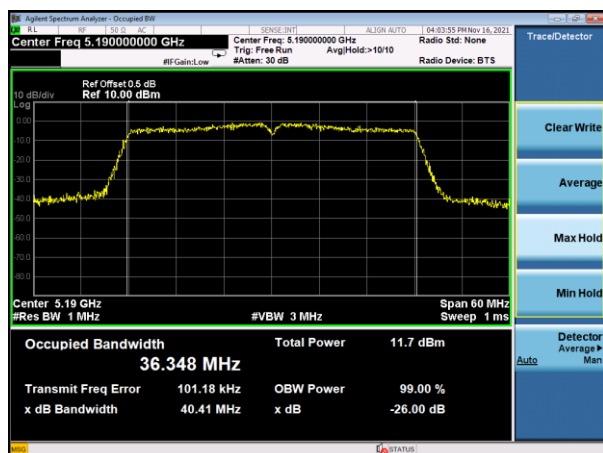

(802.11 AC80) -26dB&99%Bandwidth plot on channel 42

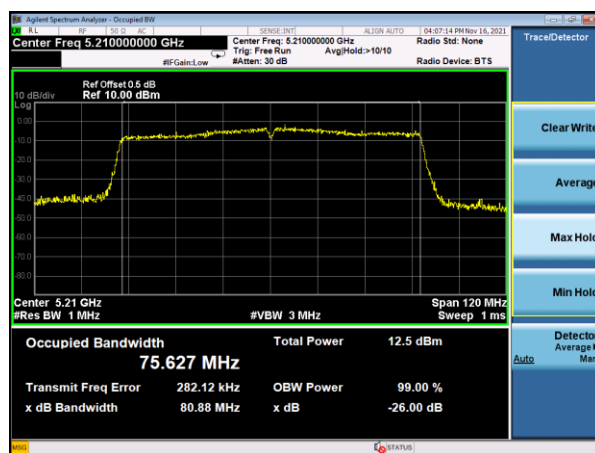

(802.11 AC40) -26dB&99%Bandwidth plot on channel 46

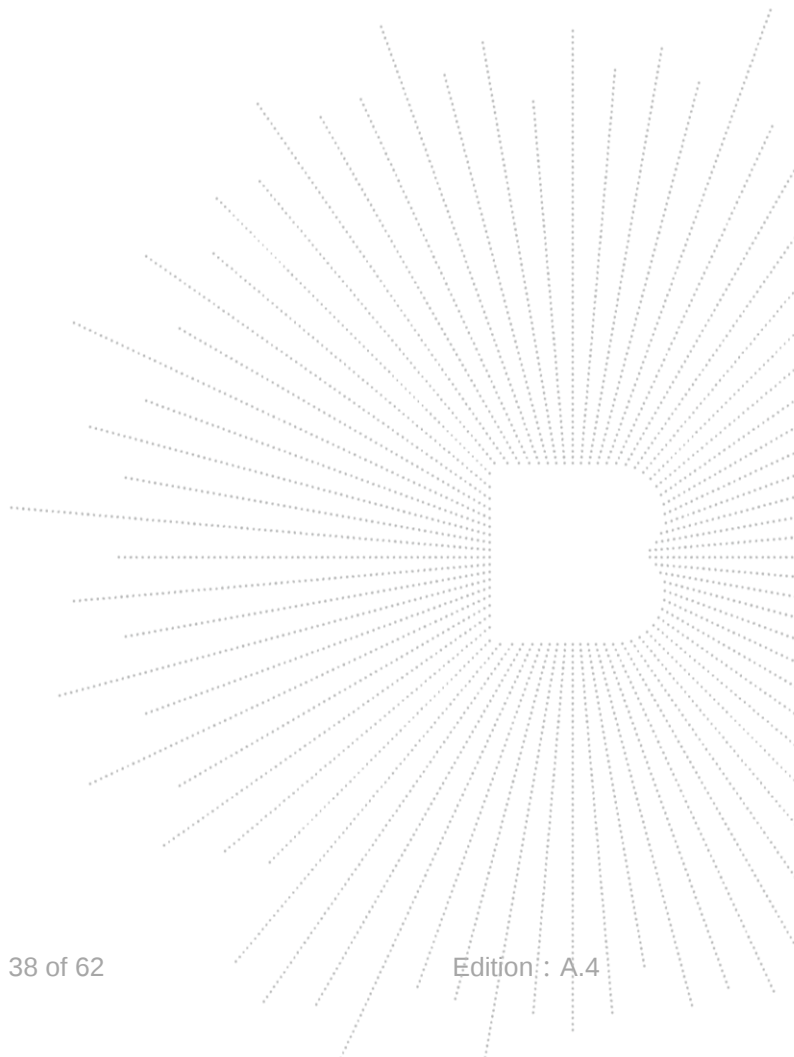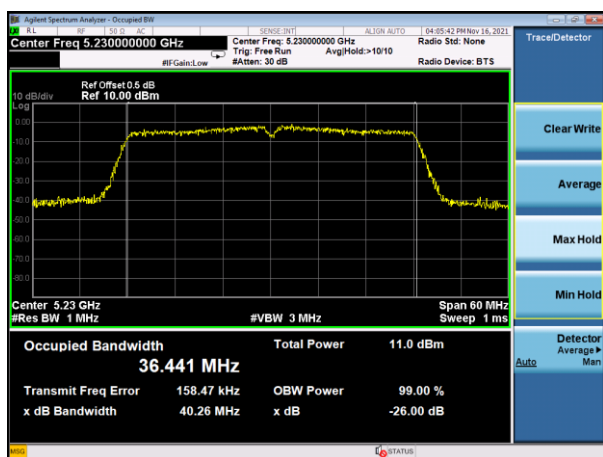

10. Maximum Conducted Output Power

10.1 Block Diagram Of Test Setup



10.2 Limit

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	1W
5725~5850	1W

10.3 Test Procedure

Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered

to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

10.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

