

6.5. 99% Occupied Bandwidth(conducted)

6.5.1 Measurement Limit


Standard	Limit(MHz)
15.407(a)	N/A

6.5.2 Test Procedure

The measurement method is made according to KDB 789033 D

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.5.3 Test Setup

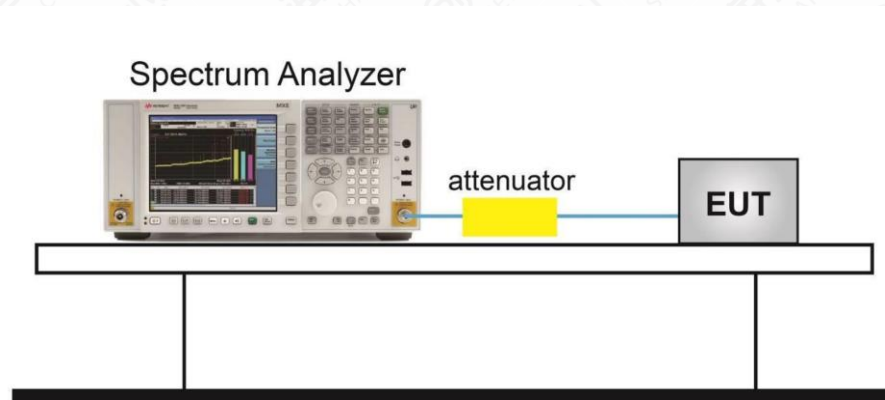


6.5.4 Measurement Results


TestMode	Antenna	Frequency [MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	17.28	5171.3600	5188.6400	---	---
11A	Ant1	5200	17.24	5191.3600	5208.6000	---	---
11A	Ant1	5240	17.28	5231.3200	5248.6000	---	---
11A	Ant1	5260	17.28	5251.3200	5268.6000	---	---
11A	Ant1	5280	17.24	5271.3600	5288.6000	---	---

11A	Ant1	5320	17.2	5311.4000	5328.6000	---	---
11A	Ant1	5500	17.2	5491.4400	5508.6400	---	---
11A	Ant1	5580	17.28	5571.3600	5588.6400	---	---
11A	Ant1	5700	17.24	5691.3600	5708.6000	---	---
11N20SISO	Ant1	5180	18.12	5170.9200	5189.0400	---	---
11N20SISO	Ant1	5200	18.08	5190.9200	5209.0000	---	---
11N20SISO	Ant1	5240	18.04	5230.9600	5249.0000	---	---
11N20SISO	Ant1	5260	18.16	5250.8800	5269.0400	---	---
11N20SISO	Ant1	5280	18.12	5270.9200	5289.0400	---	---
11N20SISO	Ant1	5320	18.08	5310.9600	5329.0400	---	---
11N20SISO	Ant1	5500	18.04	5491.0000	5509.0400	---	---
11N20SISO	Ant1	5580	18.2	5570.9200	5589.1200	---	---
11N20SISO	Ant1	5700	18.16	5690.8800	5709.0400	---	---
11N40SISO	Ant1	5190	36.48	5171.7600	5208.2400	---	---
11N40SISO	Ant1	5230	36.56	5211.6800	5248.2400	---	---
11N40SISO	Ant1	5270	36.48	5251.7600	5288.2400	---	---
11N40SISO	Ant1	5310	36.64	5291.6800	5328.3200	---	---
11N40SISO	Ant1	5510	36.32	5491.8400	5528.1600	---	---
11N40SISO	Ant1	5550	36.56	5531.7600	5568.3200	---	---
11N40SISO	Ant1	5670	36.56	5651.6800	5688.2400	---	---
11AC20SISO	Ant1	5180	18.04	5170.9600	5189.0000	---	---
11AC20SISO	Ant1	5200	18.08	5190.9200	5209.0000	---	---
11AC20SISO	Ant1	5240	18.04	5230.9600	5249.0000	---	---
11AC20SISO	Ant1	5260	18.04	5250.9600	5269.0000	---	---
11AC20SISO	Ant1	5280	18.08	5270.9200	5289.0000	---	---
11AC20SISO	Ant1	5320	18.08	5310.9600	5329.0400	---	---
11AC20SISO	Ant1	5500	18.08	5490.9600	5509.0400	---	---
11AC20SISO	Ant1	5580	18.08	5570.9600	5589.0400	---	---
11AC20SISO	Ant1	5700	18.04	5690.9600	5709.0000	---	---
11AC40SISO	Ant1	5190	36.48	5171.7600	5208.2400	---	---
11AC40SISO	Ant1	5230	36.4	5211.8400	5248.2400	---	---
11AC40SISO	Ant1	5270	36.48	5251.7600	5288.2400	---	---
11AC40SISO	Ant1	5310	36.56	5291.6800	5328.2400	---	---
11AC40SISO	Ant1	5510	36.4	5491.7600	5528.1600	---	---
11AC40SISO	Ant1	5550	36.4	5531.8400	5568.2400	---	---
11AC40SISO	Ant1	5670	36.48	5651.6800	5688.1600	---	---
11AC80SISO	Ant1	5210	75.52	5172.2400	5247.7600	---	---
11AC80SISO	Ant1	5290	75.52	5252.2400	5327.7600	---	---
11AC80SISO	Ant1	5530	75.52	5492.2400	5567.7600	---	---
11AC80SISO	Ant1	5610	75.52	5572.2400	5647.7600	---	---

Test Graphs

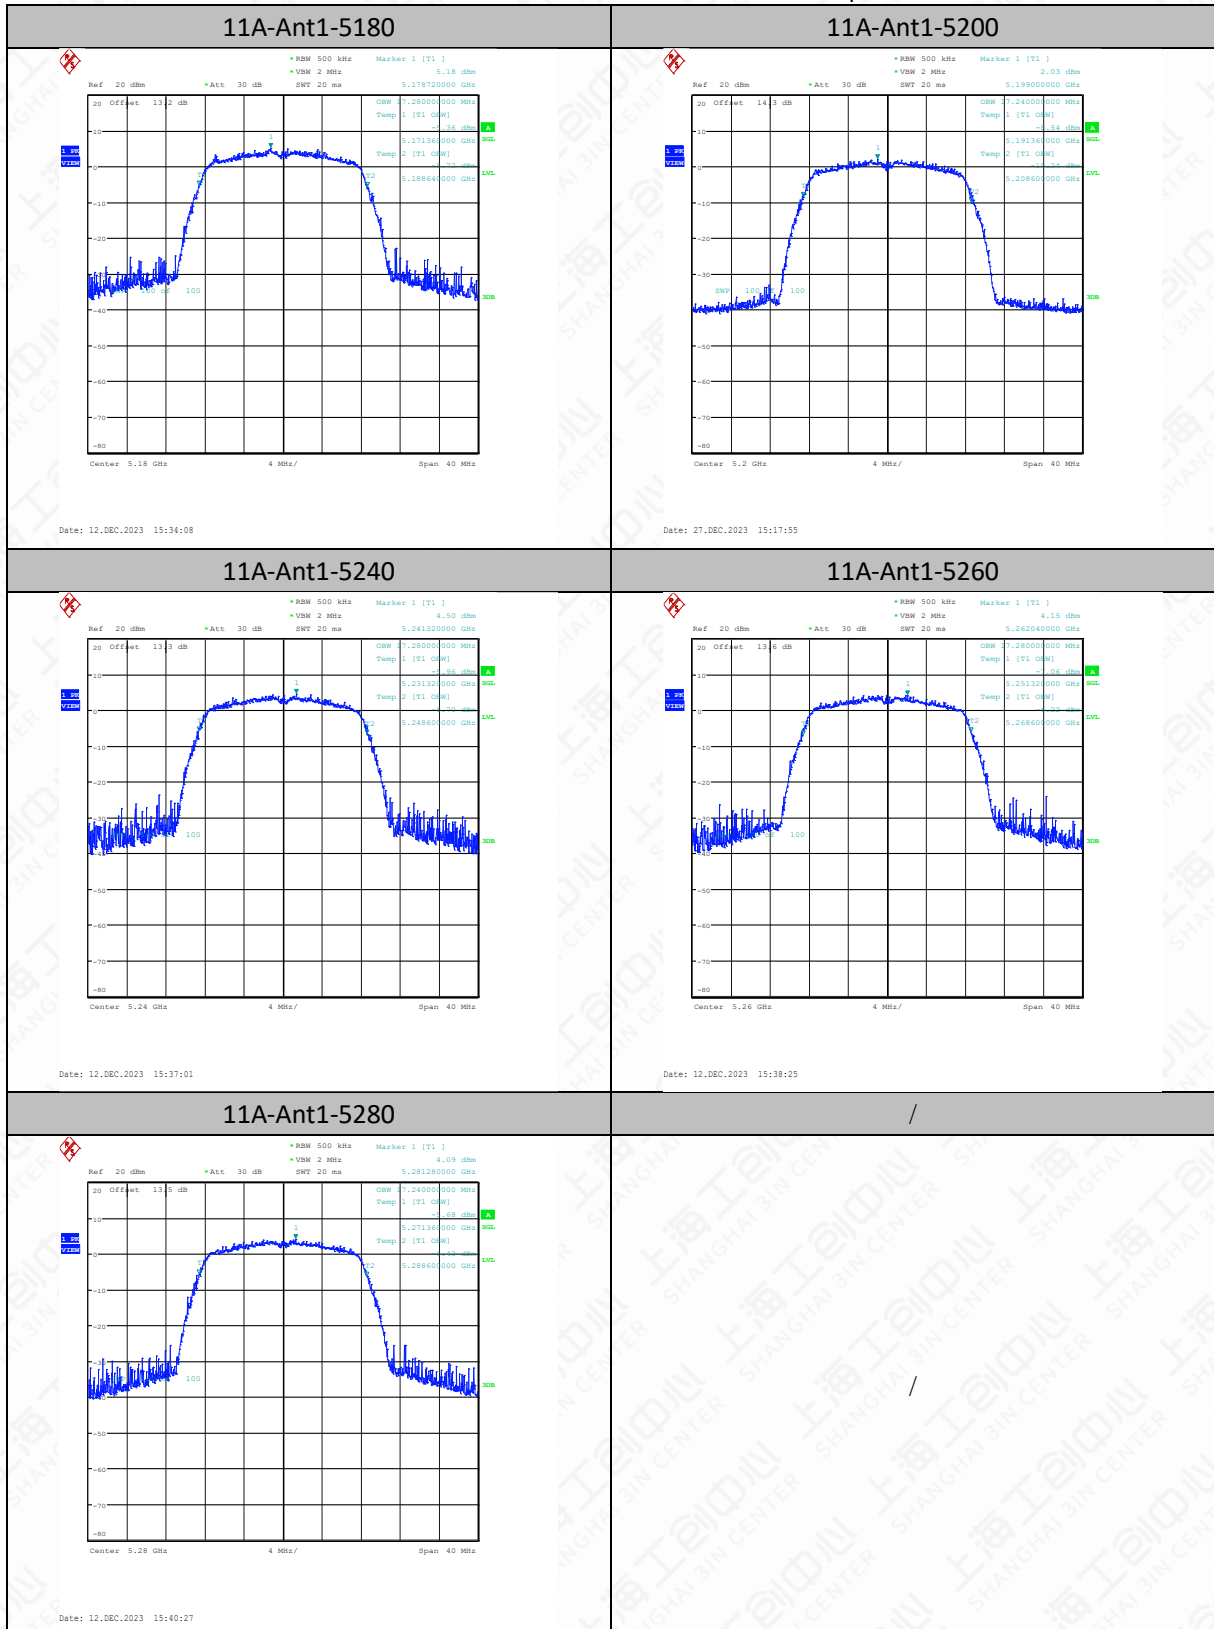


11A-Ant1-5320

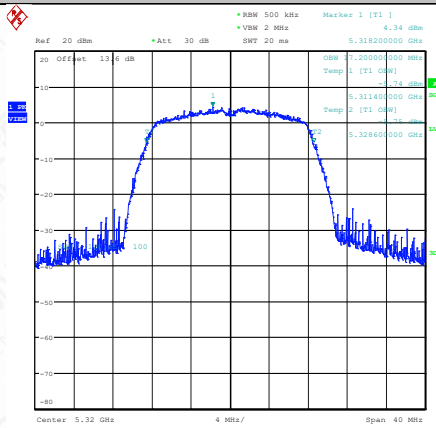


Date: 12,DEC,2023 15:41:59

11A-Ant1-5500

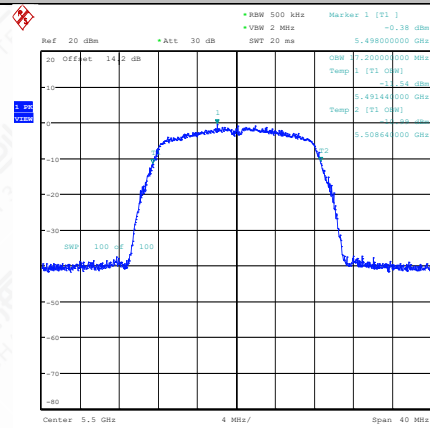


Date: 28,DEC,2023 13:52:02

11A-Ant1-5580

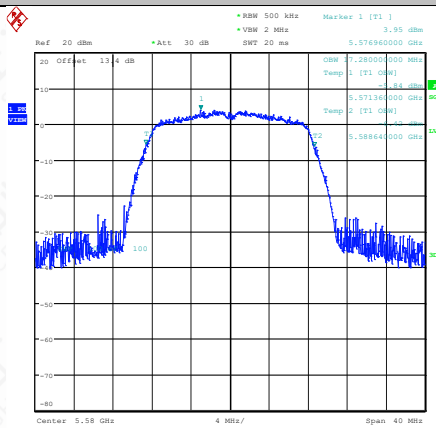


Date: 13,DEC,2023 08:45:00

11A-Ant1-5700

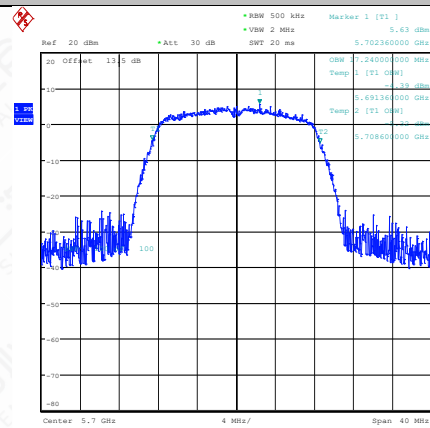


Date: 13,DEC,2023 08:46:39

11N20SISO-Ant1-5180

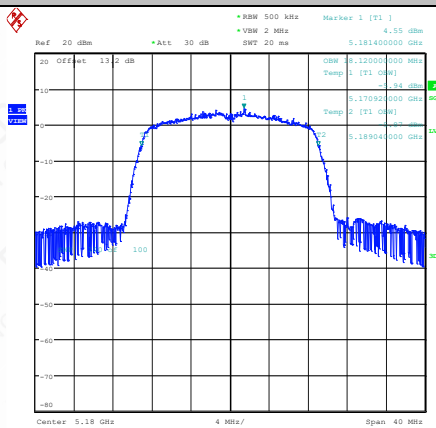



Date: 12,DEC,2023 15:43:38


11N20SISO-Ant1-5200

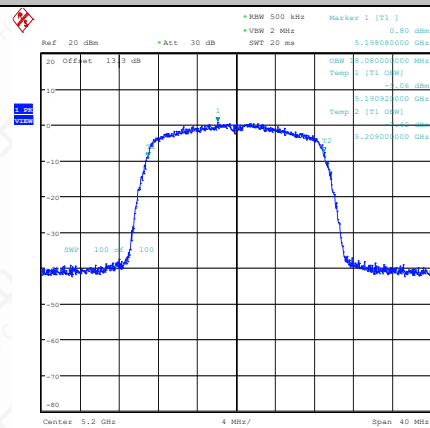


Date: 12,DEC,2023 16:31:33

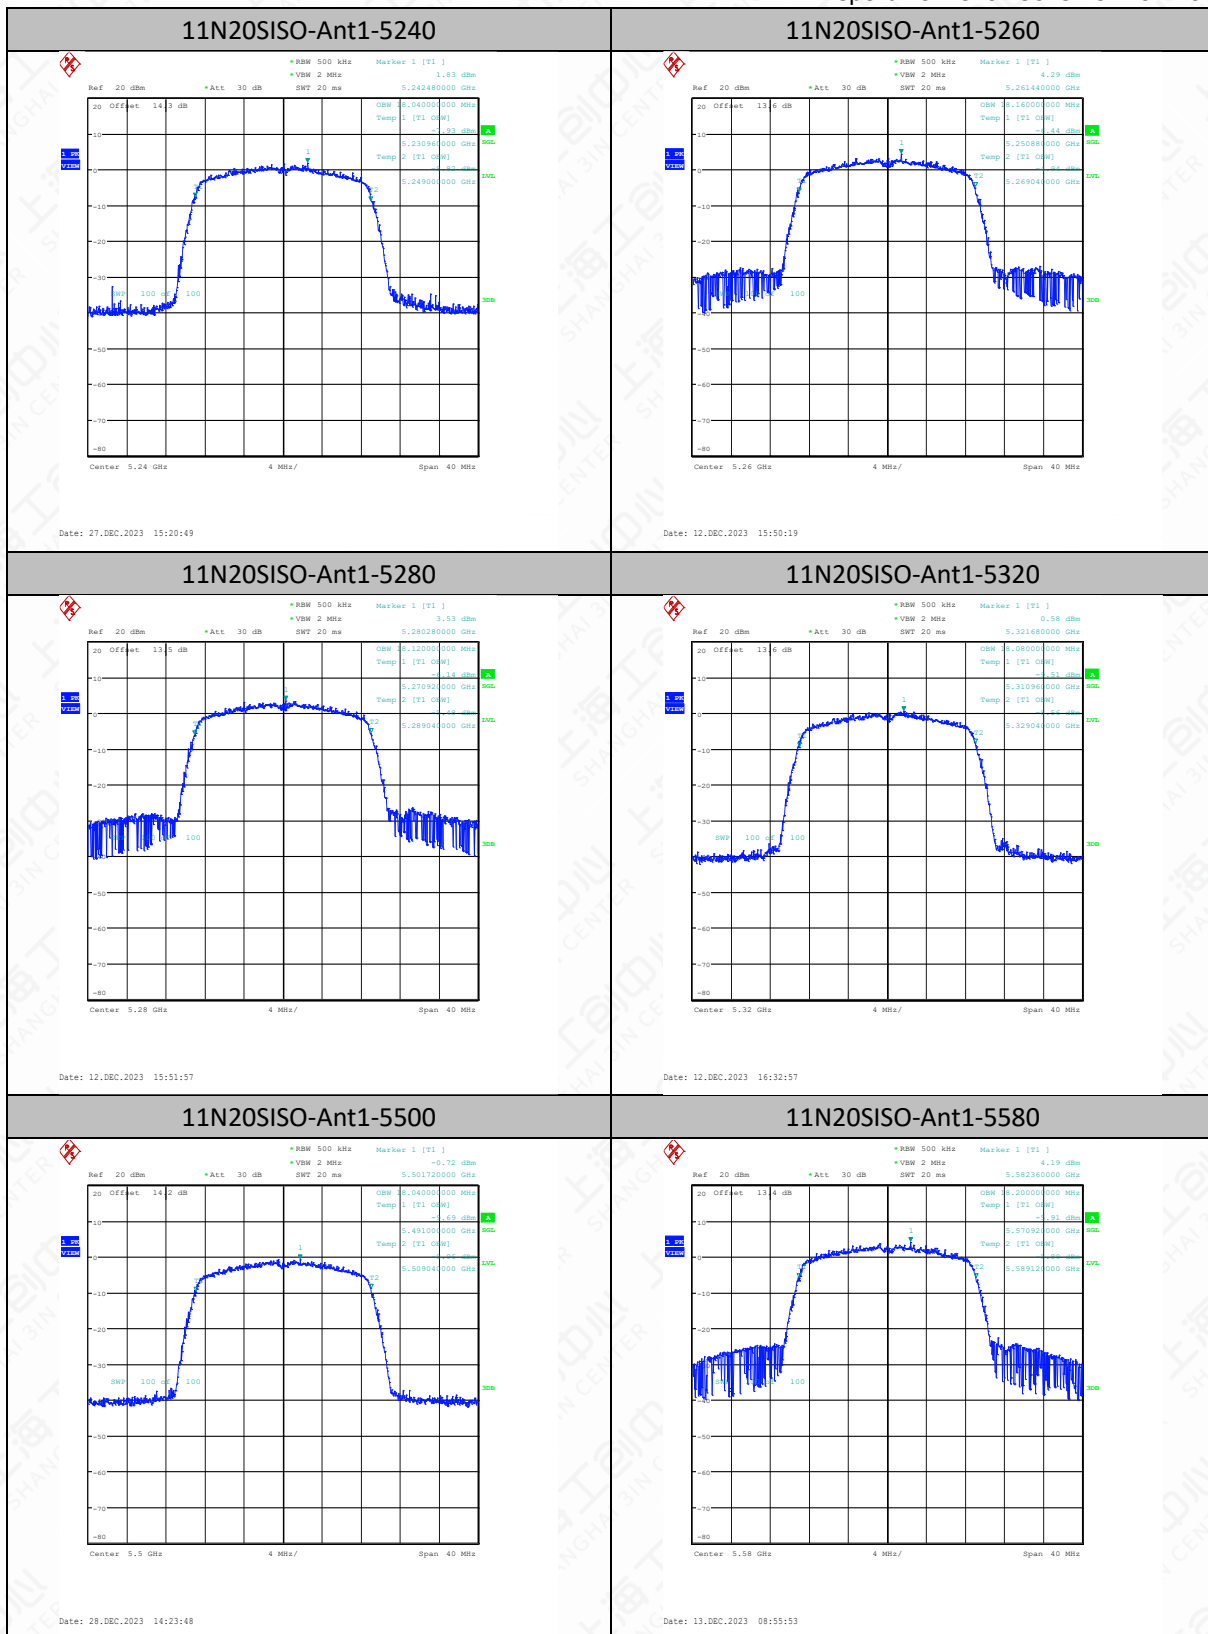

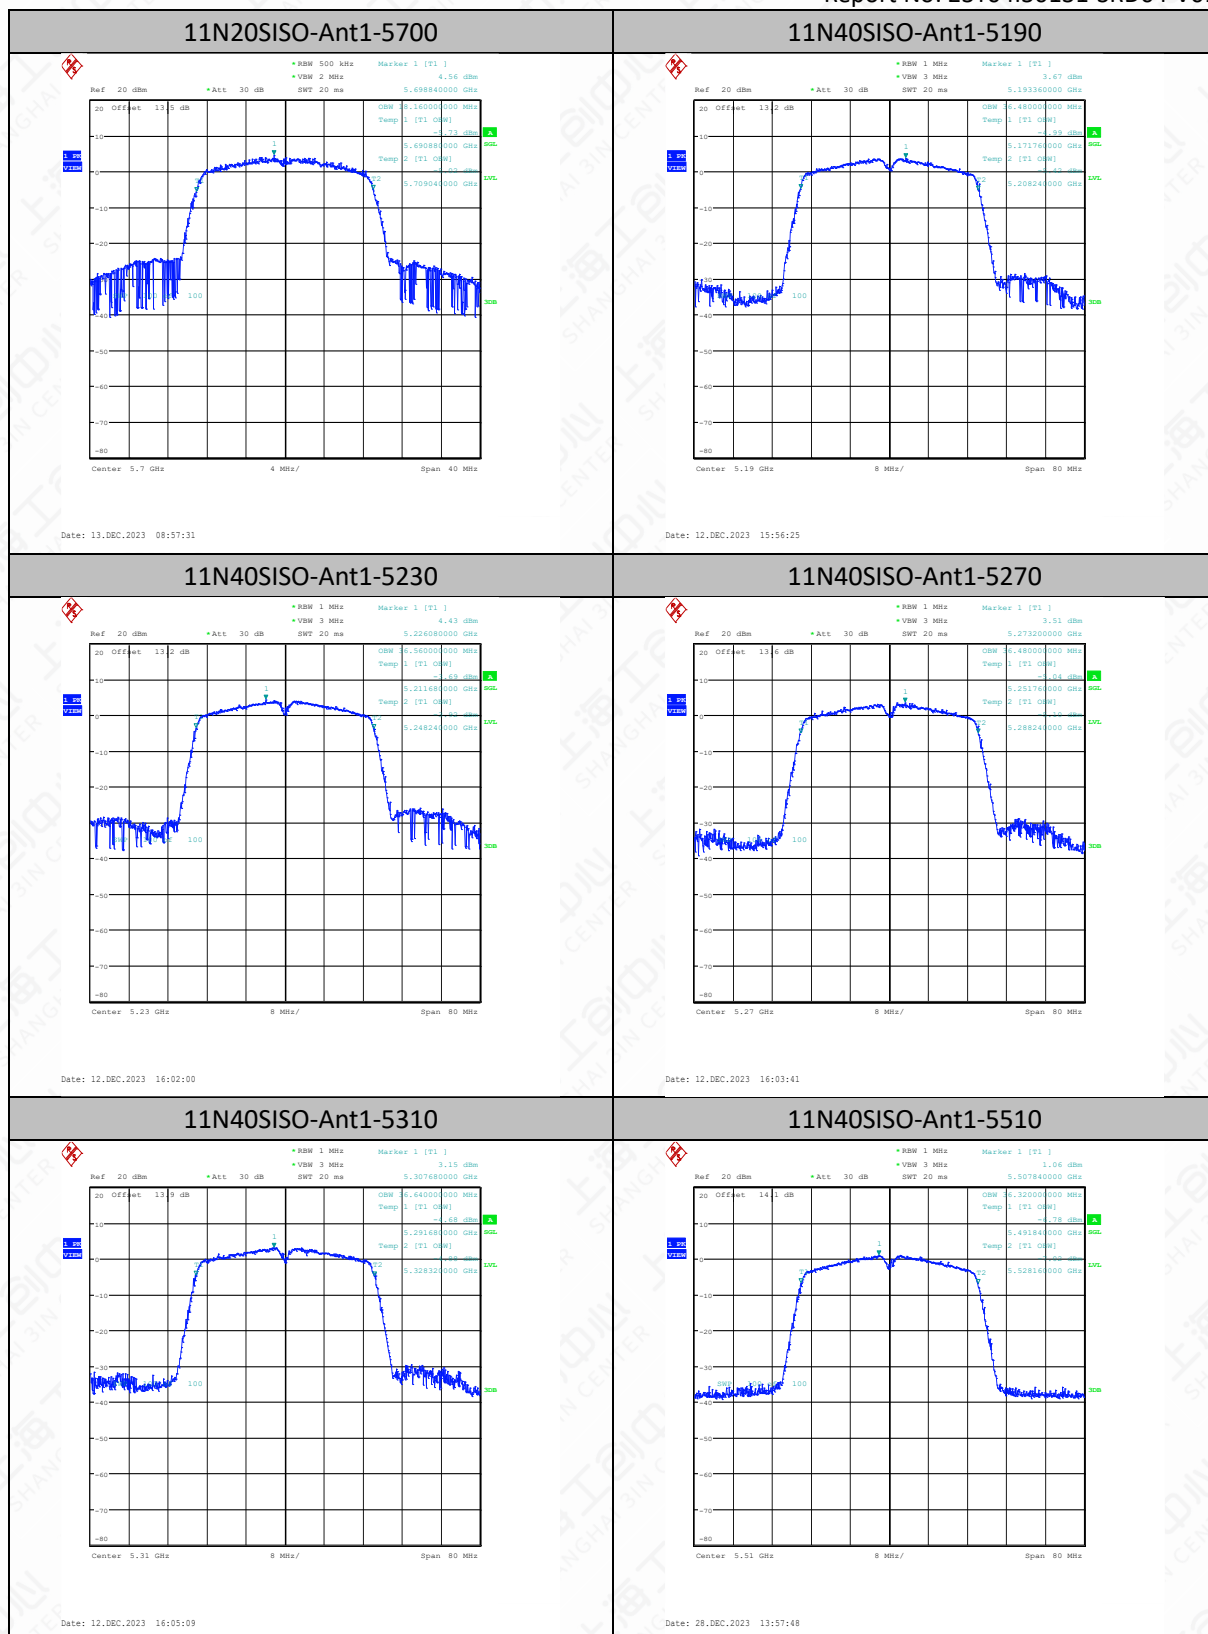

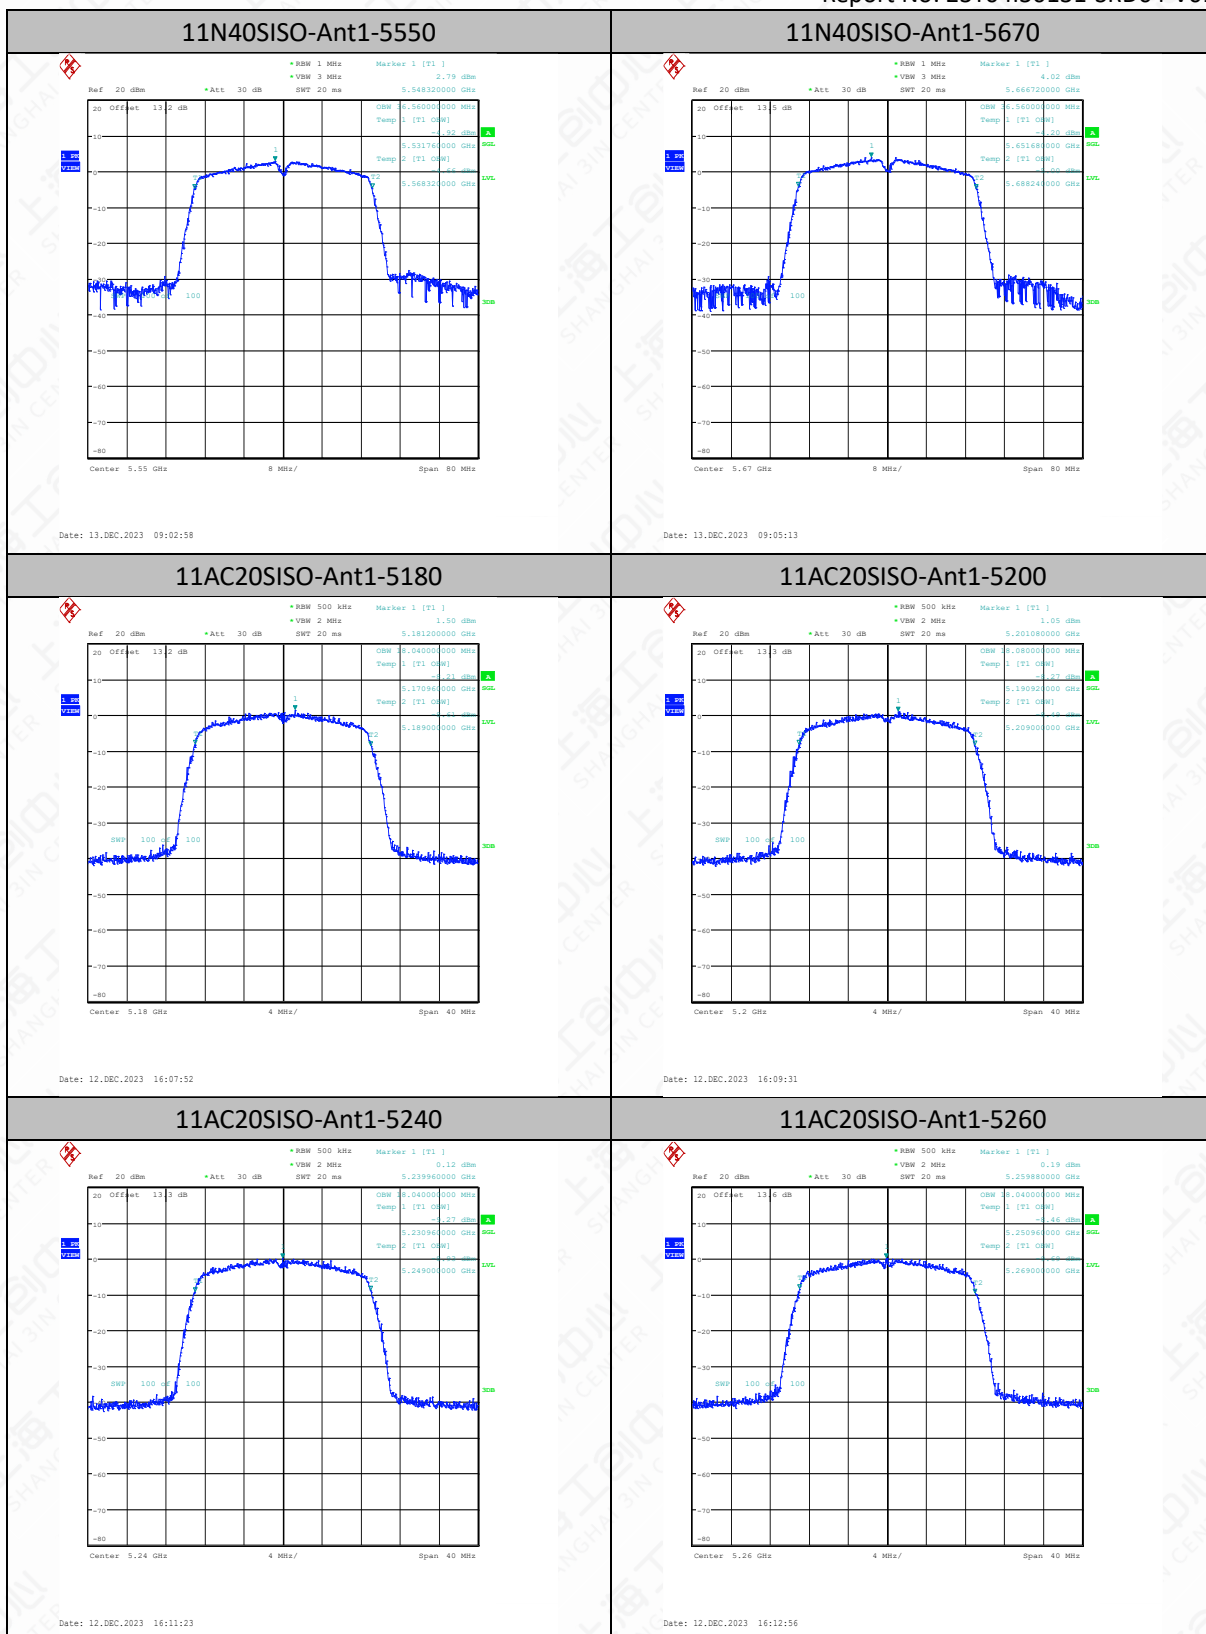


11AC20SISO-Ant1-5280

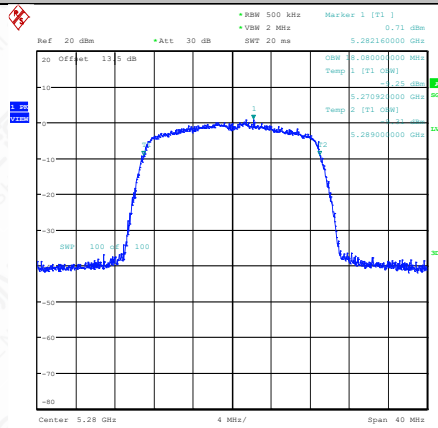


Date: 12,DEC,2023 16:14:23

11AC20SISO-Ant1-5320

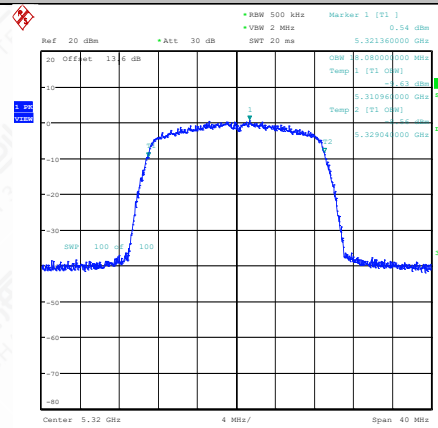


Date: 12,DEC,2023 16:16:03

11AC20SISO-Ant1-5500

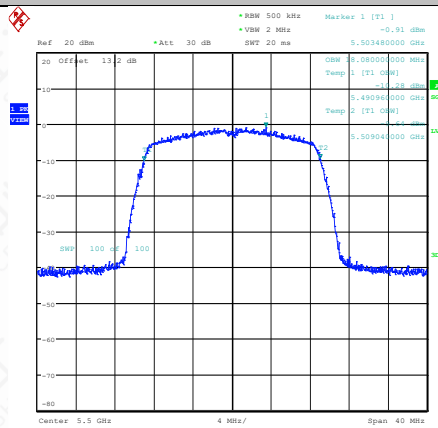


Date: 13,DEC,2023 09:07:08

11AC20SISO-Ant1-5580

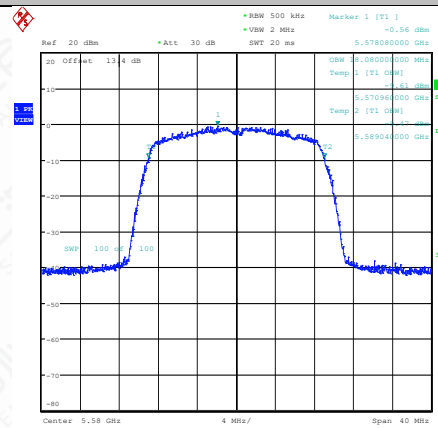


Date: 13,DEC,2023 09:08:37

11AC20SISO-Ant1-5700

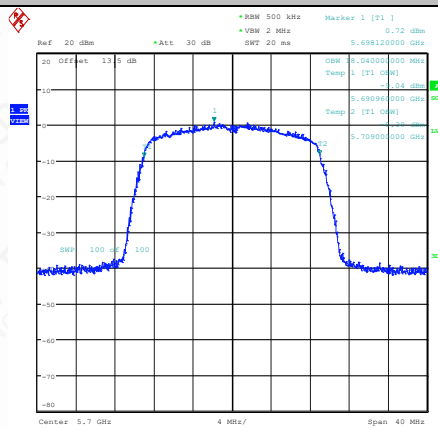


Date: 13,DEC,2023 09:10:21

11AC40SISO-Ant1-5190

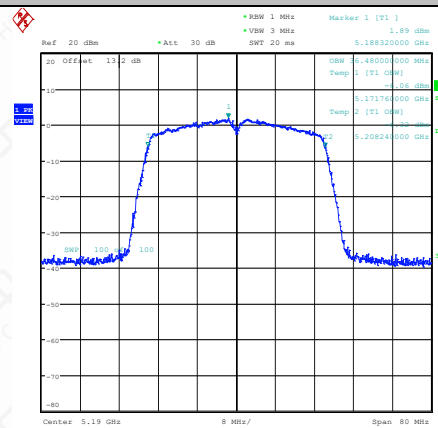


Date: 12,DEC,2023 16:17:51

11AC40SISO-Ant1-5230

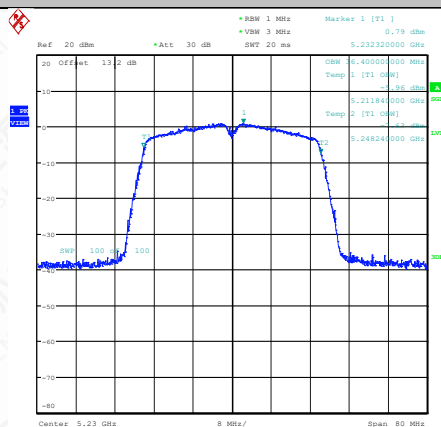


Date: 12 DEC 2023 16:19:32

11AC40SISO-Ant1-5270

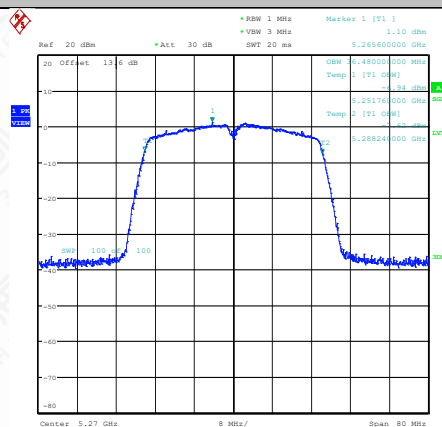


Date: 12 DEC 2023 16:21:06

11AC40SISO-Ant1-5310

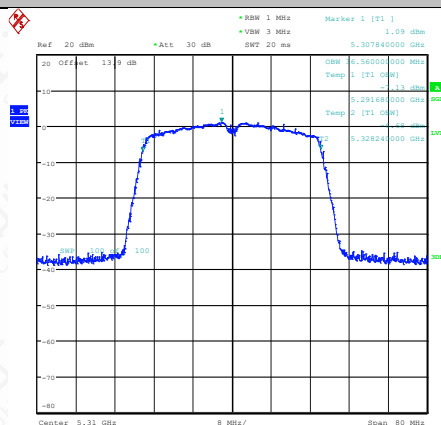


Date: 12.DEC.2023 16:22:27

11AC40SISO-Ant1-5510

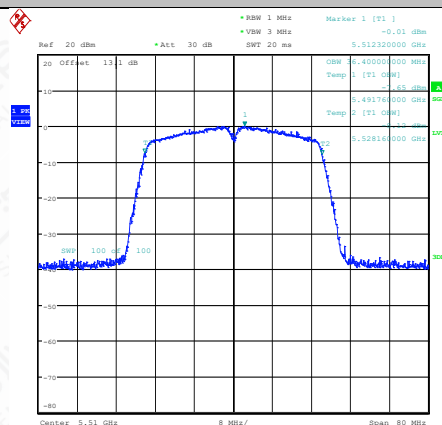


Date: 13.DEC.2023 09:15:19

11AC40SISO-Ant1-5550

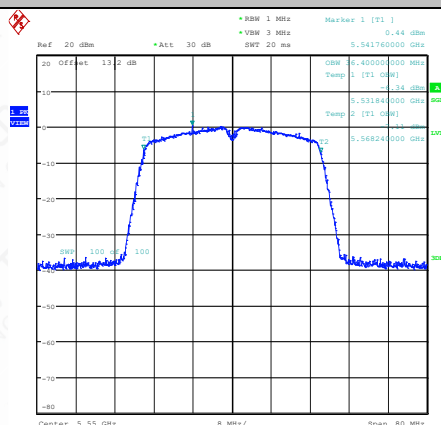


Date: 13.DEC.2023 09:16:48

11AC40SISO-Ant1-5670

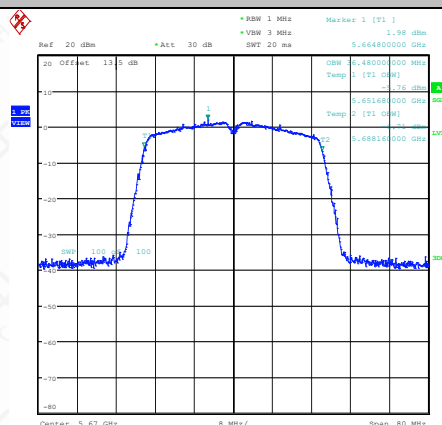

Date: 13.DEC.2023 09:18:38

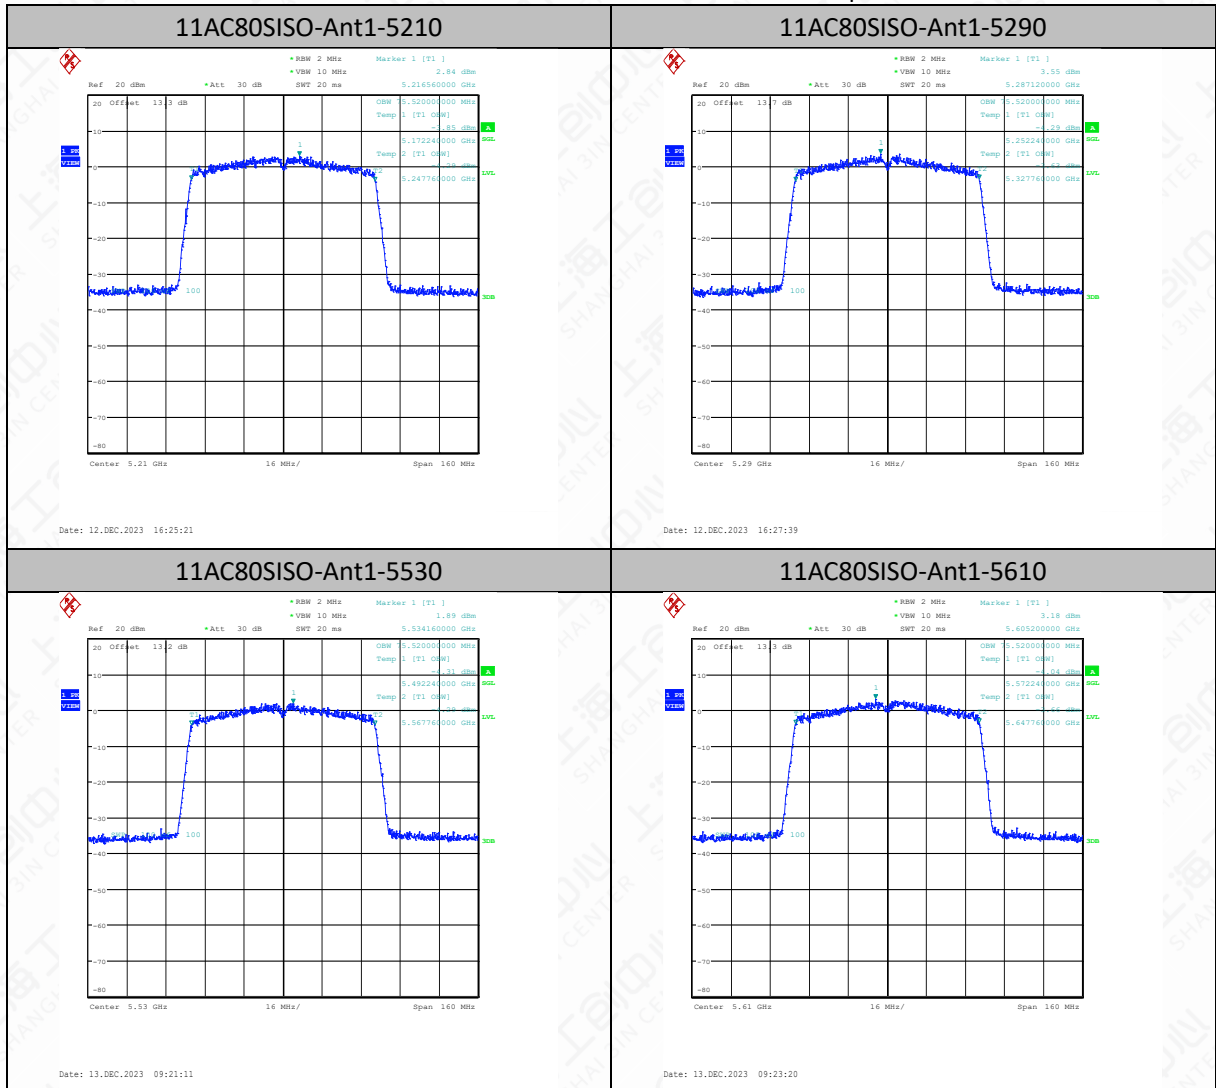

6.6. Band Edges Compliance

6.6.1 Measurement Limit

Above 1G, non-restricted band

Standard	EIRP Limit
15.407(b)	< -27dBm/MHz

Above 1G, Restricted band

Standard	EIRP Limit	
15.407(b)	< -27dBm/MHz	
15.209	Peak	74dBμV/m
	Average	54dBμV/m

$$\text{EIRP[dBm]} = \text{E[dB}\mu\text{V/m]} + 20 \log(d[\text{m}]) - 104.7$$

$$\text{E[dB}\mu\text{V/m]} = \text{EIRP[dBm]} - 20 \log(d[\text{m}]) + 104.7$$

$$\text{E[dB}\mu\text{V/m]} = \text{EIRP[dBm]} + 95.2 = 68.2, \text{ for } d = 3\text{m}$$

6.6.2 Test Procedure

The measurement is made according to KDB 789033.

Marker-Delta Method: The marker-delta method, as described in ANSI C63.10, can be used to perform measurements of the radiated unwanted emissions level of emissions provided that the 99% occupied bandwidth of the fundamental is within 2 MHz of the authorized band-edge.

Procedure for peak unwanted emissions measurements above 1000 MHz

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

a) Follow the requirements in 12.7.4.

b) Peak emission levels are measured by setting the instrument as follows:

- 1) RBW = 1 MHz.
- 2) VBW $\geq [3 \times \text{RBW}]$.
- 3) Detector = peak.
- 4) Sweep time = auto.
- 5) Trace mode = max hold.

6) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, then the time required for the trace to stabilize will increase by a factor of approximately $1/D$, where D is the duty cycle. For example, at 50% duty cycle, the measurement time will increase by a factor of two, relative to measurement time for continuous transmission.

Procedures for average unwanted emissions measurements above 1000 MHz

a) RBW = 1 MHz.

b) Video bandwidth:

1) If the EUT is configured to transmit with $D \geq 98\%$, then set $VBW \leq RBW / 100$ (i.e., 10 kHz), but not less than 10 Hz.

2) If the EUT D is $< 98\%$, then set $VBW \geq 1 / T$, where T is defined in item a1) of 12.2.

c) Video bandwidth mode or display mode:

1) The instrument shall be set with video filtering applied in the power domain. Typically, this requires setting the detector mode to RMS (power averaging) and setting the average-VBW type to power (rms).

2) As an alternative, the instrument may be set to linear detector mode. Video filtering shall be applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode to accomplish this. Others have a setting for average-VBW type, which can be set to "voltage" regardless of the display mode.

d) Detector = peak.

e) Sweep time = auto.


f) Trace mode = max hold.

g) Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where D is the duty cycle. For example, use at least 200 traces if the duty cycle is 25%. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 50 traces should be averaged.)

The measurement was applied in a fully anechoic chamber. While testing for spurious emission higher than 1GHz, if applied, the pre-amplifier would be equipped just at the output terminal of the antenna. Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turntable rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. During the tests, the antenna height varied from 1m to 4m and the EUT azimuth were varied from 0° to 360° in order to identify the maximum level of emissions from the EUT. In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level. This


maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

6.6.3 Test Setup

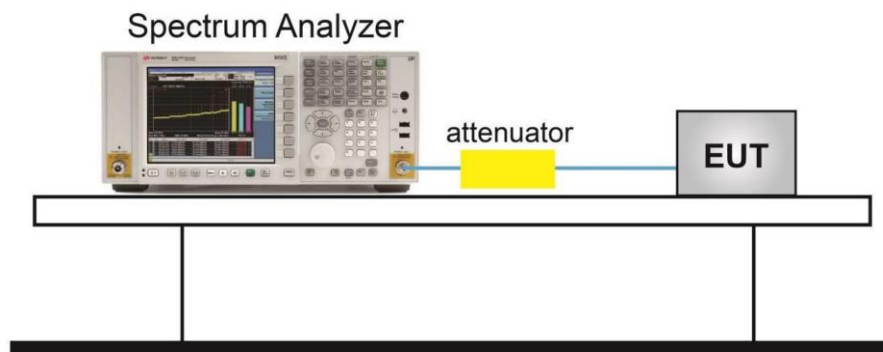


6.6.4 Measurement Result

Mainly Supply (S14)

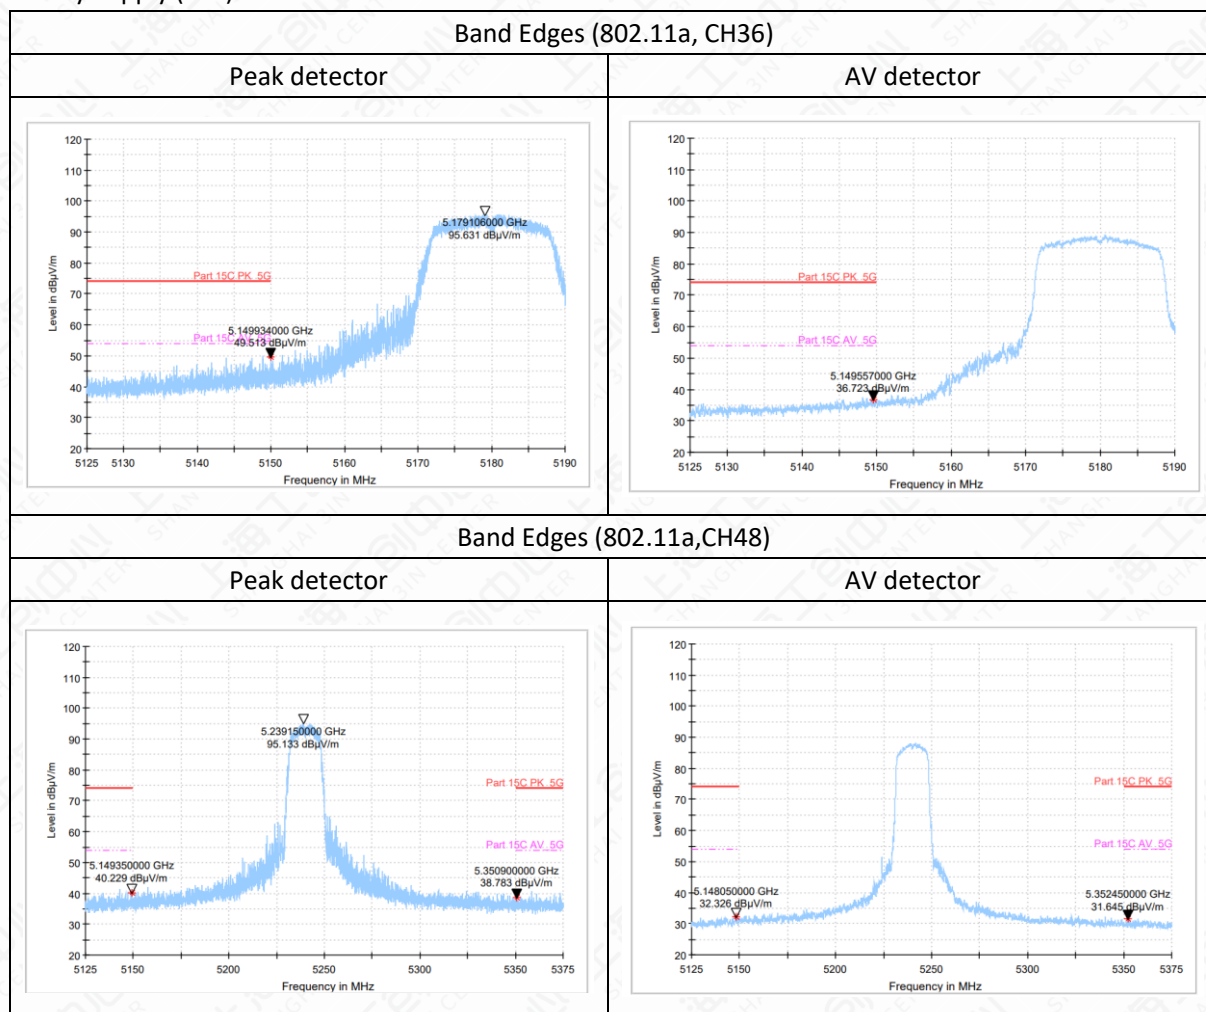


Band Edges (802.11a, CH52)

Peak detector

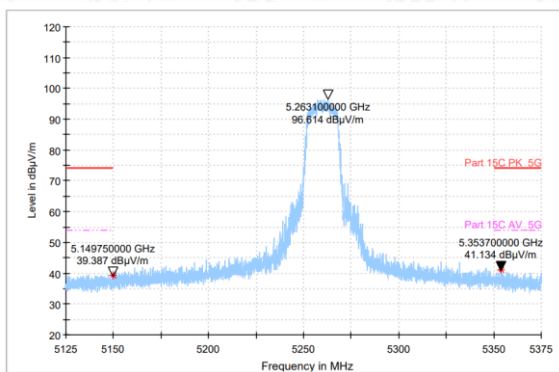


AV detector

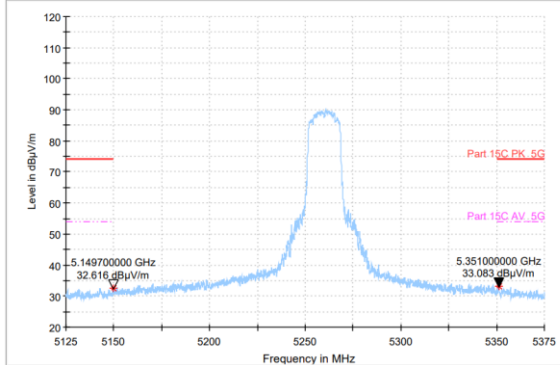


Band Edges (802.11a, CH64)

Peak detector

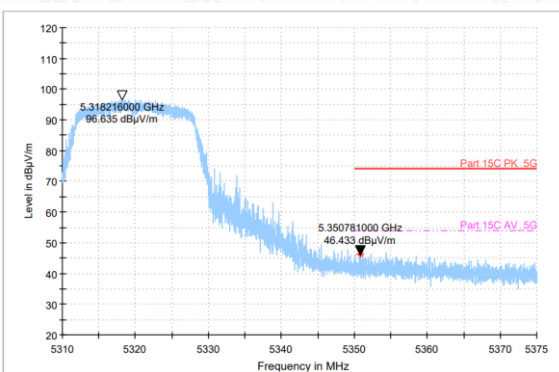


AV detector

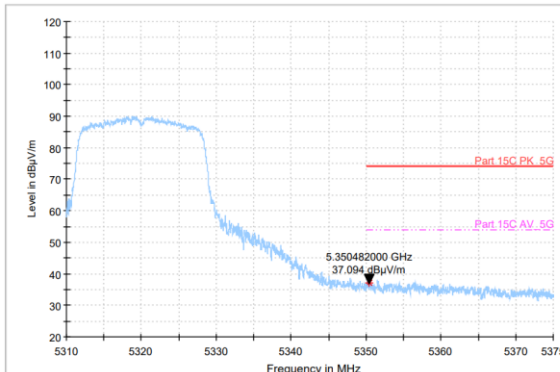


Band Edges (802.11a, CH100)

Peak detector

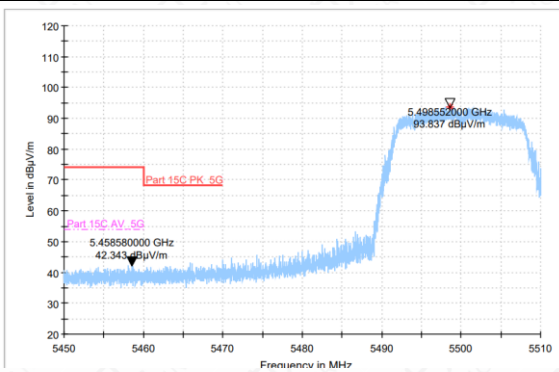


AV detector

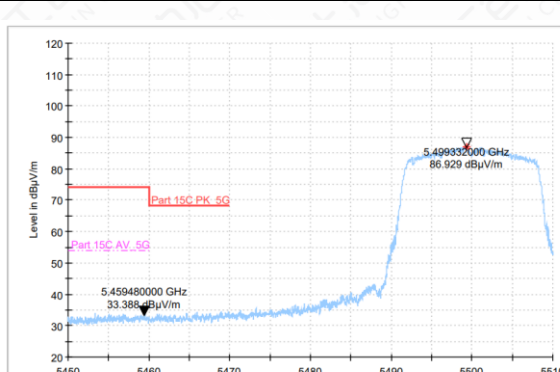


Band Edges (802.11a, CH140)

Peak detector

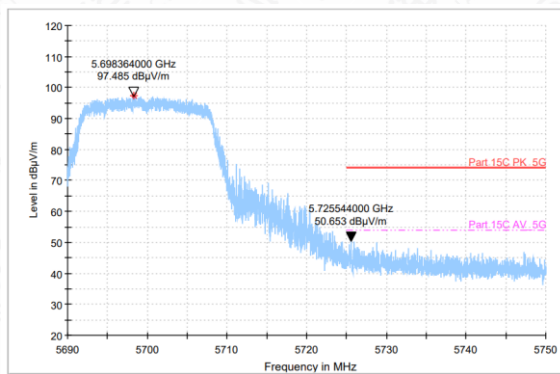


AV detector

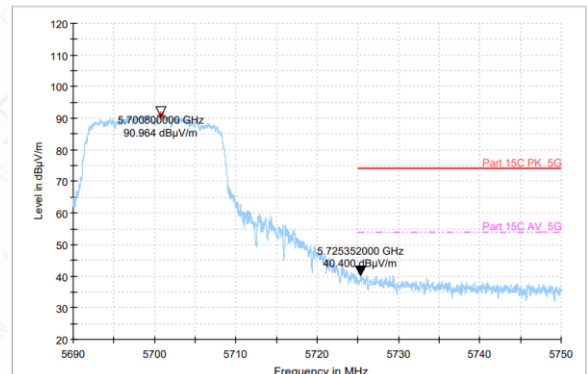


Band Edges (802.11n 20M, CH36)

Peak detector

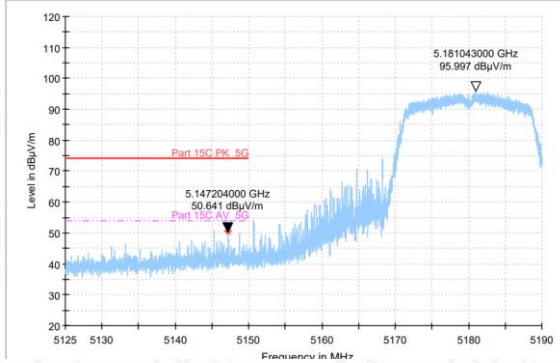


AV detector

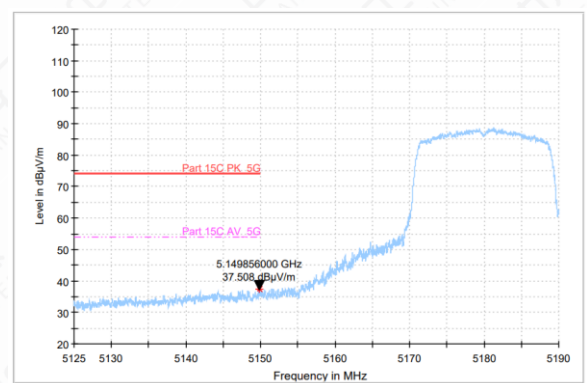


Band Edges (802.11n 20M, CH48)


Peak detector

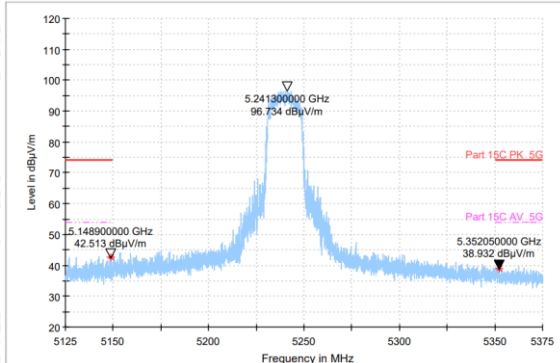


AV detector

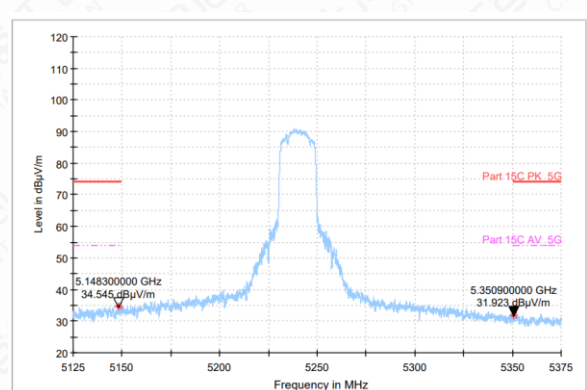


Band Edges (802.11n 20M, CH52)

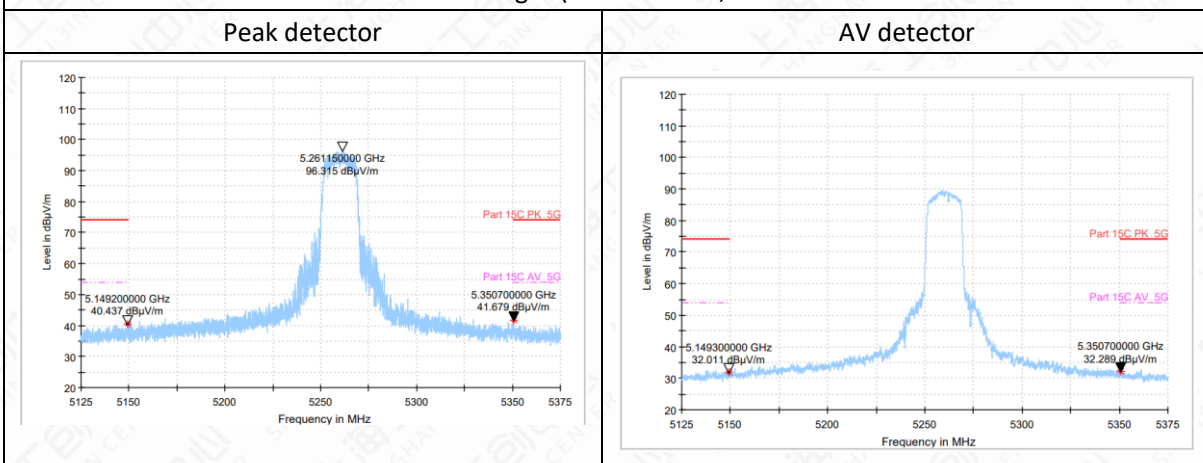

Band Edges (802.11n 20M, CH64)

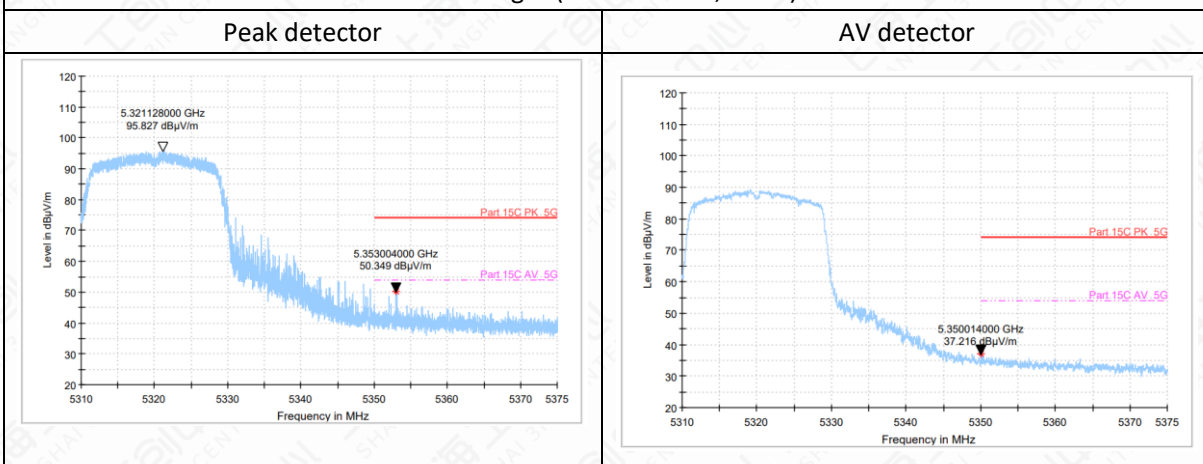


Band Edges (802.11n 20M, CH100)

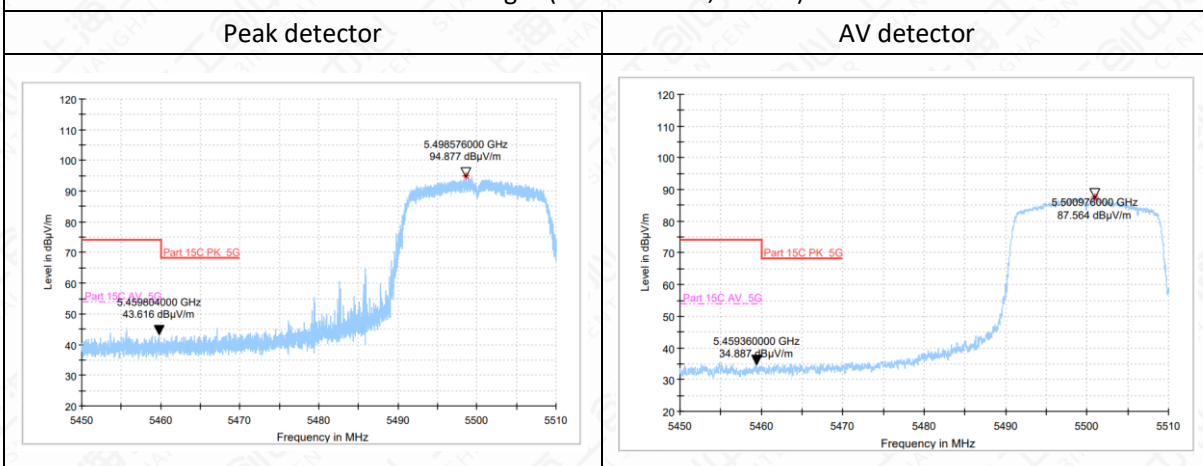


Band Edges (802.11n 20M, CH140)

Peak detector

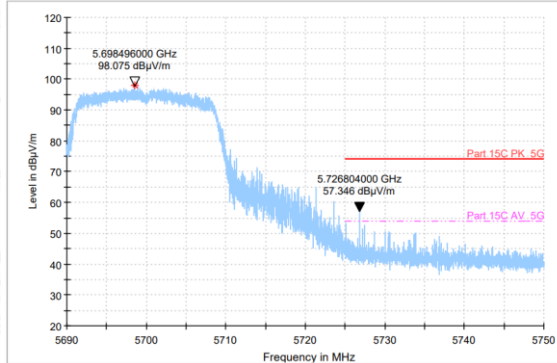


AV detector

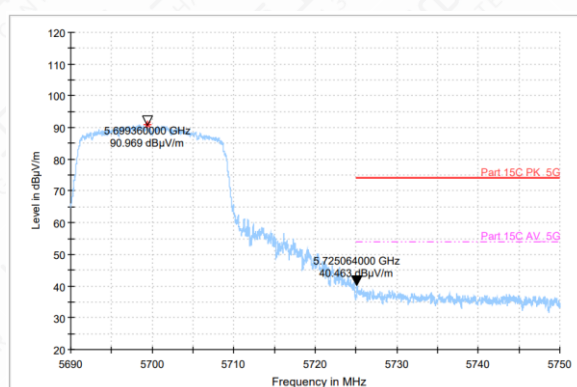


Band Edges (802.11n 40M, CH38)

Peak detector

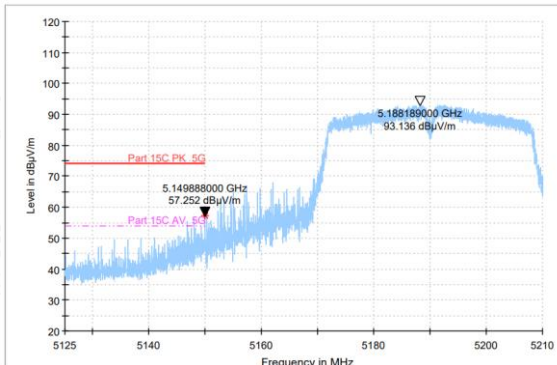


AV detector

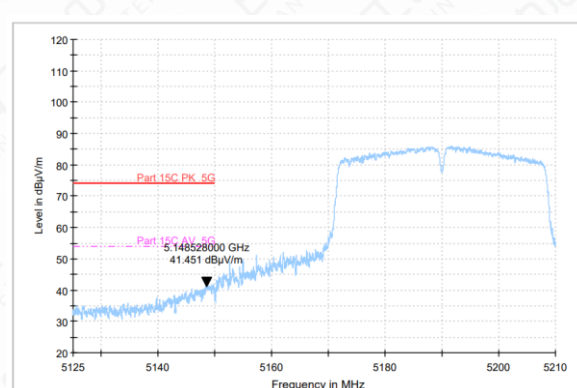


Band Edges (802.11n 40M, CH46)

Peak detector

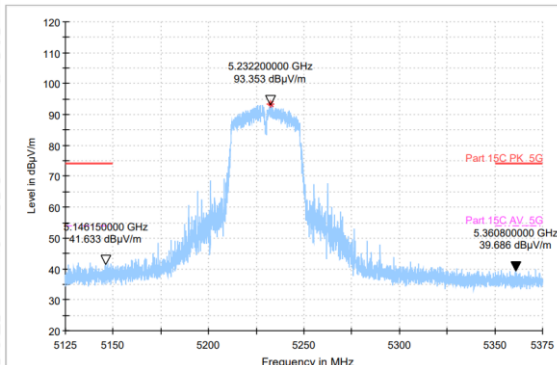


AV detector

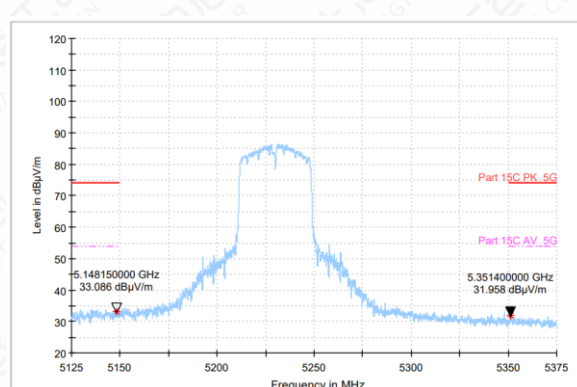


Band Edges (802.11n 40M, CH54)

Peak detector

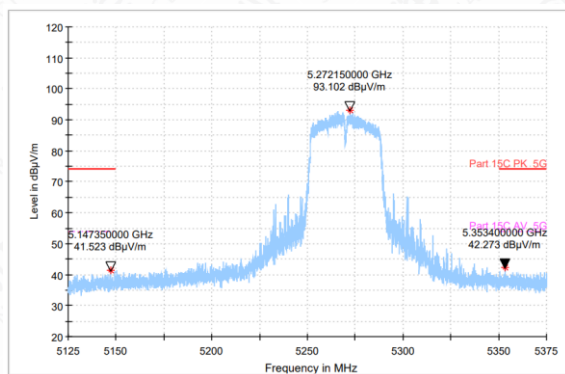


AV detector

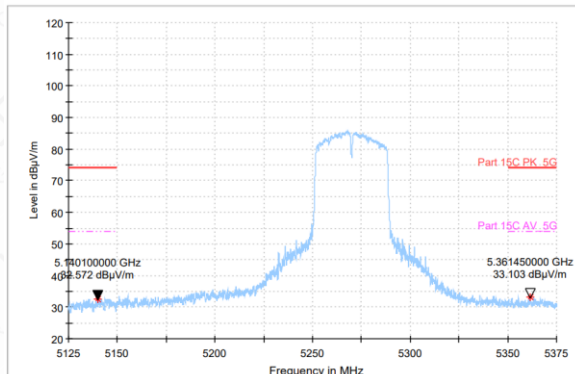


Band Edges (802.11n 40M, CH62)

Peak detector

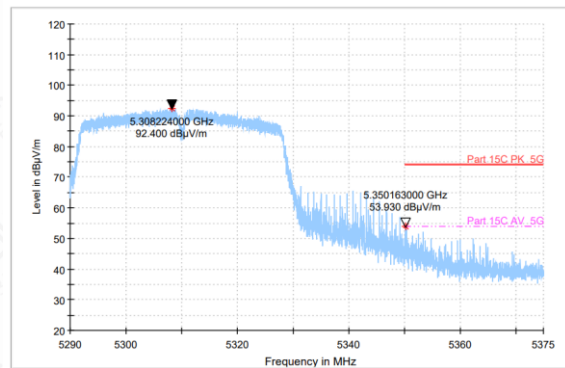


AV detector

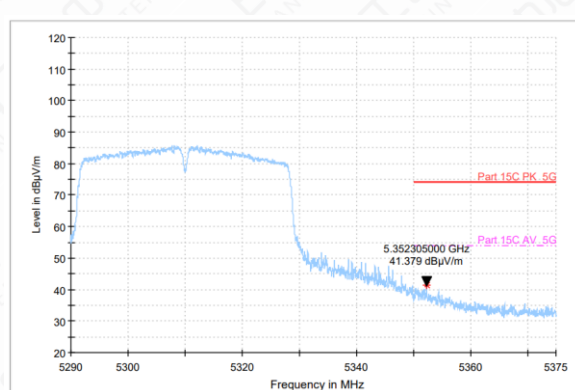


Band Edges (802.11n 40M, CH102)

Peak detector

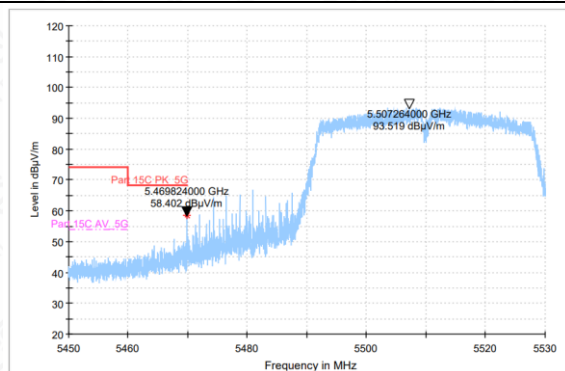


AV detector

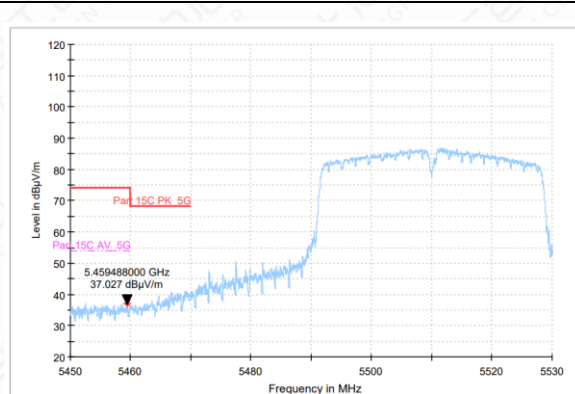


Band Edges (802.11n 40M, CH134)

Peak detector

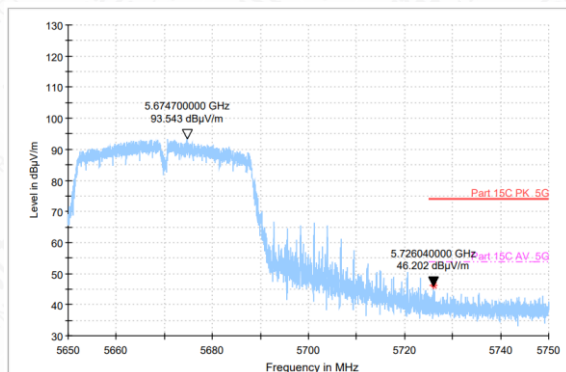


AV detector

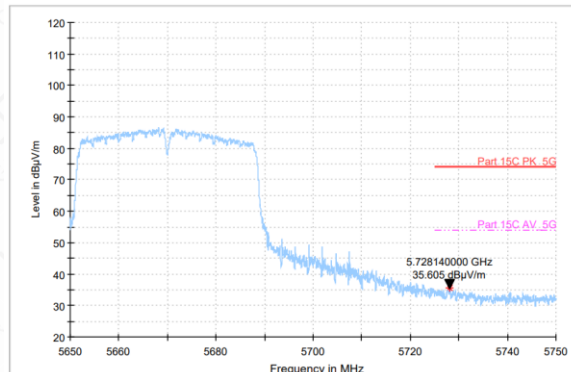


Band Edges (802.11ac 20M, CH36)

Peak detector

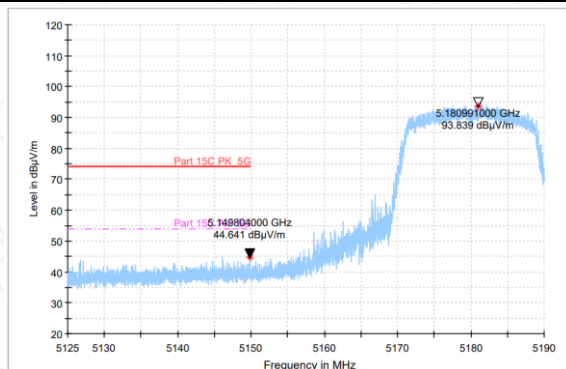


AV detector

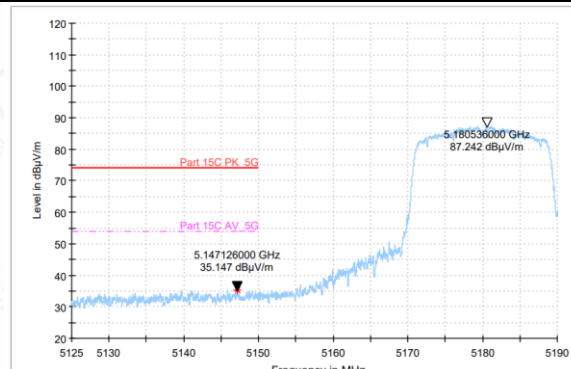


Band Edges (802.11 ac 20M, CH48)

Peak detector

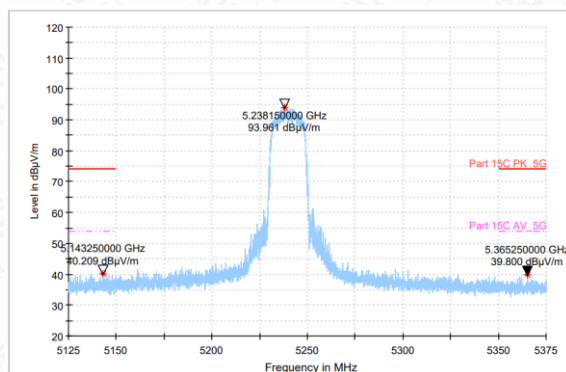


AV detector

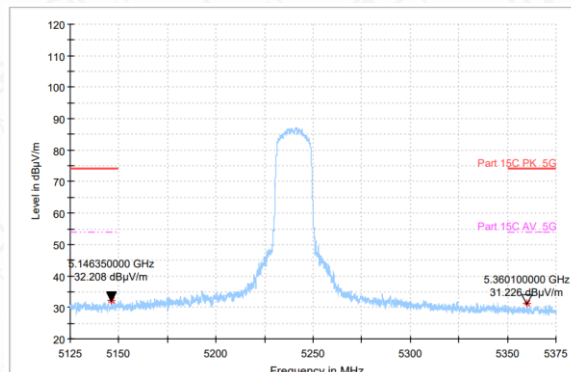


Band Edges (802.11 ac 20M, CH52)

Peak detector

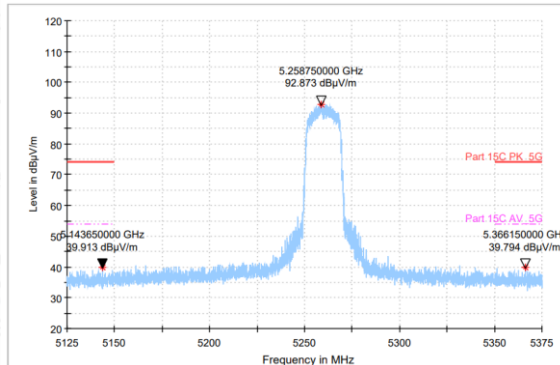


AV detector

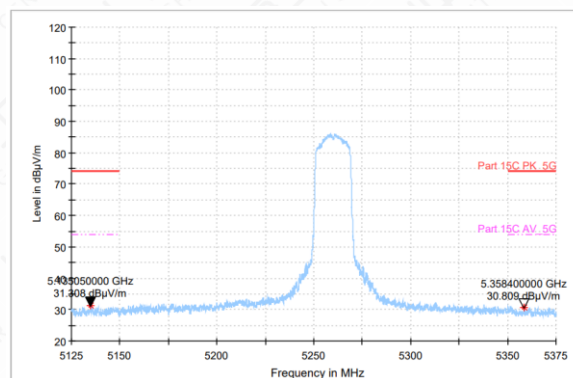


Band Edges (802.11 ac 20M, CH64)

Peak detector

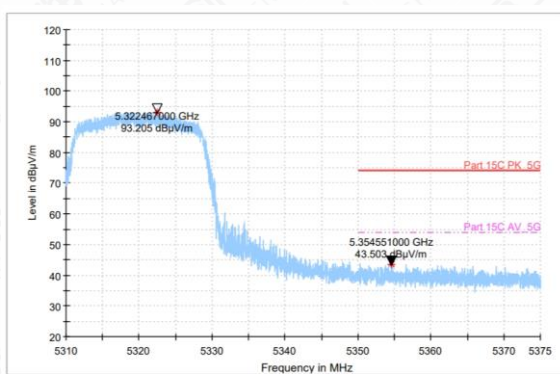


AV detector

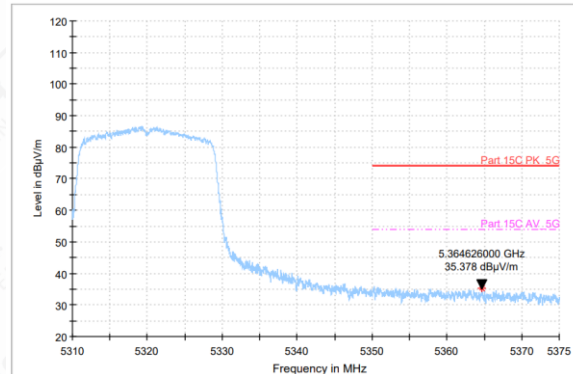


Band Edges (802.11 ac 20M, CH100)

Peak detector

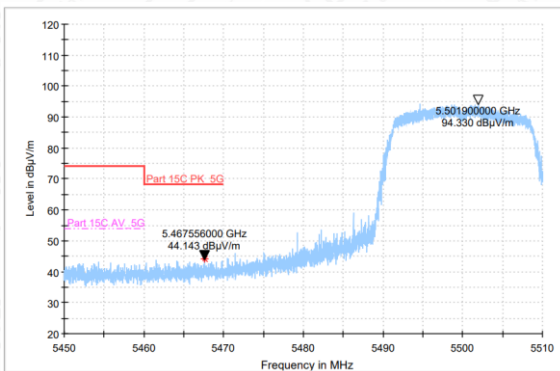


AV detector

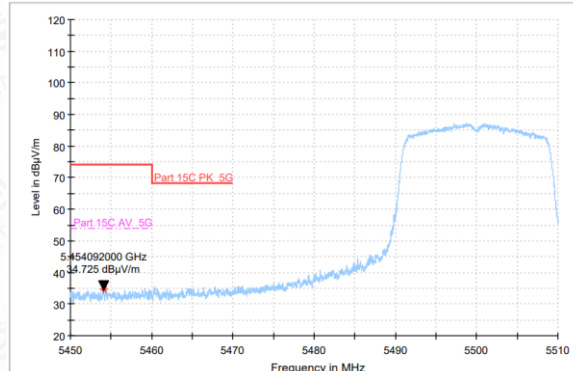


Band Edges (802.11 ac 20M, CH140)

Peak detector

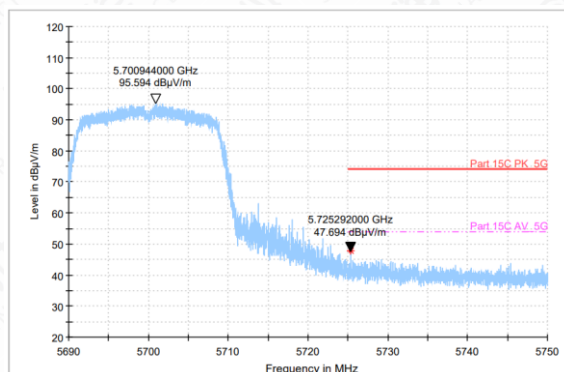


AV detector

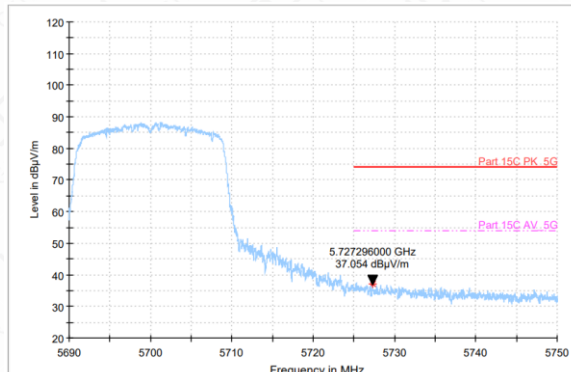


Band Edges (802.11ac 40M, CH38)

Peak detector

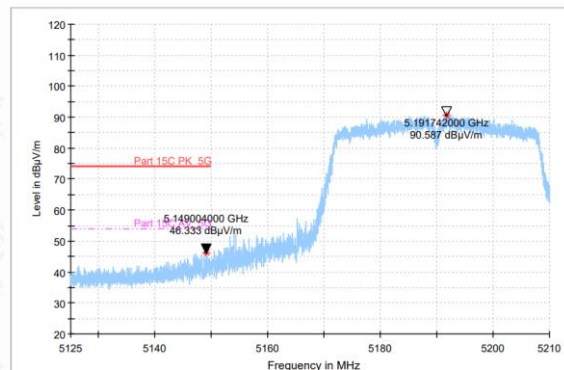


AV detector

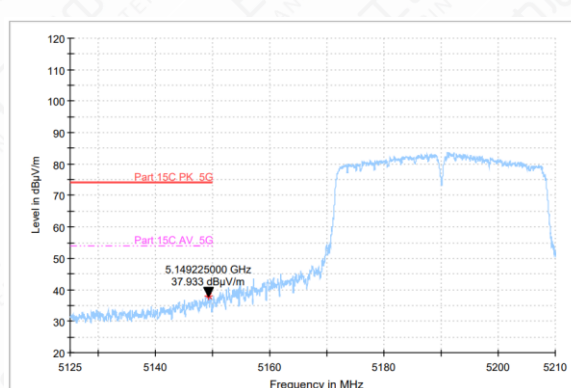


Band Edges (802.11 ac 40M, CH46)

Peak detector

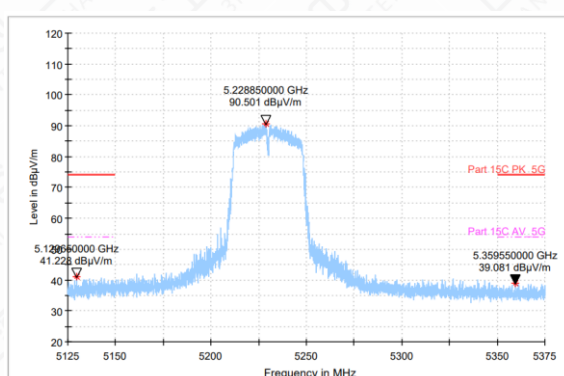


AV detector

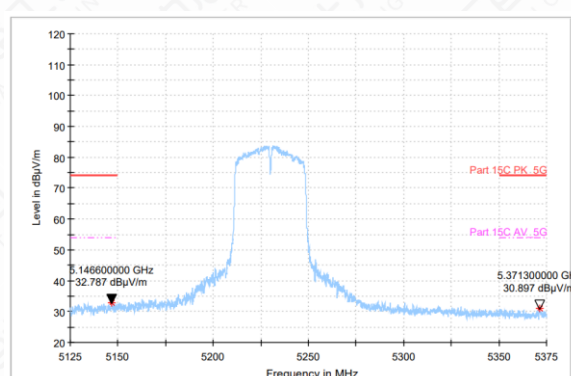


Band Edges (802.11 ac 40M, CH54)

Peak detector

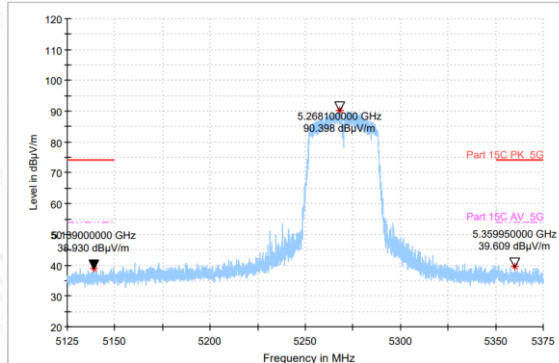


AV detector

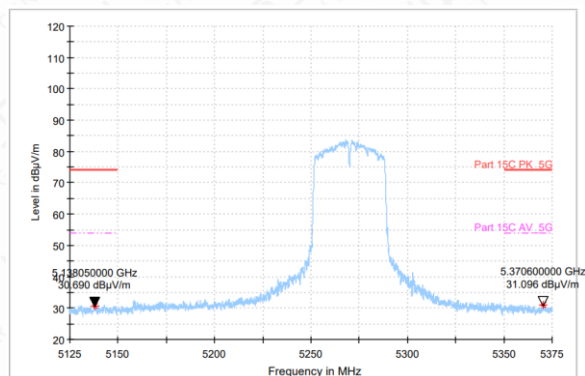


Band Edges (802.11 ac 40M, CH62)

Peak detector

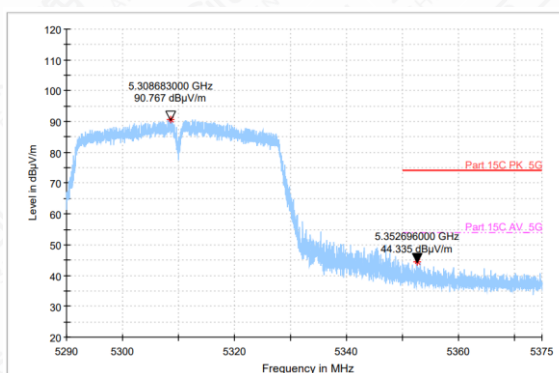


AV detector

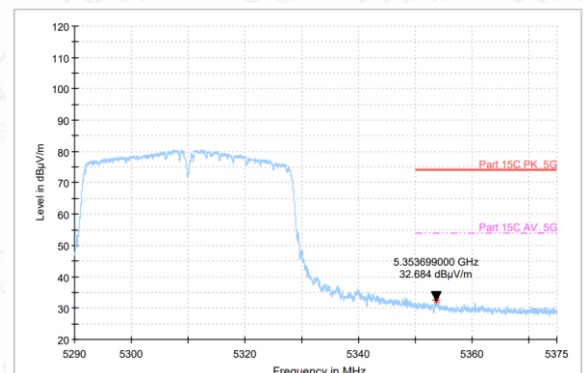


Band Edges (802.11 ac 40M, CH102)


Peak detector

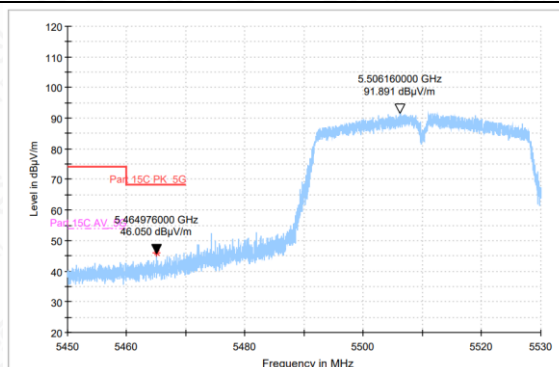


AV detector

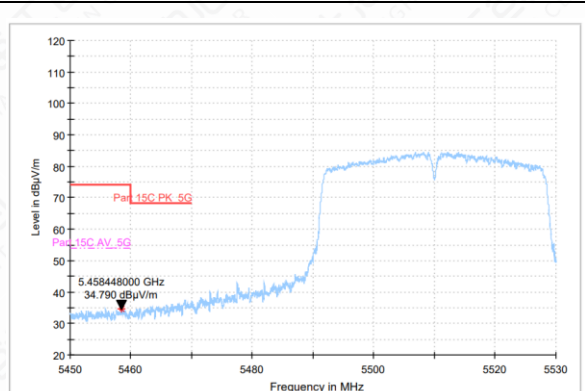

Band Edges (802.11 ac 40M, CH134)

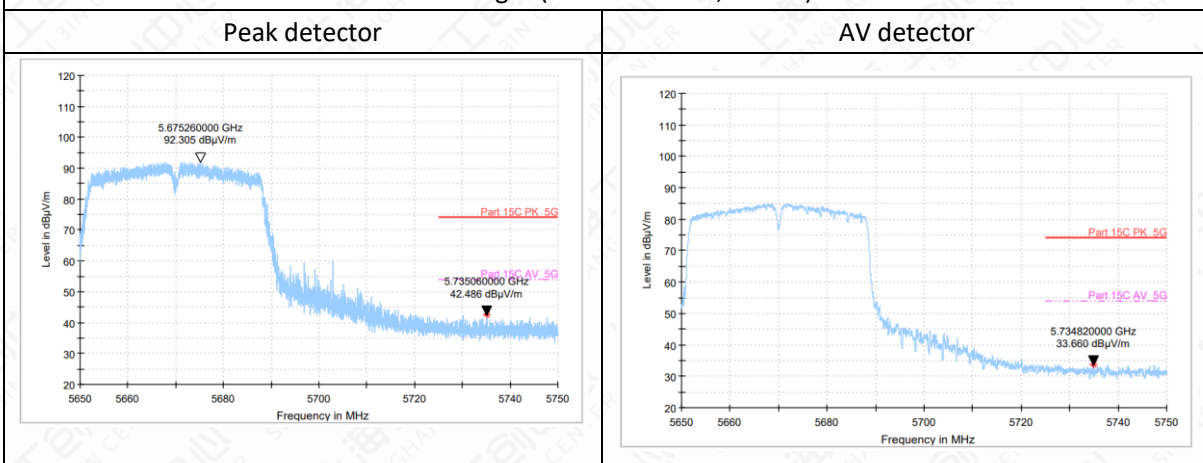

Band Edges (802.11 ac 80M, CH42)

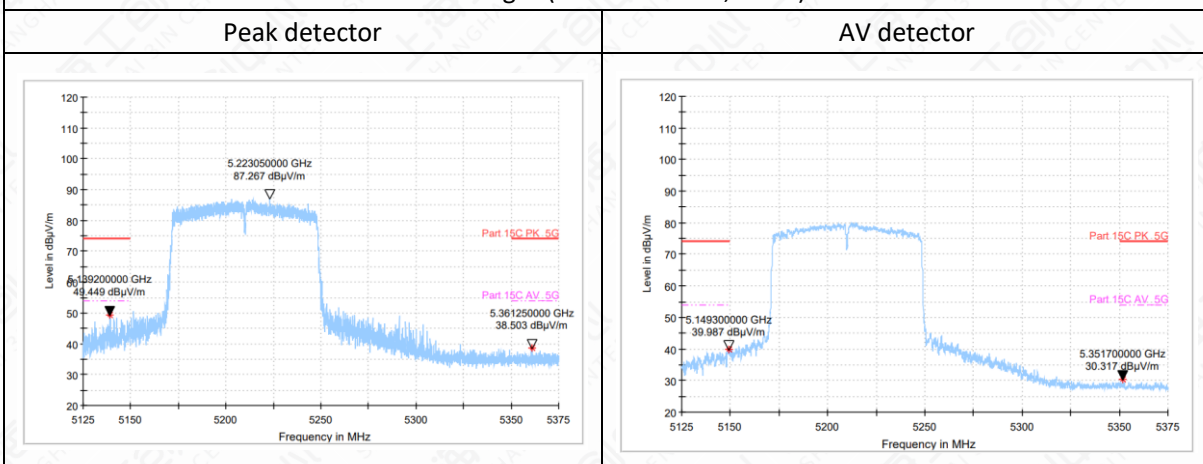

Band Edges (802.11n 80M, CH58)

