

TEST REPORT

Applicant Name : Shen Zhen Dong Hua Xiang Technology Co., Ltd.
Address : 4th Floor, Building B, Jinye Industrial Zone, 31 Queshan Road, Dalang Street, Longhua District, Shenzhen
Report Number : SZNS1211118-59480E-RF
FCC ID: 2A3PC-DX01

Test Standard (s)
FCC PART 15.247

Sample Description


Product Type: Wireless microphone
Model No.: DX01
Multiple Model(s) No.: DX02, DX06, DX08, DX09, DX10, DX12, DX18, H6, H8, H1
Trade Mark: N/A
Date Received: 2021-11-18
Date of Test: 2021-11-26 to 2021-11-29
Report Date: 2021-11-30

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Approved By:




Black Ding
EMC Engineer

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk “*”. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China

Tel: +86 755-26503290

Fax: +86 755-26503396

Web: www.atc-lab.com

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE.....	12
APPLICABLE STANDARD	12
TEST RESULT:	12
FCC §15.203 – ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP.....	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE	15
TRANSD FACTOR & MARGIN CALCULATION	15
TEST DATA	15
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	20
APPLICABLE STANDARD	20
EUT SETUP.....	20
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	21
TEST PROCEDURE	21
FACTOR & MARGIN CALCULATION	21
TEST DATA	21
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST DATA	29
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH.....	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST DATA	33

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	44
APPLICABLE STANDARD	44
TEST PROCEDURE	44
TEST DATA	44
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	47
APPLICABLE STANDARD	47
TEST PROCEDURE	47
TEST DATA	47
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT.....	57
APPLICABLE STANDARD	57
TEST PROCEDURE	57
TEST DATA	57
FCC §15.247(d) - BAND EDGES TESTING	63
APPLICABLE STANDARD	63
TEST PROCEDURE	63
TEST DATA	63

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Wireless microphone
Tested Model No.	DX01
Multiple Model	DX02, DX06, DX08, DX09, DX10, DX12, DX18, H6, H8, H1
Model difference*	Refer to the DoS letter
Frequency Range	2402~2480MHz
Maximum conducted Peak output power	5.71dBm
Modulation Technique	GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification*	Internal Antenna: 3.5dBi(provided by the applicant)
Voltage Range	DC5V from adapter or Charging Box or DC3.7V from battery
Sample number	SZNS1211118-59480E-RF-S1 (Assigned by ATC)
Sample/EUT Status	Good condition

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz- 18GHz	4.98dB
	18GHz- 26.5GHz	5.06dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

Test mode 1: Charging by Charging Box + BT Transmitting

Test mode 2: Charging by Adapter + BT Transmitting

EUT Exercise Software

Software "FCC tool V1.0.0"* was used during testing and the power level was 21*.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
SHENZHEN KEYU POWER SUPPLY TECHNOLOGY CO., LTD	Adapter	KA1803A-US	E470034


External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	0.25	EUT/Charging box	Adapter


Block Diagram of Test Setup

For conducted emission:

Test mode 1:

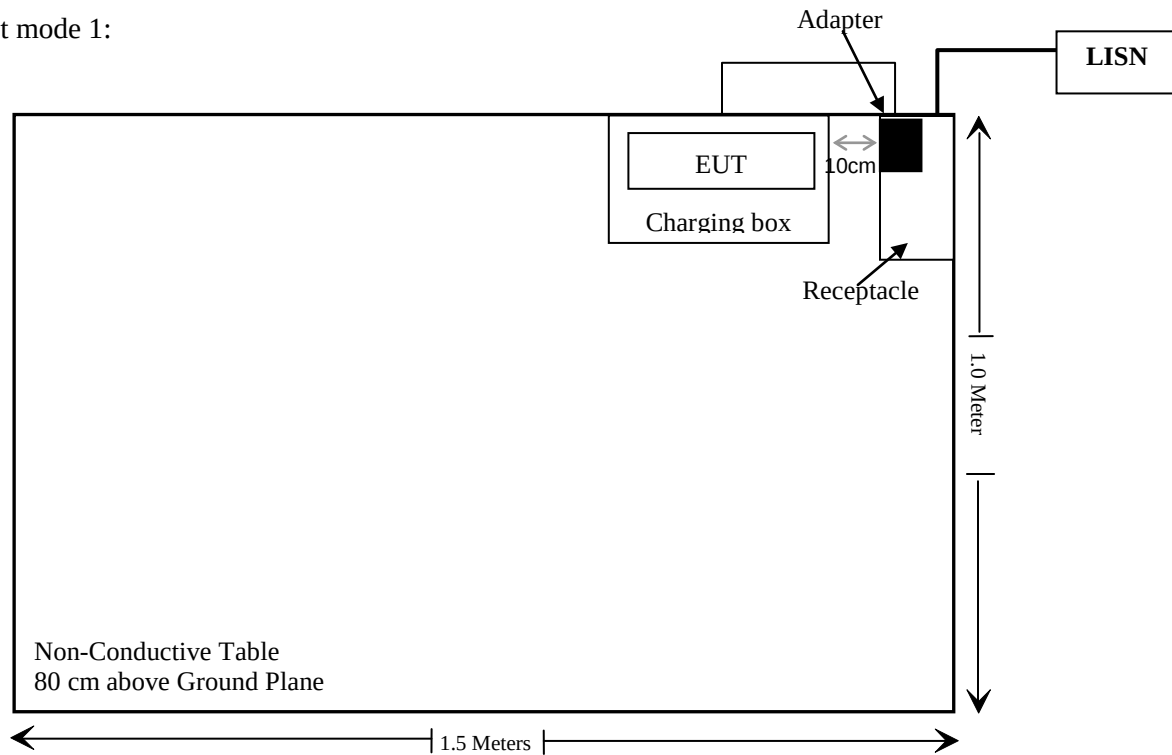


Test mode 2:

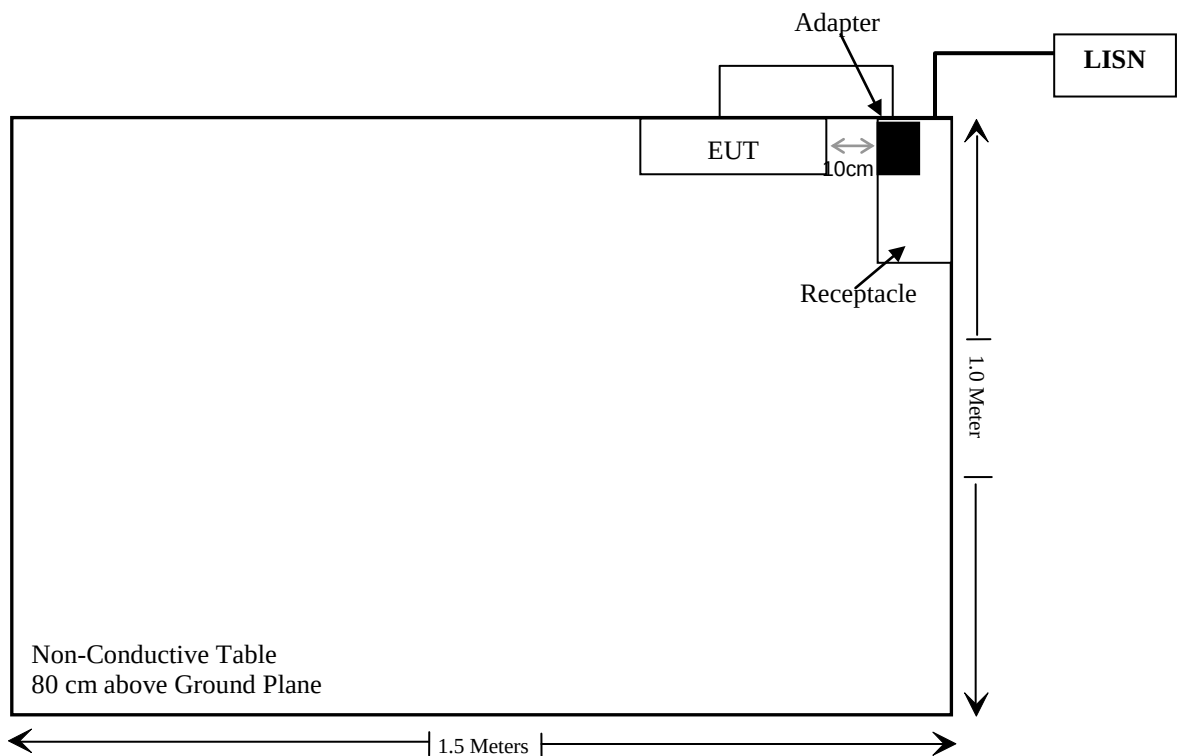


For radiated emission:


Below 1GHz:

Test mode 1:

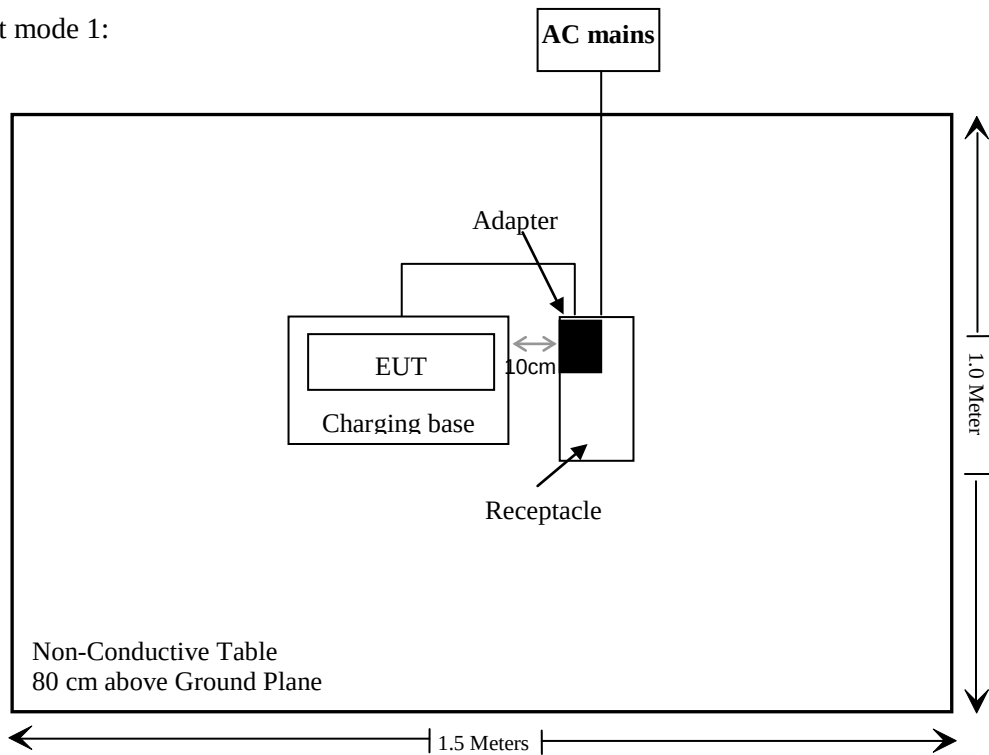

Test mode 2:

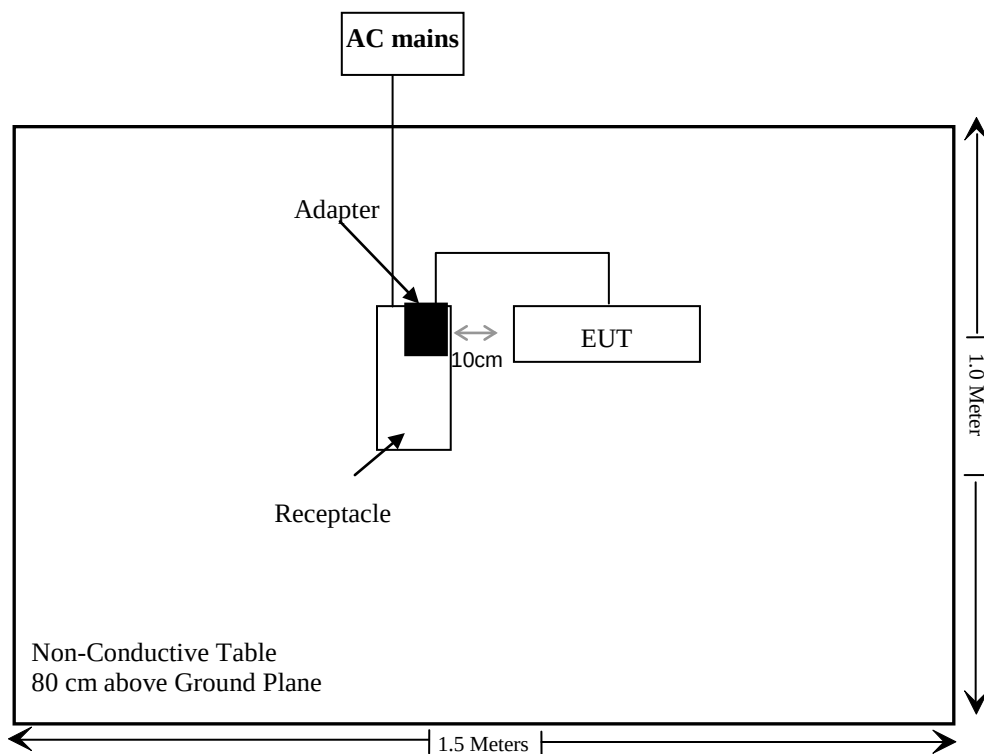

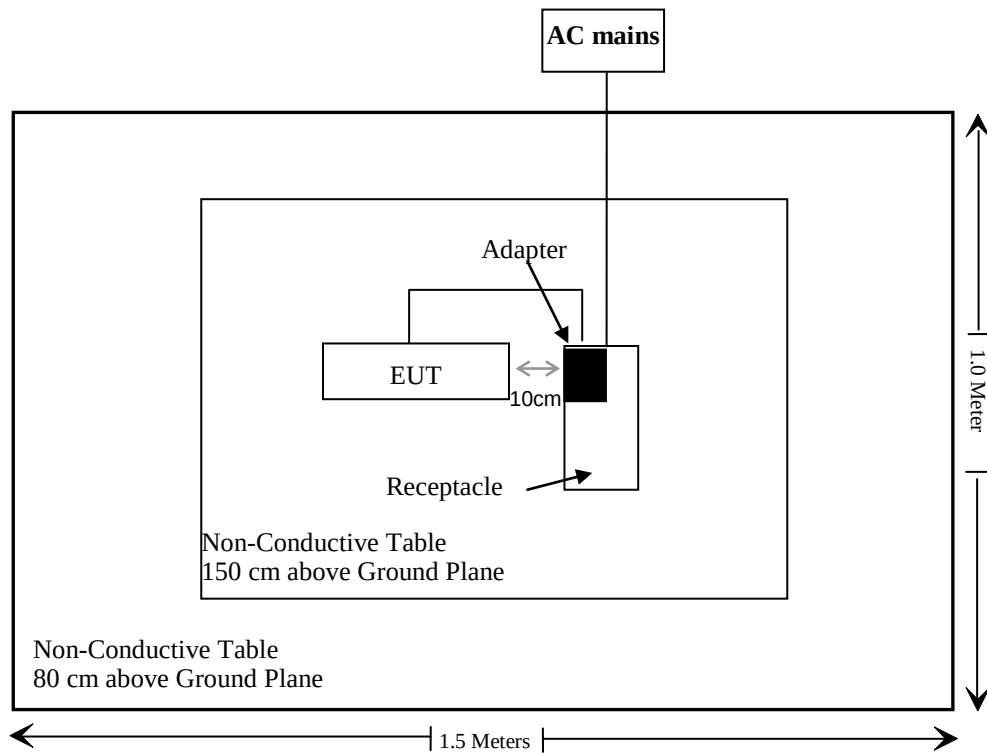Above 1GHz:

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC§15.247 (i), §1.1310 & §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2021/02/03	2022/02/02
R & S	L.I.S.N.	ENV216	101314	2020/12/25	2021/12/24
Anritsu Corp	50Ω Coaxial Switch	MP59B	6200506474	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-2m	No.2	2020/12/25	2021/12/24
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde&Schwarz	Test Receiver	ESR	101817	2020/12/24	2021/12/23
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2020/12/24	2021/12/23
A.H. Systems, inc.	Preamplifier	PAM-0118P	531	2021/11/09	2022/11/08
SONOMA INSTRUMENT	Amplifier	310 N	186131	2020/12/25	2021/12/24
Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2020/11/28	2021/11/27
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2020/12/25	2021/12/24
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2020/01/04	2023/01/03
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-5m	No.3	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.5	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-10m	No.7	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-2m	No.8	2020/12/25	2021/12/24
Radiated Emission Test Software: e3 19821b(V9)					
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV40	101495	2020/12/24	2021/12/23
Rohde & Schwarz	Open Switch and Control Unit	OSP120 +OSP -B157	101244 + 100866	2020/12/24	2021/12/23

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1310 & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Test Result:

For worst case:

Mode	Frequency (MHz)	Maximum Tune-up power		Calculated Distance (mm)	Calculated Value	Threshold (1-g SAR)	SAR Test Exclusion
		(dBm)	(mW)				
Bluetooth	2480	6.0	3.98	5	1.3	3.0	Yes

Result: No Standalone SAR test is required

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal Antenna arrangement, which was permanently attached and the antenna gain is 3.5dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

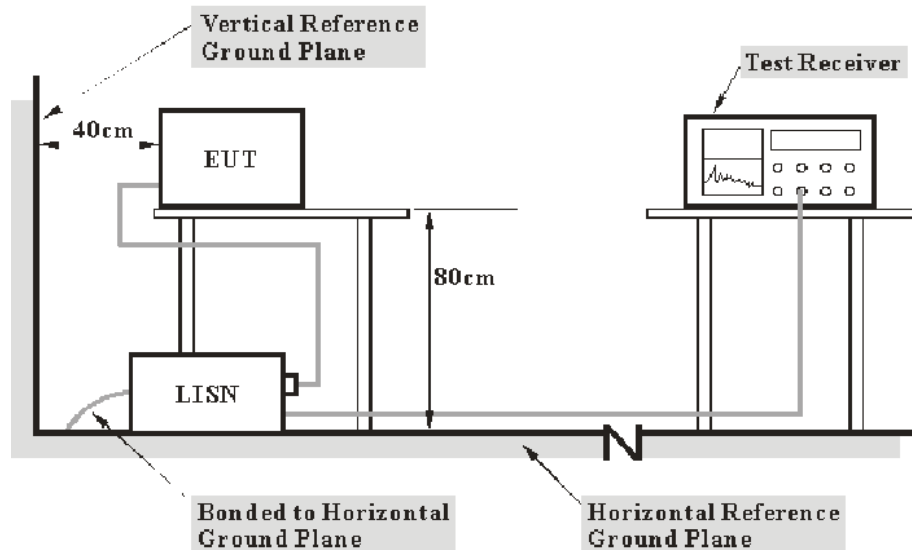

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correct Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Bin Duan on 2021-11-26.


EUT operation mode: Test mode 1& 2

Test mode1
AC 120V/60 Hz, Line

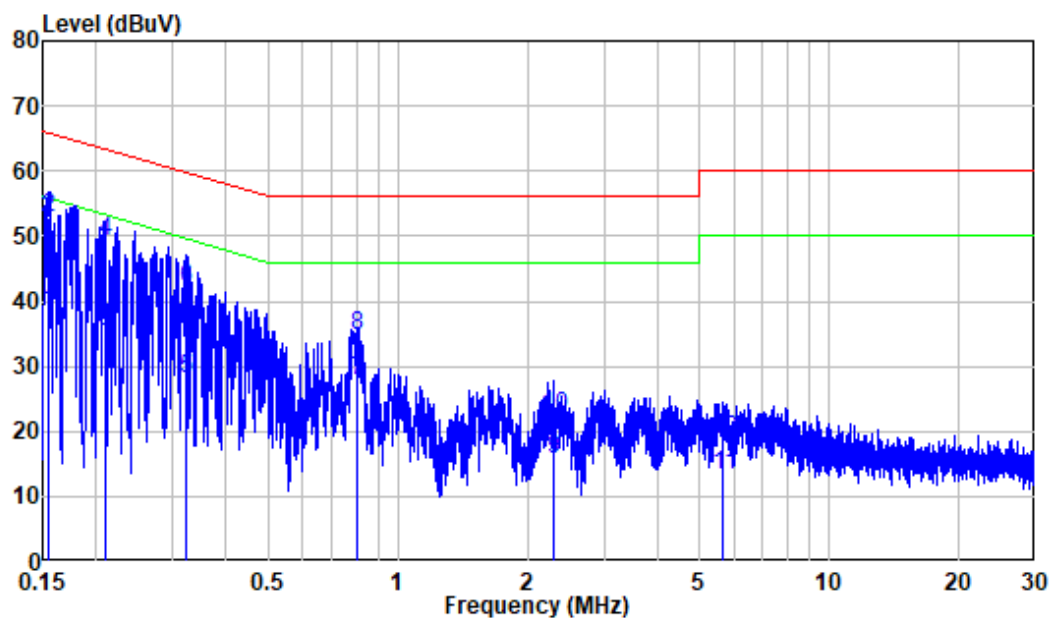

Site : Shielding Room
 Condition: Line
 Mode : Charging by Charging Box+Transmitting
 Model : DX01


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.156	9.89	28.49	38.38	55.70	-17.32	Average
2	0.156	9.89	42.80	52.69	65.70	-13.01	QP
3	0.209	9.80	25.51	35.31	53.25	-17.94	Average
4	0.209	9.80	39.28	49.08	63.25	-14.17	QP
5	0.323	9.80	18.34	28.14	49.62	-21.48	Average
6	0.323	9.80	32.19	41.99	59.62	-17.63	QP
7	0.807	9.81	17.87	27.68	46.00	-18.32	Average
8	0.807	9.81	24.77	34.58	56.00	-21.42	QP
9	2.294	9.92	5.82	15.74	46.00	-30.26	Average
10	2.294	9.92	12.53	22.45	56.00	-33.55	QP
11	5.668	10.02	3.20	13.22	50.00	-36.78	Average
12	5.668	10.02	8.81	18.83	60.00	-41.17	QP

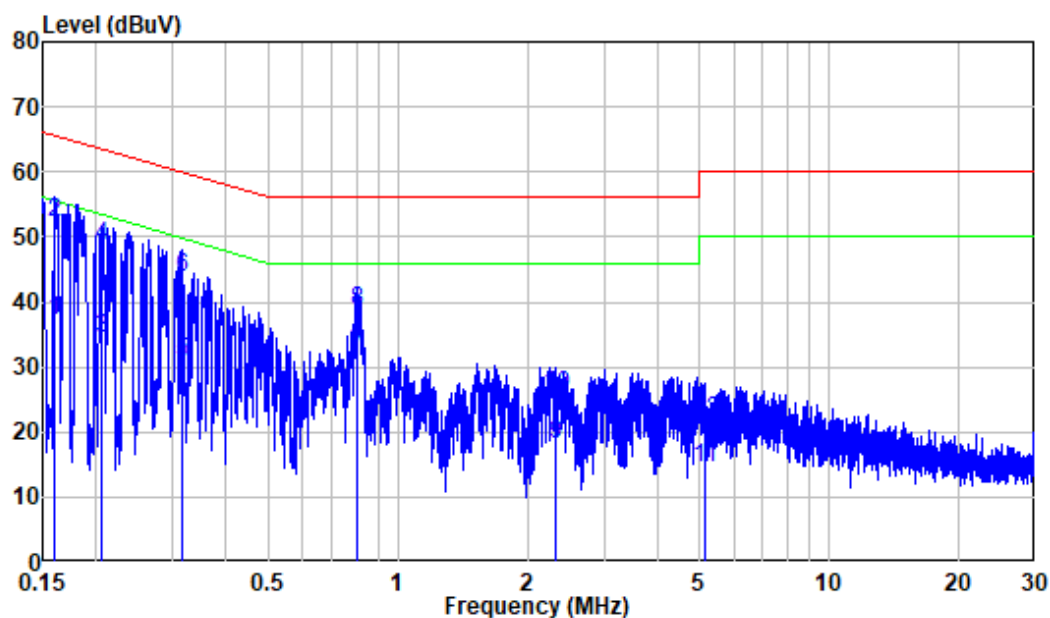AC 120V/60 Hz, Neutral

Site : Shielding Room
 Condition: Neutral
 Mode : Charging by Charging Box+Transmitting
 Model : DX01


	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.160	9.92	27.12	37.04	55.47	-18.43	Average
2	0.160	9.92	42.41	52.33	65.47	-13.14	QP
3	0.205	10.00	24.39	34.39	53.41	-19.02	Average
4	0.205	10.00	38.66	48.66	63.41	-14.75	QP
5	0.315	9.95	20.92	30.87	49.85	-18.98	Average
6	0.315	9.95	33.76	43.71	59.85	-16.14	QP
7	0.801	9.91	22.01	31.92	46.00	-14.08	Average
8	0.801	9.91	28.70	38.61	56.00	-17.39	QP
9	2.329	9.94	8.25	18.19	46.00	-27.81	Average
10	2.329	9.94	15.78	25.72	56.00	-30.28	QP
11	5.139	10.05	4.29	14.34	50.00	-35.66	Average
12	5.139	10.05	11.62	21.67	60.00	-38.33	QP

Test mode2
AC 120V/60 Hz, Line

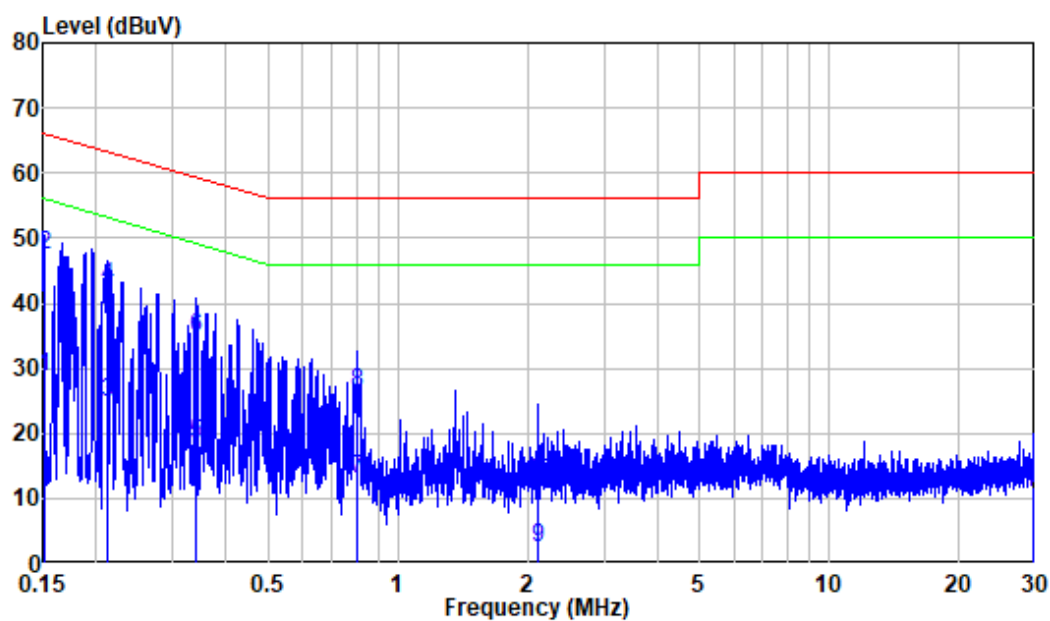

Site : Shielding Room
 Condition: Line
 Mode : Charging by Adapter+Transmitting
 Model : DX01

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.151	9.90	18.91	28.81	55.94	-27.13	Average
2	0.151	9.90	37.62	47.52	65.94	-18.42	QP
3	0.213	9.80	15.07	24.87	53.09	-28.22	Average
4	0.213	9.80	32.83	42.63	63.09	-20.46	QP
5	0.341	9.80	8.77	18.57	49.17	-30.60	Average
6	0.341	9.80	24.90	34.70	59.17	-24.47	QP
7	0.801	9.81	3.30	13.11	46.00	-32.89	Average
8	0.801	9.81	16.38	26.19	56.00	-29.81	QP
9	2.105	9.92	-7.50	2.42	46.00	-43.58	Average
10	2.105	9.92	2.43	12.35	56.00	-43.65	QP
11	29.822	10.50	0.43	10.93	50.00	-39.07	Average
12	29.822	10.50	1.29	11.79	60.00	-48.21	QP

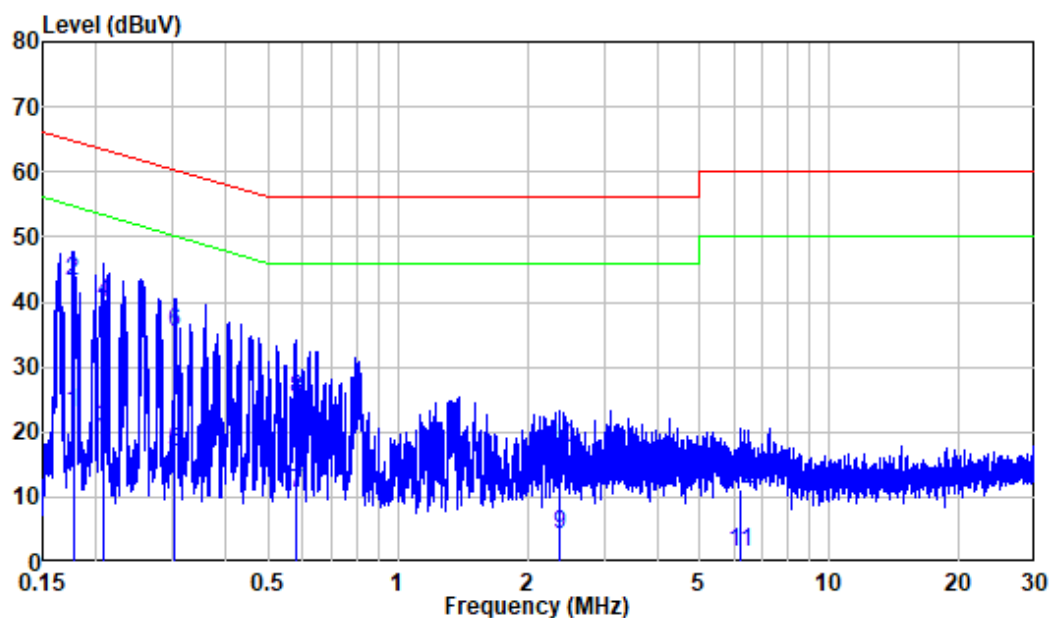AC 120V/60 Hz, Neutral

Site : Shielding Room
 Condition: Neutral
 Mode : Charging by Adapter+Transmitting
 Model : DX01

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.177	9.96	13.07	23.03	54.65	-31.62	Average
2	0.177	9.96	33.17	43.13	64.65	-21.52	QP
3	0.208	10.00	10.59	20.59	53.29	-32.70	Average
4	0.208	10.00	29.99	39.99	63.29	-23.30	QP
5	0.302	9.95	6.91	16.86	50.18	-33.32	Average
6	0.302	9.95	25.49	35.44	60.18	-24.74	QP
7	0.580	9.91	0.55	10.46	46.00	-35.54	Average
8	0.580	9.91	15.08	24.99	56.00	-31.01	QP
9	2.371	9.94	-5.61	4.33	46.00	-41.67	Average
10	2.371	9.94	7.52	17.46	56.00	-38.54	QP
11	6.223	10.06	-8.61	1.45	50.00	-48.55	Average
12	6.223	10.06	1.06	11.12	60.00	-48.88	QP


FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

EUT Setup

Below 1 GHz:

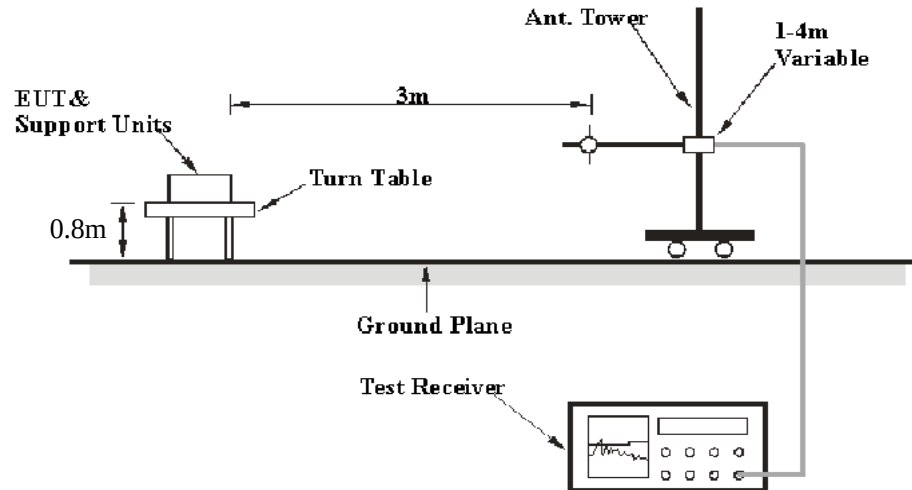

Above 1GHz:

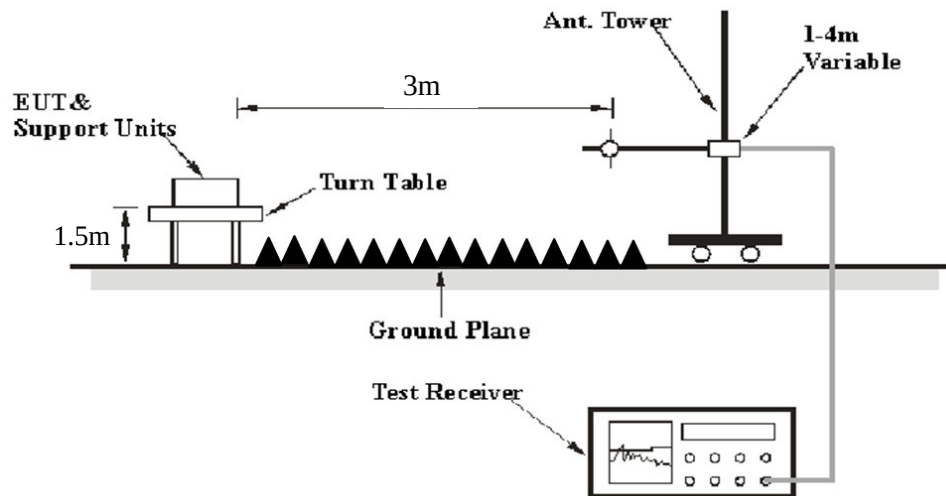

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for Over Limit/margin calculation is as follows:

$$\begin{aligned} \text{Over Limit} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	24-25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa


The testing was performed by Chao Mo on 2021-11-26.

EUT operation mode: Test mode 1& 2

(Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK mode at X axis, Y axis, Z axis, the worst case is GFSK Mode, Low channel at Z axis)


Below 1GHz:
Test mode1, Low Channel

Horizontal

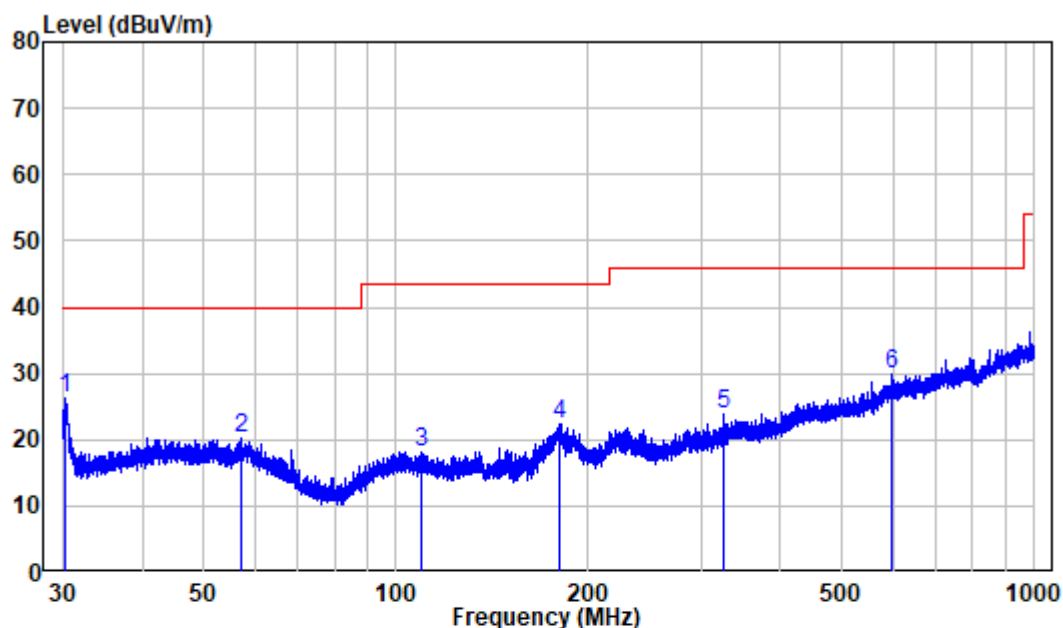

Site : chamber
Condition: 3m HORIZONTAL
Job No. : SZNS1211118-59480E-RF
Mode : Charging by Charging Box+Transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	30.33	-12.28	38.41	26.13	40.00	-13.87	Peak
2	57.32	-9.95	30.17	20.22	40.00	-19.78	Peak
3	109.22	-11.99	30.11	18.12	43.50	-25.38	Peak
4	180.02	-12.60	34.80	22.20	43.50	-21.30	Peak
5	326.45	-7.96	31.74	23.78	46.00	-22.22	Peak
6	599.58	-1.96	31.89	29.93	46.00	-16.07	Peak

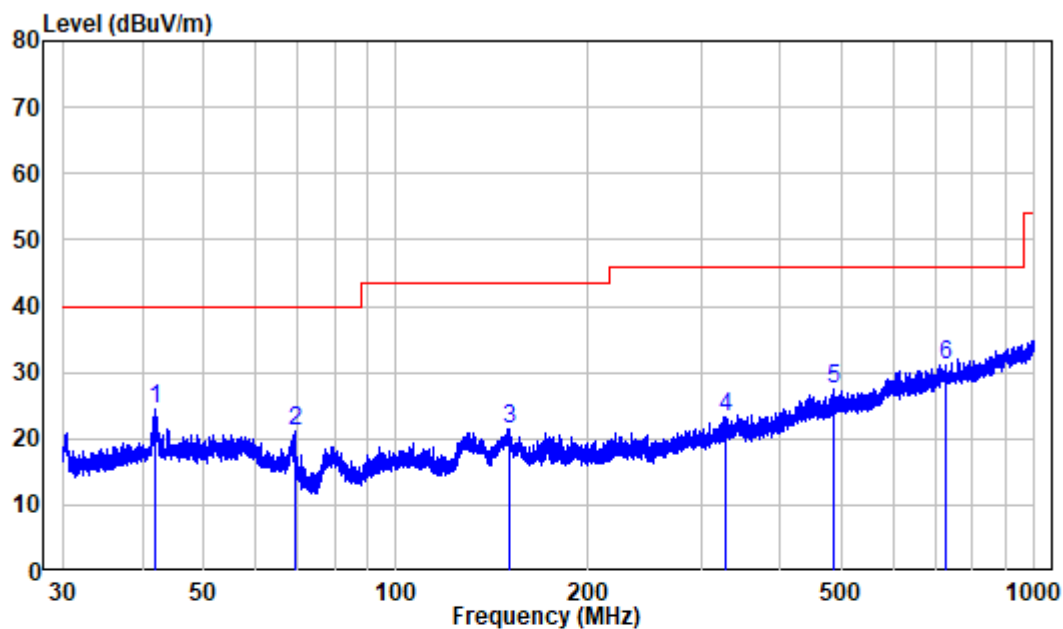Vertical


Site : chamber

Condition: 3m VERTICAL

Job No. : SZNS1211118-59480E-RF

Mode : Charging by Charging Box+Transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	42.04	-9.93	34.28	24.35	40.00	-15.65	Peak
2	69.30	-14.42	35.56	21.14	40.00	-18.86	Peak
3	150.27	-15.09	36.66	21.57	43.50	-21.93	Peak
4	328.17	-7.87	31.07	23.20	46.00	-22.80	Peak
5	484.76	-4.97	32.38	27.41	46.00	-18.59	Peak
6	727.44	-0.97	32.11	31.14	46.00	-14.86	Peak

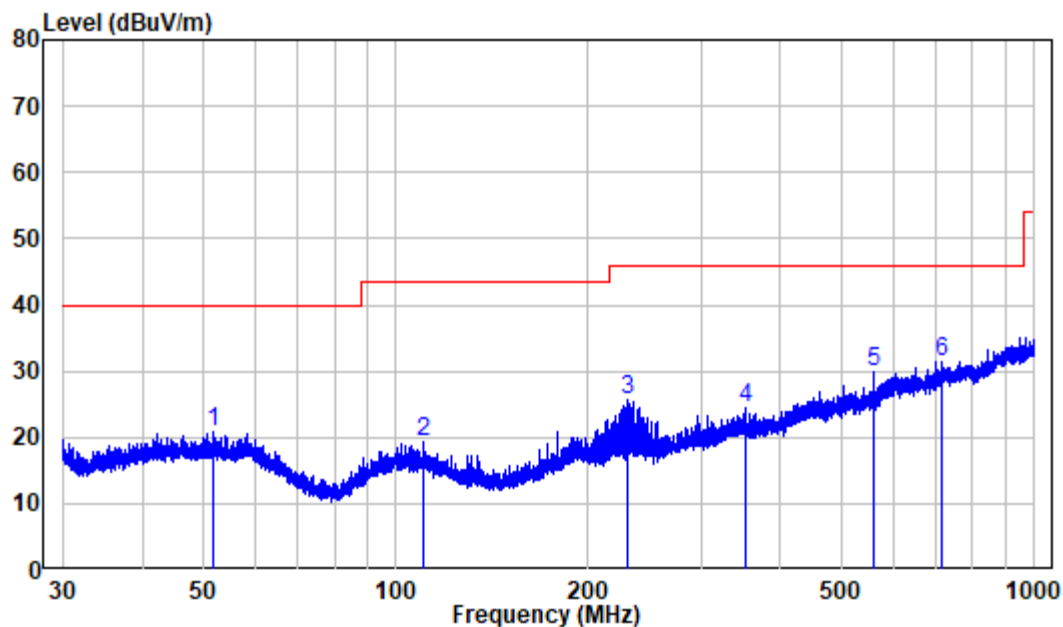Test mode2, Low Channel**Horizontal**


Site : chamber

Condition: 3m HORIZONTAL

Job No. : SZNS1211118-59480E-RF

Mode : Charging by Adapter+Transmitting

	Freq	Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	51.84	-9.90	30.70	20.80	40.00	-19.20	Peak
2	110.04	-11.98	31.43	19.45	43.50	-24.05	Peak
3	231.01	-11.19	36.93	25.74	46.00	-20.26	Peak
4	353.10	-7.42	31.84	24.42	46.00	-21.58	Peak
5	561.68	-3.97	33.94	29.97	46.00	-16.03	Peak
6	717.63	-1.27	32.71	31.44	46.00	-14.56	Peak

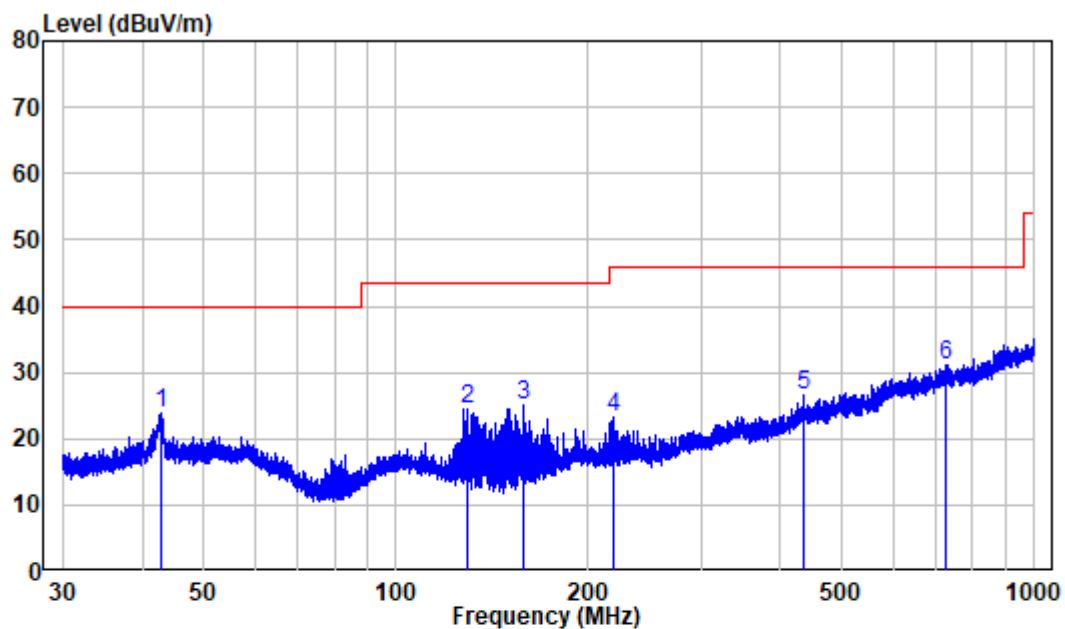Vertical

Site : chamber

Condition: 3m VERTICAL

Job No. : SZNS1211118-59480E-RF

Mode : Charging by Adapter+Transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	42.88	-9.89	33.70	23.81	40.00	-16.19	Peak
2	129.41	-14.74	39.32	24.58	43.50	-18.92	Peak
3	158.46	-14.29	39.20	24.91	43.50	-18.59	Peak
4	219.75	-11.45	34.80	23.35	46.00	-22.65	Peak
5	435.21	-5.36	31.95	26.59	46.00	-19.41	Peak
6	725.21	-1.14	32.38	31.24	46.00	-14.76	Peak

Above 1GHz, Test mode2 (worst case):

Frequency (MHz)	Receiver		Turntable Angle	Rx Antenna		Factor (dB/m)	Absolute Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/AV	Degree	Height	Polar				
				(m)	(H/V)				
DH1 Low Channel									
2310	48.82	PK	325	1.5	H	-7.23	41.59	74	-32.41
2310	48.09	PK	169	2.0	V	-7.23	40.86	74	-33.14
2390	57.63	PK	223	1.1	H	-7.21	50.42	74	-23.58
2390	56.82	PK	142	2.2	V	-7.21	49.61	74	-24.39
4804	46.24	PK	148	2.1	H	-3.52	42.72	74	-31.28
4804	46.44	PK	300	2.1	V	-3.52	42.92	74	-31.08
DH1 Middle Channel									
4882	43.53	PK	130	1.2	H	-3.37	40.16	74	-33.84
4882	43.9	PK	267	1.2	V	-3.37	40.53	74	-33.47
DH1 High Channel									
2483.5	61.11	PK	35	1.9	H	-7.2	53.91	74	-20.09
2483.5	55.63	PK	295	2.2	V	-7.2	48.43	74	-25.57
2500	48.43	PK	205	1.8	H	-7.18	41.25	74	-32.75
2500	48.22	PK	350	1.7	V	-7.18	41.04	74	-32.96
4960	43.43	PK	317	1.4	H	-3.01	40.42	74	-33.58
4960	44.73	PK	115	1.2	V	-3.01	41.72	74	-32.28

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Absolute Level (Corrected Amplitude) = Factor + Reading

Margin = Absolute Level - Limit


The other spurious emission which is in the noise floor level was not recorded.

The test result of peak was less than the limit of average, so just peak value were recorded.


1 GHz - 18 GHz: (Pre-Scan plots)



Low Channel

Horizontal

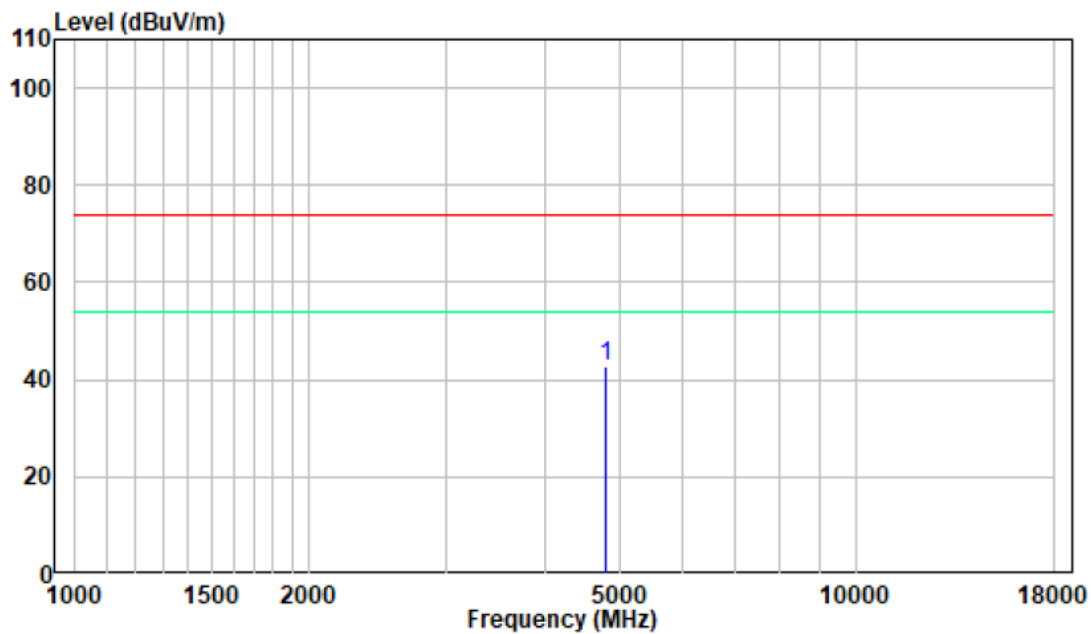

Vertical

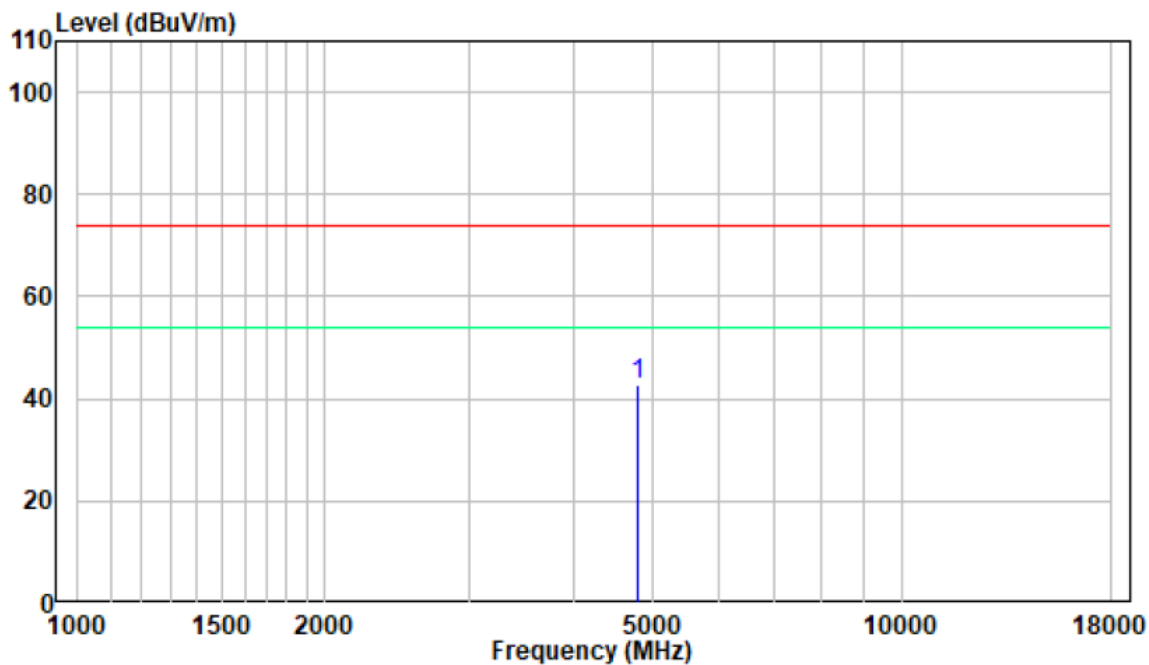

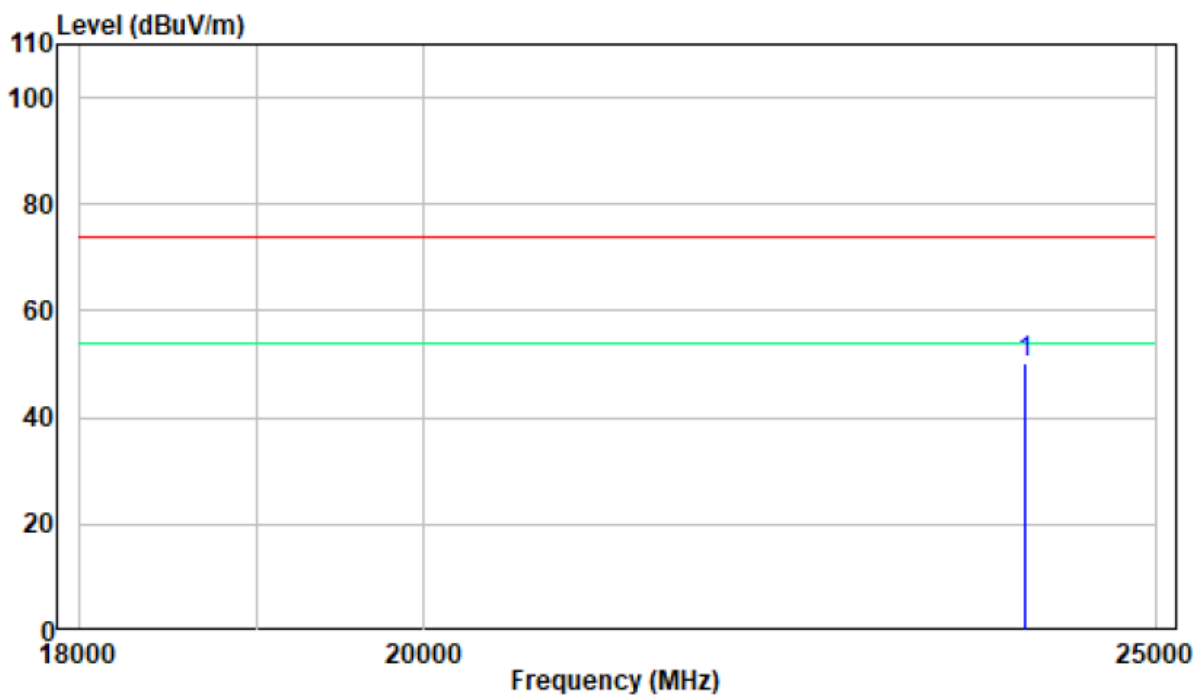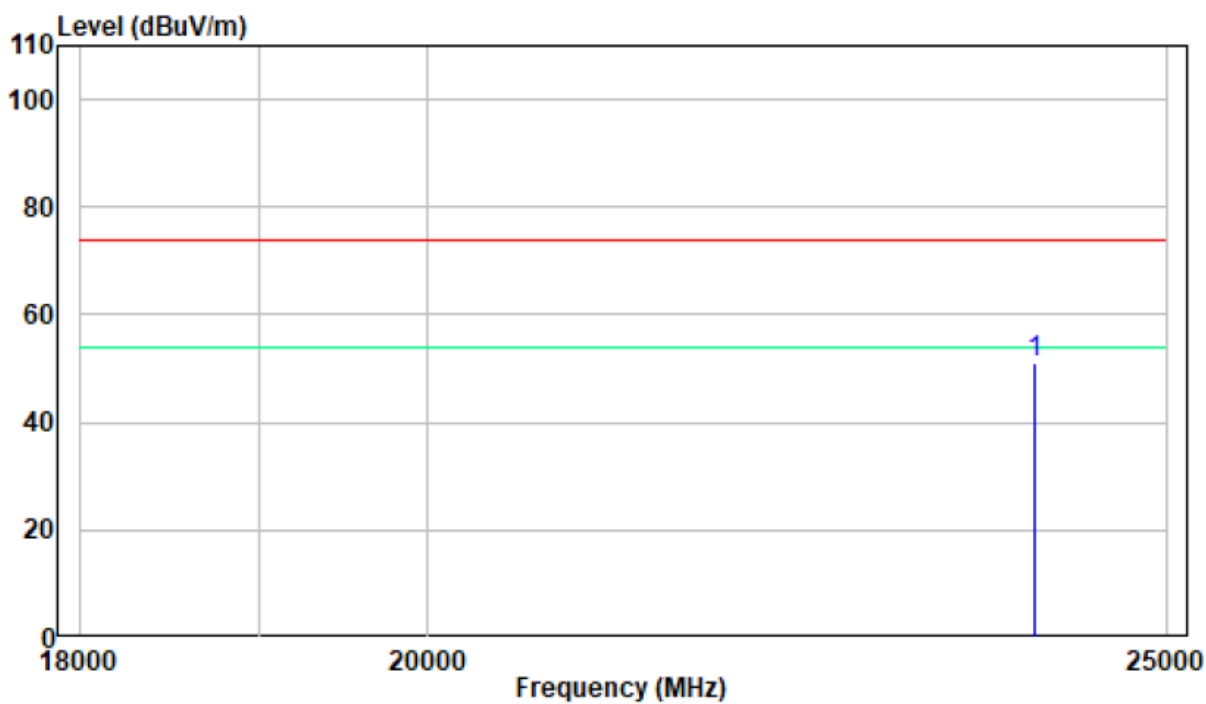18-25GHz: (Pre-Scan plots)**Low Channel****Horizontal****Vertical**

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	50 %
ATM Pressure:	101.1 kPa

The testing was performed by Paul Liu from 2021-11-26 to 2021-11-29


EUT operation mode: Transmitting

Test Result: Compliant.

Test Mode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH1	Ant1	Hop	1.003	≥ 0.694	PASS
2DH1	Ant1	Hop	1	≥ 0.890	PASS
3DH1	Ant1	Hop	1	≥ 0.860	PASS


Please refer to the below plots:

DH1_Ant1_Hop

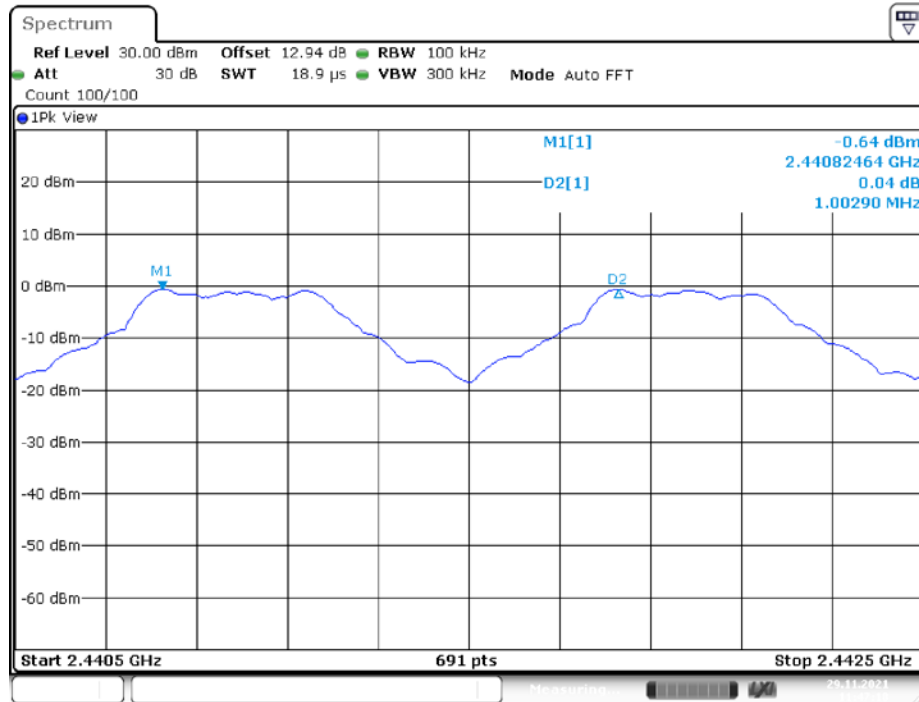


Date: 29.NOV.2021 11:47:18

2DH1_Ant1_Hop

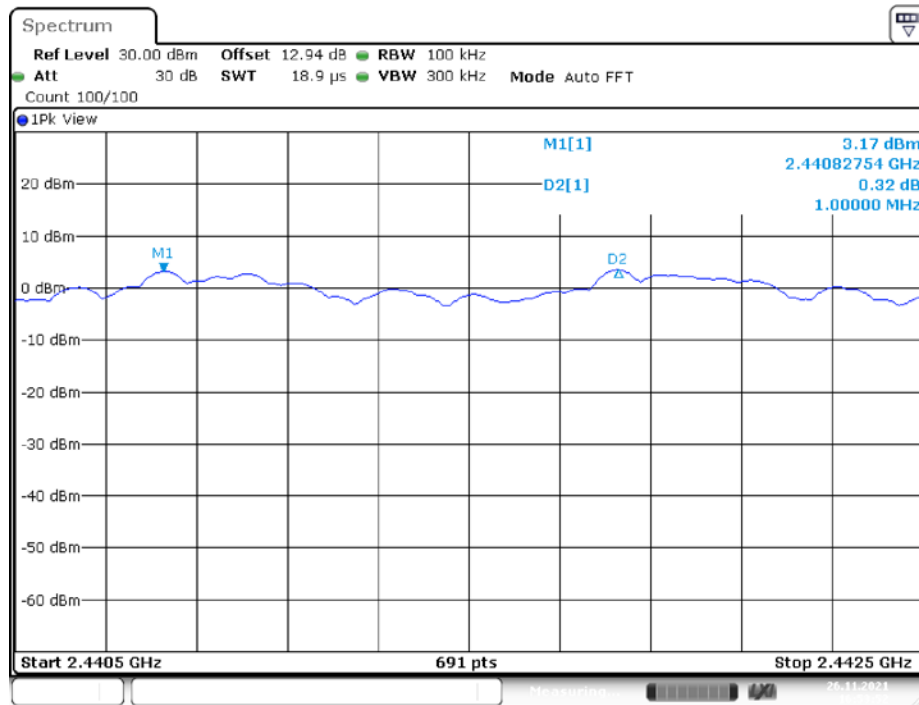

Date: 26.NOV.2021 16:53:52

3DH1_Ant1_Hop

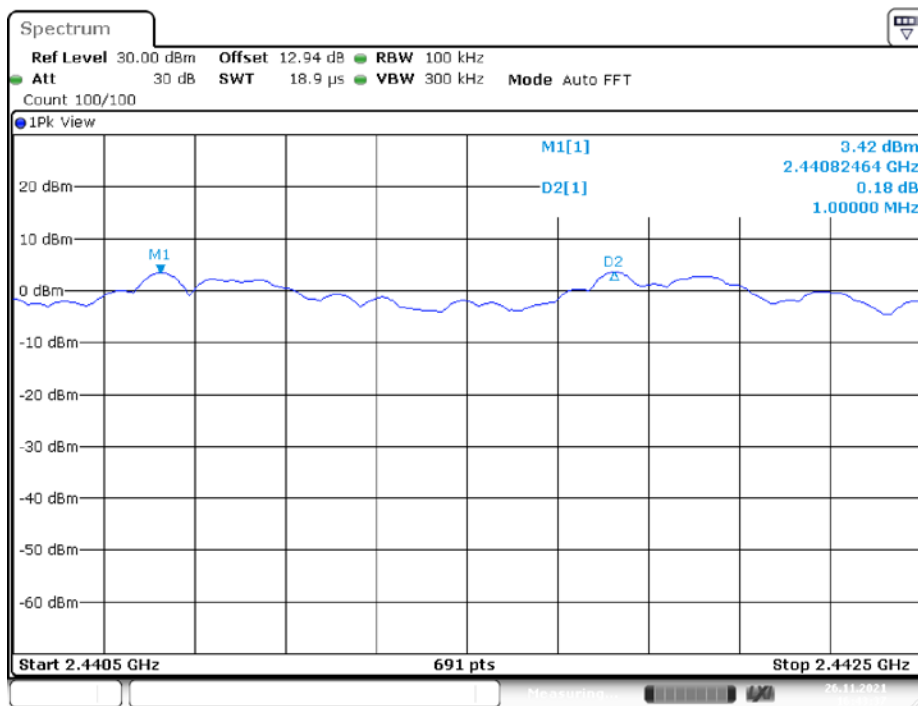

Date: 26.NOV.2021 16:43:37

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Test Procedure

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).



Test Data**Environmental Conditions**

Temperature:	24 °C
Relative Humidity:	50 %
ATM Pressure:	101.1 kPa

The testing was performed by Paul Liu from 2021-11-26 to 2021-11-29


EUT operation mode: Transmitting

Test Result: Compliant.


Test Mode	Antenna	Channel	20db EBW[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	1.038	---	PASS
		2441	1.041	---	PASS
		2480	1.035	---	PASS
2DH1	Ant1	2402	1.338	---	PASS
		2441	1.335	---	PASS
		2480	1.332	---	PASS
3DH1	Ant1	2402	1.284	---	PASS
		2441	1.290	---	PASS
		2480	1.290	---	PASS

Test Mode	Antenna	Channel	99% Occupied Bandwidth [MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.911	---	PASS
		2441	0.92	---	PASS
		2480	0.899	---	PASS
2DH1	Ant1	2402	1.205	---	PASS
		2441	1.22	---	PASS
		2480	1.229	---	PASS
3DH1	Ant1	2402	1.184	---	PASS
		2441	1.193	---	PASS
		2480	1.193	---	PASS

Please refer to the below plots:

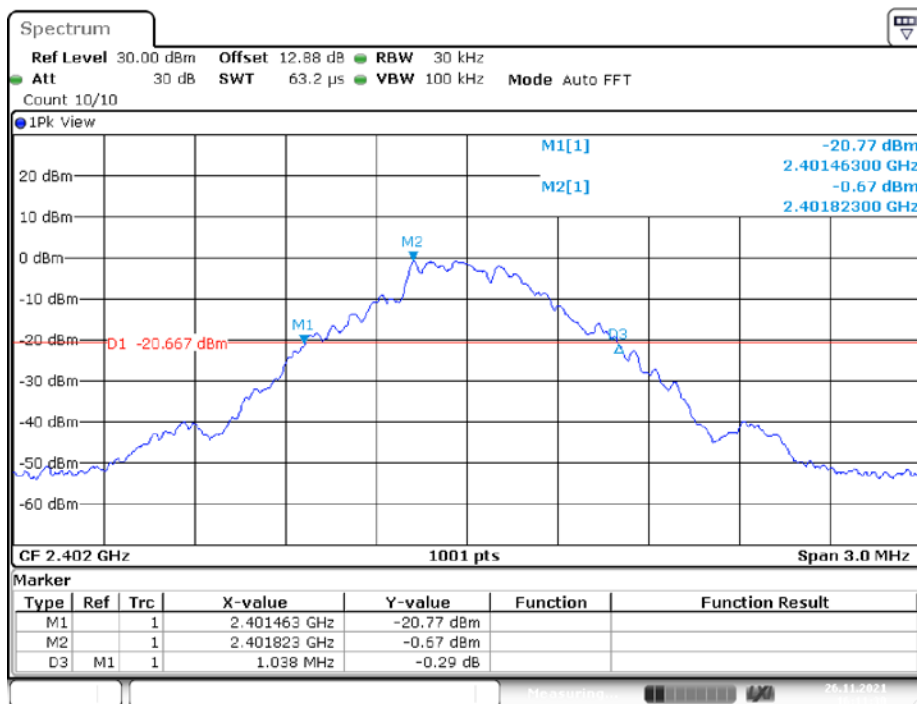
20 dB EMISSION BANDWIDTH**DH1_Ant1_2402MHz**

Date: 26.NOV.2021 16:11:29

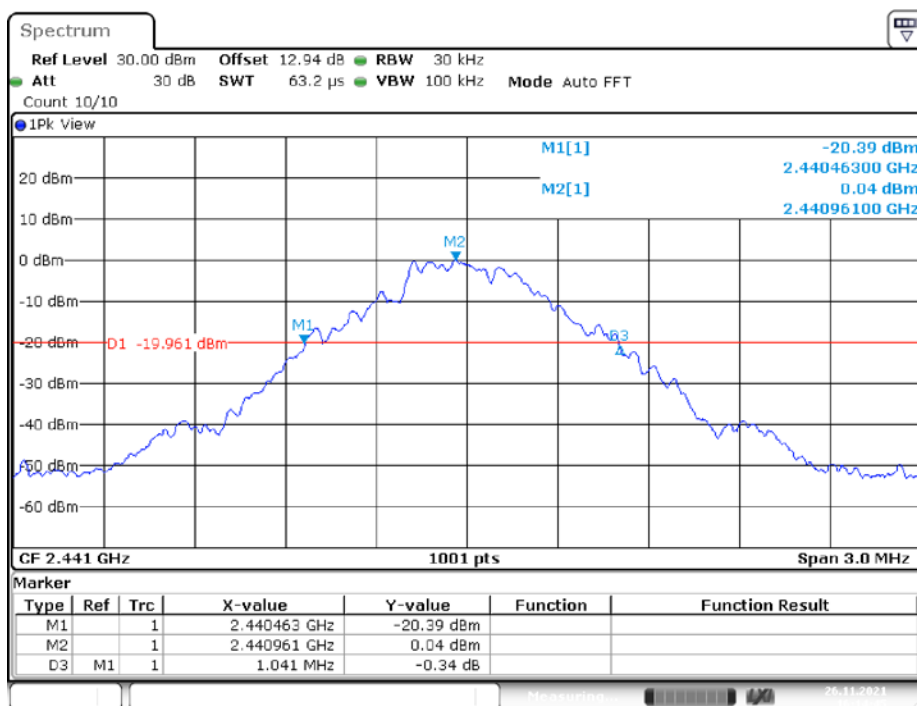DH1_Ant1_2441MHz


Date: 26.NOV.2021 16:14:45

DH1_Ant1_2480MHz

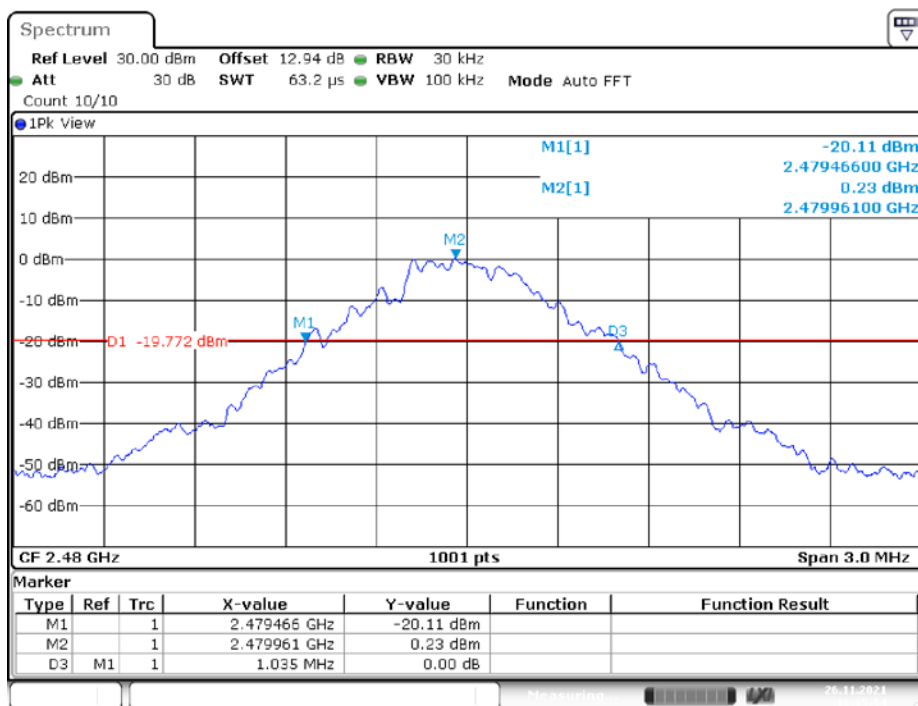


Date: 26.NOV.2021 16:15:54

2DH1_Ant1_2402MHz

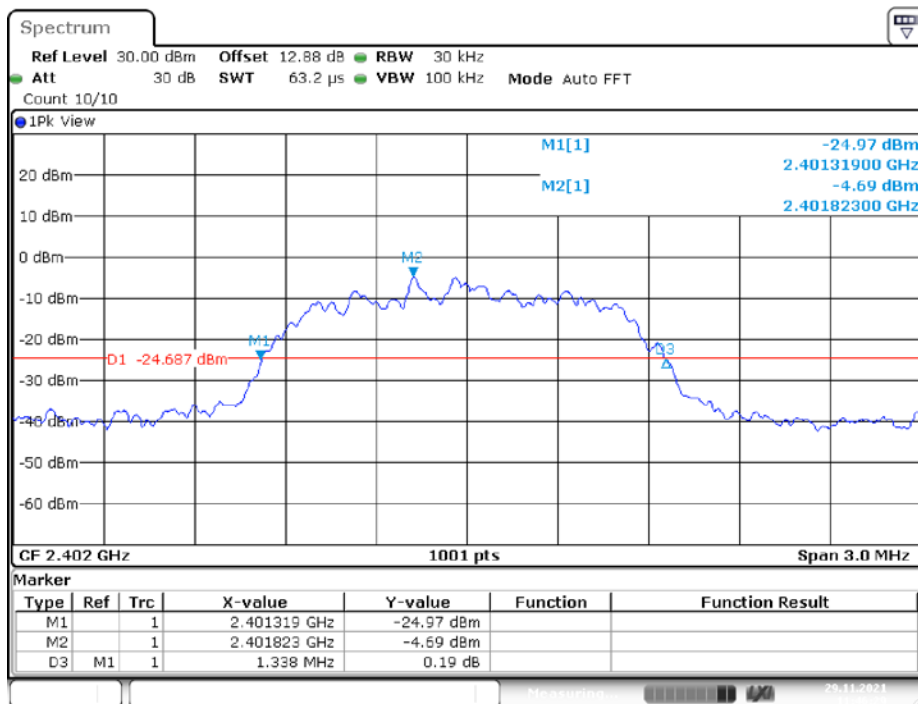


Date: 29.NOV.2021 11:46:30

2DH1_Ant1_2441MHz

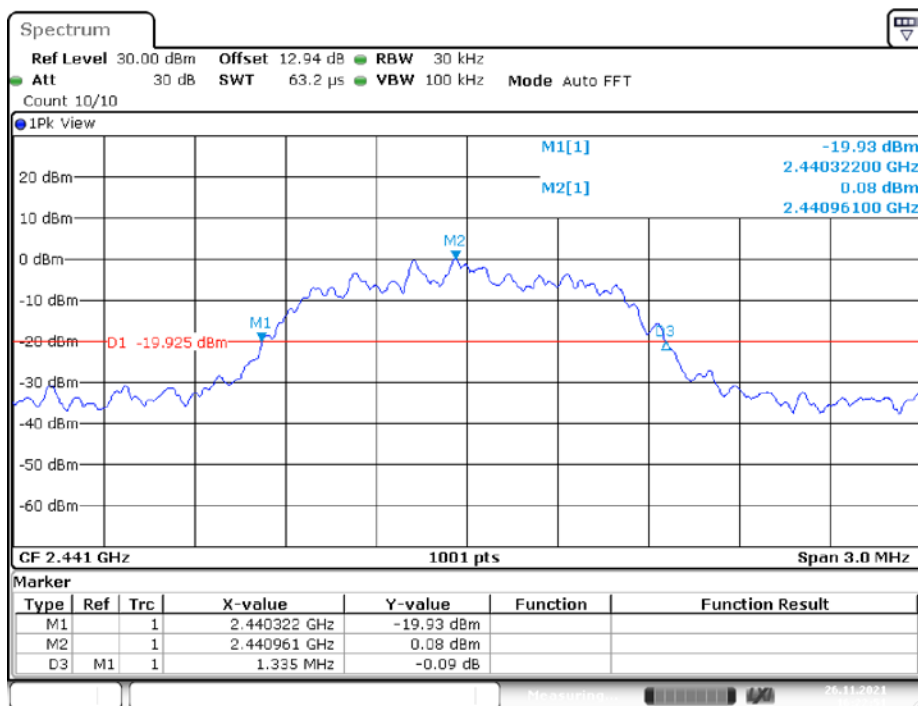


Date: 26.NOV.2021 16:22:50

2DH1_Ant1_2480MHz

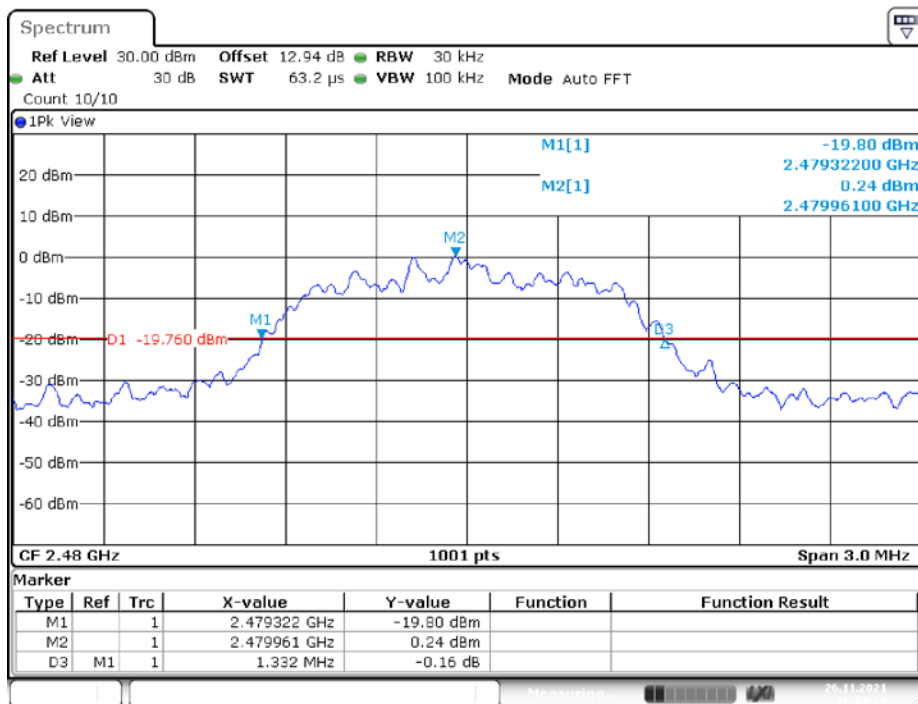


Date: 26.NOV.2021 16:24:09

3DH1_Ant1_2402MHz

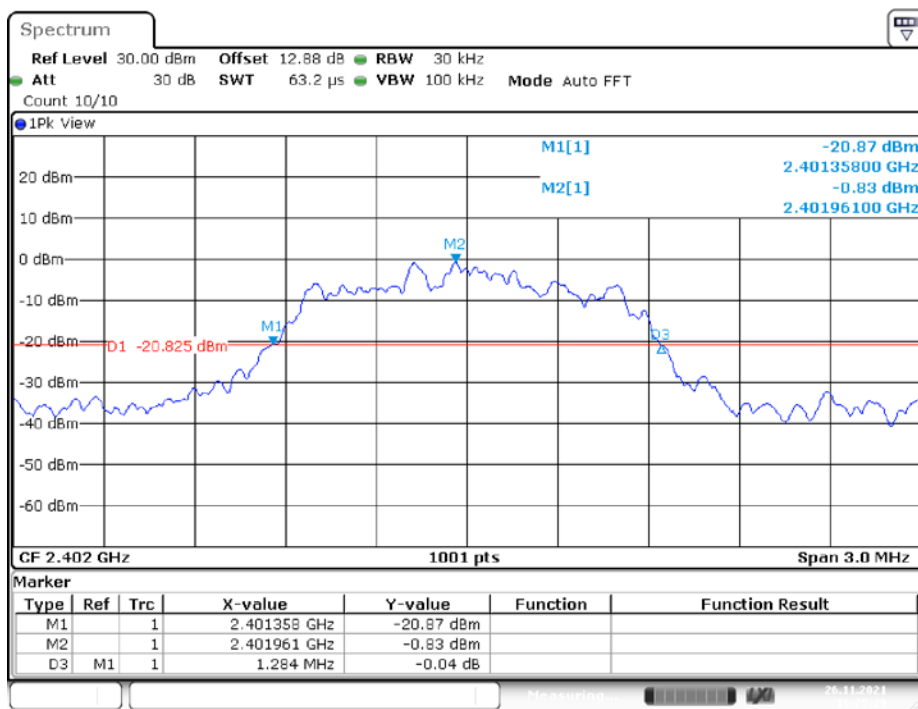


Date: 26.NOV.2021 16:25:29


3DH1_Ant1_2441MHz

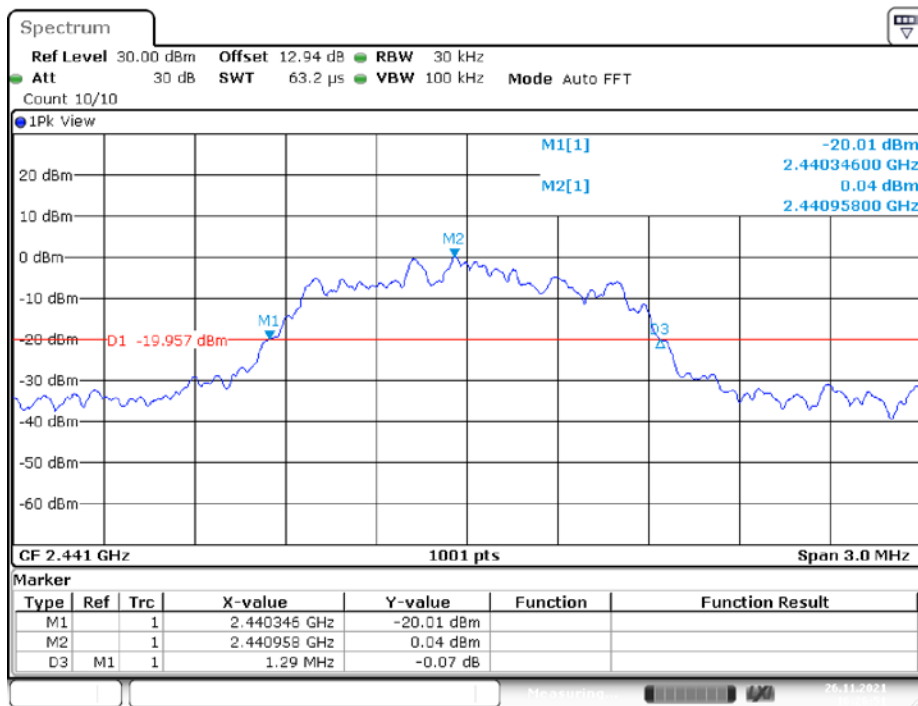


Date: 26.NOV.2021 16:26:51

3DH1_Ant1_2480MHz

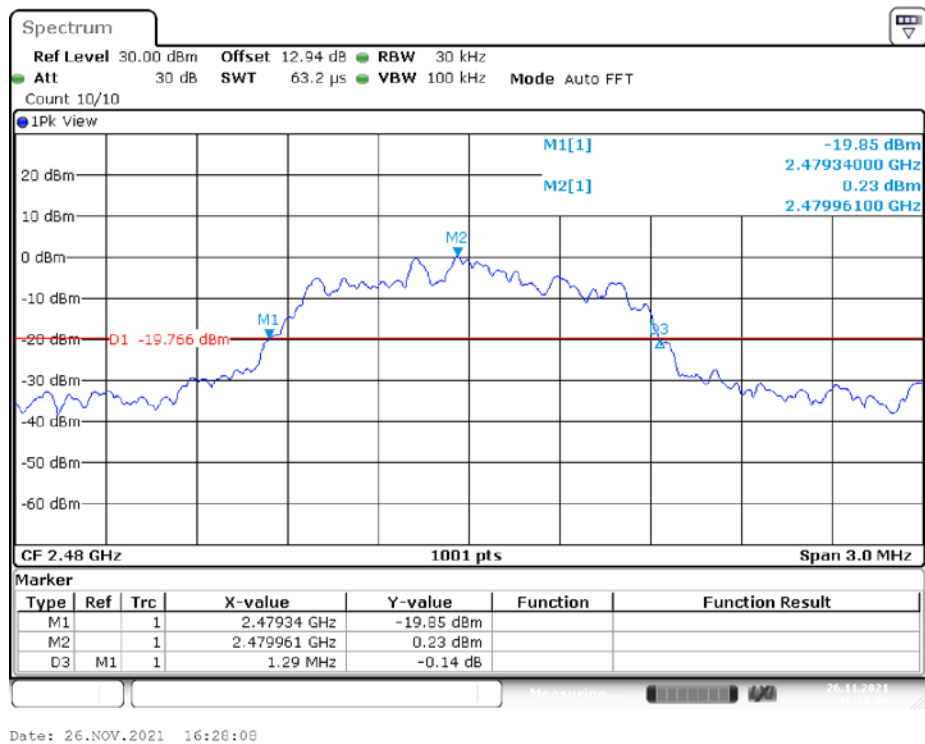

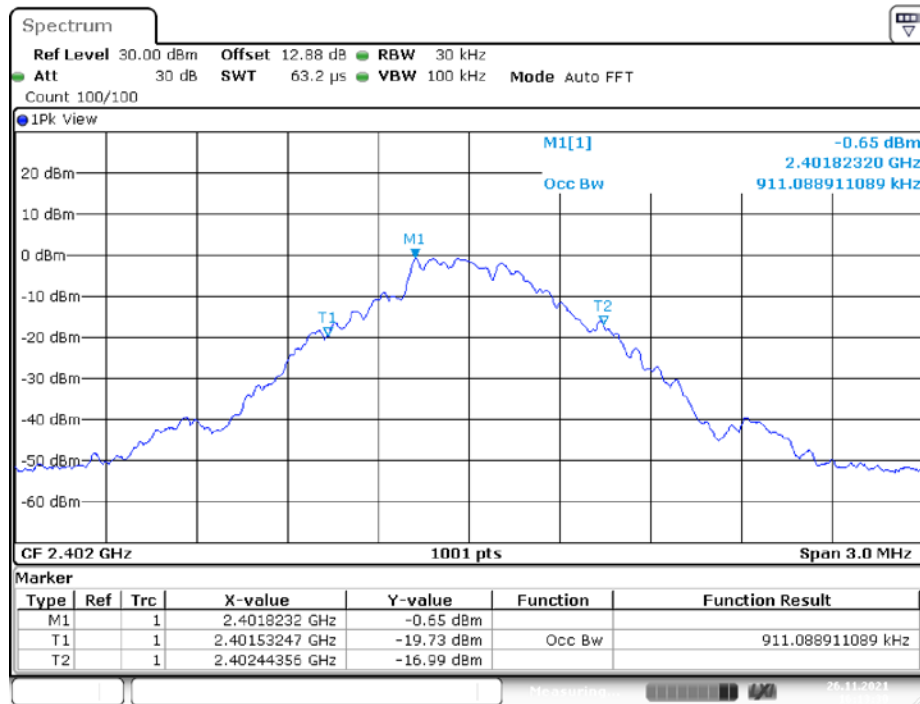
99% OCCUPIED BANDWIDTH**DH1_Ant1_2402MHz**

Date: 26.NOV.2021 16:13:30

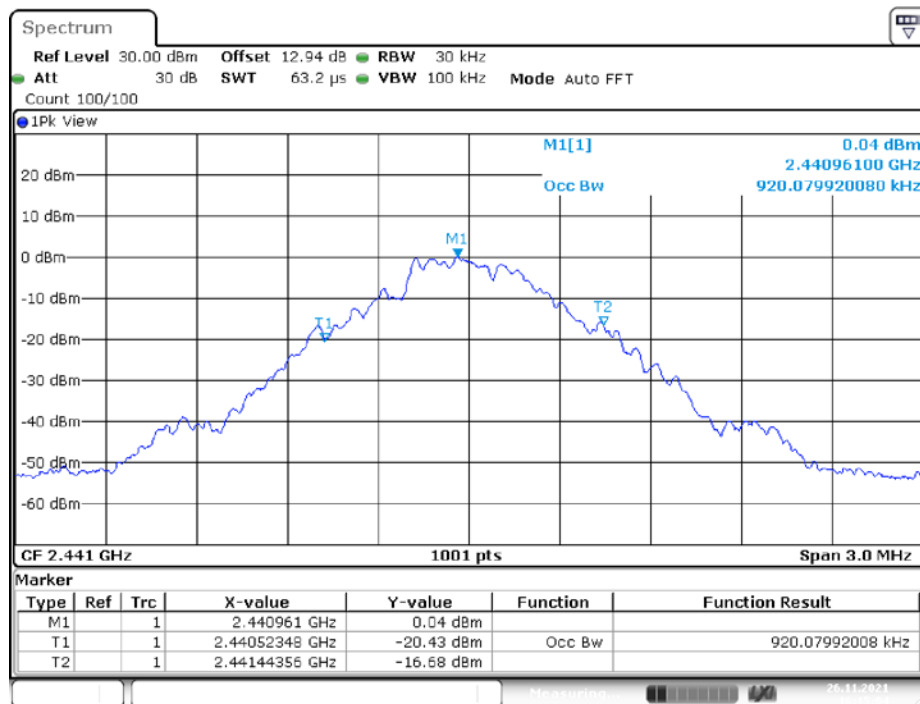DH1_Ant1_2441MHz


Date: 26.NOV.2021 16:15:04

DH1_Ant1_2480MHz

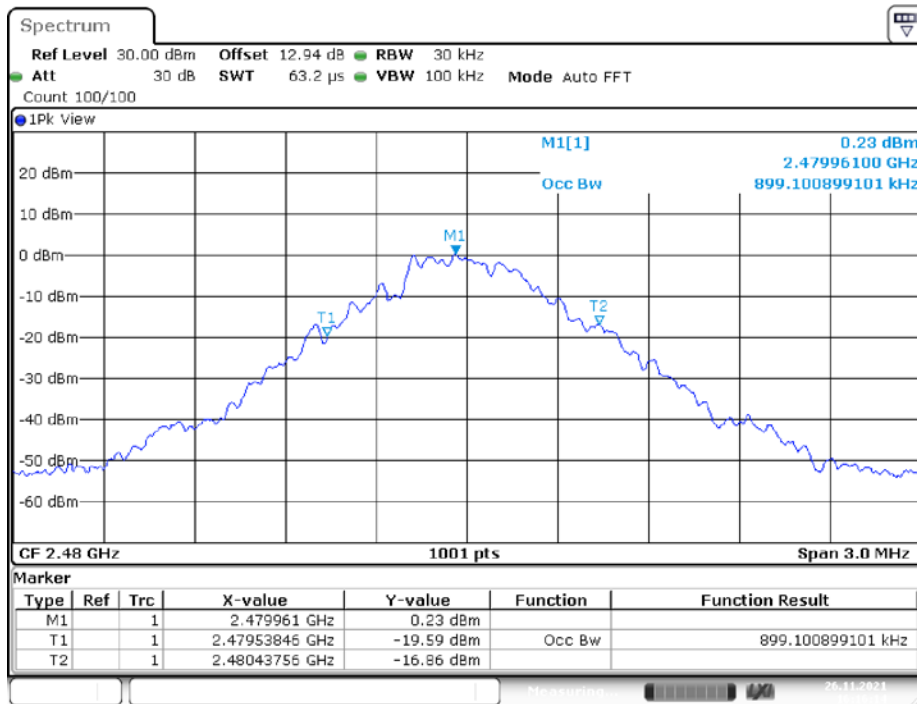


Date: 26.NOV.2021 16:16:14

2DH1_Ant1_2402MHz

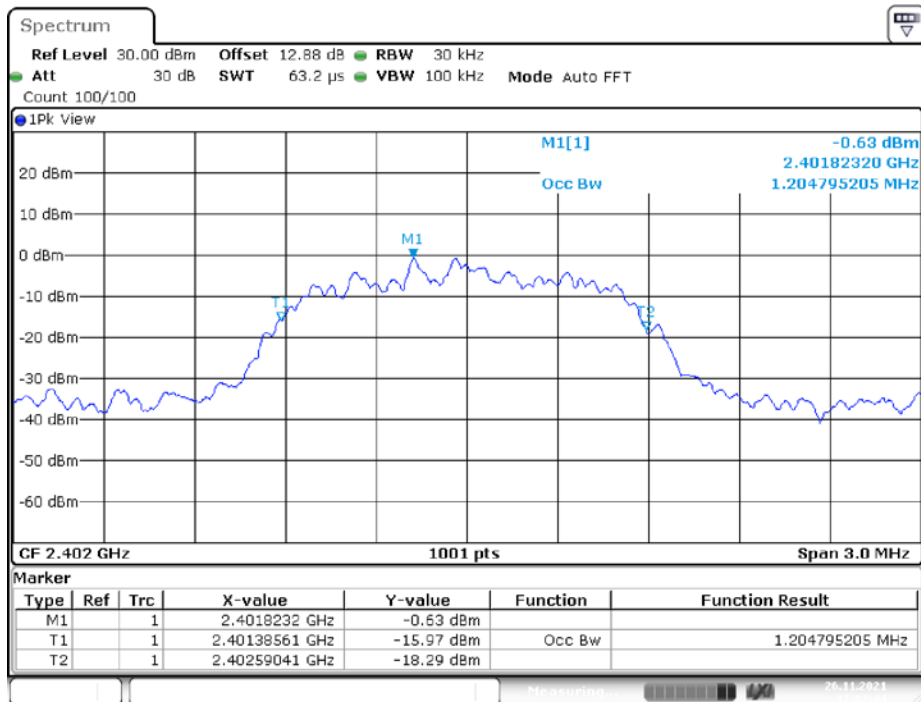


Date: 26.NOV.2021 17:02:43

2DH1_Ant1_2441MHz

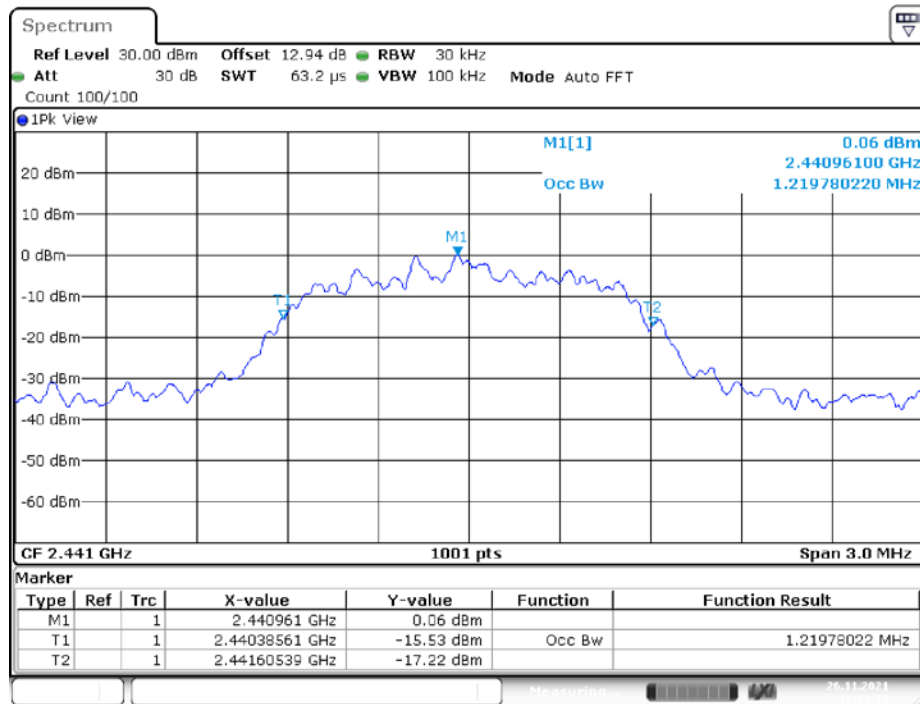


Date: 26.NOV.2021 16:23:10

2DH1_Ant1_2480MHz

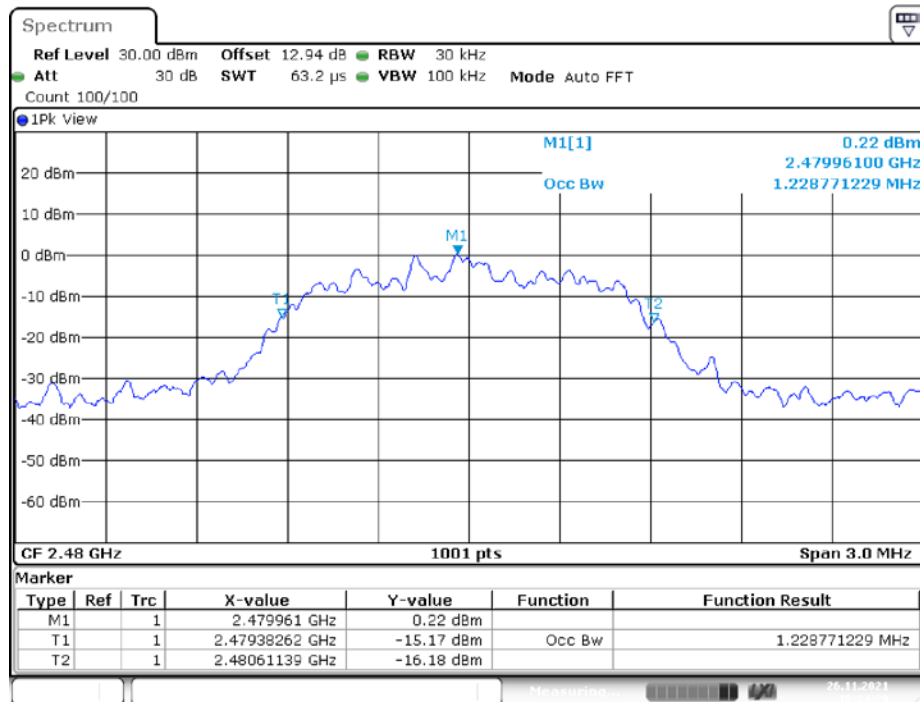


Date: 26.NOV.2021 16:24:29

3DH1_Ant1_2402MHz

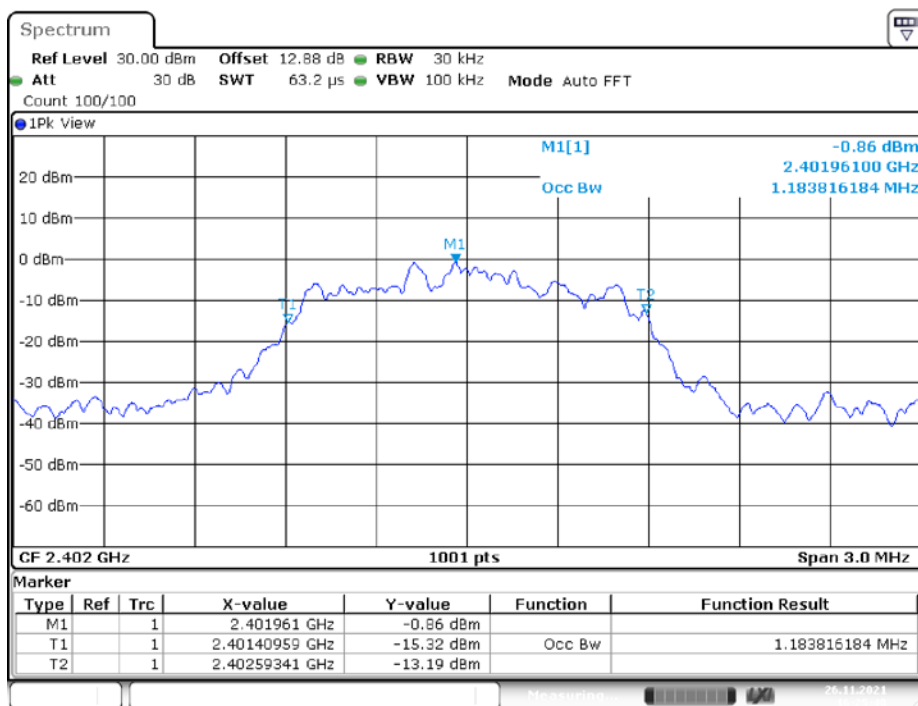


Date: 26.NOV.2021 16:25:48

3DH1_Ant1_2441MHz

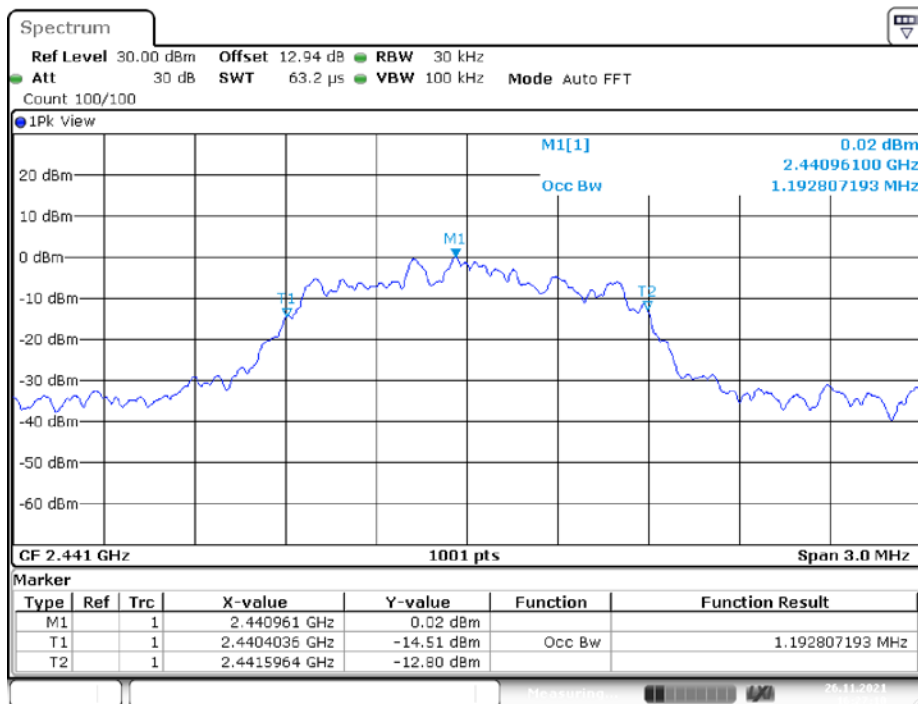

Date: 26.NOV.2021 16:27:10

3DH1_Ant1_2480MHz

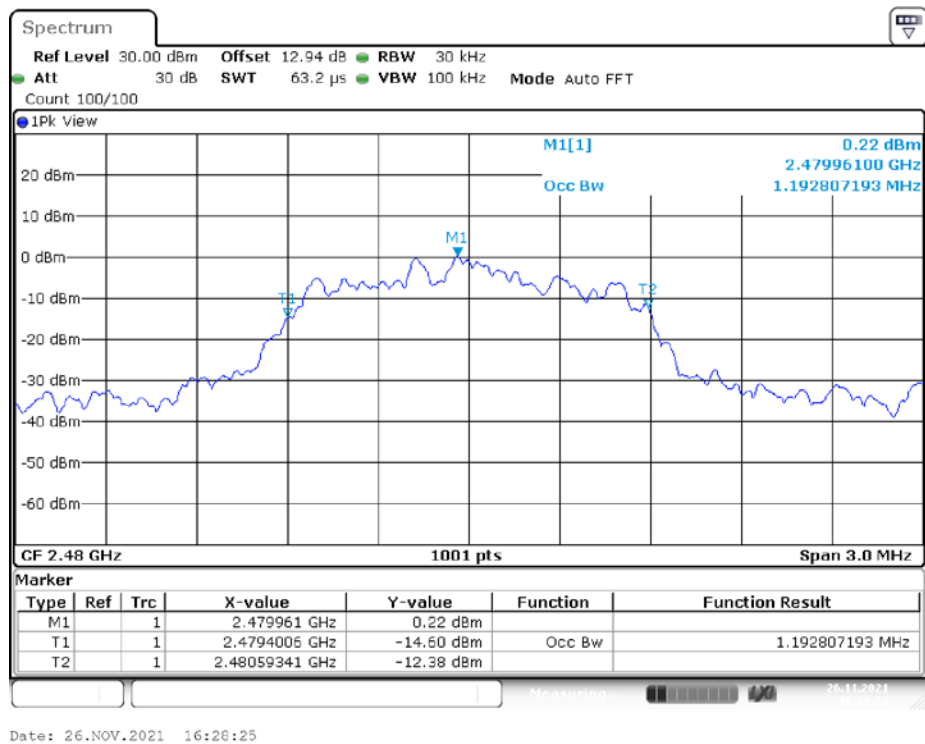

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data**Environmental Conditions**

Temperature:	23 °C
Relative Humidity:	51 %
ATM Pressure:	101.1 kPa


The testing was performed by Paul Liu on 2021-11-26.

EUT operation mode: Transmitting

Test Result: Compliant.


TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH1	Ant1	Hop	79	>=15	PASS
2DH1	Ant1	Hop	79	>=15	PASS
3DH1	Ant1	Hop	79	>=15	PASS

DH1_Ant1_Hop

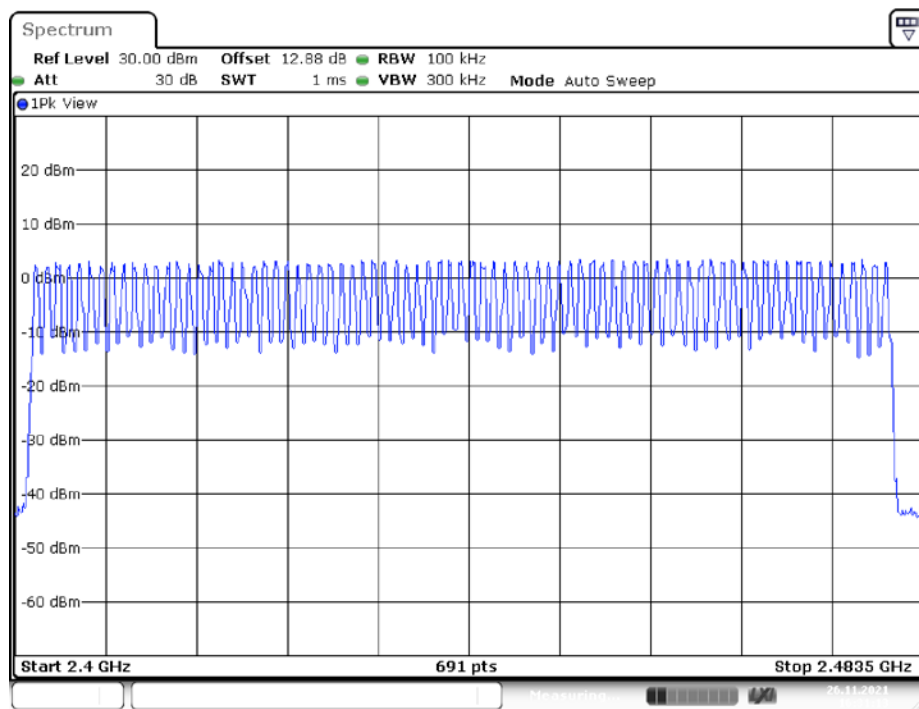


Date: 26.NOV.2021 16:31:13

2DH1_Ant1_Hop

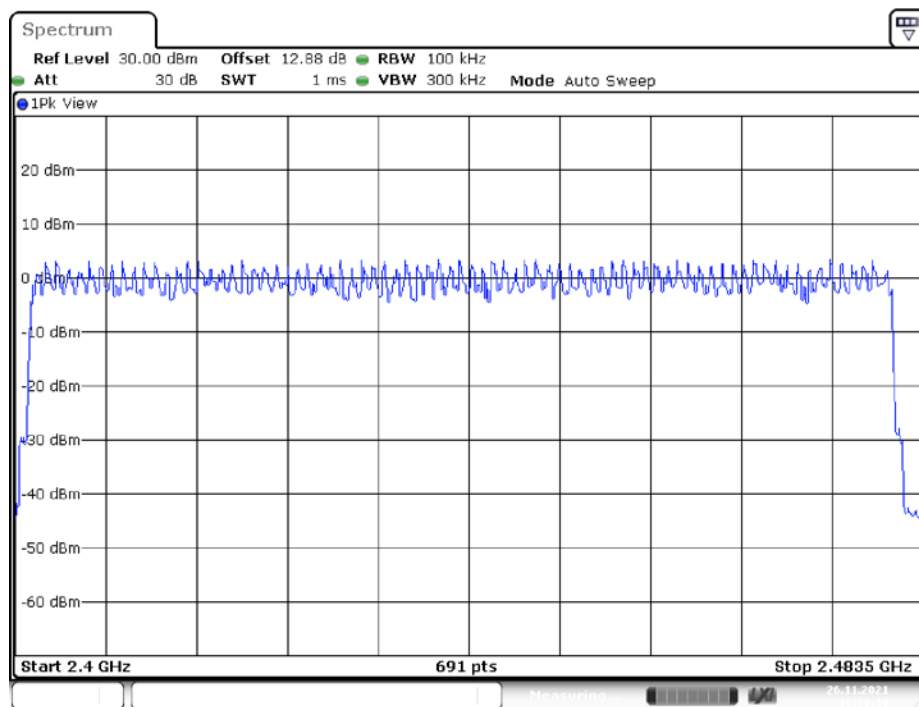

Date: 26.NOV.2021 16:36:30

3DH1_Ant1_Hop

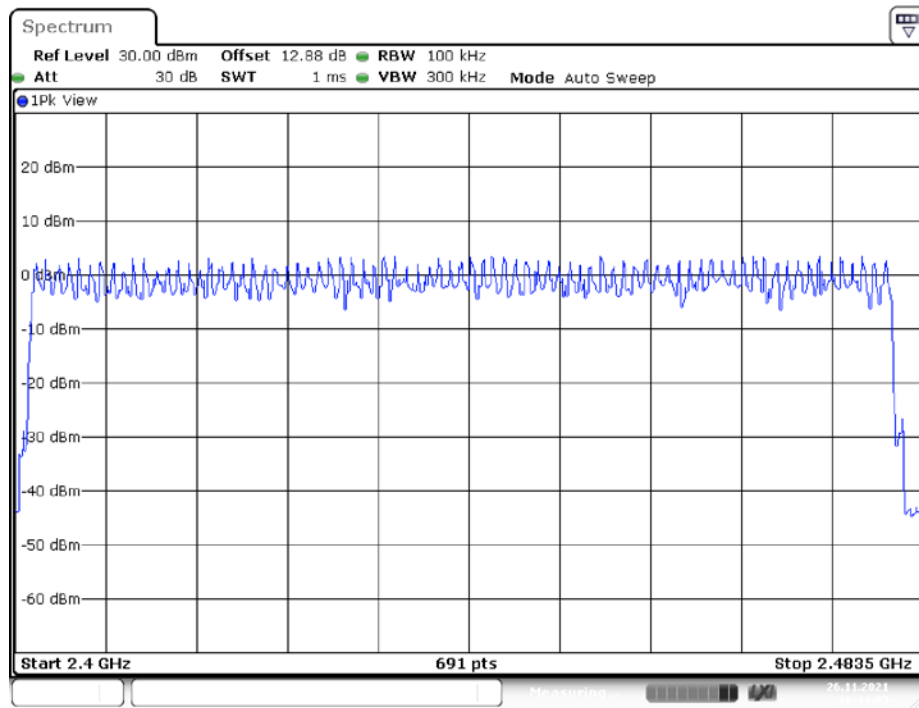

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

Test Data

Environmental Conditions

Temperature:	24 °C
Relative Humidity:	50 %
ATM Pressure:	101.1 kPa

The testing was performed by Paul Liu from 2021-11-26 to 2021-11-29

EUT operation mode: Transmitting

Test Result: Compliant.


Test Mode	Antenna	Channel	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.37	280	0.104	≤ 0.4	PASS
DH3	Ant1	Hop	1.62	140	0.226	≤ 0.4	PASS
DH5	Ant1	Hop	2.86	100	0.286	≤ 0.4	PASS
2DH1	Ant1	Hop	0.38	280	0.106	≤ 0.4	PASS
2DH3	Ant1	Hop	1.62	140	0.226	≤ 0.4	PASS
2DH5	Ant1	Hop	2.86	100	0.286	≤ 0.4	PASS
3DH1	Ant1	Hop	0.38	280	0.106	≤ 0.4	PASS
3DH3	Ant1	Hop	1.62	140	0.226	≤ 0.4	PASS
3DH5	Ant1	Hop	2.86	100	0.286	≤ 0.4	PASS

Note 1: A period time=0.4*79=31.6(S), Result=Burst Width*Total Hops


Note 2: Total Hops =Hopping Number in 3.16s*10

Note 3: Hopping Number in 3.16s=Total of highest signals in 3.16s (Second high signals were other channel)

DH1_Ant1_Hop

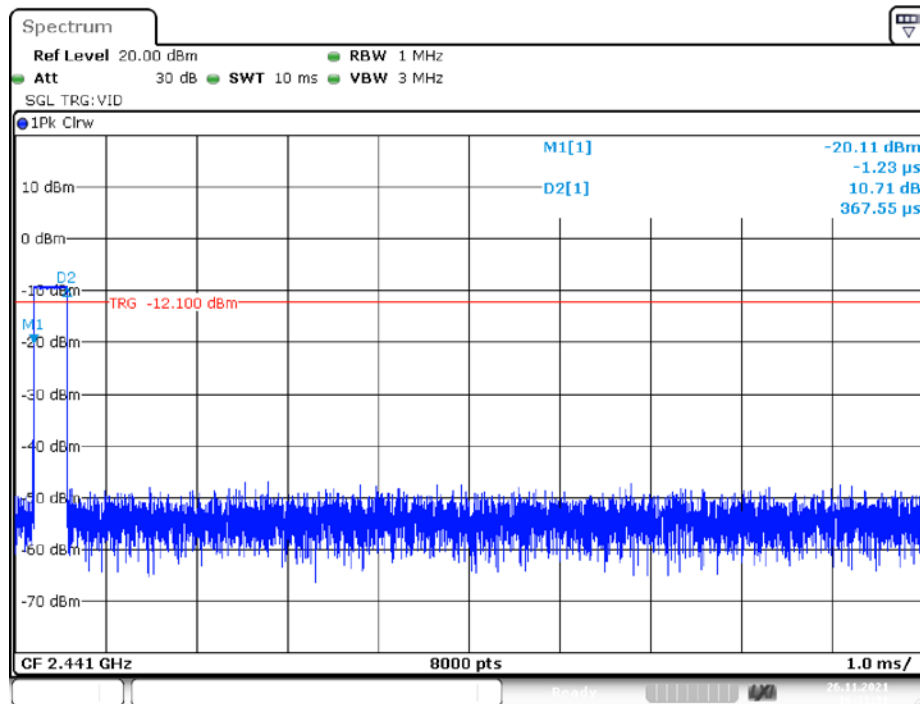


Date: 26.NOV.2021 16:31:31

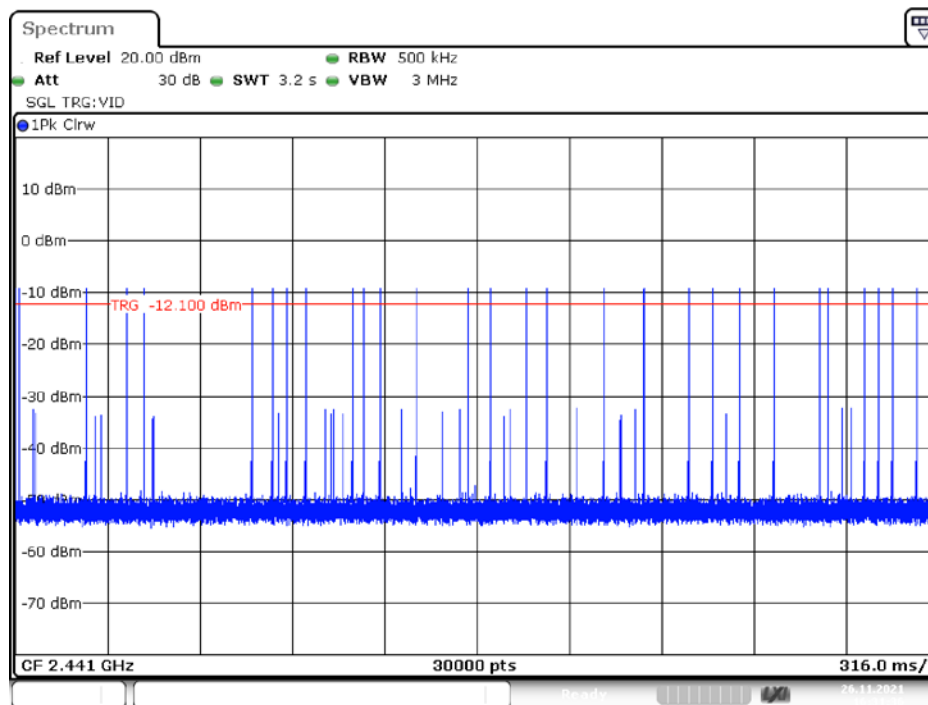


Date: 26.NOV.2021 16:31:36

DH3_Ant1_Hop

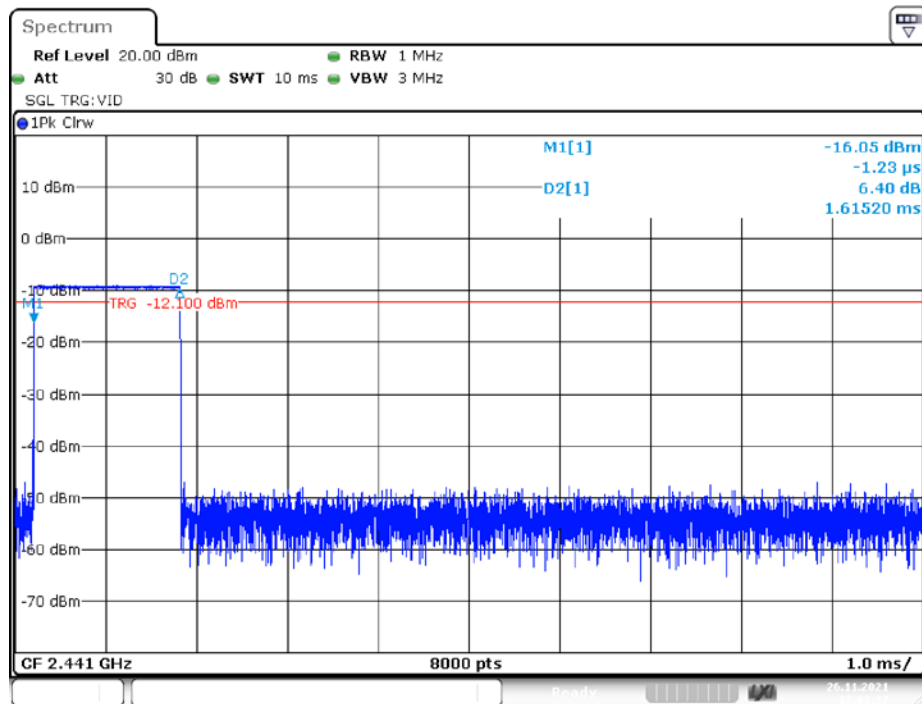


Date: 26.NOV.2021 17:03:37

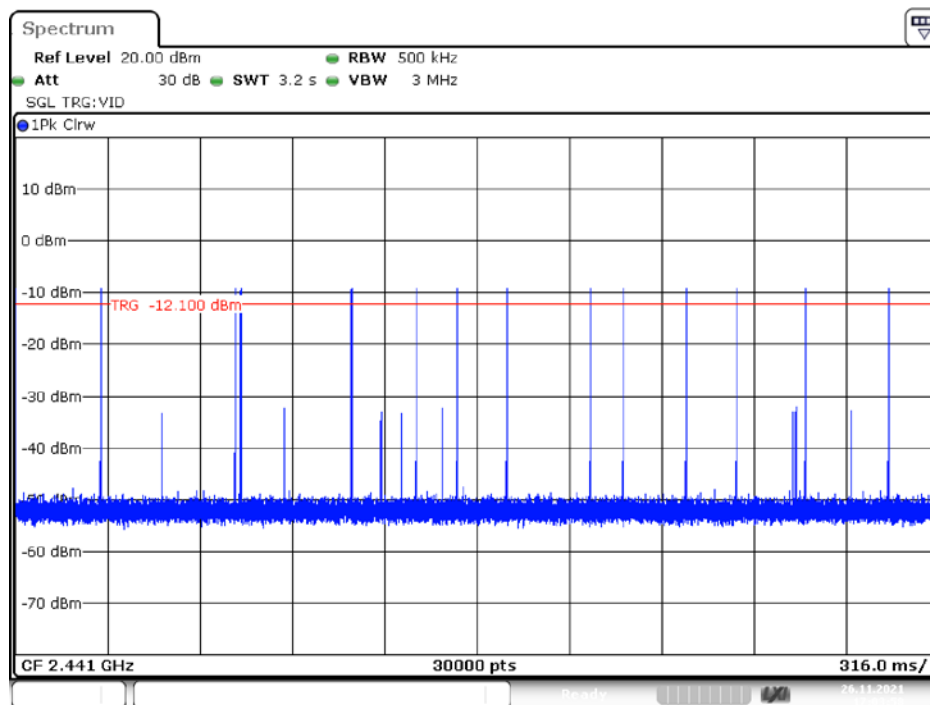


Date: 26.NOV.2021 17:03:58

DH5_Ant1_Hop

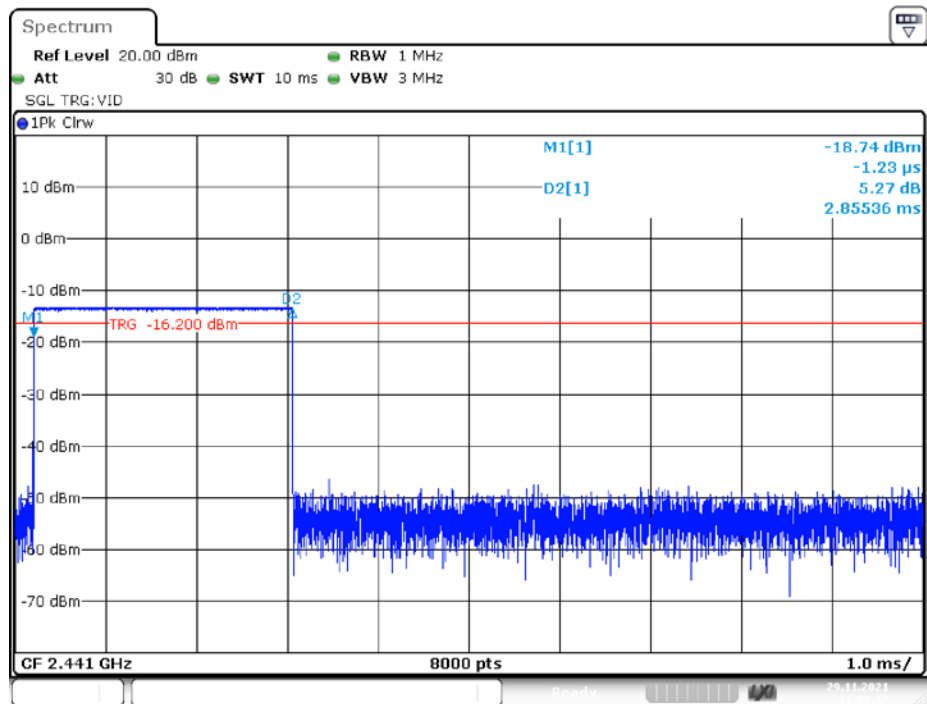


Date: 29.NOV.2021 11:50:38

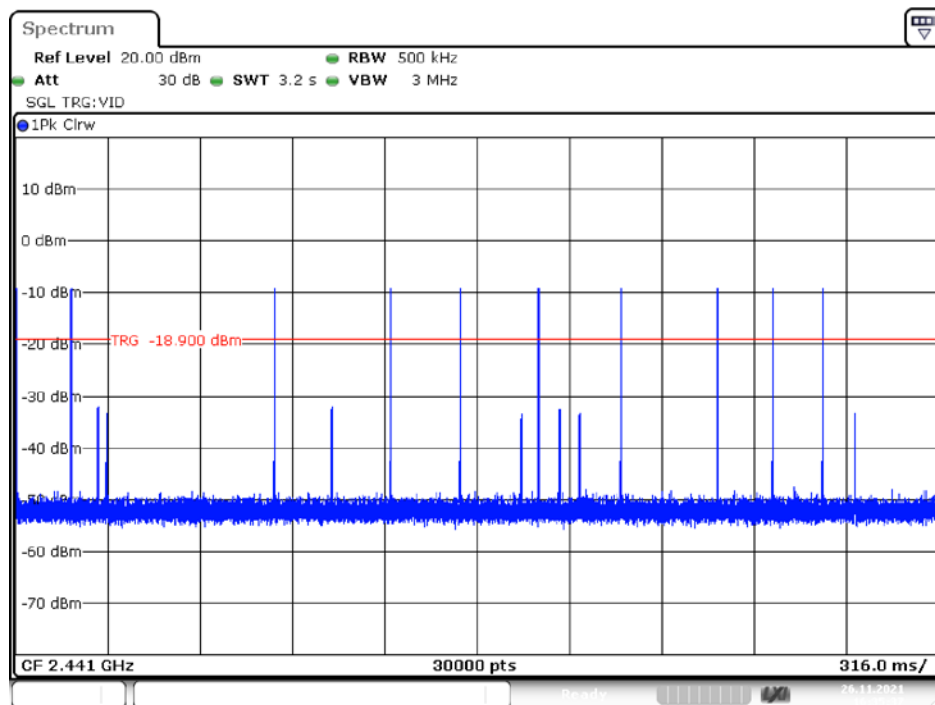


Date: 26.NOV.2021 16:35:37

2DH1_Ant1_Hop

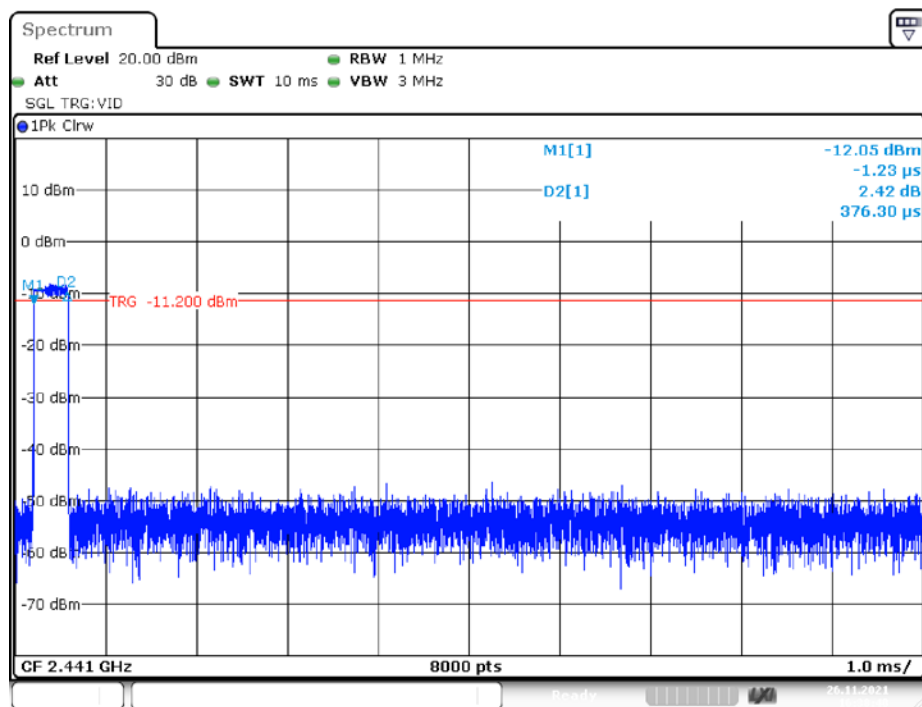


Date: 26.NOV.2021 16:38:48

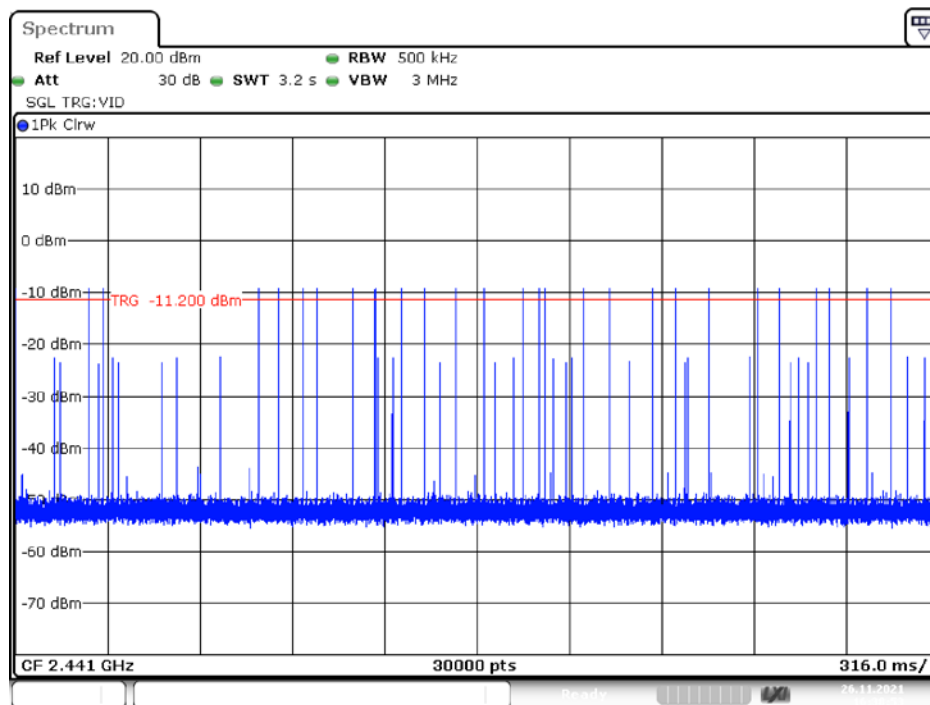


Date: 26.NOV.2021 16:38:53

2DH3_Ant1_Hop

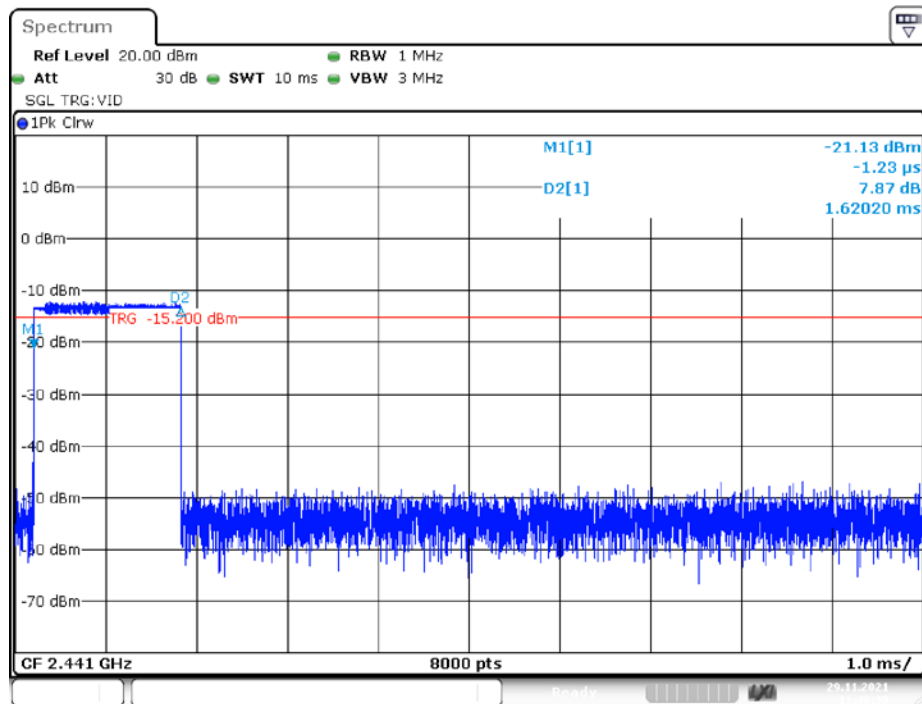


Date: 29.NOV.2021 11:48:31

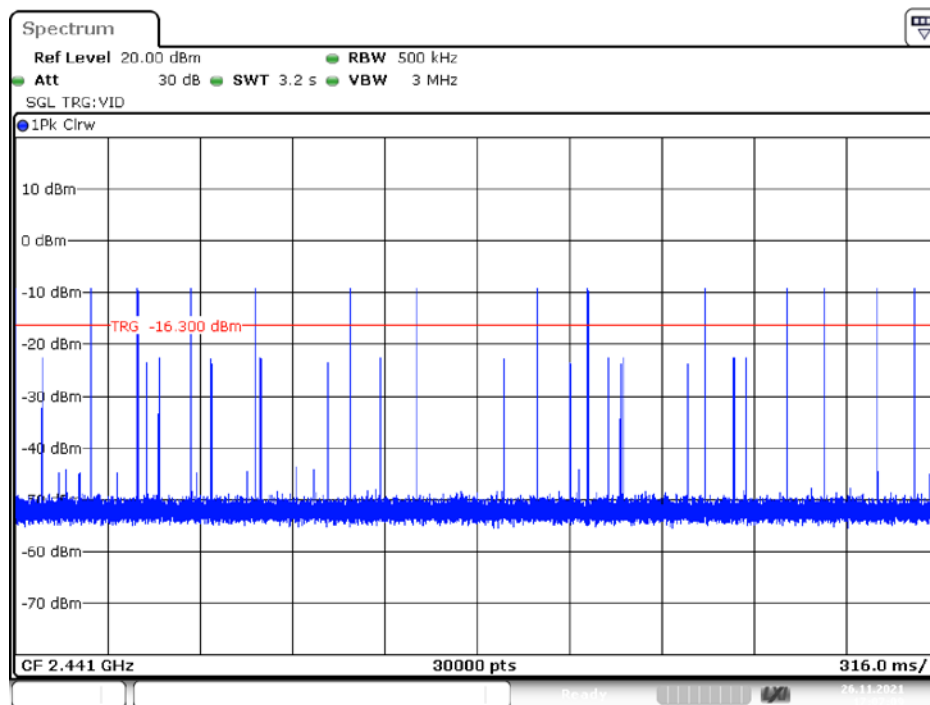


Date: 26.NOV.2021 17:07:09

2DH5_Ant1_Hop

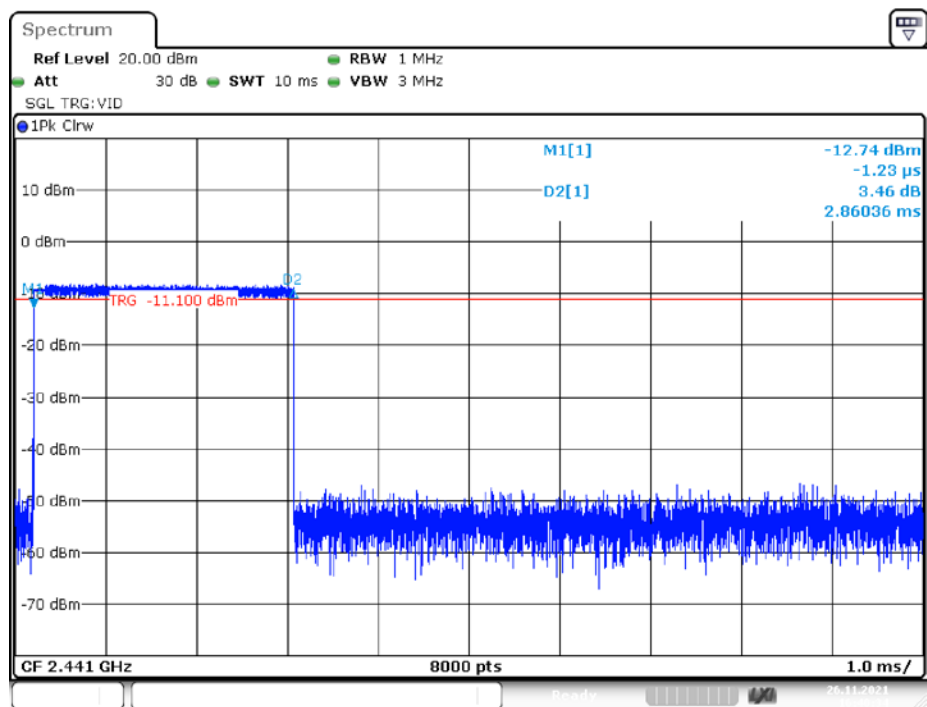


Date: 26.NOV.2021 16:40:34

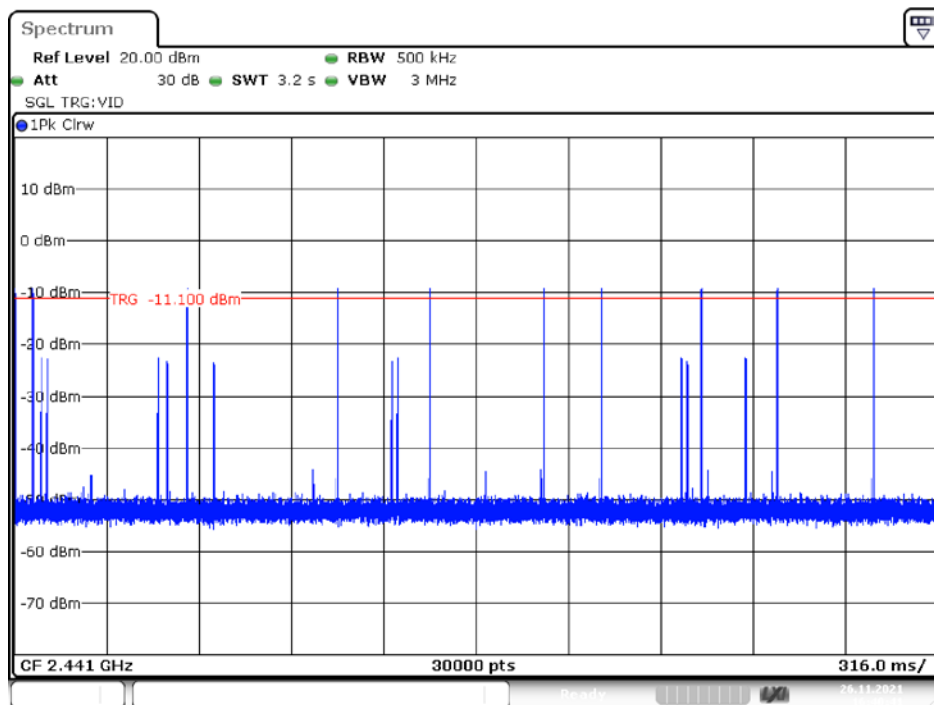


Date: 26.NOV.2021 16:40:41

3DH1_Ant1_Hop

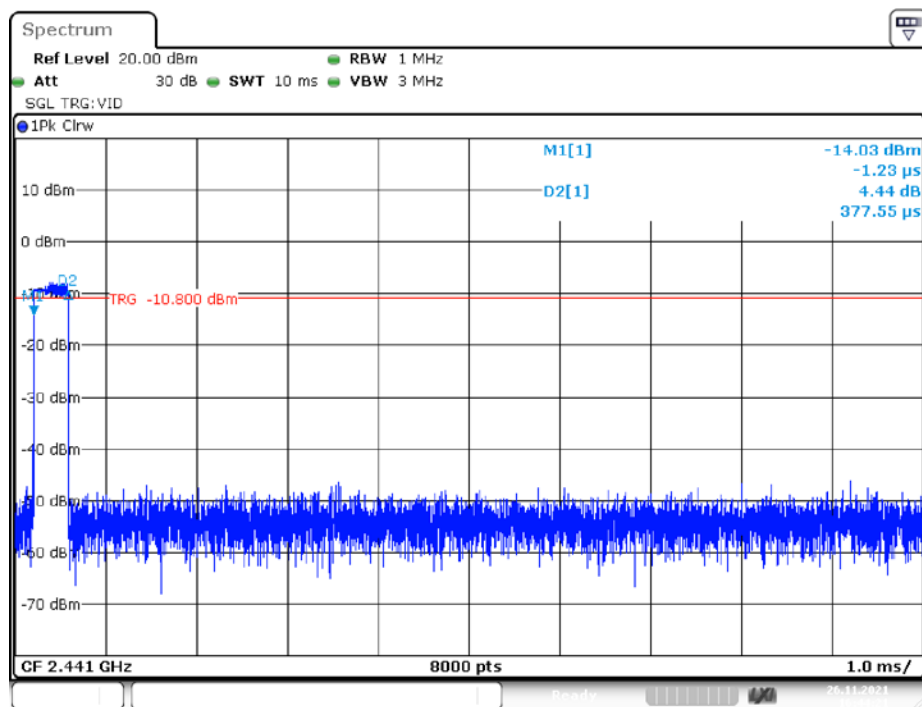


Date: 26.NOV.2021 16:44:21

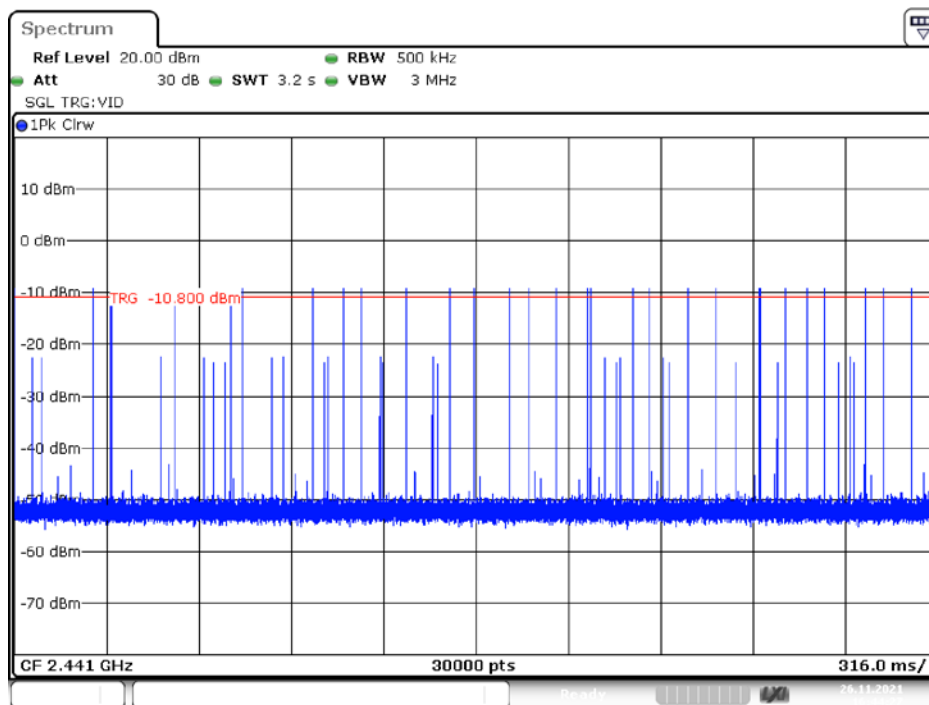


Date: 26.NOV.2021 16:44:27

3DH3_Ant1_Hop

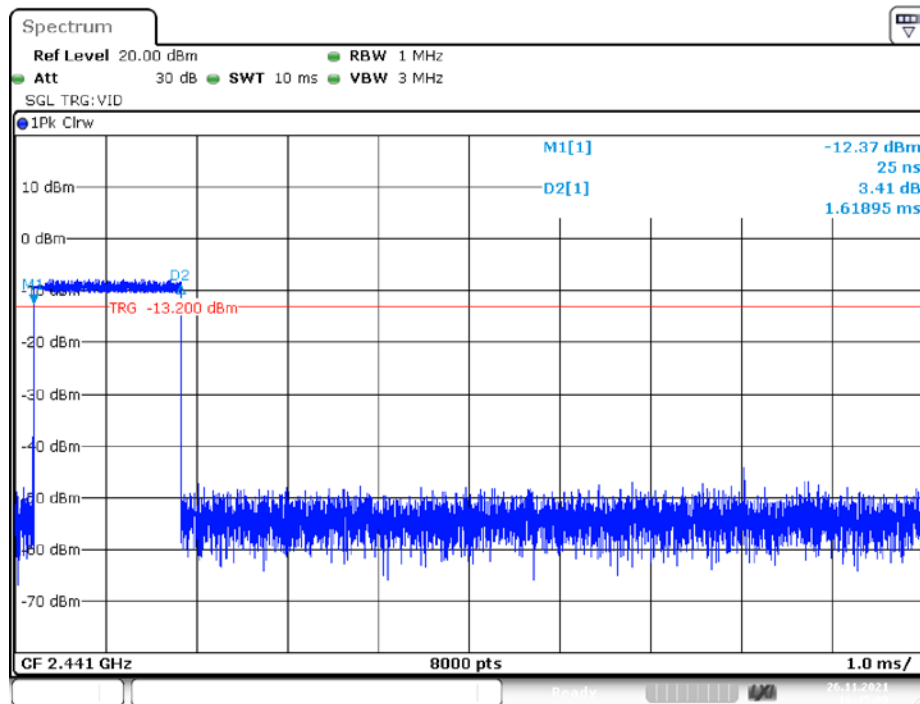


Date: 26.NOV.2021 16:45:00

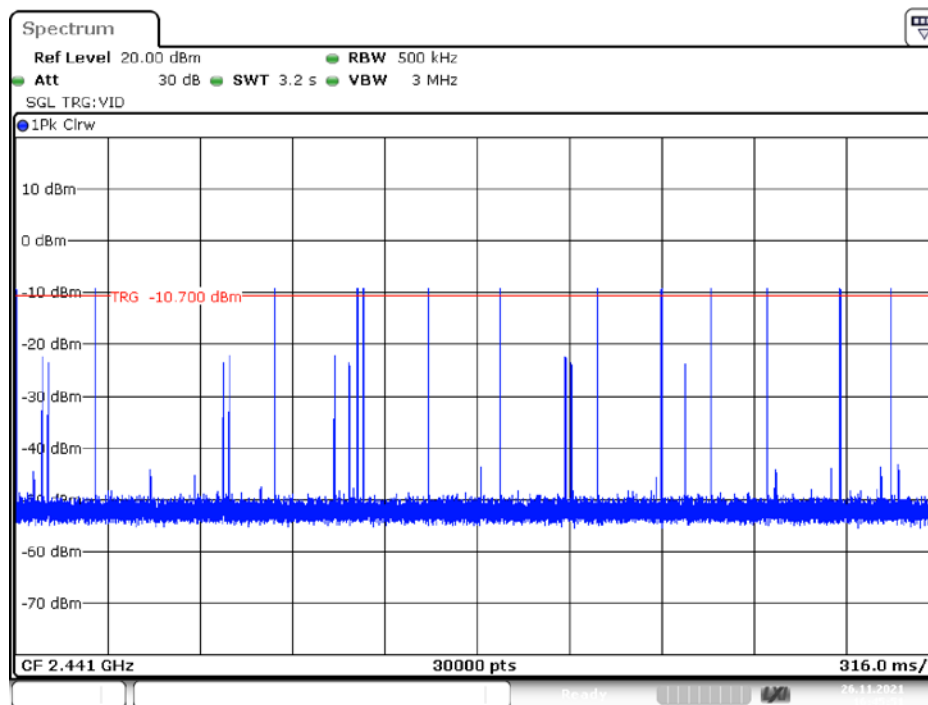


Date: 26.NOV.2021 16:45:51

3DH5_Ant1_Hop

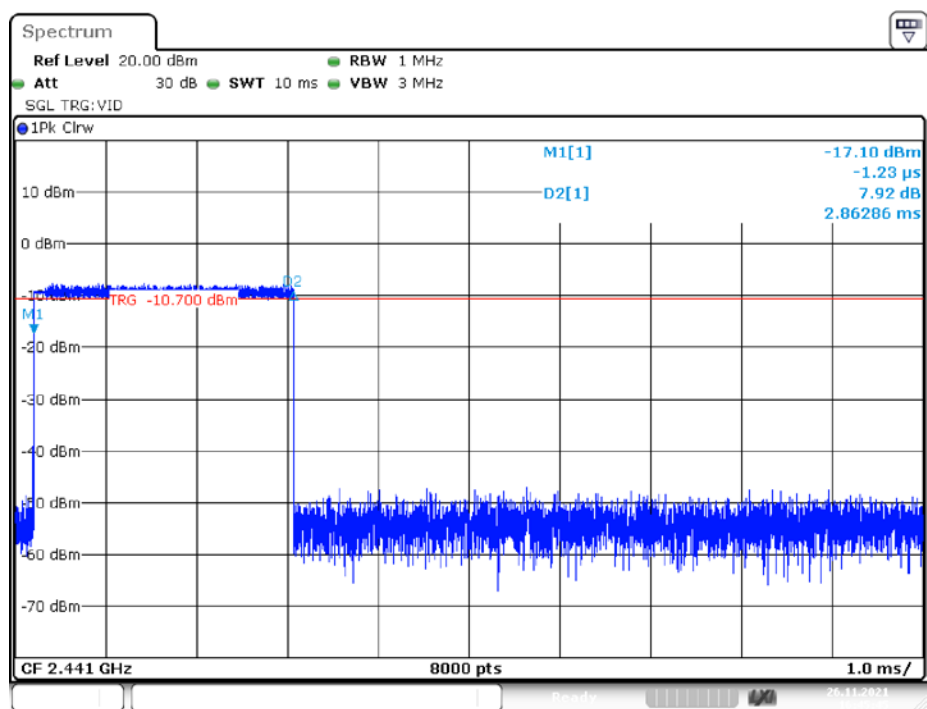

Date: 26.NOV.2021 16:45:45

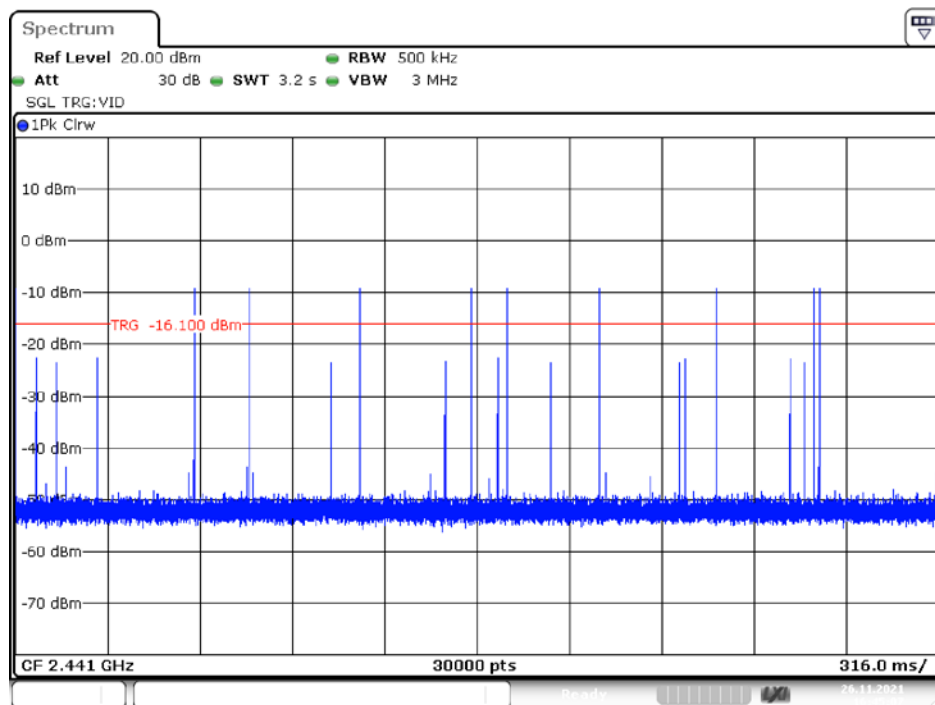

Date: 26.NOV.2021 16:45:07

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data

Environmental Conditions

Temperature:	23°C
Relative Humidity:	51 %
ATM Pressure:	101.1 kPa


The testing was performed by Paul Liu on 2021-11-26.

EUT operation mode: Transmitting

Test Result: Compliant.


Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH1	Ant1	2402	3.39	<=20.97	PASS
		2441	3.94	<=20.97	PASS
		2480	3.99	<=20.97	PASS
2DH1	Ant1	2402	4.81	<=20.97	PASS
		2441	5.35	<=20.97	PASS
		2480	5.41	<=20.97	PASS
3DH1	Ant1	2402	5.10	<=20.97	PASS
		2441	5.61	<=20.97	PASS
		2480	5.71	<=20.97	PASS

DH1_Ant1_2402MHz

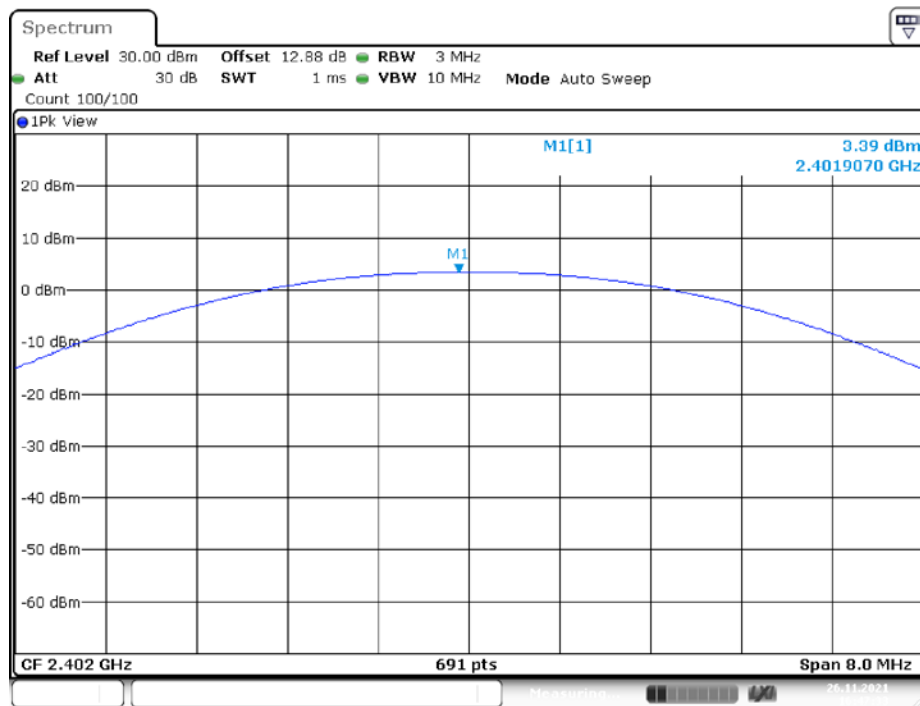


Date: 26.NOV.2021 16:47:33

DH1_Ant1_2441MHz

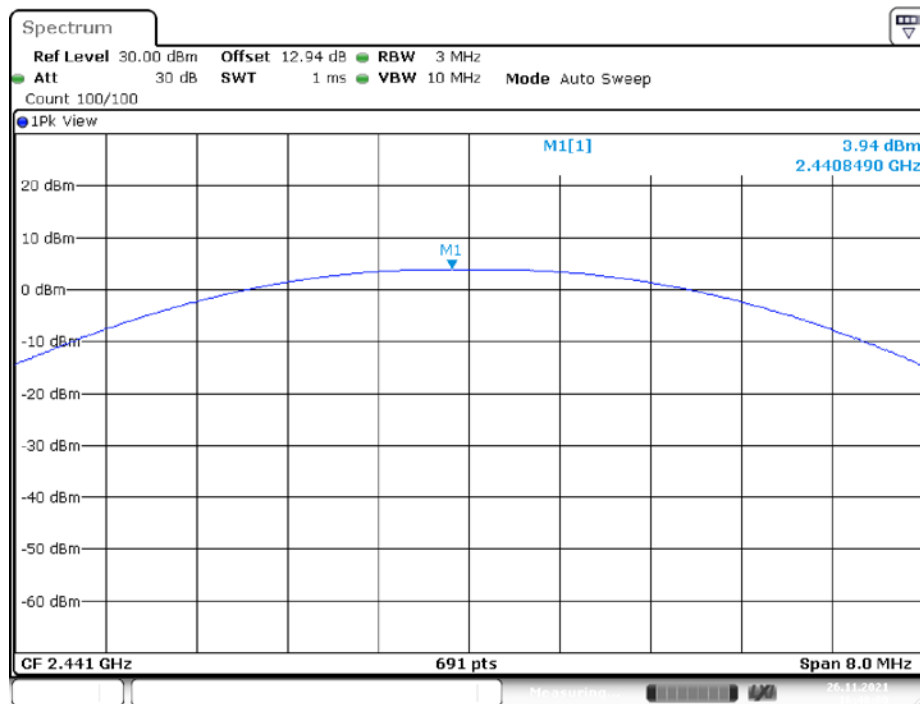


Date: 26.NOV.2021 16:48:00


DH1_Ant1_2480MHz

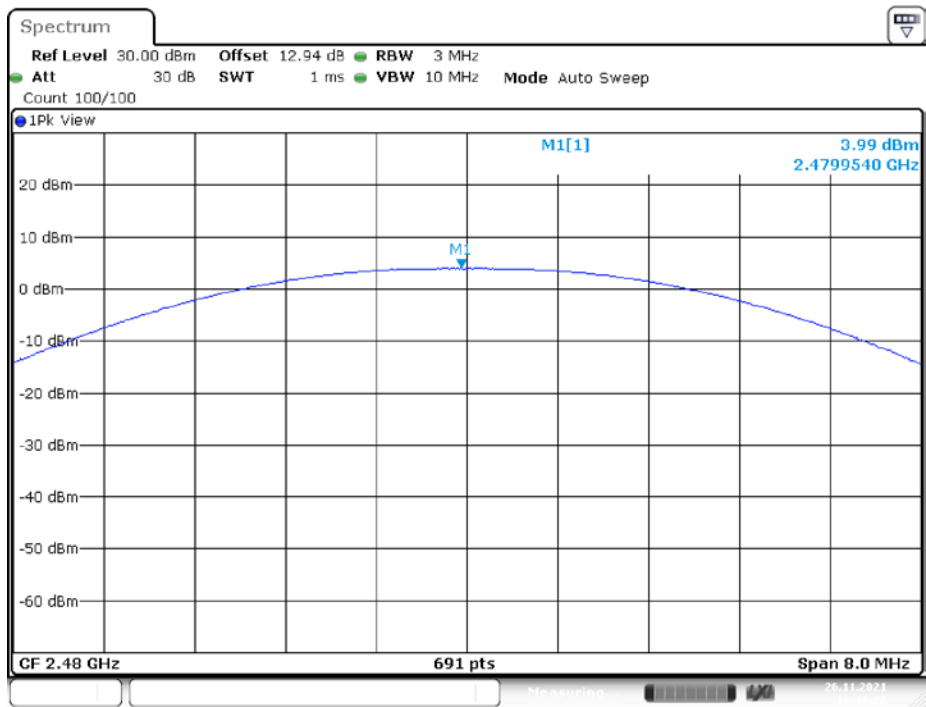

2DH1_Ant1_2402MHz

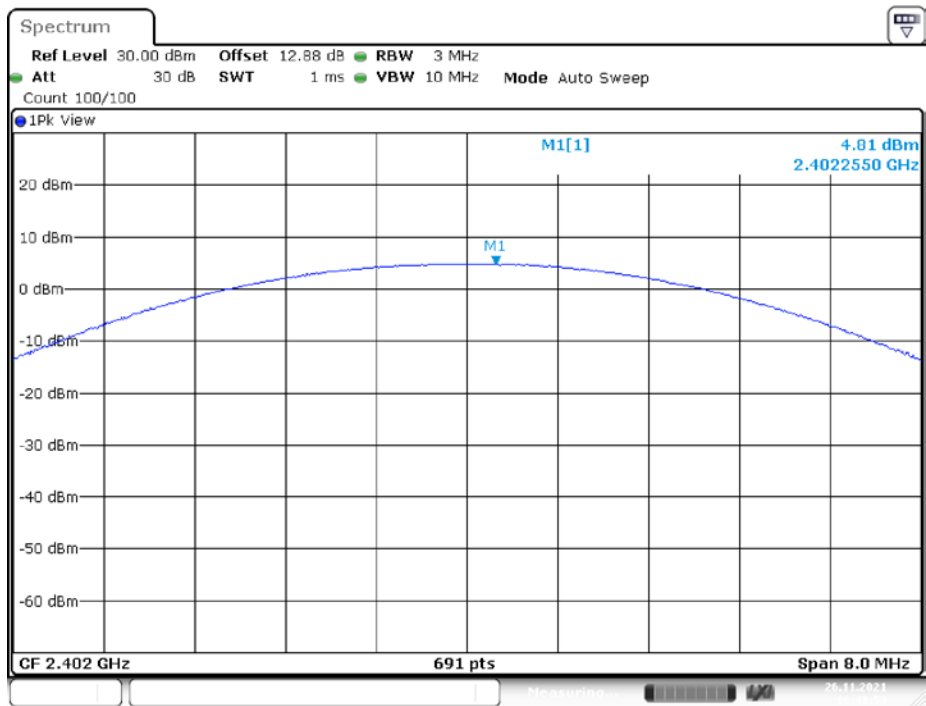


2DH1_Ant1_2441MHz

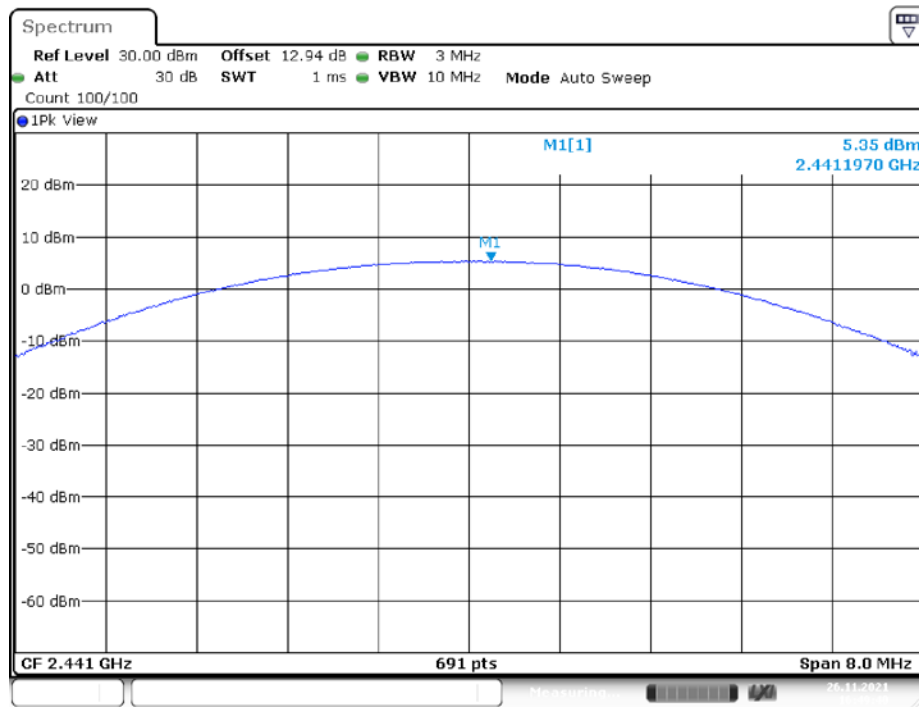


Date: 26.NOV.2021 16:49:40

2DH1_Ant1_2480MHz

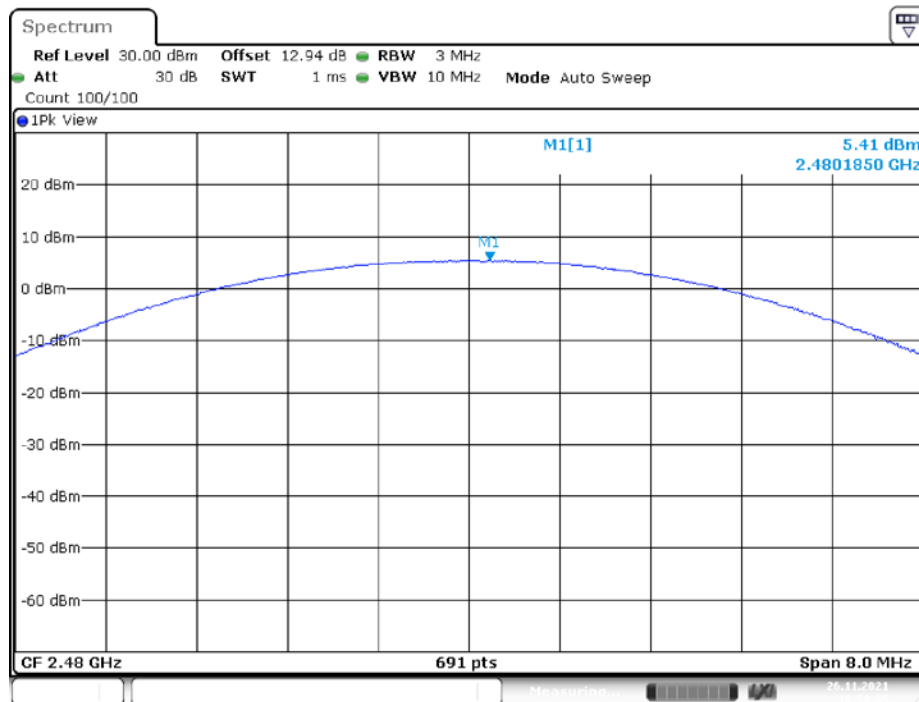


Date: 26.NOV.2021 16:50:05

3DH1_Ant1_2402MHz

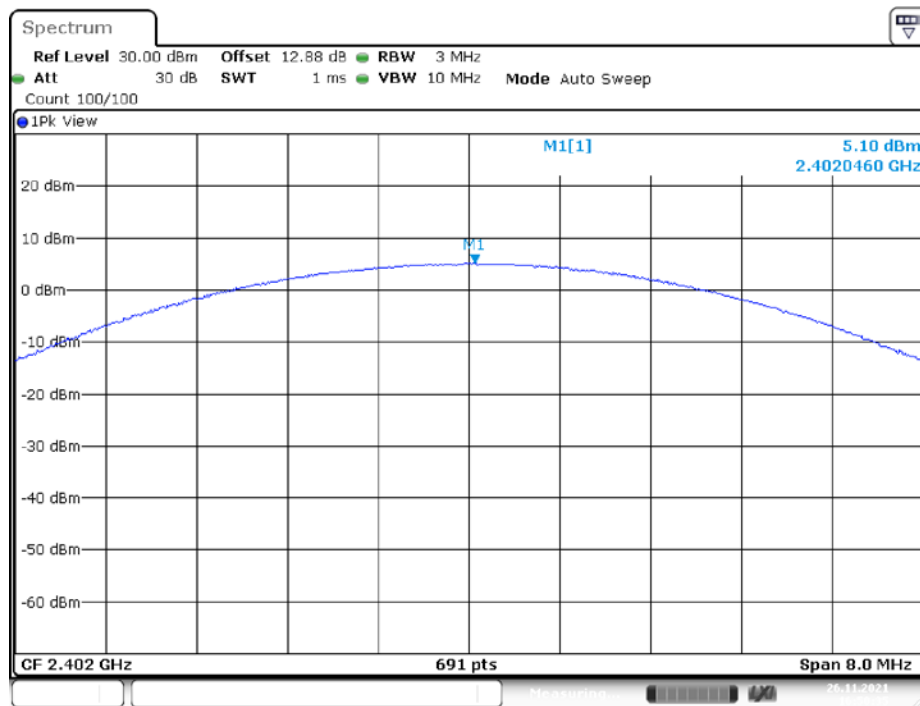


Date: 26.NOV.2021 16:50:35

3DH1_Ant1_2441MHz

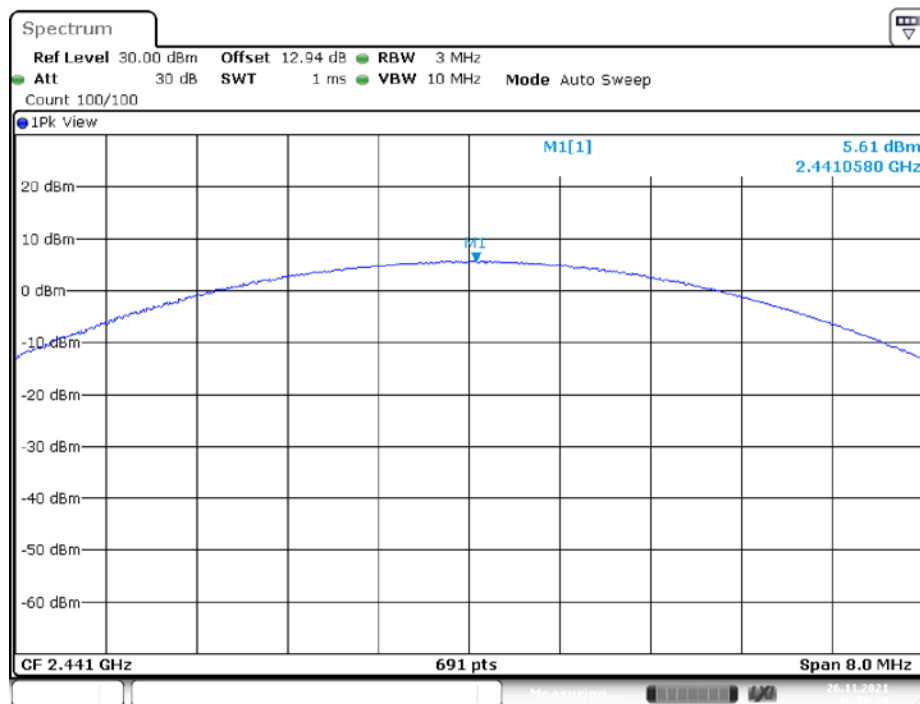

Date: 26.NOV.2021 16:50:59

3DH1_Ant1_2480MHz

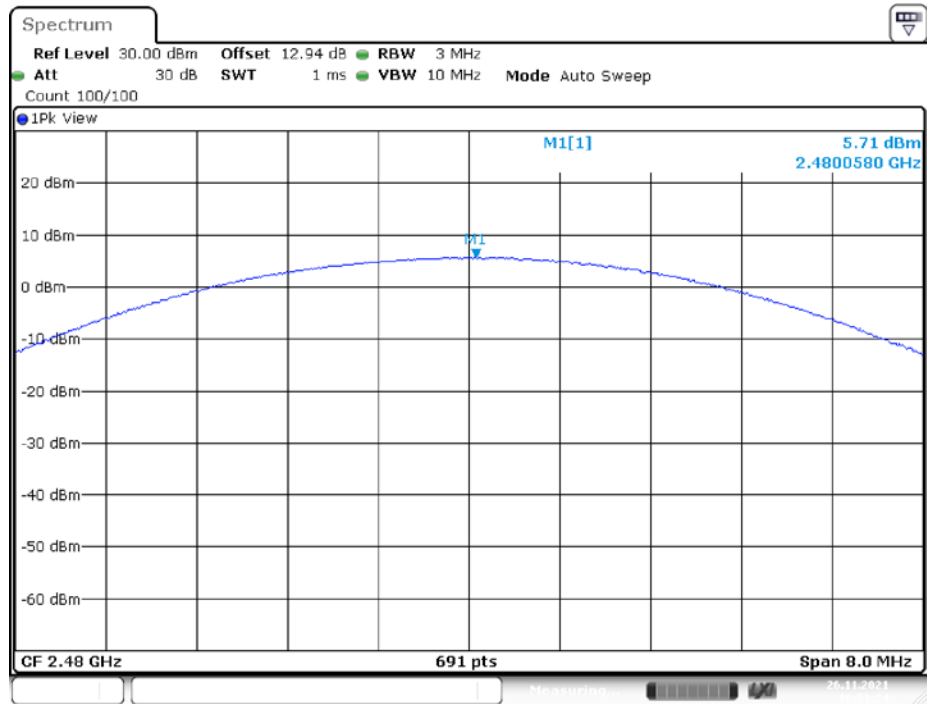

Date: 26.NOV.2021 16:51:24

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data



Environmental Conditions

Temperature:	23°C
Relative Humidity:	51 %
ATM Pressure:	101.1 kPa


The testing was performed by Paul Liu on 2021-11-26.

EUT operation mode: Transmitting

Test Result: Compliant.

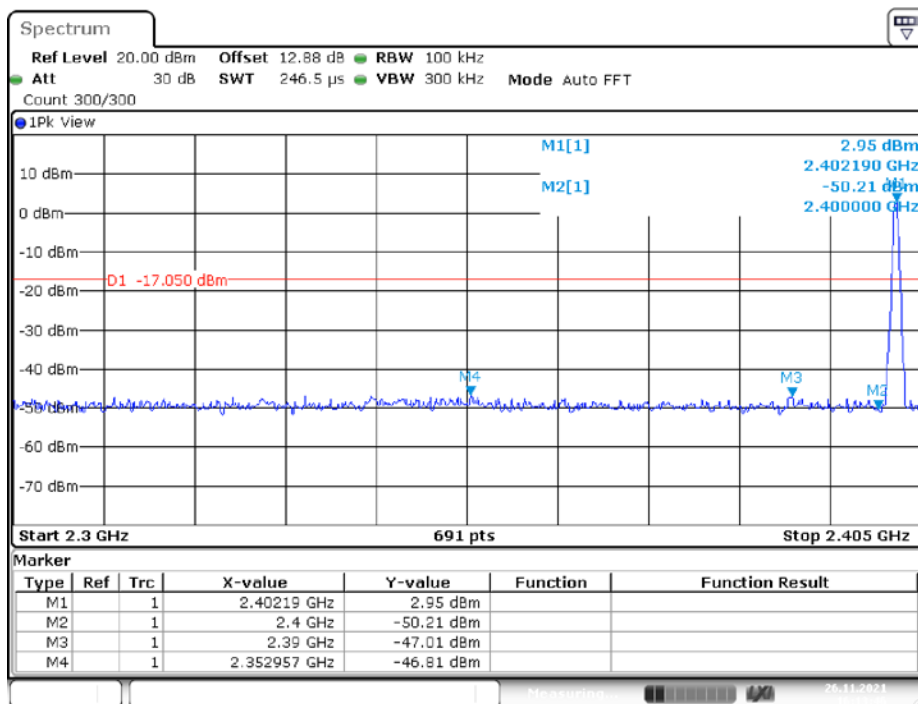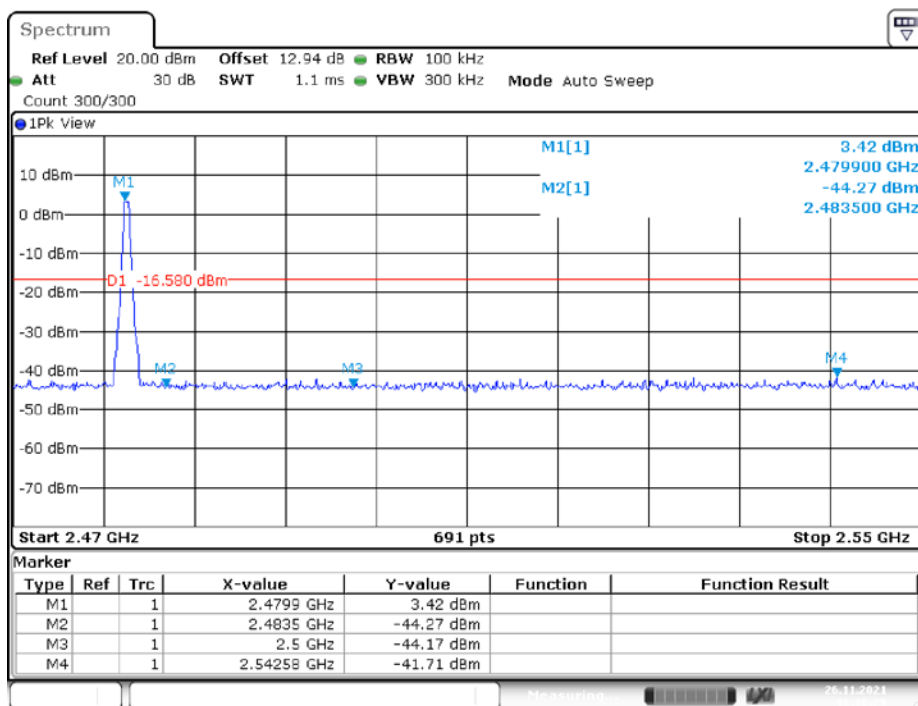
Conducted Band Edge Result:**DH1_Ant1_Low_2402MHz****DH1_Ant1_High_2480MHz**

DH1_Ant1_Low_Hop_2402MHz

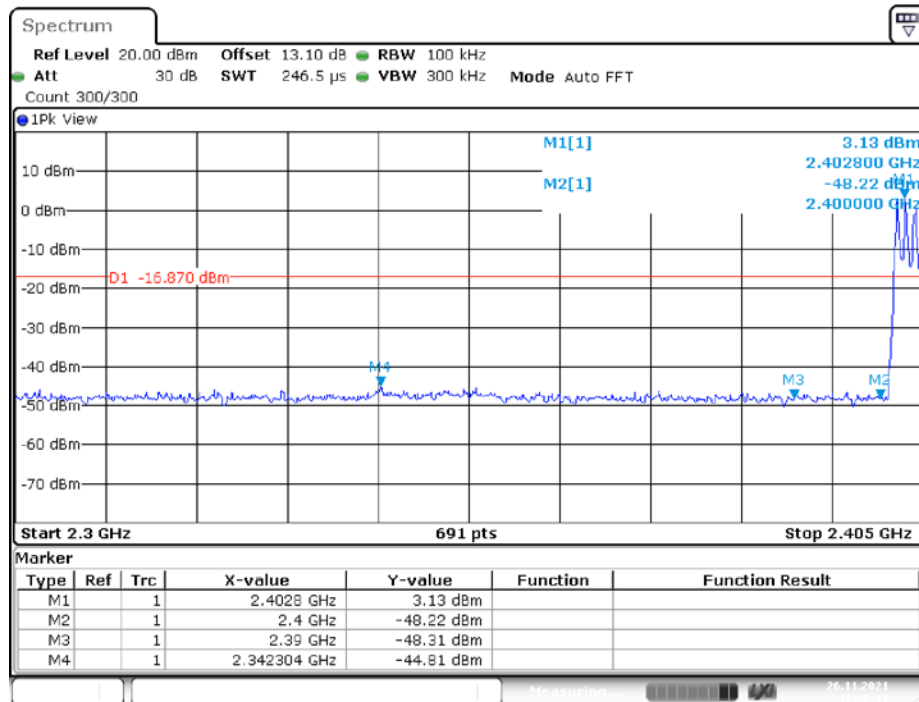


Date: 26.NOV.2021 16:30:11

DH1_Ant1_High_Hop_2480MHz

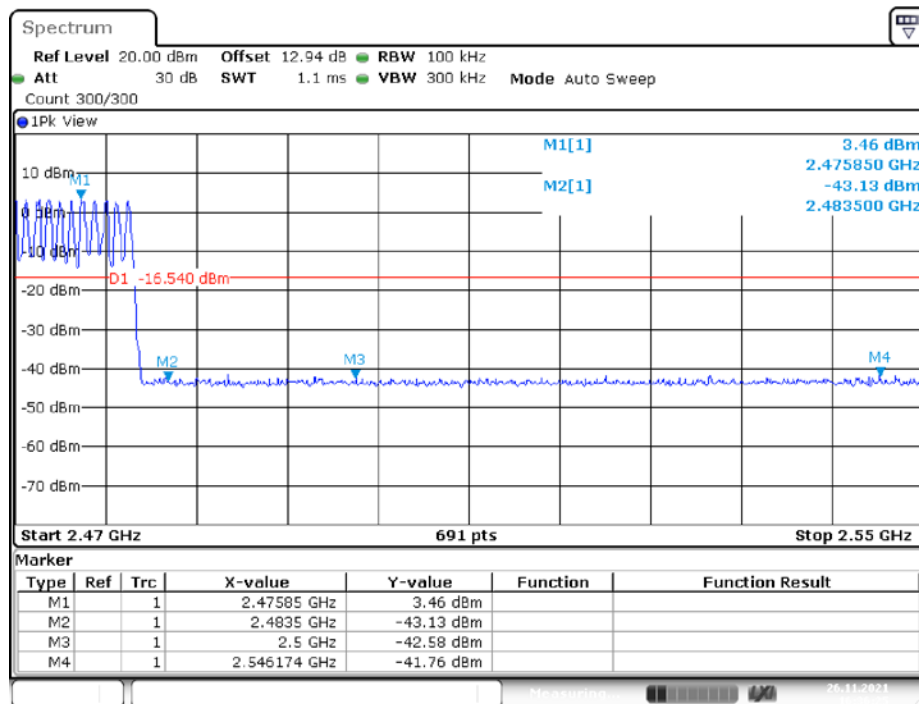


Date: 26.NOV.2021 16:36:24


2DH1_Ant1_Low_2402MHz

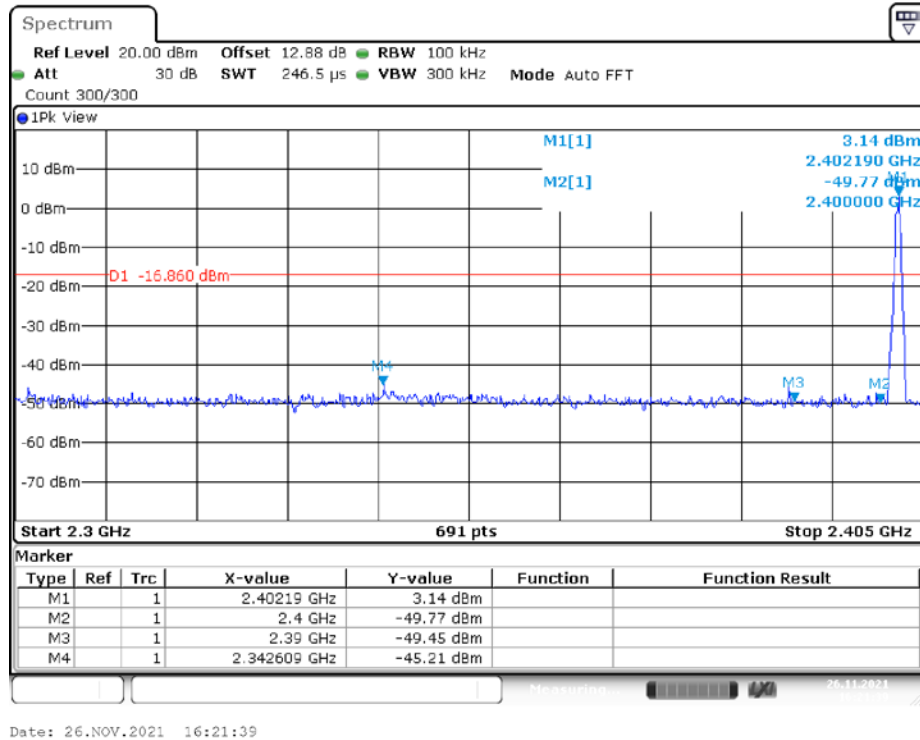

2DH1_Ant1_High_2480MHz

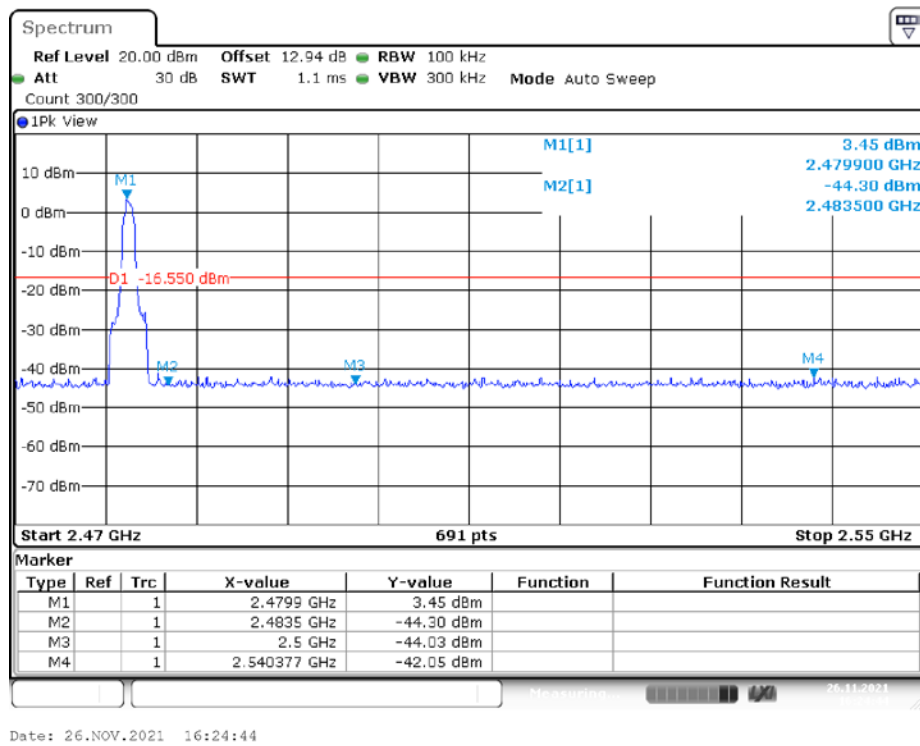


2DH1_Ant1_Low_Hop_2402MHz

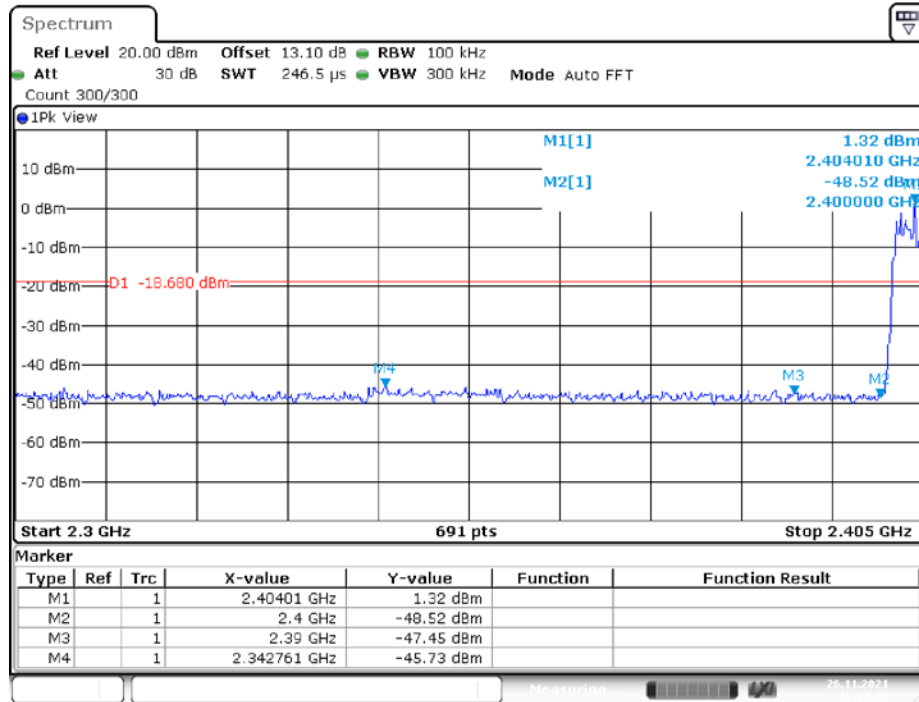


Date: 26.NOV.2021 16:37:28

2DH1_Ant1_High_Hop_2480MHz

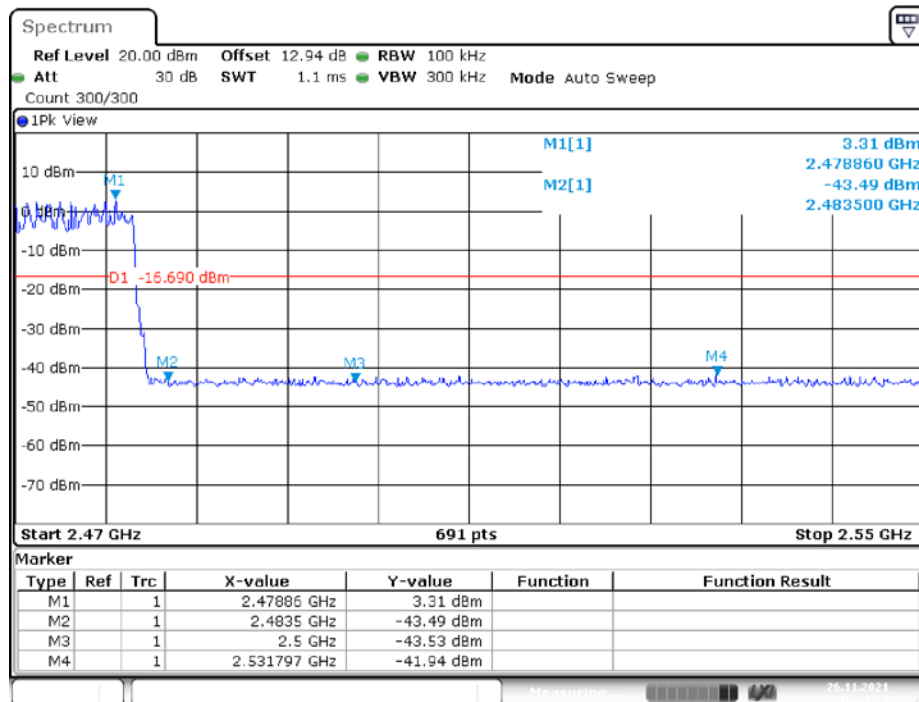


Date: 26.NOV.2021 16:41:24


3DH1_Ant1_Low_2402MHz

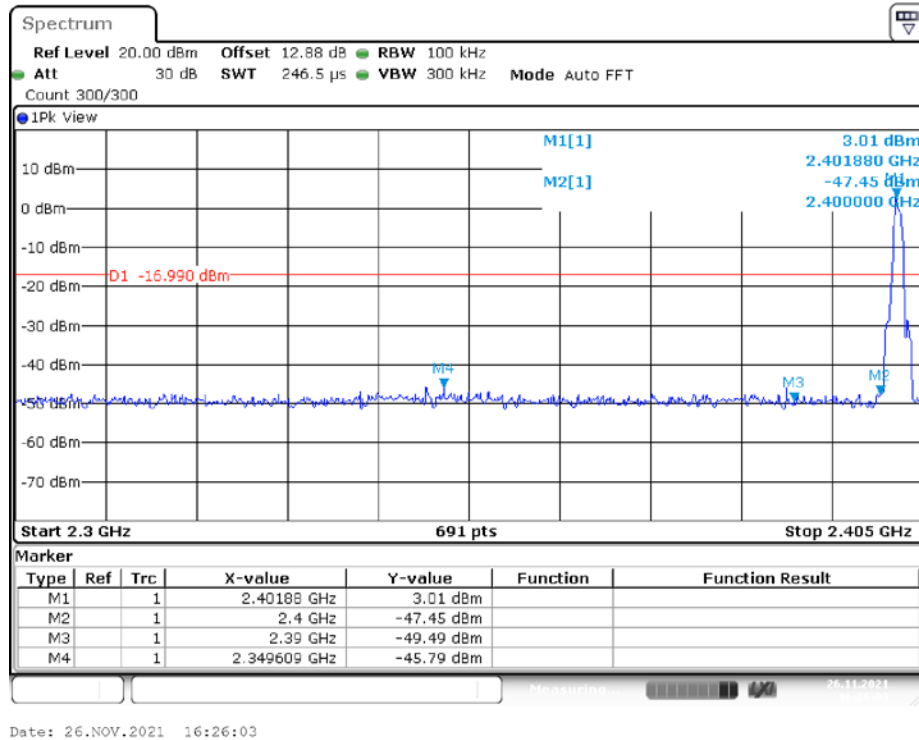

3DH1_Ant1_High_2480MHz

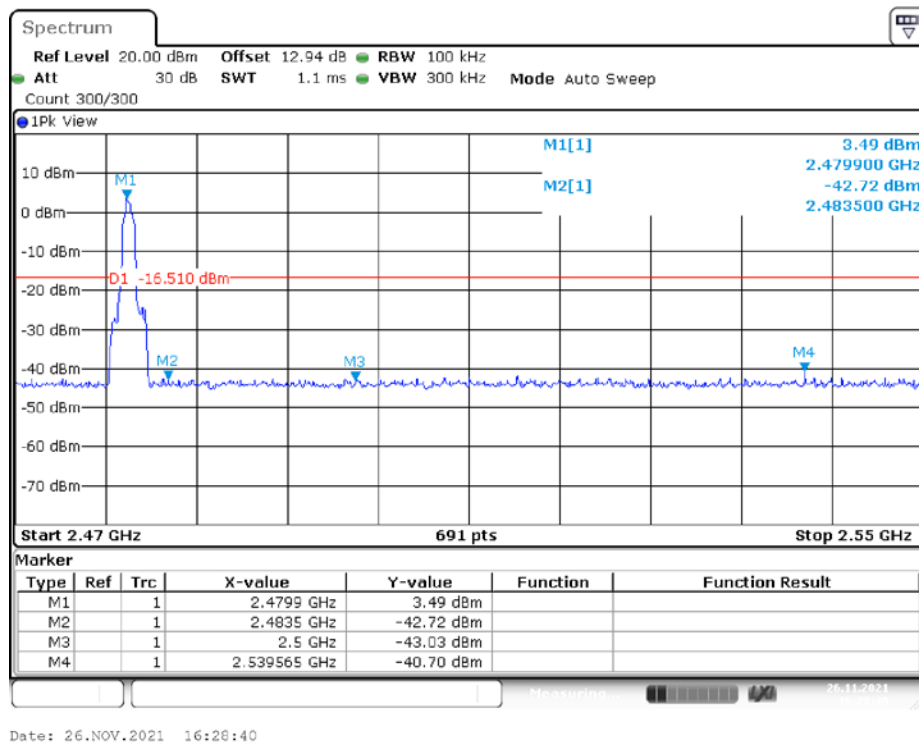


3DH1_Ant1_Low_Hop_2402MHz

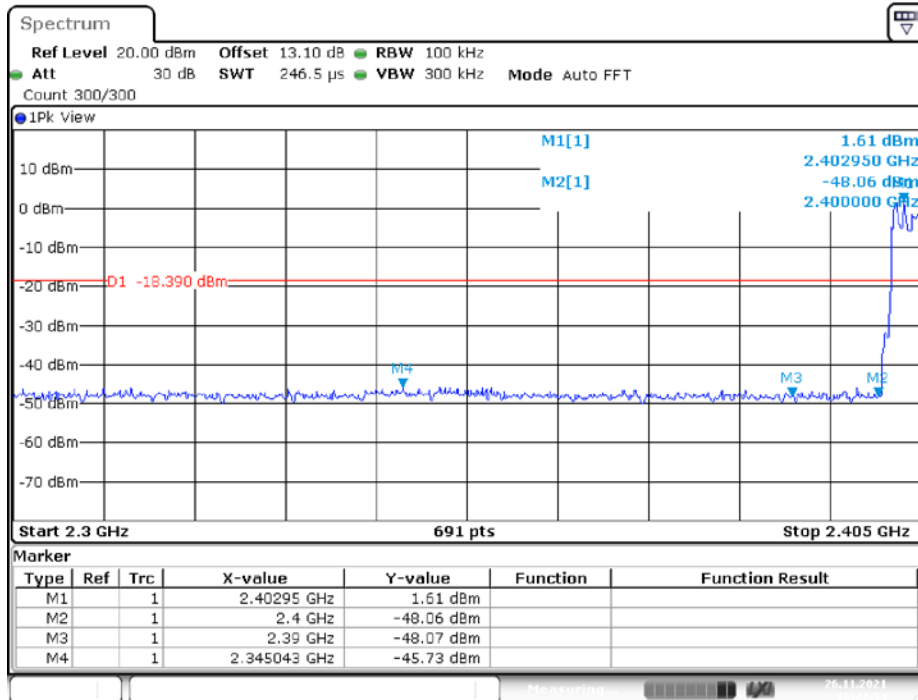

Date: 26.NOV.2021 16:42:53

3DH1_Ant1_High_Hop_2480MHz

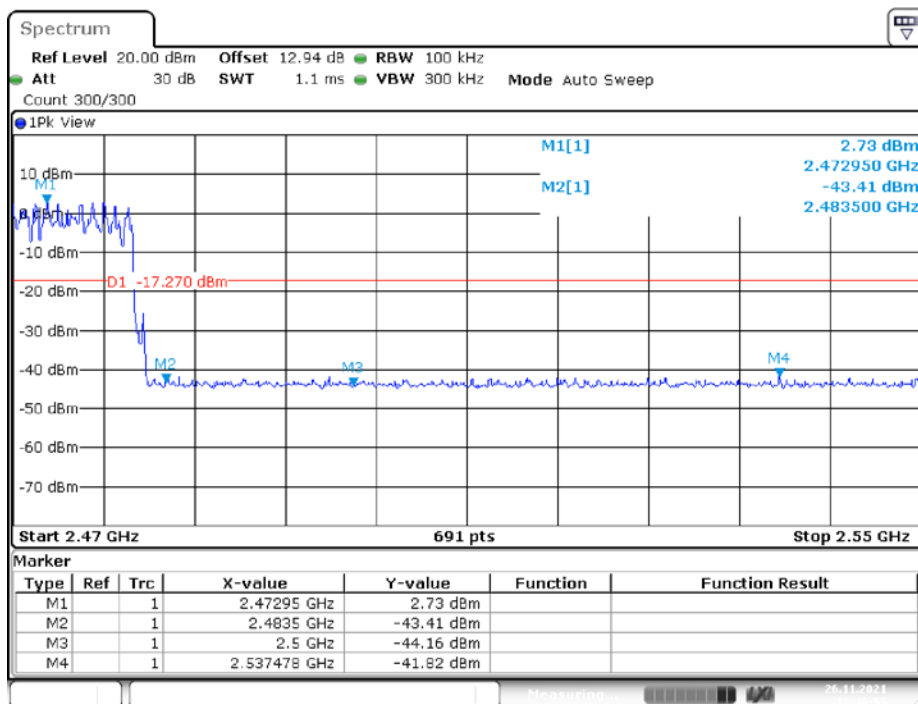

Date: 26.NOV.2021 16:46:55

***** END OF REPORT *****