
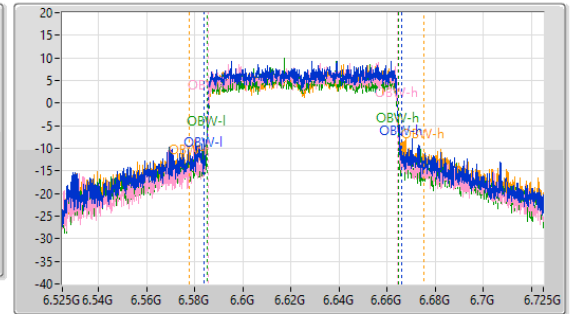


6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW

6625MHz

22/02/2025


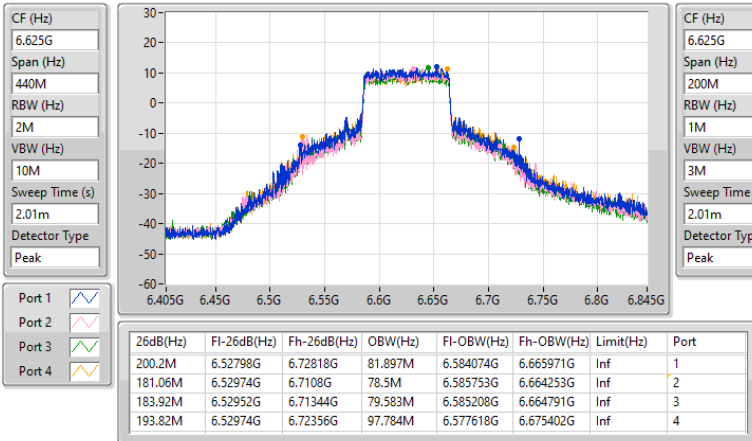


6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW

6705MHz

22/02/2025

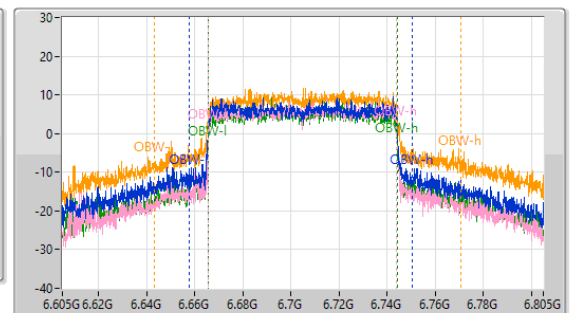
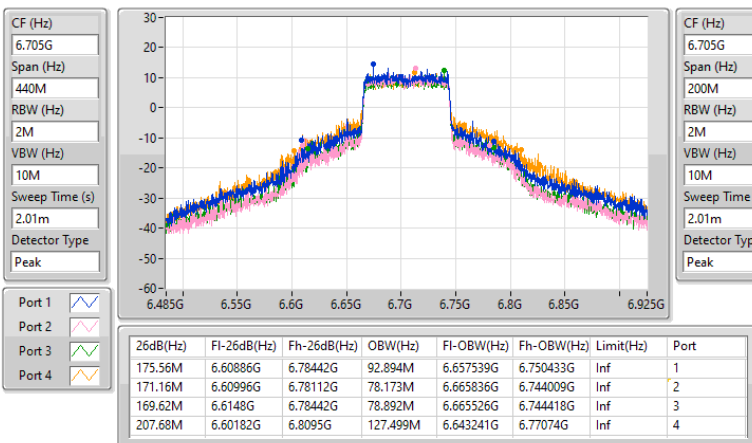


6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

EBW

6785MHz

22/02/2025

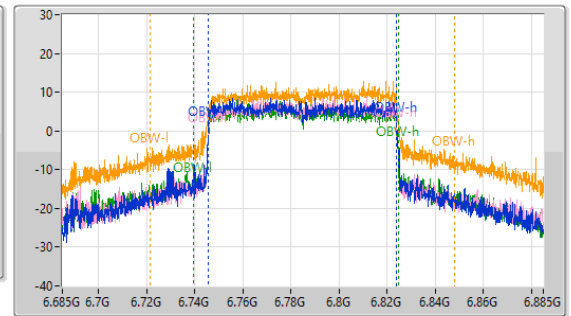
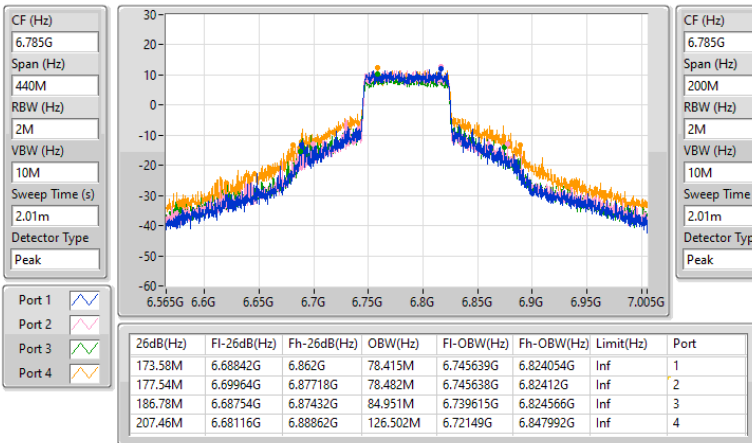


6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_4TX

EBW

6665MHz

22/02/2025

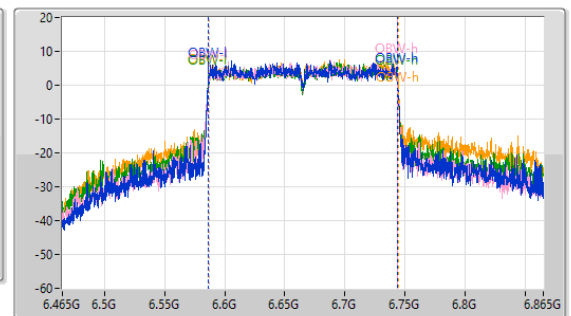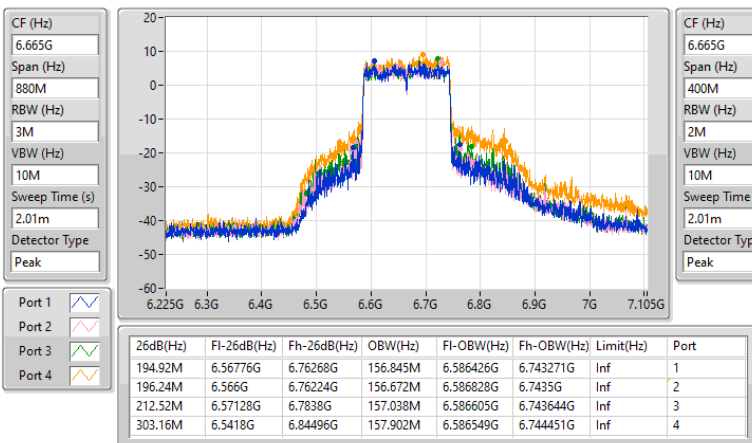

Test Mode: Mode 17
Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	50.27M	28.63M	28M6D1D	21.56M	19.108M
802.11be EHT40_Nss1,(MCS0)_2TX	97.24M	55.857M	55M9D1D	40.92M	37.828M
802.11be EHT80_Nss1,(MCS0)_2TX	198.88M	113.462M	113MD1D	82.06M	77.318M
802.11be EHT160_Nss1,(MCS0)_2TX	318.12M	158.012M	158MD1D	179.08M	156.548M
802.11be EHT320_Nss1,(MCS0)_2TX	481.36M	319.159M	319MD1D	326.48M	315.449M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_2TX	42.13M	19.397M	19M4D1D	37.07M	19.208M
802.11be EHT40_Nss1,(MCS0)_2TX	74.91M	38.086M	38M1D1D	49.5M	37.926M
802.11be EHT80_Nss1,(MCS0)_2TX	138.6M	78.157M	78M2D1D	105.6M	77.725M
802.11be EHT160_Nss1,(MCS0)_2TX	310.2M	158.071M	158MD1D	301.4M	157.818M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5955MHz	Pass	Inf	21.725M	19.108M	21.56M	19.16M
6195MHz	Pass	Inf	50.215M	19.969M	50.27M	28.63M
6415MHz	Pass	Inf	43.285M	19.297M	41.195M	19.372M
6535MHz	Pass	Inf	42.075M	19.262M	41.91M	19.238M
6695MHz	Pass	Inf	37.785M	19.208M	37.07M	19.312M
6855MHz	Pass	Inf	42.13M	19.222M	38.775M	19.397M
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5965MHz	Pass	Inf	41.03M	37.856M	40.92M	37.828M
6205MHz	Pass	Inf	90.97M	38.373M	97.24M	55.857M
6405MHz	Pass	Inf	56.21M	38.031M	61.38M	38.115M
6565MHz	Pass	Inf	49.5M	38.004M	62.59M	37.996M
6685MHz	Pass	Inf	58.08M	37.926M	74.91M	38.034M
6845MHz	Pass	Inf	50.16M	37.994M	70.29M	38.086M
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5985MHz	Pass	Inf	97.24M	77.414M	82.06M	77.318M
6225MHz	Pass	Inf	171.6M	78.717M	198.88M	113.462M
6385MHz	Pass	Inf	123.42M	78.039M	140.58M	78.371M
6625MHz	Pass	Inf	125.18M	77.886M	120.78M	77.909M
6705MHz	Pass	Inf	105.6M	77.727M	138.6M	78.056M
6785MHz	Pass	Inf	106.26M	77.725M	126.72M	78.157M
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6025MHz	Pass	Inf	179.52M	156.665M	179.08M	156.548M
6185MHz	Pass	Inf	272.36M	157.855M	318.12M	157.964M
6345MHz	Pass	Inf	269.72M	157.607M	289.08M	158.012M
6665MHz	Pass	Inf	310.2M	158.071M	301.4M	157.818M
802.11be EHT320_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6105MHz	Pass	Inf	326.48M	316.322M	327.36M	315.449M
6265MHz	Pass	Inf	481.36M	319.159M	439.12M	318.733M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
5955MHz

19/12/2024

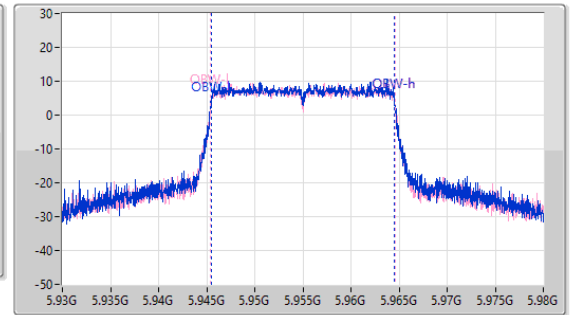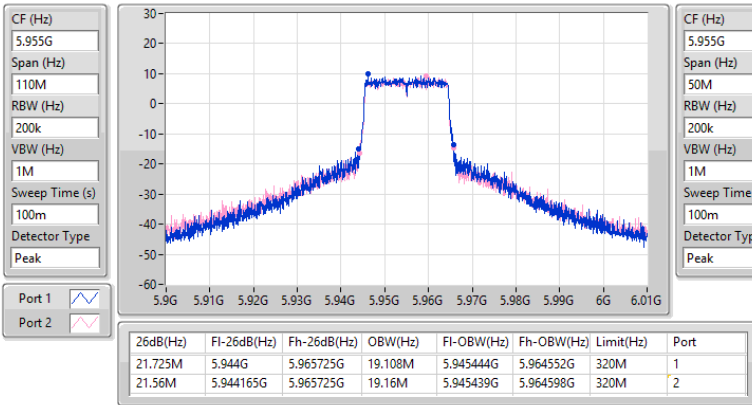

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6195MHz

19/12/2024

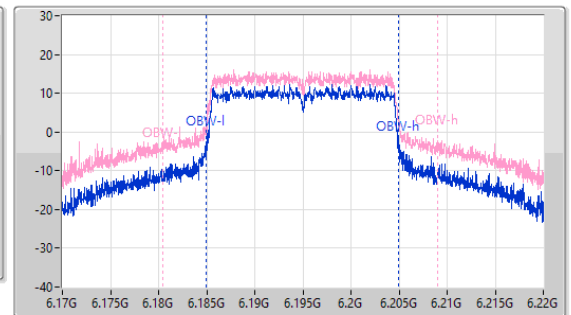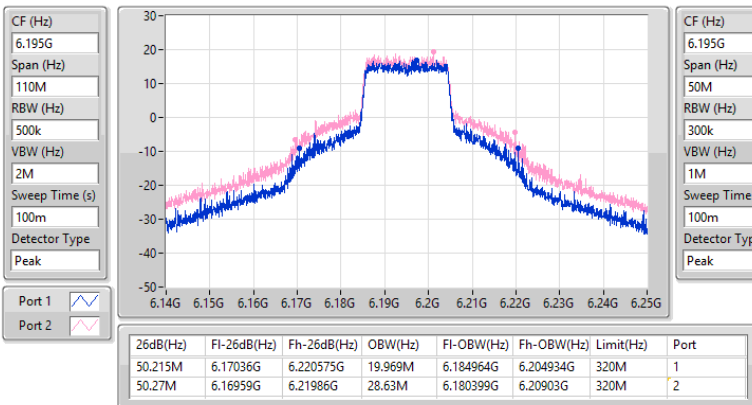


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6415MHz

19/12/2024

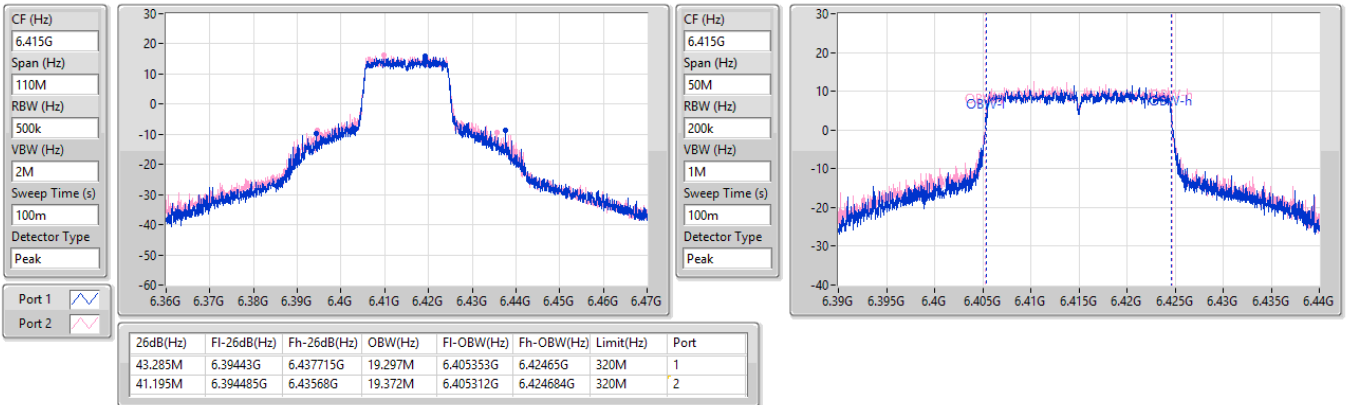

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6535MHz

19/12/2024

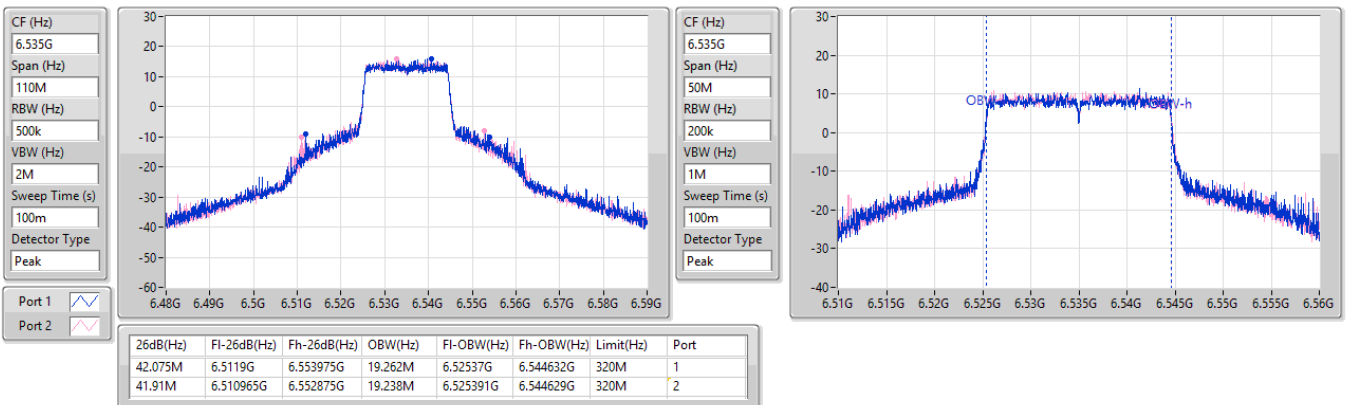


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6695MHz

19/12/2024


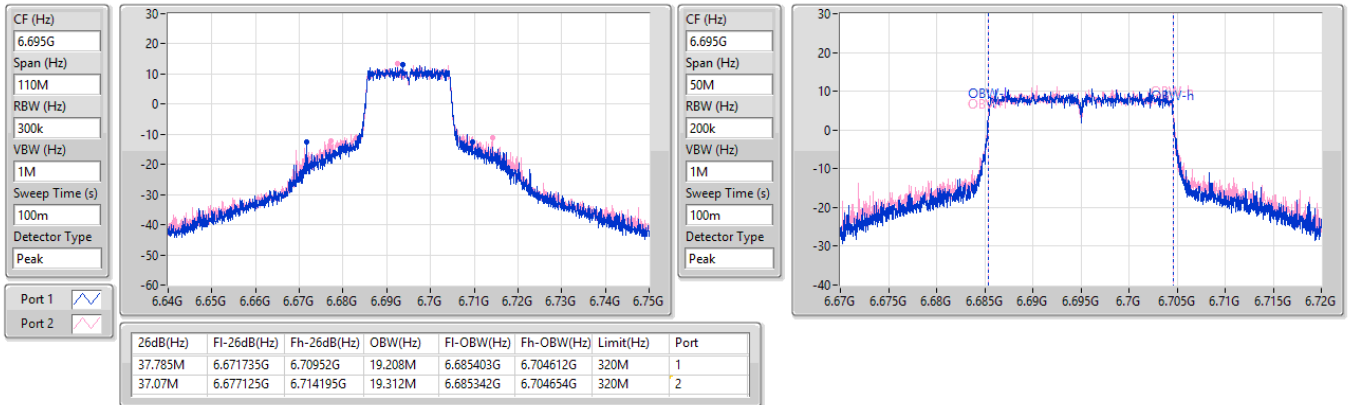

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
6855MHz

19/12/2024


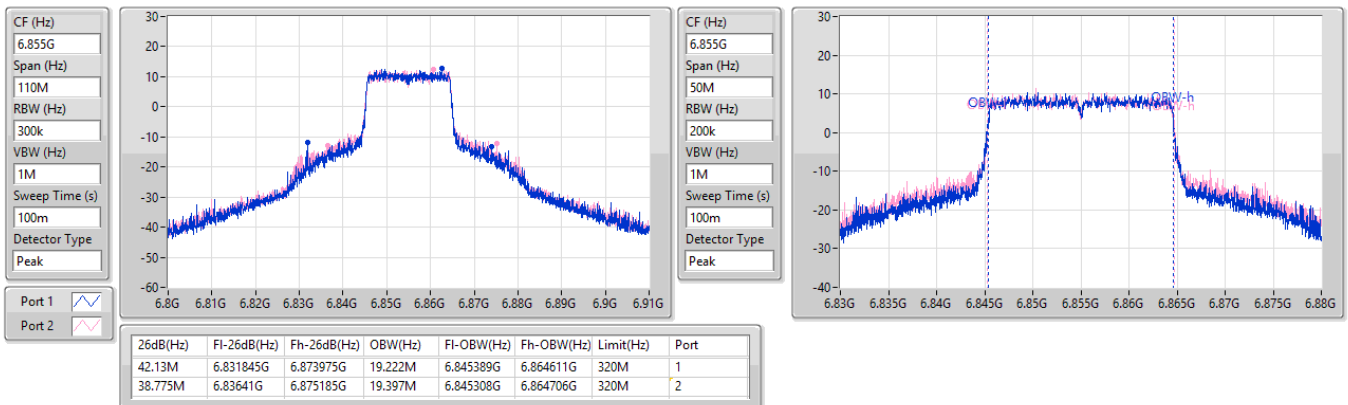


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
5965MHz

19/12/2024

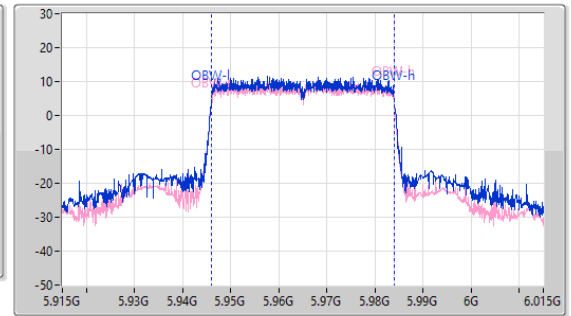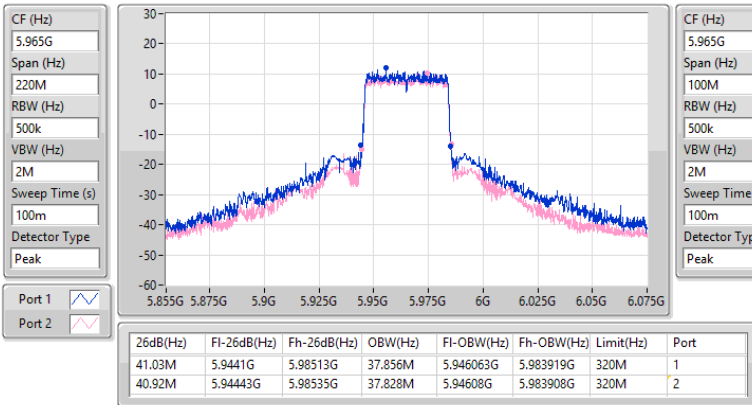
5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
6205MHz

19/12/2024

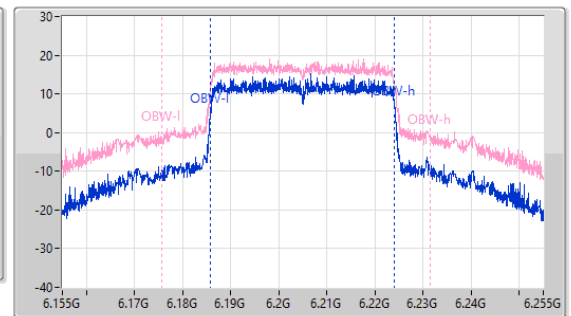
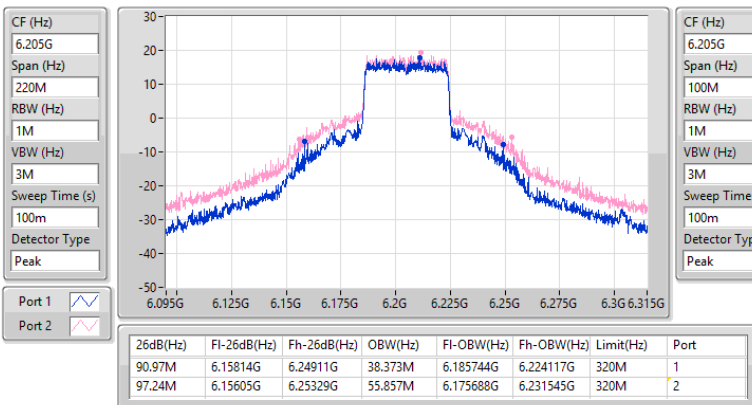


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

6405MHz

19/12/2024

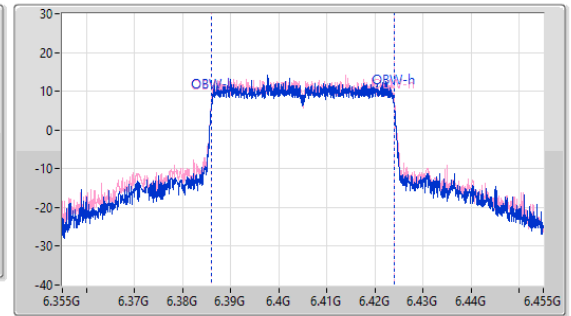
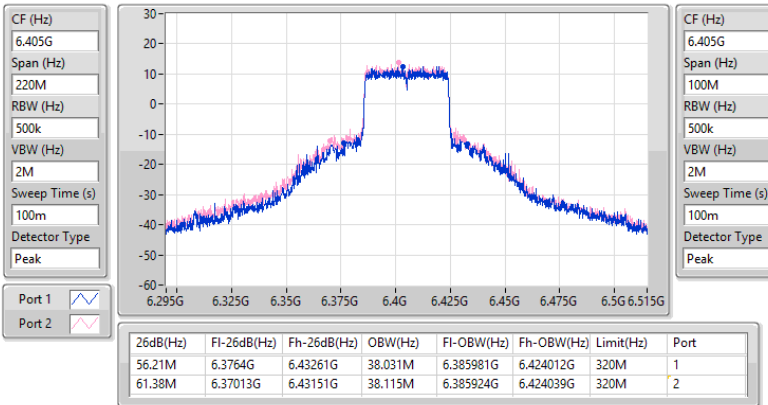


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

6565MHz

19/12/2024

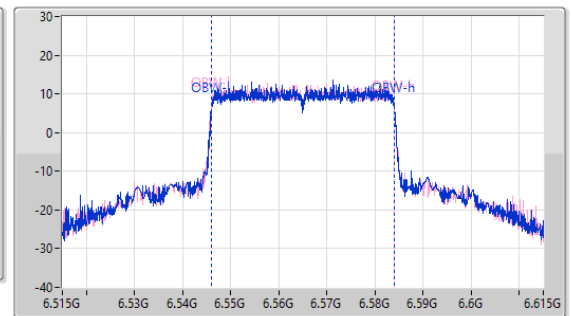
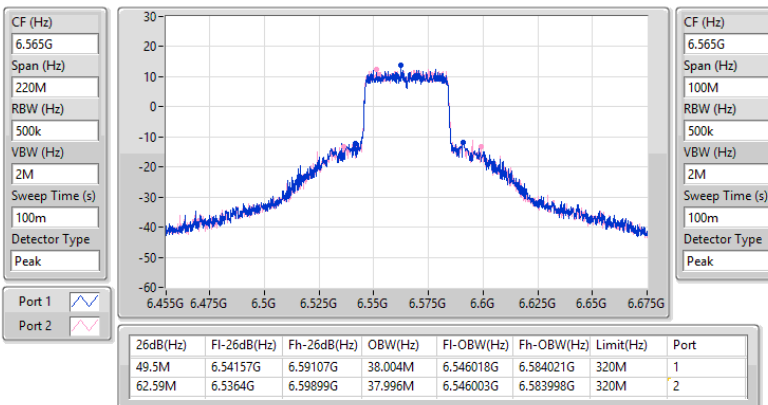


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

6685MHz

19/12/2024

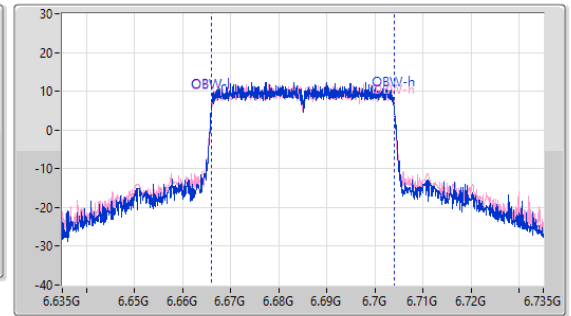
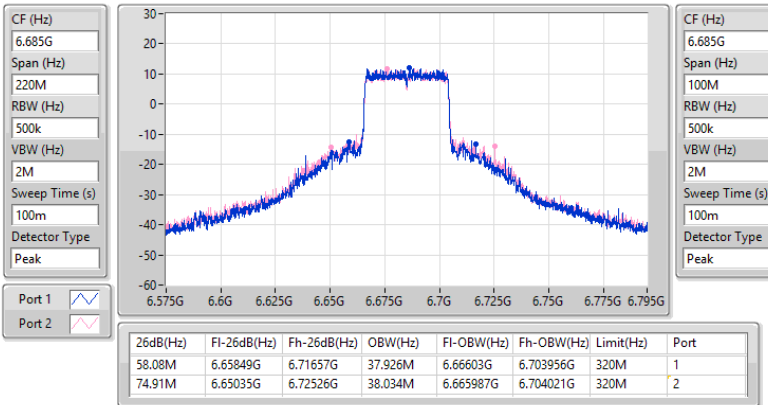


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW



6845MHz

19/12/2024

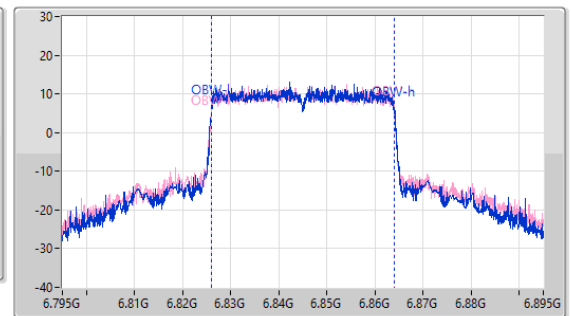
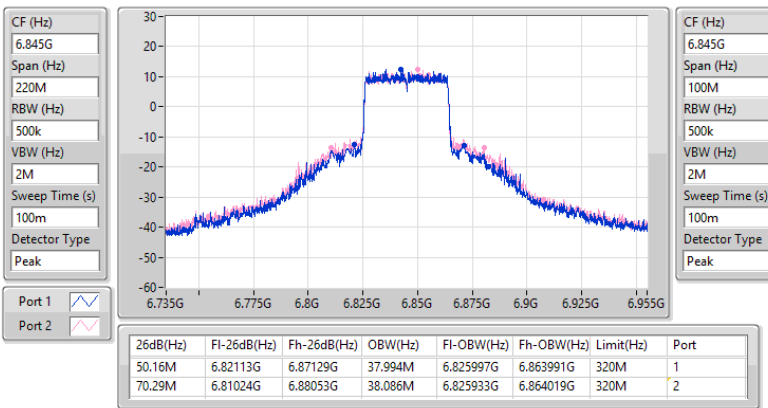


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
5985MHz

19/12/2024

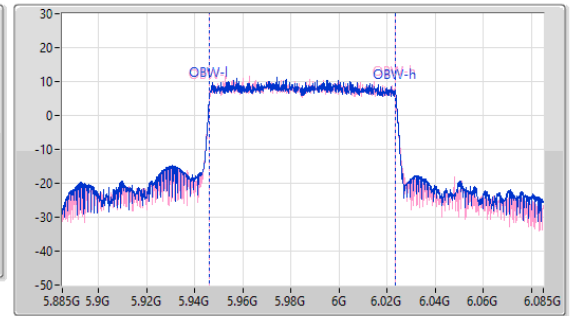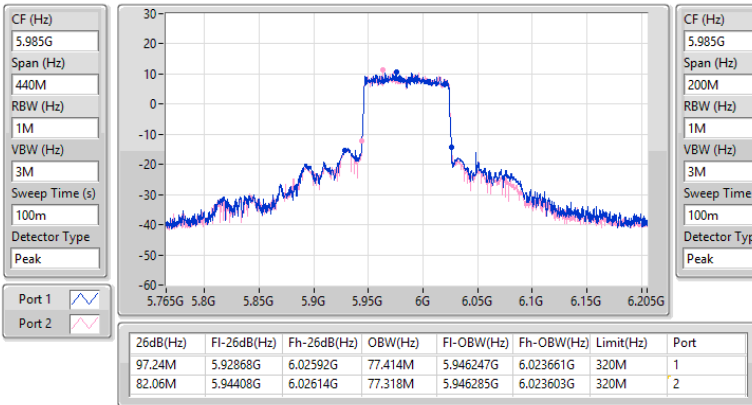

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6225MHz

19/12/2024

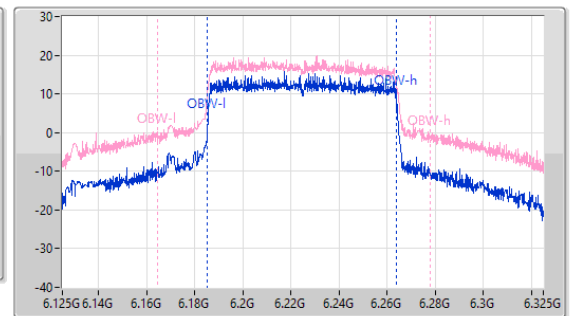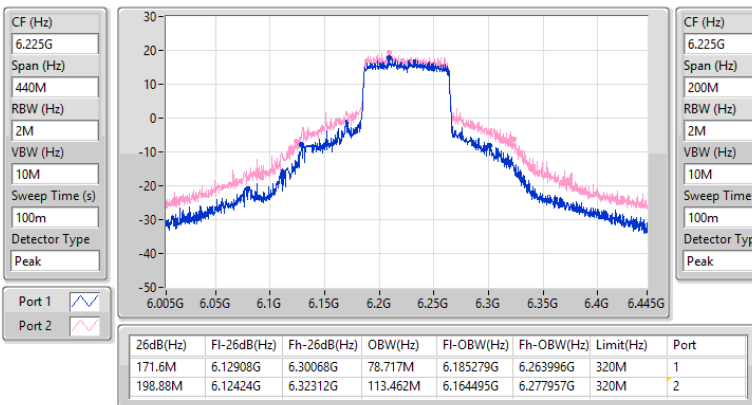


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6385MHz

19/12/2024

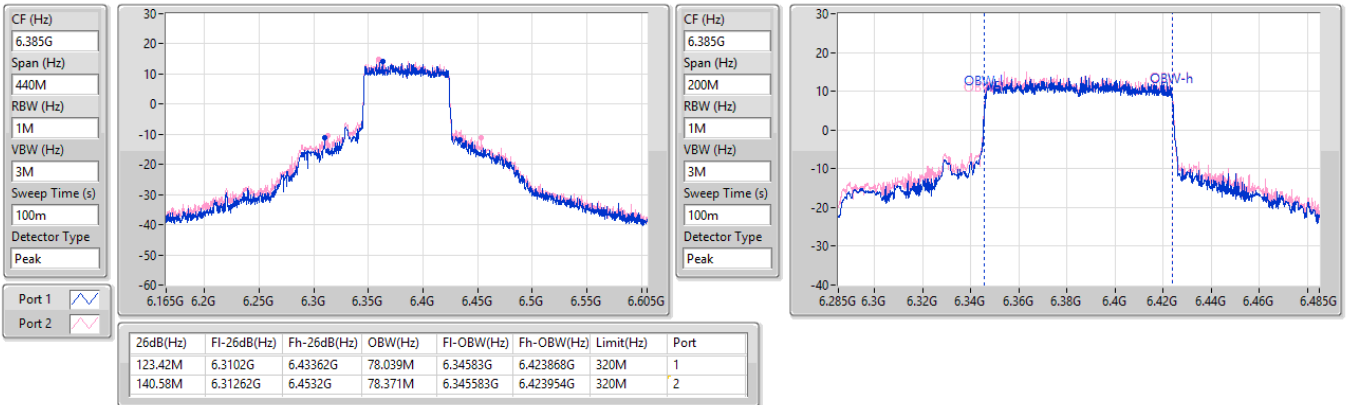

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6625MHz

19/12/2024

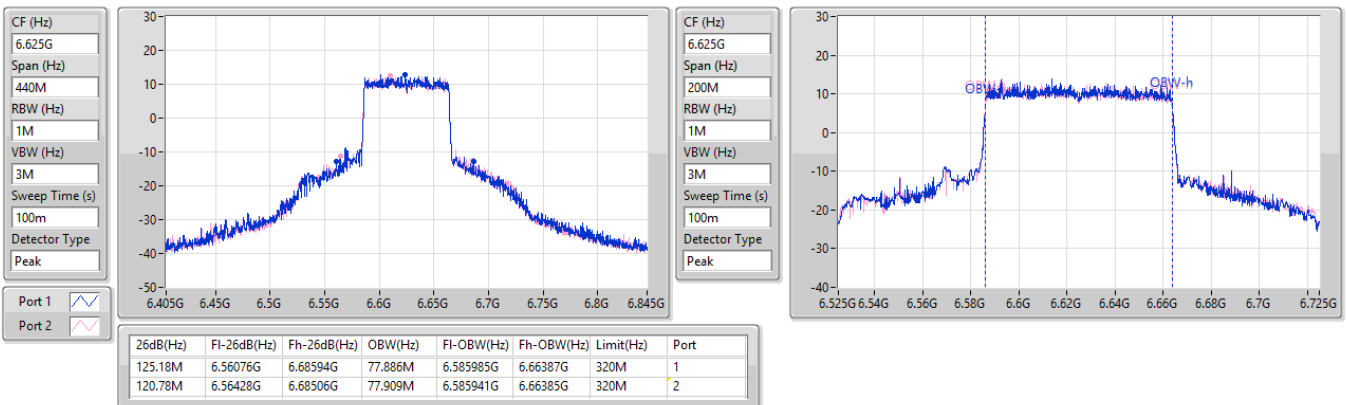


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6705MHz

19/12/2024

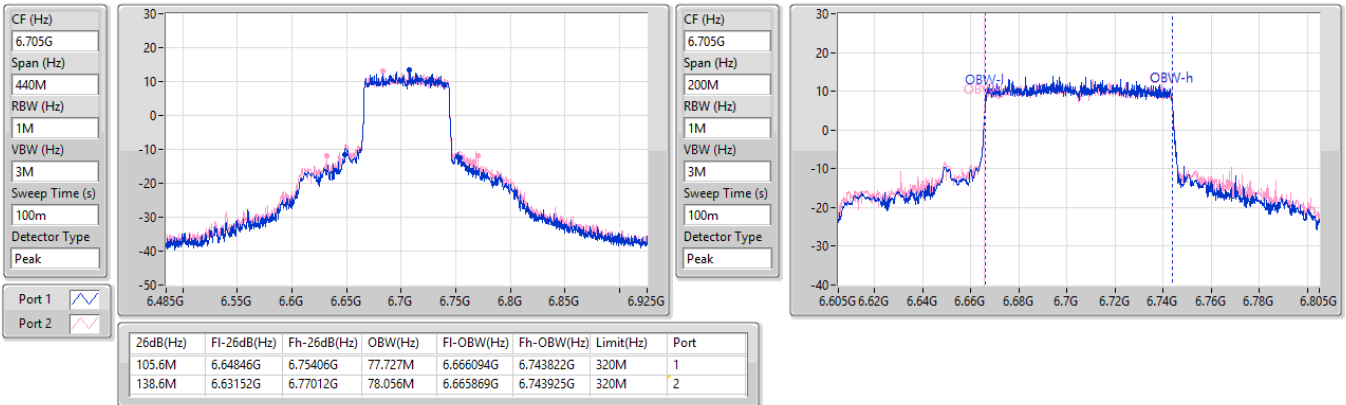
6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX
EBW
6785MHz

19/12/2024


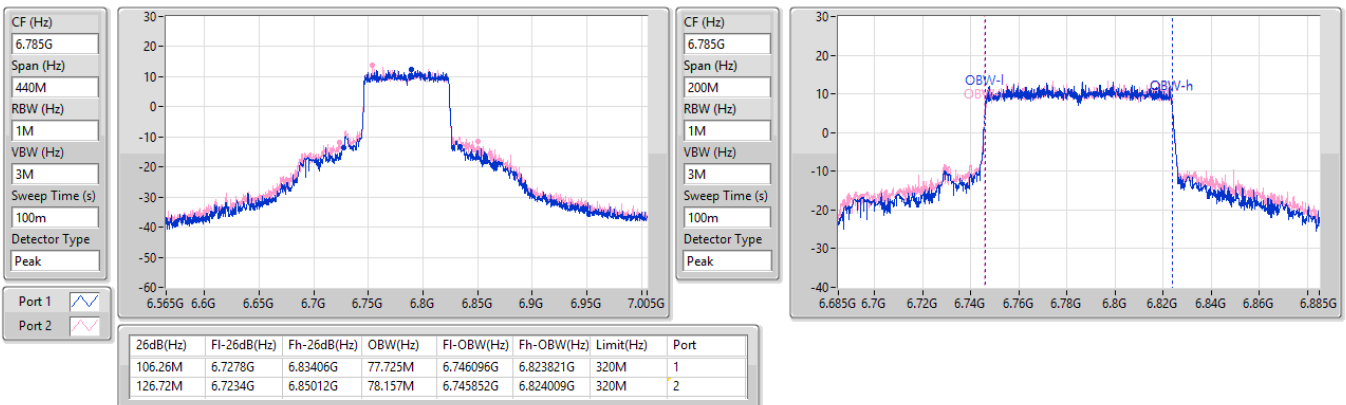


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6025MHz

19/12/2024

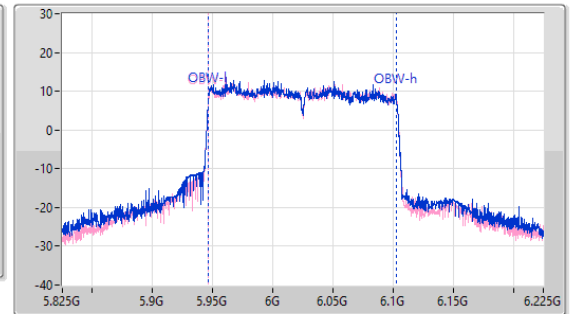
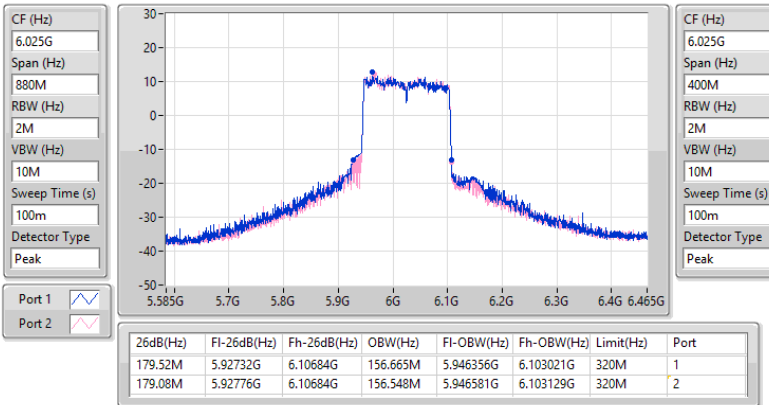


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6185MHz

19/12/2024

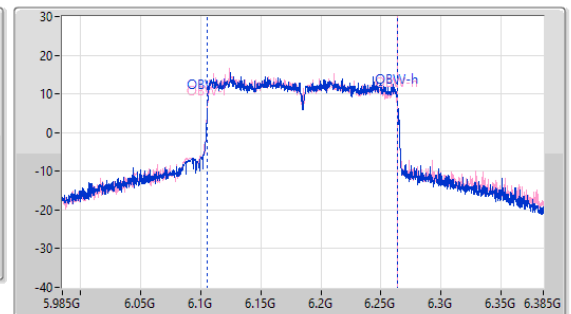
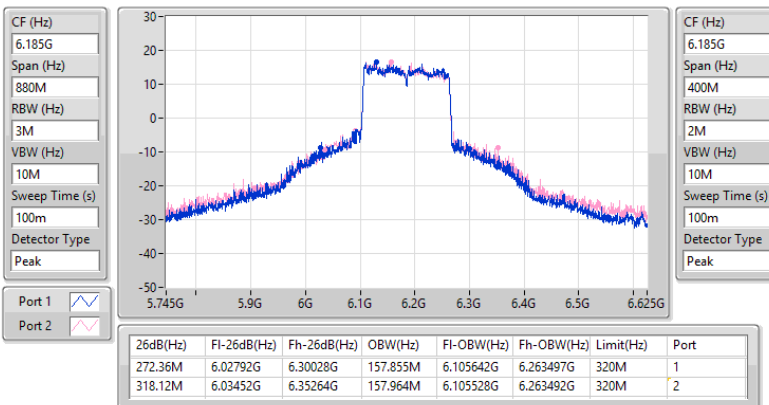


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6345MHz

19/12/2024

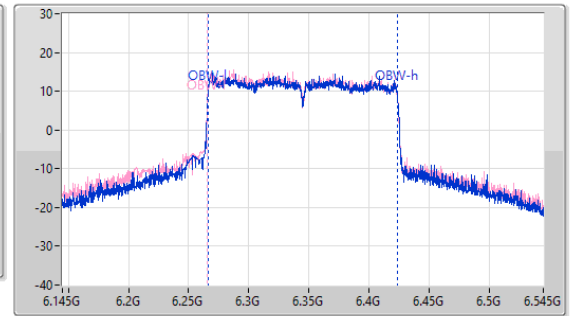
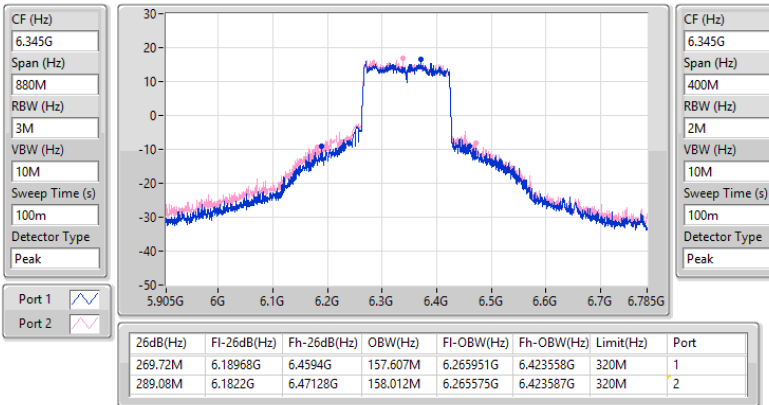


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6665MHz

19/12/2024

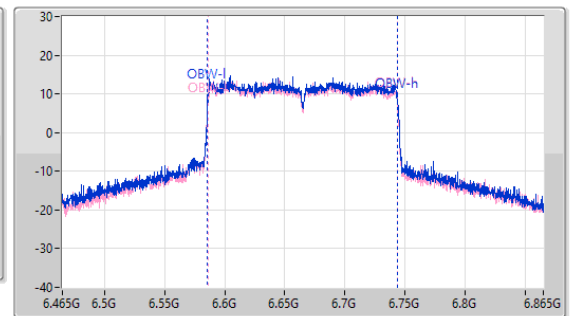
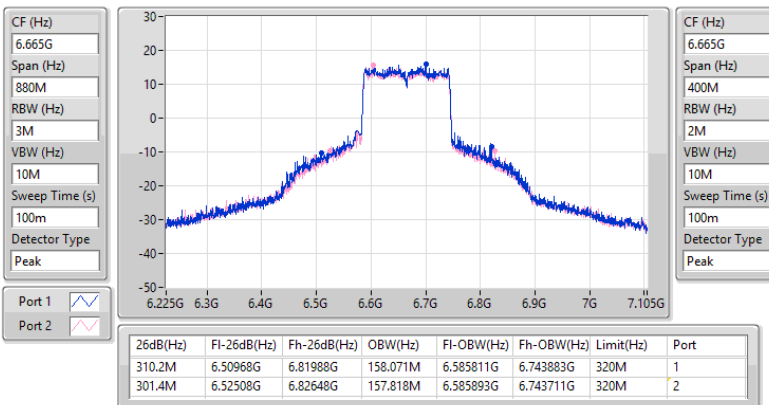


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

EBW

6105MHz

19/12/2024

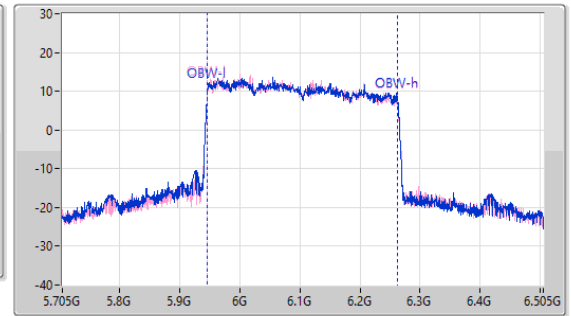
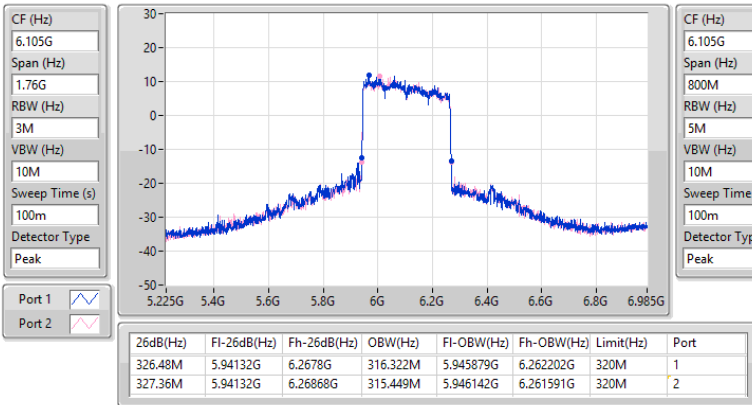


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_2TX

EBW

6265MHz

19/12/2024

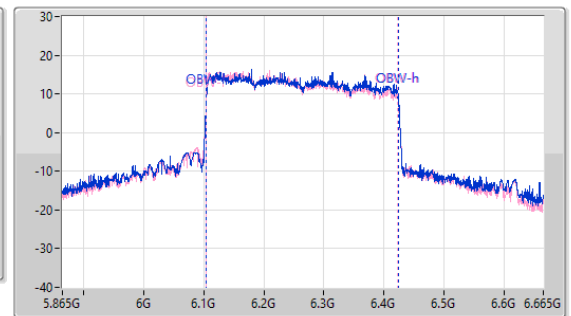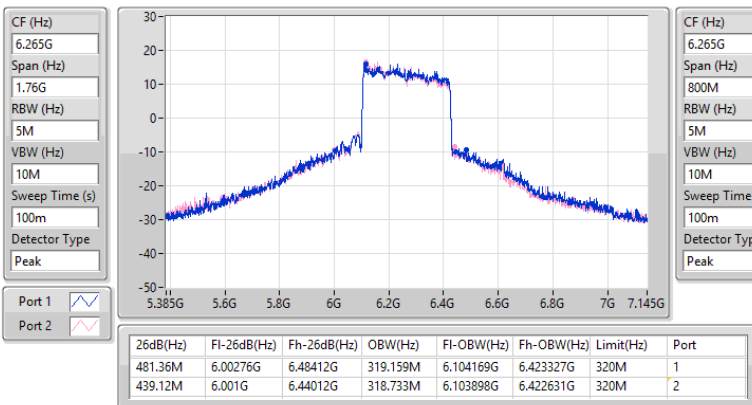

Test Mode: Mode 1

Summary


Mode	EIRP	EIRP
	(dBm)	(W)
5.925-6.425GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	14.55	0.02851
802.11be EHT40_Nss1,(MCS0)_4TX	18.73	0.07464
802.11be EHT80_Nss1,(MCS0)_4TX	21.57	0.14355
802.11be EHT160_Nss1,(MCS0)_4TX	24.02	0.25235
802.11be EHT320_Nss1,(MCS0)_4TX	25.91	0.38994
6.425-6.525GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	15.47	0.03524
802.11be EHT40_Nss1,(MCS0)_4TX	19.28	0.08472
802.11be EHT80_Nss1,(MCS0)_4TX	20.77	0.11940
802.11be EHT160_Nss1,(MCS0)_4TX	23.47	0.22233
802.11be EHT320_Nss1,(MCS0)_4TX	26.13	0.41020
6.525-6.875GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	15.31	0.03396
802.11be EHT40_Nss1,(MCS0)_4TX	19.31	0.08531
802.11be EHT80_Nss1,(MCS0)_4TX	21.68	0.14723
802.11be EHT160_Nss1,(MCS0)_4TX	23.71	0.23496
802.11be EHT320_Nss1,(MCS0)_4TX	26.84	0.48306
6.875-7.125GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	15.49	0.03540
802.11be EHT40_Nss1,(MCS0)_4TX	19.63	0.09183
802.11be EHT80_Nss1,(MCS0)_4TX	21.92	0.15560
802.11be EHT160_Nss1,(MCS0)_4TX	24.91	0.30974

Result


Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-
5955MHz	Pass	13.64	30.00
6195MHz	Pass	14.55	30.00
6415MHz	Pass	14.05	30.00
6435MHz	Pass	15.47	30.00
6475MHz	Pass	14.40	30.00
6515MHz	Pass	14.12	30.00
6535MHz	Pass	13.80	30.00
6695MHz	Pass	15.31	30.00
6875MHz	Pass	14.67	30.00
6895MHz	Pass	15.41	30.00
6995MHz	Pass	15.49	30.00
7095MHz	Pass	14.92	30.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-
5965MHz	Pass	16.44	30.00
6205MHz	Pass	17.39	30.00
6405MHz	Pass	18.73	30.00
6445MHz	Pass	19.28	30.00
6485MHz	Pass	17.16	30.00
6525MHz	Pass	17.97	30.00
6565MHz	Pass	17.61	30.00
6685MHz	Pass	18.53	30.00
6885MHz	Pass	19.31	30.00
6925MHz	Pass	19.63	30.00
7005MHz	Pass	18.78	30.00
7085MHz	Pass	17.53	30.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-
5985MHz	Pass	20.50	30.00
6225MHz	Pass	21.57	30.00
6385MHz	Pass	20.68	30.00
6465MHz	Pass	20.77	30.00
6545MHz	Pass	19.65	30.00
6625MHz	Pass	19.86	30.00
6705MHz	Pass	19.43	30.00
6785MHz	Pass	20.49	30.00
6865MHz	Pass	21.68	30.00
6945MHz	Pass	21.75	30.00
7025MHz	Pass	21.92	30.00
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-
6025MHz	Pass	24.02	30.00
6185MHz	Pass	23.37	30.00
6345MHz	Pass	23.08	30.00
6505MHz	Pass	23.47	30.00
6665MHz	Pass	23.38	30.00
6825MHz	Pass	23.71	30.00
6985MHz	Pass	24.91	30.00
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-
6105MHz	Pass	25.58	30.00
6265MHz	Pass	25.91	30.00
6585MHz	Pass	26.13	30.00
6745MHz	Pass	25.76	30.00
6905MHz	Pass	26.84	30.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.


EIRP;Band:6.2G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:5955MHz;TX

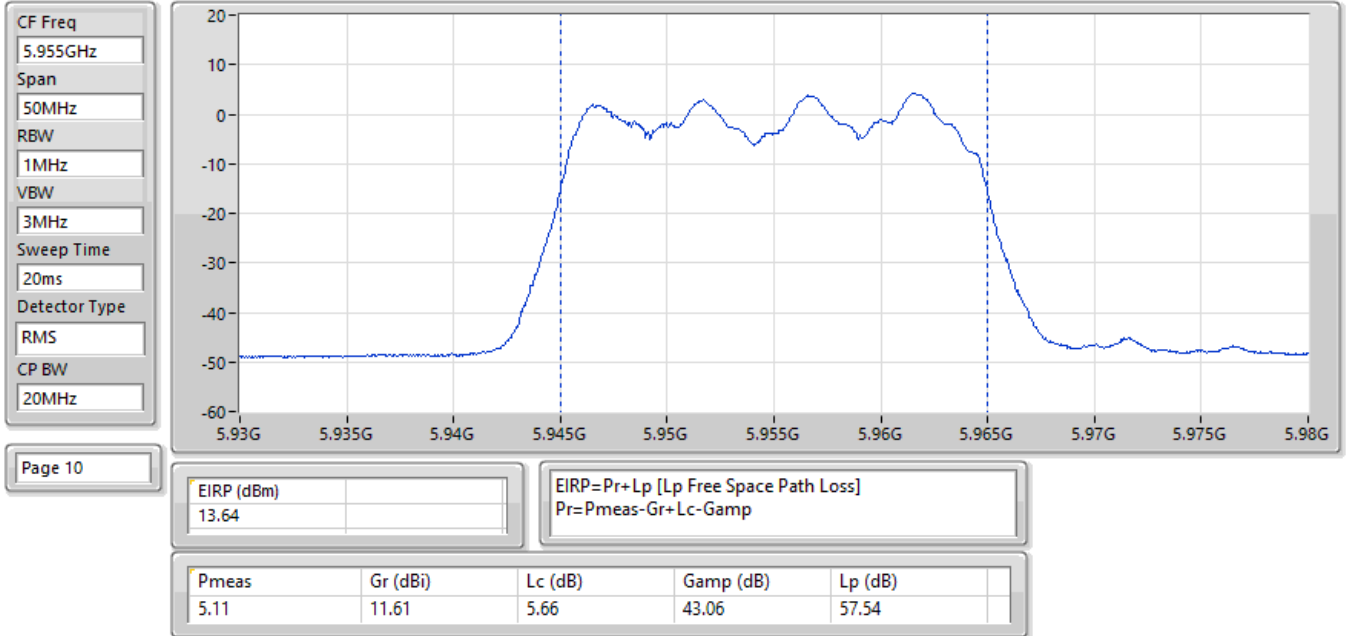


EIRP;Band:6.2G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6195MHz;TX

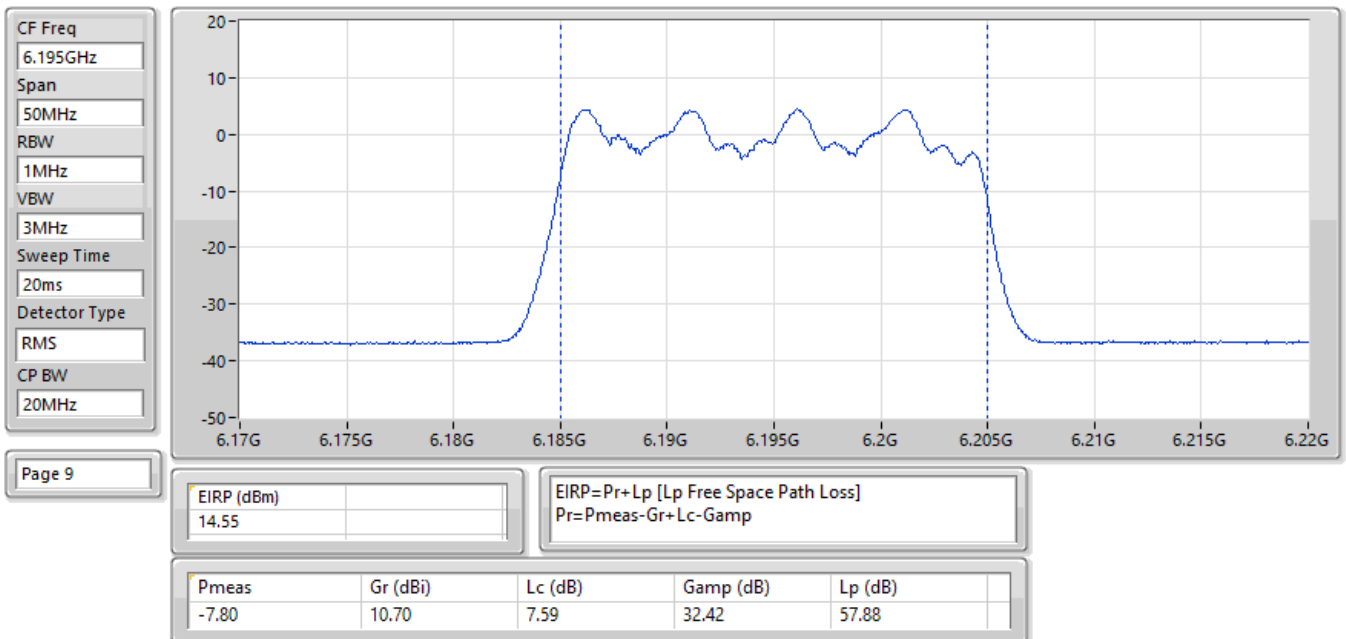


EIRP:Band:6.2G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6415MHz;TX

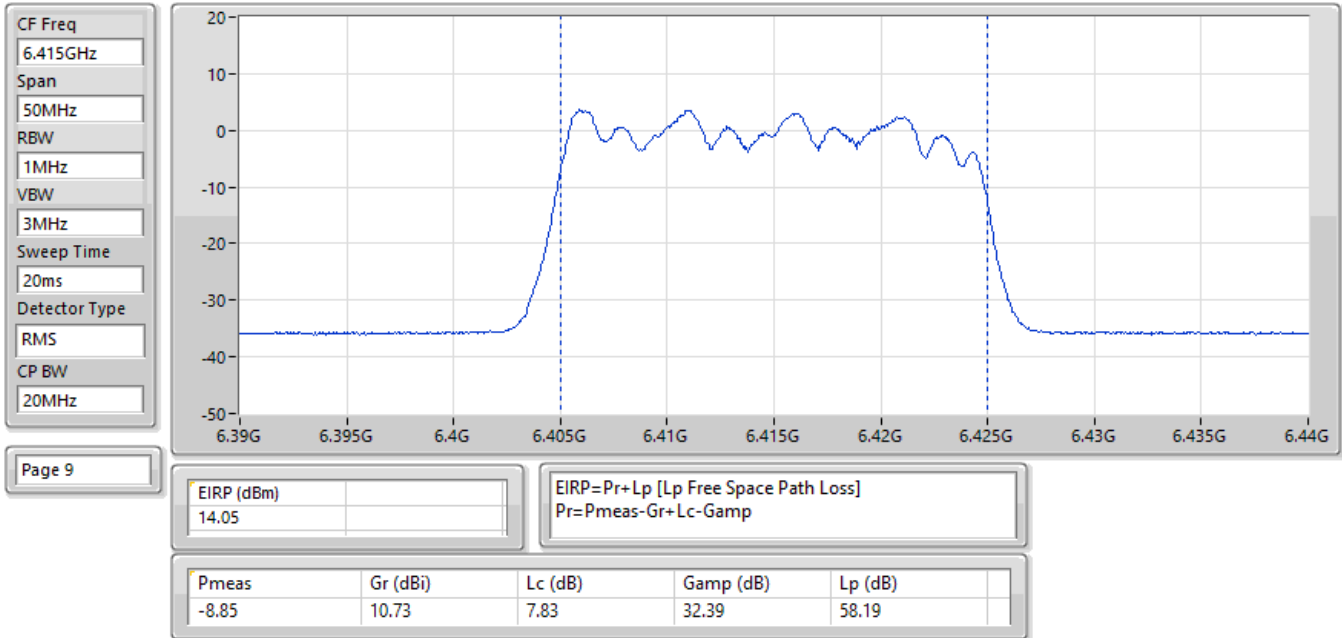


EIRP:Band:6.4G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6435MHz;TX

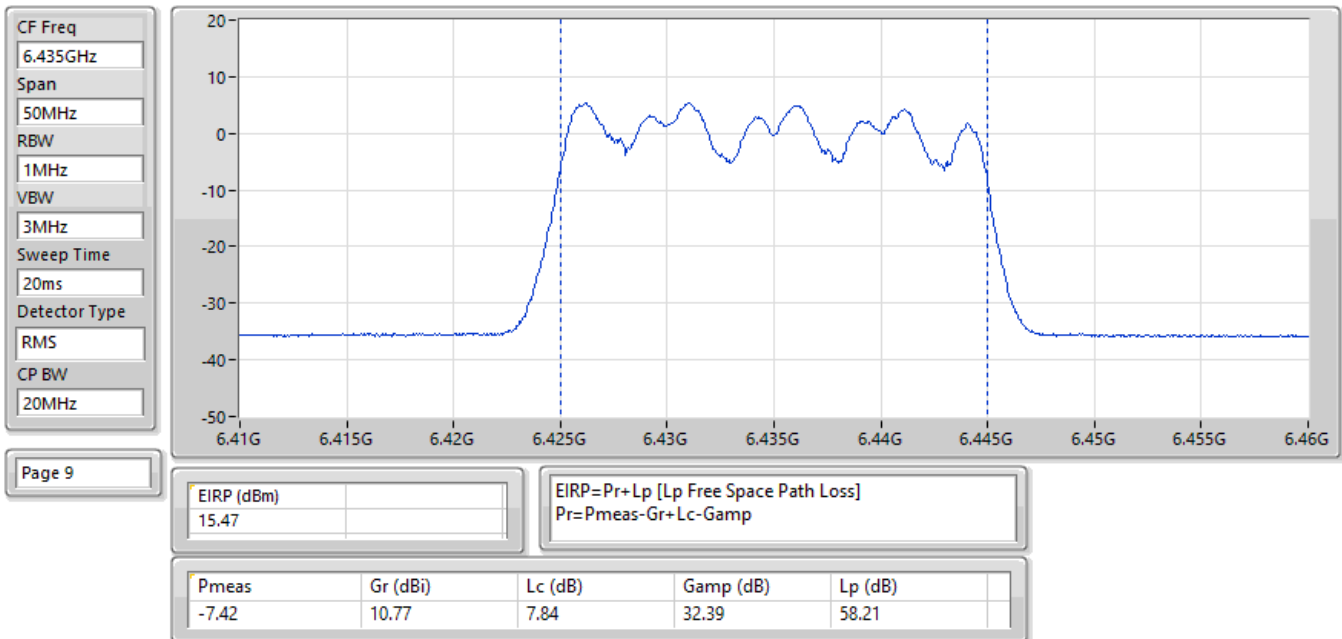


EIRP:Band:6.4G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6475MHz;TX

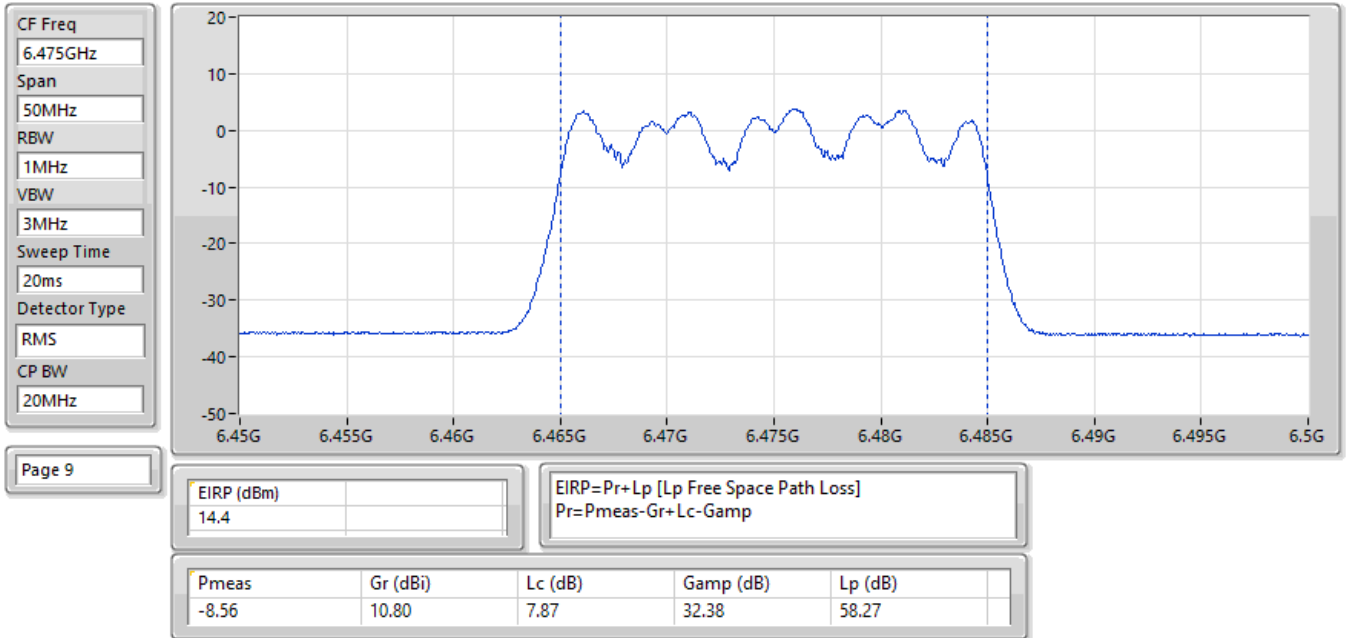


EIRP:Band:6.4G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6515MHz;TX

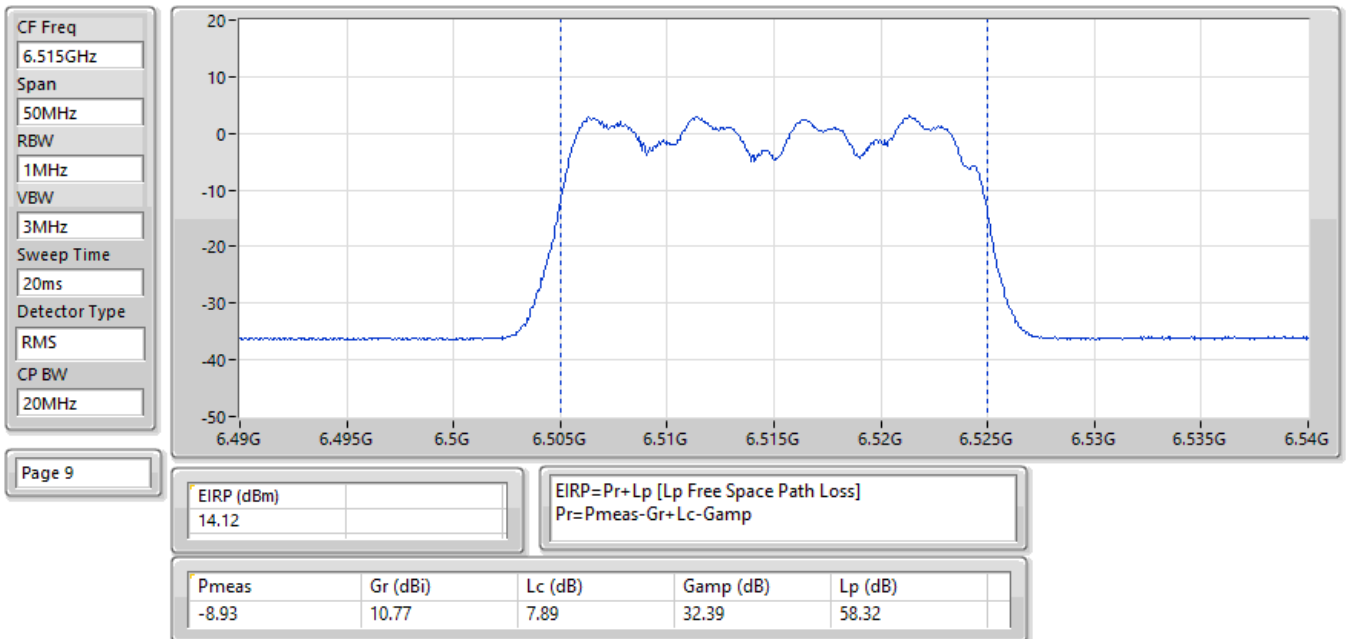


EIRP:Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6535MHz;TX

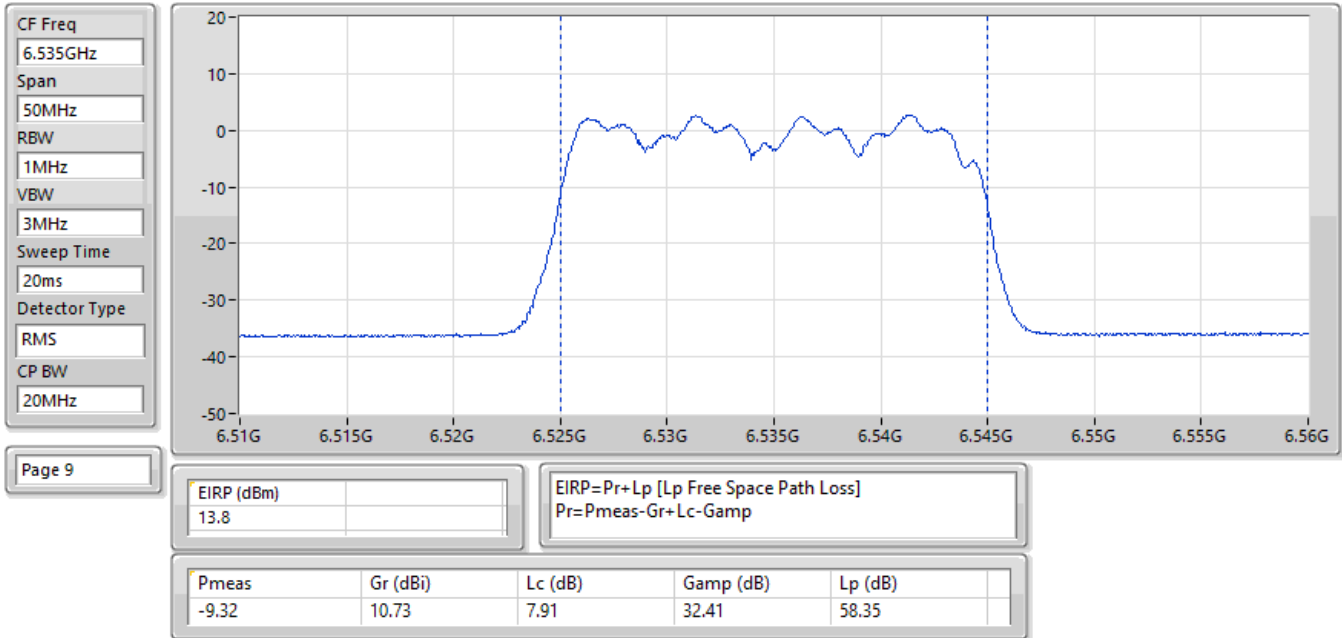


EIRP:Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6695MHz;TX

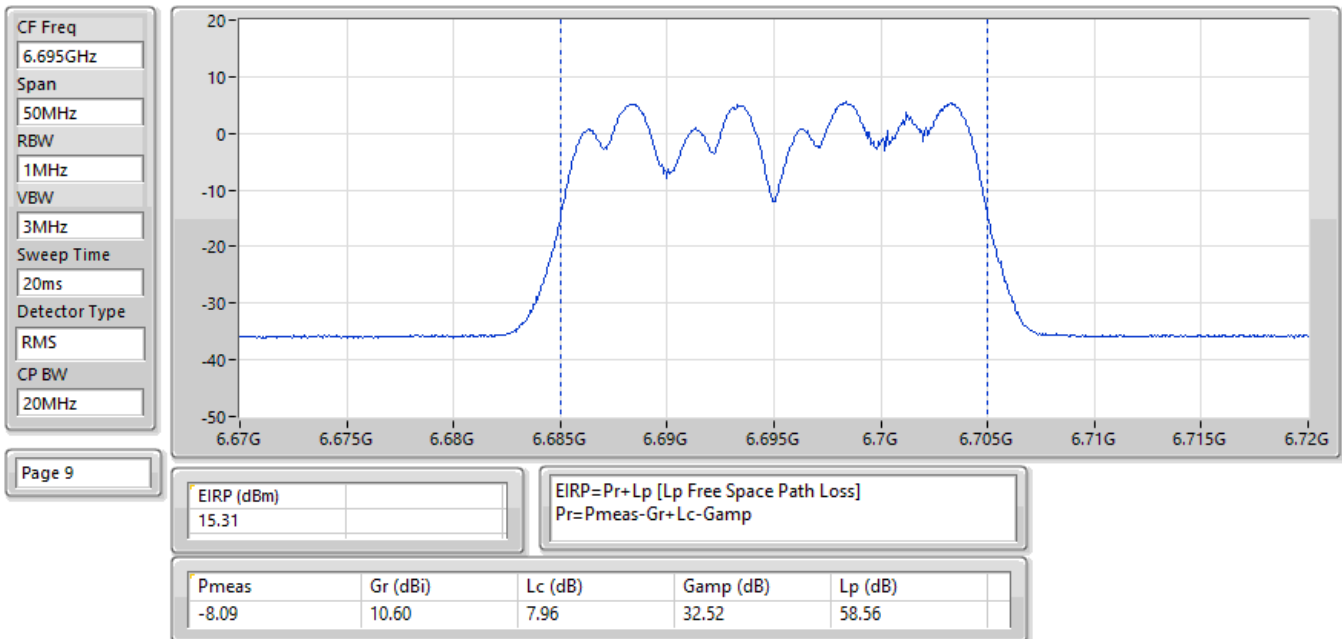


EIRP:Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6875MHz;TX

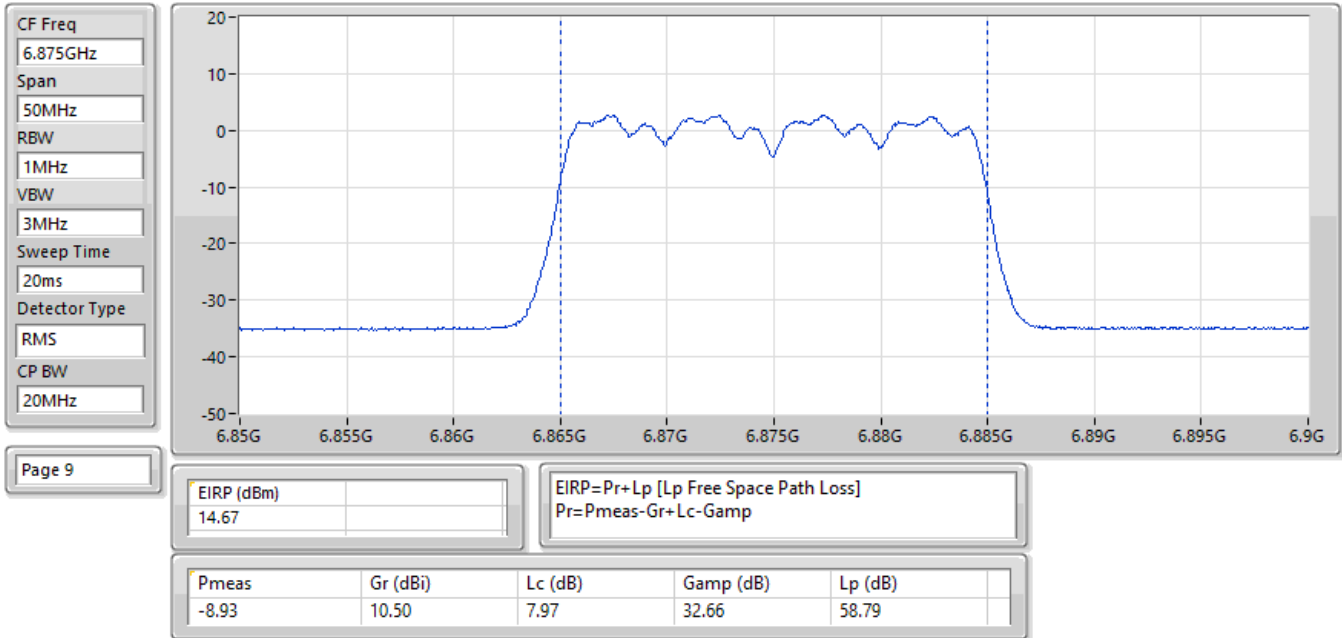


EIRP:Band:7.0G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6895MHz;TX

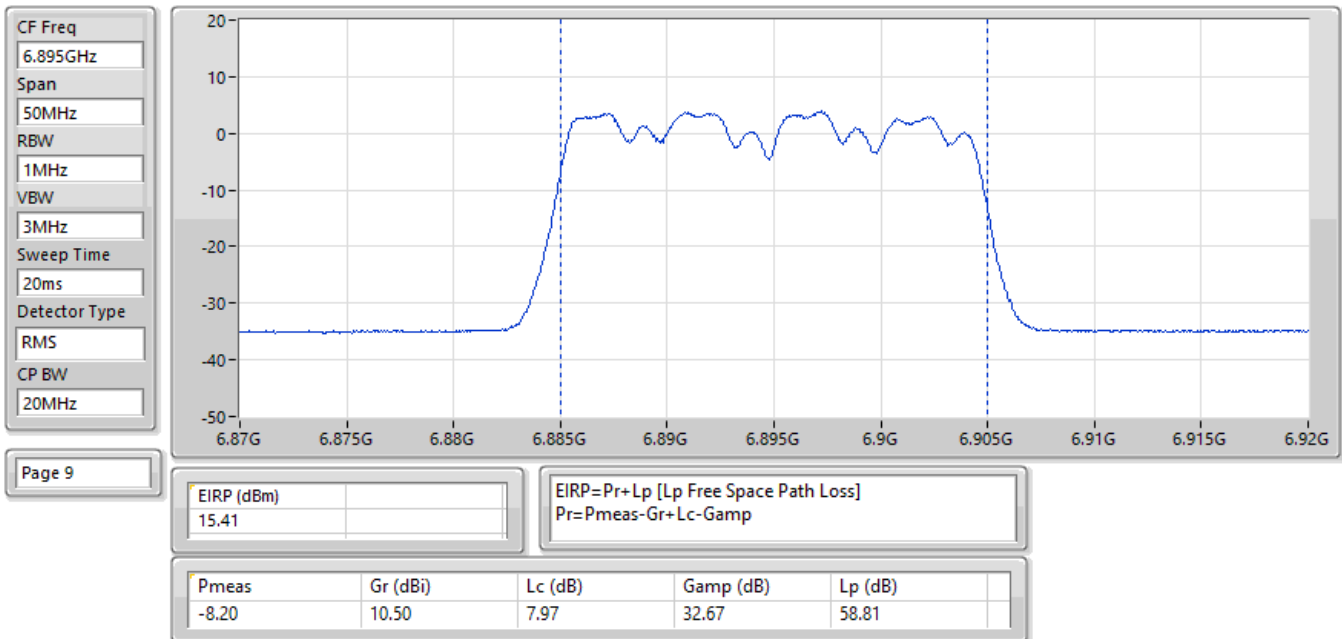


EIRP:Band:7.0G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6995MHz;TX

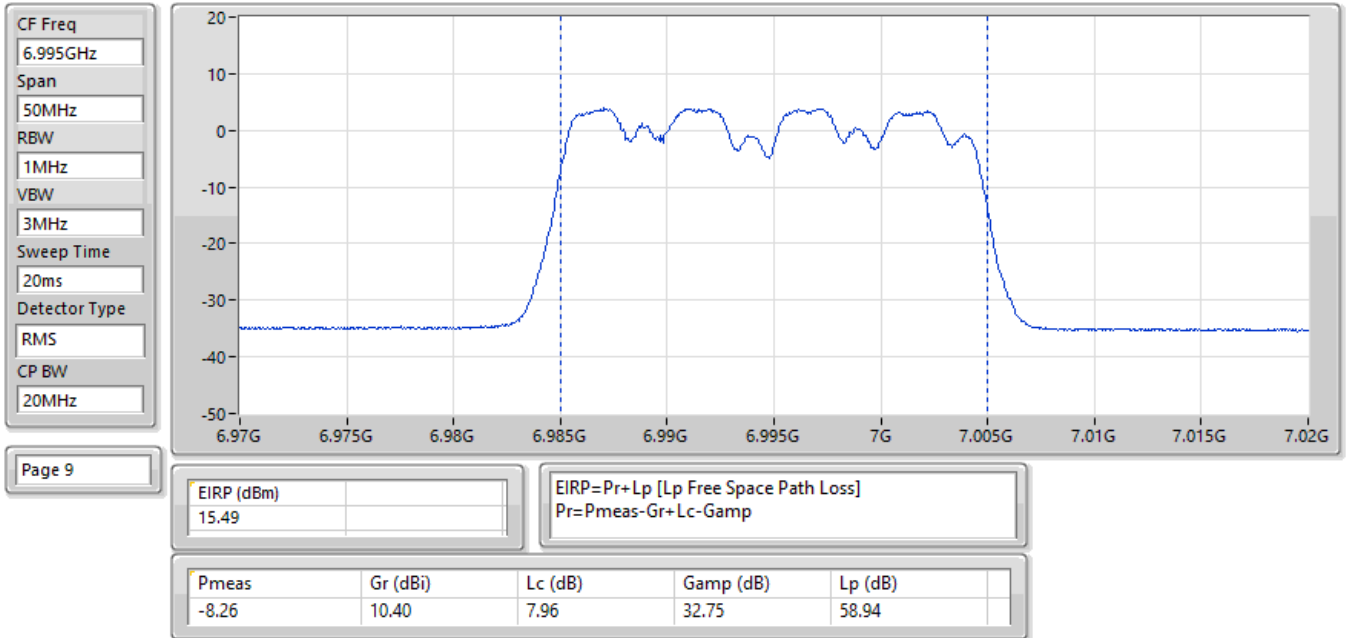


EIRP:Band:7.0G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:7095MHz;TX

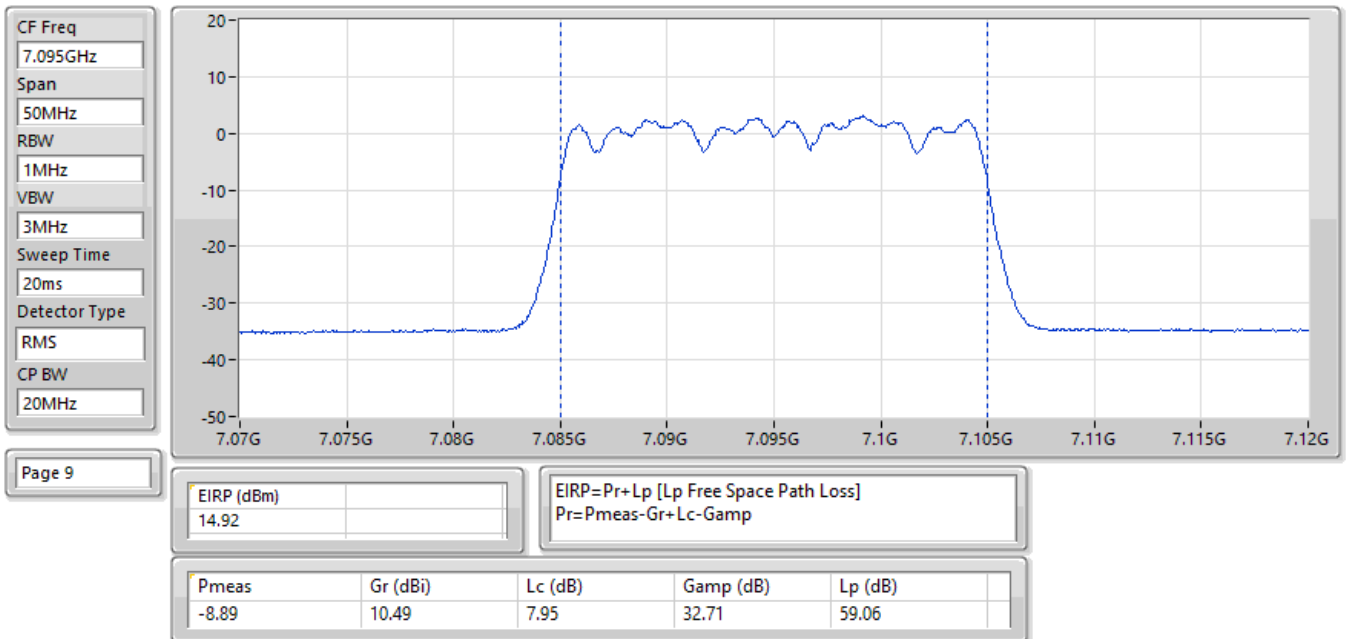


EIRP:Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:5965MHz;TX

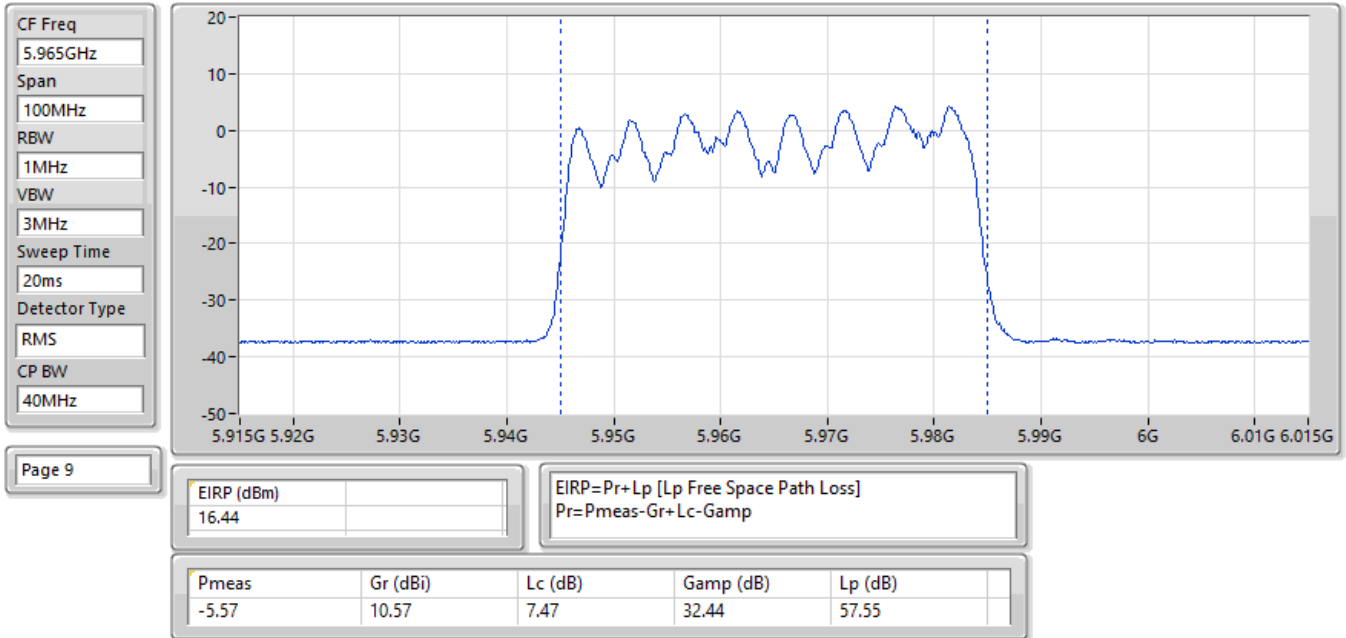


EIRP:Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6205MHz;TX

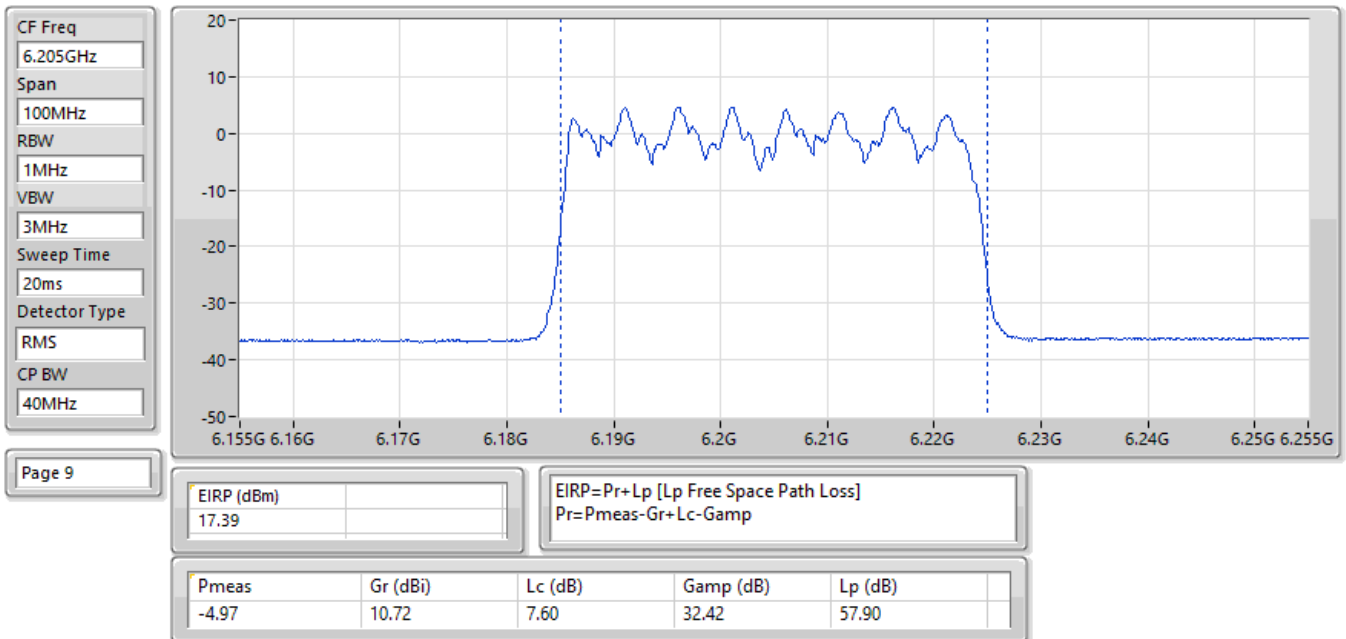


EIRP:Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6405MHz;TX

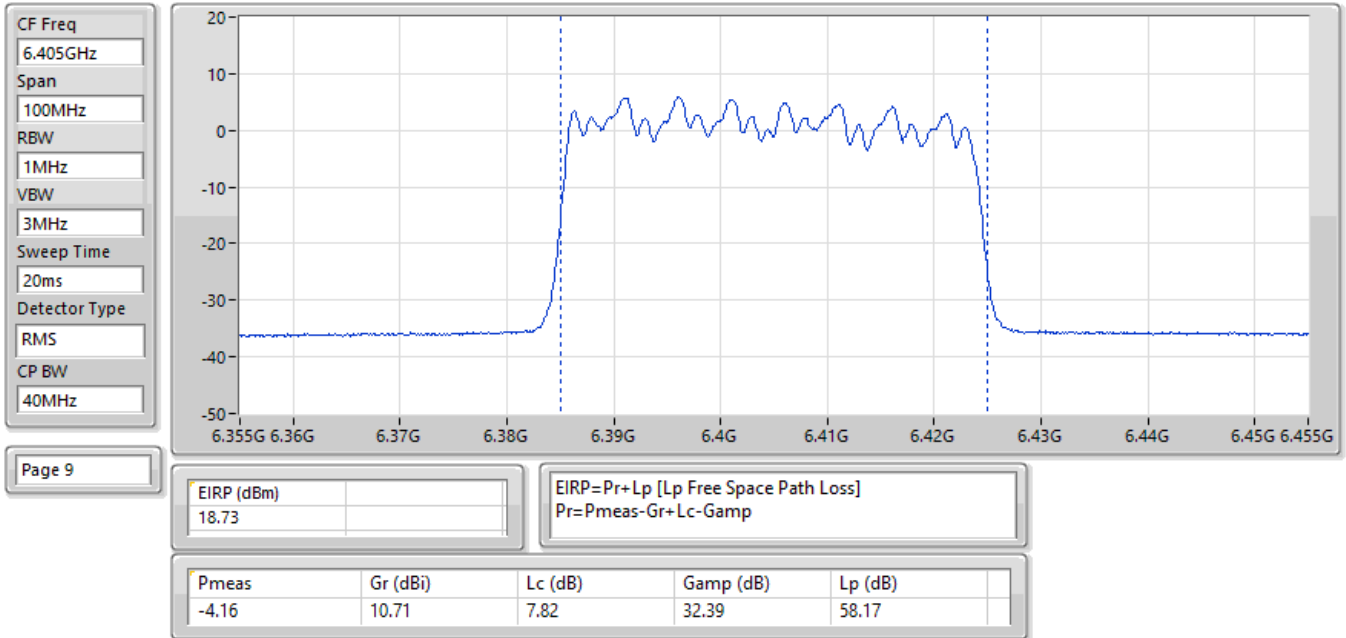


EIRP:Band:6.4G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6445MHz;TX

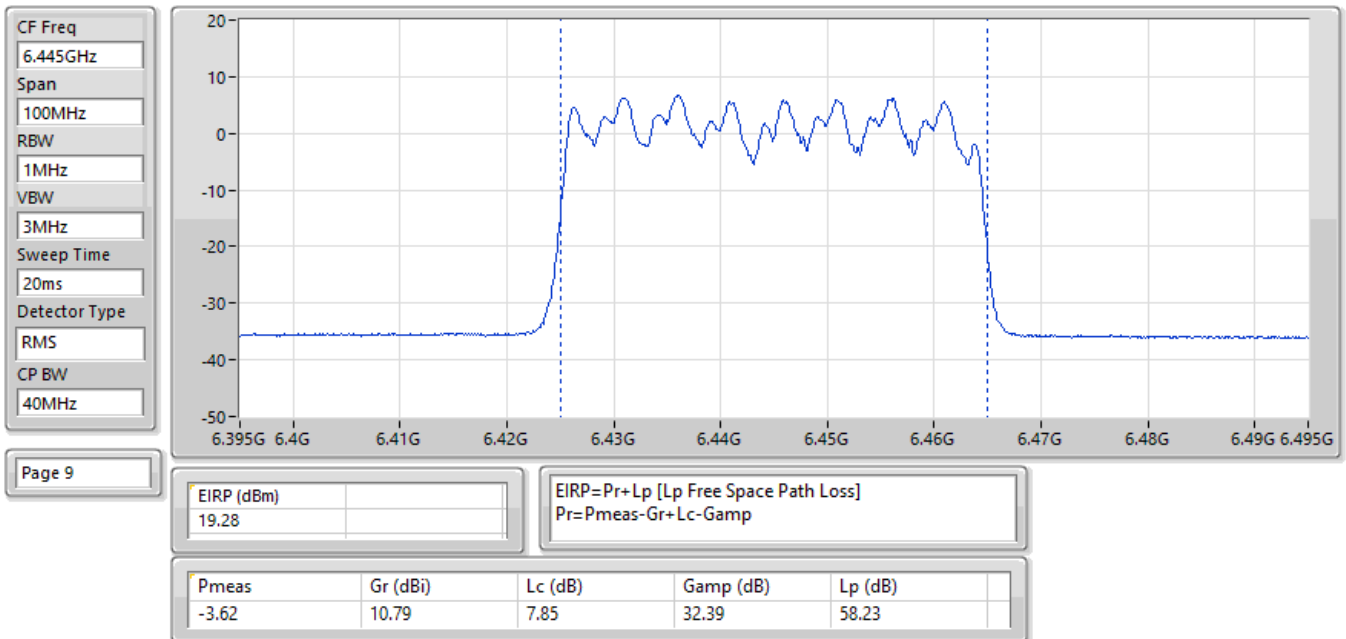


EIRP:Band:6.4G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6485MHz;TX

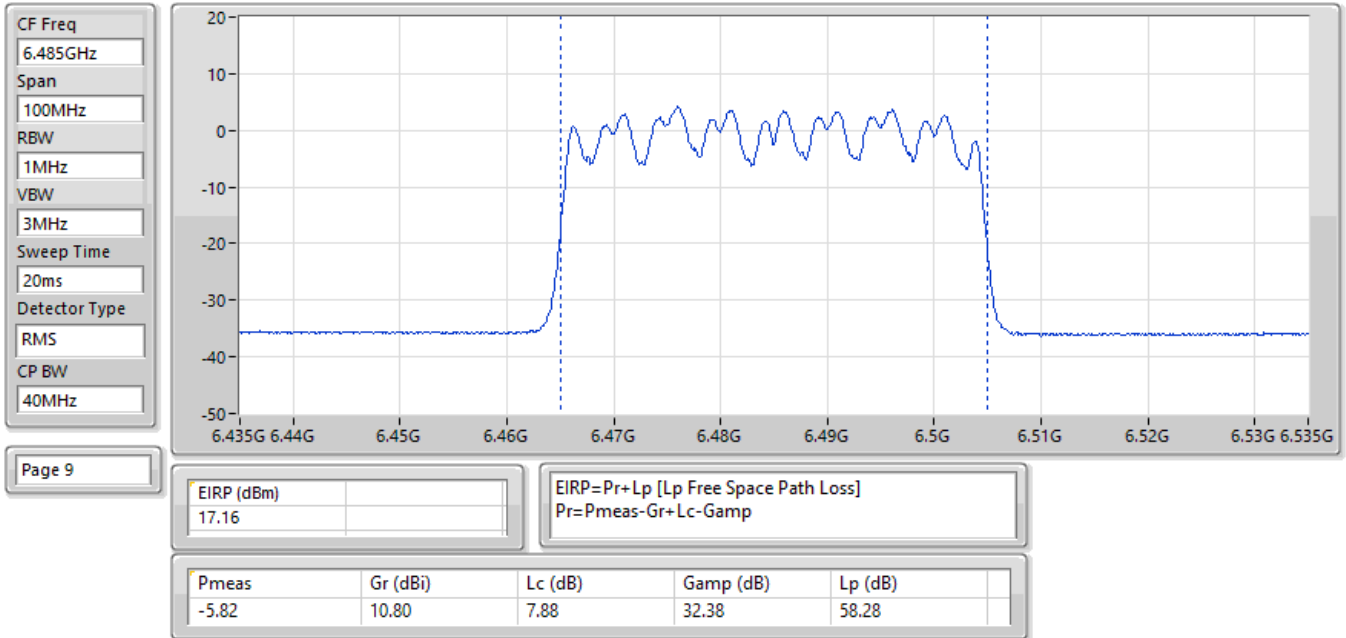


EIRP:Band:6.4G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6525MHz;TX

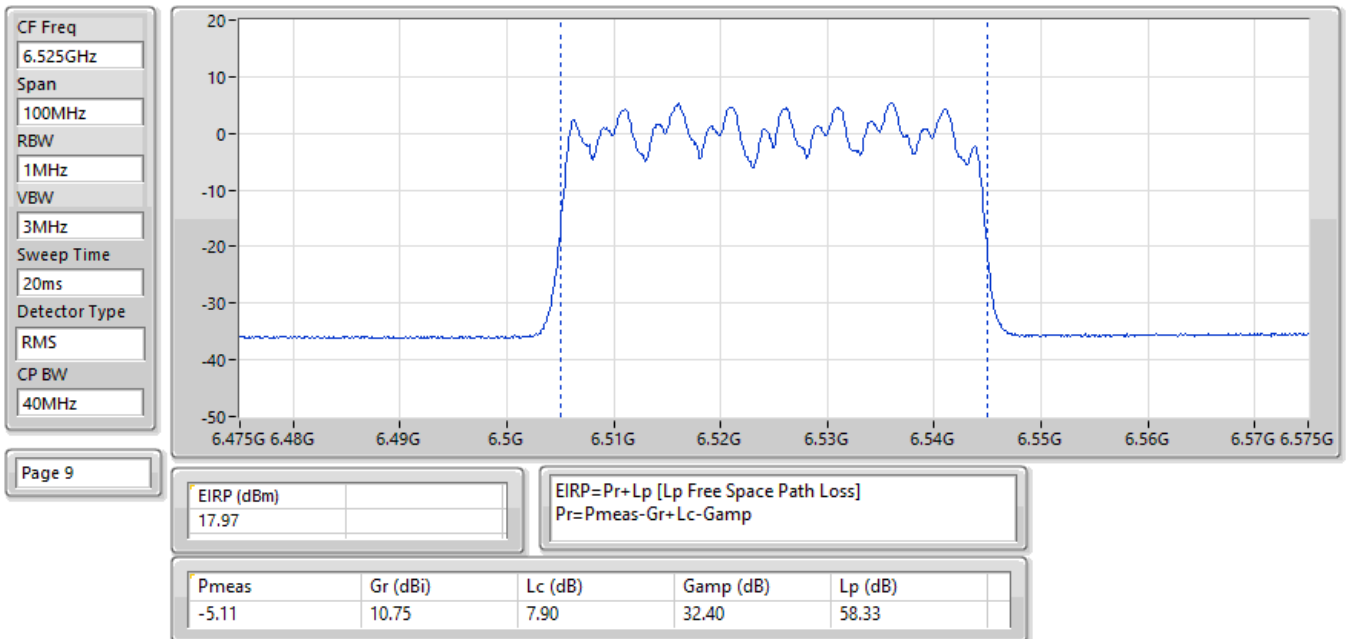


EIRP:Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6565MHz;TX

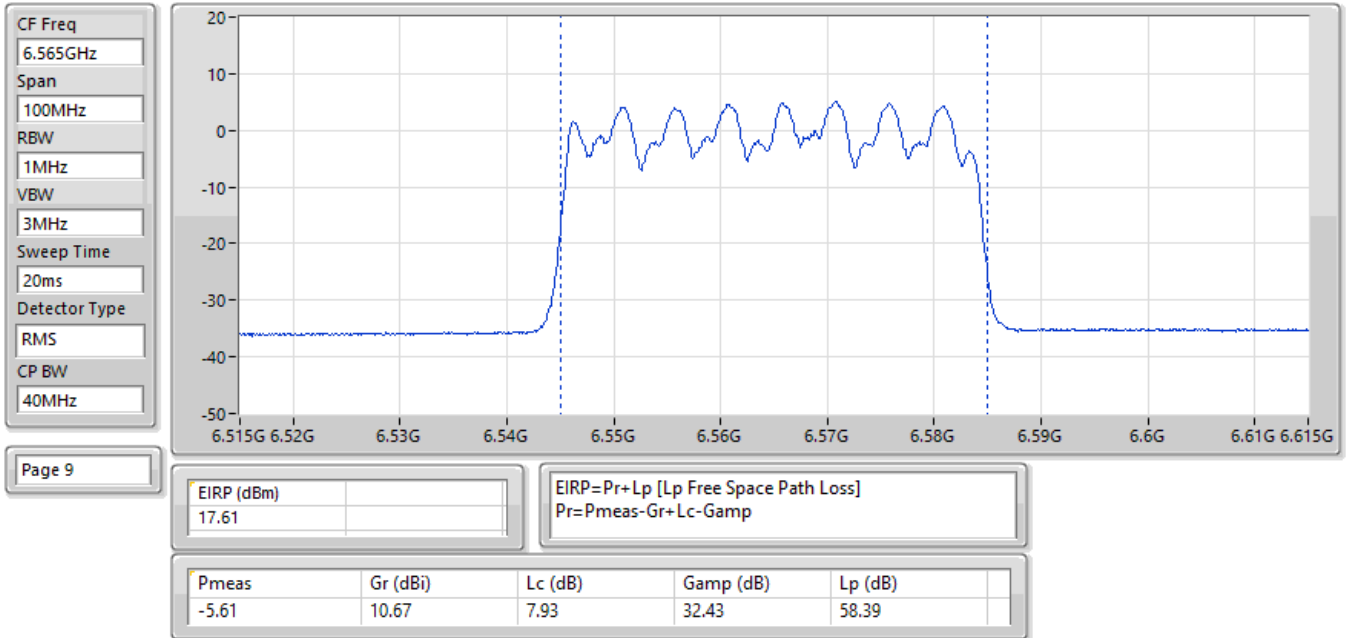


EIRP:Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6685MHz;TX

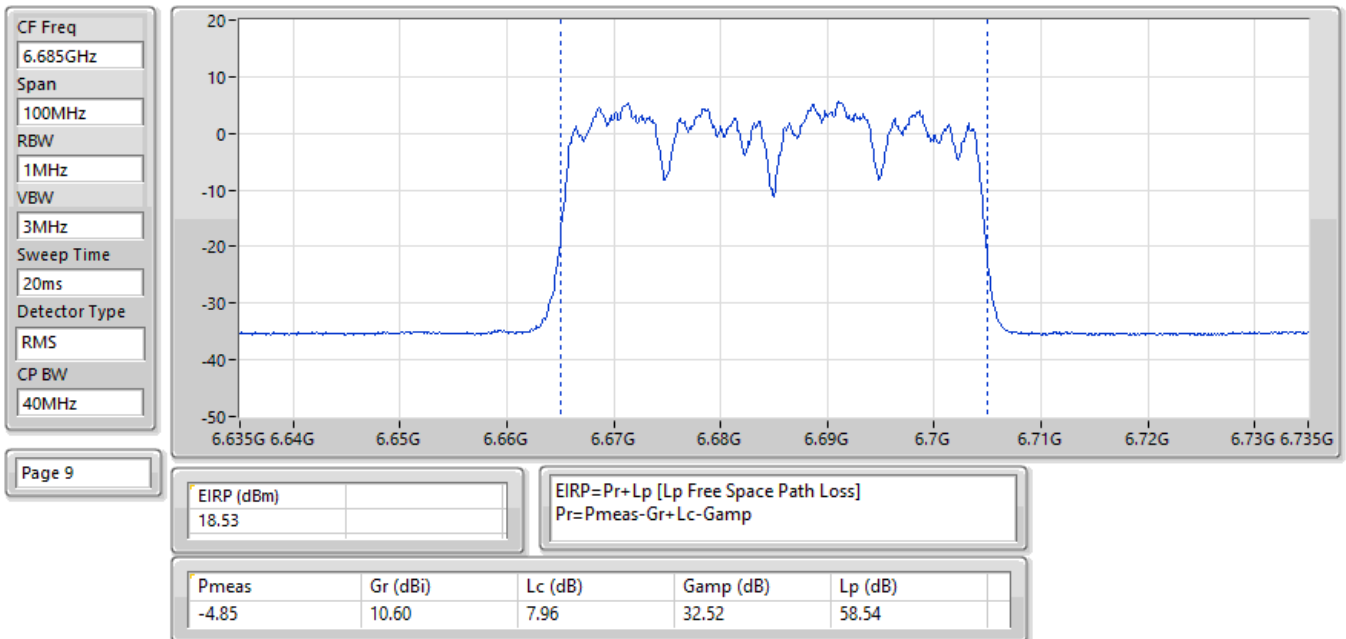


EIRP:Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6885MHz;TX

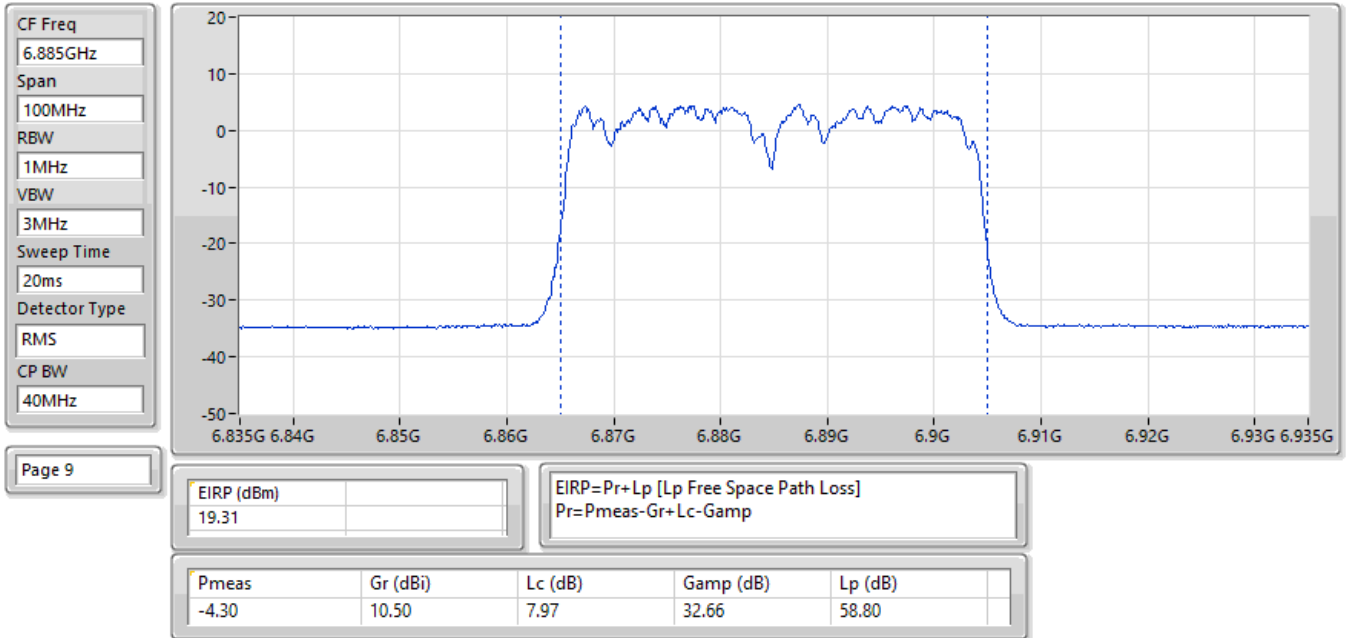


EIRP:Band:7.0G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6925MHz;TX

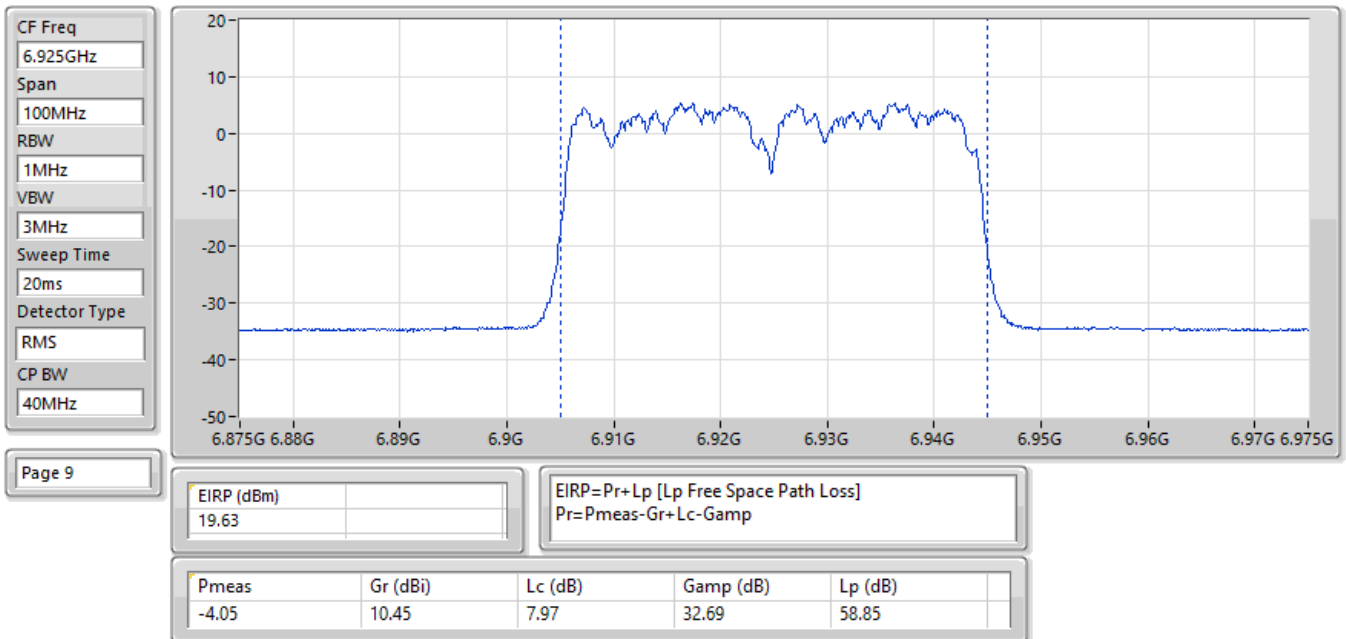


EIRP:Band:7.0G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:7005MHz;TX

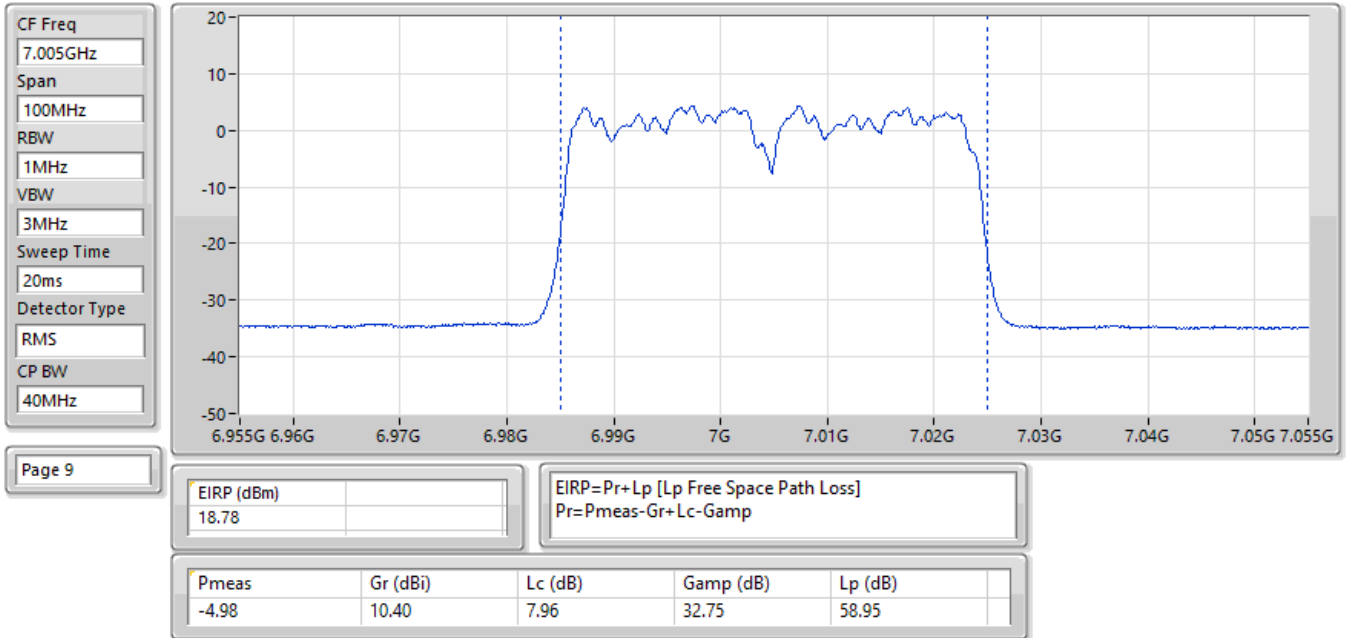


EIRP:Band:7.0G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:7085MHz;TX

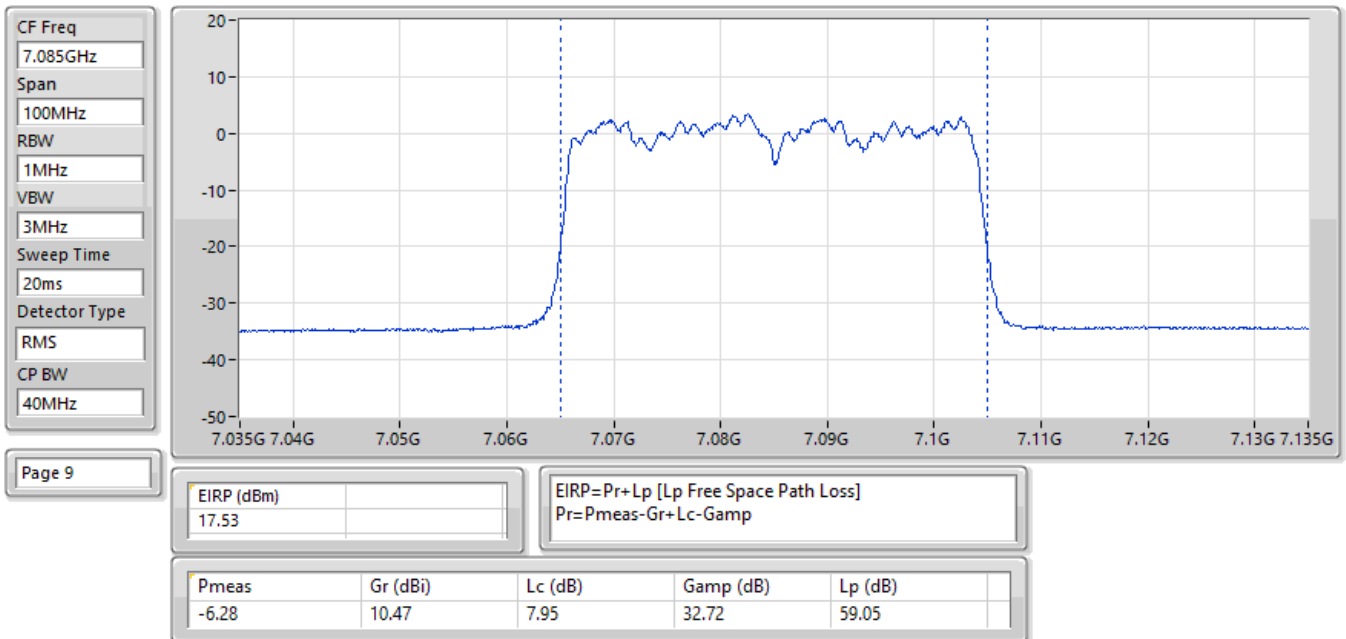


EIRP:Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:5985MHz;TX

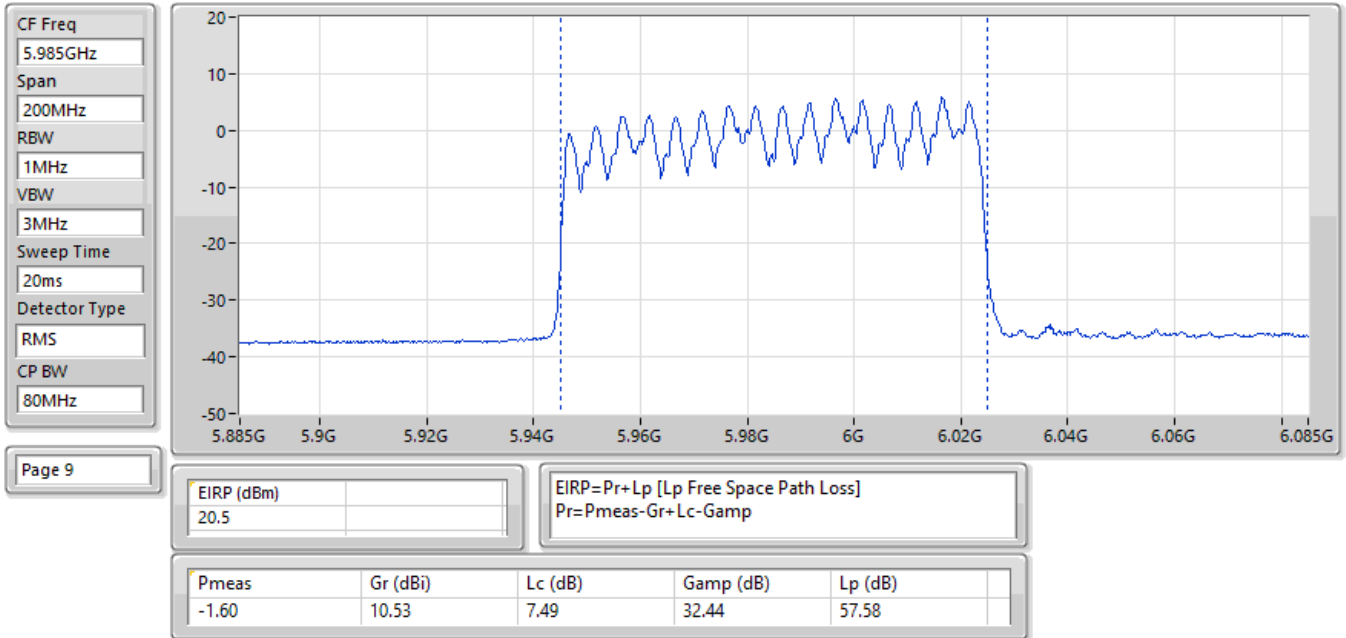


EIRP:Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6225MHz;TX

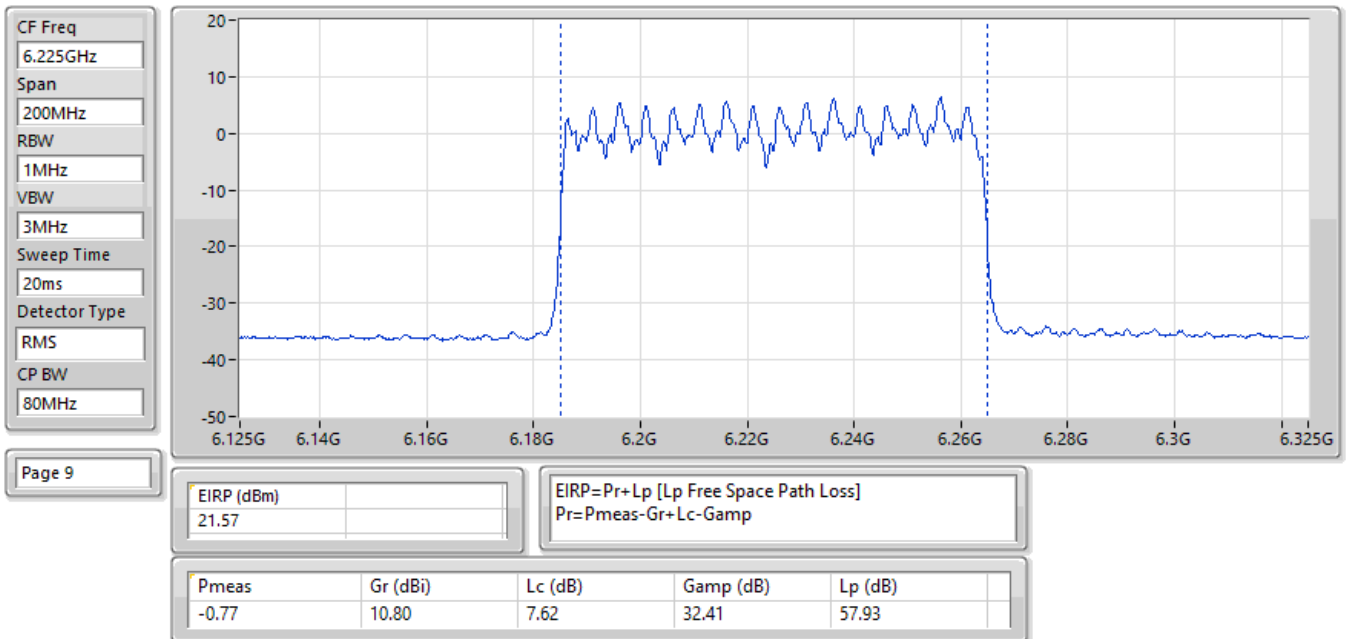


EIRP:Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6385MHz;TX

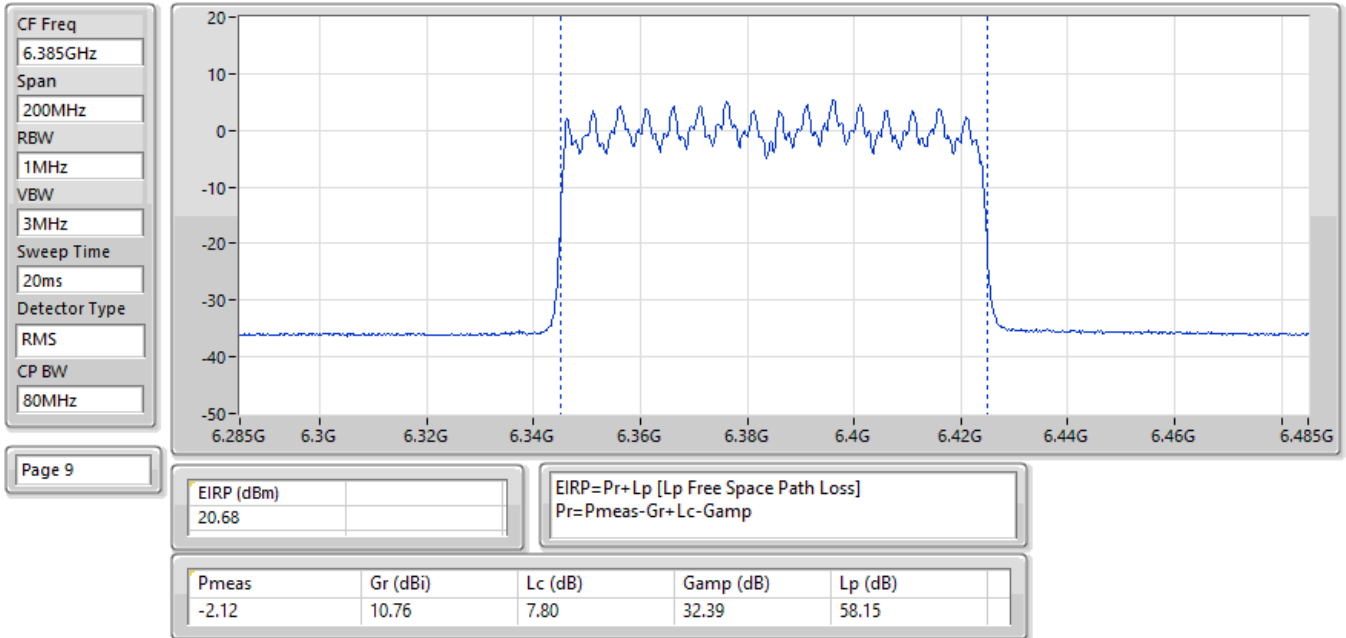


EIRP:Band:6.4G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6465MHz;TX

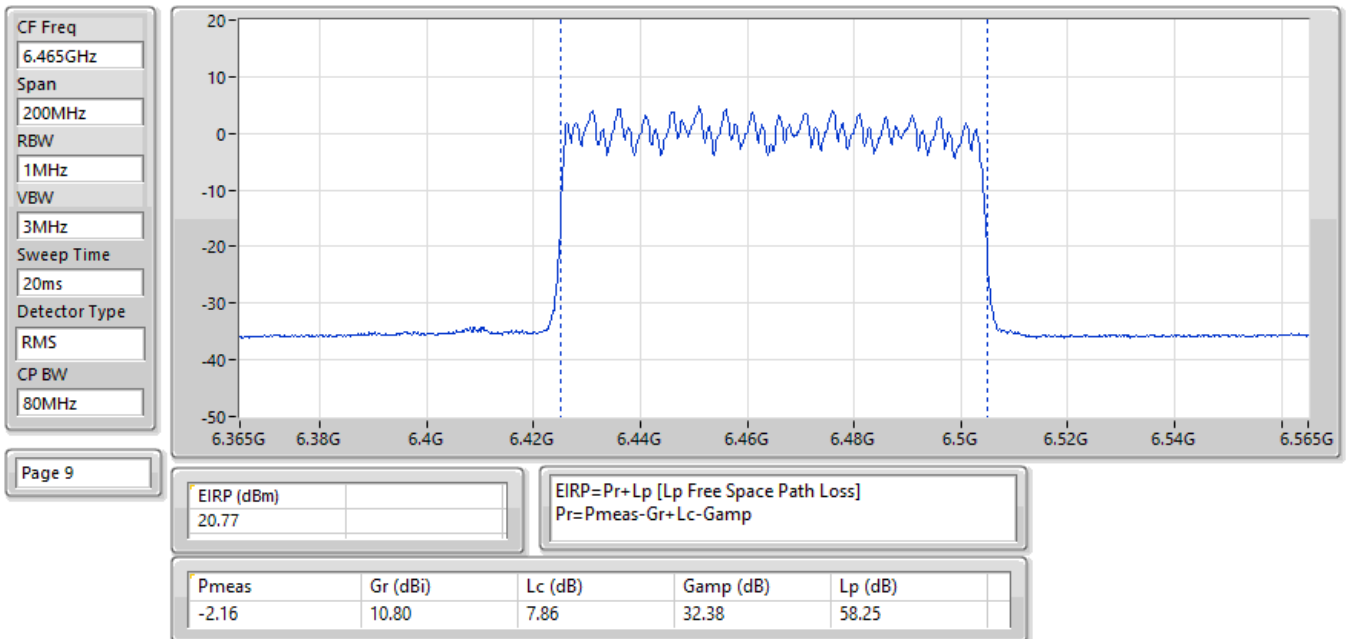


EIRP:Band:6.4G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6545MHz;TX

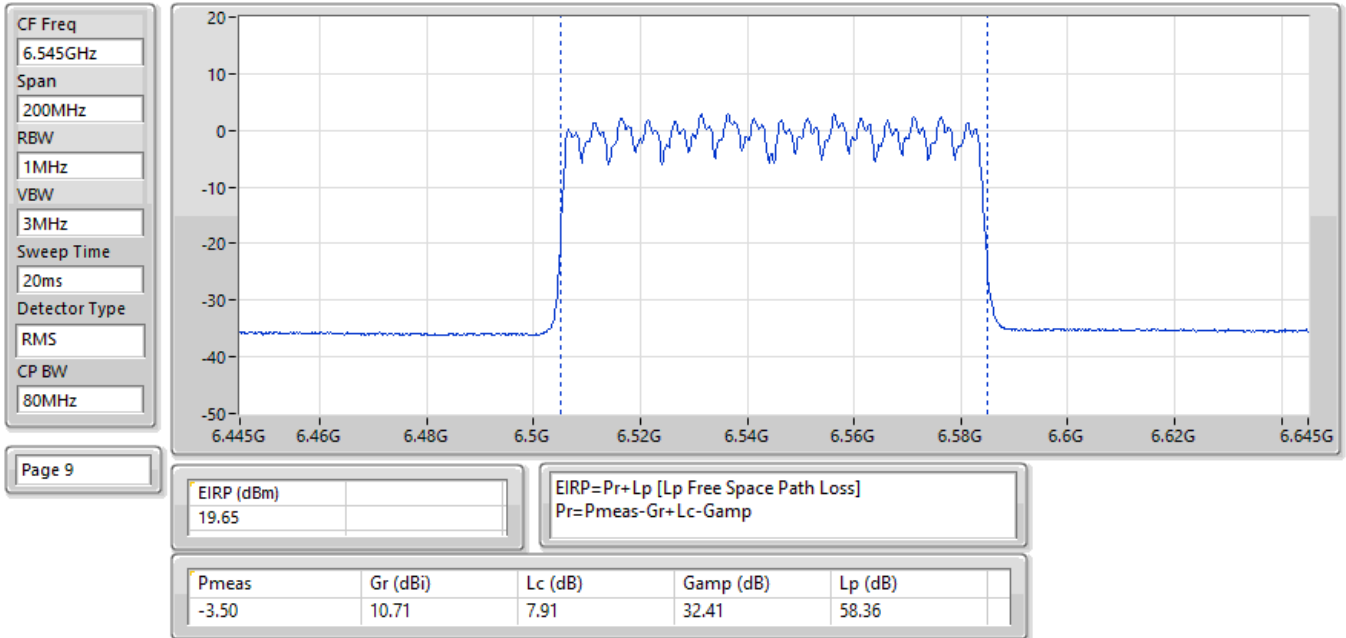


EIRP:Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6625MHz;TX

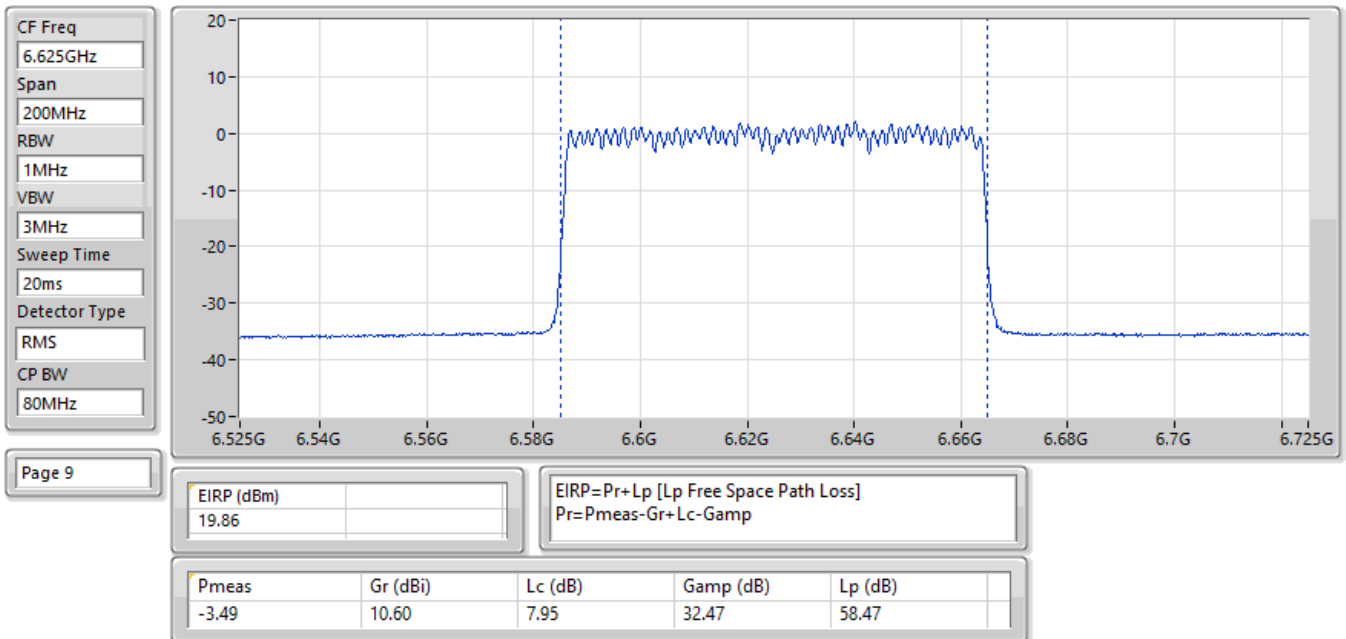


EIRP:Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6705MHz;TX

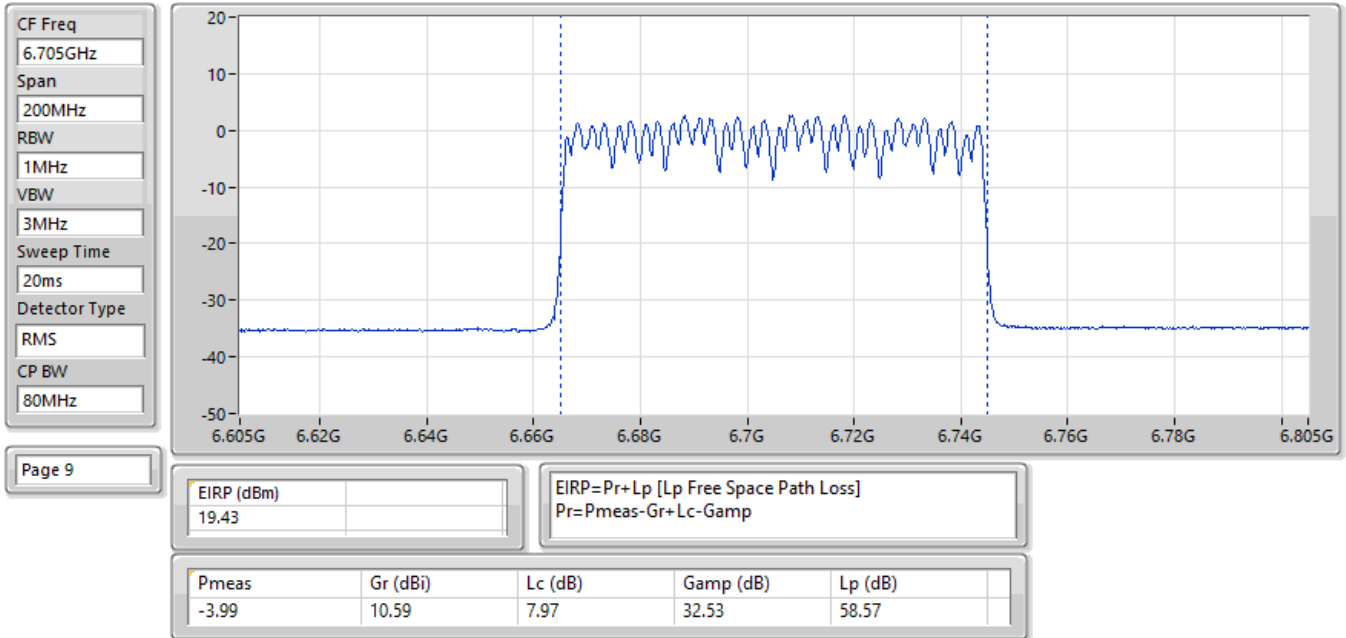


EIRP:Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6785MHz;TX

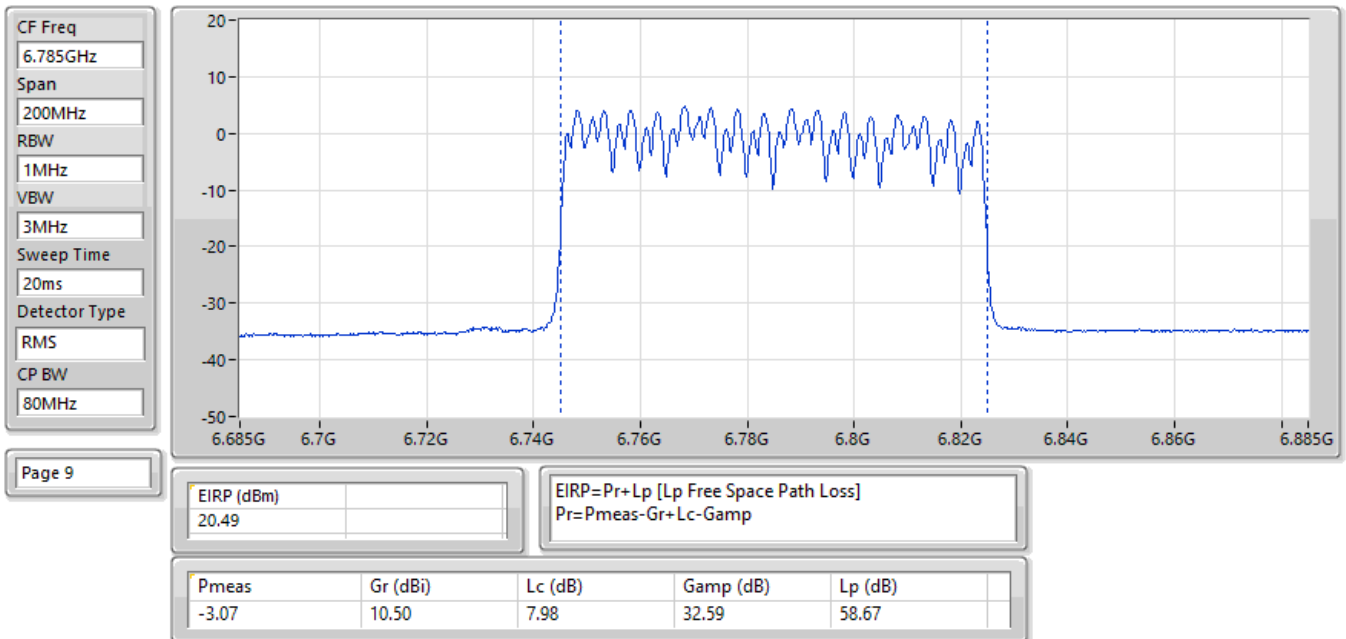


EIRP:Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6865MHz;TX

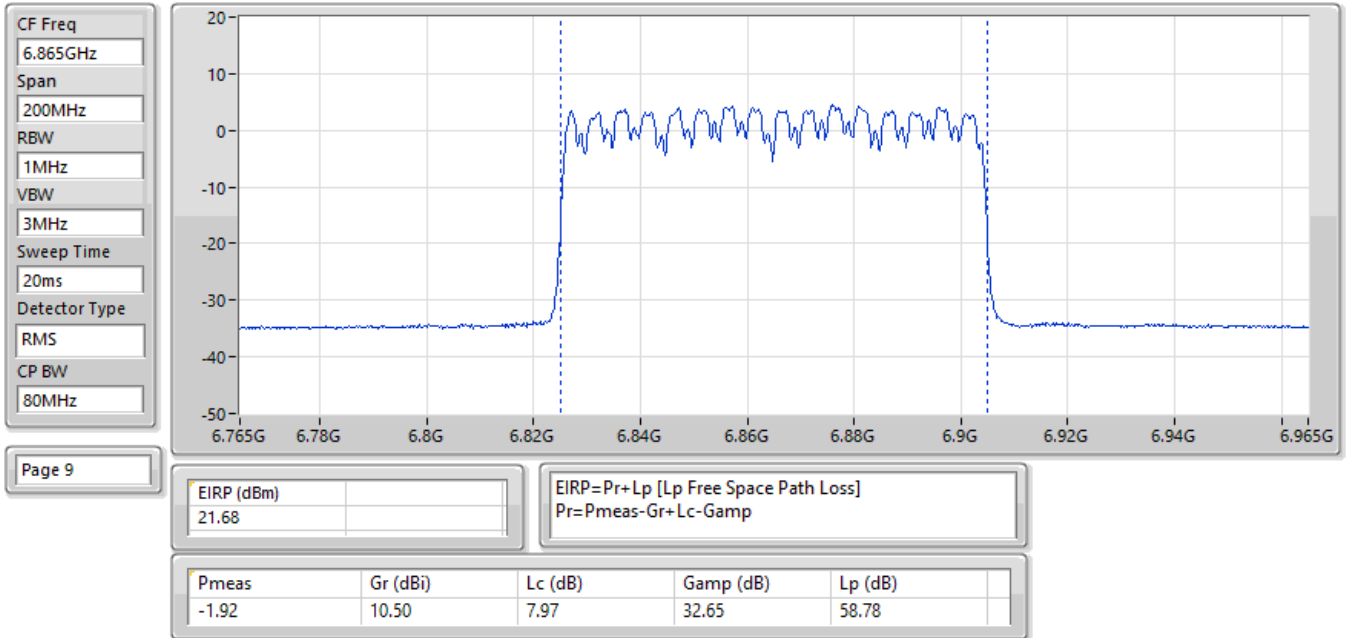


EIRP:Band:7.0G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6945MHz;TX

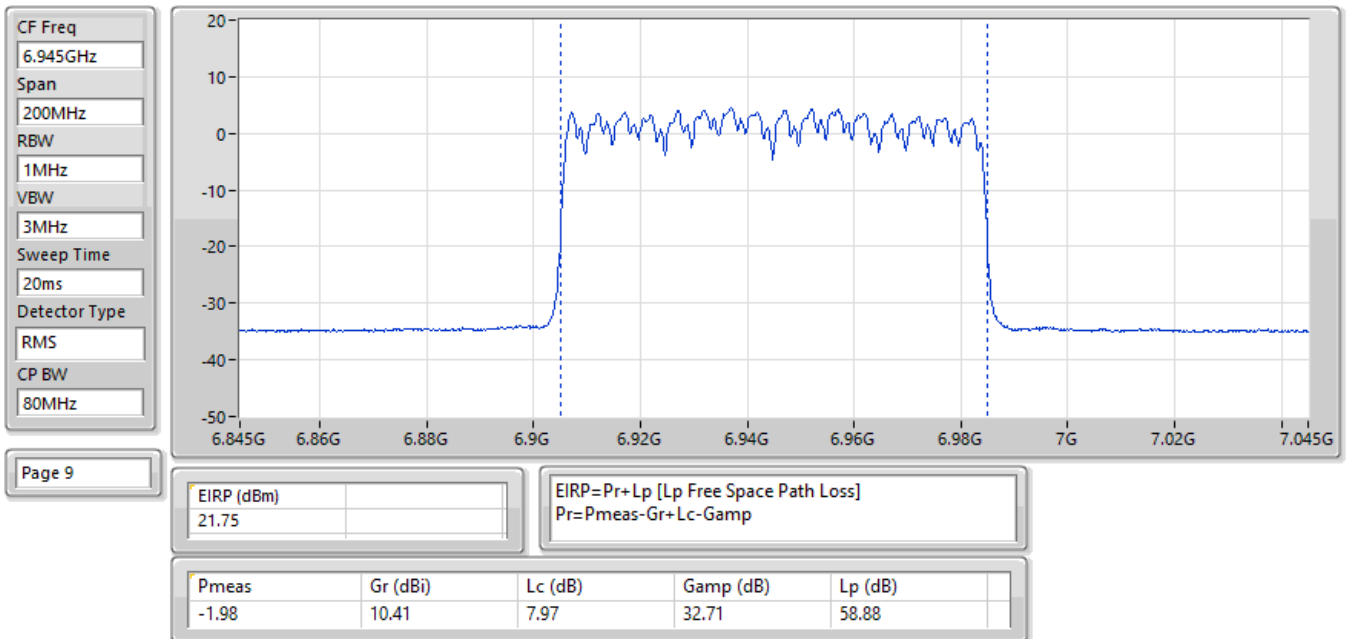


EIRP:Band:7.0G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:7025MHz;TX

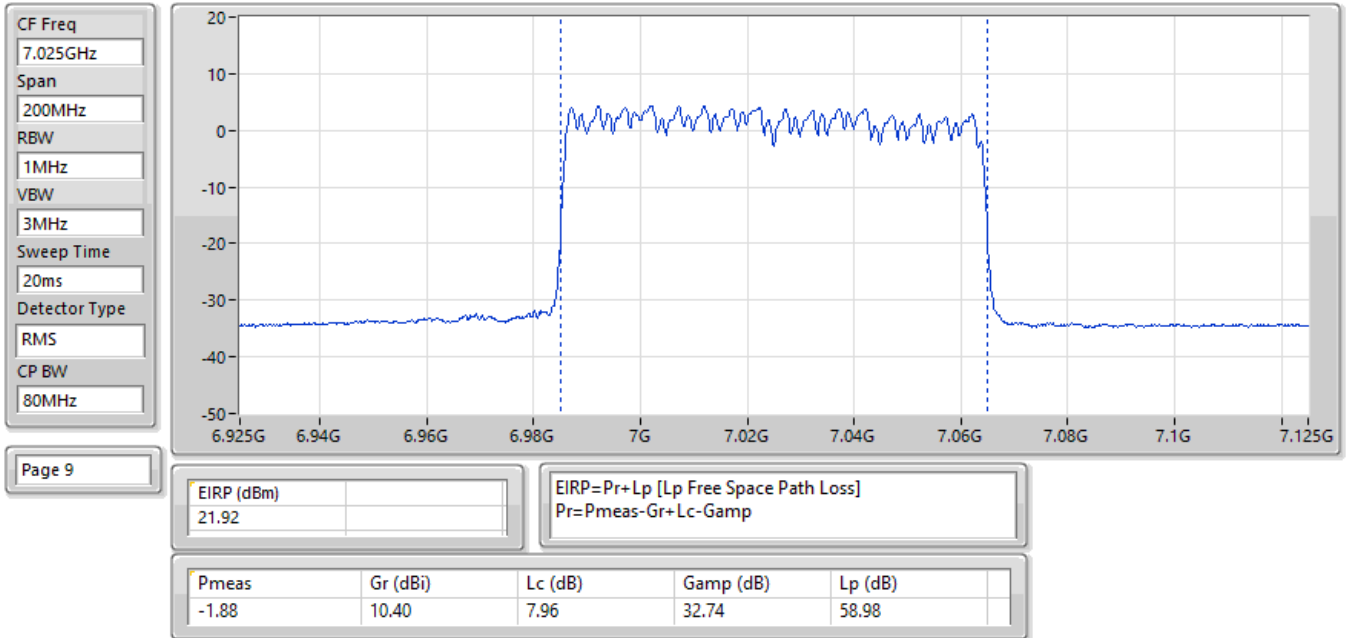


EIRP:Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6025MHz;TX

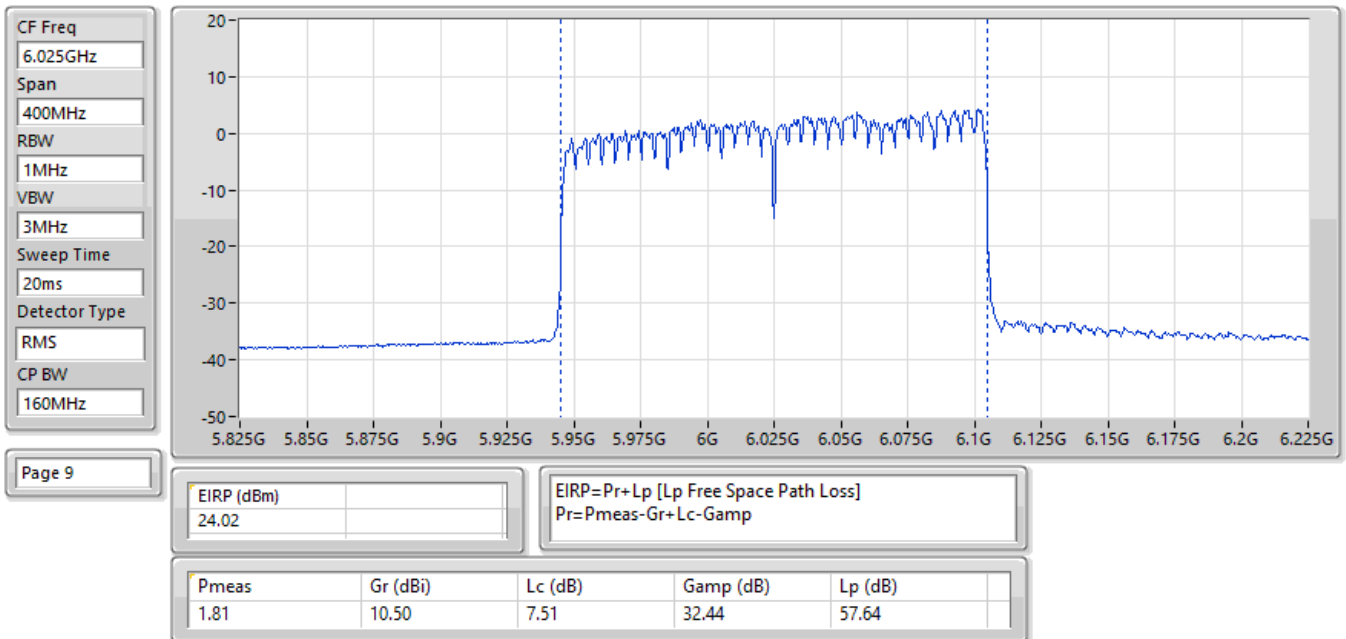


EIRP;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6185MHz;TX

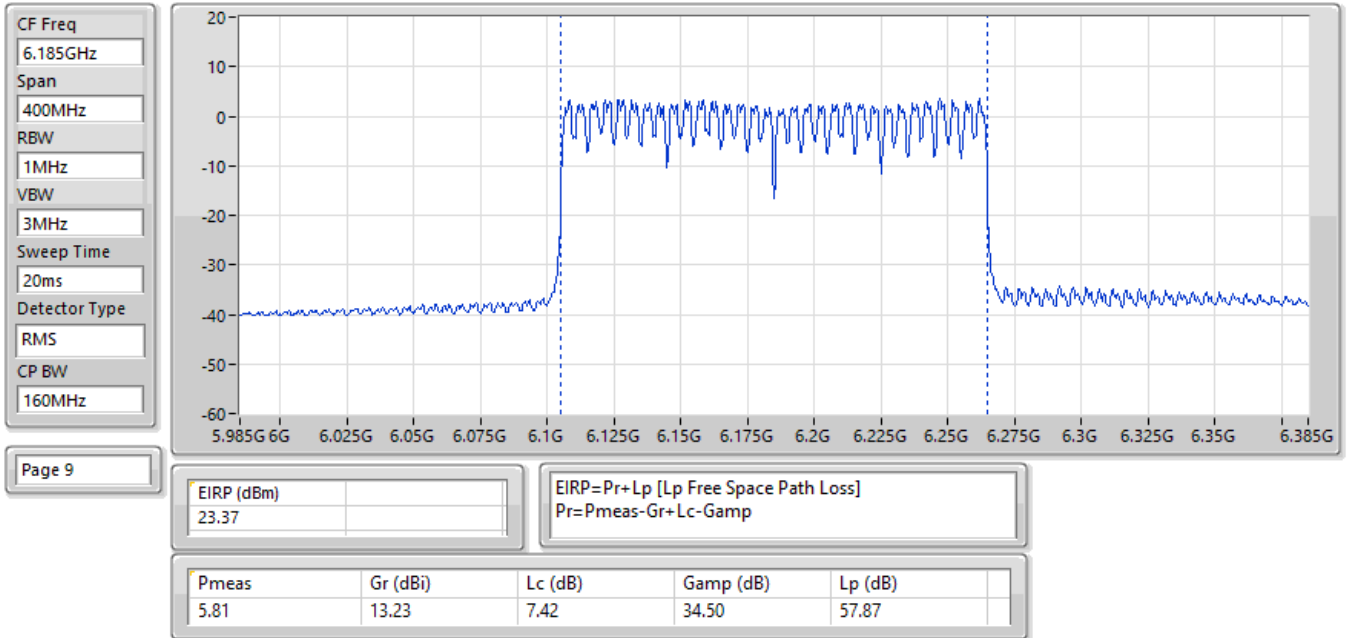


EIRP;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6345MHz;TX

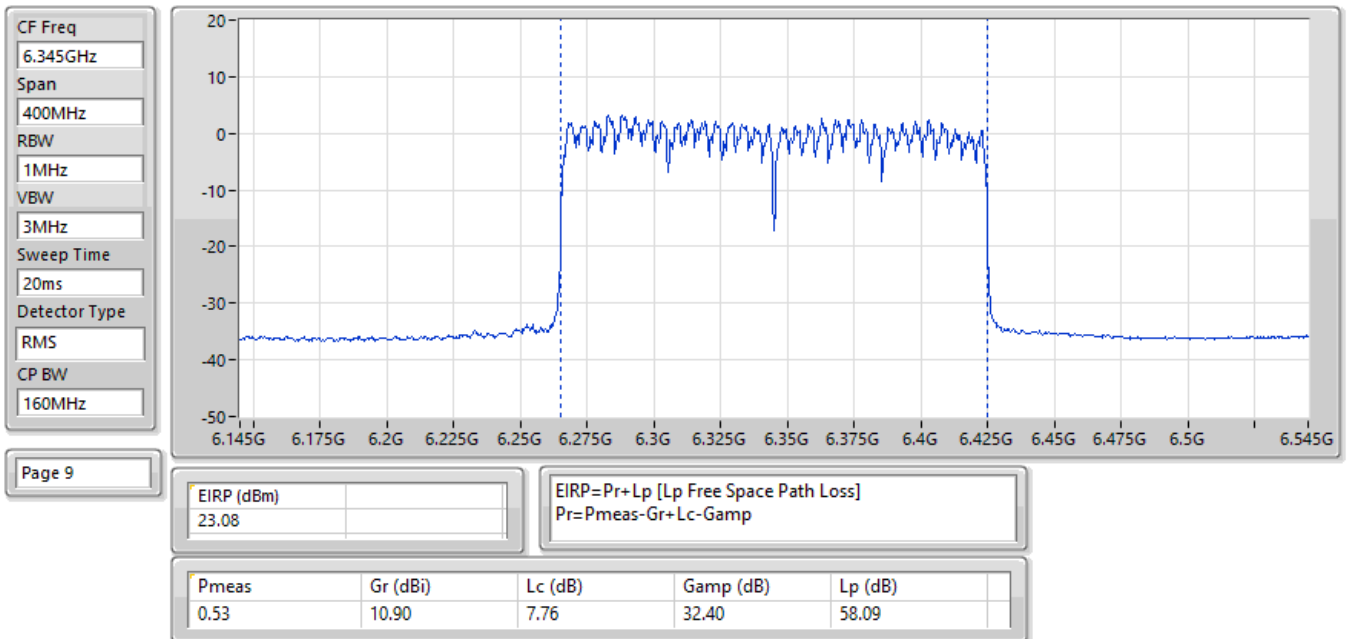


EIRP;Band:6.4G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6505MHz;TX

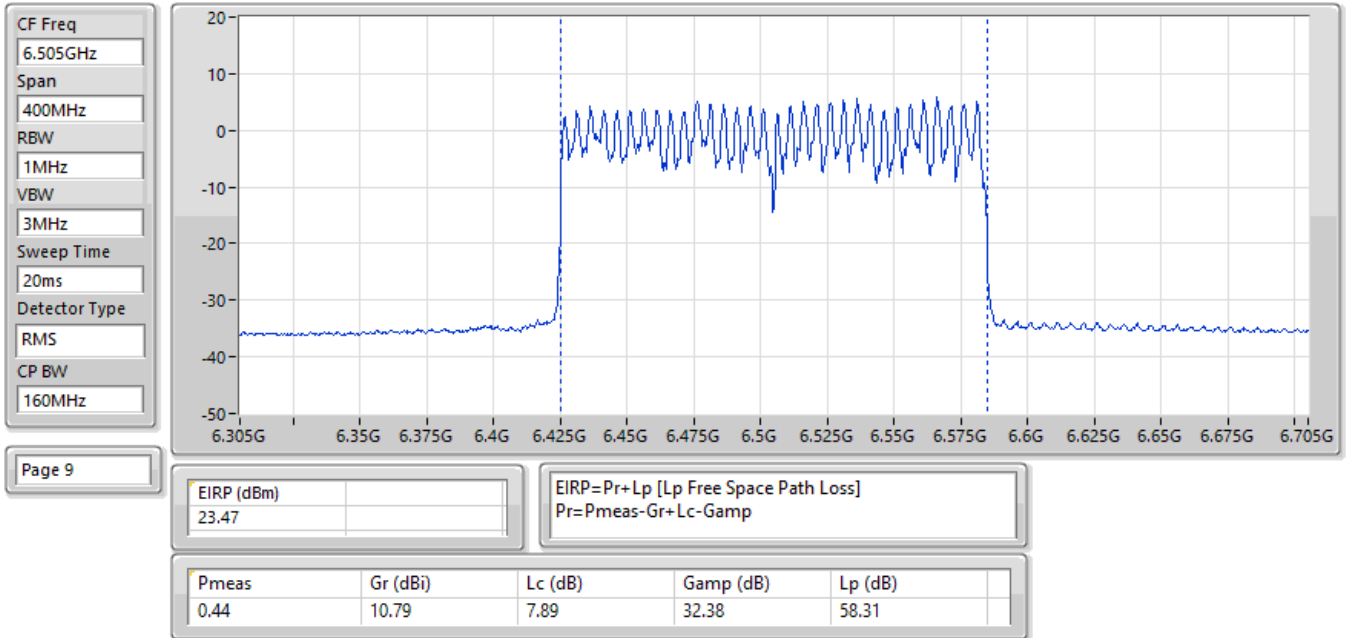


EIRP;Band:6.7G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6665MHz;TX

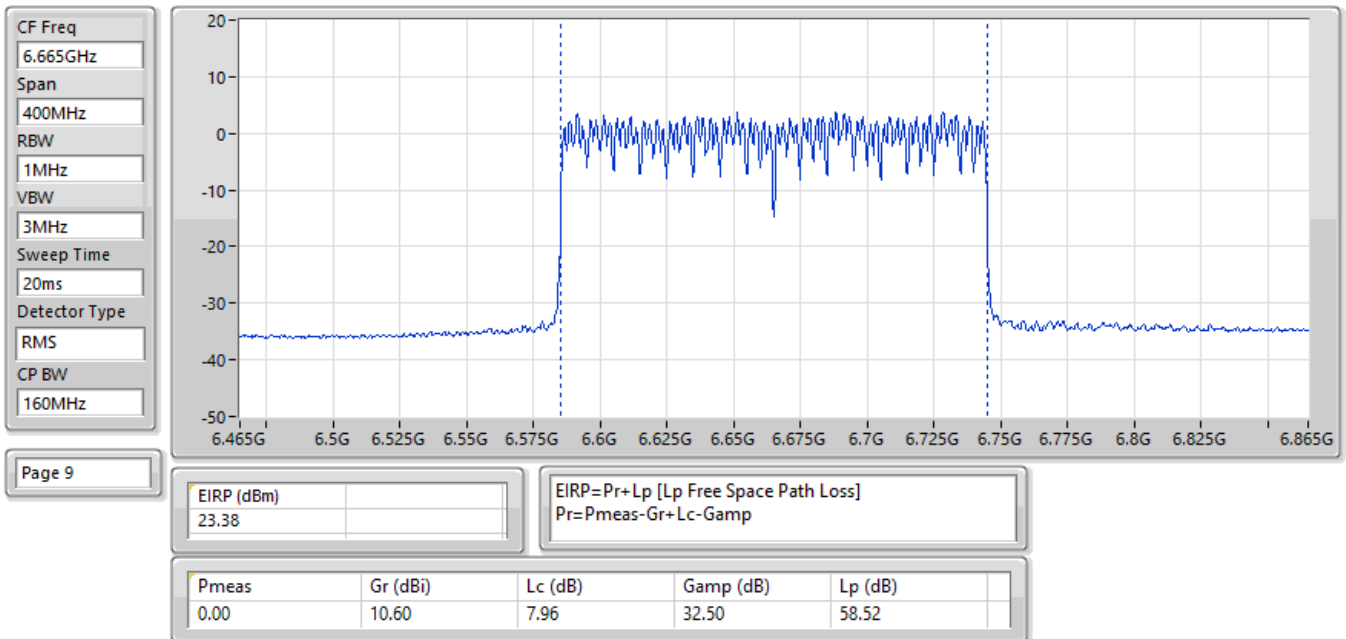


EIRP;Band:6.7G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6825MHz;TX

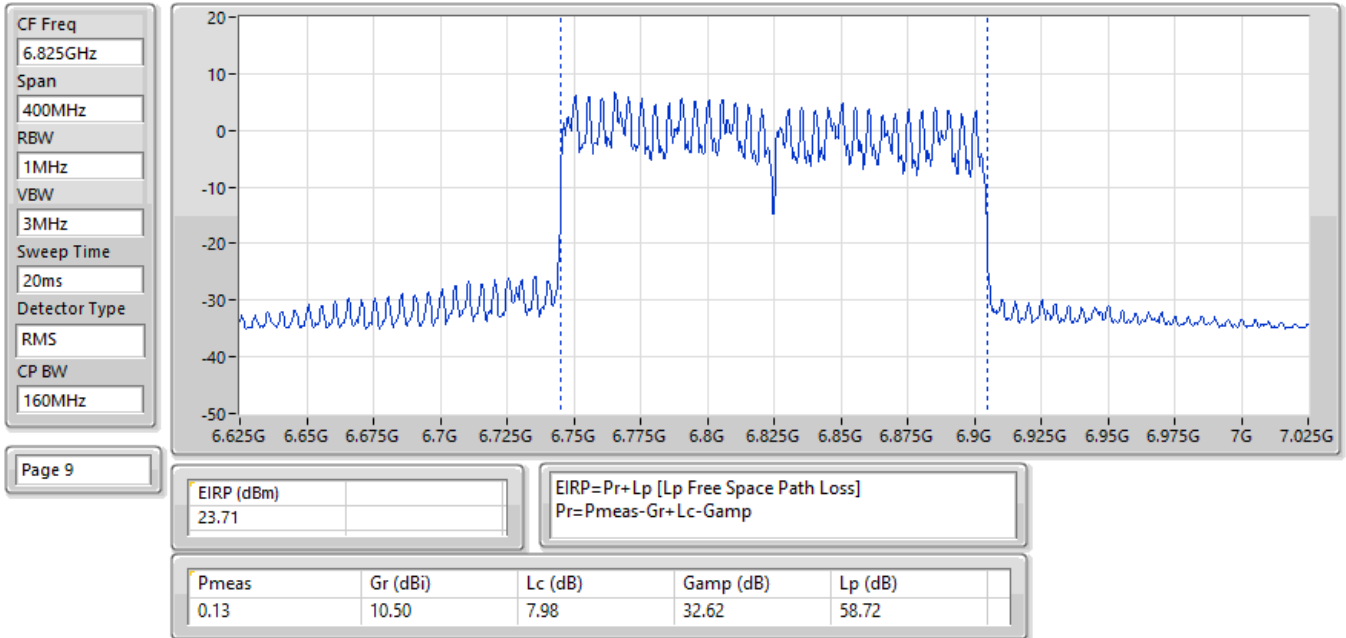


EIRP;Band:7.0G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6985MHz;TX

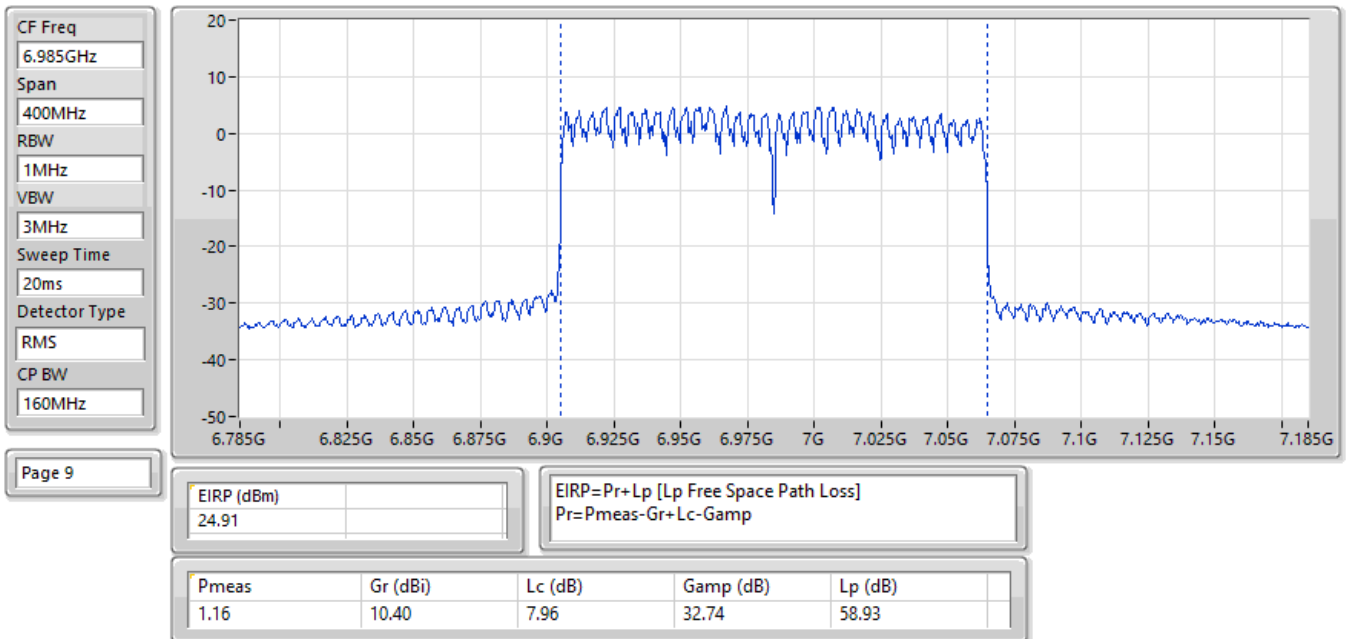


EIRP;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6105MHz;TX

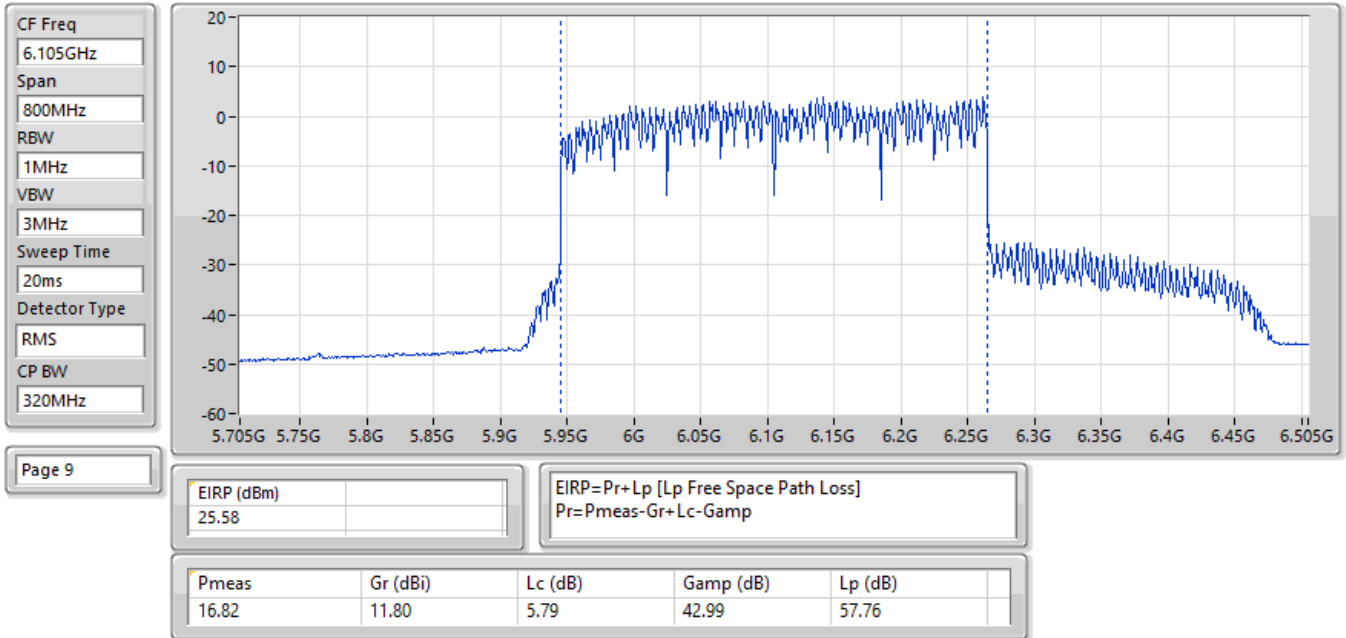


EIRP;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6265MHz;TX

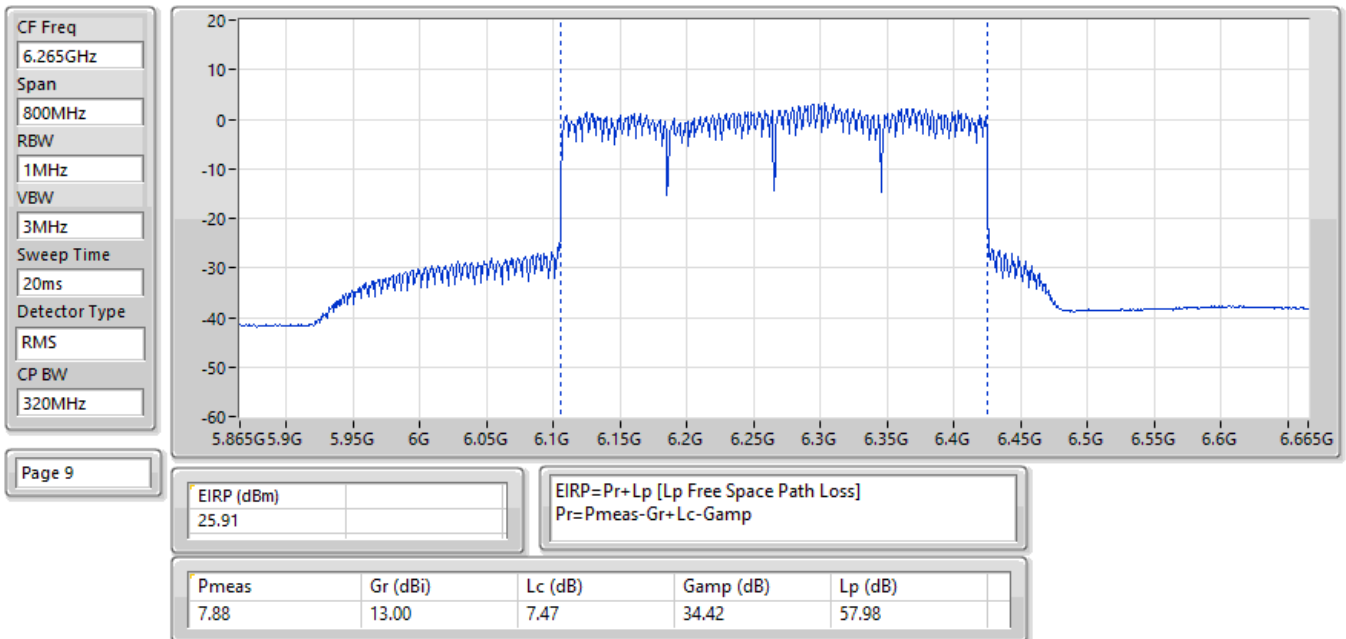


EIRP;Band:6.4G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6585MHz;TX

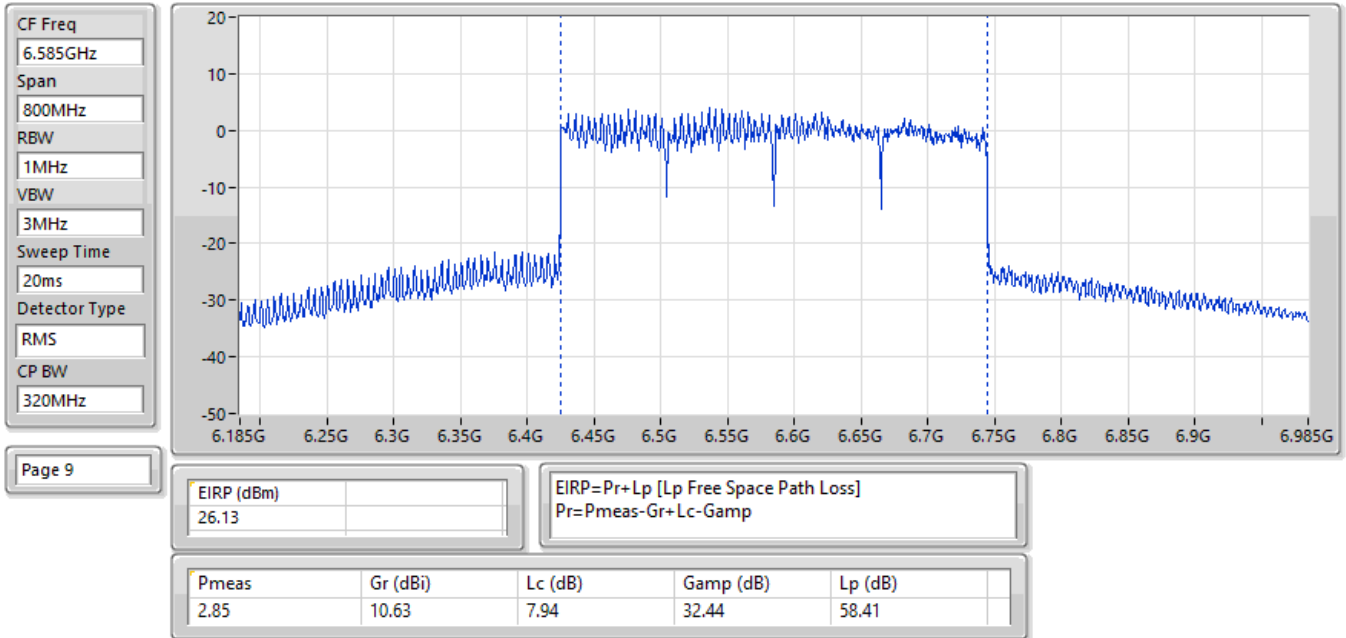

EIRP;Band:6.7G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6745MHz;TX

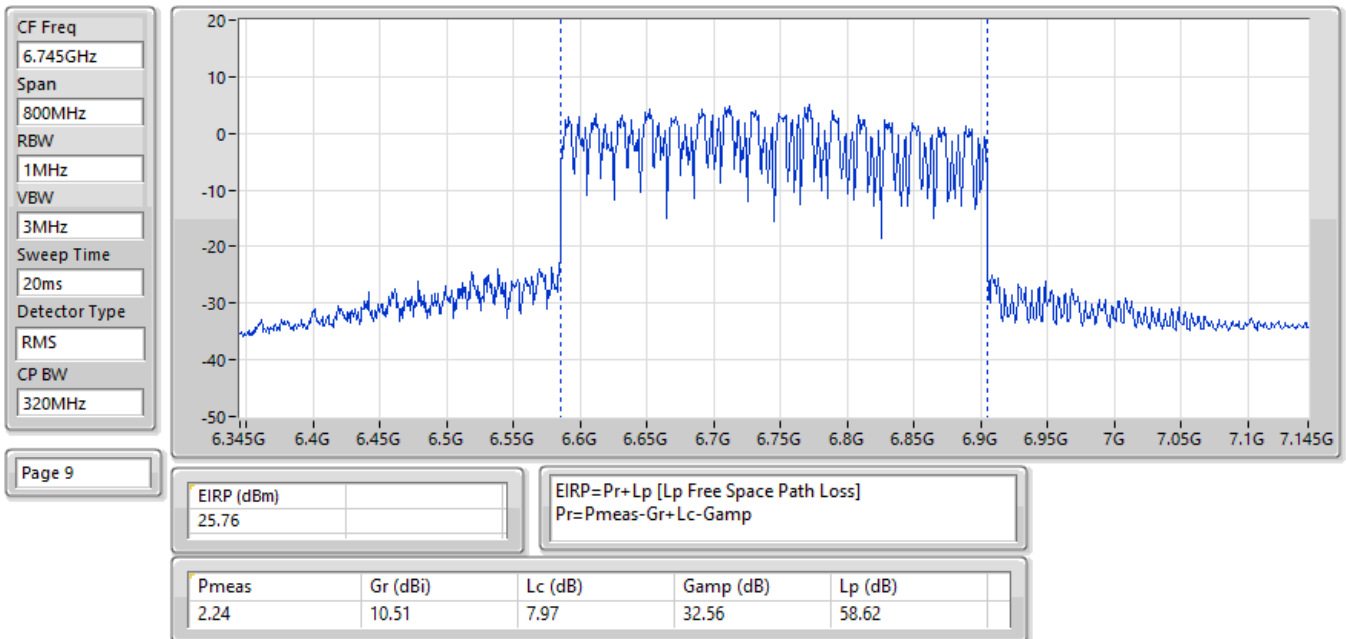

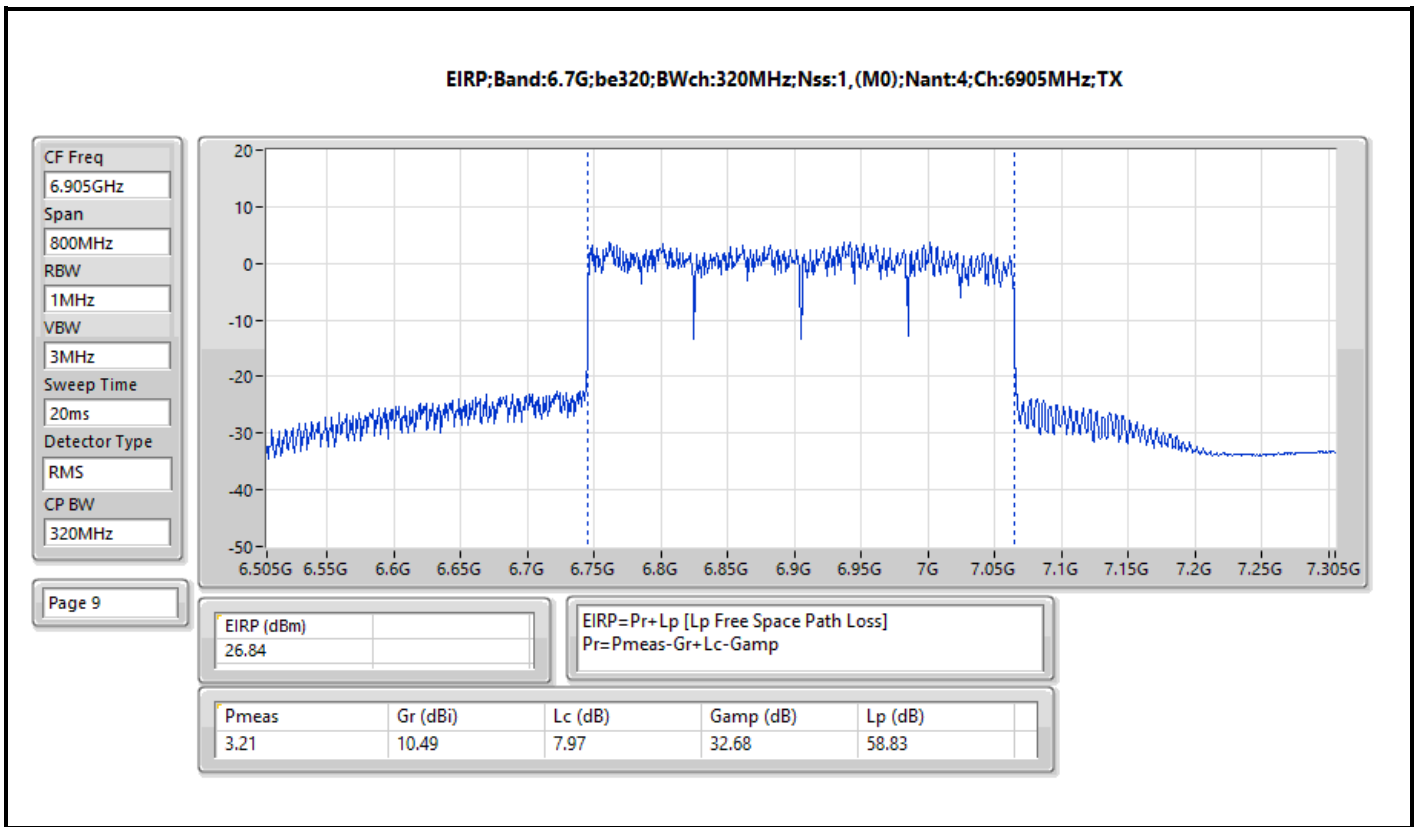



Test Mode: Mode 2

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	11.56	0.01432	17.58	0.05728
802.11be EHT40-BF_Nss1,(MCS0)_4TX	13.66	0.02323	19.68	0.09290
802.11be EHT80-BF_Nss1,(MCS0)_4TX	15.61	0.03639	21.63	0.14555
802.11be EHT160-BF_Nss1,(MCS0)_4TX	19.93	0.09840	25.95	0.39355
802.11be EHT320-BF_Nss1,(MCS0)_4TX	23.24	0.21086	29.26	0.84333
6.425-6.525GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	11.99	0.01581	18.01	0.06324
802.11be EHT40-BF_Nss1,(MCS0)_4TX	14.38	0.02742	20.40	0.10965
802.11be EHT80-BF_Nss1,(MCS0)_4TX	16.62	0.04592	22.64	0.18365
802.11be EHT160-BF_Nss1,(MCS0)_4TX	20.32	0.10765	26.34	0.43053
802.11be EHT320-BF_Nss1,(MCS0)_4TX	22.62	0.18281	28.64	0.73114
6.525-6.875GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	11.93	0.01560	17.95	0.06237
802.11be EHT40-BF_Nss1,(MCS0)_4TX	15.65	0.03673	21.67	0.14689
802.11be EHT80-BF_Nss1,(MCS0)_4TX	16.66	0.04634	22.68	0.18535
802.11be EHT160-BF_Nss1,(MCS0)_4TX	19.75	0.09441	25.77	0.37757
802.11be EHT320-BF_Nss1,(MCS0)_4TX	23.12	0.20512	29.14	0.82035
6.875-7.125GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	12.09	0.01618	18.11	0.06471
802.11be EHT40-BF_Nss1,(MCS0)_4TX	14.66	0.02924	20.68	0.11695
802.11be EHT80-BF_Nss1,(MCS0)_4TX	17.97	0.06266	23.99	0.25061
802.11be EHT160-BF_Nss1,(MCS0)_4TX	18.76	0.07516	24.78	0.30061

Result

Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-
5955MHz	Pass	14.21	30.00
6195MHz	Pass	17.38	30.00
6415MHz	Pass	17.58	30.00
6435MHz	Pass	18.01	30.00
6475MHz	Pass	17.03	30.00
6515MHz	Pass	17.37	30.00
6535MHz	Pass	17.72	30.00
6695MHz	Pass	16.81	30.00
6875MHz	Pass	17.95	30.00
6895MHz	Pass	18.11	30.00
6995MHz	Pass	17.23	30.00
7095MHz	Pass	17.57	30.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-
5965MHz	Pass	19.15	30.00
6205MHz	Pass	19.68	30.00
6405MHz	Pass	19.45	30.00
6445MHz	Pass	19.84	30.00
6485MHz	Pass	19.65	30.00
6525MHz	Pass	20.40	30.00
6565MHz	Pass	18.81	30.00
6685MHz	Pass	19.30	30.00
6885MHz	Pass	21.67	30.00
6925MHz	Pass	19.15	30.00
7005MHz	Pass	20.68	30.00
7085MHz	Pass	20.14	30.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-
5985MHz	Pass	21.63	30.00
6225MHz	Pass	21.55	30.00
6385MHz	Pass	19.97	30.00
6465MHz	Pass	21.31	30.00
6545MHz	Pass	22.64	30.00
6625MHz	Pass	21.43	30.00
6705MHz	Pass	22.00	30.00
6785MHz	Pass	22.16	30.00
6865MHz	Pass	22.68	30.00
6945MHz	Pass	21.30	30.00
7025MHz	Pass	23.99	30.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-
6025MHz	Pass	22.01	30.00
6185MHz	Pass	25.95	30.00
6345MHz	Pass	23.31	30.00
6505MHz	Pass	26.34	30.00
6665MHz	Pass	24.74	30.00
6825MHz	Pass	25.77	30.00
6985MHz	Pass	24.78	30.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-
6105MHz	Pass	29.26	30.00
6265MHz	Pass	28.47	30.00
6585MHz	Pass	28.64	30.00
6745MHz	Pass	29.14	30.00
6905MHz	Pass	27.73	30.00

DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.

26/02/2025

EIRP;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:5955MHz;TX

CF Freq
5.955GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
20MHz

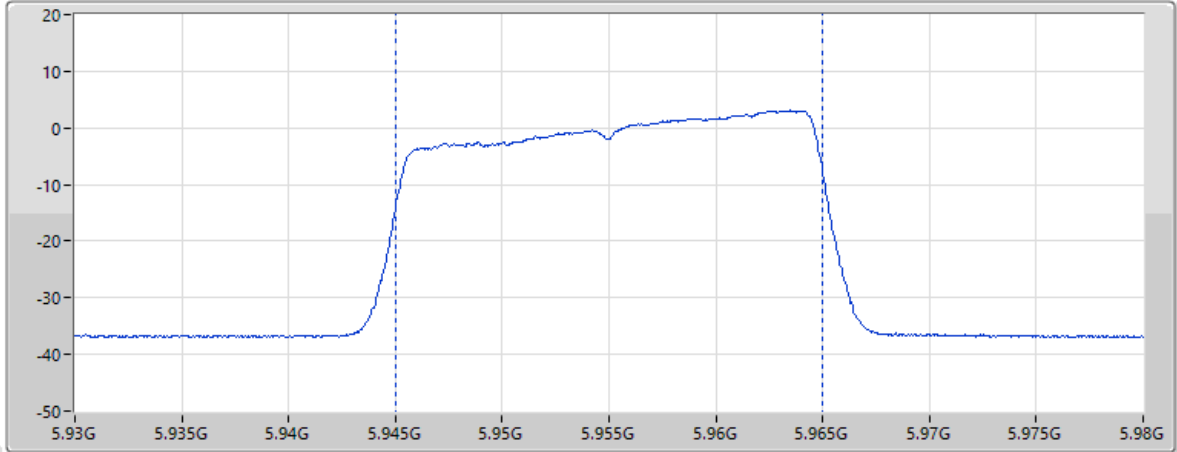

Page 9

EIRP (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
14.21				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-9.11	11.50	7.90	30.62	57.54

26/02/2025

EIRP;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6195MHz;TX

CF Freq
6.195GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
20MHz

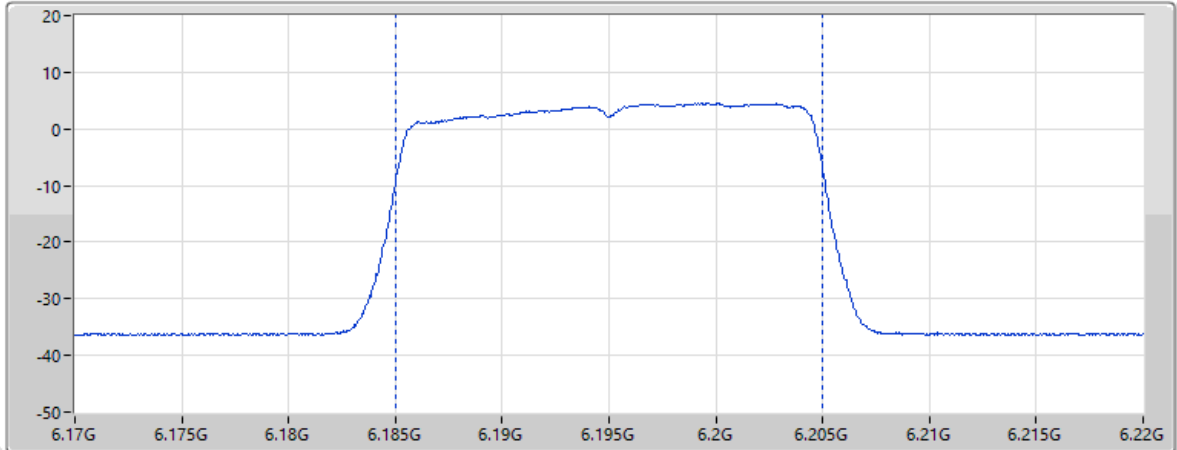


Page 9

EIRP (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
17.38				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-6.51	11.40	8.23	30.82	57.88


26/02/2025

EIRP:Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6415MHz;TX

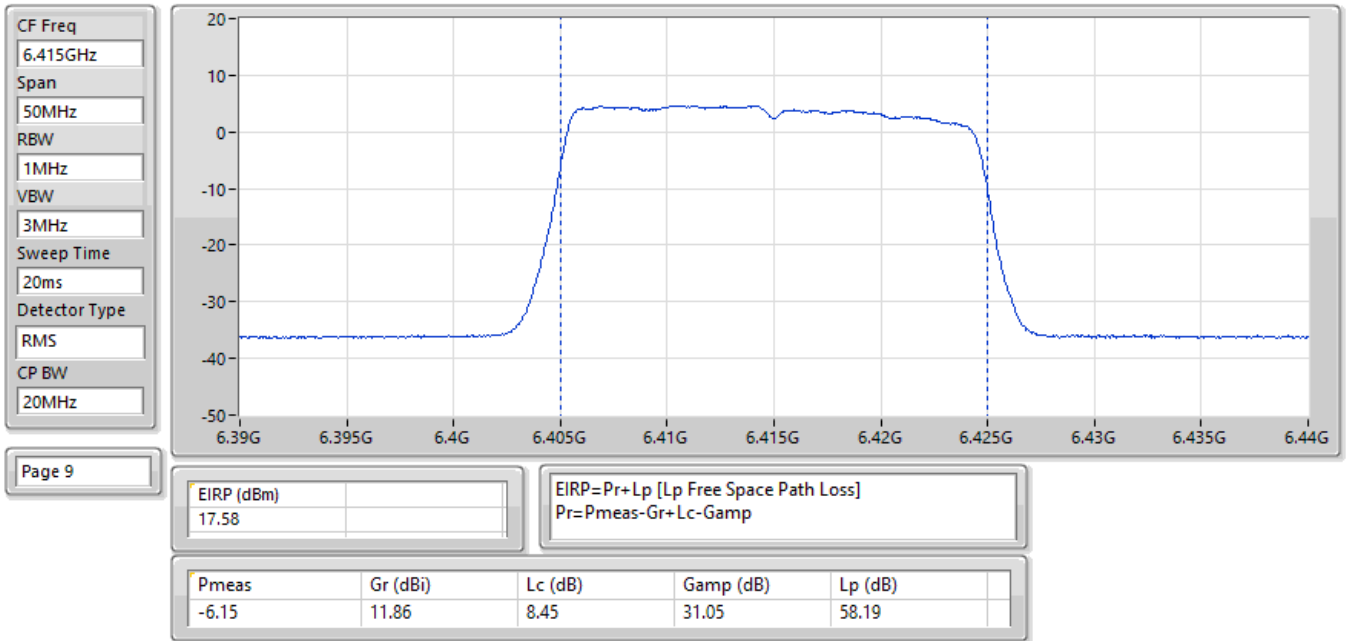


26/02/2025

EIRP:Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6435MHz;TX

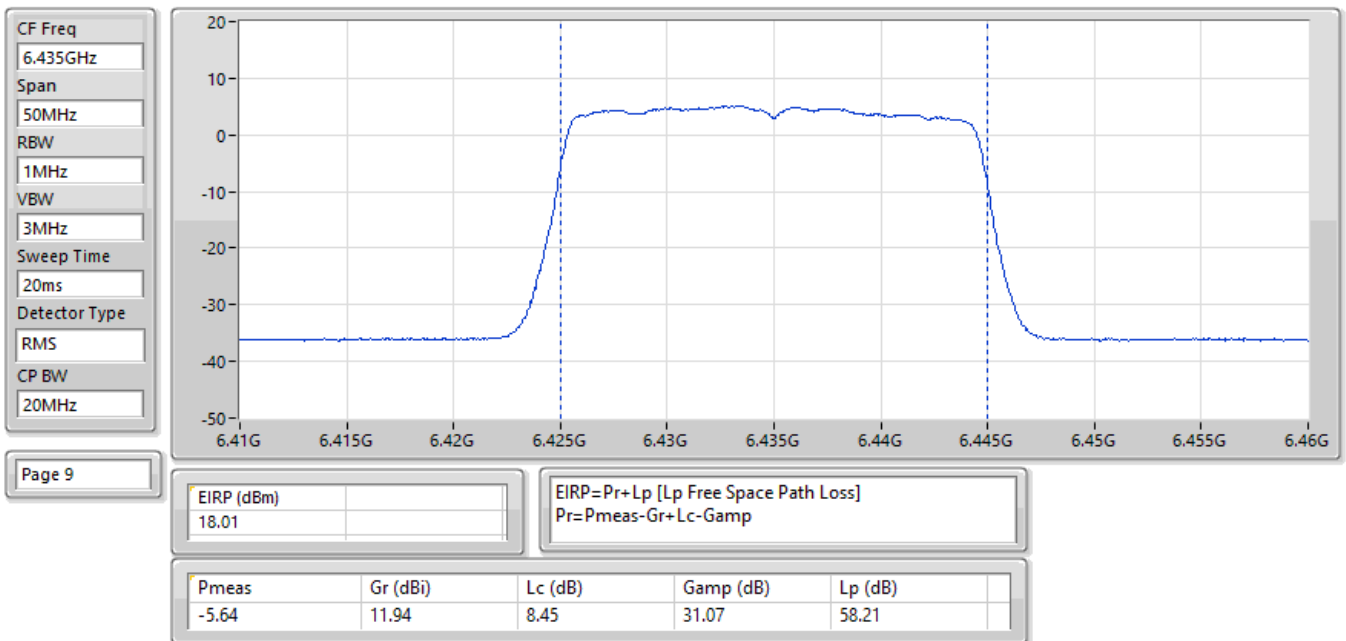


26/02/2025

EIRP:Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6475MHz;TX

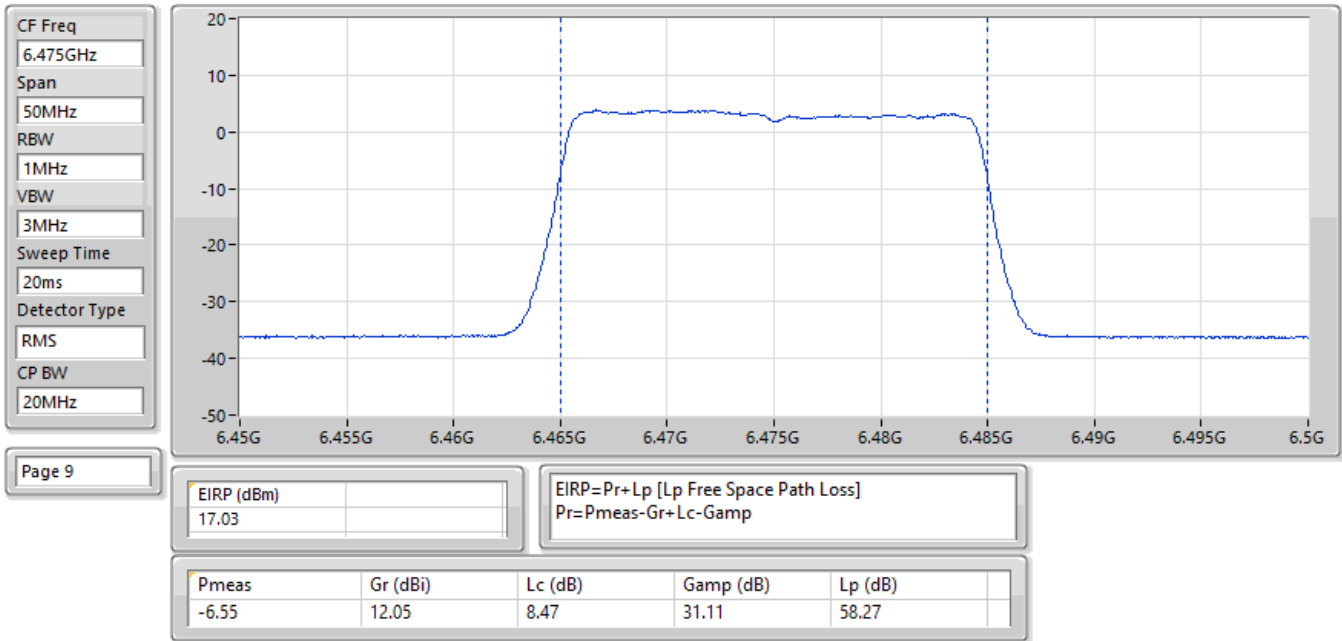


27/02/2025

EIRP:Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6515MHz;TX

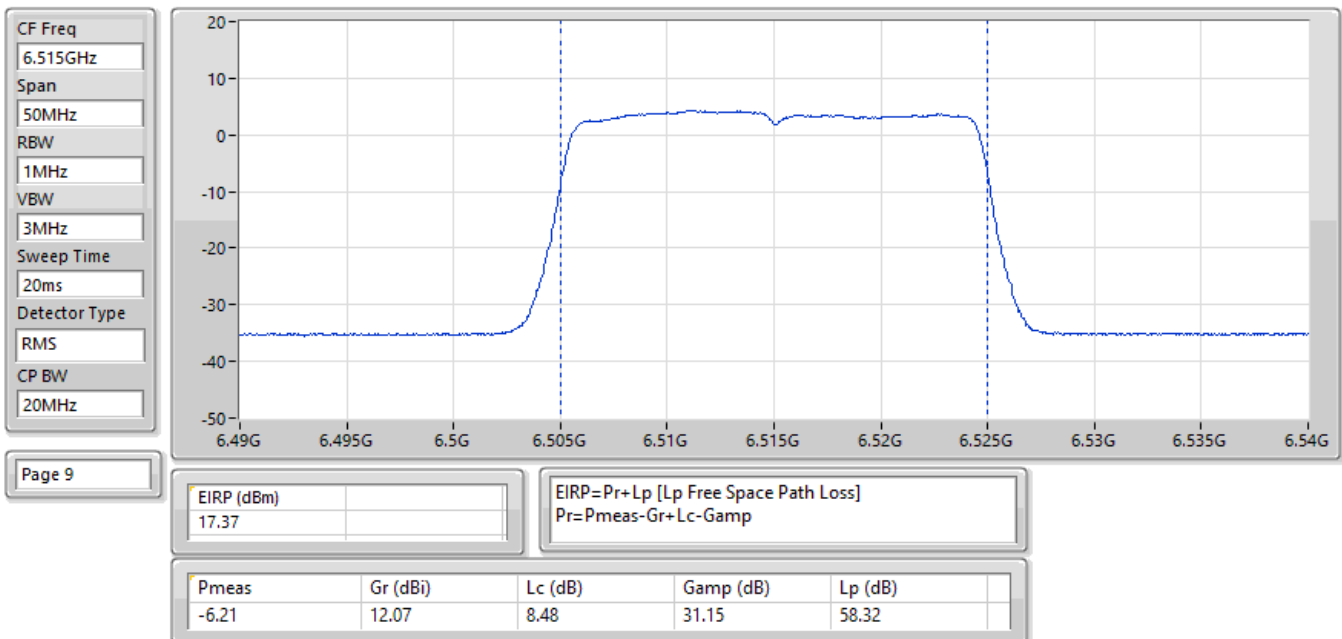


27/02/2025

EIRP:Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6535MHz;TX

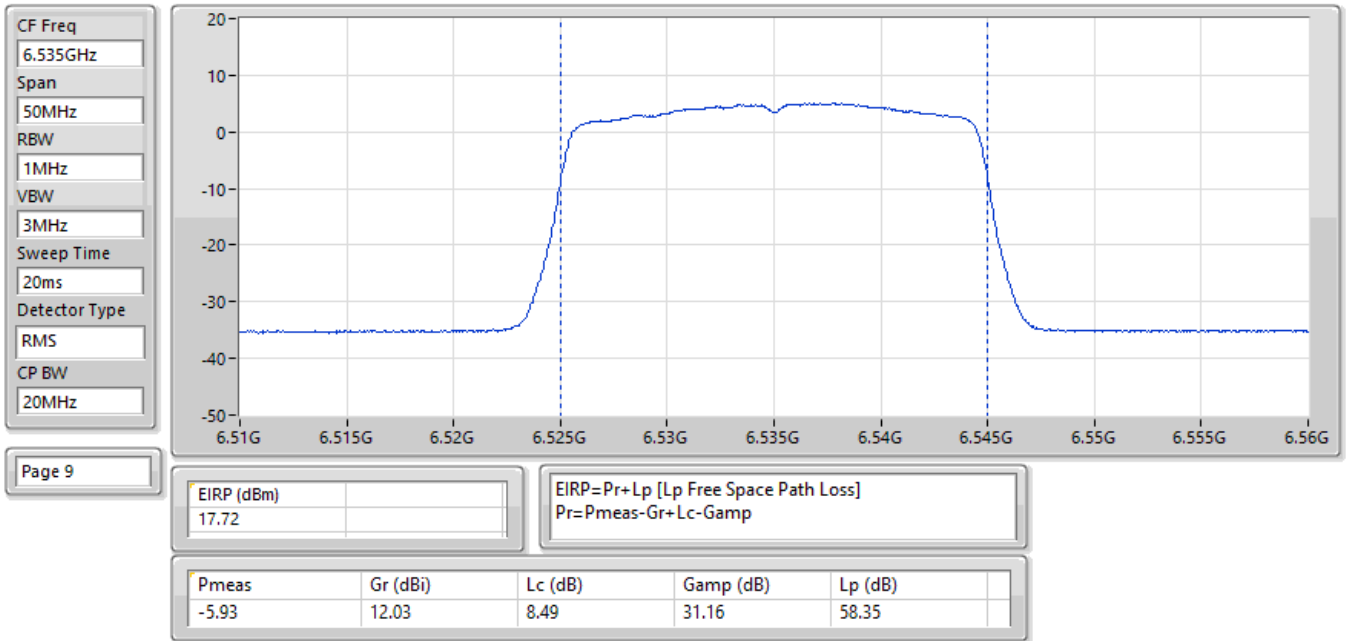


27/02/2025

EIRP:Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6695MHz;TX

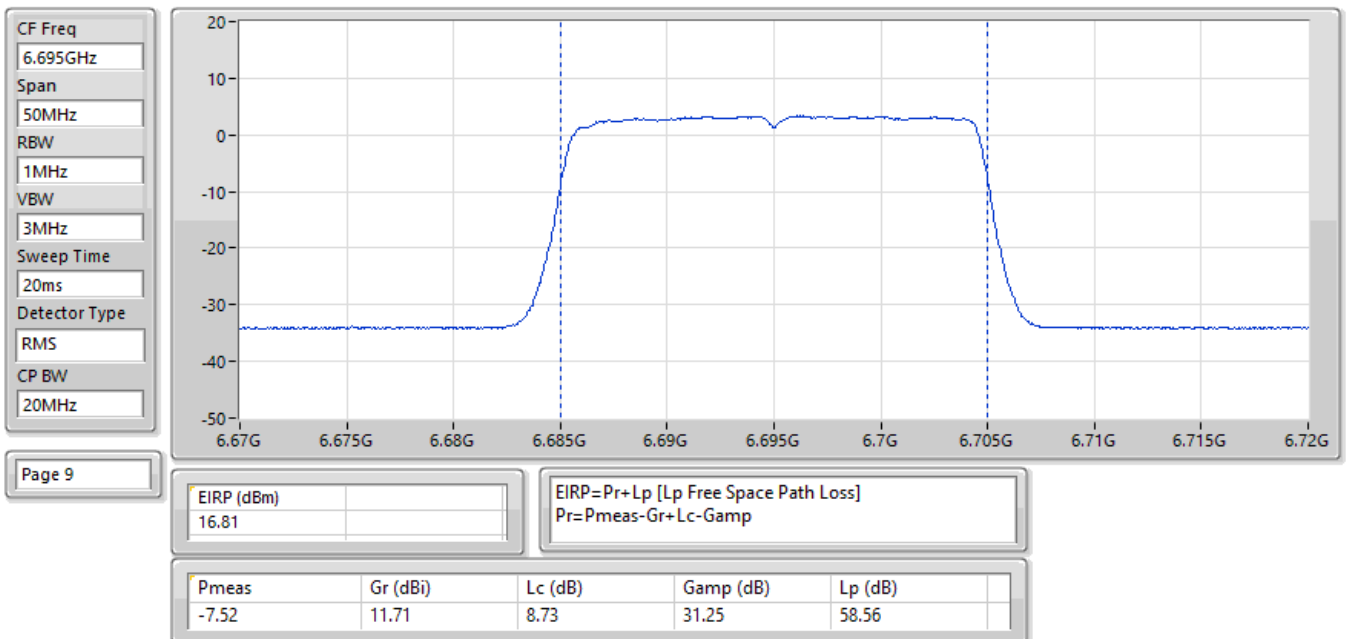


27/02/2025

EIRP:Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6875MHz;TX

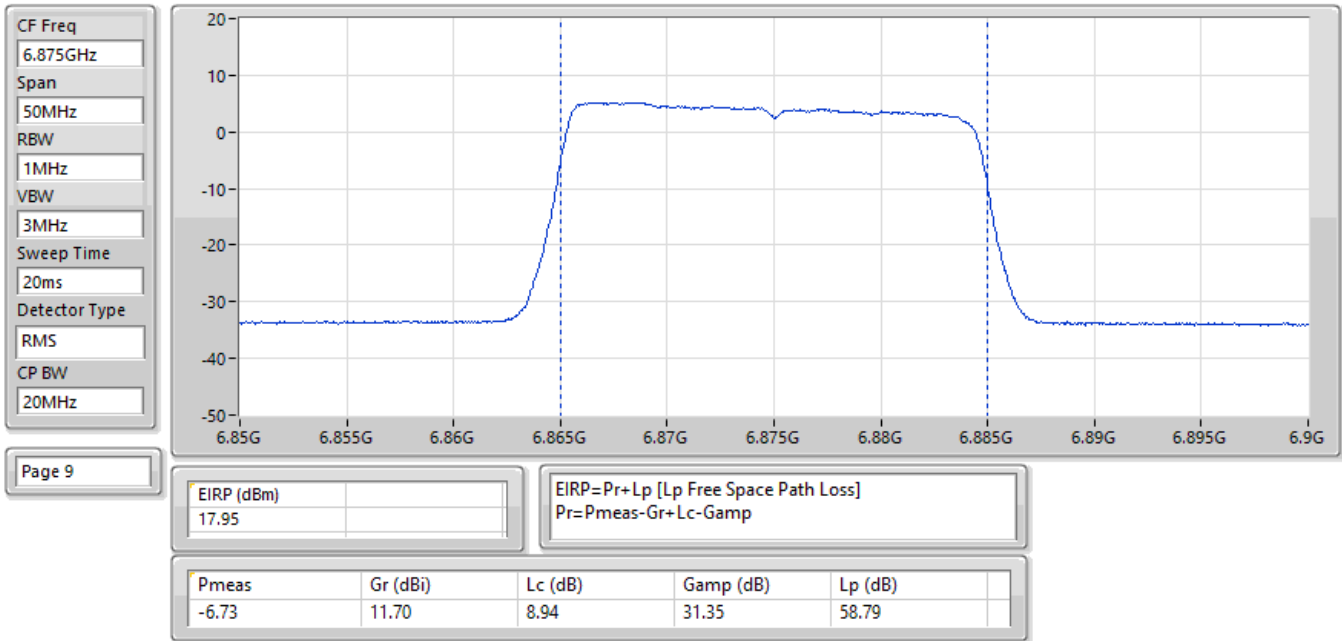


27/02/2025

EIRP:Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6895MHz;TX

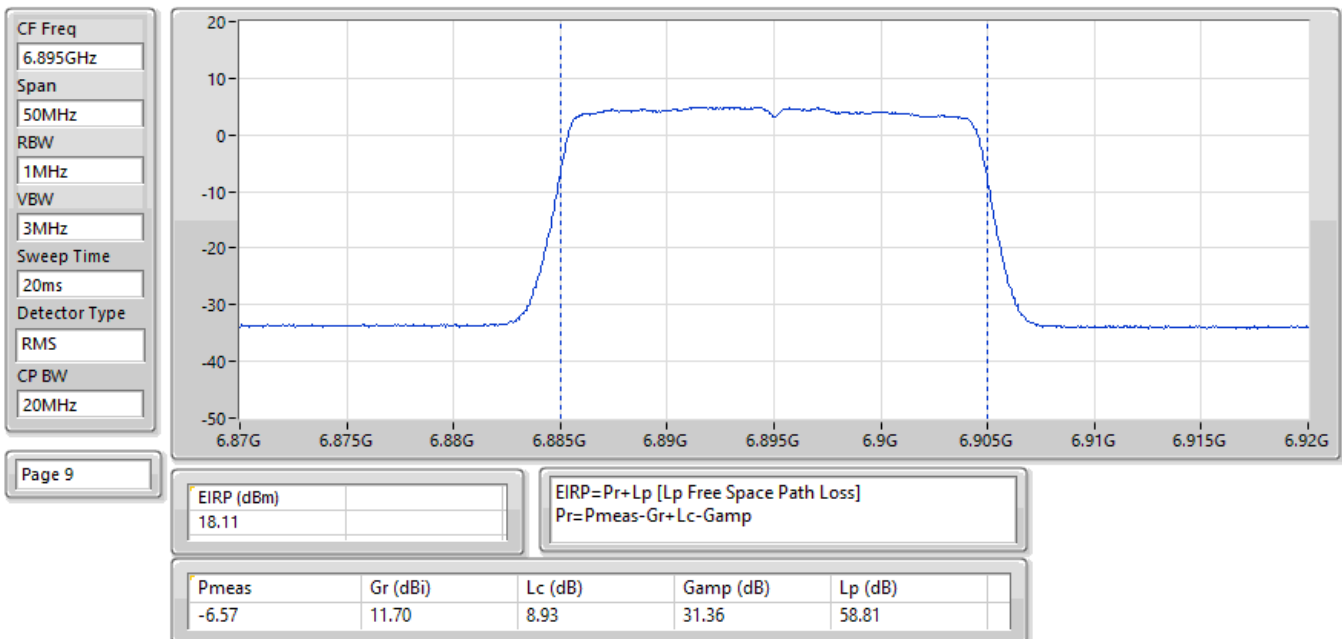


27/02/2025

EIRP:Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6995MHz;TX

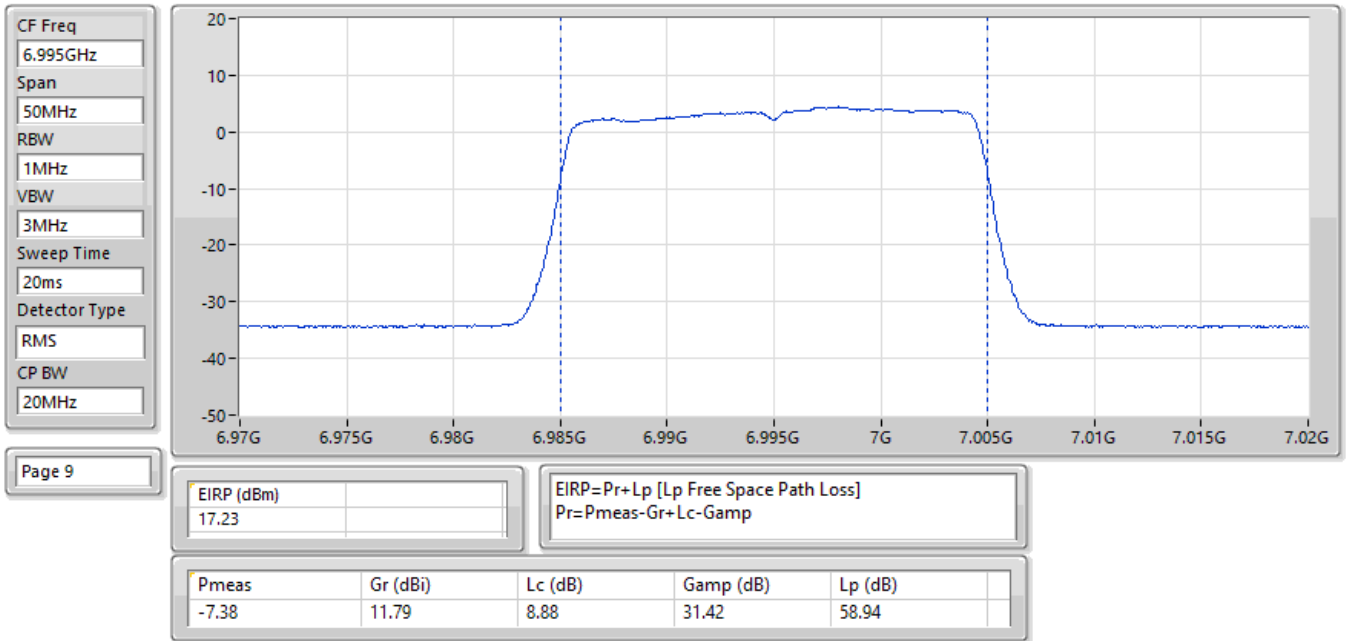


26/02/2025

EIRP:Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:7095MHz;TX

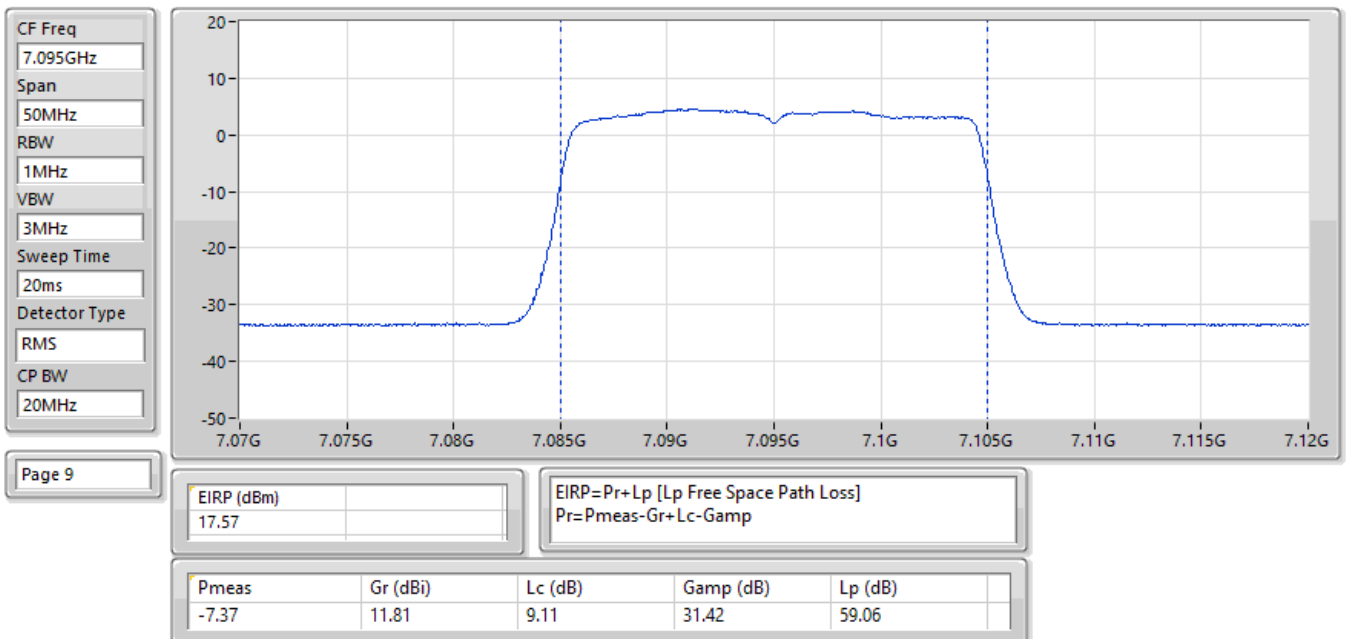


26/02/2025

EIRP:Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:5965MHz;TX

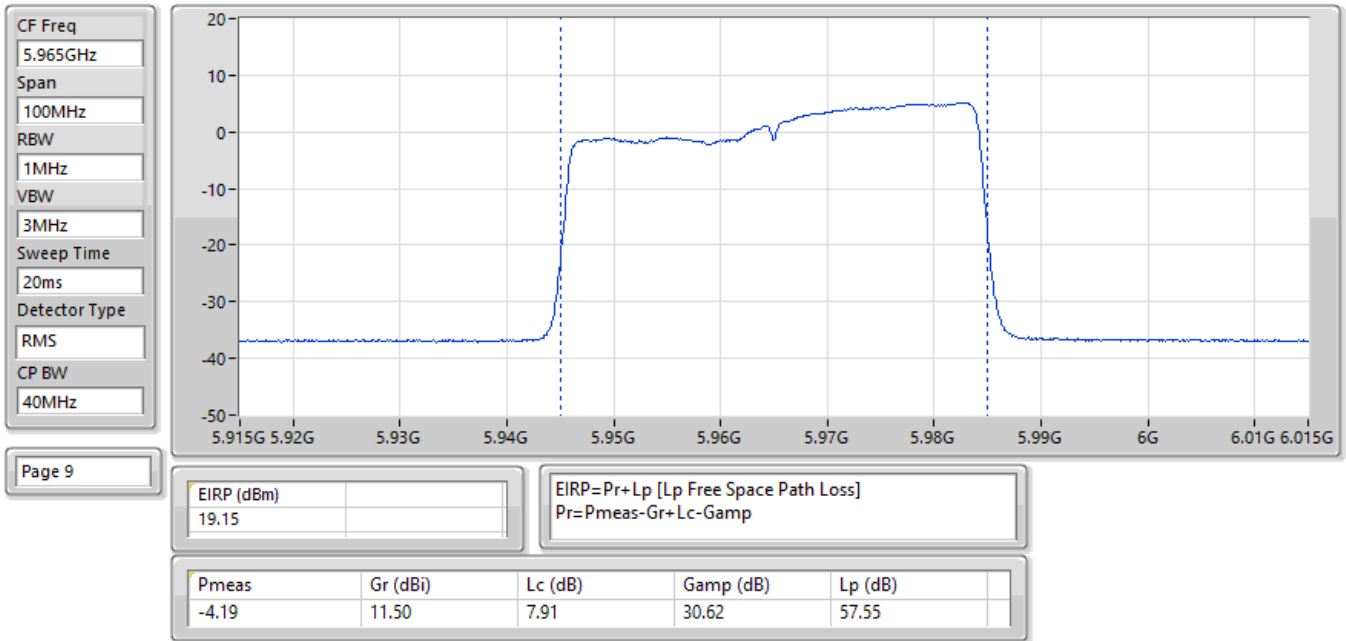


26/02/2025

EIRP:Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6205MHz;TX

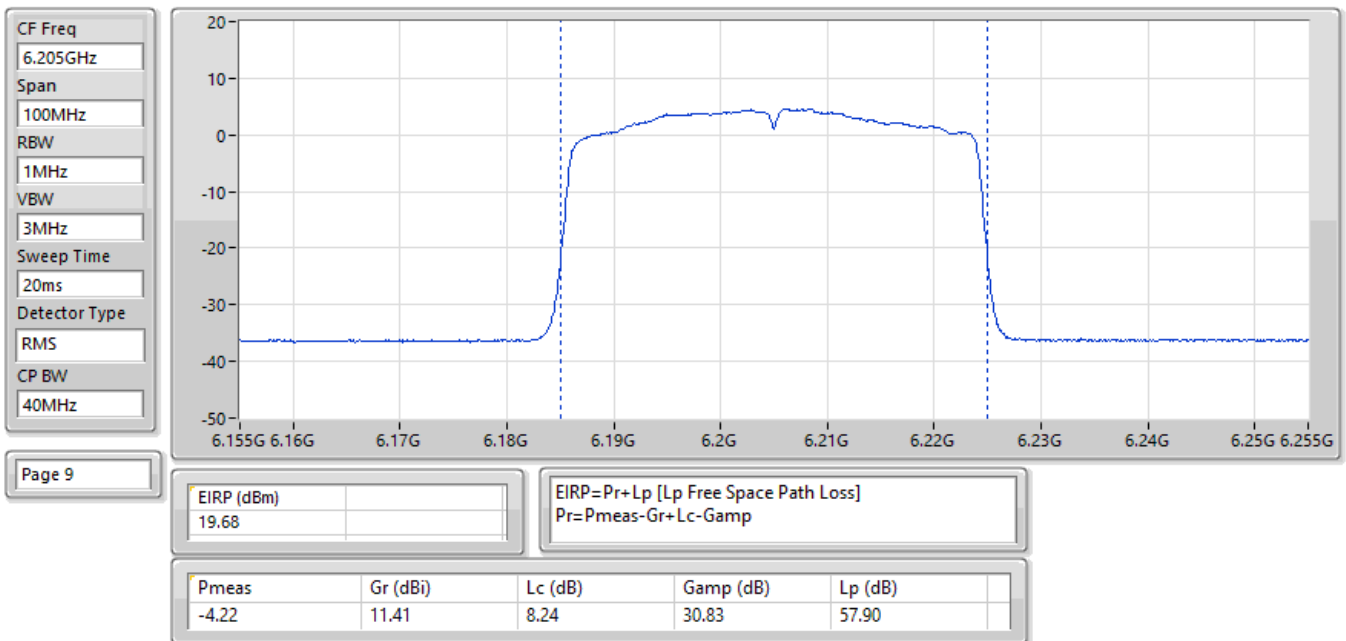


26/02/2025

EIRP:Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6405MHz;TX

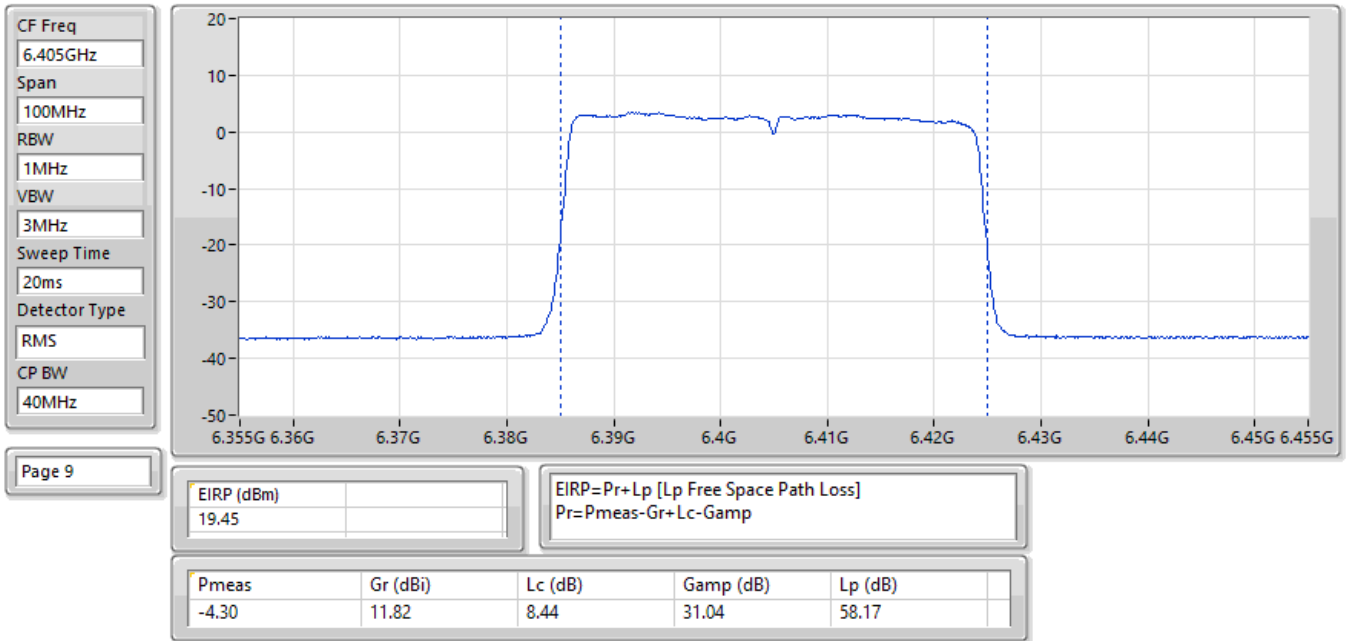


26/02/2025

EIRP:Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6445MHz;TX

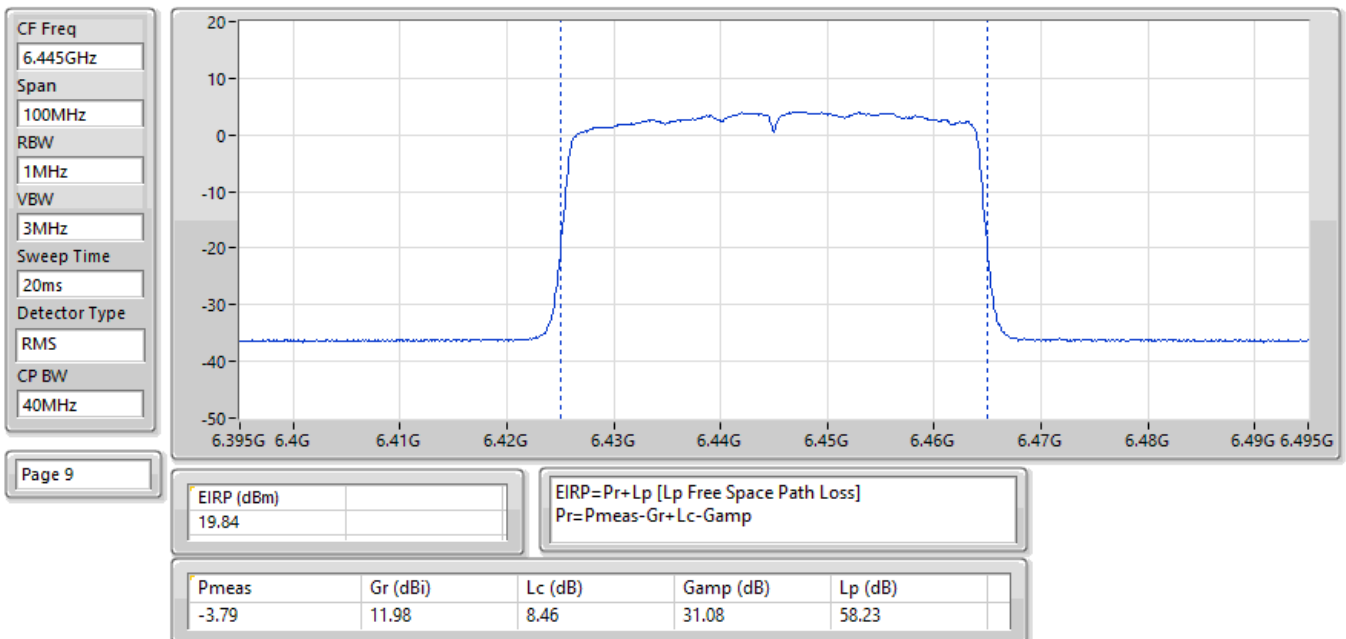


26/02/2025

EIRP:Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6485MHz;TX

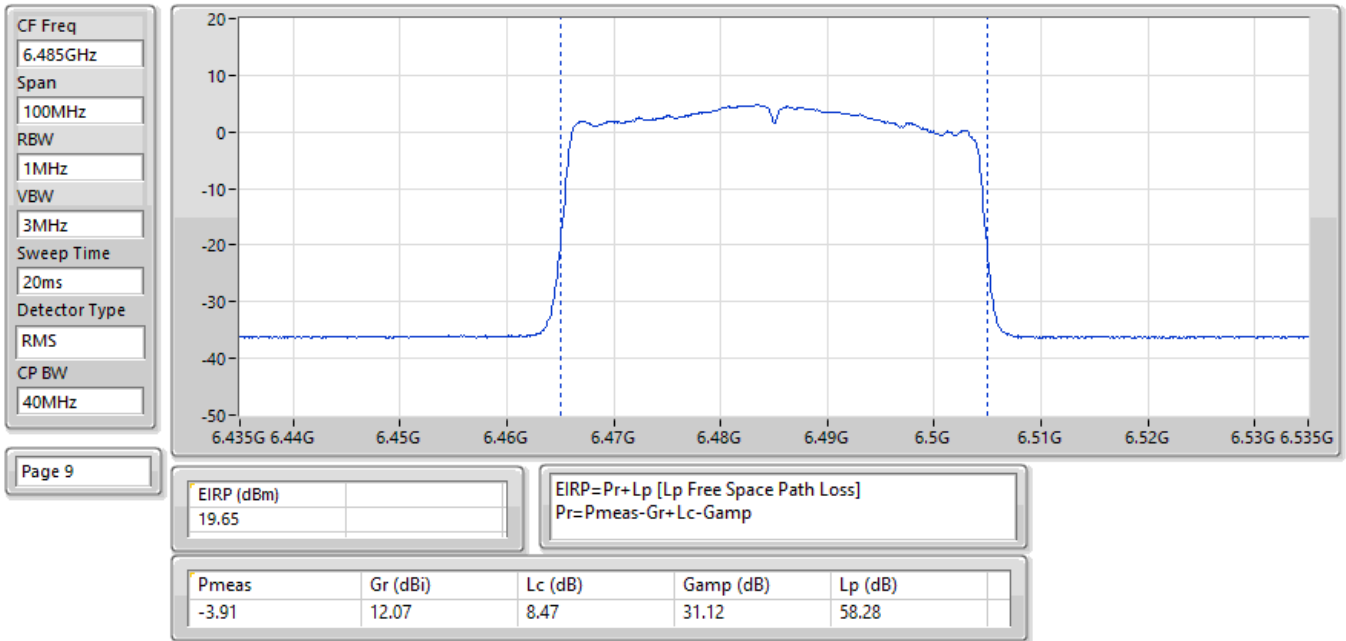


26/02/2025

EIRP:Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6525MHz;TX

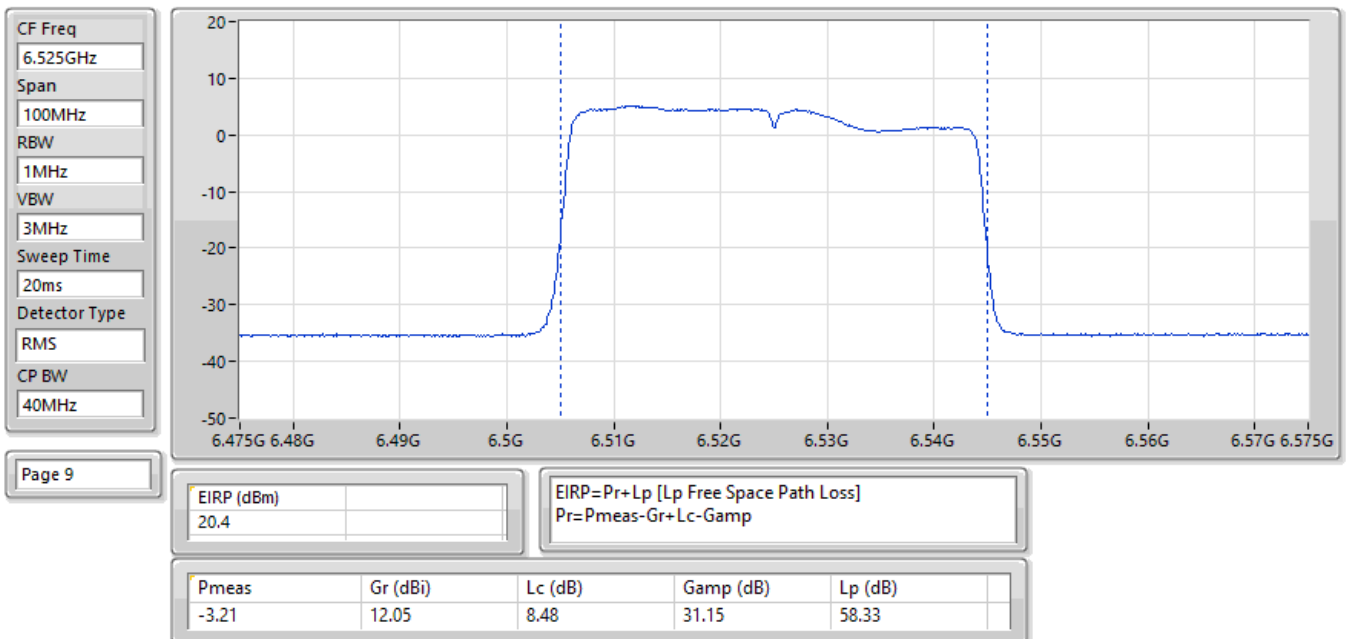


27/02/2025

EIRP:Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6565MHz;TX

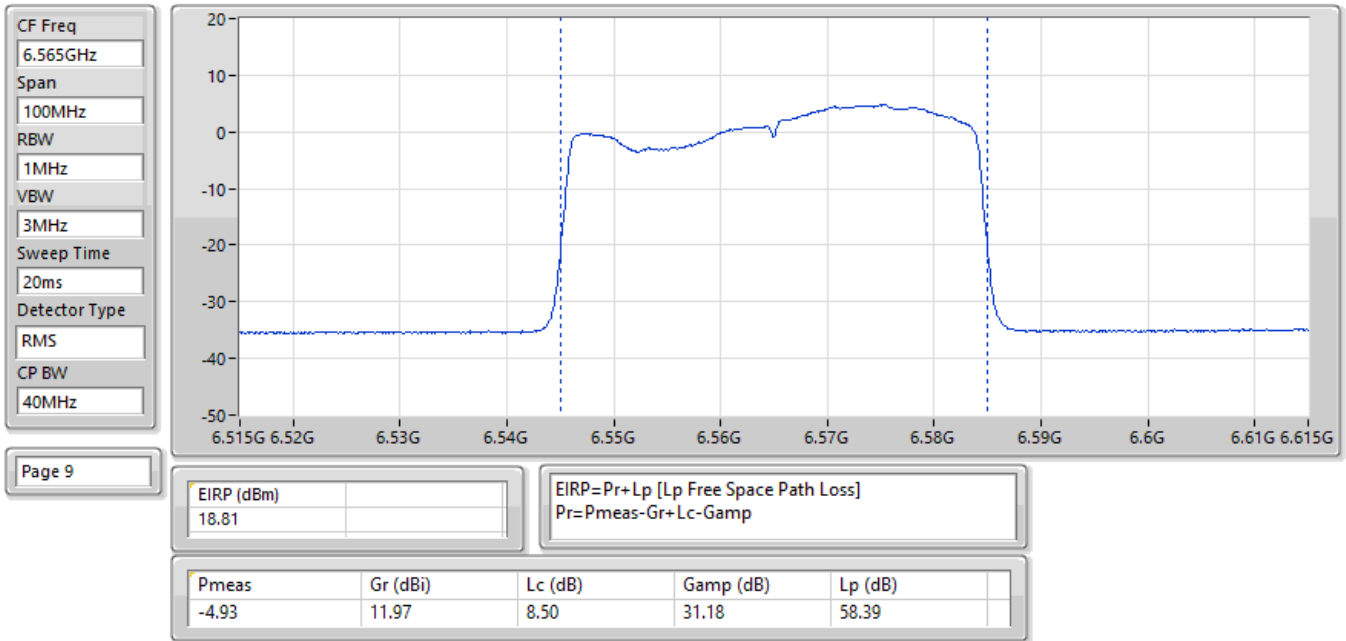


27/02/2025

EIRP:Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6685MHz;TX

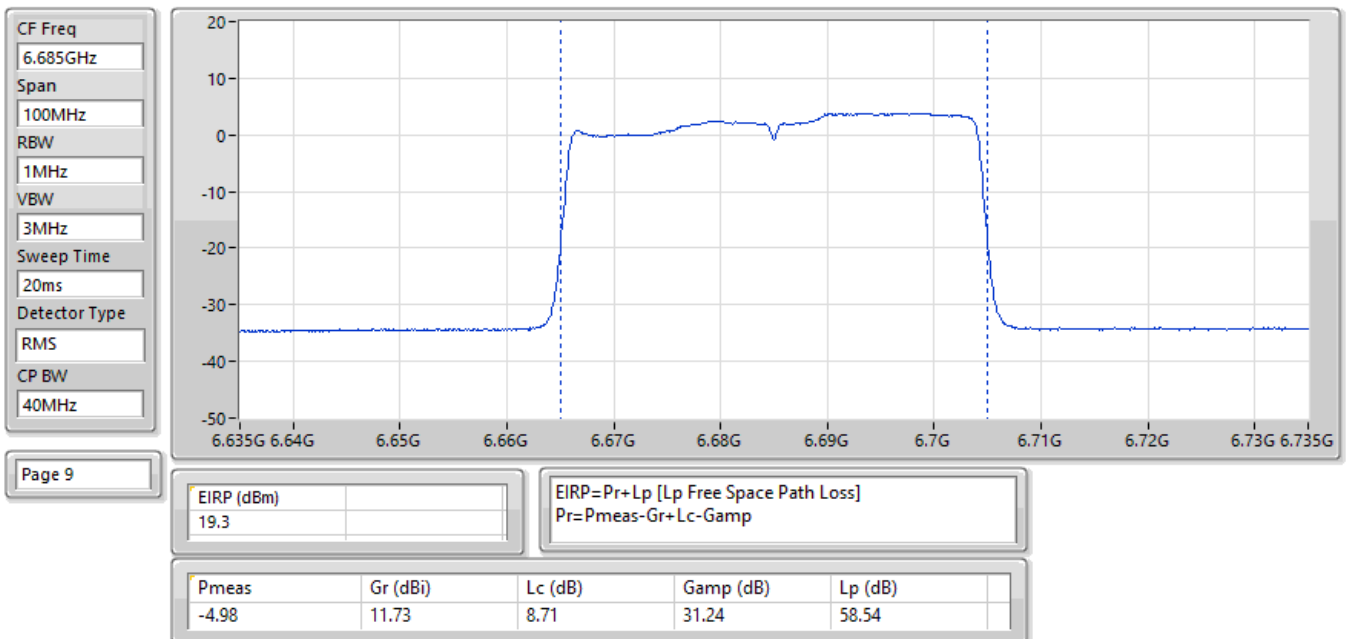


27/02/2025

EIRP:Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6885MHz;TX

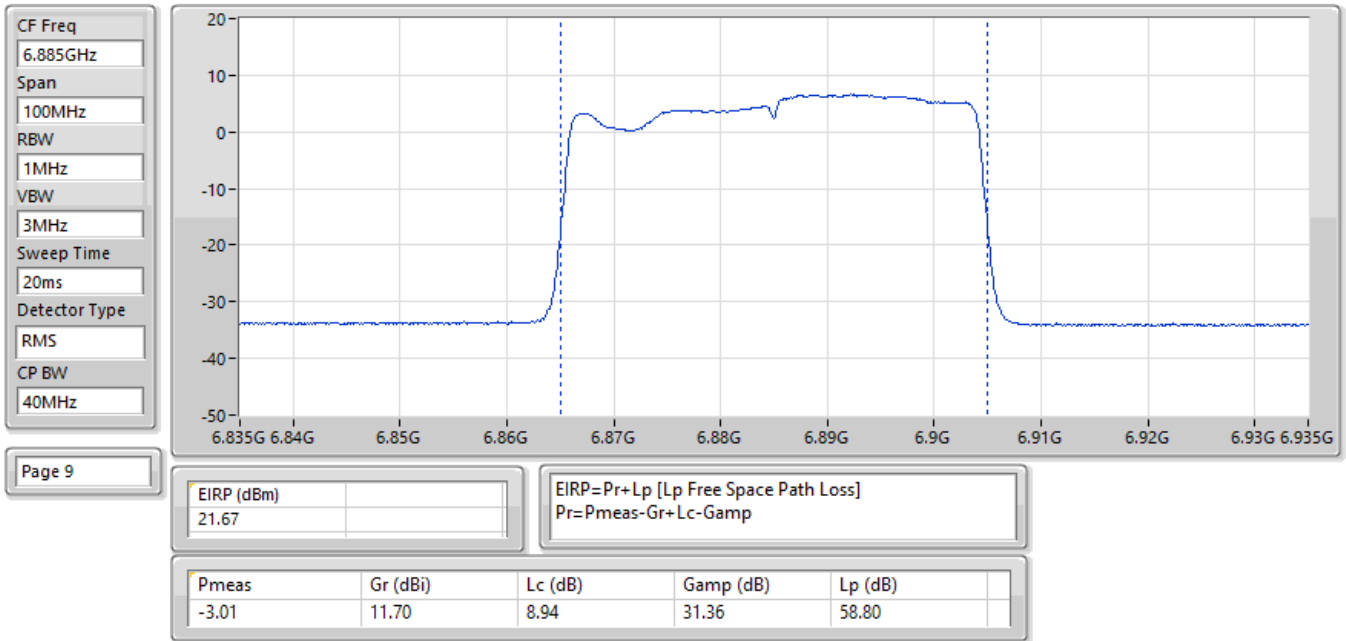


27/02/2025

EIRP:Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6925MHz;TX

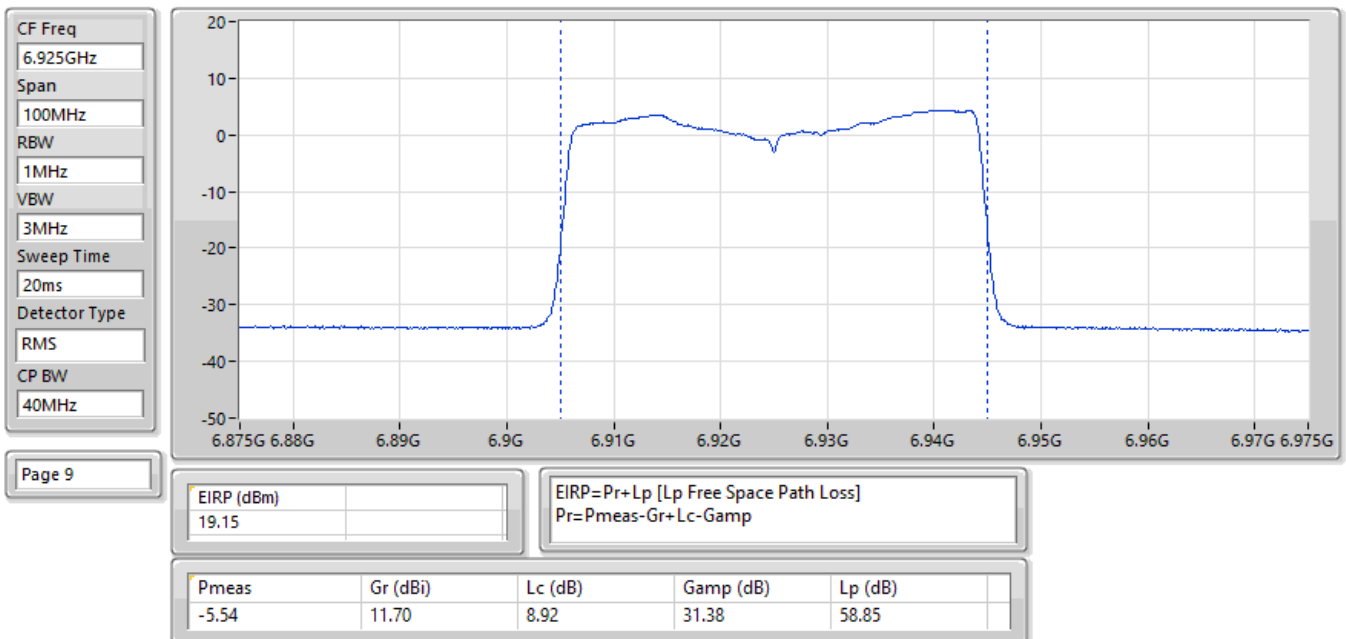


27/02/2025

EIRP:Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:7005MHz;TX

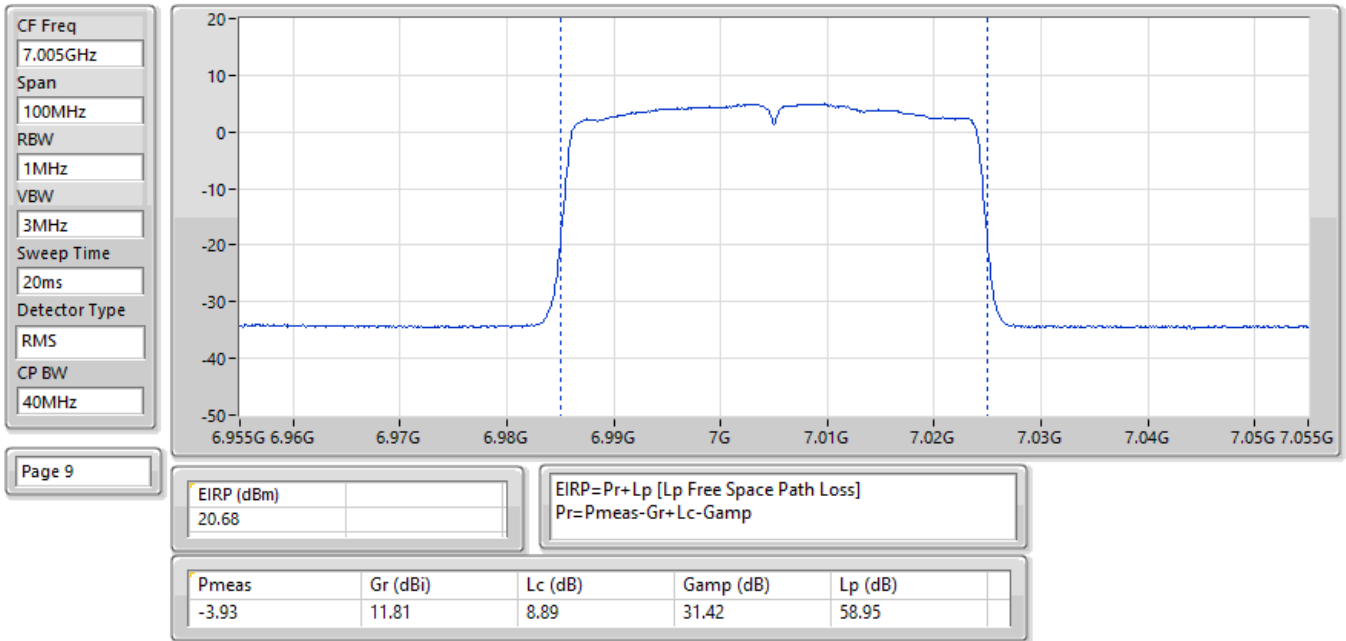


27/02/2025

EIRP:Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:7085MHz;TX

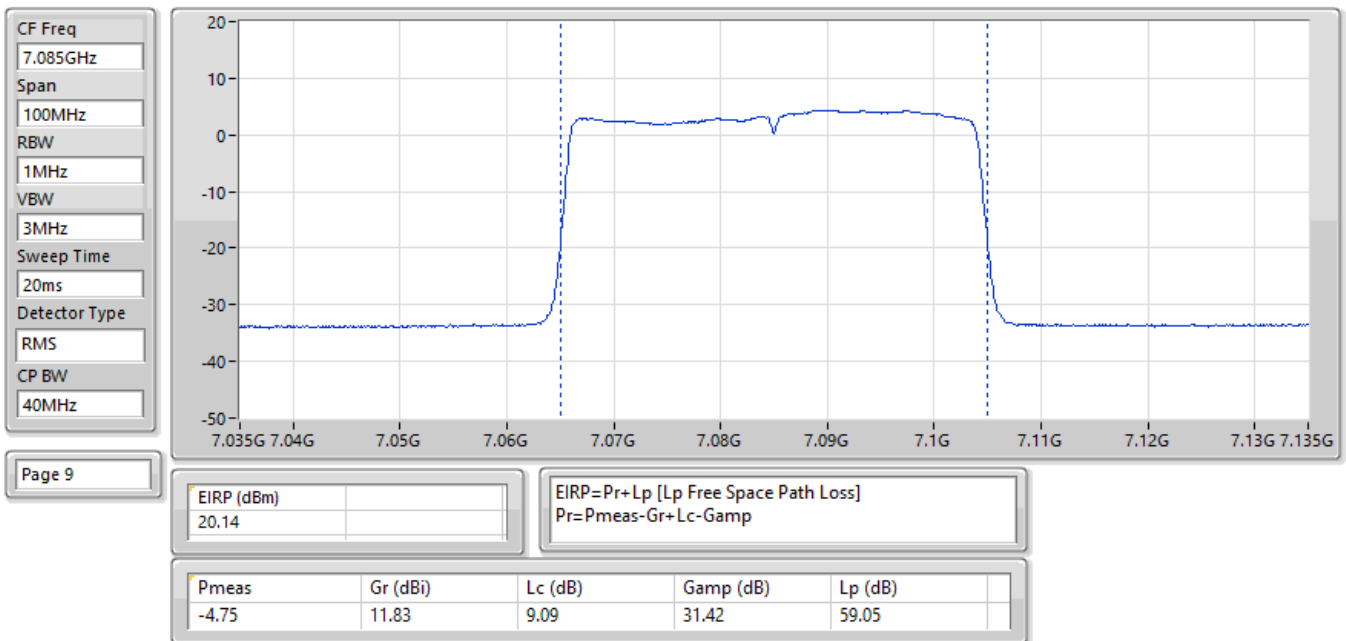


27/02/2025

EIRP:Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:5985MHz;TX

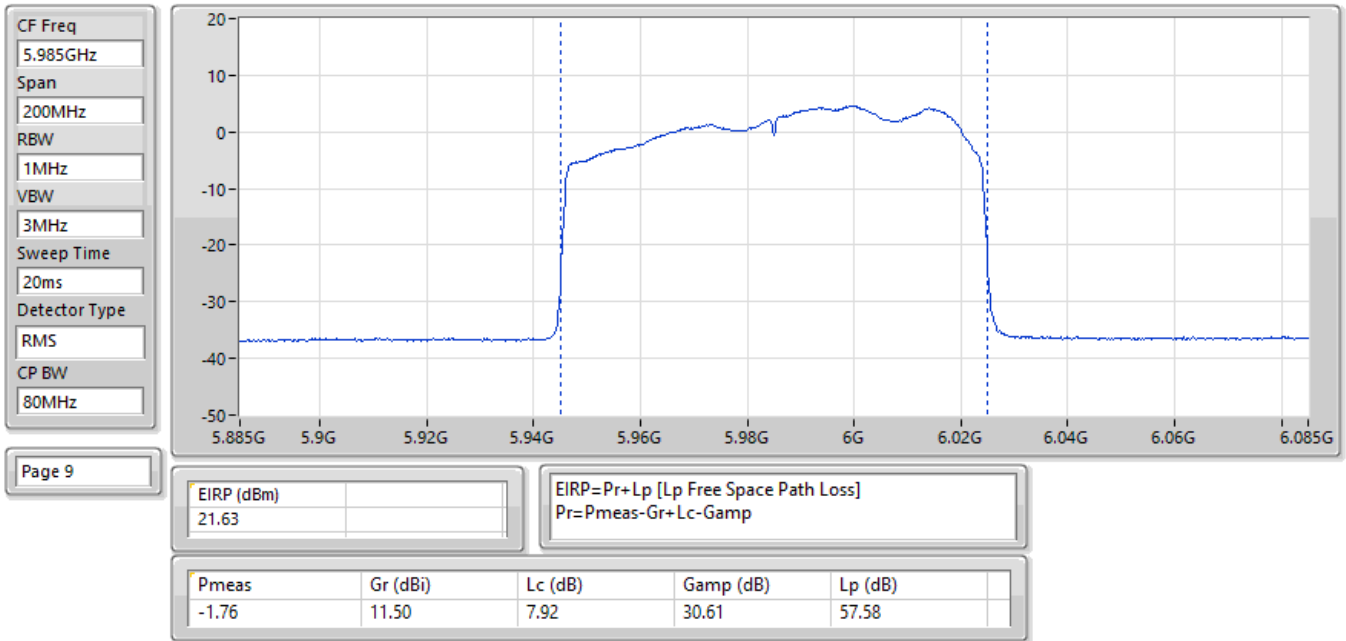


27/02/2025

EIRP:Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6225MHz;TX

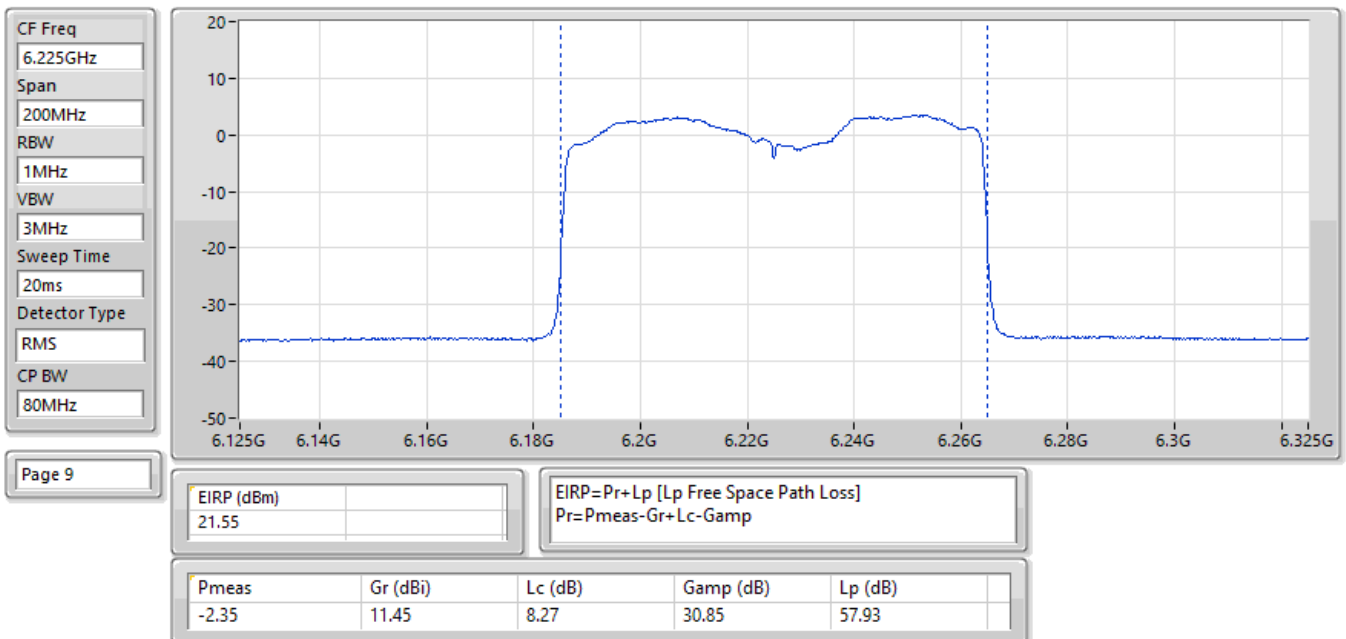


27/02/2025

EIRP:Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6385MHz;TX

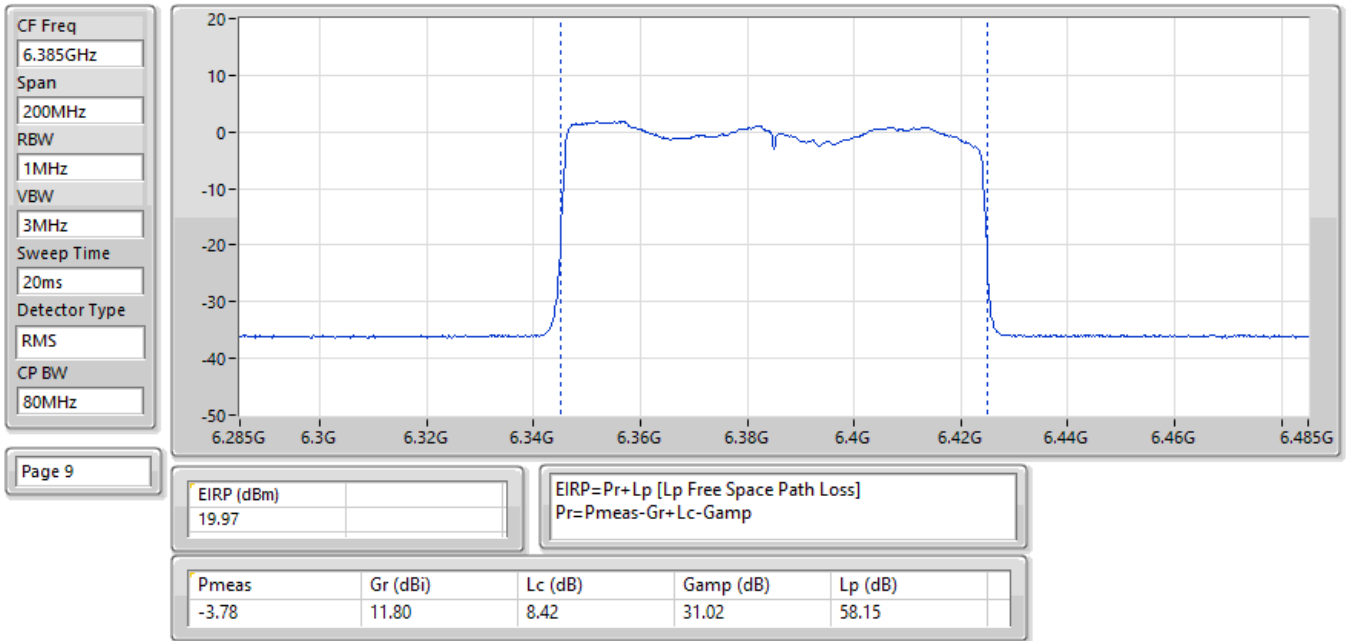


27/02/2025

EIRP:Band:6.4G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6465MHz;TX

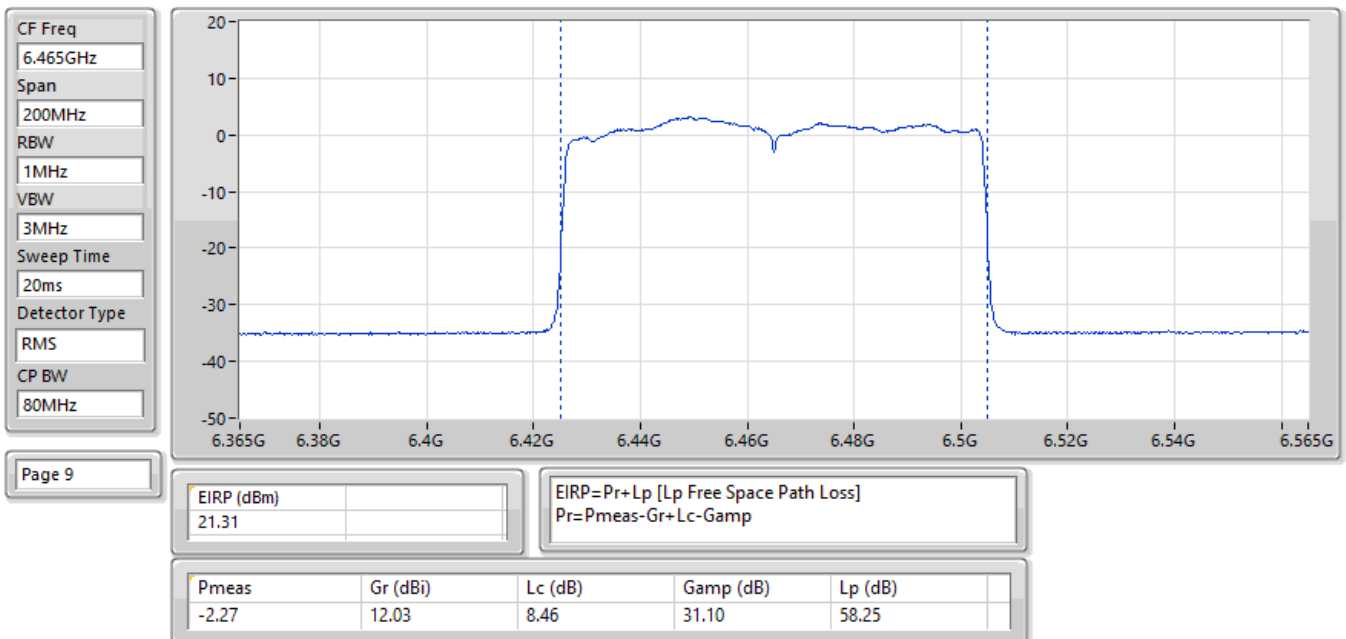


27/02/2025

EIRP:Band:6.4G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6545MHz;TX

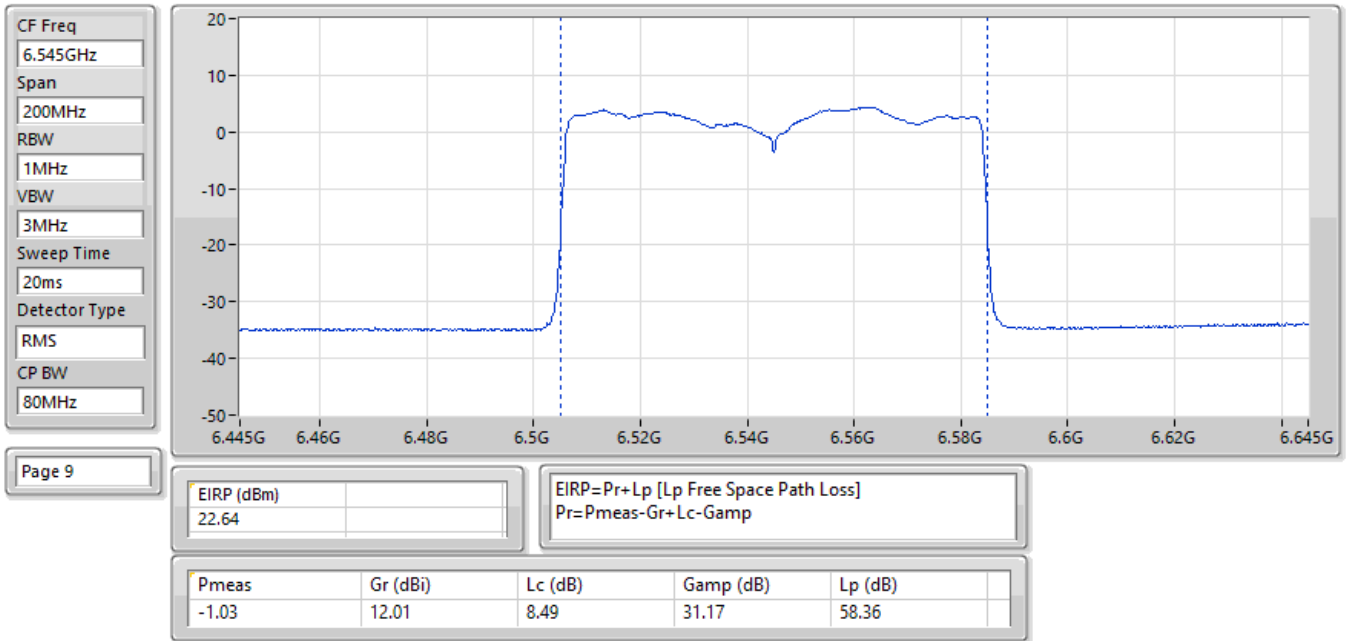


27/02/2025

EIRP:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6625MHz;TX

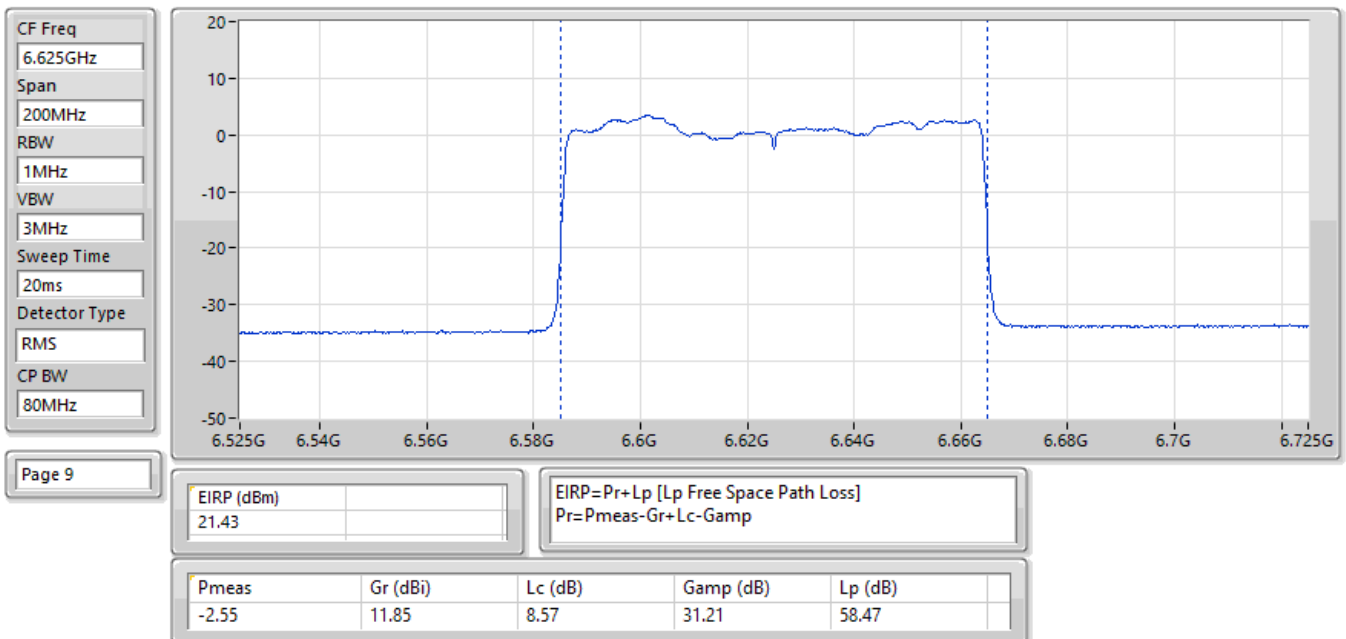


27/02/2025

EIRP:Band:6.7G;be80,8F;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6705MHz;TX

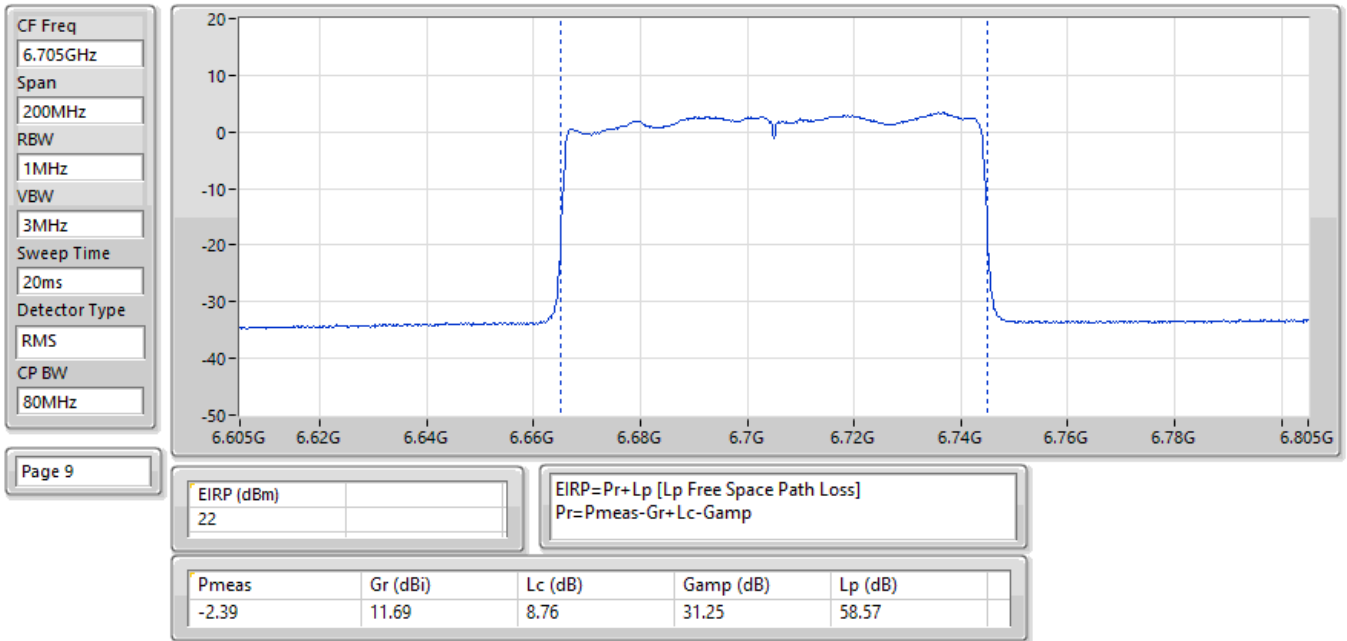


27/02/2025

EIRP:Band:6.7G;be80,8F;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6785MHz;TX

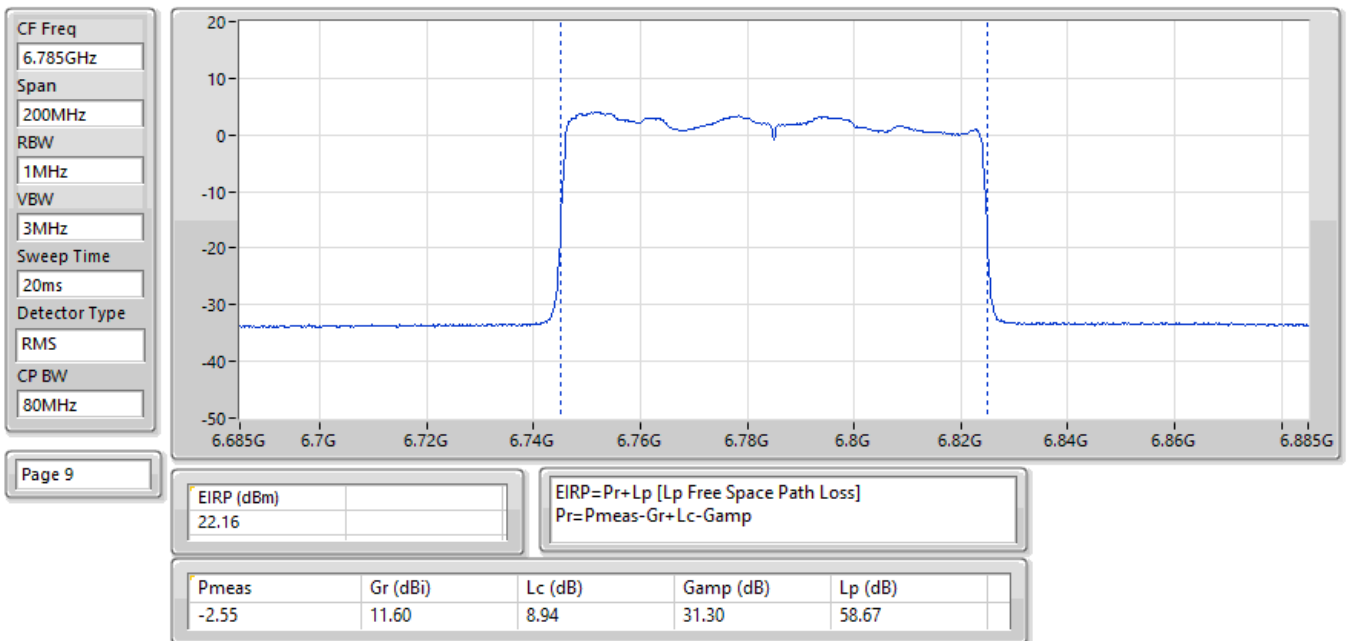


27/02/2025

EIRP:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6865MHz;TX

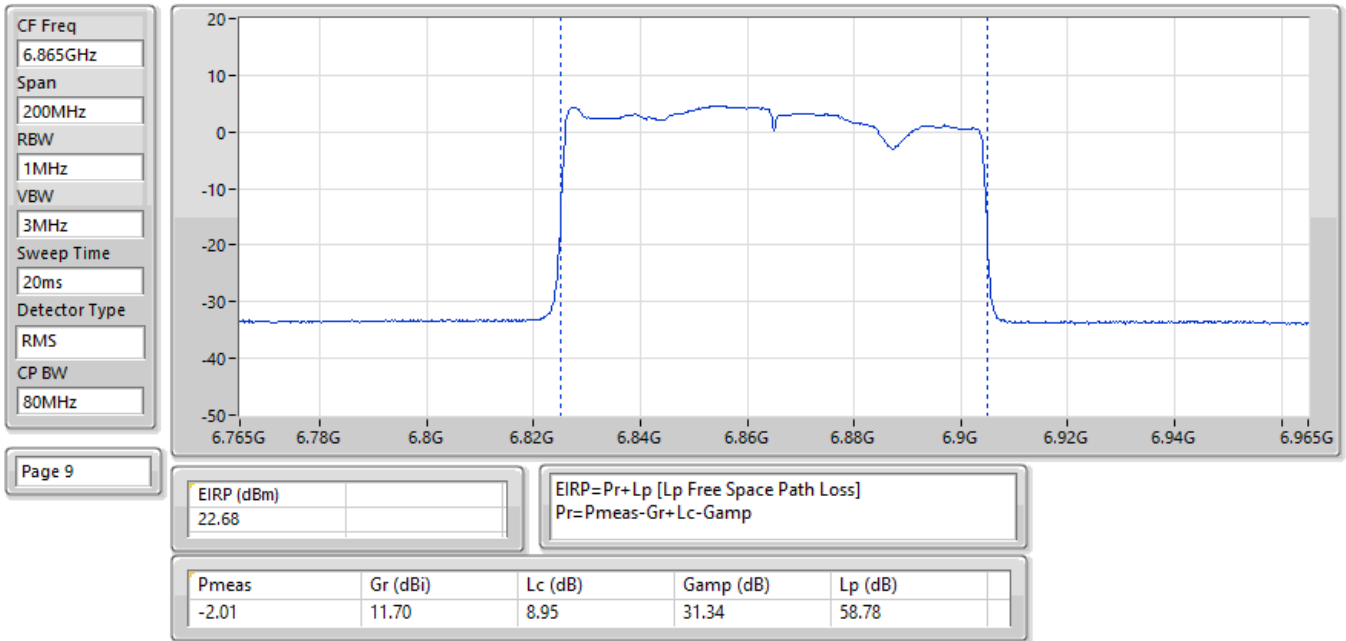


27/02/2025

EIRP:Band:7.0G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6945MHz;TX

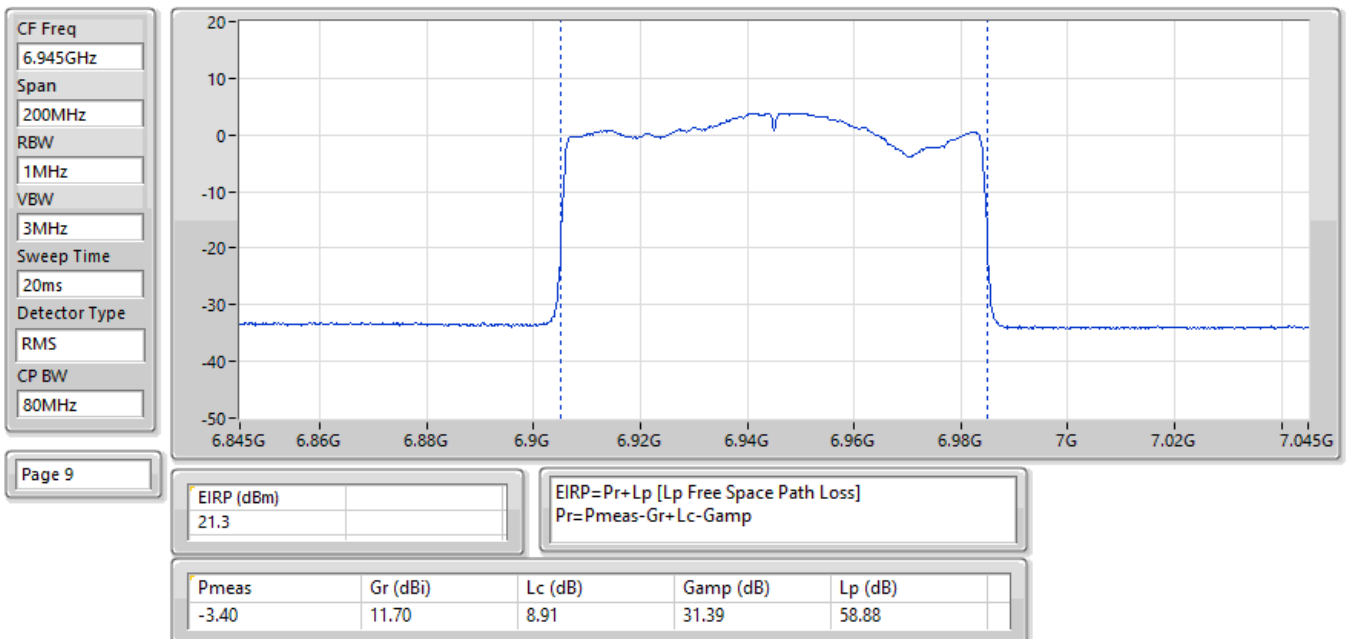


27/02/2025

EIRP;Band:7.0G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:7025MHz;TX

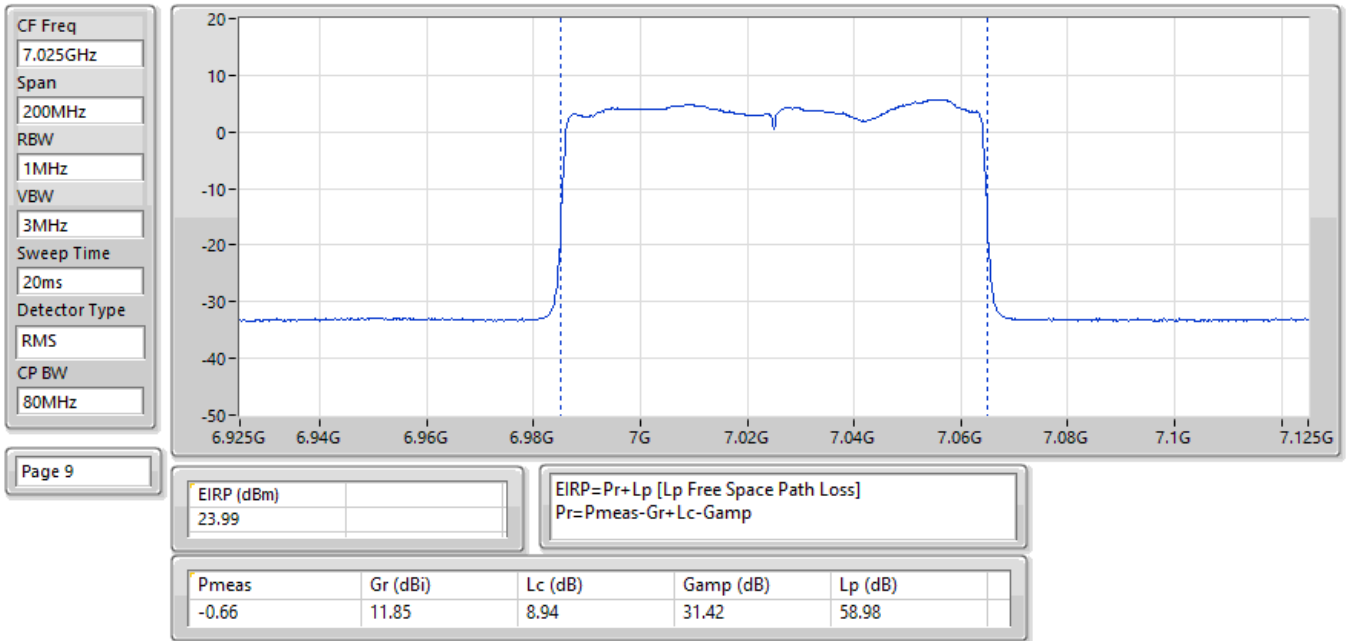


28/02/2025

EIRP;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6025MHz;TX

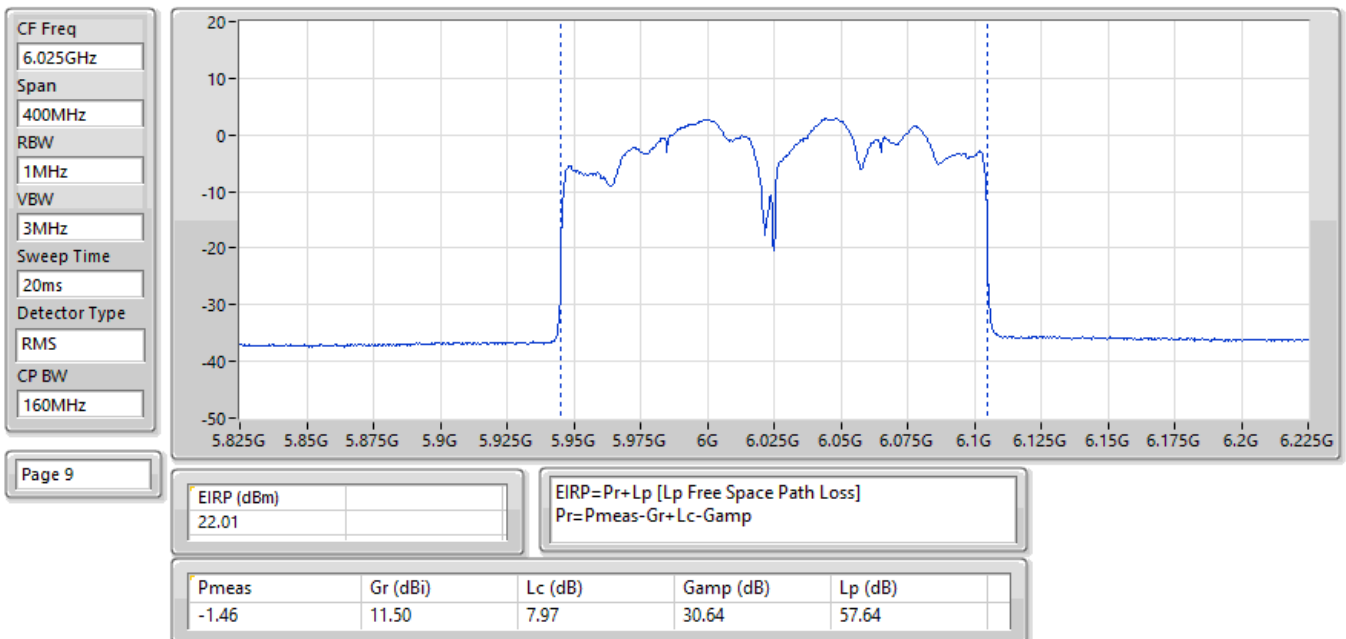


27/02/2025

EIRP;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6185MHz;TX

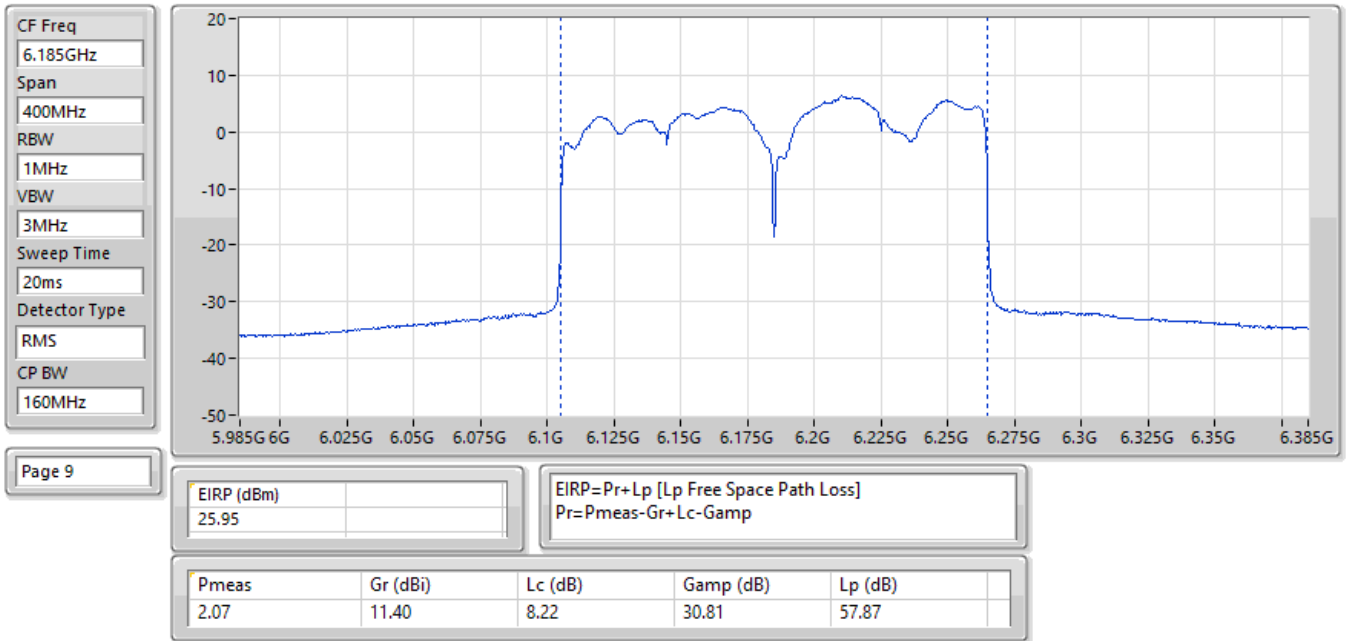


27/02/2025

EIRP;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6345MHz;TX

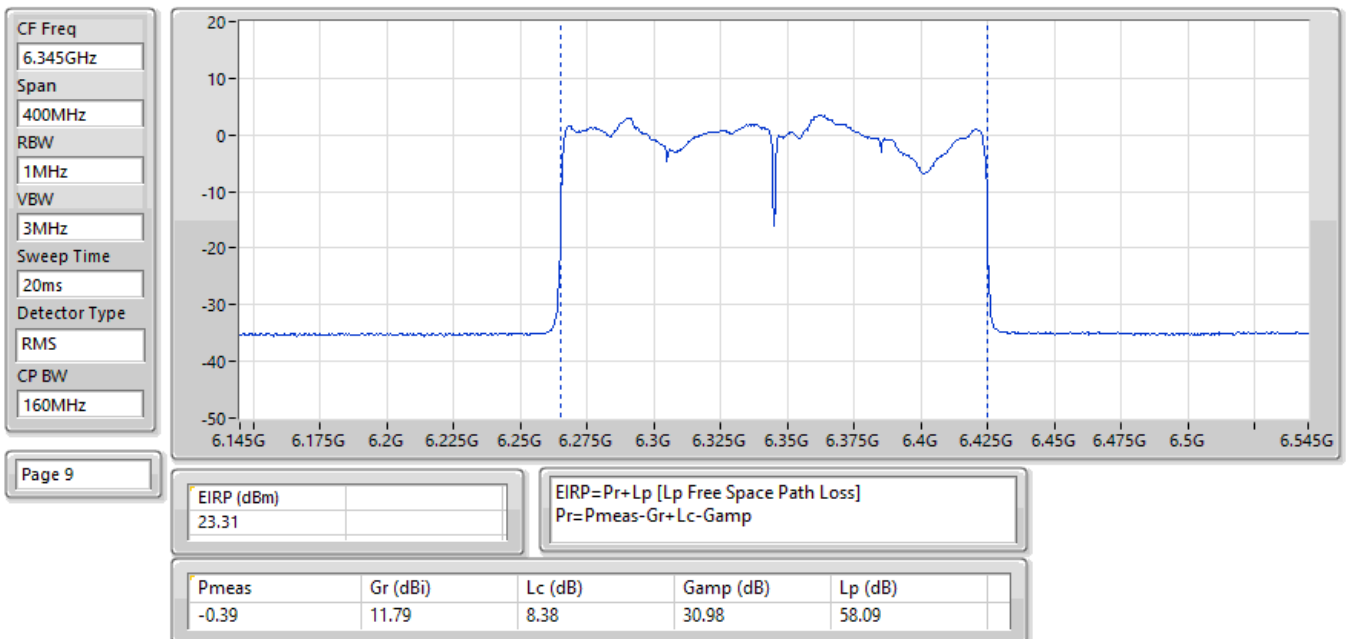


27/02/2025

EIRP;Band:6.4G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6505MHz;TX

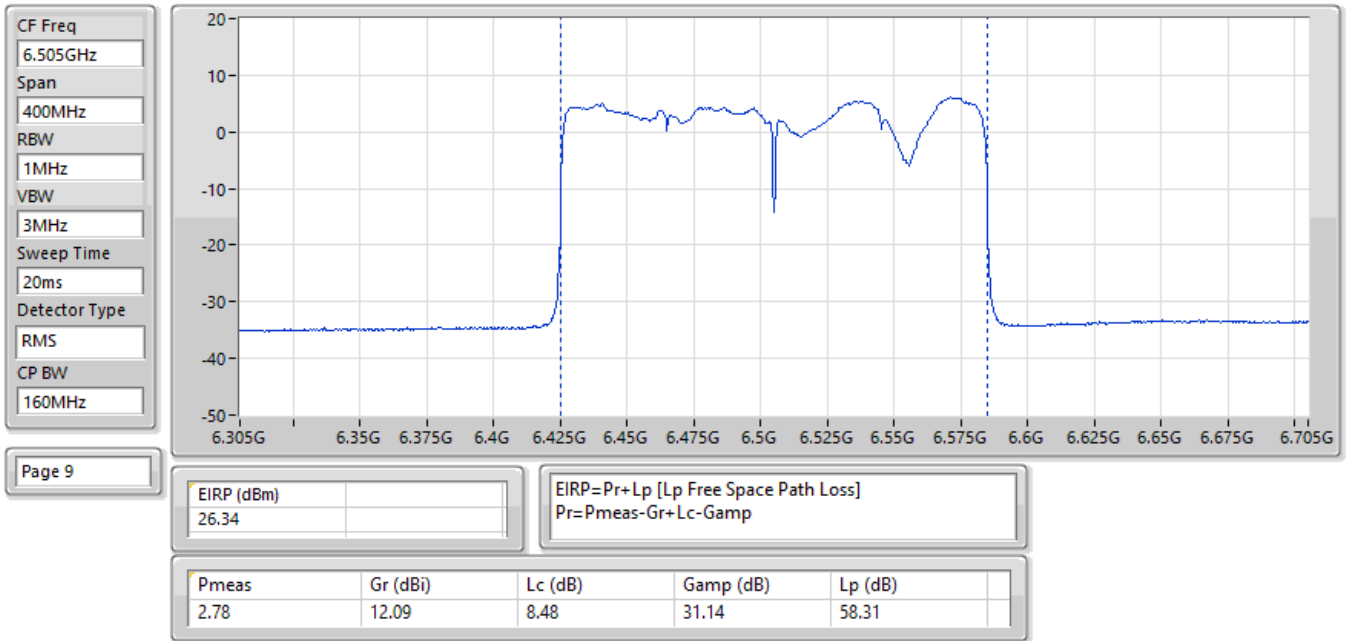


28/02/2025

EIRP;Band:6.7G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6665MHz;TX

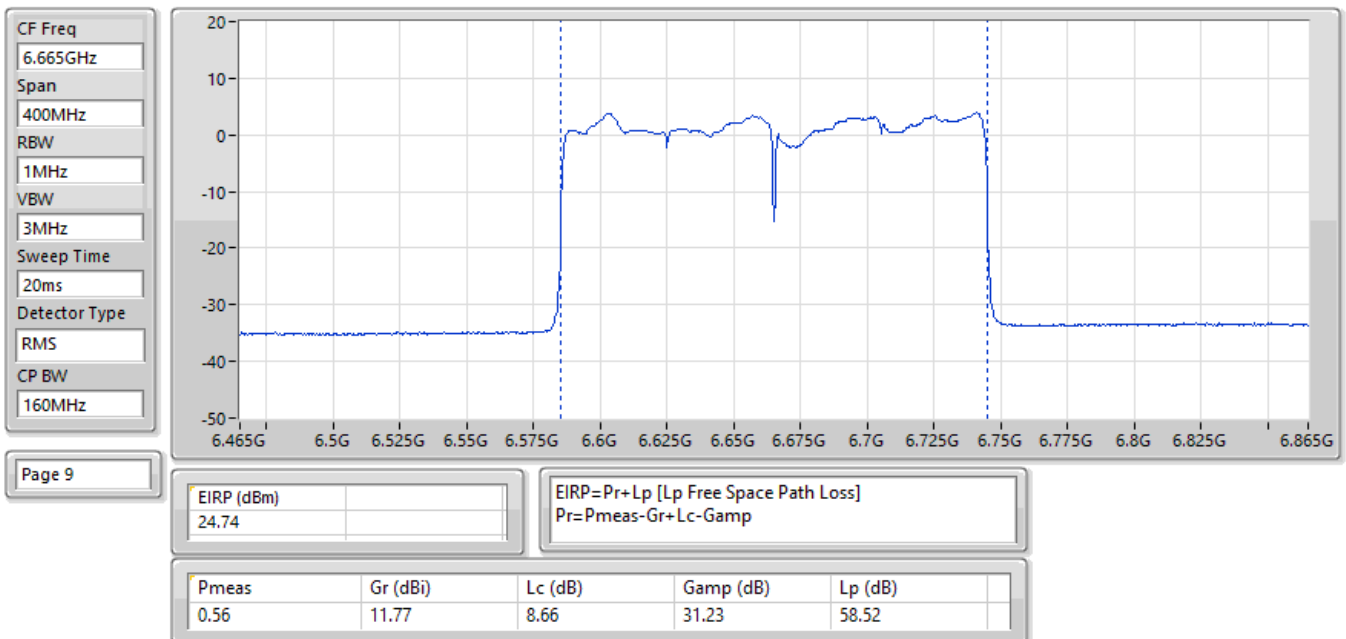


28/02/2025

EIRP;Band:6.7G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6825MHz;TX

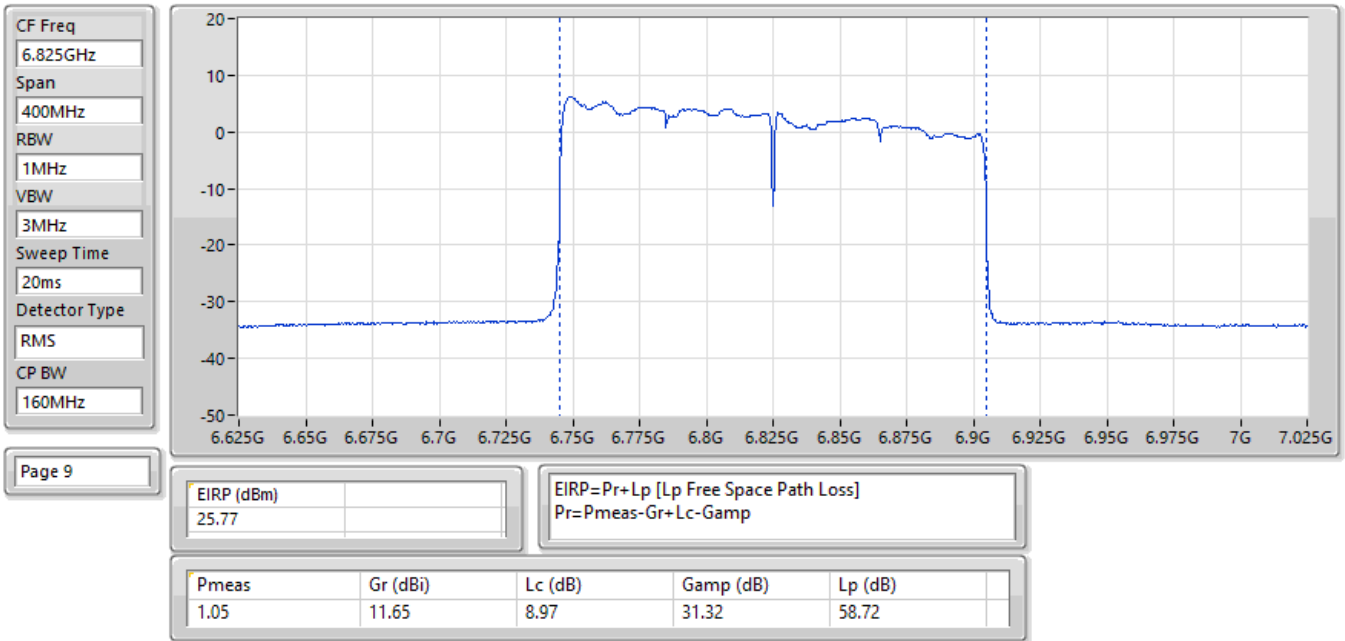


28/02/2025

EIRP;Band:7.0G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6985MHz;TX

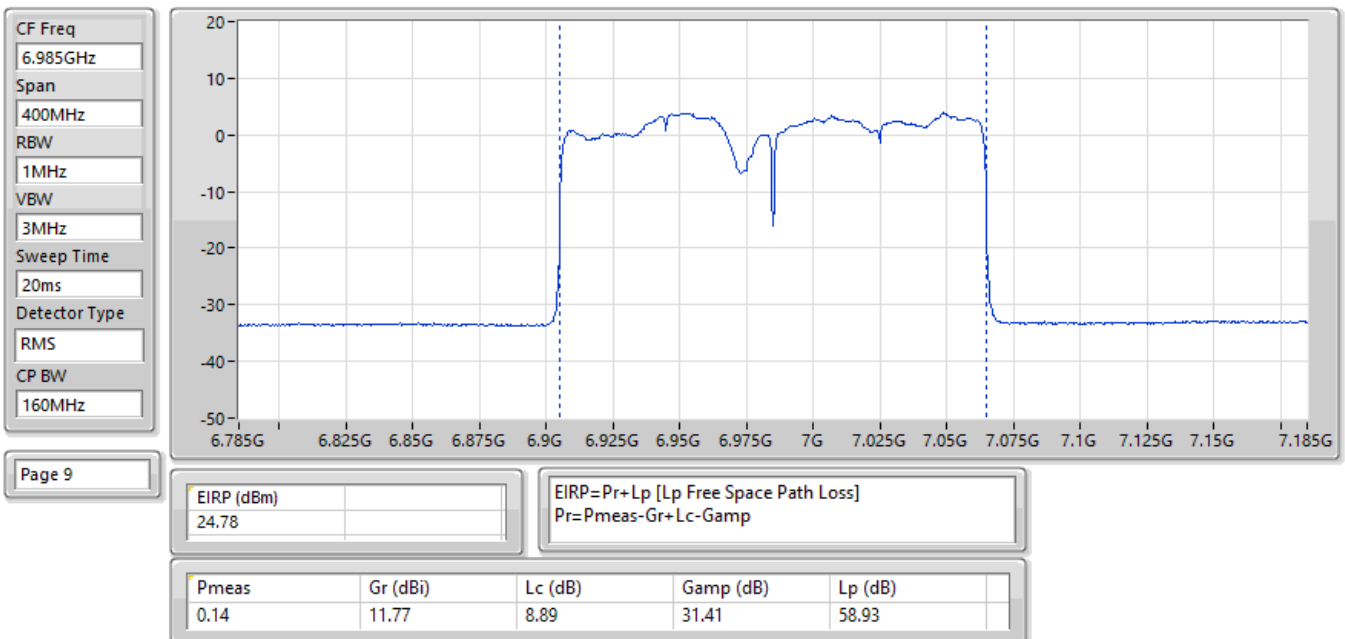


28/02/2025

EIRP;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6105MHz;TX

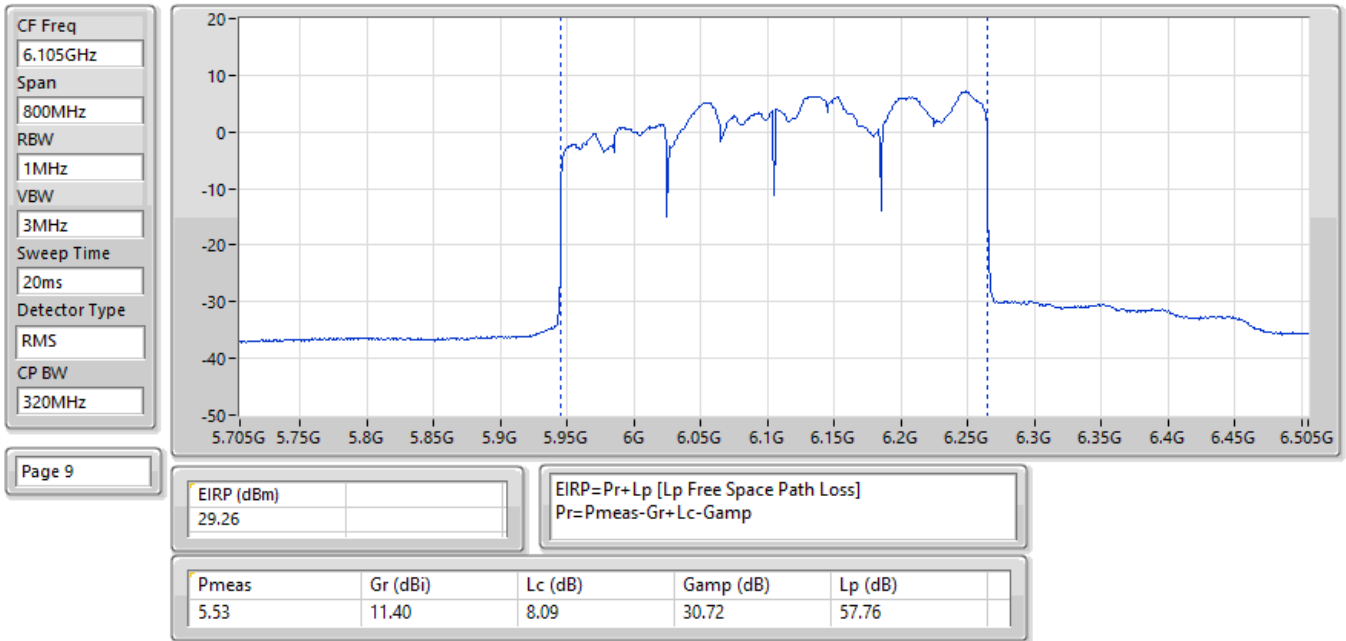


27/02/2025

EIRP;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6265MHz;TX

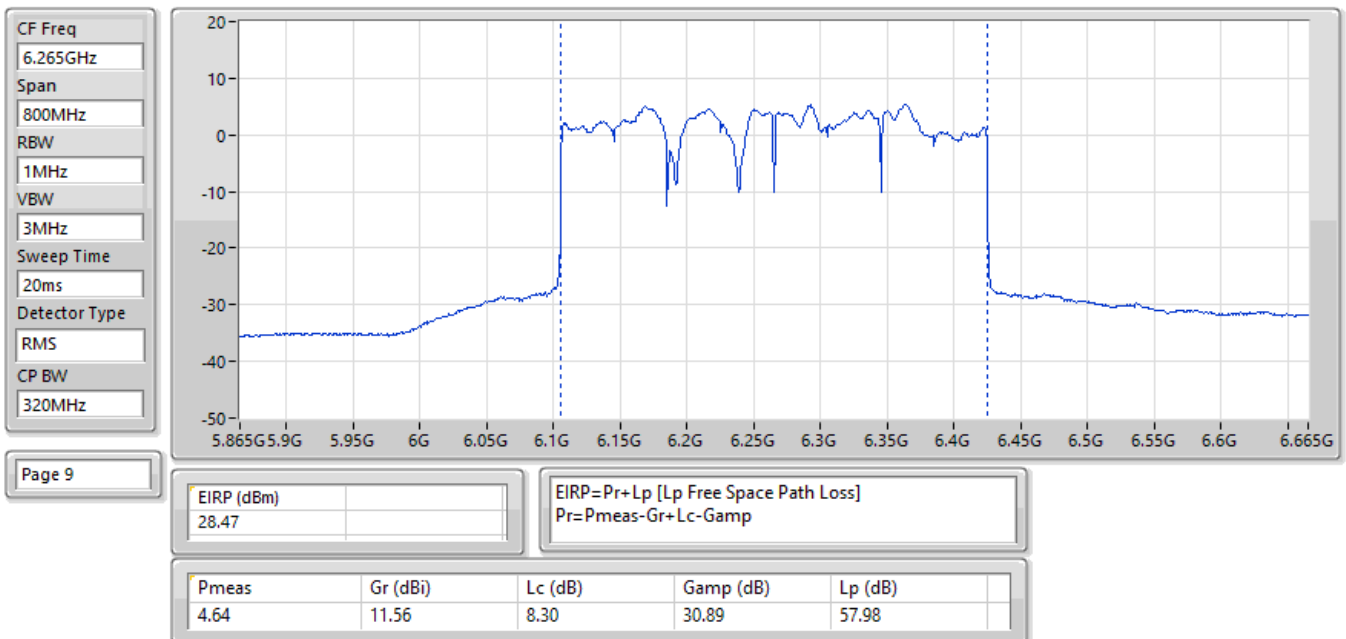


28/02/2025

EIRP;Band:6.4G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6585MHz;TX

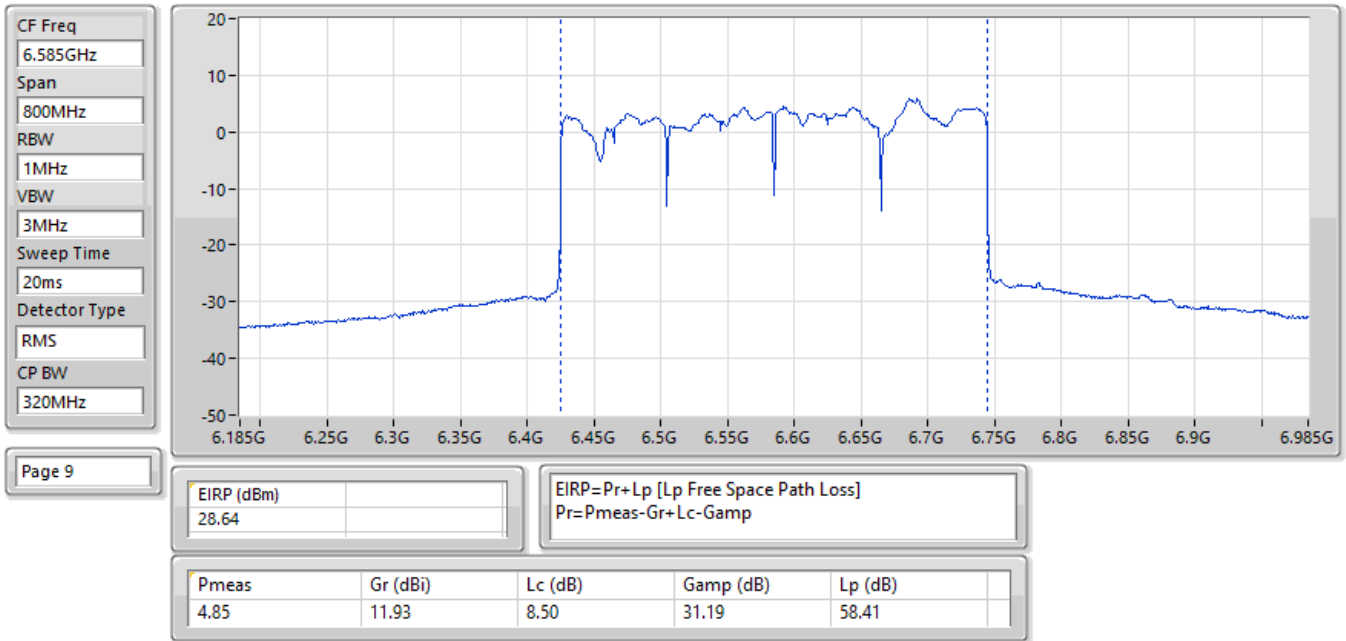


28/02/2025

EIRP;Band:6.7G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6745MHz;TX

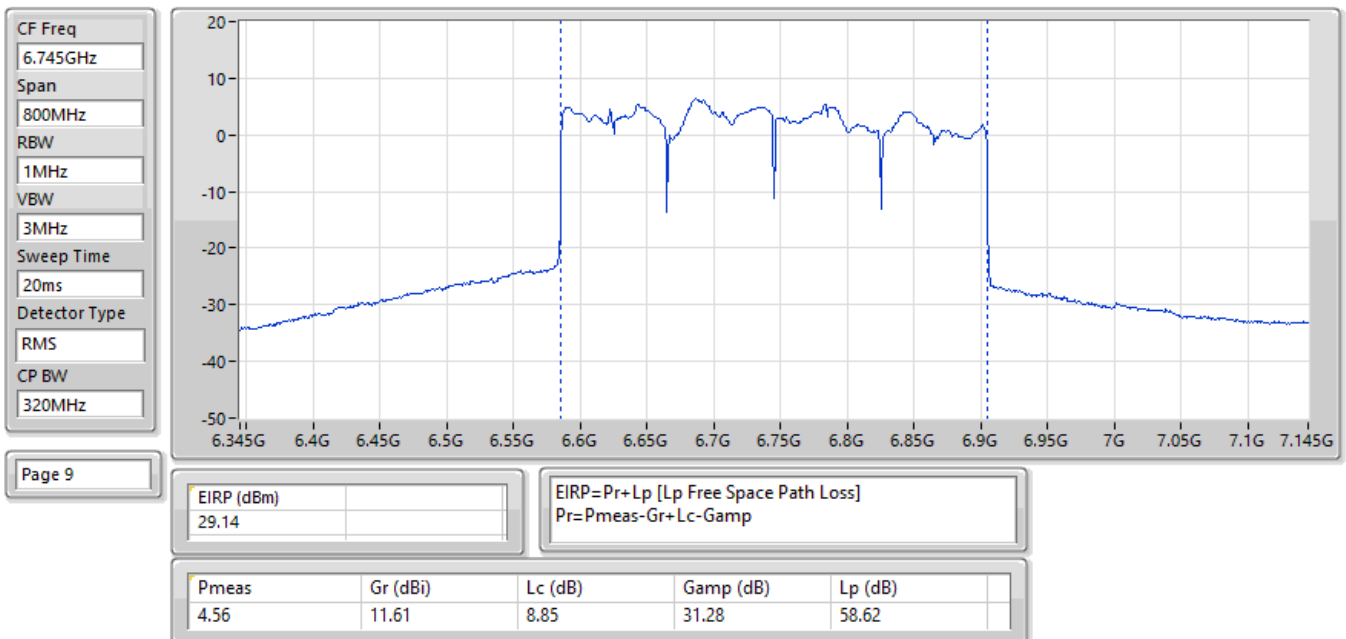

28/02/2025

EIRP;Band:6.7G;be320,8F;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6905MHz;TX

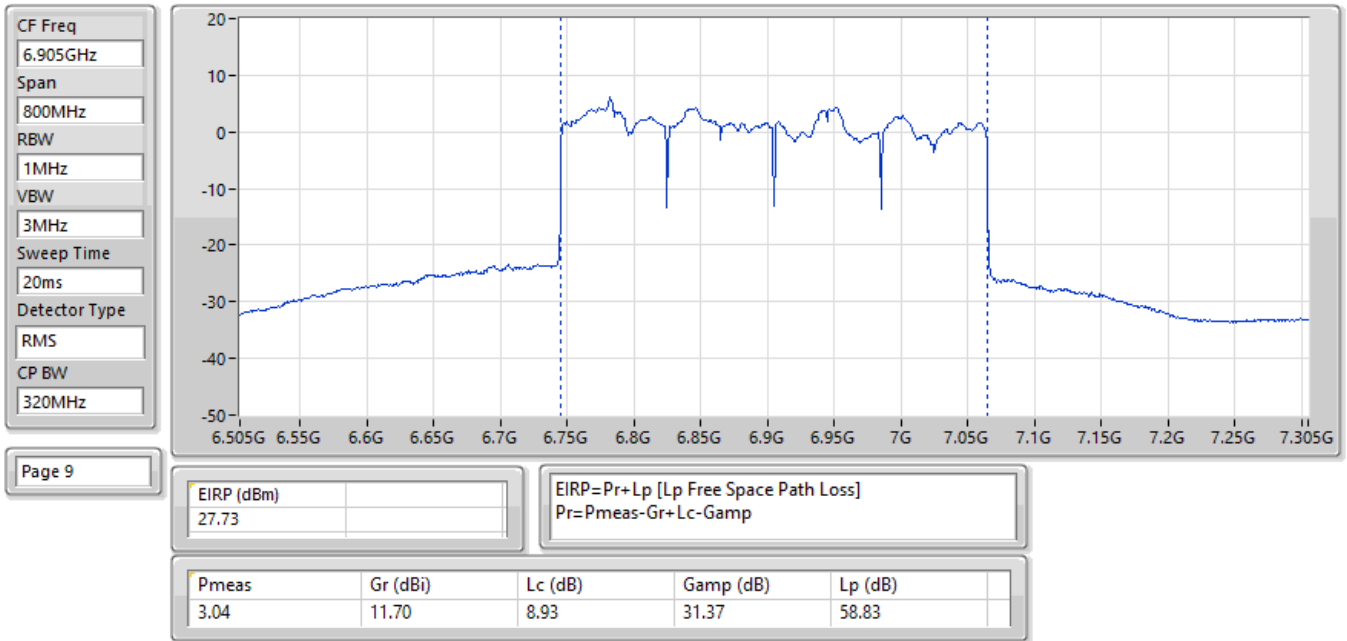

Test Mode: Mode 3

Summary

Mode	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	30.02	1.00462
802.11be EHT20-BF_Nss1,(MCS0)_4TX	32.33	1.71002
802.11be EHT40_Nss1,(MCS0)_4TX	31.66	1.46555
802.11be EHT40-BF_Nss1,(MCS0)_4TX	33.76	2.37684
802.11be EHT80_Nss1,(MCS0)_4TX	28.87	0.77090
802.11be EHT80-BF_Nss1,(MCS0)_4TX	31.97	1.57398
802.11be EHT160_Nss1,(MCS0)_4TX	27.65	0.58210
802.11be EHT160-BF_Nss1,(MCS0)_4TX	33.67	2.32809
802.11be EHT320_Nss1,(MCS0)_4TX	29.36	0.86298
802.11be EHT320-BF_Nss1,(MCS0)_4TX	35.75	3.75837
6.525-6.875GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	30.55	1.13501
802.11be EHT20-BF_Nss1,(MCS0)_4TX	33.22	2.09894
802.11be EHT40_Nss1,(MCS0)_4TX	29.99	0.99770
802.11be EHT40-BF_Nss1,(MCS0)_4TX	32.64	1.83654
802.11be EHT80_Nss1,(MCS0)_4TX	28.83	0.76384
802.11be EHT80-BF_Nss1,(MCS0)_4TX	33.82	2.40991
802.11be EHT160_Nss1,(MCS0)_4TX	26.32	0.42855
802.11be EHT160-BF_Nss1,(MCS0)_4TX	32.98	1.98609

Result

Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-
5955MHz	Pass	29.73	36.00
6195MHz	Pass	30.02	36.00
6415MHz	Pass	27.63	36.00
6535MHz	Pass	28.15	36.00
6695MHz	Pass	30.55	36.00
6855MHz	Pass	29.15	36.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-
5965MHz	Pass	28.56	36.00
6205MHz	Pass	31.66	36.00
6405MHz	Pass	27.61	36.00
6565MHz	Pass	29.99	36.00
6685MHz	Pass	28.98	36.00
6845MHz	Pass	26.98	36.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-
5985MHz	Pass	26.66	36.00
6225MHz	Pass	28.87	36.00
6385MHz	Pass	26.43	36.00
6625MHz	Pass	28.52	36.00
6705MHz	Pass	28.83	36.00
6785MHz	Pass	27.95	36.00
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-
6025MHz	Pass	27.40	36.00
6185MHz	Pass	27.56	36.00
6345MHz	Pass	27.65	36.00
6665MHz	Pass	26.32	36.00
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-
6105MHz	Pass	29.36	36.00
6265MHz	Pass	28.65	36.00
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-
5955MHz	Pass	30.59	36.00
6195MHz	Pass	32.33	36.00
6415MHz	Pass	30.12	36.00
6535MHz	Pass	30.77	36.00
6695MHz	Pass	31.32	36.00
6855MHz	Pass	33.22	36.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-
5965MHz	Pass	30.13	36.00
6205MHz	Pass	33.76	36.00
6405MHz	Pass	30.43	36.00
6565MHz	Pass	31.74	36.00
6685MHz	Pass	32.64	36.00
6845MHz	Pass	30.83	36.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-
5985MHz	Pass	30.97	36.00
6225MHz	Pass	31.97	36.00
6385MHz	Pass	30.18	36.00
6625MHz	Pass	32.56	36.00
6705MHz	Pass	31.21	36.00
6785MHz	Pass	33.82	36.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-
6025MHz	Pass	33.10	36.00
6185MHz	Pass	33.25	36.00
6345MHz	Pass	33.67	36.00
6665MHz	Pass	32.98	36.00



Radiated EIRP

Appendix B.3

Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-
6105MHz	Pass	35.75	36.00
6265MHz	Pass	35.69	36.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

11/03/2025

EIRP;Band:6.2G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:5955MHz;TX

CF Freq
5.955GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
20MHz

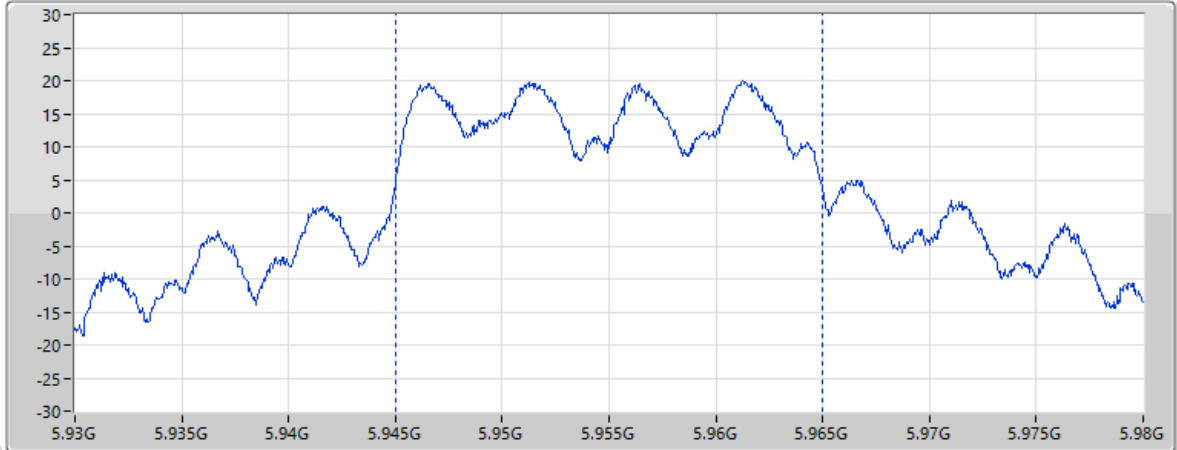

Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
29.73		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
6.41	11.50	7.90	30.62	57.54

25/12/2024

EIRP;Band:6.2G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6195MHz;TX

CF Freq
6.195GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
20MHz

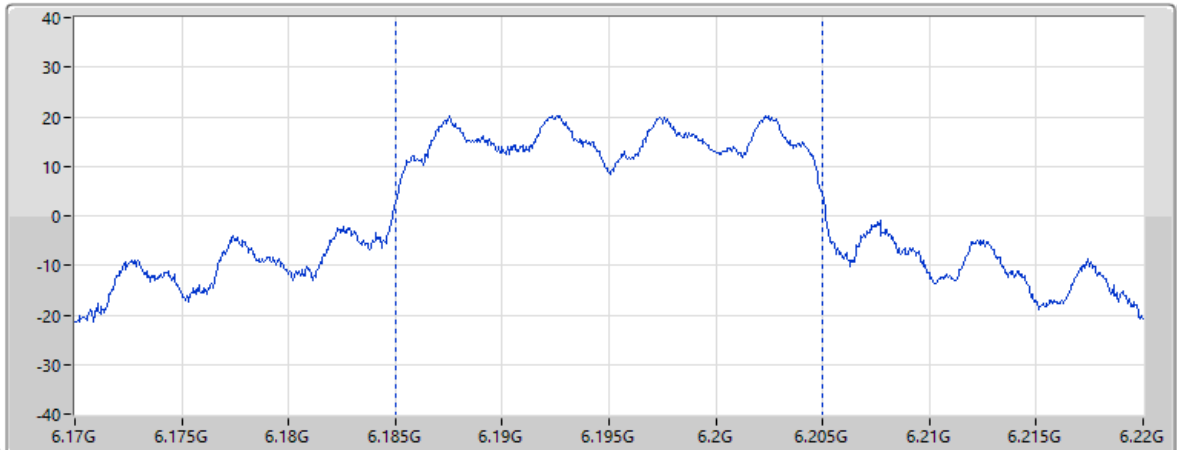

Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
30.02		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
6.13	11.40	8.23	30.82	57.88

11/03/2025

EIRP:Band:6.2G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6415MHz;TX

CF Freq
6.415GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
20MHz

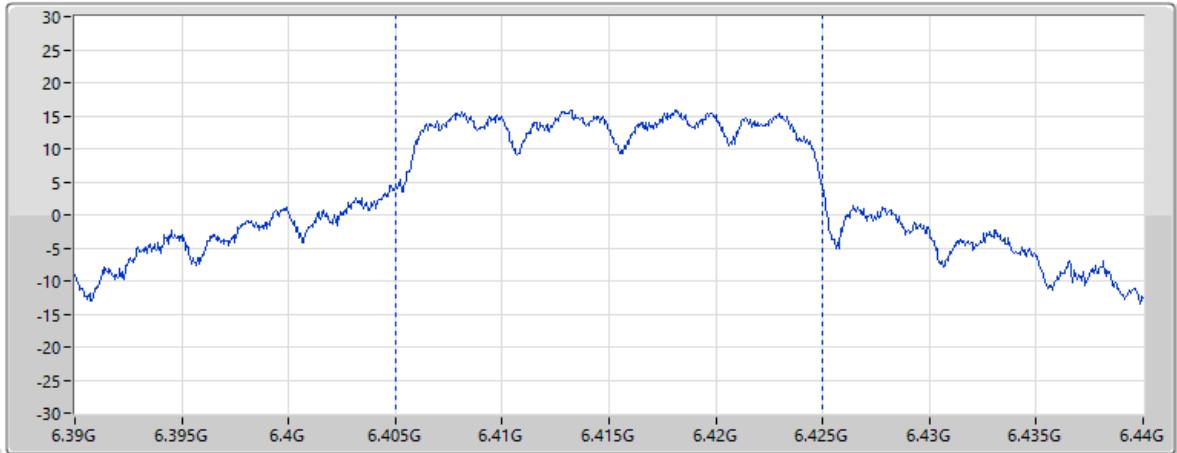

Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
27.63				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
3.90	11.86	8.45	31.05	58.19

12/03/2025

EIRP:Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6535MHz;TX

CF Freq
6.535GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
20MHz

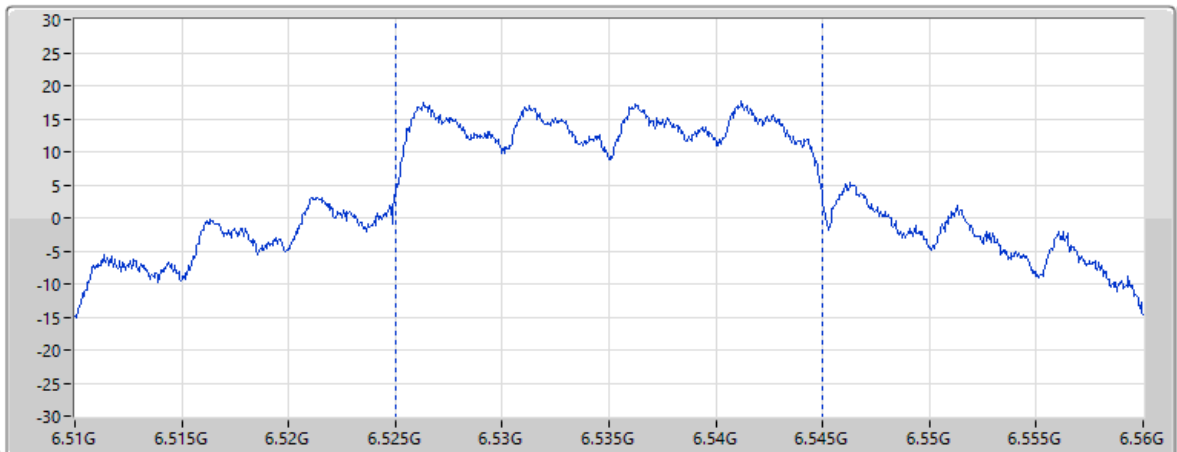


Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
28.15				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
4.50	12.03	8.49	31.16	58.35


25/12/2024

EIRP:Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6695MHz;TX

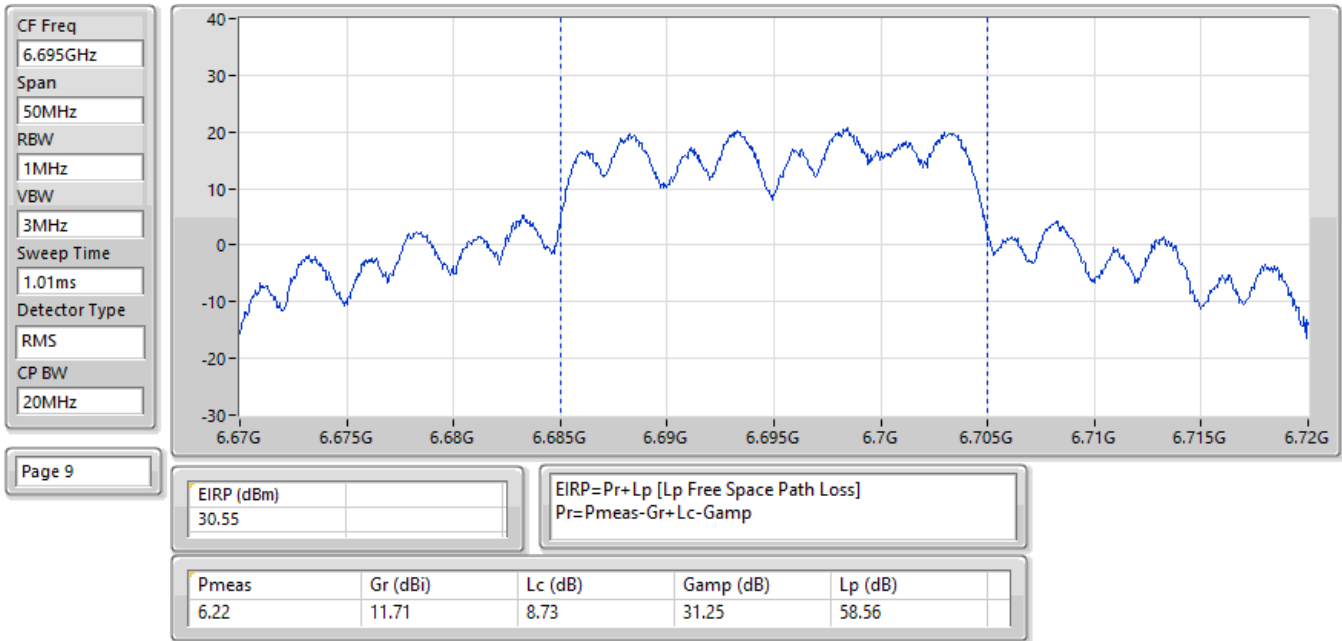


12/03/2025

EIRP:Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6855MHz;TX

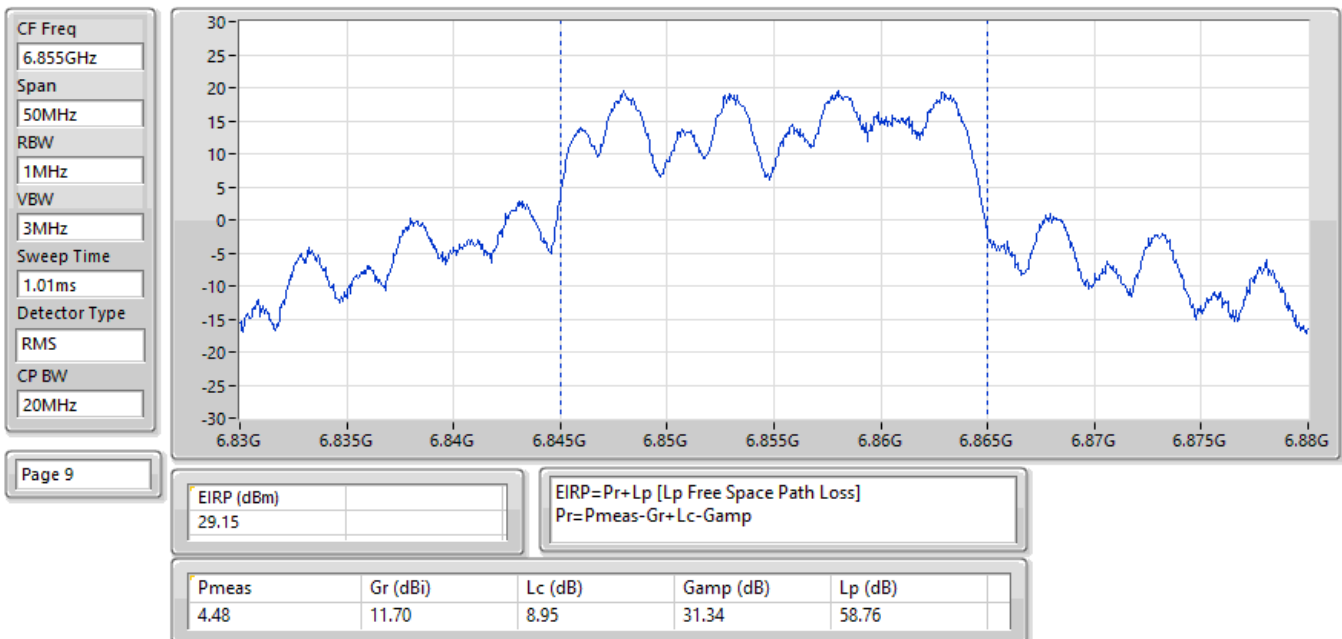


25/12/2024

EIRP:Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:5965MHz;TX

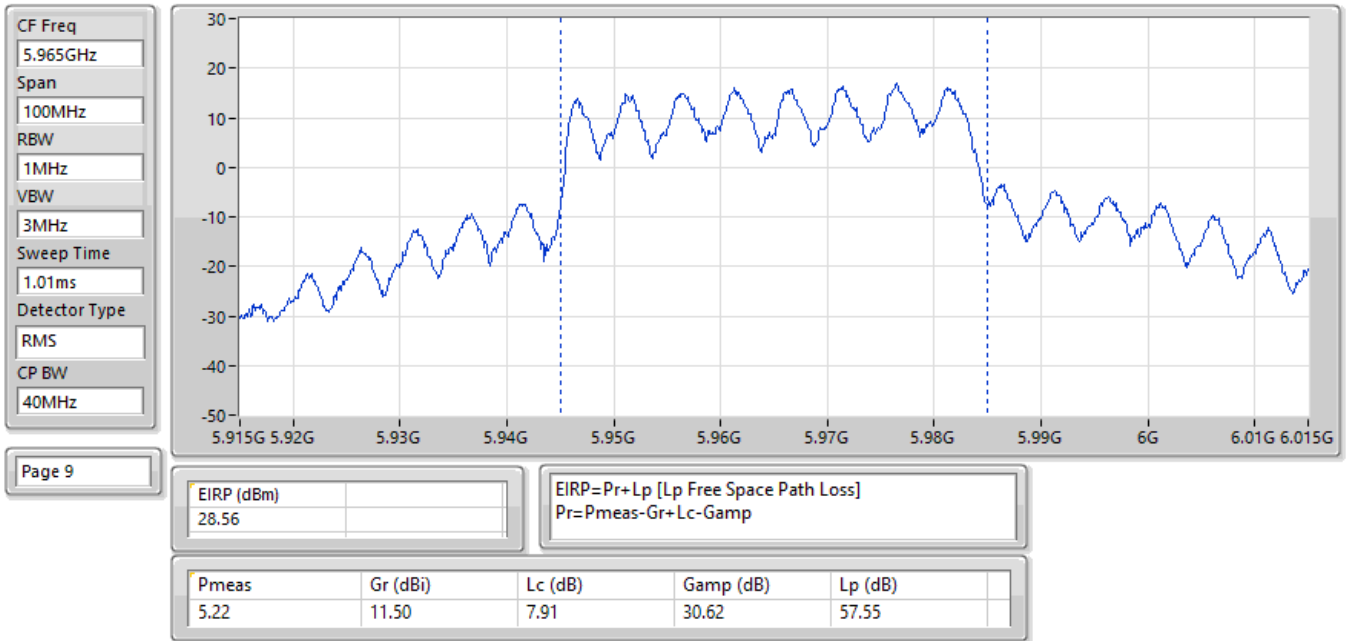


27/12/2024

EIRP:Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6205MHz;TX

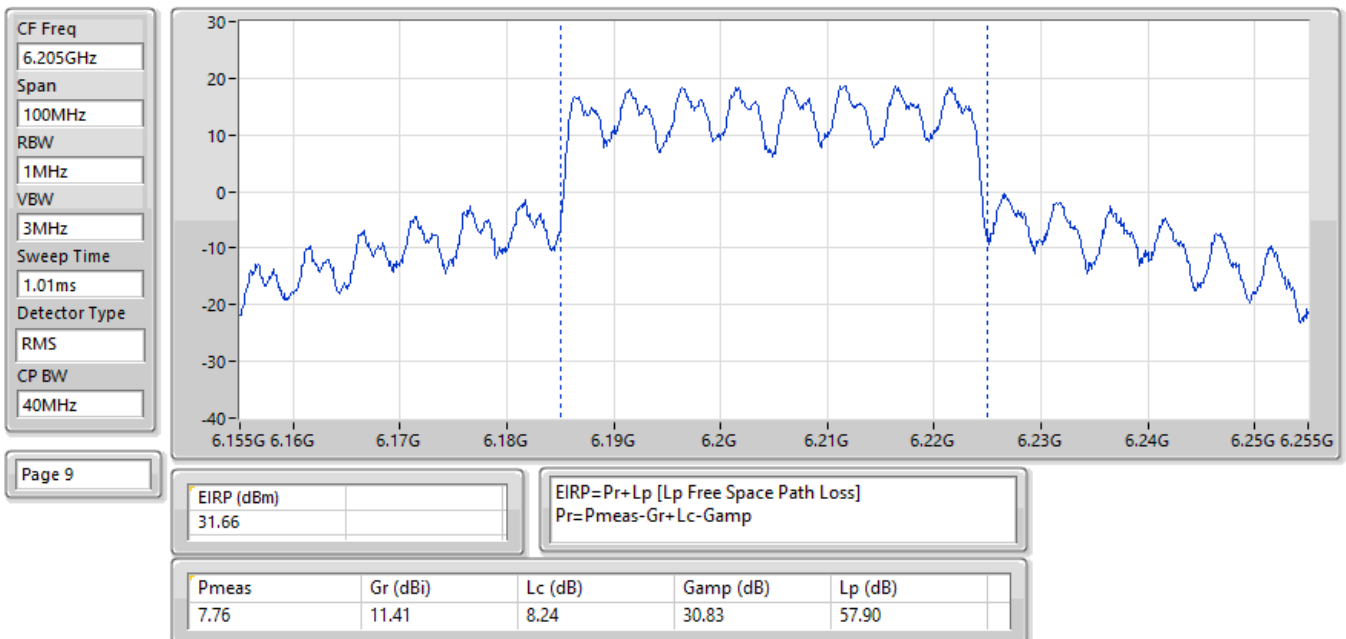


12/03/2025

EIRP:Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6405MHz;TX

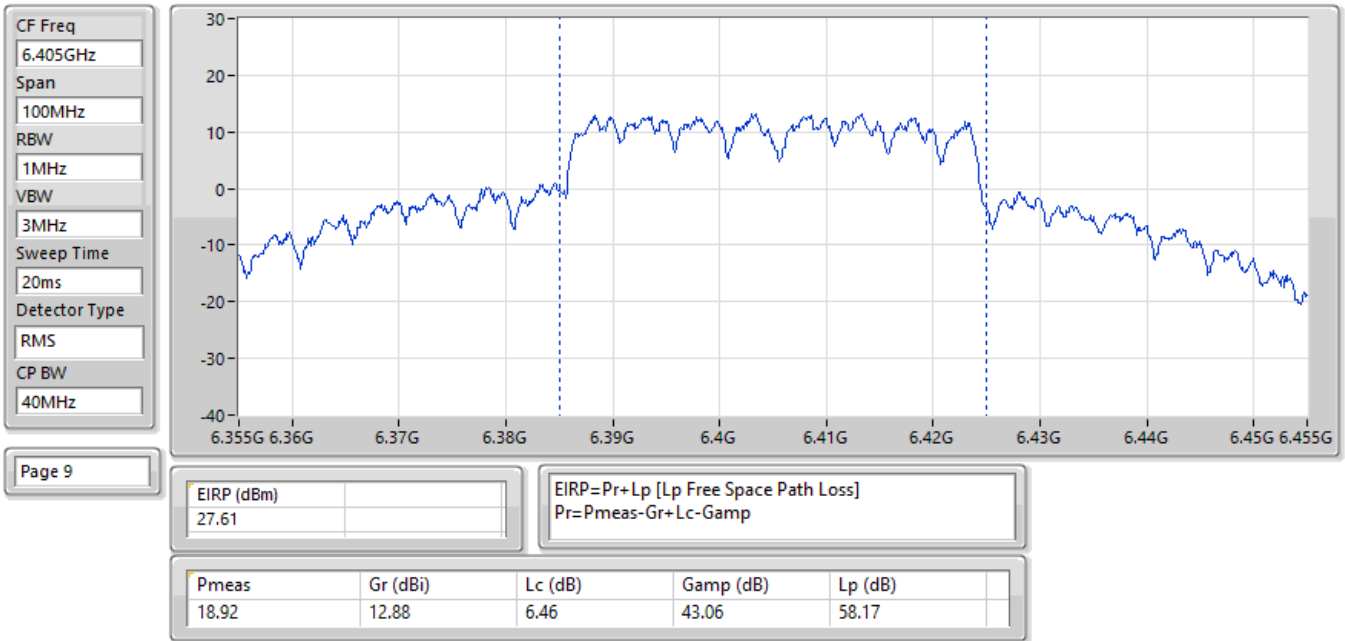

28/12/2024


EIRP:Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6565MHz;TX

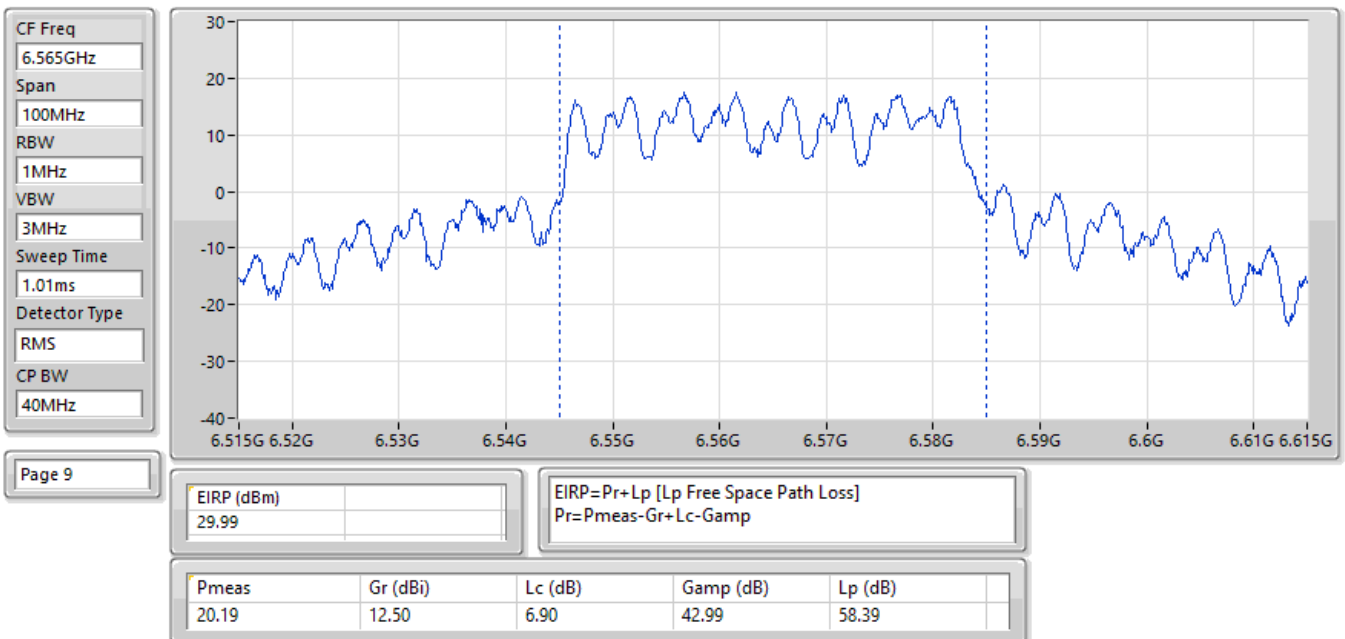

12/03/2025

EIRP:Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6685MHz;TX

CF Freq
6.685GHz
Span
100MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
40MHz

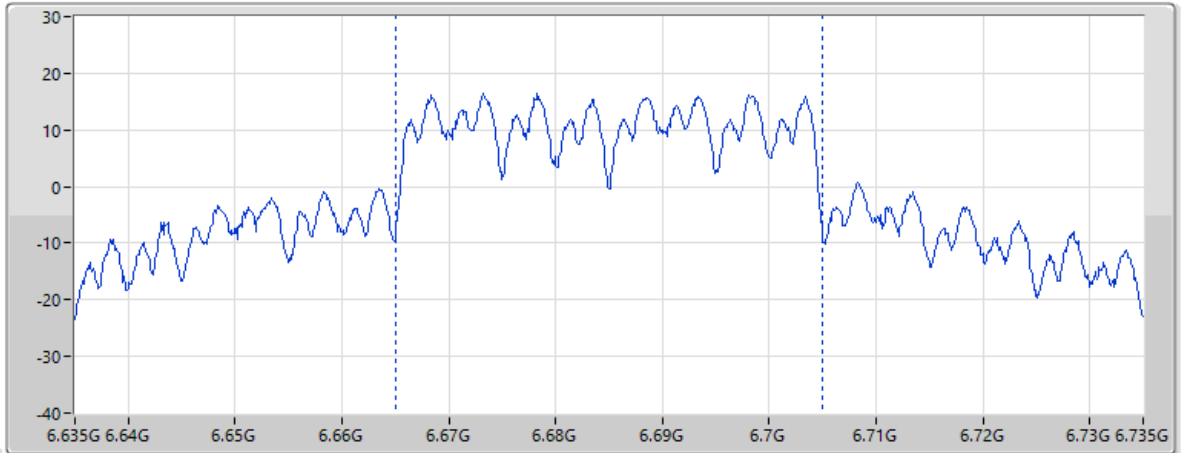


Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
28.98				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
18.92	12.57	7.01	42.92	58.54

12/03/2025

EIRP:Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6845MHz;TX

CF Freq
6.845GHz
Span
100MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
40MHz

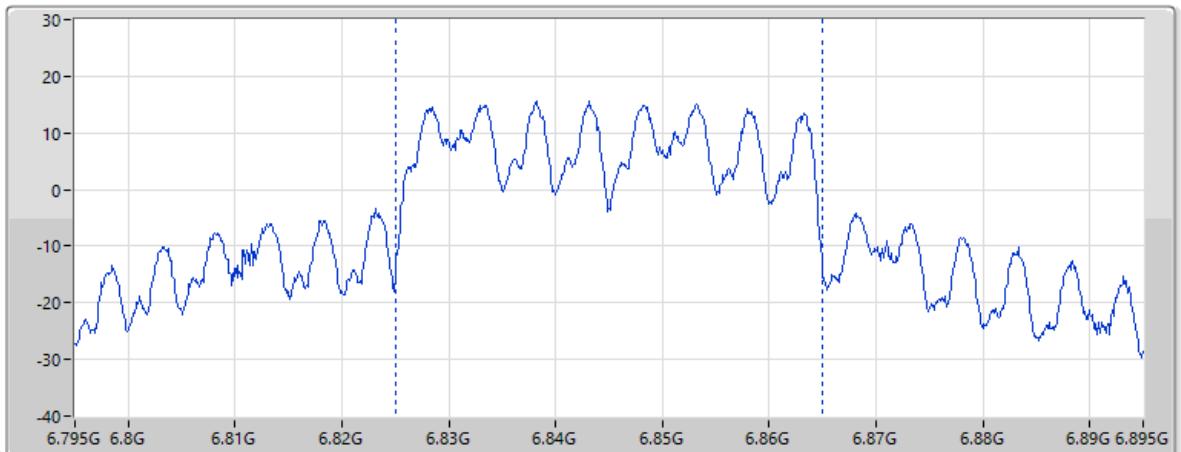


Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
26.98				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
16.69	12.71	7.08	42.83	58.75


26/12/2024

EIRP:Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:5985MHz;TX

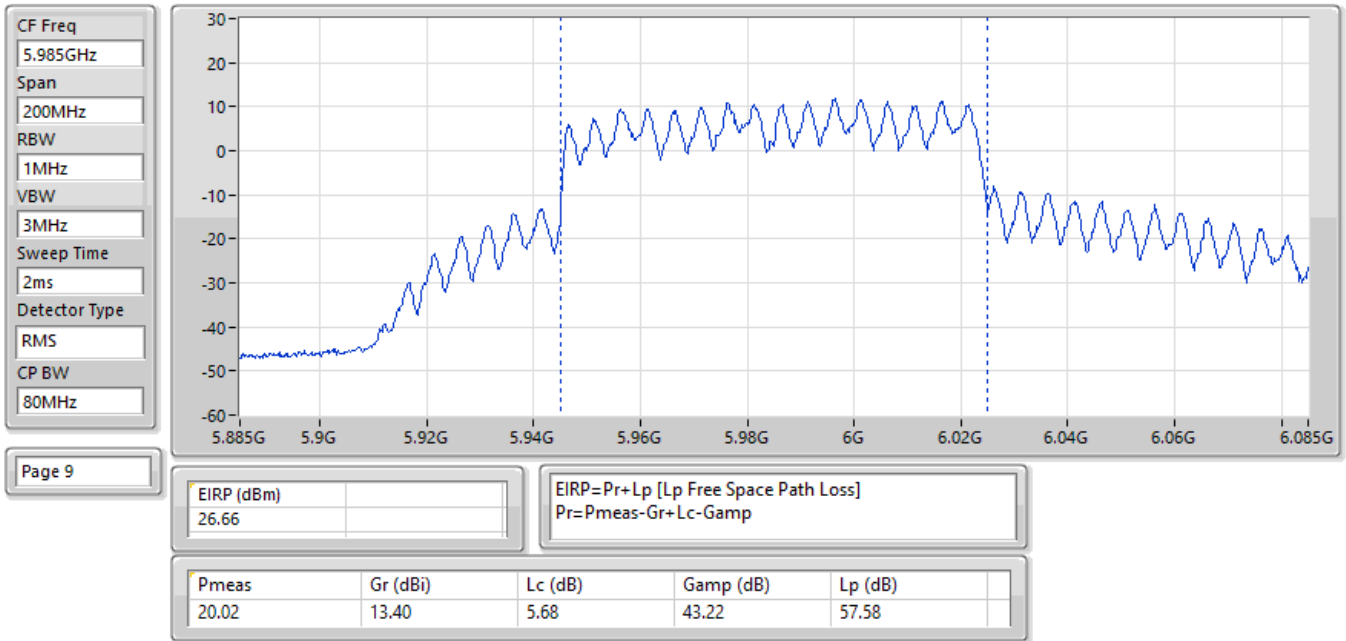

27/12/2024


EIRP:Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6225MHz;TX

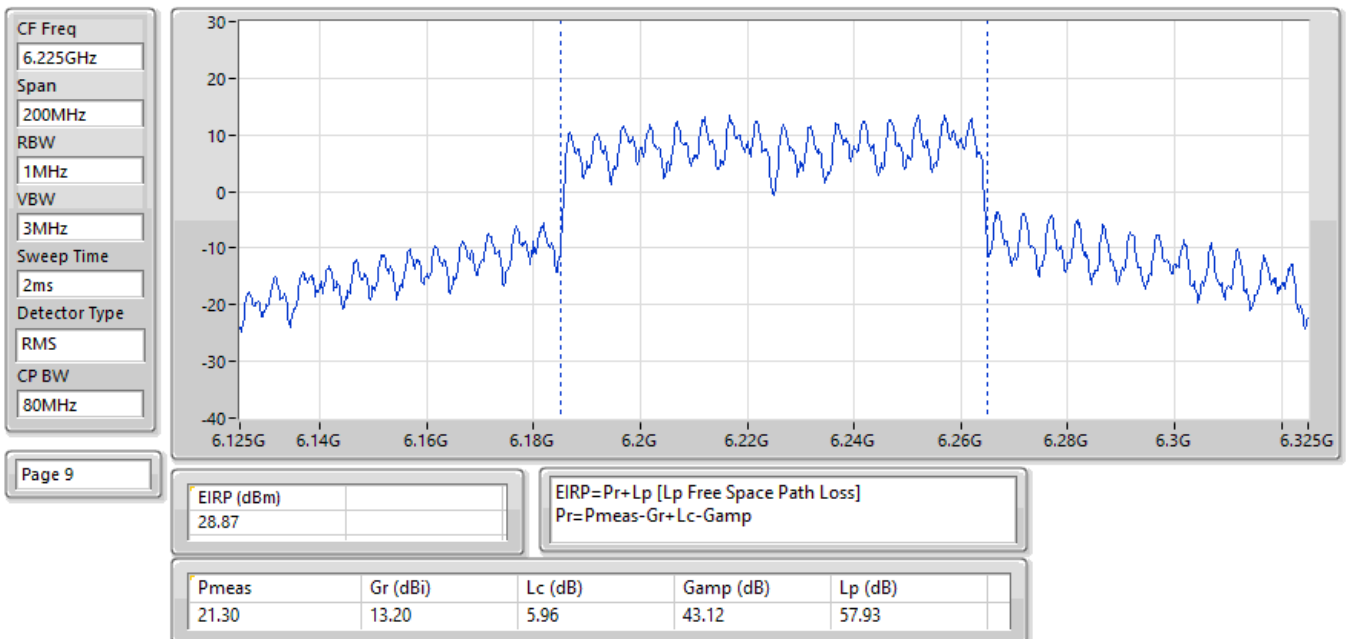

12/03/2025

EIRP:Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6385MHz;TX

CF Freq
6.385GHz
Span
200MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
80MHz

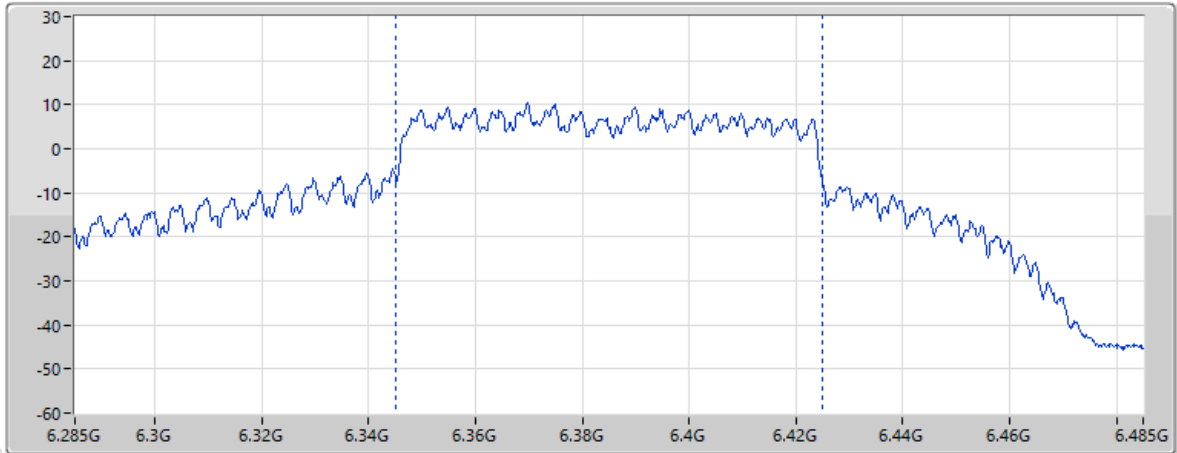


Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
26.43				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
17.90	12.96	6.41	43.07	58.15

27/12/2024

EIRP:Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6625MHz;TX

CF Freq
6.625GHz
Span
200MHz
RBW
1MHz
VBW
3MHz
Sweep Time
2ms
Detector Type
RMS
CP BW
80MHz

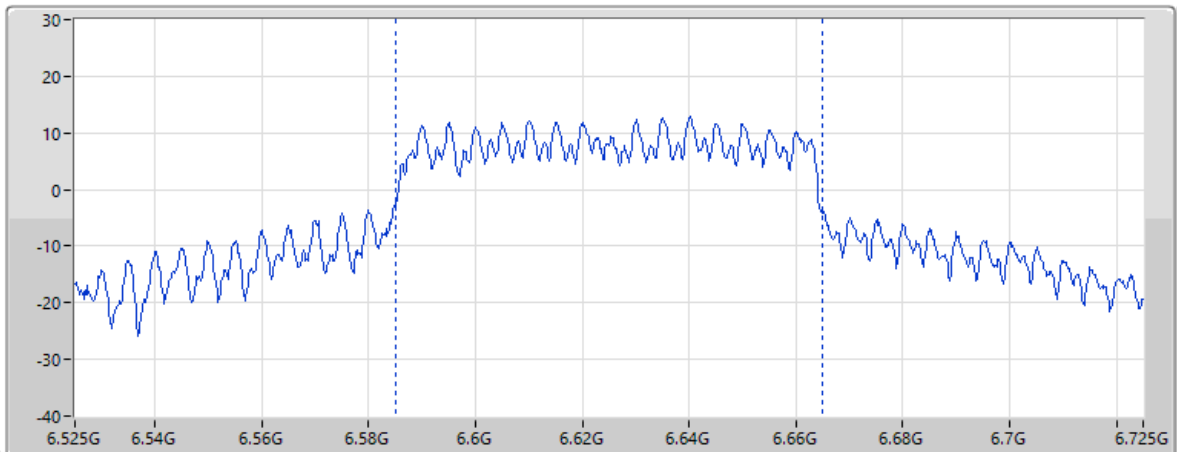


Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
28.52				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
18.51	12.50	7.00	42.96	58.47


12/03/2025

EIRP:Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6705MHz;TX

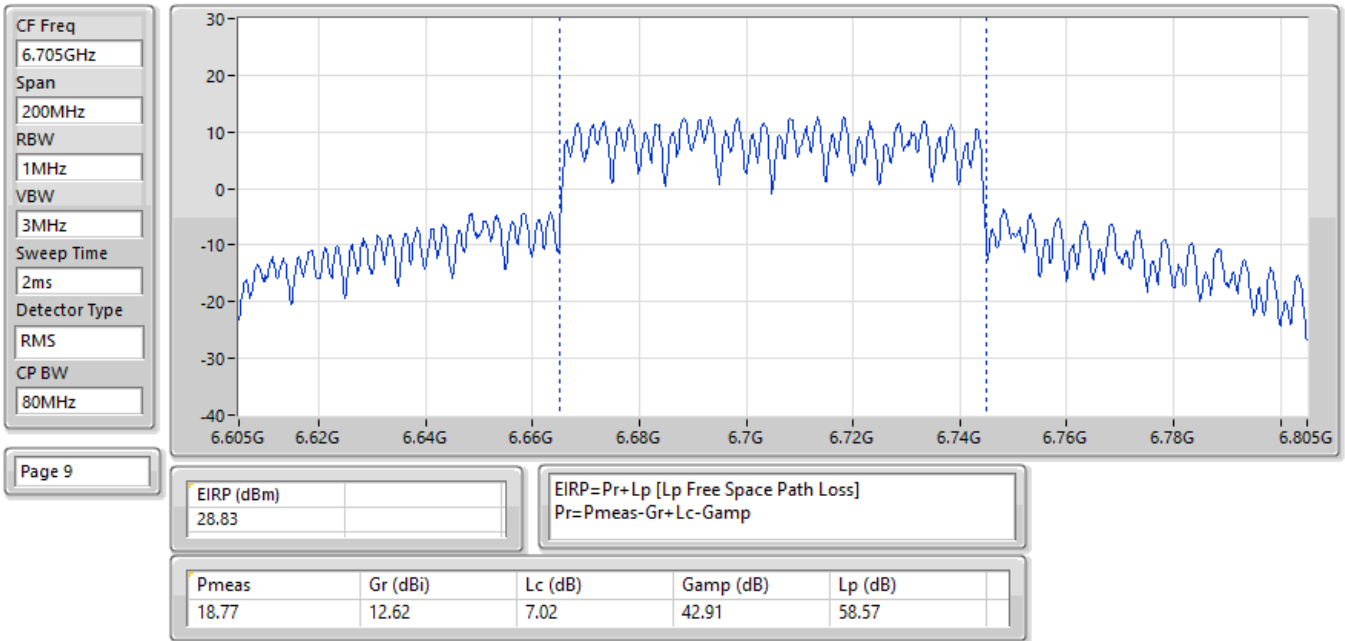


12/03/2025

EIRP:Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6785MHz;TX

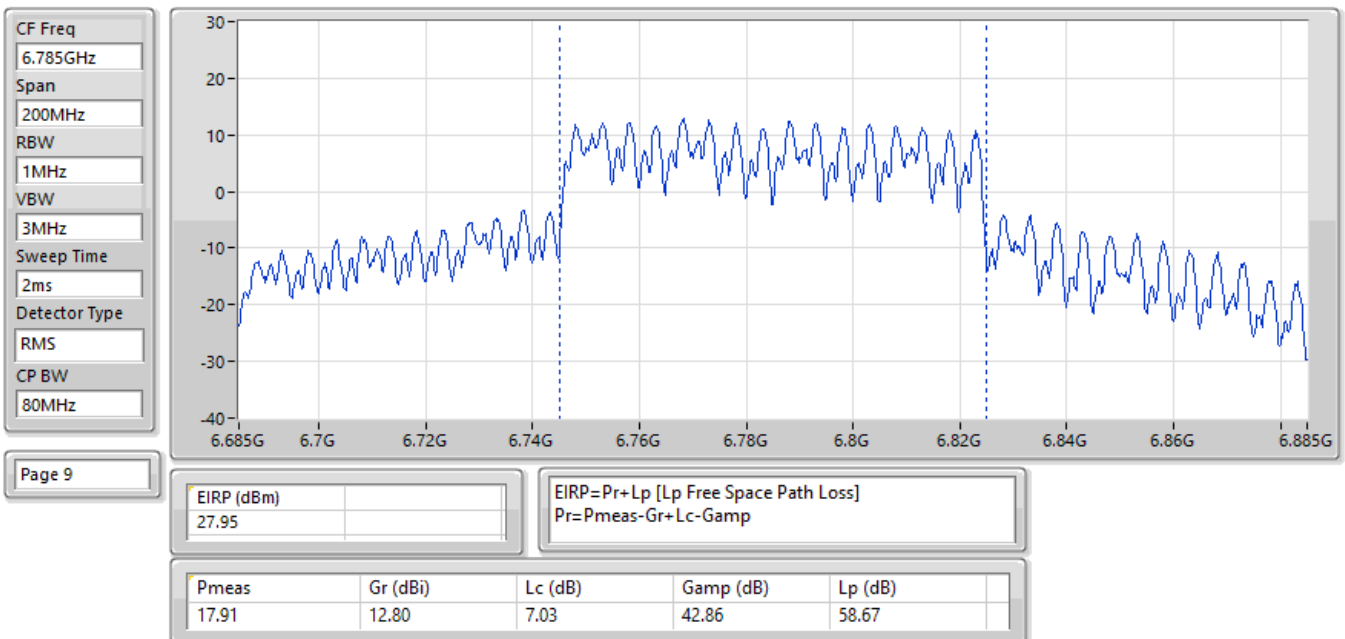


28/12/2024

EIRP;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6025MHz;TX

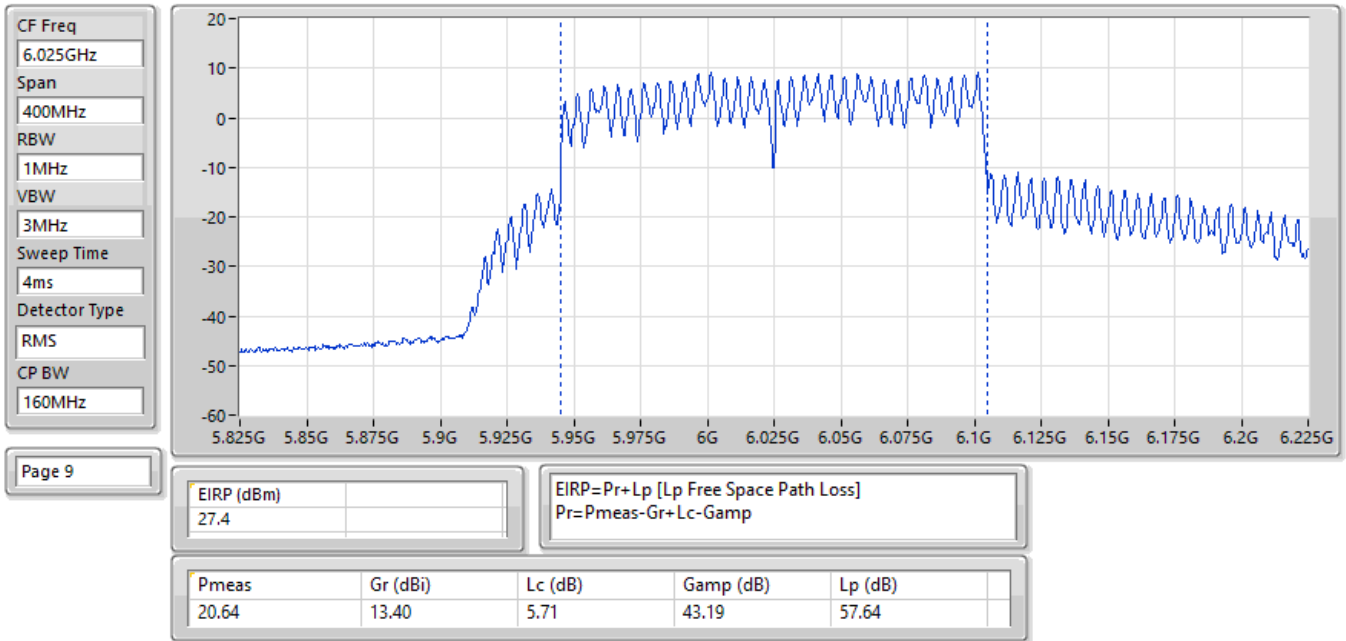


13/03/2025

EIRP;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6185MHz;TX

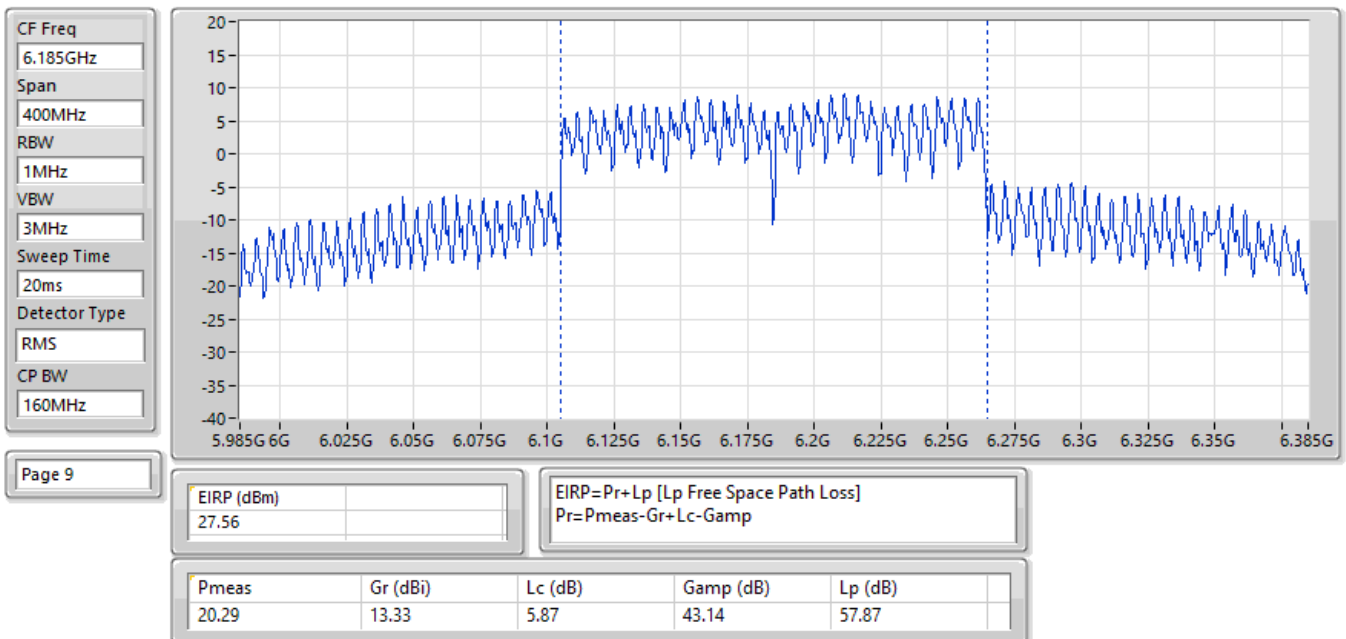


13/03/2025

EIRP;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6345MHz;TX

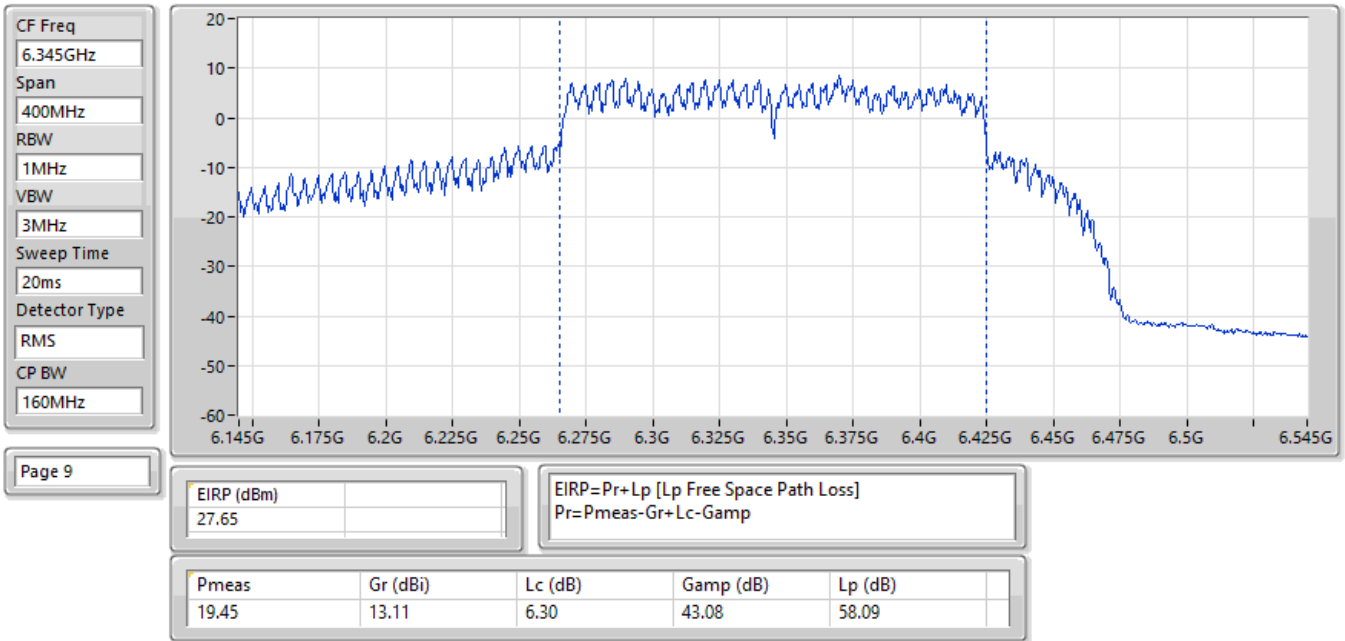

13/03/2025


EIRP;Band:6.7G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6665MHz;TX

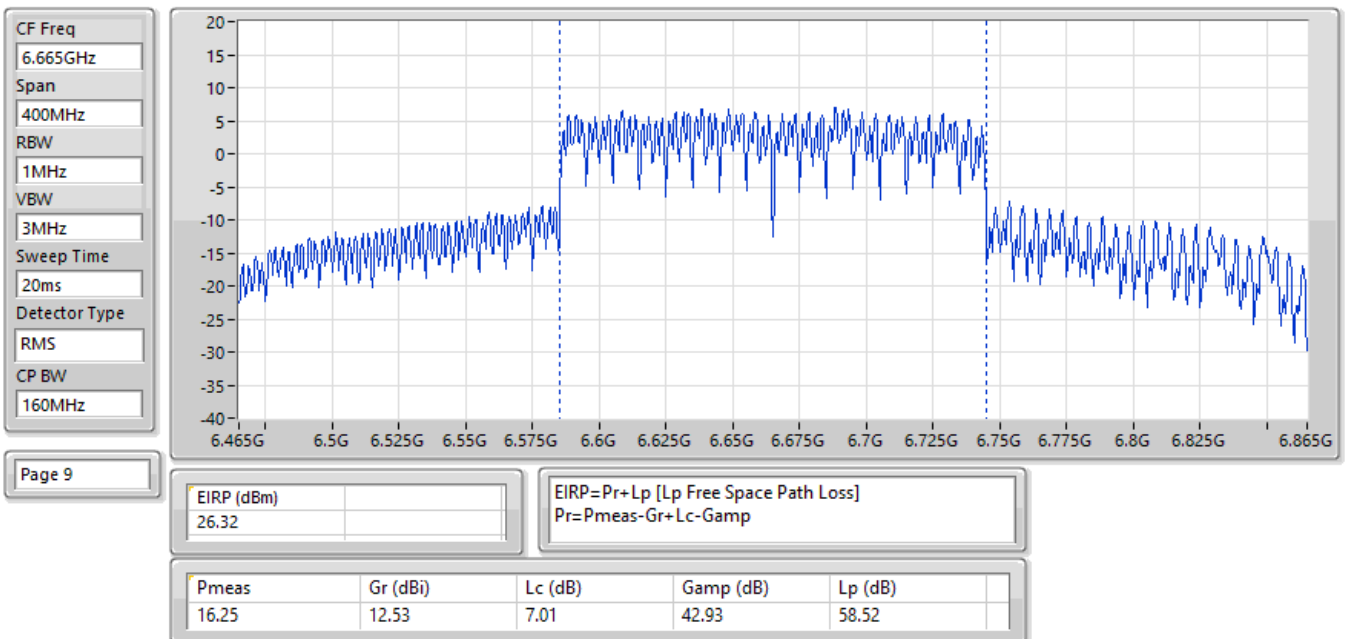

13/03/2025

EIRP;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6105MHz;TX

CF Freq
6.105GHz
Span
800MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
320MHz

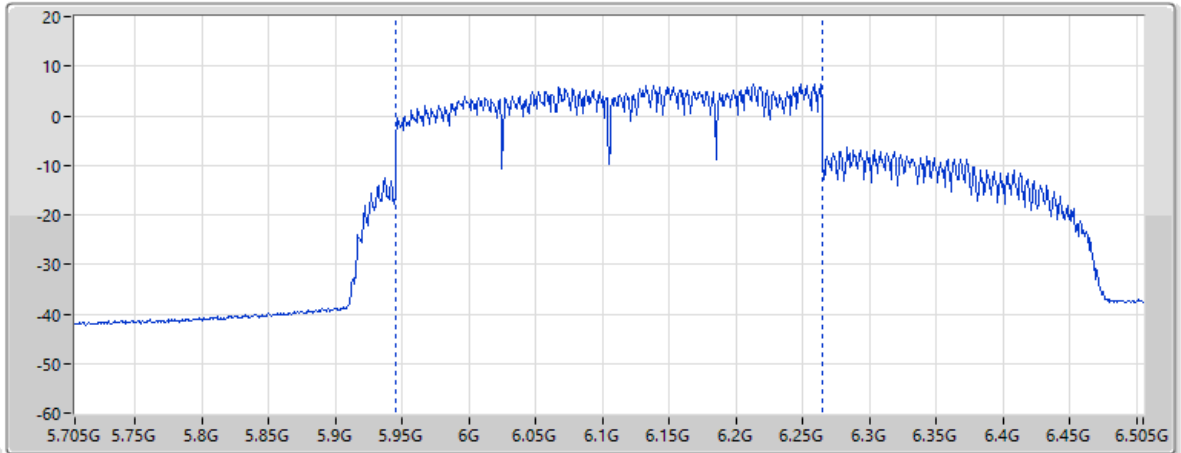


Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
29.36				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
22.46	13.49	5.79	43.16	57.76

13/03/2025

EIRP;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6265MHz;TX

CF Freq
6.265GHz
Span
800MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
320MHz

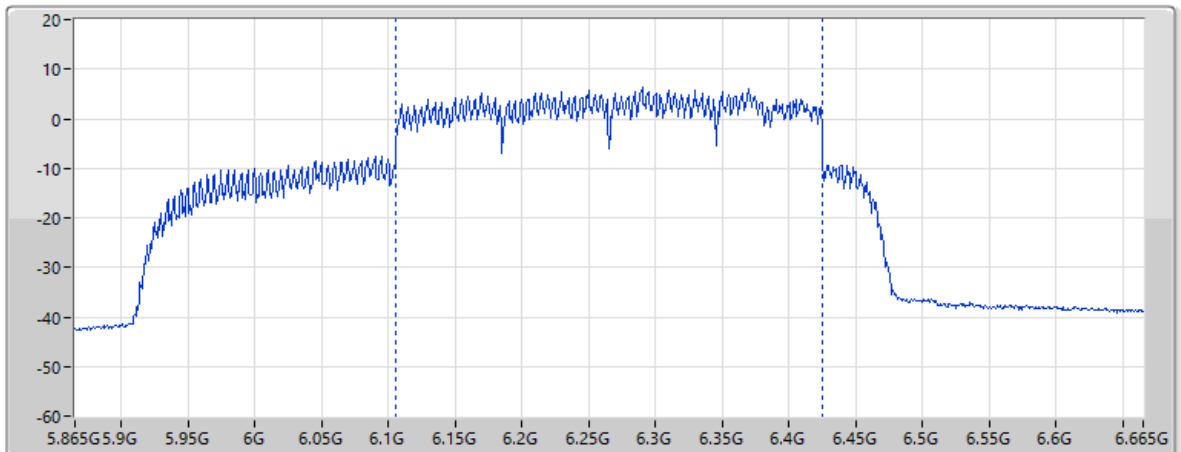


Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
28.65				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
20.84	13.13	6.07	43.11	57.98

13/03/2025

EIRP:Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:5955MHz;TX

CF Freq
5.955GHz
Span
50MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

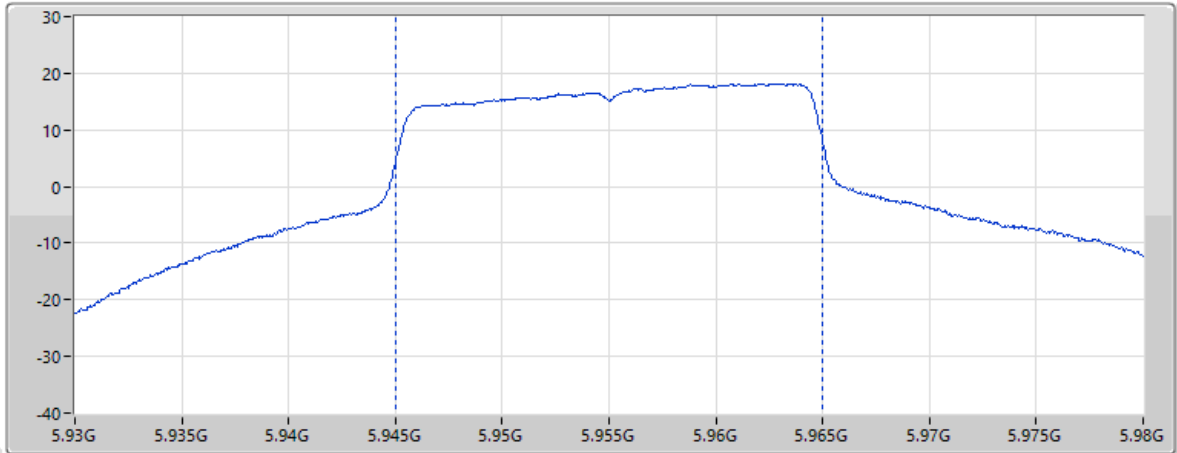


Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
30.59				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
8.61	10.59	7.47	32.44	57.54

13/03/2025

EIRP:Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6195MHz;TX

CF Freq
6.195GHz
Span
50MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

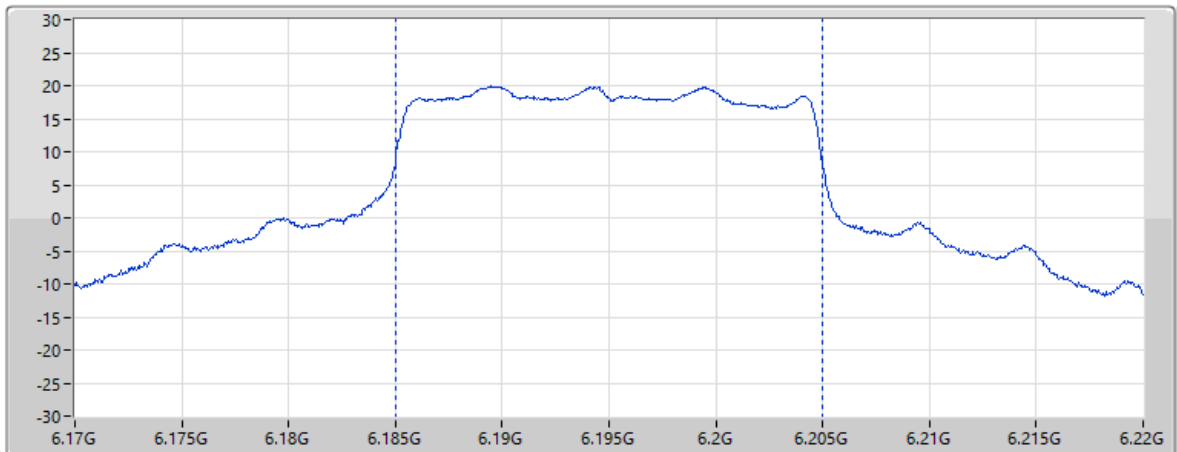

Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
32.33				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
9.98	10.70	7.59	32.42	57.88

13/03/2025

EIRP:Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6415MHz;TX

CF Freq
6.415GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
20MHz

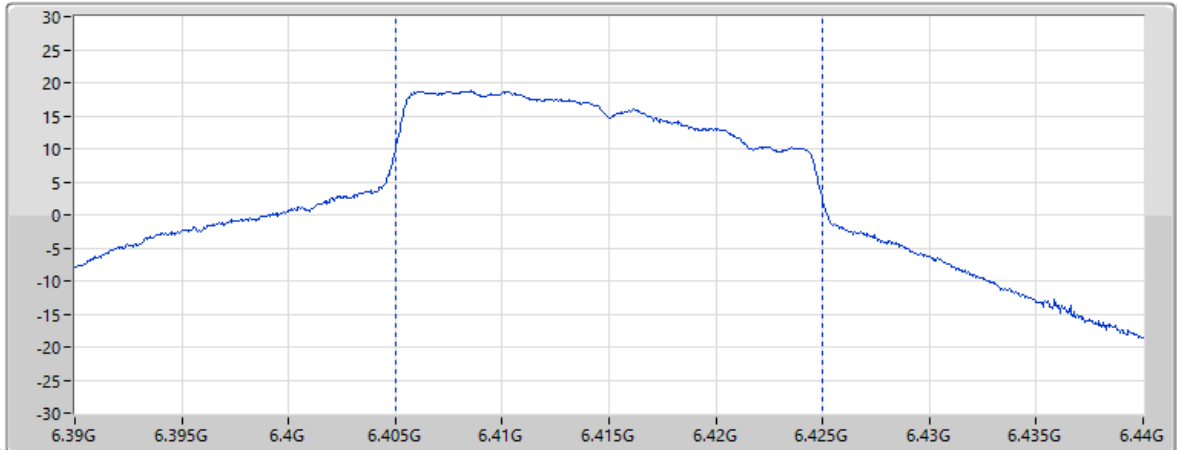

Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
30.12				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
7.22	10.73	7.83	32.39	58.19

14/03/2025

EIRP:Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6535MHz;TX

CF Freq
6.535GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
20MHz

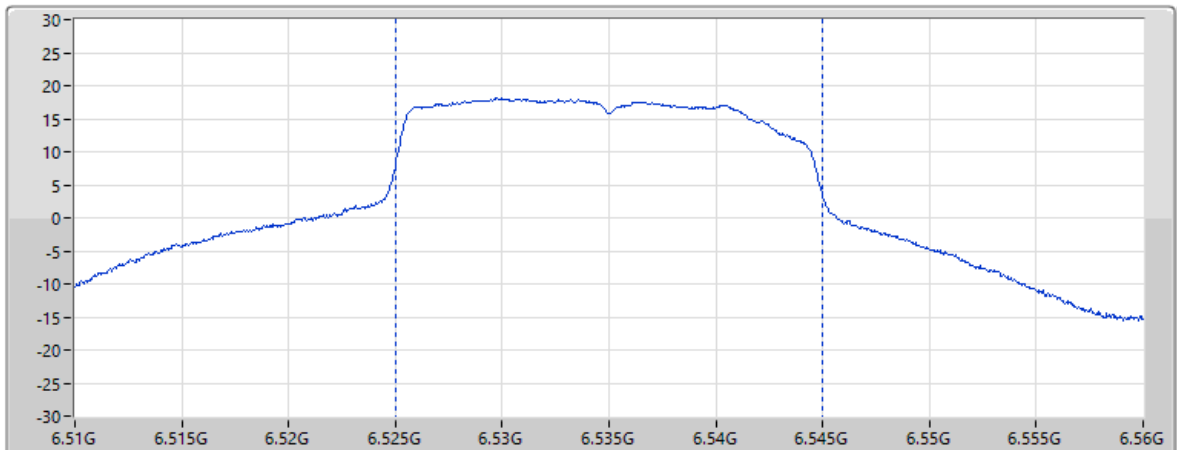


Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
30.77				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
7.65	10.73	7.91	32.41	58.35

14/03/2025

EIRP:Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6695MHz;TX

CF Freq
6.695GHz
Span
50MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

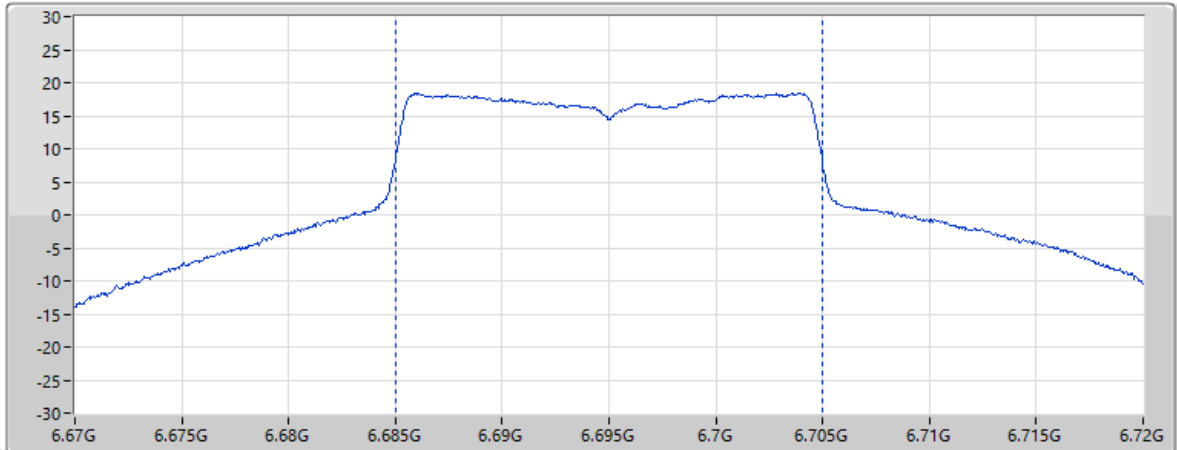


Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
31.32				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
7.92	10.60	7.96	32.52	58.56

14/03/2025

EIRP:Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6855MHz;TX

CF Freq
6.855GHz
Span
50MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

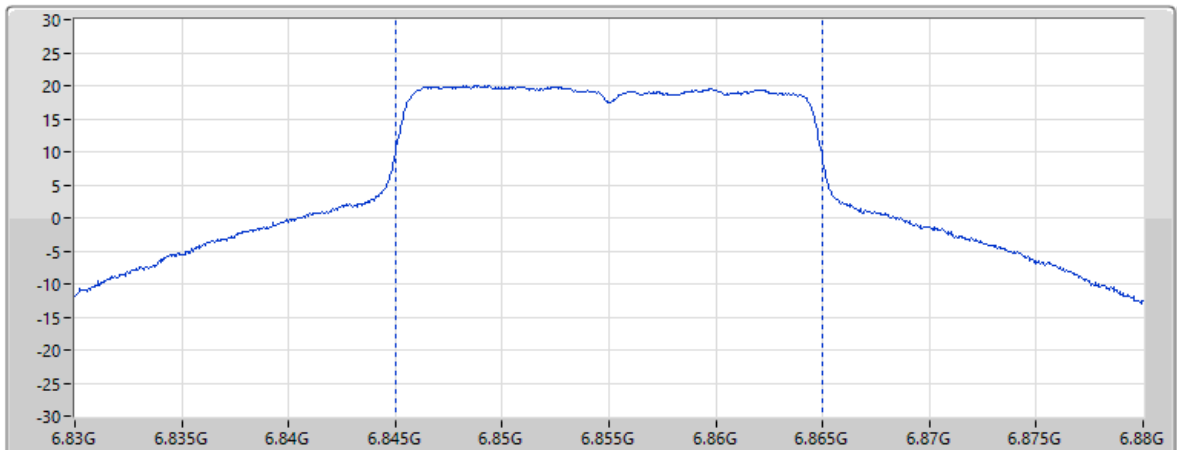

Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
33.22				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
9.63	10.50	7.97	32.64	58.76

14/03/2025

EIRP:Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:5965MHz;TX

CF Freq
5.965GHz

Span
100MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
40MHz

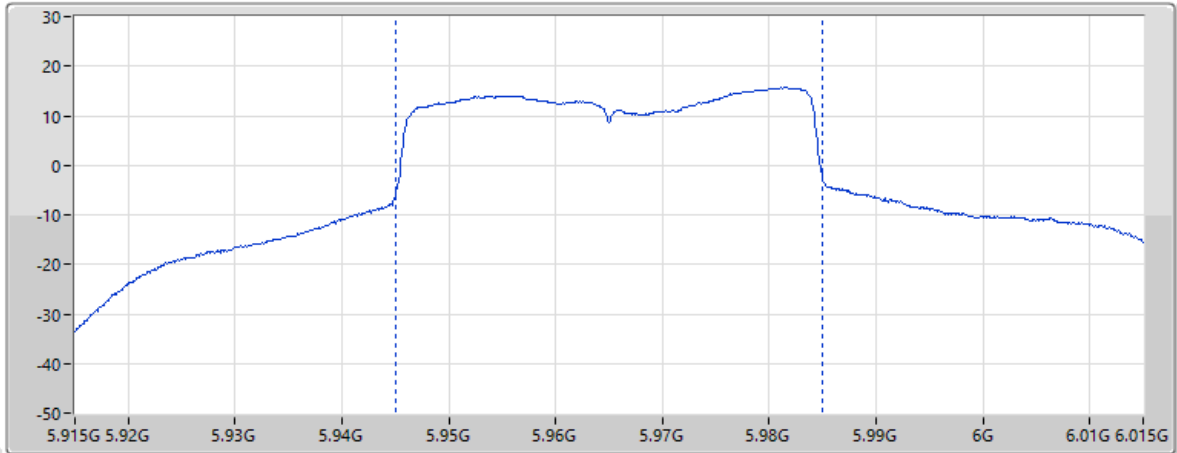

Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
30.13				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
8.12	10.57	7.47	32.44	57.55

14/03/2025

EIRP:Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6205MHz;TX

CF Freq
6.205GHz

Span
100MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
40MHz

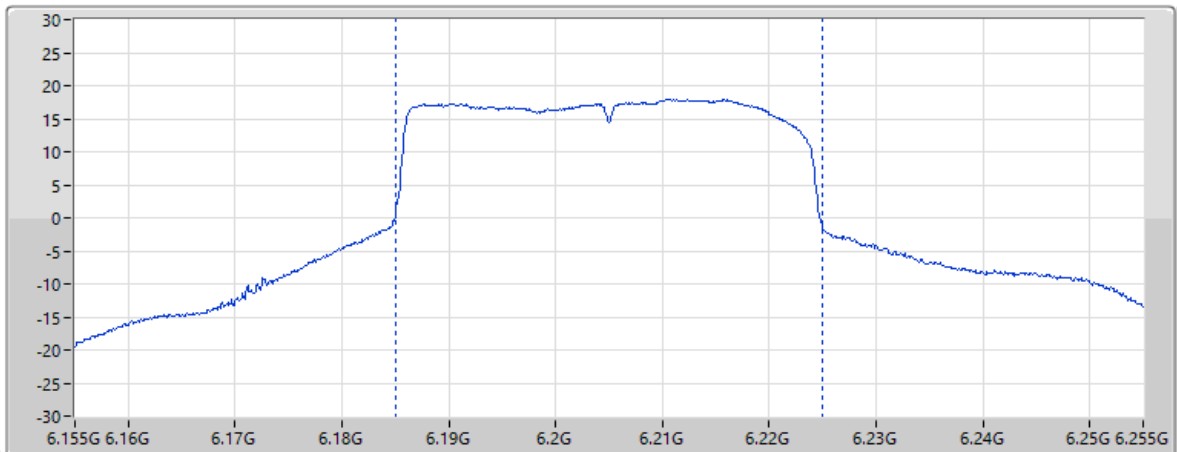


Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
33.76				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
11.40	10.72	7.60	32.42	57.90

14/03/2025

EIRP:Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6405MHz;TX

CF Freq
6.405GHz
Span
100MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
40MHz

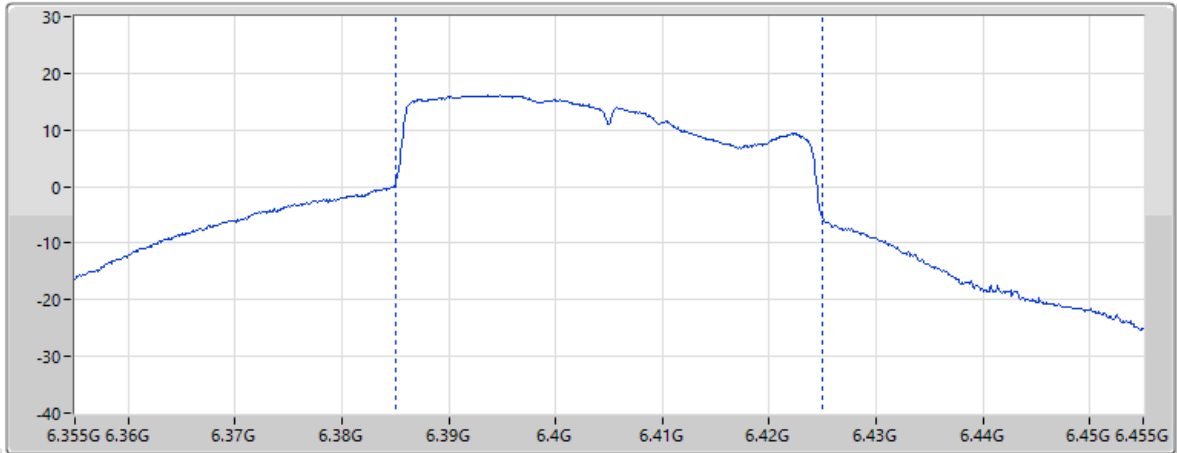


Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
30.43				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
7.54	10.71	7.82	32.39	58.17

14/03/2025

EIRP:Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6565MHz;TX

CF Freq
6.565GHz
Span
100MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
40MHz

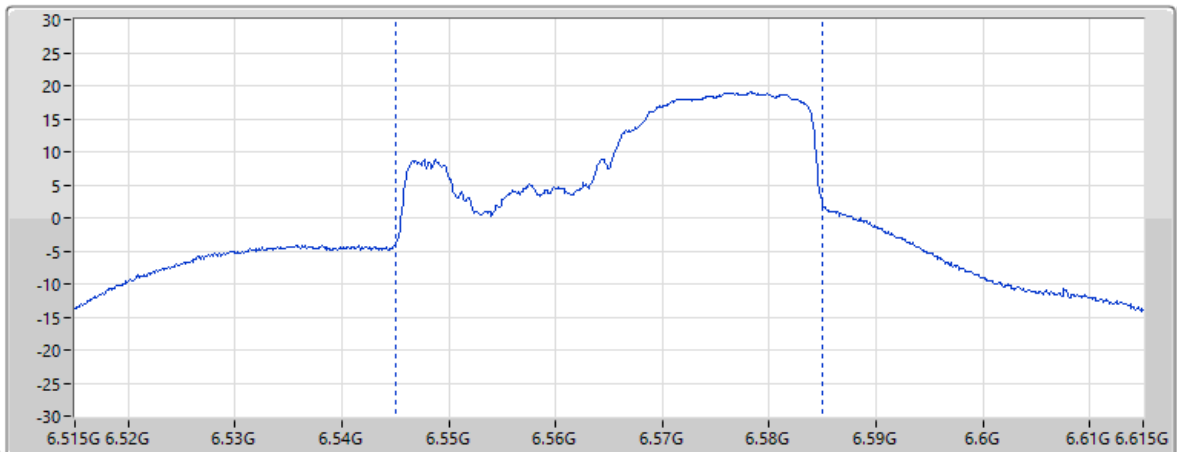


Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
31.74				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
8.52	10.67	7.93	32.43	58.39


14/03/2025

EIRP:Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6685MHz;TX

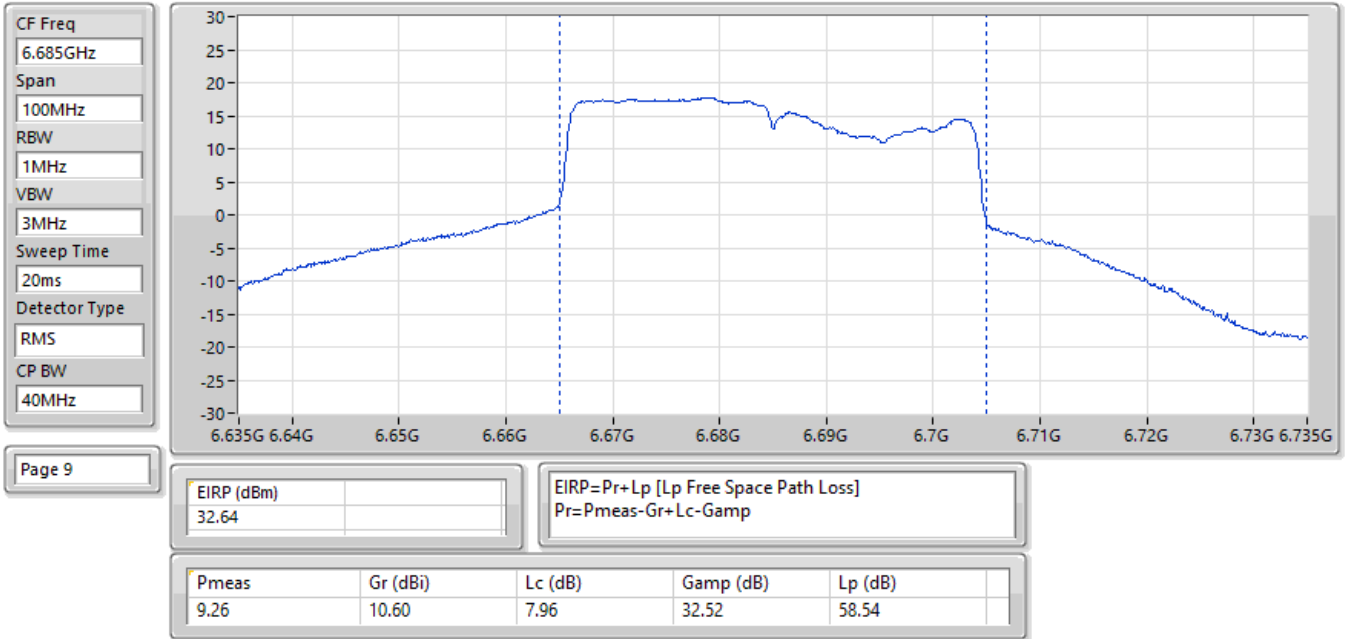

14/03/2025


EIRP:Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6845MHz;TX

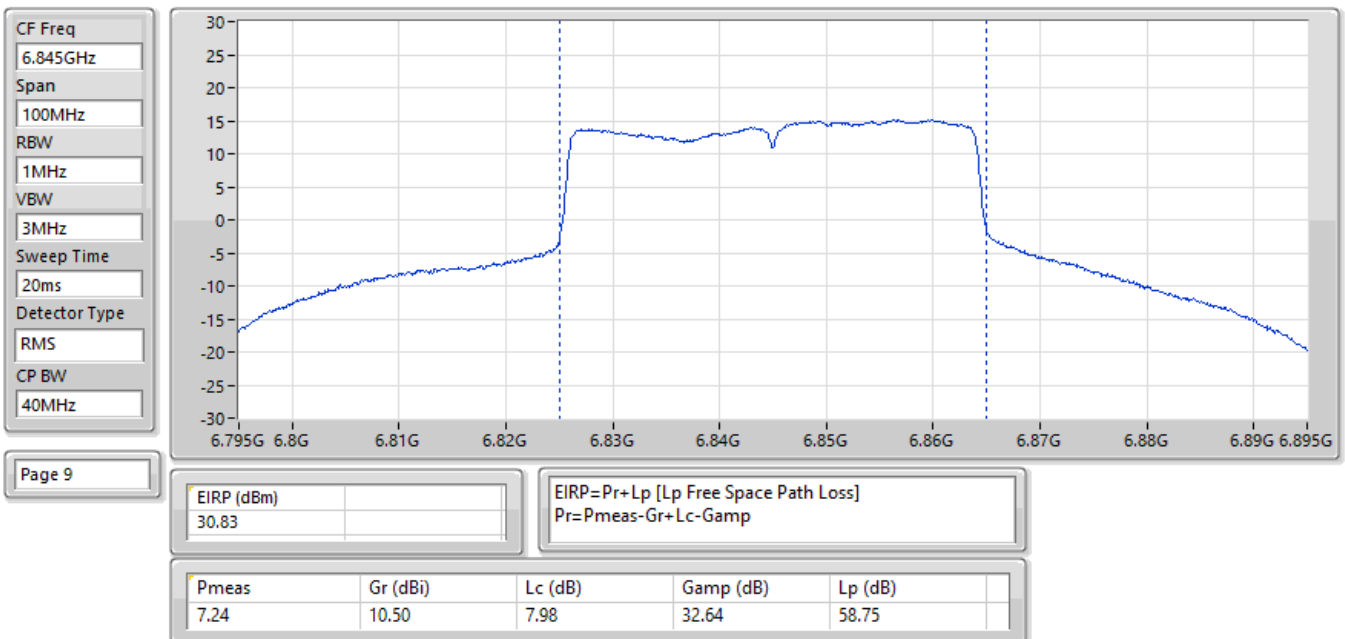

14/03/2025

EIRP:Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:5985MHz;TX

CF Freq
5.985GHz
Span
200MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
80MHz

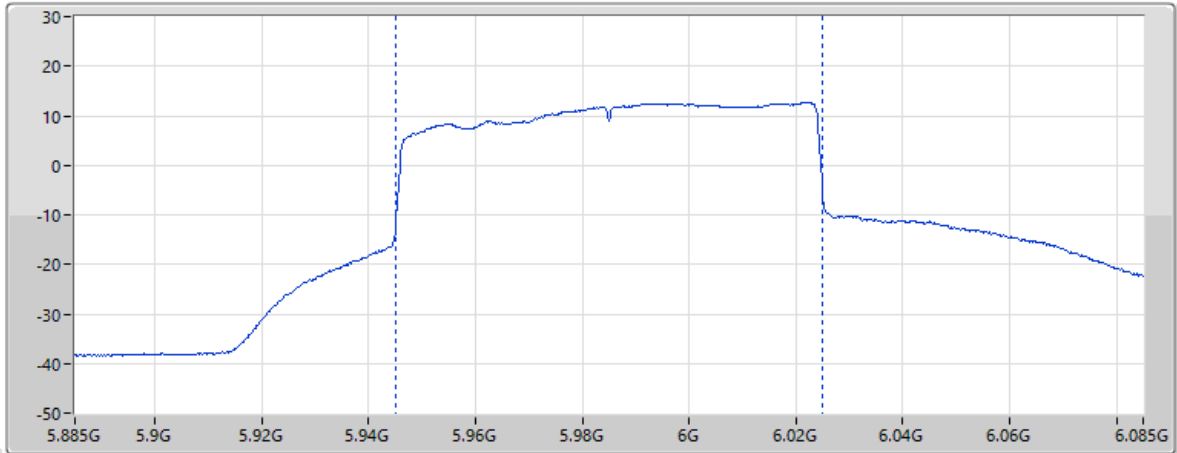


Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
30.97				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
8.87	10.53	7.49	32.44	57.58

14/03/2025

EIRP:Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6225MHz;TX

CF Freq
6.225GHz
Span
200MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
80MHz

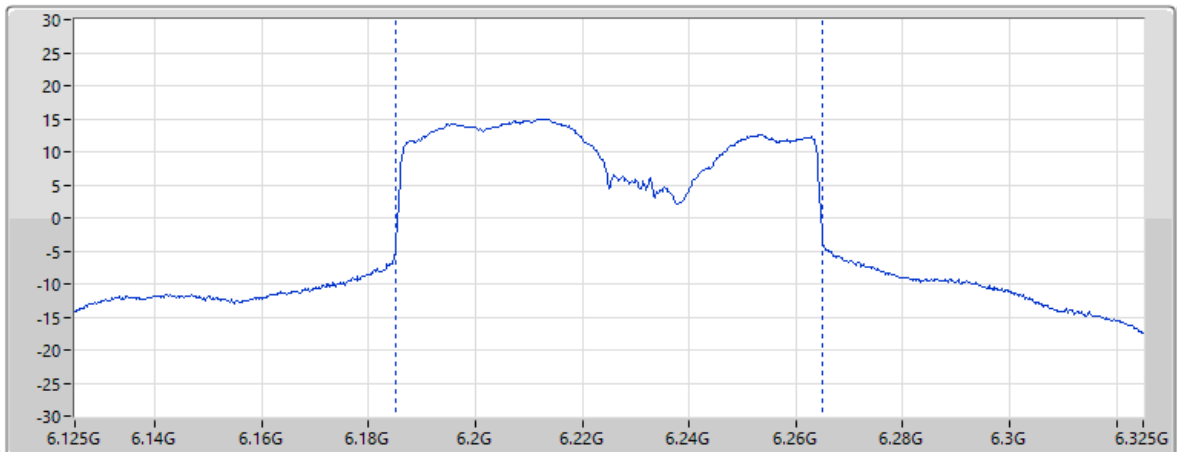


Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
31.97				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
9.63	10.80	7.62	32.41	57.93

14/03/2025

EIRP:Band:6.2G;be80,8F;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6385MHz;TX

CF Freq
6.385GHz
Span
200MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
80MHz

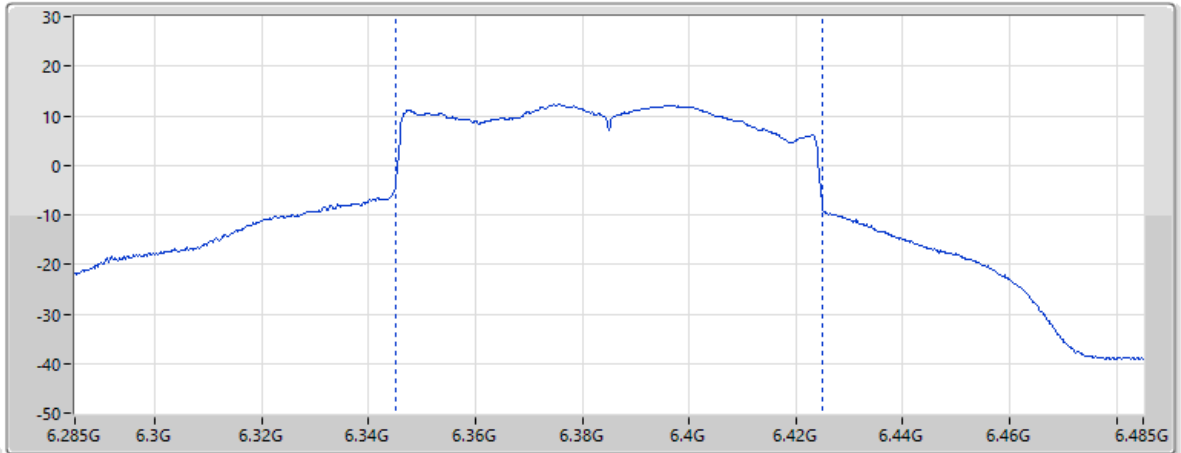


Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
30.18				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
7.38	10.76	7.80	32.39	58.15

14/03/2025

EIRP:Band:6.7G;be80,8F;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6625MHz;TX

CF Freq
6.625GHz
Span
200MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
80MHz

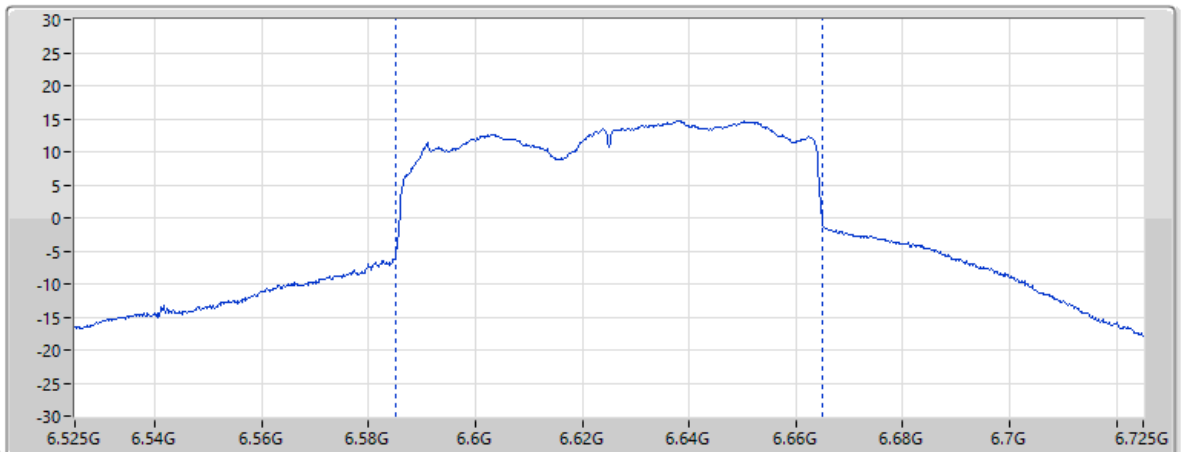


Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
32.56				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
9.21	10.60	7.95	32.47	58.47

14/03/2025

EIRP:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6705MHz;TX

CF Freq
6.705GHz
Span
200MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
80MHz

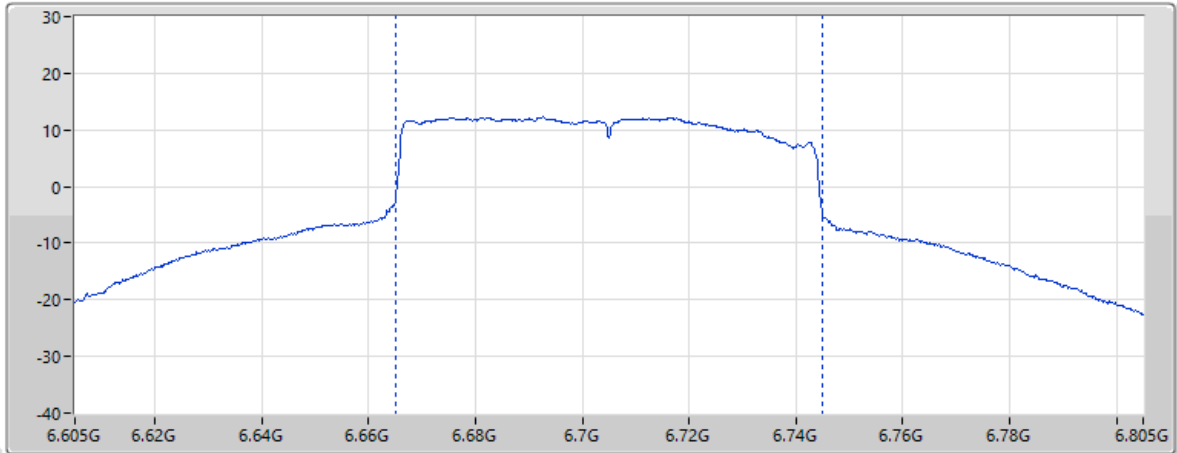


Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
31.21				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
7.79	10.59	7.97	32.53	58.57

14/03/2025

EIRP:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6785MHz;TX

CF Freq
6.785GHz
Span
200MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
80MHz

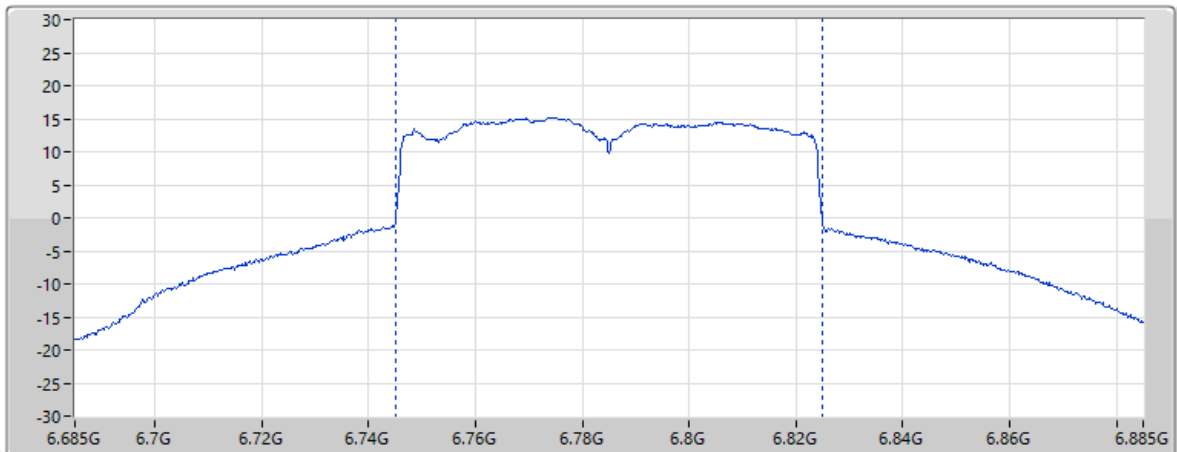

Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
33.82				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
10.26	10.50	7.98	32.59	58.67

13/03/2025

EIRP;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6025MHz;TX

CF Freq
6.025GHz

Span
400MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
160MHz

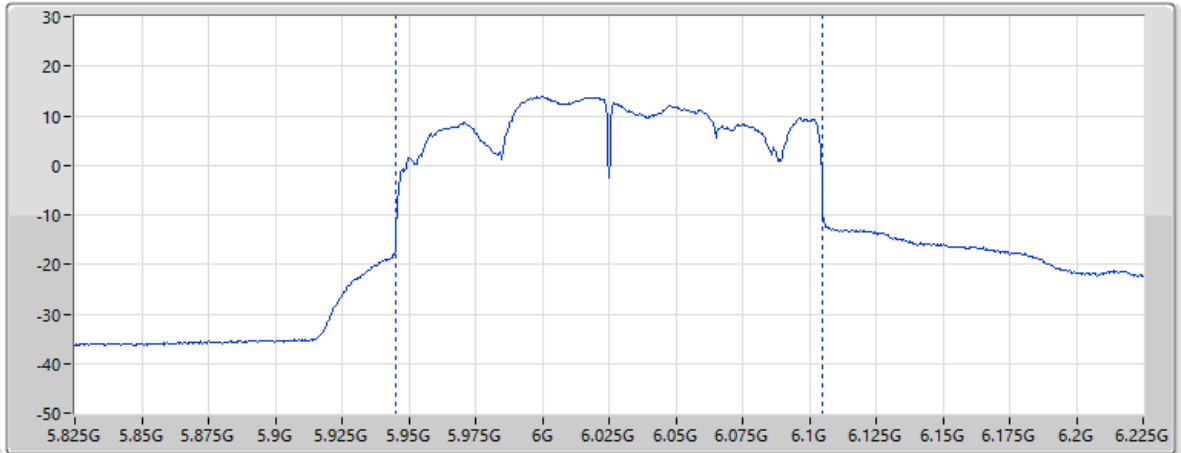

Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
33.1				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
10.89	10.50	7.51	32.44	57.64

14/03/2025

EIRP;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6185MHz;TX

CF Freq
6.185GHz

Span
400MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
160MHz

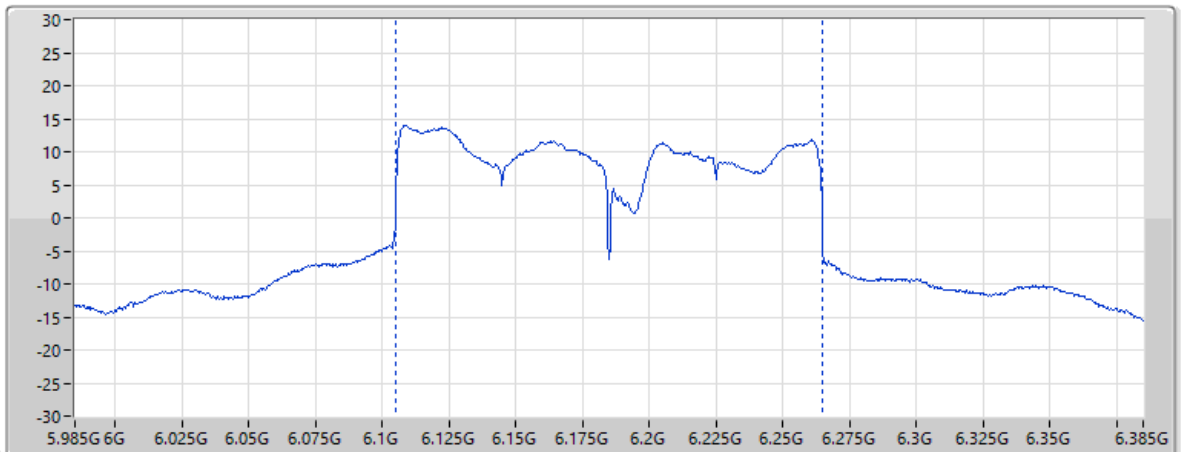


Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
33.25				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
10.92	10.70	7.58	32.42	57.87

14/03/2025

EIRP;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6345MHz;TX

CF Freq
6.345GHz
Span
400MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
160MHz

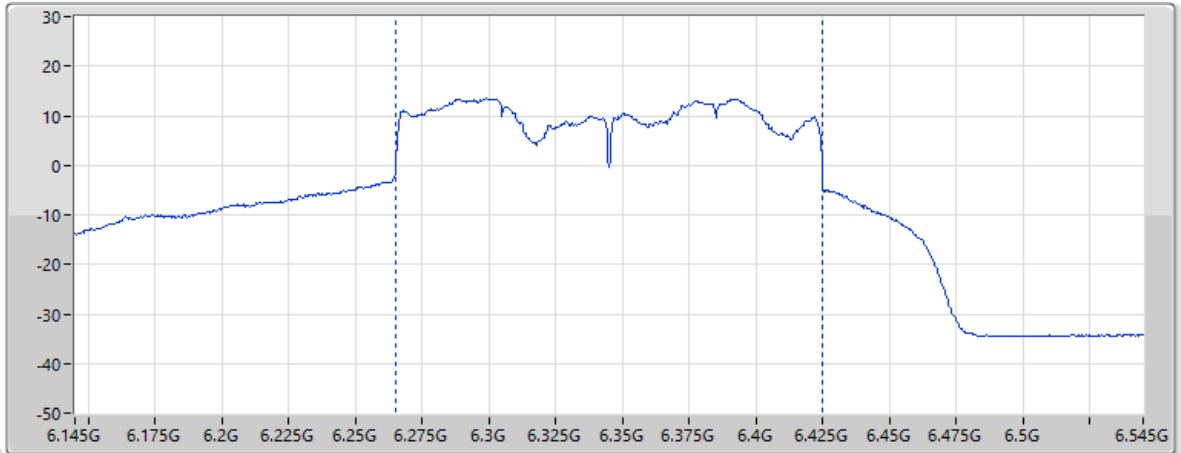

Page 9

EIRP (dBm)
33.67


EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
11.12	10.90	7.76	32.40	58.09

14/03/2025

EIRP;Band:6.7G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6665MHz;TX

CF Freq
6.665GHz
Span
400MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
160MHz

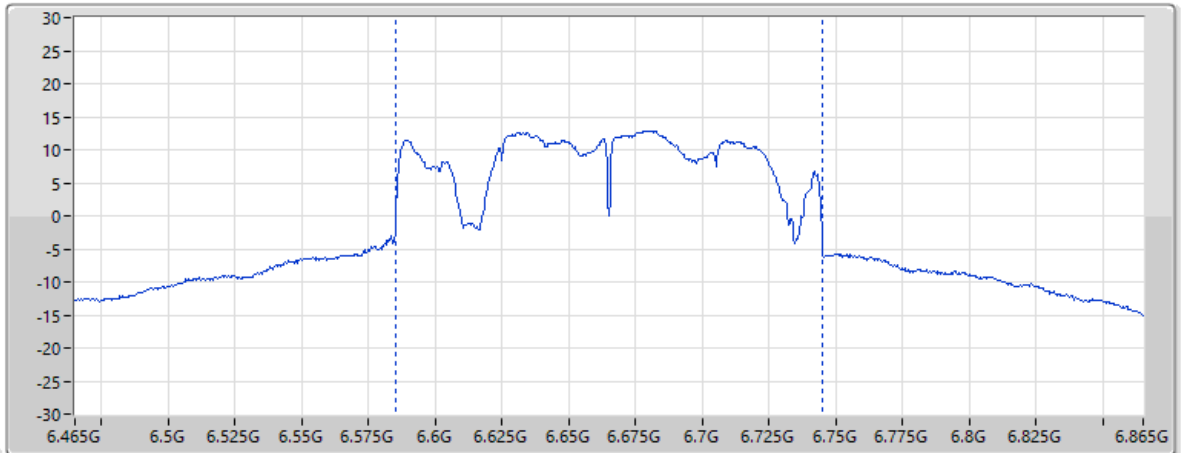

Page 9

EIRP (dBm)
32.98


EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
9.60	10.60	7.96	32.50	58.52

14/03/2025

EIRP;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6105MHz;TX

CF Freq
6.105GHz
Span
800MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
320MHz

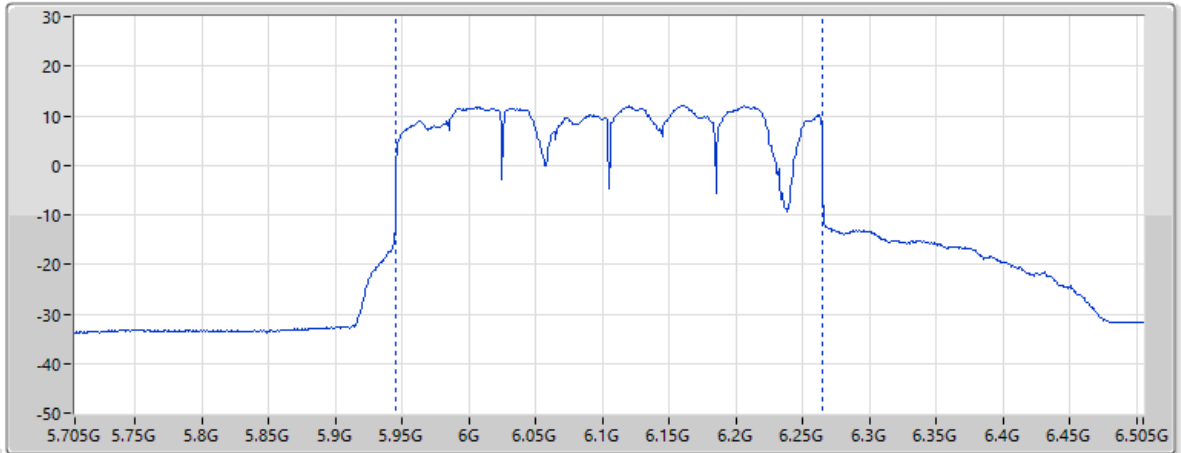


Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
35.75				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
13.39	10.52	7.55	32.43	57.76

14/03/2025

EIRP;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6265MHz;TX

CF Freq
6.265GHz
Span
800MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
320MHz

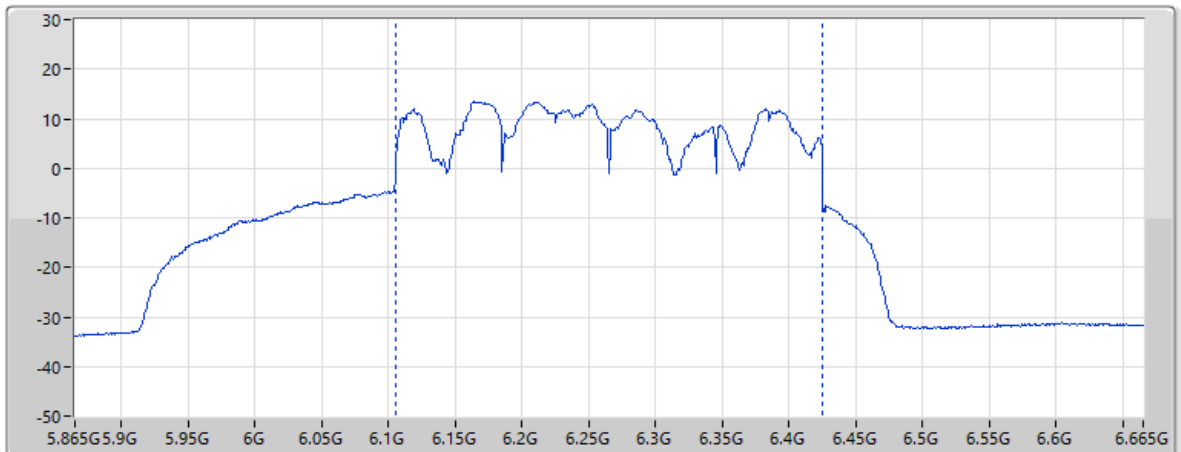

Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
35.69				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
13.36	10.90	7.66	32.41	57.98

Test Mode: Mode 4

Summary


Mode	Total Power	Total Power	EIRP	EIRP
	(dBm)	(W)	(dBm)	(W)
6.525-6.875GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	15.82	0.03819	15.82	0.03819
802.11be EHT20_Nss1,(MCS0)_4TX	15.36	0.03436	15.36	0.03436
802.11be EHT20_Nss1,(MCS0)_4TX	15.53	0.03573	15.53	0.03573
802.11be EHT40_Nss1,(MCS0)_4TX	17.87	0.06124	17.87	0.06124
802.11be EHT40_Nss1,(MCS0)_4TX	18.25	0.06683	18.25	0.06683
802.11be EHT40_Nss1,(MCS0)_4TX	19.14	0.08204	19.14	0.08204
802.11be EHT80_Nss1,(MCS0)_4TX	20.79	0.11995	20.79	0.11995
802.11be EHT80_Nss1,(MCS0)_4TX	21.85	0.15311	21.85	0.15311
802.11be EHT80_Nss1,(MCS0)_4TX	21.20	0.13183	21.20	0.13183
802.11be EHT80_Nss1,(MCS0)_4TX	21.52	0.14191	21.52	0.14191
802.11be EHT160_Nss1,(MCS0)_4TX	23.83	0.24155	23.83	0.24155
802.11be EHT160_Nss1,(MCS0)_4TX	24.73	0.29717	24.73	0.29717
802.11be EHT320_Nss1,(MCS0)_4TX	27.36	0.54450	27.36	0.54450
802.11be EHT320_Nss1,(MCS0)_4TX	25.69	0.37068	25.69	0.37068
6.875-7.125GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	15.73	0.03741	15.73	0.03741
802.11be EHT20_Nss1,(MCS0)_4TX	15.04	0.03192	15.04	0.03192
802.11be EHT20_Nss1,(MCS0)_4TX	14.58	0.02871	14.58	0.02871
802.11be EHT20_Nss1,(MCS0)_4TX	15.08	0.03221	15.08	0.03221
802.11be EHT40_Nss1,(MCS0)_4TX	18.00	0.06310	18.00	0.06310
802.11be EHT40_Nss1,(MCS0)_4TX	17.71	0.05902	17.71	0.05902
802.11be EHT40_Nss1,(MCS0)_4TX	17.51	0.05636	17.51	0.05636
802.11be EHT80_Nss1,(MCS0)_4TX	21.28	0.13428	21.28	0.13428
802.11be EHT80_Nss1,(MCS0)_4TX	20.65	0.11614	20.65	0.11614
802.11be EHT160_Nss1,(MCS0)_4TX	23.82	0.24099	23.82	0.24099

Result


Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-
6535MHz	Pass	15.82	30.00
6695MHz	Pass	15.36	30.00
6875MHz	Pass	15.53	30.00
6895MHz	Pass	15.73	30.00
6995MHz	Pass	15.04	30.00
7095MHz	Pass	14.58	30.00
7115MHz	Pass	15.08	30.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-
6565MHz	Pass	17.87	30.00
6685MHz	Pass	18.25	30.00
6885MHz	Pass	19.14	30.00
6925MHz	Pass	18.00	30.00
7005MHz	Pass	17.71	30.00
7085MHz	Pass	17.51	30.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-
6625MHz	Pass	20.79	30.00
6705MHz	Pass	21.85	30.00
6785MHz	Pass	21.20	30.00
6865MHz	Pass	21.52	30.00
6945MHz	Pass	21.28	30.00
7025MHz	Pass	20.65	30.00
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-
6665MHz	Pass	23.83	30.00
6825MHz	Pass	24.73	30.00
6985MHz	Pass	23.82	30.00
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-
6745MHz	Pass	27.36	30.00
6905MHz	Pass	25.69	30.00

DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.


EIRP;Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6535MHz;TX

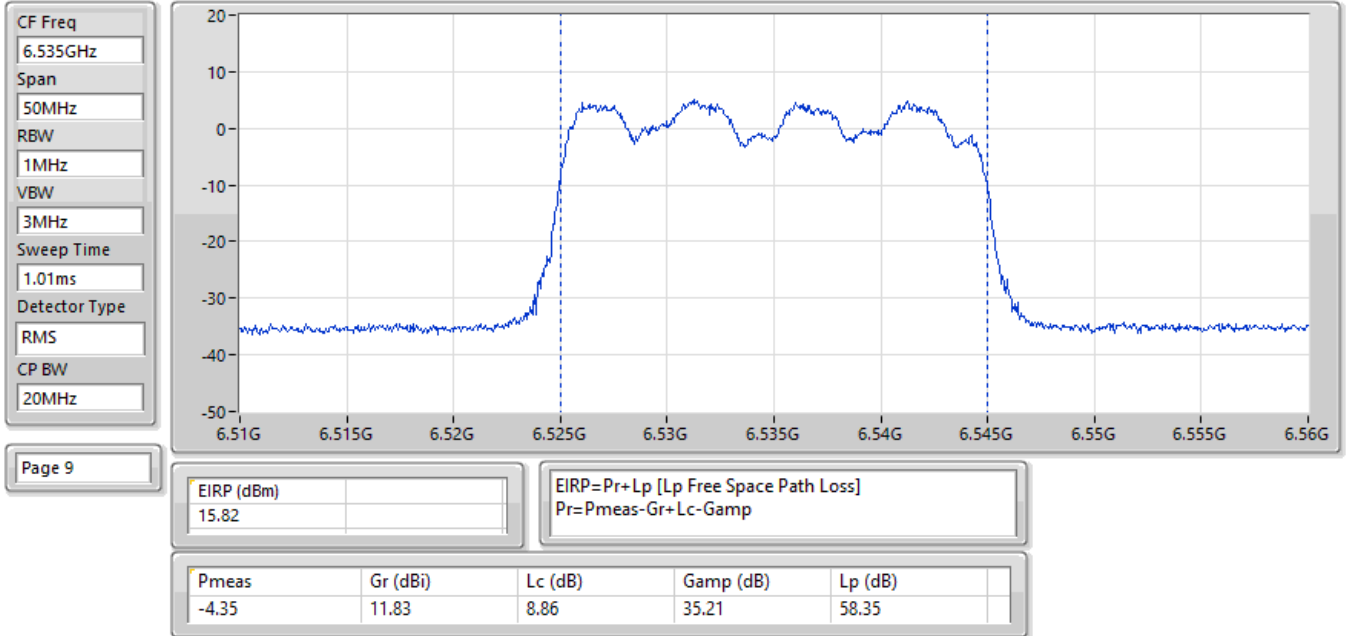


EIRP;Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6695MHz;TX

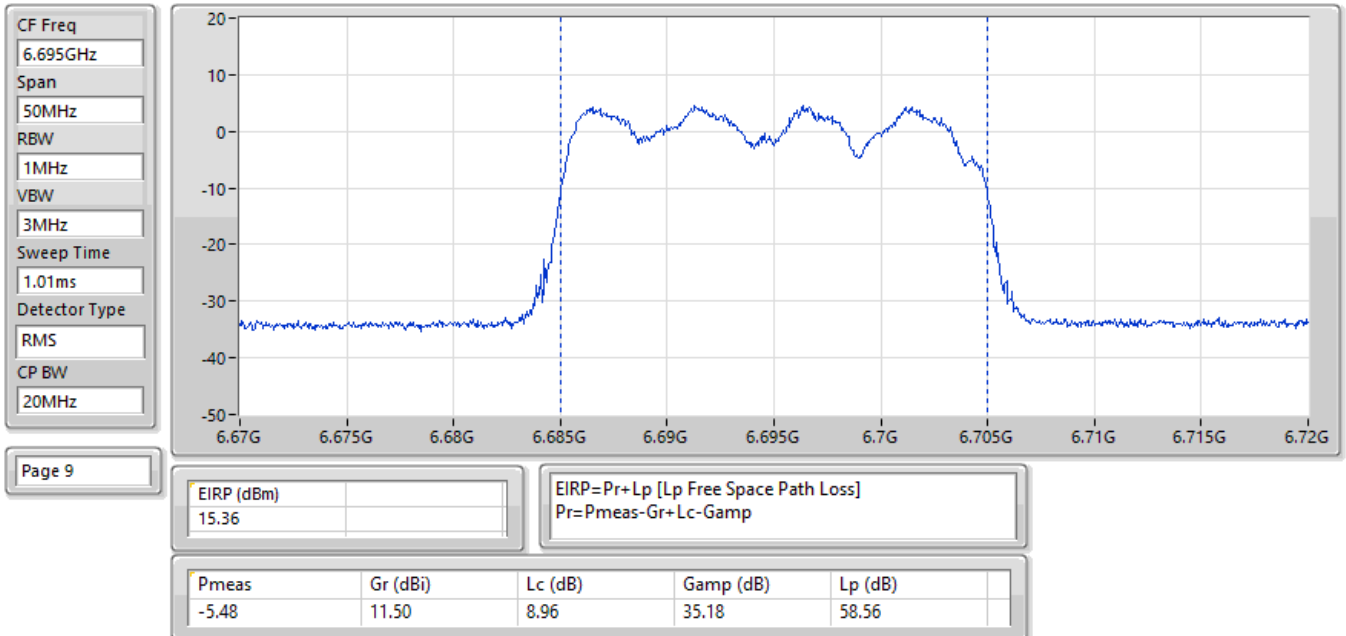


EIRP:Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6875MHz;TX

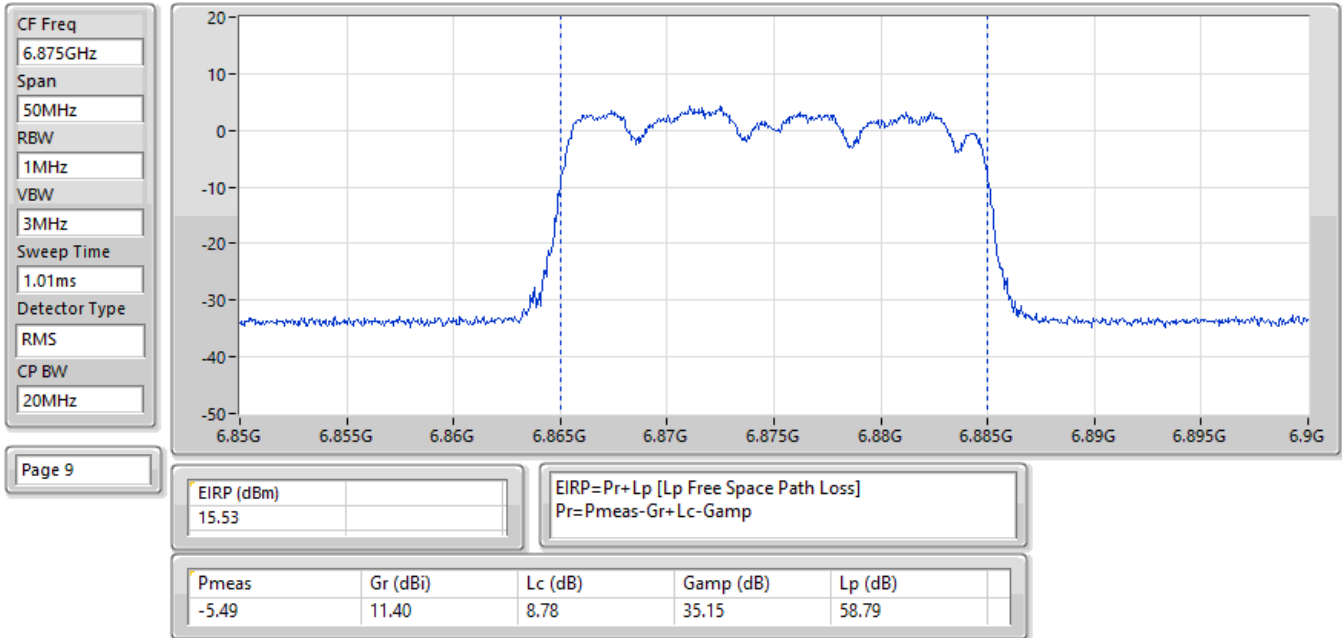


EIRP:Band:7.0G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6895MHz;TX

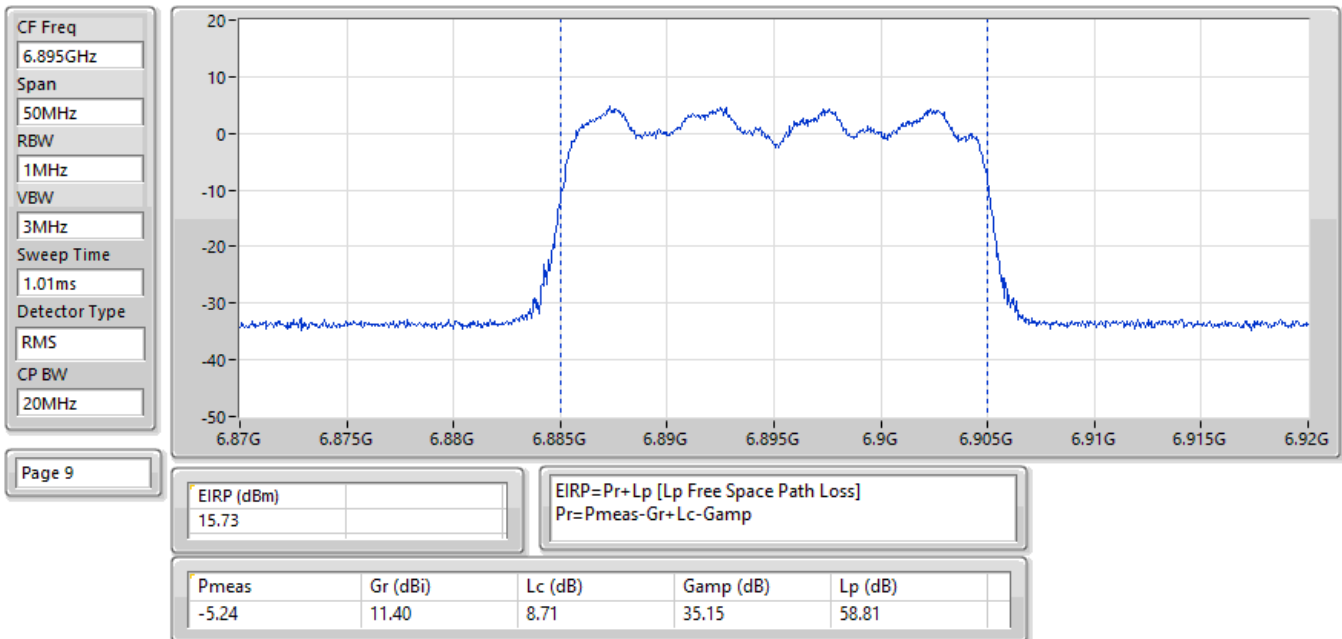


EIRP:Band:7.0G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6995MHz;TX

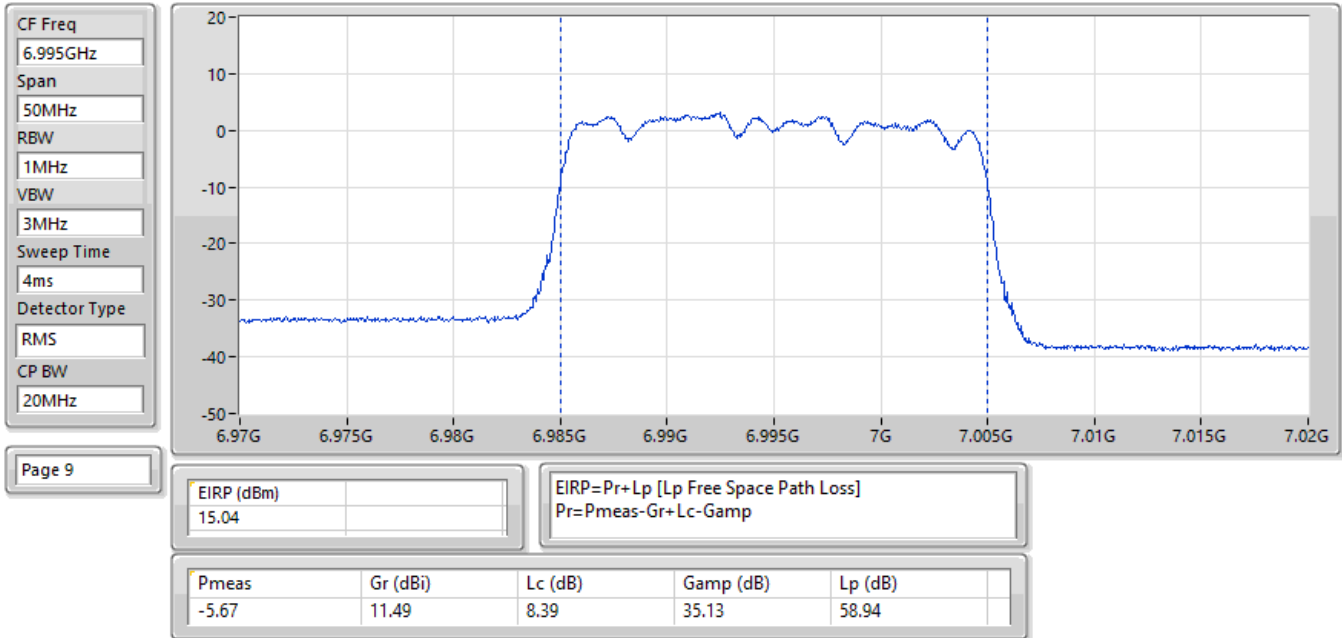


EIRP:Band:7.0G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:7095MHz;TX

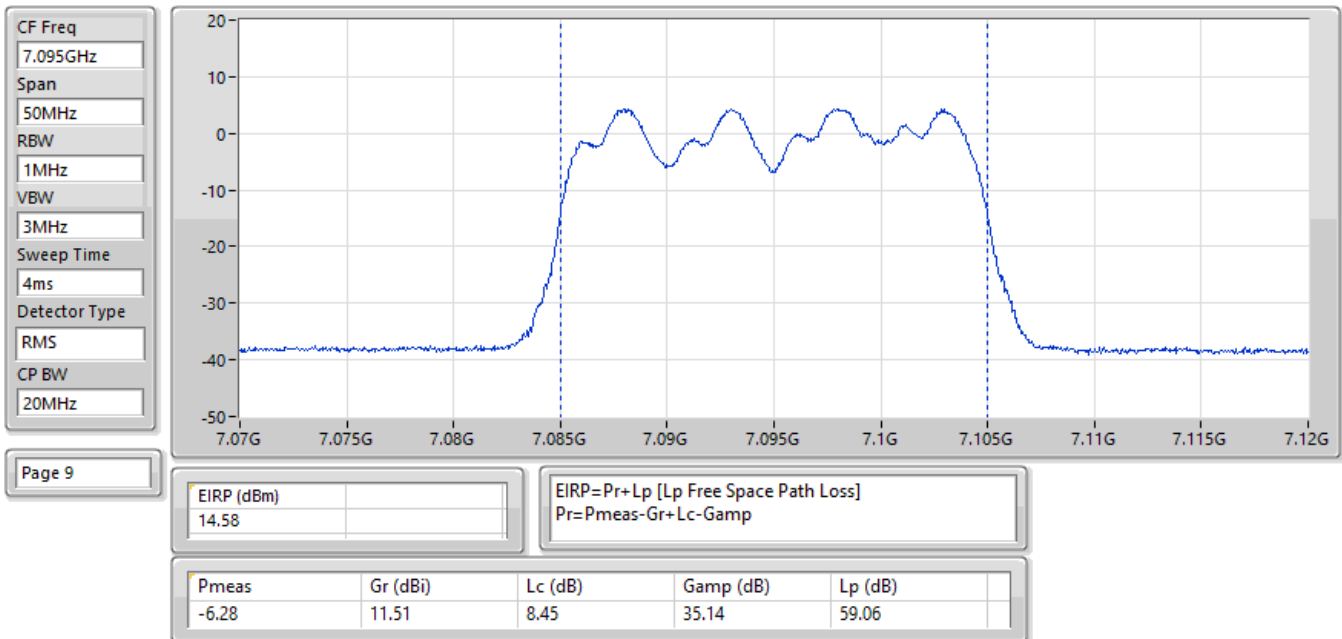


EIRP:Band:7.0G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:7115MHz;TX

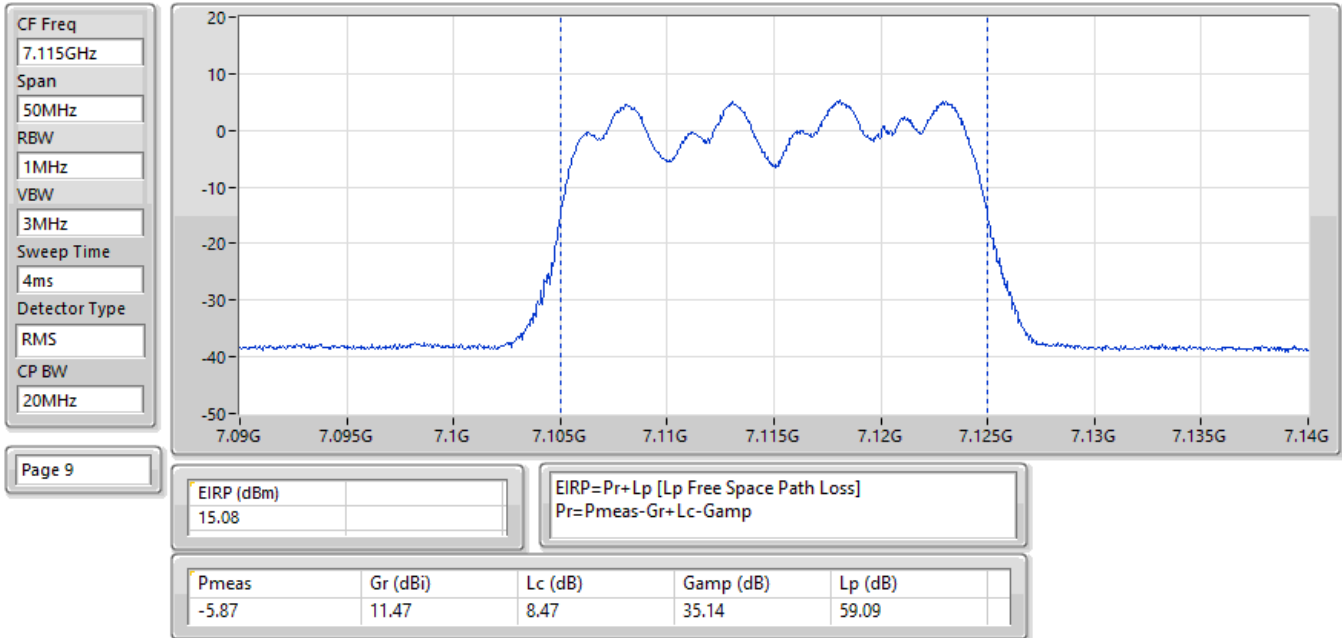


EIRP:Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6565MHz;TX

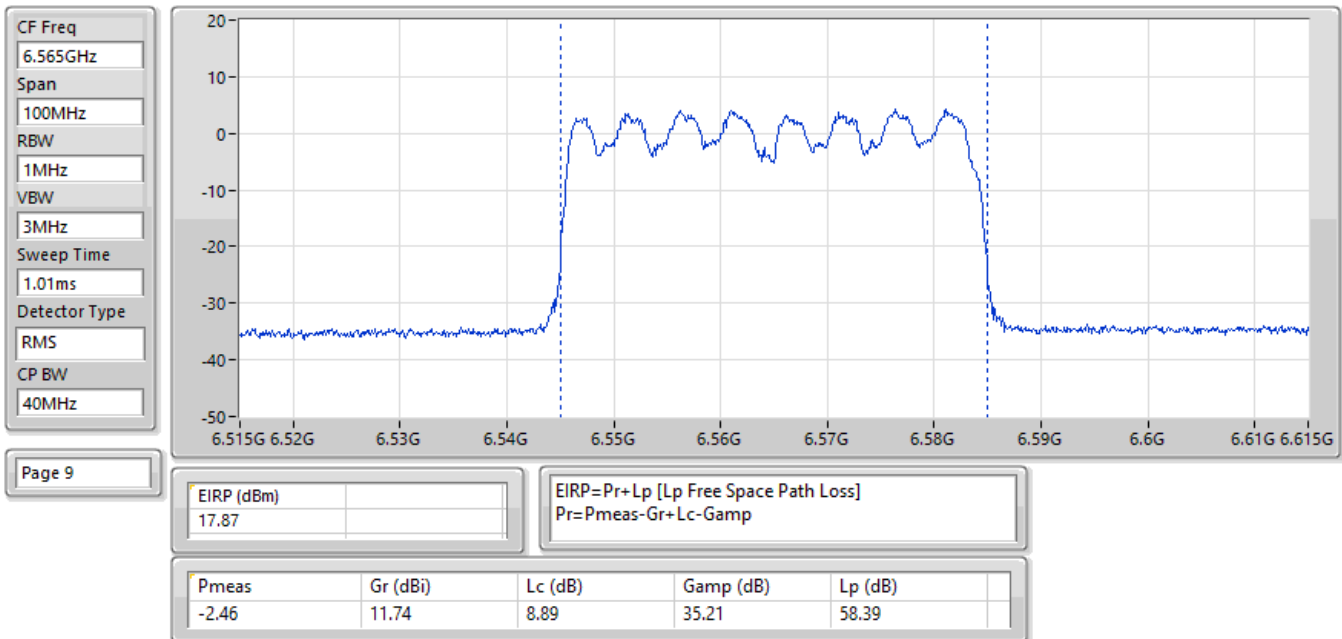


EIRP:Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6685MHz;TX

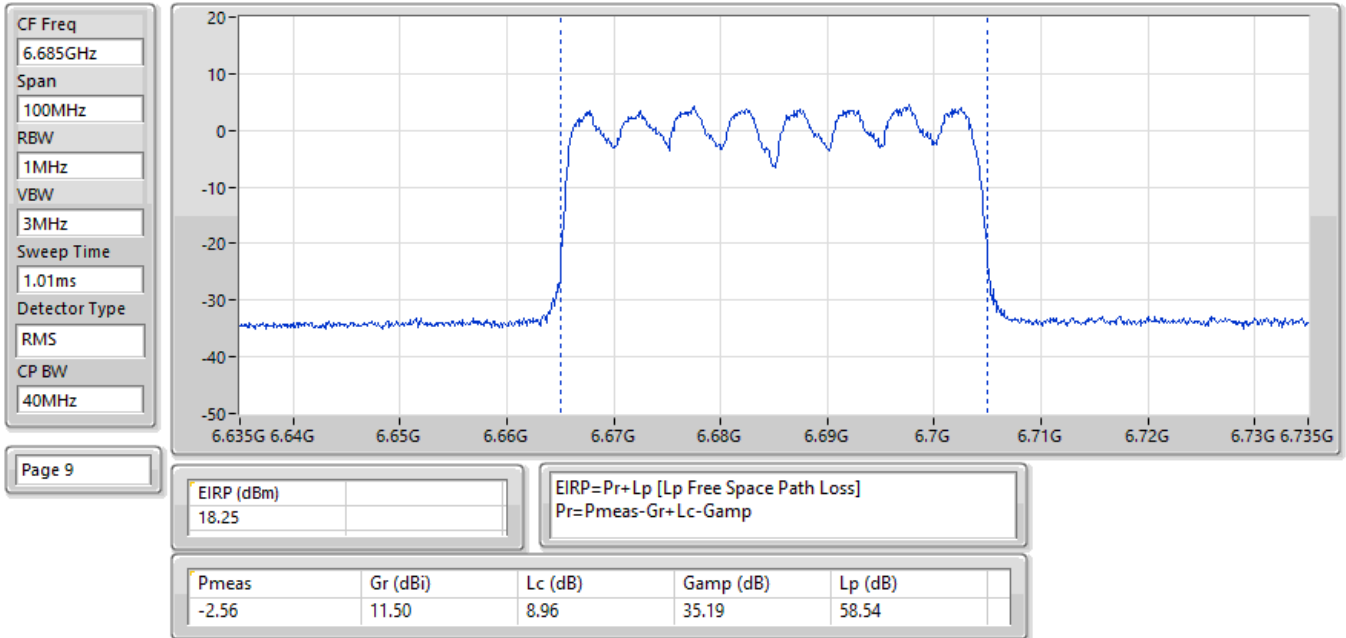


EIRP:Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6885MHz;TX

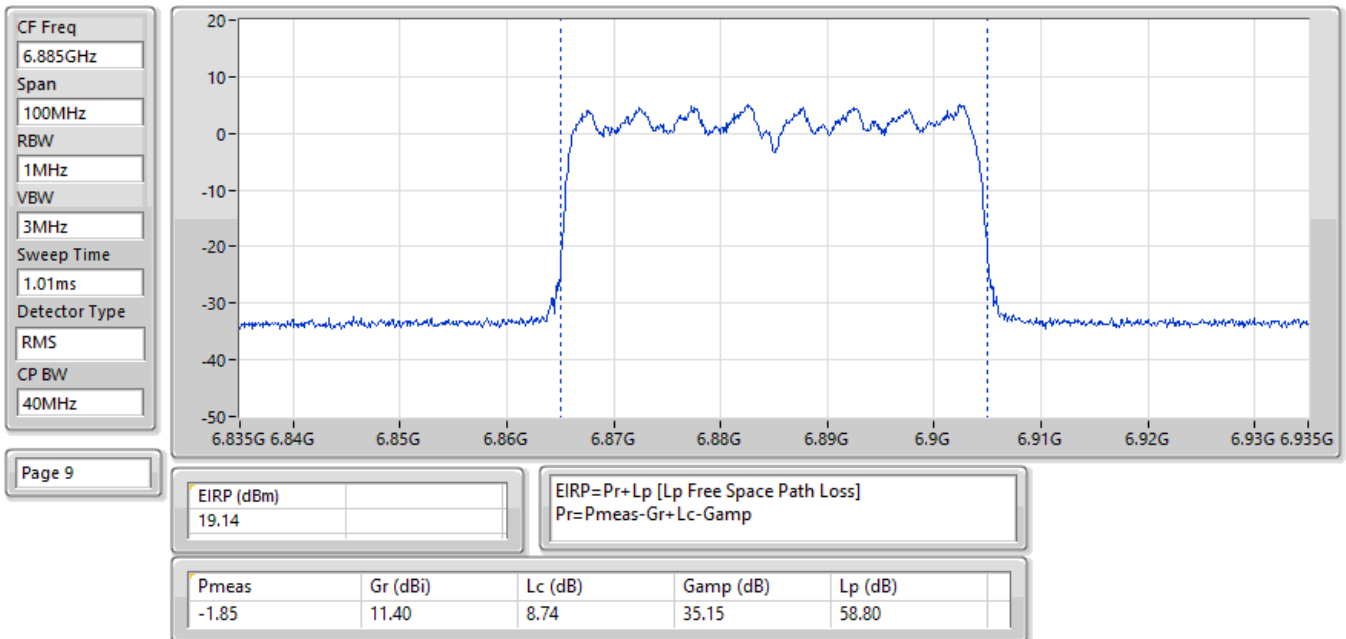


EIRP:Band:7.0G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6925MHz;TX

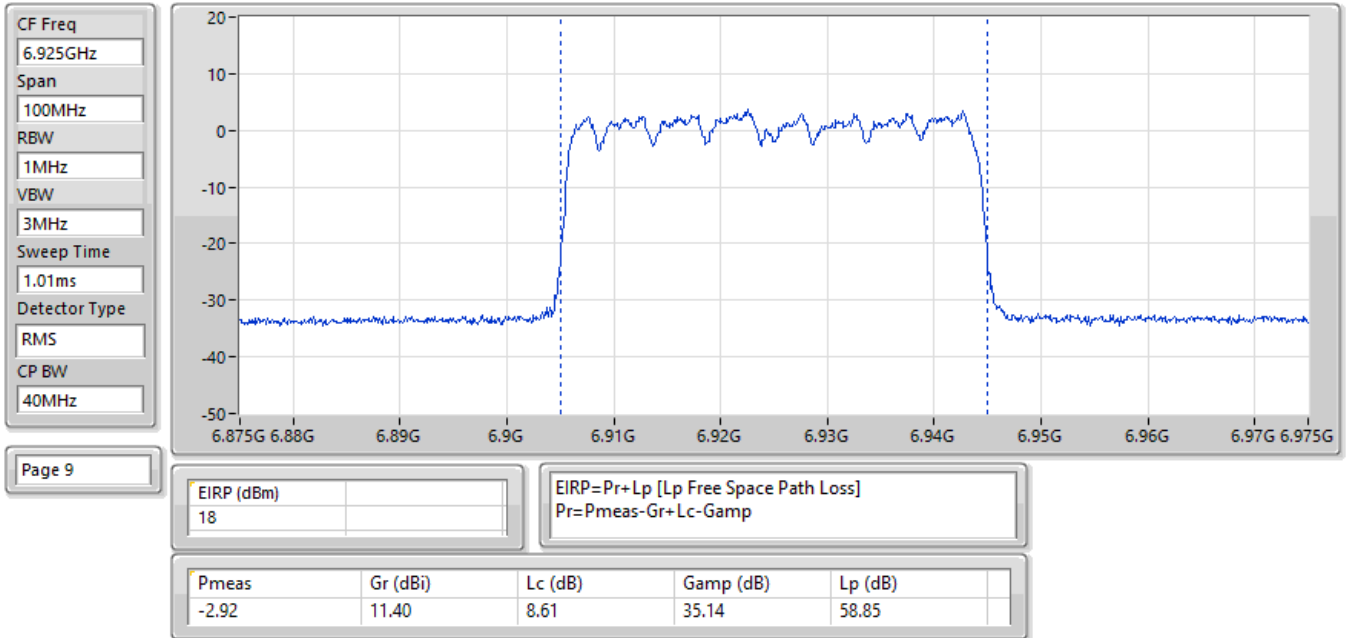


EIRP:Band:7.0G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:7005MHz;TX

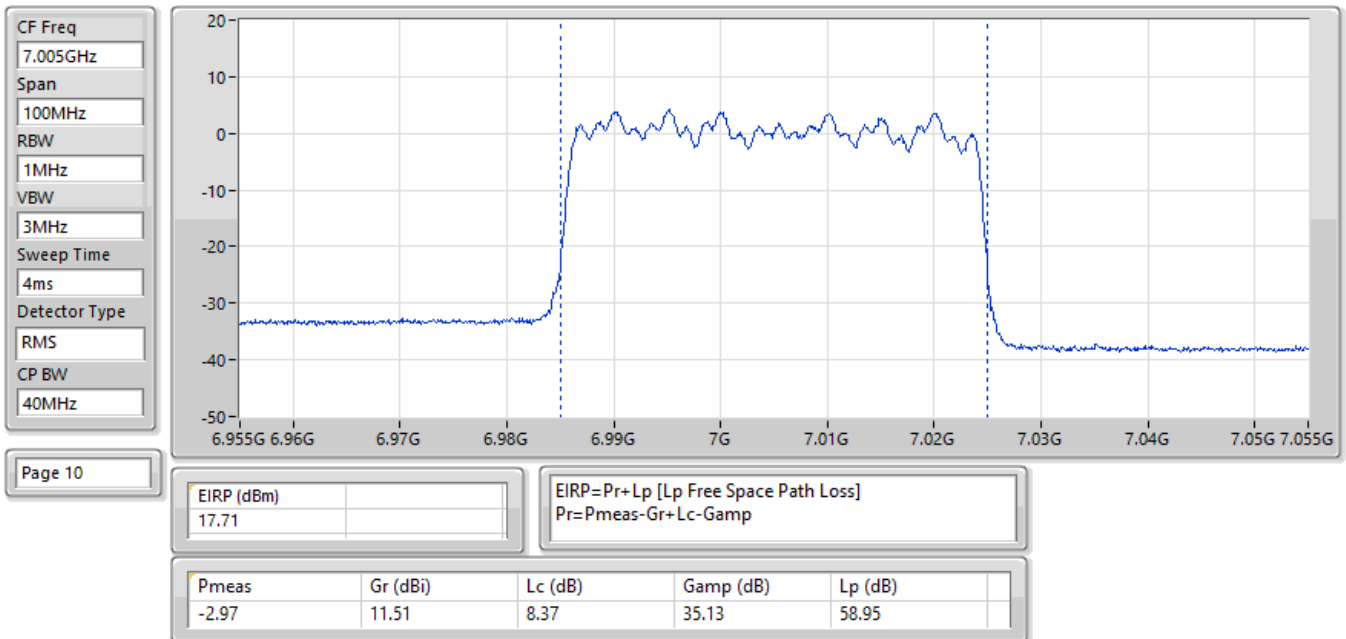


EIRP:Band:7.0G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:7085MHz;TX

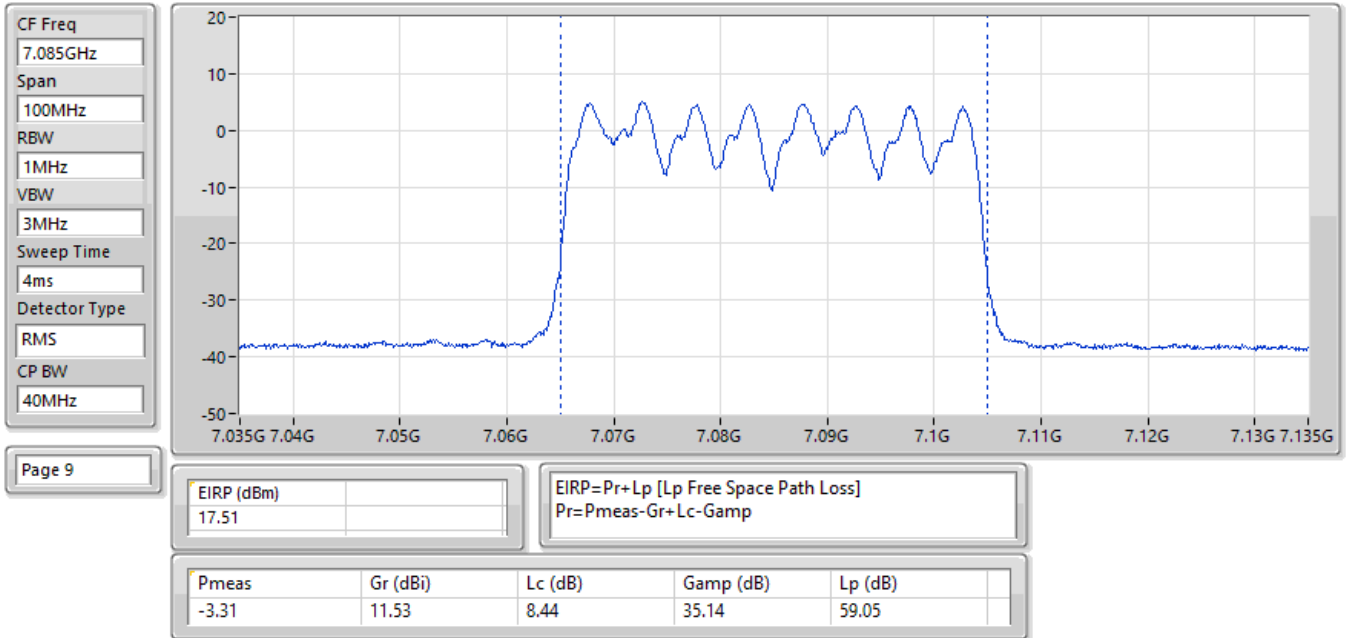


EIRP:Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6625MHz;TX

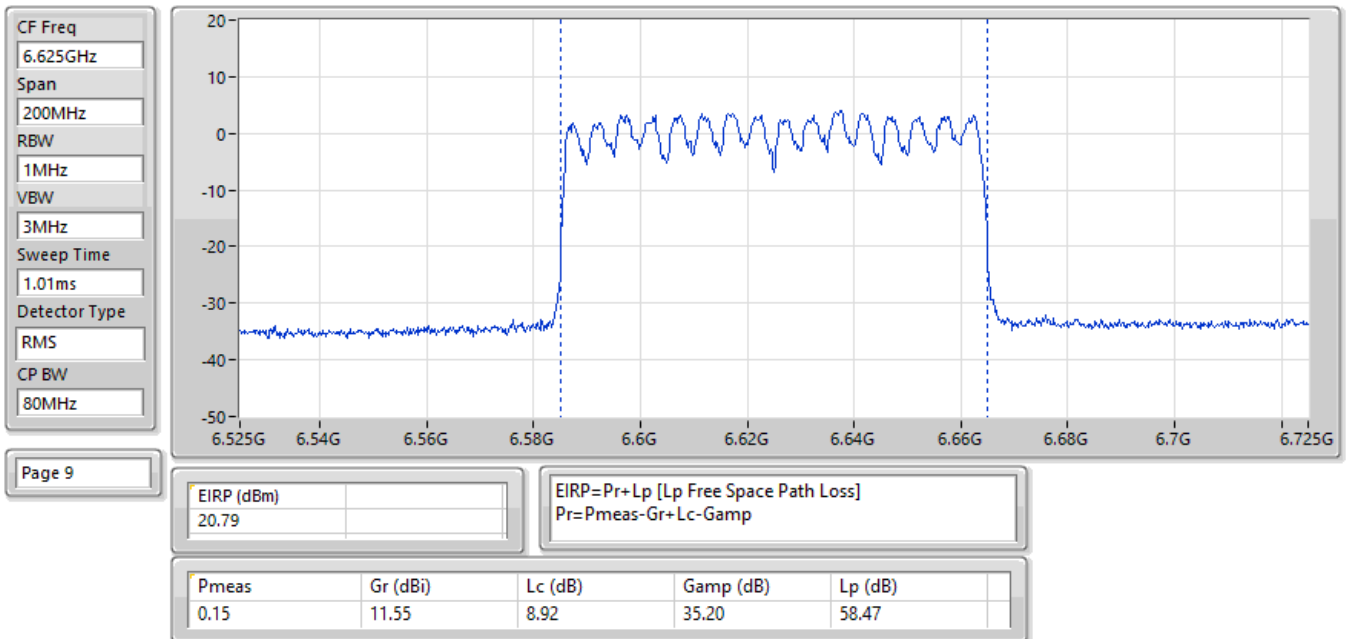


EIRP:Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6705MHz;TX

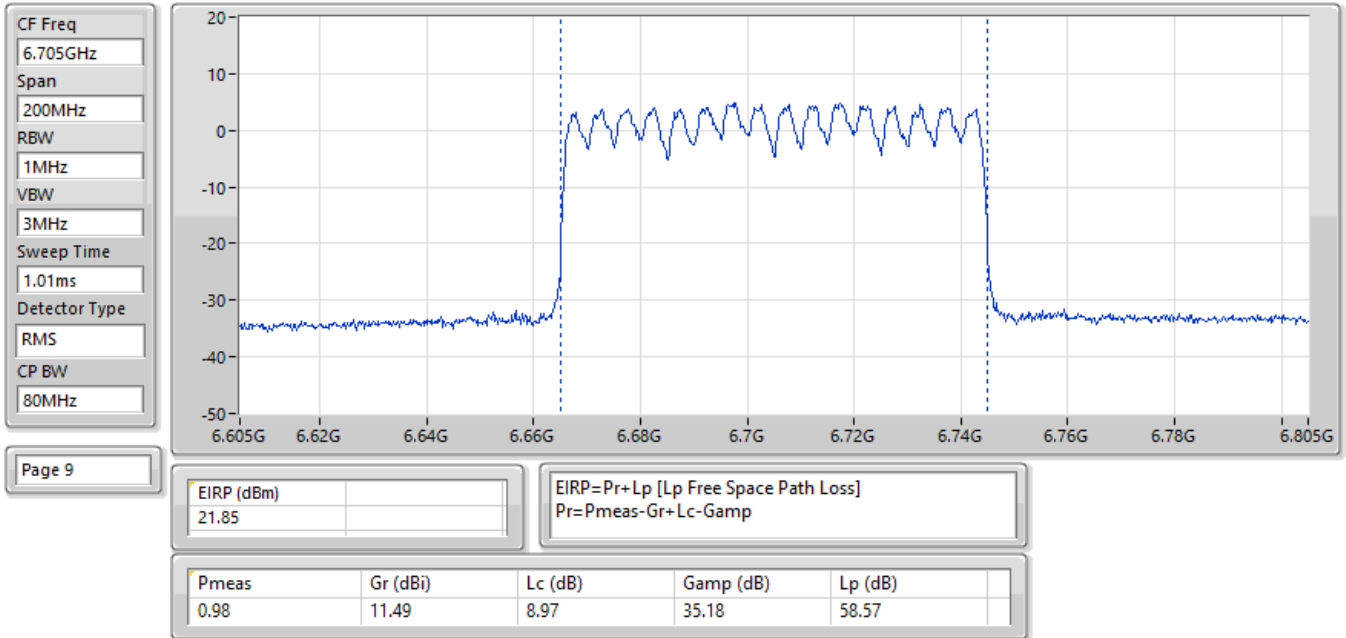


EIRP:Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6785MHz;TX

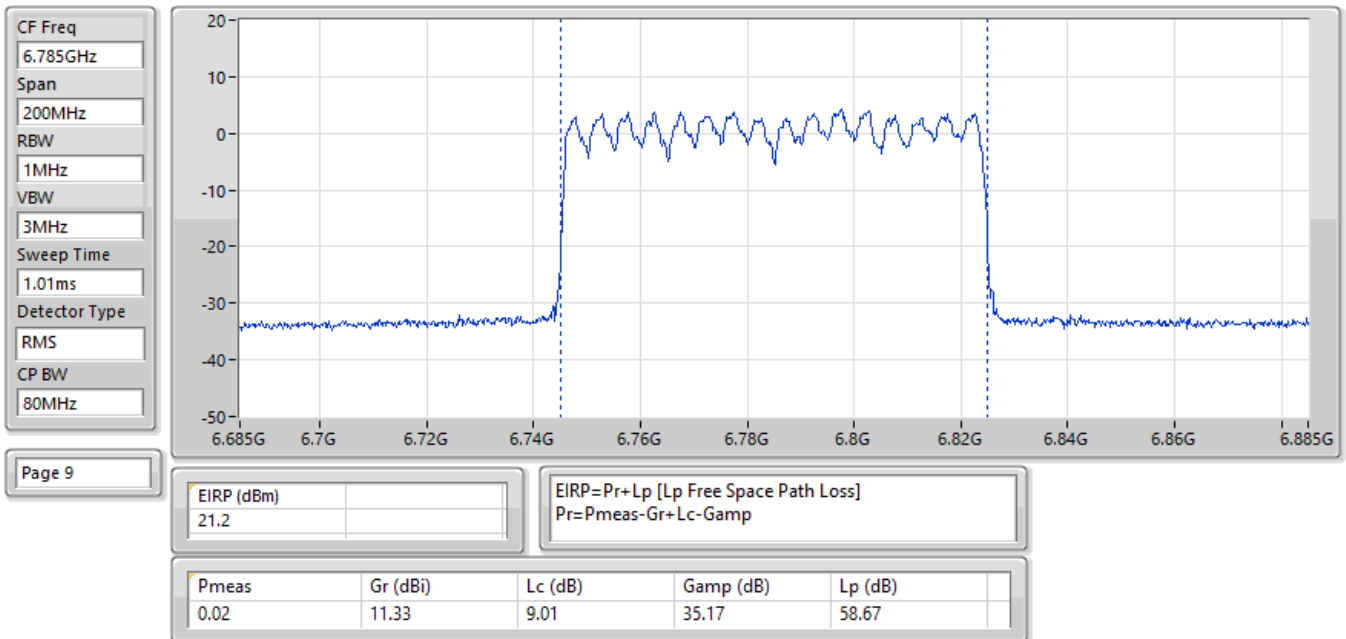


EIRP:Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6865MHz;TX

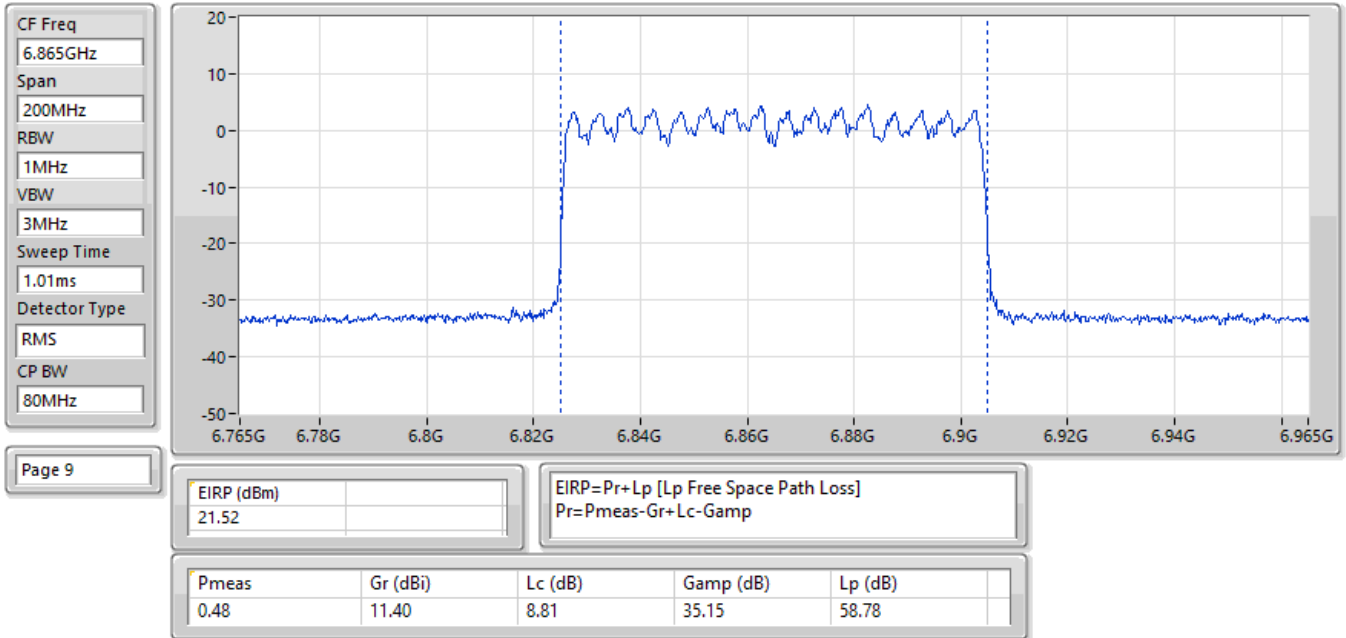


EIRP:Band:7.0G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6945MHz;TX

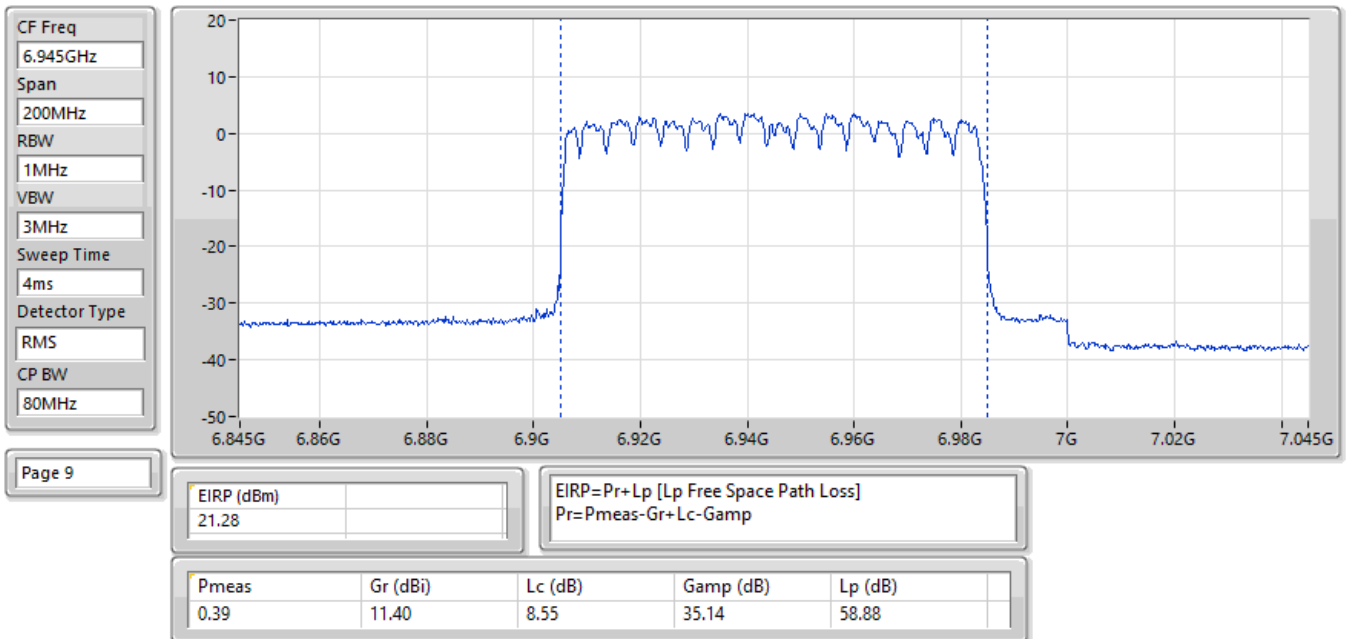


EIRP;Band:7.0G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:7025MHz;TX

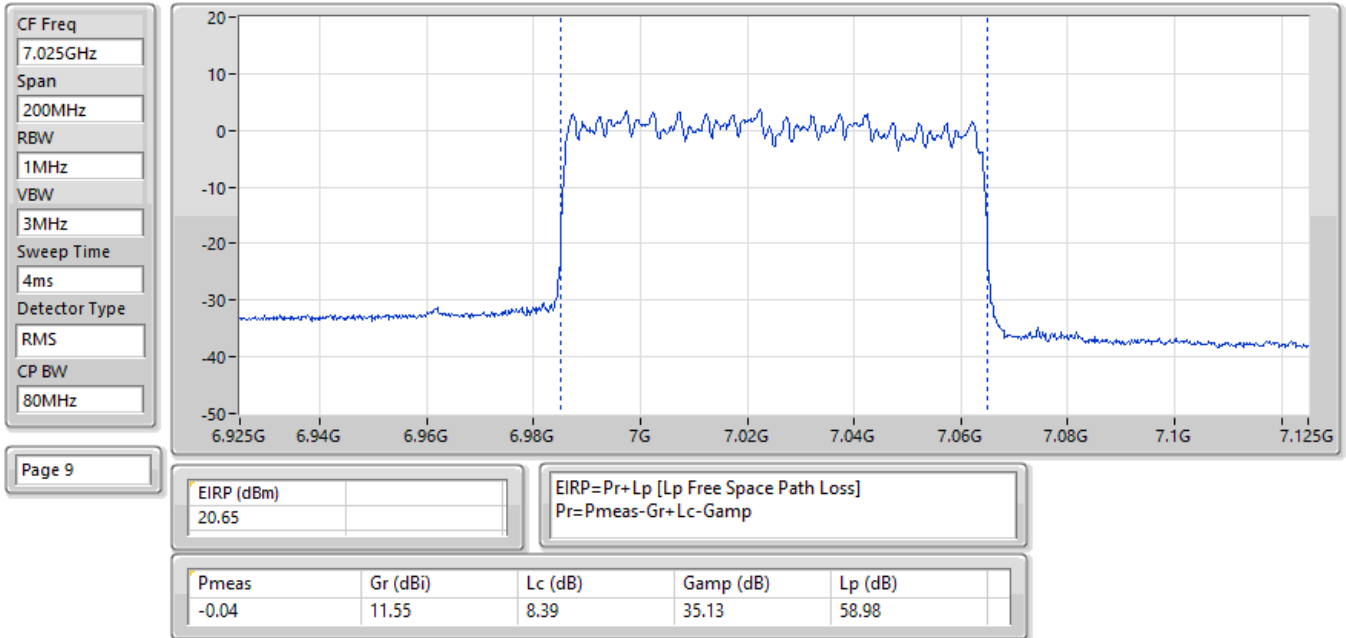


EIRP;Band:6.7G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6665MHz;TX

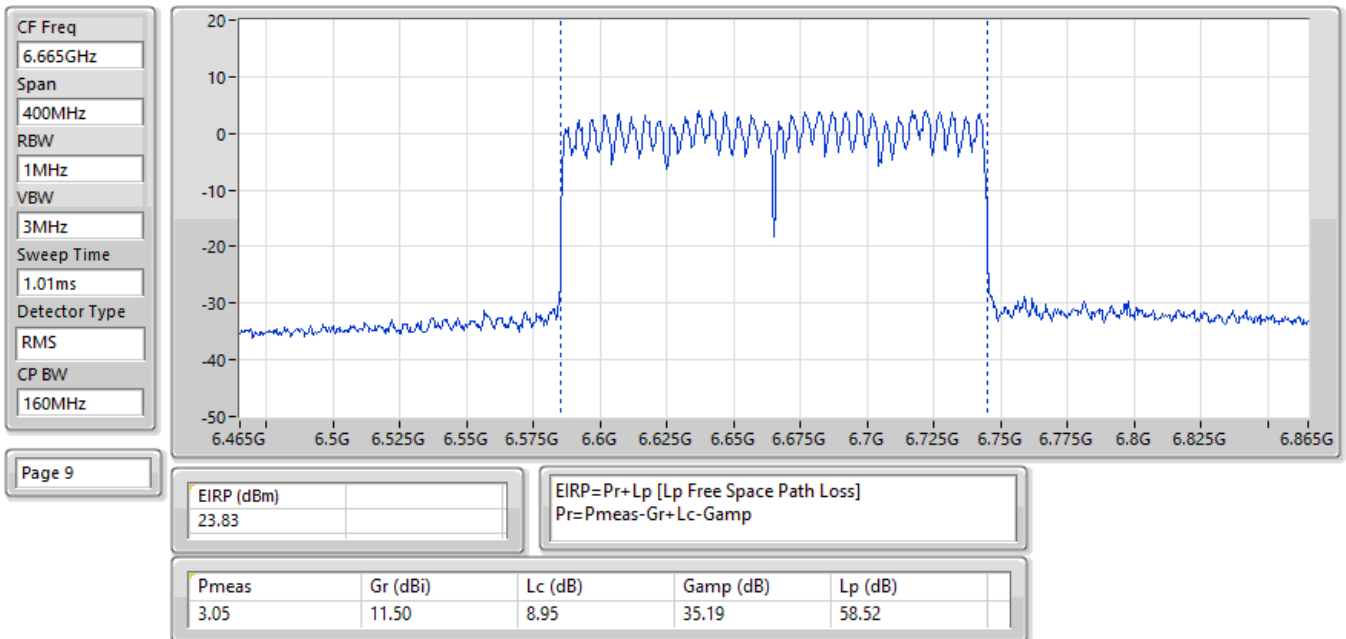


EIRP;Band:6.7G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6825MHz;TX

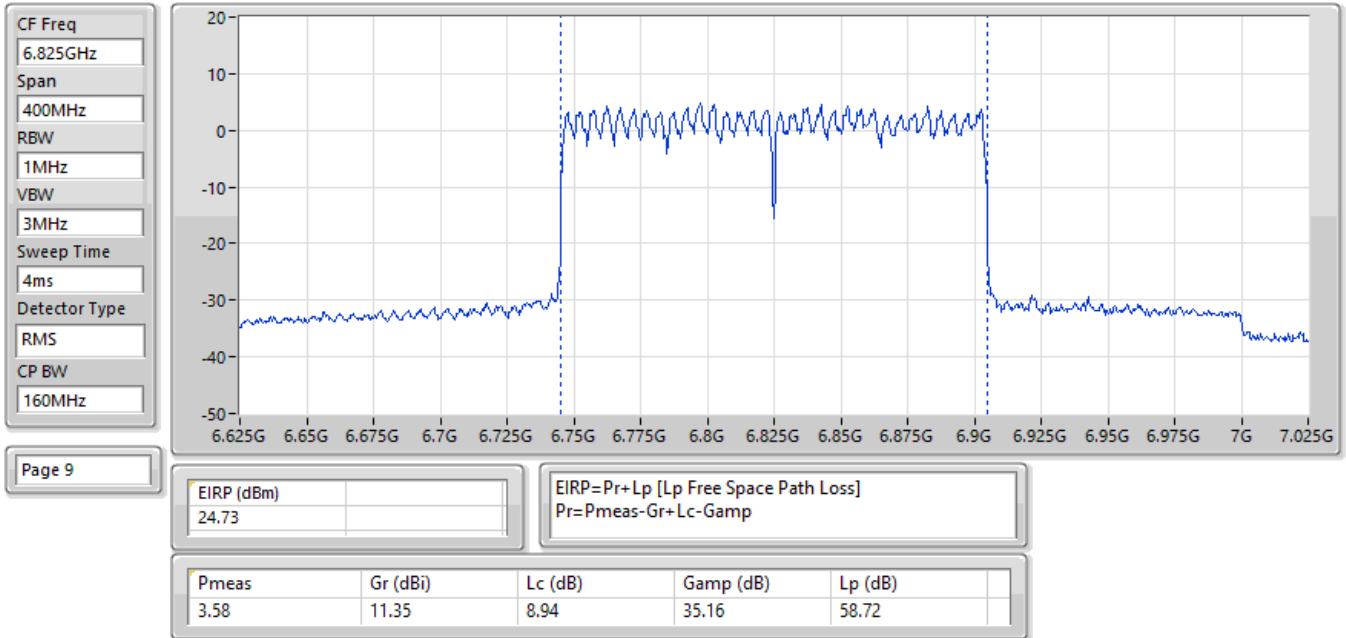


EIRP;Band:7.0G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6985MHz;TX

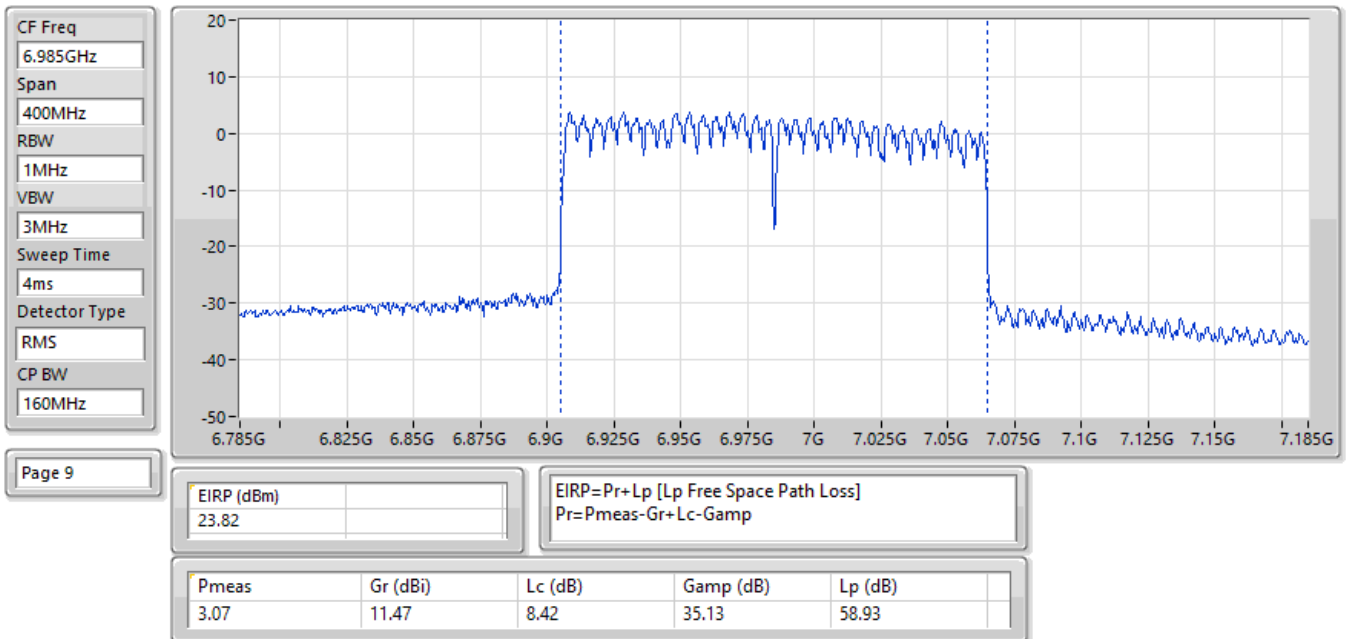

EIRP;Band:6.7G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6745MHz;TX

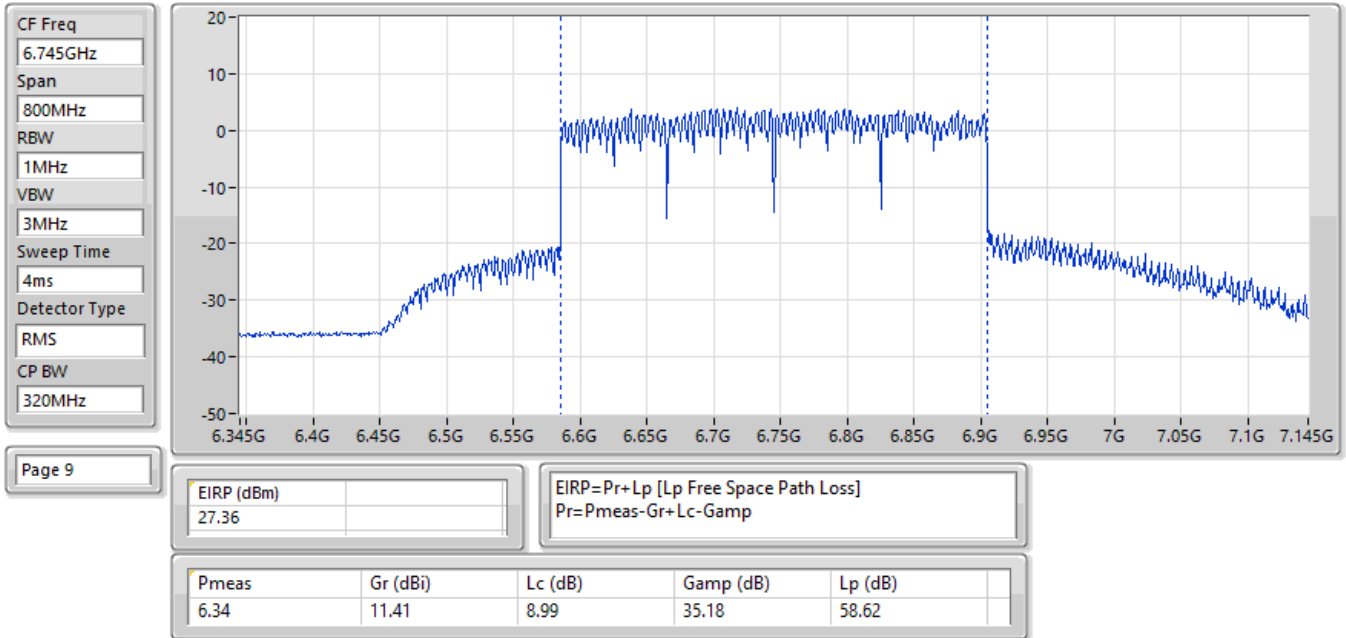

EIRP;Band:6.7G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6905MHz;TX

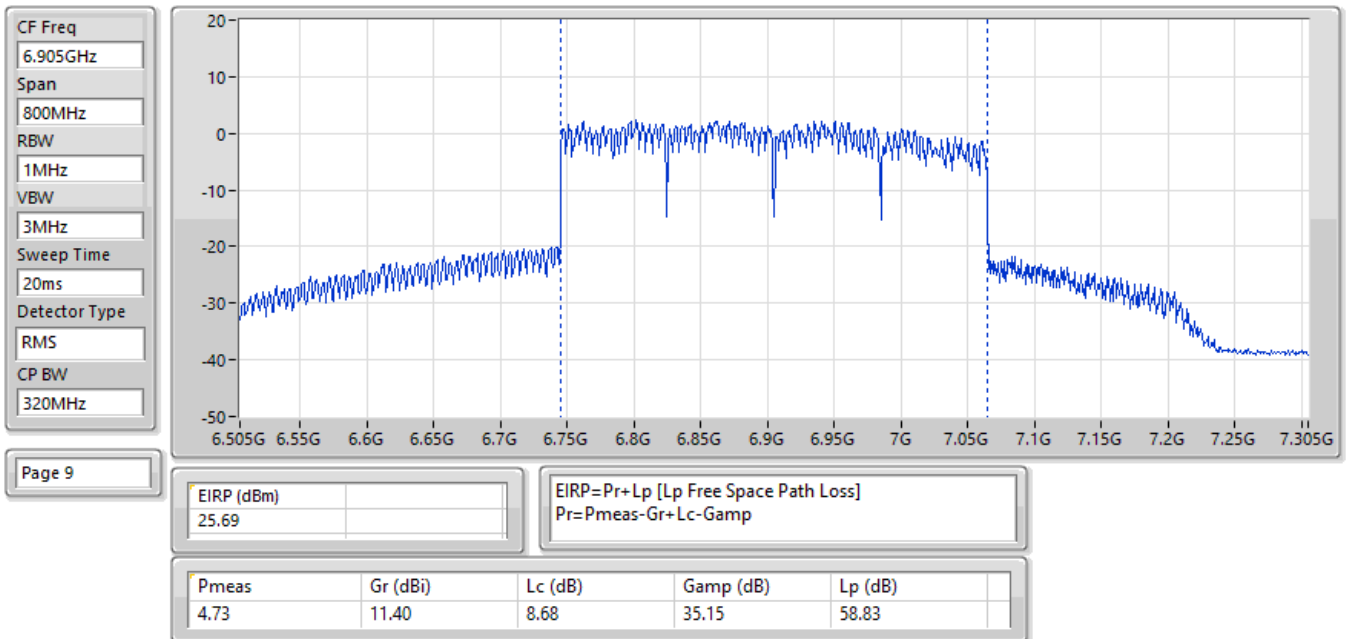



Test Mode: Mode 5

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
6.525-6.875GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	14.31	0.02698	20.33	0.10789
802.11be EHT40-BF_Nss1,(MCS0)_4TX	14.93	0.03112	20.95	0.12445
802.11be EHT80-BF_Nss1,(MCS0)_4TX	17.08	0.05105	23.10	0.20417
802.11be EHT160-BF_Nss1,(MCS0)_4TX	18.64	0.07311	24.66	0.29242
802.11be EHT320-BF_Nss1,(MCS0)_4TX	19.73	0.09397	25.75	0.37584
6.875-7.125GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	12.33	0.01710	18.35	0.06839
802.11be EHT40-BF_Nss1,(MCS0)_4TX	13.85	0.02427	19.87	0.09705
802.11be EHT80-BF_Nss1,(MCS0)_4TX	16.94	0.04943	22.96	0.19770
802.11be EHT160-BF_Nss1,(MCS0)_4TX	18.02	0.06339	24.04	0.25351


Result

Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-
6535MHz	Pass	20.33	30.00
6695MHz	Pass	18.71	30.00
6875MHz Straddle 6.525-6.875GHz	Pass	17.65	30.00
6895MHz	Pass	18.35	30.00
6995MHz	Pass	17.91	30.00
7095MHz	Pass	17.22	30.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-
6565MHz	Pass	20.54	30.00
6685MHz	Pass	20.95	30.00
6885MHz Straddle 6.525-6.875GHz	Pass	20.03	30.00
6925MHz	Pass	19.68	30.00
7005MHz	Pass	19.87	30.00
7085MHz	Pass	19.52	30.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-
6625MHz	Pass	23.10	30.00
6705MHz	Pass	23.07	30.00
6785MHz	Pass	23.06	30.00
6865MHz Straddle 6.525-6.875GHz	Pass	21.88	30.00
6945MHz	Pass	22.65	30.00
7025MHz	Pass	22.96	30.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-
6665MHz	Pass	24.66	30.00
6825MHz Straddle 6.525-6.875GHz	Pass	22.73	30.00
6985MHz	Pass	24.04	30.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-
6745MHz Straddle 6.525-6.875GHz	Pass	25.75	30.00
6905MHz Straddle 6.525-6.875GHz	Pass	24.95	30.00

DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.


03/03/2025

EIRP;Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6535MHz;TX

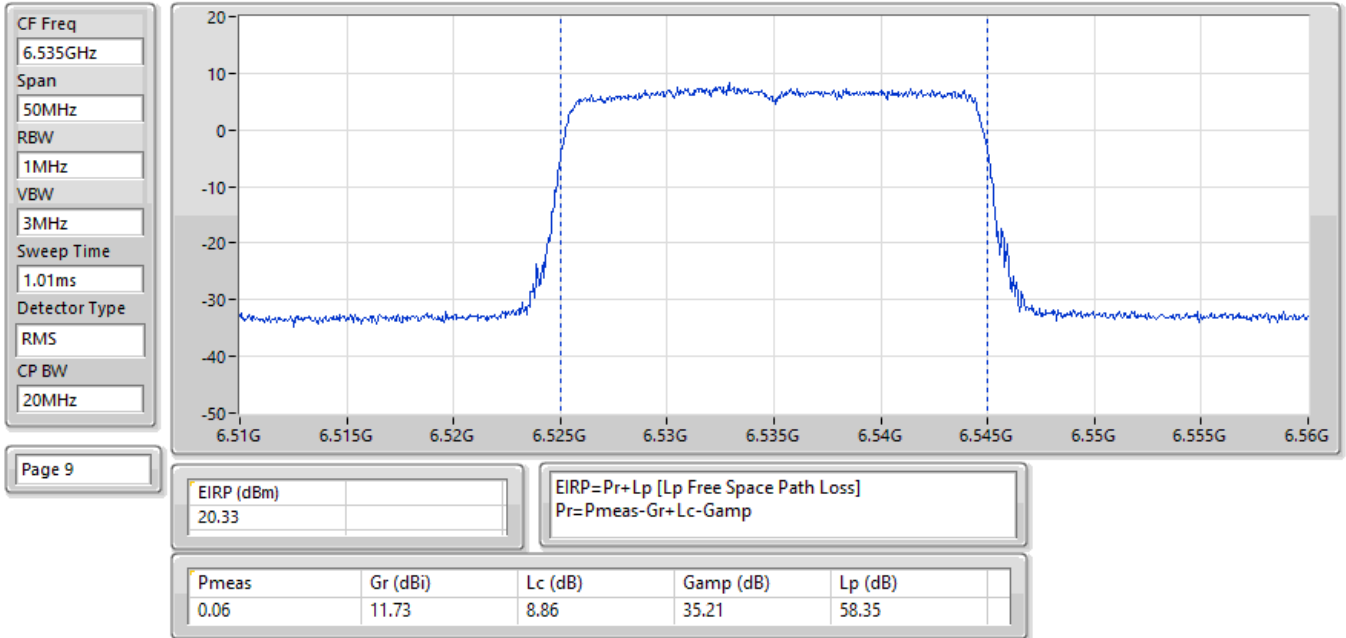


03/03/2025

EIRP;Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6695MHz;TX

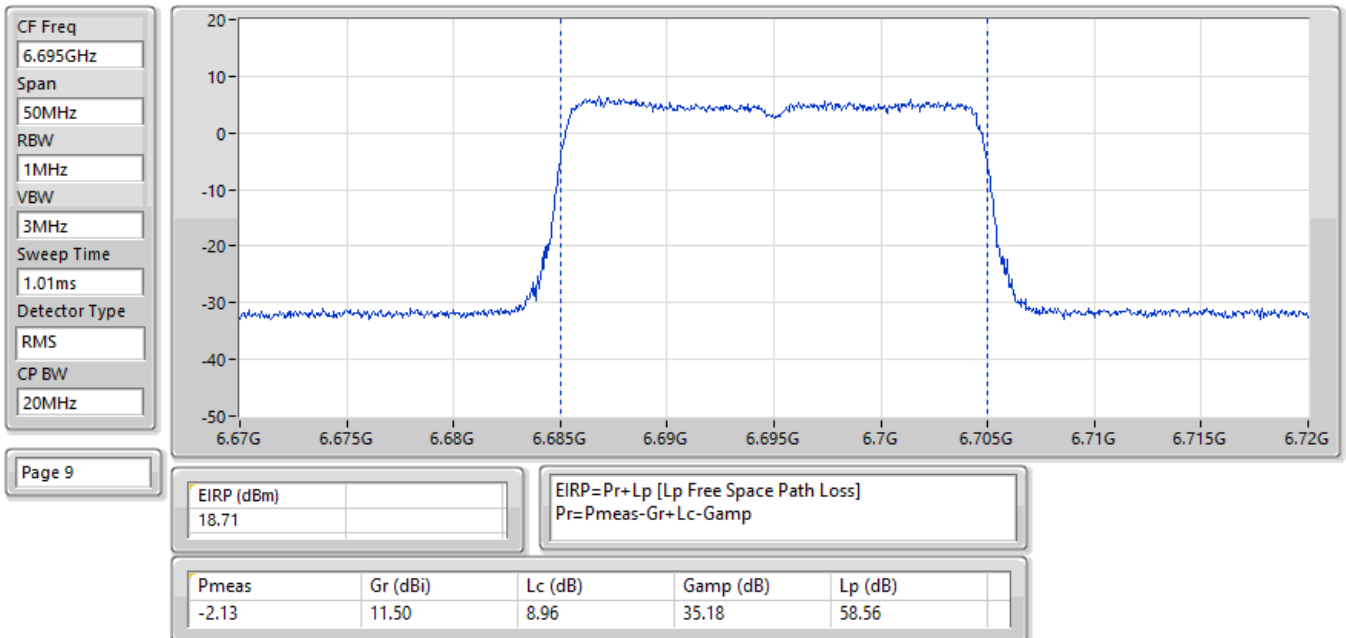


03/03/2025

EIRP:Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6875MHz;TX

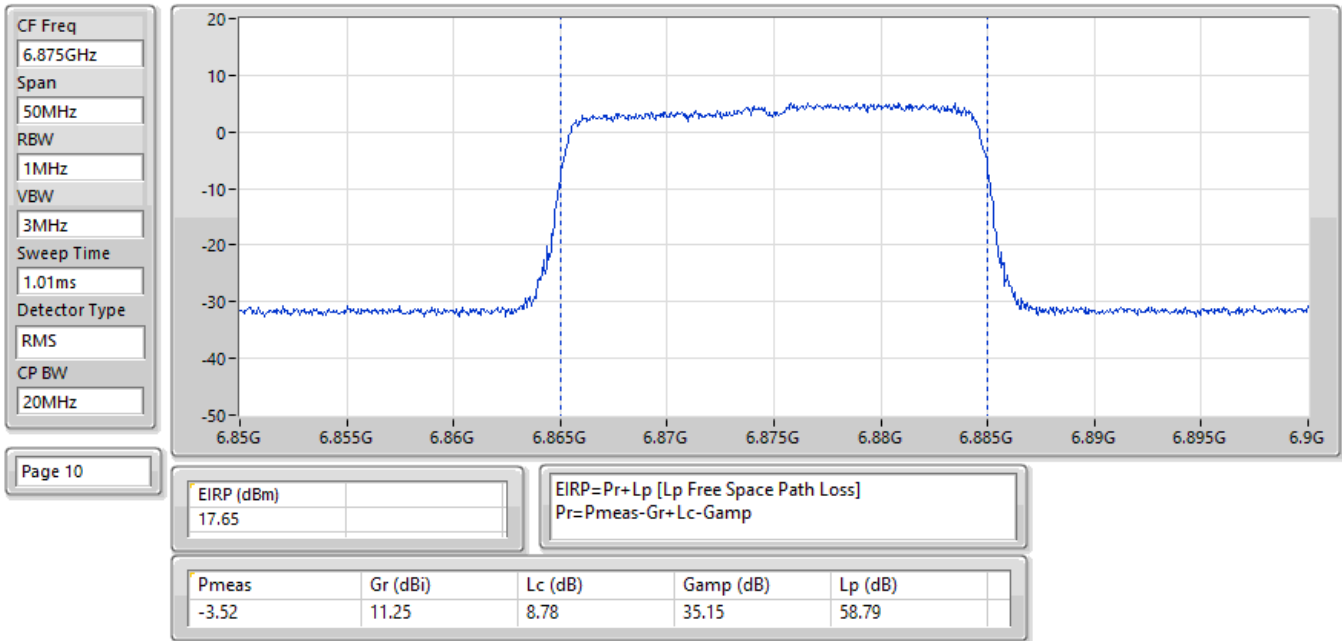


03/03/2025

EIRP:Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6895MHz;TX

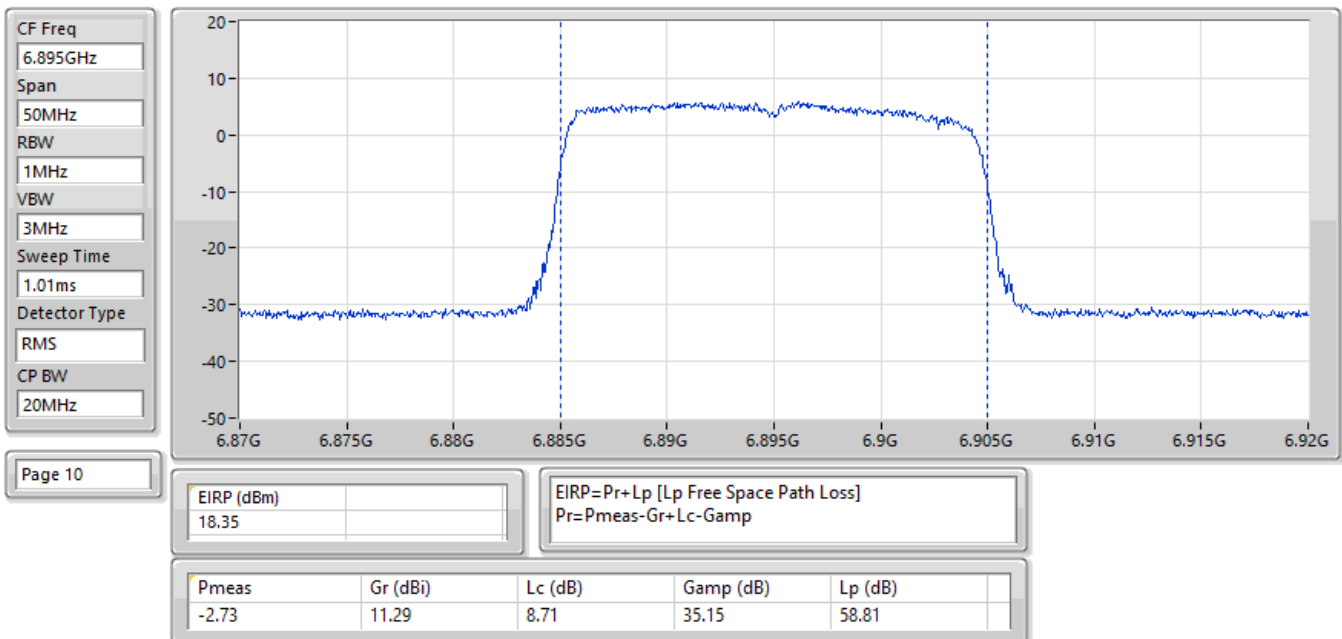


03/03/2025

EIRP:Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6995MHz;TX

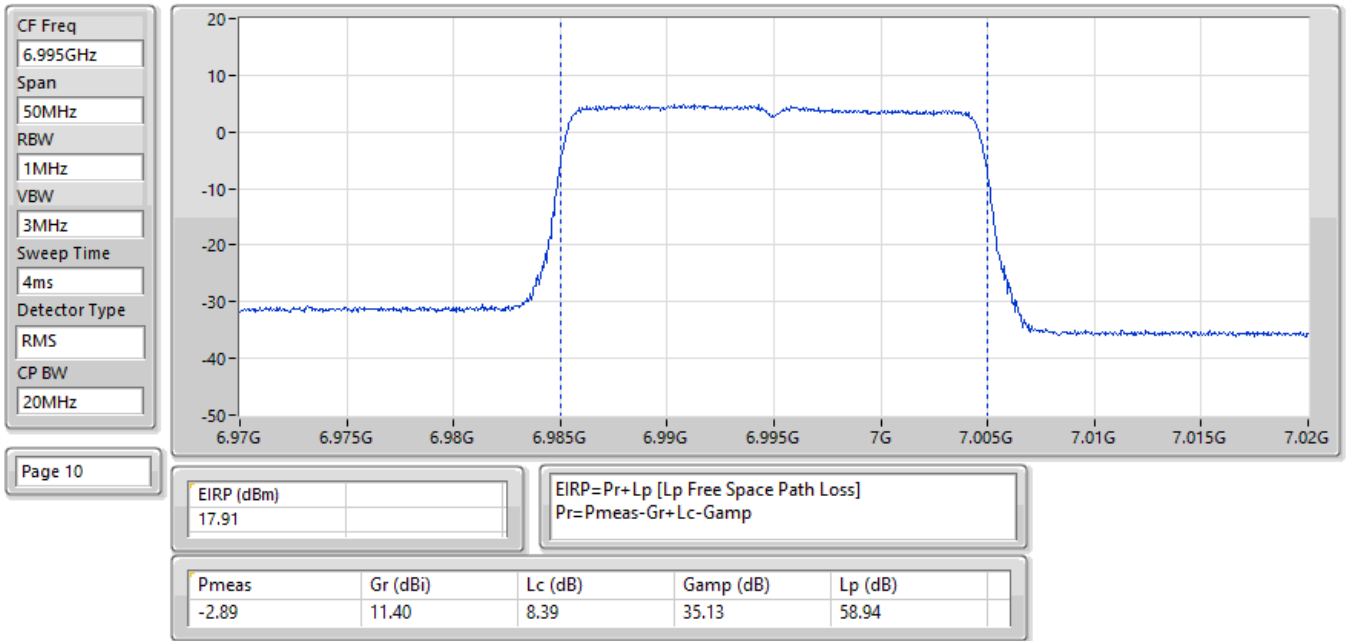


03/03/2025

EIRP:Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:7095MHz;TX

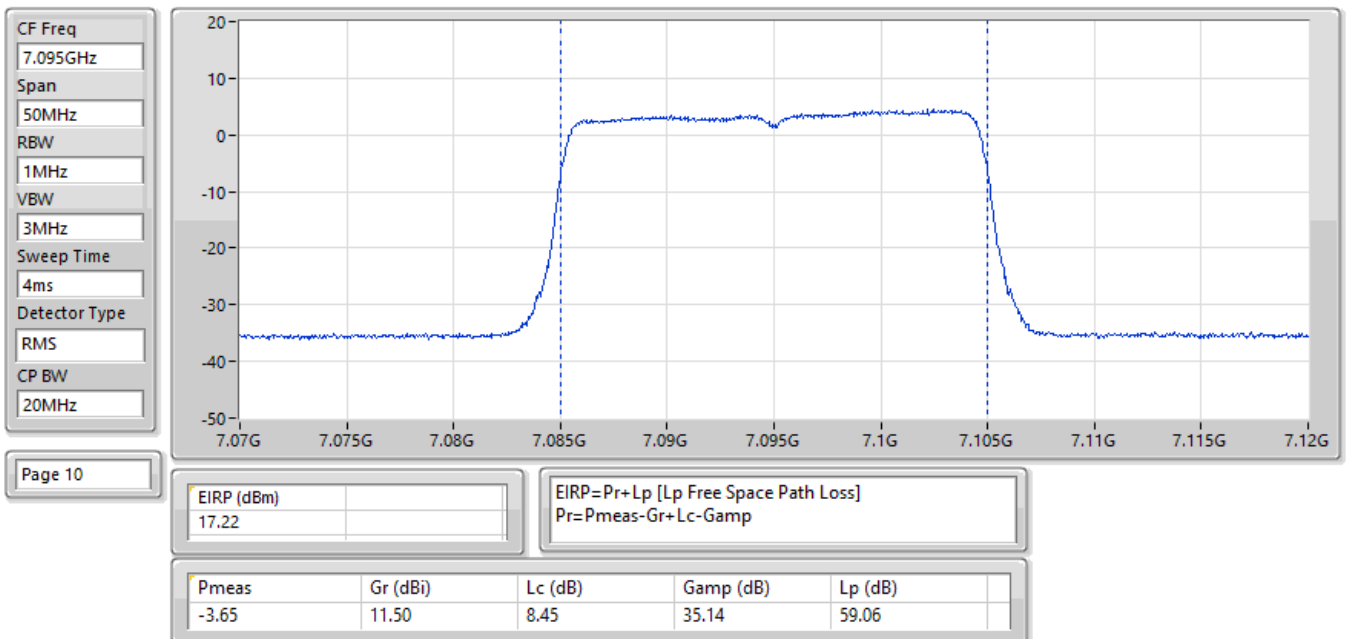


03/03/2025

EIRP:Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6565MHz;TX

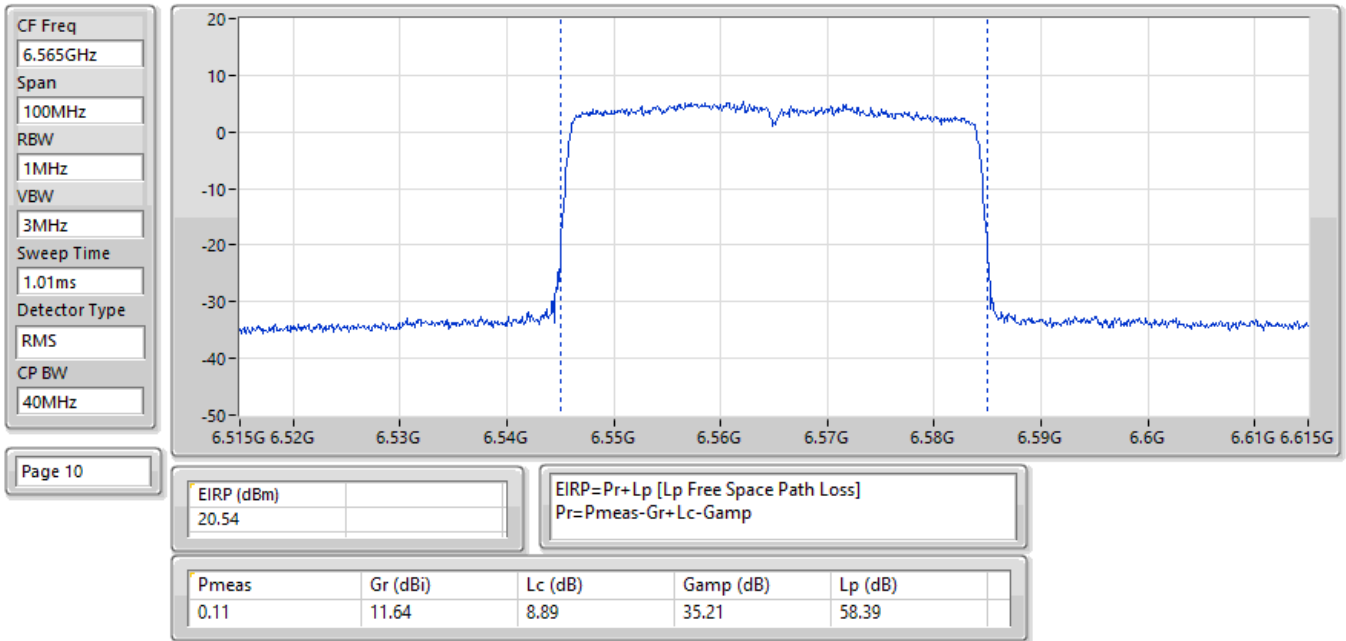


03/03/2025

EIRP:Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6685MHz;TX

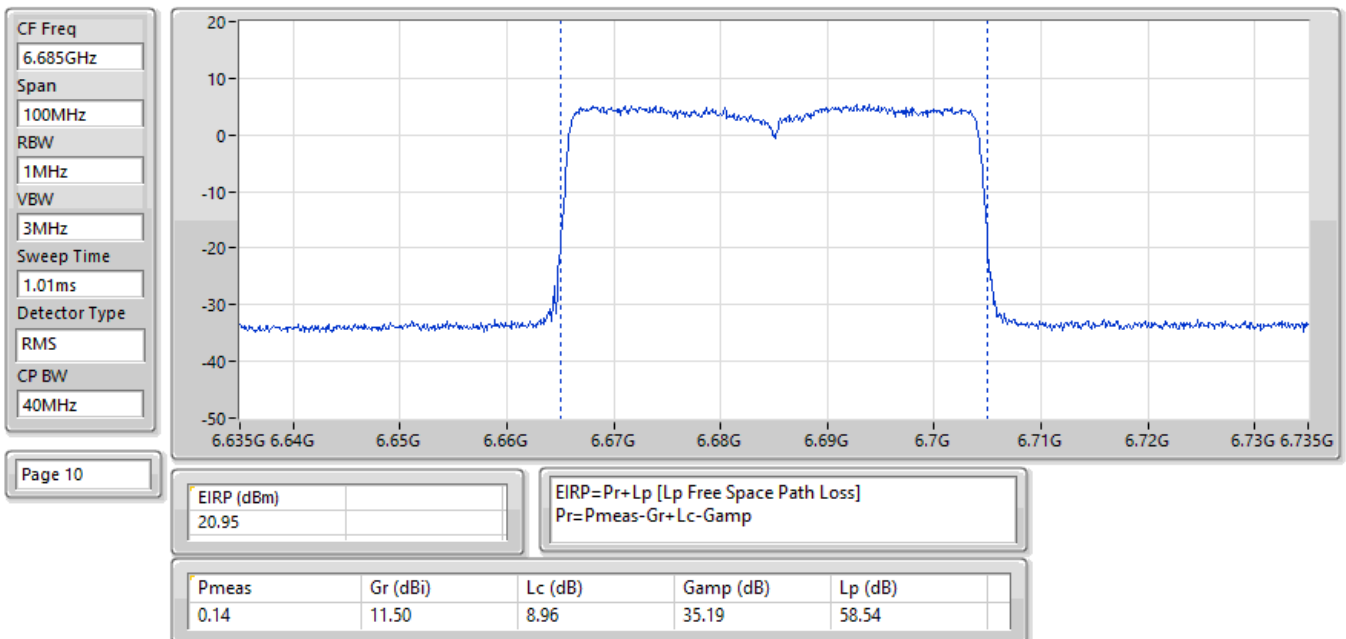


03/03/2025

EIRP:Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6885MHz;TX

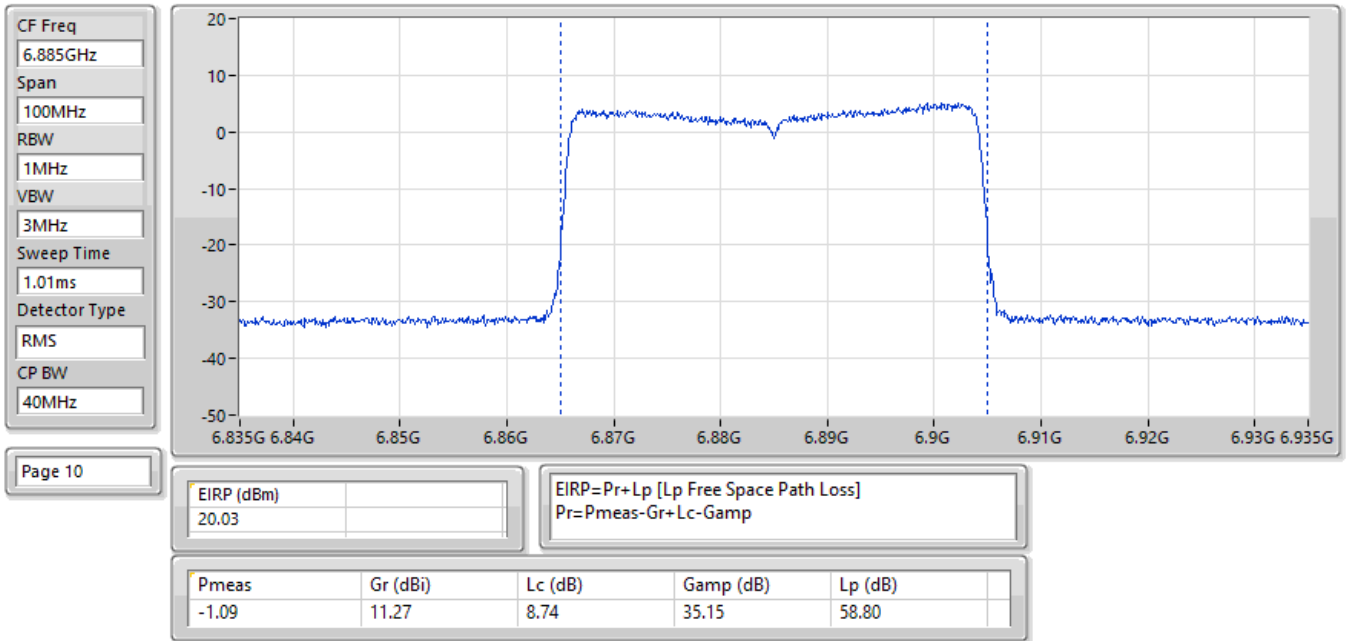


03/03/2025

EIRP:Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6925MHz;TX

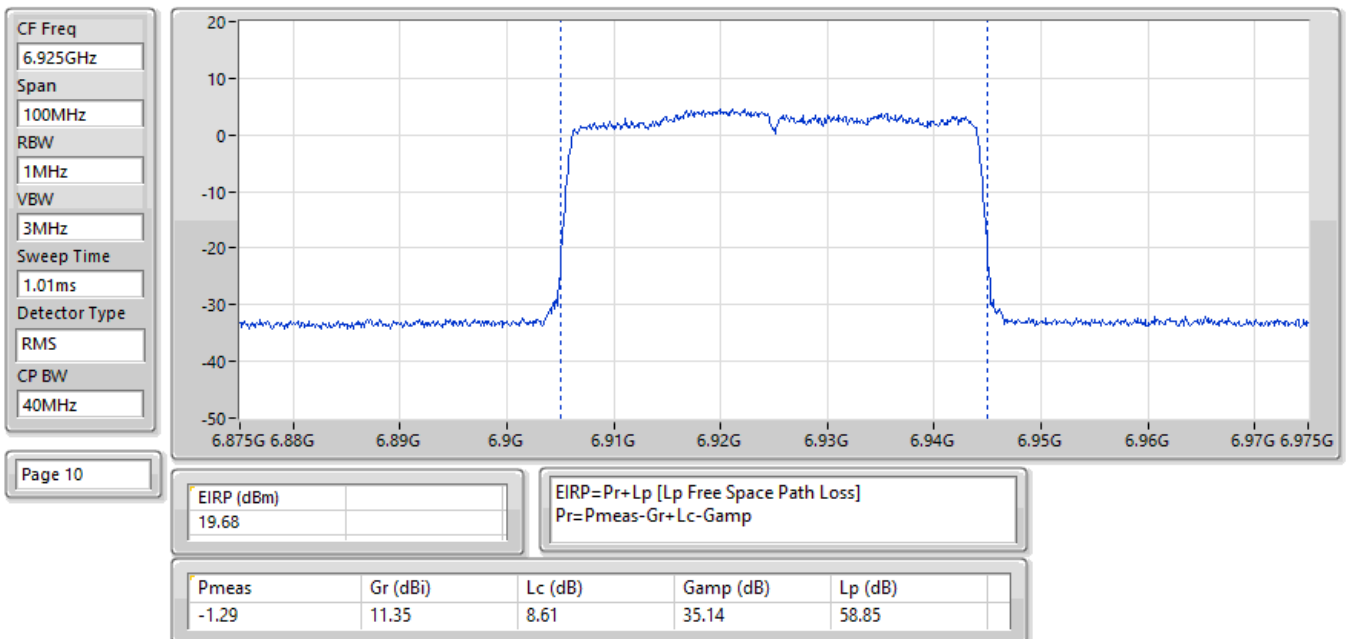


03/03/2025

EIRP:Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:7005MHz;TX

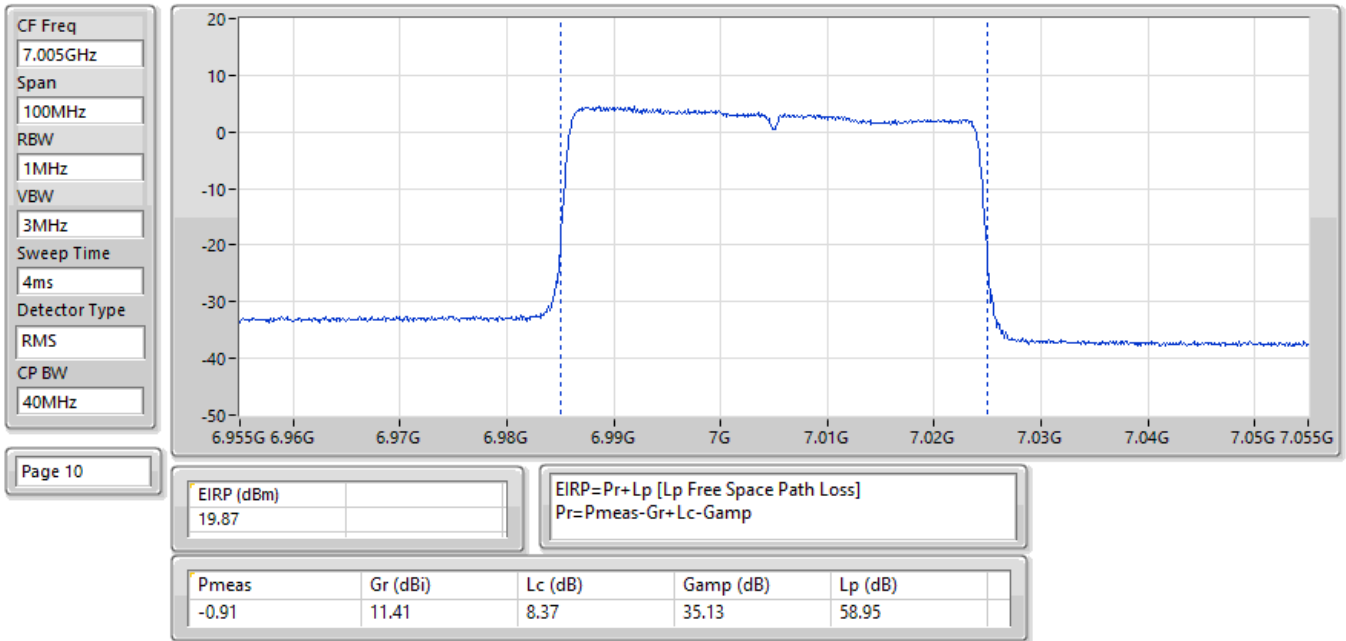


03/03/2025

EIRP:Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:7085MHz;TX

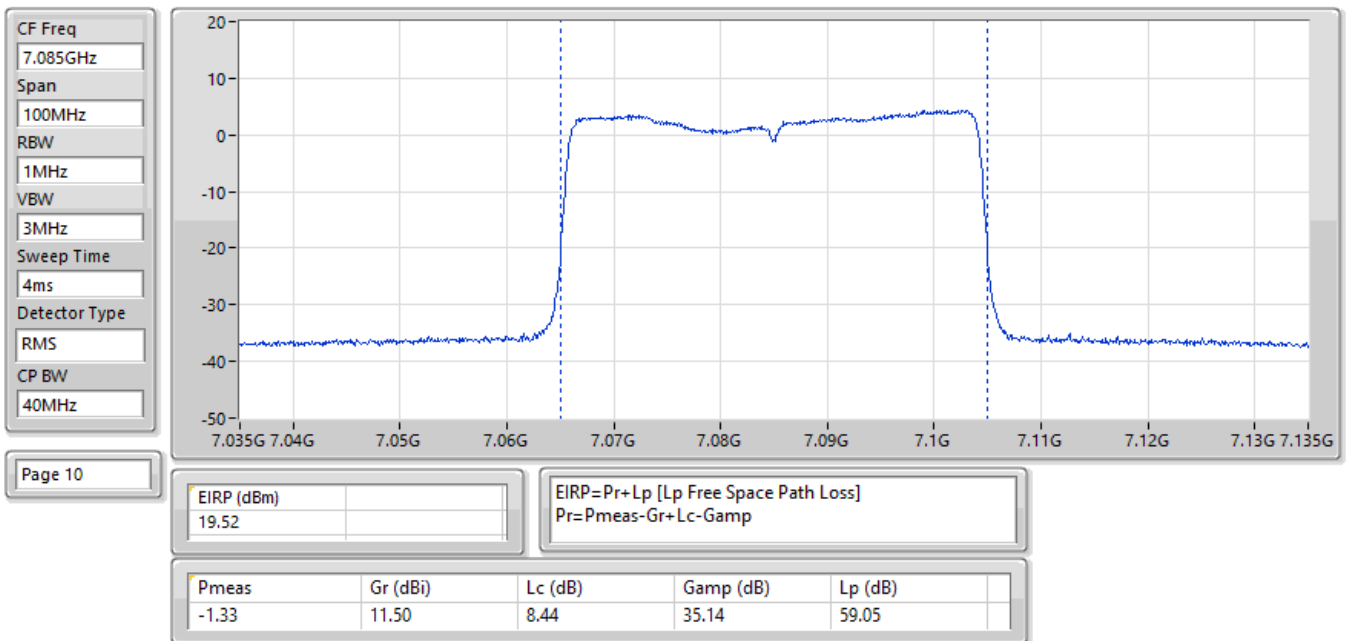


03/03/2025

EIRP:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6625MHz;TX

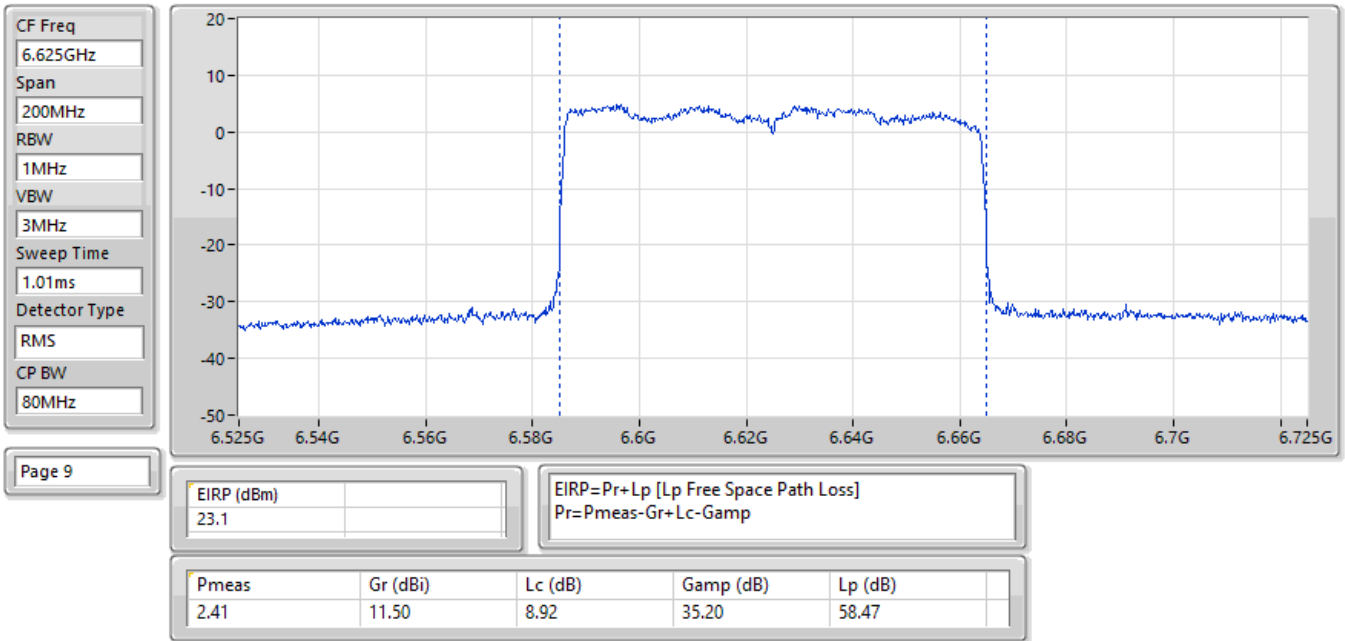


03/03/2025

EIRP:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6705MHz;TX

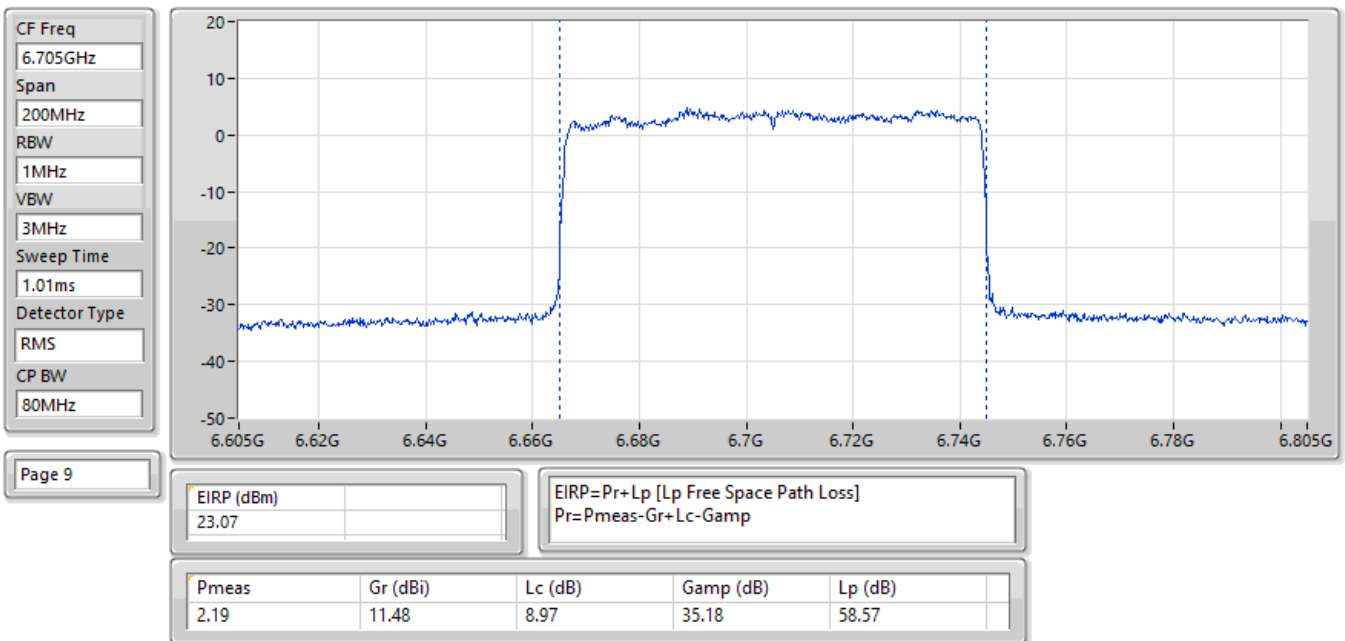


03/03/2025

EIRP:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6785MHz;TX

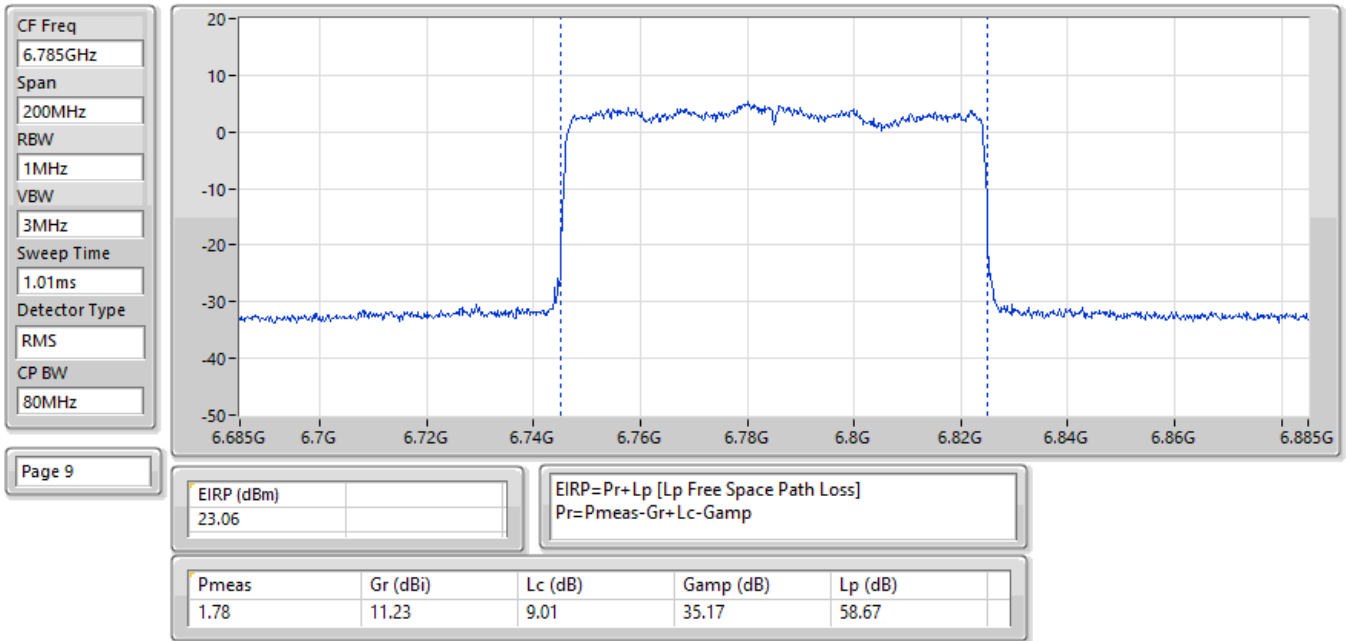


03/03/2025

EIRP:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6865MHz;TX

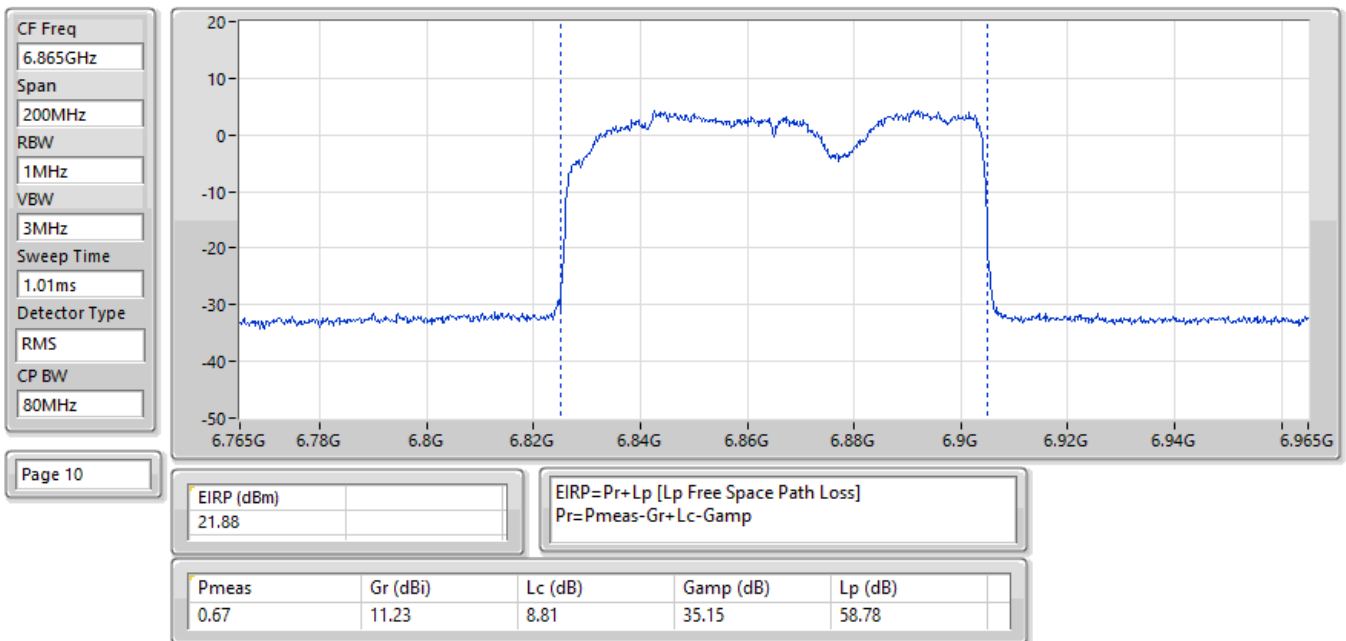


03/03/2025

EIRP:Band:7.0G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6945MHz;TX

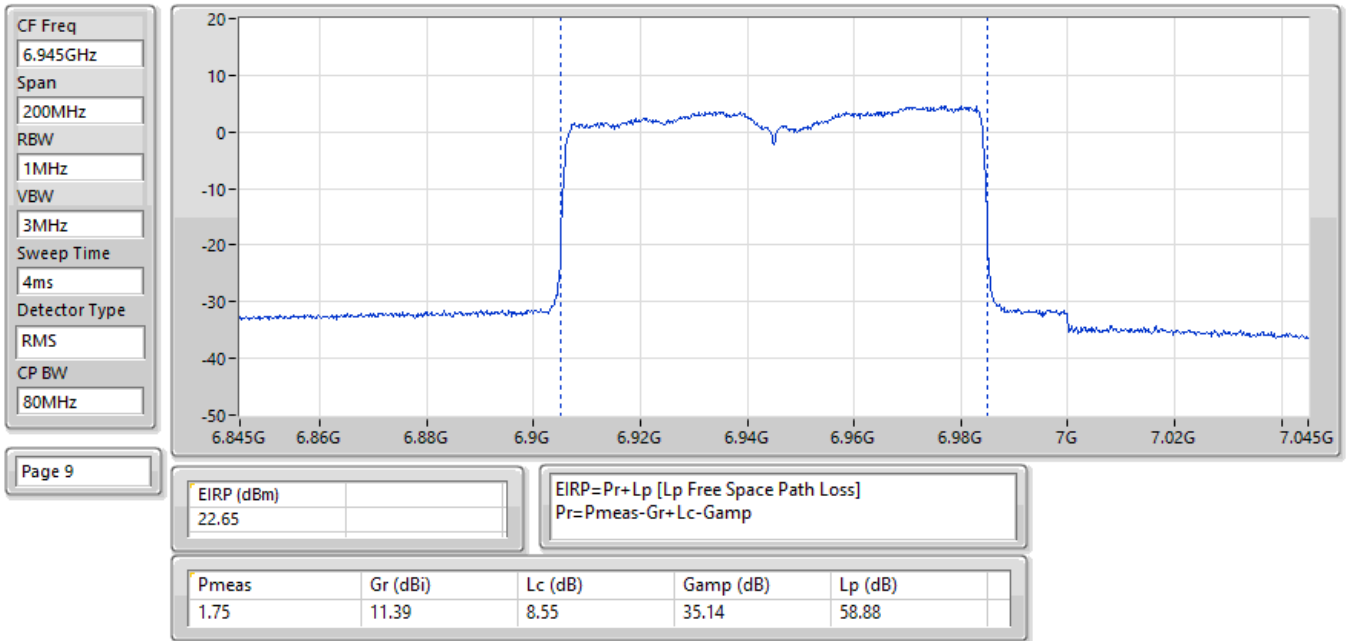


03/03/2025

EIRP:Band:7.0G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:7025MHz;TX

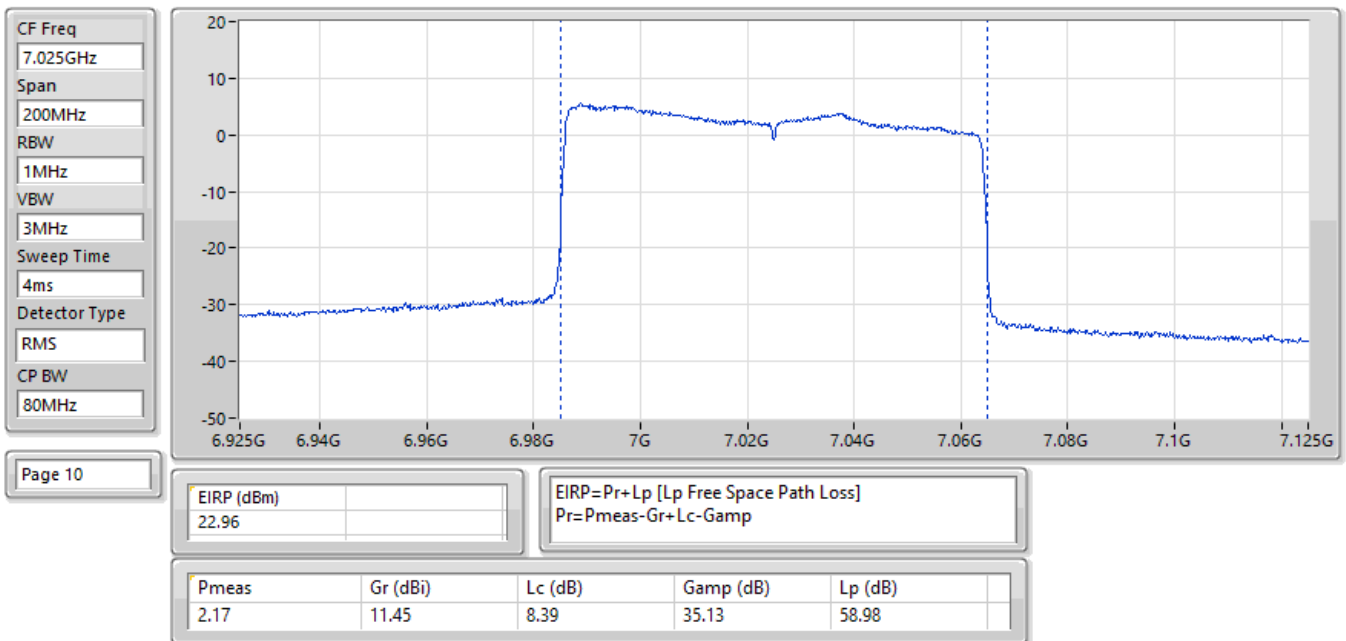


03/03/2025

EIRP;Band:6.7G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6665MHz;TX

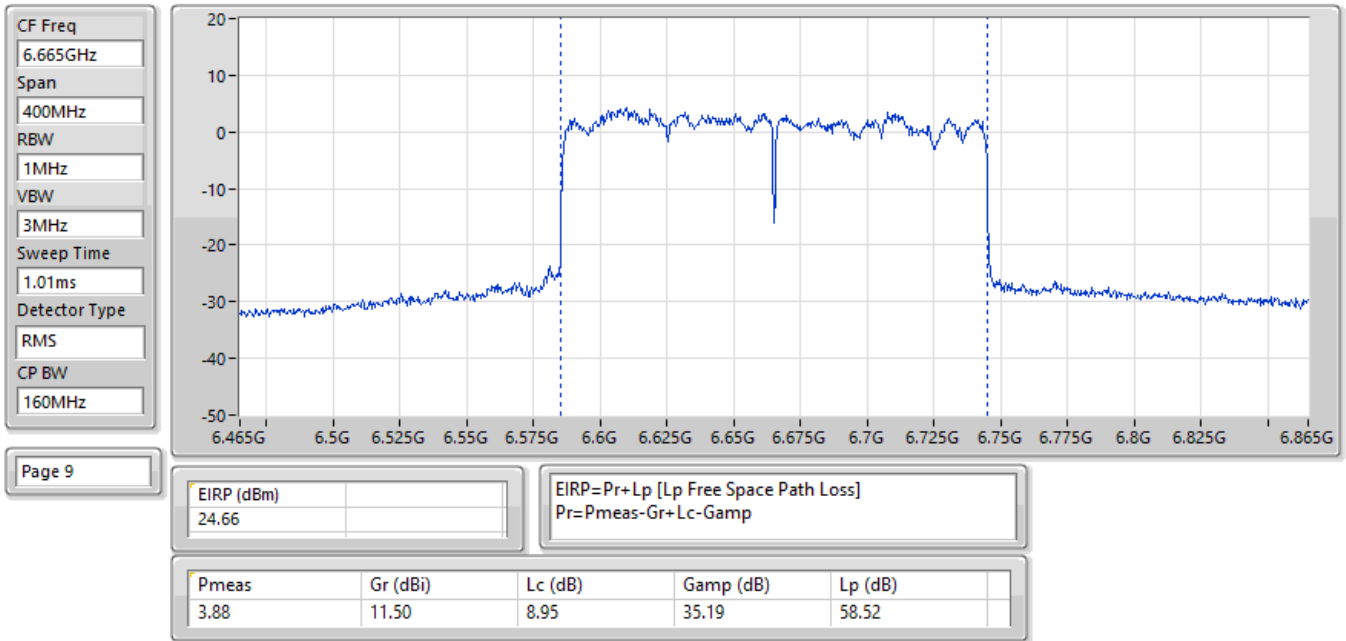


03/03/2025

EIRP;Band:6.7G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6825MHz;TX

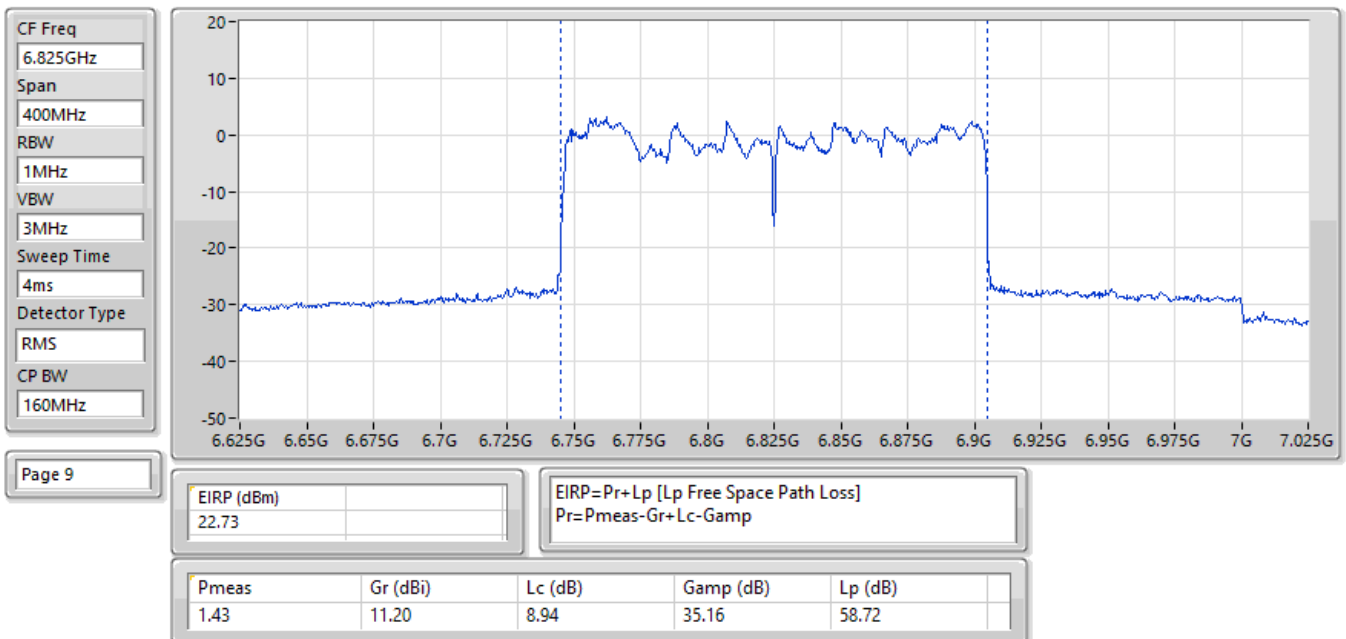


03/03/2025

EIRP;Band:7.0G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6985MHz;TX

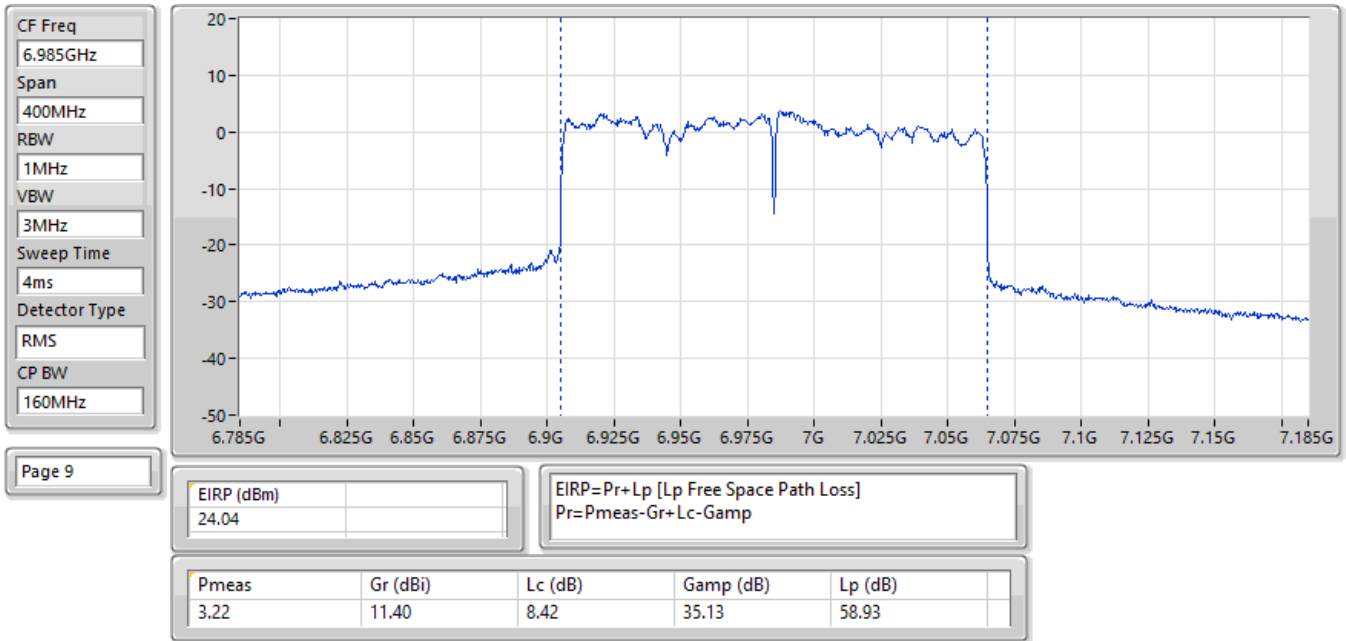


04/03/2025

EIRP;Band:6.7G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6745MHz;TX

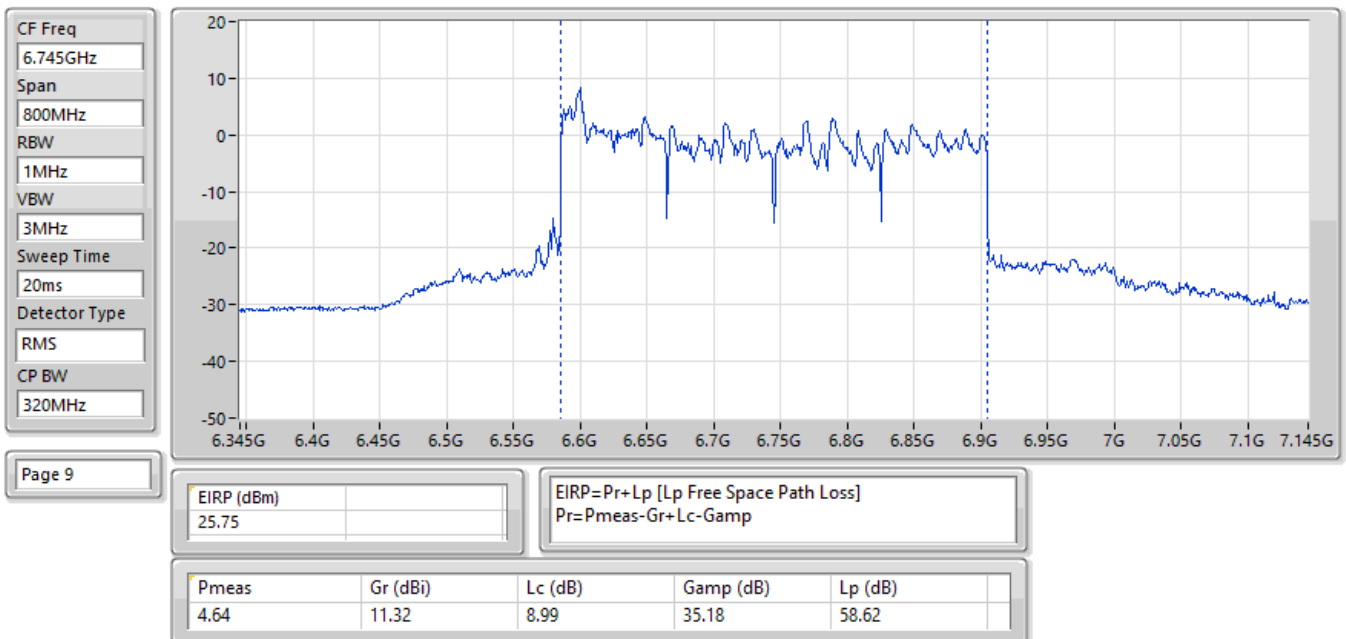

04/03/2025

EIRP;Band:6.7G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6905MHz;TX

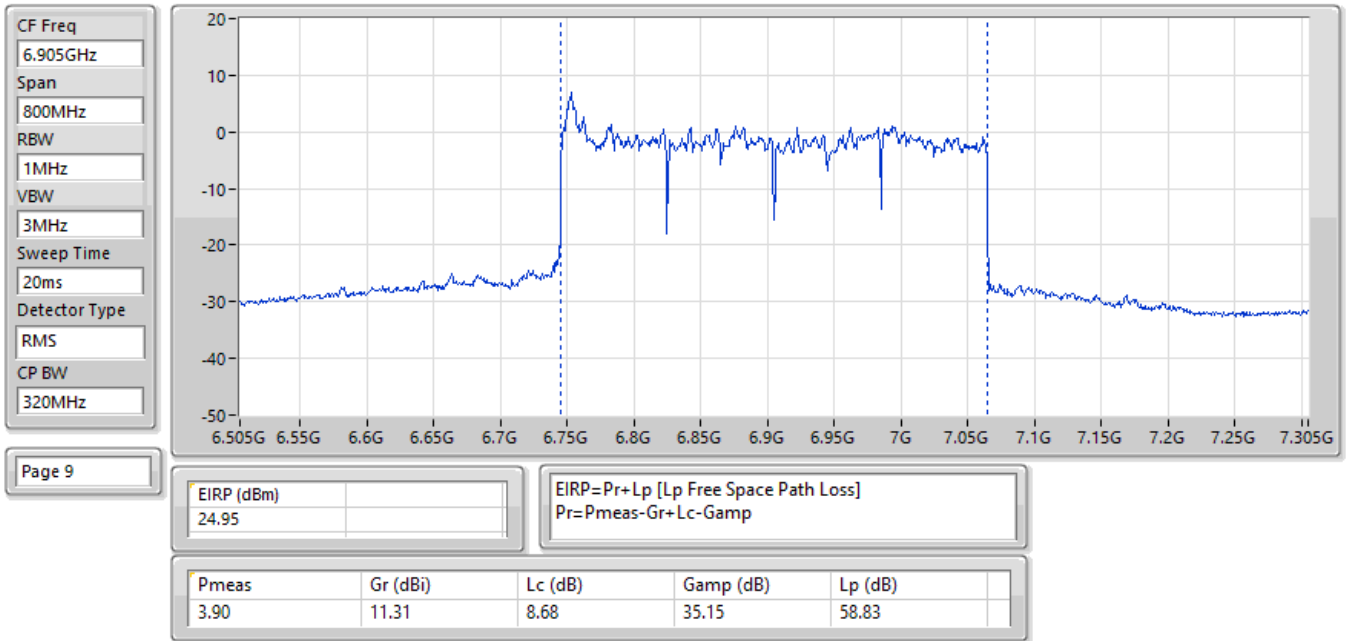



Test Mode: Mode 6

Summary

Mode	EIRP (dBm)	EIRP (W)
6.525-6.875GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	26.90	0.48978
802.11be EHT20-BF_Nss1,(MCS0)_4TX	28.03	0.63533
802.11be EHT40_Nss1,(MCS0)_4TX	26.51	0.44771
802.11be EHT40-BF_Nss1,(MCS0)_4TX	30.26	1.06170
802.11be EHT80_Nss1,(MCS0)_4TX	26.96	0.49659
802.11be EHT80-BF_Nss1,(MCS0)_4TX	29.42	0.87498
802.11be EHT160_Nss1,(MCS0)_4TX	26.88	0.48753
802.11be EHT160-BF_Nss1,(MCS0)_4TX	29.05	0.80353

Result

Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-
6535MHz	Pass	23.00	36.00
6695MHz	Pass	26.82	36.00
6855MHz	Pass	26.90	36.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-
6565MHz	Pass	24.84	36.00
6685MHz	Pass	26.24	36.00
6845MHz	Pass	26.51	36.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-
6625MHz	Pass	26.04	36.00
6705MHz	Pass	26.69	36.00
6785MHz	Pass	26.96	36.00
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-
6665MHz	Pass	26.88	36.00
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-
6535MHz	Pass	25.76	36.00
6695MHz	Pass	27.22	36.00
6855MHz	Pass	28.03	36.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-
6565MHz	Pass	26.71	36.00
6685MHz	Pass	26.83	36.00
6845MHz	Pass	30.26	36.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-
6625MHz	Pass	26.75	36.00
6705MHz	Pass	26.46	36.00
6785MHz	Pass	29.42	36.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-
6665MHz	Pass	29.05	36.00

DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.

15/03/2025

EIRP;Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6535MHz;TX

CF Freq
6.535GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
20MHz

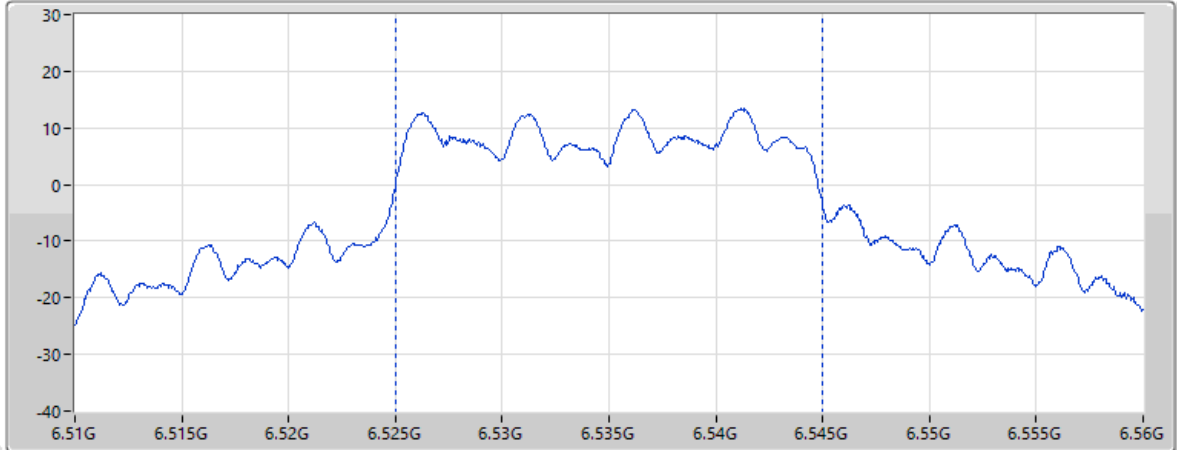

Page 10

EIRP (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
23				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-0.12	10.73	7.91	32.41	58.35

15/03/2025

EIRP;Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6695MHz;TX

CF Freq
6.695GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
20MHz

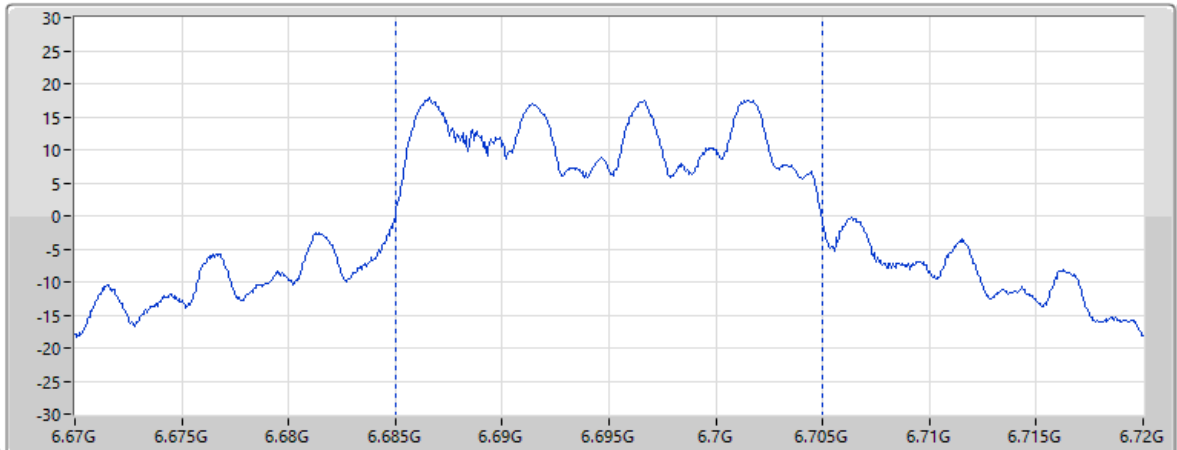


Page 10

EIRP (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
26.82				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
3.42	10.60	7.96	32.52	58.56


15/03/2025

EIRP:Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6855MHz;TX

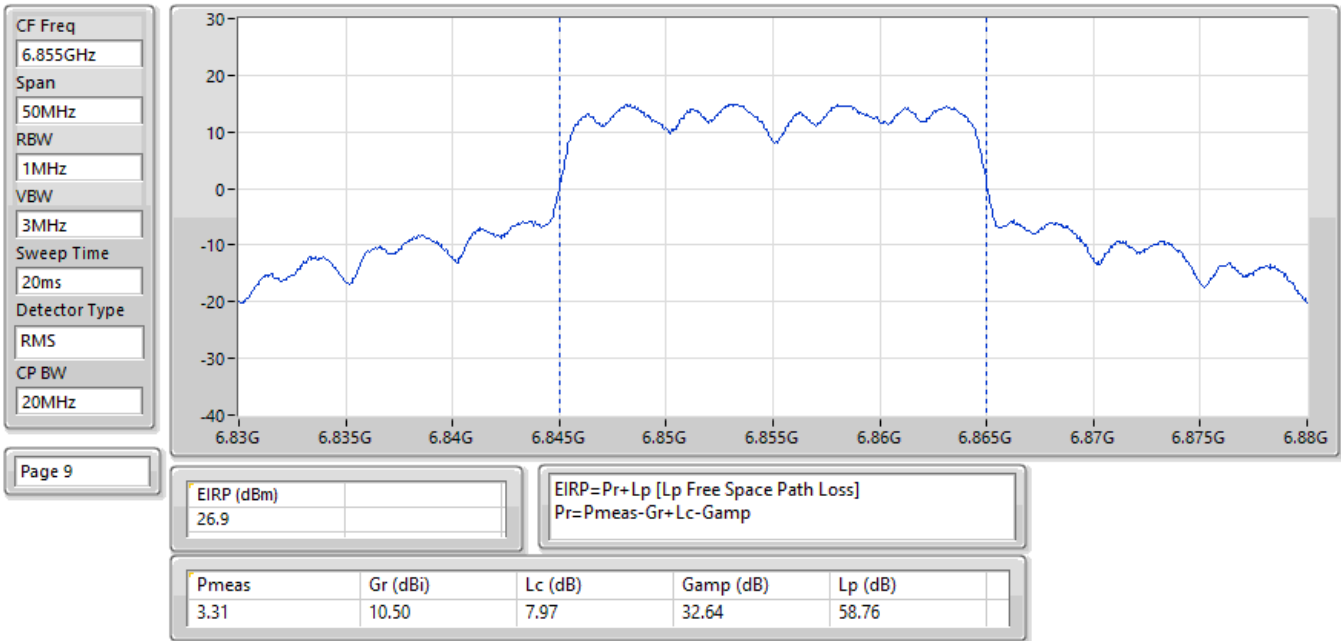


15/03/2025

EIRP:Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6565MHz;TX

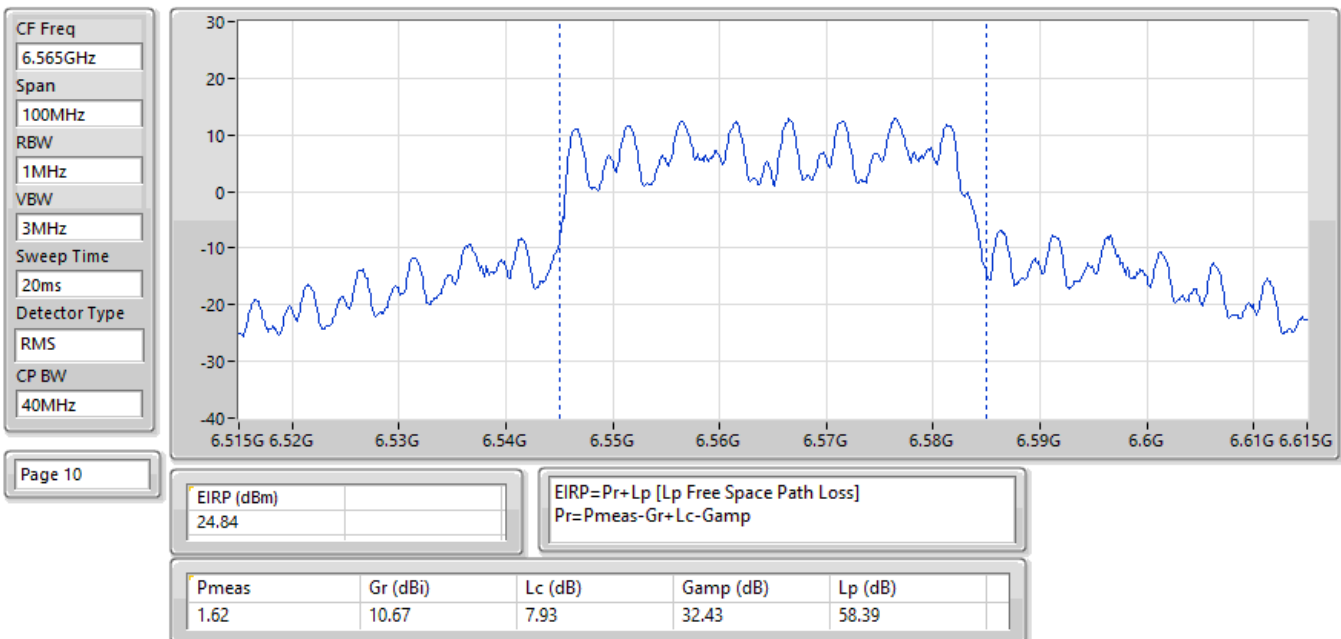


15/03/2025

EIRP:Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6685MHz;TX

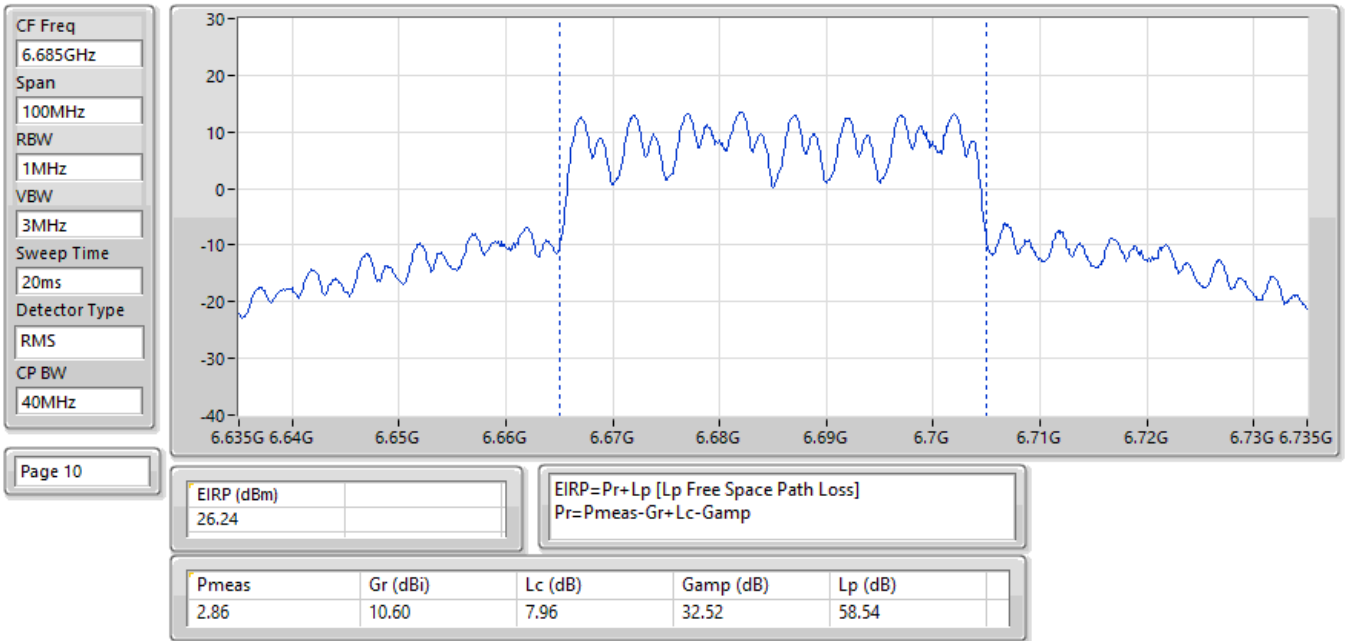


15/03/2025

EIRP:Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6845MHz;TX

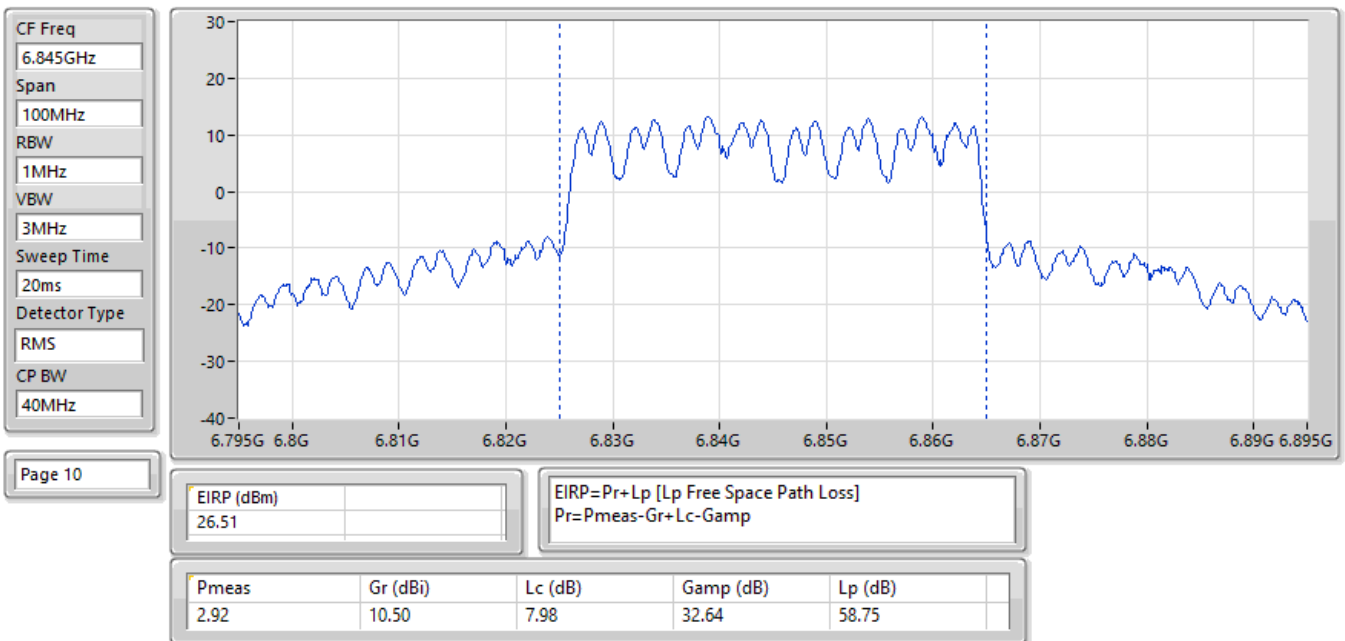


15/03/2025

EIRP:Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6625MHz;TX

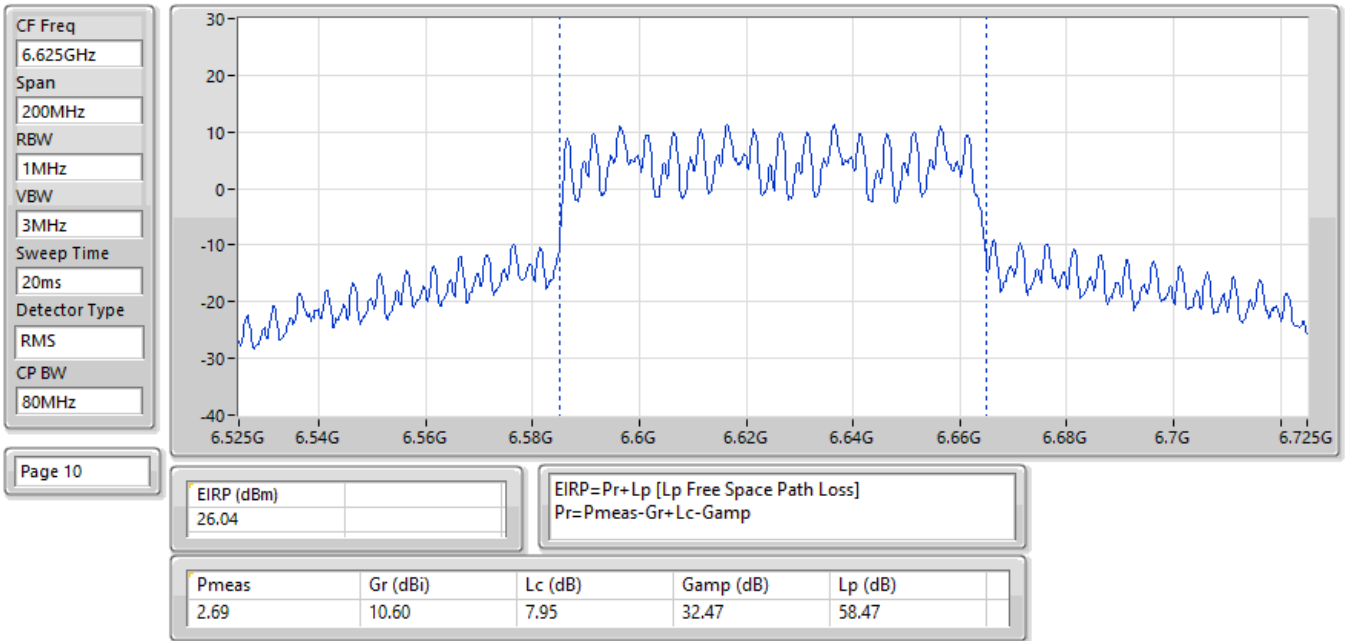

15/03/2025


EIRP:Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6705MHz;TX

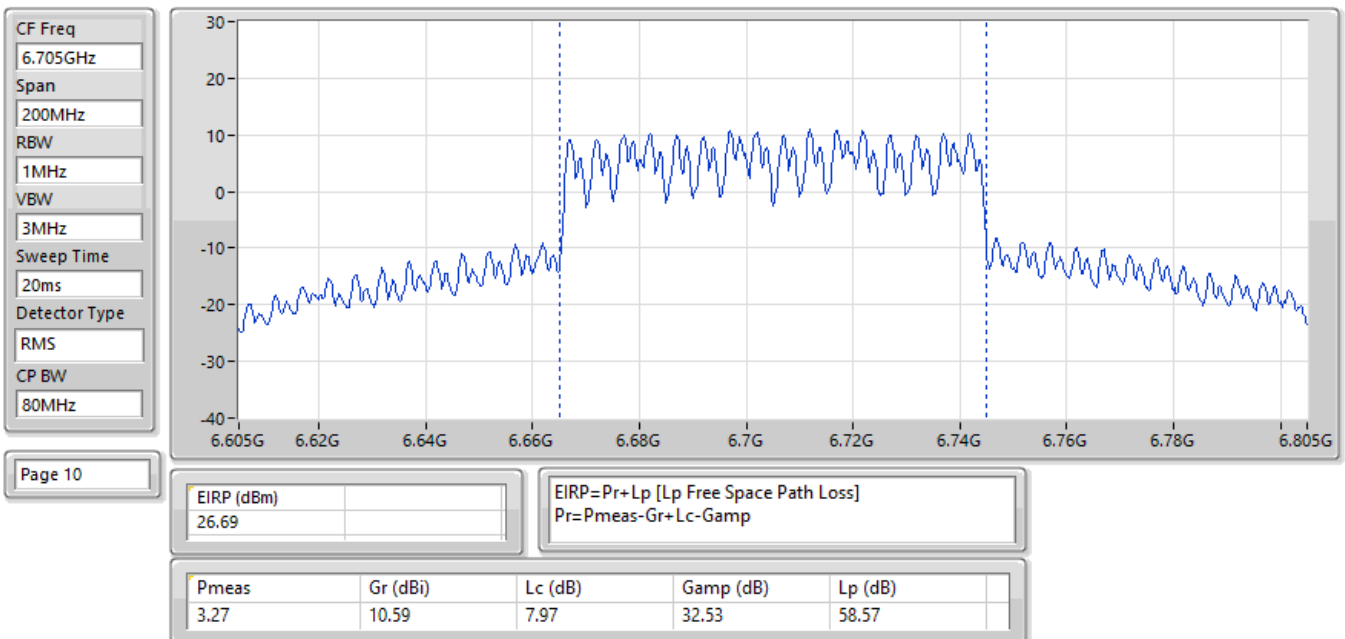

15/03/2025

EIRP;Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6785MHz;TX

CF Freq
6.785GHz
Span
200MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
80MHz

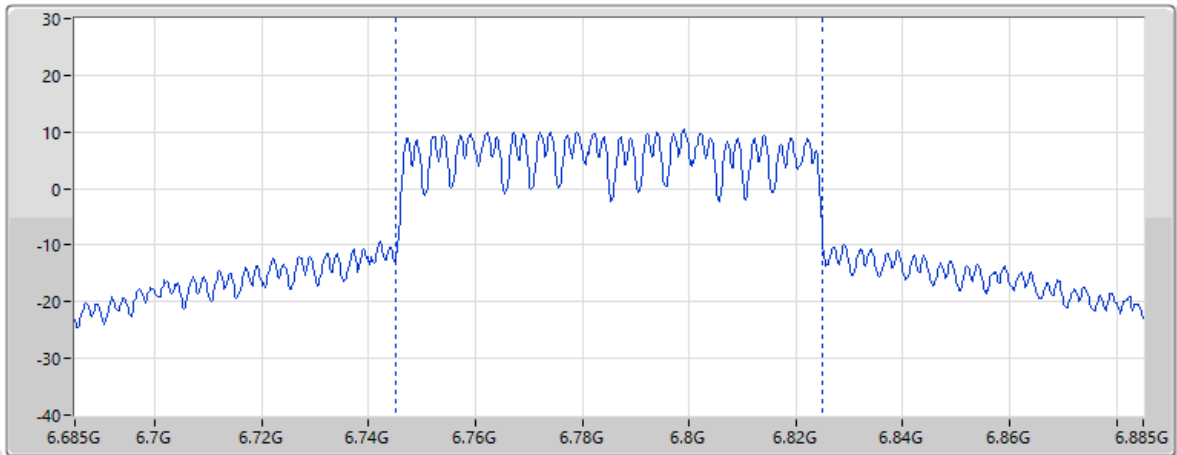

Page 10

EIRP (dBm)
26.96


EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
3.40	10.50	7.98	32.59	58.67

18/03/2025

EIRP;Band:6.7G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6665MHz;TX

CF Freq
6.665GHz
Span
400MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
160MHz

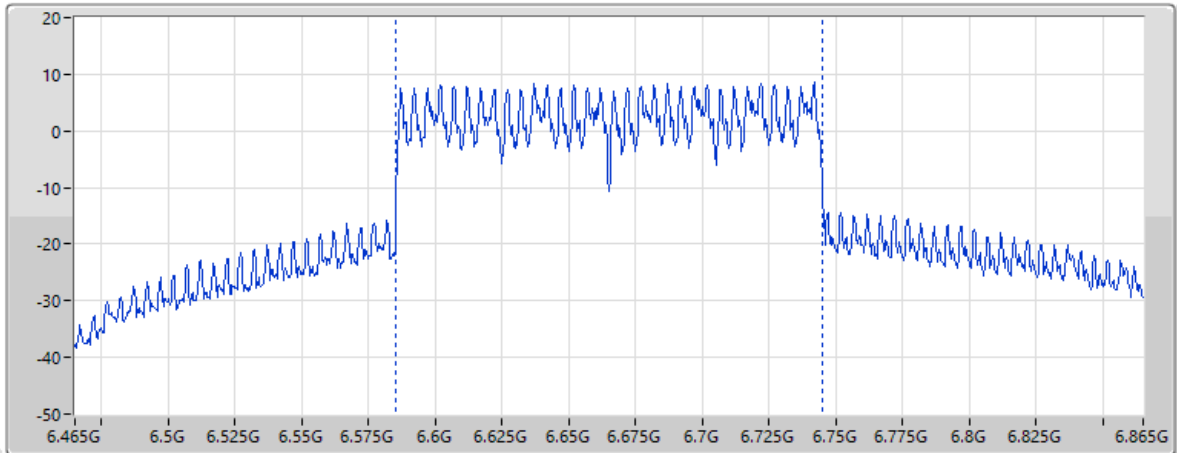

Page 10


EIRP (dBm)
26.88

EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
3.50	10.60	7.96	32.50	58.52


15/03/2025

EIRP:Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6535MHz;TX

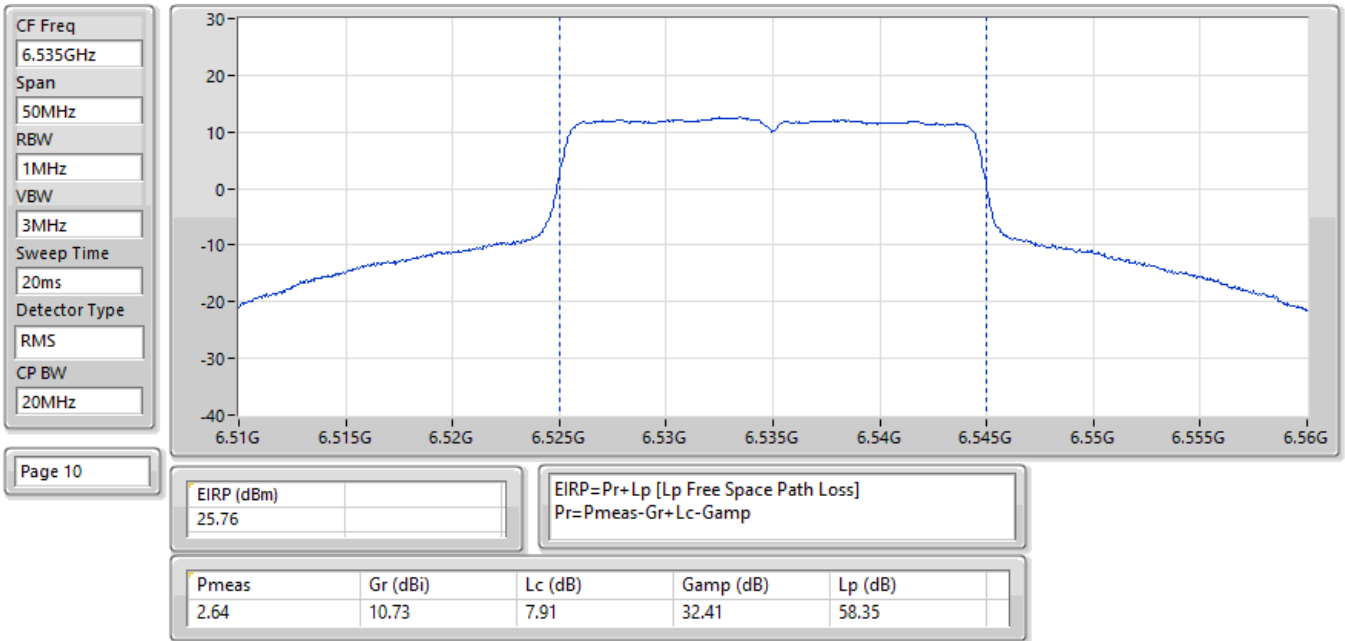


18/03/2025

EIRP:Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6695MHz;TX

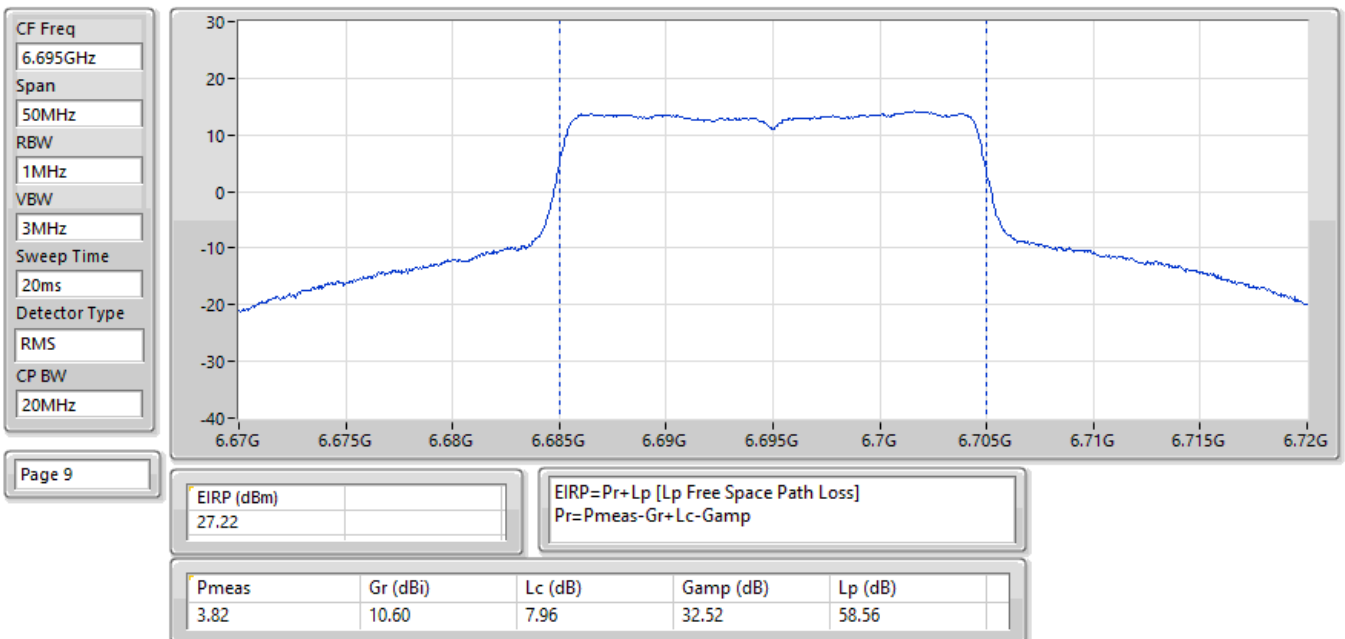


18/03/2025

EIRP:Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6855MHz;TX

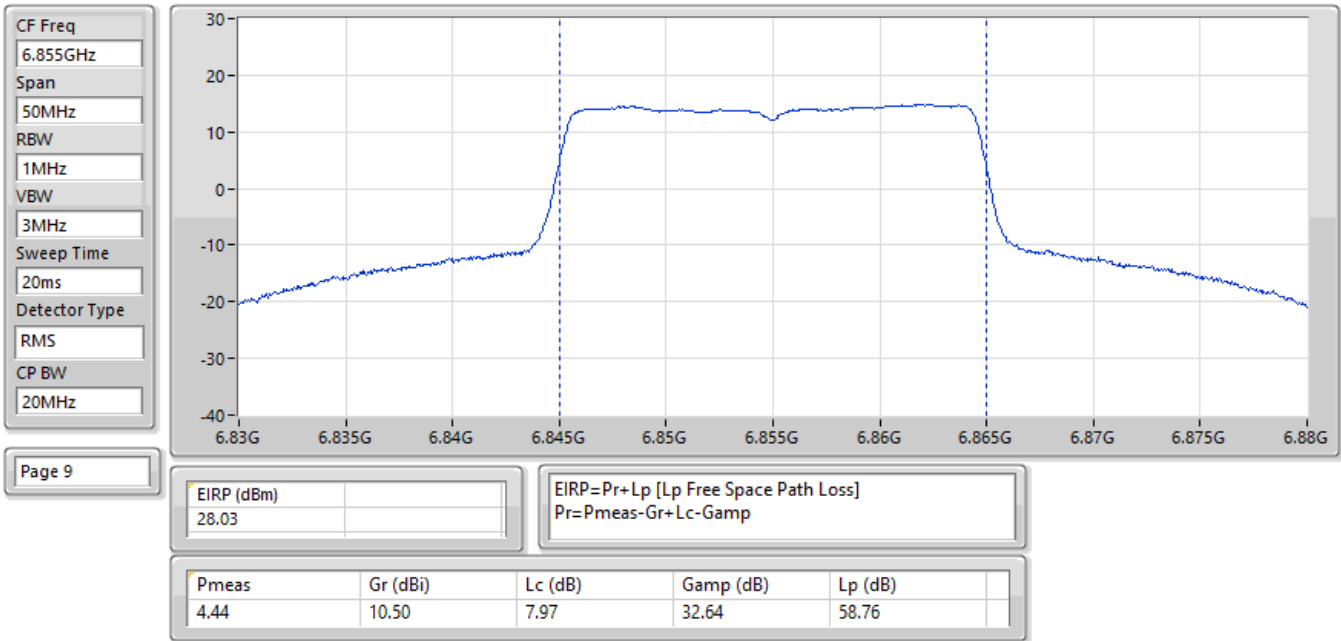


15/03/2025

EIRP:Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6565MHz;TX

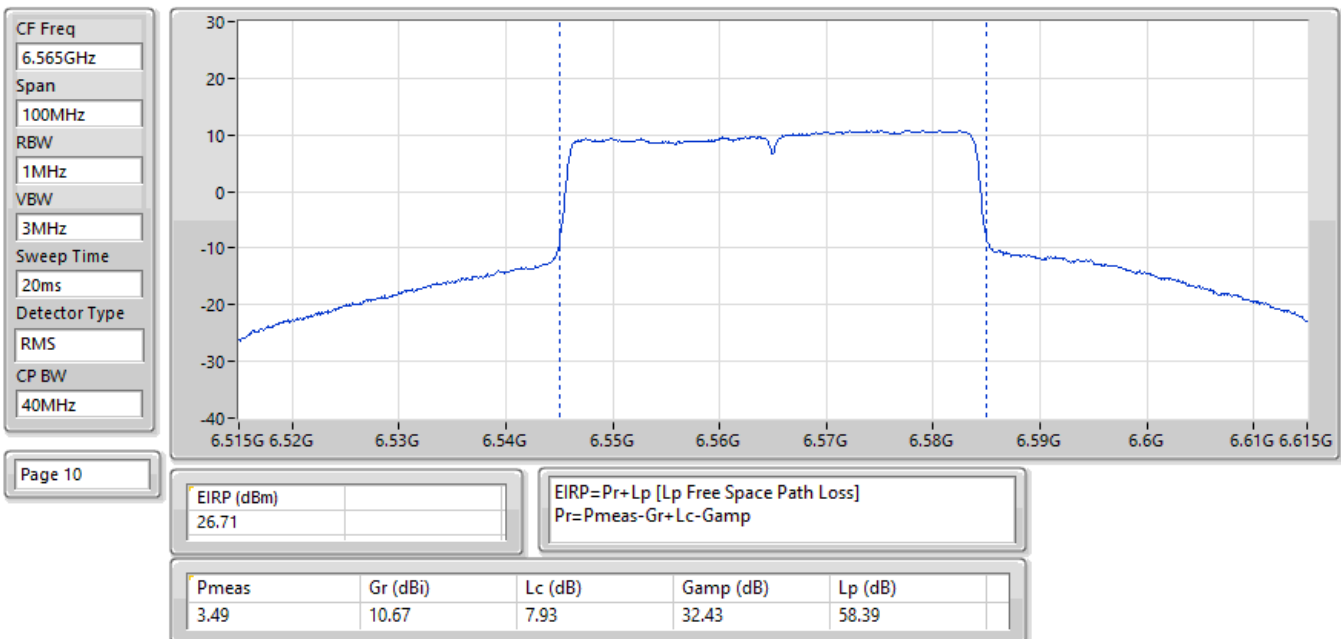


15/03/2025

EIRP:Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6685MHz;TX

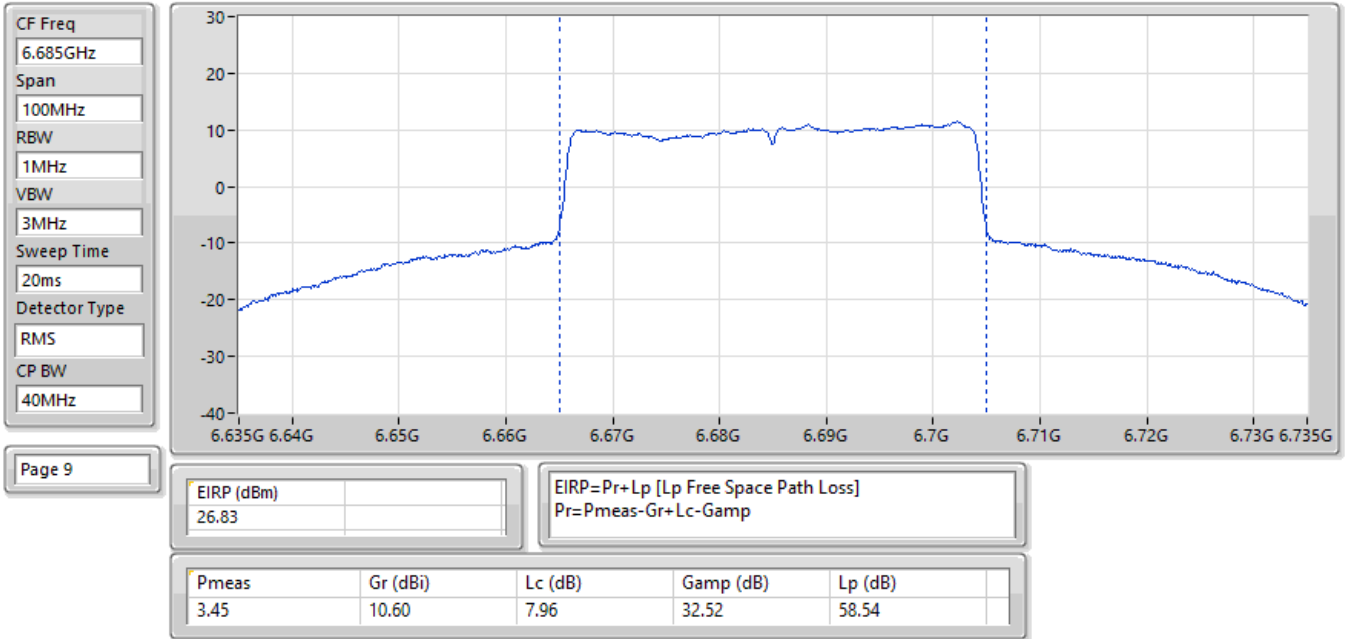

18/03/2025

EIRP:Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6845MHz;TX

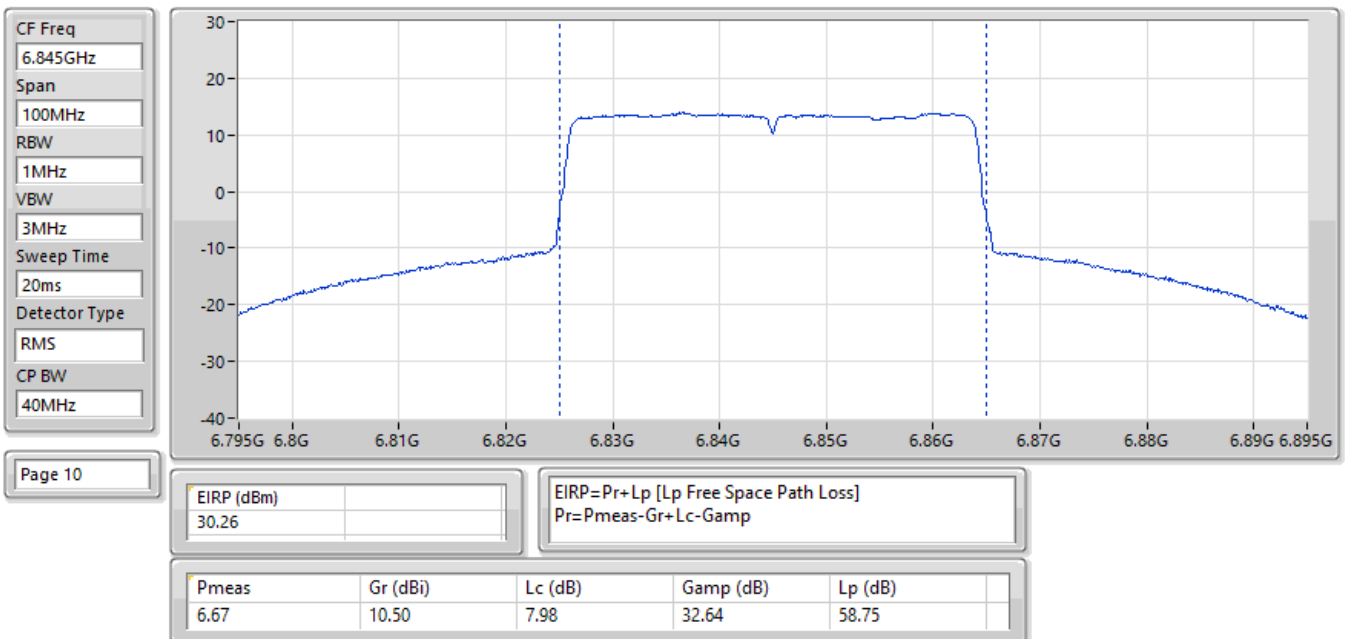

15/03/2025

EIRP:Band:6.7G;be80,8F;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6625MHz;TX

CF Freq
6.625GHz

Span
200MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
80MHz

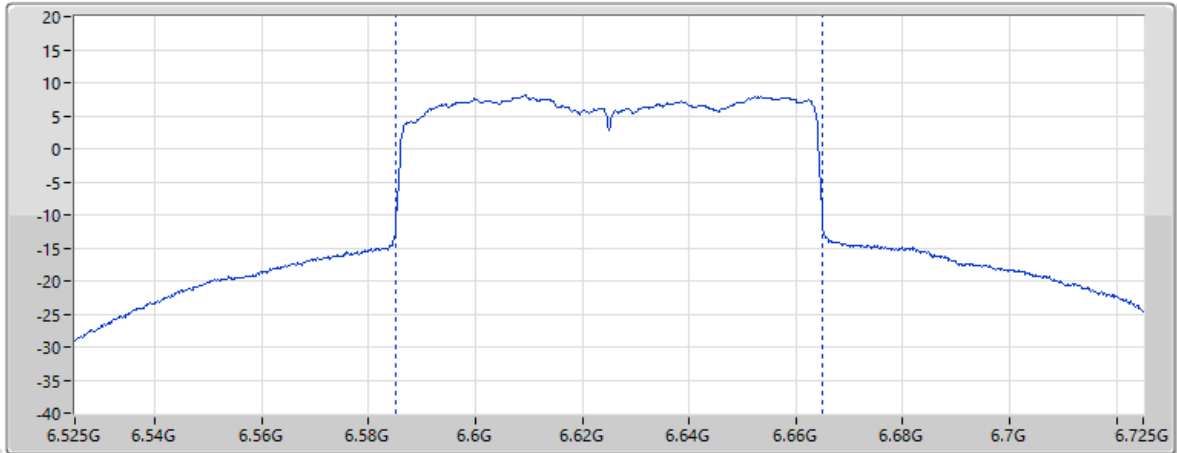

Page 9

EIRP (dBm)
26.75

EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
3.40	10.60	7.95	32.47	58.47

15/03/2025

EIRP:Band:6.7G;be80,8F;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6705MHz;TX

CF Freq
6.705GHz

Span
200MHz


RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

CP BW
80MHz

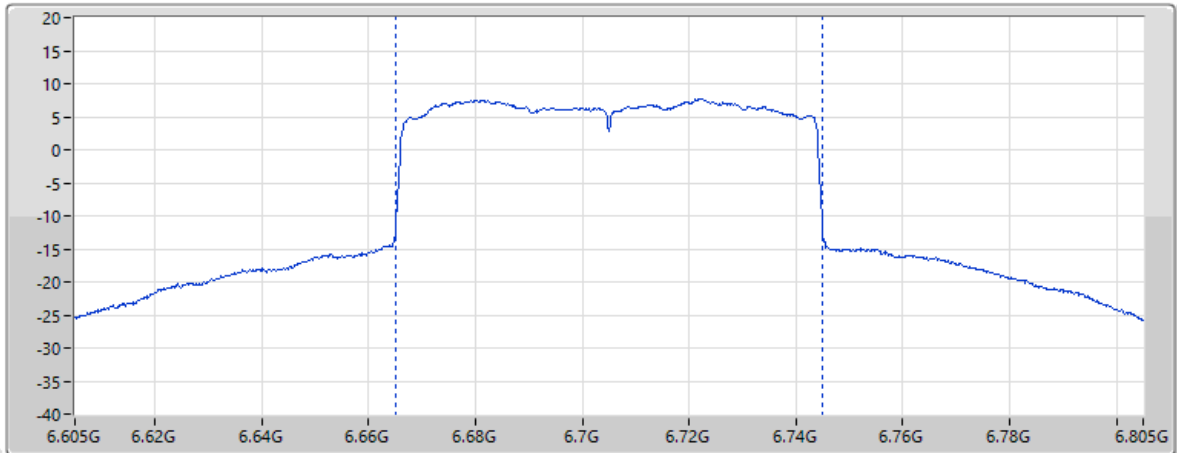

Page 9

EIRP (dBm)
26.46


EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
3.04	10.59	7.97	32.53	58.57

15/03/2025

EIRP:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6785MHz;TX

CF Freq
6.785GHz
Span
200MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
80MHz

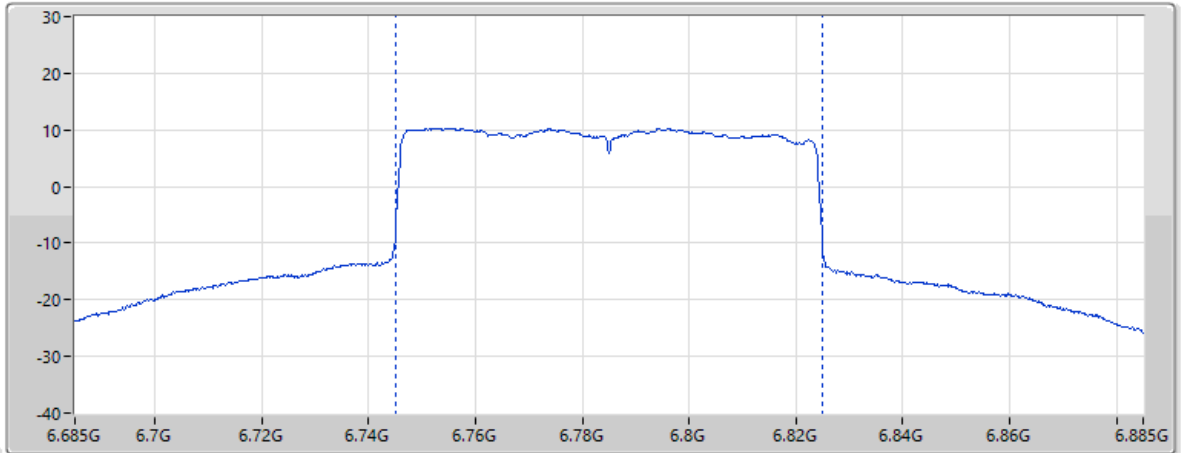


Page 9

EIRP (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
29.42				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
5.86	10.50	7.98	32.59	58.67

15/03/2025

EIRP:Band:6.7G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6665MHz;TX

CF Freq
6.665GHz
Span
400MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
160MHz

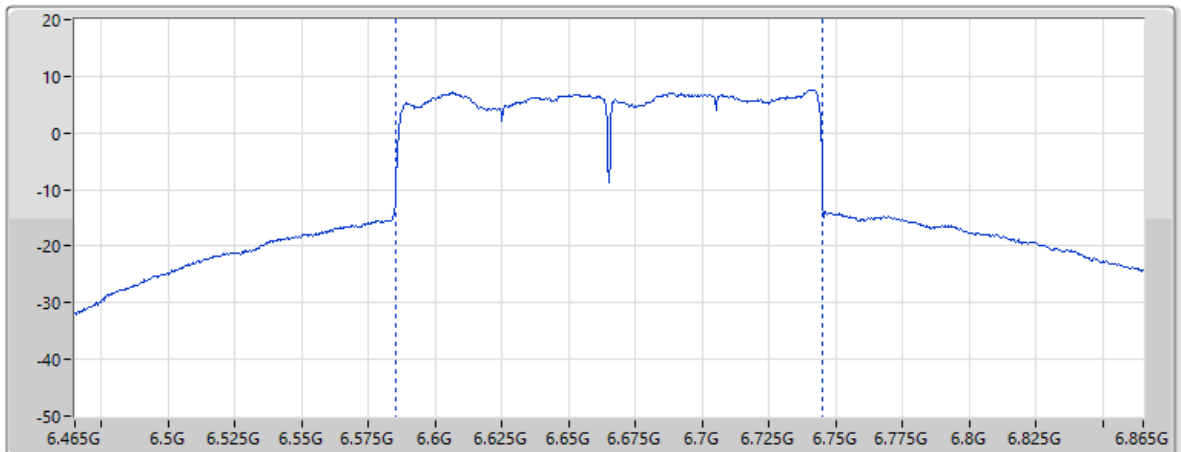

Page 9

EIRP (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
29.05				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
5.67	10.60	7.96	32.50	58.52

Test Mode: Mode 7

Summary


Mode	EIRP	EIRP
	(dBm)	(W)
5.925-6.425GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	13.18	0.02080
802.11be EHT20_Nss1,(MCS0)_4TX	15.71	0.03724
802.11be EHT20_Nss1,(MCS0)_4TX	14.65	0.02917
802.11be EHT40_Nss1,(MCS0)_4TX	17.12	0.05152
802.11be EHT40_Nss1,(MCS0)_4TX	18.43	0.06966
802.11be EHT40_Nss1,(MCS0)_4TX	16.66	0.04634
802.11be EHT80_Nss1,(MCS0)_4TX	19.76	0.09462
802.11be EHT80_Nss1,(MCS0)_4TX	19.58	0.09078
802.11be EHT80_Nss1,(MCS0)_4TX	20.49	0.11194
802.11be EHT160_Nss1,(MCS0)_4TX	22.31	0.17022
802.11be EHT160_Nss1,(MCS0)_4TX	22.81	0.19099
802.11be EHT160_Nss1,(MCS0)_4TX	23.12	0.20512
802.11be EHT320_Nss1,(MCS0)_4TX	26.83	0.48195
802.11be EHT320_Nss1,(MCS0)_4TX	26.74	0.47206
6.425-6.525GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	15.13	0.03258
802.11be EHT20_Nss1,(MCS0)_4TX	14.86	0.03062
802.11be EHT20_Nss1,(MCS0)_4TX	14.84	0.03048
802.11be EHT40_Nss1,(MCS0)_4TX	19.16	0.08241
802.11be EHT40_Nss1,(MCS0)_4TX	18.54	0.07145
802.11be EHT40_Nss1,(MCS0)_4TX	18.25	0.06683
802.11be EHT80_Nss1,(MCS0)_4TX	21.03	0.12677
802.11be EHT80_Nss1,(MCS0)_4TX	21.07	0.12794
802.11be EHT160_Nss1,(MCS0)_4TX	24.07	0.25527
802.11be EHT320_Nss1,(MCS0)_4TX	27.08	0.51050
6.525-6.875GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	14.86	0.03062
802.11be EHT20_Nss1,(MCS0)_4TX	16.18	0.04150
802.11be EHT20_Nss1,(MCS0)_4TX	14.84	0.03048
802.11be EHT40_Nss1,(MCS0)_4TX	17.38	0.05470
802.11be EHT40_Nss1,(MCS0)_4TX	18.28	0.06730
802.11be EHT40_Nss1,(MCS0)_4TX	17.97	0.06266
802.11be EHT80_Nss1,(MCS0)_4TX	19.72	0.09376
802.11be EHT80_Nss1,(MCS0)_4TX	21.29	0.13459
802.11be EHT80_Nss1,(MCS0)_4TX	20.27	0.10641
802.11be EHT80_Nss1,(MCS0)_4TX	21.77	0.15031
802.11be EHT160_Nss1,(MCS0)_4TX	23.52	0.22491
802.11be EHT160_Nss1,(MCS0)_4TX	23.51	0.22439
802.11be EHT320_Nss1,(MCS0)_4TX	27.04	0.50582
802.11be EHT320_Nss1,(MCS0)_4TX	26.56	0.45290
6.875-7.125GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	14.57	0.02864
802.11be EHT20_Nss1,(MCS0)_4TX	16.68	0.04656
802.11be EHT20_Nss1,(MCS0)_4TX	14.85	0.03055
802.11be EHT40_Nss1,(MCS0)_4TX	19.17	0.08260
802.11be EHT40_Nss1,(MCS0)_4TX	16.38	0.04345
802.11be EHT40_Nss1,(MCS0)_4TX	18.72	0.07447
802.11be EHT80_Nss1,(MCS0)_4TX	21.61	0.14488
802.11be EHT80_Nss1,(MCS0)_4TX	21.21	0.13213
802.11be EHT160_Nss1,(MCS0)_4TX	23.49	0.22336

Result


Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-
5955MHz	Pass	13.18	30.00
6195MHz	Pass	15.71	30.00
6415MHz	Pass	14.65	30.00
6435MHz	Pass	15.13	30.00
6475MHz	Pass	14.86	30.00
6515MHz	Pass	14.84	30.00
6535MHz	Pass	14.86	30.00
6695MHz	Pass	16.18	30.00
6875MHz Straddle 6.525-6.875GHz	Pass	14.84	30.00
6895MHz	Pass	14.57	30.00
6995MHz	Pass	16.68	30.00
7095MHz	Pass	14.85	30.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-
5965MHz	Pass	17.12	30.00
6205MHz	Pass	18.43	30.00
6405MHz	Pass	16.66	30.00
6445MHz	Pass	19.16	30.00
6485MHz	Pass	18.54	30.00
6525MHz Straddle 6.425-6.525GHz	Pass	18.25	30.00
6565MHz	Pass	17.38	30.00
6685MHz	Pass	18.28	30.00
6885MHz Straddle 6.525-6.875GHz	Pass	17.97	30.00
6925MHz	Pass	19.17	30.00
7005MHz	Pass	16.38	30.00
7085MHz	Pass	18.72	30.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-
5985MHz	Pass	19.76	30.00
6225MHz	Pass	19.58	30.00
6385MHz	Pass	20.49	30.00
6465MHz	Pass	21.03	30.00
6545MHz Straddle 6.425-6.525GHz	Pass	21.07	30.00
6625MHz	Pass	19.72	30.00
6705MHz	Pass	21.29	30.00
6785MHz	Pass	20.27	30.00
6865MHz Straddle 6.525-6.875GHz	Pass	21.77	30.00
6945MHz	Pass	21.61	30.00
7025MHz	Pass	21.21	30.00
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-
6025MHz	Pass	22.31	30.00
6185MHz	Pass	22.81	30.00
6345MHz	Pass	23.12	30.00
6505MHz Straddle 6.425-6.525GHz	Pass	24.07	30.00
6665MHz	Pass	23.52	30.00
6825MHz Straddle 6.525-6.875GHz	Pass	23.51	30.00
6985MHz	Pass	23.49	30.00
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-
6105MHz	Pass	26.83	30.00
6265MHz	Pass	26.74	30.00
6585MHz Straddle 6.425-6.525GHz	Pass	27.08	30.00
6745MHz Straddle 6.525-6.875GHz	Pass	27.04	30.00
6905MHz Straddle 6.525-6.875GHz	Pass	26.56	30.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.


EIRP;Band:6.2G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:5955MHz;TX

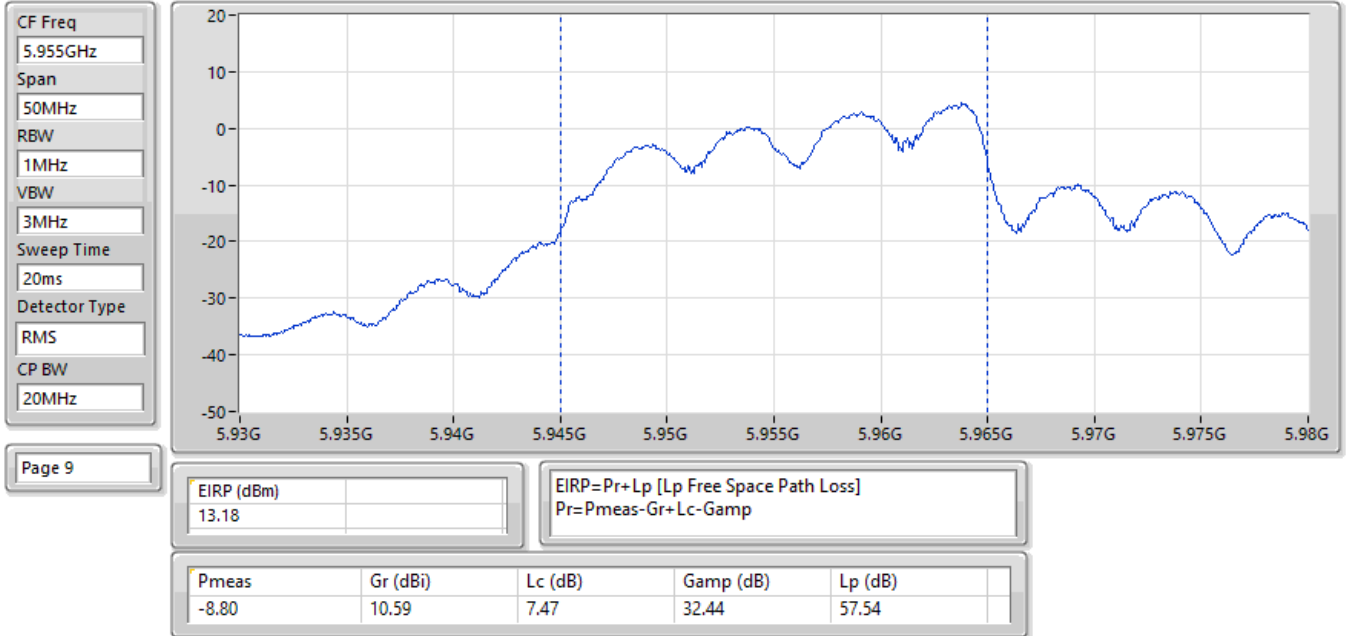


EIRP;Band:6.2G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6195MHz;TX

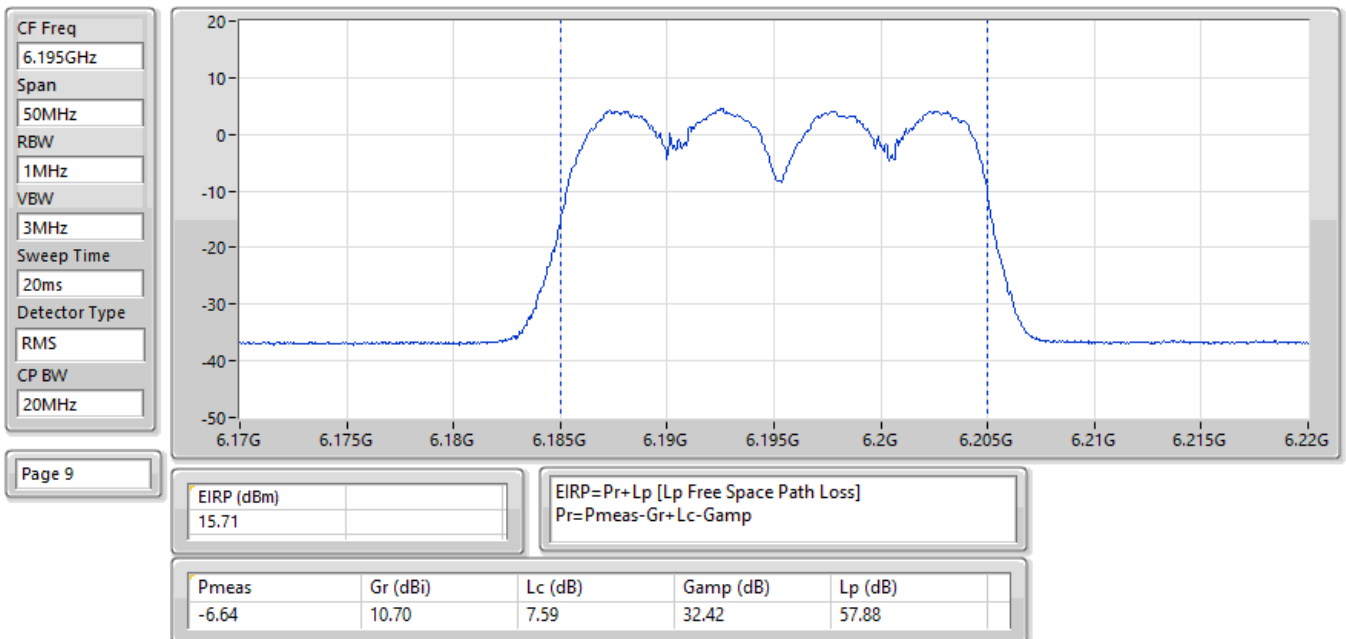


EIRP:Band:6.2G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6415MHz;TX

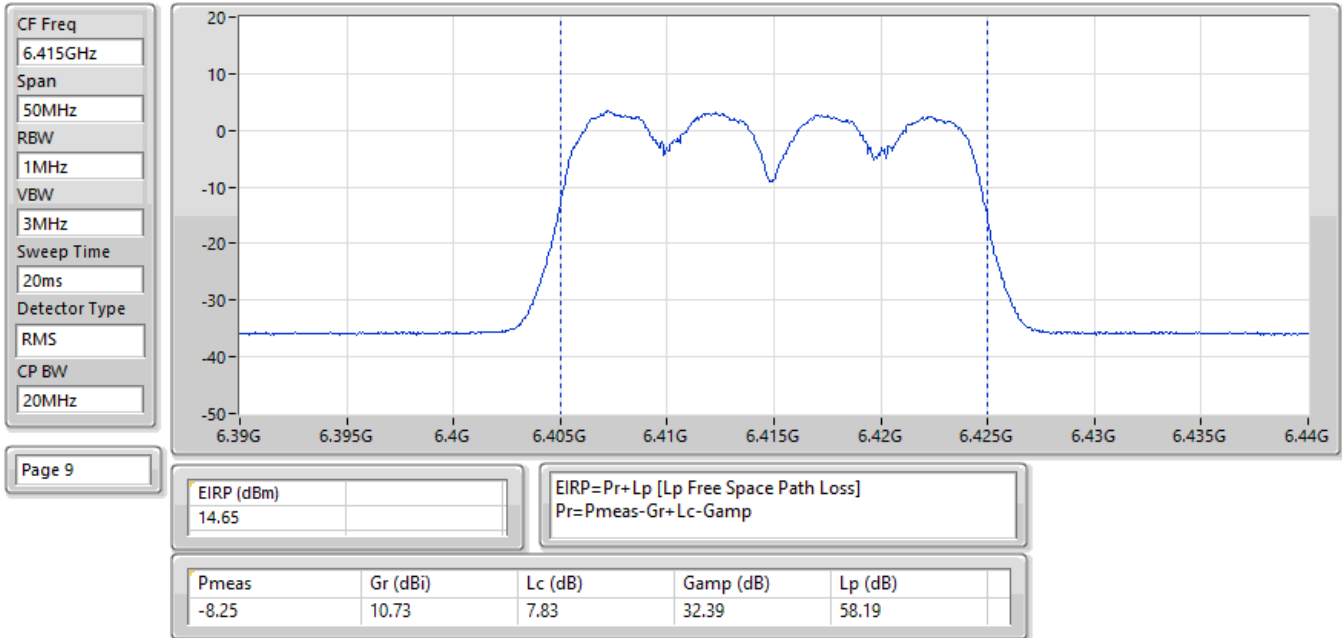


EIRP:Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:5965MHz;TX

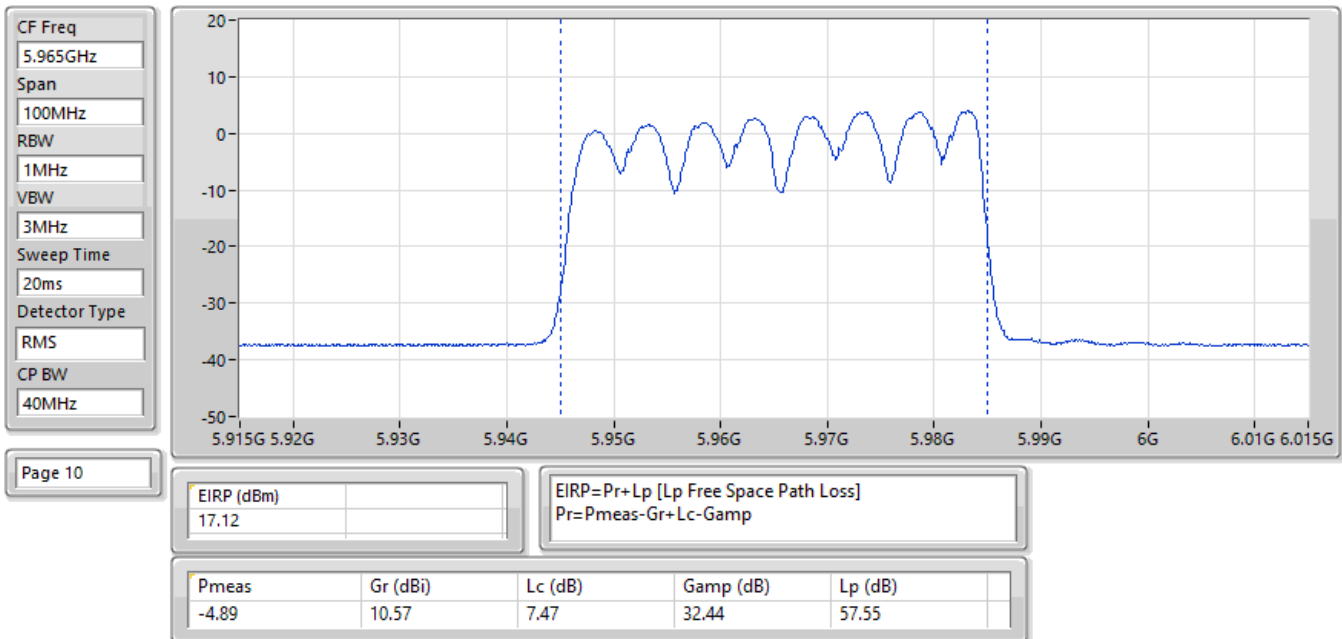


EIRP:Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6205MHz;TX

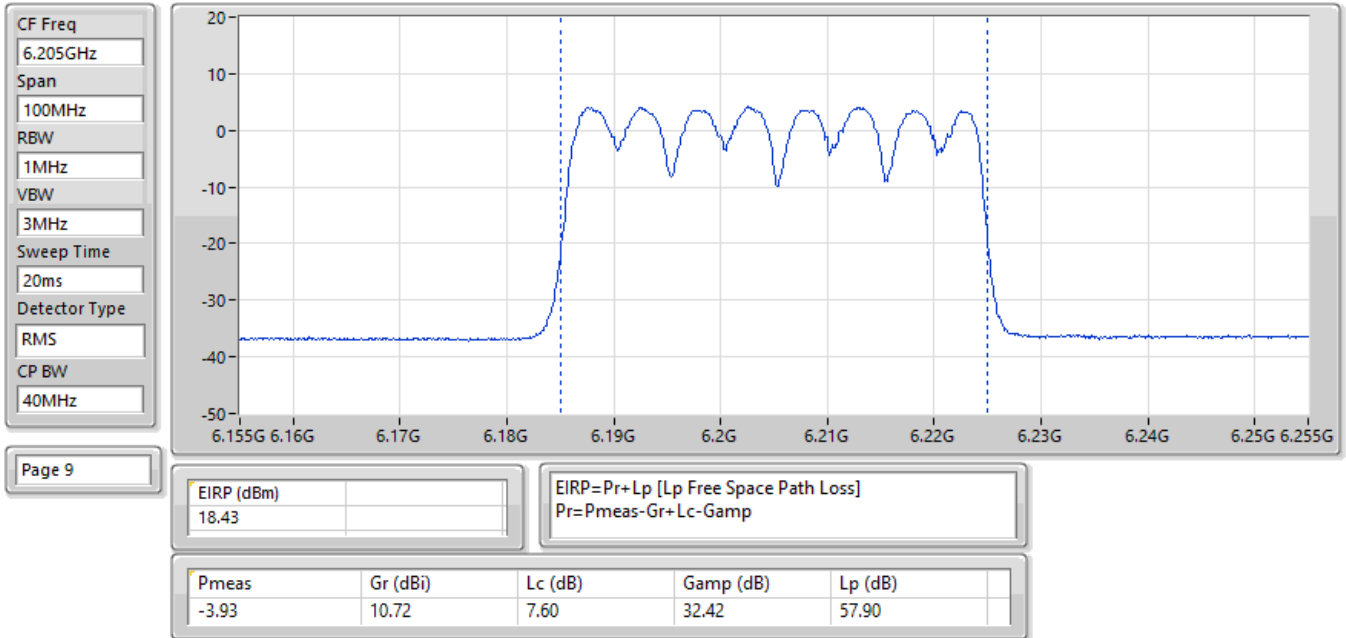


EIRP:Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6405MHz;TX

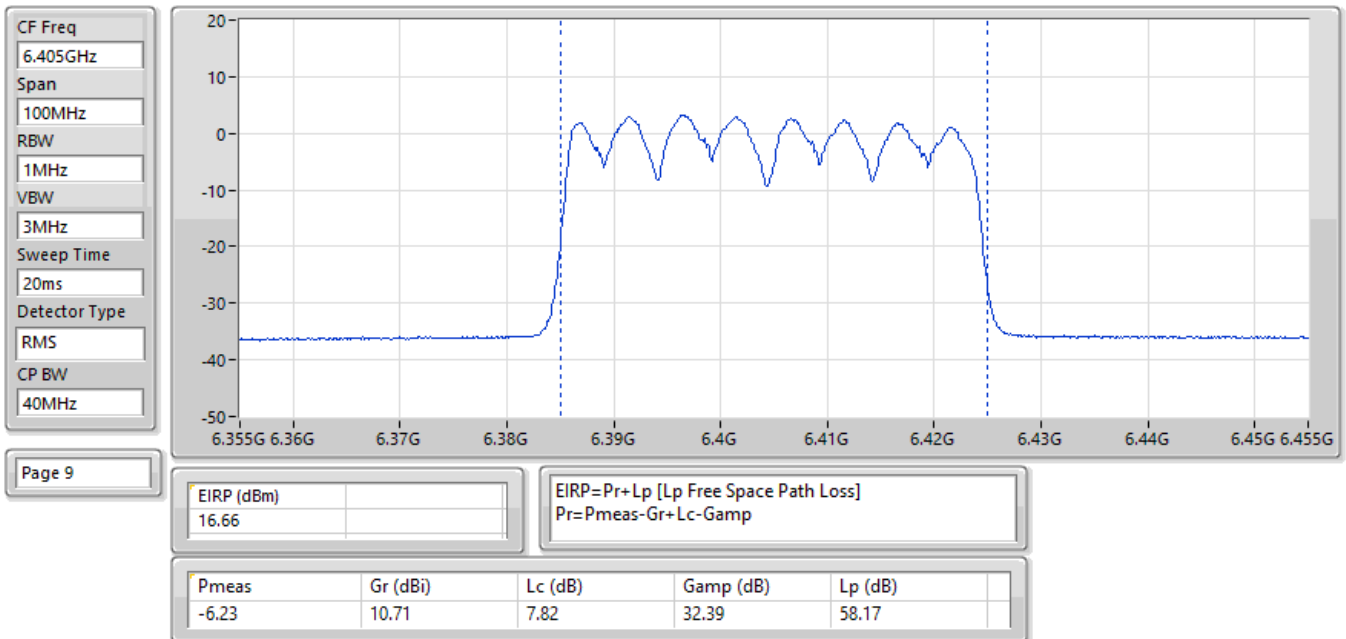


EIRP:Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:5985MHz;TX

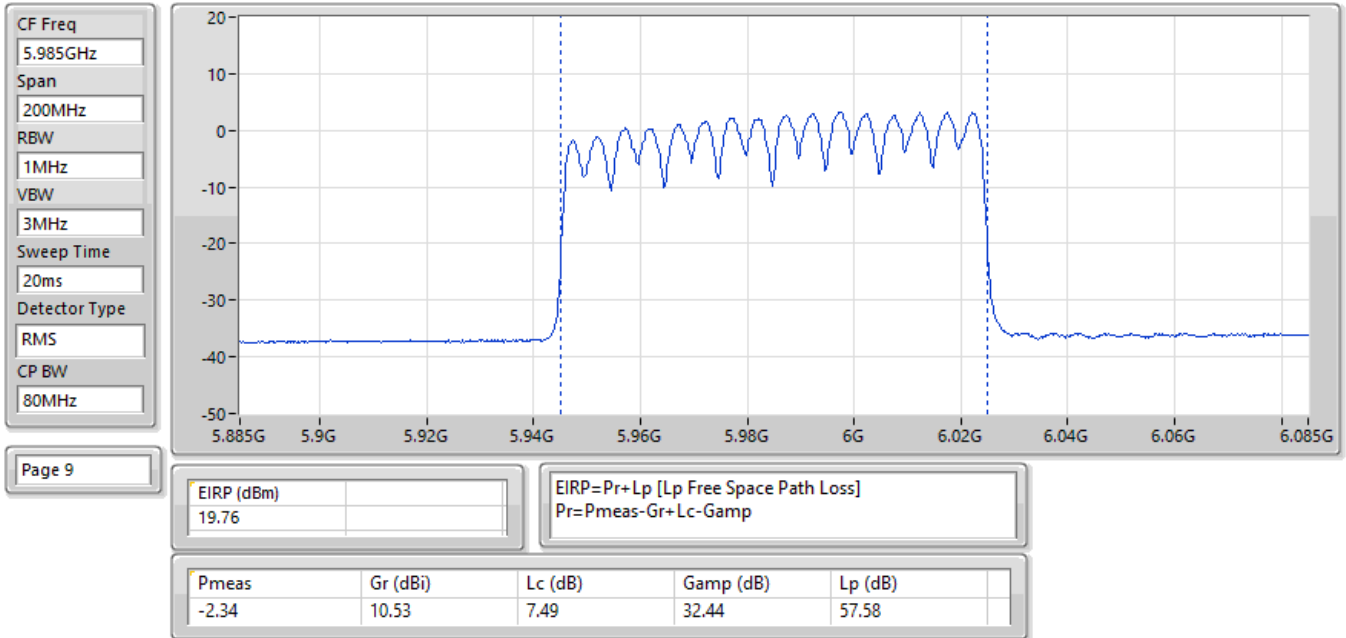


EIRP:Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6225MHz;TX

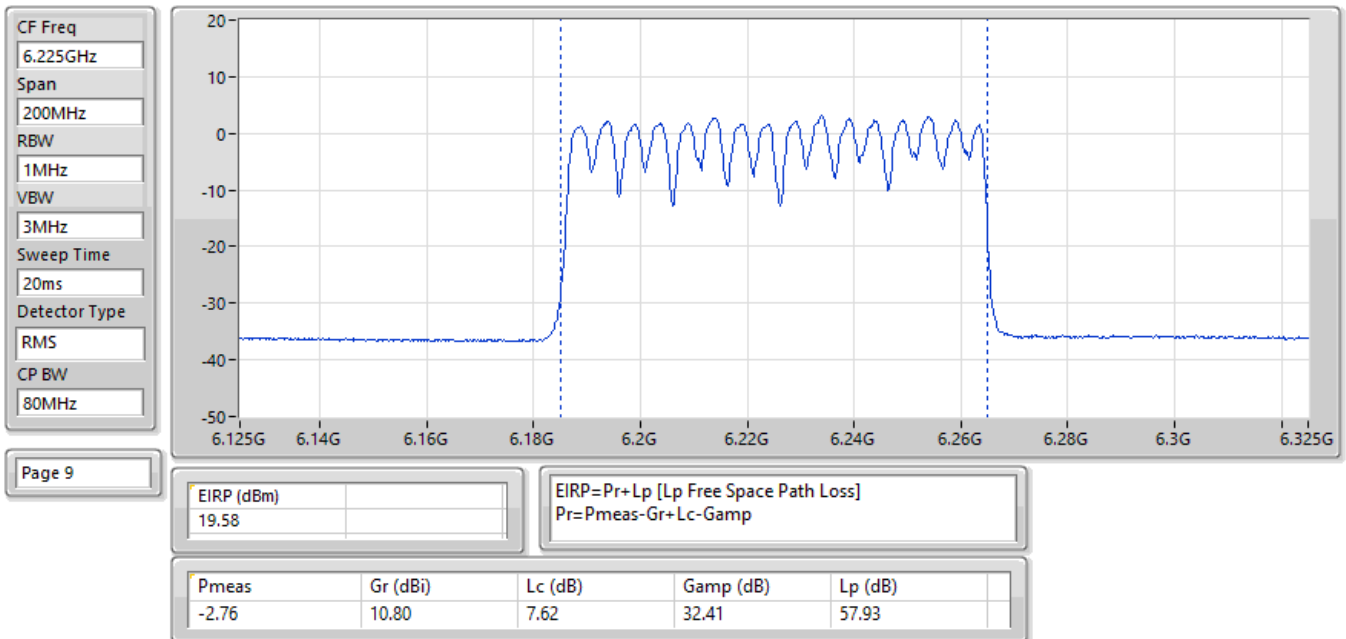


EIRP:Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6385MHz;TX

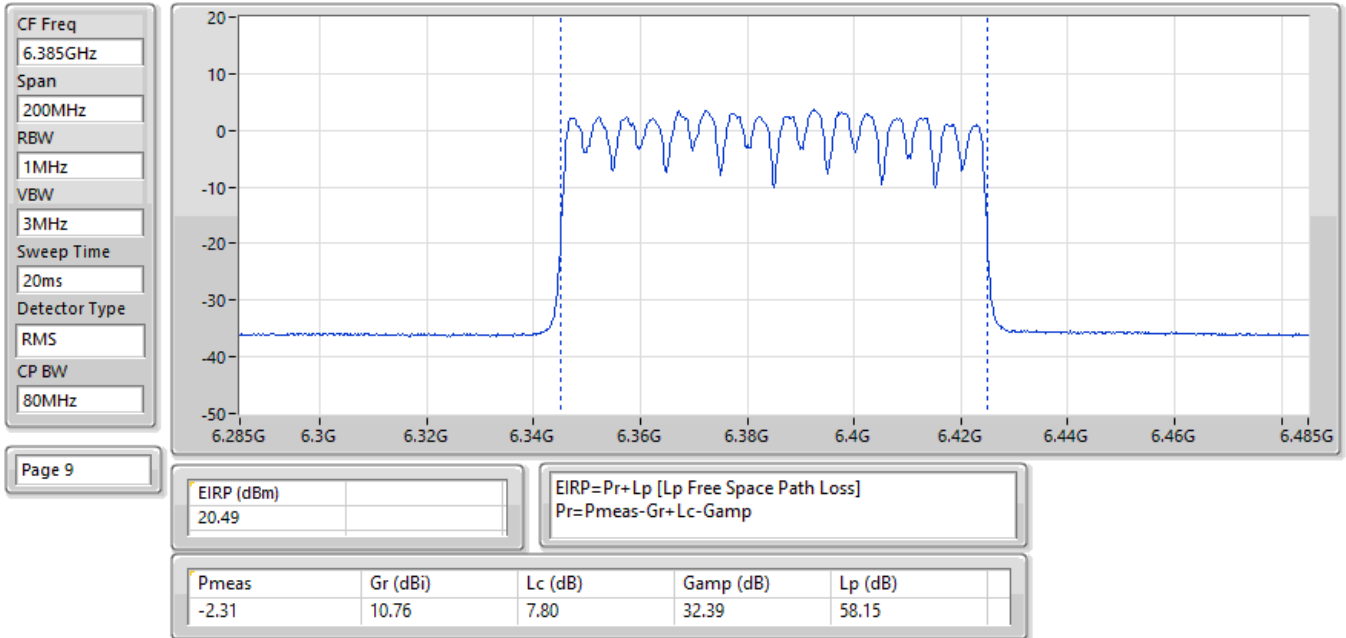


EIRP:Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6025MHz;TX

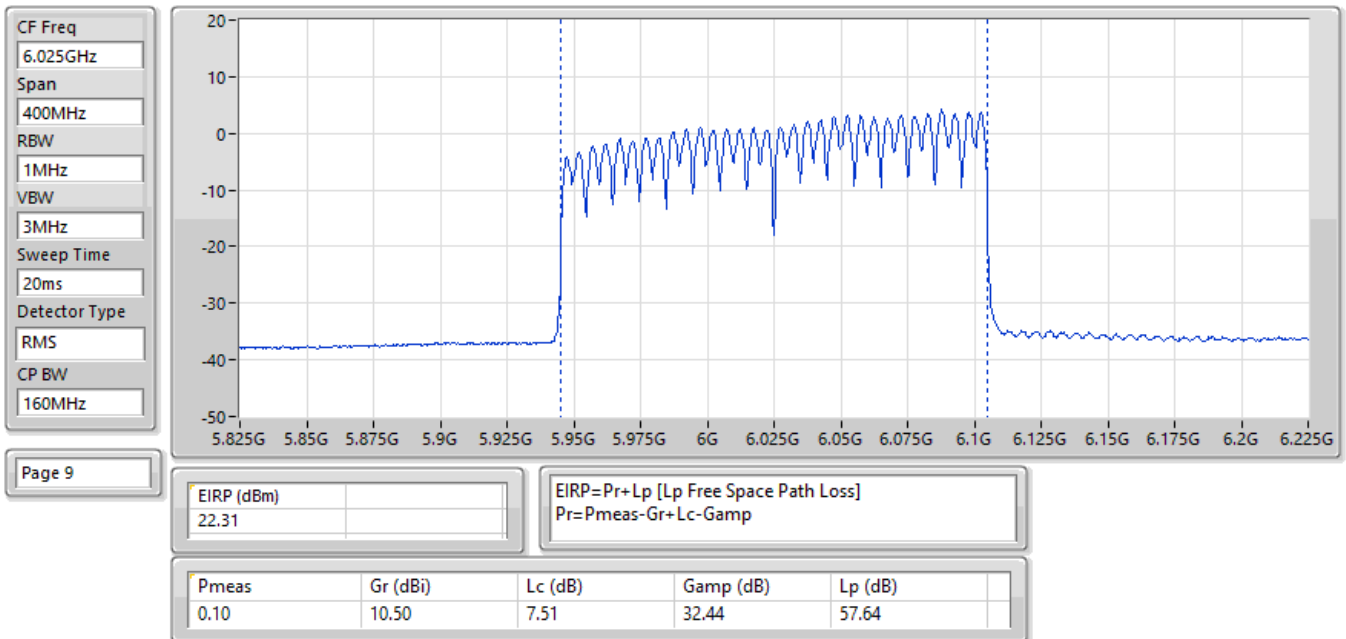


EIRP;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6185MHz;TX

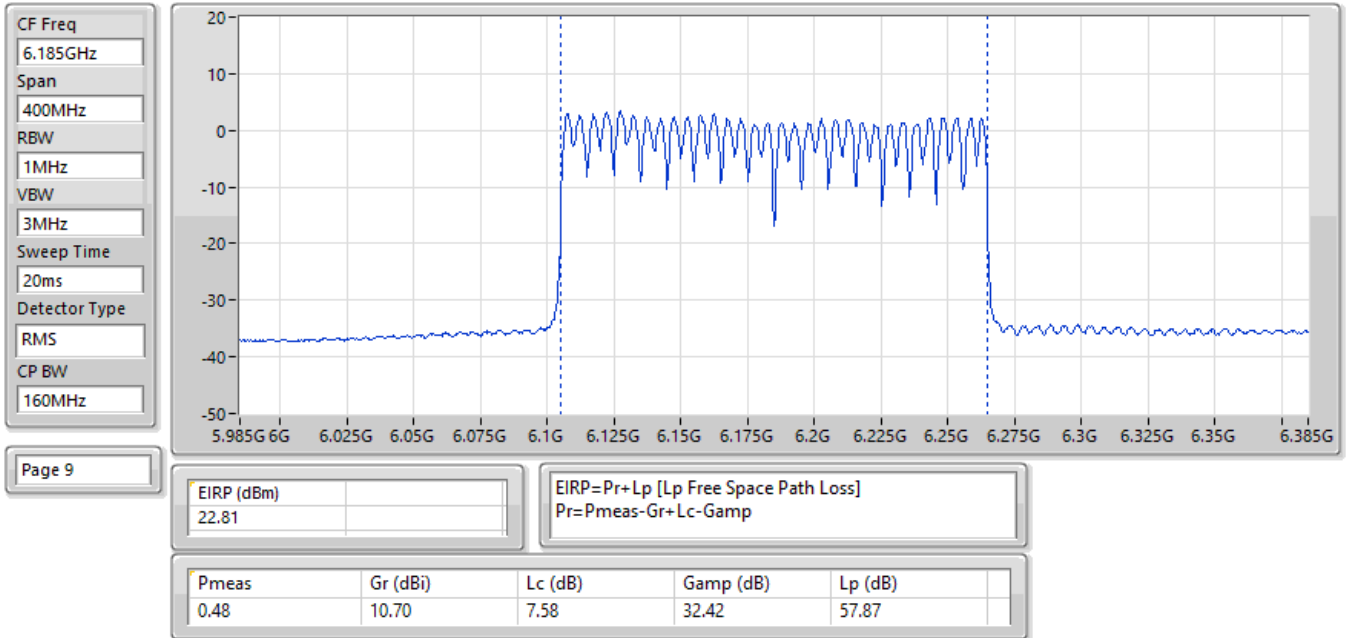


EIRP;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6345MHz;TX

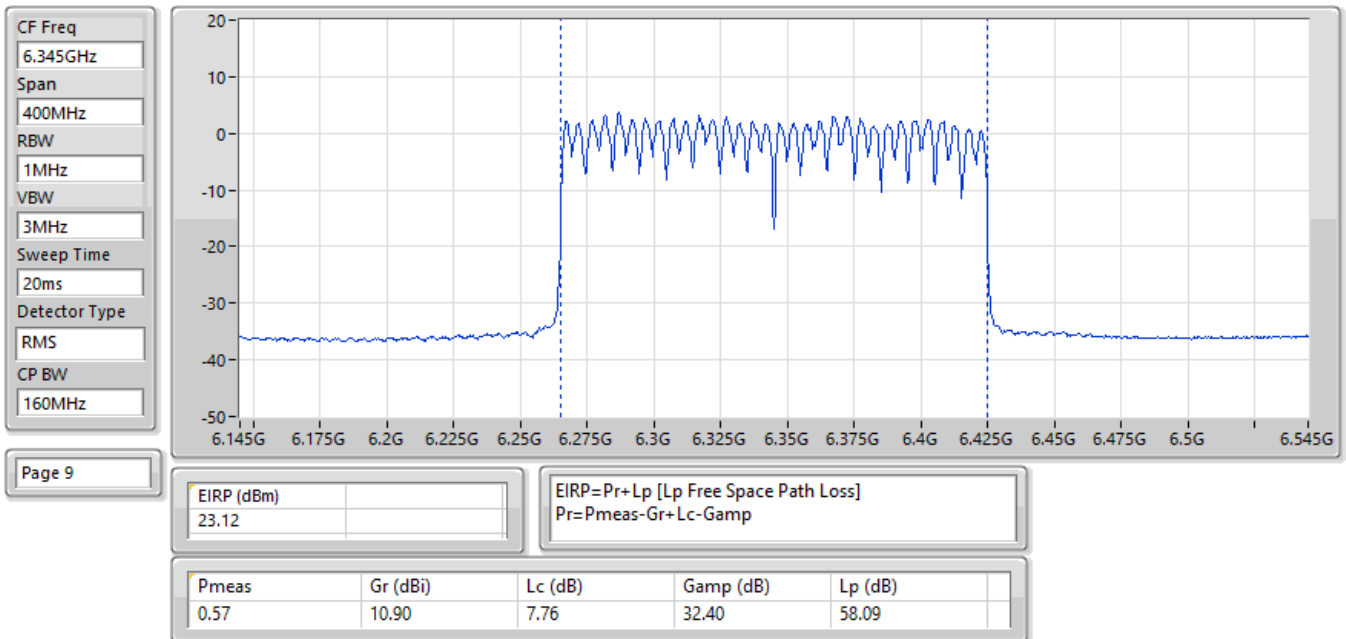


EIRP;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6105MHz;TX

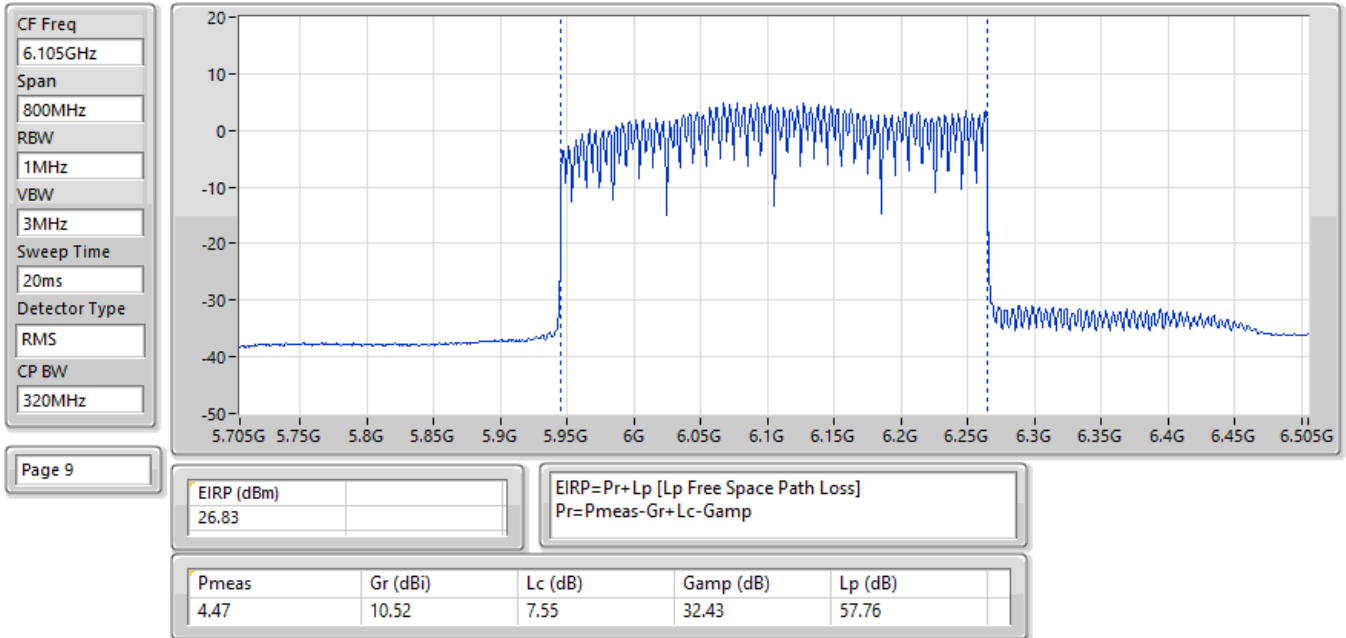


EIRP;Band:6.2G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6265MHz;TX

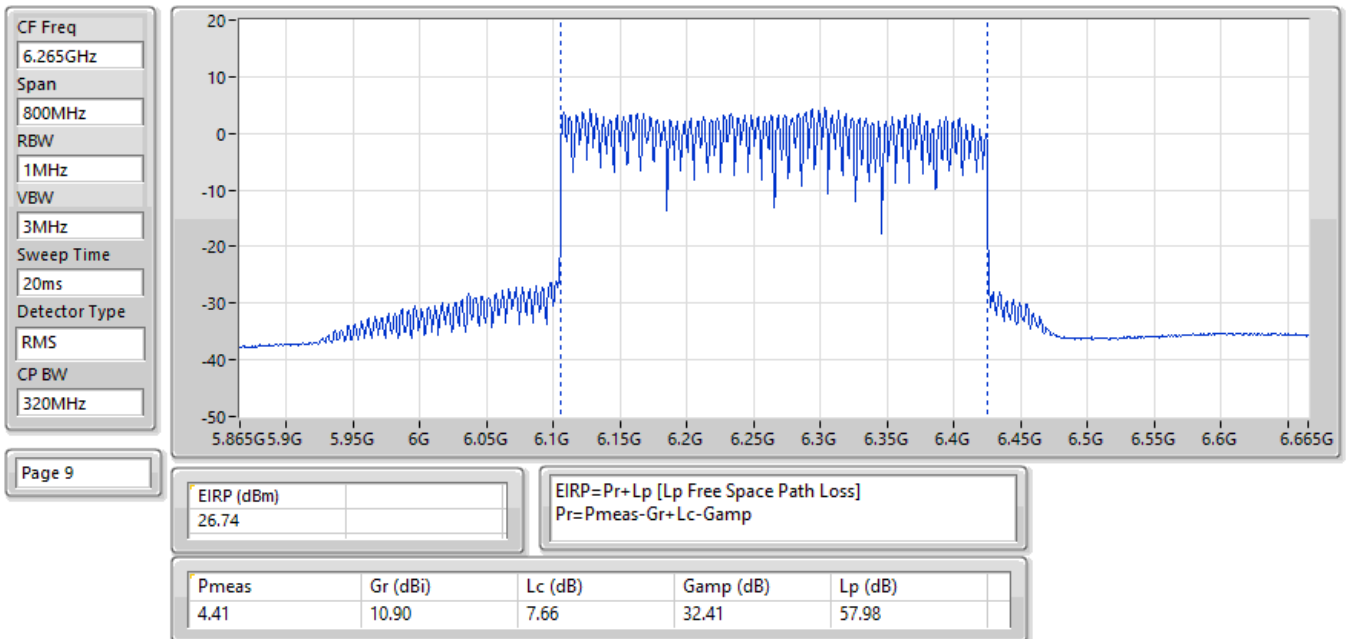


EIRP:Band:6.4G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6435MHz;TX

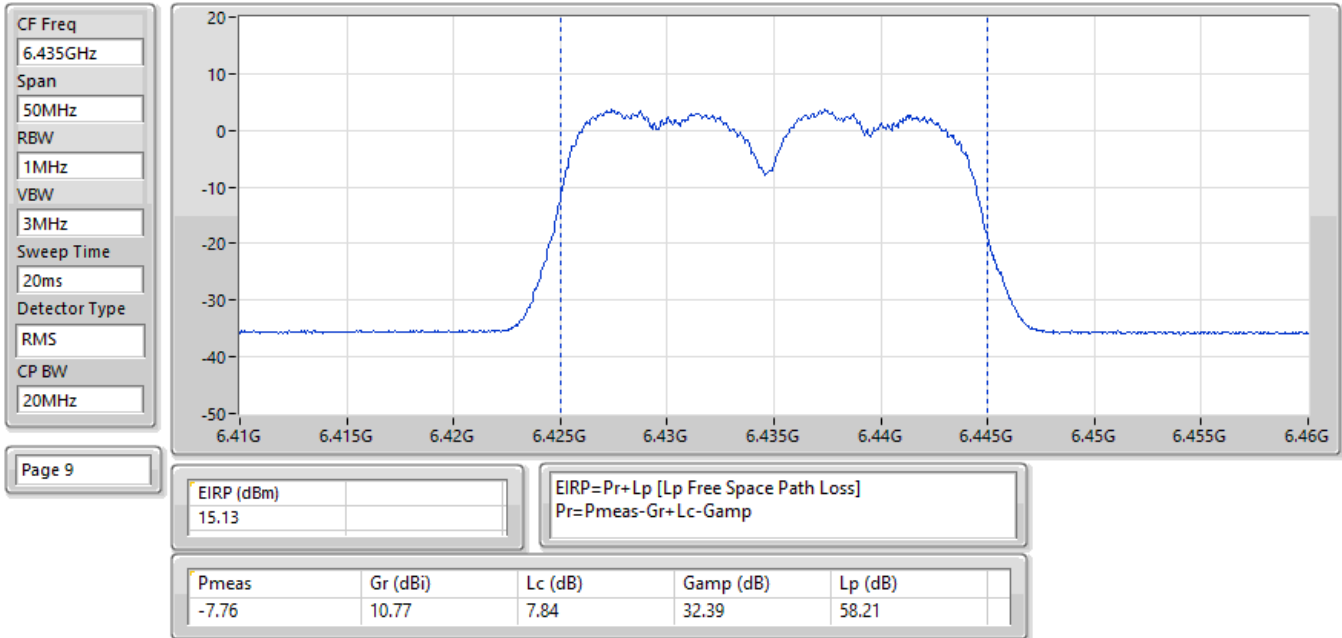


EIRP:Band:6.4G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6475MHz;TX

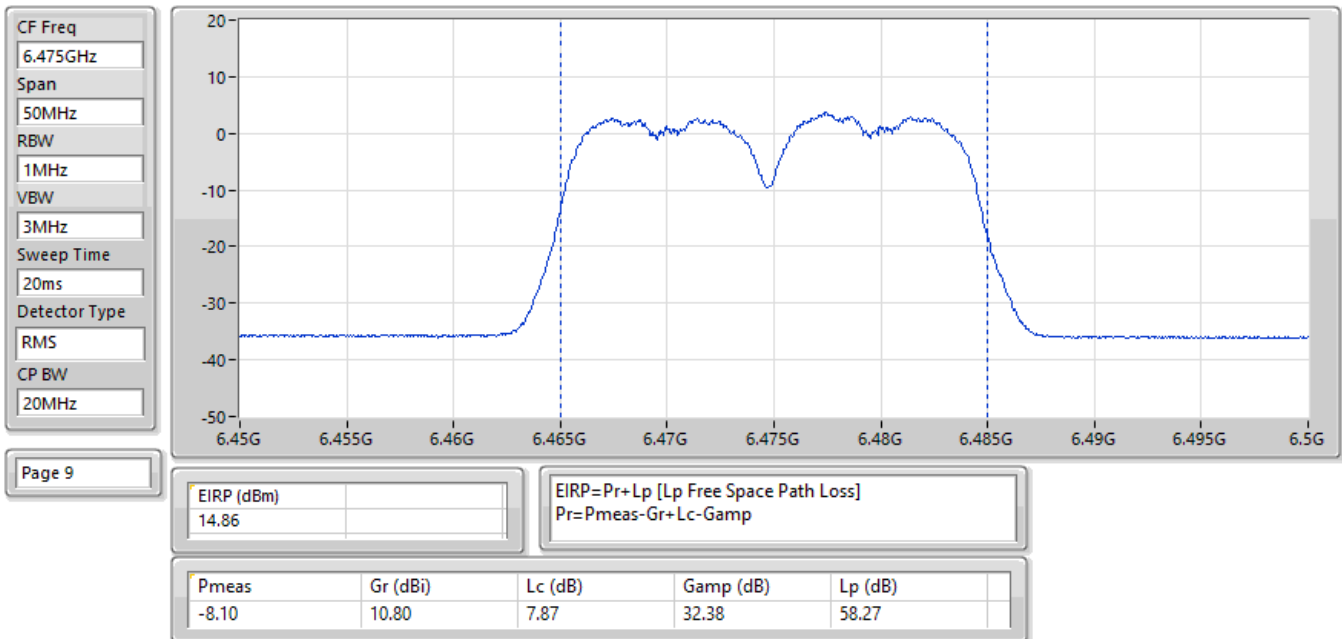


EIRP:Band:6.4G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6515MHz;TX

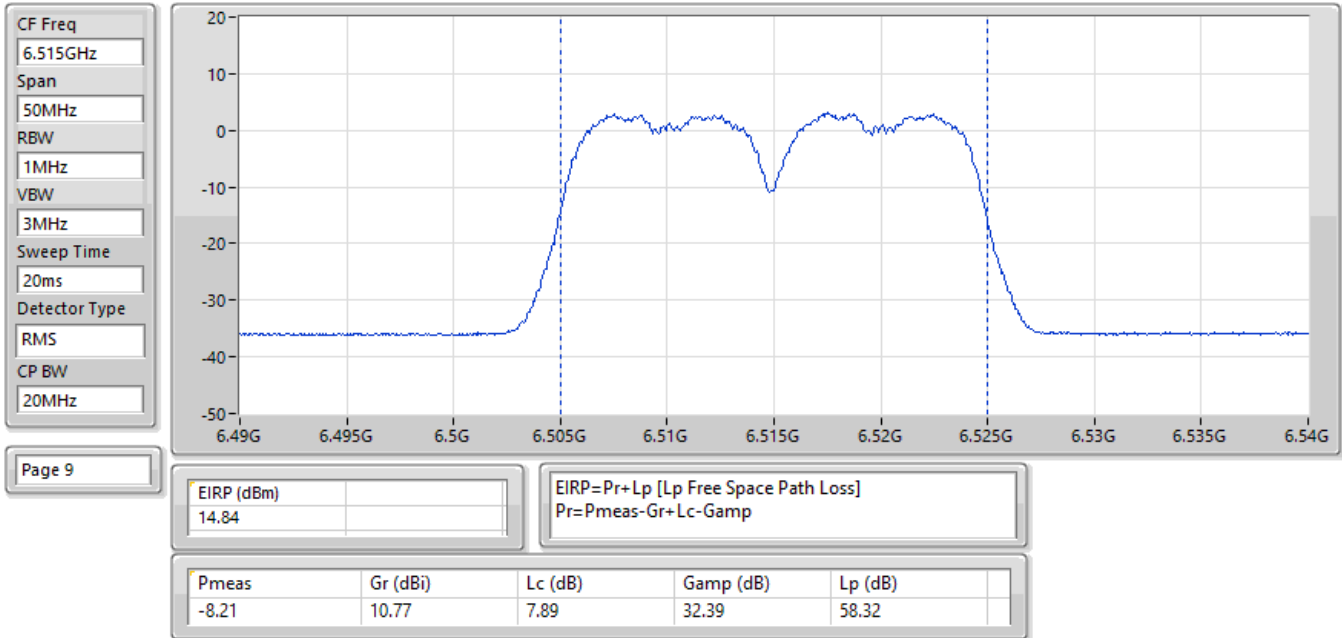


EIRP:Band:6.4G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6445MHz;TX

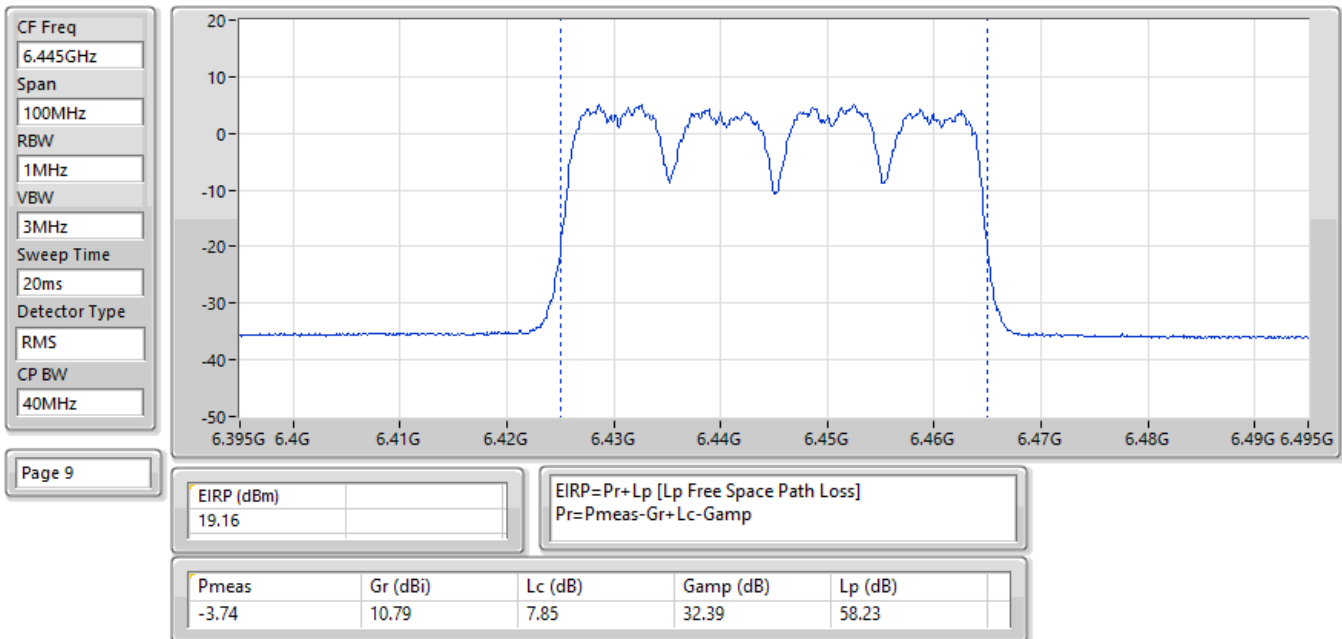


EIRP:Band:6.4G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6485MHz;TX

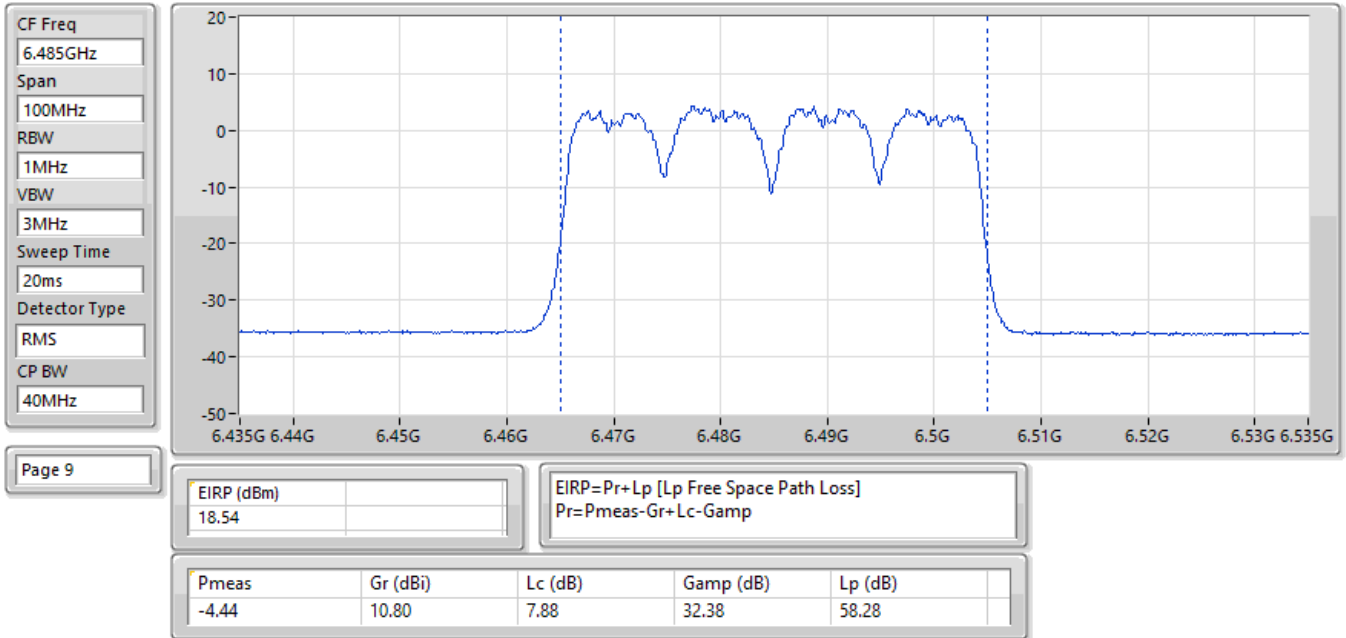


EIRP:Band:6.4G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6525MHz;TX

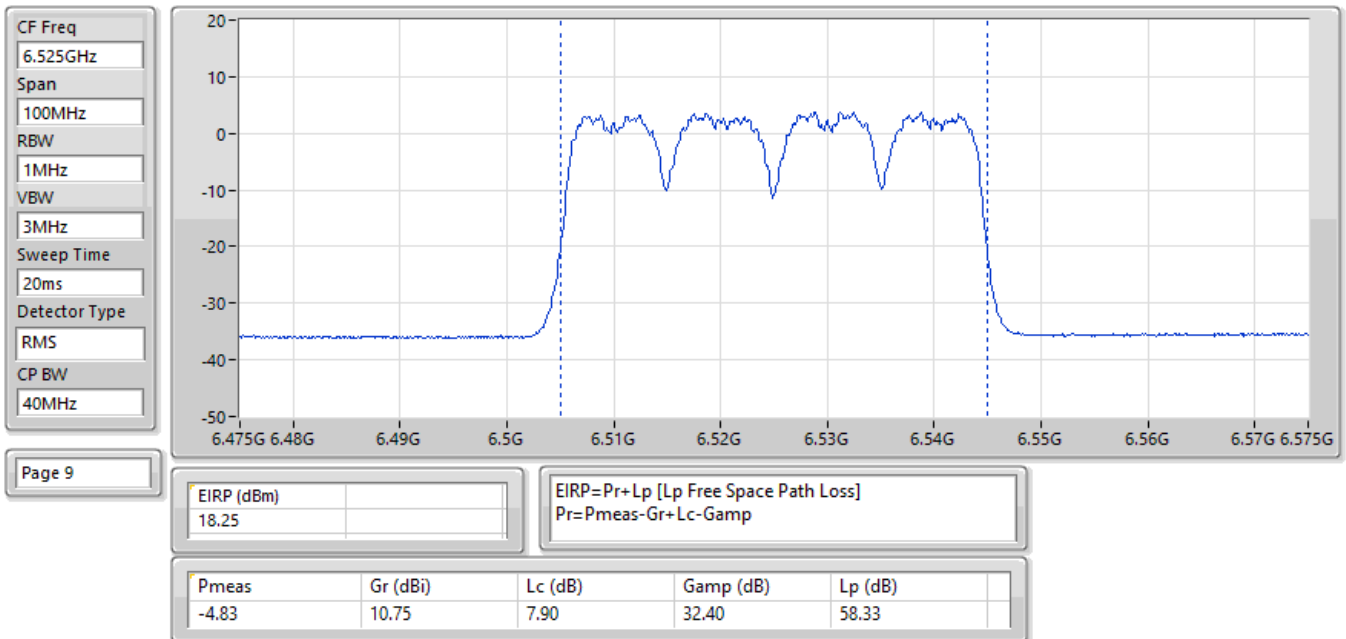


EIRP:Band:6.4G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6465MHz;TX

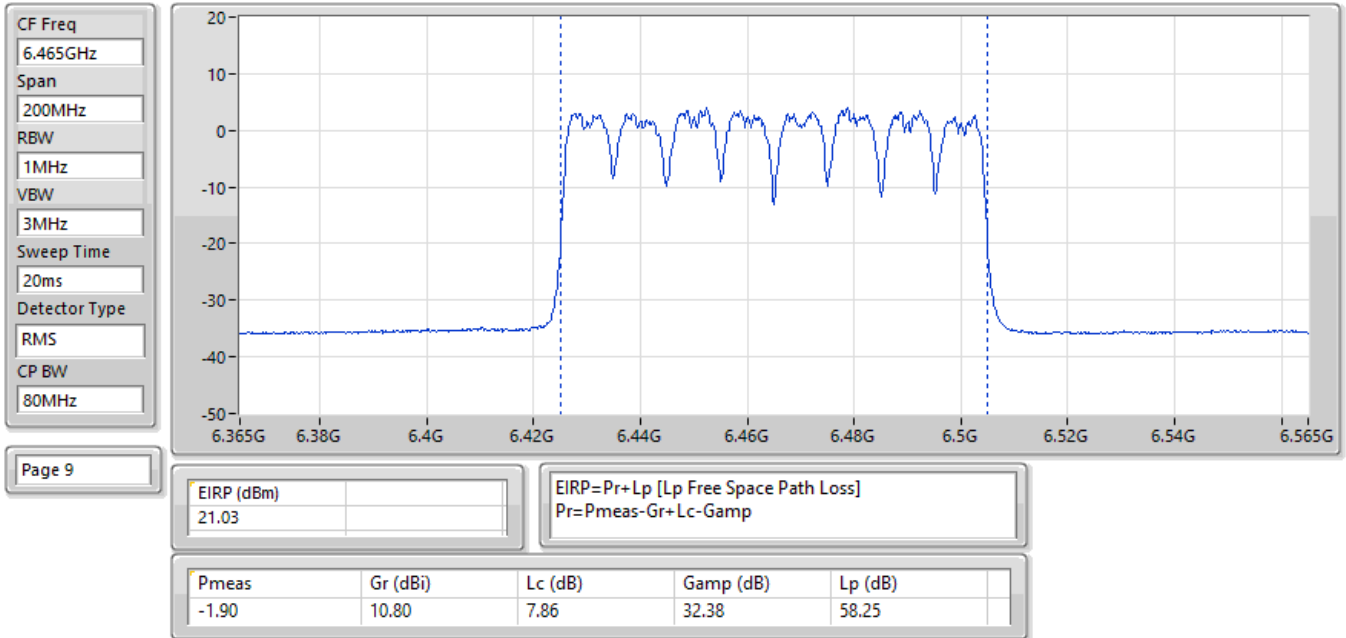


EIRP:Band:6.4G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6545MHz;TX

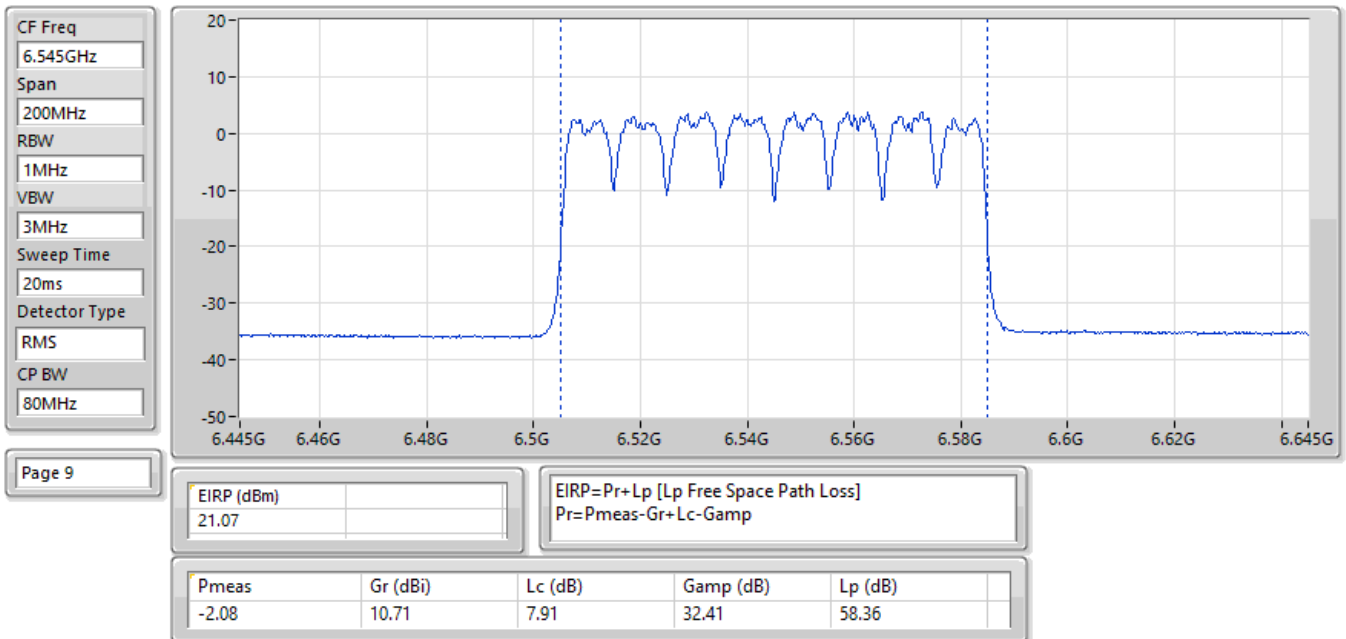


EIRP;Band:6.4G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6505MHz;TX

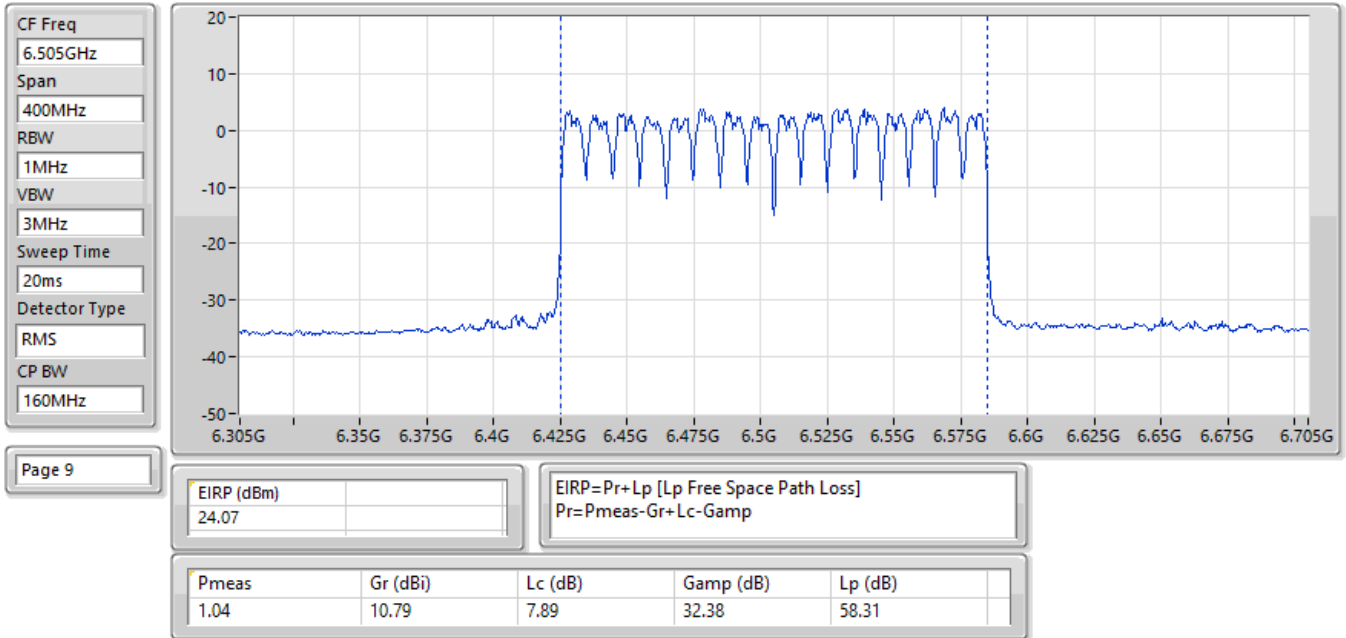


EIRP;Band:6.4G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6585MHz;TX

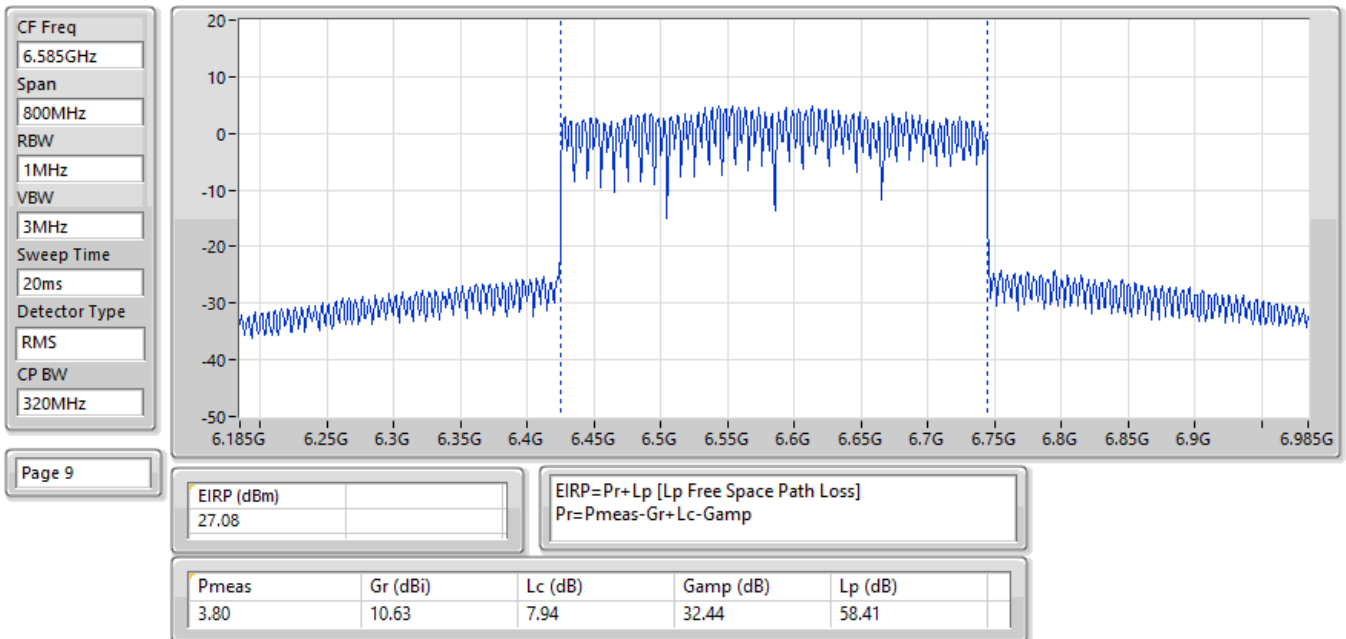


EIRP:Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6535MHz;TX

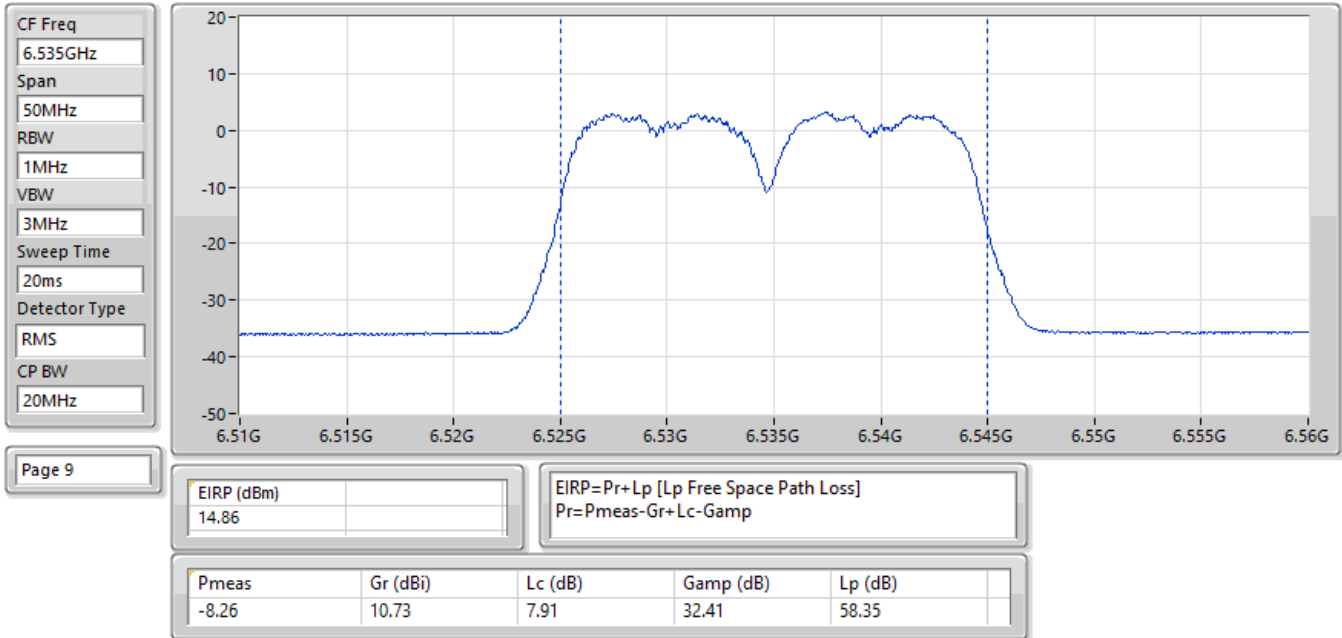


EIRP:Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6695MHz;TX

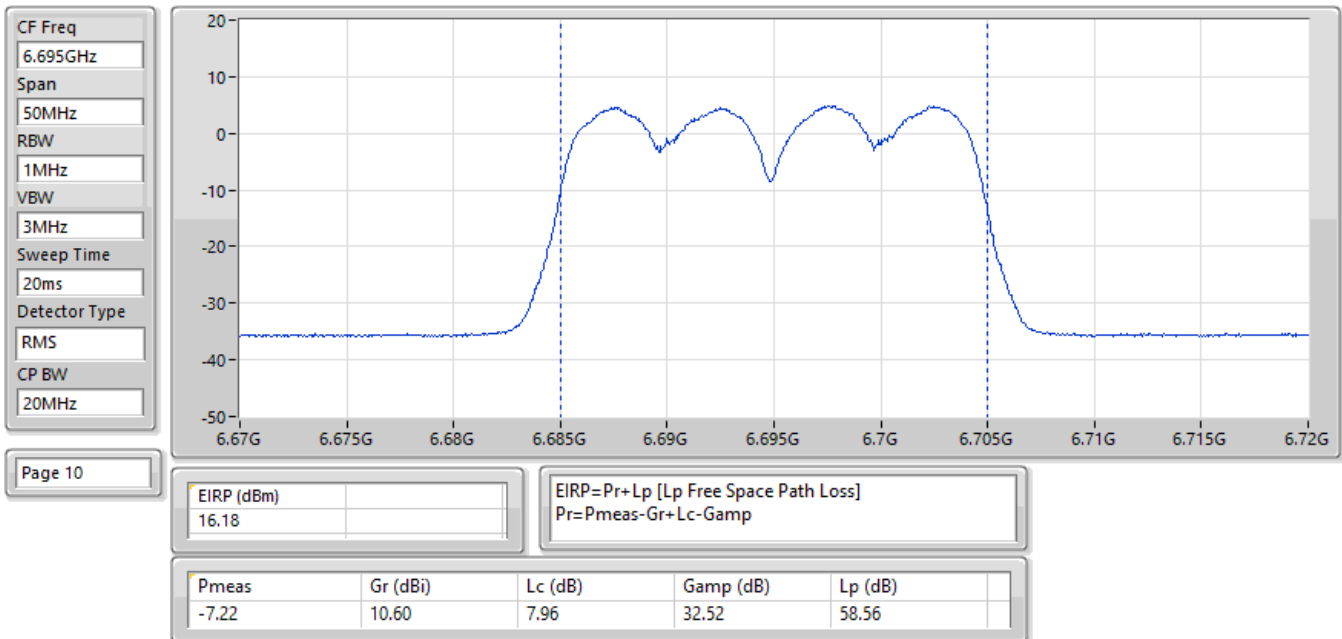


EIRP:Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6875MHz;TX

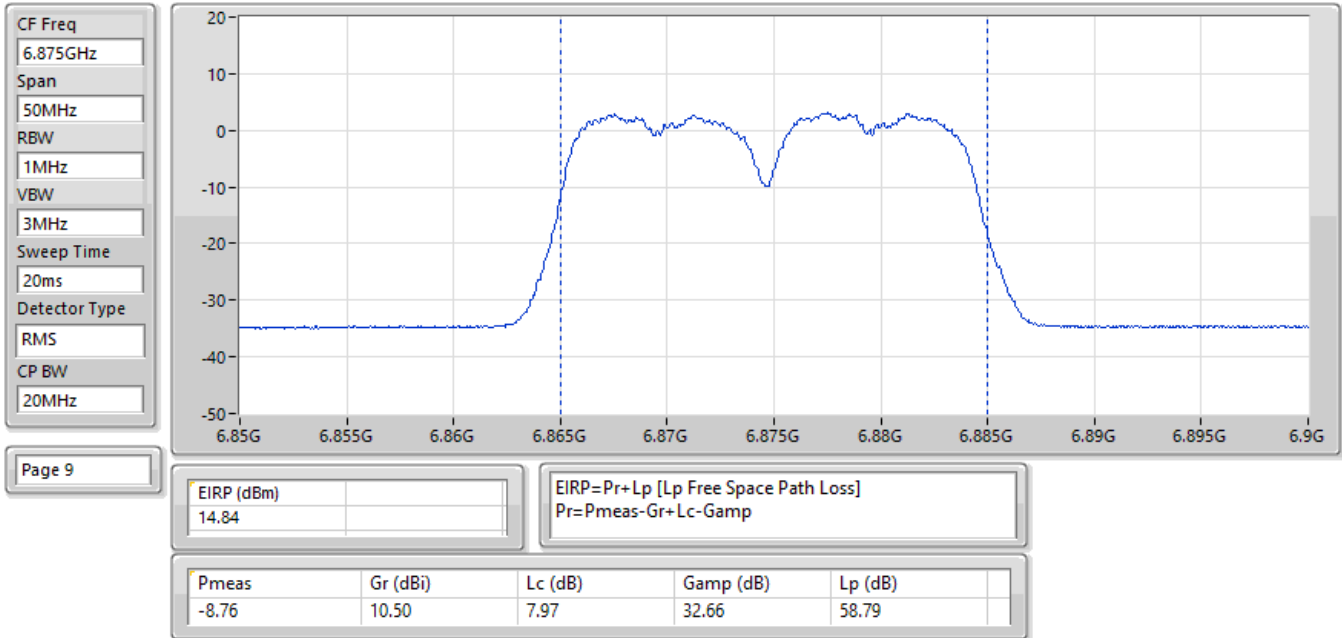


EIRP:Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6565MHz;TX

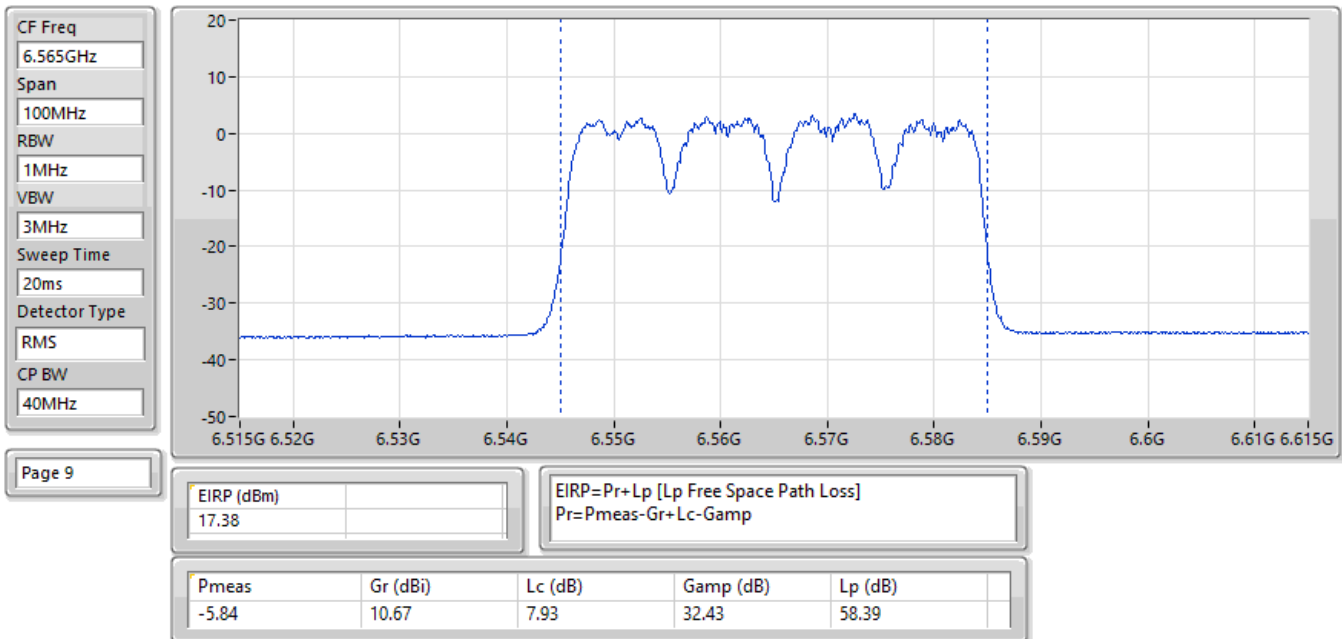


EIRP:Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6685MHz;TX

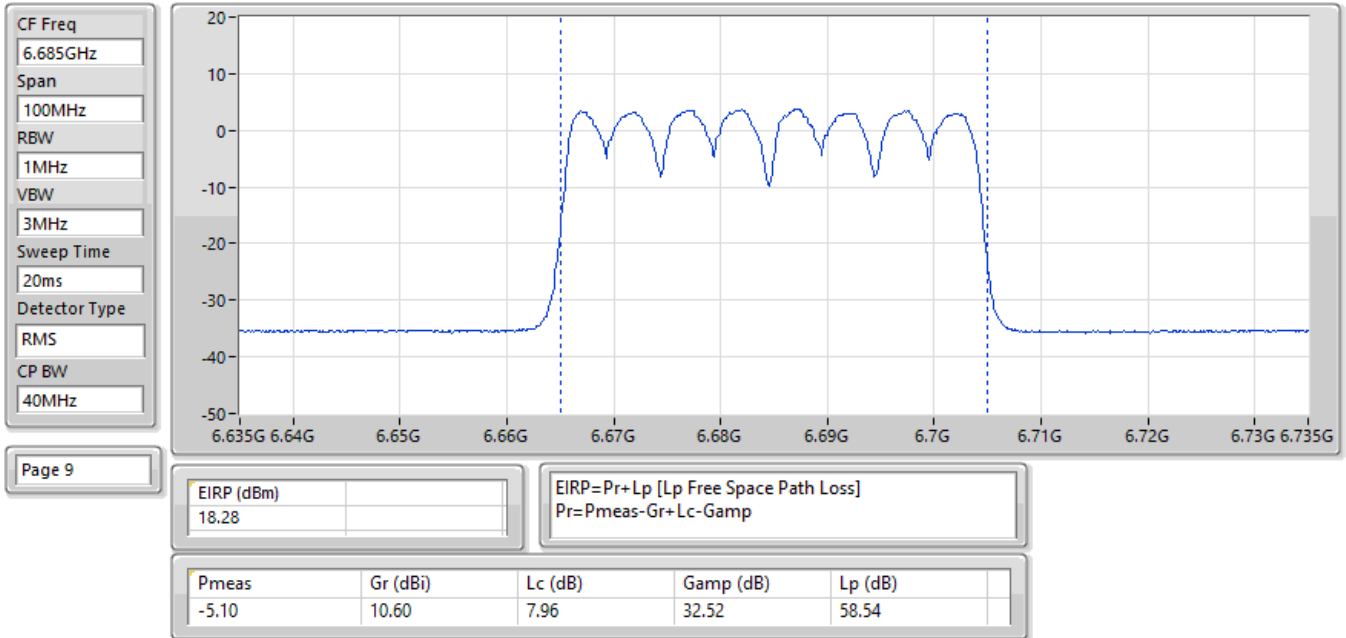


EIRP:Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6685MHz;TX

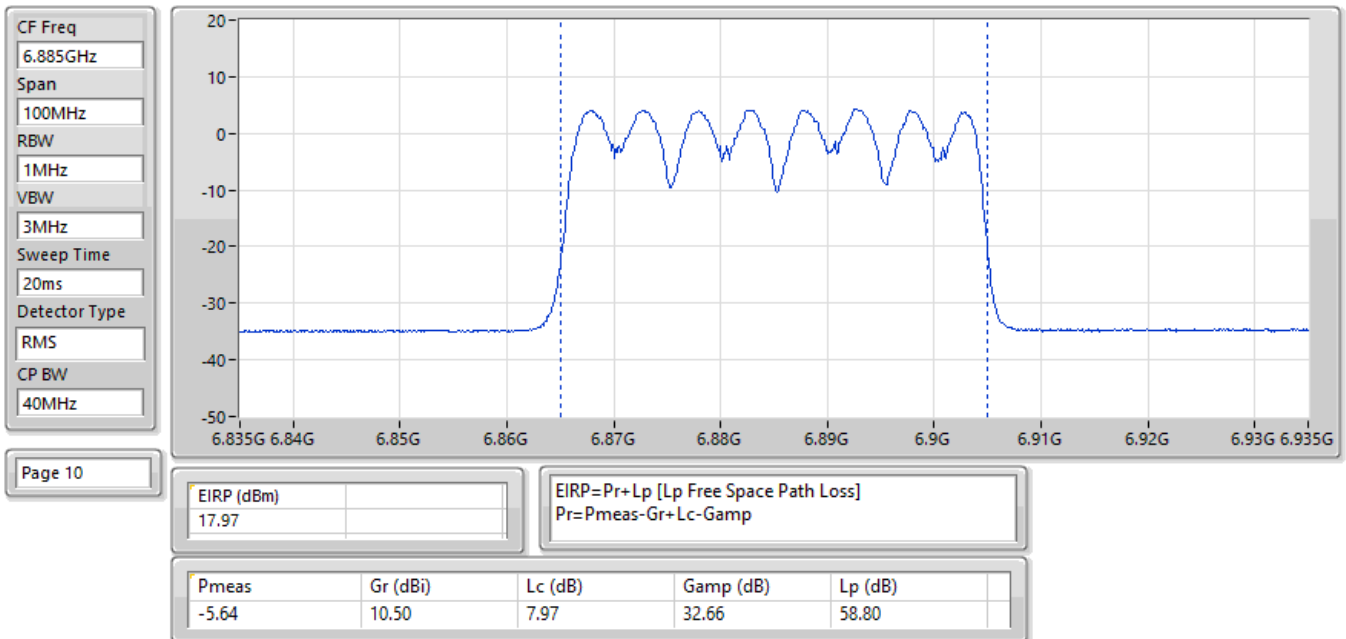


EIRP:Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6625MHz;TX

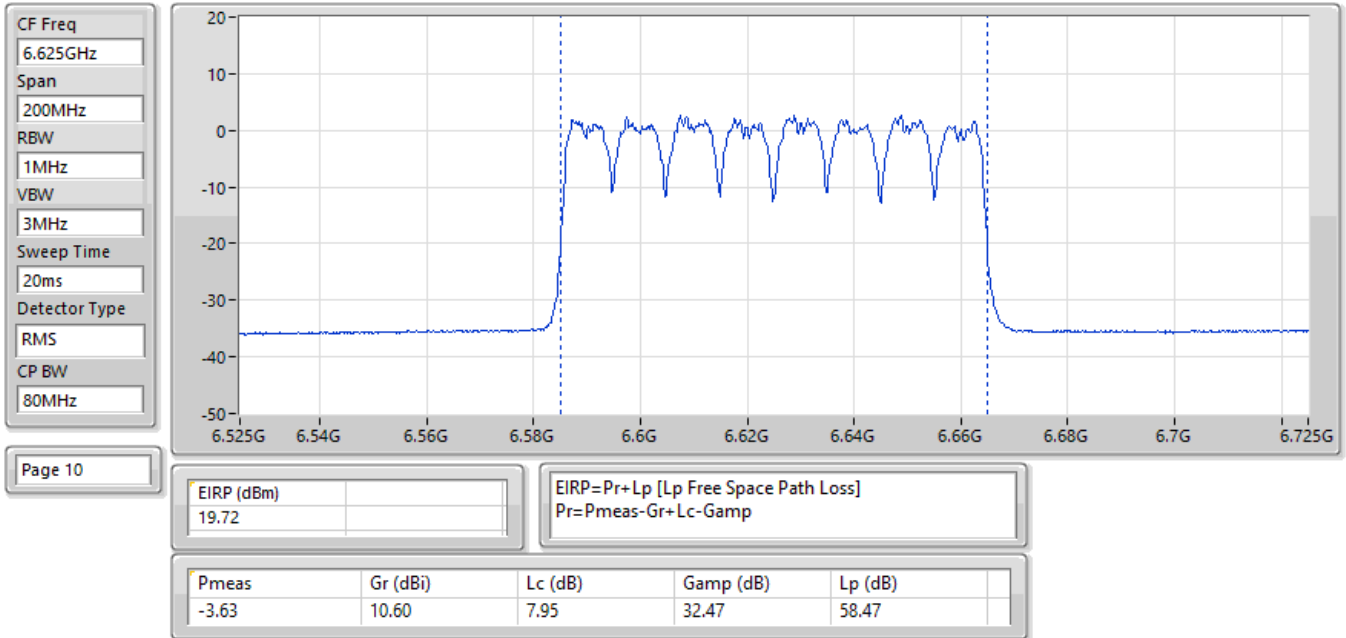


EIRP:Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6705MHz;TX

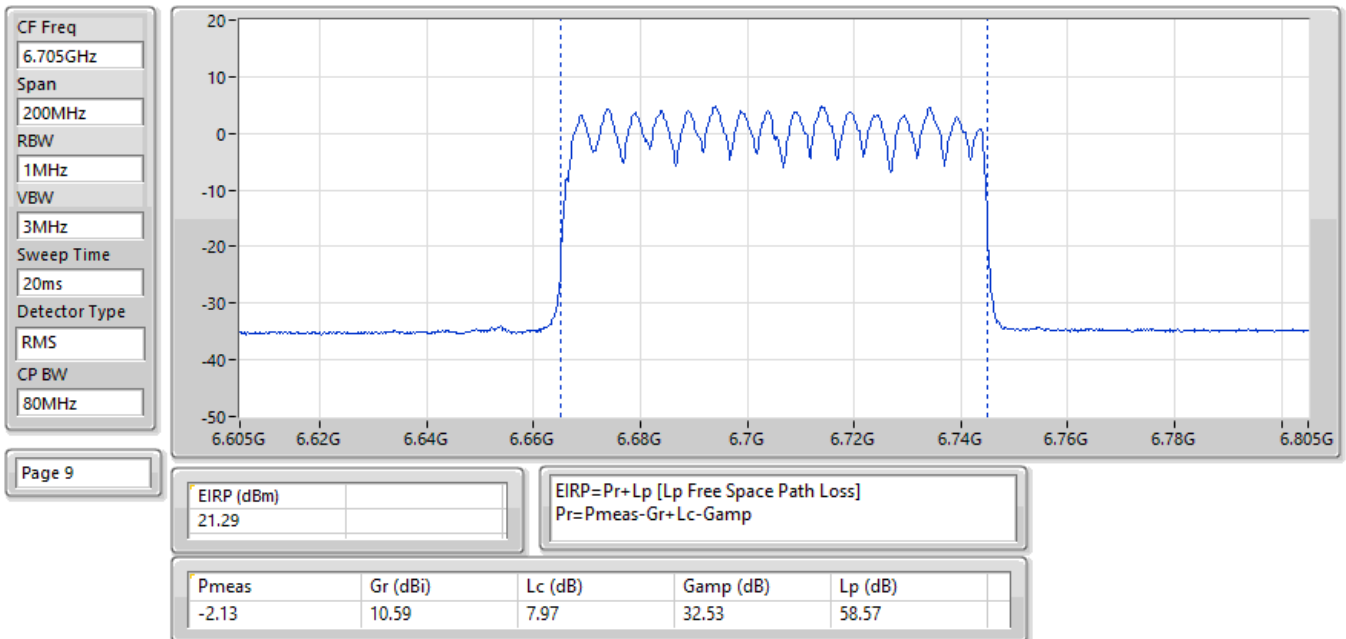


EIRP:Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6785MHz;TX

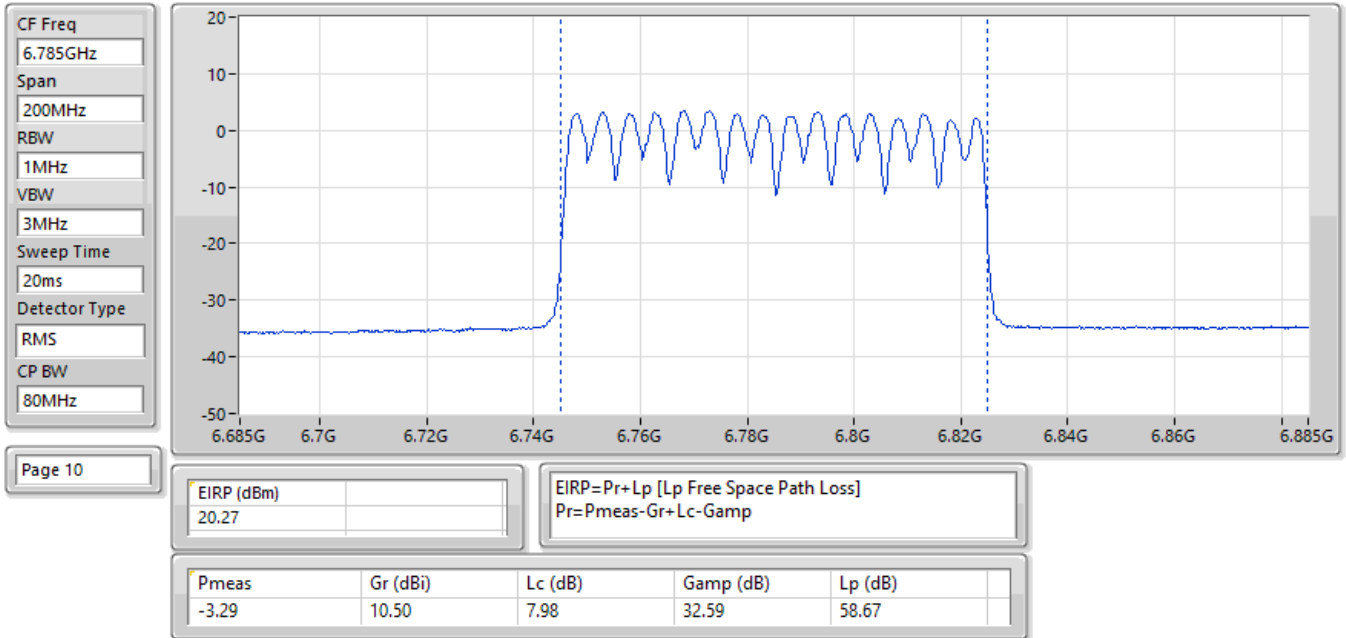


EIRP:Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6865MHz;TX

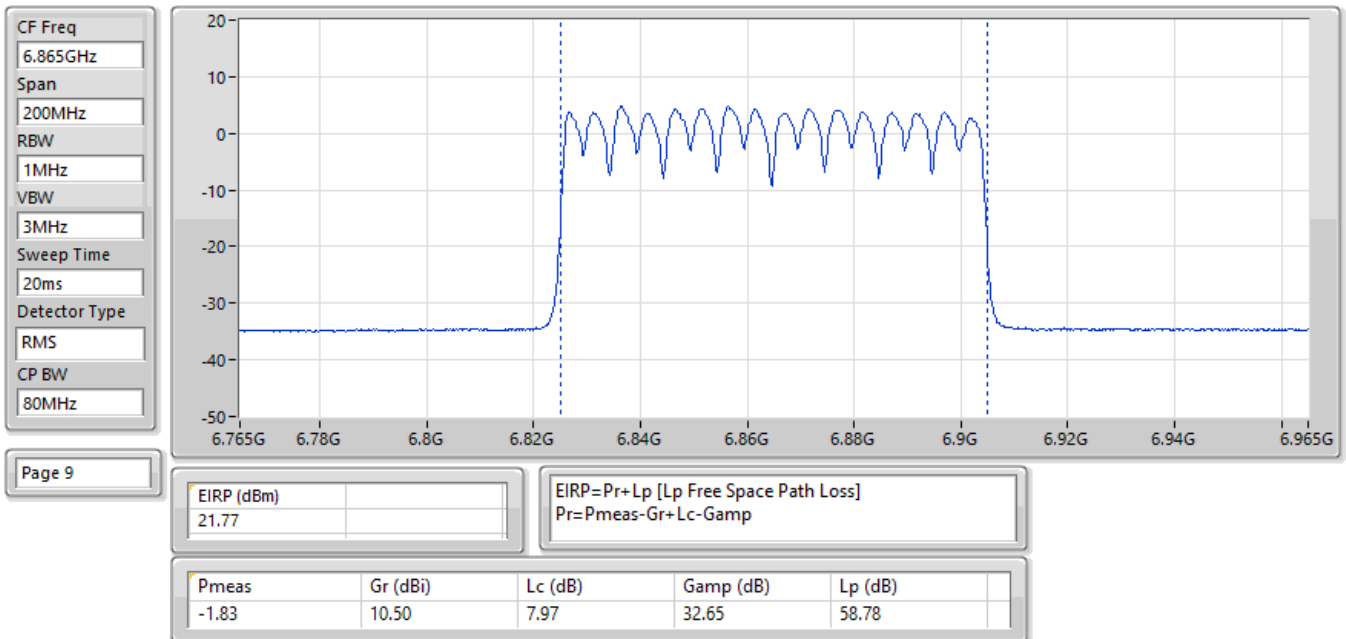


EIRP;Band:6.7G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6665MHz;TX

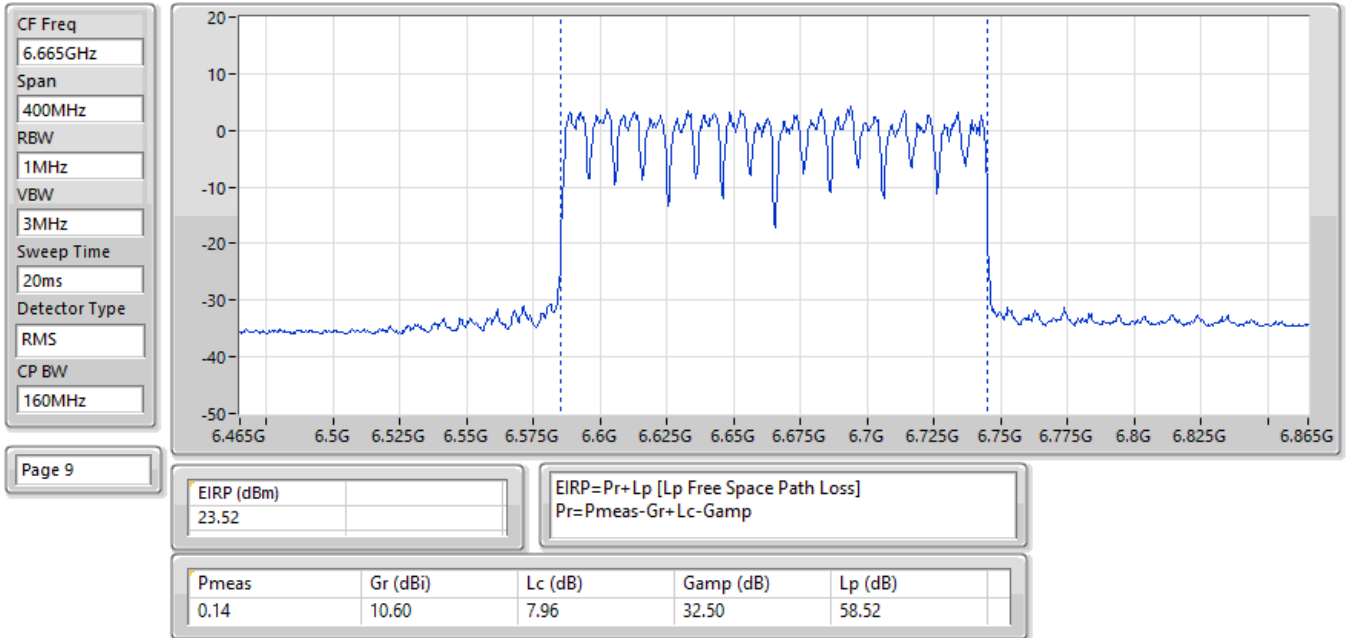


EIRP;Band:6.7G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6825MHz;TX

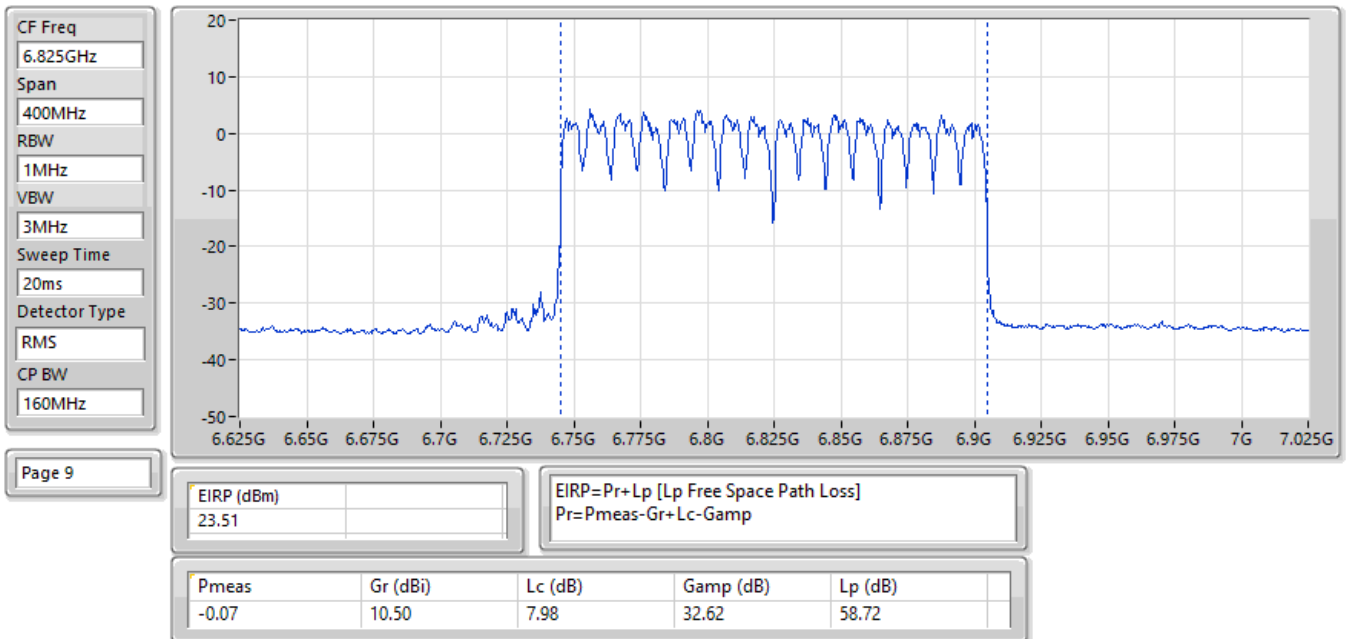


EIRP;Band:6.7G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6745MHz;TX

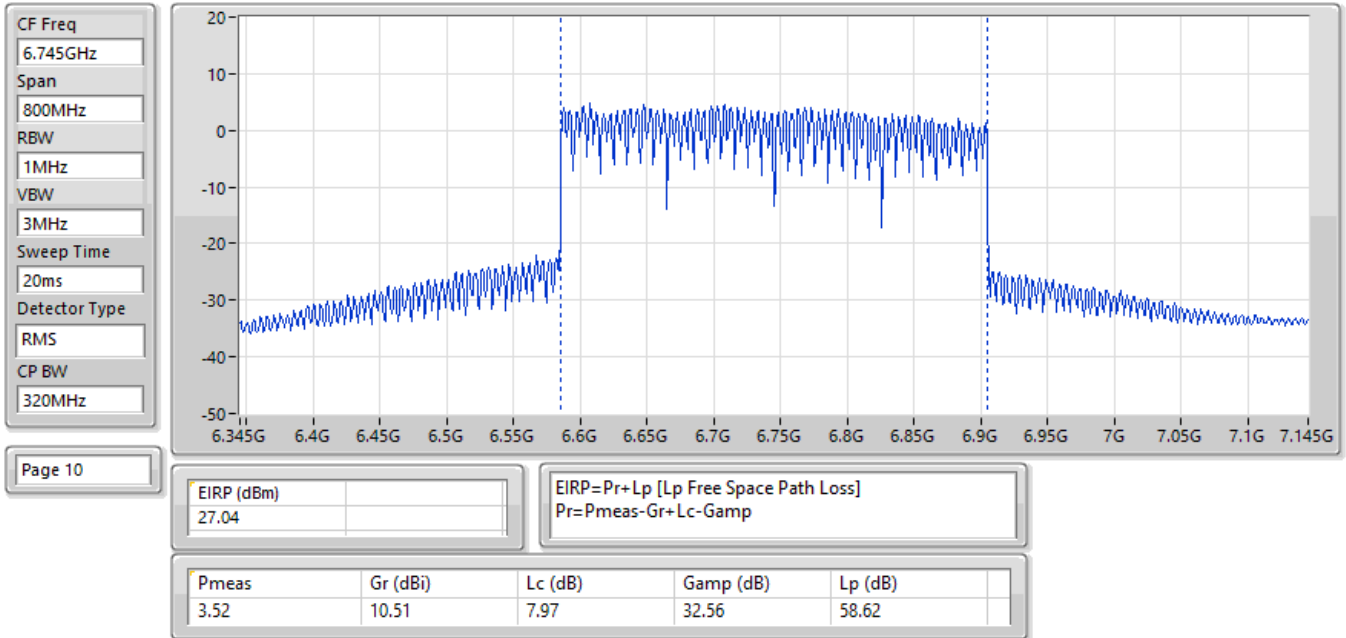


EIRP;Band:6.7G;be320;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6905MHz;TX

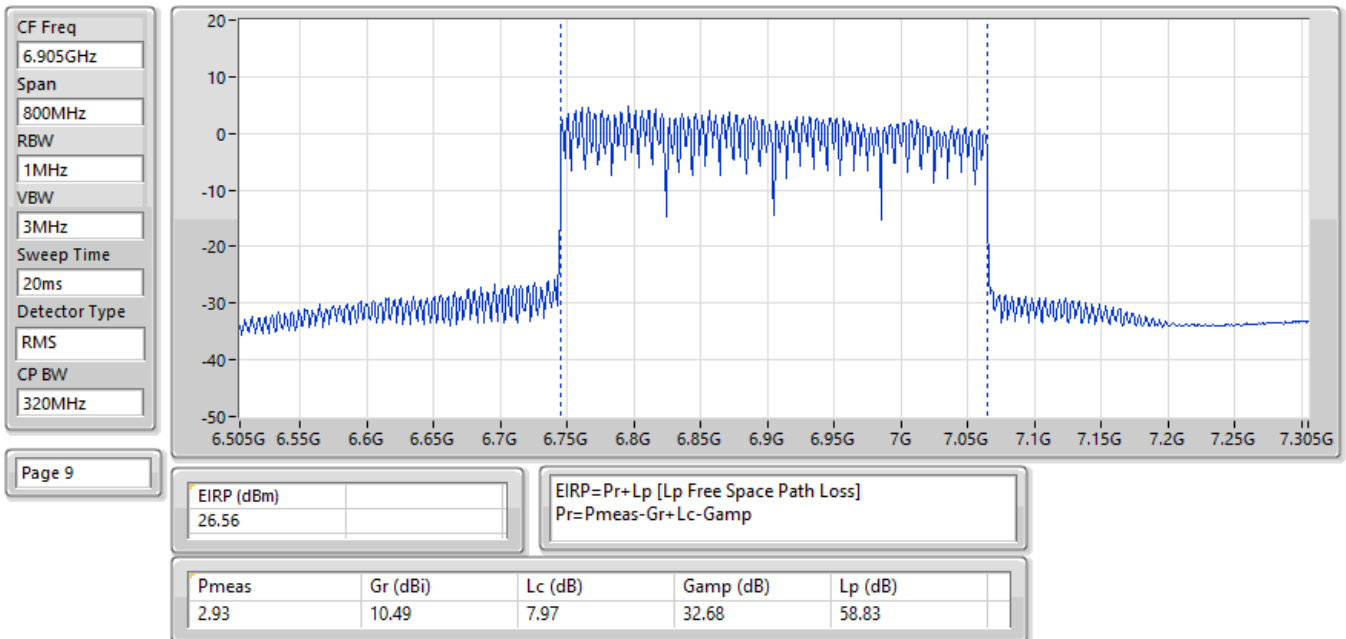


EIRP:Band:7.0G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6895MHz;TX

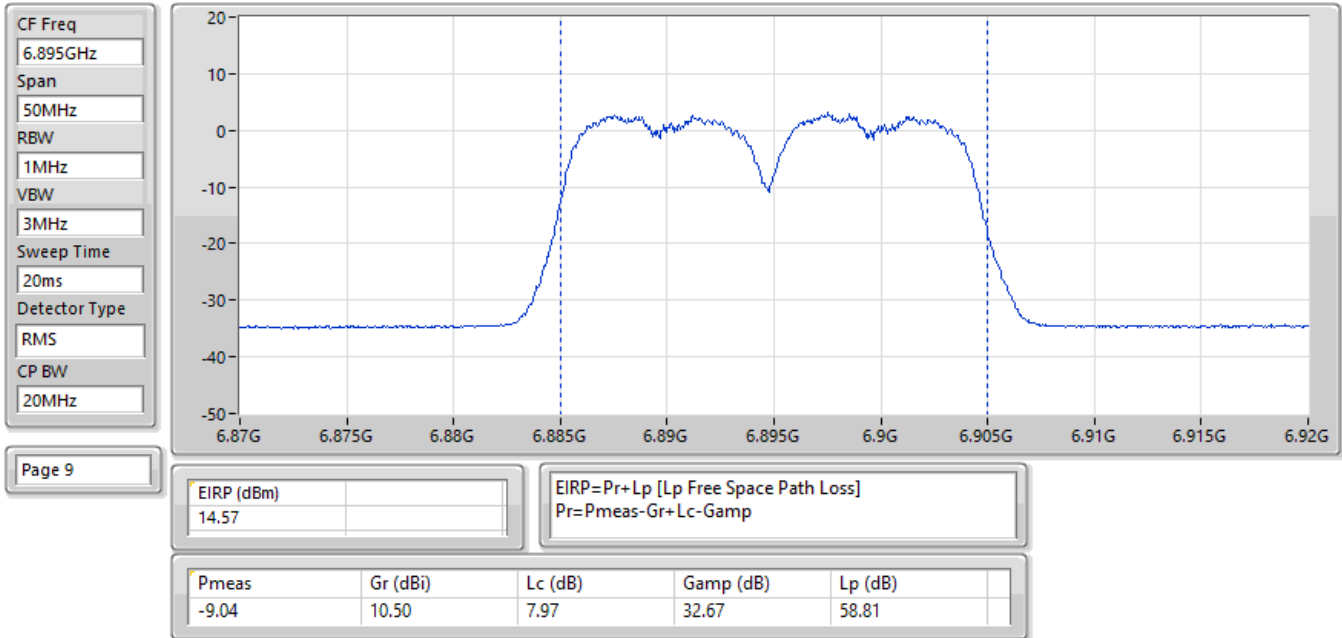


EIRP:Band:7.0G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6995MHz;TX

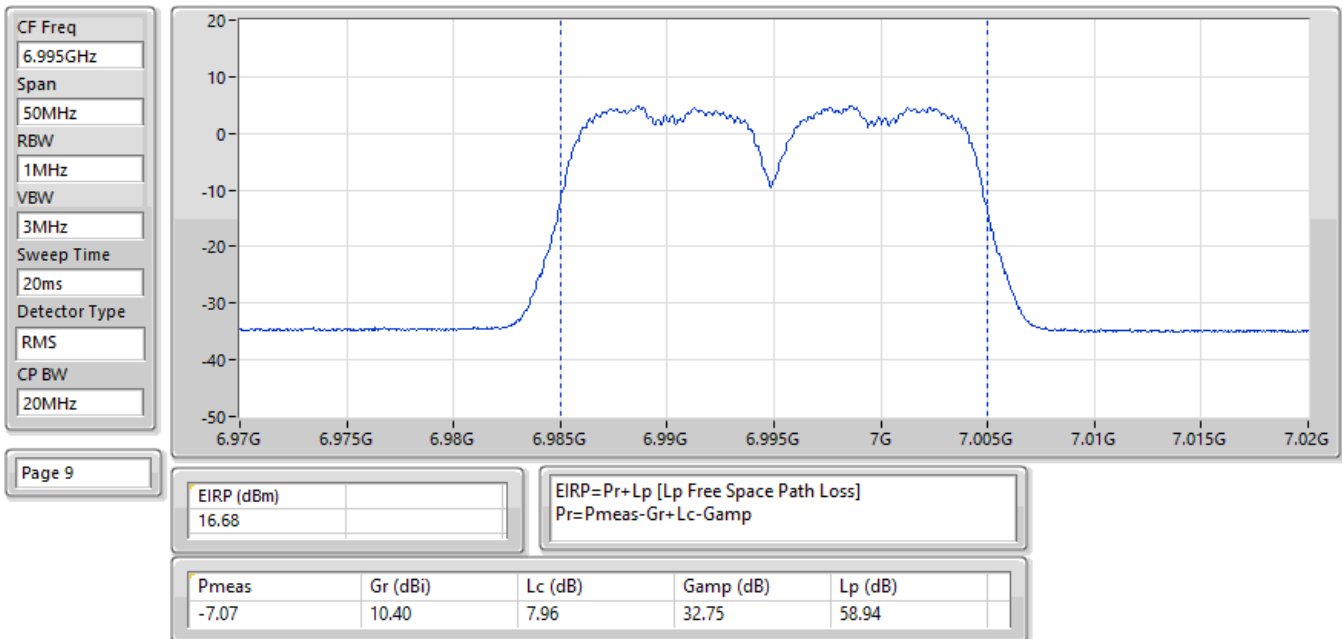


EIRP:Band:7.0G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:7095MHz;TX

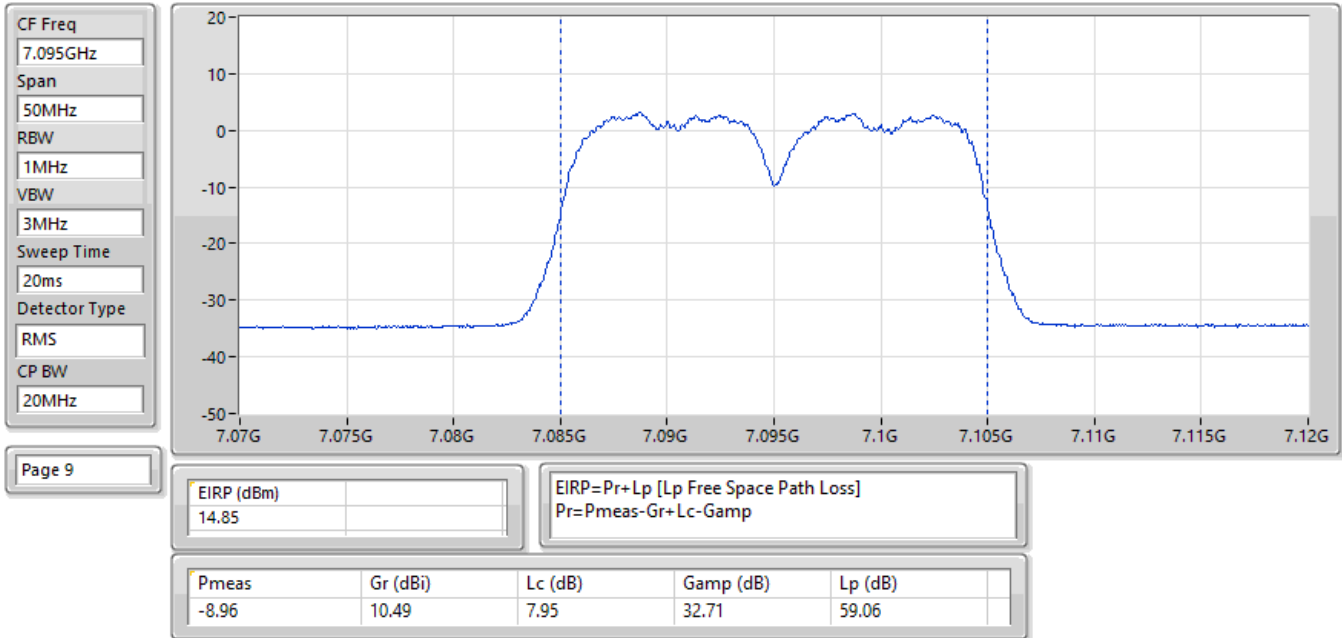


EIRP:Band:7.0G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6925MHz;TX

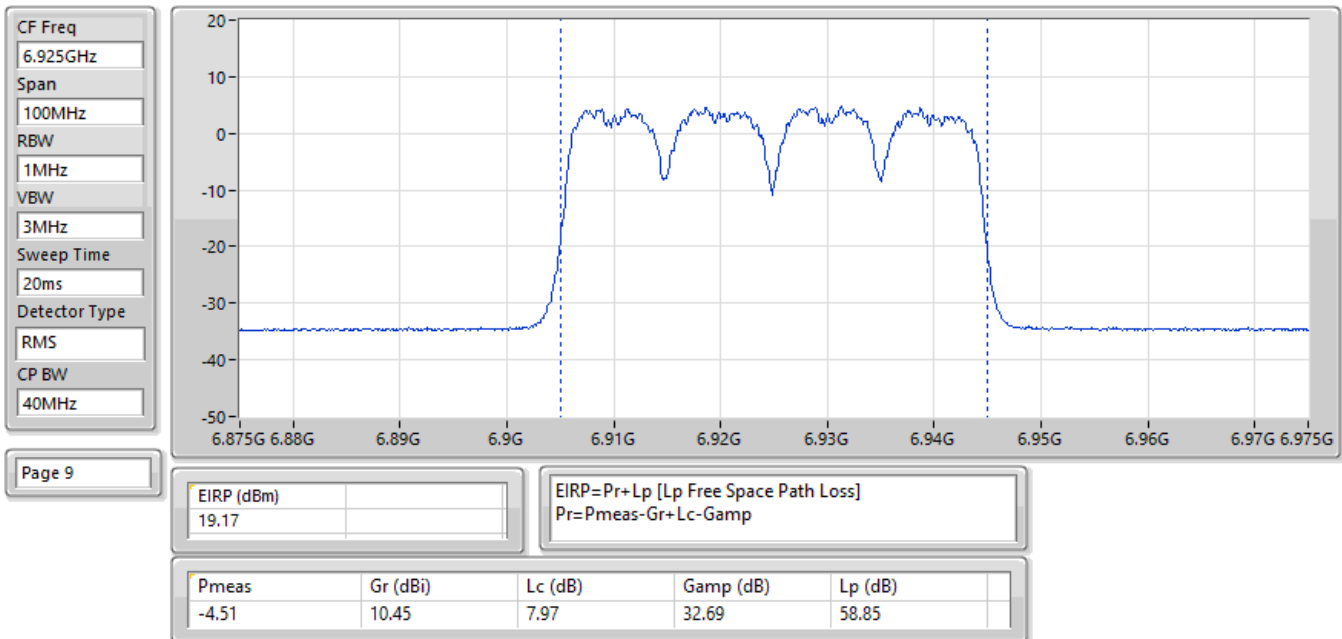


EIRP:Band:7.0G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:7005MHz;TX

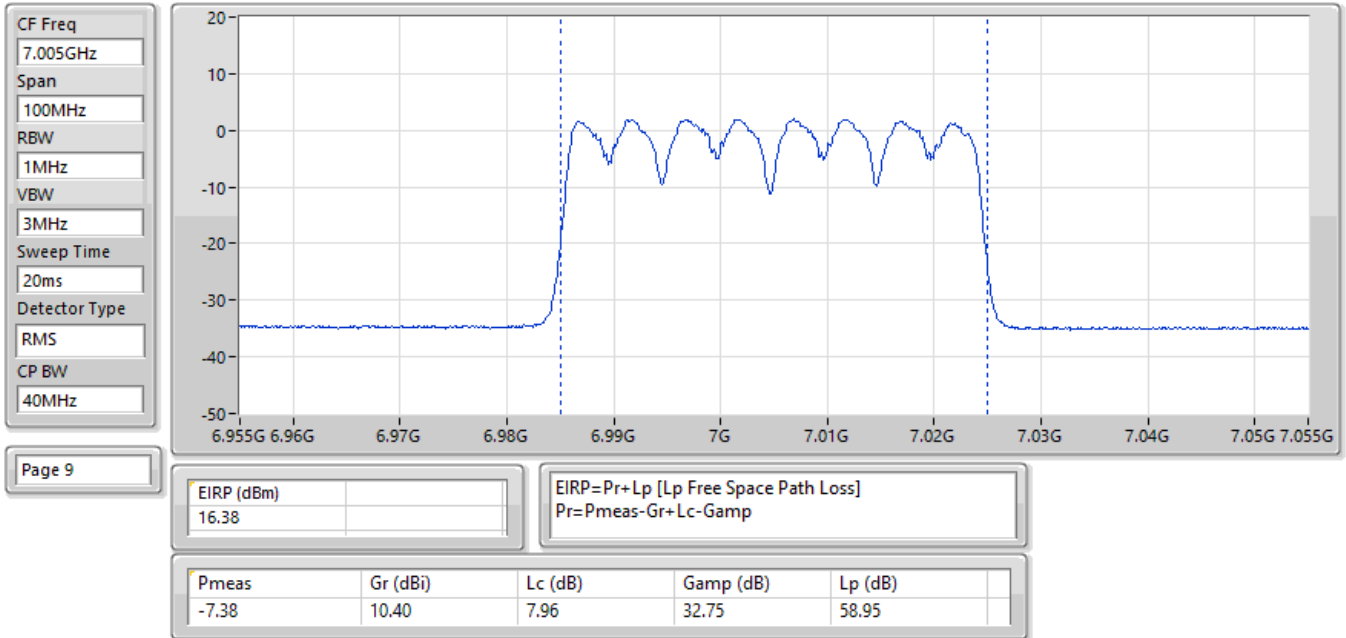


EIRP:Band:7.0G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:7085MHz;TX

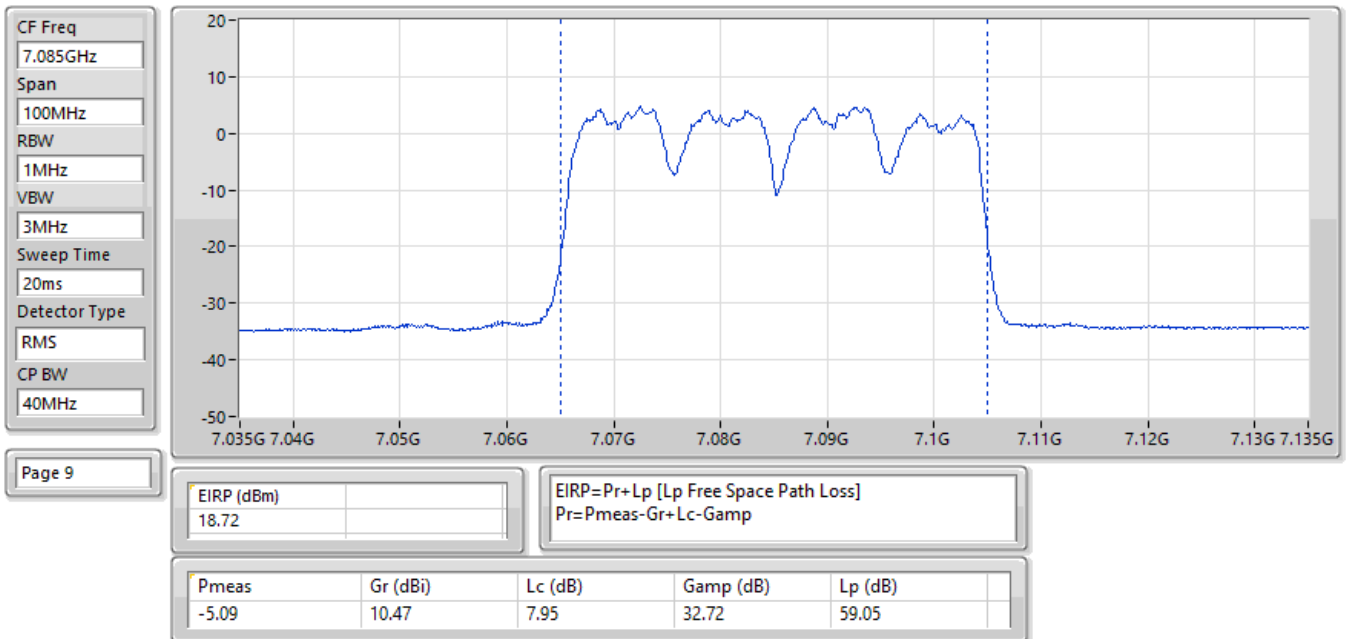


EIRP:Band:7.0G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6945MHz;TX

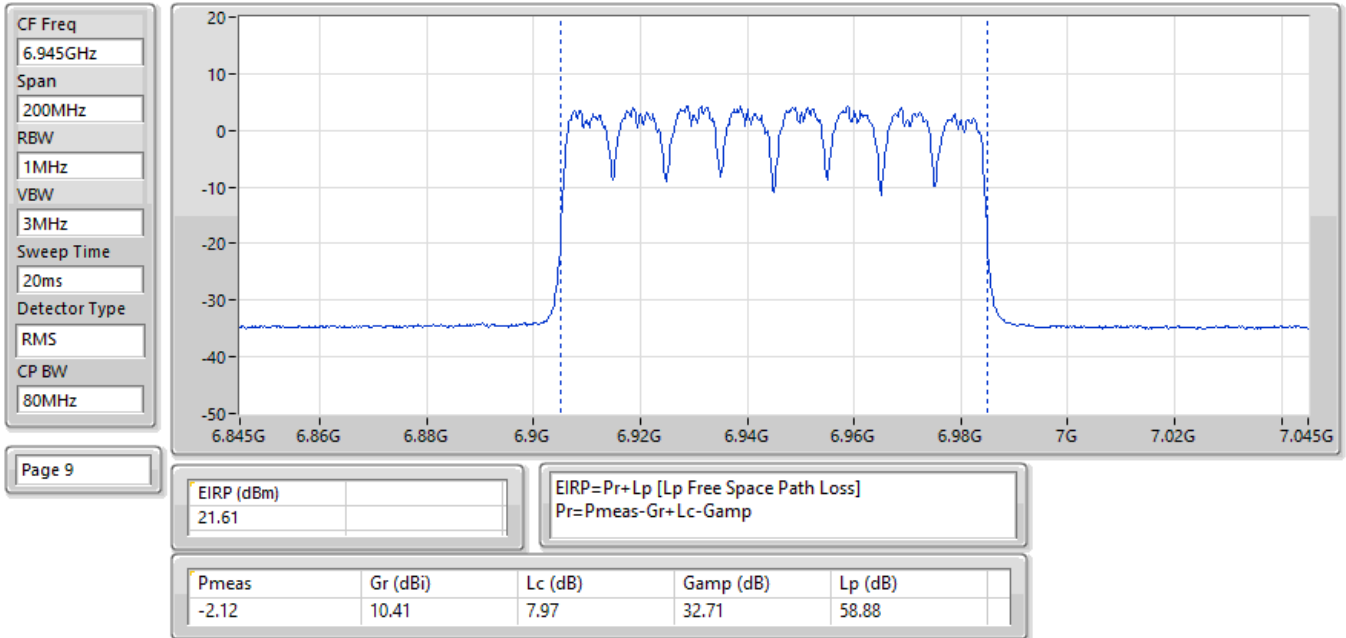

EIRP:Band:7.0G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:7025MHz;TX

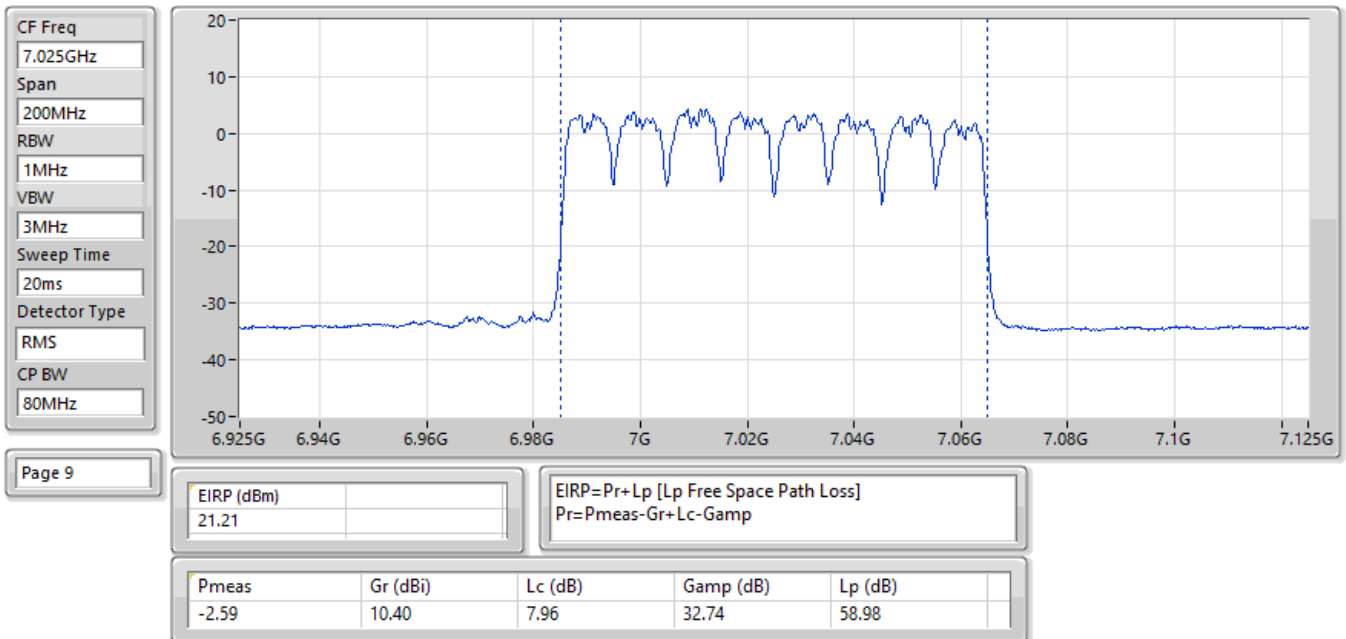

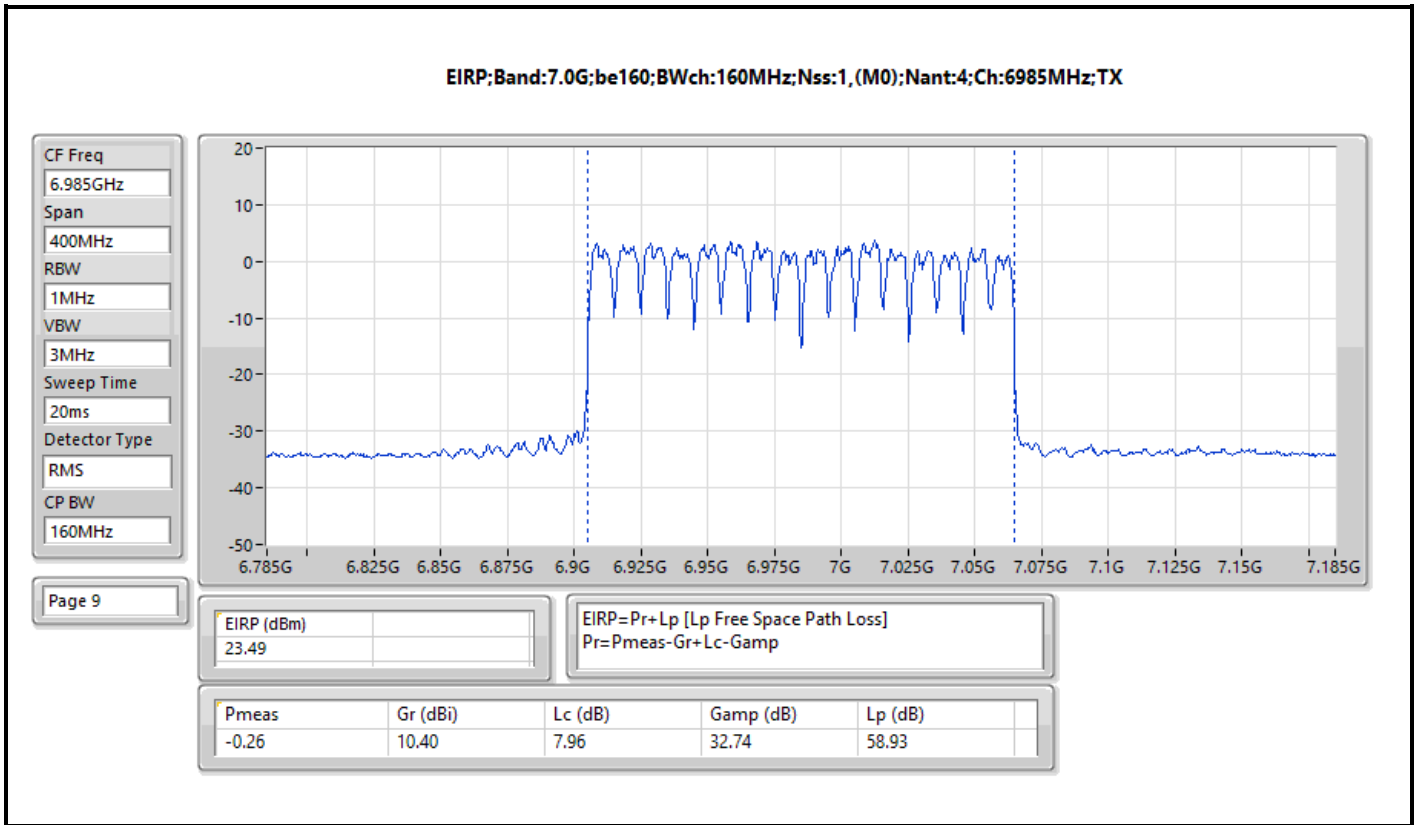



Test Mode: Mode 8

Summary

Mode	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	18.25	0.06683
802.11be EHT20-BF_Nss1,(MCS0)_4TX	17.36	0.05445
802.11be EHT20-BF_Nss1,(MCS0)_4TX	19.28	0.08472
802.11be EHT40-BF_Nss1,(MCS0)_4TX	20.64	0.11588
802.11be EHT40-BF_Nss1,(MCS0)_4TX	22.44	0.17539
802.11be EHT40-BF_Nss1,(MCS0)_4TX	21.28	0.13428
802.11be EHT80-BF_Nss1,(MCS0)_4TX	22.72	0.18707
802.11be EHT80-BF_Nss1,(MCS0)_4TX	23.77	0.23823
802.11be EHT80-BF_Nss1,(MCS0)_4TX	21.98	0.15776
802.11be EHT160-BF_Nss1,(MCS0)_4TX	24.22	0.26424
802.11be EHT160-BF_Nss1,(MCS0)_4TX	26.76	0.47424
802.11be EHT160-BF_Nss1,(MCS0)_4TX	24.48	0.28054
802.11be EHT320-BF_Nss1,(MCS0)_4TX	26.66	0.46345
802.11be EHT320-BF_Nss1,(MCS0)_4TX	27.46	0.55719
6.425-6.525GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	19.06	0.08054
802.11be EHT20-BF_Nss1,(MCS0)_4TX	18.30	0.06761
802.11be EHT20-BF_Nss1,(MCS0)_4TX	18.37	0.06871
802.11be EHT40-BF_Nss1,(MCS0)_4TX	19.71	0.09354
802.11be EHT40-BF_Nss1,(MCS0)_4TX	22.52	0.17865
802.11be EHT40-BF_Nss1,(MCS0)_4TX	21.67	0.14689
802.11be EHT80-BF_Nss1,(MCS0)_4TX	24.88	0.30761
802.11be EHT80-BF_Nss1,(MCS0)_4TX	25.11	0.32434
802.11be EHT160-BF_Nss1,(MCS0)_4TX	28.00	0.63096
802.11be EHT320-BF_Nss1,(MCS0)_4TX	28.78	0.75509
6.525-6.875GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	17.98	0.06281
802.11be EHT20-BF_Nss1,(MCS0)_4TX	18.44	0.06982
802.11be EHT20-BF_Nss1,(MCS0)_4TX	18.77	0.07534
802.11be EHT40-BF_Nss1,(MCS0)_4TX	21.63	0.14555
802.11be EHT40-BF_Nss1,(MCS0)_4TX	21.30	0.13490
802.11be EHT40-BF_Nss1,(MCS0)_4TX	20.76	0.11912
802.11be EHT80-BF_Nss1,(MCS0)_4TX	24.52	0.28314
802.11be EHT80-BF_Nss1,(MCS0)_4TX	25.21	0.33189
802.11be EHT80-BF_Nss1,(MCS0)_4TX	23.80	0.23988
802.11be EHT80-BF_Nss1,(MCS0)_4TX	25.09	0.32285
802.11be EHT160-BF_Nss1,(MCS0)_4TX	28.19	0.65917
802.11be EHT160-BF_Nss1,(MCS0)_4TX	26.97	0.49774
802.11be EHT320-BF_Nss1,(MCS0)_4TX	27.92	0.61944
802.11be EHT320-BF_Nss1,(MCS0)_4TX	21.03	0.12677
6.875-7.125GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	18.32	0.06792
802.11be EHT20-BF_Nss1,(MCS0)_4TX	17.86	0.06109
802.11be EHT20-BF_Nss1,(MCS0)_4TX	17.55	0.05689
802.11be EHT40-BF_Nss1,(MCS0)_4TX	21.40	0.13804
802.11be EHT40-BF_Nss1,(MCS0)_4TX	19.67	0.09268
802.11be EHT40-BF_Nss1,(MCS0)_4TX	20.54	0.11324
802.11be EHT80-BF_Nss1,(MCS0)_4TX	23.94	0.24774
802.11be EHT80-BF_Nss1,(MCS0)_4TX	23.46	0.22182
802.11be EHT160-BF_Nss1,(MCS0)_4TX	27.09	0.51168

Result


Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-
5955MHz	Pass	18.25	30.00
6195MHz	Pass	17.36	30.00
6415MHz	Pass	19.28	30.00
6435MHz	Pass	19.06	30.00
6475MHz	Pass	18.30	30.00
6515MHz	Pass	18.37	30.00
6535MHz	Pass	17.98	30.00
6695MHz	Pass	18.44	30.00
6875MHz	Pass	18.77	30.00
6895MHz	Pass	18.32	30.00
6995MHz	Pass	17.86	30.00
7095MHz	Pass	17.55	30.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-
5965MHz	Pass	20.64	30.00
6205MHz	Pass	22.44	30.00
6405MHz	Pass	21.28	30.00
6445MHz	Pass	19.71	30.00
6485MHz	Pass	22.52	30.00
6525MHz	Pass	21.67	30.00
6565MHz	Pass	21.63	30.00
6685MHz	Pass	21.30	30.00
6885MHz	Pass	20.76	30.00
6925MHz	Pass	21.40	30.00
7005MHz	Pass	19.67	30.00
7085MHz	Pass	20.54	30.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-
5985MHz	Pass	22.72	30.00
6225MHz	Pass	23.77	30.00
6385MHz	Pass	21.98	30.00
6465MHz	Pass	24.88	30.00
6545MHz	Pass	25.11	30.00
6625MHz	Pass	24.52	30.00
6705MHz	Pass	25.21	30.00
6785MHz	Pass	23.80	30.00
6865MHz	Pass	25.09	30.00
6945MHz	Pass	23.94	30.00
7025MHz	Pass	23.46	30.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-
6025MHz	Pass	24.22	30.00
6185MHz	Pass	26.76	30.00
6345MHz	Pass	24.48	30.00
6505MHz	Pass	28.00	30.00
6665MHz	Pass	28.19	30.00
6825MHz	Pass	26.97	30.00
6985MHz	Pass	27.09	30.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-
6105MHz	Pass	26.66	30.00
6265MHz	Pass	27.46	30.00
6585MHz	Pass	28.78	30.00
6745MHz	Pass	27.92	30.00
6905MHz	Pass	21.03	30.00

DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.

08/02/2025

EIRP;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:5955MHz;TX

CF Freq
5.955GHz
Span
50MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
20MHz

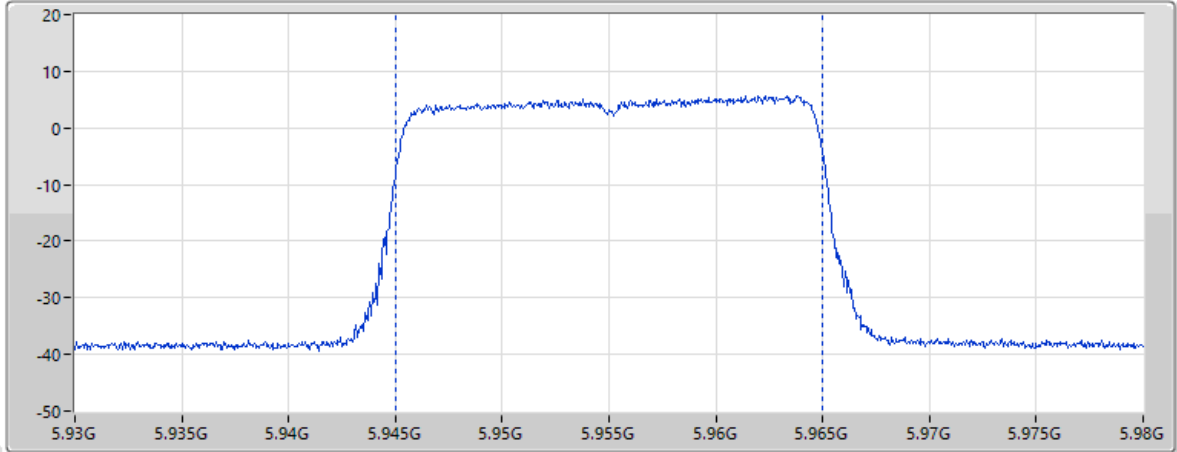


Page 10

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
18.25				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
1.19	13.30	7.45	34.63	57.54

08/02/2025

EIRP;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6195MHz;TX

CF Freq
6.195GHz
Span
50MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS
CP BW
20MHz

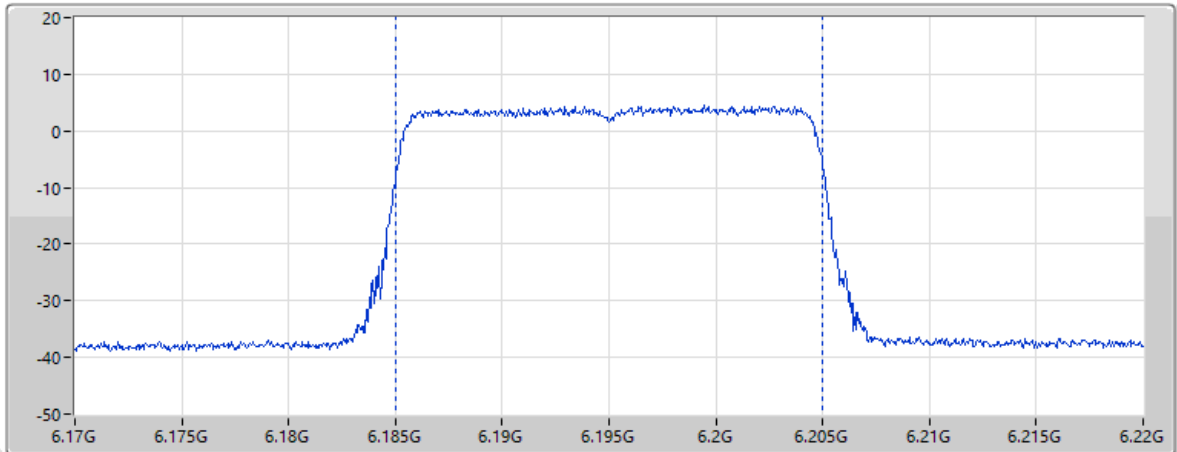


Page 10

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
17.36				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-0.45	13.21	7.63	34.49	57.88


08/02/2025

EIRP:Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6415MHz;TX

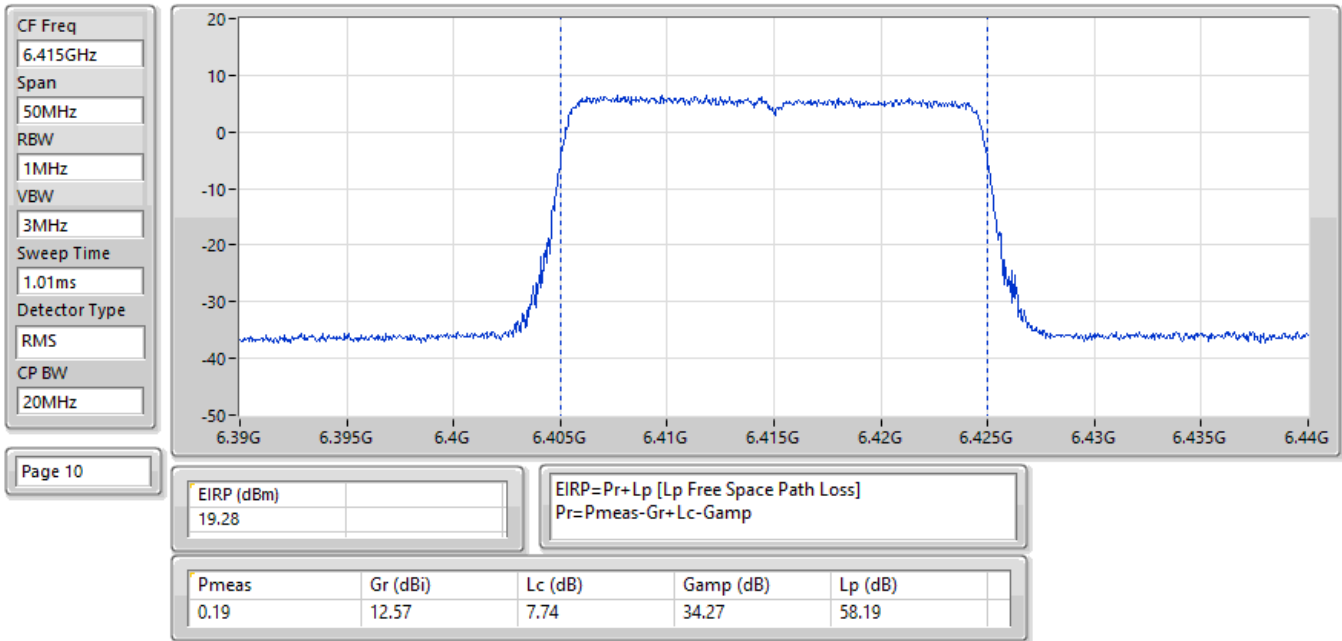


08/02/2025

EIRP:Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:5965MHz;TX

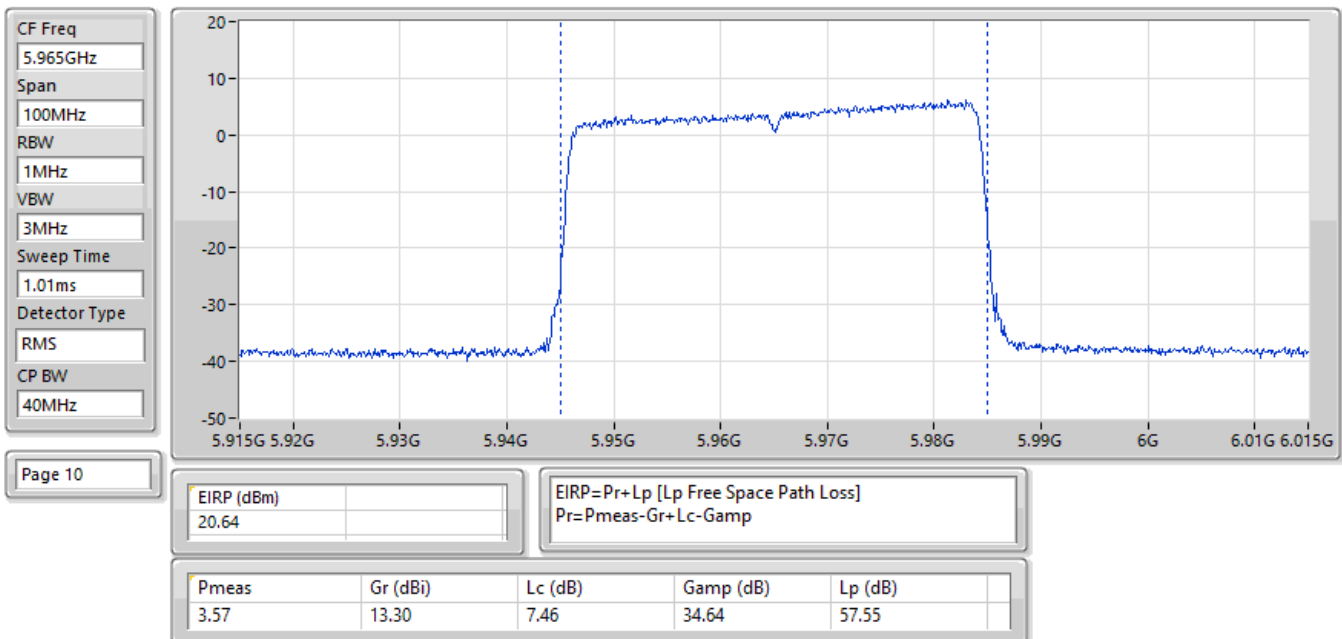


08/02/2025

EIRP:Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6205MHz;TX

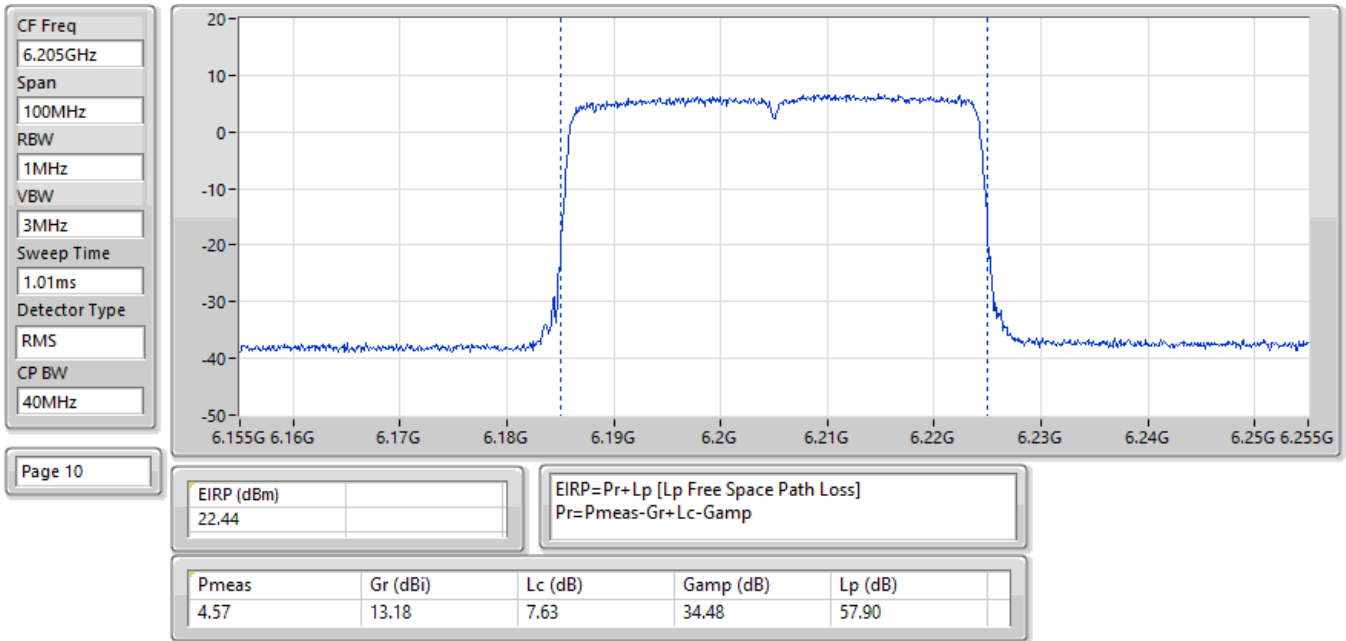


08/02/2025

EIRP:Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6405MHz;TX

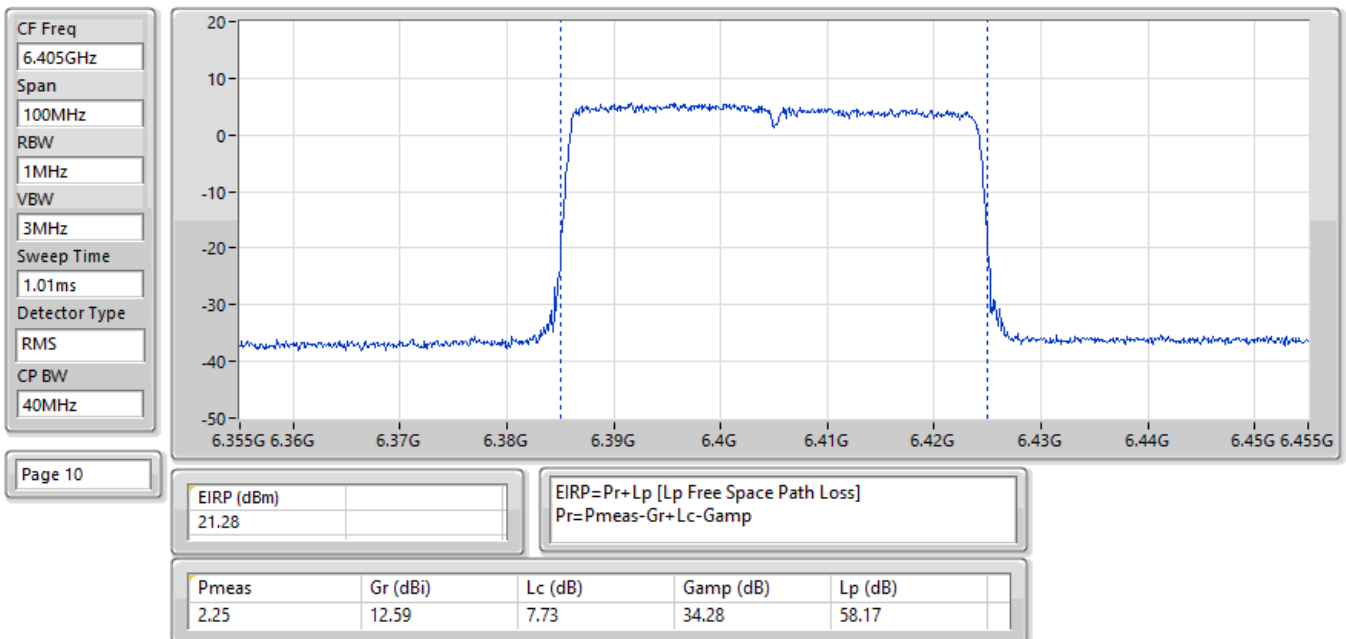


08/02/2025

EIRP:Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:5985MHz;TX

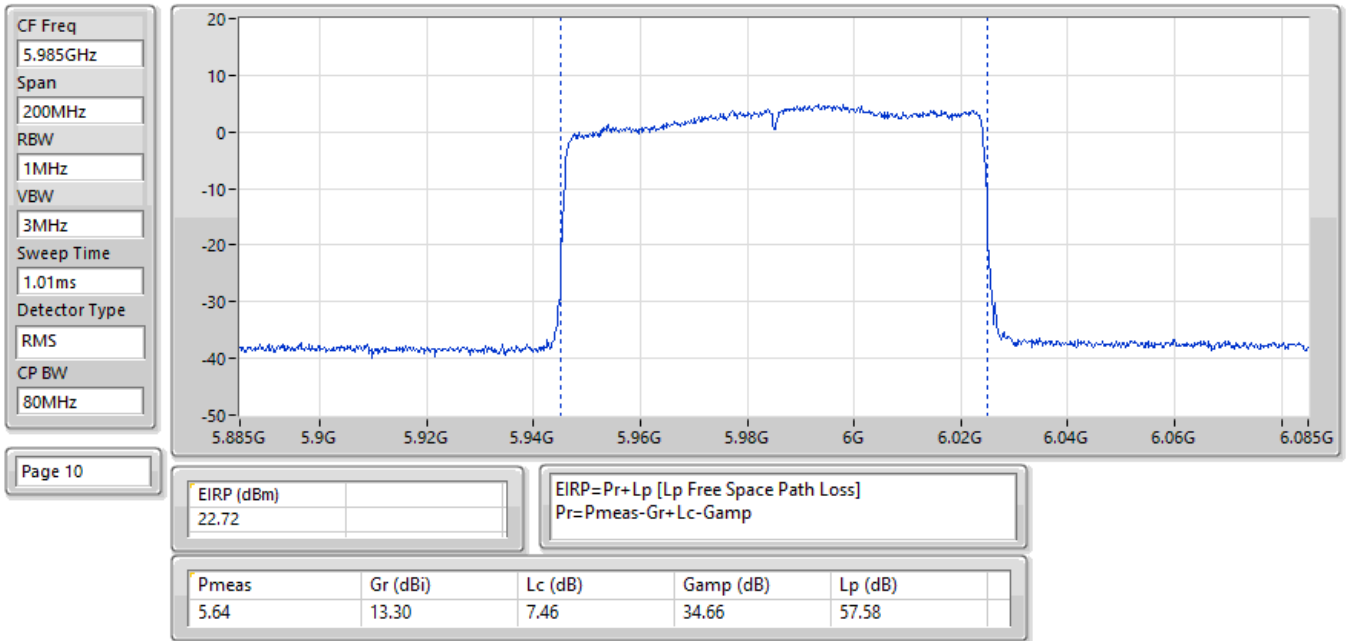


08/02/2025

EIRP:Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6225MHz;TX

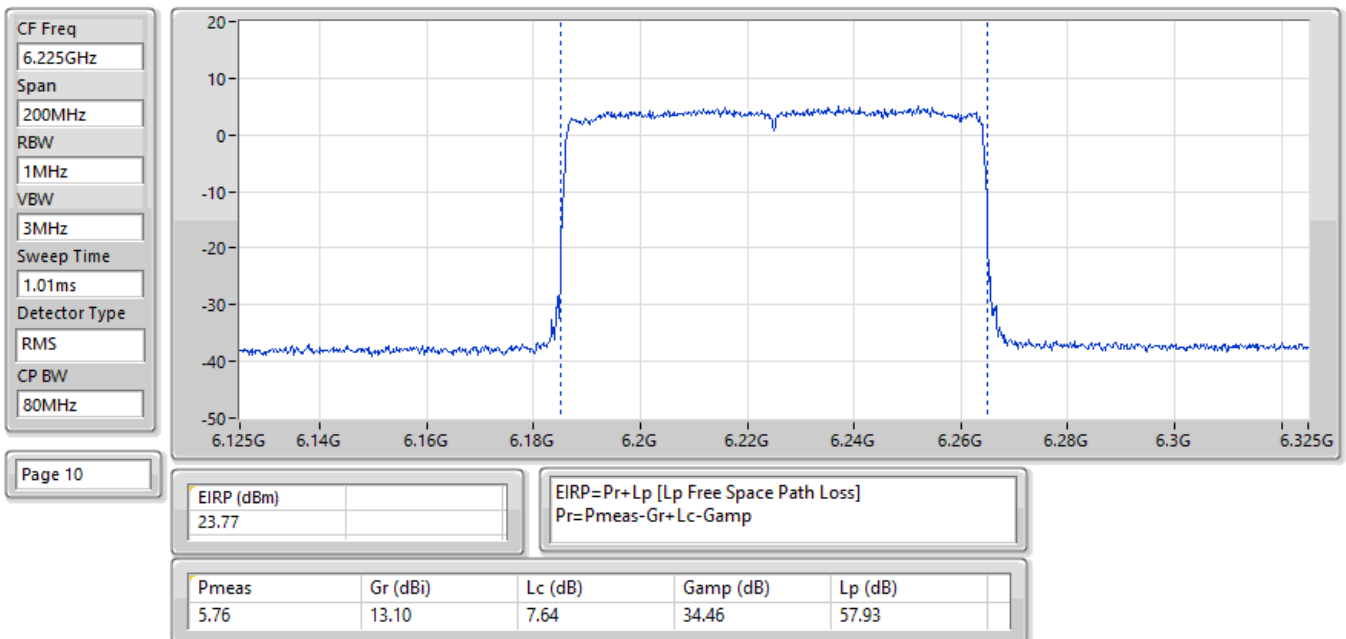


08/02/2025

EIRP;Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6385MHz;TX

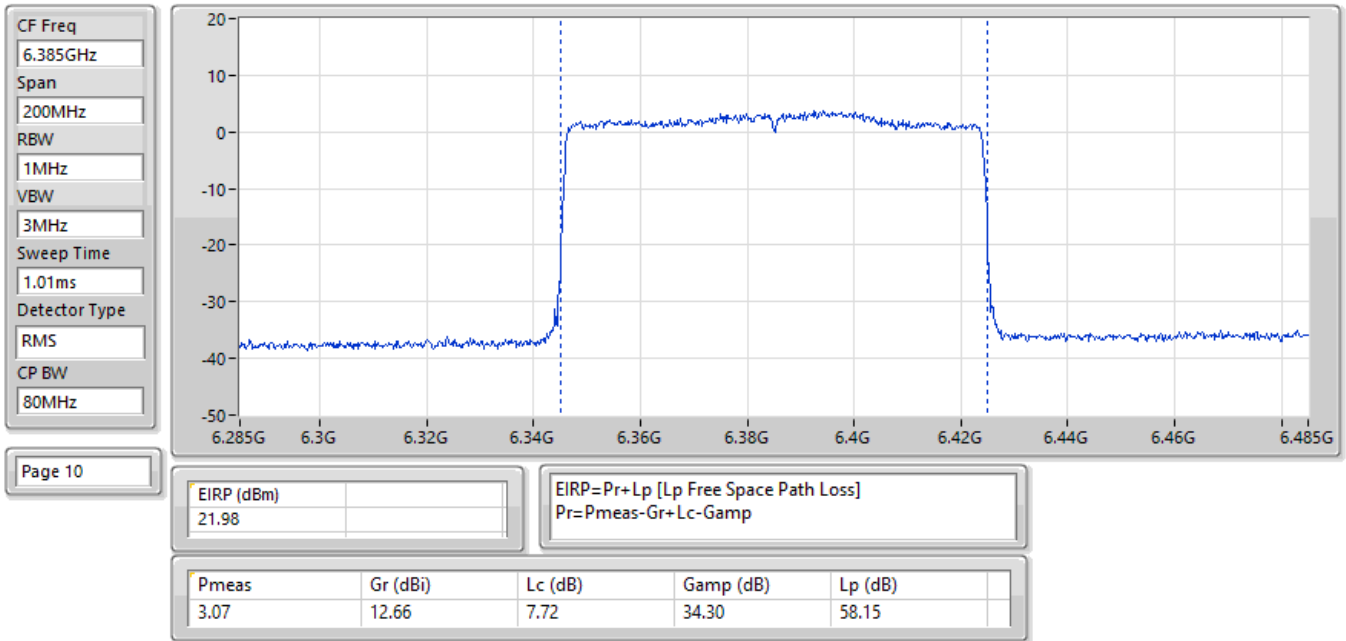


08/02/2025

EIRP;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6025MHz;TX

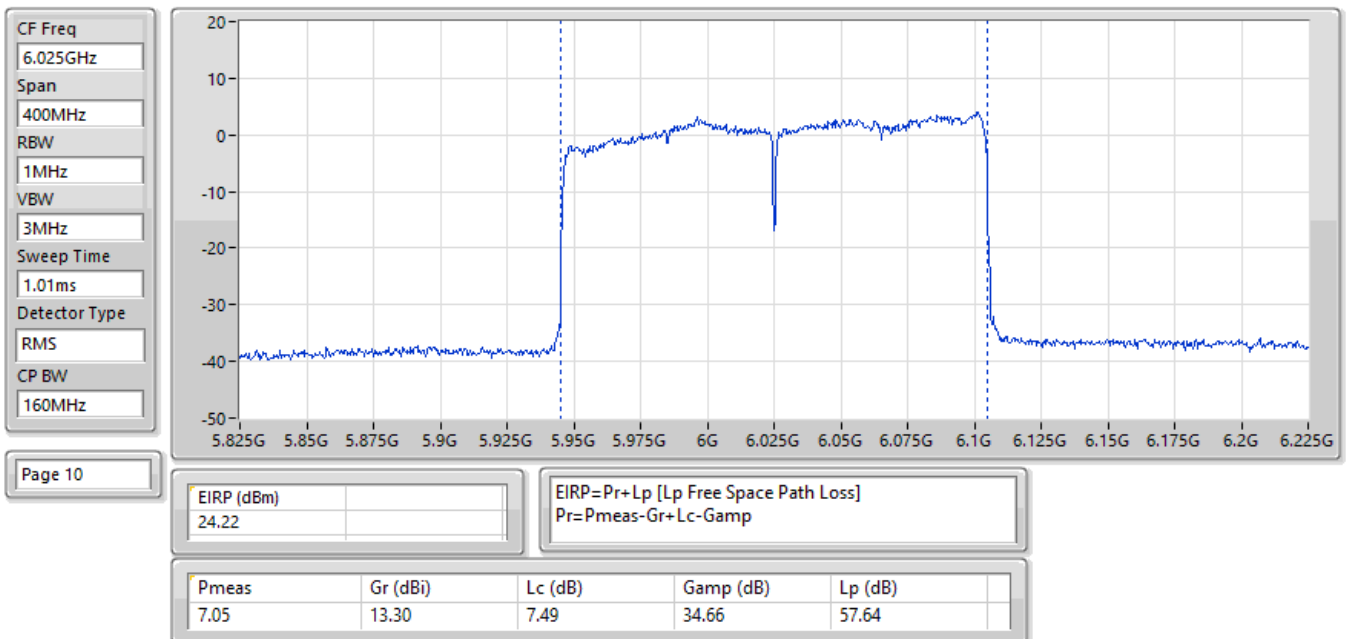


08/02/2025

EIRP;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6185MHz;TX

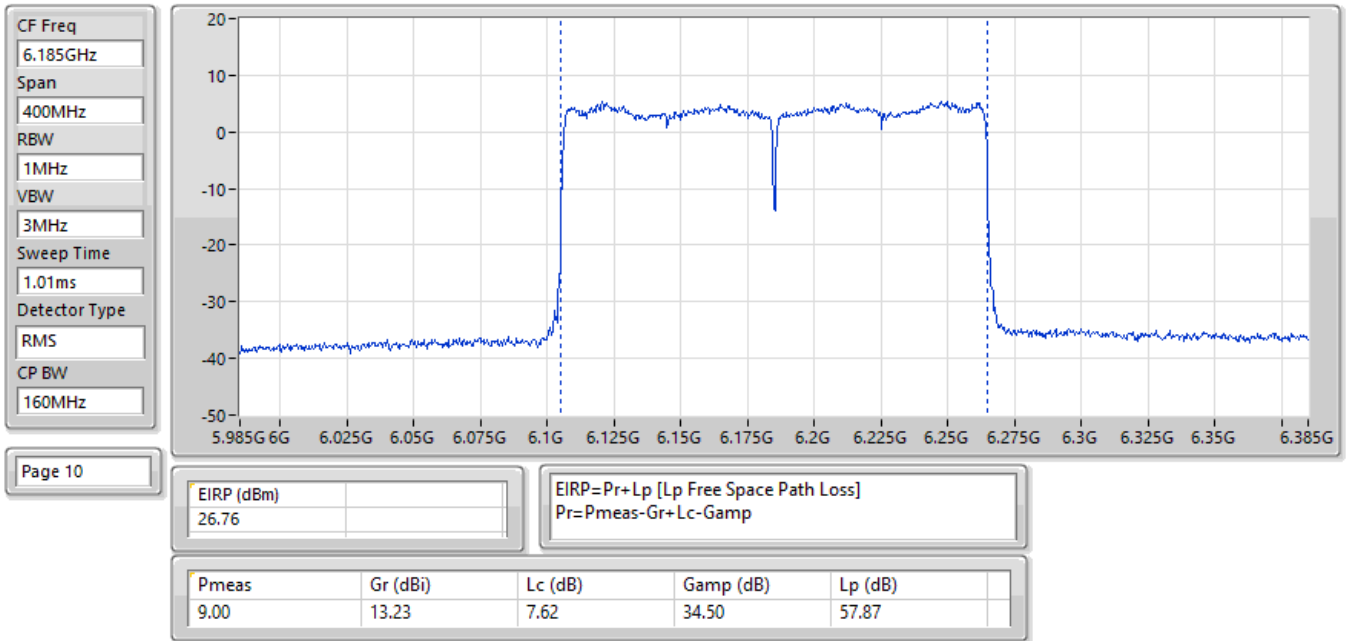

08/02/2025

EIRP;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6345MHz;TX

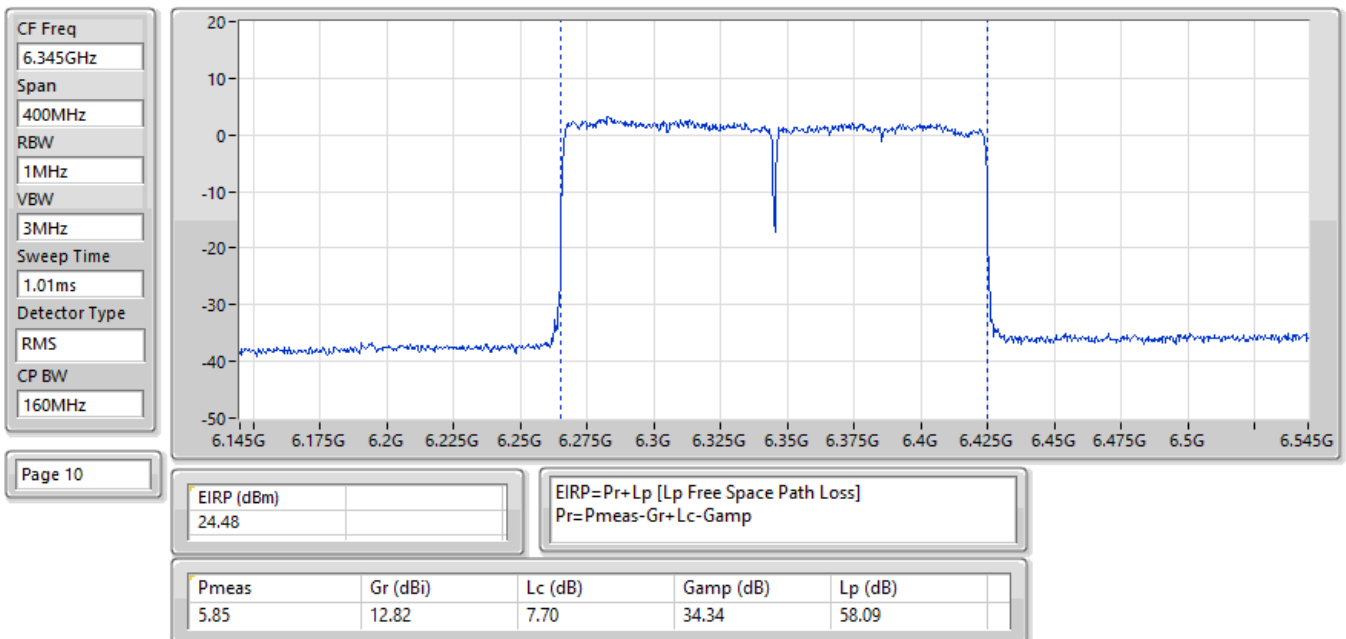

10/02/2025

EIRP;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6105MHz;TX

CF Freq
6.105GHz

Span
800MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.57ms

Detector Type
RMS

CP BW
320MHz

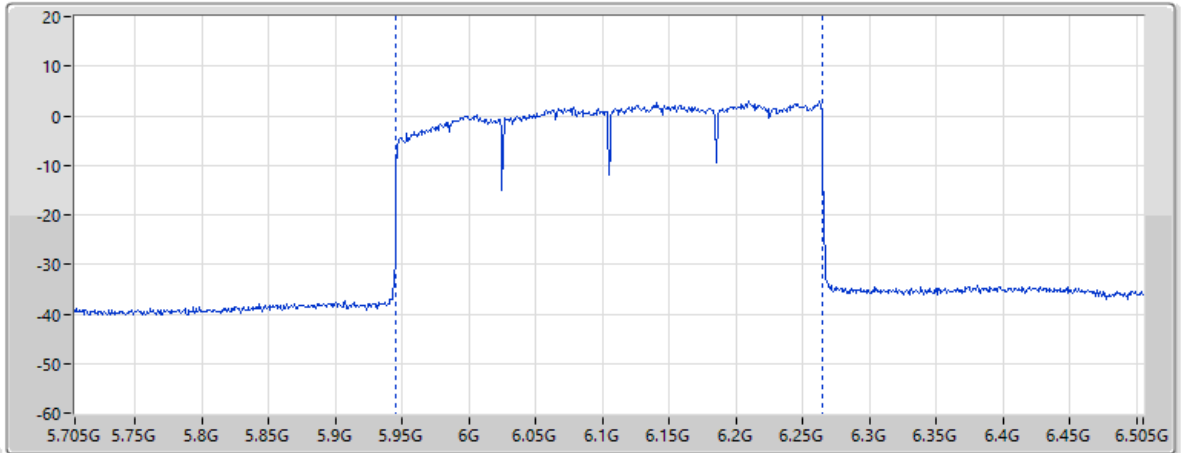

Page 10

EIRP (dBm)
26.66

EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
9.32	13.39	7.55	34.58	57.76

10/02/2025

EIRP;Band:6.2G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6265MHz;TX

CF Freq
6.265GHz

Span
800MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.57ms

Detector Type
RMS

CP BW
320MHz

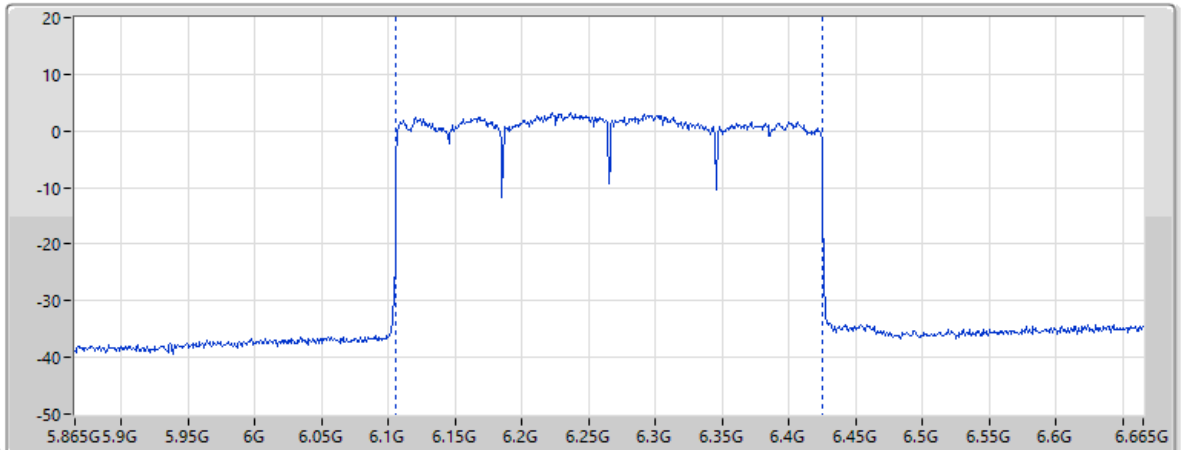

Page 10


EIRP (dBm)
27.46

EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
9.24	13.00	7.66	34.42	57.98


08/02/2025

EIRP:Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6435MHz;TX

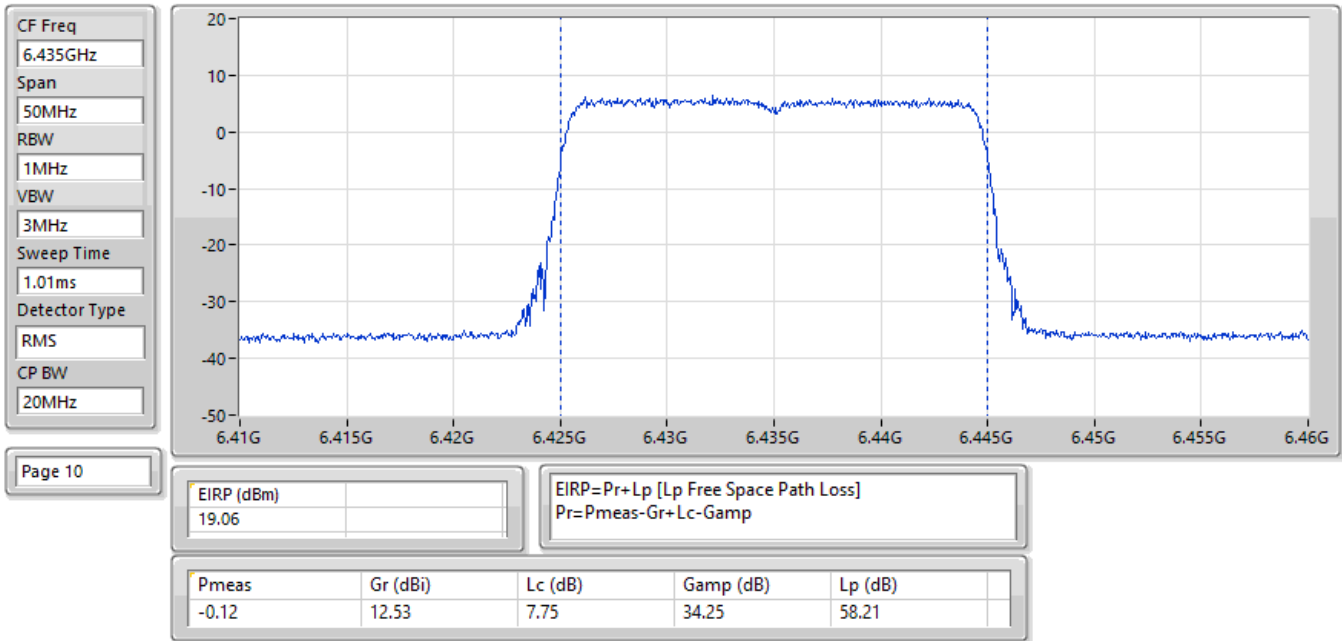


08/02/2025

EIRP:Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6475MHz;TX

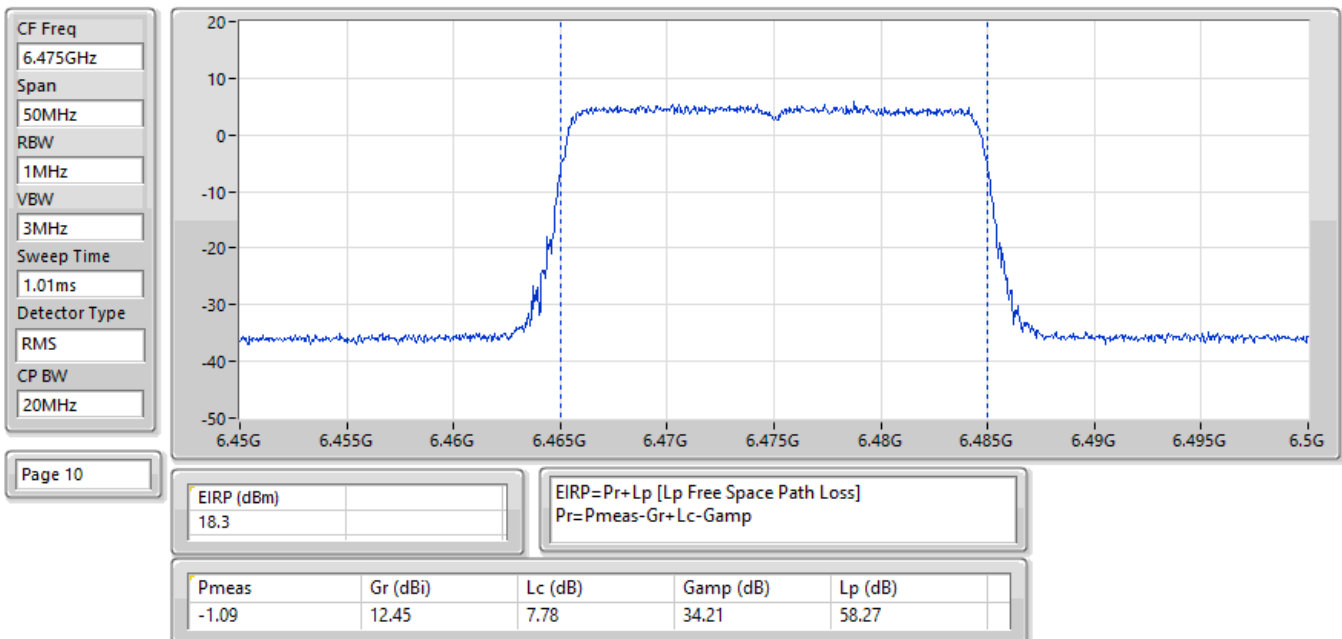


08/02/2025

EIRP:Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6515MHz;TX

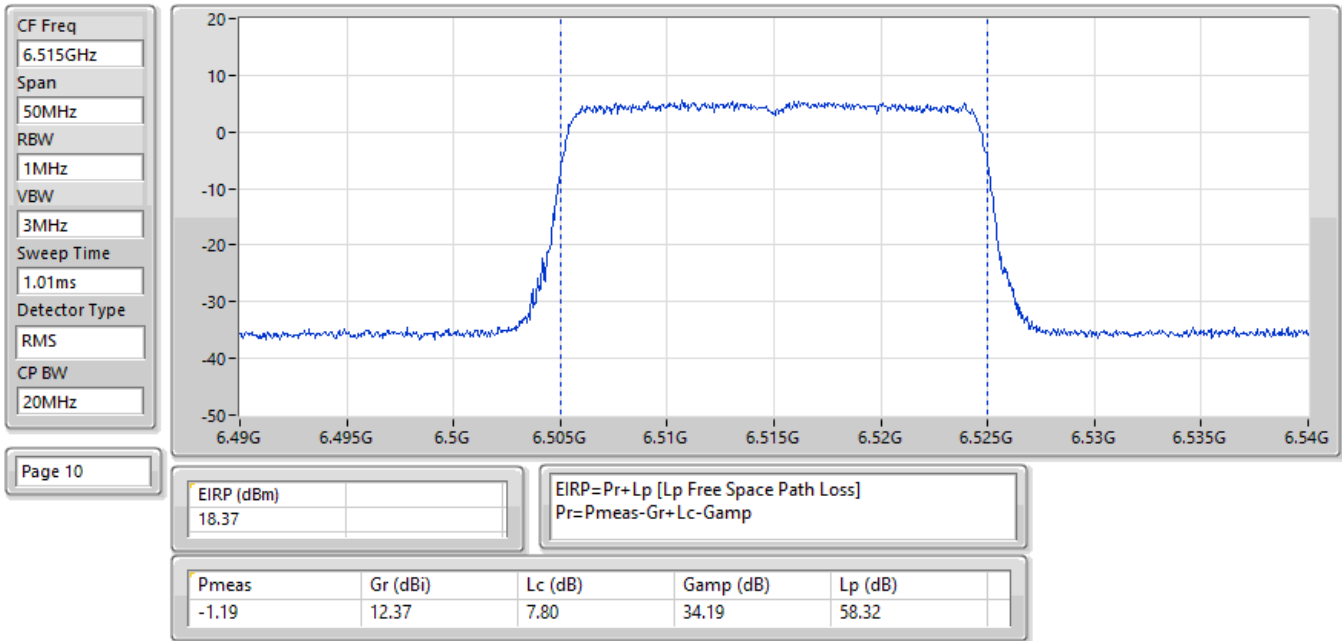


08/02/2025

EIRP:Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6445MHz;TX

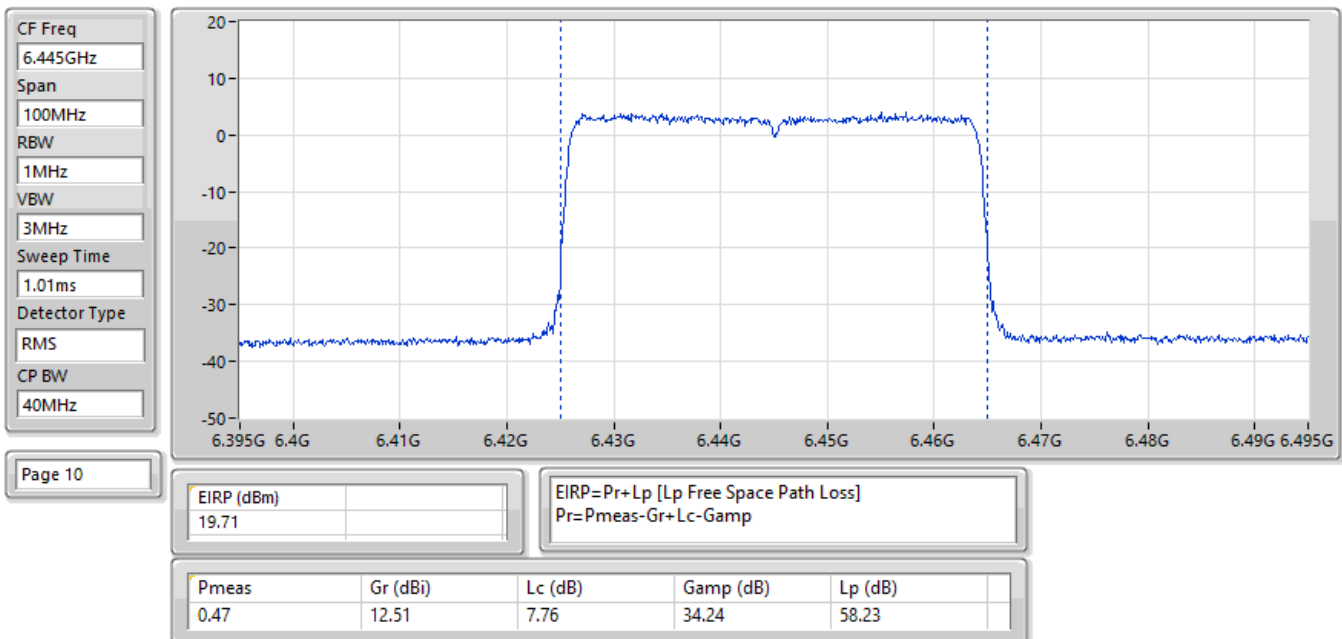


08/02/2025

EIRP:Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6485MHz;TX

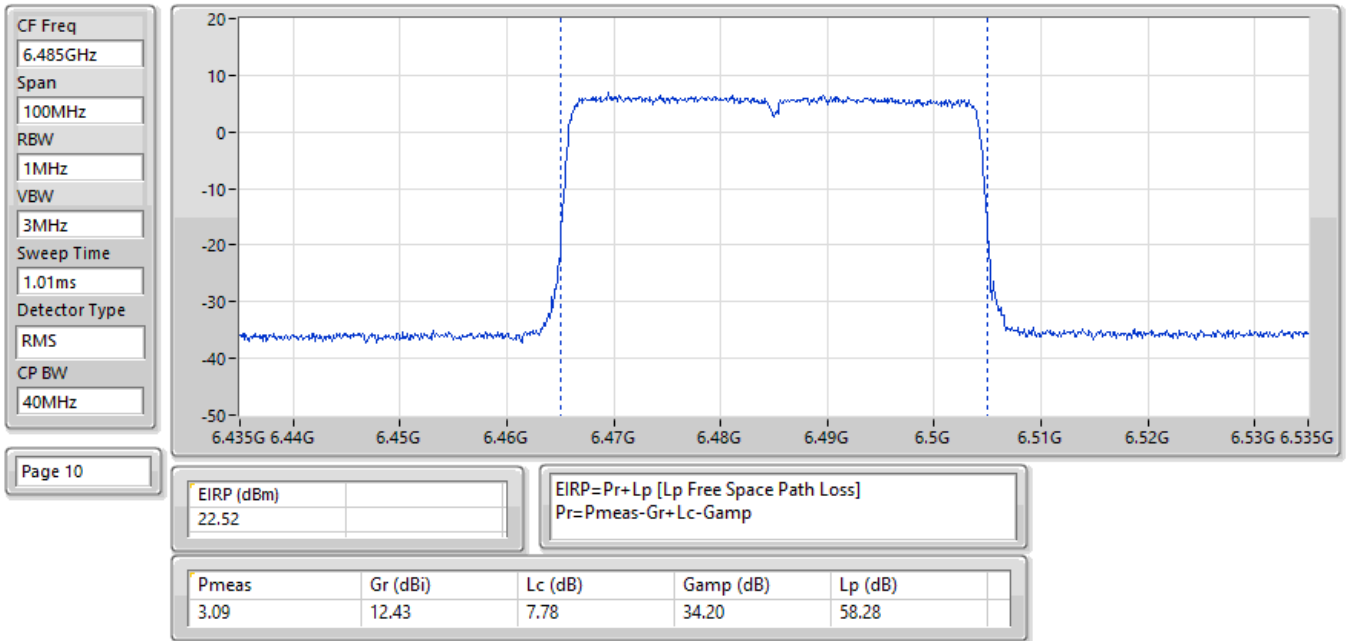


08/02/2025

EIRP:Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6525MHz;TX

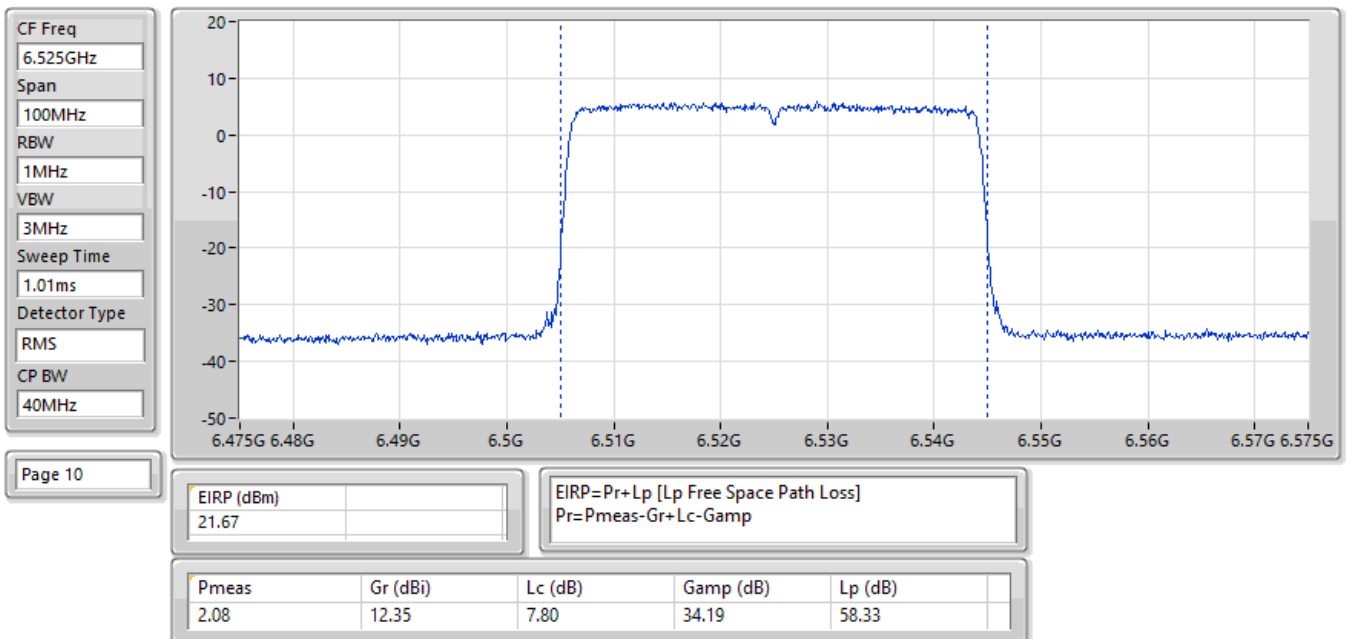


08/02/2025

EIRP:Band:6.4G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6465MHz;TX

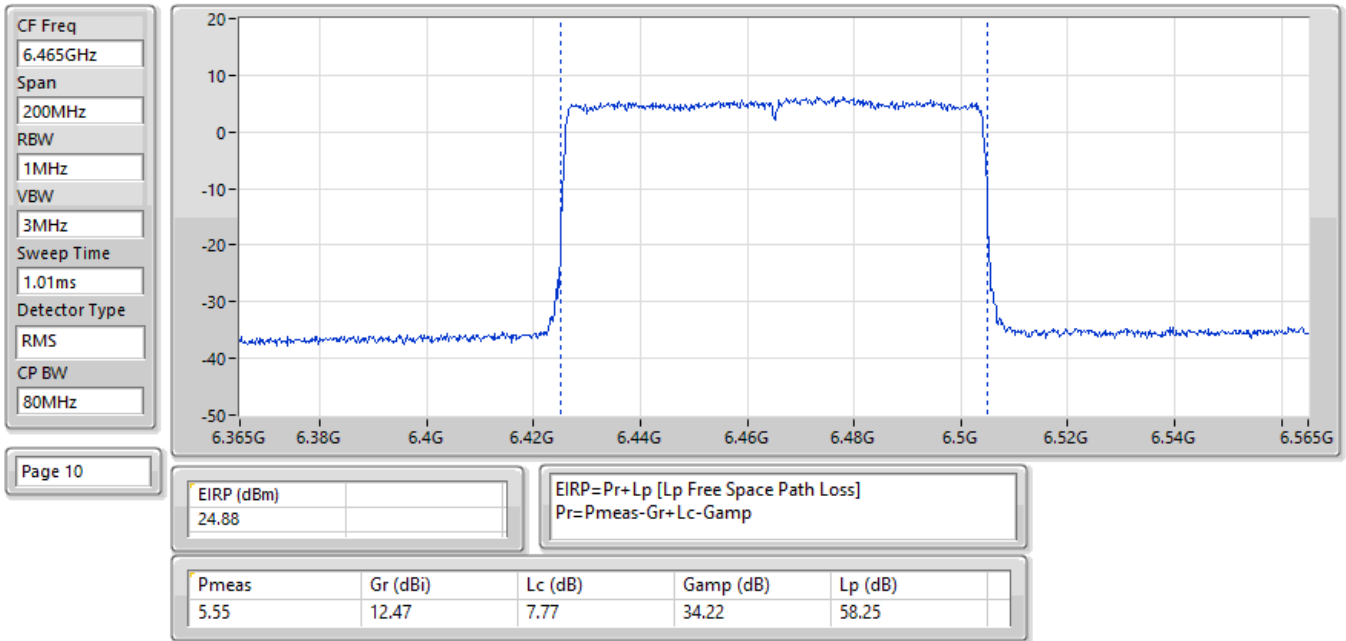


08/02/2025

EIRP:Band:6.4G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6545MHz;TX

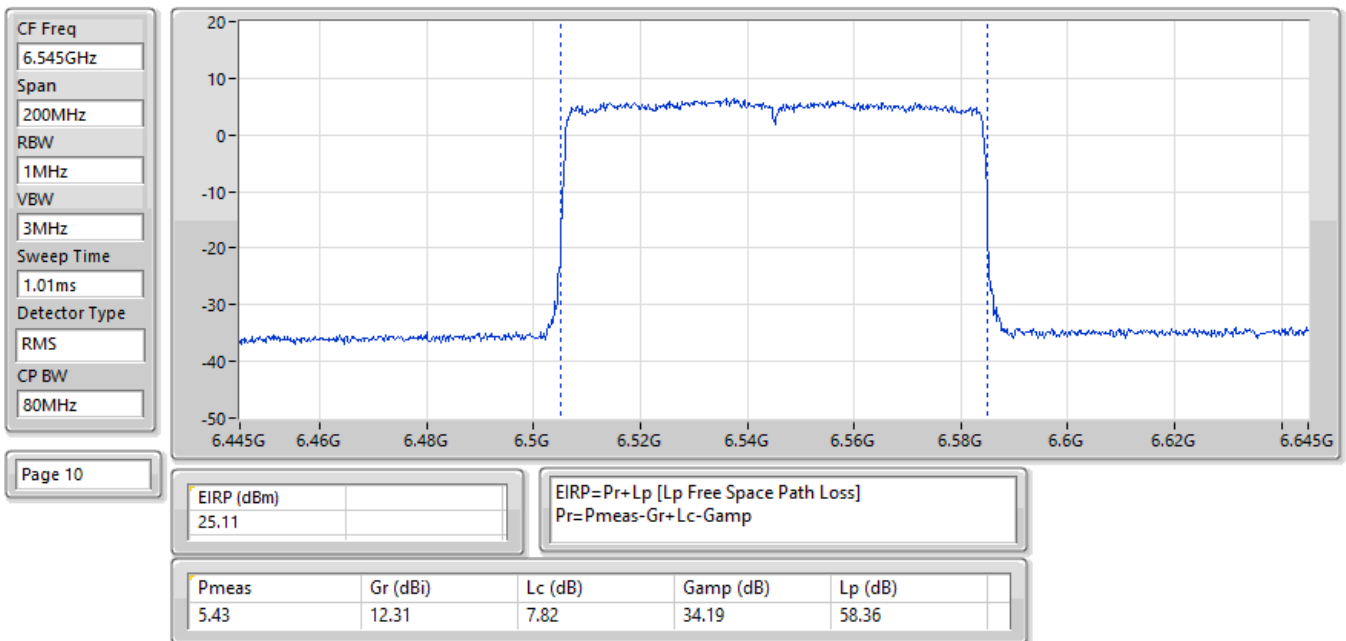


08/02/2025

EIRP;Band:6.4G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6505MHz;TX

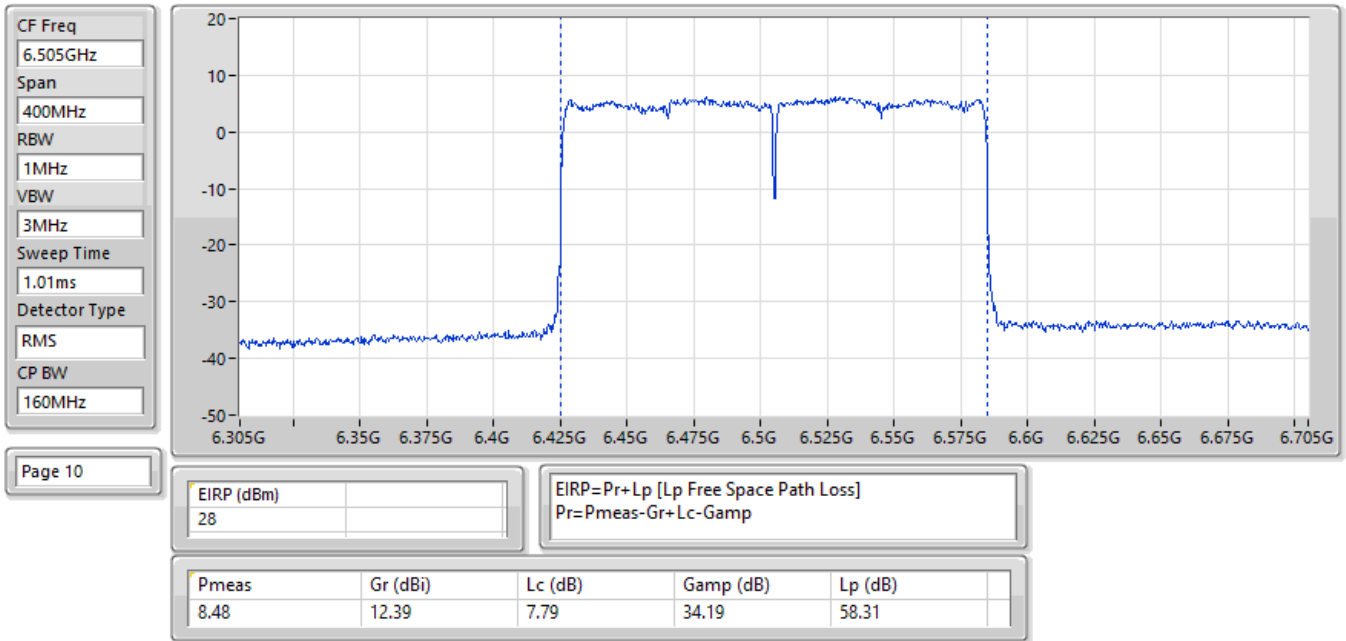


10/02/2025

EIRP;Band:6.4G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6585MHz;TX

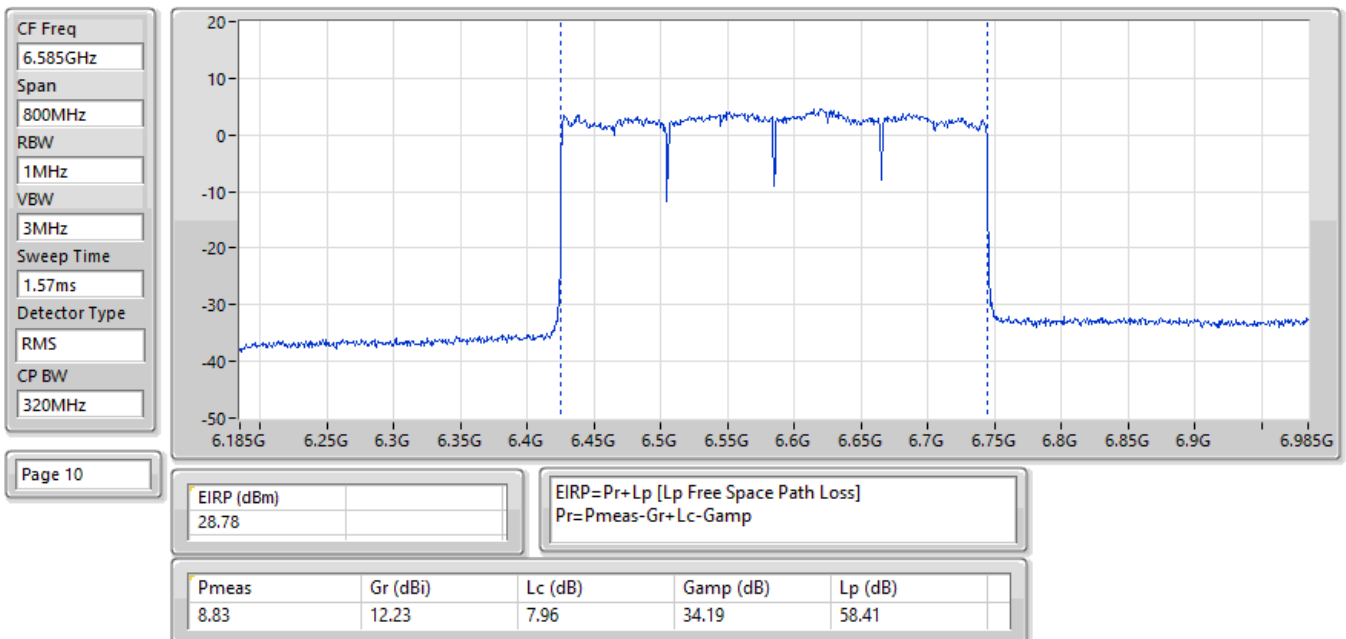


08/02/2025

EIRP:Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6535MHz;TX

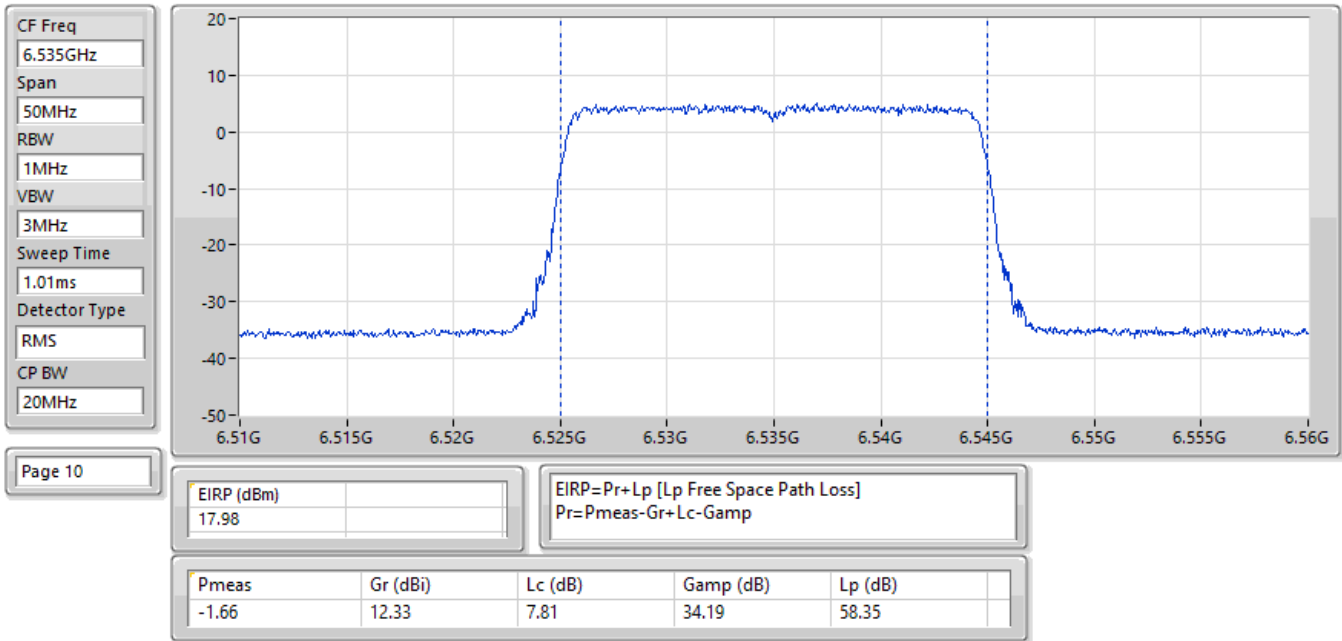


08/02/2025

EIRP:Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6695MHz;TX

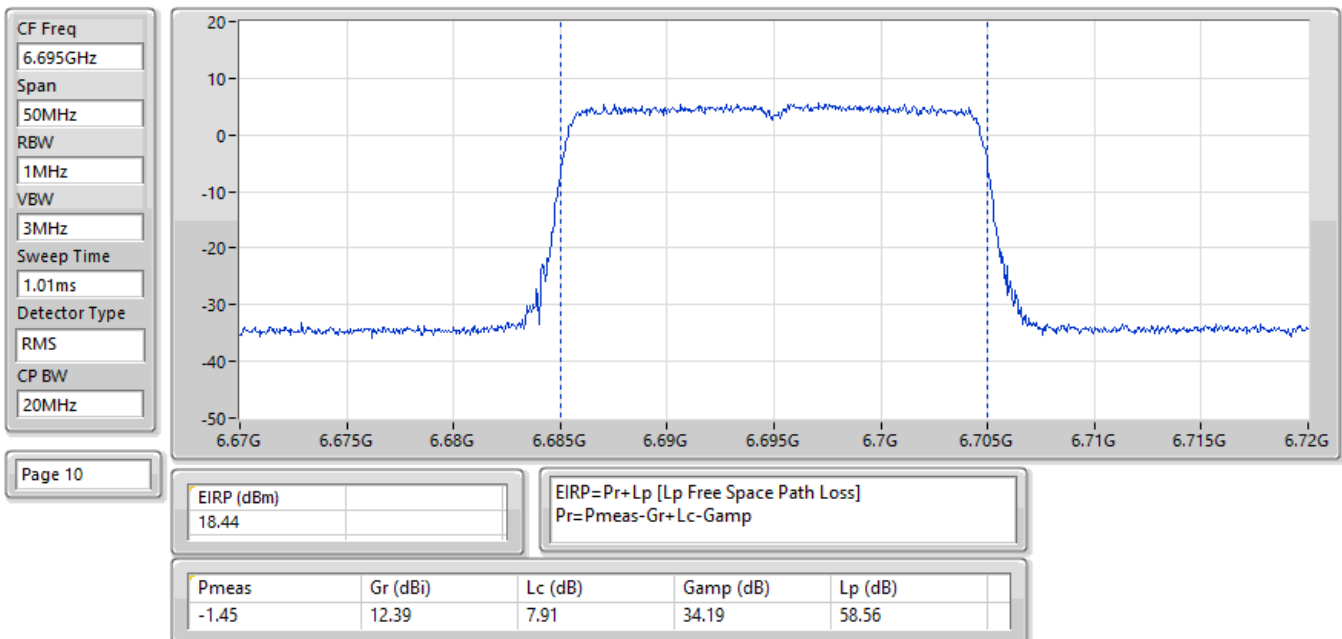


08/02/2025

EIRP:Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6875MHz;TX

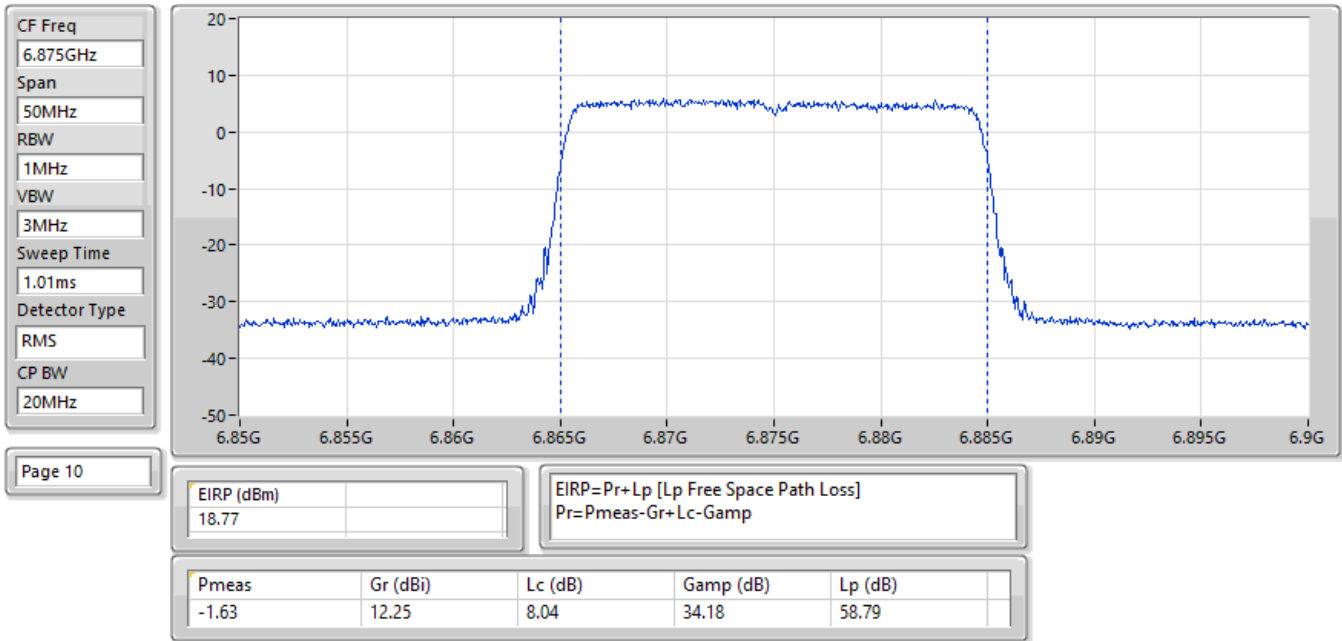


08/02/2025

EIRP:Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6565MHz;TX

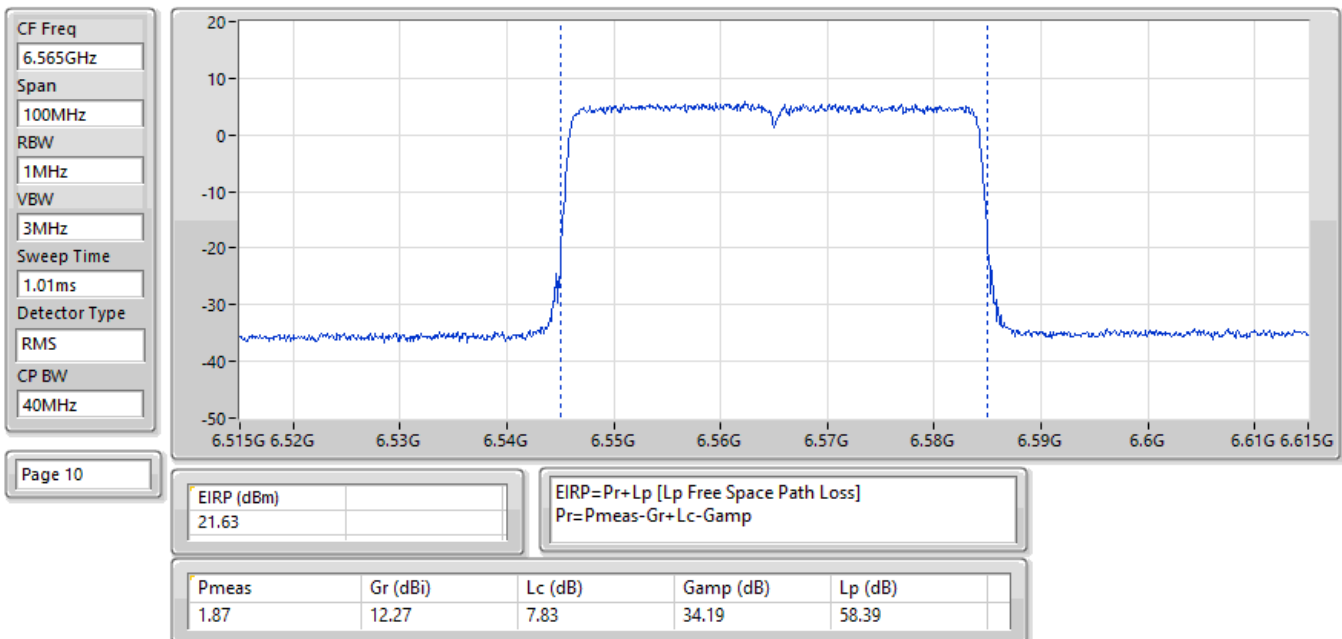


08/02/2025

EIRP:Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6685MHz;TX

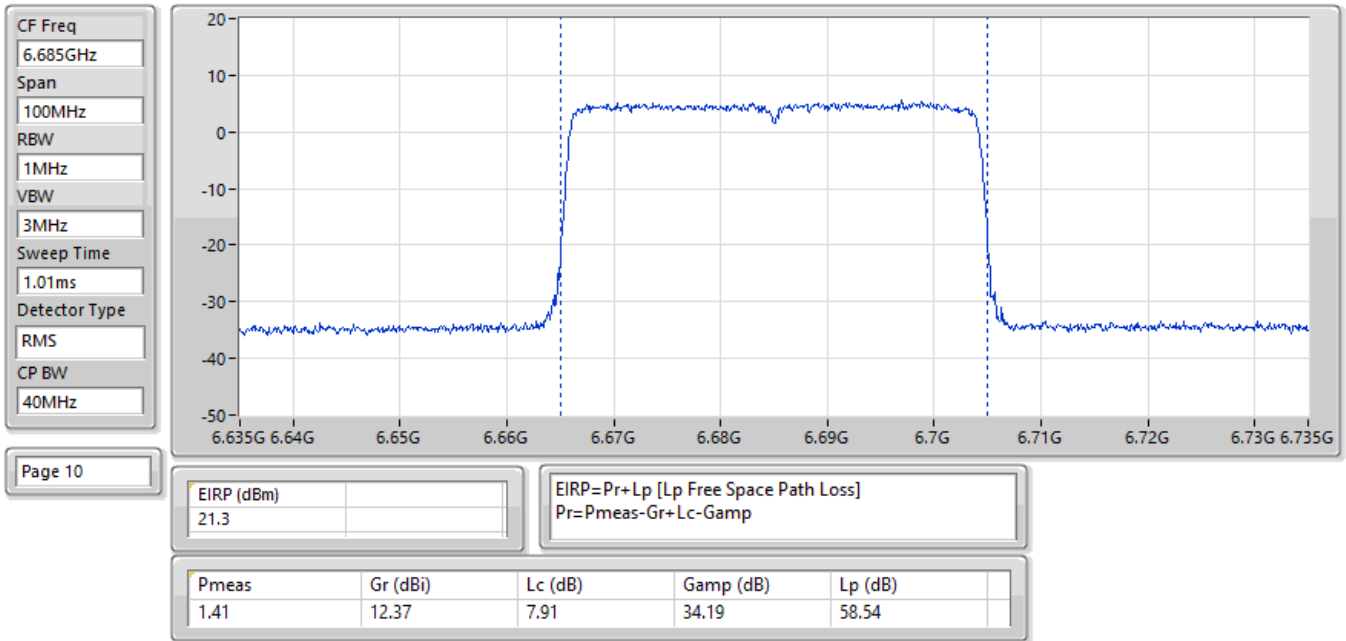


08/02/2025

EIRP:Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6885MHz;TX

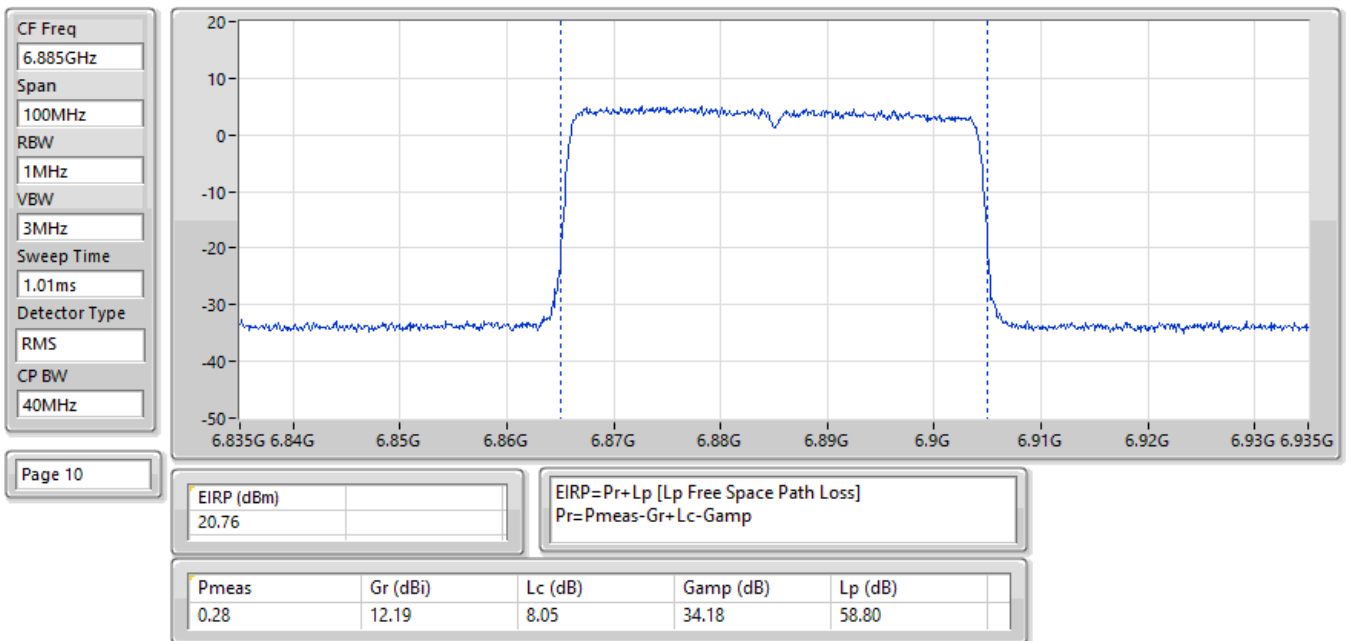


08/02/2025

EIRP:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6625MHz;TX

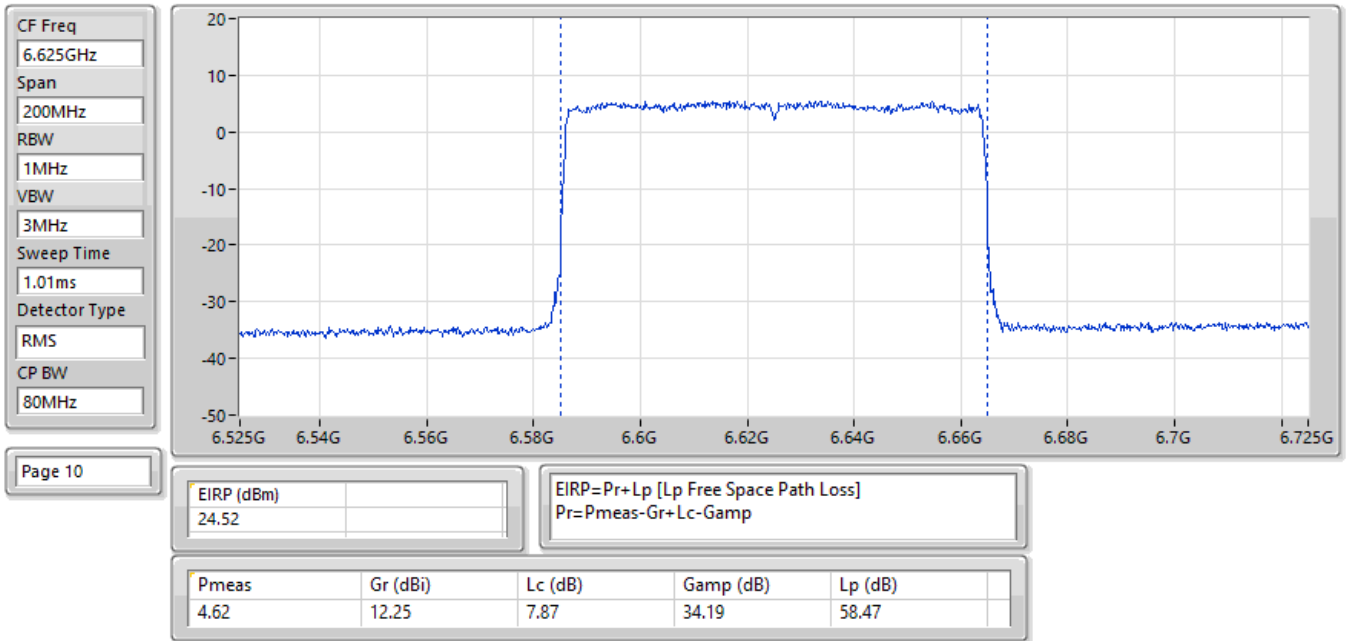


08/02/2025

EIRP:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6705MHz;TX

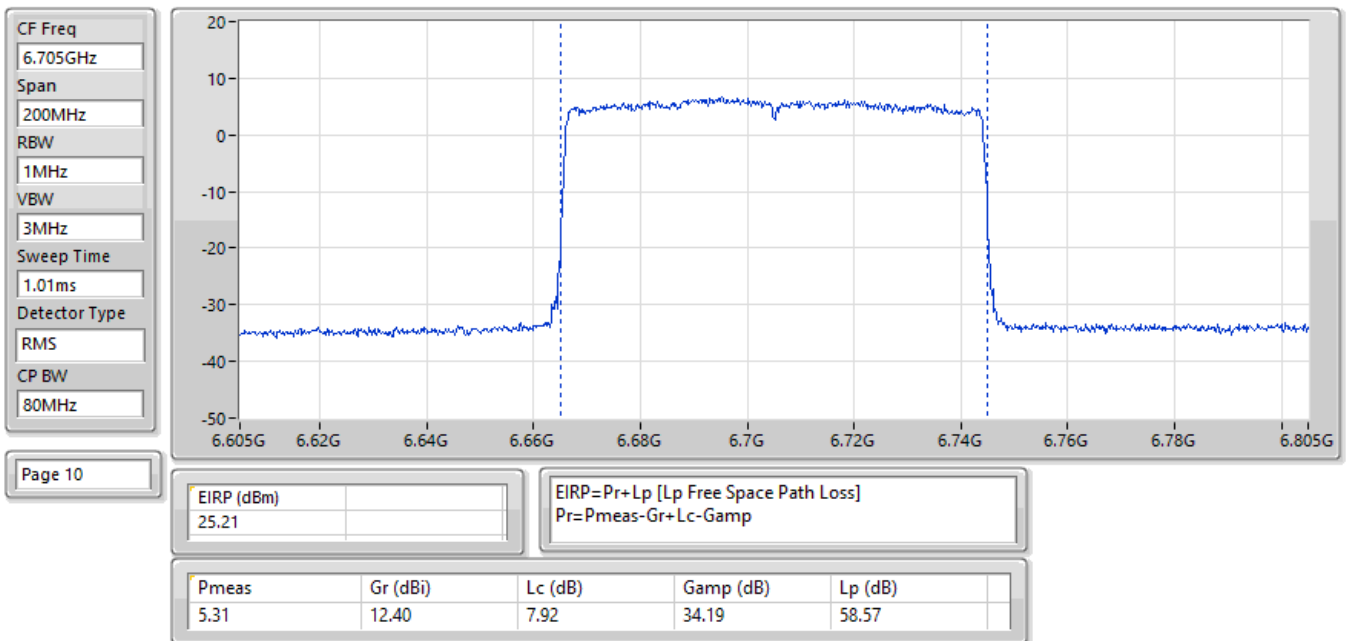


08/02/2025

EIRP:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6785MHz;TX

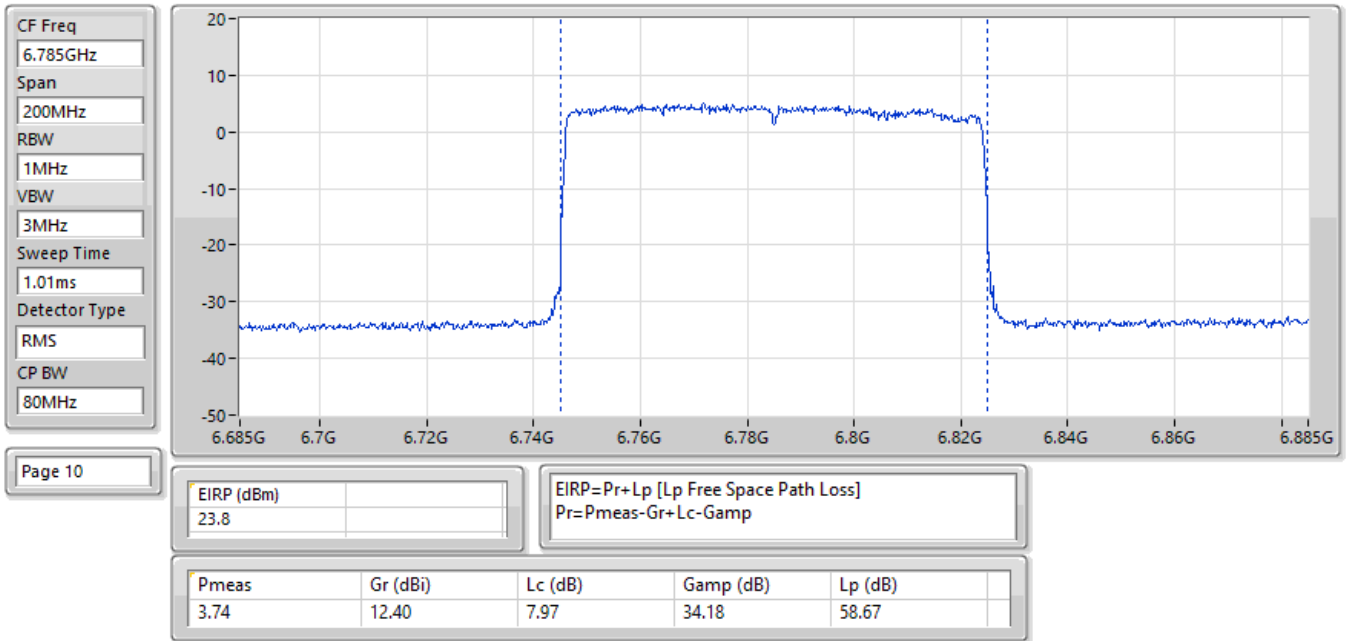


08/02/2025

EIRP:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6865MHz;TX

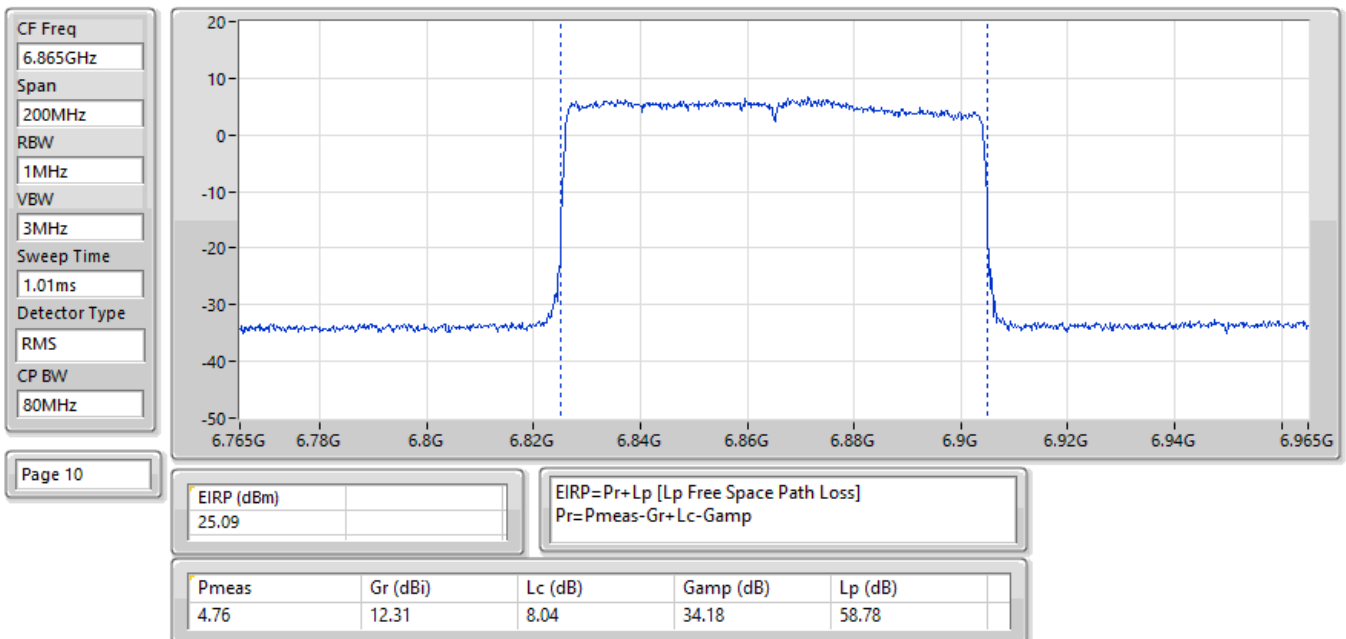


08/02/2025

EIRP;Band:6.7G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6665MHz;TX

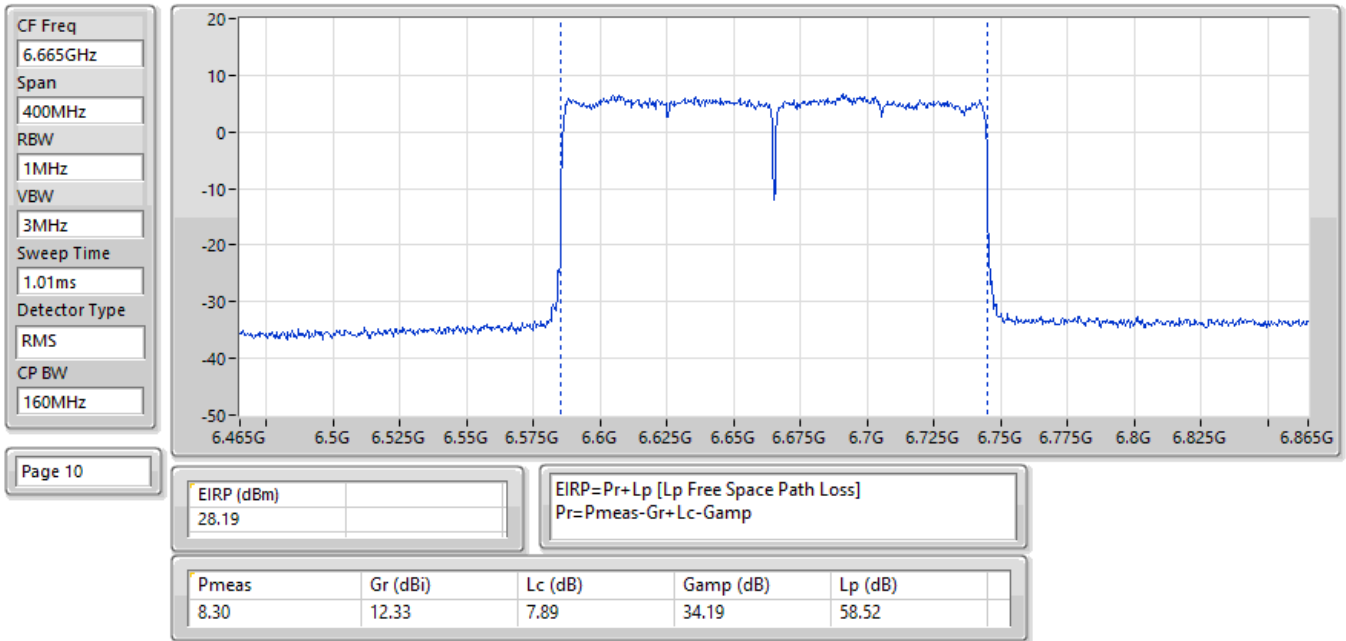

08/02/2025


EIRP;Band:6.7G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6825MHz;TX

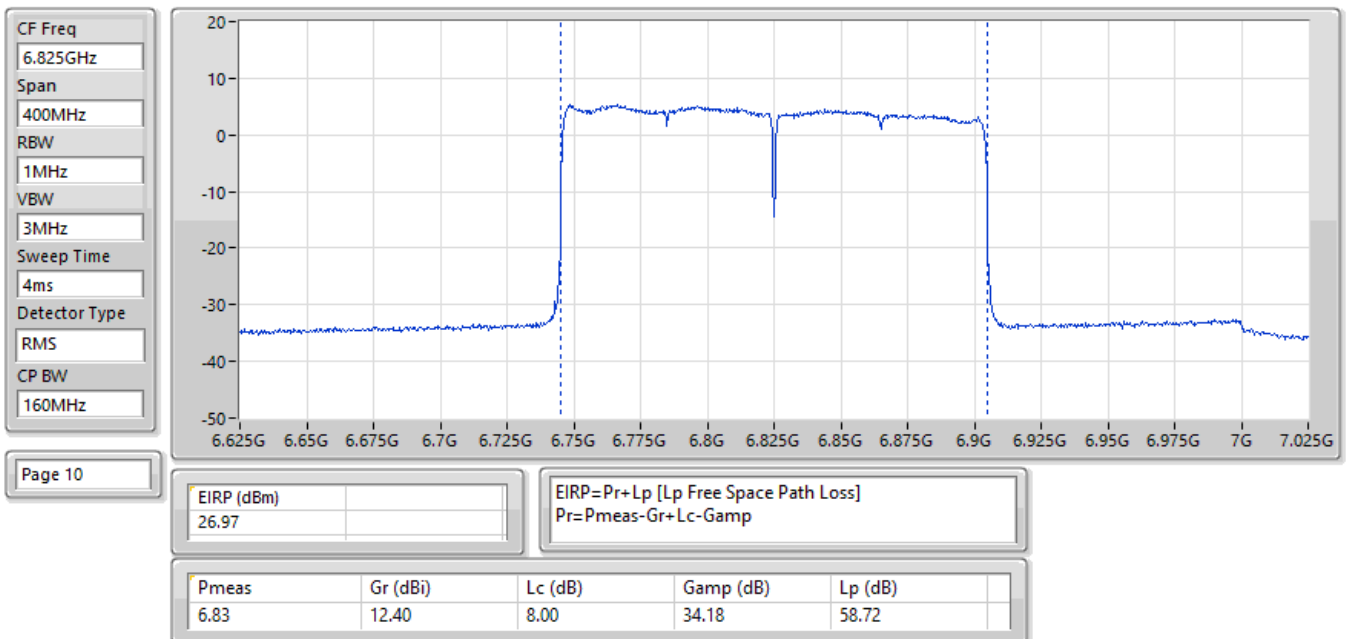

10/02/2025

EIRP;Band:6.7G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6745MHz;TX

CF Freq
6.745GHz
Span
800MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4ms
Detector Type
RMS
CP BW
320MHz

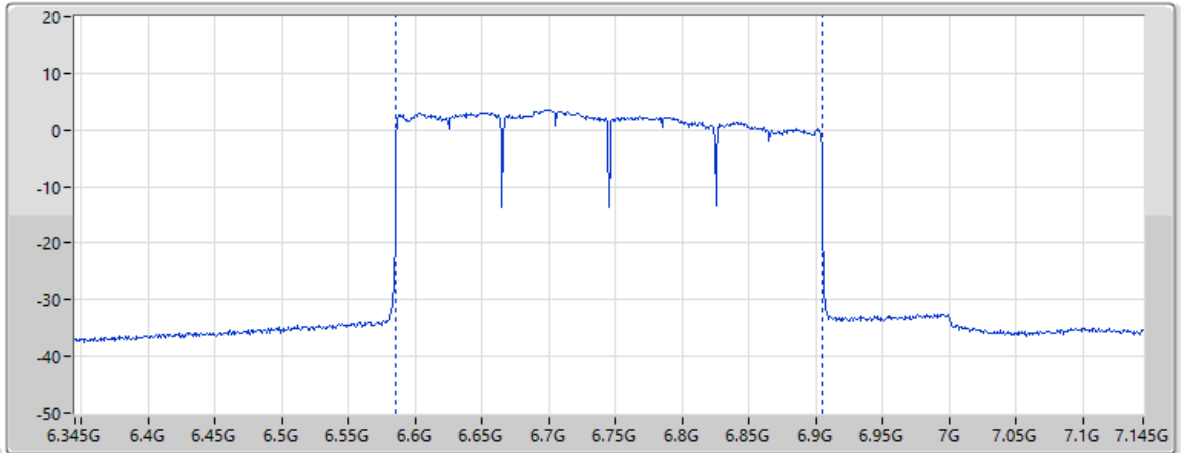

Page 10

EIRP (dBm)
27.92


EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
7.93	12.40	7.96	34.19	58.62

10/02/2025

EIRP;Band:6.7G;be320,BF;BWch:320MHz;Nss:1,(M0);Nant:4;Ch:6905MHz;TX

CF Freq
6.905GHz
Span
800MHz
RBW
1MHz
VBW
3MHz
Sweep Time
4ms
Detector Type
RMS
CP BW
320MHz

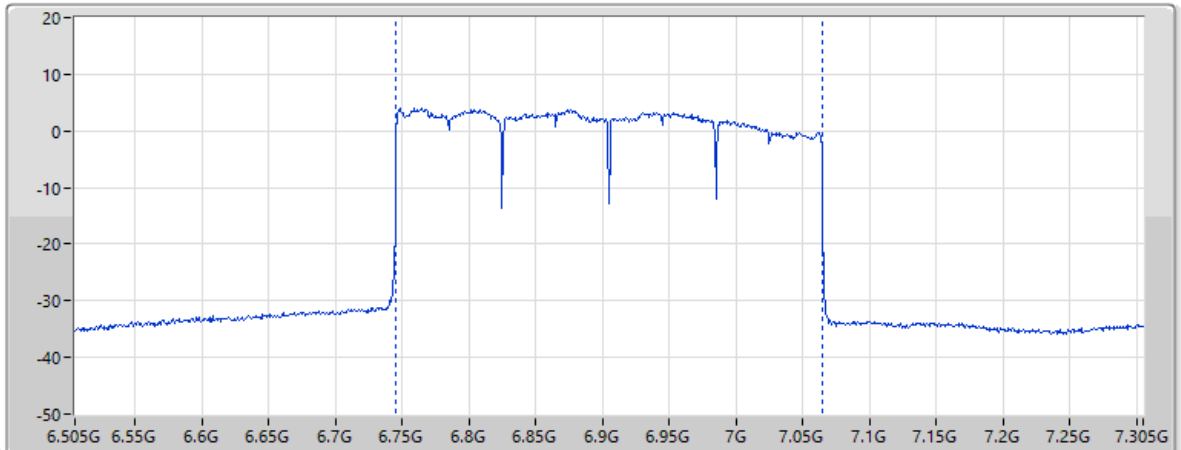

Page 10


EIRP (dBm)
28.27

EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
7.58	12.08	8.12	34.18	58.83


08/02/2025

EIRP:Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6895MHz;TX

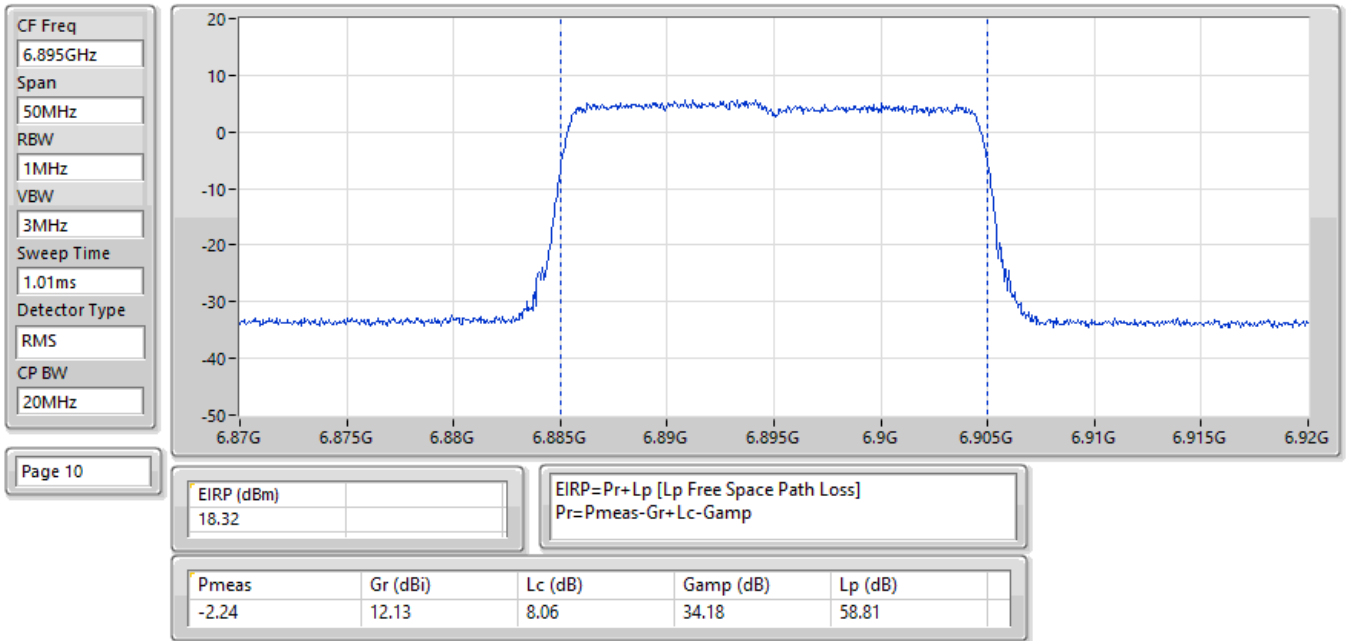


08/02/2025

EIRP:Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6995MHz;TX

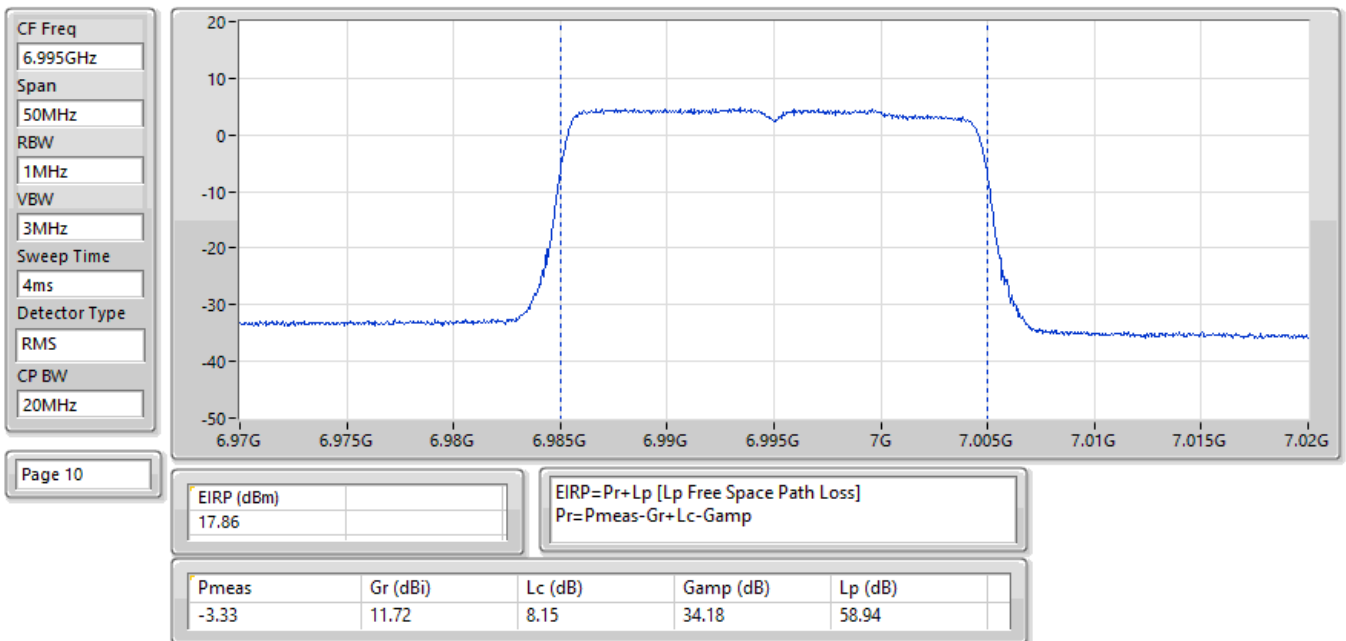


08/02/2025

EIRP:Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:7095MHz;TX

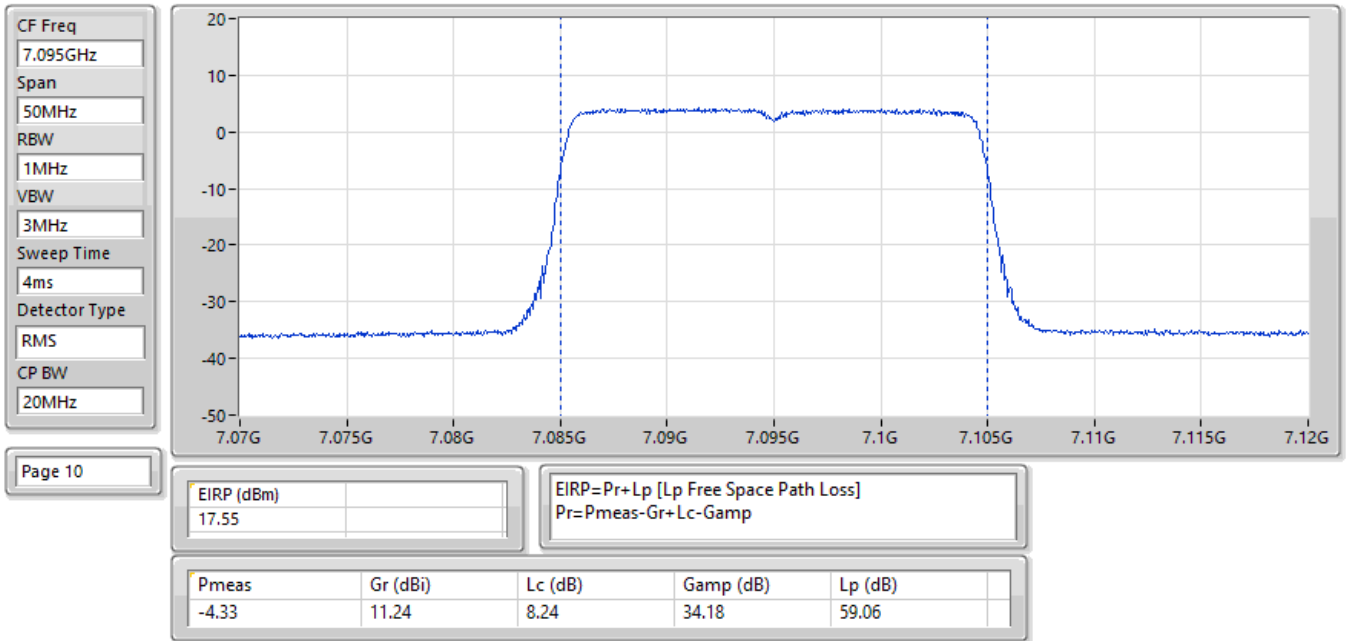


08/02/2025

EIRP:Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6925MHz;TX

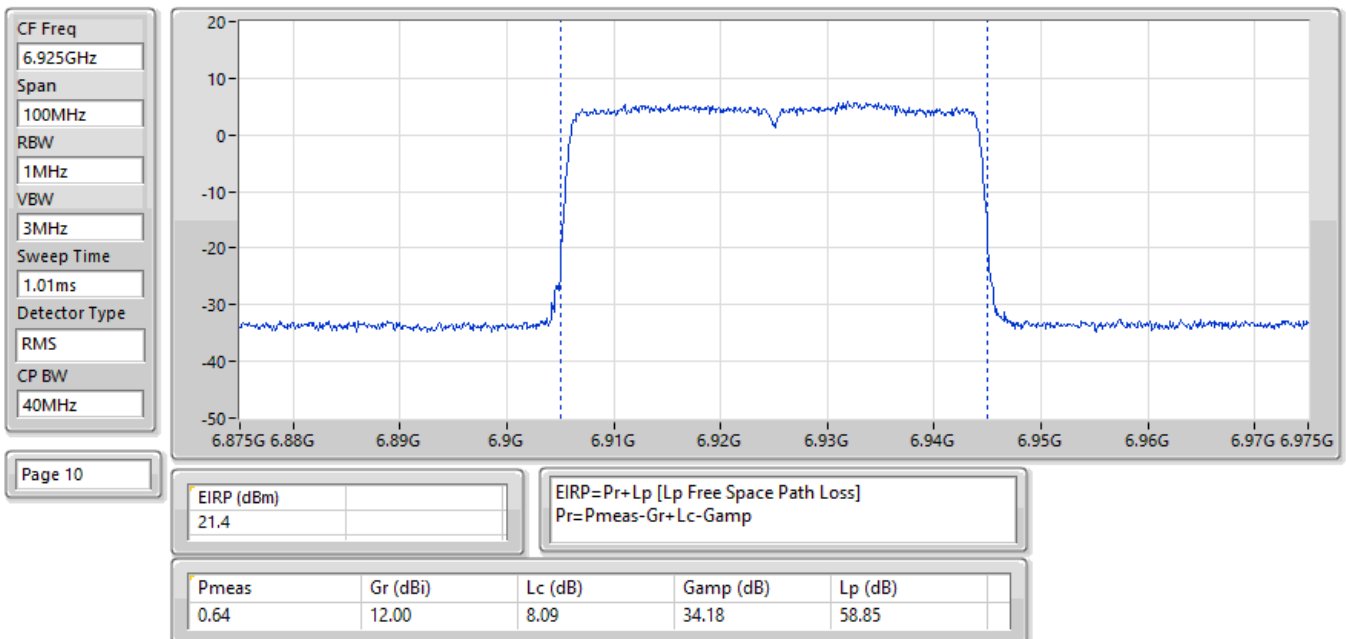


08/02/2025

EIRP:Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:7005MHz;TX

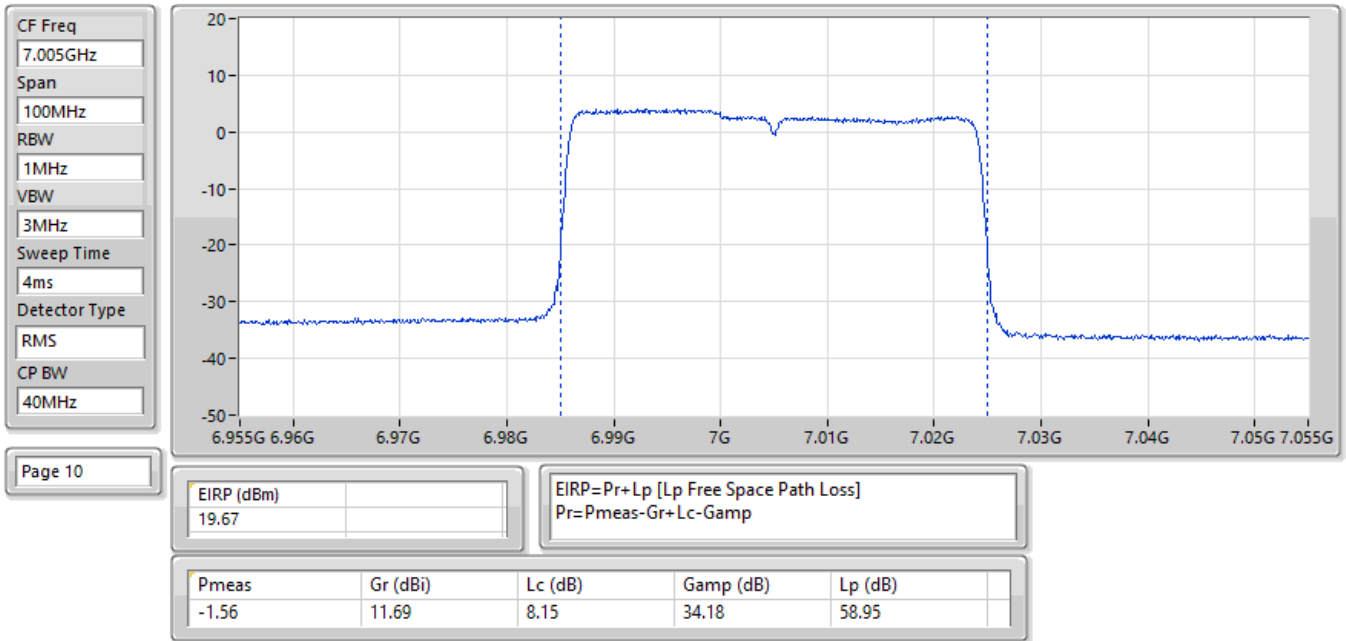


08/02/2025

EIRP:Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:7085MHz;TX

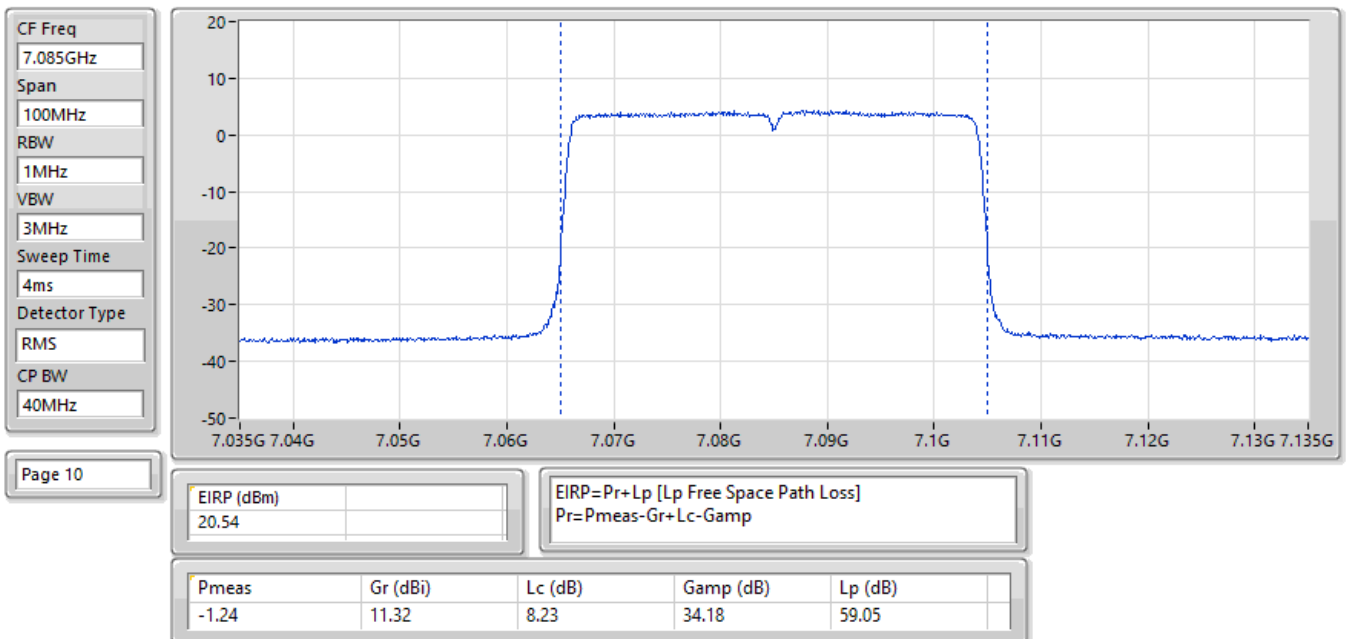


08/02/2025

EIRP:Band:7.0G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6945MHz;TX

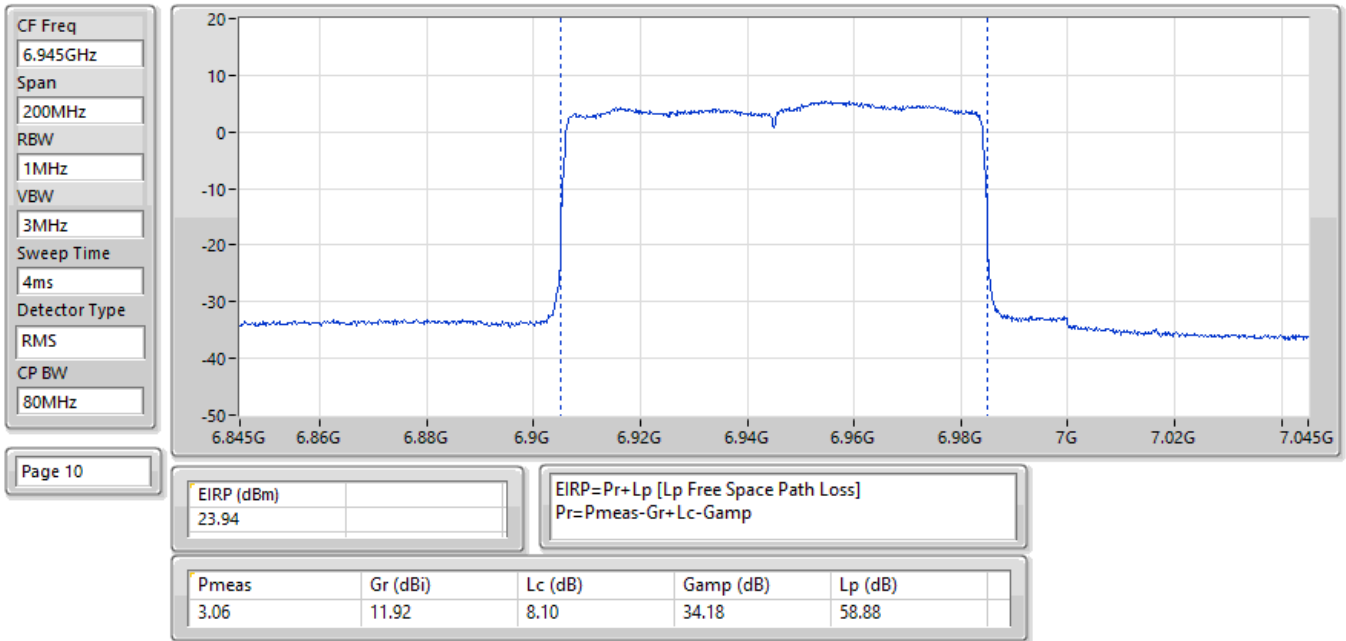


08/02/2025

EIRP:Band:7.0G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:7025MHz;TX

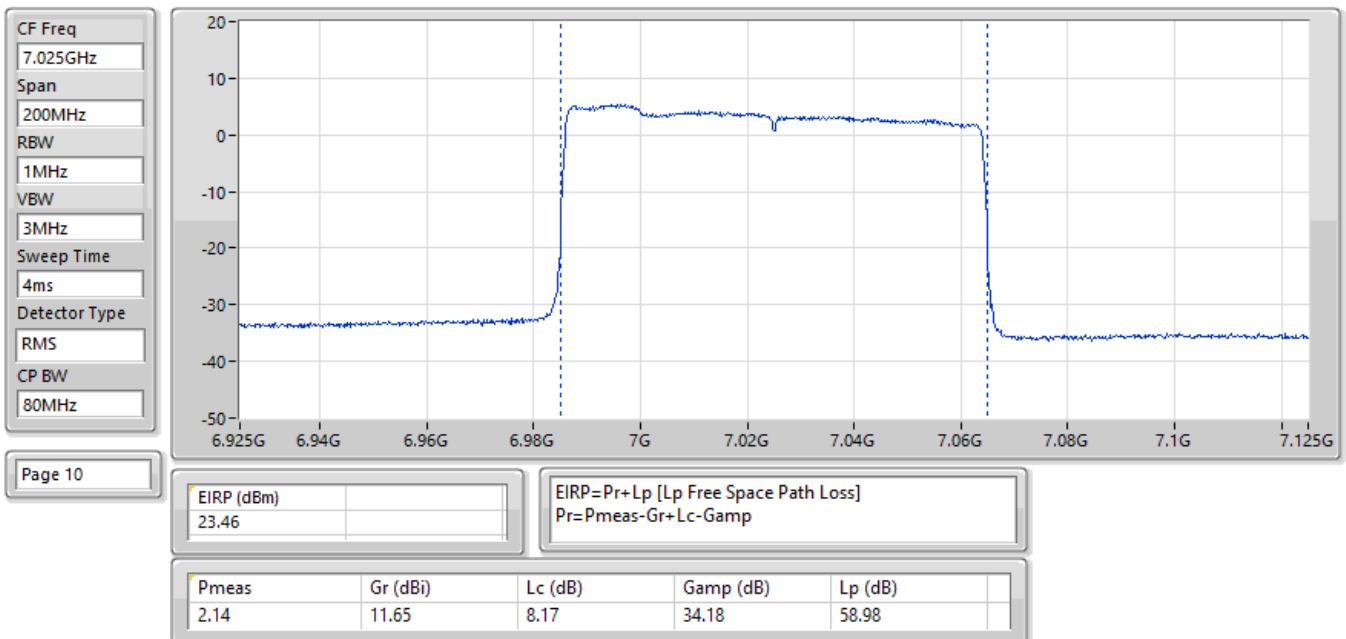

08/02/2025

EIRP;Band:7.0G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6985MHz;TX

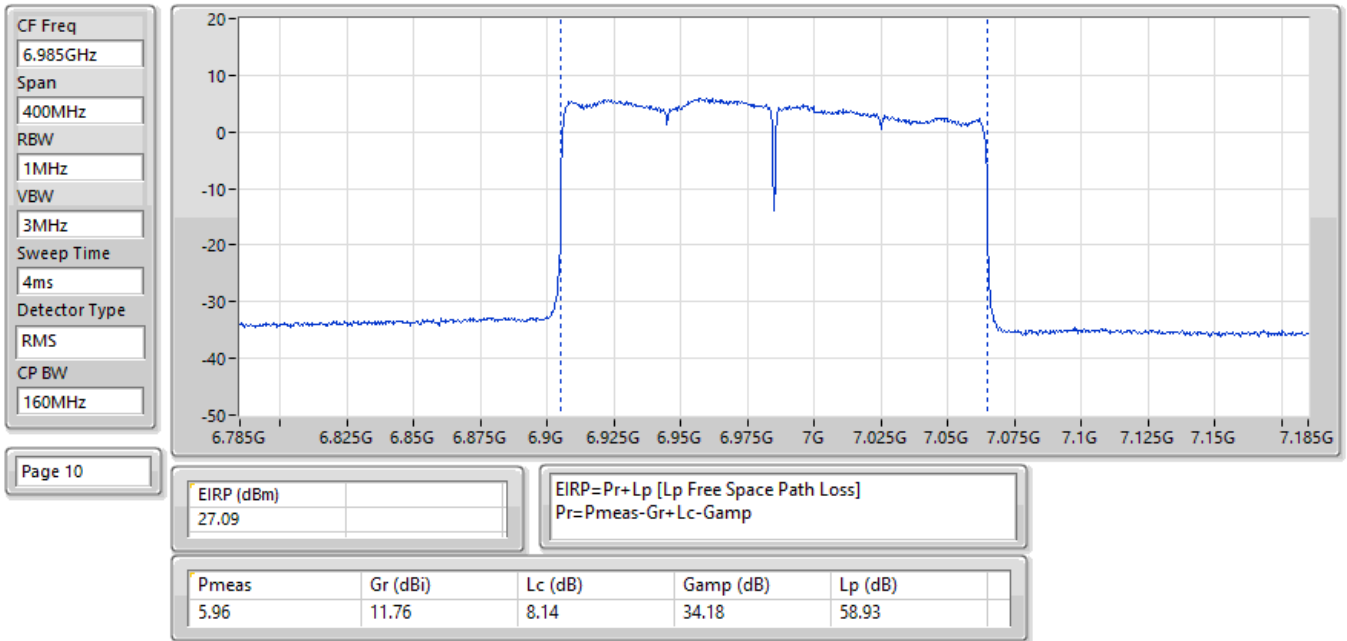

Test Mode: Mode 9

Summary

Mode	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	33.34	2.15774
802.11be EHT20-BF_Nss1,(MCS0)_4TX	32.78	1.89671
802.11be EHT40_Nss1,(MCS0)_4TX	34.54	2.84446
802.11be EHT40-BF_Nss1,(MCS0)_4TX	35.94	3.92645
802.11be EHT80_Nss1,(MCS0)_4TX	32.00	1.58489
802.11be EHT80-BF_Nss1,(MCS0)_4TX	35.52	3.56451
802.11be EHT160_Nss1,(MCS0)_4TX	30.14	1.03276
802.11be EHT160-BF_Nss1,(MCS0)_4TX	34.02	2.52348
802.11be EHT320_Nss1,(MCS0)_4TX	29.18	0.82794
802.11be EHT320-BF_Nss1,(MCS0)_4TX	33.52	2.24905
6.525-6.875GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	33.52	2.24905
802.11be EHT20-BF_Nss1,(MCS0)_4TX	34.88	3.07610
802.11be EHT40_Nss1,(MCS0)_4TX	32.19	1.65577
802.11be EHT40-BF_Nss1,(MCS0)_4TX	35.69	3.70681
802.11be EHT80_Nss1,(MCS0)_4TX	31.90	1.54882
802.11be EHT80-BF_Nss1,(MCS0)_4TX	35.23	3.33426
802.11be EHT160_Nss1,(MCS0)_4TX	29.58	0.90782
802.11be EHT160-BF_Nss1,(MCS0)_4TX	32.86	1.93197

Result

Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-
5955MHz	Pass	29.90	36.00
6195MHz	Pass	33.34	36.00
6415MHz	Pass	30.42	36.00
6535MHz	Pass	31.33	36.00
6695MHz	Pass	33.52	36.00
6855MHz	Pass	32.98	36.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-
5965MHz	Pass	28.76	36.00
6205MHz	Pass	34.54	36.00
6405MHz	Pass	30.97	36.00
6565MHz	Pass	32.19	36.00
6685MHz	Pass	31.25	36.00
6845MHz	Pass	30.02	36.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-
5985MHz	Pass	26.48	36.00
6225MHz	Pass	32.00	36.00
6385MHz	Pass	30.33	36.00
6625MHz	Pass	31.90	36.00
6705MHz	Pass	30.97	36.00
6785MHz	Pass	31.32	36.00
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-
6025MHz	Pass	29.05	36.00
6185MHz	Pass	29.77	36.00
6345MHz	Pass	30.14	36.00
6665MHz	Pass	29.58	36.00
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-
6105MHz	Pass	29.18	36.00
6265MHz	Pass	28.56	36.00
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-
5955MHz	Pass	30.67	36.00
6195MHz	Pass	32.78	36.00
6415MHz	Pass	30.58	36.00
6535MHz	Pass	34.65	36.00
6695MHz	Pass	34.88	36.00
6855MHz	Pass	33.56	36.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-
5965MHz	Pass	29.86	36.00
6205MHz	Pass	35.94	36.00
6405MHz	Pass	34.15	36.00
6565MHz	Pass	35.69	36.00
6685MHz	Pass	34.43	36.00
6845MHz	Pass	33.19	36.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-
5985MHz	Pass	30.71	36.00
6225MHz	Pass	35.52	36.00
6385MHz	Pass	33.29	36.00
6625MHz	Pass	35.23	36.00
6705MHz	Pass	35.10	36.00
6785MHz	Pass	34.64	36.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-
6025MHz	Pass	33.04	36.00
6185MHz	Pass	33.35	36.00
6345MHz	Pass	34.02	36.00
6665MHz	Pass	32.86	36.00



Radiated EIRP

Appendix B.9

Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-
6105MHz	Pass	32.22	36.00
6265MHz	Pass	33.52	36.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

27/12/2024

EIRP;Band:6.2G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:5955MHz;TX

CF Freq
5.955GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
20MHz

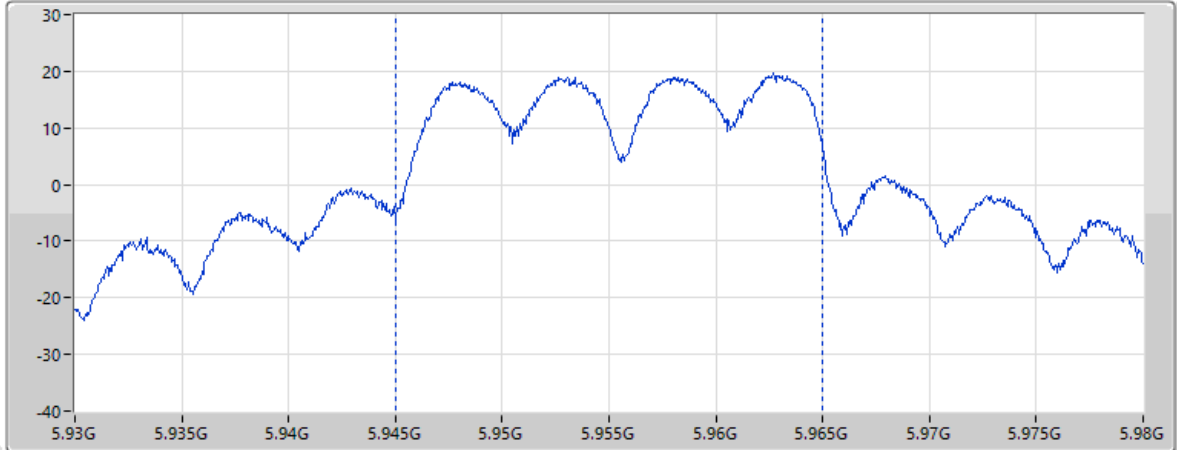

Page 10

EIRP (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
29.9				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
10.44	11.01	8.12	35.19	57.54

27/12/2024

EIRP;Band:6.2G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6195MHz;TX

CF Freq
6.195GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
20MHz

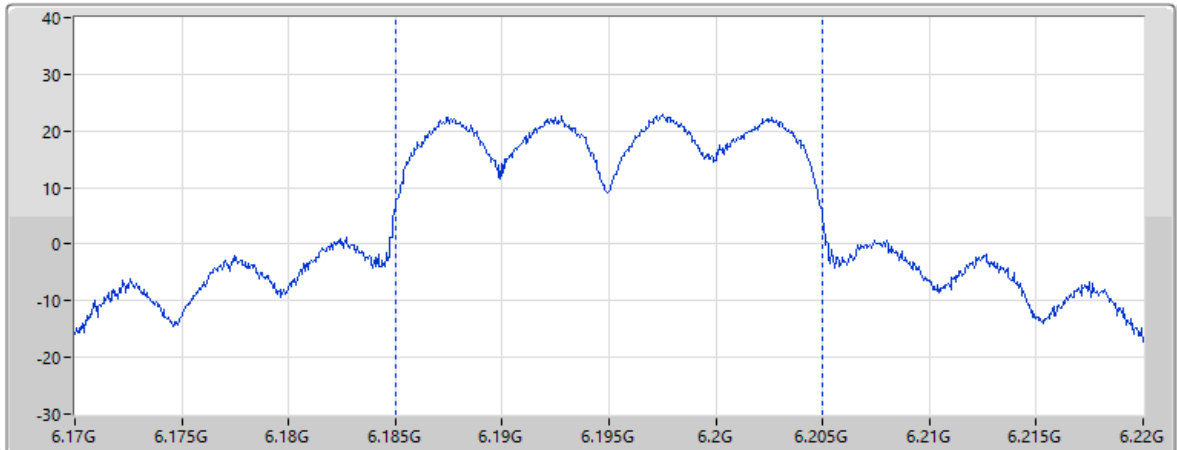


Page 10

EIRP (dBm)	EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp			
33.34				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
13.29	11.09	8.46	35.20	57.88

15/03/2025

EIRP:Band:6.2G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6415MHz;TX

CF Freq
6.415GHz
Span
50MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

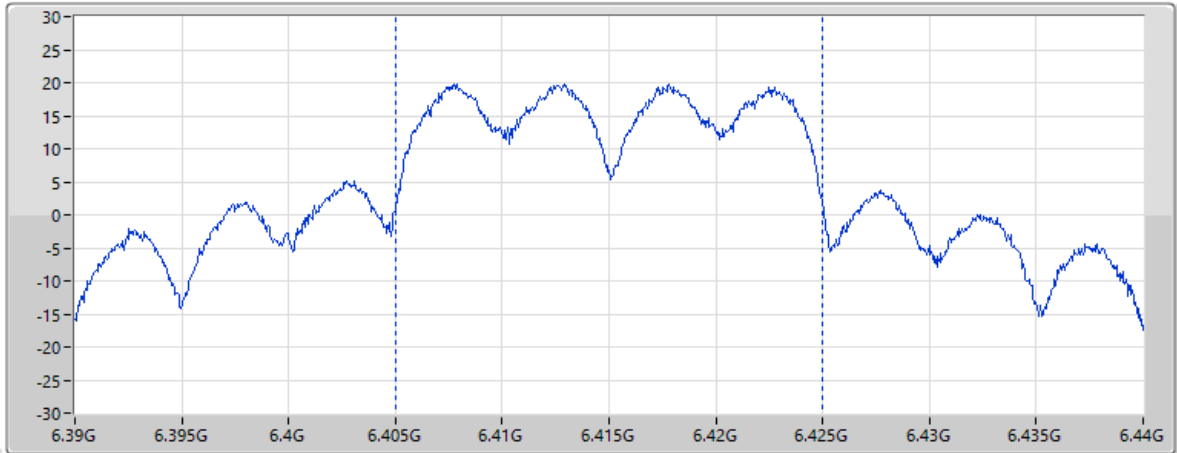

Page 10

EIRP (dBm)
30.42


EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
10.22	11.56	8.78	35.21	58.19

15/03/2025

EIRP:Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6535MHz;TX

CF Freq
6.535GHz
Span
50MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
20MHz

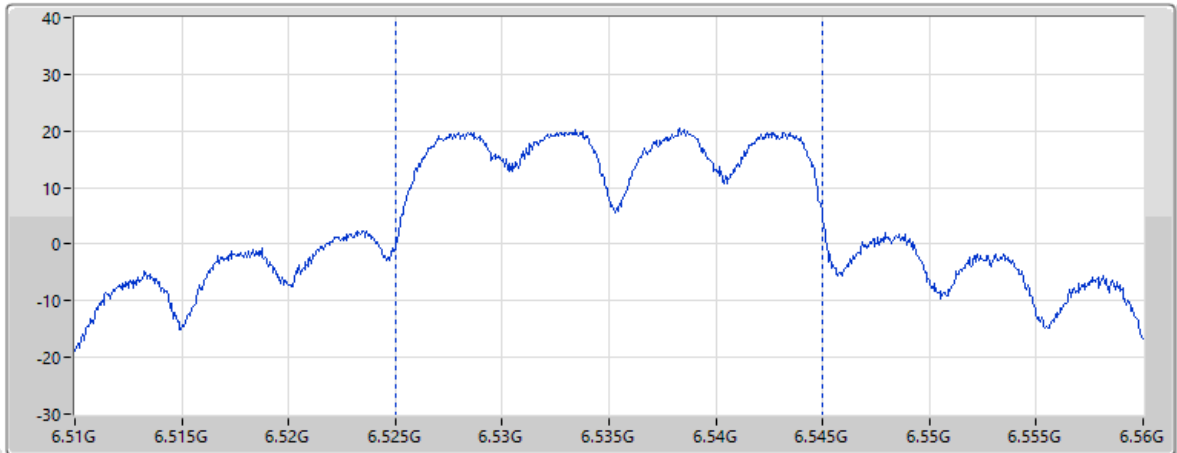

Page 9


EIRP (dBm)
31.33

EIRP=Pr+Lp [Lp Free Space Path Loss]
Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
11.06	11.73	8.86	35.21	58.35


27/12/2024

EIRP:Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6695MHz;TX

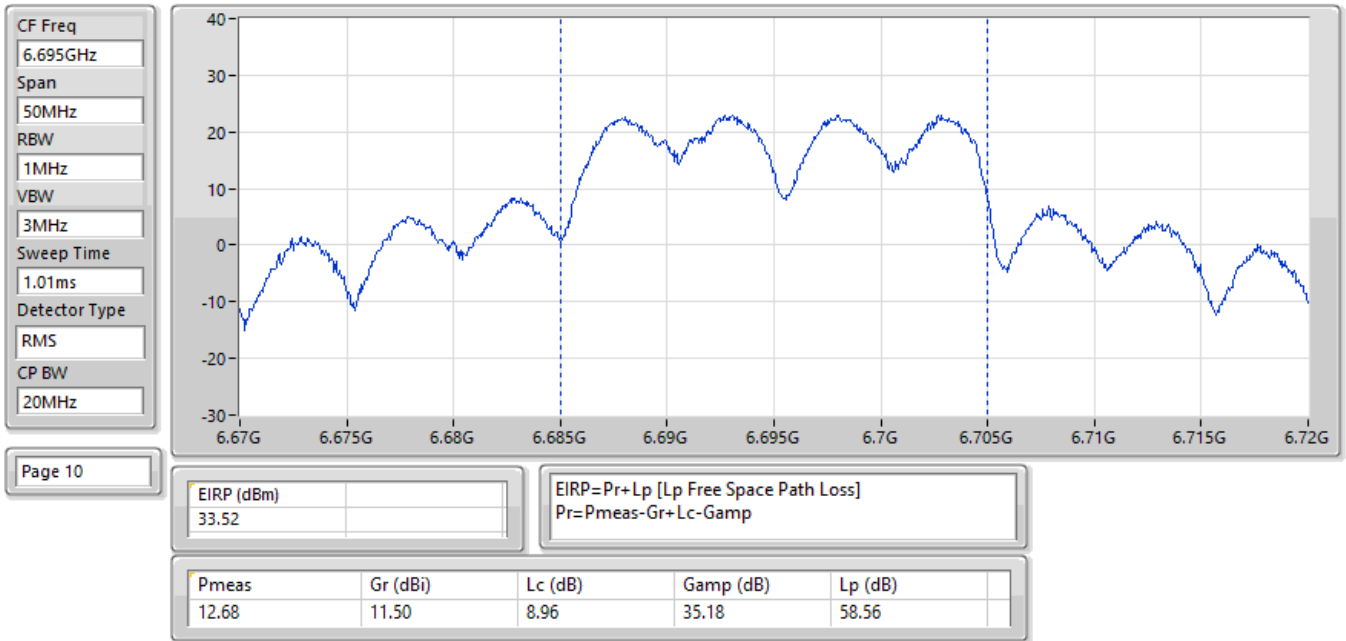


15/03/2025

EIRP:Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:4;Ch:6855MHz;TX

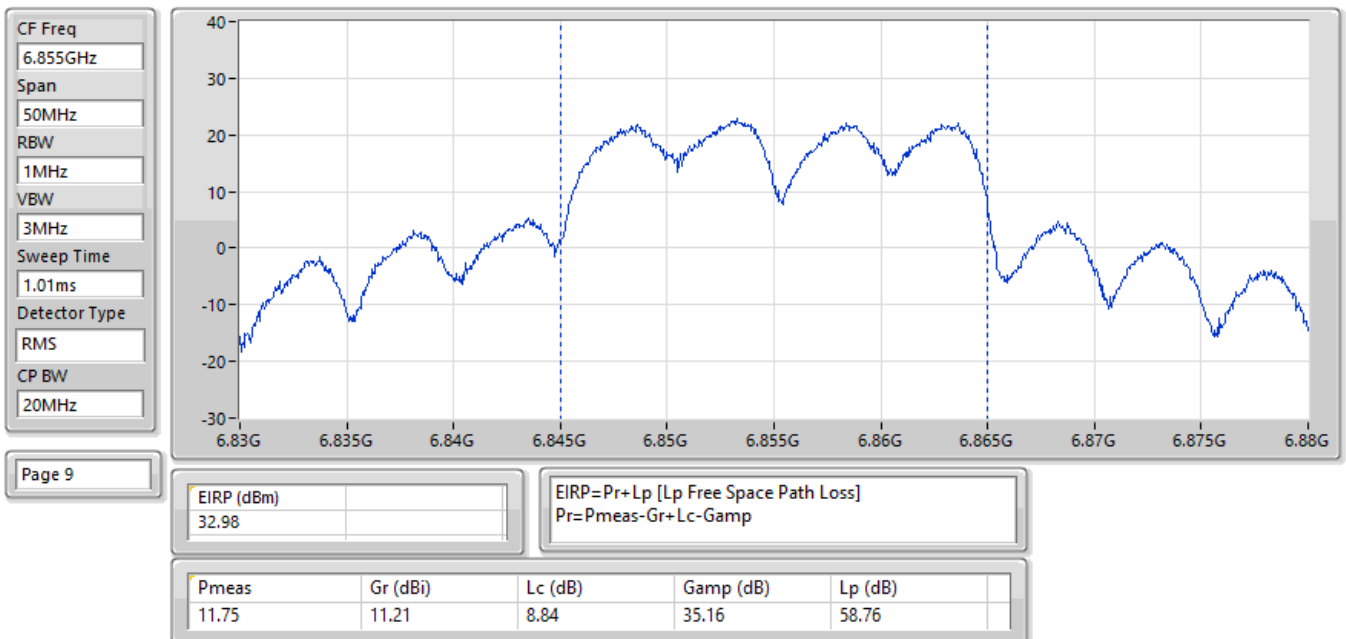


27/12/2024

EIRP:Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:5965MHz;TX

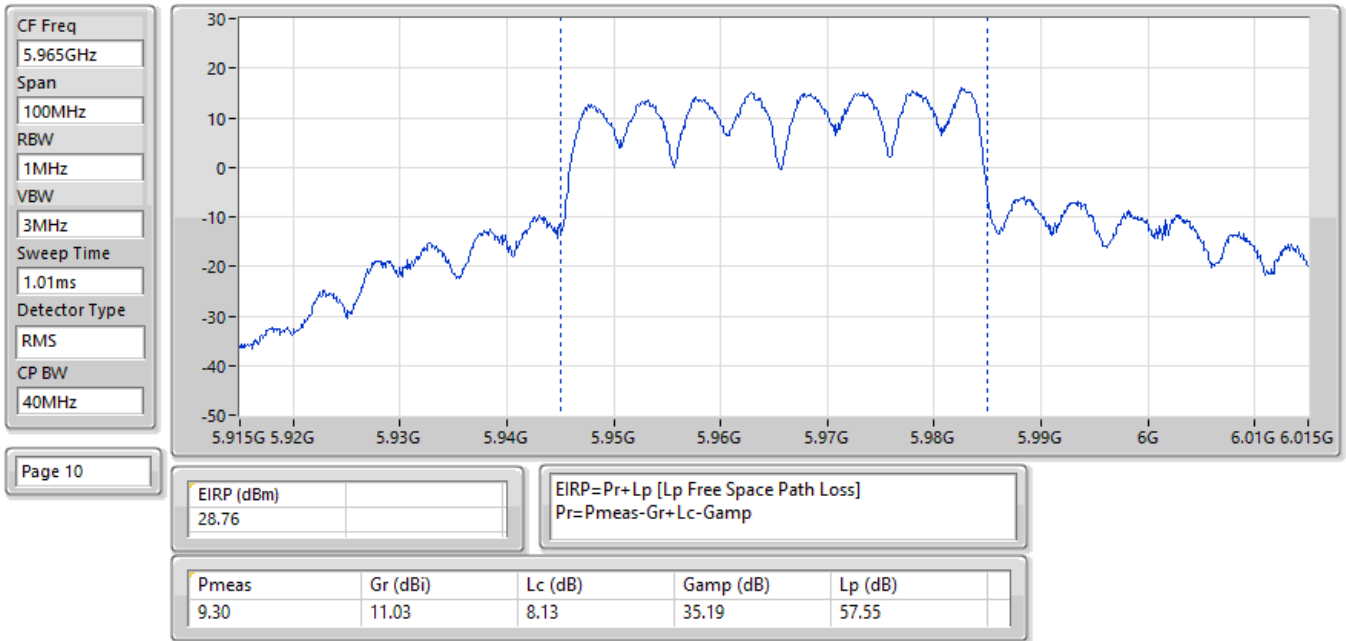


27/12/2024

EIRP:Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:5965MHz;TX

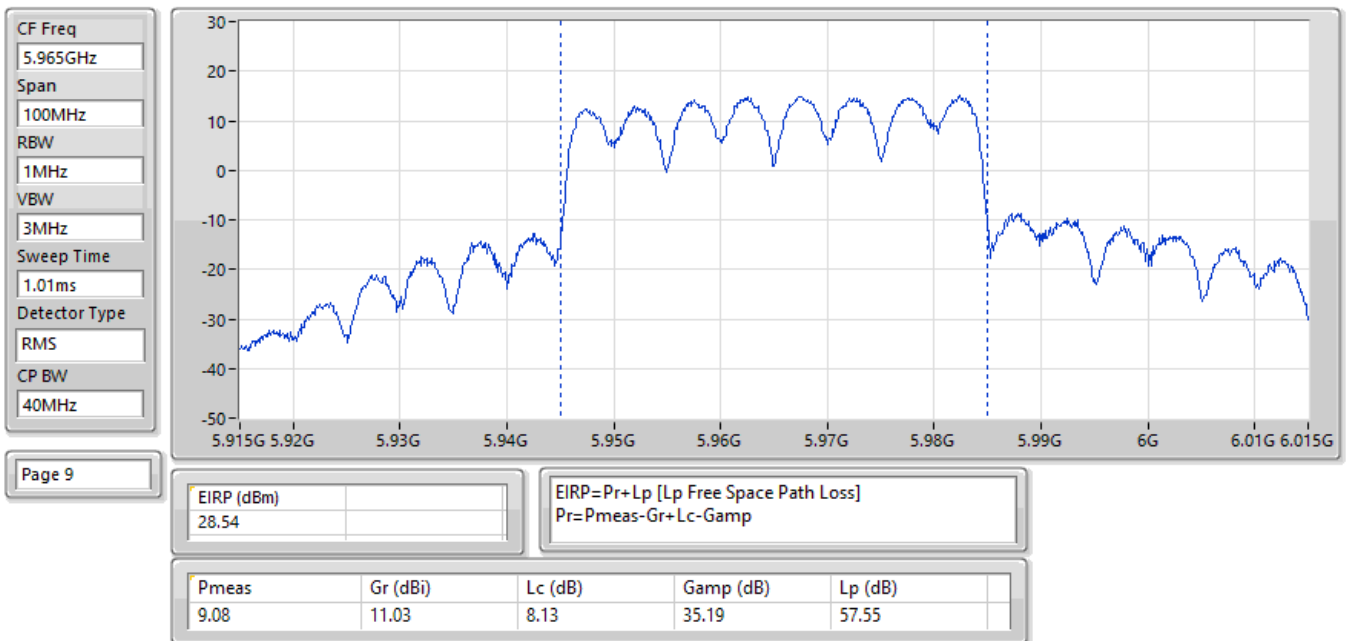


27/12/2024

EIRP:Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6205MHz;TX

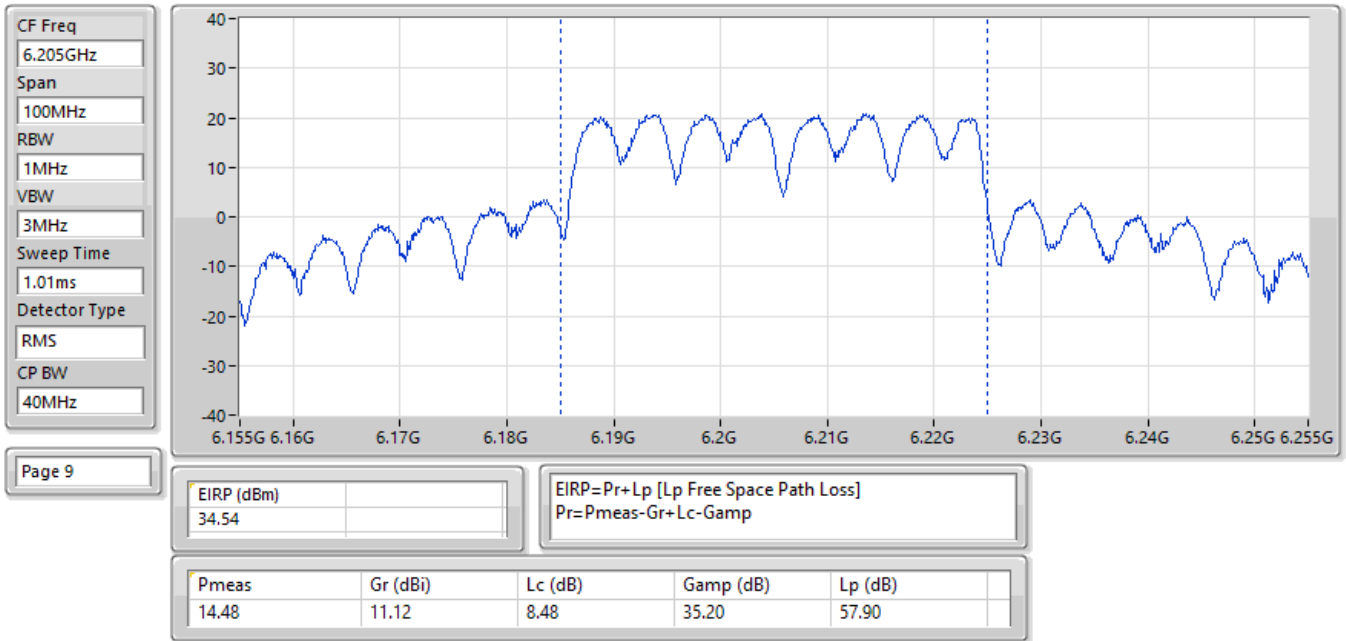


15/03/2025

EIRP:Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6405MHz;TX

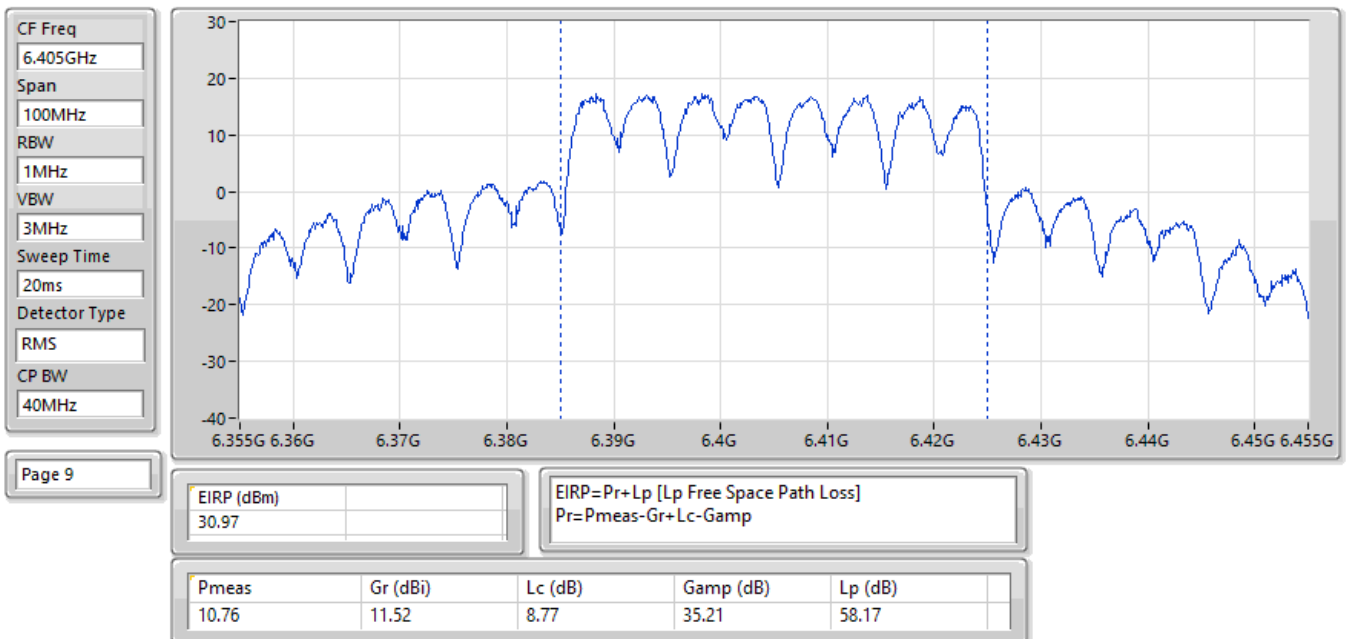


27/12/2024

EIRP:Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6565MHz;TX

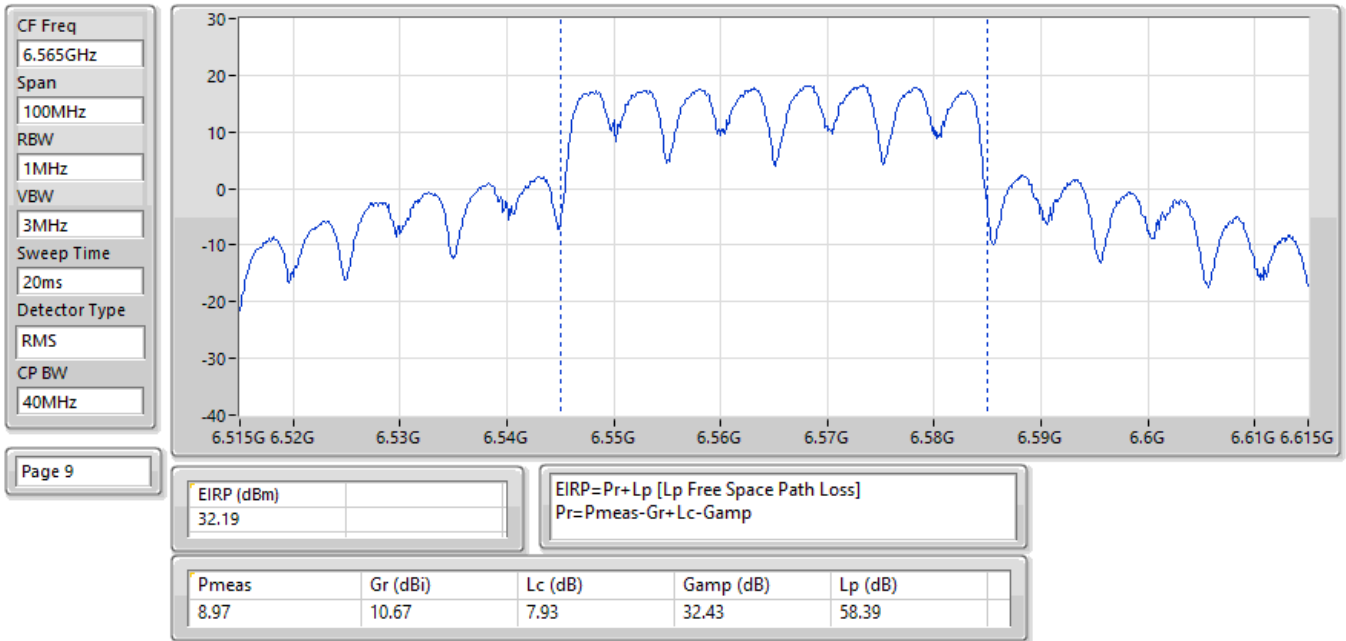

27/12/2024


EIRP:Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6685MHz;TX

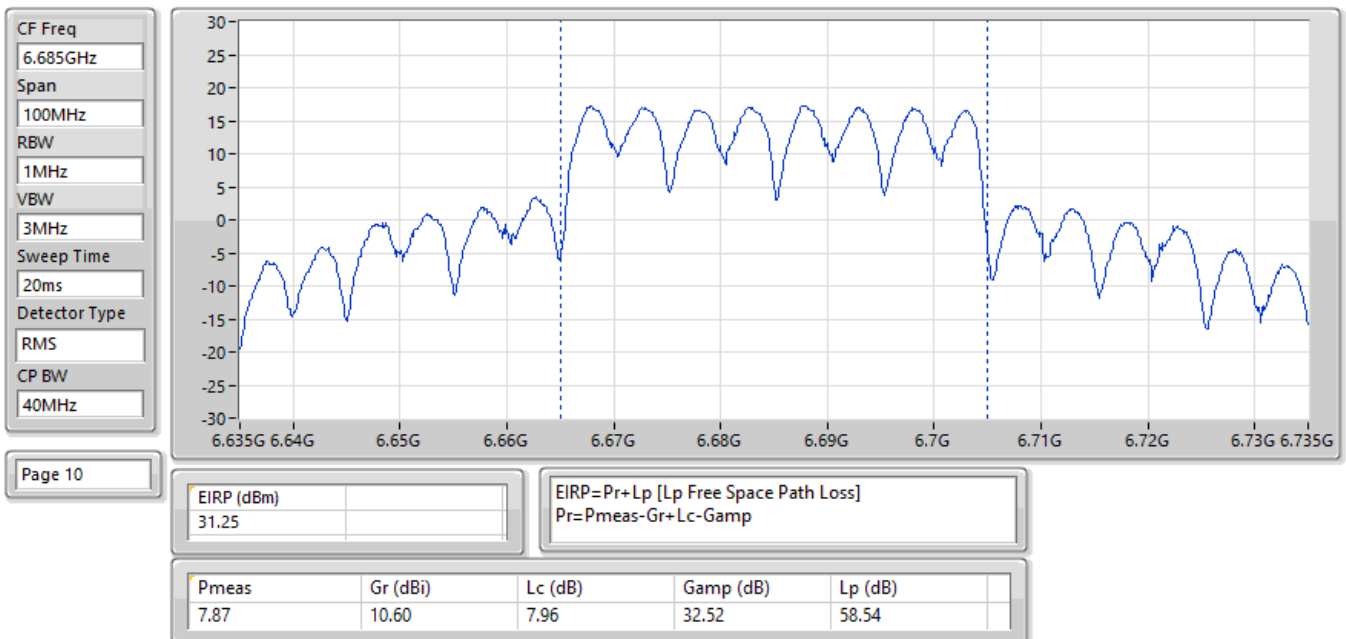

17/03/2025

EIRP:Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:4;Ch:6845MHz;TX

CF Freq
6.845GHz
Span
100MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
40MHz

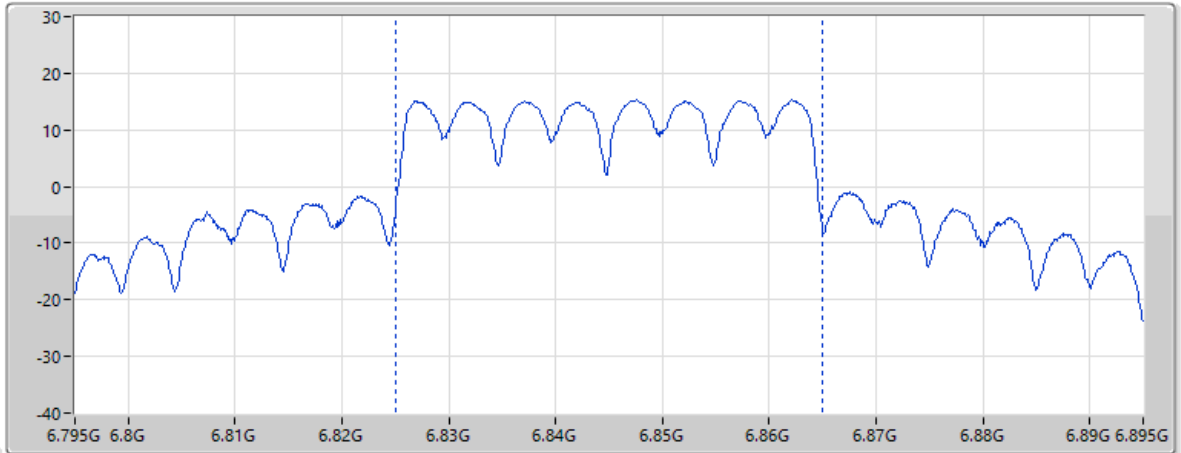


Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
30.02				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
6.43	10.50	7.98	32.64	58.75

27/12/2024

EIRP:Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:5985MHz;TX

CF Freq
5.985GHz
Span
200MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
CP BW
80MHz

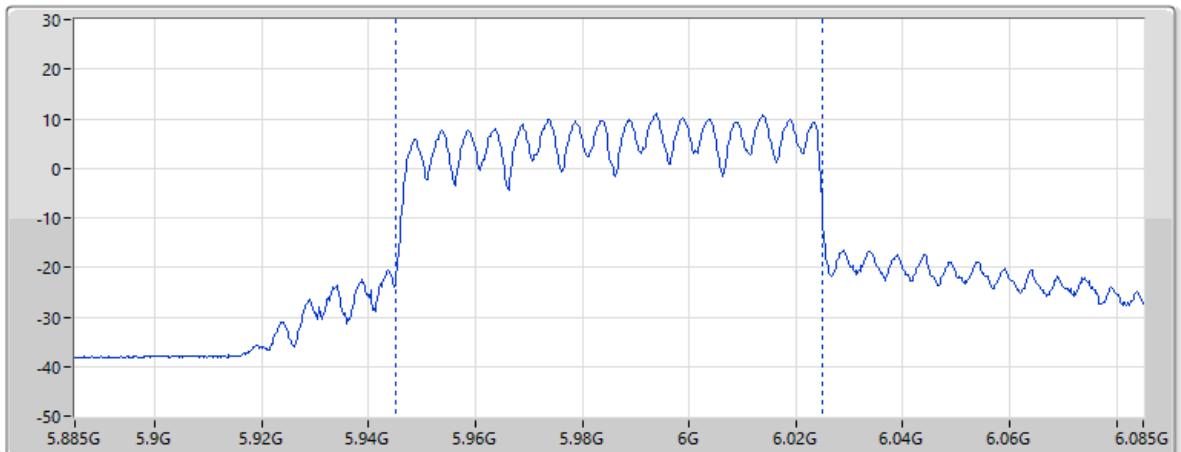


Page 9

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss] Pr=Pmeas-Gr+Lc-Gamp		
26.48				
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
4.38	10.53	7.49	32.44	57.58


27/12/2024

EIRP:Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6225MHz;TX

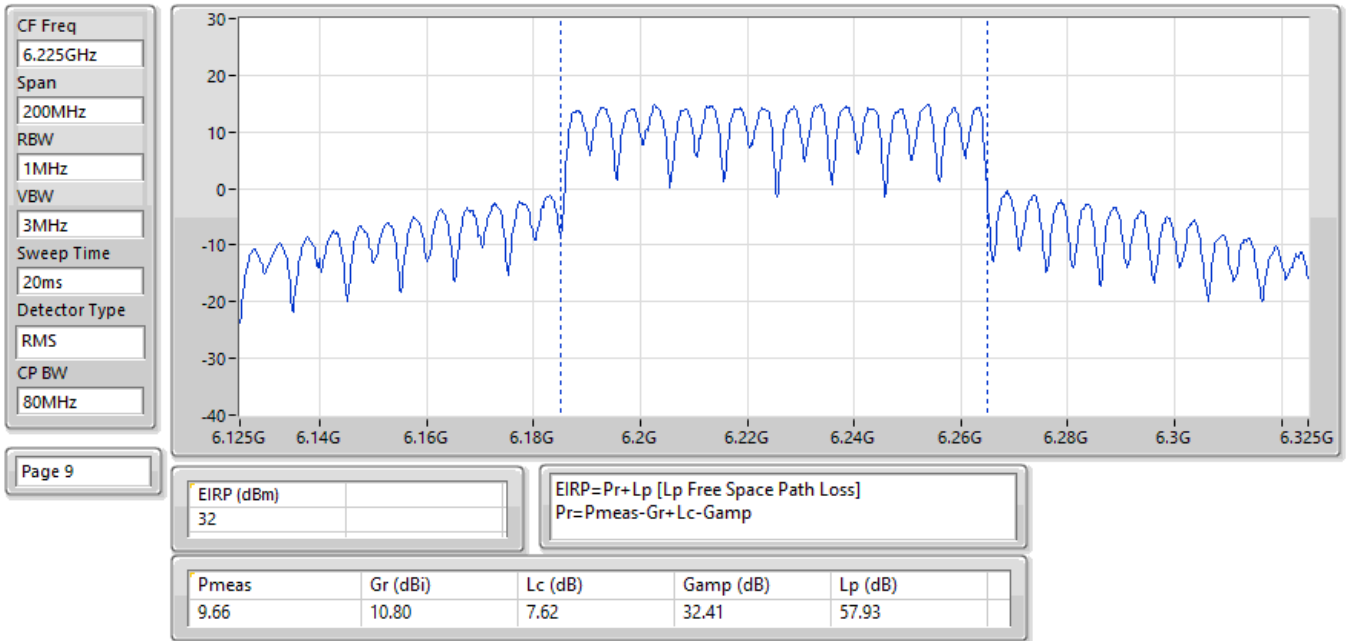


17/03/2025

EIRP:Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6385MHz;TX

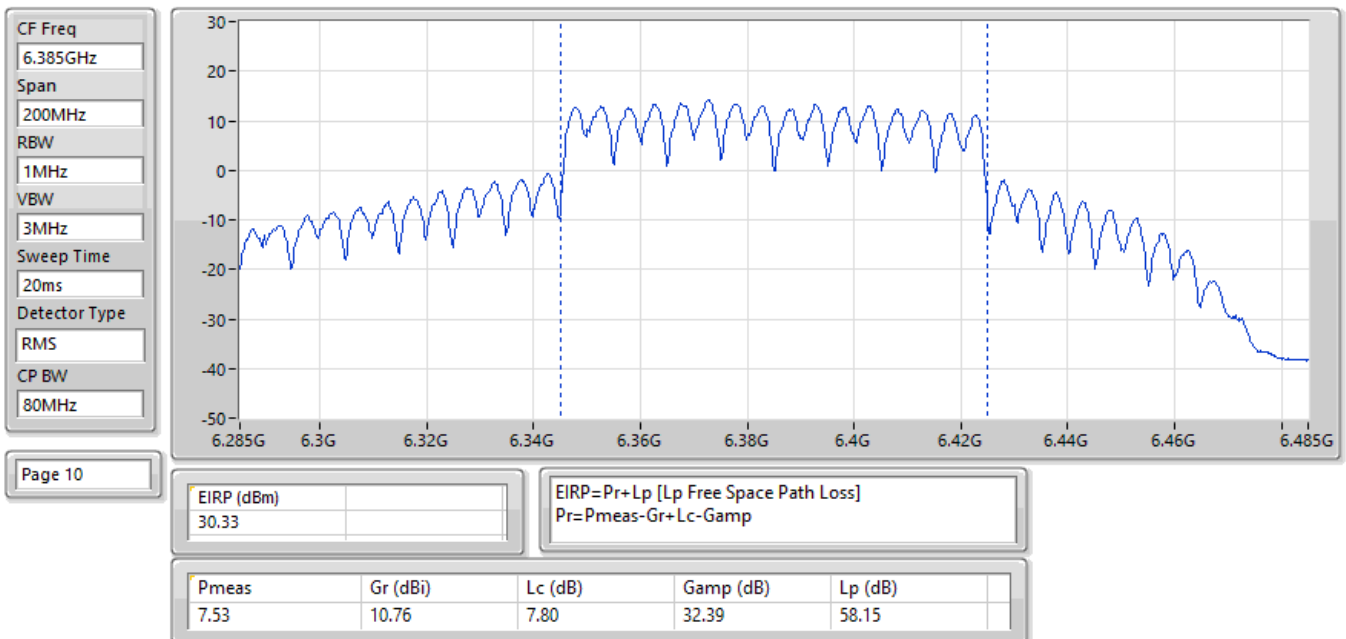


27/12/2024

EIRP:Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6625MHz;TX

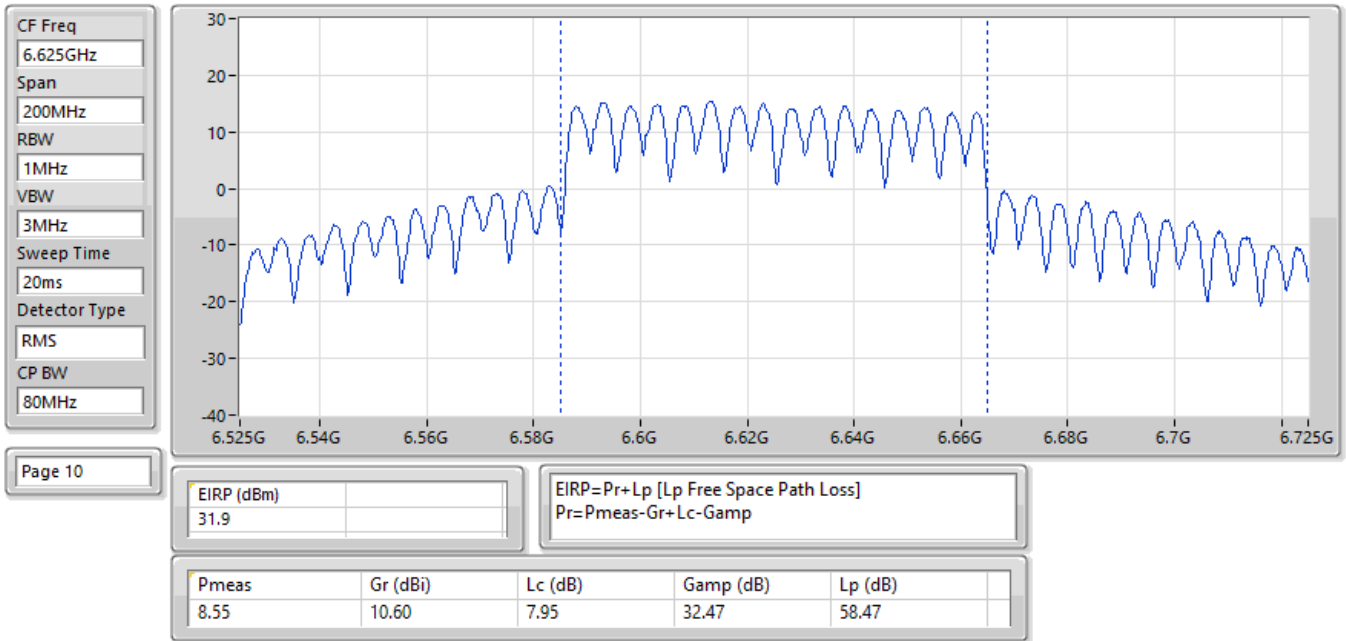


18/03/2025

EIRP:Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6705MHz;TX

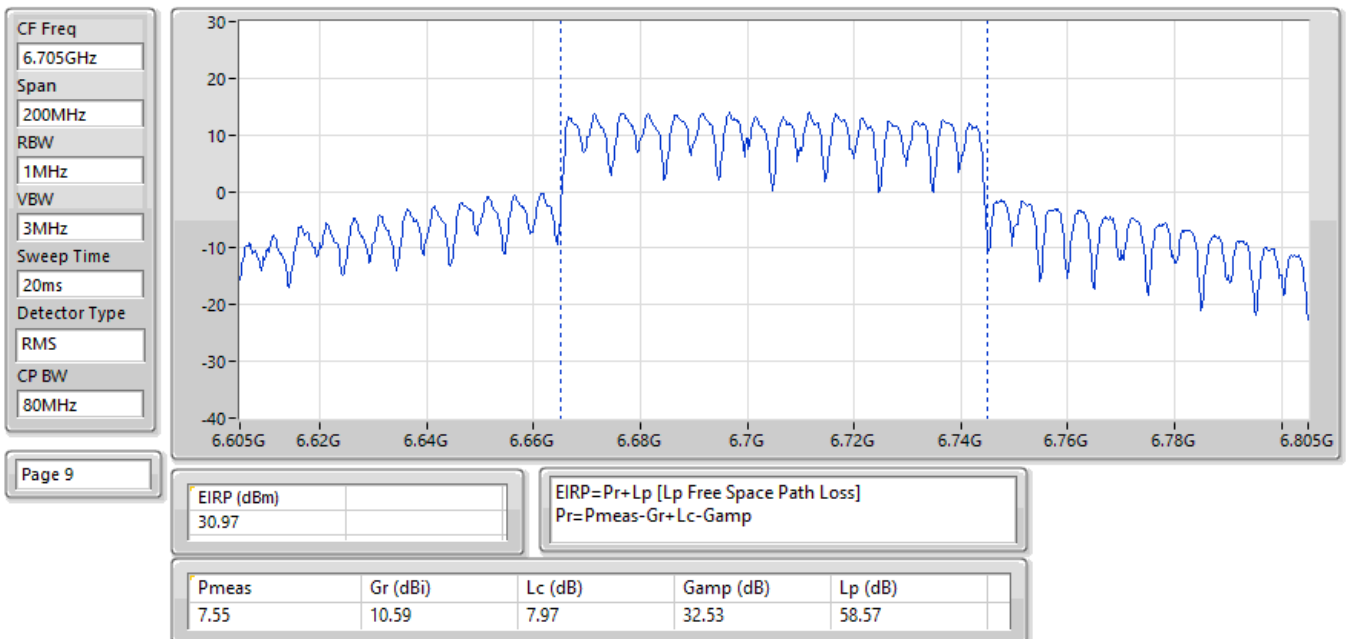

27/12/2024

EIRP;Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:4;Ch:6785MHz;TX

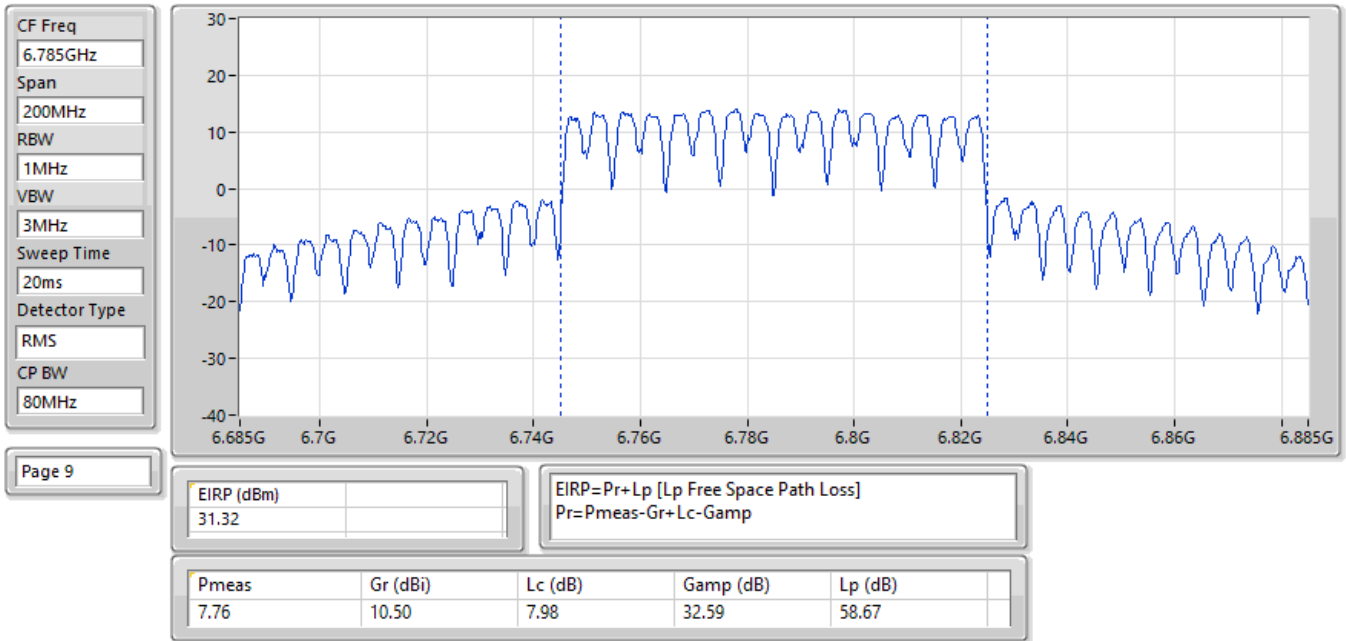

17/03/2025

EIRP;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:4;Ch:6025MHz;TX

