


Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

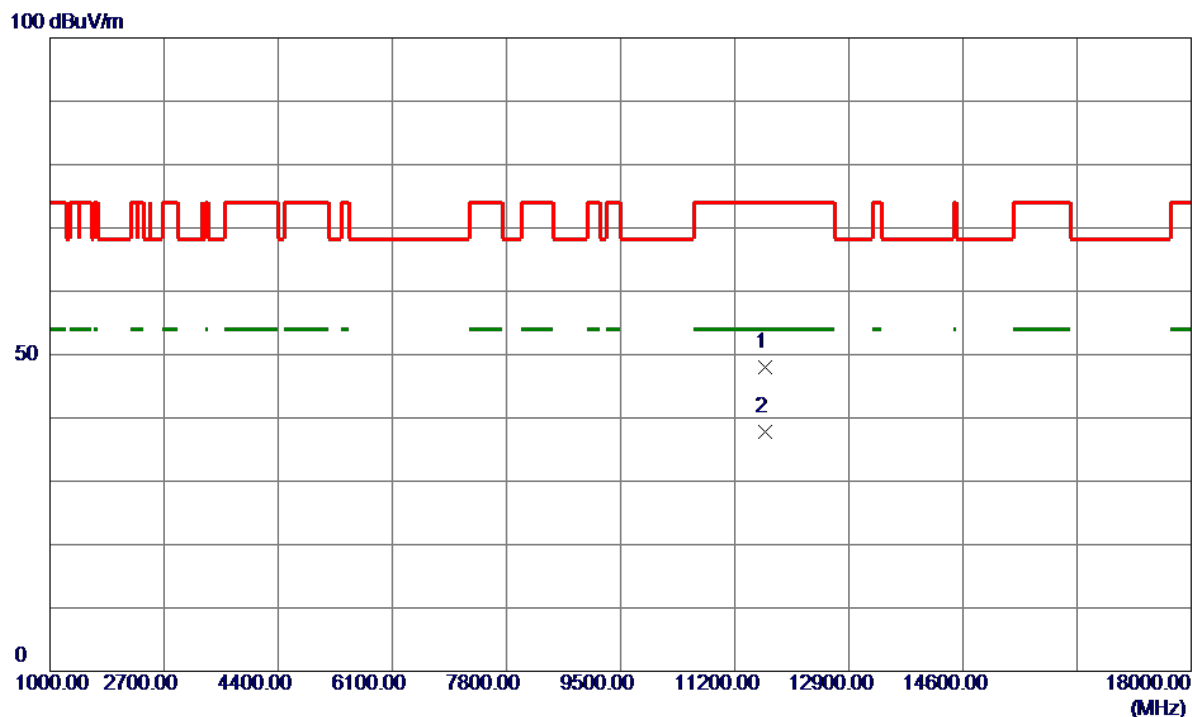


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11649.0400	35.78	12.25	48.03	74.00	-25.97	Peak	
2 *	11651.6000	25.50	12.25	37.75	54.00	-16.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

86.9 dBuV/m

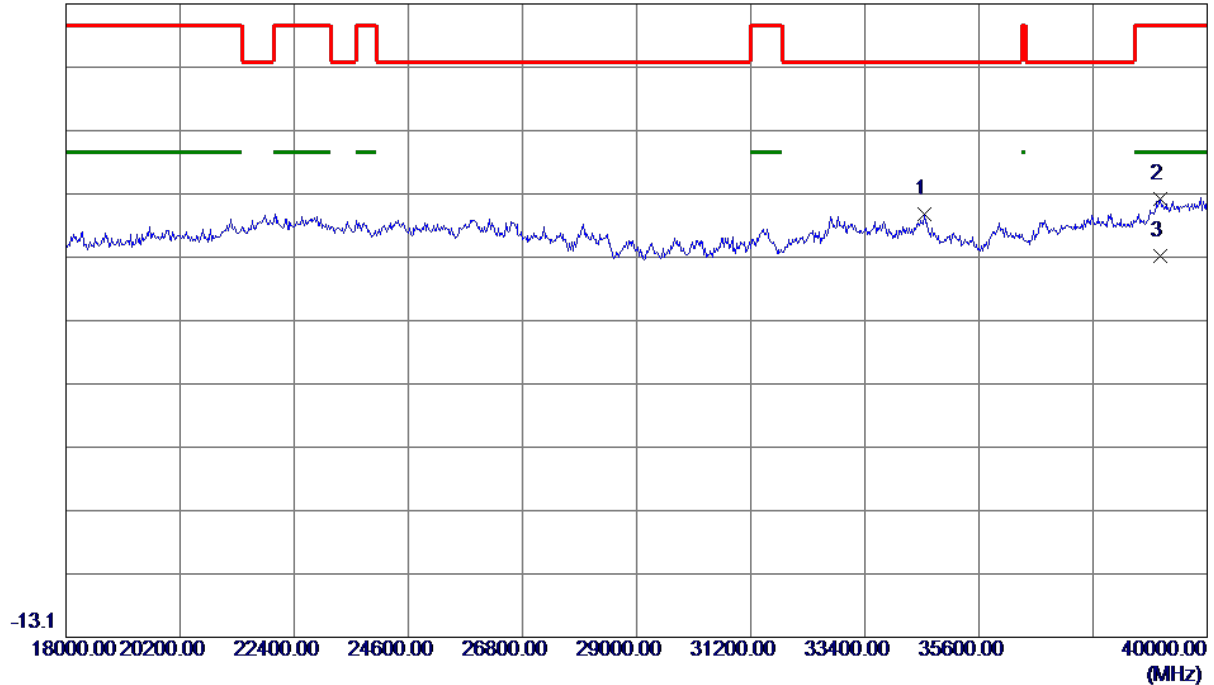

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	34544.0000	47.92	5.73	53.65	77.70	-24.05	Peak	
2	39098.0000	44.44	11.71	56.15	83.50	-27.35	Peak	
3 *	39098.0000	35.48	11.71	47.19	63.50	-16.31	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

86.9 dBuV/m

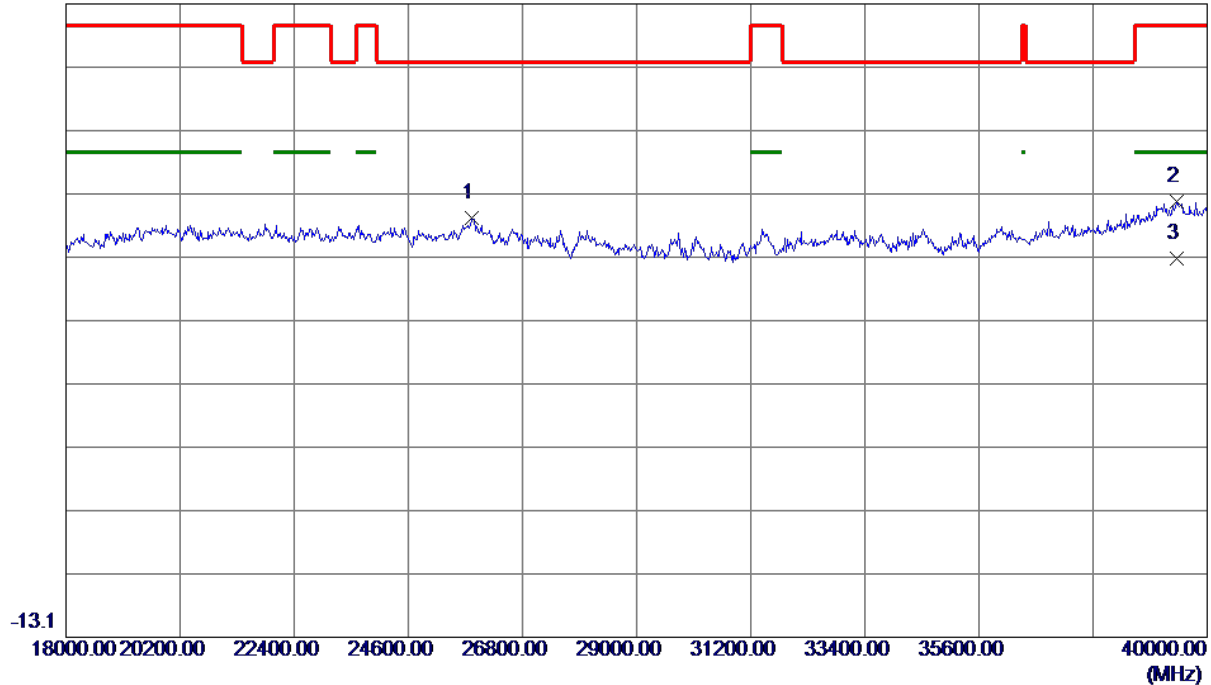

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	25832.0000	47.46	5.69	53.15	77.70	-24.55	Peak	
2	39406.0000	42.81	12.97	55.78	83.50	-27.72	Peak	
3 *	39406.0000	33.78	12.97	46.75	63.50	-16.75	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

The worse case

Test Mode	TX A Mode 5320 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

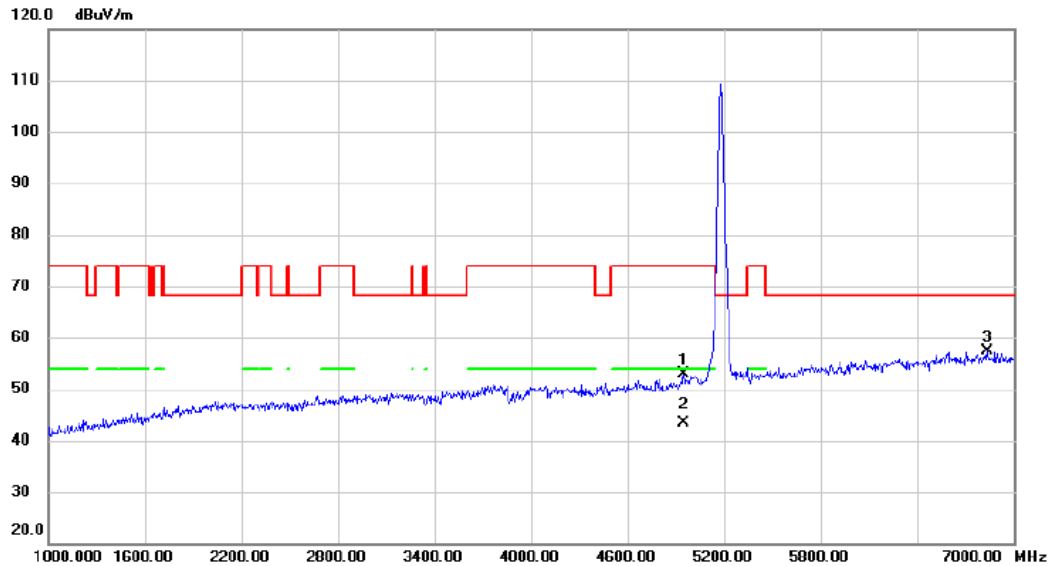


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4948.000	38.93	13.84	52.77	74.00	-21.23	peak	
2	*	4948.000	29.61	13.84	43.45	54.00	-10.55	AVG	
3		6832.000	37.81	19.45	57.26	68.20	-10.94	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX A Mode 5320 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

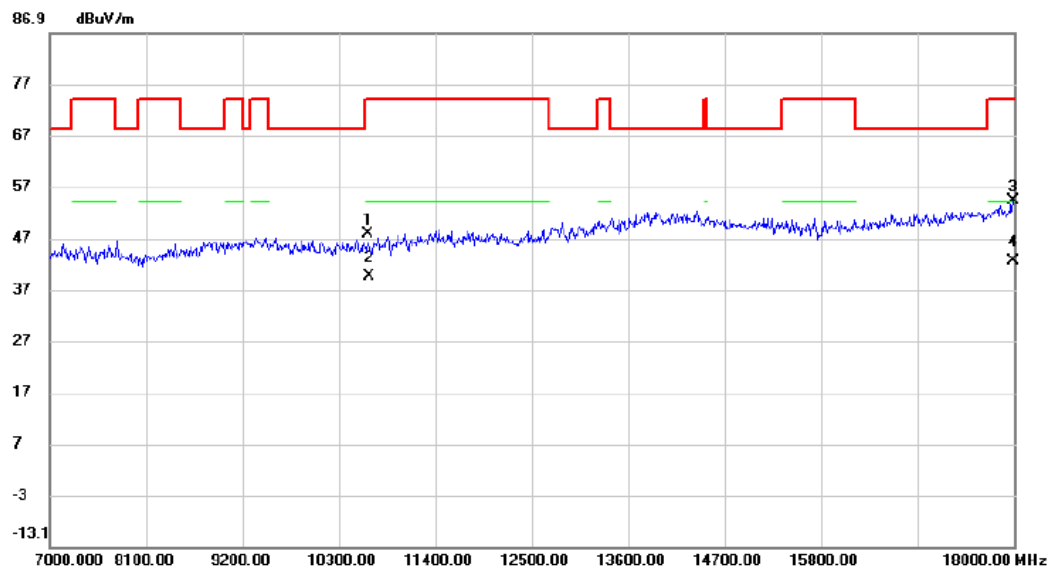

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10637.320	36.47	11.36	47.83	74.00	-26.17	peak	
2	10640.480	28.23	11.37	39.60	54.00	-14.40	AVG	
3	17989.000	38.69	15.67	54.36	74.00	-19.64	peak	
4 *	17989.000	26.85	15.67	42.52	54.00	-11.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH


Test Mode	UNII-1_TX A Mode
-----------	------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	47.940	32.484
40	5200	47.520	32.056
48	5240	47.400	31.311


CH36

CH40
26 dB Bandwidth

CH48

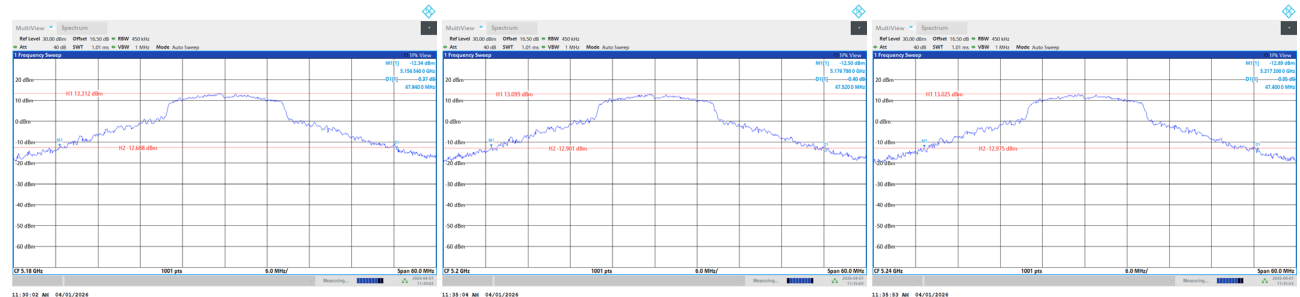

99 % Occupied Bandwidth

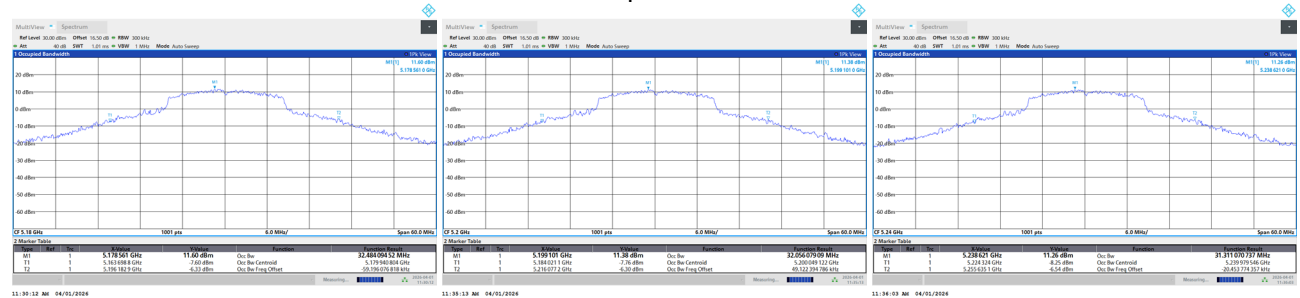


Test Mode UNII-1_TX AC(VHT20) Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	52.380	33.987
40	5200	48.960	33.526
48	5240	47.760	32.780


CH36

CH40
26 dB Bandwidth

CH48

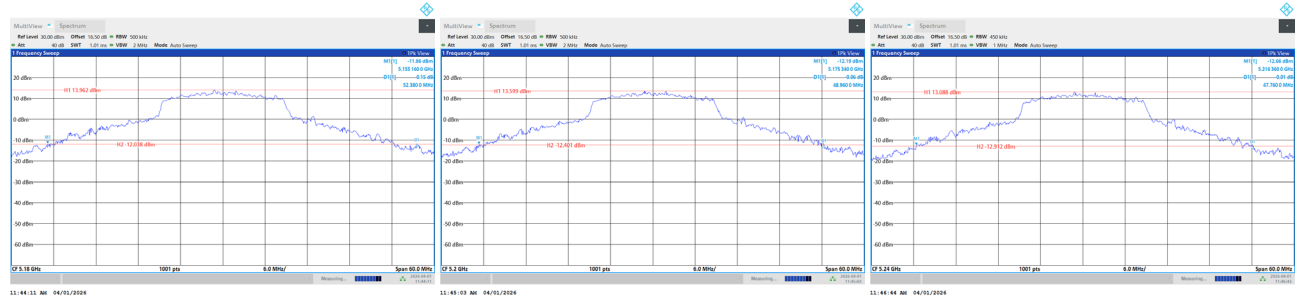


99 % Occupied Bandwidth

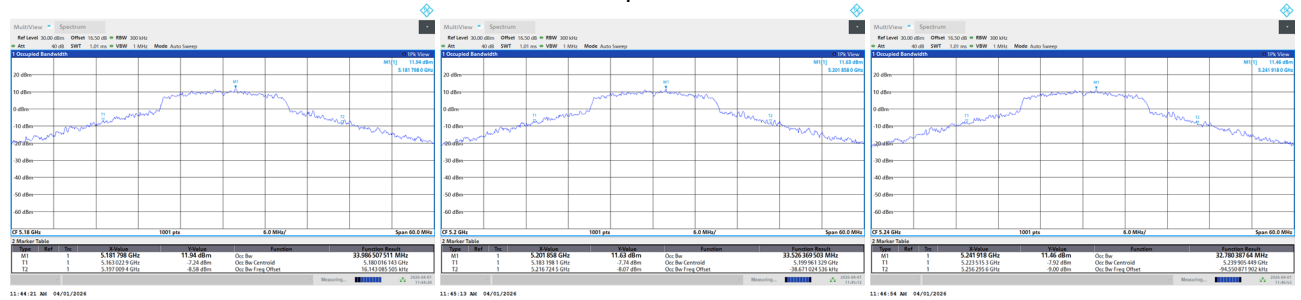


Test Mode	UNII-1_TX AC(VHT40) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	79.800	45.682
46	5230	76.800	43.816



CH38

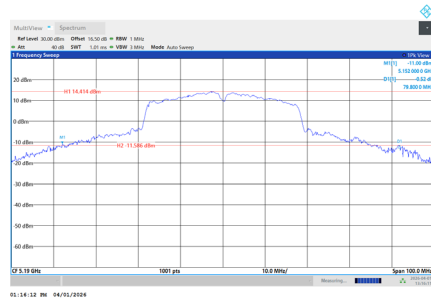

CH46
26 dB Bandwidth

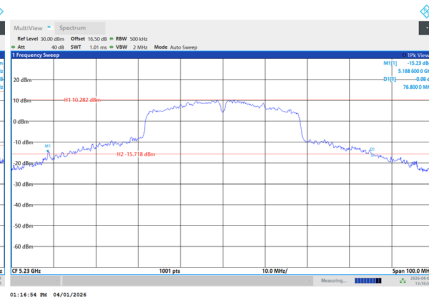

99 % Occupied Bandwidth

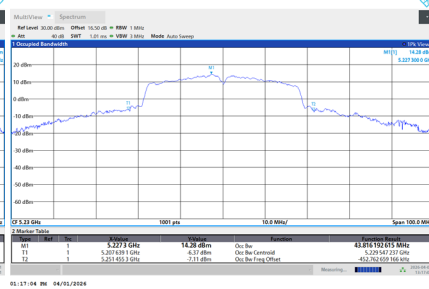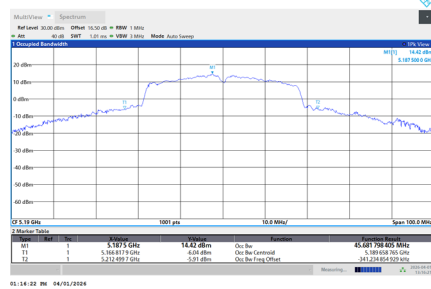


Test Mode	UNII-1_TX AX(HE20) Mode
-----------	-------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	47.100	34.030
40	5200	46.200	33.351
48	5240	46.140	32.438


CH36

CH40
26 dB Bandwidth

CH48

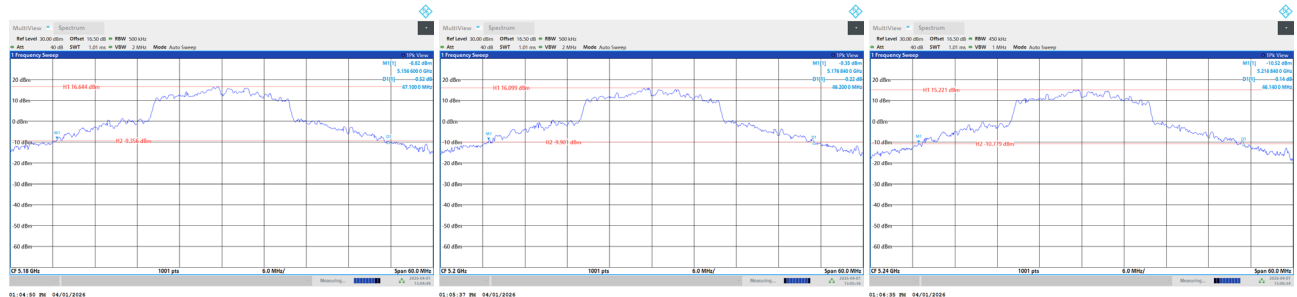

99 % Occupied Bandwidth

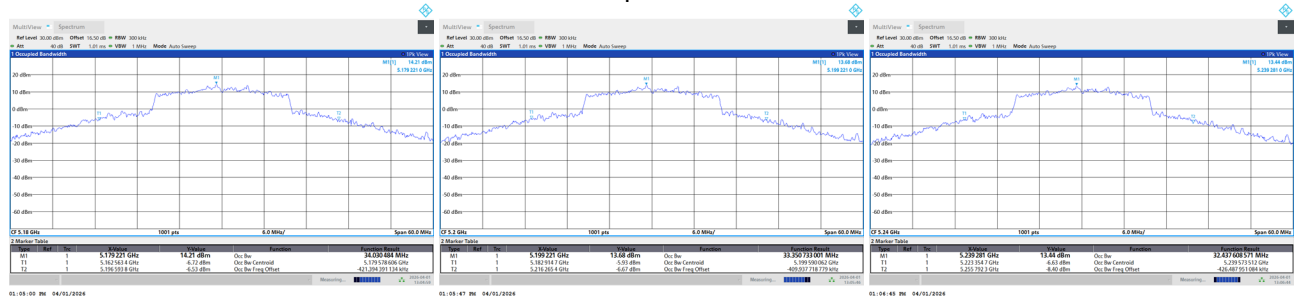


Test Mode	UNII-2A_TX A Mode
-----------	-------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	46.500	30.899
60	5300	47.520	31.379
64	5320	46.920	30.998


CH52

CH60
26 dB Bandwidth

CH64

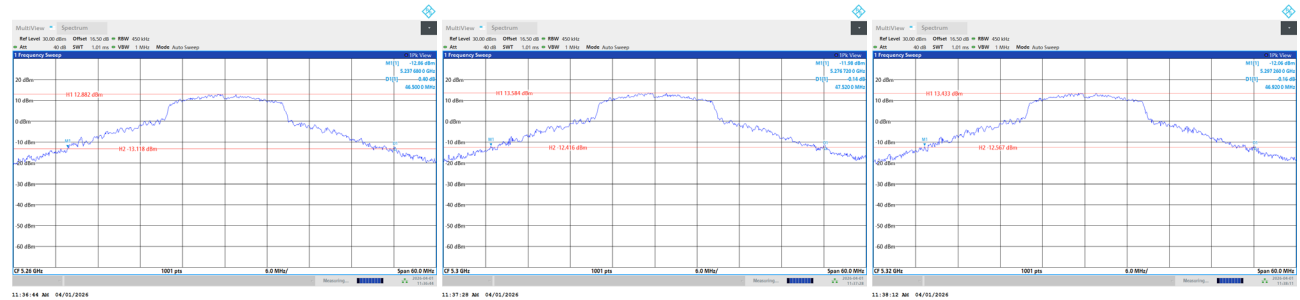

99 % Occupied Bandwidth

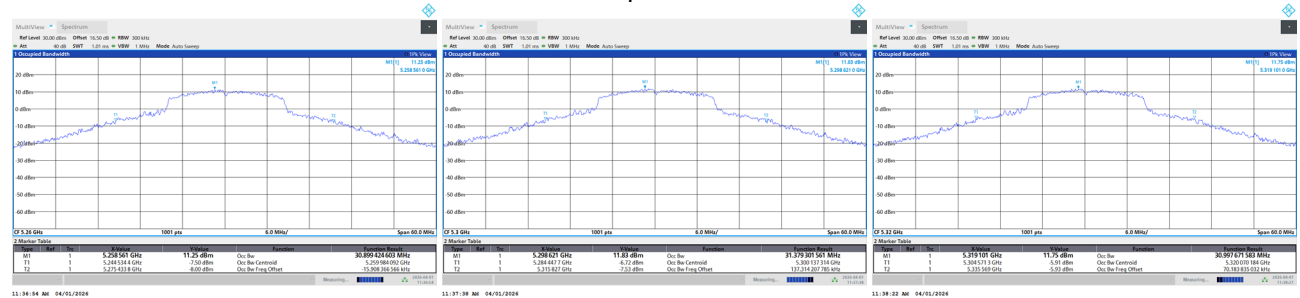


Test Mode	UNII-2A_TX AC(VHT20) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	47.940	32.482
60	5300	47.640	32.814
64	5320	47.760	32.455


CH52

CH60
26 dB Bandwidth

CH64

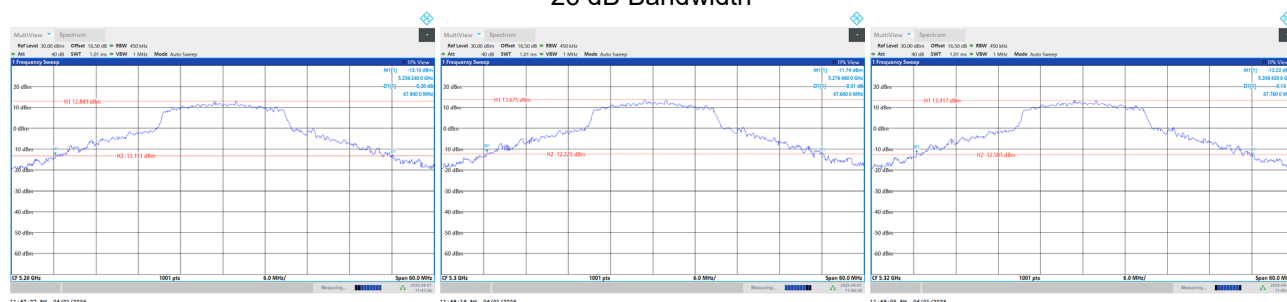

99 % Occupied Bandwidth

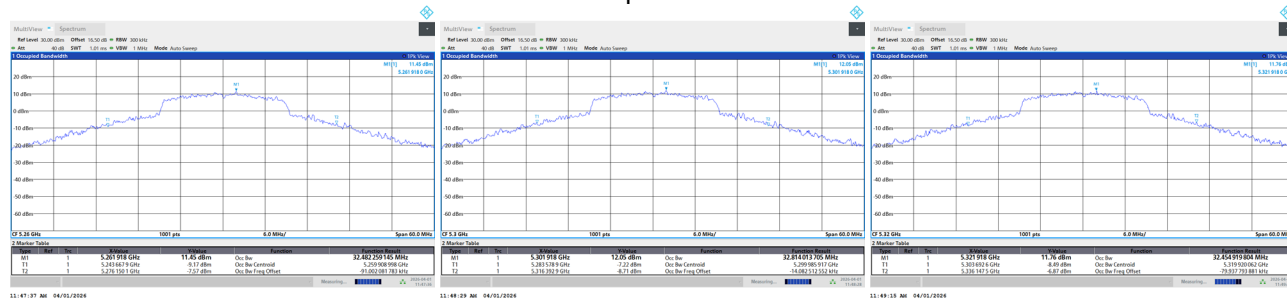


Test Mode	UNII-2A_TX AC(VHT40) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	69.300	38.659
62	5310	76.100	41.505

CH54

CH62
26 dB Bandwidth

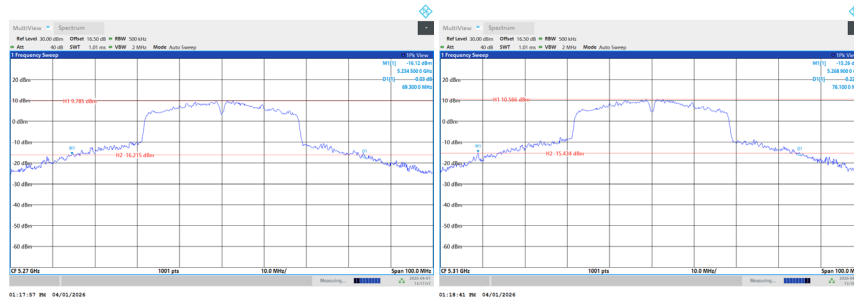

99 % Occupied Bandwidth

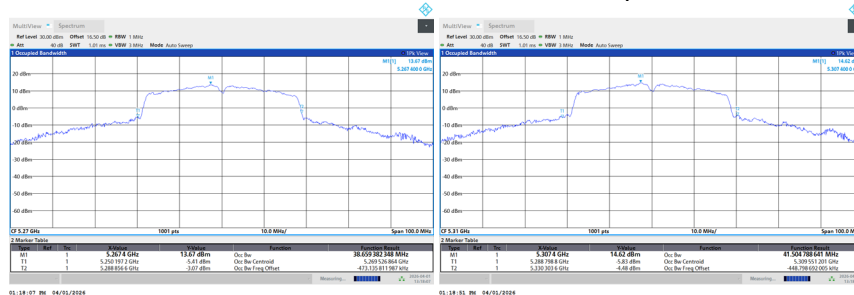


Test Mode	UNII-2A_TX AX(HE20) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	46.080	32.115
60	5300	46.800	33.769
64	5320	46.320	33.649


CH52

CH60
26 dB Bandwidth

CH64

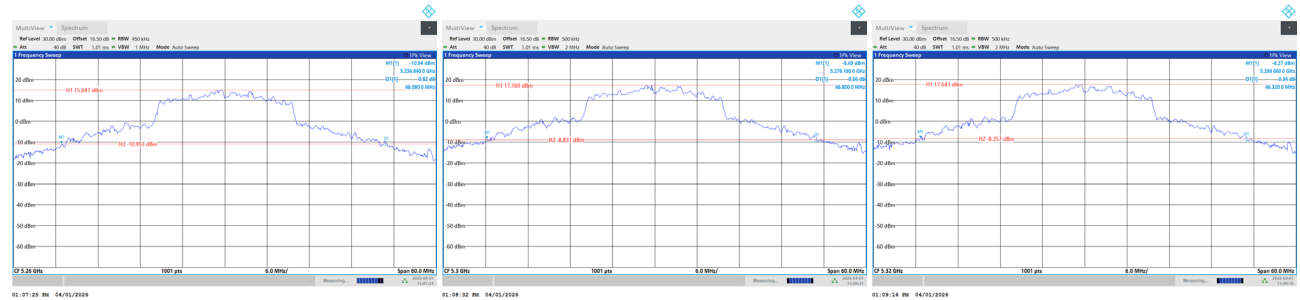

99 % Occupied Bandwidth

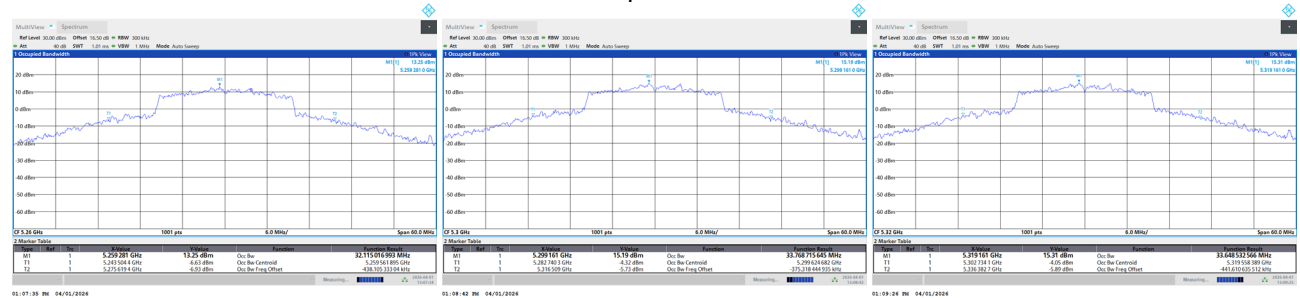


Test Mode	UNII-2C_TX A Mode
-----------	-------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	44.460	29.886
116	5580	46.200	29.801
140	5700	46.380	30.191


CH100

CH116
26 dB Bandwidth

CH140

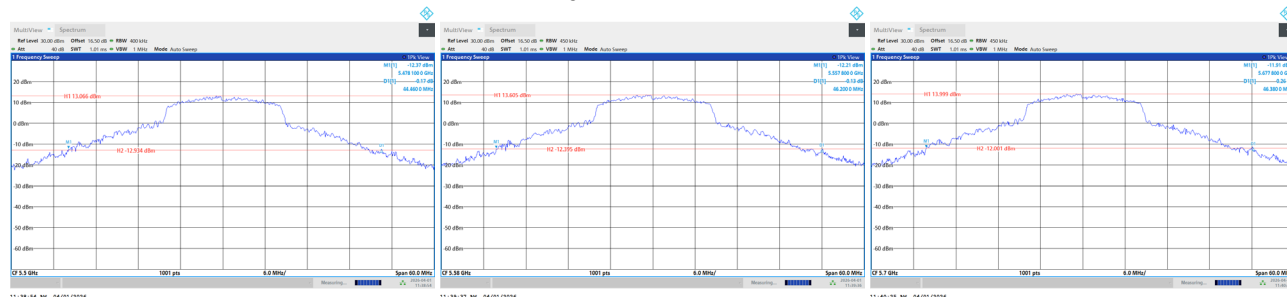


99 % Occupied Bandwidth

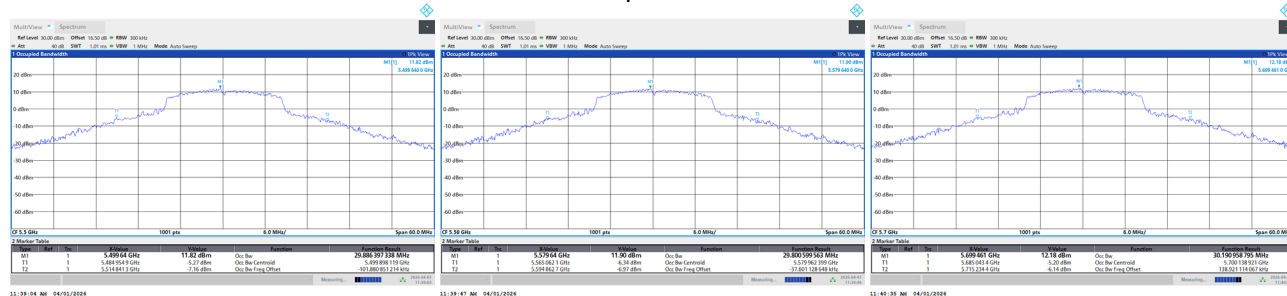


Test Mode	UNII-2C_TX AC(VHT20) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	46.020	30.936
116	5580	45.540	31.126
140	5700	45.540	31.359


CH100

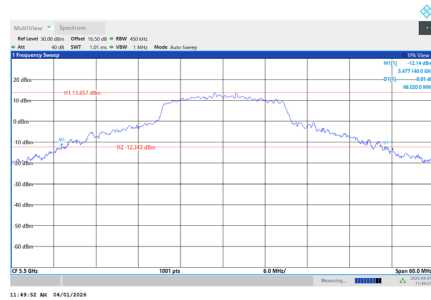




CH116
26 dB Bandwidth

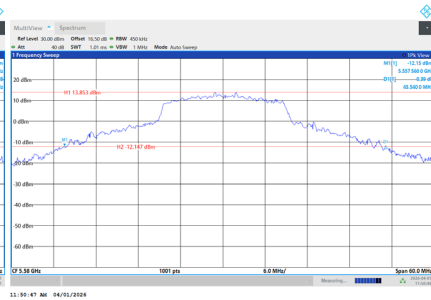

CH140

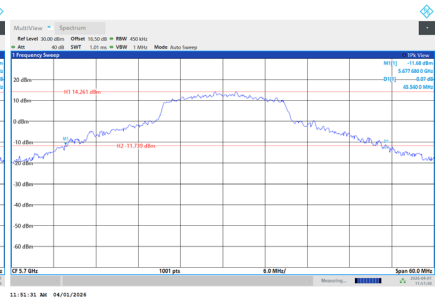

99 % Occupied Bandwidth

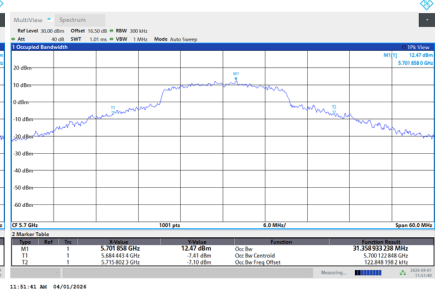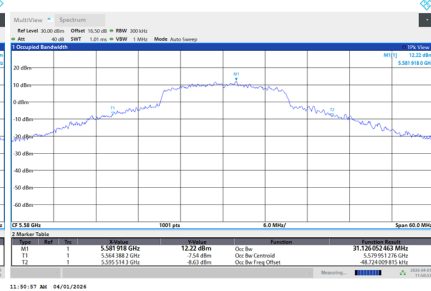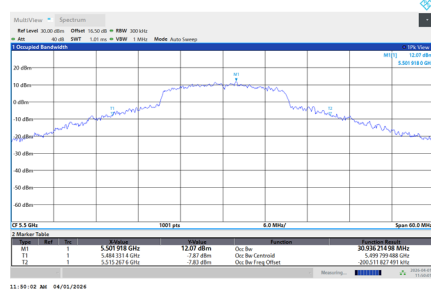

Test Mode	UNII-2C_TX AC(VHT40) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
102	5510	69.000	37.436
110	5550	69.000	37.770
134	5670	70.100	37.817


CH102

CH110
26 dB Bandwidth

CH134



99 % Occupied Bandwidth

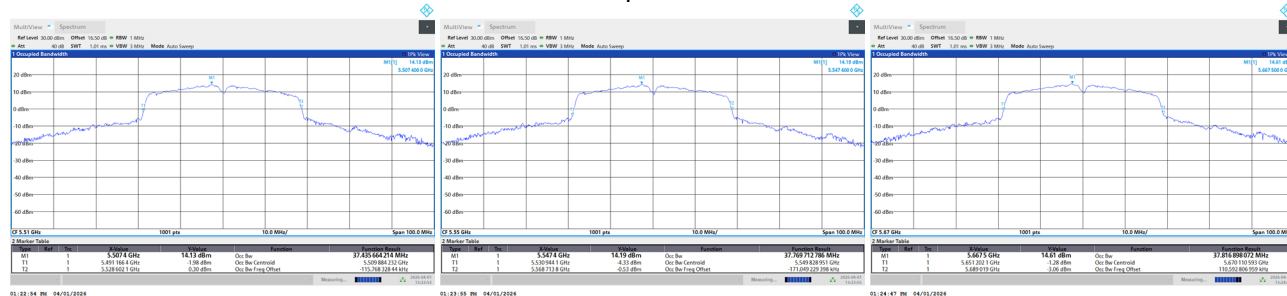

Test Mode UNII-2C_TX AX(HE20) Mode

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	45.600	32.219
116	5580	46.140	32.638
140	5700	46.560	33.555


CH100






CH116
26 dB Bandwidth



CH140

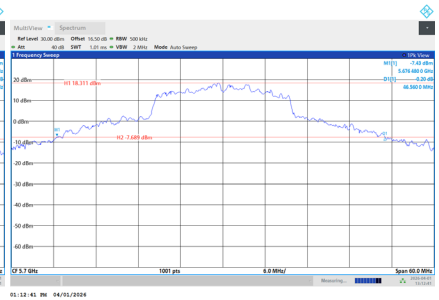

99 % Occupied Bandwidth

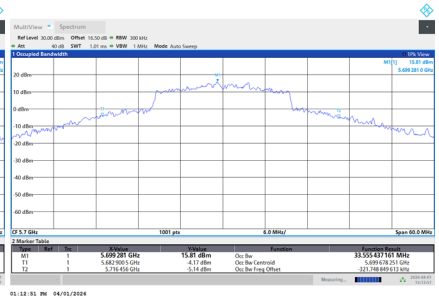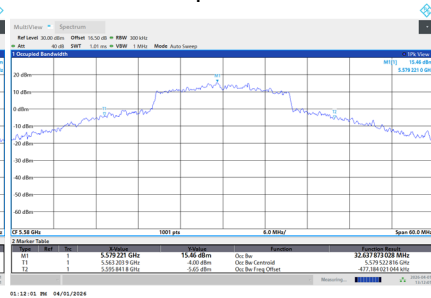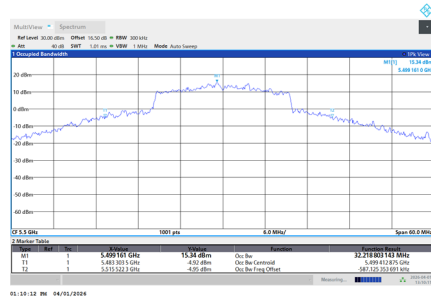


Test Mode	UNII-3_TX A Mode
-----------	------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
149	5745	15.720	29.445	0.5	Pass
157	5785	15.660	29.132	0.5	Pass
165	5825	15.660	29.461	0.5	Pass


CH149

CH157
6 dB Bandwidth

CH165

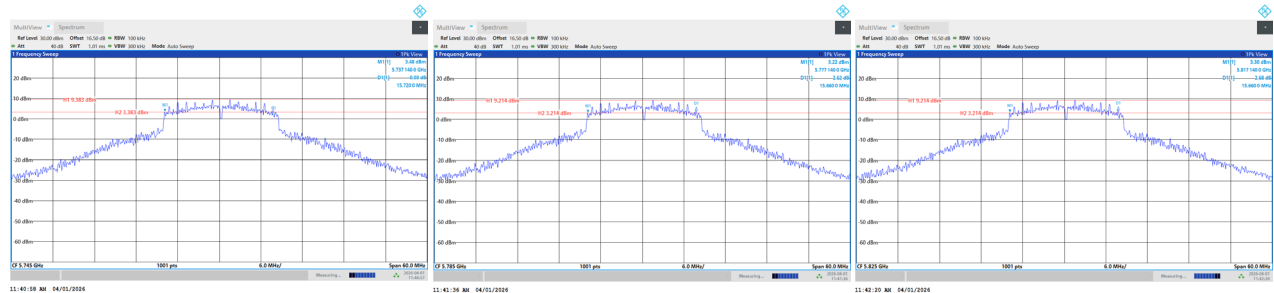

99 % Occupied Bandwidth

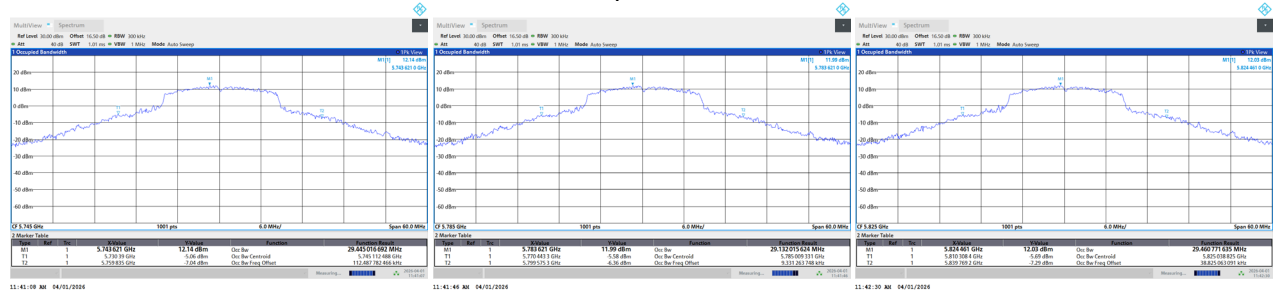


Test Mode	UNII-3_TX AC(VHT20) Mode
-----------	--------------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
149	5745	16.080	30.287	0.5	Pass
157	5785	16.020	30.167	0.5	Pass
165	5825	16.020	30.448	0.5	Pass


CH149

CH157
6 dB Bandwidth

CH165

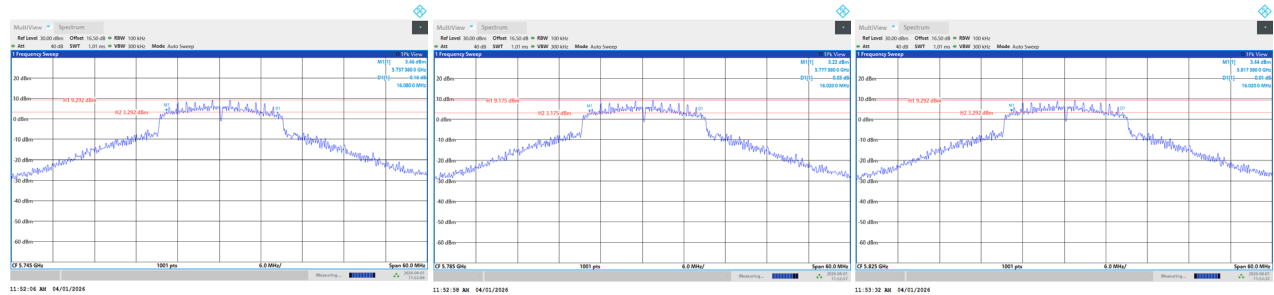


99 % Occupied Bandwidth

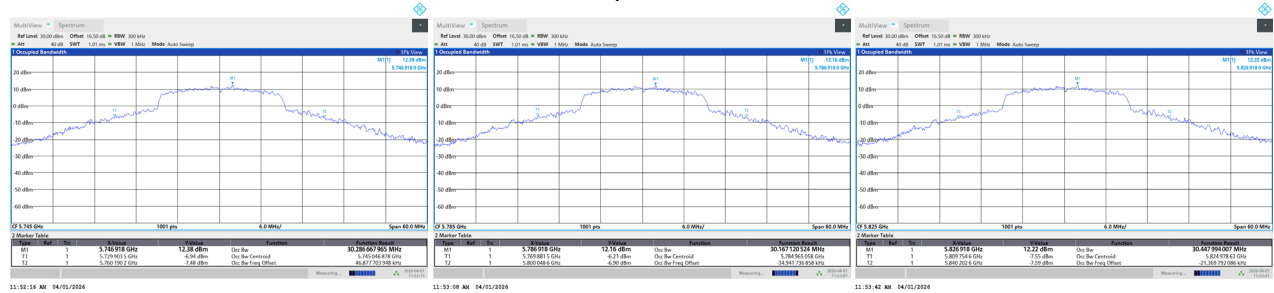


Test Mode UNII-3_TX AC(VHT40) Mode

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
151	5755	30.100	40.041	0.5	Pass
159	5795	30.100	41.487	0.5	Pass

CH151

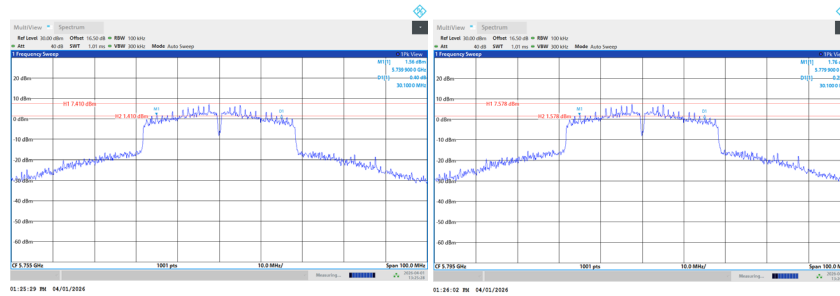

CH159
6 dB Bandwidth

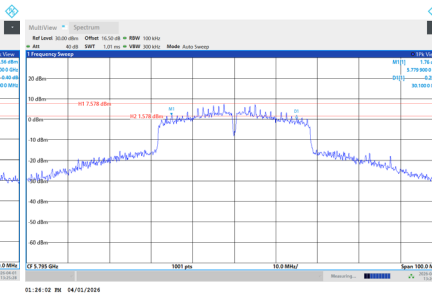

99 % Occupied Bandwidth

