

## Appendix: 5G WIFI

Contents

Contents ..... 2

Duty Cycle ..... 3

Maximum Conducted Output Power ..... 18

-26dB Bandwidth ..... 19

Occupied Channel Bandwidth ..... 27


Maximum Power Spectral Density Level ..... 42

Frequency Stability ..... 57


-6dB Bandwidth ..... 173

## Duty Cycle


| Condition | Mode | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|------|-----------------|---------|----------------|------------------------|-----------|
| NVNT      | a    | 5180            | Ant1    | 88.83          | 0.51                   | 0.74      |
| NVNT      | a    | 5200            | Ant1    | 90.43          | 0.44                   | 0.74      |
| NVNT      | a    | 5240            | Ant1    | 89.89          | 0.46                   | 0.74      |
| NVNT      | a    | 5745            | Ant1    | 90.43          | 0.44                   | 0.74      |
| NVNT      | a    | 5785            | Ant1    | 90.43          | 0.44                   | 0.74      |
| NVNT      | a    | 5825            | Ant1    | 90.43          | 0.44                   | 0.74      |
| NVNT      | n20  | 5180            | Ant1    | 88.85          | 0.51                   | 0.87      |
| NVNT      | n20  | 5200            | Ant1    | 87.74          | 0.57                   | 0.87      |
| NVNT      | n20  | 5240            | Ant1    | 88.86          | 0.51                   | 0.87      |
| NVNT      | n20  | 5745            | Ant1    | 88.85          | 0.51                   | 0.87      |
| NVNT      | n20  | 5785            | Ant1    | 88.86          | 0.51                   | 0.87      |
| NVNT      | n20  | 5825            | Ant1    | 88.86          | 0.51                   | 0.87      |
| NVNT      | n40  | 5190            | Ant1    | 79.92          | 0.97                   | 1.75      |
| NVNT      | n40  | 5230            | Ant1    | 79.92          | 0.97                   | 1.75      |
| NVNT      | n40  | 5755            | Ant1    | 80.17          | 0.96                   | 1.74      |
| NVNT      | n40  | 5795            | Ant1    | 79.89          | 0.98                   | 1.75      |
| NVNT      | ac20 | 5180            | Ant1    | 88.92          | 0.51                   | 0.87      |
| NVNT      | ac20 | 5200            | Ant1    | 88.92          | 0.51                   | 0.87      |
| NVNT      | ac20 | 5240            | Ant1    | 88.92          | 0.51                   | 0.87      |
| NVNT      | ac20 | 5745            | Ant1    | 88.31          | 0.54                   | 0.87      |
| NVNT      | ac20 | 5785            | Ant1    | 87.71          | 0.57                   | 0.87      |
| NVNT      | ac20 | 5825            | Ant1    | 88.92          | 0.51                   | 0.87      |
| NVNT      | ac40 | 5190            | Ant1    | 80.12          | 0.96                   | 1.72      |
| NVNT      | ac40 | 5230            | Ant1    | 79.1           | 1.02                   | 1.73      |
| NVNT      | ac40 | 5755            | Ant1    | 80.11          | 0.96                   | 1.72      |
| NVNT      | ac40 | 5795            | Ant1    | 80.11          | 0.96                   | 1.72      |
| NVNT      | ac80 | 5210            | Ant1    | 66.67          | 1.76                   | 3.47      |
| NVNT      | ac80 | 5775            | Ant1    | 66.67          | 1.76                   | 3.47      |

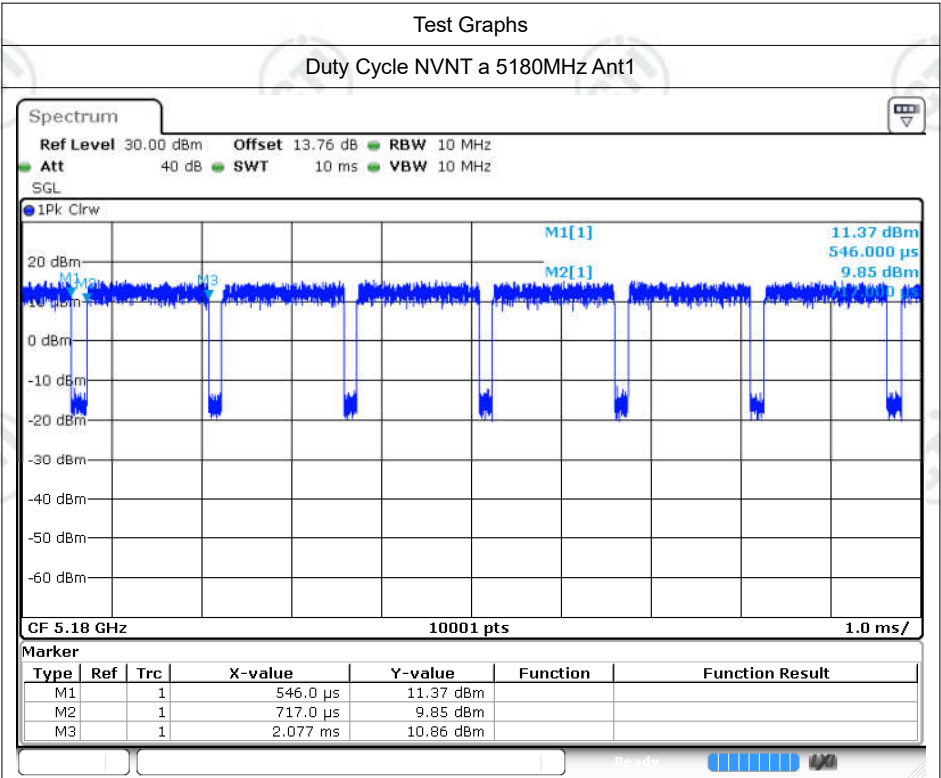


Date: 19.OCT.2023 13:25:46

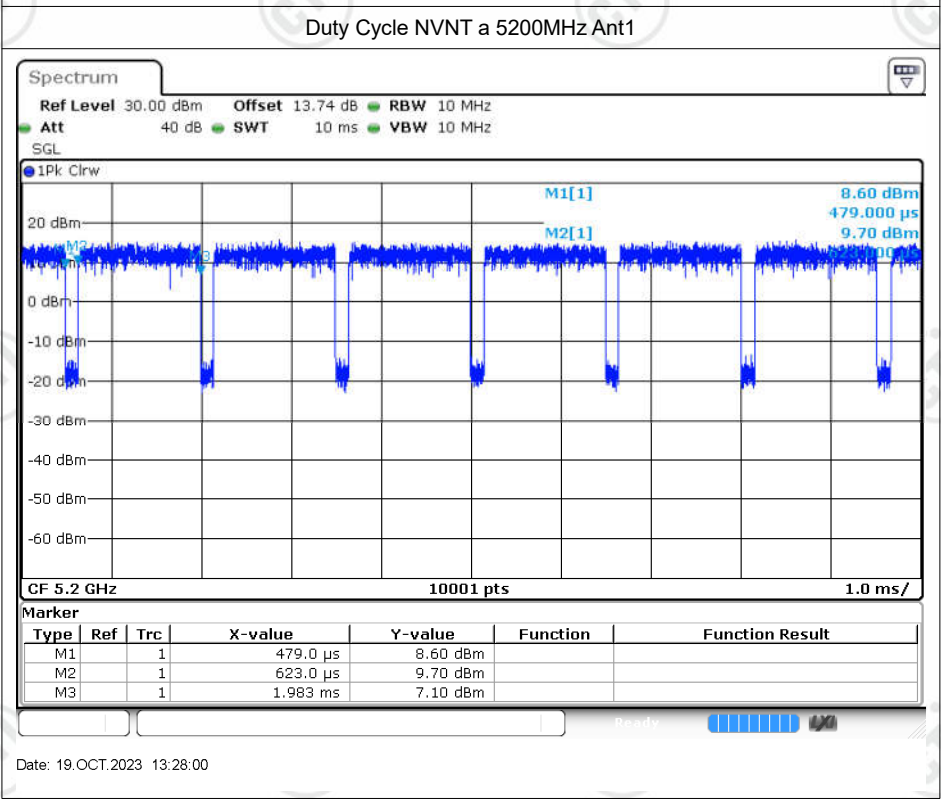


Date: 19.OCT.2023 13:28:00

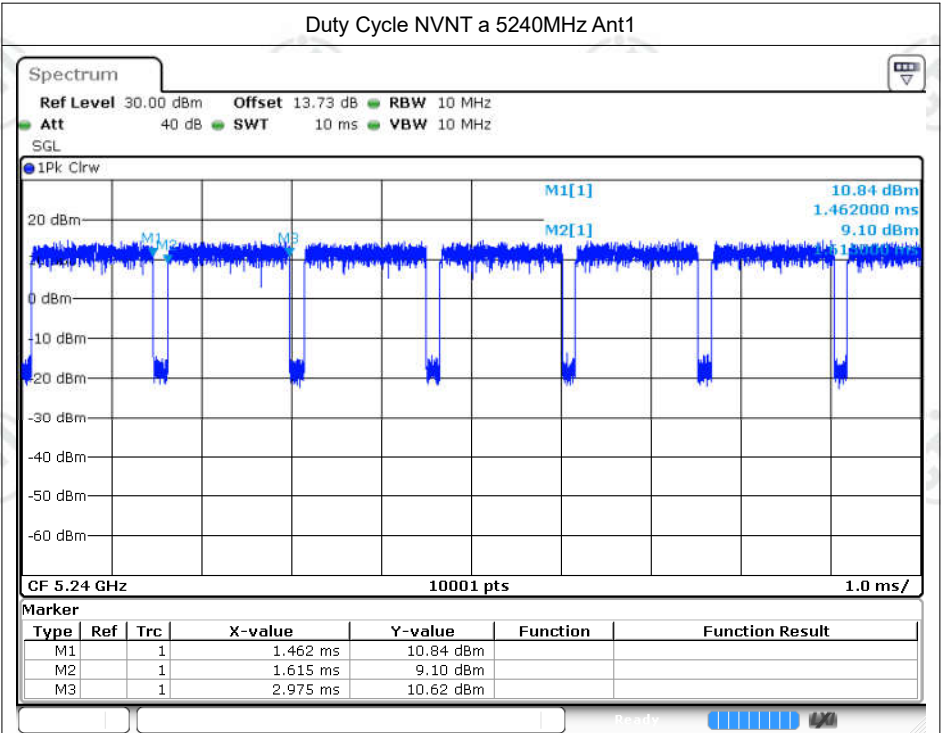


Date: 19.OCT.2023 13:29:29

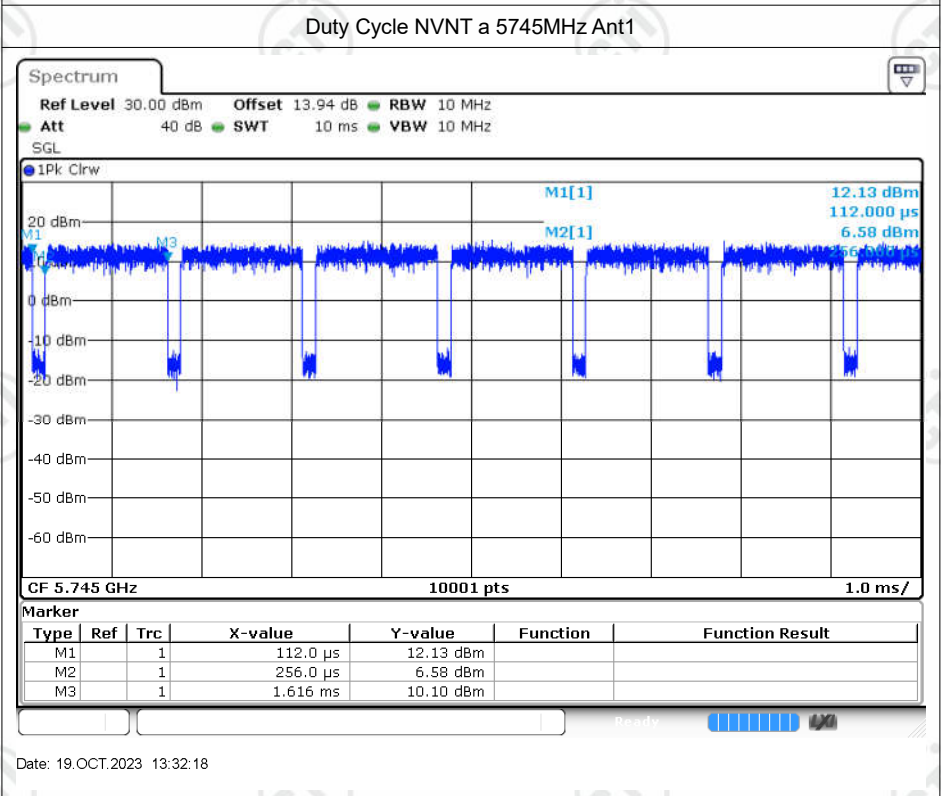


Date: 19.OCT.2023 13:32:18

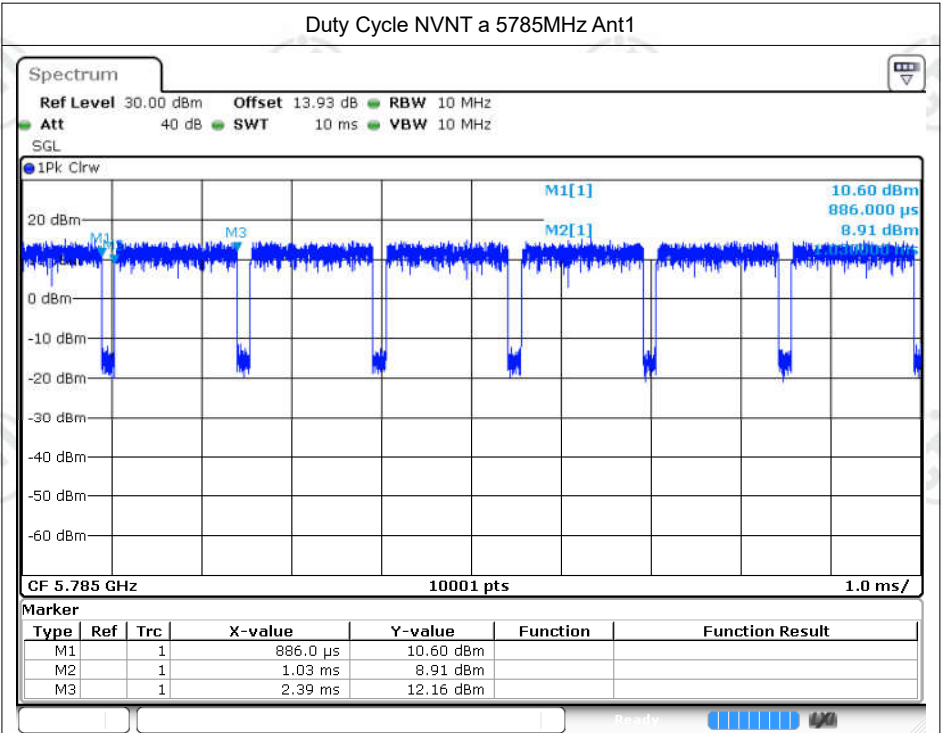


Date: 19.OCT.2023 13:36:13

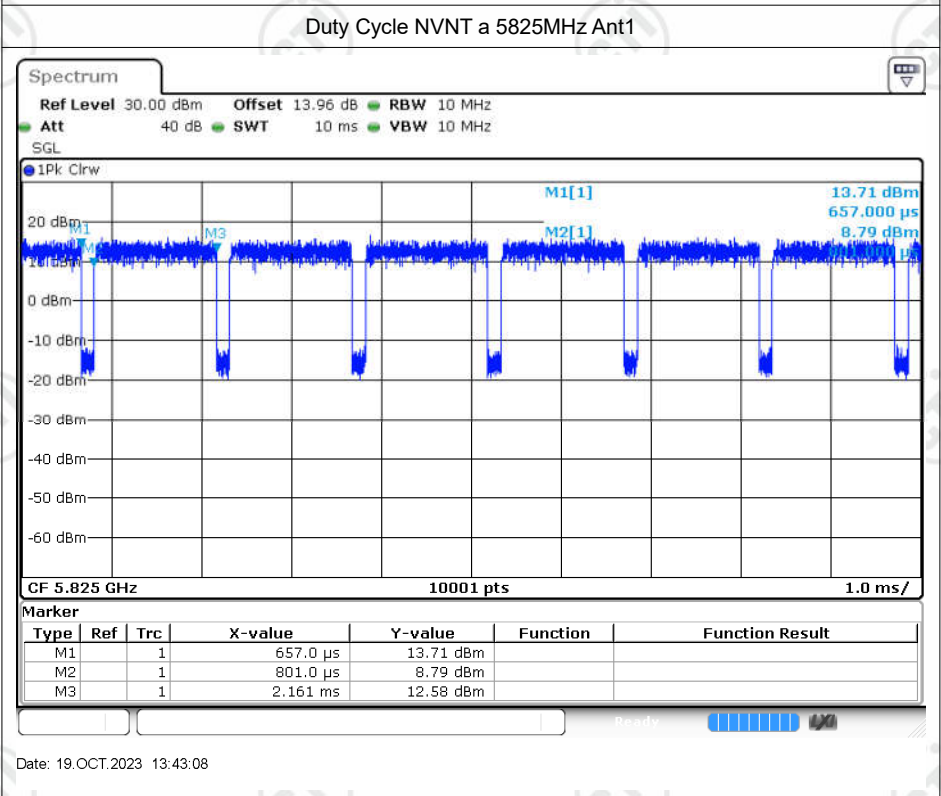


Date: 19.OCT.2023 13:43:08

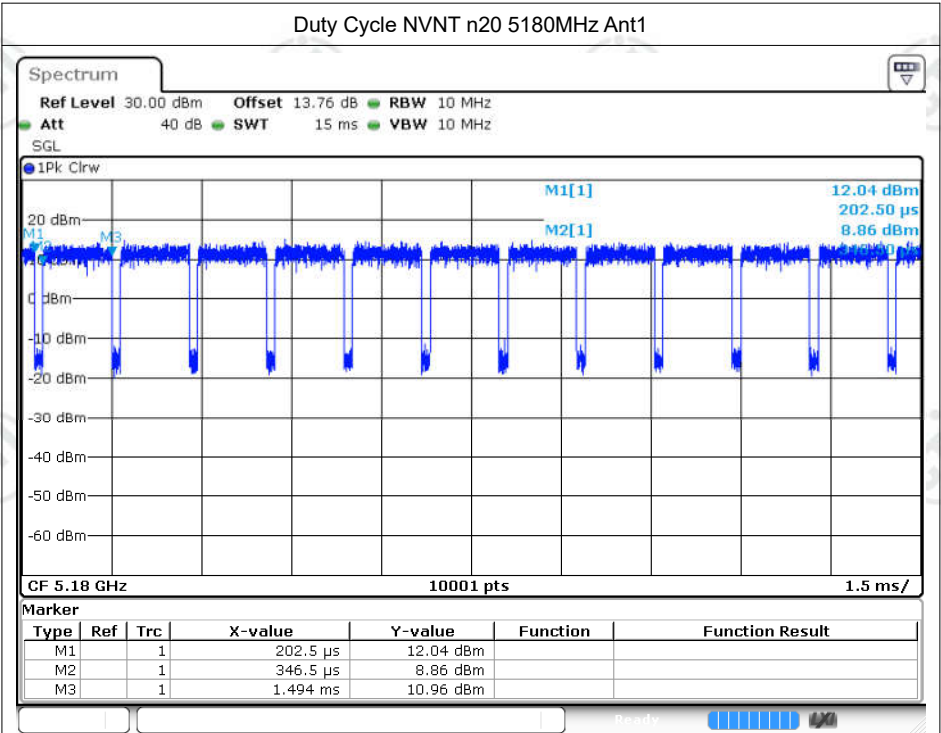


Date: 19.OCT.2023 13:45:28

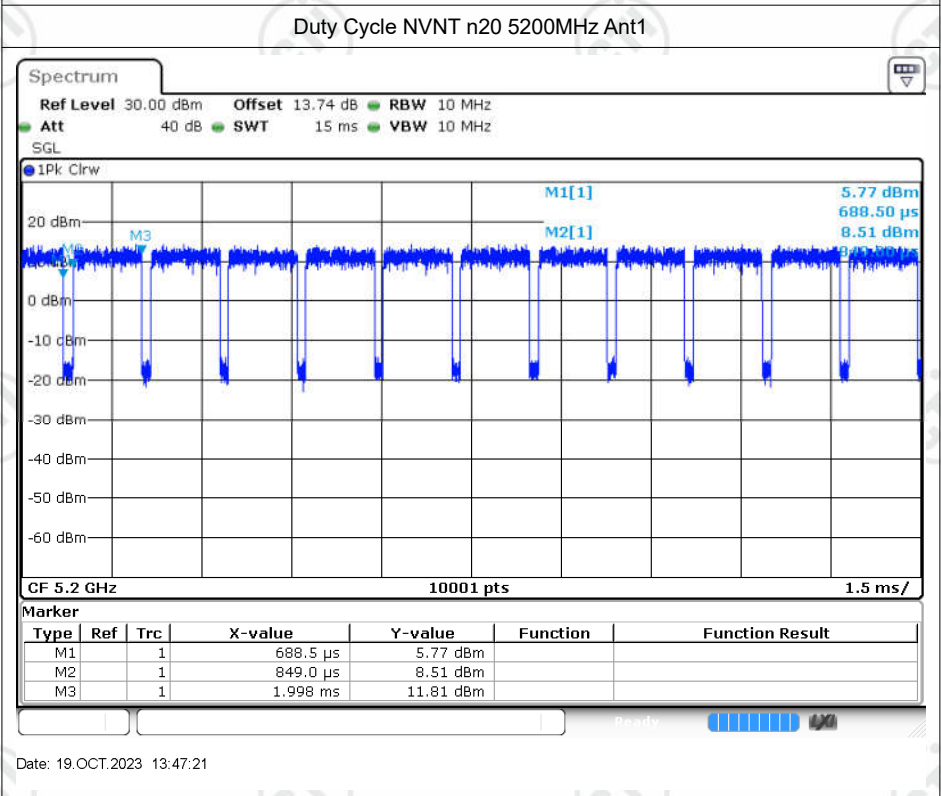


Date: 19.OCT.2023 13:47:21

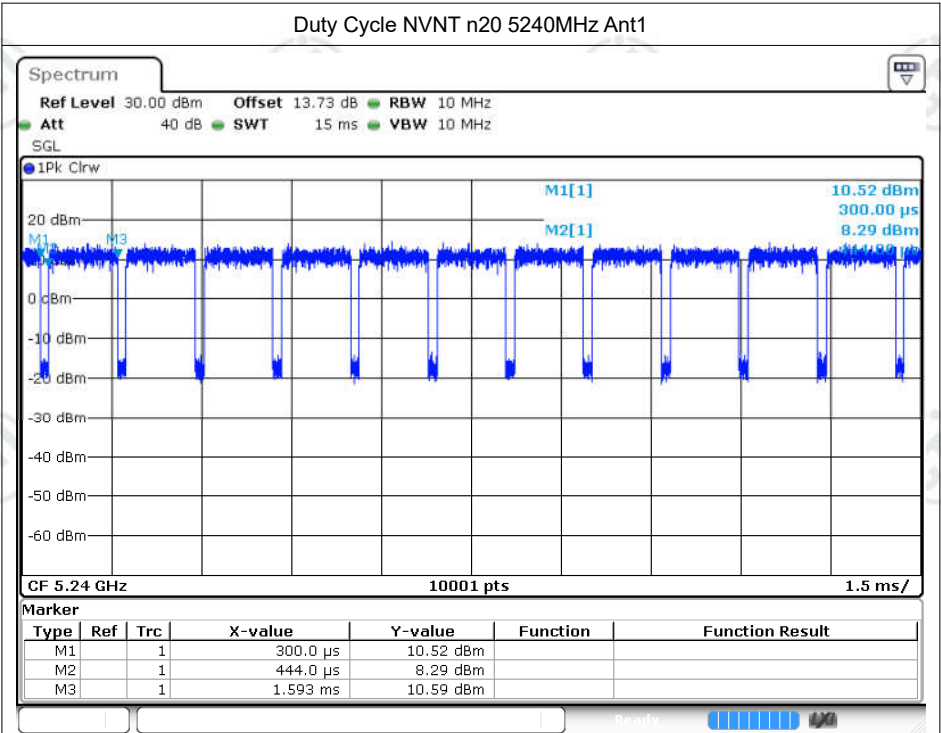


Date: 19.OCT.2023 13:48:44

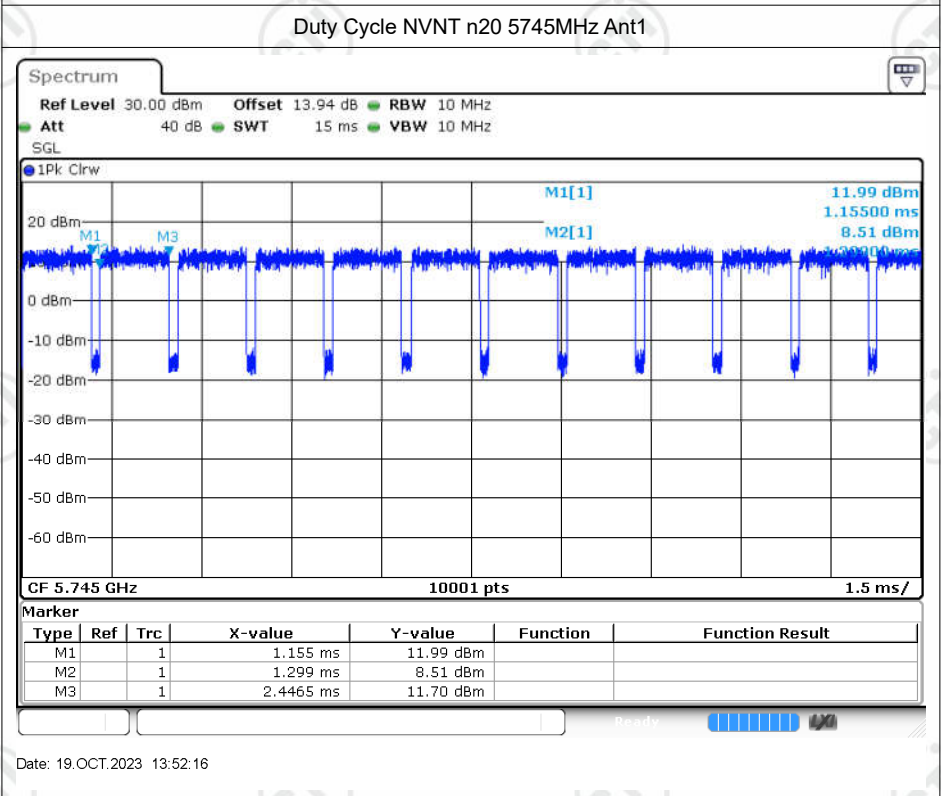


Date: 19.OCT.2023 13:52:16

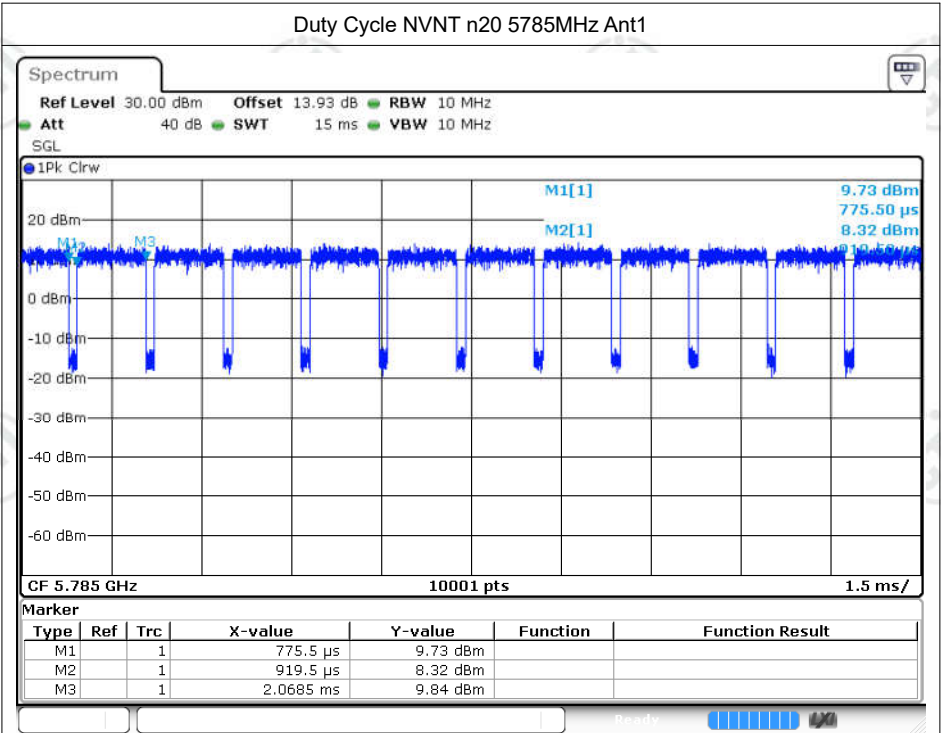


Date: 19.OCT.2023 13:54:44

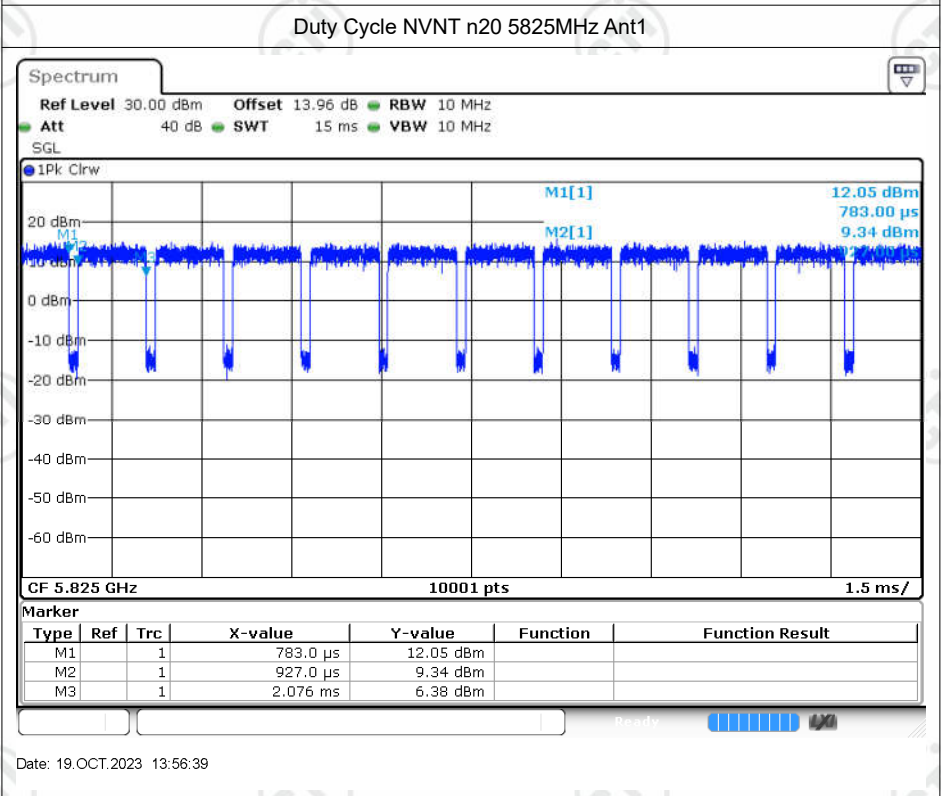


Date: 19.OCT.2023 13:56:39

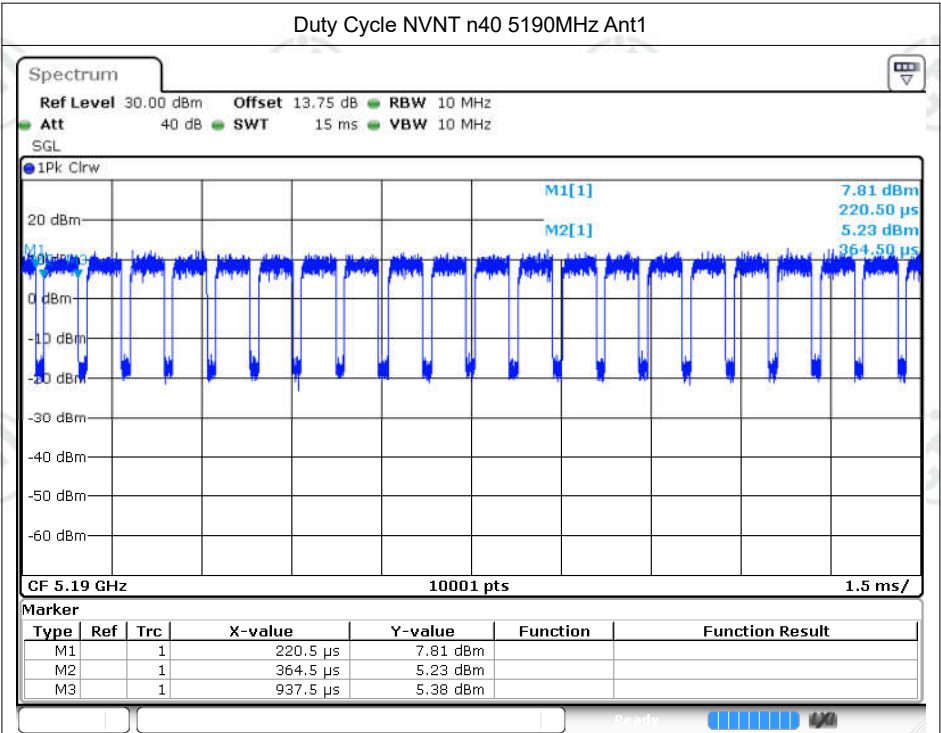


Date: 19.OCT.2023 14:03:59

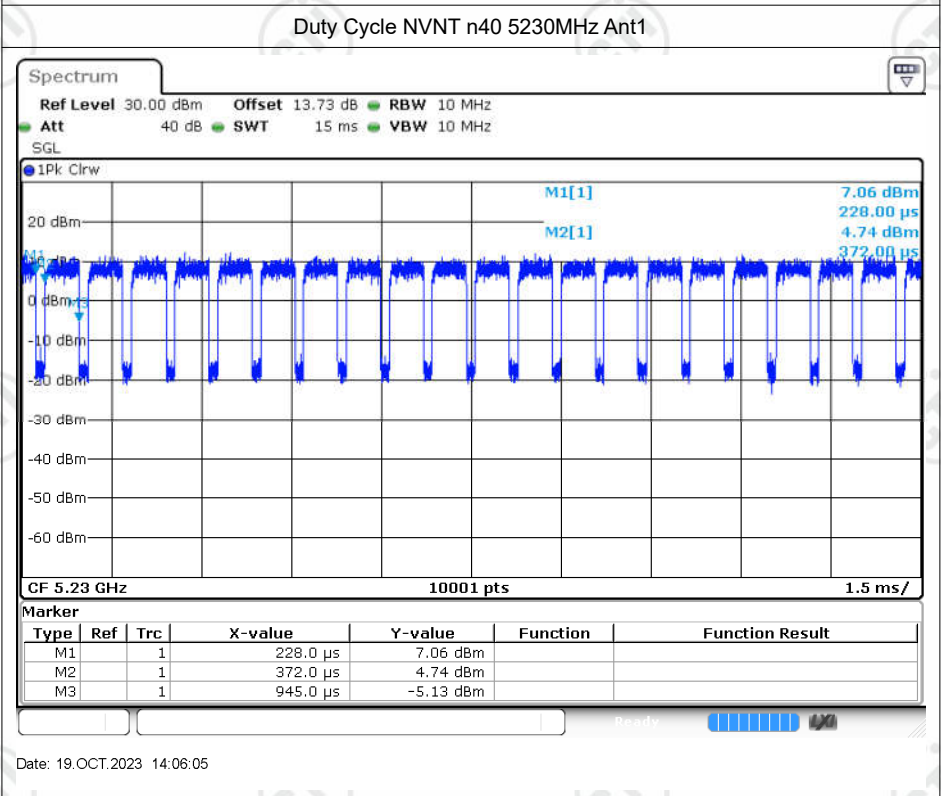


Date: 19.OCT.2023 14:06:05

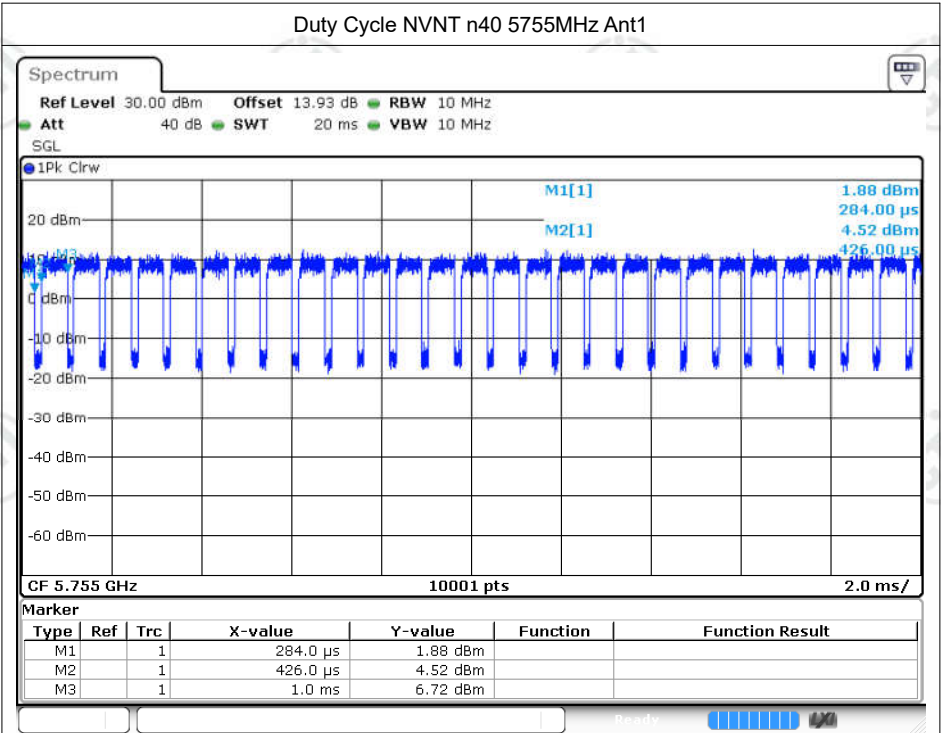


Date: 19.OCT.2023 14:08:31

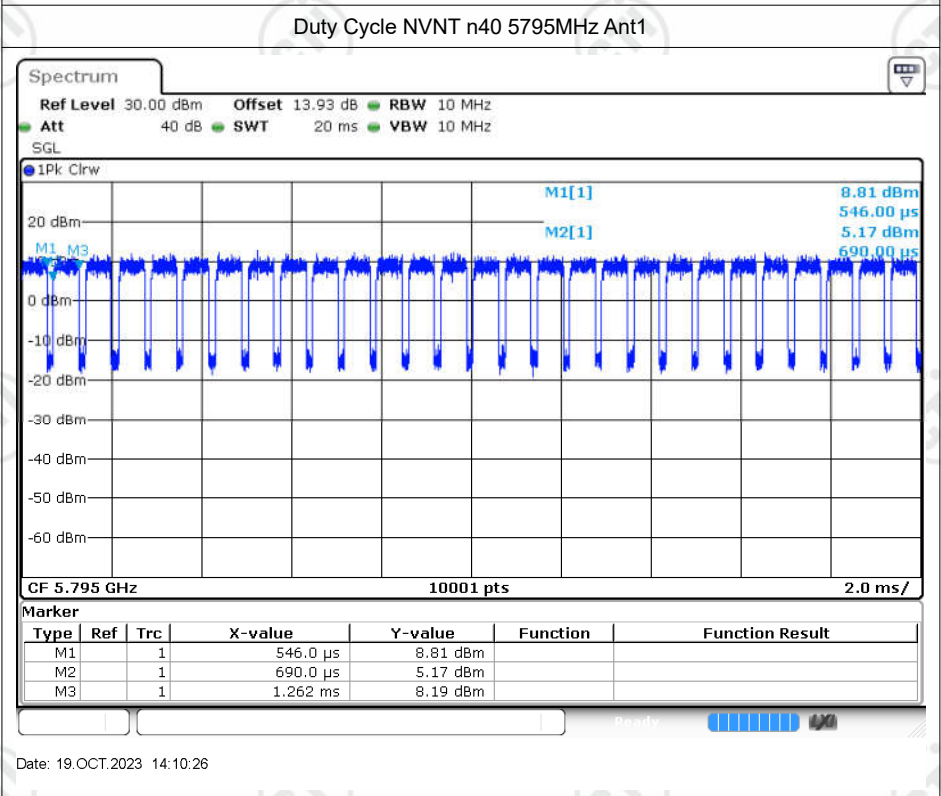


Date: 19.OCT.2023 14:10:26

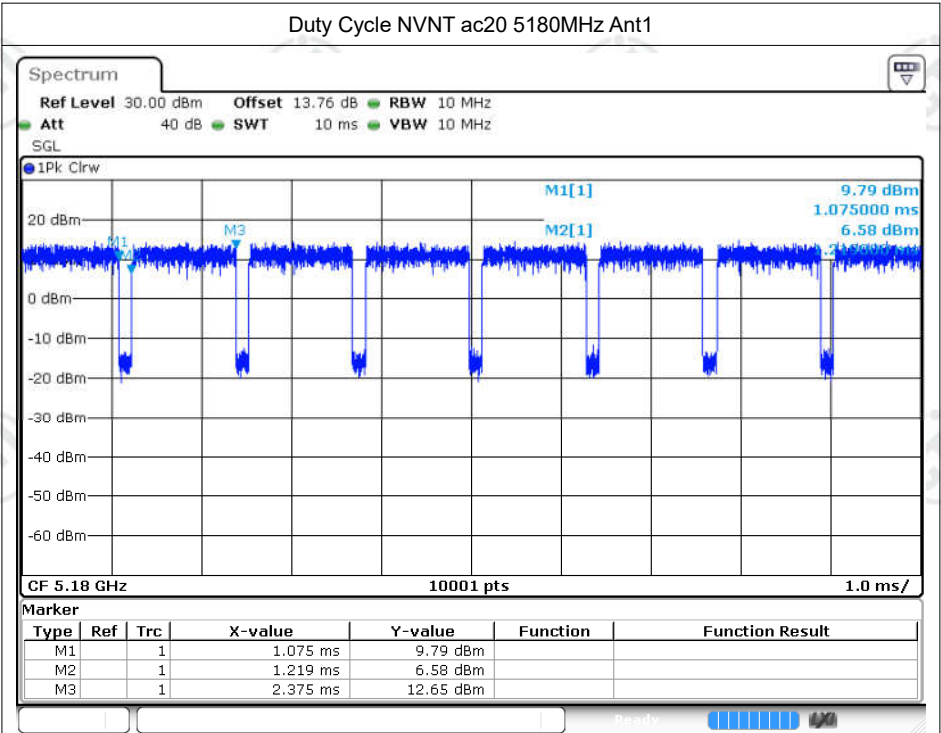


Date: 19.OCT.2023 14:12:58

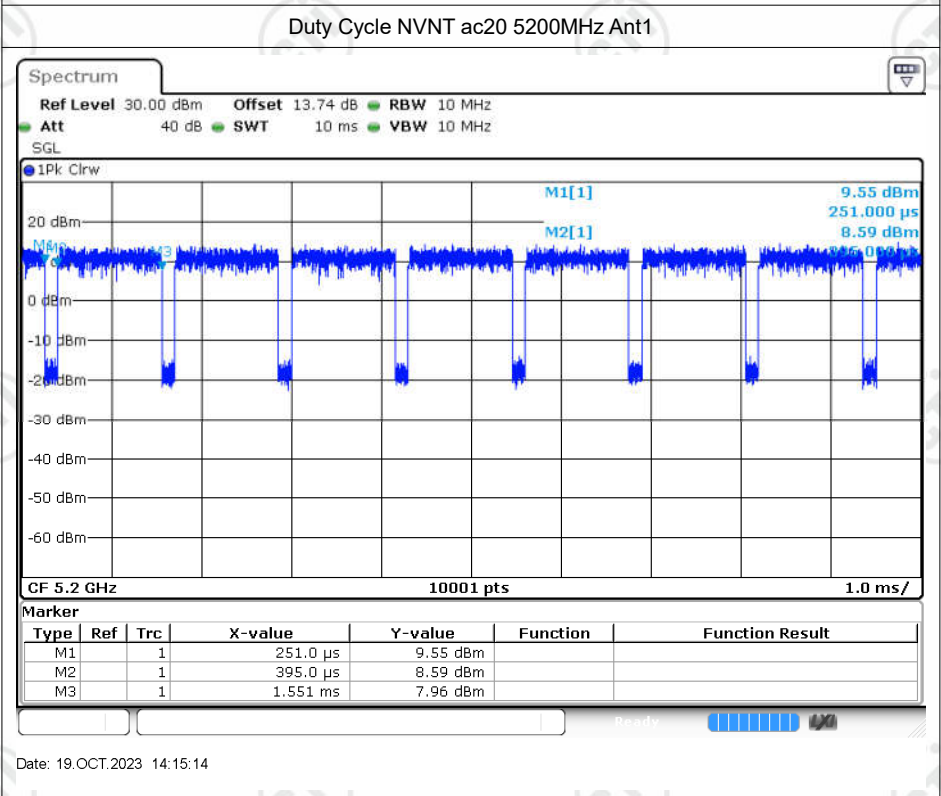


Date: 19.OCT.2023 14:15:14

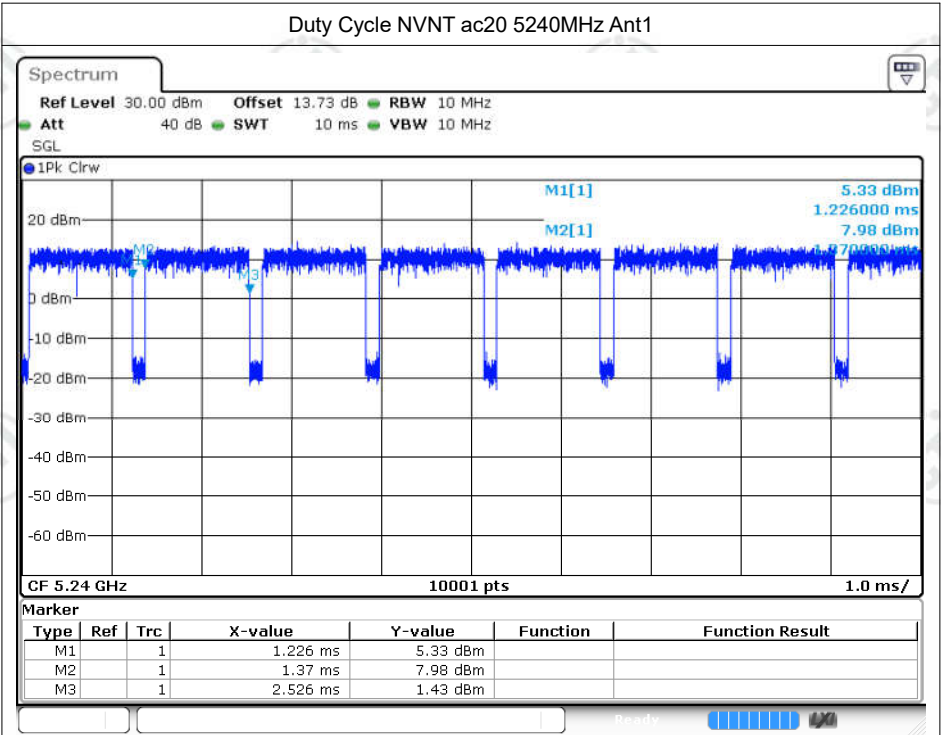


Date: 19.OCT.2023 14:17:00

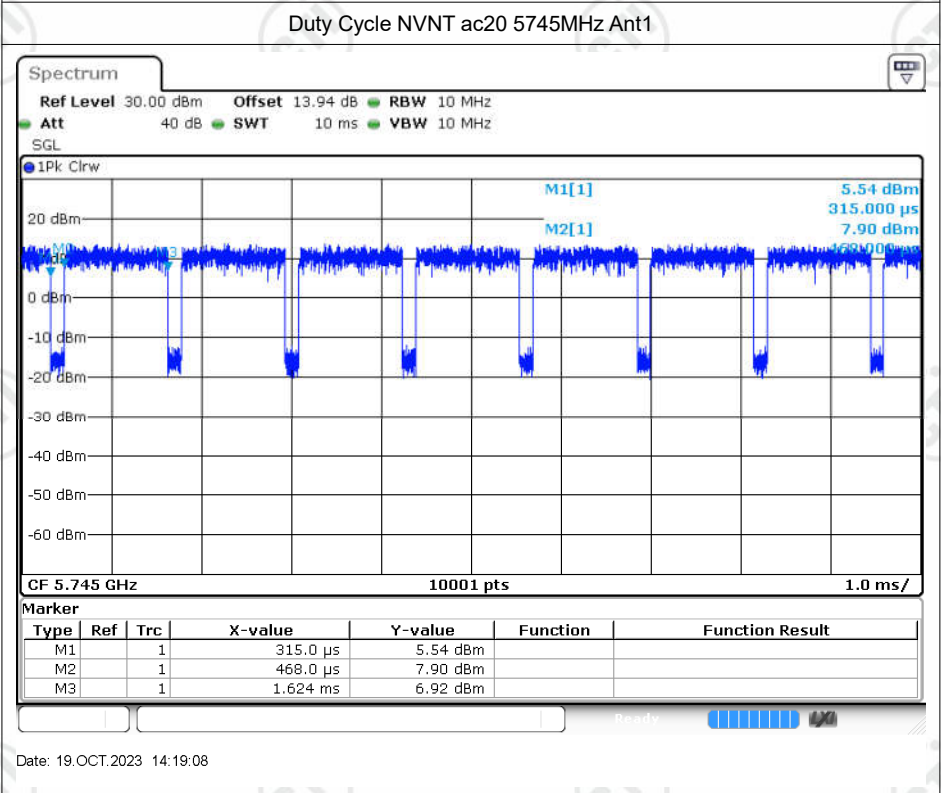


Date: 19.OCT.2023 14:19:08

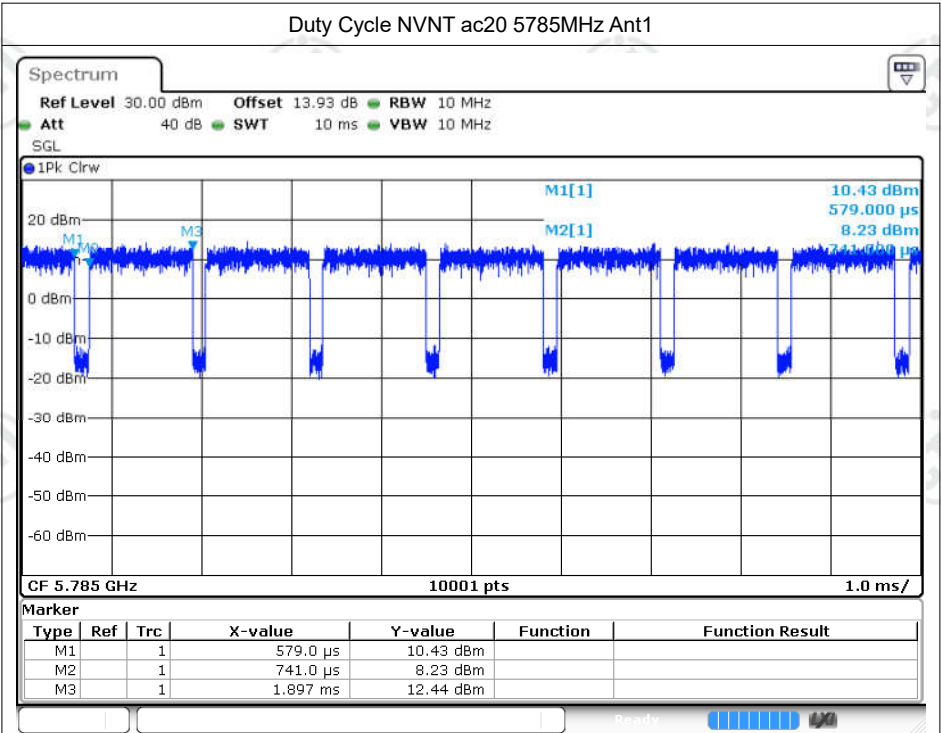


Date: 19.OCT.2023 14:21:26

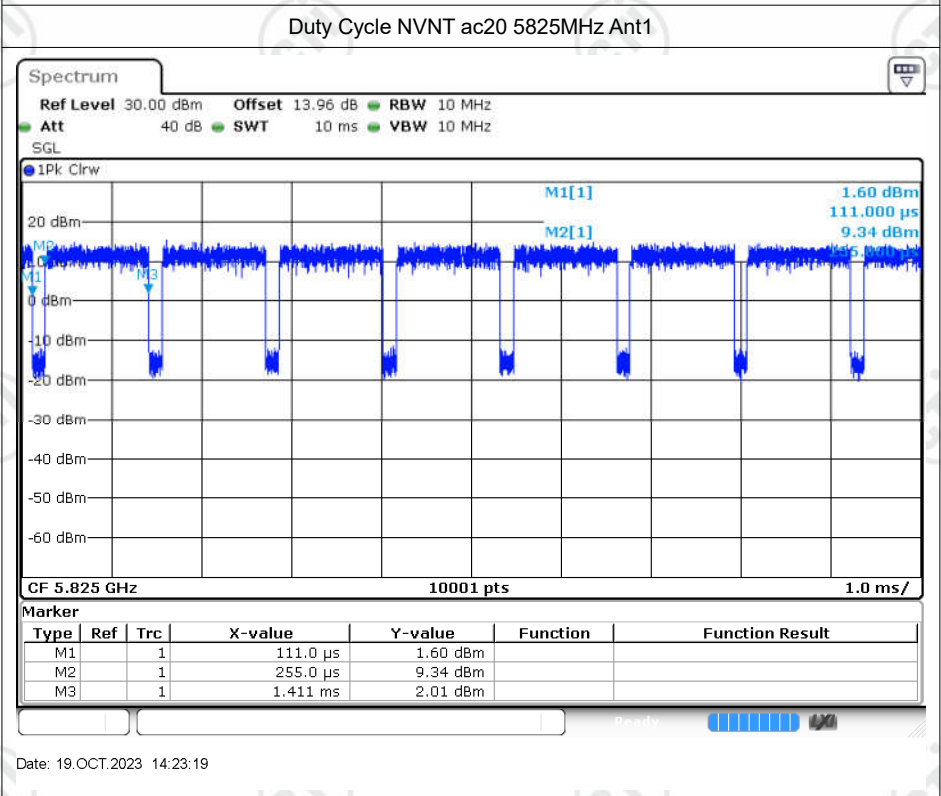


Date: 19.OCT.2023 14:23:19

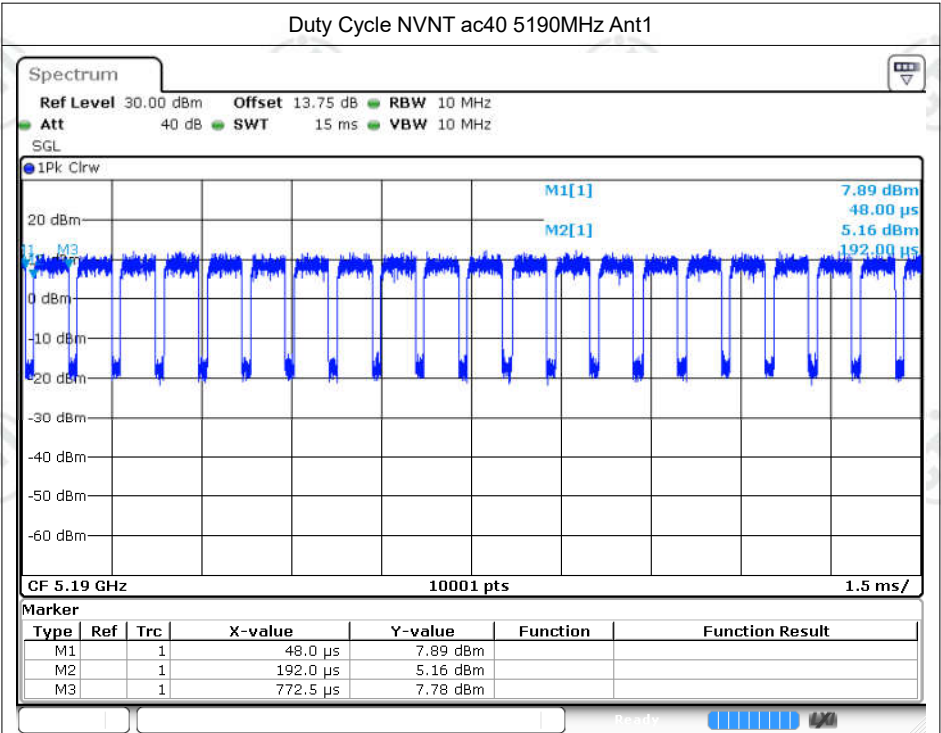


Date: 19.OCT.2023 14:26:20

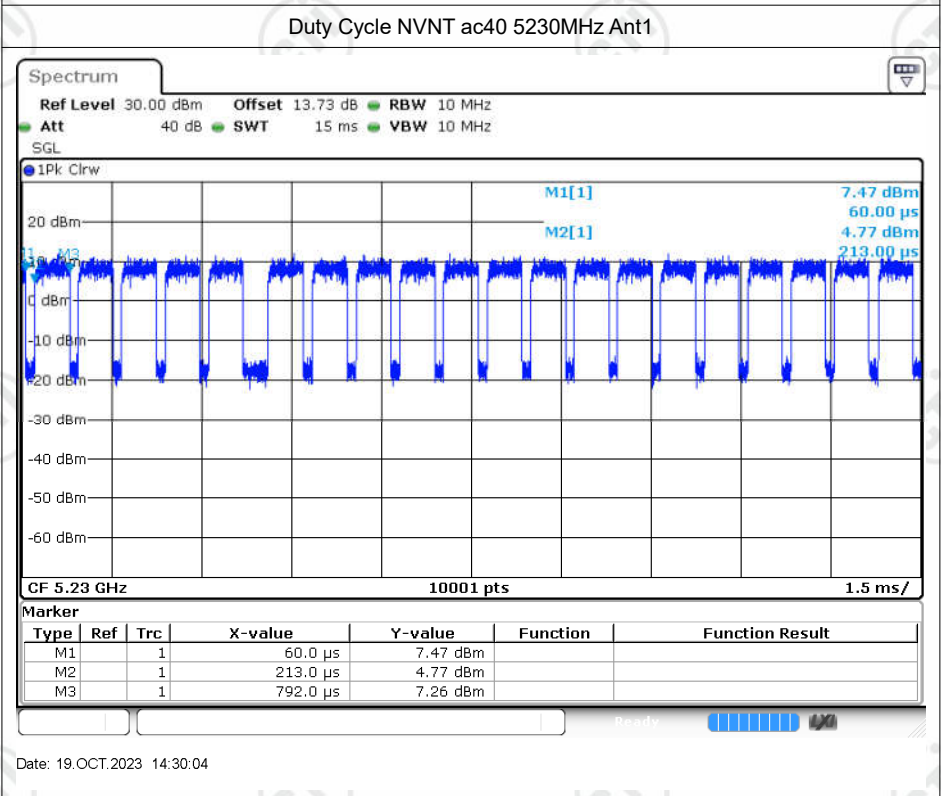


Date: 19.OCT.2023 14:30:04

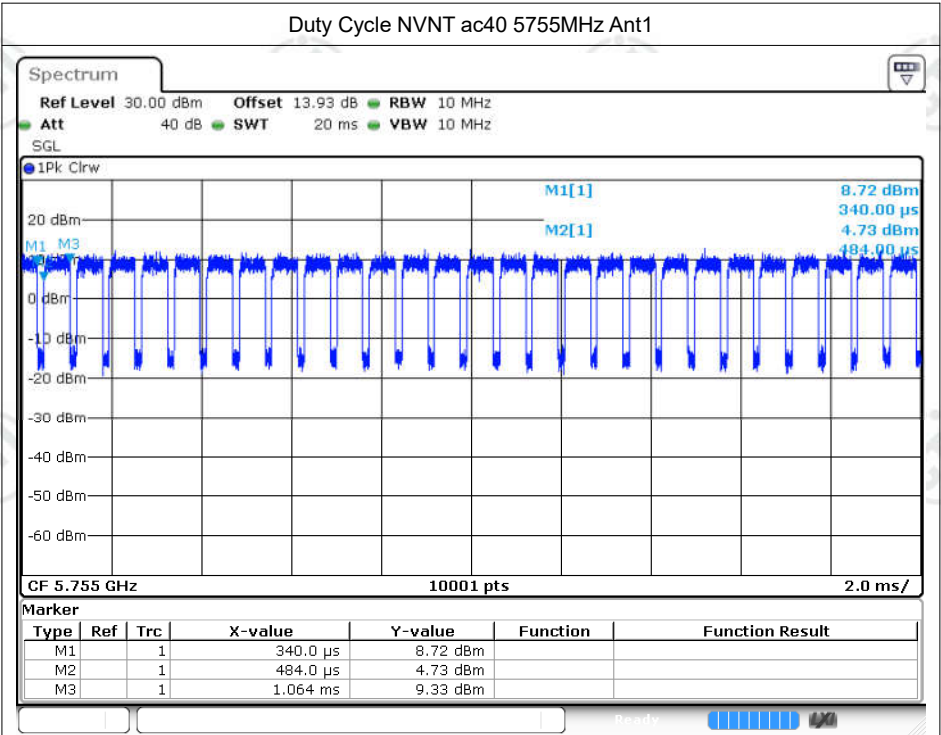


Date: 19.OCT.2023 14:35:00

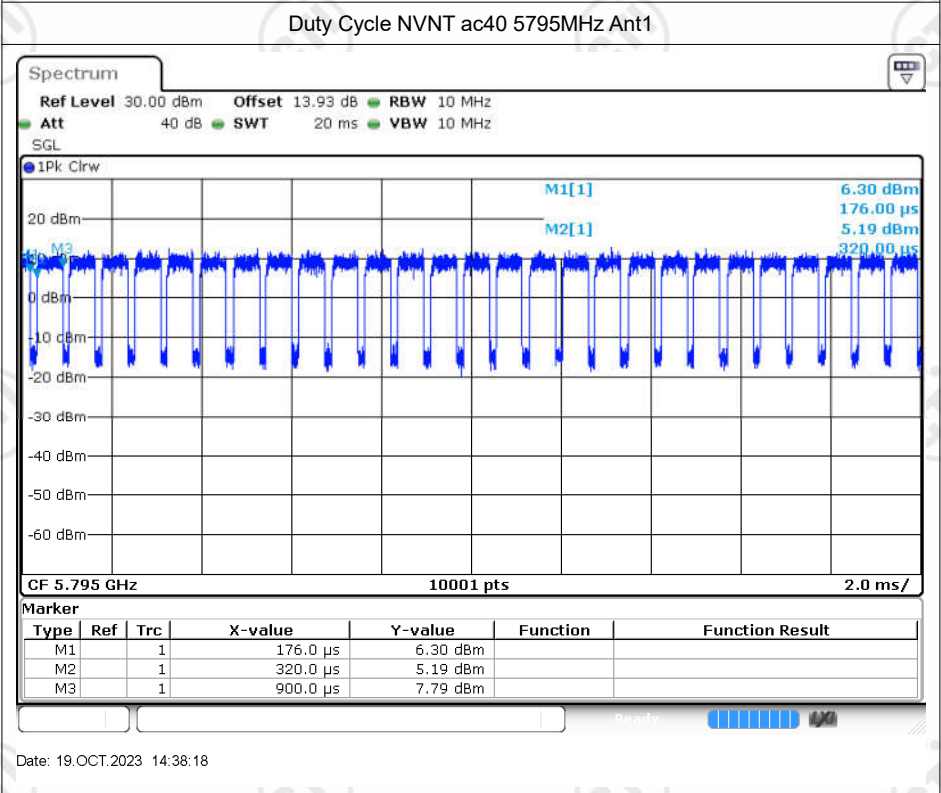

Date: 19.OCT.2023 14:38:18

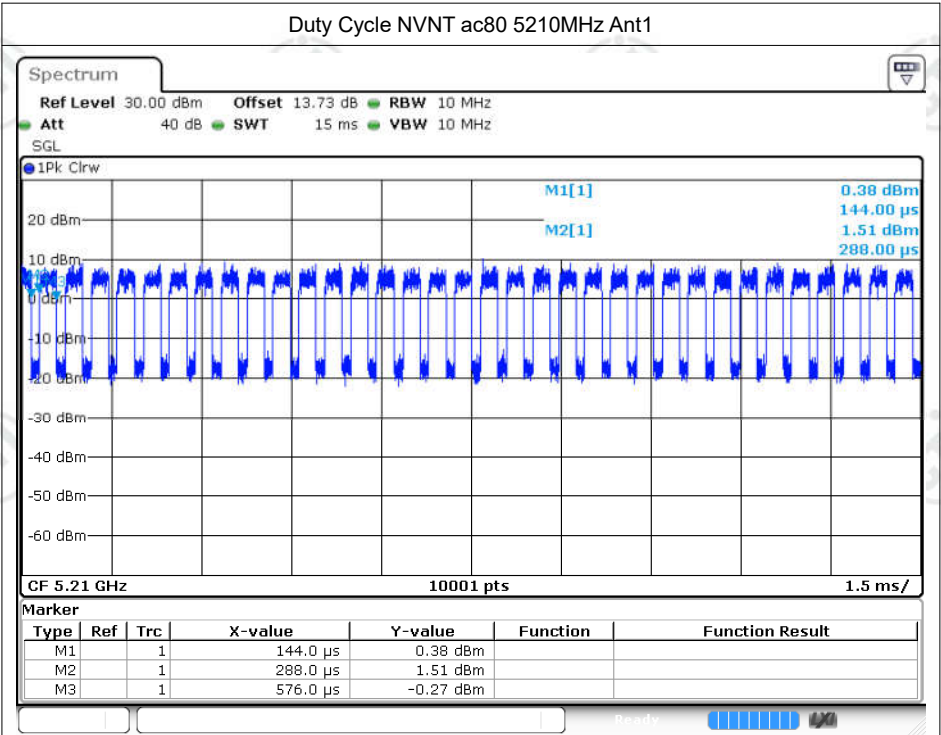

Date: 19.OCT.2023 14:40:21

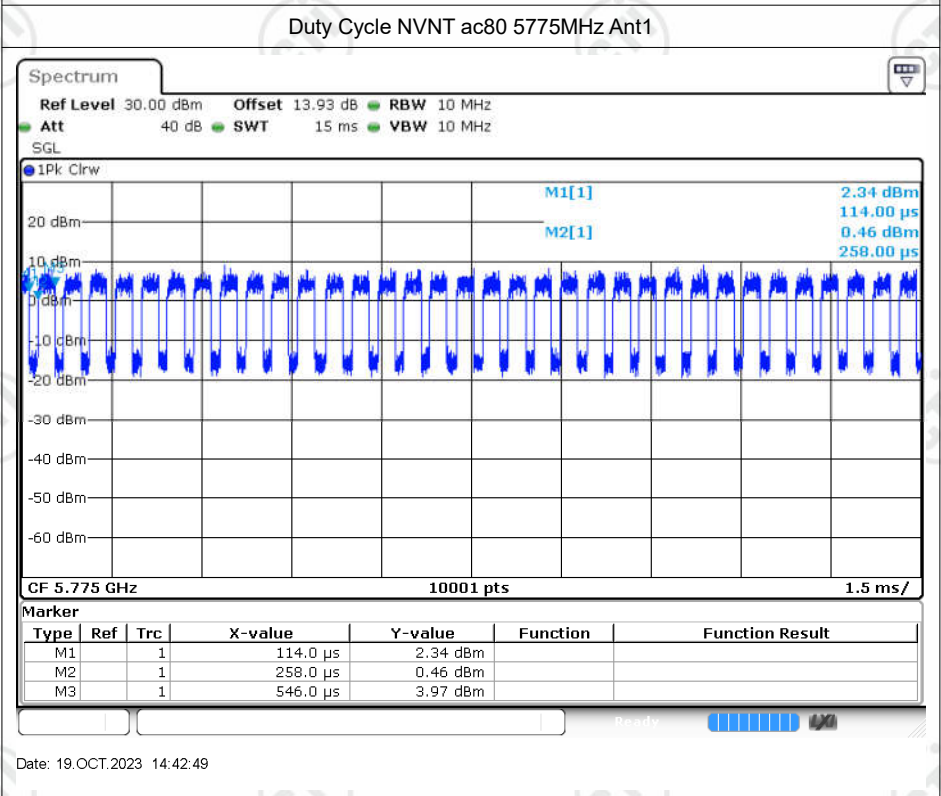


Date: 19.OCT.2023 14:42:49

## Maximum Conducted Output Power


| Condition | Mode | Frequency<br>(MHz) | Antenna | Conducted Power<br>(dBm) | Limit<br>(dBm) | Verdict |
|-----------|------|--------------------|---------|--------------------------|----------------|---------|
| NVNT      | a    | 5180               | Ant1    | 10.48                    | 24             | Pass    |
| NVNT      | a    | 5200               | Ant1    | 10.17                    | 24             | Pass    |
| NVNT      | a    | 5240               | Ant1    | 10.12                    | 24             | Pass    |
| NVNT      | a    | 5745               | Ant1    | 10.07                    | 30             | Pass    |
| NVNT      | a    | 5785               | Ant1    | 10.07                    | 30             | Pass    |
| NVNT      | a    | 5825               | Ant1    | 10.92                    | 30             | Pass    |
| NVNT      | n20  | 5180               | Ant1    | 9.55                     | 24             | Pass    |
| NVNT      | n20  | 5200               | Ant1    | 9.24                     | 24             | Pass    |
| NVNT      | n20  | 5240               | Ant1    | 9.15                     | 24             | Pass    |
| NVNT      | n20  | 5745               | Ant1    | 9.2                      | 30             | Pass    |
| NVNT      | n20  | 5785               | Ant1    | 9.14                     | 30             | Pass    |
| NVNT      | n20  | 5825               | Ant1    | 9.93                     | 30             | Pass    |
| NVNT      | n40  | 5190               | Ant1    | 9.79                     | 24             | Pass    |
| NVNT      | n40  | 5230               | Ant1    | 9.65                     | 24             | Pass    |
| NVNT      | n40  | 5755               | Ant1    | 9.63                     | 30             | Pass    |
| NVNT      | n40  | 5795               | Ant1    | 9.34                     | 30             | Pass    |
| NVNT      | ac20 | 5180               | Ant1    | 9.66                     | 24             | Pass    |
| NVNT      | ac20 | 5200               | Ant1    | 9.32                     | 24             | Pass    |
| NVNT      | ac20 | 5240               | Ant1    | 9.14                     | 24             | Pass    |
| NVNT      | ac20 | 5745               | Ant1    | 9.22                     | 30             | Pass    |
| NVNT      | ac20 | 5785               | Ant1    | 9.15                     | 30             | Pass    |
| NVNT      | ac20 | 5825               | Ant1    | 9.96                     | 30             | Pass    |
| NVNT      | ac40 | 5190               | Ant1    | 9.85                     | 24             | Pass    |
| NVNT      | ac40 | 5230               | Ant1    | 9.68                     | 24             | Pass    |
| NVNT      | ac40 | 5755               | Ant1    | 9.69                     | 30             | Pass    |
| NVNT      | ac40 | 5795               | Ant1    | 9.38                     | 30             | Pass    |
| NVNT      | ac80 | 5210               | Ant1    | 9.78                     | 24             | Pass    |
| NVNT      | ac80 | 5775               | Ant1    | 9.14                     | 30             | Pass    |

## -26dB Bandwidth


| Condition | Mode | Frequency (MHz) | Antenna | -26 dB Bandwidth (MHz) | Limit -26 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|------------------------|------------------------------|---------|
| NVNT      | a    | 5180            | Ant1    | 28.992                 | 0.5                          | Pass    |
| NVNT      | a    | 5200            | Ant1    | 28.815                 | 0.5                          | Pass    |
| NVNT      | a    | 5240            | Ant1    | 28.278                 | 0.5                          | Pass    |
| NVNT      | n20  | 5180            | Ant1    | 29.361                 | 0.5                          | Pass    |
| NVNT      | n20  | 5200            | Ant1    | 28.137                 | 0.5                          | Pass    |
| NVNT      | n20  | 5240            | Ant1    | 29.385                 | 0.5                          | Pass    |
| NVNT      | n40  | 5190            | Ant1    | 50.64                  | 0.5                          | Pass    |
| NVNT      | n40  | 5230            | Ant1    | 49.632                 | 0.5                          | Pass    |
| NVNT      | ac20 | 5180            | Ant1    | 29.49                  | 0.5                          | Pass    |
| NVNT      | ac20 | 5200            | Ant1    | 28.833                 | 0.5                          | Pass    |
| NVNT      | ac20 | 5240            | Ant1    | 28.995                 | 0.5                          | Pass    |
| NVNT      | ac40 | 5190            | Ant1    | 53.1                   | 0.5                          | Pass    |
| NVNT      | ac40 | 5230            | Ant1    | 52.974                 | 0.5                          | Pass    |
| NVNT      | ac80 | 5210            | Ant1    | 80.928                 | 0.5                          | Pass    |

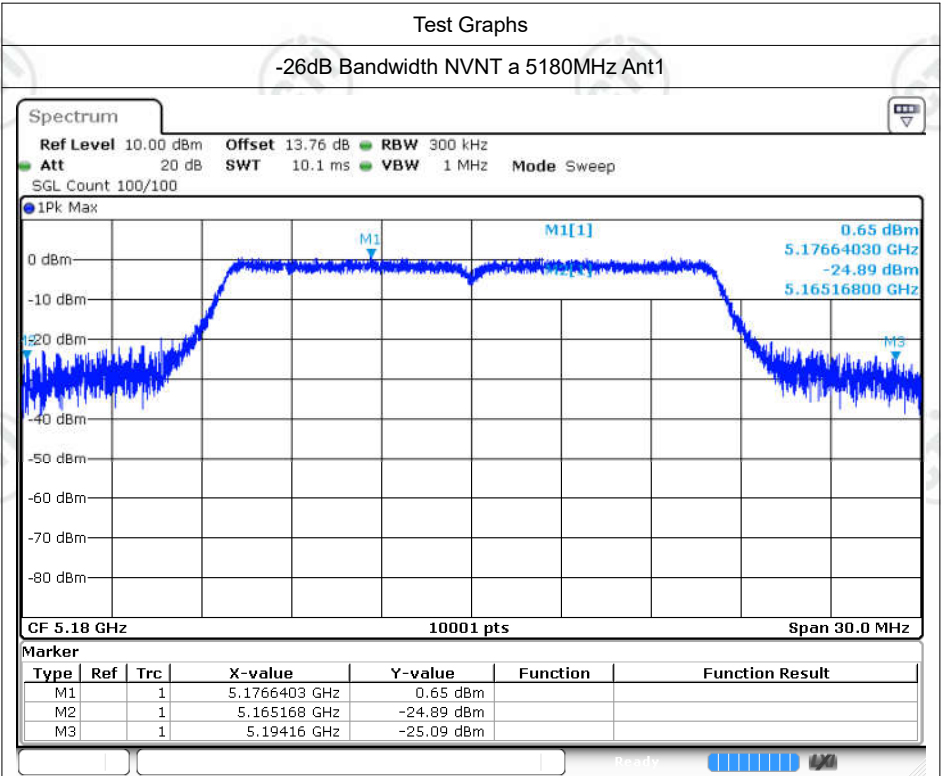


Date: 19.OCT.2023 13:25:59

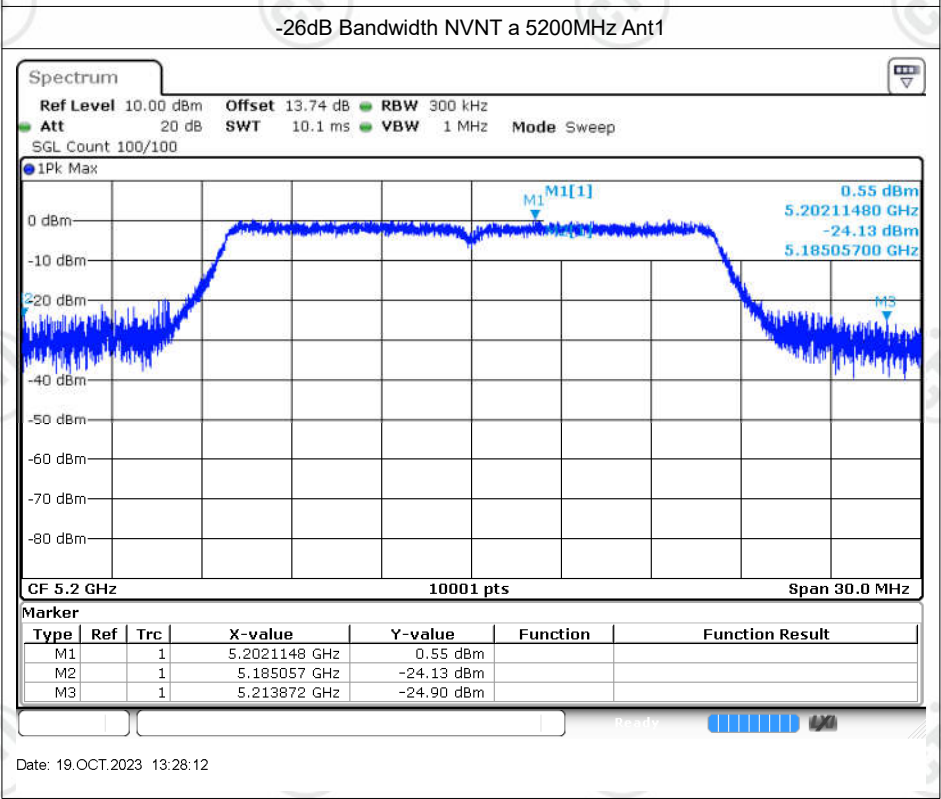


Date: 19.OCT.2023 13:28:12

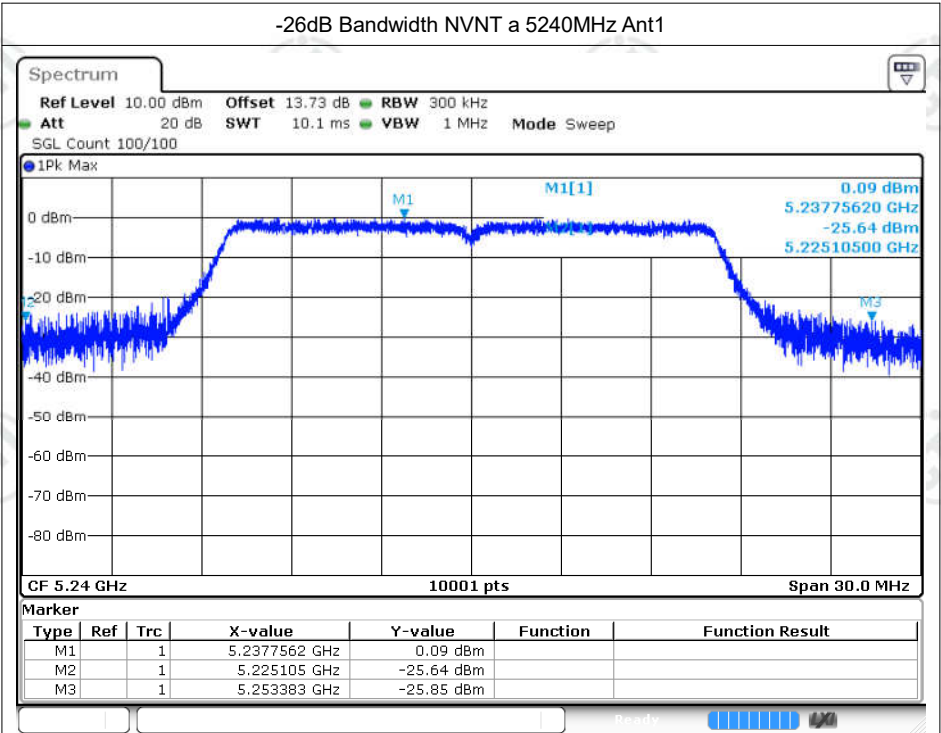


Date: 19.OCT.2023 13:29:41

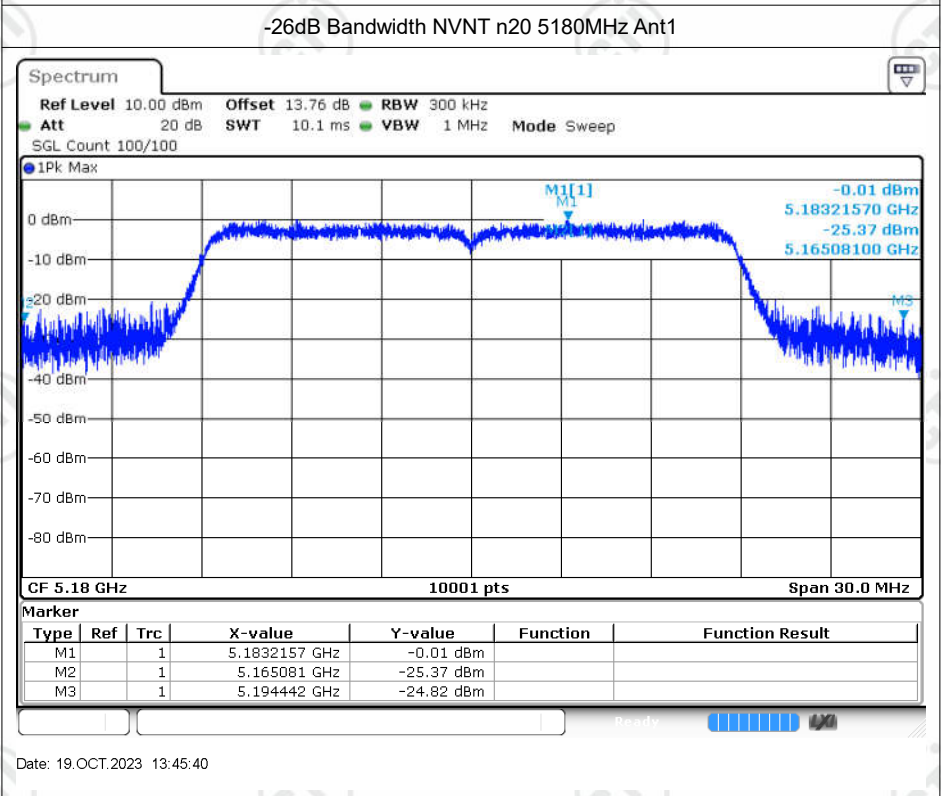


Date: 19.OCT.2023 13:45:40

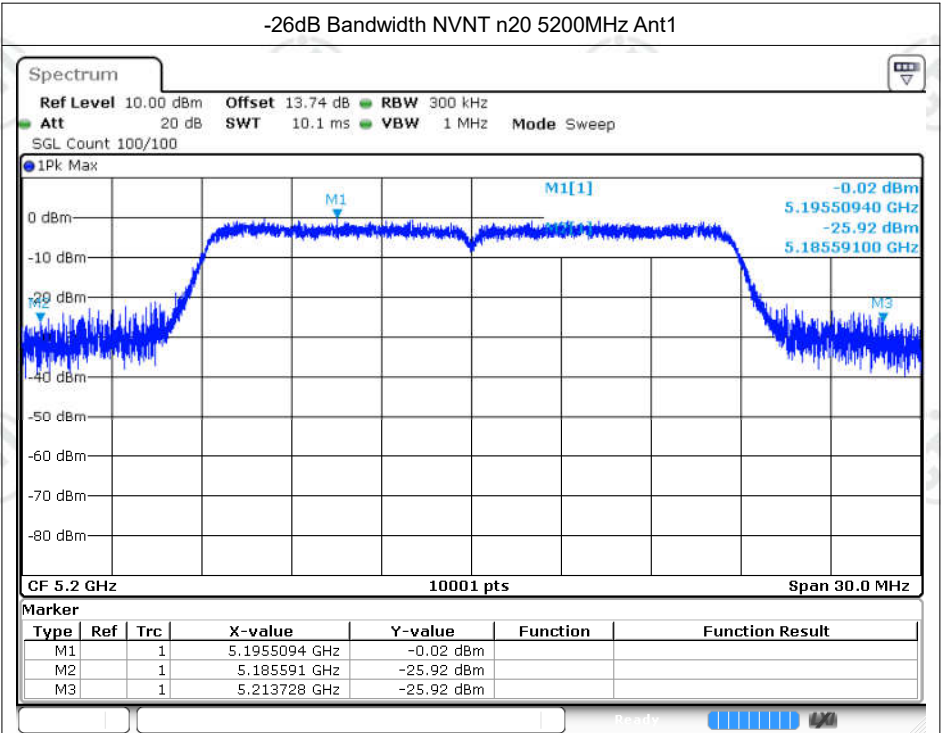


Date: 19.OCT.2023 13:47:33

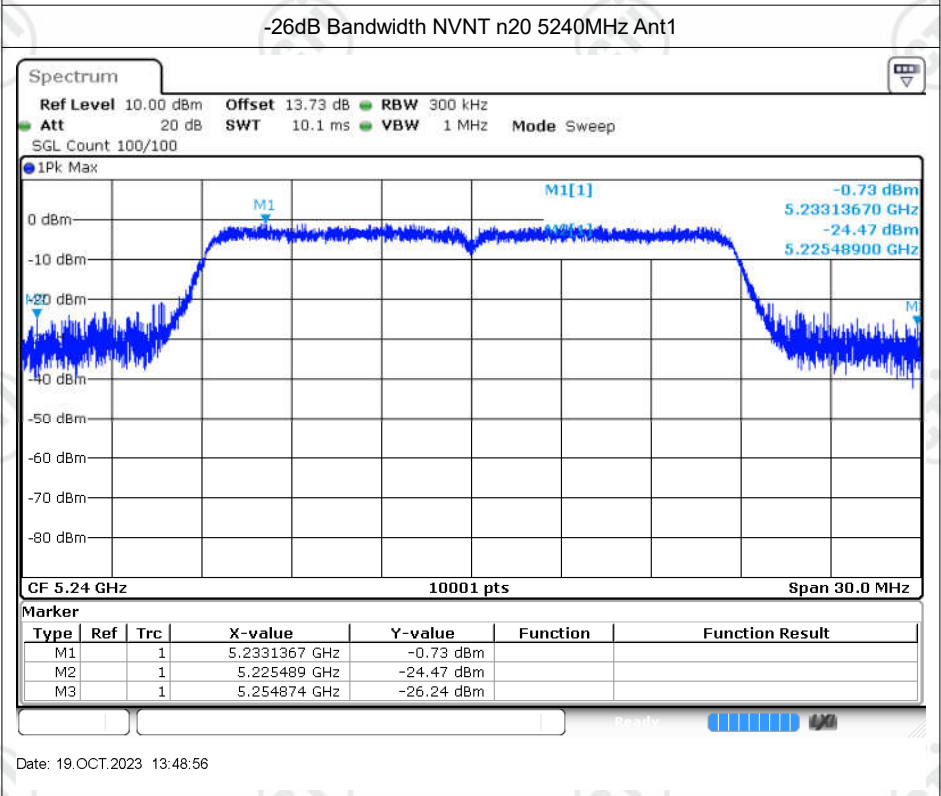


Date: 19.OCT.2023 13:48:56

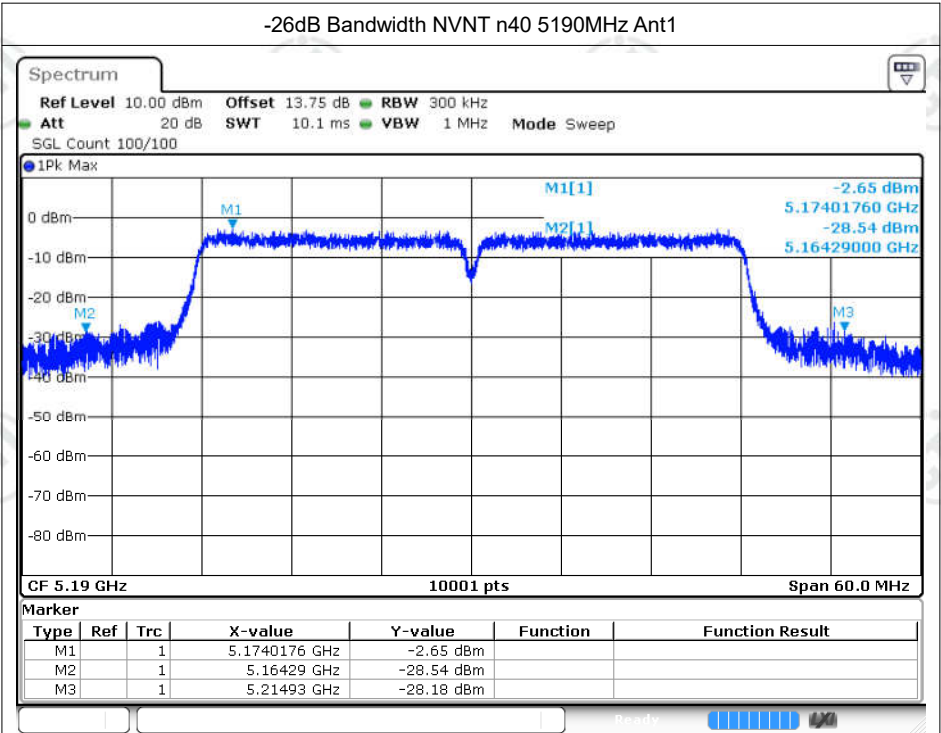


Date: 19.OCT.2023 14:04:11

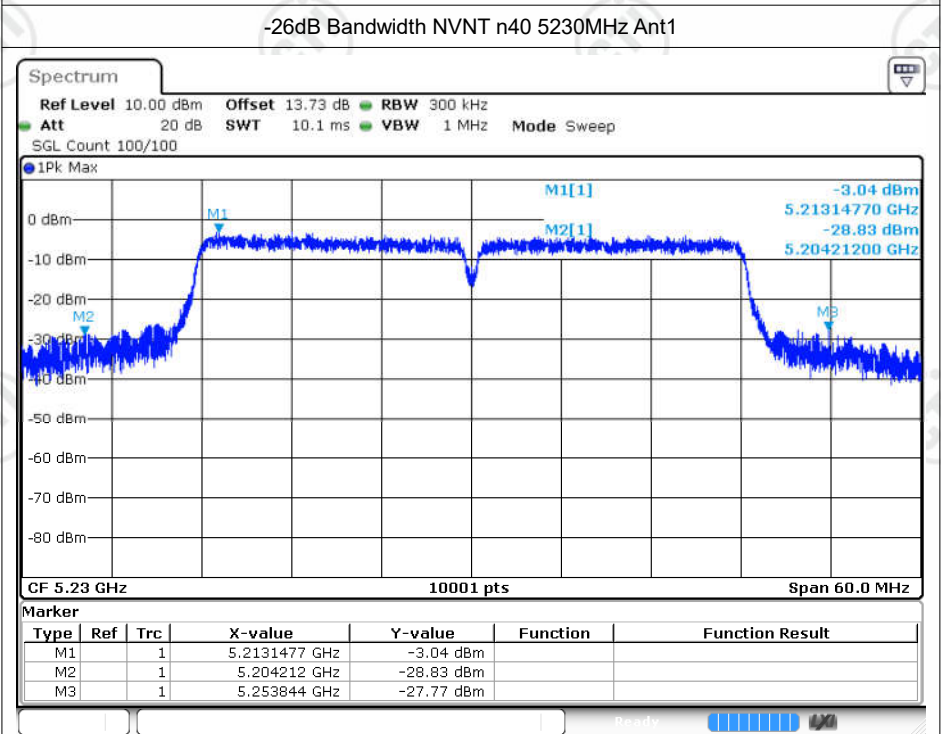


Date: 19.OCT.2023 14:06:16

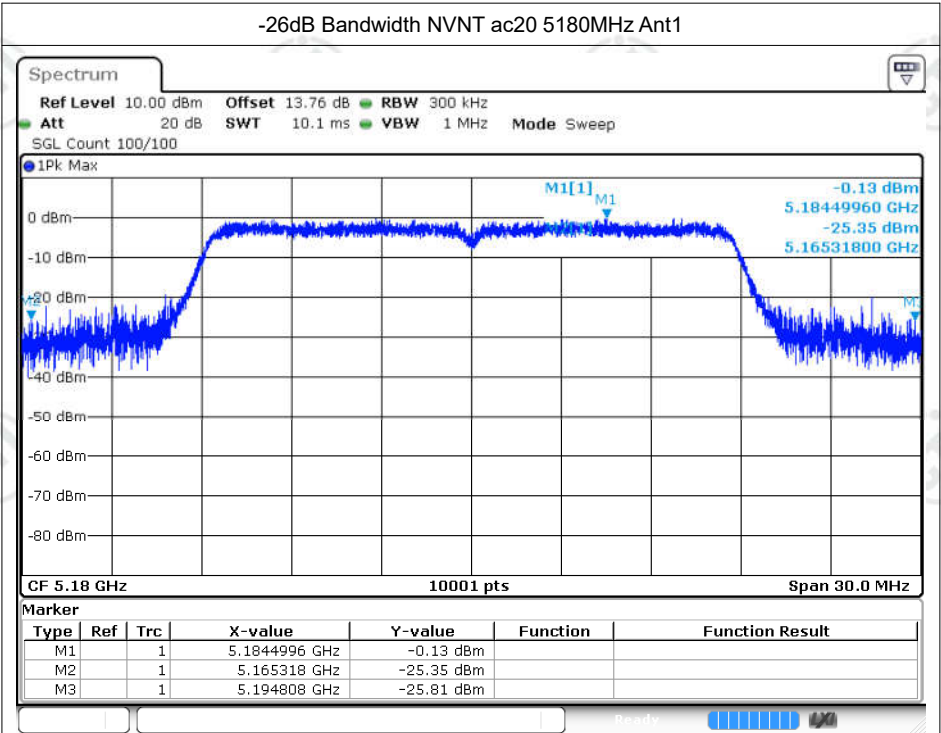


Date: 19.OCT.2023 14:13:11

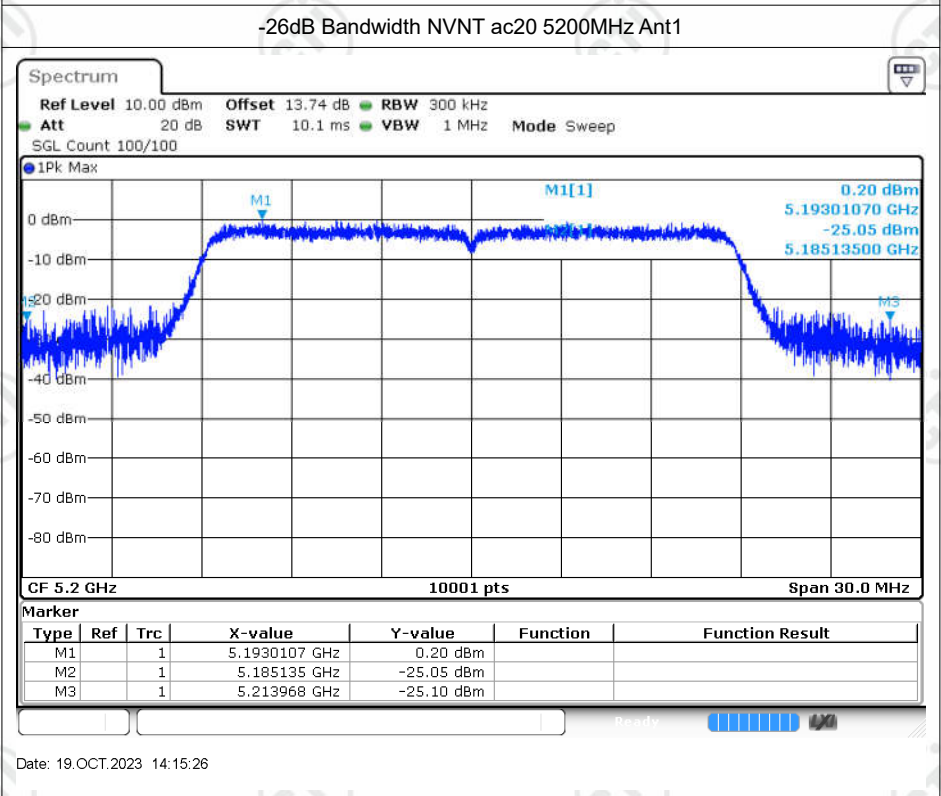


Date: 19.OCT.2023 14:15:26

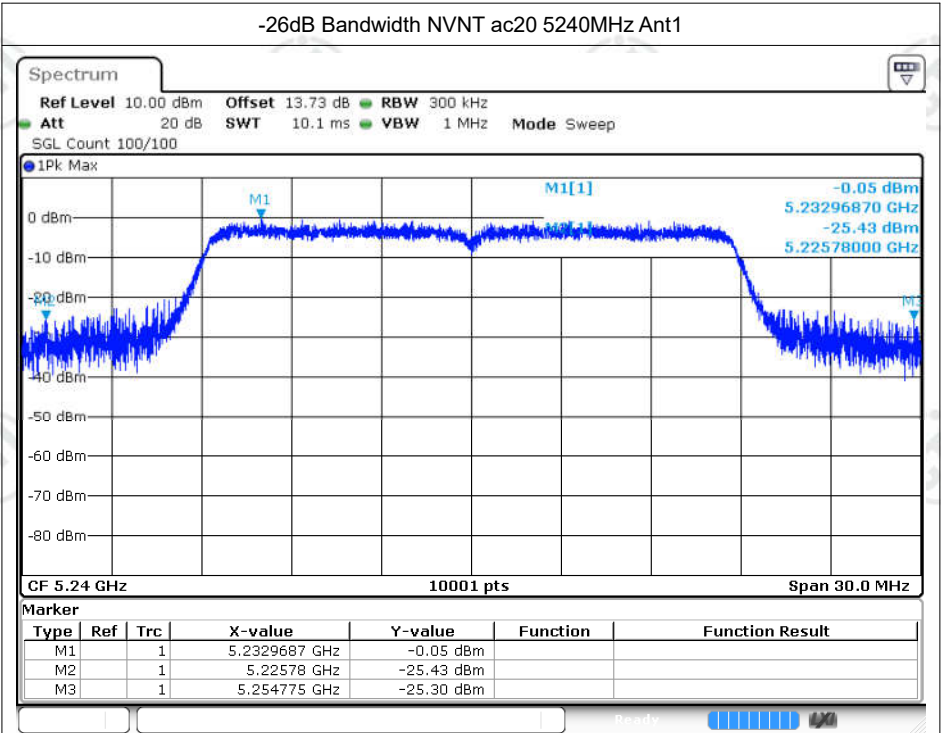


Date: 19.OCT.2023 14:17:12

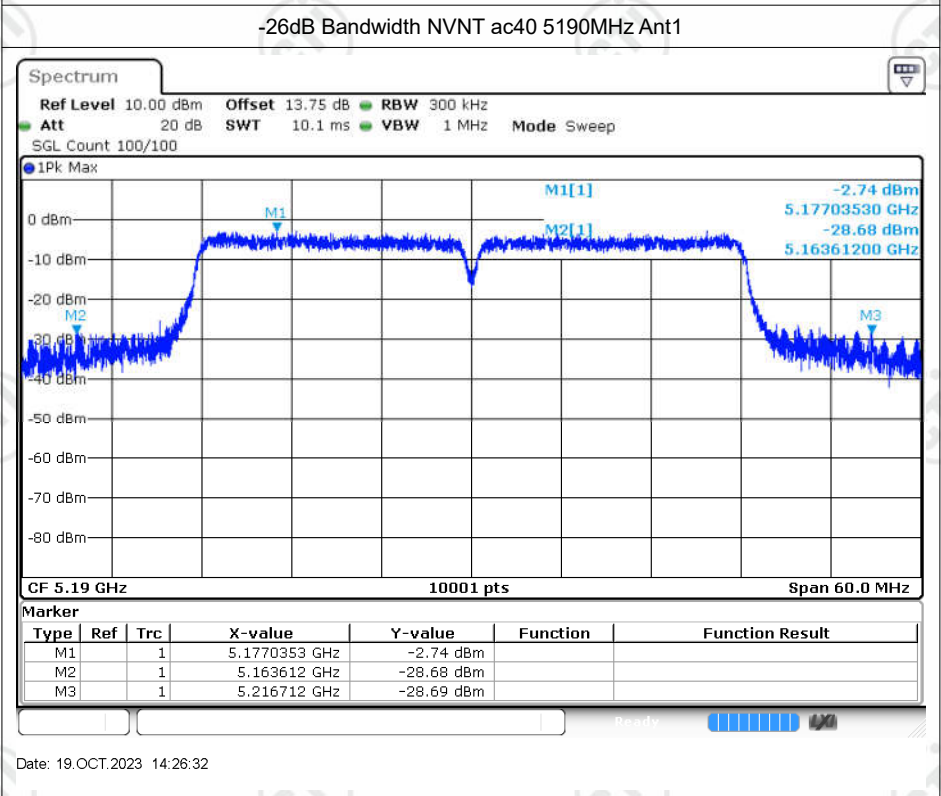

Date: 19.OCT.2023 14:26:32

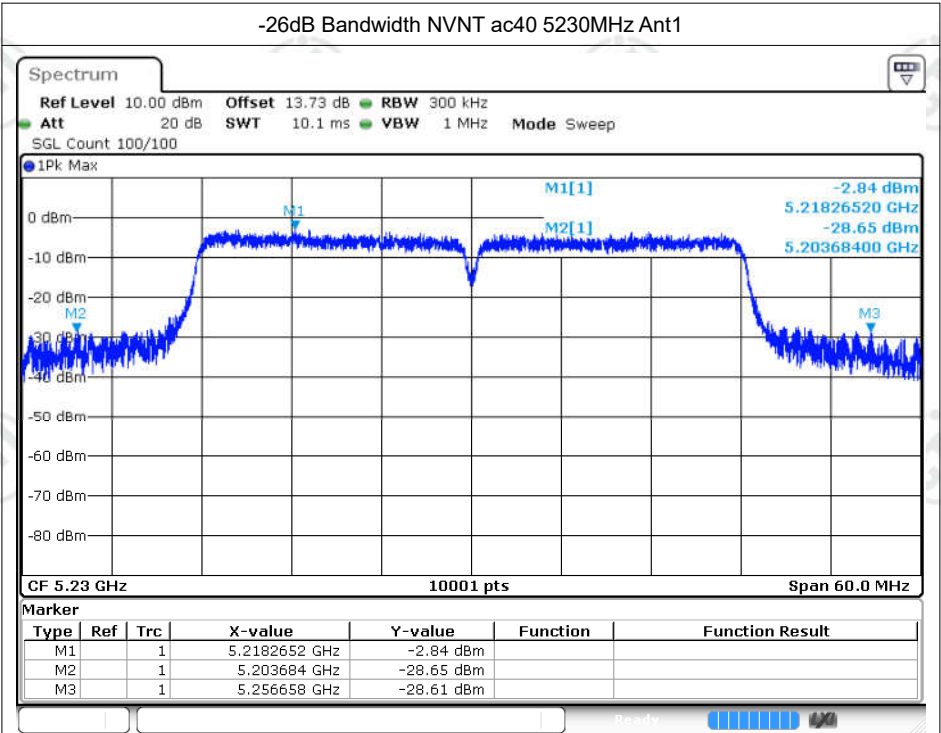


Date: 19.OCT.2023 14:30:16

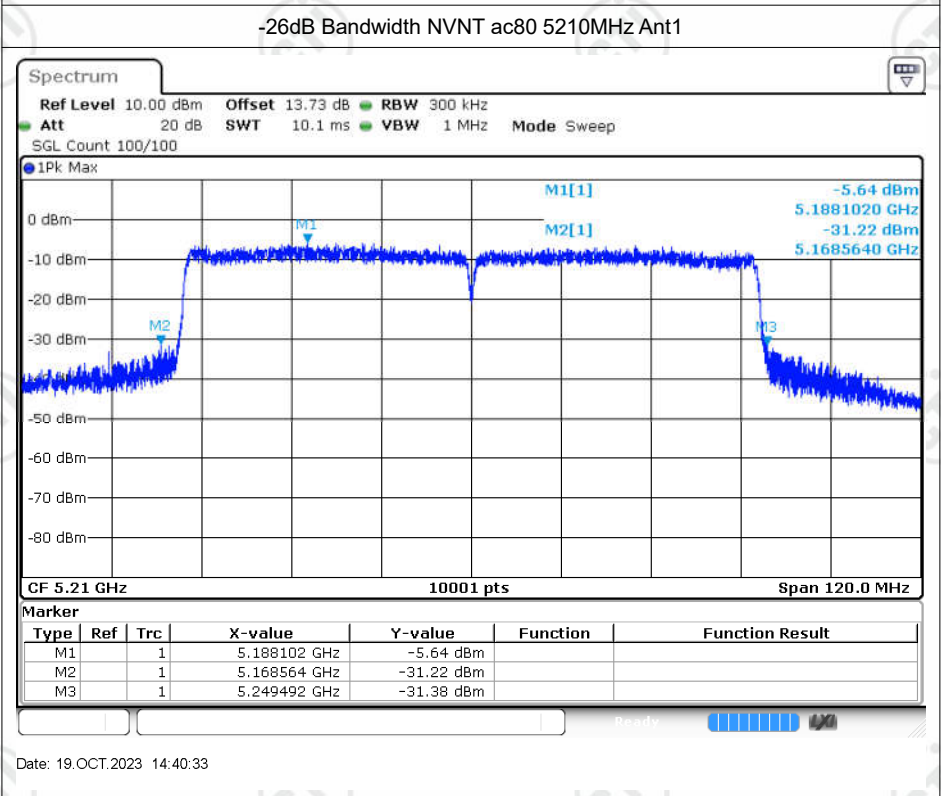


Date: 19.OCT.2023 14:40:33

## Occupied Channel Bandwidth


| Condition | Mode | Frequency (MHz) | Antenna | 99% OBW (MHz) |
|-----------|------|-----------------|---------|---------------|
| NVNT      | a    | 5180            | Ant1    | 16.606        |
| NVNT      | a    | 5200            | Ant1    | 16.603        |
| NVNT      | a    | 5240            | Ant1    | 16.594        |
| NVNT      | a    | 5745            | Ant1    | 16.597        |
| NVNT      | a    | 5785            | Ant1    | 16.6          |
| NVNT      | a    | 5825            | Ant1    | 16.609        |
| NVNT      | n20  | 5180            | Ant1    | 17.632        |
| NVNT      | n20  | 5200            | Ant1    | 17.641        |
| NVNT      | n20  | 5240            | Ant1    | 17.626        |
| NVNT      | n20  | 5745            | Ant1    | 17.614        |
| NVNT      | n20  | 5785            | Ant1    | 17.617        |
| NVNT      | n20  | 5825            | Ant1    | 17.635        |
| NVNT      | n40  | 5190            | Ant1    | 36.404        |
| NVNT      | n40  | 5230            | Ant1    | 36.41         |
| NVNT      | n40  | 5755            | Ant1    | 36.218        |
| NVNT      | n40  | 5795            | Ant1    | 36.2          |
| NVNT      | ac20 | 5180            | Ant1    | 17.641        |
| NVNT      | ac20 | 5200            | Ant1    | 17.641        |
| NVNT      | ac20 | 5240            | Ant1    | 17.635        |
| NVNT      | ac20 | 5745            | Ant1    | 17.614        |
| NVNT      | ac20 | 5785            | Ant1    | 17.617        |
| NVNT      | ac20 | 5825            | Ant1    | 17.632        |
| NVNT      | ac40 | 5190            | Ant1    | 36.416        |
| NVNT      | ac40 | 5230            | Ant1    | 36.374        |
| NVNT      | ac40 | 5755            | Ant1    | 36.194        |
| NVNT      | ac40 | 5795            | Ant1    | 36.194        |
| NVNT      | ac80 | 5210            | Ant1    | 75.628        |
| NVNT      | ac80 | 5775            | Ant1    | 75.616        |

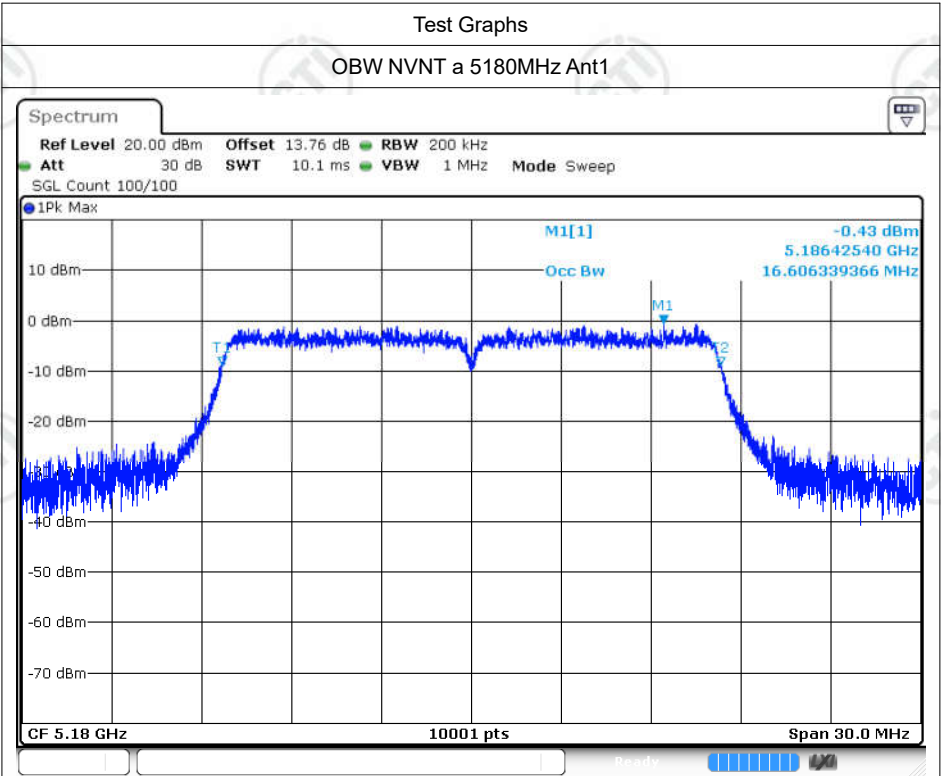


Date: 19.OCT.2023 13:25:53

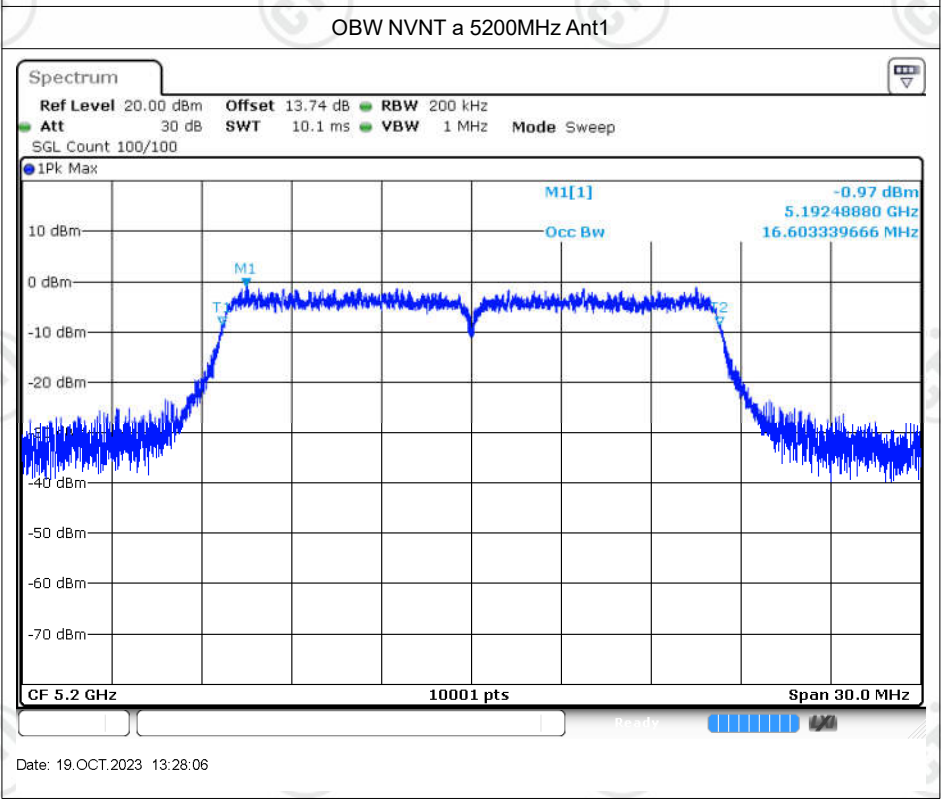


Date: 19.OCT.2023 13:28:06

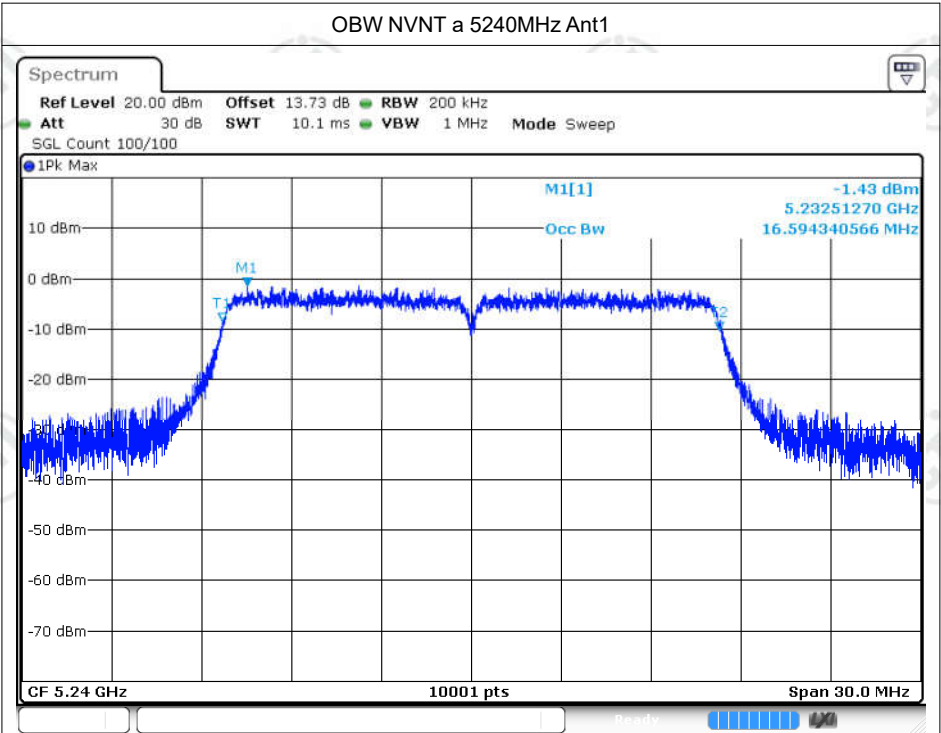


Date: 19.OCT.2023 13:29:35

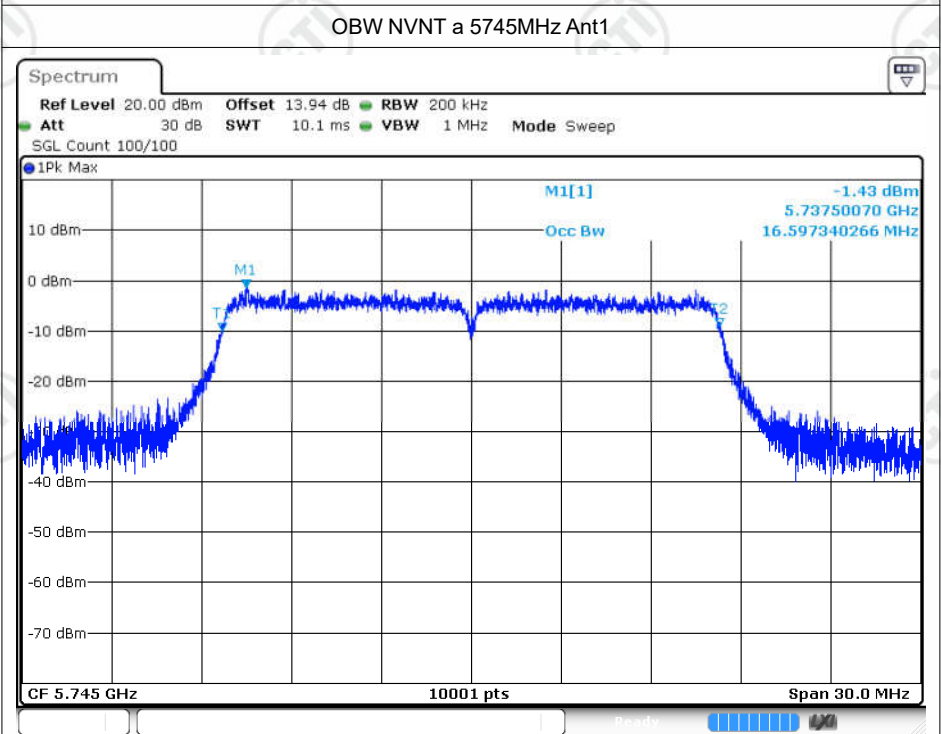


Date: 19.OCT.2023 13:32:24

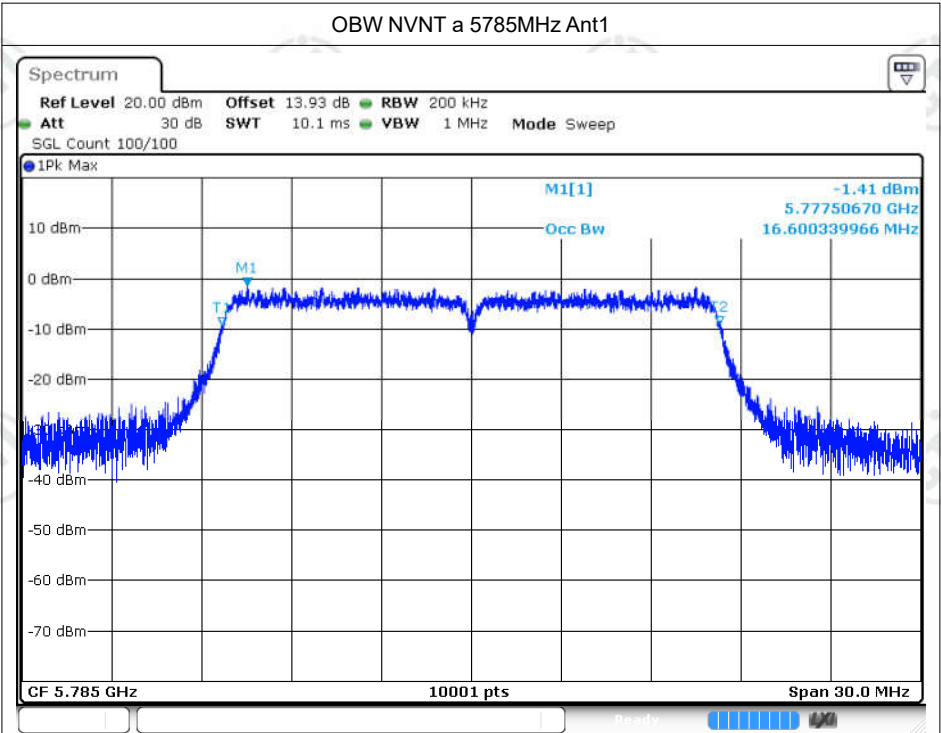


Date: 19.OCT.2023 13:36:19

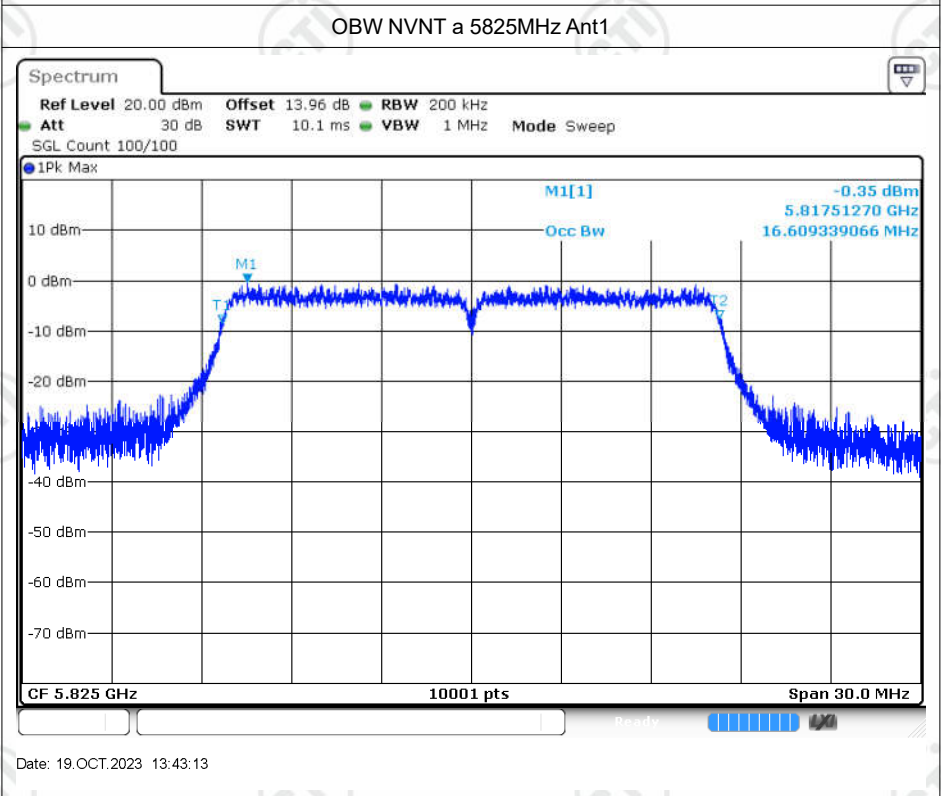



Date: 19.OCT.2023 13:43:13

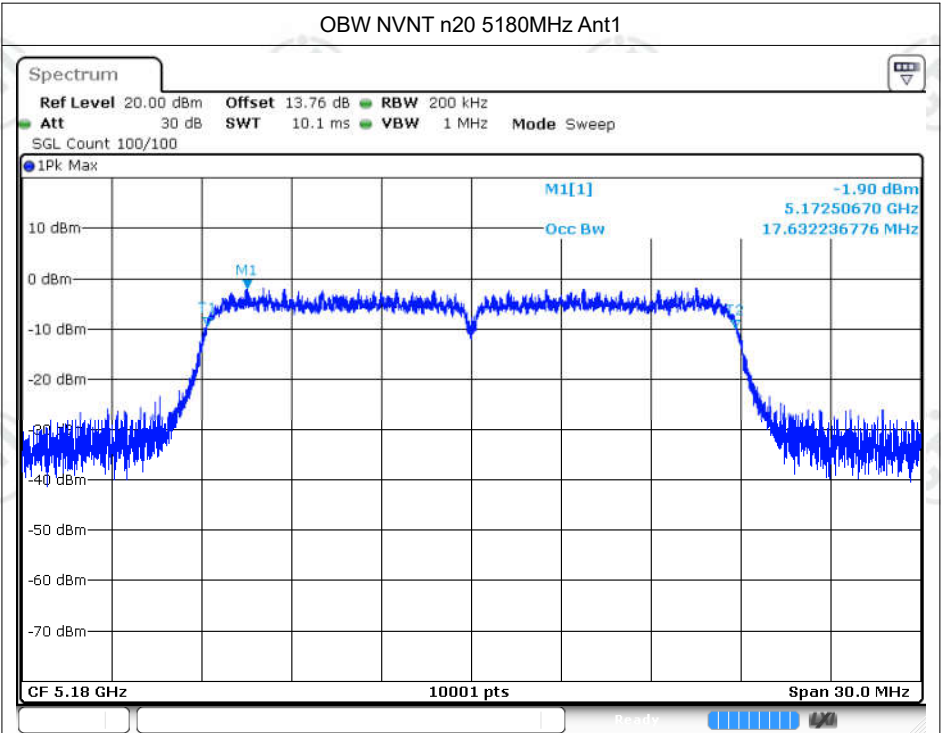


Date: 19.OCT.2023 13:45:34

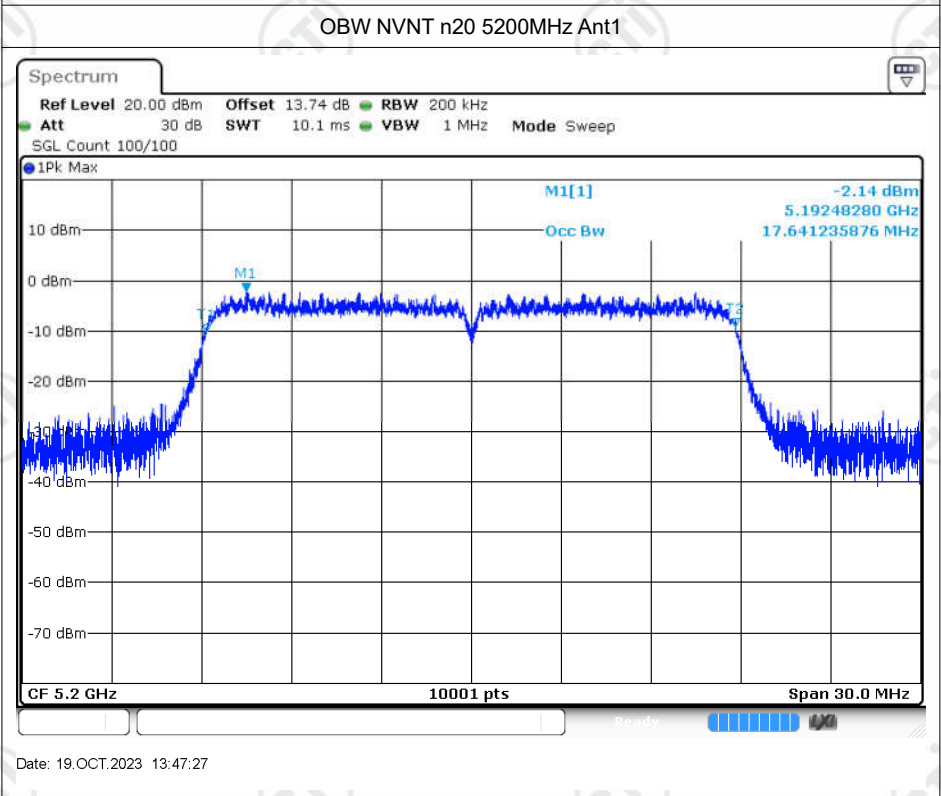


Date: 19.OCT.2023 13:47:27

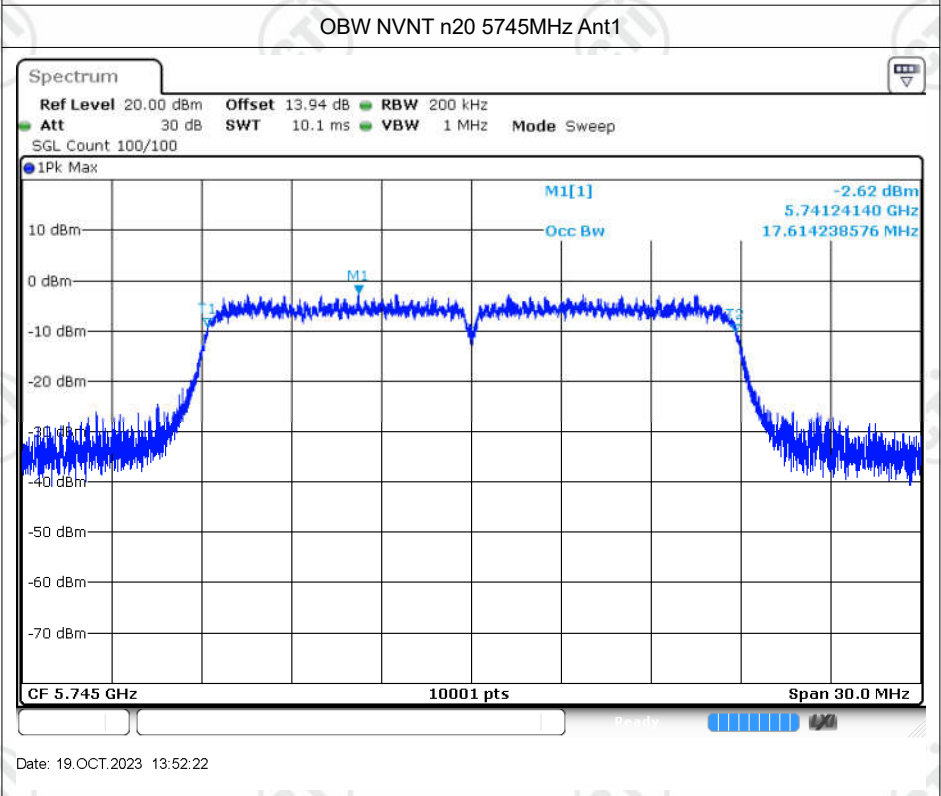
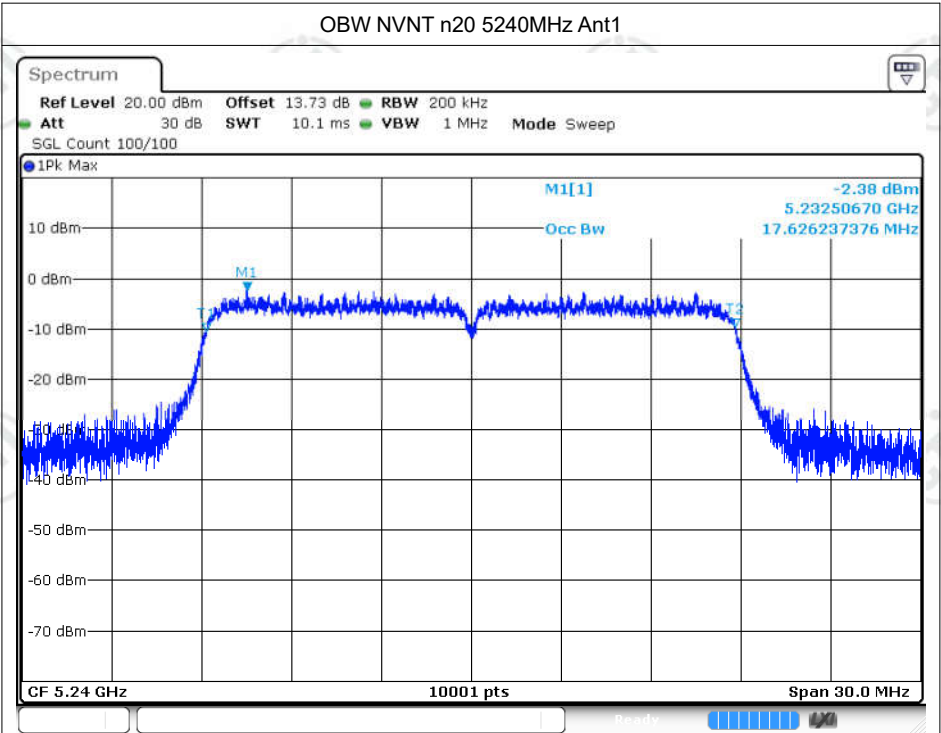


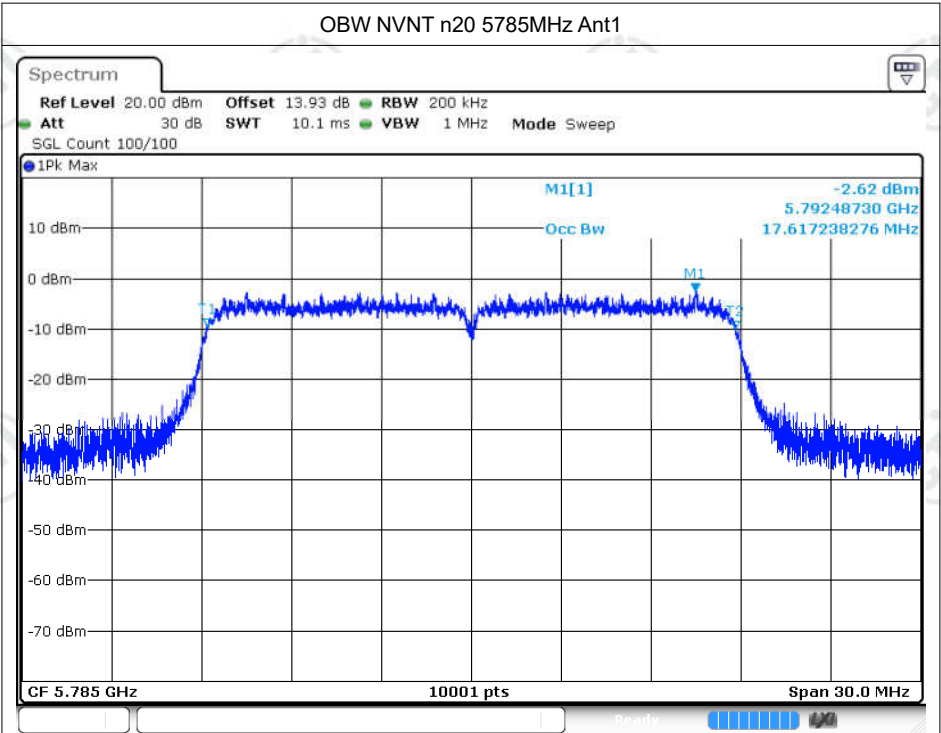


Date: 19.OCT.2023 13:54:51

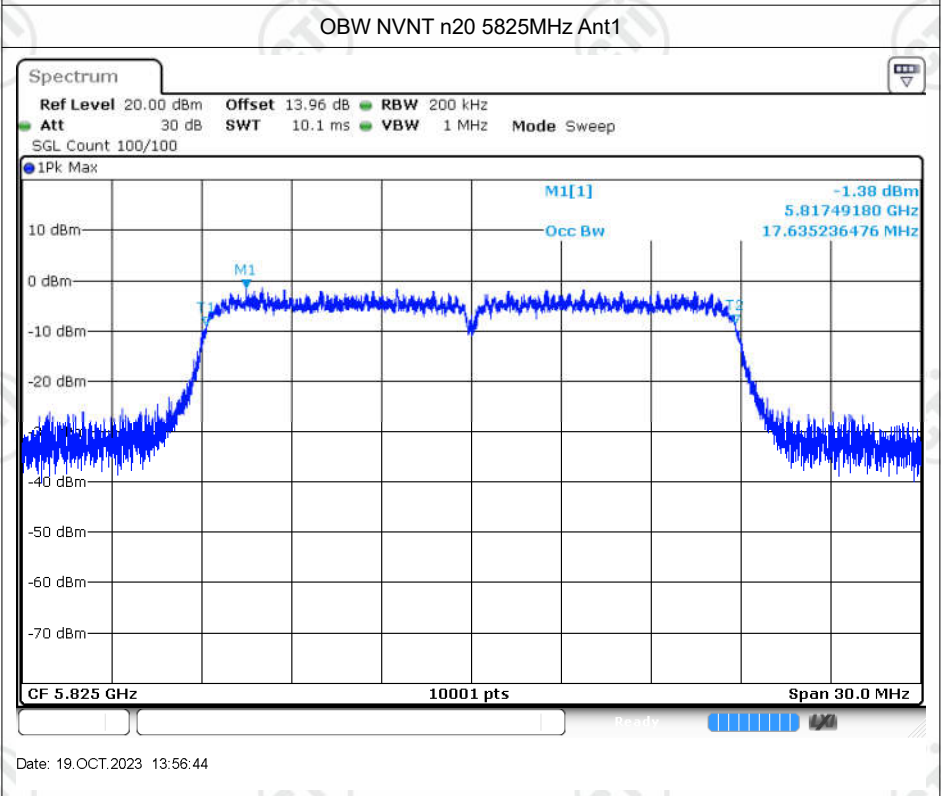


Date: 19.OCT.2023 13:56:44

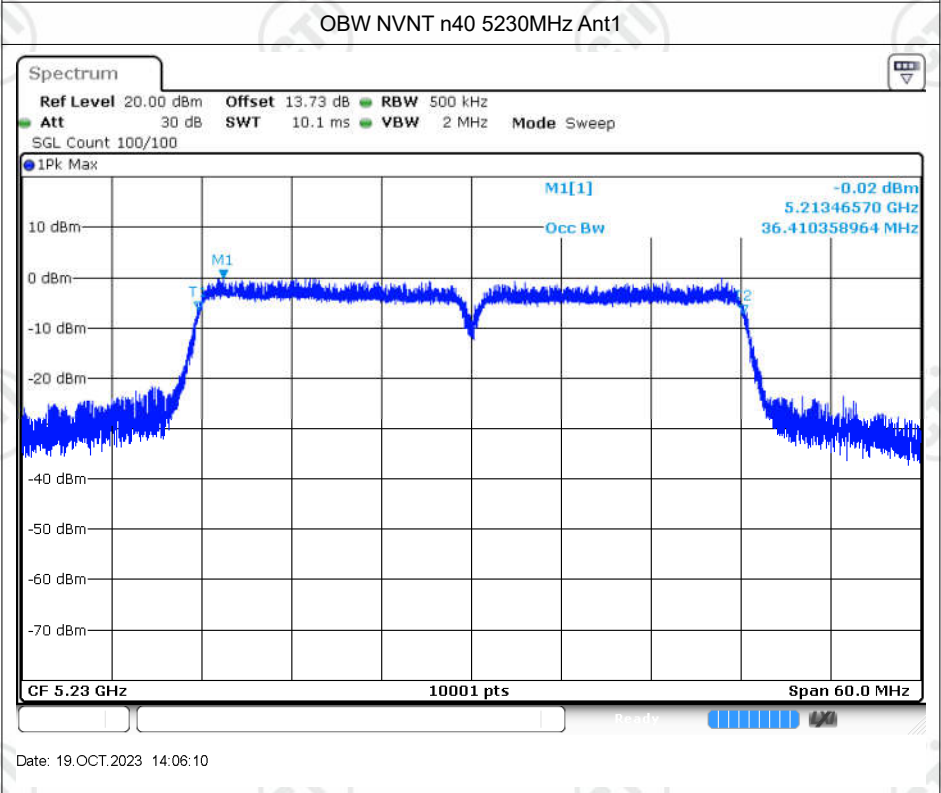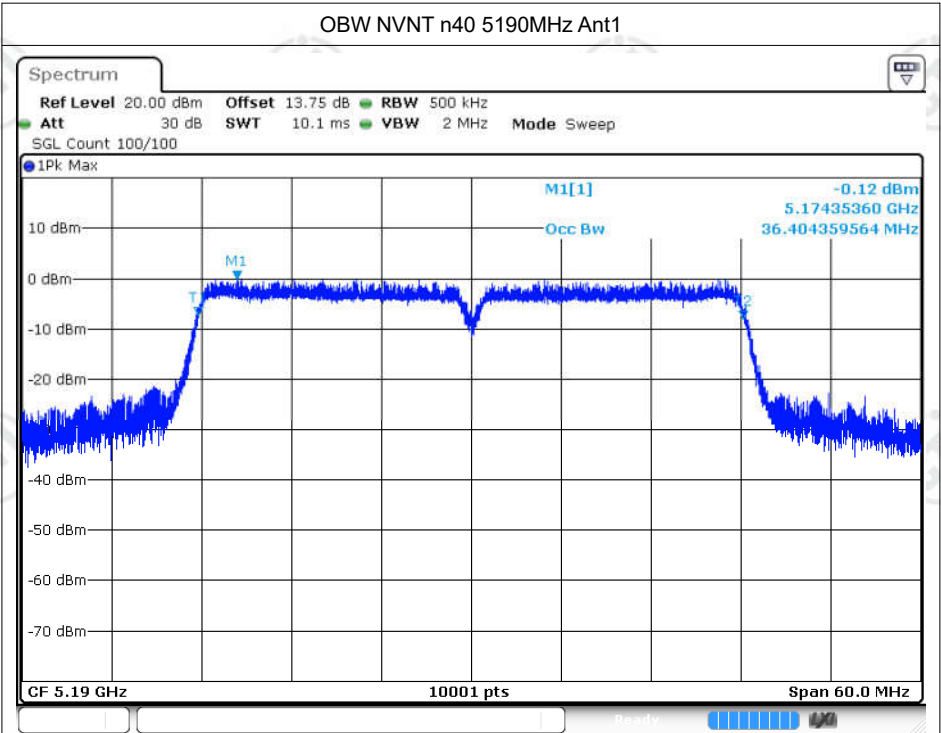


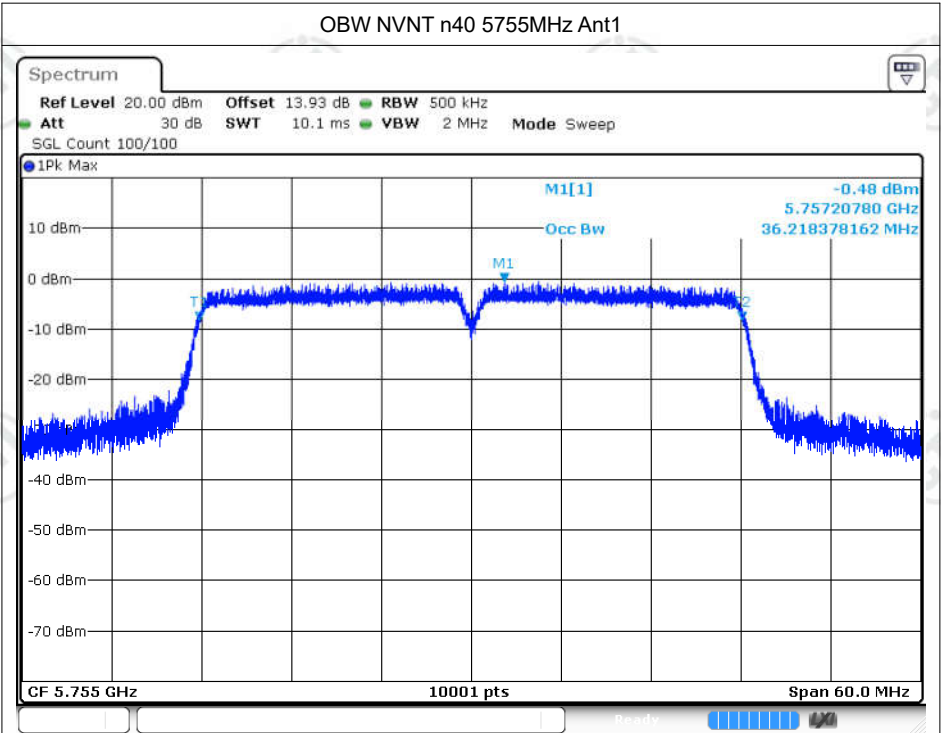


Date: 19.OCT.2023 14:08:36

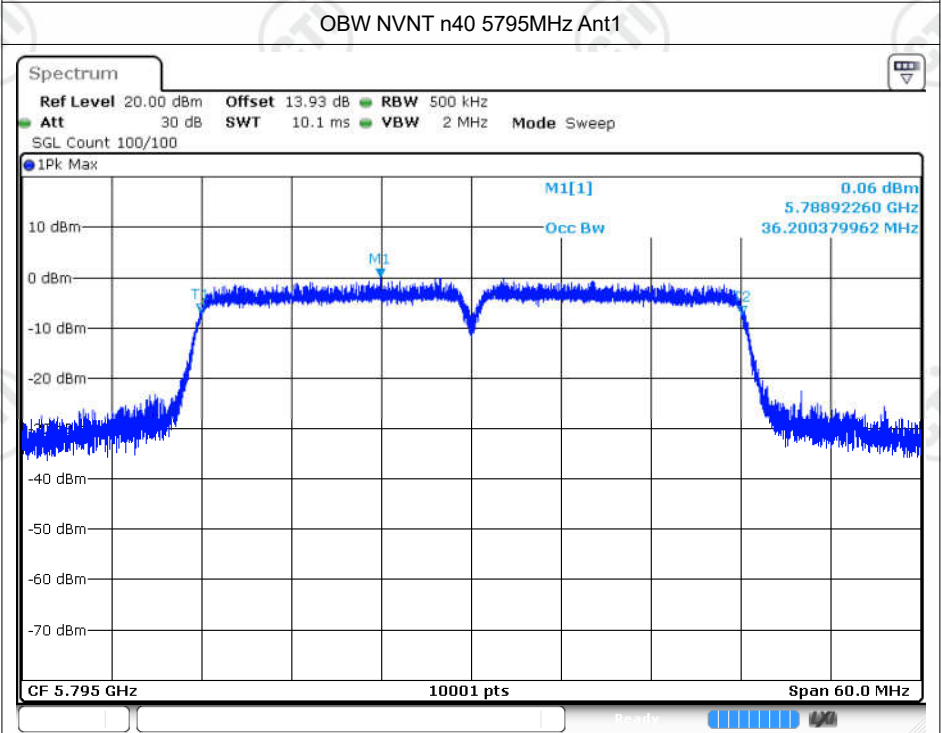


Date: 19.OCT.2023 14:10:31

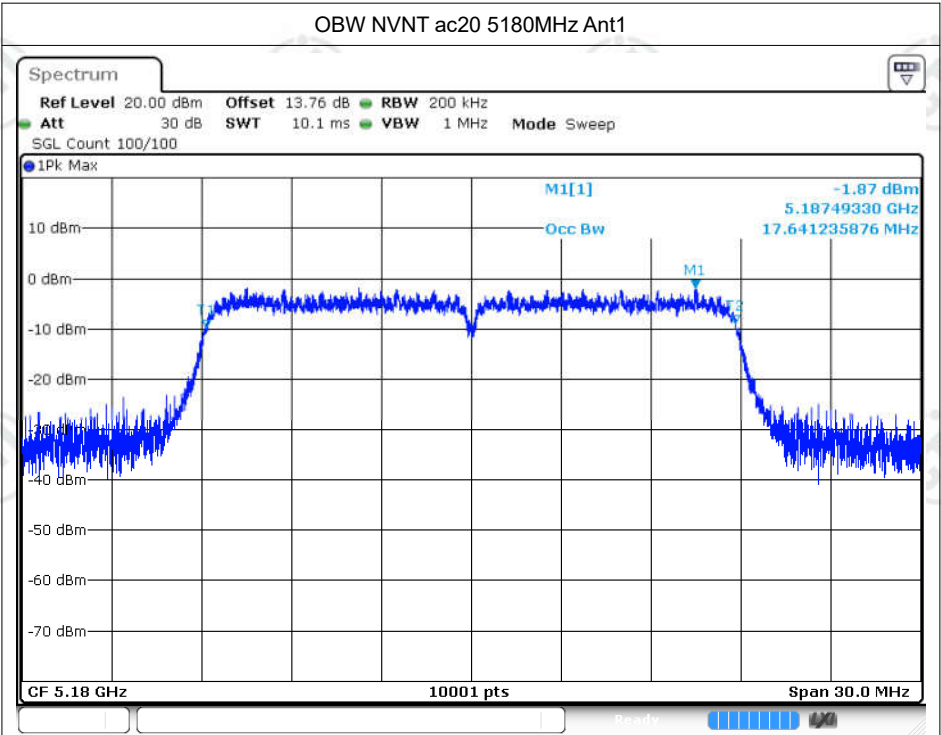


Date: 19.OCT.2023 14:13:05

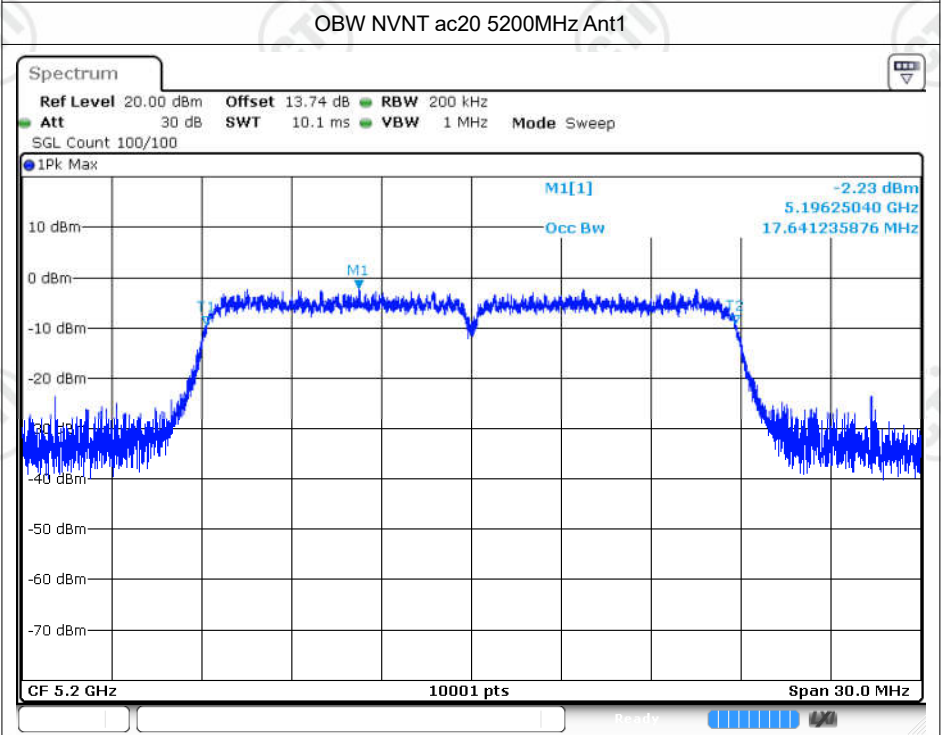


Date: 19.OCT.2023 14:15:20

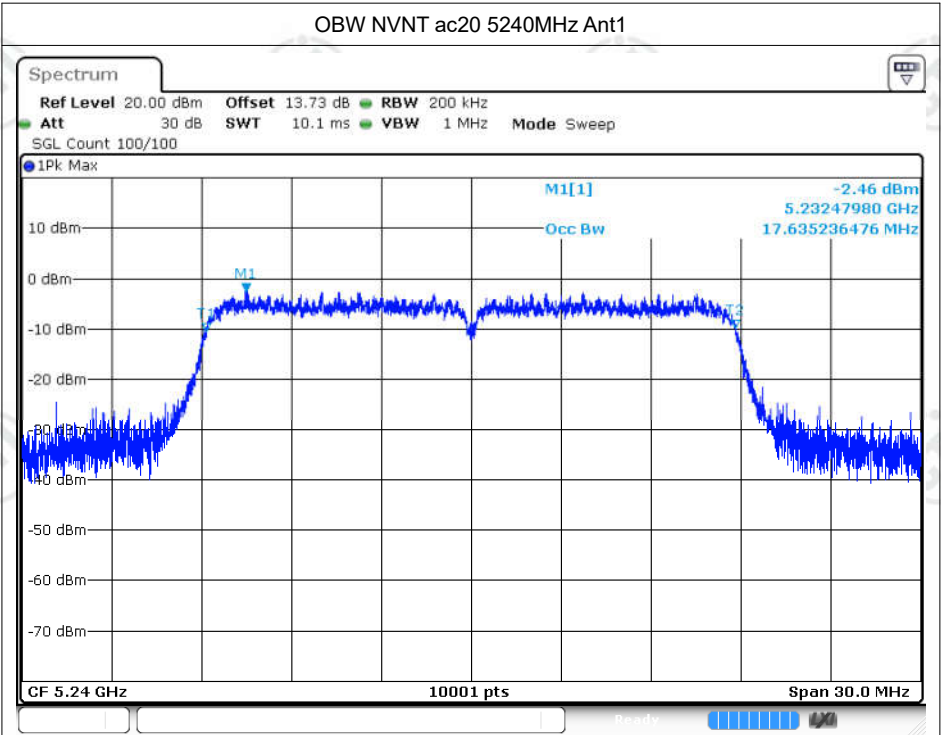


Date: 19.OCT.2023 14:17:06

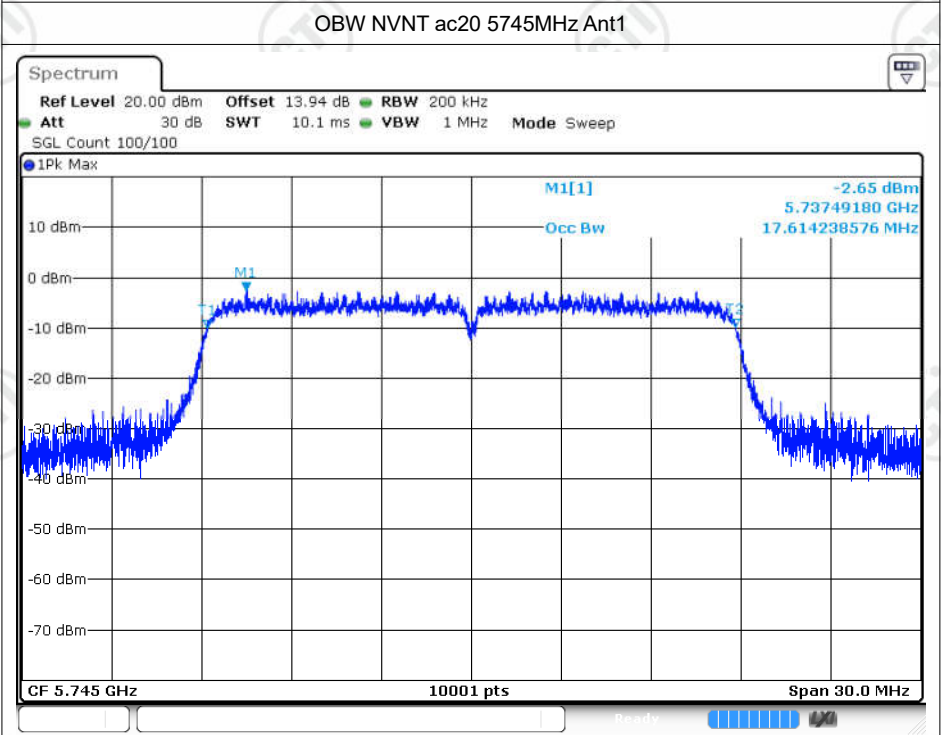



Date: 19.OCT.2023 14:19:15


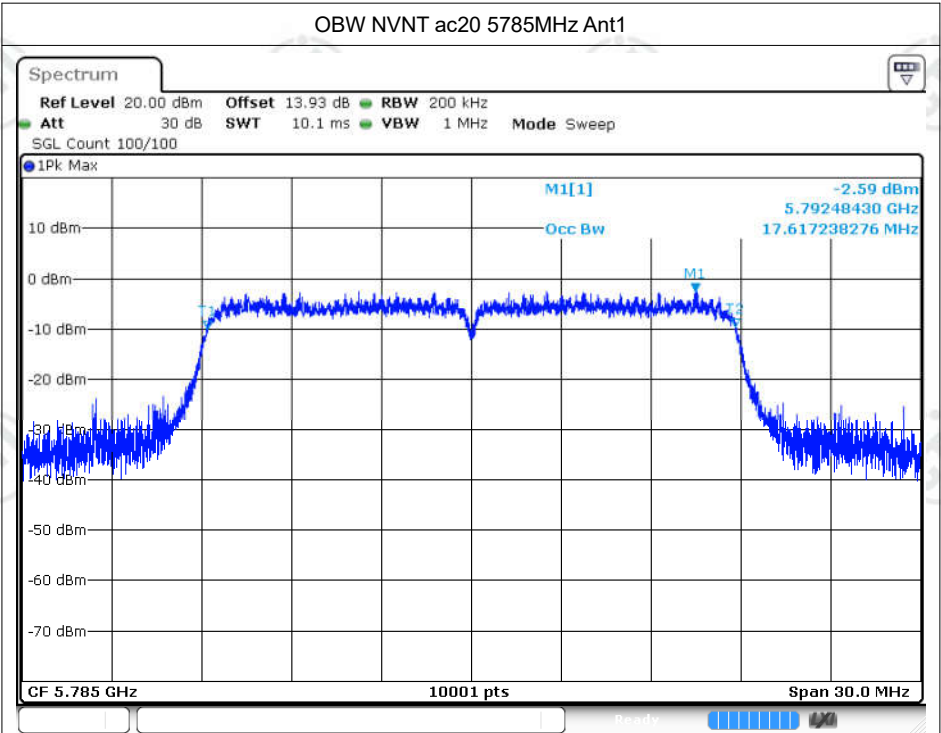



Date: 19.OCT.2023 14:21:33

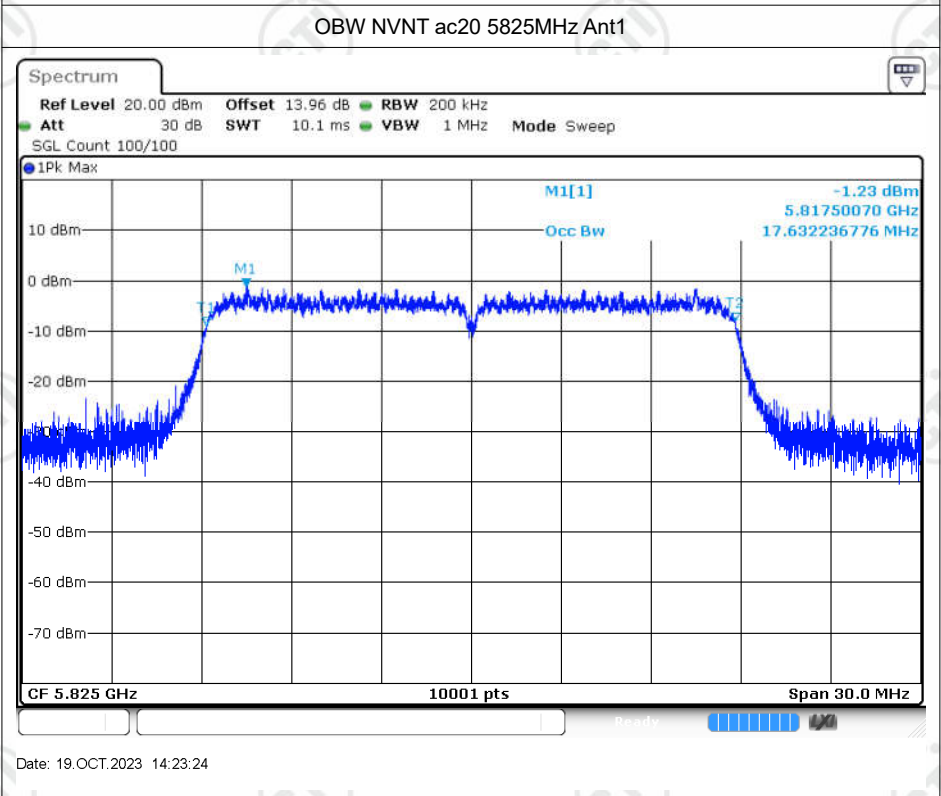


Date: 19.OCT.2023 14:23:24

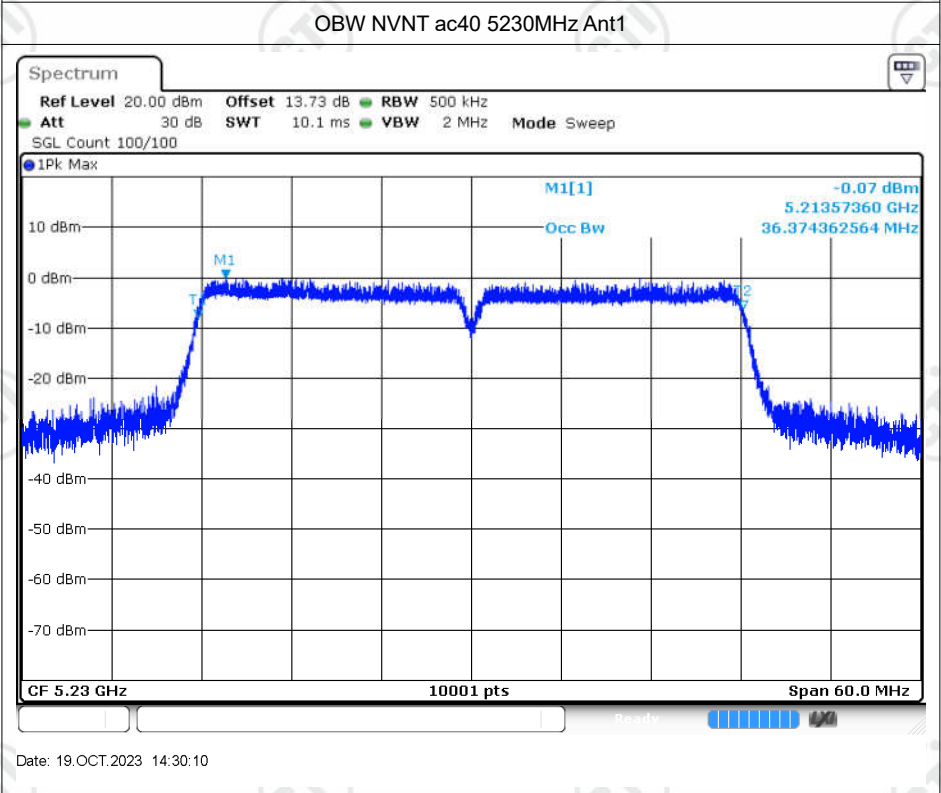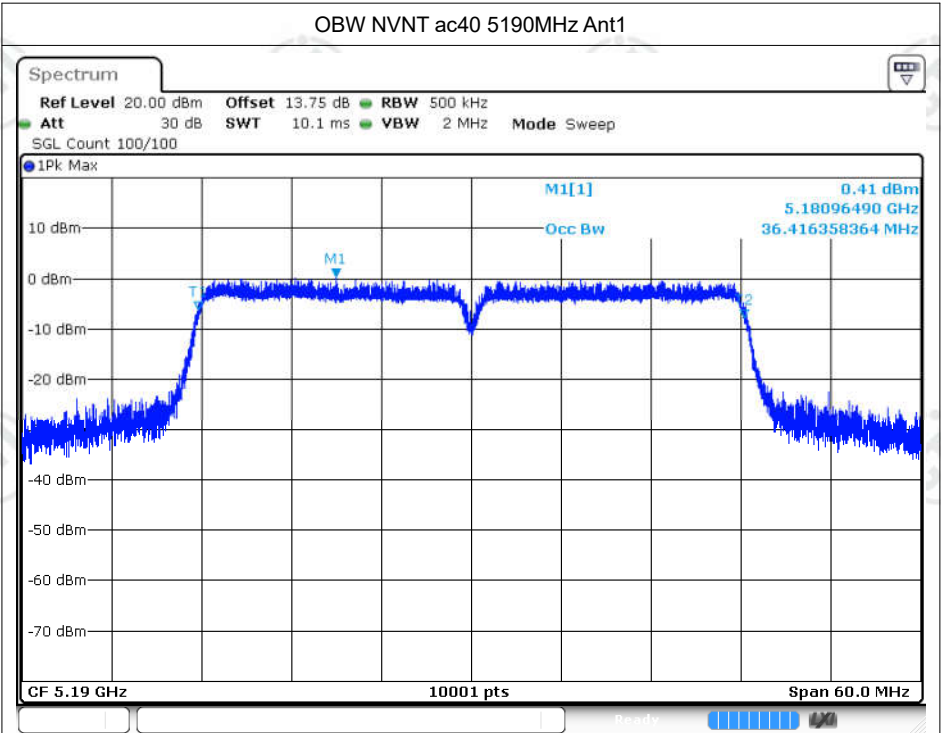

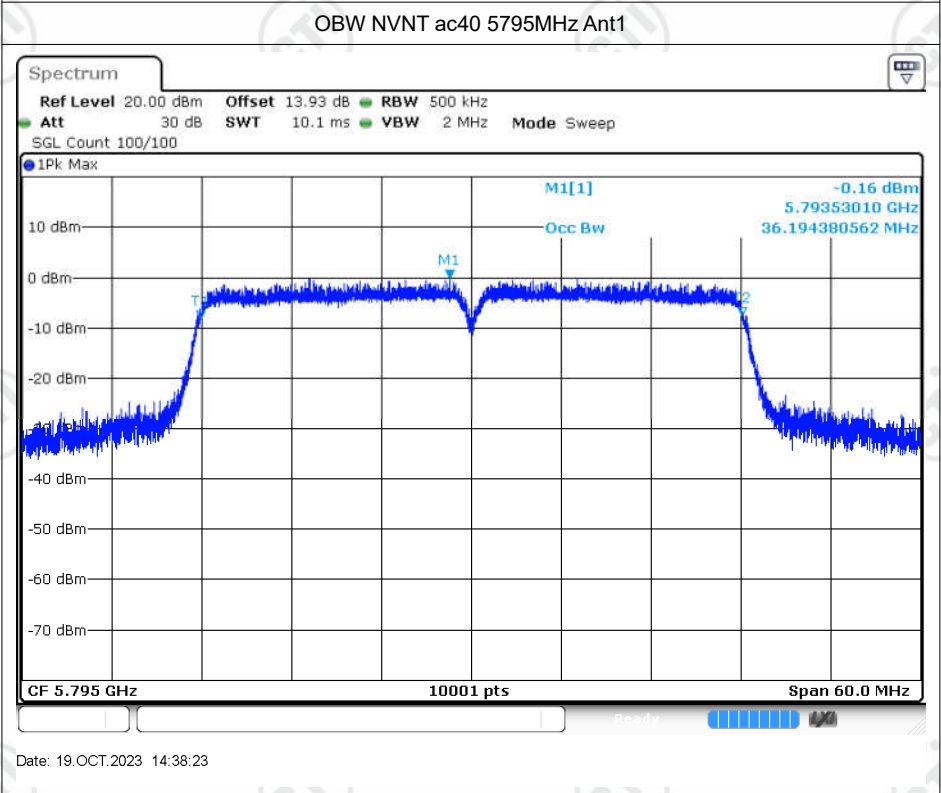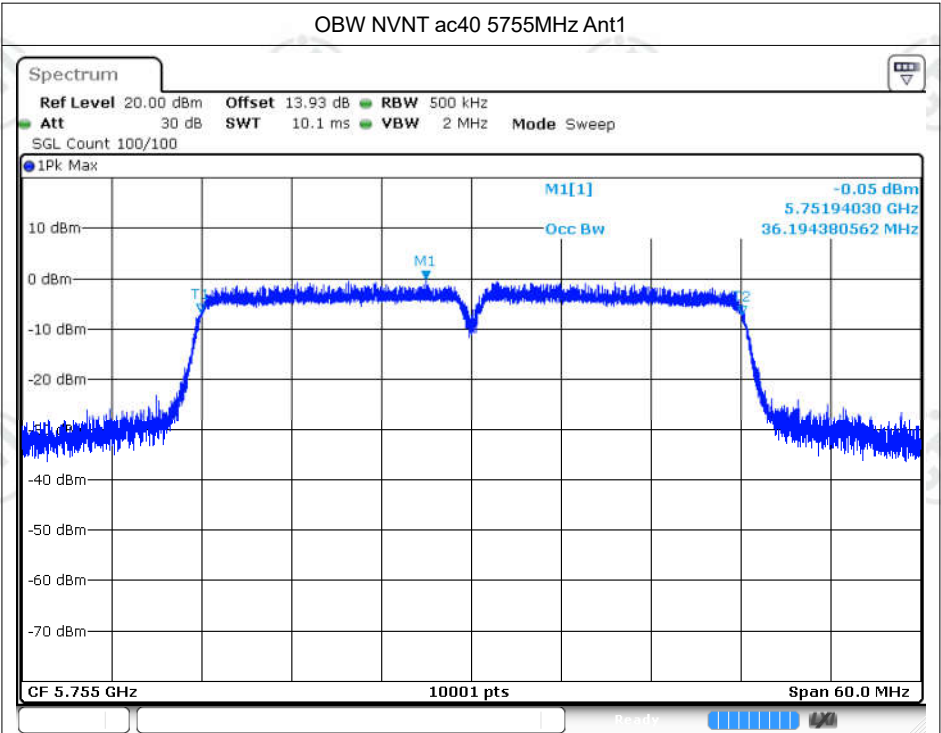

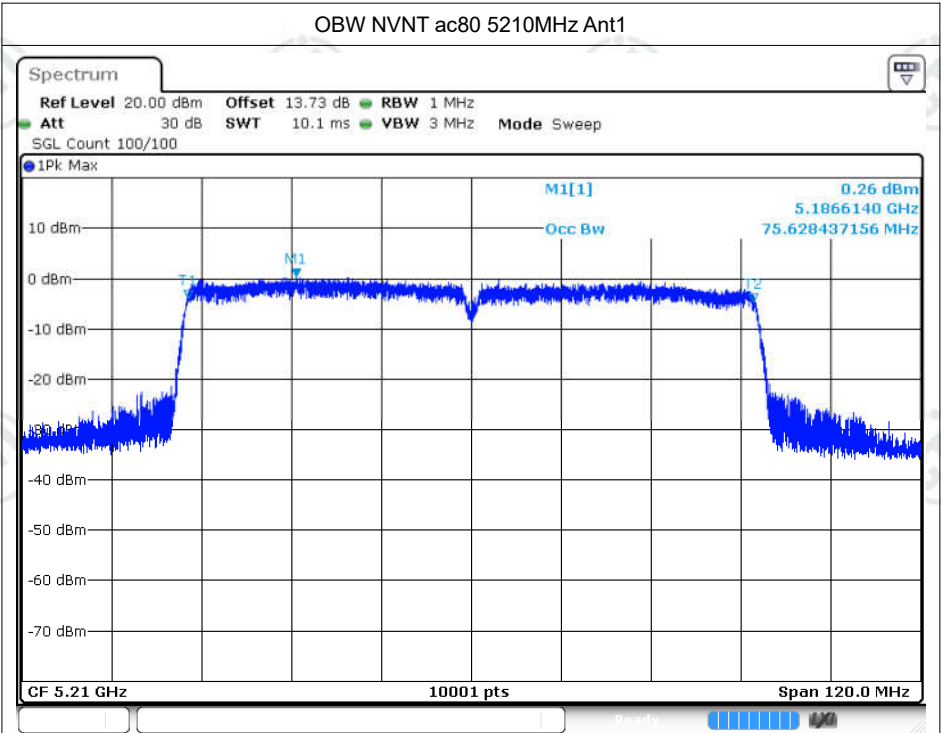


Date: 19.OCT.2023 14:40:26

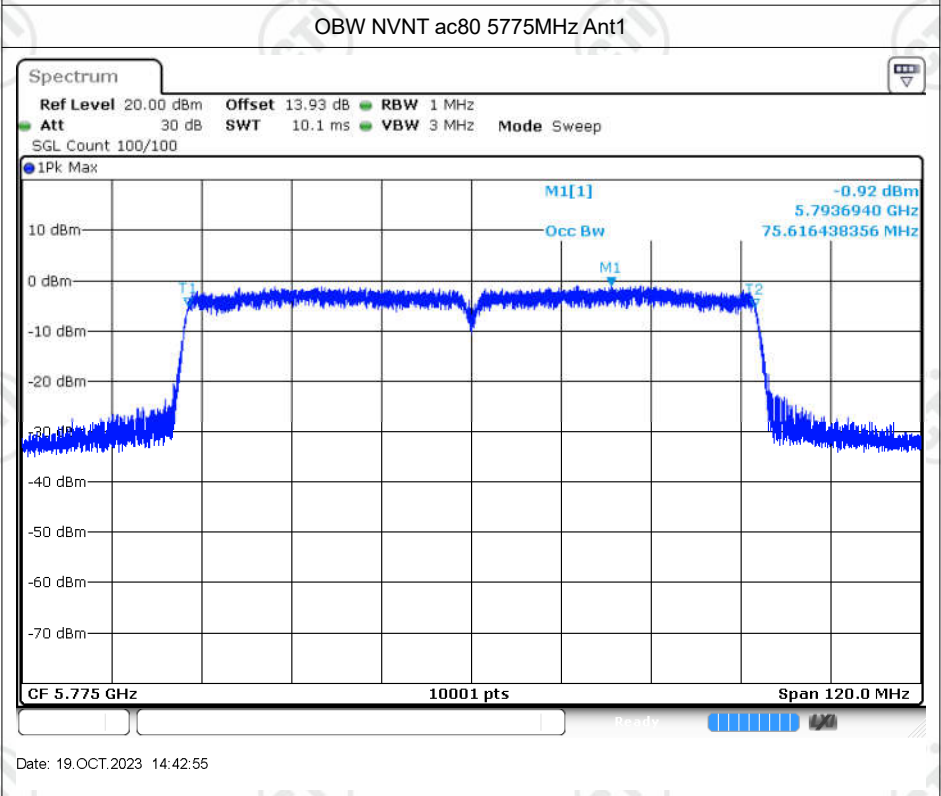


Date: 19.OCT.2023 14:42:55

## Maximum Power Spectral Density Level


| Condition | Mode | Frequency (MHz) | Antenna | Conducted PSD (dBm) | Duty Factor (dB) | Total PSD (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|---------------------|------------------|-----------------|-------------|---------|
| NVNT      | a    | 5180            | Ant1    | -5.11               | 0.51             | -4.6            | 11          | Pass    |
| NVNT      | a    | 5200            | Ant1    | -4.68               | 0.44             | -4.24           | 11          | Pass    |
| NVNT      | a    | 5240            | Ant1    | -4.31               | 0.46             | -3.85           | 11          | Pass    |
| NVNT      | a    | 5745            | Ant1    | -8.43               | 0.44             | -7.99           | 30          | Pass    |
| NVNT      | a    | 5785            | Ant1    | -8.36               | 0.44             | -7.92           | 30          | Pass    |
| NVNT      | a    | 5825            | Ant1    | -7.65               | 0.44             | -7.21           | 30          | Pass    |
| NVNT      | n20  | 5180            | Ant1    | -5.56               | 0.51             | -5.05           | 11          | Pass    |
| NVNT      | n20  | 5200            | Ant1    | -6.88               | 0.57             | -6.31           | 11          | Pass    |
| NVNT      | n20  | 5240            | Ant1    | -7.55               | 0.51             | -7.04           | 11          | Pass    |
| NVNT      | n20  | 5745            | Ant1    | -9.64               | 0.51             | -9.13           | 30          | Pass    |
| NVNT      | n20  | 5785            | Ant1    | -9.78               | 0.51             | -9.27           | 30          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | -9.57               | 0.51             | -9.06           | 30          | Pass    |
| NVNT      | n40  | 5190            | Ant1    | -11.38              | 0.97             | -10.41          | 11          | Pass    |
| NVNT      | n40  | 5230            | Ant1    | -10.42              | 0.97             | -9.45           | 11          | Pass    |
| NVNT      | n40  | 5755            | Ant1    | -15.66              | 0.96             | -14.7           | 30          | Pass    |
| NVNT      | n40  | 5795            | Ant1    | -15.38              | 0.98             | -14.4           | 30          | Pass    |
| NVNT      | ac20 | 5180            | Ant1    | -5.59               | 0.51             | -5.08           | 11          | Pass    |
| NVNT      | ac20 | 5200            | Ant1    | -7.33               | 0.51             | -6.82           | 11          | Pass    |
| NVNT      | ac20 | 5240            | Ant1    | -5.28               | 0.51             | -4.77           | 11          | Pass    |
| NVNT      | ac20 | 5745            | Ant1    | -10.19              | 0.54             | -9.65           | 30          | Pass    |
| NVNT      | ac20 | 5785            | Ant1    | -9.23               | 0.57             | -8.66           | 30          | Pass    |
| NVNT      | ac20 | 5825            | Ant1    | -9.08               | 0.51             | -8.57           | 30          | Pass    |
| NVNT      | ac40 | 5190            | Ant1    | -11.4               | 0.96             | -10.44          | 11          | Pass    |
| NVNT      | ac40 | 5230            | Ant1    | -11.63              | 1.02             | -10.61          | 11          | Pass    |
| NVNT      | ac40 | 5755            | Ant1    | -15.02              | 0.96             | -14.06          | 30          | Pass    |
| NVNT      | ac40 | 5795            | Ant1    | -15.33              | 0.96             | -14.37          | 30          | Pass    |
| NVNT      | ac80 | 5210            | Ant1    | -17.81              | 1.76             | -16.05          | 11          | Pass    |
| NVNT      | ac80 | 5775            | Ant1    | -21.97              | 1.76             | -20.21          | 30          | Pass    |

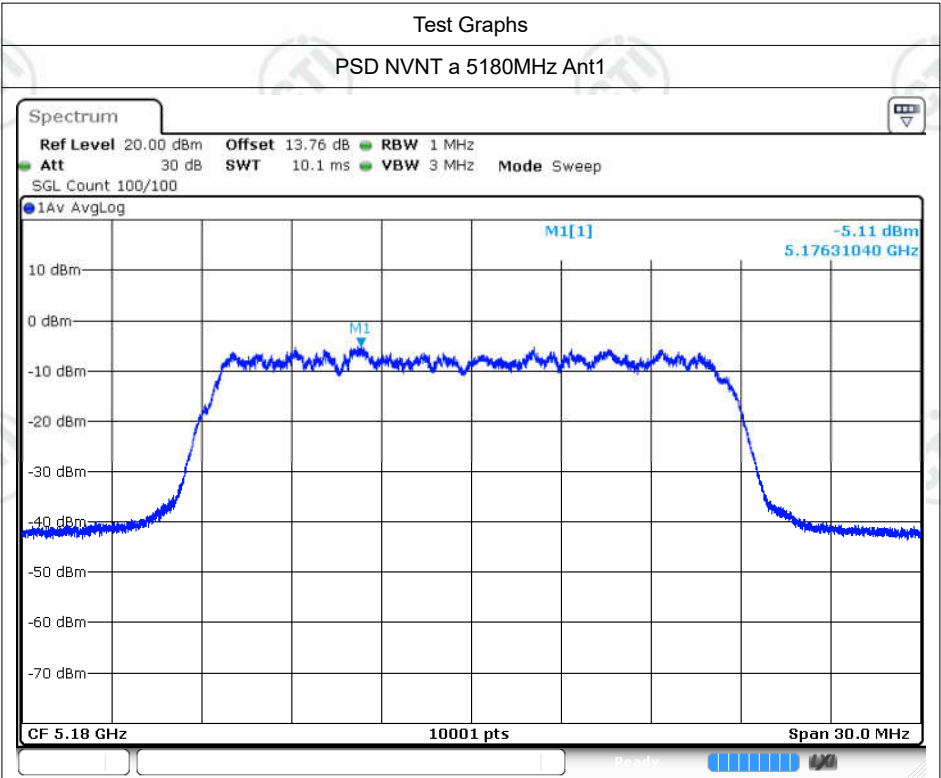


Date: 19.OCT.2023 13:26:04

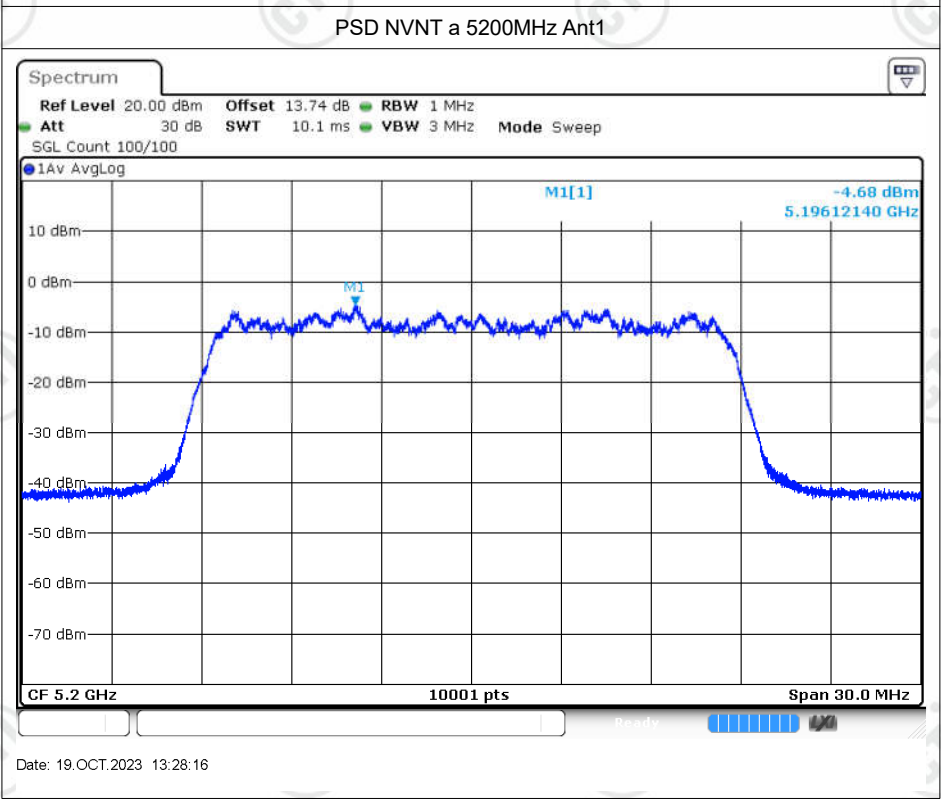


Date: 19.OCT.2023 13:28:16

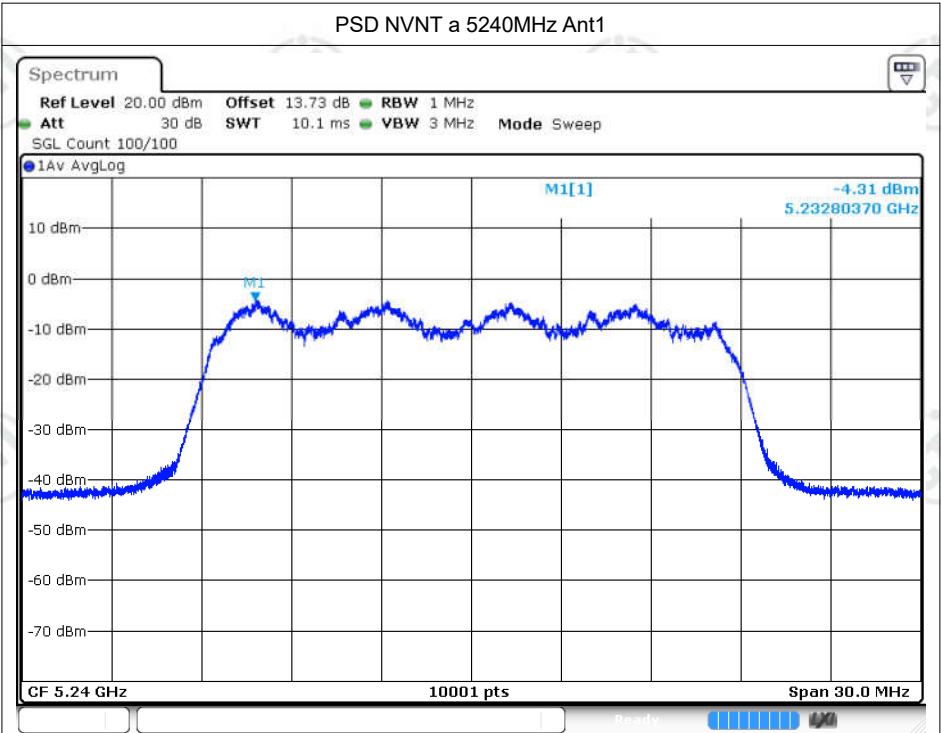


Date: 19.OCT.2023 13:29:45

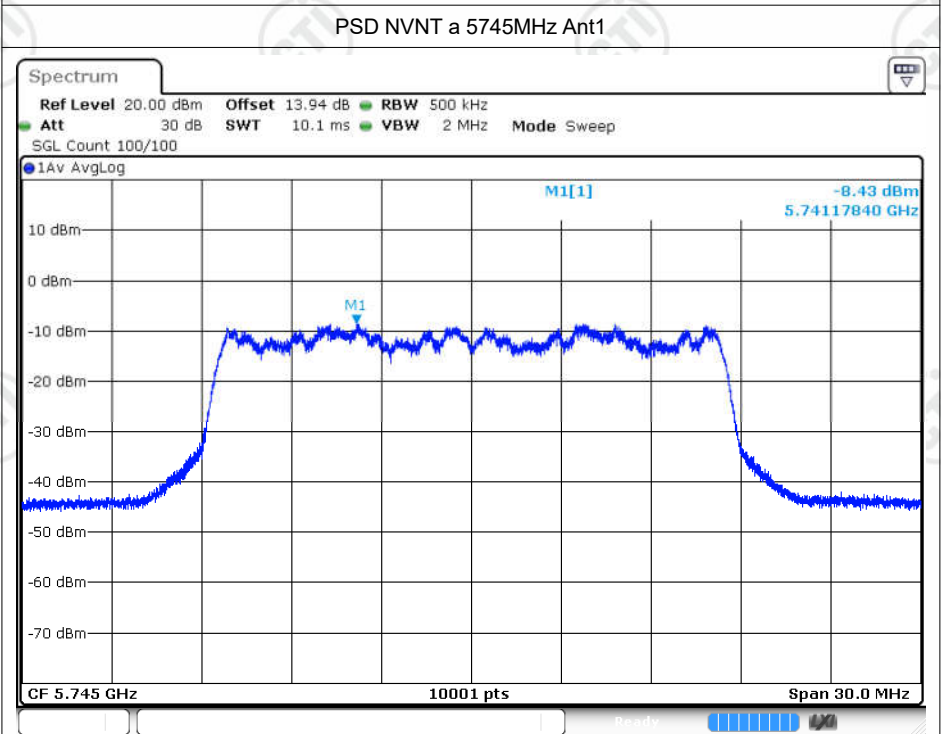


Date: 19.OCT.2023 13:32:35

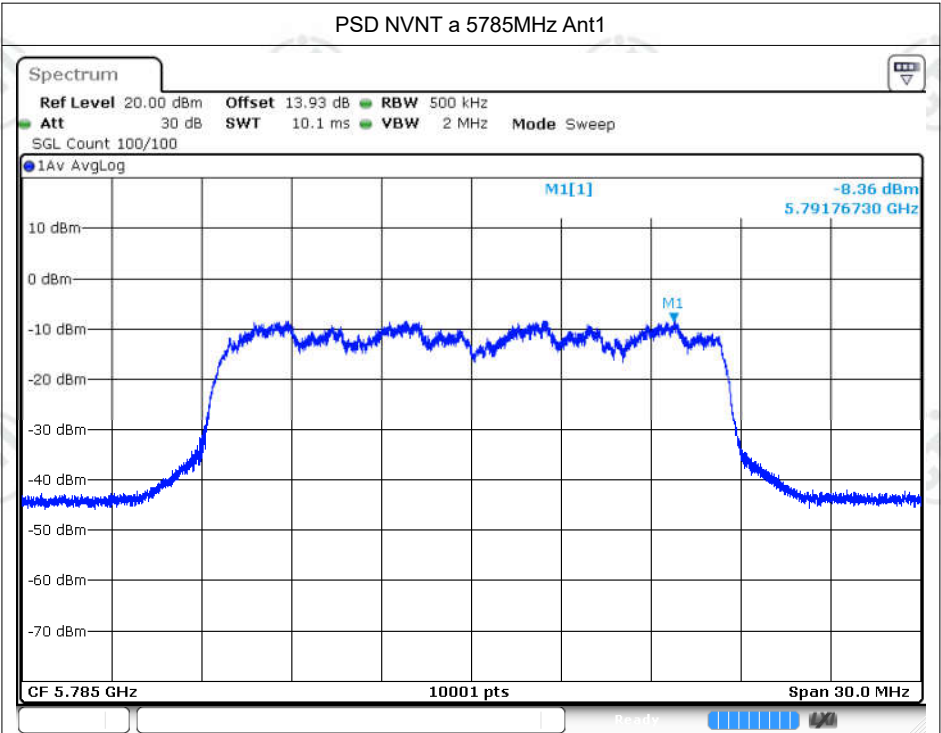


Date: 19.OCT.2023 13:36:31

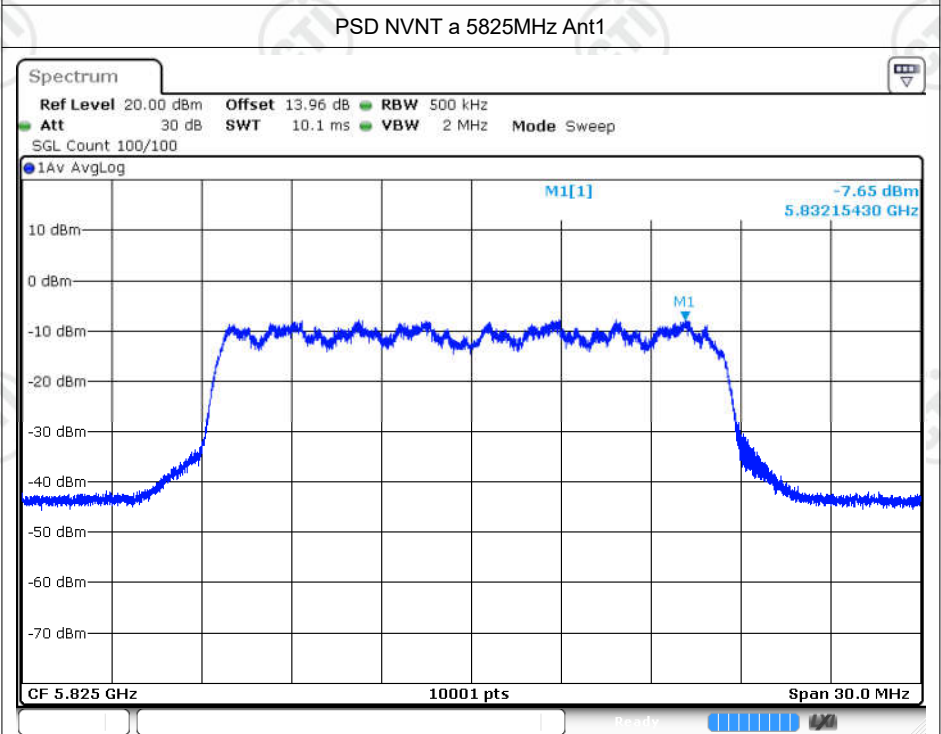



Date: 19.OCT.2023 13:43:24

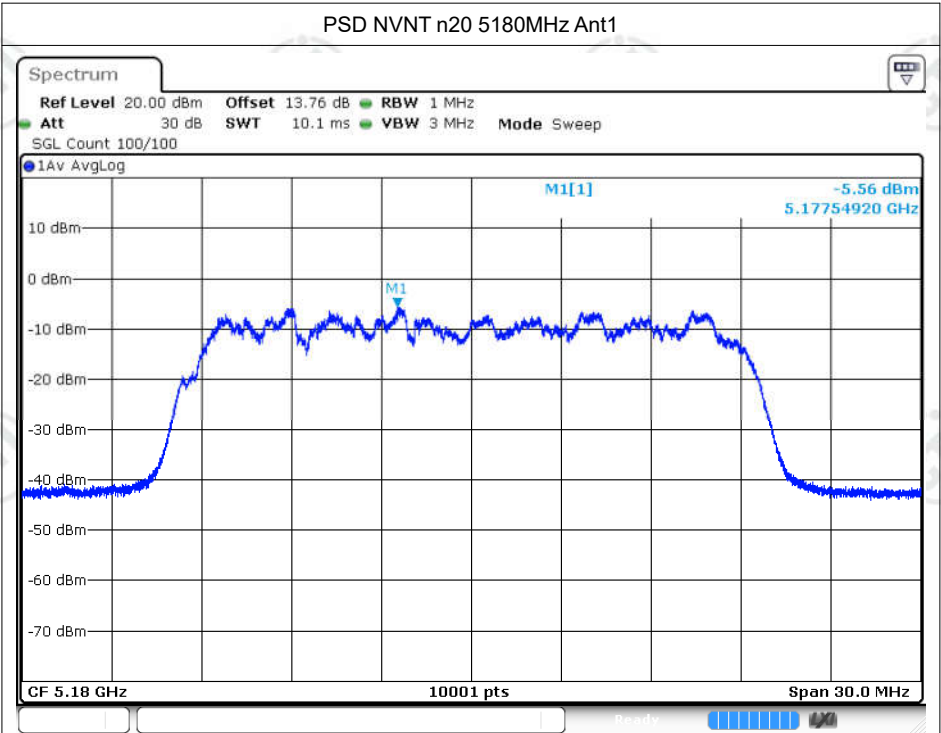


Date: 19.OCT.2023 13:45:45

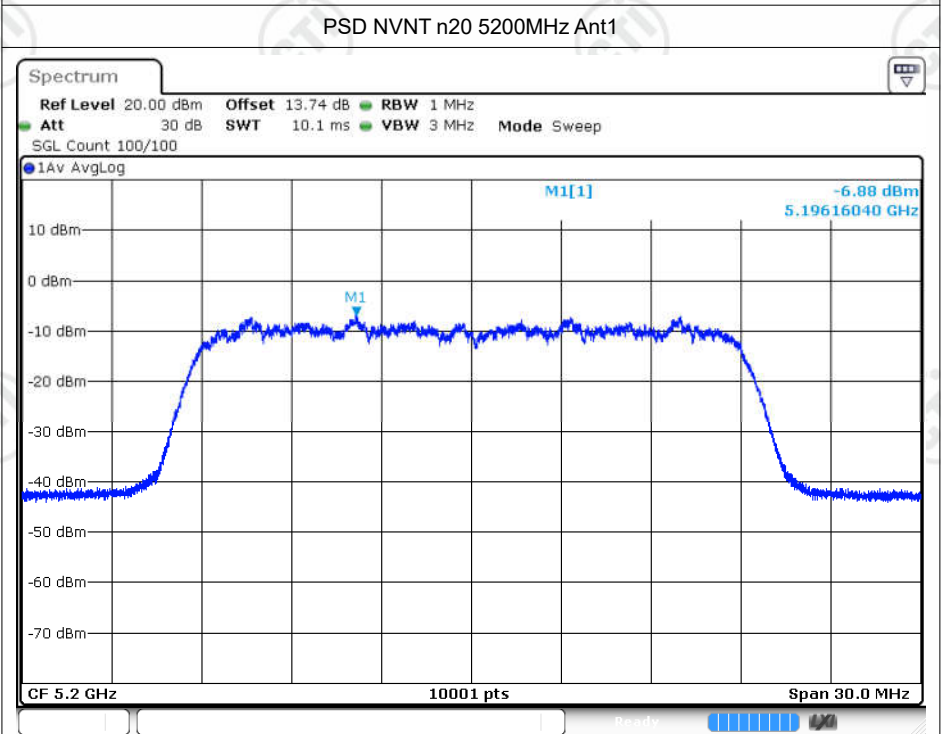


Date: 19.OCT.2023 13:47:38

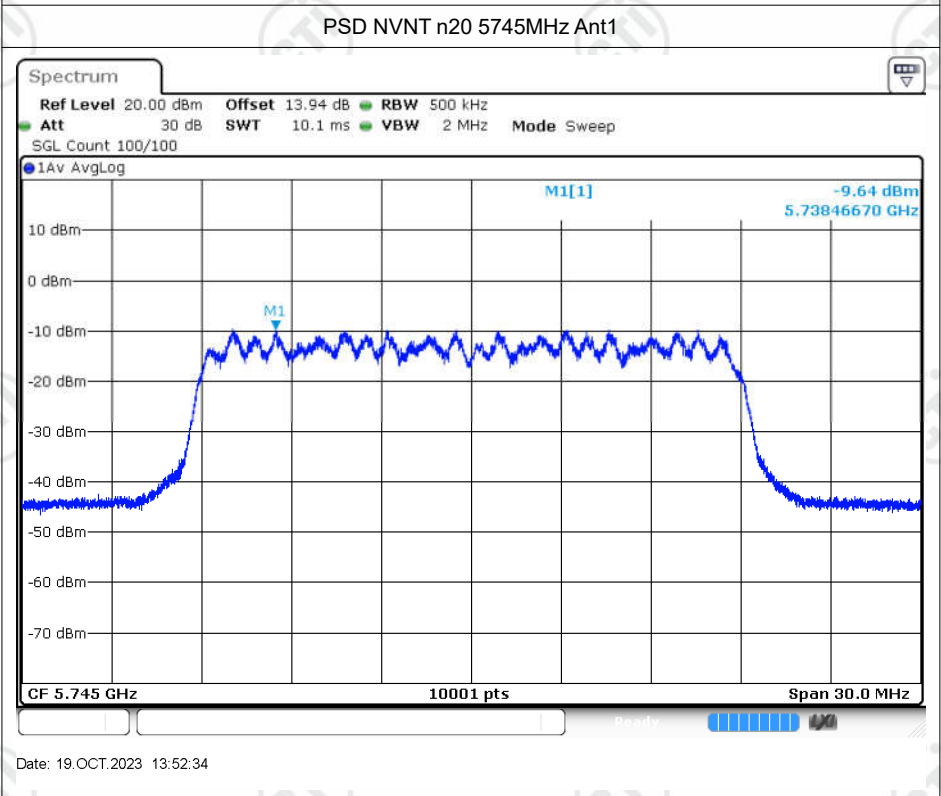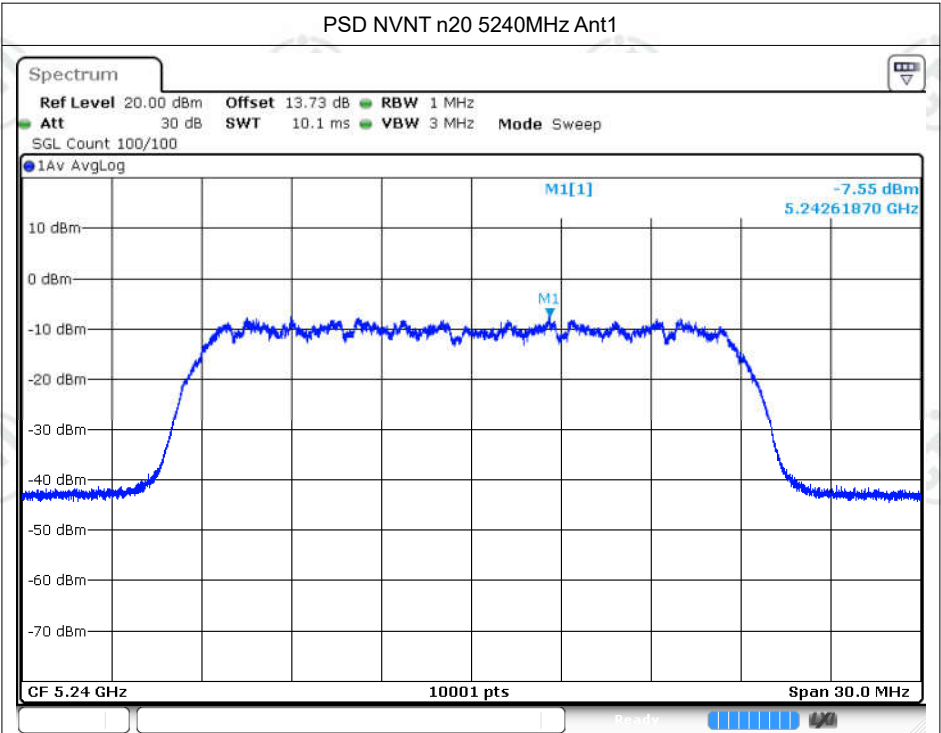


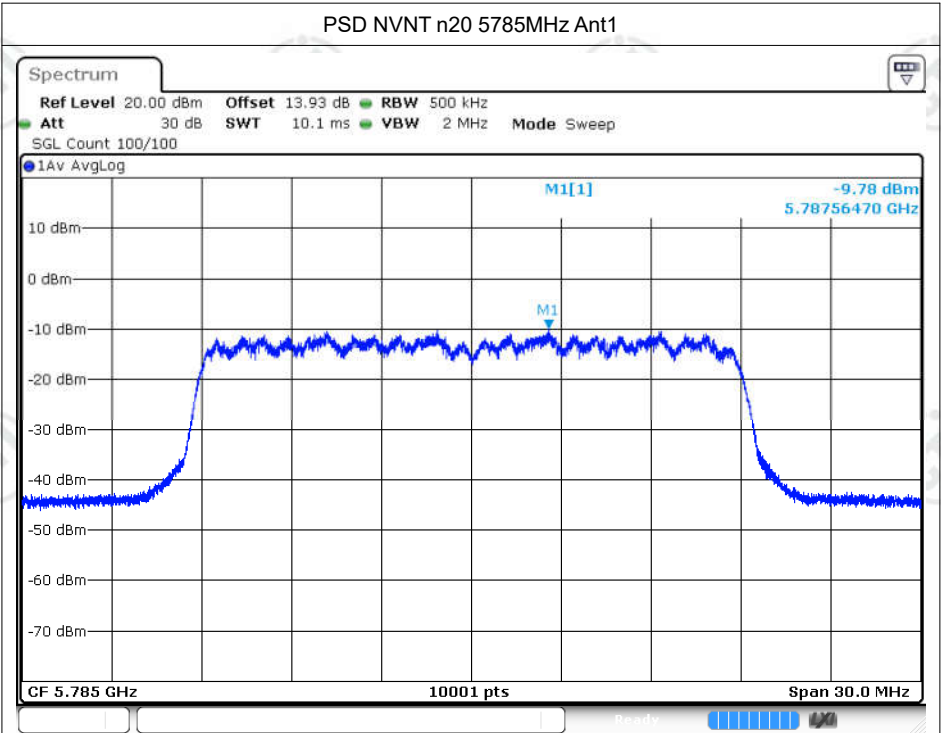


Date: 19.OCT.2023 13:55:03

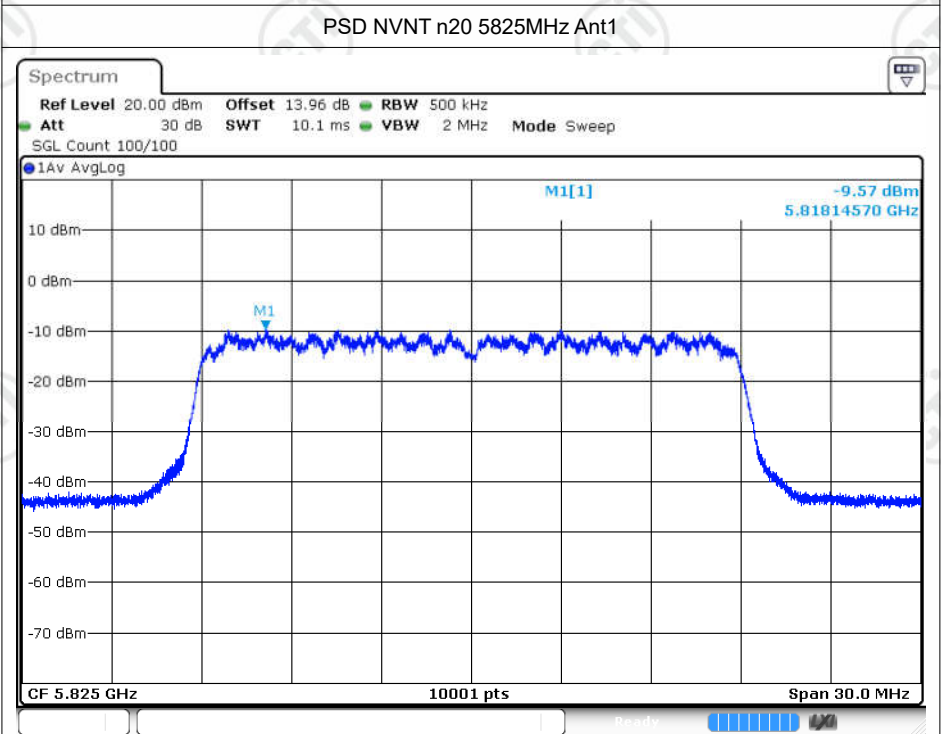


Date: 19.OCT.2023 13:56:56

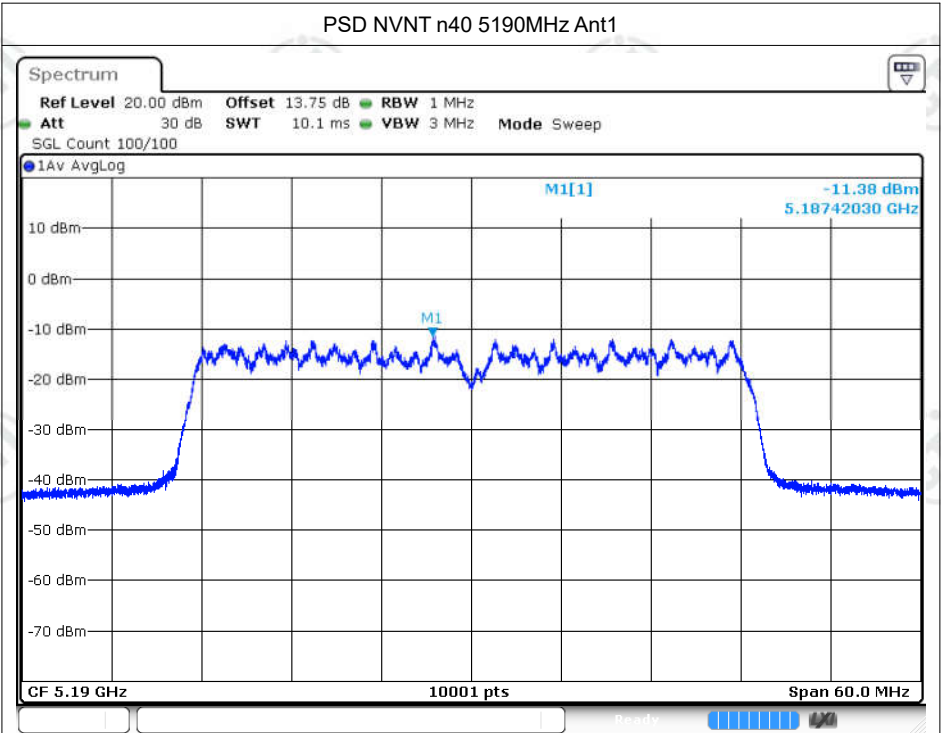


Date: 19.OCT.2023 14:04:16

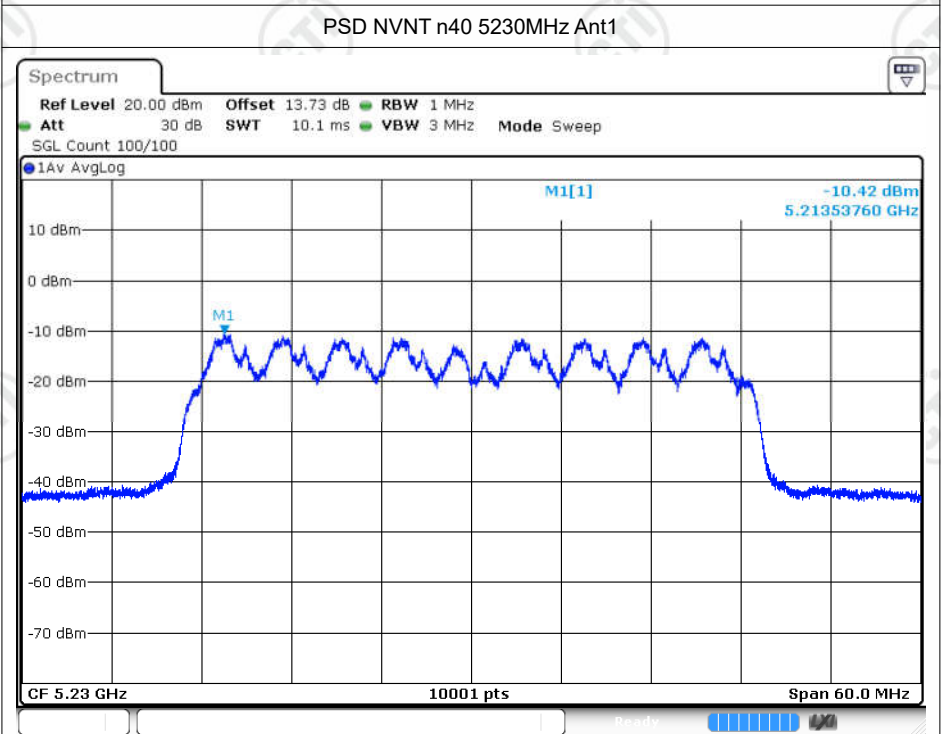


Date: 19.OCT.2023 14:06:21

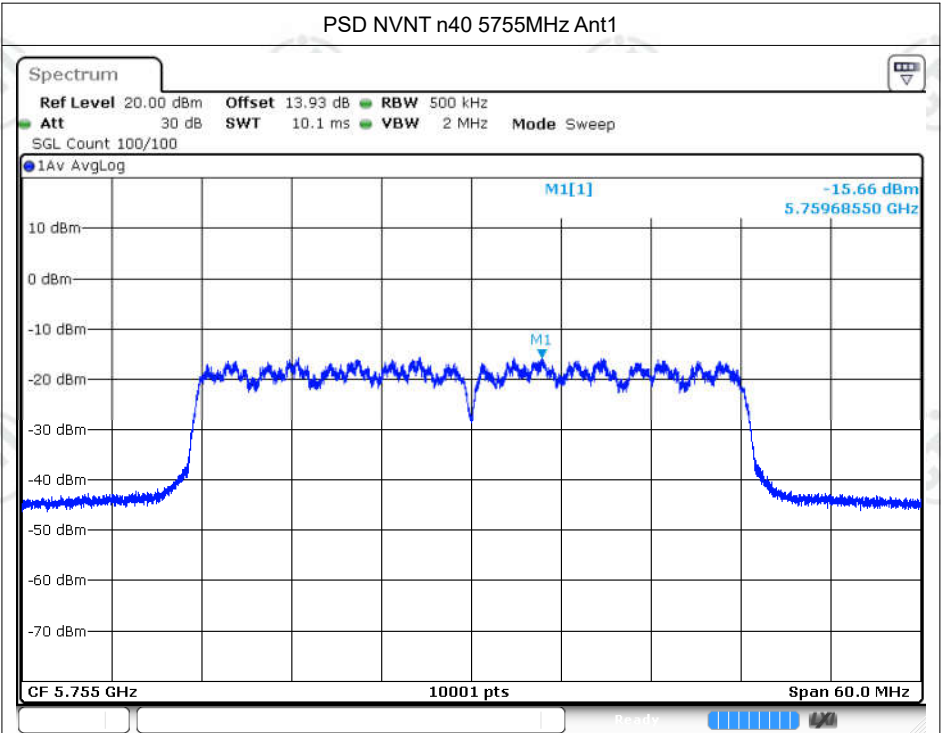


Date: 19.OCT.2023 14:08:47

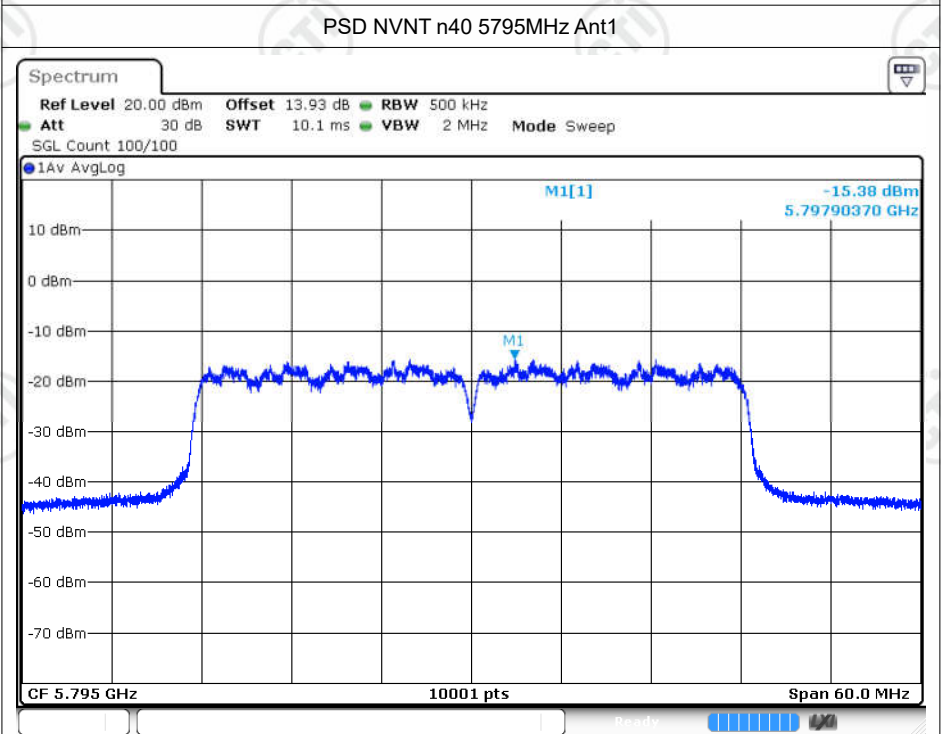


Date: 19.OCT.2023 14:10:42

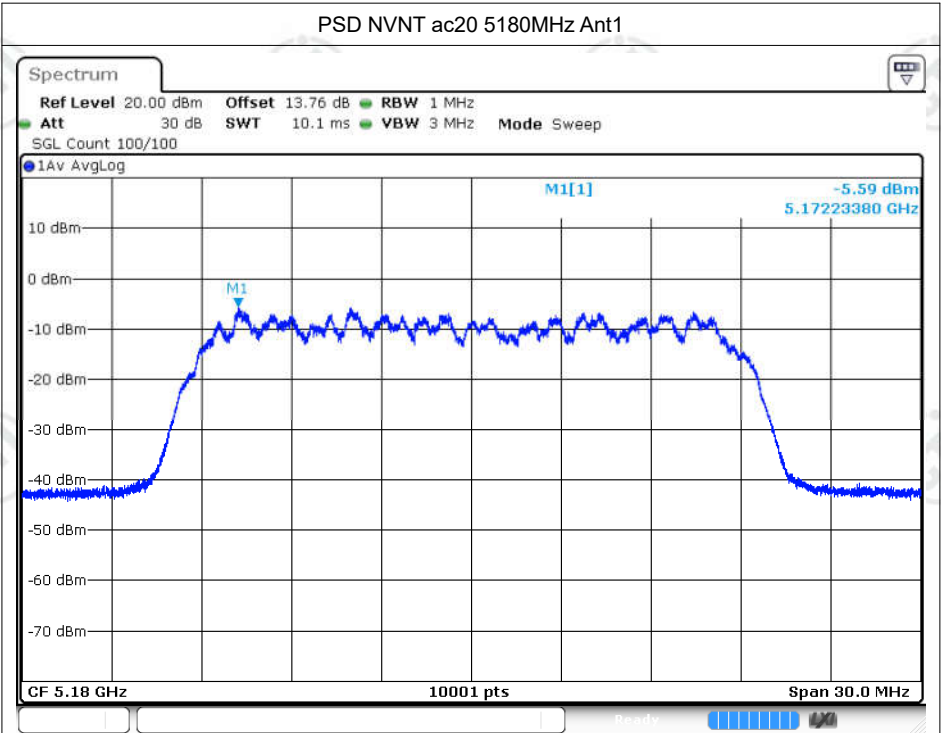


Date: 19.OCT.2023 14:13:16

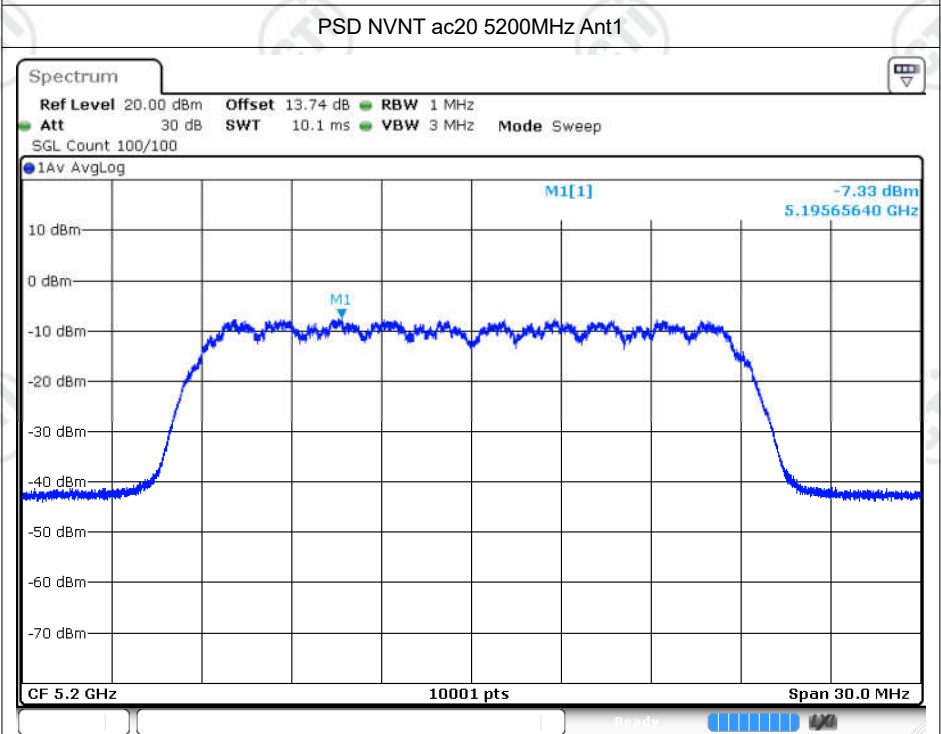


Date: 19.OCT.2023 14:15:31

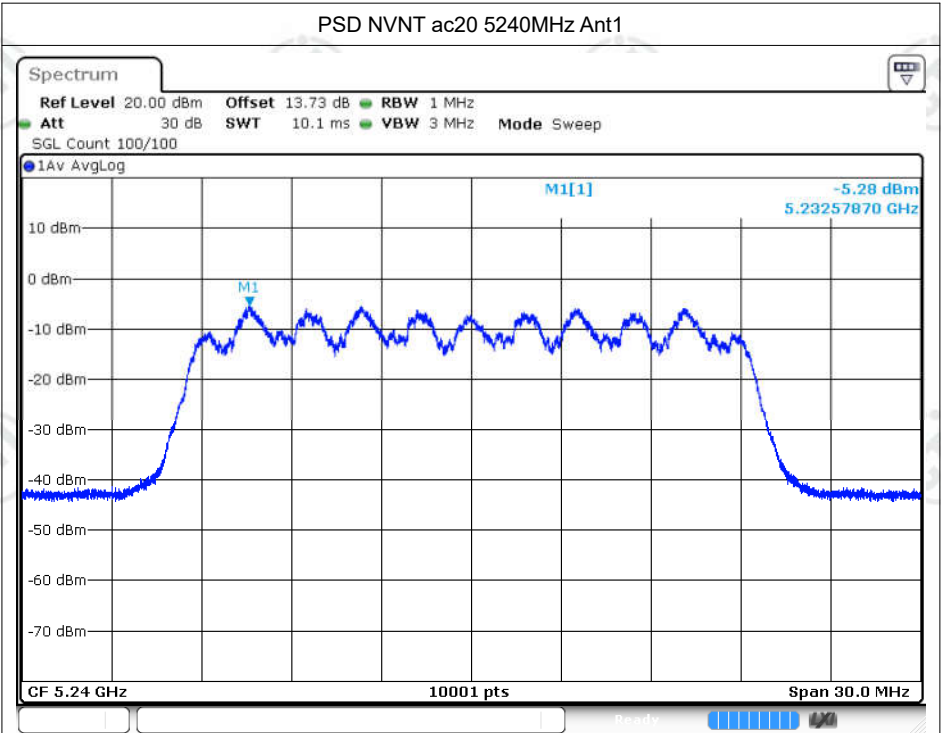


Date: 19.OCT.2023 14:17:17

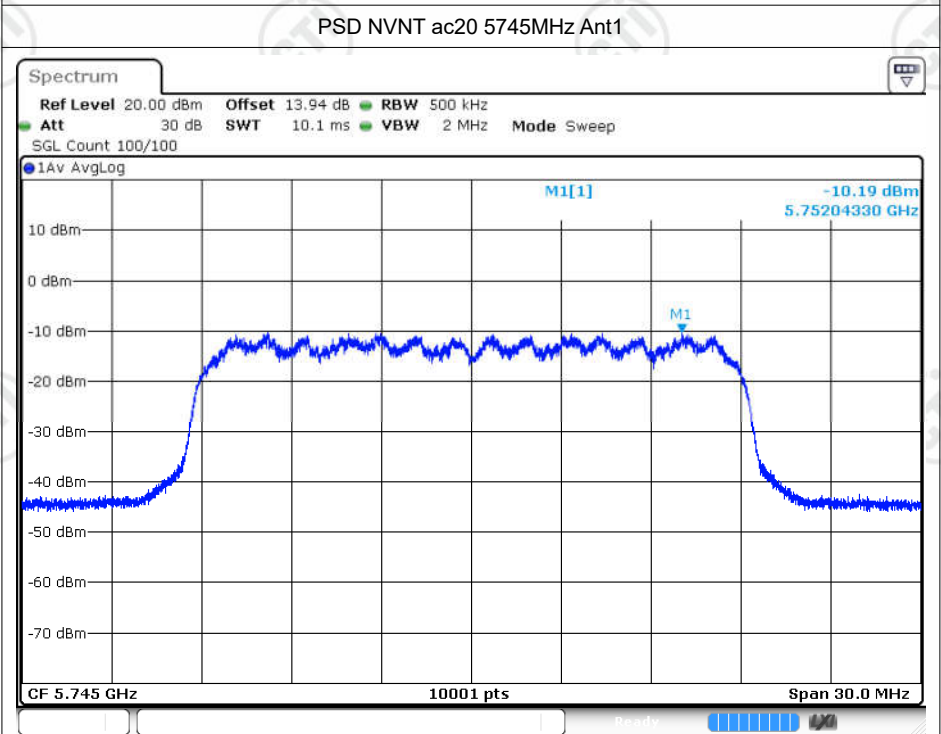


Date: 19.OCT.2023 14:19:26

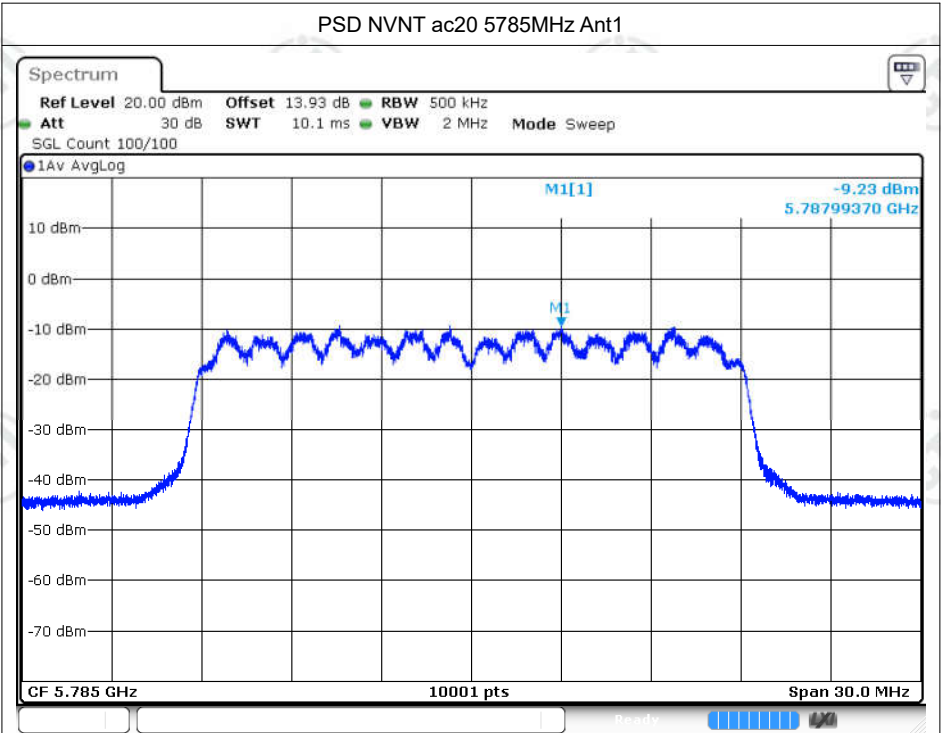


Date: 19.OCT.2023 14:21:44

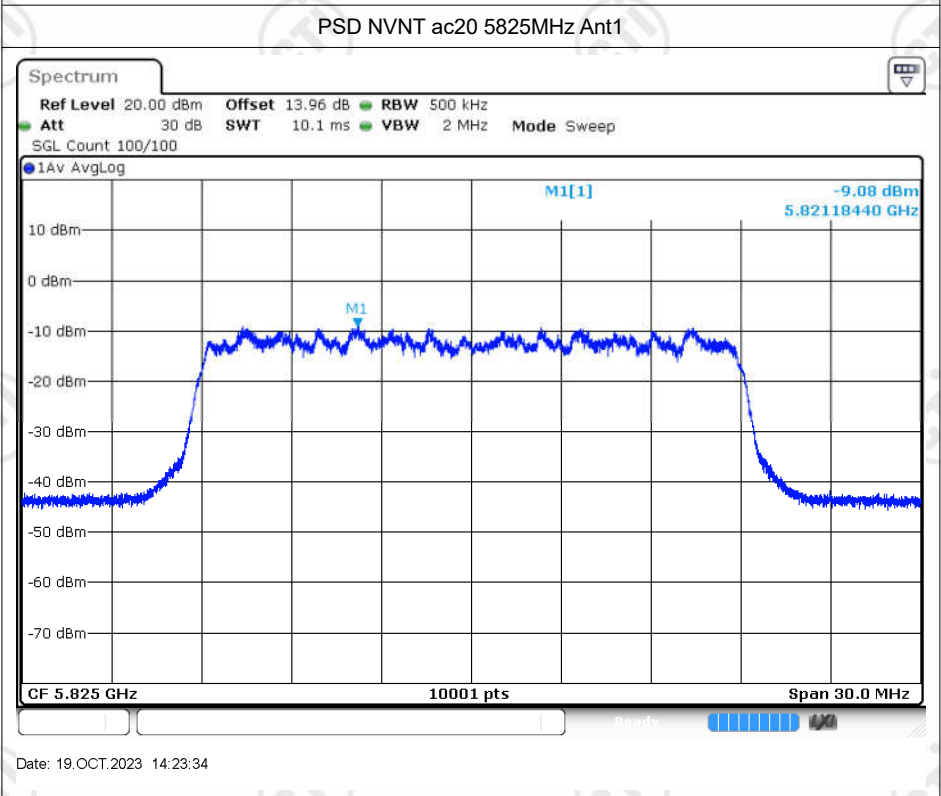


Date: 19.OCT.2023 14:23:34

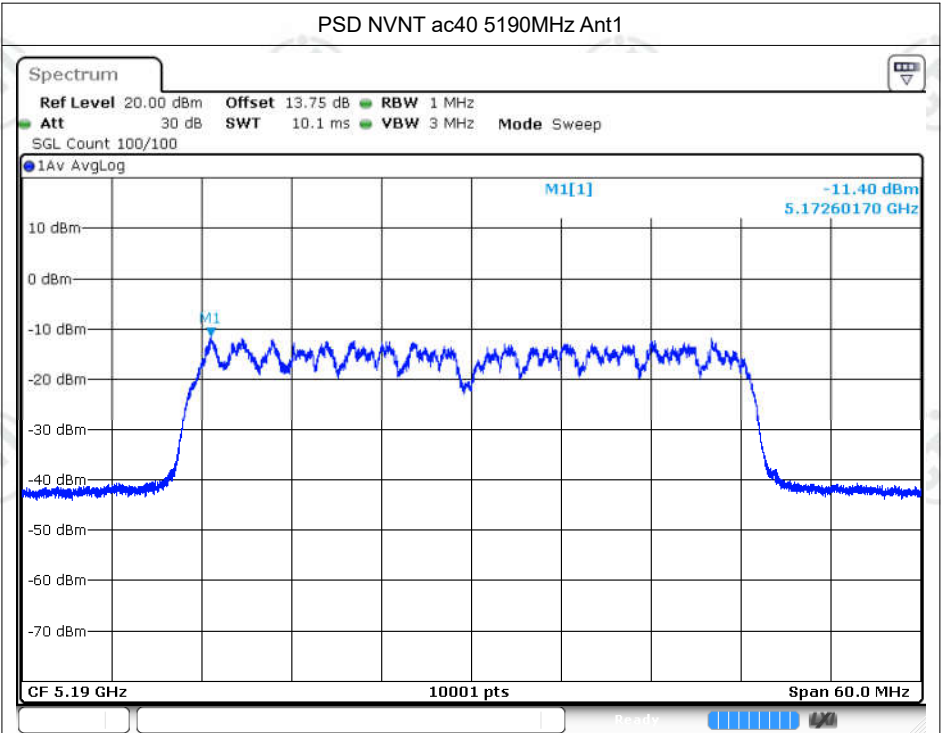


Date: 19.OCT.2023 14:26:37

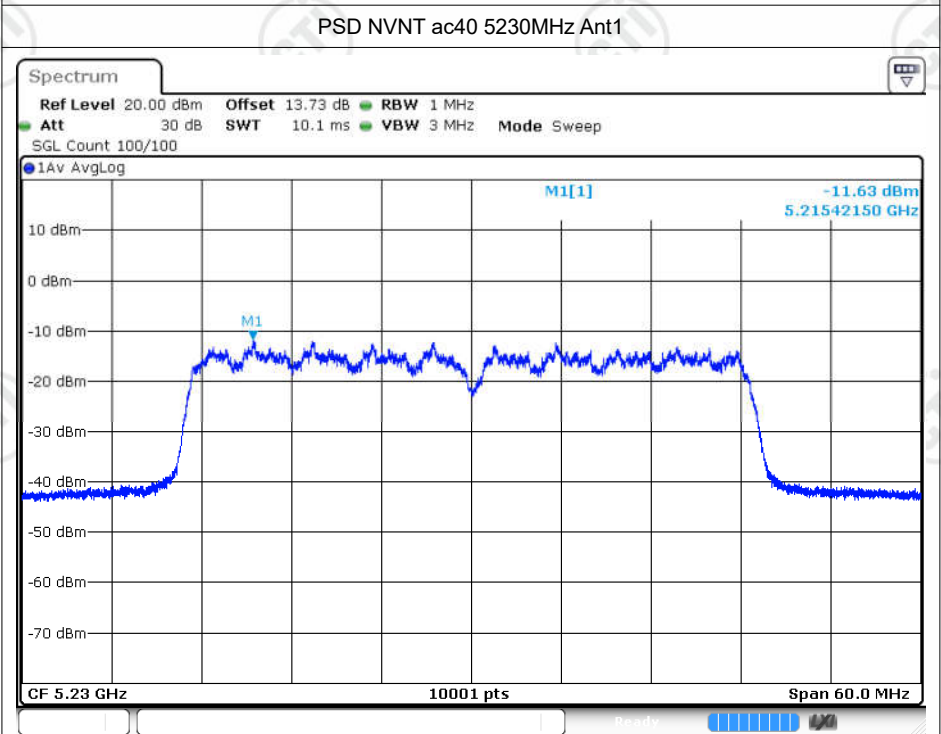


Date: 19.OCT.2023 14:30:21

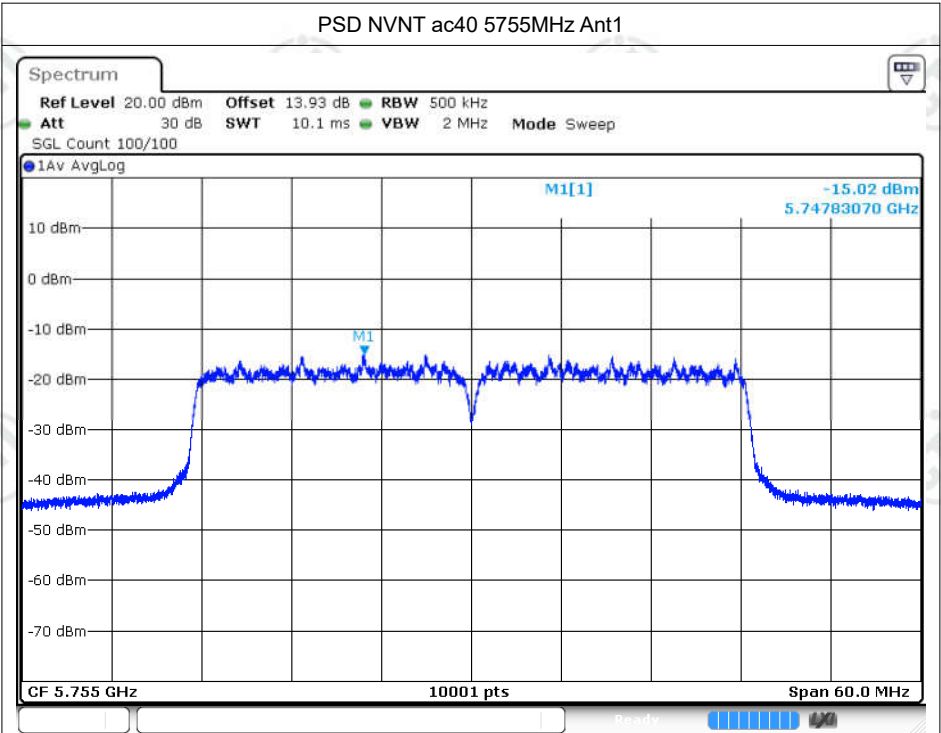


Date: 19.OCT.2023 14:35:16

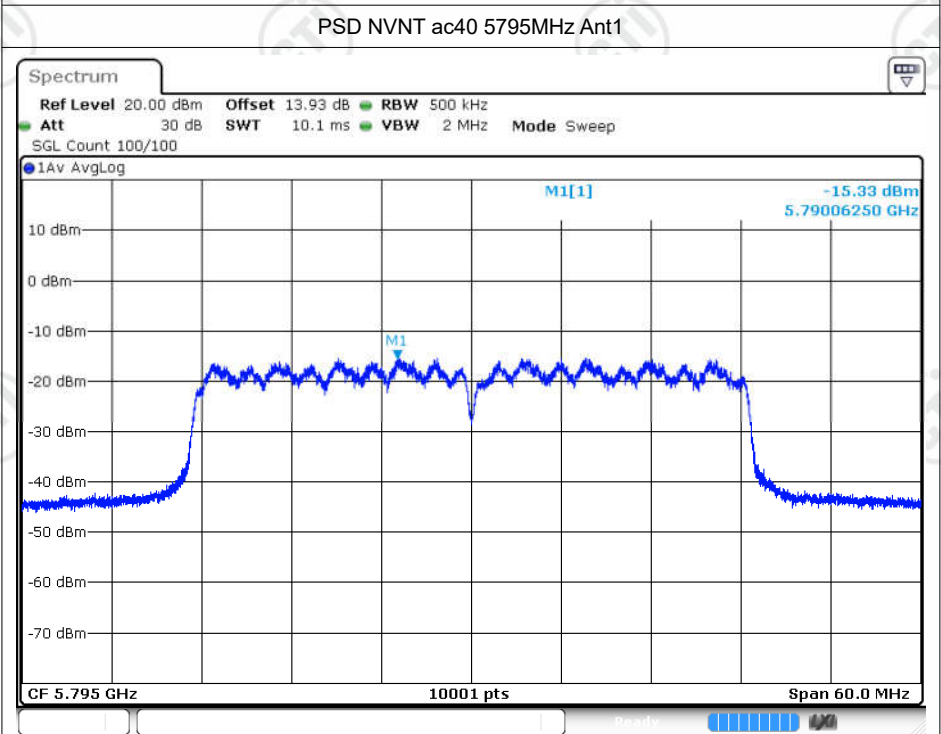

Date: 19.OCT.2023 14:38:34

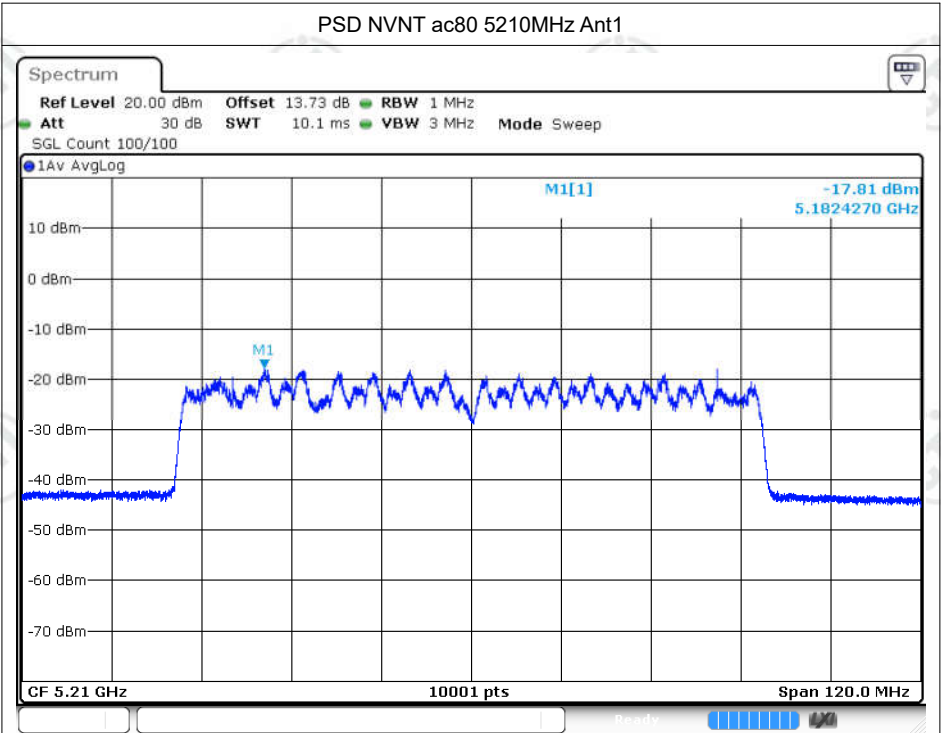

Date: 19.OCT.2023 14:40:38

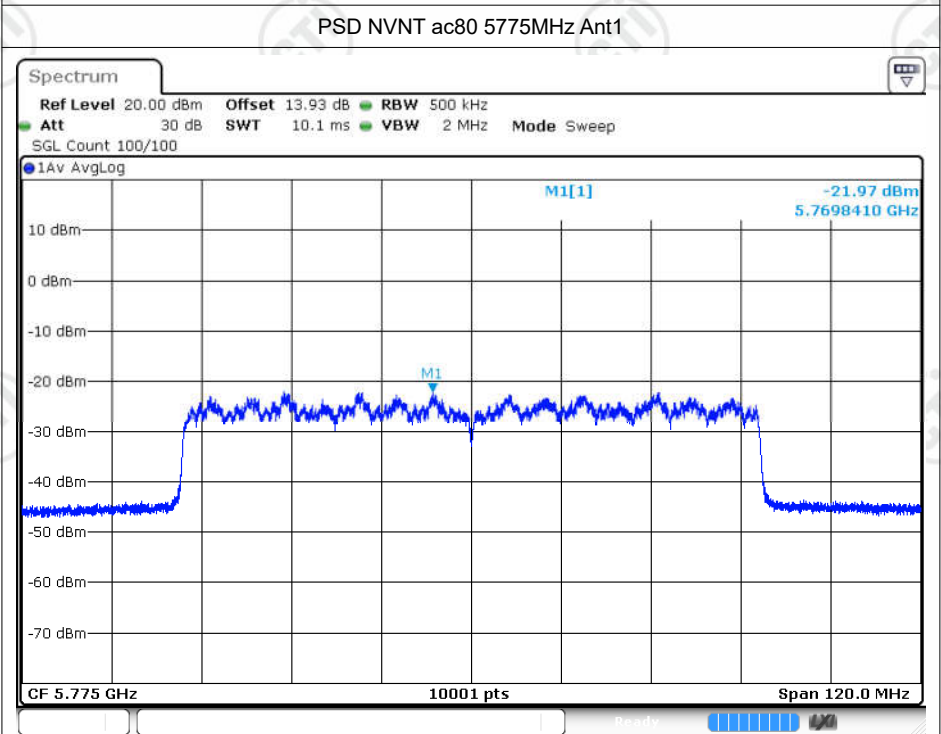

Date: 19.OCT.2023 14:43:06

## Frequency Stability

| Condition | Mode | Frequency<br>(MHz) | Antenna | Measured Frequency<br>(MHz) | Frequency Error<br>(Hz) | Deviation<br>(ppm) | Limit<br>(ppm) | Verdict |
|-----------|------|--------------------|---------|-----------------------------|-------------------------|--------------------|----------------|---------|
| 20C 102V  | a    | 5180               | Ant1    | 5179.98                     | -20000                  | -3.86              | 25             | Pass    |
| 20C 120V  | a    | 5180               | Ant1    | 5180                        | 0                       | 0                  | 25             | Pass    |
| 20C 138V  | a    | 5180               | Ant1    | 5180                        | 0                       | 0                  | 25             | Pass    |
| -20C 120V | a    | 5180               | Ant1    | 5180                        | 0                       | 0                  | 25             | Pass    |
| -10C 120V | a    | 5180               | Ant1    | 5180                        | 0                       | 0                  | 25             | Pass    |
| 0C 120V   | a    | 5180               | Ant1    | 5180                        | 0                       | 0                  | 25             | Pass    |
| 10C 120V  | a    | 5180               | Ant1    | 5180                        | 0                       | 0                  | 25             | Pass    |
| 30C 120V  | a    | 5180               | Ant1    | 5179.98                     | -20000                  | -3.86              | 25             | Pass    |
| 40C 120V  | a    | 5180               | Ant1    | 5180                        | 0                       | 0                  | 25             | Pass    |
| 50C 120V  | a    | 5180               | Ant1    | 5180                        | 0                       | 0                  | 25             | Pass    |
| 20C 102V  | a    | 5240               | Ant1    | 5240                        | 0                       | 0                  | 25             | Pass    |
| 20C 120V  | a    | 5240               | Ant1    | 5239.98                     | -20000                  | -3.82              | 25             | Pass    |
| 20C 138V  | a    | 5240               | Ant1    | 5240                        | 0                       | 0                  | 25             | Pass    |
| -20C 120V | a    | 5240               | Ant1    | 5239.98                     | -20000                  | -3.82              | 25             | Pass    |
| -10C 120V | a    | 5240               | Ant1    | 5240                        | 0                       | 0                  | 25             | Pass    |
| 0C 120V   | a    | 5240               | Ant1    | 5240                        | 0                       | 0                  | 25             | Pass    |
| 10C 120V  | a    | 5240               | Ant1    | 5240                        | 0                       | 0                  | 25             | Pass    |
| 30C 120V  | a    | 5240               | Ant1    | 5239.98                     | -20000                  | -3.82              | 25             | Pass    |
| 40C 120V  | a    | 5240               | Ant1    | 5240                        | 0                       | 0                  | 25             | Pass    |
| 50C 120V  | a    | 5240               | Ant1    | 5239.98                     | -20000                  | -3.82              | 25             | Pass    |
| 20C 102V  | a    | 5745               | Ant1    | 5745                        | 0                       | 0                  | 25             | Pass    |
| 20C 120V  | a    | 5745               | Ant1    | 5744.98                     | -20000                  | -3.48              | 25             | Pass    |
| 20C 138V  | a    | 5745               | Ant1    | 5745                        | 0                       | 0                  | 25             | Pass    |
| -20C 120V | a    | 5745               | Ant1    | 5745.02                     | 20000                   | 3.48               | 25             | Pass    |
| -10C 120V | a    | 5745               | Ant1    | 5745                        | 0                       | 0                  | 25             | Pass    |
| 0C 120V   | a    | 5745               | Ant1    | 5745                        | 0                       | 0                  | 25             | Pass    |
| 10C 120V  | a    | 5745               | Ant1    | 5745                        | 0                       | 0                  | 25             | Pass    |
| 30C 120V  | a    | 5745               | Ant1    | 5744.96                     | -40000                  | -6.96              | 25             | Pass    |
| 40C 120V  | a    | 5745               | Ant1    | 5744.98                     | -20000                  | -3.48              | 25             | Pass    |
| 50C 120V  | a    | 5745               | Ant1    | 5744.98                     | -20000                  | -3.48              | 25             | Pass    |
| 20C 102V  | a    | 5825               | Ant1    | 5824.98                     | -20000                  | -3.43              | 25             | Pass    |
| 20C 120V  | a    | 5825               | Ant1    | 5824.98                     | -20000                  | -3.43              | 25             | Pass    |
| 20C 138V  | a    | 5825               | Ant1    | 5825                        | 0                       | 0                  | 25             | Pass    |
| -20C 120V | a    | 5825               | Ant1    | 5825                        | 0                       | 0                  | 25             | Pass    |
| -10C 120V | a    | 5825               | Ant1    | 5824.98                     | -20000                  | -3.43              | 25             | Pass    |
| 0C 120V   | a    | 5825               | Ant1    | 5825                        | 0                       | 0                  | 25             | Pass    |
| 10C 120V  | a    | 5825               | Ant1    | 5825                        | 0                       | 0                  | 25             | Pass    |


|           |     |      |      |         |        |       |    |      |
|-----------|-----|------|------|---------|--------|-------|----|------|
| 30C 120V  | a   | 5825 | Ant1 | 5825    | 0      | 0     | 25 | Pass |
| 40C 120V  | a   | 5825 | Ant1 | 5825    | 0      | 0     | 25 | Pass |
| 50C 120V  | a   | 5825 | Ant1 | 5825    | 0      | 0     | 25 | Pass |
| 20C 102V  | n20 | 5180 | Ant1 | 5180    | 0      | 0     | 25 | Pass |
| 20C 120V  | n20 | 5180 | Ant1 | 5180    | 0      | 0     | 25 | Pass |
| 20C 138V  | n20 | 5180 | Ant1 | 5180    | 0      | 0     | 25 | Pass |
| -20C 120V | n20 | 5180 | Ant1 | 5179.98 | -20000 | -3.86 | 25 | Pass |
| -10C 120V | n20 | 5180 | Ant1 | 5179.98 | -20000 | -3.86 | 25 | Pass |
| 0C 120V   | n20 | 5180 | Ant1 | 5180    | 0      | 0     | 25 | Pass |
| 10C 120V  | n20 | 5180 | Ant1 | 5180    | 0      | 0     | 25 | Pass |
| 30C 120V  | n20 | 5180 | Ant1 | 5179.96 | -40000 | -7.72 | 25 | Pass |
| 40C 120V  | n20 | 5180 | Ant1 | 5180    | 0      | 0     | 25 | Pass |
| 50C 120V  | n20 | 5180 | Ant1 | 5179.98 | -20000 | -3.86 | 25 | Pass |
| 20C 102V  | n20 | 5240 | Ant1 | 5240.02 | 20000  | 3.82  | 25 | Pass |
| 20C 120V  | n20 | 5240 | Ant1 | 5240    | 0      | 0     | 25 | Pass |
| 20C 138V  | n20 | 5240 | Ant1 | 5240    | 0      | 0     | 25 | Pass |
| -20C 120V | n20 | 5240 | Ant1 | 5240    | 0      | 0     | 25 | Pass |
| -10C 120V | n20 | 5240 | Ant1 | 5239.96 | -40000 | -7.63 | 25 | Pass |
| 0C 120V   | n20 | 5240 | Ant1 | 5240    | 0      | 0     | 25 | Pass |
| 10C 120V  | n20 | 5240 | Ant1 | 5239.98 | -20000 | -3.82 | 25 | Pass |
| 30C 120V  | n20 | 5240 | Ant1 | 5239.98 | -20000 | -3.82 | 25 | Pass |
| 40C 120V  | n20 | 5240 | Ant1 | 5240    | 0      | 0     | 25 | Pass |
| 50C 120V  | n20 | 5240 | Ant1 | 5239.96 | -40000 | -7.63 | 25 | Pass |
| 20C 102V  | n20 | 5745 | Ant1 | 5745.02 | 20000  | 3.48  | 25 | Pass |
| 20C 120V  | n20 | 5745 | Ant1 | 5744.98 | -20000 | -3.48 | 25 | Pass |
| 20C 138V  | n20 | 5745 | Ant1 | 5745    | 0      | 0     | 25 | Pass |
| -20C 120V | n20 | 5745 | Ant1 | 5744.98 | -20000 | -3.48 | 25 | Pass |
| -10C 120V | n20 | 5745 | Ant1 | 5744.98 | -20000 | -3.48 | 25 | Pass |
| 0C 120V   | n20 | 5745 | Ant1 | 5744.98 | -20000 | -3.48 | 25 | Pass |
| 10C 120V  | n20 | 5745 | Ant1 | 5745.02 | 20000  | 3.48  | 25 | Pass |
| 30C 120V  | n20 | 5745 | Ant1 | 5745    | 0      | 0     | 25 | Pass |
| 40C 120V  | n20 | 5745 | Ant1 | 5745    | 0      | 0     | 25 | Pass |
| 50C 120V  | n20 | 5745 | Ant1 | 5744.98 | -20000 | -3.48 | 25 | Pass |
| 20C 102V  | n20 | 5825 | Ant1 | 5825    | 0      | 0     | 25 | Pass |
| 20C 120V  | n20 | 5825 | Ant1 | 5825.02 | 20000  | 3.43  | 25 | Pass |
| 20C 138V  | n20 | 5825 | Ant1 | 5824.98 | -20000 | -3.43 | 25 | Pass |
| -20C 120V | n20 | 5825 | Ant1 | 5824.98 | -20000 | -3.43 | 25 | Pass |
| -10C 120V | n20 | 5825 | Ant1 | 5825.02 | 20000  | 3.43  | 25 | Pass |
| 0C 120V   | n20 | 5825 | Ant1 | 5824.96 | -40000 | -6.87 | 25 | Pass |
| 10C 120V  | n20 | 5825 | Ant1 | 5824.98 | -20000 | -3.43 | 25 | Pass |
| 30C 120V  | n20 | 5825 | Ant1 | 5824.98 | -20000 | -3.43 | 25 | Pass |
| 40C 120V  | n20 | 5825 | Ant1 | 5824.96 | -40000 | -6.87 | 25 | Pass |

|           |      |      |      |         |        |       |    |      |
|-----------|------|------|------|---------|--------|-------|----|------|
| 50C 120V  | n20  | 5825 | Ant1 | 5825.04 | 40000  | 6.87  | 25 | Pass |
| 20C 102V  | n40  | 5190 | Ant1 | 5189.96 | -40000 | -7.71 | 25 | Pass |
| 20C 120V  | n40  | 5190 | Ant1 | 5190    | 0      | 0     | 25 | Pass |
| 20C 138V  | n40  | 5190 | Ant1 | 5190    | 0      | 0     | 25 | Pass |
| -20C 120V | n40  | 5190 | Ant1 | 5189.96 | -40000 | -7.71 | 25 | Pass |
| -10C 120V | n40  | 5190 | Ant1 | 5189.96 | -40000 | -7.71 | 25 | Pass |
| 0C 120V   | n40  | 5190 | Ant1 | 5190    | 0      | 0     | 25 | Pass |
| 10C 120V  | n40  | 5190 | Ant1 | 5190    | 0      | 0     | 25 | Pass |
| 30C 120V  | n40  | 5190 | Ant1 | 5189.96 | -40000 | -7.71 | 25 | Pass |
| 40C 120V  | n40  | 5190 | Ant1 | 5190    | 0      | 0     | 25 | Pass |
| 50C 120V  | n40  | 5190 | Ant1 | 5190    | 0      | 0     | 25 | Pass |
| 20C 102V  | n40  | 5230 | Ant1 | 5229.96 | -40000 | -7.65 | 25 | Pass |
| 20C 120V  | n40  | 5230 | Ant1 | 5229.96 | -40000 | -7.65 | 25 | Pass |
| 20C 138V  | n40  | 5230 | Ant1 | 5229.92 | -80000 | -15.3 | 25 | Pass |
| -20C 120V | n40  | 5230 | Ant1 | 5230    | 0      | 0     | 25 | Pass |
| -10C 120V | n40  | 5230 | Ant1 | 5229.96 | -40000 | -7.65 | 25 | Pass |
| 0C 120V   | n40  | 5230 | Ant1 | 5229.96 | -40000 | -7.65 | 25 | Pass |
| 10C 120V  | n40  | 5230 | Ant1 | 5230    | 0      | 0     | 25 | Pass |
| 30C 120V  | n40  | 5230 | Ant1 | 5230    | 0      | 0     | 25 | Pass |
| 40C 120V  | n40  | 5230 | Ant1 | 5230    | 0      | 0     | 25 | Pass |
| 50C 120V  | n40  | 5230 | Ant1 | 5229.96 | -40000 | -7.65 | 25 | Pass |
| 20C 102V  | n40  | 5755 | Ant1 | 5755    | 0      | 0     | 25 | Pass |
| 20C 120V  | n40  | 5755 | Ant1 | 5755    | 0      | 0     | 25 | Pass |
| 20C 138V  | n40  | 5755 | Ant1 | 5755    | 0      | 0     | 25 | Pass |
| -20C 120V | n40  | 5755 | Ant1 | 5754.96 | -40000 | -6.95 | 25 | Pass |
| -10C 120V | n40  | 5755 | Ant1 | 5755    | 0      | 0     | 25 | Pass |
| 0C 120V   | n40  | 5755 | Ant1 | 5755    | 0      | 0     | 25 | Pass |
| 10C 120V  | n40  | 5755 | Ant1 | 5754.96 | -40000 | -6.95 | 25 | Pass |
| 30C 120V  | n40  | 5755 | Ant1 | 5755    | 0      | 0     | 25 | Pass |
| 40C 120V  | n40  | 5755 | Ant1 | 5755    | 0      | 0     | 25 | Pass |
| 50C 120V  | n40  | 5755 | Ant1 | 5754.96 | -40000 | -6.95 | 25 | Pass |
| 20C 102V  | n40  | 5795 | Ant1 | 5795    | 0      | 0     | 25 | Pass |
| 20C 120V  | n40  | 5795 | Ant1 | 5794.96 | -40000 | -6.9  | 25 | Pass |
| 20C 138V  | n40  | 5795 | Ant1 | 5795    | 0      | 0     | 25 | Pass |
| -20C 120V | n40  | 5795 | Ant1 | 5795    | 0      | 0     | 25 | Pass |
| -10C 120V | n40  | 5795 | Ant1 | 5795.04 | 40000  | 6.9   | 25 | Pass |
| 0C 120V   | n40  | 5795 | Ant1 | 5795    | 0      | 0     | 25 | Pass |
| 10C 120V  | n40  | 5795 | Ant1 | 5795    | 0      | 0     | 25 | Pass |
| 30C 120V  | n40  | 5795 | Ant1 | 5795    | 0      | 0     | 25 | Pass |
| 40C 120V  | n40  | 5795 | Ant1 | 5794.96 | -40000 | -6.9  | 25 | Pass |
| 50C 120V  | n40  | 5795 | Ant1 | 5795    | 0      | 0     | 25 | Pass |
| 20C 102V  | ac20 | 5180 | Ant1 | 5180    | 0      | 0     | 25 | Pass |


|           |      |      |      |         |        |       |    |      |
|-----------|------|------|------|---------|--------|-------|----|------|
| 20C 120V  | ac20 | 5180 | Ant1 | 5180.02 | 20000  | 3.86  | 25 | Pass |
| 20C 138V  | ac20 | 5180 | Ant1 | 5179.98 | -20000 | -3.86 | 25 | Pass |
| -20C 120V | ac20 | 5180 | Ant1 | 5180    | 0      | 0     | 25 | Pass |
| -10C 120V | ac20 | 5180 | Ant1 | 5180    | 0      | 0     | 25 | Pass |
| 0C 120V   | ac20 | 5180 | Ant1 | 5180    | 0      | 0     | 25 | Pass |
| 10C 120V  | ac20 | 5180 | Ant1 | 5179.98 | -20000 | -3.86 | 25 | Pass |
| 30C 120V  | ac20 | 5180 | Ant1 | 5179.98 | -20000 | -3.86 | 25 | Pass |
| 40C 120V  | ac20 | 5180 | Ant1 | 5180    | 0      | 0     | 25 | Pass |
| 50C 120V  | ac20 | 5180 | Ant1 | 5180    | 0      | 0     | 25 | Pass |
| 20C 102V  | ac20 | 5240 | Ant1 | 5240    | 0      | 0     | 25 | Pass |
| 20C 120V  | ac20 | 5240 | Ant1 | 5240    | 0      | 0     | 25 | Pass |
| 20C 138V  | ac20 | 5240 | Ant1 | 5239.98 | -20000 | -3.82 | 25 | Pass |
| -20C 120V | ac20 | 5240 | Ant1 | 5239.98 | -20000 | -3.82 | 25 | Pass |
| -10C 120V | ac20 | 5240 | Ant1 | 5240    | 0      | 0     | 25 | Pass |
| 0C 120V   | ac20 | 5240 | Ant1 | 5239.96 | -40000 | -7.63 | 25 | Pass |
| 10C 120V  | ac20 | 5240 | Ant1 | 5239.98 | -20000 | -3.82 | 25 | Pass |
| 30C 120V  | ac20 | 5240 | Ant1 | 5240.02 | 20000  | 3.82  | 25 | Pass |
| 40C 120V  | ac20 | 5240 | Ant1 | 5240    | 0      | 0     | 25 | Pass |
| 50C 120V  | ac20 | 5240 | Ant1 | 5239.98 | -20000 | -3.82 | 25 | Pass |
| 20C 102V  | ac20 | 5745 | Ant1 | 5745.02 | 20000  | 3.48  | 25 | Pass |
| 20C 120V  | ac20 | 5745 | Ant1 | 5745.02 | 20000  | 3.48  | 25 | Pass |
| 20C 138V  | ac20 | 5745 | Ant1 | 5745    | 0      | 0     | 25 | Pass |
| -20C 120V | ac20 | 5745 | Ant1 | 5744.96 | -40000 | -6.96 | 25 | Pass |
| -10C 120V | ac20 | 5745 | Ant1 | 5744.98 | -20000 | -3.48 | 25 | Pass |
| 0C 120V   | ac20 | 5745 | Ant1 | 5744.96 | -40000 | -6.96 | 25 | Pass |
| 10C 120V  | ac20 | 5745 | Ant1 | 5745.02 | 20000  | 3.48  | 25 | Pass |
| 30C 120V  | ac20 | 5745 | Ant1 | 5745    | 0      | 0     | 25 | Pass |
| 40C 120V  | ac20 | 5745 | Ant1 | 5744.98 | -20000 | -3.48 | 25 | Pass |
| 50C 120V  | ac20 | 5745 | Ant1 | 5744.98 | -20000 | -3.48 | 25 | Pass |
| 20C 102V  | ac20 | 5825 | Ant1 | 5824.98 | -20000 | -3.43 | 25 | Pass |
| 20C 120V  | ac20 | 5825 | Ant1 | 5824.98 | -20000 | -3.43 | 25 | Pass |
| 20C 138V  | ac20 | 5825 | Ant1 | 5824.98 | -20000 | -3.43 | 25 | Pass |
| -20C 120V | ac20 | 5825 | Ant1 | 5824.98 | -20000 | -3.43 | 25 | Pass |
| -10C 120V | ac20 | 5825 | Ant1 | 5824.98 | -20000 | -3.43 | 25 | Pass |
| 0C 120V   | ac20 | 5825 | Ant1 | 5824.98 | -20000 | -3.43 | 25 | Pass |
| 10C 120V  | ac20 | 5825 | Ant1 | 5824.98 | -20000 | -3.43 | 25 | Pass |
| 30C 120V  | ac20 | 5825 | Ant1 | 5824.98 | -20000 | -3.43 | 25 | Pass |
| 40C 120V  | ac20 | 5825 | Ant1 | 5824.98 | -20000 | -3.43 | 25 | Pass |
| 50C 120V  | ac20 | 5825 | Ant1 | 5825    | 0      | 0     | 25 | Pass |
| 20C 102V  | ac40 | 5190 | Ant1 | 5190    | 0      | 0     | 25 | Pass |
| 20C 120V  | ac40 | 5190 | Ant1 | 5190    | 0      | 0     | 25 | Pass |
| 20C 138V  | ac40 | 5190 | Ant1 | 5190.04 | 40000  | 7.71  | 25 | Pass |

|           |      |      |      |         |        |       |    |      |
|-----------|------|------|------|---------|--------|-------|----|------|
| -20C 120V | ac40 | 5190 | Ant1 | 5189.96 | -40000 | -7.71 | 25 | Pass |
| -10C 120V | ac40 | 5190 | Ant1 | 5190    | 0      | 0     | 25 | Pass |
| 0C 120V   | ac40 | 5190 | Ant1 | 5190    | 0      | 0     | 25 | Pass |
| 10C 120V  | ac40 | 5190 | Ant1 | 5190.04 | 40000  | 7.71  | 25 | Pass |
| 30C 120V  | ac40 | 5190 | Ant1 | 5189.96 | -40000 | -7.71 | 25 | Pass |
| 40C 120V  | ac40 | 5190 | Ant1 | 5190    | 0      | 0     | 25 | Pass |
| 50C 120V  | ac40 | 5190 | Ant1 | 5190.04 | 40000  | 7.71  | 25 | Pass |
| 20C 102V  | ac40 | 5230 | Ant1 | 5229.96 | -40000 | -7.65 | 25 | Pass |
| 20C 120V  | ac40 | 5230 | Ant1 | 5230    | 0      | 0     | 25 | Pass |
| 20C 138V  | ac40 | 5230 | Ant1 | 5230    | 0      | 0     | 25 | Pass |
| -20C 120V | ac40 | 5230 | Ant1 | 5230    | 0      | 0     | 25 | Pass |
| -10C 120V | ac40 | 5230 | Ant1 | 5229.96 | -40000 | -7.65 | 25 | Pass |
| 0C 120V   | ac40 | 5230 | Ant1 | 5229.96 | -40000 | -7.65 | 25 | Pass |
| 10C 120V  | ac40 | 5230 | Ant1 | 5229.96 | -40000 | -7.65 | 25 | Pass |
| 30C 120V  | ac40 | 5230 | Ant1 | 5229.96 | -40000 | -7.65 | 25 | Pass |
| 40C 120V  | ac40 | 5230 | Ant1 | 5229.96 | -40000 | -7.65 | 25 | Pass |
| 50C 120V  | ac40 | 5230 | Ant1 | 5229.96 | -40000 | -7.65 | 25 | Pass |
| 20C 102V  | ac40 | 5755 | Ant1 | 5755    | 0      | 0     | 25 | Pass |
| 20C 120V  | ac40 | 5755 | Ant1 | 5755    | 0      | 0     | 25 | Pass |
| 20C 138V  | ac40 | 5755 | Ant1 | 5754.96 | -40000 | -6.95 | 25 | Pass |
| -20C 120V | ac40 | 5755 | Ant1 | 5754.96 | -40000 | -6.95 | 25 | Pass |
| -10C 120V | ac40 | 5755 | Ant1 | 5754.96 | -40000 | -6.95 | 25 | Pass |
| 0C 120V   | ac40 | 5755 | Ant1 | 5755.04 | 40000  | 6.95  | 25 | Pass |
| 10C 120V  | ac40 | 5755 | Ant1 | 5754.96 | -40000 | -6.95 | 25 | Pass |
| 30C 120V  | ac40 | 5755 | Ant1 | 5754.96 | -40000 | -6.95 | 25 | Pass |
| 40C 120V  | ac40 | 5755 | Ant1 | 5755    | 0      | 0     | 25 | Pass |
| 50C 120V  | ac40 | 5755 | Ant1 | 5755    | 0      | 0     | 25 | Pass |
| 20C 102V  | ac40 | 5795 | Ant1 | 5795    | 0      | 0     | 25 | Pass |
| 20C 120V  | ac40 | 5795 | Ant1 | 5795    | 0      | 0     | 25 | Pass |
| 20C 138V  | ac40 | 5795 | Ant1 | 5795    | 0      | 0     | 25 | Pass |
| -20C 120V | ac40 | 5795 | Ant1 | 5795    | 0      | 0     | 25 | Pass |
| -10C 120V | ac40 | 5795 | Ant1 | 5794.96 | -40000 | -6.9  | 25 | Pass |
| 0C 120V   | ac40 | 5795 | Ant1 | 5795    | 0      | 0     | 25 | Pass |
| 10C 120V  | ac40 | 5795 | Ant1 | 5795    | 0      | 0     | 25 | Pass |
| 30C 120V  | ac40 | 5795 | Ant1 | 5795    | 0      | 0     | 25 | Pass |
| 40C 120V  | ac40 | 5795 | Ant1 | 5795    | 0      | 0     | 25 | Pass |
| 50C 120V  | ac40 | 5795 | Ant1 | 5795    | 0      | 0     | 25 | Pass |
| 20C 102V  | ac80 | 5210 | Ant1 | 5210    | 0      | 0     | 25 | Pass |
| 20C 120V  | ac80 | 5210 | Ant1 | 5210    | 0      | 0     | 25 | Pass |
| 20C 138V  | ac80 | 5210 | Ant1 | 5210    | 0      | 0     | 25 | Pass |
| -20C 120V | ac80 | 5210 | Ant1 | 5210    | 0      | 0     | 25 | Pass |
| -10C 120V | ac80 | 5210 | Ant1 | 5210    | 0      | 0     | 25 | Pass |


|           |      |      |      |      |   |   |    |      |
|-----------|------|------|------|------|---|---|----|------|
| 0C 120V   | ac80 | 5210 | Ant1 | 5210 | 0 | 0 | 25 | Pass |
| 10C 120V  | ac80 | 5210 | Ant1 | 5210 | 0 | 0 | 25 | Pass |
| 30C 120V  | ac80 | 5210 | Ant1 | 5210 | 0 | 0 | 25 | Pass |
| 40C 120V  | ac80 | 5210 | Ant1 | 5210 | 0 | 0 | 25 | Pass |
| 50C 120V  | ac80 | 5210 | Ant1 | 5210 | 0 | 0 | 25 | Pass |
| 20C 102V  | ac80 | 5775 | Ant1 | 5775 | 0 | 0 | 25 | Pass |
| 20C 120V  | ac80 | 5775 | Ant1 | 5775 | 0 | 0 | 25 | Pass |
| 20C 138V  | ac80 | 5775 | Ant1 | 5775 | 0 | 0 | 25 | Pass |
| -20C 120V | ac80 | 5775 | Ant1 | 5775 | 0 | 0 | 25 | Pass |
| -10C 120V | ac80 | 5775 | Ant1 | 5775 | 0 | 0 | 25 | Pass |
| 0C 120V   | ac80 | 5775 | Ant1 | 5775 | 0 | 0 | 25 | Pass |
| 10C 120V  | ac80 | 5775 | Ant1 | 5775 | 0 | 0 | 25 | Pass |
| 30C 120V  | ac80 | 5775 | Ant1 | 5775 | 0 | 0 | 25 | Pass |
| 40C 120V  | ac80 | 5775 | Ant1 | 5775 | 0 | 0 | 25 | Pass |
| 50C 120V  | ac80 | 5775 | Ant1 | 5775 | 0 | 0 | 25 | Pass |

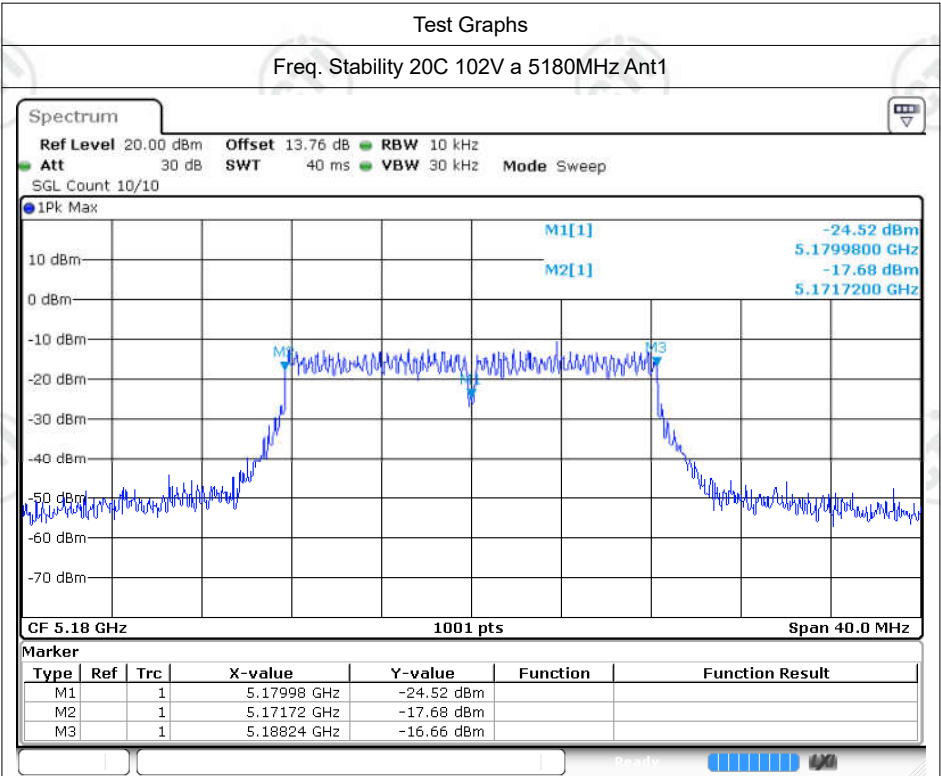


Date: 19.OCT.2023 13:26:21

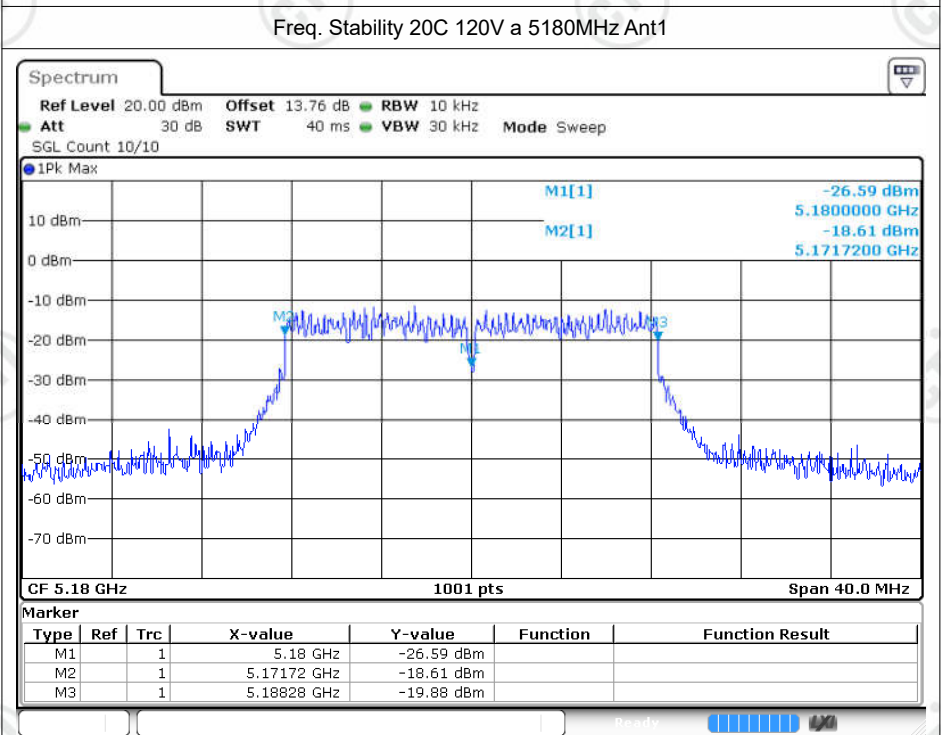


Date: 19.OCT.2023 13:26:42

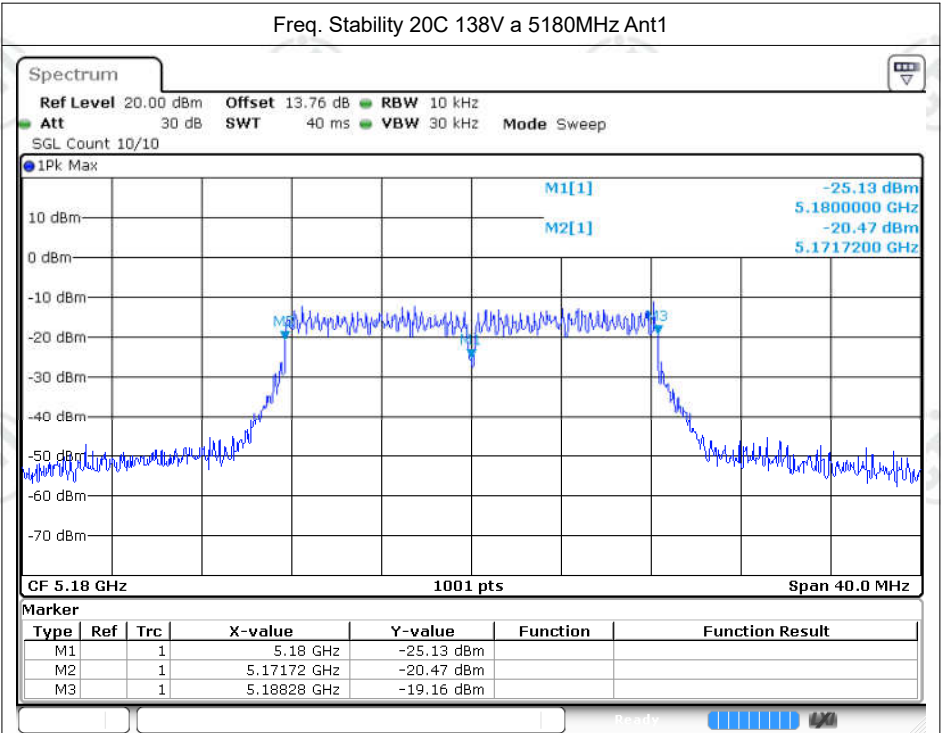


Date: 19.OCT.2023 13:26:27

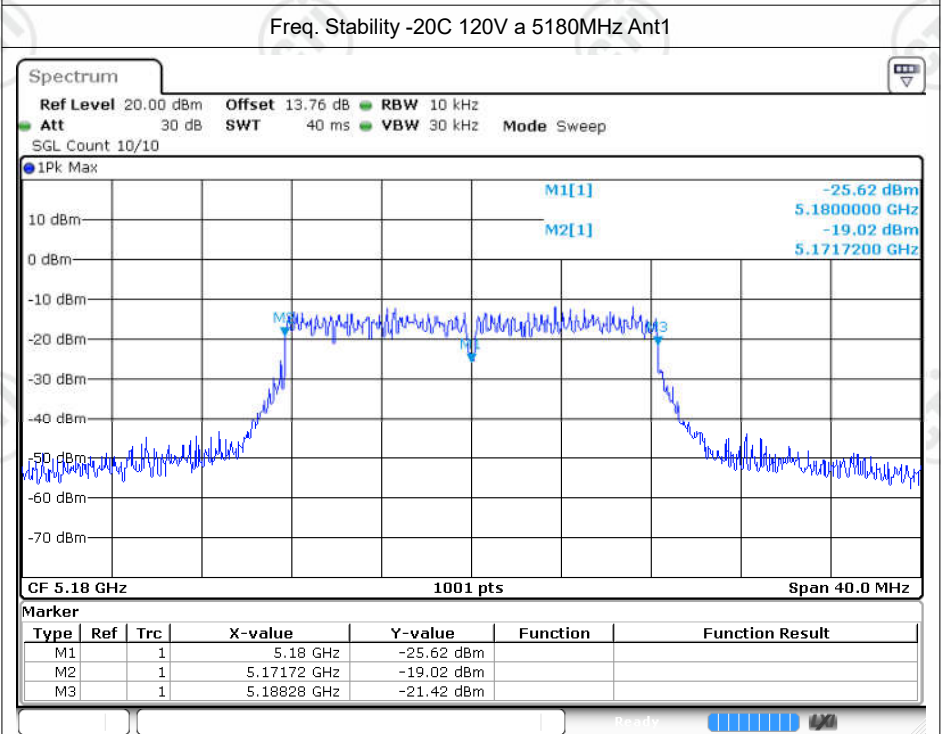


Date: 19.OCT.2023 13:26:30

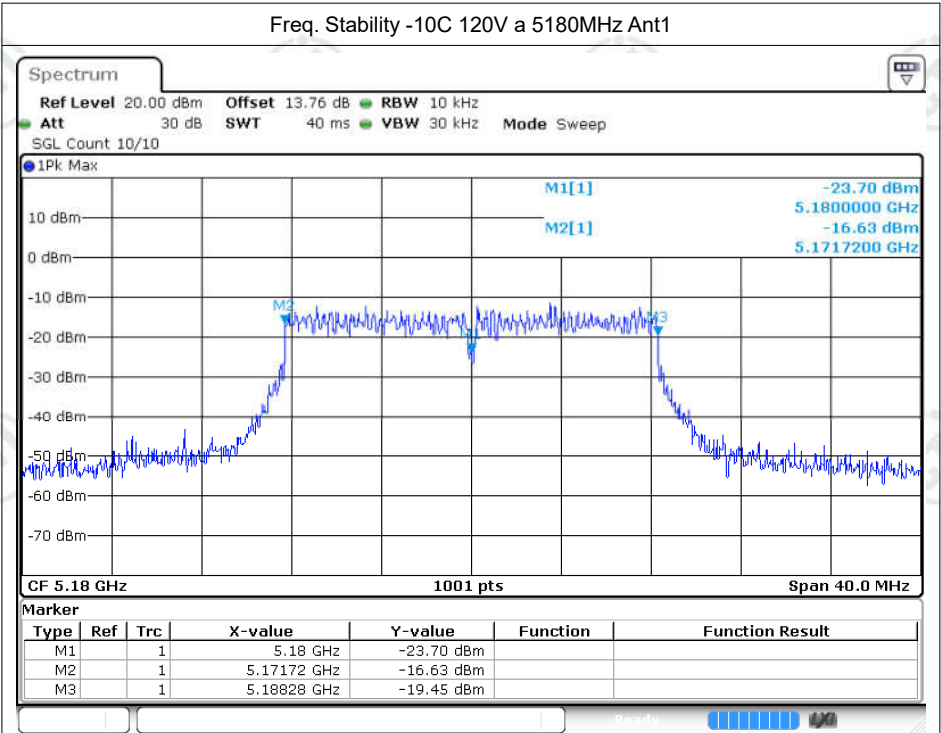


Date: 19.OCT.2023 13:26:33

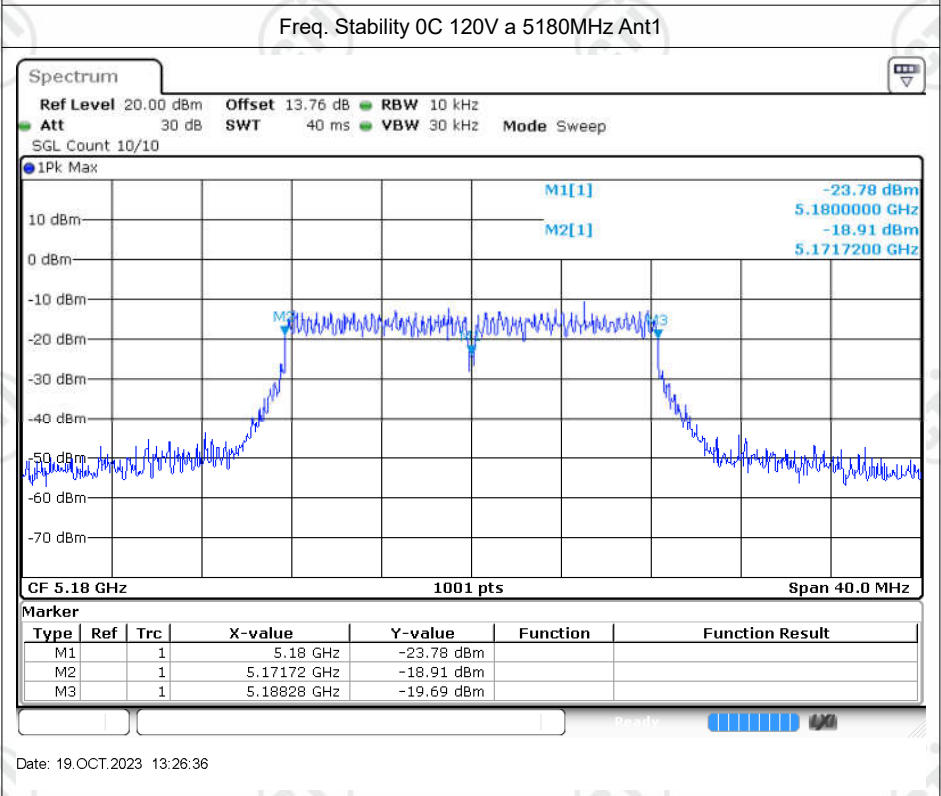


Date: 19.OCT.2023 13:26:36

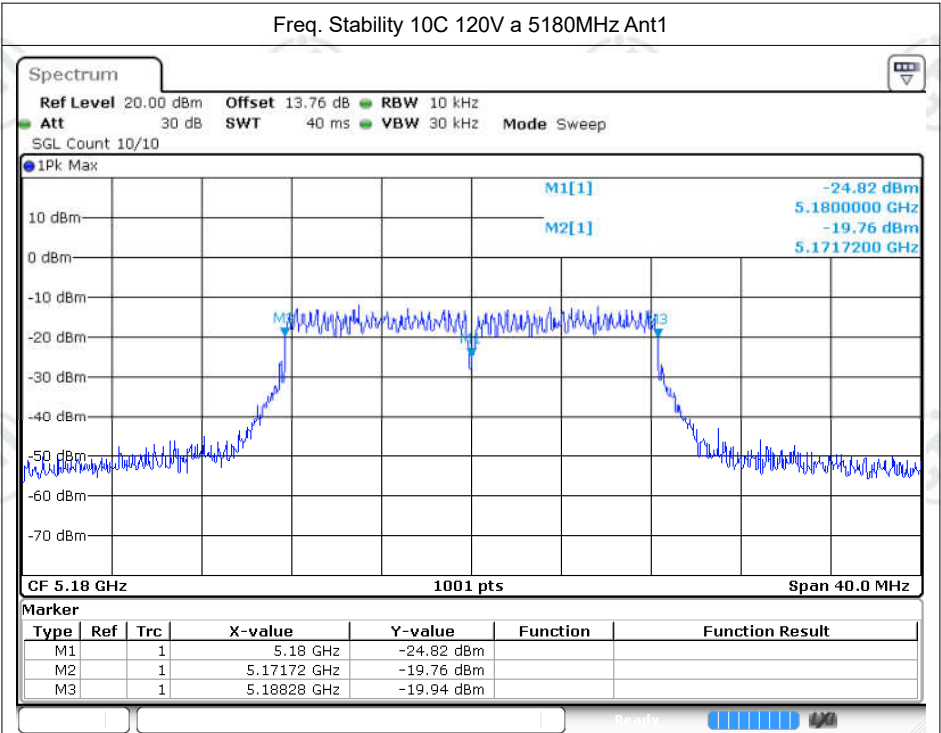


Date: 19.OCT.2023 13:26:39

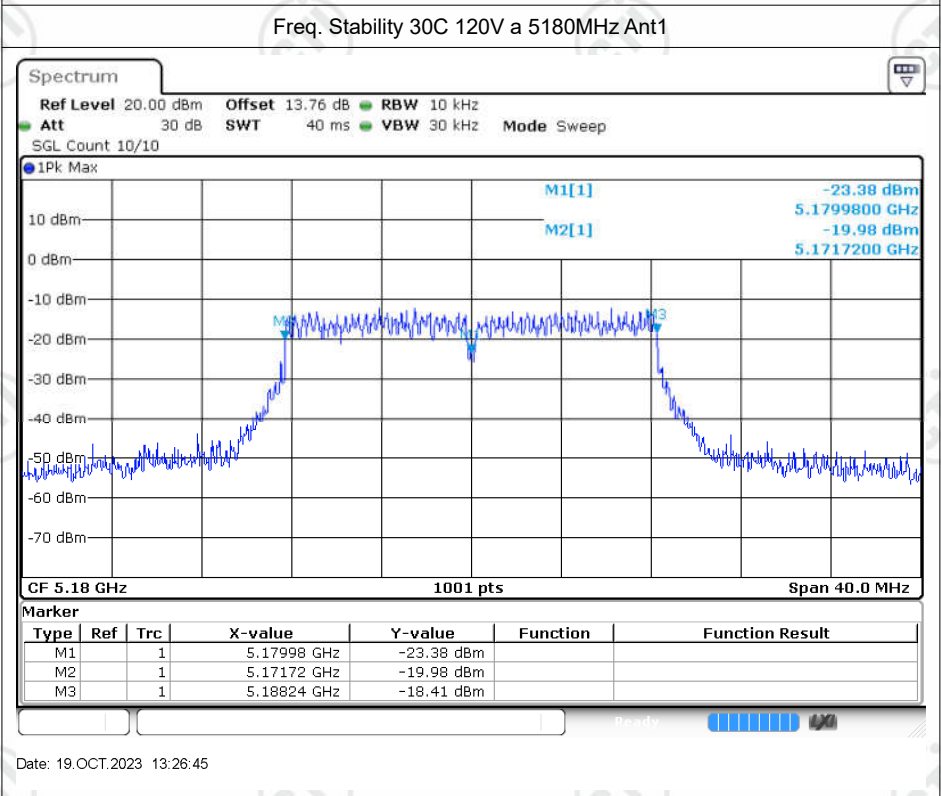


Date: 19.OCT.2023 13:26:45

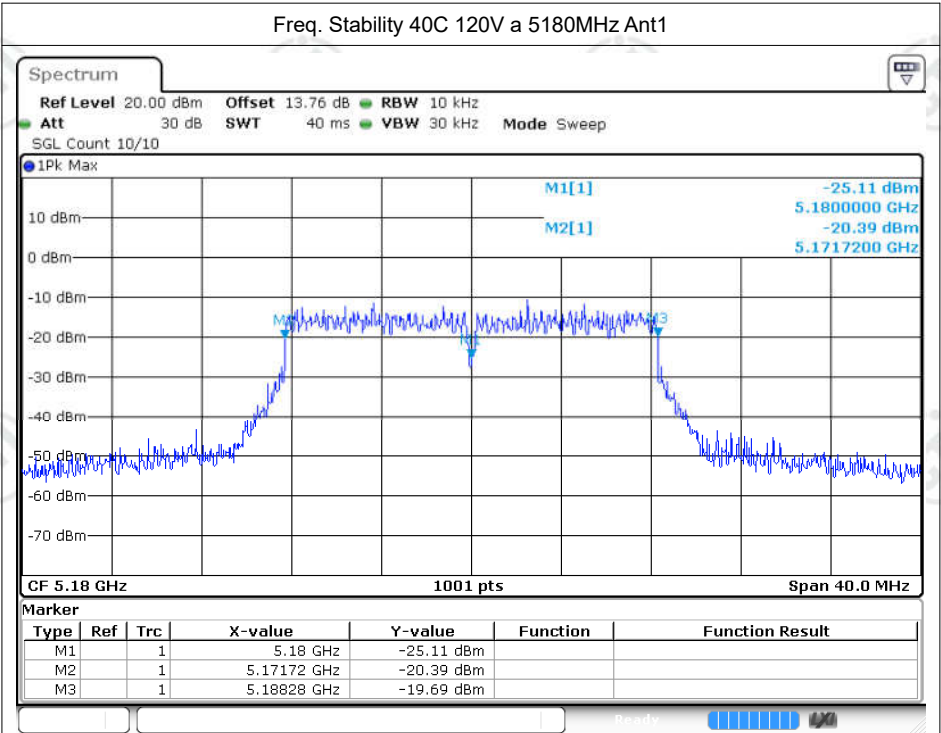


Date: 19.OCT.2023 13:26:48

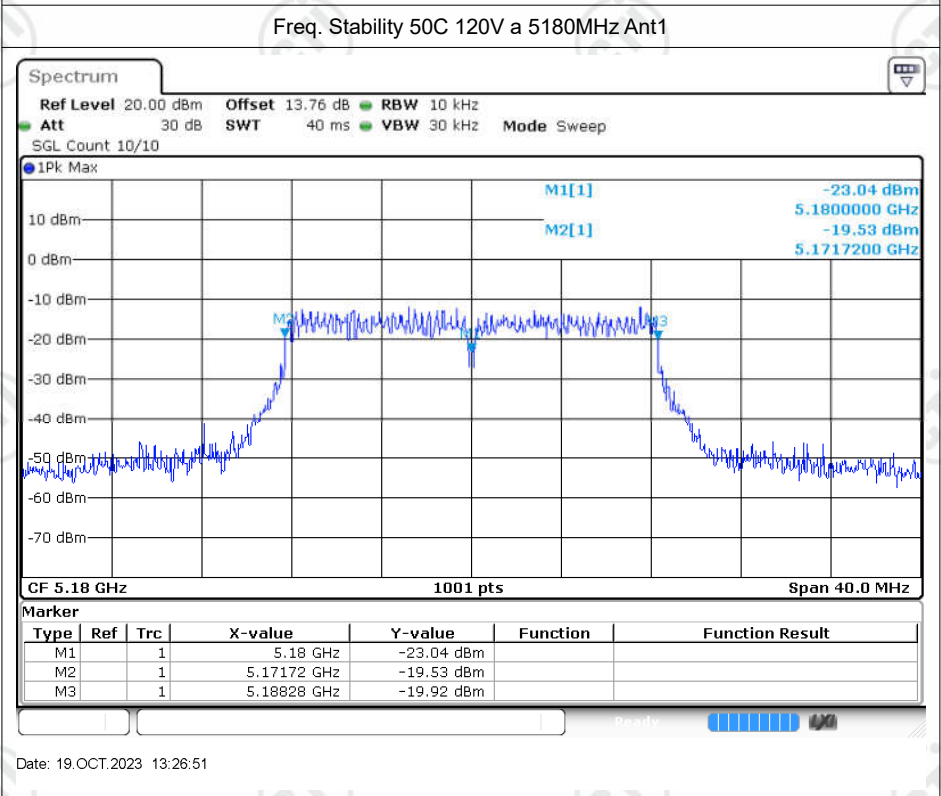


Date: 19.OCT.2023 13:26:51

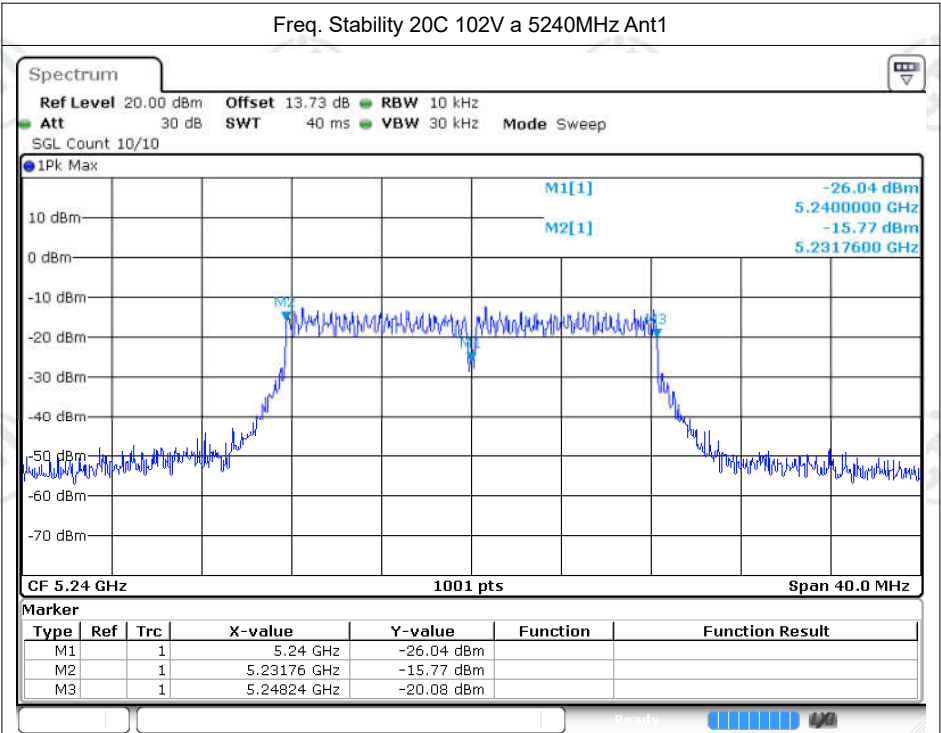


Date: 19.OCT.2023 13:30:03

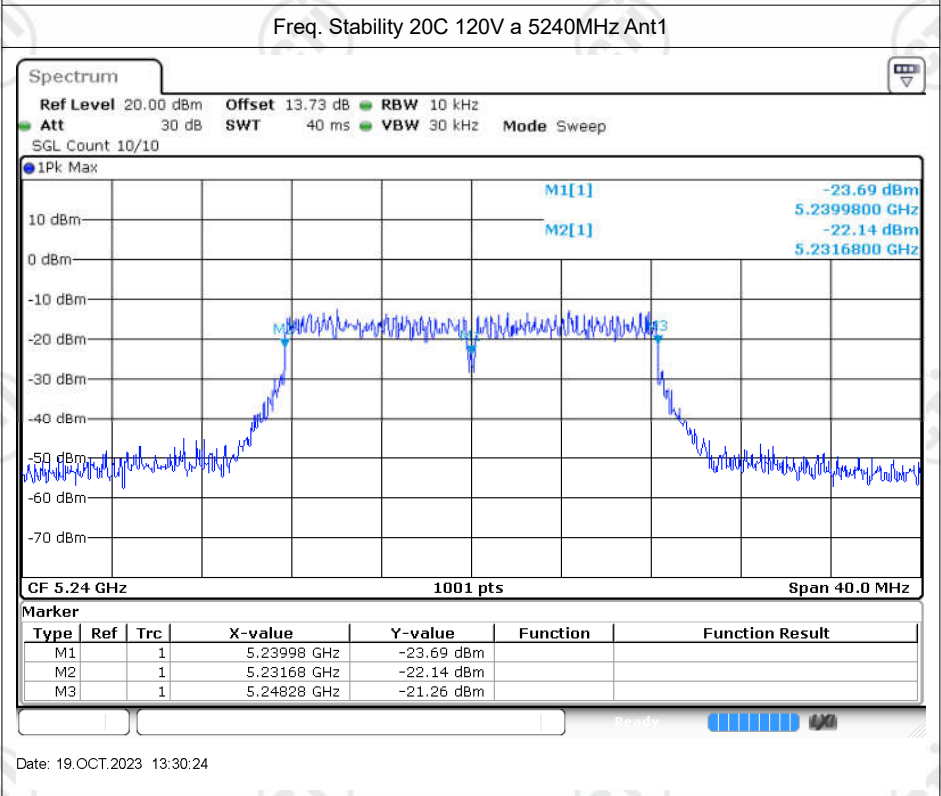


Date: 19.OCT.2023 13:30:24

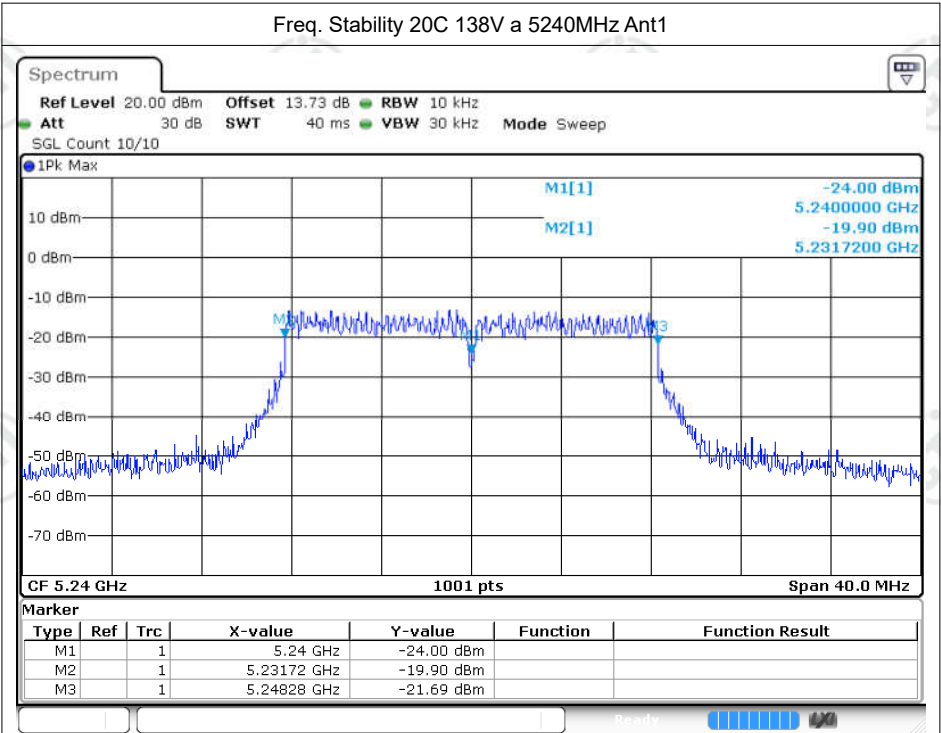


Date: 19.OCT.2023 13:30:09

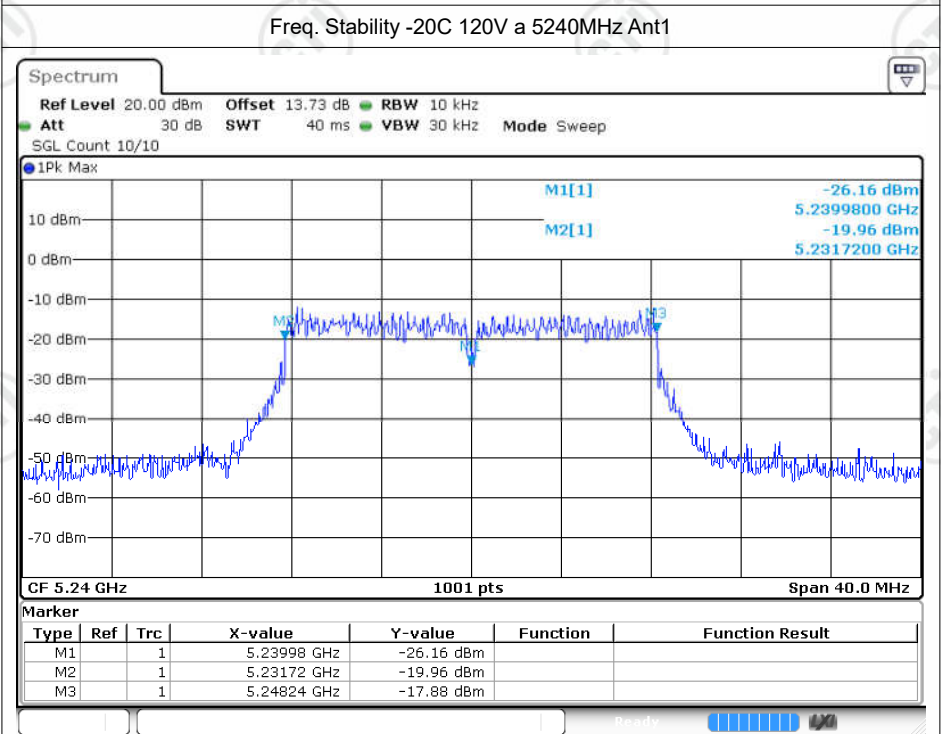


Date: 19.OCT.2023 13:30:12

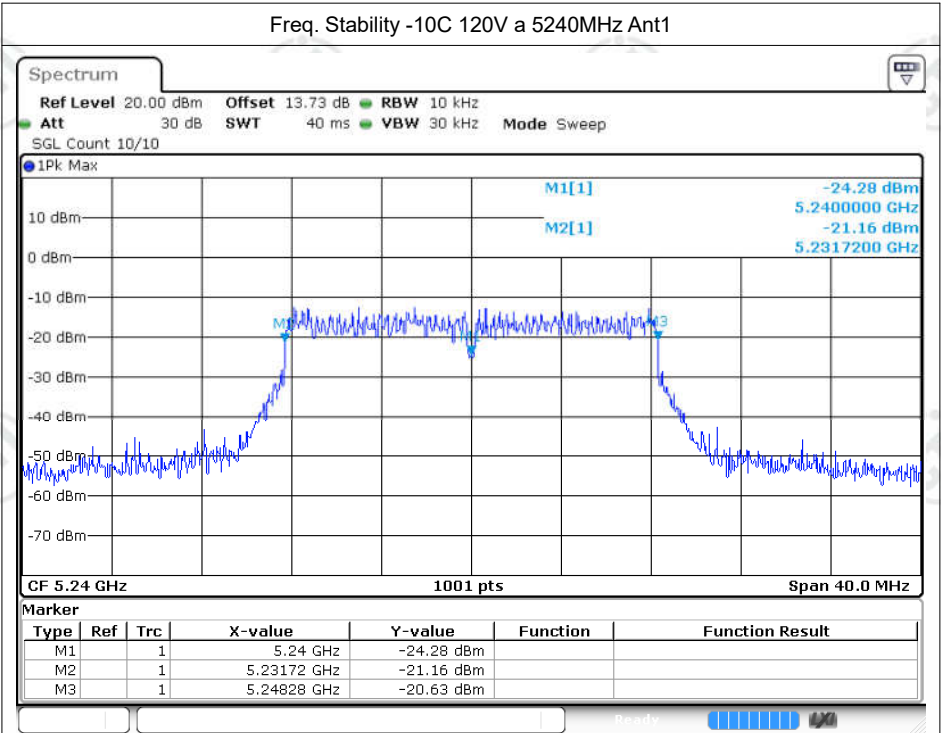


Date: 19.OCT.2023 13:30:15

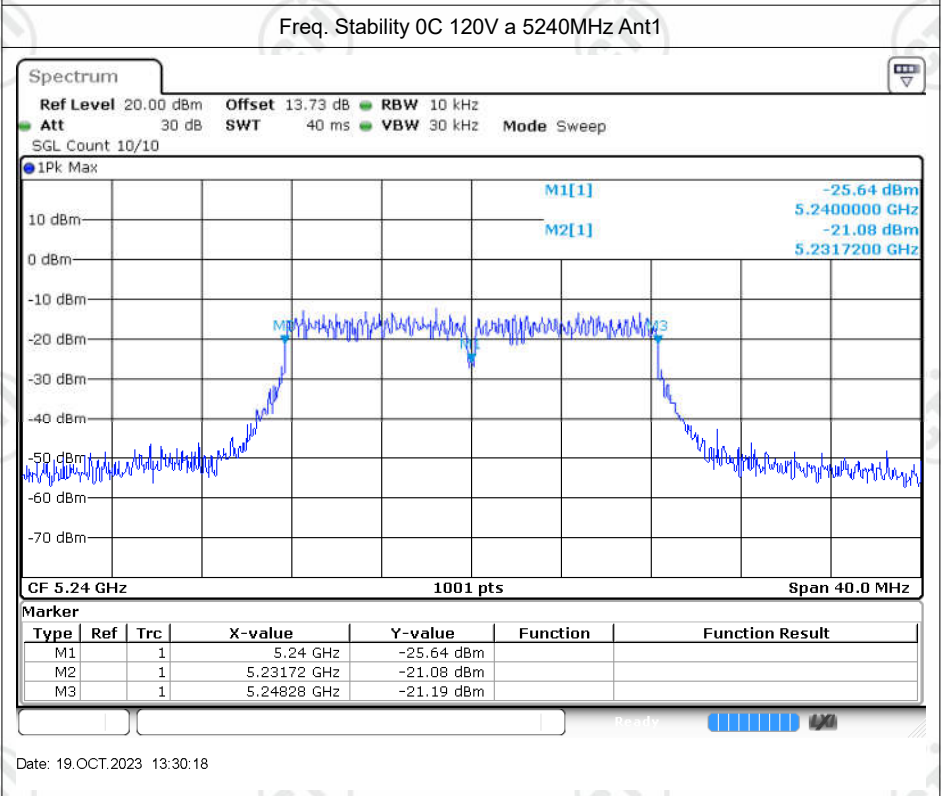


Date: 19.OCT.2023 13:30:18

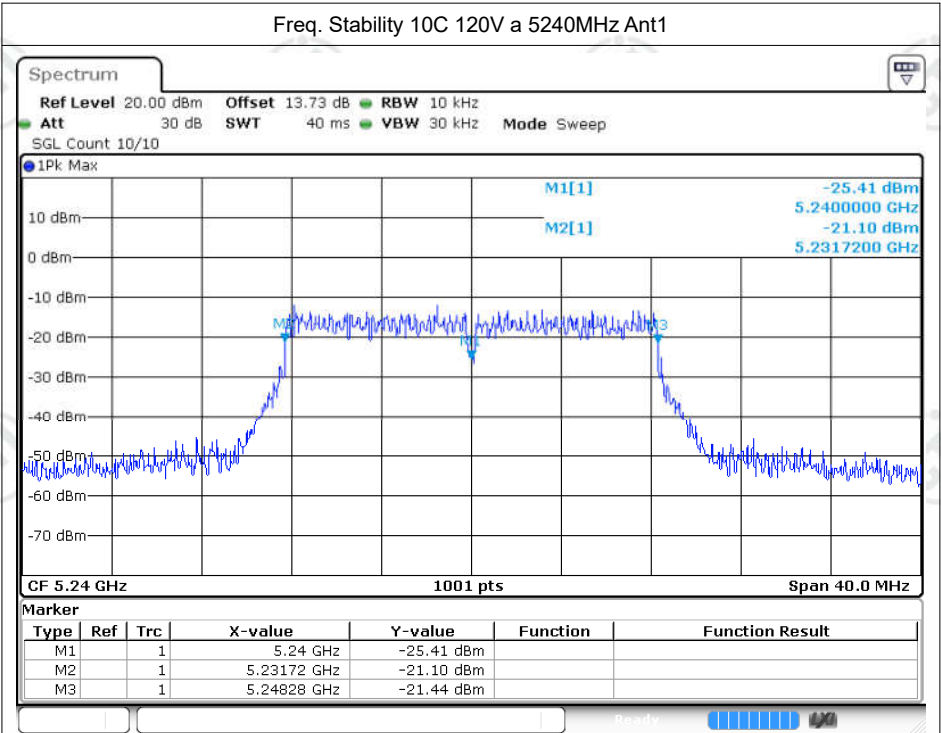


Date: 19.OCT.2023 13:30:21

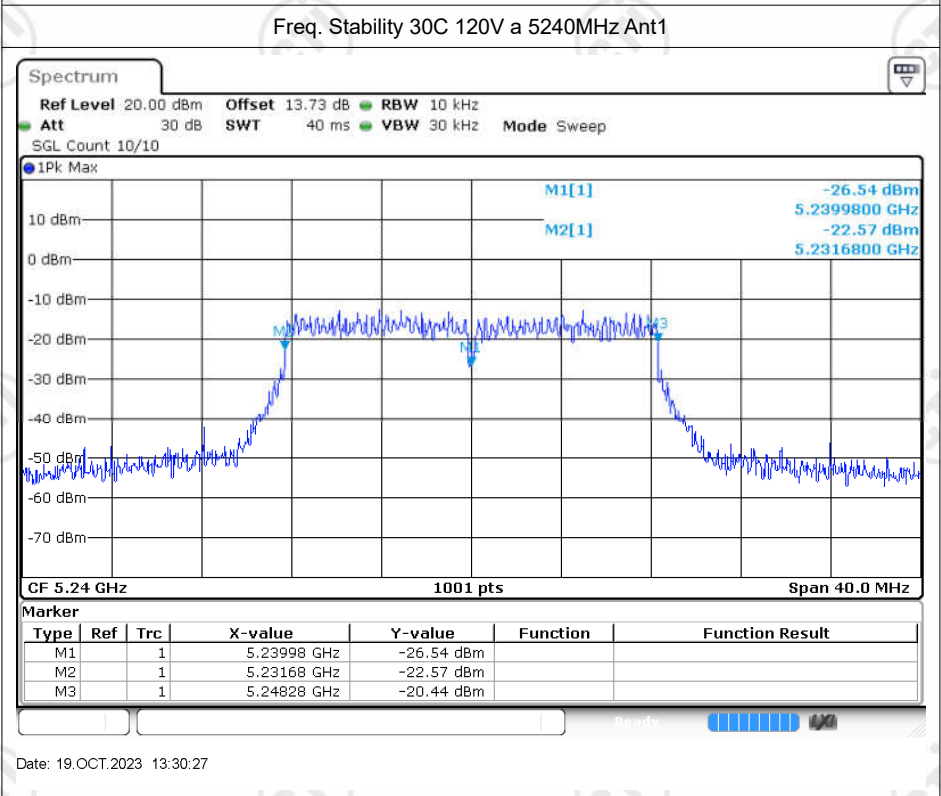


Date: 19.OCT.2023 13:30:27

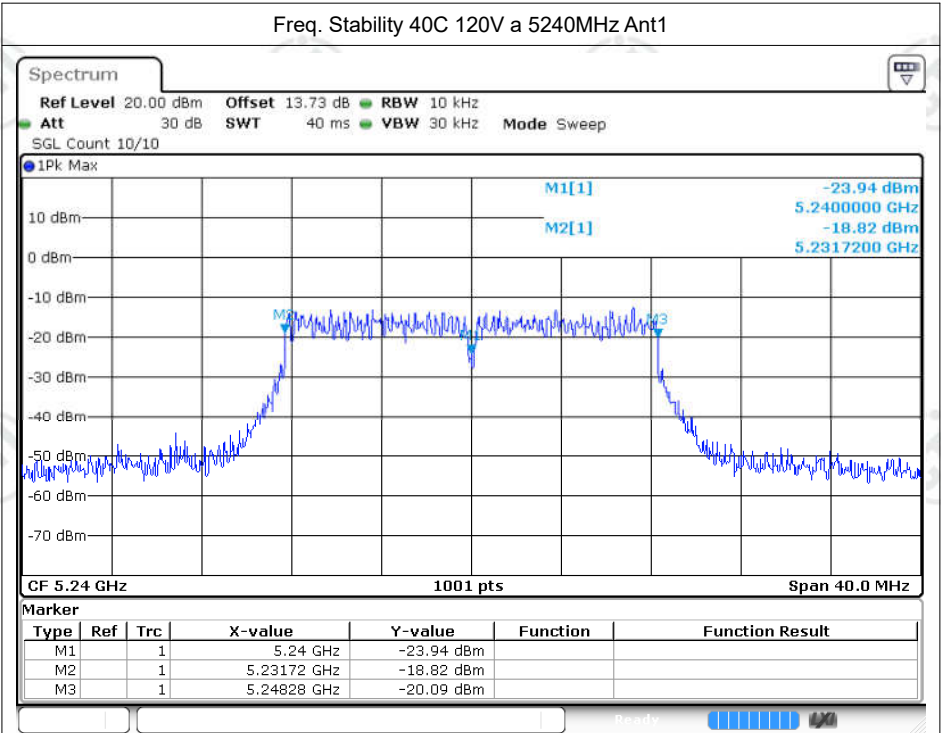


Date: 19.OCT.2023 13:30:30

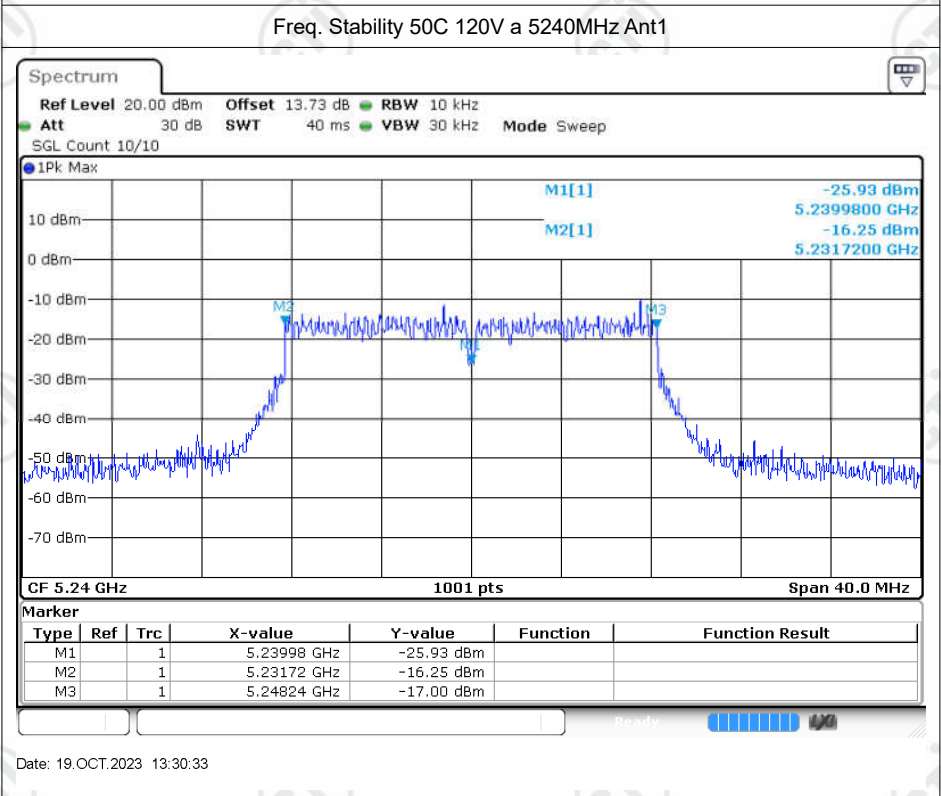

Date: 19.OCT.2023 13:30:33

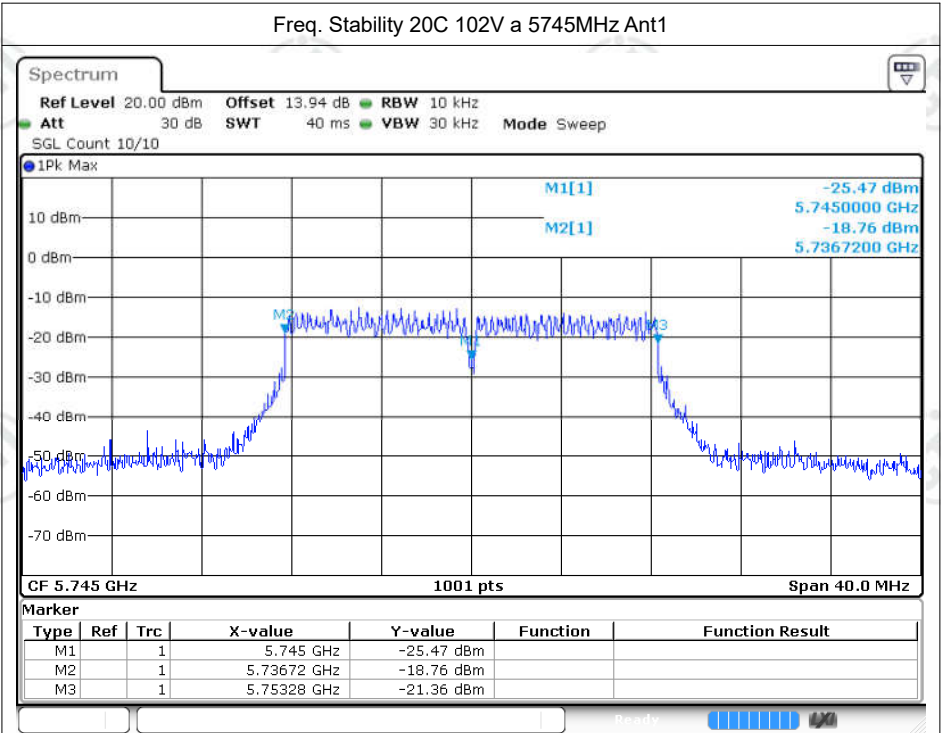

Date: 19.OCT.2023 13:32:53

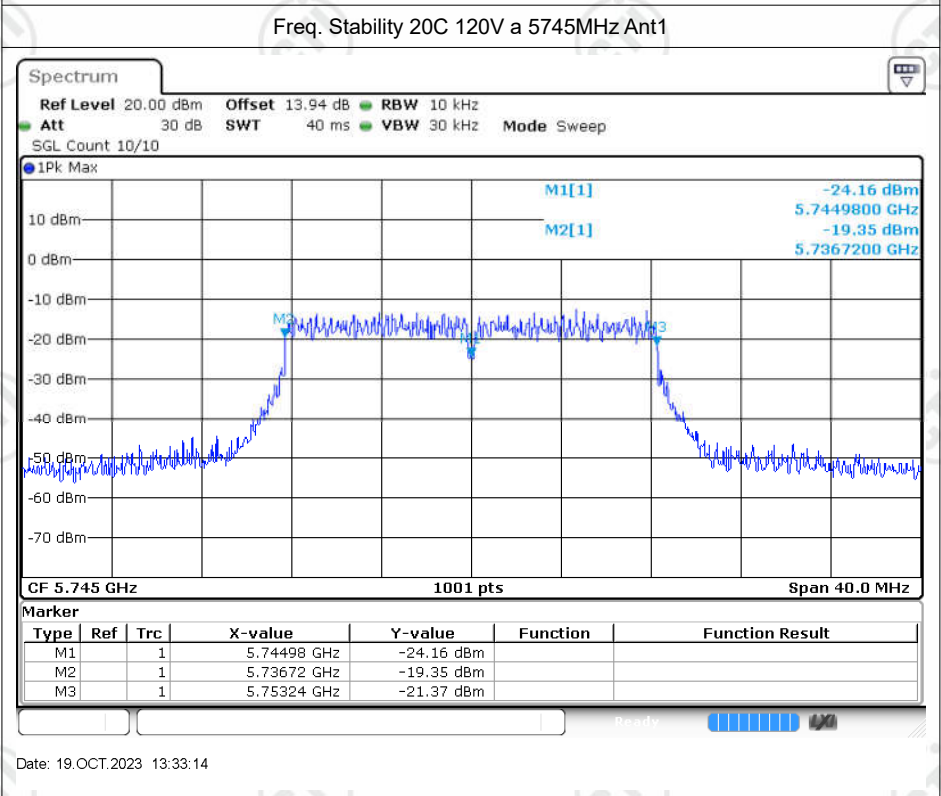

Date: 19.OCT.2023 13:33:14