

PRODUCT SPECIFICATIONS

Project Name _____ Date _____



Type or Model _____ Qty _____

VOLT® Low Voltage Landscape Lighting

VOLT® 3.5W RGBCW G4 LED Bi-Pin, Model: ZGU4-20-RGBCWX-R#


PRODUCT DESCRIPTION

Introducing the first ever VOLT® RGBCW LED G4 bi-pin bulb – our first replaceable color-changing LED bulb. Effortlessly choose from a wide spectrum of colors, adjust the brightness, control the color temperature (warm 2200K to crisp, bright 4000K), or set up to 6 zones all through the RF remote (sold separately).

With omnidirectional lighting, the RGBCW G4 bulb adds even and effective, colorful illumination to any landscape setting. Due to their size and omnidirectional light distribution, the G4 Bi-Pin bulbs are only compatible with our 12" and 24" classic path lights.



PRODUCT DIMENSIONS

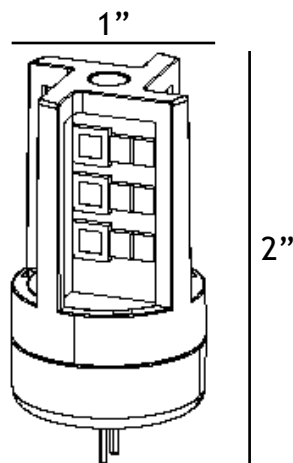

SPECIFICATIONS

- **Input Voltage:** 11-18V, 50/60Hz AC- Will operate from 6-18V with decreased lumen output below 11V.
- **Beam Angles:** Omni-Directional
- **Correlated Color Temperature (CCT):** 2200K, 2700K, 3000K, 4000K
- **Color Rendering Index (CRI):** > 80
- **Operating Voltage:** 12VAC
- **Powered by:** VOLT's Low Voltage Transformer
- **Watts:** 3.5W
- **Lumens:** 260 at 2200K | 300 at 4000K | 30 at Red | 95 at Green | 20 at Blue

FEATURES & BENEFITS

- Replacements for 20W Halogen Bi-Pins
- Omni Directional beam angles
- **Requires VOLT® RF Remote Control (sold separately) for usage. One remote controls all VOLT® RGBCW bulbs.**
- **Only compatible with our 12" and 24" Classic Path Lights.**
- RGB + Cool White to Warm White

WARRANTY

Residential: Lifetime Warranty
Commercial: 10-Year Warranty

INSTALLATION INSTRUCTIONS

IMPORTANT FCC INSTRUCTIONS AND WARNINGS

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning : Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference,
- and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Statement:

This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.