

SPECIFICATION

Product Name: Lighting Control Switch

Model No.: MC609V RC A

Issue Date: March 28, 2018

CUSTOMER APPROVED

PRODUCT DIRECTOR APPROVED	SALES CHECKED	R&D CHECKED	PREPARED

1. Features

Shenzhen Merrytek Technology Co.,Ltd

Add: 2nd and 3rd floor, NO.3 Building, 380 Xiangshan Avenue, Luotian, Yanluo, Baoan, Shenzhen, 518127,China

Tel: +86 (0)755-2305 7253

Fax: +86 (0)755-2786 3012

Website: www.merrytek.com

- Operating voltage 120/277/347V AC, suitable to North American market.
- Patented microwave antenna, mounting height is 15m Max, suitable to install in most of warehouses.
- Work with 1-10V dimmable LED driver, easy to achieve 2-step or 3-step dimming function.
- Work with remote controller MH01, easy to adjust sensor parameters.

2. Parameter

Input	Operating Voltage Range	108-381V AC, 50Hz/60Hz
	DC Input Voltage	N/A
	Rated Voltage	120/277/347Vac, 50/60Hz
	No-load Power	N/A
	Stand-by Power	<1.5W
	Surge Test	L--N: 2kV
Output	Working Mode	ON/OFF function, 1-10V step dimming
	Type of Load	Inductive or Resistive Load
	Load Capacity	120VAC: 3.6A; 277VAC: 3.4A; 347VAC: 3.3A
	Current of Load	N/A
	Max. Surge Capacity	50A (50% I _{peak} , t _{width} =500uS, 277Vac full load, cold start); 80A (50% I _{peak} , t _{width} =200uS, 277Vac, full load, cold start)
Dim Interface	1-10V Dimming	< 50mA (Non-constant source) 10%(1.4-1.6V), 20%(1.9-2.1V), 30%(2.9-3.1V), 50% (4.9-5.1V)
	Synchronous Control	N/A
	High Low-level	N/A
	PWM Control	N/A
Sensor Parameters	Operating Frequency	5.8 GHz ±75 MHz , ISM Band.
	Transmitting power	0.5mW Max.
	Hold time	DIP switch: 5s/30s/1min/3min/20min/30min Remote control: 5s/30s/1min/3min/5min/10min/20min/30min
	Stand-by DIM Level	DIP switch & Remote control: 10%/20%/30%/50%
	Stand-by Period	DIP switch: 0s/1min/3min/10min/30min/+∞ Remote control: 0s/10s/1min/3min/5min/10min/30min/+∞
	Detection Area	DIP switch: 100%/50% Remote control: 25%/50%/75%/100%
	Daylight Sensor	DIP switch & Remote control: 5lux/15lux/30lux/50lux/100lux/150lux/Disable (Ambient light diffusion)
	Daylight on/off	N/A
	Detecting Radius	5-8m (mounting height 8m) See note 2

Shenzhen Merrytek Technology Co.,Ltd

Add: 2nd and 3rd floor, NO.3 Building, 380 Xiangshan Avenue, Luotian, Yanluo, Baoan, Shenzhen, 518127,China

Tel: +86 (0)755-2305 7253


Fax: +86 (0)755-2786 3012

Website: www.merrytek.com


	Mounting Height	15m Max
	Detecting Angle	150°(wall mounting) 360°(ceiling mounting)
Wireless Module	Operating Frequency	N/A
	Transmitting power	N/A
	Transmitting distance	N/A
	Modulation mode	N/A
	Number of coding	N/A
Operating Environment	Operating Temperature	-35 °C...+55°C
	Storage Temperature	Temperature: -40°C...+80°C Humidity: 10%-95% (non-condensing)
Certificate Standards	Safety standards	UL 60730
	EMC standards	FCC PART15
	Environmental Requirement	Compliant to RoHS
	Certificate	cULus
Others	Wiring	Input: STW, 3*18AWG exposed line length: 810-830mm 1-10V DC: SJTW, 2*18AWG exposed line length: 810-830mm
	IP Rating	IP65
	Protection Class	Class II
	Installation	Independent
	Dimension	(ΦxH)72*59mm
	Package	Instruction+ White box+ White box tags+ Clapboard+ Carton(K=A)
	Net Weight	MC609V A: 315g, MC609V C:343g , MC609V D:175g
	Lifetime	50,000h @ Ta Full load
Note 1. "N/A"means not available. 2. Detection area is effected on volume of motion object and motion speed. The detection area is tested by a 165cm height person and walking speed is 0.5m/s.		

3. Function


1) On/OFF Function (stand-by period be set to "0"s)

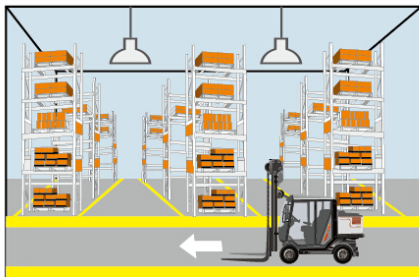

- ① With sufficient ambient light, the light will not be switched on even if with motion signal.

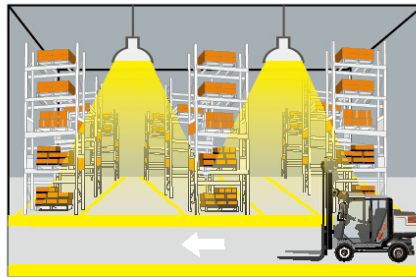


- ② With insufficient ambient light, the sensor switches on the light when motion is detected.

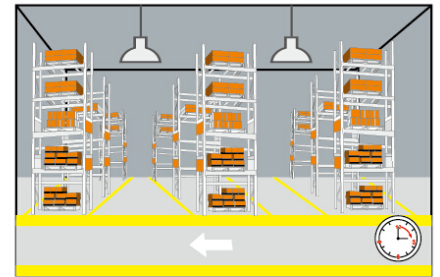


- ③ After elapse of hold time, the sensor switches off the light when no motion is detected.


2) 2-step dimming function (stand-by period be set to "+∞")

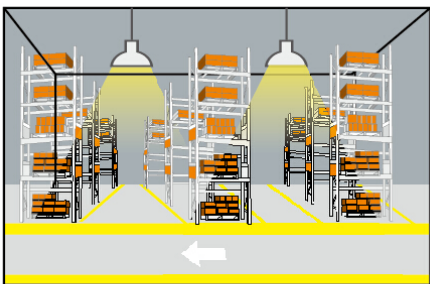

- ① If there is no motion detected, the light will be remained at a low light level all the time.

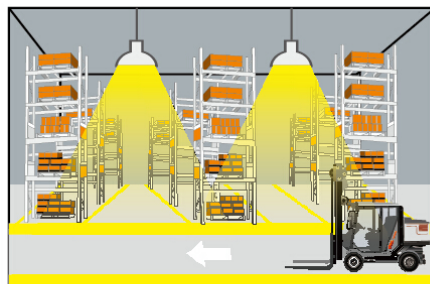


- ② When motion is detected, the sensor will switch on the light to 100% brightness

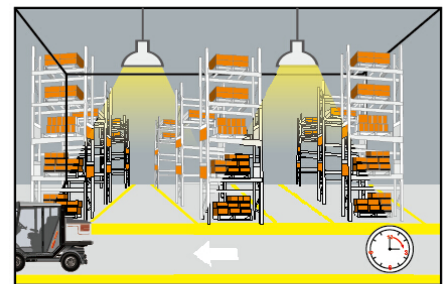


- ③ After elapse of hold time, the sensor dims the light at the present low light level if no motion is detected.


3) 3-step dimming function (stand-by period be set to "10s/1min/3min/5min/10min/30min")




- ① With sufficient ambient light, the light will not be switched on even if with motion signal.



- ② With insufficient ambient light, the sensor switches on the light when motion is detected.



- ③ After elapse of hold time, the sensor dims the light at a low light level if no new motion is detected.



- ④ After elapse of standby period, the sensor switches off the light if no motion is detected in the detection zone.

Shenzhen Merrytek Technology Co.,Ltd

Add: 2nd and 3rd floor, NO.3 Building, 380 Xiangshan Avenue, Luotian, Yanluo, Baoan, Shenzhen, 518127, China


Tel: +86 (0)755-2305 7253

Fax: +86 (0)755-2786 3012


Website: www.merrytek.com

4. Dimension (mm)

1) Bottom hole mounting: MC609V RC A

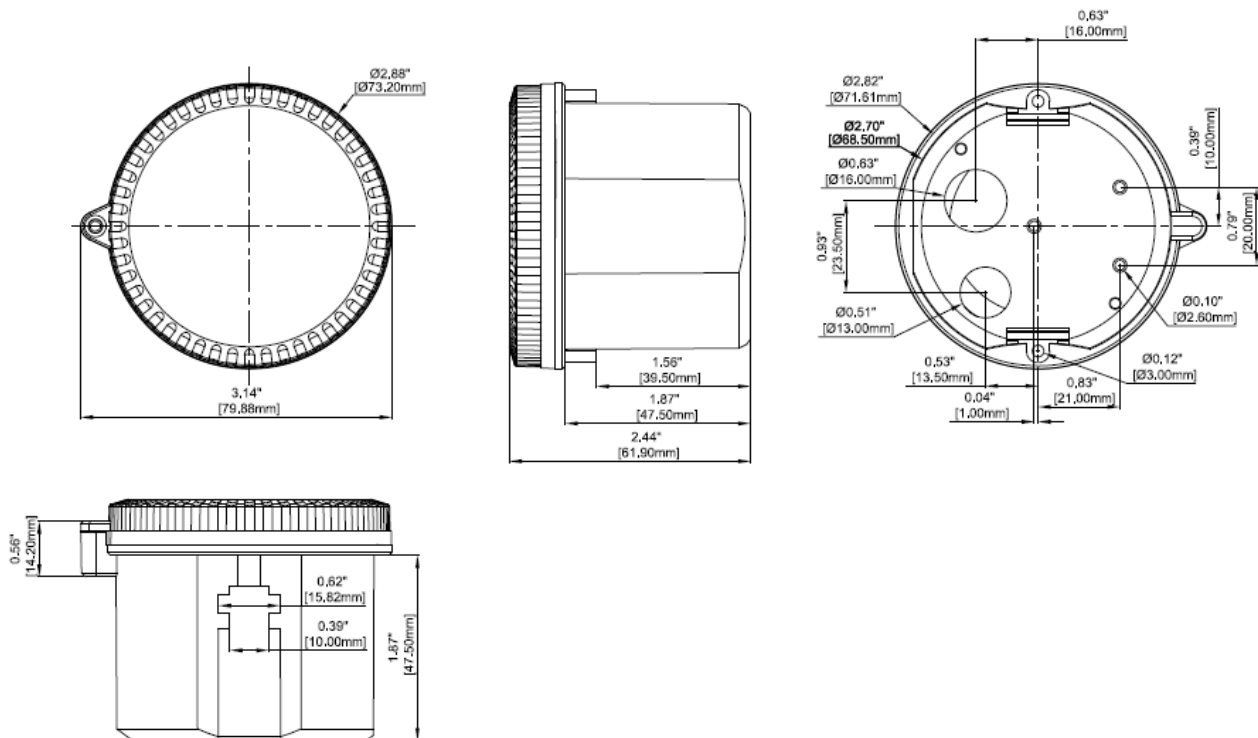


5. Wiring

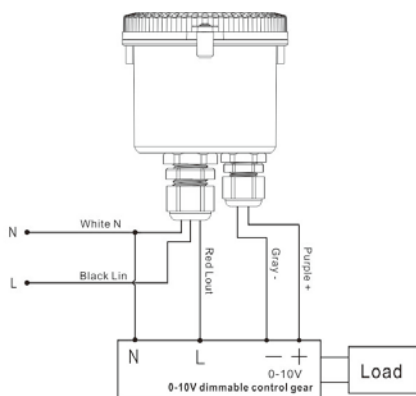

MC609V RC A

*The sensor is designed for connect one load only. Connect more than one loads may damage the sensor.

6. Structure

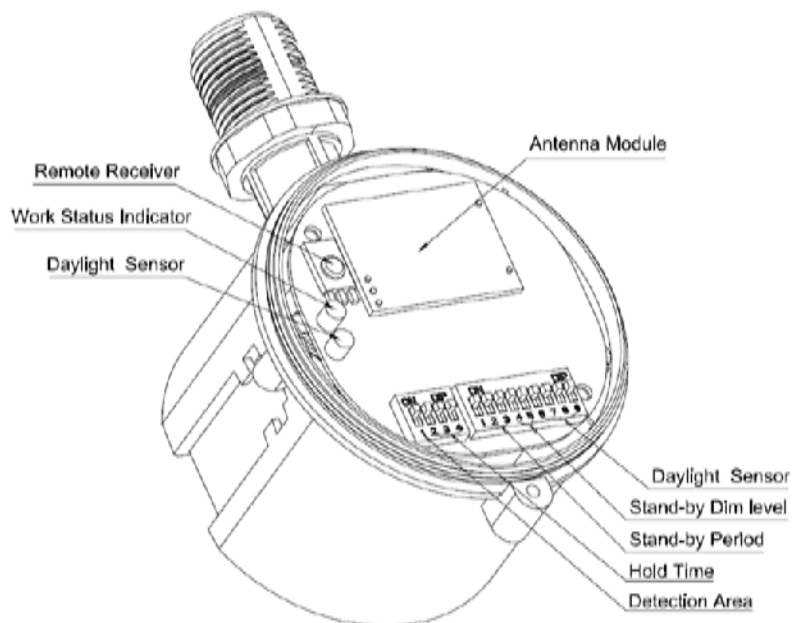

7. Remote Control

Button	Remarks
ON/OFF	Press the "ON/OFF" button, the light goes to constant on or constant off mode, the sensor is disabled. Press "Reset" or "Auto Mode" button to quit from this mode.
Reset	Press "Reset" button, all parameters are the same as the DIP switch setting.
Auto Mode	Press "Auto Mode" button, the sensor starts to work and all parameters setting will remain the same as the previous status before the light is switched on/off.
DIM Test	Press "DIM Test" button to test the dimming function. The sensor will dim automatically and return to the normal work mode.
Test (2s)	The button "Test(2s)" is for factory testing purpose only. The sensor will go in to test mode, Detection sensitivity: 100% Hold time: 2sec stand-by dim level: 10% Stand-by period: 0s Daylight sensor: Disable Test mode can be disabled by pressing any button.

Scene Options	Detection Area	Hold Time	Stand-by period	Stand-by dim level	Daylight Sensor
QS1	100%	30s	1min	10%	5Lux
QS2	100%	1min	3min	10%	10Lux
QS3	100%	5min	10min	10%	30Lux
QS4	100%	10min	30min	10%	Disable

Note: Detection area / Hold time / Stand-by period / Stand-by dim level / Daylight sensor can be adjusted by pressing the corresponding button. The latest setting will stay valid.

The Microwave Sensor's green working light will flash 3 times when the remote control is set successfully.

8. DIP Switch Setting

Detection Area (Sensitivity)

	1	
I	ON	100%
II	-	50%

Hold Time

	2	3	4	
I	ON	ON	ON	5s
II	-	ON	ON	30s
III	ON	-	ON	1min
IV	-	-	ON	3min
V	ON	ON	-	20min
VI	-	-	-	30min

Stand-by Period

	1	2	3	
I	ON	ON	ON	0s
II	-	ON	ON	1min
III	ON	-	ON	3min
IV	-	-	ON	10min
V	ON	ON	-	30min
VI	-	-	-	+∞

Stand-by Dim Level

	4	5	Brightness%	Voltage of 1-10V interface
I	ON	ON	10%	1.4-1.6V
II	ON	-	20%	1.9-2.1V
III	-	ON	30%	2.9-3.1V
IV	-	-	50%	4.9-5.1V

Shenzhen Merrytek Technology Co.,Ltd

Add: 2nd and 3rd floor, NO.3 Building, 380 Xiangshan Avenue, Luotian, Yanluo, Baoan, Shenzhen, 518127,China

Tel: +86 (0)755-2305 7253

Fax: +86 (0)755-2786 3012

Website: www.merrytek.com

Daylight Sensor

	6	7	8	9	
I	ON	ON	ON	ON	5Lux
II	-	ON	ON	ON	15Lux
III	ON	-	ON	ON	30Lux
IV	-	-	ON	ON	50Lux
V	ON	ON	-	ON	100Lux
VI	ON	ON	ON	-	150Lux
VII	-	-	-	-	Disable*

*Disable means the daylight sensor does not work. The sensor will turn on light once motion is detected regardless of ambient light level.

FCC Warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution:

Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

ISED Statement

English: This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device. The digital apparatus complies with Canadian CAN ICES-3 (B)/NMB-3 (B).

French: Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Radiation Exposure Statement

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Déclaration d'exposition aux radiations

Cet équipement est conforme Canada limites d'exposition aux radiations dans un environnement non contrôlé. Cet équipement doit être installé et utilisé à distance minimum de 20cm entre le radiateur et votre corps.