



802.11be-EHT40 26 dB Bandwidth & 99% Bandwidth


Channel 38 (5190 MHz)

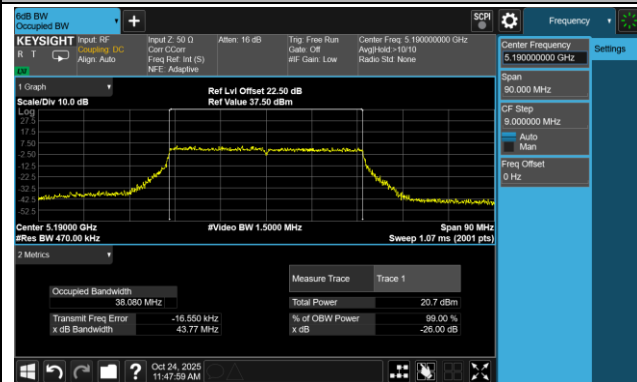


Channel 46 (5230 MHz)

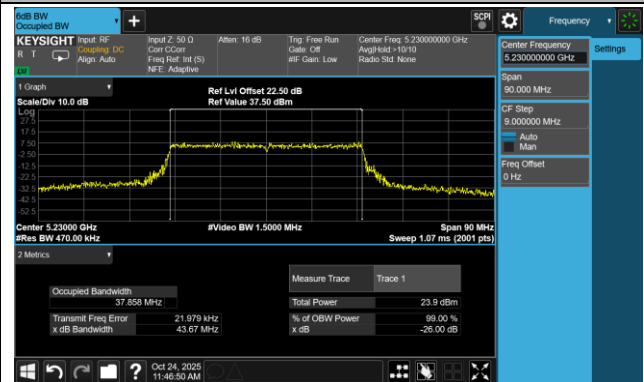


Channel 54 (5270 MHz)

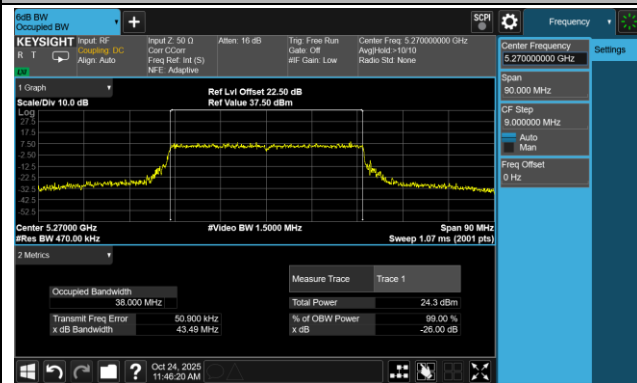


Channel 62 (5310 MHz)

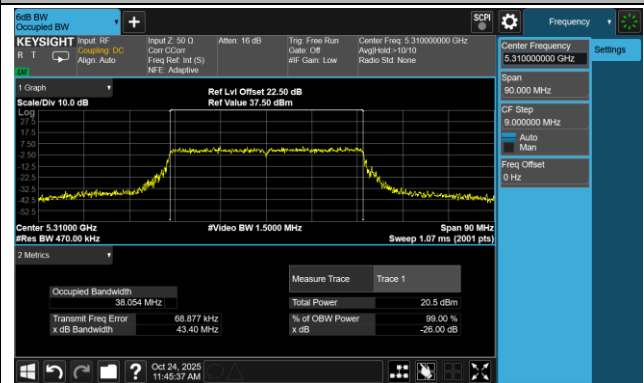


Channel 102 (5510 MHz)

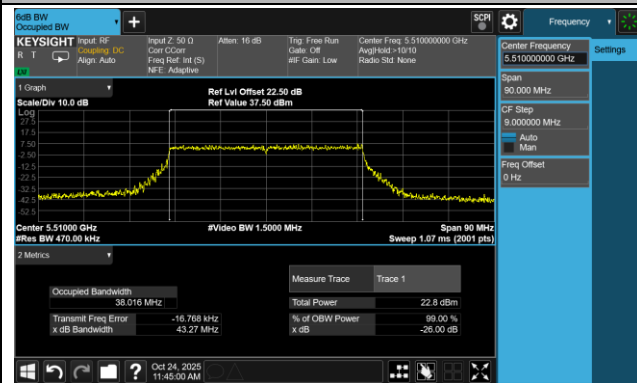


Channel 110 (5550 MHz)

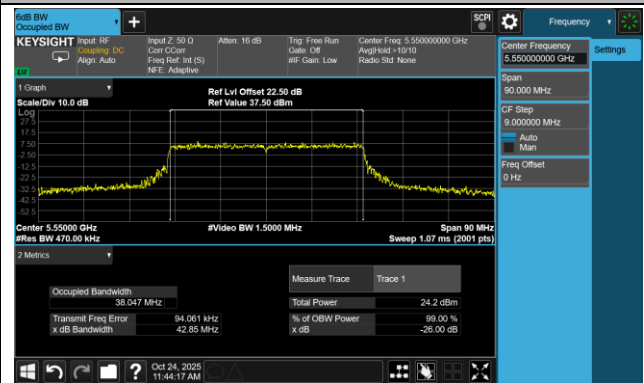


Channel 134 (5670 MHz)

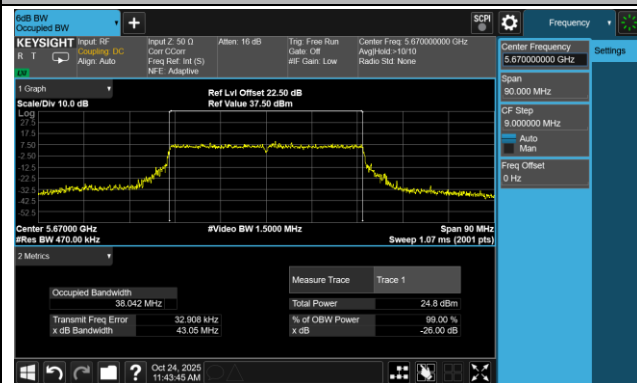


Channel 142(5710 MHz)

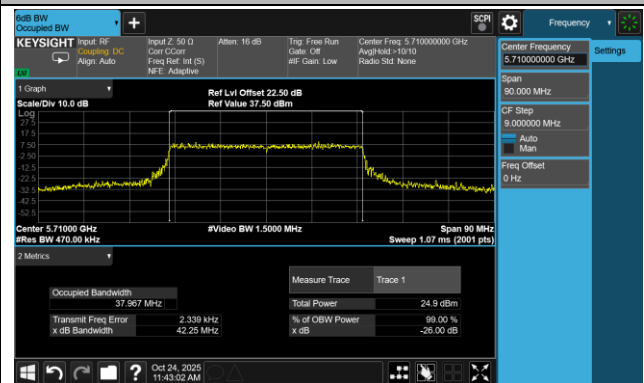

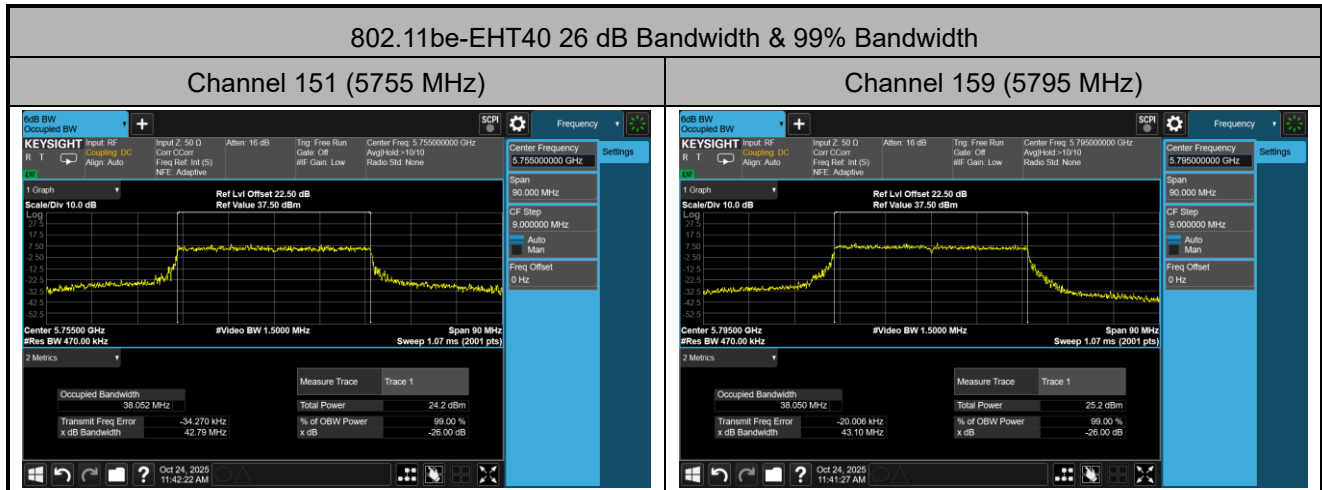


802.11be-EHT80 26 dB Bandwidth & 99% Bandwidth


Channel 42 (5210 MHz)

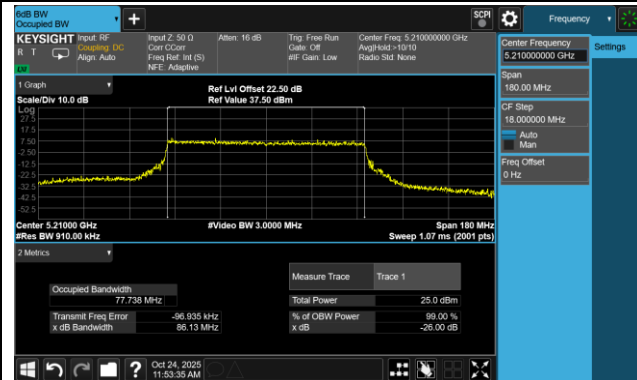


Channel 58 (5290 MHz)

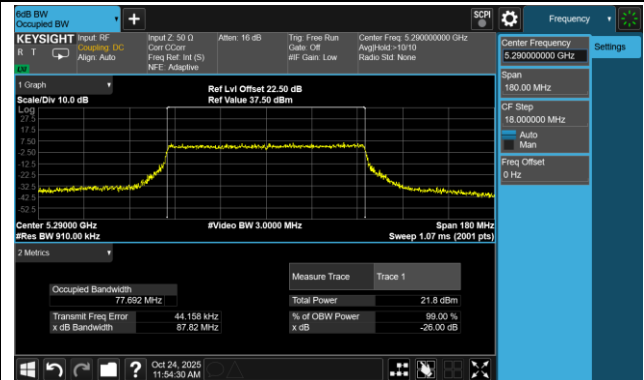


Channel 106 (5530 MHz)

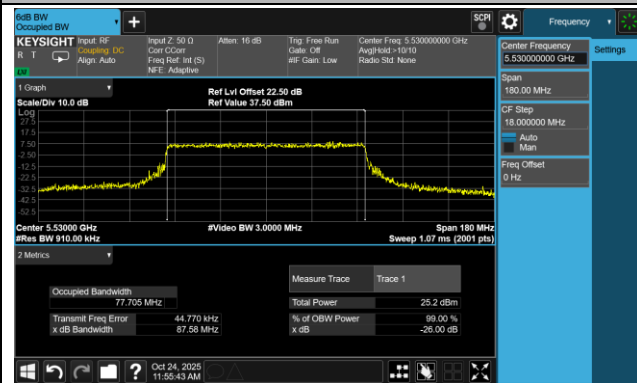


Channel 122 (5610 MHz)

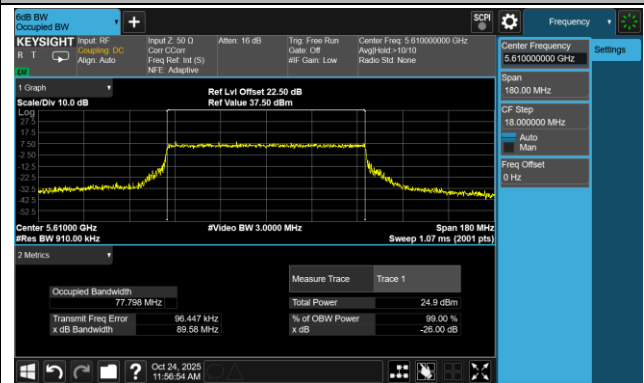


Channel 138 (5690 MHz)

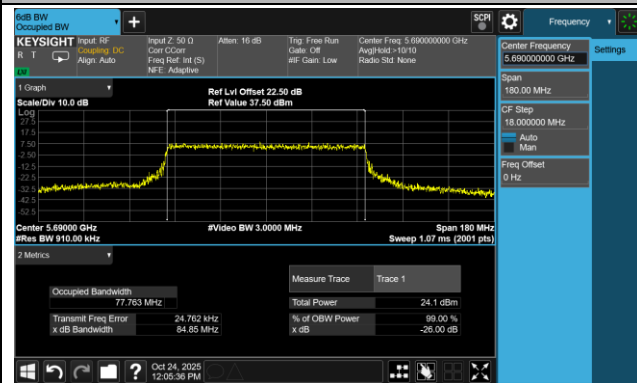

Channel 155 (5775 MHz)

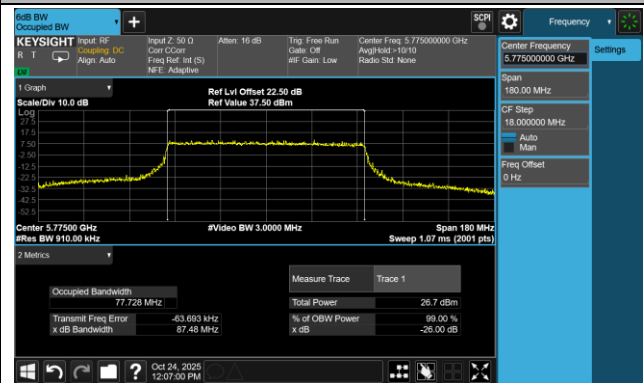


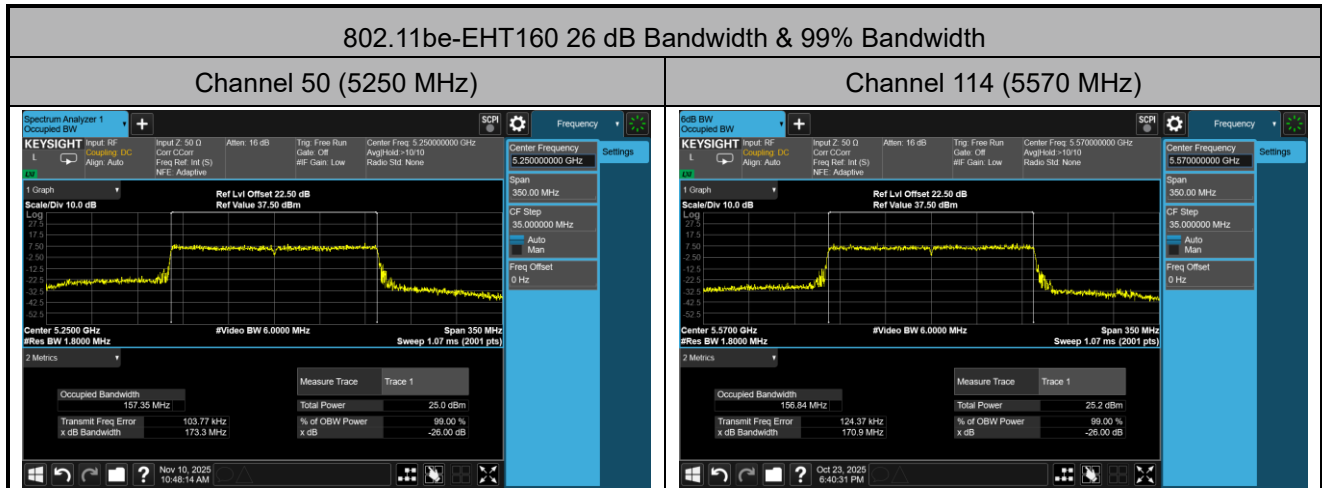

A.3 6 dB Bandwidth Test Result


Test Site	WJ-SR9	Test Engineer	Simon Lu
Test Date	2025-10-23	Model No.	OAW-AP1501

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
11a	6 Mbps	149	5745	16.40	≥ 0.5
11a	6 Mbps	157	5785	16.40	≥ 0.5
11a	6 Mbps	165	5825	16.38	≥ 0.5
11ac-VHT20	MCS0	149	5745	17.71	≥ 0.5
11ac-VHT20	MCS0	157	5785	17.62	≥ 0.5
11ac-VHT20	MCS0	165	5825	17.84	≥ 0.5
11ac-VHT40	MCS0	151	5755	36.39	≥ 0.5
11ac-VHT40	MCS0	159	5795	36.40	≥ 0.5
11ac-VHT80	MCS0	155	5775	75.85	≥ 0.5
11be-EHT20	MCS0	149	5745	19.01	≥ 0.5
11be-EHT20	MCS0	157	5785	19.03	≥ 0.5
11be-EHT20	MCS0	165	5825	19.03	≥ 0.5
11be-EHT40	MCS0	151	5755	38.34	≥ 0.5
11be-EHT40	MCS0	159	5795	37.79	≥ 0.5
11be-EHT80	MCS0	155	5775	77.98	≥ 0.5

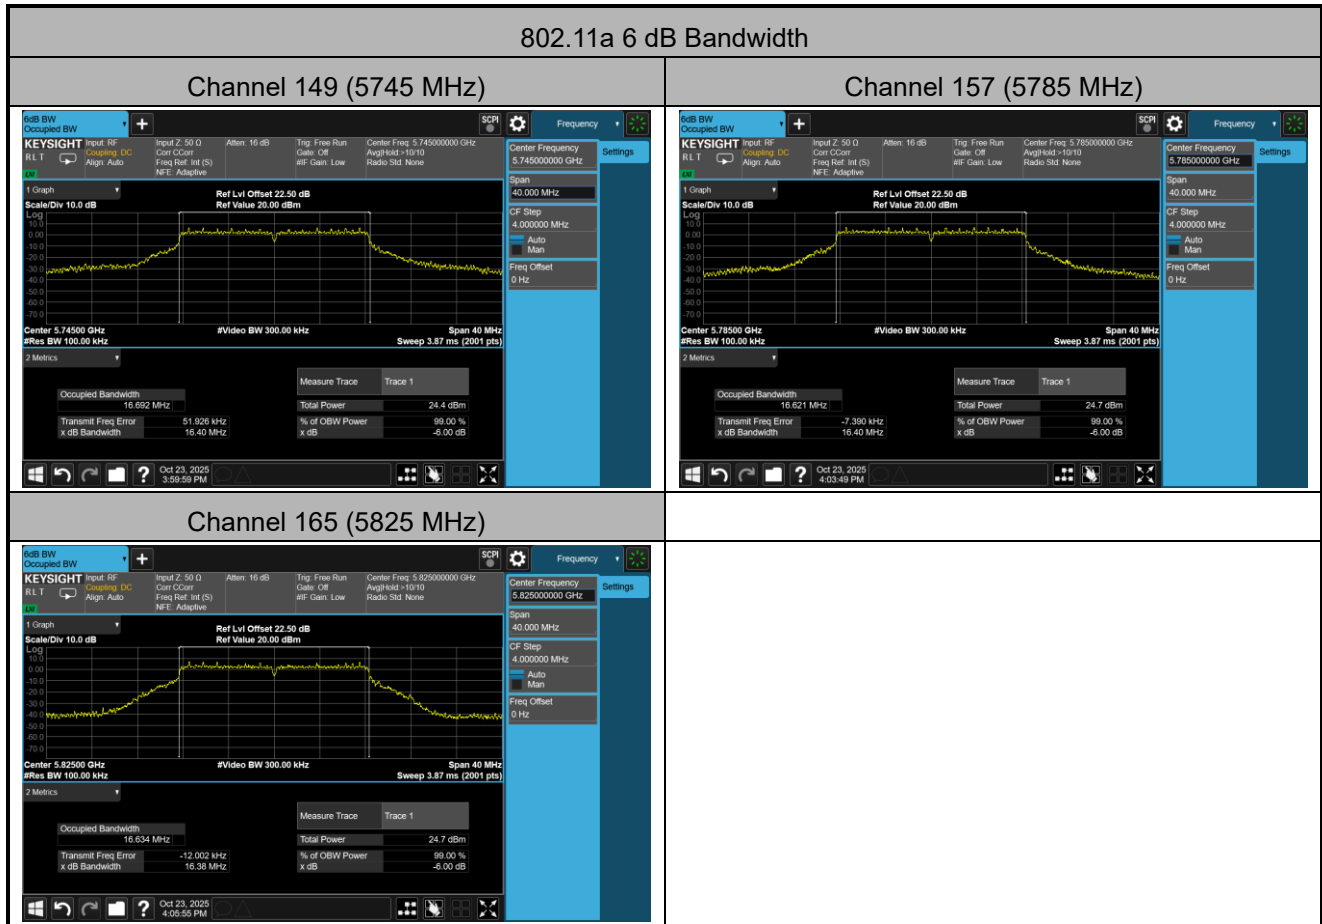


802.11ac-VHT20 6 dB Bandwidth


Channel 149 (5745 MHz)

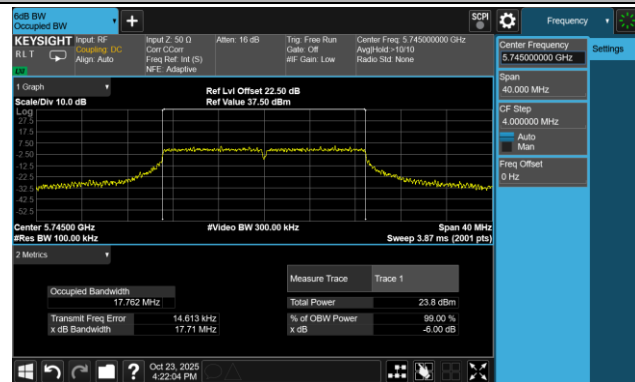

Channel 157 (5785 MHz)

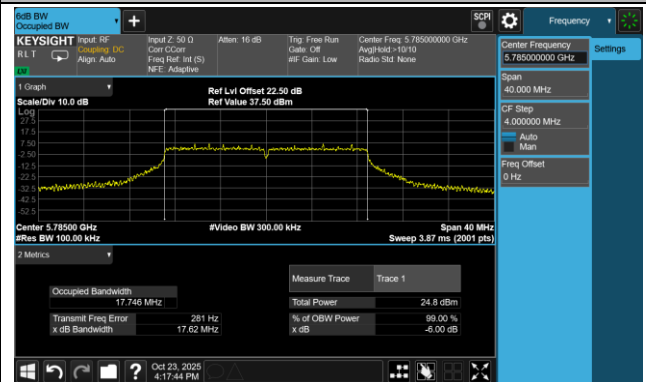


Channel 165 (5825 MHz)

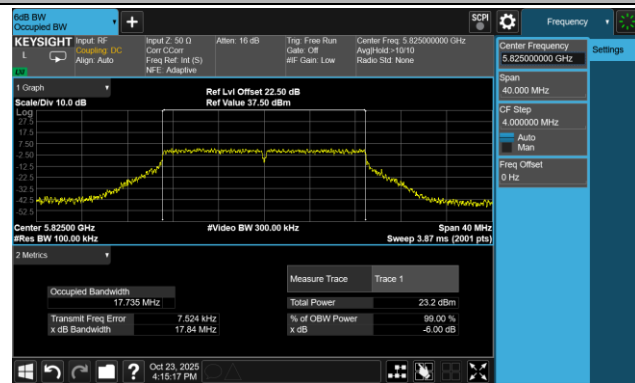



802.11ac-VHT40 6 dB Bandwidth

Channel 151 (5755 MHz)

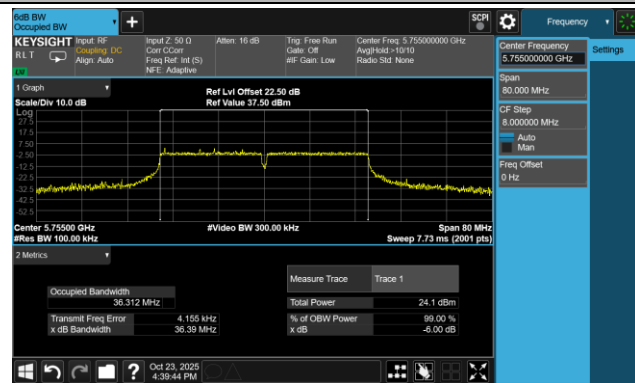


Channel 159 (5795 MHz)

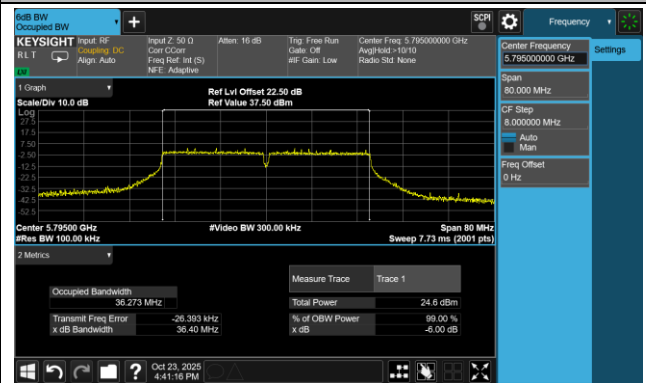

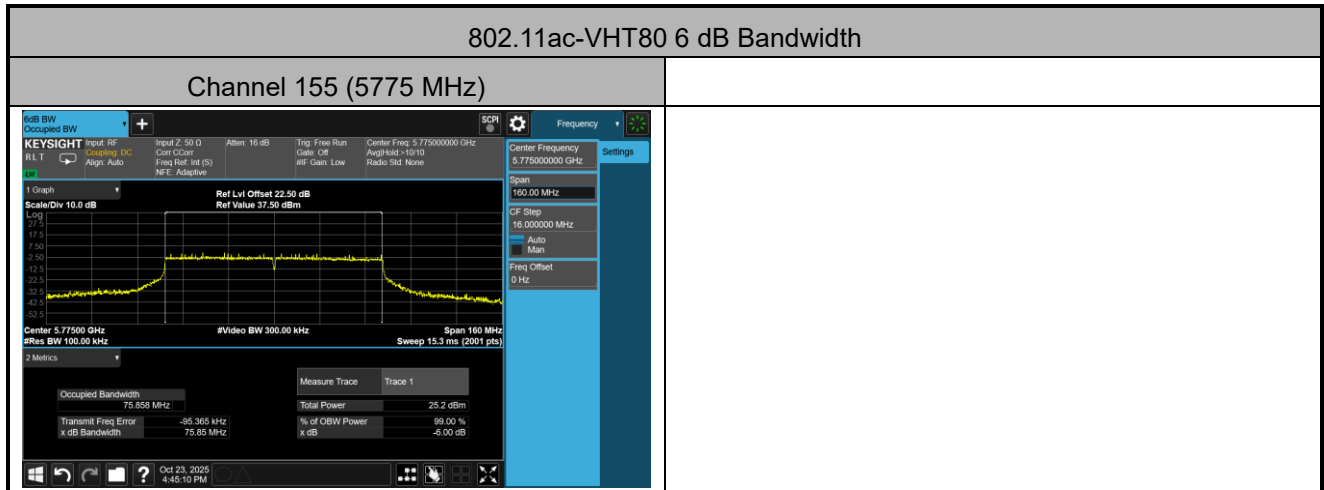


802.11be-EHT20 6 dB Bandwidth


Channel 149 (5745 MHz)

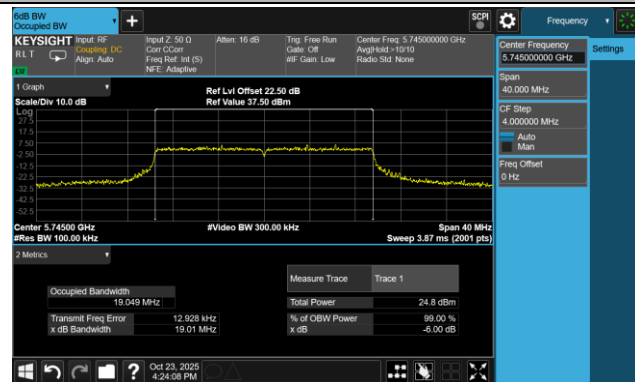

Channel 157 (5785 MHz)

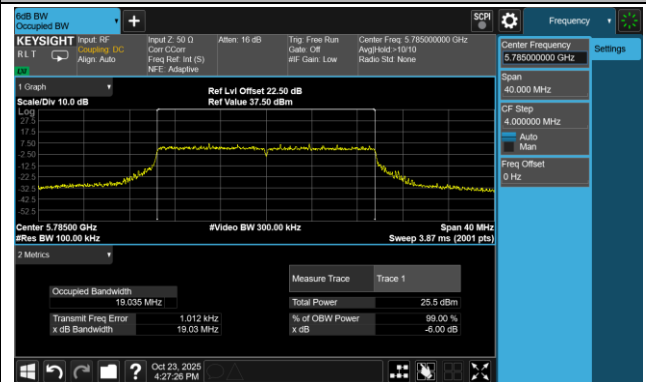


Channel 165 (5825 MHz)

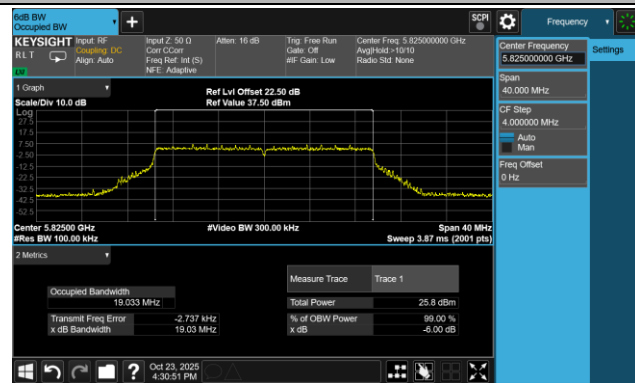



802.11be-EHT40 6 dB Bandwidth

Channel 151 (5755 MHz)

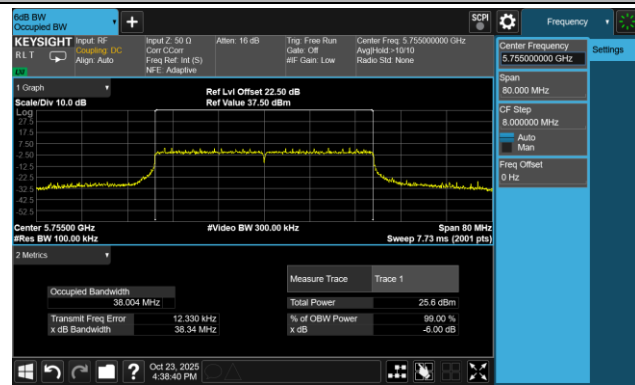

Channel 159 (5795 MHz)

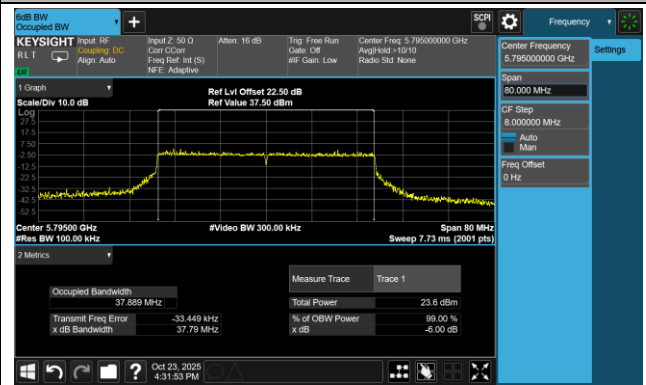

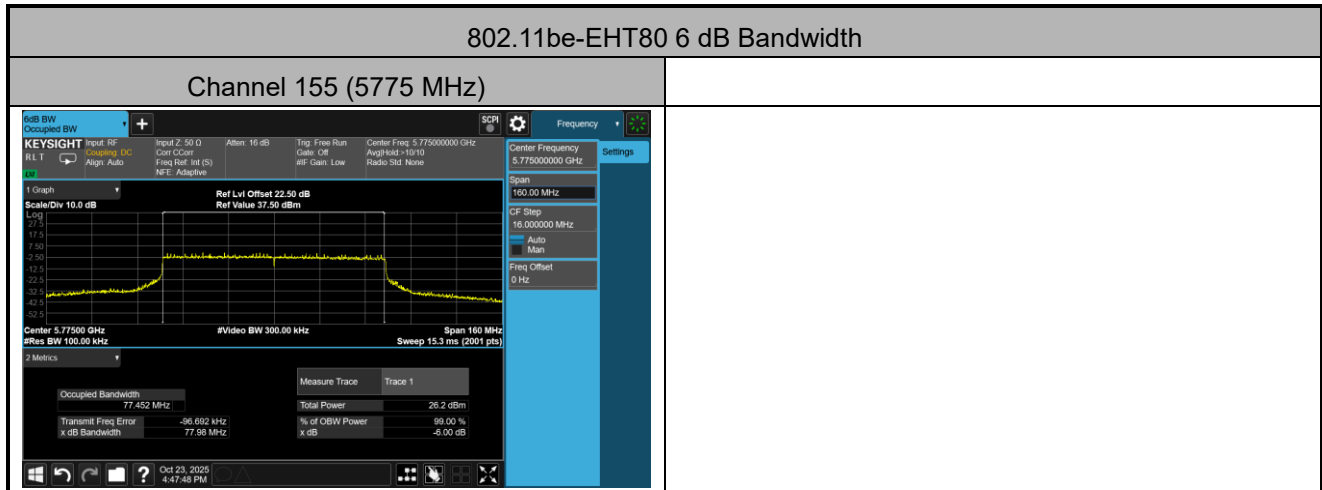

A.4 Output Power Test Result

Test Site	WJ-SR9	Test Engineer	Simon Lu
Test Date	2025-10-10 ~ 2025-10-18	Test Mode	CDD Mode
Model No.	OAW-AP1501		

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Power Limit (dBm)
				Ant 0	Ant 1		
11a	6 Mbps	36	5180	18.49	17.71	21.13	≤ 30.00
11a	6 Mbps	44	5220	18.37	17.75	21.08	≤ 30.00
11a	6 Mbps	48	5240	18.08	17.82	20.96	≤ 30.00
11a	6 Mbps	52	5260	17.85	17.76	20.82	≤ 23.98
11a	6 Mbps	60	5300	17.76	17.71	20.75	≤ 23.98
11a	6 Mbps	64	5320	17.62	18.47	21.08	≤ 23.98
11a	6 Mbps	100	5500	17.72	17.91	20.83	≤ 23.98
11a	6 Mbps	116	5580	18.35	17.62	21.01	≤ 23.98
11a	6 Mbps	140	5700	17.67	17.76	20.73	≤ 23.98
11a	6 Mbps	144	5720	17.71	17.61	20.67	≤ 23.98
11a	6 Mbps	149	5745	17.89	17.96	20.94	≤ 30.00
11a	6 Mbps	157	5785	17.96	17.99	20.99	≤ 30.00
11a	6 Mbps	165	5825	17.78	18.12	20.96	≤ 30.00
11ac-VHT20	MCS0	36	5180	18.31	17.97	21.15	≤ 30.00
11ac-VHT20	MCS0	44	5220	18.31	17.95	21.14	≤ 30.00
11ac-VHT20	MCS0	48	5240	18.21	17.88	21.06	≤ 30.00
11ac-VHT20	MCS0	52	5260	17.82	17.75	20.80	≤ 23.98
11ac-VHT20	MCS0	60	5300	17.73	17.77	20.76	≤ 23.98
11ac-VHT20	MCS0	64	5320	17.82	18.15	21.00	≤ 23.98
11ac-VHT20	MCS0	100	5500	17.74	17.76	20.76	≤ 23.98
11ac-VHT20	MCS0	116	5580	18.28	17.72	21.02	≤ 23.98
11ac-VHT20	MCS0	140	5700	17.75	17.64	20.71	≤ 23.98
11ac-VHT20	MCS0	144	5720	17.88	17.83	20.87	≤ 23.98
11ac-VHT20	MCS0	149	5745	17.64	17.90	20.78	≤ 30.00
11ac-VHT20	MCS0	157	5785	18.01	17.98	21.01	≤ 30.00
11ac-VHT20	MCS0	165	5825	17.83	18.19	21.02	≤ 30.00

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Power Limit (dBm)
				Ant 0	Ant 1		
11ac-VHT40	MCS0	38	5190	12.88	12.70	15.80	≤ 30.00
11ac-VHT40	MCS0	46	5230	18.31	17.79	21.07	≤ 30.00
11ac-VHT40	MCS0	54	5270	17.74	17.71	20.74	≤ 23.98
11ac-VHT40	MCS0	62	5310	13.44	13.79	16.63	≤ 23.98
11ac-VHT40	MCS0	102	5510	15.92	15.94	18.94	≤ 23.98
11ac-VHT40	MCS0	110	5550	18.46	17.84	21.17	≤ 23.98
11ac-VHT40	MCS0	134	5670	17.69	17.88	20.80	≤ 23.98
11ac-VHT40	MCS0	142	5710	18.35	18.04	21.21	≤ 23.98
11ac-VHT40	MCS0	151	5755	18.03	17.96	21.01	≤ 30.00
11ac-VHT40	MCS0	159	5795	17.83	18.04	20.95	≤ 30.00
11ac-VHT80	MCS0	42	5210	12.39	12.34	15.38	≤ 30.00
11ac-VHT80	MCS0	58	5290	13.88	14.41	17.16	≤ 23.98
11ac-VHT80	MCS0	106	5530	14.68	14.64	17.67	≤ 23.98
11ac-VHT80	MCS0	122	5610	17.98	18.14	21.07	≤ 23.98
11ac-VHT80	MCS0	138	5690	17.92	17.58	20.76	≤ 23.98
11ac-VHT80	MCS0	155	5775	17.73	18.11	20.93	≤ 30.00
11ac-VHT160	MCS0	50	5250	12.43	12.43	15.44	≤ 23.98
11ac-VHT160	MCS0	114	5570	15.01	14.71	17.87	≤ 23.98
11ax-HE20	MCS0	36	5180	17.99	17.46	20.74	≤ 30.00
11ax-HE20	MCS0	44	5220	18.47	18.06	21.28	≤ 30.00
11ax-HE20	MCS0	48	5240	18.01	18.14	21.09	≤ 30.00
11ax-HE20	MCS0	52	5260	17.75	17.99	20.88	≤ 23.98
11ax-HE20	MCS0	60	5300	17.71	17.95	20.84	≤ 23.98
11ax-HE20	MCS0	64	5320	17.89	18.34	21.13	≤ 23.98
11ax-HE20	MCS0	100	5500	17.79	17.86	20.84	≤ 23.98
11ax-HE20	MCS0	116	5580	17.89	18.03	20.97	≤ 23.98
11ax-HE20	MCS0	140	5700	17.36	17.85	20.62	≤ 23.98
11ax-HE20	MCS0	144	5720	17.76	17.86	20.82	≤ 23.98
11ax-HE20	MCS0	149	5745	17.91	18.05	20.99	≤ 30.00
11ax-HE20	MCS0	157	5785	18.04	18.31	21.19	≤ 30.00
11ax-HE20	MCS0	165	5825	17.62	17.75	20.70	≤ 30.00

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Power Limit (dBm)
				Ant 0	Ant 1		
11ax-HE40	MCS0	38	5190	13.11	13.14	16.14	≤ 30.00
11ax-HE40	MCS0	46	5230	18.04	17.81	20.94	≤ 30.00
11ax-HE40	MCS0	54	5270	17.48	17.59	20.55	≤ 23.98
11ax-HE40	MCS0	62	5310	14.14	14.81	17.50	≤ 23.98
11ax-HE40	MCS0	102	5510	16.57	16.43	19.51	≤ 23.98
11ax-HE40	MCS0	110	5550	18.12	17.89	21.02	≤ 23.98
11ax-HE40	MCS0	134	5670	17.81	17.94	20.89	≤ 23.98
11ax-HE40	MCS0	142	5710	18.14	18.06	21.11	≤ 23.98
11ax-HE40	MCS0	151	5755	18.03	17.64	20.85	≤ 30.00
11ax-HE40	MCS0	159	5795	17.93	17.44	20.70	≤ 30.00
11ax-HE80	MCS0	42	5210	12.64	12.49	15.58	≤ 30.00
11ax-HE80	MCS0	58	5290	14.06	14.27	17.18	≤ 23.98
11ax-HE80	MCS0	106	5530	14.79	14.84	17.83	≤ 23.98
11ax-HE80	MCS0	122	5610	18.21	17.67	20.96	≤ 23.98
11ax-HE80	MCS0	138	5690	17.68	17.78	20.74	≤ 23.98
11ax-HE80	MCS0	155	5775	17.88	17.53	20.72	≤ 30.00
11ax-HE160	MCS0	50	5250	12.62	12.57	15.61	≤ 23.98
11ax-HE160	MCS0	114	5570	16.06	15.78	18.93	≤ 23.98
11be-EHT20	MCS0	36	5180	17.87	17.64	20.77	≤ 30.00
11be-EHT20	MCS0	44	5220	18.43	18.23	21.34	≤ 30.00
11be-EHT20	MCS0	48	5240	18.21	17.98	21.11	≤ 30.00
11be-EHT20	MCS0	52	5260	17.93	17.82	20.89	≤ 23.98
11be-EHT20	MCS0	60	5300	17.87	17.80	20.85	≤ 23.98
11be-EHT20	MCS0	64	5320	17.99	18.27	21.14	≤ 23.98
11be-EHT20	MCS0	100	5500	17.94	17.79	20.88	≤ 23.98
11be-EHT20	MCS0	116	5580	18.34	17.62	21.01	≤ 23.98
11be-EHT20	MCS0	140	5700	17.84	17.75	20.81	≤ 23.98
11be-EHT20	MCS0	144	5720	17.91	17.74	20.84	≤ 23.98
11be-EHT20	MCS0	149	5745	17.95	18.03	21.00	≤ 30.00
11be-EHT20	MCS0	157	5785	18.25	18.12	21.20	≤ 30.00
11be-EHT20	MCS0	165	5825	17.62	17.81	20.73	≤ 30.00

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Power Limit (dBm)
				Ant 0	Ant 1		
11be-EHT40	MCS0	38	5190	13.27	13.01	16.15	≤ 30.00
11be-EHT40	MCS0	46	5230	18.18	17.69	20.95	≤ 30.00
11be-EHT40	MCS0	54	5270	17.57	17.53	20.56	≤ 23.98
11be-EHT40	MCS0	62	5310	14.12	14.86	17.52	≤ 23.98
11be-EHT40	MCS0	102	5510	16.62	16.39	19.52	≤ 23.98
11be-EHT40	MCS0	110	5550	18.23	17.80	21.03	≤ 23.98
11be-EHT40	MCS0	134	5670	18.26	17.71	21.00	≤ 23.98
11be-EHT40	MCS0	142	5710	18.26	18.04	21.16	≤ 23.98
11be-EHT40	MCS0	151	5755	17.88	17.82	20.86	≤ 30.00
11be-EHT40	MCS0	159	5795	17.72	18.01	20.88	≤ 30.00
11be-EHT80	MCS0	42	5210	12.68	12.52	15.61	≤ 30.00
11be-EHT80	MCS0	58	5290	13.93	14.46	17.21	≤ 23.98
11be-EHT80	MCS0	106	5530	14.84	14.82	17.84	≤ 23.98
11be-EHT80	MCS0	122	5610	18.09	17.82	20.97	≤ 23.98
11be-EHT80	MCS0	138	5690	18.02	17.93	20.99	≤ 23.98
11be-EHT80	MCS0	155	5775	17.98	18.13	21.07	≤ 30.00
11be-EHT160	MCS0	50	5250	12.61	12.63	15.63	≤ 23.98
11be-EHT160	MCS0	114	5570	16.02	15.86	18.95	≤ 23.98

Note 1: Total Average Power (dBm) = $10 \times \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

Note 2: For Band-Crossing channel, Average Power Limit = 23.98 dBm or $11 + 10 \times \log_{10} \text{EBW}_{2C}$, which is less.

A.5 Power Spectral Density Test Result

Test Site	WJ-SR9	Test Engineer	Simon Lu
Test Date	2025-10-17 ~ 2025-11-13	Model No.	OAW-AP1501
Test Item	Power Spectral Density (UNII-1 & UNII-2A & UNII-2C)		

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/ MHz)
				Ant 0	Ant 1			
11a	6 Mbps	36	5180	6.919	6.286	99.05	9.62	≤ 17.00
11a	6 Mbps	44	5220	7.099	6.428	99.05	9.79	≤ 17.00
11a	6 Mbps	48	5240	6.446	5.983	99.05	9.23	≤ 17.00
11a	6 Mbps	52	5260	5.979	5.863	99.05	8.93	≤ 11.00
11a	6 Mbps	60	5300	5.815	5.946	99.05	8.89	≤ 11.00
11a	6 Mbps	64	5320	5.988	6.306	99.05	9.16	≤ 11.00
11a	6 Mbps	100	5500	6.048	5.879	99.05	8.97	≤ 11.00
11a	6 Mbps	116	5580	6.762	5.923	99.05	9.37	≤ 11.00
11a	6 Mbps	140	5700	6.193	5.571	99.05	8.90	≤ 11.00
11a	6 Mbps	144	5720	6.091	6.021	99.05	9.07	≤ 11.00
11ac-VHT20	MCS0	36	5180	6.493	5.905	98.46	9.22	≤ 17.00
11ac-VHT20	MCS0	44	5220	6.332	5.736	98.46	9.05	≤ 17.00
11ac-VHT20	MCS0	48	5240	6.093	5.642	98.46	8.88	≤ 17.00
11ac-VHT20	MCS0	52	5260	5.716	5.401	98.46	8.57	≤ 11.00
11ac-VHT20	MCS0	60	5300	5.464	5.487	98.46	8.49	≤ 11.00
11ac-VHT20	MCS0	64	5320	5.761	5.856	98.46	8.82	≤ 11.00
11ac-VHT20	MCS0	100	5500	5.571	5.383	98.46	8.49	≤ 11.00
11ac-VHT20	MCS0	116	5580	6.330	5.440	98.46	8.92	≤ 11.00
11ac-VHT20	MCS0	140	5700	5.916	5.470	98.46	8.71	≤ 11.00
11ac-VHT20	MCS0	144	5720	5.763	5.495	98.46	8.64	≤ 11.00
11ac-VHT40	MCS0	38	5190	-1.330	-1.397	98.07	1.65	≤ 17.00
11ac-VHT40	MCS0	46	5230	3.805	3.087	98.07	6.47	≤ 17.00
11ac-VHT40	MCS0	54	5270	2.904	3.039	98.07	5.98	≤ 11.00
11ac-VHT40	MCS0	62	5310	-1.327	-1.052	98.07	1.82	≤ 11.00
11ac-VHT40	MCS0	102	5510	0.843	0.916	98.07	3.89	≤ 11.00
11ac-VHT40	MCS0	110	5550	3.433	3.348	98.07	6.40	≤ 11.00
11ac-VHT40	MCS0	134	5670	3.089	3.133	98.07	6.12	≤ 11.00
11ac-VHT40	MCS0	142	5710	3.794	3.199	98.07	6.52	≤ 11.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)		Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/ MHz)
				Ant 0	Ant 1			
11ac-VHT80	MCS0	42	5210	-4.577	-4.684	98.08	-1.62	≤ 17.00
11ac-VHT80	MCS0	58	5290	-4.264	-3.471	98.08	-0.84	≤ 11.00
11ac-VHT80	MCS0	106	5530	-3.280	-3.209	98.08	-0.23	≤ 11.00
11ac-VHT80	MCS0	122	5610	0.901	0.076	98.08	3.52	≤ 11.00
11ac-VHT80	MCS0	138	5690	0.651	1.700	98.08	4.22	≤ 11.00
11ac-VHT160	MCS0	50	5250	-6.759	-7.428	99.03	-4.07	≤ 11.00
11ac-VHT160	MCS0	114	5570	-5.474	-5.636	99.03	-2.54	≤ 11.00
11be-EHT20	MCS0	36	5180	6.051	5.495	98.08	8.79	≤ 17.00
11be-EHT20	MCS0	44	5220	6.496	5.942	98.08	9.24	≤ 17.00
11be-EHT20	MCS0	48	5240	6.074	5.788	98.08	8.94	≤ 17.00
11be-EHT20	MCS0	52	5260	5.926	5.697	98.08	8.82	≤ 11.00
11be-EHT20	MCS0	60	5300	5.734	5.913	98.08	8.83	≤ 11.00
11be-EHT20	MCS0	64	5320	6.048	6.200	98.08	9.13	≤ 11.00
11be-EHT20	MCS0	100	5500	6.063	5.463	98.08	8.78	≤ 11.00
11be-EHT20	MCS0	116	5580	6.614	5.917	98.08	9.29	≤ 11.00
11be-EHT20	MCS0	140	5700	6.377	5.761	98.08	9.09	≤ 11.00
11be-EHT20	MCS0	144	5720	6.224	6.108	98.08	9.18	≤ 11.00
11be-EHT40	MCS0	38	5190	-0.087	-0.038	98.66	2.95	≤ 17.00
11be-EHT40	MCS0	46	5230	3.620	3.071	98.66	6.36	≤ 17.00
11be-EHT40	MCS0	54	5270	2.883	2.835	98.66	5.87	≤ 11.00
11be-EHT40	MCS0	62	5310	-0.093	0.826	98.66	3.40	≤ 11.00
11be-EHT40	MCS0	102	5510	1.959	1.658	98.66	4.82	≤ 11.00
11be-EHT40	MCS0	110	5550	3.349	2.859	98.66	6.12	≤ 11.00
11be-EHT40	MCS0	134	5670	2.472	3.071	98.66	5.79	≤ 11.00
11be-EHT40	MCS0	142	5710	3.382	2.950	98.66	6.18	≤ 11.00
11be-EHT80	MCS0	42	5210	-3.548	-3.959	98.28	-0.74	≤ 17.00
11be-EHT80	MCS0	58	5290	-3.142	-2.249	98.28	0.34	≤ 11.00
11be-EHT80	MCS0	106	5530	-2.448	-2.401	98.28	0.59	≤ 11.00
11be-EHT80	MCS0	122	5610	1.137	0.153	98.28	3.68	≤ 11.00
11be-EHT80	MCS0	138	5690	0.649	0.182	98.28	3.43	≤ 11.00
11be-EHT160	MCS0	50	5250	-6.508	-6.744	98.84	-3.61	≤ 11.00
11be-EHT160	MCS0	114	5570	-3.564	-3.834	98.84	-0.69	≤ 11.00

Duty Cycle < 98%, Total PSD (dBm/MHz) = $10 \times \log \{10^{(\text{Ant 0 AVPSD}/10)} + 10^{(\text{Ant 1 AVPSD}/10)}\} + 10 \times \log (1/\text{Duty cycle})$;

Duty Cycle ≥ 98%, Total PSD (dBm/MHz) = $10 \times \log \{10^{(\text{Ant 0 AVPSD}/10)} + 10^{(\text{Ant 1 AVPSD}/10)}\}$.

Test Site	WJ-SR9	Test Engineer	Simon Lu
Test Date	2025-10-17 ~ 2025-11-13	Model No.	OAW-AP1501
Test Item	Power Spectral Density (UNII-Band 3)		


Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/510 kHz)		Duty Cycle (%)	Total PSD (dBm/ 510 kHz)	PSD Limit (dBm/ 500 kHz)
				Ant 0	Ant 1			
11a	6 Mbps	149	5745	3.569	3.417	99.05	6.50	≤ 30.00
11a	6 Mbps	157	5785	3.856	3.874	99.05	6.88	≤ 30.00
11a	6 Mbps	165	5825	4.064	3.652	99.05	6.87	≤ 30.00
11ac-VHT20	MCS0	149	5745	3.346	2.725	98.46	6.06	≤ 30.00
11ac-VHT20	MCS0	157	5785	3.601	3.348	98.46	6.49	≤ 30.00
11ac-VHT20	MCS0	165	5825	3.722	3.055	98.46	6.41	≤ 30.00
11ac-VHT40	MCS0	151	5755	0.812	0.107	98.07	3.48	≤ 30.00
11ac-VHT40	MCS0	159	5795	0.627	0.858	98.07	3.75	≤ 30.00
11ac-VHT80	MCS0	155	5775	-2.483	-2.052	98.08	0.75	≤ 30.00
11be-EHT20	MCS0	149	5745	3.211	2.815	98.08	6.03	≤ 30.00
11be-EHT20	MCS0	157	5785	3.368	3.260	98.08	6.32	≤ 30.00
11be-EHT20	MCS0	165	5825	3.703	3.353	98.08	6.54	≤ 30.00
11be-EHT40	MCS0	151	5755	0.203	-0.110	98.66	3.06	≤ 30.00
11be-EHT40	MCS0	159	5795	0.079	0.447	98.66	3.28	≤ 30.00
11be-EHT80	MCS0	155	5775	-2.459	-2.320	98.28	0.62	≤ 30.00

Duty Cycle < 98%, Total PSD (dBm/510 kHz) = $10 \times \log \{10^{(\text{Ant 0 AVPSD}/10)} + 10^{(\text{Ant 1 AVPSD}/10)}\} + 10 \times \log (1/\text{Duty cycle})$;


Duty Cycle ≥ 98%, Total PSD (dBm/510 kHz) = $10 \times \log \{10^{(\text{Ant 0 AVPSD}/10)} + 10^{(\text{Ant 1 AVPSD}/10)}\}$.

802.11a Power Spectral Density - Ant 0


Channel 36 (5180 MHz)

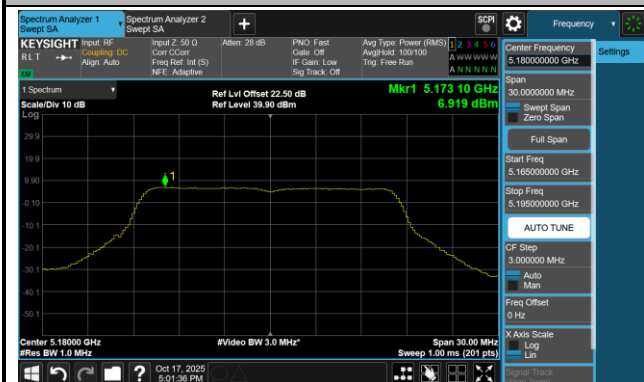

Channel 44 (5220 MHz)

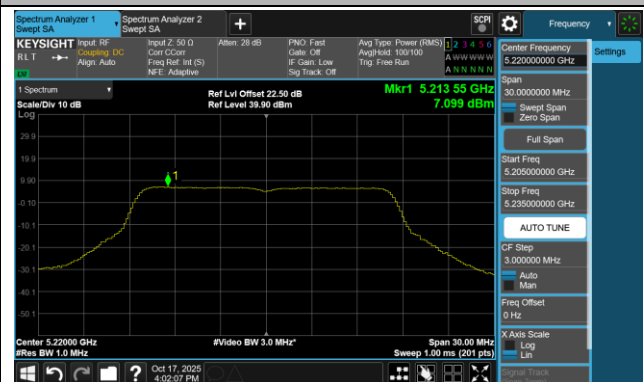

Channel 48 (5240 MHz)

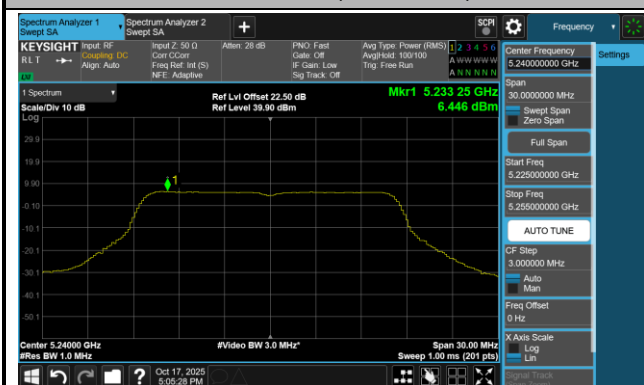


Channel 52 (5260 MHz)



Channel 60 (5300 MHz)




Channel 64 (5320 MHz)

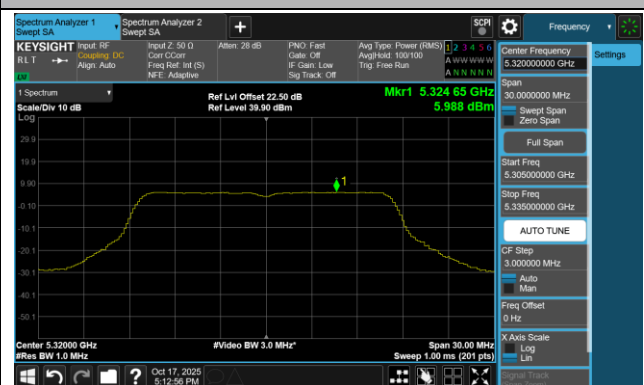


802.11a Power Spectral Density - Ant 0

Channel 100 (5500 MHz)

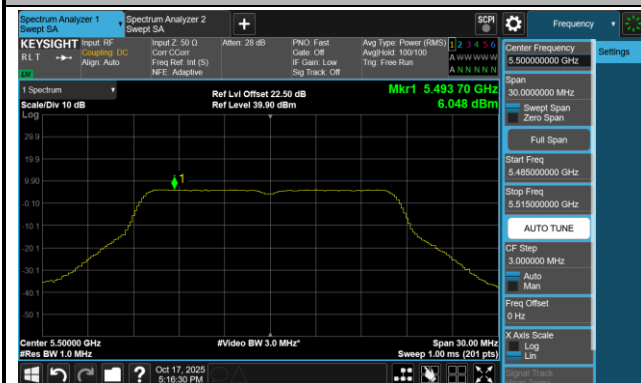

Channel 116 (5580 MHz)

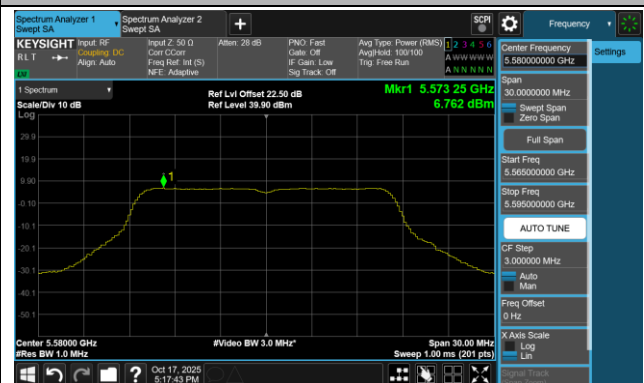

Channel 140 (5700 MHz)



Channel 144(5720 MHz)



Channel 149 (5745 MHz)




Channel 157 (5785 MHz)




802.11a Power Spectral Density - Ant 0

Channel 165 (5825 MHz)

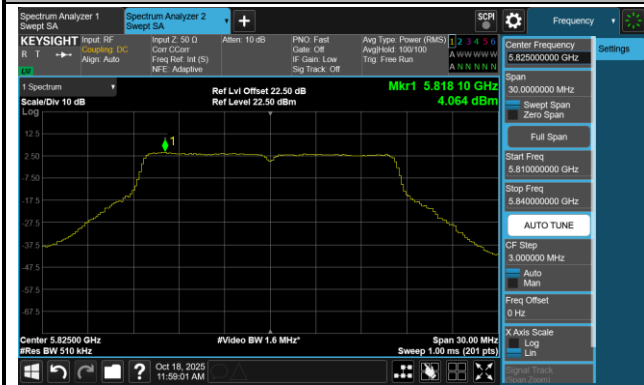

802.11ac-VHT20 Power Spectral Density - Ant 0


Channel 36 (5180 MHz)

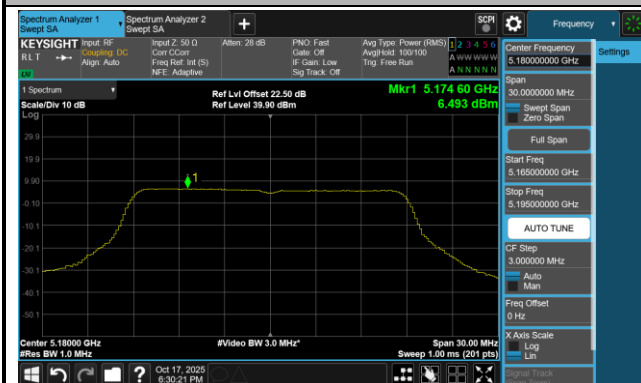

Channel 44 (5220 MHz)




Channel 48 (5240 MHz)

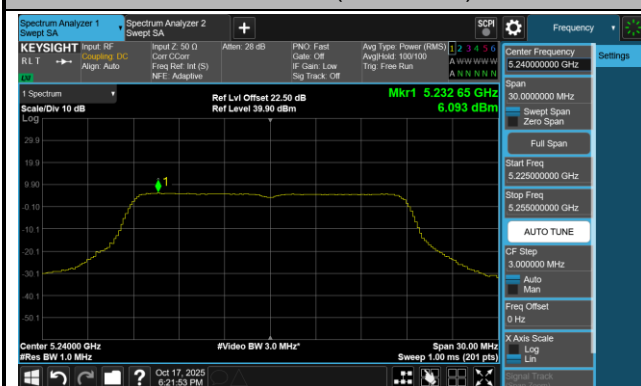


Channel 52 (5260 MHz)



Channel 60 (5300 MHz)

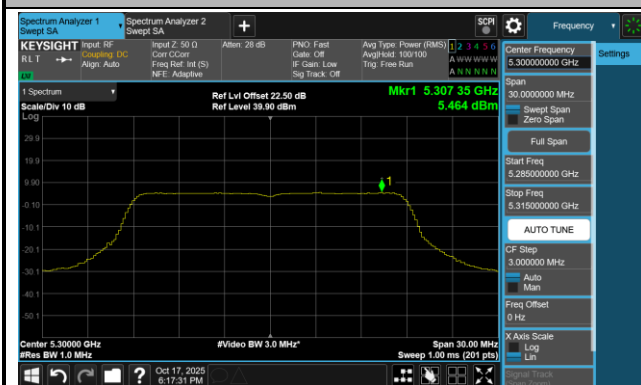


Channel 64 (5320 MHz)

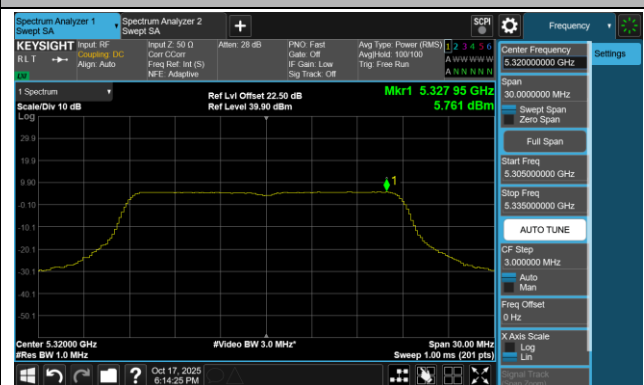


802.11ac-VHT20 Power Spectral Density - Ant 0

Channel 100 (5500 MHz)

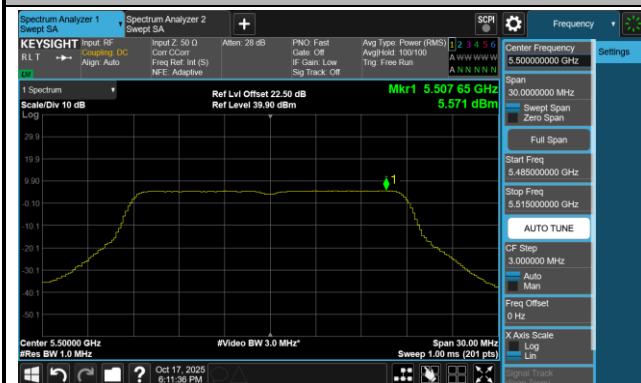

Channel 116 (5580 MHz)

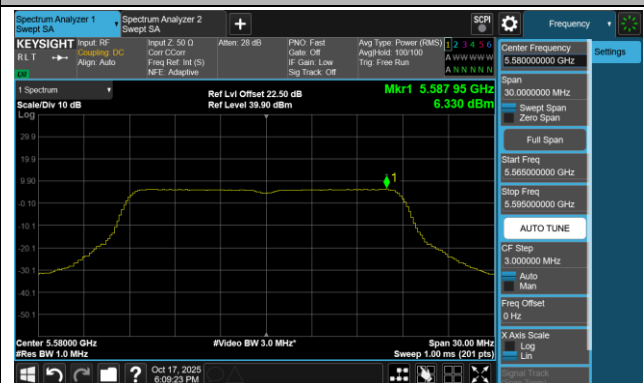


Channel 140 (5700 MHz)



Channel 144(5720 MHz)



Channel 149 (5745 MHz)

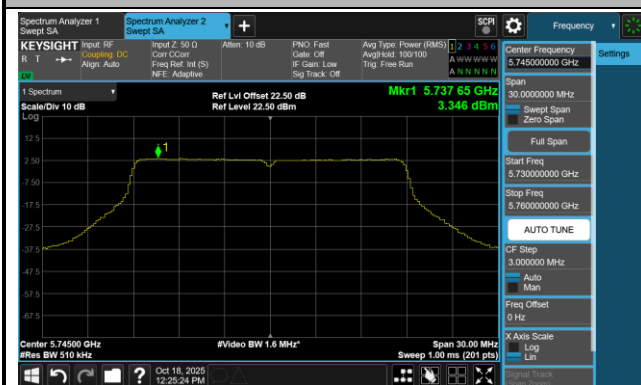


Channel 157 (5785 MHz)



802.11ac-VHT20 Power Spectral Density - Ant 0

Channel 165 (5825 MHz)

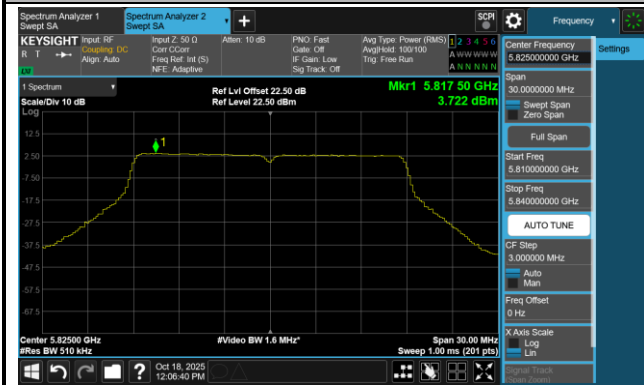


802.11ac-VHT40 Power Spectral Density - Ant 0


Channel 38 (5190 MHz)



Channel 46 (5230 MHz)

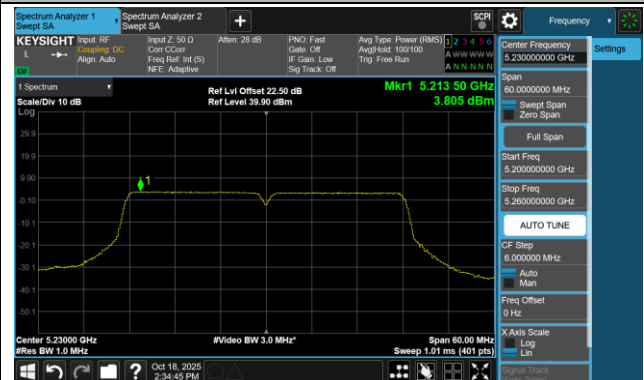


Channel 54 (5270 MHz)

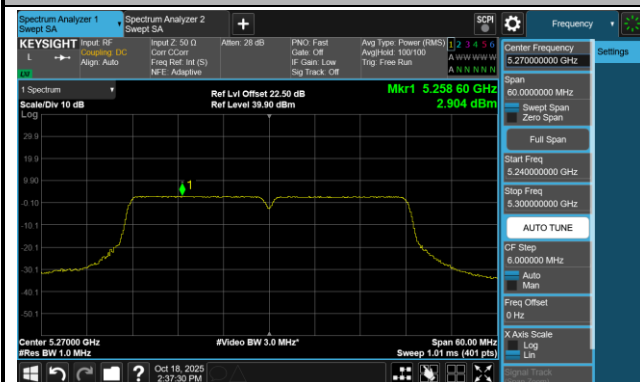


Channel 62 (5310 MHz)



Channel 102 (5510 MHz)

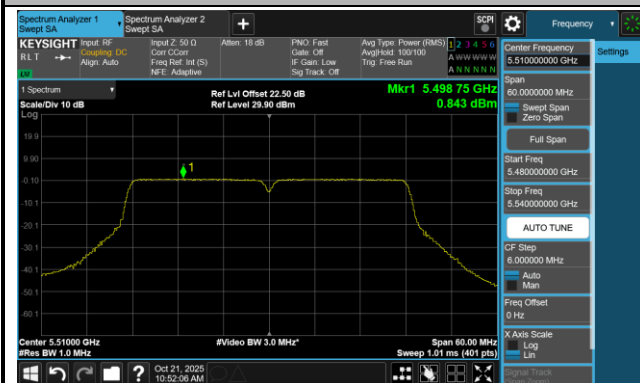


Channel 110 (5550 MHz)

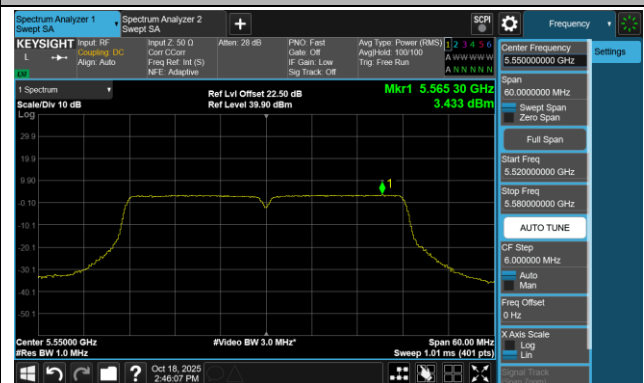

802.11ac-VHT40 Power Spectral Density - Ant 0


Channel 134 (5670 MHz)

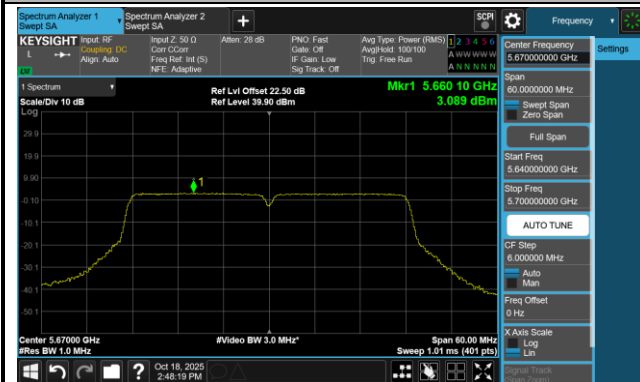

Channel 142(5710 MHz)



Channel 151 (5755 MHz)

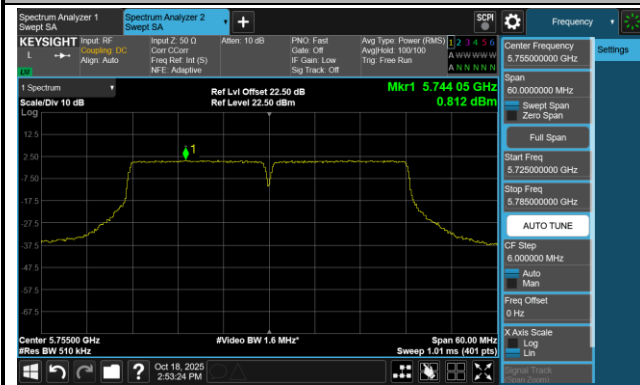

Channel 159 (5795 MHz)

