

RF Test Report

For


Applicant name: Migear International Group LLC
Address: 21 West 38th Street, 14th Floor. New York, NY 10018, United States
EUT name: WIRELESS SPEAKER
Brand name: 2BOOM, FISHER, Crayola
Model number: BT365
Series model number: BT365K-FB, BT365K, FBT365K, CBT365K
FCC ID: 2AIDL-BT365

Issued By

Company name: BTF Testing Lab (Shenzhen) Co., Ltd.
Address: Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China

Report number: BTF260608R00201
Test standards: 47 CFR Part 15.247
Test conclusion: Pass

Date of sample receipt: 2026-06-08
Test date: 2026-06-08 to 2026-06-12
Date of issue: 2026-06-15

Test by: 
Vivi. Yan / Tester

Prepared by: 
Chris Liu / Project engineer

Approved by:



Ryan.CJ / EMC Manager

Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd.. All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue Date	Revisions Content
R_V0	2026-06-15	Original
Note: <i>Once the revision has been made, then previous versions reports are invalid.</i>		

Table of Contents

1 Introduction	4
1.1 Laboratory Location	4
1.2 Laboratory Facility	4
1.3 Announcement	4
2 Product Information	5
2.1 Application Information	5
2.2 Manufacturer Information	5
2.3 Factory Information	5
2.4 General Description of Equipment under Test (EUT)	5
2.5 Technical Information	6
3 Summary of Test Results	7
3.1 Test Standards	7
3.2 Uncertainty of Test	7
3.3 Summary of Test Result	7
3.4 Additions to, deviations, or exclusions from the method	8
4 Test Configuration	9
4.1 Test Equipment List	9
4.2 Test Auxiliary Equipment	10
4.3 Test Modes	10
4.4 Test Channel of EUT	11
4.5 Test software	11
5 Evaluation Results (Evaluation)	12
5.1 Antenna requirement	12
5.1.1 Conclusion	12
6 Radio Spectrum Matter Test Results (RF)	13
6.1 Conducted Emission at AC power line	13
6.1.1 Test Data	14
6.2 20dB Bandwidth	16
6.2.1 Test Data	17
6.3 Maximum Conducted Output Power	18
6.3.1 Test Data	18
6.4 Channel Separation	19
6.4.1 Test Data	20
6.5 Number of Hopping Frequencies	21
6.5.1 Test Data	21
6.6 Dwell Time	22
6.6.1 Test Data	23
6.7 Emissions in non-restricted frequency bands	24
6.7.1 Test Data	24
6.8 Band edge emissions (Radiated)	25
6.8.1 Test Data	26
6.9 Emissions in frequency bands (below 1GHz)	27
6.9.1 Test Data	29
6.10 Emissions in frequency bands (above 1GHz)	31
6.10.1 Test Data	32
7 Test Setup Photos	34
8 EUT Constructional Details (EUT Photos)	34
9 Appendix	35

1 Introduction

1.1 Laboratory Location

Test location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, Guangdong, China
Phone number:	+86-0755-23146130
Fax number:	+86-0755-23146130

1.2 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1409**
BTF Testing Lab (Shenzhen) Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The test firm Registration No. is 695374.
- **CNAS - Registration No.: CNAS L17568**
BTF Testing Lab (Shenzhen) Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L17568.
- **A2LA - Registration No.: 6660.01**
BTF Testing Lab (Shenzhen) Co., Ltd. is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories.
- **ISED – CAB identifier.: CN0135**
The 3m Semi-anechoic chamber of BTF Testing Lab (Shenzhen) Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 27844.

1.3 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.
- (7) All entrusted information in this report is provided by the client and has been confirmed through consultation with the client; The testing items for this report have been discussed and confirmed with the client, and our company is only responsible for the content reflected in the report.

2 Product Information

2.1 Application Information

Company name:	Migear International Group LLC
Address:	21 West 38th Street, 14th Floor. New York, NY 10018, United States

2.2 Manufacturer Information

Company name:	Loud Global (Shenzhen) Import & Export Co., Ltd
Address:	Room 1705, Building A, United Plaza, No.5022 Binhe Avenue, Fushan Community, Futian Street, Futian District, Shenzhen. China

2.3 Factory Information

Company name:	Shenzhen Tianweigao Electronics Co., Ltd.
Address:	Room 201, Building 1, Hengtong Industrial Park, No. 280, Jihua Subdistrict, Longgang District, Shenzhen. China

2.4 General Description of Equipment under Test (EUT)

EUT name:	WIRELESS SPEAKER
Under test model name:	BT365
Series model name:	BT365K-FB, BT365K, FBT365K, CBT365K
Description of model name differentiation:	The model name is different, everything else is the same
Hardware version:	N/A
Software version:	N/A
Ratings:	Input: DC 5V 350mAh BATTERY: 3.7V 800mAh 2.96Wh

2.5 Technical Information

Operation Frequency:	2402MHz to 2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation technology:	GFSK, $\pi/4$ DQPSK, 8DPSK
Maximum Conducted Power:	1.29dBm
Antenna type:	PCB Antenna
Antenna gain:	1.3dBi

Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	/	/

3 Summary of Test Results

3.1 Test Standards

The tests were performed according to following standards:

47 CFR Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

ANSI C63.10-2020+C63.10a-2024: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

KDB 558074 D01 15.247 Meas Guidance v05r02: Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 of The FCC Rules.

3.2 Uncertainty of Test

Measurement	Value
Conducted Emission for LISN (150kHz ~ 30MHz)	±2.45 dB
Occupied Channel Bandwidth	±173.1Hz
RF output power, conducted	±0.66 dB
Time	±5 %
Unwanted Emissions, conducted	±2.32 dB
Radiated Emission(1GHz~18GHz)	±4.80 dB
Radiated Emission(9kHz~30MHz)	±2.20 dB
Radiated Emission(30MHz~1GHz)	±4.94 dB
Radiated Emission (18GHz ~ 40GHz)	±5.08dB
The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

3.3 Summary of Test Result

Item	Standard	Requirement	Result
Antenna requirement	47 CFR Part 15.247	47 CFR 15.203	Pass
Conducted Emission at AC power line	47 CFR Part 15.247	47 CFR 15.207(a)	Pass
20dB Bandwidth	47 CFR Part 15.247	47 CFR 15.247(a)(1)	Pass
Maximum Conducted Output Power	47 CFR Part 15.247	47 CFR 15.247(b)(1)	Pass
Channel Separation	47 CFR Part 15.247	47 CFR 15.247(a)(1)	Pass
Number of Hopping Frequencies	47 CFR Part 15.247	47 CFR 15.247(a)(1)(iii)	Pass
Dwell Time	47 CFR Part 15.247	47 CFR 15.247(a)(1)(iii)	Pass
Emissions in non-restricted frequency bands	47 CFR Part 15.247	47 CFR 15.247(d)	Pass
Band edge emissions (Radiated)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
Emissions in frequency bands (below 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass

Emissions in frequency bands (above 1GHz)	47 CFR Part 15.247	47 CFR 15.247(d), 15.209, 15.205	Pass
Remark: 1. <i>Pass: Meet the requirements.</i> 2. <i>N/A: not applicable.</i>			

3.4 Additions to, deviations, or exclusions from the method

None

4 Test Configuration

4.1 Test Equipment List

Conducted Emission at AC power line					
Test Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Test Software	Frad	EZ_EMC	Version: EMC-CON 3A1.1+	/	/
EMI Receiver	Rohde & Schwarz	ESCI3	101422	2025-10-17	2026-10-16
V-LISN	Schwarzbeck	NSLK 8127	01073	2025-08-23	2026-08-22
Coaxial Switcher	Schwarzbeck	CX210	CX210	/	/
Pulse Limiter	Schwarzbeck	VTSD 9561-F	00953	/	/
LISN-Cable	REBES Talent	LISN9K30M	21101580	2025-08-23	2026-08-22

20dB Bandwidth Maximum Conducted Output Power Channel Separation Number of Hopping Frequencies Dwell Time Emissions in non-restricted frequency bands					
Test Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Test Software	TST Pass	/	Version: 2.0	/	/
Cell Site Test Set	HP	8921A	US35010158	2025-10-17	2026-10-16
Spectrum Analyzer	Keysight	N9020A	MY50410020	2025-10-17	2026-10-16
ESG Vector Signal Generator	Agilent	E4438C	MY45094854	2025-10-17	2026-10-16
MXG Vector Signal Generator	Agilent	N5182A	MY46240163	2025-10-17	2026-10-16
Wideband Radio Communication Tester	Rohde&Schwarz	CMW500	161997	2025-10-17	2026-10-16
Programmable Constant Temperature And Humidity Test Chamber	ZZCKONG	ZZ-K02A	20210928007	2025-10-17	2026-10-16
DC Power Supply	Tongmen	etm-6050c	20211026123	2025-10-17	2026-10-16
RF Control Unit	Techy	TR1029-1	10291	2025-10-17	2026-10-16
RF Sensor Unit	Techy	TR1029-2	10292	2025-10-17	2026-10-16
RF shielding box	Yinuoxin Electronics	50*50*50 cm	050505M	2025-10-21	2026-10-20

Band edge emissions (Radiated) Emissions in frequency bands (below 1GHz) Emissions in frequency bands (above 1GHz)					
Test Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Test Software	Frad	EZ_EMC	Version: FA-03A2 RE+	/	/
EMI Receiver	Rohde & Schwarz	ESCI7	101032	2025-10-17	2026-10-16
Signal Analyzer	Rohde & Schwarz	FSQ40	100010	2025-10-17	2026-10-16
Log periodic antenna	Schwarzbeck	VULB 9168	01328	2025-10-18	2026-10-17
Preamplifier (9kHz ~ 6GHz)	Schwarzbeck	BBV9744	00246	2026-05-10	2027-05-09
BELOW-Cable	REBES Talent	9K1G	21101576	2025-08-23	2026-08-22
Horn Antenna	Schwarzbeck	BBHA9120D	2597	2025-10-18	2026-10-17
Preamplifier (1GHz ~ 18GHz)	Schwarzbeck	BBV9718D	00008	2025-10-18	2026-10-17
Preamplifier	TSTPASS	LNA10180G45	TS2215007	2026-05-10	2027-05-09
ABOVE-Cable	REBES Talent	1~18G	21101558	2025-08-23	2026-08-22
Horn Antenna	SCHWARZBECK	BBHA9170	1157	2025-10-18	2026-10-17
Low Noise Pre-amplifier	Sket	LNPA_1840G-50	SK2022032902	2025-10-17	2026-10-16
ABOVE-Cable2	REBES Talent	18~40G	21101686	2025-08-23	2026-08-22
ABOVE-Cable1	REBES Talent	18~40G	21101687	2025-08-23	2026-08-22
Loop Antenna	SCHWARZBECK	FMZB 1519 B	00059	2025-06-25	2027-06-24
Filter	COM-MW	ZBSF6-M2400-248 3.5-2990	08226825	2025-10-18	2026-10-17

4.2 Test Auxiliary Equipment

No.	Description	Manufacturer	Model	Serial Number	Certification
1	USB-C Power Adapter	Apple Inc.	A2166	/	

4.3 Test Modes

No.	Test Modes
TM1	TX-GFSK (Non-Hopping)
TM2	TX-Pi/4DQPSK (Non-Hopping)
TM3	TX-8DPSK (Non-Hopping)
TM4	TX-GFSK (Hopping)
TM5	TX-Pi/4DQPSK (Hopping)
TM6	TX-8DPSK (Hopping)

4.4 Test Channel of EUT

Operation Band: 2400-2483.5 MHz

Bandwidth (MHz)	Lowest Channel (LCH) (MHz)	Middle Channel (MCH) (MHz)	Highest Channel (HCH) (MHz)
1	2402	2441	2480

4.5 Test software

Test software:	Version:	Power Class:
bt_tool_v1.1.2	V1.1.2	6

5 Evaluation Results (Evaluation)

5.1 Antenna requirement


Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
Test Method:	---
Operating Environment:	
Temperature:	24 °C
Humidity:	54 %
Atmospheric Pressure:	100.1 mbar
Test voltage:	DC3.7V From battery

5.1.1 Conclusion

The Bluetooth antenna is an PCB antenna which permanently attached, and the best case gain of the antenna is 1.3dBi. See product internal photos for details.

6 Radio Spectrum Matter Test Results (RF)


6.1 Conducted Emission at AC power line

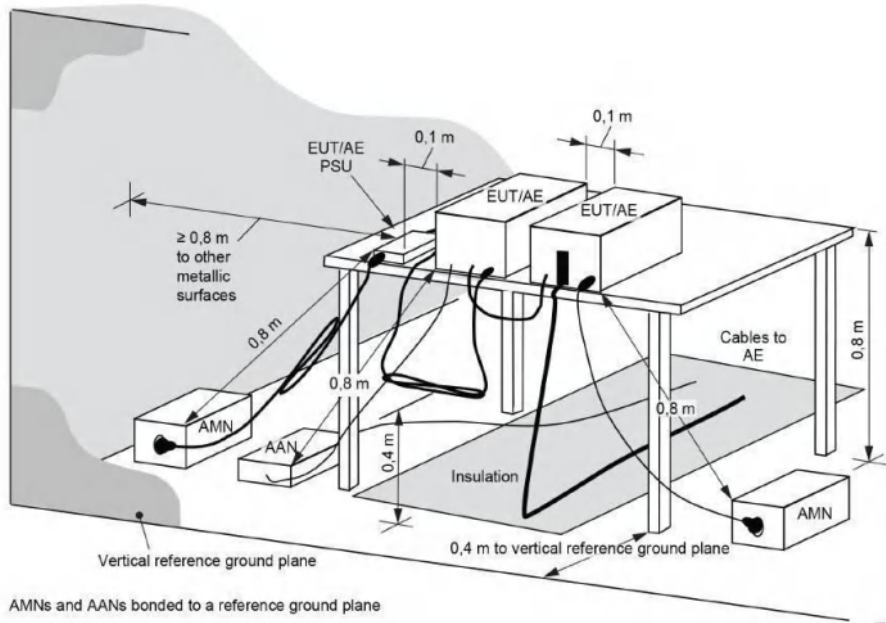Test Requirement:	Refer to 47 CFR 15.207(a), Except as shown in paragraphs (b)and (c)of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).		
Test Method:	ANSI C63.10-2020+C63.10a-2024 section 6.2		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dBμV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
*Decreases with the logarithm of the frequency.			
Procedure:	Refer to ANSI C63.10-2020+C63.10a-2024 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		
Test Setup:			
Operating Environment:			
Temperature:	22.4 °C		
Humidity:	50.9 %		
Atmospheric Pressure:	1010 mbar		
Test voltage:	DC3.7V From battery		

6.1.1 Test Data


Remark: The report only reflects the test data of worst mode TM3.

TM3 / Line: Line / Band: 2400-2483.5 MHz / BW: 1 / CH: L

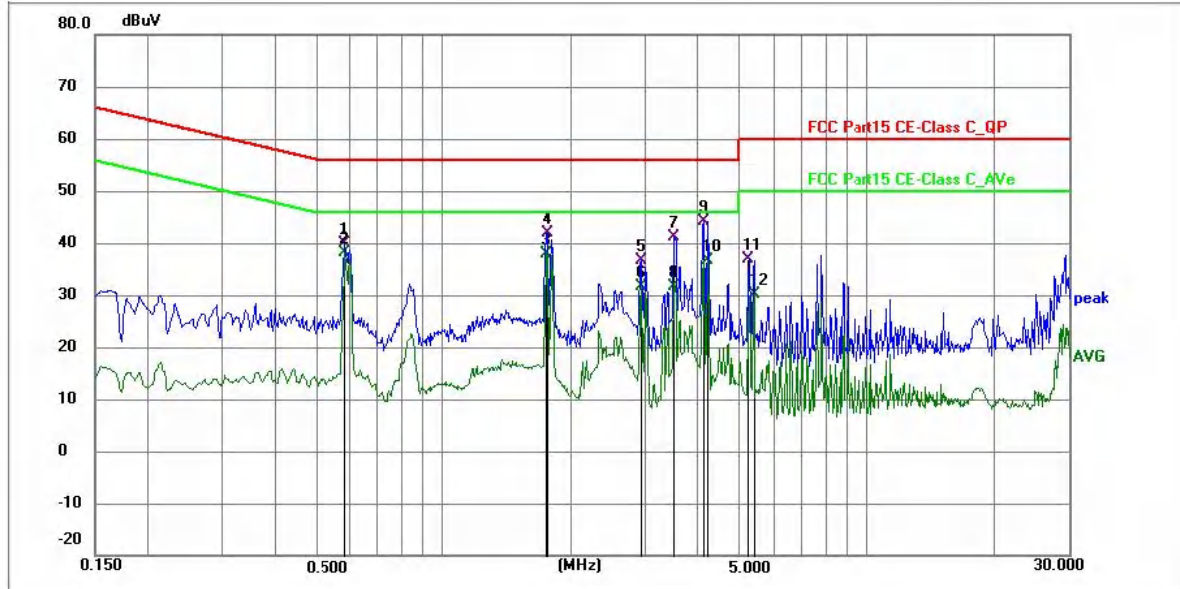

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.5865	29.80	10.13	39.93	56.00	-16.07	QP	P	
2 *	0.5865	28.08	10.13	38.21	46.00	-7.79	AVG	P	
3	1.7520	27.65	10.26	37.91	46.00	-8.09	AVG	P	
4	1.7610	31.69	10.26	41.95	56.00	-14.05	QP	P	
5	2.9174	26.29	10.22	36.51	56.00	-19.49	QP	P	
6	2.9174	21.37	10.22	31.59	46.00	-14.41	AVG	P	
7	3.5070	30.92	10.24	41.16	56.00	-14.84	QP	P	
8	3.5070	21.36	10.24	31.60	46.00	-14.40	AVG	P	
9	4.1144	33.97	10.26	44.23	56.00	-11.77	QP	P	
10	4.1955	26.49	10.26	36.75	46.00	-9.25	AVG	P	
11	5.2619	26.66	10.32	36.98	60.00	-23.02	QP	P	
12	5.3925	19.72	10.34	30.06	50.00	-19.94	AVG	P	

TM3 / Line: Neutral / Band: 2400-2483.5 MHz / BW: 1 / CH: L

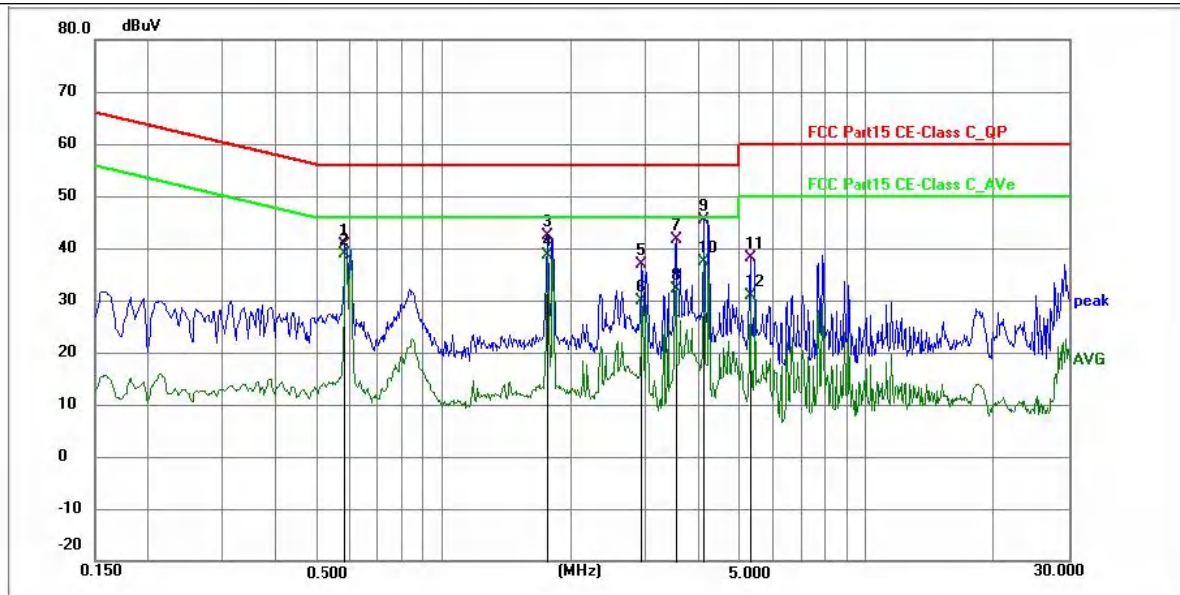


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.5865	30.59	10.14	40.73	56.00	-15.27	QP	P	
2 *	0.5865	28.75	10.14	38.89	46.00	-7.11	AVG	P	
3	1.7655	32.21	10.21	42.42	56.00	-13.58	QP	P	
4	1.7655	28.40	10.21	38.61	46.00	-7.39	AVG	P	
5	2.9355	26.55	10.25	36.80	56.00	-19.20	QP	P	
6	2.9355	19.72	10.25	29.97	46.00	-16.03	AVG	P	
7	3.5295	31.46	10.28	41.74	56.00	-14.26	QP	P	
8	3.5295	21.88	10.28	32.16	46.00	-13.84	AVG	P	
9	4.1145	35.11	10.29	45.40	56.00	-10.60	QP	P	
10	4.1145	26.97	10.29	37.26	46.00	-8.74	AVG	P	
11	5.2935	27.67	10.34	38.01	60.00	-21.99	QP	P	
12	5.2935	20.46	10.34	30.80	50.00	-19.20	AVG	P	

Note:Margin=Level-Limit=Reading+factor-Limit=Reading+LISN+Cable loss-Limit

6.2 20dB Bandwidth


Test Requirement:	47 CFR 15.247(a)(1)
Test Method:	ANSI C63.10-2020+C63.10a-2024, section 7.8.6, For occupied bandwidth measurements, use the procedure in 6.9.2. Frequency hopping shall be disabled for this test. KDB 558074 D01 15.247 Meas Guidance v05r02
Test Limit:	Refer to 47 CFR 15.215(c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
Procedure:	A dBc bandwidth is measured as the width of the spectral envelope of the modulated signal, at an amplitude level reduced from a reference value by a specified ratio (or in decibels, a specified number of dB down from the reference value). Typical ratios, expressed in dB, are -6 dB, -20 dB, and -26 dB, corresponding to 6 dB BW, 20 dB BW, and 26 dB BW, respectively. In this subclause, the ratio is designated by “-xx dB.” The reference value is either the level of the unmodulated carrier or the highest level of the spectral envelope of the modulated signal, as stated by the applicable requirement. Some requirements might specify a specific maximum or minimum value for the “-xx dB” bandwidth; other requirements might specify that the “-xx dB” bandwidth be entirely contained within the authorized or designated frequency band.⁵¹ a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW. b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be at least three times RBW, unless otherwise specified by the applicable requirement. c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.6.2. d) Steps a) through c) might require iteration to adjust within the specified tolerances. e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value. f) Set detection mode to peak and trace mode to max-hold. g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value). h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - xx]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument. i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j). j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The dBc bandwidth is the frequency difference between the two markers.

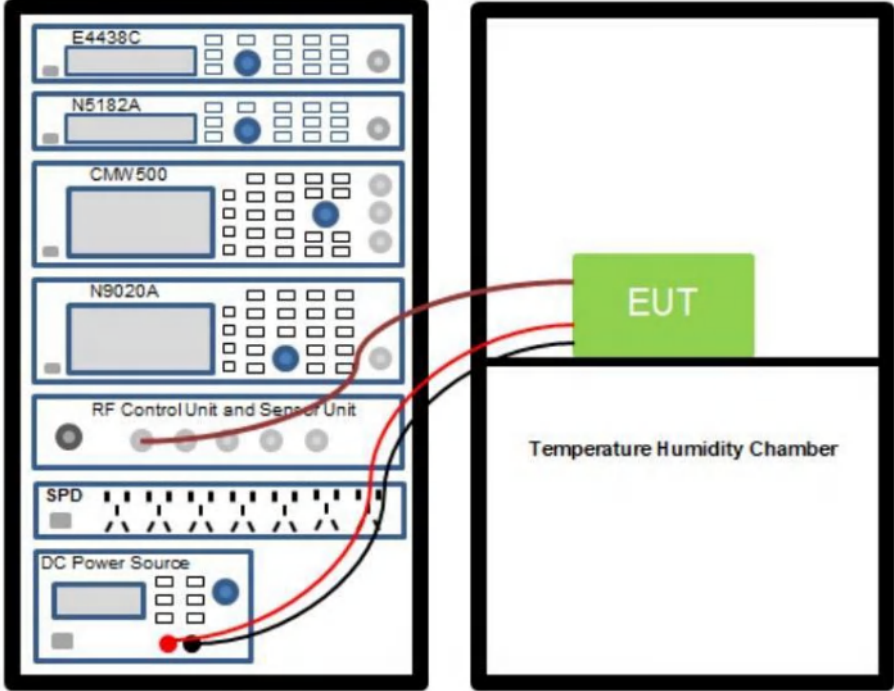	Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth. k) The dBc bandwidth shall be reported by providing spectral plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).
Test Setup:	
Operating Environment:	
Temperature:	24 °C
Humidity:	54 %
Atmospheric Pressure:	100.1 mbar
Test voltage:	DC3.7V From battery

6.2.1 Test Data

Please Refer to Appendix for Details.


6.3 Maximum Conducted Output Power

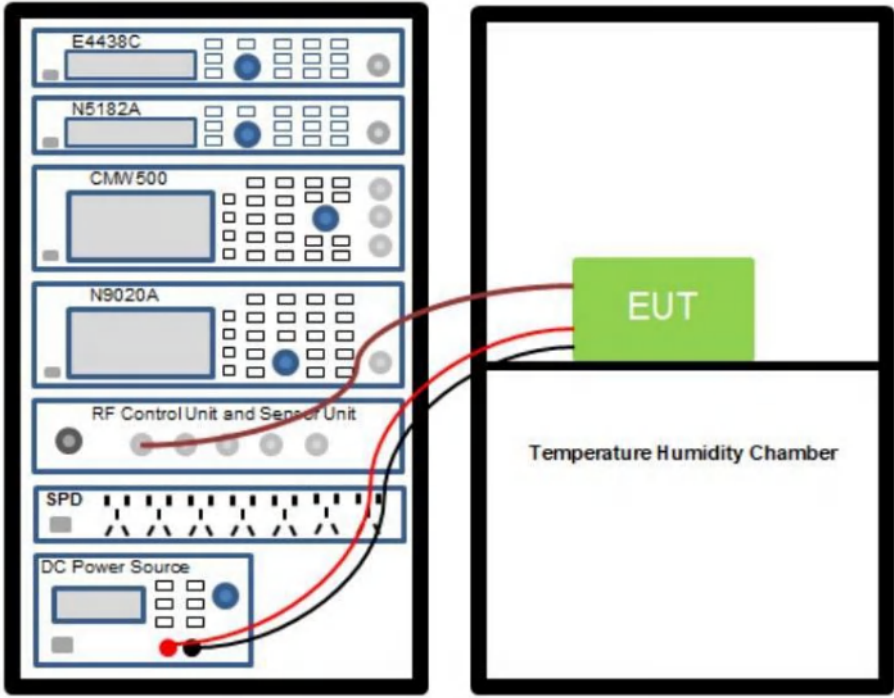Test Requirement:	47 CFR 15.247(b)(1)
Test Method:	ANSI C63.10-2020+C63.10a-2024, section 7.8.5 KDB 558074 D01 15.247 Meas Guidance v05r02
Test Limit:	Refer to 47 CFR 15.247(b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
Test Setup:	
Operating Environment:	
Temperature:	24 °C
Humidity:	54 %
Atmospheric Pressure:	100.1 mbar
Test voltage:	DC3.7V From battery

6.3.1 Test Data

Please Refer to Appendix for Details.

6.4 Channel Separation

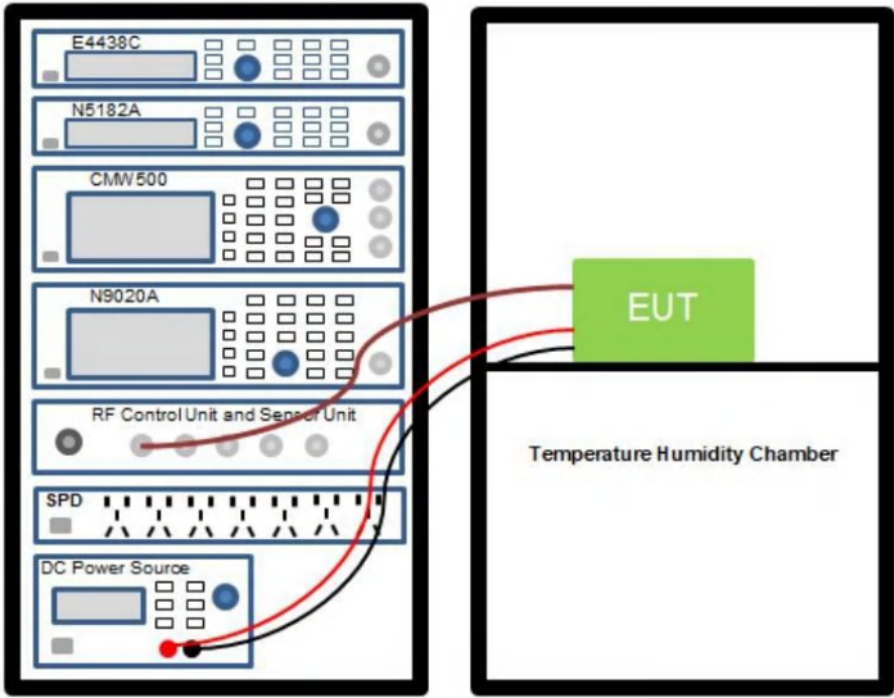
Test Requirement:	47 CFR 15.247(a)(1)
Test Method:	ANSI C63.10-2020+C63.10a-2024, section 7.8.2 KDB 558074 D01 15.247 Meas Guidance v05r02
Test Limit:	Refer to 47 CFR 15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
Procedure:	The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings: a) Span: Wide enough to capture the peaks of two adjacent channels. b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel. c) Video (or average) bandwidth (VBW) $\geq$ RBW. d) Sweep: No faster than coupled (auto) time. e) Detector function: Peak. f) Trace: Max-hold. g) Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A spectral plot of the data shall be included in the test report.
Test Setup:	 The diagram illustrates the test setup. On the left, a rack of test equipment includes an E4438C signal generator, N5182A power meter, CMW500 vector signal analyzer, N9020A spectrum analyzer, an RF Control Unit and Sensor Unit, an SPD (Signal Power Divider), and a DC Power Source. Red and black cables connect the RF Control Unit and Sensor Unit to the EUT (Equipment Under Test), which is placed inside a Temperature Humidity Chamber. The DC Power Source is also connected to the EUT.
Operating Environment:	
Temperature:	24 °C

Humidity:	54 %
Atmospheric Pressure:	100.1 mbar
Test voltage:	DC3.7V From battery

6.4.1 Test Data

Please Refer to Appendix for Details.

6.5 Number of Hopping Frequencies

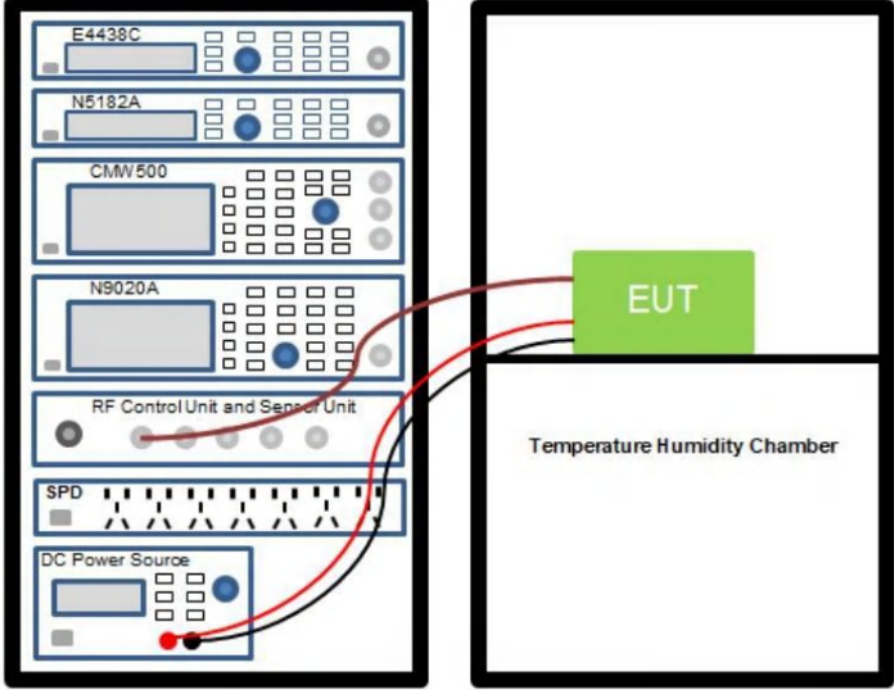
Test Requirement:	47 CFR 15.247(a)(1)(iii)
Test Method:	ANSI C63.10-2020+C63.10a-2024, section 7.8.3 KDB 558074 D01 15.247 Meas Guidance v05r02
Test Limit:	Refer to 47 CFR 15.247(a)(1)(iii), Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Setup:	
Operating Environment:	
Temperature:	24 °C
Humidity:	54 %
Atmospheric Pressure:	100.1 mbar
Test voltage:	DC3.7V From battery

6.5.1 Test Data

Please Refer to Appendix for Details.

6.6 Dwell Time


Test Requirement:	47 CFR 15.247(a)(1)(iii)
Test Method:	ANSI C63.10-2020+C63.10a-2024, section 7.8.4 KDB 558074 D01 15.247 Meas Guidance v05r02
Test Limit:	Refer to 47 CFR 15.247(a)(1)(iii), Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Procedure:	The dwell time per hop on a channel is the time from the start of the first transmission to the end of the last transmission for that hop. If the device has a single transmission per hop then the dwell time is the duration of that transmission. If the device has a multiple transmissions per hop then the dwell time is measured from the start of the first transmission to the end of the last transmission. The time of occupancy is the total time that the device dwells on a channel over an observation period specified in the regulatory requirement. To determine the time of occupancy the spectrum analyzer will be configured to measure both the dwell time per hop and the number of times the device transmits on a specific channel in a given period. The EUT shall have its hopping function enabled. Compliance with the requirements shall be made with the minimum and with the maximum number of channels enabled. If the dwell time per channel does not vary with the number of channels than compliance with the requirements may be based on the minimum number of channels. If the device supports different dwell times per channel (example Bluetooth devices can dwell on a channel for 1, 3 or 5 time slots) then measurements can be limited to the longest dwell time with the minimum number of channels. Use the following spectrum analyzer settings to determine the dwell time per hop: a) Span: Zero span, centered on a hopping channel. b) RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected transmission time per hop. c) Sweep time: Set so that the start of the first transmission and end of the last transmission for the hop are clearly captured. Setting the sweep time to be slightly longer than the hopping period per channel (hopping period = $1/\text{hopping rate}$) should achieve this. d) Use a video trigger, where possible with a trigger delay, so that the start of the transmission is clearly observed. The trigger level might need adjustment to reduce the chance of triggering when the system hops on an adjacent channel. e) Detector function: Peak. f) Trace: Clear-write, single sweep. g) Place markers at the start of the first transmission on the channel and at the end of the last transmission. The dwell time per hop is the time between these two markers. To determine the number of hops on a channel in the regulatory observation period repeat the measurement using a longer sweep time. When the device uses a single hopping sequence the period of measurement should be sufficient to capture at least 2 hops. When the device uses a dynamic hopping sequence, or the sequence varies, the period of measurement may need to capture multiple hops to better determine the average time of occupancy. Count the number of hops on the channel

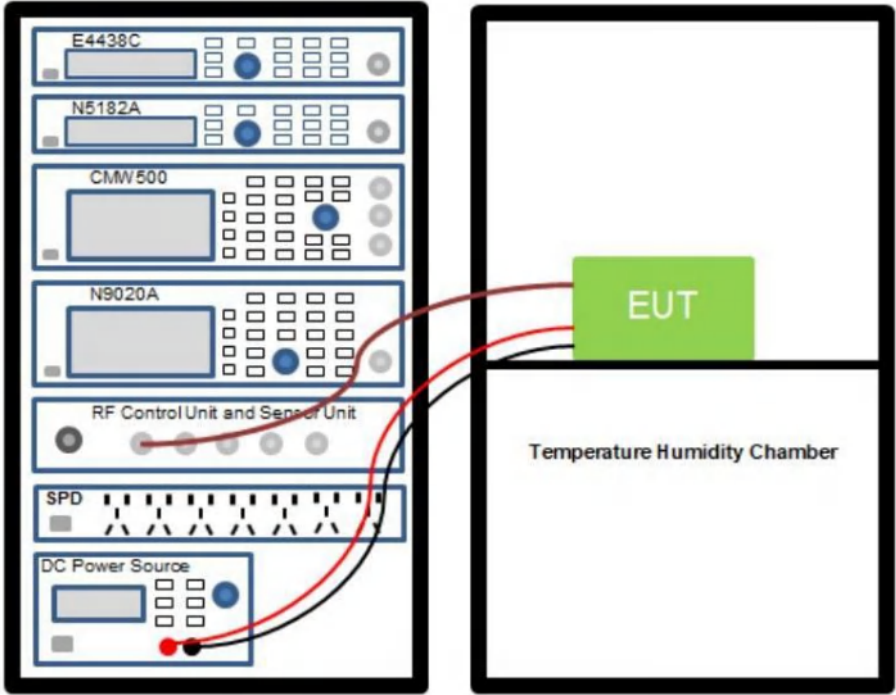	across the sweep time. The average number of hops on the same channel within the regulatory observation period is calculated from the number of hops on the channel divided by the spectrum analyzer sweep time multiplied by the regulatory observation period. For example, if three hops are counted with an analyzer sweep time of 500 ms and the regulatory observation period is 10 s, then the number of hops in that ten seconds is $3 / 0.5 \times 10$, or 60 hops. The average time of occupancy is calculated by multiplying the dwell time per hop by the number of hops in the observation period.
Test Setup:	
Operating Environment:	
Temperature:	24 °C
Humidity:	54 %
Atmospheric Pressure:	100.1 mbar
Test voltage:	DC3.7V From battery

6.6.1 Test Data

Please Refer to Appendix for Details.


6.7 Emissions in non-restricted frequency bands

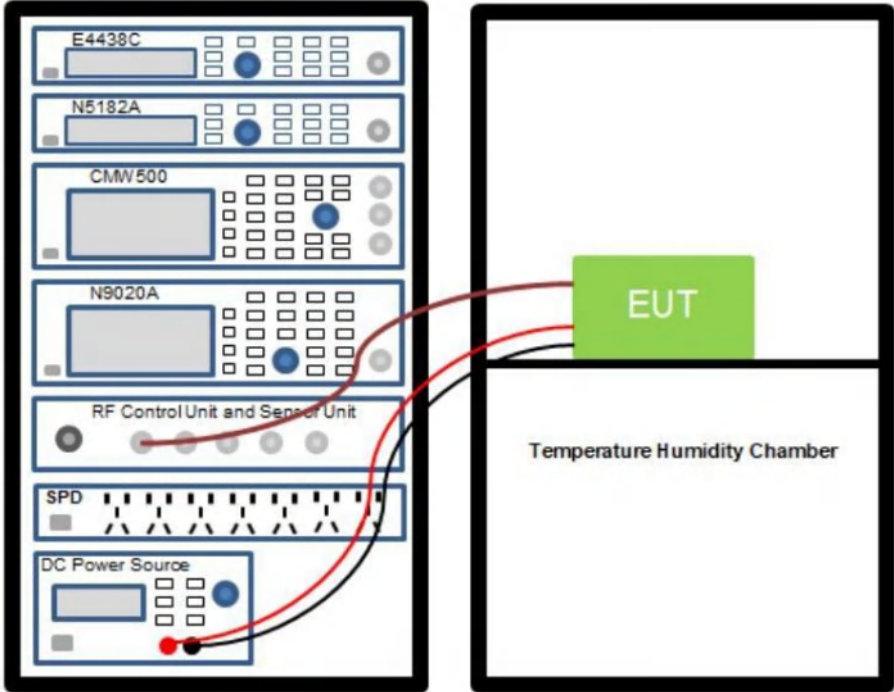Test Requirement:	47 CFR 15.247(d)
Test Method:	ANSI C63.10-2020+C63.10a-2024 section 7.8.7 KDB 558074 D01 15.247 Meas Guidance v05r02
Test Limit:	Refer to 47 CFR 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Setup:	
Operating Environment:	
Temperature:	24 °C
Humidity:	54 %
Atmospheric Pressure:	100.1 mbar
Test voltage:	DC3.7V From battery

6.7.1 Test Data

Please Refer to Appendix for Details.

6.8 Band edge emissions (Radiated)

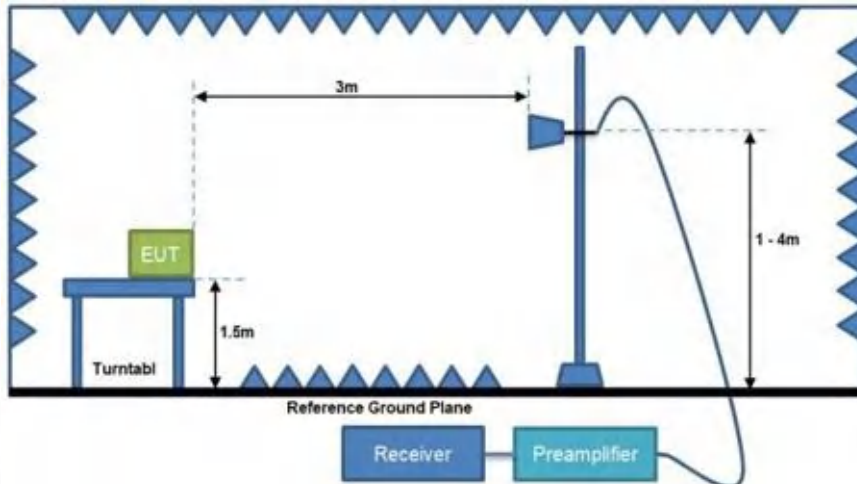Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Method:	ANSI C63.10-2020+C63.10a-2024 section 6.10 KDB 558074 D01 15.247 Meas Guidance v05r02		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.		
Procedure:	ANSI C63.10-2020+C63.10a-2024 section 6.10.5.2		
Test Setup:			
Operating Environment:			
Temperature:	24 °C		
Humidity:	54 %		
Atmospheric Pressure:	100.1 mbar		
Test voltage:	DC3.7V From battery		


6.8.1 Test Data


Remark: The report only reflects the test data of worst mode TM3.

Test Channel: Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
2310.00	48.52	3.85	52.37	74.00	-21.63	Peak	Pass
2310.00	38.88	3.85	42.73	54.00	-11.27	AVG	Pass
2390.00	48.14	3.91	52.05	74.00	-21.95	Peak	Pass
2390.00	37.63	3.91	41.55	54.00	-12.45	AVG	Pass
Test Channel: Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
2310.00	49.78	3.85	53.63	74.00	-20.37	Peak	Pass
2310.00	39.08	3.85	42.93	54.00	-11.07	AVG	Pass
2390.00	48.14	3.91	52.05	74.00	-21.95	Peak	Pass
2390.00	37.55	3.91	41.46	54.00	-12.54	AVG	Pass
Test Channel: Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
2483.50	50.46	3.99	54.45	74.00	-19.55	Peak	Pass
2483.50	40.82	3.99	44.81	54.00	-9.19	AVG	Pass
2500.00	51.03	4.00	55.03	74.00	-18.97	Peak	Pass
2500.00	40.62	4.00	44.62	54.00	-9.38	AVG	Pass
Test Channel: Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
2483.50	48.81	3.99	52.80	74.00	-21.20	Peak	Pass
2483.50	37.91	3.99	41.90	54.00	-12.10	AVG	Pass
2500.00	51.39	4.00	55.39	74.00	-18.61	Peak	Pass
2500.00	41.52	4.00	45.52	54.00	-8.48	AVG	Pass

Note:Margin=Level-Limit=Reading+factor-Limit=Reading+Antenna factor+ cable loss -Limit

6.9 Emissions in frequency bands (below 1GHz)

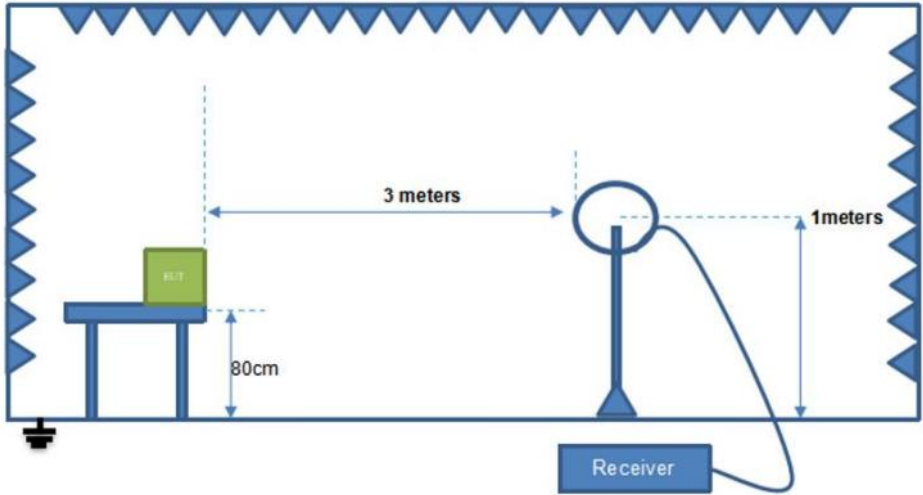Test Requirement:	Refer to 47 CFR 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Method:	ANSI C63.10-2020+C63.10a-2024 section 6.5.4 KDB 558074 D01 15.247 Meas Guidance v05r02		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.		
Procedure:	ANSI C63.10-2020+C63.10a-2024 section 6.5.4		
Test Setup:			

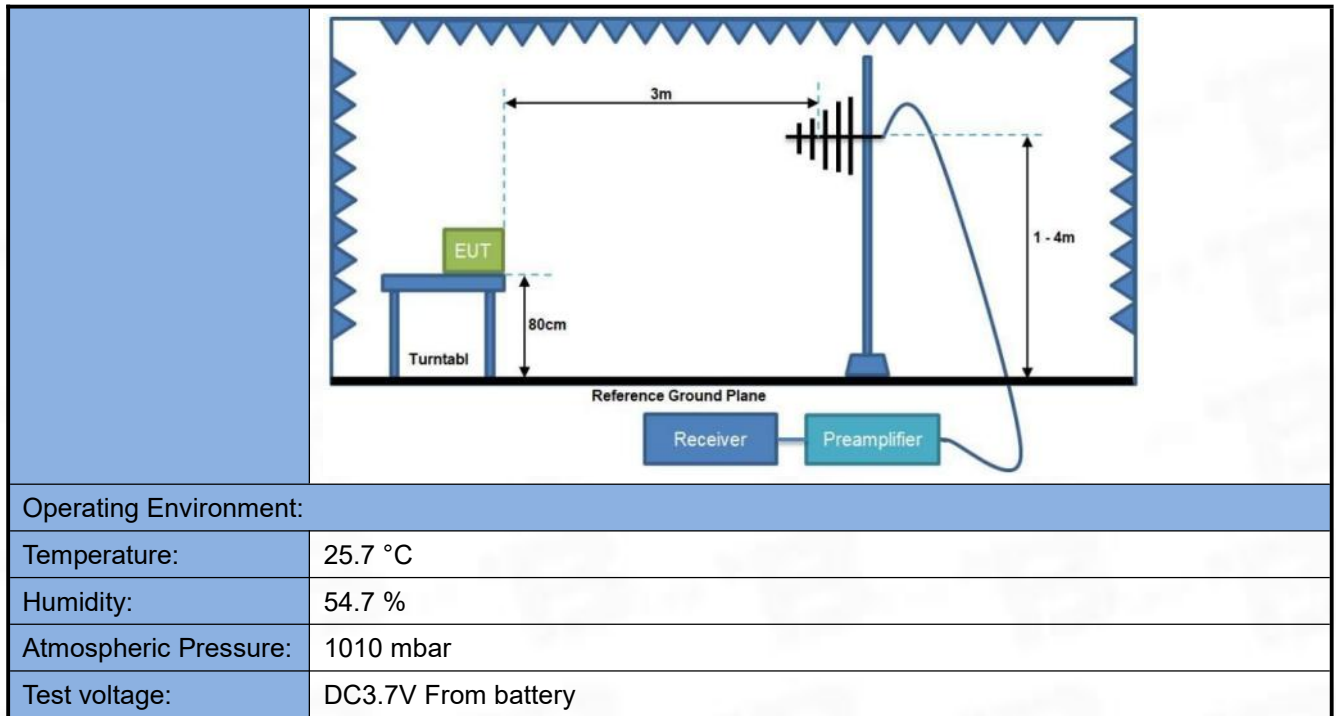

6.9.1 Test Data

Remark: The report only reflects the test data of worst mode (TM3)
(9KHz-30 MHz)


Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})(\text{dB})$;


Limit line = specific limits (dBuV) + distance extrapolation factor.

TM3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 1 / CH: L

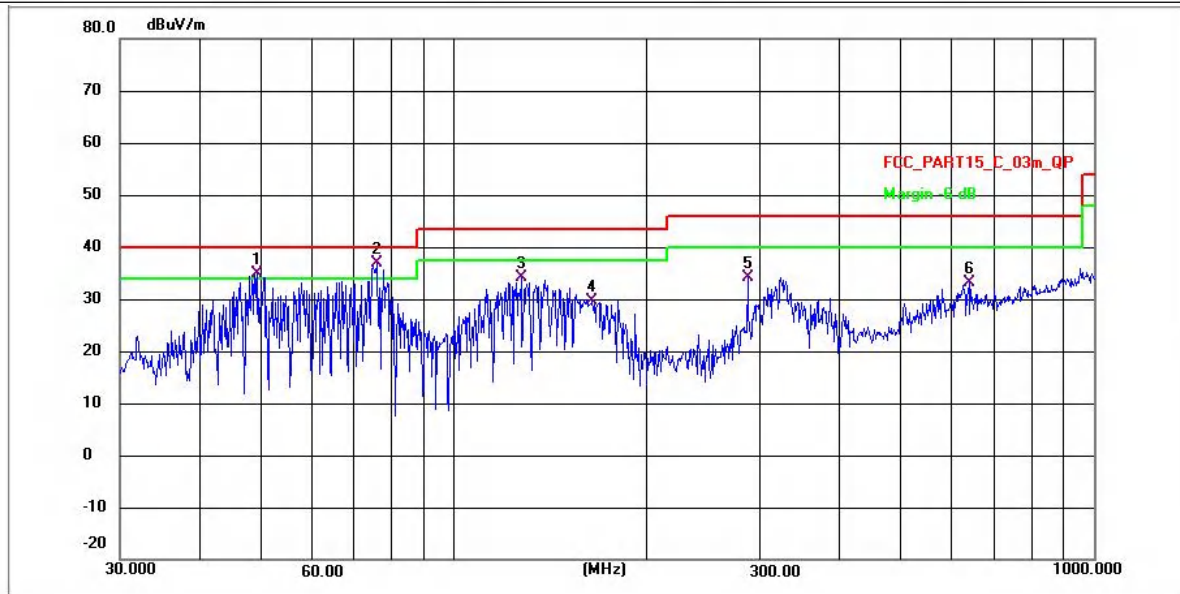

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 !	49.1865	44.27	-9.41	34.86	40.00	-5.14	QP	P
2 *	75.7112	46.07	-9.18	36.89	40.00	-3.11	QP	P
3	127.2176	61.49	-27.46	34.03	43.50	-9.47	QP	P
4	164.3300	56.63	-27.01	29.62	43.50	-13.88	QP	P
5	286.9823	59.98	-25.74	34.24	46.00	-11.76	QP	P
6	638.3686	55.78	-22.75	33.03	46.00	-12.97	QP	P


TM3 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 1 / CH: L

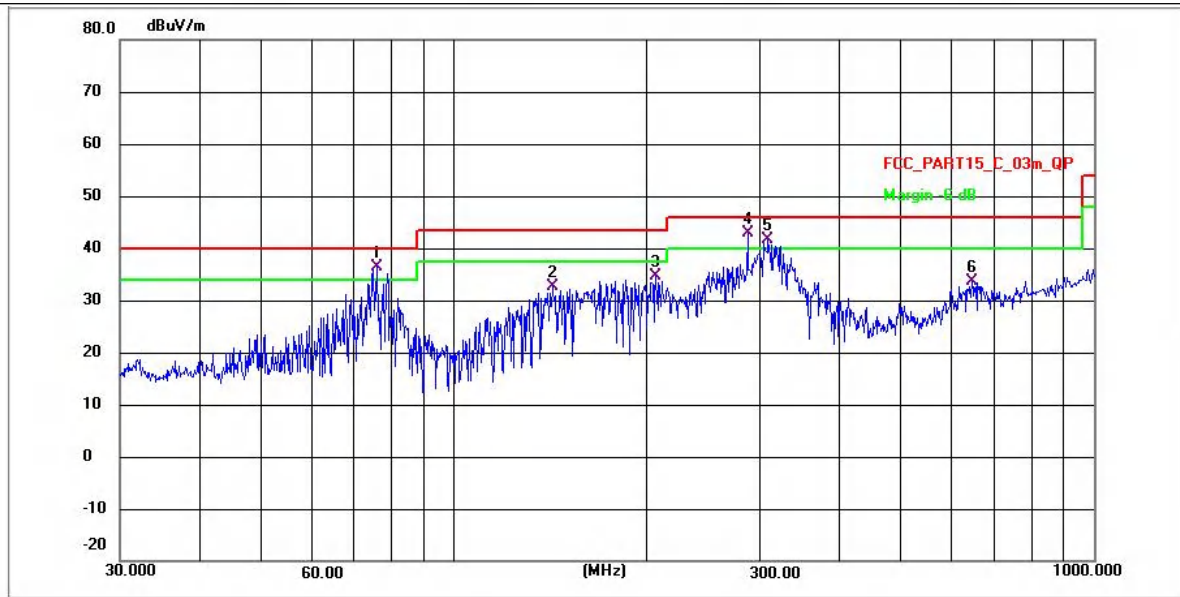

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F
1 !	75.9771	45.54	-9.18	36.36	40.00	-3.64	QP	P
2	142.3242	59.88	-27.26	32.62	43.50	-10.88	QP	P
3	206.3975	61.28	-26.53	34.75	43.50	-8.75	QP	P
4 *	286.9823	68.53	-25.74	42.79	46.00	-3.21	QP	P
5 !	308.9125	67.16	-25.53	41.63	46.00	-4.37	QP	P
6	645.1194	56.23	-22.70	33.53	46.00	-12.47	QP	P

Note:Margin=Level-Limit=Reading+factor-Limit=Reading+Antenna factor+ cable loss -amplifier gain-Limit

6.10 Emissions in frequency bands (above 1GHz)

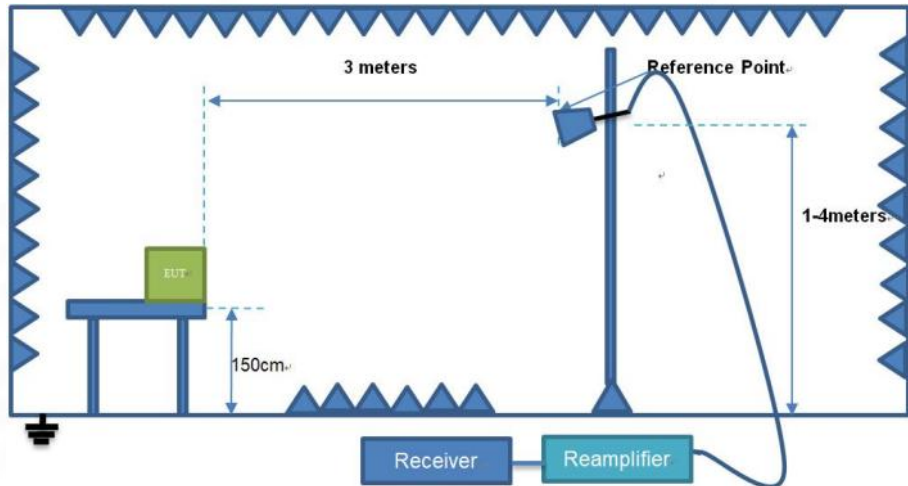Test Requirement:	Refer to 47 CFR 15.247(d), in addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Method:	KDB 558074 D01 15.247 Meas Guidance v05r02		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
	** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241. In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.		
Test Setup:			
Operating Environment:			
Temperature:	22.3 °C		
Humidity:	52.6 %		
Atmospheric Pressure:	1010 mbar		
Test voltage:	DC3.7V From battery		

6.10.1 Test Data

Remark: The report only reflects the test data of worst mode TM3.

Test Channel: Lowest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
4804.00	69.64	-50.08	19.57	74.00	-54.43	Peak	Pass
4804.00	58.94	-50.08	8.87	54.00	-45.13	AVG	Pass
7206.00	60.38	-49.53	10.85	74.00	-63.15	Peak	Pass
7206.00	50.01	-49.53	0.48	54.00	-53.52	AVG	Pass
Test Channel: Lowest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
4804.00	58.94	-49.21	9.73	74.00	-64.27	Peak	Pass
4804.00	49.04	-49.21	-0.18	54.00	-54.18	AVG	Pass
7206.00	68.83	-49.37	19.46	74.00	-54.54	Peak	Pass
7206.00	59.31	-49.37	9.94	54.00	-44.06	AVG	Pass
Test Channel: Middle channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
4882.00	62.05	-48.89	13.17	74.00	-60.83	Peak	Pass
4882.00	51.90	-48.89	3.01	54.00	-50.99	AVG	Pass
7323.00	75.82	-46.74	29.08	74.00	-44.92	Peak	Pass
7323.00	66.01	-46.74	19.27	54.00	-34.73	AVG	Pass
Test Channel: Middle channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Marging (dB)	Detector	Result
4882.00	60.34	-49.94	10.40	74.00	-63.60	Peak	Pass
4882.00	50.24	-49.94	0.30	54.00	-53.70	AVG	Pass
7323.00	60.74	-49.51	11.23	74.00	-62.77	Peak	Pass
7323.00	50.95	-49.51	1.44	54.00	-52.56	AVG	Pass

Test Channel: Highest channel, Test Polarization: Vertical							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4960.00	57.45	-49.28	8.17	74.00	-65.83	Peak	Pass
4960.00	47.05	-49.28	-2.23	54.00	-56.23	AVG	Pass
7440.00	65.38	-49.38	16.00	74.00	-58.00	Peak	Pass
7440.00	55.12	-49.38	5.75	54.00	-48.25	AVG	Pass
Test Channel: Highest channel, Test Polarization: Horizontal							
Frequency (MHz)	Reading (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Marging (dB)	Detector	Result
4960.00	76.69	-48.89	27.80	74.00	-46.20	Peak	Pass
4960.00	66.10	-48.89	17.21	54.00	-36.79	AVG	Pass
7440.00	75.26	-46.74	28.52	74.00	-45.48	Peak	Pass
7440.00	64.66	-46.74	17.92	54.00	-36.08	AVG	Pass

Note:Margin=Level-Limit=Reading+factor-Limit=Reading+Antenna factor+ cable loss -amplifier gain-Limit

7 Test Setup Photos

Refer to Appendix - Test Setup Photos

8 EUT Constructional Details (EUT Photos)

Refer to Appendix - EUT External Photo and Appendix - EUT Internal Photo

9 Appendix

1. Bandwidth

1.1 Test Result

1.1.1 OBW


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.955	/	Pass
		2441	DH5	1	0.974	/	Pass
		2480	DH5	1	0.985	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.218	/	Pass
		2441	2DH5	1	1.234	/	Pass
		2480	2DH5	1	1.244	/	Pass
8DPSK	SISO	2402	3DH5	1	1.220	/	Pass
		2441	3DH5	1	1.224	/	Pass
		2480	3DH5	1	1.221	/	Pass

1.1.2 20dB BW


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	1.116	/	Pass
		2441	DH5	1	1.146	/	Pass
		2480	DH5	1	1.146	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.410	/	Pass
		2441	2DH5	1	1.427	/	Pass
		2480	2DH5	1	1.423	/	Pass
8DPSK	SISO	2402	3DH5	1	1.414	/	Pass
		2441	3DH5	1	1.422	/	Pass
		2480	3DH5	1	1.413	/	Pass

1.2 Test Graph


1.2.1 OBW

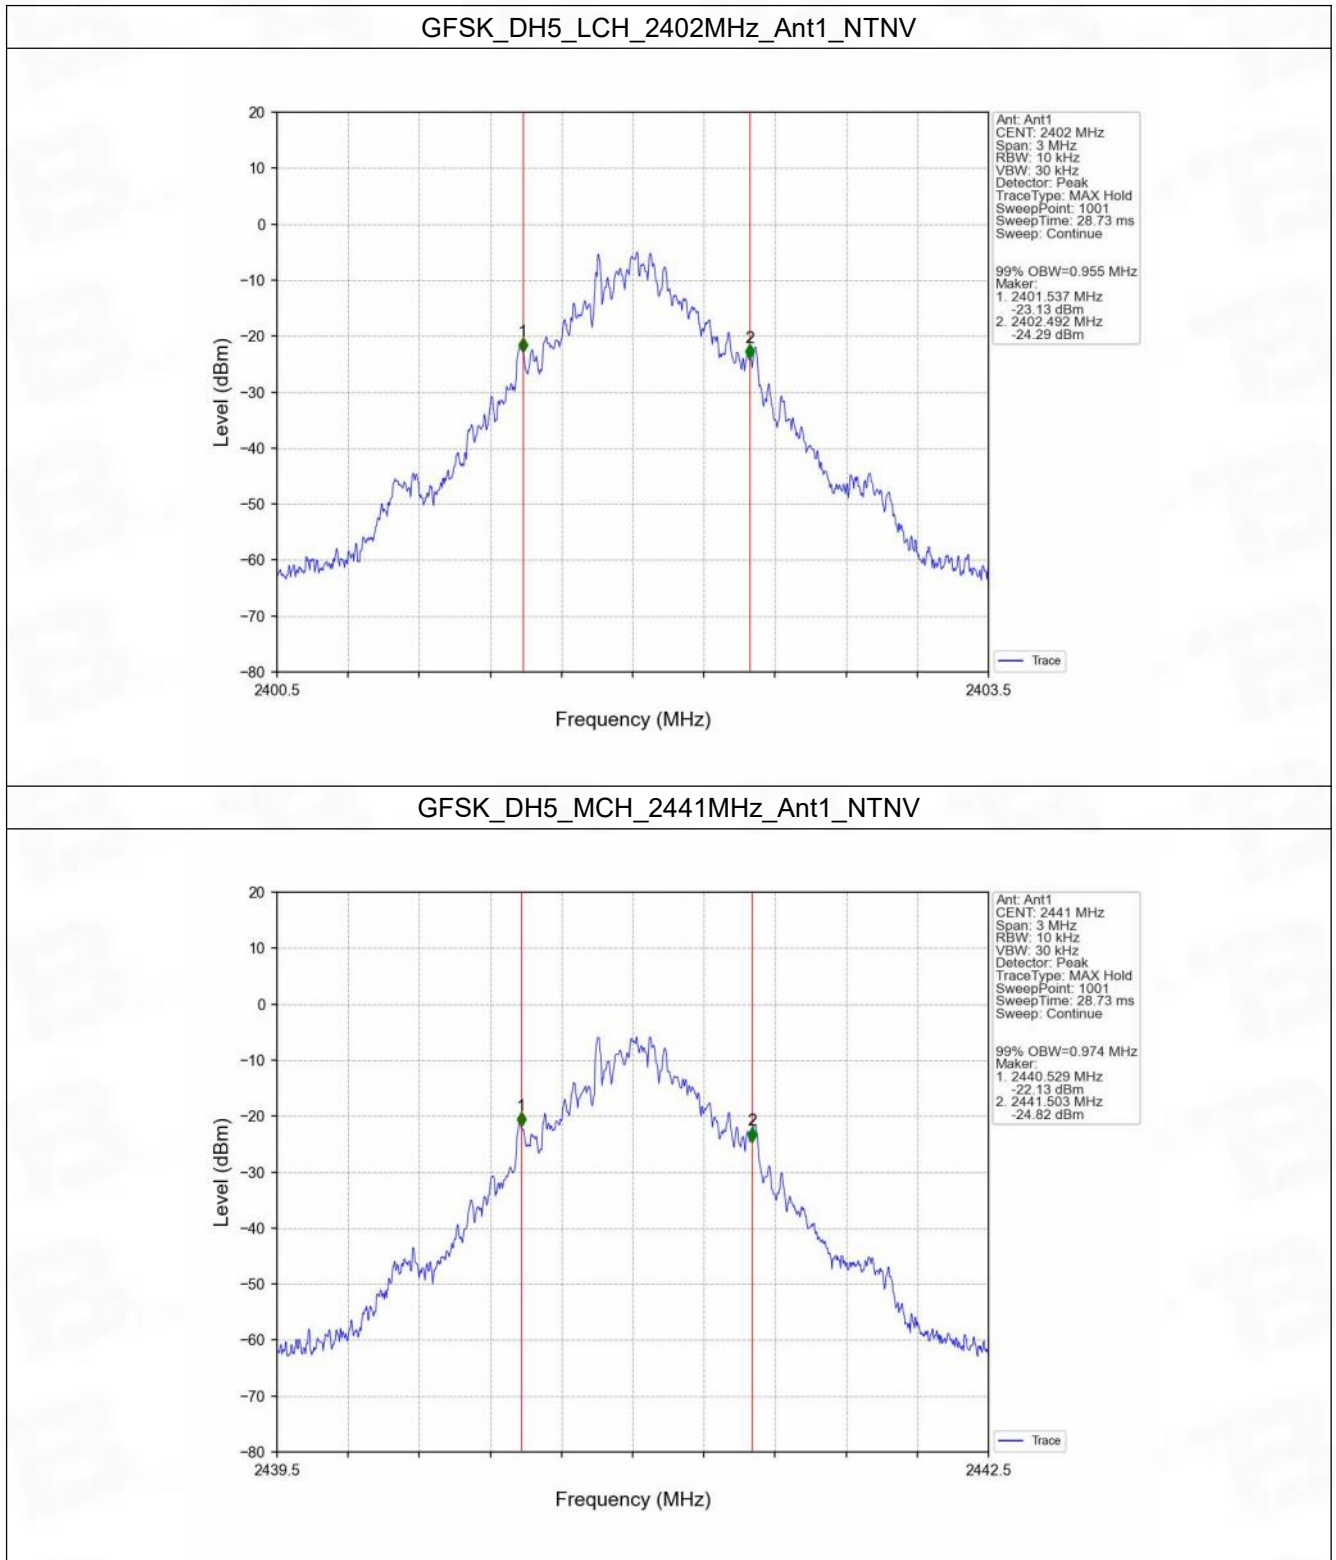


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

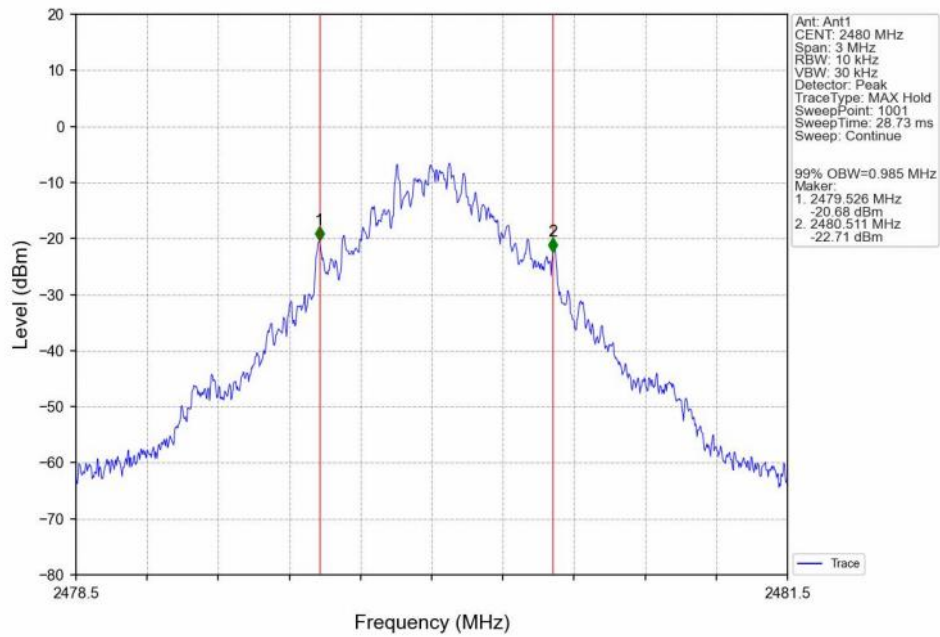


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

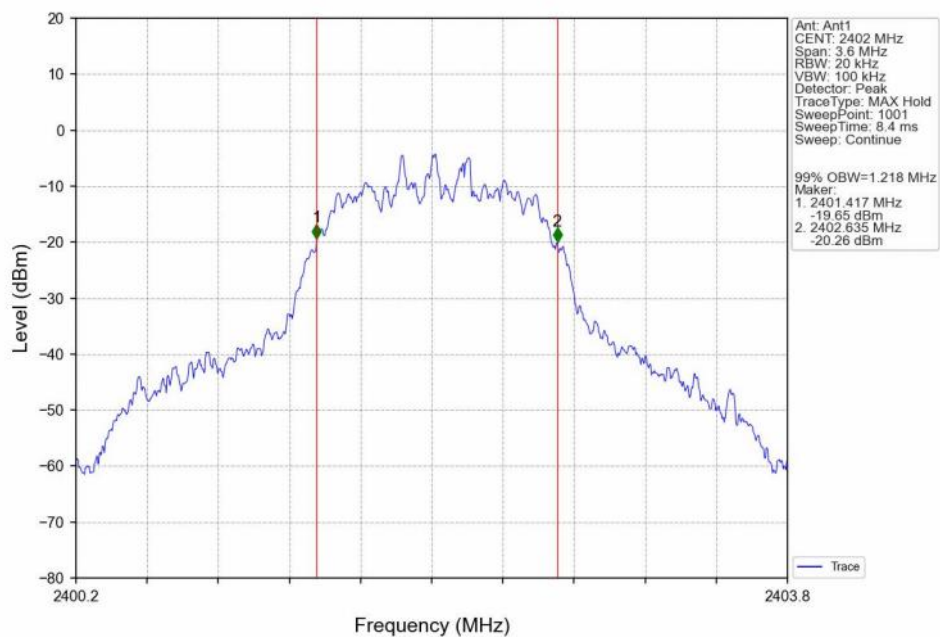


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

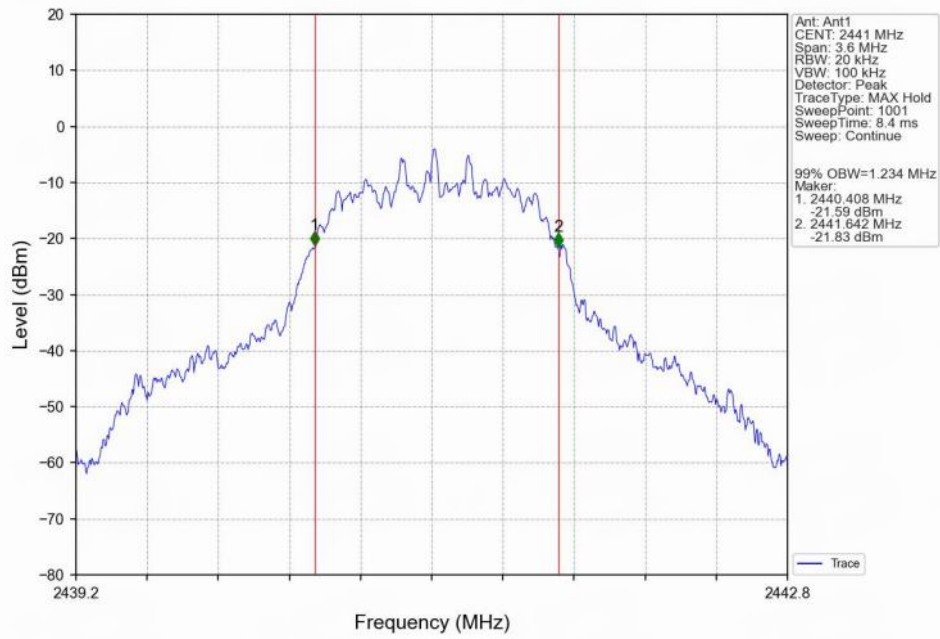


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

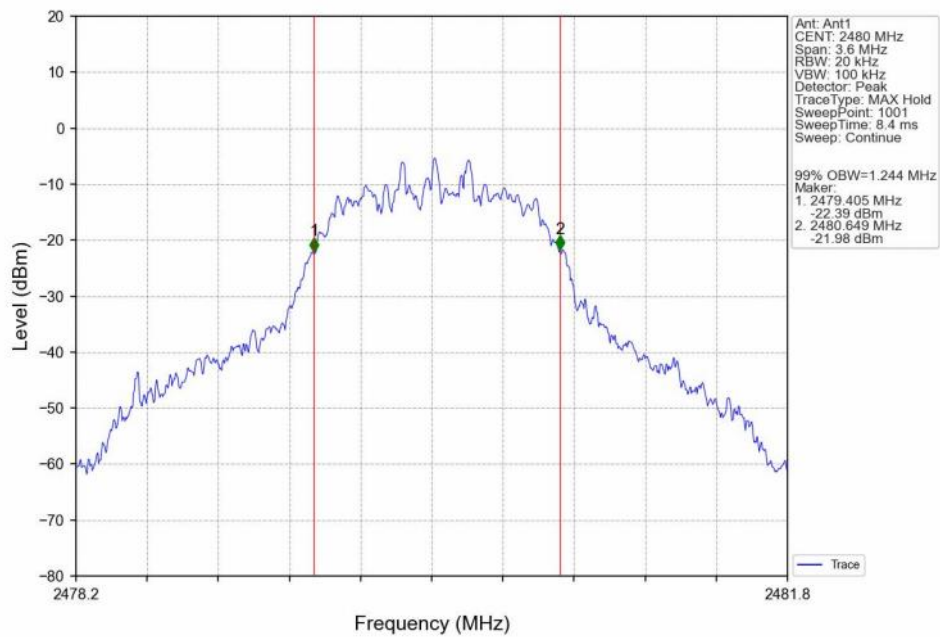


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

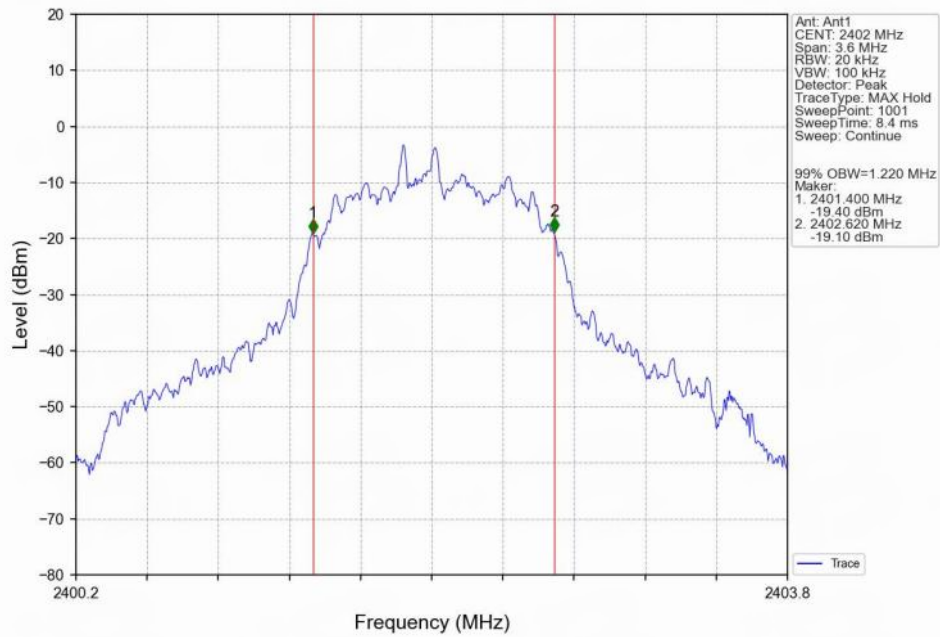

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

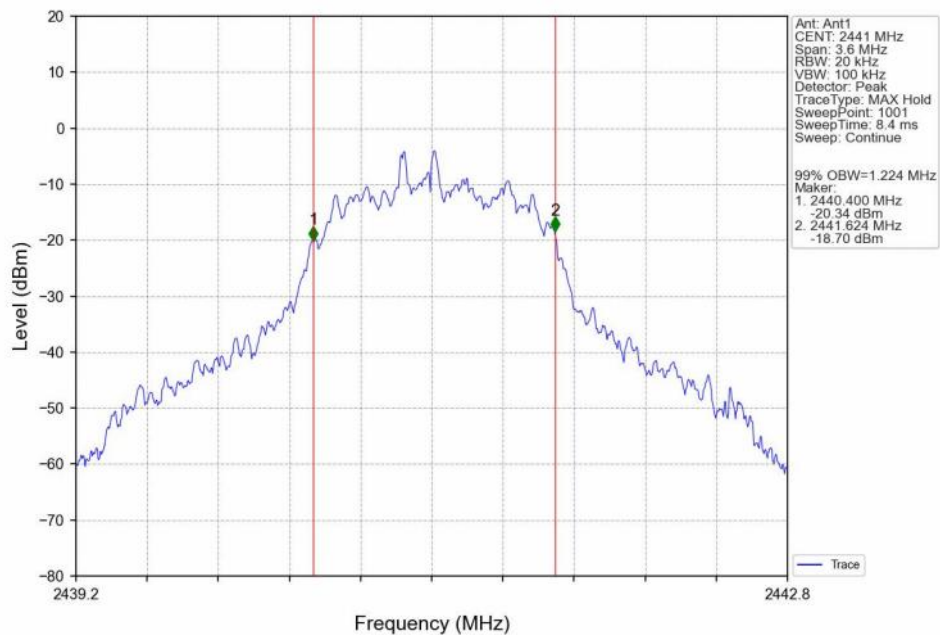


8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

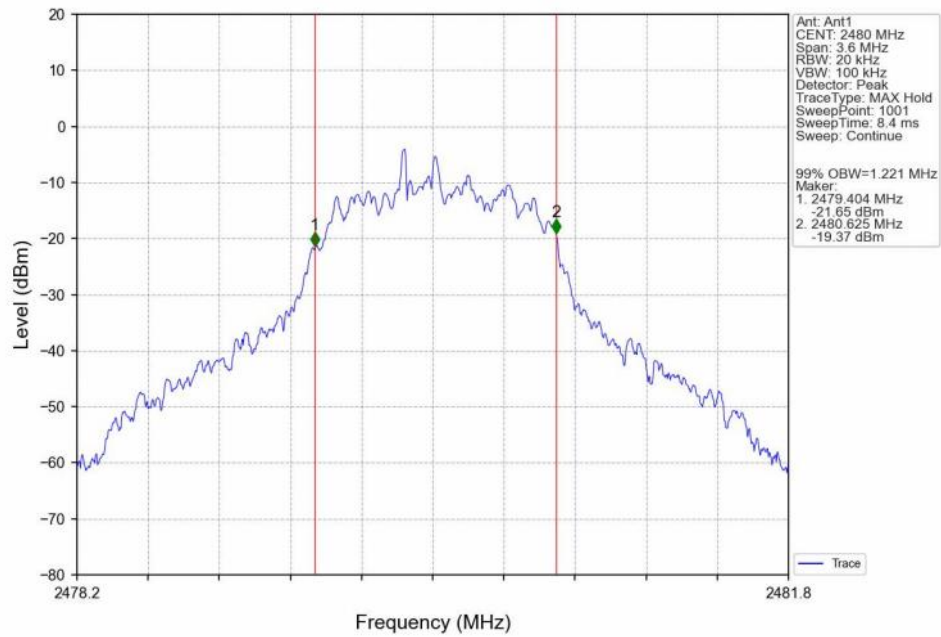


1.2.2 20dB BW


GFSK_DH5_LCH_2402MHz_Ant1_NTNV

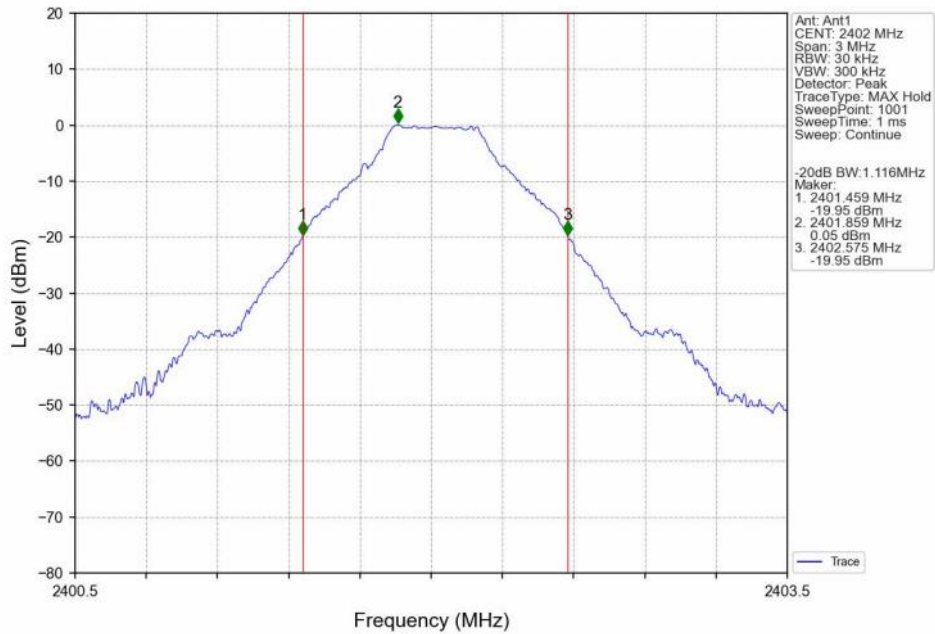


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

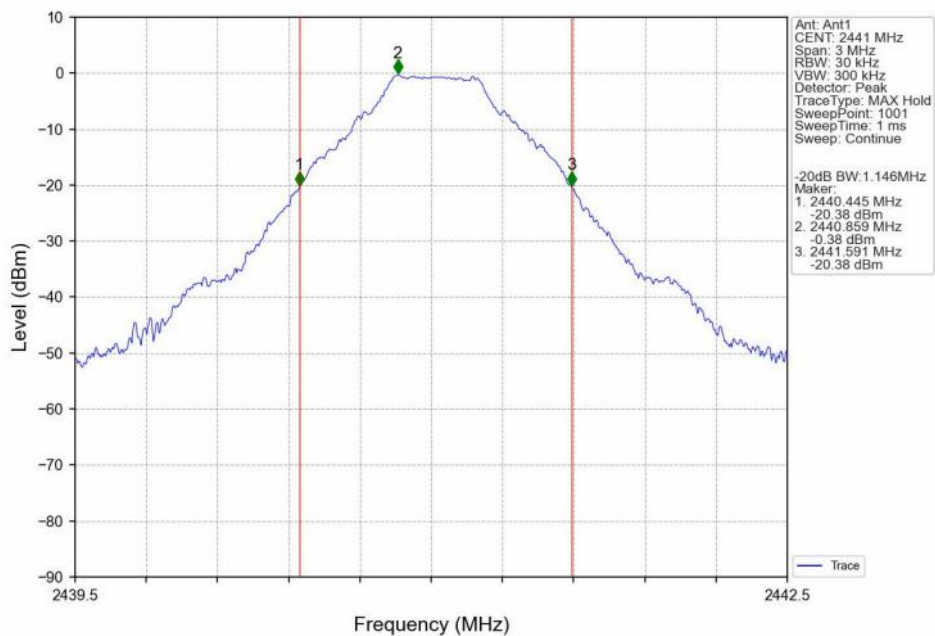


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

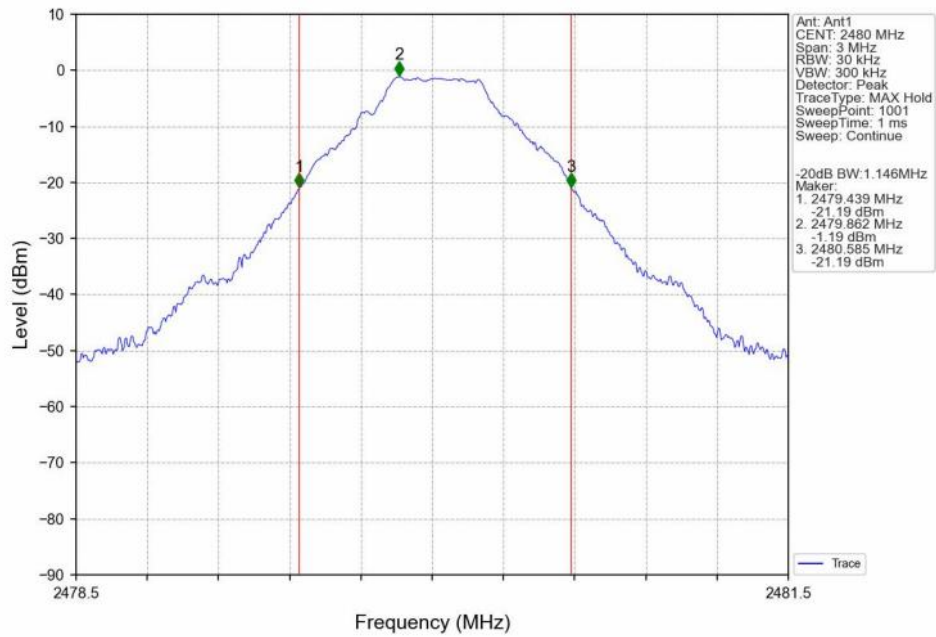


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

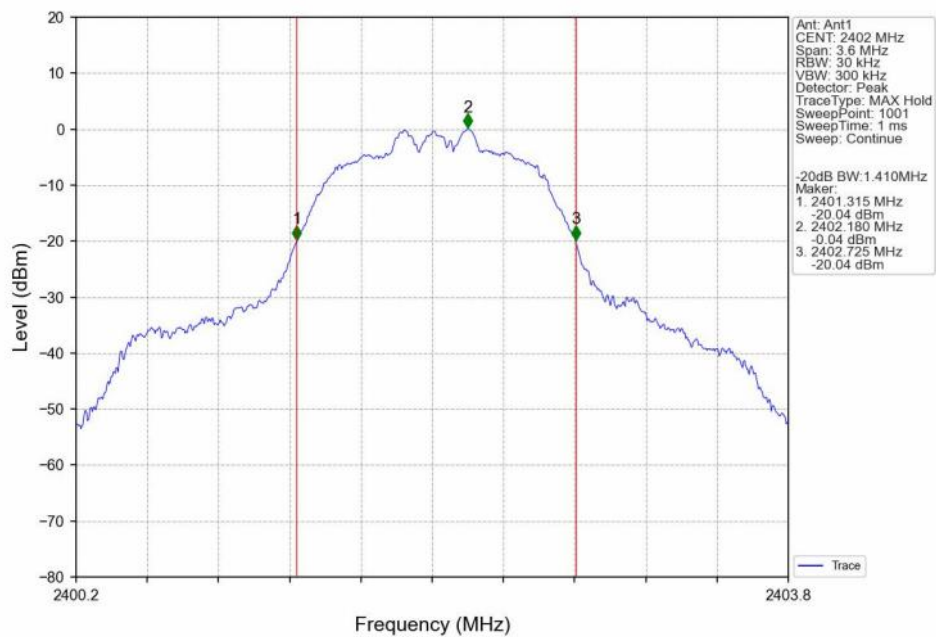


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

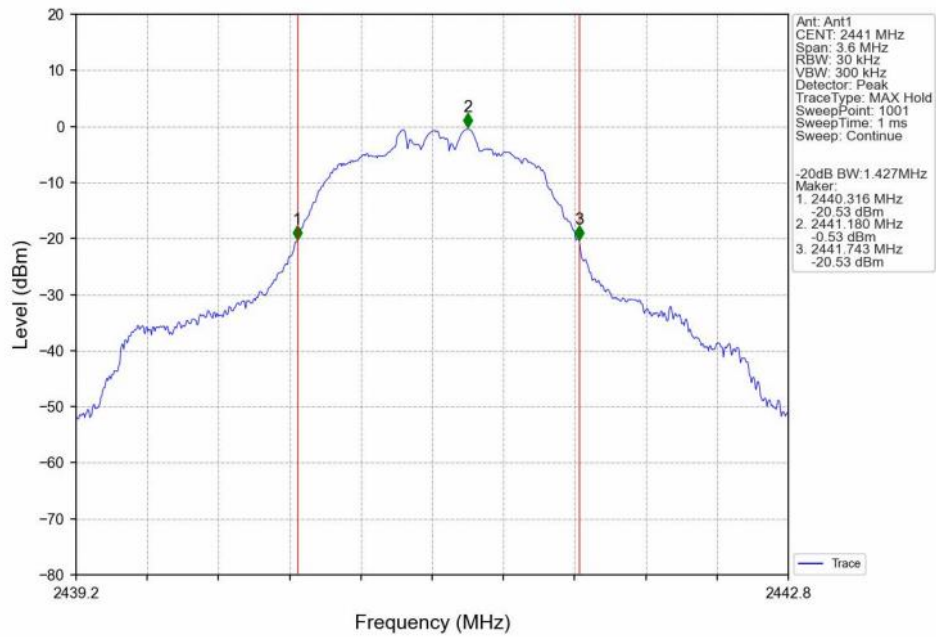


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

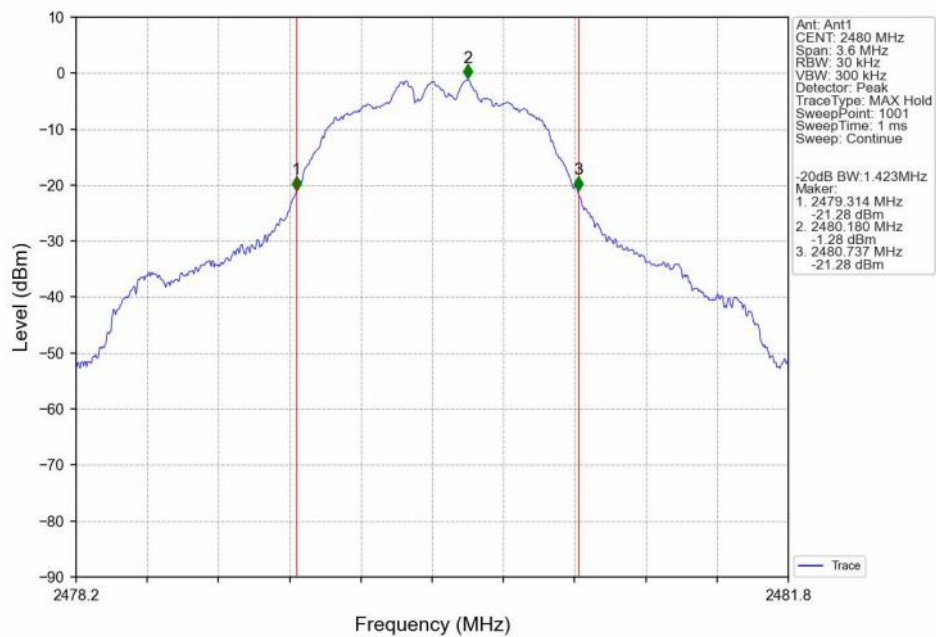


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

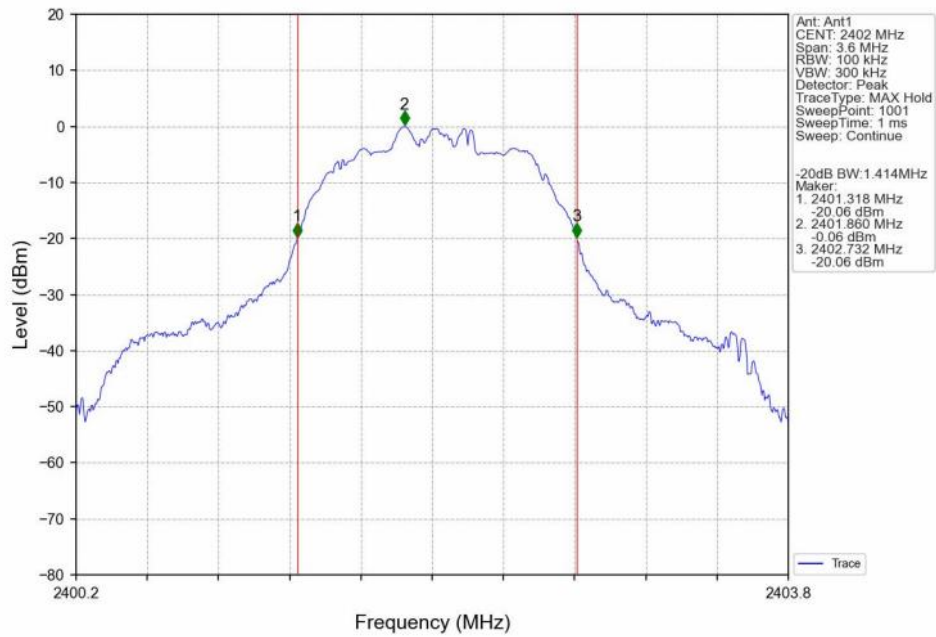

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

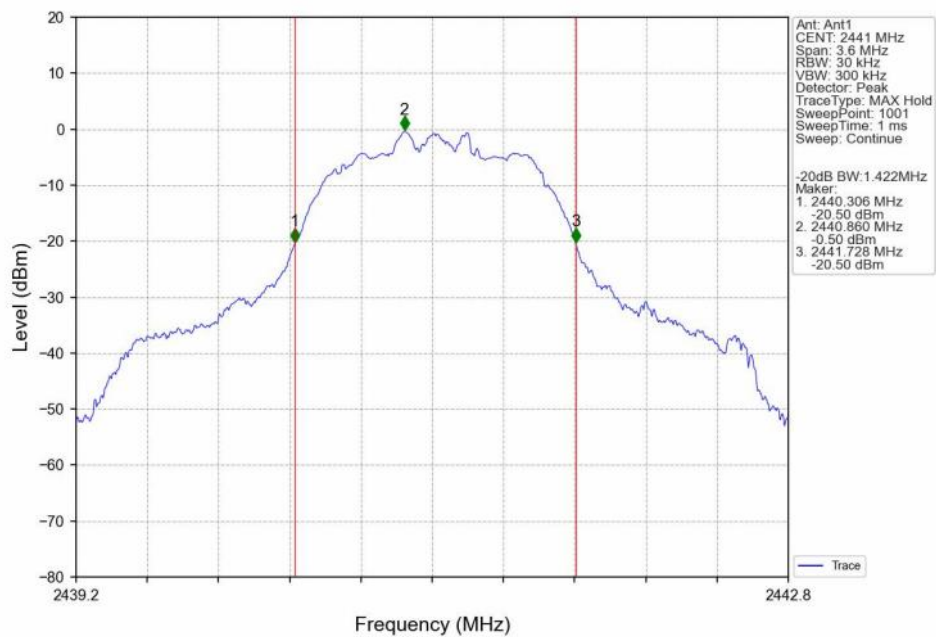

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

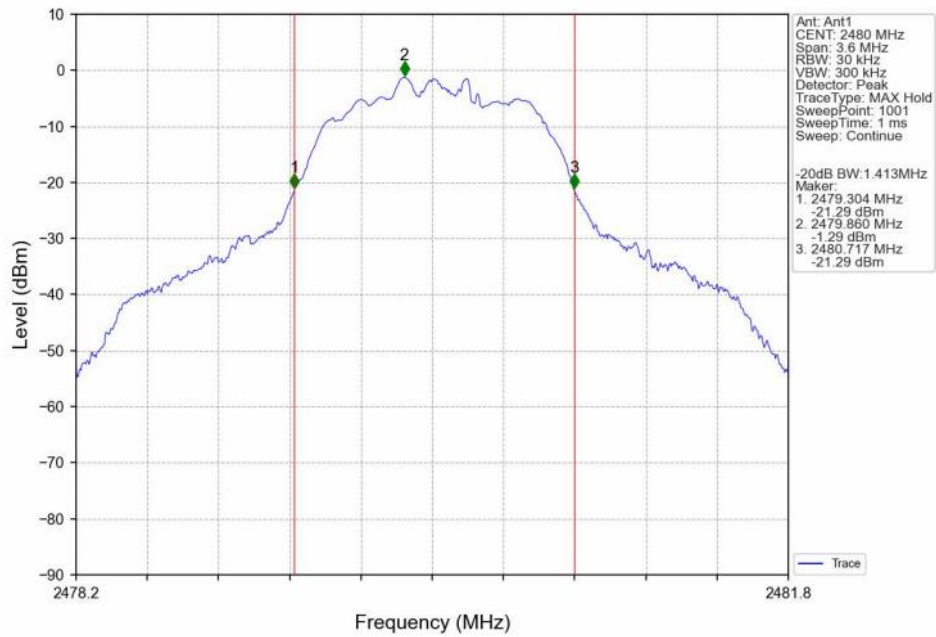

2. Maximum Conducted Output Power

2.1 Test Result


2.1.1 Power

Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	0.36	≤ 20.97	Pass
		2441	DH5	-0.01	≤ 20.97	Pass
		2480	DH5	-0.77	≤ 20.97	Pass
Pi/4DQPSK	SISO	2402	2DH5	1.06	≤ 20.97	Pass
		2441	2DH5	0.70	≤ 20.97	Pass
		2480	2DH5	-0.05	≤ 20.97	Pass
8DPSK	SISO	2402	3DH5	1.29	≤ 20.97	Pass
		2441	3DH5	0.93	≤ 20.97	Pass
		2480	3DH5	0.19	≤ 20.97	Pass


Note1: Antenna Gain: Ant1: 1.30dBi;

2.2 Test Graph


2.2.1 Power

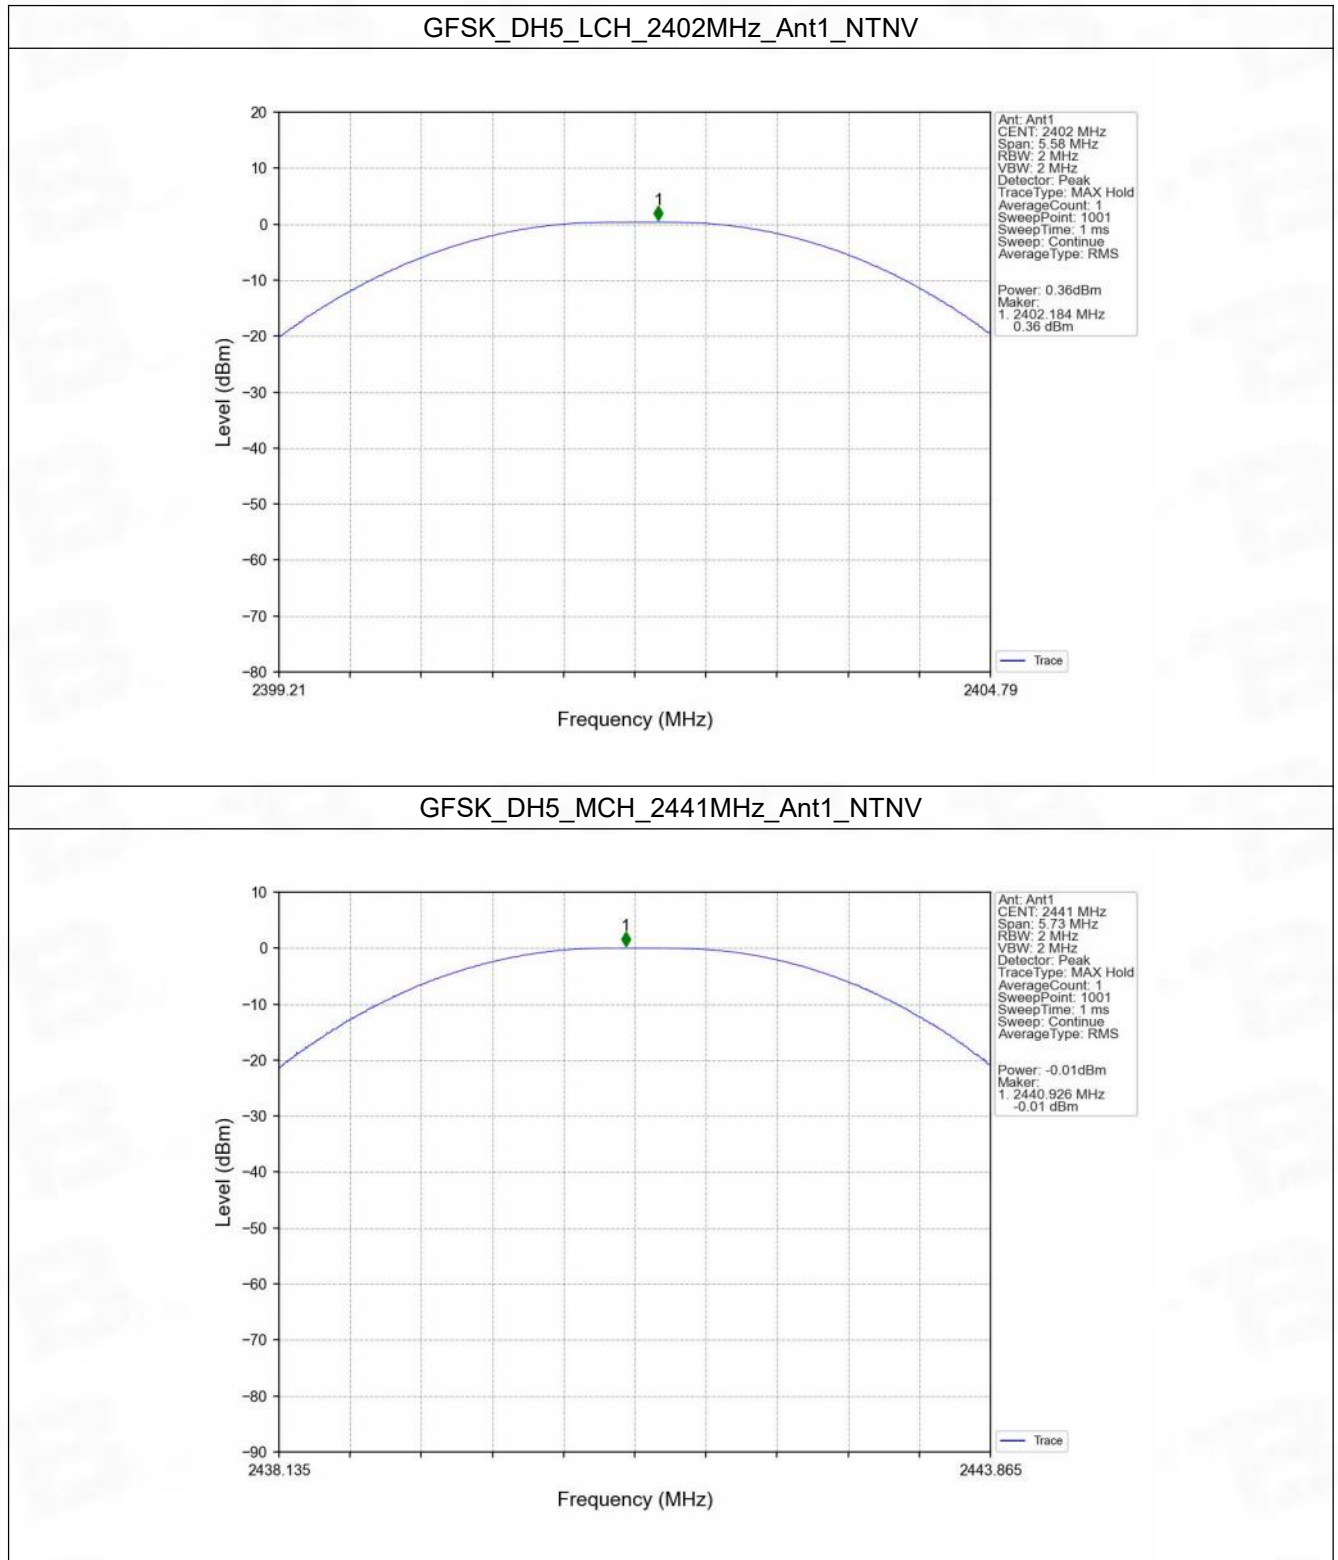


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

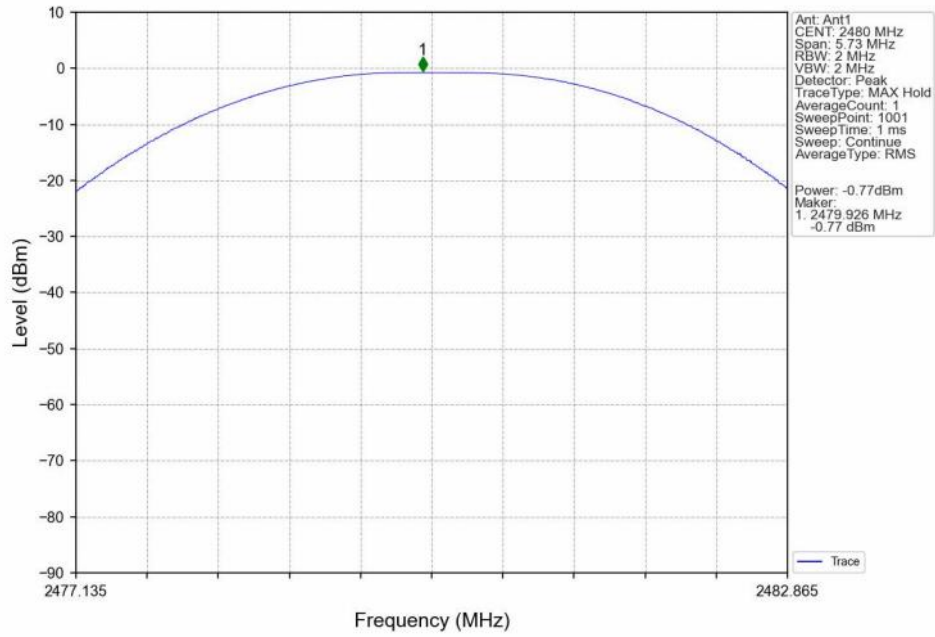


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

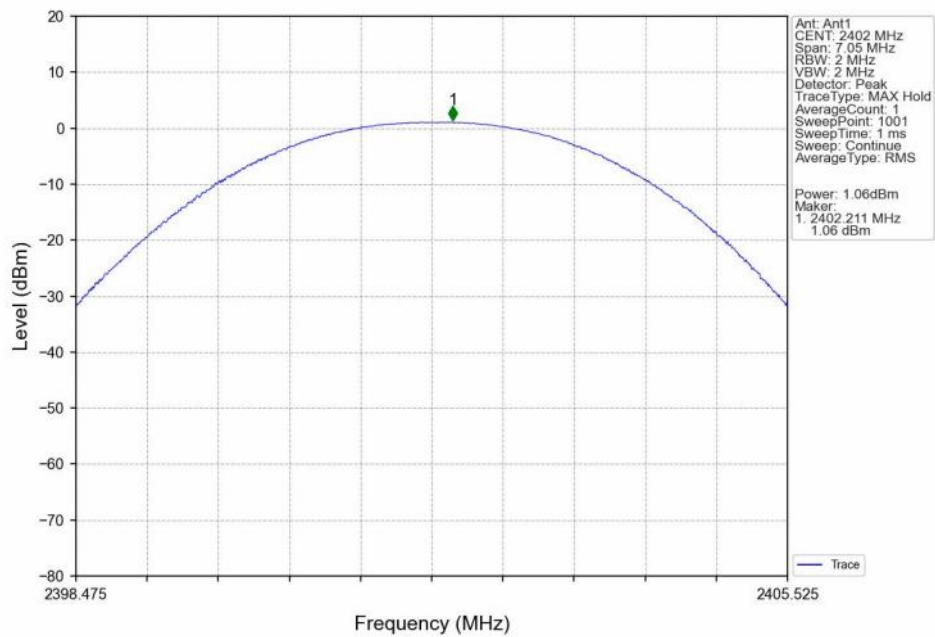


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

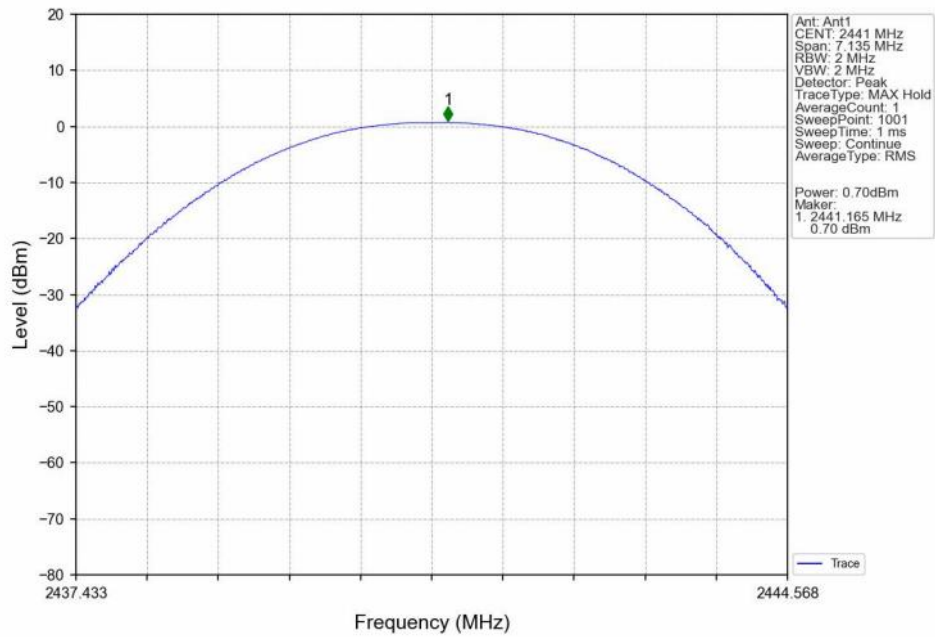


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

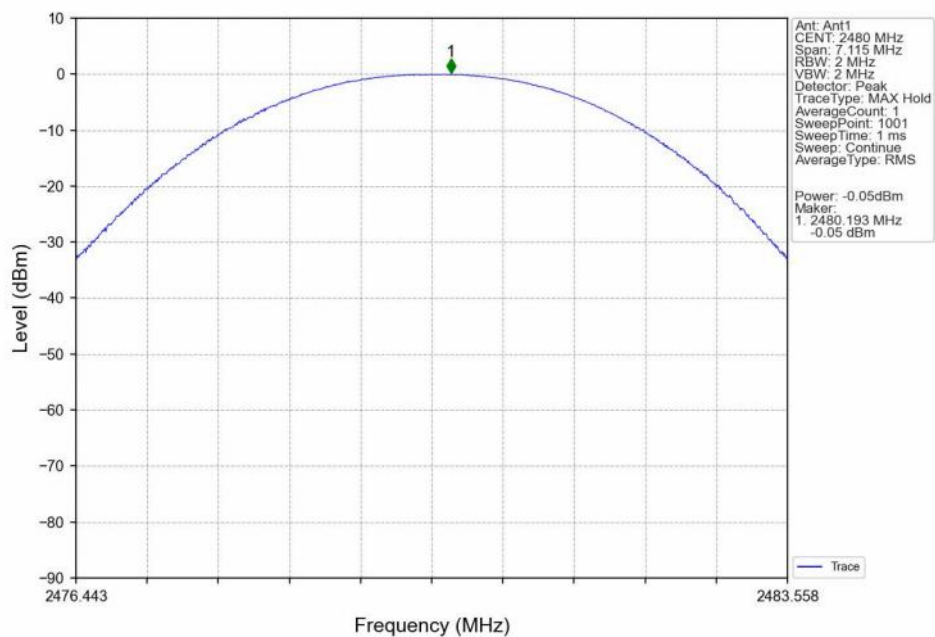


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

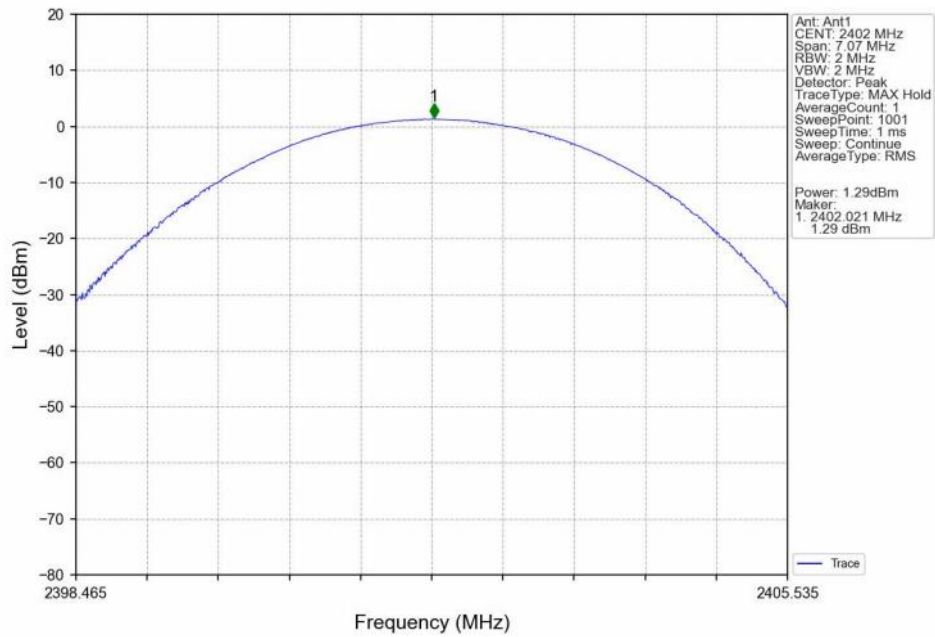

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

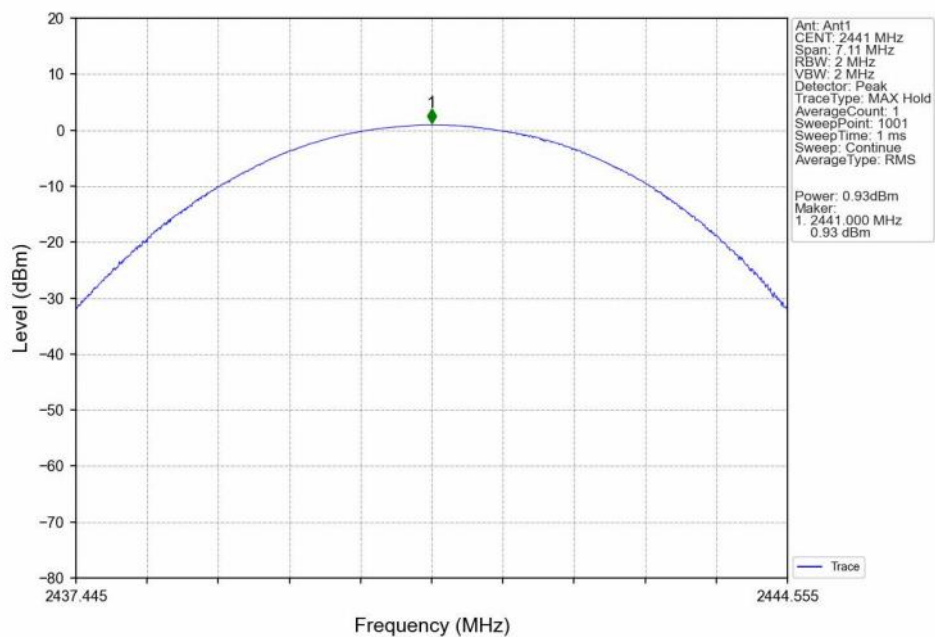

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

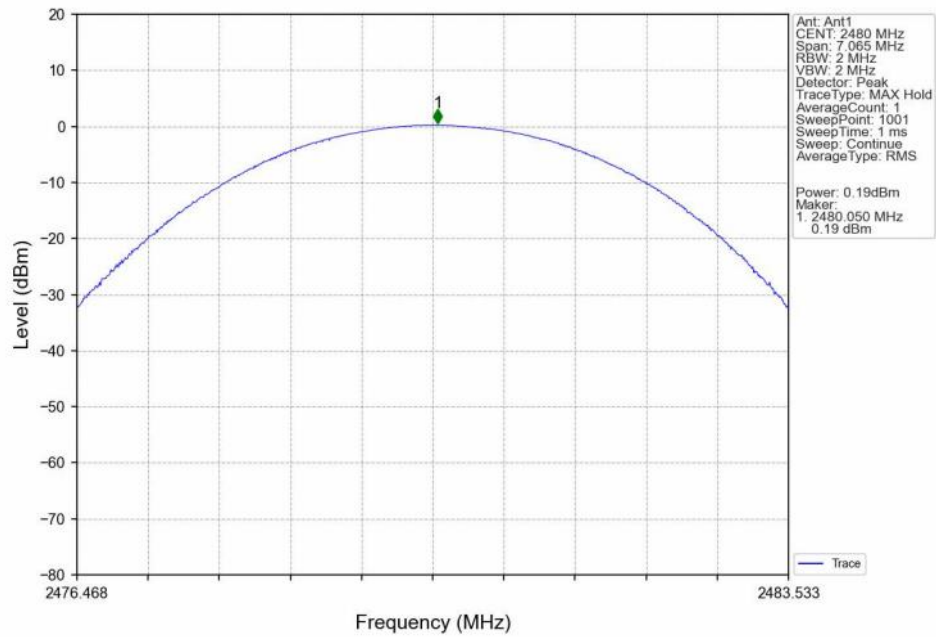

3. Carrier Frequency Separation


3.1 Test Result

3.1.1 Ant1


Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	1.000	1.146	≥ 0.764	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	1.001	1.427	≥ 0.951	Pass
8DPSK	SISO	HOPP	3DH5	0.996	1.422	≥ 0.948	Pass

3.2 Test Graph

3.2.1 Ant1

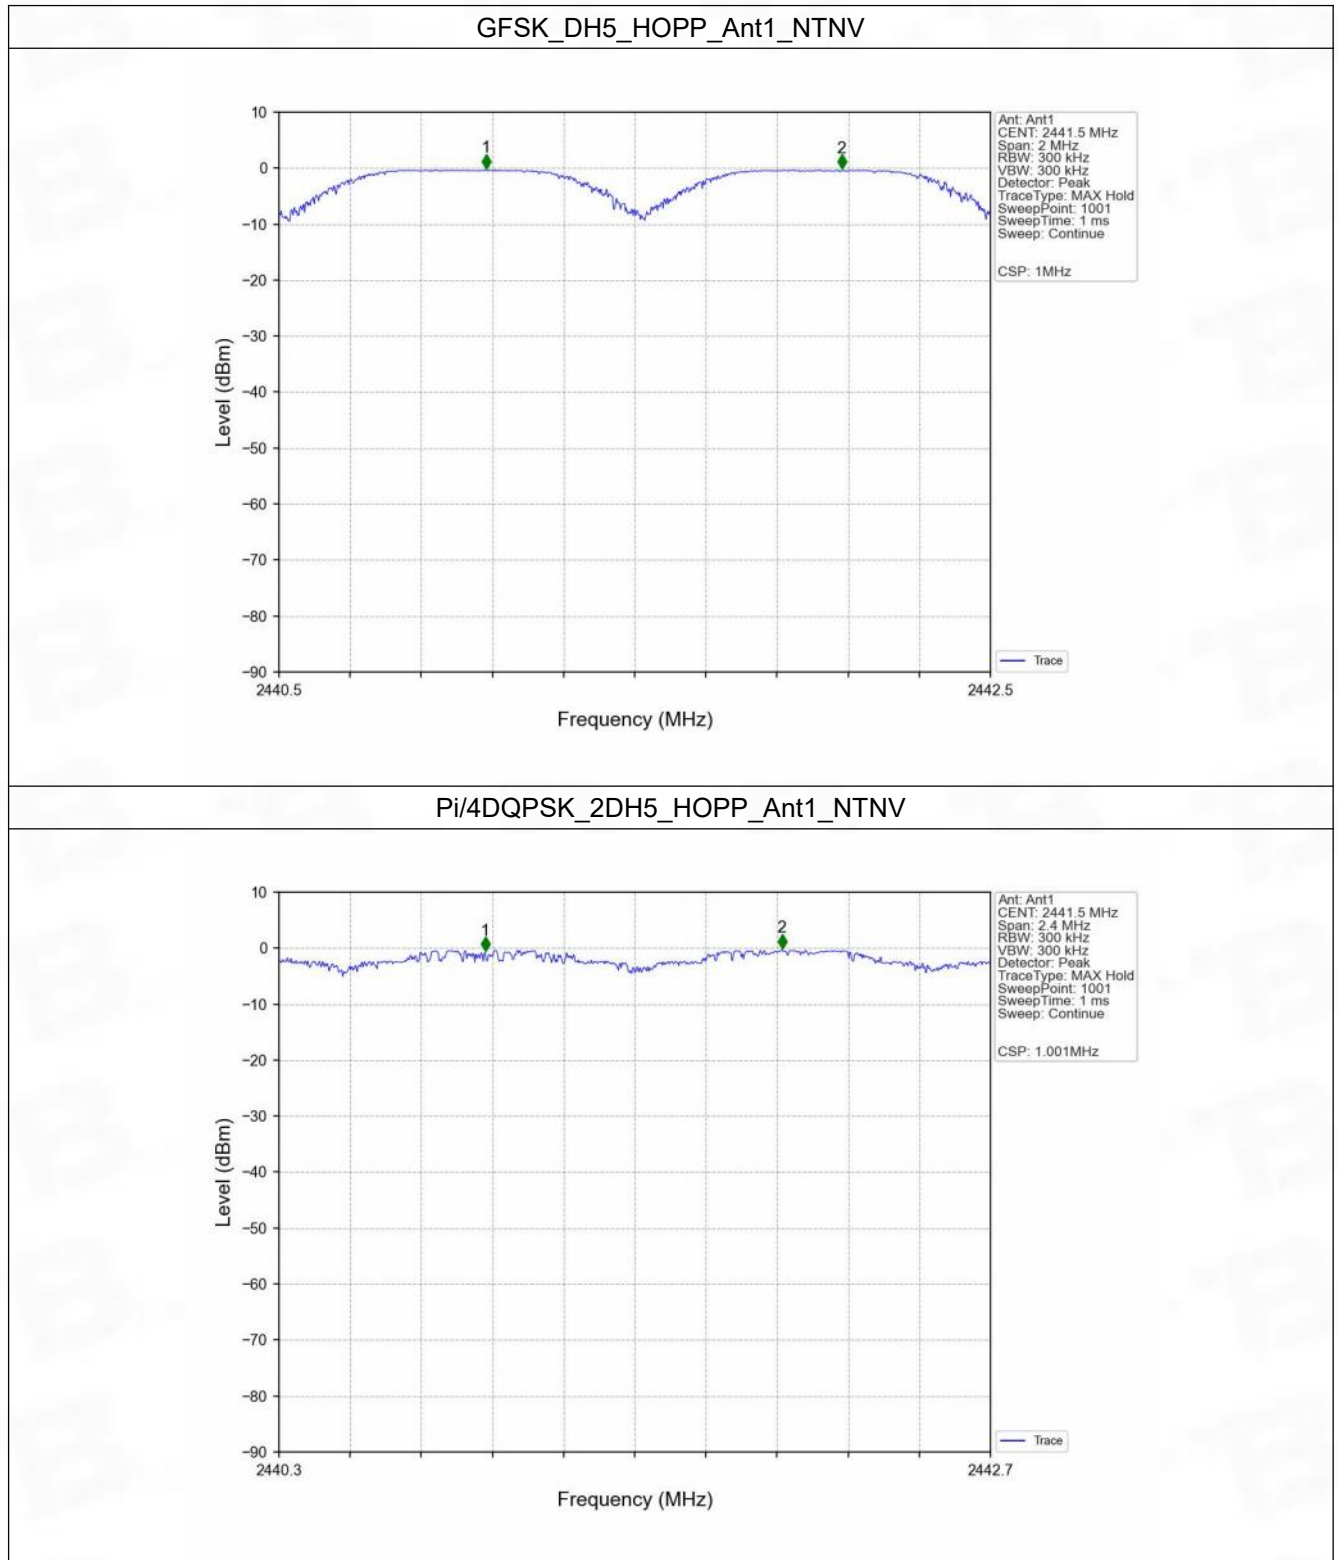

8DPSK_3DH5_HOPP_Ant1_NTNV

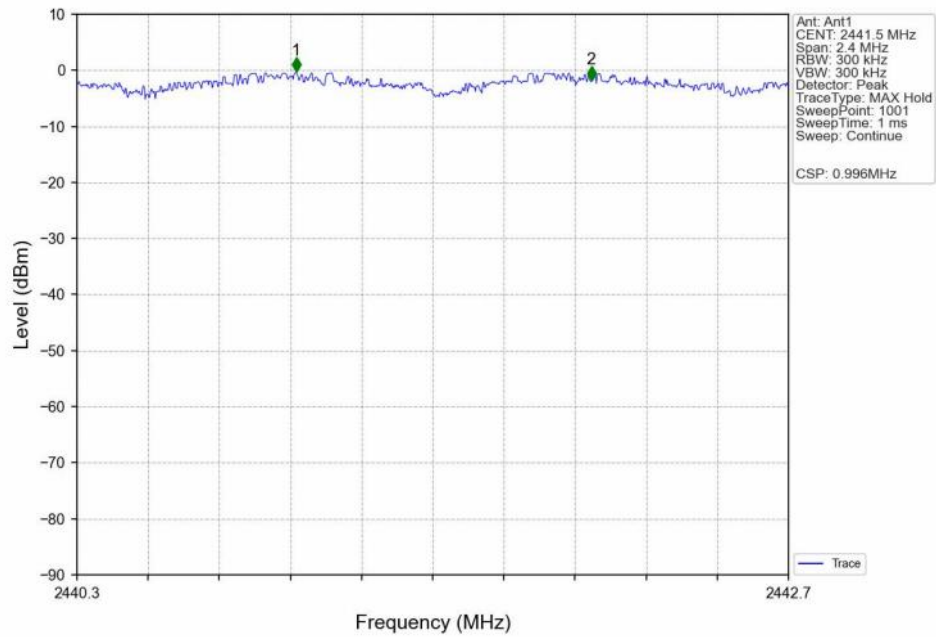

4. Number of Hopping Frequencies

4.1 Test Result


4.1.1 HoppNum

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	≥ 15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	≥ 15	Pass
8DPSK	SISO	HOPP	3DH5	79	≥ 15	Pass


4.2 Test Graph

4.2.1 HoppNum


GFSK_DH5_HOPP_Ant1_NTNV

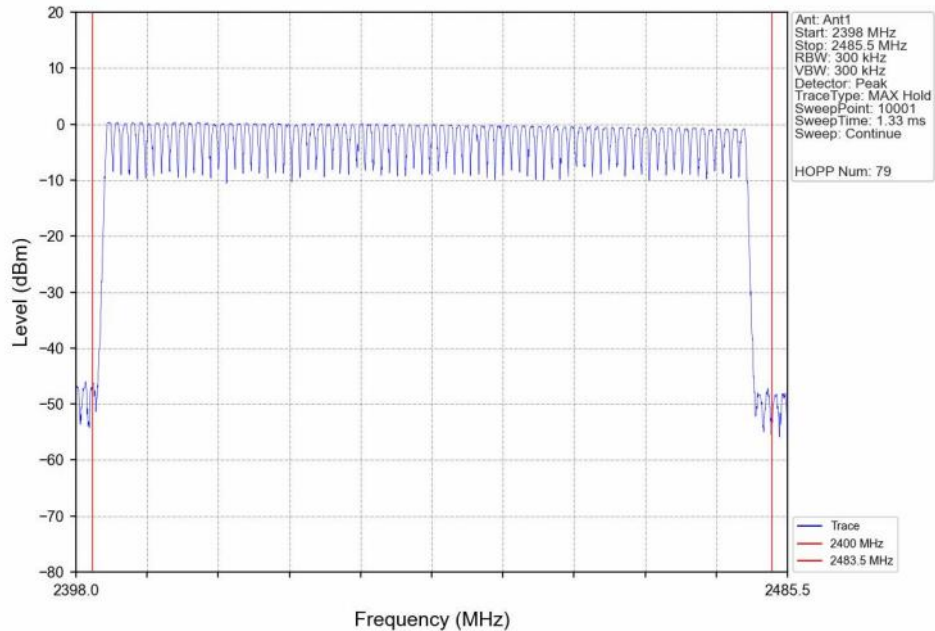

Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

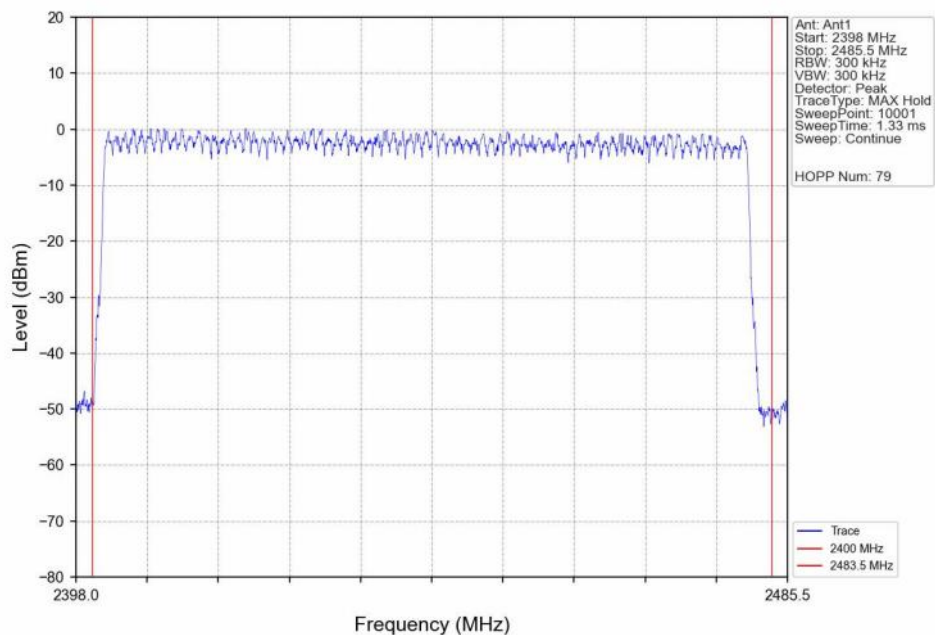

8DPSK_3DH5_HOPP_Ant1_NTNV

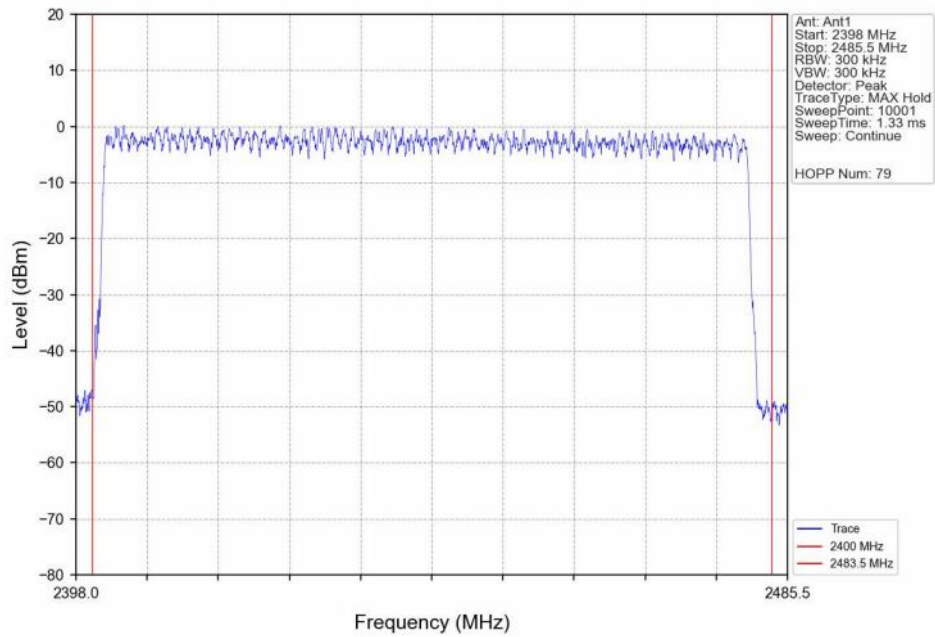

5. Time of Occupancy (Dwell Time)


5.1 Test Result

5.1.1 Ant1


Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.386	31.600	317	122.362	<=400	Pass
			DH3	1.642	31.600	160	262.720	<=400	Pass
			DH5	2.888	31.600	116	335.008	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH1	0.390	31.600	317	123.630	<=400	Pass
			2DH3	1.642	31.600	159	261.078	<=400	Pass
			2DH5	2.896	31.600	102	295.392	<=400	Pass
8DPSK	SISO	HOPP	3DH1	0.396	31.600	318	125.928	<=400	Pass
			3DH3	1.646	31.600	152	250.192	<=400	Pass
			3DH5	2.898	31.600	119	344.862	<=400	Pass

5.2 Test Graph


5.2.1 Ant1

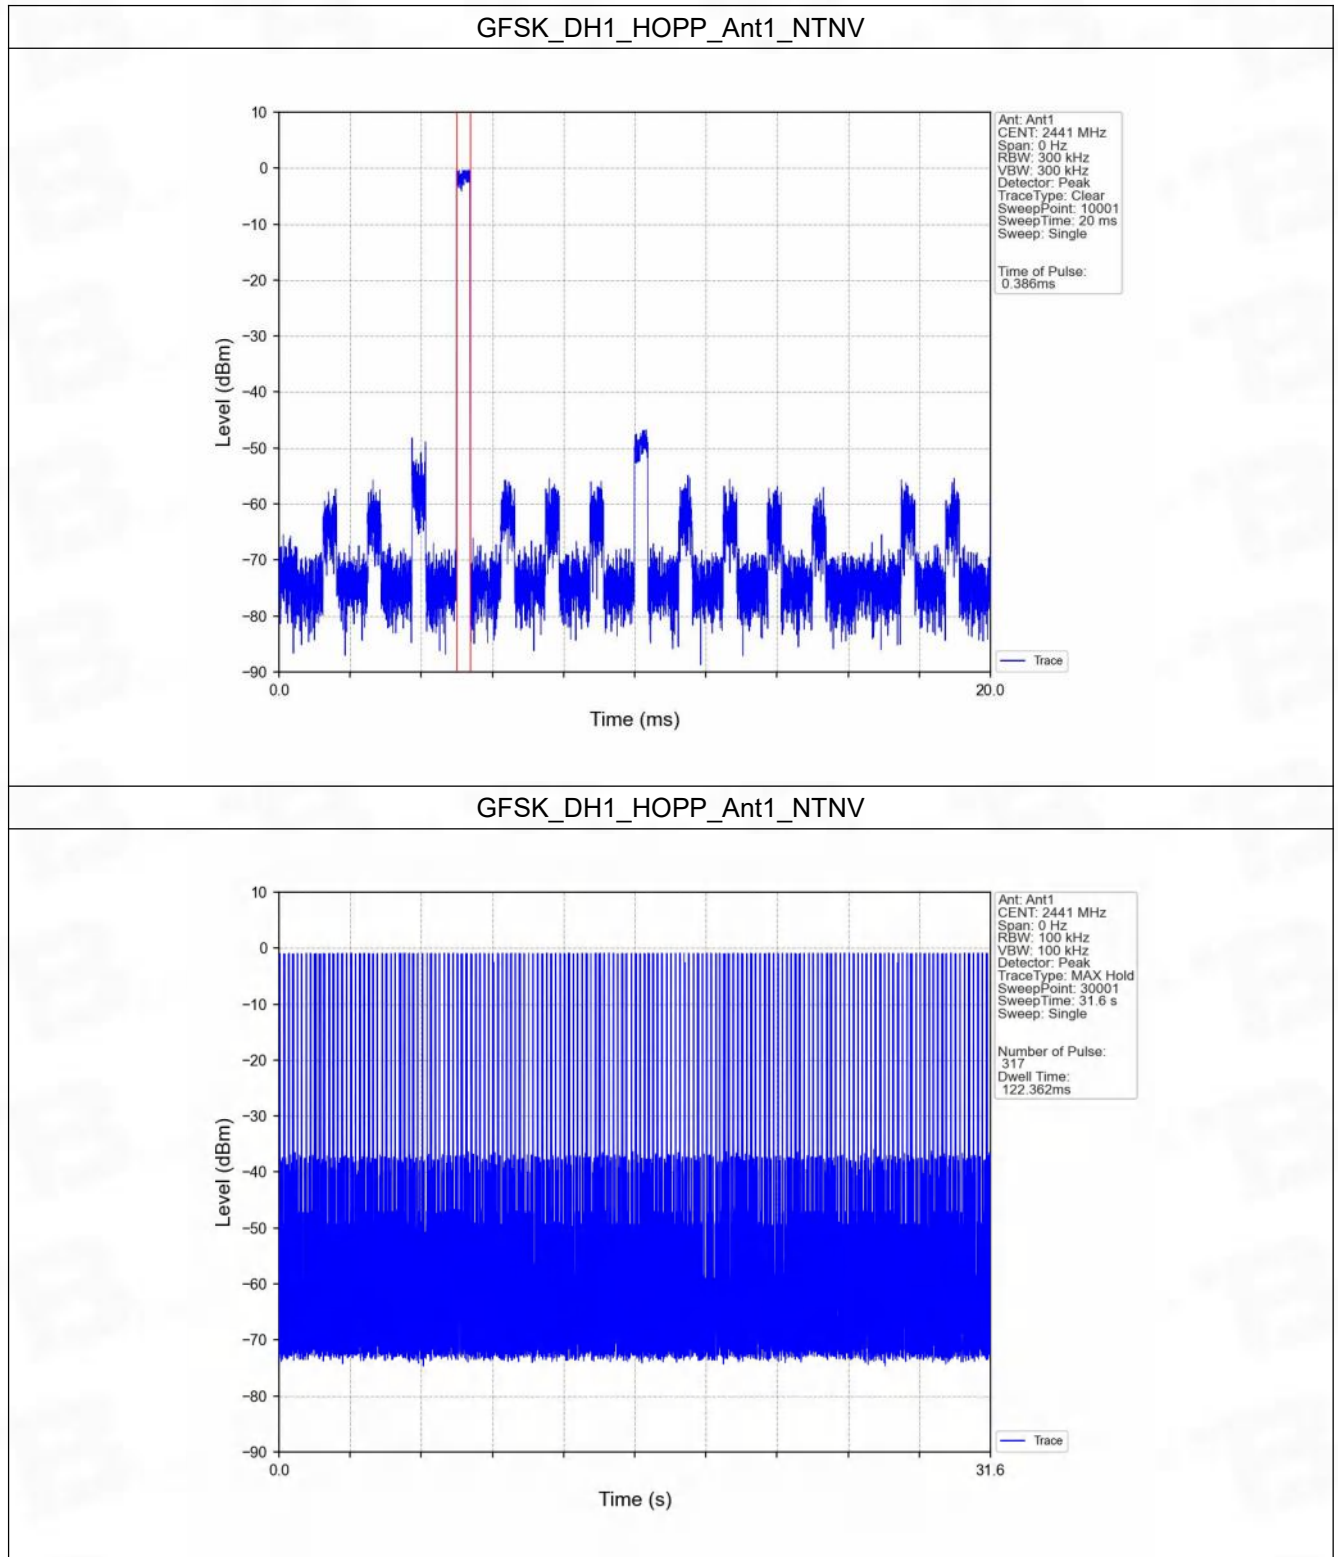


GFSK_DH3_HOPP_Ant1_NTNV

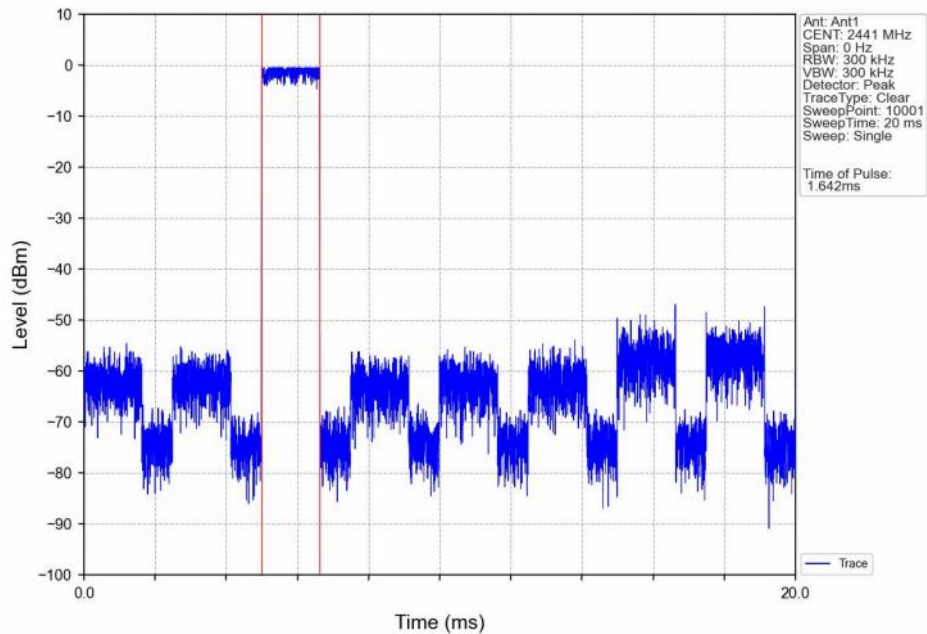


GFSK_DH3_HOPP_Ant1_NTNV

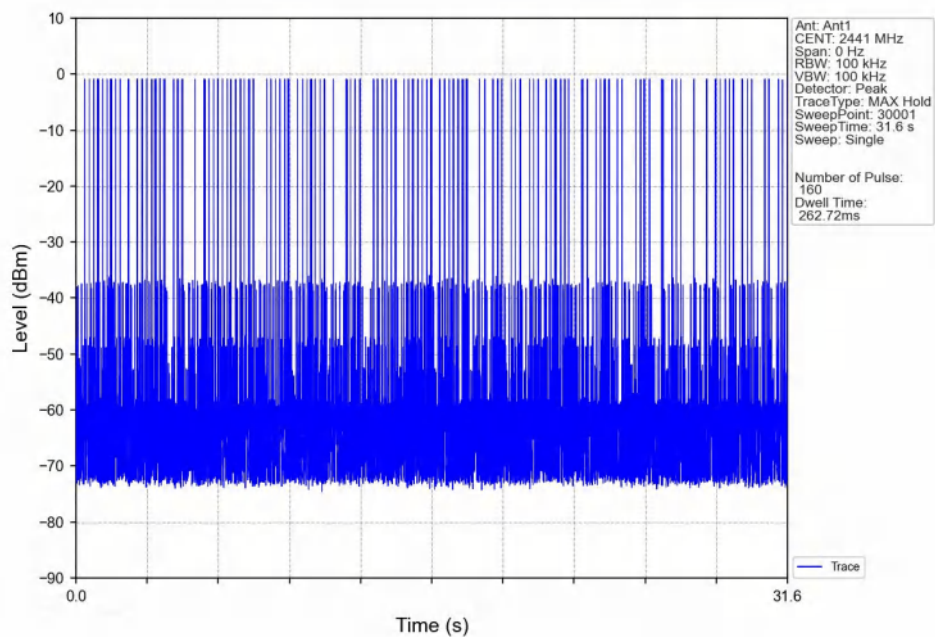


GFSK_DH5_HOPP_Ant1_NTNV

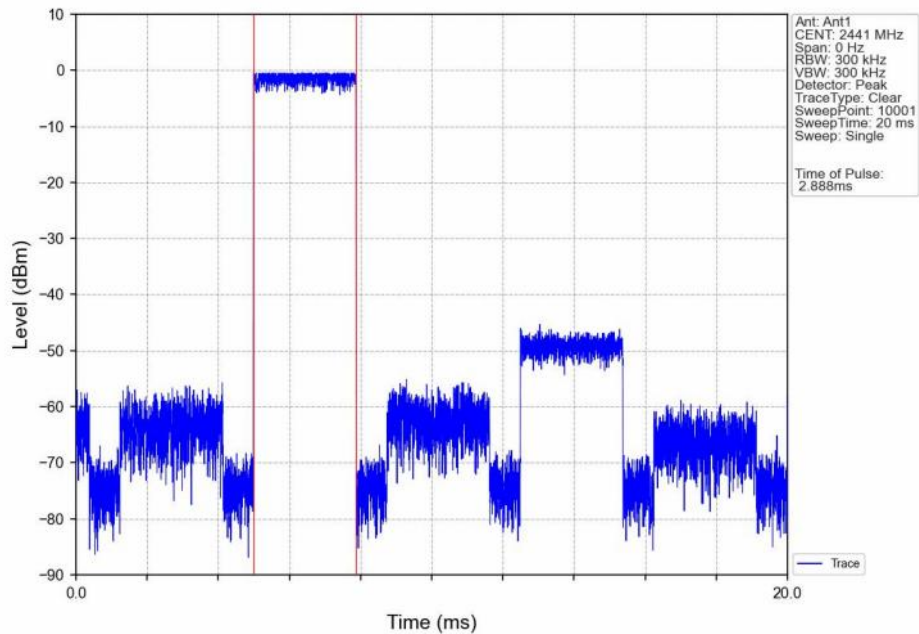


GFSK_DH5_HOPP_Ant1_NTNV

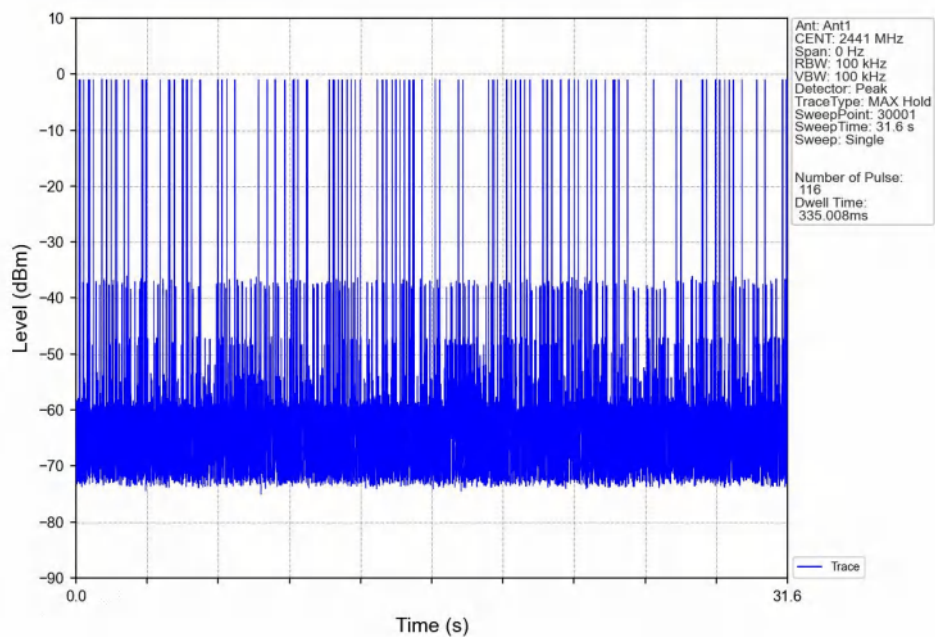


Pi/4DQPSK_2DH1_HOPP_Ant1_NTNV

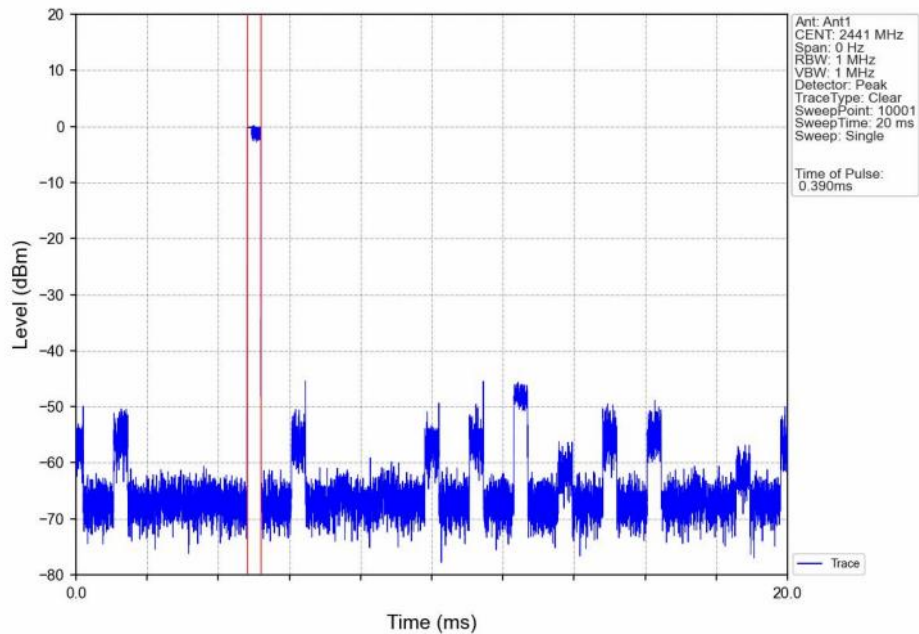


Pi/4DQPSK_2DH1_HOPP_Ant1_NTNV

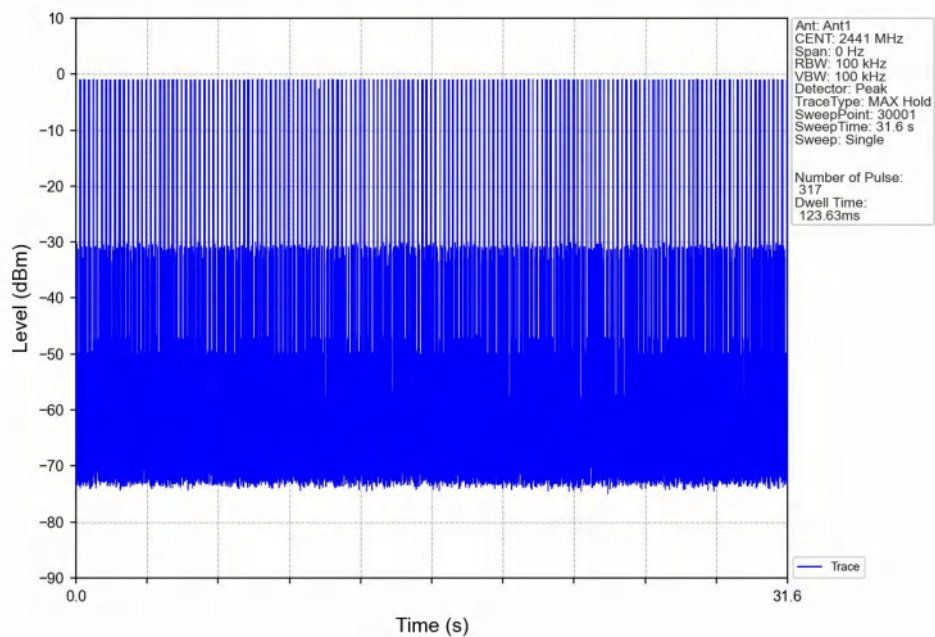


Pi/4DQPSK_2DH3_HOPP_Ant1_NTNV

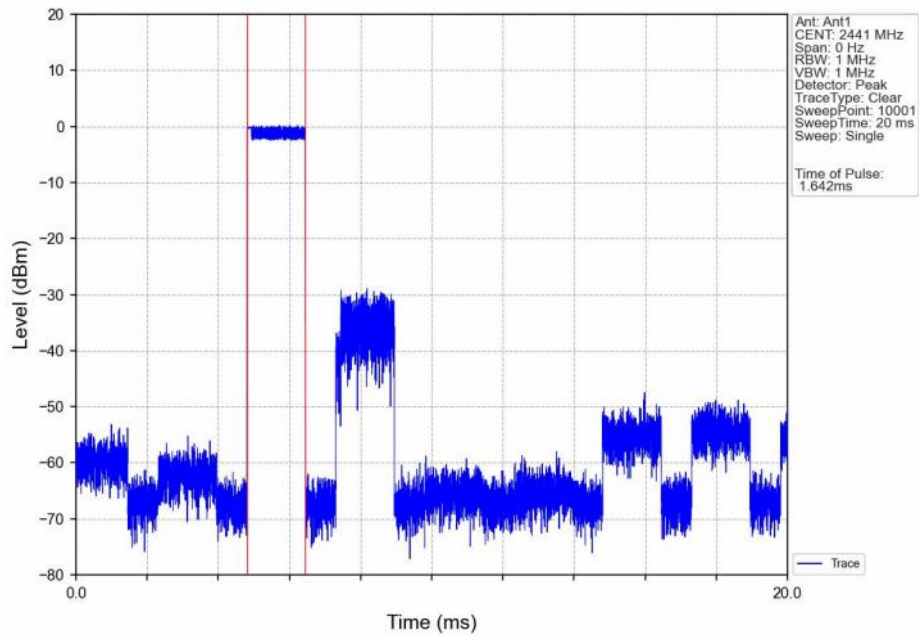


Pi/4DQPSK_2DH3_HOPP_Ant1_NTNV

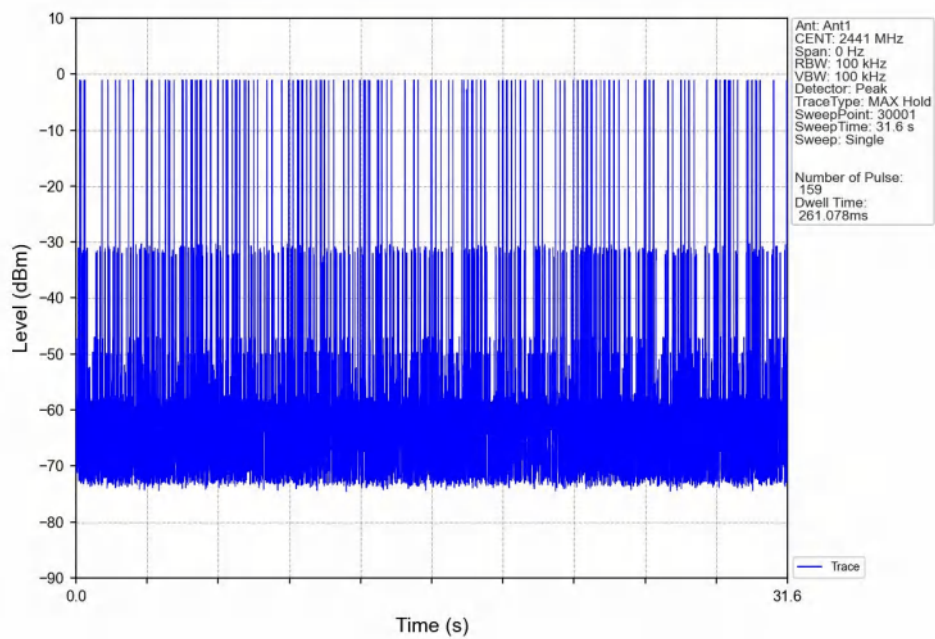


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

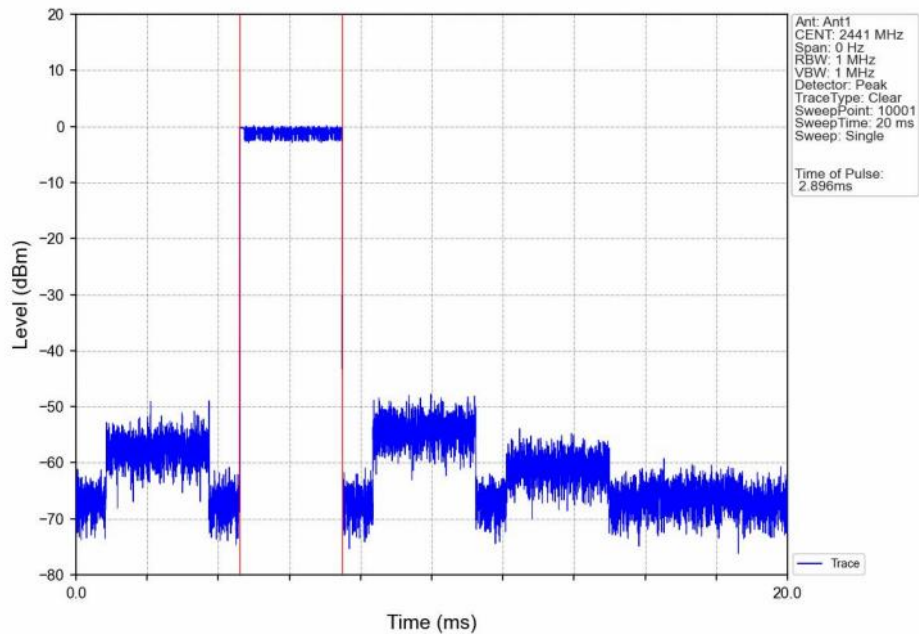


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

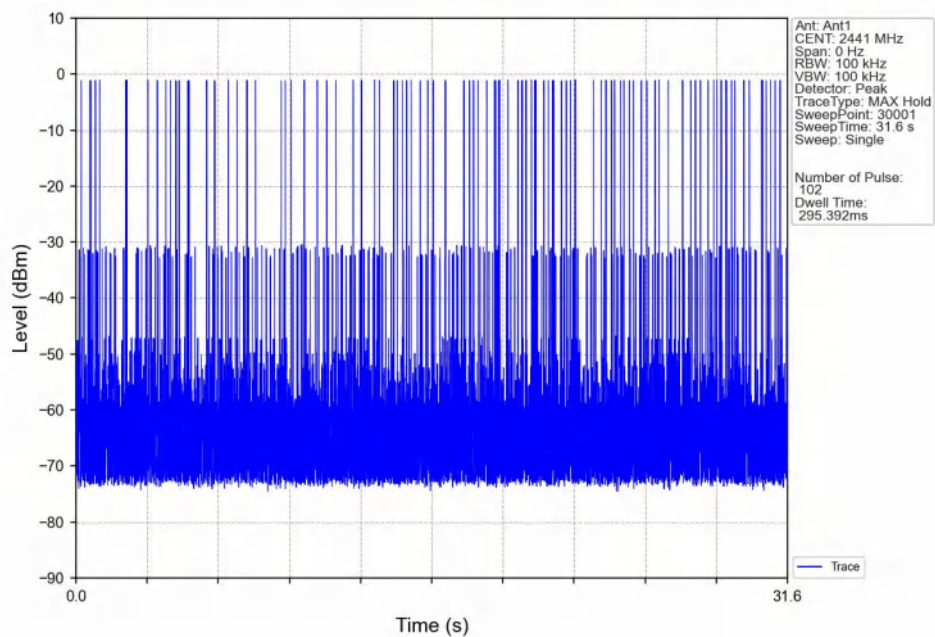


8DPSK_3DH1_HOPP_Ant1_NTNV

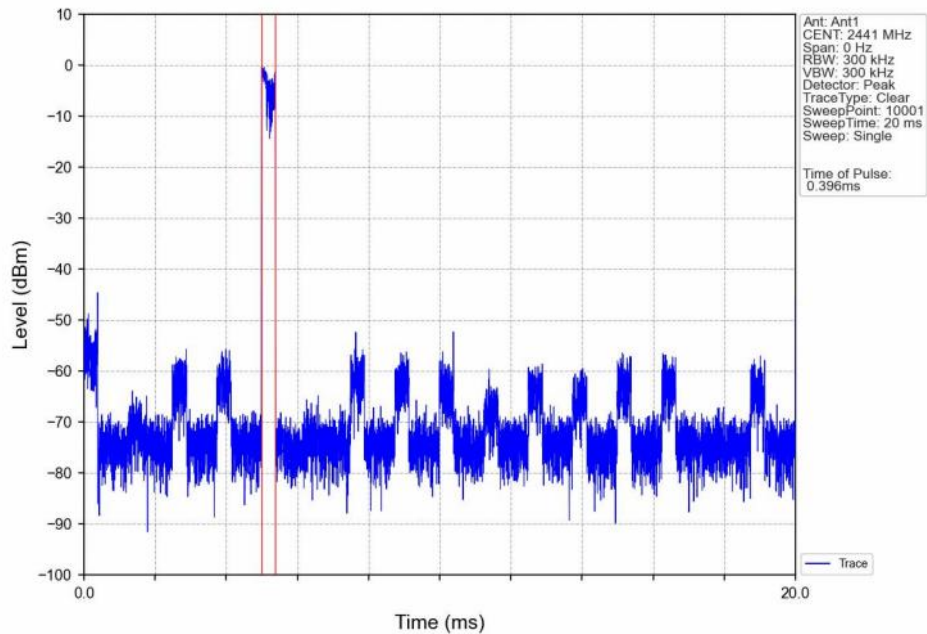


8DPSK_3DH1_HOPP_Ant1_NTNV

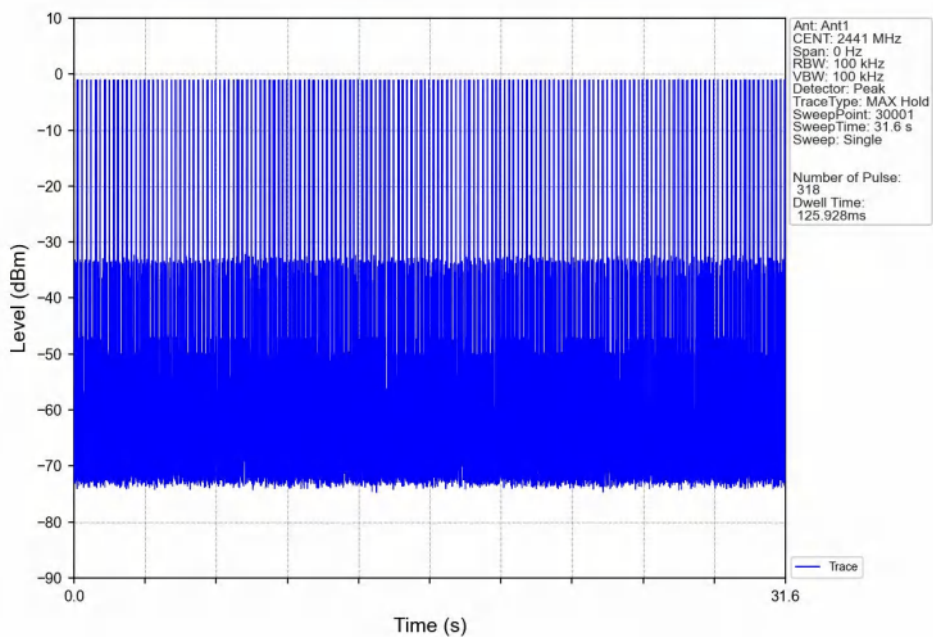


8DPSK_3DH3_HOPP_Ant1_NTNV

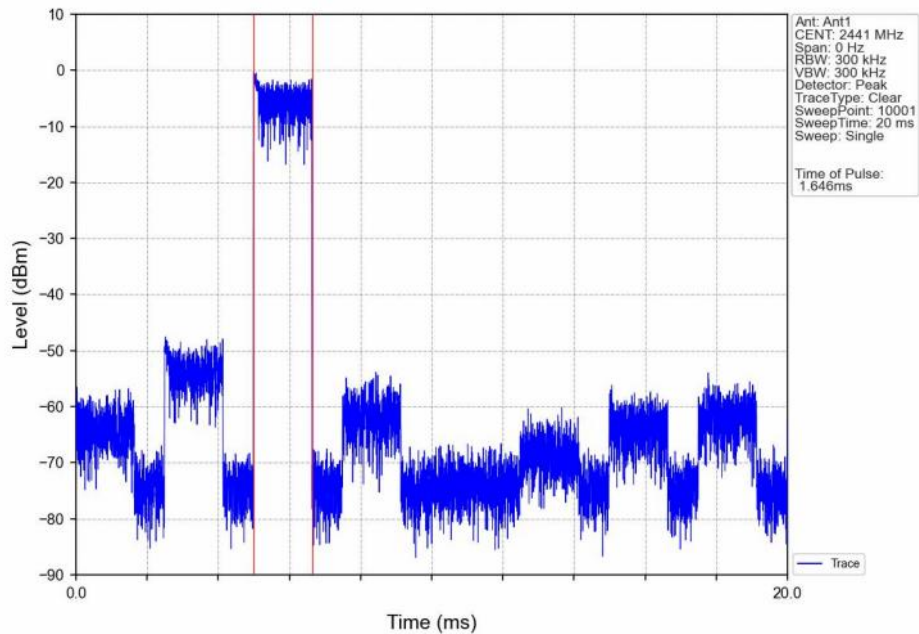


8DPSK_3DH3_HOPP_Ant1_NTNV

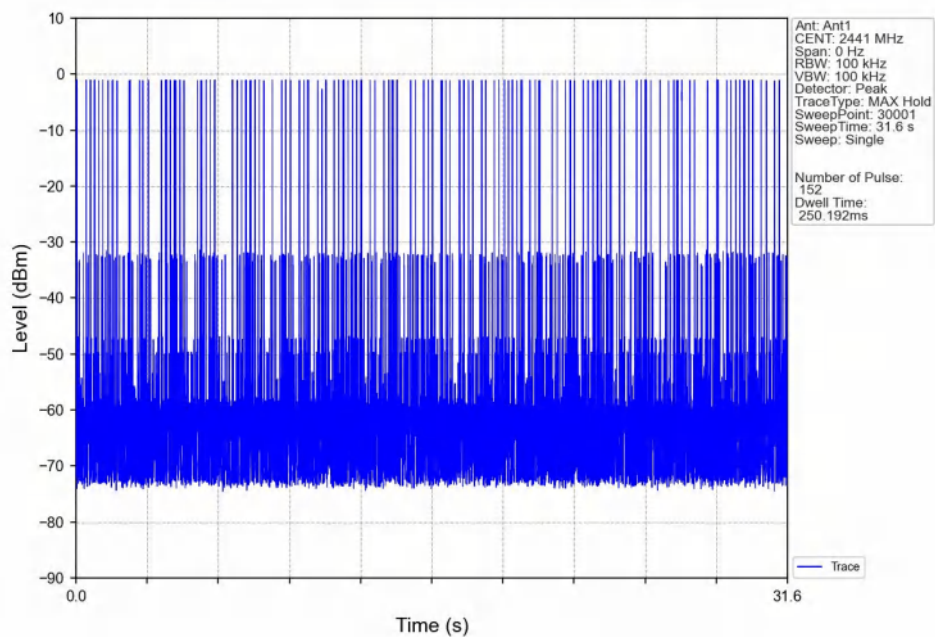

8DPSK_3DH5_HOPP_Ant1_NTNV

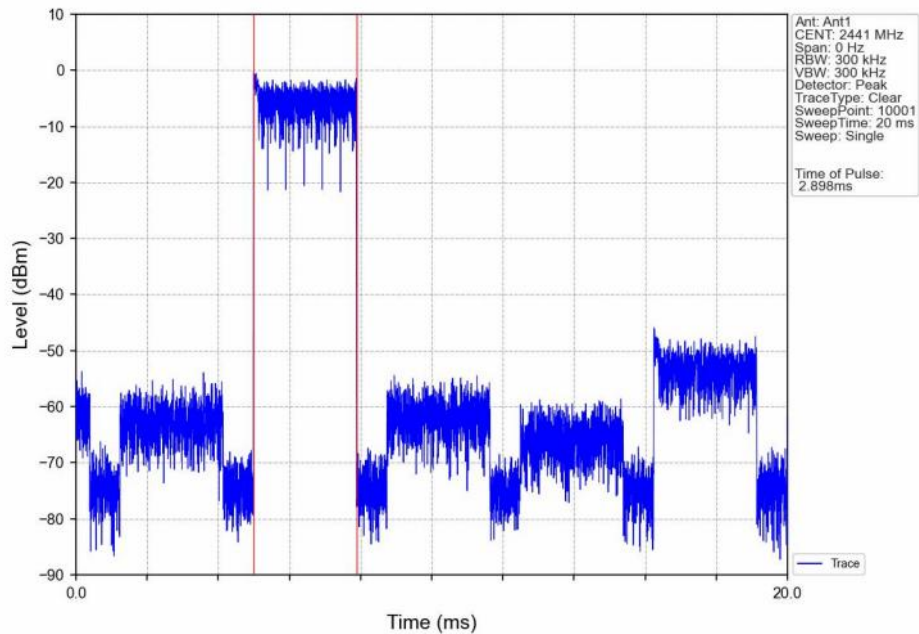

8DPSK_3DH5_HOPP_Ant1_NTNV

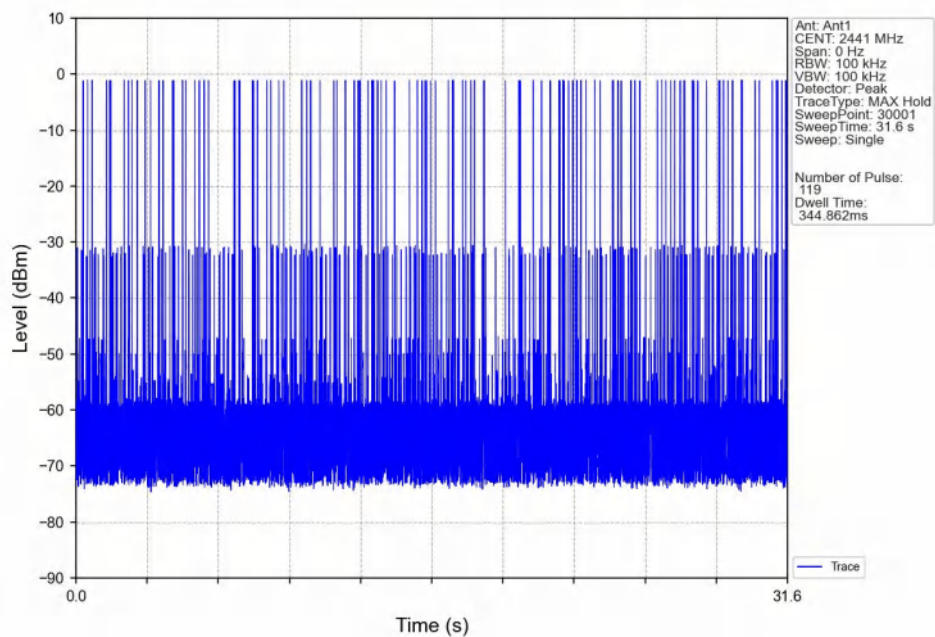

6. Unwanted Emissions In Non-restricted Frequency Bands

6.1 Test Result

6.1.1 Ref


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	0.04
		2441	DH5	1	-0.47
		2480	DH5	1	-1.23
		HOPP	DH5	1	-0.04
Pi/4DQPSK	SISO	2402	2DH5	1	-0.08
		2441	2DH5	1	-0.47
		2480	2DH5	1	-1.27
		HOPP	2DH5	1	0.03
8DPSK	SISO	2402	3DH5	1	-0.16
		2441	3DH5	1	-0.70
		2480	3DH5	1	-1.28
		HOPP	3DH5	1	-0.15

6.1.2 CSE


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	0.04	-19.96	Pass
		2441	DH5	1	-0.47	-20.47	Pass
		2480	DH5	1	-1.23	-21.23	Pass
		HOPP	DH5	1	-0.04	-20.04	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	-0.08	-20.08	Pass
		2441	2DH5	1	-0.47	-20.47	Pass
		2480	2DH5	1	-1.27	-21.27	Pass
		HOPP	2DH5	1	0.03	-19.97	Pass
8DPSK	SISO	2402	3DH5	1	-0.16	-20.16	Pass
		2441	3DH5	1	-0.70	-20.70	Pass
		2480	3DH5	1	-1.28	-21.28	Pass
		HOPP	3DH5	1	-0.15	-20.15	Pass

6.2 Test Graph


6.2.1 Ref

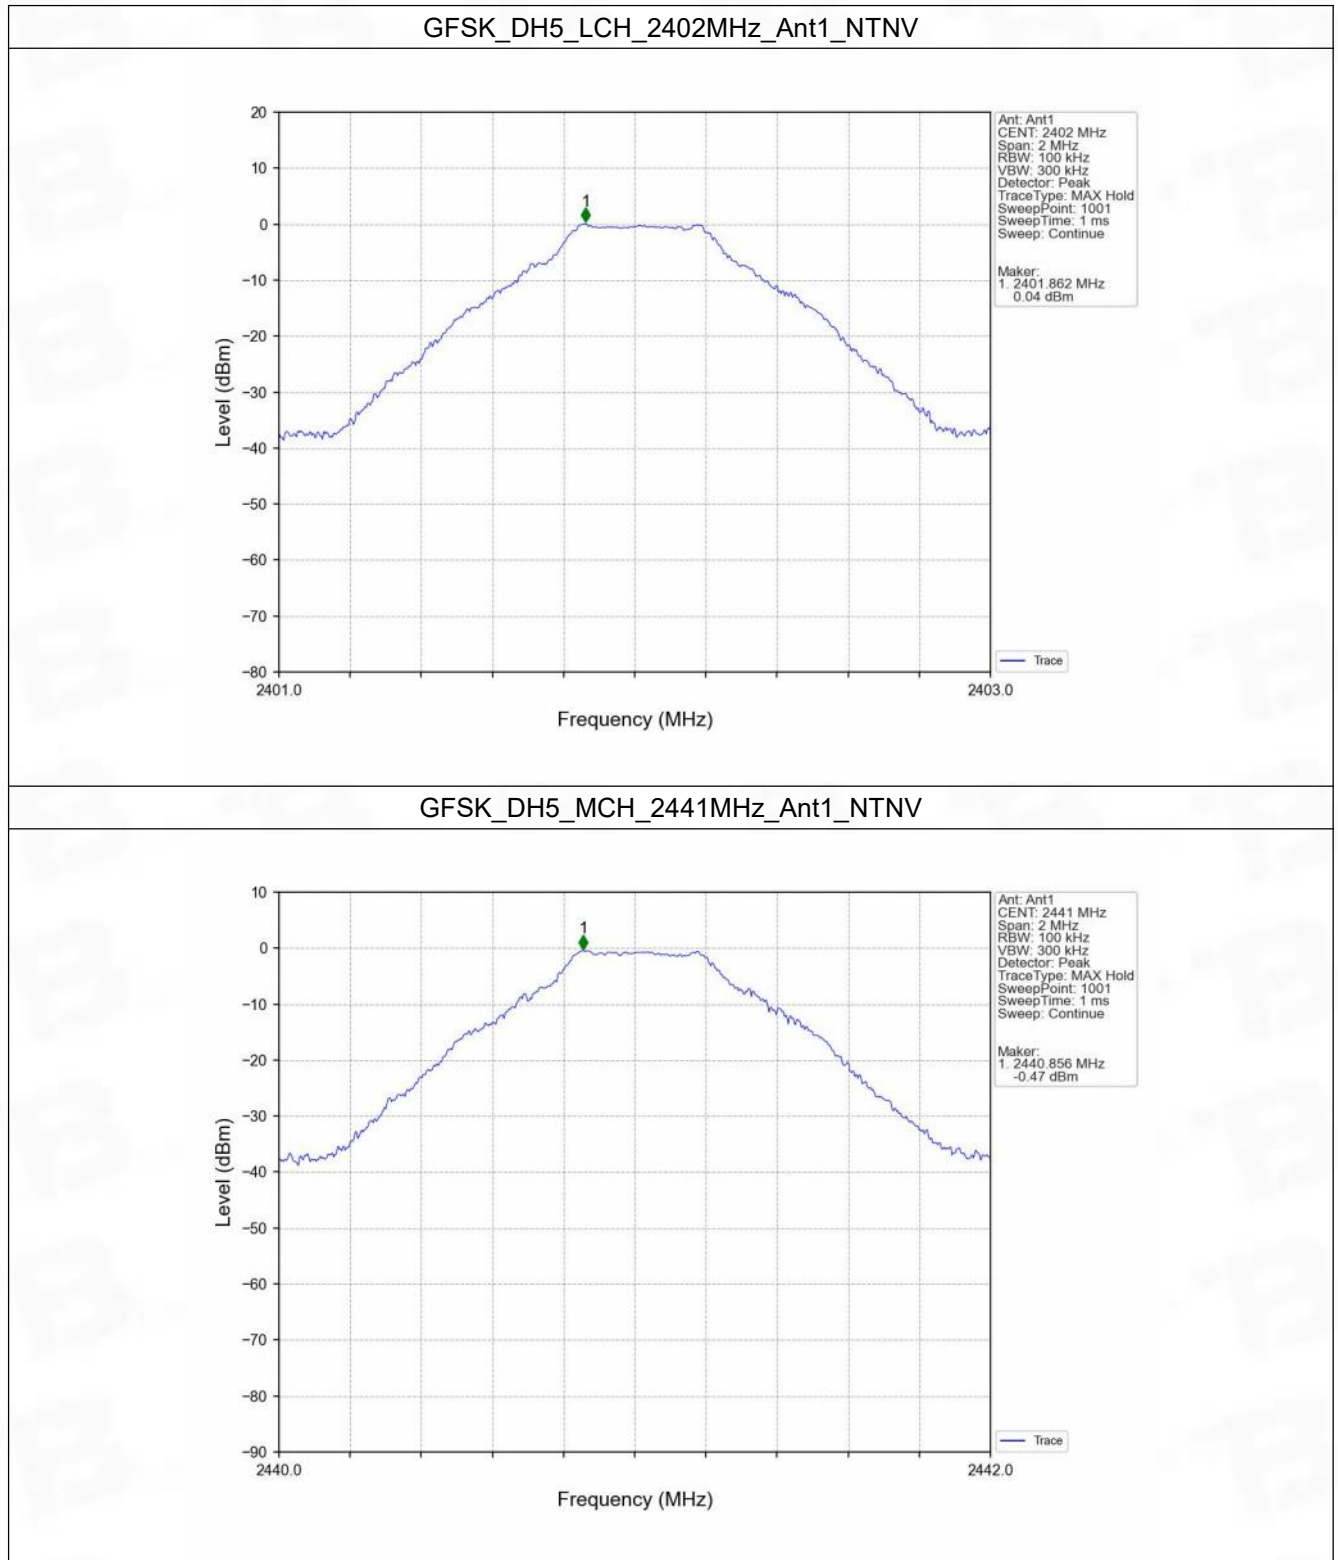


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

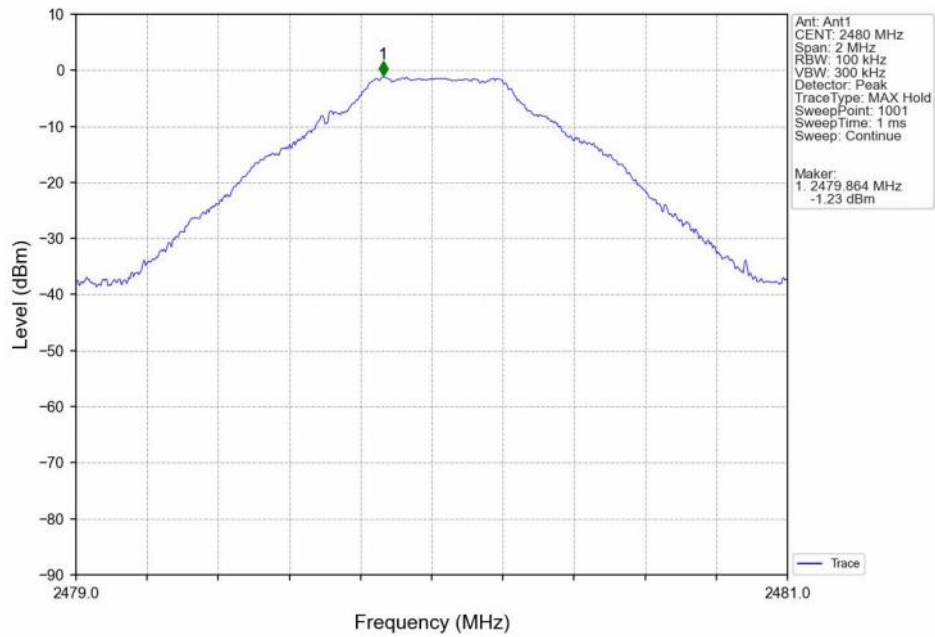


GFSK_DH5_HOPP_2440MHz_Ant1_NTNV

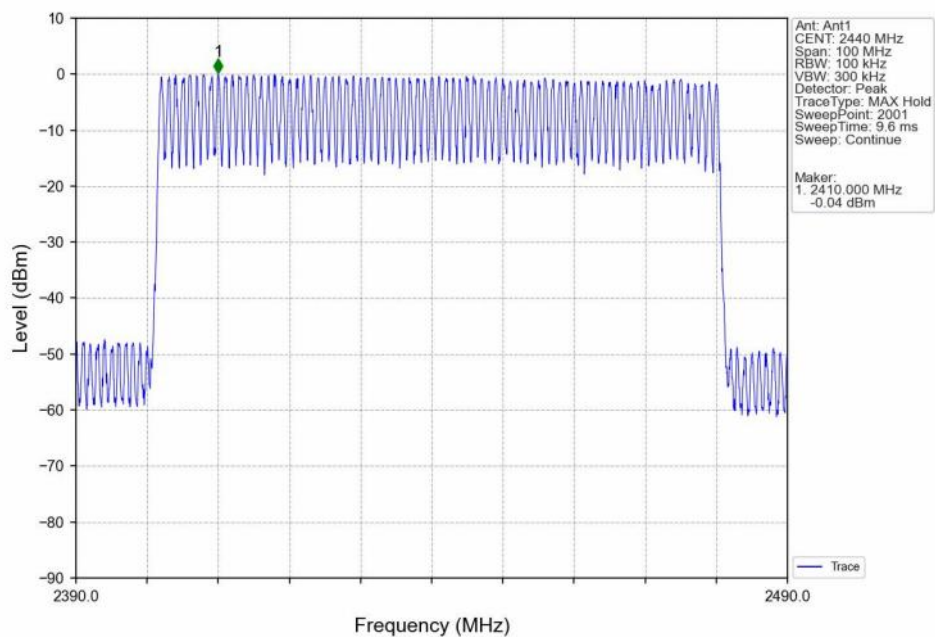


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

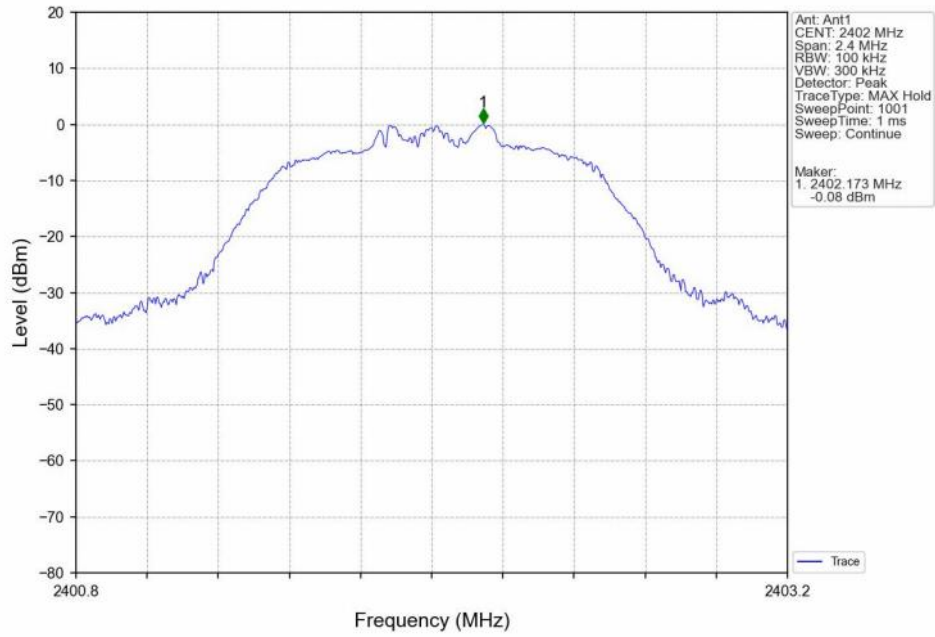


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

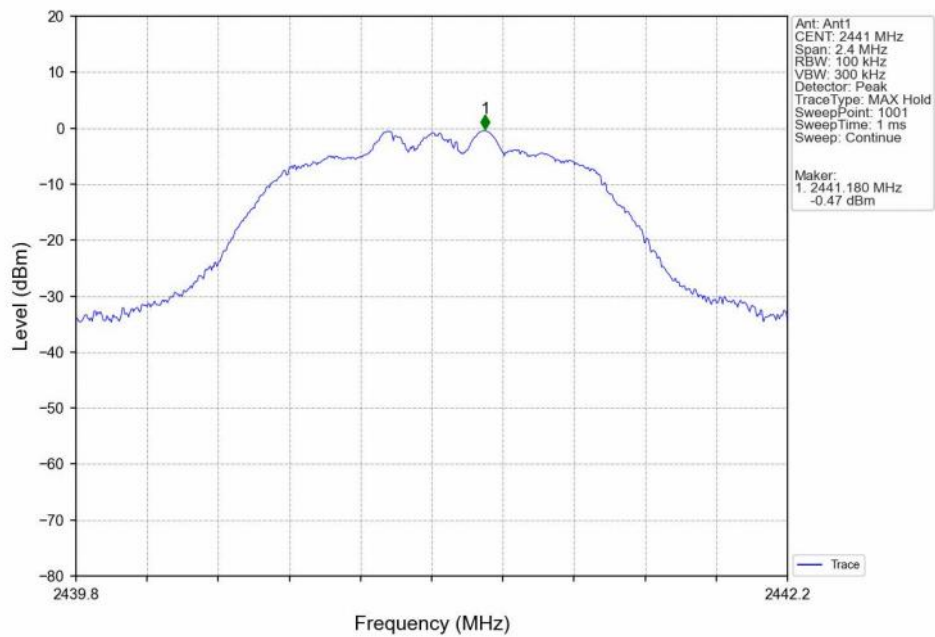


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

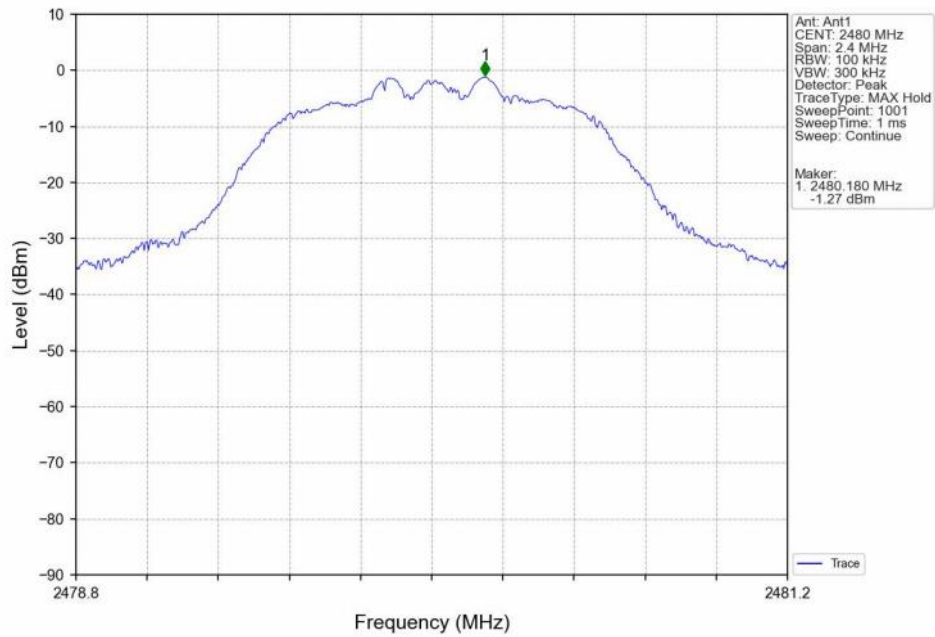


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

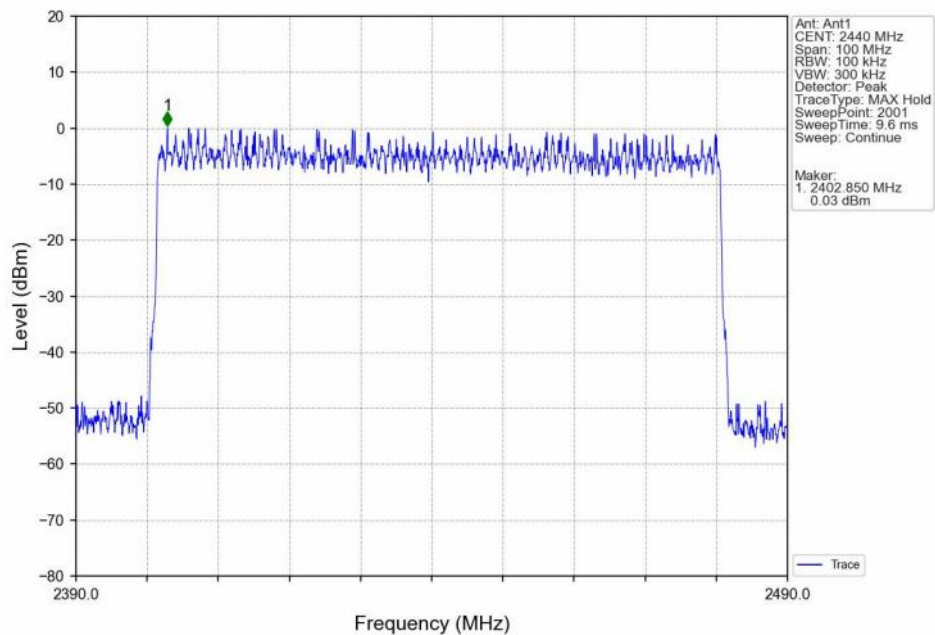


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

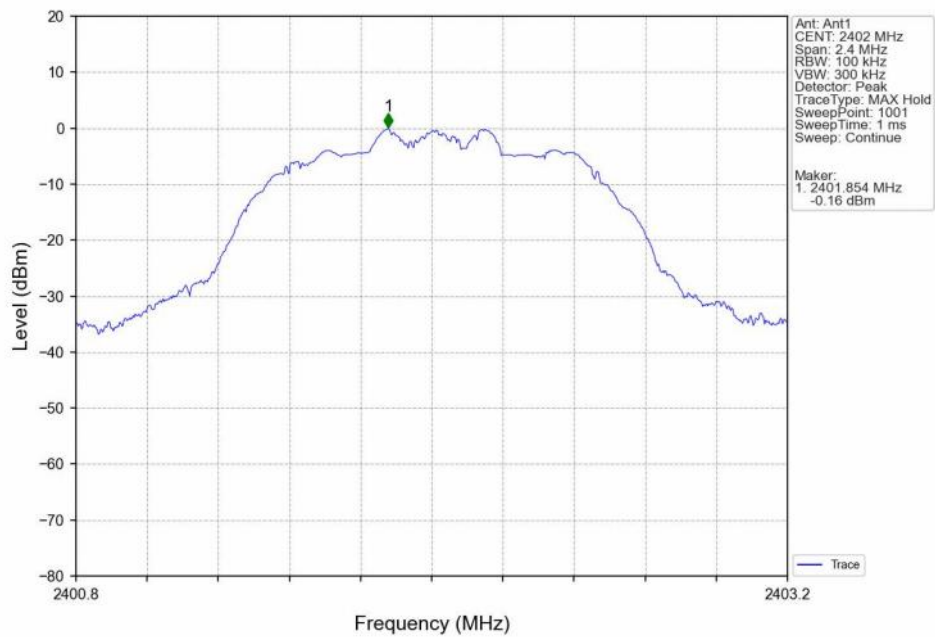


8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

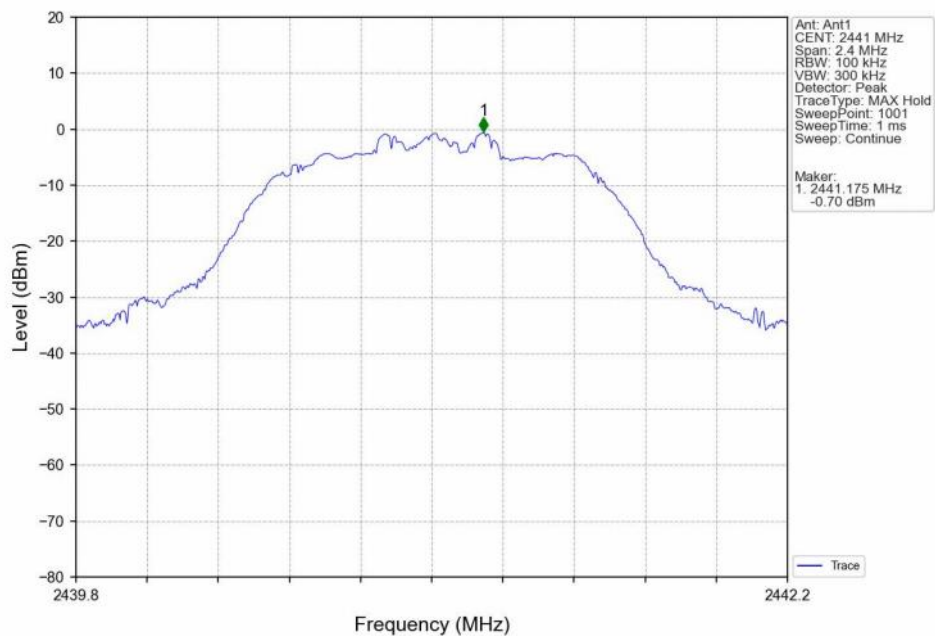

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

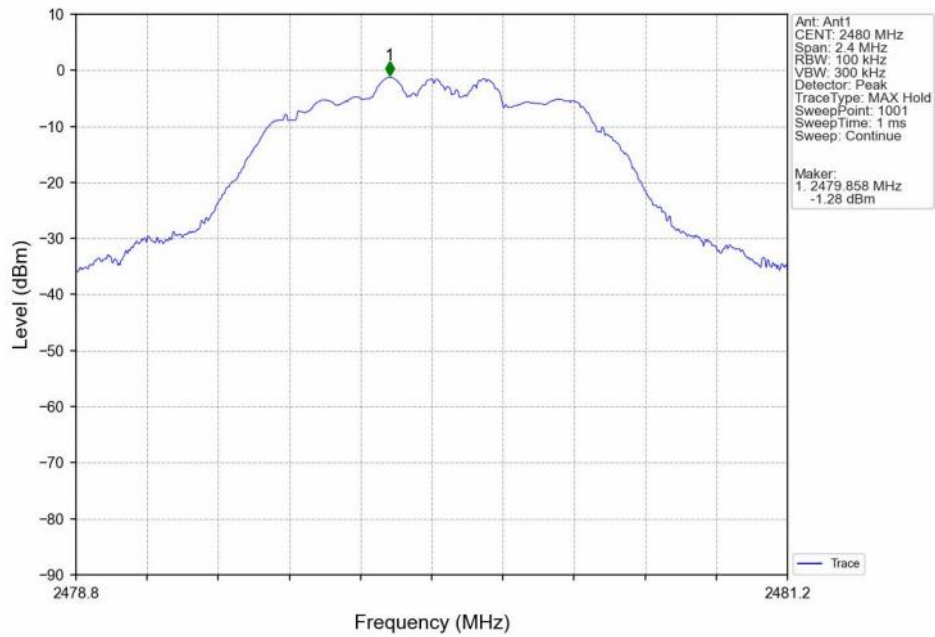


8DPSK_3DH5_HOPP_Ant1_NTNV

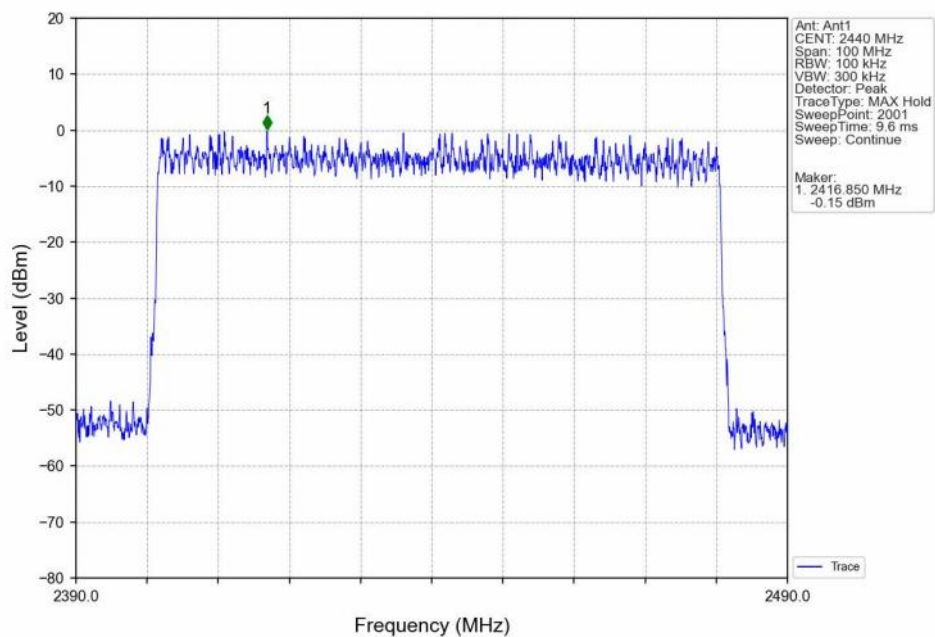


6.2.2 CSE


GFSK_DH5_LCH_2402MHz_Ant1_NTNV

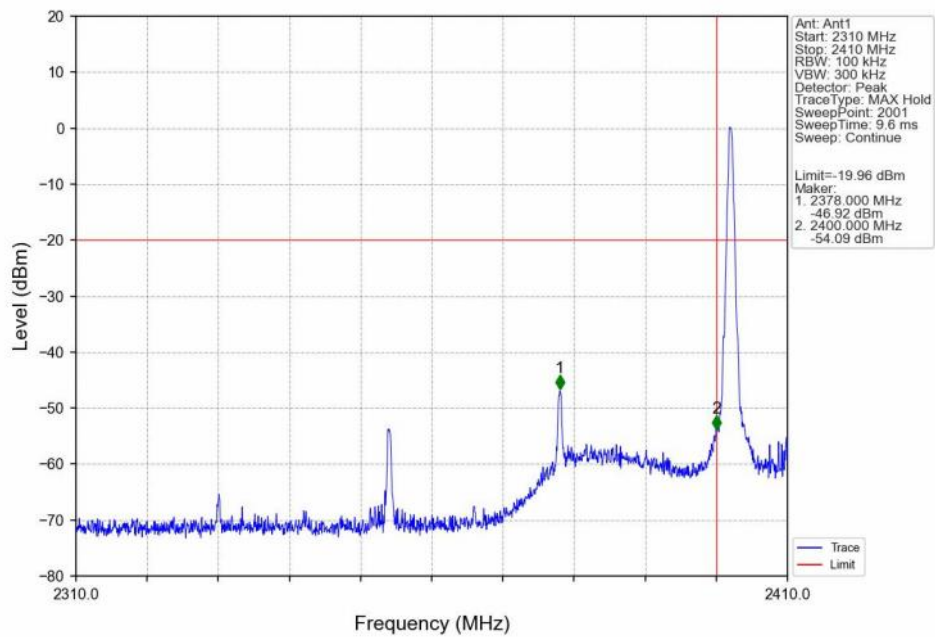


GFSK_DH5_LCH_2402MHz_Ant1_NTNV

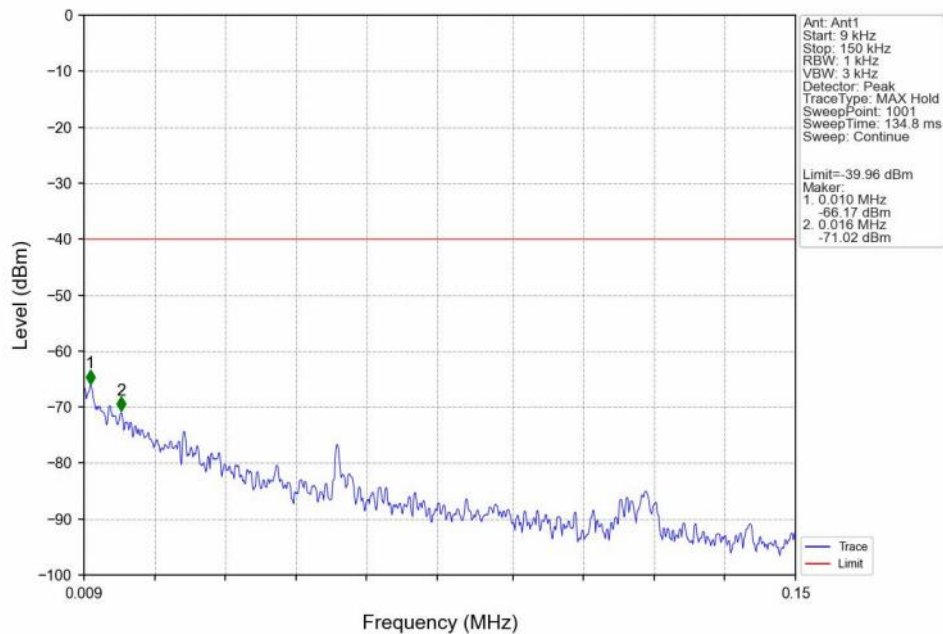


GFSK_DH5_LCH_2402MHz_Ant1_NTNV

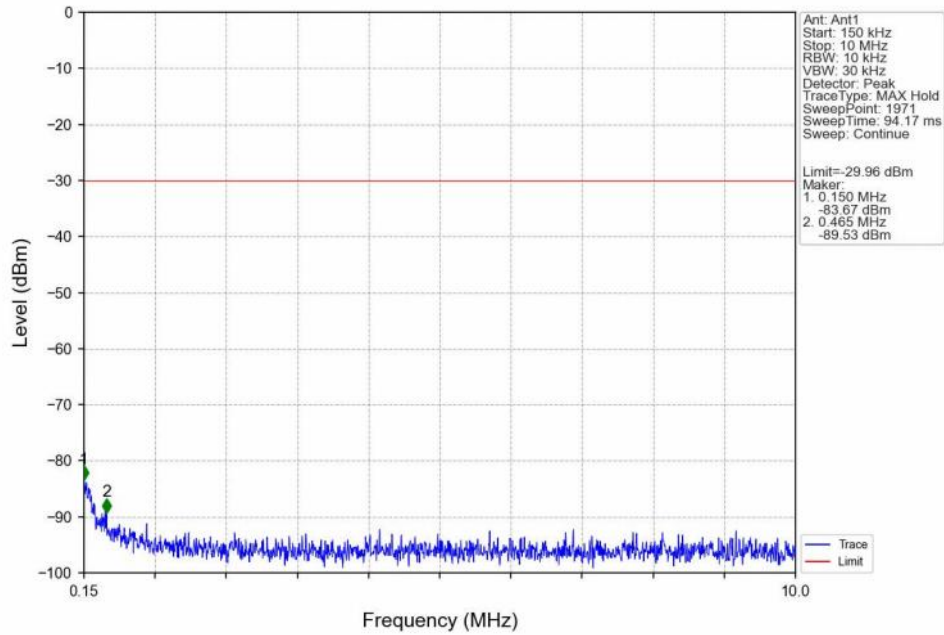


GFSK_DH5_LCH_2402MHz_Ant1_NTNV

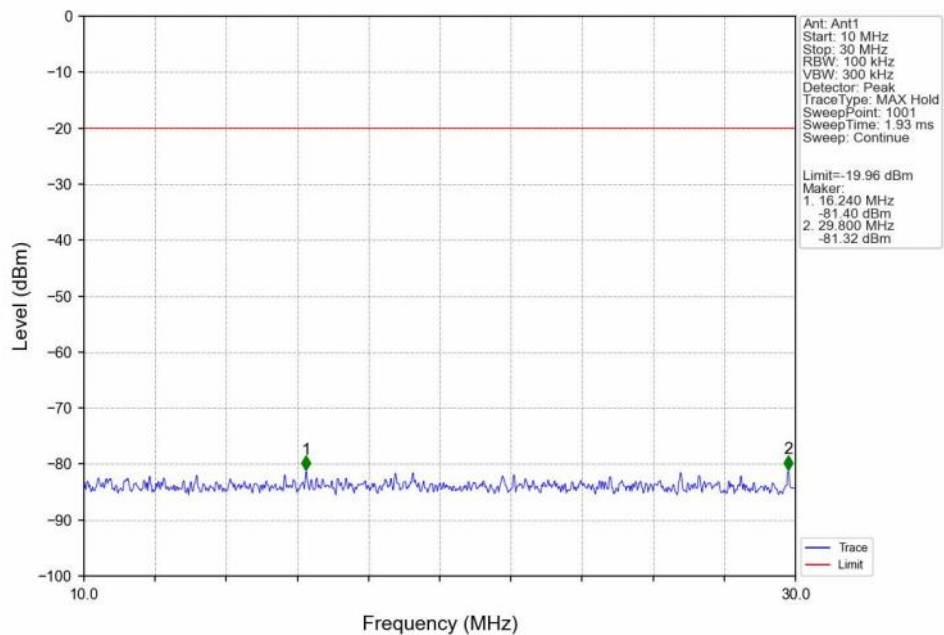


GFSK_DH5_LCH_2402MHz_Ant1_NTNV

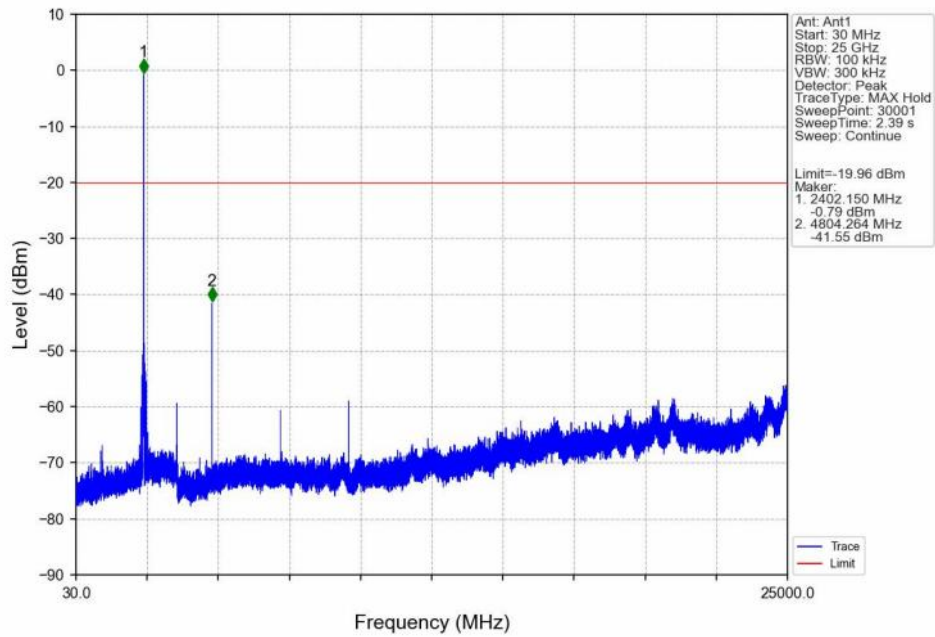


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

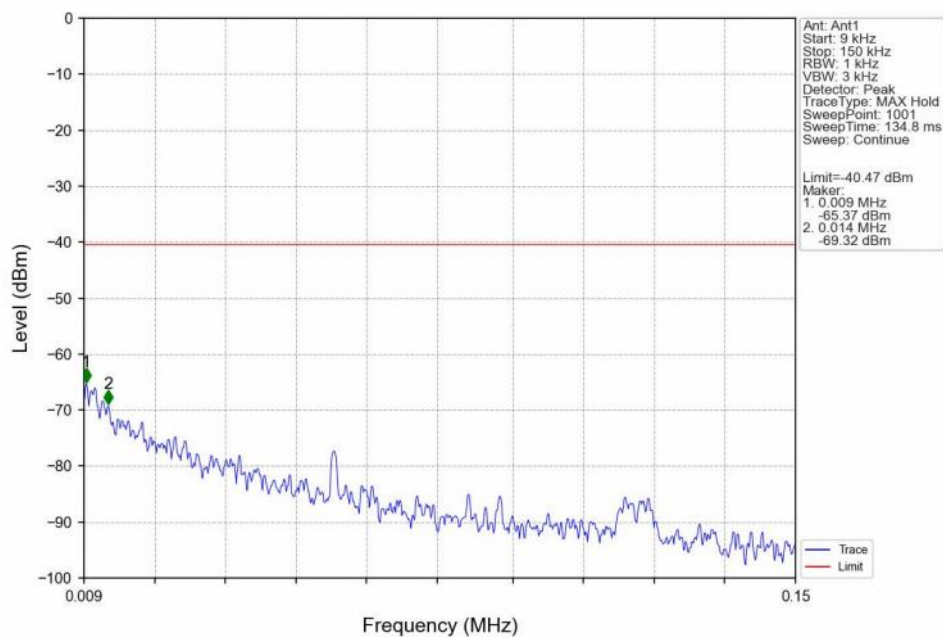


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

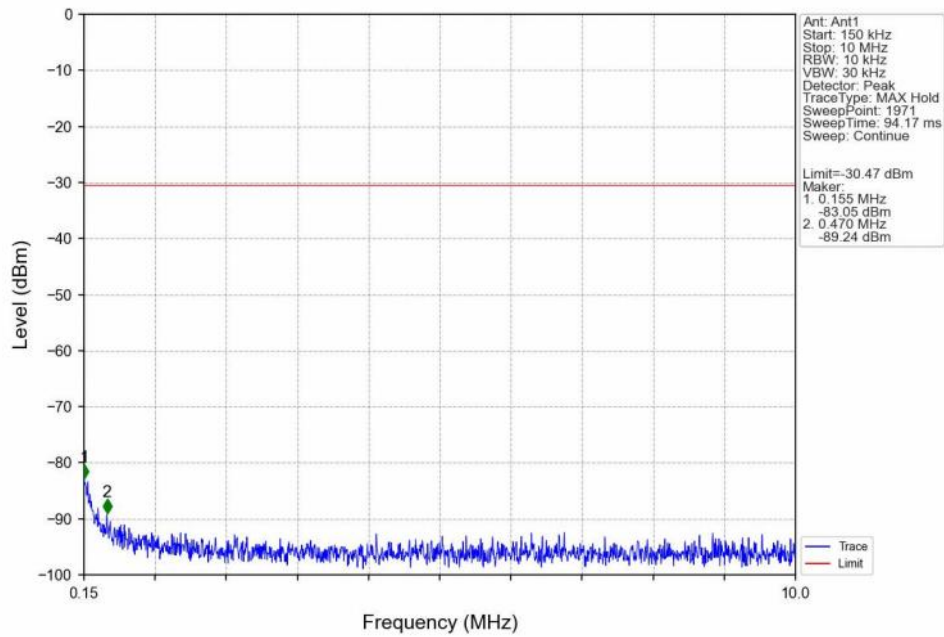


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

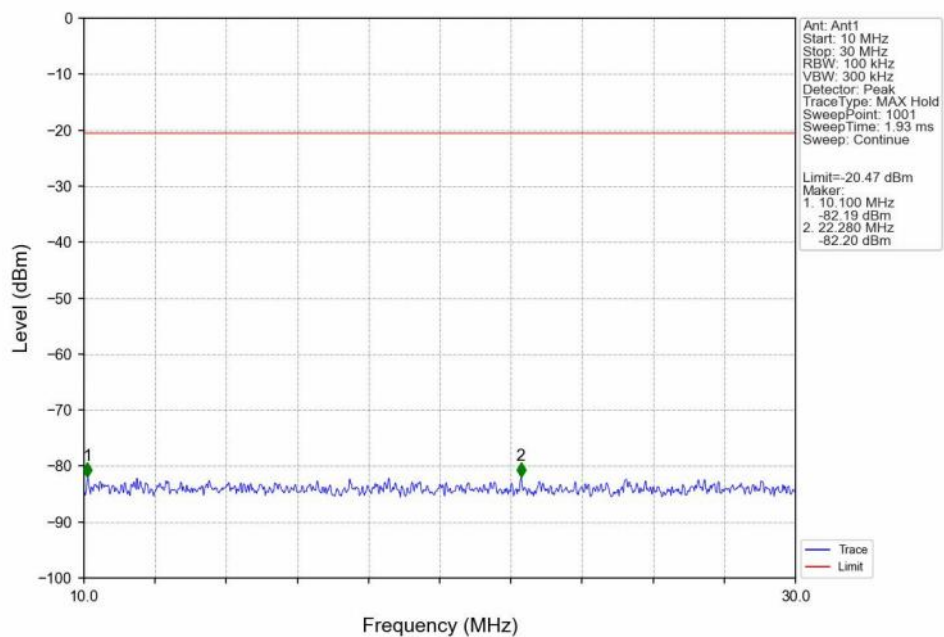


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

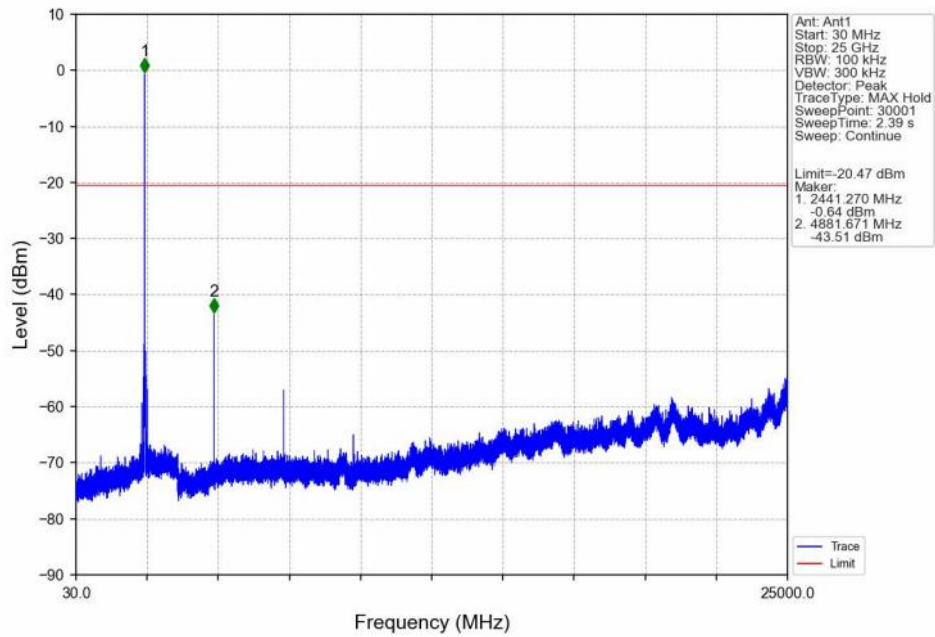


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

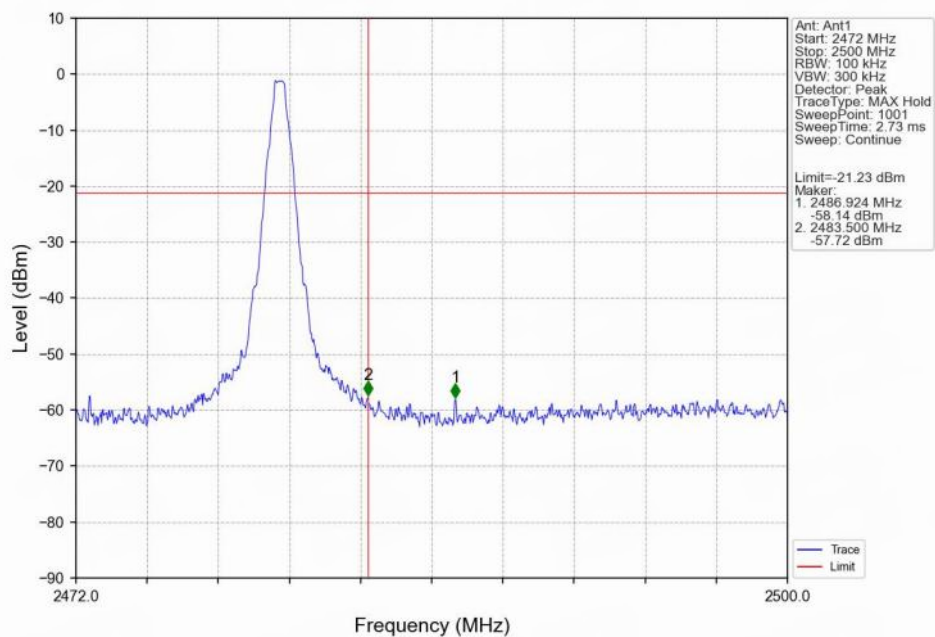


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

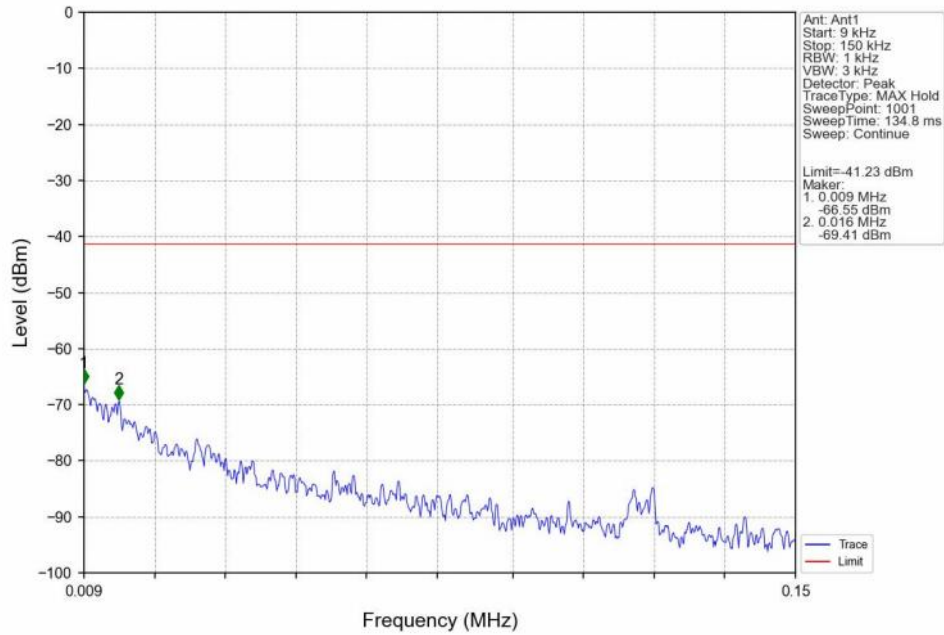


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

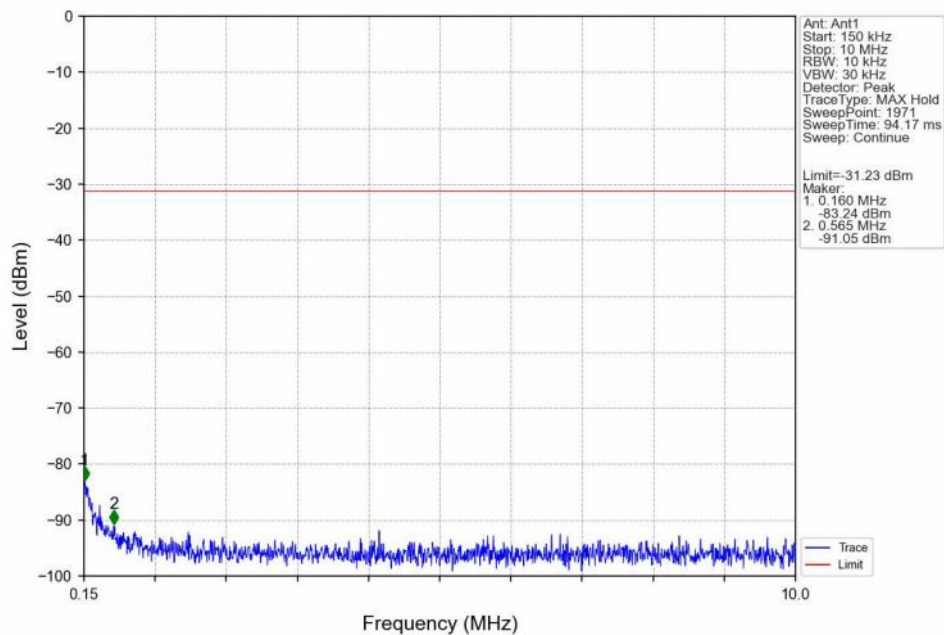


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

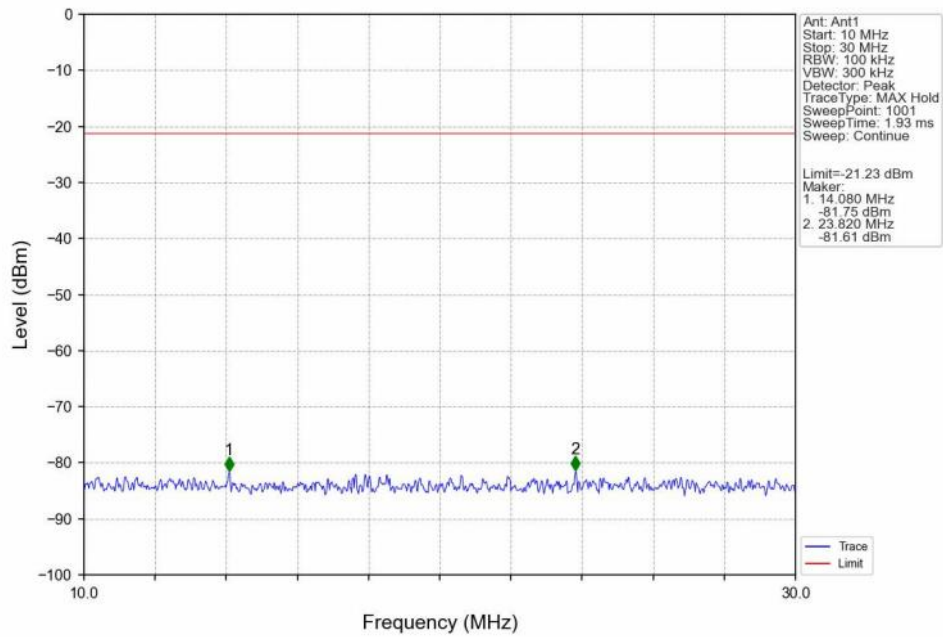


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

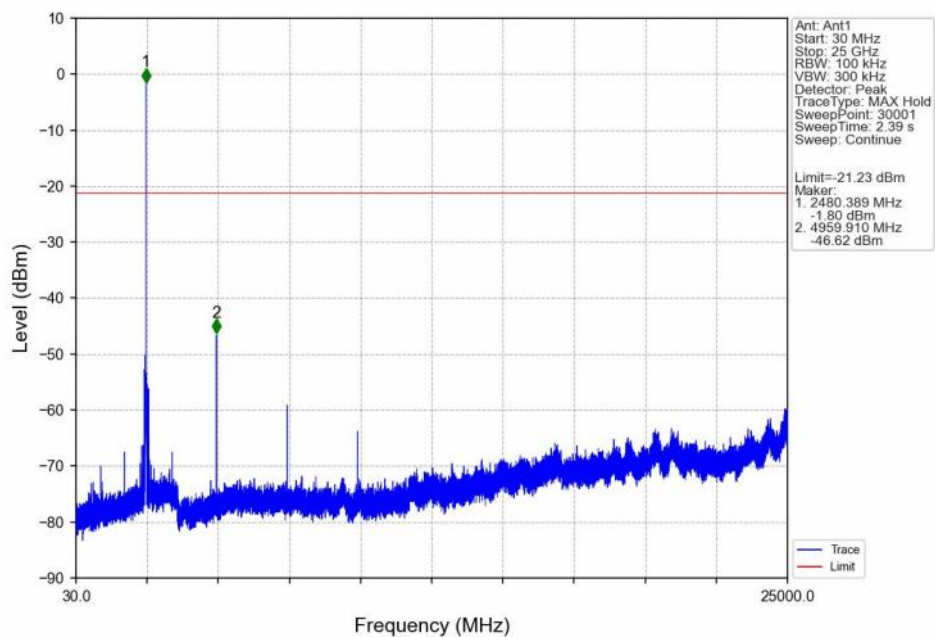


GFSK_DH5_HOPP_Ant1_NTNV

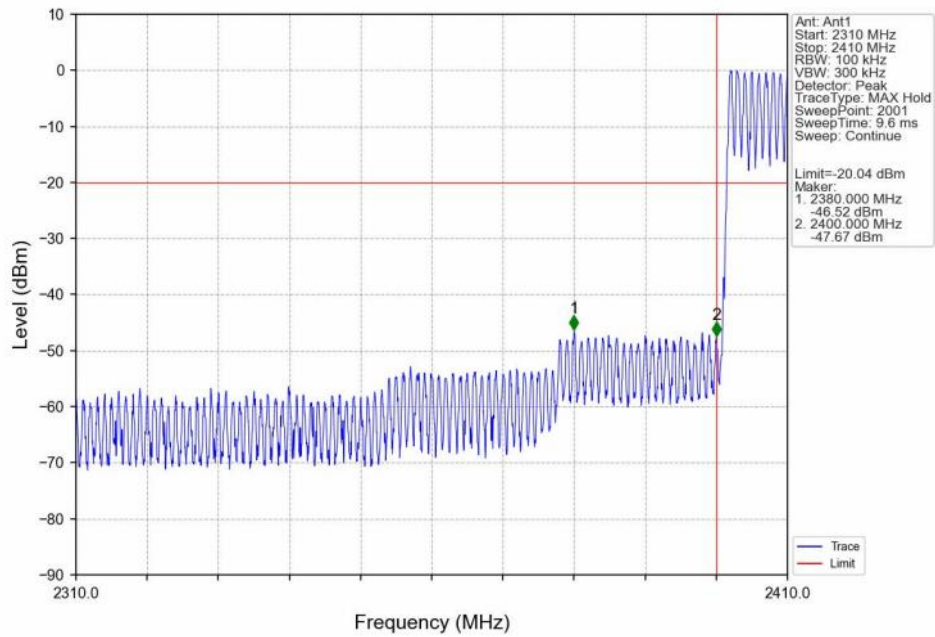


GFSK_DH5_HOPP_Ant1_NTNV

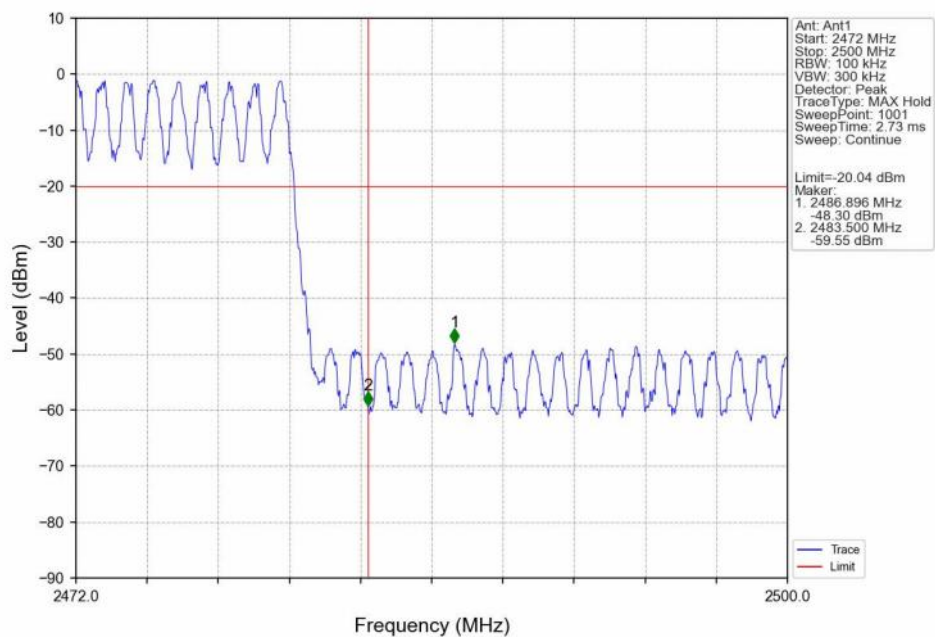


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

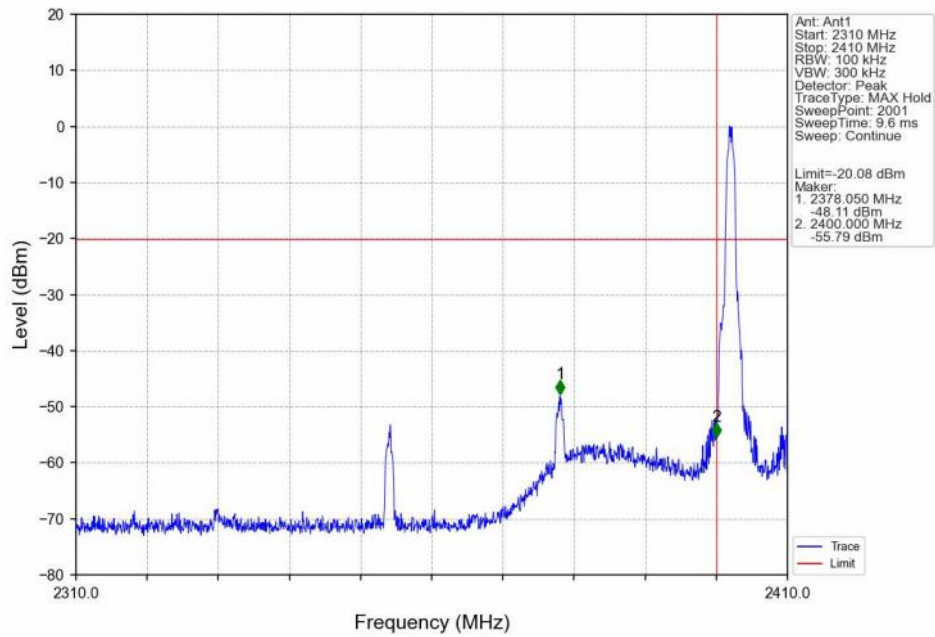


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

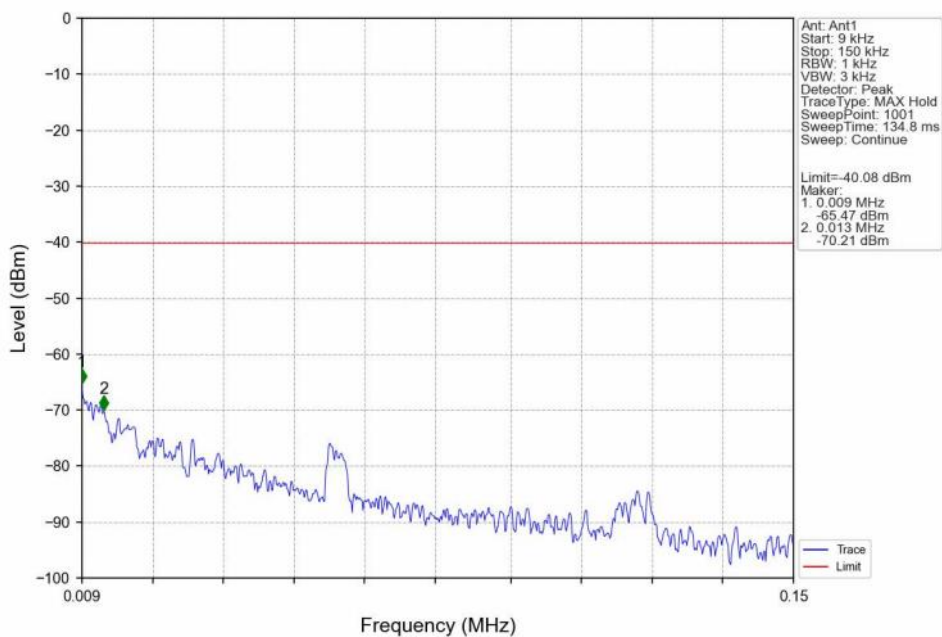


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

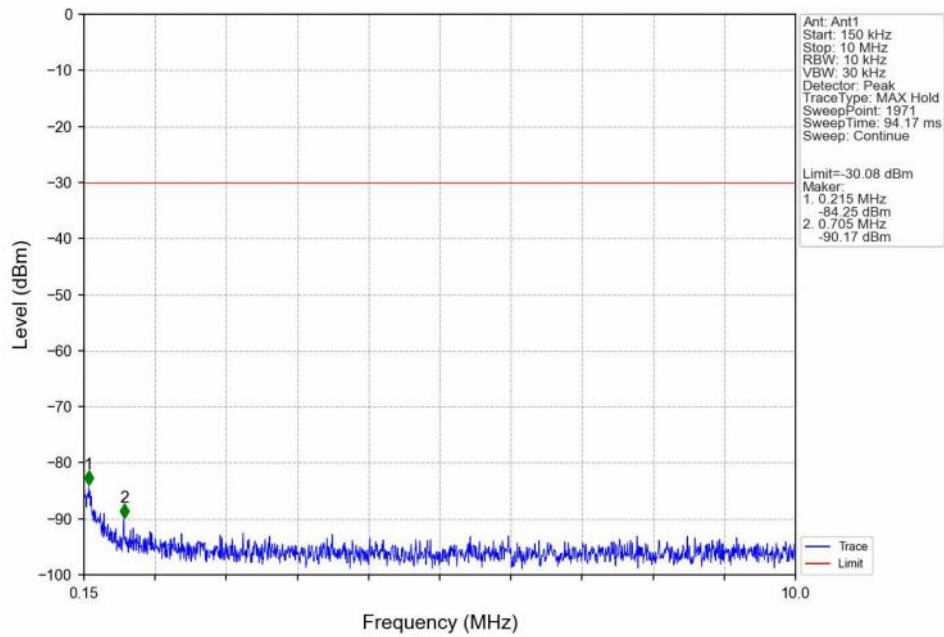


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

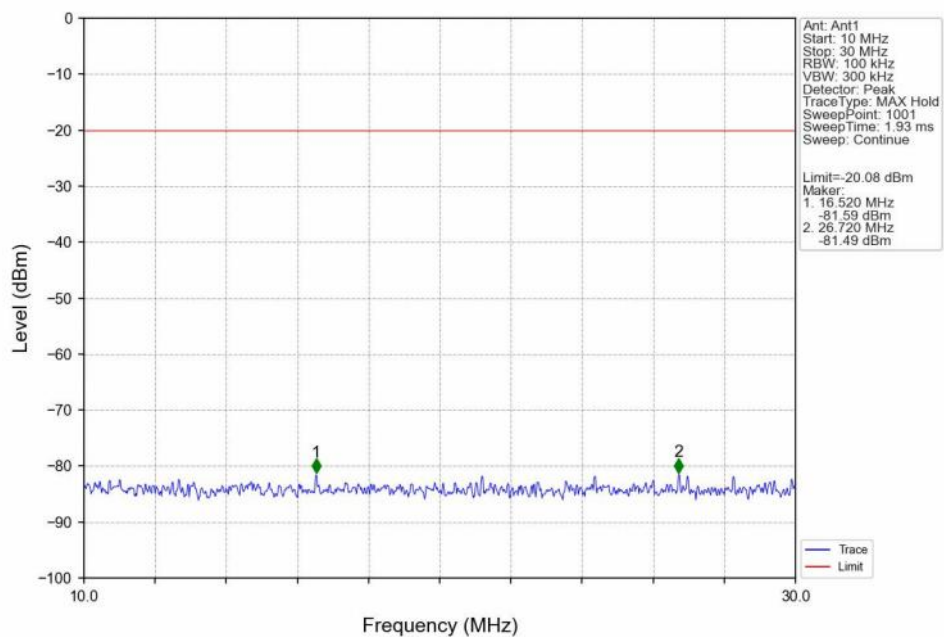


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

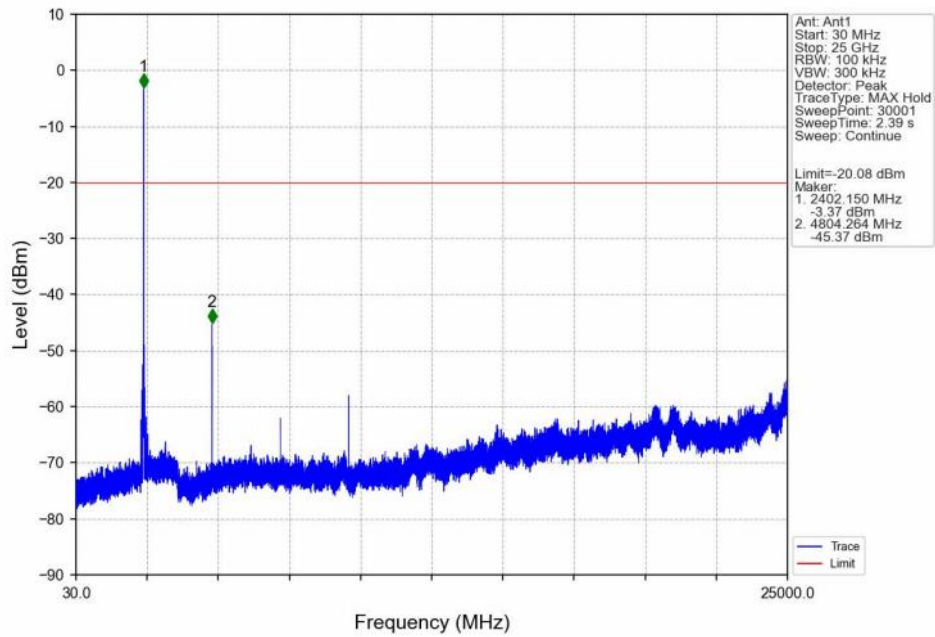


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

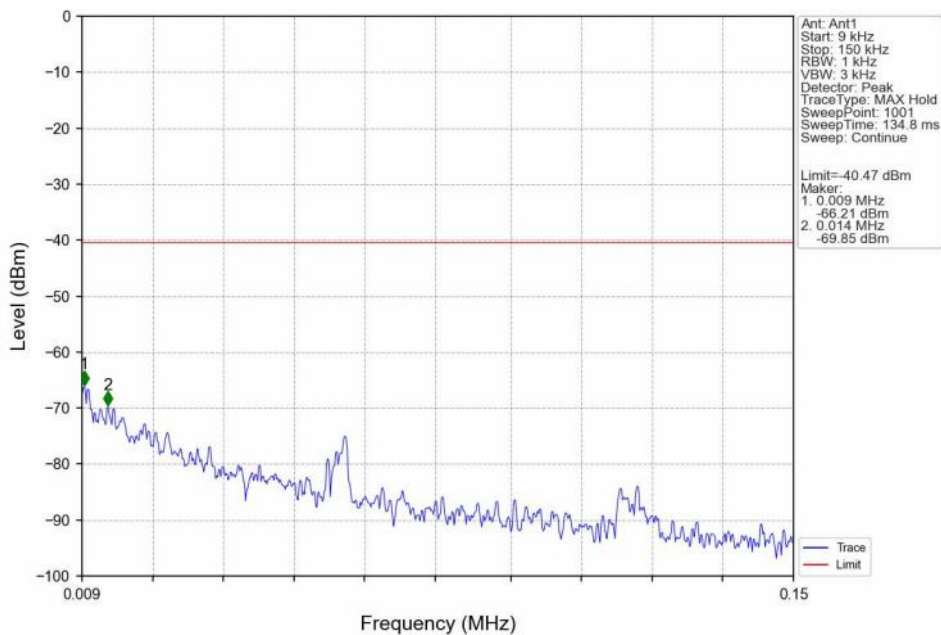


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

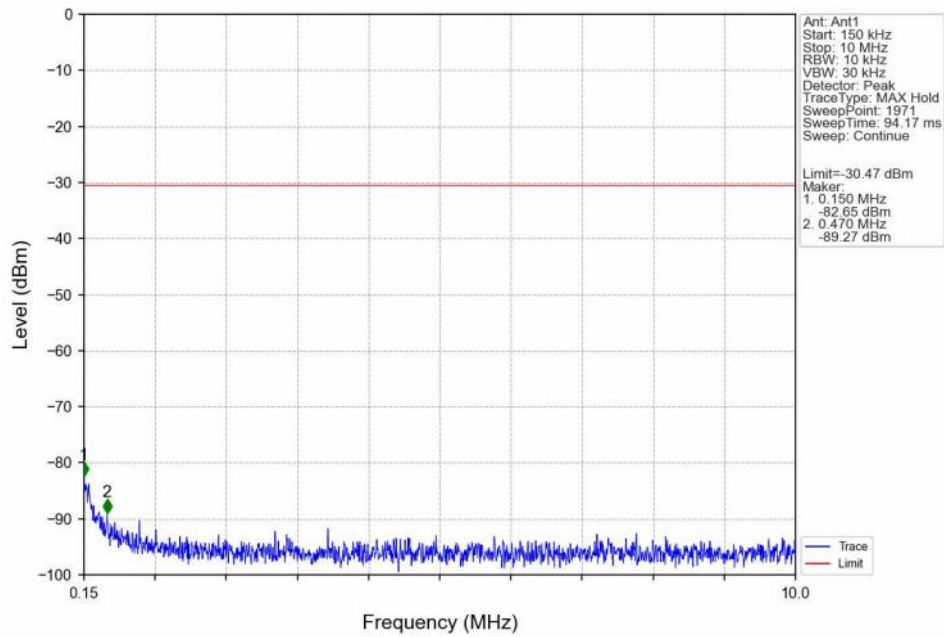


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

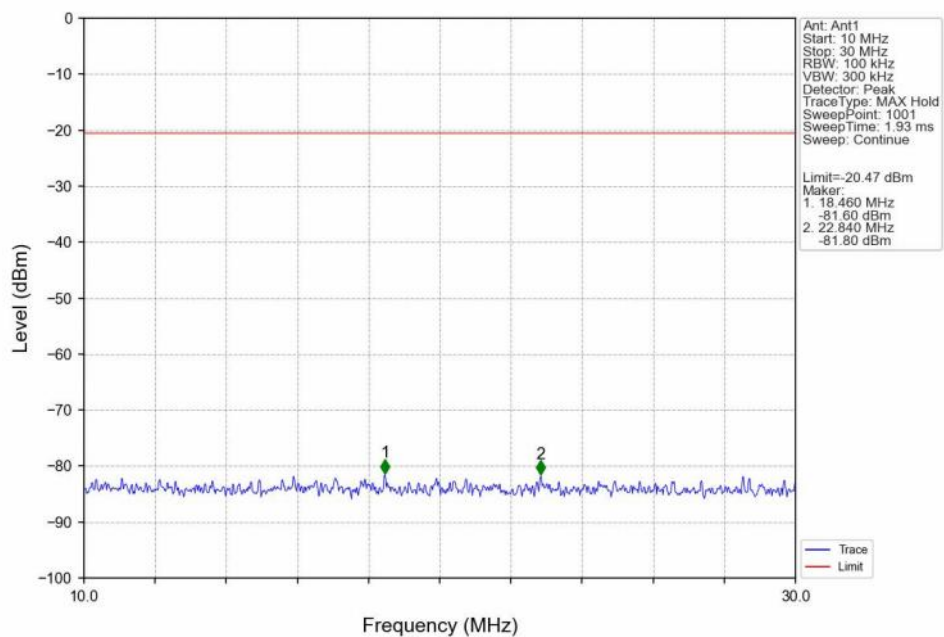


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

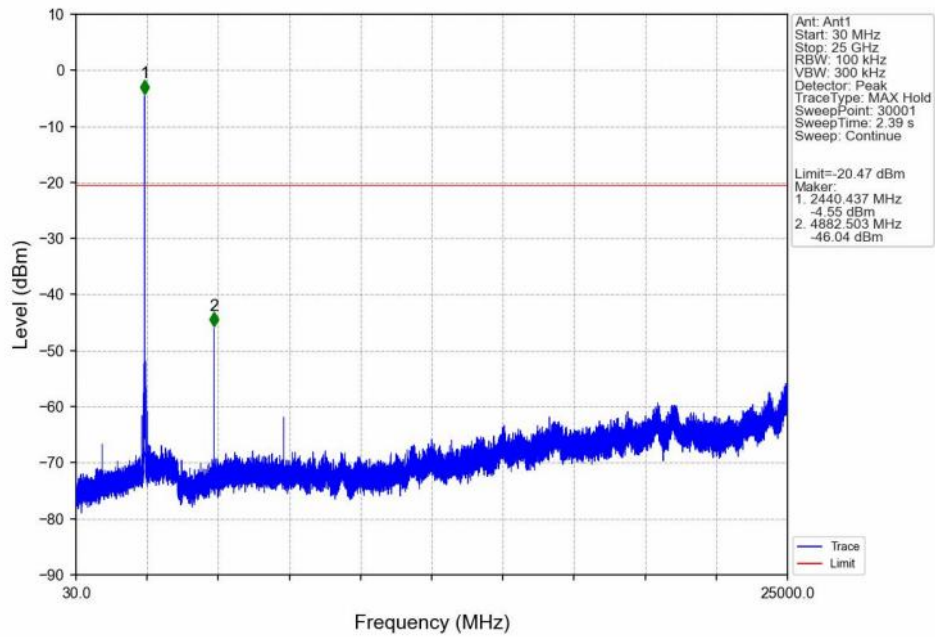


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

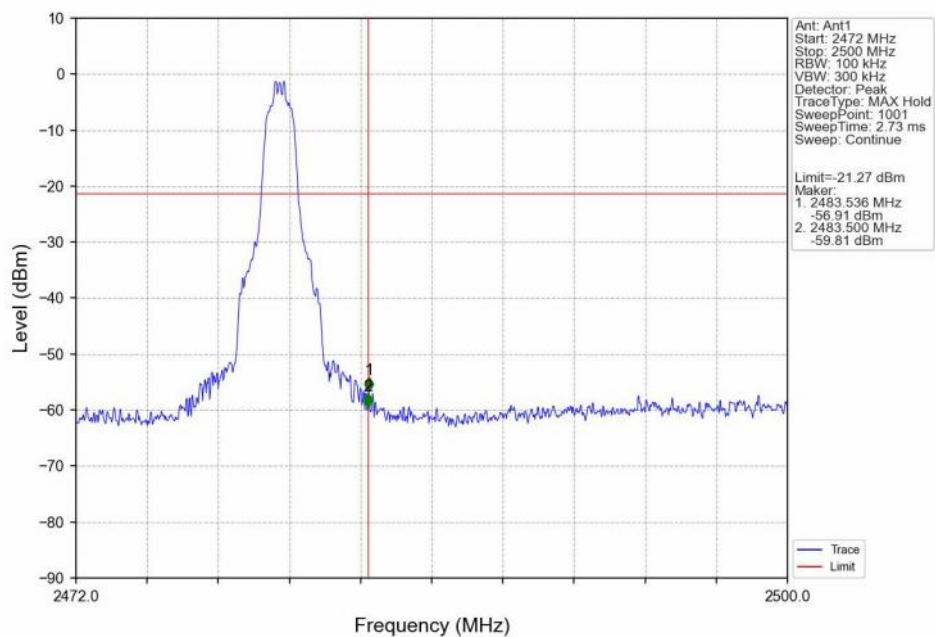


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

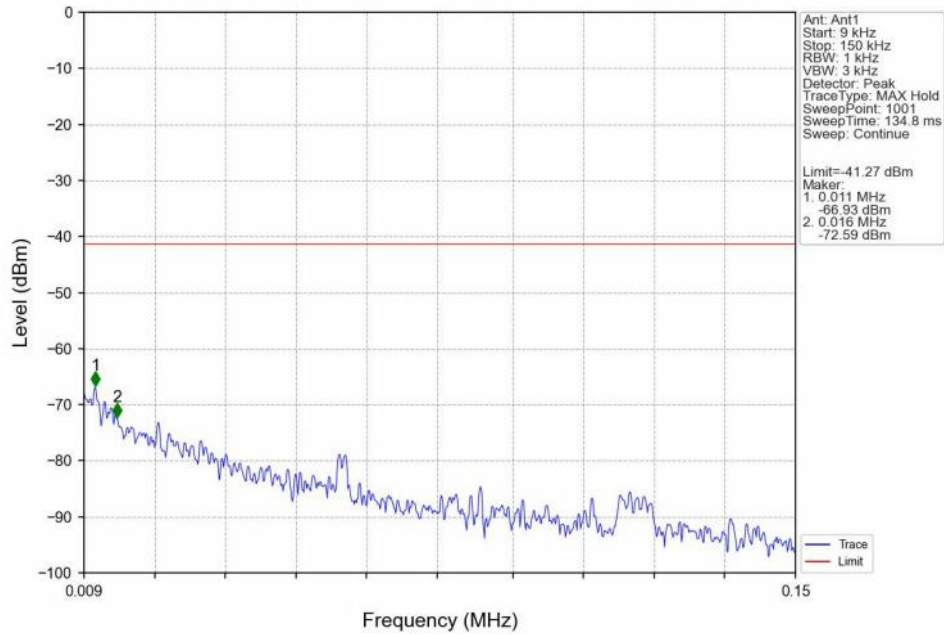


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

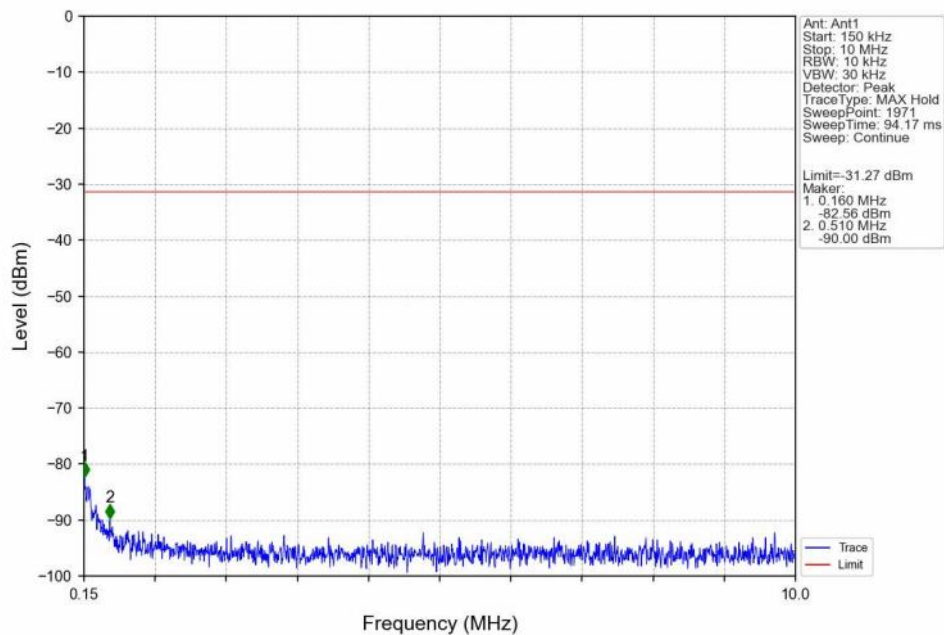


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

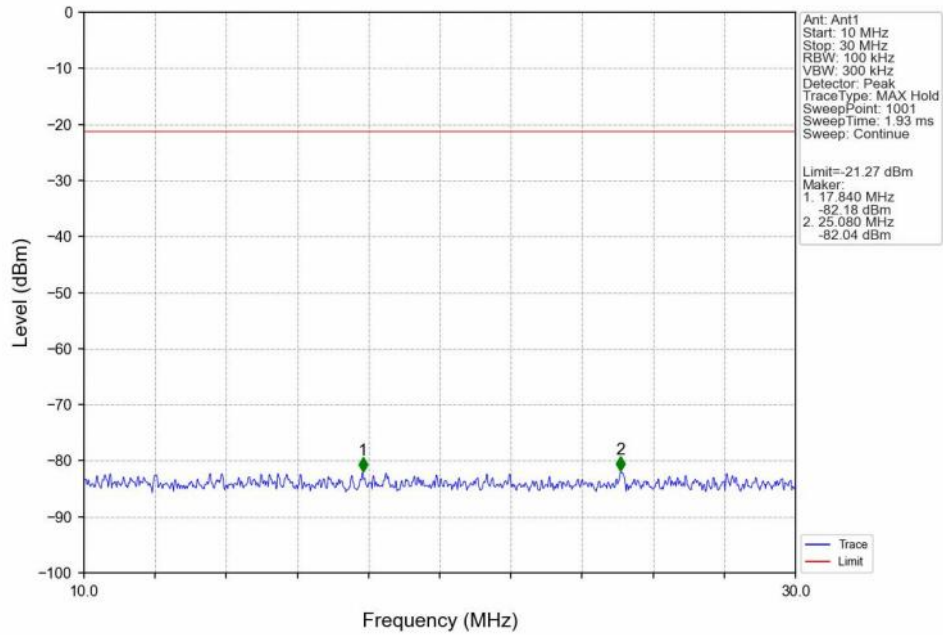


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

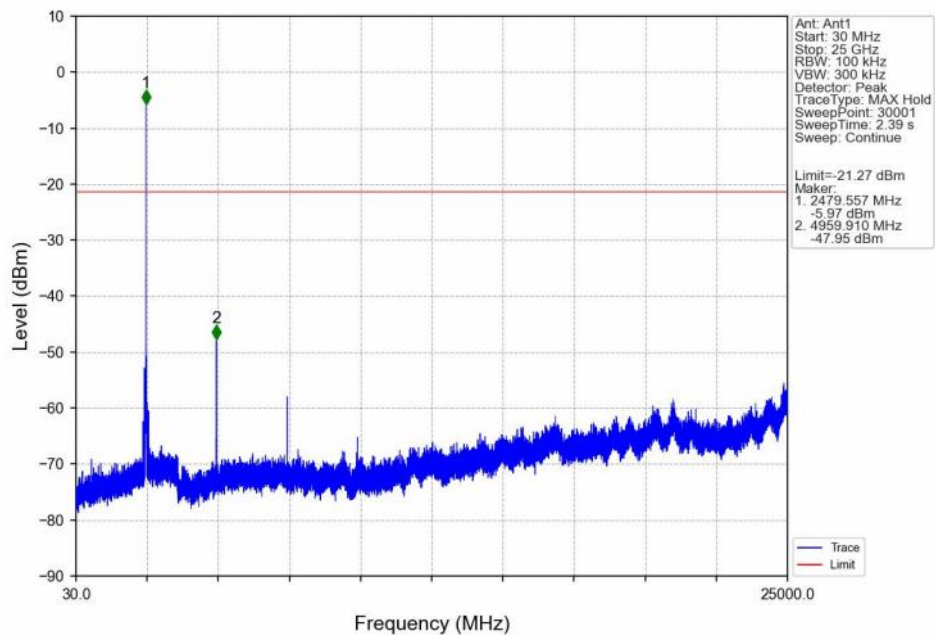


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

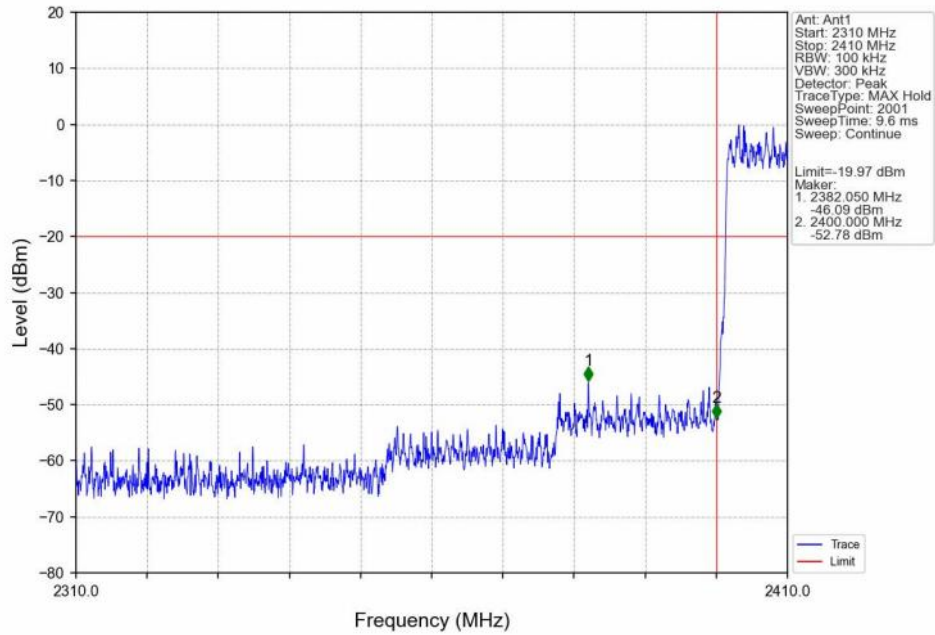


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

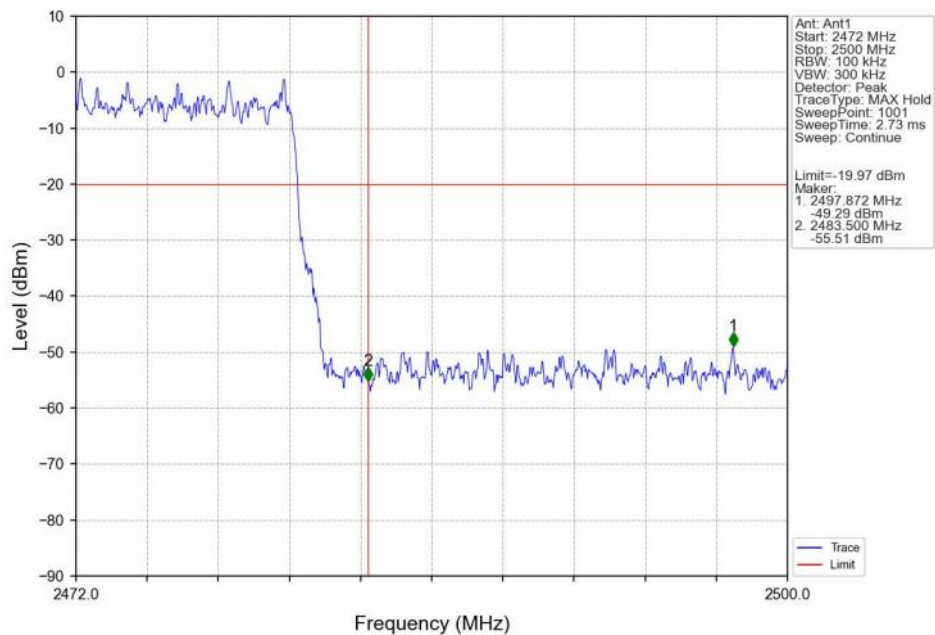


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

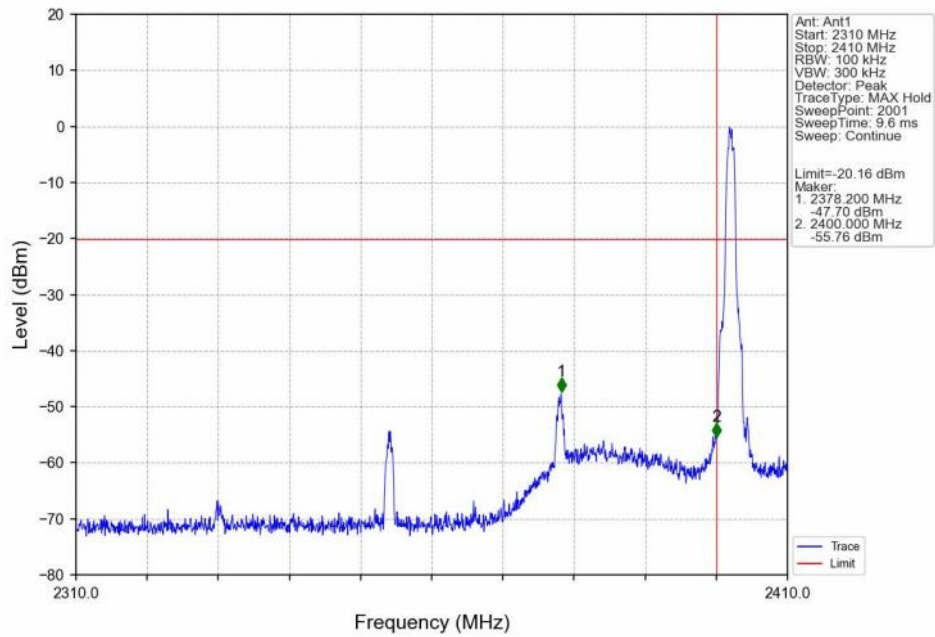


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

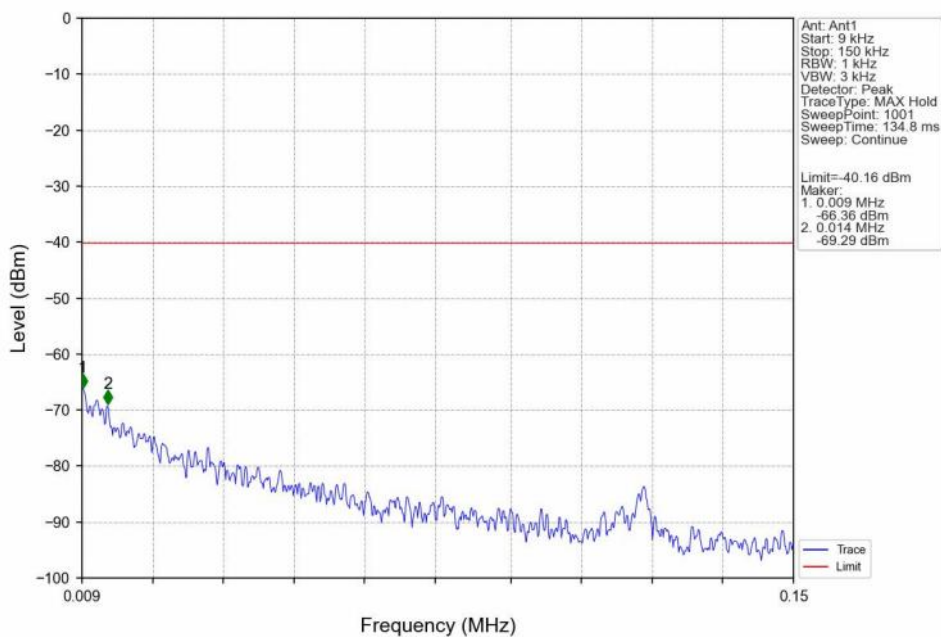


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

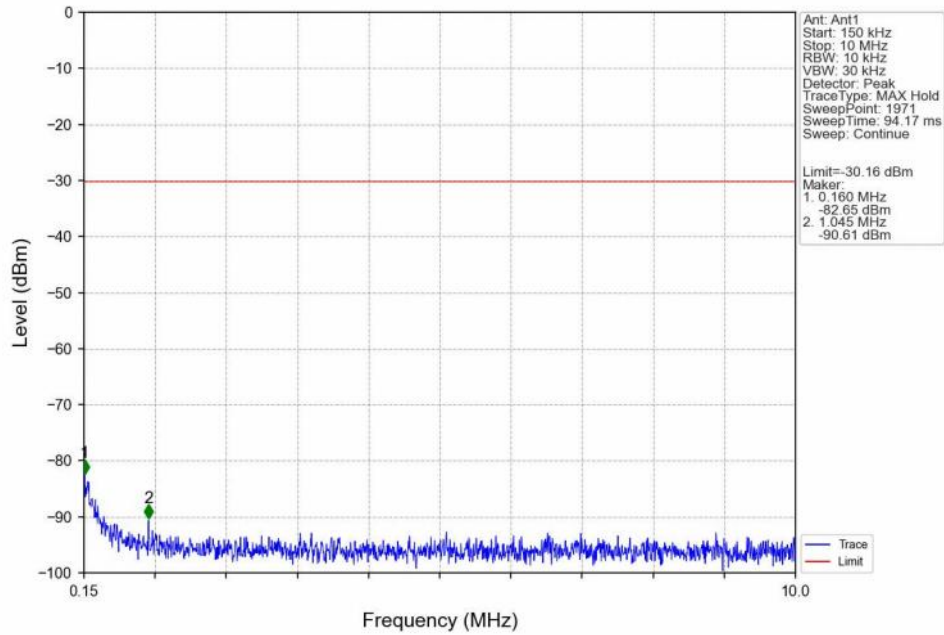


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

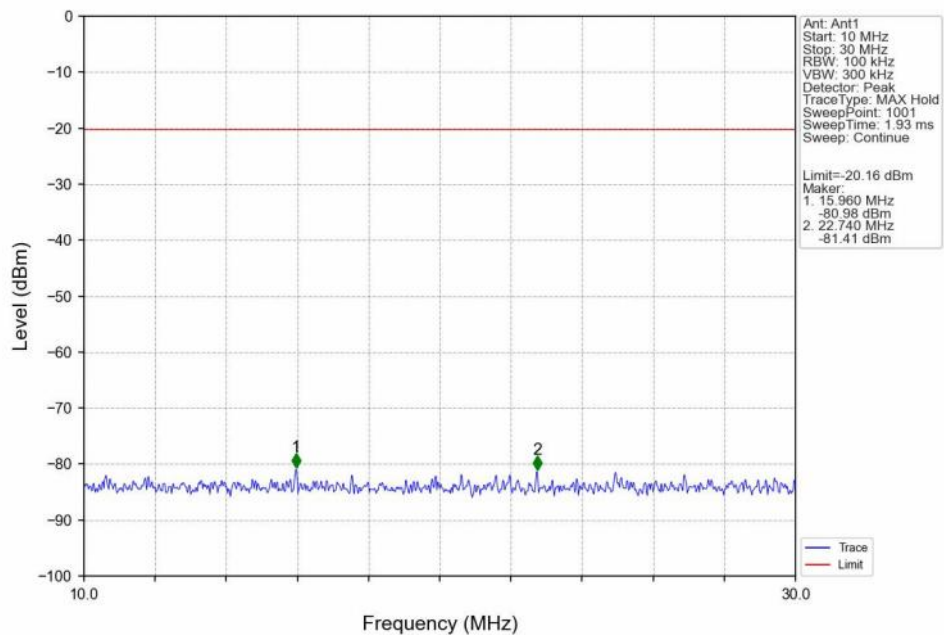


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

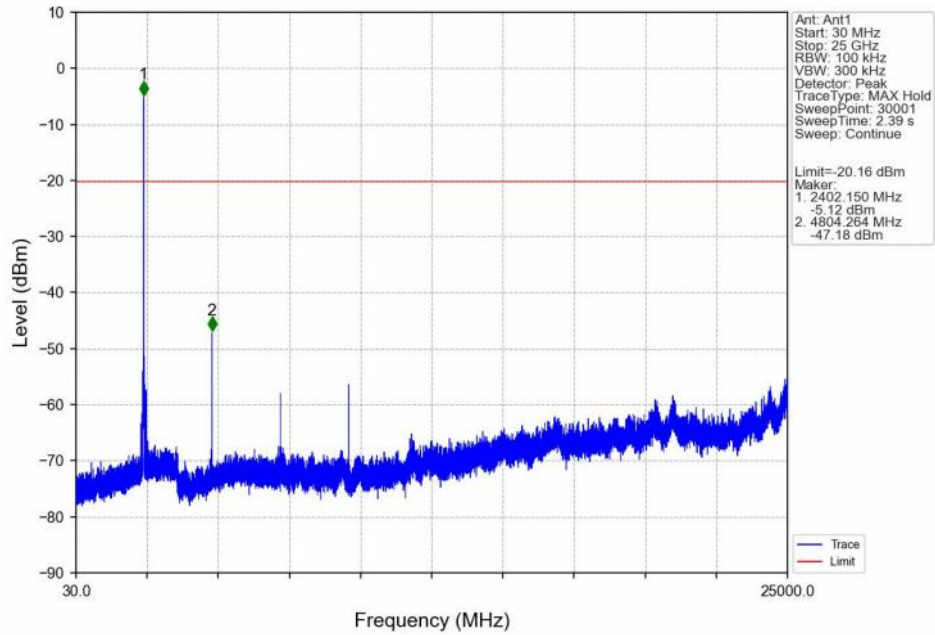


8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

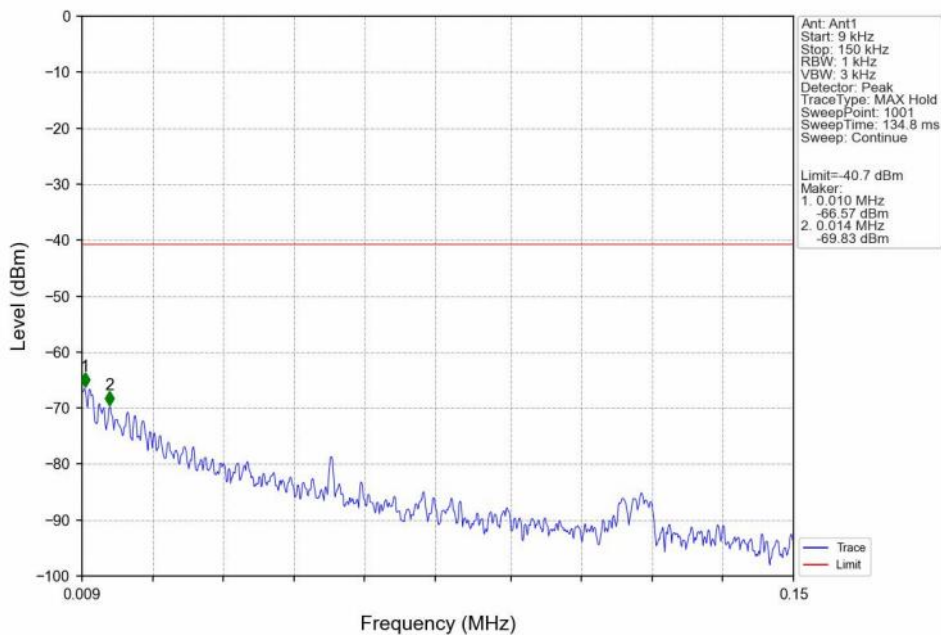


8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

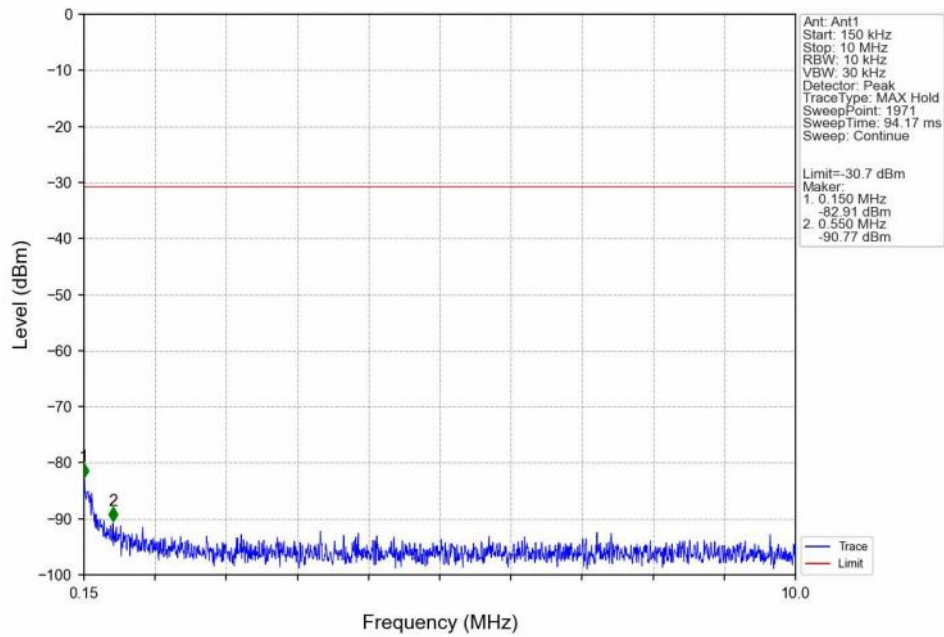


8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

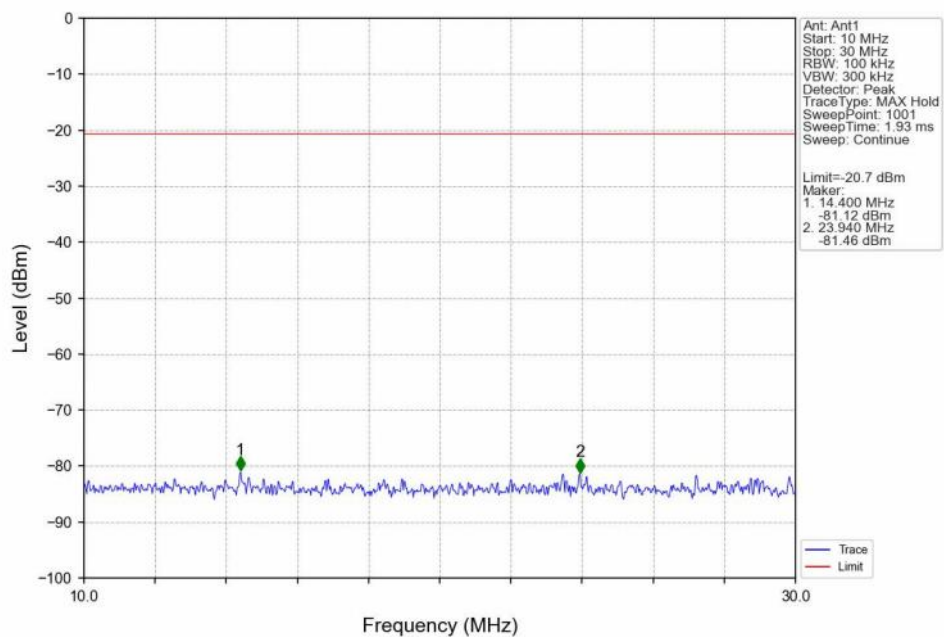


8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

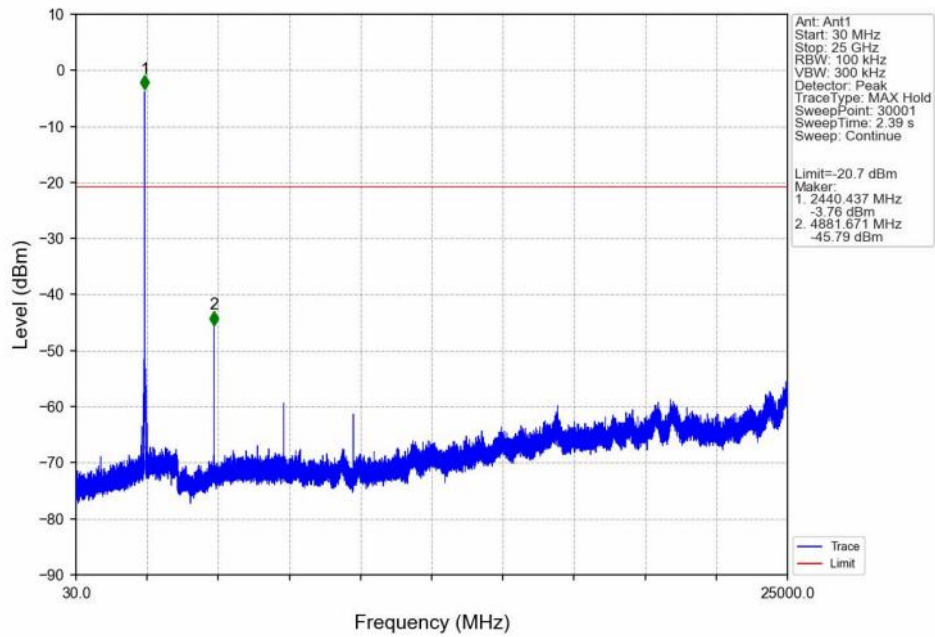


8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

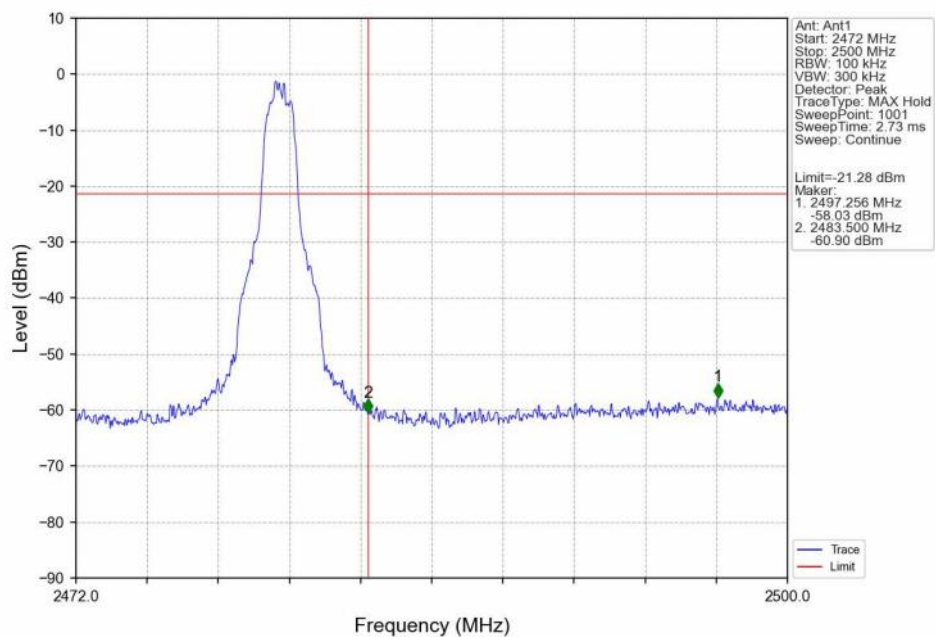


8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

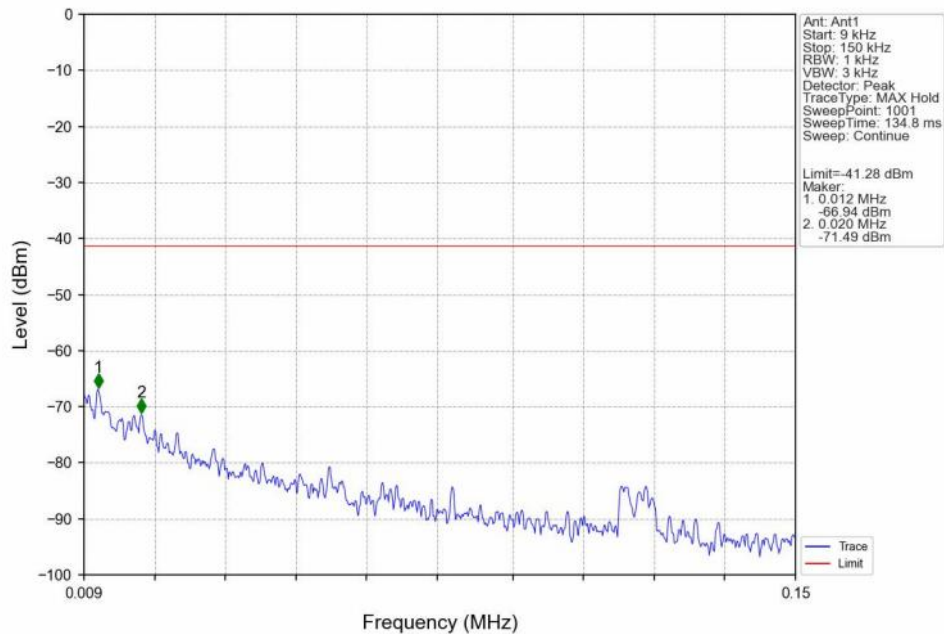


8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

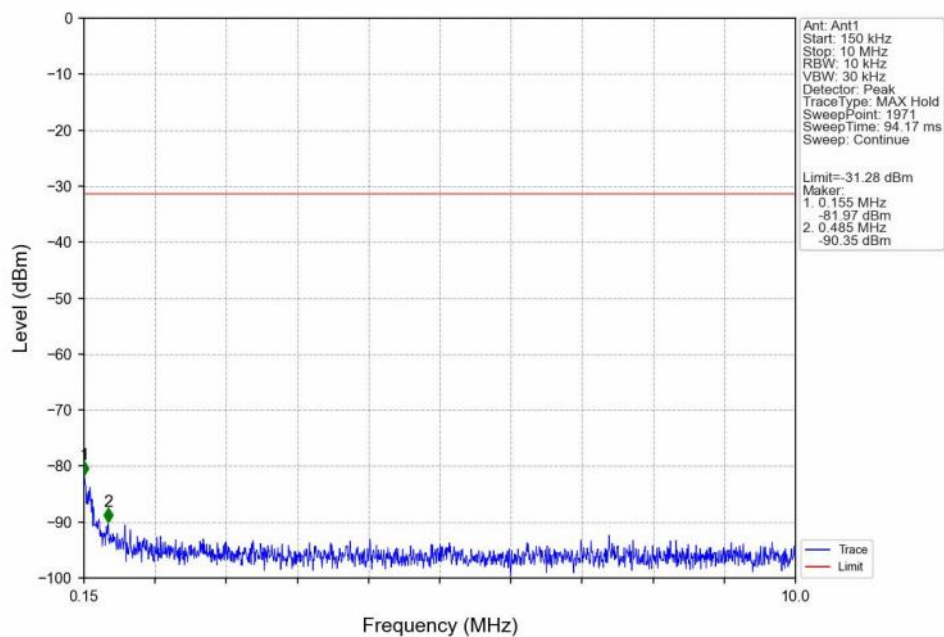


8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

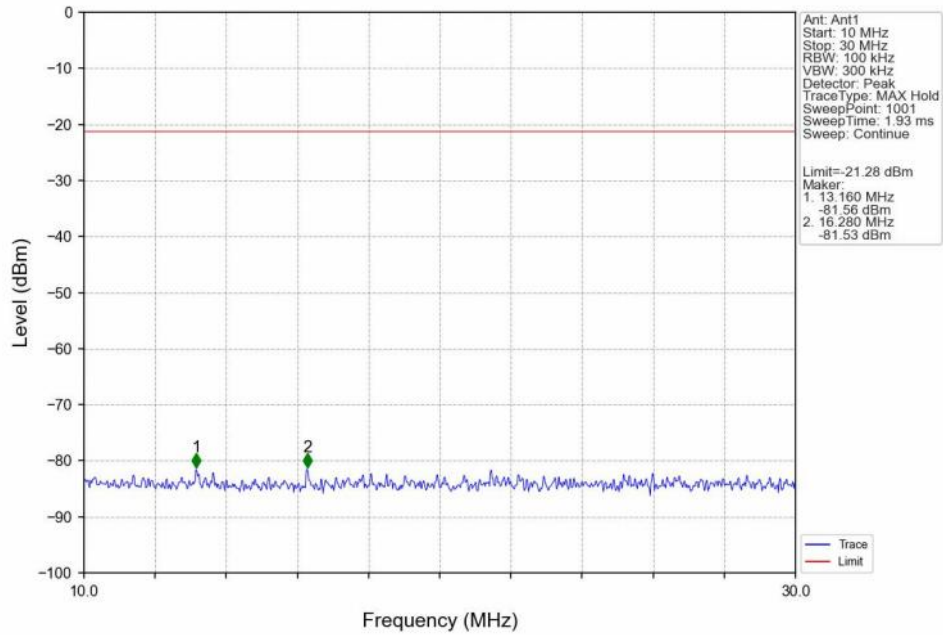


8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

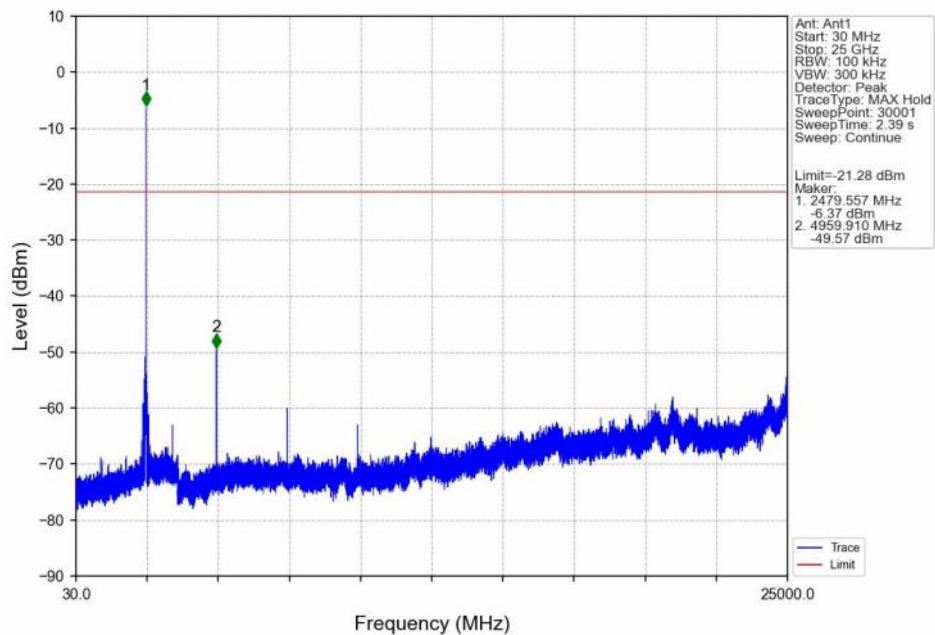

8DPSK_3DH5_HOPP_Ant1_NTNV

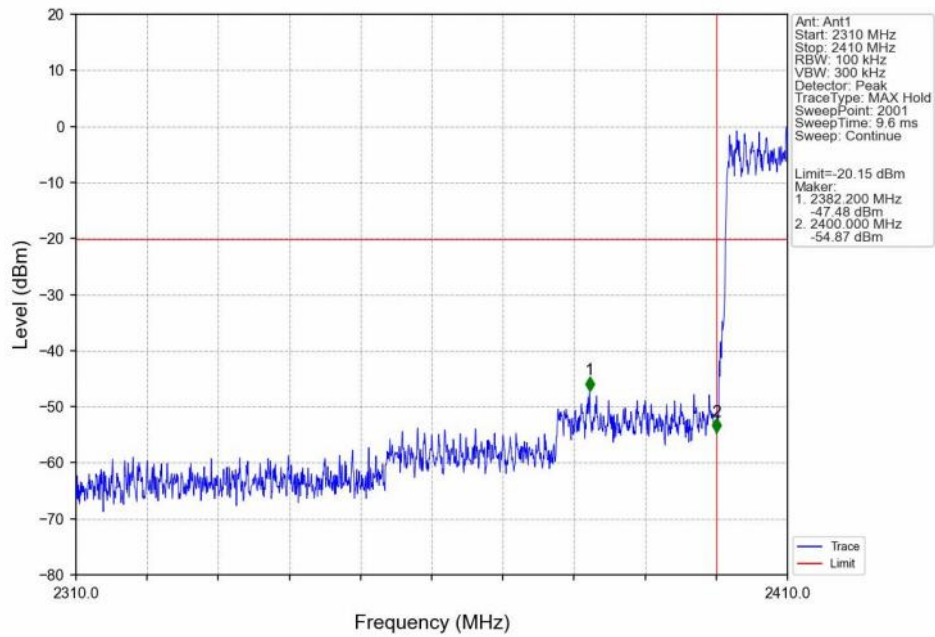

8DPSK_3DH5_HOPP_Ant1_NTNV

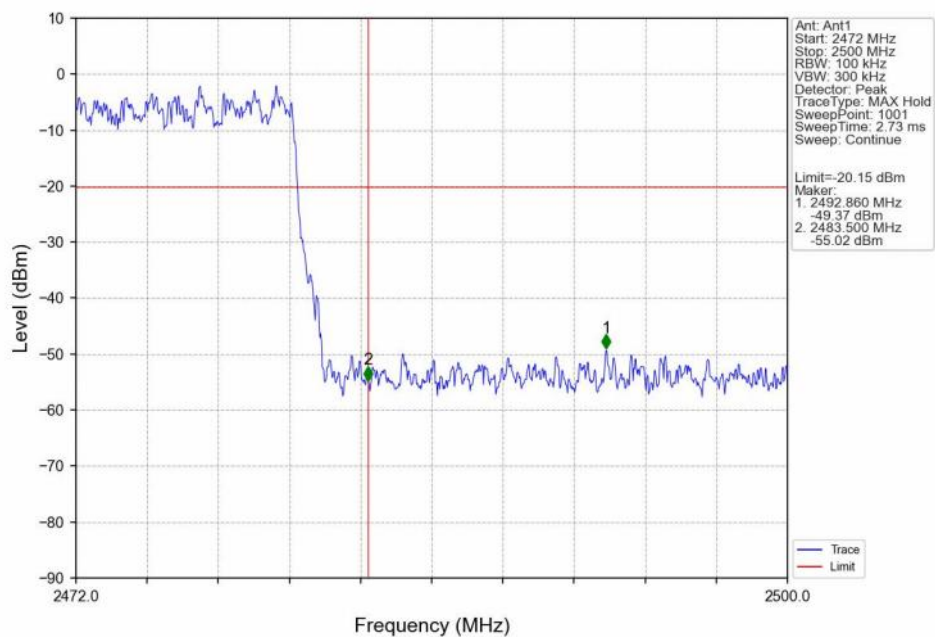

7. Form731

7.1 Test Result

7.1.1 Form731

Lower Freq (MHz)	High Freq (MHz)	MAX Power (W)	MAX Power (dBm)
2402	2480	0.0013	1.29



BTF Testing Lab (Shenzhen) Co., Ltd.

Plant 101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,
Bao'an District, Shenzhen, Guangdong, China

www.btf-lab.com

-- END OF REPORT --