

User manual

Model: V01

I Mobile app tracking

Connect your mobile with WIFI or open data service

1、 Download

(1) Scan QR to download

Coming soon


(2): Apple store search: “Takit GPS”

(3): Google store search: “Takit GPS”


2、 login in

1) After download the app ,Install and open it


2) Click “New user” to login, choose your country and input your mobile number ,click “next” , follow up steps to finish

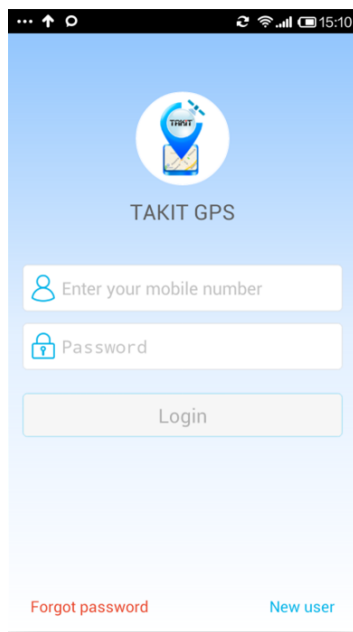

(1)

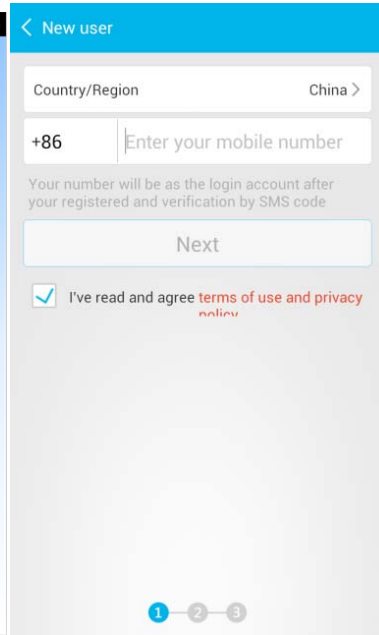


(2)

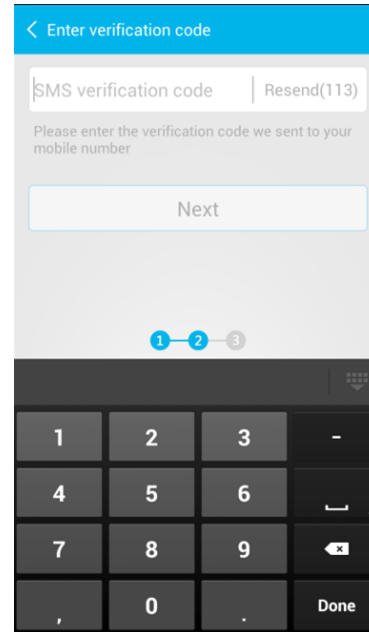

(3)



3、Using

- 1) Input mobile number and password ,click “login”

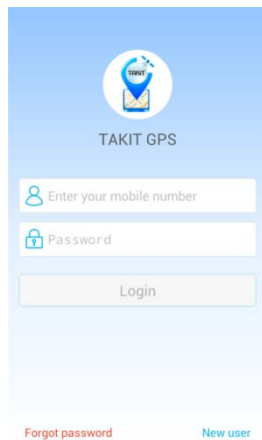

(2) Add watch

After login ,click the icon on the right corner “” to choose “add watch”

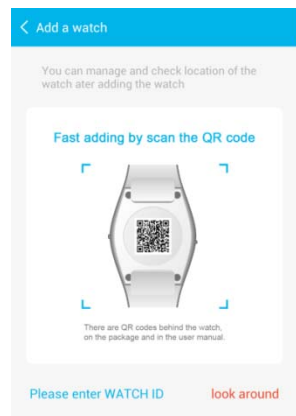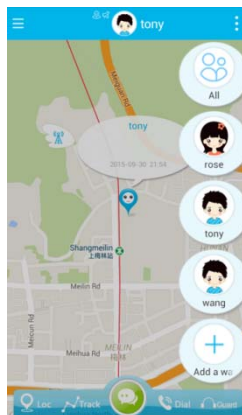

Scan or Input CID number to add the watch

Watch CID number and IMEI number can be checked on the watch.

I: With no SIM card in the watch:

After press “button 3” to lighten the screen ,press “phone button” 3 times to see the WID (IMEI) number
 ,press “ button 3” again to see CID number

II: With SIM card in the watch:

Remote turn off the watch ,then turn on the watch ,before the GSM signal shows up, press “button 3” 3 times quickly
 to see the WID and CID numebers.

After watch find the GSM network ,press “button 3” 3 times only see the phone list numbers.

The first user will be the administrator of the watch

Insert micro SIM card in watch and wait a moment, will see an “E” symbol on watch

“E” symbol : connect to server , if no “E” symbol ,please try another SIM card

4、Main functions

After finish “adding watch”

1) Press icon on the right corner “”,choose the listed watch

(1) press “Loc” to get the current position (Please make sure: 1. The watch is power on with SIM card inside;
 2.The SIM card has sufficient Data; 3. GSM connectivity is normal.)

(2) Press “track” to choose the tracking period ,click “play” to see the routing history. There are three

map version “satellite” ” 2D” ” 3D”

(3) Voice message


①Press “” to enter “voice message” menu ,press “Hold to talk” to record ,Loosen finger to send
(Remark:max 15 seconds to record)

②when there is a voice message come from the watch ,there will be a red point on icon .Press “” to hear .

(4) Press” dial” to enter dial menu,Press call icon to call watch

(5) Press “Guard” to call the watch and it will answer automatically, the guardian can hear the surroundings of the wearer, without being noticed.

2) Press left icon “” to enter the main manu


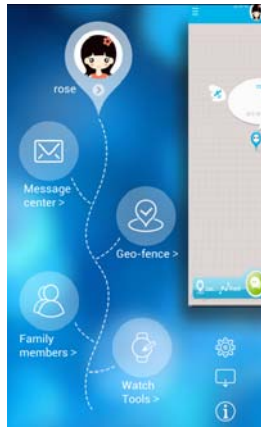


- (1) Press wearer' s picture to enter basic information page, check and modify
- (2) Press “message centre” to check SOS alert , battery low alert , geo fence in/out alert , administration right transfer , guarding the watch , delete the watch etc
- (3) Press “Geo fence” to set area range
- (4) Click” Family members” ,can transfer administration right, cancel guarding , add members , check or modify , delete family member (only the administrator can delete other members)
- (5) Click “Watch tools” to set “remote watch turn off” , “Detach notice” ” Work mode” ” Watch time” “watch tracking” , “Alarm” , “Mute” etc

Pls note : Only Administrator can remote turn off the watch

II. Watch button definition

1、 Watch picture

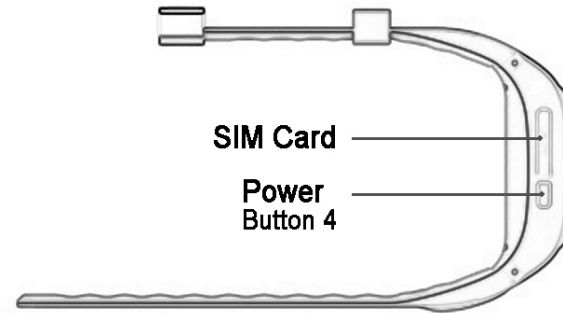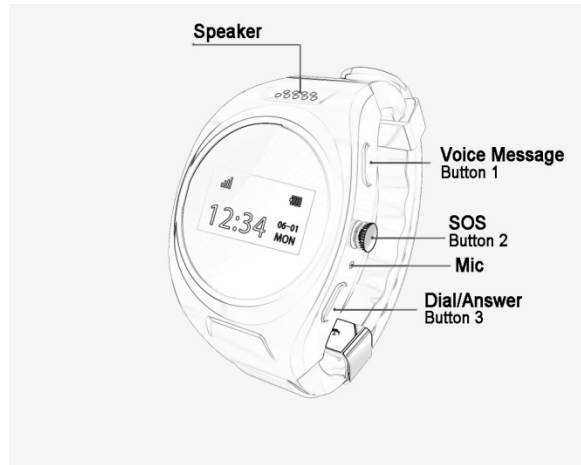

Button 1:Voice Message:Press “button 1” to light the screen , Press again to come to recording phone list

Press to choose the number ,Hold button to record ,Loosen finger to send the voice message to selected number

Button 2:SOS button/pick up and hang up :Emergency calling :Hold SOS button will call SOS numbers automatically for 3 times if no one pick up the phone

When there is a call coming ,press to answer ,press again to hang up


When use button 3 to select numbers ,Hold button 2 can call selected number

Button 3:Dial/Answer : Press “button 3” to light the screen , Press again to enter phone list

Press to choose the phone number ,Hold to call selected number

Button1/Button2/Button3 : A call coming ,press any key to pick up the phone

Button 4:Power /Hang up /Back: Hold to turn on the watch ,Press to Hang up the calling ,
if on submenu, Press to back to time display
Without SIM card ,Hold button can turn off the watch
Display

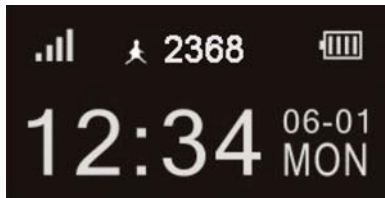

III.Using the watch

1)Insert Micro SIM card

(1)Insert Micro SIM card as picture (make sure SIM card have calling ID display, SMS and sufficient Data service)

Support GSM 2G network ,GSM frequency :850/900/1800/1900

Watch under off status, insert micro SIM card ,Hold “power ” button to turn on the watch



(2) Hold “power button” for 3 seconds to turn on. If Network is normal, it takes about 1-2 minutes to connect the server.

2) Calling

(1) make a call

At standby status

1. Hold “button 1” for about 3 seconds to call administrator
2. Press “button 3” to enter phone list .press to choose number ,Hold “button 2” or “button 3” 3 seconds to dial .Press “ button 2” or “button 4” to hang up the phone .Press “button 4” to exit phone list.

(2) Answer the call

Press “button 1” “button 2” “button 3” to answer the call, press “button 2” or “button 4” to hang up.

(3) SOS call

Hold “button 2” for about 3 seconds, watch will call SOS numbers 3 times in turn till one pick up

4) Voice message

(1) Sending voice message

Watch under standby status ,Press twice “button 1” to enter member list , press to choose the phone number ,Hold button for around 3 seconds to record

① Loosen finger to finish recording and sending to selected members.

Press “button 4” to exit.

②Max recording time is 15 seconds. When reaches the max time it will finish recording automatically and sending. Press “button 4” to back to time display

(2) Listening voice message

When watch gets a voice message, will display “”. Press “button 1” to listen.

Will replay the message for 3 times ,press to end listening

.

IV Charging

1. How to charge

Charge the watch with magnetic cable per picture below. In general, it will take 2-3 hours for fully charge.



2. Charging

- ① First charging above 12 hours, charging above 8 hours twice to guarantee the battery life.
- ② Use good quality adaptor to charge.

V Attentions

1. Do not put the watch under water for a long time
2. Keep away from fire, high temperature environment etc
3. Do not eat the watch.
4. When battery run out, no data service or out of GSM network area, the watch can not be positioned.

VI Questions

(1)Q: Why cannot turn on watch?

A: Please charge fully and try again.

(2)Q: How to turn off the watch?

A: Watch can be remote turned off via APP ,or take the SIM card out ,Hold “button 4” to turn off

(3)Q: Why QR code cannot be scanned?

A: Try again under bright circumstance, or adjust distance between phone and QR.

(4)Q: What system does the APP compatible with?

A: Compatible with IOS7.0 or above, Android 4.0 or above

(5)Q: why some numbers cannot get through when calling the watch number?

A: Only the phone numbers pre-set in the APP can call.

(6)Q: How to transfer administration right?

A: login with administrator’ s account, enter “family member” , Long press selected member ,will come a choice “transfer administration rights ,Press to transfer

(7)Q: How to delete members?

A: login with administrator’ s account, enter “family member” , long press the number and choose “delete” .

(8)Q: Why takes a long time to receive voice messages?

A: the longer the recording time, the longer the downloading time.

Or your Smartphone is under a weak signal environment

(9)Q: How to hear the voice message again?

A: the voice message will repeat for 3 times

FCC STATEMENT:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference,
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

The SAR limit adopted by USA and Canada is 1.6 watts/kilogram (W/kg) averaged over one gram of tissue. The highest SAR value reported to the Federal Communications Commission (FCC) and the Industry Canada (IC) for this device type when it is tested for use at the next to mouth is 0.028W/kg, and that when it is properly worn on the body is 0.936W/kg. The device complies with the RF specifications when the device is used next to mouth or at a distance of 0 mm from your body. Ensure that the device accessories such as a device case and a device holster are not composed of metal components. Keep your device 0 mm away from your body to meet the requirement earlier mentioned.

This device was tested for typical body-worn operations. To comply with RF exposure requirements, a minimum separation distance of 0 mm must be maintained between the user's body and the handset, including the antenna. Third-party belt-clips, holsters, and similar accessories used by this device should not contain any metallic components. Body-worn accessories that do not meet these requirements may not comply with RF exposure requirements and should be avoided. Use only the supplied or an approved antenna.