


Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Vertical

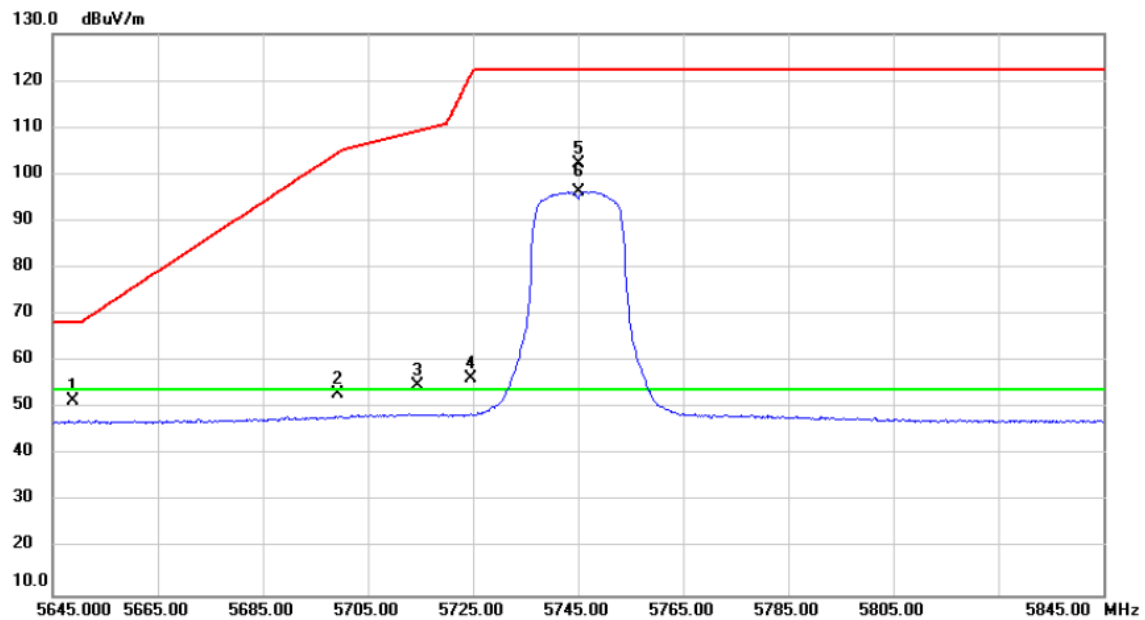

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5648.955	13.15	38.33	51.48	68.20	-16.72	peak	
2		5699.250	14.64	38.46	53.10	104.64	-51.54	peak	
3		5714.400	16.34	38.50	54.84	109.23	-54.39	peak	
4		5724.705	17.87	38.53	56.40	121.53	-65.13	peak	
5		5745.000	63.68	38.58	102.26	122.20	-19.94	peak	No Limit
6	*	5745.000	57.72	38.58	96.30	54.00	42.30	A/VG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Vertical

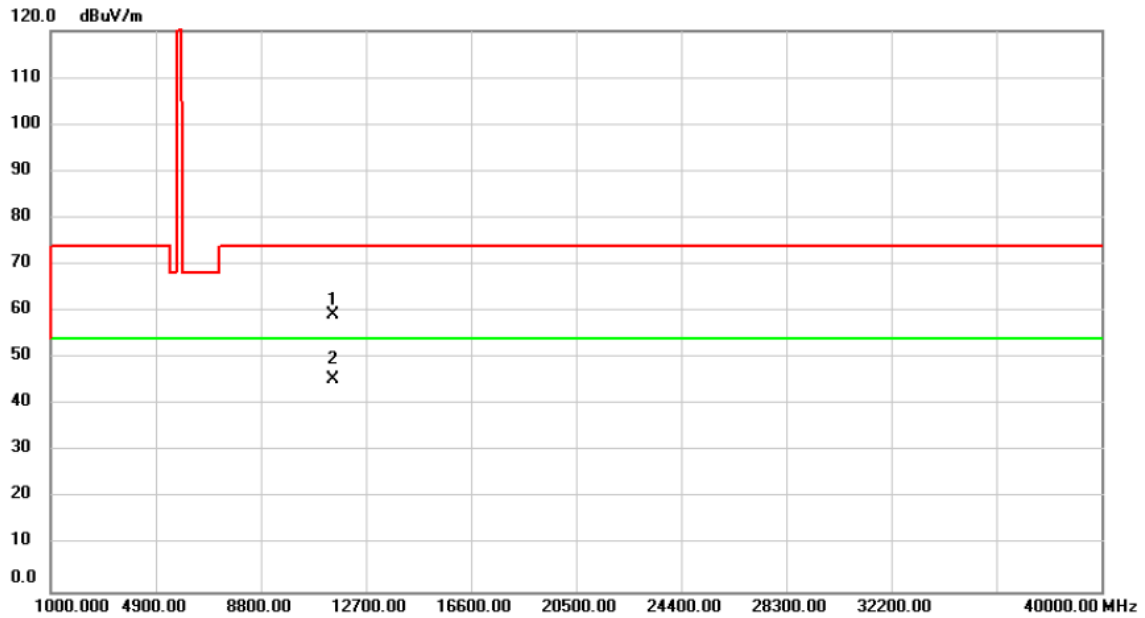

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.00	55.89	3.40	59.29	74.00	-14.71	peak	
2 *	11490.00	42.15	3.40	45.55	54.00	-8.45	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Horizontal

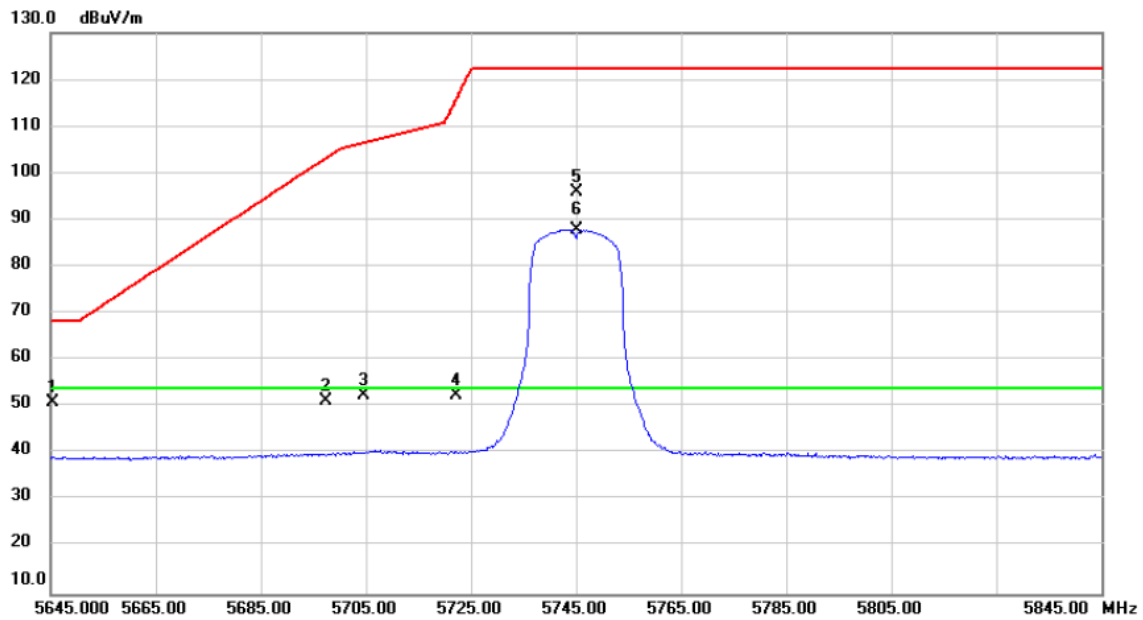

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5645.465	12.59	38.31	50.90	68.20	-17.30	peak	
2	5697.400	12.74	38.46	51.20	103.28	-52.08	peak	
3	5704.700	14.09	38.48	52.57	106.52	-53.95	peak	
4	5722.110	14.07	38.53	52.60	115.61	-63.01	peak	
5	5745.000	57.29	38.58	95.87	122.20	-26.33	peak	No Limit
6 *	5745.000	49.31	38.58	87.89	54.00	33.89	A/G	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Horizontal

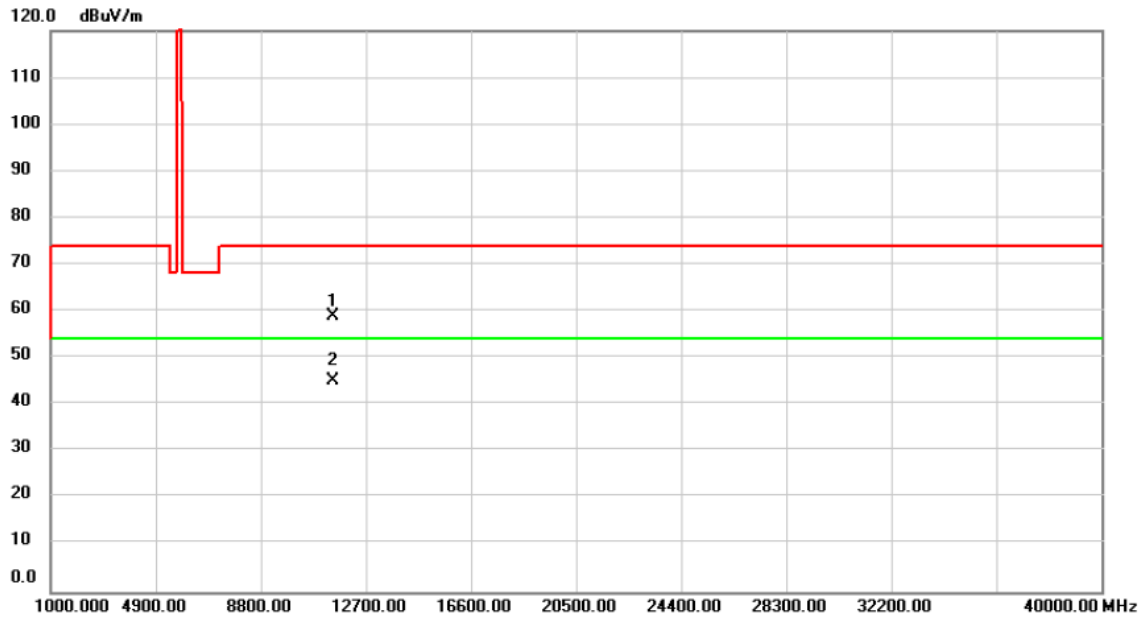

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.00	55.67	3.40	59.07	74.00	-14.93	peak	
2 *	11490.00	41.87	3.40	45.27	54.00	-8.73	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Vertical

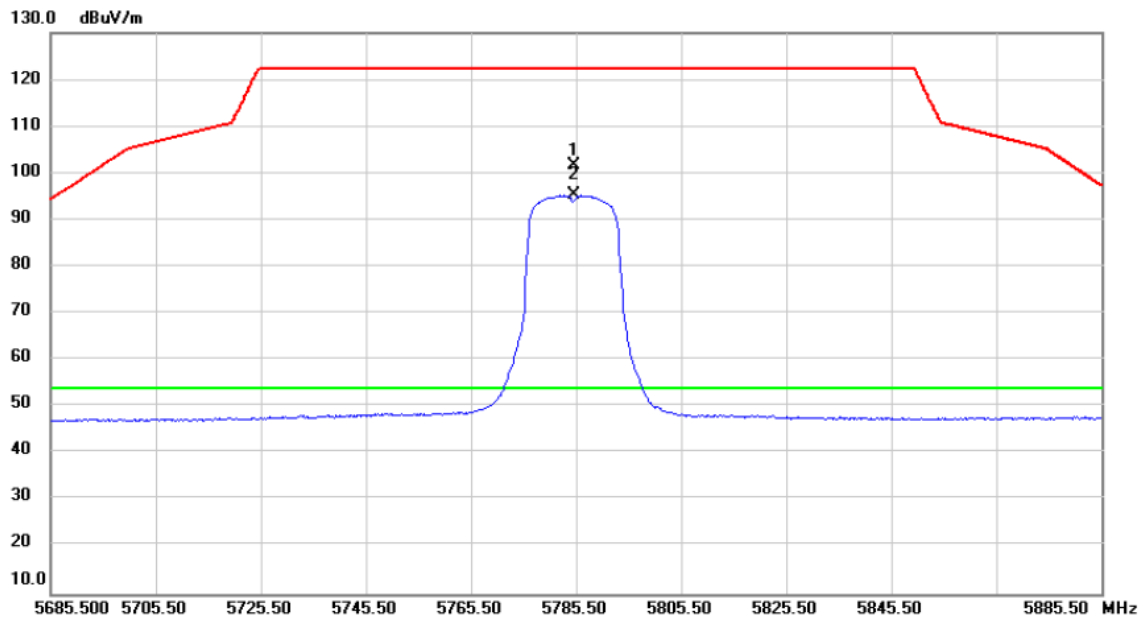

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5785.000	62.83	38.70	101.53	122.20	-20.67	peak	No Limit
2	*	5785.000	56.57	38.70	95.27	54.00	41.27	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Vertical

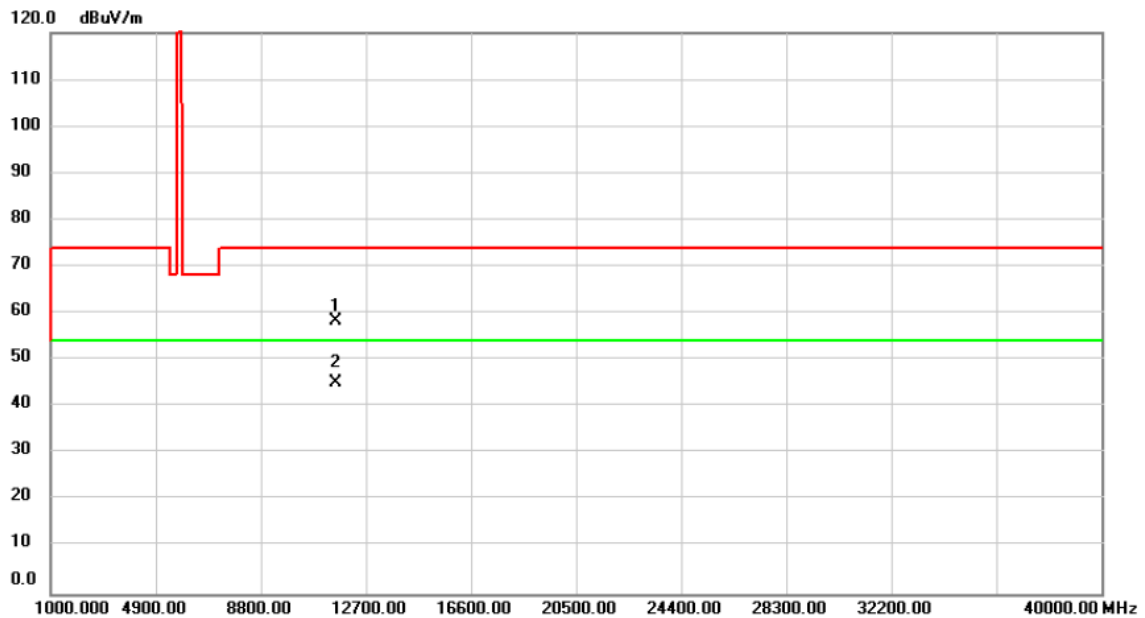

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	54.99	3.28	58.27	74.00	-15.73	peak	
2	*	11570.00	41.81	3.28	45.09	54.00	-8.91	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Horizontal

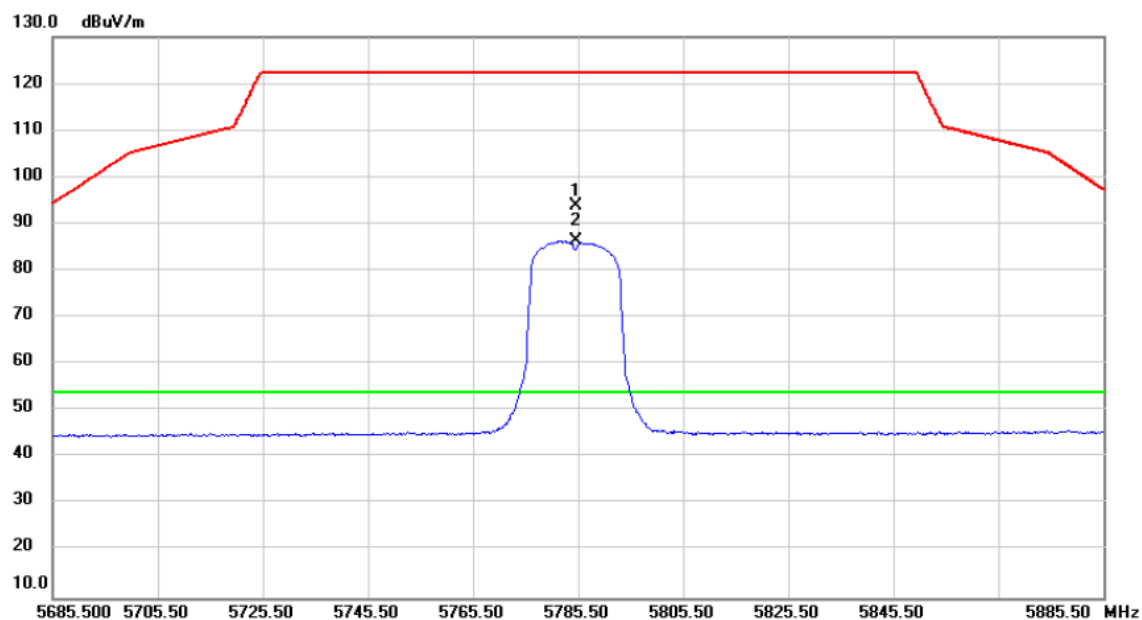

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5785.000	55.28	38.70	93.98	122.20	-28.22	peak	No Limit
2	*	5785.000	47.57	38.70	86.27	54.00	32.27	AVG	No Limit


Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz

Horizontal

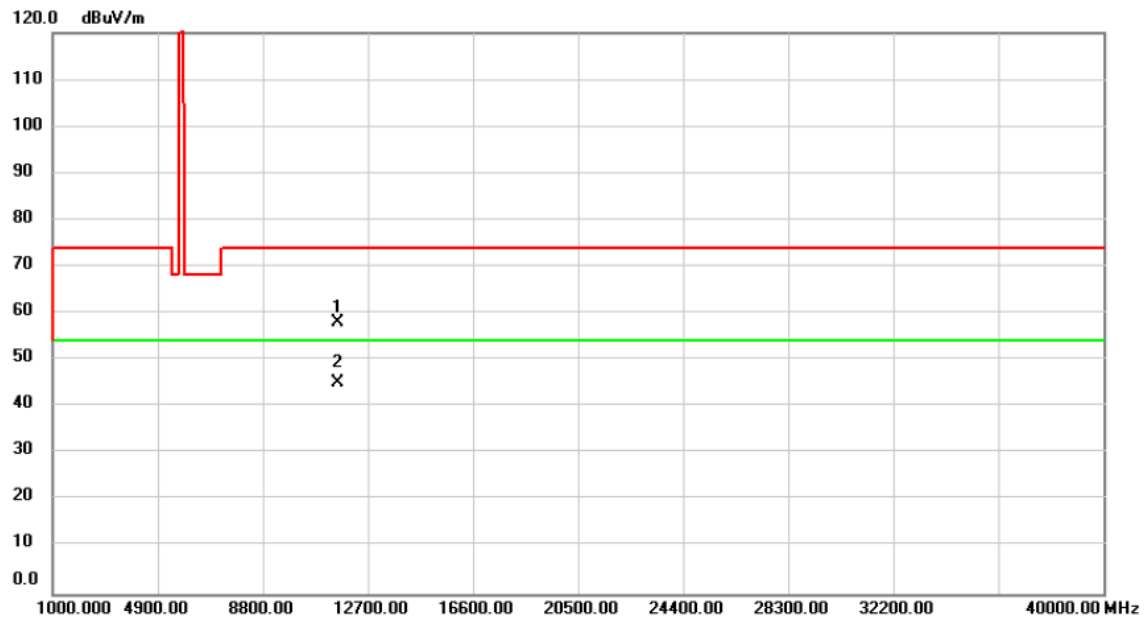

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.00	54.86	3.28	58.14	74.00	-15.86	peak	
2 *	11570.00	41.89	3.28	45.17	54.00	-8.83	AVG	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

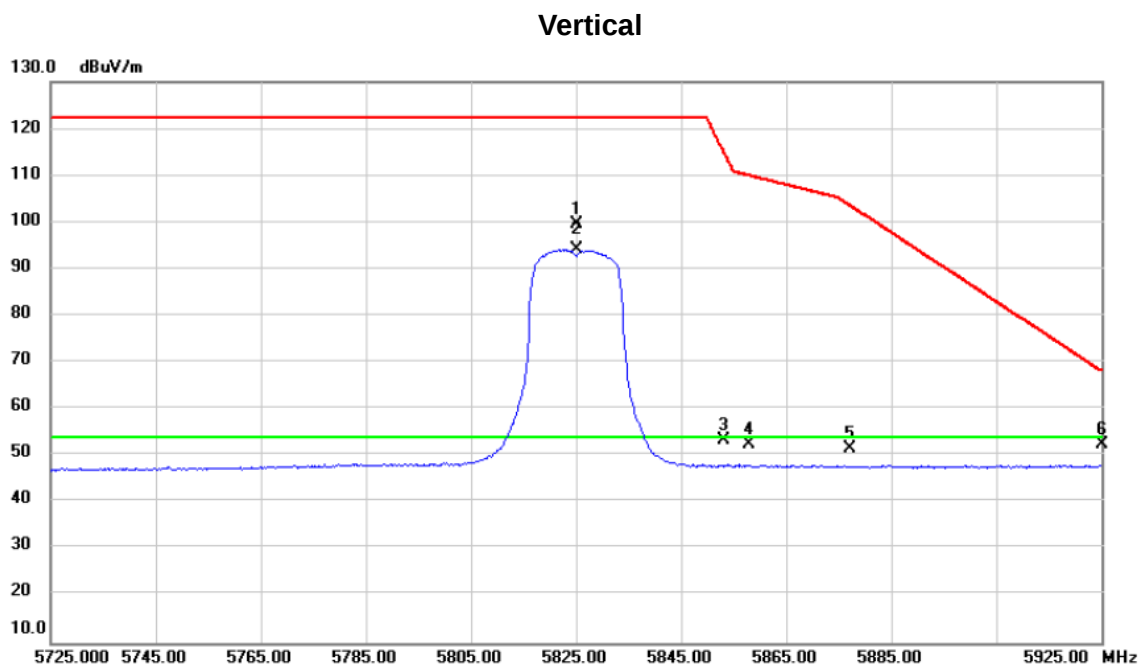

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5825.000	60.65	38.80	99.45	122.20	-22.75	peak	No Limit
2 *	5825.000	55.29	38.80	94.09	54.00	40.09	A/VG	No Limit
3	5853.235	14.42	38.89	53.31	114.82	-61.51	peak	
4	5857.940	13.47	38.89	52.36	109.98	-57.62	peak	
5	5877.150	12.64	38.94	51.58	103.61	-52.03	peak	
6	5925.000	13.28	39.08	52.36	68.20	-15.84	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Vertical

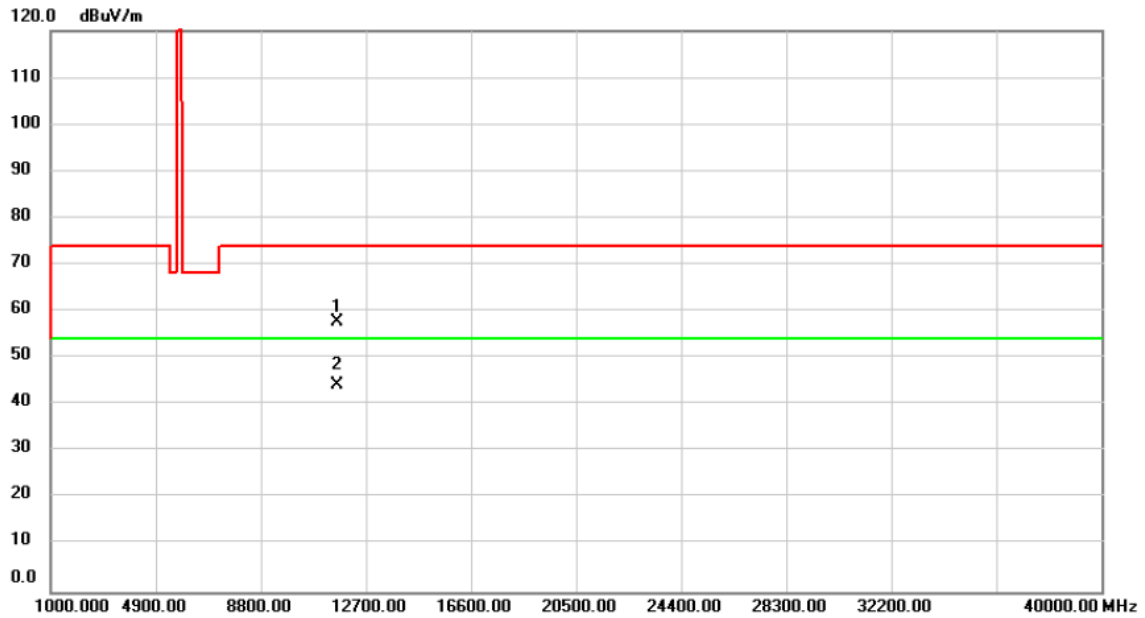

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.00	54.56	3.13	57.69	74.00	-16.31	peak	
2 *	11650.00	40.99	3.13	44.12	54.00	-9.88	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Horizontal

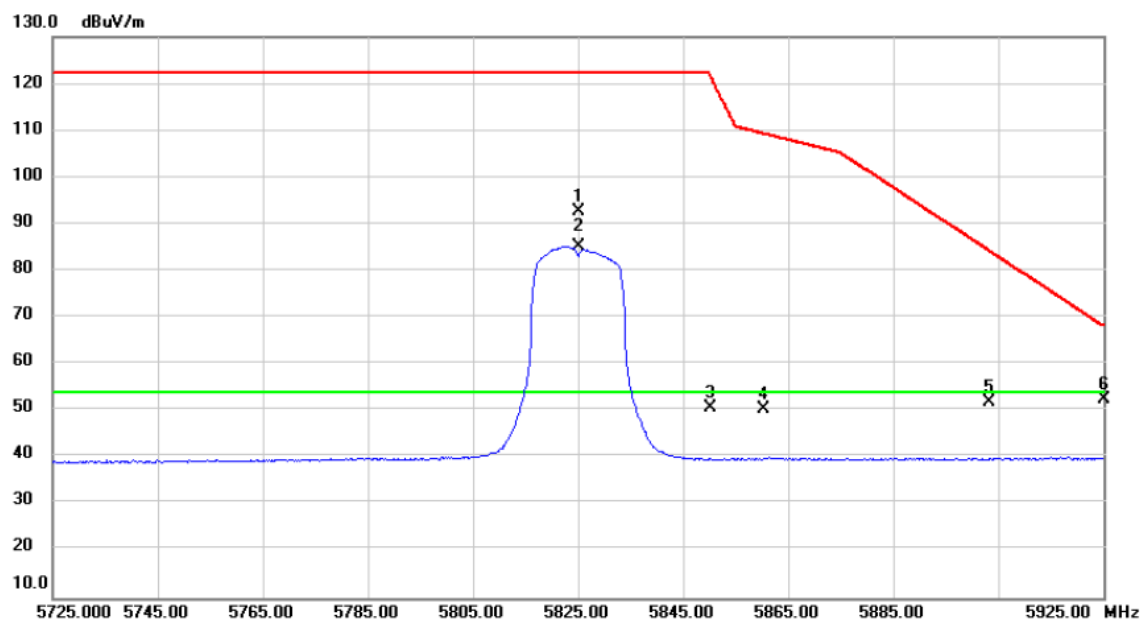

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5825.000	53.83	38.80	92.63	122.20	-29.57	peak	No Limit
2 *	5825.000	46.33	38.80	85.13	54.00	31.13	AVG	No Limit
3	5850.325	11.86	38.87	50.73	121.46	-70.73	peak	
4	5860.320	11.53	38.90	50.43	109.31	-58.88	peak	
5	5903.250	12.76	39.02	51.78	84.30	-32.52	peak	
6	5925.000	13.33	39.08	52.41	68.20	-15.79	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Horizontal

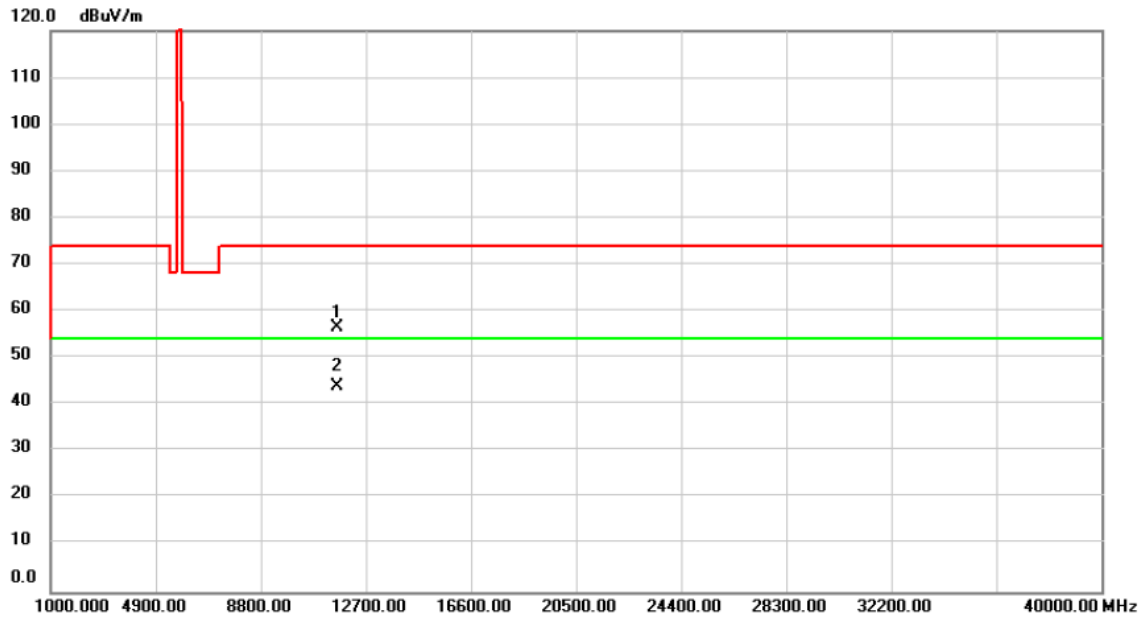

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	53.40	3.13	56.53	74.00	-17.47	peak	
2	*	11650.00	40.97	3.13	44.10	54.00	-9.90	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Vertical

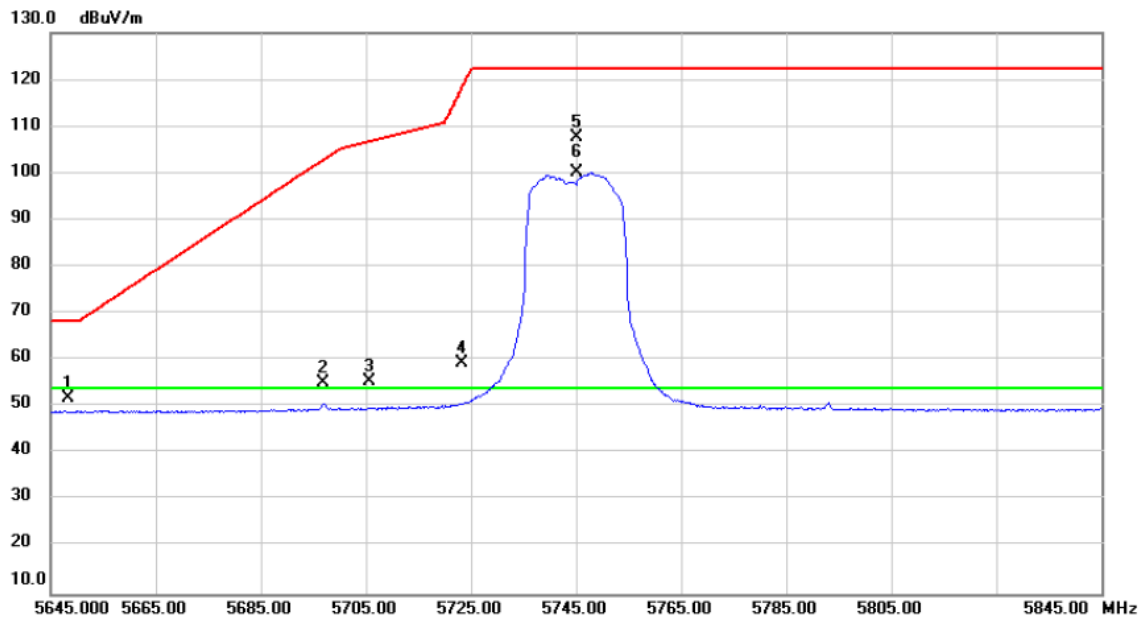

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5648.400	13.60	38.33	51.93	68.20	-16.27	peak	
2	5696.900	16.79	38.46	55.25	102.91	-47.66	peak	
3	5705.640	16.83	38.48	55.31	106.78	-51.47	peak	
4	5723.350	20.75	38.53	59.28	118.44	-59.16	peak	
5	5745.000	68.96	38.58	107.54	122.20	-14.66	peak	No Limit
6 *	5745.000	61.45	38.58	100.03	54.00	46.03	A/G	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Vertical

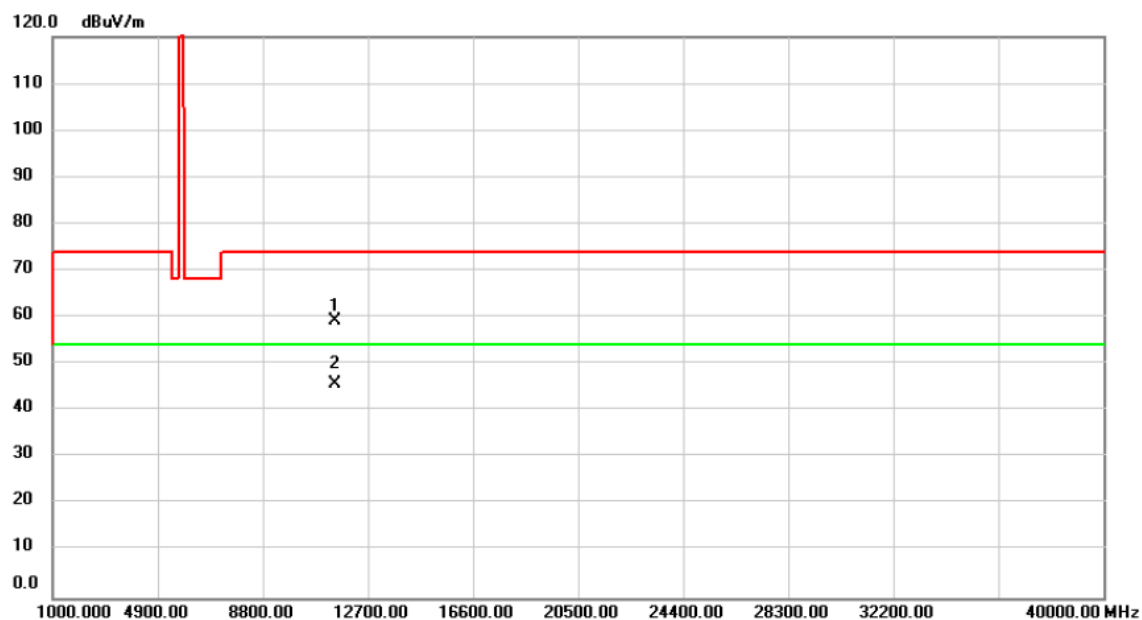

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	55.78	3.40	59.18	74.00	-14.82	peak	
2	*	11490.00	42.48	3.40	45.88	54.00	-8.12	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Horizontal

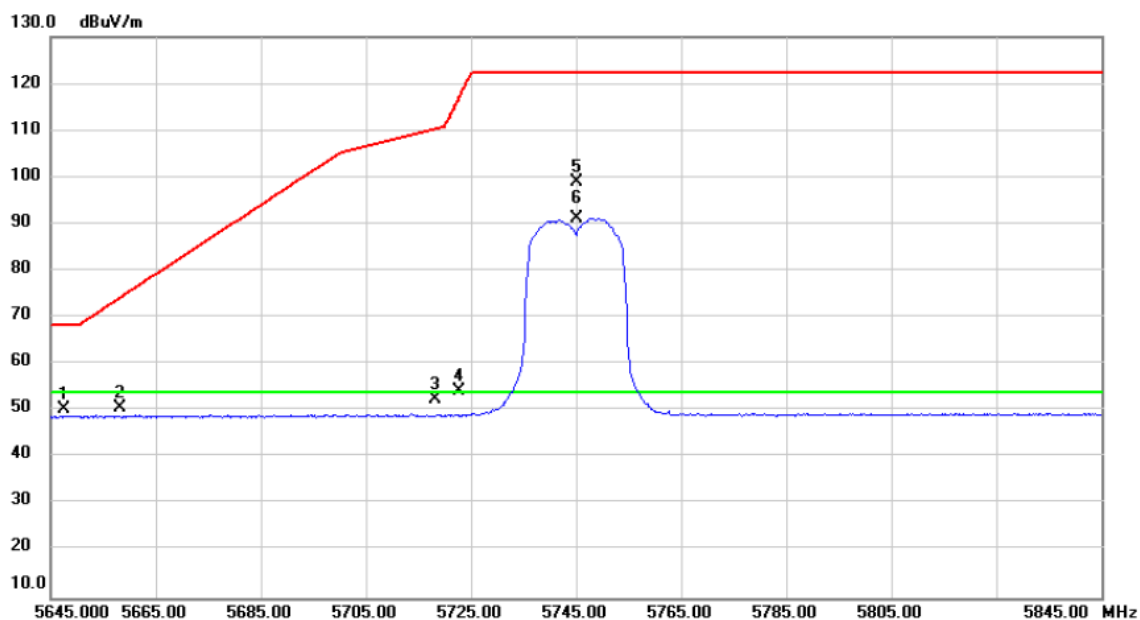

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5647.625	12.17	38.33	50.50	68.20	-17.70	peak	
2	5658.300	12.33	38.35	50.68	74.34	-23.66	peak	
3	5718.100	13.83	38.51	52.34	110.27	-57.93	peak	
4	5722.850	15.60	38.53	54.13	117.30	-63.17	peak	
5	5745.000	60.47	38.58	99.05	122.20	-23.15	peak	No Limit
6 *	5745.000	52.61	38.58	91.19	54.00	37.19	A/G	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Horizontal

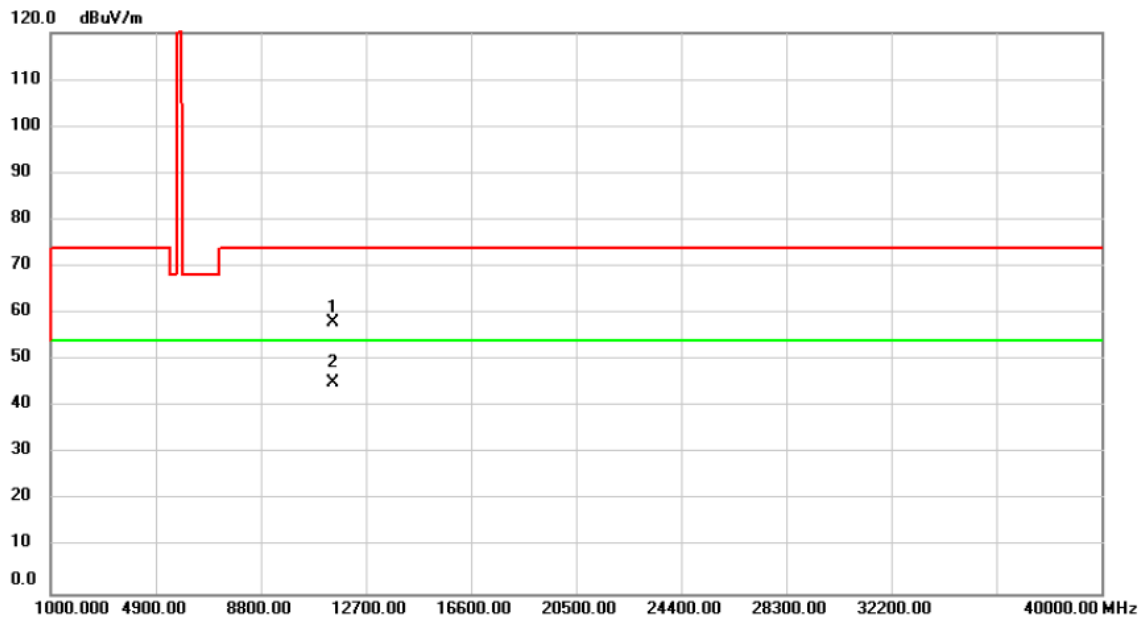

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.00	54.61	3.40	58.01	74.00	-15.99	peak	
2 *	11490.00	41.77	3.40	45.17	54.00	-8.83	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Vertical

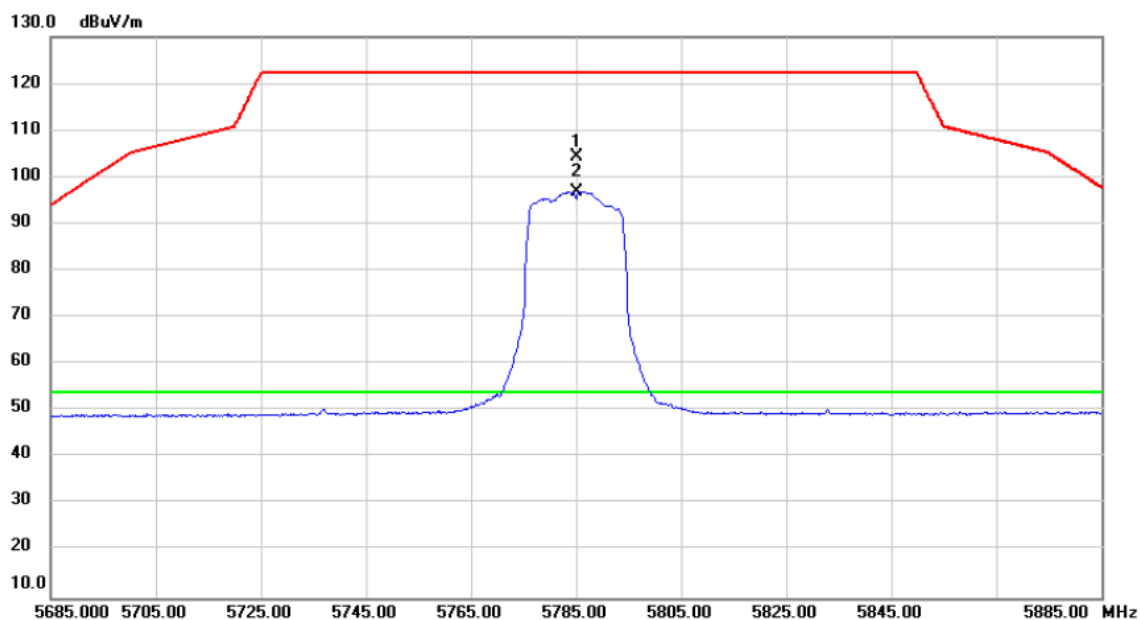

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5785.000	65.60	38.70	104.30	122.20	-17.90	peak	No Limit
2 *	5785.000	58.14	38.70	96.84	54.00	42.84	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Vertical

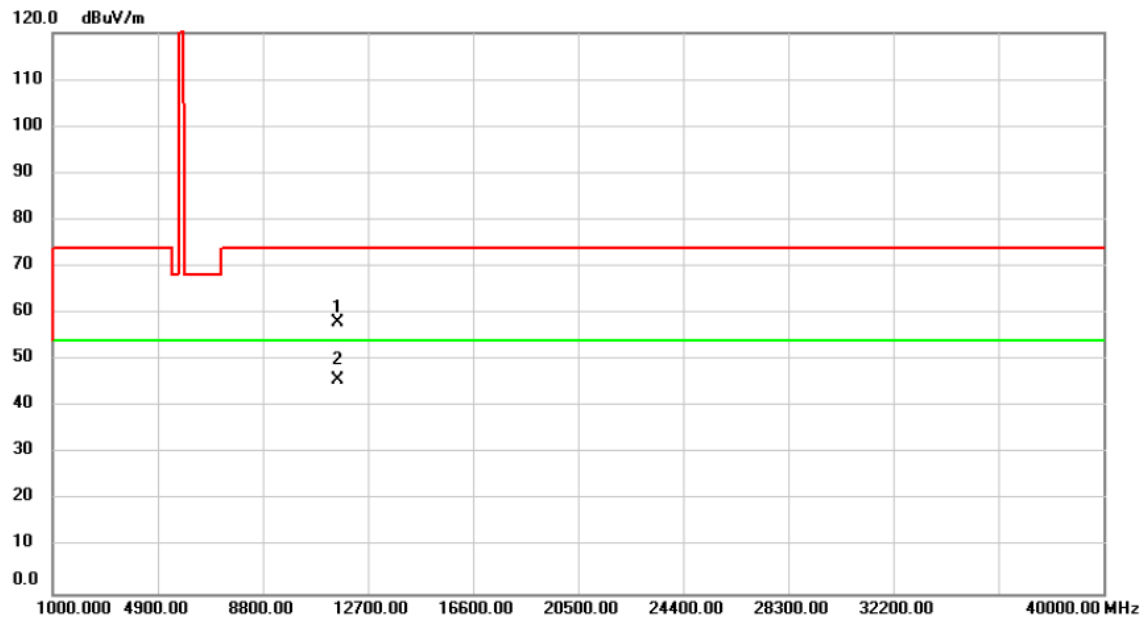

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	54.77	3.28	58.05	74.00	-15.95	peak	
2	*	11570.00	42.59	3.28	45.87	54.00	-8.13	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Horizontal

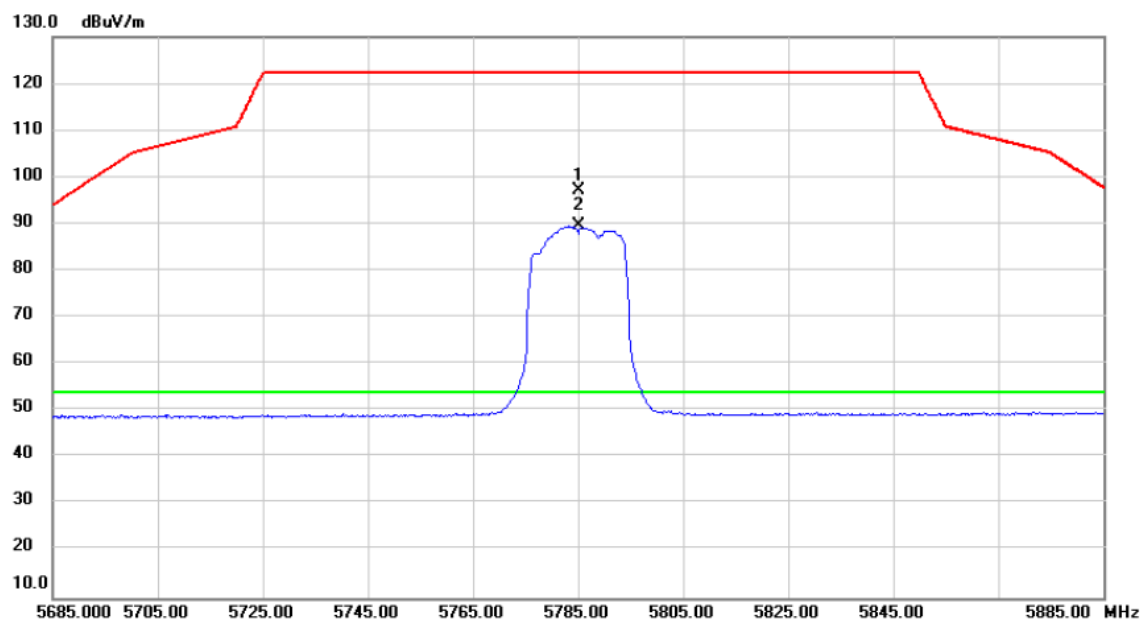

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5785.000	58.53	38.70	97.23	122.20	-24.97	peak	No Limit
2	*	5785.000	50.82	38.70	89.52	54.00	35.52	AVG	No Limit


Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz

Horizontal

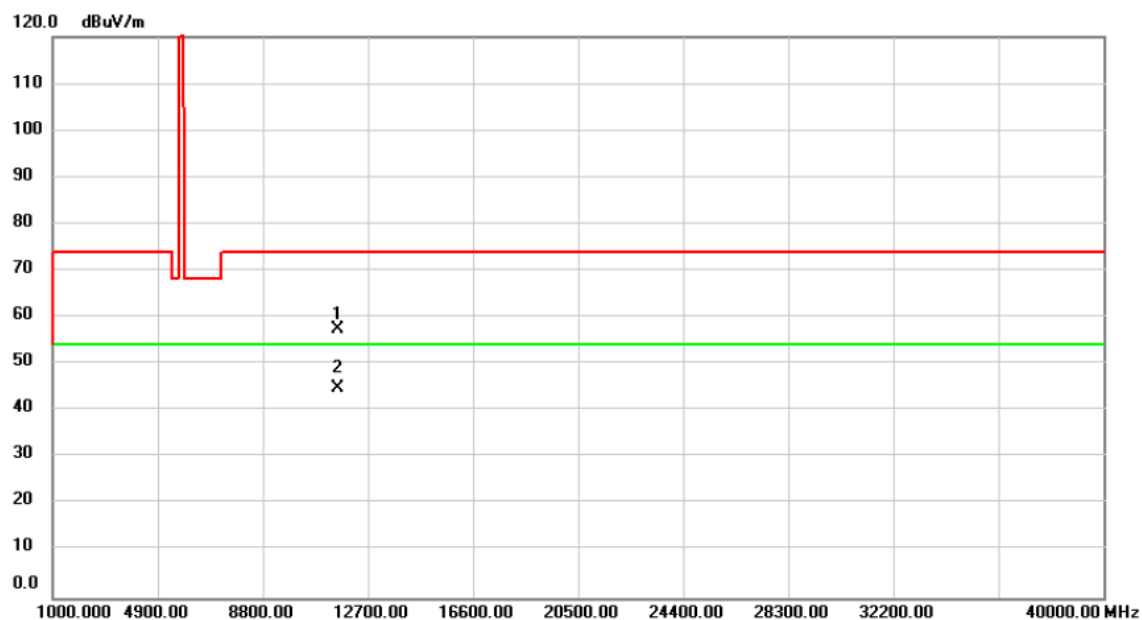

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	54.26	3.28	57.54	74.00	-16.46	peak	
2	*	11570.00	41.63	3.28	44.91	54.00	-9.09	AVG	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz

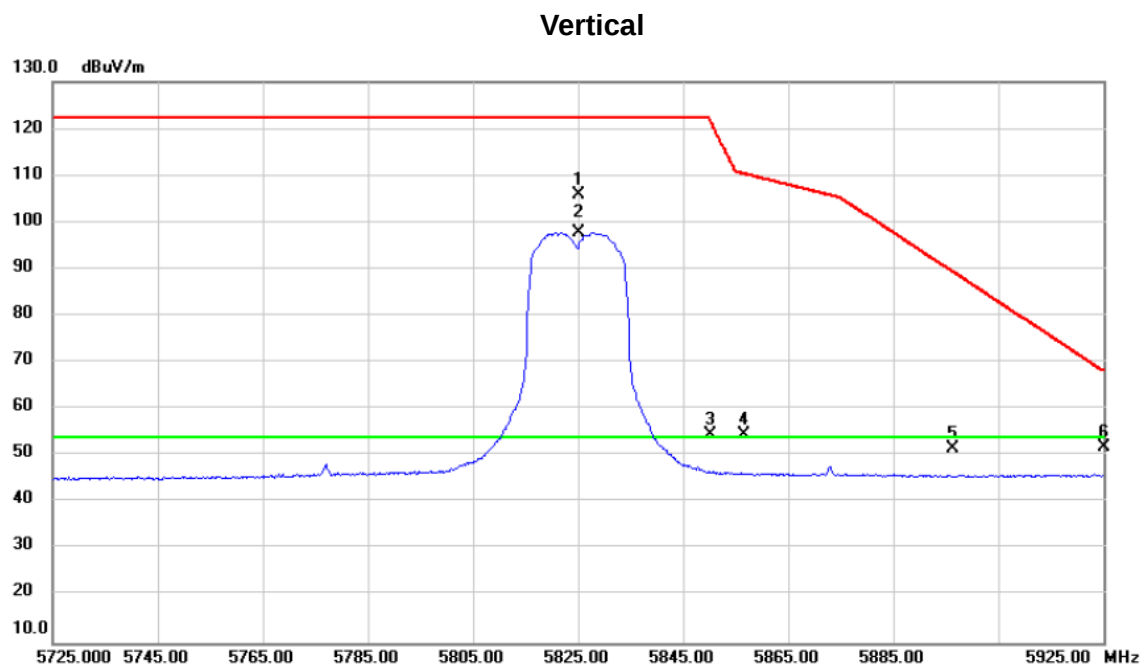

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5825.000	67.16	38.80	105.96	122.20	-16.24	peak	No Limit
2	*	5825.000	59.00	38.80	97.80	54.00	43.80	AVG	No Limit
3		5850.280	15.73	38.87	54.60	121.56	-66.96	peak	
4		5856.700	15.57	38.89	54.46	110.32	-55.86	peak	
5		5896.400	12.53	38.99	51.52	89.36	-37.84	peak	
6		5925.000	12.85	39.08	51.93	68.20	-16.27	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Vertical

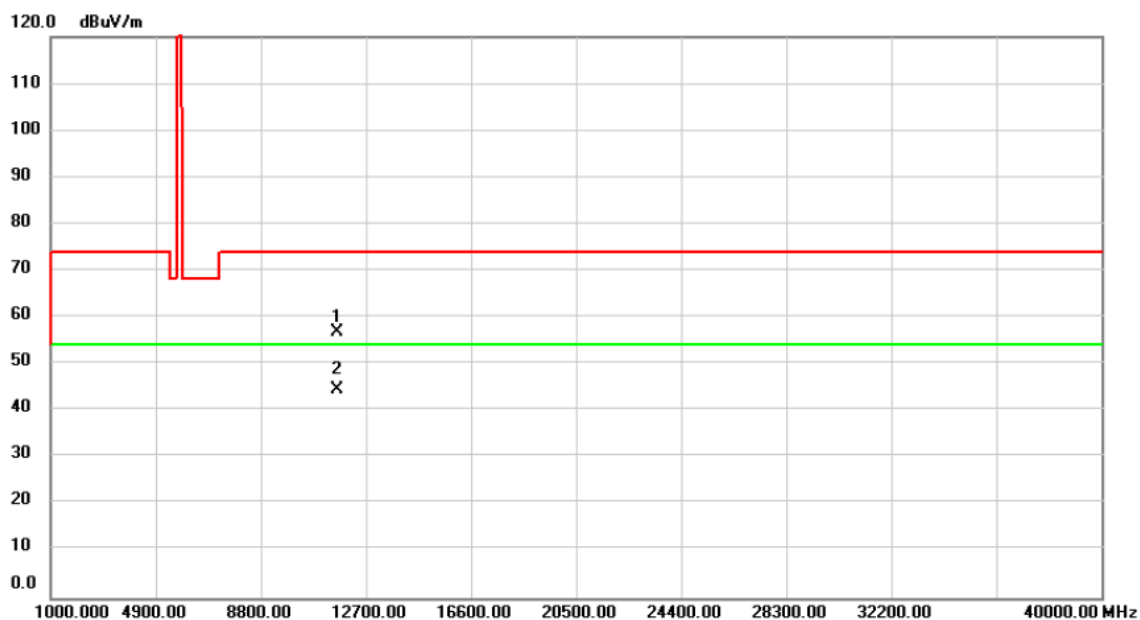

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	53.73	3.13	56.86	74.00	-17.14	peak	
2	*	11650.00	41.30	3.13	44.43	54.00	-9.57	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Horizontal

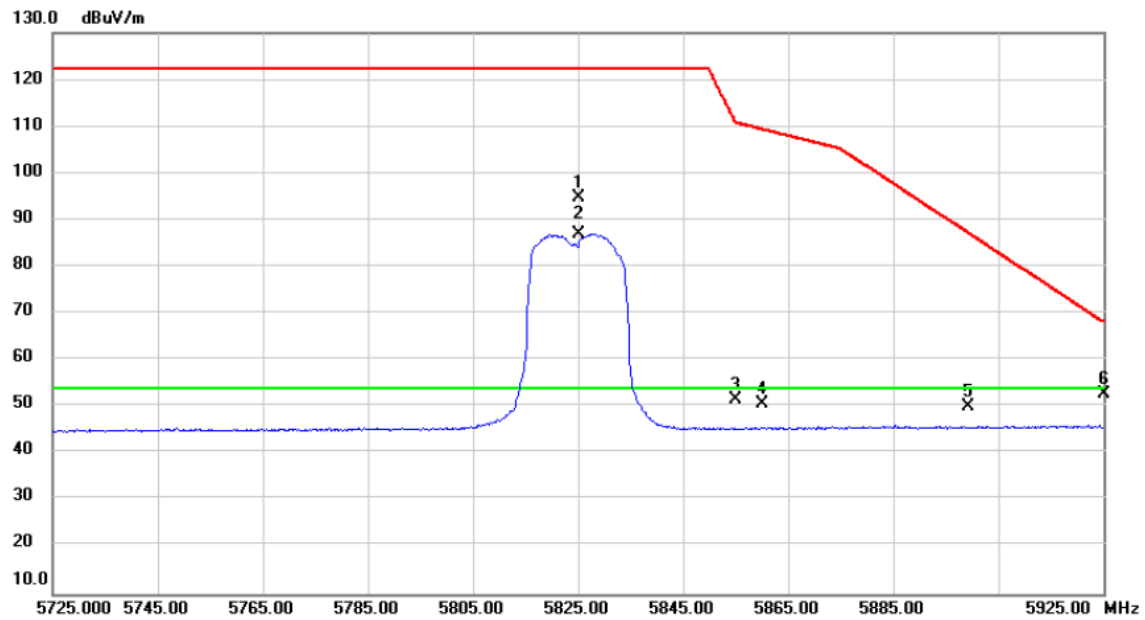

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5825.000	55.90	38.80	94.70	122.20	-27.50	peak	No Limit
2 *	5825.000	48.18	38.80	86.98	54.00	32.98	AVG	No Limit
3	5854.985	12.54	38.89	51.43	110.83	-59.40	peak	
4	5859.960	11.62	38.90	50.52	109.41	-58.89	peak	
5	5899.320	11.08	39.01	50.09	87.20	-37.11	peak	
6	5925.000	13.73	39.08	52.81	68.20	-15.39	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Horizontal

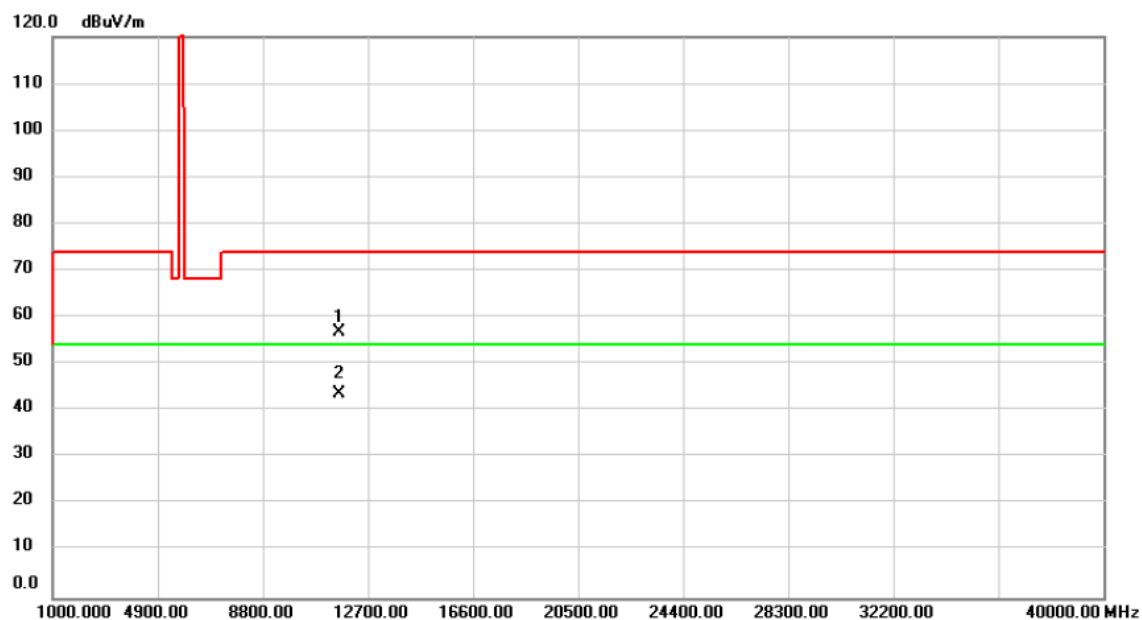

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	53.70	3.13	56.83	74.00	-17.17	peak	
2	*	11650.00	40.64	3.13	43.77	54.00	-10.23	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Vertical

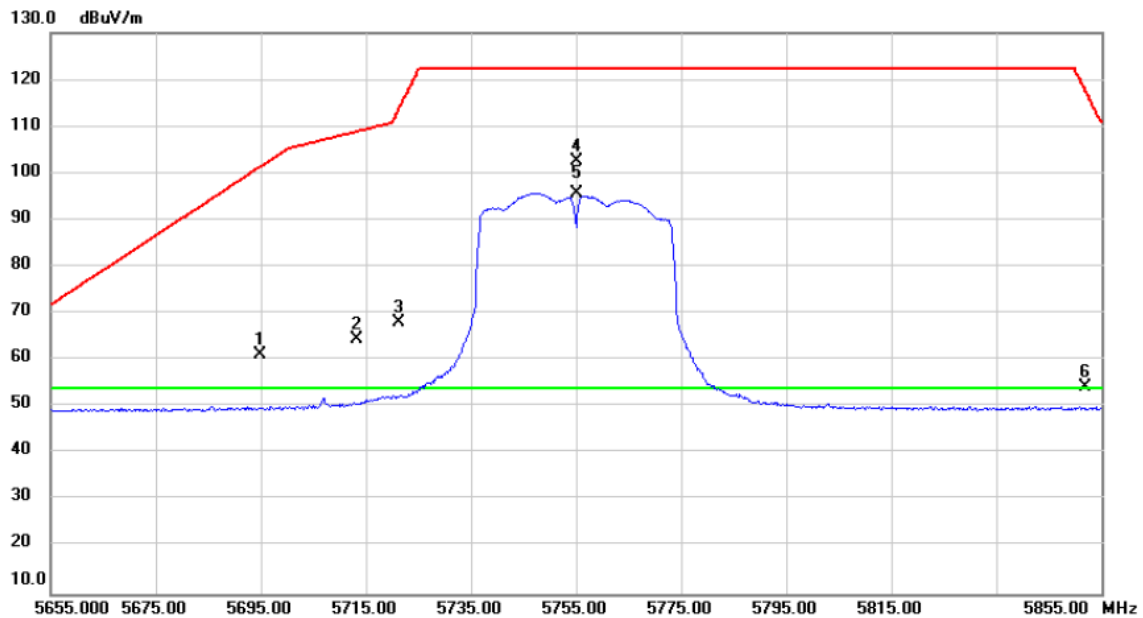

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5694.825	22.62	38.45	61.07	101.37	-40.30	peak	
2	5713.340	25.88	38.50	64.38	108.94	-44.56	peak	
3	5721.235	29.56	38.52	68.08	113.62	-45.54	peak	
4	5755.000	63.91	38.62	102.53	122.20	-19.67	peak	No Limit
5 *	5755.000	57.13	38.62	95.75	54.00	41.75	AVG	No Limit
6	5851.965	15.48	38.87	54.35	117.72	-63.37	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Vertical

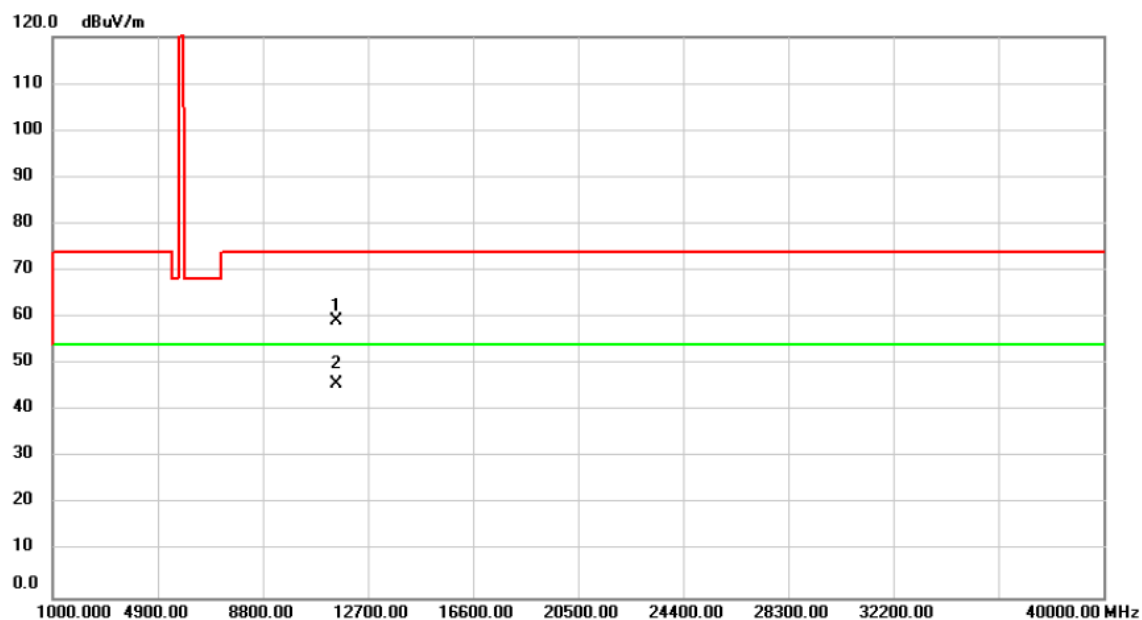

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11510.00	55.76	3.40	59.16	74.00	-14.84	peak	
2	*	11510.00	42.38	3.40	45.78	54.00	-8.22	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Horizontal

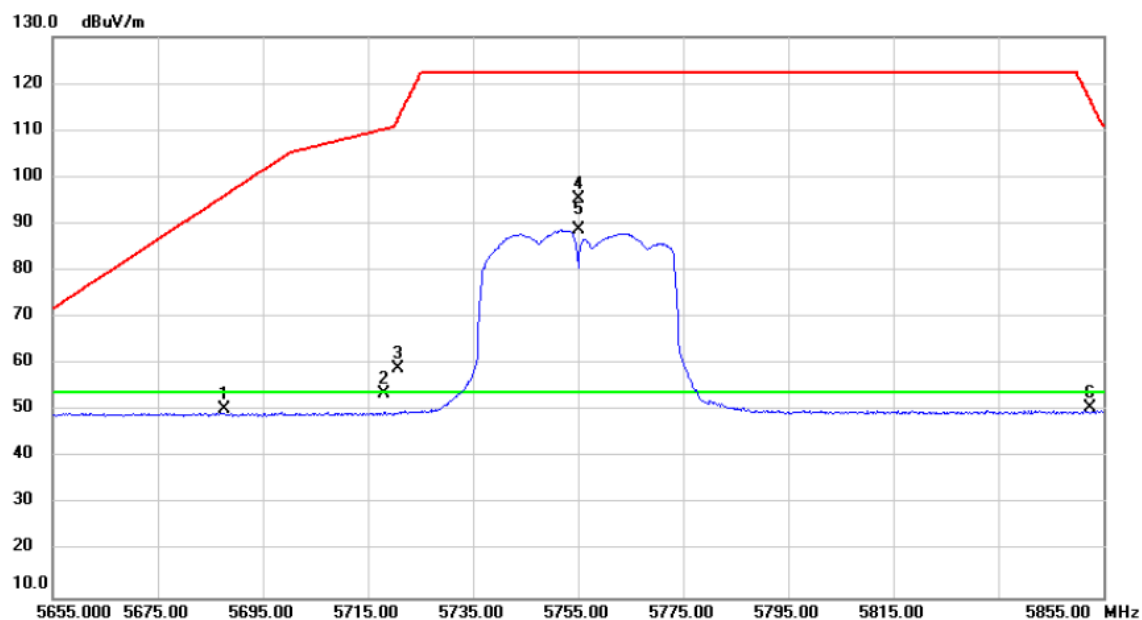

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5687.625	11.87	38.43	50.30	96.04	-45.74	peak	
2	5718.080	15.17	38.51	53.68	110.26	-56.58	peak	
3	5720.605	20.47	38.52	58.99	112.18	-53.19	peak	
4	5755.000	56.83	38.62	95.45	122.20	-26.75	peak	No Limit
5 *	5755.000	50.06	38.62	88.68	54.00	34.68	AVG	No Limit
6	5852.530	11.68	38.87	50.55	116.43	-65.88	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz


Horizontal

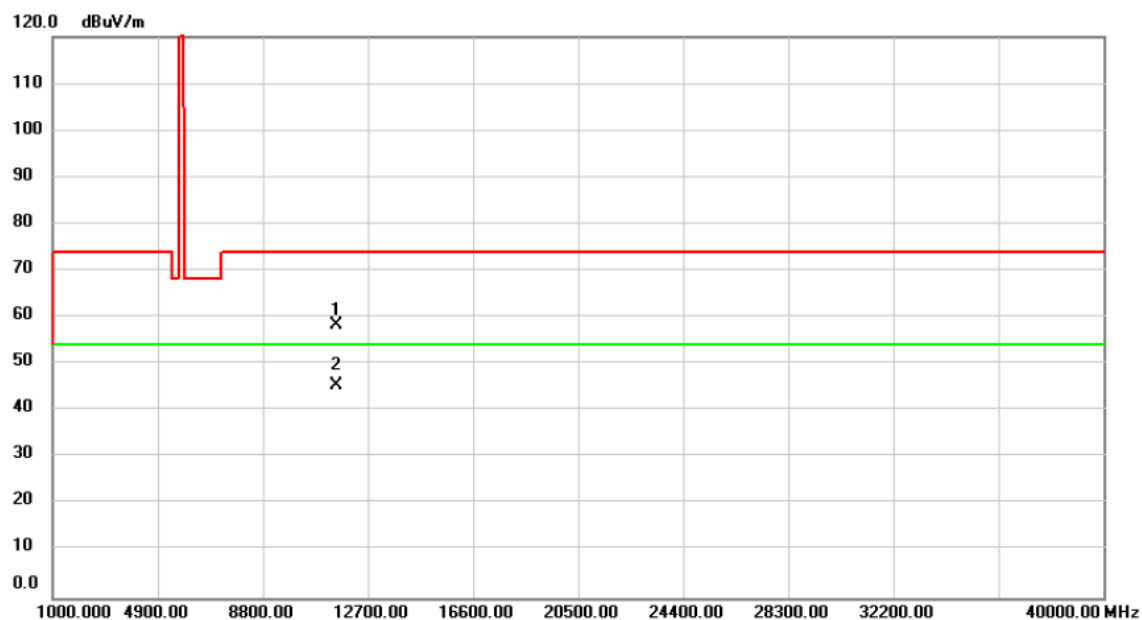

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.00	54.89	3.40	58.29	74.00	-15.71	peak	
2	*	11510.00	41.98	3.40	45.38	54.00	-8.62	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Vertical

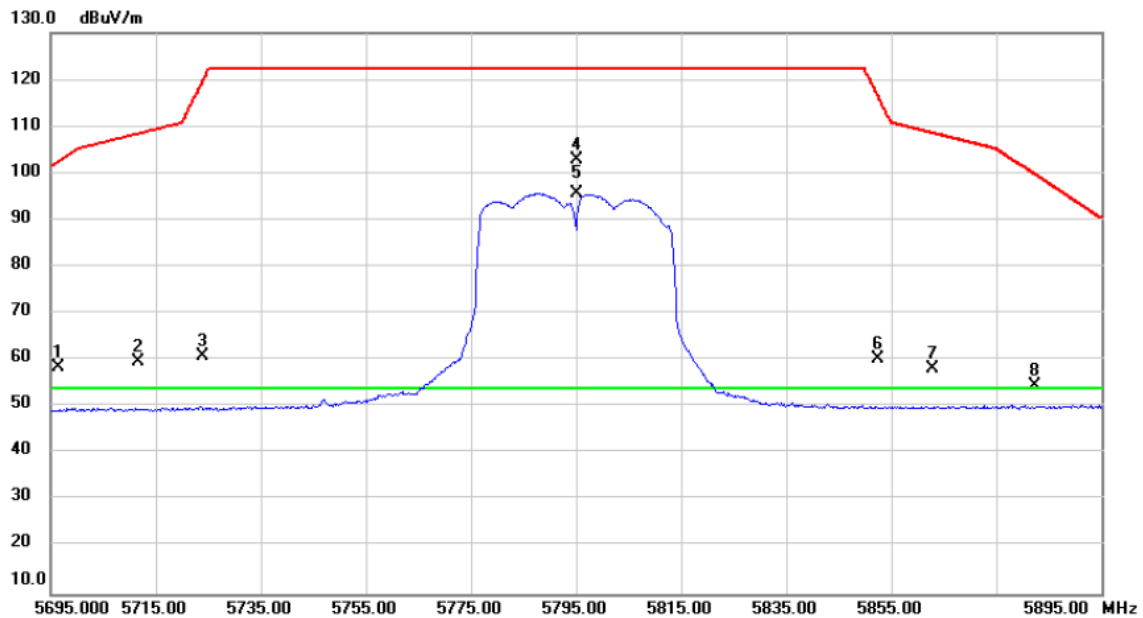

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5696.340	20.08	38.45	58.53	102.49	-43.96	peak	
2		5711.640	21.09	38.50	59.59	108.46	-48.87	peak	
3		5724.035	22.42	38.53	60.95	120.00	-59.05	peak	
4		5795.000	64.19	38.72	102.91	122.20	-19.29	peak	No Limit
5	*	5795.000	56.95	38.72	95.67	54.00	41.67	AVG	No Limit
6		5852.535	21.38	38.87	60.25	116.42	-56.17	peak	
7		5862.760	19.11	38.91	58.02	108.63	-50.61	peak	
8		5882.460	15.45	38.96	54.41	99.68	-45.27	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Vertical

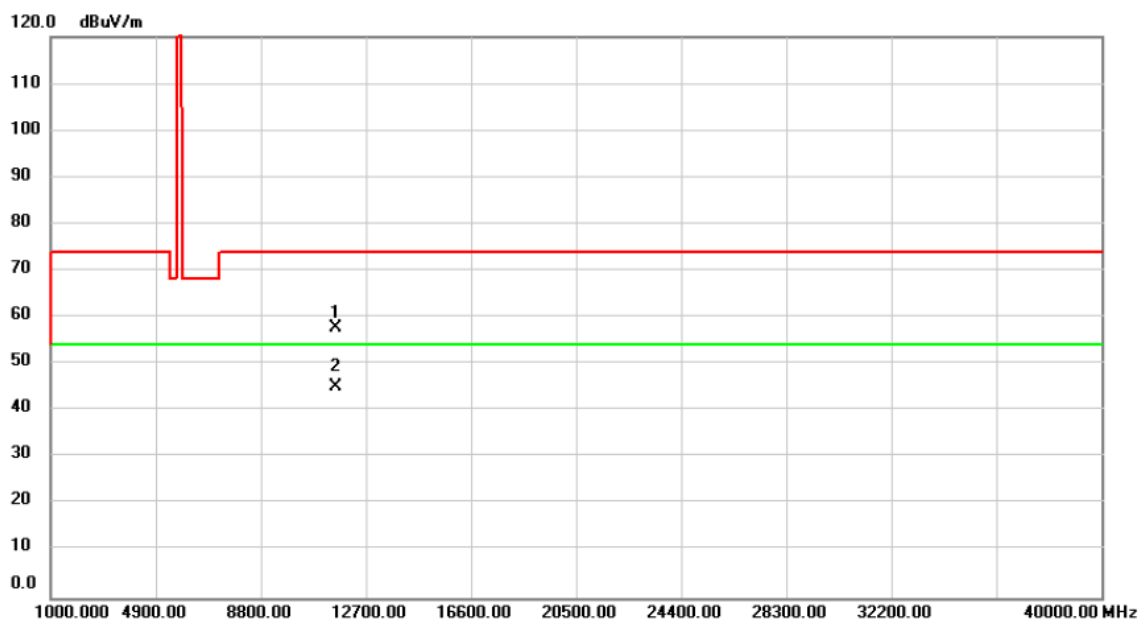

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	54.42	3.25	57.67	74.00	-16.33	peak	
2	*	11590.00	41.86	3.25	45.11	54.00	-8.89	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Horizontal

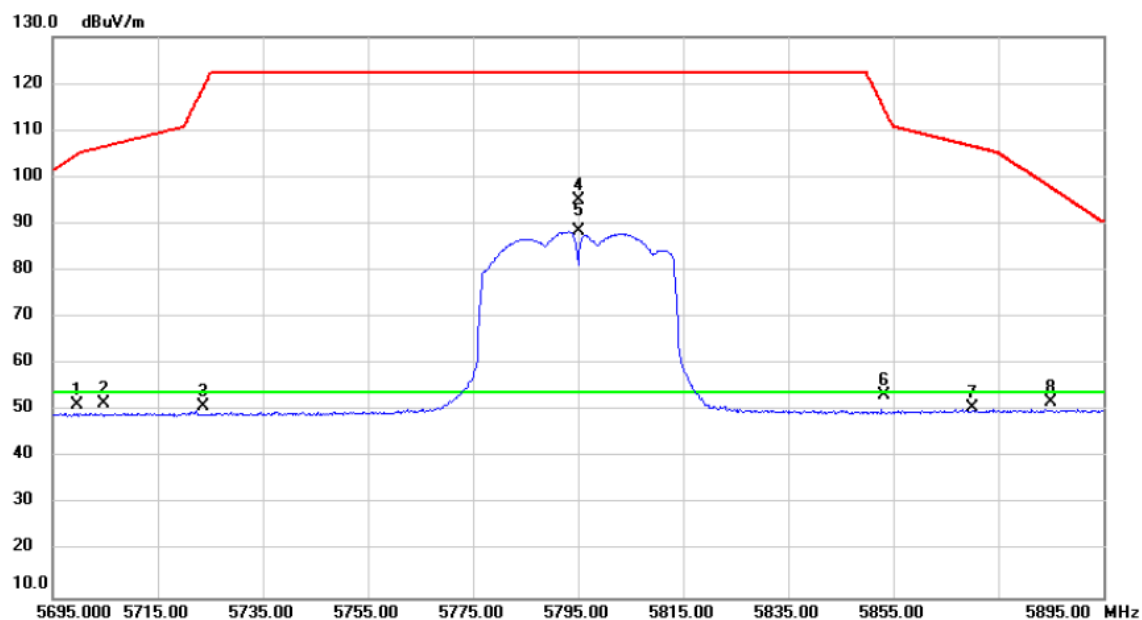

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5699.790	12.69	38.46	51.15	105.04	-53.89	peak	
2	5704.600	13.06	38.48	51.54	106.49	-54.95	peak	
3	5723.580	12.34	38.53	50.87	118.96	-68.09	peak	
4	5795.000	56.28	38.72	95.00	122.20	-27.20	peak	No Limit
5 *	5795.000	49.73	38.72	88.45	54.00	34.45	A/VG	No Limit
6	5853.135	14.37	38.89	53.26	115.05	-61.79	peak	
7	5870.080	11.61	38.92	50.53	106.58	-56.05	peak	
8	5884.920	12.95	38.97	51.92	97.86	-45.94	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Horizontal

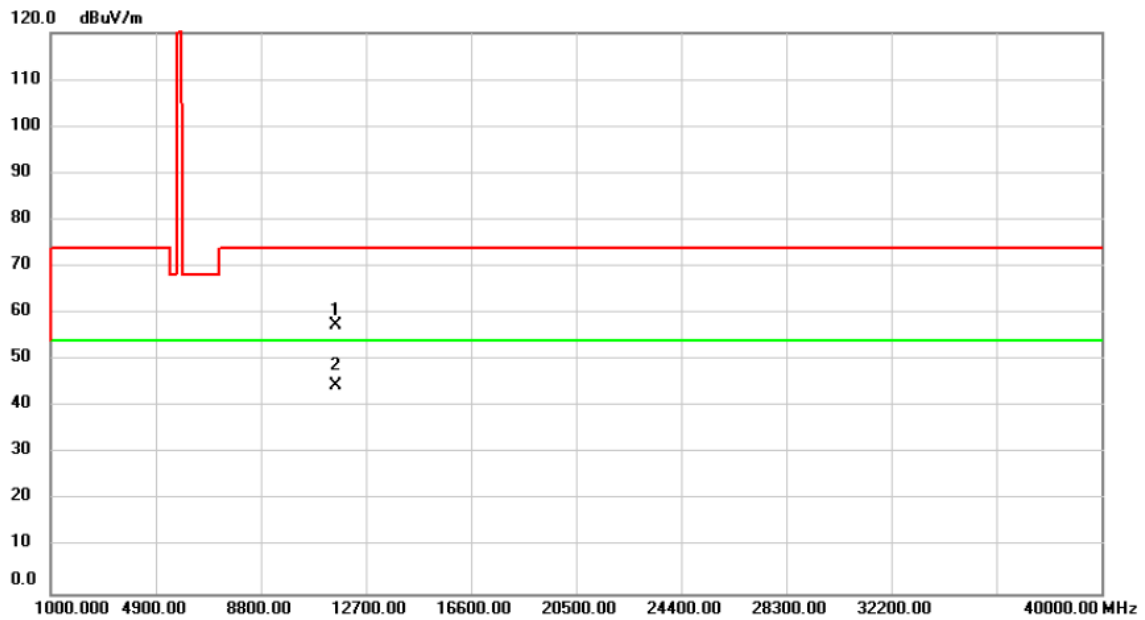

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	54.28	3.25	57.53	74.00	-16.47	peak	
2	*	11590.00	41.35	3.25	44.60	54.00	-9.40	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Vertical

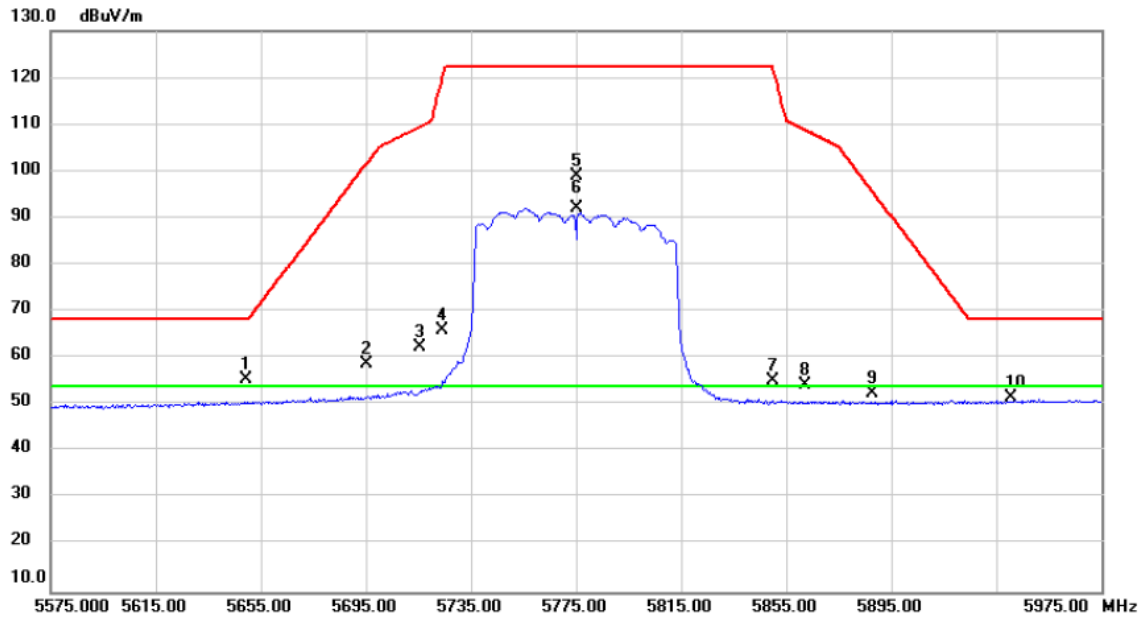

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5649.250	17.09	38.33	55.42	68.20	-12.78	peak	
2	5695.500	20.28	38.45	58.73	101.87	-43.14	peak	
3	5715.700	23.90	38.51	62.41	109.60	-47.19	peak	
4	5724.100	27.33	38.53	65.86	120.15	-54.29	peak	
5	5775.000	60.38	38.67	99.05	122.20	-23.15	peak	No Limit
6 *	5775.000	53.41	38.67	92.08	54.00	38.08	A/G	No Limit
7	5850.060	16.29	38.87	55.16	122.06	-66.90	peak	
8	5862.060	15.42	38.91	54.33	108.82	-54.49	peak	
9	5888.050	13.44	38.97	52.41	95.54	-43.13	peak	
10	5940.850	12.53	39.12	51.65	68.20	-16.55	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Vertical

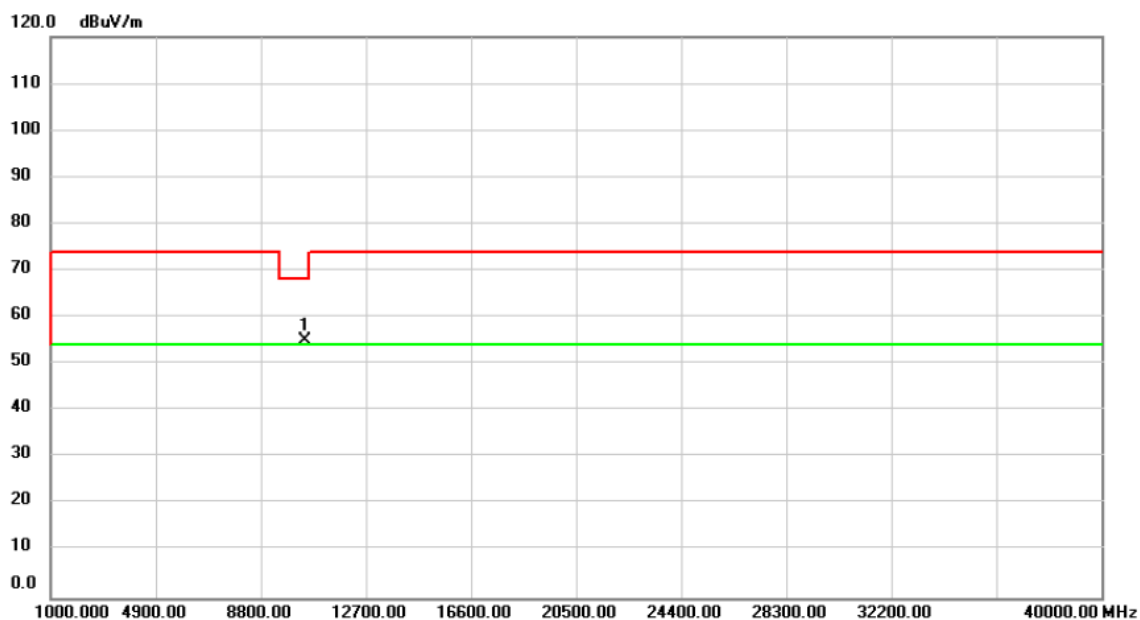

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	52.98	1.95	54.93	68.20	-13.27	peak	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Horizontal

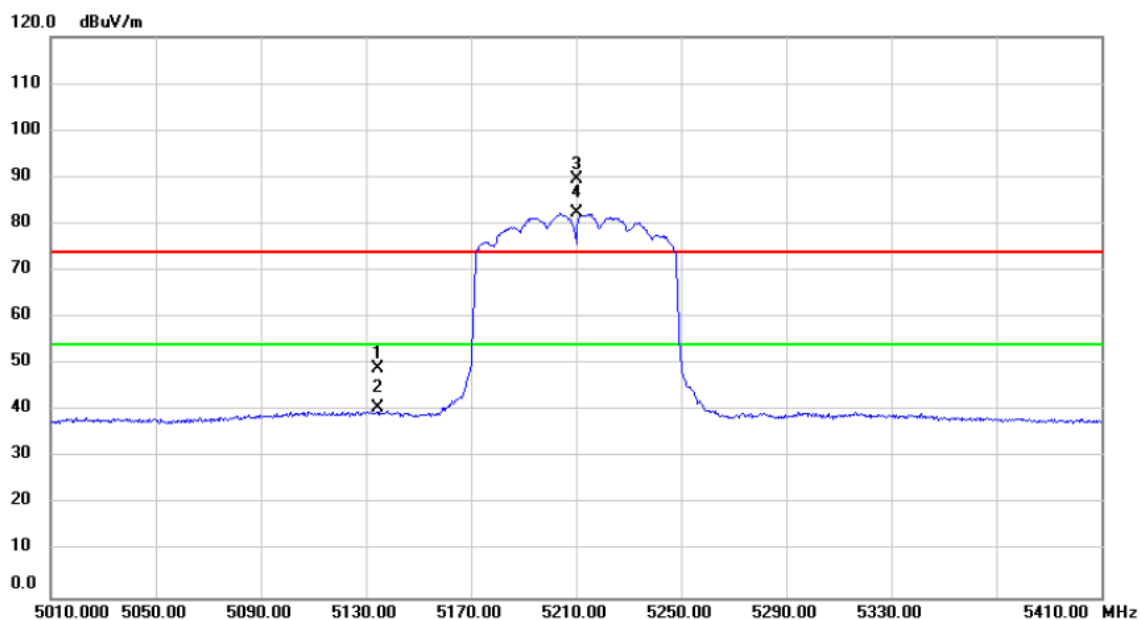

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5134.320	11.53	37.52	49.05	74.00	-24.95	peak	
2		5134.320	3.01	37.52	40.53	54.00	-13.47	AVG	
3	X	5210.000	52.02	37.61	89.63	74.00	15.63	peak	No Limit
4	*	5210.000	44.65	37.61	82.26	54.00	28.26	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Horizontal

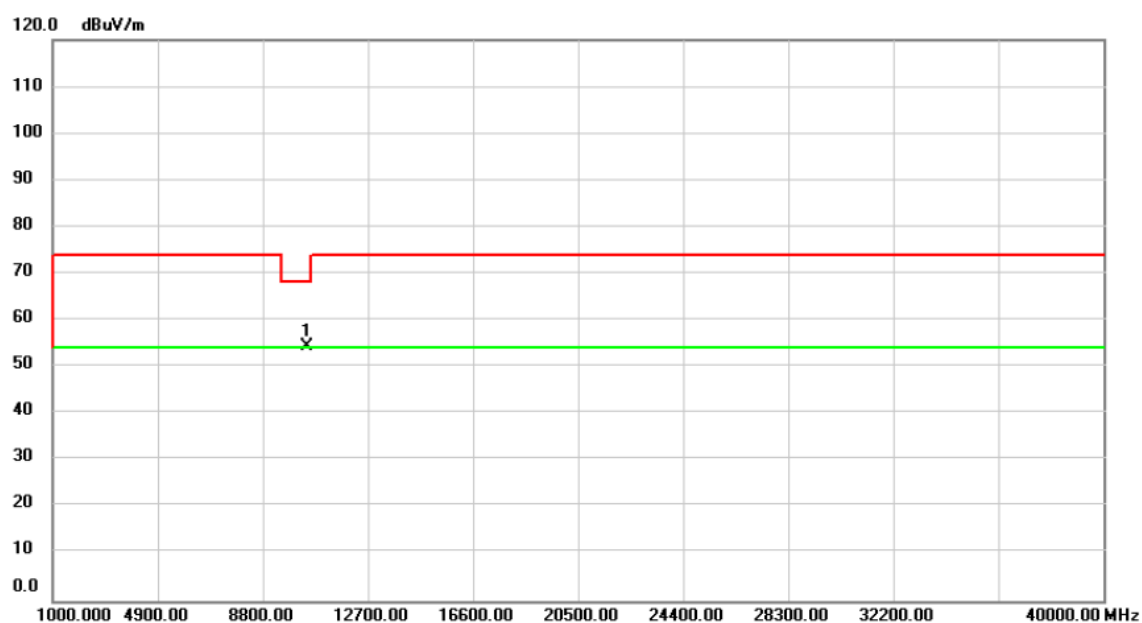

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	52.55	1.95	54.50	68.20	-13.70	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


Vertical

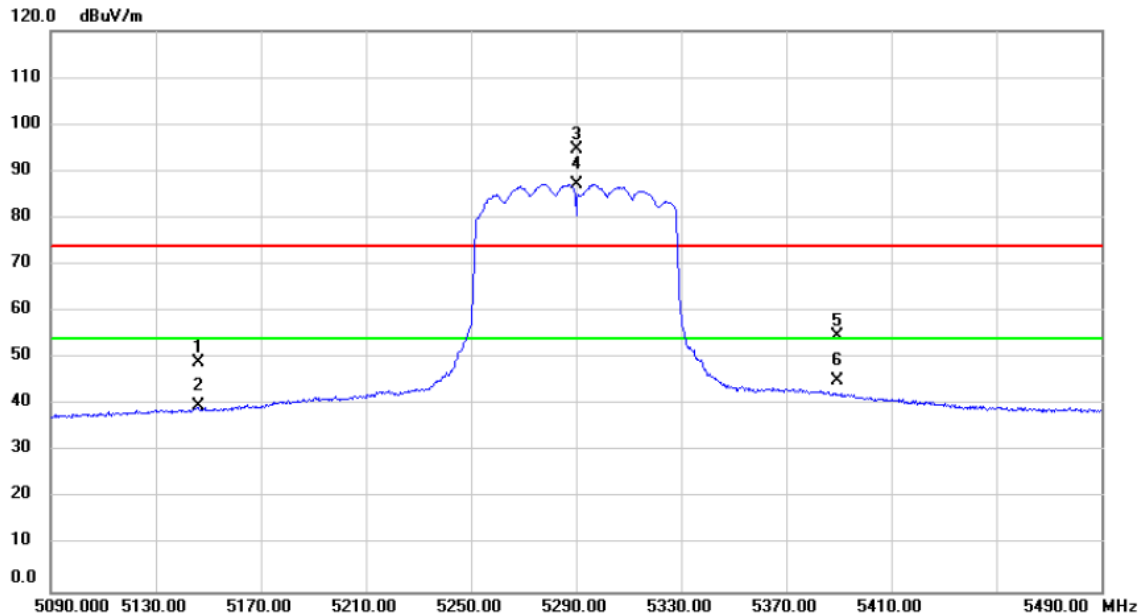

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5146.040	11.42	37.54	48.96	74.00	-25.04	peak	
2		5146.040	2.20	37.54	39.74	54.00	-14.26	AVG	
3	X	5290.000	57.11	37.69	94.80	74.00	20.80	peak	No Limit
4	*	5290.000	49.51	37.69	87.20	54.00	33.20	AVG	No Limit
5		5389.380	17.06	37.80	54.86	74.00	-19.14	peak	
6		5389.380	7.48	37.80	45.28	54.00	-8.72	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


Vertical

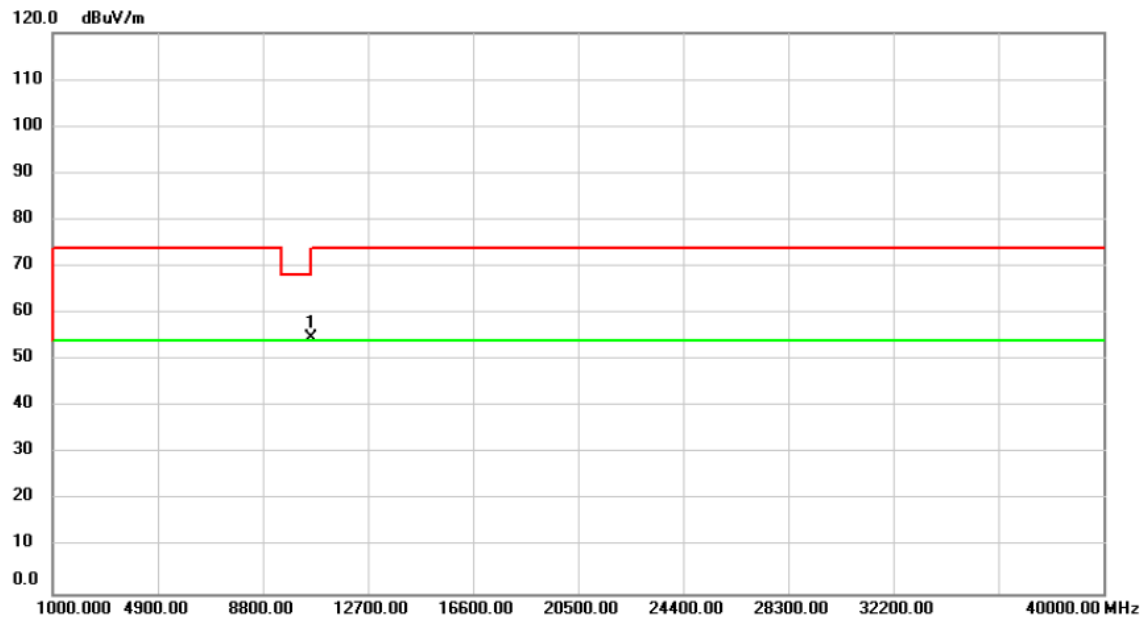

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	52.59	2.11	54.70	68.20	-13.50	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


Horizontal

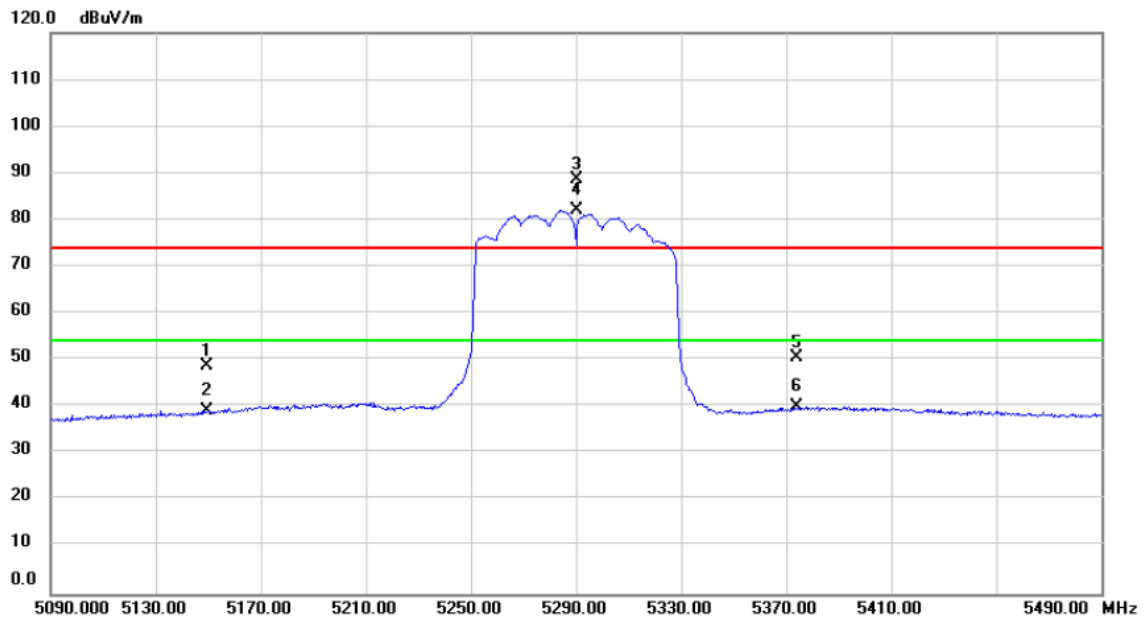

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5149.400	11.21	37.54	48.75	74.00	-25.25	peak	
2	5149.400	1.66	37.54	39.20	54.00	-14.80	AVG	
3 X	5290.000	51.02	37.69	88.71	74.00	14.71	peak	No Limit
4 *	5290.000	44.30	37.69	81.99	54.00	27.99	AVG	No Limit
5	5373.980	12.80	37.78	50.58	74.00	-23.42	peak	
6	5373.980	2.34	37.78	40.12	54.00	-13.88	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


Horizontal

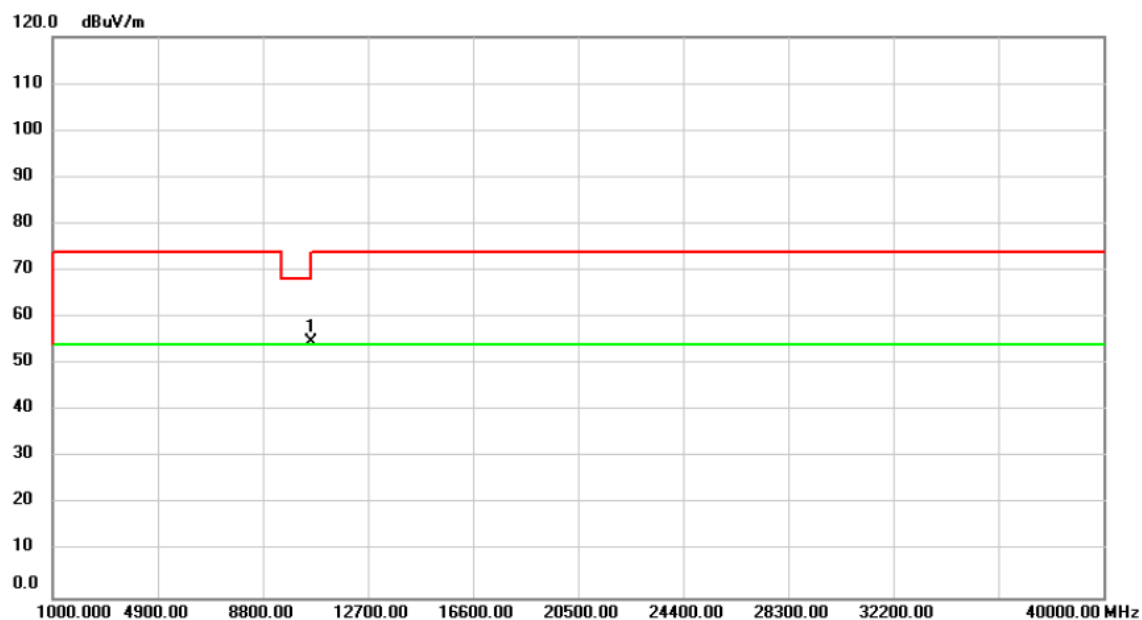

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	52.73	2.11	54.84	68.20	-13.36	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz


Vertical

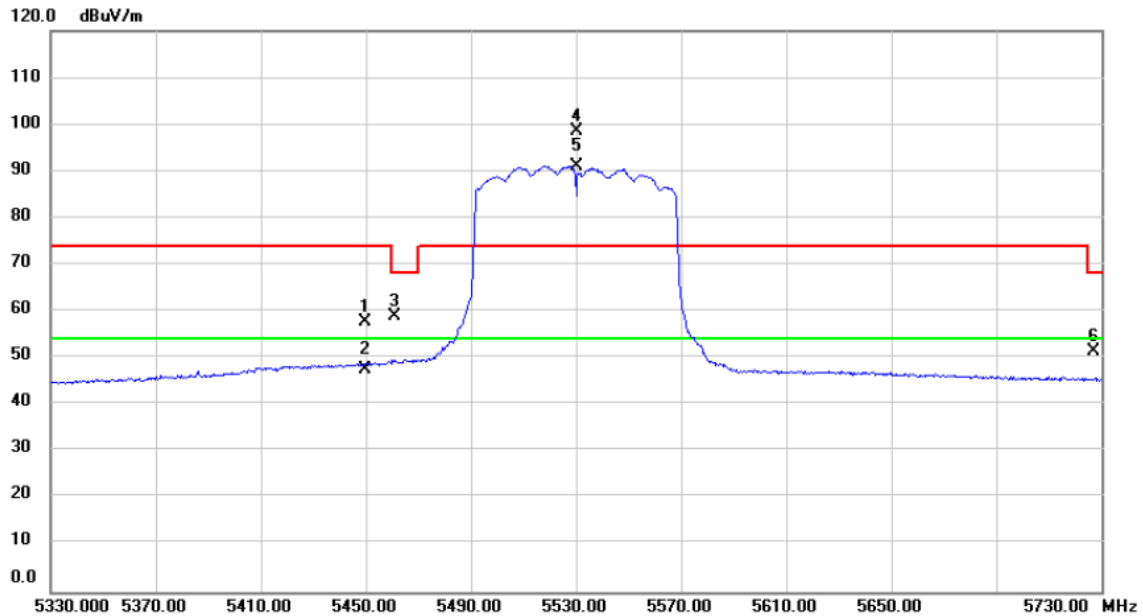

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5449.760	19.87	37.87	57.74	74.00	-16.26	peak	
2		5449.760	9.63	37.87	47.50	54.00	-6.50	AVG	
3		5461.030	21.02	37.88	58.90	68.20	-9.30	peak	
4	X	5530.000	60.64	38.00	98.64	74.00	24.64	peak	No Limit
5	*	5530.000	53.14	38.00	91.14	54.00	37.14	AVG	No Limit
6		5726.985	12.93	38.53	51.46	68.20	-16.74	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz


Vertical

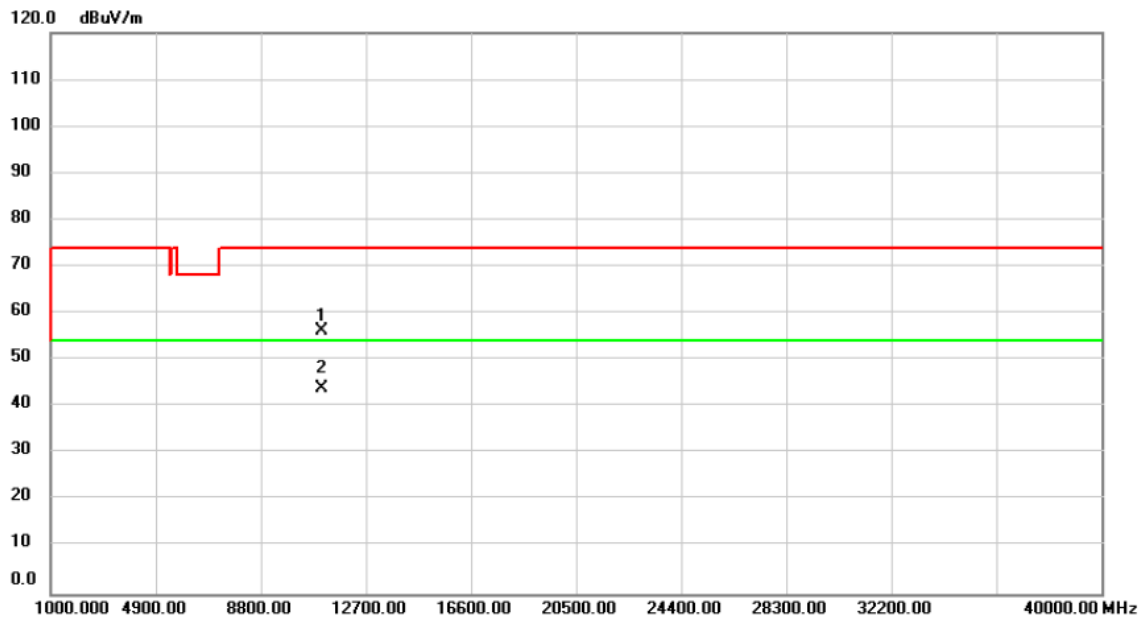

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11060.00	53.29	2.92	56.21	74.00	-17.79	peak	
2	*	11060.00	41.14	2.92	44.06	54.00	-9.94	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz


Horizontal

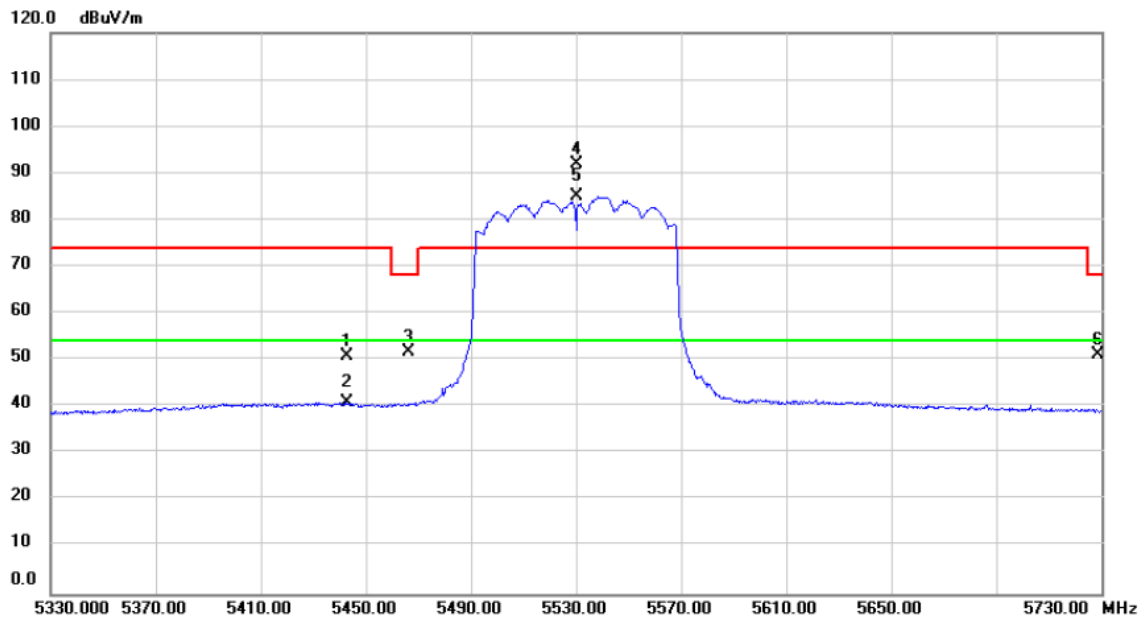

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5442.580	12.94	37.86	50.80	74.00	-23.20	peak	
2		5442.580	3.07	37.86	40.93	54.00	-13.07	AVG	
3		5466.100	13.75	37.88	51.63	68.20	-16.57	peak	
4	X	5530.000	53.86	38.00	91.86	74.00	17.86	peak	No Limit
5	*	5530.000	46.93	38.00	84.93	54.00	30.93	AVG	No Limit
6		5728.555	12.53	38.55	51.08	68.20	-17.12	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz


Horizontal

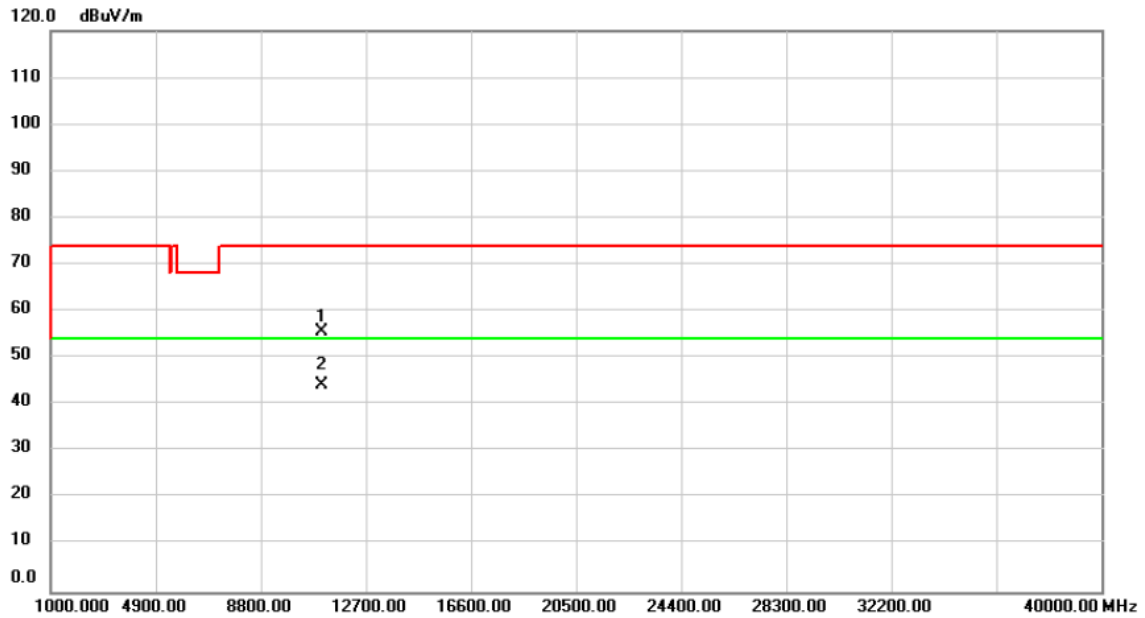

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11060.00	52.69	2.92	55.61	74.00	-18.39	peak	
2	*	11060.00	41.24	2.92	44.16	54.00	-9.84	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz


Vertical

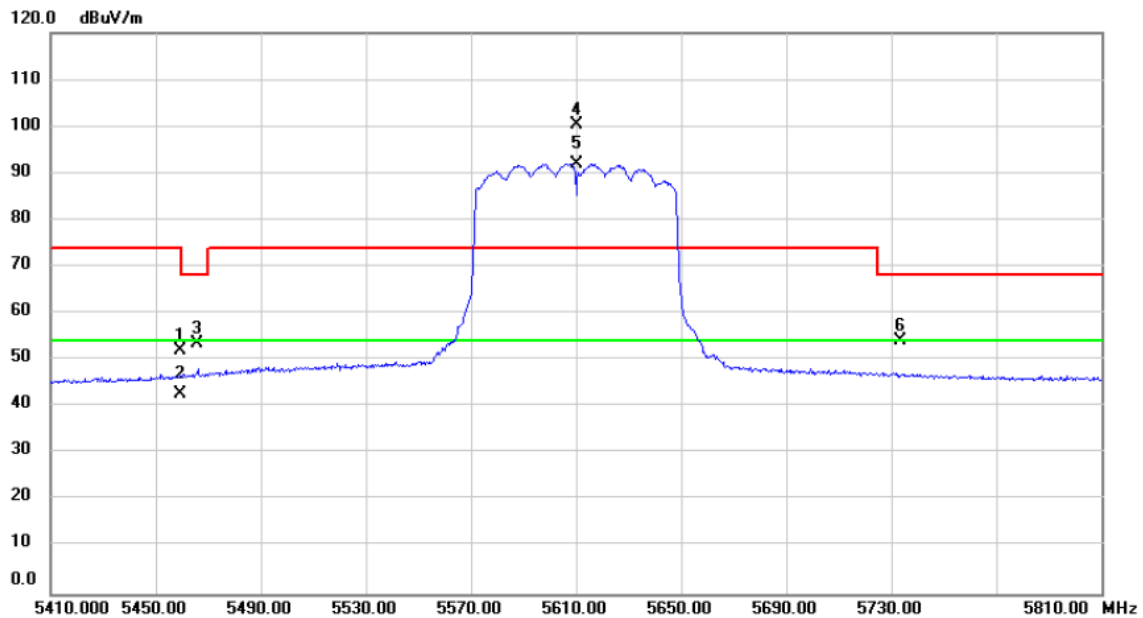

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5459.200	14.10	37.88	51.98	74.00	-22.02	peak	
2		5459.200	5.00	37.88	42.88	54.00	-11.12	AVG	
3		5465.910	15.71	37.88	53.59	68.20	-14.61	peak	
4	X	5610.000	62.21	38.22	100.43	74.00	26.43	peak	No Limit
5	*	5610.000	53.86	38.22	92.08	54.00	38.08	AVG	No Limit
6		5733.670	15.52	38.55	54.07	68.20	-14.13	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz


Vertical

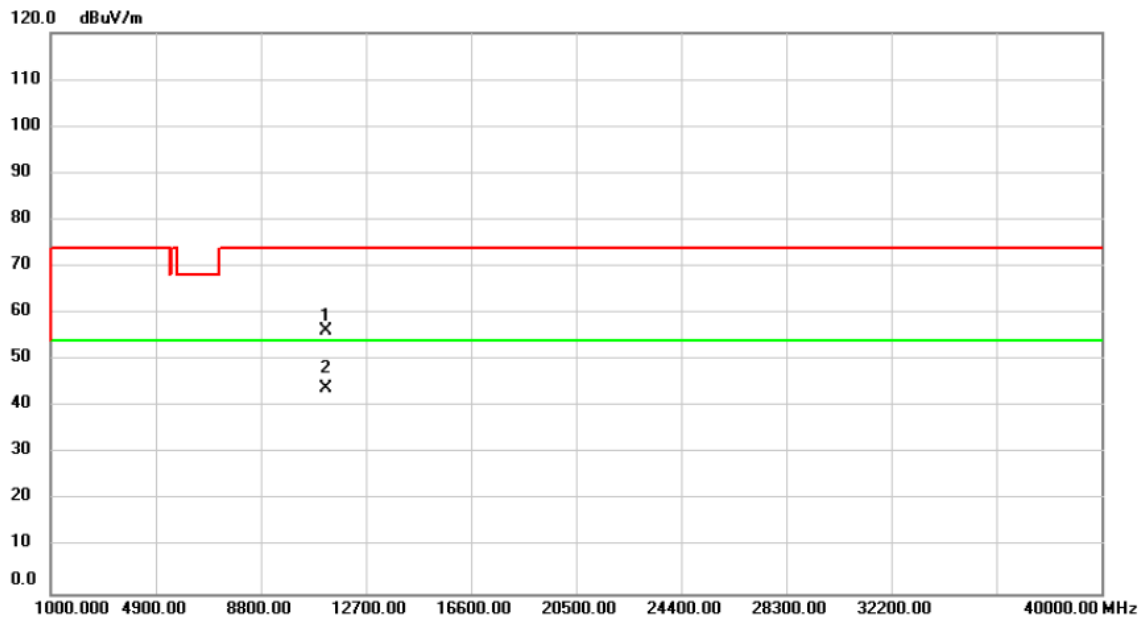

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11220.00	53.08	3.10	56.18	74.00	-17.82	peak	
2 *	11220.00	40.99	3.10	44.09	54.00	-9.91	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz


Horizontal

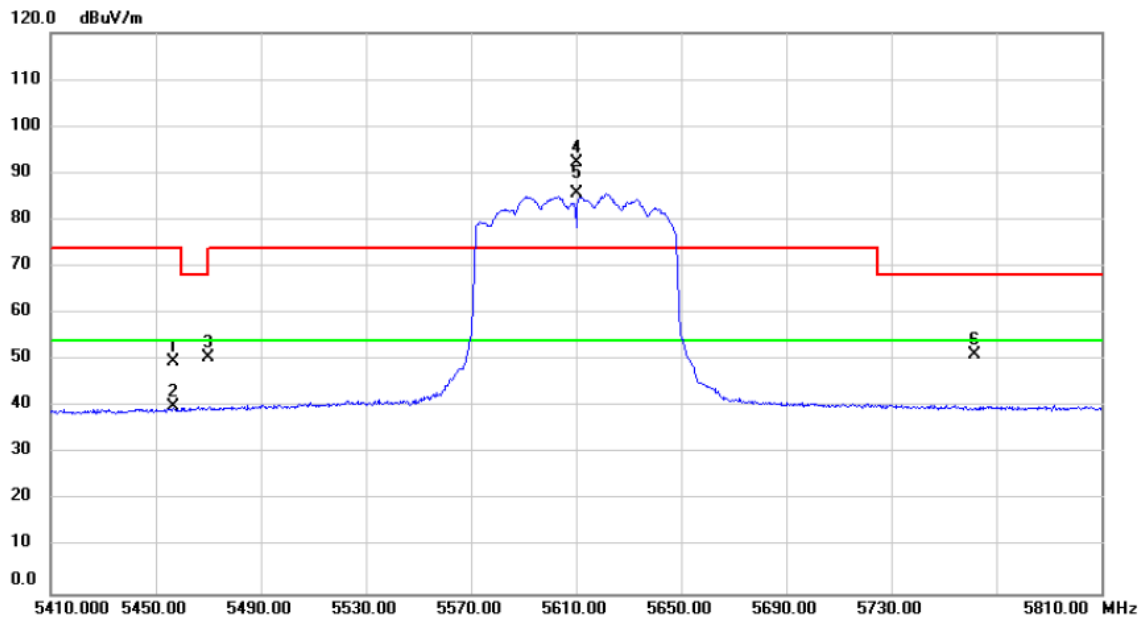

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5456.750	11.72	37.87	49.59	74.00	-24.41	peak	
2		5456.750	2.24	37.87	40.11	74.00	-33.89	peak	
3		5469.830	12.55	37.89	50.44	68.20	-17.76	peak	
4	X	5610.000	53.95	38.22	92.17	74.00	18.17	peak	No Limit
5	*	5610.000	47.34	38.22	85.56	54.00	31.56	AVG	No Limit
6		5761.890	12.53	38.63	51.16	68.20	-17.04	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz


Horizontal

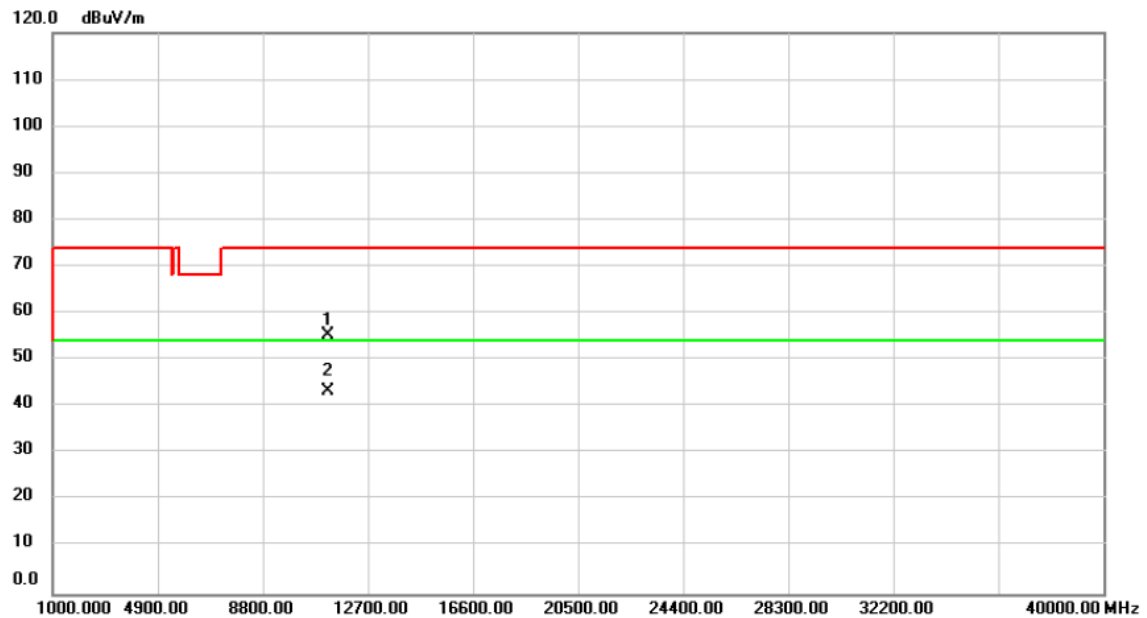

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11220.00	52.29	3.10	55.39	74.00	-18.61	peak	
2	*	11220.00	40.28	3.10	43.38	54.00	-10.62	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Vertical

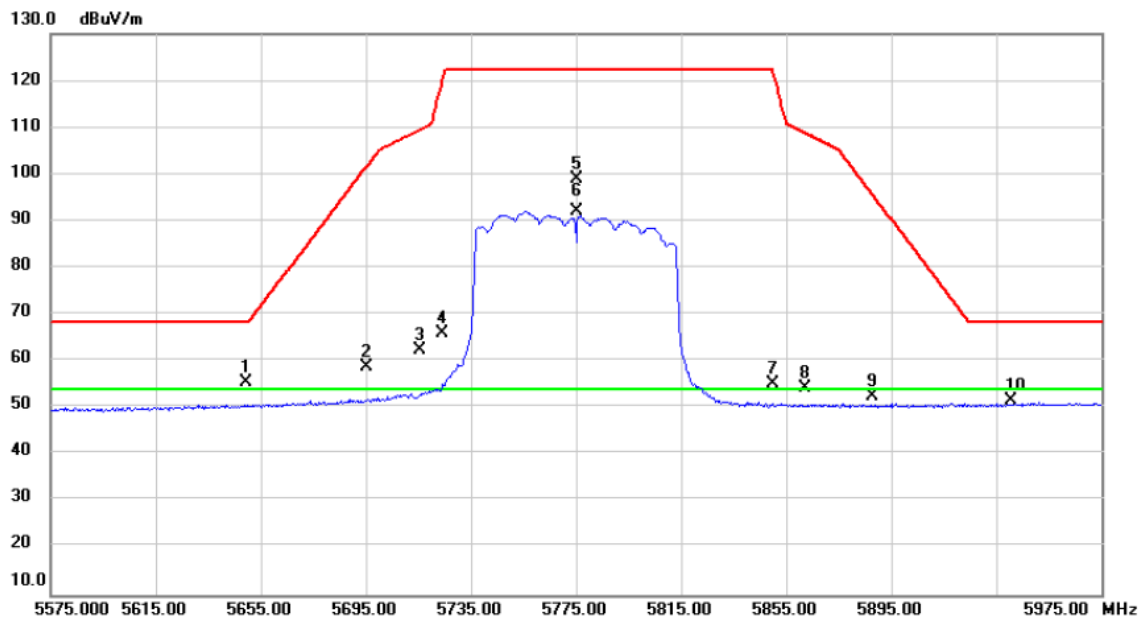

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5649.250	17.09	38.33	55.42	68.20	-12.78	peak	
2		5695.500	20.28	38.45	58.73	101.87	-43.14	peak	
3		5715.700	23.90	38.51	62.41	109.60	-47.19	peak	
4		5724.100	27.33	38.53	65.86	120.15	-54.29	peak	
5		5775.000	60.38	38.67	99.05	122.20	-23.15	peak	No Limit
6	*	5775.000	53.41	38.67	92.08	54.00	38.08	A/G	No Limit
7		5850.060	16.29	38.87	55.16	122.06	-66.90	peak	
8		5862.060	15.42	38.91	54.33	108.82	-54.49	peak	
9		5888.050	13.44	38.97	52.41	95.54	-43.13	peak	
10		5940.850	12.53	39.12	51.65	68.20	-16.55	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Vertical

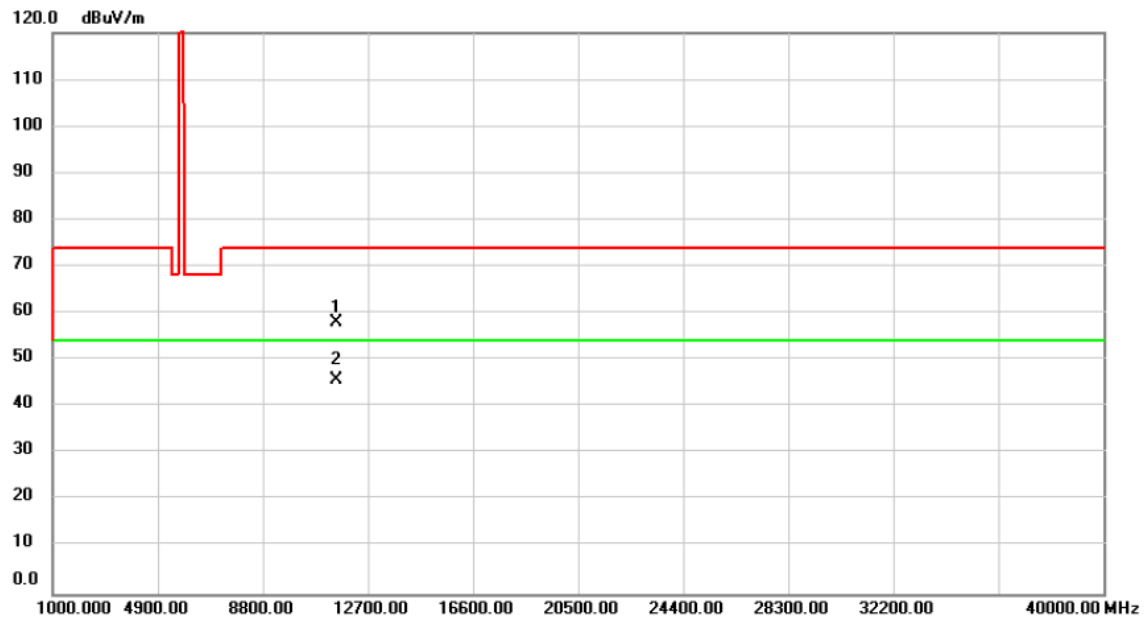

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.00	54.66	3.32	57.98	74.00	-16.02	peak	
2	*	11550.00	42.35	3.32	45.67	54.00	-8.33	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Horizontal

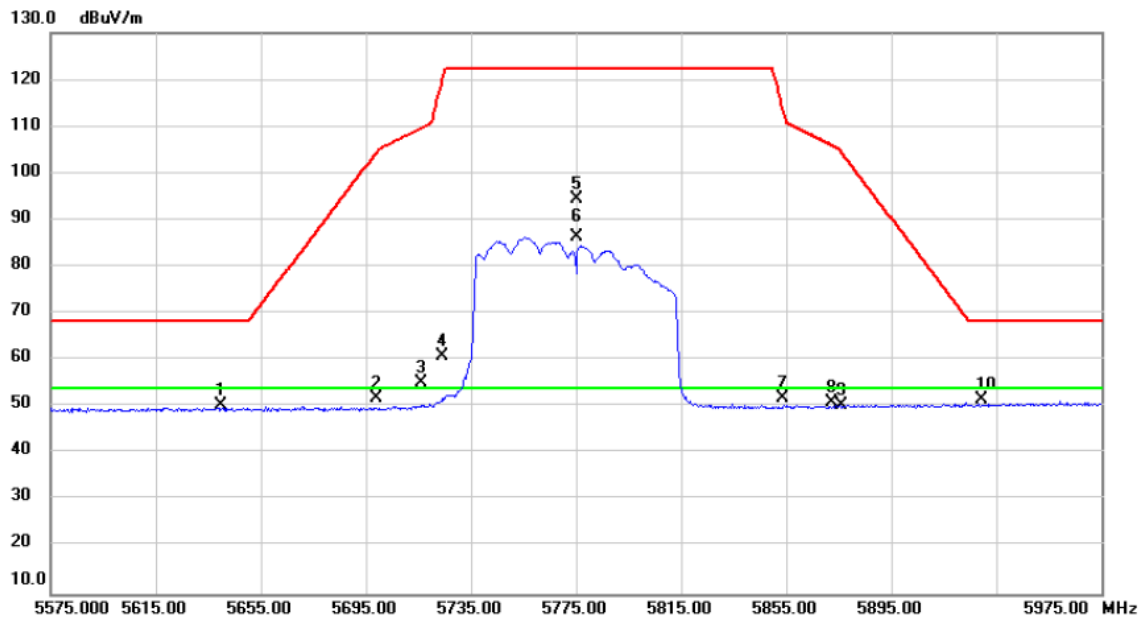

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5639.650	12.01	38.30	50.31	68.20	-17.89	peak	
2	5699.100	13.26	38.46	51.72	104.53	-52.81	peak	
3	5716.040	16.64	38.51	55.15	109.69	-54.54	peak	
4	5724.135	22.44	38.53	60.97	120.23	-59.26	peak	
5	5775.000	55.65	38.67	94.32	122.20	-27.88	peak	No Limit
6 *	5775.000	47.56	38.67	86.23	54.00	32.23	AVG	No Limit
7	5853.745	12.98	38.89	51.87	113.66	-61.79	peak	
8	5872.440	11.87	38.94	50.81	105.92	-55.11	peak	
9	5876.200	11.51	38.94	50.45	104.31	-53.86	peak	
10	5929.325	12.60	39.09	51.69	68.20	-16.51	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal

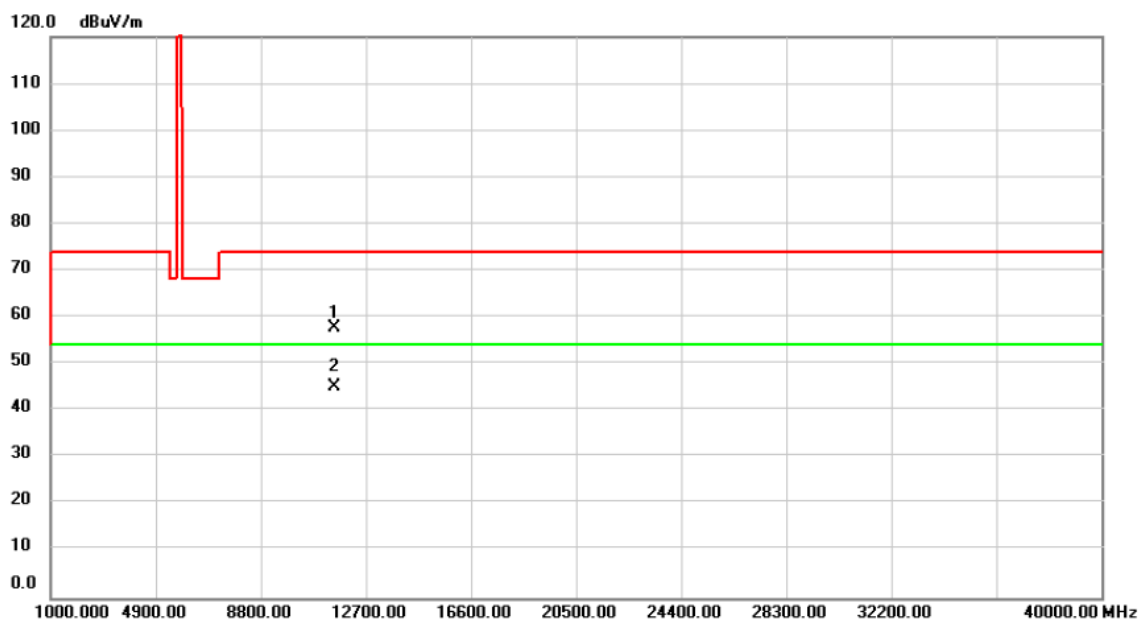

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11550.00	54.31	3.32	57.63	74.00	-16.37	peak	
2 *	11550.00	41.73	3.32	45.05	54.00	-8.95	AVG	

TX A Mode_DUTY CYCLE

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 2.06 msec

T_{Total} : 2.16 msec

Duty cycle: 95.37%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.21

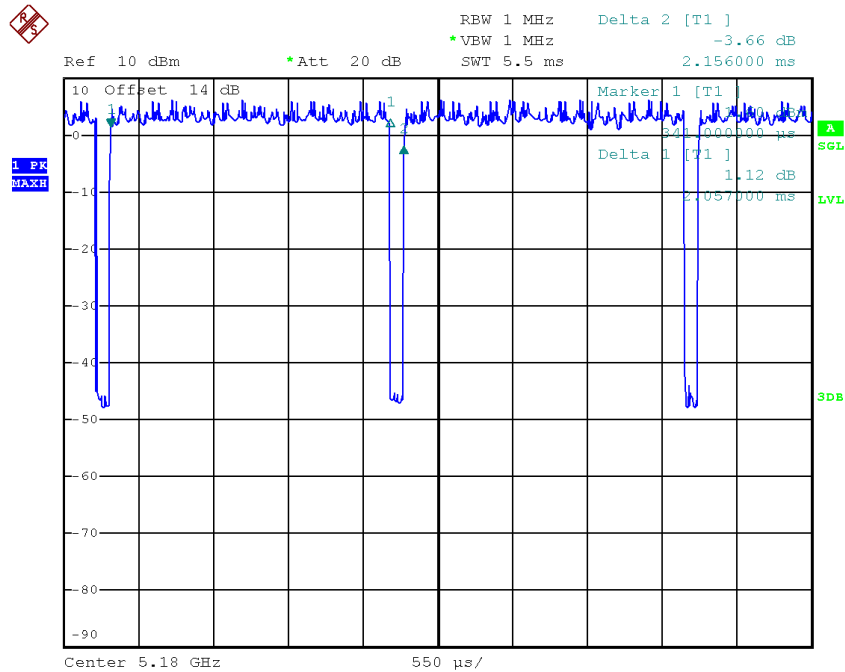

Date: 10.MAY.2017 16:34:18

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 1.94 msec

T_{Total} : 2.04 msec

Duty cycle: 95.10%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.22

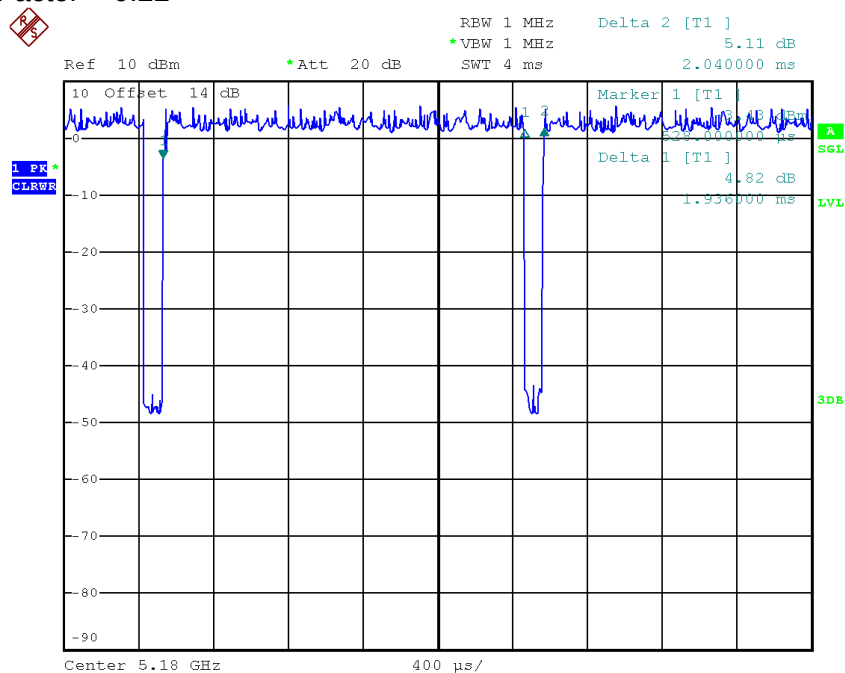

Date: 10.MAY.2017 16:34:51

Note: The EUT was programmed to be in countinuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducy factor
 Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHz

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 0.92 msec

T_{Total} : 1.05 msec

Duty cycle: 87.62%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.57

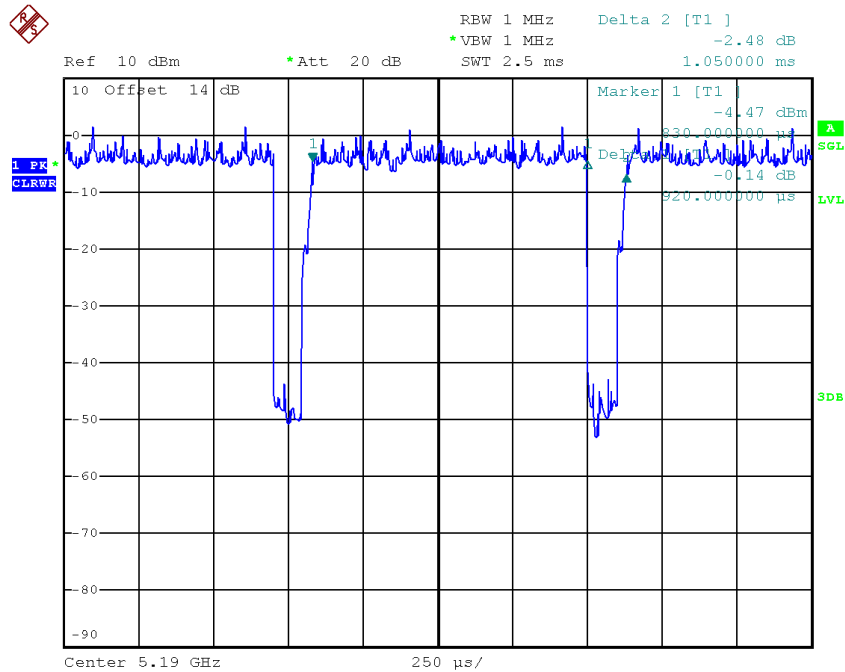

Date: 10.MAY.2017 16:36:23

Note: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be calculated as Output Power = Measured power + Duty factor
Power Spectral Density = Measured density + Duty factor

TX AC80 Mode_DUTY CYCLE

Duty cycle: TX DUTYMHZ

Duty cycle = T_{ON} / T_{Total}


T_{ON} : 100000.00 msec

T_{Total} : 100000.00 msec

Duty cycle: 100.00%

Duty Factor = $10 \log(1/\text{Duty cycle})$

Duty Factor = 0.00

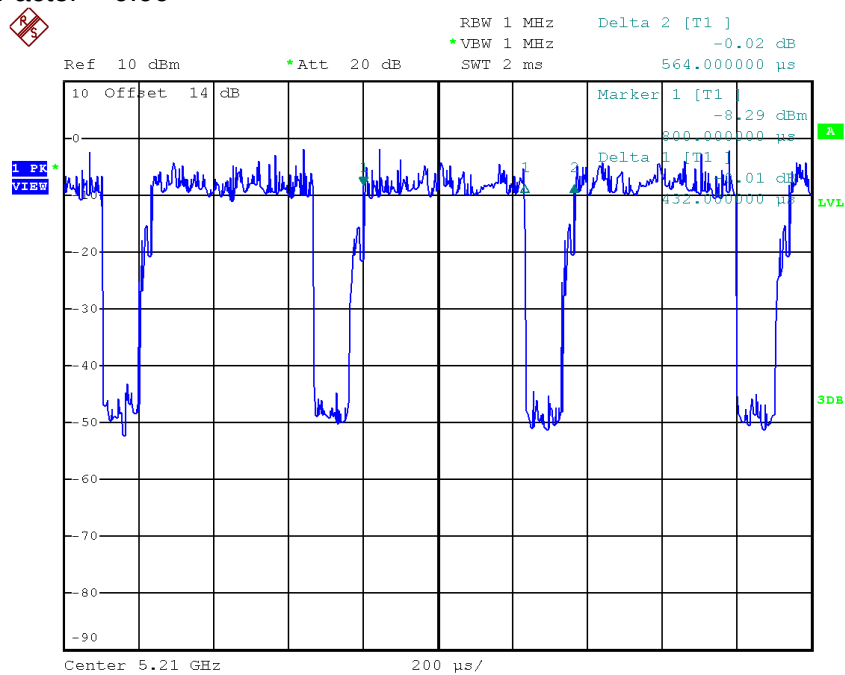

Date: 10.MAY.2017 16:58:43


Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as Output Power = Measured power + Ducy factor
 Power Spectral Density = Measured density + Duty factor

ATTACHMENT E - BANDWIDTH

Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	19.75	16.40
CH40	5200	19.45	16.40
CH48	5240	19.75	16.40

TX CH36

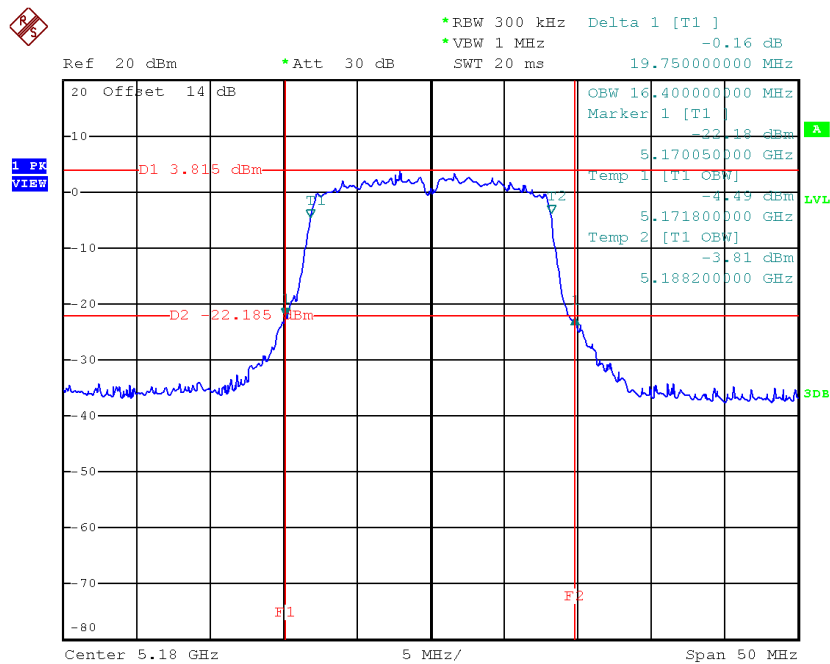


Date: 8.MAY.2017 15:24:16

TX CH40

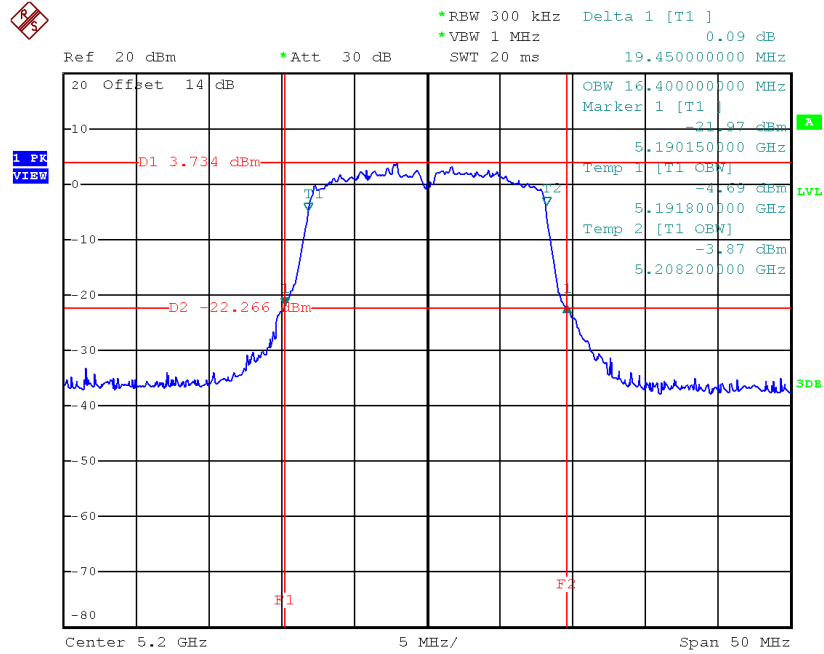

Date: 8.MAY.2017 15:26:23

TX CH48

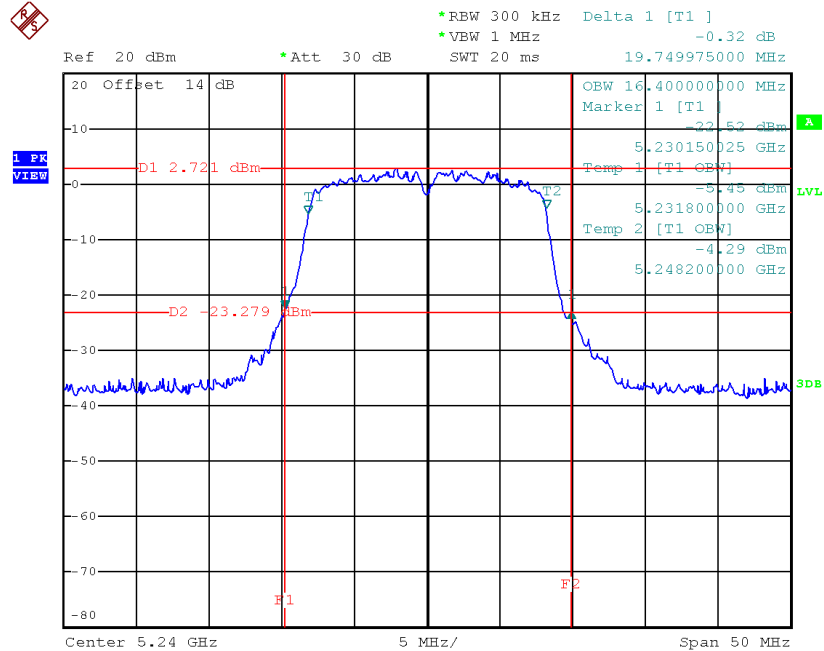


Date: 8.MAY.2017 15:29:33

Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.69	17.40
CH40	5200	20.65	17.50
CH48	5240	20.49	17.50

TX CH36

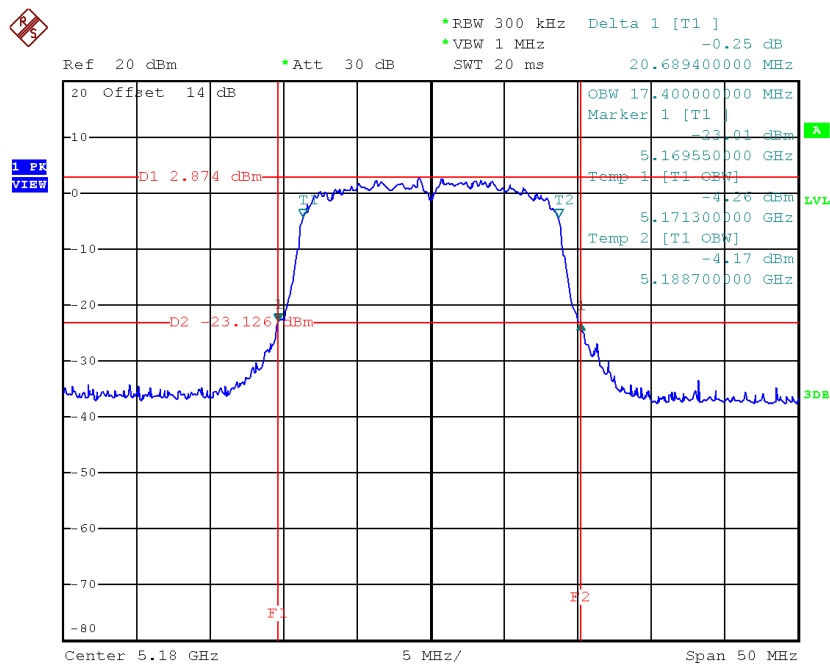


Date: 8.MAY.2017 15:53:53

TX CH40

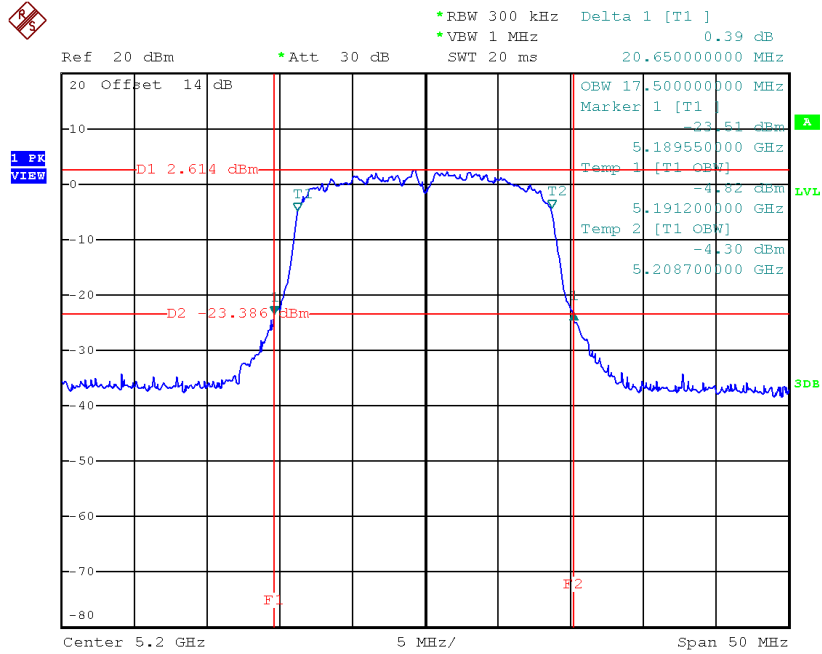

Date: 8.MAY.2017 15:55:31

TX CH48

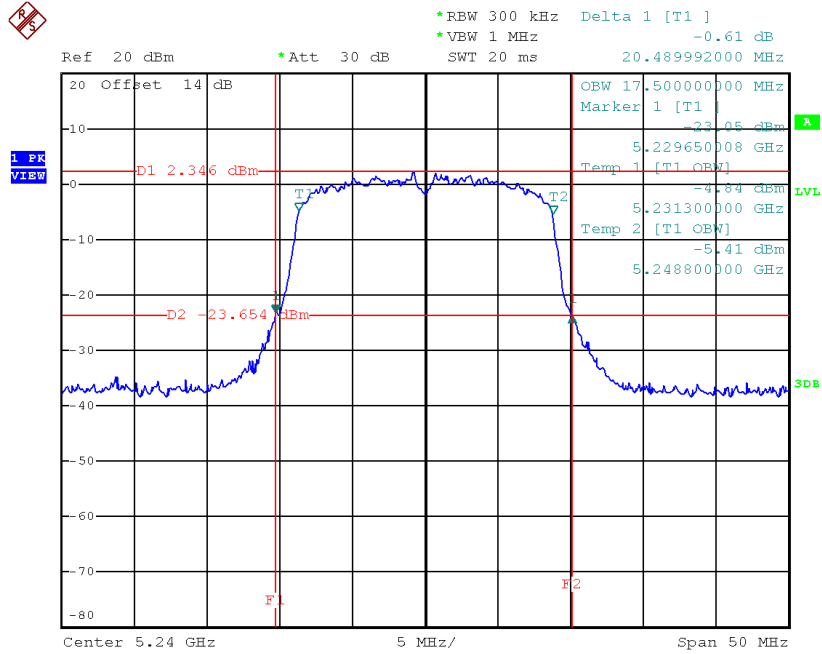


Date: 8.MAY.2017 16:00:51

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	40.10	36.00
CH46	5230	40.30	36.00

TX CH38

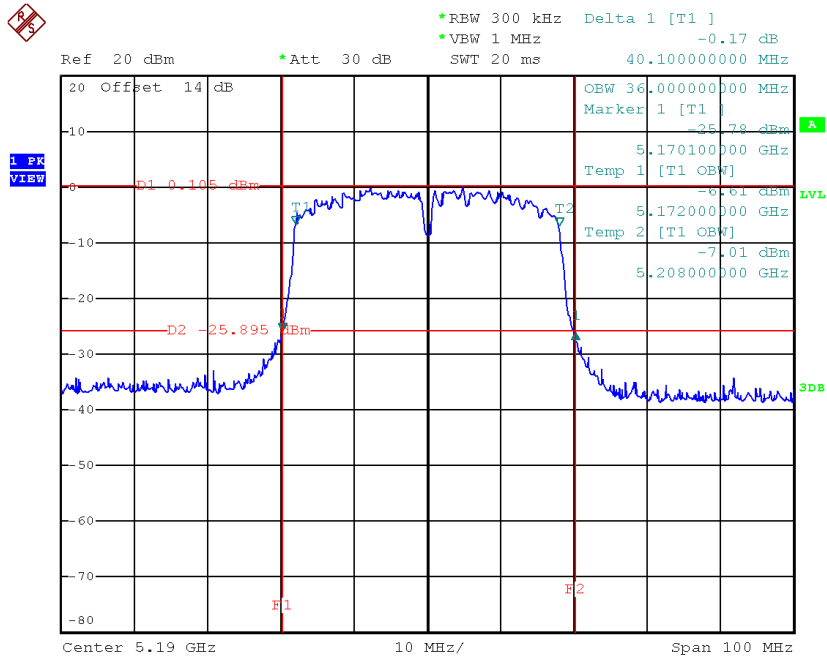

Date: 8.MAY.2017 16:18:35

TX CH46

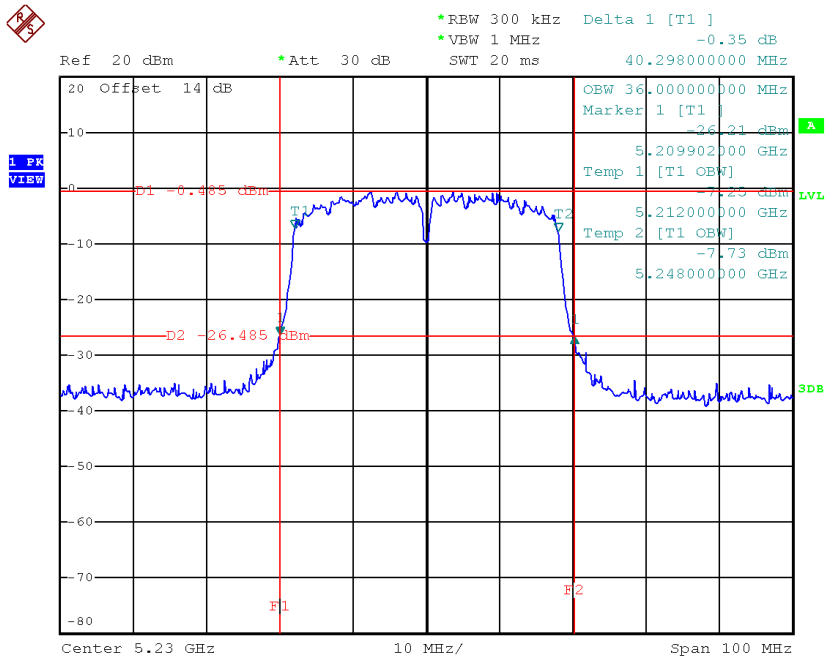


Date: 8.MAY.2017 16:21:41

Test Mode: UNII-2A/TX A Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	19.19	16.40
CH60	5300	19.30	16.40
CH64	5320	19.39	16.40

TX CH52

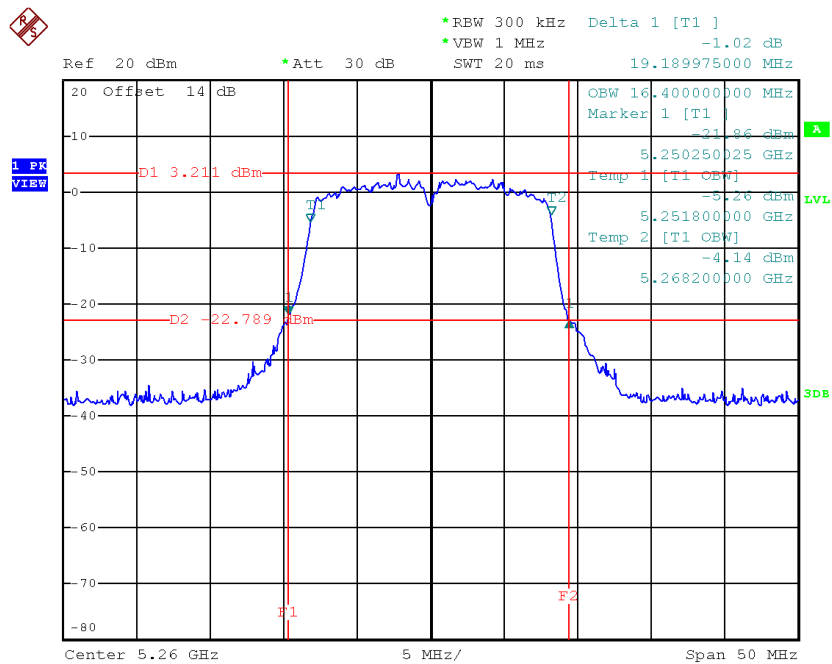


Date: 8.MAY.2017 15:30:37

TX CH60

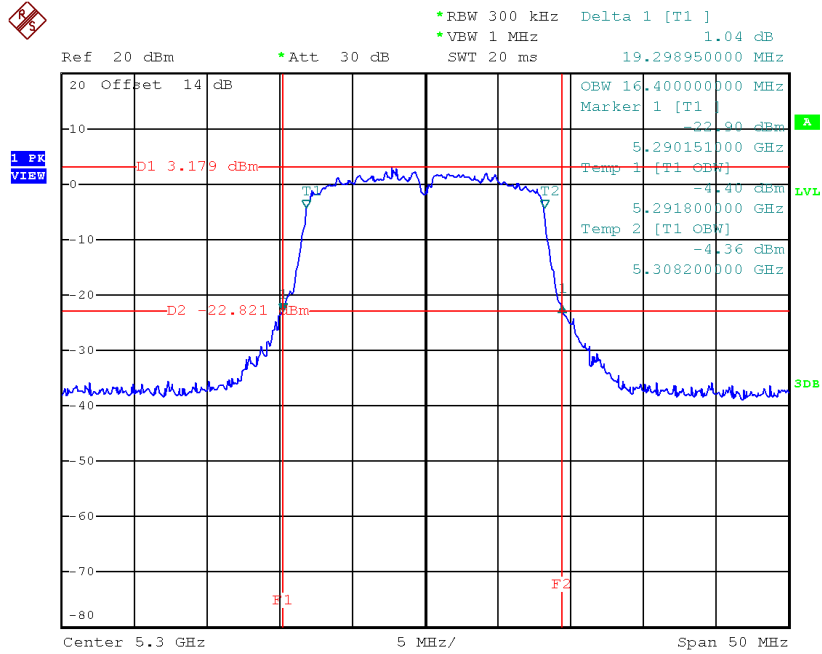

Date: 8.MAY.2017 15:32:39

TX CH64

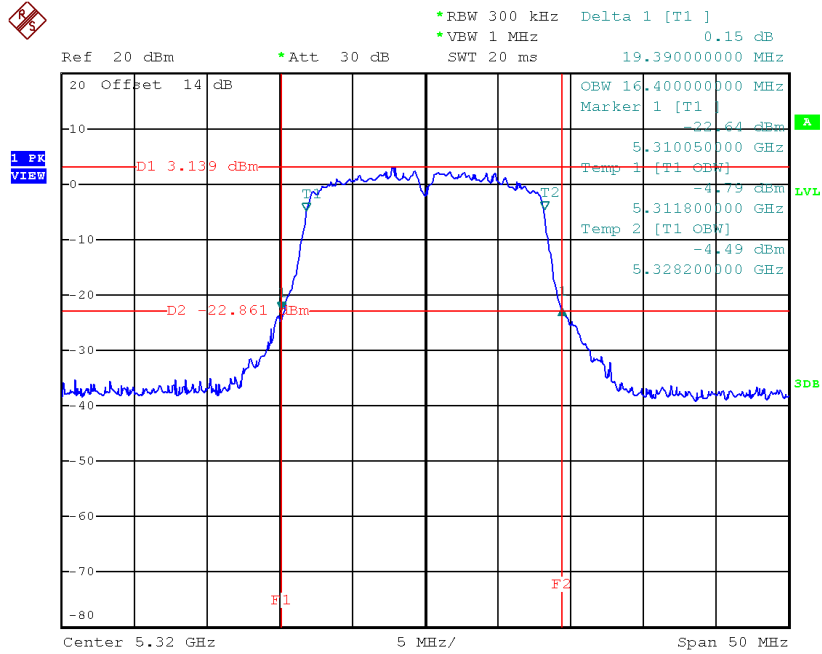


Date: 8.MAY.2017 15:33:37

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	20.59	17.50
CH60	5300	20.59	17.50
CH64	5320	20.59	17.60

TX CH52

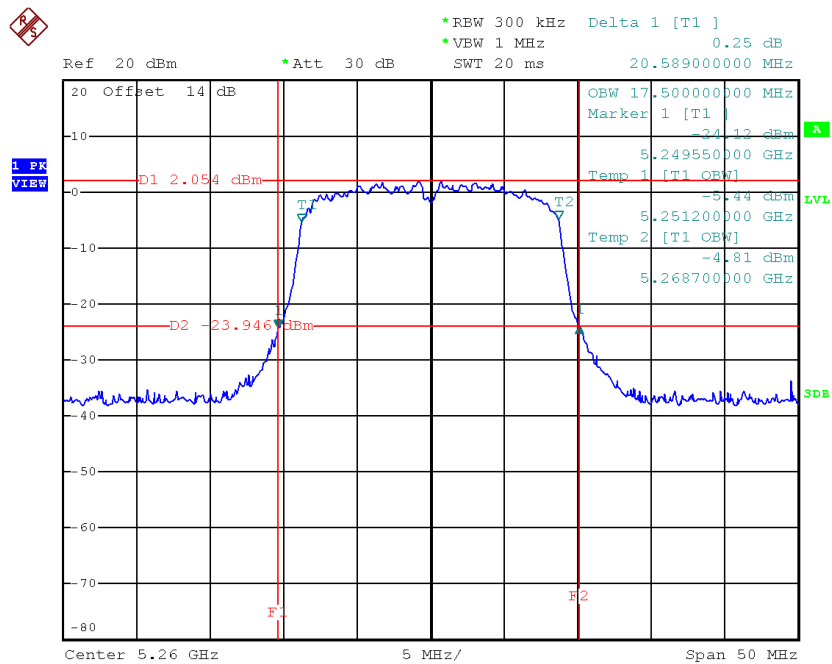


Date: 8.MAY.2017 16:05:38

TX CH60

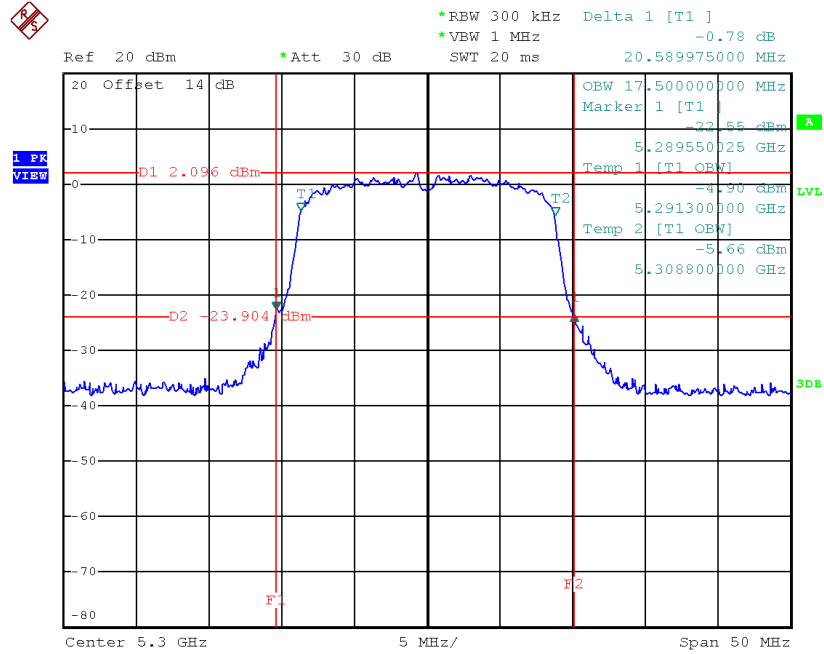

Date: 8.MAY.2017 16:06:38

TX CH64

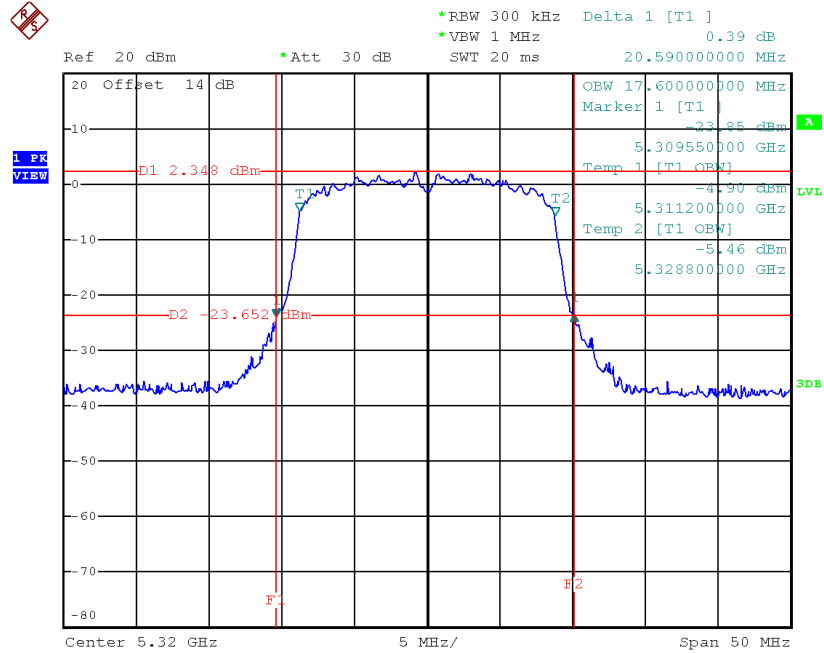


Date: 8.MAY.2017 16:13:00

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	40.30	36.00
CH62	5310	39.82	36.00

TX CH54

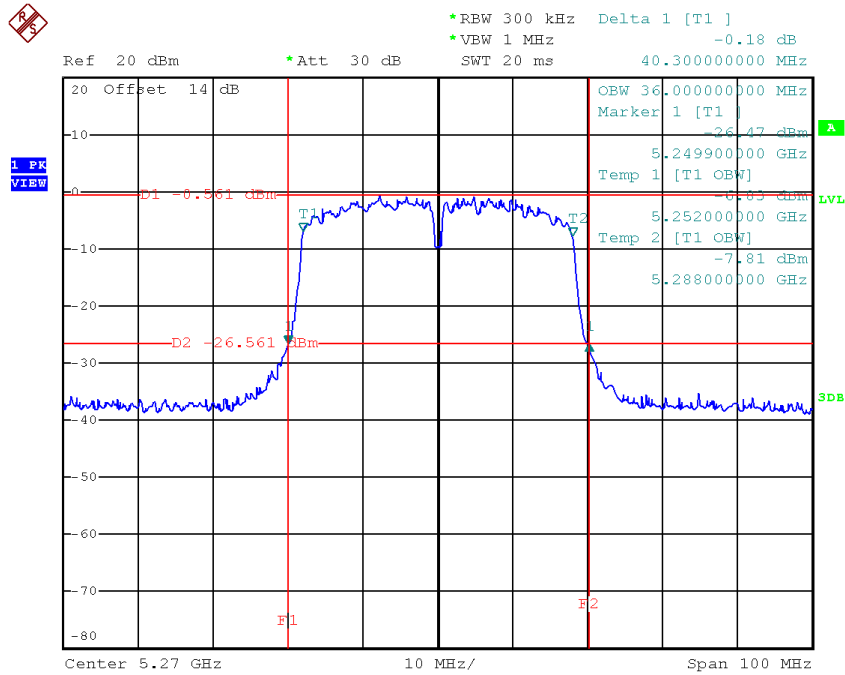

Date: 8.MAY.2017 16:22:55

TX CH62

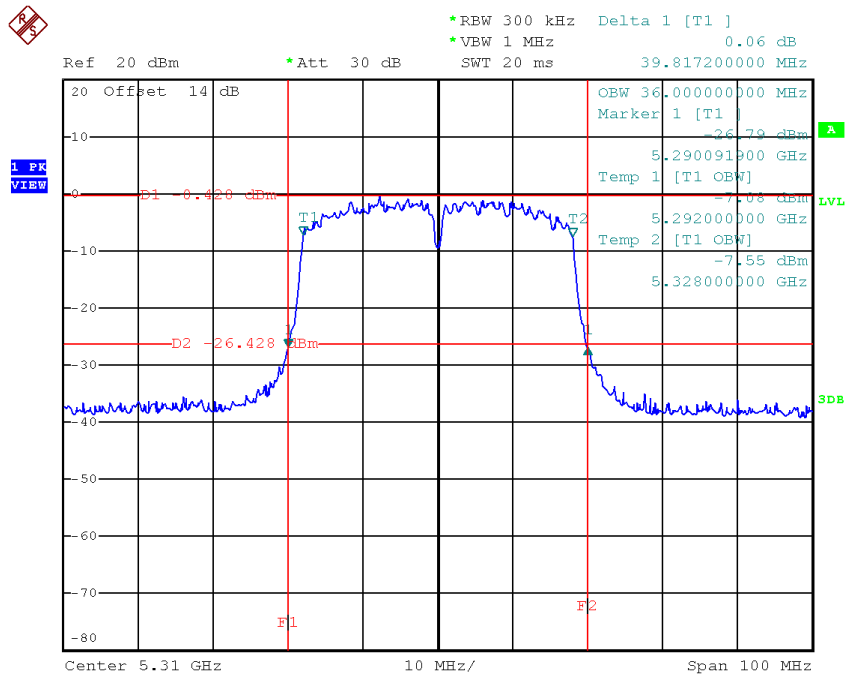


Date: 8.MAY.2017 16:24:39

Test Mode: UNII-2C/TX A Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	19.15	16.40
CH116	5580	19.30	16.40
CH140	5700	19.49	16.40

TX CH100

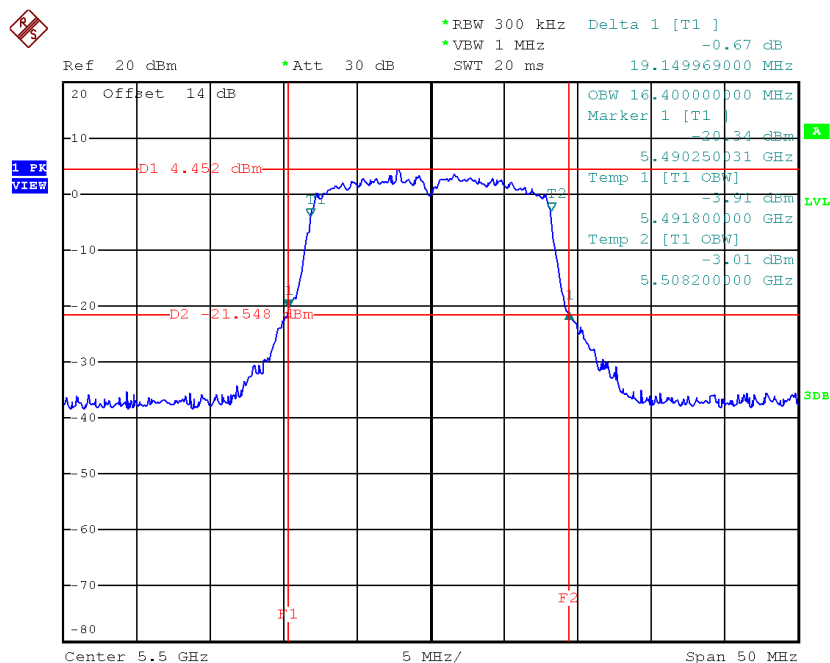


Date: 10.MAY.2017 15:16:43

TX CH116

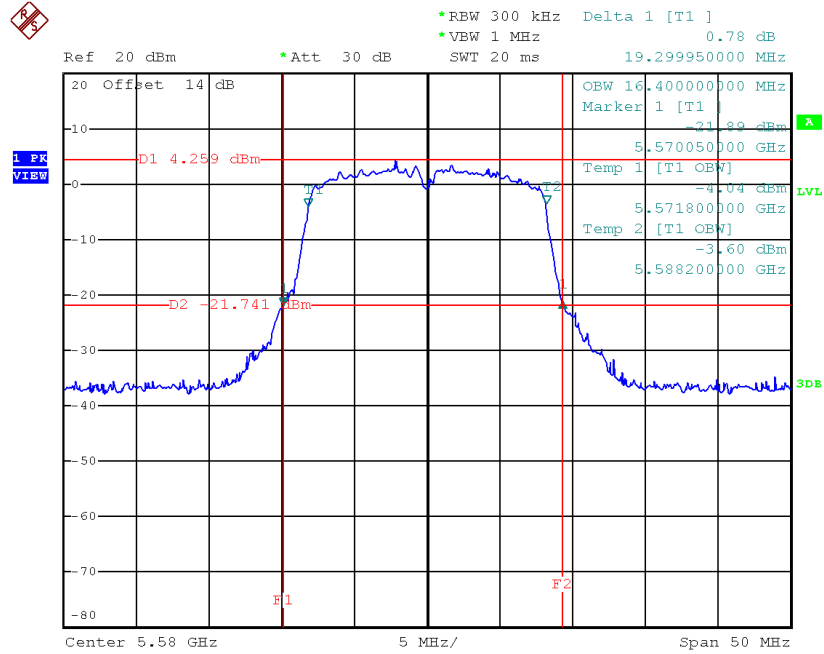

Date: 10.MAY.2017 15:17:53

TX CH140

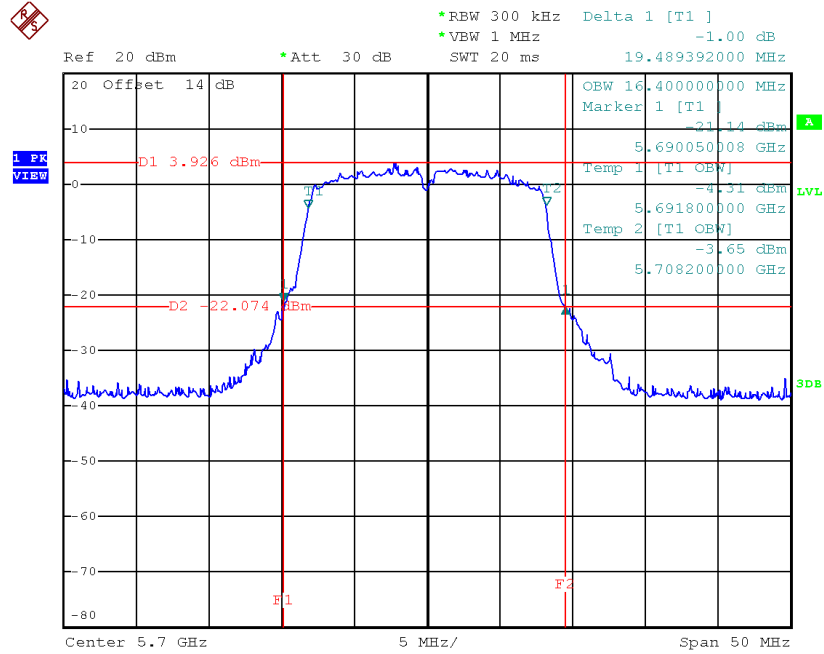


Date: 10.MAY.2017 15:19:56

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	20.55	17.40
CH116	5580	20.45	17.50
CH140	5700	20.70	17.50

TX CH100

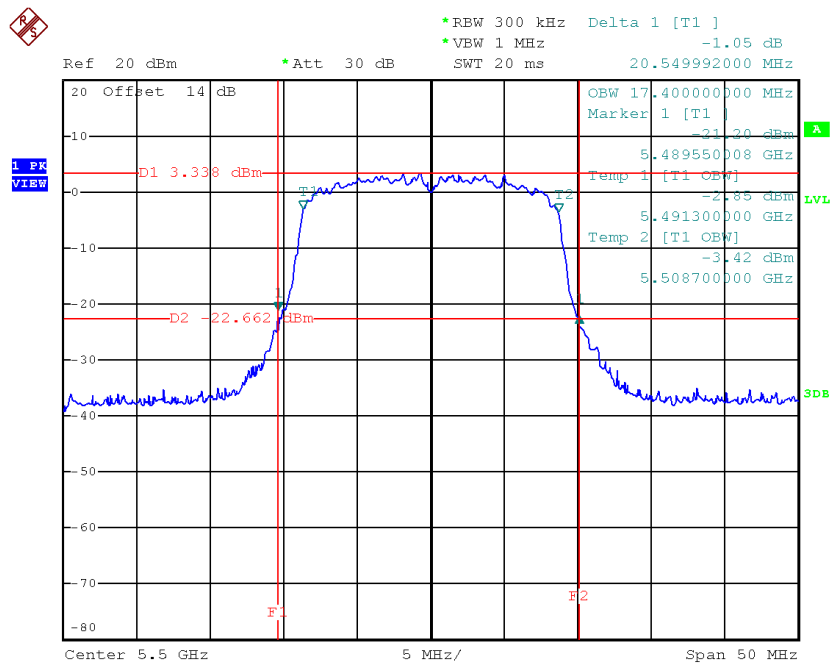


Date: 10.MAY.2017 16:06:09

TX CH116

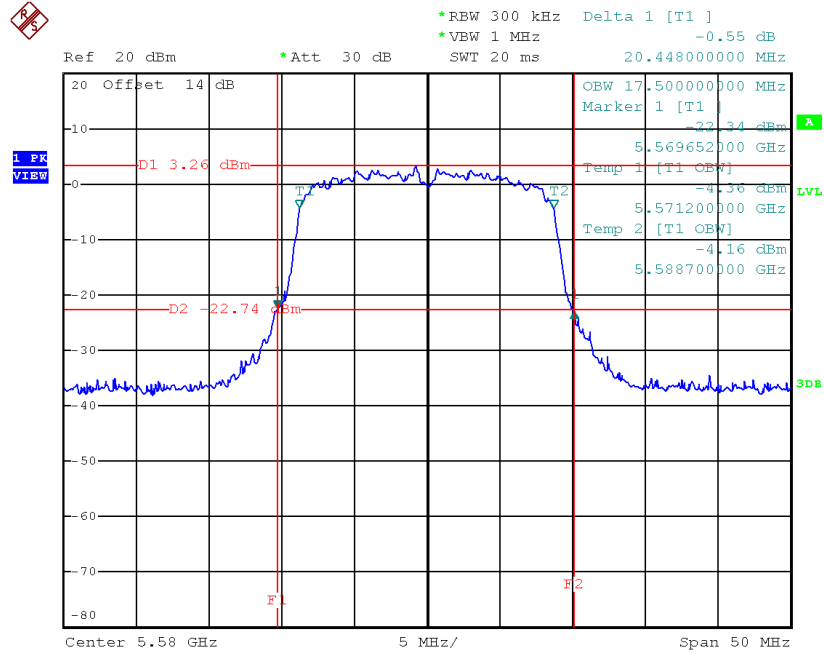

Date: 10.MAY.2017 16:08:39

TX CH140

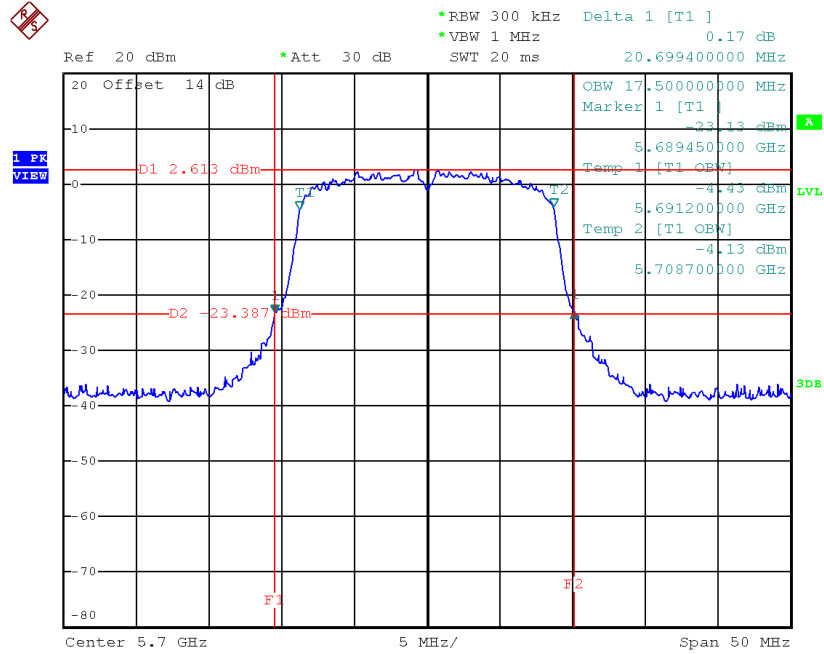


Date: 10.MAY.2017 16:12:55

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	40.19	36.00
CH110	5550	39.80	35.80
CH134	5670	40.19	36.00

TX CH102

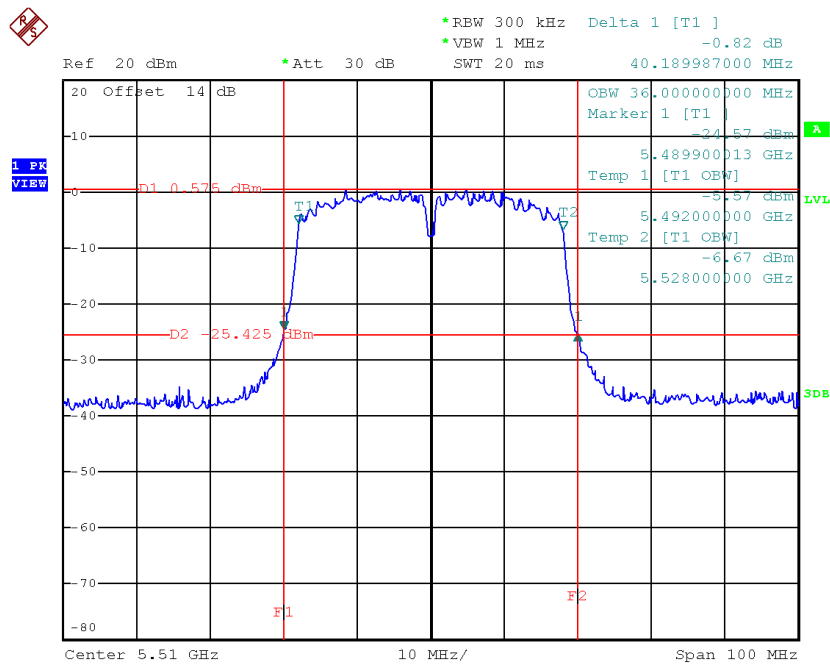


Date: 10.MAY.2017 15:51:45

TX CH110

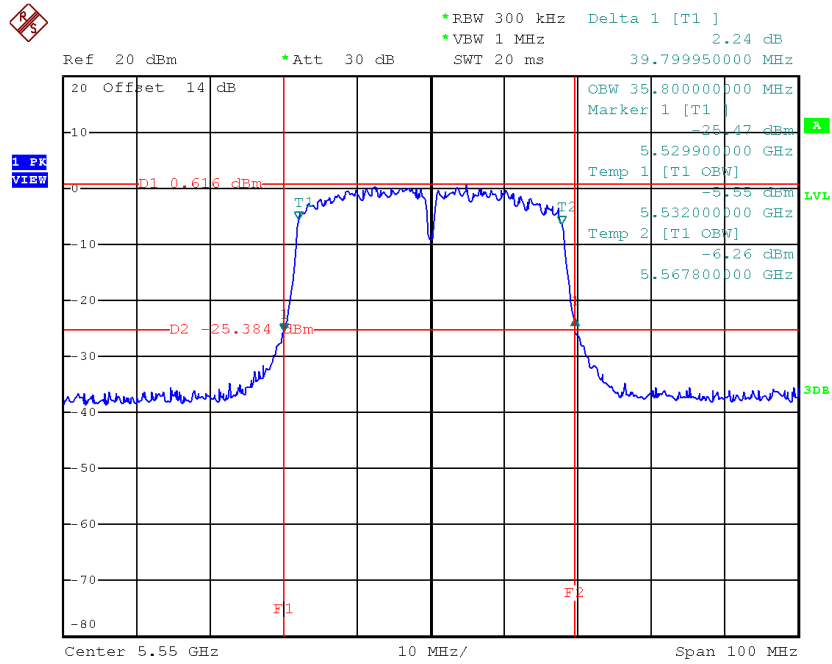

Date: 10.MAY.2017 15:55:40

TX CH134

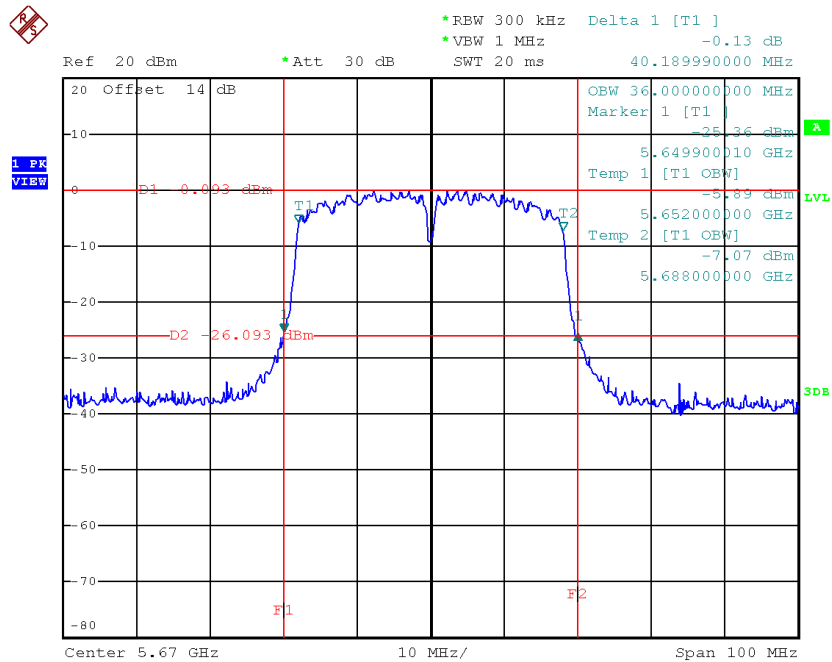


Date: 10.MAY.2017 15:57:06

Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	15.66	16.30	>=500
CH157	5785	15.09	16.30	>=500
CH165	5825	15.50	16.30	>=500

TX CH 149

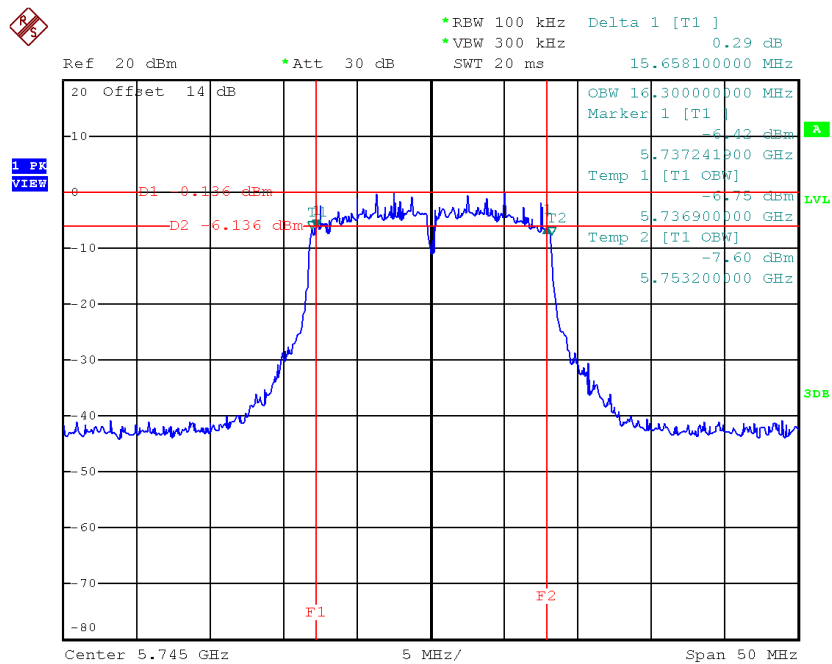


Date: 10.MAY.2017 15:21:20

TX CH 157

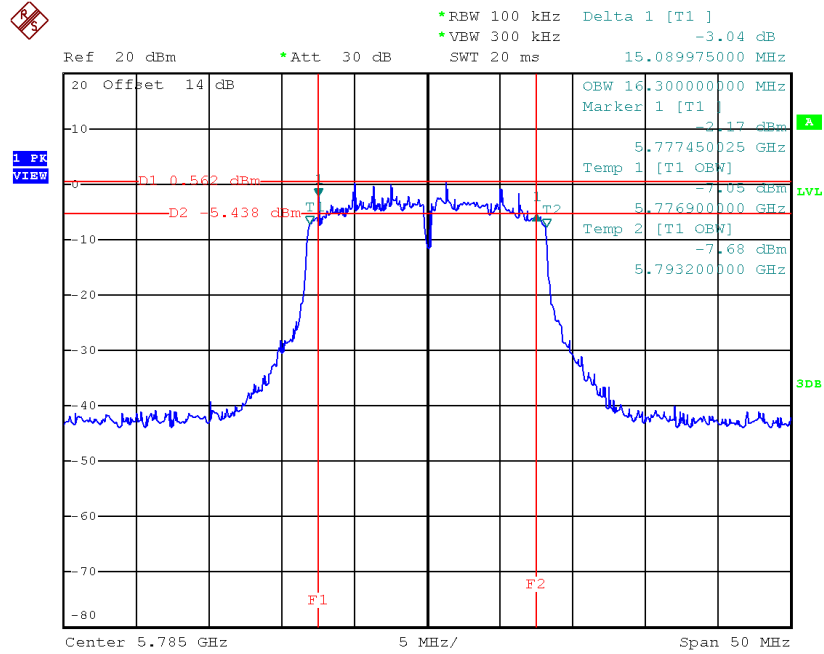

Date: 10.MAY.2017 15:23:05

TX CH 165

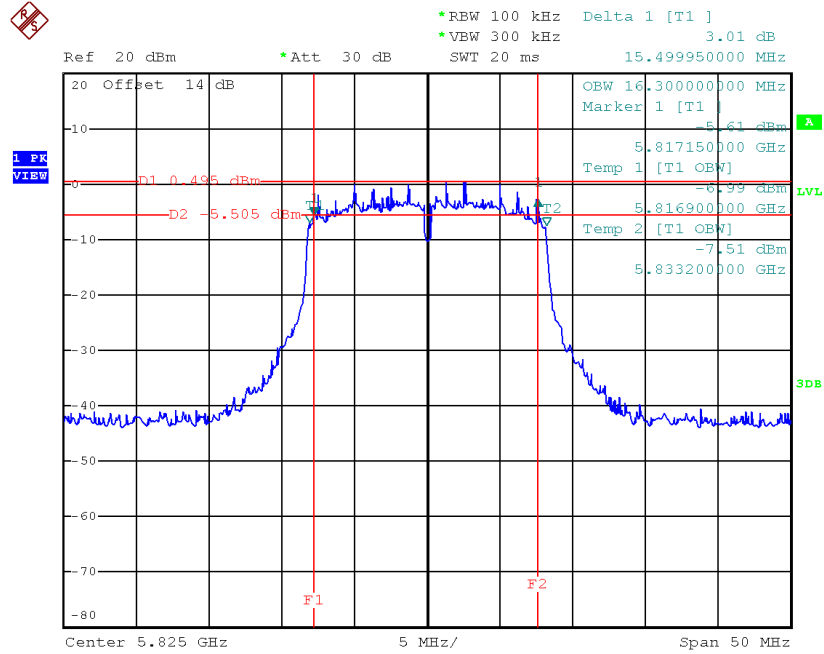


Date: 10.MAY.2017 15:24:23

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	15.50	17.40	>=500
CH157	5785	15.20	17.40	>=500
CH165	5825	15.09	17.40	>=500

TX CH 149

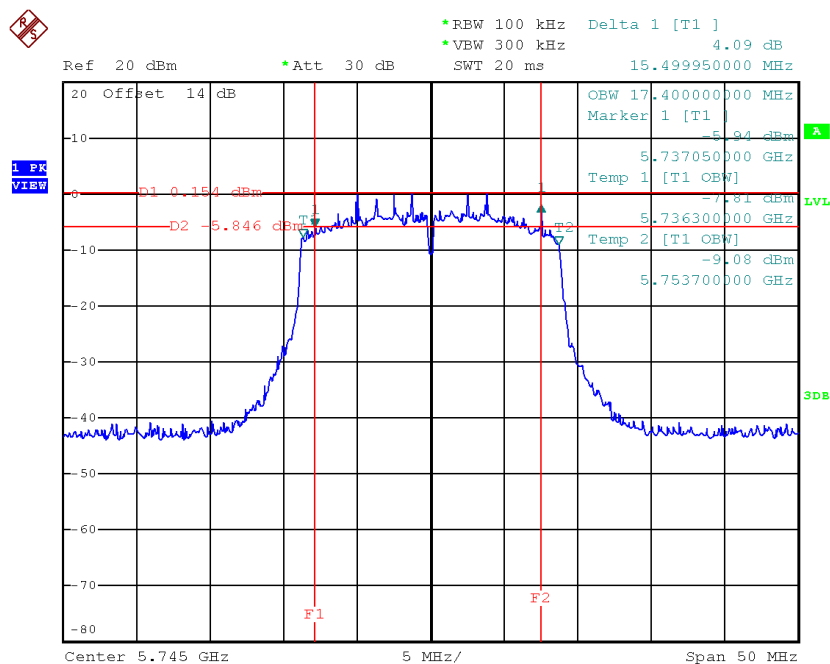


Date: 10.MAY.2017 16:16:07

TX CH 157

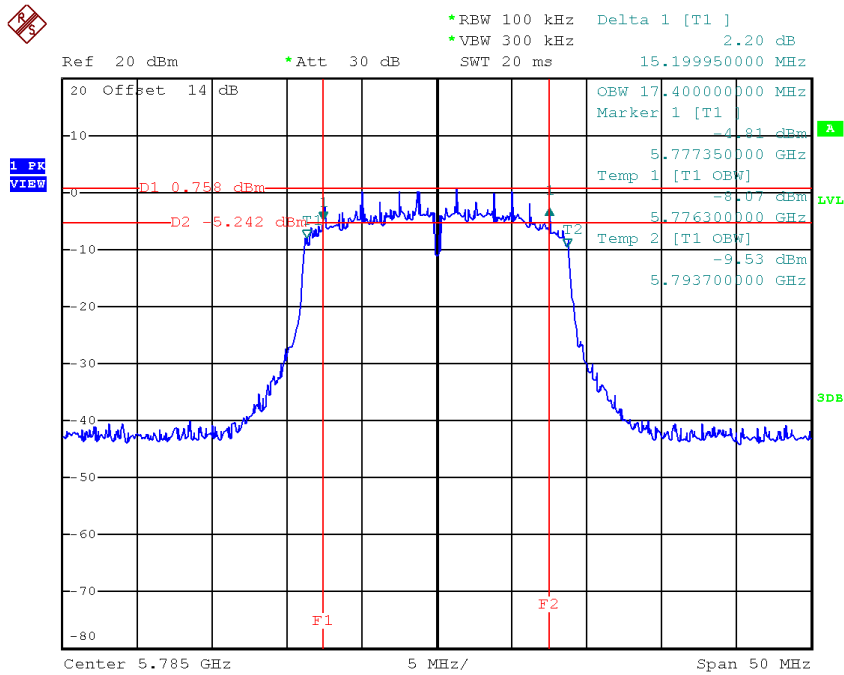

Date: 10.MAY.2017 16:18:16

TX CH 165

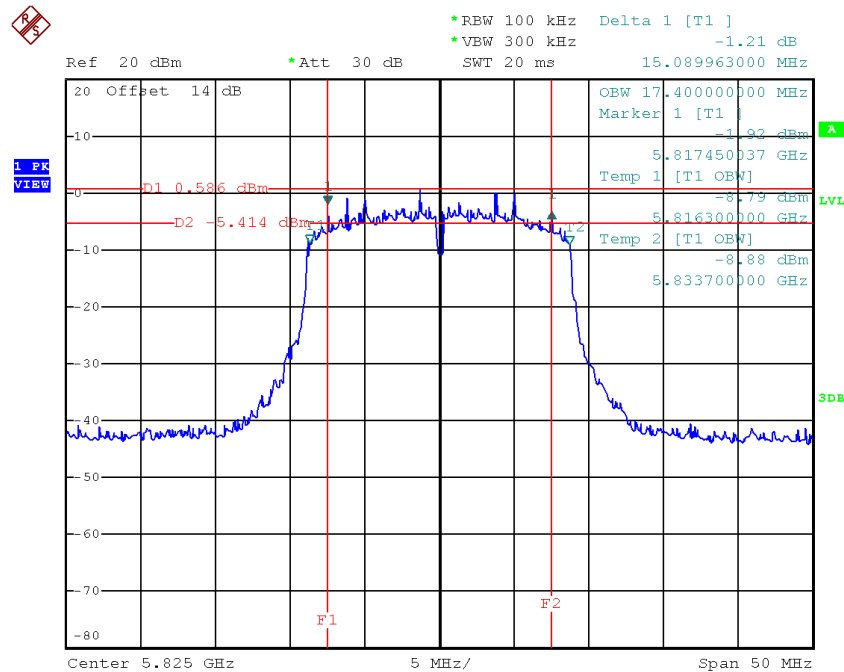


Date: 10.MAY.2017 16:21:04

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	31.80	36.00	≥ 500
CH159	5795	34.20	36.00	≥ 500

TX CH 151

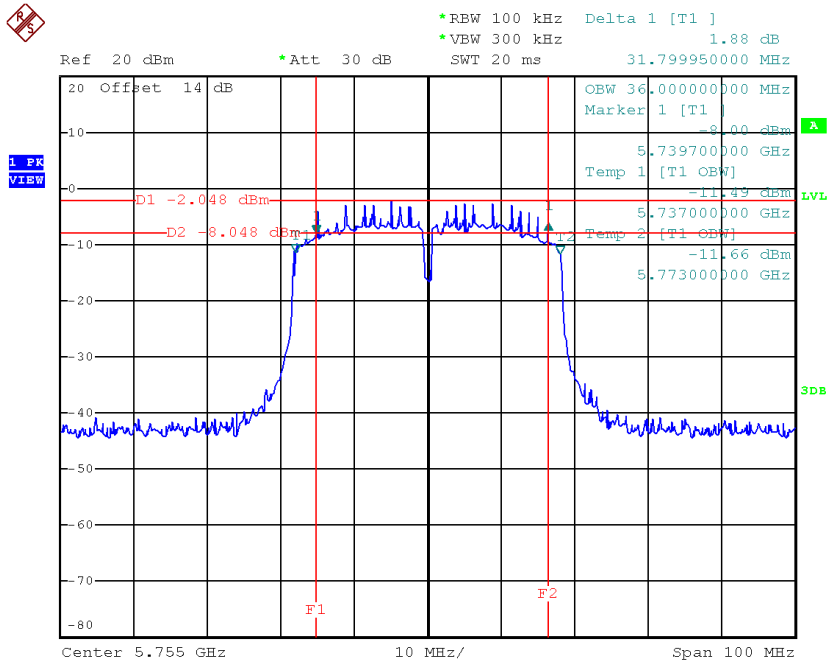

Date: 10.MAY.2017 16:00:44

TX CH 159

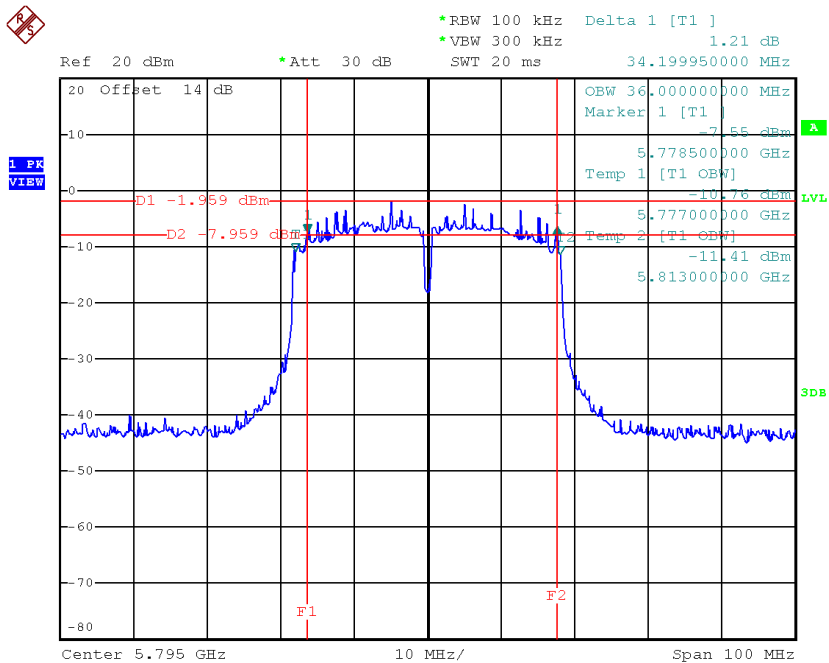


Date: 10.MAY.2017 16:02:04

Test Mode: UNII-1/TX AC80 Mode_CH42

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	81.80	75.20

TX CH42

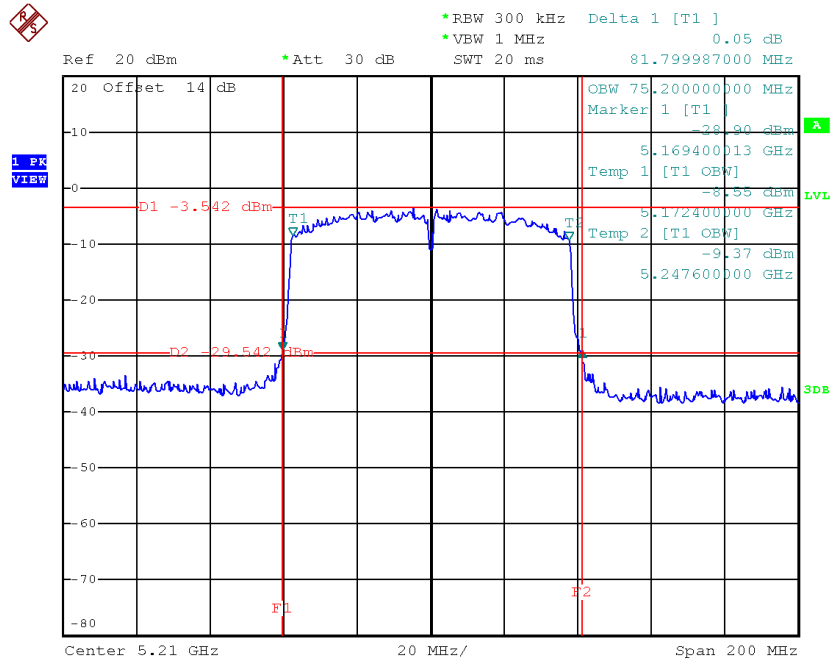


Date: 8.MAY.2017 16:27:14

Test Mode: UNII-2A/TX AC80 Mode_CH58

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH58	5290	81.00	75.60

TX CH58

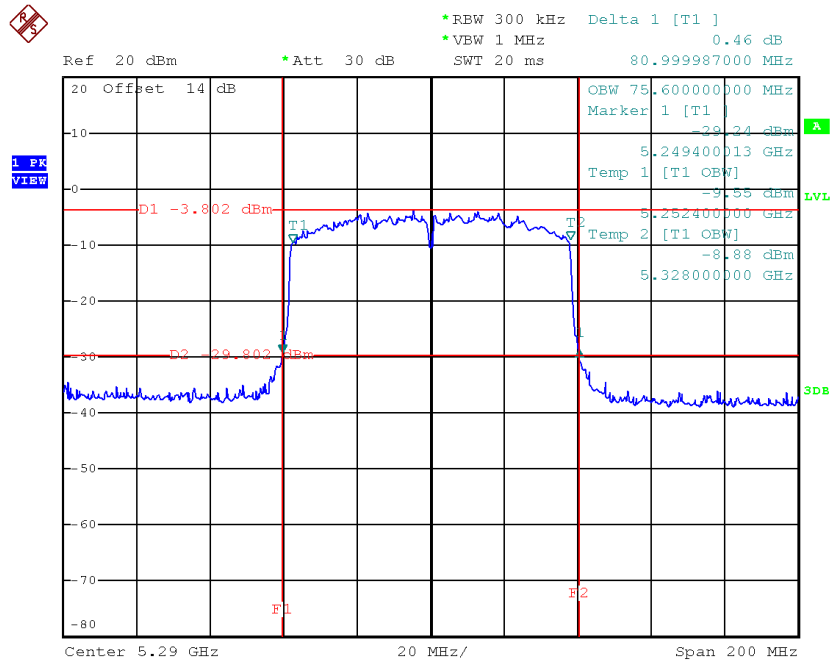


Date: 8.MAY.2017 16:28:36

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH106	5530	81.40	75.20
CH122	5610	82.20	75.60

TX CH106

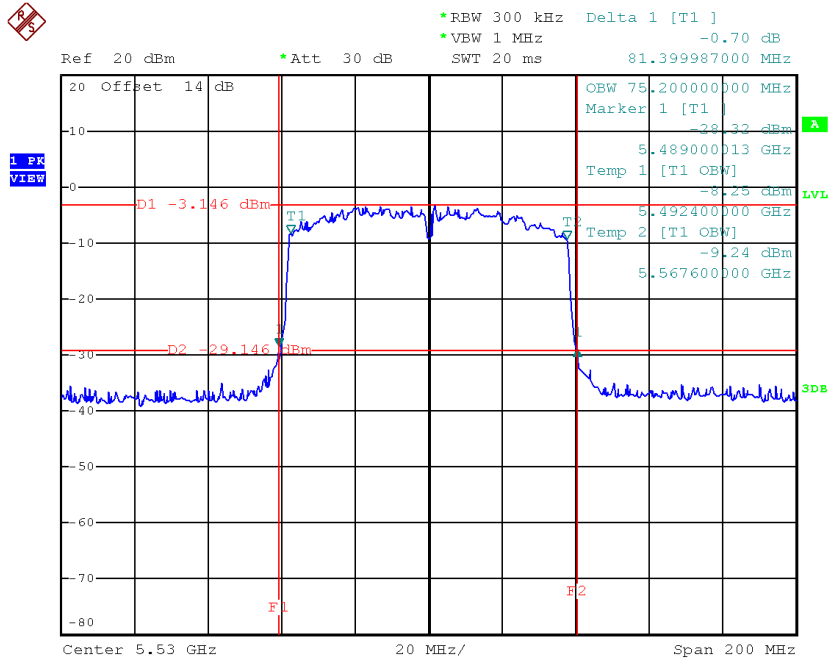

Date: 10.MAY.2017 16:24:37

TX CH122

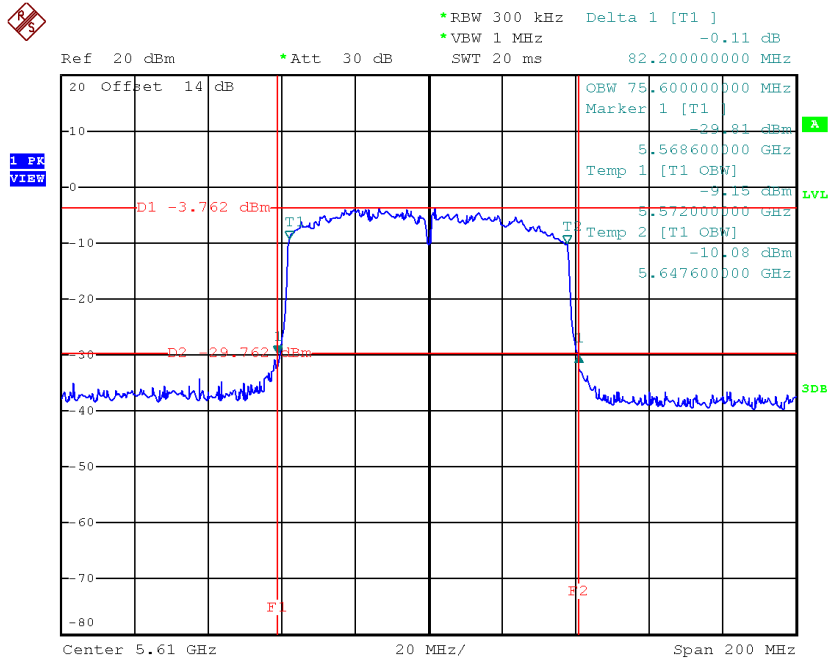


Date: 10.MAY.2017 16:27:52

Test Mode: UNII-3/ TX AC80 Mode_CH155

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH155	5775	75.40	75.20	>=500

TX CH 155

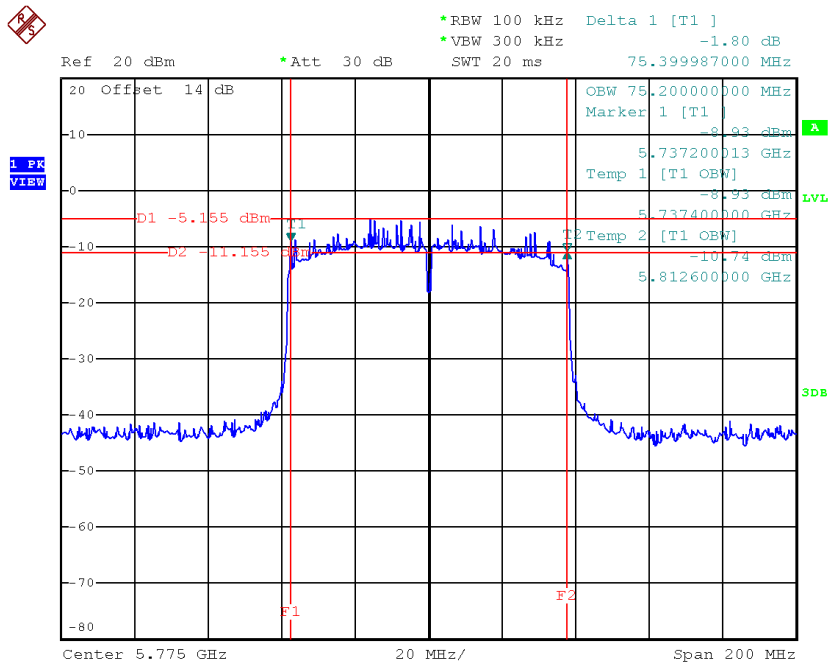

Date: 10.MAY.2017 16:29:46

ATTACHMENT F - MAXIMUM OUTPUT POWER

For 1TX

Test Mode: UNII-1/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	12.75	0.21	12.96	30.00	1.00
CH40	5200	12.54	0.21	12.75	30.00	1.00
CH48	5240	12.44	0.21	12.65	30.00	1.00

Test Mode: UNII-2A/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	12.37	0.21	12.58	24.00	0.25
CH60	5300	12.44	0.21	12.65	24.00	0.25
CH64	5320	12.30	0.21	12.51	24.00	0.25

Test Mode: UNII-2C/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	12.71	0.21	12.92	24.00	0.25
CH116	5580	12.55	0.21	12.76	24.00	0.25
CH140	5700	13.06	0.21	13.27	24.00	0.25

Test Mode: UNII-3/ TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	13.00	0.21	13.21	30.00	1.00
CH157	5785	13.04	0.21	13.25	30.00	1.00
CH165	5825	12.91	0.21	13.12	30.00	1.00

For 2TX

Test Mode: UNII-1/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	12.89	0.22	13.11	30.00	1.00
CH40	5200	12.75	0.22	12.97	30.00	1.00
CH48	5240	12.67	0.22	12.89	30.00	1.00

Test Mode: UNII-1/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	13.03	0.22	13.25	30.00	1.00
CH40	5200	12.83	0.22	13.05	30.00	1.00
CH48	5240	12.76	0.22	12.98	30.00	1.00

Test Mode: UNII-1/TX N20 Mode _Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	16.19	30.00	1.00
CH40	5200	16.02	30.00	1.00
CH48	5240	15.95	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	13.20	0.57	13.77	30.00	1.00
CH46	5230	12.71	0.57	13.28	30.00	1.00

Test Mode: UNII-1/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	13.37	0.57	13.94	30.00	1.00
CH46	5230	12.80	0.57	13.37	30.00	1.00

Test Mode: UNII-1/TX N40 Mode _Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	16.87	30.00	1.00
CH46	5230	16.34	30.00	1.00

Test Mode: UNII-2A/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	12.57	0.22	12.79	24.00	0.25
CH60	5300	12.43	0.22	12.65	24.00	0.25
CH64	5320	12.21	0.22	12.43	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	12.64	0.22	12.86	24.00	0.25
CH60	5300	12.51	0.22	12.73	24.00	0.25
CH64	5320	12.26	0.22	12.48	24.00	0.25

Test Mode: UNII-2A/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.84	24.00	0.25
CH60	5300	15.70	24.00	0.25
CH64	5320	15.47	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	12.43	0.57	13.00	24.00	0.25
CH62	5310	12.23	0.57	12.80	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	12.56	0.57	13.13	24.00	0.25
CH62	5310	12.33	0.57	12.90	24.00	0.25

Test Mode: UNII-2A/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	16.08	24.00	0.25
CH62	5310	15.86	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	12.65	0.22	12.87	24.00	0.25
CH116	5580	12.50	0.22	12.72	24.00	0.25
CH140	5700	13.01	0.22	13.23	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	12.84	0.22	13.06	24.00	0.25
CH116	5580	12.71	0.22	12.93	24.00	0.25
CH140	5700	13.48	0.22	13.70	24.00	0.25

Test Mode: UNII-2C/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.98	24.00	0.25
CH116	5580	15.84	24.00	0.25
CH140	5700	16.48	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	12.64	0.57	13.21	24.00	0.25
CH110	5550	12.71	0.57	13.28	24.00	0.25
CH134	5670	13.01	0.57	13.58	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	12.88	0.57	13.45	24.00	0.25
CH110	5550	12.91	0.57	13.48	24.00	0.25
CH134	5670	13.58	0.57	14.15	24.00	0.25

Test Mode: UNII-2C/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	16.34	24.00	0.25
CH110	5550	16.39	24.00	0.25
CH134	5670	16.88	24.00	0.25

Test Mode: UNII-3/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	12.95	0.22	13.17	30.00	1.00
CH157	5785	12.90	0.22	13.12	30.00	1.00
CH165	5825	12.89	0.22	13.11	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	13.26	0.22	13.48	30.00	1.00
CH157	5785	13.36	0.22	13.58	30.00	1.00
CH165	5825	13.15	0.22	13.37	30.00	1.00

Test Mode: UNII-3/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	16.34	30.00	1.00
CH157	5785	16.37	30.00	1.00
CH165	5825	16.25	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	12.96	0.57	13.53	30.00	1.00
CH159	5795	12.85	0.57	13.42	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	13.33	0.57	13.90	30.00	1.00
CH159	5795	13.22	0.57	13.79	30.00	1.00

Test Mode: UNII-3/ TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	16.73	30.00	1.00
CH159	5795	16.62	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	12.75	0.00	12.75	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	12.90	0.00	12.90	30.00	1.00

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	15.84	30.00	1.00

Test Mode: UNII-2A/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	12.46	0.00	12.46	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	12.56	0.00	12.56	24.00	0.25

Test Mode: UNII-2A/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	15.52	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	12.75	0.00	12.75	24.00	0.25
CH122	5610	12.67	0.00	12.67	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	13.01	0.00	13.01	24.00	0.25
CH122	5610	12.85	0.00	12.85	24.00	0.25

Test Mode: UNII-2C/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	15.89	24.00	0.25
CH122	5610	15.77	24.00	0.25

Test Mode: UNII-3/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	13.03	0.00	13.03	30.00	1.00

Test Mode: UNII-3/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	13.39	0.00	13.39	30.00	1.00


Test Mode: UNII-3/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	16.22	30.00	1.00

ATTACHMENT H - POWER SPECTRAL DENSITY


Test Mode: UNII-1/ TX A Mode_CH36/CH40/CH48

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	-0.76	0.21	-0.55	17.00
CH40	5200	-0.81	0.21	-0.60	17.00
CH48	5240	-0.89	0.21	-0.68	17.00

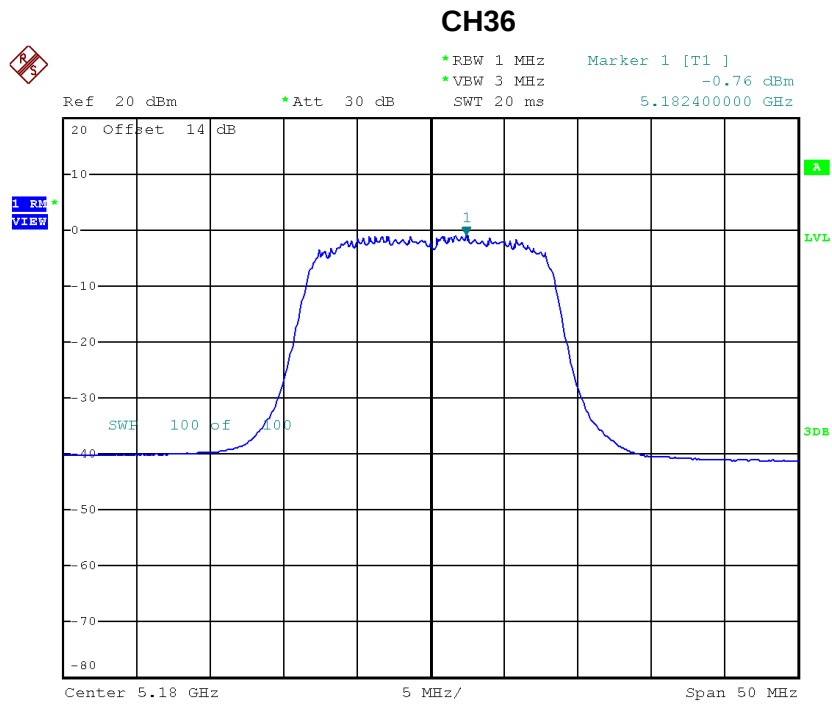


Date: 8.MAY.2017 15:24:25

CH40

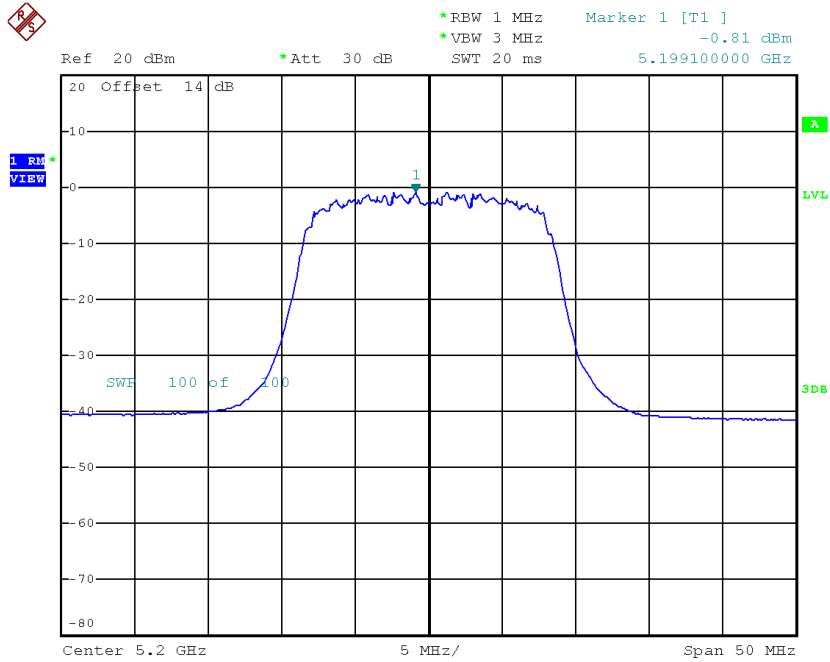

Date: 8.MAY.2017 15:26:32


CH48

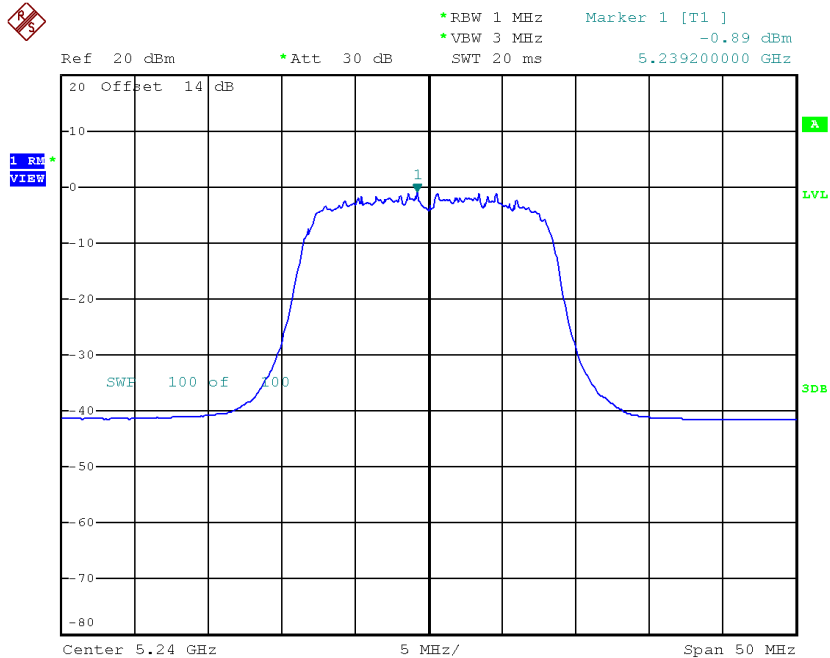

Date: 8.MAY.2017 15:29:42


Test Mode: UNII-2A/ TX A Mode_CH52/CH60/CH64

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-1.46	0.21	-1.25	11.00
CH60	5300	-1.01	0.21	-0.80	11.00
CH64	5320	-1.44	0.21	-1.23	11.00

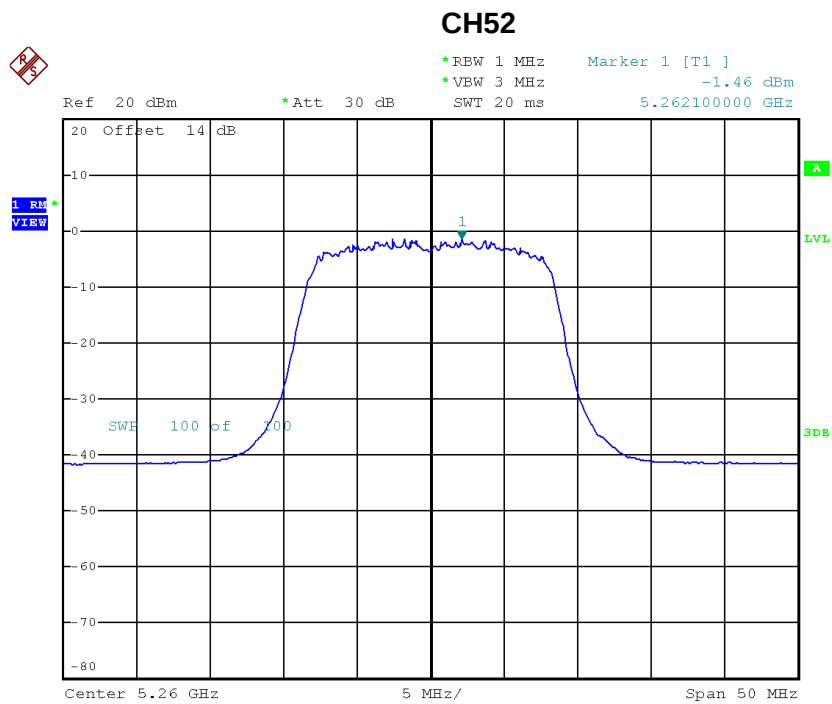


Date: 8.MAY.2017 15:30:46

CH60

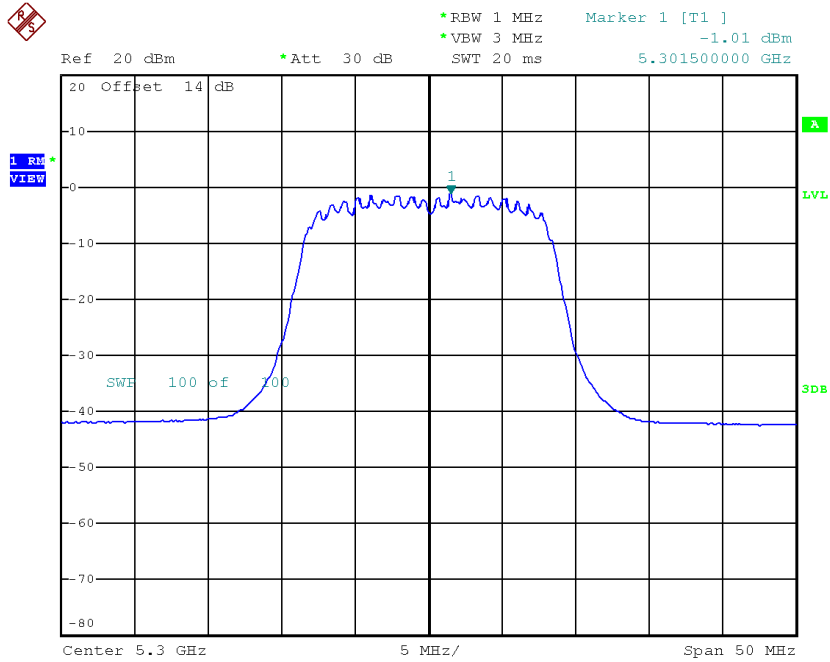

Date: 8.MAY.2017 15:32:48

CH64

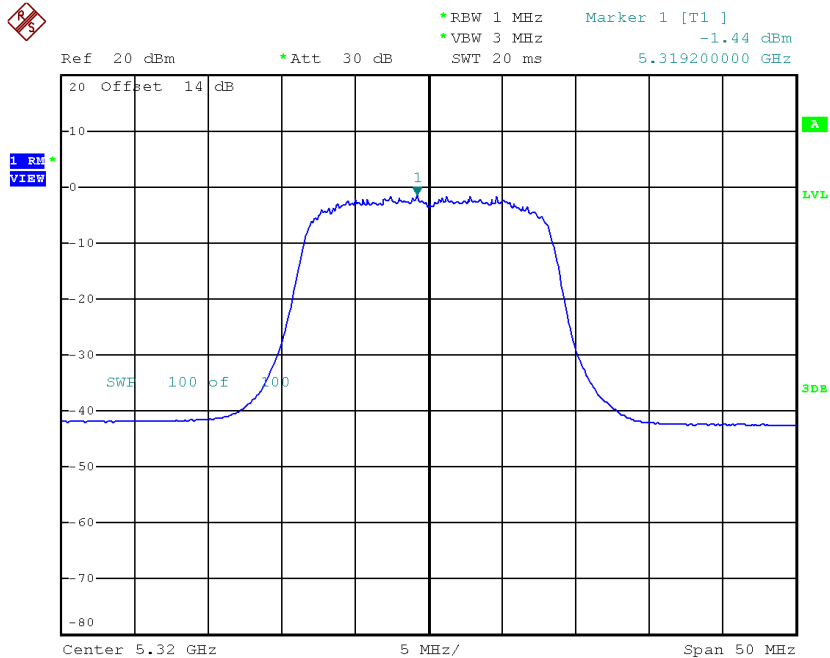


Date: 8.MAY.2017 15:33:46

Test Mode: UNII-2C/ TX A Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	-0.44	0.21	-0.23	11.00
CH116	5580	-0.25	0.21	-0.04	11.00
CH140	5700	-0.69	0.21	-0.48	11.00

CH100

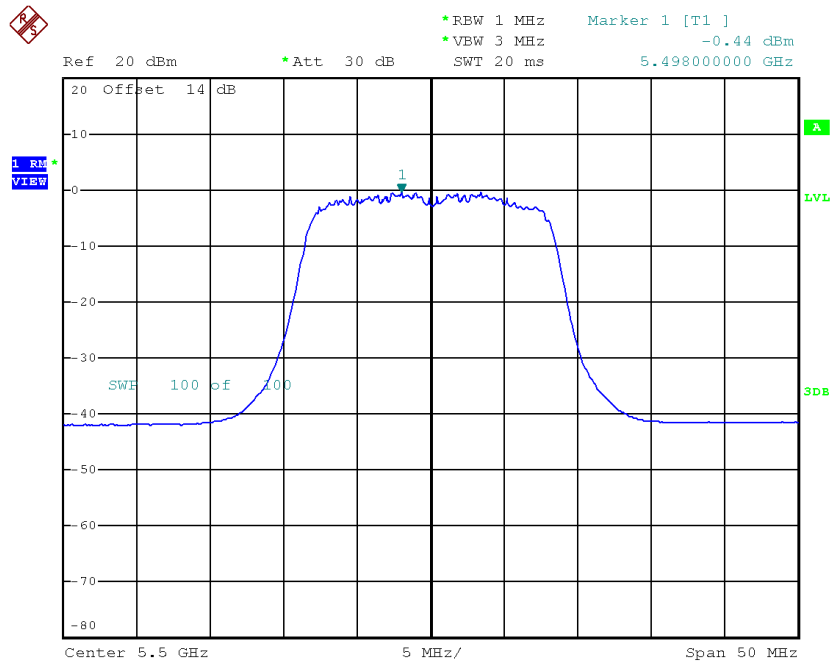


Date: 10.MAY.2017 15:16:52

CH116

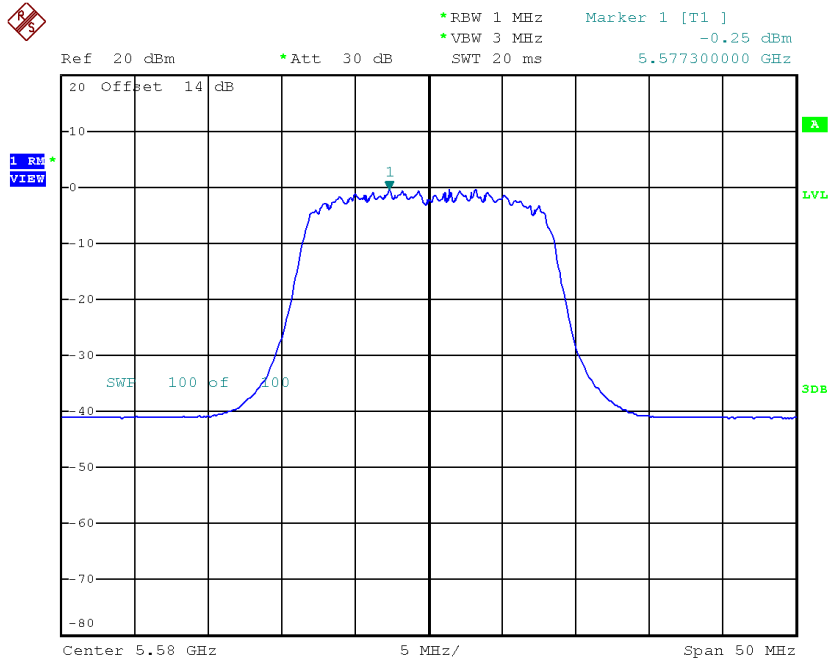

Date: 10.MAY.2017 15:18:02

CH140

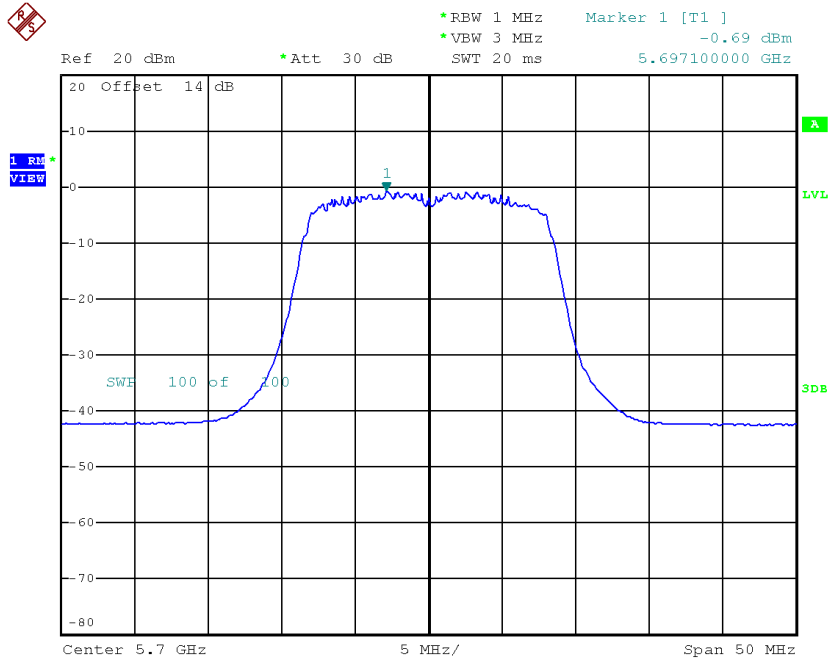


Date: 10.MAY.2017 15:20:05

Test Mode: UNII-3/TX A Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-3.81	0.21	-3.60	30.00
CH157	5785	-3.90	0.21	-3.69	30.00
CH165	5825	-3.62	0.21	-3.41	30.00

TX CH149

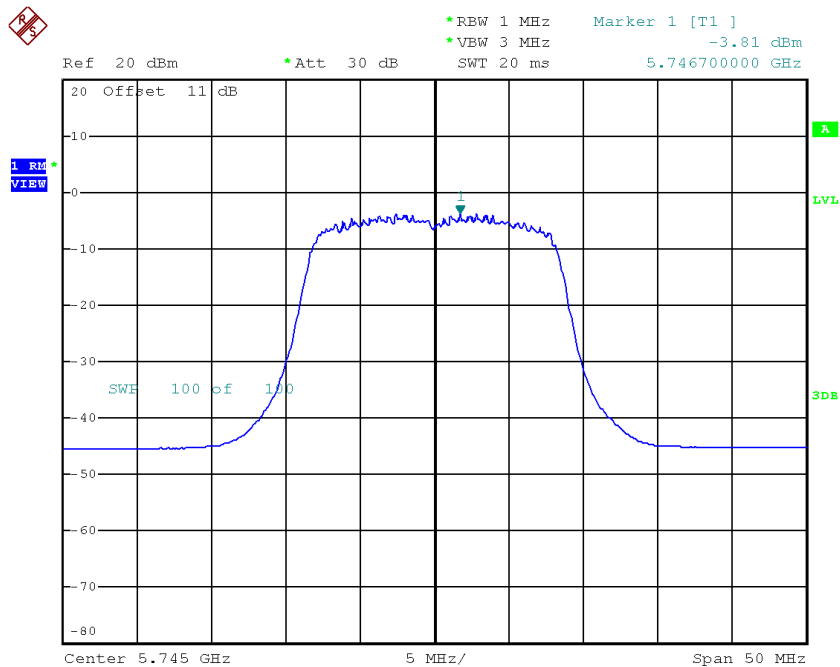


Date: 10.MAY.2017 15:20:41

TX CH157

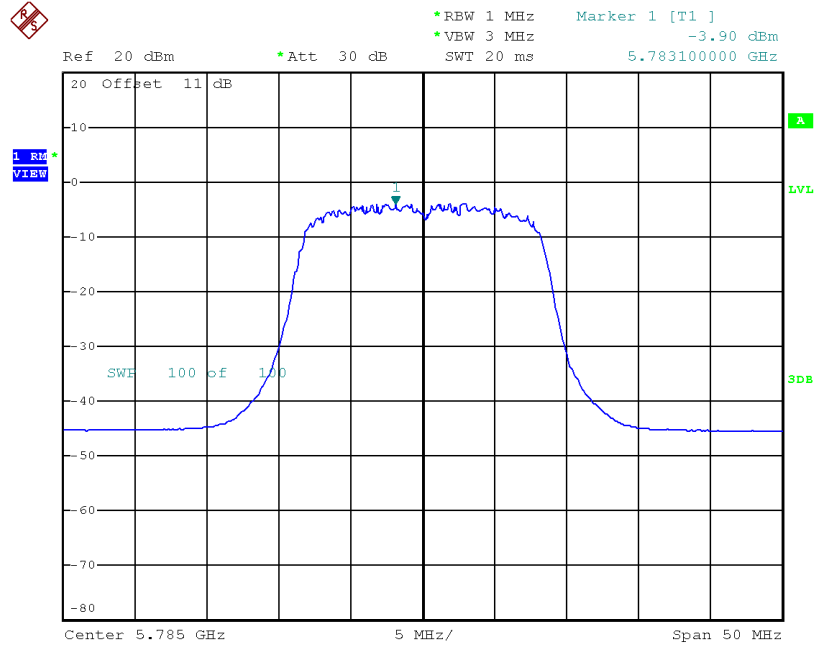

Date: 10.MAY.2017 15:23:14


TX CH165

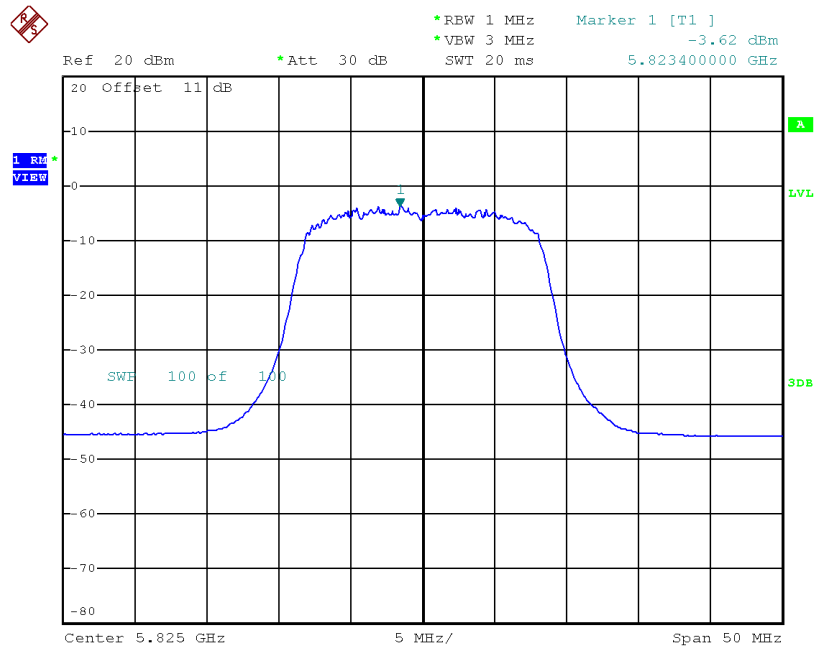

Date: 10.MAY.2017 15:24:32


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	-1.49	0.22	-1.27	17.00
CH40	5200	-1.56	0.22	-1.34	17.00
CH48	5240	-2.17	0.22	-1.95	17.00

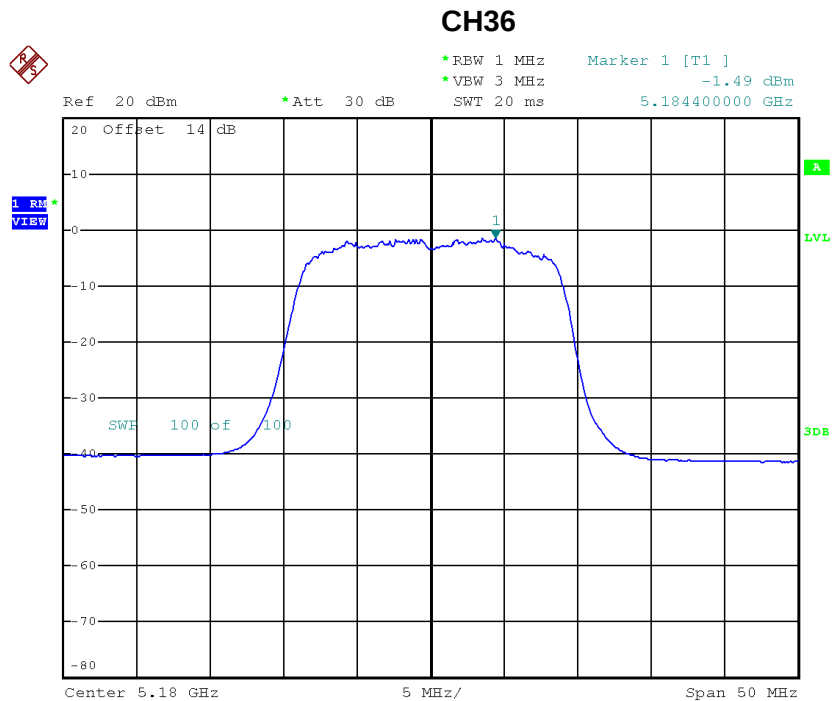


Date: 8.MAY.2017 15:54:02

CH40

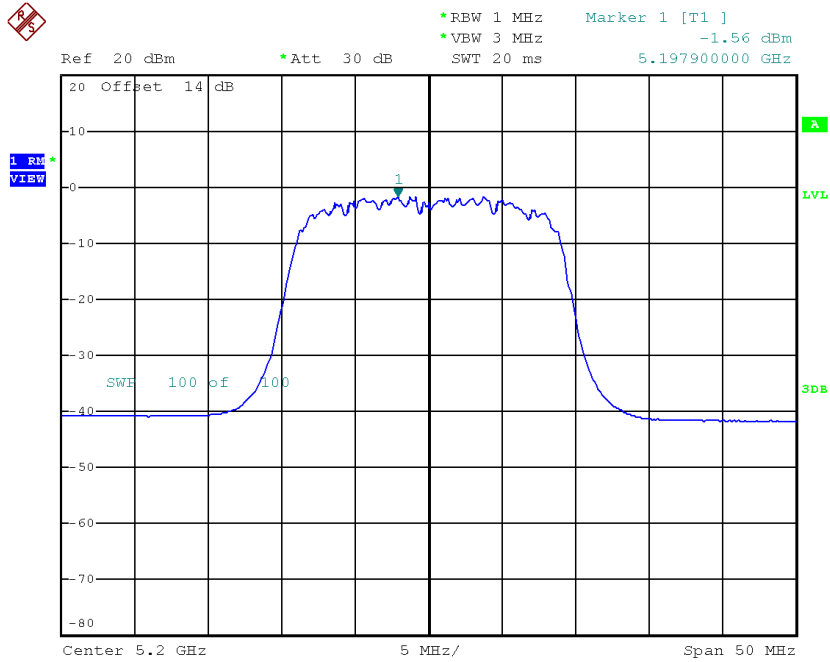

Date: 8.MAY.2017 15:55:40


CH48

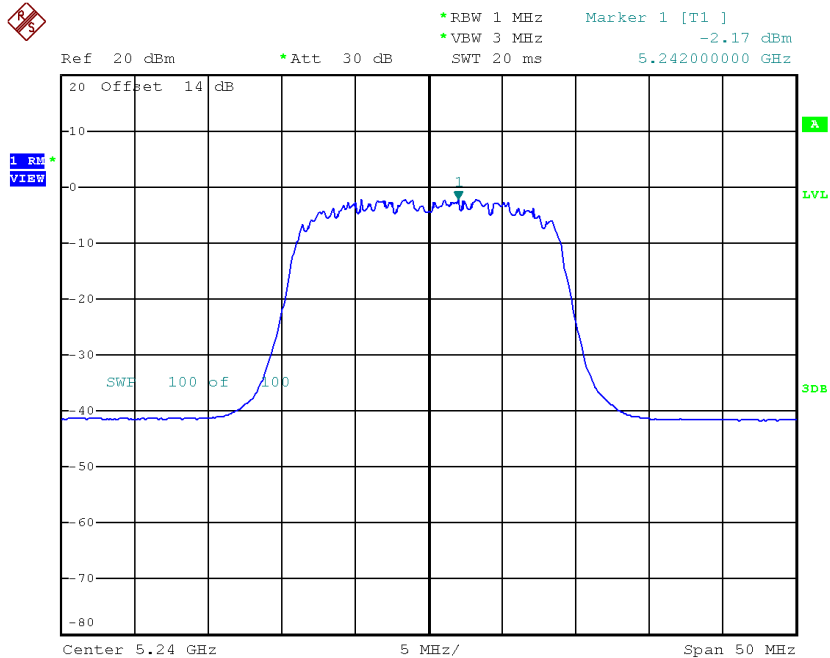

Date: 8.MAY.2017 16:00:59


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	-1.09	0.22	-0.87	17.00
CH40	5200	-1.41	0.22	-1.19	17.00
CH48	5240	-1.88	0.22	-1.66	17.00

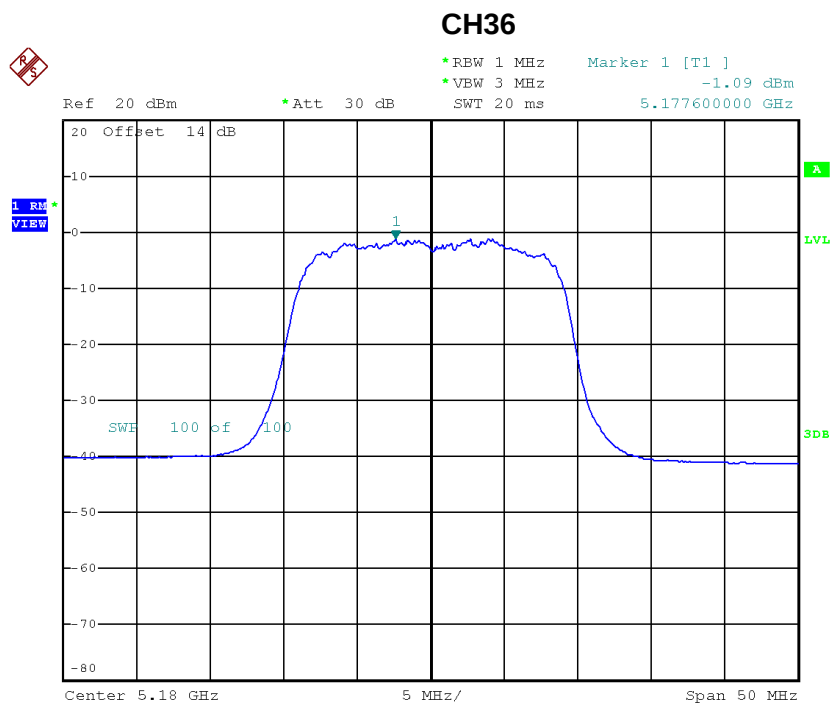


Date: 8.MAY.2017 15:42:23

CH40

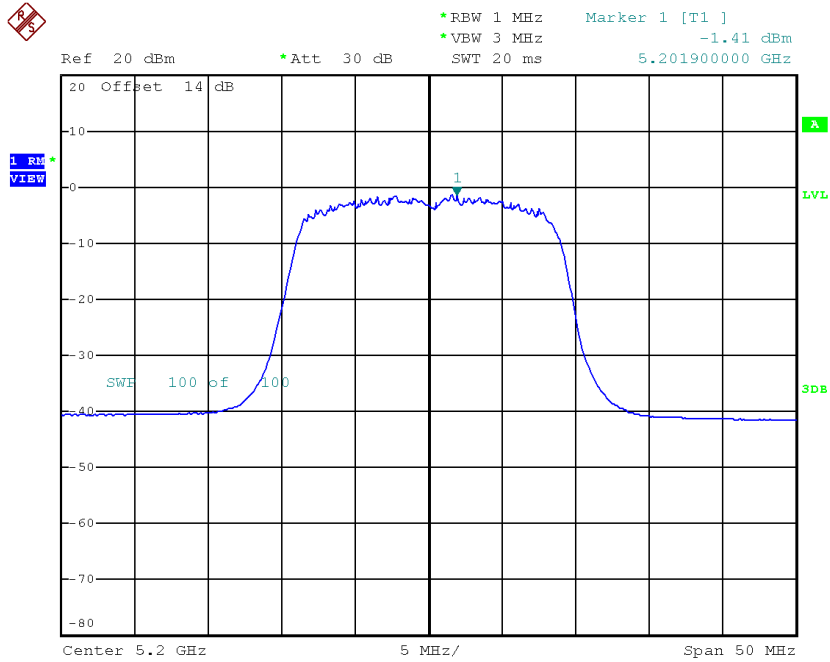

Date: 8.MAY.2017 15:44:28

CH48

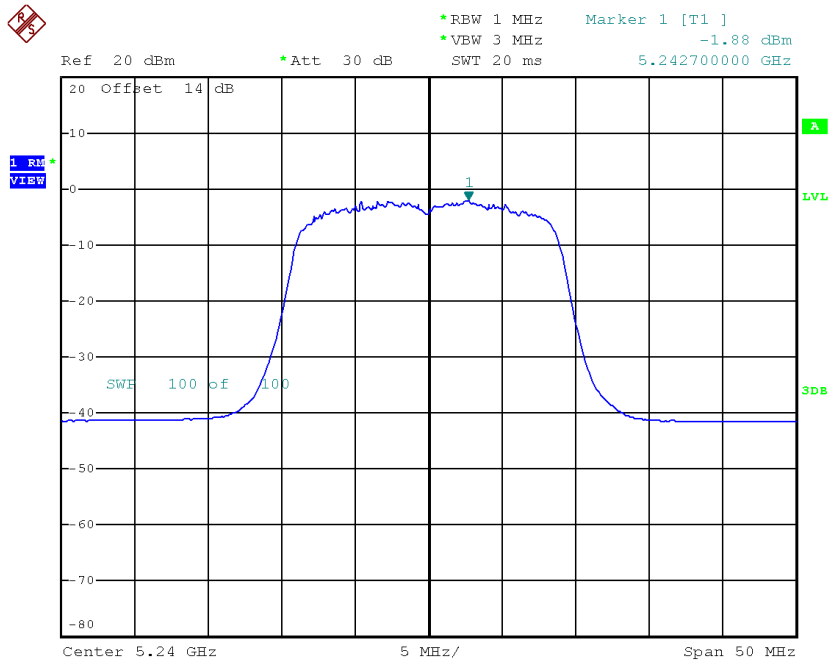

Date: 8.MAY.2017 15:45:50


Test Mode: UNII-1/TX N20 Mode_CH36/CH40/CH48_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH36	5180	1.94	17.00
CH40	5200	1.75	17.00
CH48	5240	1.21	17.00

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-4.54	0.57	-3.97	17.00
CH46	5230	-4.45	0.57	-3.88	17.00

CH38

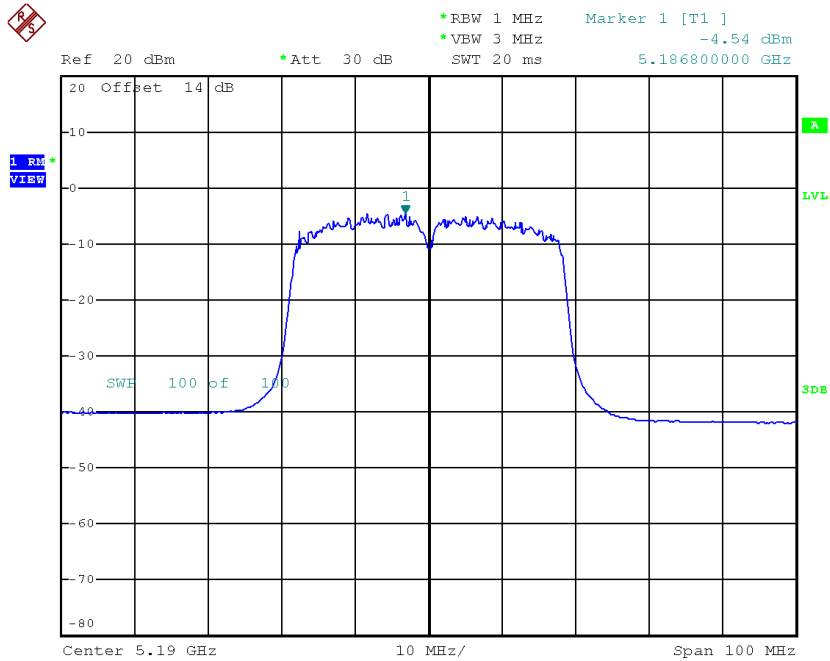

Date: 8.MAY.2017 16:18:47

CH46

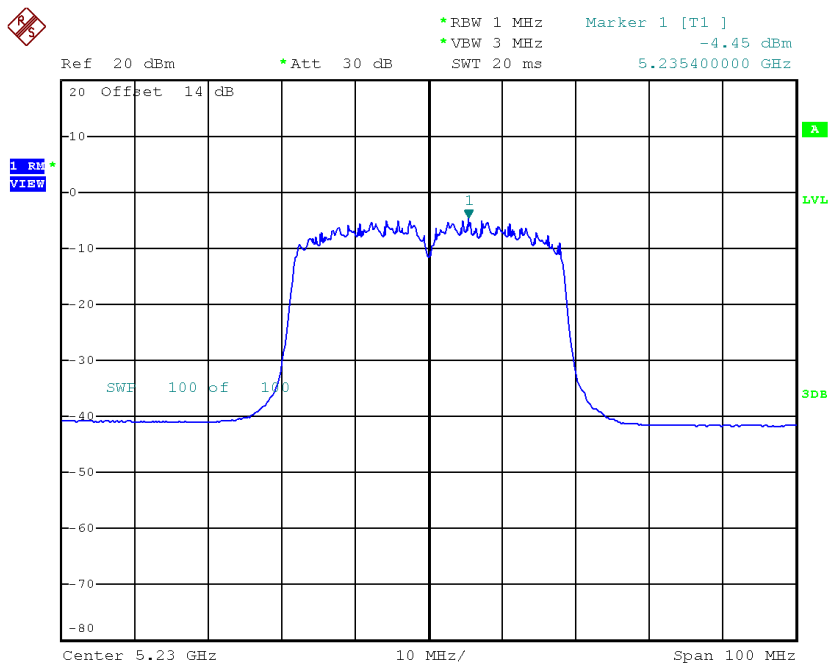


Date: 8.MAY.2017 16:21:53

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-4.55	0.57	-3.98	17.00
CH46	5230	-4.22	0.57	-3.65	17.00

CH38

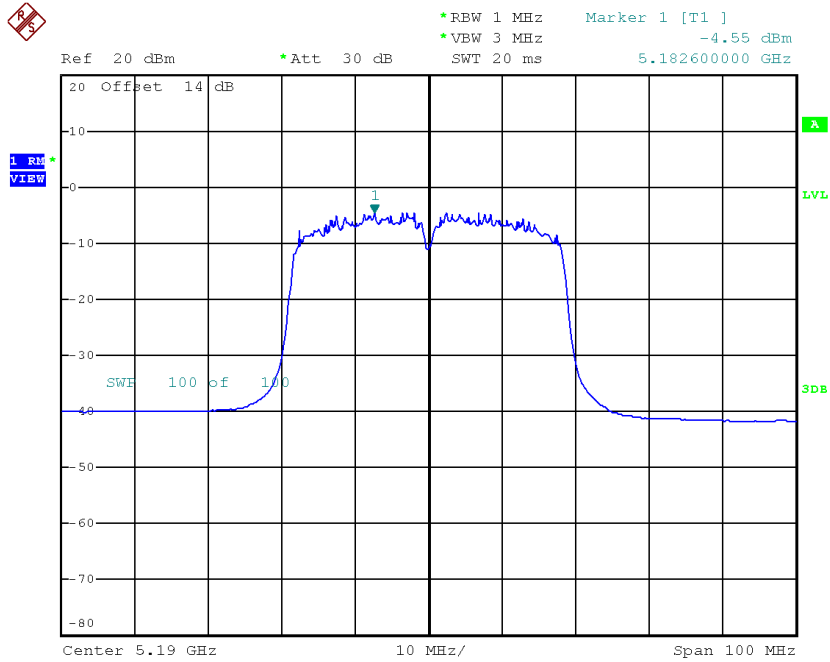

Date: 8.MAY.2017 16:30:38

CH46

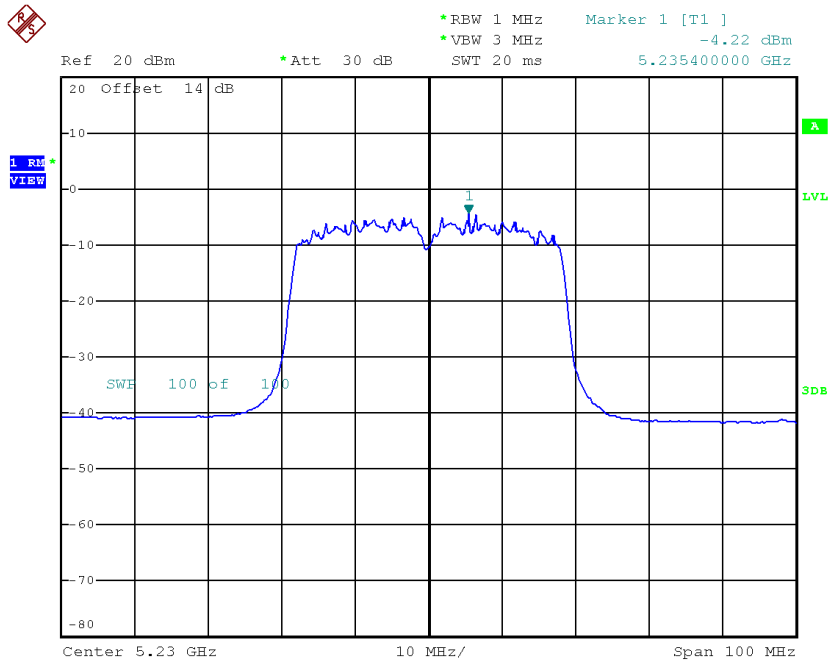


Date: 8.MAY.2017 16:32:10

Test Mode: UNII-1/TX N40 Mode_CH38/CH46_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH38	5190	-0.96	17.00
CH46	5230	-0.75	17.00


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-1.91	0.22	-1.69	11.00
CH60	5300	-1.92	0.22	-1.70	11.00
CH64	5320	-1.71	0.22	-1.49	11.00

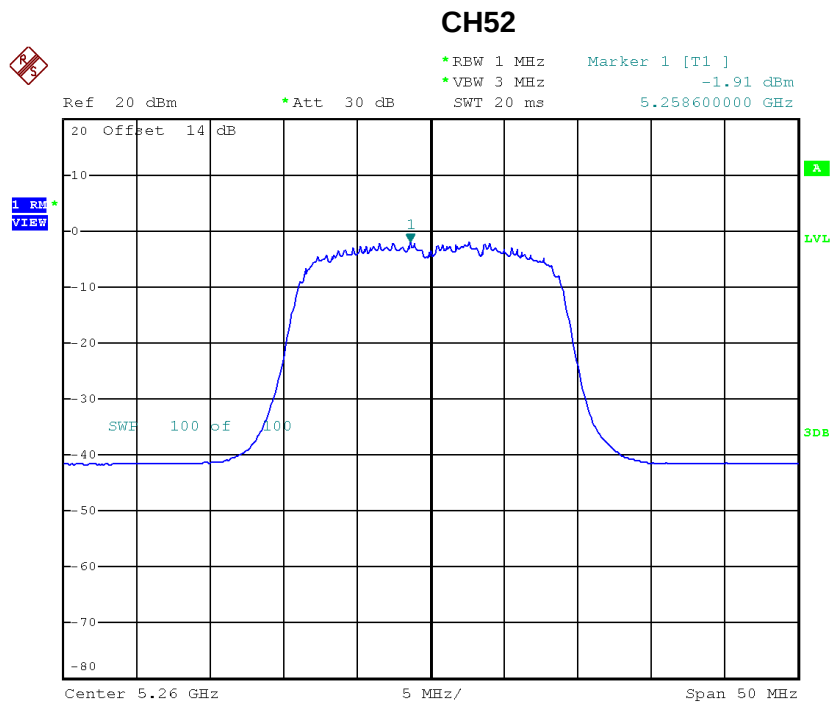


Date: 8.MAY.2017 16:05:47

CH60

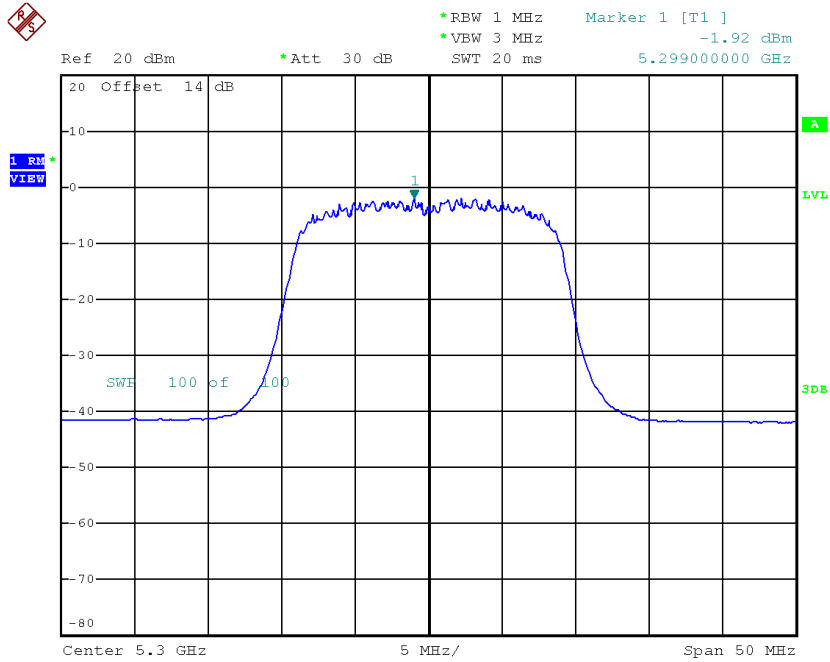

Date: 8.MAY.2017 16:06:46


CH64

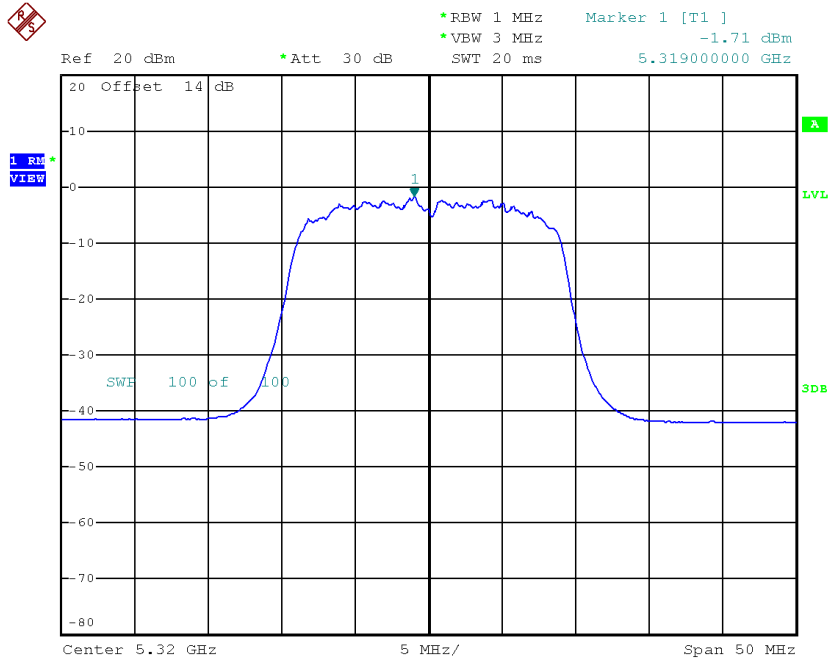

Date: 8.MAY.2017 16:13:09


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	-1.83	0.22	-1.61	11.00
CH60	5300	-1.82	0.22	-1.60	11.00
CH64	5320	-1.54	0.22	-1.32	11.00

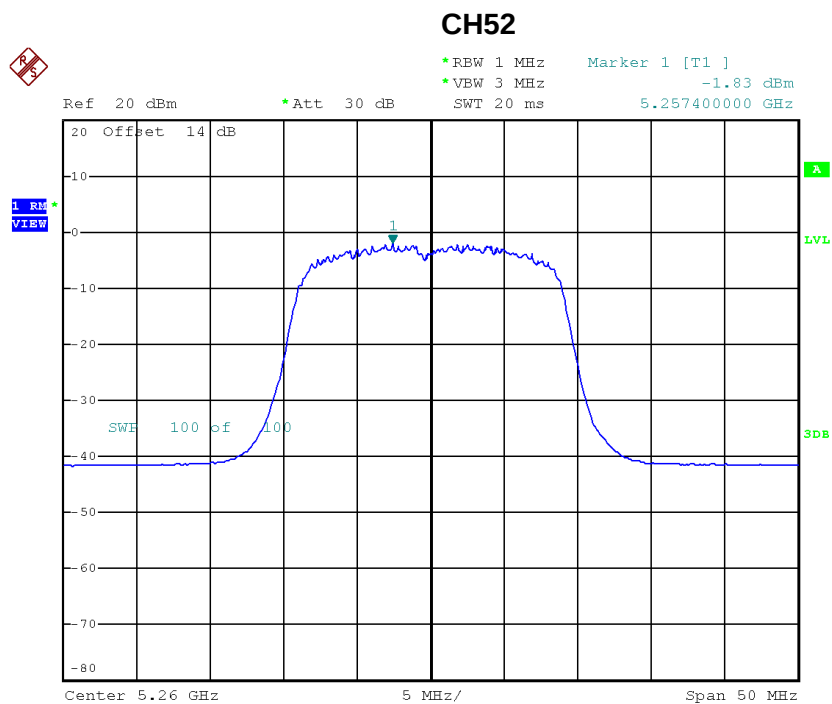


Date: 8.MAY.2017 15:47:39

CH60

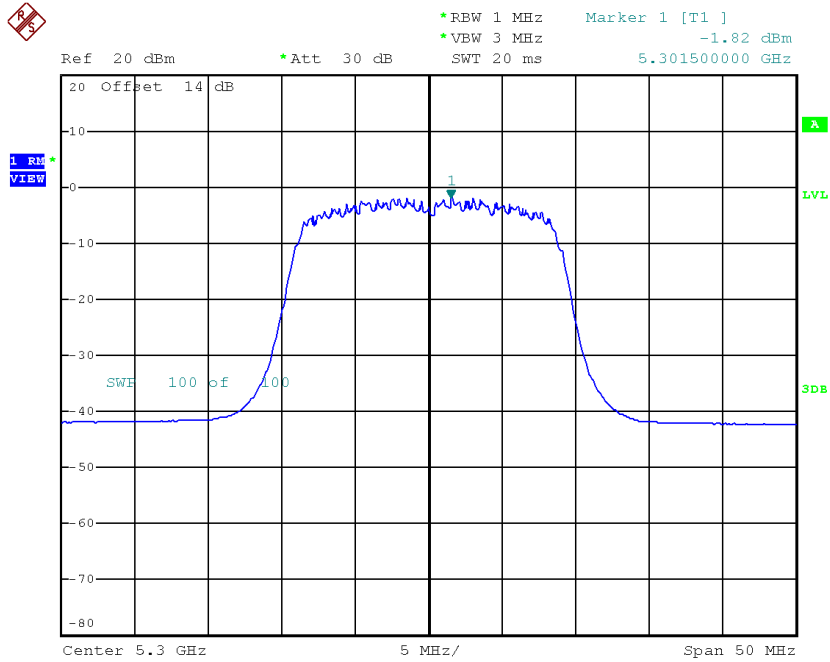

Date: 8.MAY.2017 15:48:53

CH64

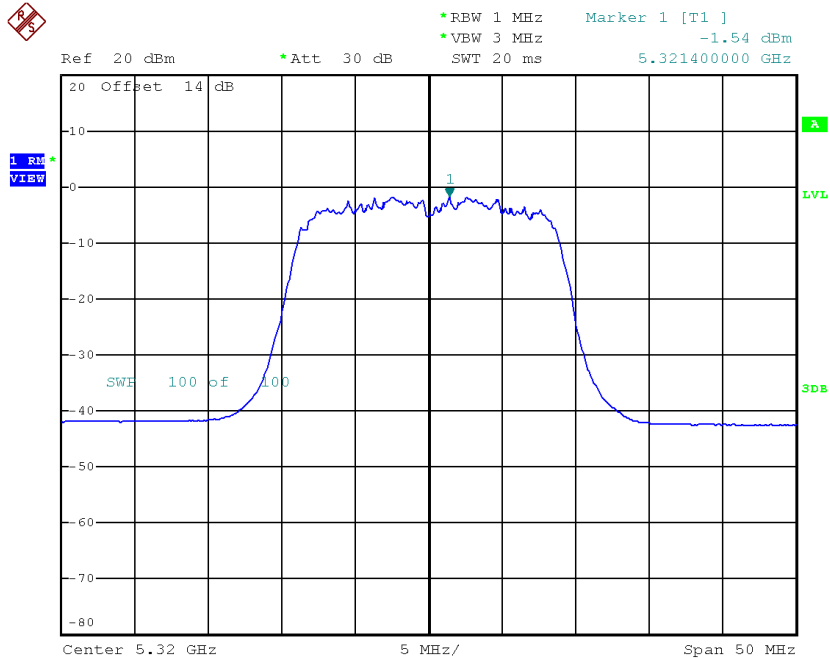

Date: 8.MAY.2017 15:50:40


Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH52	5260	1.36	11.00
CH60	5300	1.36	11.00
CH64	5320	1.61	11.00

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-5.32	0.57	-4.75	11.00
CH62	5310	-4.66	0.57	-4.09	11.00

CH54

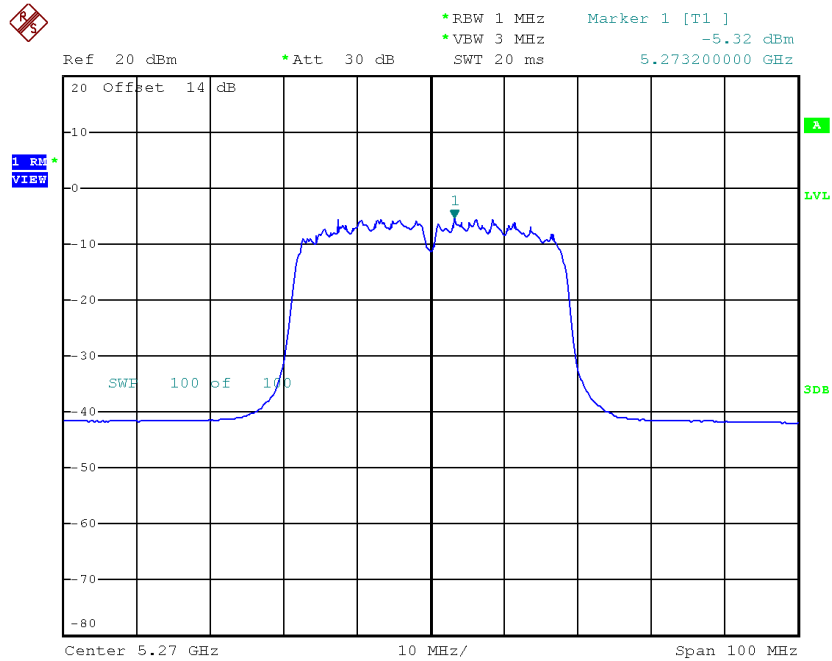

Date: 8.MAY.2017 16:23:07

CH62

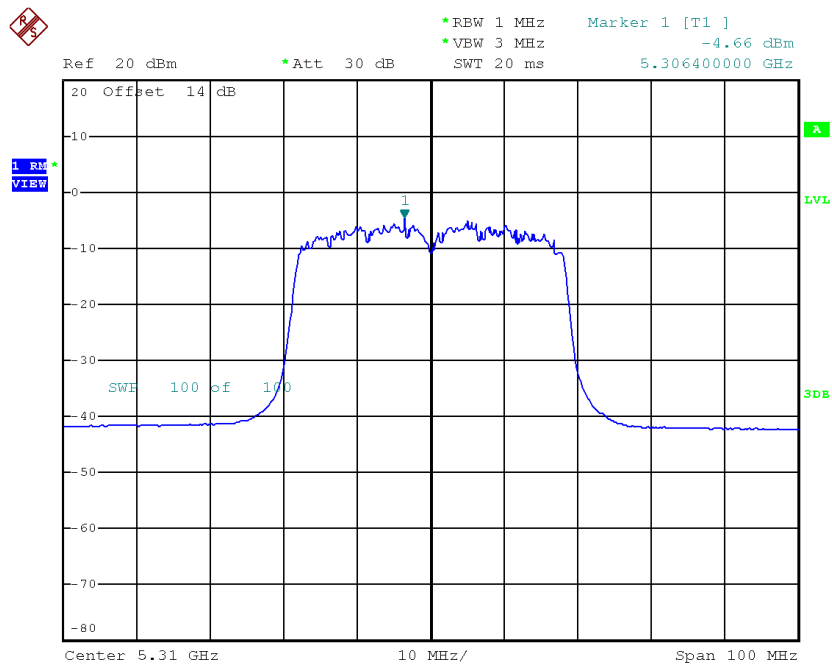


Date: 8.MAY.2017 16:24:51

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-4.80	0.57	-4.23	11.00
CH62	5310	-4.68	0.57	-4.11	11.00

CH54

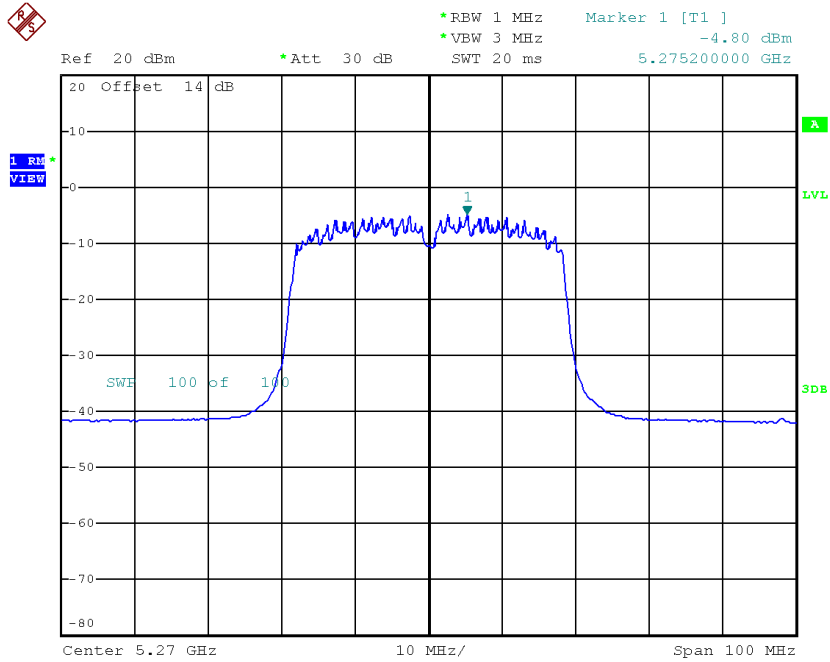

Date: 8.MAY.2017 16:34:16

CH62

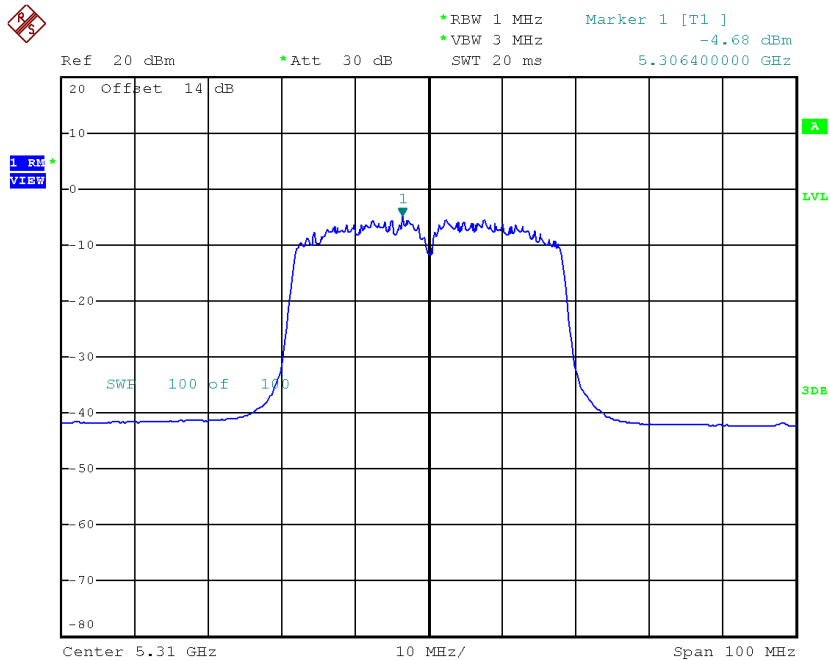

Date: 8.MAY.2017 16:36:23


Test Mode: UNII-2A/TX N40 Mode_CH54/CH62_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH54	5270	-1.47	11.00
CH62	5310	-1.09	11.00

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	-0.60	0.22	-0.38	11.00
CH116	5580	-0.75	0.22	-0.53	11.00
CH140	5700	-0.88	0.22	-0.66	11.00

CH100

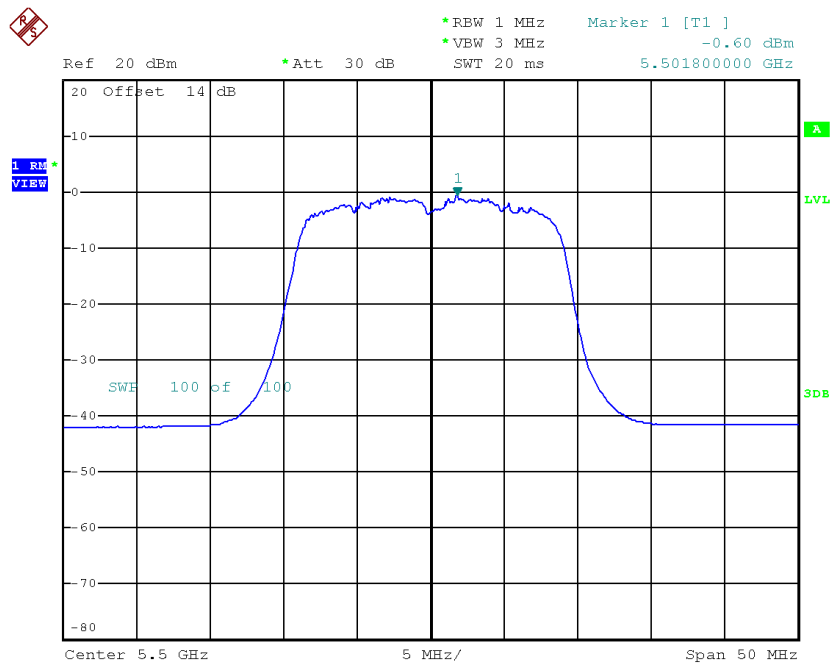


Date: 10.MAY.2017 16:06:18

CH116

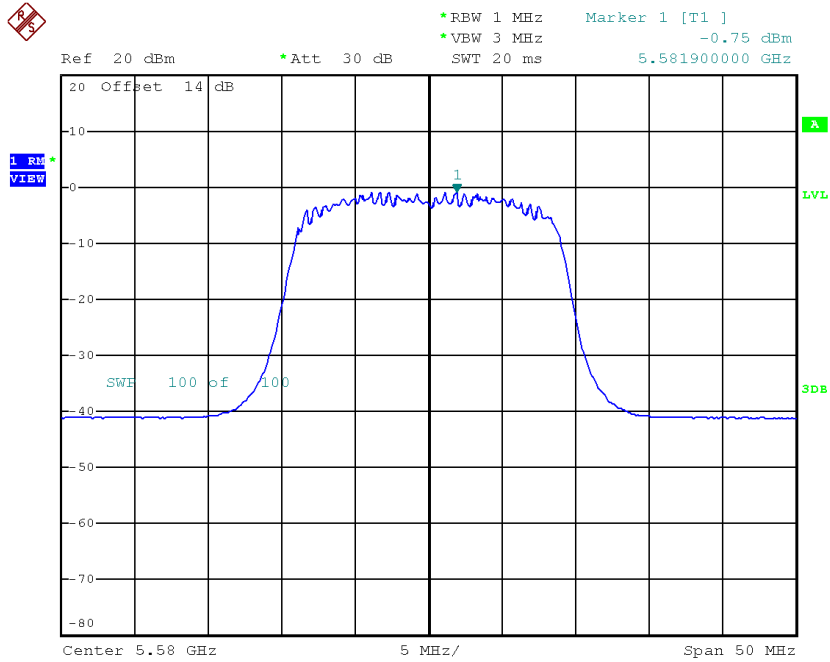

Date: 10.MAY.2017 16:08:48

CH140

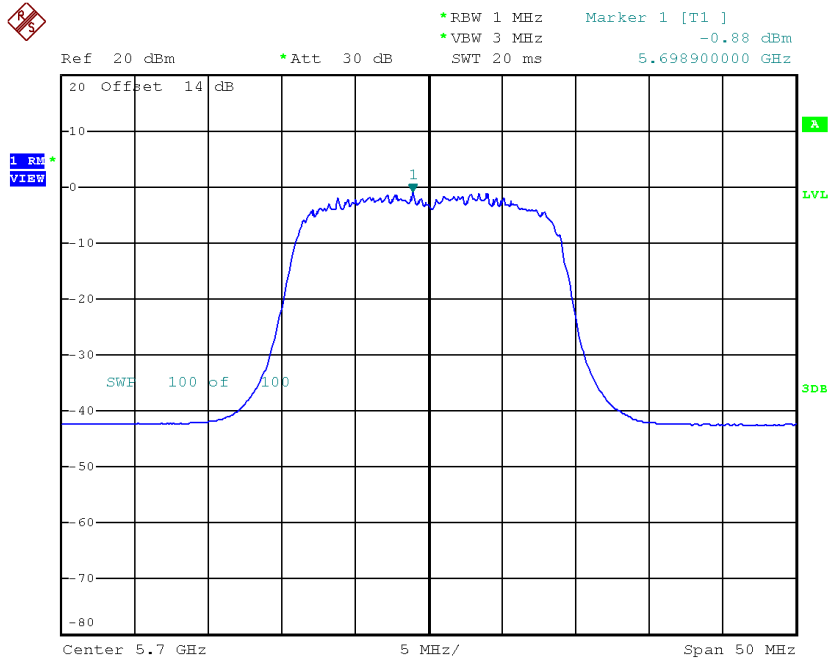


Date: 10.MAY.2017 16:13:04

Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	-0.43	0.22	-0.21	11.00
CH116	5580	-0.26	0.22	-0.04	11.00
CH140	5700	-0.55	0.22	-0.33	11.00

CH100

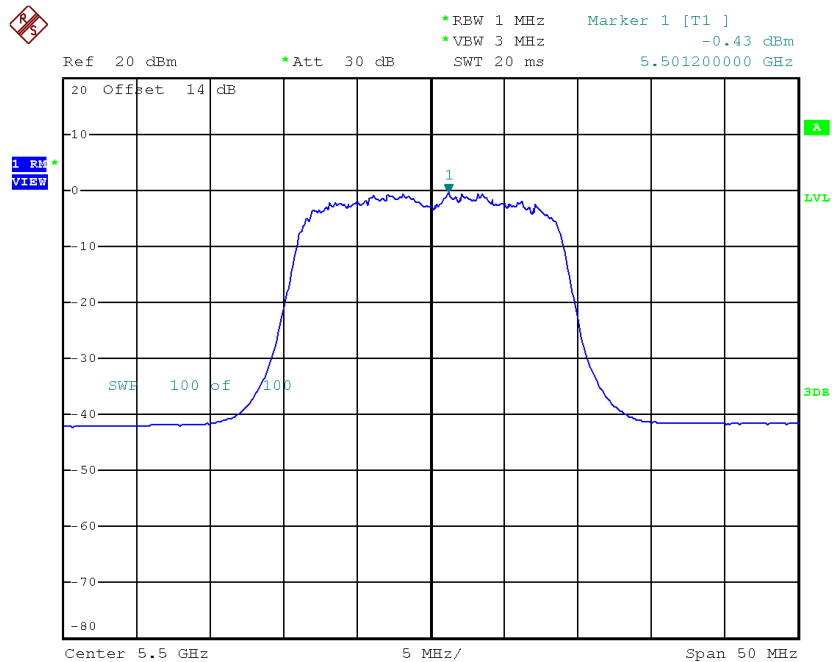


Date: 10.MAY.2017 16:07:00

CH116

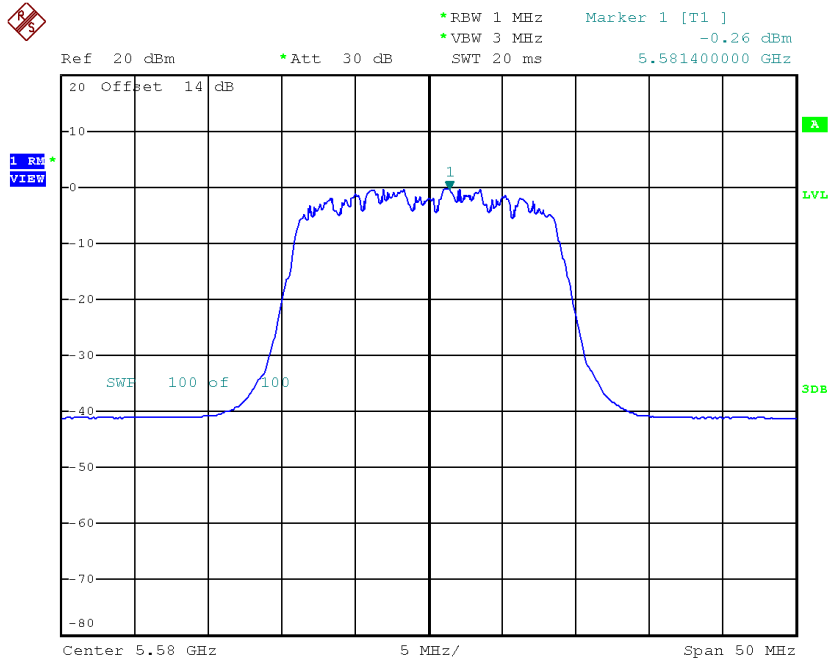

Date: 10.MAY.2017 16:08:06

CH140

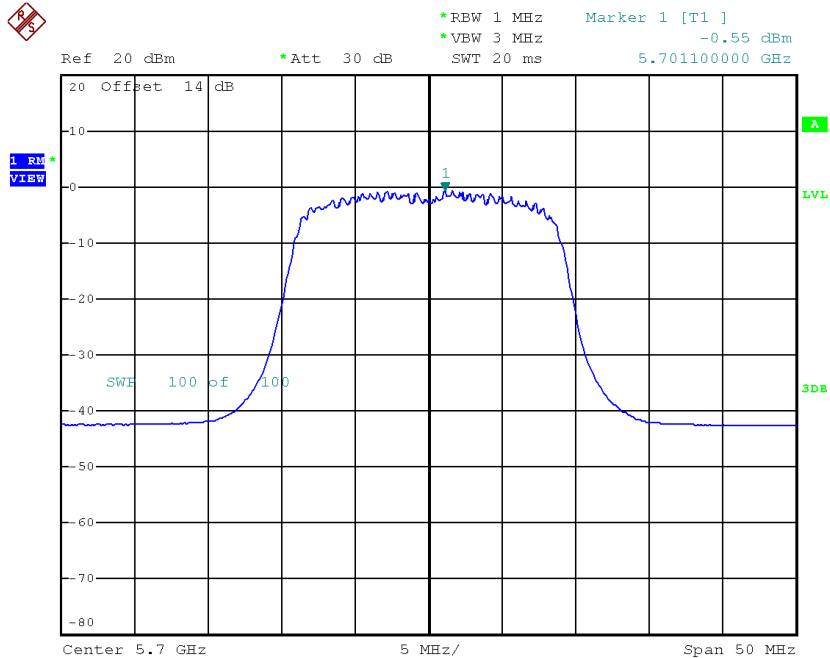

Date: 10.MAY.2017 16:13:43


Test Mode: UNII-2C/TX N20 Mode_CH100/CH116/CH140_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH100	5500	2.72	11.00
CH116	5580	2.73	11.00
CH140	5700	2.52	11.00

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-3.88	0.57	-3.31	11.00
CH110	5550	-3.99	0.57	-3.42	11.00
CH134	5670	-4.37	0.57	-3.80	11.00

CH102

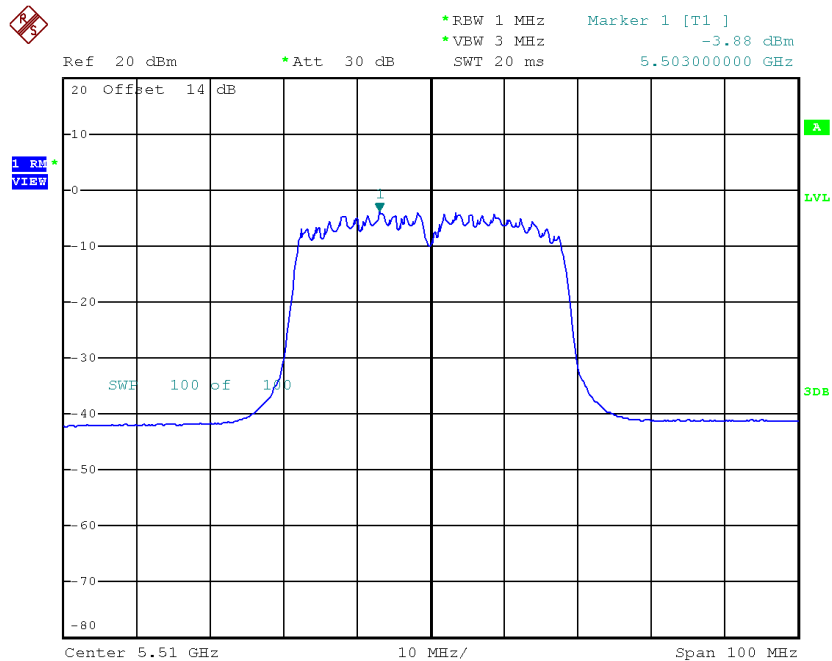


Date: 10.MAY.2017 15:51:57

CH110

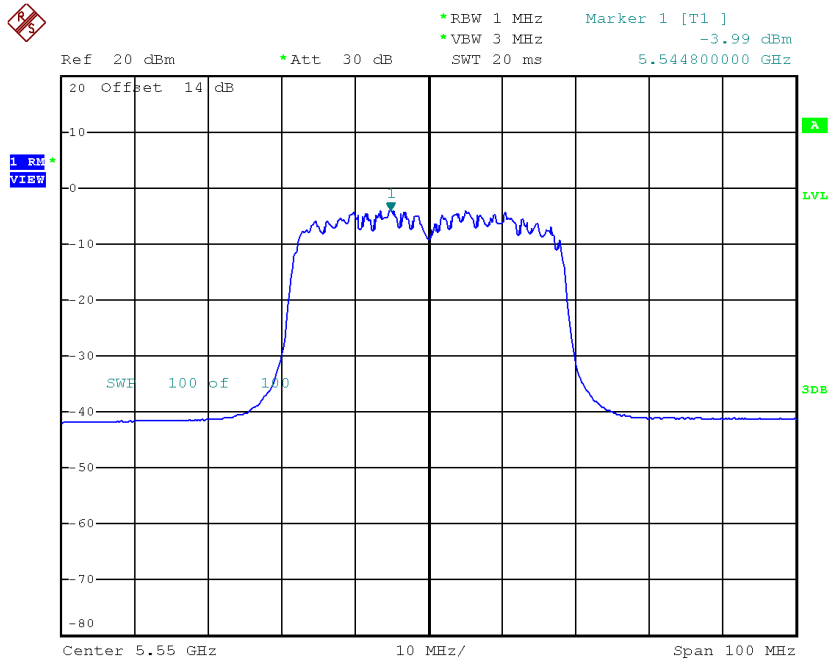

Date: 10.MAY.2017 15:55:52


CH134

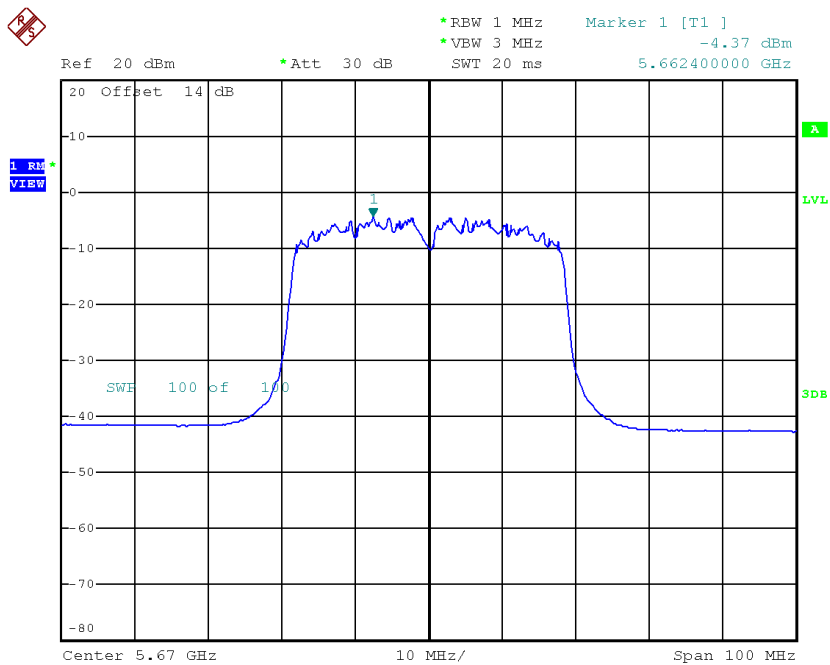

Date: 10.MAY.2017 15:57:17


Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-3.86	0.57	-3.29	11.00
CH110	5550	-3.64	0.57	-3.07	11.00
CH134	5670	-3.69	0.57	-3.12	11.00

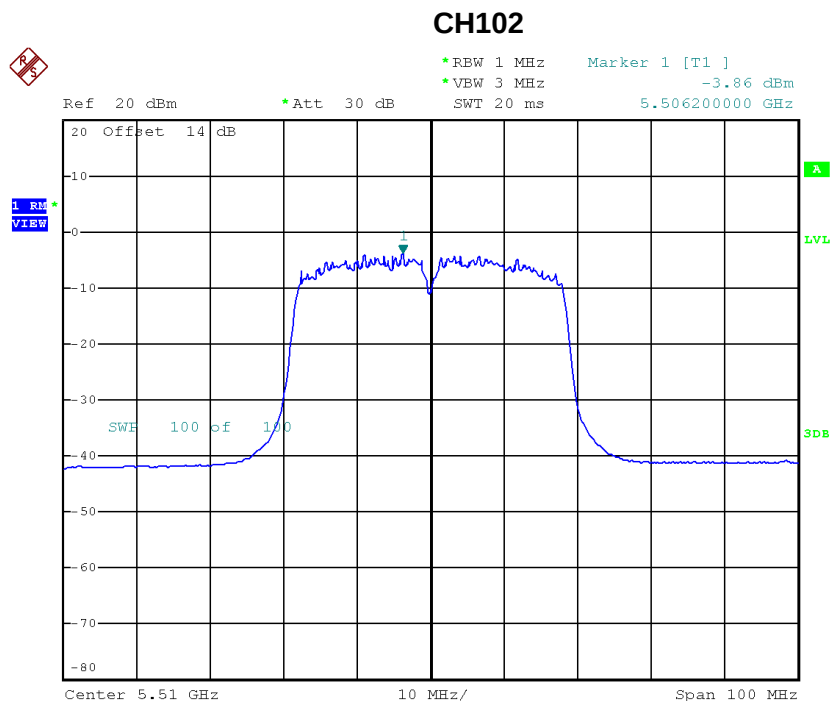


Date: 10.MAY.2017 15:52:59

CH110

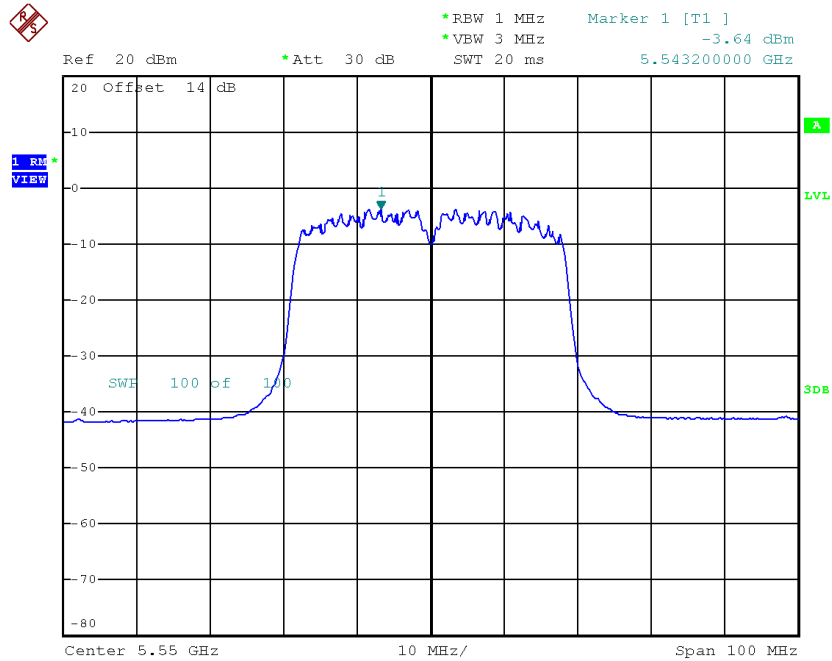

Date: 10.MAY.2017 15:54:50

CH134

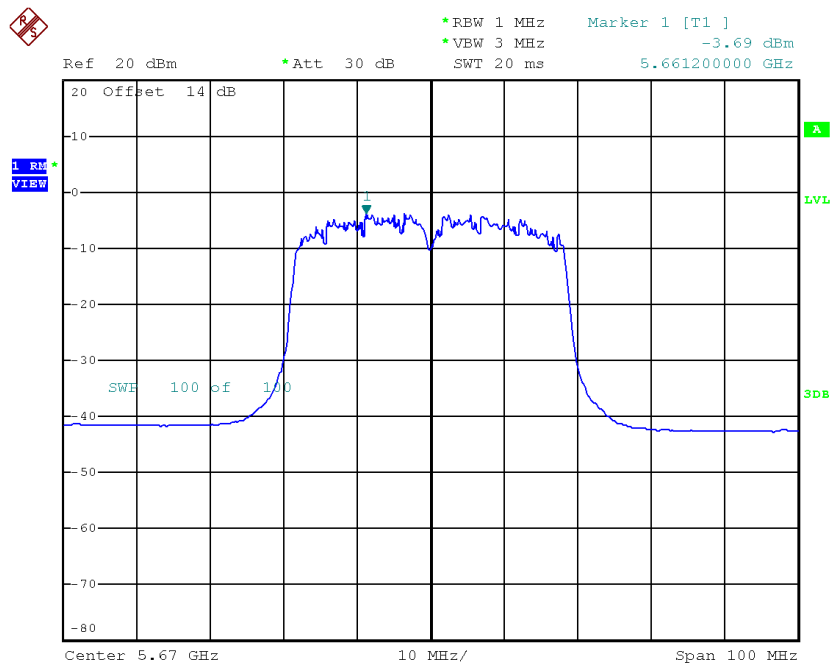

Date: 10.MAY.2017 15:58:16


Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH102	5510	-0.29	11.00
CH110	5550	-0.23	11.00
CH134	5670	-0.44	11.00

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-4.36	0.22	-4.14	30.00
CH157	5785	-4.10	0.22	-3.88	30.00
CH165	5825	-3.70	0.22	-3.48	30.00

TX CH149

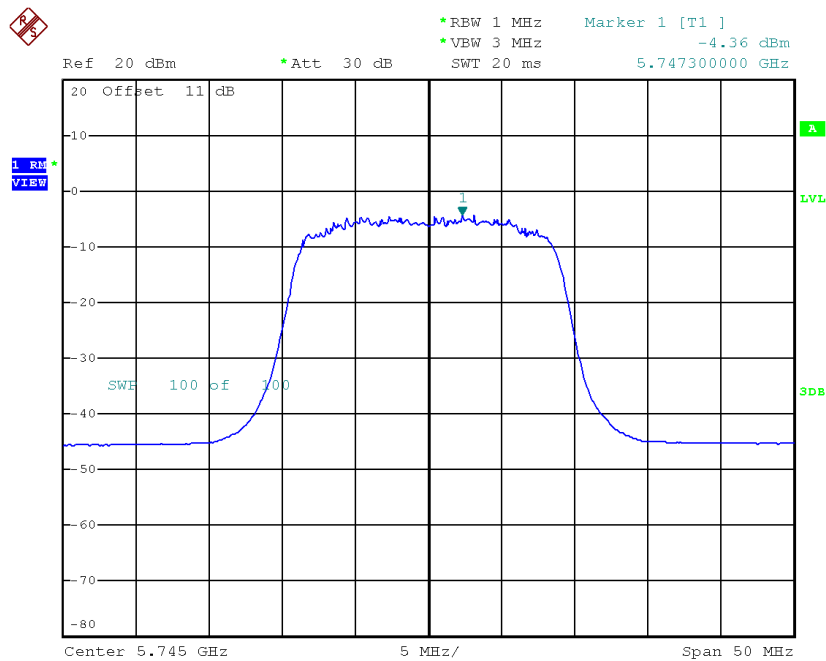


Date: 10.MAY.2017 16:16:16

TX CH157

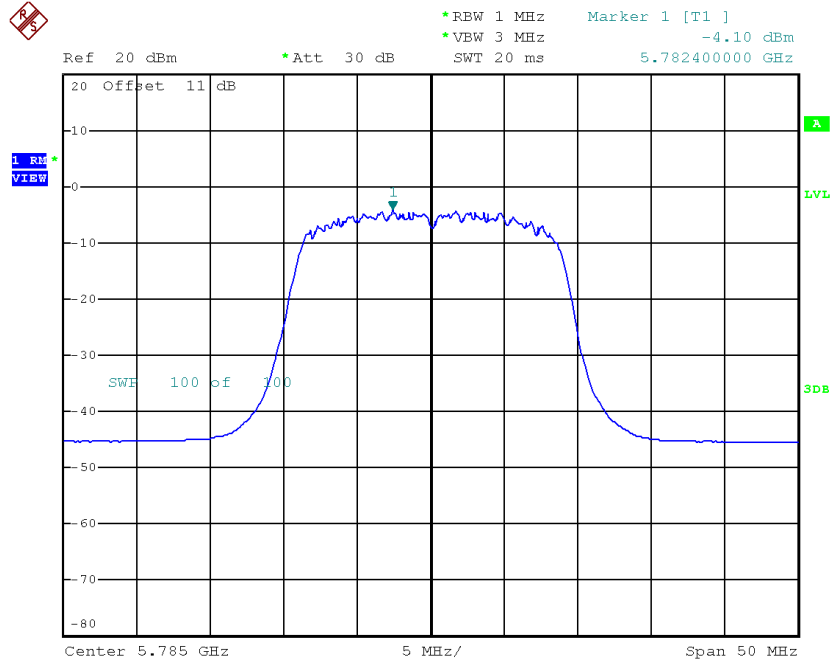

Date: 10.MAY.2017 16:18:25

TX CH165

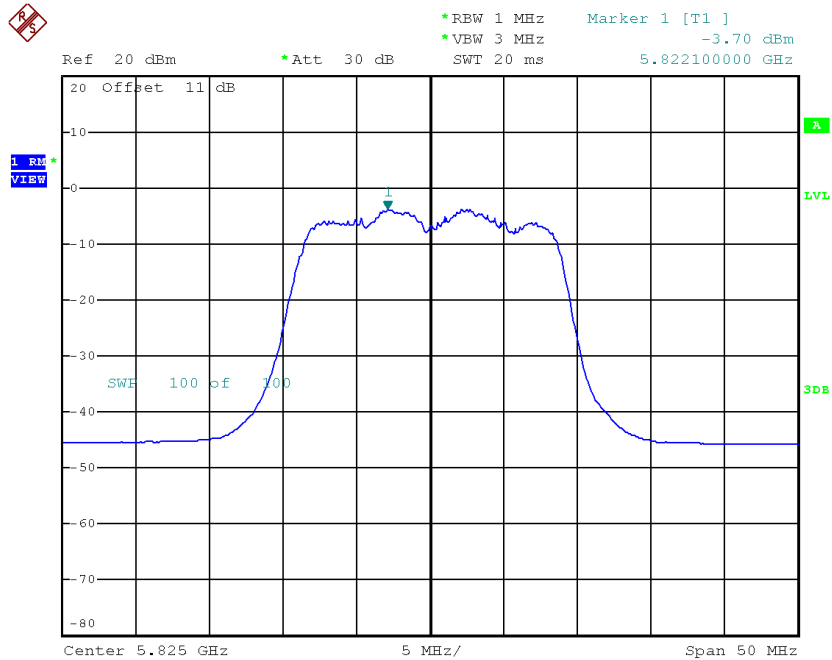


Date: 10.MAY.2017 16:21:12

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-3.84	0.22	-3.62	30.00
CH157	5785	-3.61	0.22	-3.39	30.00
CH165	5825	-3.80	0.22	-3.58	30.00

TX CH149

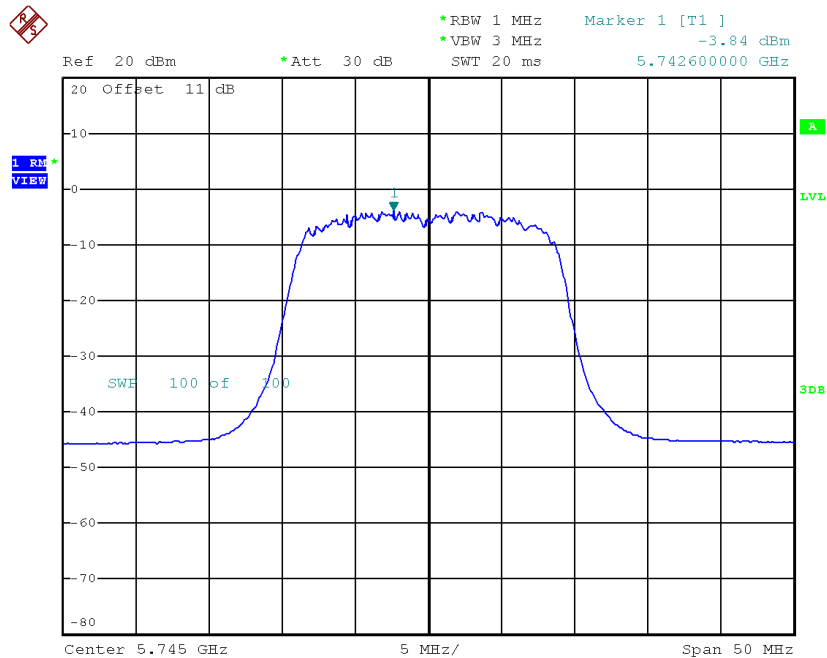


Date: 10.MAY.2017 16:15:27

TX CH157

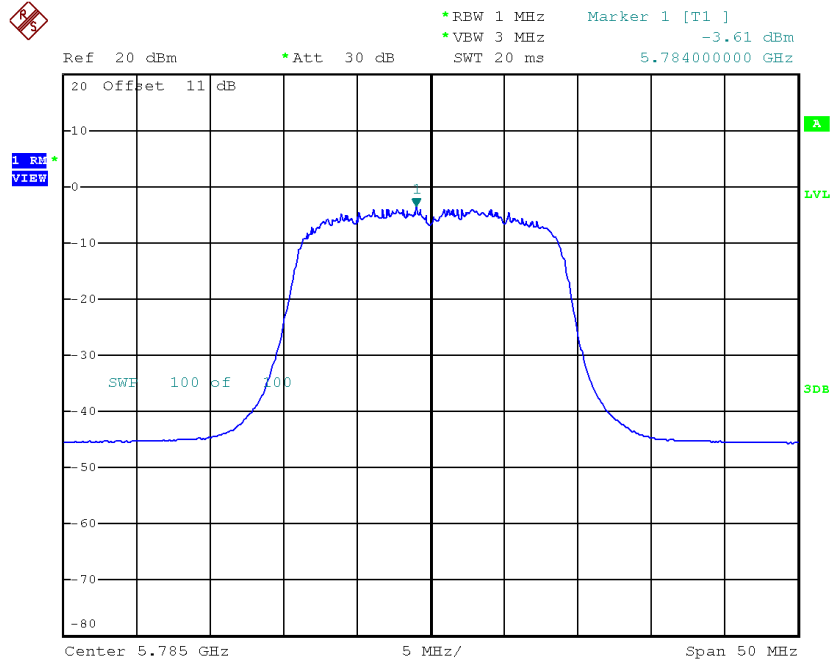

Date: 10.MAY.2017 16:19:13

TX CH165

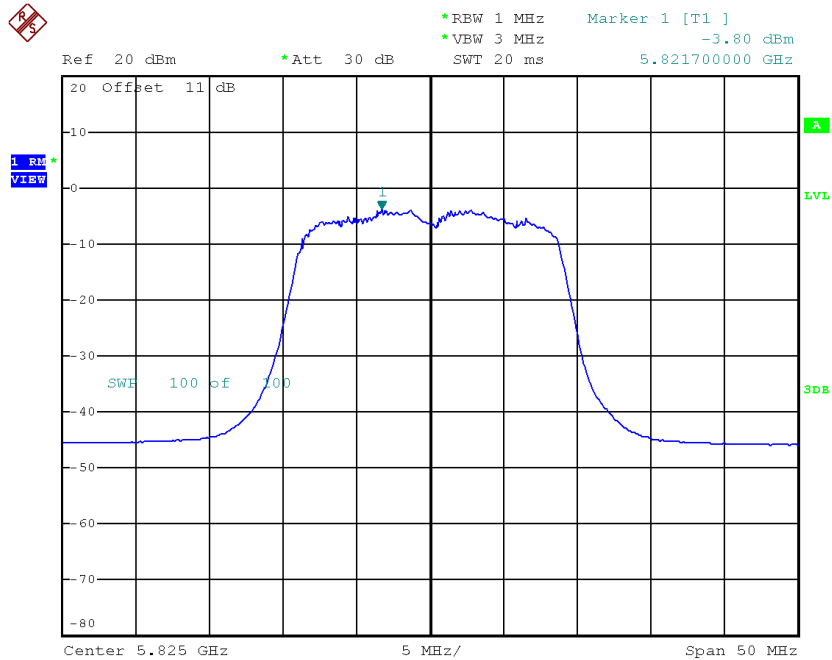

Date: 10.MAY.2017 16:20:23


Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH149	5745	-0.86	30.00
CH157	5785	-0.62	30.00
CH165	5825	-0.52	30.00

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-7.23	0.57	-6.66	30.00
CH159	5795	-7.54	0.57	-6.97	30.00

TX CH151

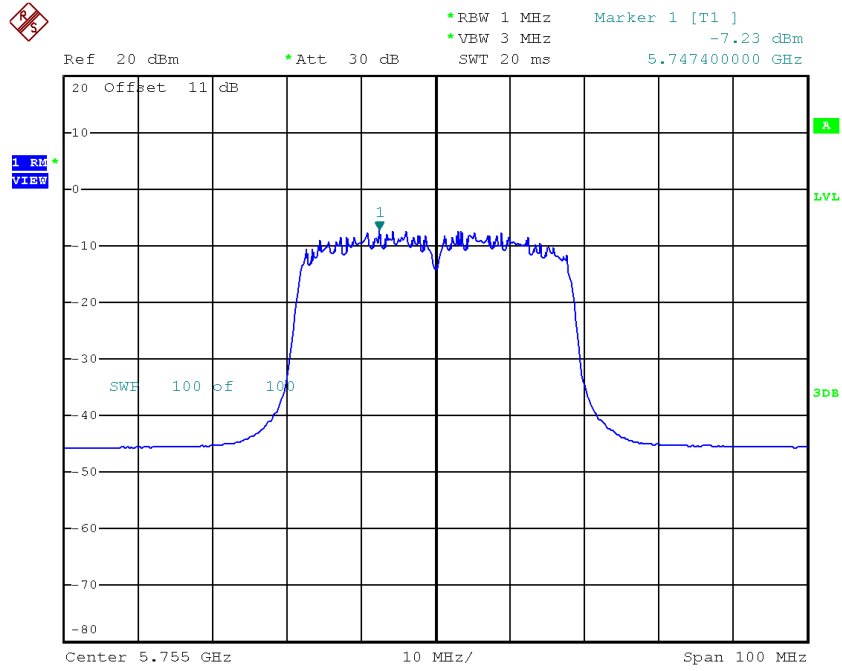

Date: 10.MAY.2017 16:00:56

TX CH159

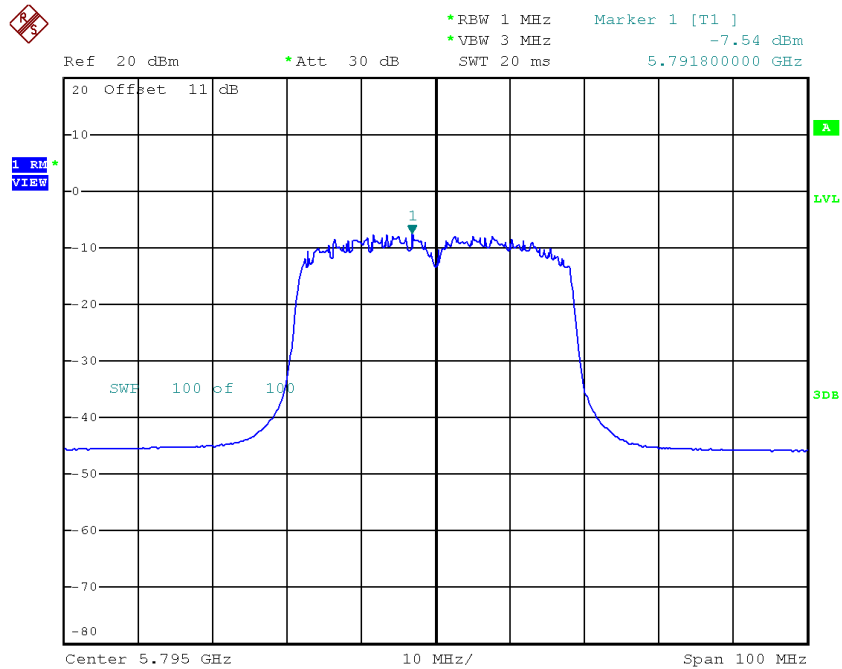


Date: 10.MAY.2017 16:02:16

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-6.56	0.57	-5.99	30.00
CH159	5795	-6.93	0.57	-6.36	30.00

TX CH151

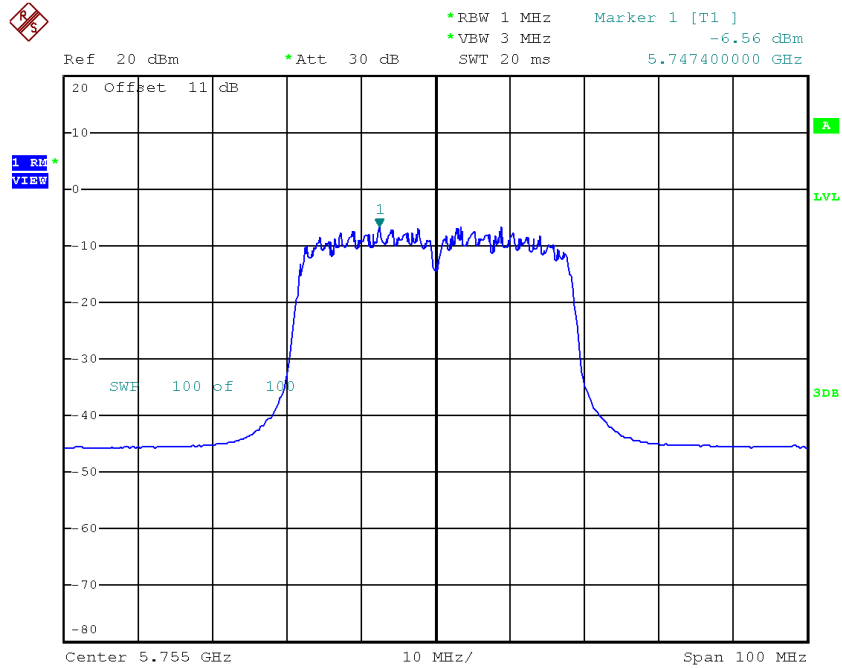

Date: 10.MAY.2017 15:59:51

TX CH159

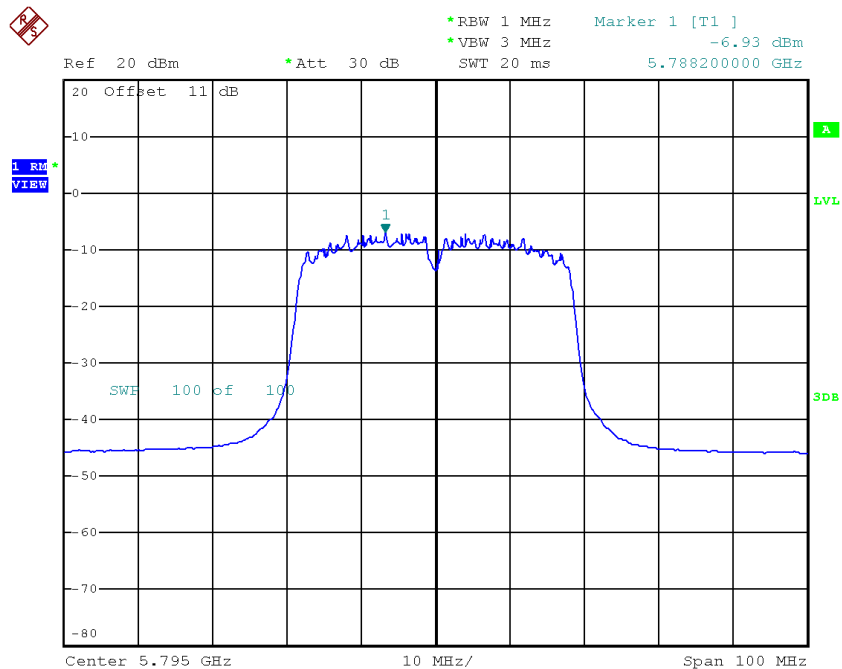


Date: 10.MAY.2017 16:03:19

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH151	5755	-3.30	30.00
CH159	5795	-3.64	30.00

Test Mode: UNII-1/TX AC80 Mode_CH42_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH42	5210	-9.38	0.00	-9.38	17.00

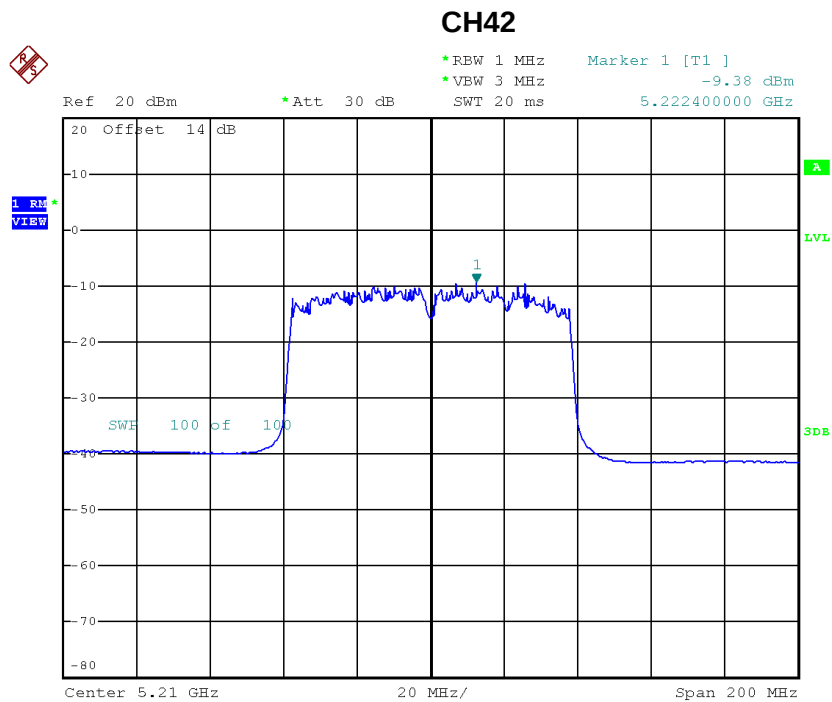

Date: 8.MAY.2017 16:27:26

Test Mode: UNII-1/TX AC80 Mode_CH42_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH42	5210	-9.22	0.00	-9.22	17.00

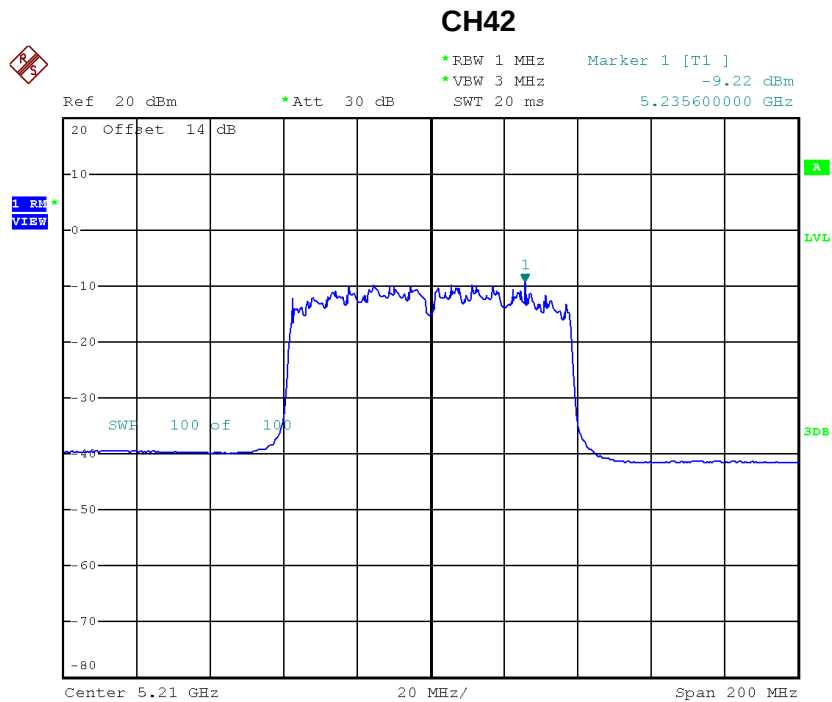


Date: 8.MAY.2017 16:39:51

Test Mode: UNII-1/TX AC80 Mode_CH42_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH42	5210	-6.29	17.00

Test Mode: UNII-2A/TX AC80 Mode_CH58_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	-9.94	0.00	-9.94	11.00

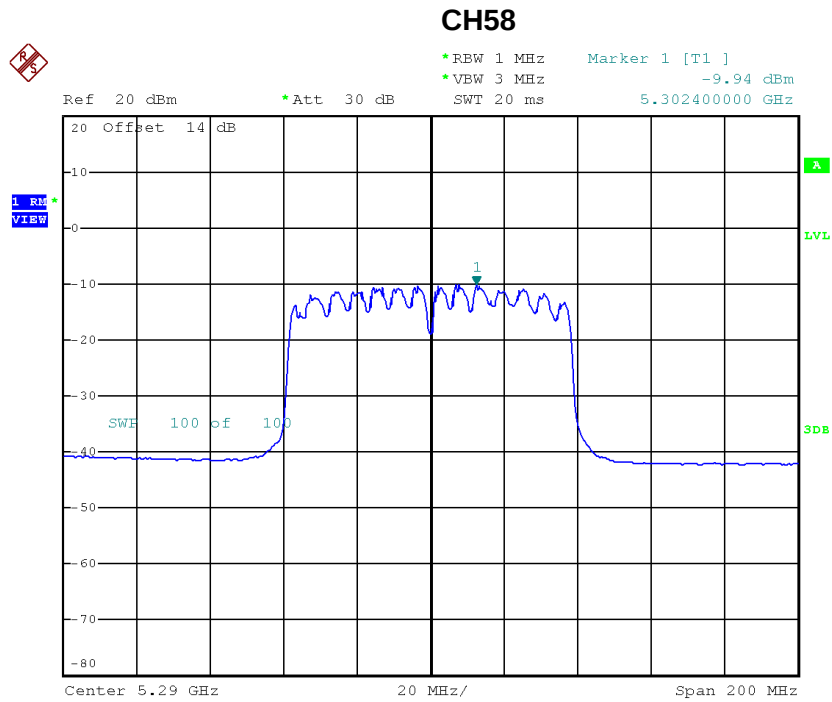

Date: 8.MAY.2017 16:28:48

Test Mode: UNII-2A/TX AC80 Mode_CH58_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	-9.84	0.00	-9.84	11.00

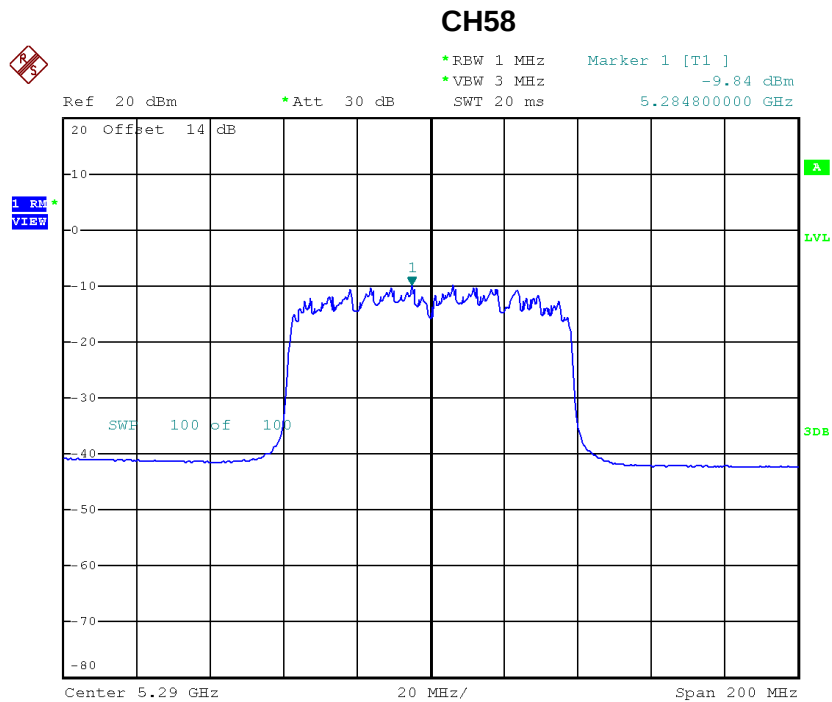

Date: 8.MAY.2017 16:42:26


Test Mode: UNII-2A/TX AC80 Mode_CH58_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH58	5290	-6.88	11.00

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_ANT 1


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-10.03	0.00	-10.03	11.00
CH122	5610	-9.51	0.00	-9.51	11.00

CH106

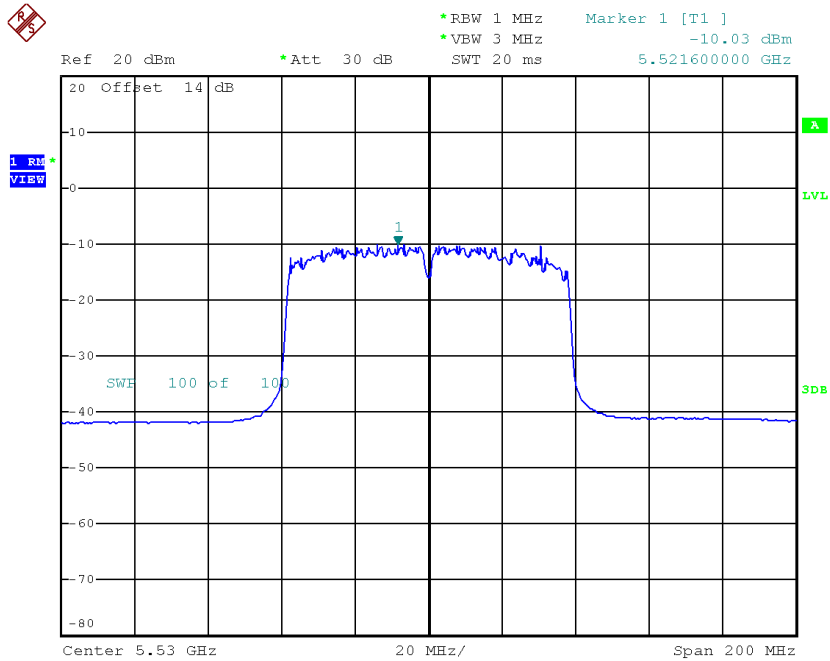

Date: 10.MAY.2017 16:24:49

CH122

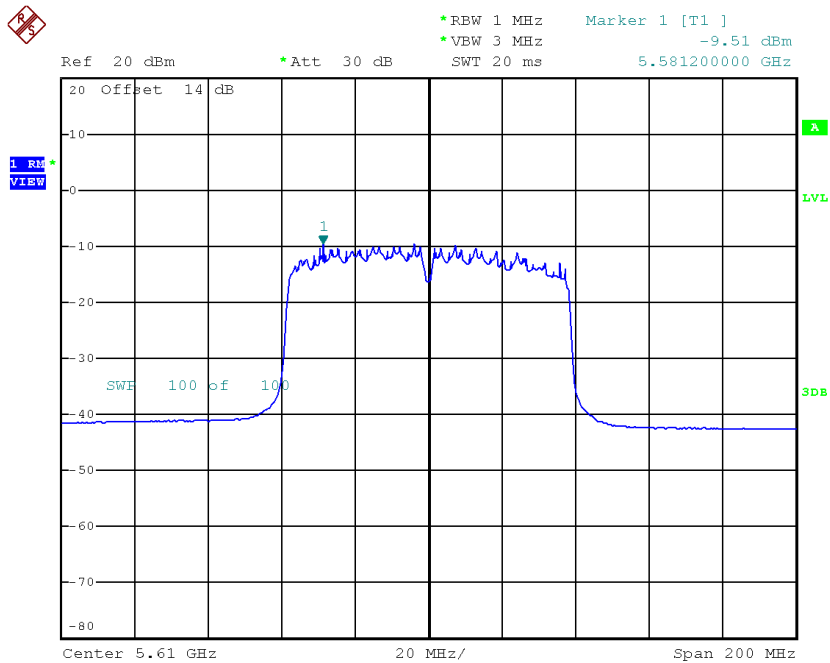


Date: 10.MAY.2017 16:28:04

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_ANT 2


Channel	Frequency (MHz)	Power Density (dBm/MHz)	Duty Factor	Power Density + Duty Factor (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-8.65	0.00	-8.65	11.00
CH122	5610	-8.85	0.00	-8.85	11.00

CH106

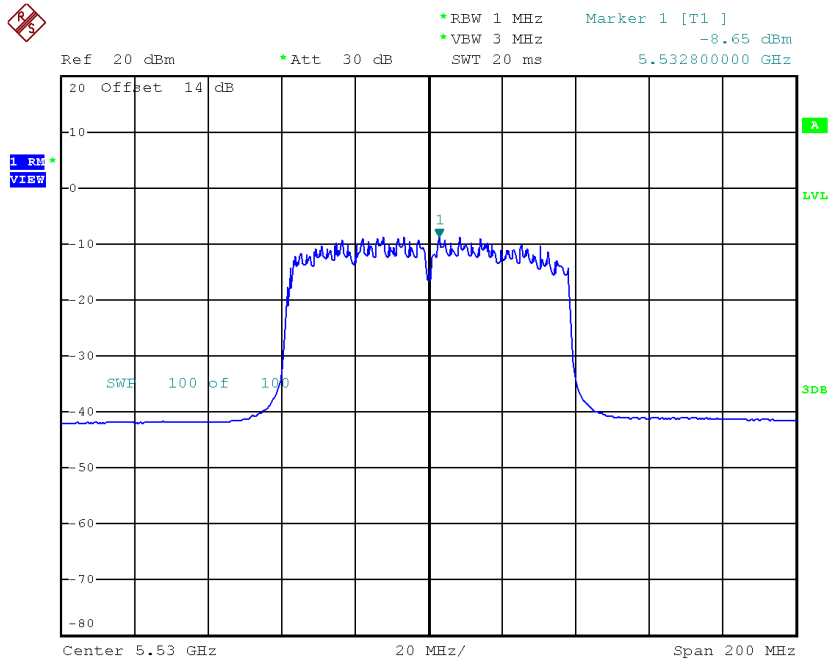

Date: 10.MAY.2017 16:25:44

CH122

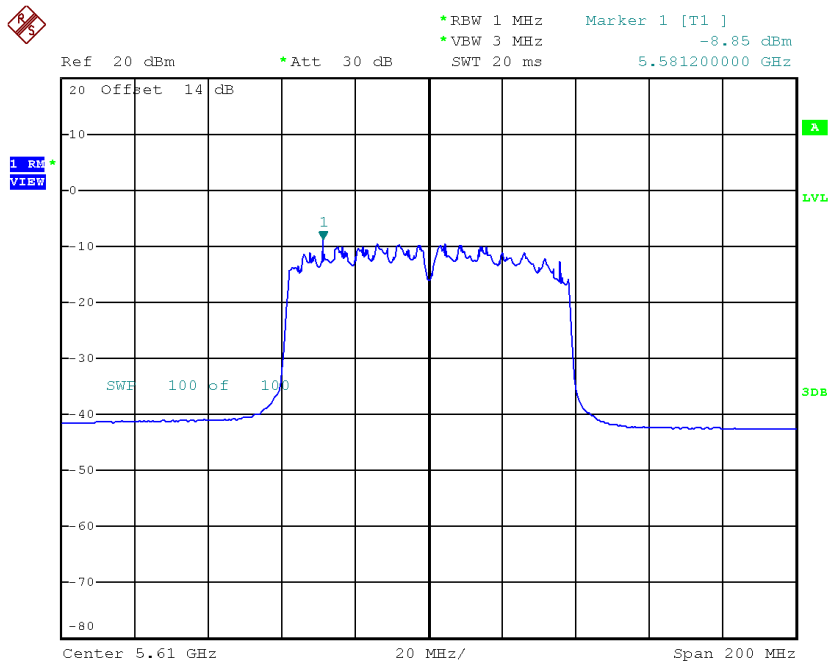

Date: 10.MAY.2017 16:27:12


Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122_Total

Channel	Frequency (MHz)	Power Density (dBm/MHz)	Limit (dBm/MHz)
CH106	5530	-6.28	11.00
CH122	5610	-6.16	11.00

Test Mode: UNII-3/ TX AC80 Mode_CH155_ANT 1

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-11.94	0.00	-11.94	30.00


TX CH155

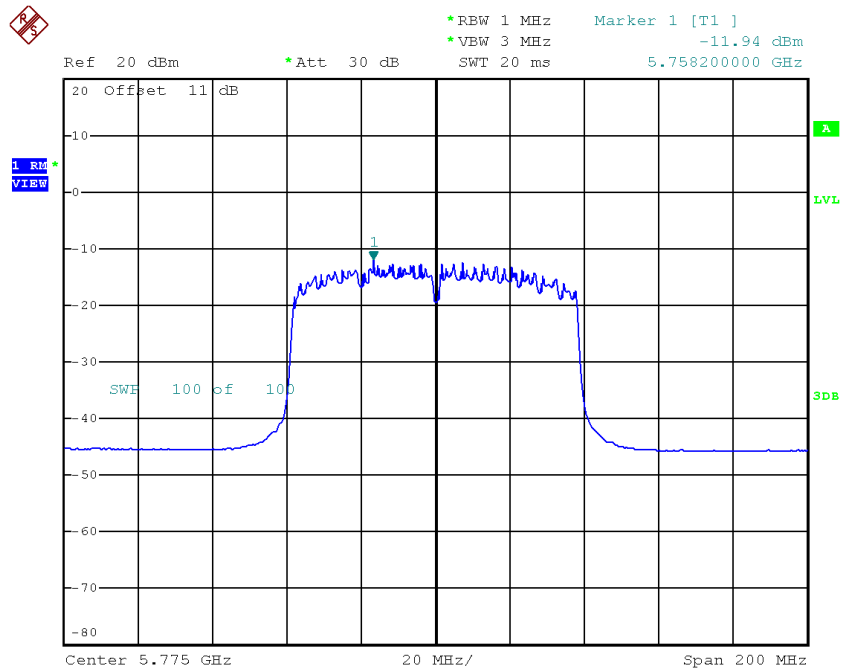

Date: 10.MAY.2017 16:29:58

Test Mode: UNII-3/ TX AC80 Mode_CH155_ANT 2

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Duty Factor	Power Density + Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-11.88	0.00	-11.88	30.00

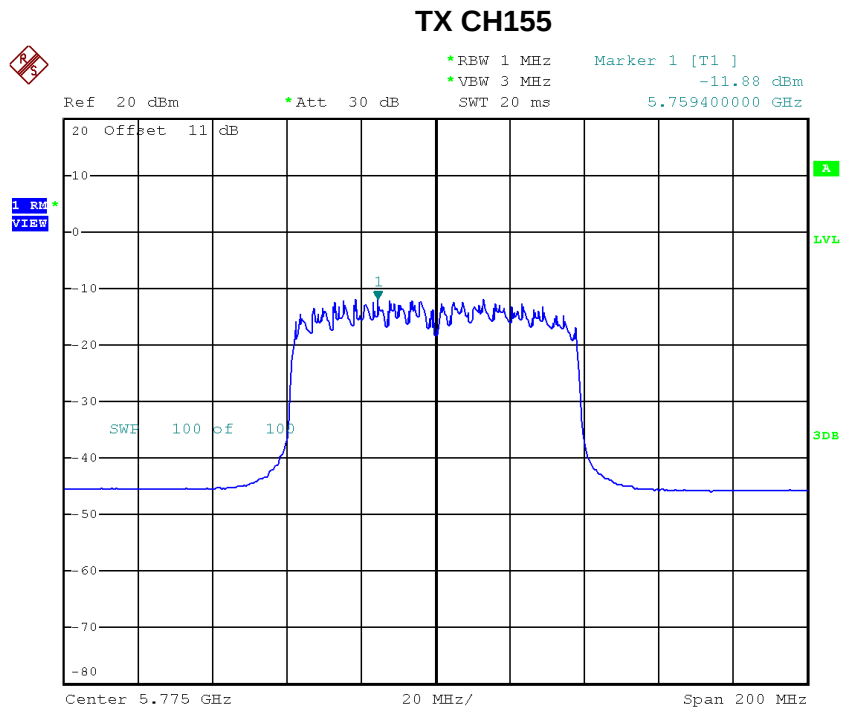

Date: 10.MAY.2017 16:30:52

Test Mode: UNII-3/ TX AC80 Mode_CH155_Total

Channel	Frequency (MHz)	Power Density (dBm/500kHz)	Limit (dBm/500kHz)
CH155	5775	-8.90	30.00

ATTACHMENT H - FREQUENCY STABILITY

Test Mode:	UNII-1
------------	--------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5180.0000
132	5179.9872
120	5179.9884
108	5179.9924
Max. Deviation (MHz)	0.0128
Max. Deviation (ppm)	2.4710

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5180.0000
-10	5180.0020
0	5180.0020
10	5180.0028
20	5180.0044
30	5180.0040
40	5180.0040
50	5180.0036
55	5180.0036
Max. Deviation (MHz)	0.0044
Max. Deviation (ppm)	0.8494

Test Mode:	UNII-2A
------------	---------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5260.0000
132	5260.0036
120	5260.0056
108	5260.0056
Max. Deviation (MHz)	0.0056
Max. Deviation (ppm)	1.0646

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5260.0000
-10	5260.0056
0	5260.0064
10	5260.0072
20	5260.0076
30	5260.0084
40	5260.0088
50	5260.0096
55	5260.0052
Max. Deviation (MHz)	0.0096
Max. Deviation (ppm)	1.8251

Test Mode:	UNII-2C
------------	---------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5500.0000
132	5500.0100
120	5500.0108
108	5500.0116
Max. Deviation (MHz)	0.0116
Max. Deviation (ppm)	2.1091

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5500.0000
-10	5500.0104
0	5500.0104
10	5500.0104
20	5500.0096
30	5500.0096
44	5500.0088
50	5500.0092
55	5500.0048
Max. Deviation (MHz)	0.0104
Max. Deviation (ppm)	1.8909

Test Mode:	UNII-3
------------	--------

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5745.0000
132	5745.0028
120	5745.0024
108	5745.0020
Max. Deviation (MHz)	0.0028
Max. Deviation (ppm)	0.4874

Temperature vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(°C)	5745.0000
-10	5745.0016
0	5745.0024
10	5745.0028
20	5745.0028
30	5745.0036
40	5745.0040
50	5745.0036
55	5745.0028
Max. Deviation (MHz)	0.0040
Max. Deviation (ppm)	0.6963